

CFR 47 FCC PART 15 SUBPART C

TEST REPORT

For

WIRELESS REARVIEW SYSTEM

MODEL NUMBER: BK-450

REPORT NUMBER: E04A26040520F00101

ISSUE DATE: June 17, 2026

FCC ID: 2A4NF-BK-450

Prepared for

GUANGZHOU PJ-AUTO ELECTRONIC TECHNOLOGY LIMITED

**Room 602, NO.15, Zhijie, Dongping Laowu village, Yongping street, Baiyun District,
Guangzhou, China**

Prepared by

Guangdong Global Testing Technology Co., Ltd.

**Room 101-105, 203-210, Building 1, No.2, Keji 8 Road, Songshan Lake Park,
Dongguan city, Guangdong, People's Republic of China, 523808**

**This report is based on a single evaluation of the submitted sample(s) of the above
mentioned product, it does not imply an assessment of the production of the products.**

**This report shall not be reproduced, except in full, without the written approval of
Guangdong Global Testing Technology Co., Ltd.**

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	June 17, 2026	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC 15.203 RSS-GEN Clause 6.8	Pass
AC Power Line Conducted Emission	ANSI C63.10-2020 Clause 6.2	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
Conducted Output Power	ANSI C63.10-2020 Clause 7.8.5	FCC 15.247 (b) (1) RSS-247 Clause 6.2.3.2	Pass
20 dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2020 Clause 6.9.2 & 6.9.3	FCC 15.247 (a) (1) RSS-247 Clause 6.2.3.1 (a) RSS-Gen Clause 6.7	Pass
Carrier Hopping Channel Separation	ANSI C63.10-2020 Clause 7.8.2	FCC 15.247 (a) (1) RSS-247 Clause 6.2.3.1 (a)	Pass
Number of Hopping Frequency	ANSI C63.10-2020 Clause 7.8.3	15.247 (a) (1) III RSS-247 Clause 6.2.3.1 (b)	Pass
Time of Occupancy (Dwell Time)	ANSI C63.10-2020 Clause 7.8.4	15.247 (a) (1) III RSS-247 Clause 6.2.3.1 (b)	Pass
Conducted Bandedge and Spurious Emission	ANSI C63.10-2020 Clause 6.10.4 & Clause 7.8.7	FCC 15.247 (d) RSS-247 Clause 6.6	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2020 Clause 6.4 & 6.5 & 6.6 & 7.8.8	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 6.6 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10	Pass
Duty Cycle	ANSI C63.10-2020, Clause 11.6	None; for reporting purposes only.	Pass

Note: For ISED, this report is also performed according to ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 standards.

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C> when <Accuracy Method> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY.....	7
3. FACILITIES AND ACCREDITATION.....	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>CHANNEL LIST</i>	<i>10</i>
5.3. <i>MAXIMUM CONDUCTED OUTPUT POWER.....</i>	<i>10</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>10</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	<i>10</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>11</i>
5.7. <i>SUPPORT UNITS FOR SYSTEM TEST.....</i>	<i>11</i>
5.8. <i>SETUP DIAGRAM</i>	<i>11</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	12
7. ANTENNA PORT TEST RESULTS	14
7.1. <i>Conducted Output Power.....</i>	<i>14</i>
7.2. <i>20 dB Bandwidth and 99% Occupied Bandwidth.....</i>	<i>15</i>
7.3. <i>Carrier Hopping Channel Separation</i>	<i>16</i>
7.4. <i>Number of Hopping Frequency</i>	<i>18</i>
7.5. <i>Time of Occupancy (Dwell Time)</i>	<i>19</i>
7.6. <i>Conducted Bandedge and Spurious Emission</i>	<i>21</i>
7.7. <i>Duty Cycle</i>	<i>23</i>
8. RADIATED TEST RESULTS.....	24
8.1. <i>Radiated Band edge and Spurious Emission</i>	<i>31</i>
9. ANTENNA REQUIREMENT	43
10. AC POWER LINE CONDUCTED EMISSION	45
11. TEST DATA - Appendix A.....	48

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: GUANGZHOU PJ-AUTO ELECTRONIC TECHNOLOGY LIMITED
Address: Room 602, NO.15, Zhijie, Dongping Laowu village, Yongping street, Baiyun District, Guangzhou, China

Manufacturer Information

Company Name: GUANGZHOU PARKVISION AUTO ELECTRONICS CO., LTD
Address: Room 601, Phase II of Baiyun Rail Transit and High-end Manufacturing R&D Base, No. 19-1 Kesheng Road, Guangzhou Private Science and Technology Park, Baiyun District, Guangzhou City, China

EUT Information

Product Description: WIRELESS REARVIEW SYSTEM
Model: BK-450
Series Model: BK-500, BK-450 Pro, BK-450 Max, BK-450 Ultra, BK-Pro X1, WRS-702, WRS-181-89HD, WRS-201CM, WRS-201A, WRS-213-89HD, WRS-224B, WRS-430, WRS-43D, WRS-05, WRS-50AI, WRS-50D, WRS-50D-EU, WRS-50HD, WRS-500, WRS-500AI, WRS-502, WRS-502CH, WRS-502DR, WRS-503, WRS-504, WRS-505, WRS-700, WRS-702A, WRS-702B, WRS-702Q, WRS-702RS, WRS-703, WRS-704, WRS-704C, WRS-716, WRS-717, WRS-718, WRS-SC708, WRS-900, WRS-900RS, WRS-902, WRS-902C, WRS-902RS, WRS-902Q, WRS-1010, WRS-1010RS, WRS-1010Q, WRS-1011, WRS-1011RS, WRS-1011AI, WRS-1012, WRS-1013, WRS-1014X, WRS-1016, WRS-1016RS, PJ-WRM, WRM-01, WRM-02, WRC-03, WRC-04, WRC-05, WRC-06, WRC-07, WRC-08, WRC-09, AT-7SM1080, PJ-7SM1080, WRS-1015X, WRS-702AI, WRS-550, WRM-03AP, BA501AHD, BA502AHD, BA503AHD, BA504AHD, BA505AHD, BA506AHD, BA507AHD, BA601AHD, BA602AHD, BA603AHD, AD-21, AD-22, AD-23, AD-24, A3S-2, A3S-3, A3S-4, PJ-1010BSD-N, AI-360AVM-N4, AI-360AVM-N8
Brand: PARKVISION
Sample Received Date: April 22, 2026
Sample Status: Normal
Sample ID: A26040520 001
Date of Tested: April 22, 2026 to June 17, 2026

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	Pass

Prepared By:

Win Huang

Win Huang
Project Engineer

Checked By:

Alan He

Alan He
Laboratory Leader

Approved By:

Alan He

Alan He
Laboratory Manager



2. TEST METHODOLOGY

All tests were performed in accordance with the standard FCC 47 CFR PART 15 SUBPART C, ISED RSS-247 Issue 4, KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, FCC 47 CFR Part 2, ANSI C63.10-2020, ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 and ISED RSS-GEN Issue 5.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 6947.01) Guangdong Global Testing Technology Co., Ltd. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1343) Guangdong Global Testing Technology Co., Ltd. has been recognized to perform compliance testing on equipment subject to Supplier's Declaration of Conformity (SDoC) and Certification rules ISED (Company No.: 30714) Guangdong Global Testing Technology Co., Ltd. has been registered and fully described in a report filed with ISED. The Company Number is 30714 and the test lab Conformity Assessment Body Identifier (CABID) is CN0148.
---------------------------	--

Note: All tests measurement facilities use to collect the measurement data are located at Room 101-105, 203-210, Building 1, No.2, Keji 8 Road, Songshan Lake Park, Dongguan city, Guangdong, People’s Republic of China, 523808

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Items	k	Uncertainty
DTS Bandwidth	1.96	±9.2 PPM
20dB Emission Bandwidth	1.96	±9.2 PPM
Carrier Frequency Separation	1.96	±9.2 PPM
Time of Occupancy	1.96	±0.57%
Conducted Output Power	1.96	±1.5 dB
Power Spectral Density Level	1.96	±1.9 dB
Conducted Spurious Emission	1.96	9 kHz-30 MHz: ± 0.95 dB 30 MHz-1 GHz: ± 1.5 dB 1GHz-12.75GHz: ± 1.8 dB 12.75 GHz-26.5 GHz: ± 2.1dB
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.		

Test Item	Measurement Frequency Range	K	U(dB)
Conducted emissions from the AC mains power ports (AMN)	150 kHz ~ 30 MHz	2	3.37
Radiated emissions	9 kHz ~ 30 MHz	2	4.16
Radiated emissions	30 MHz ~ 1 GHz	2	3.79
Radiated emissions	1 GHz ~ 18 GHz	2	5.62
Radiated emissions	18 GHz ~ 40 GHz	2	5.54
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.			

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name		WIRELESS REARVIEW SYSTEM
Model		BK-450
Series Model		BK-500, BK-450 Pro, BK-450 Max, BK-450 Ultra, BK-Pro X1, WRS-702, WRS-181-89HD, WRS-201CM, WRS-201A, WRS-213-89HD, WRS-224B, WRS-430, WRS-43D, WRS-05, WRS-50AI, WRS-50D, WRS-50D-EU, WRS-50HD, WRS-500, WRS-500AI, WRS-502, WRS-502CH, WRS-502DR, WRS-503, WRS-504, WRS-505, WRS-700, WRS-702A, WRS-702B, WRS-702Q, WRS-702RS, WRS-703, WRS-704, WRS-704C, WRS-716, WRS-717, WRS-718, WRS-SC708, WRS-900, WRS-900RS, WRS-902, WRS-902C, WRS-902RS, WRS-902Q, WRS-1010, WRS-1010RS, WRS-1010Q, WRS-1011, WRS-1011RS, WRS-1011AI, WRS-1012, WRS-1013, WRS-1014X, WRS-1016, WRS-1016RS, PJ-WRM, WRM-01, WRM-02, WRC-03, WRC-04, WRC-05, WRC-06, WRC-07, WRC-08, WRC-09, AT-7SM1080, PJ-7SM1080, WRS-1015X, WRS-702AI, WRS-550, WRM-03AP, BA501AHD, BA502AHD, BA503AHD, BA504AHD, BA505AHD, BA506AHD, BA507AHD, BA601AHD, BA602AHD, BA603AHD, AD-21, AD-22, AD-23, AD-24, A3S-2, A3S-3, A3S-4, PJ-1010BSD-N, AI-360AVM-N4, AI-360AVM-N8
Model Difference		Note: The differences are limited to AI intelligent recognition, radar ranging, improvement in picture quality/sustainability, appearance packaging and accessory configuration, and do not affect FCC compliance.
Hardware Version		V1.2
Software Version		V1.0
Ratings		5V = 2.5A
Power Supply	AC	120V 60Hz
	DC	5V
	Battery	DC 3.7V, 3000mAh, 11.1Wh

Frequency Band:	2400 MHz to 2483.5 MHz
Frequency Range:	2410 MHz to 2473 MHz
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Type of Modulation:	GFSK
Number of Channels:	19
Channel Separation:	3.5 MHz
Maximum Peak Power:	15.83 dBm
Antenna Type:	PCB Antenna
Antenna Gain:	0.51 dBi
Normal Test Voltage:	5 V
EUT Test software:	SecureCRT

Note:

The Antenna Gain was provided by customer, and this information may affect the validity of the results, customer should be responsible for this.

5.2. CHANNEL LIST

Channel	Frequency (MHz)
1	2410
2	2413.5
3	2417
4	2420.5
5	2424
6	2427.5
7	2431
8	2434.5
9	2438
10	2441.5
11	2445
12	2448.5
13	2452
14	2455.5
15	2459
16	2462.5
17	2466
18	2469.5
19	2473

5.3. MAXIMUM CONDUCTED OUTPUT POWER

Test Mode	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)	Maximum EIRP (dBm)
GFSK	2410 ~ 2473	1-19[19]	15.83	/

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
GFSK	CH 1(Low Channel), CH 10(MID Channel), CH 19(High Channel)	2410 MHz, 2441.5 MHz, 2473 MHz

Note: The hop is hopping mode.

5.5. THE WORSE CASE POWER SETTING PARAMETER

WORST-CASE CONFIGURATIONS

Modulation Technology	Modulation Type
FHSS	GFSK

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band	
Test Software	SecureCRT

Modulation Type	Transmit Antenna Number	Test Software setting value		
		CH 1	CH 10	CH 19
GFSK	1	Default	Default	Default

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2410-2473	PCB	0.51

Test Mode	Transmit and Receive Mode	Description
GFSK	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

5.7. SUPPORT UNITS FOR SYSTEM TEST

The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Laptop	Lenovo	T14	/	GTG Support
E-2	Adapter	Xiaomi	MDY-11-EX	N/A	GTG Support
E-3	Serial Port Tool	N/A	N/A	N/A	GTG Support

The following cables were used to form a representative test configuration during the tests.

Item	Type of cable	Shielded Type	Ferrite Core	Length
C-1	USB cable	Unshielded	without ferrite	1.5 m
C-2	Dupont cable	Unshielded	without ferrite	0.6 m

5.8. SETUP DIAGRAM

Radiated emissions & AC Power Line Conducted Emission:



6. MEASURING EQUIPMENT AND SOFTWARE USED

Test Equipment of Conducted RF					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Spectrum Analyzer	Rohde & Schwarz	FSV40	102257	2025/08/25	2026/08/24
Spectrum Analyzer	KEYSIGHT	N9020A	MY51285127	2025/08/25	2026/08/24
EXG Analog Signal Generator	KEYSIGHT	N5173B	MY61253075	2025/08/25	2026/08/24
Vector Signal Generator	Rohde & Schwarz	SMM100A	101899	2025/08/25	2026/08/24
RF Control box	MWRF-test	MW100-RFCB	MW220926GTG	2025/08/25	2026/08/24
Wideband Radio Communication Tester	Rohde & Schwarz	CMW270	102792	2025/08/25	2026/08/24
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	103235	2025/08/25	2026/08/24
temperature humidity chamber	Espec	SH-241	SH-241-2014	2025/08/25	2026/08/24
RF Test Software	MWRF-test	MTS8310E (Ver. V2/0)	N/A	N/A	N/A

Test Equipment of Radiated emissions below 1GHz					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
3m Semi-anechoic Chamber	ETS	9m*6m*6m	Q2146	2025/08/23	2026/08/22
EMI Test Receiver	Rohde & Schwarz	ESCI3	101144	2025/08/23	2026/08/22
Pre-Amplifier	HzEMC	HPA-9K0130	HYPA21001	2025/08/23	2026/08/22
Biconilog Antenna	Schwarzbeck	VULB 9168	01315	2025/09/20	2028/09/19
Biconilog Antenna	ETS	3142E	00243651	2025/02/22	2028/02/21
Loop Antenna	ETS	6502	00243668	2025/02/22	2028/02/21
Test Software	Farad	EZ-EMC (Ver.FA-03A2 RE)	N/A	N/A	N/A

Test Equipment of Radiated emissions above 1GHz					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
3m Semi-anechoic Chamber	ETS	9m*6m*6m	Q2149	2025/08/23	2026/08/22
Spectrum Analyzer	Rohde & Schwarz	FSV40	101413	2025/08/23	2026/08/22
Pre-Amplifier	HzEMC	HPA-1G1850	HYPA21003	2025/08/23	2026/08/22
Horn antenna	ETS	3117	00246069	2025/02/22	2028/02/21
Pre-Amplifier	HzEMC	HPA-184057	HYPA21004	2025/08/23	2026/08/22
Horn antenna	ETS	3116C	00246265	2025/02/22	2028/02/21
RF Filter Bank	HzEMC	HSW-F18	HSWF2218E01	2025/08/23	2026/08/22

RF Filter Bank	HzEMC	HPF18	HPF2218E02	2025/08/23	2026/08/22
Test Software	Farad	EZ-EMC (Ver.FA-03A2 RE+)	N/A	N/A	N/A

Test Equipment of Conducted emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Shielded Room	CHENG YU	8m*5m*4m	N/A	2025/08/23	2026/08/22
EMI Test Receiver	Rohde & Schwarz	ESR3	102647	2025/08/23	2026/08/22
LISN/AMN	Rohde & Schwarz	ENV216	102843	2025/08/23	2026/08/22
NNLK 8129 RC	Schwarzbeck	NNLK 8129 RC	5046	2025/08/23	2026/08/22
Test Software	Farad	EZ-EMC (Ver. EMC-con-3A1 1+)	N/A	N/A	N/A

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS


CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 47 CFR 15.247 (b) (1) ISED RSS-247 Clause 6.2.3.2	Peak Conduct Output Power	Hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel: 1 watt or 30 dBm; Hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel: 125 mW or 21 dBm	2400-2483.5

TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor and meter or Spectrum analyzer (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

TEST SETUP



TEST ENVIRONMENT

Temperature	25.2°C	Relative Humidity	50%
Atmosphere Pressure	101kPa		

TEST RESULTS

Please refer to section "Test Data" - Appendix A

7.2. 20 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 47 CFR 15.247 (a) (1) RSS-247 Clause 6.2.3.1 (a)	20 dB Bandwidth	None; for reporting purposes only.	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	None; for reporting purposes only.	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2020 clause 6.9.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 20 dB Bandwidth: 1 % to 5 % of the 20 dB bandwidth For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 20 dB Bandwidth: approximately 3×RBW For 99 % Occupied Bandwidth: ≥ 3×RBW
Span	Between 2 times and 5.0 times the OBW
Trace	Max hold
Sweep	Auto couple

a) Use the occupied bandwidth function of the instrument, allow the trace to stabilize and report the measured 99 % occupied bandwidth and 20 dB Bandwidth.

TEST SETUP



TEST ENVIRONMENT

Temperature	25.2°C	Relative Humidity	50%
Atmosphere Pressure	101kPa		

TEST RESULTS

Please refer to section "Test Data" - Appendix A

7.3. CARRIER HOPPING CHANNEL SEPARATION

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 47 CFR 15.247 (a) (1) ISED RSS-247 Clause 6.2.3.1 (a)	Carrier Frequency Separation	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 7.8.2.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	≥RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize and use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined.

TEST SETUP



TEST ENVIRONMENT

Temperature	25.2°C	Relative Humidity	50%
Atmosphere Pressure	101kPa		

TEST RESULTS

Please refer to section "Test Data" - Appendix A

7.4. NUMBER OF HOPPING FREQUENCY

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4		
Section	Test Item	Limit
FCC 47 CFR 15.247 (a) (1) III ISED RSS-247 Clause 6.2.3.1 (b)	Number of Hopping Frequency	at least 15 hopping channels

TEST PROCEDURE


Refer to ANSI C63.10-2020 clause 7.8.3.

Connect the EUT to the spectrum Analyzer and use the following settings:

Detector	Peak
RBW	To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW	≥RBW
Span	The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
Trace	Max hold
Sweep time	Auto couple

Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer, count the quantity of peaks to get the number of hopping channels.

TEST SETUP



TEST ENVIRONMENT

Temperature	25.2°C	Relative Humidity	50%
Atmosphere Pressure	101kPa		

TEST RESULTS

Please refer to section "Test Data" - Appendix A

7.5. TIME OF OCCUPANCY (DWELL TIME)

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4		
Section	Test Item	Limit
FCC 47 CFR 15.247 (a) (1) III ISED RSS-247 Clause 6.2.3.1 (b)	Time of Occupancy (Dwell Time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 7.8.4.

Connect the EUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1 MHz
VBW	≥RBW
Span	Zero span, centered on a hopping channel
Trace	Max hold
Sweep time	As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel

Use the marker-delta function to determine the transmit time per hop (Burst Width). If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.


For FHSS Mode (19 Channel):

Dwell Time: Pulse Time * Burst Count.

Note:

1. Pulse Time: The time of a single pulse.
2. Burst Count: The number of pulses observed during a 31.6s period.

TEST SETUP



TEST ENVIRONMENT

Temperature	25.2°C	Relative Humidity	50%
Atmosphere Pressure	101kPa		

TEST RESULTS

Please refer to section "Test Data" - Appendix A

7.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSION

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4		
Section	Test Item	Limit
FCC 47 CFR §15.247 (d) ISED RSS-247 6.6	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 7.8.7.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x 20dB bandwidth
Trace	Max hold
Sweep time	Auto couple.


Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum

TEST SETUP



TEST ENVIRONMENT

Temperature	25.2°C	Relative Humidity	50%
Atmosphere Pressure	101kPa		

TEST RESULTS

Please refer to section "Test Data" - Appendix A

7.7. DUTY CYCLE


LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2020 Zero – Span Spectrum Analyzer method.

TEST SETUP



TEST ENVIRONMENT

Temperature	25.2°C	Relative Humidity	50%
Atmosphere Pressure	101kPa		

TEST RESULTS

Please refer to section "Test Data" - Appendix A

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC 47 CFR §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz-1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52625	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST PROCEDURE**Below 30 MHz**

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X KHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.7.ON TIME AND DUTY CYCLE.


X axis, Y axis, Z axis positions:

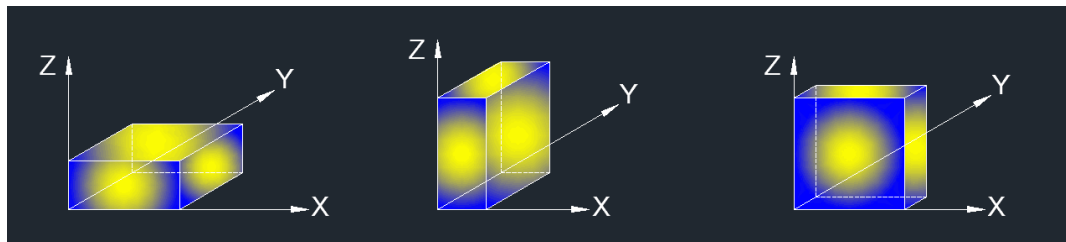

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

TEST SETUP

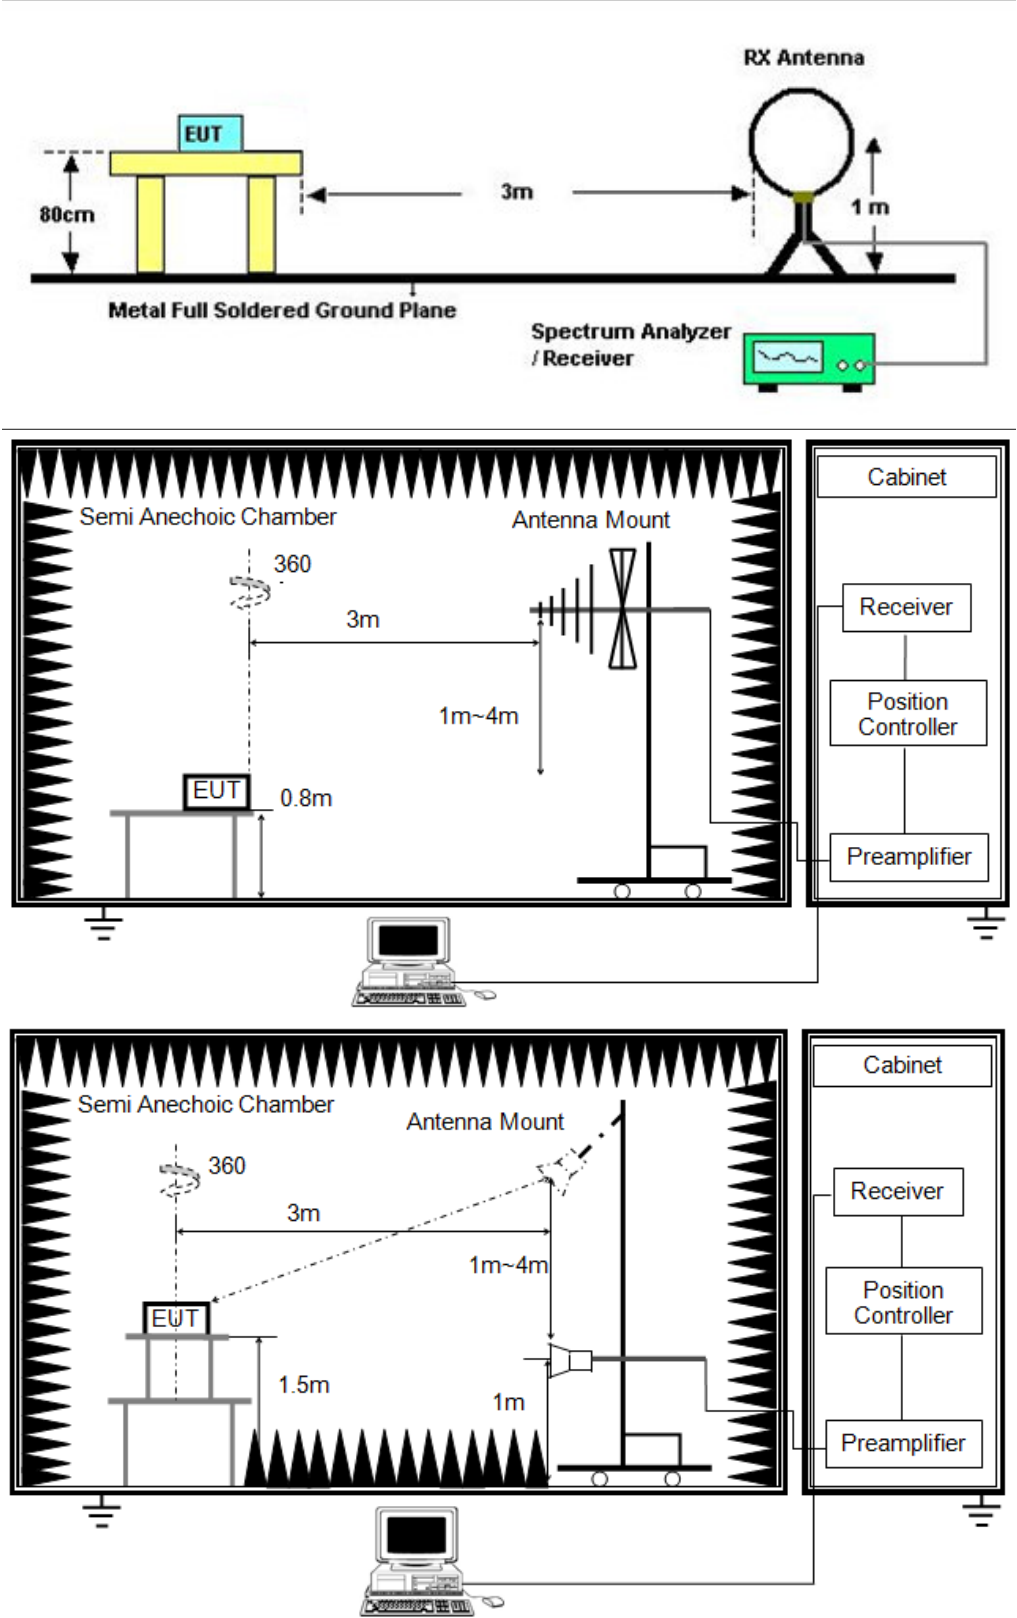

TEST ENVIRONMENT

Temperature	23.9℃	Relative Humidity	51%
-------------	-------	-------------------	-----

Atmosphere Pressure	101kPa		
---------------------	--------	--	--


TEST RESULTS

8.1. RADIATED BAND EDGE AND SPURIOUS EMISSION

Undesirable radiated Spurious Emission below 1GHz (30MHz to 1GHz)

All modes have been tested and the worst result as bellow:

Mode:	2.4G-2410
Power:	DC 5V
TE:	Berny
Date	2026/5/9
T/A/P	23.9°C/51%/101Kpa

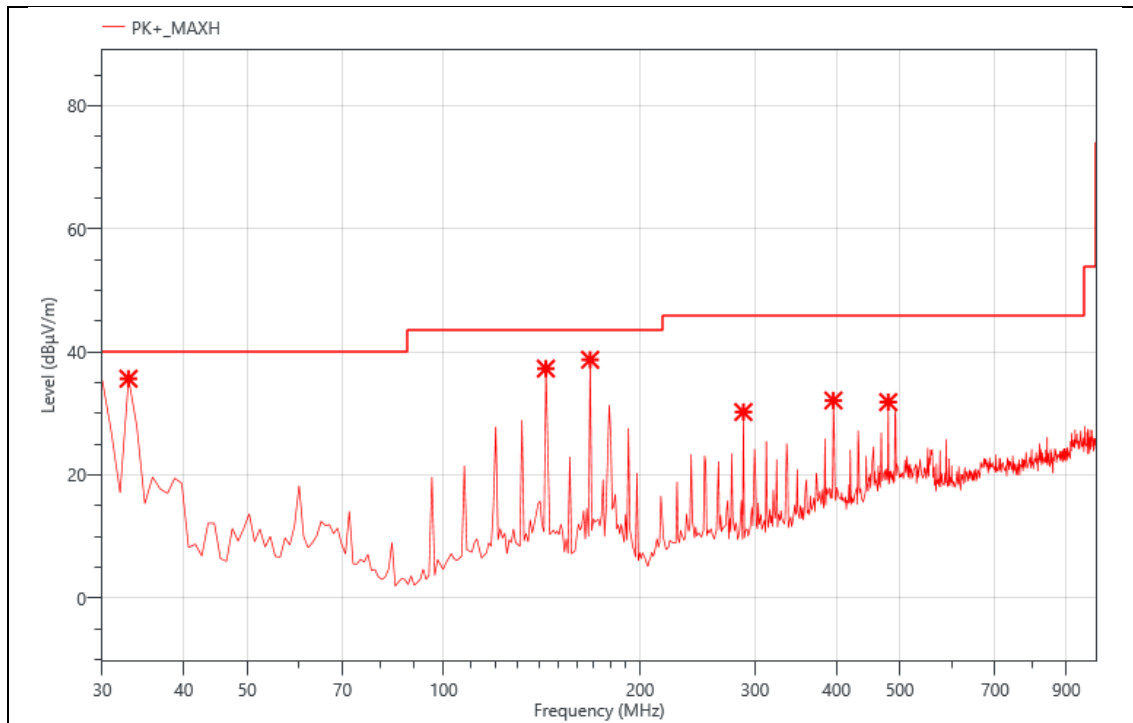


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	32.910	51.68	-16.04	35.64	40.00	4.36	PK+	V
2	143.490	60.29	-23.01	37.28	43.50	6.22	PK+	V
3	167.740	61.02	-22.3	38.72	43.50	4.78	PK+	V
4	288.020	49.63	-19.4	30.23	46.00	15.77	PK+	V
5	395.690	45.90	-13.79	32.11	46.00	13.89	PK+	V
6	480.080	44.50	-12.66	31.84	46.00	14.16	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	2.4G-2410
Power:	DC 5V
TE:	Berny
Date	2026/5/9
T/A/P	23.9°C/51%/101Kpa

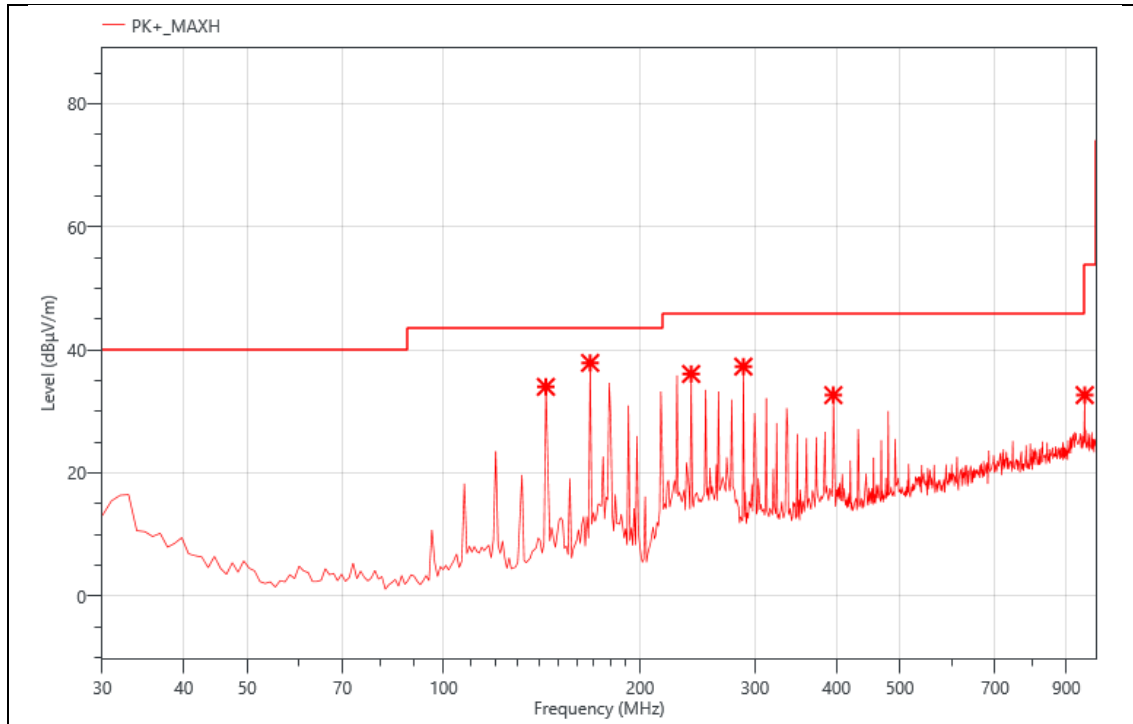

Critical_Freqs


No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	143.490	57.00	-23.01	33.99	43.50	9.51	PK+	H
2	167.740	60.18	-22.3	37.88	43.50	5.62	PK+	H
3	239.520	55.34	-19.26	36.08	46.00	9.92	PK+	H
4	288.020	56.68	-19.4	37.28	46.00	8.72	PK+	H
5	395.690	46.44	-13.79	32.65	46.00	13.35	PK+	H
6	960.230	35.48	-2.82	32.66	53.90	21.24	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

All modes have been tested and the worst result as bellow:


Mode:	2.4G-2410
Power:	DC 5V
TE:	Berny
Date	2026/5/9
T/A/P	23.9°C/51%/101Kpa

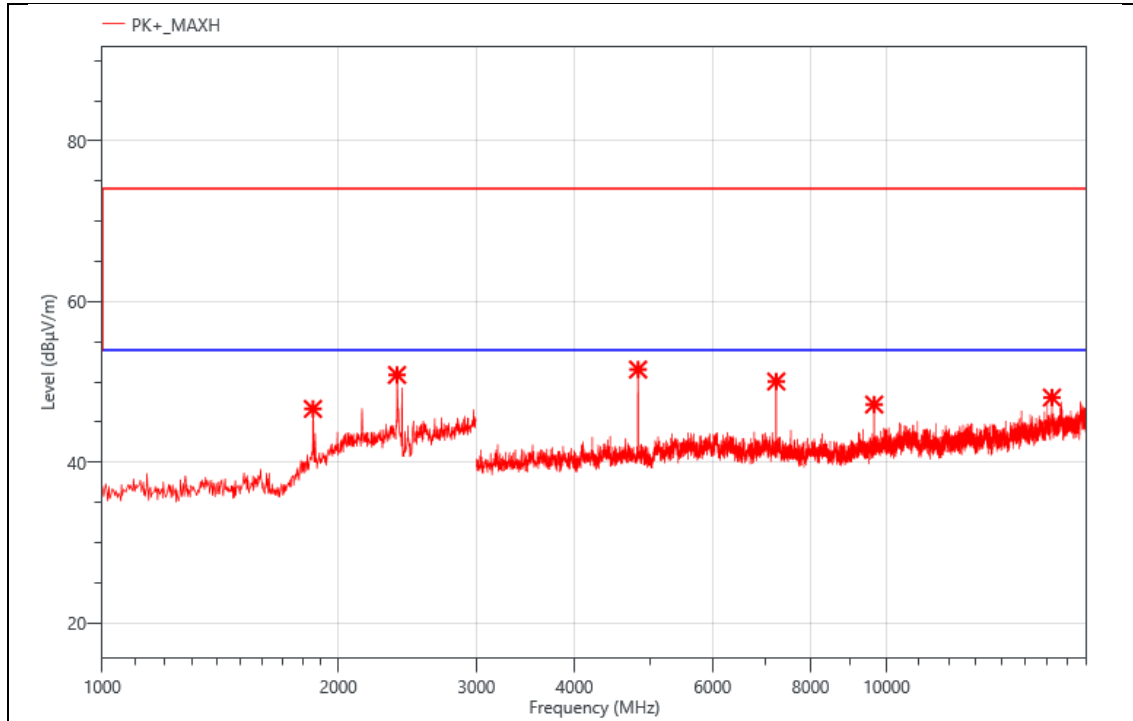**Critical_Freqs**

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1856.000	57.09	-10.44	46.65	74.00	27.35	PK+	H
2	2376.000	59.38	-8.5	50.88	74.00	23.12	PK+	H
3	4821.000	63.00	-11.45	51.55	74.00	22.45	PK+	H
4	7233.000	58.19	-8.12	50.07	74.00	23.93	PK+	H
5	9643.500	54.04	-6.84	47.20	74.00	26.80	PK+	H
6	16251.000	48.67	-0.6	48.07	74.00	25.93	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	2.4G-2410
Power:	DC 5V
TE:	Berny
Date	2026/5/9
T/A/P	23.9°C/51%/101Kpa

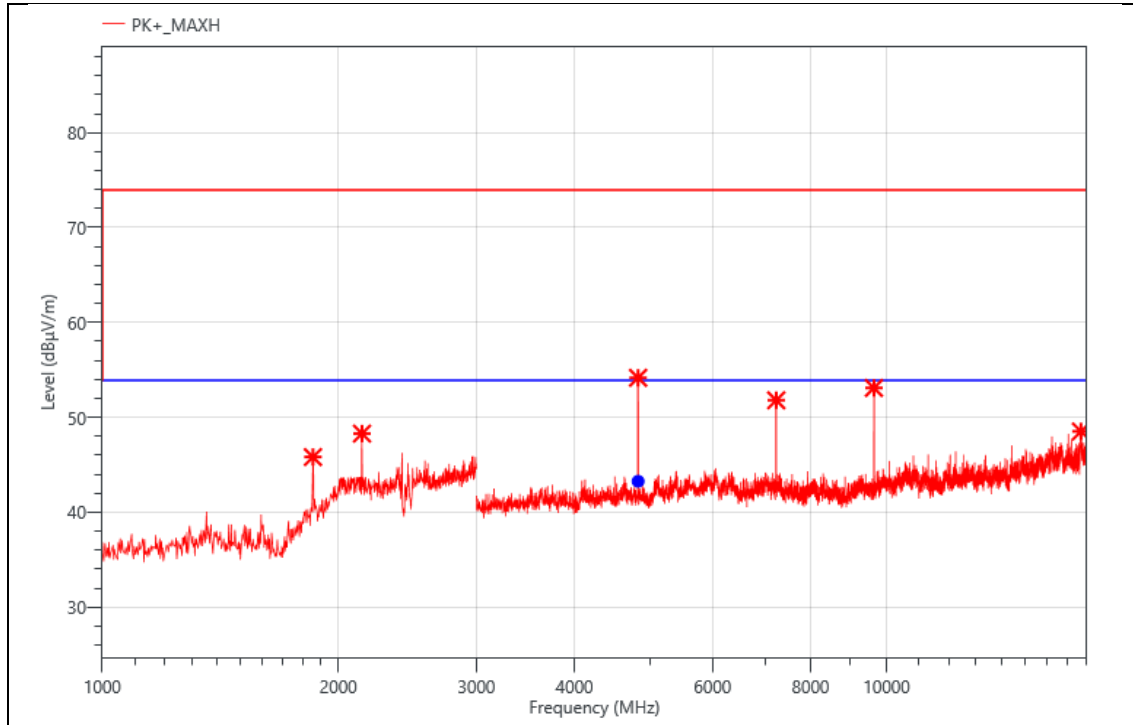

Critical_Freqs


No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1856.000	56.26	-10.44	45.82	74.00	28.18	PK+	V
2	2144.000	57.34	-9.05	48.29	74.00	25.71	PK+	V
3	4821.000	65.62	-11.45	54.17	74.00	19.83	PK+	V
4	7233.000	59.92	-8.12	51.80	74.00	22.20	PK+	V
5	9636.000	60.03	-6.93	53.10	74.00	20.90	PK+	V
6	17698.500	48.33	0.19	48.52	74.00	25.48	PK+	V

Final_Result

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	4820.993	54.72	-11.45	43.27	53.90	10.63	AVG	V	PASS

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	2.4G-2441.5
Power:	DC 5V
TE:	Berny
Date	2026/5/9
T/A/P	23.9°C/51%/101Kpa

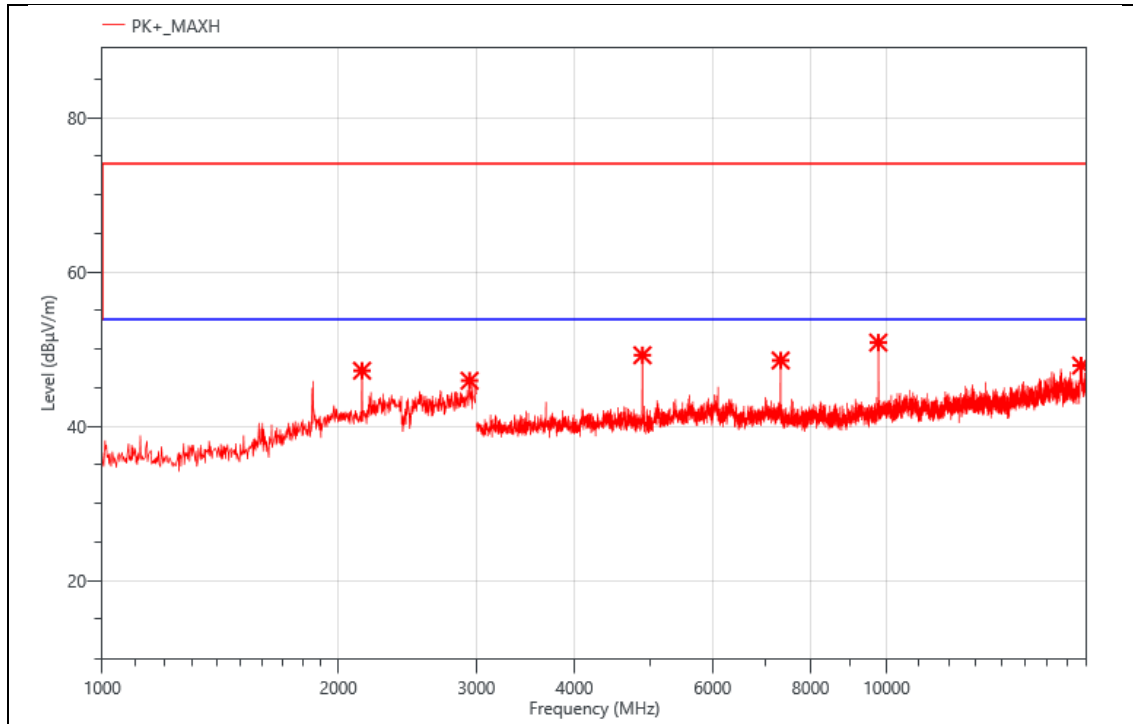


Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2144.000	56.25	-9.05	47.20	74.00	26.80	PK+	H
2	2940.000	53.39	-7.48	45.91	74.00	28.09	PK+	H
3	4884.000	60.36	-11.15	49.21	74.00	24.79	PK+	H
4	7327.500	56.62	-8.09	48.53	74.00	25.47	PK+	H
5	9762.000	57.80	-6.95	50.85	74.00	23.15	PK+	H
6	17709.000	47.90	-0.02	47.88	74.00	26.12	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	2.4G-2441.5
Power:	DC 5V
TE:	Berny
Date	2026/5/9
T/A/P	23.9°C/51%/101Kpa

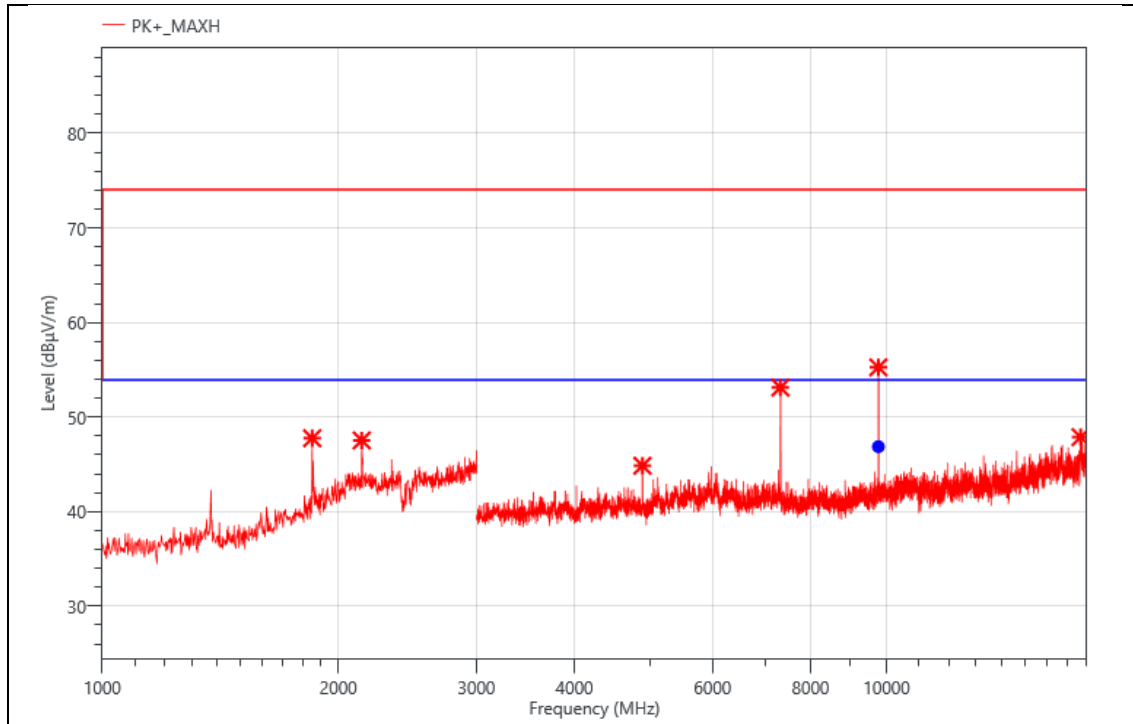

Critical_Freqs


No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1852.000	58.23	-10.47	47.76	74.00	26.24	PK+	V
2	2142.000	56.58	-9.05	47.53	74.00	26.47	PK+	V
3	4884.000	56.00	-11.15	44.85	74.00	29.15	PK+	V
4	7321.500	61.03	-7.91	53.12	74.00	20.88	PK+	V
5	9762.000	62.21	-6.95	55.26	74.00	18.74	PK+	V
6	17676.000	47.57	0.31	47.88	74.00	26.12	PK+	V

Final_Result

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	9762.007	53.82	-6.95	46.87	53.90	7.03	AVG	V	PASS

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	2.4G-2473
Power:	DC 5V
TE:	Berny
Date	2026/5/9
T/A/P	23.9°C/51%/101Kpa

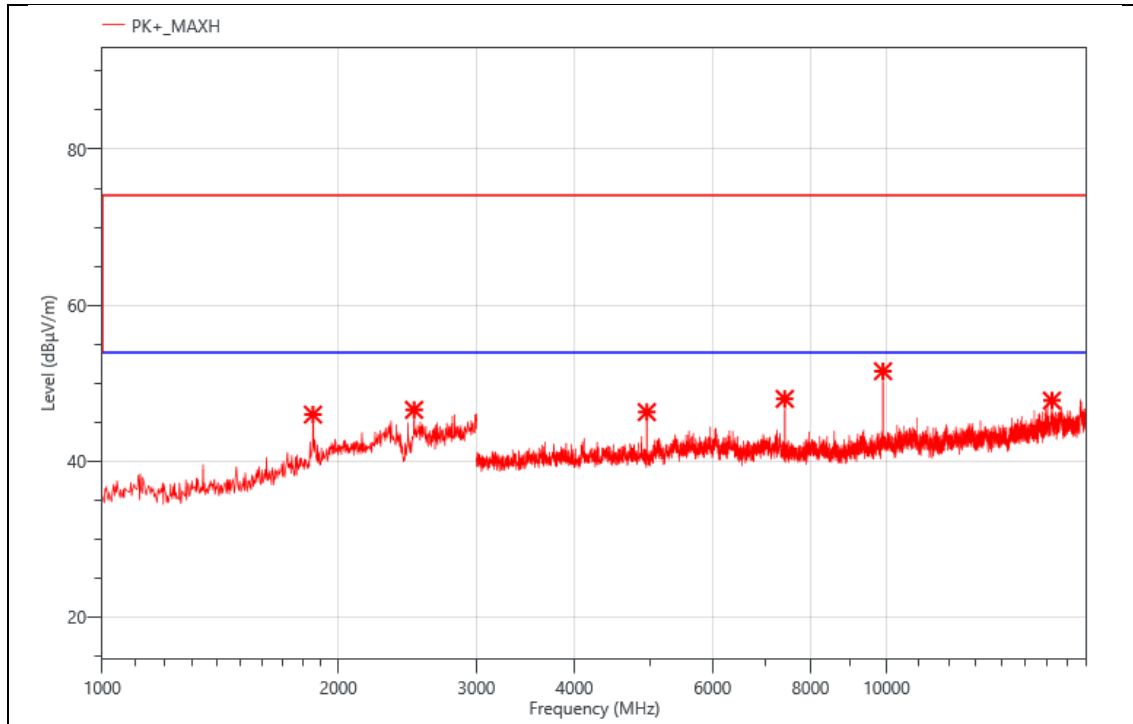


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1856.000	56.40	-10.44	45.96	74.00	28.04	PK+	H
2	2498.000	54.98	-8.41	46.57	74.00	27.43	PK+	H
3	4947.000	57.53	-11.25	46.28	74.00	27.72	PK+	H
4	7416.000	56.01	-8.03	47.98	74.00	26.02	PK+	H
5	9895.500	58.19	-6.67	51.52	74.00	22.48	PK+	H
6	16249.500	48.32	-0.56	47.76	74.00	26.24	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	2.4G-2473
Power:	DC 5V
TE:	Berny
Date	2026/5/9
T/A/P	23.9°C/51%/101Kpa

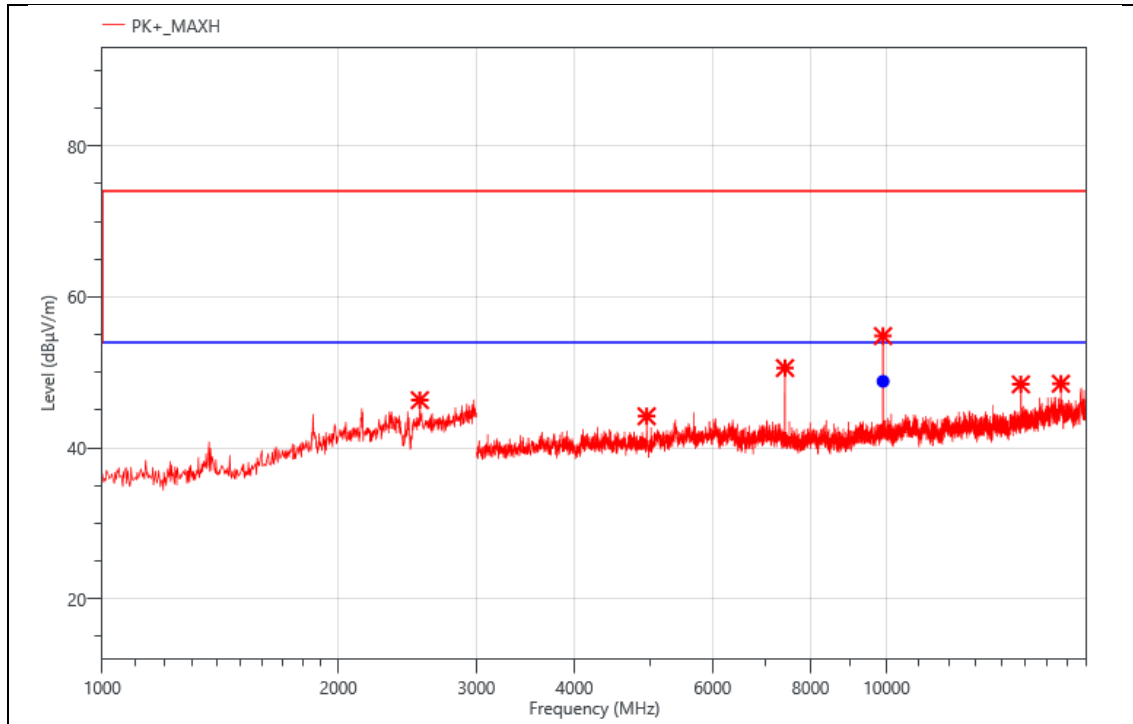

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2540.000	54.73	-8.42	46.31	74.00	27.69	PK+	V
2	4944.000	55.39	-11.21	44.18	74.00	29.82	PK+	V
3	7422.000	58.56	-7.99	50.57	74.00	23.43	PK+	V
4	9895.500	61.48	-6.67	54.81	74.00	19.19	PK+	V
5	14832.000	51.59	-3.18	48.41	74.00	25.59	PK+	V
6	16684.500	48.98	-0.49	48.49	74.00	25.51	PK+	V

Final_Result

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	9895.500	55.48	-6.67	48.81	53.90	5.09	AVG	V	PASS


Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

For 9KHz to 30MHz and above 18 GHz, a pre-scan was performed, and the result was 20 dB lower than the limit line, the test data was not shown in the report.

Band Edge

All modes have been tested and the worst result as bellow:

Mode:	2.4G-2410
Power:	DC 5V
TE:	Berny
Date	2026/5/9
T/A/P	23.9°C/51%/101Kpa

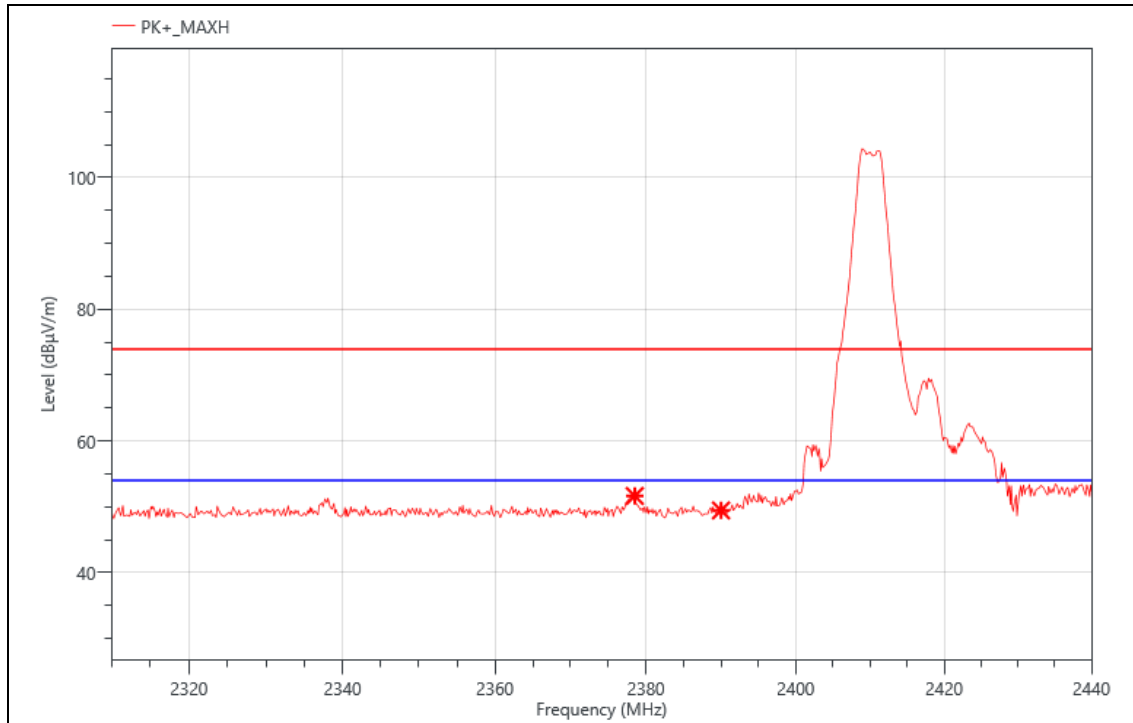


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2378.510	29.11	22.54	51.65	74.00	22.35	PK+	V
2	2390.000	26.74	22.72	49.46	74.00	24.54	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	2.4G-2410
Power:	DC 5V
TE:	Berny
Date	2026/5/9
T/A/P	23.9°C/51%/101Kpa

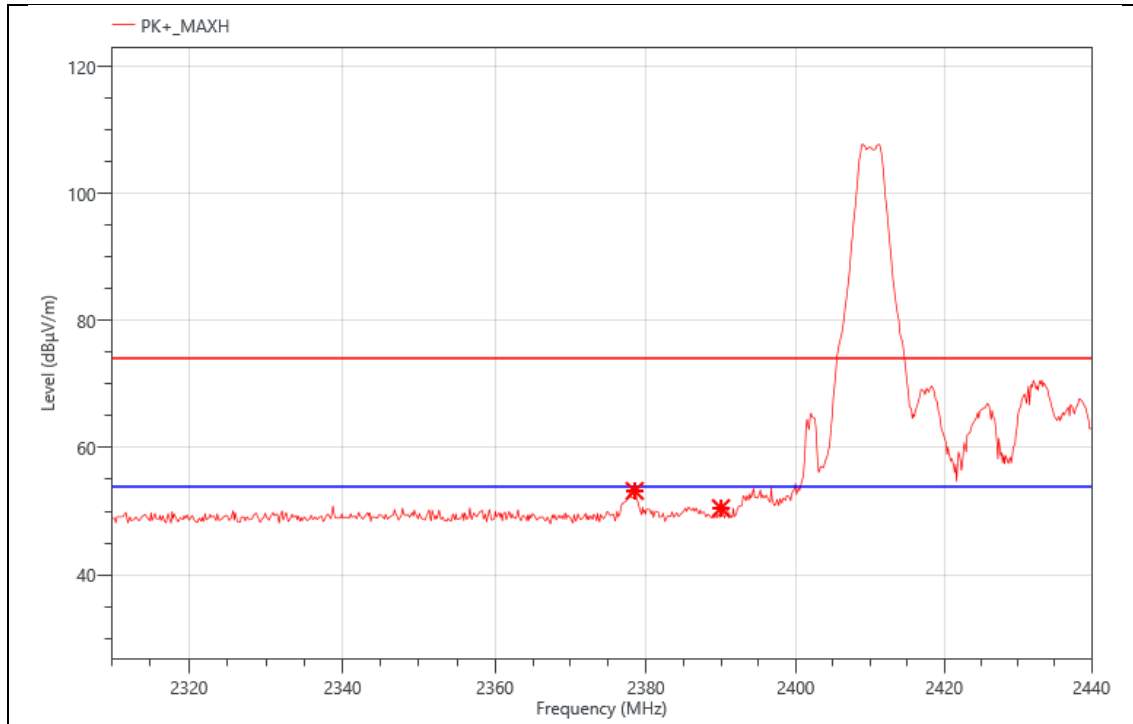


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2378.510	30.66	22.54	53.20	74.00	20.80	PK+	H
2	2390.000	27.76	22.72	50.48	74.00	23.52	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	2.4G-2473
Power:	DC 5V
TE:	Berny
Date	2026/5/9
T/A/P	23.9°C/51%/101Kpa

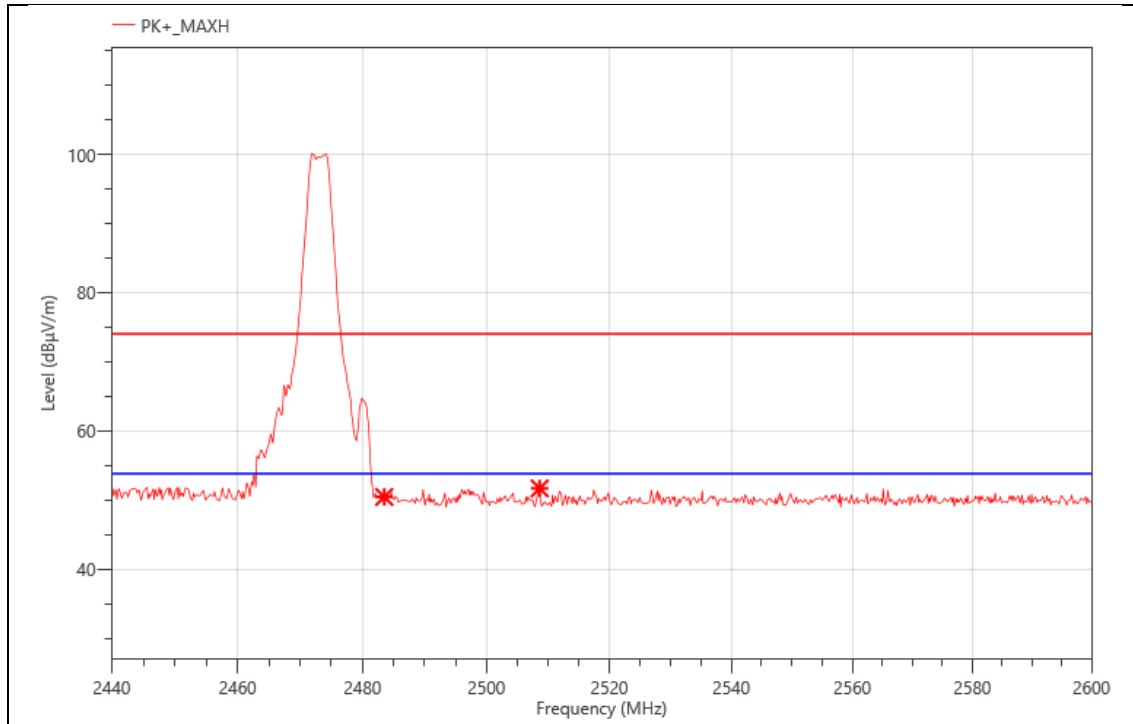


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2483.500	27.29	23.15	50.44	74.00	23.56	PK+	V
2	2508.640	28.57	23.11	51.68	74.00	22.32	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	2.4G-2473
Power:	DC 5V
TE:	Berny
Date	2026/5/9
T/A/P	23.9°C/51%/101Kpa

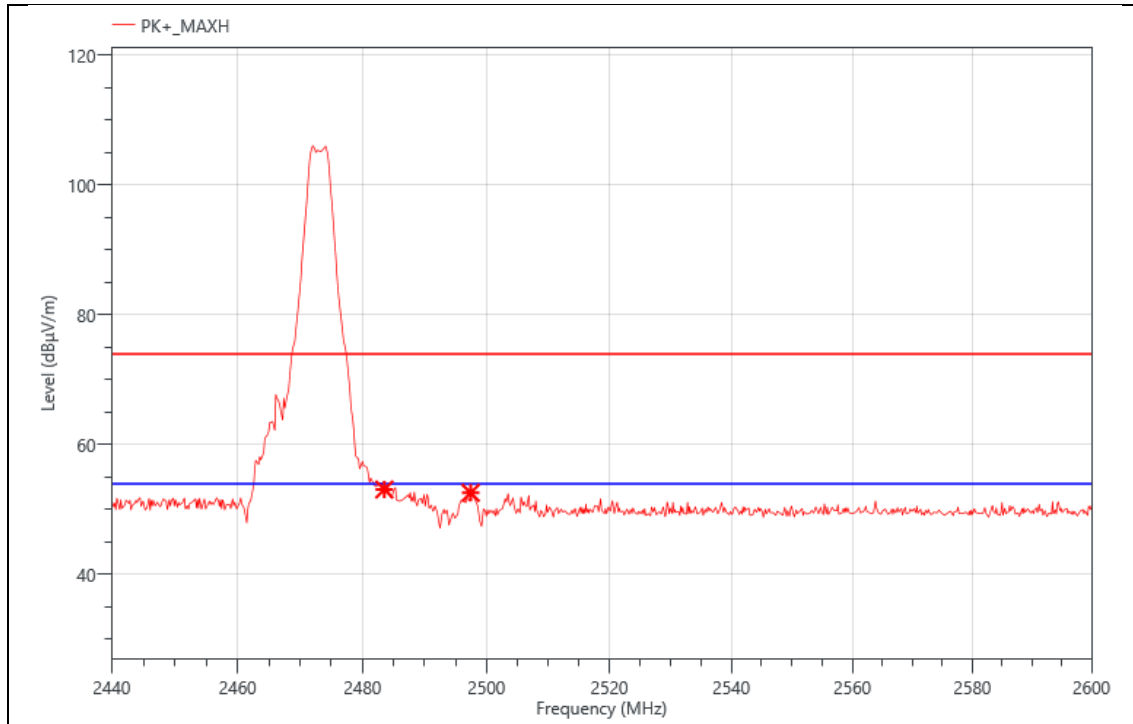

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2483.500	29.96	23.15	53.11	74.00	20.89	PK+	H
2	2497.440	29.47	23.12	52.59	74.00	21.41	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Standard	Requirement
RSS-Gen issue 5 6.8.	The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list. For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below). When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested. For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location: This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

	Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.
--	---

DESCRIPTION

Pass.

10. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

*Decreases with the logarithm of the frequency.


TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver is used to test the emissions from the AC line. According to the requirements in Section 6.2 of ANSI C63.10-2020. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.


The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

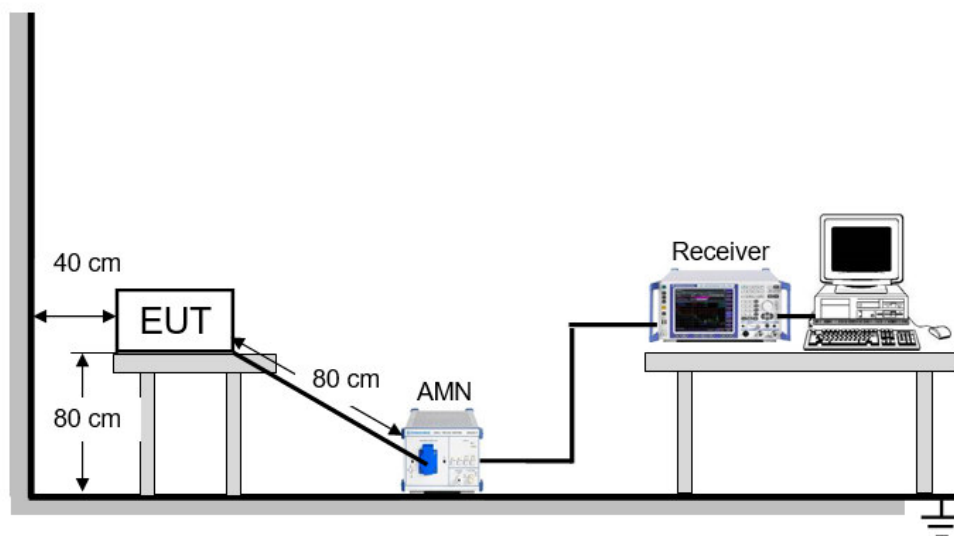

TEST ENVIRONMENT


Temperature	23.2°C	Relative Humidity	52%
Atmosphere Pressure	101kPa		

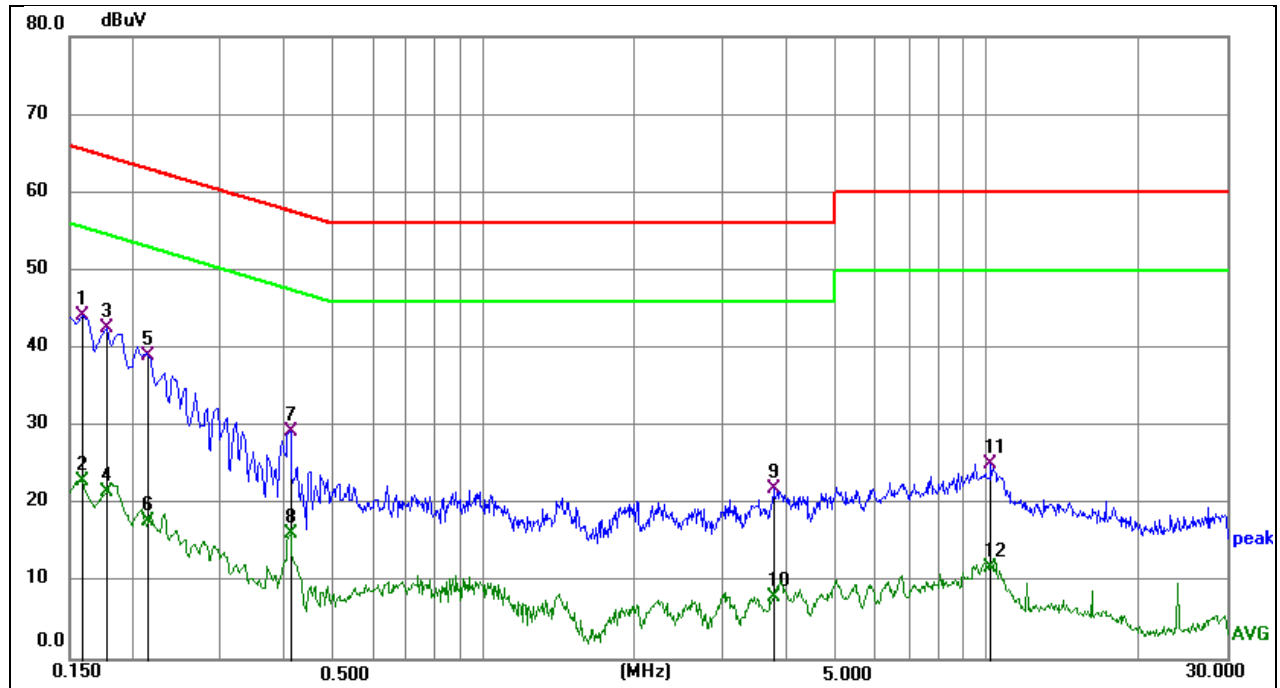TEST RESULTS

Phase: N

Mode: 2.4GHz

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1590	34.48	9.71	44.19	65.52	-21.33	QP
2	0.1590	13.31	9.71	23.02	55.52	-32.50	AVG
3	0.1770	32.85	9.69	42.54	64.63	-22.09	QP
4	0.1770	11.75	9.69	21.44	54.63	-33.19	AVG
5	0.2150	29.39	9.61	39.00	63.01	-24.01	QP
6	0.2150	8.17	9.61	17.78	53.01	-35.23	AVG
7	0.4110	19.66	9.60	29.26	57.63	-28.37	QP
8	0.4110	6.51	9.60	16.11	47.63	-31.52	AVG
9	3.7770	12.15	9.79	21.94	56.00	-34.06	QP
10	3.7770	-1.78	9.79	8.01	46.00	-37.99	AVG
11	10.1984	14.88	10.16	25.04	60.00	-34.96	QP
12	10.1984	1.65	10.16	11.81	50.00	-38.19	AVG

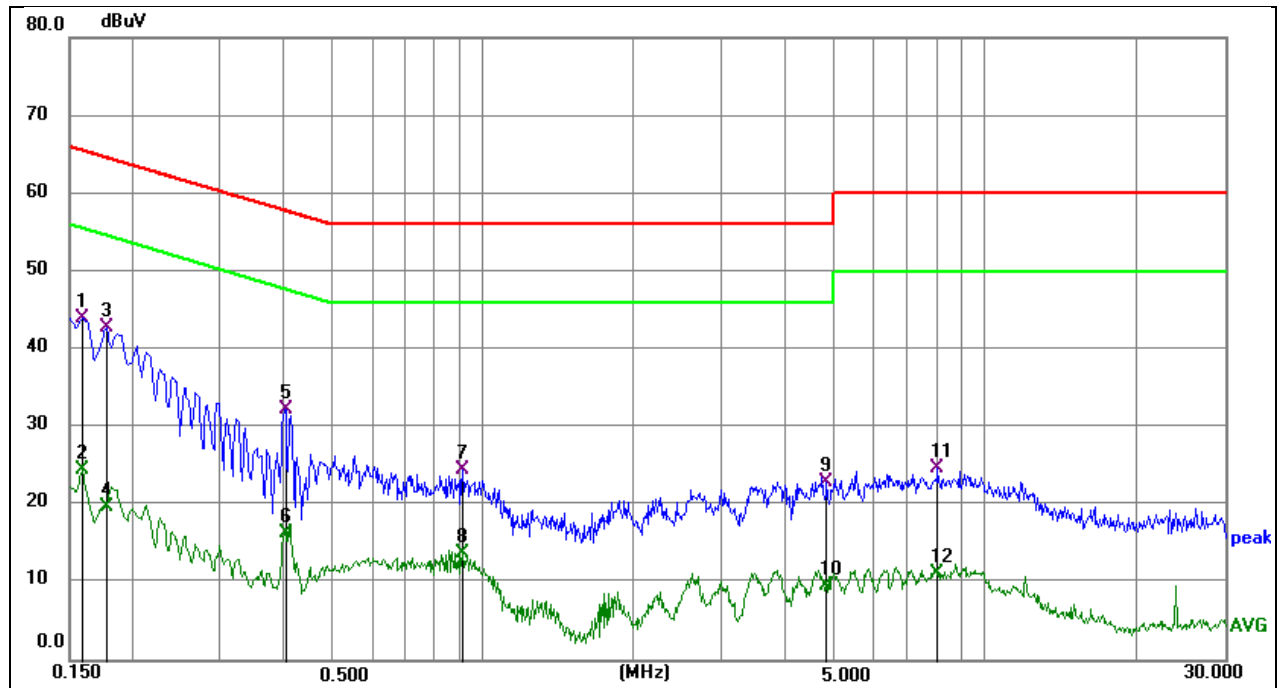

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1590	34.29	9.71	44.00	65.52	-21.52	QP
2	0.1590	14.84	9.71	24.55	55.52	-30.97	AVG
3	0.1770	33.00	9.69	42.69	64.63	-21.94	QP
4	0.1770	10.11	9.69	19.80	54.63	-34.83	AVG
5	0.4020	22.71	9.60	32.31	57.81	-25.50	QP
6	0.4020	6.72	9.60	16.32	47.81	-31.49	AVG
7	0.9105	14.95	9.64	24.59	56.00	-31.41	QP
8	0.9105	4.11	9.64	13.75	46.00	-32.25	AVG
9	4.8390	13.03	9.83	22.86	56.00	-33.14	QP
10	4.8390	-0.15	9.83	9.68	46.00	-36.32	AVG
11	8.0520	14.62	10.04	24.66	60.00	-35.34	QP
12	8.0520	1.16	10.04	11.20	50.00	-38.80	AVG

11. TEST DATA - Appendix A

Please refer to section "Test Data" - Appendix A

END OF REPORT