


Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

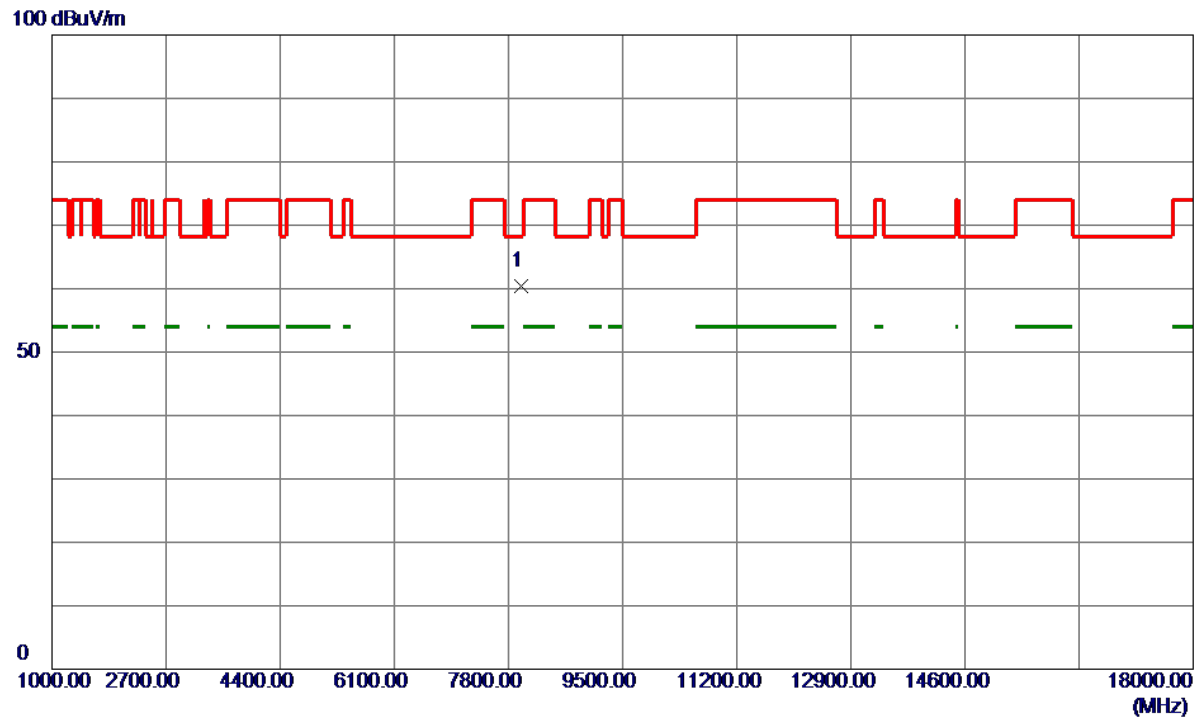


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	7984.1960	52.34	8.03	60.37	68.20	-7.83	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

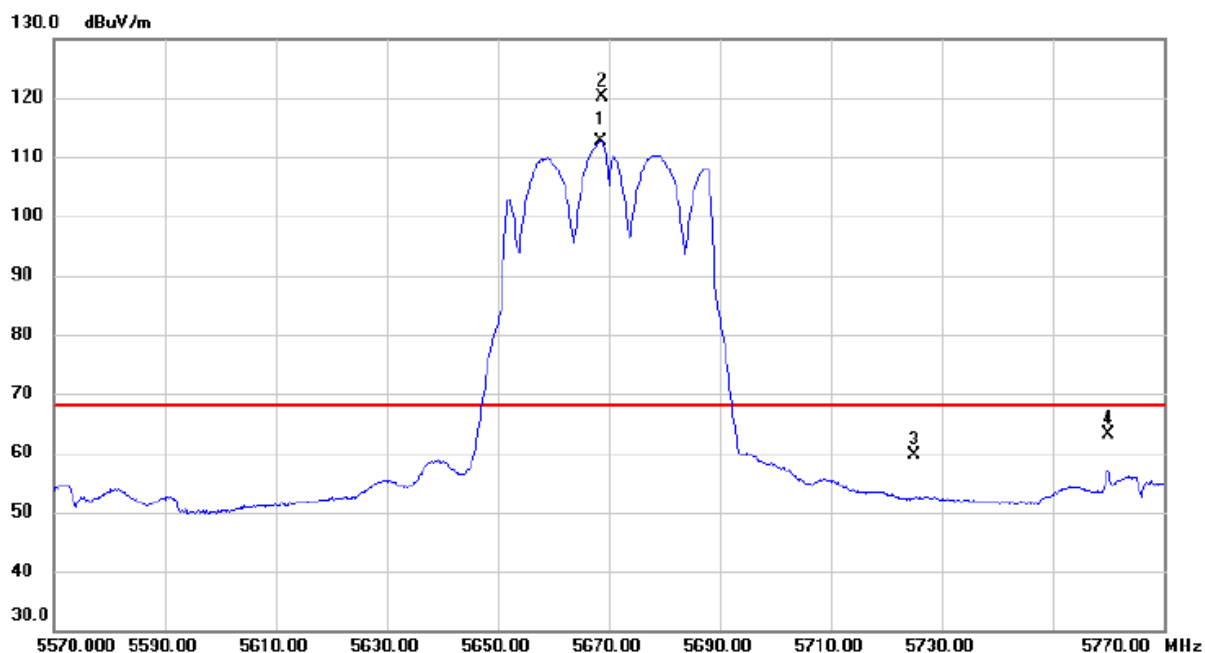


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5668.600	96.06	16.49	112.55	68.20	44.35	AVG	No Limit
2	*	5668.800	103.71	16.49	120.20	68.20	52.00	peak	No Limit
3		5725.000	42.85	16.69	59.54	68.20	-8.66	peak	
4		5760.000	46.25	16.81	63.06	68.20	-5.14	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

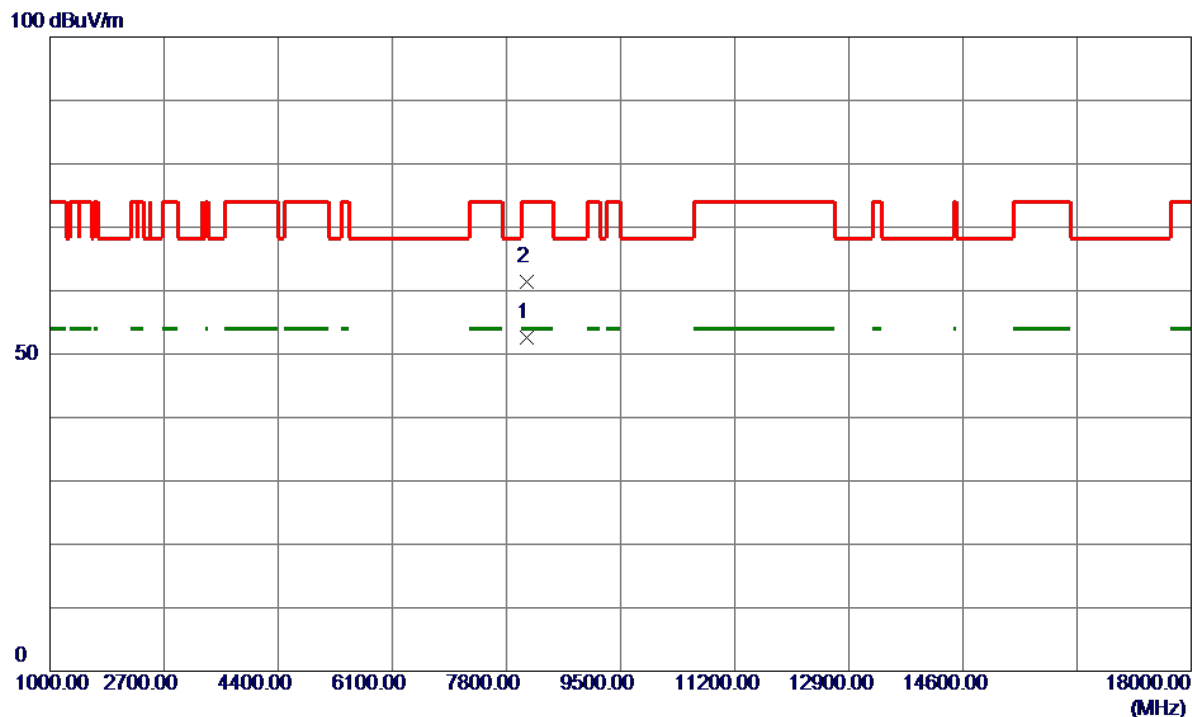


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	8104.4590	44.49	8.17	52.66	54.00	-1.34	AVG	
2	8110.5590	53.26	8.19	61.45	74.00	-12.55	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

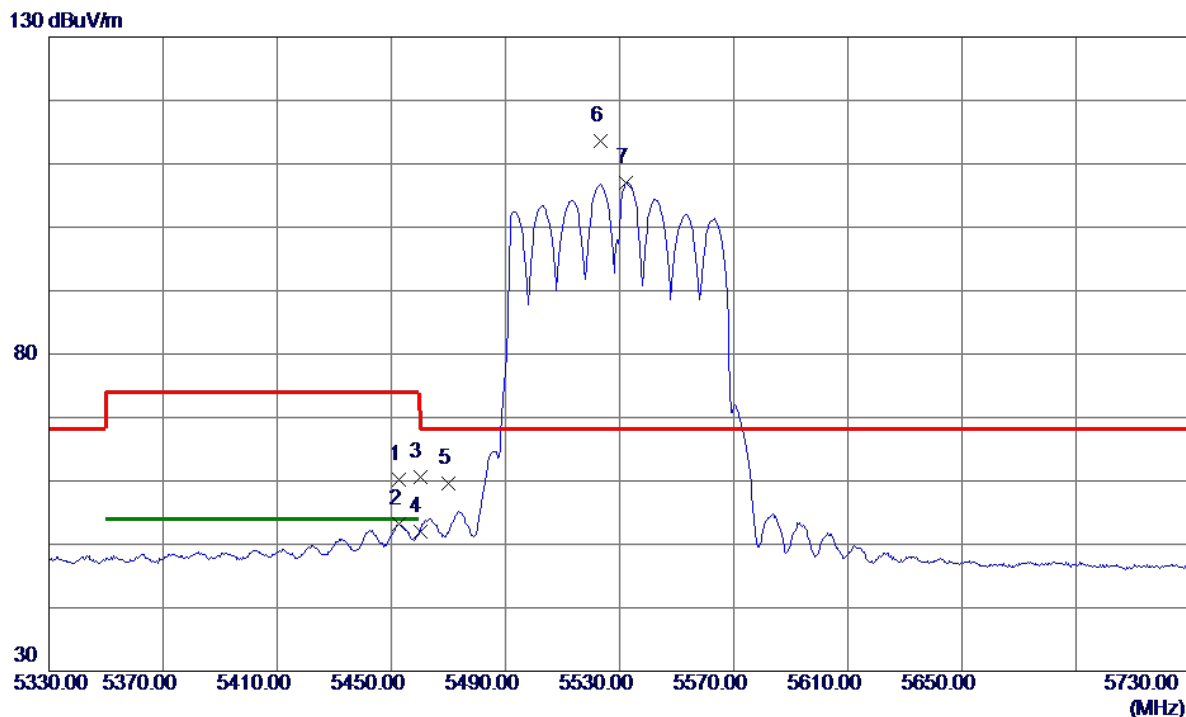


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5452.8000	44.51	15.78	60.29	74.00	-13.71	Peak	
2	5452.8000	37.41	15.78	53.19	54.00	-0.81	AVG	
3	5460.0000	44.74	15.80	60.54	74.00	-13.46	Peak	
4	5460.0000	36.11	15.80	51.91	54.00	-2.09	AVG	
5	5470.0000	43.72	15.83	59.55	68.20	-8.65	Peak	
6 *	5523.2000	97.60	15.99	113.59	68.20	45.39	Peak	No Limit
7	5532.4000	91.06	16.02	107.08	999.00	-891.92	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

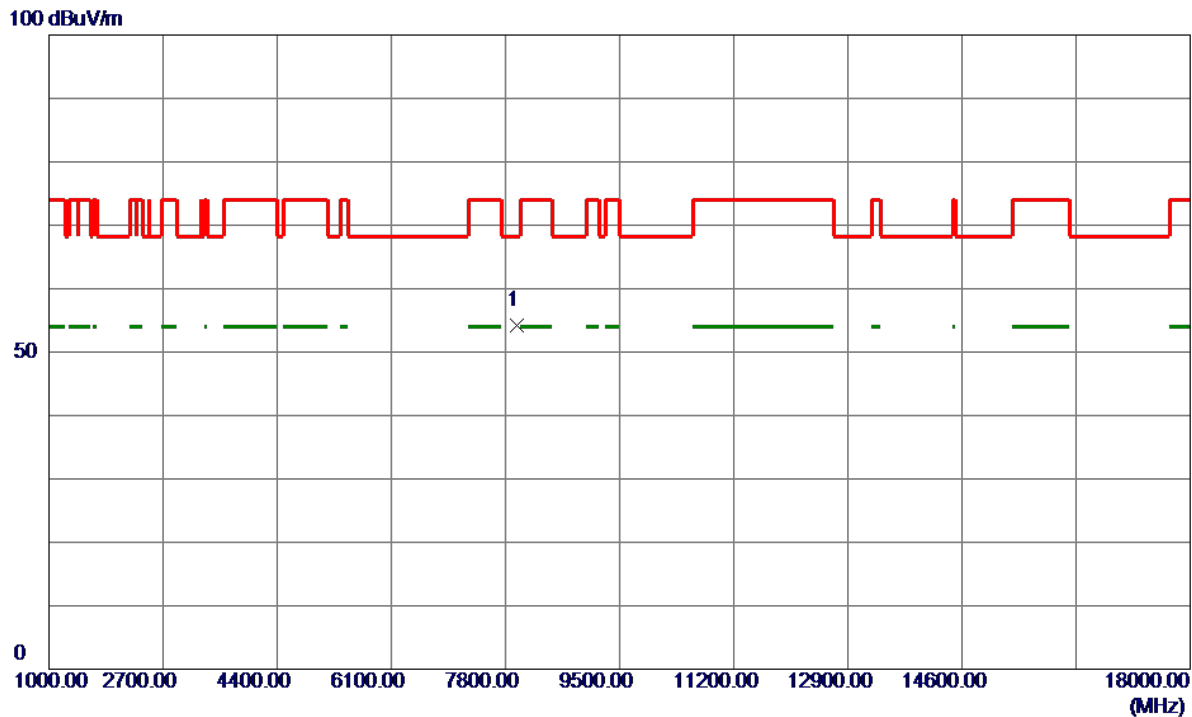


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	7963.8590	46.07	8.08	54.15	68.20	-14.05	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

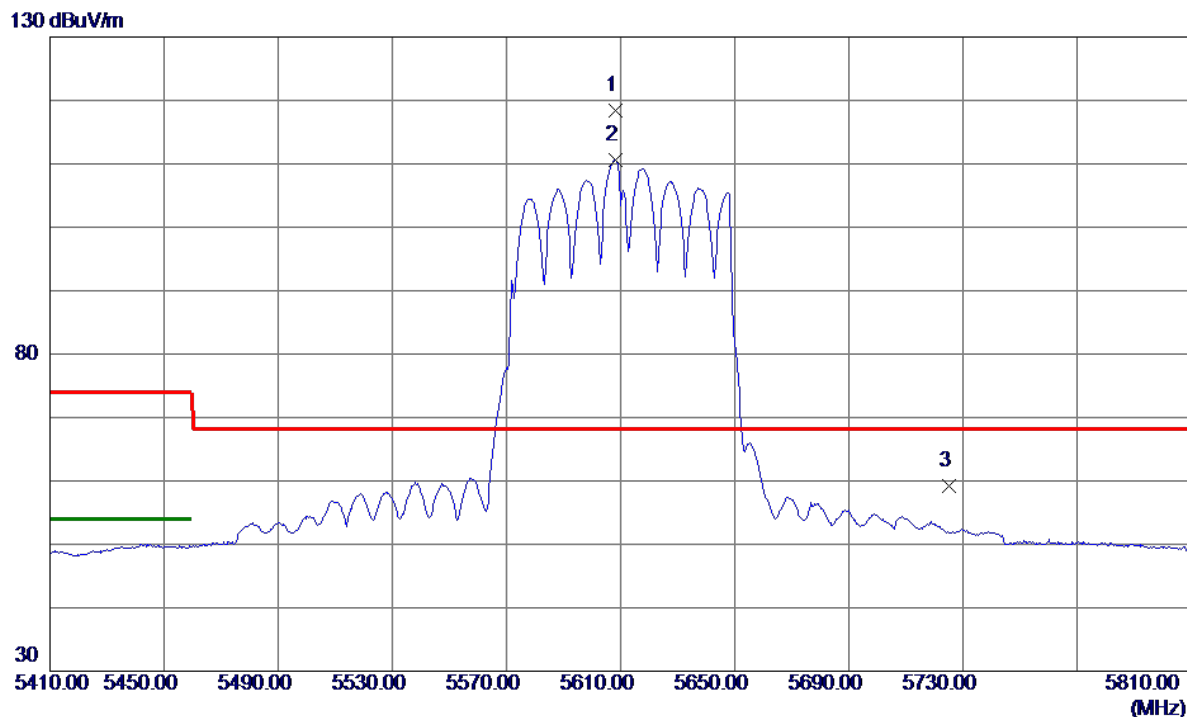


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5608.4000	102.17	16.29	118.46	68.20	50.26	Peak	No Limit
2	5608.4000	94.32	16.29	110.61	999.00	-888.39	AVG	No Limit
3	5725.0000	42.54	16.69	59.23	68.20	-8.97	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

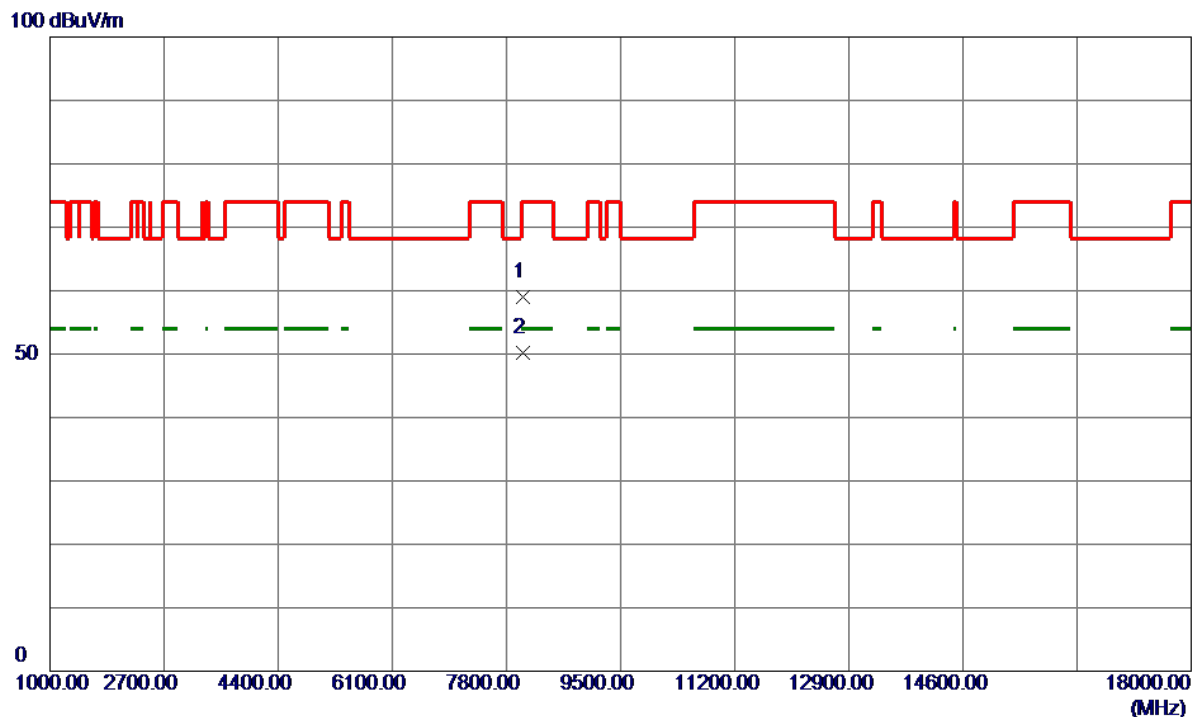


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	8050.4590	51.02	8.07	59.09	74.00	-14.91	Peak	
2 *	8053.8590	42.19	8.08	50.27	54.00	-3.73	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

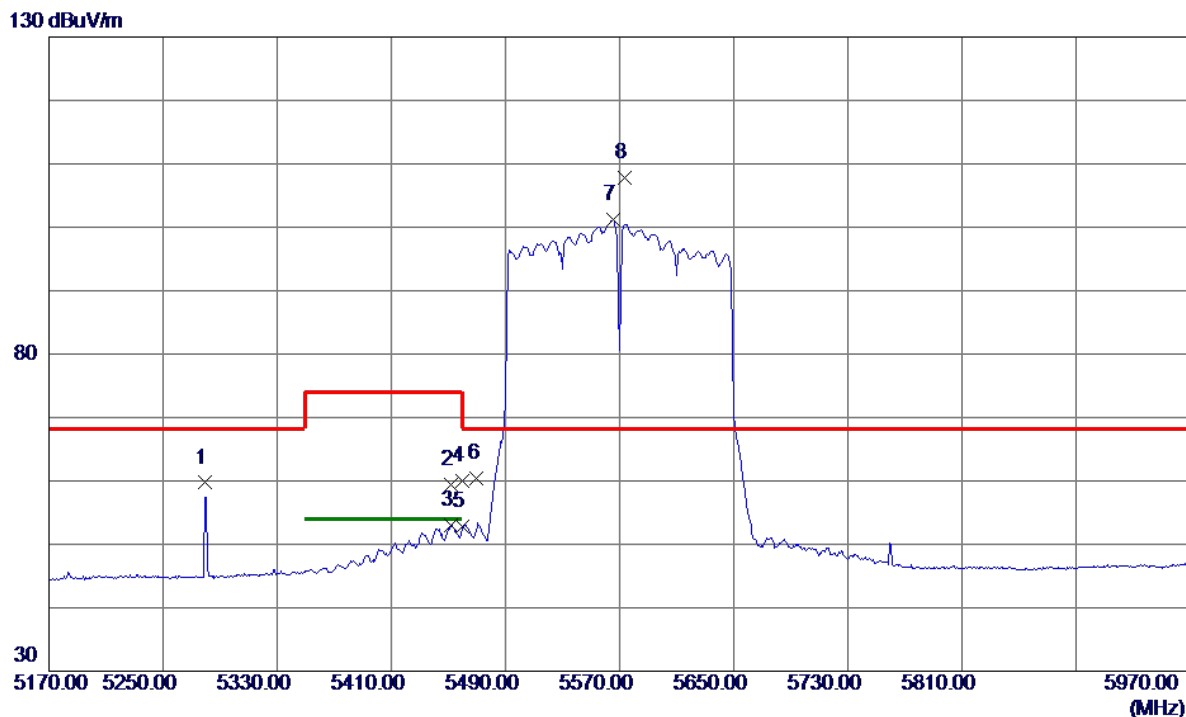


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5279.6000	44.38	15.32	59.70	68.20	-8.50	Peak	
2	5451.6000	43.62	15.78	59.40	74.00	-14.60	Peak	
3	5451.6000	37.25	15.78	53.03	54.00	-0.97	AVG	
4	5460.0000	44.26	15.80	60.06	74.00	-13.94	Peak	
5	5460.0000	36.97	15.80	52.77	54.00	-1.23	AVG	
6	5470.0000	44.66	15.83	60.49	68.20	-7.71	Peak	
7	5565.2000	85.06	16.13	101.19	999.00	-897.81	AVG	No Limit
8 *	5573.2000	91.70	16.16	107.86	68.20	39.66	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

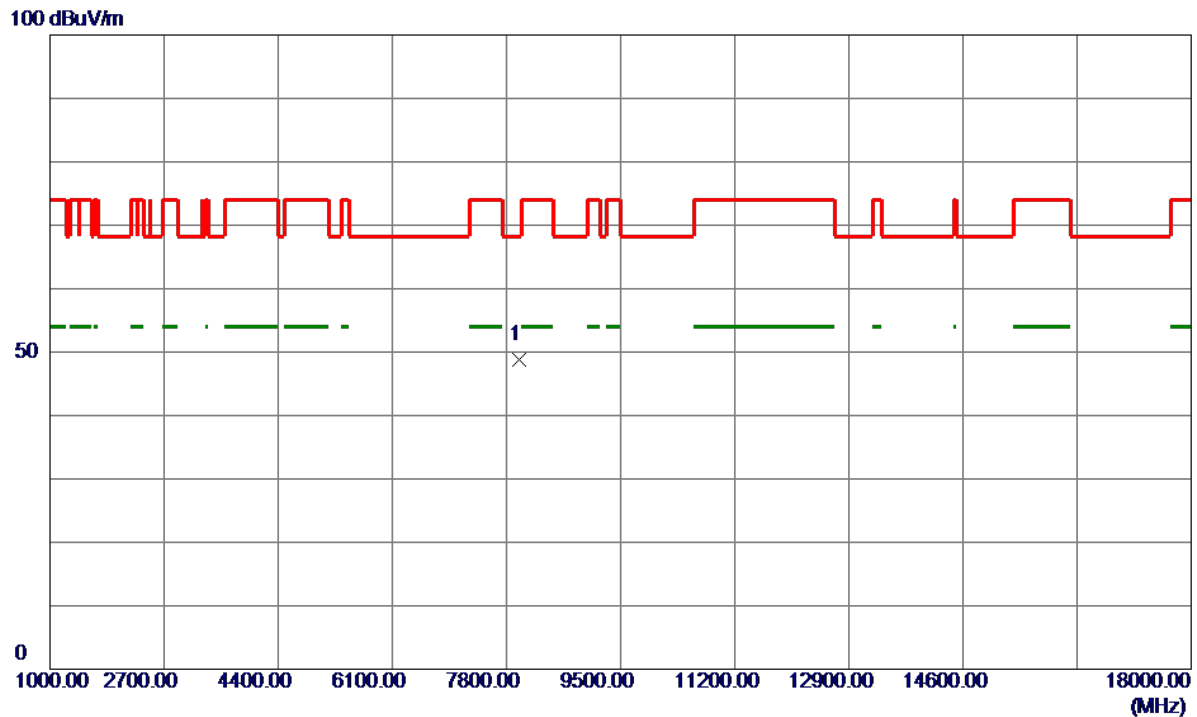


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	7994.0590	40.88	8.00	48.88	68.20	-19.32	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

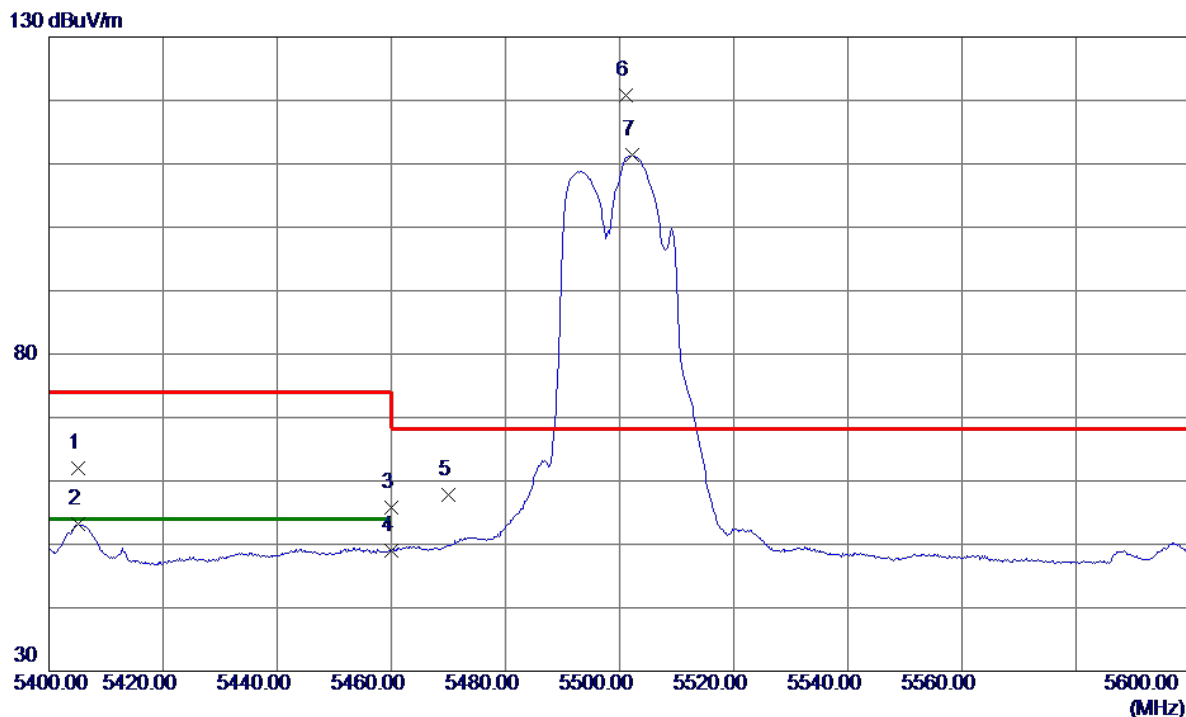


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5405.2000	46.32	15.65	61.97	74.00	-12.03	Peak	
2	5405.2000	37.61	15.65	53.26	54.00	-0.74	AVG	
3	5460.0000	40.07	15.80	55.87	74.00	-18.13	Peak	
4	5460.0000	33.12	15.80	48.92	54.00	-5.08	AVG	
5	5470.0000	41.98	15.83	57.81	68.20	-10.39	Peak	
6 *	5501.2000	104.93	15.91	120.84	68.20	52.64	Peak	No Limit
7	5502.2000	95.42	15.91	111.33	999.00	-887.67	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

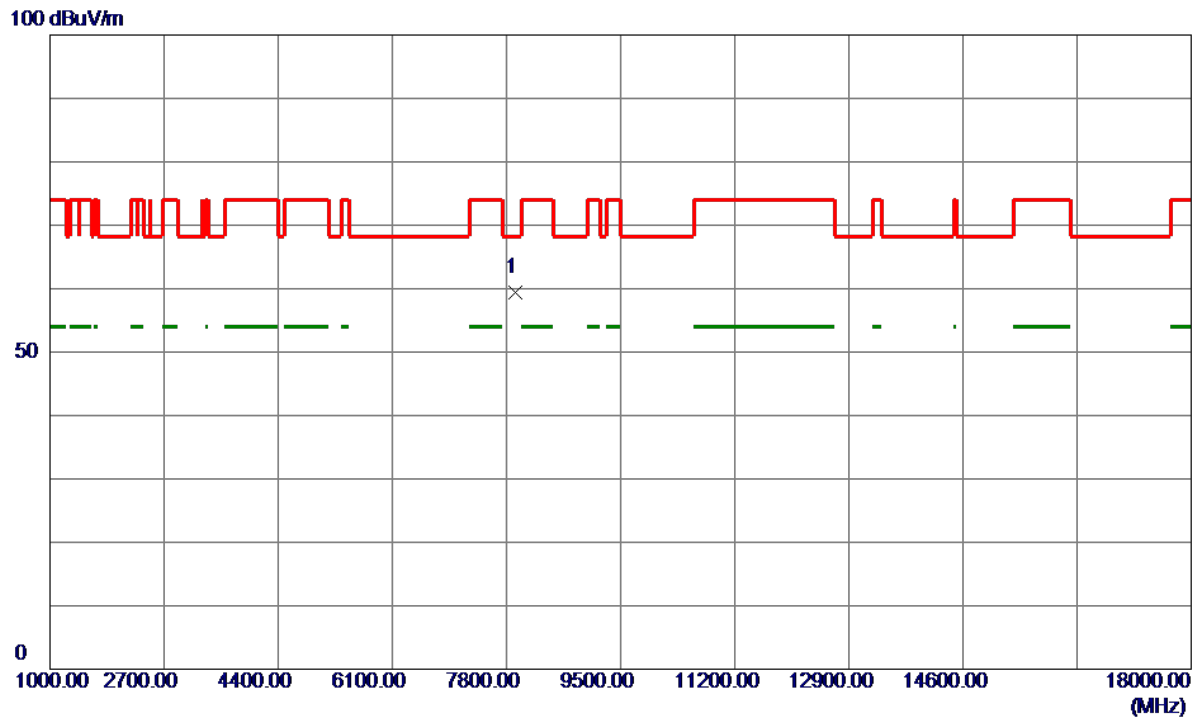


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	7934.9010	51.24	8.17	59.41	68.20	-8.79	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

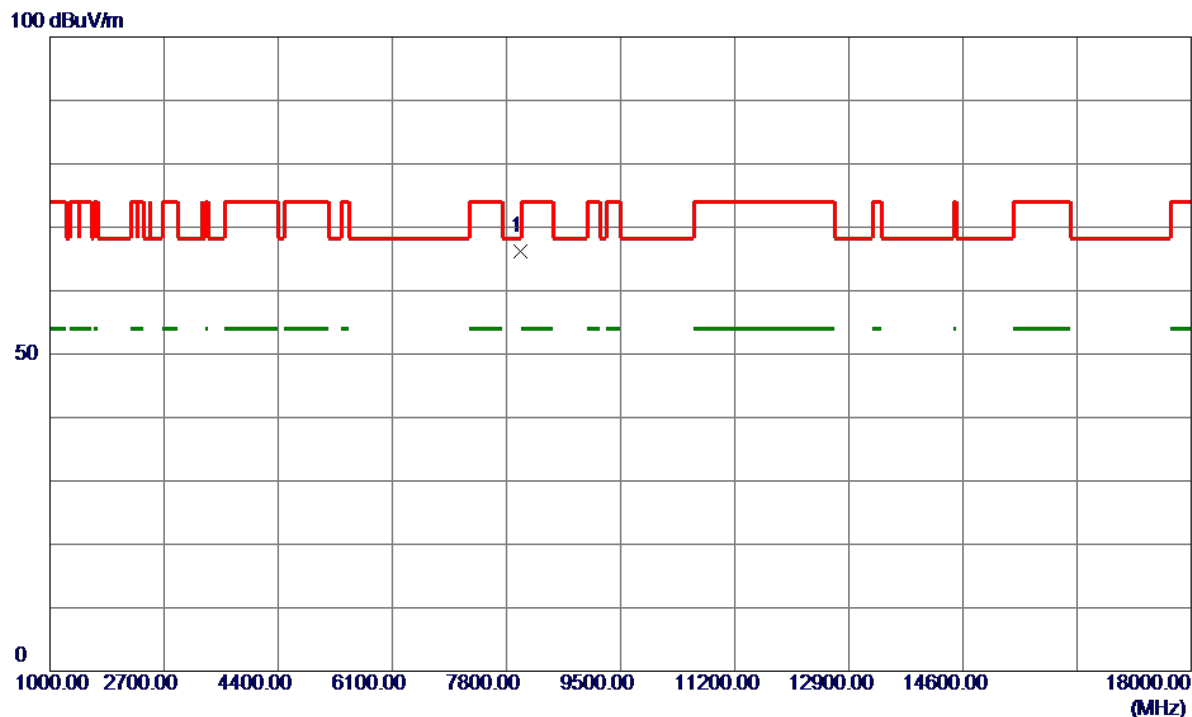


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	8013.7510	58.10	8.01	66.11	68.20	-2.09	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

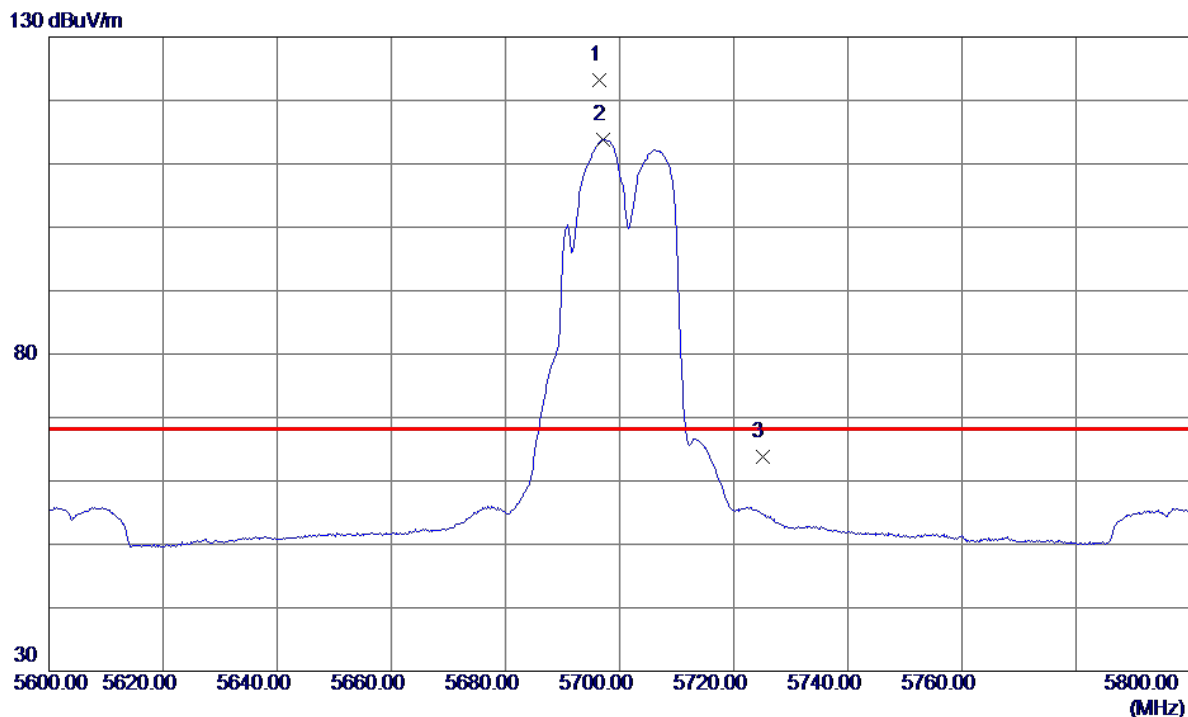


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5696.4000	106.70	16.59	123.29	68.20	55.09	Peak	No Limit
2	5697.2000	97.20	16.60	113.80	999.00	-885.20	AVG	No Limit
3	5725.0000	47.08	16.69	63.77	68.20	-4.43	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

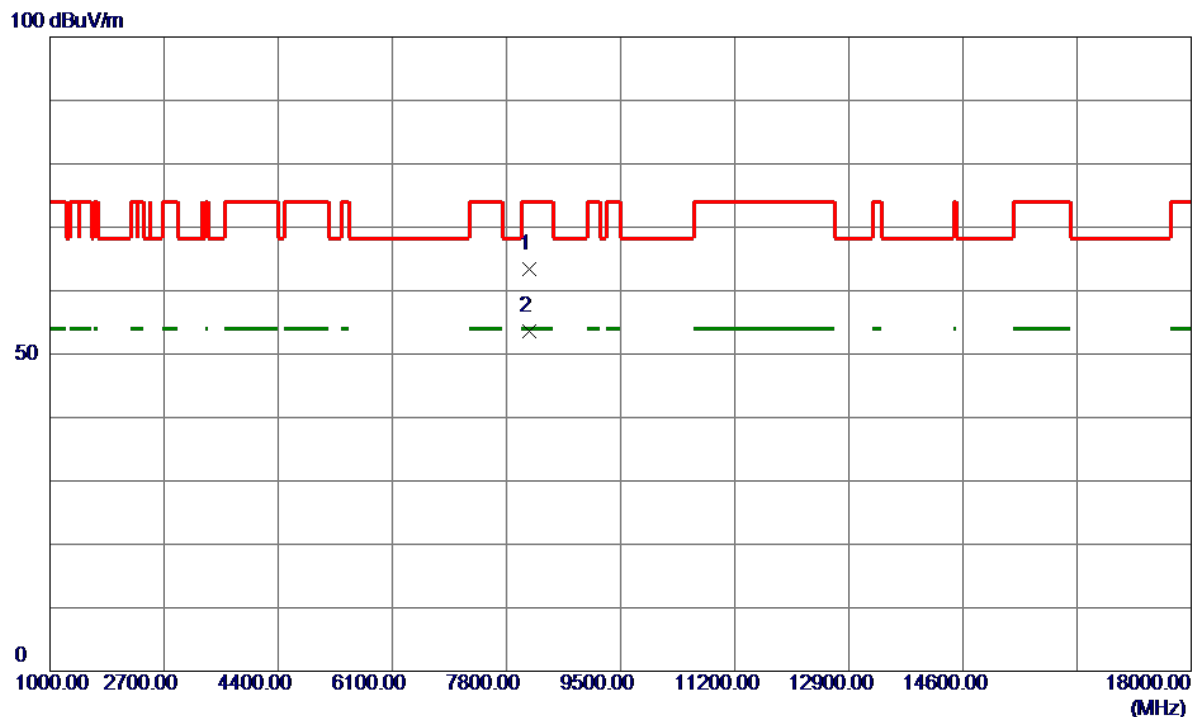


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	8134.0510	55.25	8.23	63.48	74.00	-10.52	Peak	
2 *	8135.4010	45.38	8.23	53.61	54.00	-0.39	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

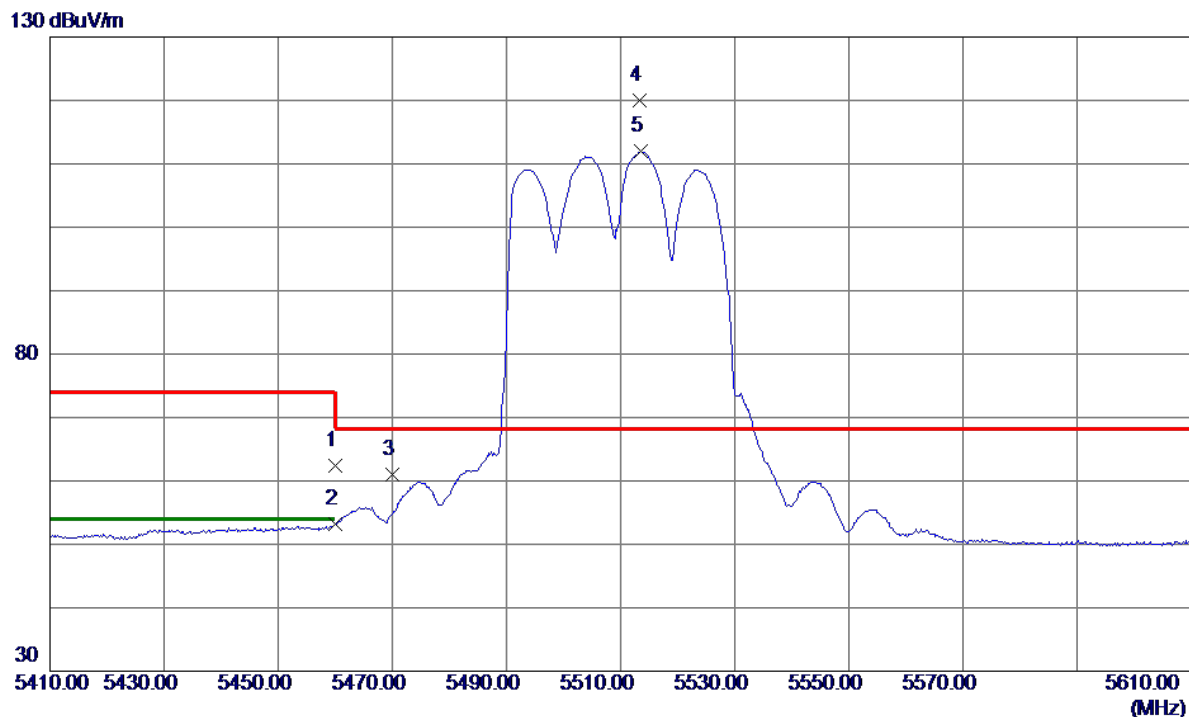


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	46.68	15.80	62.48	74.00	-11.52	Peak	
2	5460.0000	37.38	15.80	53.18	54.00	-0.82	AVG	
3	5470.0000	45.15	15.83	60.98	68.20	-7.22	Peak	
4 *	5513.4000	104.10	15.95	120.05	68.20	51.85	Peak	No Limit
5	5513.6000	95.96	15.95	111.91	999.00	-887.09	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

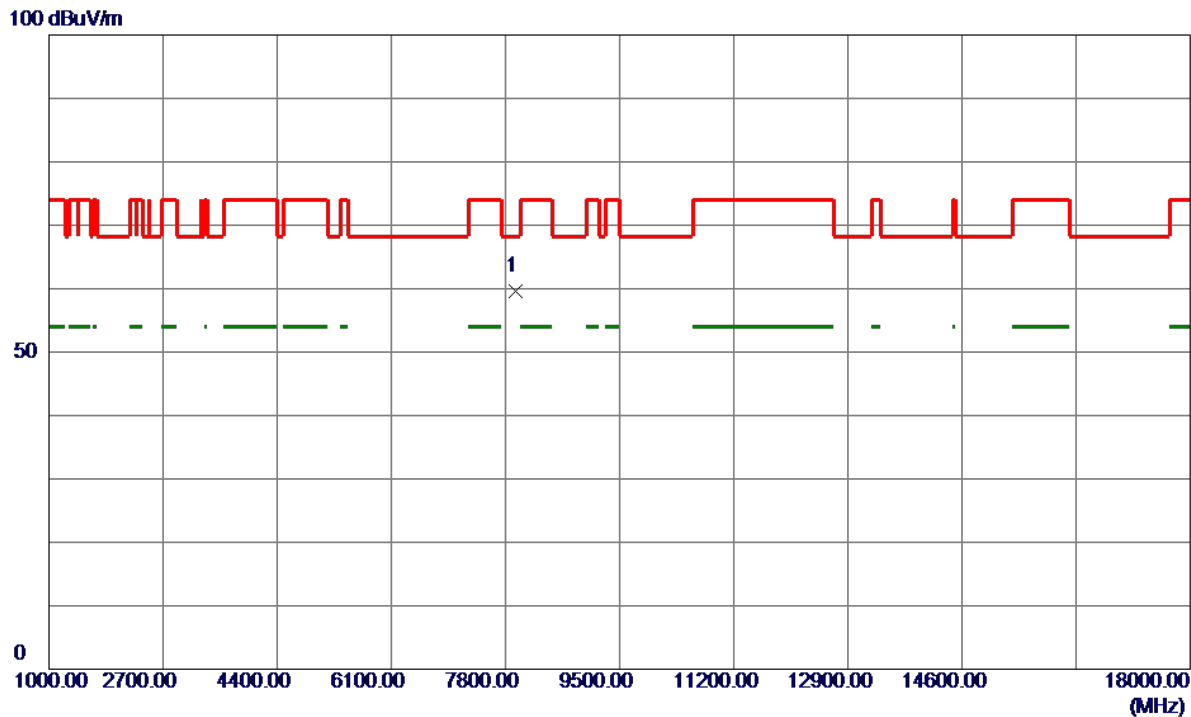


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	7945.4590	51.52	8.14	59.66	68.20	-8.54	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

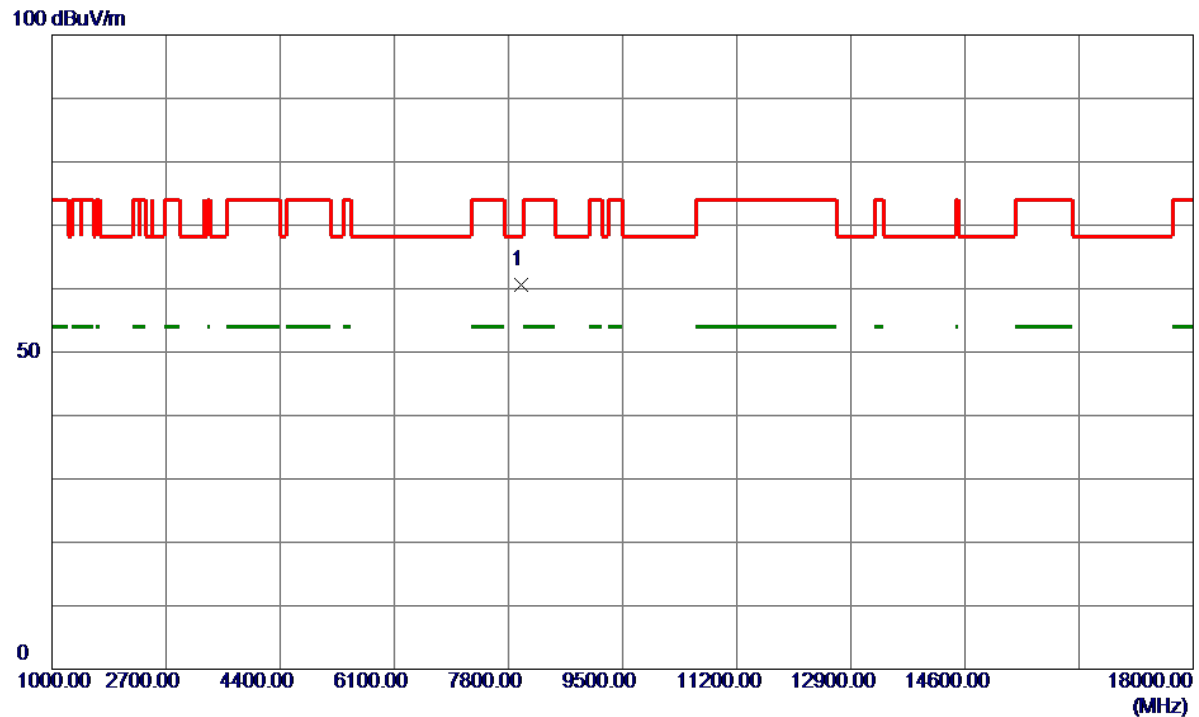


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	7984.5590	52.59	8.02	60.61	68.20	-7.59	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

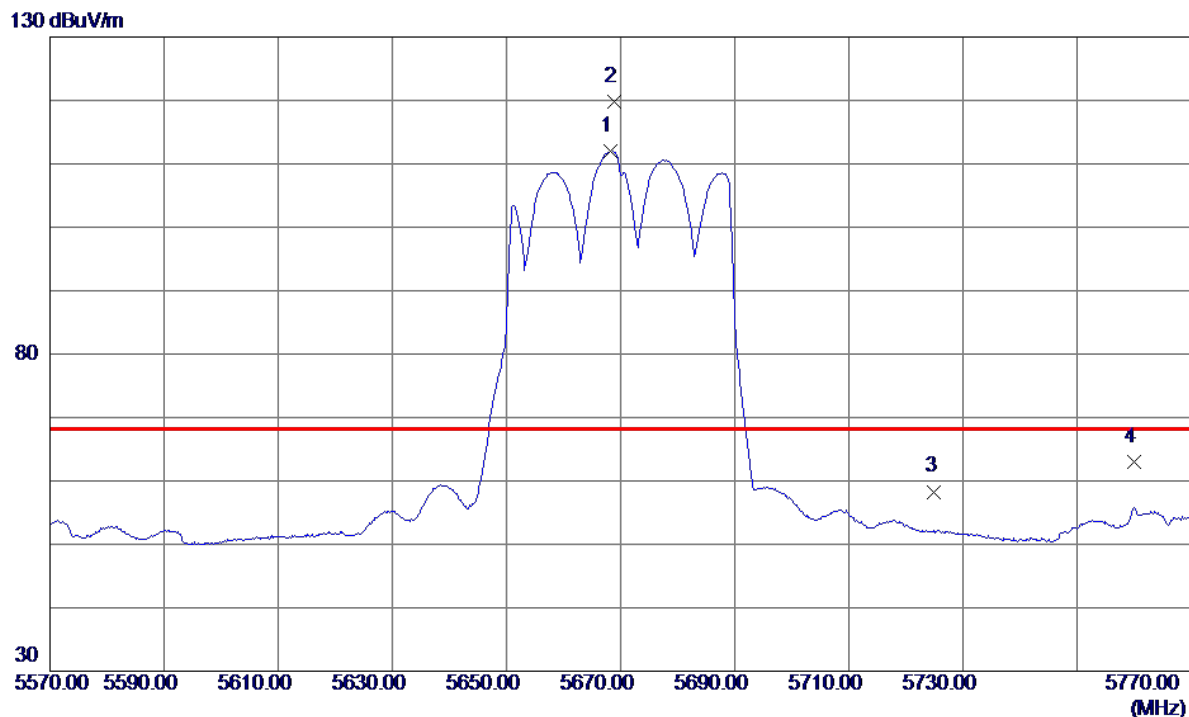


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5668.2000	95.41	16.50	111.91	999.00	-887.09	AVG	No Limit
2 *	5668.8000	103.26	16.50	119.76	68.20	51.56	Peak	No Limit
3	5725.0000	41.61	16.69	58.30	68.20	-9.90	Peak	
4	5760.0000	46.12	16.82	62.94	68.20	-5.26	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

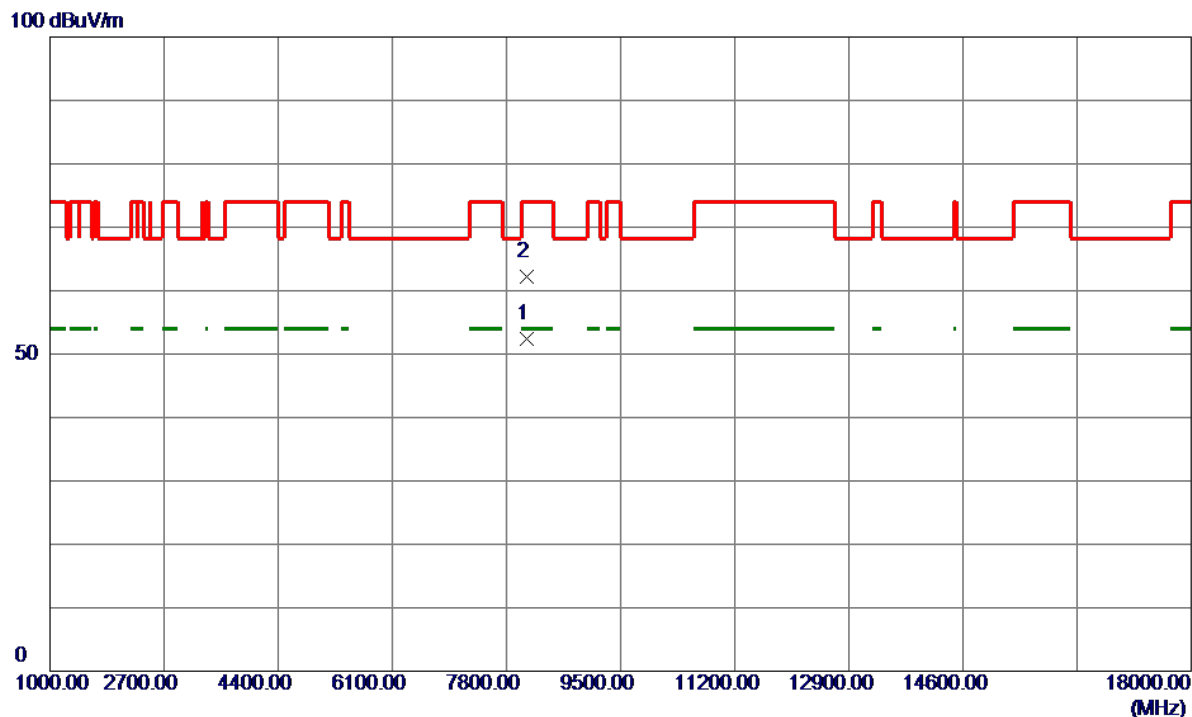


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	8108.8590	44.14	8.18	52.32	54.00	-1.68	AVG	
2	8110.8590	54.10	8.19	62.29	74.00	-11.71	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

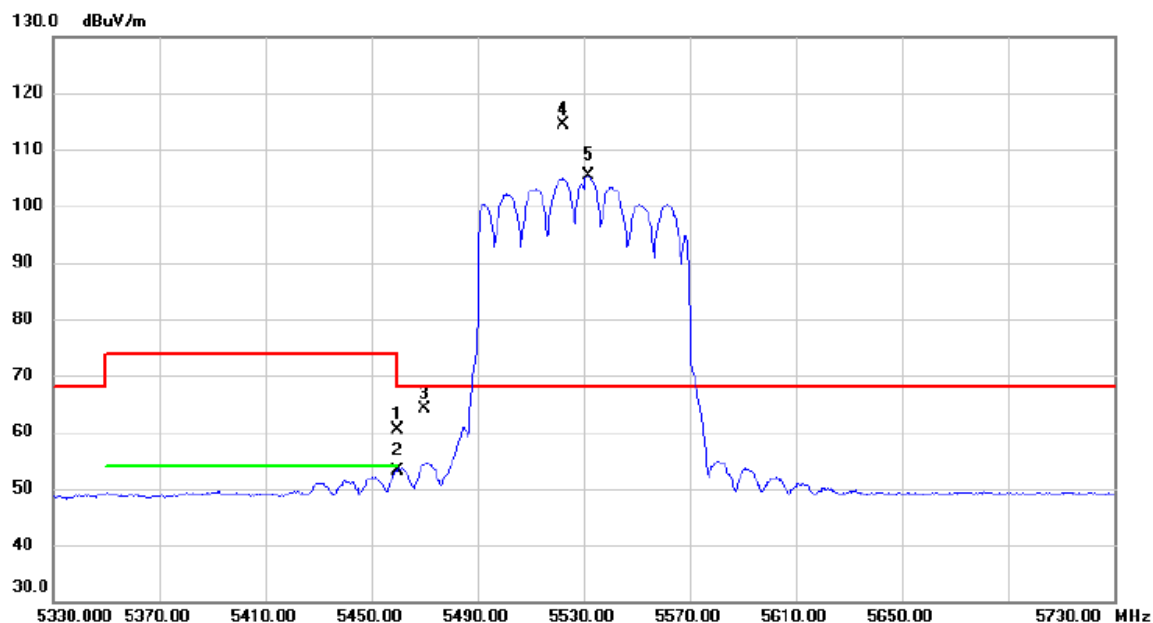


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	44.49	15.79	60.28	74.00	-13.72	peak	
2		5460.000	37.43	15.79	53.22	54.00	-0.78	AVG	
3		5470.000	48.23	15.83	64.06	68.20	-4.14	peak	
4	*	5522.000	98.29	15.98	114.27	68.20	46.07	peak	No Limit
5	X	5531.600	89.48	16.02	105.50	68.20	37.30	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

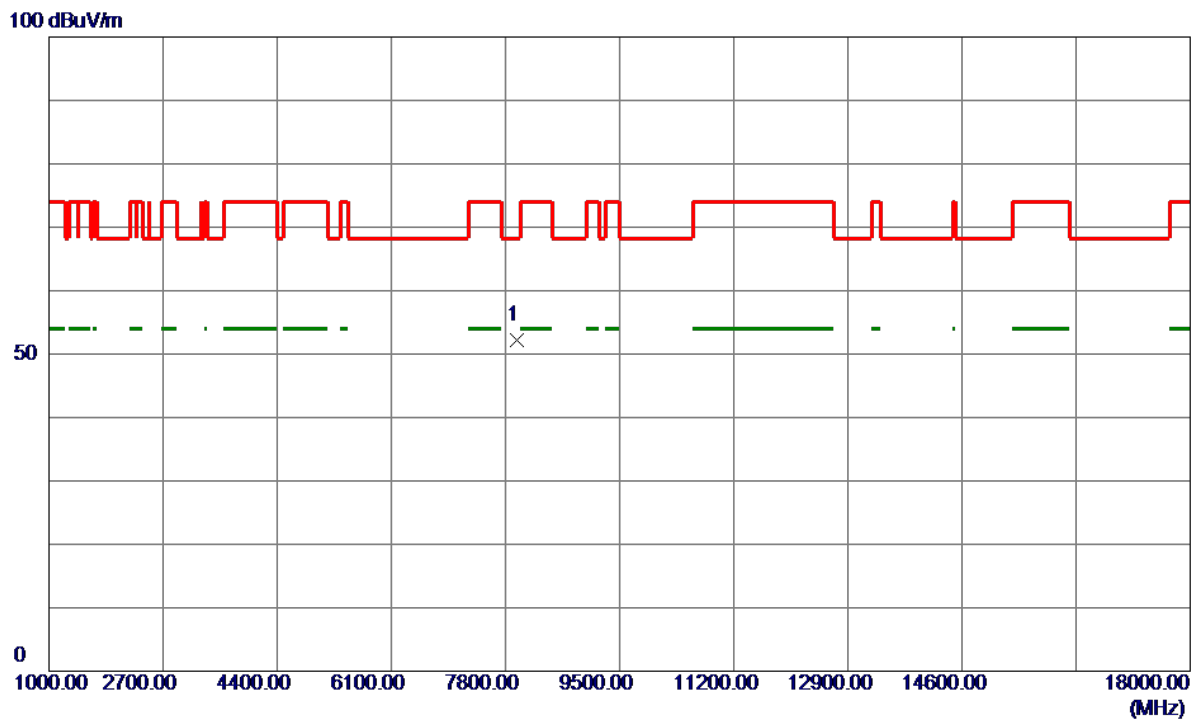


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	7963.6590	44.11	8.08	52.19	68.20	-16.01	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

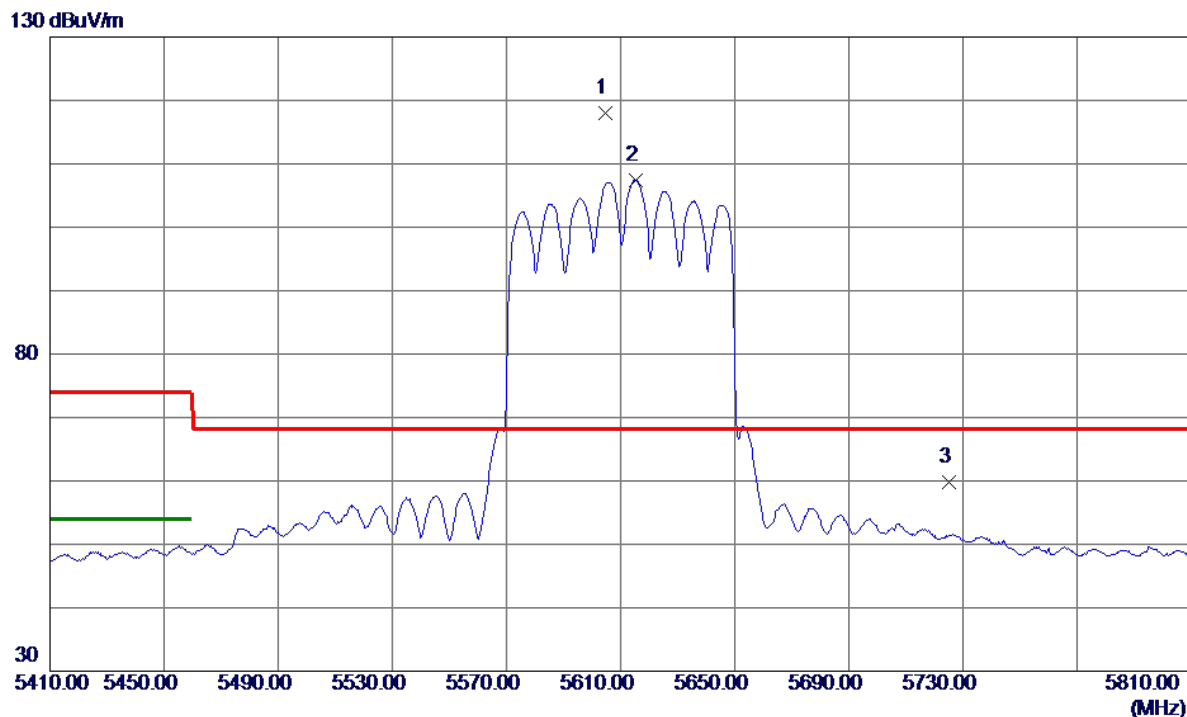


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5604.8000	101.70	16.27	117.97	68.20	49.77	Peak	No Limit
2	5615.2000	91.18	16.31	107.49	999.00	-891.51	AVG	No Limit
3	5725.0000	43.17	16.69	59.86	68.20	-8.34	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

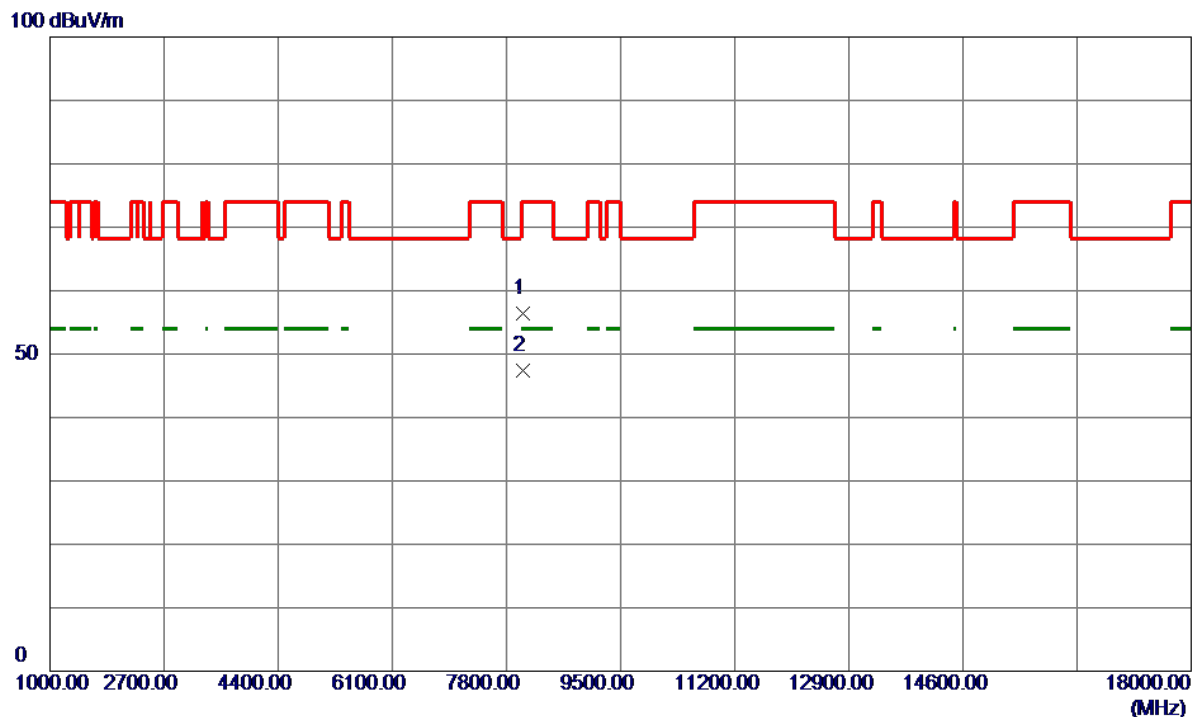


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	8043.2590	48.41	8.06	56.47	74.00	-17.53	Peak	
2 *	8053.2590	39.33	8.08	47.41	54.00	-6.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE160) Mode 5570 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

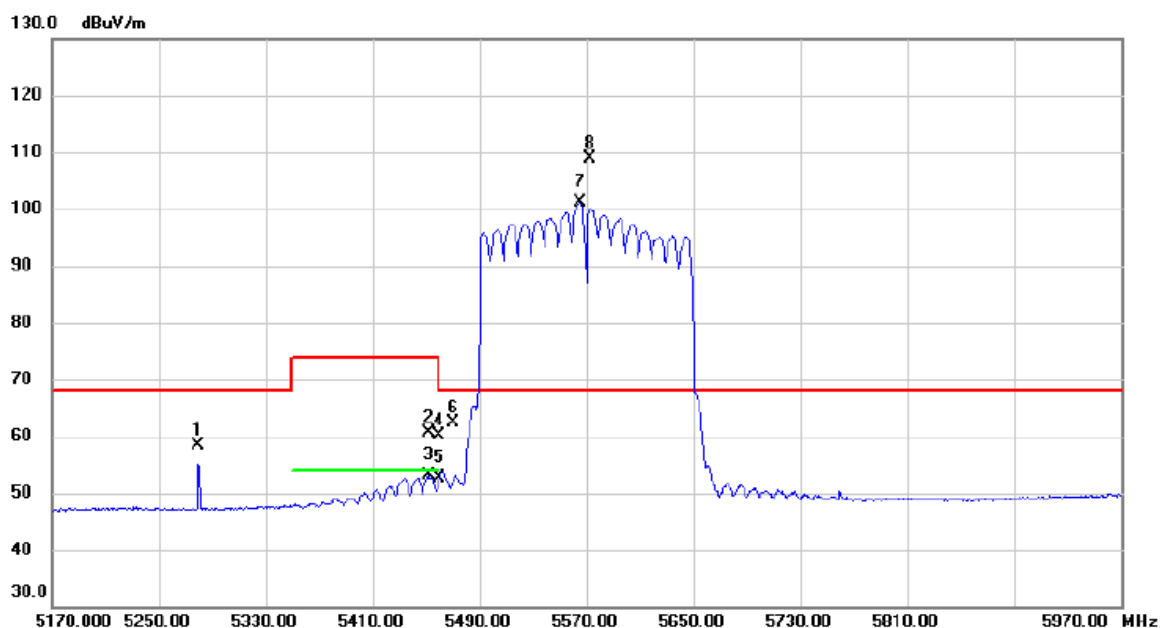


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5279.600	43.15	15.32	58.47	68.20	-9.73	peak	
2		5451.600	44.74	15.77	60.51	74.00	-13.49	peak	
3		5451.600	37.44	15.77	53.21	54.00	-0.79	AVG	
4		5460.000	44.23	15.79	60.02	74.00	-13.98	peak	
5		5460.000	36.95	15.79	52.74	54.00	-1.26	AVG	
6		5470.000	46.56	15.83	62.39	68.20	-5.81	peak	
7	X	5565.200	84.90	16.13	101.03	68.20	32.83	AVG	No Limit
8	*	5573.200	92.80	16.17	108.97	68.20	40.77	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE160) Mode 5570 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

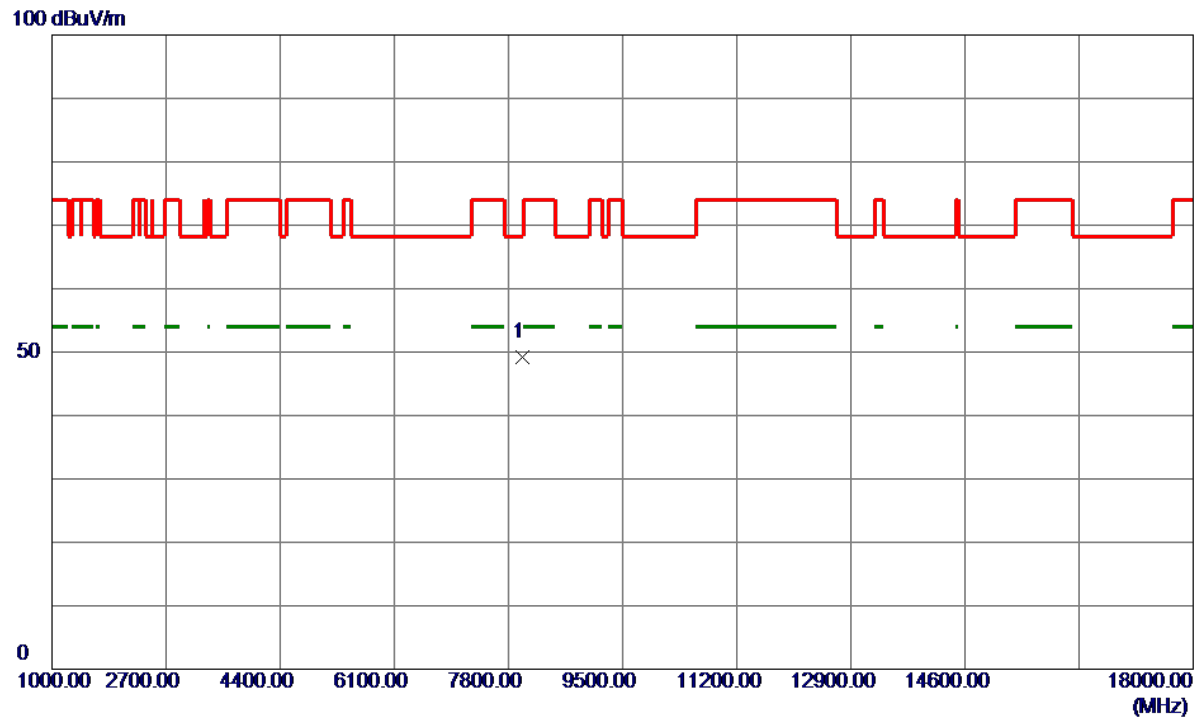


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	8002.8590	41.19	7.99	49.18	68.20	-19.02	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

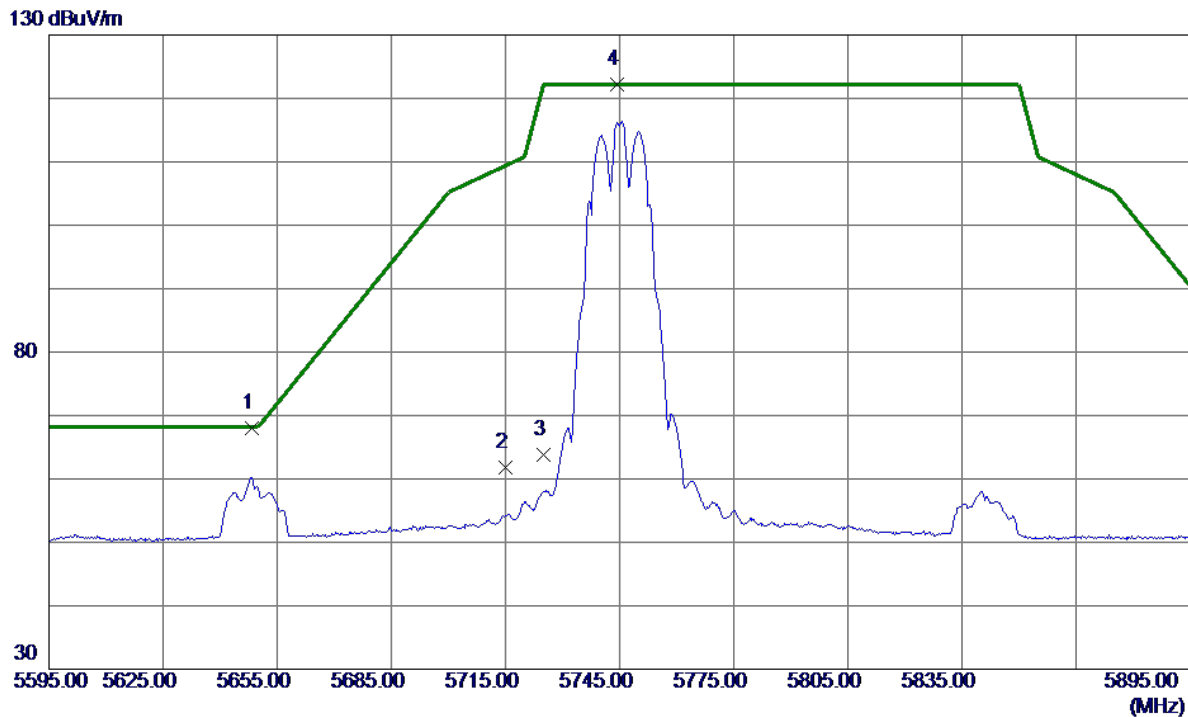


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5648.4000	51.56	16.43	67.99	68.20	-0.21	Peak	
2	5715.0000	45.11	16.66	61.77	109.40	-47.63	Peak	
3	5725.0000	47.10	16.69	63.79	122.20	-58.41	Peak	
4 *	5744.4000	105.54	16.76	122.30	122.20	0.10	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

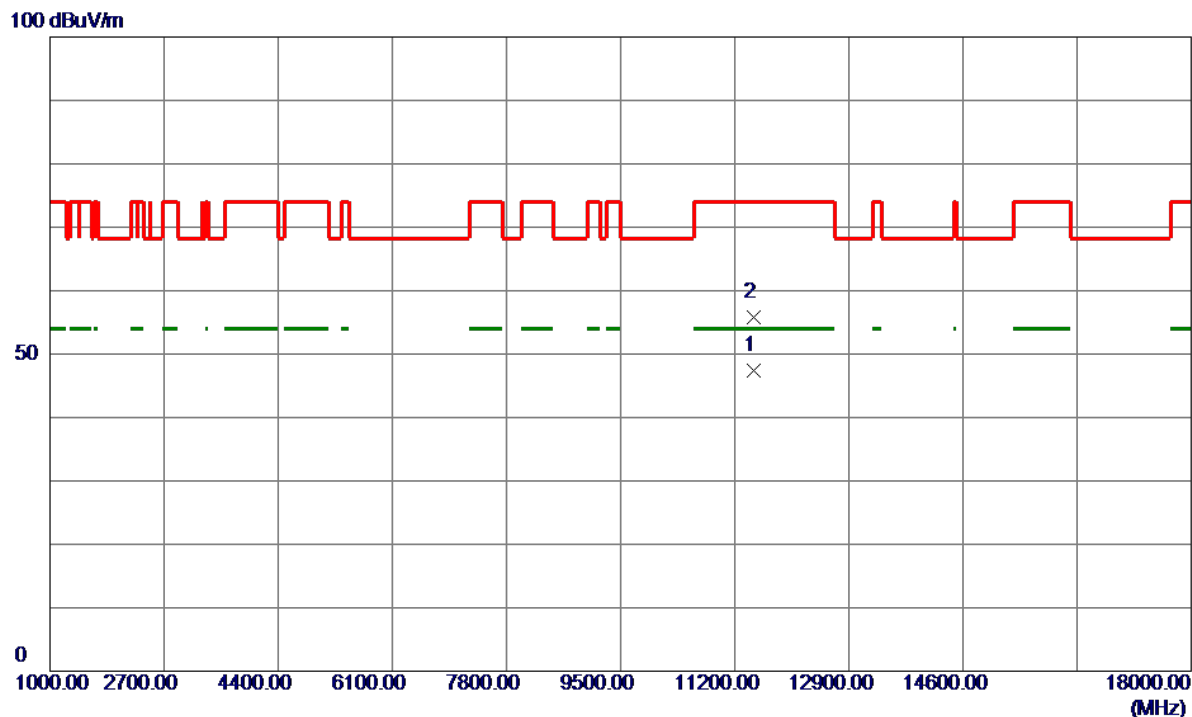


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11490.6000	38.25	9.08	47.33	54.00	-6.67	AVG	
2	11490.9000	46.79	9.08	55.87	74.00	-18.13	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

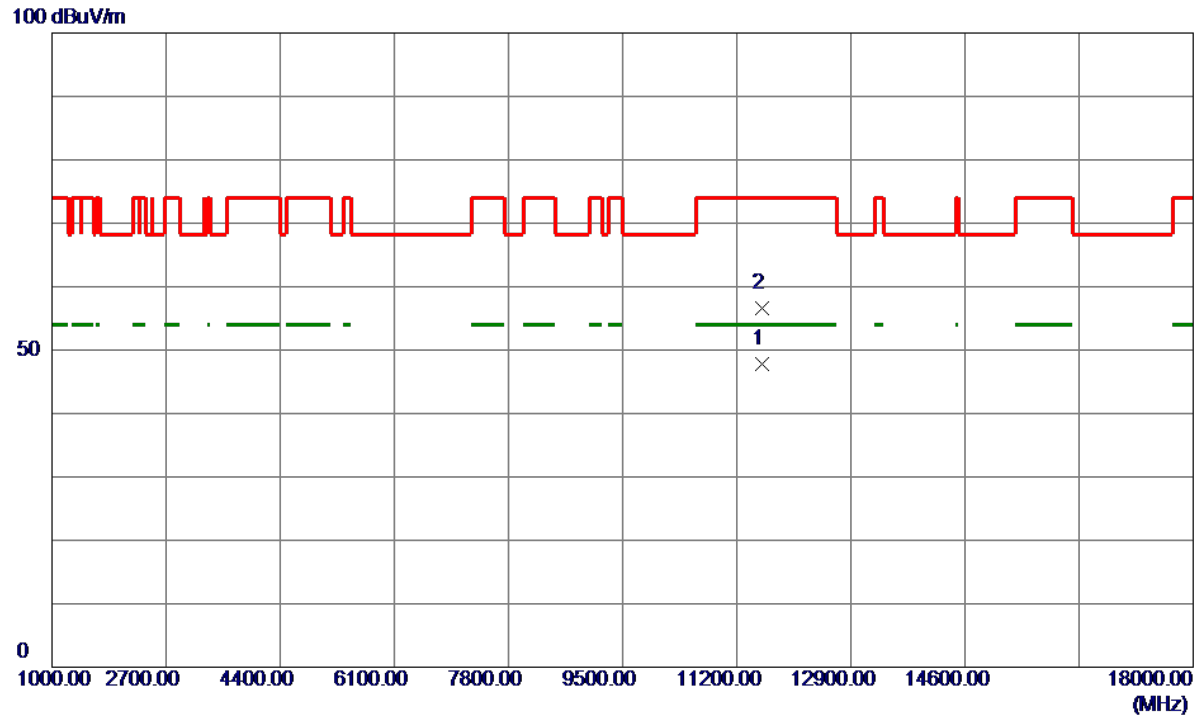


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.5000	38.54	9.21	47.75	54.00	-6.25	AVG	
2	11576.0000	47.40	9.22	56.62	74.00	-17.38	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

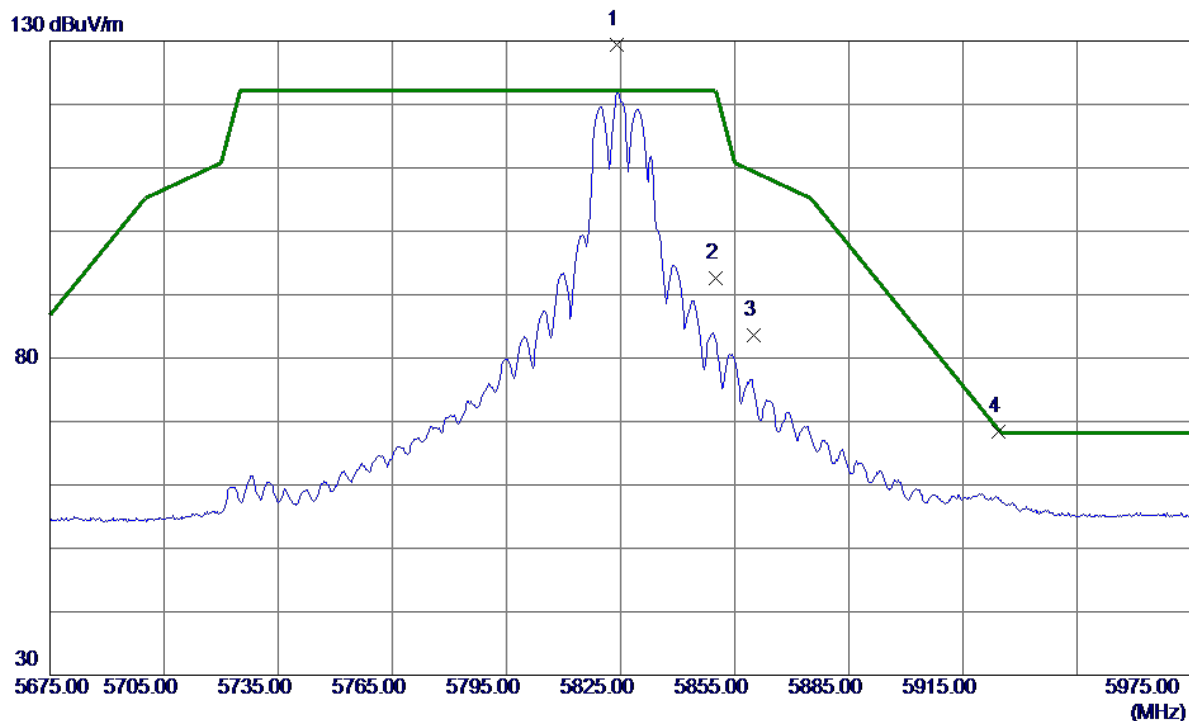


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5824.1000	112.37	17.04	129.41	122.20	7.21	Peak	No Limit
2	5850.0000	75.48	17.13	92.61	122.20	-29.59	Peak	
3	5860.0000	66.38	17.17	83.55	109.40	-25.85	Peak	
4	5924.3000	51.08	17.39	68.47	68.72	-0.25	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

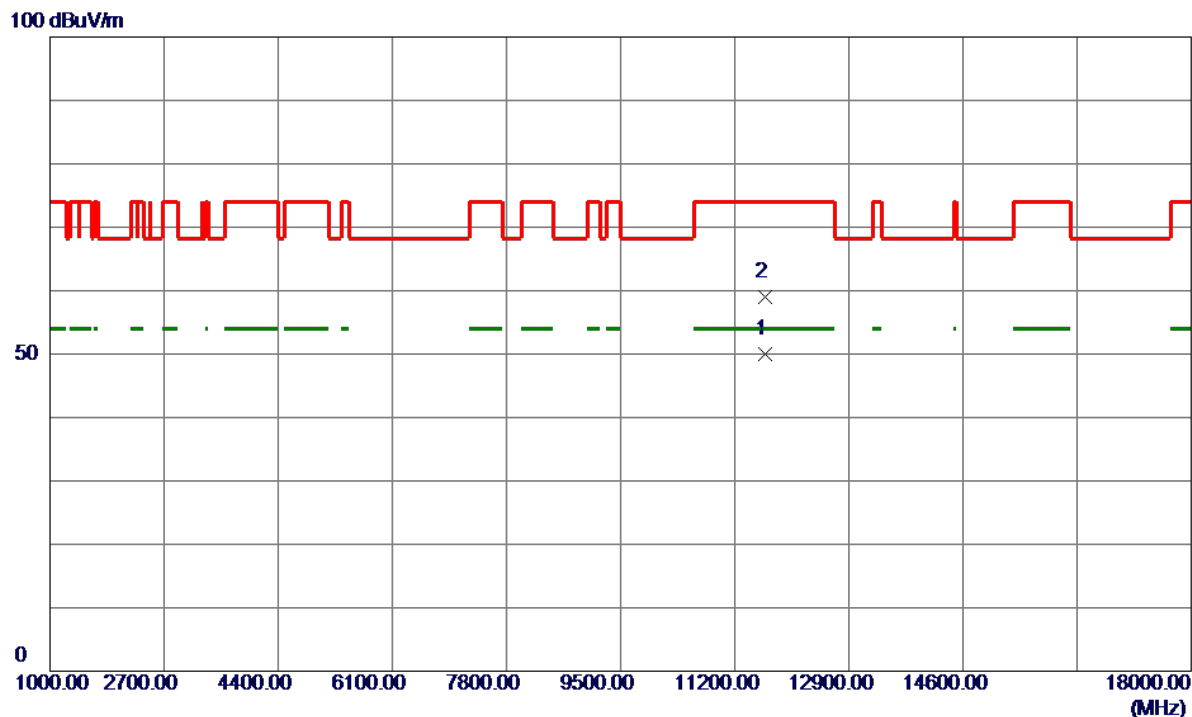


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11646.1000	40.59	9.35	49.94	54.00	-4.06	AVG	
2	11650.8000	49.65	9.36	59.01	74.00	-14.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

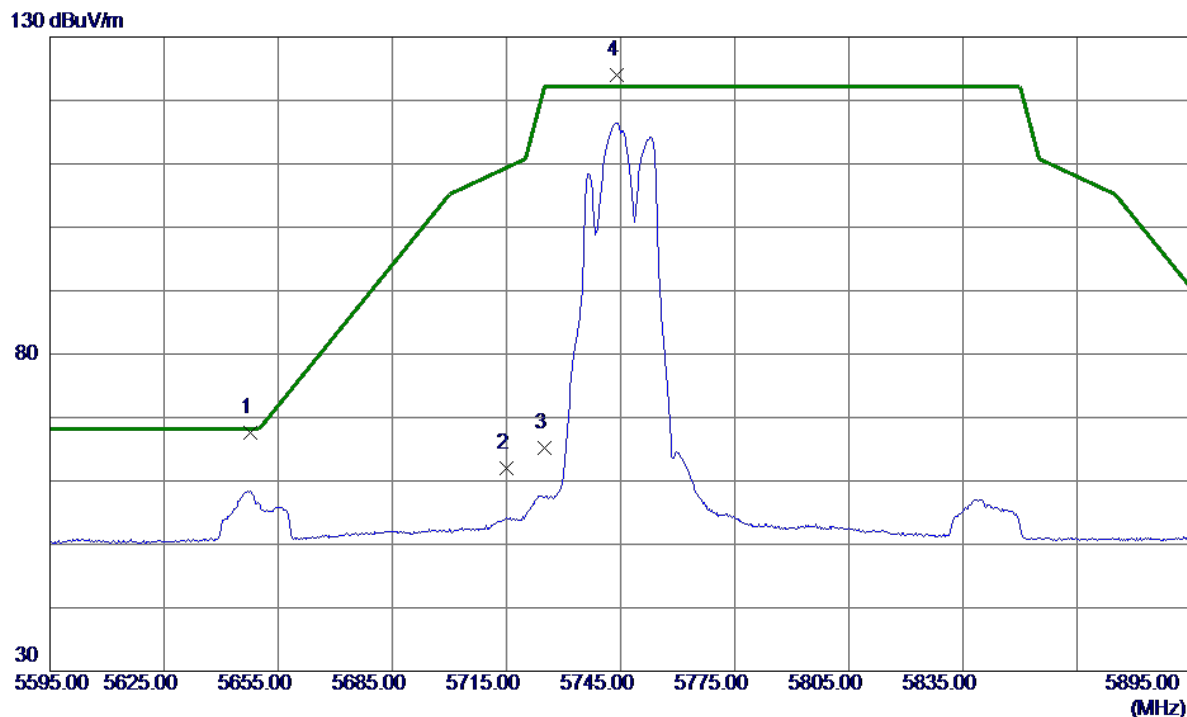


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5647.6000	51.10	16.42	67.52	68.20	-0.68	Peak	
2	5715.0000	45.27	16.66	61.93	109.40	-47.47	Peak	
3	5725.0000	48.44	16.69	65.13	122.20	-57.07	Peak	
4 *	5744.1000	107.18	16.76	123.94	122.20	1.74	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

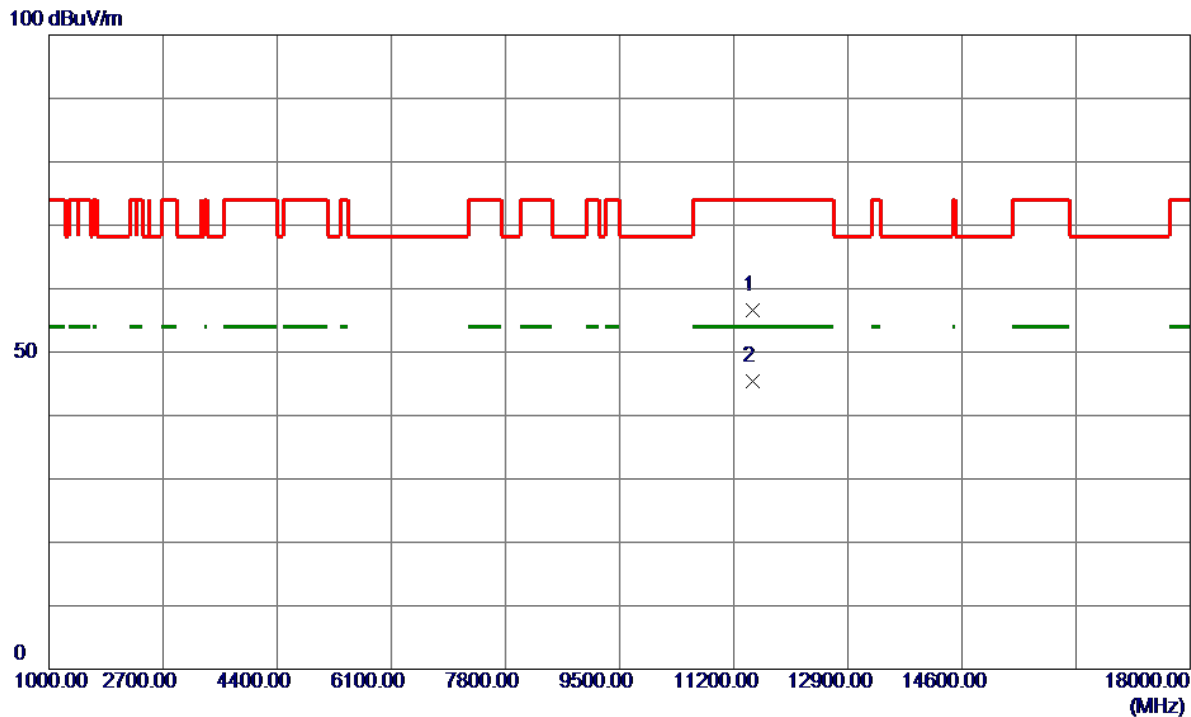


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11487.9000	47.44	9.09	56.53	74.00	-17.47	Peak	
2 *	11490.7000	36.41	9.08	45.49	54.00	-8.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

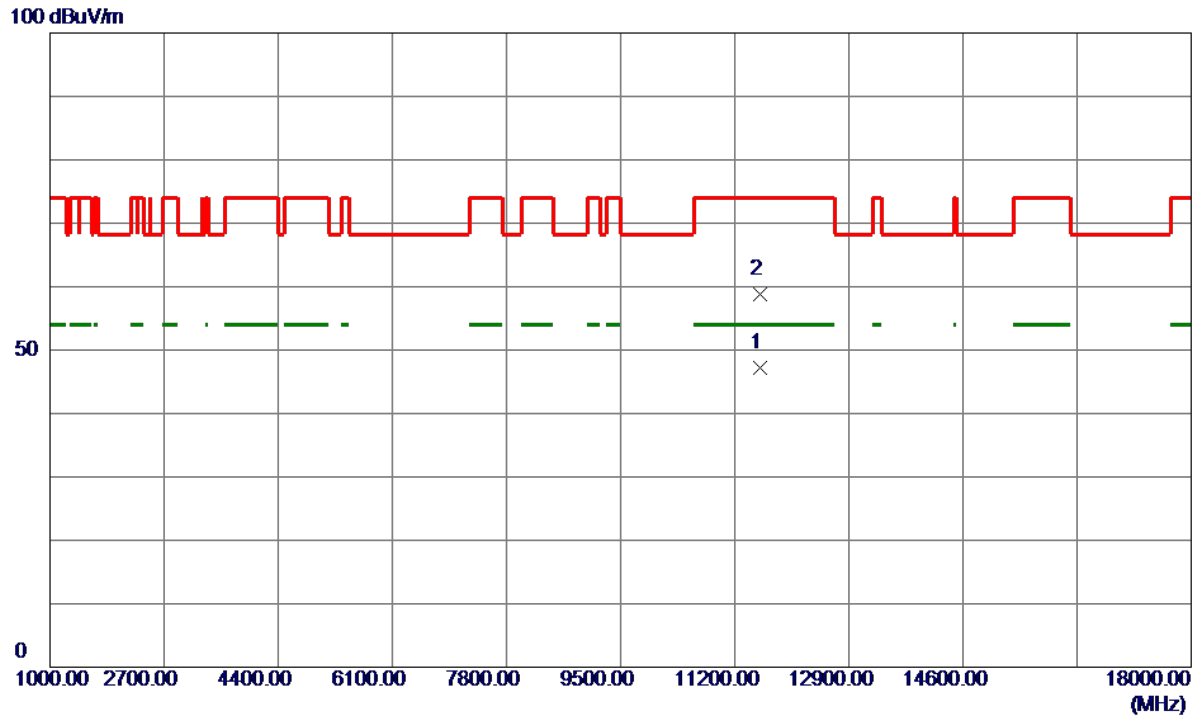


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.8000	37.94	9.21	47.15	54.00	-6.85	AVG	
2	11571.8000	49.67	9.21	58.88	74.00	-15.12	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

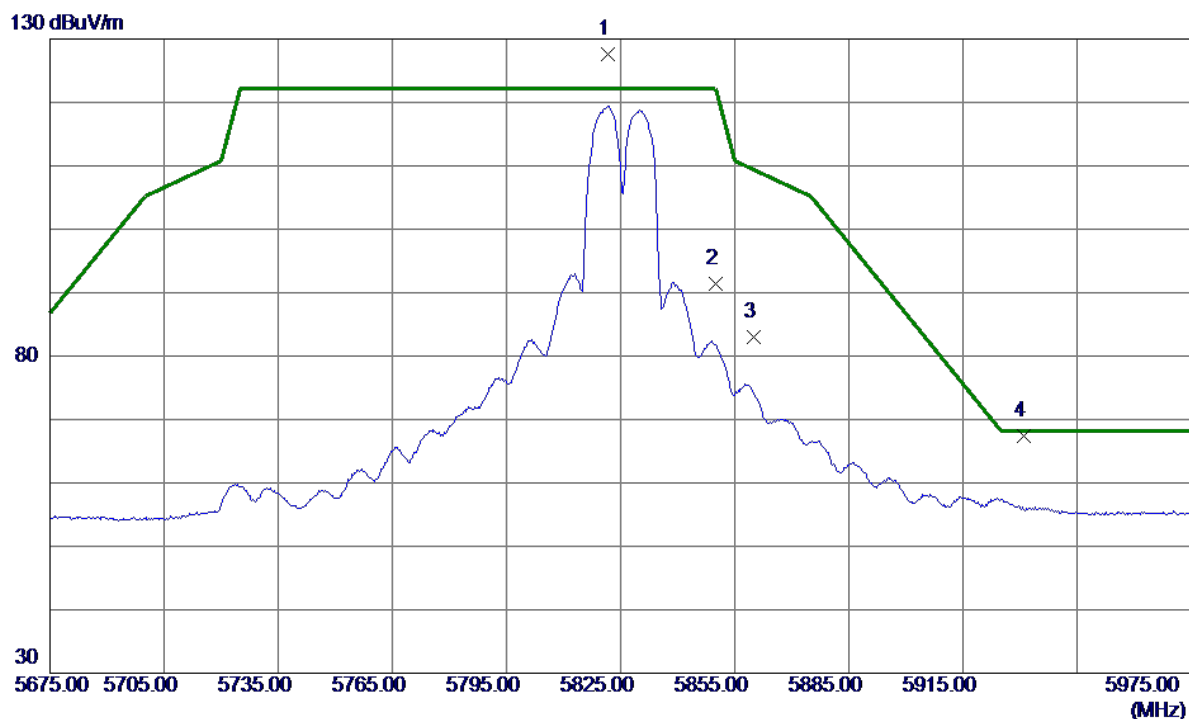


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5821.7000	110.50	17.03	127.53	122.20	5.33	Peak	No Limit
2	5850.0000	74.18	17.13	91.31	122.20	-30.89	Peak	
3	5860.0000	65.91	17.17	83.08	109.40	-26.32	Peak	
4	5930.9000	50.07	17.42	67.49	68.20	-0.71	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

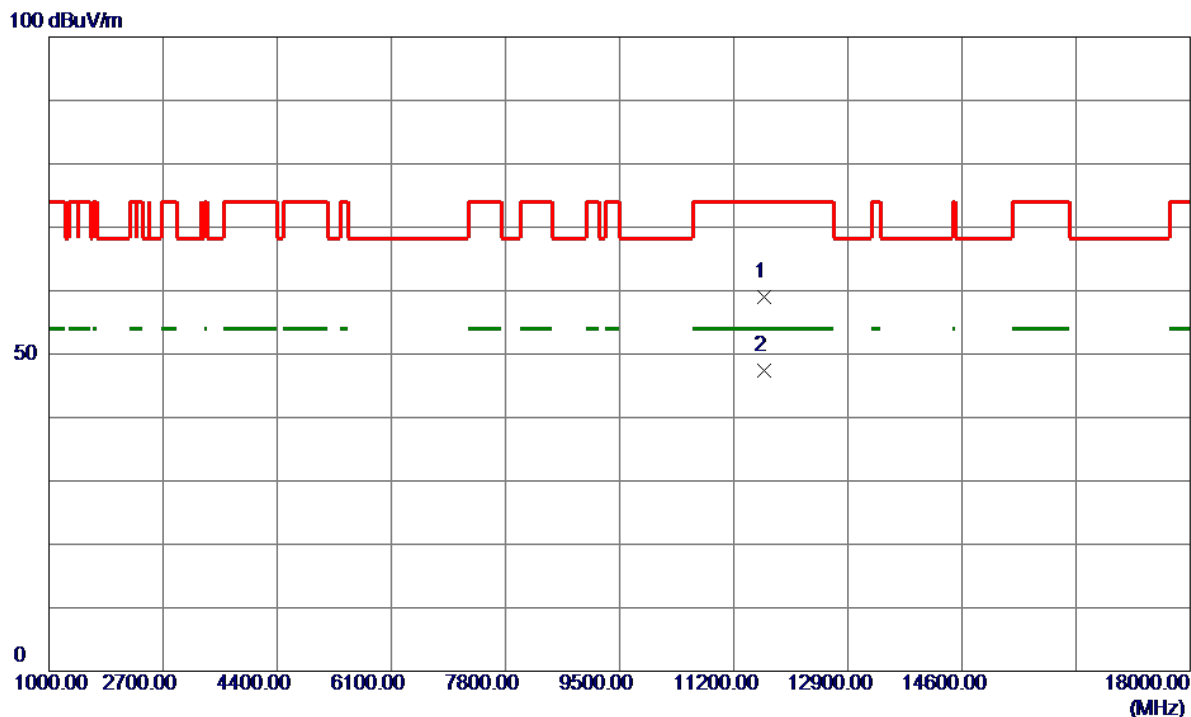


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11651.1500	49.65	9.36	59.01	74.00	-14.99	Peak	
2 *	11651.7000	37.98	9.36	47.34	54.00	-6.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

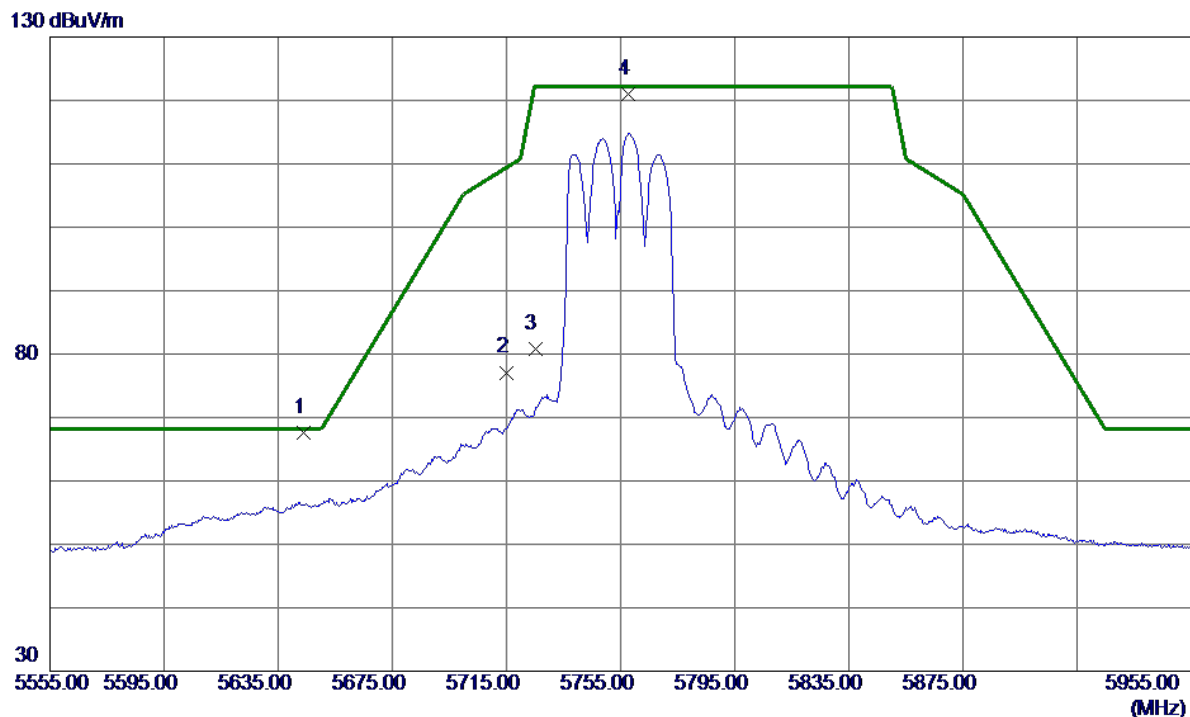


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5643.8000	51.14	16.41	67.55	68.20	-0.65	Peak	
2	5715.0000	60.44	16.66	77.10	109.40	-32.30	Peak	
3	5725.0000	64.15	16.69	80.84	122.20	-41.36	Peak	
4	5757.8000	104.10	16.81	120.91	122.20	-1.29	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

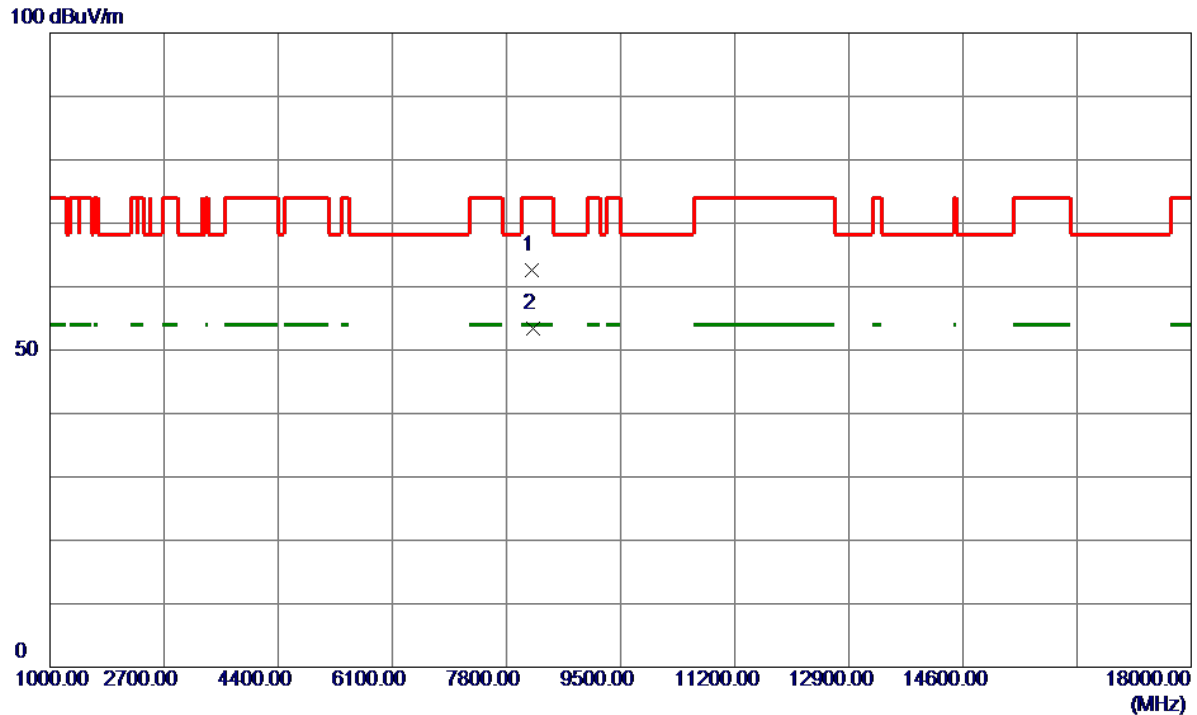


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	8177.0590	54.37	8.31	62.68	74.00	-11.32	Peak	
2 *	8191.0590	45.04	8.34	53.38	54.00	-0.62	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

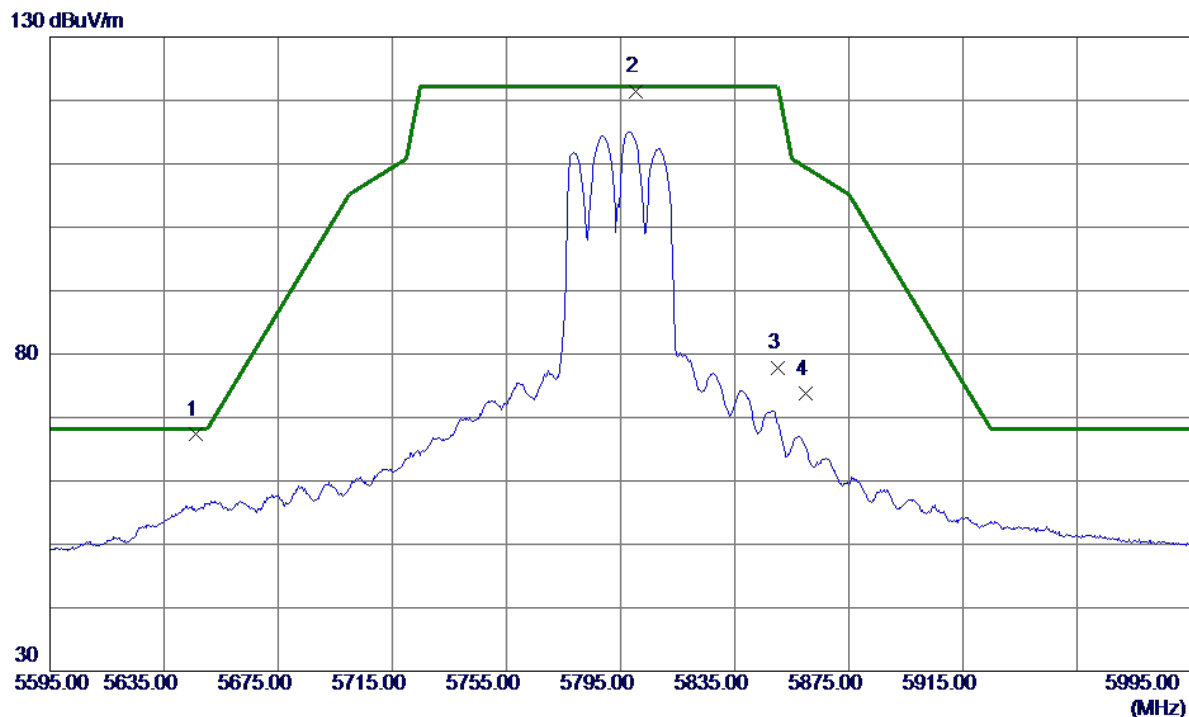


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5646.2000	50.88	16.42	67.30	68.20	-0.90	Peak	
2 *	5800.2000	104.35	16.96	121.31	122.20	-0.89	Peak	No Limit
3	5850.0000	60.70	17.13	77.83	122.20	-44.37	Peak	
4	5860.0000	56.53	17.17	73.70	109.40	-35.70	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

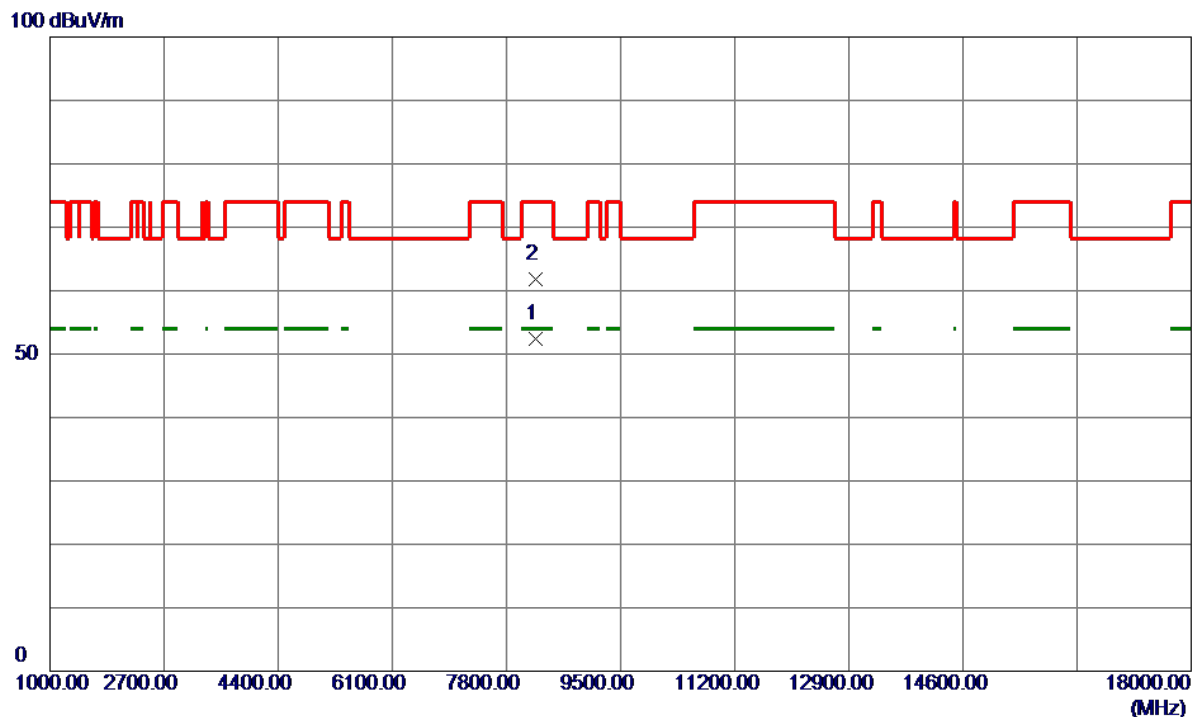


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	8225.4589	44.01	8.40	52.41	54.00	-1.59	AVG	
2	8232.4589	53.30	8.41	61.71	74.00	-12.29	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

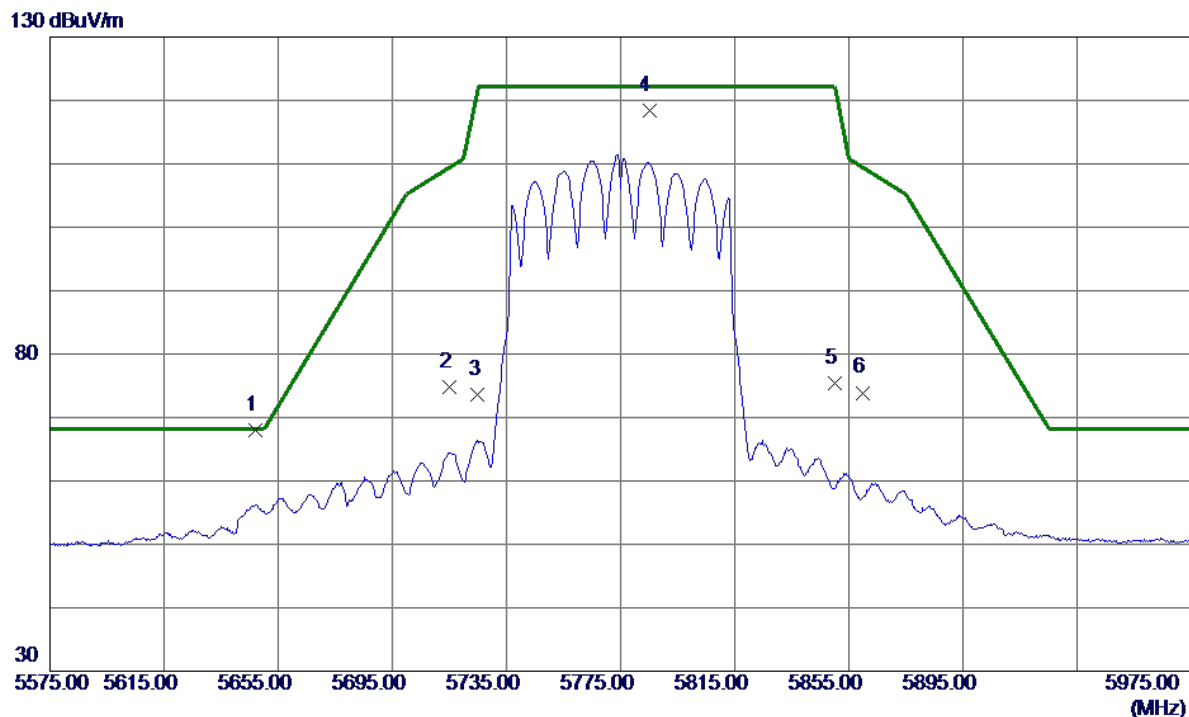


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5647.0000	51.55	16.42	67.97	68.20	-0.23	Peak	
2	5715.0000	58.21	16.66	74.87	109.40	-34.53	Peak	
3	5725.0000	56.90	16.69	73.59	122.20	-48.61	Peak	
4	5785.0000	101.50	16.91	118.41	122.20	-3.79	Peak	No Limit
5	5850.0000	58.31	17.13	75.44	122.20	-46.76	Peak	
6	5860.0000	56.73	17.17	73.90	109.40	-35.50	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

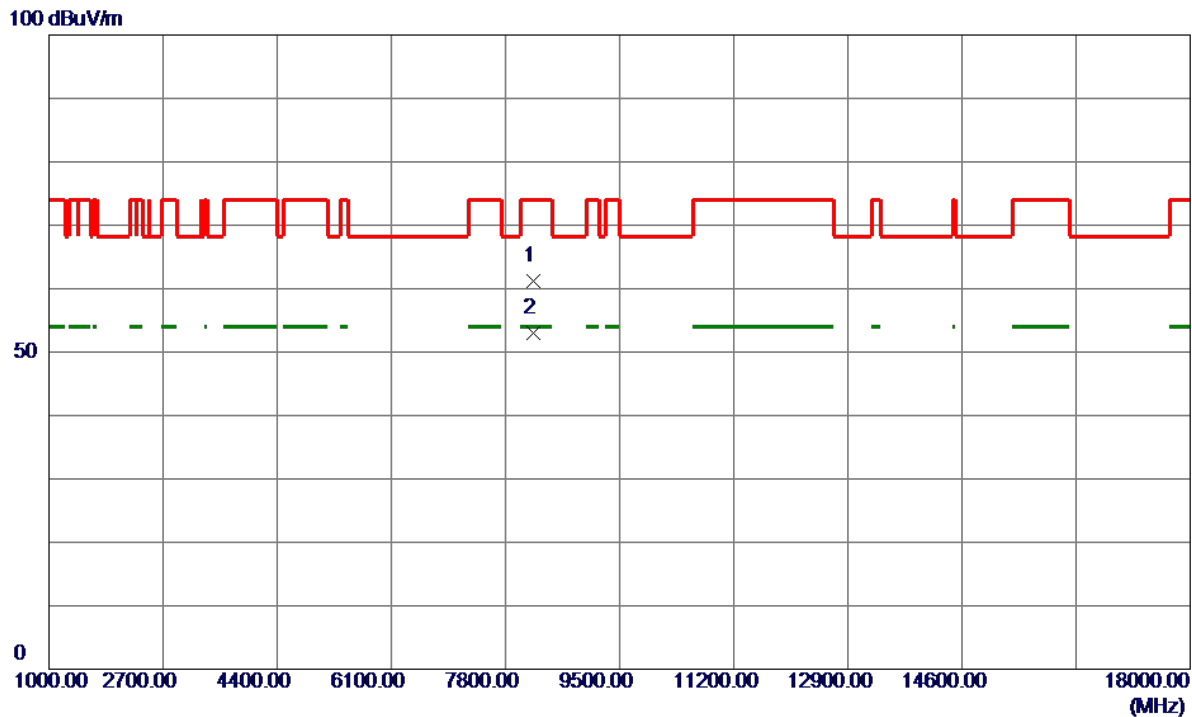


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	8214.6590	52.84	8.38	61.22	74.00	-12.78	Peak	
2 *	8216.2590	44.60	8.38	52.98	54.00	-1.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

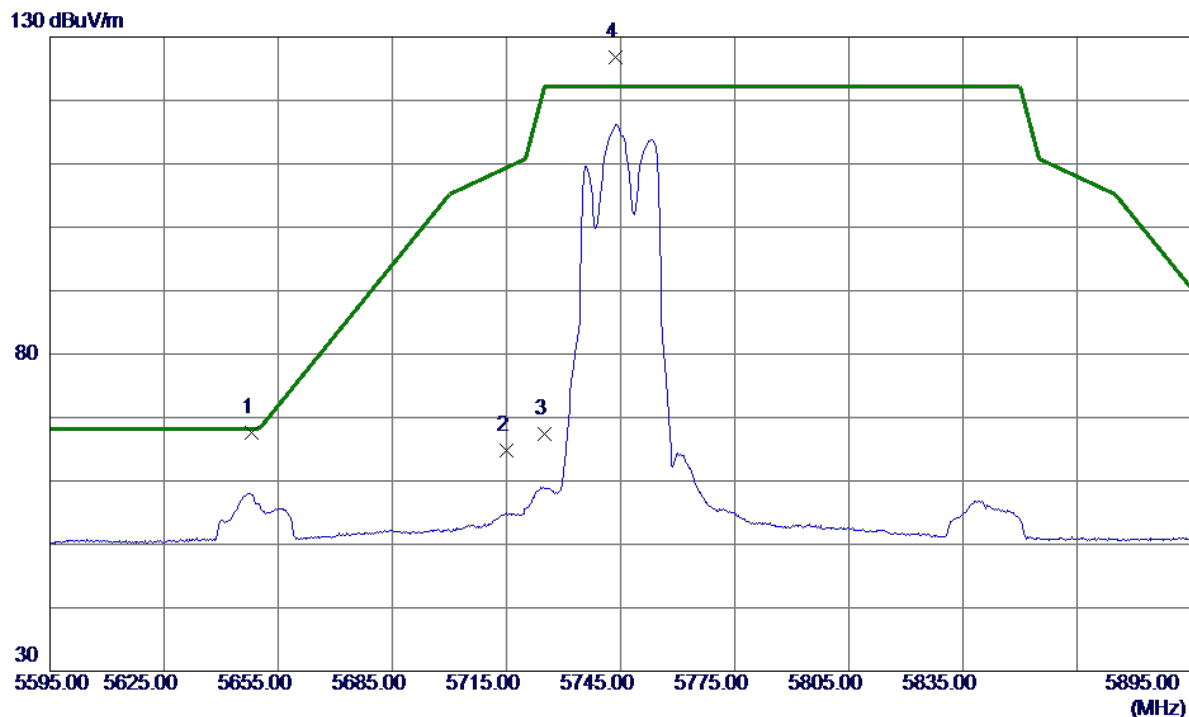


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5648.1000	51.18	16.42	67.60	68.20	-0.60	Peak	
2	5715.0000	48.05	16.66	64.71	109.40	-44.69	Peak	
3	5725.0000	50.76	16.69	67.45	122.20	-54.75	Peak	
4 *	5743.8000	109.99	16.76	126.75	122.20	4.55	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

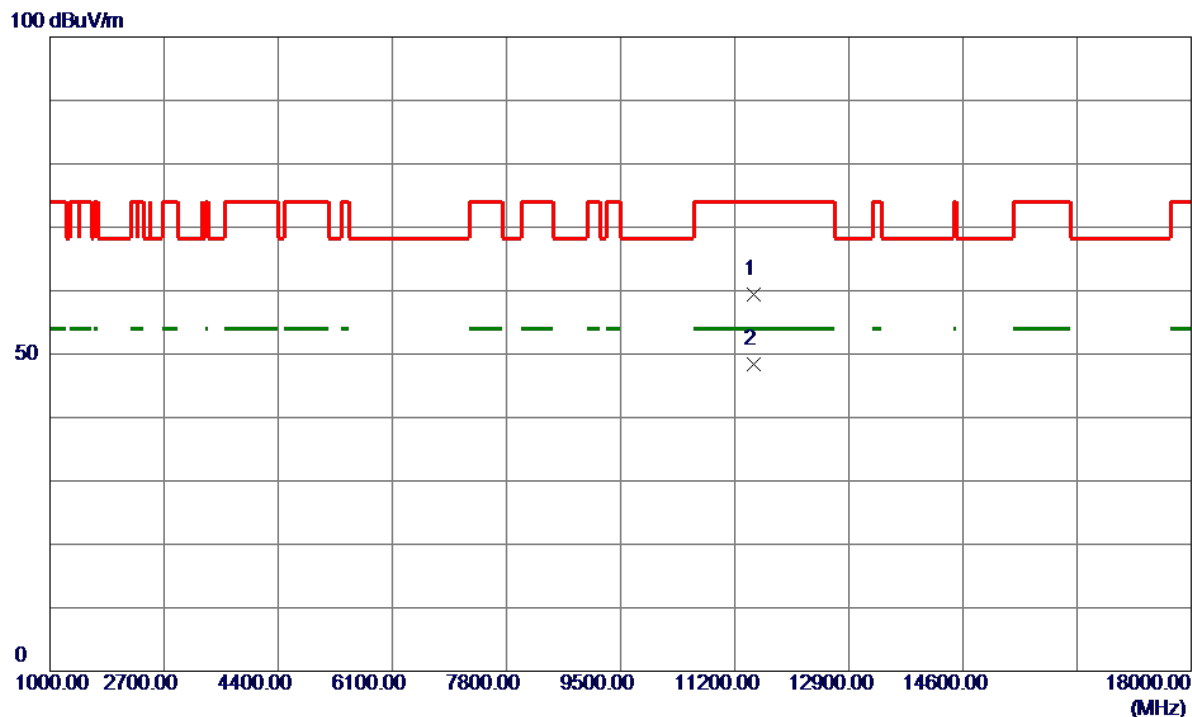


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11491.2000	50.35	9.08	59.43	74.00	-14.57	Peak	
2 *	11491.8000	39.24	9.08	48.32	54.00	-5.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

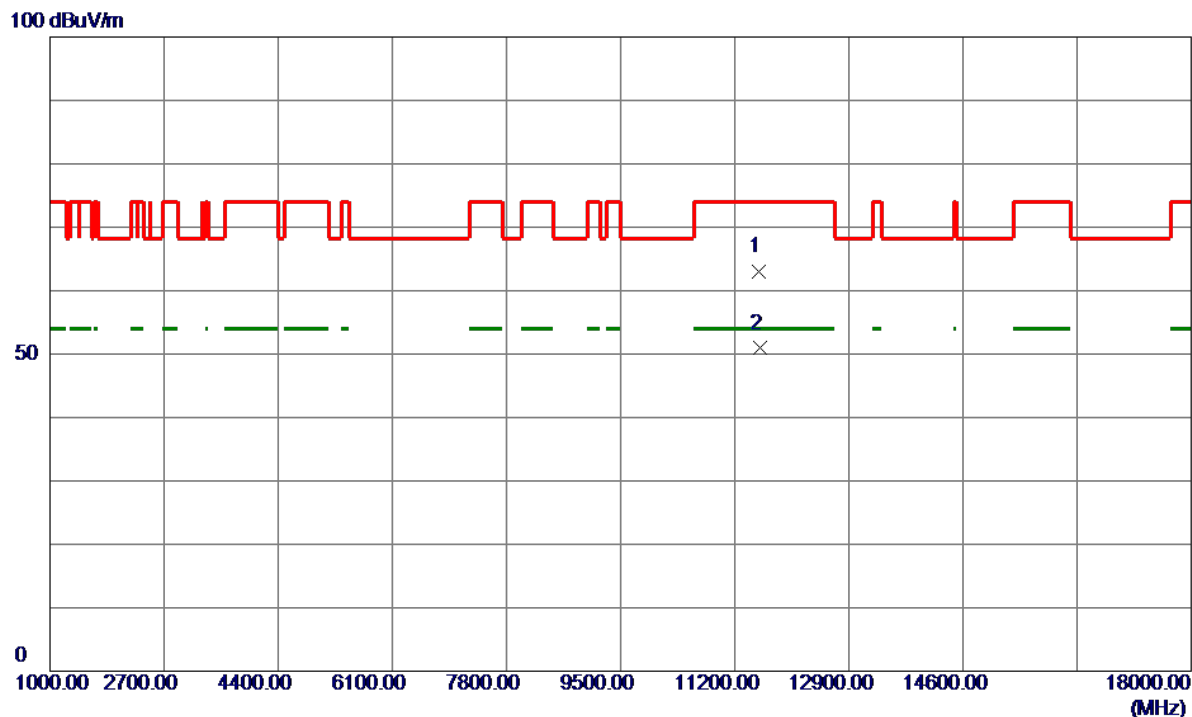


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11561.6000	53.79	9.19	62.98	74.00	-11.02	Peak	
2 *	11571.5000	41.69	9.21	50.90	54.00	-3.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

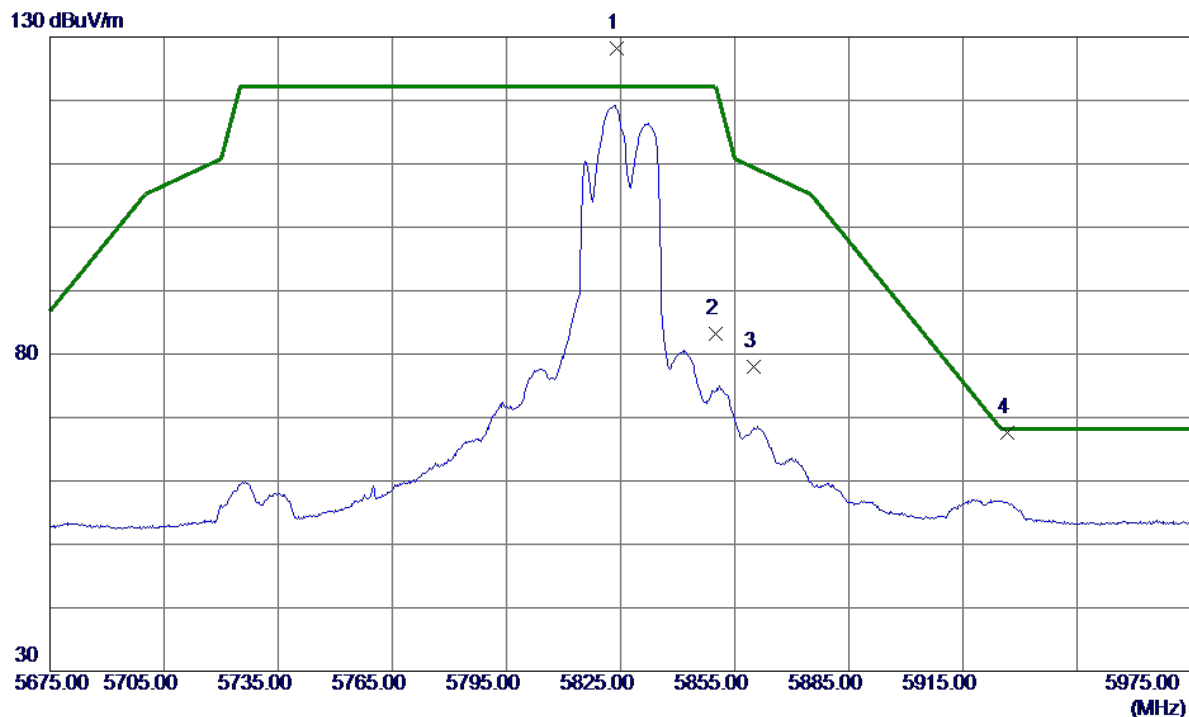


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5824.1000	111.21	17.04	128.25	122.20	6.05	Peak	No Limit
2	5850.0000	66.00	17.13	83.13	122.20	-39.07	Peak	
3	5860.0000	60.92	17.17	78.09	109.40	-31.31	Peak	
4	5926.7000	50.14	17.40	67.54	68.20	-0.66	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

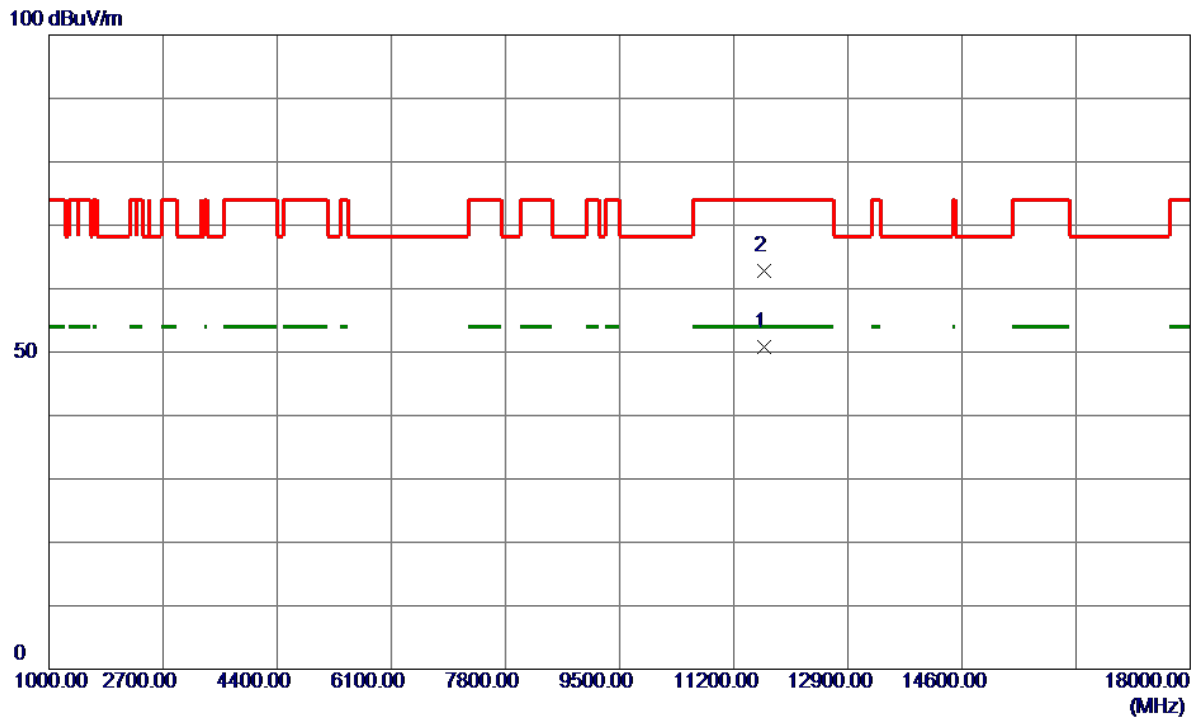


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11651.6000	41.49	9.36	50.85	54.00	-3.15	AVG	
2	11652.9000	53.44	9.36	62.80	74.00	-11.20	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

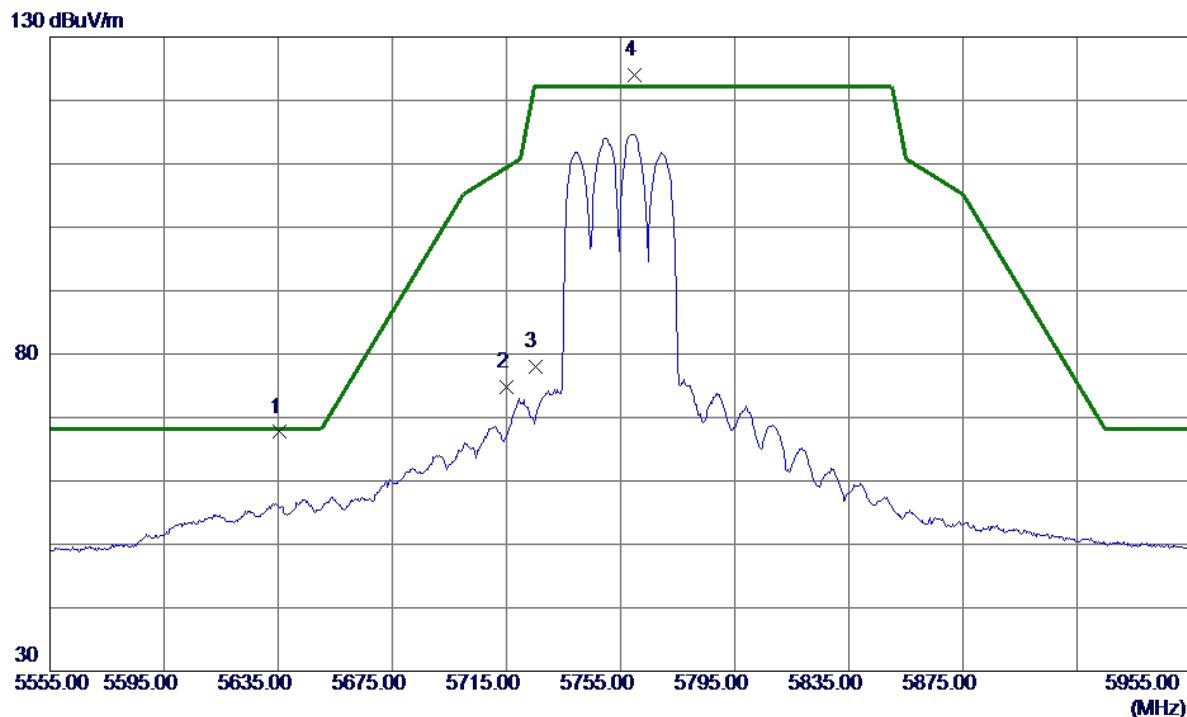


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5635.4000	51.32	16.38	67.70	68.20	-0.50	Peak	
2	5715.0000	58.23	16.66	74.89	109.40	-34.51	Peak	
3	5725.0000	61.35	16.69	78.04	122.20	-44.16	Peak	
4 *	5759.8000	107.23	16.82	124.05	122.20	1.85	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

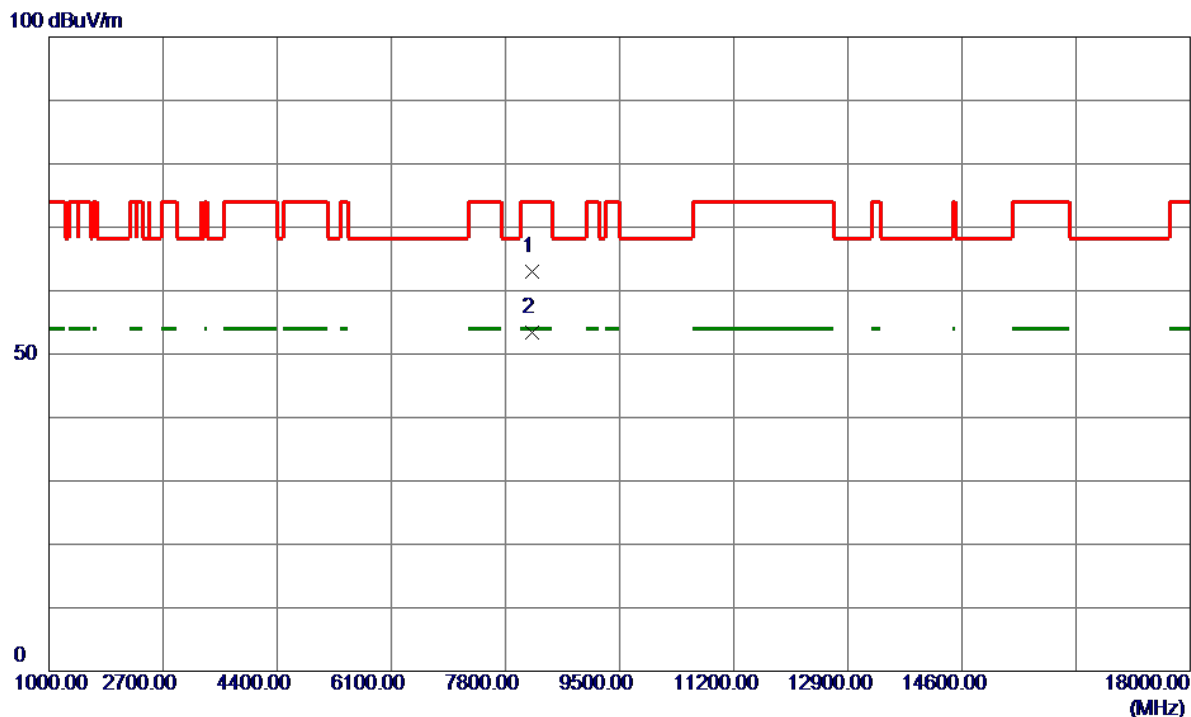


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	8191.8590	54.73	8.34	63.07	74.00	-10.93	Peak	
2 *	8192.2590	45.11	8.34	53.45	54.00	-0.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

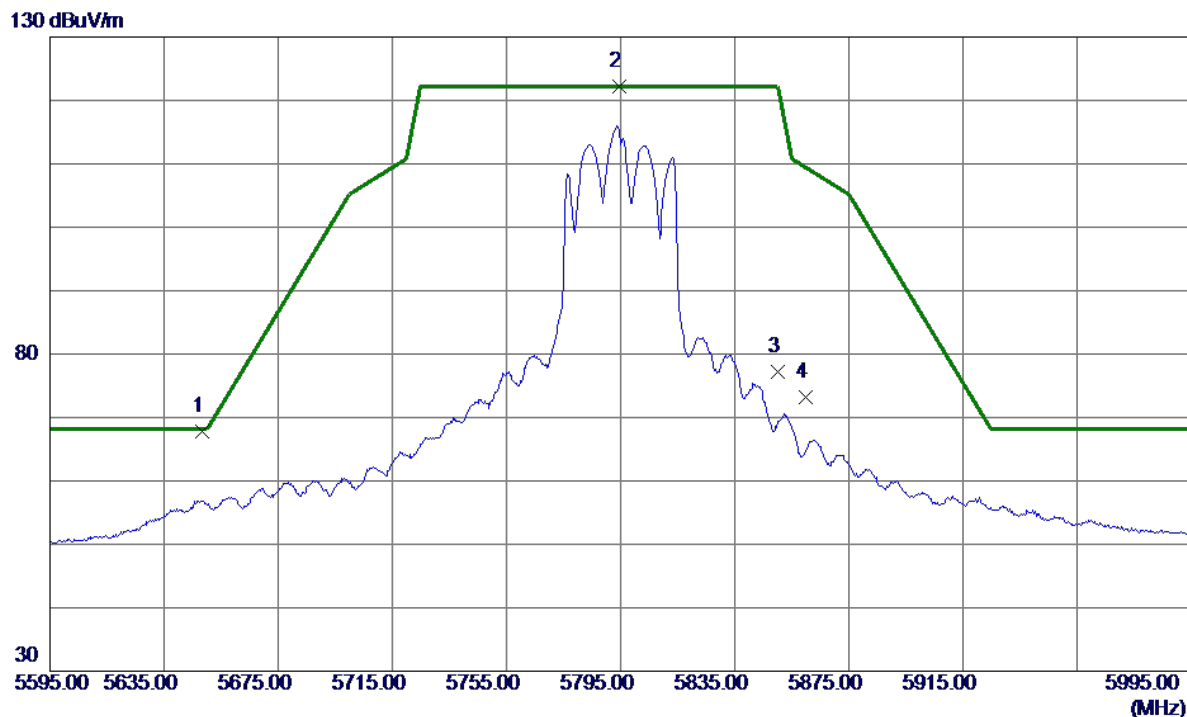


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5648.2000	51.36	16.43	67.79	68.20	-0.41	Peak	
2 *	5794.6000	105.34	16.94	122.28	122.20	0.08	Peak	No Limit
3	5850.0000	60.13	17.13	77.26	122.20	-44.94	Peak	
4	5860.0000	56.07	17.17	73.24	109.40	-36.16	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

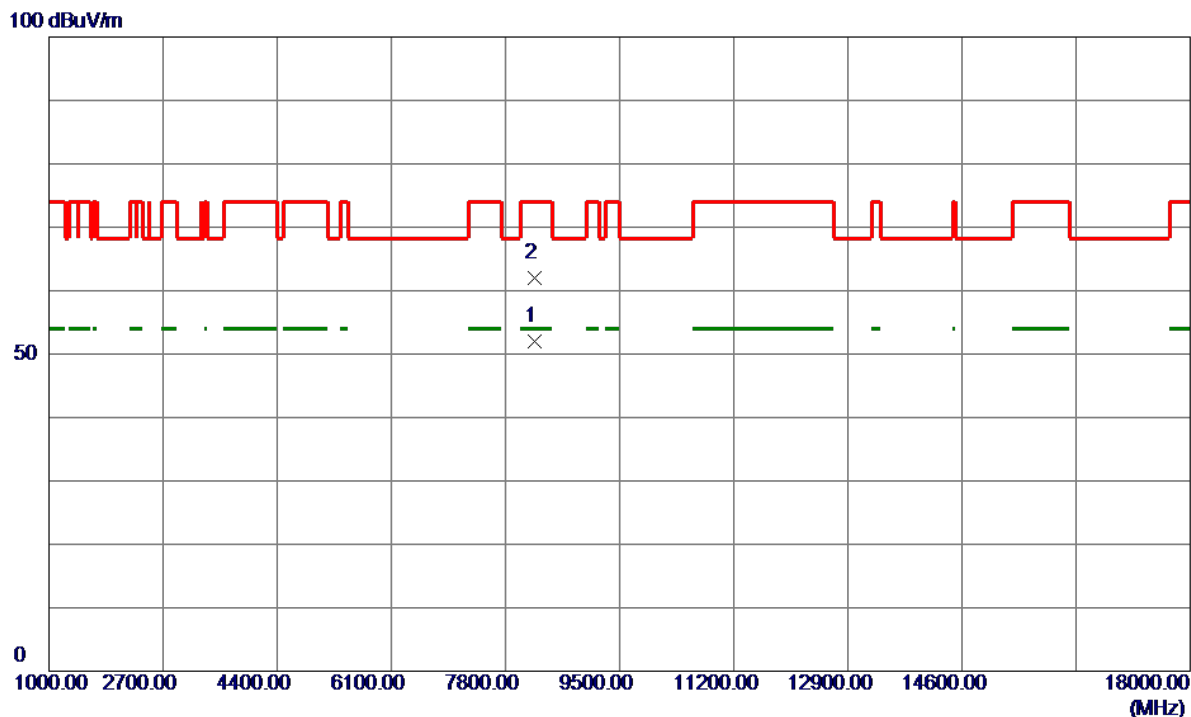


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	8233.1590	43.60	8.41	52.01	54.00	-1.99	AVG	
2	8233.4589	53.65	8.41	62.06	74.00	-11.94	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

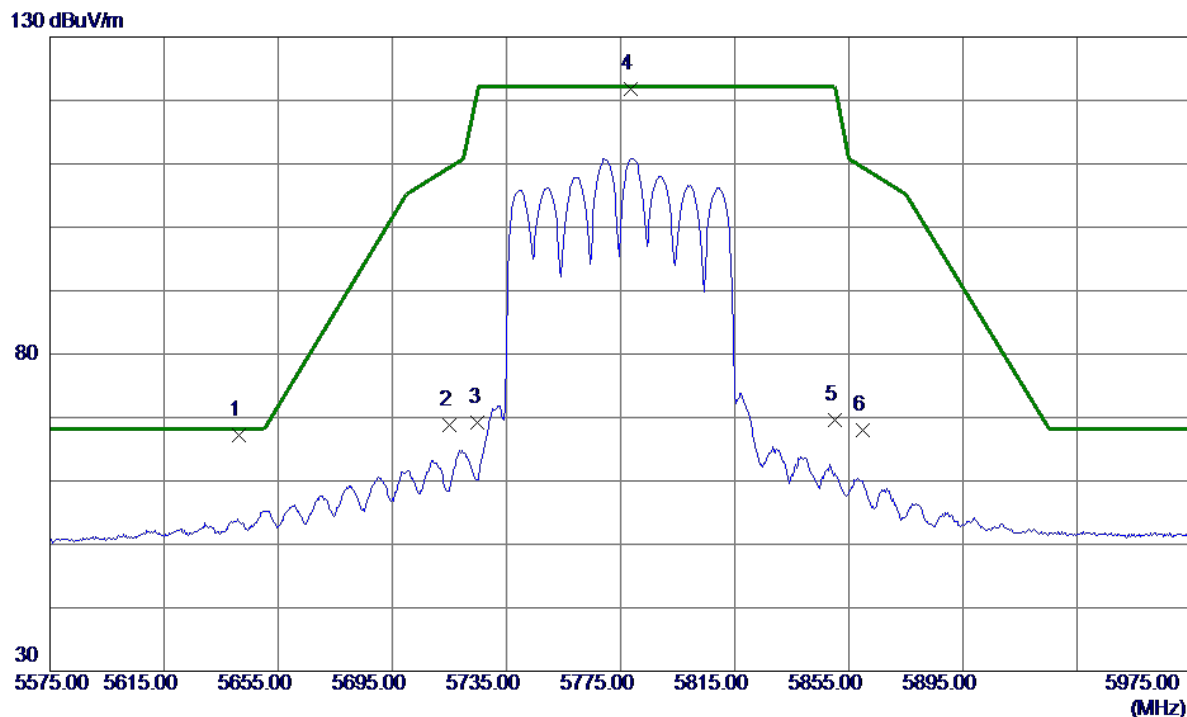


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5641.4000	50.89	16.40	67.29	68.20	-0.91	Peak	
2	5715.0000	52.15	16.66	68.81	109.40	-40.59	Peak	
3	5725.0000	52.42	16.69	69.11	122.20	-53.09	Peak	
4 *	5778.6000	104.87	16.88	121.75	122.20	-0.45	Peak	No Limit
5	5850.0000	52.45	17.13	69.58	122.20	-52.62	Peak	
6	5860.0000	50.78	17.17	67.95	109.40	-41.45	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

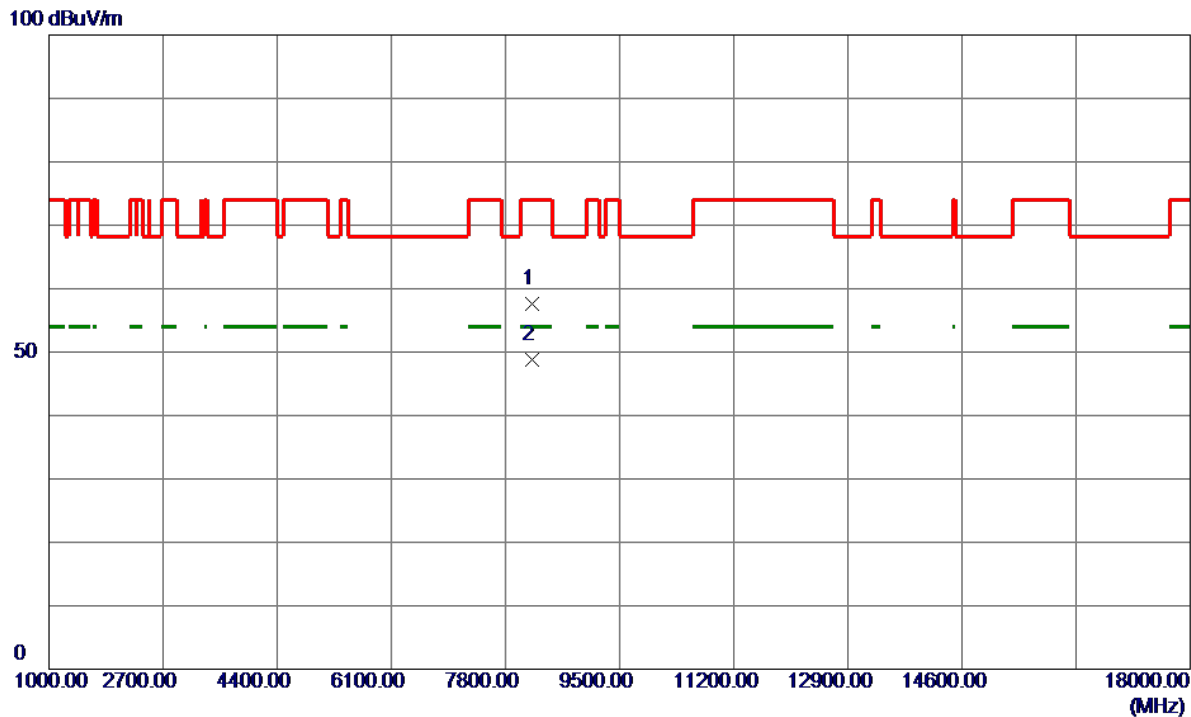


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	8195.6590	49.31	8.34	57.65	74.00	-16.35	Peak	
2 *	8205.2590	40.38	8.36	48.74	54.00	-5.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Worst Case:

Test Mode	UNII-1_TX AX(HE20) Mode 5240 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

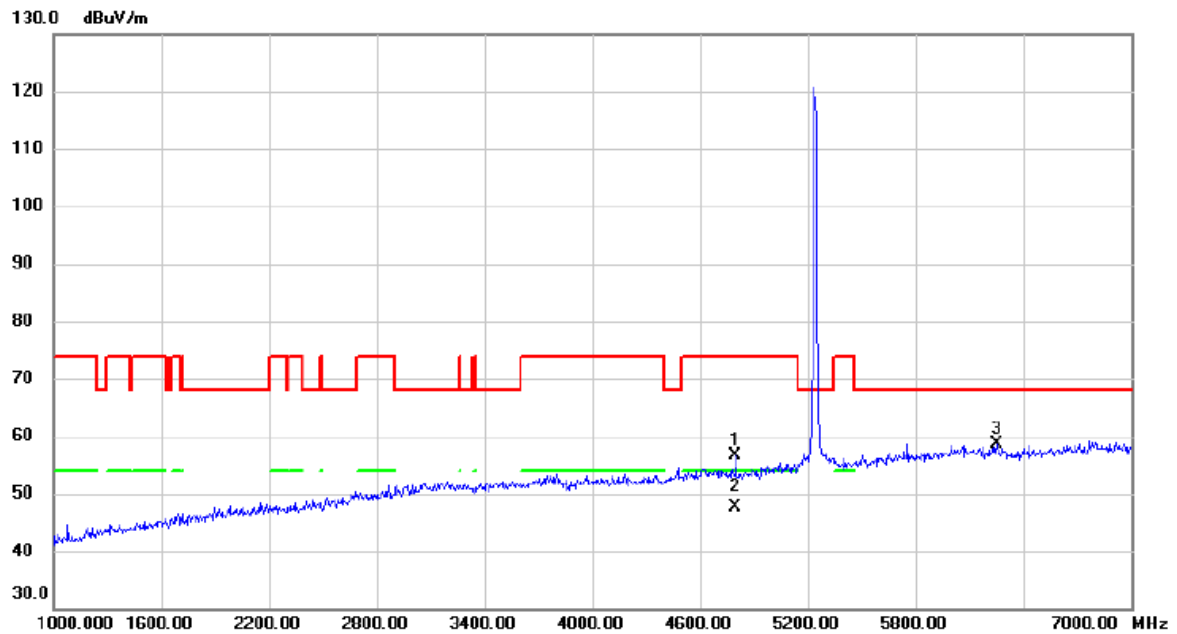


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4798.000	42.10	14.46	56.56	74.00	-17.44	peak	
2	*	4798.000	33.11	14.46	47.57	54.00	-6.43	AVG	
3		6250.000	40.74	17.94	58.68	68.20	-9.52	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5240 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

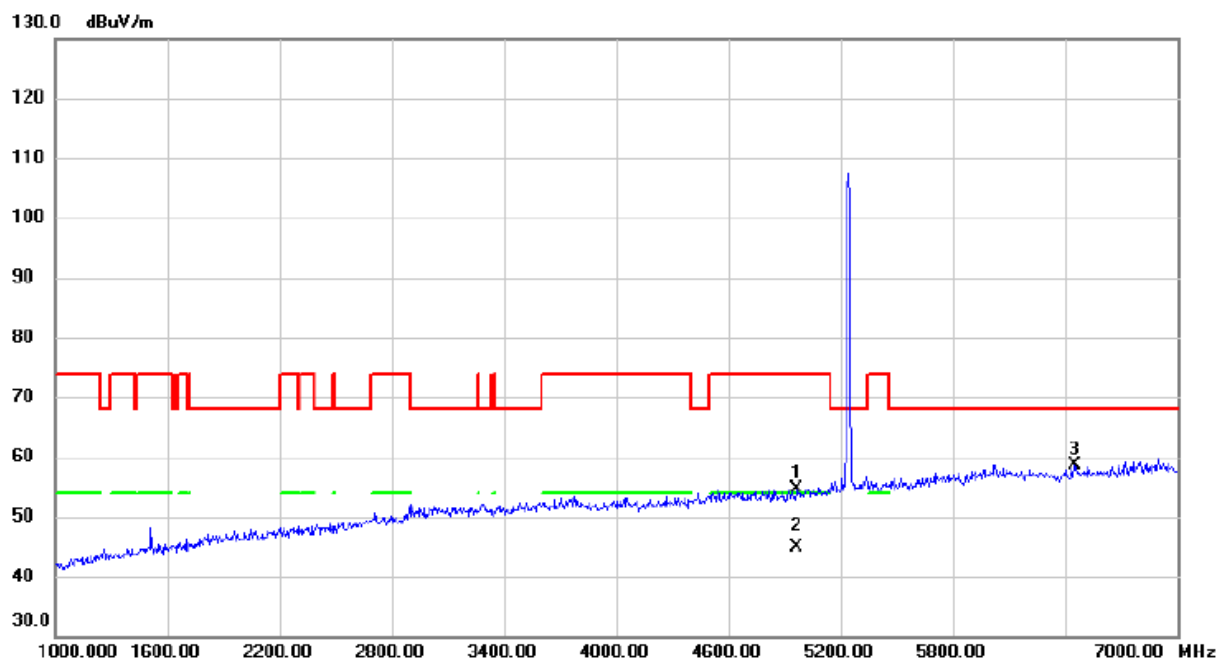


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4966.000	40.12	14.56	54.68	74.00	-19.32	peak	
2	*	4966.000	30.20	14.56	44.76	54.00	-9.24	AVG	
3		6448.000	40.56	18.18	58.74	68.20	-9.46	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5240 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

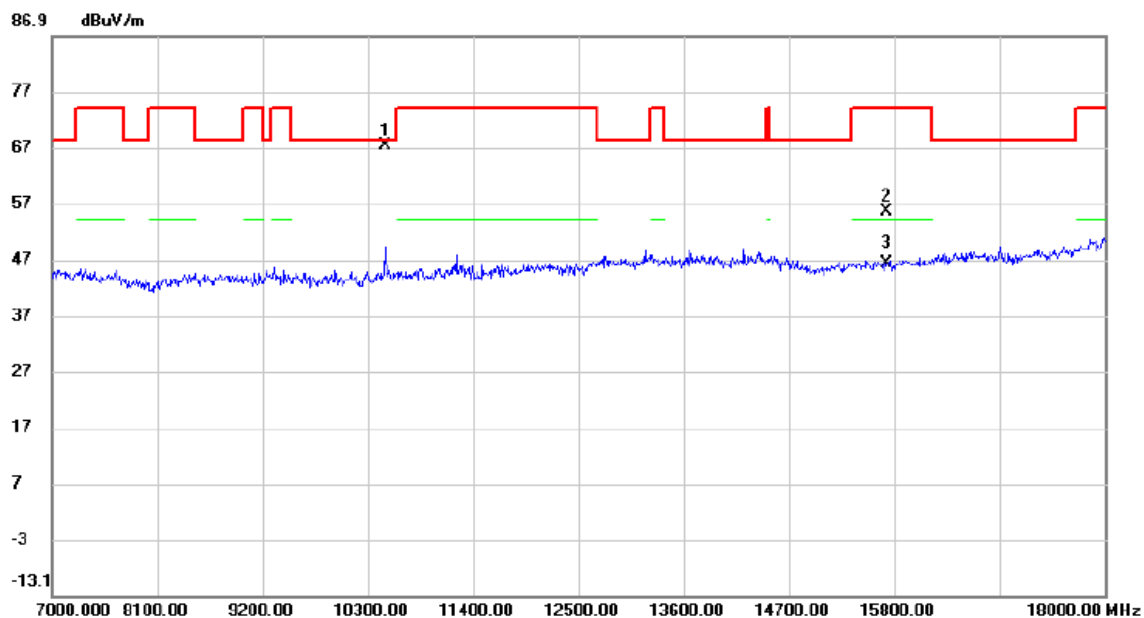


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10479.800	58.28	9.03	67.31	68.20	-0.89	peak	
2		15720.000	46.25	9.23	55.48	74.00	-18.52	peak	
3		15720.000	37.09	9.23	46.32	54.00	-7.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5240 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

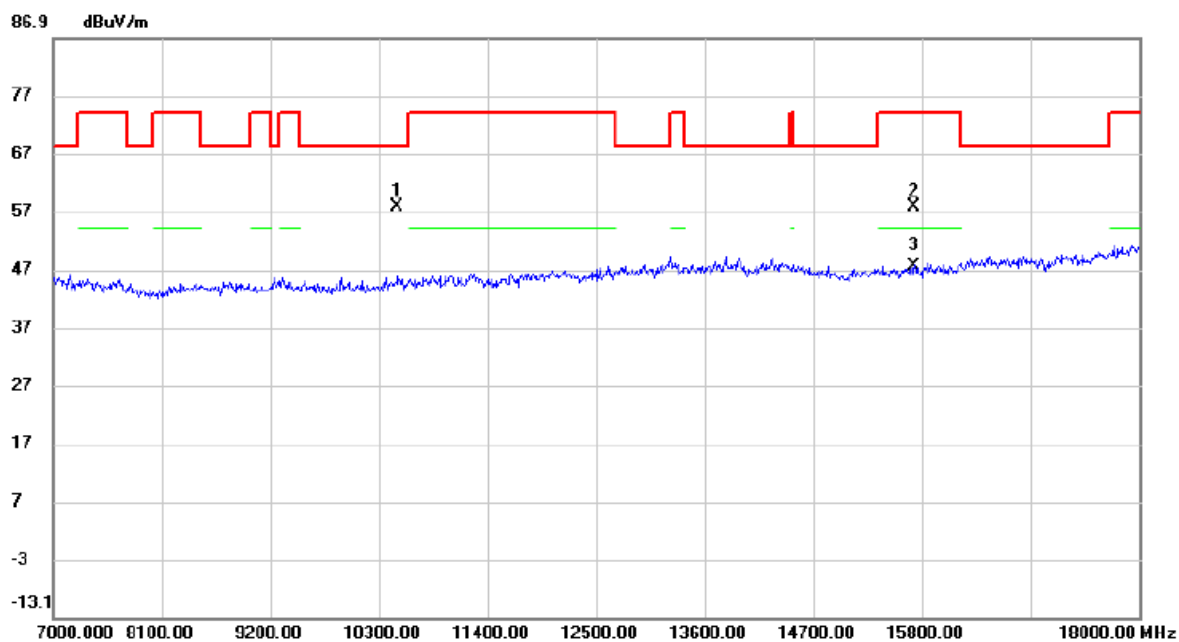


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10480.000	48.69	9.03	57.72	68.20	-10.48	peak	
2		15720.000	48.56	9.23	57.79	74.00	-16.21	peak	
3	*	15720.000	38.22	9.23	47.45	54.00	-6.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Straddle Channel:

Test Mode	UNII-2C_TX A Mode 5720 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

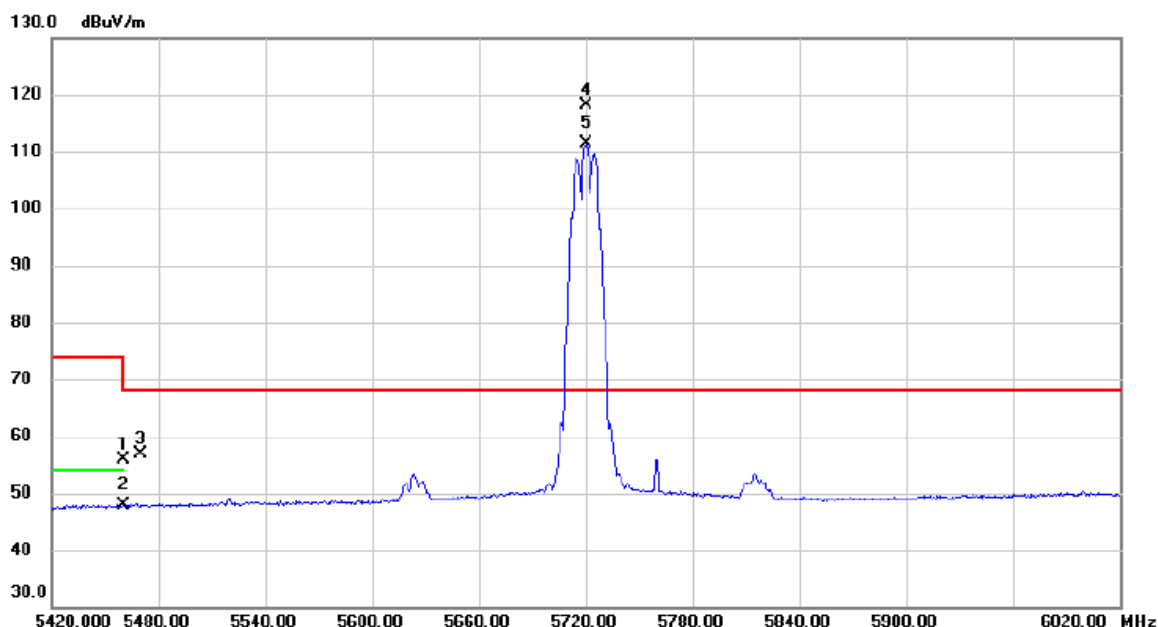


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	40.02	15.79	55.81	74.00	-18.19	peak	
2		5460.000	32.02	15.79	47.81	54.00	-6.19	AVG	
3		5470.000	40.99	15.83	56.82	68.20	-11.38	peak	
4	*	5720.600	101.36	16.68	118.04	68.20	49.84	peak	No Limit
5	X	5720.600	94.69	16.68	111.37	68.20	43.17	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5720 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

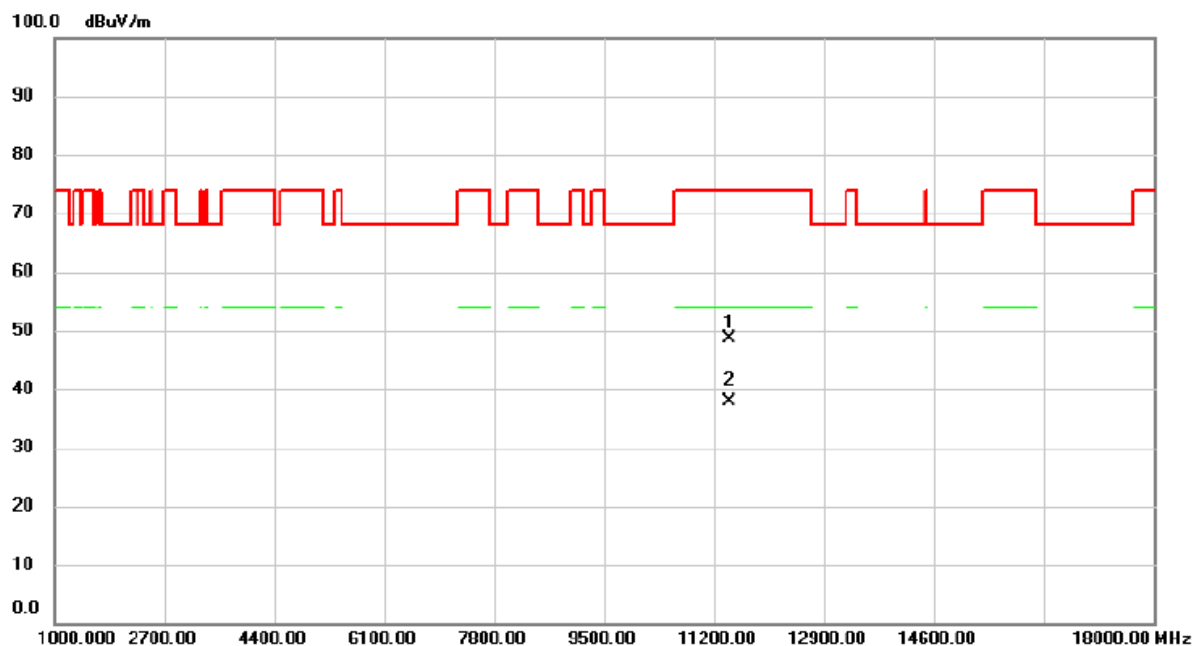


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11437.000	39.42	9.16	48.58	74.00	-25.42	peak	
2	*	11437.860	28.70	9.16	37.86	54.00	-16.14	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5720 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

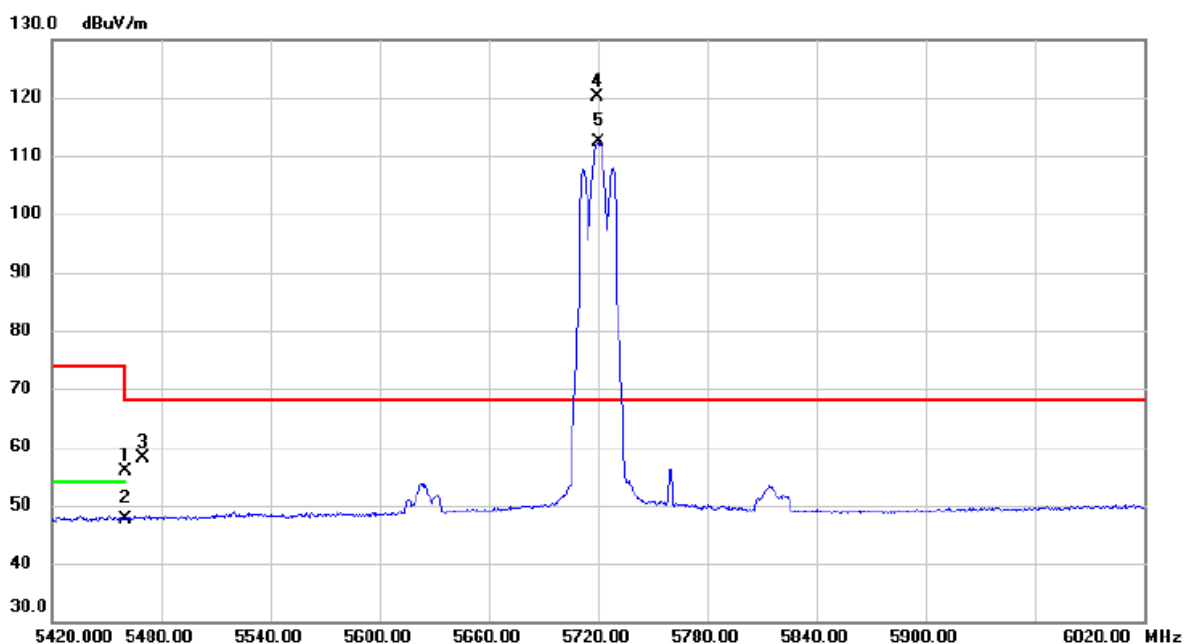


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5460.000	40.07	15.79	55.86	74.00	-18.14	peak	
2		5460.000	31.90	15.79	47.69	54.00	-6.31	AVG	
3		5470.000	42.26	15.83	58.09	68.20	-10.11	peak	
4	*	5719.400	103.39	16.68	120.07	68.20	51.87	peak	No Limit
5	X	5720.600	95.77	16.68	112.45	68.20	44.25	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5720 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

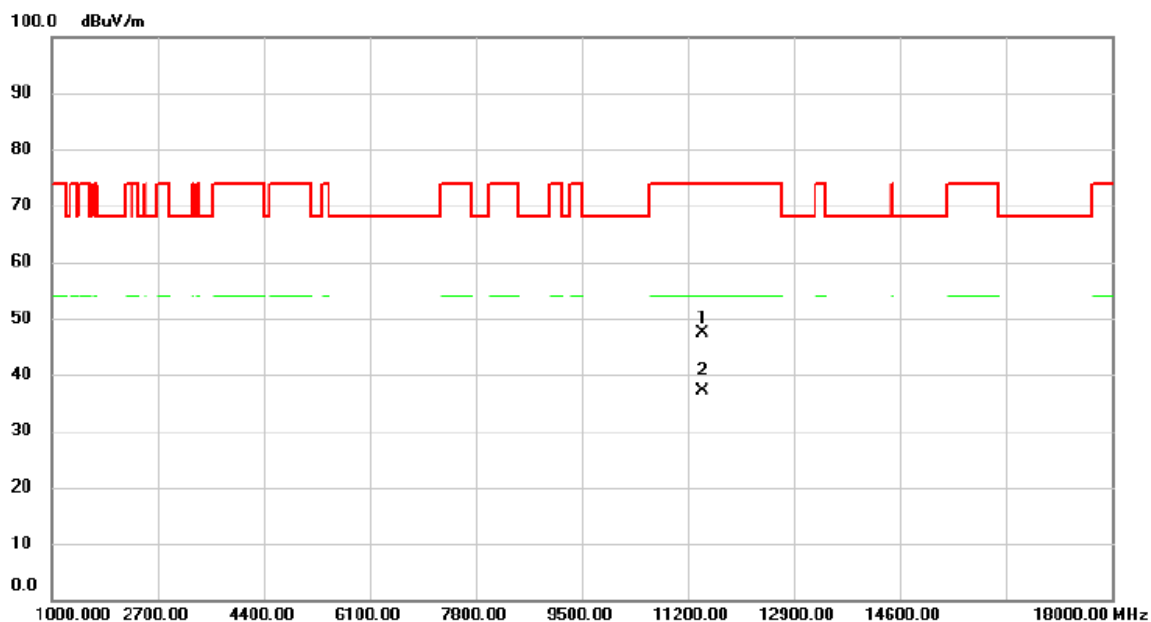


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11439.900	38.17	9.15	47.32	74.00	-26.68	peak	
2	*	11440.180	27.92	9.15	37.07	54.00	-16.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5710 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

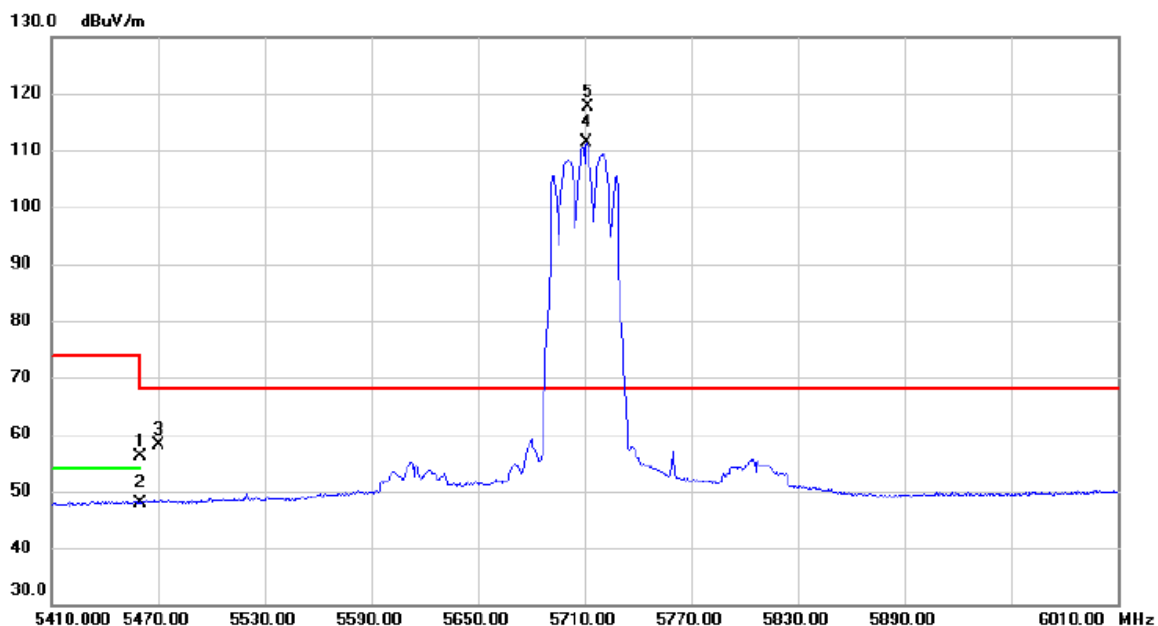


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	40.44	15.79	56.23	74.00	-17.77	peak	
2		5460.000	32.21	15.79	48.00	54.00	-6.00	AVG	
3		5470.000	42.25	15.83	58.08	68.20	-10.12	peak	
4	X	5711.200	94.71	16.65	111.36	68.20	43.16	AVG	No Limit
5	*	5712.400	100.93	16.65	117.58	68.20	49.38	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5710 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

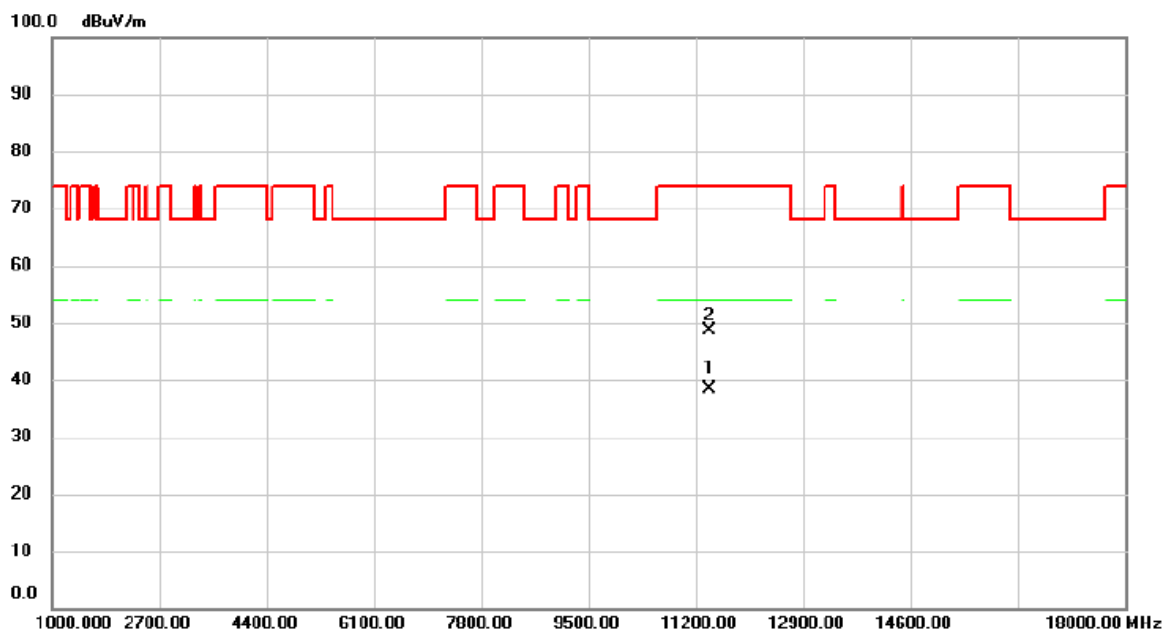


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11419.520	29.21	9.18	38.39	54.00	-15.61	AVG	
2		11419.600	39.44	9.18	48.62	74.00	-25.38	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5690 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

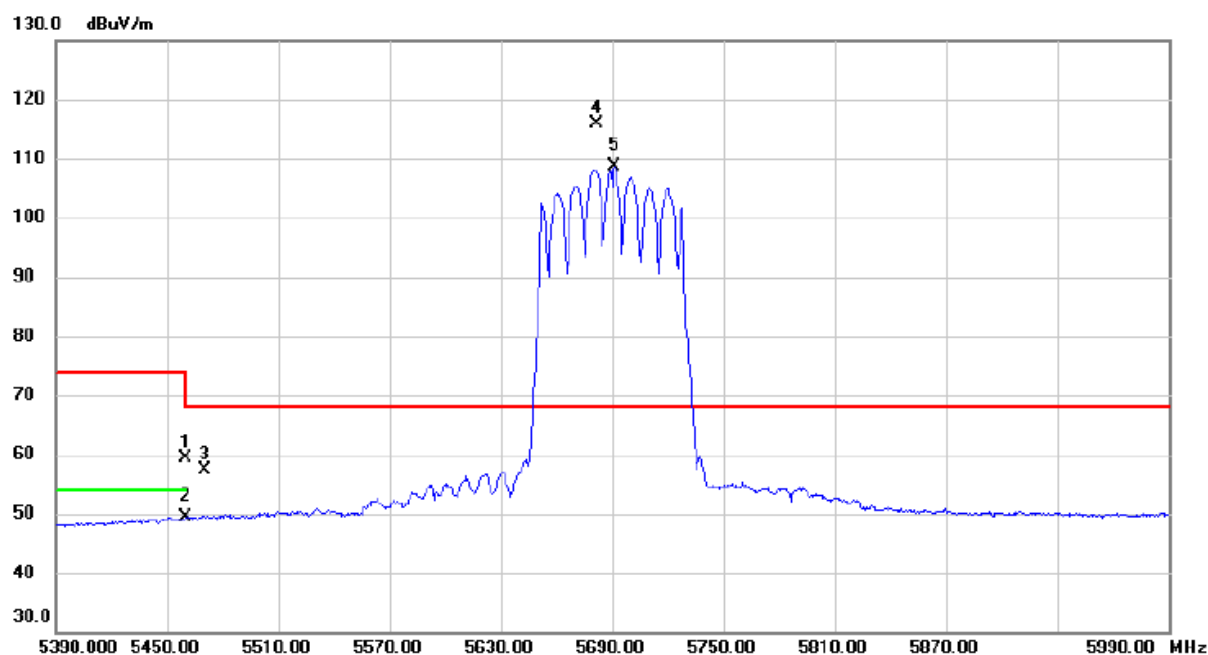


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	43.52	15.79	59.31	74.00	-14.69	peak	
2		5460.000	33.66	15.79	49.45	54.00	-4.55	AVG	
3		5470.000	41.64	15.83	57.47	68.20	-10.73	peak	
4	*	5681.600	99.37	16.54	115.91	68.20	47.71	peak	No Limit
5	X	5691.200	92.06	16.58	108.64	68.20	40.44	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5690 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

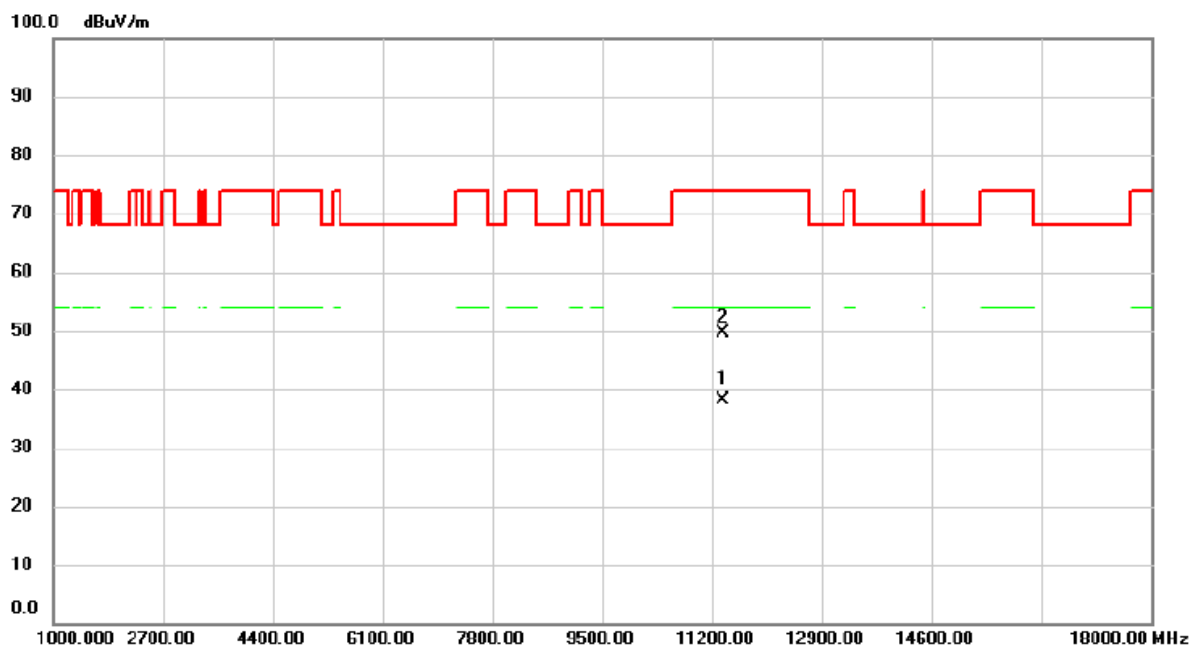


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11379.440	28.88	9.24	38.12	54.00	-15.88	AVG	
2		11380.080	40.36	9.24	49.60	74.00	-24.40	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5720 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

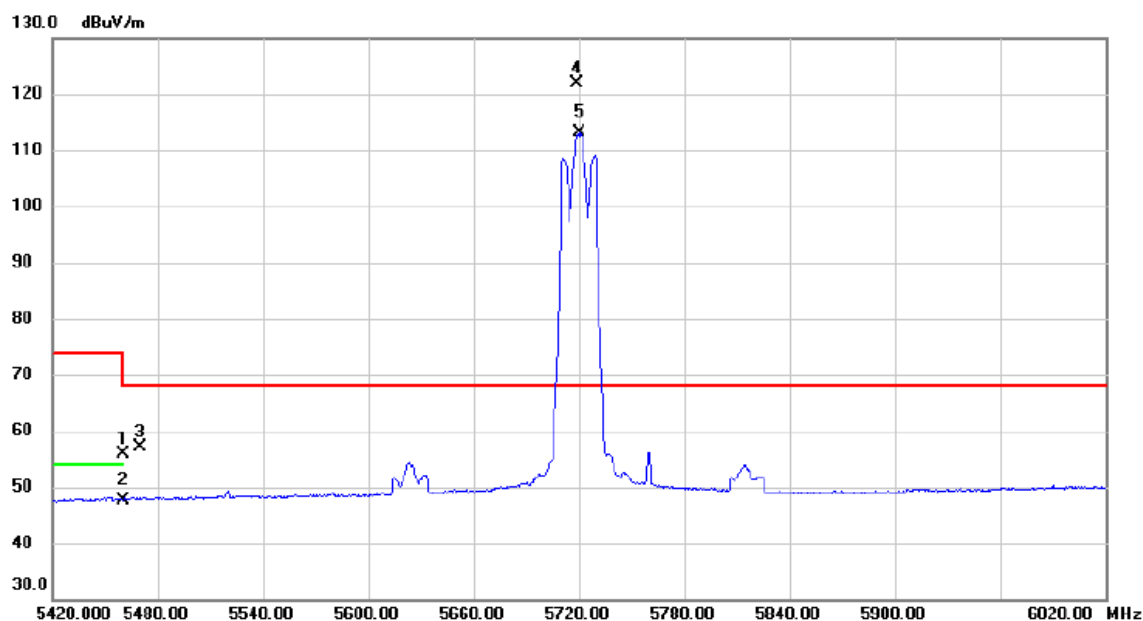


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	40.01	15.79	55.80	74.00	-18.20	peak	
2		5460.000	31.88	15.79	47.67	54.00	-6.33	AVG	
3		5470.000	41.35	15.83	57.18	68.20	-11.02	peak	
4	*	5718.800	105.24	16.67	121.91	68.20	53.71	peak	No Limit
5	X	5720.600	96.37	16.68	113.05	68.20	44.85	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5720 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

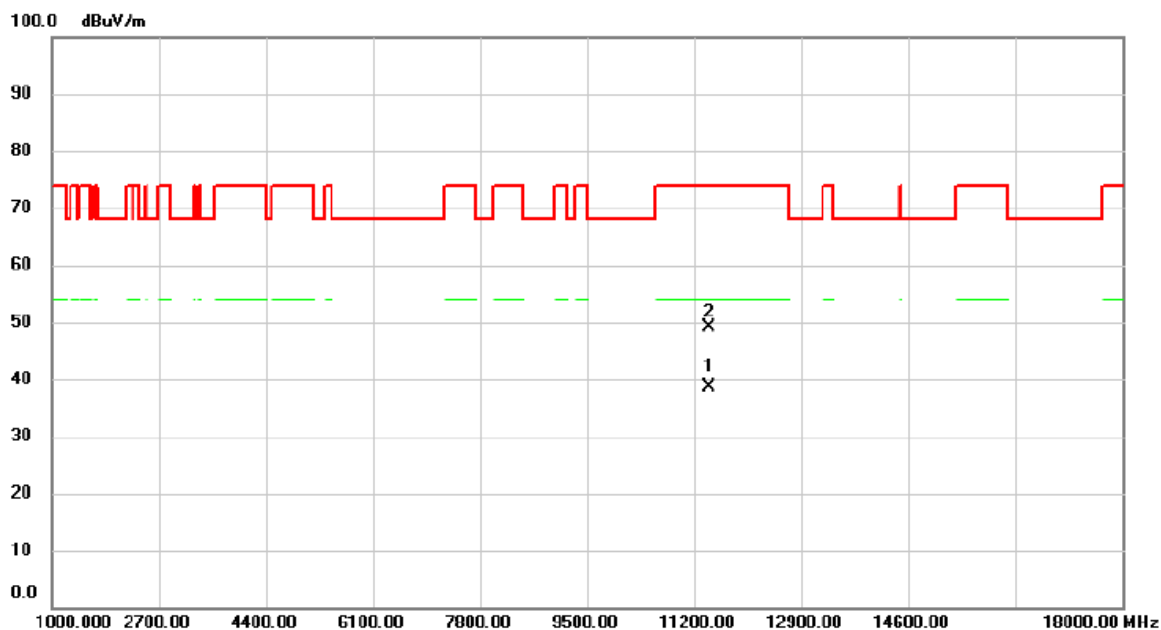


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11440.120	29.50	9.15	38.65	54.00	-15.35	AVG	
2		11440.280	39.98	9.15	49.13	74.00	-24.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5710 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

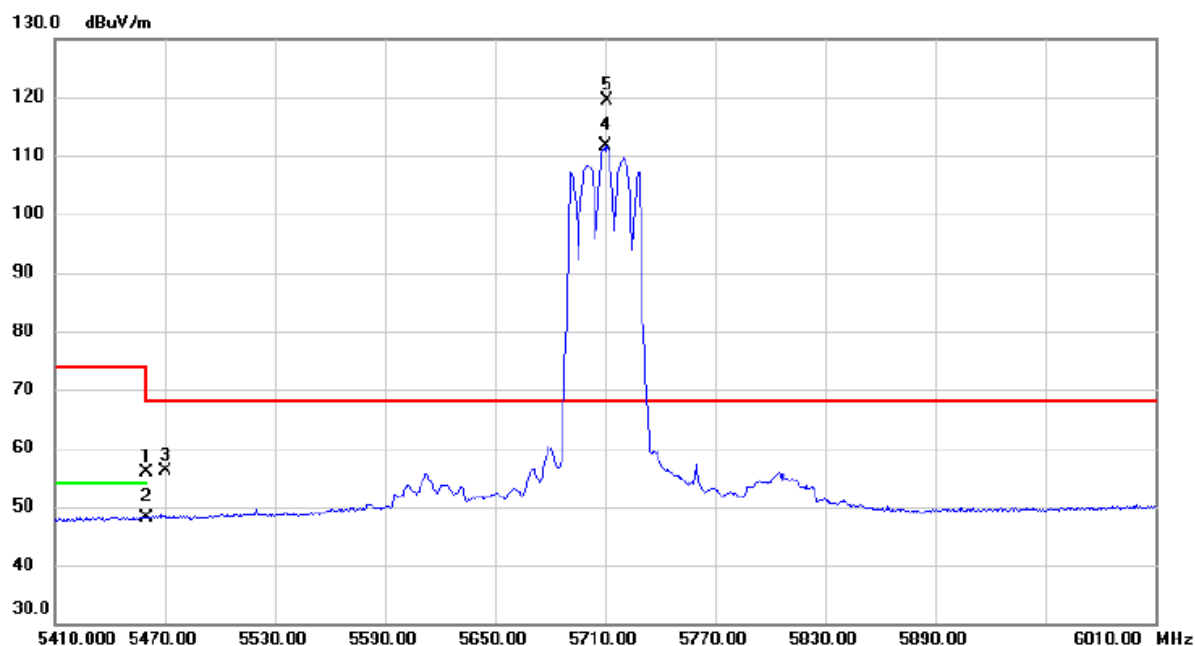


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	40.07	15.79	55.86	74.00	-18.14	peak	
2		5460.000	32.24	15.79	48.03	54.00	-5.97	AVG	
3		5470.000	40.40	15.83	56.23	68.20	-11.97	peak	
4	X	5710.600	95.05	16.65	111.70	68.20	43.50	AVG	No Limit
5	*	5711.200	102.85	16.65	119.50	68.20	51.30	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5710 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

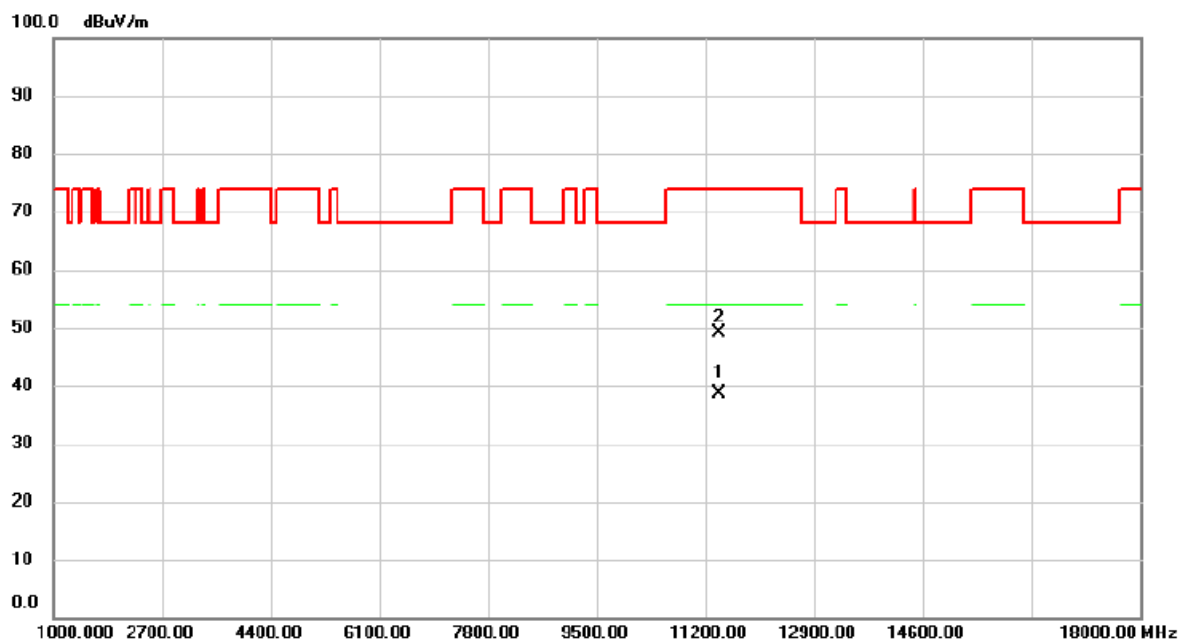


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11411.200	29.36	9.19	38.55	54.00	-15.45	AVG	
2		11421.720	39.83	9.18	49.01	74.00	-24.99	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5690 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

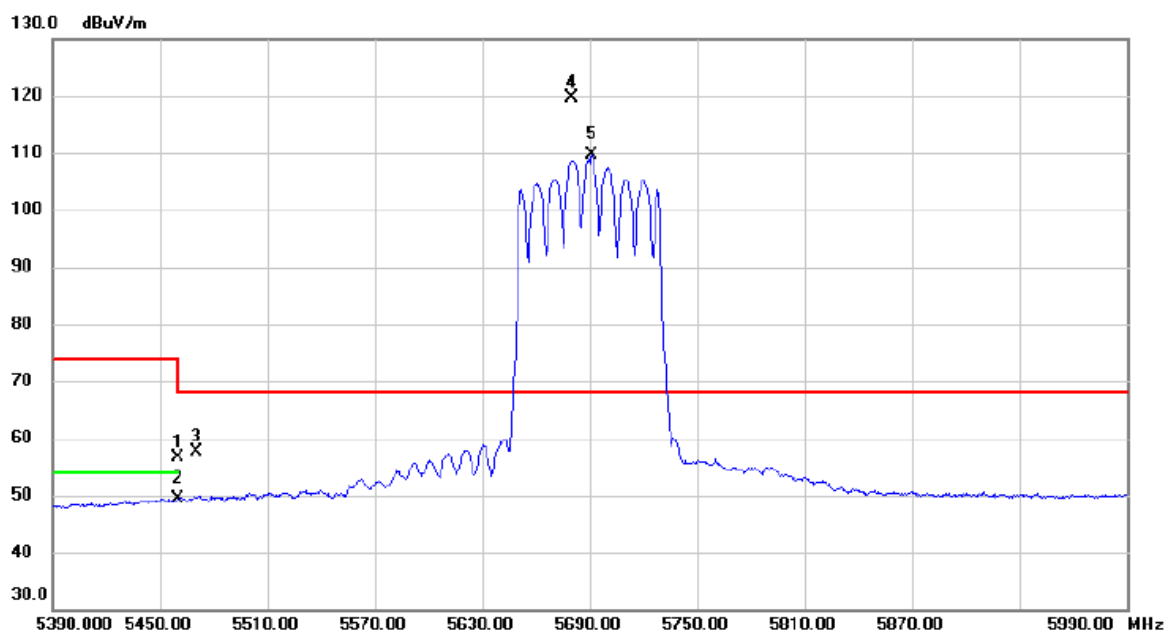


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	40.89	15.79	56.68	74.00	-17.32	peak	
2		5460.000	33.64	15.79	49.43	54.00	-4.57	AVG	
3		5470.000	41.72	15.83	57.55	68.20	-10.65	peak	
4	*	5680.400	103.07	16.53	119.60	68.20	51.40	peak	No Limit
5	X	5691.200	92.95	16.58	109.53	68.20	41.33	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5690 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

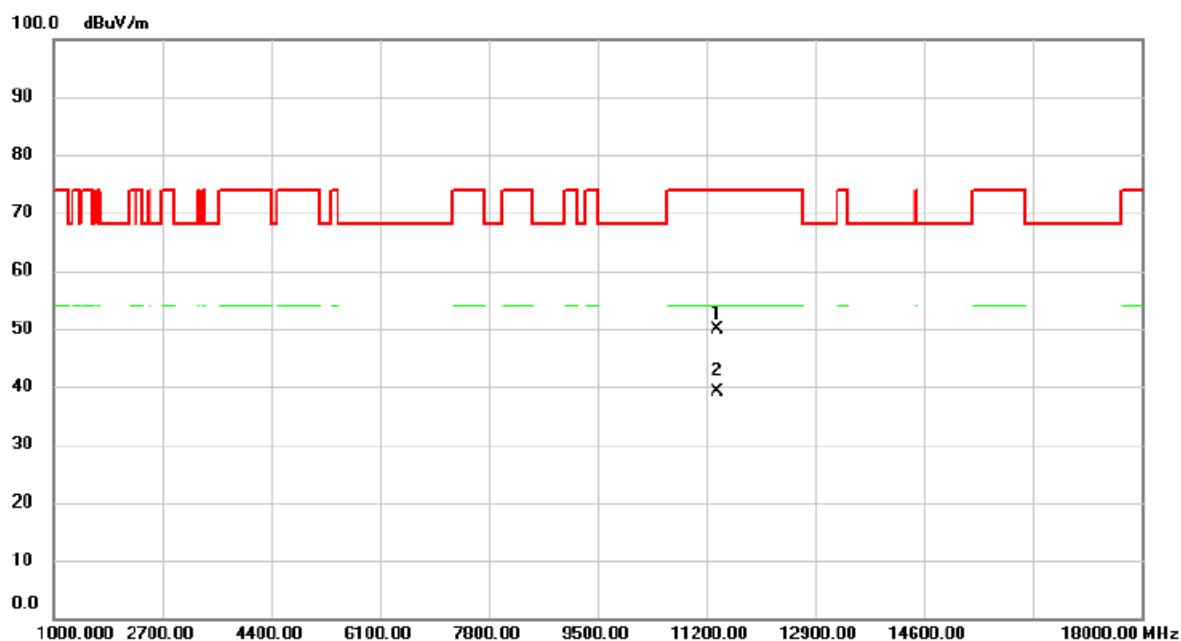


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11379.680	40.70	9.24	49.94	74.00	-24.06	peak	
2	*	11379.840	29.91	9.24	39.15	54.00	-14.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Worst Case:

Test Mode	UNII-2C_TX AX(HE80) Mode 5690 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

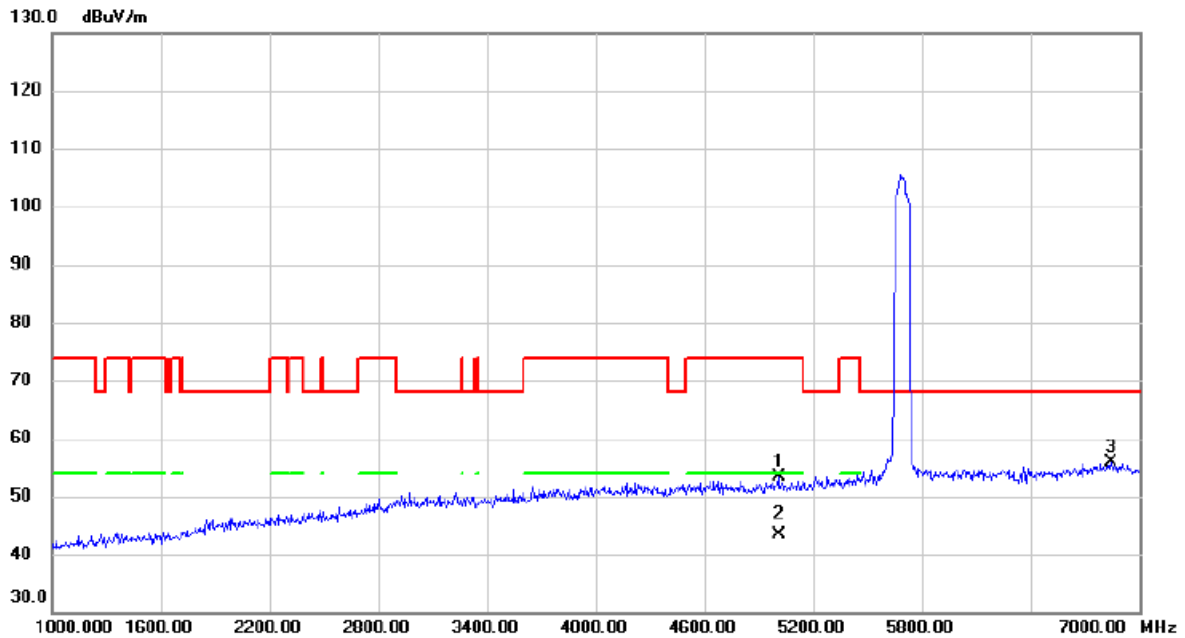


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5008.000	38.85	14.61	53.46	74.00	-20.54	peak	
2	*	5008.000	28.85	14.61	43.46	54.00	-10.54	AVG	
3		6844.000	36.70	19.29	55.99	68.20	-12.21	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5690 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

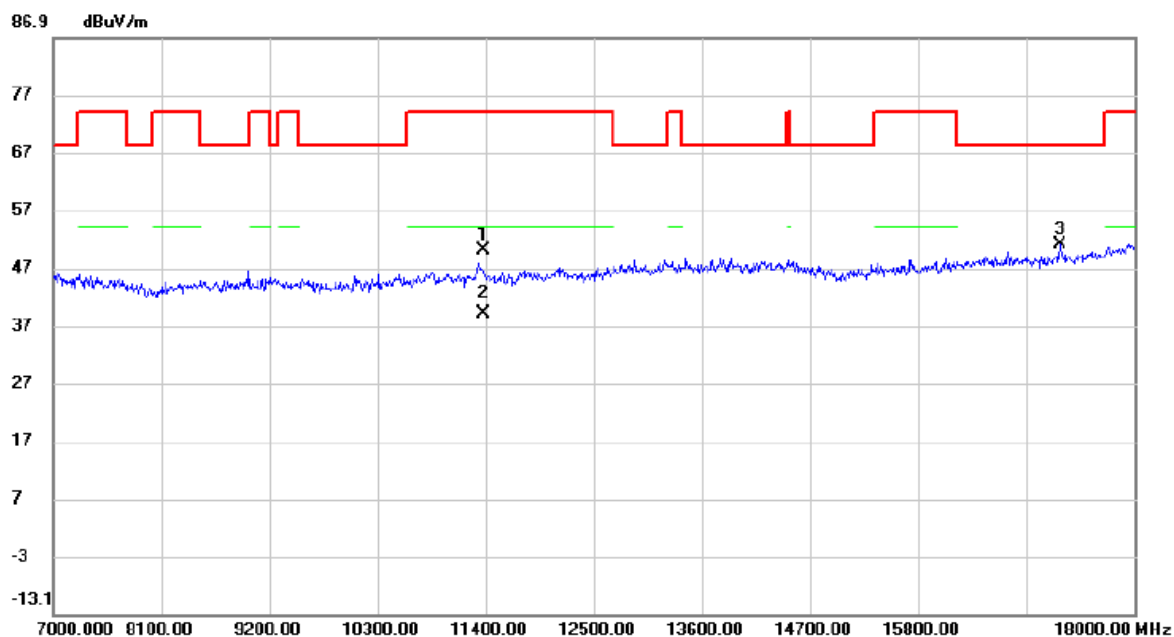


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11379.680	40.70	9.24	49.94	74.00	-24.06	peak	
2	*	11379.680	29.91	9.24	39.15	54.00	-14.85	AVG	
3		17241.000	40.43	10.68	51.11	68.20	-17.09	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

5G_2

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

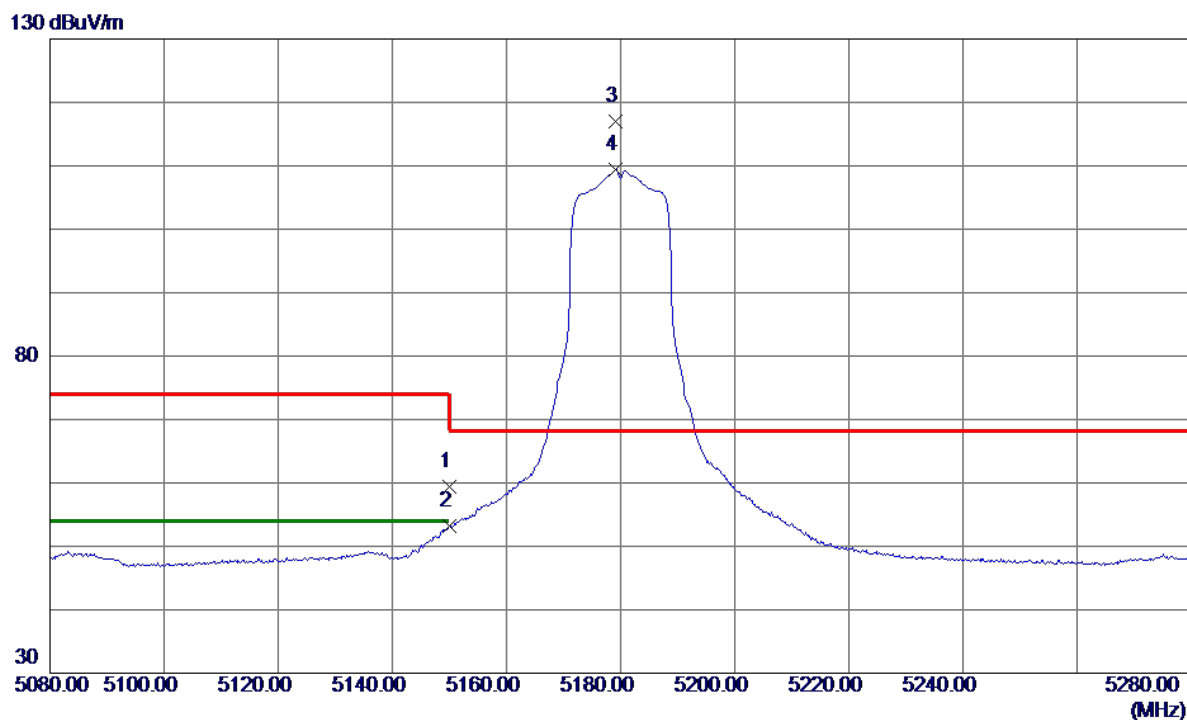


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	44.39	14.98	59.37	74.00	-14.63	Peak	
2	5150.0000	38.29	14.98	53.27	54.00	-0.73	AVG	
3 *	5179.2000	101.86	15.05	116.91	68.20	48.71	Peak	No Limit
4	5179.2000	94.43	15.05	109.48	999.00	-889.52	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

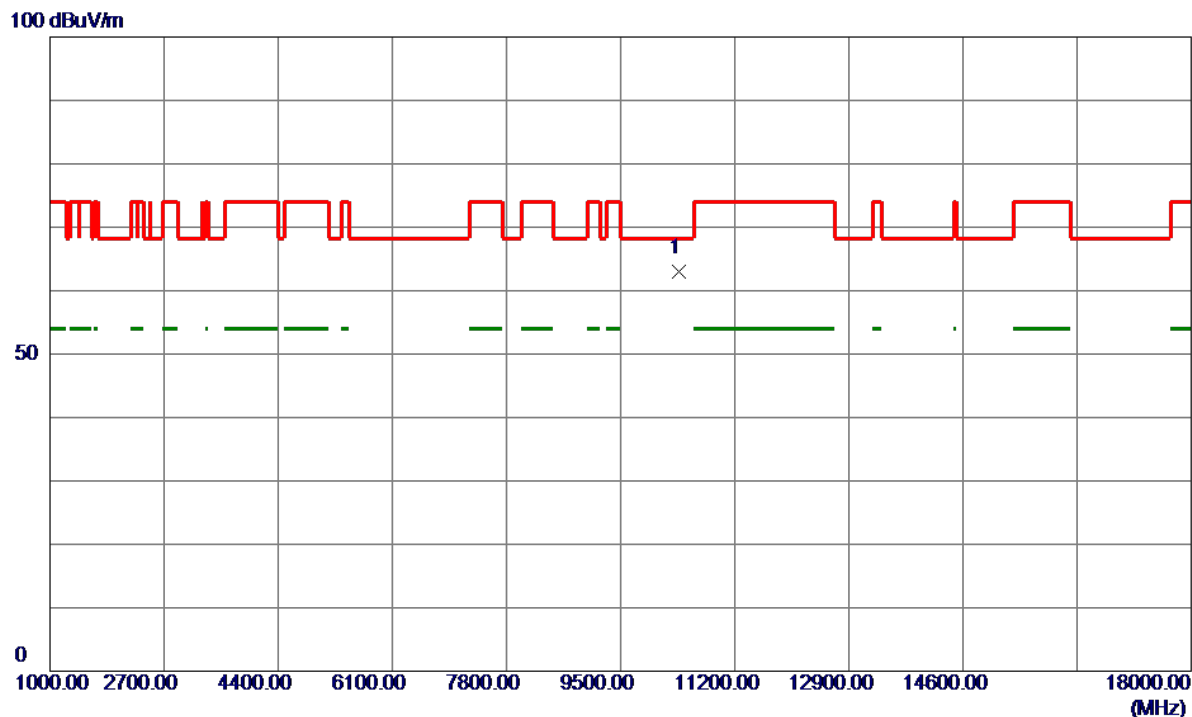


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10362.8500	54.09	8.81	62.90	68.20	-5.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

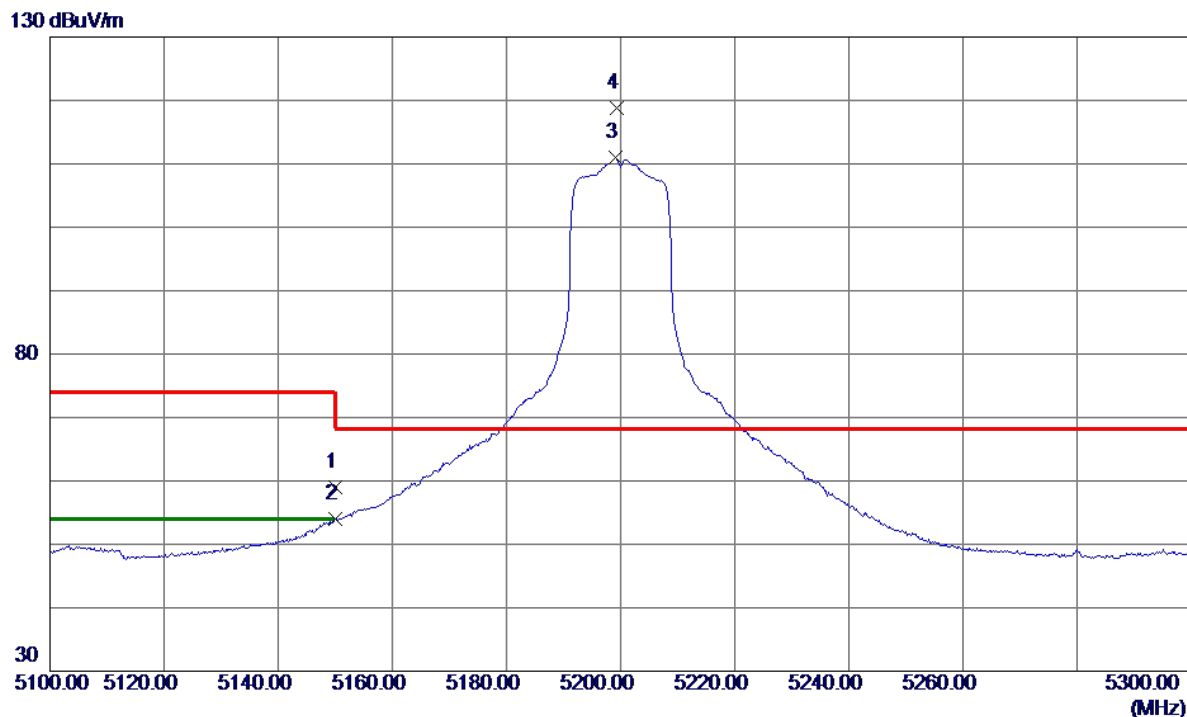


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	44.02	14.98	59.00	74.00	-15.00	Peak	
2	5150.0000	38.99	14.98	53.97	54.00	-0.03	AVG	
3	5199.2000	95.99	15.11	111.10	999.00	-887.90	AVG	No Limit
4 *	5199.4000	103.71	15.11	118.82	68.20	50.62	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

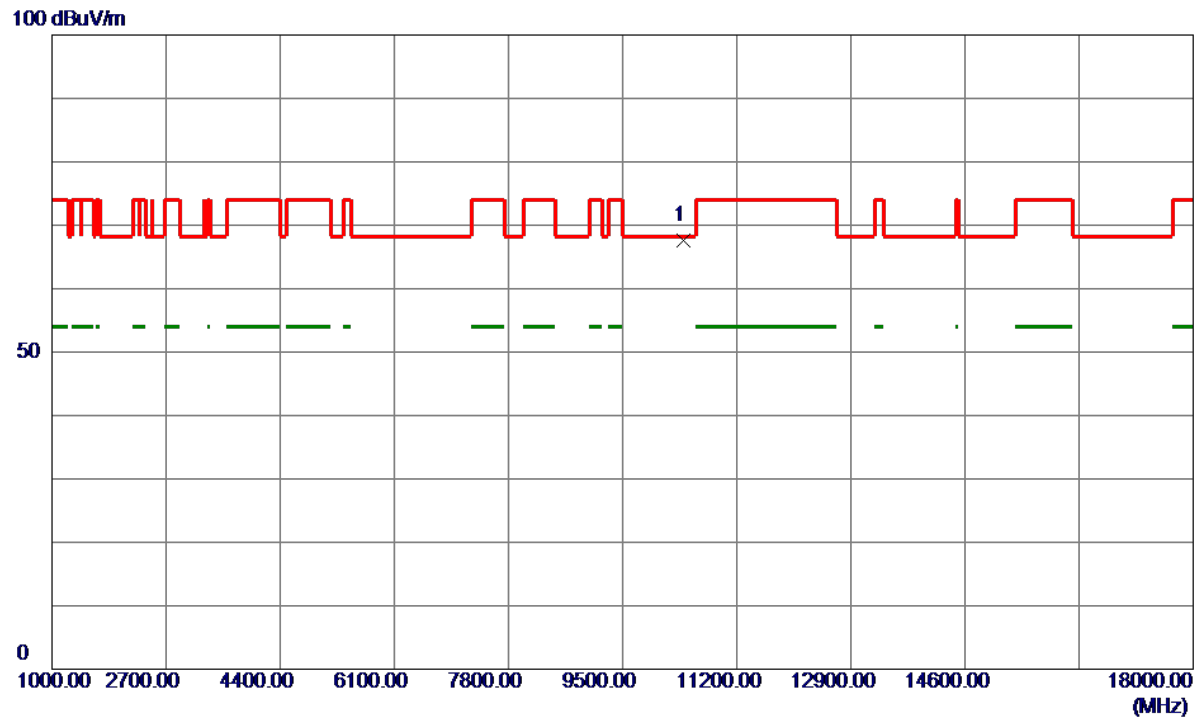


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10401.7400	58.63	8.89	67.52	68.20	-0.68	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

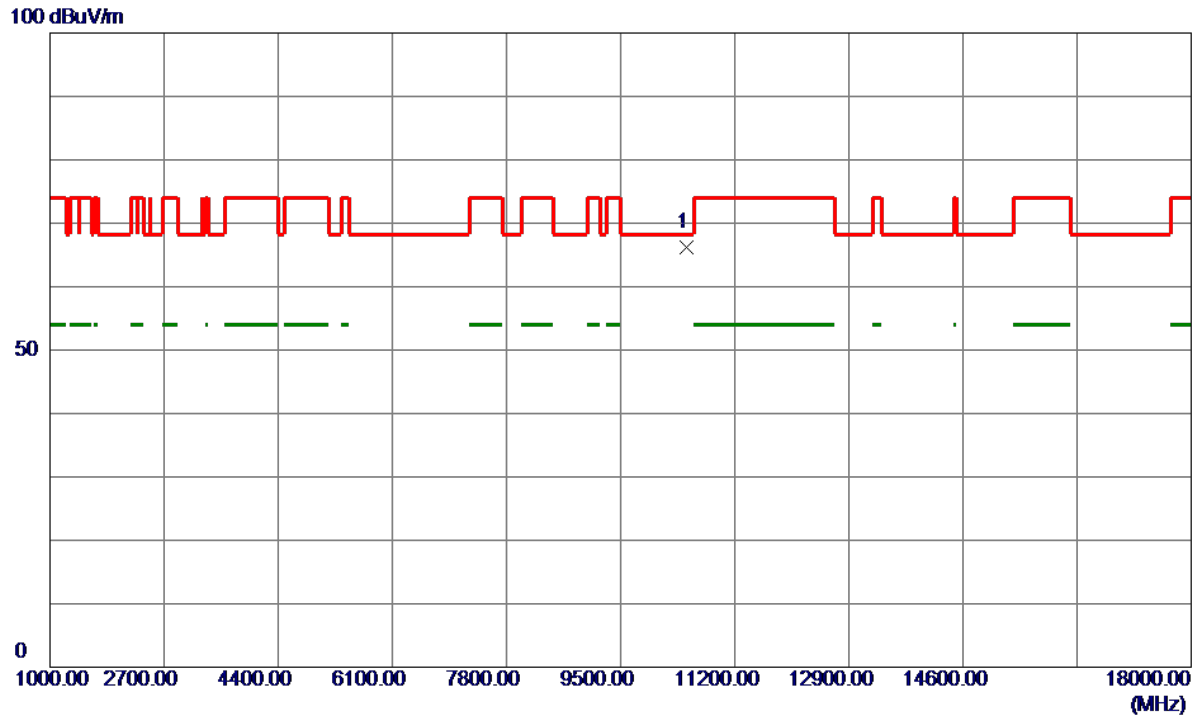


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10481.5300	57.18	9.03	66.21	68.20	-1.99	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

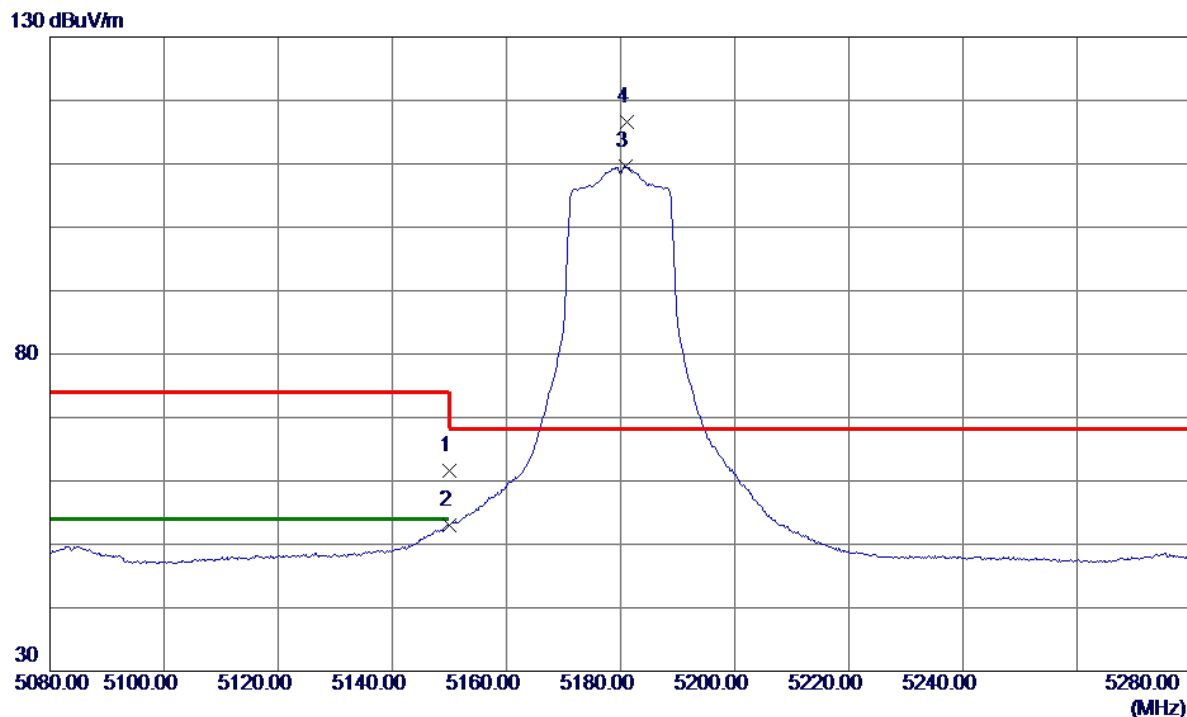


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	46.71	14.98	61.69	74.00	-12.31	Peak	
2	5150.0000	38.05	14.98	53.03	54.00	-0.97	AVG	
3	5180.8000	94.45	15.06	109.51	999.00	-889.49	AVG	No Limit
4 *	5181.2000	101.62	15.06	116.68	68.20	48.48	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

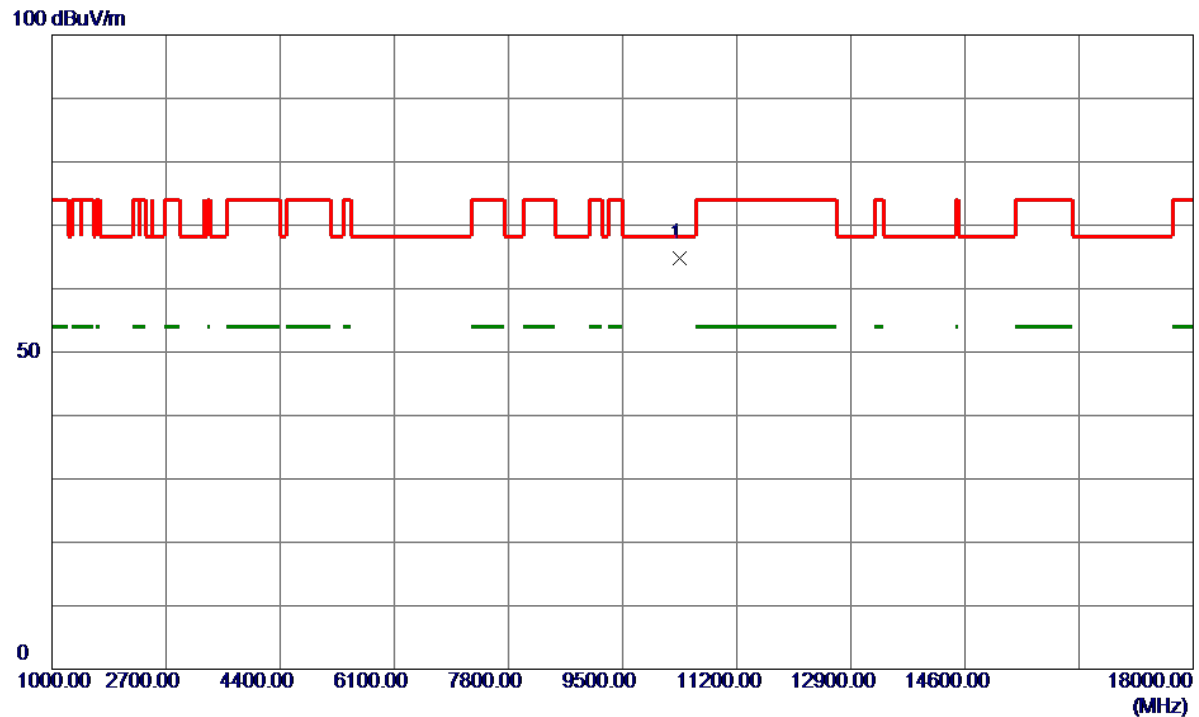


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10357.8000	55.96	8.80	64.76	68.20	-3.44	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

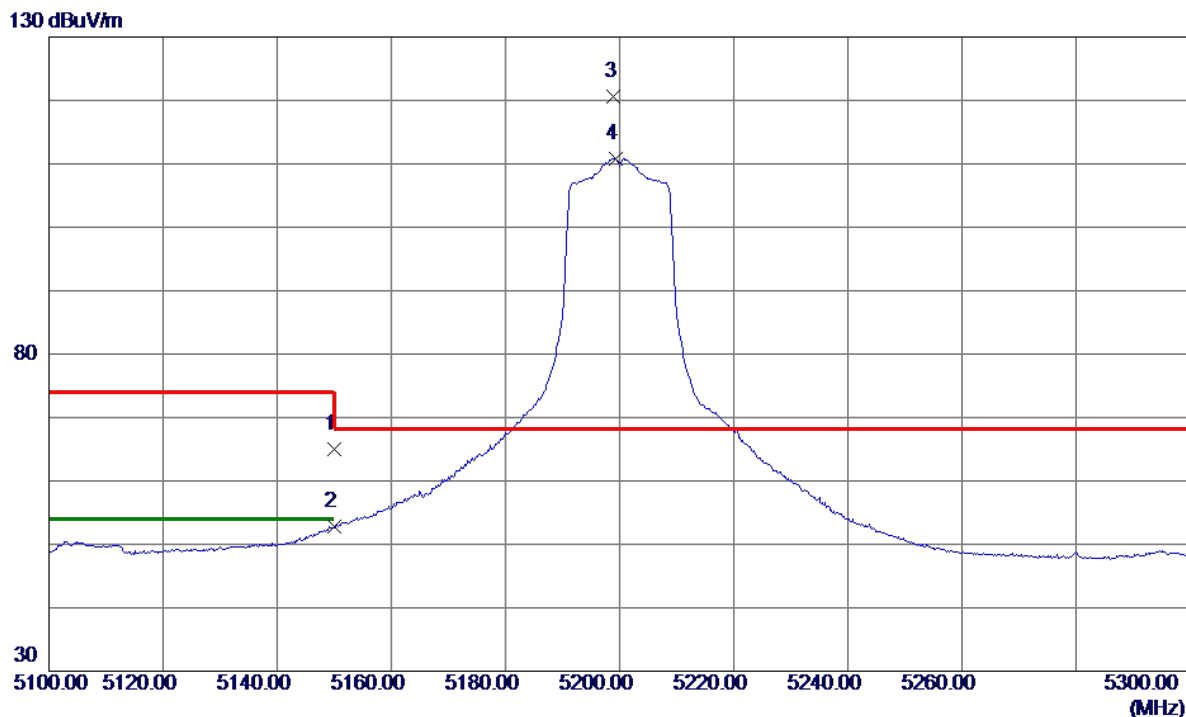


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	49.97	14.98	64.95	74.00	-9.05	Peak	
2	5150.0000	37.79	14.98	52.77	54.00	-1.23	AVG	
3 *	5199.0000	105.41	15.11	120.52	68.20	52.32	Peak	No Limit
4	5199.4000	95.78	15.11	110.89	999.00	-888.11	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

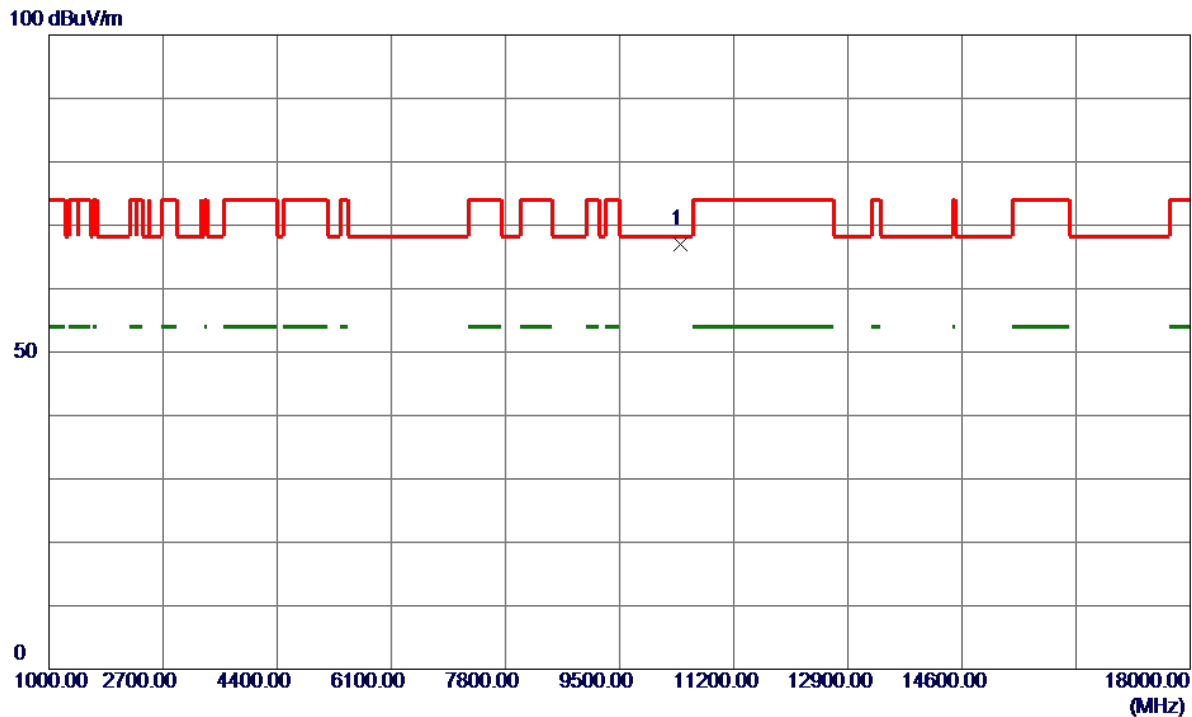


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10399.2400	58.06	8.88	66.94	68.20	-1.26	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

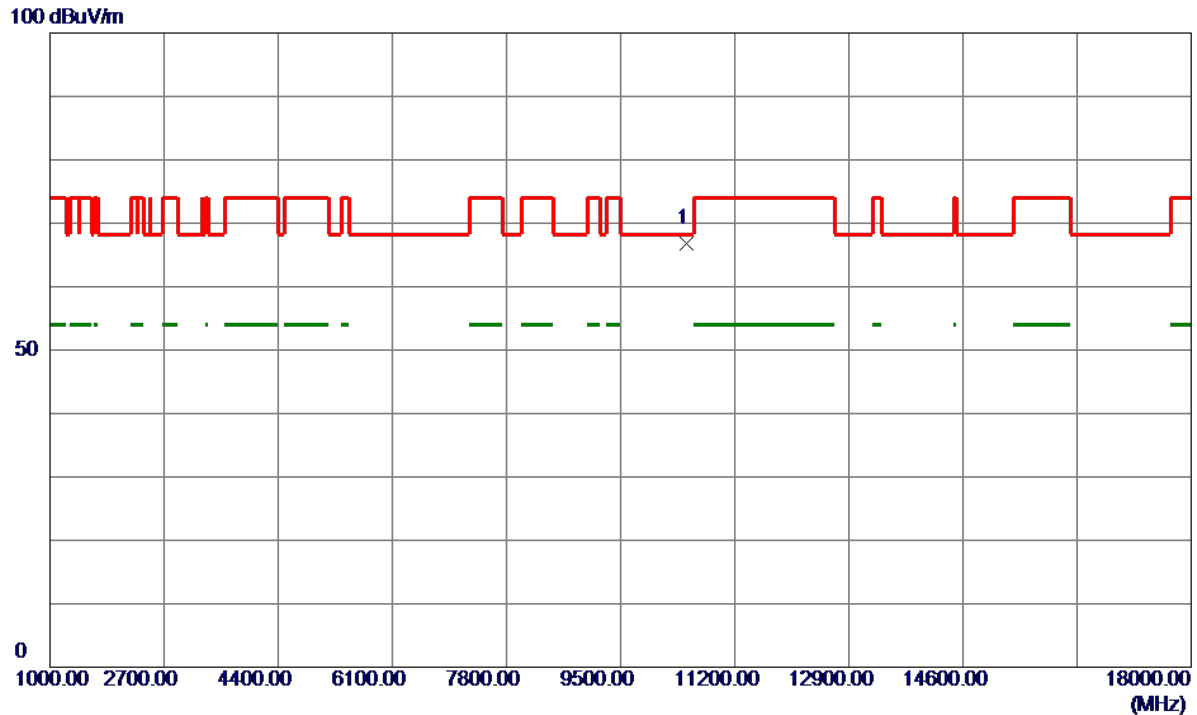


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10482.6400	57.75	9.03	66.78	68.20	-1.42	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

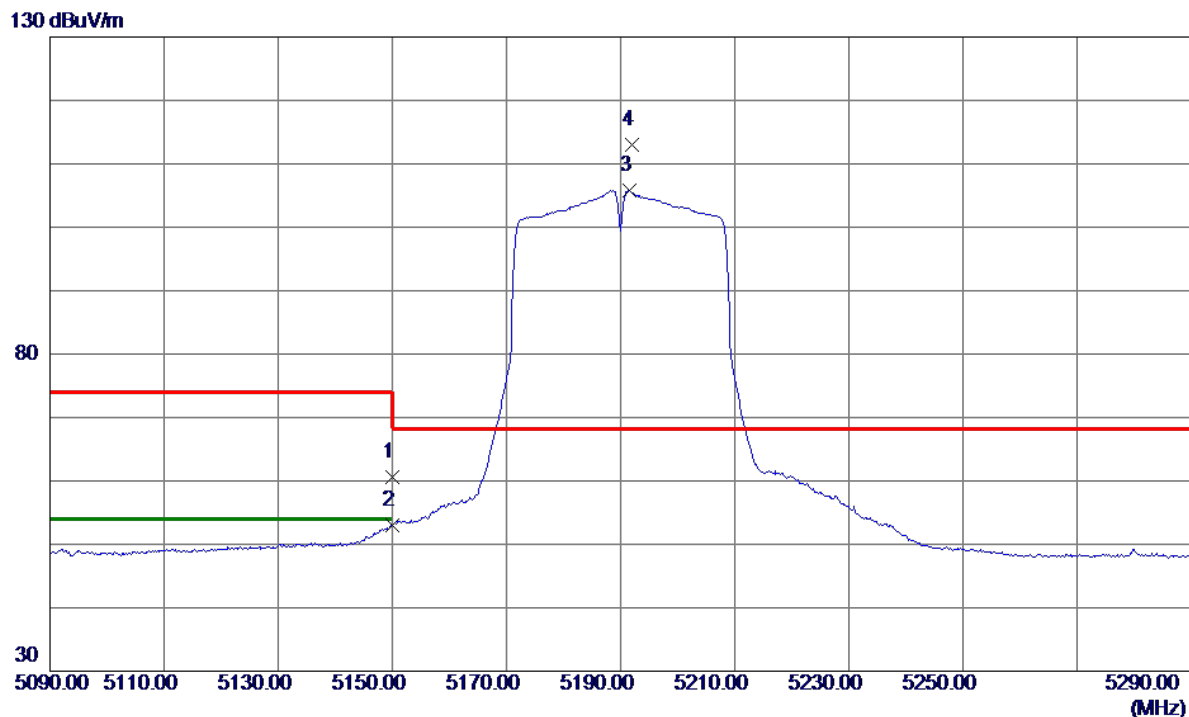


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	45.66	14.98	60.64	74.00	-13.36	Peak	
2	5150.0000	38.10	14.98	53.08	54.00	-0.92	AVG	
3	5191.6000	90.72	15.09	105.81	999.00	-893.19	AVG	No Limit
4 *	5192.0000	97.85	15.09	112.94	68.20	44.74	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

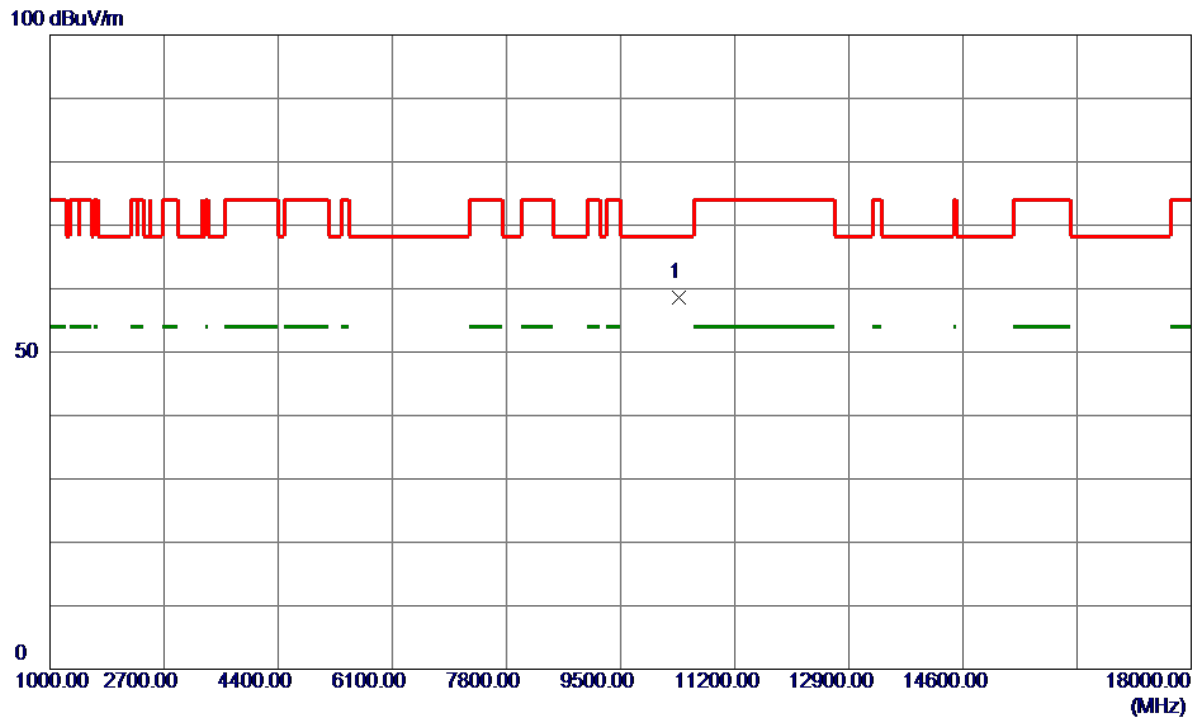


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10376.6400	49.75	8.84	58.59	68.20	-9.61	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

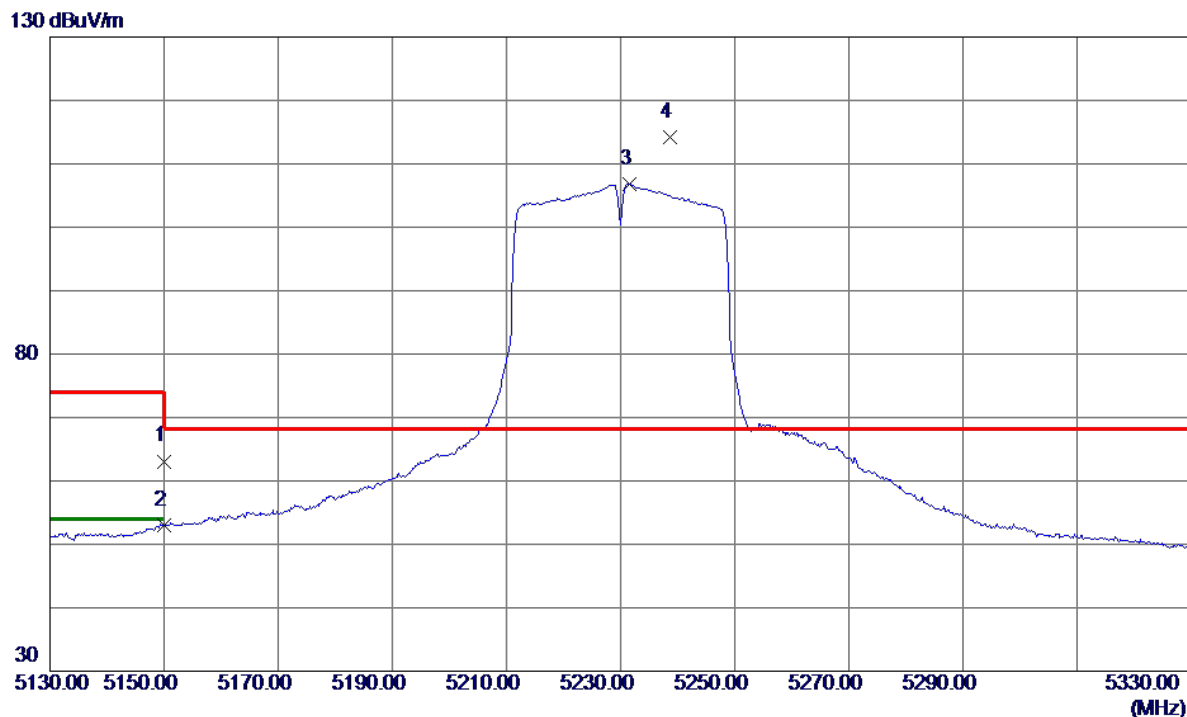


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	48.12	14.98	63.10	74.00	-10.90	Peak	
2	5150.0000	38.02	14.98	53.00	54.00	-1.00	AVG	
3	5231.6000	91.57	15.19	106.76	999.00	-892.24	AVG	No Limit
4 *	5238.6000	99.00	15.21	114.21	68.20	46.01	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

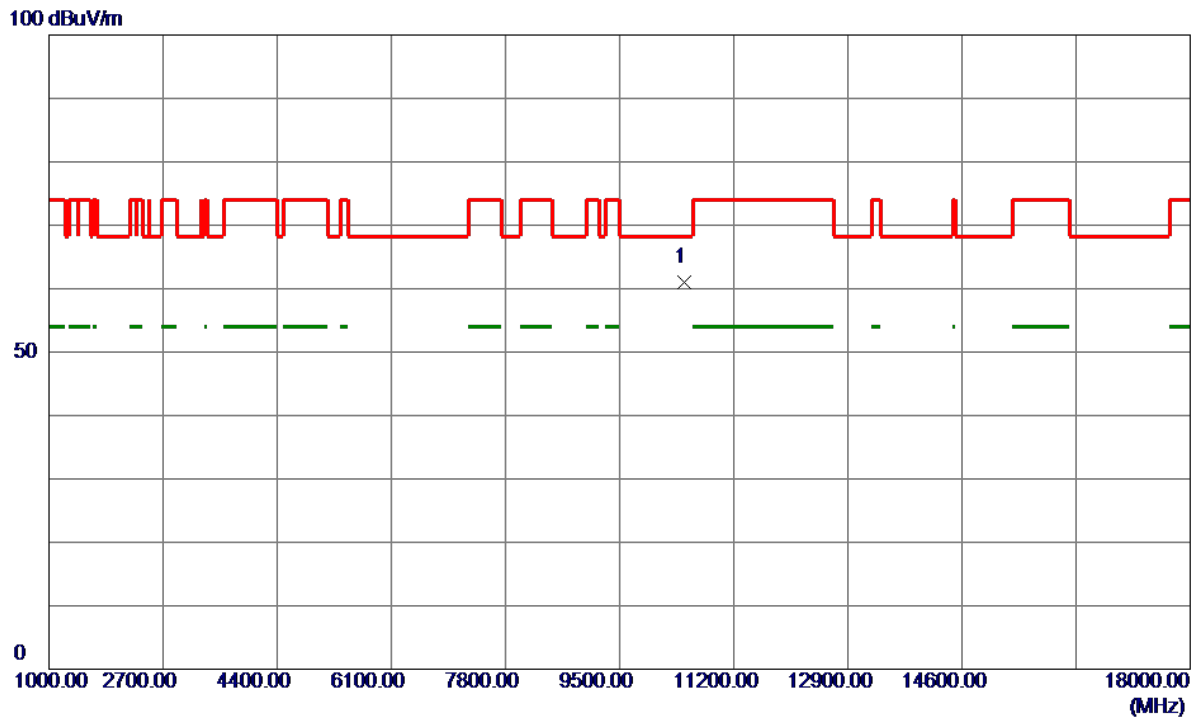


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10458.5300	51.92	8.99	60.91	68.20	-7.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

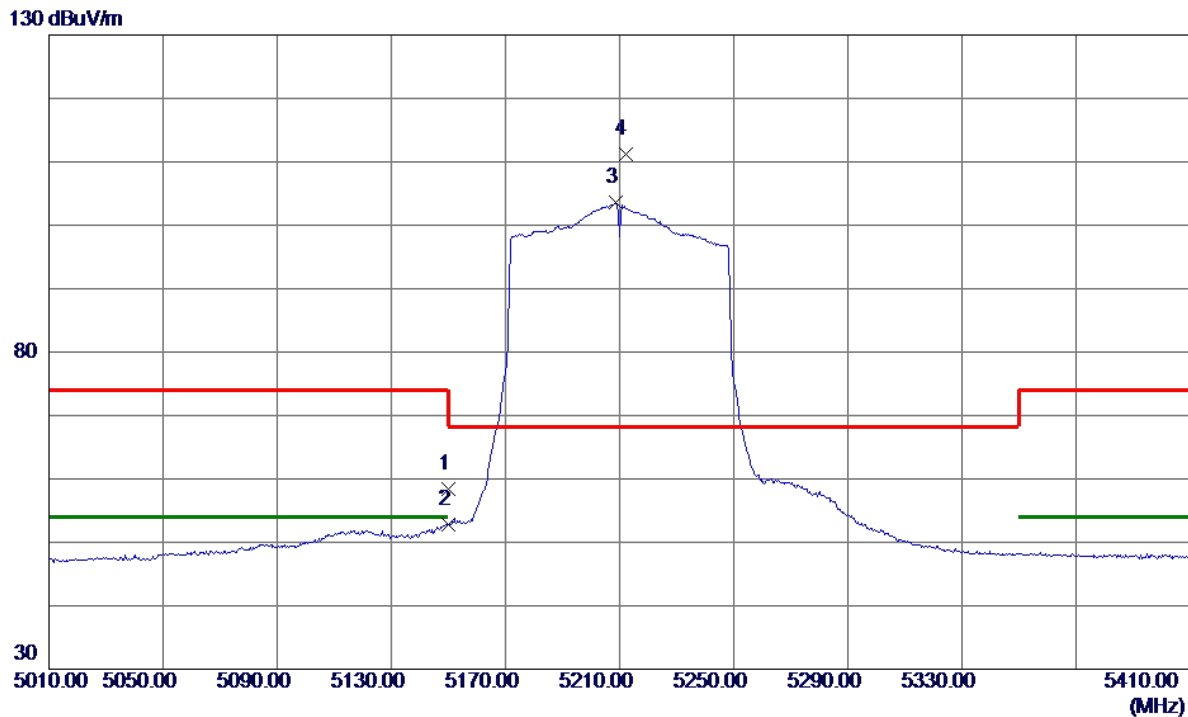


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	43.49	14.98	58.47	74.00	-15.53	Peak	
2	5150.0000	37.79	14.98	52.77	54.00	-1.23	AVG	
3	5208.8000	88.47	15.13	103.60	999.00	-895.40	AVG	No Limit
4 *	5212.0000	96.03	15.14	111.17	68.20	42.97	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

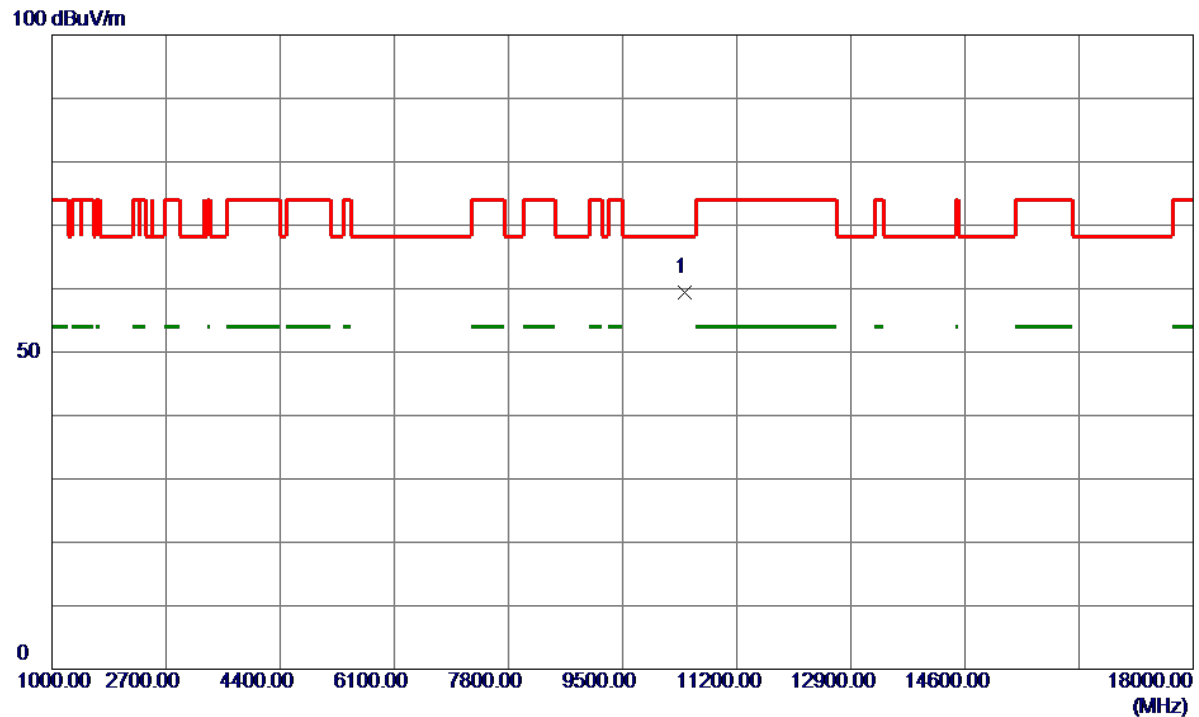


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10416.3500	50.51	8.91	59.42	68.20	-8.78	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5180 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

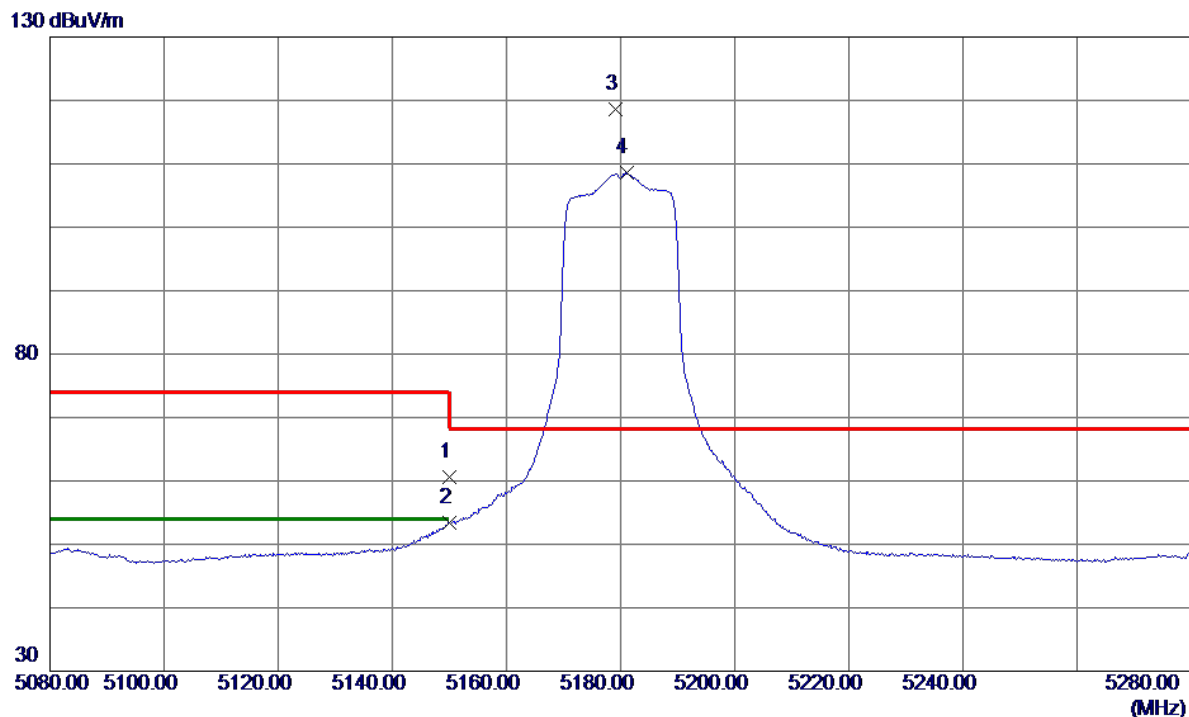


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	45.65	14.98	60.63	74.00	-13.37	Peak	
2	5150.0000	38.37	14.98	53.35	54.00	-0.65	AVG	
3 *	5179.2000	103.54	15.05	118.59	68.20	50.39	Peak	No Limit
4	5181.0000	93.45	15.06	108.51	999.00	-890.49	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5180 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

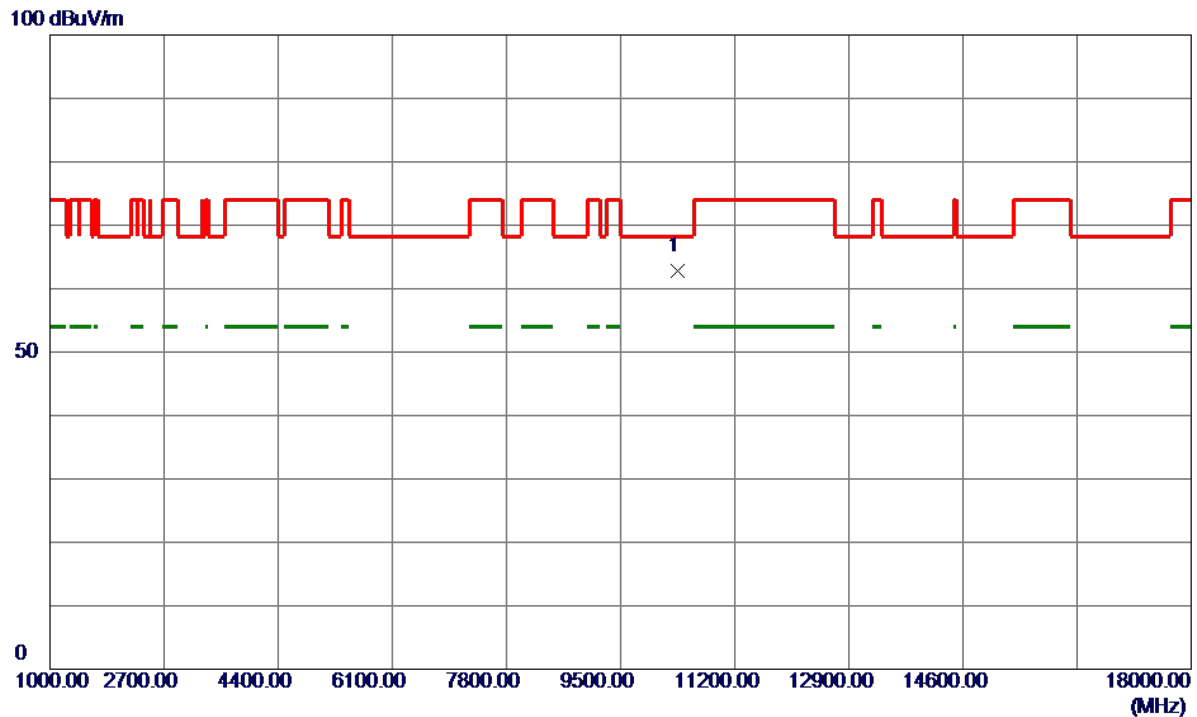


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10356.5800	53.94	8.80	62.74	68.20	-5.46	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5200 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

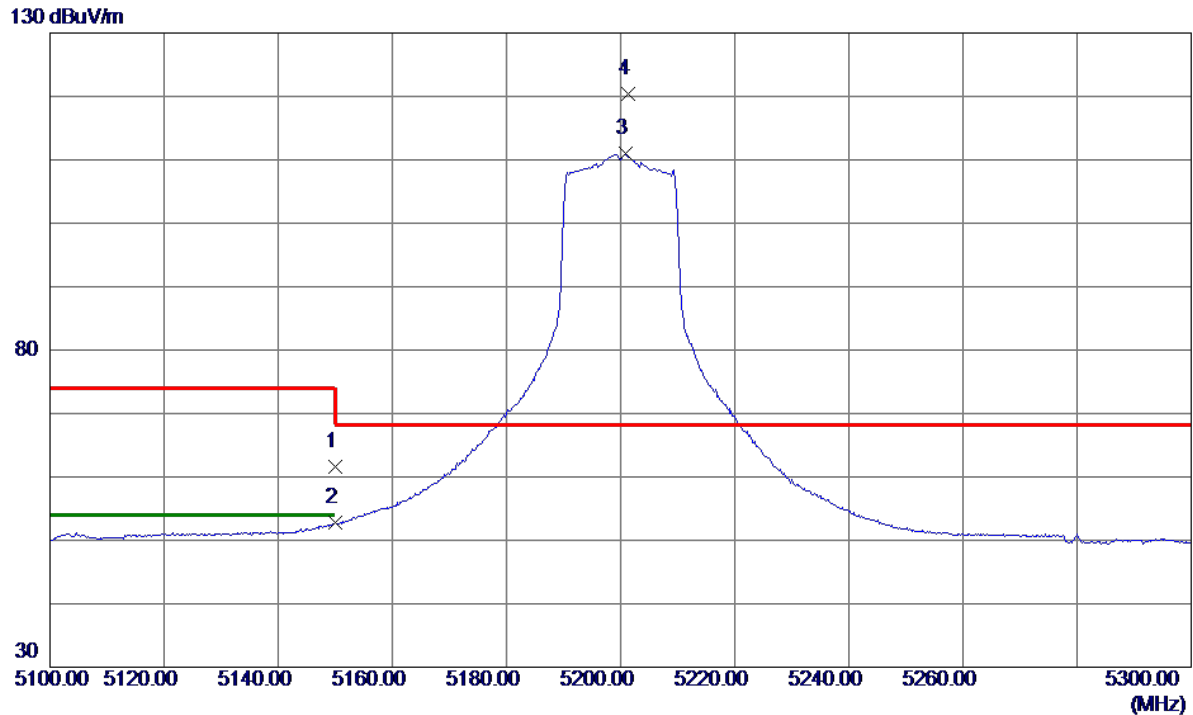


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	46.61	14.98	61.59	74.00	-12.41	Peak	
2	5150.0000	37.74	14.98	52.72	54.00	-1.28	AVG	
3	5200.8000	95.84	15.11	110.95	999.00	-888.05	AVG	No Limit
4 *	5201.4000	105.38	15.11	120.49	68.20	52.29	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5200 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

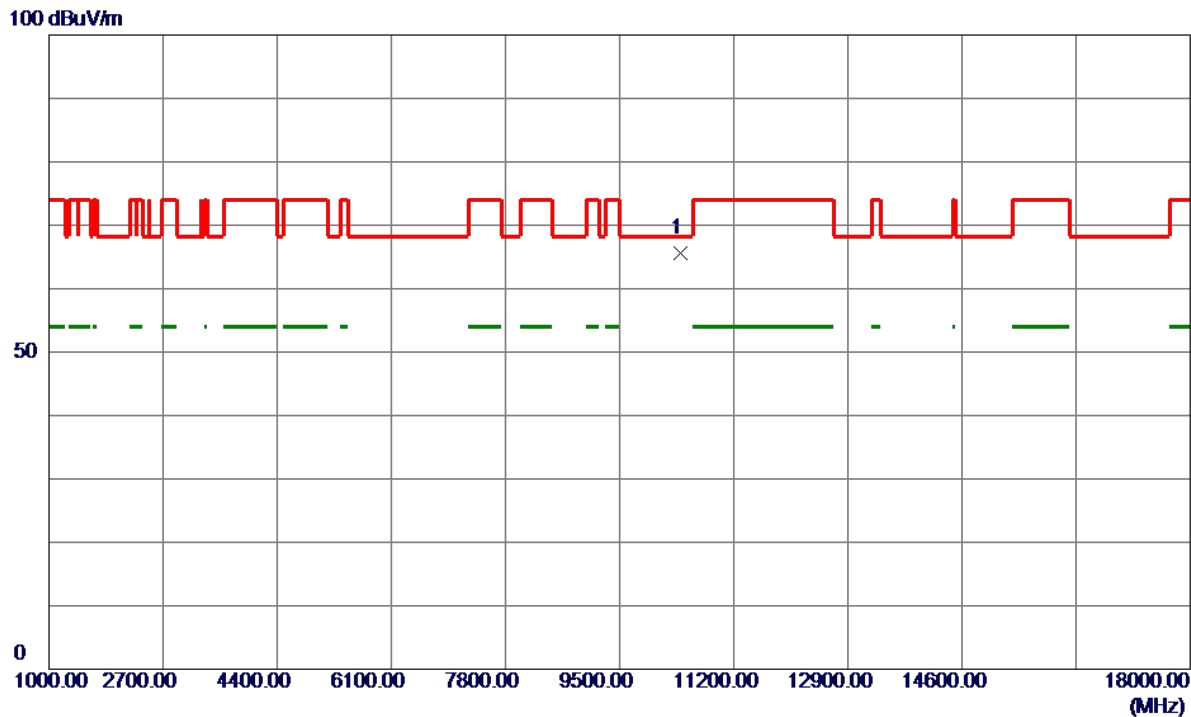


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10399.2800	56.71	8.88	65.59	68.20	-2.61	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5240 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

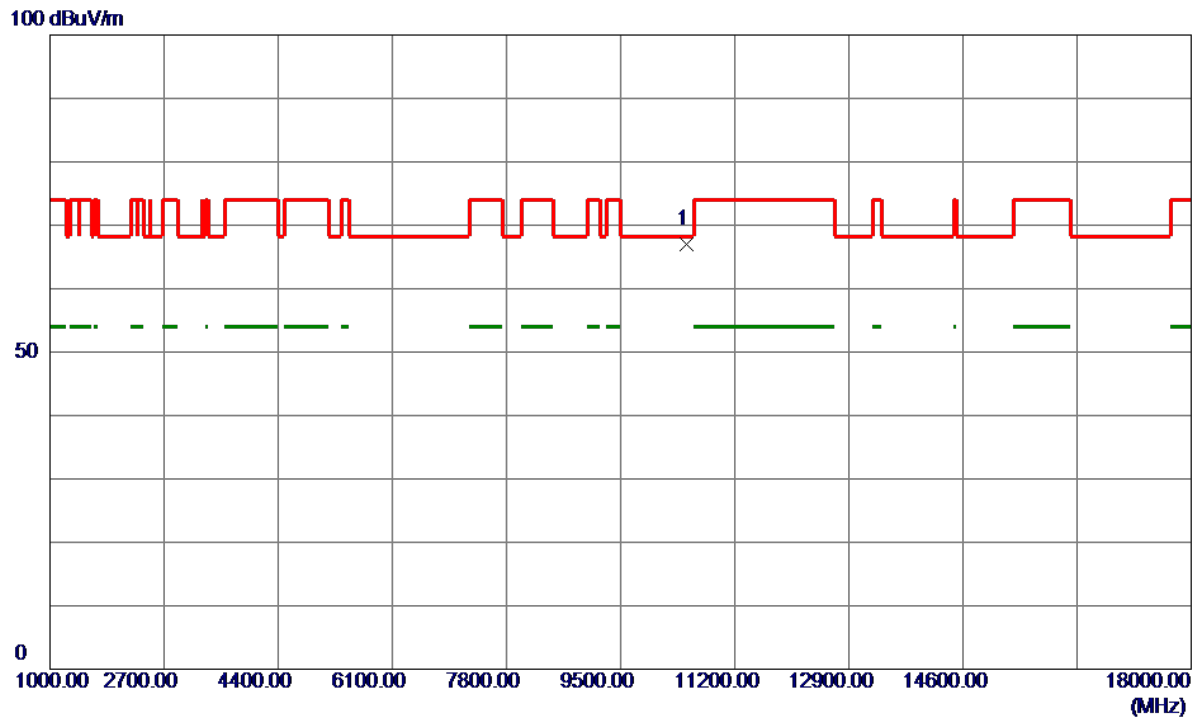


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10482.4900	57.93	9.03	66.96	68.20	-1.24	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5190 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

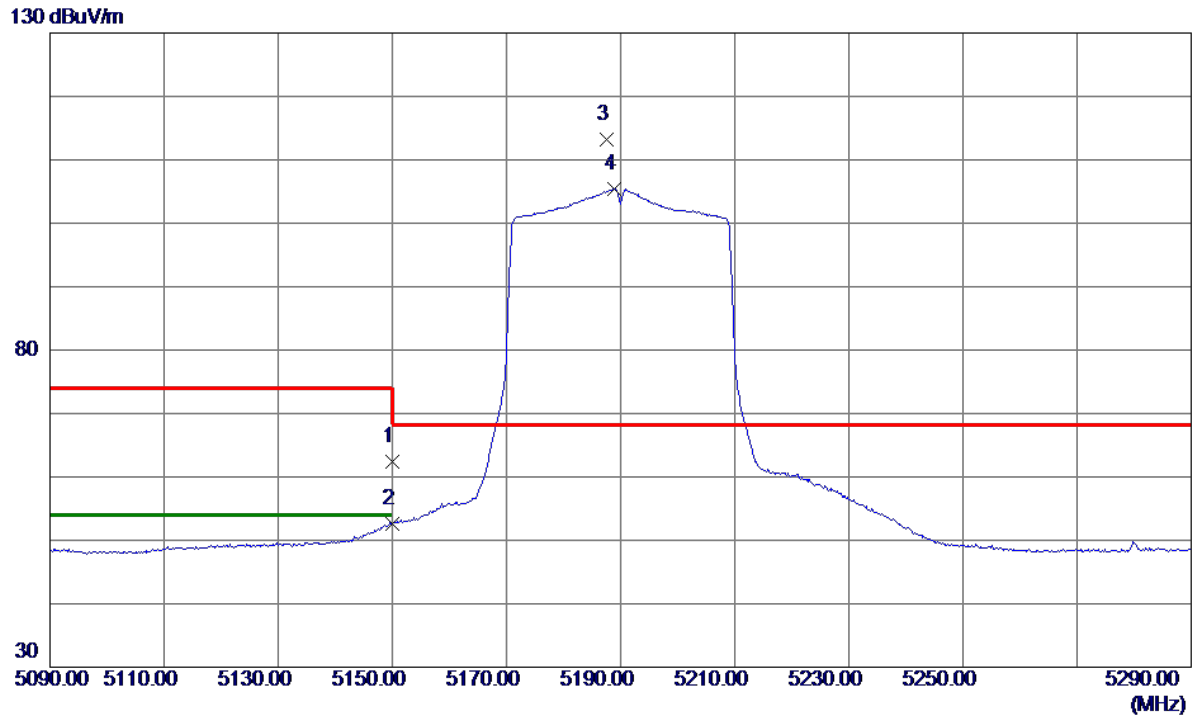


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	47.46	14.98	62.44	74.00	-11.56	Peak	
2	5150.0000	37.66	14.98	52.64	54.00	-1.36	AVG	
3 *	5187.6000	98.10	15.08	113.18	68.20	44.98	Peak	No Limit
4	5188.8000	90.40	15.08	105.48	999.00	-893.52	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5190 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

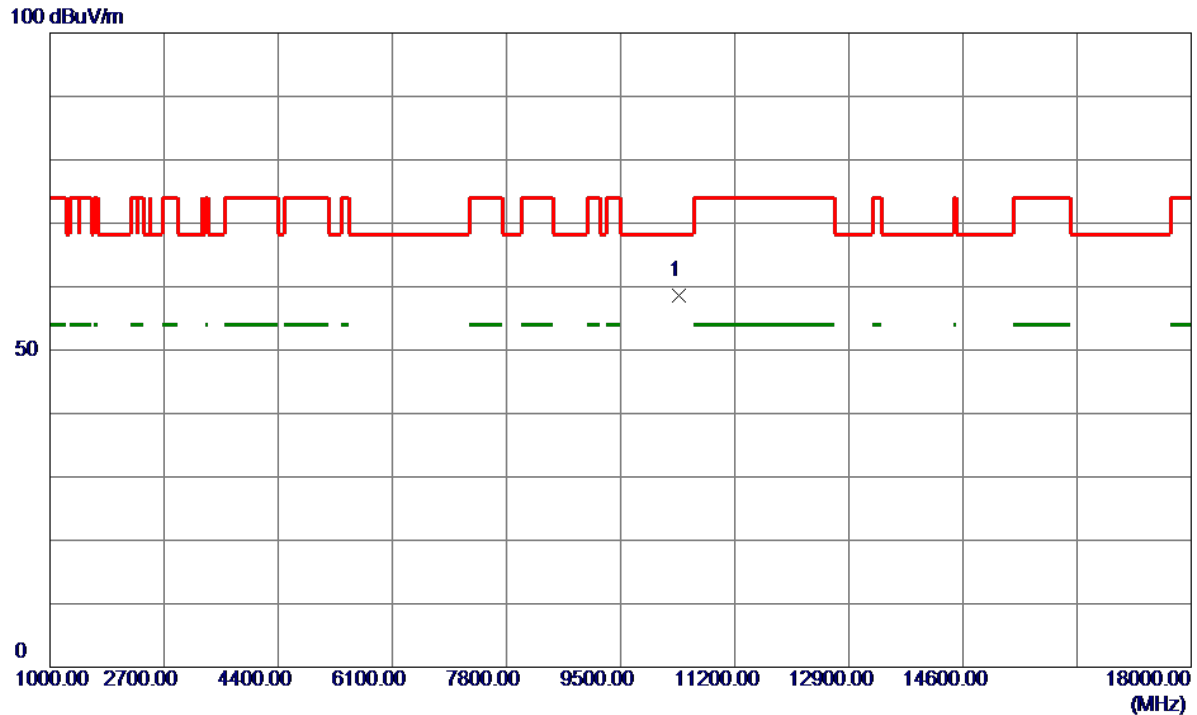


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10377.1600	49.69	8.84	58.53	68.20	-9.67	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5230 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

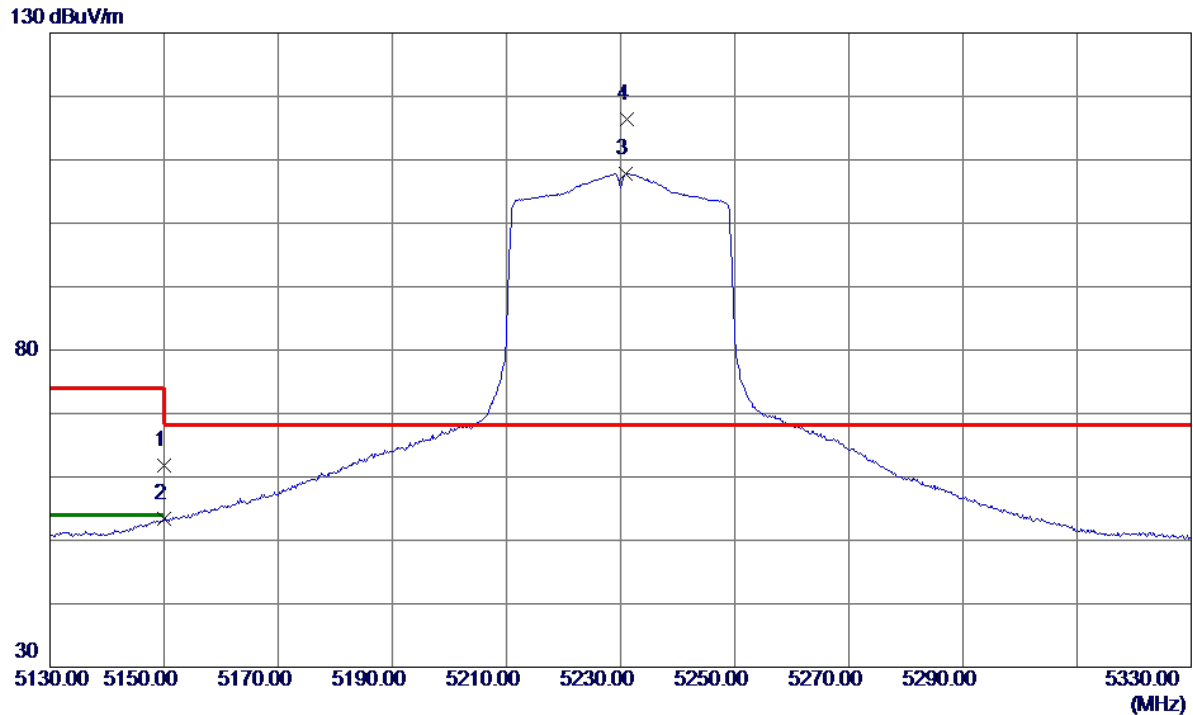


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	46.88	14.98	61.86	74.00	-12.14	Peak	
2	5150.0000	38.42	14.98	53.40	54.00	-0.60	AVG	
3	5230.8000	92.64	15.19	107.83	999.00	-891.17	AVG	No Limit
4 *	5231.2000	101.23	15.19	116.42	68.20	48.22	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5230 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

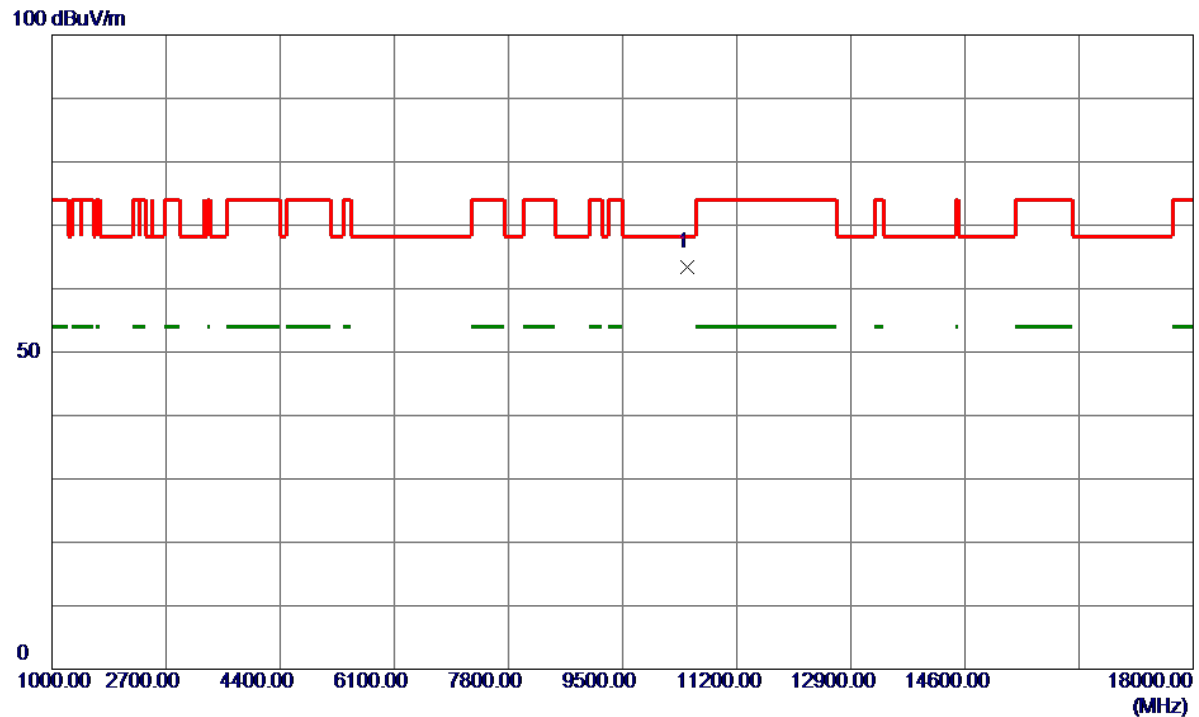


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10454.9200	54.46	8.98	63.44	68.20	-4.76	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE80) Mode 5210 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

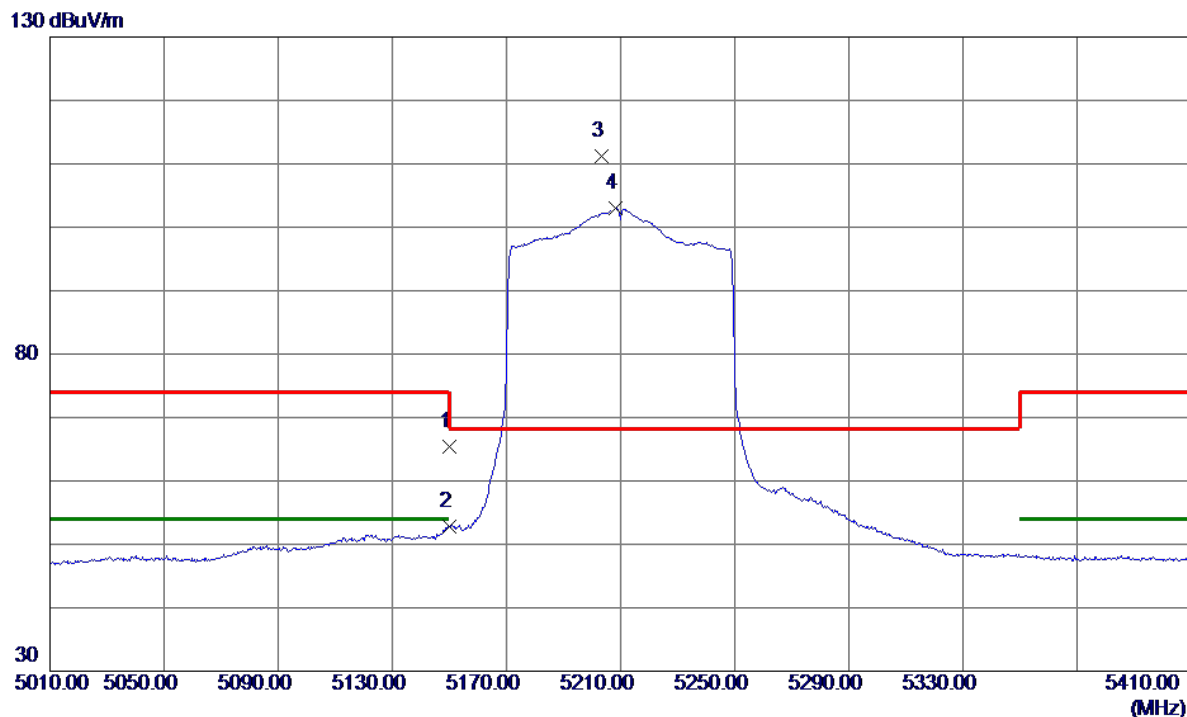


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	50.40	14.98	65.38	74.00	-8.62	Peak	
2	5150.0000	37.83	14.98	52.81	54.00	-1.19	AVG	
3 *	5203.2000	96.04	15.12	111.16	68.20	42.96	Peak	No Limit
4	5208.4000	87.85	15.13	102.98	999.00	-896.02	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE80) Mode 5210 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

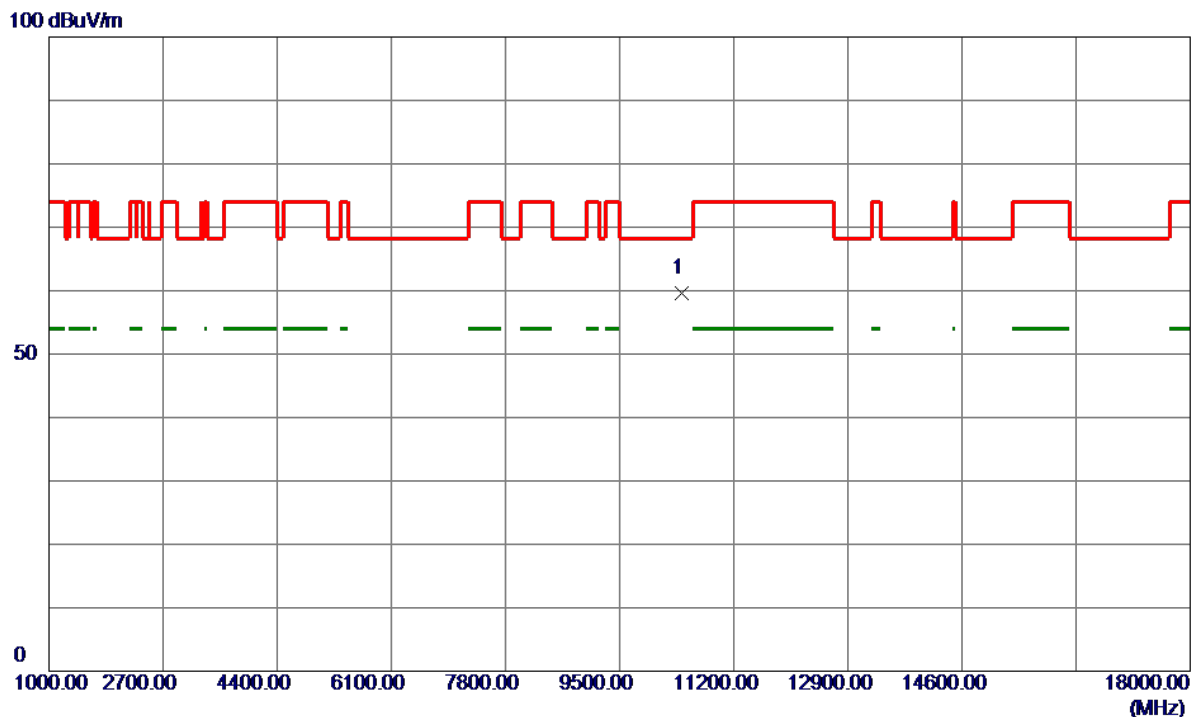


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10416.8000	50.73	8.91	59.64	68.20	-8.56	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

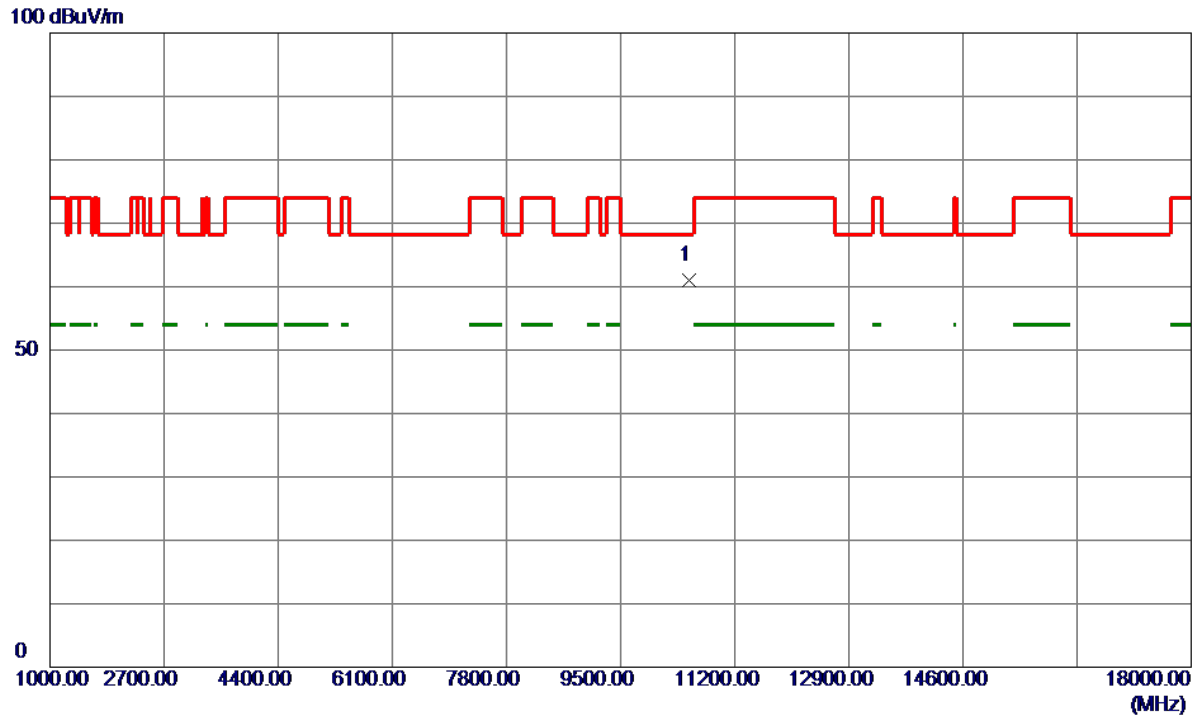


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10521.8300	51.94	9.10	61.04	68.20	-7.16	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

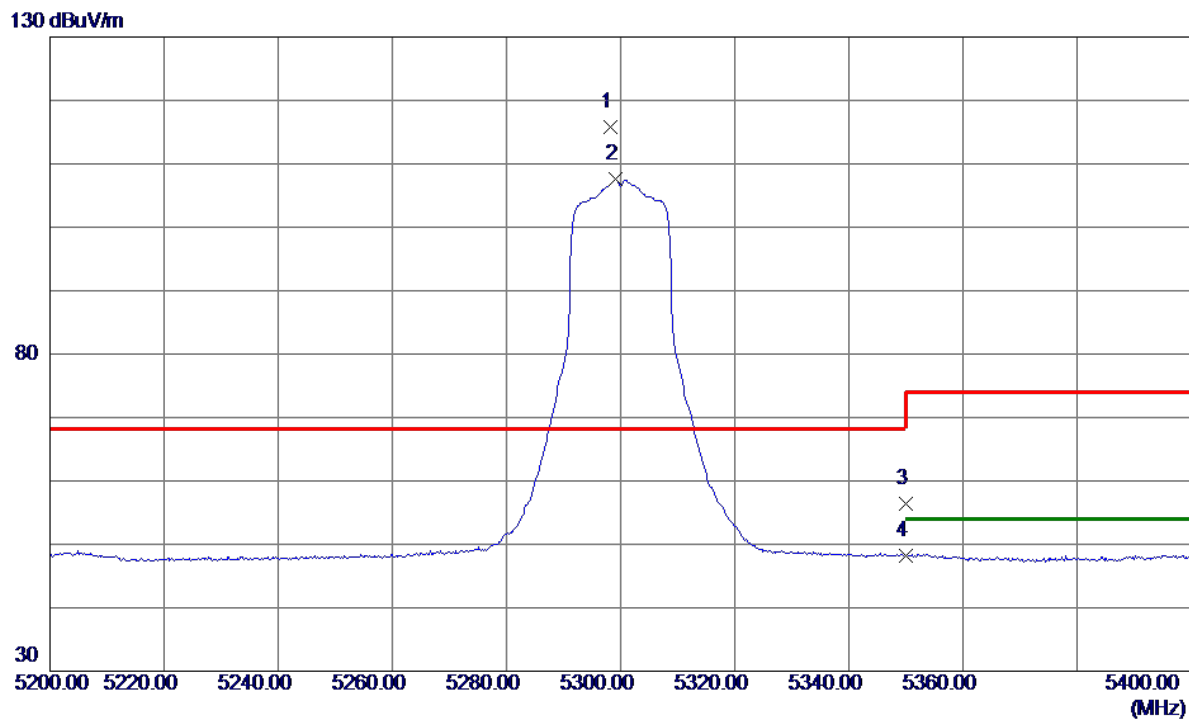


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5298.2000	100.38	15.37	115.75	68.20	47.55	Peak	No Limit
2	5299.2000	92.21	15.37	107.58	999.00	-891.42	AVG	No Limit
3	5350.0000	40.85	15.51	56.36	74.00	-17.64	Peak	
4	5350.0000	32.63	15.51	48.14	54.00	-5.86	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

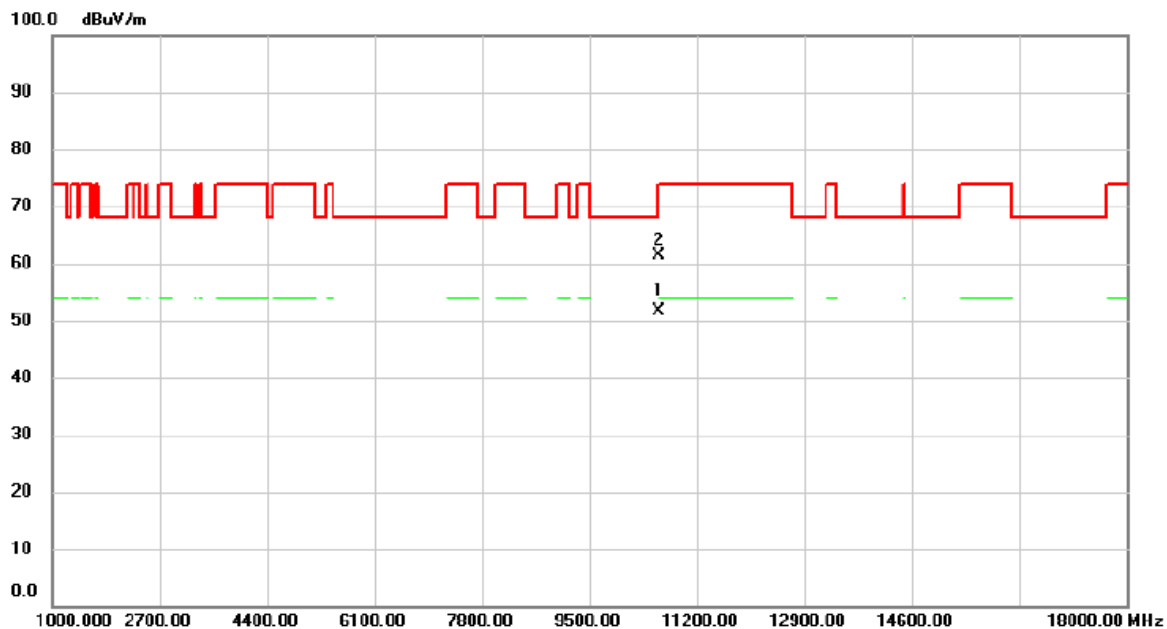


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10600.000	42.30	9.21	51.51	54.00	-2.49	AVG	
2		10600.540	52.13	9.21	61.34	74.00	-12.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

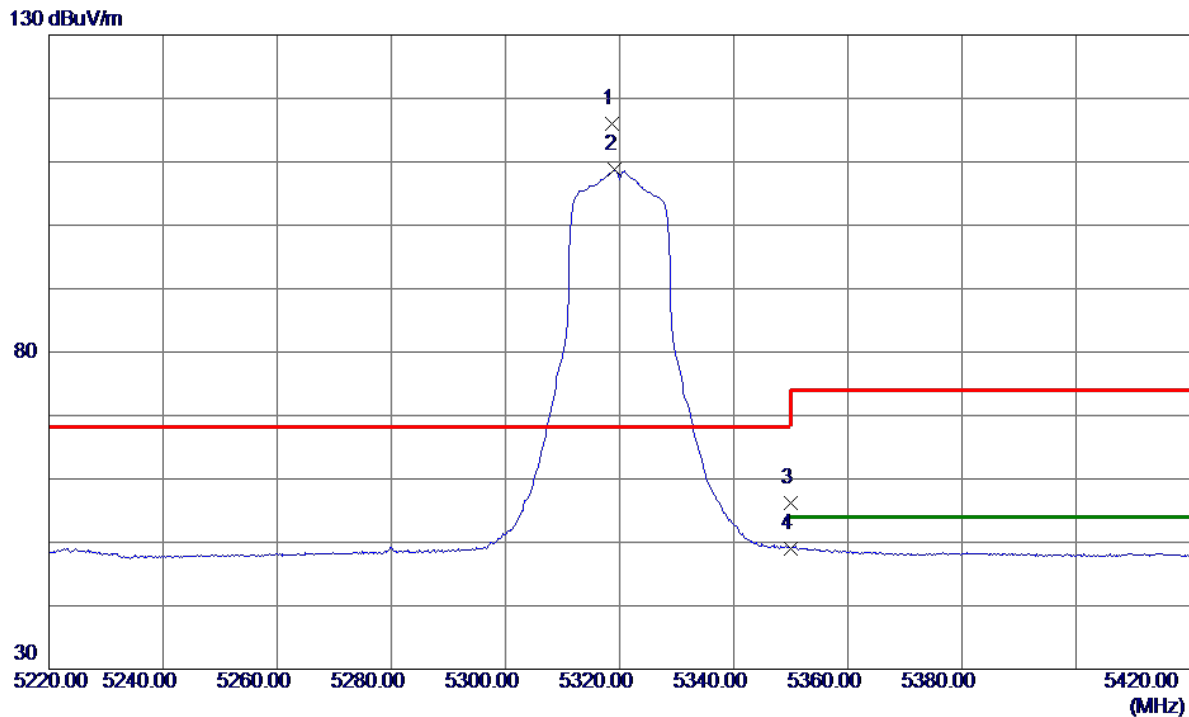


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5318.6000	100.65	15.42	116.07	68.20	47.87	Peak	No Limit
2	5319.2000	93.33	15.43	108.76	999.00	-890.24	AVG	No Limit
3	5350.0000	40.64	15.51	56.15	74.00	-17.85	Peak	
4	5350.0000	33.54	15.51	49.05	54.00	-4.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

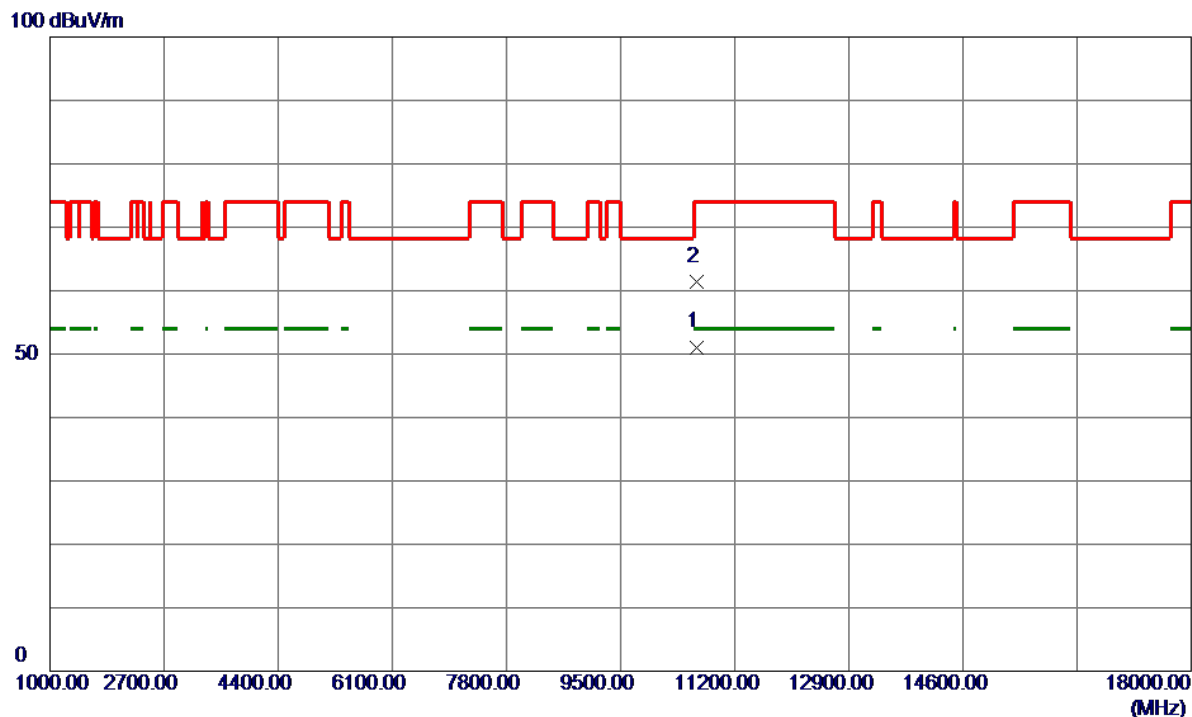


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10637.7500	41.84	9.26	51.10	54.00	-2.90	AVG	
2	10637.3900	52.19	9.26	61.45	74.00	-12.55	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5260 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

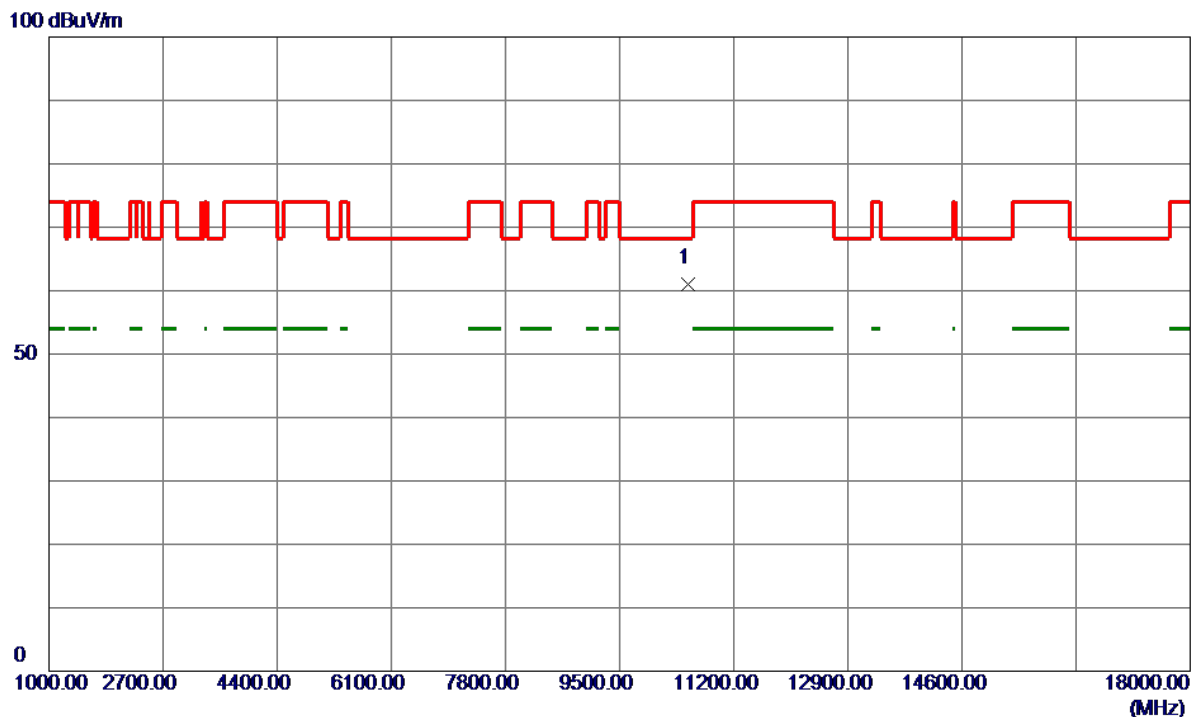


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10522.7200	52.00	9.10	61.10	68.20	-7.10	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

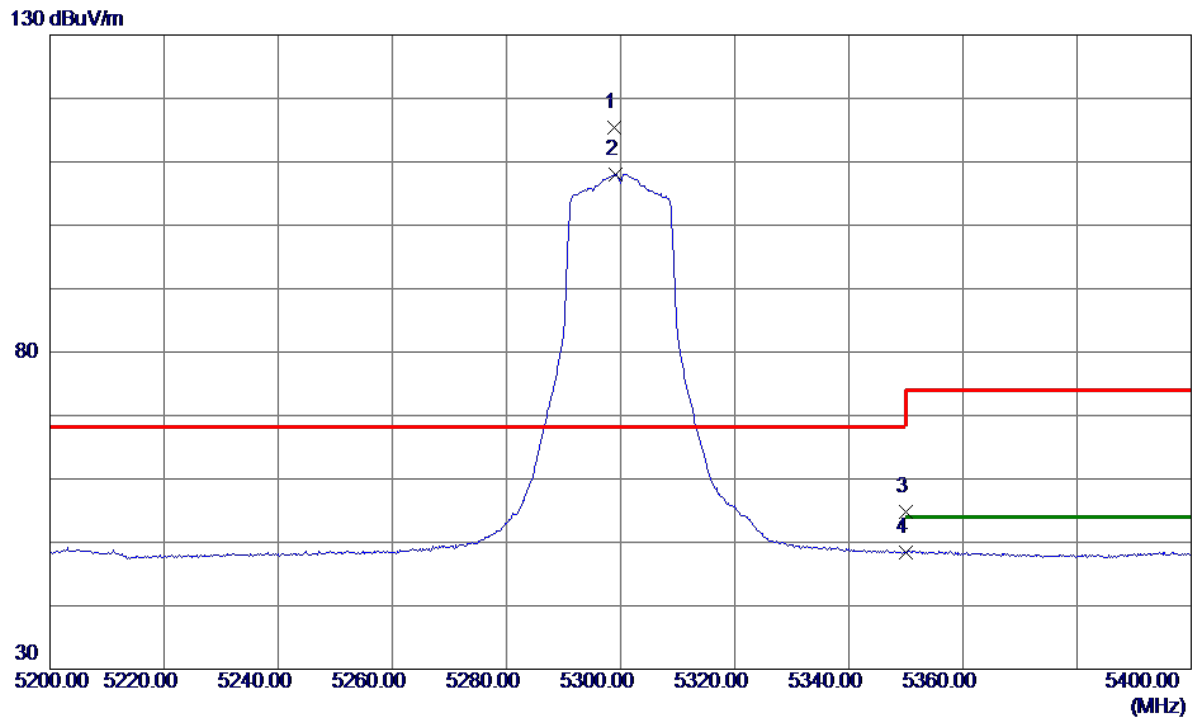


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5298.8000	100.10	15.37	115.47	68.20	47.27	Peak	No Limit
2	5299.2000	92.66	15.37	108.03	999.00	-890.97	AVG	No Limit
3	5350.0000	39.23	15.51	54.74	74.00	-19.26	Peak	
4	5350.0000	32.80	15.51	48.31	54.00	-5.69	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

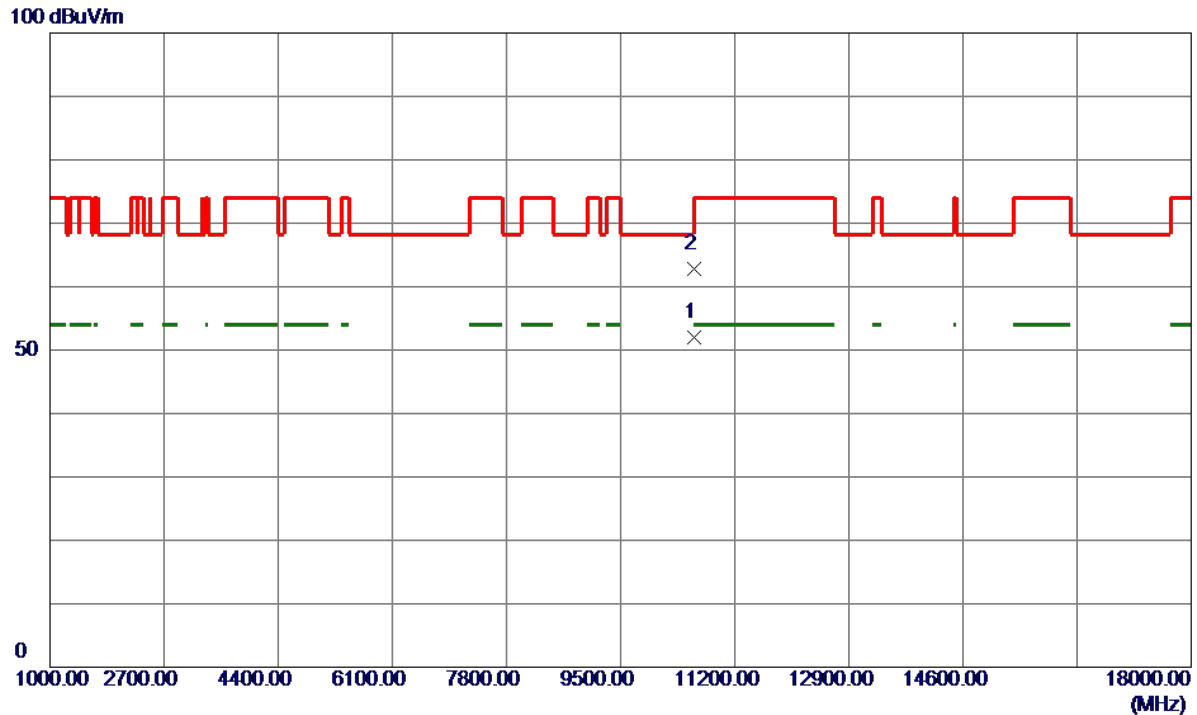


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10601.1200	42.75	9.21	51.96	54.00	-2.04	AVG	
2	10602.6800	53.52	9.21	62.73	74.00	-11.27	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

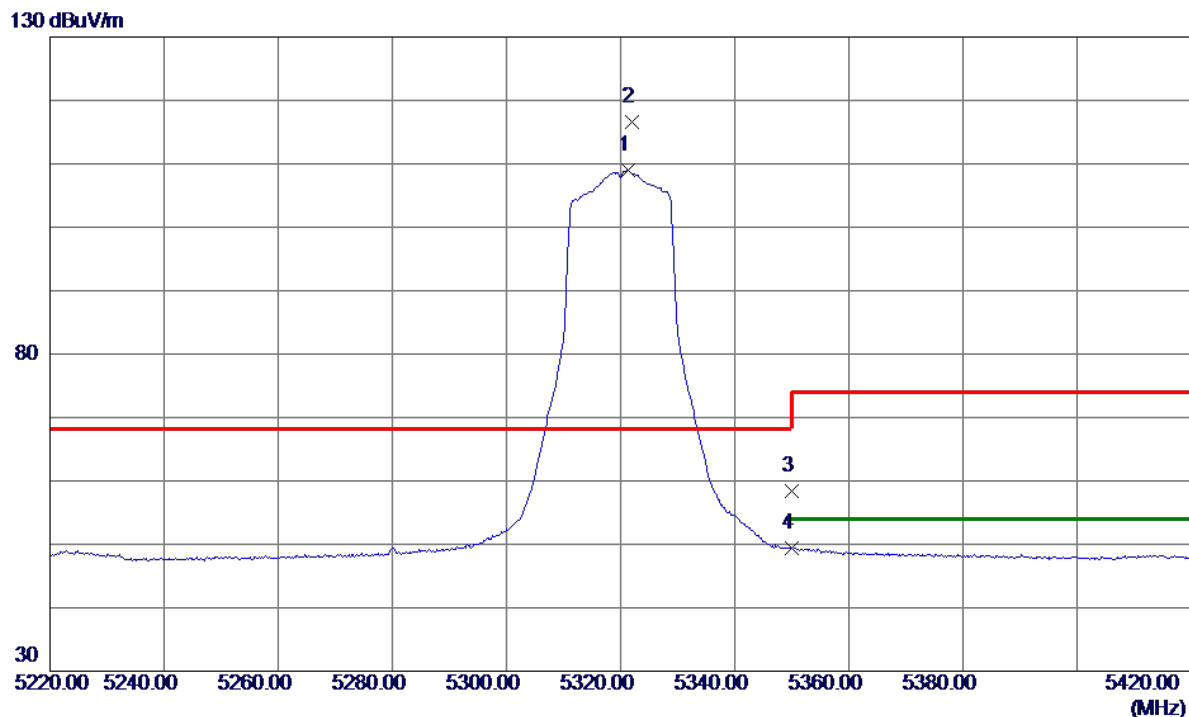


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5321.4000	93.49	15.43	108.92	999.00	-890.08	AVG	No Limit
2 *	5322.0000	101.25	15.43	116.68	68.20	48.48	Peak	No Limit
3	5350.0000	42.80	15.51	58.31	74.00	-15.69	Peak	
4	5350.0000	33.95	15.51	49.46	54.00	-4.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

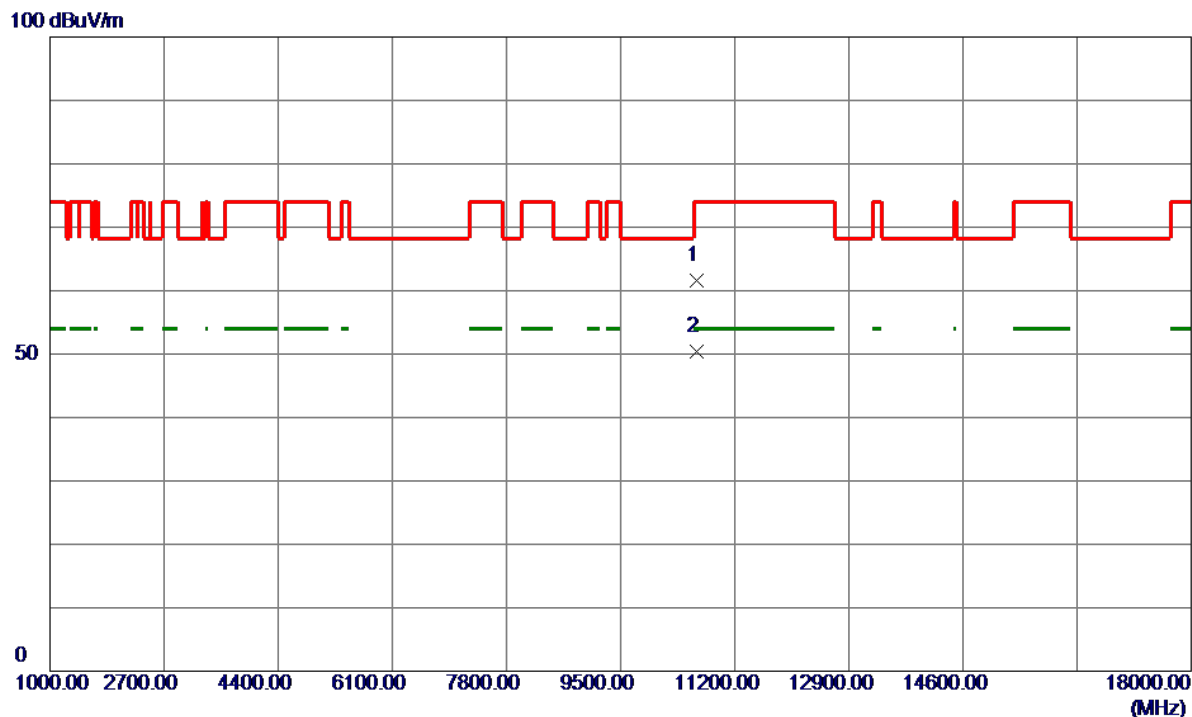


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10633.8800	52.42	9.25	61.67	74.00	-12.33	Peak	
2 *	10634.8000	41.19	9.25	50.44	54.00	-3.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

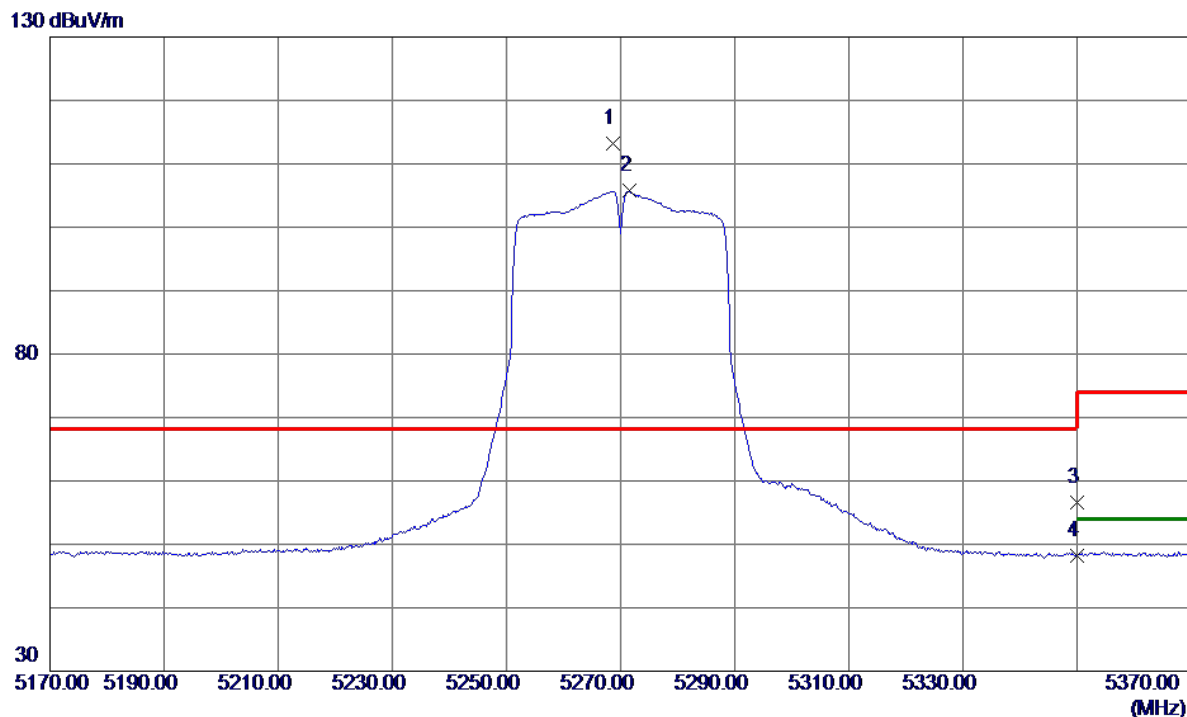


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5268.6000	97.88	15.29	113.17	68.20	44.97	Peak	No Limit
2	5271.6000	90.42	15.30	105.72	999.00	-893.28	AVG	No Limit
3	5350.0000	41.02	15.51	56.53	74.00	-17.47	Peak	
4	5350.0000	32.73	15.51	48.24	54.00	-5.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

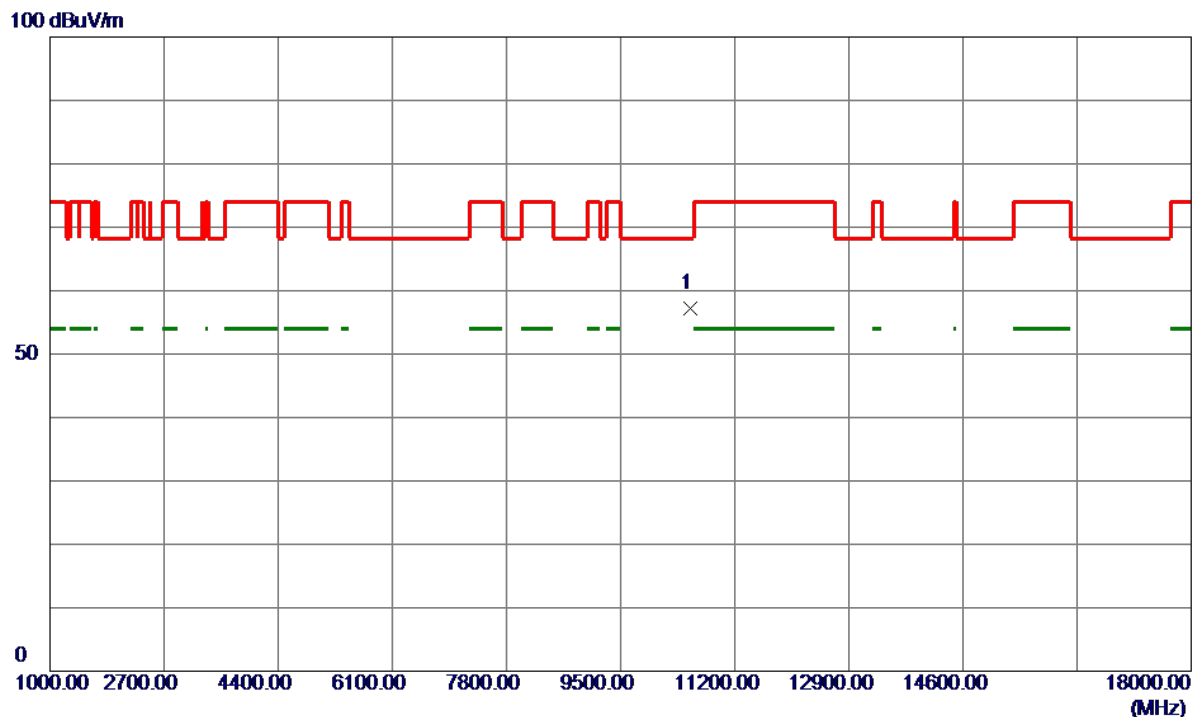


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10539.9500	48.17	9.12	57.29	68.20	-10.91	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

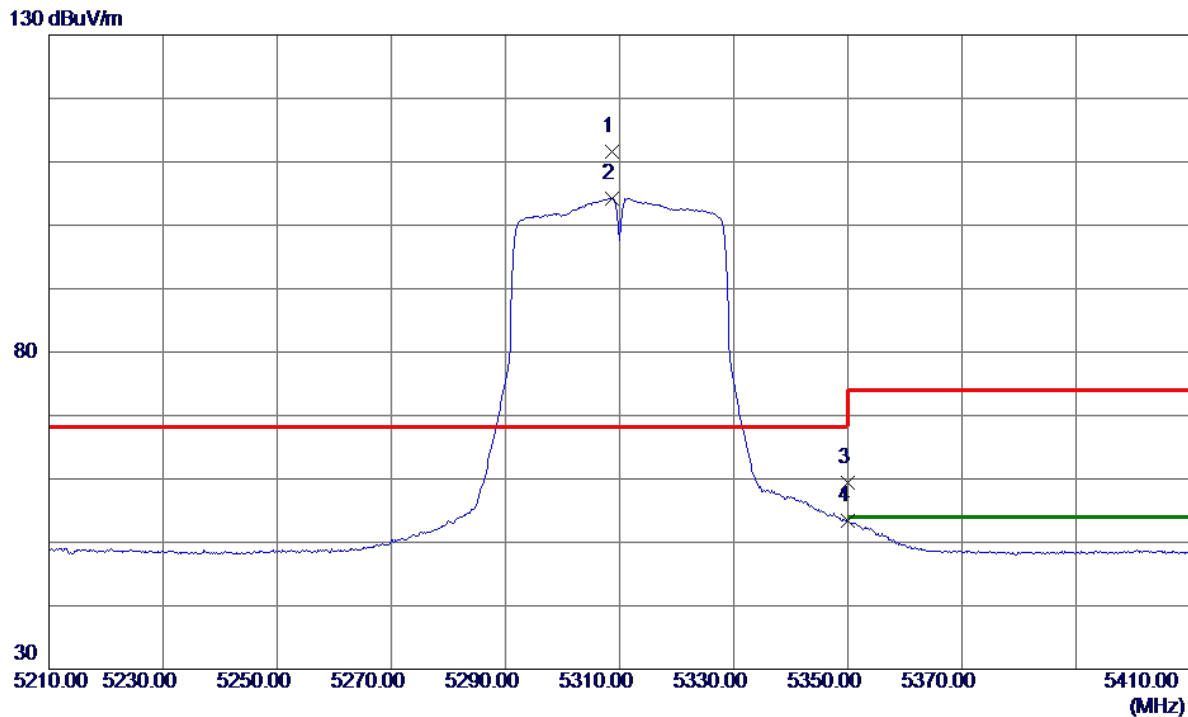


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5308.6000	96.29	15.40	111.69	68.20	43.49	Peak	No Limit
2	5308.6000	88.84	15.40	104.24	999.00	-894.76	AVG	No Limit
3	5350.0000	43.80	15.51	59.31	74.00	-14.69	Peak	
4	5350.0000	37.86	15.51	53.37	54.00	-0.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

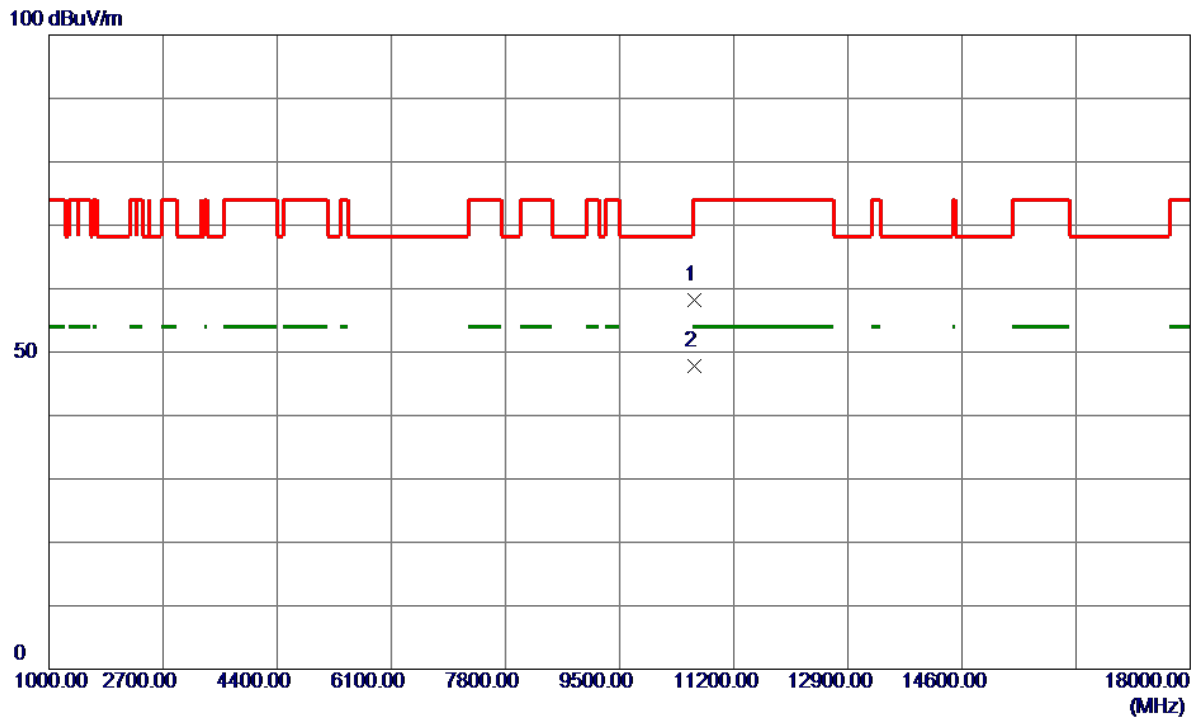


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10619.5500	48.97	9.23	58.20	74.00	-15.80	Peak	
2 *	10619.9000	38.63	9.23	47.86	54.00	-6.14	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

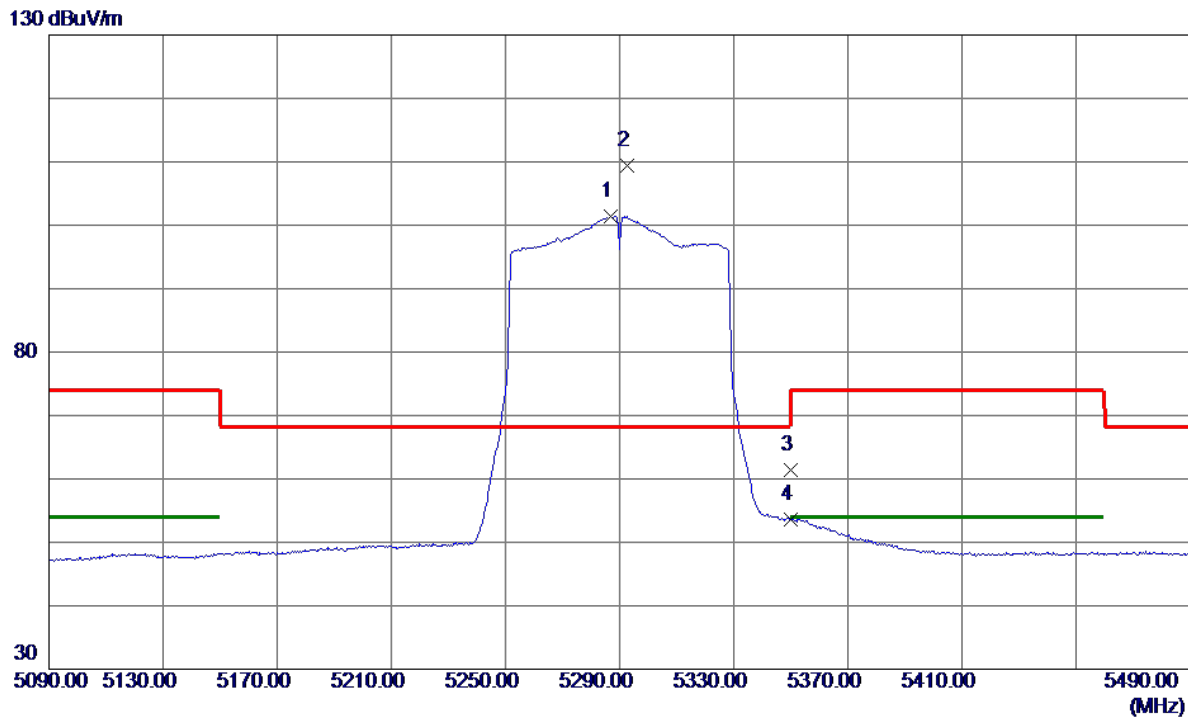


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5286.8000	86.08	15.34	101.42	999.00	-897.58	AVG	No Limit
2 *	5292.8000	94.06	15.36	109.42	68.20	41.22	Peak	No Limit
3	5350.0000	45.85	15.51	61.36	74.00	-12.64	Peak	
4	5350.0000	38.03	15.51	53.54	54.00	-0.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

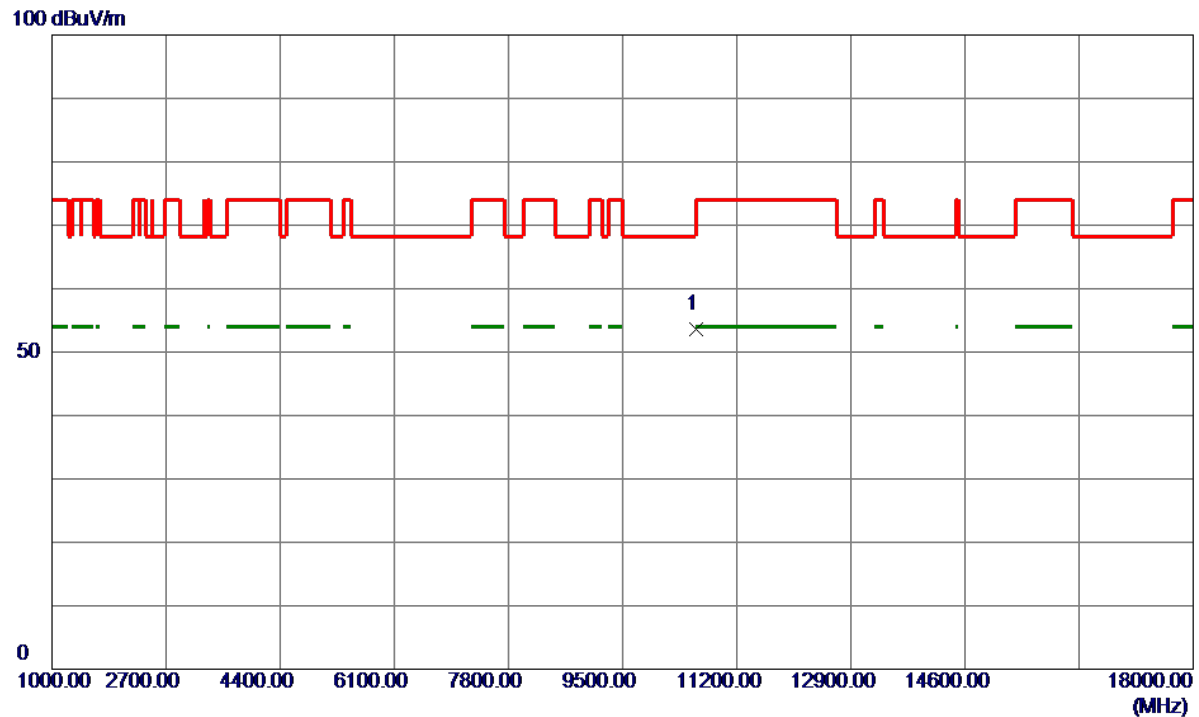


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10592.2000	44.44	9.19	53.63	68.20	-14.57	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5260 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

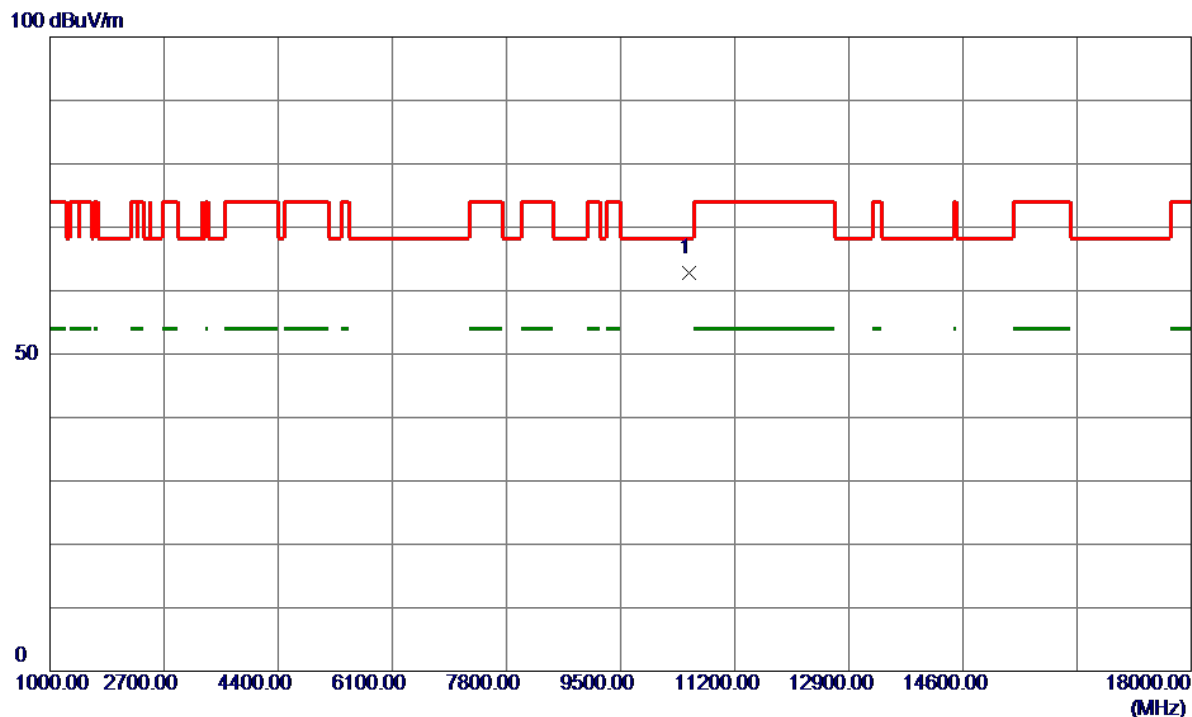


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10523.4800	53.77	9.10	62.87	68.20	-5.33	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5300 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

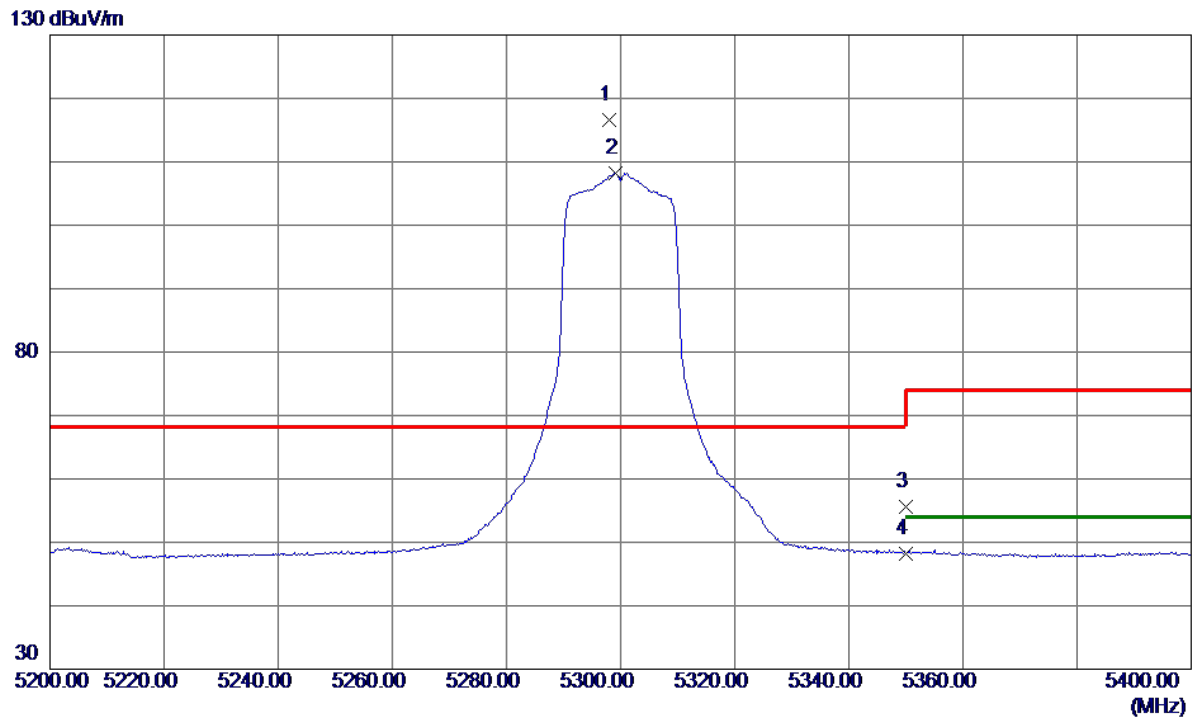


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5298.0000	101.30	15.37	116.67	68.20	48.47	Peak	No Limit
2	5299.2000	92.79	15.37	108.16	999.00	-890.84	AVG	No Limit
3	5350.0000	40.18	15.51	55.69	74.00	-18.31	Peak	
4	5350.0000	32.78	15.51	48.29	54.00	-5.71	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5300 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

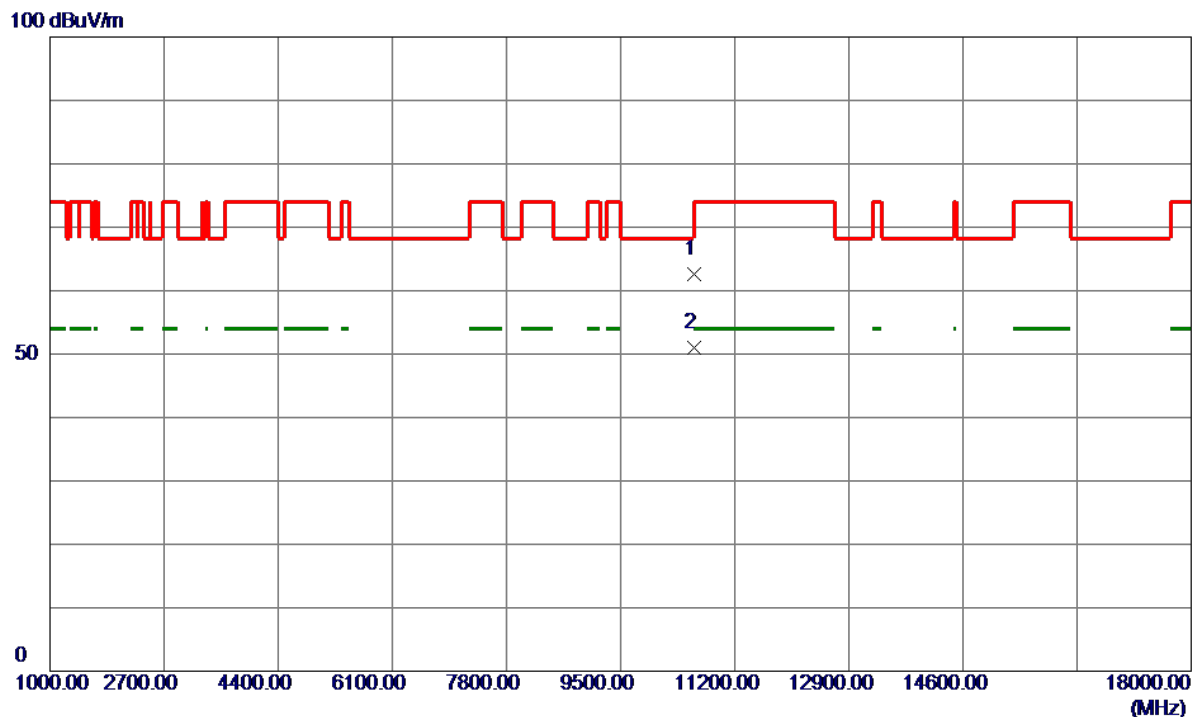


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10600.5400	53.39	9.21	62.60	74.00	-11.40	Peak	
2 *	10600.9900	41.74	9.21	50.95	54.00	-3.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

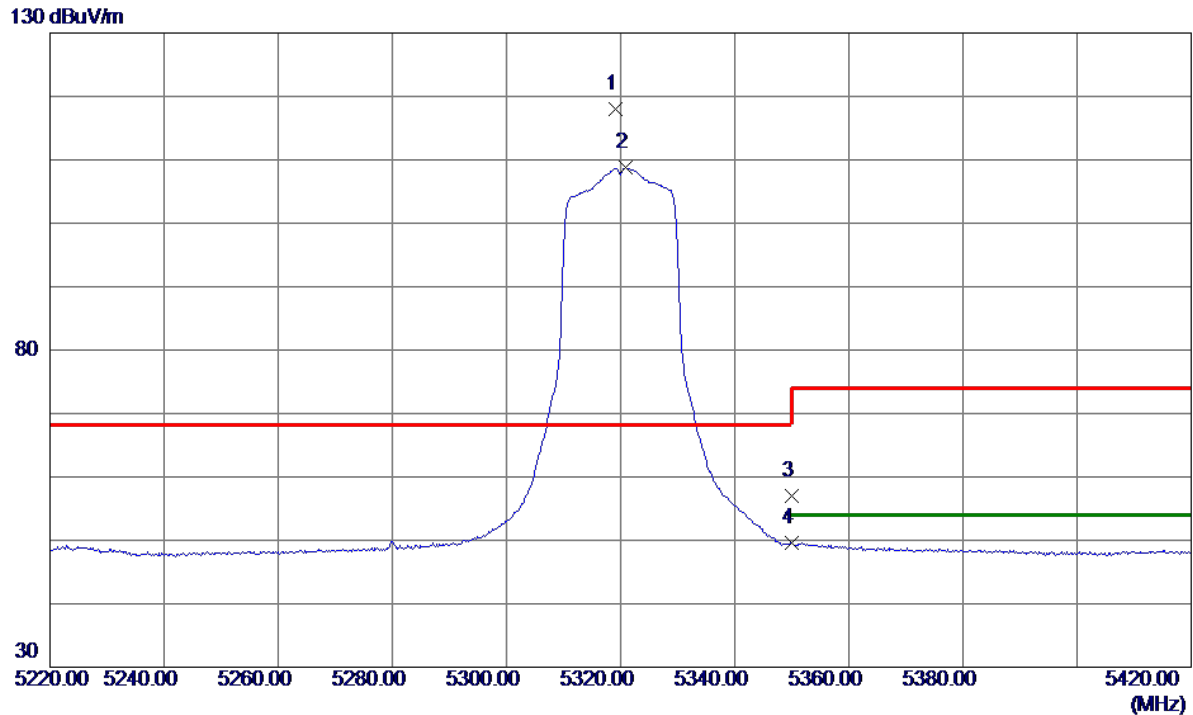


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5319.2000	102.65	15.43	118.08	68.20	49.88	Peak	No Limit
2	5320.8000	93.39	15.43	108.82	999.00	-890.18	AVG	No Limit
3	5350.0000	41.51	15.51	57.02	74.00	-16.98	Peak	
4	5350.0000	34.03	15.51	49.54	54.00	-4.46	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

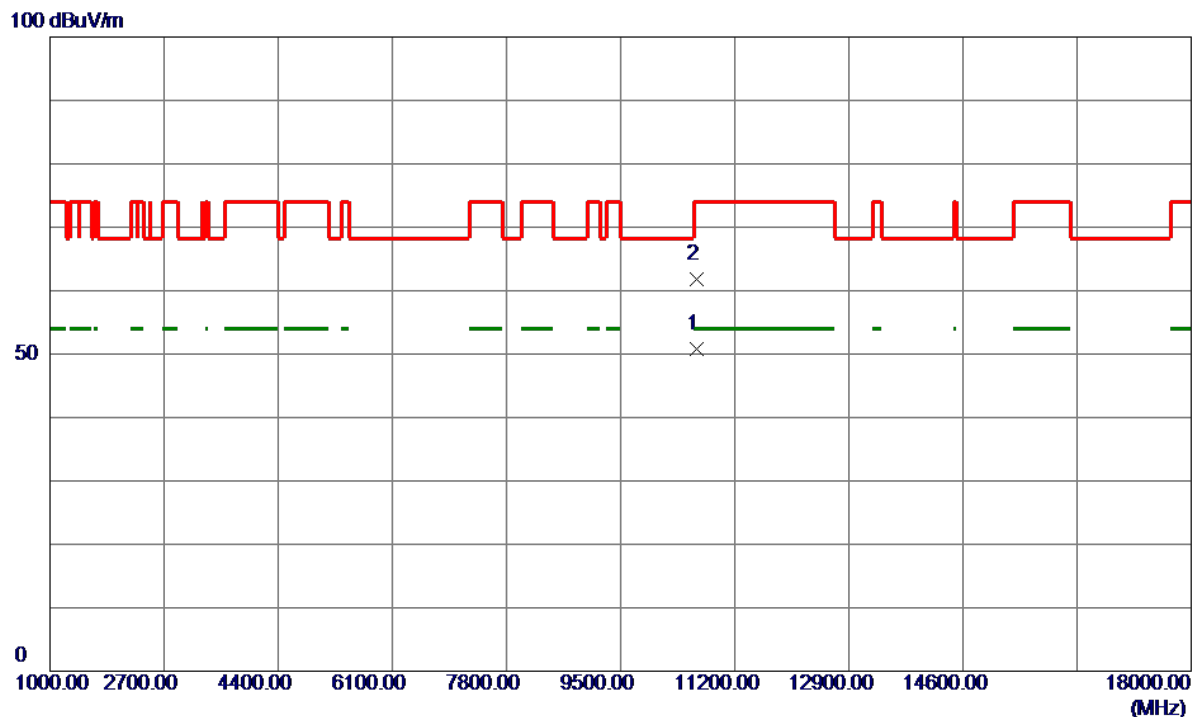


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10636.1900	41.45	9.26	50.71	54.00	-3.29	AVG	
2	10637.0000	52.55	9.26	61.81	74.00	-12.19	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

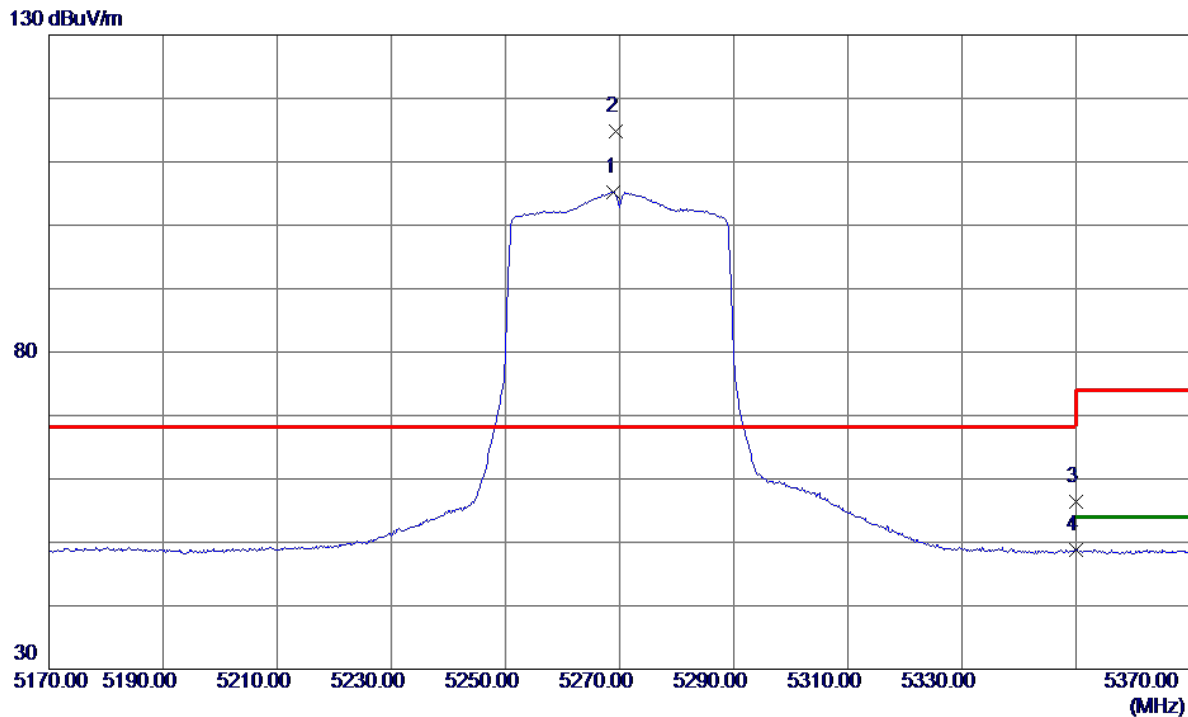


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5269.0000	89.96	15.29	105.25	999.00	-893.75	AVG	No Limit
2 *	5269.4000	99.60	15.29	114.89	68.20	46.69	Peak	No Limit
3	5350.0000	40.81	15.51	56.32	74.00	-17.68	Peak	
4	5350.0000	33.23	15.51	48.74	54.00	-5.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

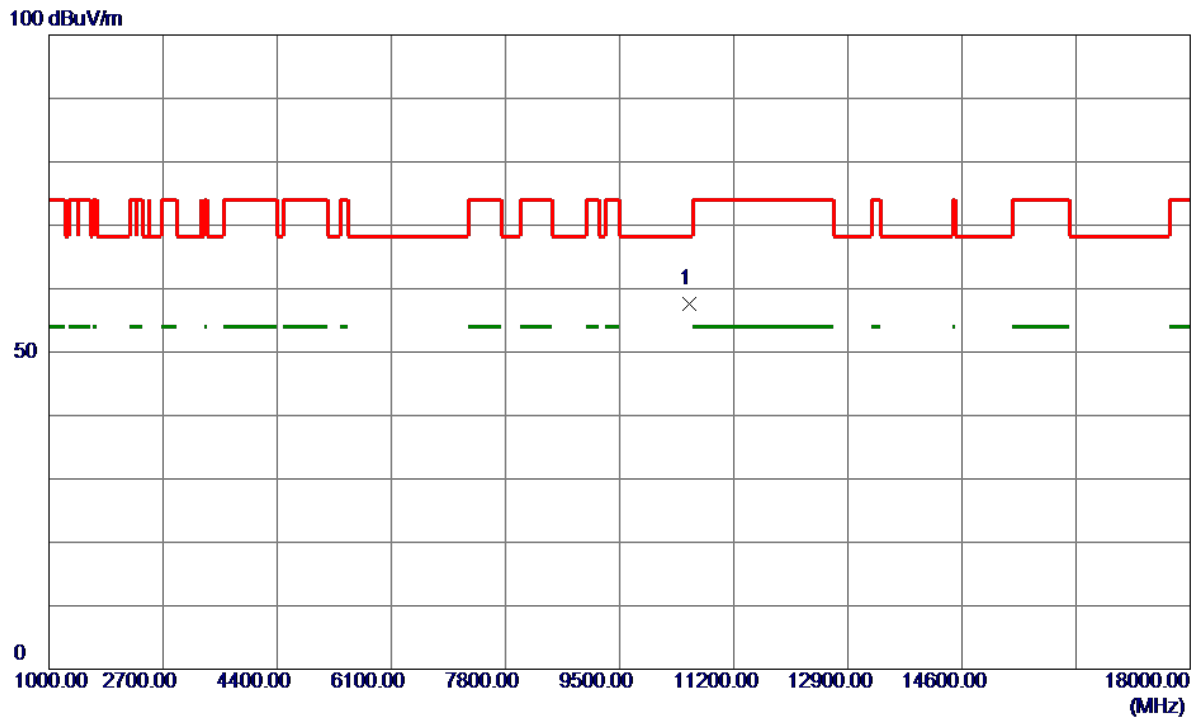


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10534.9200	48.55	9.11	57.66	68.20	-10.54	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

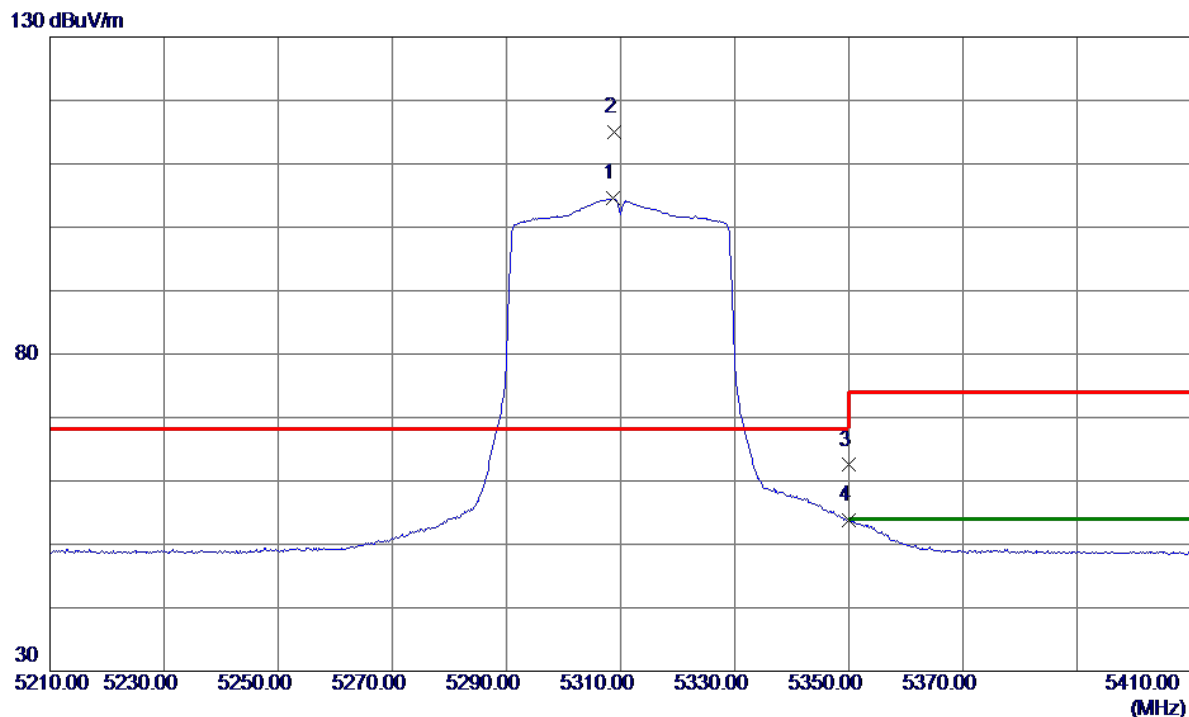


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5308.6000	89.17	15.40	104.57	999.00	-894.43	AVG	No Limit
2 *	5308.8000	99.68	15.40	115.08	68.20	46.88	Peak	No Limit
3	5350.0000	46.99	15.51	62.50	74.00	-11.50	Peak	
4	5350.0000	38.22	15.51	53.73	54.00	-0.27	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

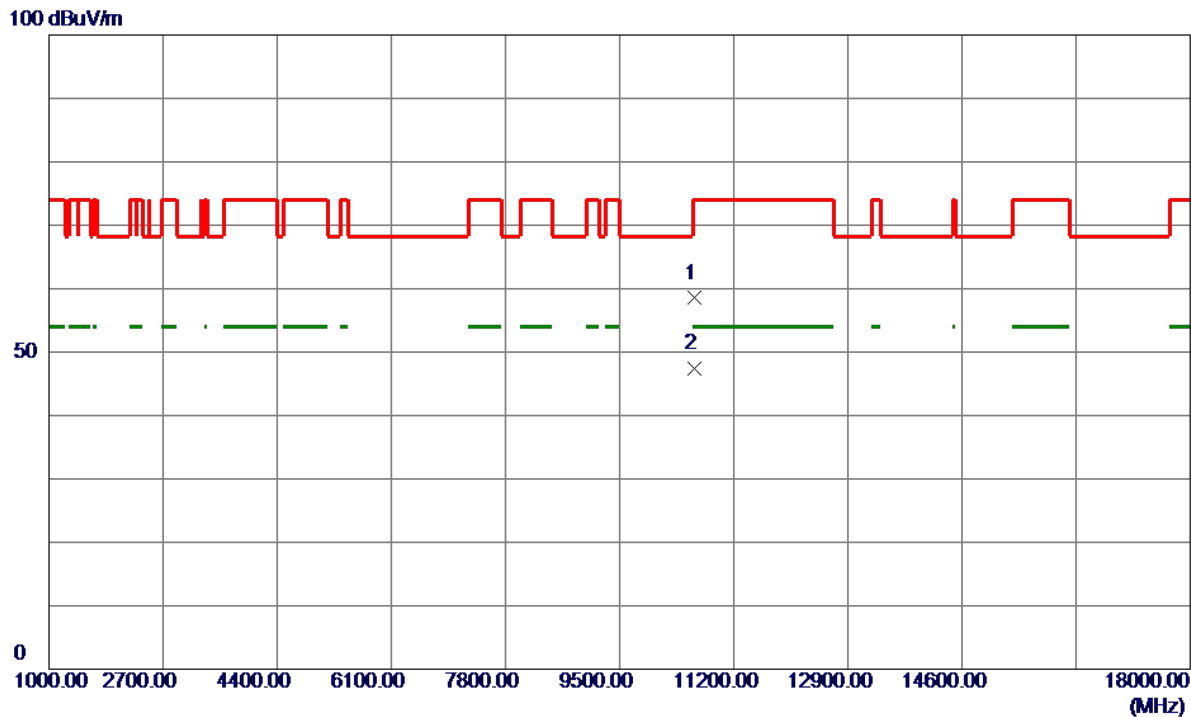


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10621.3600	49.26	9.24	58.50	74.00	-15.50	Peak	
2 *	10622.2400	38.12	9.24	47.36	54.00	-6.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

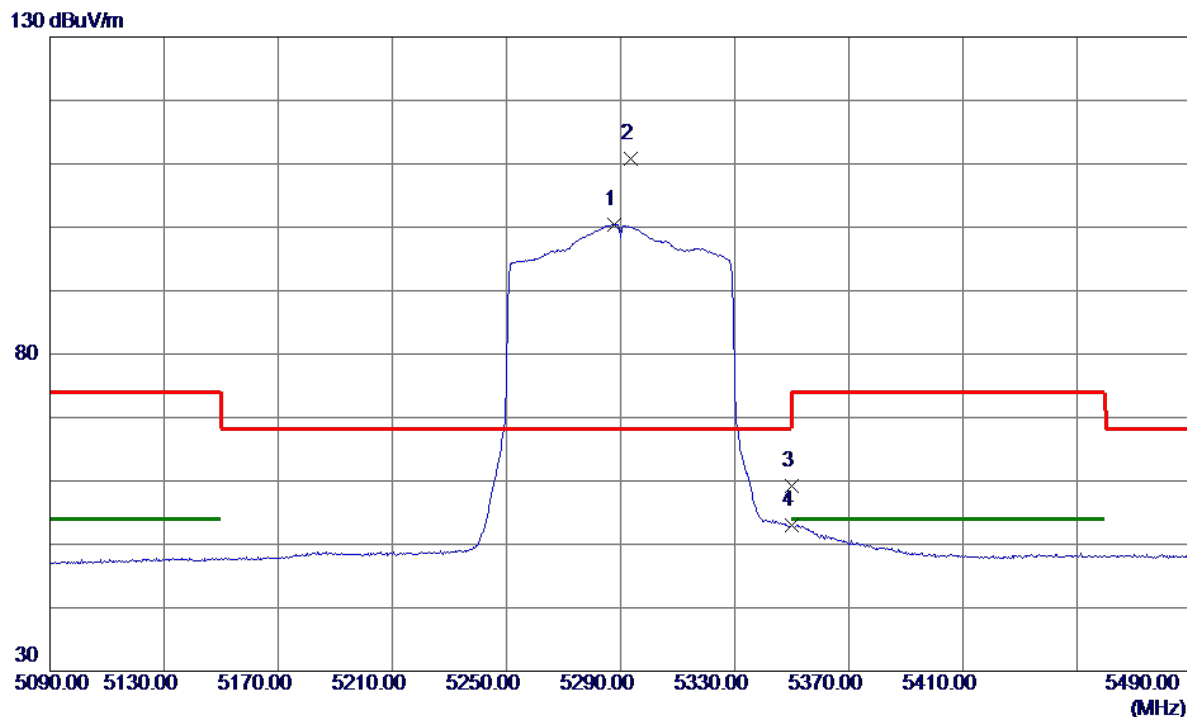


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5287.6000	85.13	15.34	100.47	999.00	-898.53	AVG	No Limit
2 *	5293.6000	95.50	15.36	110.86	68.20	42.66	Peak	No Limit
3	5350.0000	43.61	15.51	59.12	74.00	-14.88	Peak	
4	5350.0000	37.50	15.51	53.01	54.00	-0.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

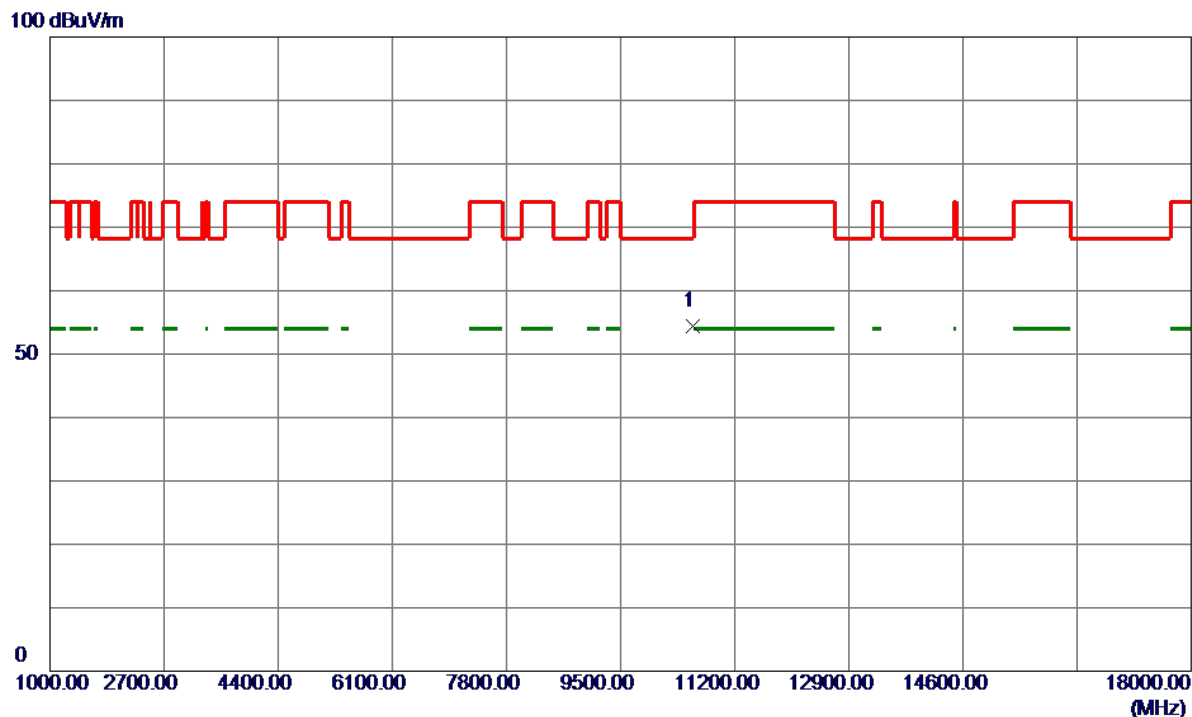


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10574.6800	45.17	9.17	54.34	68.20	-13.86	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode 5250 MHz	Polarization	Vertical
-----------	--	--------------	----------

130 dBuV/m

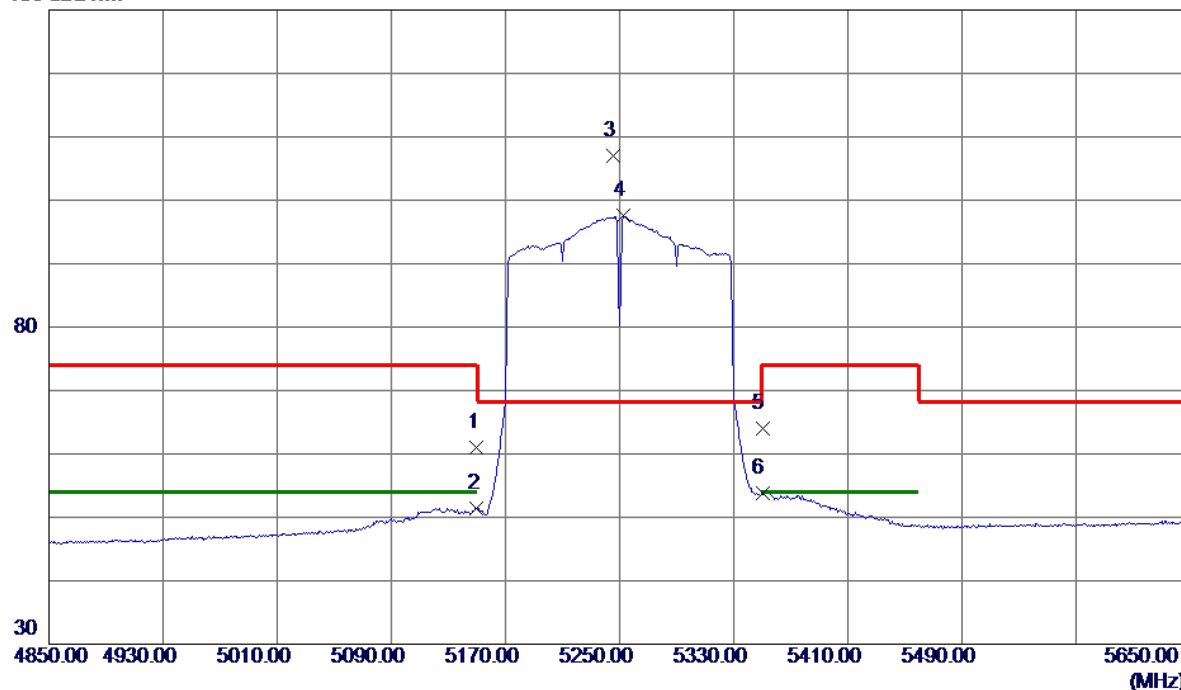


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	45.95	14.98	60.93	74.00	-13.07	Peak	
2	5150.0000	36.34	14.98	51.32	54.00	-2.68	AVG	
3 *	5245.2000	91.71	15.23	106.94	68.20	38.74	Peak	No Limit
4	5252.4000	82.39	15.25	97.64	999.00	-901.36	AVG	No Limit
5	5350.0000	48.54	15.51	64.05	74.00	-9.95	Peak	
6	5350.0000	38.20	15.51	53.71	54.00	-0.29	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode 5250 MHz	Polarization	Vertical
-----------	--	--------------	----------

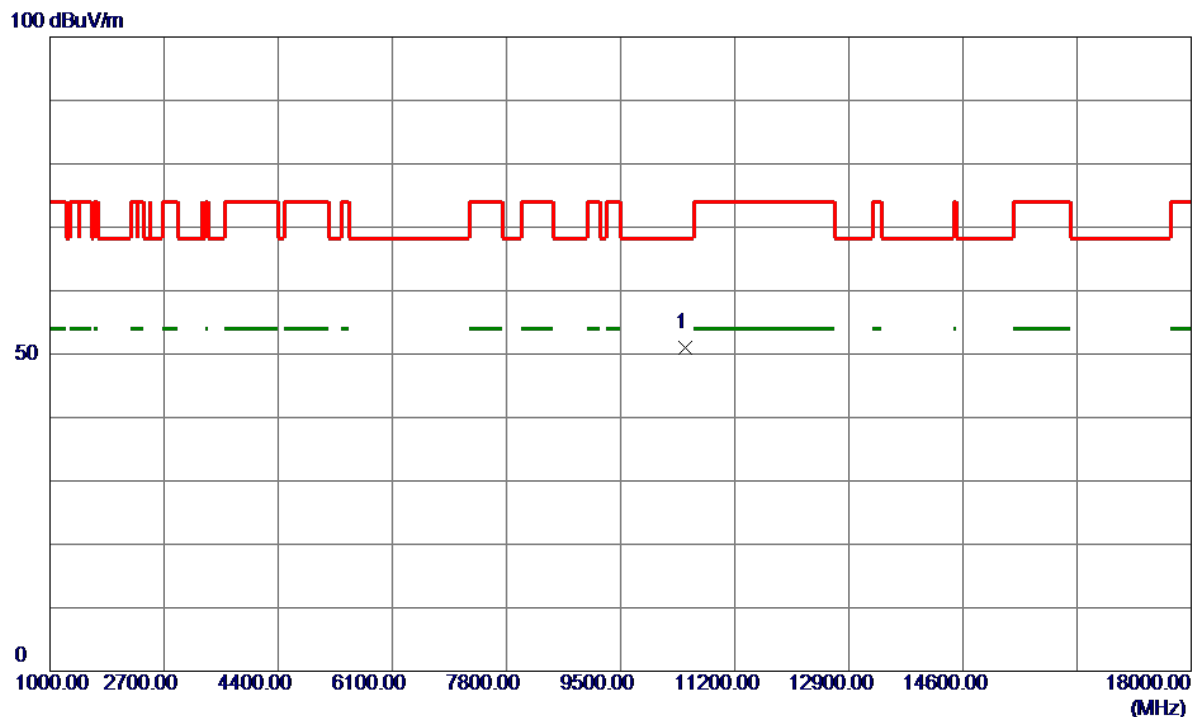


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10462.0800	42.08	9.00	51.08	68.20	-17.12	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AX(HE160) Mode 5250 MHz	Polarization	Vertical
-----------	---	--------------	----------

130 dBuV/m

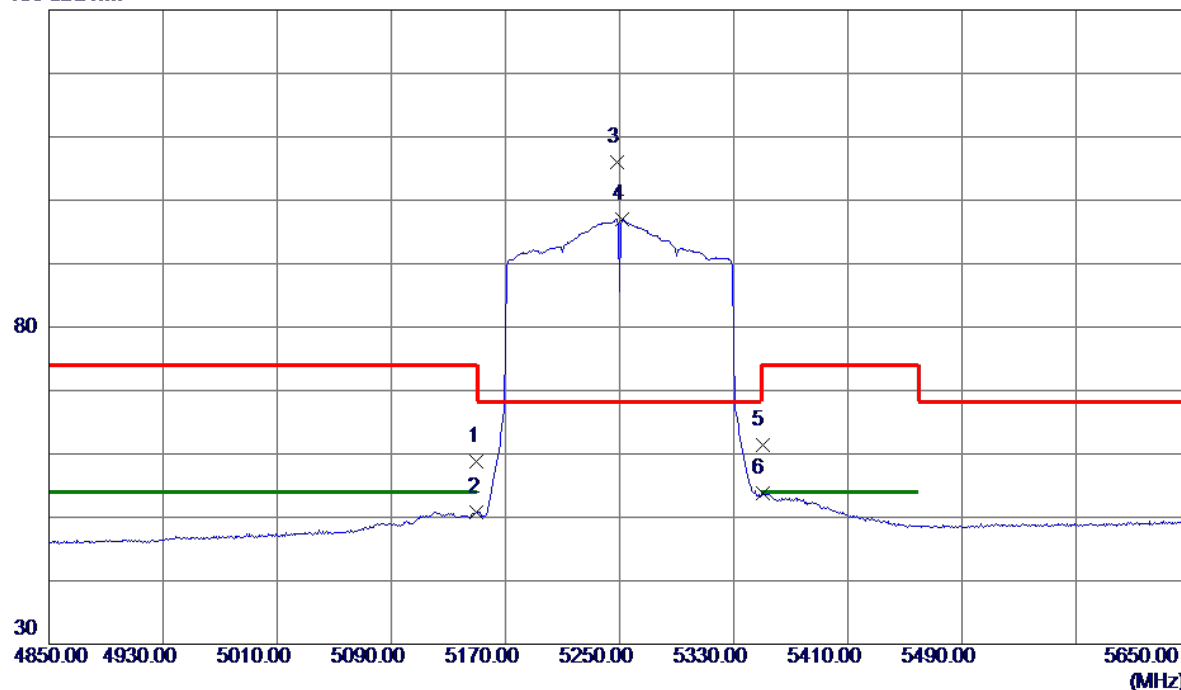


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	43.88	14.98	58.86	74.00	-15.14	Peak	
2	5150.0000	35.87	14.98	50.85	54.00	-3.15	AVG	
3 *	5248.4000	90.84	15.24	106.08	68.20	37.88	Peak	No Limit
4	5251.6000	81.75	15.25	97.00	999.00	-902.00	AVG	No Limit
5	5350.0000	45.96	15.51	61.47	74.00	-12.53	Peak	
6	5350.0000	38.25	15.51	53.76	54.00	-0.24	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AX(HE160) Mode 5250 MHz	Polarization	Vertical
-----------	---	--------------	----------

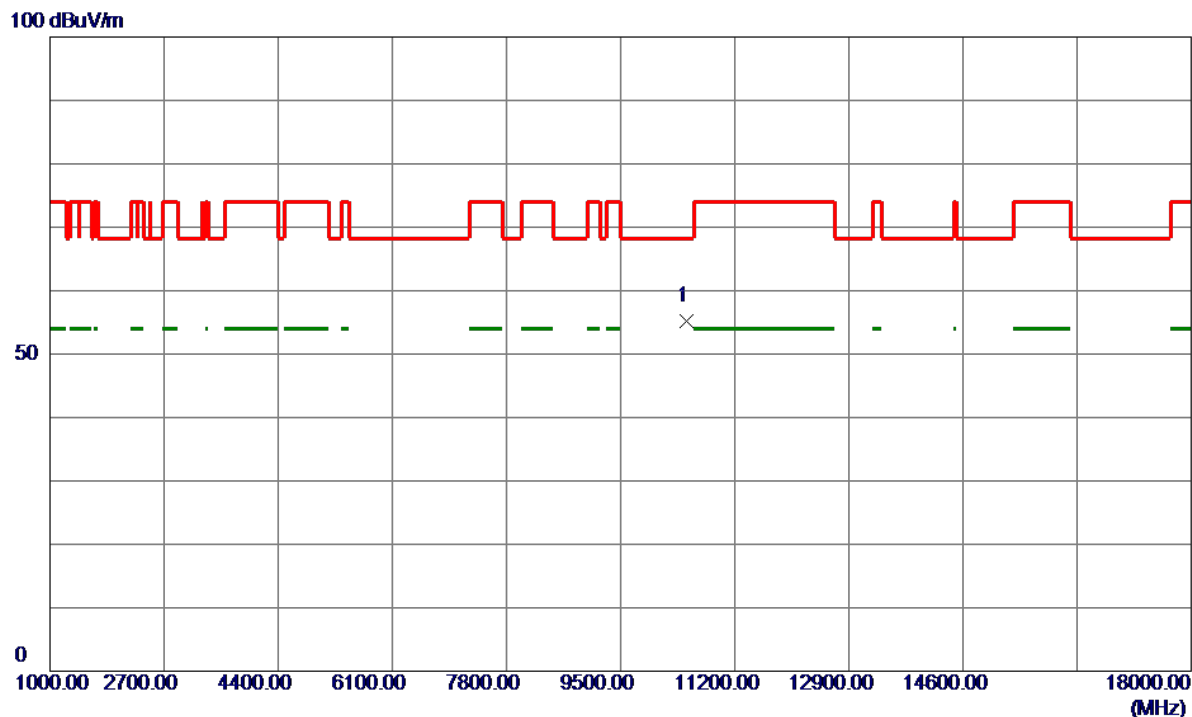


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10485.3600	46.09	9.04	55.13	68.20	-13.07	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

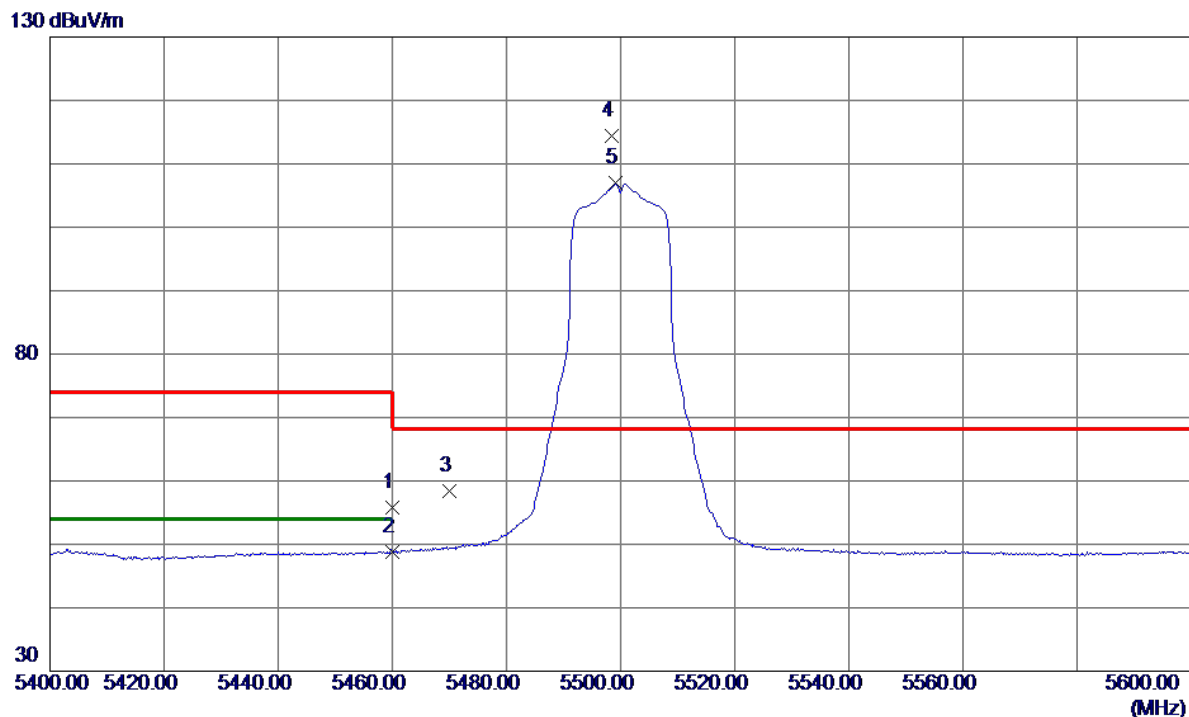


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	39.97	15.80	55.77	74.00	-18.23	Peak	
2	5460.0000	33.00	15.80	48.80	54.00	-5.20	AVG	
3	5470.0000	42.50	15.83	58.33	68.20	-9.87	Peak	
4 *	5498.4000	98.44	15.90	114.34	68.20	46.14	Peak	No Limit
5	5499.2000	91.01	15.90	106.91	999.00	-892.09	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

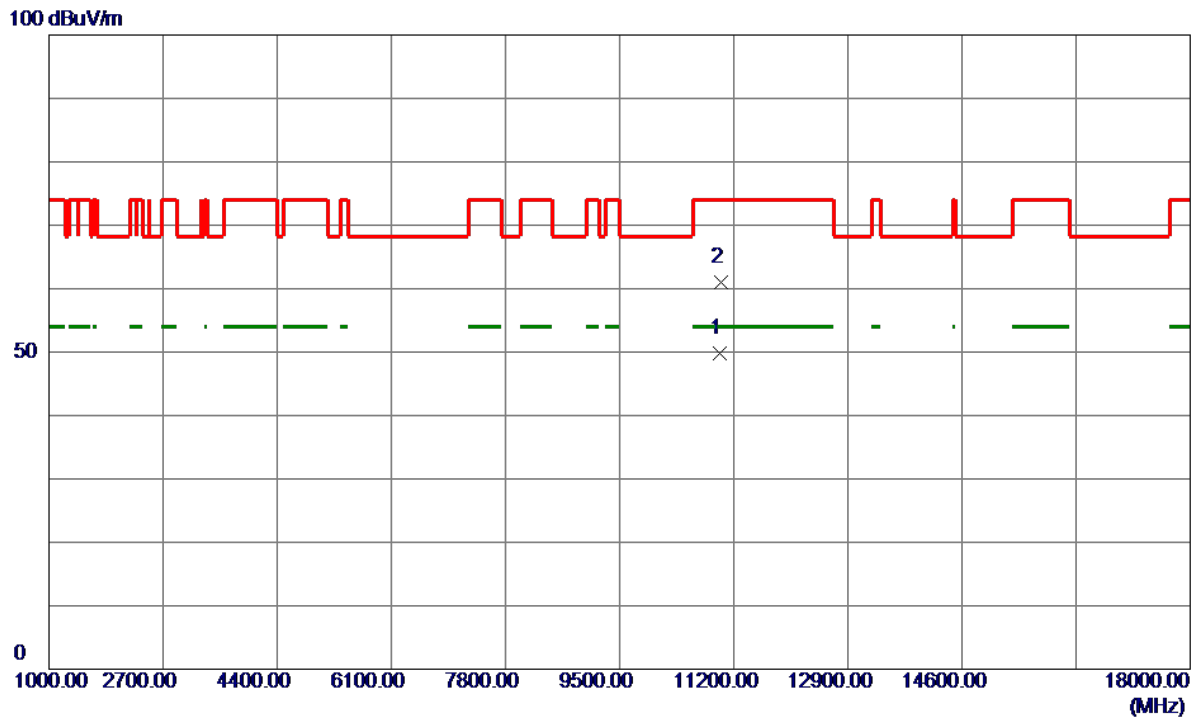


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10998.1100	39.95	9.77	49.72	54.00	-4.28	AVG	
2	11002.8500	51.24	9.77	61.01	74.00	-12.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

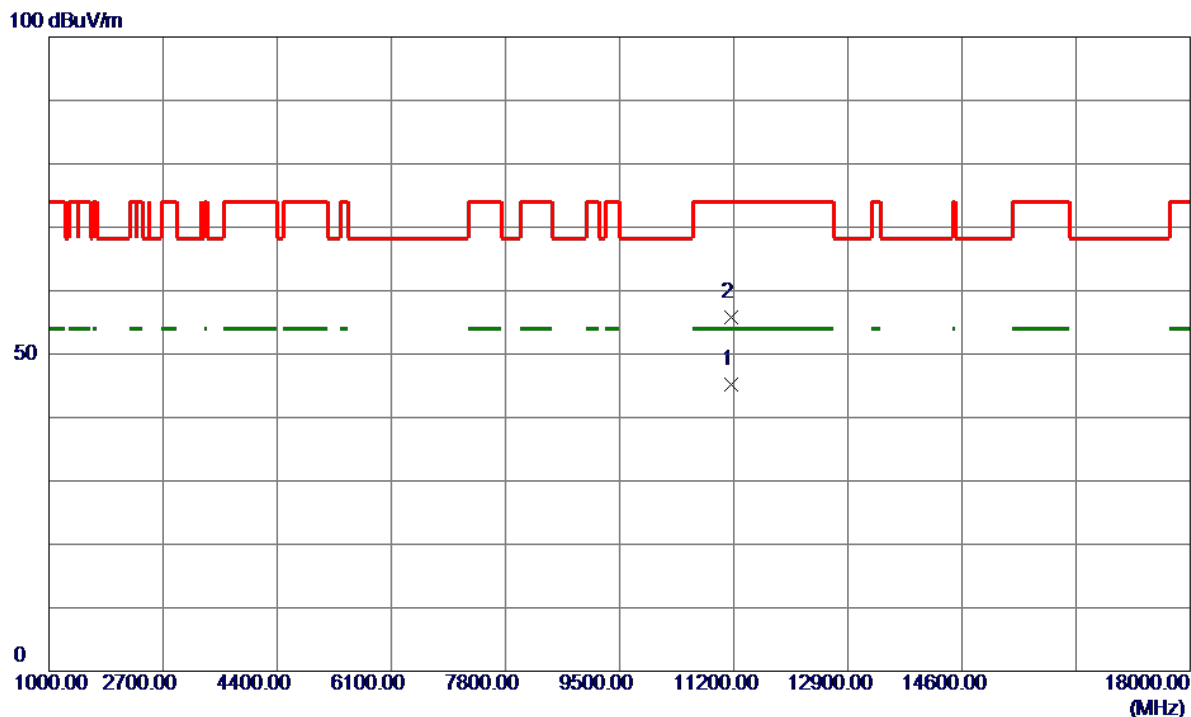


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11160.0599	35.72	9.55	45.27	54.00	-8.73	AVG	
2	11160.6000	46.24	9.55	55.79	74.00	-18.21	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

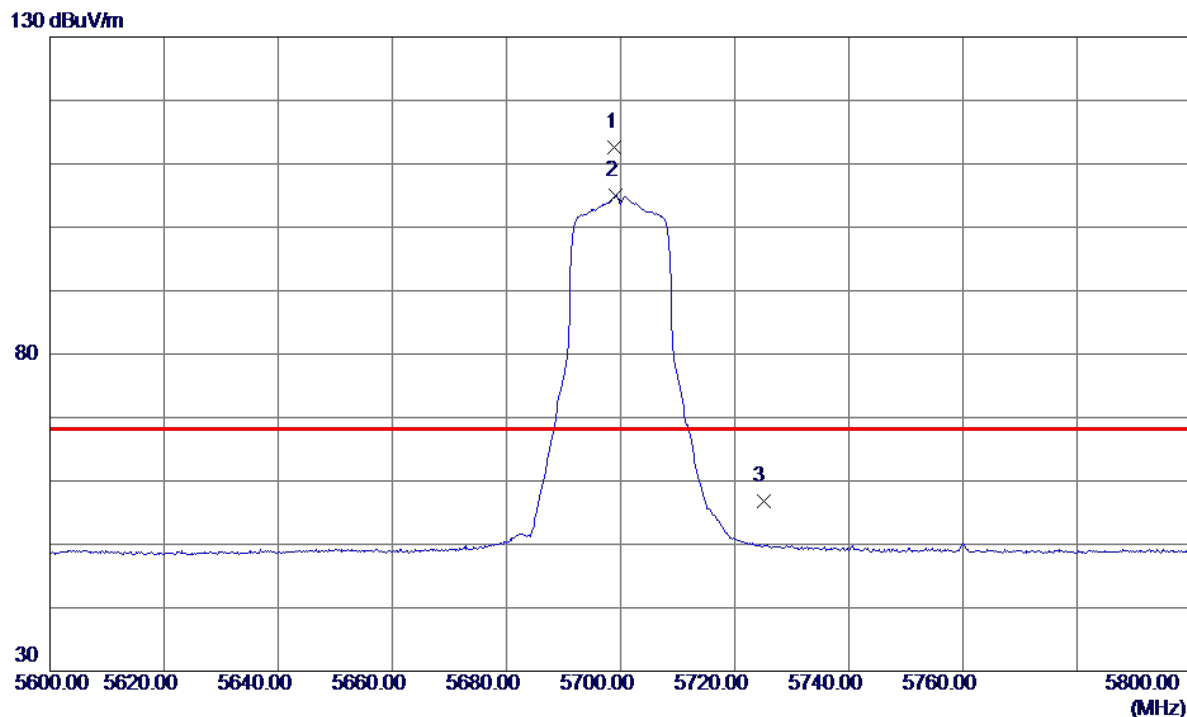


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5699.0000	96.07	16.60	112.67	68.20	44.47	Peak	No Limit
2	5699.2000	88.40	16.60	105.00	999.00	-894.00	AVG	No Limit
3	5725.0000	40.12	16.69	56.81	68.20	-11.39	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

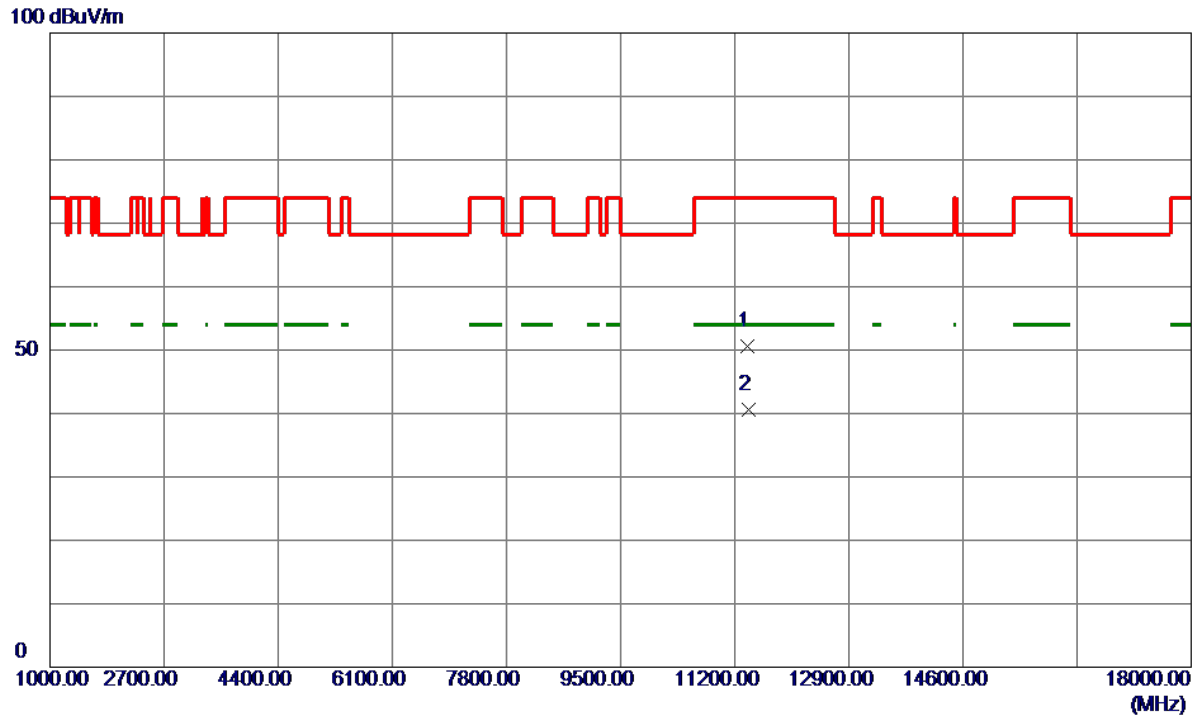


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11394.3000	41.34	9.22	50.56	74.00	-23.44	Peak	
2 *	11400.0900	31.44	9.21	40.65	54.00	-13.35	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

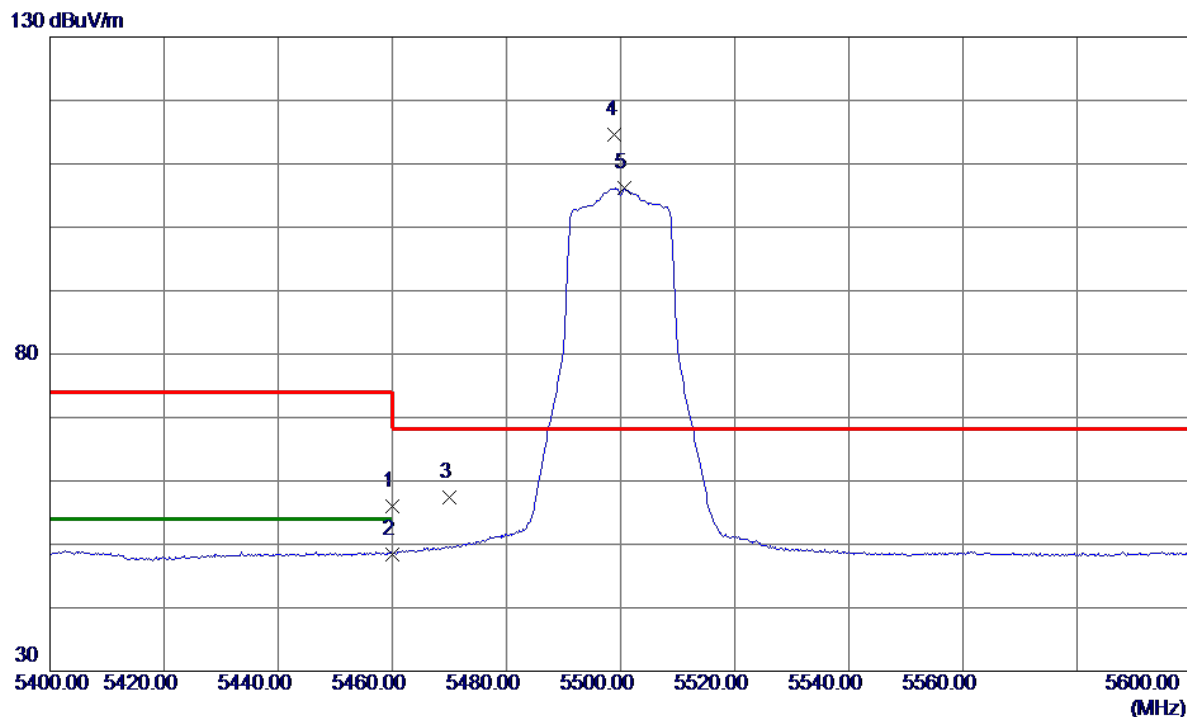


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	40.28	15.80	56.08	74.00	-17.92	Peak	
2	5460.0000	32.69	15.80	48.49	54.00	-5.51	AVG	
3	5470.0000	41.54	15.83	57.37	68.20	-10.83	Peak	
4 *	5499.0000	98.72	15.90	114.62	68.20	46.42	Peak	No Limit
5	5500.6000	90.26	15.91	106.17	999.00	-892.83	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

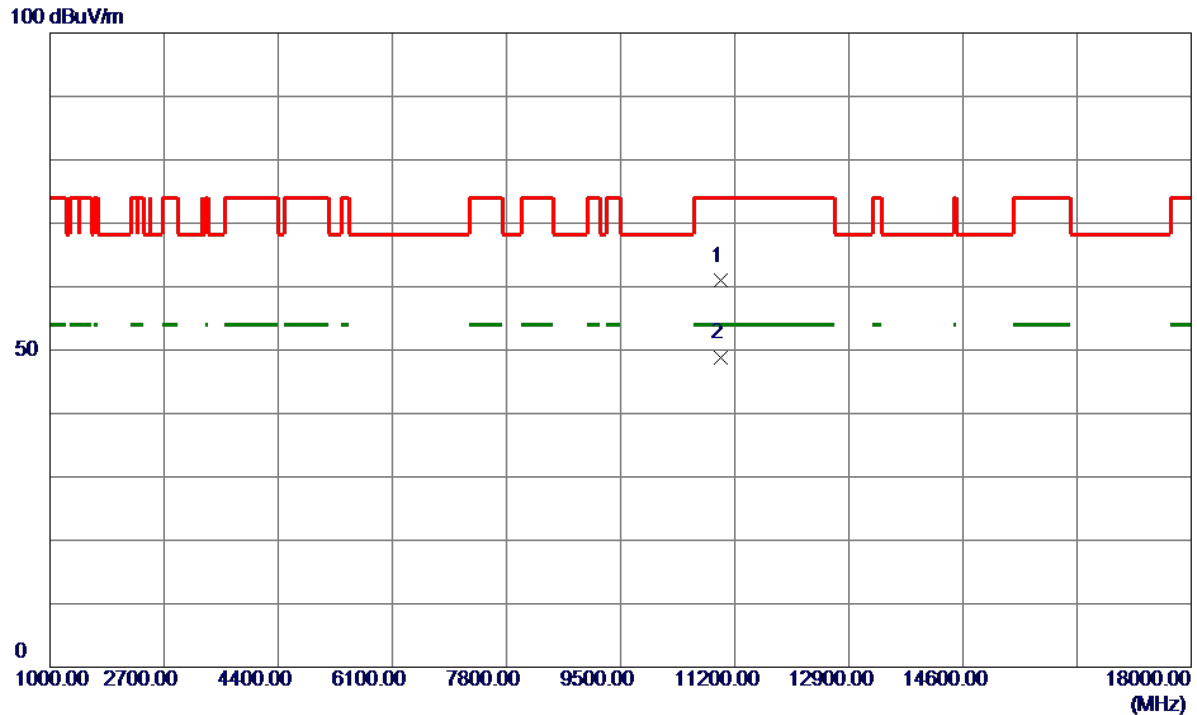


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10998.0400	51.13	9.77	60.90	74.00	-13.10	Peak	
2 *	10999.6000	38.98	9.77	48.75	54.00	-5.25	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

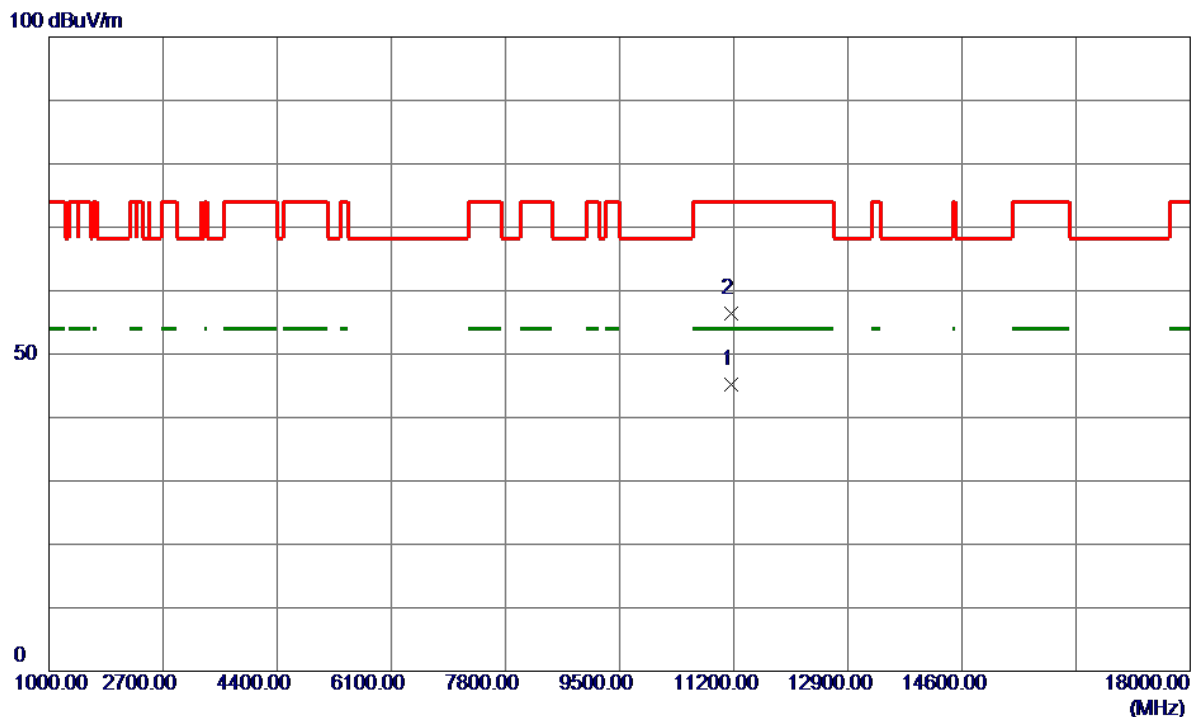


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11159.6000	35.62	9.55	45.17	54.00	-8.83	AVG	
2	11161.5599	46.86	9.54	56.40	74.00	-17.60	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

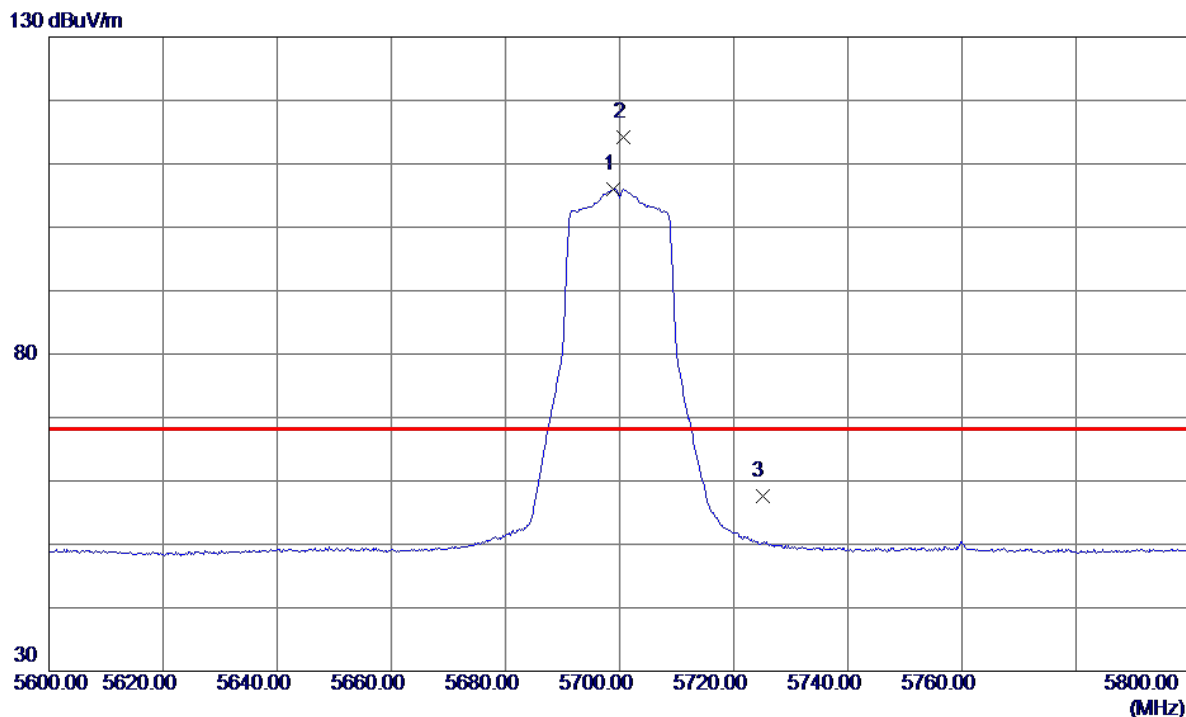


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5698.8000	89.42	16.60	106.02	999.00	-892.98	AVG	No Limit
2 *	5700.6000	97.58	16.61	114.19	68.20	45.99	Peak	No Limit
3	5725.0000	40.90	16.69	57.59	68.20	-10.61	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

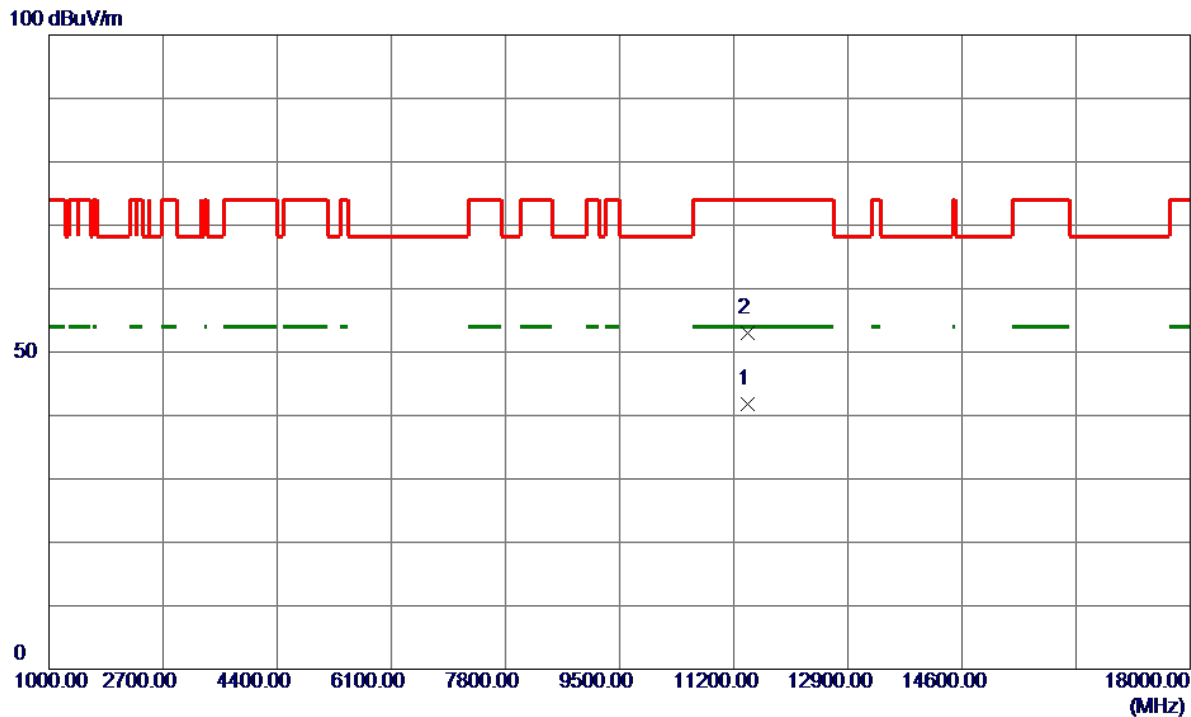


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11401.2400	32.66	9.21	41.87	54.00	-12.13	AVG	
2	11402.6400	43.74	9.21	52.95	74.00	-21.05	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

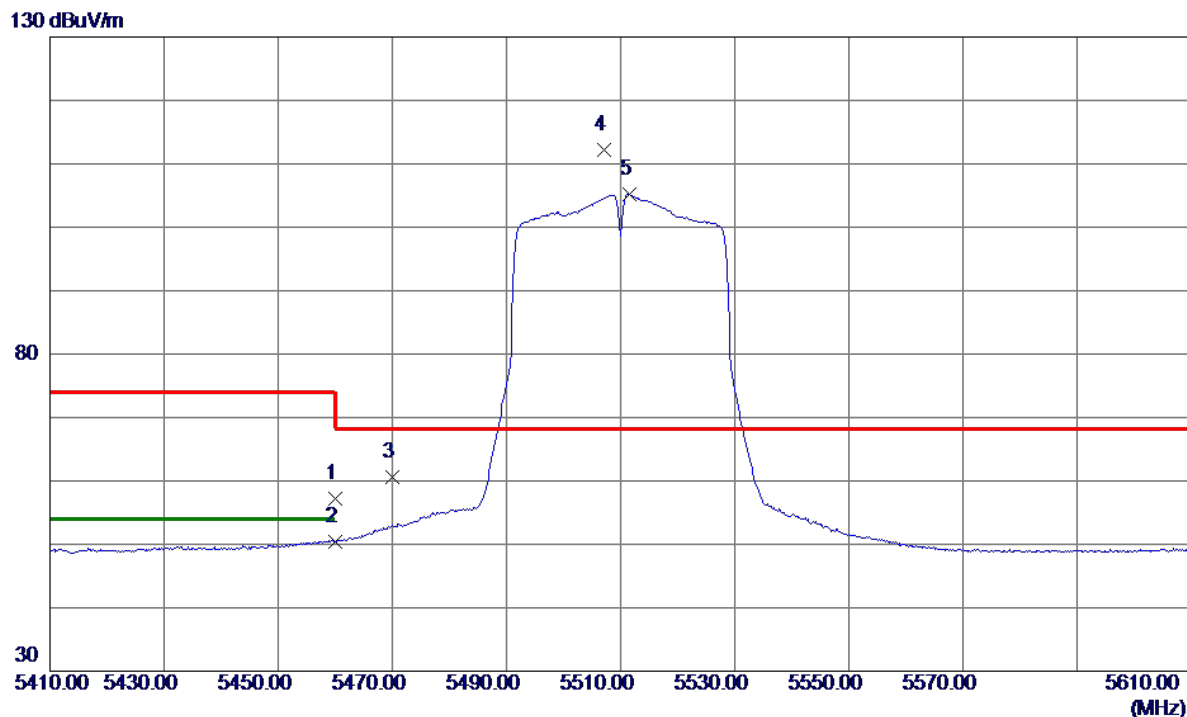


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	41.43	15.80	57.23	74.00	-16.77	Peak	
2	5460.0000	34.64	15.80	50.44	54.00	-3.56	AVG	
3	5470.0000	44.73	15.83	60.56	68.20	-7.64	Peak	
4 *	5507.2000	96.24	15.93	112.17	68.20	43.97	Peak	No Limit
5	5511.6000	89.21	15.95	105.16	999.00	-893.84	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

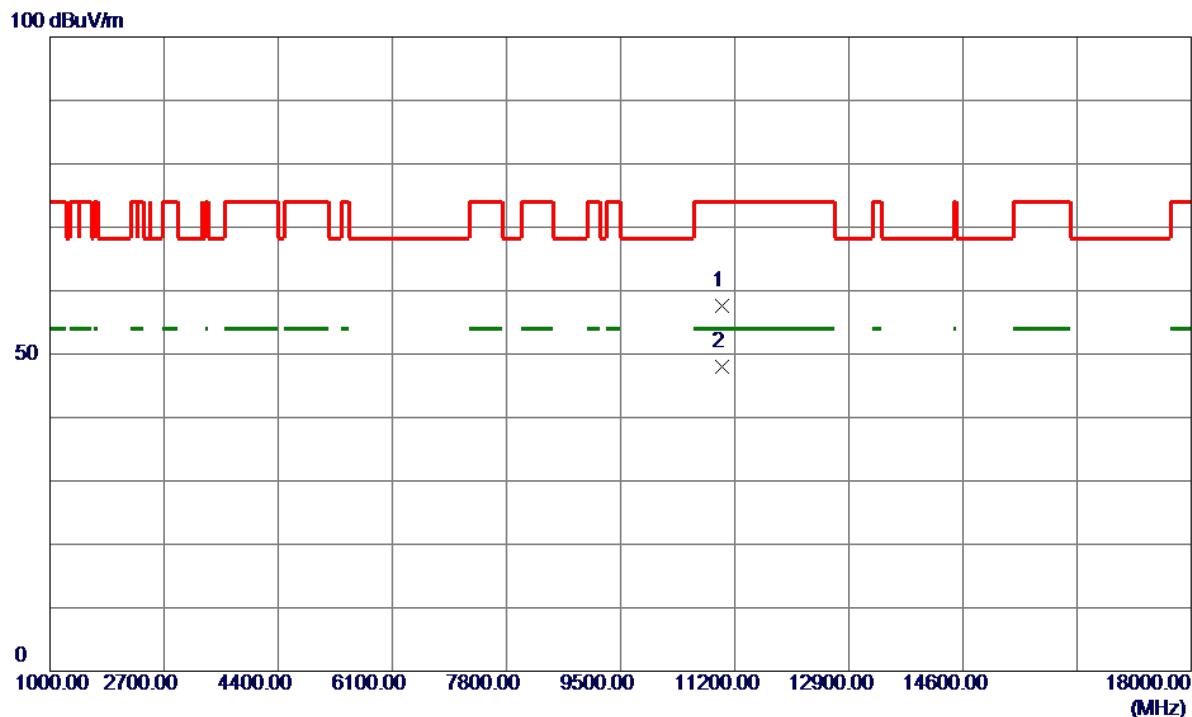


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11019.7500	47.93	9.74	57.67	74.00	-16.33	Peak	
2 *	11019.7500	38.27	9.74	48.01	54.00	-5.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

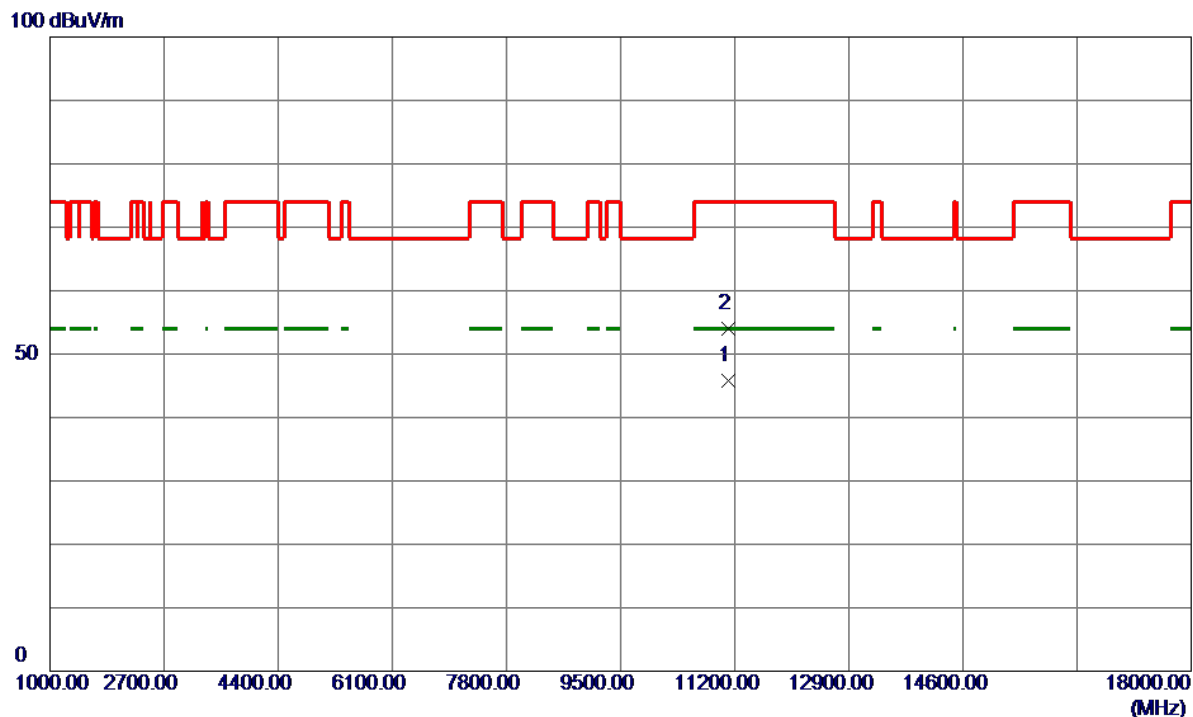


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11099.7500	36.11	9.63	45.74	54.00	-8.26	AVG	
2	11100.1500	44.31	9.63	53.94	74.00	-20.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

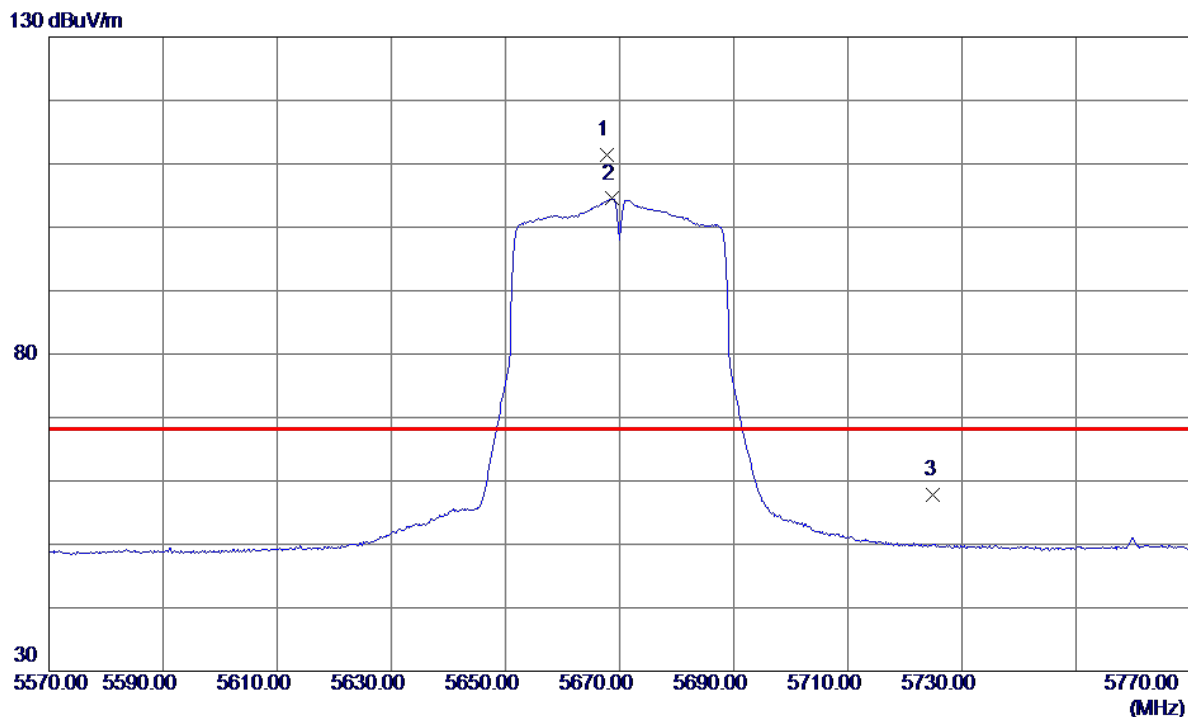


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5667.8000	94.97	16.49	111.46	68.20	43.26	Peak	No Limit
2	5668.6000	88.00	16.50	104.50	999.00	-894.50	AVG	No Limit
3	5725.0000	41.17	16.69	57.86	68.20	-10.34	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

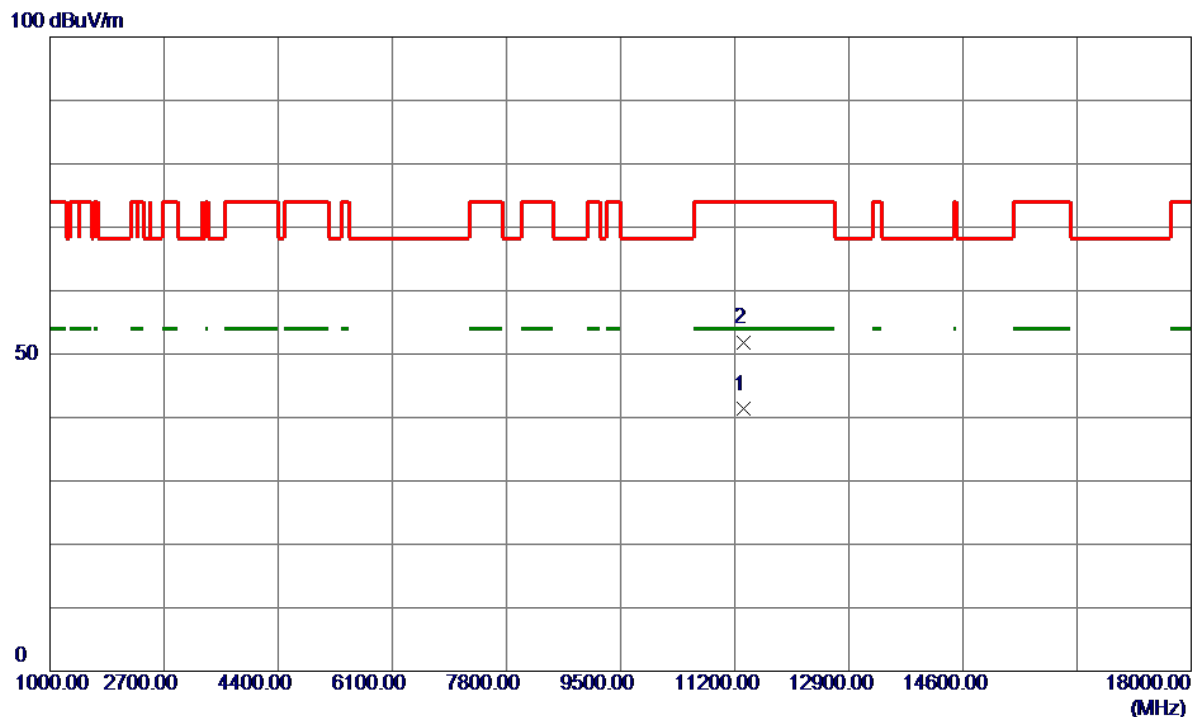


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11340.1000	32.01	9.29	41.30	54.00	-12.70	AVG	
2	11341.2500	42.44	9.29	51.73	74.00	-22.27	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

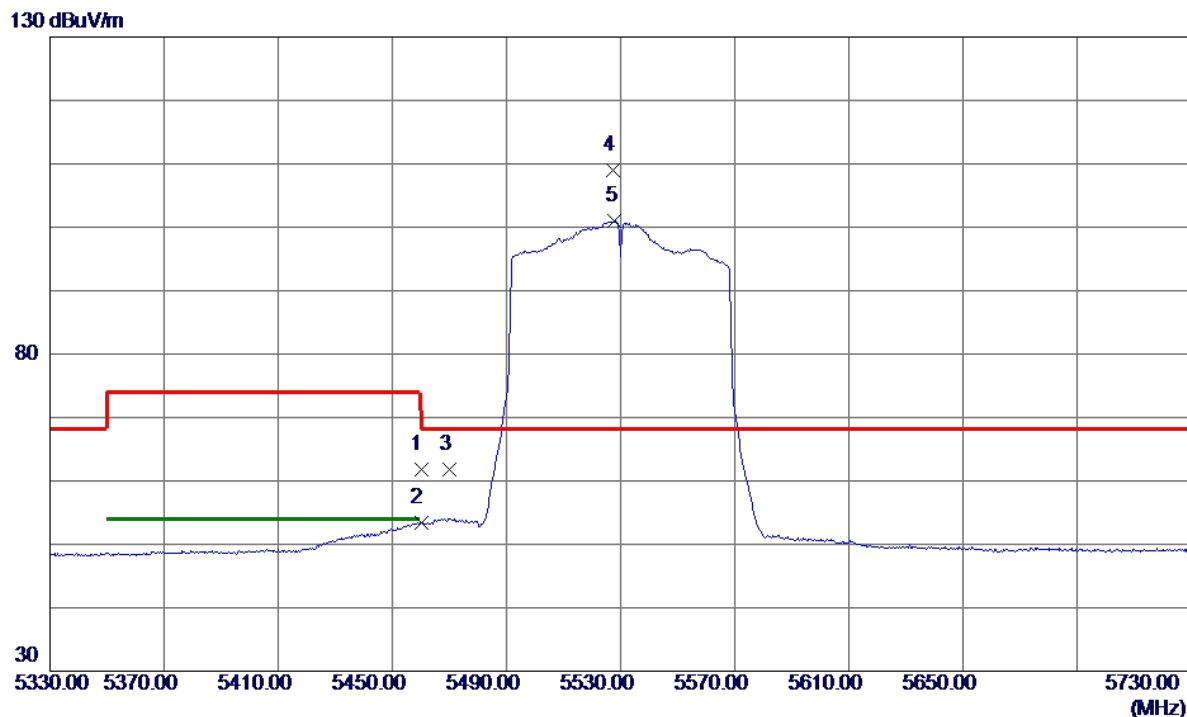


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	45.92	15.80	61.72	74.00	-12.28	Peak	
2	5460.0000	37.55	15.80	53.35	54.00	-0.65	AVG	
3	5470.0000	45.93	15.83	61.76	68.20	-6.44	Peak	
4 *	5527.2000	92.95	16.00	108.95	68.20	40.75	Peak	No Limit
5	5528.0000	84.98	16.00	100.98	999.00	-898.02	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

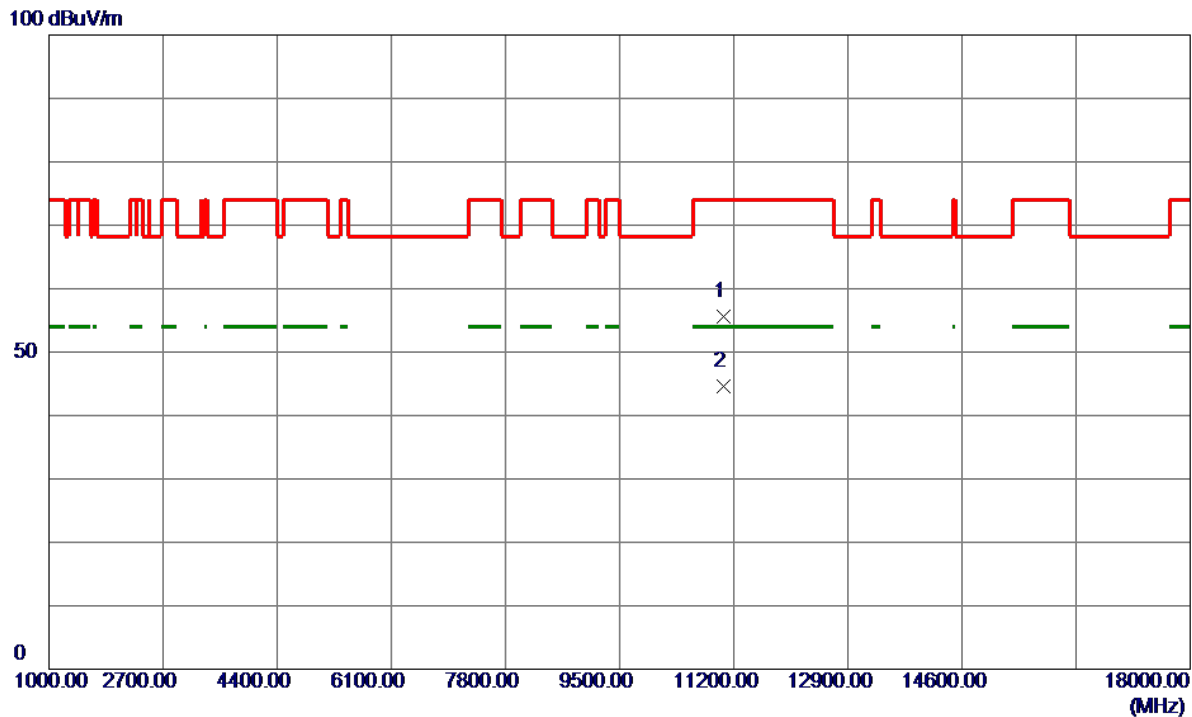


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11052.8500	45.88	9.70	55.58	74.00	-18.42	Peak	
2 *	11052.3000	34.94	9.70	44.64	54.00	-9.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

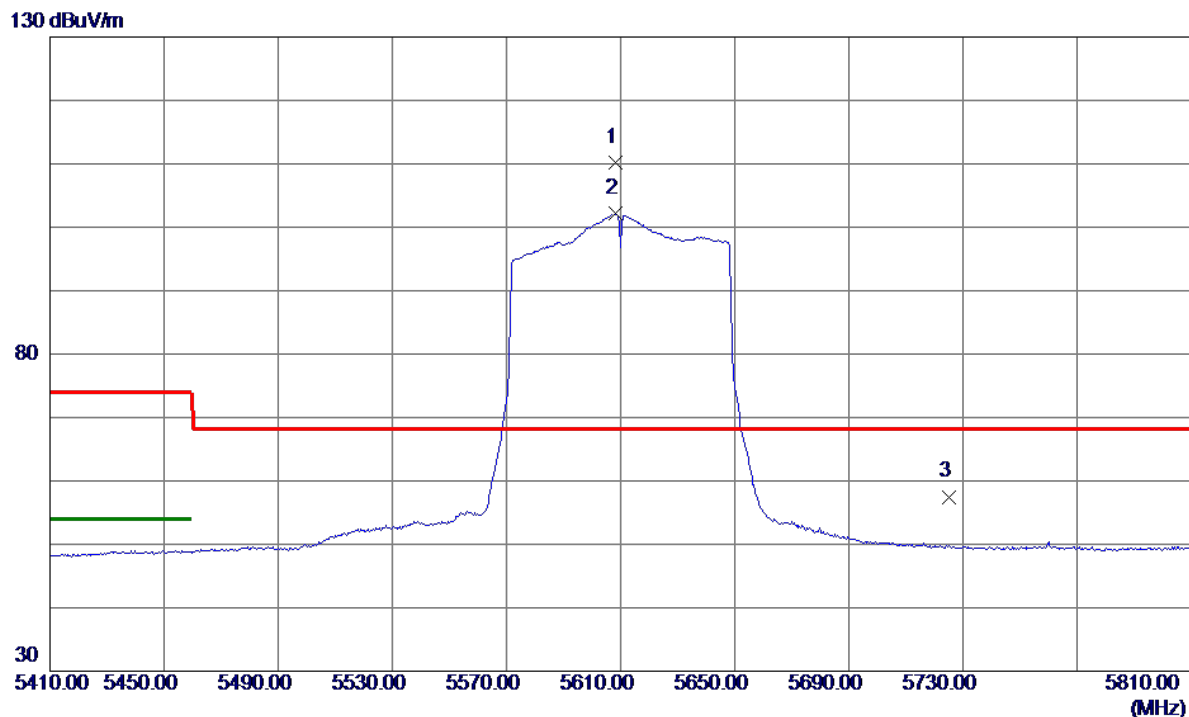


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5608.4000	93.84	16.29	110.13	68.20	41.93	Peak	No Limit
2	5608.4000	85.92	16.29	102.21	999.00	-896.79	AVG	No Limit
3	5725.0000	40.81	16.69	57.50	68.20	-10.70	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

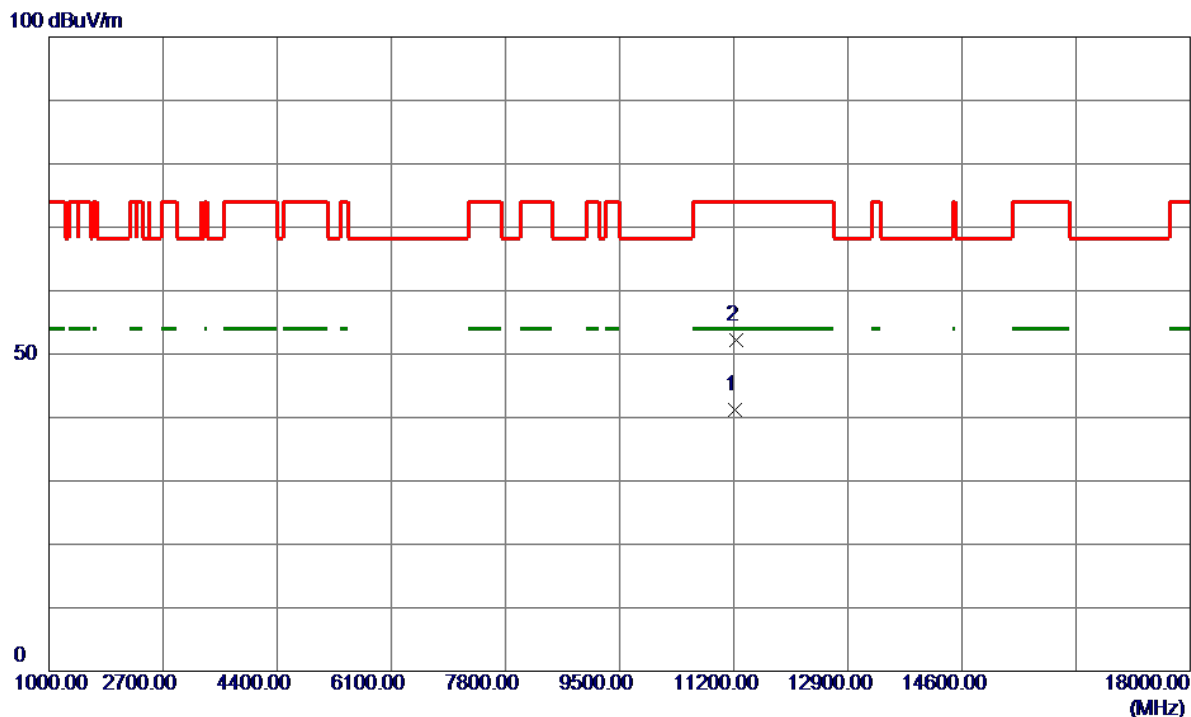


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11219.4500	31.65	9.46	41.11	54.00	-12.89	AVG	
2	11231.1500	42.78	9.45	52.23	74.00	-21.77	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

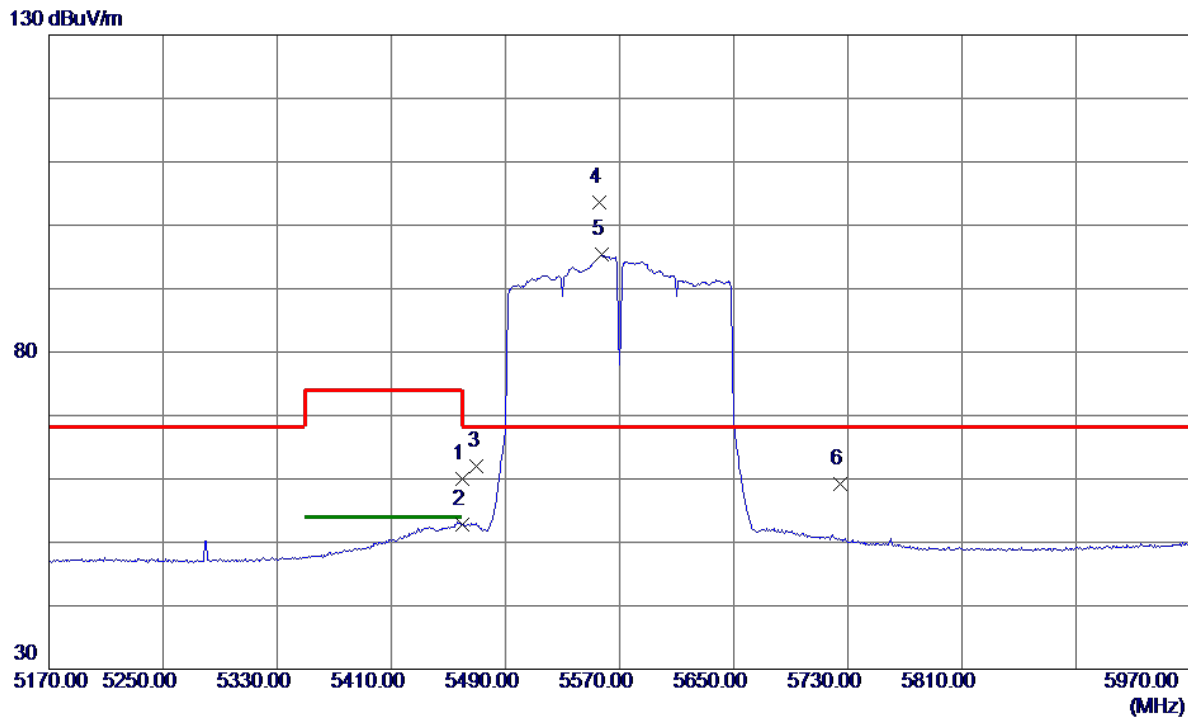


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	44.12	15.80	59.92	74.00	-14.08	Peak	
2	5460.0000	36.93	15.80	52.73	54.00	-1.27	AVG	
3	5470.0000	46.26	15.83	62.09	68.20	-6.11	Peak	
4 *	5555.6000	87.58	16.10	103.68	68.20	35.48	Peak	No Limit
5	5557.2000	79.21	16.11	95.32	999.00	-903.68	AVG	No Limit
6	5725.0000	42.50	16.69	59.19	68.20	-9.01	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

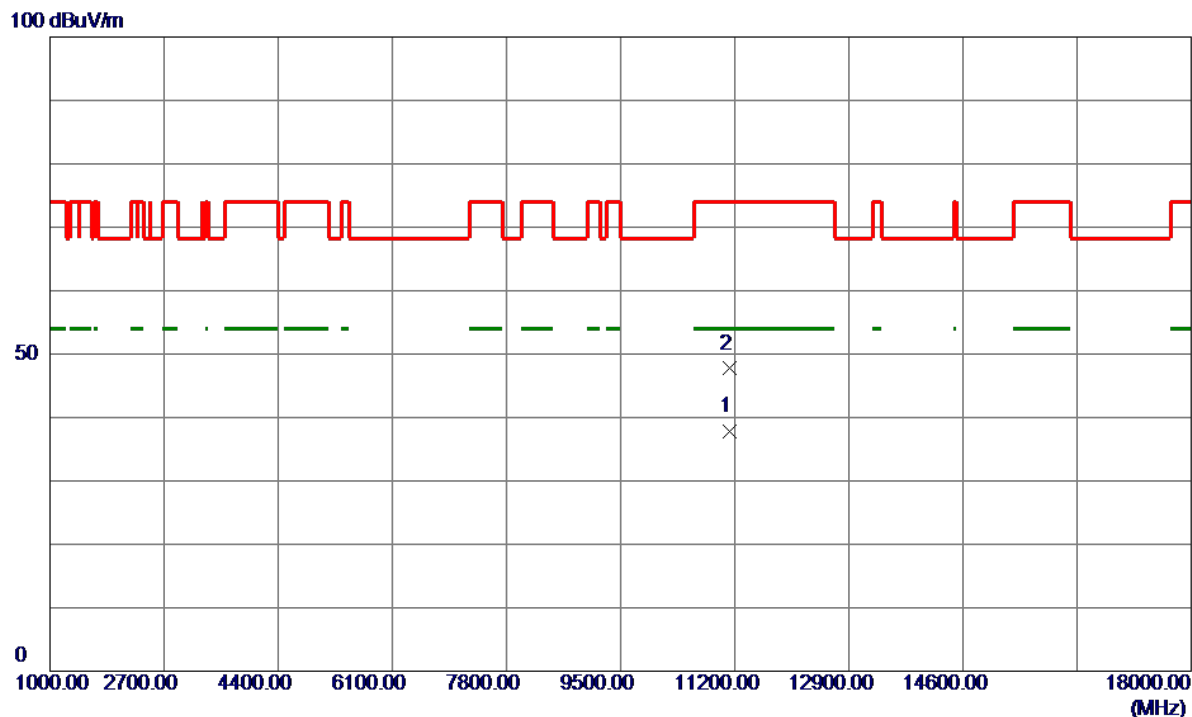


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11119.6800	28.13	9.60	37.73	54.00	-16.27	AVG	
2	11120.6400	38.10	9.60	47.70	74.00	-26.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

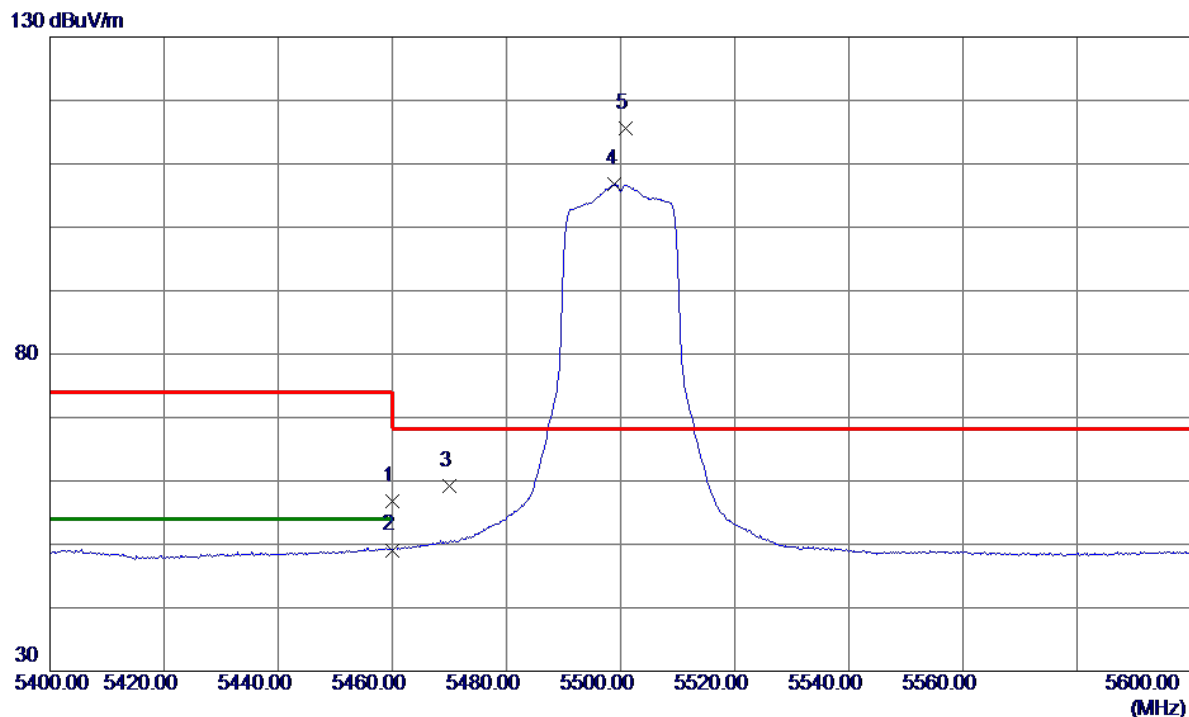


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	40.94	15.80	56.74	74.00	-17.26	Peak	
2	5460.0000	33.30	15.80	49.10	54.00	-4.90	AVG	
3	5470.0000	43.38	15.83	59.21	68.20	-8.99	Peak	
4	5499.0000	90.83	15.90	106.73	999.00	-892.27	AVG	No Limit
5 *	5500.8000	99.60	15.91	115.51	68.20	47.31	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

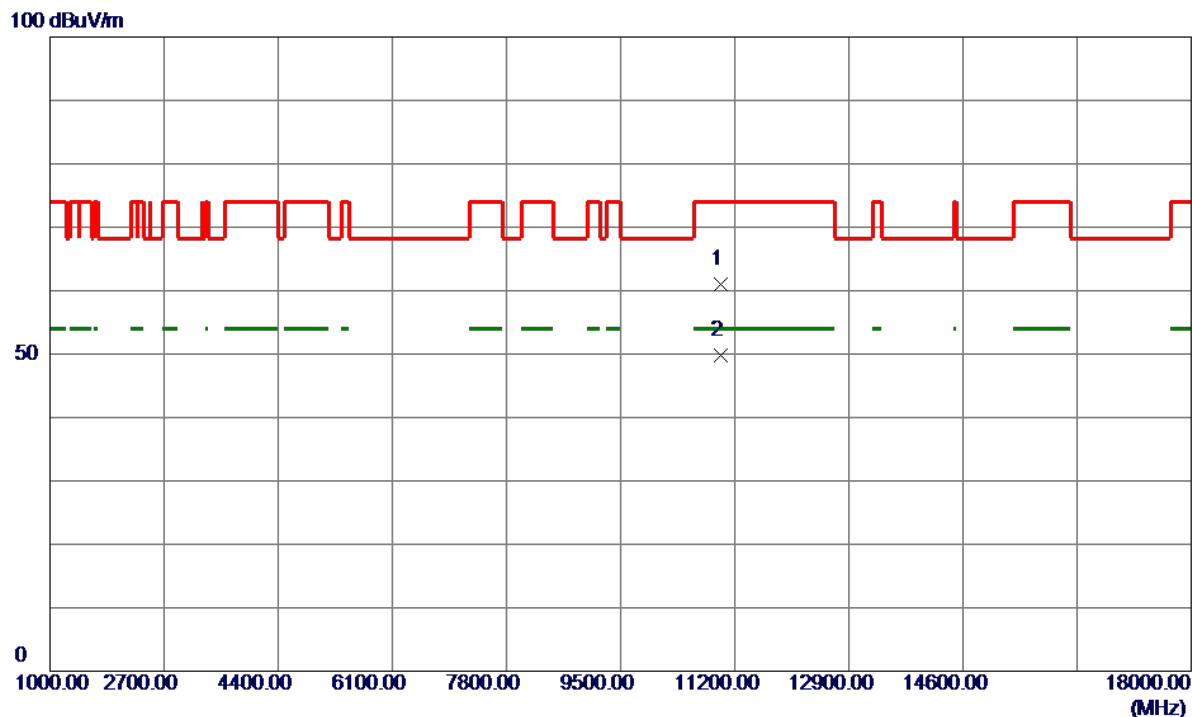


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10995.3500	51.18	9.76	60.94	74.00	-13.06	Peak	
2 *	10997.6900	40.12	9.77	49.89	54.00	-4.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

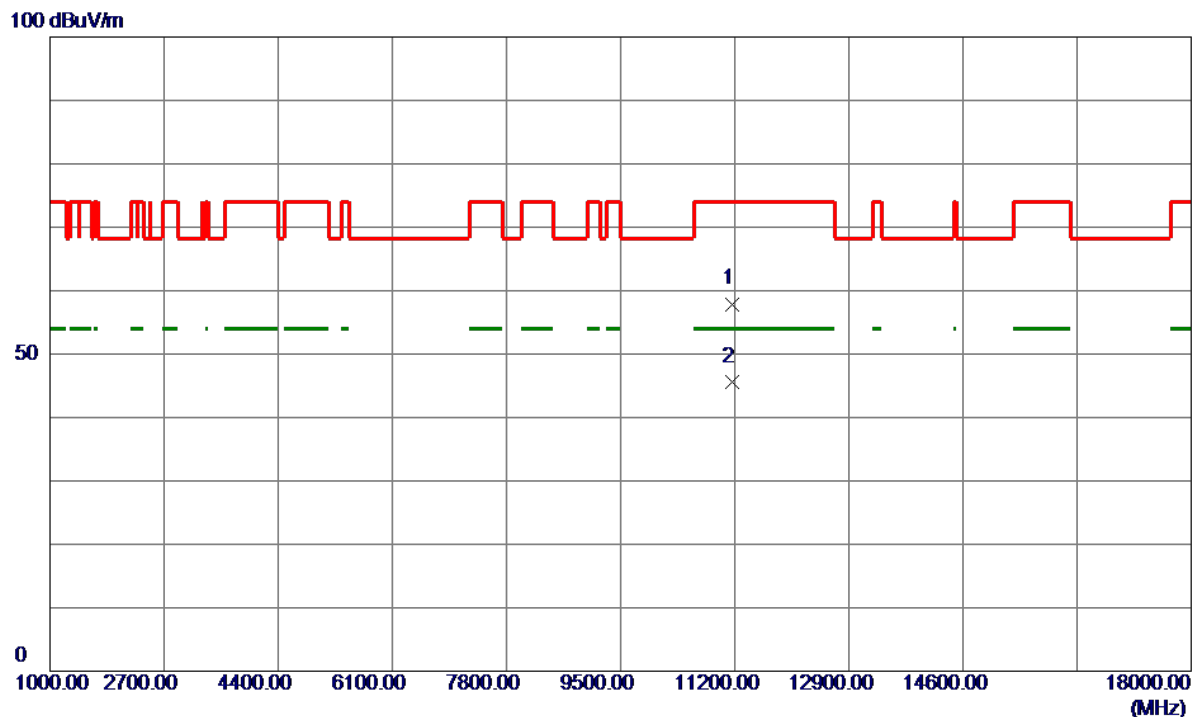


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11161.2300	48.36	9.54	57.90	74.00	-16.10	Peak	
2 *	11161.3800	36.05	9.54	45.59	54.00	-8.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

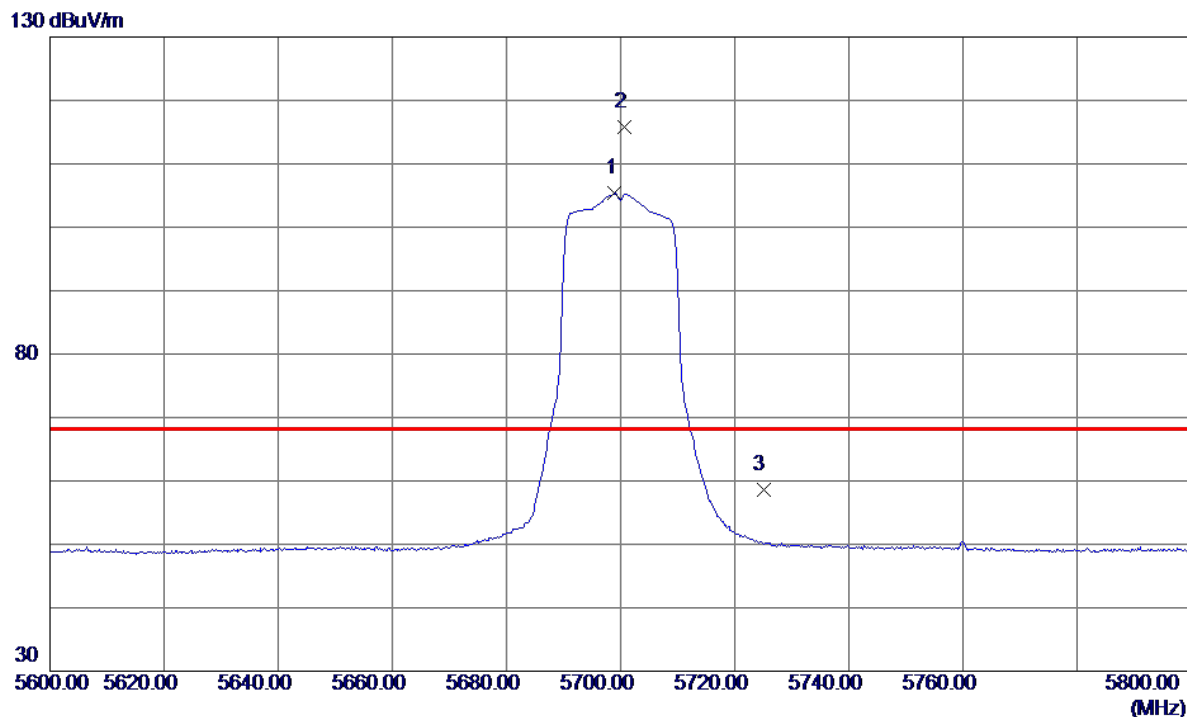


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5699.0000	88.79	16.60	105.39	999.00	-893.61	AVG	No Limit
2 *	5700.6000	99.25	16.61	115.86	68.20	47.66	Peak	No Limit
3	5725.0000	41.83	16.69	58.52	68.20	-9.68	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

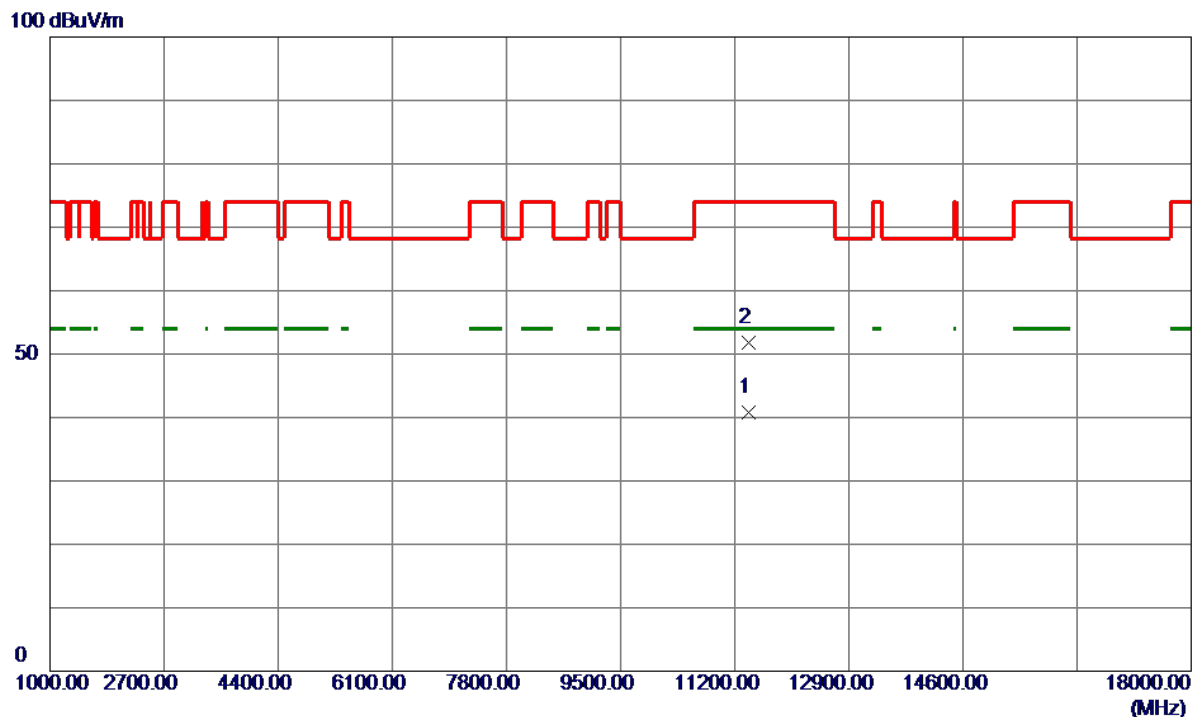


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11400.2699	31.64	9.21	40.85	54.00	-13.15	AVG	
2	11401.0199	42.65	9.21	51.86	74.00	-22.14	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

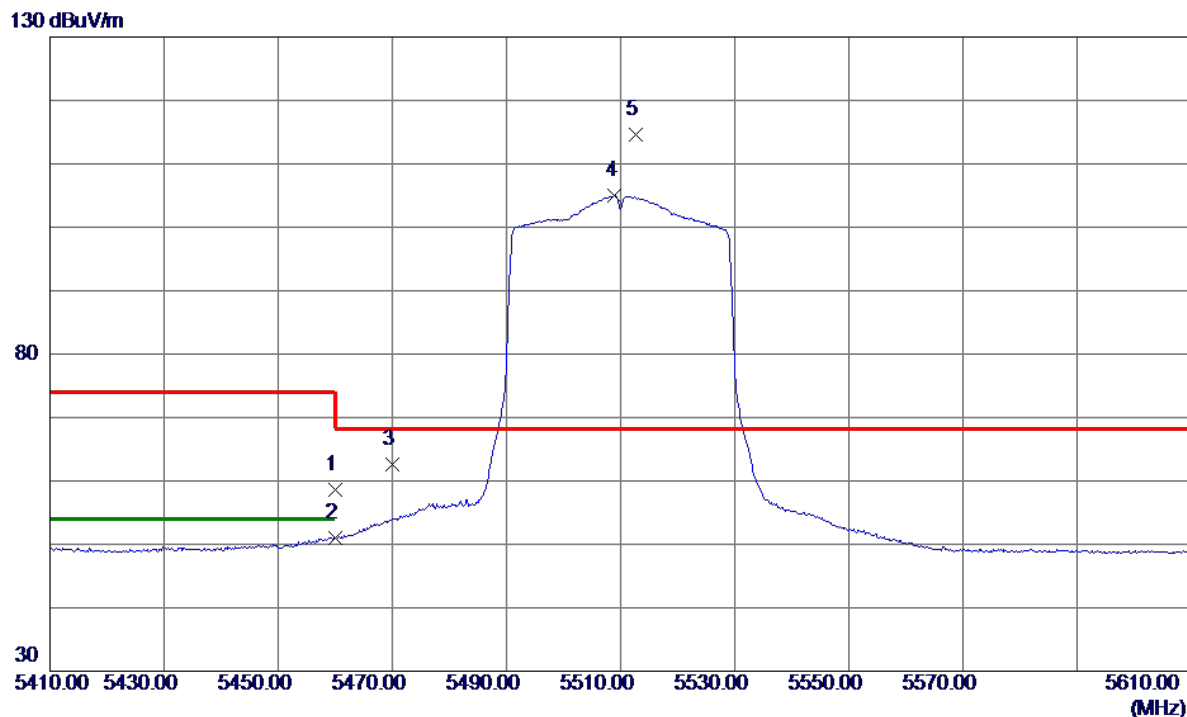


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	42.78	15.80	58.58	74.00	-15.42	Peak	
2	5460.0000	35.22	15.80	51.02	54.00	-2.98	AVG	
3	5470.0000	46.79	15.83	62.62	68.20	-5.58	Peak	
4	5509.0000	89.04	15.94	104.98	999.00	-894.02	AVG	No Limit
5 *	5512.6000	98.69	15.95	114.64	68.20	46.44	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

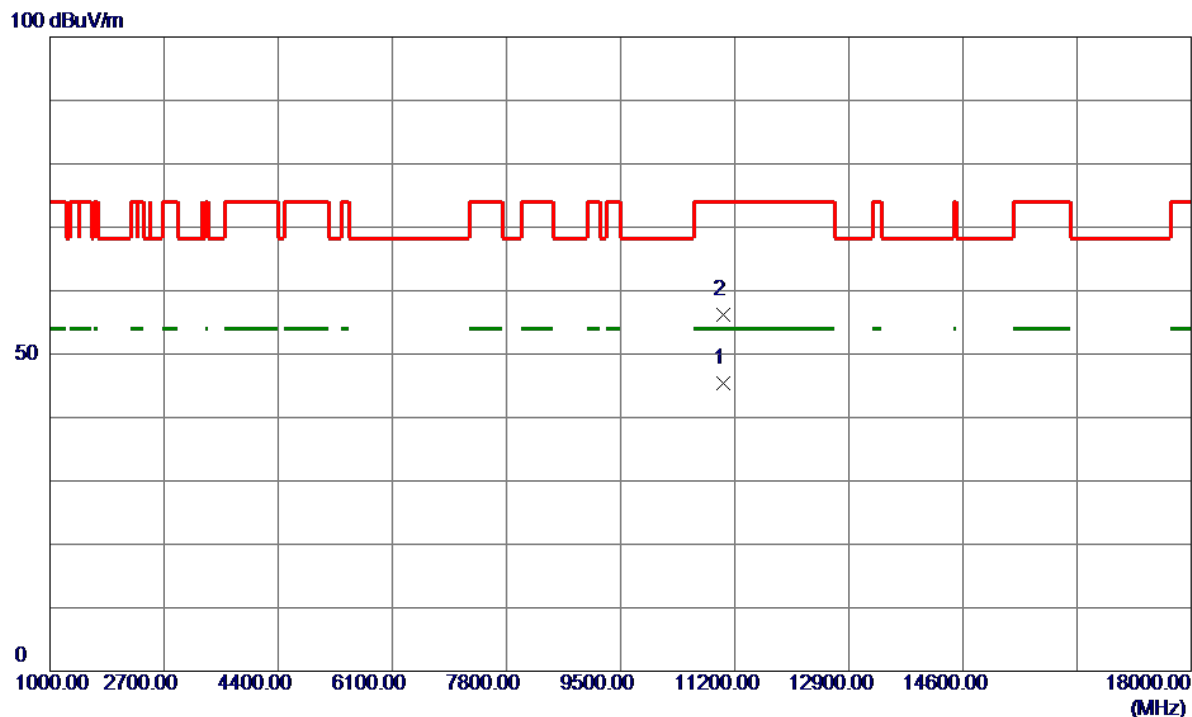


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11020.6400	35.58	9.74	45.32	54.00	-8.68	AVG	
2	11020.8400	46.45	9.74	56.19	74.00	-17.81	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

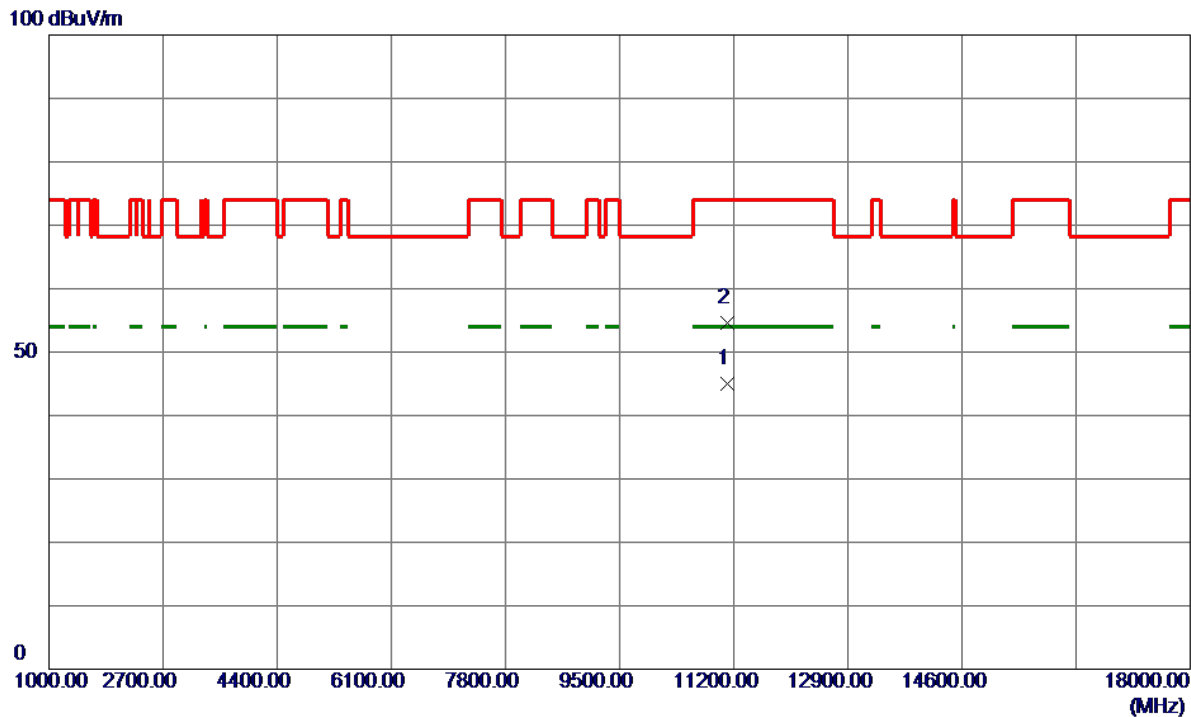


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11099.8800	35.32	9.63	44.95	54.00	-9.05	AVG	
2	11101.6000	45.06	9.63	54.69	74.00	-19.31	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

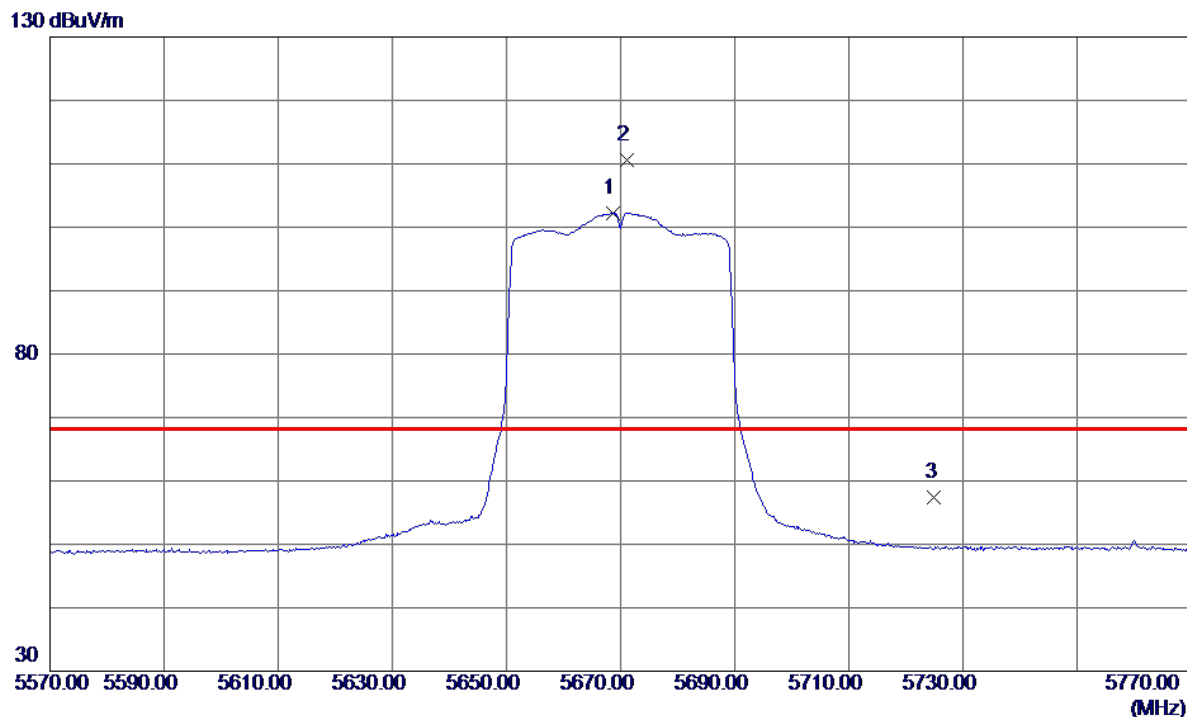


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5668.6000	85.77	16.50	102.27	999.00	-896.73	AVG	No Limit
2 *	5671.2000	94.14	16.51	110.65	68.20	42.45	Peak	No Limit
3	5725.0000	40.80	16.69	57.49	68.20	-10.71	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

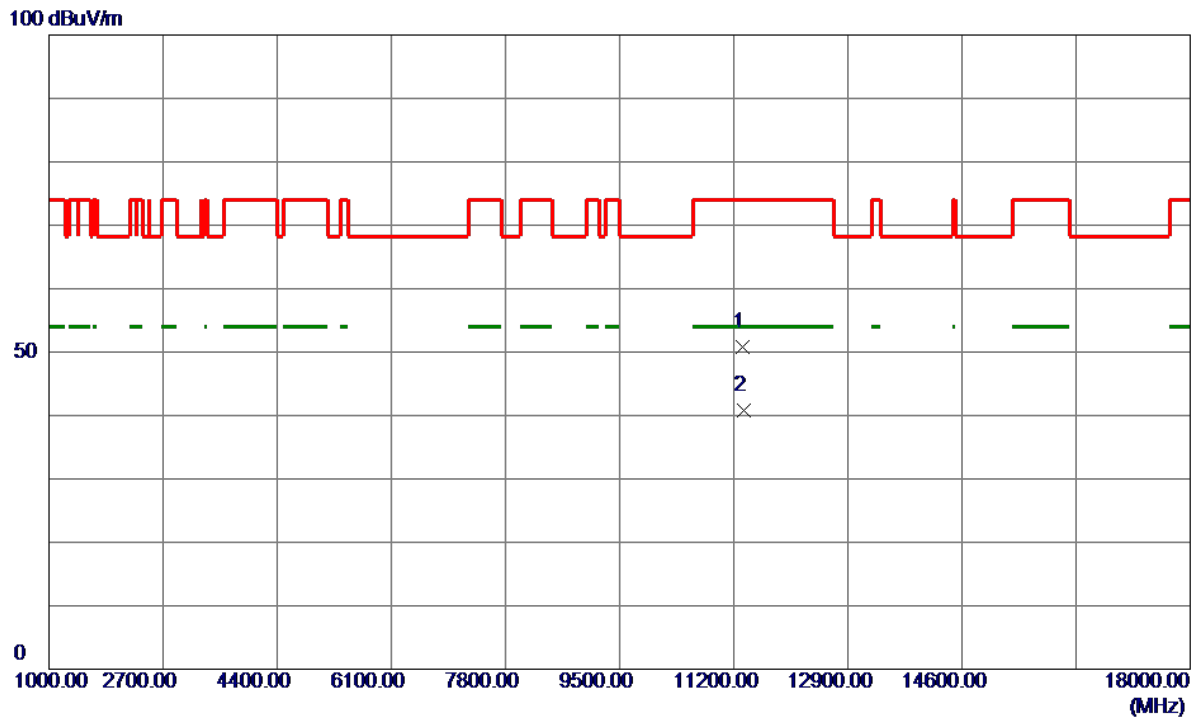


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11341.0400	41.54	9.29	50.83	74.00	-23.17	Peak	
2 *	11341.7200	31.46	9.29	40.75	54.00	-13.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

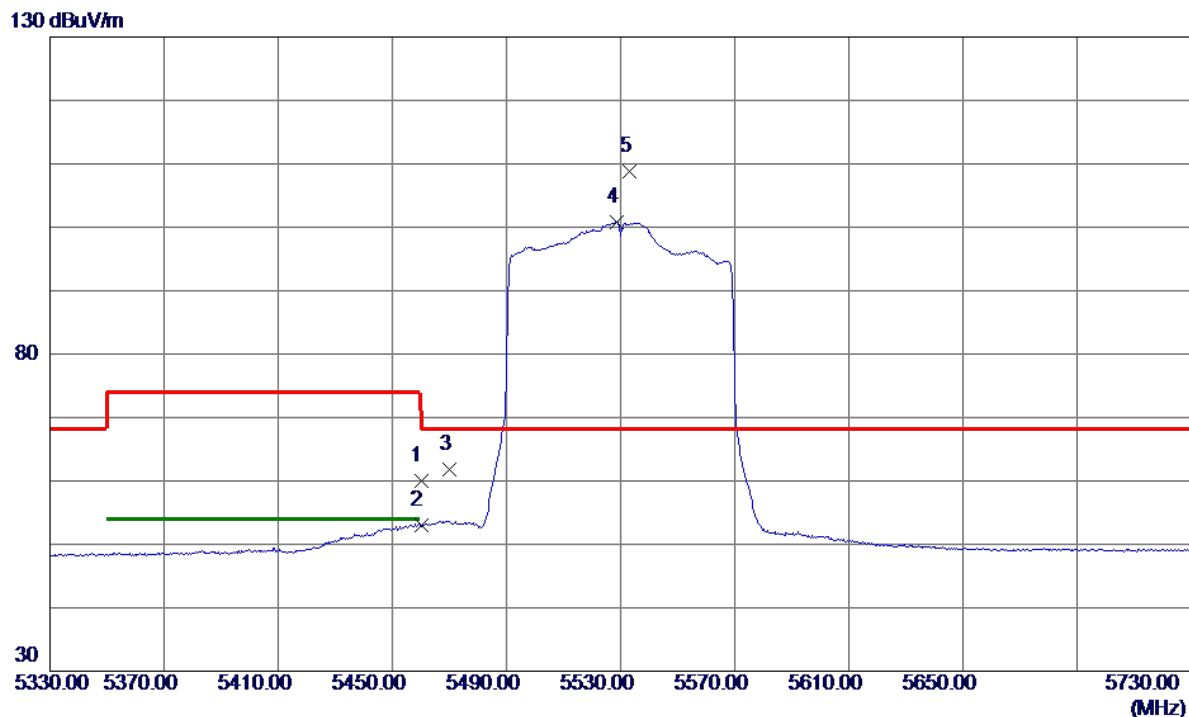


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	44.29	15.80	60.09	74.00	-13.91	Peak	
2	5460.0000	37.14	15.80	52.94	54.00	-1.06	AVG	
3	5470.0000	45.90	15.83	61.73	68.20	-6.47	Peak	
4	5528.8000	84.76	16.01	100.77	999.00	-898.23	AVG	No Limit
5 *	5533.2000	92.70	16.02	108.72	68.20	40.52	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

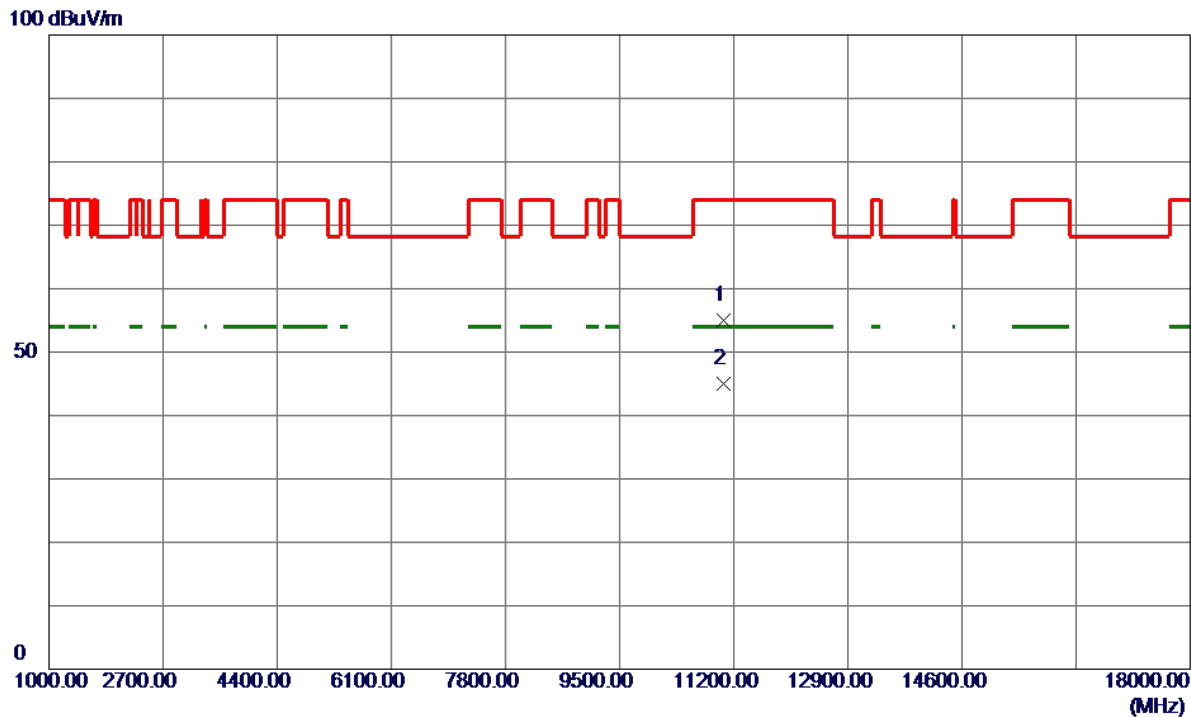


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11050.5199	45.25	9.70	54.95	74.00	-19.05	Peak	
2 *	11051.9600	35.38	9.70	45.08	54.00	-8.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

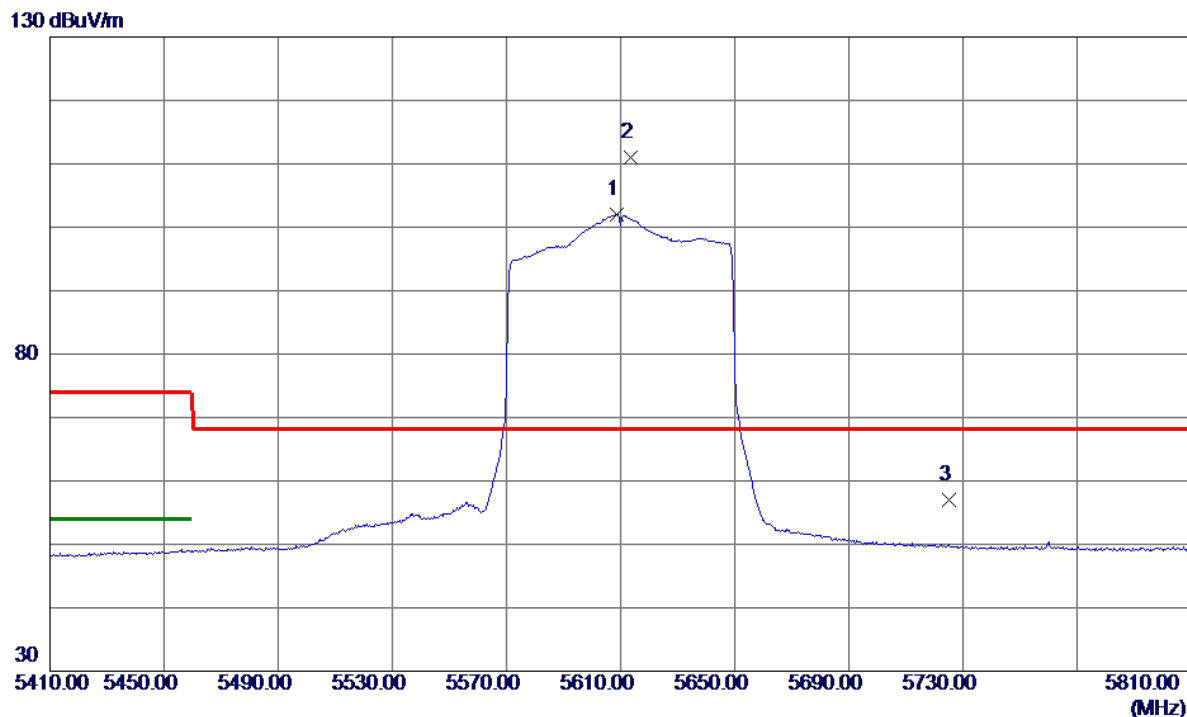


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5608.8000	85.73	16.29	102.02	999.00	-896.98	AVG	No Limit
2 *	5613.6000	94.70	16.30	111.00	68.20	42.80	Peak	No Limit
3	5725.0000	40.26	16.69	56.95	68.20	-11.25	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

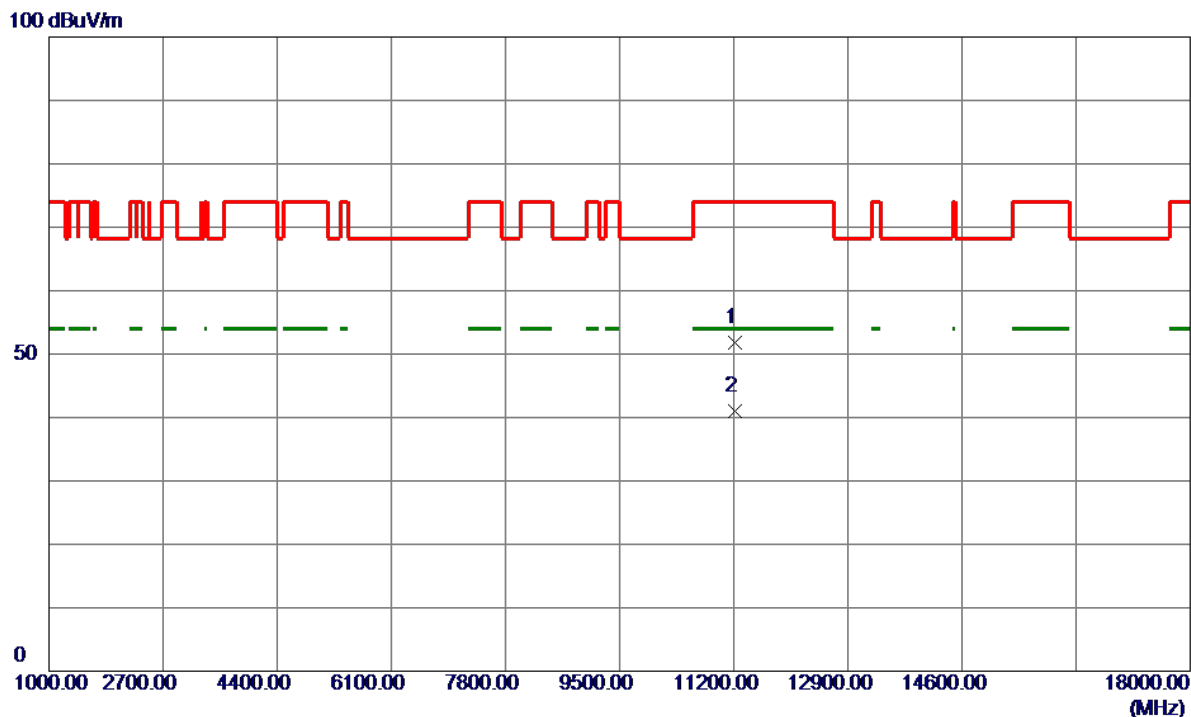


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11221.2800	42.39	9.46	51.85	74.00	-22.15	Peak	
2 *	11221.3200	31.63	9.46	41.09	54.00	-12.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE160) Mode 5570 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

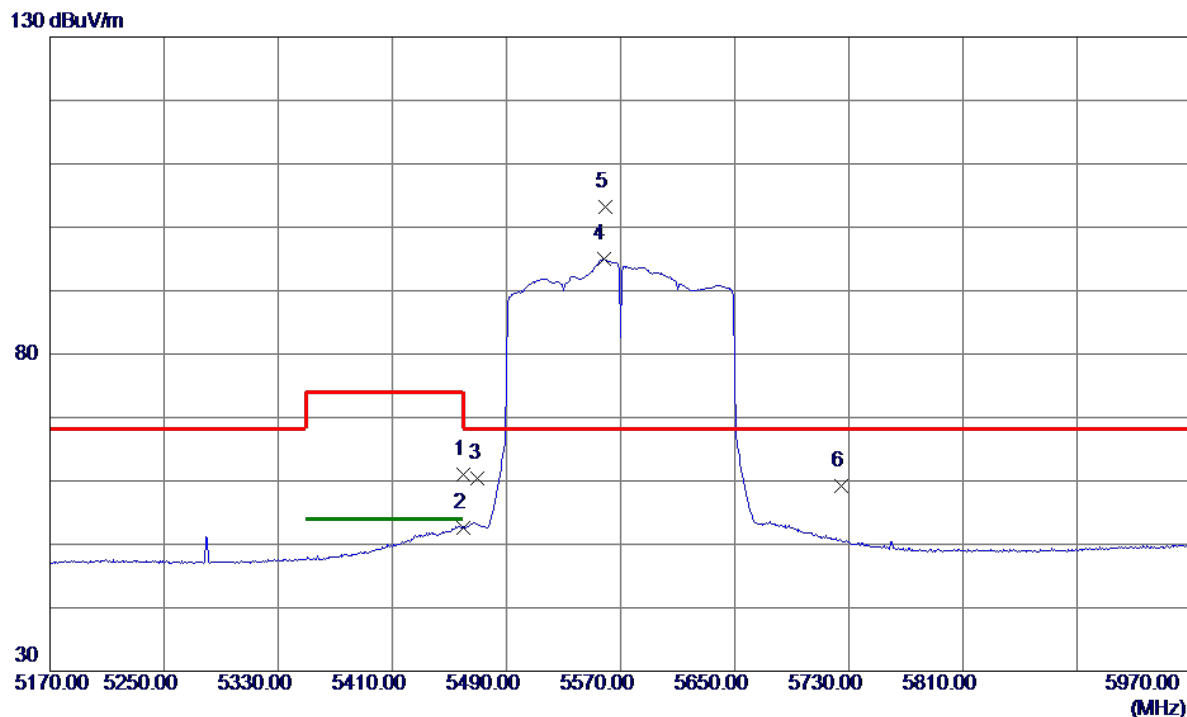


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	45.24	15.80	61.04	74.00	-12.96	Peak	
2	5460.0000	36.77	15.80	52.57	54.00	-1.43	AVG	
3	5470.0000	44.64	15.83	60.47	68.20	-7.73	Peak	
4	5558.0000	78.88	16.11	94.99	999.00	-904.01	AVG	No Limit
5 *	5559.6000	87.14	16.11	103.25	68.20	35.05	Peak	No Limit
6	5725.0000	42.51	16.69	59.20	68.20	-9.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE160) Mode 5570 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

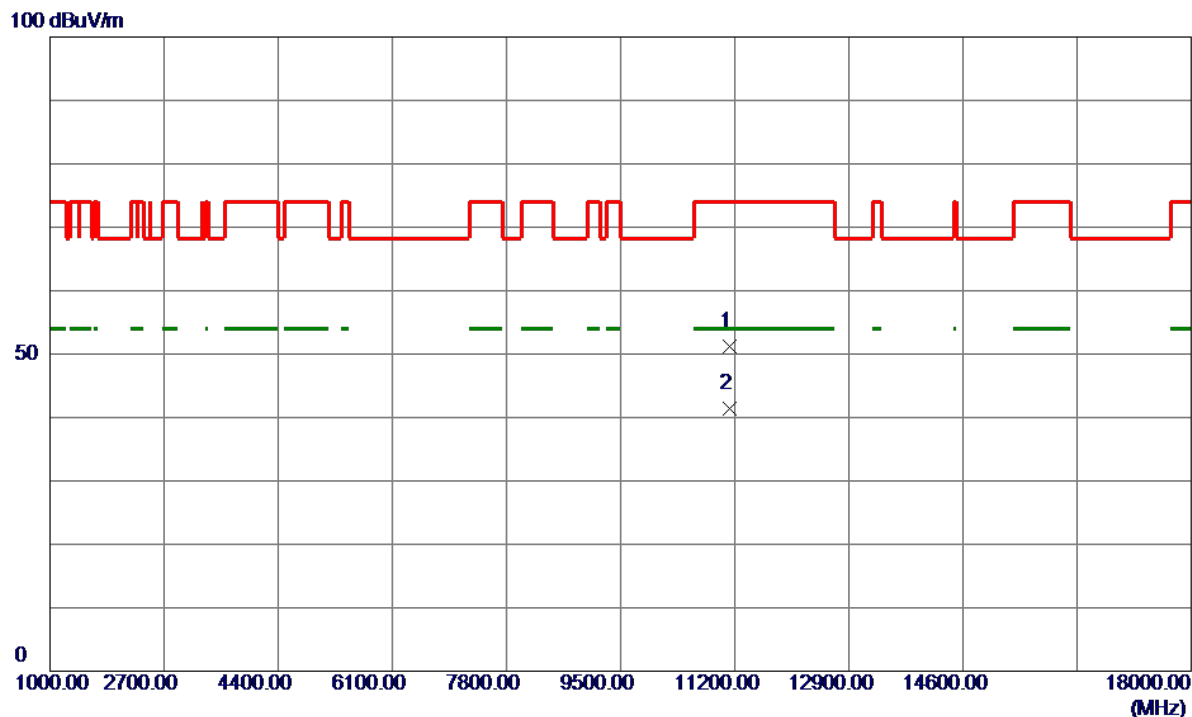


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11127.0000	41.63	9.59	51.22	74.00	-22.78	Peak	
2 *	11128.7200	31.77	9.59	41.36	54.00	-12.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

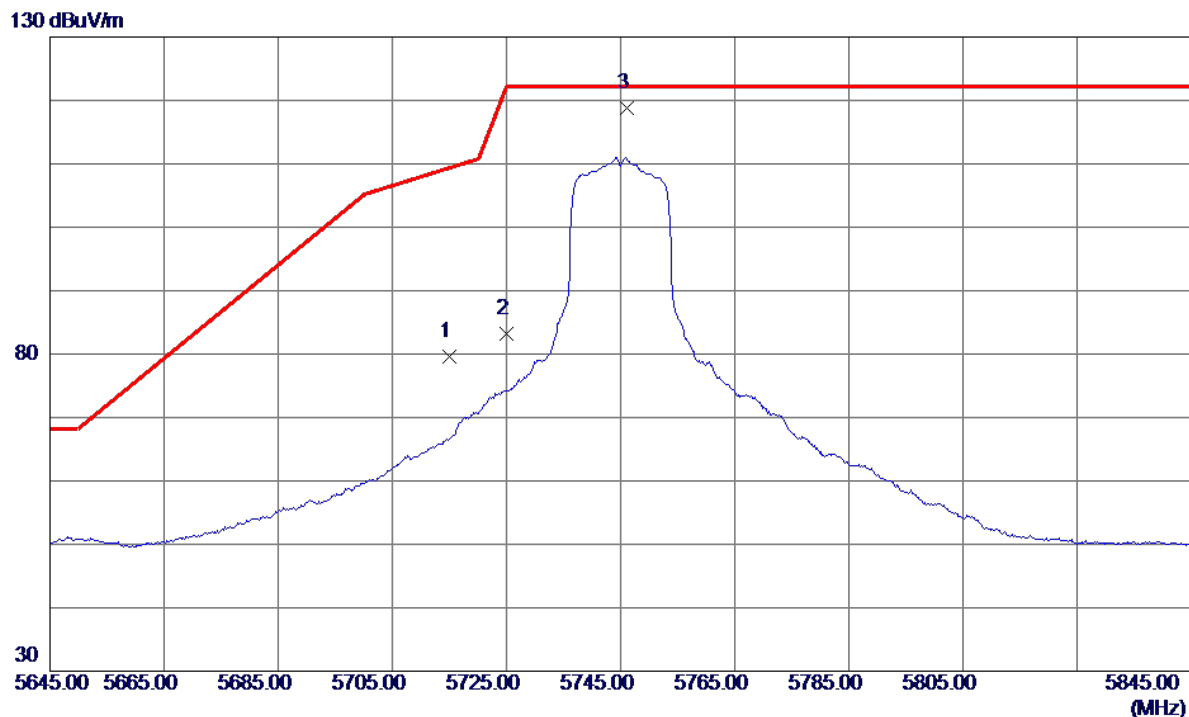


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	62.87	16.66	79.53	109.40	-29.87	Peak	
2	5725.0000	66.44	16.69	83.13	122.20	-39.07	Peak	
3 *	5746.2000	102.01	16.77	118.78	122.20	-3.42	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

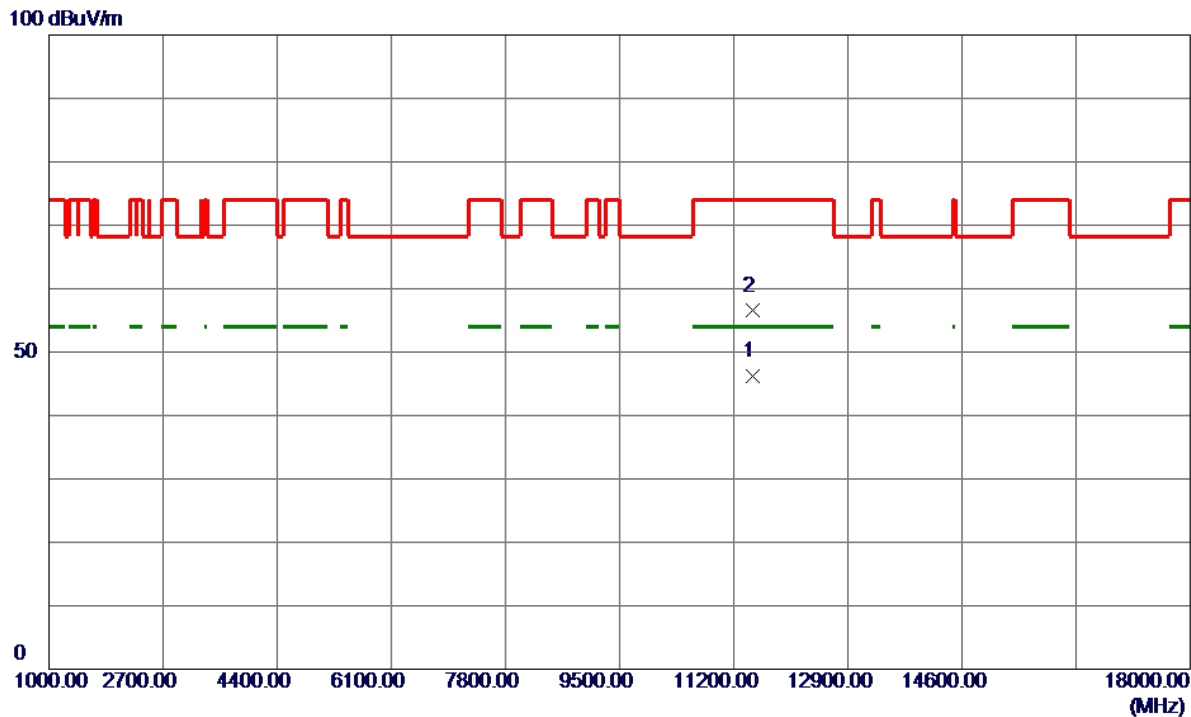


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11491.5599	37.05	9.08	46.13	54.00	-7.87	AVG	
2	11491.8300	47.42	9.08	56.50	74.00	-17.50	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

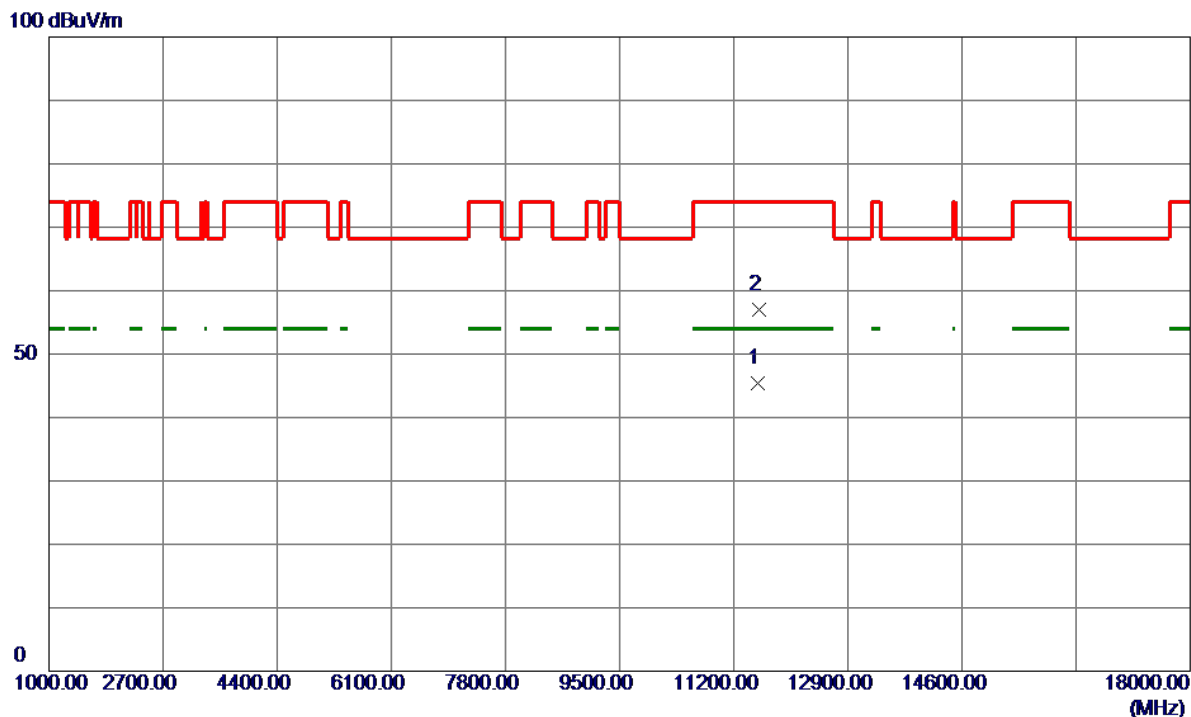


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11566.1300	36.29	9.20	45.49	54.00	-8.51	AVG	
2	11571.2300	47.72	9.21	56.93	74.00	-17.07	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

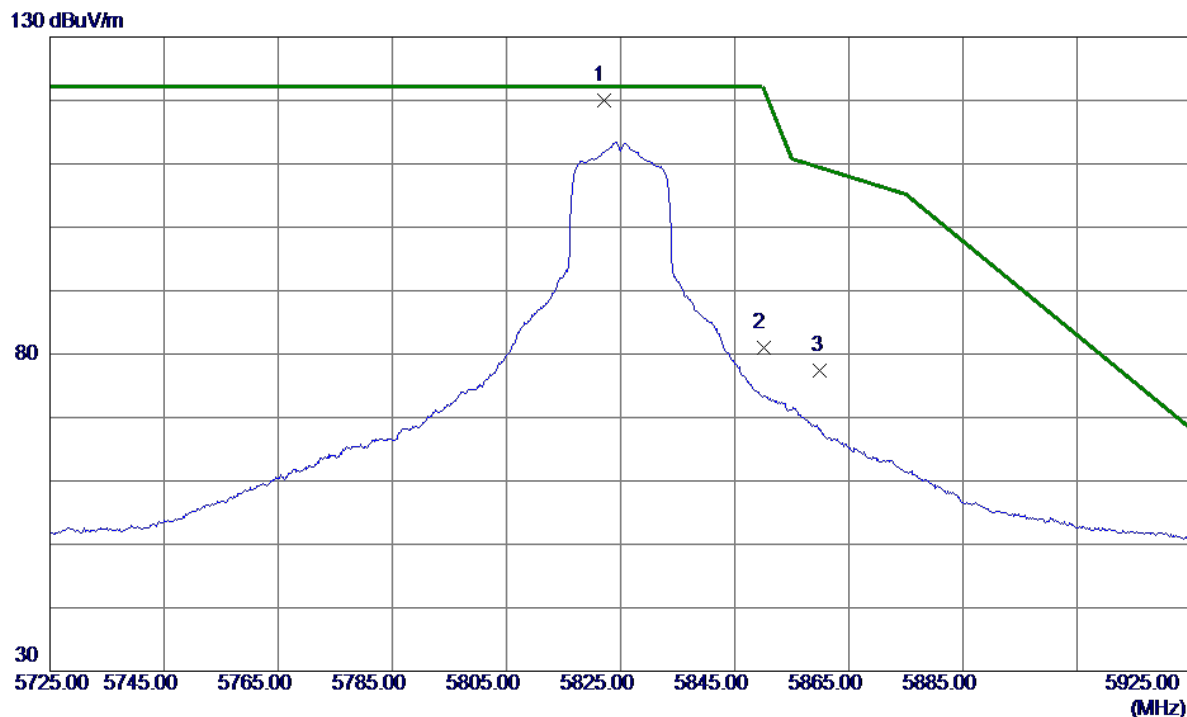


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5822.0000	102.88	17.04	119.92	122.20	-2.28	Peak	No Limit
2	5850.0000	63.88	17.13	81.01	122.20	-41.19	Peak	
3	5860.0000	60.26	17.17	77.43	109.40	-31.97	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

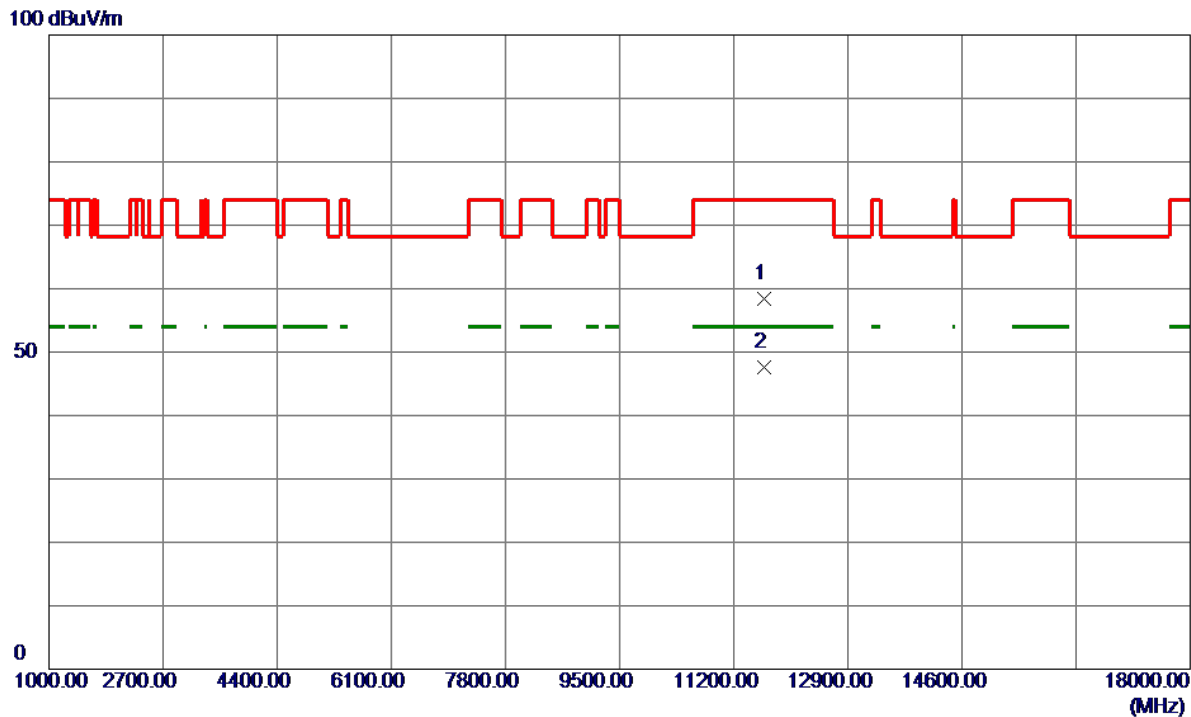


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11651.2600	49.11	9.36	58.47	74.00	-15.53	Peak	
2 *	11651.6200	38.15	9.36	47.51	54.00	-6.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

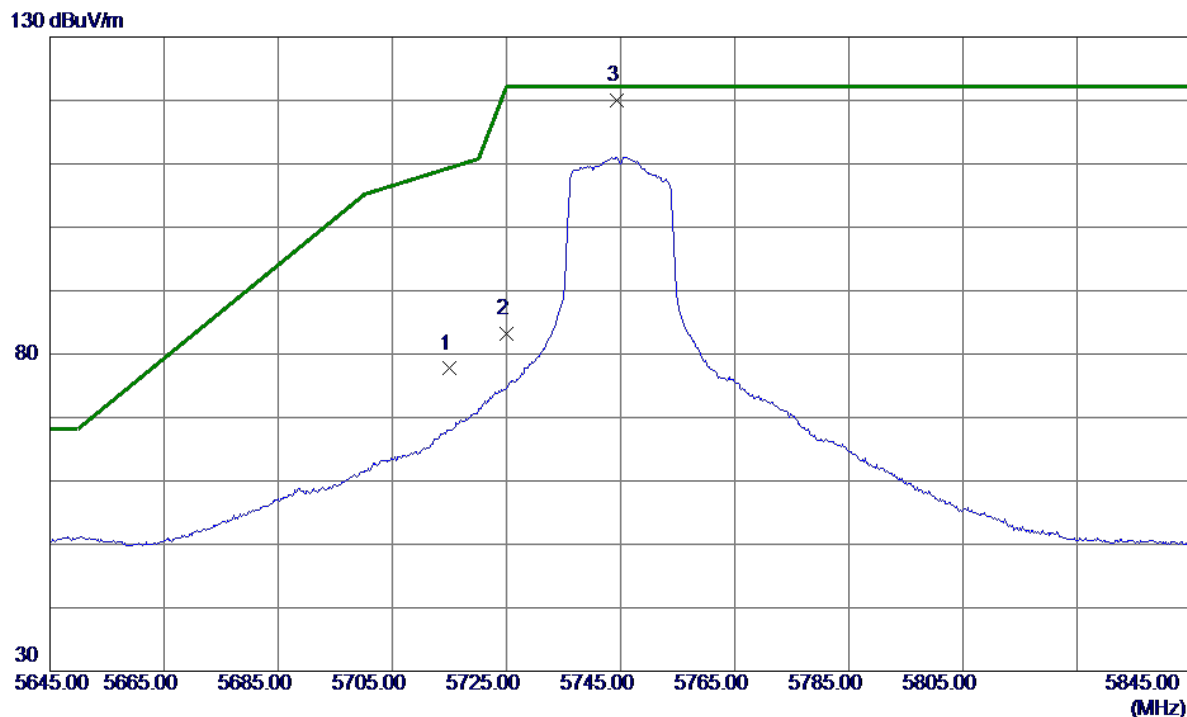


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	61.04	16.66	77.70	109.40	-31.70	Peak	
2	5725.0000	66.55	16.69	83.24	122.20	-38.96	Peak	
3 *	5744.4000	103.28	16.76	120.04	122.20	-2.16	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

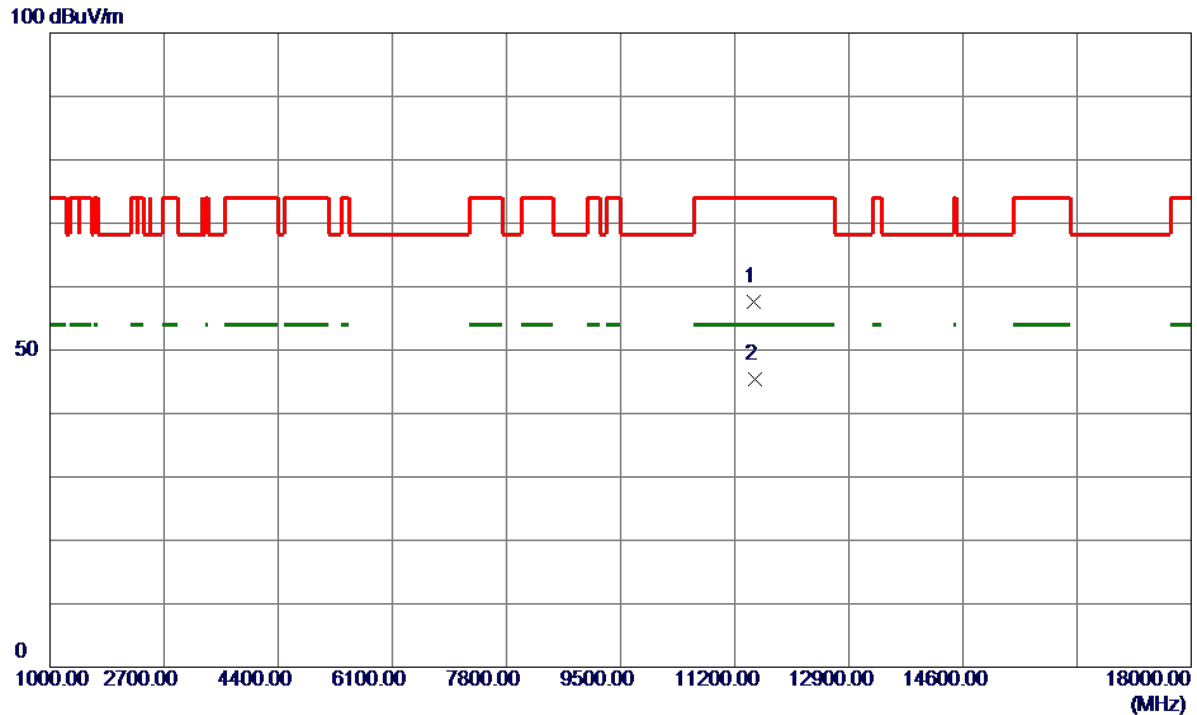


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11482.0000	48.56	9.10	57.66	74.00	-16.34	Peak	
2 *	11493.0400	36.27	9.08	45.35	54.00	-8.65	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

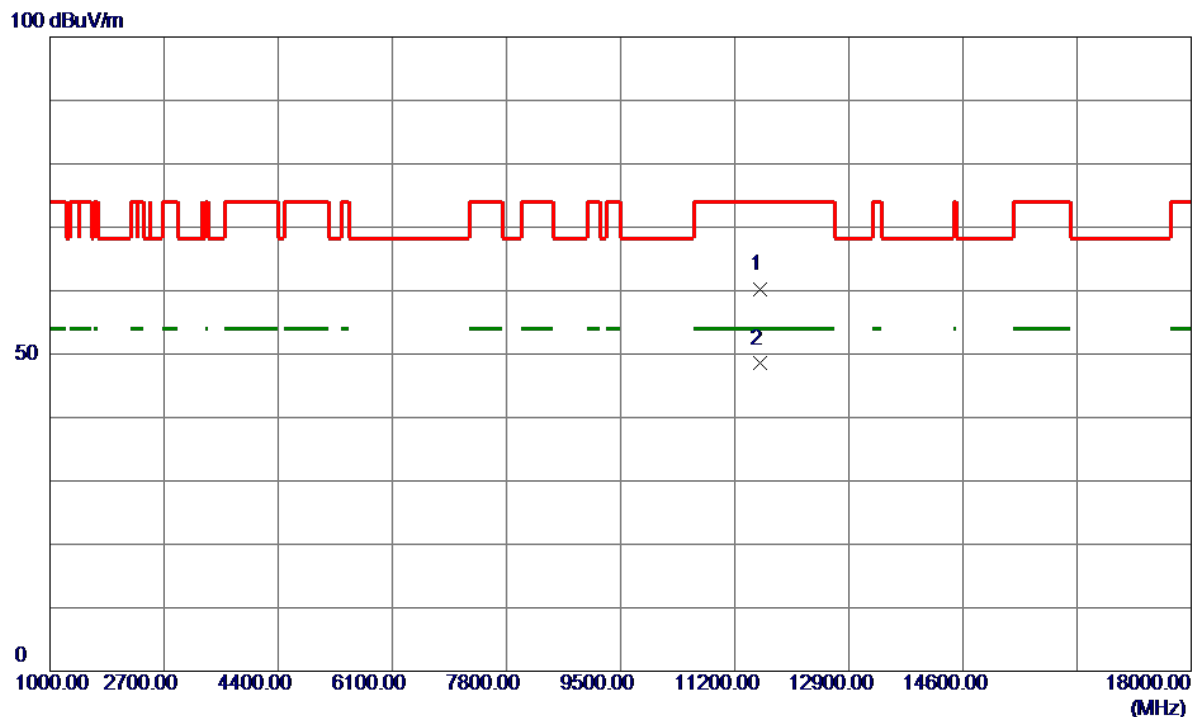


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11573.0000	50.94	9.21	60.15	74.00	-13.85	Peak	
2 *	11573.6300	39.29	9.21	48.50	54.00	-5.50	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

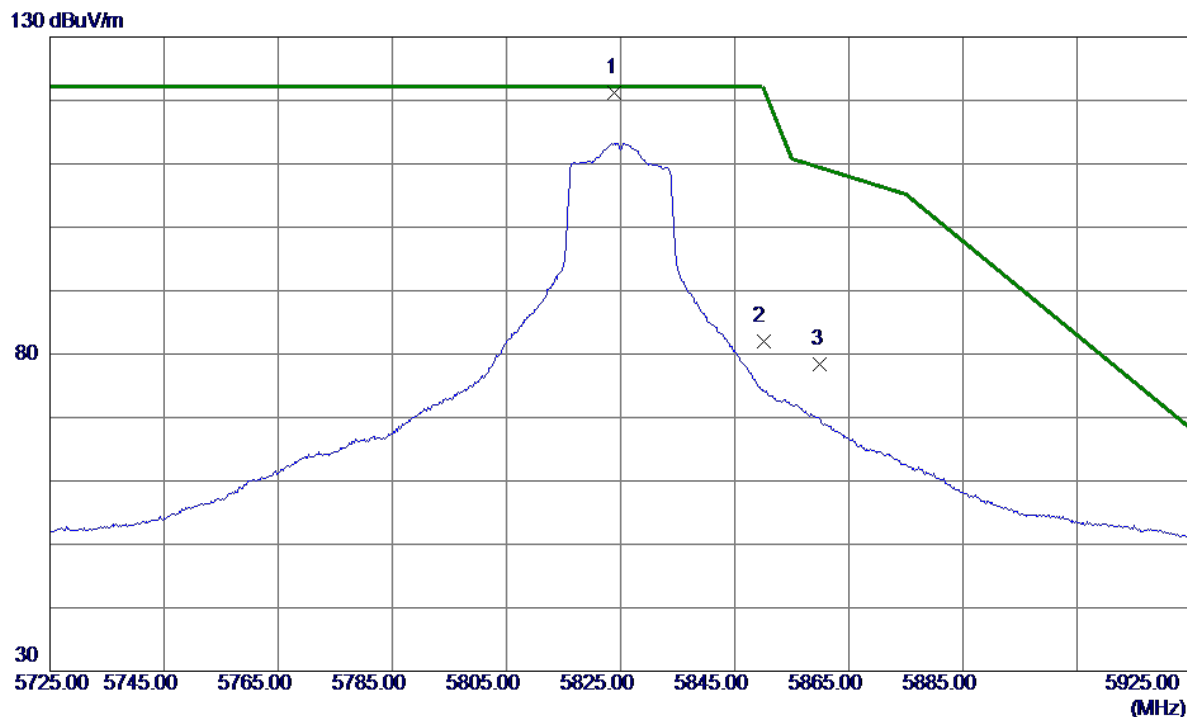


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5824.0000	104.07	17.04	121.11	122.20	-1.09	Peak	No Limit
2	5850.0000	64.95	17.13	82.08	122.20	-40.12	Peak	
3	5860.0000	61.15	17.17	78.32	109.40	-31.08	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

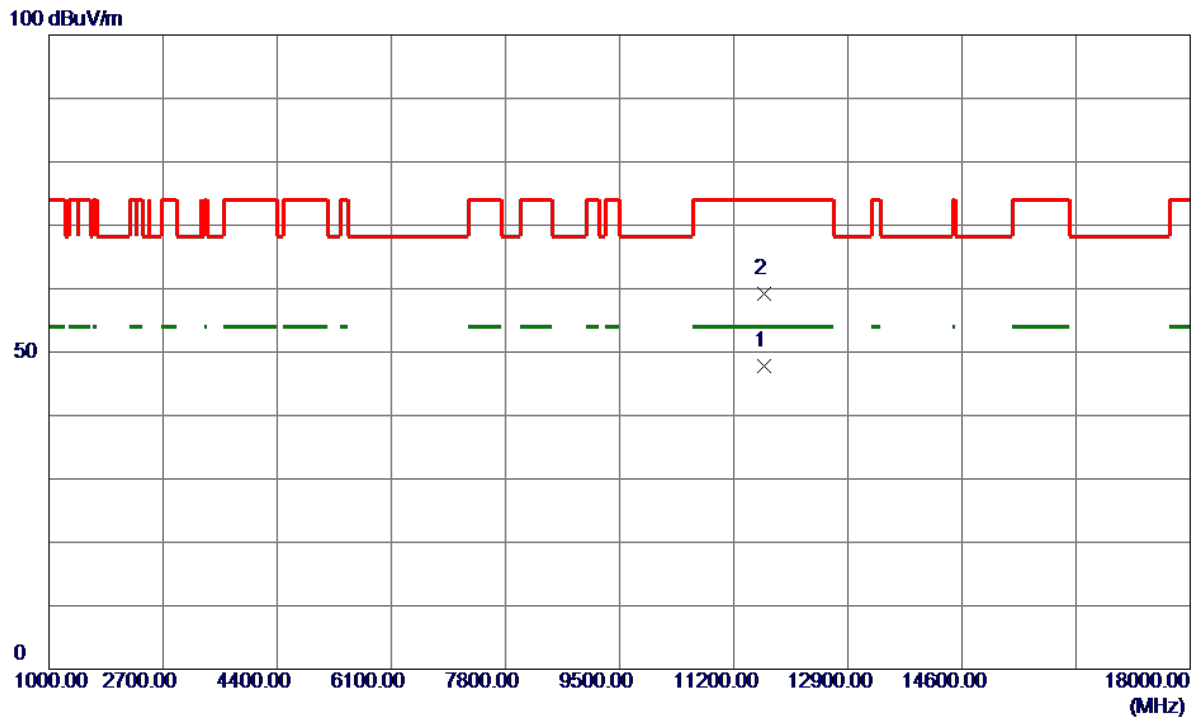


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11653.2400	38.48	9.36	47.84	54.00	-6.16	AVG	
2	11653.6900	49.75	9.37	59.12	74.00	-14.88	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

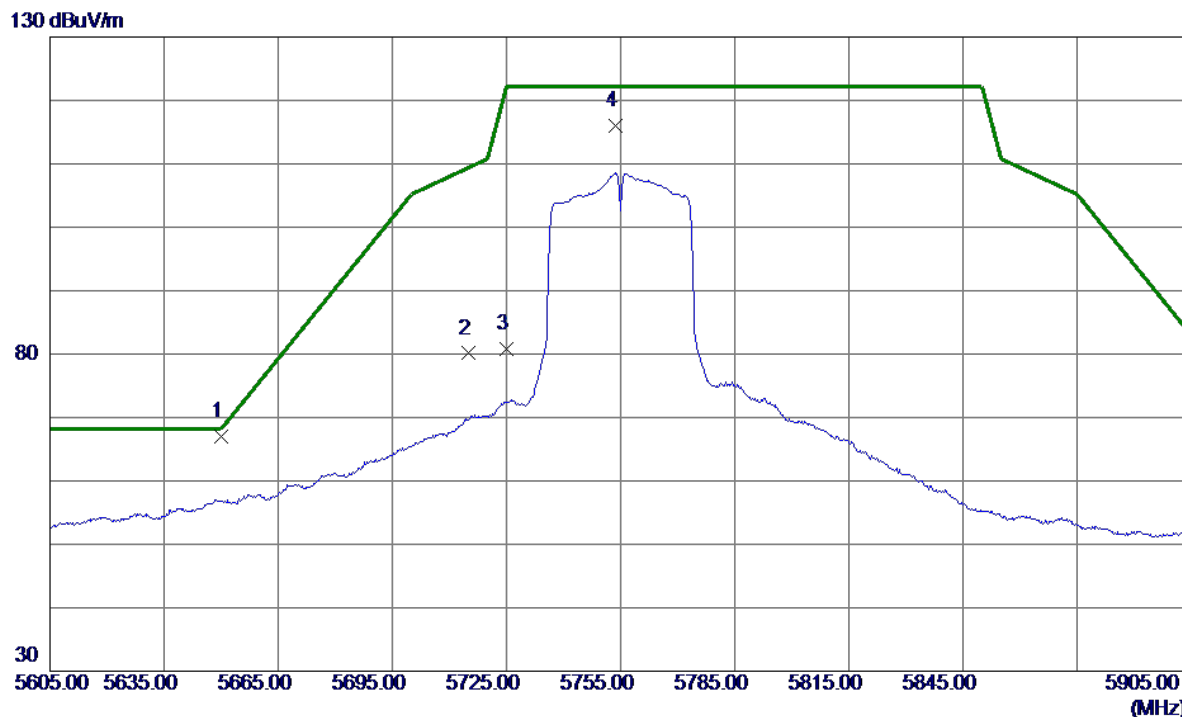


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5650.0000	50.66	16.43	67.09	68.20	-1.11	Peak	
2	5715.0000	63.44	16.66	80.10	109.40	-29.30	Peak	
3	5725.0000	64.14	16.69	80.83	122.20	-41.37	Peak	
4	5753.8000	99.27	16.80	116.07	122.20	-6.13	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

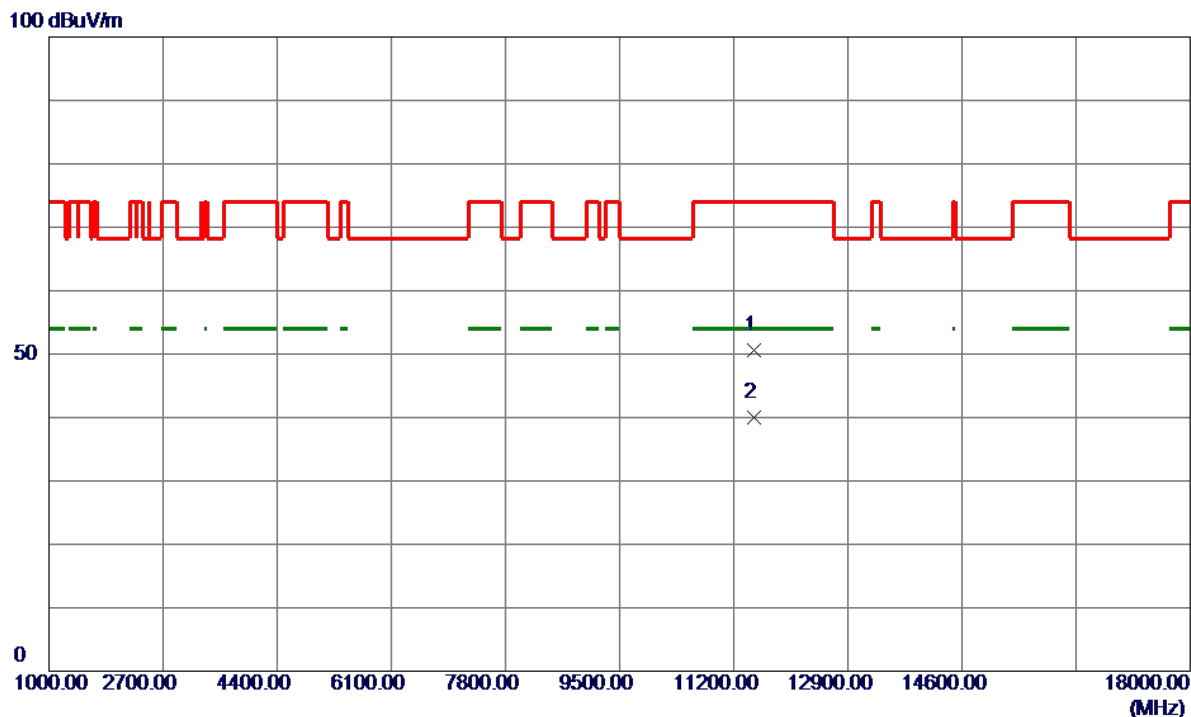


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11502.8000	41.50	9.08	50.58	74.00	-23.42	Peak	
2 *	11503.7000	30.85	9.08	39.93	54.00	-14.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

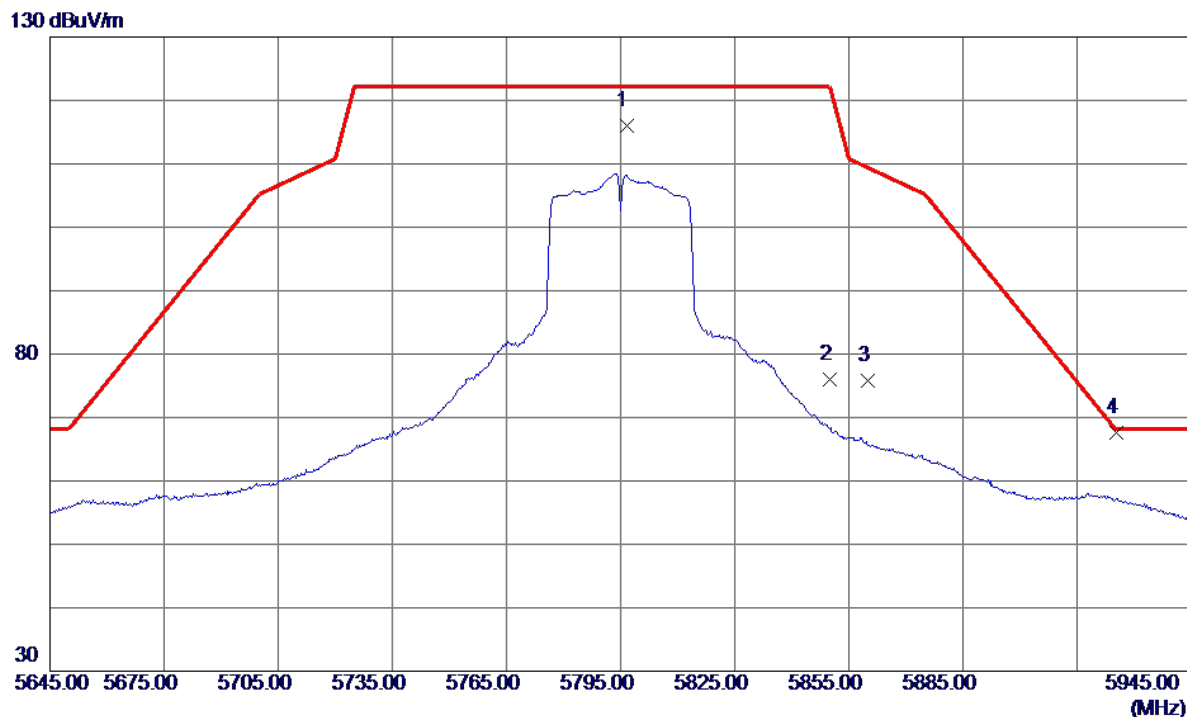


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5796.5000	99.07	16.95	116.02	122.20	-6.18	Peak	No Limit
2	5850.0000	58.92	17.13	76.05	122.20	-46.15	Peak	
3	5860.0000	58.59	17.17	75.76	109.40	-33.64	Peak	
4 *	5925.3000	50.23	17.40	67.63	68.20	-0.57	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

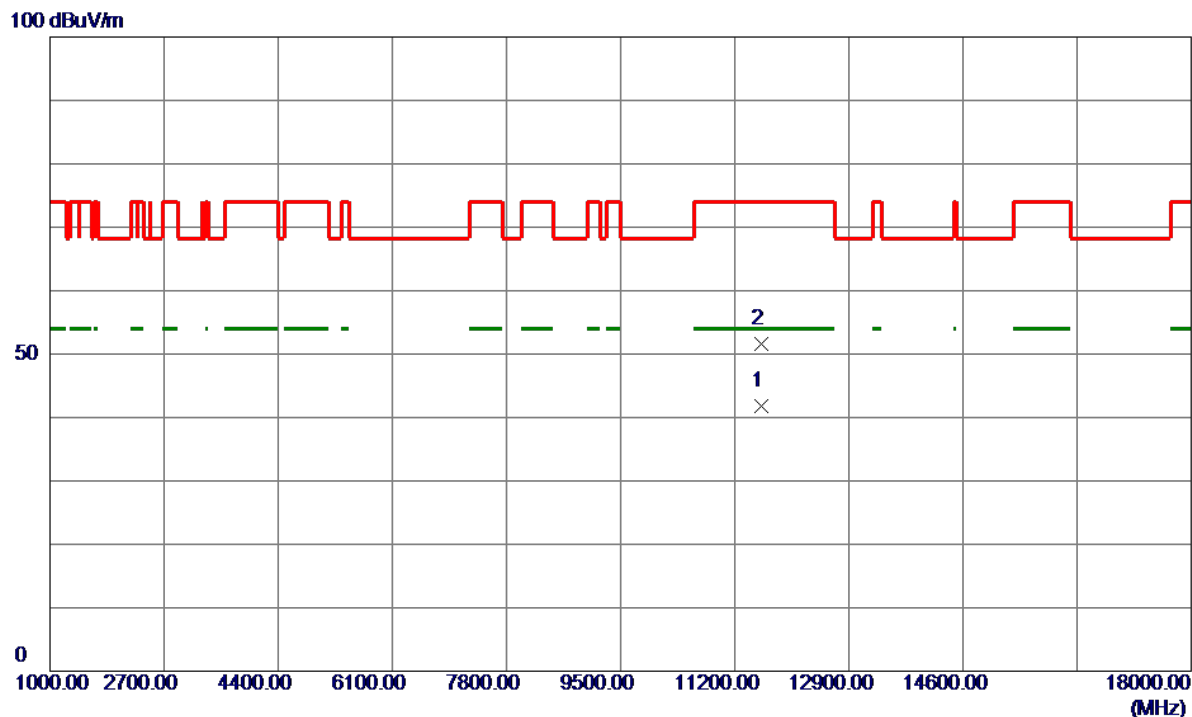


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11592.5000	32.63	9.25	41.88	54.00	-12.12	AVG	
2	11593.3000	42.27	9.25	51.52	74.00	-22.48	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

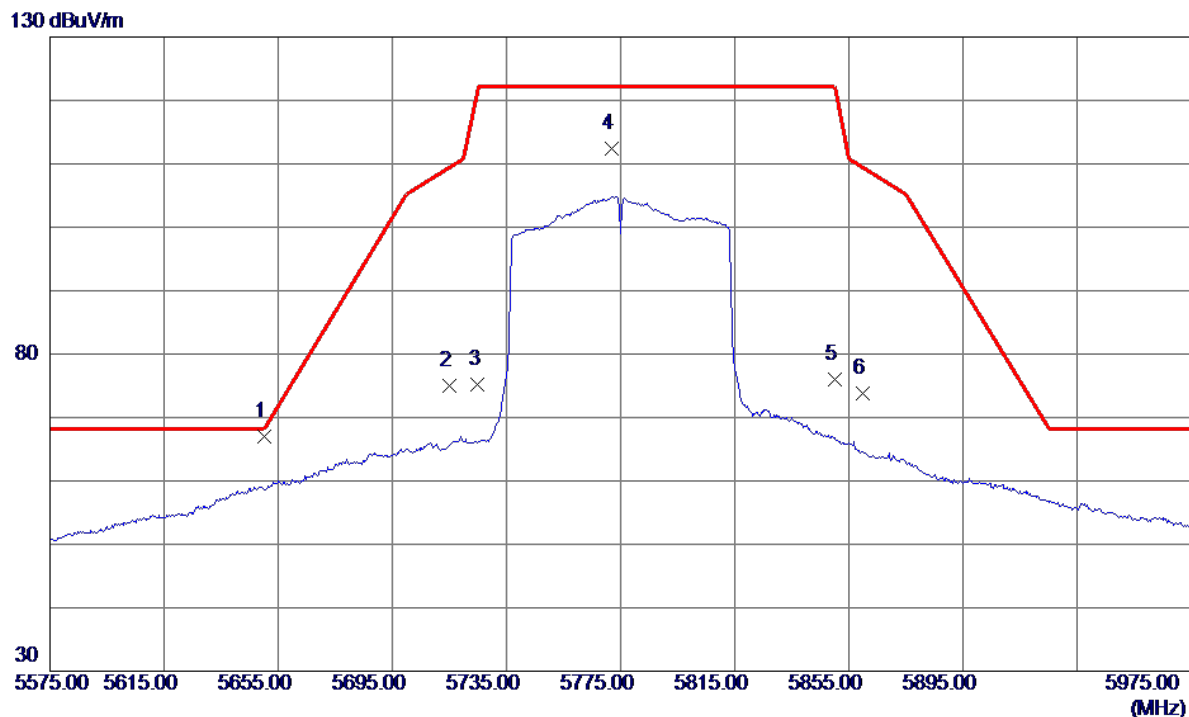


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5650.0000	50.64	16.43	67.07	68.20	-1.13	Peak	
2	5715.0000	58.26	16.66	74.92	109.40	-34.48	Peak	
3	5725.0000	58.57	16.69	75.26	122.20	-46.94	Peak	
4	5771.8000	95.53	16.86	112.39	122.20	-9.81	Peak	No Limit
5	5850.0000	58.85	17.13	75.98	122.20	-46.22	Peak	
6	5860.0000	56.56	17.17	73.73	109.40	-35.67	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

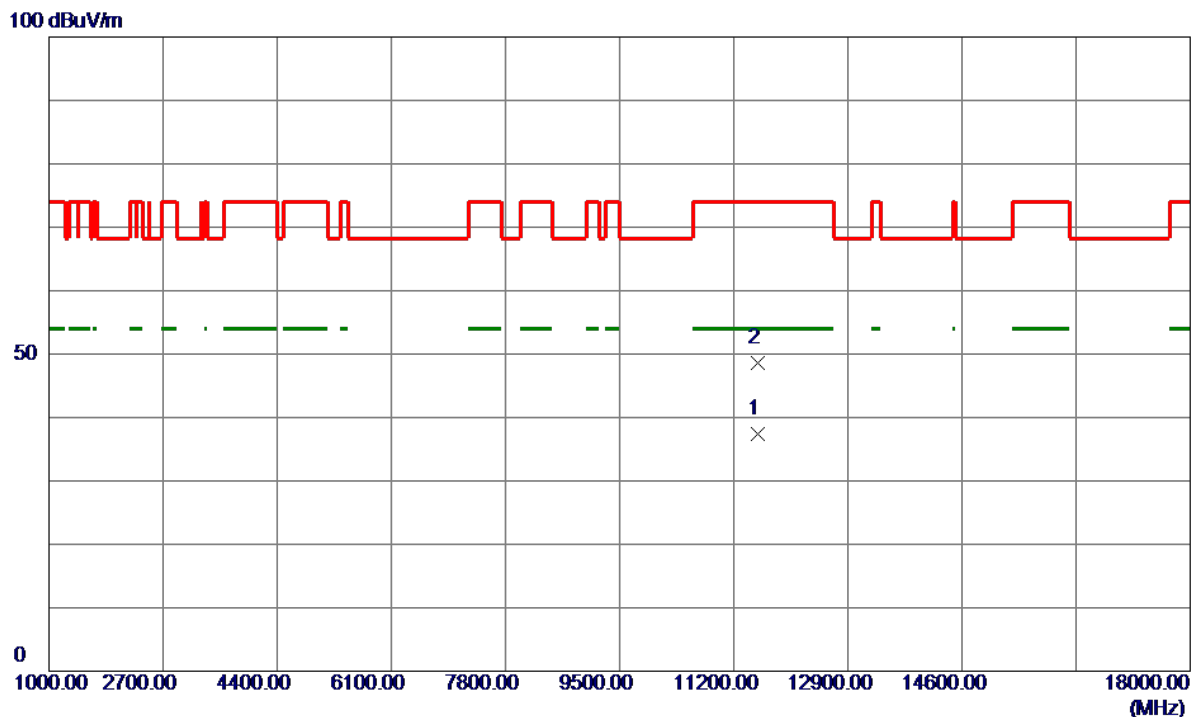


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11555.8000	28.20	9.18	37.38	54.00	-16.62	AVG	
2	11556.0000	39.42	9.18	48.60	74.00	-25.40	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

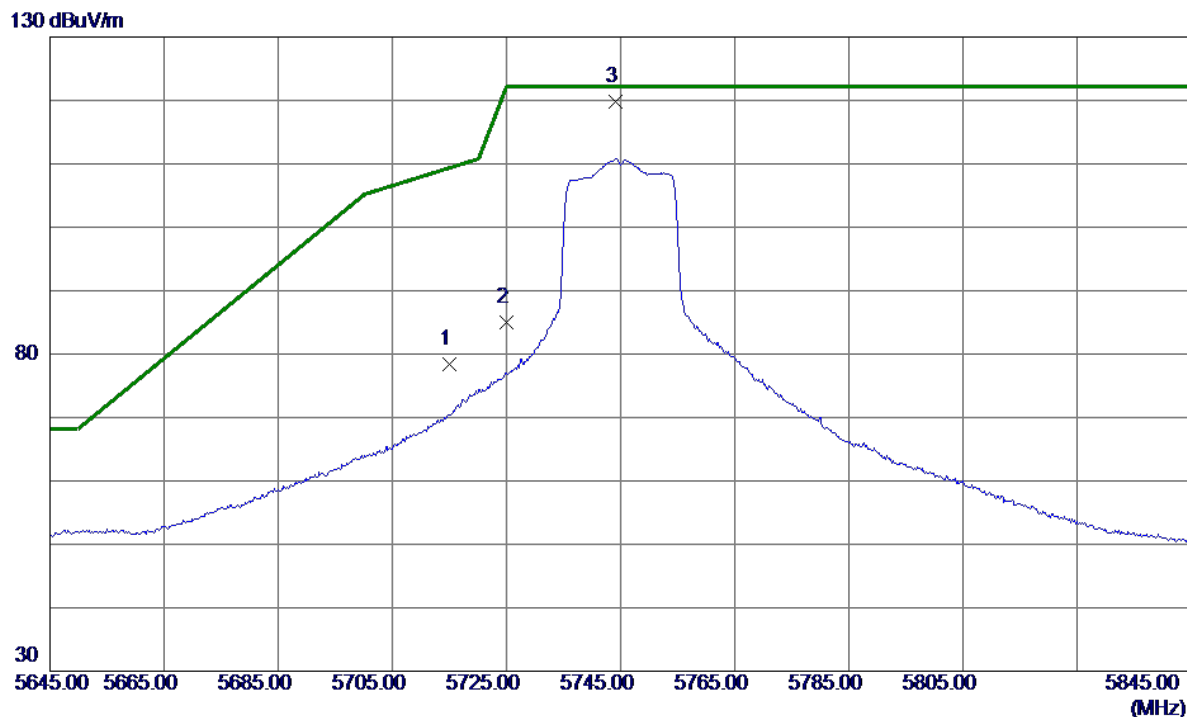


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	61.69	16.66	78.35	109.40	-31.05	Peak	
2	5725.0000	68.34	16.69	85.03	122.20	-37.17	Peak	
3 *	5744.2000	102.94	16.76	119.70	122.20	-2.50	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

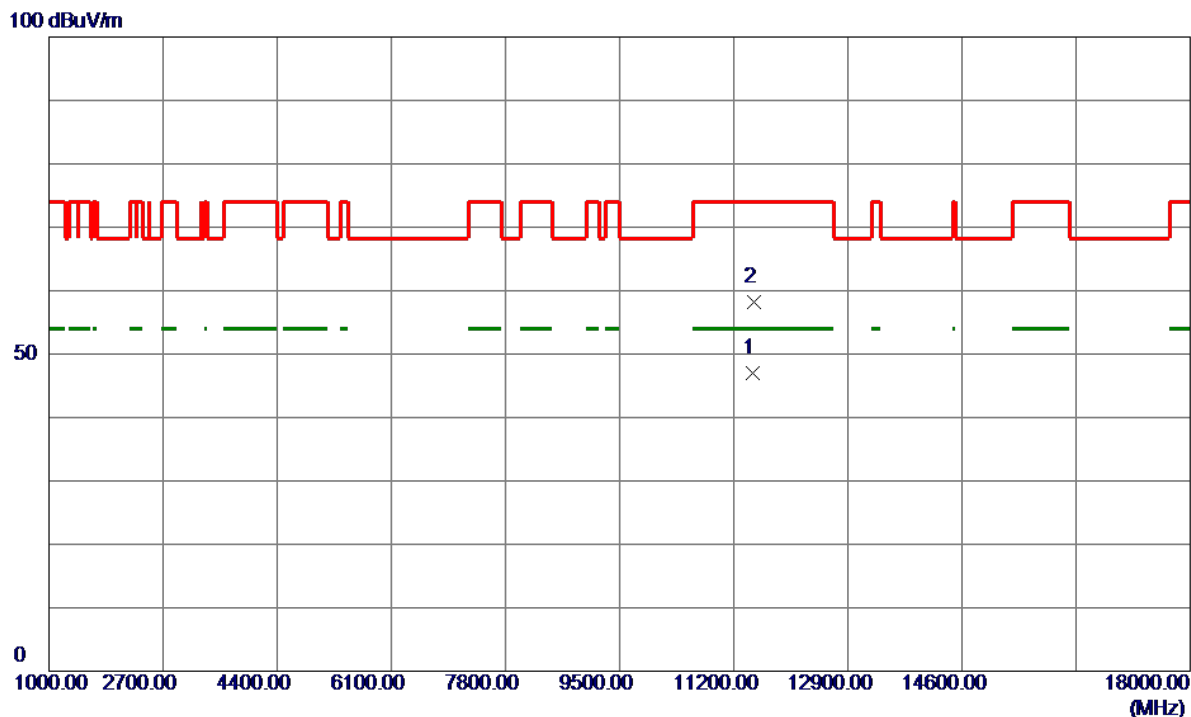


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11492.4000	37.91	9.08	46.99	54.00	-7.01	AVG	
2	11492.9100	49.13	9.08	58.21	74.00	-15.79	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

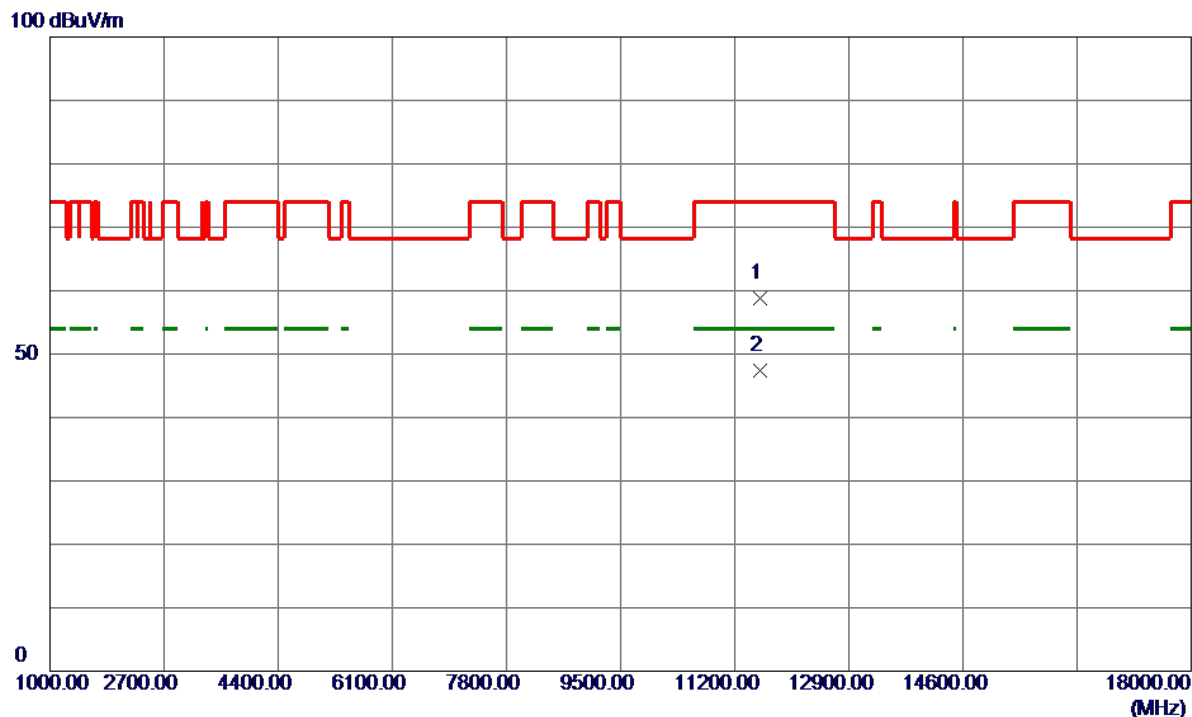


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.6300	49.53	9.21	58.74	74.00	-15.26	Peak	
2 *	11570.8700	38.23	9.21	47.44	54.00	-6.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

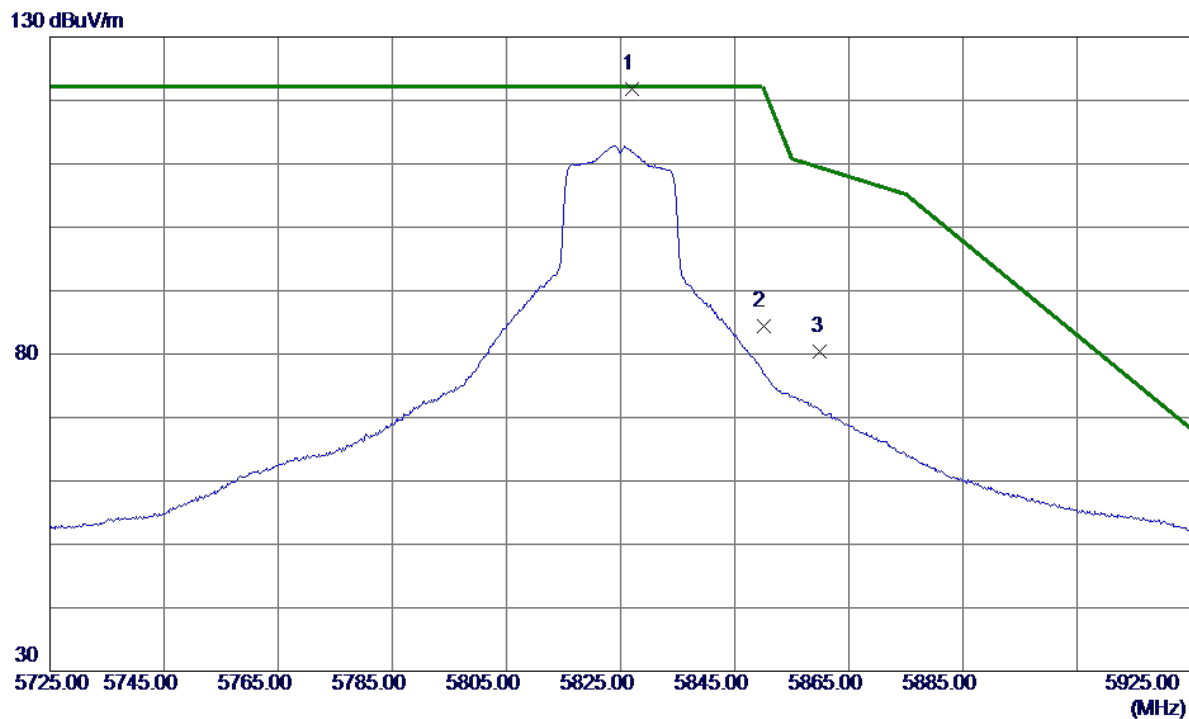


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5827.0000	104.72	17.05	121.77	122.20	-0.43	Peak	No Limit
2	5850.0000	67.31	17.13	84.44	122.20	-37.76	Peak	
3	5860.0000	63.30	17.17	80.47	109.40	-28.93	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

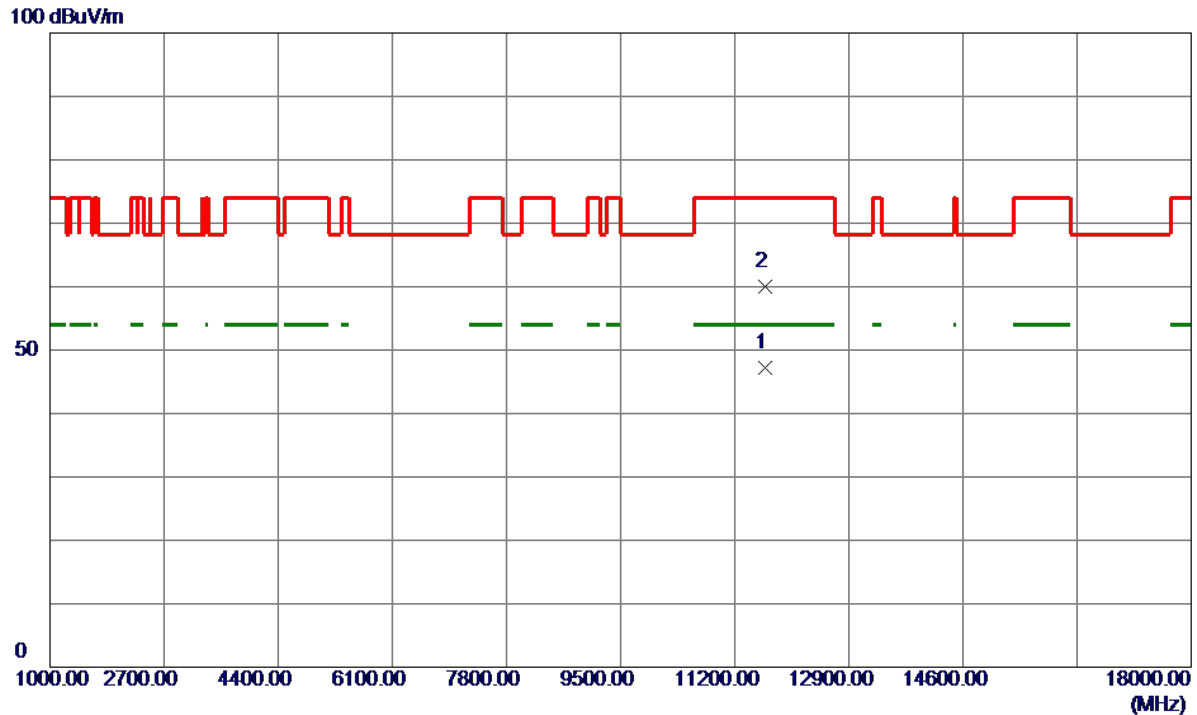


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11652.1000	37.89	9.36	47.25	54.00	-6.75	AVG	
2	11652.6100	50.59	9.36	59.95	74.00	-14.05	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

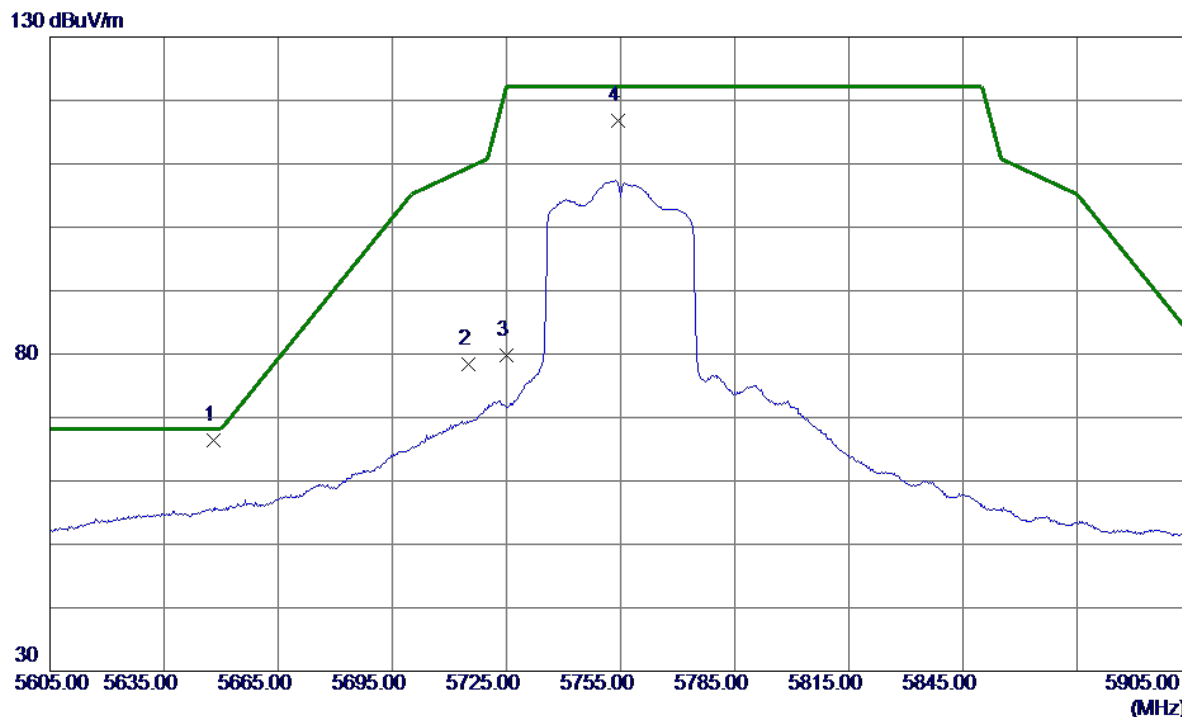


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5647.9000	50.06	16.42	66.48	68.20	-1.72	Peak	
2	5715.0000	61.65	16.66	78.31	109.40	-31.09	Peak	
3	5725.0000	63.09	16.69	79.78	122.20	-42.42	Peak	
4	5754.4000	99.96	16.80	116.76	122.20	-5.44	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

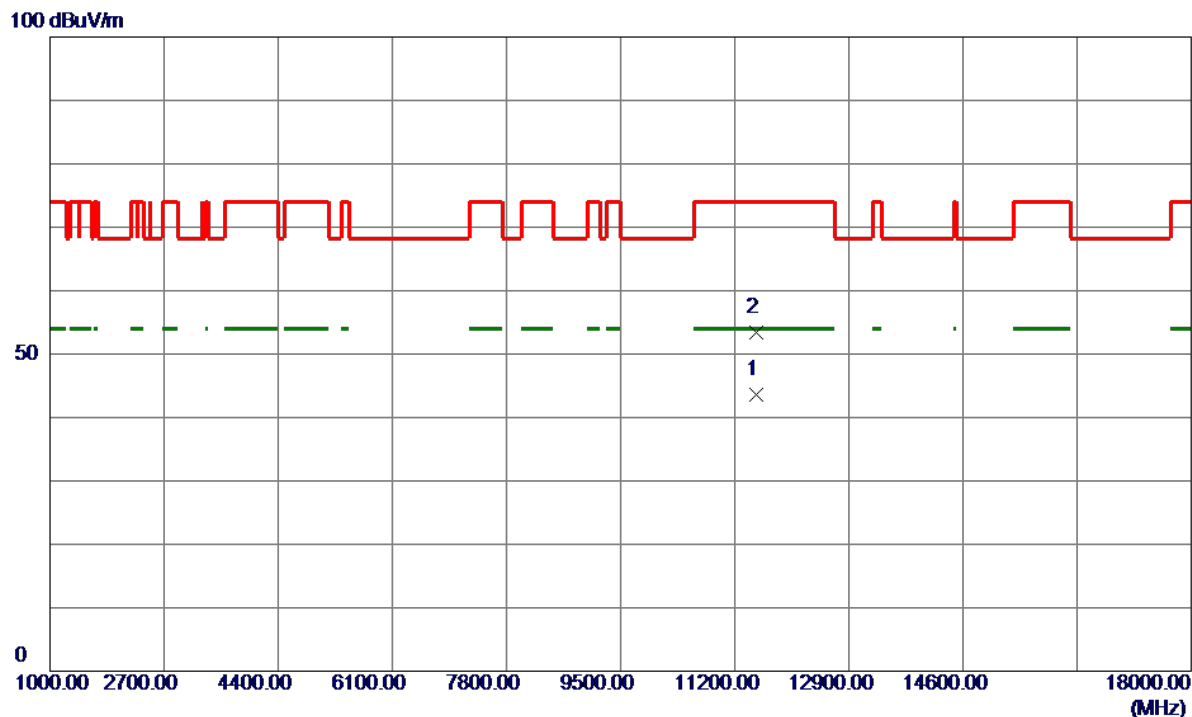


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11512.2000	34.54	9.09	43.63	54.00	-10.37	AVG	
2	11512.3600	44.36	9.09	53.45	74.00	-20.55	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

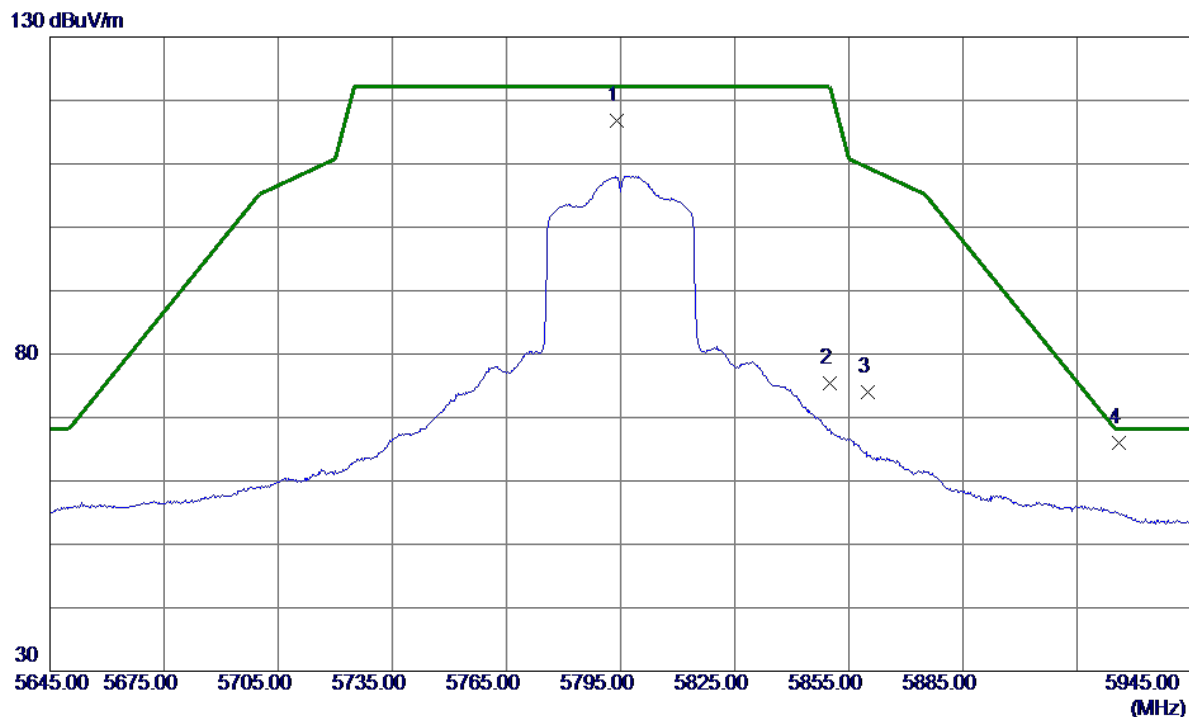


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5794.1000	99.79	16.94	116.73	122.20	-5.47	Peak	No Limit
2	5850.0000	58.25	17.13	75.38	122.20	-46.82	Peak	
3	5860.0000	56.76	17.17	73.93	109.40	-35.47	Peak	
4 *	5926.0000	48.56	17.40	65.96	68.20	-2.24	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

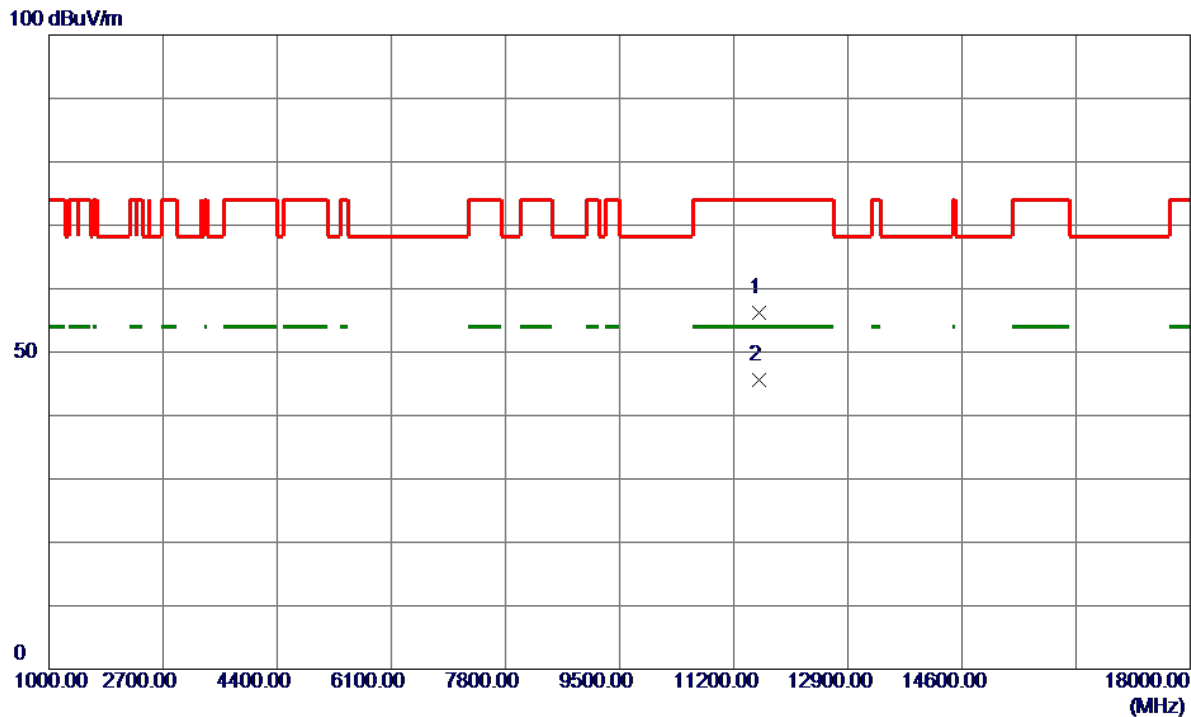


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11582.3600	47.00	9.23	56.23	74.00	-17.77	Peak	
2 *	11583.4800	36.46	9.23	45.69	54.00	-8.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

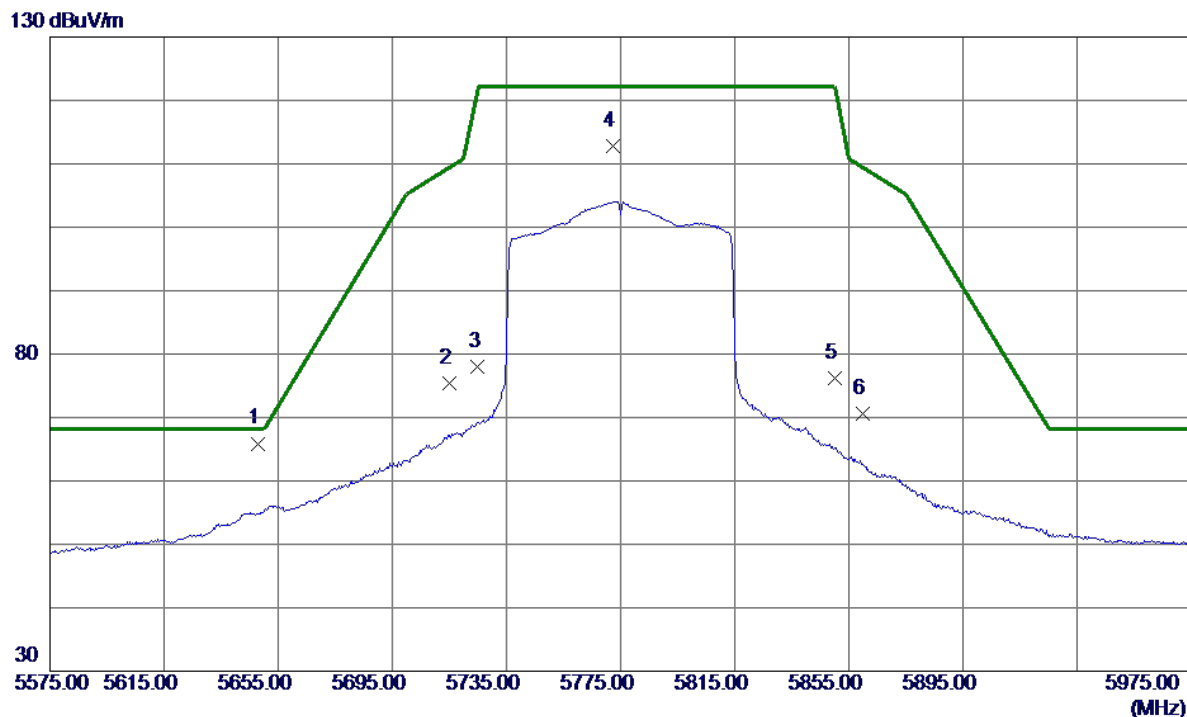

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5648.0000	49.48	16.42	65.90	68.20	-2.30	Peak	
2	5715.0000	58.82	16.66	75.48	109.40	-33.92	Peak	
3	5725.0000	61.28	16.69	77.97	122.20	-44.23	Peak	
4	5772.2000	95.98	16.86	112.84	122.20	-9.36	Peak	No Limit
5	5850.0000	59.02	17.13	76.15	122.20	-46.05	Peak	
6	5860.0000	53.44	17.17	70.61	109.40	-38.79	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

100 dBuV/m

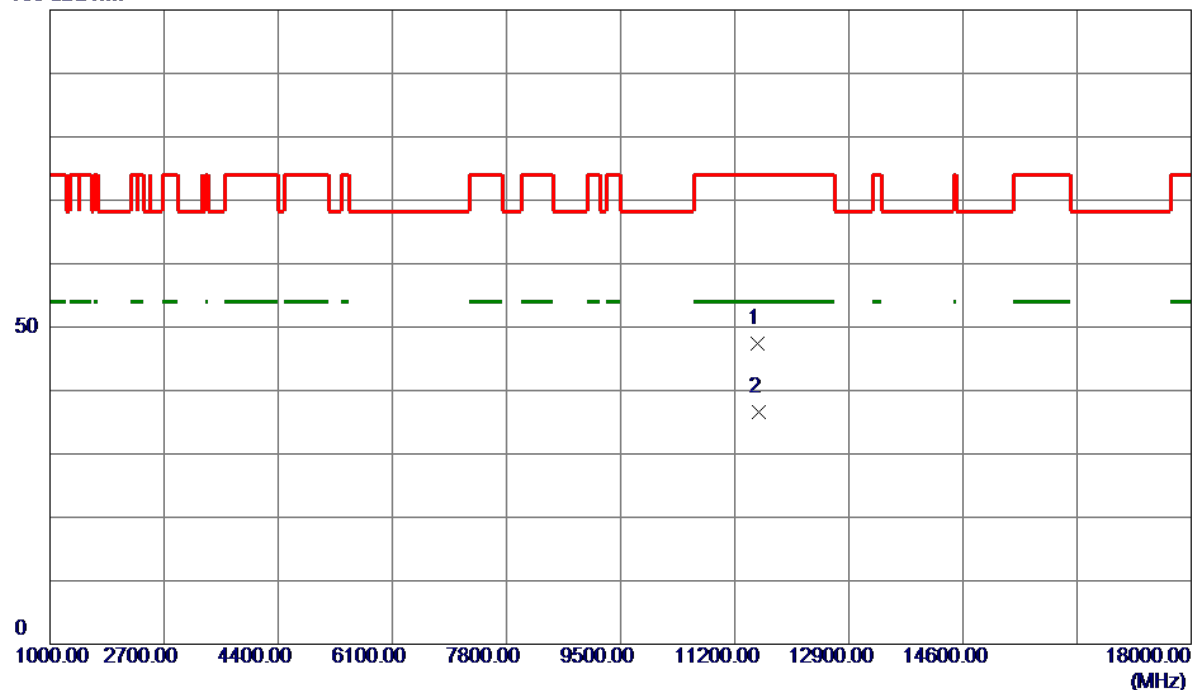

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11547.5599	38.32	9.16	47.48	74.00	-26.52	Peak	
2 *	11554.8000	27.41	9.18	36.59	54.00	-17.41	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Worst Case:

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

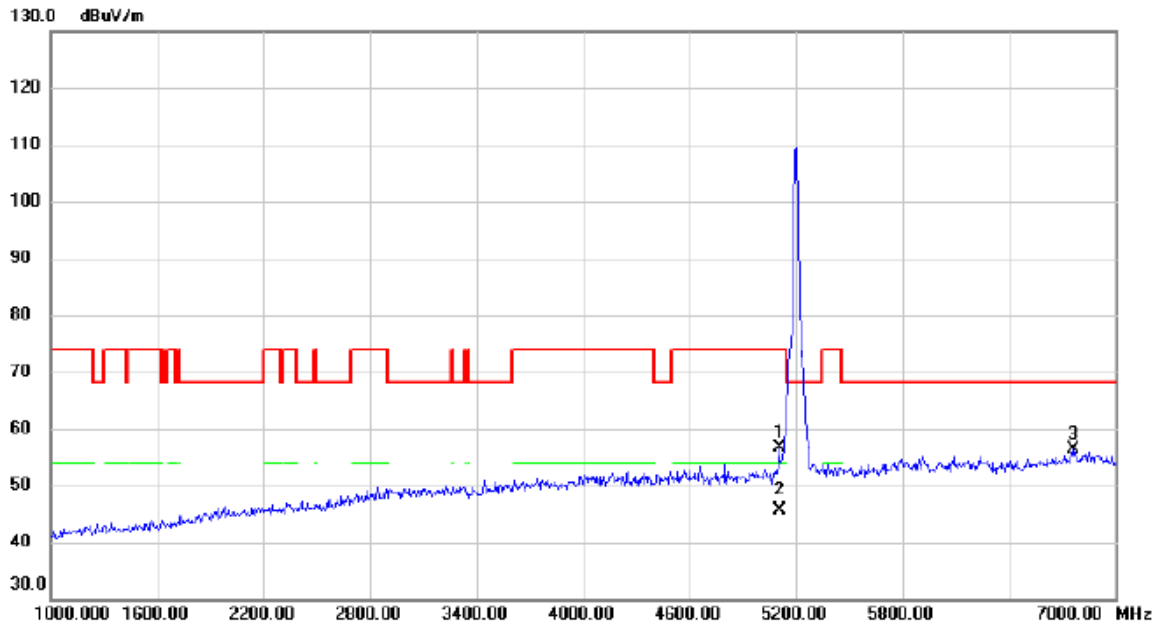


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5104.000	41.78	14.86	56.64	74.00	-17.36	peak	
2	*	5104.000	30.78	14.86	45.64	54.00	-8.36	AVG	
3		6760.000	37.33	19.04	56.37	68.20	-11.83	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

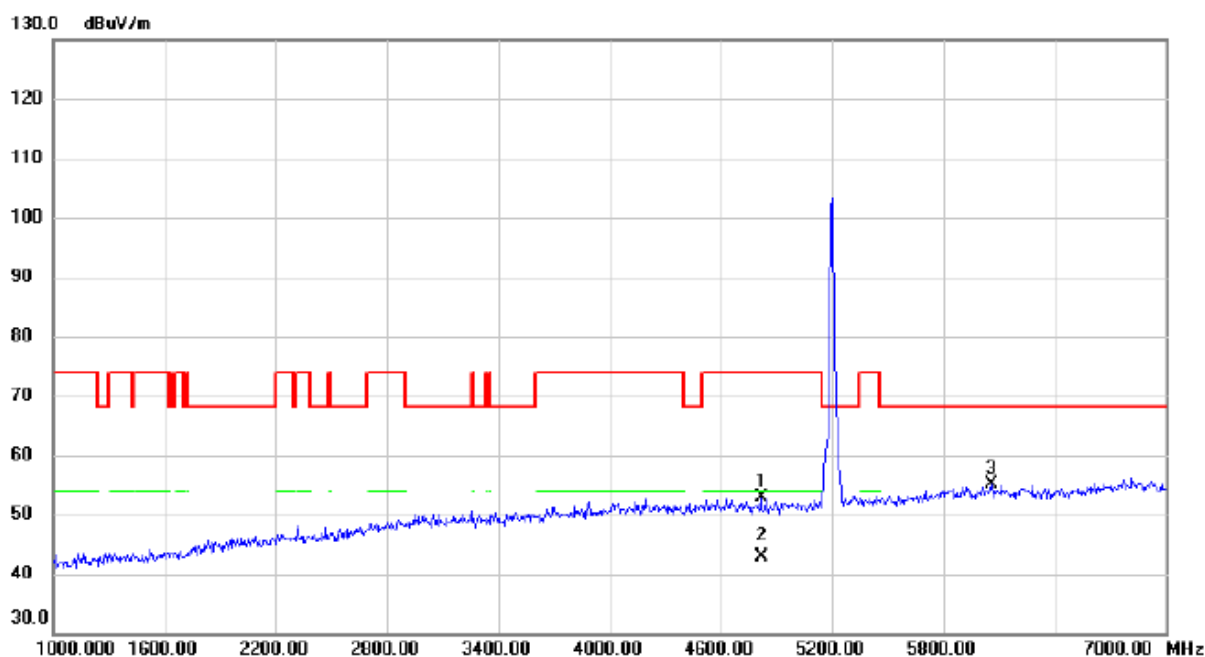


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4816.000	38.29	14.47	52.76	74.00	-21.24	peak	
2	*	4816.000	28.29	14.47	42.76	54.00	-11.24	AVG	
3		6058.000	37.35	17.73	55.08	68.20	-13.12	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

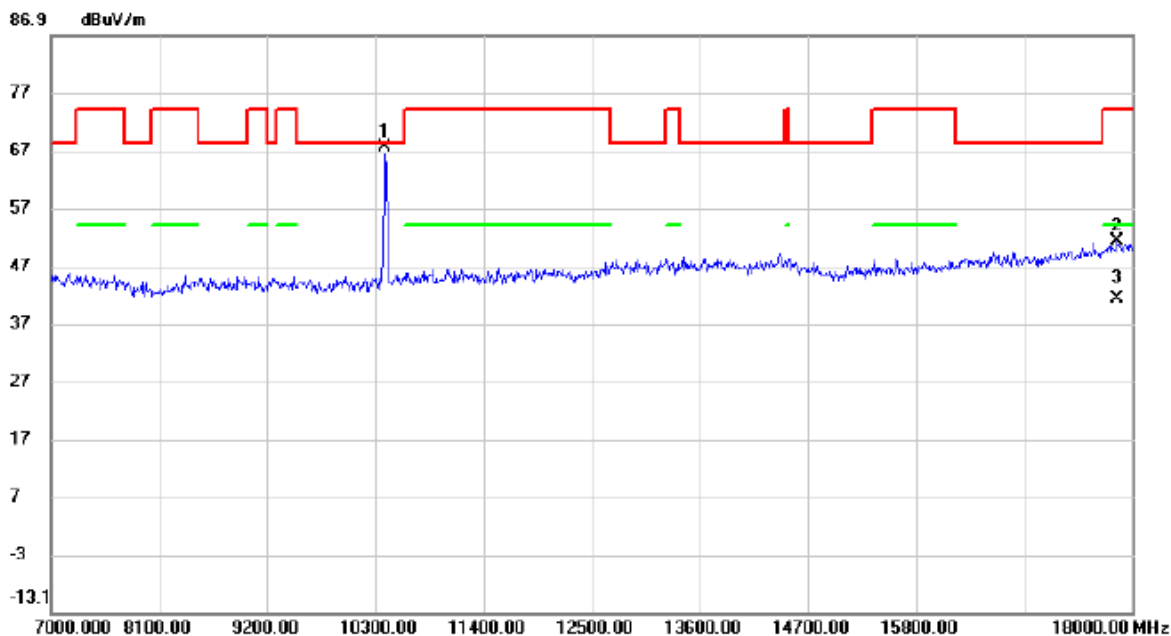


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10399.000	58.64	8.88	67.52	68.20	-0.68	peak	
2		17846.000	39.81	11.40	51.21	74.00	-22.79	peak	
3		17846.000	29.88	11.40	41.28	54.00	-12.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

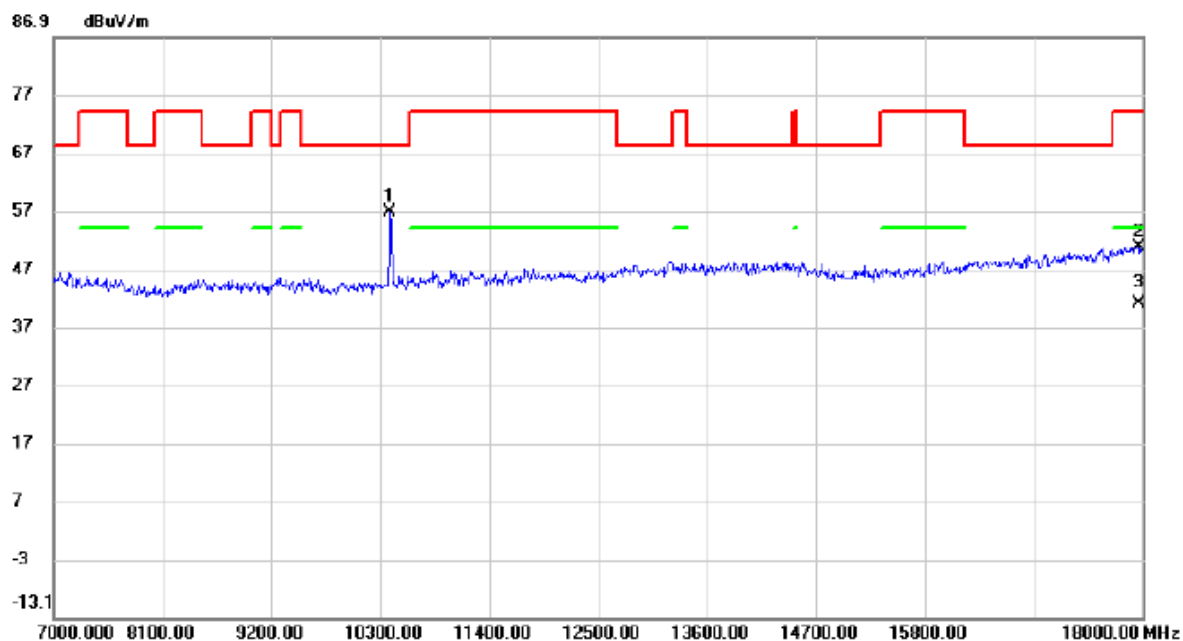


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10399.000	48.01	8.88	56.89	68.20	-11.31	peak	
2		17956.000	39.30	11.60	50.90	74.00	-23.10	peak	
3		17956.000	29.47	11.60	41.07	54.00	-12.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Straddle Channel:

Test Mode	UNII-2C_TX A Mode 5720 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

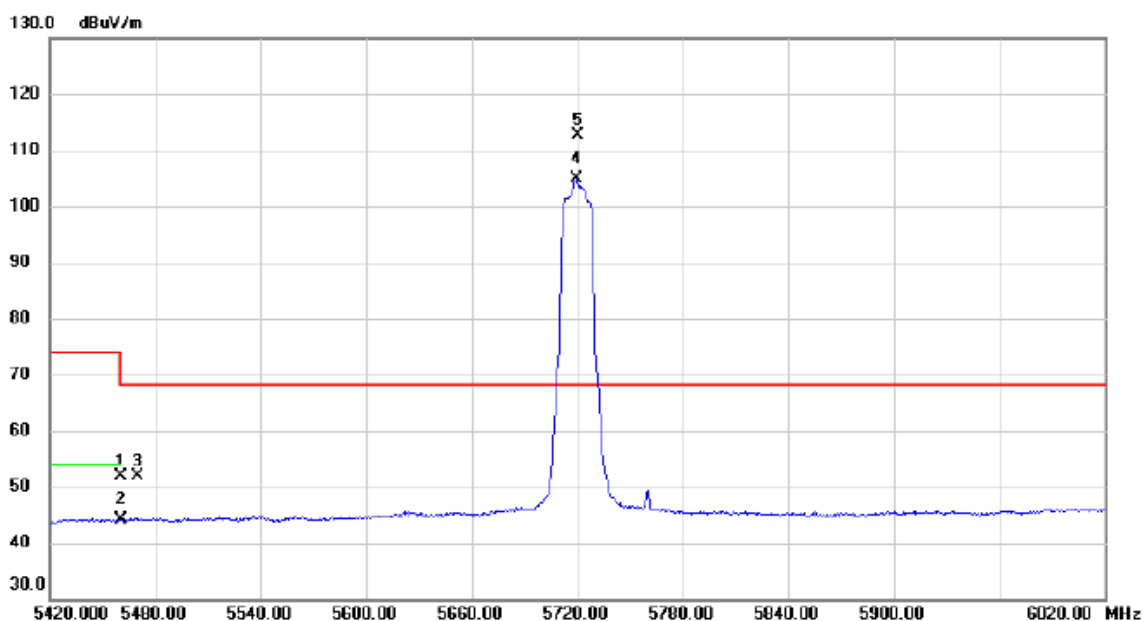


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	36.02	15.79	51.81	74.00	-22.19	peak	
2		5460.000	28.43	15.79	44.22	54.00	-9.78	AVG	
3		5470.000	36.13	15.83	51.96	68.20	-16.24	peak	
4	X	5719.400	88.09	16.68	104.77	68.20	36.57	AVG	No Limit
5	*	5720.600	95.90	16.68	112.58	68.20	44.38	peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5720 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

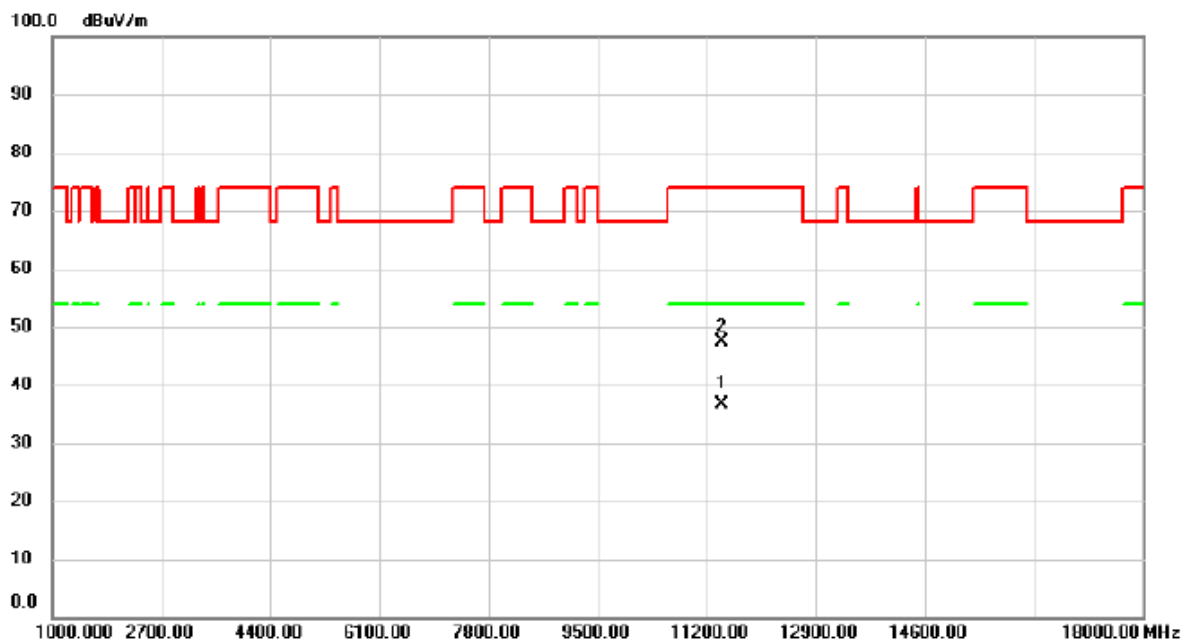


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11441.880	27.51	9.15	36.66	54.00	-17.34	AVG	
2		11442.760	38.35	9.15	47.50	74.00	-26.50	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5720 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

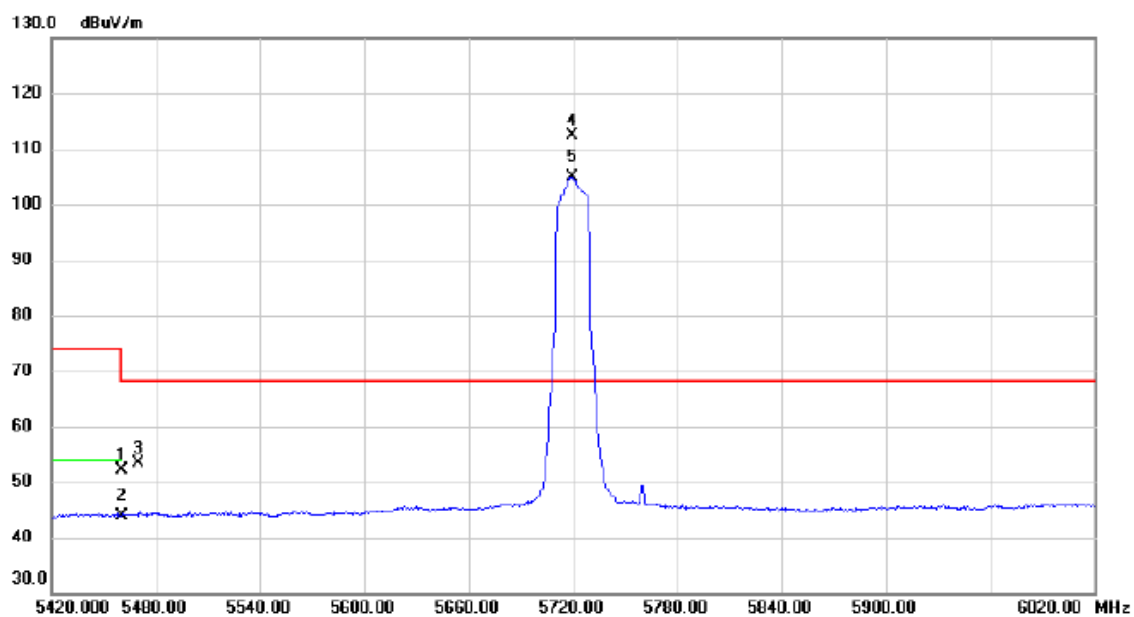


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5460.000	36.38	15.79	52.17	74.00	-21.83	peak	
2		5460.000	28.17	15.79	43.96	54.00	-10.04	AVG	
3		5470.000	37.54	15.83	53.37	68.20	-14.83	peak	
4 *		5719.400	95.72	16.68	112.40	68.20	44.20	peak	No Limit
5 X		5719.400	88.29	16.68	104.97	68.20	36.77	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5720 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

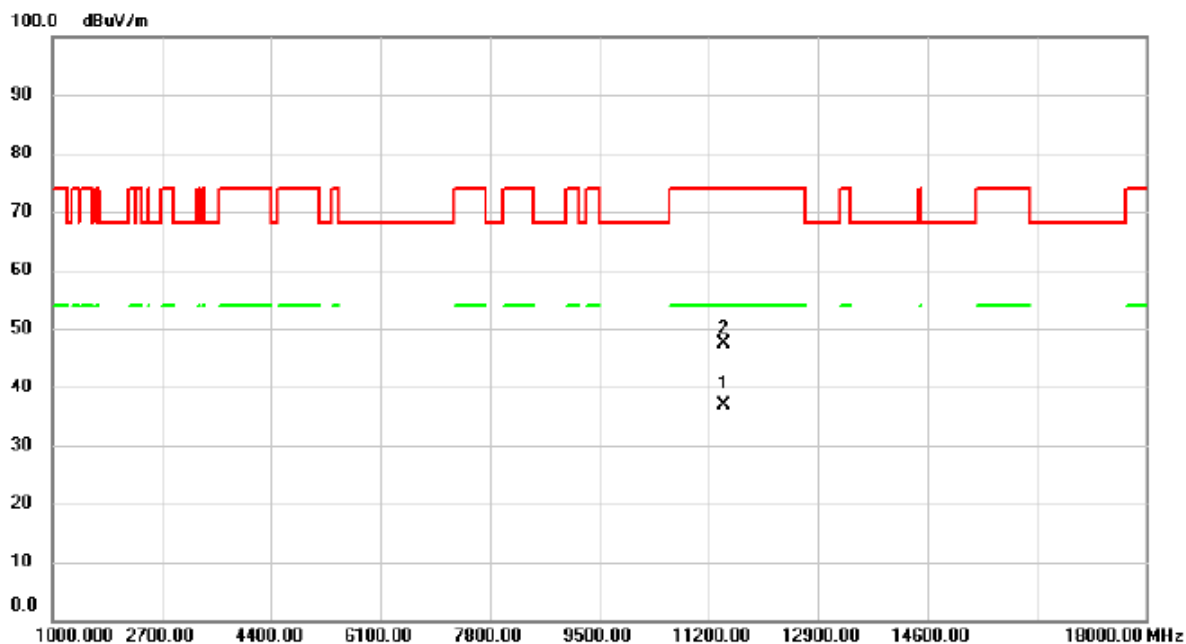


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11440.420	27.79	9.15	36.94	54.00	-17.06	AVG	
2		11440.540	38.29	9.15	47.44	74.00	-26.56	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5710 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

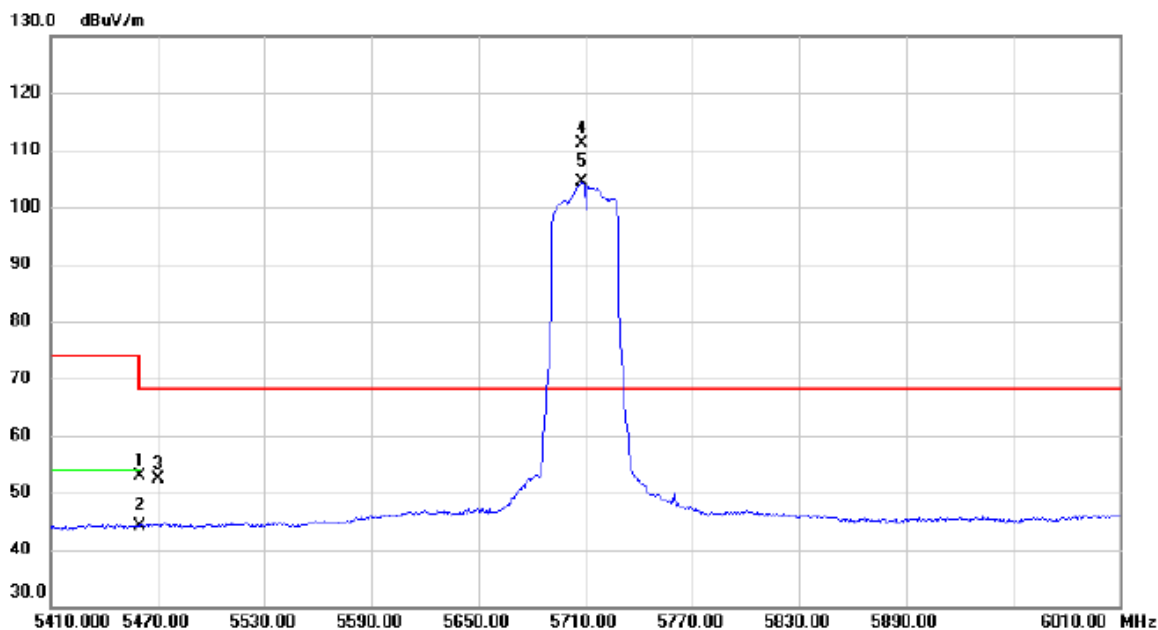


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	37.05	15.79	52.84	74.00	-21.16	peak	
2		5460.000	28.38	15.79	44.17	54.00	-9.83	AVG	
3		5470.000	36.52	15.83	52.35	68.20	-15.85	peak	
4	*	5708.200	94.62	16.63	111.25	68.20	43.05	peak	No Limit
5	X	5708.200	87.72	16.63	104.35	68.20	36.15	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5710 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

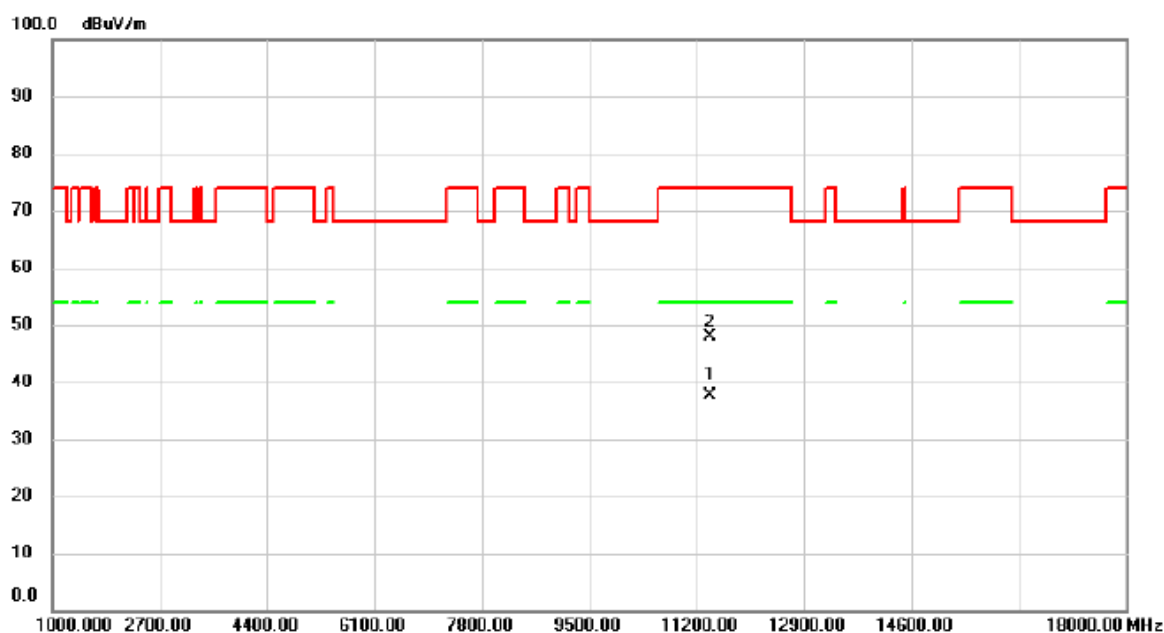


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11411.200	28.44	9.19	37.63	54.00	-16.37	AVG	
2		11412.400	38.80	9.19	47.99	74.00	-26.01	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5690 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

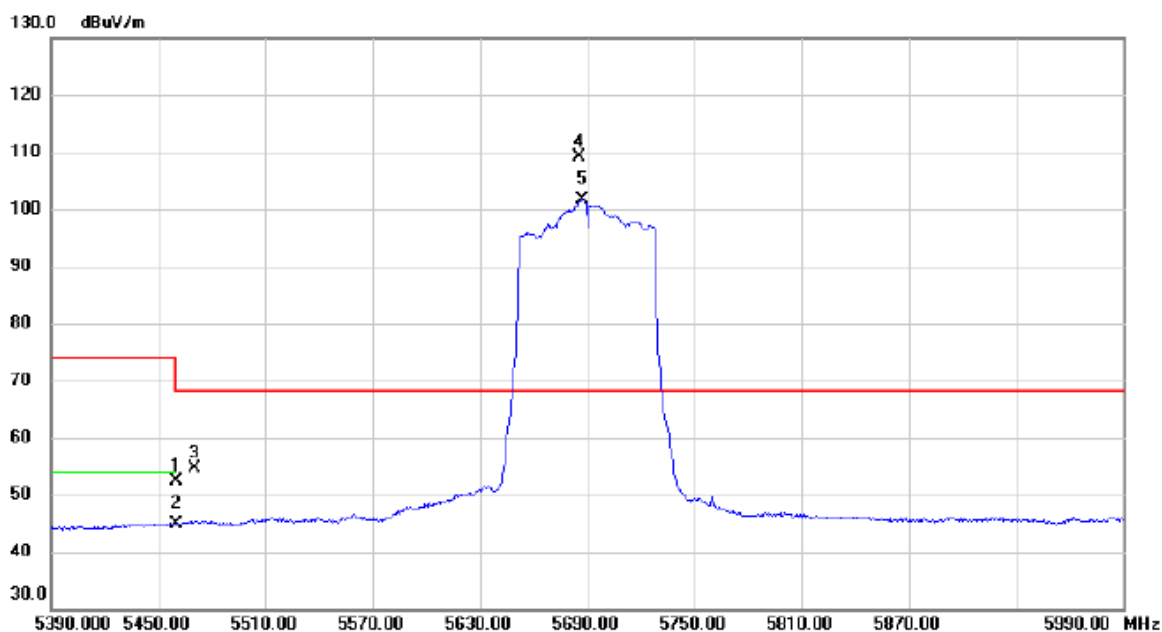


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	36.70	15.79	52.49	74.00	-21.51	peak	
2		5460.000	29.05	15.79	44.84	54.00	-9.16	AVG	
3		5470.000	38.72	15.83	54.55	68.20	-13.65	peak	
4	*	5685.800	92.52	16.55	109.07	68.20	40.87	peak	No Limit
5	X	5687.000	85.12	16.56	101.68	68.20	33.48	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5690 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

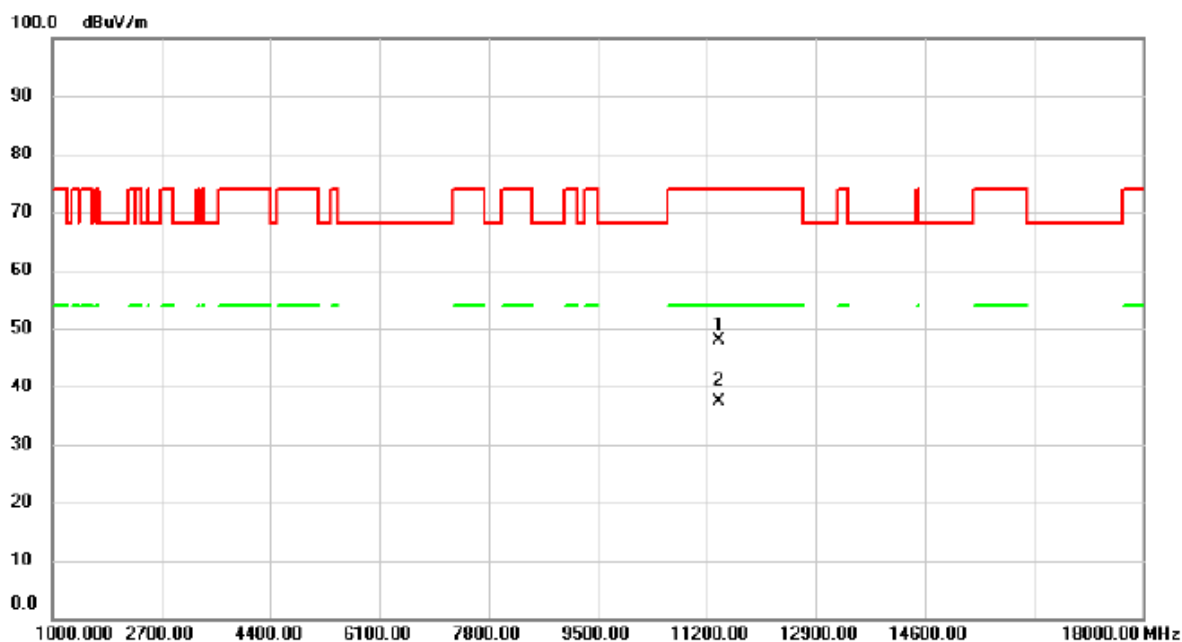


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11389.680	38.68	9.22	47.90	74.00	-26.10	peak	
2	*	11391.000	28.07	9.22	37.29	54.00	-16.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5720 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

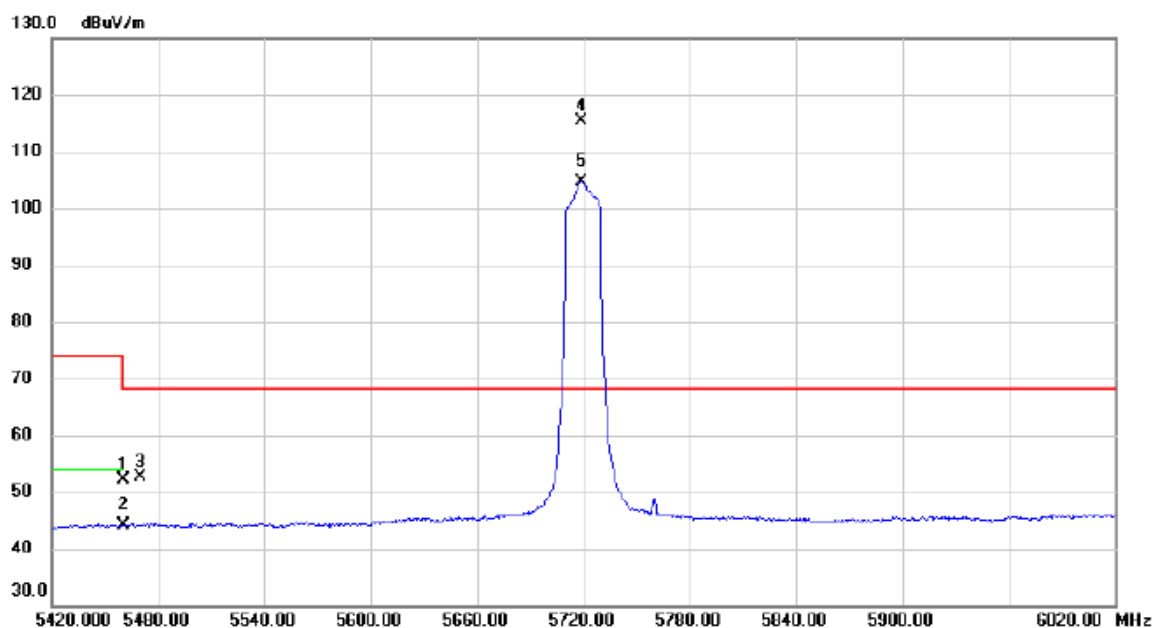


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	36.25	15.79	52.04	74.00	-21.96	peak	
2		5460.000	28.42	15.79	44.21	54.00	-9.79	AVG	
3		5470.000	36.83	15.83	52.66	68.20	-15.54	peak	
4	*	5718.800	98.72	16.67	115.39	68.20	47.19	peak	No Limit
5	X	5718.800	88.08	16.67	104.75	68.20	36.55	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5720 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

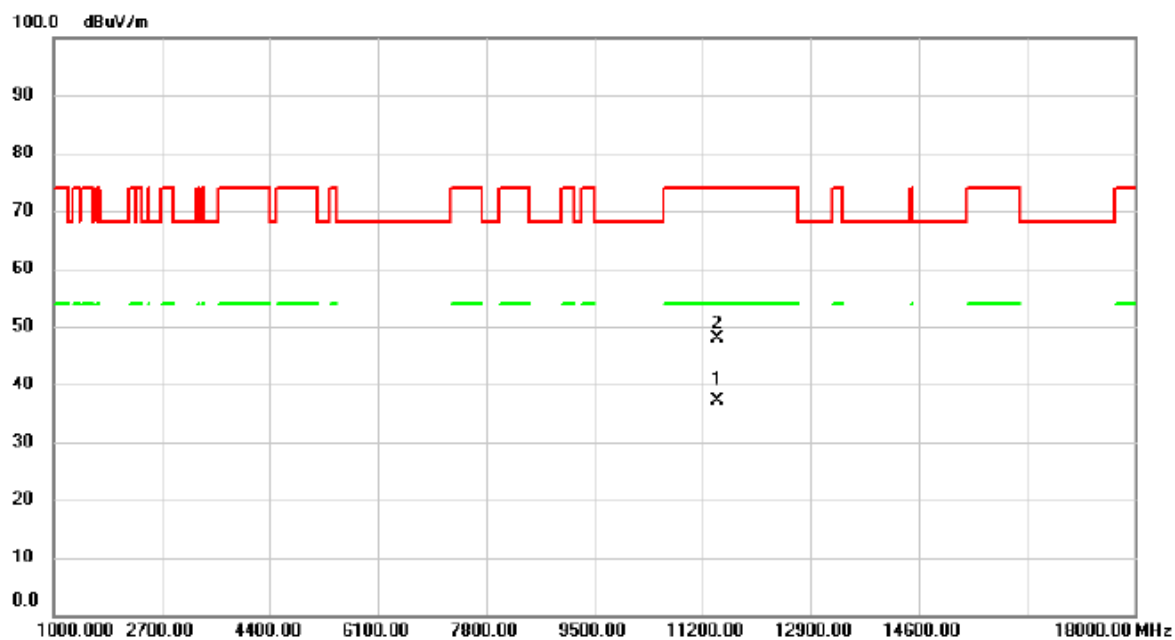


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11440.400	28.04	9.15	37.19	54.00	-16.81	AVG	
2		11440.440	38.67	9.15	47.82	74.00	-26.18	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5710 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

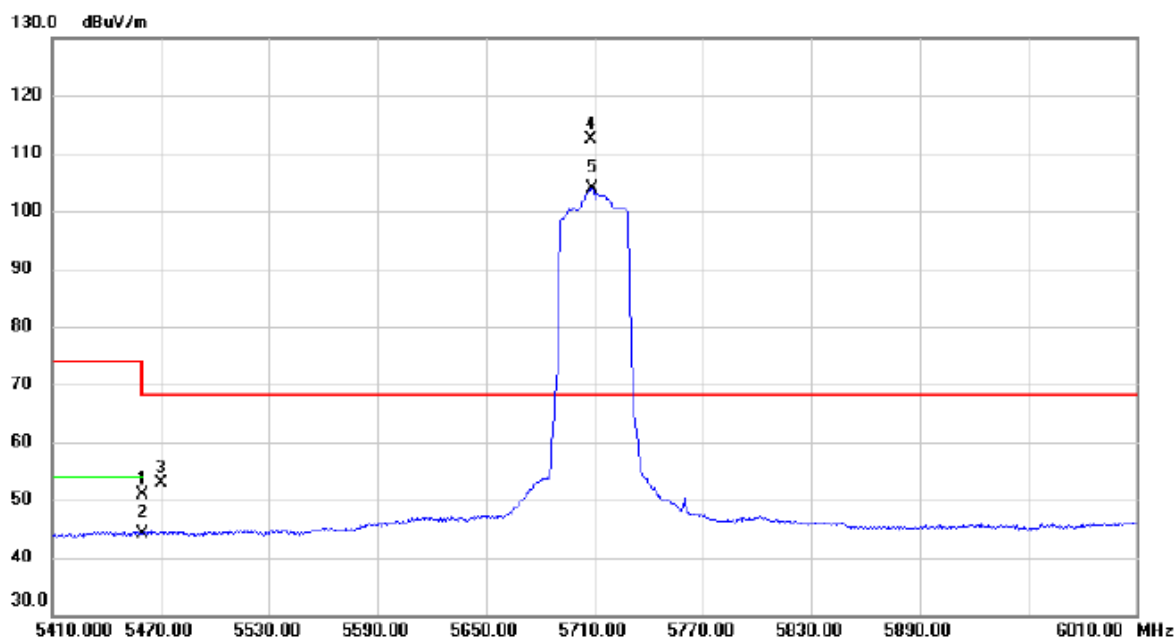

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	35.00	15.79	50.79	74.00	-23.21	peak	
2		5460.000	28.36	15.79	44.15	54.00	-9.85	AVG	
3		5470.000	37.04	15.83	52.87	68.20	-15.33	peak	
4	*	5707.600	95.72	16.63	112.35	68.20	44.15	peak	No Limit
5	X	5708.800	87.21	16.63	103.84	68.20	35.64	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.