


Test Mode	UNII-2C_TX AX(HE40) Mode 5710 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

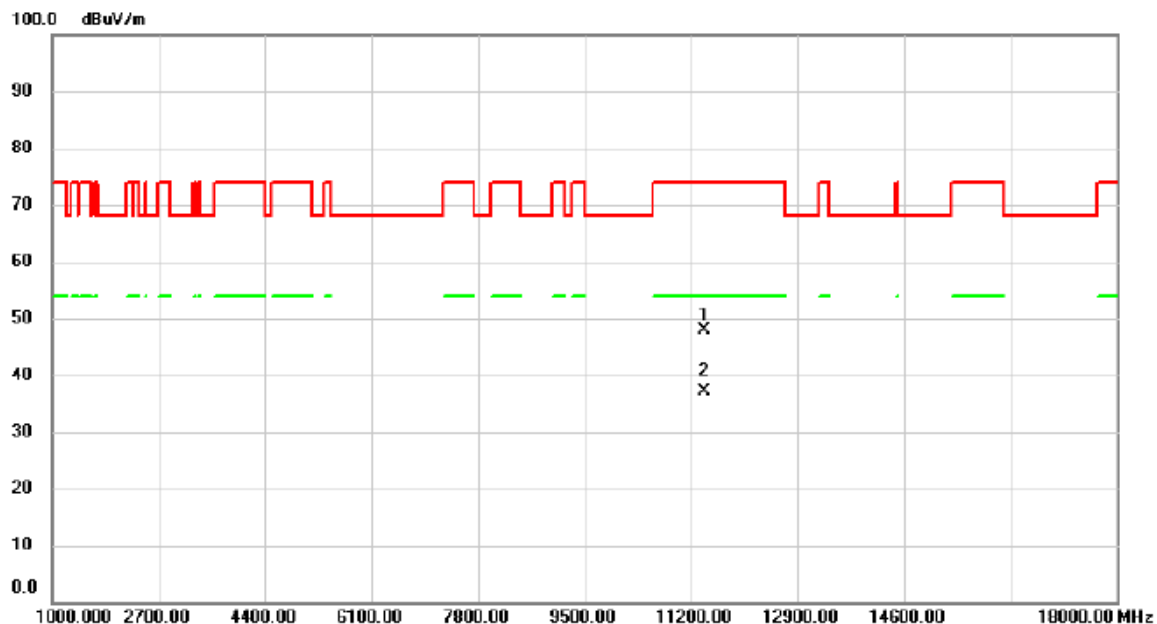


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11411.360	38.70	9.19	47.89	74.00	-26.11	peak	
2	*	11421.120	28.02	9.18	37.20	54.00	-16.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5690 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

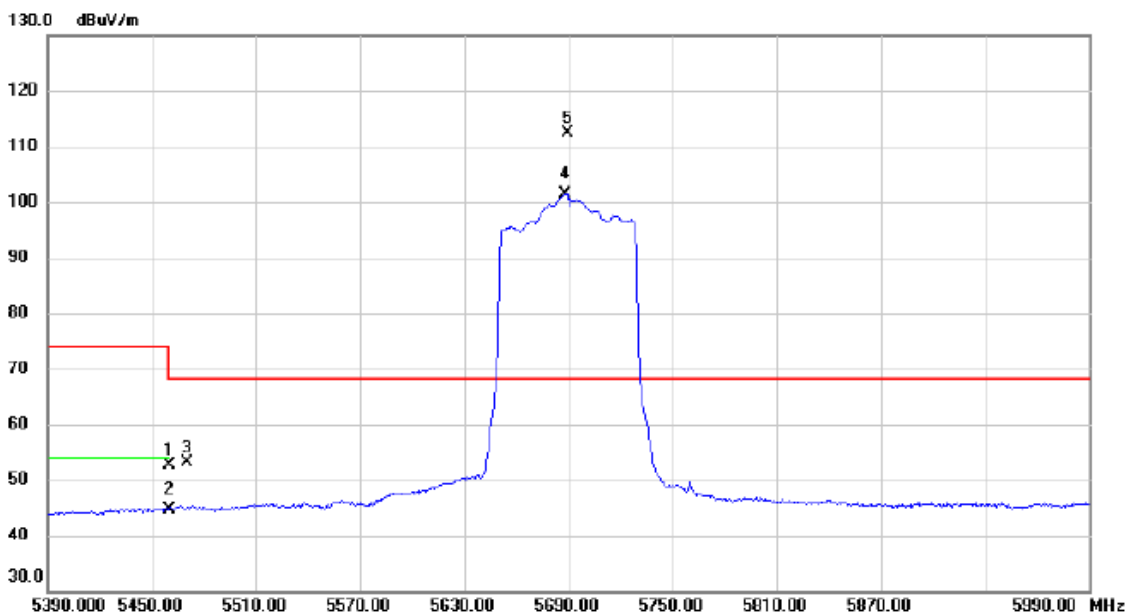


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	36.72	15.79	52.51	74.00	-21.49	peak	
2		5460.000	28.94	15.79	44.73	54.00	-9.27	AVG	
3		5470.000	37.19	15.83	53.02	68.20	-15.18	peak	
4	X	5688.200	84.90	16.56	101.46	68.20	33.26	AVG	No Limit
5	*	5689.400	95.89	16.56	112.45	68.20	44.25	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5690 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

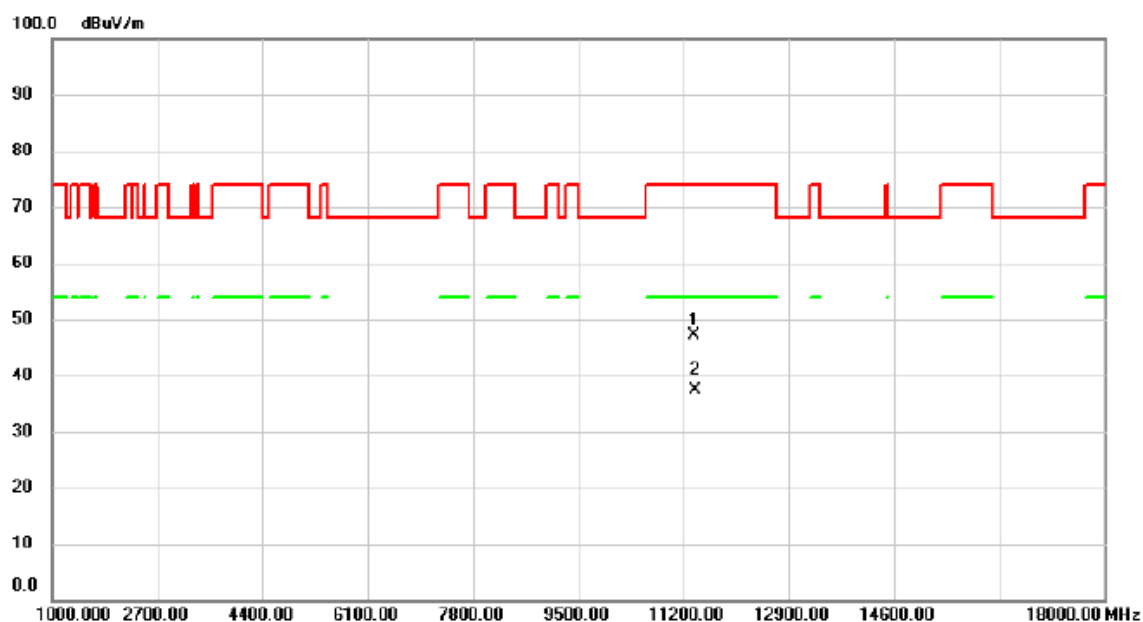


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11380.320	37.90	9.24	47.14	74.00	-26.86	peak	
2	*	11390.160	28.05	9.22	37.27	54.00	-16.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Worst Case:

Test Mode	UNII-2C_TX AC(VHT40) Mode 5710 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

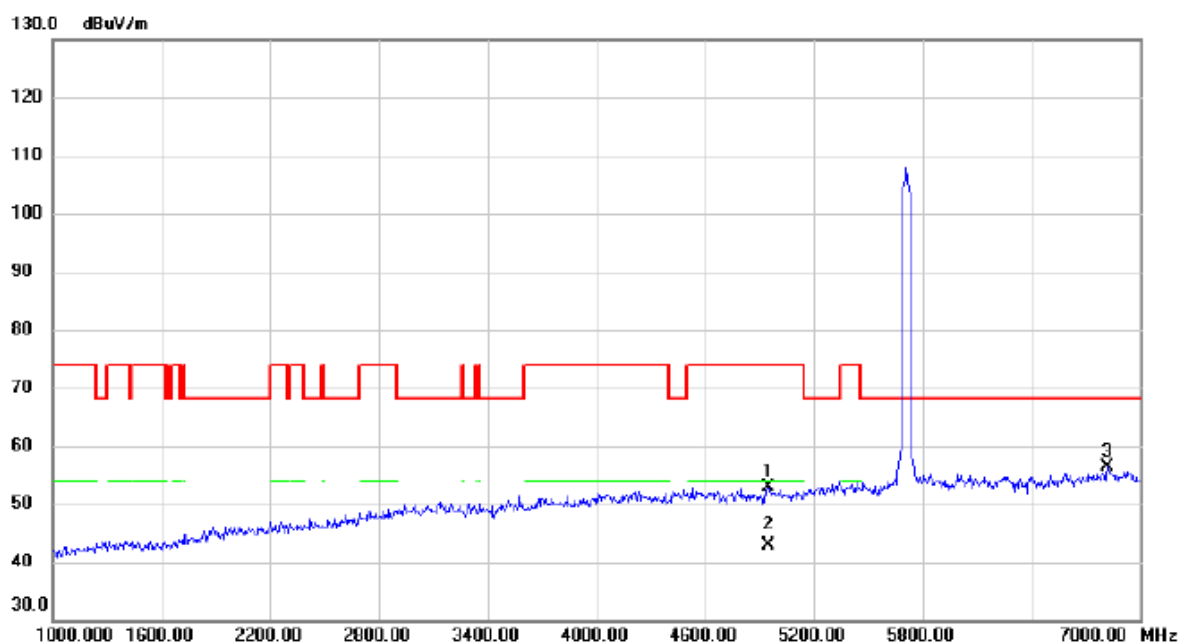


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4948.000	38.28	14.55	52.83	74.00	-21.17	peak	
2	*	4948.000	28.28	14.55	42.83	54.00	-11.17	AVG	
3		6820.000	37.18	19.22	56.40	68.20	-11.80	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5710 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

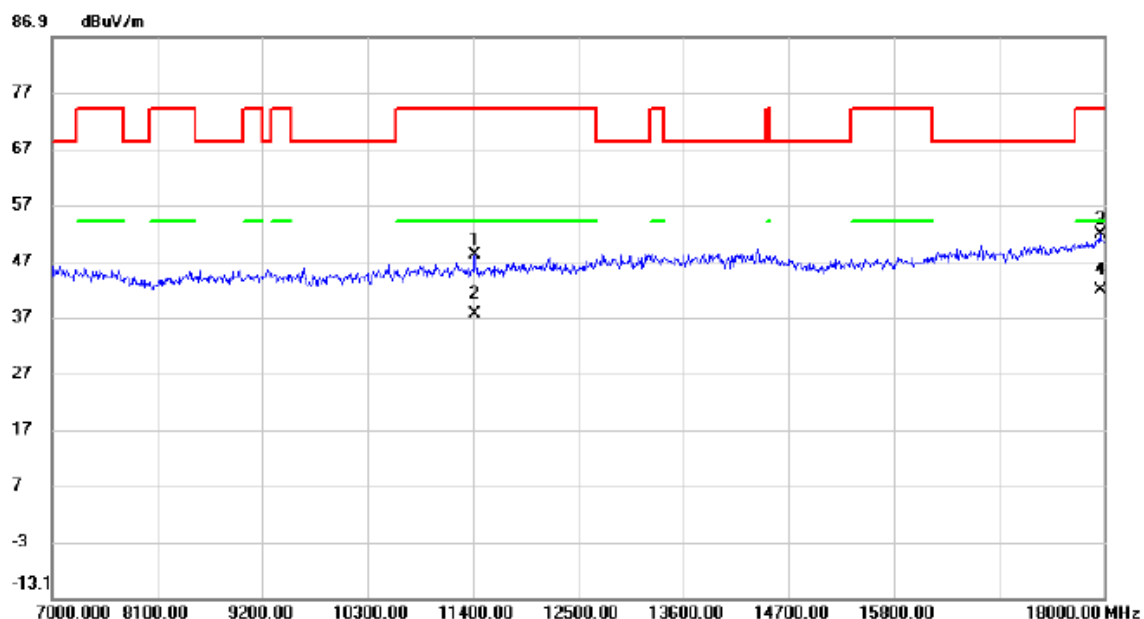


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11422.000	38.80	9.18	47.98	74.00	-26.02	peak	
2		11422.000	28.44	9.18	37.62	54.00	-16.38	AVG	
3		17956.000	40.17	11.60	51.77	74.00	-22.23	peak	
4	*	17956.000	30.07	11.60	41.67	54.00	-12.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

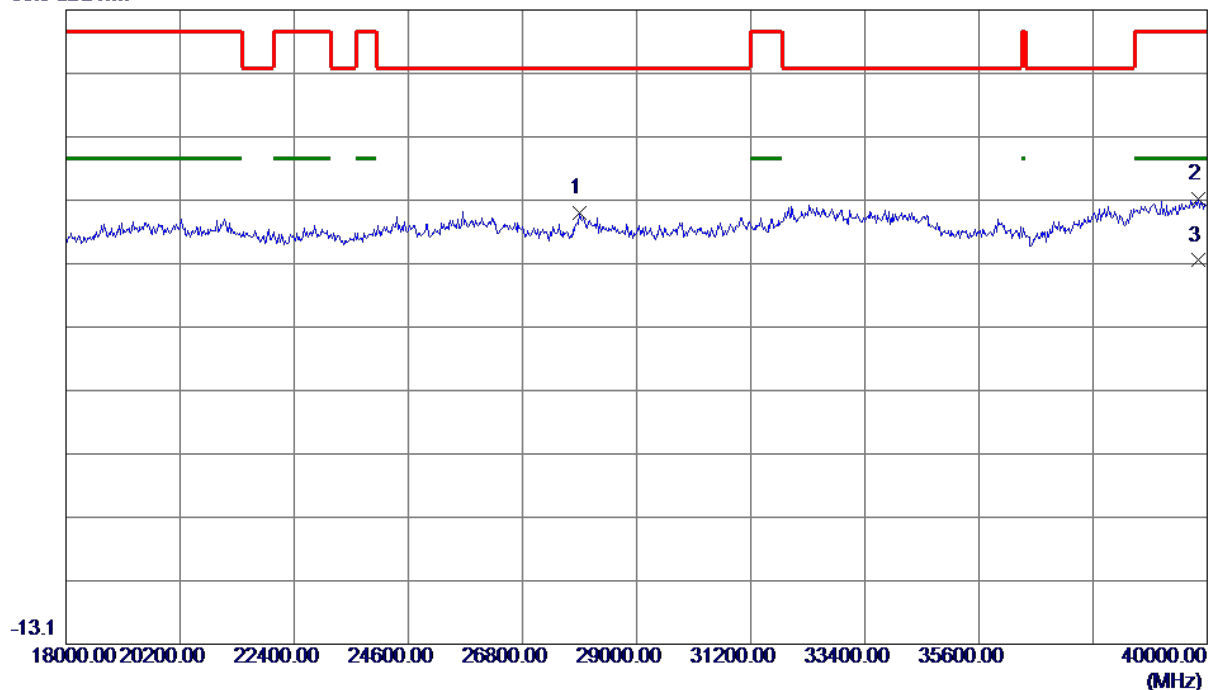


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	27900.0000	50.34	4.52	54.86	77.70	-22.84	Peak	
2	39824.0000	44.60	12.43	57.03	83.50	-26.47	Peak	
3 *	39824.0000	34.97	12.43	47.40	63.50	-16.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

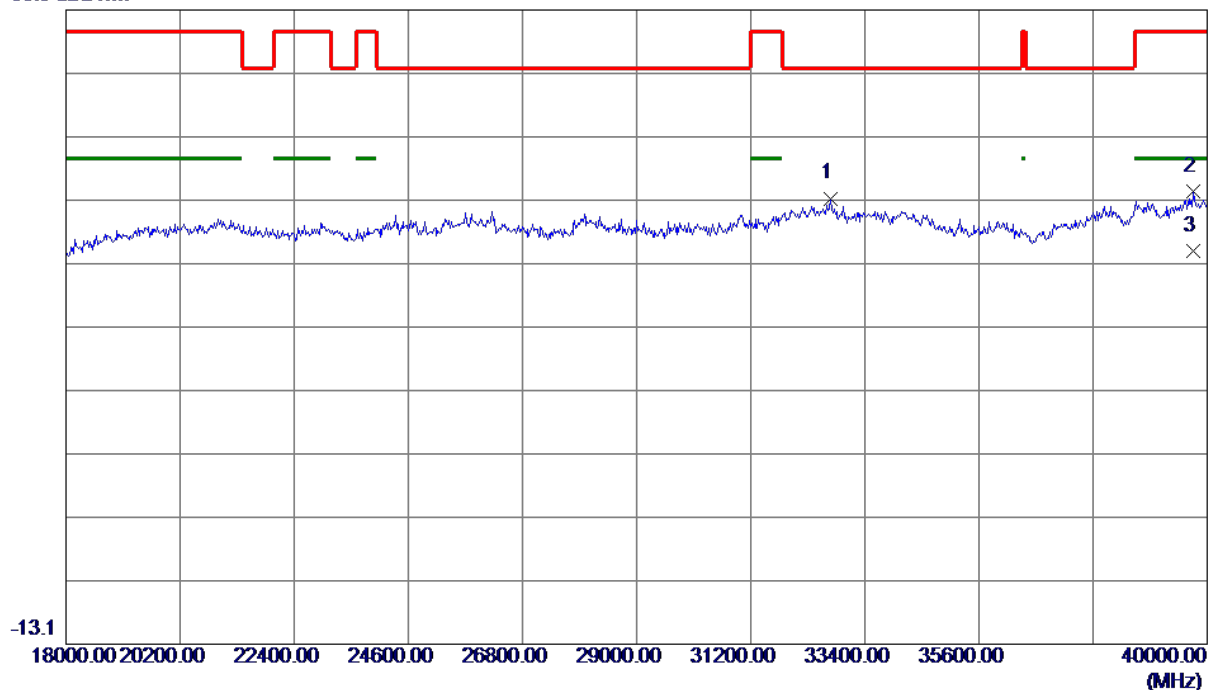

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	32740.0000	49.58	7.62	57.20	77.70	-20.50	Peak	
2	39736.0000	46.07	12.23	58.30	83.50	-25.20	Peak	
3 *	39736.0000	36.74	12.23	48.97	63.50	-14.53	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

5G_1


Test Mode	UNII-1_TX A Mode
-----------	------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	18.660	16.403
40	5200	18.720	16.336
48	5240	19.560	16.352


CH36

CH40 26 dB Bandwidth

CH48

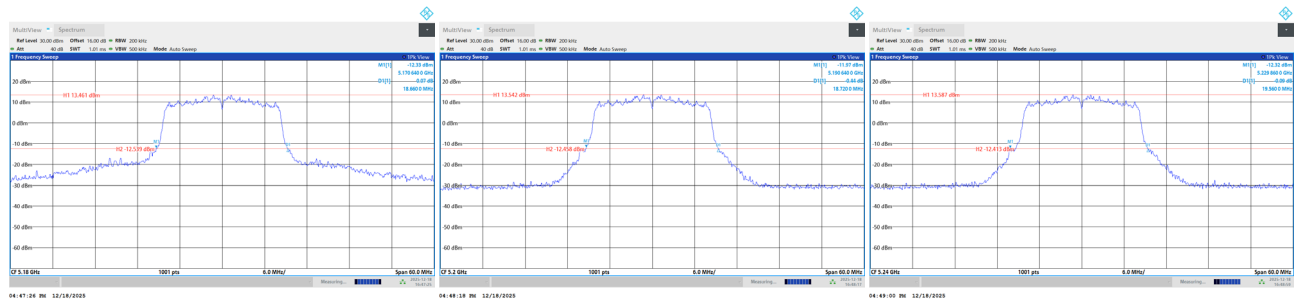

99 % Occupied Bandwidth

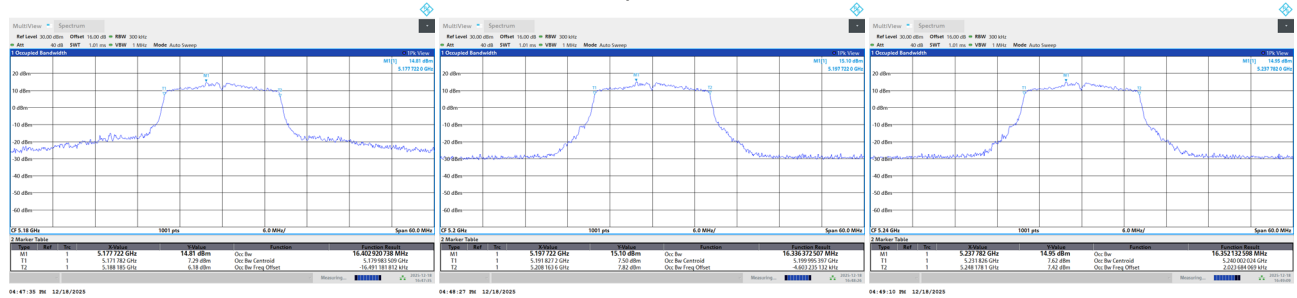


Test Mode	UNII-1_TX AC(VHT20) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	19.800	17.532
40	5200	20.100	17.551
48	5240	20.340	17.548


CH36

CH40
26 dB Bandwidth

CH48

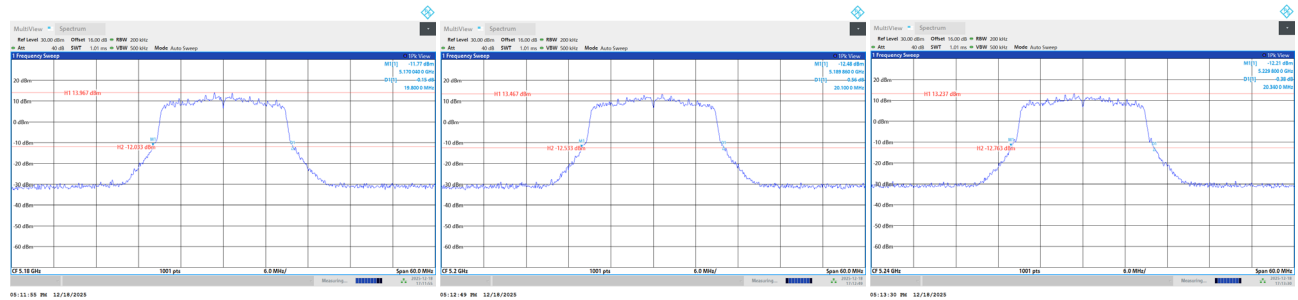


99 % Occupied Bandwidth

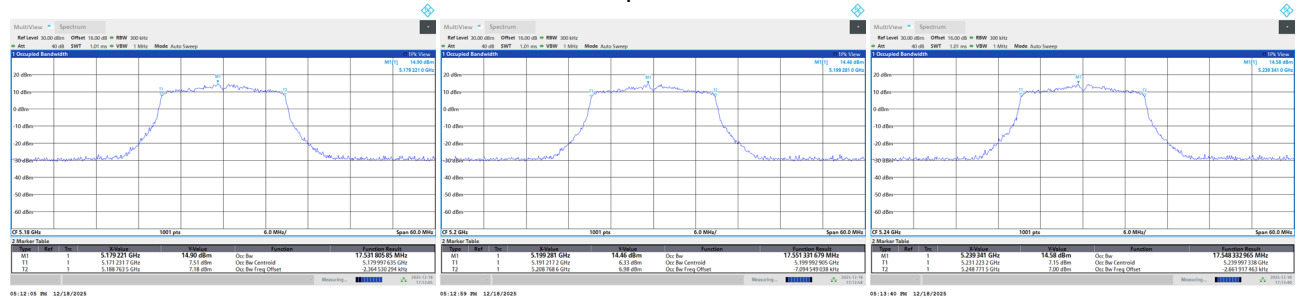


Test Mode	UNII-1_TX AC(VHT40) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	51.600	36.894
46	5230	43.300	36.316



CH38

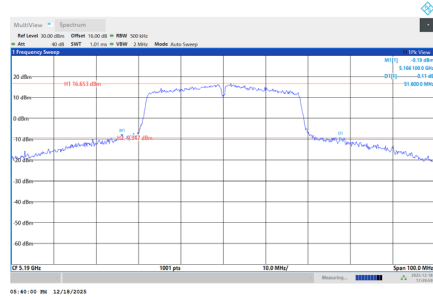

CH46
26 dB Bandwidth

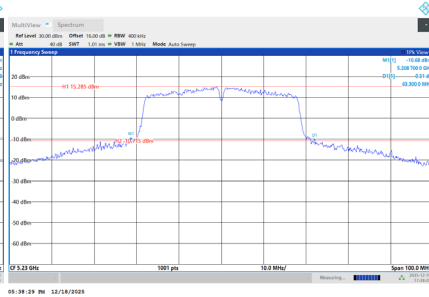


99 % Occupied Bandwidth

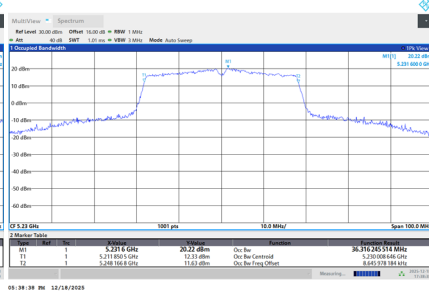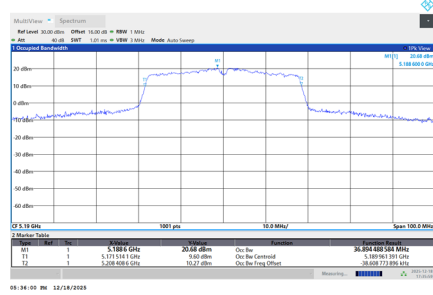


Test Mode	UNII-1_TX AC(VHT80) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	161.750	90.510

CH42 26 dB Bandwidth

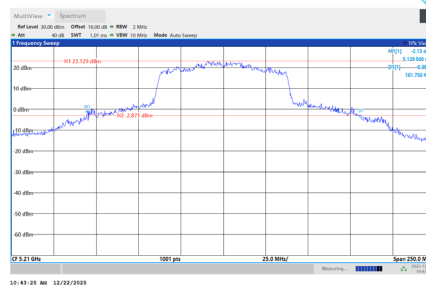

99 % Occupied Bandwidth

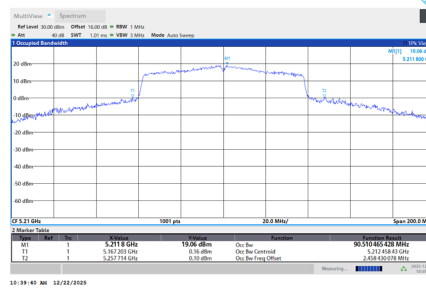


Test Mode	UNII-1_TX AX(HE20) Mode
-----------	-------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	21.000	18.895
40	5200	20.640	18.881
48	5240	20.880	18.903


CH36

CH40
26 dB Bandwidth

CH48

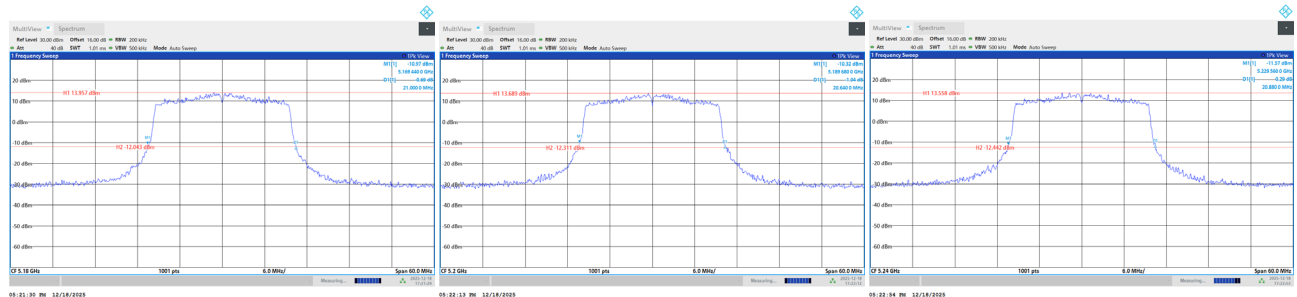

99 % Occupied Bandwidth

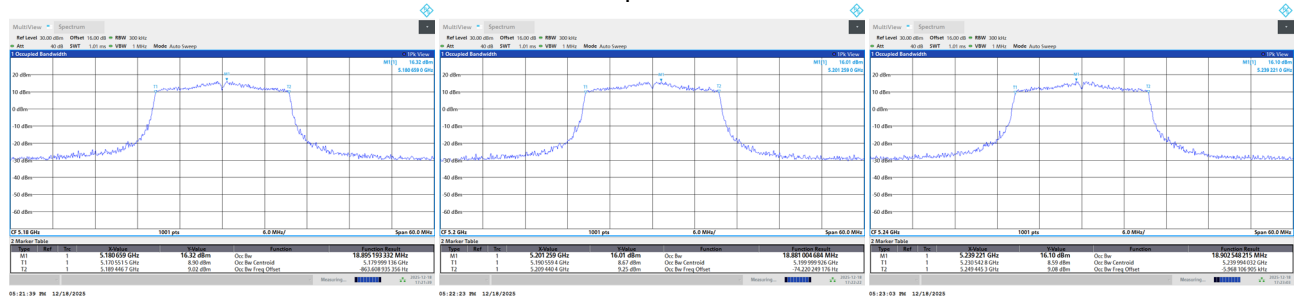


Test Mode	UNII-1_TX AX(HE40) Mode
-----------	-------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	43.900	38.148
46	5230	41.000	37.970



CH38



CH46
26 dB Bandwidth

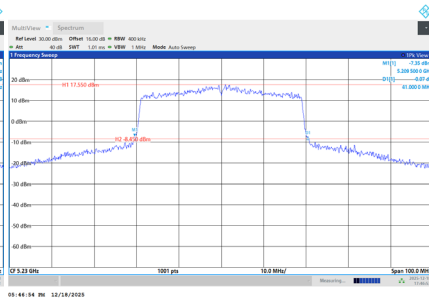


99 % Occupied Bandwidth

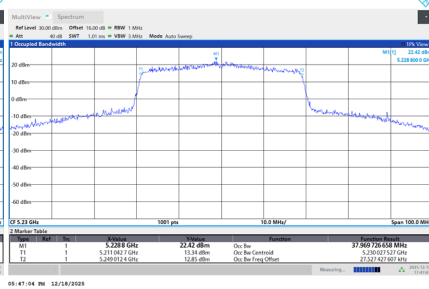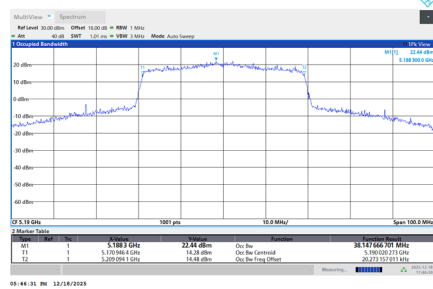


Test Mode	UNII-1_TX AX(HE80) Mode
-----------	-------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	144.600	82.997

CH42 26 dB Bandwidth

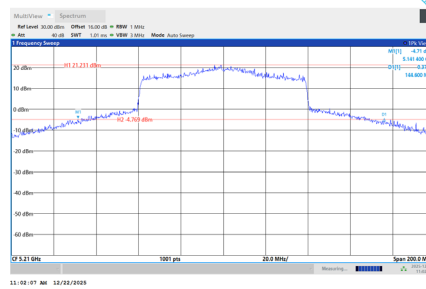

99 % Occupied Bandwidth

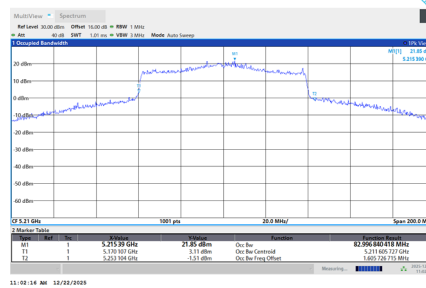


Test Mode	UNII-2A_TX A Mode
-----------	-------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	19.560	16.380
60	5300	19.800	16.382
64	5320	19.500	16.370


CH52

CH60
26 dB Bandwidth

CH64

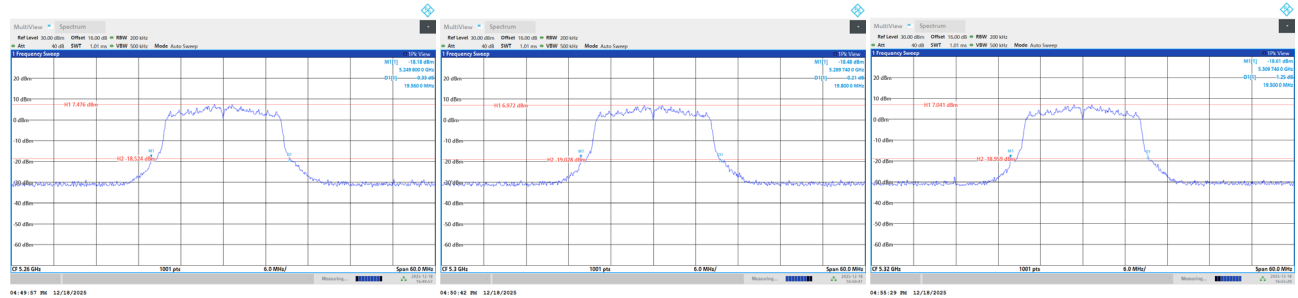

99 % Occupied Bandwidth

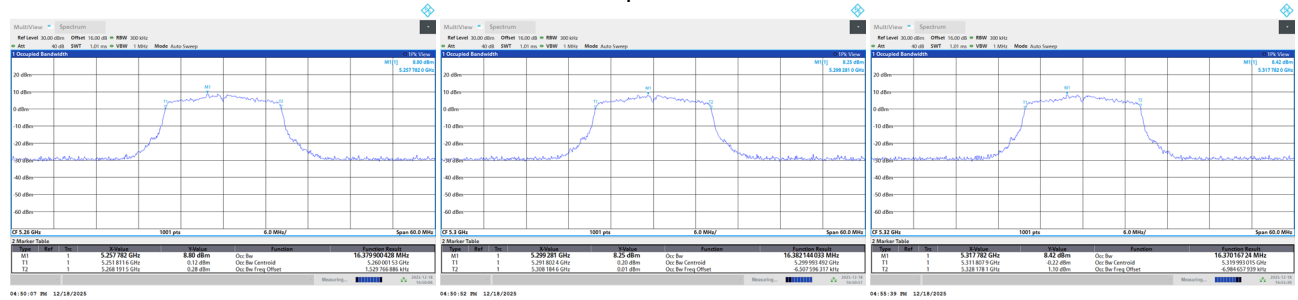


Test Mode	UNII-2A_TX AC(VHT20) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	19.800	17.568
60	5300	19.860	17.584
64	5320	20.160	17.580


CH52

CH60
26 dB Bandwidth

CH64

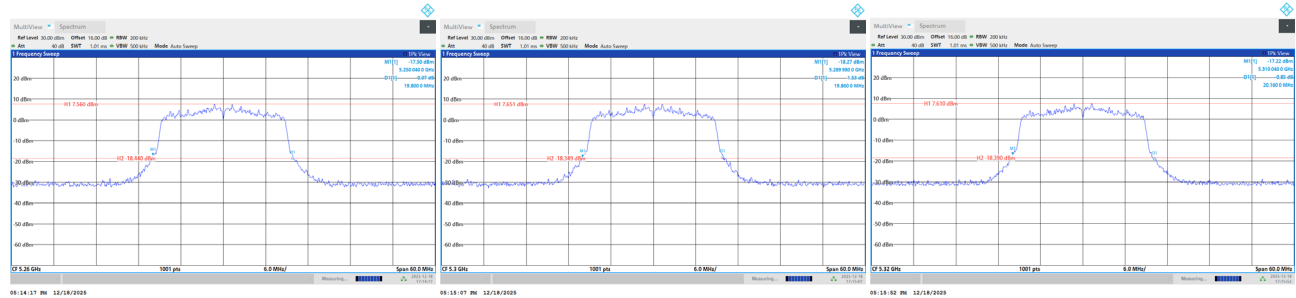

99 % Occupied Bandwidth

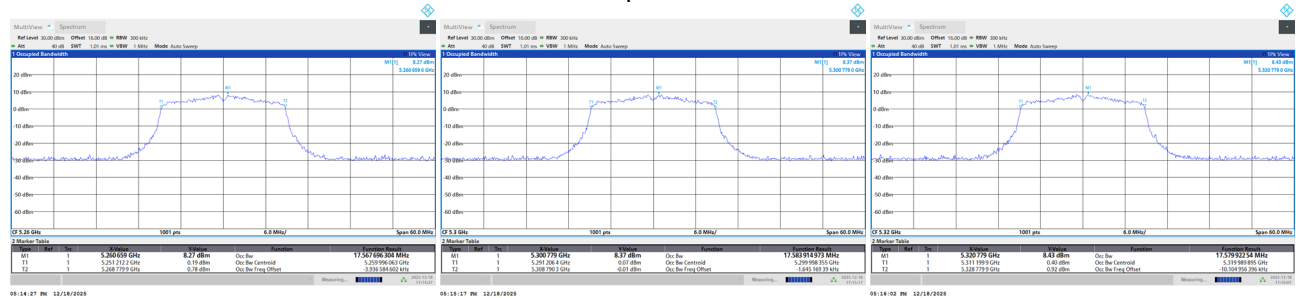


Test Mode	UNII-2A_TX AC(VHT40) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	39.600	36.063
62	5310	39.400	36.087

CH54

CH62
26 dB Bandwidth

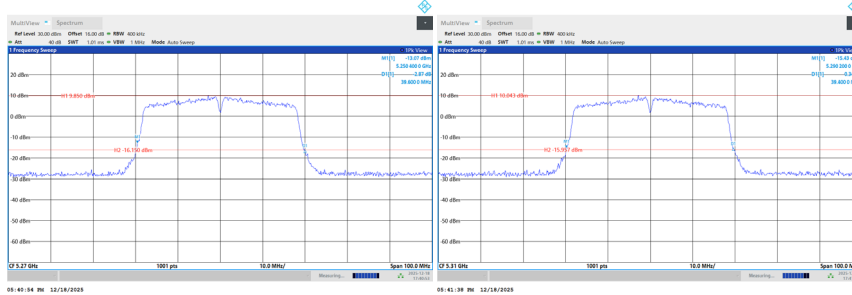


99 % Occupied Bandwidth

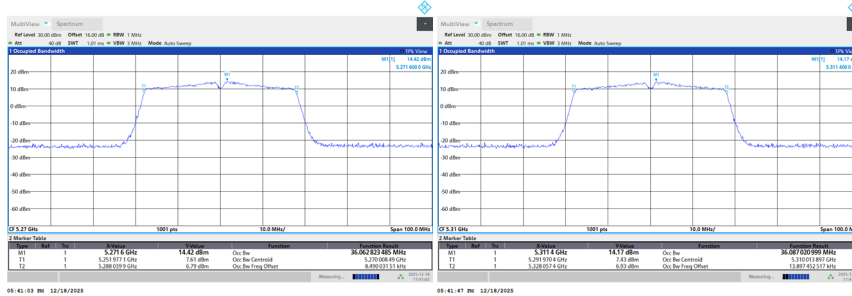


Test Mode	UNII-2A_TX AC(VHT80) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	80.800	75.042

CH58 26 dB Bandwidth

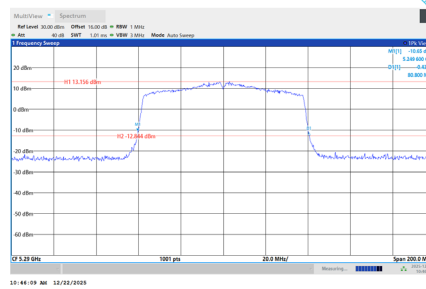

99 % Occupied Bandwidth

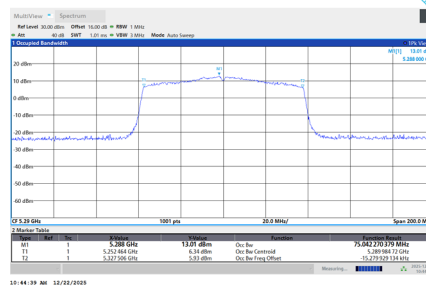


Test Mode	UNII-2A_TX AX(HE20) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	20.760	18.898
60	5300	20.760	18.908
64	5320	20.940	18.920


CH52

CH60
26 dB Bandwidth

CH64

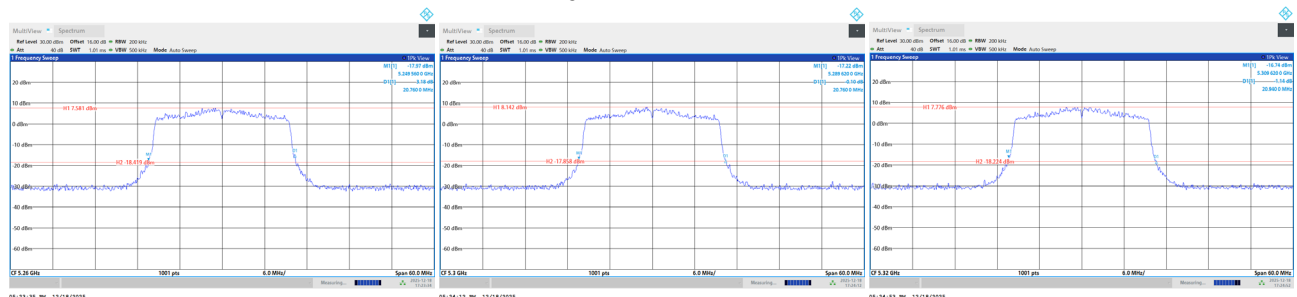


99 % Occupied Bandwidth

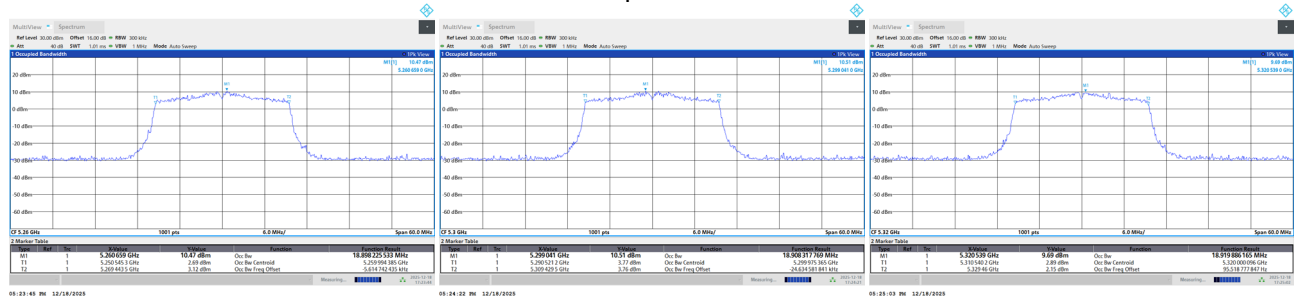


Test Mode UNII-2A_TX AX(HE40) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	40.000	37.739
62	5310	39.900	37.824



CH54

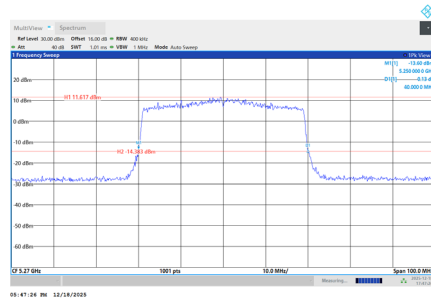

CH62
26 dB Bandwidth

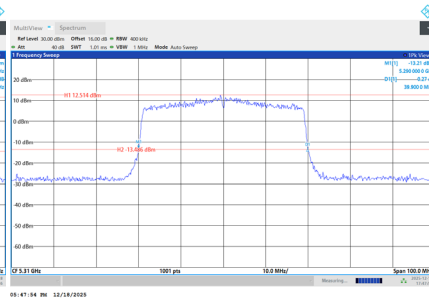


99 % Occupied Bandwidth

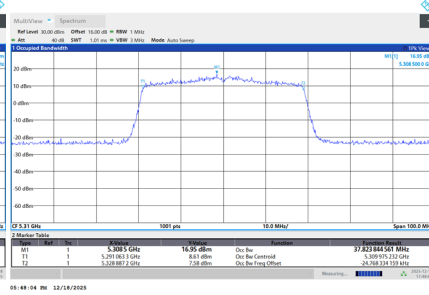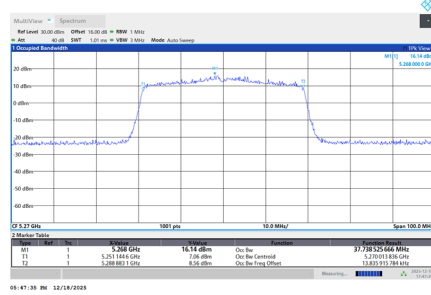


Test Mode	UNII-2A_TX AX(HE80) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	81.800	76.944

CH58 26 dB Bandwidth

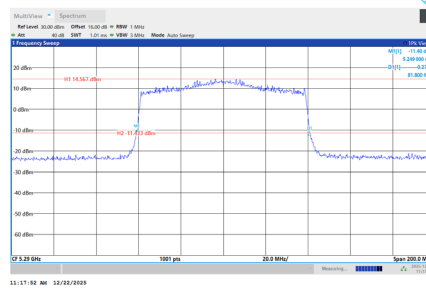


99 % Occupied Bandwidth

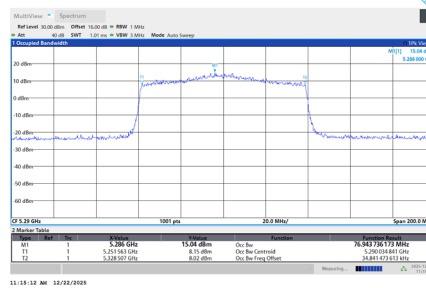


Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode
-----------	-----------------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
50	5250	164.000	154.085

CH50 26 dB Bandwidth

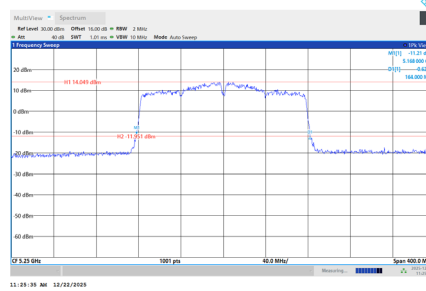


99 % Occupied Bandwidth

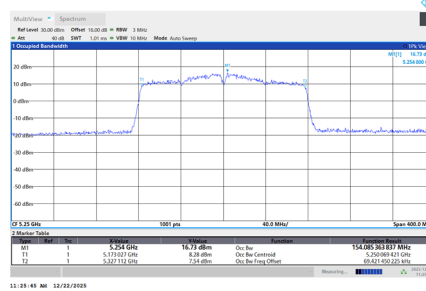


Test Mode	UNII-1+UNII-2A_TX AX(HE160) Mode
-----------	----------------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
50	5250	164.400	155.561

CH50 26 dB Bandwidth

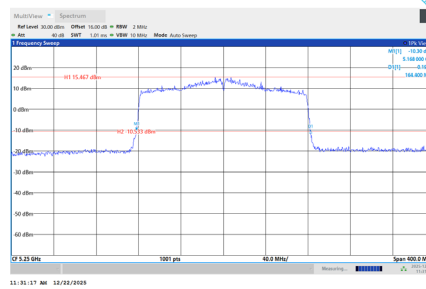

99 % Occupied Bandwidth

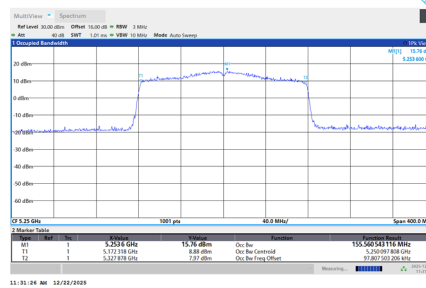


Test Mode	UNII-2C_TX A Mode
-----------	-------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	19.740	16.378
116	5580	19.620	16.370
140	5700	19.560	16.382


CH100

CH116
26 dB Bandwidth

CH140

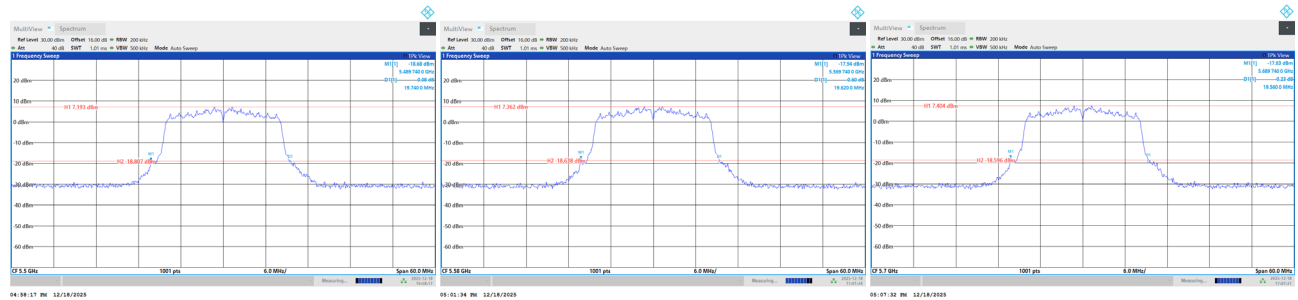

99 % Occupied Bandwidth

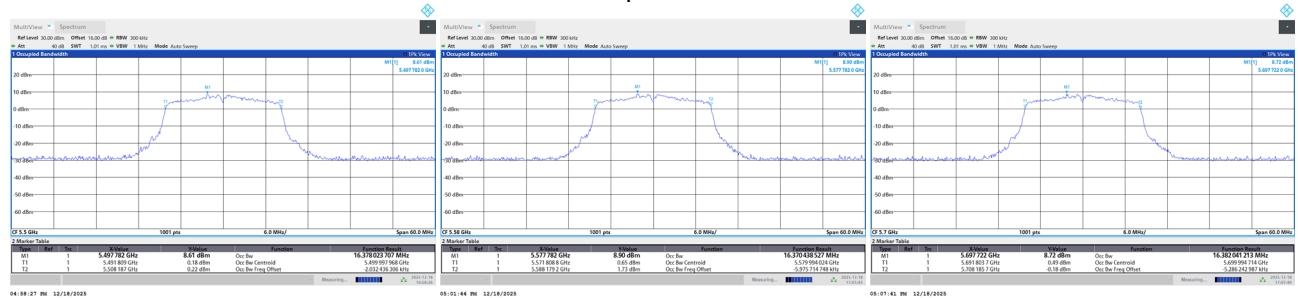


Test Mode	UNII-2C_TX AC(VHT20) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	20.040	17.591
116	5580	19.860	17.580
140	5700	20.340	17.581


CH100

CH116
26 dB Bandwidth

CH140

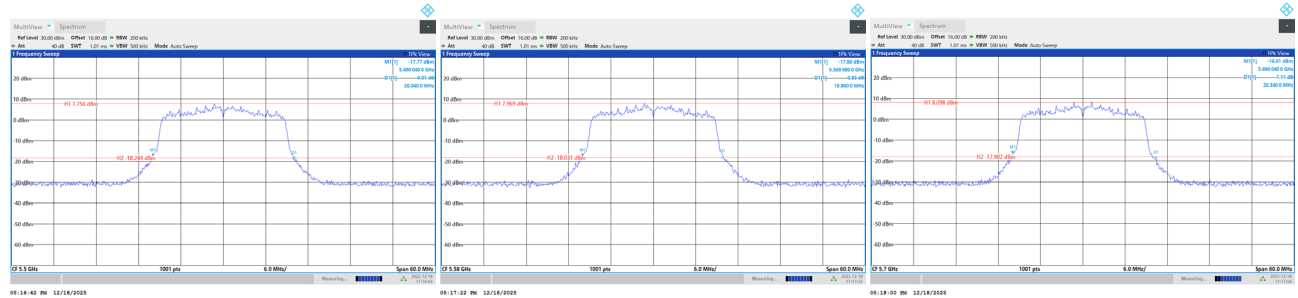

99 % Occupied Bandwidth

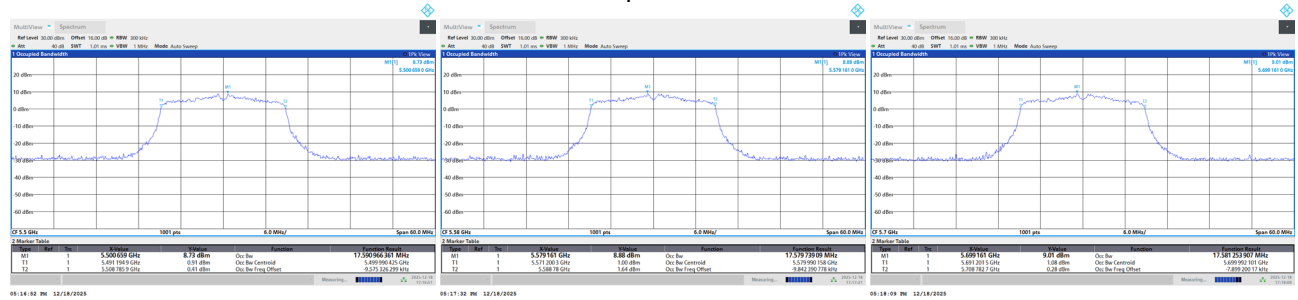


Test Mode	UNII-2C_TX AC(VHT40) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
102	5510	39.800	36.060
110	5550	39.400	36.083
134	5670	39.700	36.042


CH102

CH110
26 dB Bandwidth

CH134

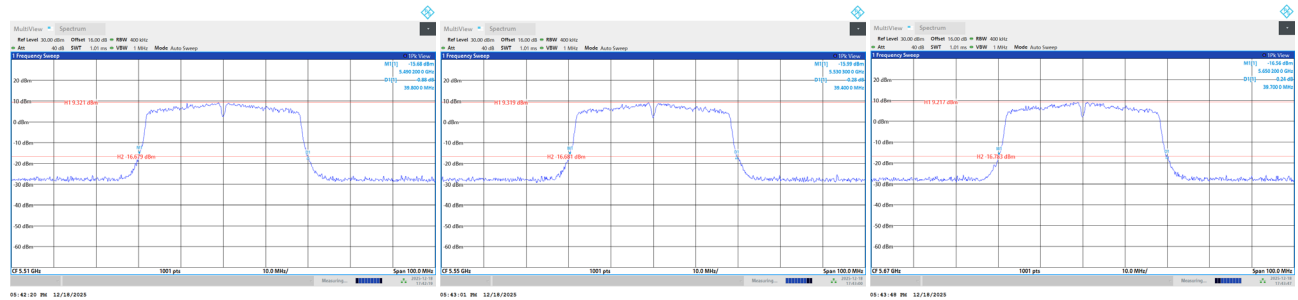


99 % Occupied Bandwidth

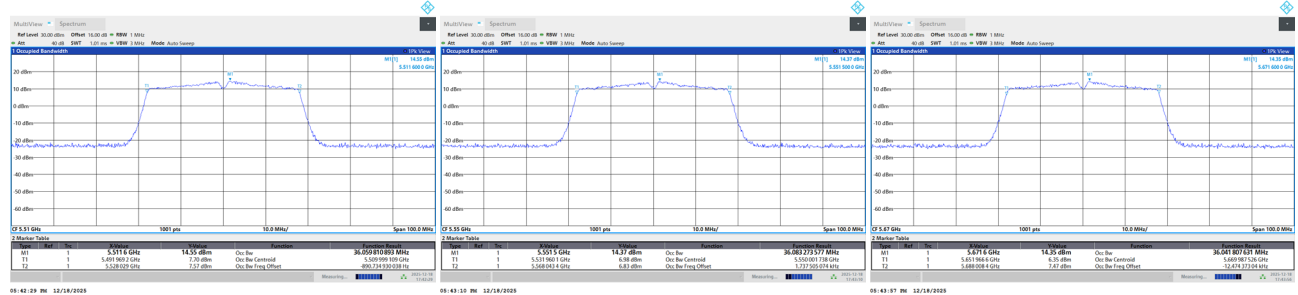


Test Mode	UNII-2C_TX AC(VHT80) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
106	5530	80.600	75.076
122	5610	81.200	75.036



CH106

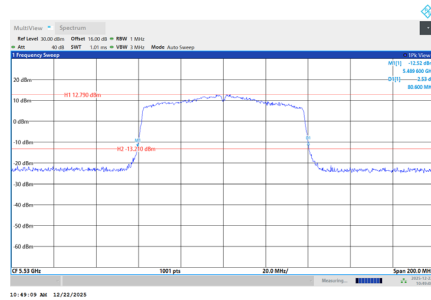

CH122
26 dB Bandwidth

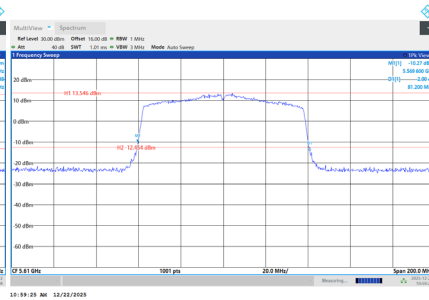


99 % Occupied Bandwidth

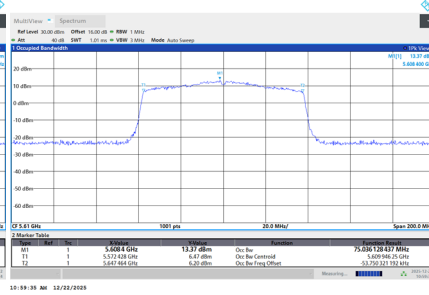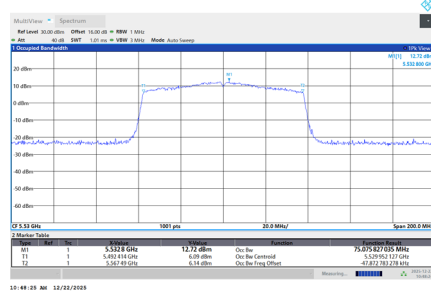

Test Mode	UNII-2C_TX AC(VHT160) Mode
-----------	----------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
114	5570	164.400	154.205

CH114 26 dB Bandwidth

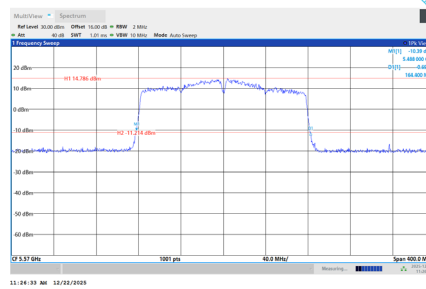

99 % Occupied Bandwidth

