


Test Mode TX G Mode

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	16.400	17.443	0.5	Pass
06	2437	16.400	17.450	0.5	Pass
11	2462	16.360	17.497	0.5	Pass


CH01

CH06
6 dB Bandwidth

CH11

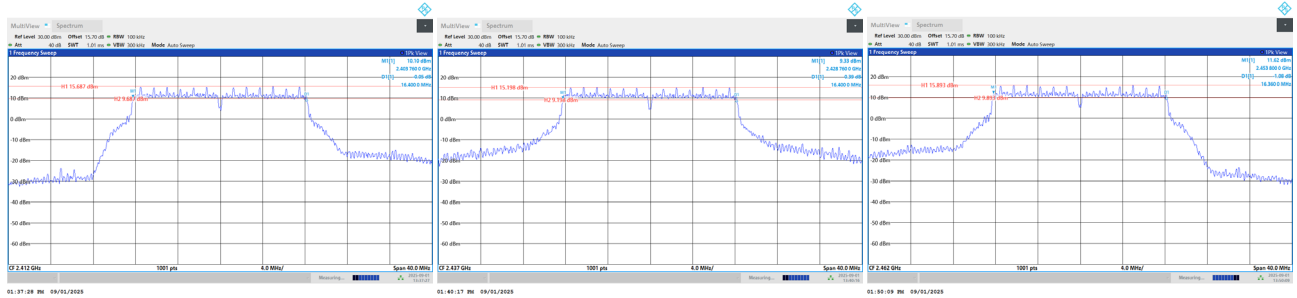

99 % Occupied Bandwidth

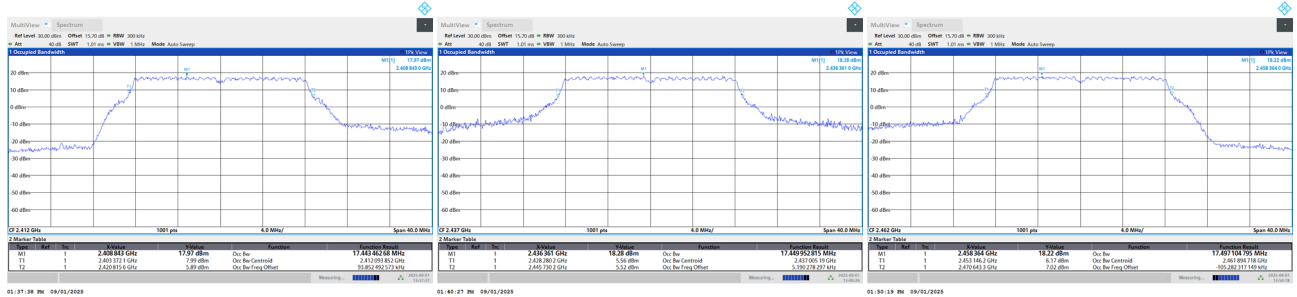


Test Mode	TX N(HT20) Mode
-----------	-----------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	17.600	18.179	0.5	Pass
06	2437	17.600	18.403	0.5	Pass
11	2462	17.600	18.226	0.5	Pass


CH01

CH06
6 dB Bandwidth

CH11

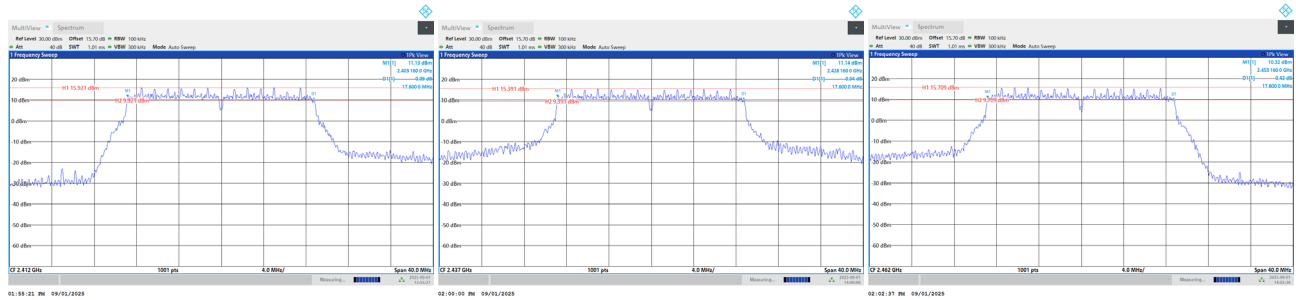

99 % Occupied Bandwidth

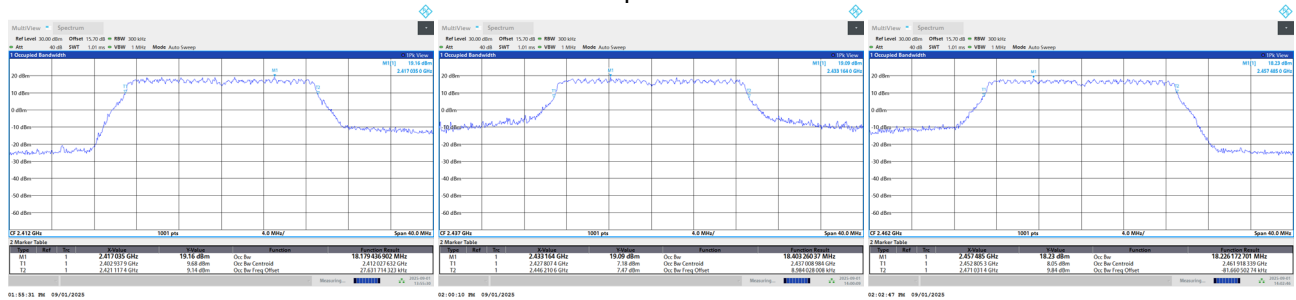


Test Mode	TX N(HT40) Mode
-----------	-----------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
03	2422	36.320	36.858	0.5	Pass
06	2437	36.320	37.329	0.5	Pass
09	2452	36.320	36.945	0.5	Pass


CH03

CH06
6 dB Bandwidth

CH09

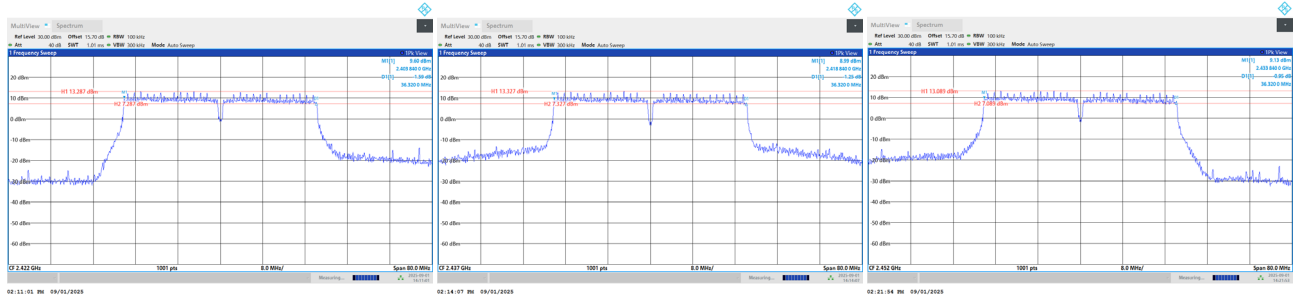

99 % Occupied Bandwidth

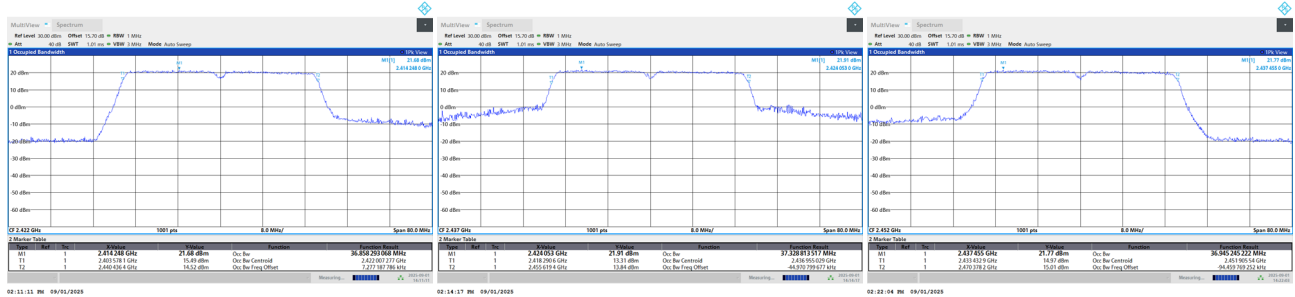


Test Mode	TX BE(EHT20) Mode
-----------	-------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	18.920	19.271	0.5	Pass
06	2437	18.960	19.356	0.5	Pass
11	2462	18.920	19.273	0.5	Pass


CH01

CH06
6 dB Bandwidth

CH11

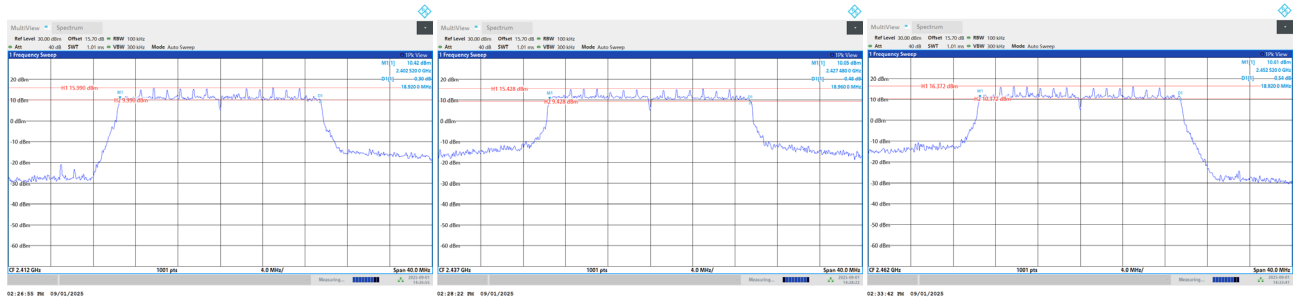

99 % Occupied Bandwidth

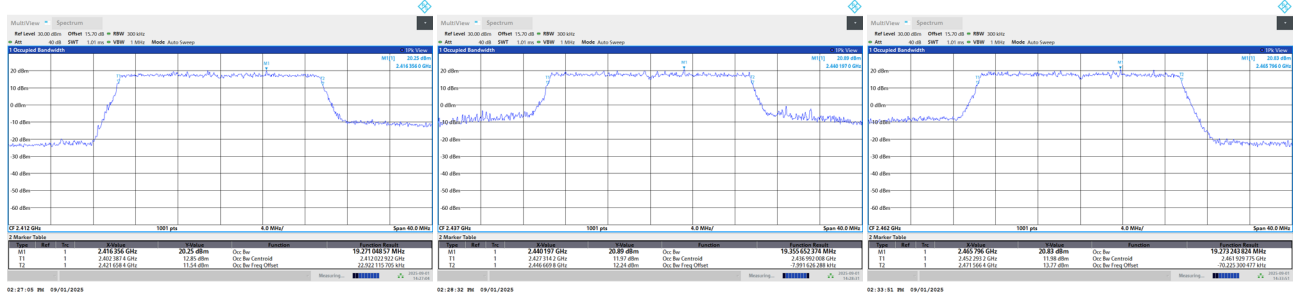


Test Mode	TX BE(EHT40) Mode
-----------	-------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
03	2422	37.760	38.115	0.5	Pass
06	2437	37.760	38.211	0.5	Pass
09	2452	37.760	38.165	0.5	Pass


CH03

CH06
6 dB Bandwidth

CH09

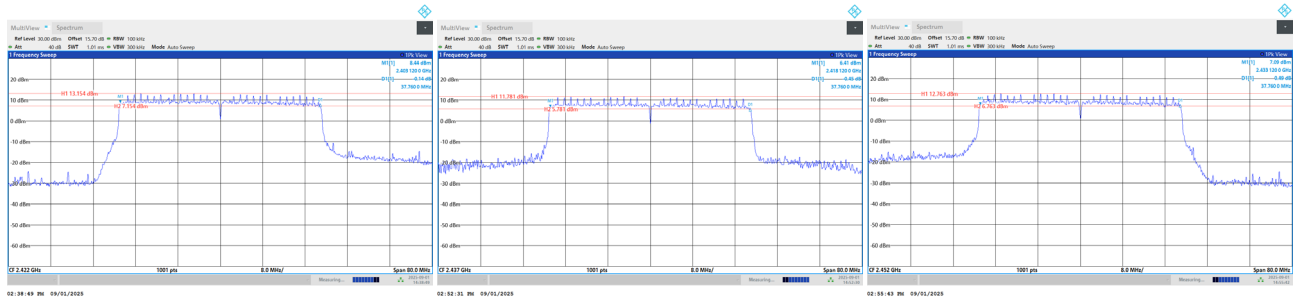

99 % Occupied Bandwidth

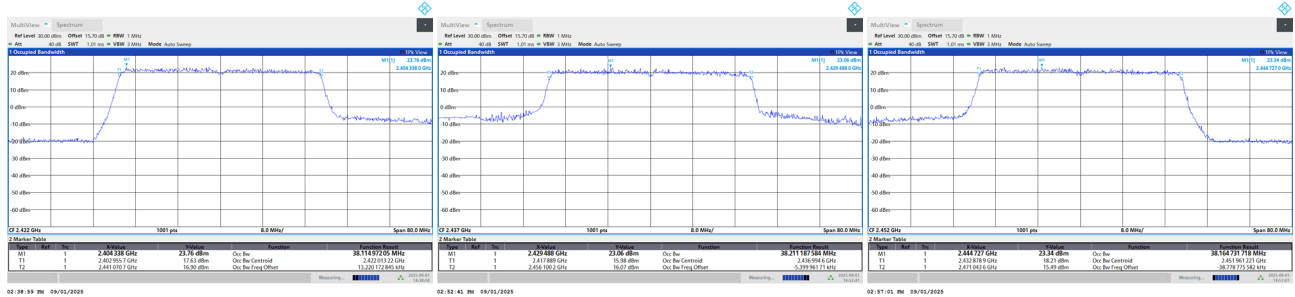

APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode	TX B Mode_Ant 1
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	23.12	0.23	23.35	30.00	1.0000	Pass
06	2437	22.94	0.23	23.17	30.00	1.0000	Pass
11	2462	22.17	0.23	22.40	30.00	1.0000	Pass

Test Mode	TX B Mode_Ant 2
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.79	0.23	23.02	30.00	1.0000	Pass
06	2437	23.07	0.23	23.30	30.00	1.0000	Pass
11	2462	22.54	0.23	22.77	30.00	1.0000	Pass

Test Mode	TX B Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	26.20	30.00	1.0000	Pass
06	2437	26.25	30.00	1.0000	Pass
11	2462	25.60	30.00	1.0000	Pass

Test Mode	TX G Mode_Ant 1
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	20.18	0.24	20.42	30.00	1.0000	Pass
06	2437	22.31	0.24	22.55	30.00	1.0000	Pass
11	2462	20.96	0.24	21.20	30.00	1.0000	Pass

Test Mode	TX G Mode_Ant 2
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.20	0.24	19.44	30.00	1.0000	Pass
06	2437	22.47	0.24	22.71	30.00	1.0000	Pass
11	2462	20.77	0.24	21.01	30.00	1.0000	Pass

Test Mode	TX G Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.97	30.00	1.0000	Pass
06	2437	25.64	30.00	1.0000	Pass
11	2462	24.11	30.00	1.0000	Pass

Test Mode	TX N(HT20) Mode_Ant 1
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	18.61	0.24	18.85	30.00	1.0000	Pass
06	2437	22.18	0.24	22.42	30.00	1.0000	Pass
11	2462	20.05	0.24	20.29	30.00	1.0000	Pass

Test Mode	TX N(HT20) Mode_Ant 2
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	18.64	0.24	18.88	30.00	1.0000	Pass
06	2437	22.36	0.24	22.60	30.00	1.0000	Pass
11	2462	19.95	0.24	20.19	30.00	1.0000	Pass

Test Mode	TX N(HT20) Mode_Total
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.87	30.00	1.0000	Pass
06	2437	25.52	30.00	1.0000	Pass
11	2462	23.25	30.00	1.0000	Pass

Test Mode	TX N(HT40) Mode_Ant 1
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	17.27	0.46	17.73	30.00	1.0000	Pass
06	2437	18.65	0.46	19.11	30.00	1.0000	Pass
09	2452	18.53	0.46	18.99	30.00	1.0000	Pass

Test Mode	TX N(HT40) Mode_Ant 2
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	17.17	0.46	17.63	30.00	1.0000	Pass
06	2437	18.71	0.46	19.17	30.00	1.0000	Pass
09	2452	18.56	0.46	19.02	30.00	1.0000	Pass

Test Mode	TX N(HT40) Mode_Total
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	20.69	30.00	1.0000	Pass
06	2437	22.15	30.00	1.0000	Pass
09	2452	22.01	30.00	1.0000	Pass

Test Mode	TX BE(EHT20) Mode_Ant 1
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.94	0.11	17.05	30.00	1.0000	Pass
06	2437	22.58	0.11	22.69	30.00	1.0000	Pass
11	2462	18.94	0.11	19.05	30.00	1.0000	Pass

Test Mode	TX BE(EHT20) Mode_Ant 2
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.97	0.11	17.08	30.00	1.0000	Pass
06	2437	22.79	0.11	22.90	30.00	1.0000	Pass
11	2462	18.96	0.11	19.07	30.00	1.0000	Pass

Test Mode	TX BE(EHT20) Mode_Total
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	20.07	30.00	1.0000	Pass
06	2437	25.80	30.00	1.0000	Pass
11	2462	22.07	30.00	1.0000	Pass

Test Mode	TX BE(EHT40) Mode_Ant 1
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	16.85	0.19	17.04	30.00	1.0000	Pass
06	2437	19.47	0.19	19.66	30.00	1.0000	Pass
09	2452	18.05	0.19	18.24	30.00	1.0000	Pass

Test Mode	TX BE(EHT40) Mode_Ant 2
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	16.89	0.19	17.08	30.00	1.0000	Pass
06	2437	19.24	0.19	19.43	30.00	1.0000	Pass
09	2452	18.19	0.19	18.38	30.00	1.0000	Pass

Test Mode	TX BE(EHT40) Mode_Total
-----------	-------------------------


Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	20.07	30.00	1.0000	Pass
06	2437	22.56	30.00	1.0000	Pass
09	2452	21.32	30.00	1.0000	Pass

Note: Output power = Measure result + Cable loss


APPENDIX G - CONDUCTED SPURIOUS EMISSIONS

Test Mode TX B Mode_Ant. 1


Reference Level-CH01

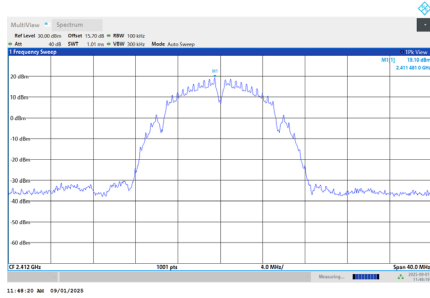


Reference Level-CH06

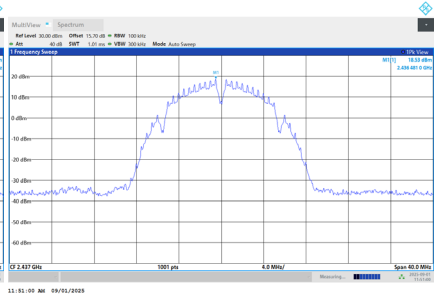


Reference Level-CH11

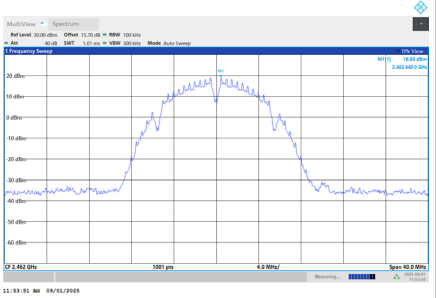


Bandedge-CH01

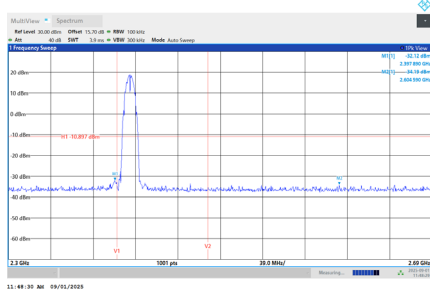


Bandedge-CH11

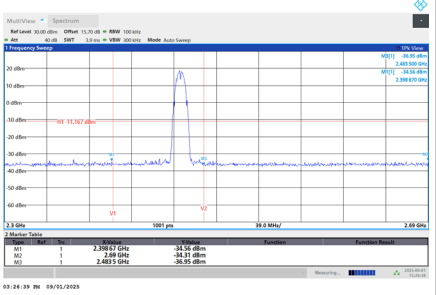


Harmonic-CH01

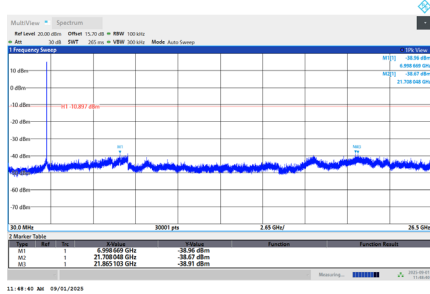

Harmonic-CH06

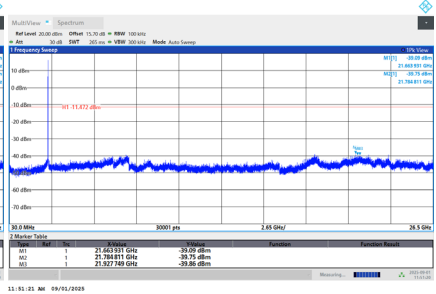


Harmonic-CH11

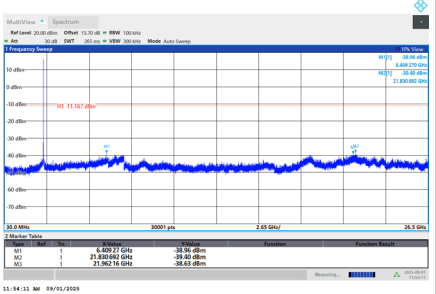


Test Mode TX B Mode_Ant. 2


Reference Level-CH01

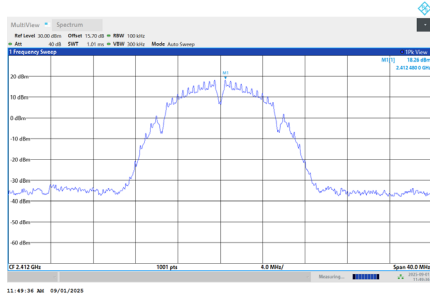


Reference Level-CH06

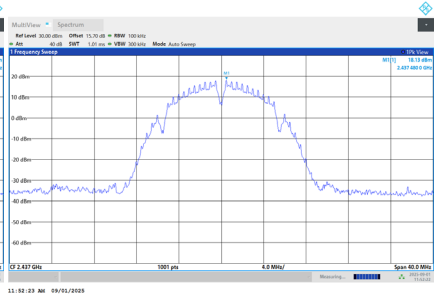


Reference Level-CH11

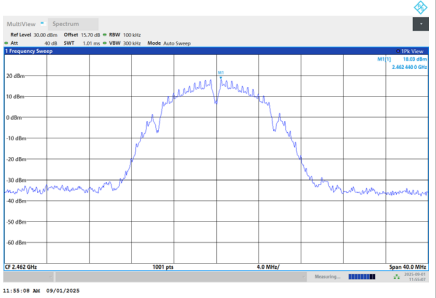


Bandedge-CH01

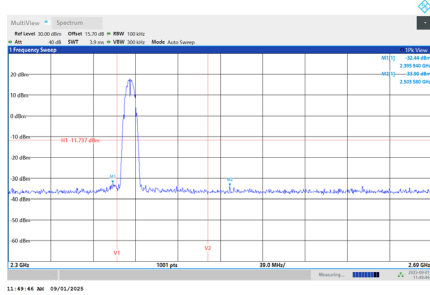


Bandedge-CH11

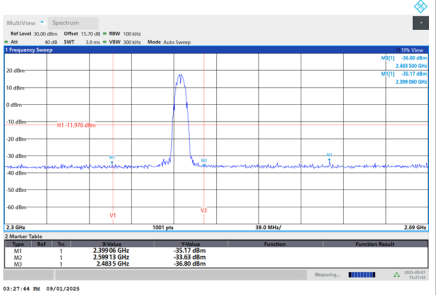


Harmonic-CH01

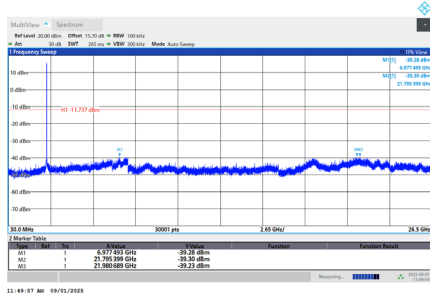

Harmonic-CH06

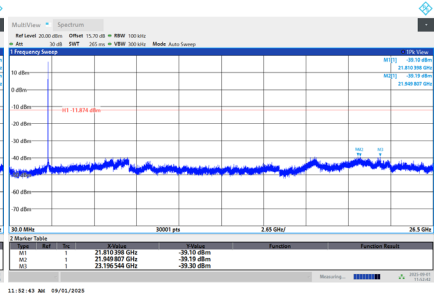


Harmonic-CH11

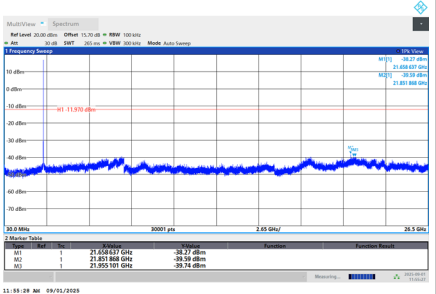


Test Mode TX G Mode_Ant. 1


Reference Level-CH01

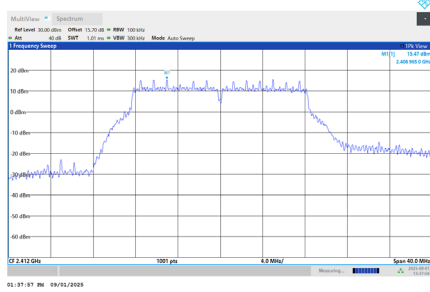


Reference Level-CH06

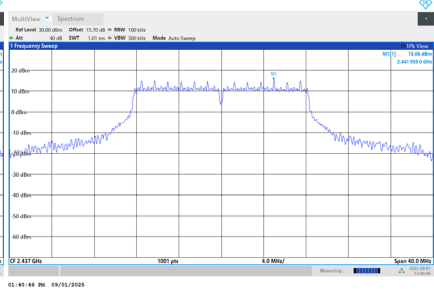


Reference Level-CH11

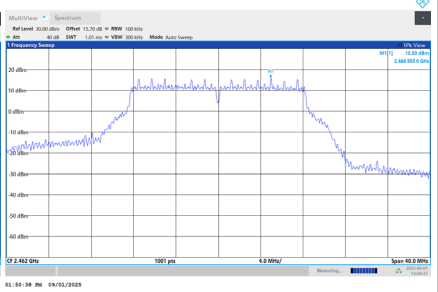


Bandedge-CH01

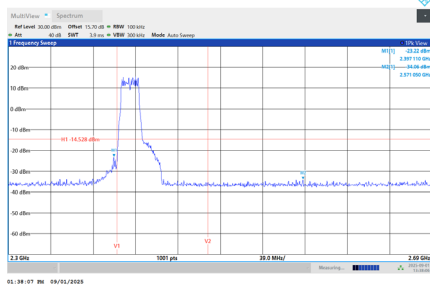


Bandedge-CH11

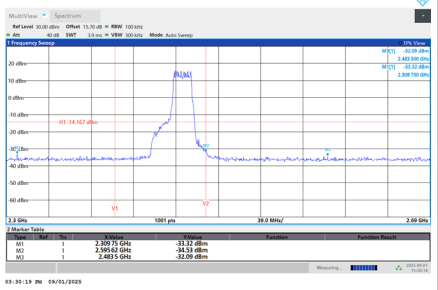


Harmonic-CH01

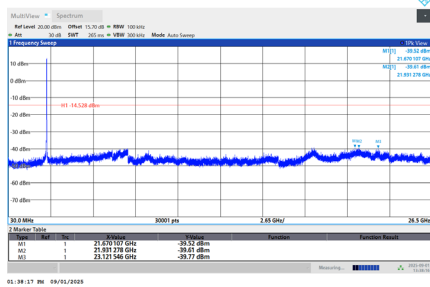

Harmonic-CH06

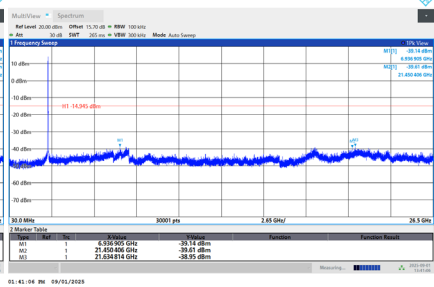


Harmonic-CH11

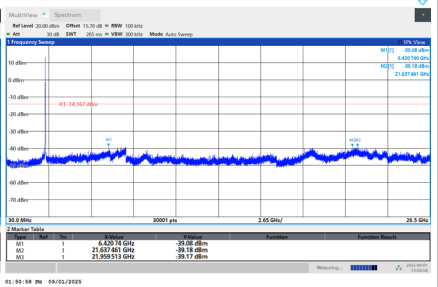


Test Mode TX G Mode_Ant. 2


Reference Level-CH01

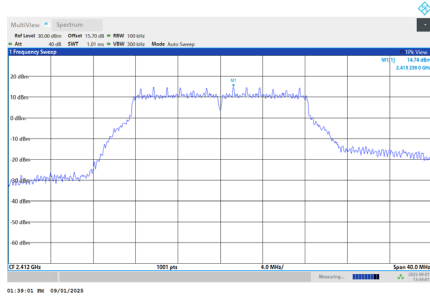


Reference Level-CH06

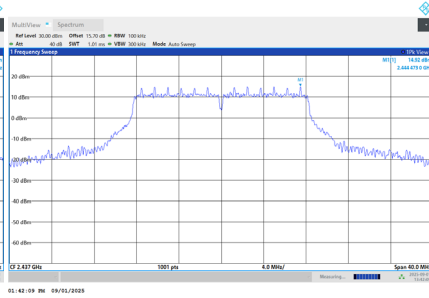


Reference Level-CH11

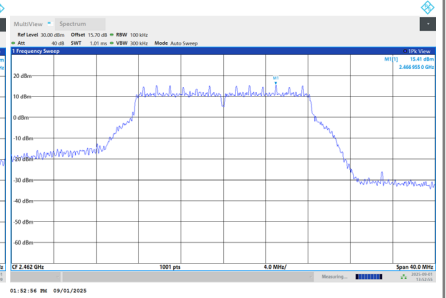


Bandedge-CH01

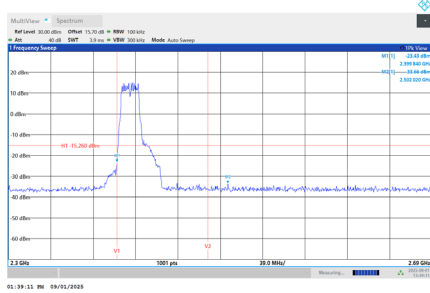


Bandedge-CH11

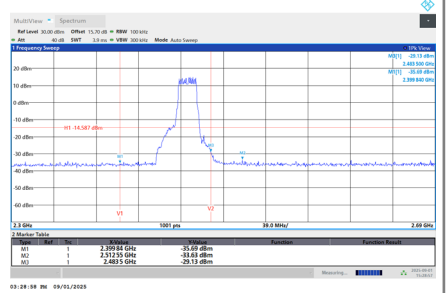


Harmonic-CH01

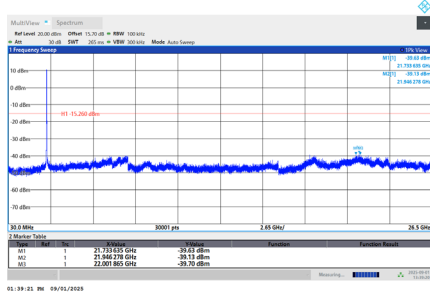

Harmonic-CH06

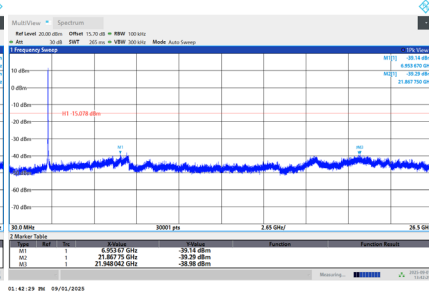


Harmonic-CH11

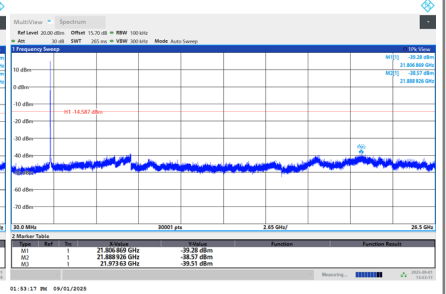


Test Mode TX N(HT20) Mode_Ant. 1


Reference Level-CH01

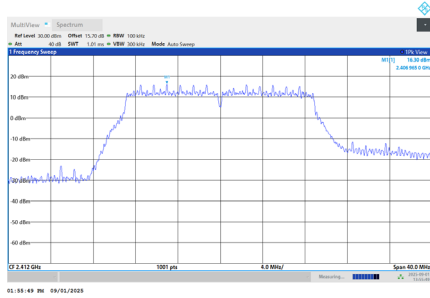


Reference Level-CH06

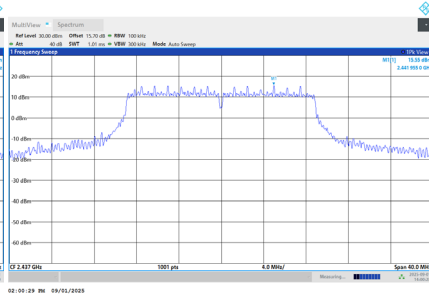


Reference Level-CH11

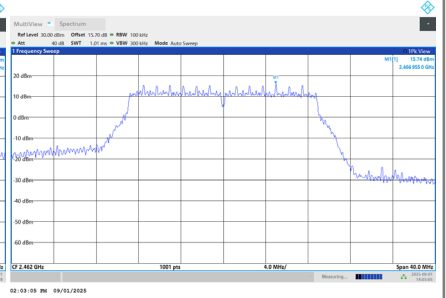


Bandedge-CH01

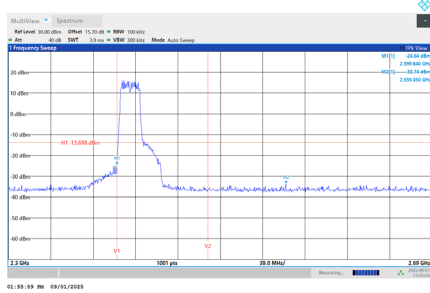


Bandedge-CH11

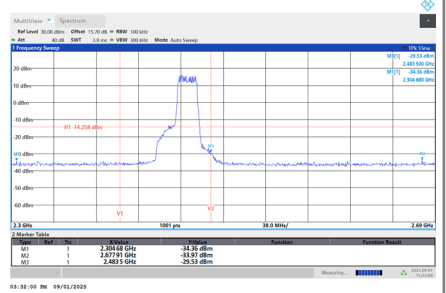


Harmonic-CH01

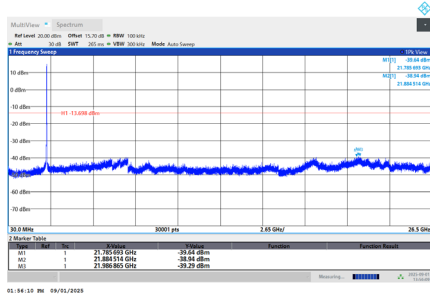

Harmonic-CH06

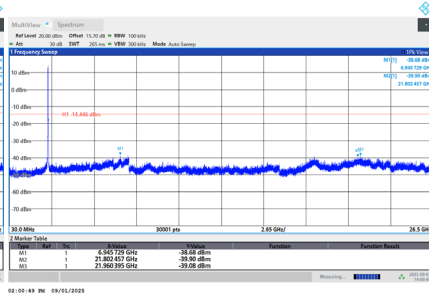


Harmonic-CH11

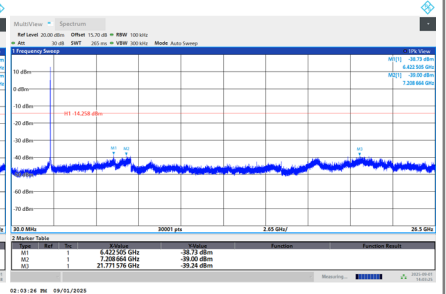


Test Mode TX N(HT20) Mode_Ant. 2


Reference Level-CH01

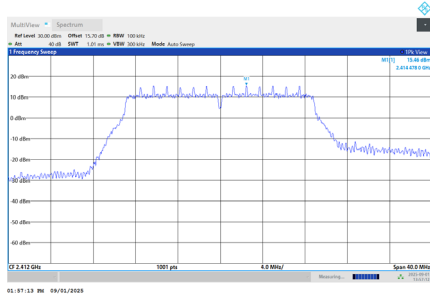


Reference Level-CH06

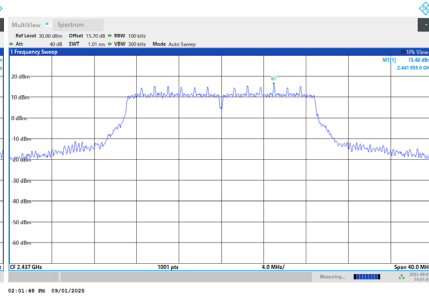


Reference Level-CH11

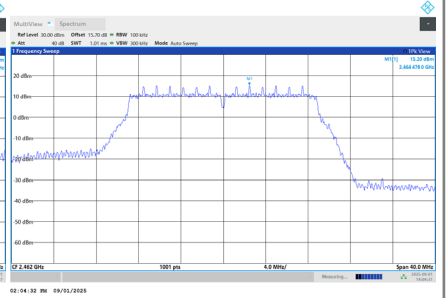


Bandedge-CH01

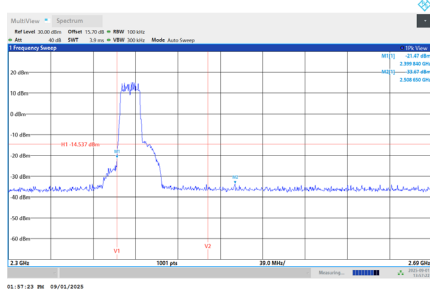


Bandedge-CH11

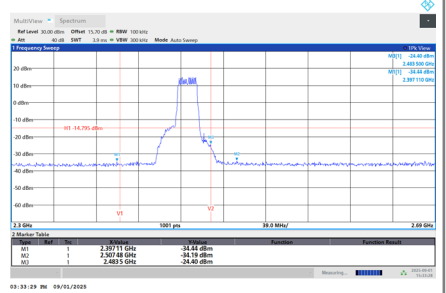

Harmonic-CH01

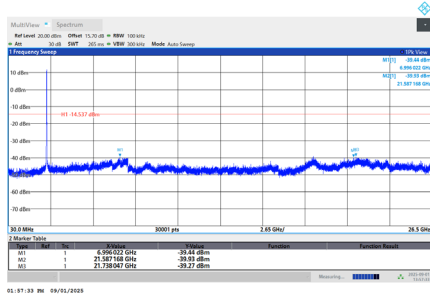

Harmonic-CH06

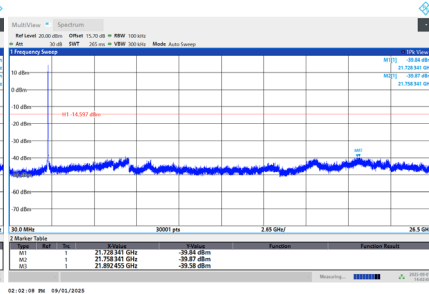

Harmonic-CH11

