



802.11ax-HE40 26 dB Bandwidth & 99% Bandwidth


Channel 38 (5190 MHz)

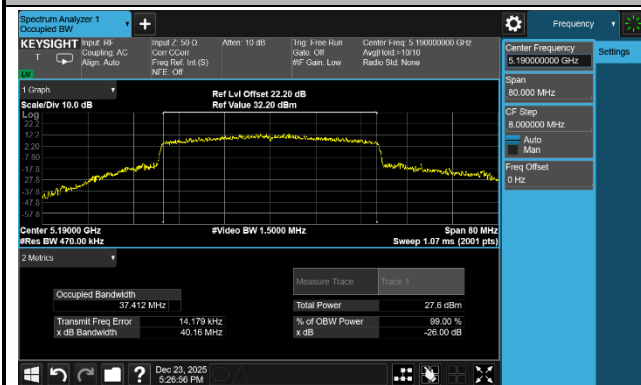


Channel 46 (5230 MHz)

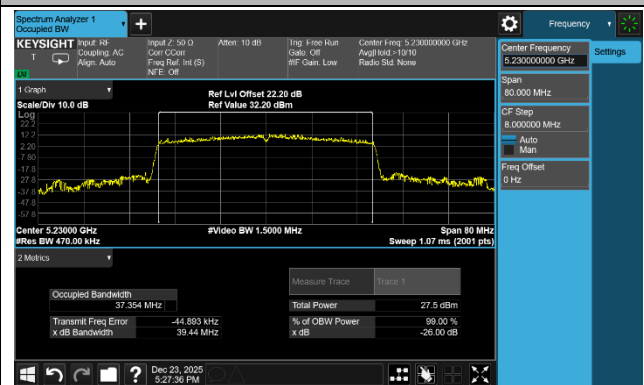


Channel 54 (5270 MHz)

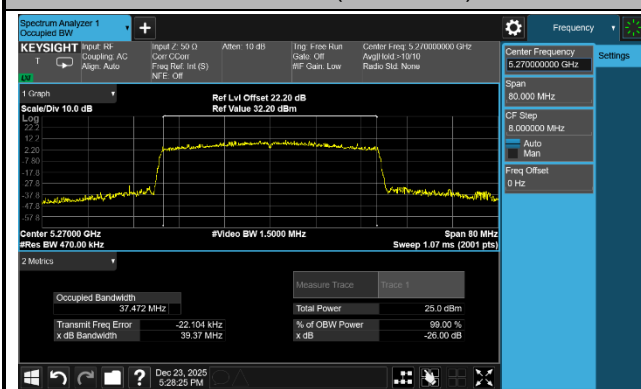


Channel 62 (5310 MHz)

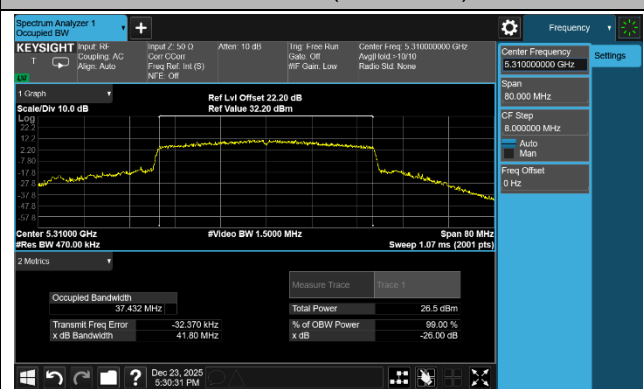


Channel 102 (5510 MHz)

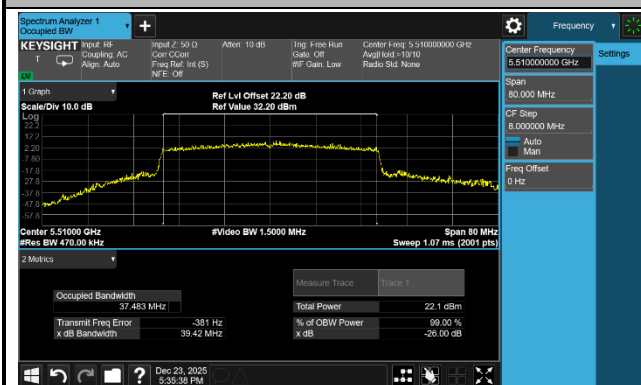


Channel 110 (5550 MHz)

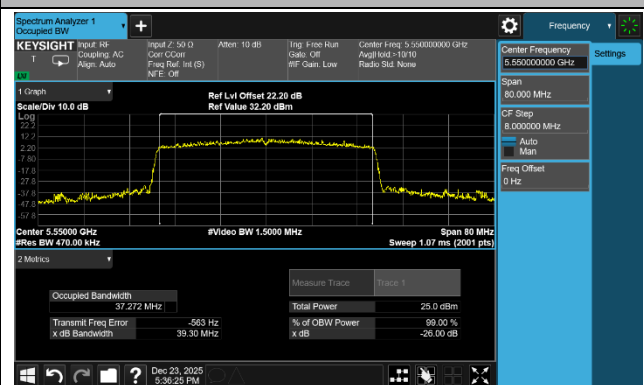


Channel 134 (5670 MHz)

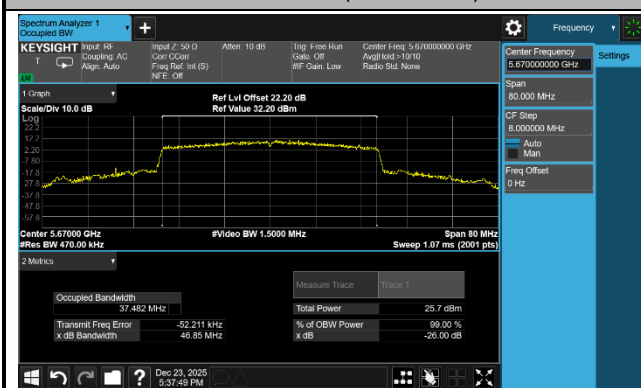

Channel 142 (5710 MHz)

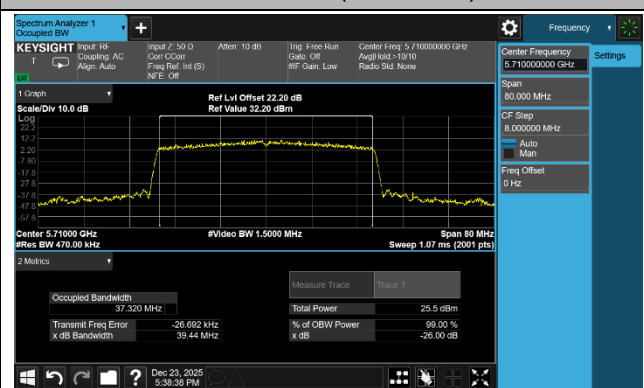

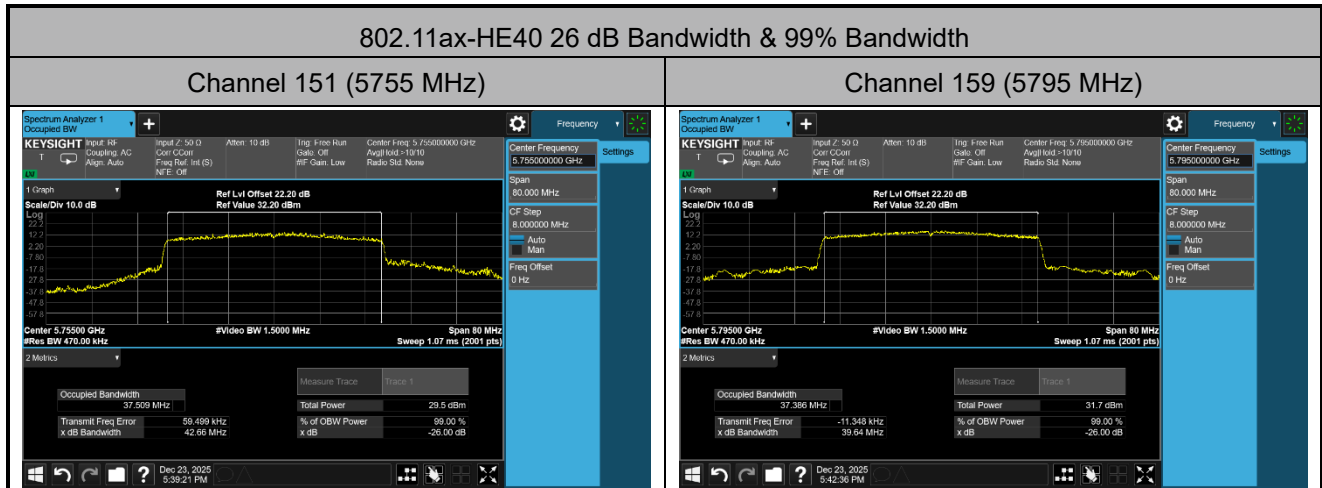


802.11ax-HE80 26 dB Bandwidth & 99% Bandwidth


Channel 42 (5210 MHz)




Channel 58 (5290 MHz)

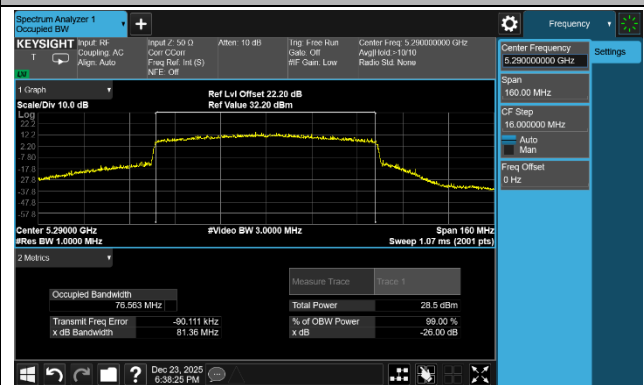


Channel 106 (5530 MHz)

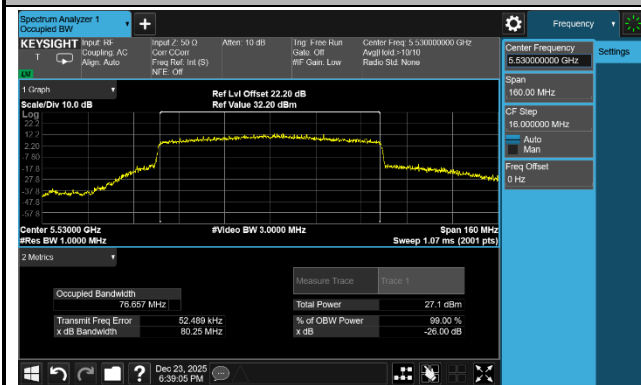


Channel 122 (5610 MHz)

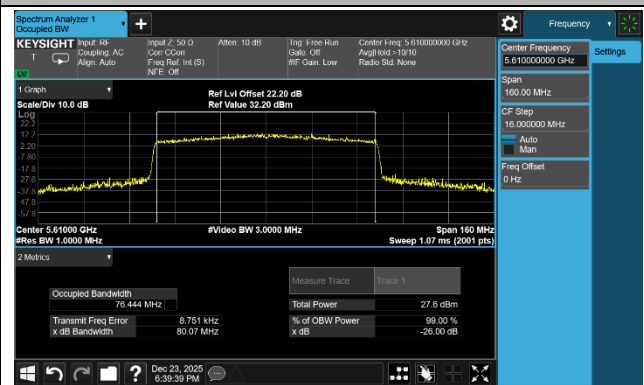


Channel 138 (5690 MHz)

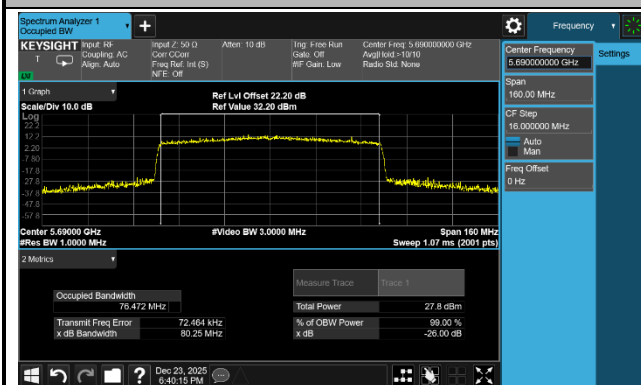

Channel 155 (5775 MHz)

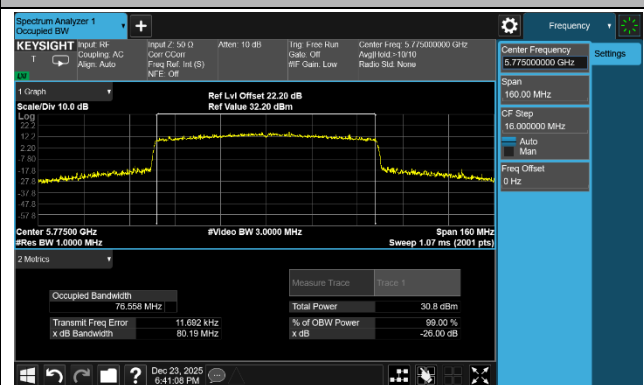


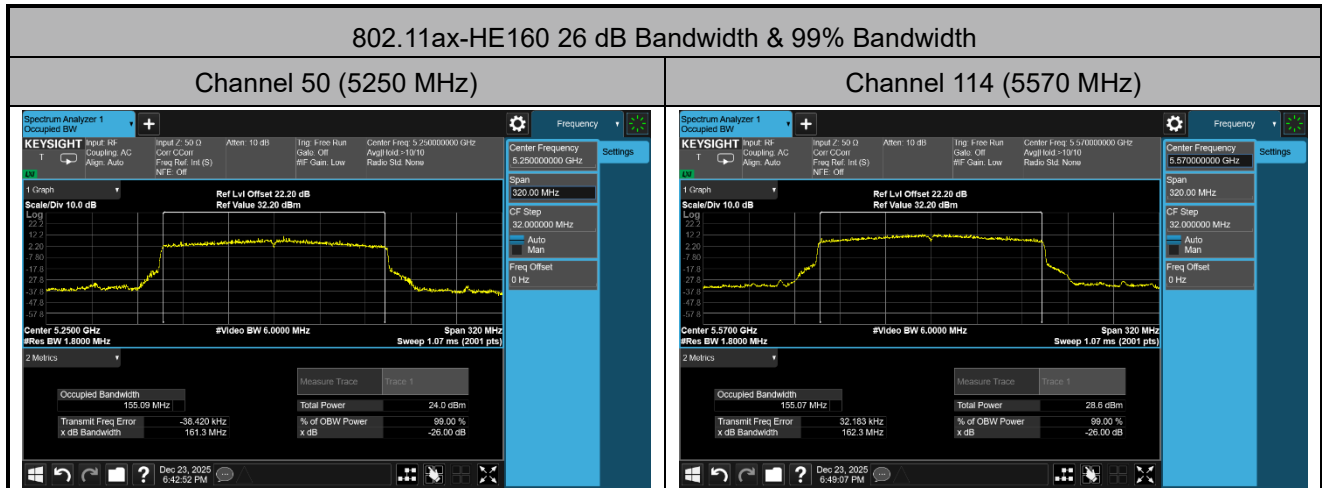

A.3 6 dB Bandwidth Test Result


Test Site	SIP-TR1	Test Engineer	Sean Ouyang
Test Date	2025-12-23 ~ 2026-01-30		

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
11a	6 Mbps	149	5745	15.15	≥0.5
11a	6 Mbps	157	5785	16.29	≥0.5
11a	6 Mbps	165	5825	15.72	≥0.5
11ac-VHT20	MCS0	149	5745	16.29	≥0.5
11ac-VHT20	MCS0	157	5785	15.34	≥0.5
11ac-VHT20	MCS0	165	5825	15.16	≥0.5
11ac-VHT40	MCS0	151	5755	35.10	≥0.5
11ac-VHT40	MCS0	159	5795	35.01	≥0.5
11ac-VHT80	MCS0	155	5775	73.87	≥0.5
11ax-HE20	MCS0	149	5745	18.31	≥0.5
11ax-HE20	MCS0	157	5785	17.66	≥0.5
11ax-HE20	MCS0	165	5825	15.43	≥0.5
11ax-HE40	MCS0	151	5755	31.38	≥0.5
11ax-HE40	MCS0	159	5795	33.77	≥0.5
11ax-HE80	MCS0	155	5775	75.10	≥0.5

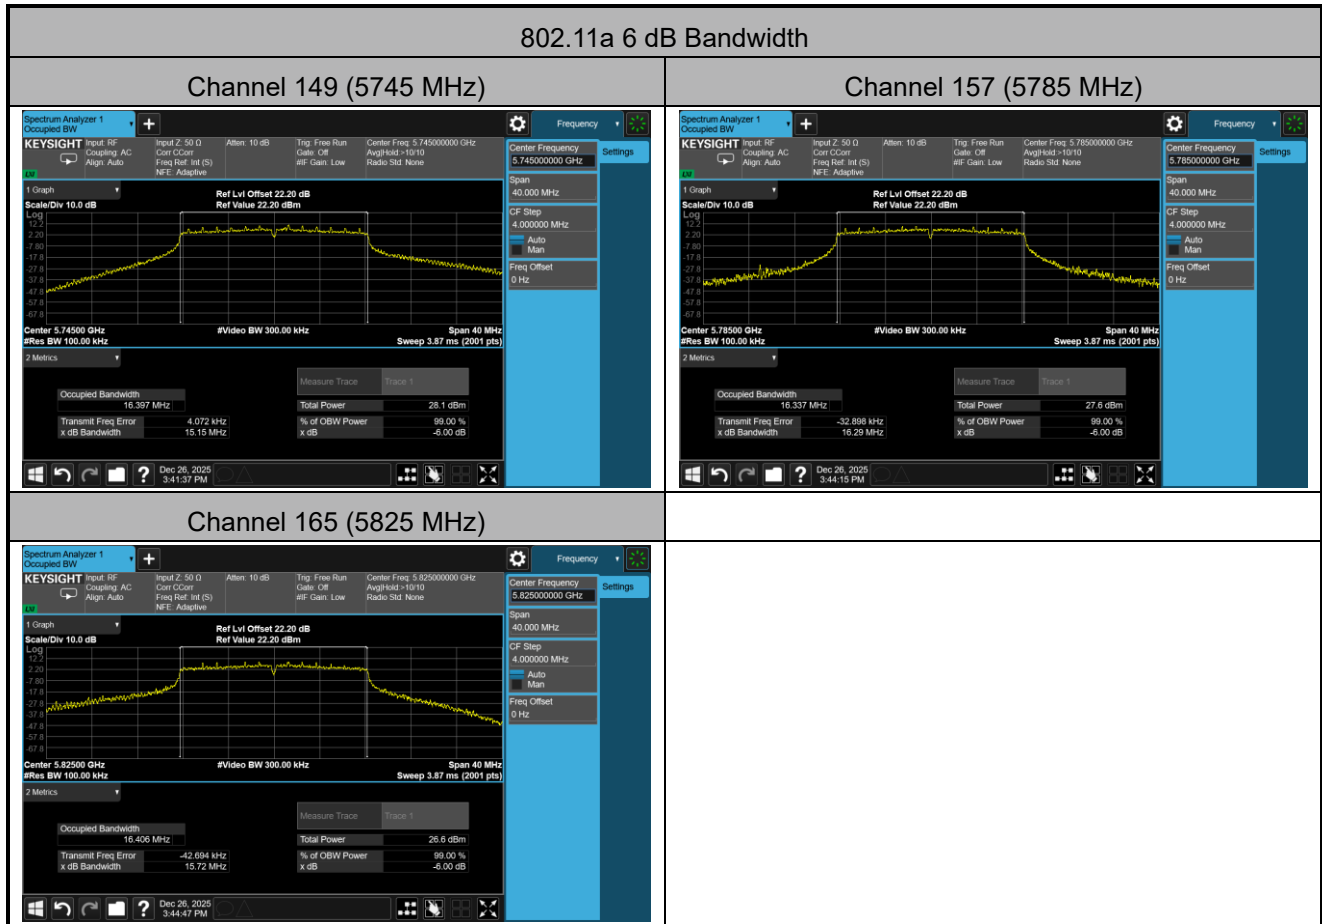


802.11ac-VHT20 6 dB Bandwidth


Channel 149 (5745 MHz)

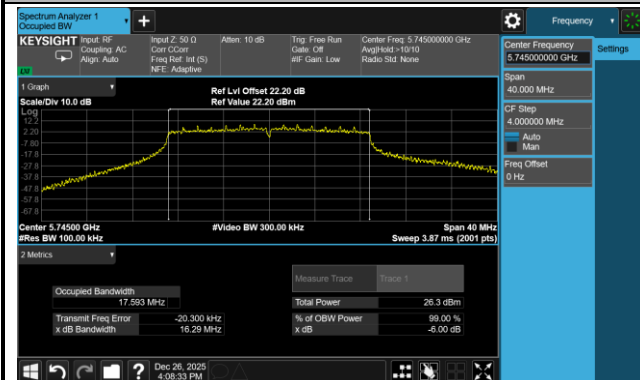

Channel 157 (5785 MHz)

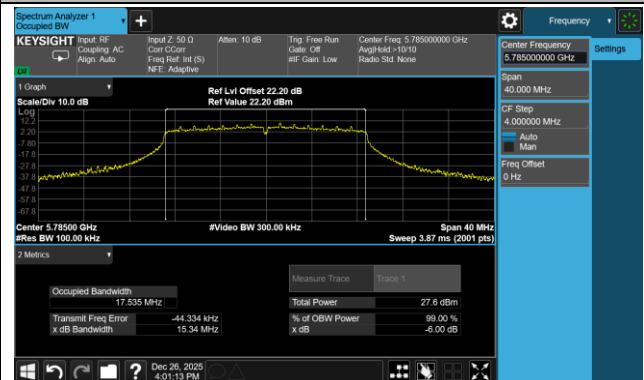


Channel 165 (5825 MHz)

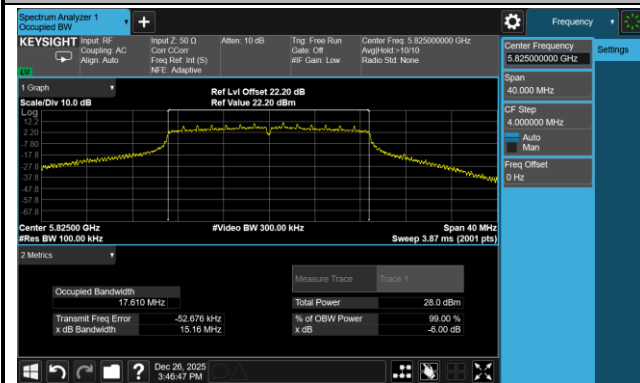



802.11ac-VHT40 6 dB Bandwidth

Channel 151 (5755 MHz)

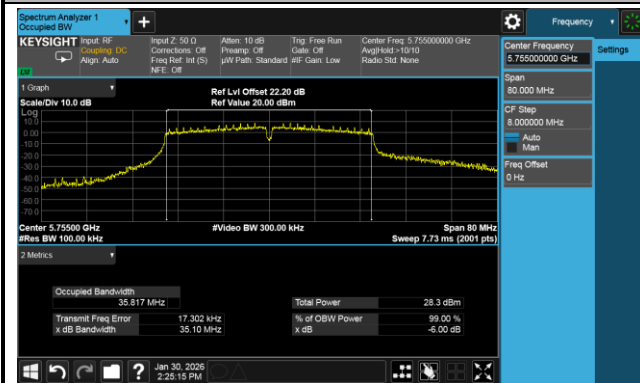


Channel 159 (5795 MHz)

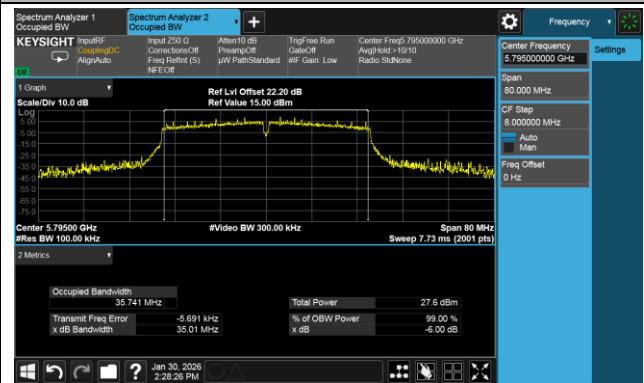

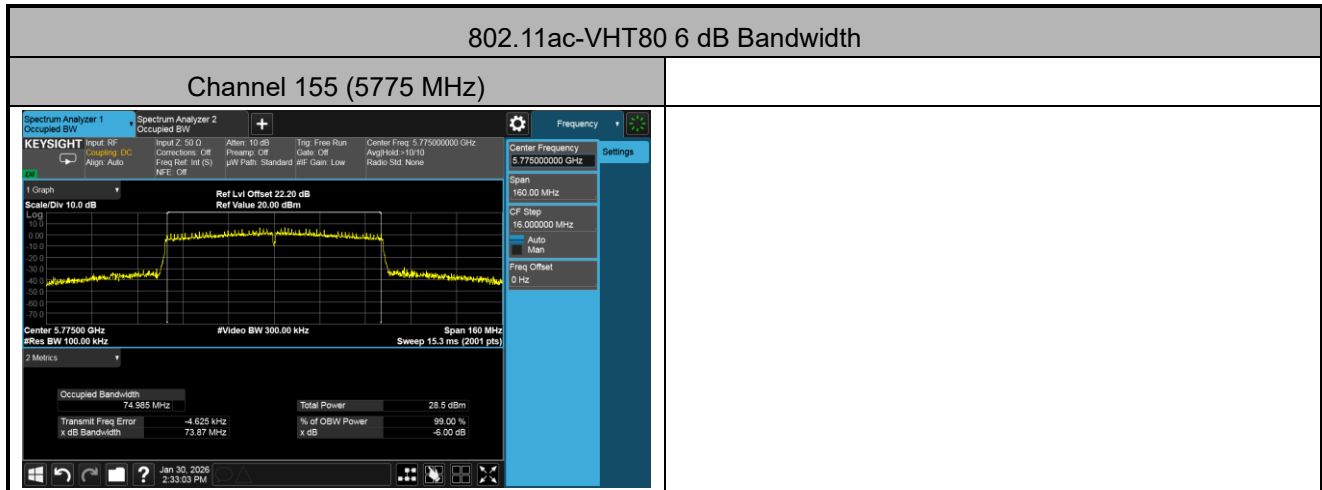


802.11ax-HE20 6 dB Bandwidth


Channel 149 (5745 MHz)

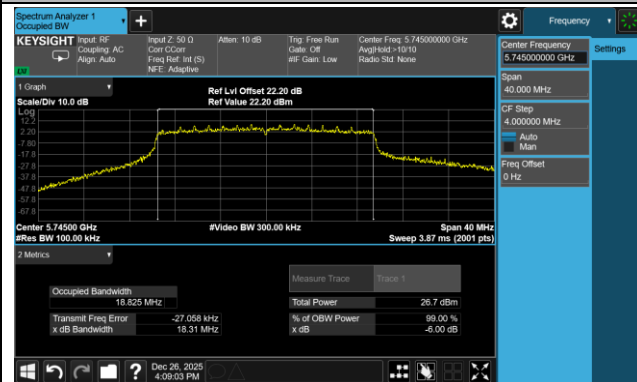

Channel 157 (5785 MHz)

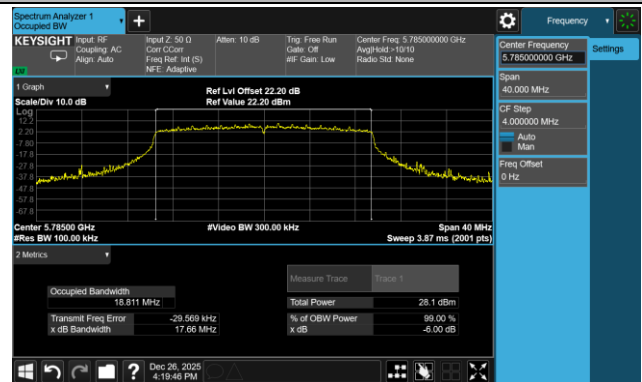


Channel 165 (5825 MHz)

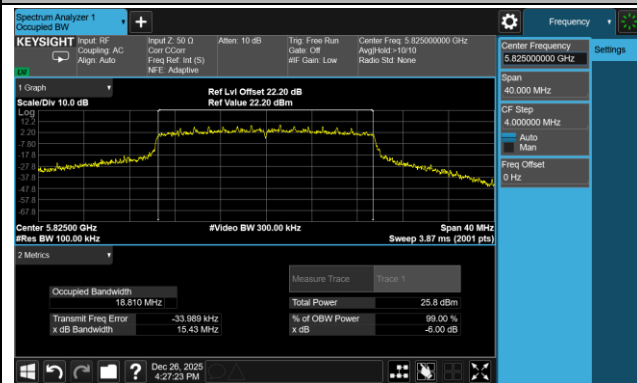



802.11ax-VHT40 6 dB Bandwidth

Channel 151 (5755 MHz)

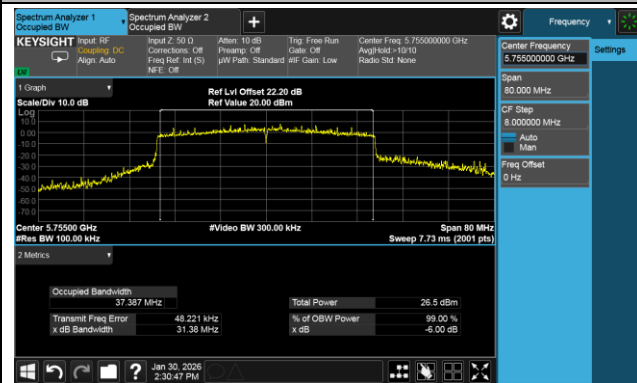

Channel 159 (5795 MHz)

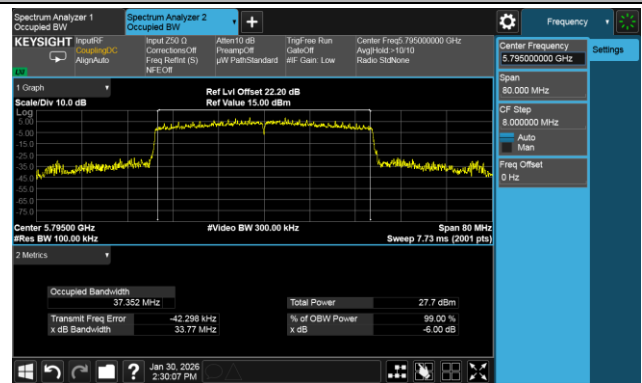

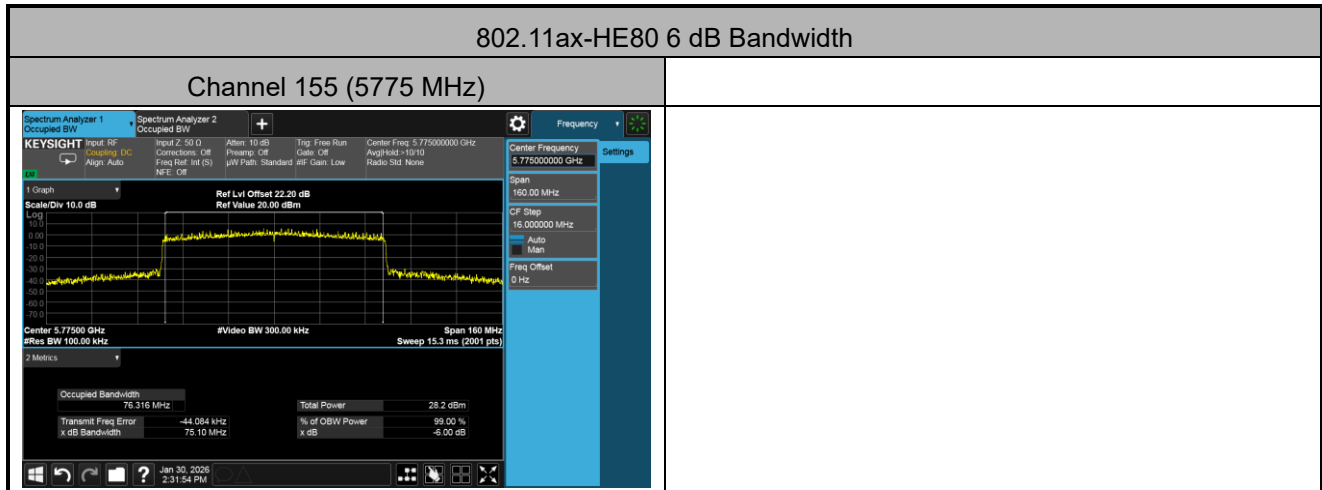

A.4 Output Power Test Result

Test Site	SIP-TR1	Test Engineer	Sean Ouyang
Test Date	2025-12-21	Test Mode	CDD Mode

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Average Power (dBm)			Total Average Power (dBm)	Power Limit (dBm)
				Ant 0	Ant 1	Ant 2		
11a	6 Mbps	36	5180	19.60	19.60	19.85	24.46	≤ 30.00
11a	6 Mbps	44	5220	19.23	19.32	19.60	24.16	≤ 30.00
11a	6 Mbps	48	5240	18.64	18.77	19.08	23.61	≤ 30.00
11a	6 Mbps	52	5260	13.92	14.02	15.02	19.12	≤ 23.98
11a	6 Mbps	60	5300	13.77	13.65	14.91	18.92	≤ 23.98
11a	6 Mbps	64	5320	13.72	13.33	14.93	18.82	≤ 23.98
11a	6 Mbps	100	5500	14.82	13.38	14.99	19.23	≤ 23.98
11a	6 Mbps	116	5580	14.73	13.14	14.66	19.01	≤ 23.98
11a	6 Mbps	140	5700	14.77	13.63	14.81	19.21	≤ 23.98
11a	6 Mbps	144	5720	15.15	14.16	15.13	19.61	≤ 22.80
11a	6 Mbps	149	5745	20.96	20.06	20.31	25.23	≤ 30.00
11a	6 Mbps	157	5785	21.01	20.15	20.56	25.36	≤ 30.00
11a	6 Mbps	165	5825	20.33	19.62	19.32	24.55	≤ 30.00
11ac-VHT20	MCS0	36	5180	19.61	19.62	20.05	24.54	≤ 30.00
11ac-VHT20	MCS0	44	5220	19.71	19.84	20.23	24.70	≤ 30.00
11ac-VHT20	MCS0	48	5240	19.77	19.92	20.31	24.78	≤ 30.00
11ac-VHT20	MCS0	52	5260	14.85	14.36	15.22	19.60	≤ 23.98
11ac-VHT20	MCS0	60	5300	15.31	15.02	16.04	20.25	≤ 23.98
11ac-VHT20	MCS0	64	5320	14.68	14.55	15.53	19.71	≤ 23.98
11ac-VHT20	MCS0	100	5500	15.70	15.61	15.29	20.31	≤ 23.98
11ac-VHT20	MCS0	116	5580	15.76	15.56	15.41	20.35	≤ 23.98
11ac-VHT20	MCS0	140	5700	15.71	15.42	15.34	20.26	≤ 23.98
11ac-VHT20	MCS0	144	5720	15.98	15.46	15.34	20.37	≤ 22.97
11ac-VHT20	MCS0	149	5745	21.03	20.19	20.61	25.39	≤ 30.00
11ac-VHT20	MCS0	157	5785	20.15	19.20	19.34	24.36	≤ 30.00
11ac-VHT20	MCS0	165	5825	20.74	20.10	20.06	25.08	≤ 30.00

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Average Power (dBm)			Total Average Power (dBm)	Power Limit (dBm)
				Ant 0	Ant 1	Ant 2		
11ac-VHT40	MCS0	38	5190	19.34	19.40	18.93	24.00	≤ 30.00
11ac-VHT40	MCS0	46	5230	19.48	19.63	19.01	24.15	≤ 30.00
11ac-VHT40	MCS0	54	5270	17.87	17.33	18.25	22.60	≤ 23.98
11ac-VHT40	MCS0	62	5310	17.35	16.85	17.83	22.13	≤ 23.98
11ac-VHT40	MCS0	102	5510	18.54	18.13	18.09	23.03	≤ 23.98
11ac-VHT40	MCS0	110	5550	18.45	18.11	18.01	22.97	≤ 23.98
11ac-VHT40	MCS0	134	5670	18.82	18.42	17.91	23.17	≤ 23.98
11ac-VHT40	MCS0	142	5710	19.05	18.54	18.42	23.45	≤ 23.98
11ac-VHT40	MCS0	151	5755	21.18	20.20	20.55	25.43	≤ 30.00
11ac-VHT40	MCS0	159	5795	21.54	20.65	21.04	25.86	≤ 30.00
11ac-VHT80	MCS0	42	5210	16.15	16.85	16.23	21.19	≤ 30.00
11ac-VHT80	MCS0	58	5290	18.51	18.54	19.13	23.51	≤ 23.98
11ac-VHT80	MCS0	106	5530	18.96	19.03	19.22	23.84	≤ 23.98
11ac-VHT80	MCS0	122	5610	18.83	18.87	18.83	23.61	≤ 23.98
11ac-VHT80	MCS0	138	5690	19.16	19.21	18.55	23.75	≤ 23.98
11ac-VHT80	MCS0	155	5775	21.54	20.15	20.92	25.68	≤ 30.00
11ac-VHT160	MCS0	50	5250	13.98	14.44	14.74	19.17	≤ 23.98
11ac-VHT160	MCS0	114	5570	17.06	17.41	17.10	21.96	≤ 23.98
11ax-HE20	MCS0	36	5180	17.80	17.60	17.74	22.49	≤ 30.00
11ax-HE20	MCS0	44	5220	17.25	17.92	18.20	22.58	≤ 30.00
11ax-HE20	MCS0	48	5240	17.32	17.88	18.28	22.62	≤ 30.00
11ax-HE20	MCS0	52	5260	14.77	14.67	15.53	19.78	≤ 23.98
11ax-HE20	MCS0	60	5300	14.51	14.36	15.45	19.57	≤ 23.98
11ax-HE20	MCS0	64	5320	14.25	14.39	15.58	19.55	≤ 23.98
11ax-HE20	MCS0	100	5500	15.38	15.61	15.23	20.18	≤ 23.98
11ax-HE20	MCS0	116	5580	15.24	15.26	15.28	20.03	≤ 23.98
11ax-HE20	MCS0	140	5700	15.42	15.30	15.34	20.12	≤ 23.98
11ax-HE20	MCS0	144	5720	15.21	15.21	15.23	19.99	≤ 22.99
11ax-HE20	MCS0	149	5745	19.75	19.02	20.06	24.40	≤ 30.00
11ax-HE20	MCS0	157	5785	19.69	19.10	19.61	24.25	≤ 30.00
11ax-HE20	MCS0	165	5825	19.54	18.95	19.23	24.02	≤ 30.00

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Average Power (dBm)			Total Average Power (dBm)	Power Limit (dBm)
				Ant 0	Ant 1	Ant 2		
11ax-HE40	MCS0	38	5190	18.98	19.24	19.65	24.07	≤ 30.00
11ax-HE40	MCS0	46	5230	18.93	19.47	19.82	24.19	≤ 30.00
11ax-HE40	MCS0	54	5270	17.08	16.99	18.02	22.16	≤ 23.98
11ax-HE40	MCS0	62	5310	16.88	16.89	18.06	22.08	≤ 23.98
11ax-HE40	MCS0	102	5510	17.71	17.88	17.75	22.55	≤ 23.98
11ax-HE40	MCS0	110	5550	17.68	17.68	17.41	22.36	≤ 23.98
11ax-HE40	MCS0	134	5670	17.52	17.55	16.92	22.11	≤ 23.98
11ax-HE40	MCS0	142	5710	17.81	17.66	17.71	22.50	≤ 23.98
11ax-HE40	MCS0	151	5755	21.36	20.65	21.23	25.86	≤ 30.00
11ax-HE40	MCS0	159	5795	21.63	20.68	21.30	25.99	≤ 30.00
11ax-HE80	MCS0	42	5210	17.23	17.53	17.83	22.31	≤ 30.00
11ax-HE80	MCS0	58	5290	18.62	18.74	19.41	23.71	≤ 23.98
11ax-HE80	MCS0	106	5530	18.94	18.77	18.53	23.52	≤ 23.98
11ax-HE80	MCS0	122	5610	19.01	18.79	18.67	23.60	≤ 23.98
11ax-HE80	MCS0	138	5690	19.22	19.13	18.67	23.78	≤ 23.98
11ax-HE80	MCS0	155	5775	21.66	20.34	21.26	25.89	≤ 30.00
11ax-HE160	MCS0	50	5250	15.03	15.34	16.09	20.28	≤ 23.98
11ax-HE160	MCS0	114	5570	17.80	17.14	18.62	22.67	≤ 23.98

Note 1: Total Average Power (dBm) = $10 \times \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)}\}$.

Note 2: For Band-Crossing channel, Average Power Limit = 23.98 dBm or $11 + 10 \times \log_{10} \text{EBW}_{2C}$, which is less.

A.5 Power Spectral Density Test Result

Test Site	SIP-TR1	Test Engineer	Sean Ouyang
Test Date	2025-12-19 ~ 2025-12-25		
Test Item	Power Spectral Density (UNII-1 & UNII-2A & UNII-2C)		

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)			Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/ MHz)
				Ant 0	Ant 1	Ant 2			
11a	6 Mbps	36	5180	9.114	9.217	9.320	95.80	14.175	≤ 14.53
11a	6 Mbps	44	5220	8.277	8.881	8.913	95.80	13.658	≤ 14.53
11a	6 Mbps	48	5240	7.654	8.068	8.442	95.80	13.024	≤ 14.53
11a	6 Mbps	52	5260	2.692	2.872	4.009	95.80	8.189	≤ 8.42
11a	6 Mbps	60	5300	2.426	2.570	3.765	95.80	7.921	≤ 8.42
11a	6 Mbps	64	5320	2.644	2.727	3.873	95.80	8.076	≤ 8.42
11a	6 Mbps	100	5500	3.213	3.627	3.567	95.80	8.430	≤ 8.81
11a	6 Mbps	116	5580	3.216	3.500	3.397	95.80	8.330	≤ 8.81
11a	6 Mbps	140	5700	3.530	3.979	3.427	95.80	8.610	≤ 8.81
11a	6 Mbps	144	5720	3.470	3.879	3.799	95.80	8.677	≤ 8.81
11ac-VHT20	MCS0	36	5180	8.638	8.395	8.707	95.78	13.541	≤ 14.53
11ac-VHT20	MCS0	44	5220	8.139	8.714	8.803	95.78	13.520	≤ 14.53
11ac-VHT20	MCS0	48	5240	8.354	8.659	8.966	95.78	13.625	≤ 14.53
11ac-VHT20	MCS0	52	5260	3.455	2.604	3.649	95.78	8.218	≤ 8.42
11ac-VHT20	MCS0	60	5300	2.715	3.005	4.201	95.78	8.314	≤ 8.42
11ac-VHT20	MCS0	64	5320	2.554	2.502	3.967	95.78	8.021	≤ 8.42
11ac-VHT20	MCS0	100	5500	3.149	3.657	3.418	95.78	8.371	≤ 8.81
11ac-VHT20	MCS0	116	5580	3.776	3.726	3.877	95.78	8.752	≤ 8.81
11ac-VHT20	MCS0	140	5700	3.634	3.616	3.828	95.78	8.652	≤ 8.81
11ac-VHT20	MCS0	144	5720	3.743	3.824	3.677	95.78	8.707	≤ 8.81
11ac-VHT40	MCS0	38	5190	5.670	5.756	6.115	91.87	10.991	≤ 14.53
11ac-VHT40	MCS0	46	5230	5.629	6.117	6.258	91.87	11.149	≤ 14.53
11ac-VHT40	MCS0	54	5270	3.181	2.799	3.641	91.87	8.360	≤ 8.42
11ac-VHT40	MCS0	62	5310	2.358	2.468	3.705	91.87	8.027	≤ 8.42
11ac-VHT40	MCS0	102	5510	3.230	3.393	3.234	91.87	8.426	≤ 8.81
11ac-VHT40	MCS0	110	5550	3.115	3.198	3.495	91.87	8.412	≤ 8.81
11ac-VHT40	MCS0	134	5670	3.437	3.639	2.655	91.87	8.403	≤ 8.81
11ac-VHT40	MCS0	142	5710	3.516	3.599	3.404	91.87	8.647	≤ 8.81

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)			Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/ MHz)
				Ant 0	Ant 1	Ant 2			
11ac-VHT80	MCS0	42	5210	-0.940	-1.146	-0.717	84.66	4.564	≤ 14.53
11ac-VHT80	MCS0	58	5290	0.499	-0.011	1.892	84.66	6.364	≤ 8.42
11ac-VHT80	MCS0	106	5530	2.054	2.256	2.024	84.66	7.607	≤ 8.81
11ac-VHT80	MCS0	122	5610	2.132	2.068	2.067	84.66	7.584	≤ 8.81
11ac-VHT80	MCS0	138	5690	2.583	2.278	1.809	84.66	7.729	≤ 8.81
11ac-VHT160	MCS0	50	5250	-6.056	-5.213	-4.474	76.30	0.746	≤ 8.42
11ac-VHT160	MCS0	114	5570	-2.474	-2.897	-2.921	76.30	3.187	≤ 8.81
11ax-HE20	MCS0	36	5180	6.064	6.658	6.835	84.45	12.037	≤ 14.53
11ax-HE20	MCS0	44	5220	5.625	5.991	6.526	84.45	11.568	≤ 14.53
11ax-HE20	MCS0	48	5240	5.431	6.006	6.543	84.45	11.522	≤ 14.53
11ax-HE20	MCS0	52	5260	2.235	2.434	3.075	84.45	8.102	≤ 8.42
11ax-HE20	MCS0	60	5300	2.057	2.124	3.687	84.45	8.196	≤ 8.42
11ax-HE20	MCS0	64	5320	2.058	2.200	3.681	84.45	8.216	≤ 8.42
11ax-HE20	MCS0	100	5500	2.858	3.209	3.010	84.45	8.533	≤ 8.81
11ax-HE20	MCS0	116	5580	3.021	3.120	3.184	84.45	8.614	≤ 8.81
11ax-HE20	MCS0	140	5700	3.167	3.401	3.095	84.45	8.728	≤ 8.81
11ax-HE20	MCS0	144	5720	3.306	3.266	3.054	84.45	8.715	≤ 8.81
11ax-HE40	MCS0	38	5190	4.620	4.776	5.441	84.38	10.469	≤ 14.53
11ax-HE40	MCS0	46	5230	5.029	5.308	5.914	84.38	10.942	≤ 14.53
11ax-HE40	MCS0	54	5270	2.088	2.057	3.312	84.38	8.035	≤ 8.42
11ax-HE40	MCS0	62	5310	2.131	2.225	3.132	84.38	8.029	≤ 8.42
11ax-HE40	MCS0	102	5510	2.779	3.132	3.262	84.38	8.571	≤ 8.81
11ax-HE40	MCS0	110	5550	3.141	2.981	3.237	84.38	8.630	≤ 8.81
11ax-HE40	MCS0	134	5670	3.078	2.948	3.000	84.38	8.518	≤ 8.81
11ax-HE40	MCS0	142	5710	3.298	3.087	3.372	84.38	8.763	≤ 8.81
11ax-HE80	MCS0	42	5210	-1.159	-0.454	0.633	83.71	5.280	≤ 14.53
11ax-HE80	MCS0	58	5290	1.613	0.869	2.492	83.71	7.252	≤ 8.42
11ax-HE80	MCS0	106	5530	1.693	2.133	2.170	83.71	7.547	≤ 8.81
11ax-HE80	MCS0	122	5610	2.554	2.568	2.056	83.71	7.943	≤ 8.81
11ax-HE80	MCS0	138	5690	2.423	2.380	2.287	83.71	7.907	≤ 8.81
11ax-HE160	MCS0	50	5250	-3.914	-3.672	-3.281	83.88	1.920	≤ 8.42
11ax-HE160	MCS0	114	5570	-1.654	-1.862	-1.817	83.88	3.758	≤ 8.81

Note 1:

Duty Cycle < 98%, Total PSD (dBm/MHz) = $10 \times \log \{10^{(\text{Ant 0 AVPSD}/10)} + 10^{(\text{Ant 1 AVPSD}/10)} + 10^{(\text{Ant 2 AVPSD}/10)}\} + 10 \times \log (1/\text{Duty cycle});$

Duty Cycle $\geq$ 98%, Total PSD (dBm/MHz) = $10 \times \log \{10^{(\text{Ant 0 AVPSD}/10)} + 10^{(\text{Ant 1 AVPSD}/10)} + 10^{(\text{Ant 2 AVPSD}/10)}\}.$

Note 2:

For 5125 - 5250 MHz Band: PSD Limit (dBm/MHz) = 17 - (8.47 - 6) = 14.53 dBm/MHz

For 5250 - 5350 MHz Band: PSD Limit (dBm/MHz) = 11 - (8.58 - 6) = 8.42 dBm/MHz.

For 5470 - 5725 MHz Band: PSD Limit (dBm/MHz) = 11 - (8.19 - 6) = 8.81 dBm/MHz.

Test Site	SIP-TR1	Test Engineer	Sean Ouyang
Test Date	2025-12-19 ~ 2025-12-25		
Test Item	Power Spectral Density (UNII-Band 3)		

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/510 kHz)			Duty Cycle (%)	Total PSD (dBm/ 510 kHz)	PSD Limit (dBm/ 500 kHz)
				Ant 0	Ant 1	Ant 2			
11a	6 Mbps	149	5745	7.049	6.072	6.606	95.80	11.552	≤ 28.38
11a	6 Mbps	157	5785	7.387	6.174	6.627	95.80	11.716	≤ 28.38
11a	6 Mbps	165	5825	6.347	5.687	5.517	95.80	10.823	≤ 28.38
11ac-VHT20	MCS0	149	5745	6.919	6.069	6.482	95.78	11.462	≤ 28.38
11ac-VHT20	MCS0	157	5785	5.788	5.060	5.500	95.78	10.418	≤ 28.38
11ac-VHT20	MCS0	165	5825	6.643	5.705	5.801	95.78	11.029	≤ 28.38
11ac-VHT40	MCS0	151	5755	4.626	3.632	4.114	91.87	9.282	≤ 28.38
11ac-VHT40	MCS0	159	5795	5.478	4.111	4.781	91.87	9.965	≤ 28.38
11ac-VHT80	MCS0	155	5775	2.123	1.188	2.042	84.66	7.299	≤ 28.38
11ax-HE20	MCS0	149	5745	5.918	5.420	5.652	84.45	11.173	≤ 28.38
11ax-HE20	MCS0	157	5785	5.648	4.697	5.088	84.45	10.667	≤ 28.38
11ax-HE20	MCS0	165	5825	5.472	4.830	4.691	84.45	10.516	≤ 28.38
11ax-HE40	MCS0	151	5755	4.463	3.440	3.890	84.38	9.460	≤ 28.38
11ax-HE40	MCS0	159	5795	4.612	3.646	3.742	84.38	9.531	≤ 28.38
11ax-HE80	MCS0	155	5775	2.279	1.252	1.828	83.71	7.350	≤ 28.38

Note 1:

Duty Cycle < 98%, Total PSD (dBm/510 kHz) = $10 \times \log \{10^{(\text{Ant 0 AVPSD}/10)} + 10^{(\text{Ant 1 AVPSD}/10)} + 10^{(\text{Ant 2 AVPSD}/10)}\} + 10 \times \log (1/\text{Duty cycle});$


Duty Cycle ≥ 98%, Total PSD (dBm/510 kHz) = $10 \times \log \{10^{(\text{Ant 0 AVPSD}/10)} + 10^{(\text{Ant 1 AVPSD}/10)} + 10^{(\text{Ant 2 AVPSD}/10)}\}.$

Note 2:


PSD Limit (dBm/500 kHz) = 30 - (7.62 - 6) = 28.38 dBm/500 kHz.

802.11a Power Spectral Density - Ant 0


Channel 36 (5180 MHz)

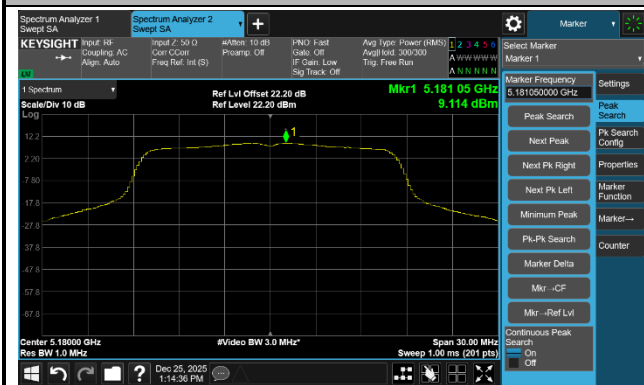


Channel 44 (5220 MHz)

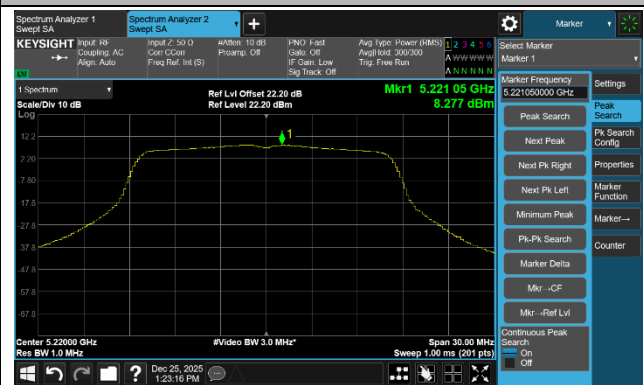

Channel 48 (5240 MHz)

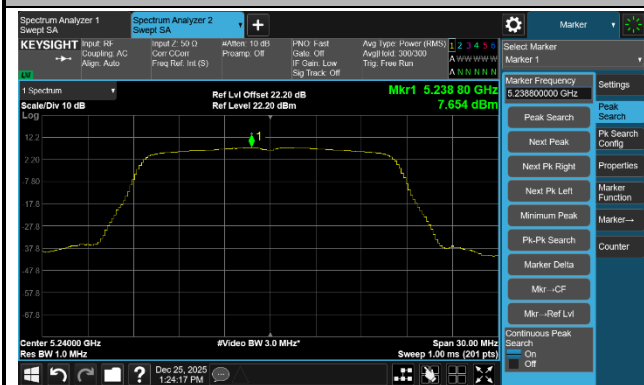

Channel 52 (5260 MHz)

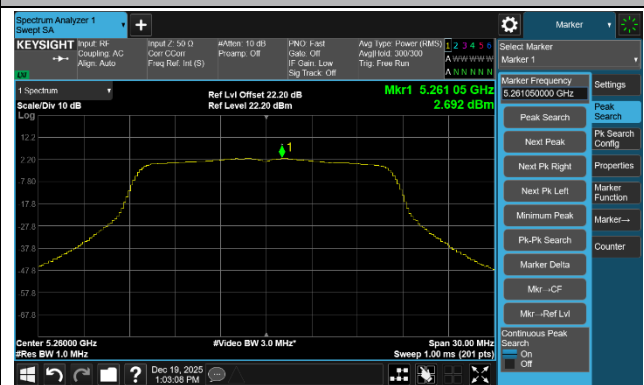

Channel 60 (5300 MHz)



Channel 64 (5320 MHz)



802.11a Power Spectral Density - Ant 0


Channel 100 (5500 MHz)



Channel 116 (5580 MHz)




Channel 140 (5700 MHz)

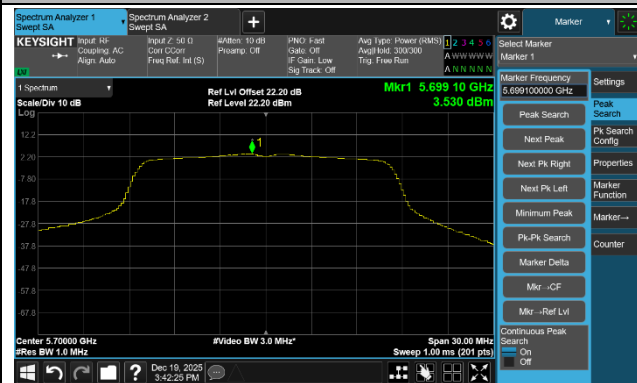


Channel 144(5720 MHz)




Channel 149 (5745 MHz)

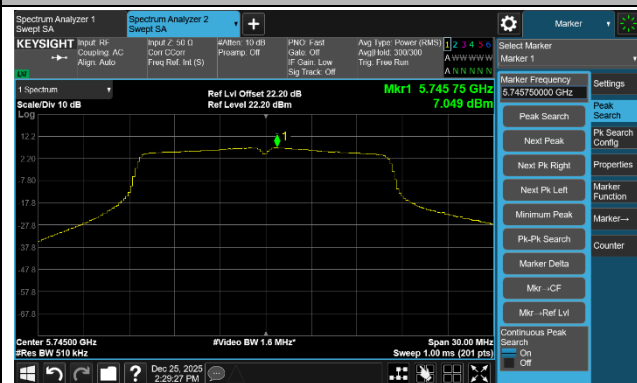


Channel 157 (5785 MHz)

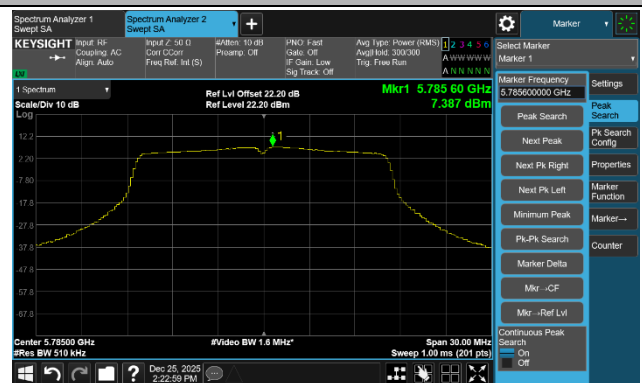

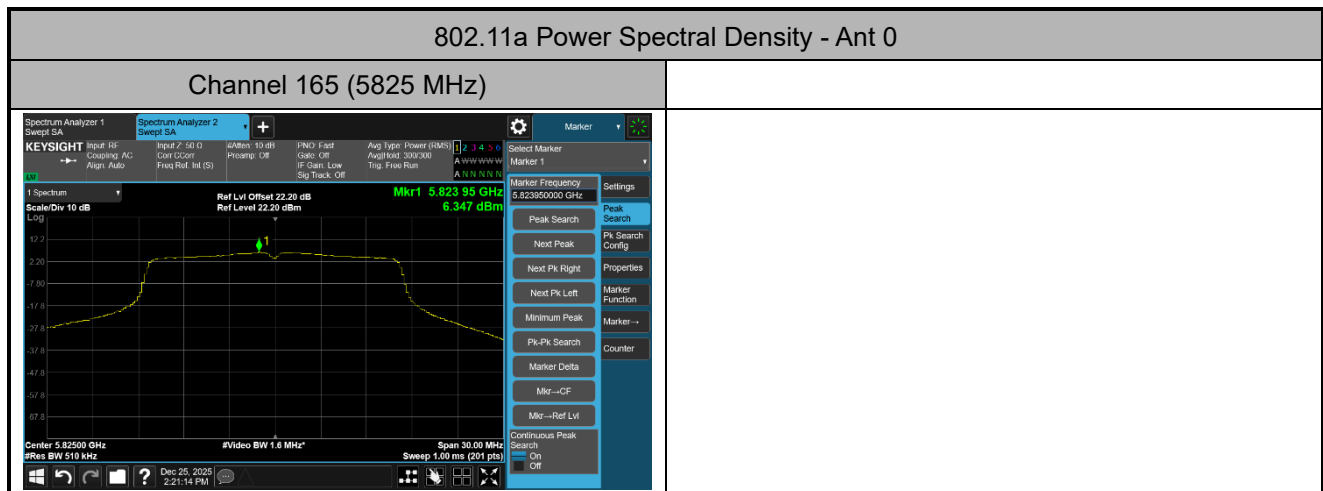


802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 36 (5180 MHz)

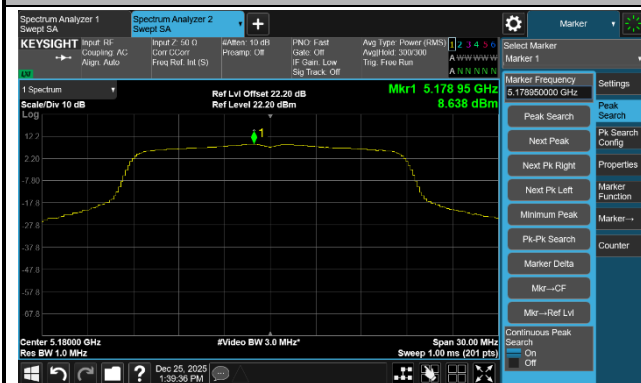

Channel 44 (5220 MHz)

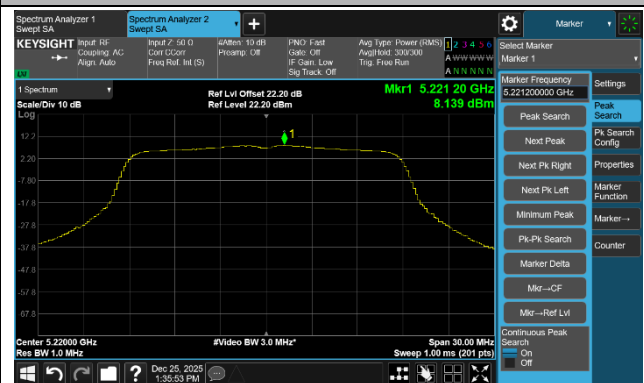


Channel 48 (5240 MHz)

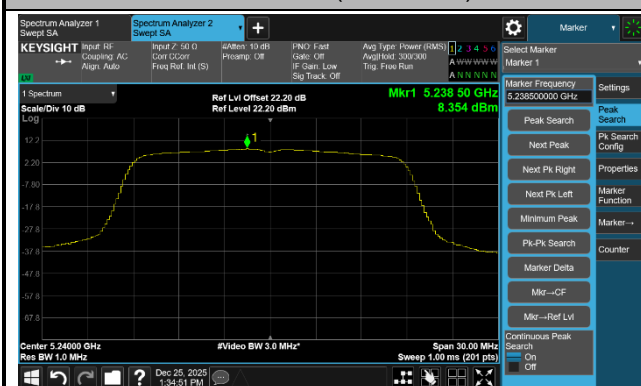


Channel 52 (5260 MHz)



Channel 60 (5300 MHz)

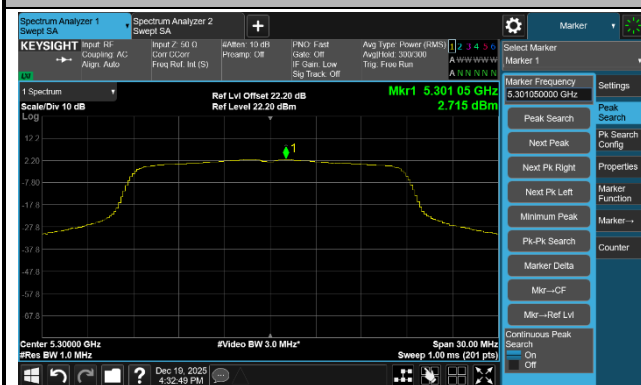


Channel 64 (5320 MHz)

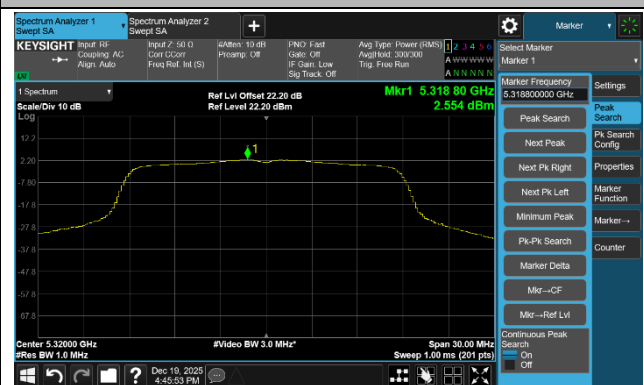


802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 100 (5500 MHz)

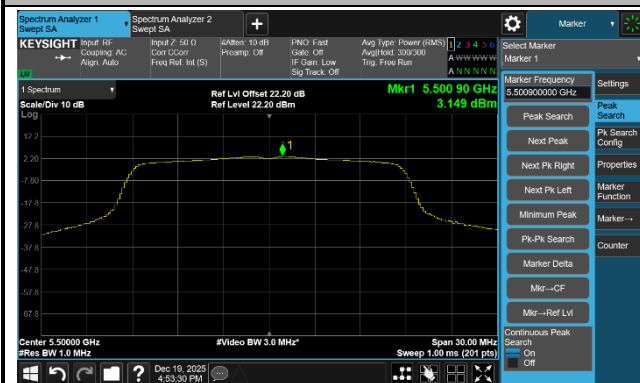

Channel 116 (5580 MHz)

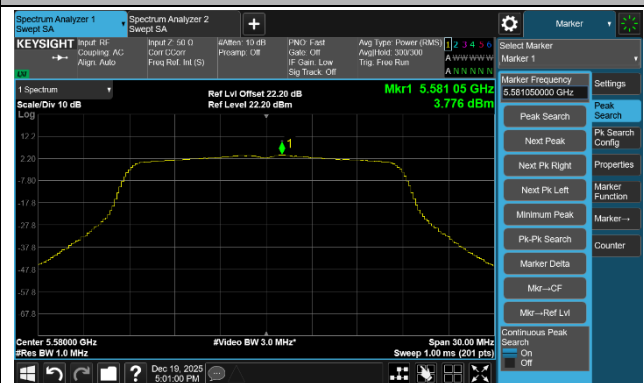


Channel 140 (5700 MHz)

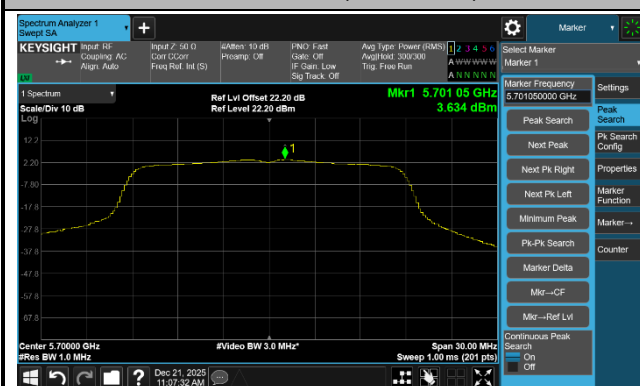


Channel 144(5720 MHz)




Channel 149 (5745 MHz)

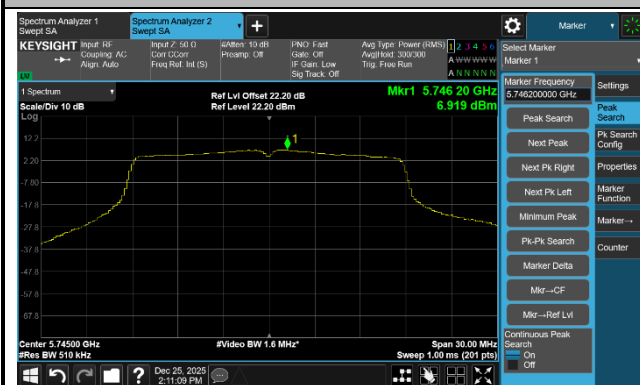


Channel 157 (5785 MHz)

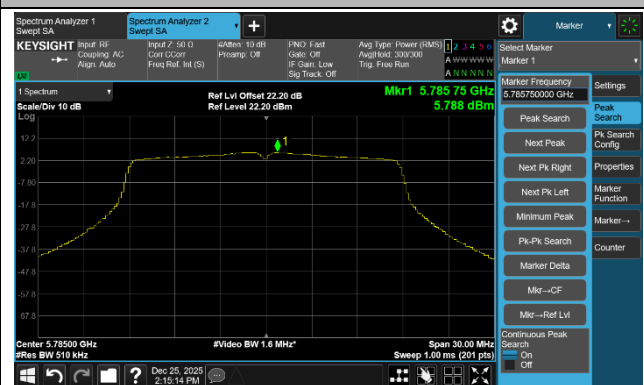

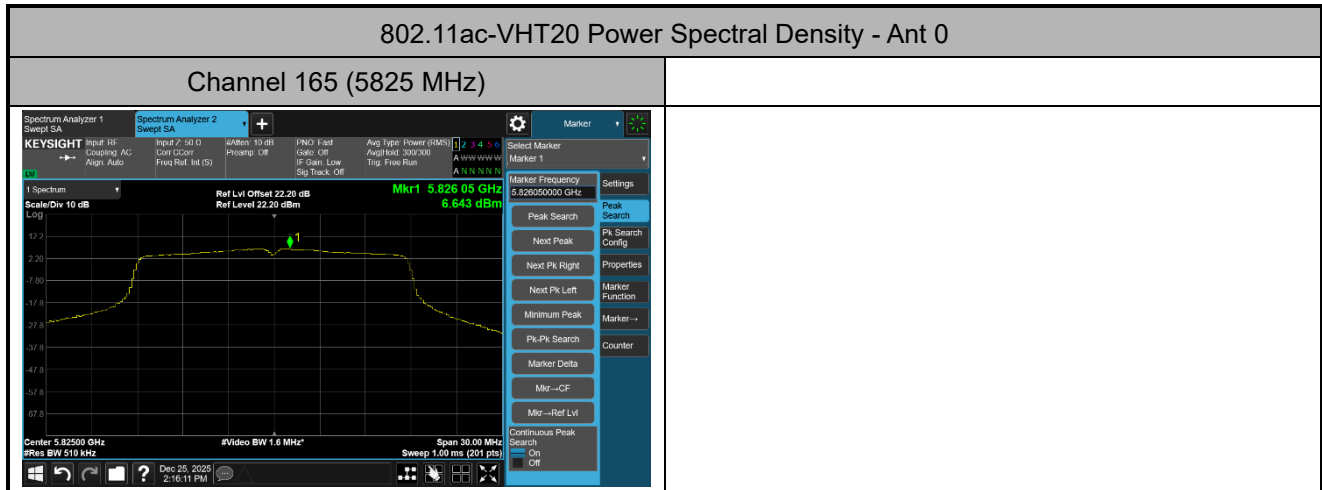


802.11ac-VHT40 Power Spectral Density - Ant 0


Channel 38 (5190 MHz)

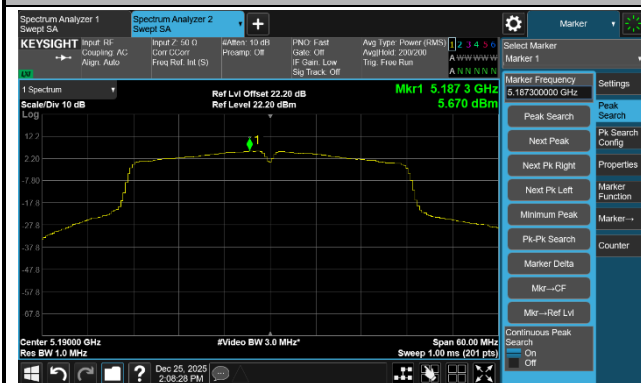

Channel 46 (5230 MHz)

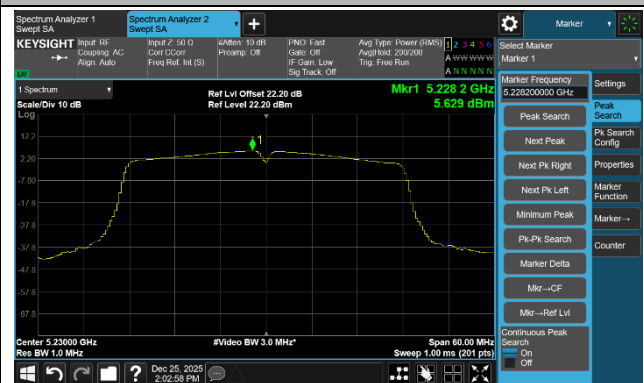

Channel 54 (5270 MHz)

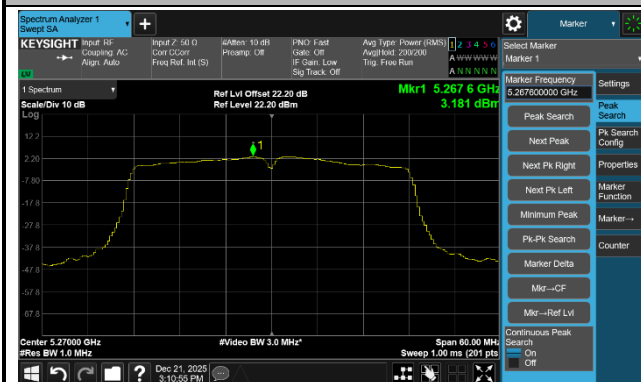

Channel 62 (5310 MHz)



Channel 102 (5510 MHz)



Channel 110 (5550 MHz)



802.11ac-VHT40 Power Spectral Density - Ant 0


Channel 134 (5670 MHz)



Channel 142(5710 MHz)



Channel 151 (5755 MHz)

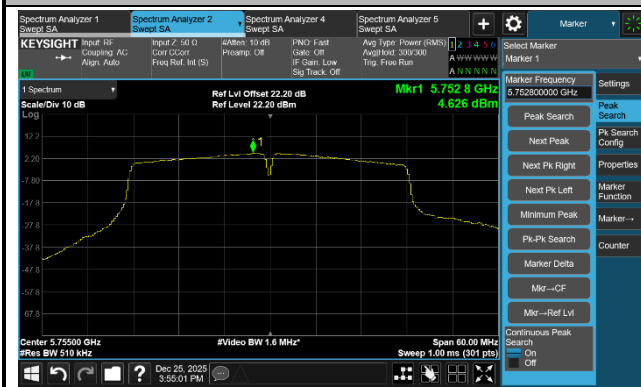

Channel 159 (5795 MHz)

