



FCC Radio Test Report


FCC ID: 2BH7FEAP727

This report concerns: Original Grant

Project No. : 2511C431
Equipment : BE5000 Ceiling Mount Wi-Fi 7 Access Point
Brand Name : Omada
Model Name : EAP727
Applicant : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618
Manufacturer : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618
Date of Receipt : Nov. 24, 2025
Date of Test : Nov. 24, 2025 ~ Jan. 06, 2026
Issued Date : Mar. 26, 2026
Test Sample : Engineering Sample No.: DG920251124513 for Radiated and AC Power Line Conducted, DG920251124512 for others.
Standard(s) : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by : 
 Sheldon Ou

Approved by : 
 Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.
 Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	12
3.3 PARAMETERS OF TEST SOFTWARE	14
3.4 DUTY CYCLE	15
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	17
3.6 SUPPORT UNITS	17
3.7 CUSTOMER INFORMATION DESCRIPTION	17
4 . AC POWER LINE CONDUCTED EMISSIONS	18
4.1 LIMIT	18
4.2 TEST PROCEDURE	18
4.3 DEVIATION FROM TEST STANDARD	18
4.4 TEST SETUP	19
4.5 EUT OPERATION CONDITIONS	19
4.6 TEST RESULTS	19
5 . RADIATED EMISSIONS	20
5.1 LIMIT	20
5.2 TEST PROCEDURE	21
5.3 DEVIATION FROM TEST STANDARD	22
5.4 TEST SETUP	22
5.5 EUT OPERATION CONDITIONS	24
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	24
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	24
5.8 TEST RESULTS - ABOVE 1000 MHZ	24
6 . BANDWIDTH	25
6.1 LIMIT	25

Table of Contents	Page
6.2 TEST PROCEDURE	25
6.3 DEVIATION FROM STANDARD	25
6.4 TEST SETUP	25
6.5 EUT OPERATION CONDITIONS	25
6.6 TEST RESULTS	25
7 . MAXIMUM OUTPUT POWER	26
7.1 LIMIT	26
7.2 TEST PROCEDURE	26
7.3 DEVIATION FROM STANDARD	26
7.4 TEST SETUP	26
7.5 EUT OPERATION CONDITIONS	26
7.6 TEST RESULTS	26
8 . CONDUCTED SPURIOUS EMISSIONS	27
8.1 LIMIT	27
8.2 TEST PROCEDURE	27
8.3 DEVIATION FROM STANDARD	28
8.4 TEST SETUP	28
8.5 EUT OPERATION CONDITIONS	28
8.6 TEST RESULTS	28
9 . POWER SPECTRAL DENSITY	29
9.1 LIMIT	29
9.2 TEST PROCEDURE	29
9.3 DEVIATION FROM STANDARD	29
9.4 TEST SETUP	29
9.5 EUT OPERATION CONDITIONS	29
9.6 TEST RESULTS	29
10 . MEASUREMENT INSTRUMENTS LIST	30
11 . EUT TEST PHOTO	32
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	38
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	41
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	46
APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ	49

Table of Contents

Page

APPENDIX E - BANDWIDTH	112
FAPPENDIX F - MAXIMUM OUTPUT POWER	119
APPENDIX G - CONDUCTED SPURIOUS EMISSIONS	126
APPENDIX H - POWER SPECTRAL DENSITY	139

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-2-2511C431	R00	Original Report.	Mar. 26, 2026	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standard:

ANSI C63.10-2020

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emissions	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

(1) "N/A" denotes test is not applicable in this test report.

(2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions Measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)
DGDLC02	CISPR	150kHz ~ 30MHz	2.66

B. Radiated emissions Measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)
DGDLCB03	CISPR	9kHz ~ 30MHz	2.26

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DGDLCB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U,(dB)
DGDLCB03 (3m)	CISPR	1GHz ~ 6GHz	4.16
		6GHz ~ 18GHz	4.74

Test Site	Method	Measurement Frequency Range	U,(dB)
DGDLCB03 (1m)	CISPR	18 ~ 26.5 GHz	4.30

C. Other Measurement:

Test Item	Uncertainty
Bandwidth	0.75 %
Maximum Output Power	1.3 dB
Conducted Spurious Emission	2.1 dB
Conducted Bandedge Emission	1.7 dB
Power Spectral Density	1.8 dB
Temperature	0.7 °C
Humidity	1.7 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	24°C	53%	AC 120V/60Hz	Hayden Chen
Radiated Emissions -9kHz to 30 MHz	20°C	50%	AC 120V/60Hz	Hayden Chen
Radiated Emissions -30MHz to 1000MHz	23°C	46%	AC 120V/60Hz	Calvin Wen
Radiated Emissions -Above 1000MHz	22-23°C	42-46%	AC 120V/60Hz	Calvin Wen Torin Long
Bandwidth	24°C	46%	AC 120V/60Hz	Alex Yin
Maximum Output Power	23-24°C	45-47%	AC 120V/60Hz	Arvin Tong
Conducted Spurious Emissions	24°C	46%	AC 120V/60Hz	Alex Yin
Power Spectral Density	24°C	46%	AC 120V/60Hz	Alex Yin

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	BE5000 Ceiling Mount Wi-Fi 7 Access Point
Brand Name	Omada
Test Model	EAP727
Model Name	EAP727
Model Difference(s)	N/A
Hardware Version	1.0
Software Version	1.0
Power Source	DC Voltage supplied from AC adapter (support unit) or PoE adapter (support unit).
Power Rating	12V --- 1.5A 802.3at PoE: 42.5-57V --- 0.6A
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Type	IEEE 802.11b: DSSS IEEE 802.11g/n: OFDM IEEE 802.11ax/be: OFDMA
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ax: up to 573.6 Mbps IEEE 802.11be: up to 688 Mbps
Maximum Output Power	IEEE 802.11g: 29.67 dBm (0.9268 W)

Note:

- The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

2. Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n(HT20), IEEE 802.11ax(HE20), IEEE 802.11be(EHT20)							
CH03 - CH09 for IEEE 802.11n(HT40), IEEE 802.11ax(HE40), IEEE 802.11be(EHT40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	 tp-link	EAP727	Dipole	ipex	3.38
2	 tp-link	EAP727	Dipole	ipex	3

Note:

- This EUT supports CDD, all antenna gains are not equal, Directional gain = $G_{ANT} + \text{Array Gain}$. For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the Directional gain=3.38. For power spectral density measurements, Directional gain= $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N]$ dBi, that is Directional gain(each angle)= $10\log[(10^{2.71/20} + 10^{2.79/20})^2 / 2]$ dBi =5.76.
- Beamforming Gain is 3dB.

4. Table for Antenna Configuration:

Operating Mode	TX Mode	2TX
	IEEE 802.11b	V(Ant. 1 + Ant. 2)
	IEEE 802.11g	V(Ant. 1 + Ant. 2)
	IEEE 802.11n(HT20)	V(Ant. 1 + Ant. 2)
	IEEE 802.11n(HT40)	V(Ant. 1 + Ant. 2)
	IEEE 802.11ax(HE20)	V(Ant. 1 + Ant. 2)
	IEEE 802.11ax(HE40)	V(Ant. 1 + Ant. 2)
	IEEE 802.11be(EHT20)	V(Ant. 1 + Ant. 2)
	IEEE 802.11be(EHT40)	V(Ant. 1 + Ant. 2)

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N(HT20) Mode Channel 01/06/11
Mode 4	TX N(HT40) Mode Channel 03/06/09
Mode 5	TX BE(EHT20) Mode Channel 01/06/11
Mode 6	TX BE(EHT40) Mode Channel 03/06/09
Mode 7	TX G Mode Channel 06
Mode 8	TX B Mode Channel 01/02/06/10/11
Mode 9	TX G Mode Channel 01/02/06/10/11
Mode 10	TX N(HT20) Mode Channel 01/02/06/10/11
Mode 11	TX N(HT40) Mode Channel 03/04/06/08/09
Mode 12	TX BE(EHT20) Mode Channel 01/02/06/10/11
Mode 13	TX BE(EHT40) Mode Channel 03/04/06/08/09

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 7	TX G Mode Channel 06

Radiated emissions test - Below 1GHz & Above 18 GHz	
Final Test Mode	Description
Mode 7	TX G Mode Channel 06

Radiated emissions test - 1 GHz - 18 GHz	
Mode 8	TX B Mode Channel 01/02/06/10/11
Mode 9	TX G Mode Channel 01/02/06/10/11
Mode 10	TX N(HT20) Mode Channel 01/02/06/10/11
Mode 11	TX N(HT40) Mode Channel 03/04/06/08/09
Mode 12	TX BE(EHT20) Mode Channel 01/02/06/10/11
Mode 13	TX BE(EHT40) Mode Channel 03/04/06/08/09

Conducted test	
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N(HT20) Mode Channel 01/06/11
Mode 4	TX N(HT40) Mode Channel 03/06/09
Mode 5	TX BE(EHT20) Mode Channel 01/06/11
Mode 6	TX BE(EHT40) Mode Channel 03/06/09

NOTE:


- (1) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (2) For AC power line conducted emissions and radiated emission below 1 GHz test, the IEEE 802.11g Mode Channel 06 is found to be the worst case and recorded.
- (3) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (4) For radiated emission Harmonic 18-26.5GHz test, only tested the worst case and recorded.
- (5) For Beamforming operation, the manufacturer automatically reduces power based on a factor calculated as the difference between the beamforming directional gain and the CDD directional power gain. Thus, only the CDD mode was evaluated in this report.
- (6) IEEE 802.11ax mode and IEEE 802.11be mode only support full RU, so only the full RU is evaluated and measured inside report.
- (7) For AC power line conducted emissions and radiated emissions below 1 GHz test, PoE Supply and Adapter Supply are evaluated, the worst case is Adapter Supply and recorded.
- (8) For radiated emission 1 GHz - 18GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is Horizontal for Band edge, Vertical for Harmonic. In this report only recorded the worst case.
- (9) EHT20/EHT40 covers HE20/HE40, due to same modulation (in full RU). The power setting for 802.11ax HE20/HE40 are the same or lower than 802.11be EHT20/EHT40.

3.3 PARAMETERS OF TEST SOFTWARE

Test Software Version	QATool_20240327		
Frequency (MHz)	2412	2437	2462
IEEE 802.11b	27.5	27.5	27.5
IEEE 802.11g	25.5	28	25.5
IEEE 802.11n(HT20)	24.5	28	25.5
IEEE 802.11be(EHT20)	24.5	28	25
Frequency (MHz)	2422	2437	2452
IEEE 802.11n(HT40)	22.5	26	23
IEEE 802.11be(EHT40)	22	25.5	22.5


3.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
If duty cycle is $< 98\%$, duty factor shall be considered.
The output power = measured power + duty factor.

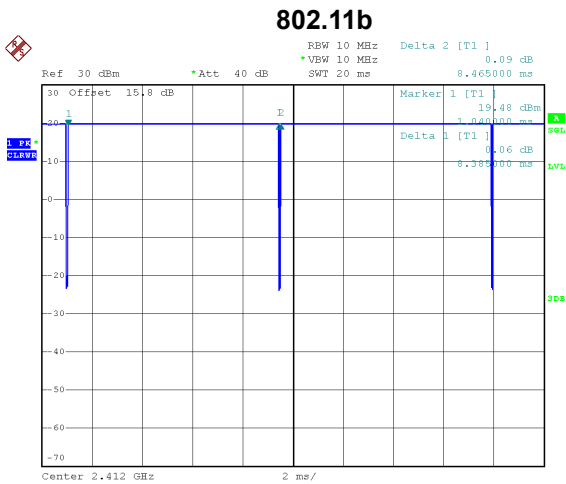


Date: 28.NOV.2025 09:59:25

Duty cycle = $8.385 \text{ ms} / 8.465 \text{ ms} = 99.05\%$
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00 \text{ dB}$

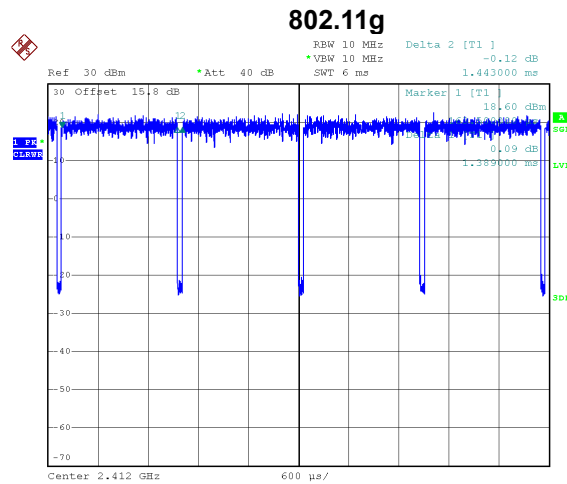


Date: 28.NOV.2025 10:00:14

Duty cycle = $1.389 \text{ ms} / 1.443 \text{ ms} = 96.26\%$
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.17 \text{ dB}$

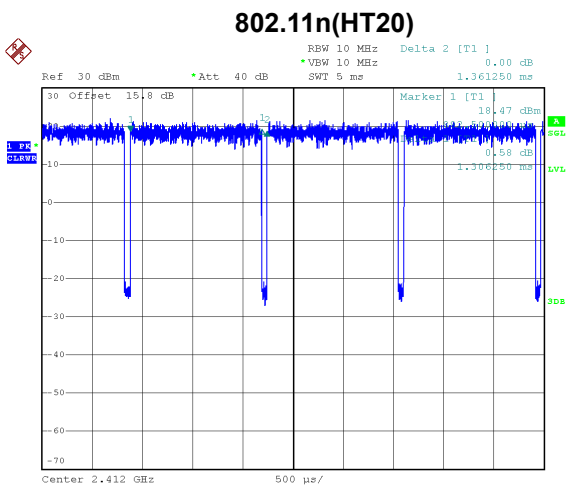


Date: 28.NOV.2025 10:01:20

Duty cycle = $1.306 \text{ ms} / 1.361 \text{ ms} = 95.96\%$
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.18 \text{ dB}$

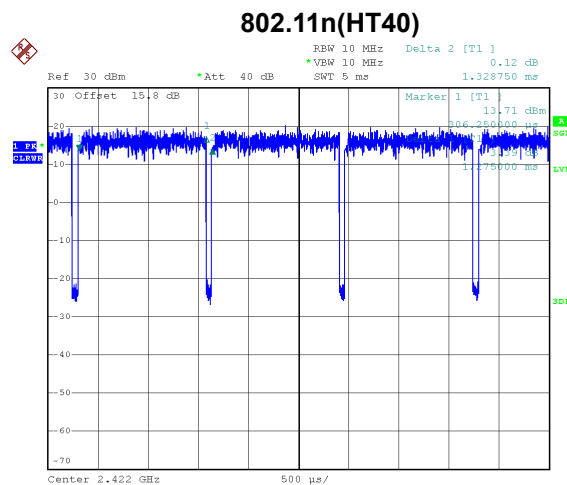

Date: 28.NOV.2025 10:11:09

Duty cycle = $1.275 \text{ ms} / 1.329 \text{ ms} = 95.94\%$
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.18 \text{ dB}$

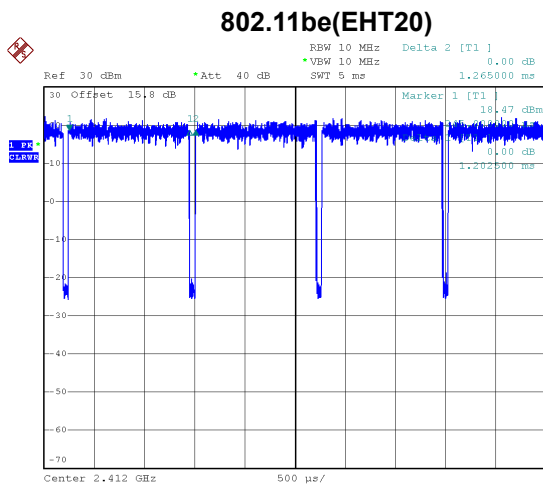

Date: 28.NOV.2025 10:07:58

Duty cycle = 1.203 ms / 1.265 ms = 95.10%
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.22 \text{ dB}$

NOTE:

For IEEE 802.11b:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz.

For IEEE 802.11g:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 720 Hz.

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 766 Hz.

For IEEE 802.11n(HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 784 Hz.


For IEEE 802.11be(EHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 831 Hz.

For IEEE 802.11be(EHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 822 Hz.


(Remark: The video bandwidth of the spectrum analyzer was set to 1kHz during the test.)

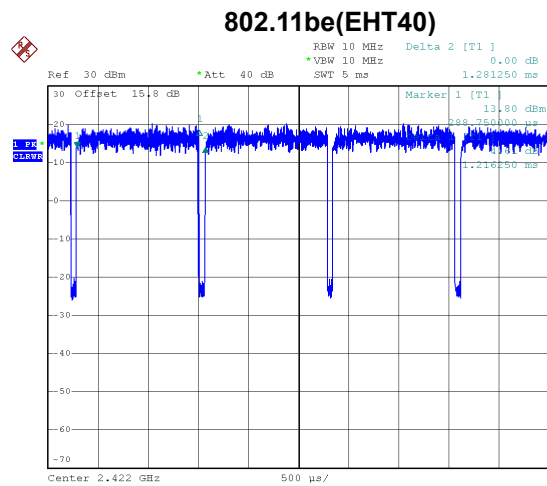

Date: 28.NOV.2025 10:12:16

Duty cycle = 1.216 ms / 1.281 ms = 94.93%
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.23 \text{ dB}$

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

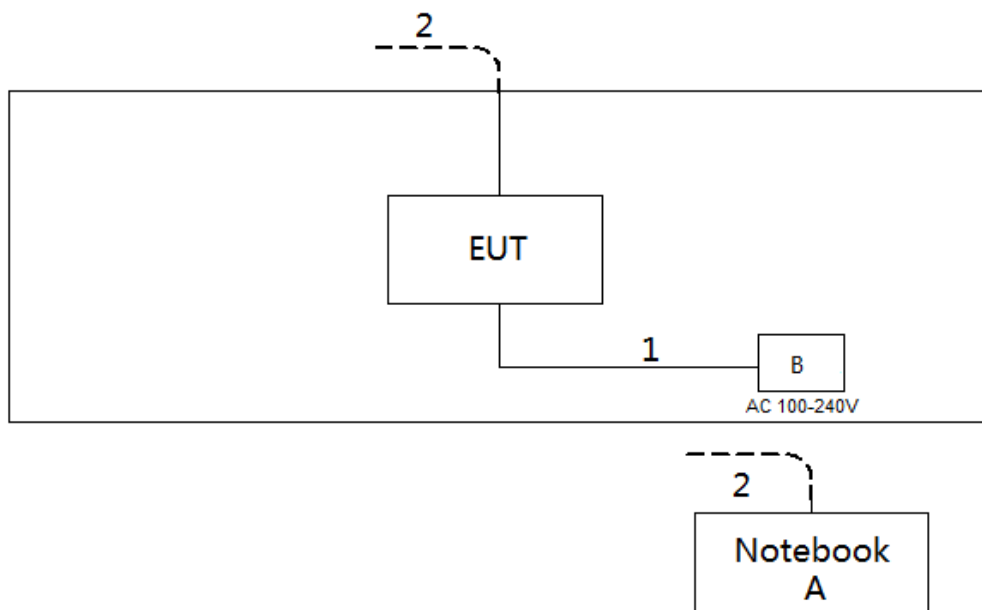

3.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Honor	NDR-WFH	N/A
B	Power Supply	tp-link	T120330-2B4	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	10m

3.7 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain and beamforming gain are provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. Part of the cable losses (0.5dB) are provided by the manufacturer, while the other parts of the cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency of Emission (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
Margin Level = Measurement Value - Limit Value

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

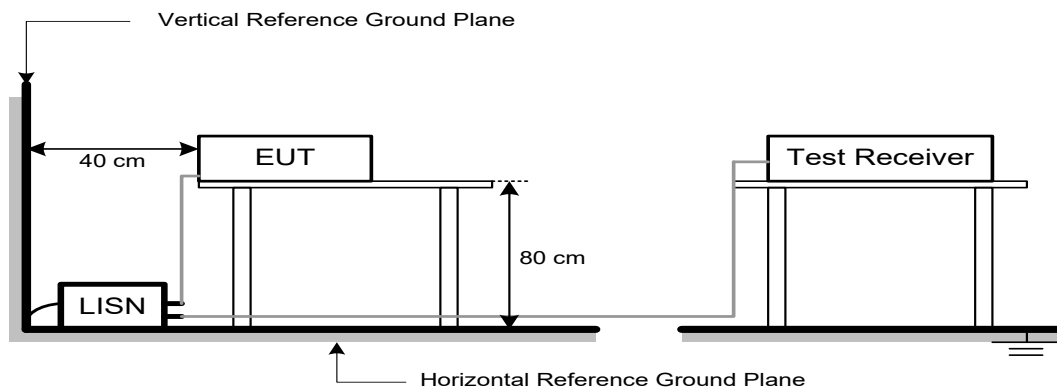

4.5 EUT OPERATION CONDITIONS

EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Band edge/ Harmonic at 3m (dBμV/m)		Harmonic at 1m (dBμV/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	83.5 (Note 5)	63.5 (Note 5)

NOTE:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

(5)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

20log (d_{limit}/d_{measure})=20log (3/1)=9.5 dB.

FS_{limit}: Harmonic at 3m Peak and Average limit.

FS_{max}: Harmonic at 1m Peak and Average Maximum value.

d_{limit}: Harmonic at 3m test distance.

d_{measure}: Harmonic Actual test distance.

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item -EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

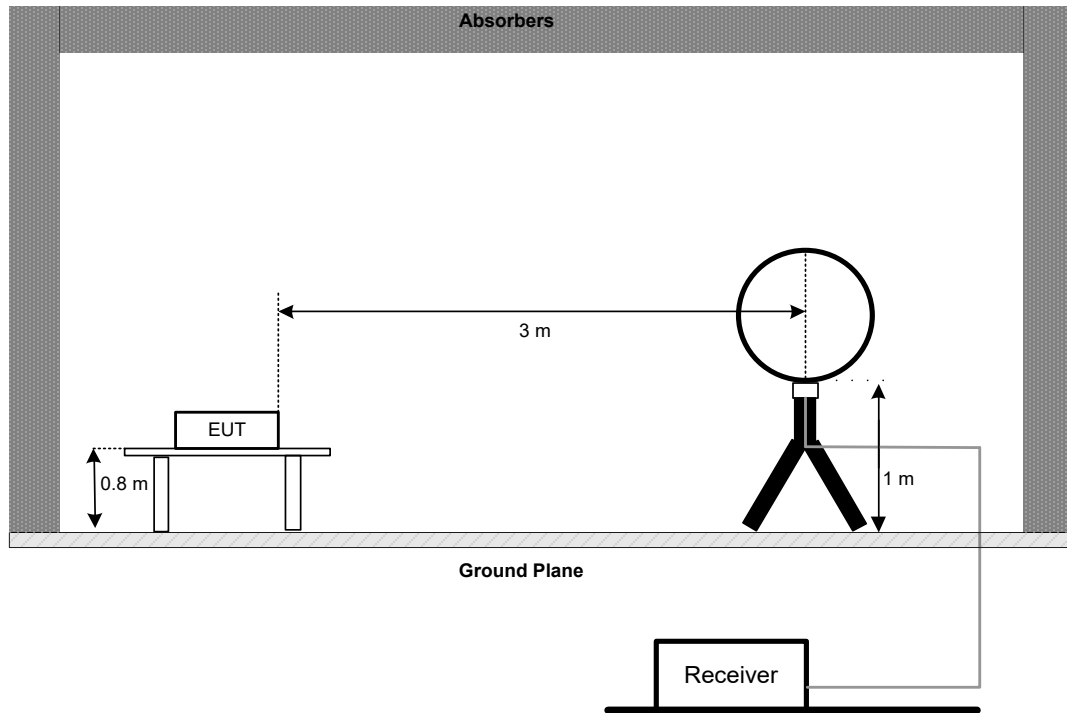


30 MHz to 1 GHz

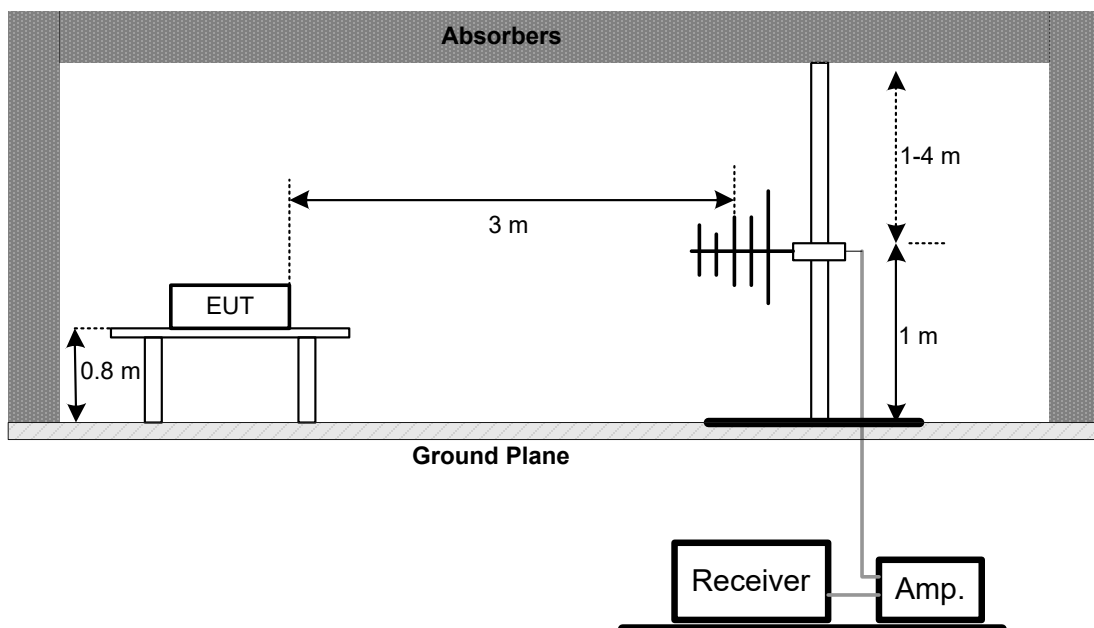

**Above 1 GHz
Band edge & Harmonic(1 GHz to 18 GHz)**

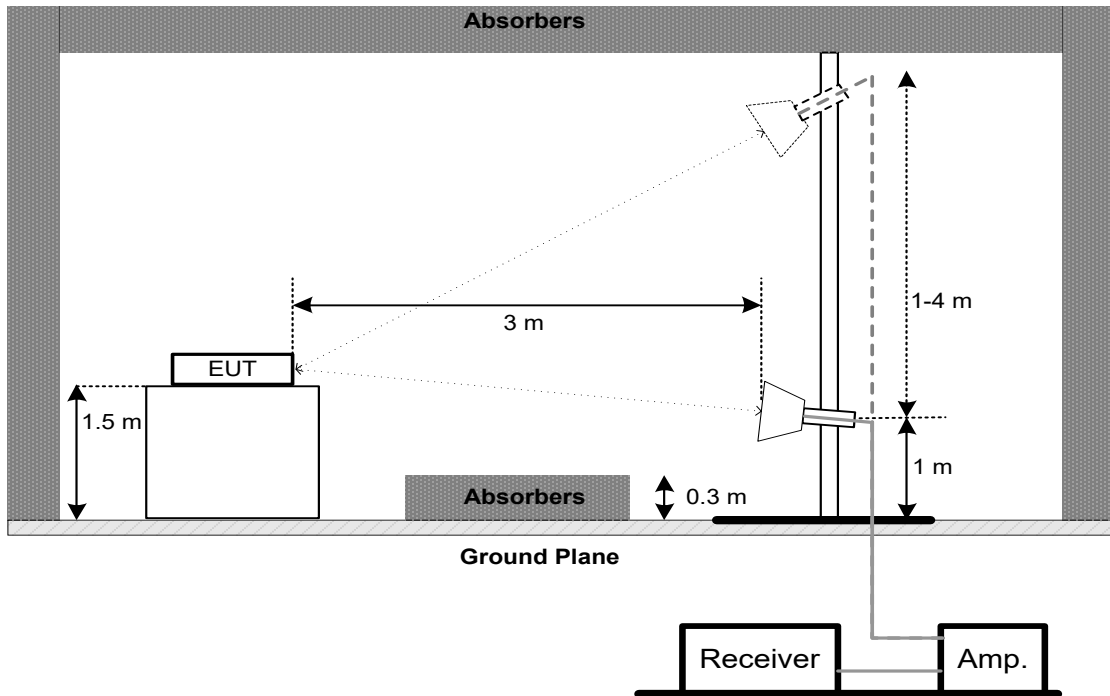

Harmonic(18 GHz to 26.5 GHz)

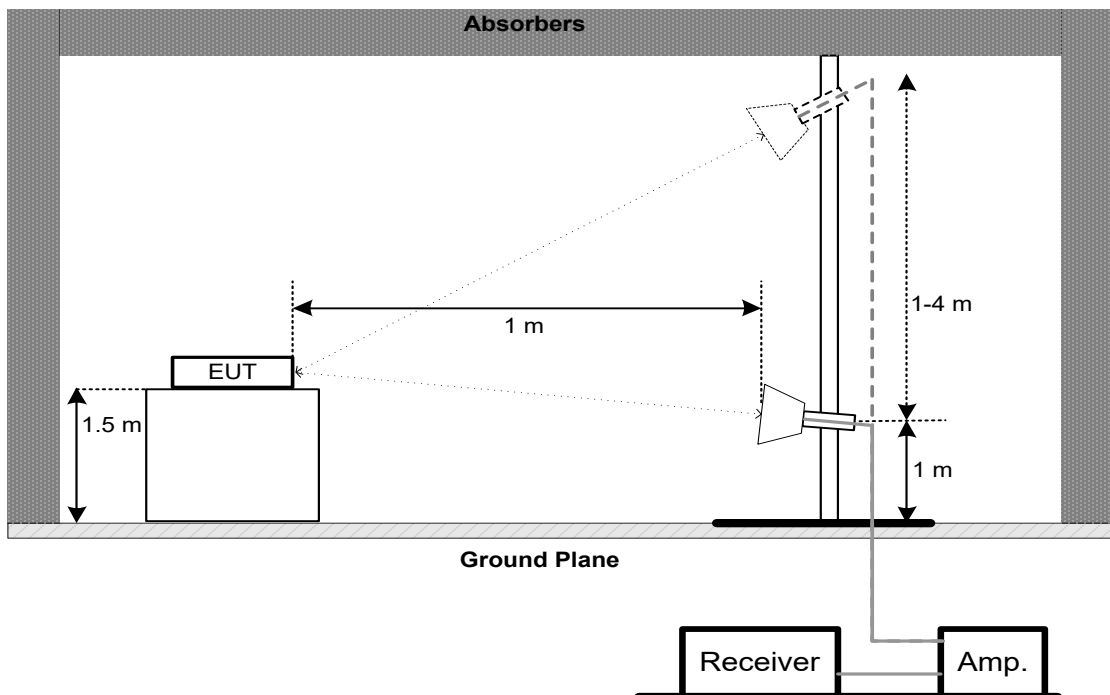

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	Minimum 500 kHz
	99% Emission Bandwidth	-

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span	> Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span	Between 1.5 times and 5.0 times the OBW
RBW	300 kHz For 20MHz 1 MHz For 40MHz
VBW	1 MHz For 20MHz 3 MHz For 40MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 Watt or 30.00 dBm


7.2 TEST PROCEDURE

- The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- The maximum conducted output power was performed in accordance with method 11.9.2.3.1 of ANSI C63.10-2020 and FCC KDB 662911 D01 v02r01 Multiple Transmitter Output.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. CONDUCTED SPURIOUS EMISSIONS

8.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For Reference Level:

Spectrum Parameters	Setting
Span	≥ 1.5 times the bandwidth.
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For Emission Level - Band edge:


Spectrum Parameters	Setting
Start Frequency	2300 MHz
Stop Frequency	2690 MHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For Emission Level - Harmonic:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP**8.5 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. POWER SPECTRAL DENSITY

9.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

9.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span	1.5 times the DTS bandwidth
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions (Test Date: Dec. 09, 2025)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Nov. 21, 2026
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Nov. 21, 2026
3	BTL RE System	BTL	BTL RE System	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M-001	9M	Jul. 08, 2026
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz (Test Date: Nov. 28, 2025)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	00025	Mar. 01, 2026
2	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
3	Cable	RegalWay	LMR400-NMNM-6 m	N/A	Apr. 26, 2026
4	Cable	RegalWay	LMR400-NMRANM -3.5m	N/A	Apr. 26, 2026
5	966 Chamber room	CM	9*6*6	N/A	May 09, 2026

Radiated Emissions - 30 MHz to 1 GHz (Test Date: Dec. 05, 2025)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	947	Oct. 27, 2026
2	Attenuator	EMCI	EMCI-N-6-06	AT-N0670	Oct. 27, 2026
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 17, 2026
4	Cable	RegalWay	LMR400-NMNM-12.5m	N/A	Jun. 04, 2026
5	Cable	RegalWay	LMR400-NMNM-3 m	N/A	Jun. 04, 2026
6	Cable	RegalWay	LMR400-NMNM-0.5m	N/A	Jun. 04, 2026
7	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 15, 2026

Radiated Emissions - 1 GHz - 18 GHz
(Test Date: Dec. 01, 2025 - Dec. 08, 2025)

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	966 Chamber room	CM	9*6*6	N/A	May 15, 2026
4	Cable	RegalWay	RWLP50-4.0A-SMS M-12.5M	N/A	Jun. 29, 2026
5	Cable	RegalWay	RWLP50-4.0A-NM RASM-2.5M	N/A	Jun. 29, 2026
6	Cable	RegalWay	RWLP50-4.0A-NM RASMRA-0.8M	N/A	Jun. 29, 2026
7	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
8	Double Ridged Guide Antenna	ETS	3115	75846	Mar. 02, 2026
9	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980888	Oct. 17, 2026
10	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
11	Filter	STI	STI15-9912	N/A	May 27, 2026

Radiated Emissions - Above 18 GHz
(Test Date: Dec. 06, 2025)

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Cable	Tonscend	HF160-KMKM-0.5M	N/A	Oct. 21, 2026
2	Cable	Tonscend	HF160-KMKM-5M	N/A	Oct. 21, 2026
3	Pre-Amplifier	EMC INSTRUMENT	EMC184045SE	980409	Nov. 21, 2026
4	DRG Horn Antenna	ETS	3116C	218942	Feb. 28, 2026
5	Positioning Controller	MF	MF-7802	N/A	N/A
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
7	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63380204	Jul. 25, 2026

**Bandwidth &
Conducted Spurious Emissions &
Power Spectral Density**
(Test Date: Nov. 28, 2025)

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	May 17, 2026
2	CTA	BTL	CTA	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A

Maximum Output Power
(Test Date: Nov. 27, 2025 – Dec. 22, 2025)


Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	May 17, 2026
2	Wideband power sensor	Keysight	N1923A	MY58310004	May 17, 2026
3	Isolation attenuator	Z-Link	ASMA-10-18-2W	N/A	N/A



Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

11. EUT TEST PHOTO



AC Power Line Conducted Emissions Test Photos

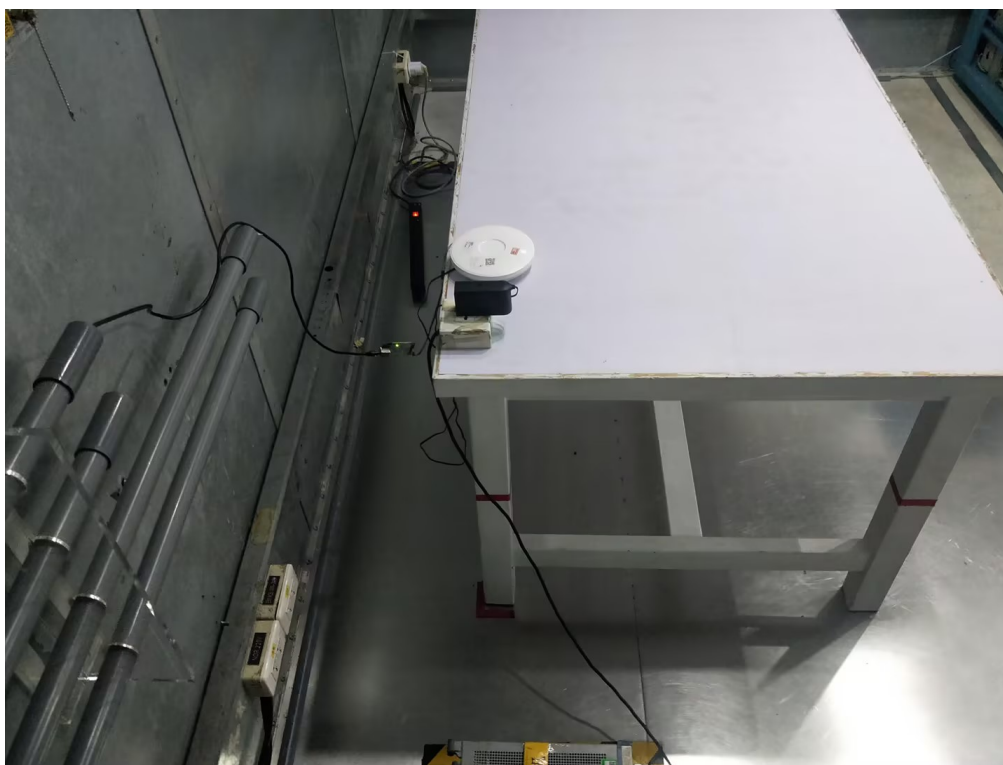

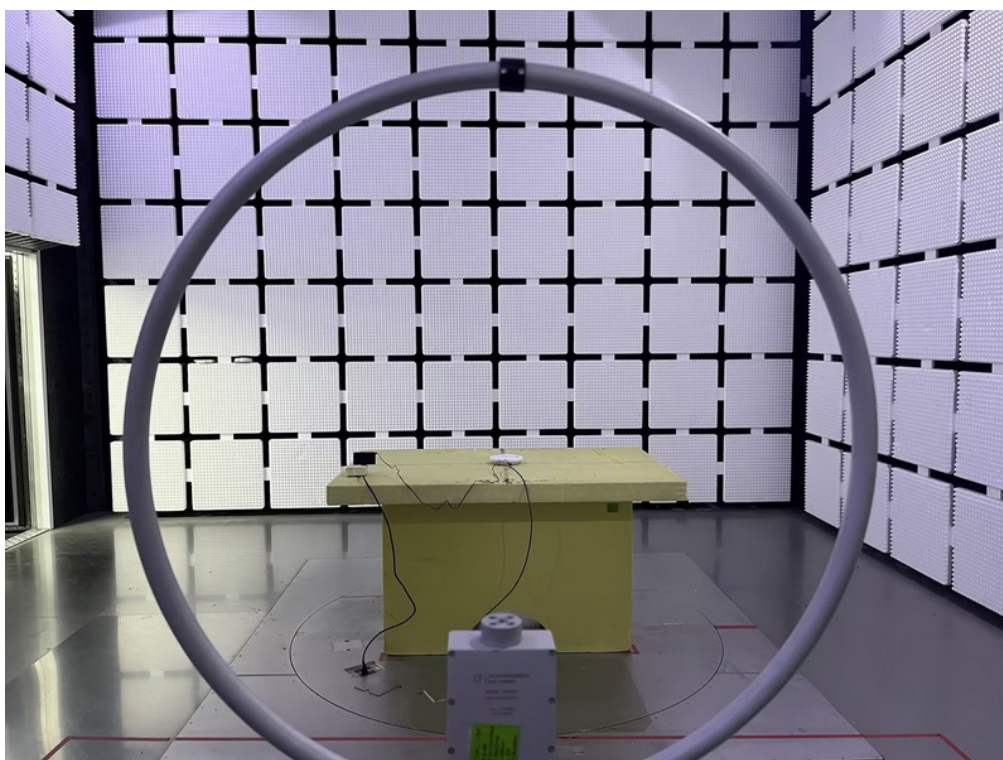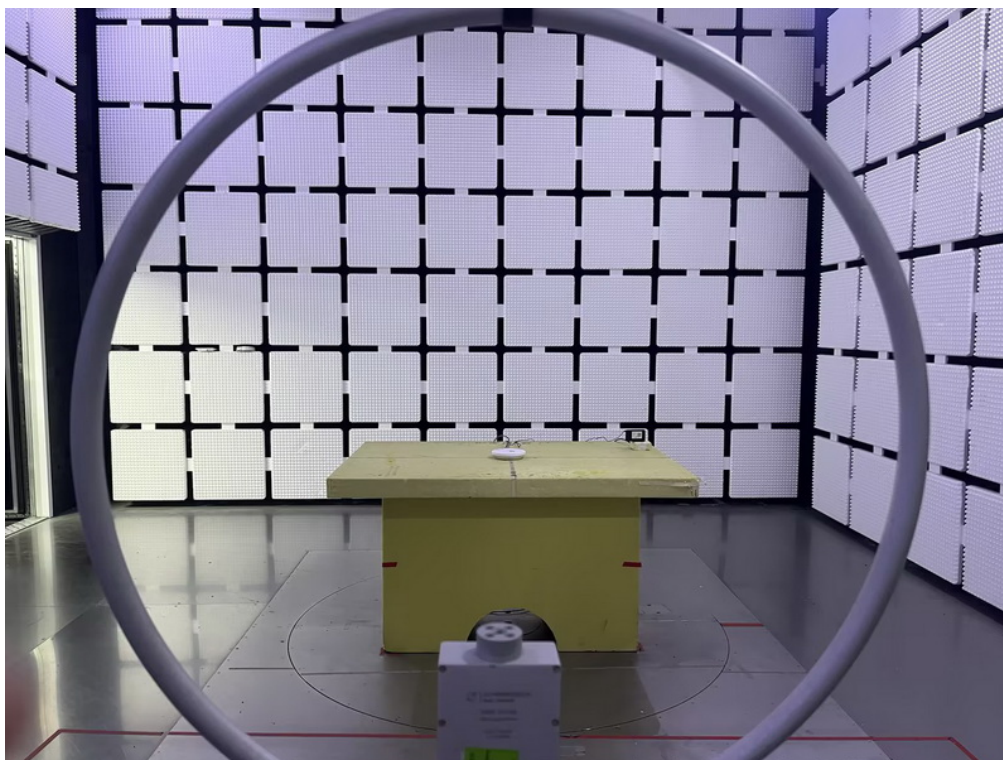Radiated Emissions Test Photos**9 kHz to 30 MHz**



Radiated Emissions Test Photos


30 MHz to 1 GHz

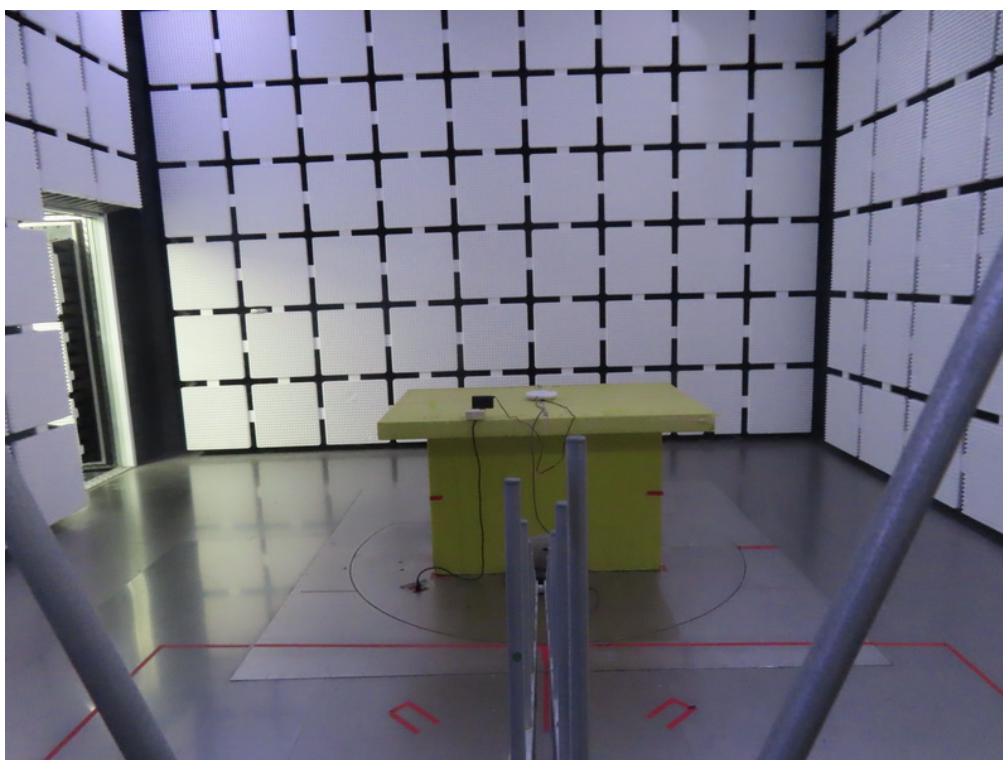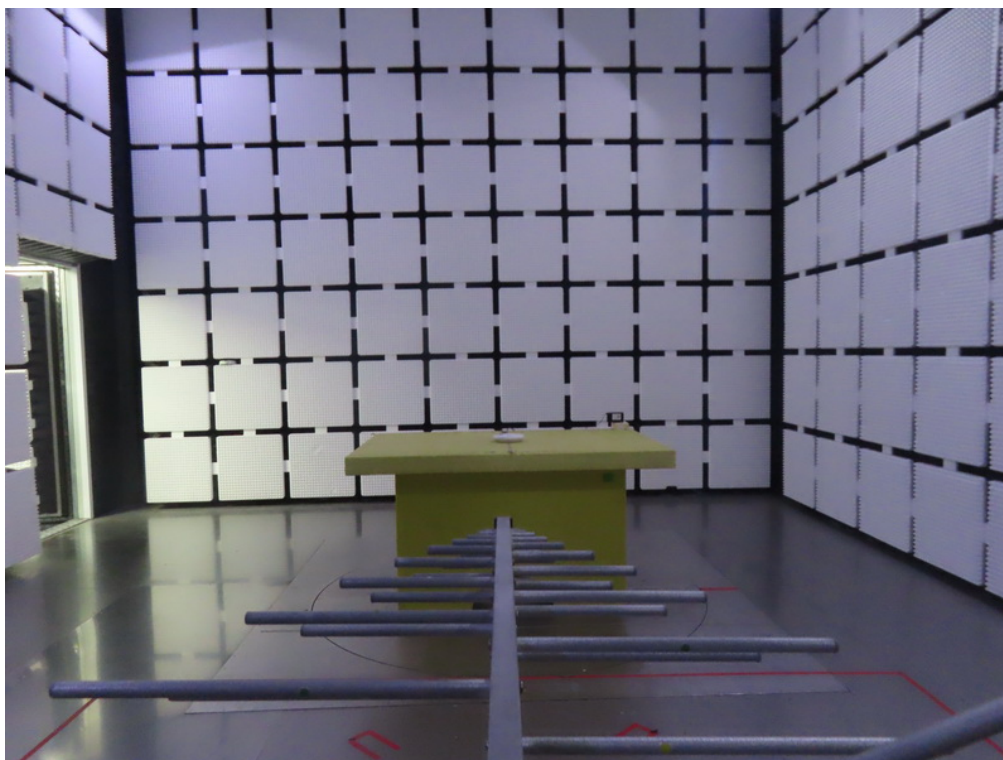


Radiated Emissions Test Photos

Band edge & Harmonic(1 GHz to 18 GHz)

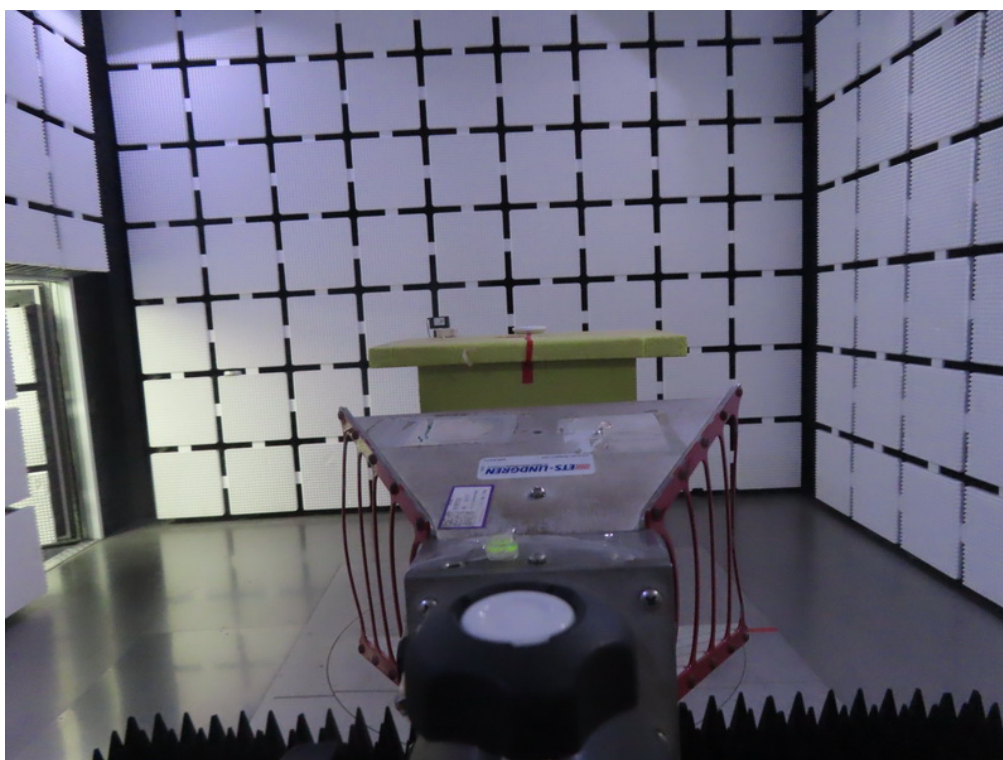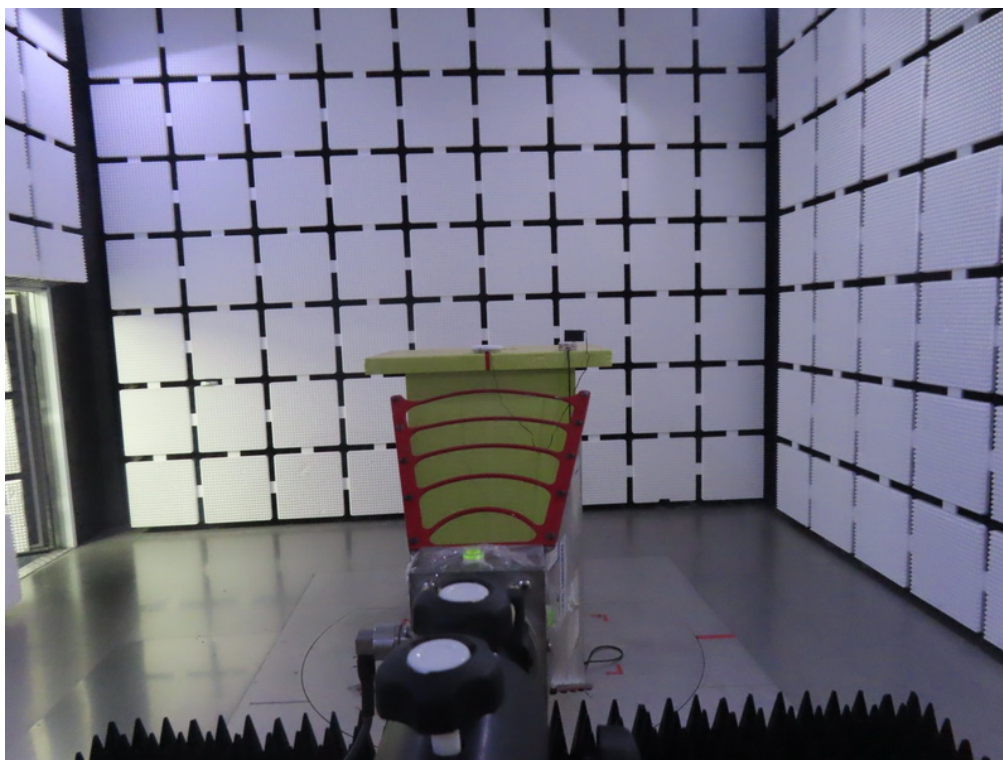

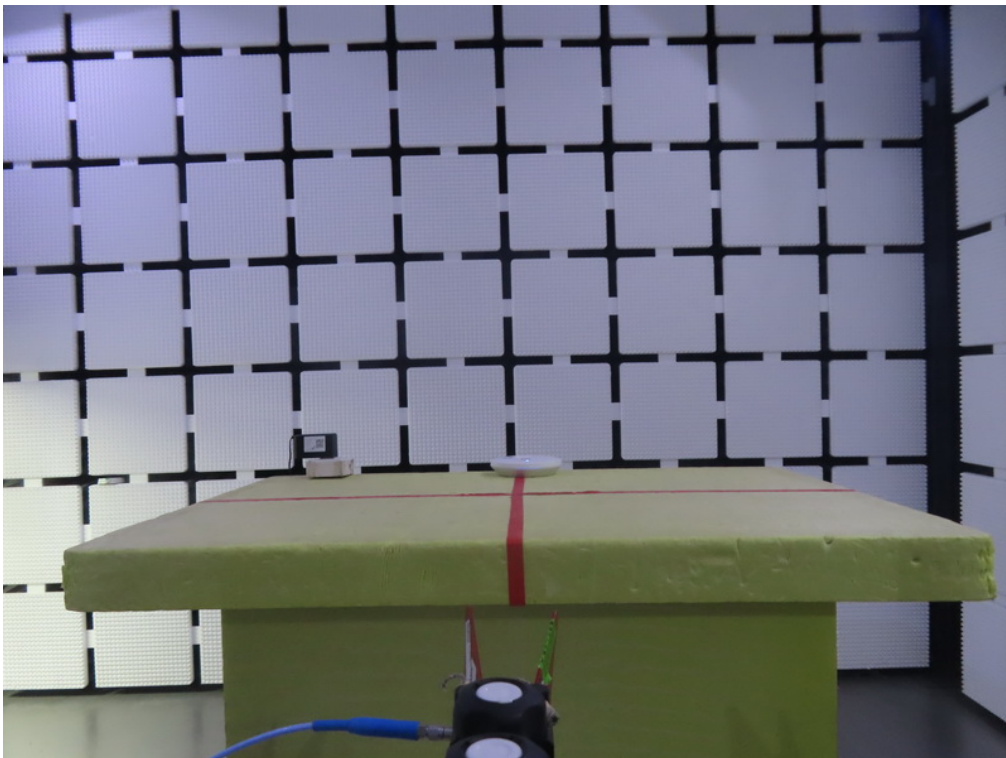
Radiated Emissions Test Photos**Harmonic(18 GHz to 26.5 GHz)**

Conducted Test Photos

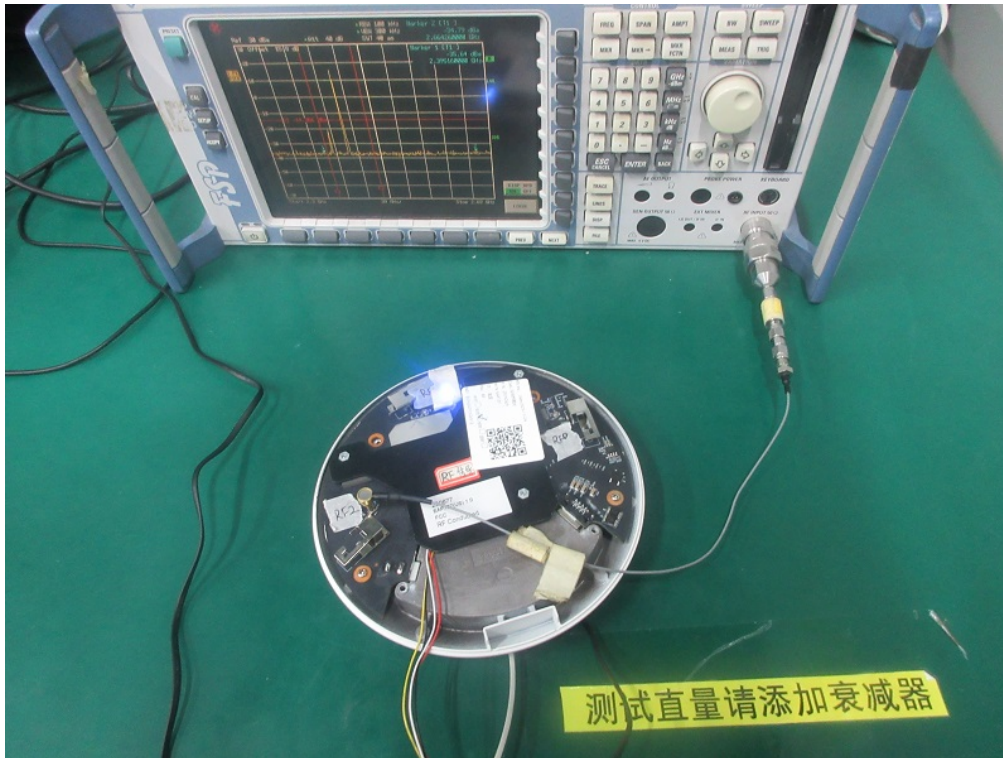

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX G Mode Channel 06	Phase	Line
-----------	----------------------	-------	------

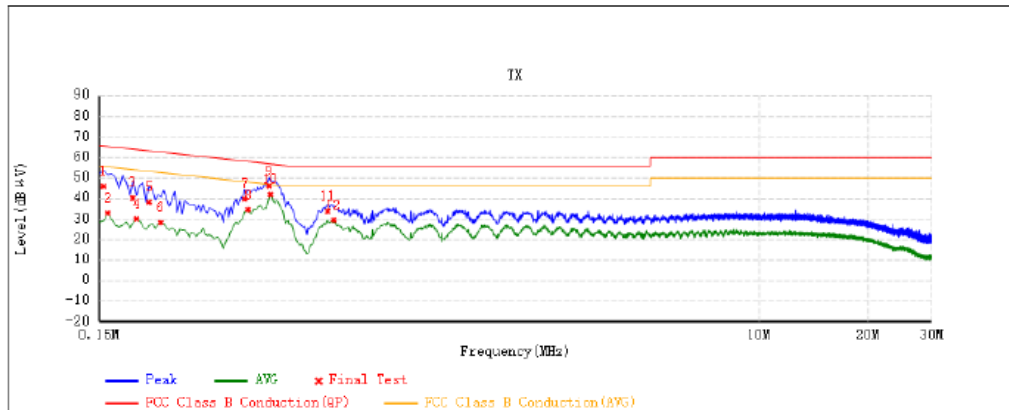


Suspected Note List									
NO.	Freq. [MHz]	Reading [dBuV]	Factor [dB]	Level [dBuV]	Limit [dBuV]	Margin [dB]	Detector	Content	
1	0.1539	35.73	10.37	46.1	65.79	-19.69	QP		
2	0.158	22.52	10.37	32.89	55.57	-22.68	AVG		
3	0.1856	29.88	10.39	40.27	64.23	-23.96	QP		
4	0.19	19.76	10.39	30.15	54.04	-23.88	AVG		
5	0.2055	27.92	10.4	38.33	63.38	-25.06	QP		
6	0.222	17.89	10.41	28.3	52.74	-24.45	AVG		
7	0.378	29.35	10.46	39.8	58.32	-18.52	QP		
8	0.386	24.24	10.46	34.69	48.15	-13.46	AVG		
9	0.442	35.79	10.47	46.26	57.02	-10.77	QP		
*	10	0.446	31.53	42	46.95	-4.95	AVG		
11	0.6417	23.23	10.51	33.74	56	-22.26	QP		
12	0.666	19.13	10.51	29.65	46	-16.35	AVG		

REMARKS:

(1) Level = Reading + Factor.

(2) Margin = Level - Limit.

Test Mode	TX G Mode Channel 06	Phase	Neutral
-----------	----------------------	-------	---------

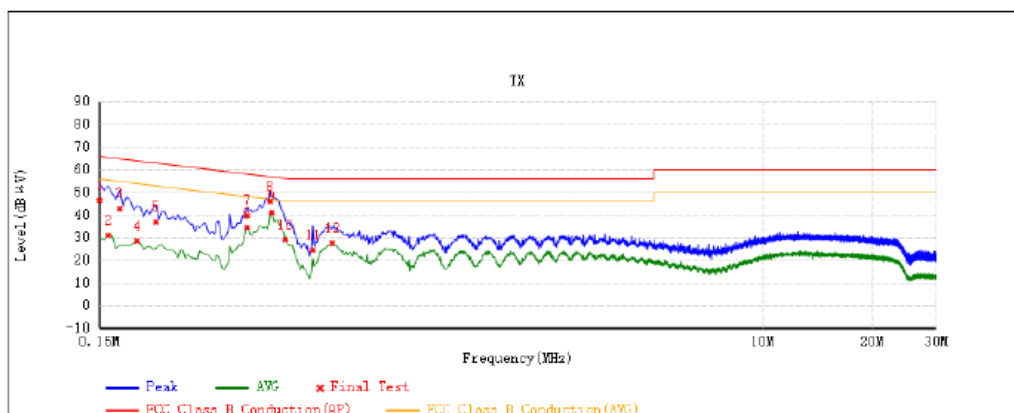


Suspected Note List									
	NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content
	1	0.15	36.08	10.42	46.49	66	-19.51	QP	
	2	0.158	20.75	10.42	31.17	55.57	-24.4	AVG	
	3	0.1702	32.58	10.43	43.01	64.95	-21.94	QP	
	4	0.19	18.28	10.44	28.72	54.04	-25.32	AVG	
	5	0.2141	26.68	10.44	37.13	63.04	-25.92	QP	
	6	0.382	24.22	10.49	34.71	48.24	-13.52	AVG	
	7	0.3823	29.27	10.49	39.76	58.23	-18.47	QP	
	8	0.4418	35.58	10.5	46.08	57.03	-10.95	QP	
*	9	0.446	30.79	10.5	41.29	46.95	-5.66	AVG	
	10	0.486	18.72	10.51	29.22	46.24	-17.01	AVG	
	11	0.5779	14.11	10.53	24.63	56	-31.37	QP	
	12	0.654	17.14	10.54	27.67	46	-18.33	AVG	

REMARKS:

- (1) Level = Reading + Factor.
- (2) Margin = Level - Limit.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX G Mode Channel 06	Polarization	Ant 0°
-----------	----------------------	--------------	--------

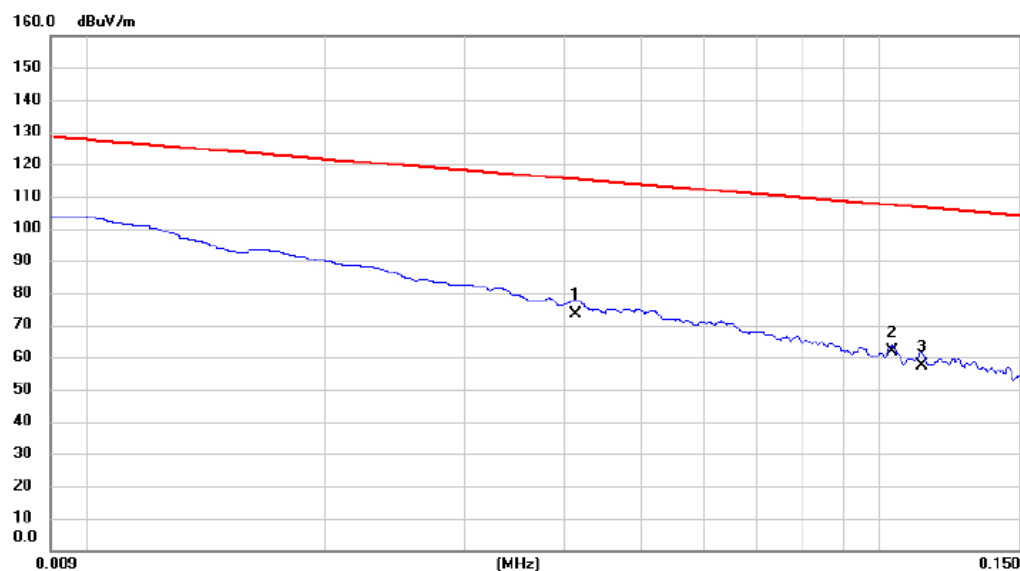


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.041	53.27	20.14	73.41	115.29	-41.88	AVG	
2		0.104	41.86	20.13	61.99	107.28	-45.29	QP	
3		0.113	37.25	20.11	57.36	106.56	-49.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode Channel 06	Polarization	Ant 0°
-----------	----------------------	--------------	--------

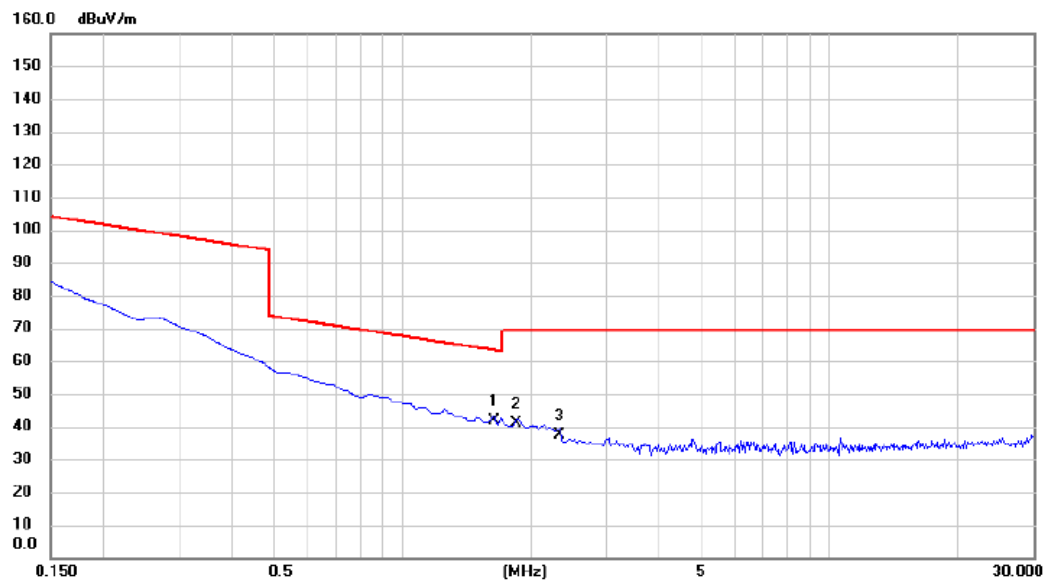


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	1.643	21.75	20.01	41.76	63.29	-21.53	QP	
2		1.851	20.86	20.01	40.87	69.54	-28.67	QP	
3		2.329	17.52	20.03	37.55	69.54	-31.99	QP	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode Channel 06	Polarization	Ant 90°
-----------	----------------------	--------------	---------

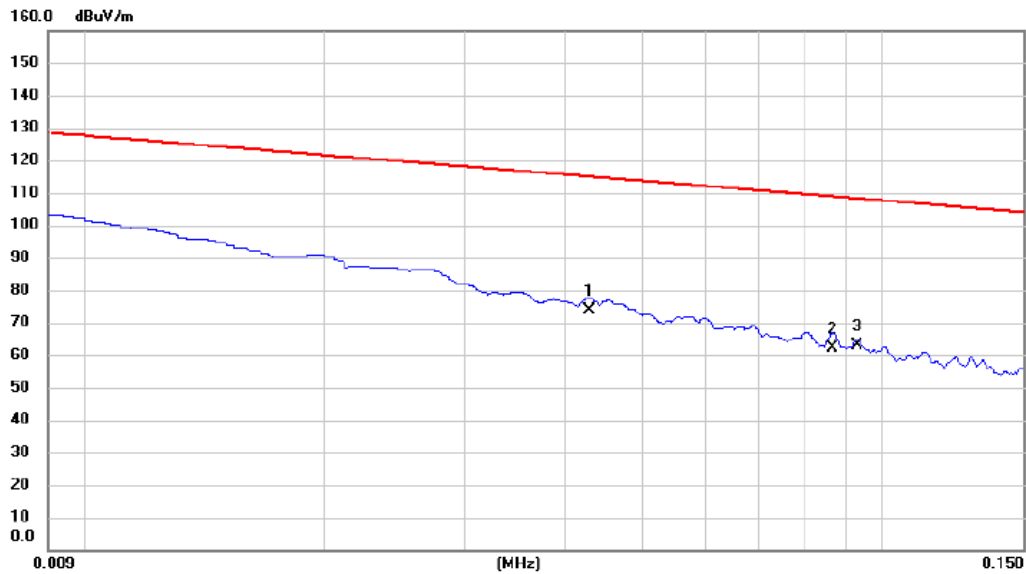


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	0.043	53.86	20.14	74.00	114.94	-40.94	AVG	
2	0.087	42.21	20.14	62.35	108.84	-46.49	AVG	
3	0.093	42.89	20.14	63.03	108.24	-45.21	QP	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode Channel 06	Polarization	Ant 90°
-----------	----------------------	--------------	---------

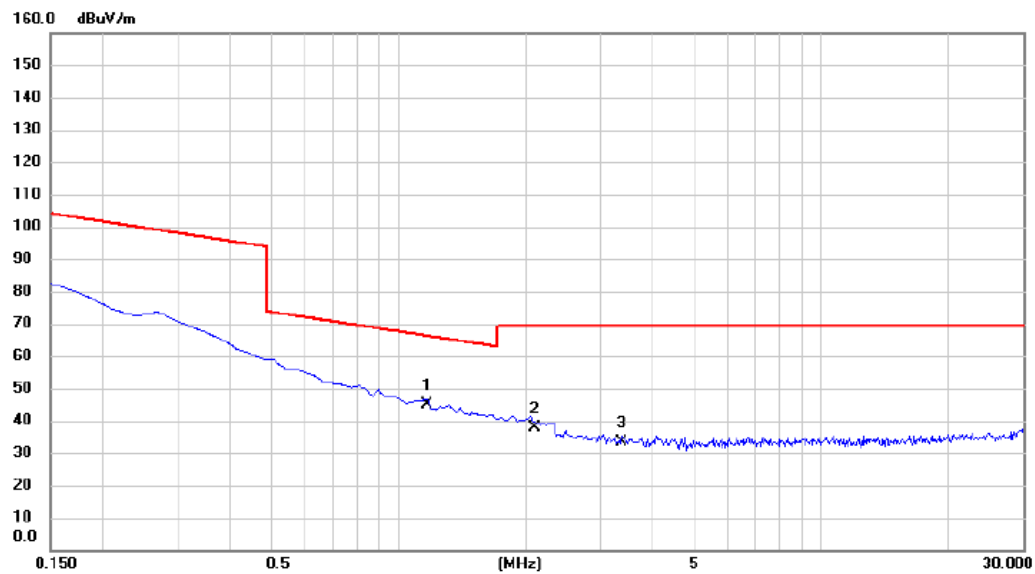

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	1.165	24.83	20.00	44.83	66.28	-21.45	QP	
2		2.099	17.95	20.01	37.96	69.54	-31.58	QP	
3		3.374	13.28	20.09	33.37	69.54	-36.17	QP	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX G Mode Channel 06	Polarization	Vertical
-----------	----------------------	--------------	----------

80 dBuV/m

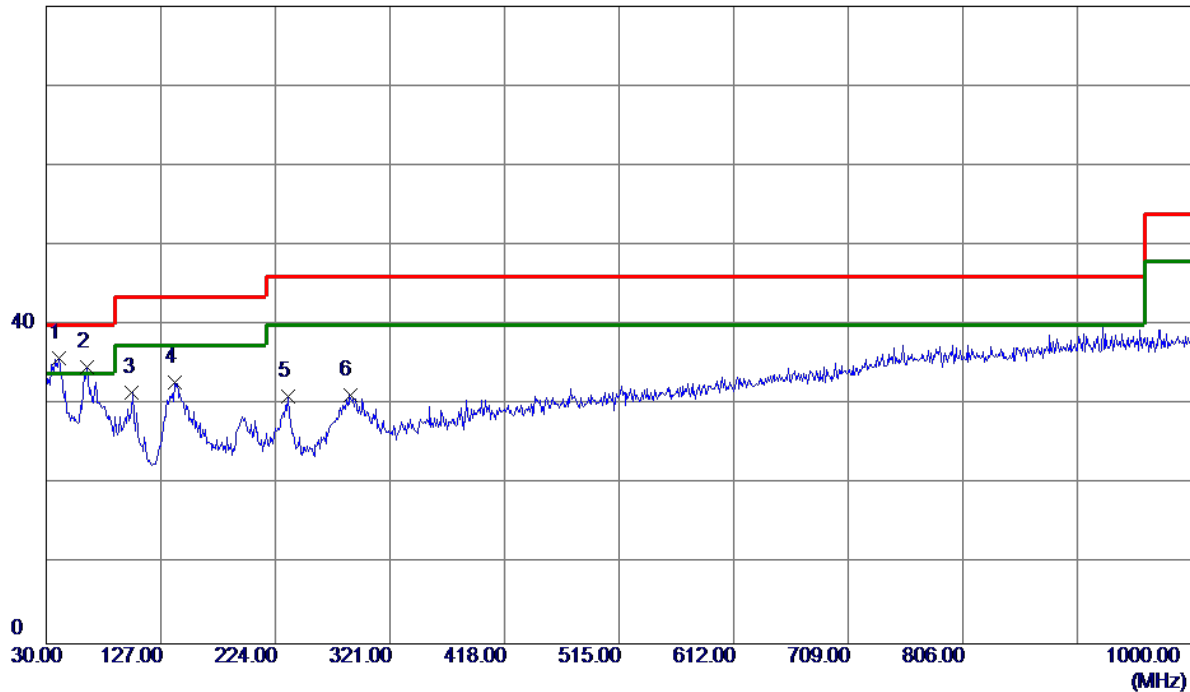

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	40.6699	47.35	-11.55	35.80	40.00	-4.20	Peak	
2	64.9200	46.93	-12.19	34.74	40.00	-5.26	Peak	
3	102.7500	46.44	-14.97	31.47	43.52	-12.05	Peak	
4	138.6400	43.83	-11.08	32.75	43.52	-10.77	Peak	
5	234.6700	42.40	-11.30	31.10	46.02	-14.92	Peak	
6	287.0500	40.62	-9.42	31.20	46.02	-14.82	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode Channel 06	Polarization	Horizontal
-----------	----------------------	--------------	------------

80 dBuV/m

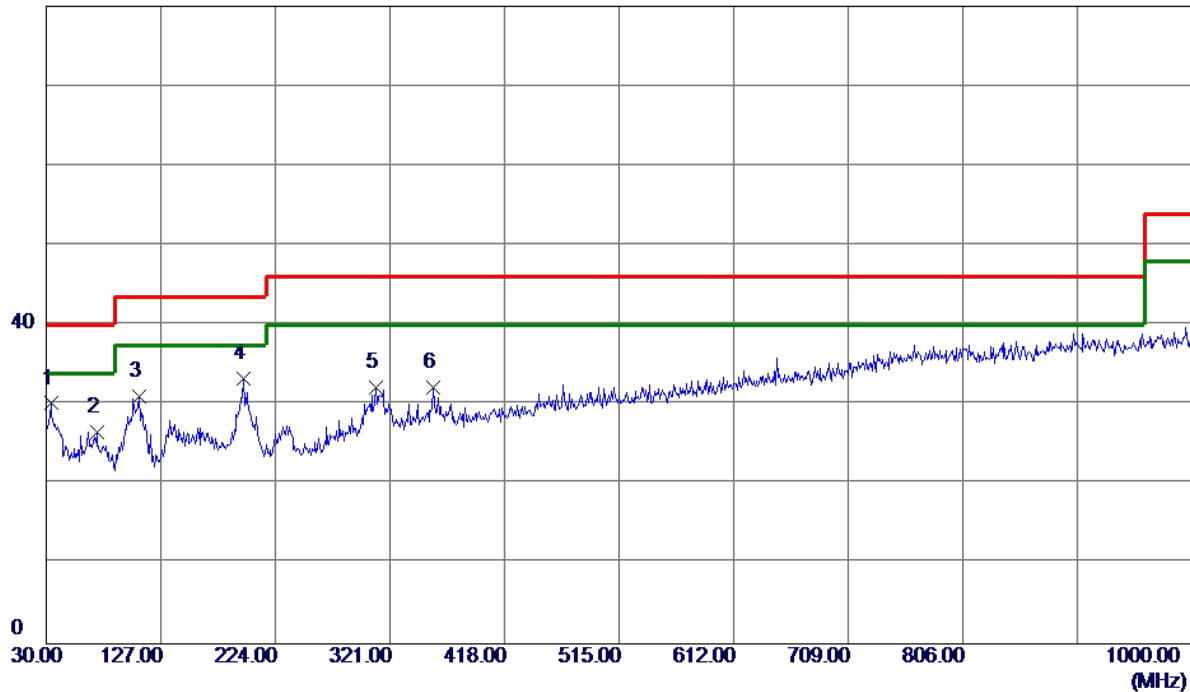

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	33.8800	42.58	-12.42	30.16	40.00	-9.84	Peak	
2	72.6800	40.27	-13.66	26.61	40.00	-13.39	Peak	
3	108.5700	45.16	-14.09	31.07	43.52	-12.45	Peak	
4	196.8400	46.24	-12.93	33.31	43.52	-10.21	Peak	
5	309.3599	41.11	-8.94	32.17	46.02	-13.85	Peak	
6	357.8599	40.42	-8.19	32.23	46.02	-13.79	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ

Test Mode	TX B Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

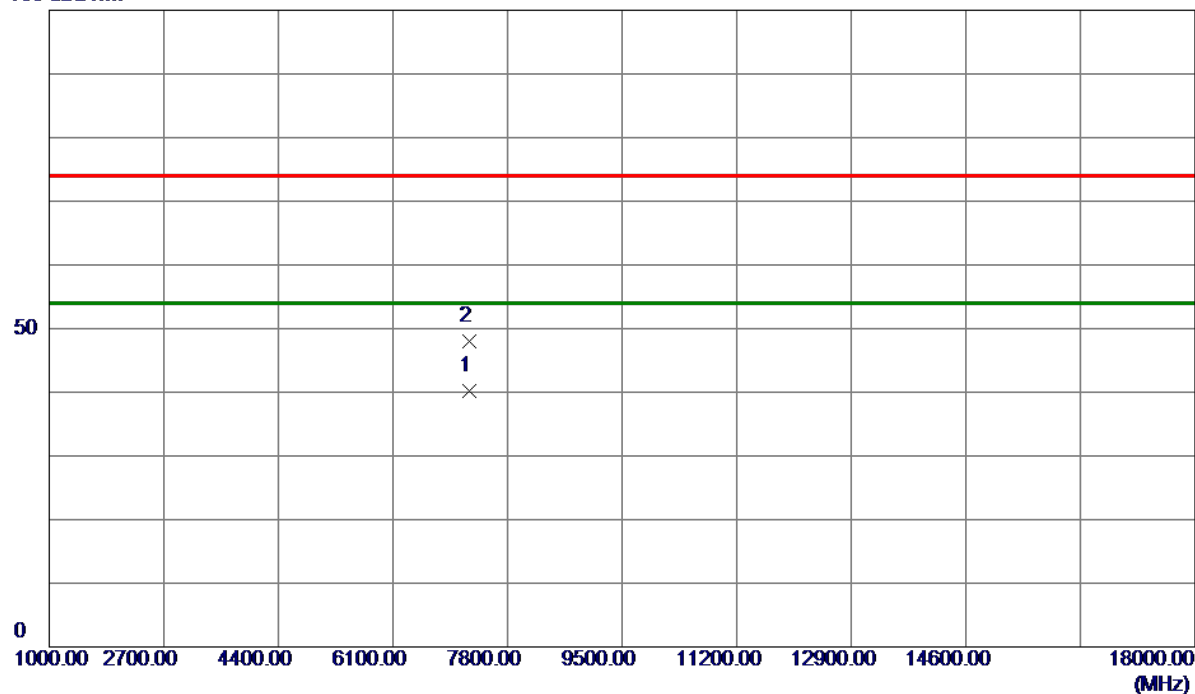


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7236.8200	30.65	9.60	40.25	54.00	-13.75	AVG	
2	7237.0000	38.45	9.60	48.05	74.00	-25.95	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

130 dBuV/m

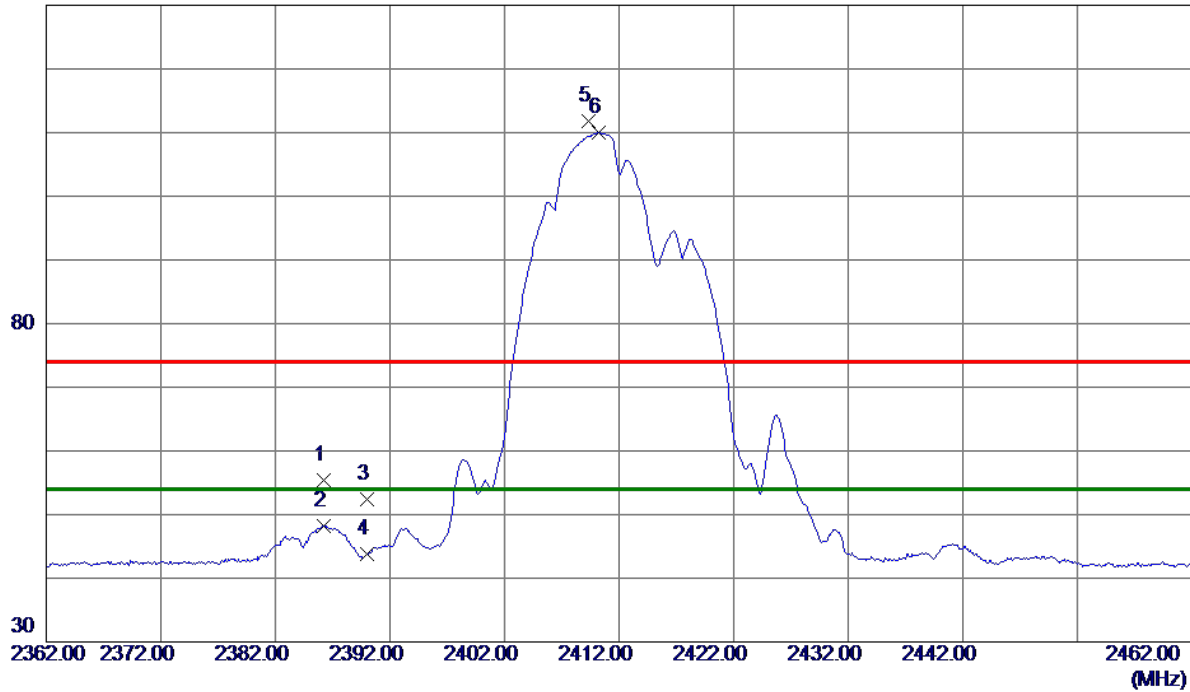

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2386.2000	47.68	7.77	55.45	74.00	-18.55	Peak	
2	2386.2000	40.49	7.77	48.26	54.00	-5.74	AVG	
3	2390.0000	44.70	7.78	52.48	74.00	-21.52	Peak	
4	2390.0000	36.05	7.78	43.83	54.00	-10.17	AVG	
5	2409.3000	104.00	7.82	111.82	74.00	37.82	Peak	No Limit
6 *	2410.2000	102.16	7.82	109.98	54.00	55.98	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2417 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

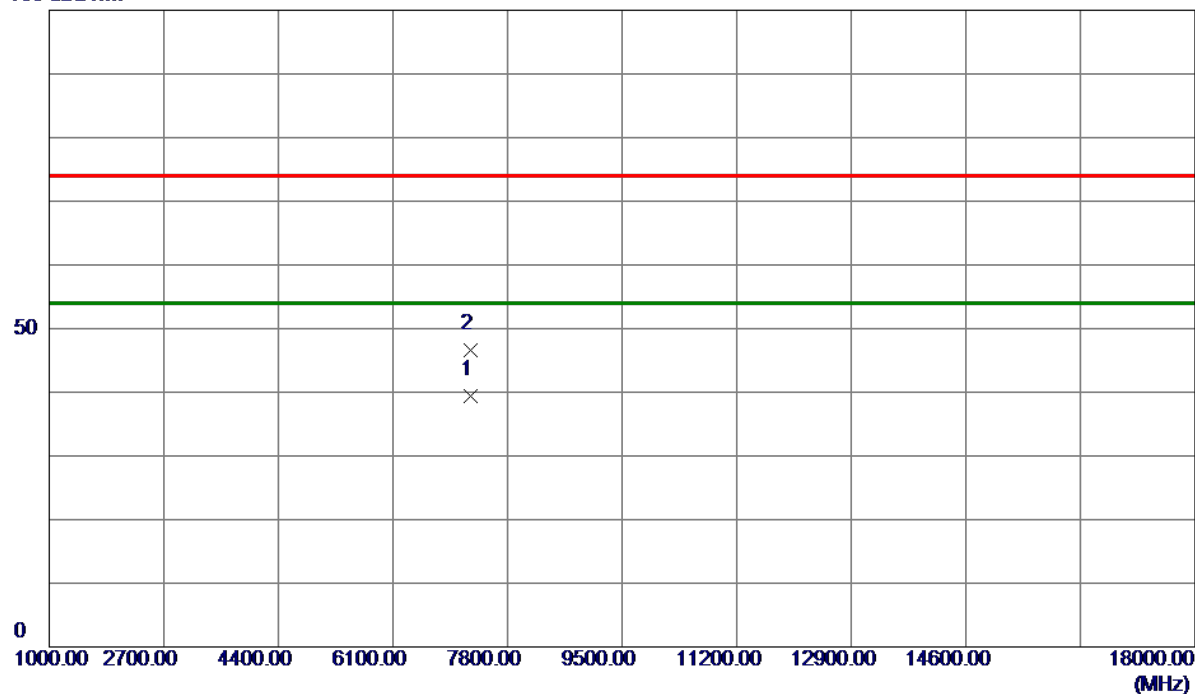


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7250.1800	29.91	9.59	39.50	54.00	-14.50	AVG	
2	7250.3600	37.11	9.59	46.70	74.00	-27.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2417 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

130 dBuV/m

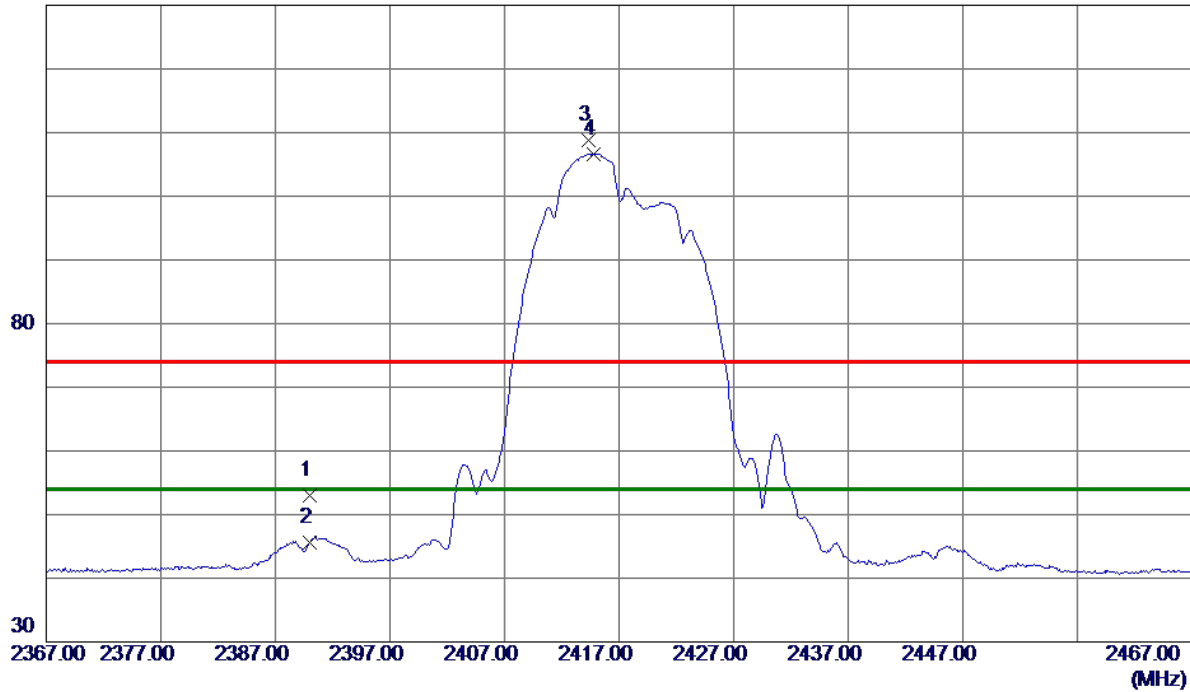

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	45.31	7.78	53.09	74.00	-20.91	Peak	
2	2390.0000	37.89	7.78	45.67	54.00	-8.33	AVG	
3	2414.3000	101.05	7.83	108.88	74.00	34.88	Peak	No Limit
4 *	2414.8000	98.85	7.84	106.69	54.00	52.69	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

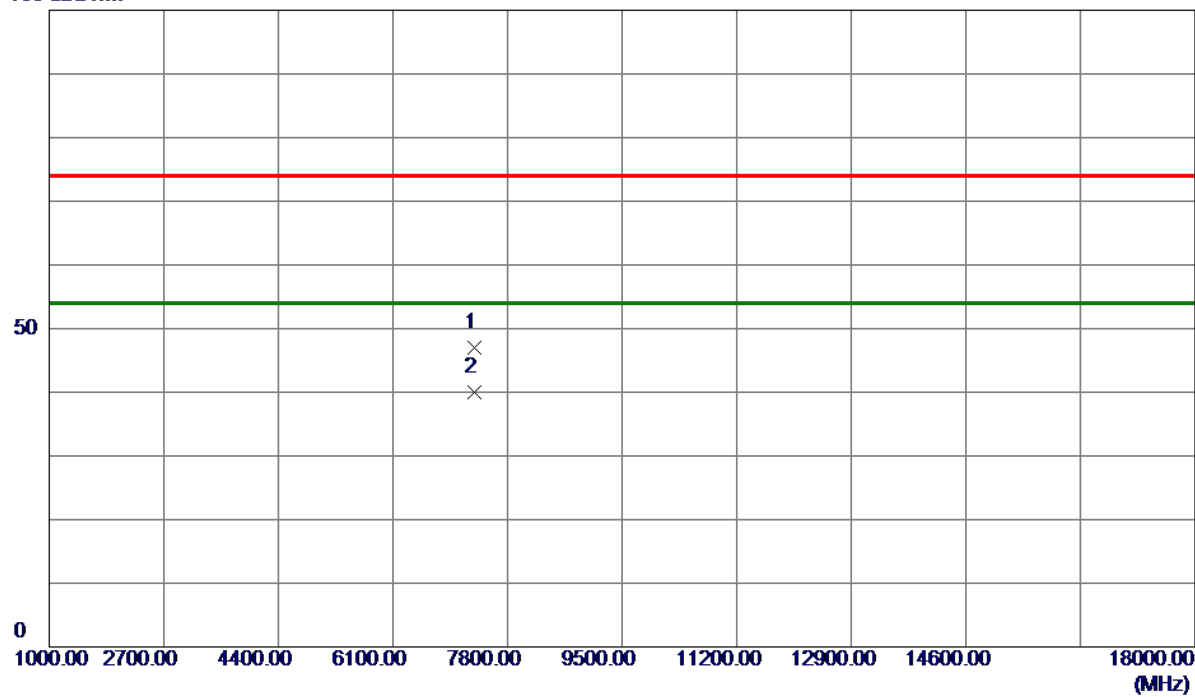


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7310.1200	37.44	9.55	46.99	74.00	-27.01	Peak	
2 *	7311.7800	30.47	9.55	40.02	54.00	-13.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

130 dBuV/m

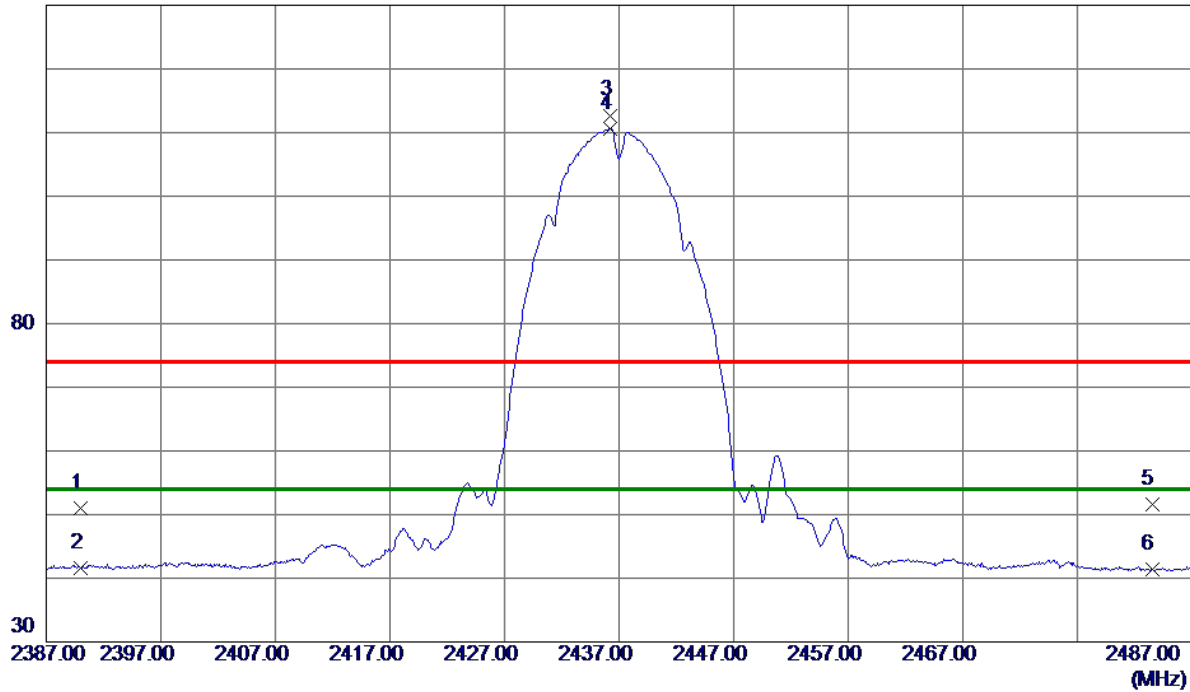

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	43.14	7.78	50.92	74.00	-23.08	Peak	
2	2390.0000	33.86	7.78	41.64	54.00	-12.36	AVG	
3	2436.2000	104.81	7.89	112.70	74.00	38.70	Peak	No Limit
4 *	2436.2000	102.66	7.89	110.55	54.00	56.55	AVG	No Limit
5	2483.5000	43.59	8.00	51.59	74.00	-22.41	Peak	
6	2483.5000	33.42	8.00	41.42	54.00	-12.58	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2457 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

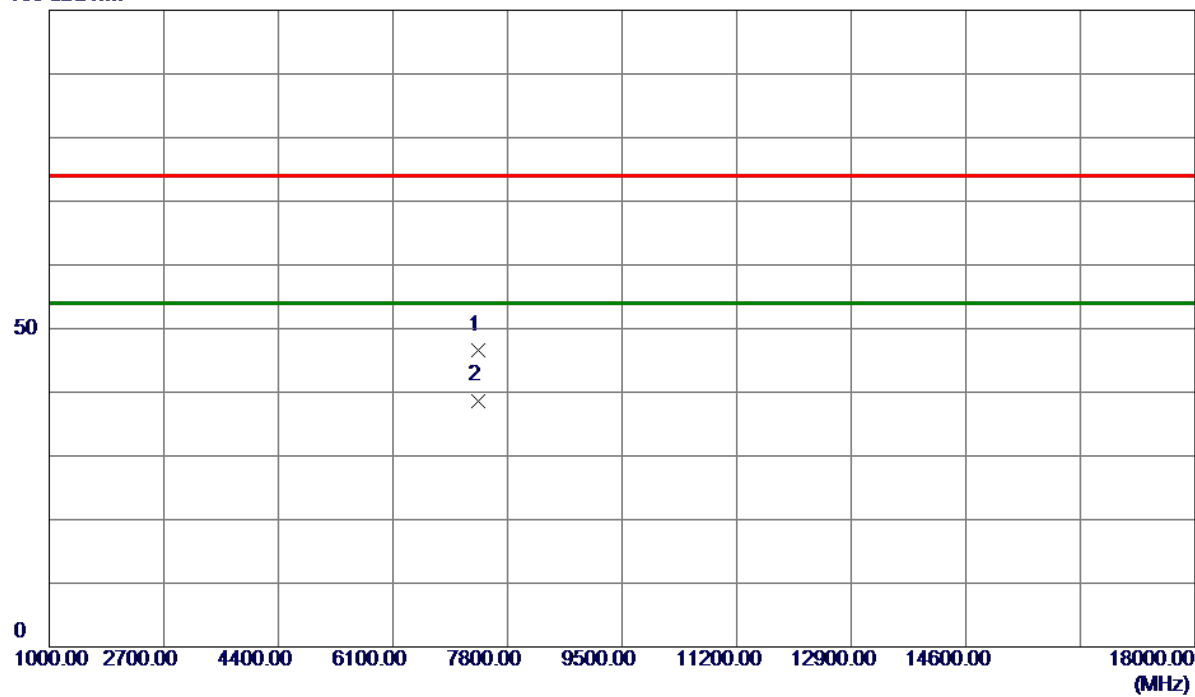


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7368.5500	37.13	9.50	46.63	74.00	-27.37	Peak	
2 *	7370.2500	29.20	9.50	38.70	54.00	-15.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2457 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

130 dBuV/m

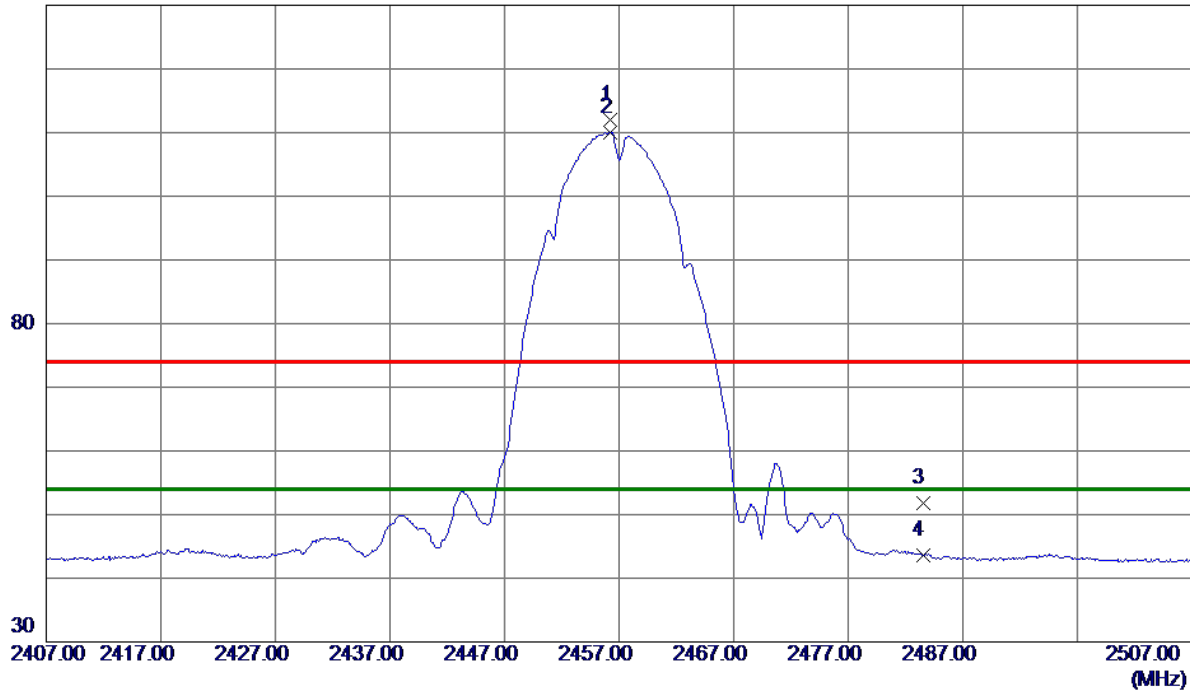

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2456.2000	104.12	7.93	112.05	74.00	38.05	Peak	No Limit
2 *	2456.2000	102.15	7.93	110.08	54.00	56.08	AVG	No Limit
3	2483.5000	43.76	8.00	51.76	74.00	-22.24	Peak	
4	2483.5000	35.58	8.00	43.58	54.00	-10.42	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

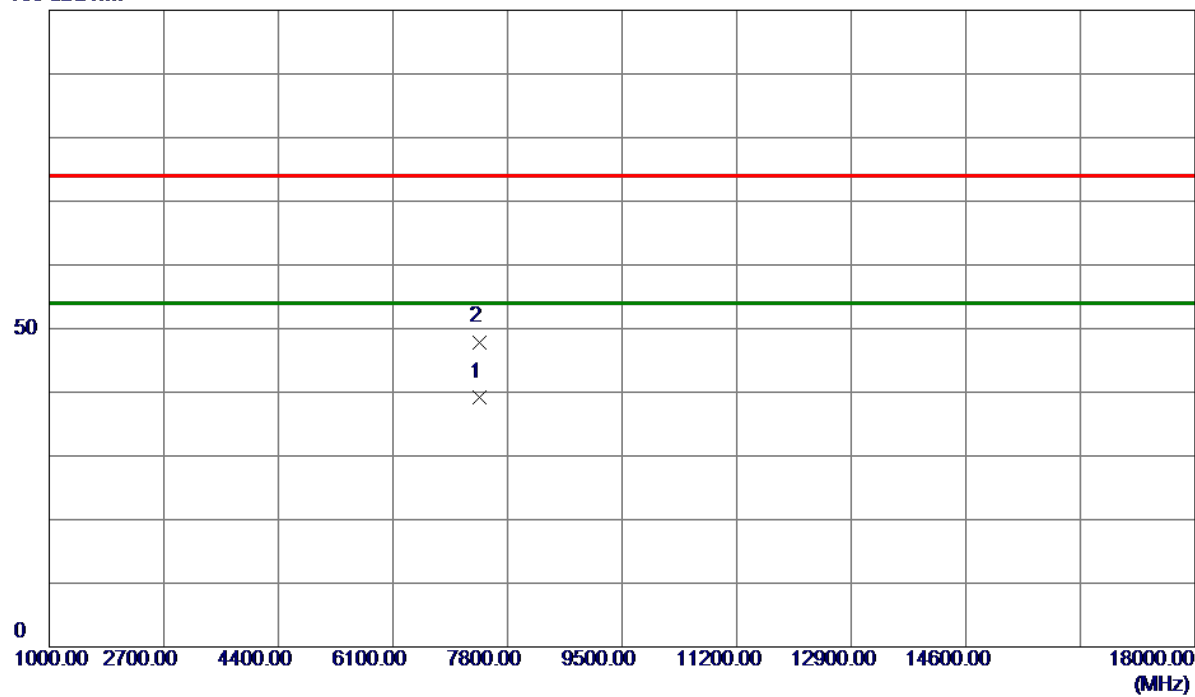


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7384.3400	29.65	9.49	39.14	54.00	-14.86	AVG	
2	7385.1200	38.41	9.49	47.90	74.00	-26.10	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

130 dBuV/m

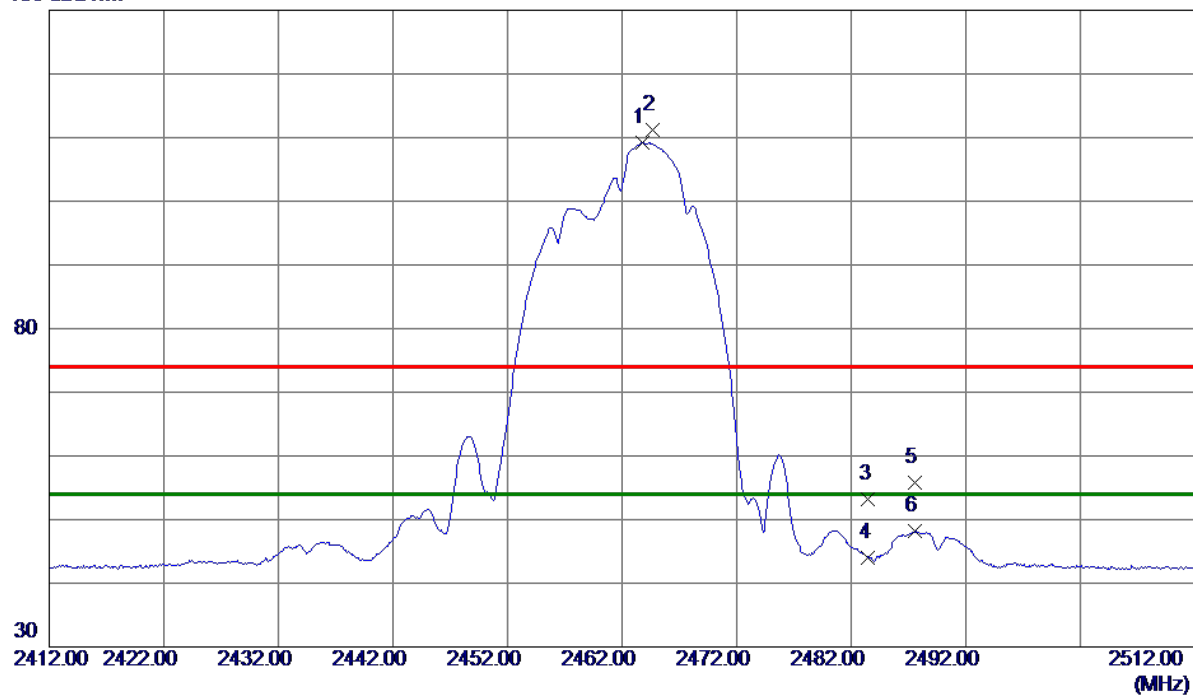


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2463.8000	101.23	7.95	109.18	54.00	55.18	AVG	No Limit
2	2464.7000	103.25	7.96	111.21	74.00	37.21	Peak	No Limit
3	2483.5000	45.28	8.00	53.28	74.00	-20.72	Peak	
4	2483.5000	36.07	8.00	44.07	54.00	-9.93	AVG	
5	2487.6000	47.87	8.01	55.88	74.00	-18.12	Peak	
6	2487.6000	40.16	8.01	48.17	54.00	-5.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

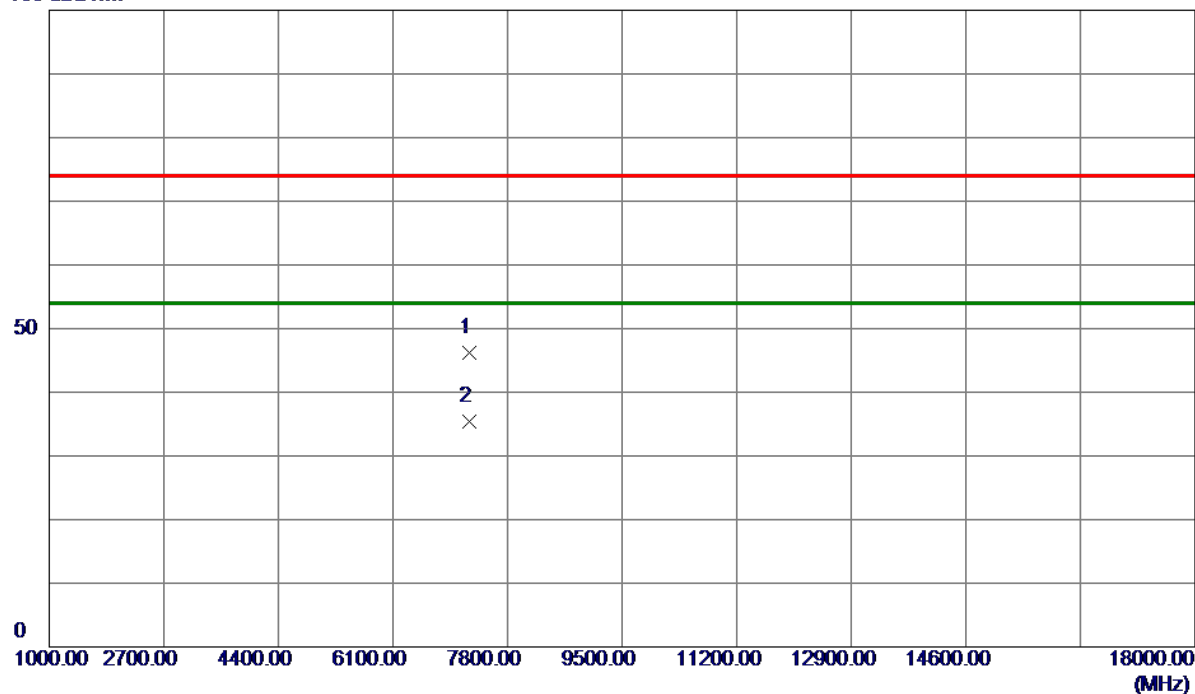


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7230.5000	36.51	9.61	46.12	74.00	-27.88	Peak	
2 *	7230.9000	25.79	9.61	35.40	54.00	-18.60	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

130 dBuV/m

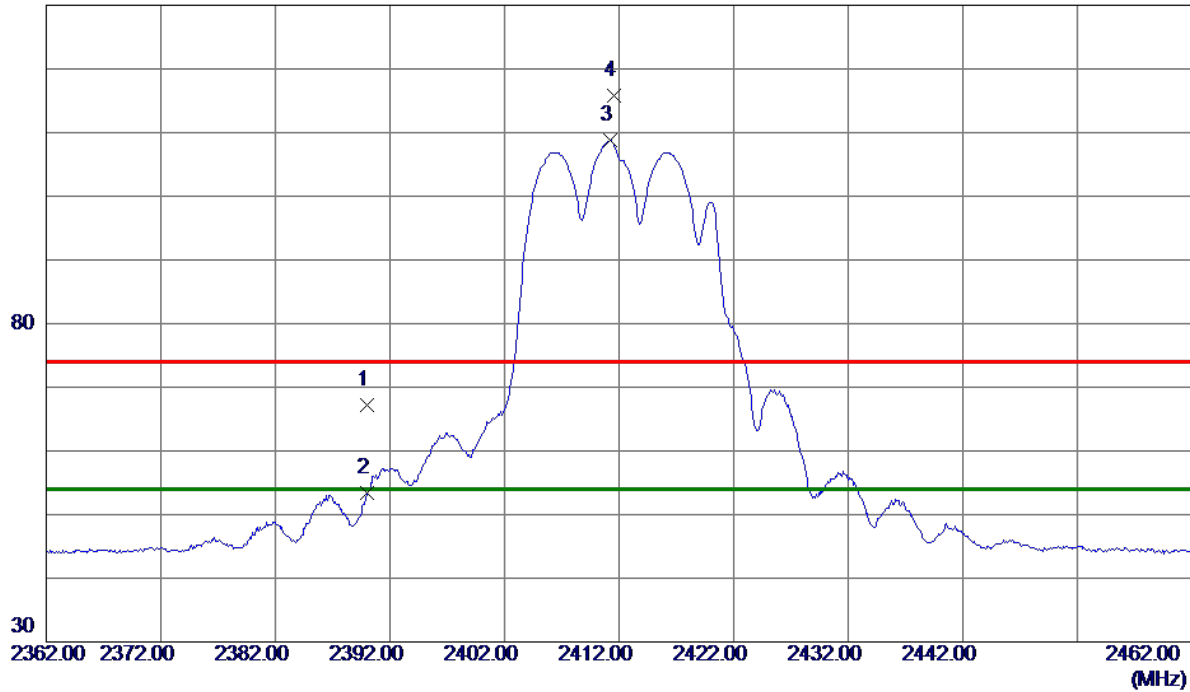

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	59.47	7.78	67.25	74.00	-6.75	Peak	
2	2390.0000	45.60	7.78	53.38	54.00	-0.62	AVG	
3 *	2411.2000	100.90	7.83	108.73	54.00	54.73	AVG	No Limit
4	2411.6000	107.97	7.83	115.80	74.00	41.80	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2417 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

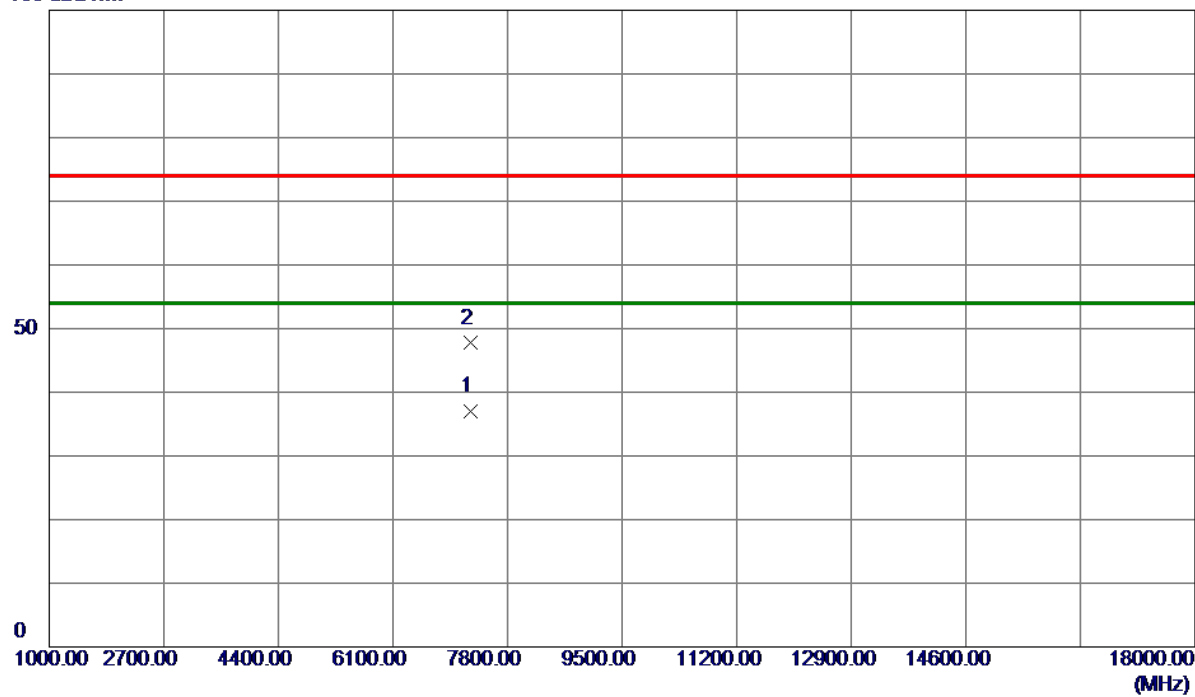


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7251.5000	27.35	9.59	36.94	54.00	-17.06	AVG	
2	7257.2000	38.11	9.59	47.70	74.00	-26.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2417 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

130 dBuV/m

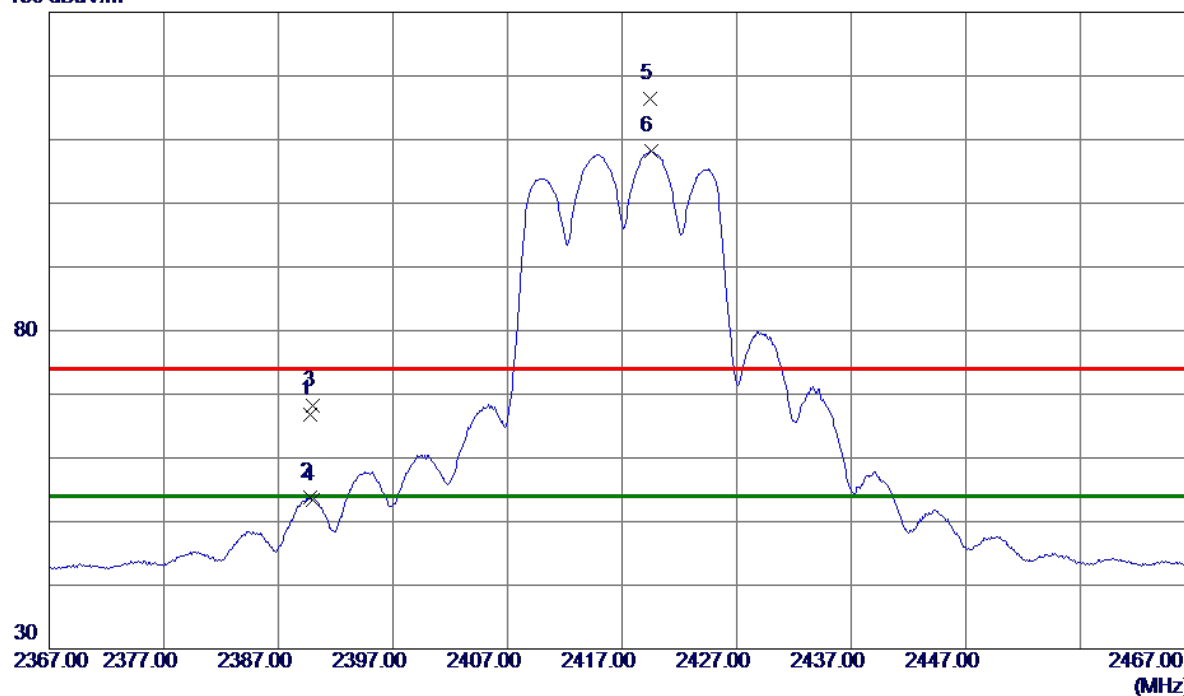


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.8000	58.95	7.78	66.73	74.00	-7.27	Peak	
2	2389.8000	45.94	7.78	53.72	54.00	-0.28	AVG	
3	2390.0000	60.42	7.78	68.20	74.00	-5.80	Peak	
4	2390.0000	45.65	7.78	53.43	54.00	-0.57	AVG	
5	2419.4000	108.53	7.85	116.38	74.00	42.38	Peak	No Limit
6 *	2419.5000	100.31	7.85	108.16	54.00	54.16	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

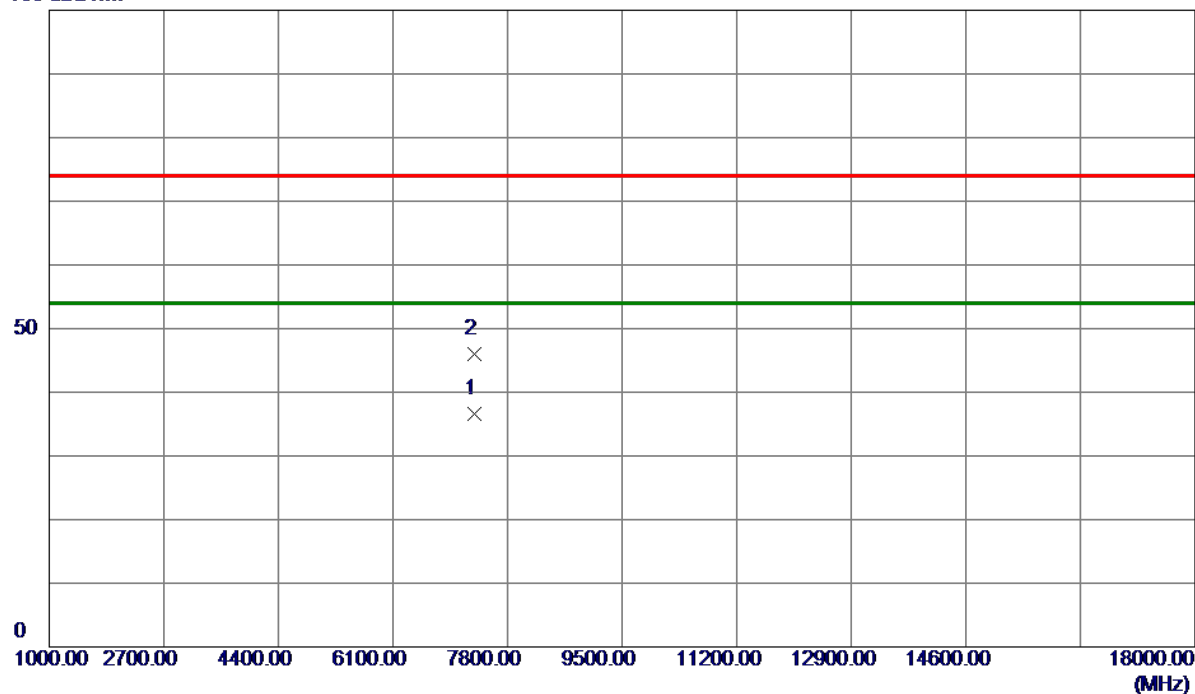


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7310.8500	26.96	9.55	36.51	54.00	-17.49	AVG	
2	7316.0000	36.40	9.54	45.94	74.00	-28.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

130 dBuV/m

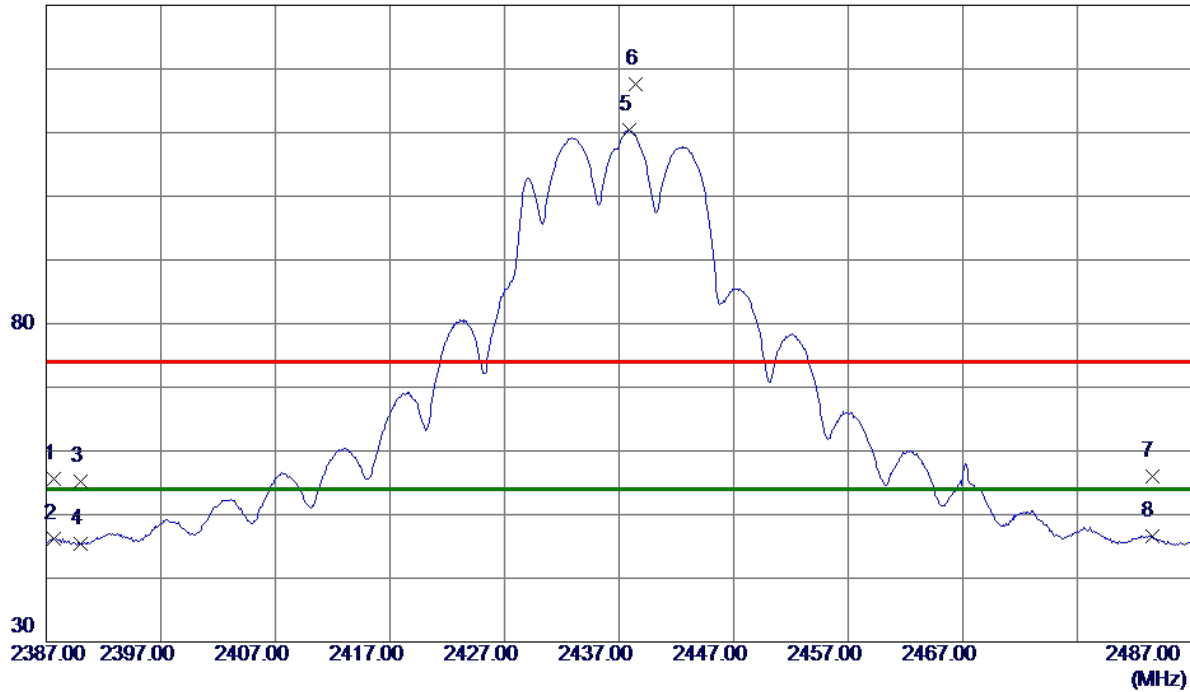

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2387.7000	47.86	7.77	55.63	74.00	-18.37	Peak	
2	2387.7000	38.46	7.77	46.23	54.00	-7.77	AVG	
3	2390.0000	47.36	7.78	55.14	74.00	-18.86	Peak	
4	2390.0000	37.58	7.78	45.36	54.00	-8.64	AVG	
5 *	2437.9000	102.51	7.89	110.40	54.00	56.40	AVG	No Limit
6	2438.4000	109.73	7.89	117.62	74.00	43.62	Peak	No Limit
7	2483.5000	47.98	8.00	55.98	74.00	-18.02	Peak	
8	2483.5000	38.55	8.00	46.55	54.00	-7.45	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2457 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

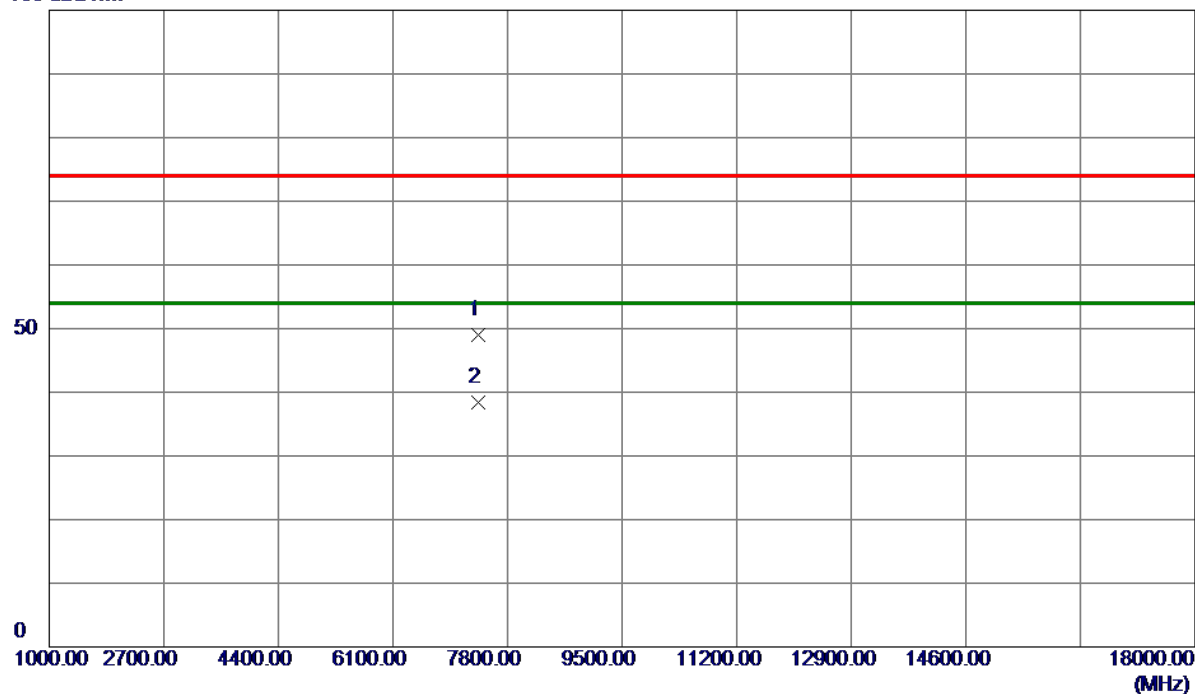


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7369.2000	39.49	9.50	48.99	74.00	-25.01	Peak	
2 *	7369.4500	28.94	9.50	38.44	54.00	-15.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2457 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

130 dBuV/m

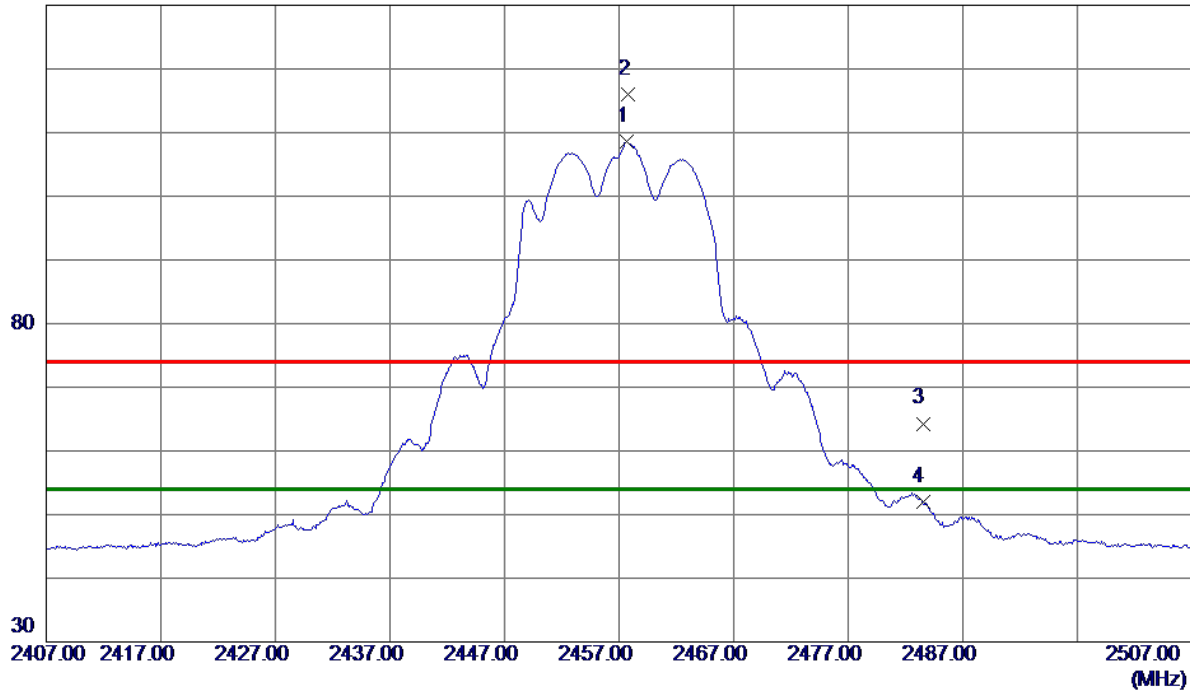

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2457.7000	100.58	7.94	108.52	54.00	54.52	AVG	No Limit
2	2457.8000	108.13	7.94	116.07	74.00	42.07	Peak	No Limit
3	2483.5000	56.30	8.00	64.30	74.00	-9.70	Peak	
4	2483.5000	43.95	8.00	51.95	54.00	-2.05	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

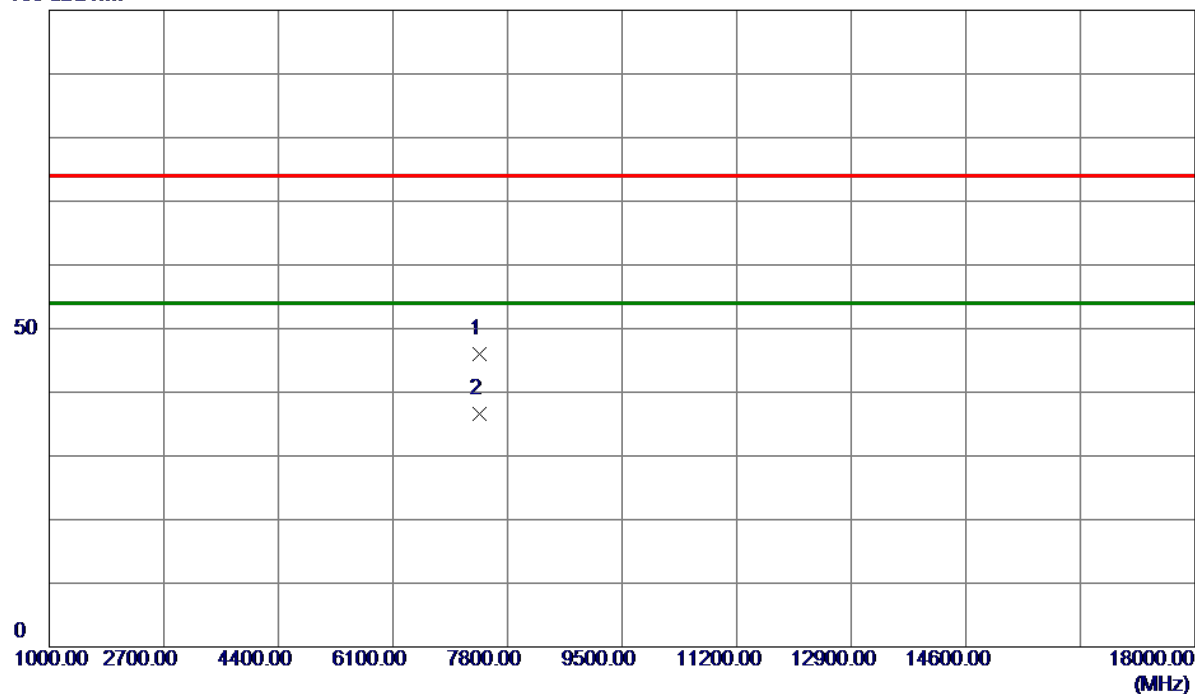


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7382.0000	36.46	9.49	45.95	74.00	-28.05	Peak	
2 *	7385.7000	27.13	9.49	36.62	54.00	-17.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

130 dBuV/m

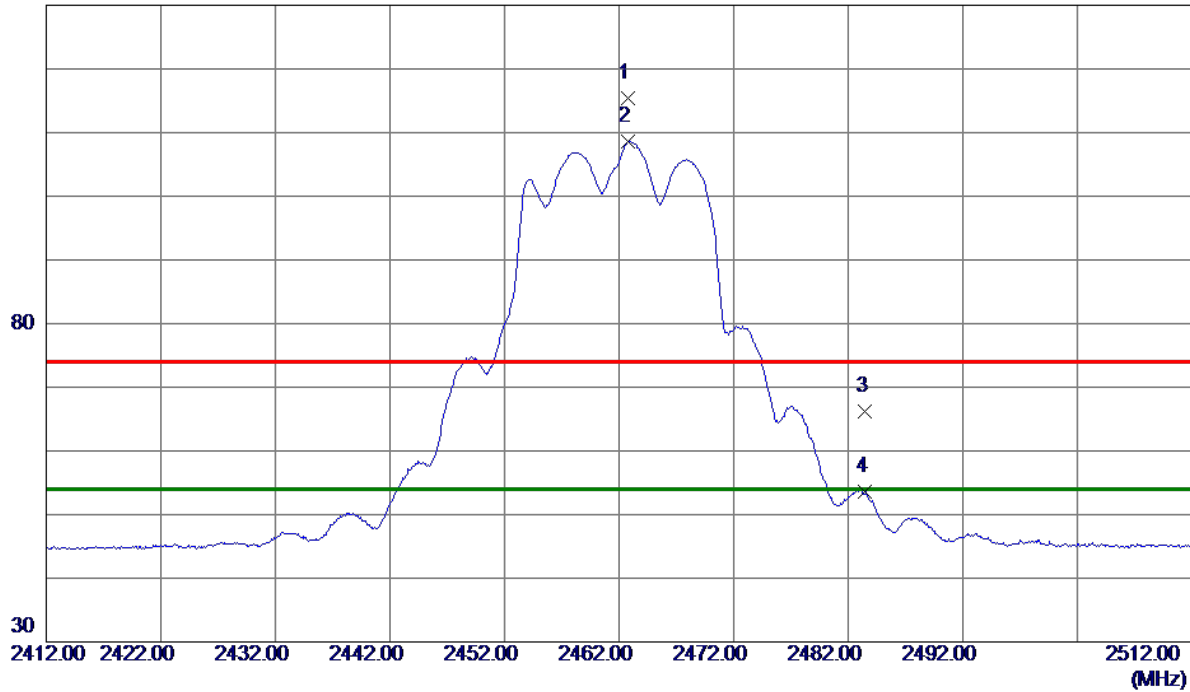

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2462.8000	107.36	7.95	115.31	74.00	41.31	Peak	No Limit
2 *	2462.8000	100.60	7.95	108.55	54.00	54.55	AVG	No Limit
3	2483.5000	58.11	8.00	66.11	74.00	-7.89	Peak	
4	2483.5000	45.59	8.00	53.59	54.00	-0.41	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2412 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

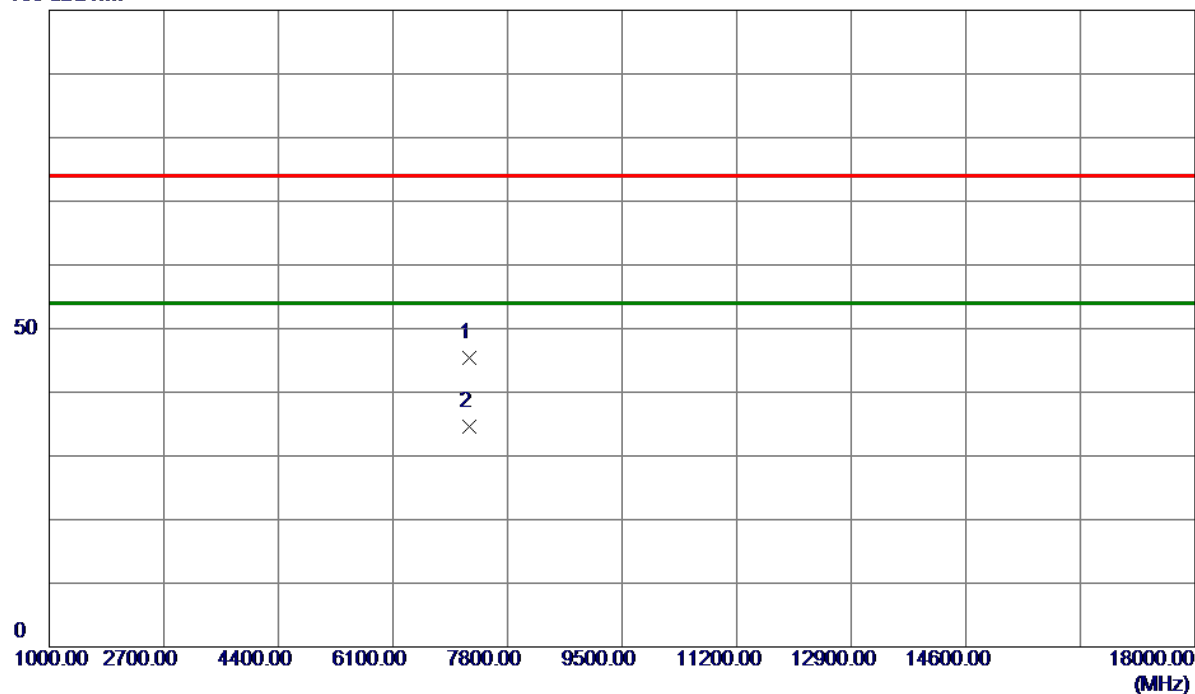


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7224.1000	35.80	9.61	45.41	74.00	-28.59	Peak	
2 *	7229.2000	24.95	9.61	34.56	54.00	-19.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

130 dBuV/m

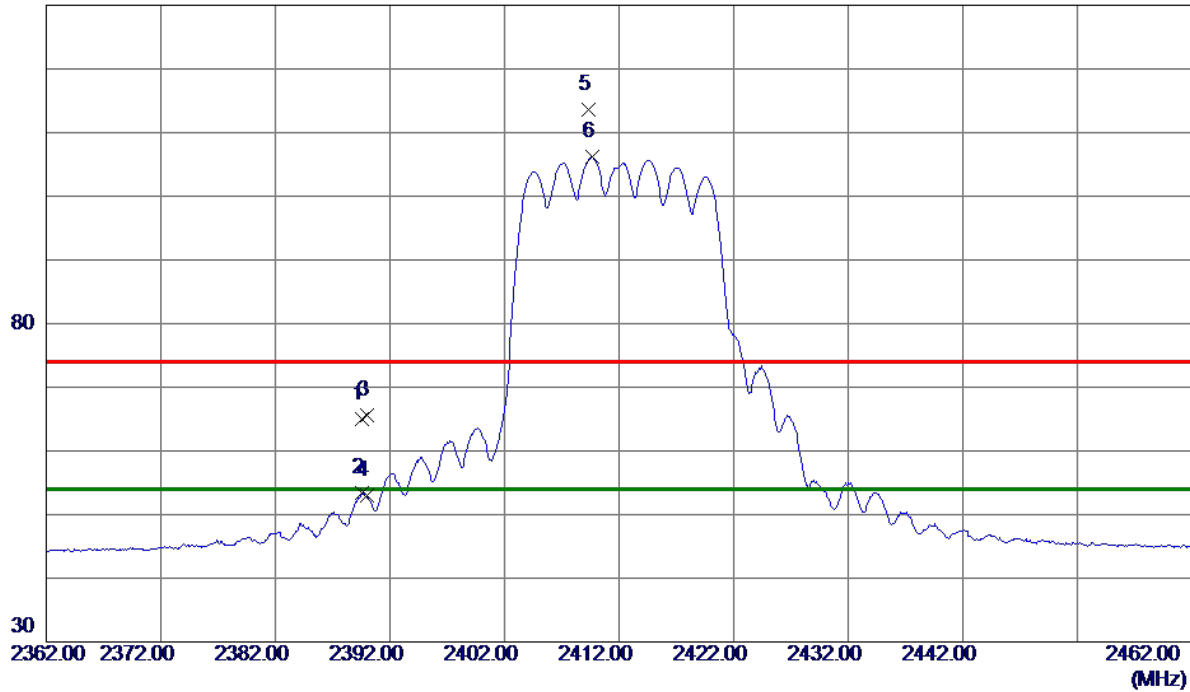

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.6000	57.25	7.78	65.03	74.00	-8.97	Peak	
2	2389.6000	45.70	7.78	53.48	54.00	-0.52	AVG	
3	2390.0000	57.82	7.78	65.60	74.00	-8.40	Peak	
4	2390.0000	45.15	7.78	52.93	54.00	-1.07	AVG	
5	2409.3000	105.86	7.82	113.68	74.00	39.68	Peak	No Limit
6 *	2409.7000	98.36	7.82	106.18	54.00	52.18	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2417 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

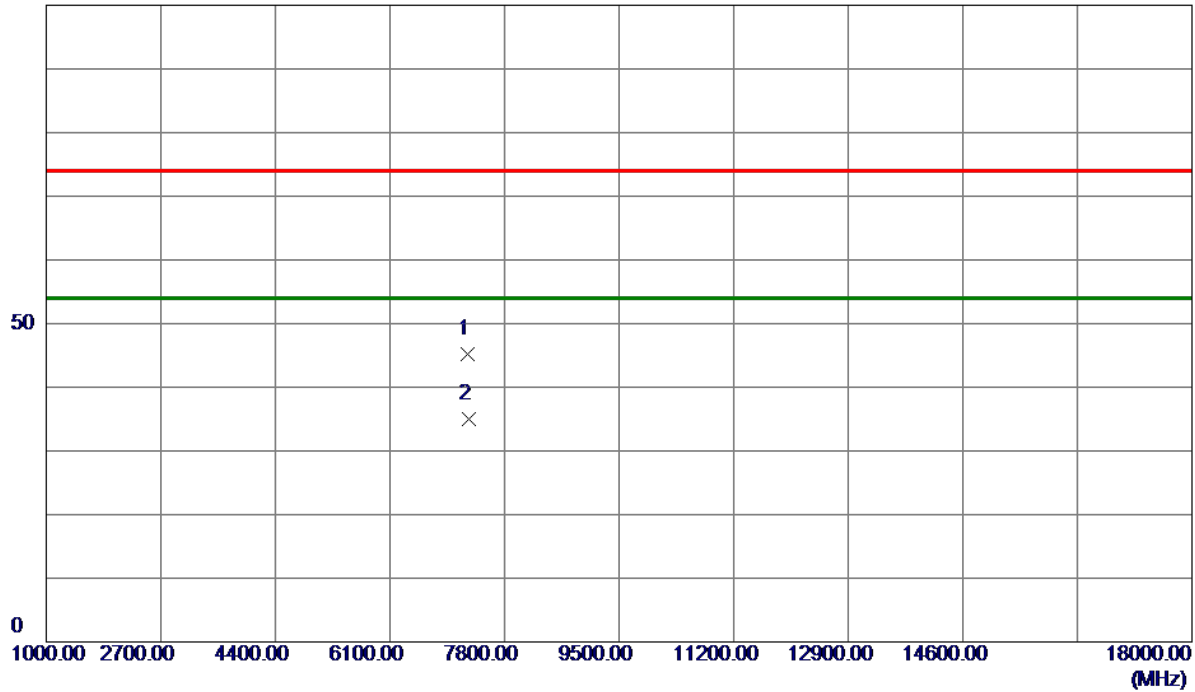

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7258.0000	35.53	9.59	45.12	74.00	-28.88	Peak	
2 *	7264.0500	25.51	9.58	35.09	54.00	-18.91	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2417 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

130 dBuV/m

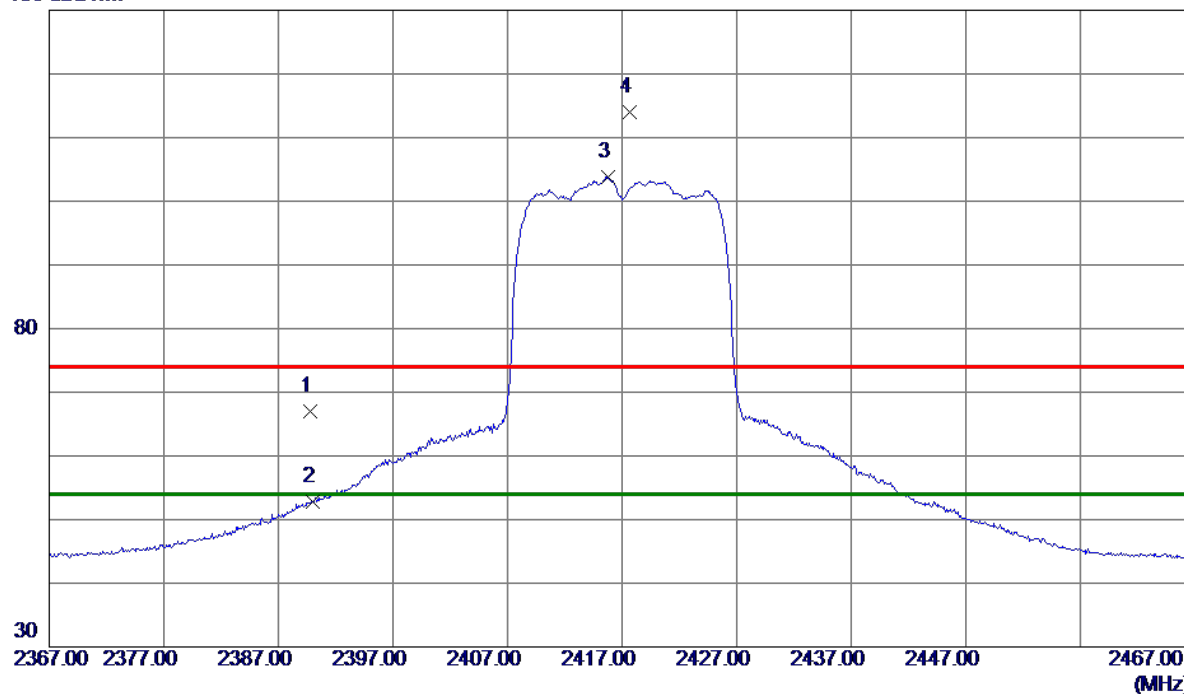


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.8000	59.16	7.78	66.94	74.00	-7.06	Peak	
2	2390.0000	44.95	7.78	52.73	54.00	-1.27	AVG	
3 *	2415.8000	96.03	7.84	103.87	54.00	49.87	AVG	No Limit
4	2417.7000	106.17	7.84	114.01	74.00	40.01	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

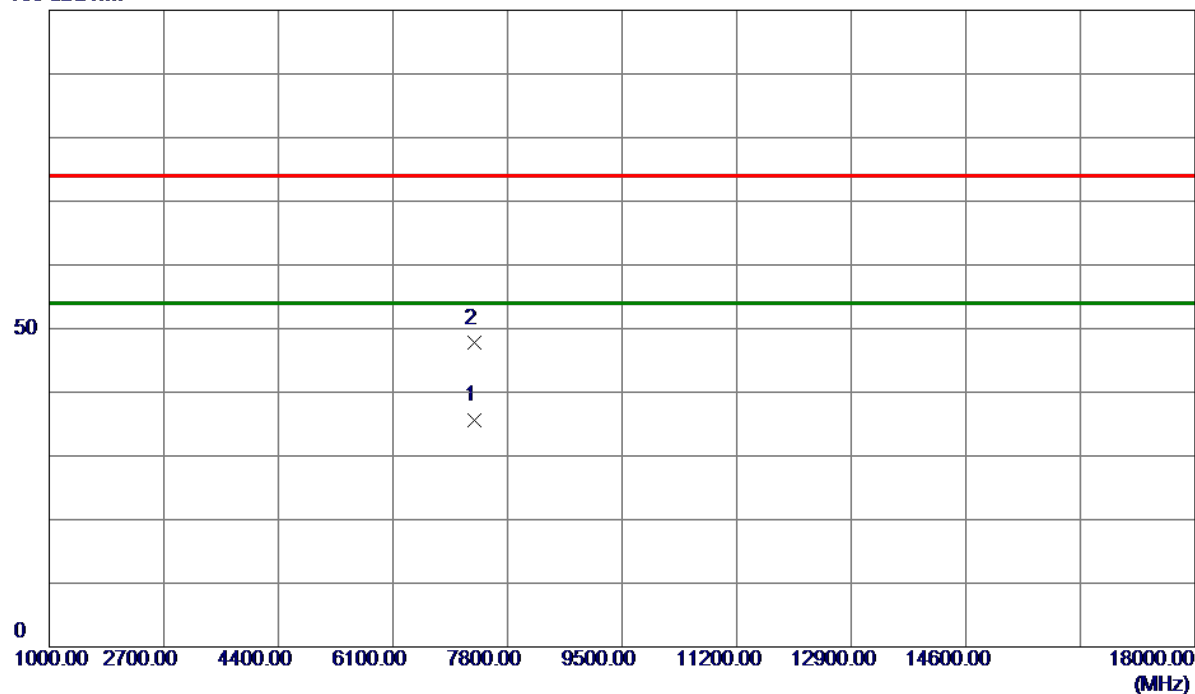


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7313.8400	26.03	9.54	35.57	54.00	-18.43	AVG	
2	7316.4200	38.16	9.54	47.70	74.00	-26.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

130 dBuV/m

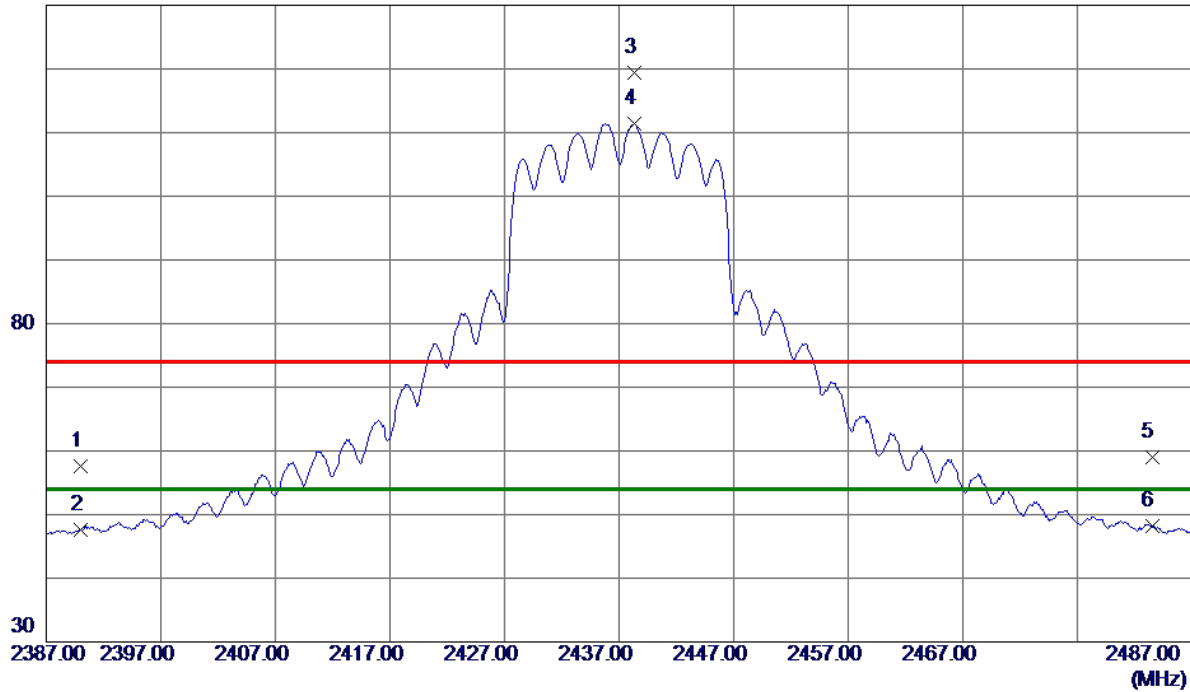

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	49.78	7.78	57.56	74.00	-16.44	Peak	
2	2390.0000	39.80	7.78	47.58	54.00	-6.42	AVG	
3	2438.3000	111.49	7.89	119.38	74.00	45.38	Peak	No Limit
4 *	2438.3000	103.51	7.89	111.40	54.00	57.40	AVG	No Limit
5	2483.5000	50.96	8.00	58.96	74.00	-15.04	Peak	
6	2483.5000	40.16	8.00	48.16	54.00	-5.84	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2457 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

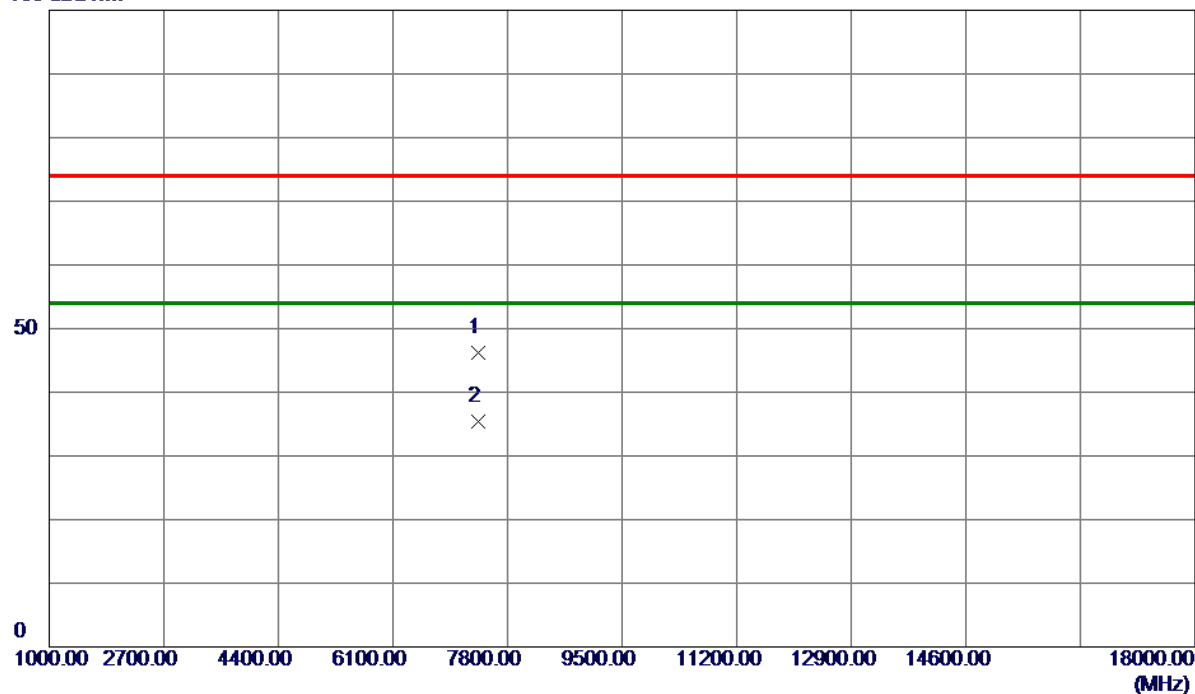


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7364.0200	36.65	9.51	46.16	74.00	-27.84	Peak	
2 *	7368.2000	25.96	9.50	35.46	54.00	-18.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2457 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

130 dBuV/m

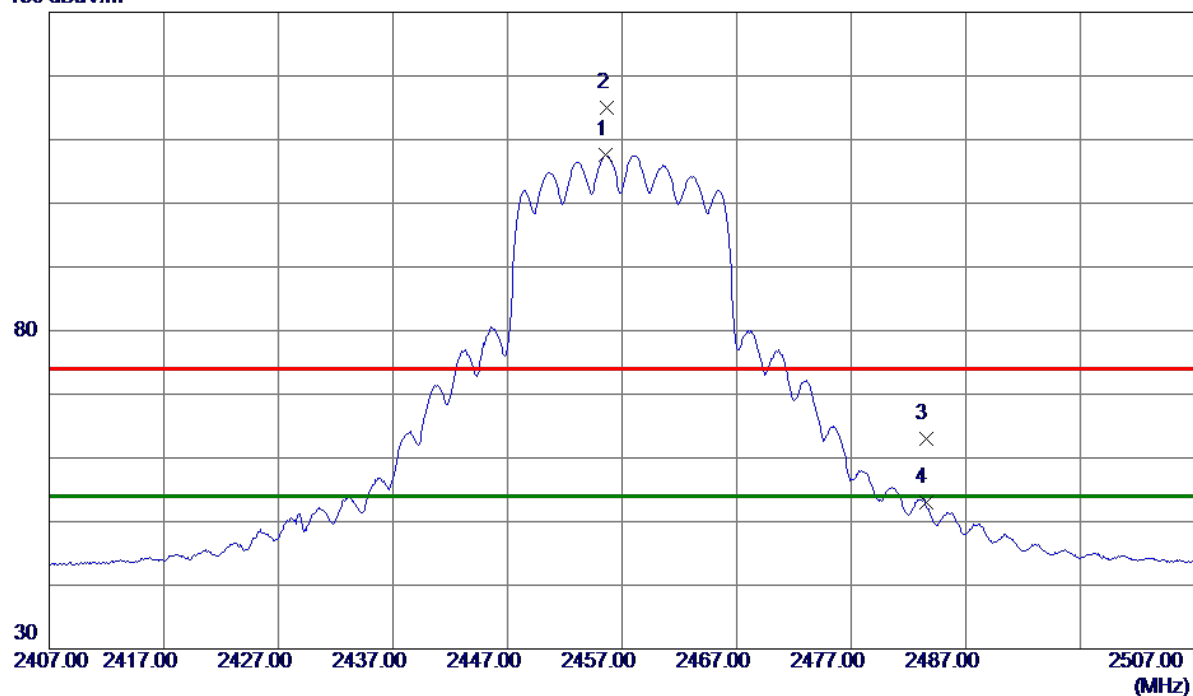


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2455.6000	99.60	7.93	107.53	54.00	53.53	AVG	No Limit
2	2455.7000	106.98	7.93	114.91	74.00	40.91	Peak	No Limit
3	2483.5000	54.97	8.00	62.97	74.00	-11.03	Peak	
4	2483.5000	44.98	8.00	52.98	54.00	-1.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2462 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

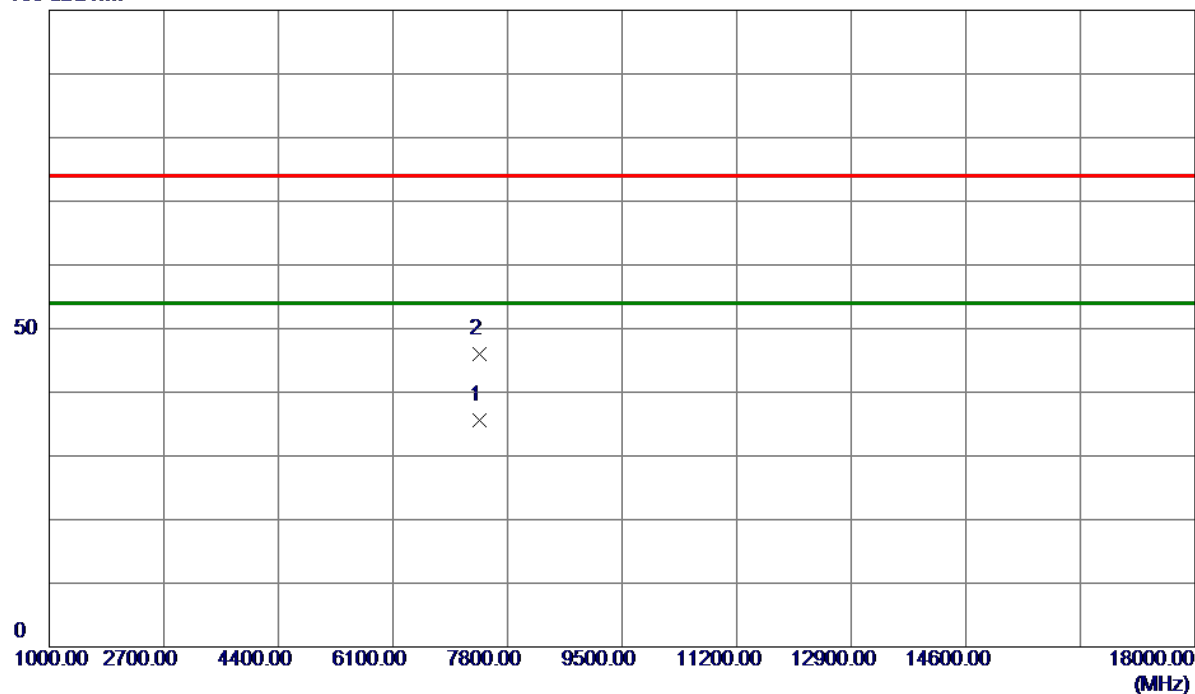


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7382.1000	26.12	9.49	35.61	54.00	-18.39	AVG	
2	7384.5000	36.44	9.49	45.93	74.00	-28.07	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

130 dBuV/m

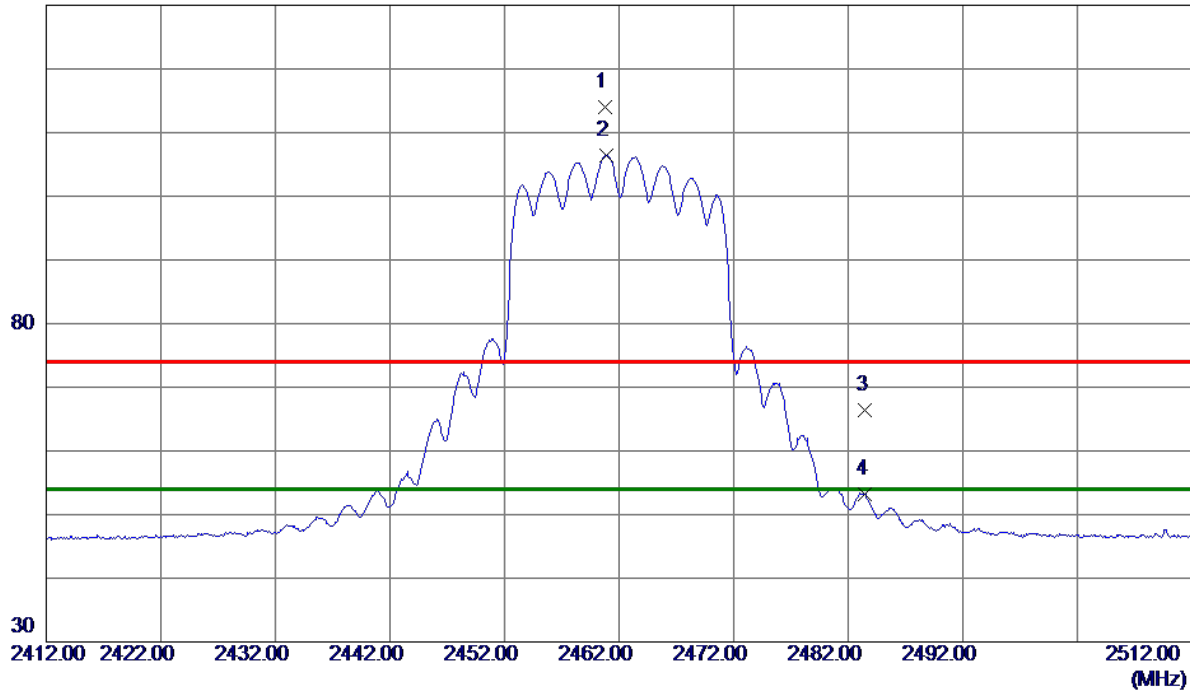

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2460.8000	106.05	7.95	114.00	74.00	40.00	Peak	No Limit
2 *	2460.9000	98.39	7.95	106.34	54.00	52.34	AVG	No Limit
3	2483.5000	58.48	8.00	66.48	74.00	-7.52	Peak	
4	2483.5000	45.13	8.00	53.13	54.00	-0.87	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2422 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

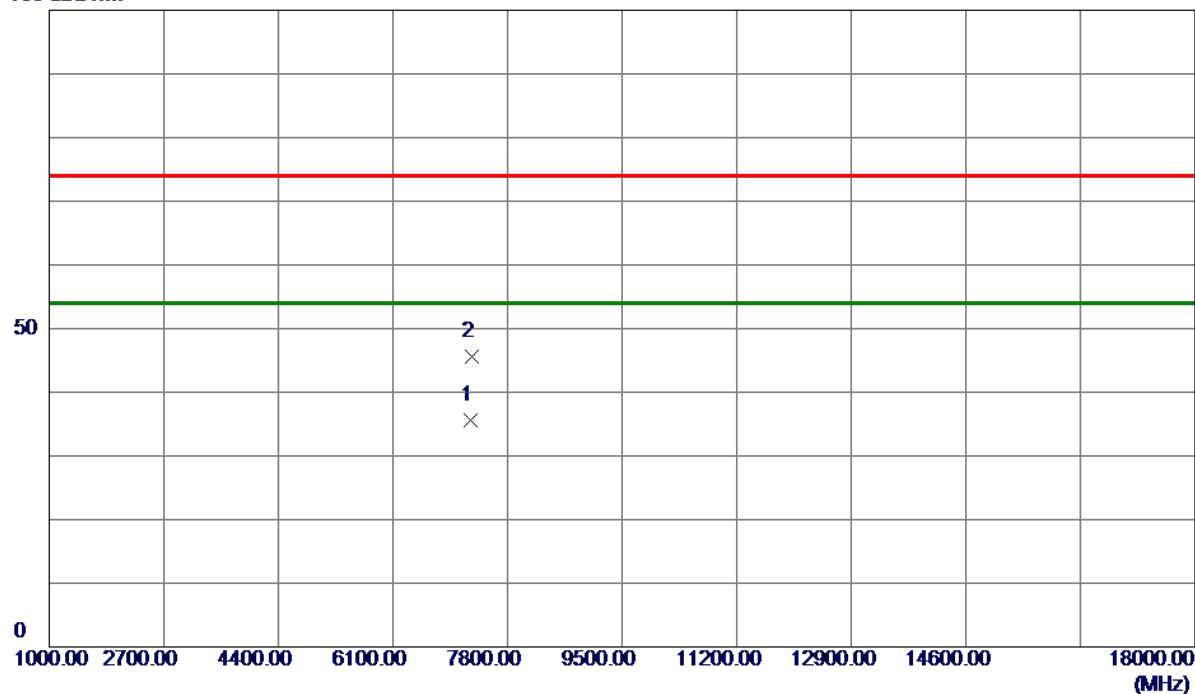


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7260.4000	26.09	9.58	35.67	54.00	-18.33	AVG	
2	7269.9000	36.05	9.58	45.63	74.00	-28.37	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2422 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

130 dBuV/m

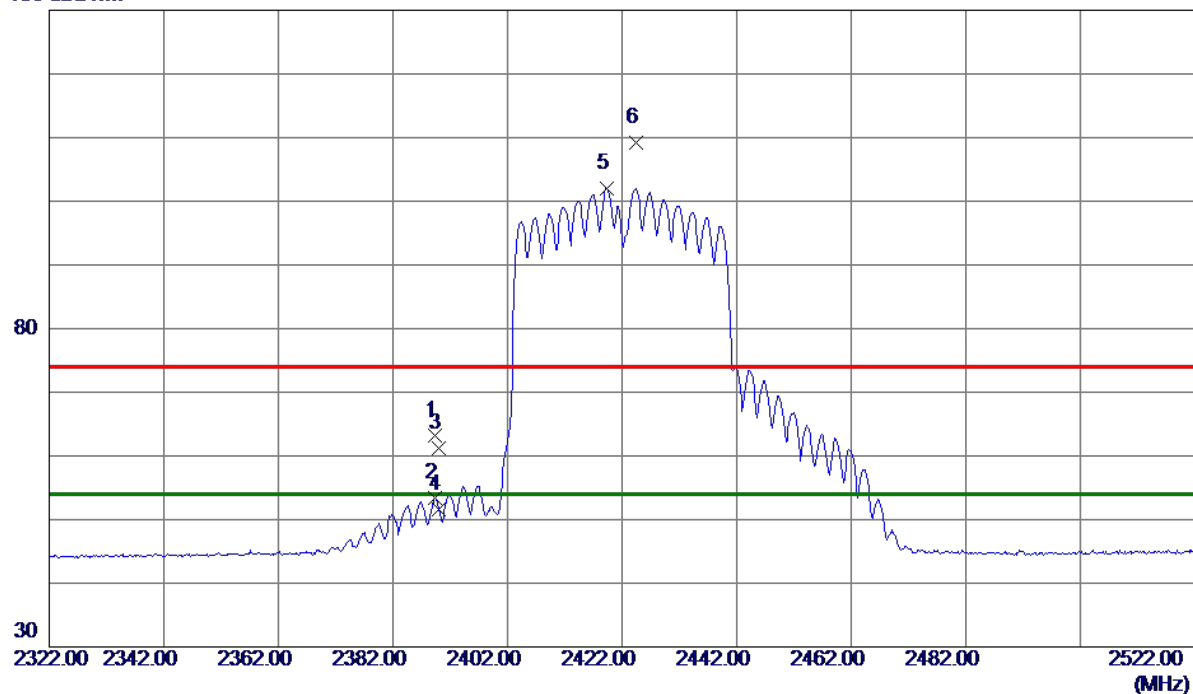


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.4000	55.51	7.77	63.28	74.00	-10.72	Peak	
2	2389.4000	45.64	7.77	53.41	54.00	-0.59	AVG	
3	2390.0000	53.33	7.78	61.11	74.00	-12.89	Peak	
4	2390.0000	43.89	7.78	51.67	54.00	-2.33	AVG	
5 *	2419.4000	94.18	7.85	102.03	54.00	48.03	AVG	No Limit
6	2424.4000	101.41	7.86	109.27	74.00	35.27	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2427 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

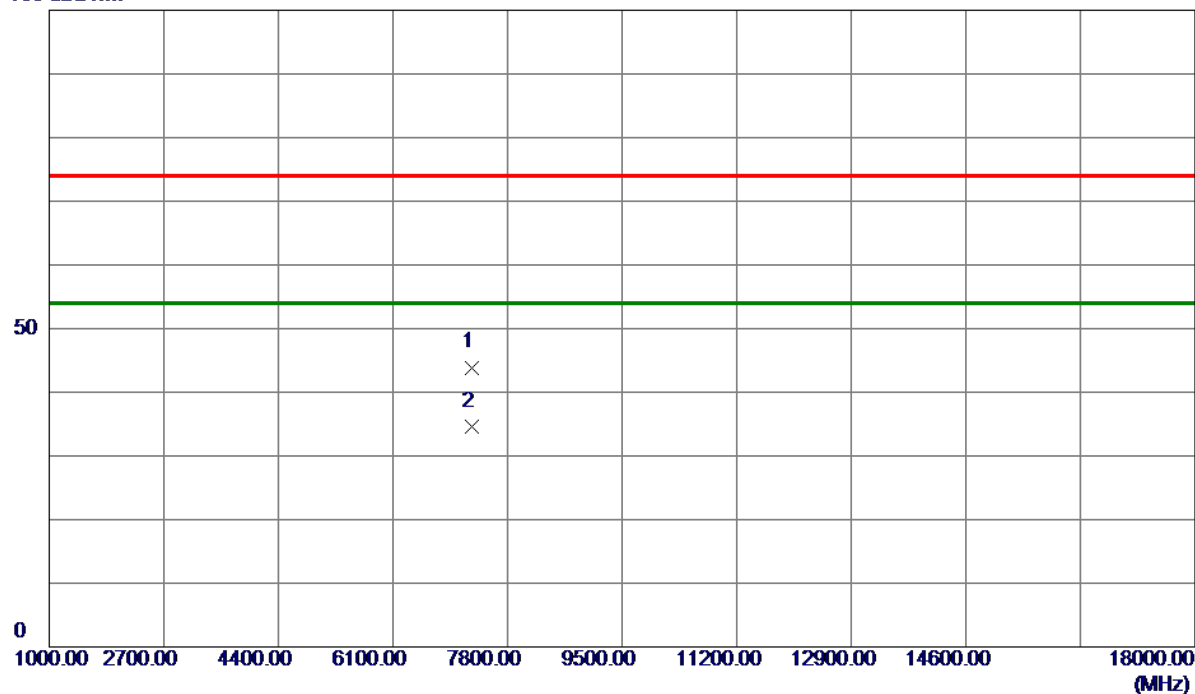


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7270.6000	34.32	9.58	43.90	74.00	-30.10	Peak	
2 *	7271.3000	24.96	9.58	34.54	54.00	-19.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2427 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

130 dBuV/m

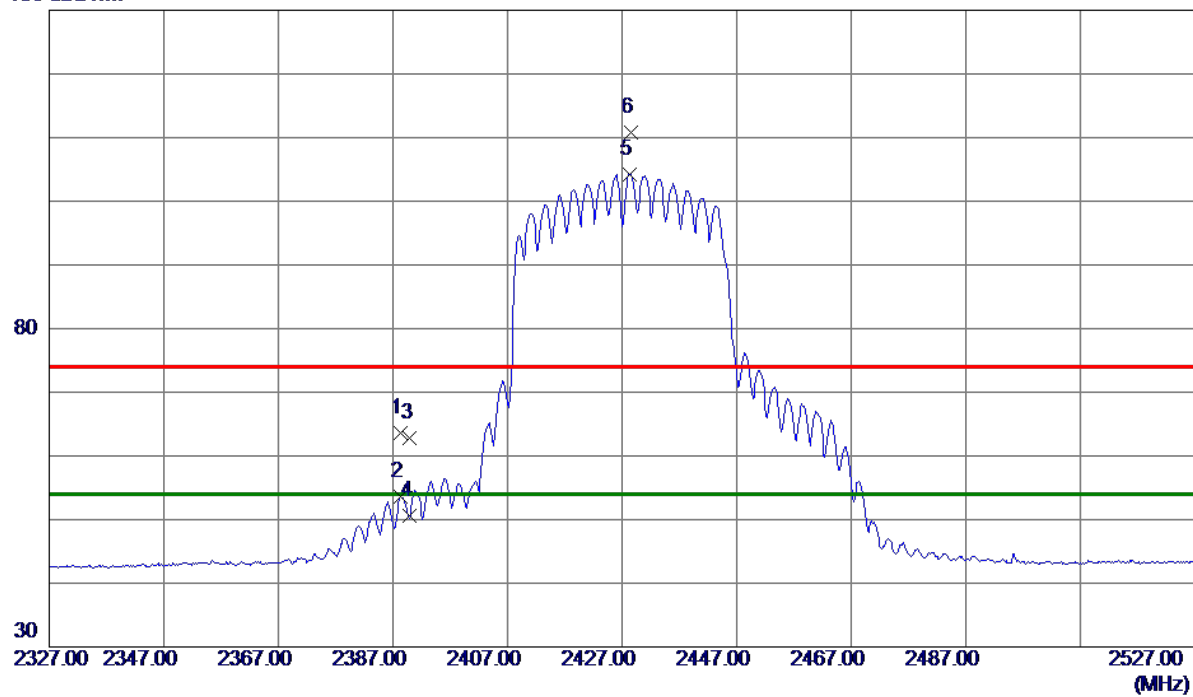


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2388.4000	55.80	7.77	63.57	74.00	-10.43	Peak	
2	2388.4000	45.74	7.77	53.51	54.00	-0.49	AVG	
3	2390.0000	55.00	7.78	62.78	74.00	-11.22	Peak	
4	2390.0000	42.91	7.78	50.69	54.00	-3.31	AVG	
5 *	2428.4000	96.34	7.87	104.21	54.00	50.21	AVG	No Limit
6	2428.6000	102.90	7.87	110.77	74.00	36.77	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

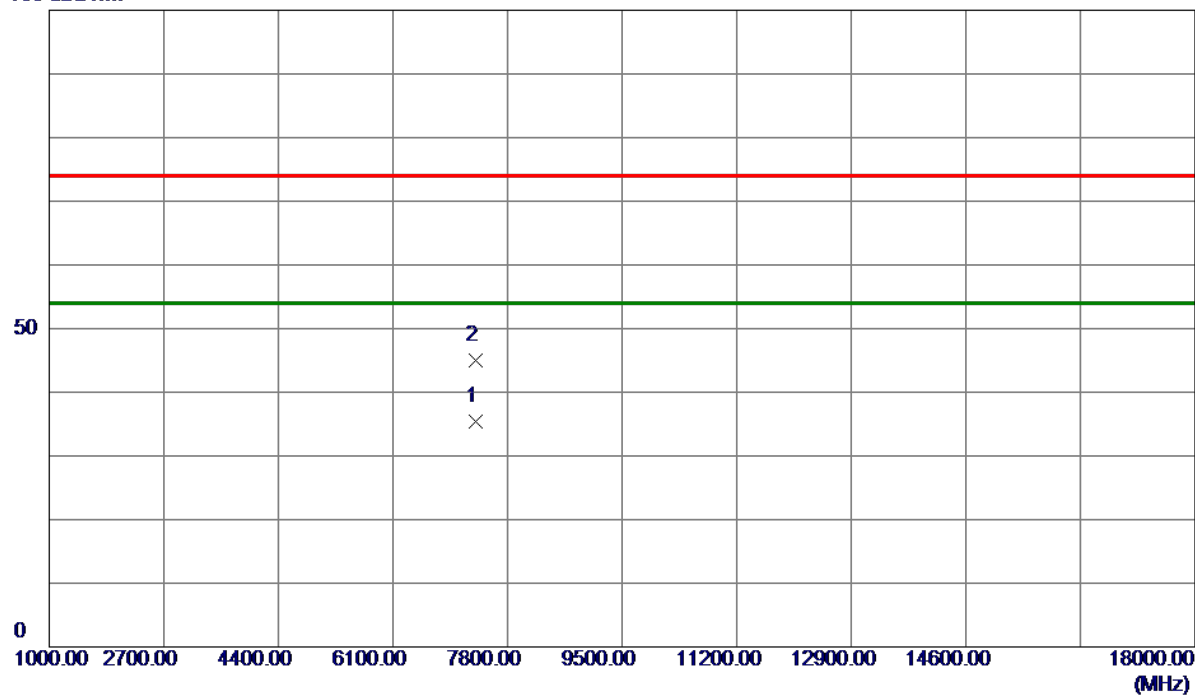


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7321.1000	25.78	9.54	35.32	54.00	-18.68	AVG	
2	7326.6000	35.52	9.54	45.06	74.00	-28.94	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

130 dBuV/m

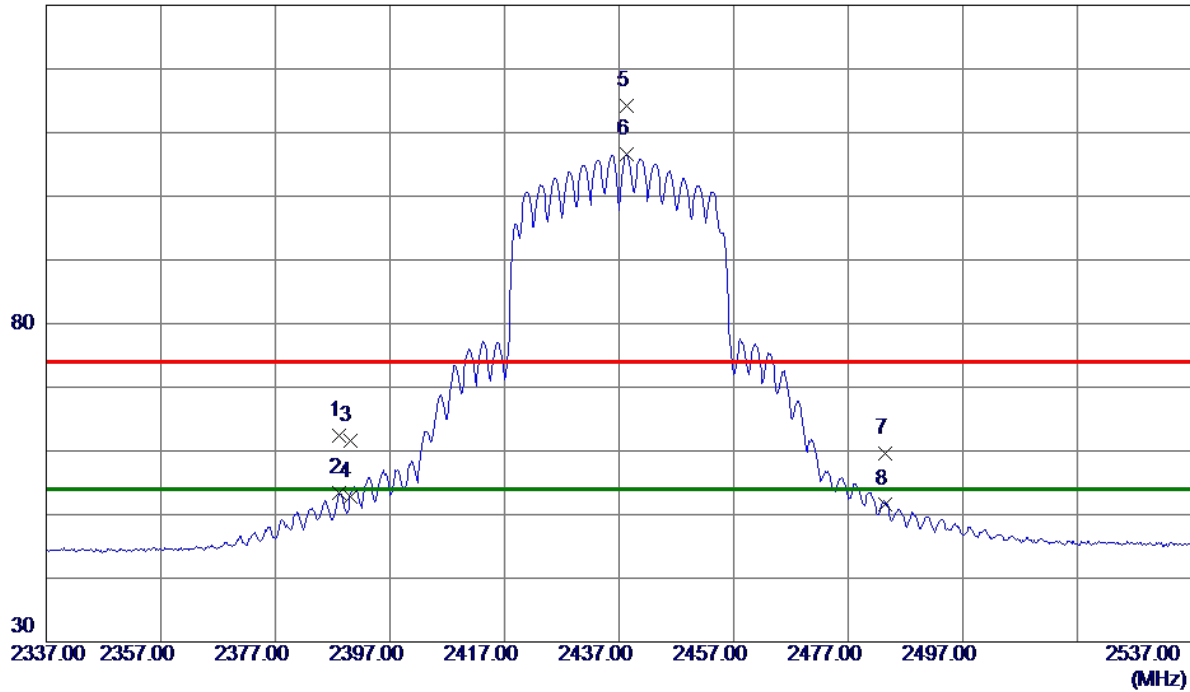

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2388.2000	54.59	7.77	62.36	74.00	-11.64	Peak	
2	2388.2000	45.60	7.77	53.37	54.00	-0.63	AVG	
3	2390.0000	53.83	7.78	61.61	74.00	-12.39	Peak	
4	2390.0000	45.03	7.78	52.81	54.00	-1.19	AVG	
5	2438.4000	106.26	7.89	114.15	74.00	40.15	Peak	No Limit
6 *	2438.4000	98.64	7.89	106.53	54.00	52.53	AVG	No Limit
7	2483.5000	51.61	8.00	59.61	74.00	-14.39	Peak	
8	2483.5000	43.61	8.00	51.61	54.00	-2.39	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2447 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

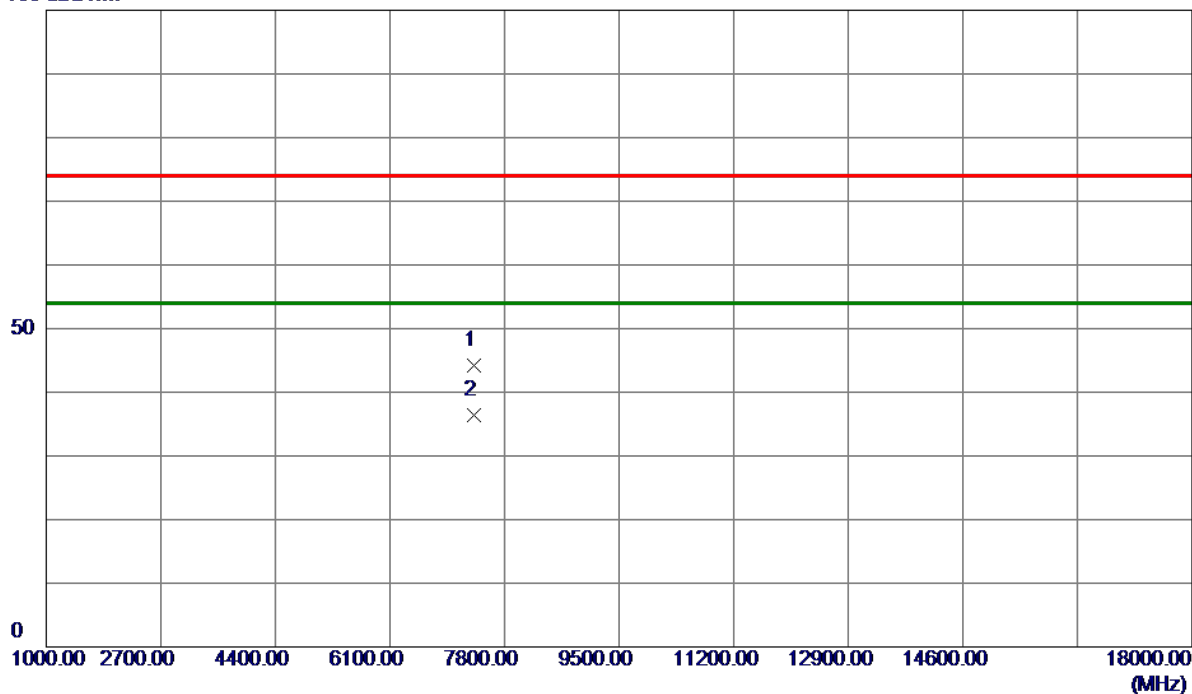


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7340.3000	34.74	9.52	44.26	74.00	-29.74	Peak	
2 *	7349.4000	26.95	9.52	36.47	54.00	-17.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2447 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

130 dBuV/m

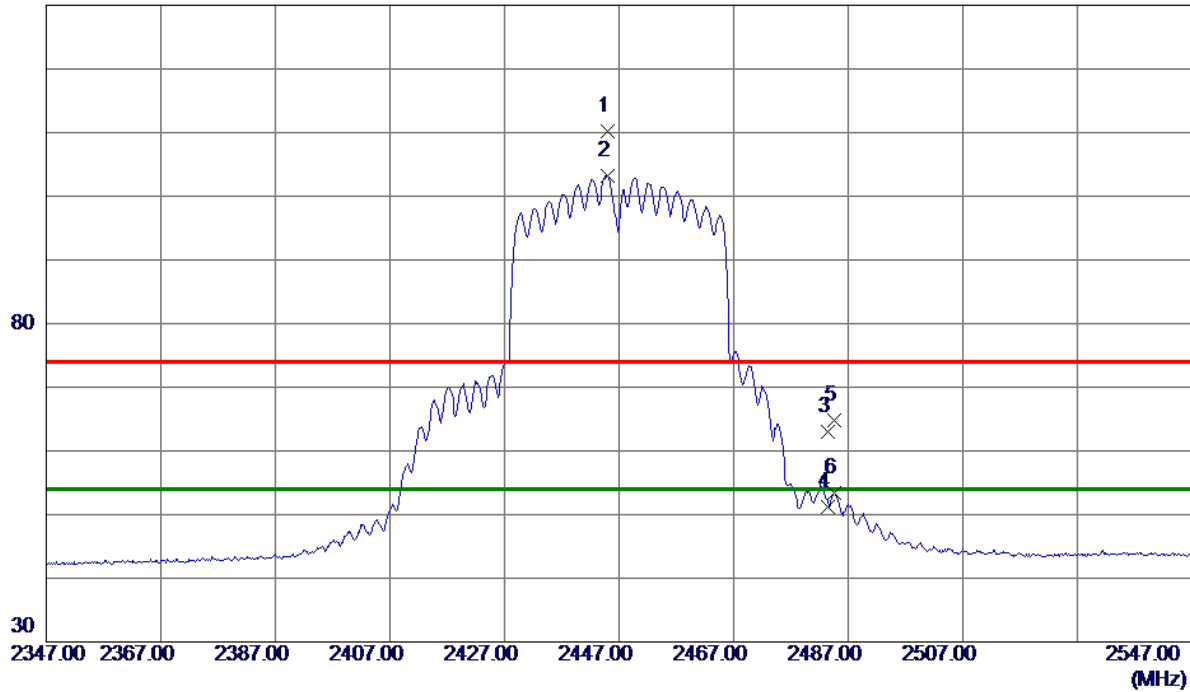

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2445.0000	102.36	7.91	110.27	74.00	36.27	Peak	No Limit
2 *	2445.0000	95.36	7.91	103.27	54.00	49.27	AVG	No Limit
3	2483.5000	54.99	8.00	62.99	74.00	-11.01	Peak	
4	2483.5000	43.26	8.00	51.26	54.00	-2.74	AVG	
5	2484.6000	56.79	8.00	64.79	74.00	-9.21	Peak	
6	2484.6000	45.33	8.00	53.33	54.00	-0.67	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2452 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

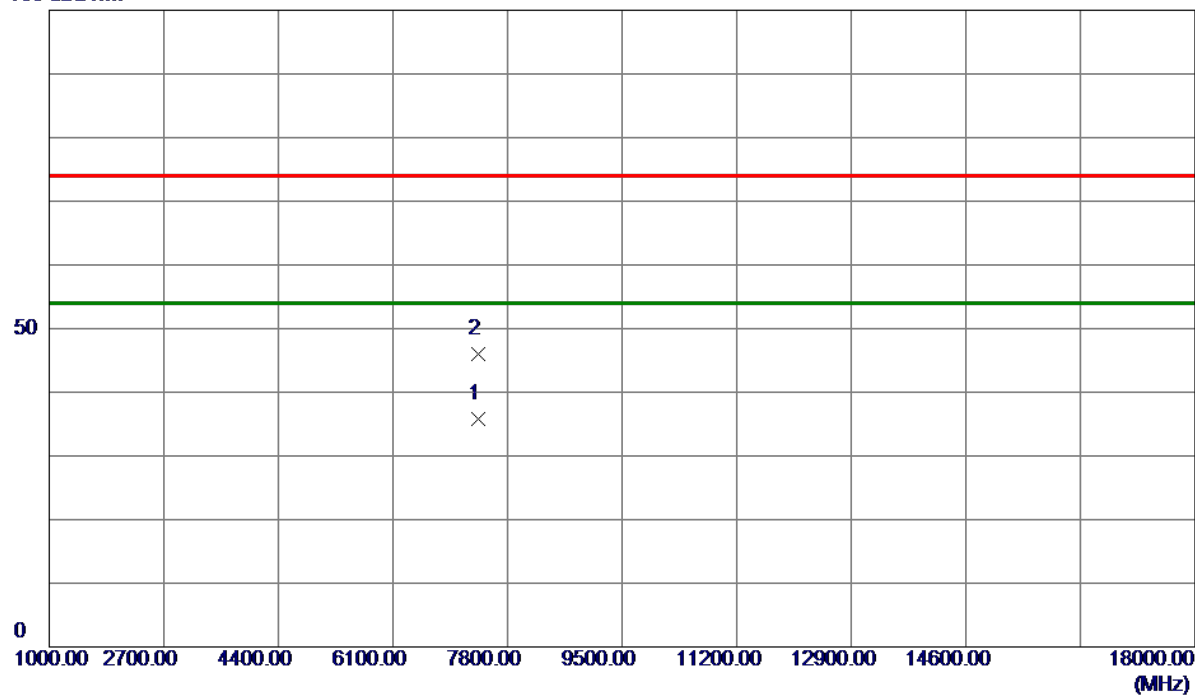


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7357.3000	26.30	9.51	35.81	54.00	-18.19	AVG	
2	7365.2000	36.50	9.51	46.01	74.00	-27.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2452 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

130 dBuV/m

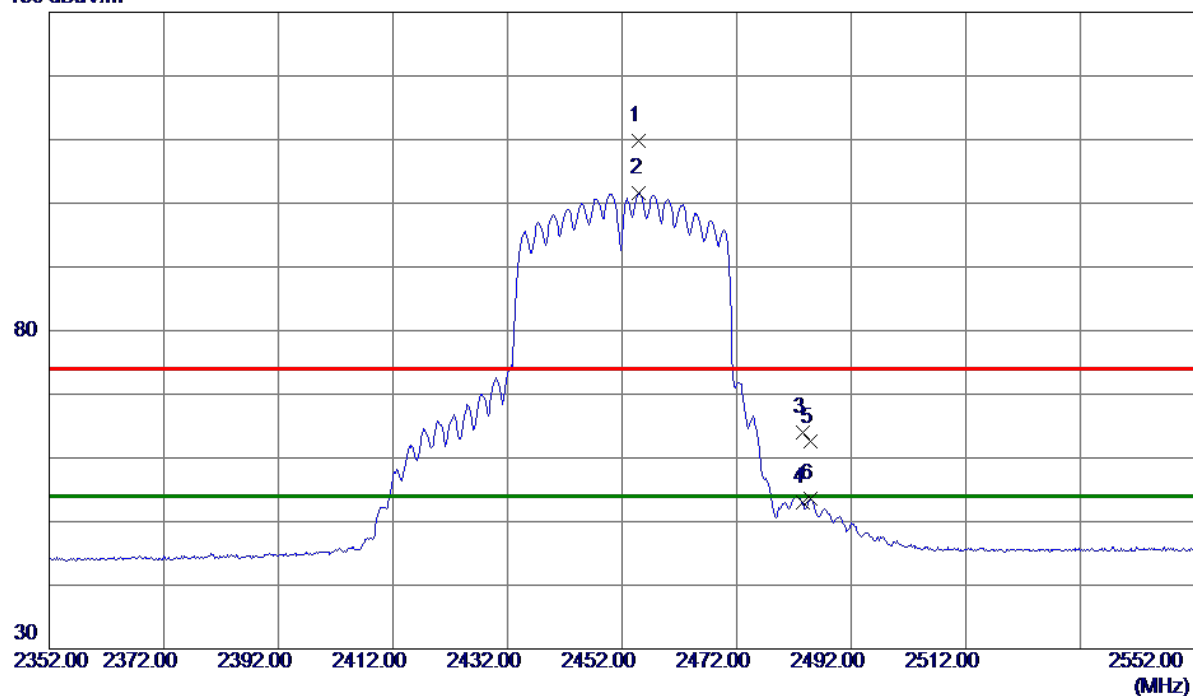


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2454.8000	101.91	7.93	109.84	74.00	35.84	Peak	No Limit
2 *	2455.0000	93.70	7.93	101.63	54.00	47.63	AVG	No Limit
3	2483.5000	56.04	8.00	64.04	74.00	-9.96	Peak	
4	2483.5000	44.91	8.00	52.91	54.00	-1.09	AVG	
5	2484.8000	54.50	8.00	62.50	74.00	-11.50	Peak	
6	2484.8000	45.66	8.00	53.66	54.00	-0.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode 2412 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

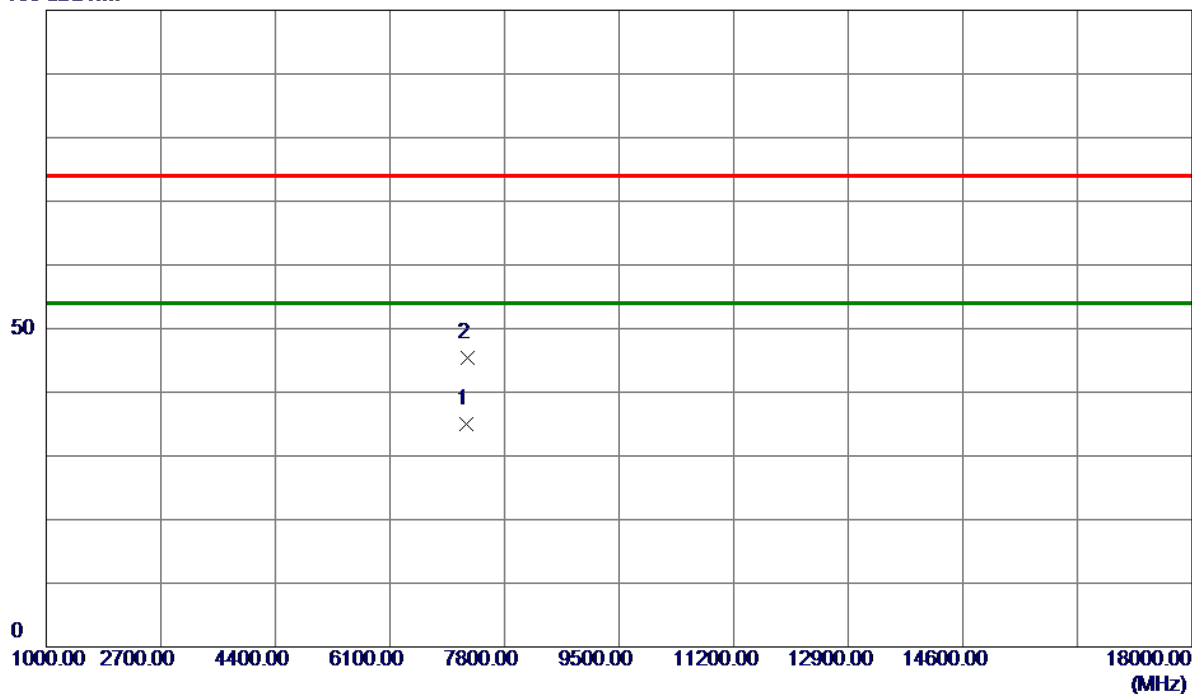


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7242.6000	25.42	9.60	35.02	54.00	-18.98	AVG	
2	7244.4000	35.83	9.60	45.43	74.00	-28.57	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode 2412 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

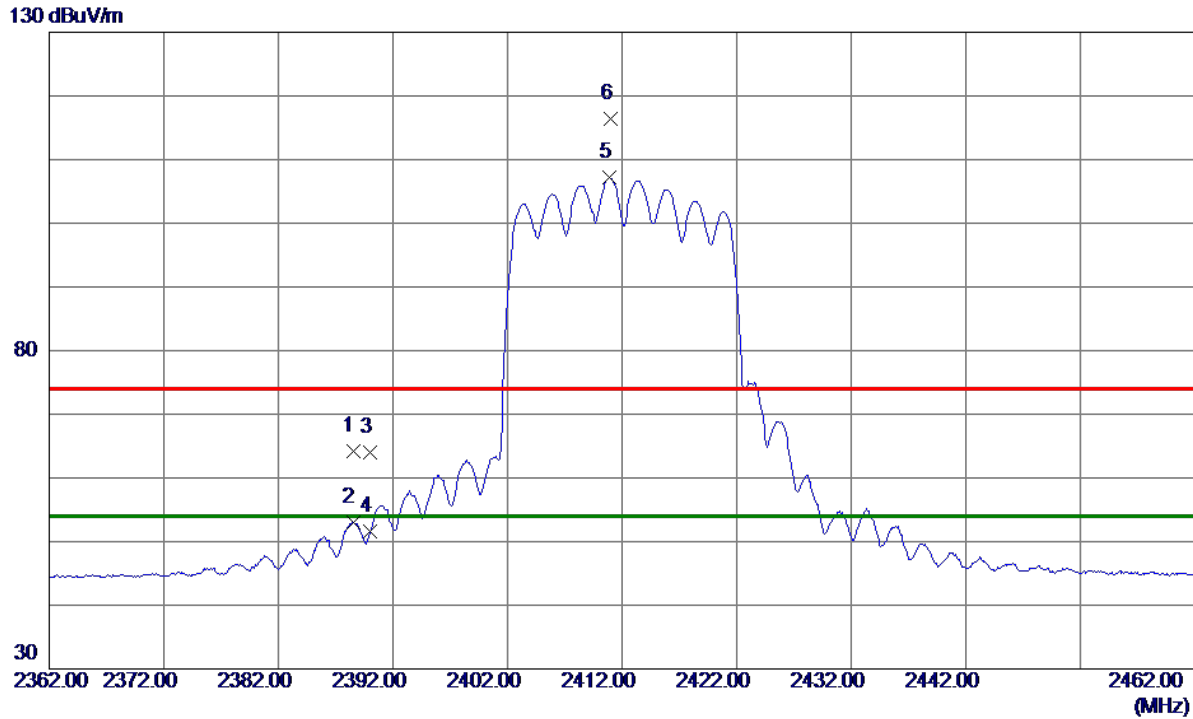

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2388.5000	56.45	7.77	64.22	74.00	-9.78	Peak	
2	2388.5000	45.30	7.77	53.07	54.00	-0.93	AVG	
3	2390.0000	56.18	7.78	63.96	74.00	-10.04	Peak	
4	2390.0000	43.79	7.78	51.57	54.00	-2.43	AVG	
5 *	2410.9000	99.28	7.83	107.11	54.00	53.11	AVG	No Limit
6	2411.0000	108.53	7.83	116.36	74.00	42.36	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) $\text{Margin Level} = \text{Measurement Value} - \text{Limit Value}.$

Test Mode	TX BE(EHT20) Mode 2417 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

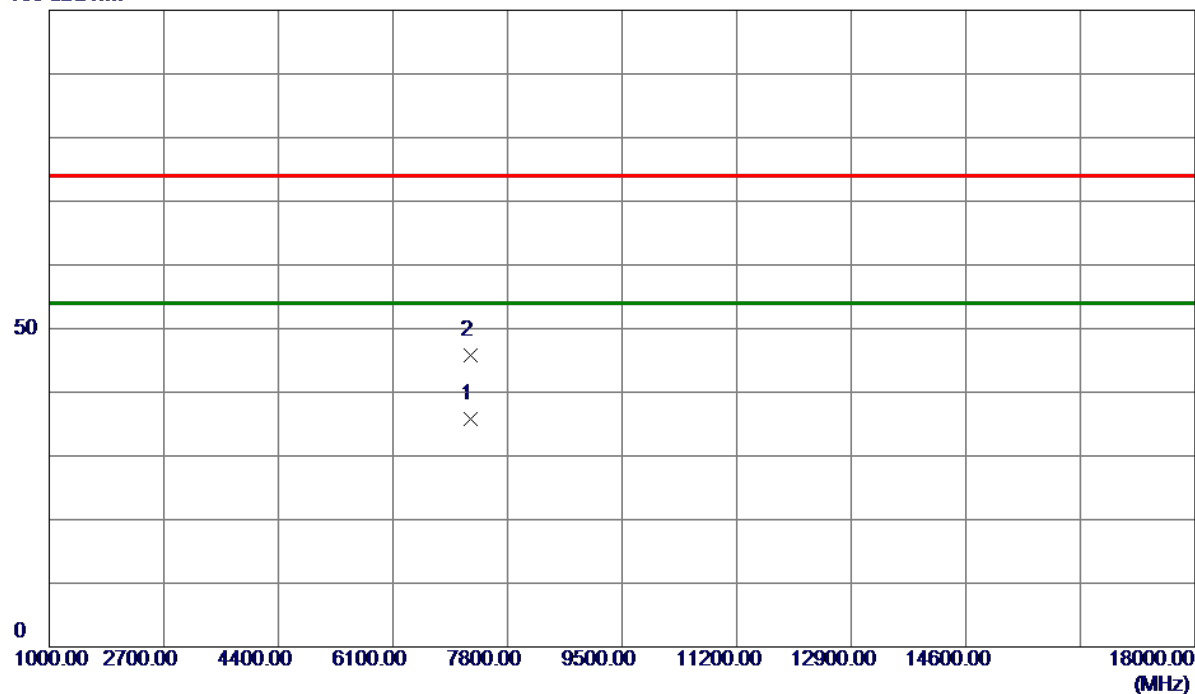


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7254.6000	26.12	9.59	35.71	54.00	-18.29	AVG	
2	7259.4200	36.23	9.59	45.82	74.00	-28.18	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode 2417 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

130 dBuV/m

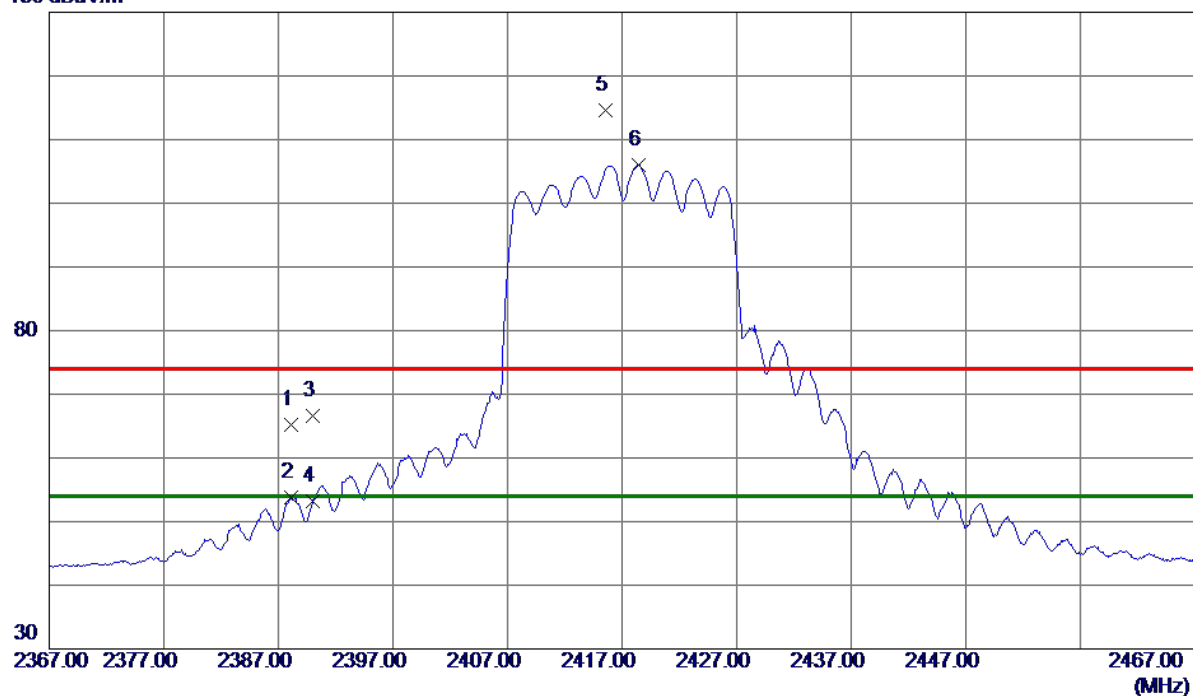


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2388.1000	57.38	7.77	65.15	74.00	-8.85	Peak	
2	2388.1000	46.09	7.77	53.86	54.00	-0.14	AVG	
3	2390.0000	58.82	7.78	66.60	74.00	-7.40	Peak	
4	2390.0000	45.38	7.78	53.16	54.00	-0.84	AVG	
5	2415.6000	106.77	7.84	114.61	74.00	40.61	Peak	No Limit
6 *	2418.4000	98.20	7.84	106.04	54.00	52.04	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode 2437 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

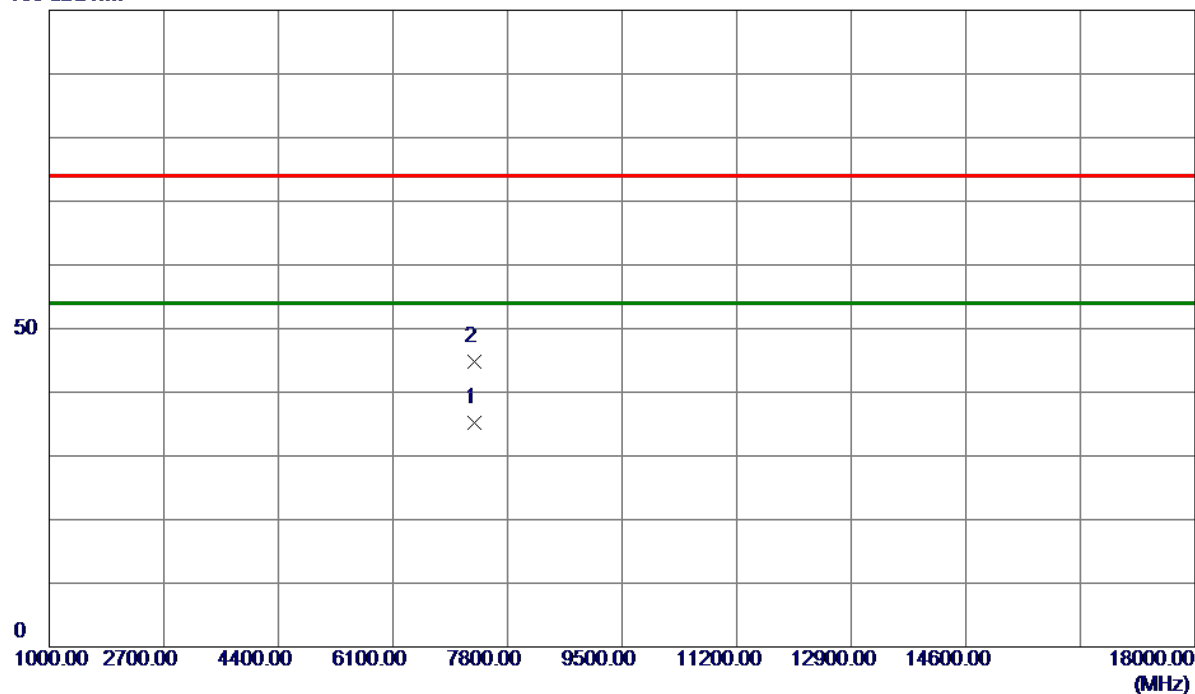


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7308.8000	25.70	9.55	35.25	54.00	-18.75	AVG	
2	7314.0000	35.21	9.54	44.75	74.00	-29.25	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode 2437 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

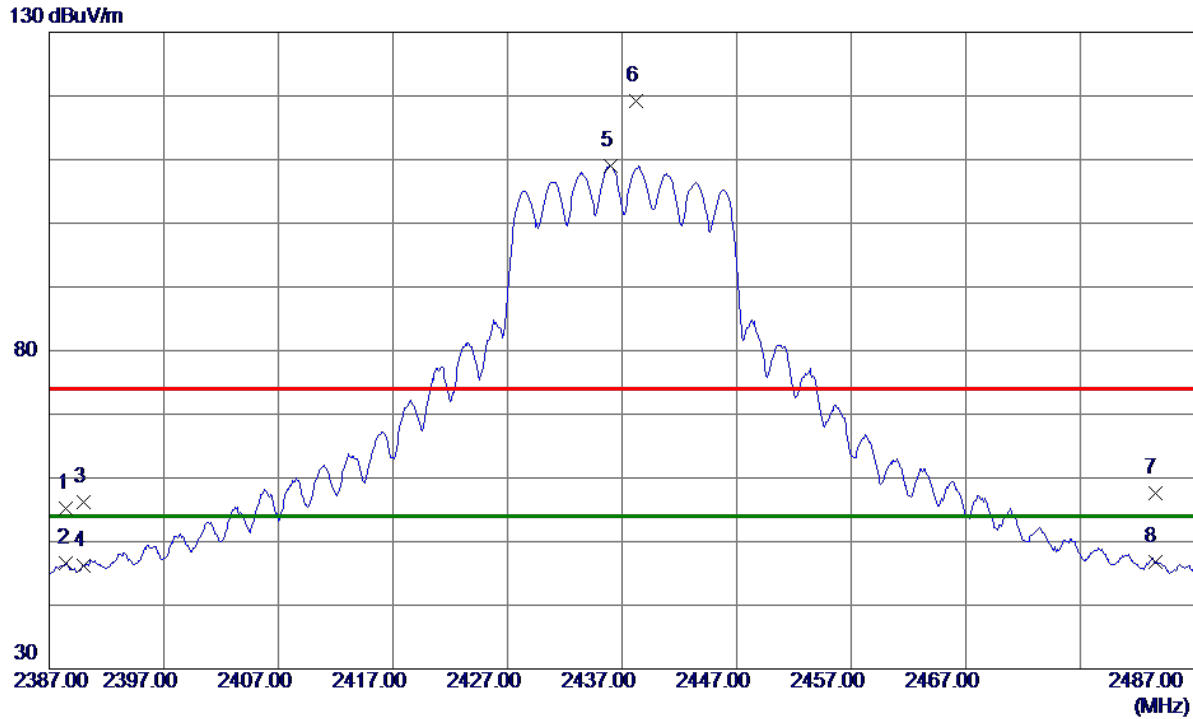

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2388.5000	47.41	7.77	55.18	74.00	-18.82	Peak	
2	2388.5000	38.74	7.77	46.51	54.00	-7.49	AVG	
3	2390.0000	48.36	7.78	56.14	74.00	-17.86	Peak	
4	2390.0000	38.45	7.78	46.23	54.00	-7.77	AVG	
5 *	2436.0000	101.20	7.89	109.09	54.00	55.09	AVG	No Limit
6	2438.2000	111.23	7.89	119.12	74.00	45.12	Peak	No Limit
7	2483.5000	49.54	8.00	57.54	74.00	-16.46	Peak	
8	2483.5000	38.81	8.00	46.81	54.00	-7.19	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) $\text{Margin Level} = \text{Measurement Value} - \text{Limit Value}.$

Test Mode	TX BE(EHT20) Mode 2457 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

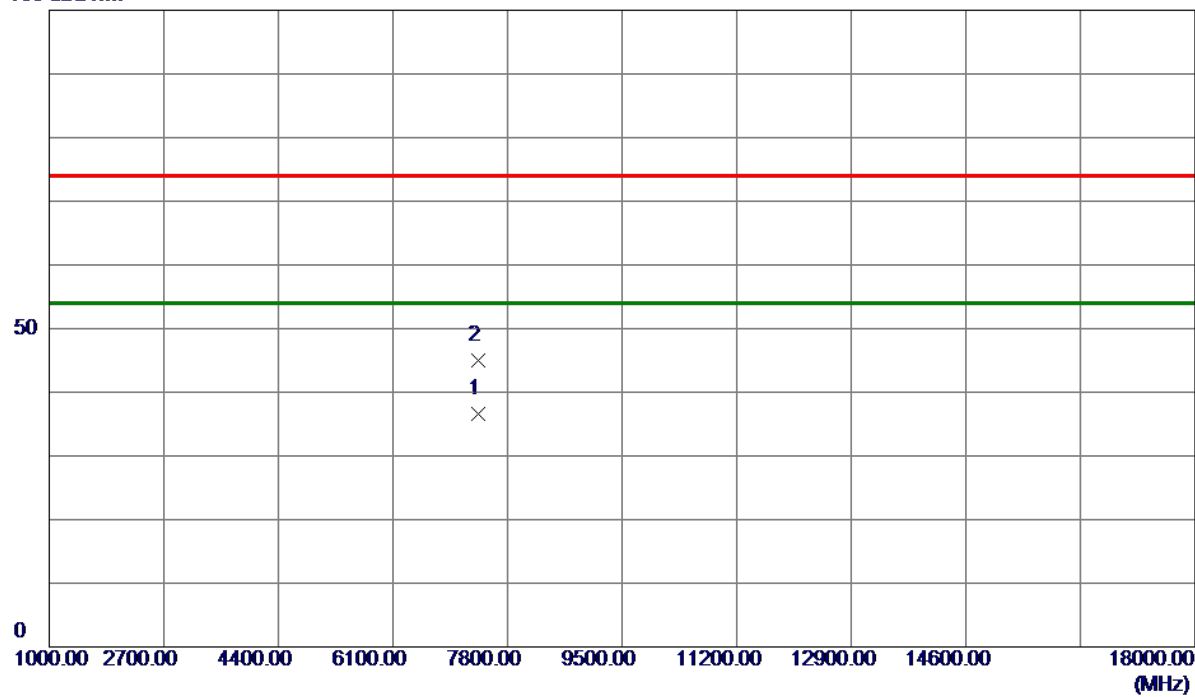


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7364.0000	27.07	9.51	36.58	54.00	-17.42	AVG	
2	7365.0000	35.55	9.51	45.06	74.00	-28.94	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode 2457 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

130 dBuV/m

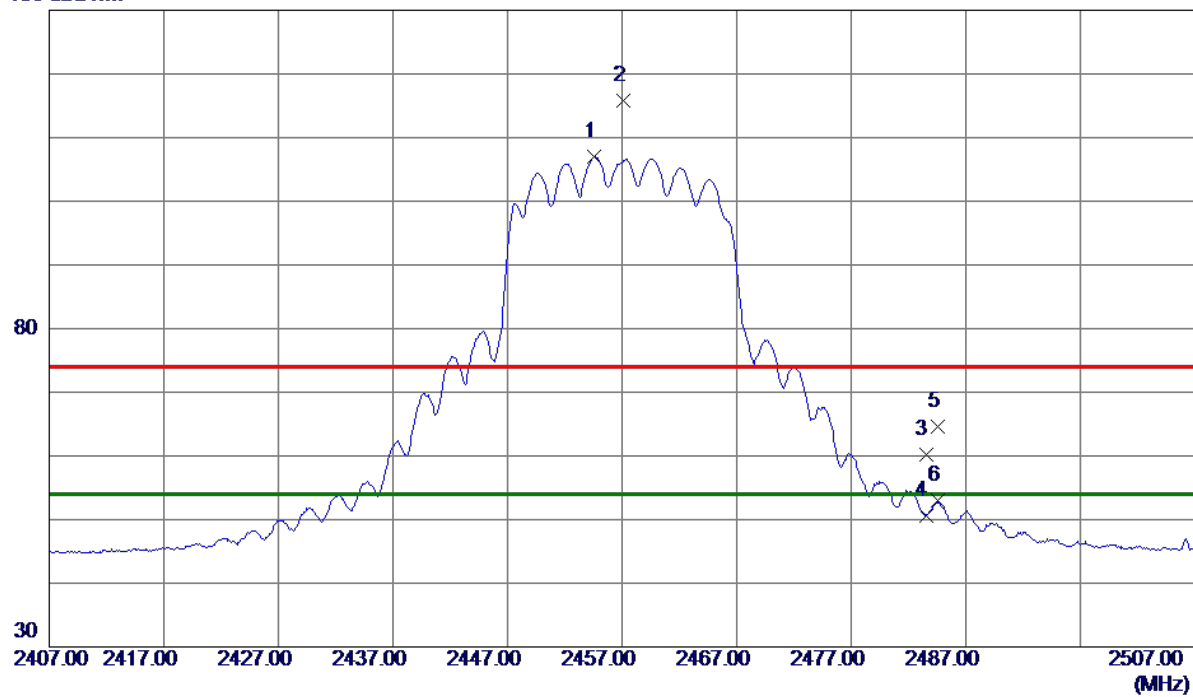


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2454.6000	99.14	7.93	107.07	54.00	53.07	AVG	No Limit
2	2457.1000	107.86	7.94	115.80	74.00	41.80	Peak	No Limit
3	2483.5000	52.27	8.00	60.27	74.00	-13.73	Peak	
4	2483.5000	42.66	8.00	50.66	54.00	-3.34	AVG	
5	2484.6000	56.63	8.00	64.63	74.00	-9.37	Peak	
6	2484.6000	44.98	8.00	52.98	54.00	-1.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode 2462 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

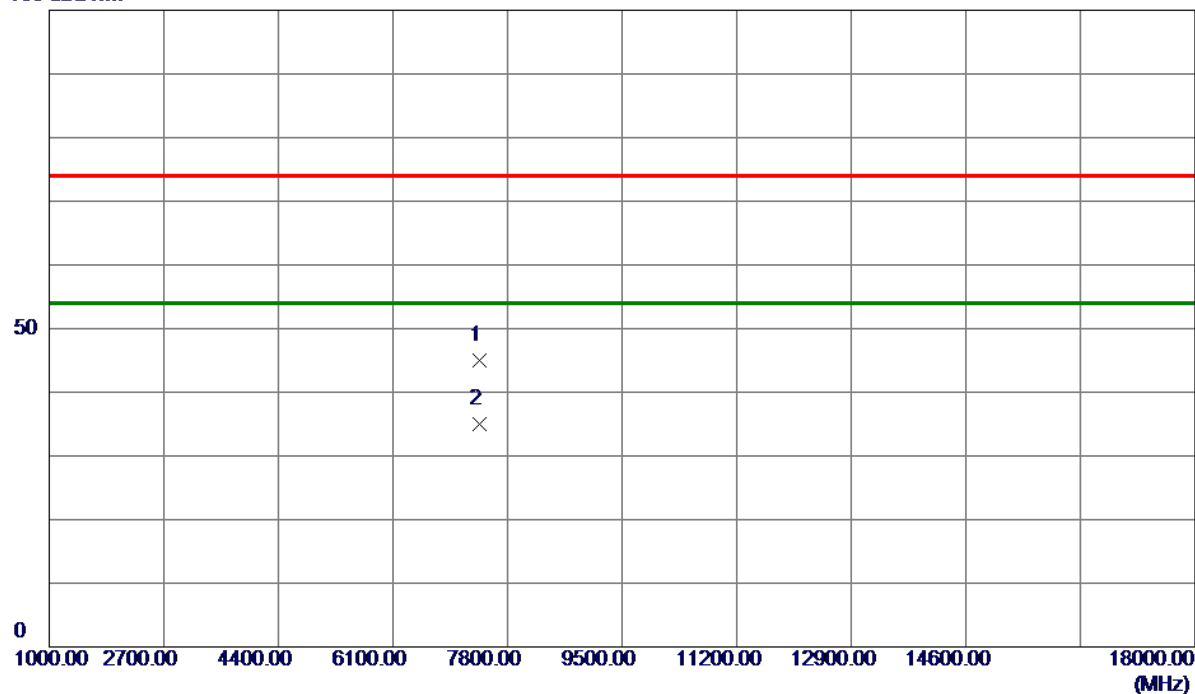


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7382.5200	35.58	9.49	45.07	74.00	-28.93	Peak	
2 *	7383.4600	25.52	9.49	35.01	54.00	-18.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode 2462 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

130 dBuV/m

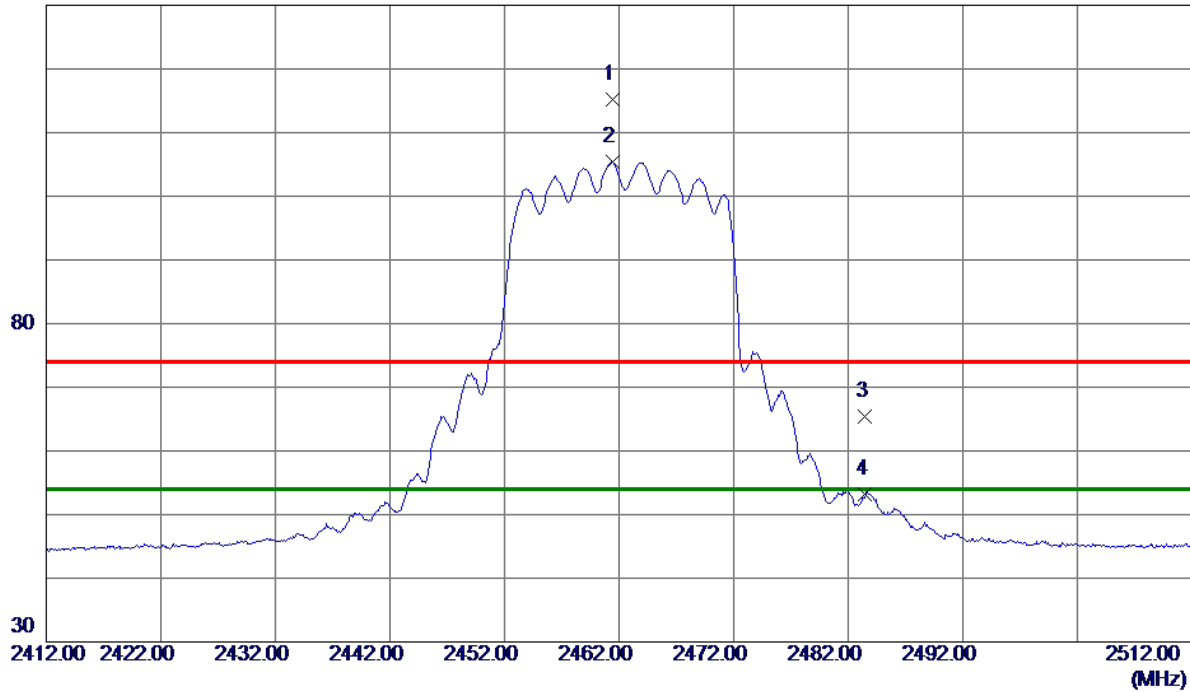

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2461.4000	107.20	7.95	115.15	74.00	41.15	Peak	No Limit
2 *	2461.4000	97.40	7.95	105.35	54.00	51.35	AVG	No Limit
3	2483.5000	57.47	8.00	65.47	74.00	-8.53	Peak	
4	2483.5000	45.24	8.00	53.24	54.00	-0.76	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2422 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

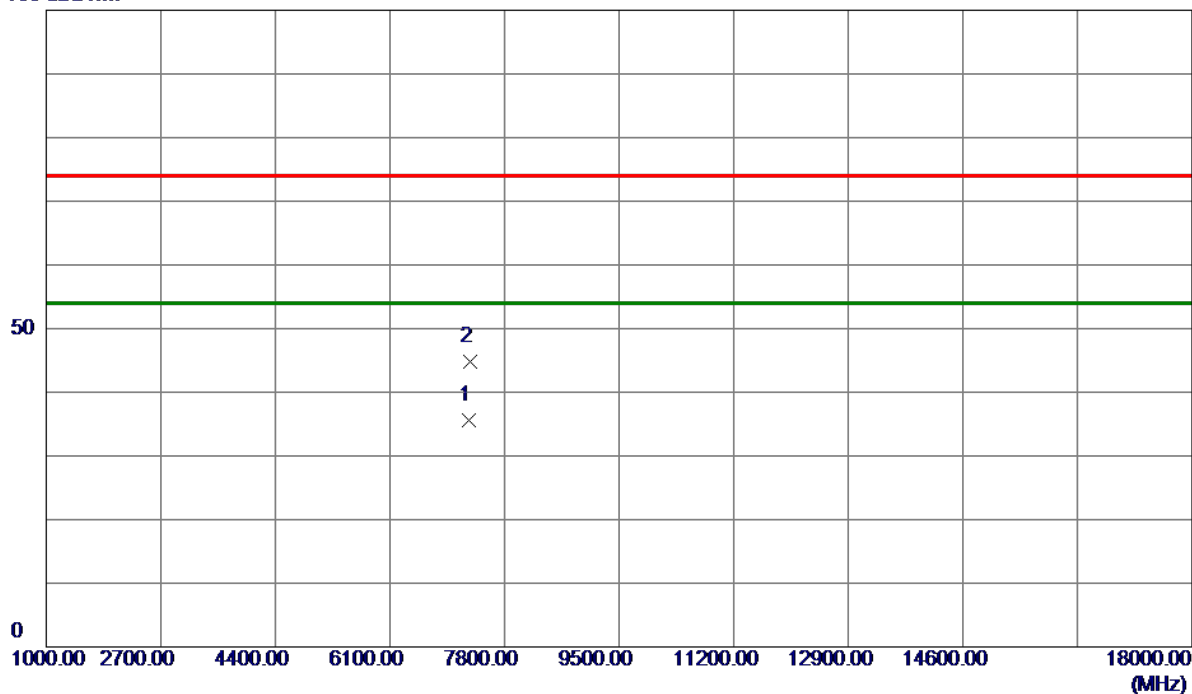


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7265.0000	26.04	9.58	35.62	54.00	-18.38	AVG	
2	7294.8000	35.17	9.56	44.73	74.00	-29.27	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2422 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

130 dBuV/m

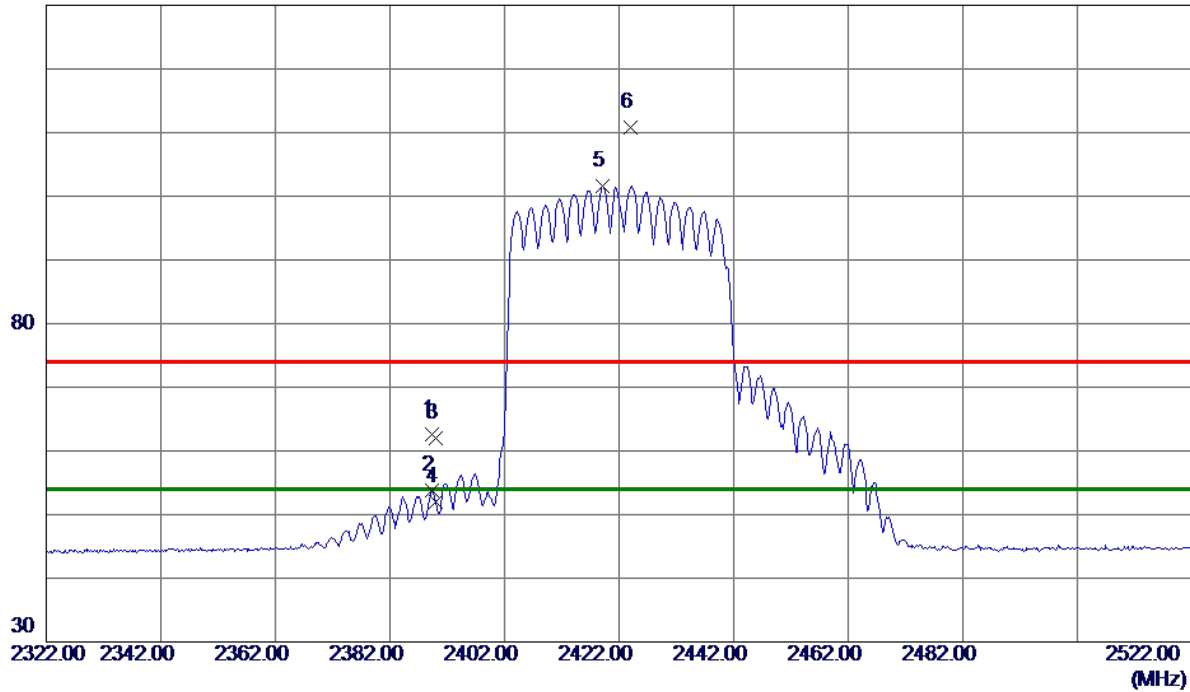

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.4000	54.82	7.77	62.59	74.00	-11.41	Peak	
2	2389.4000	45.95	7.77	53.72	54.00	-0.28	AVG	
3	2390.0000	54.15	7.78	61.93	74.00	-12.07	Peak	
4	2390.0000	44.31	7.78	52.09	54.00	-1.91	AVG	
5 *	2419.2000	93.69	7.85	101.54	54.00	47.54	AVG	No Limit
6	2424.0000	102.96	7.86	110.82	74.00	36.82	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2427 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

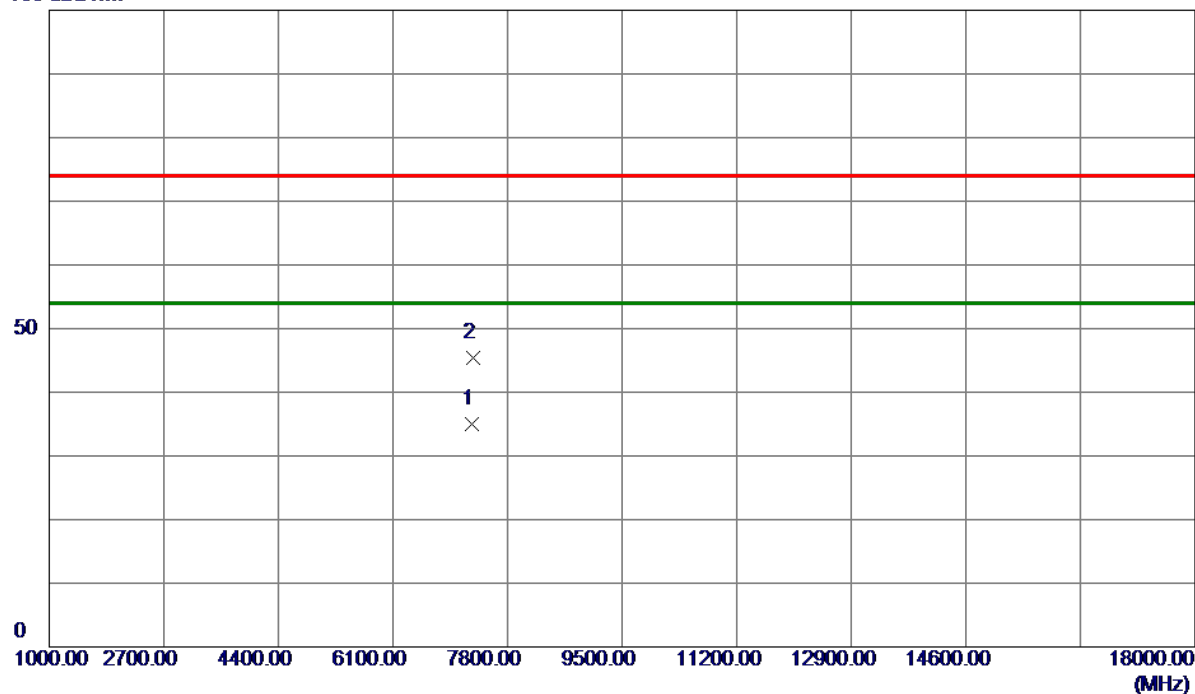


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7271.0400	25.49	9.58	35.07	54.00	-18.93	AVG	
2	7282.8800	35.74	9.57	45.31	74.00	-28.69	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2427 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

130 dBuV/m

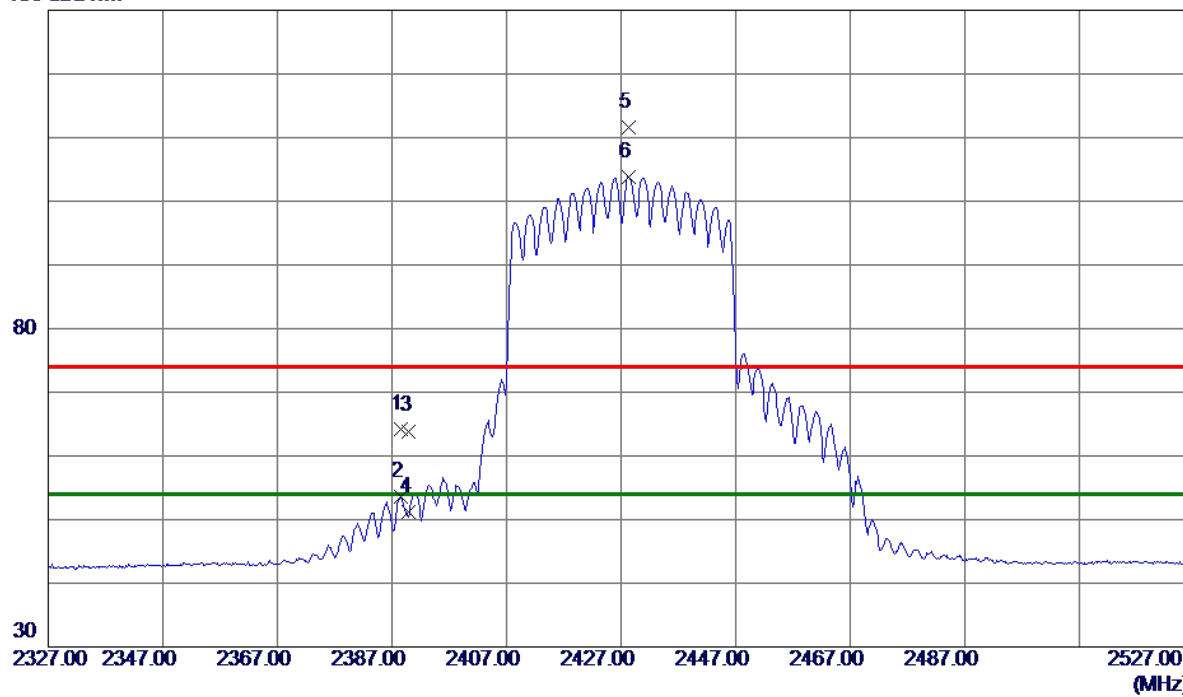


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2388.6000	56.37	7.77	64.14	74.00	-9.86	Peak	
2	2388.6000	45.75	7.77	53.52	54.00	-0.48	AVG	
3	2390.0000	56.12	7.78	63.90	74.00	-10.10	Peak	
4	2390.0000	43.36	7.78	51.14	54.00	-2.86	AVG	
5	2428.4000	103.82	7.87	111.69	74.00	37.69	Peak	No Limit
6 *	2428.4000	95.99	7.87	103.86	54.00	49.86	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2437 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

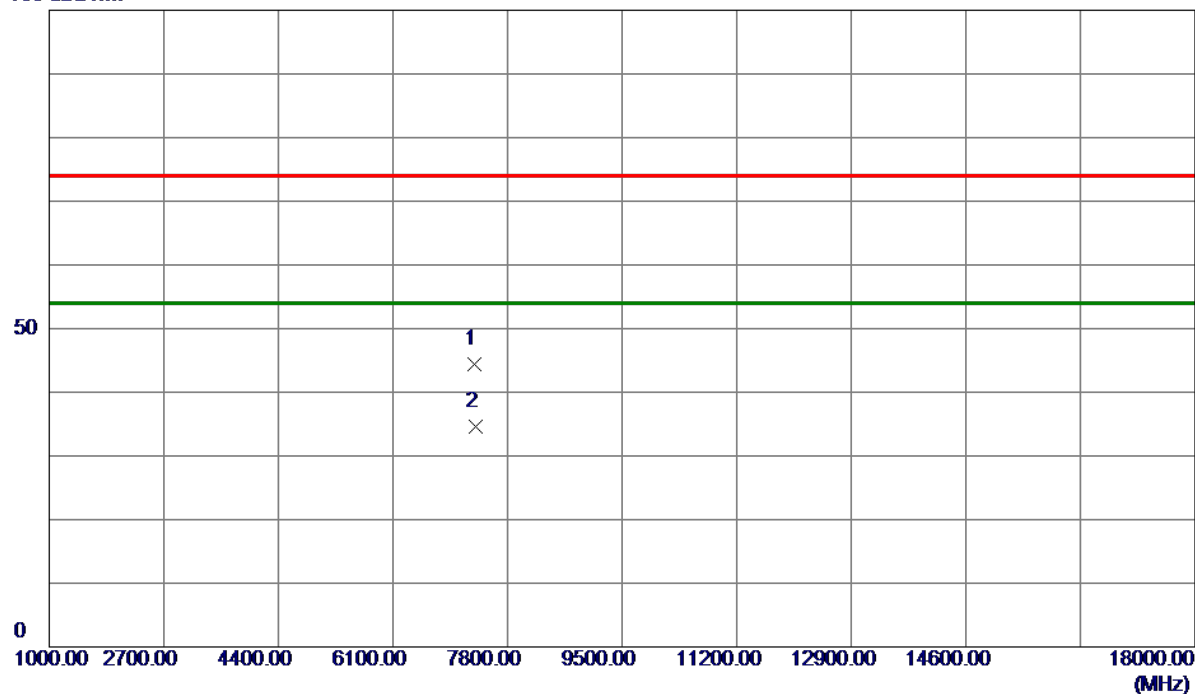


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7315.6500	34.88	9.54	44.42	74.00	-29.58	Peak	
2 *	7332.3500	25.04	9.53	34.57	54.00	-19.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2437 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

130 dBuV/m

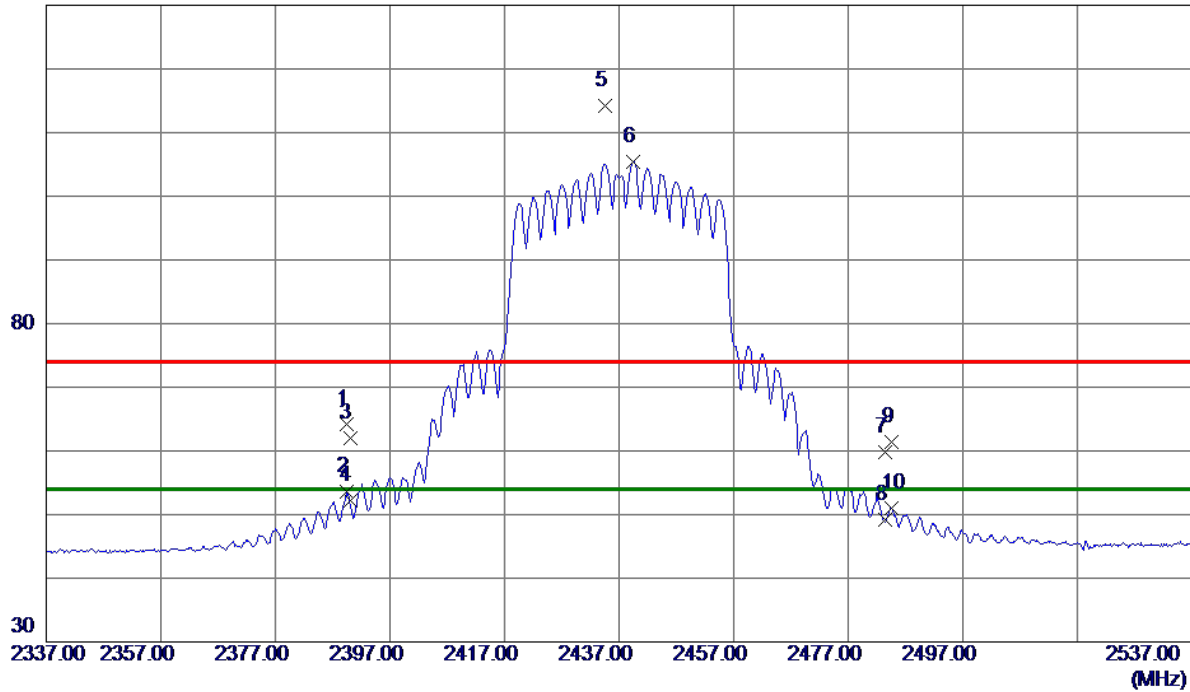

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.4000	56.51	7.77	64.28	74.00	-9.72	Peak	
2	2389.4000	45.85	7.77	53.62	54.00	-0.38	AVG	
3	2390.0000	54.30	7.78	62.08	74.00	-11.92	Peak	
4	2390.0000	44.39	7.78	52.17	54.00	-1.83	AVG	
5	2434.6000	106.24	7.88	114.12	74.00	40.12	Peak	No Limit
6 *	2439.4000	97.46	7.89	105.35	54.00	51.35	AVG	No Limit
7	2483.5000	51.76	8.00	59.76	74.00	-14.24	Peak	
8	2483.5000	41.25	8.00	49.25	54.00	-4.75	AVG	
9	2484.6000	53.37	8.00	61.37	74.00	-12.63	Peak	
10	2484.6000	43.09	8.00	51.09	54.00	-2.91	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2447 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

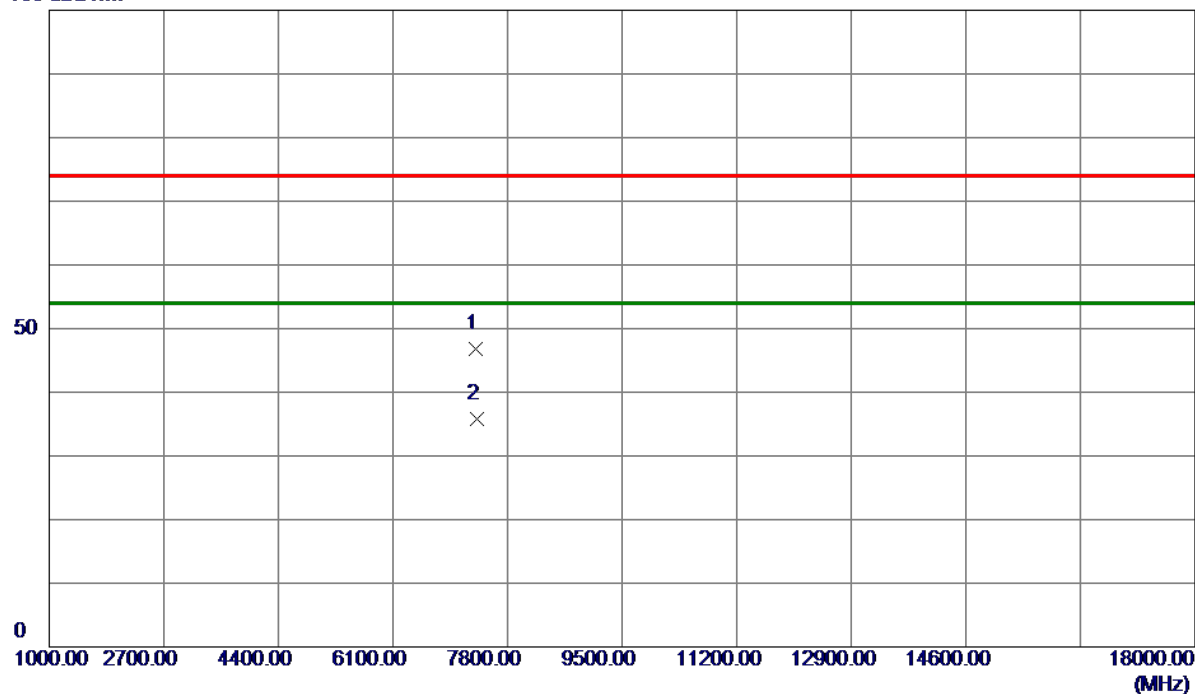


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7330.2000	37.23	9.53	46.76	74.00	-27.24	Peak	
2 *	7350.9000	26.27	9.52	35.79	54.00	-18.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2447 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

130 dBuV/m

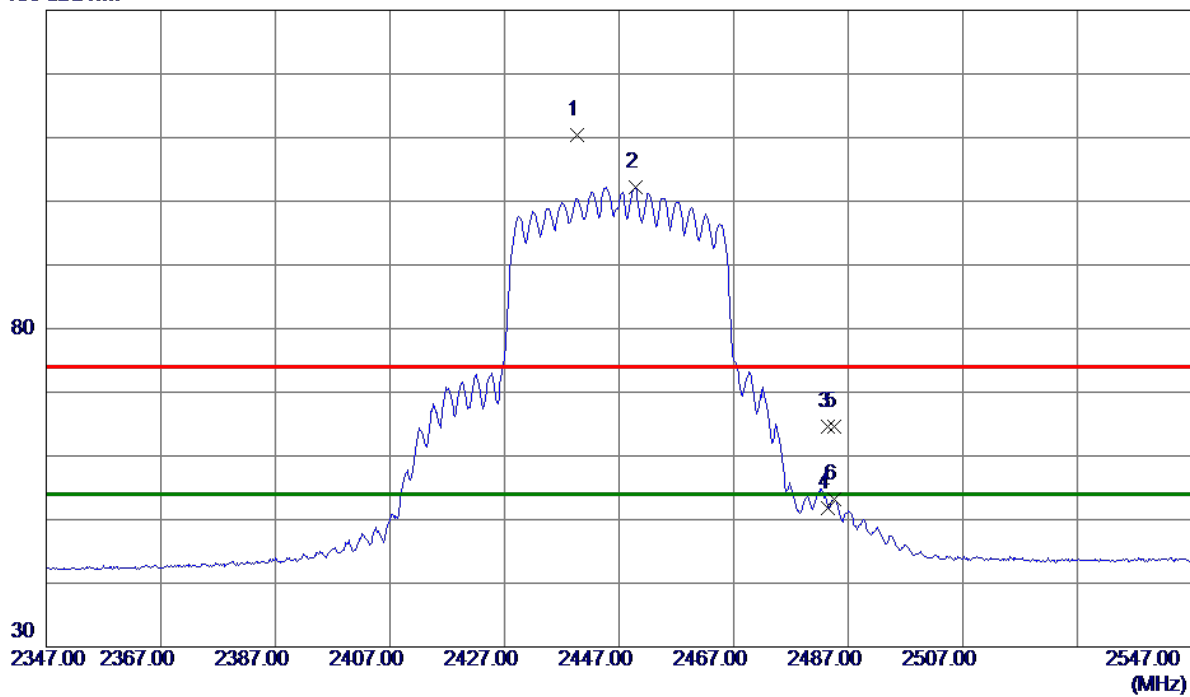


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2439.6000	102.57	7.90	110.47	74.00	36.47	Peak	No Limit
2 *	2449.8000	94.19	7.92	102.11	54.00	48.11	AVG	No Limit
3	2483.5000	56.61	8.00	64.61	74.00	-9.39	Peak	
4	2483.5000	43.77	8.00	51.77	54.00	-2.23	AVG	
5	2484.6000	56.51	8.00	64.51	74.00	-9.49	Peak	
6	2484.6000	45.21	8.00	53.21	54.00	-0.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2452 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

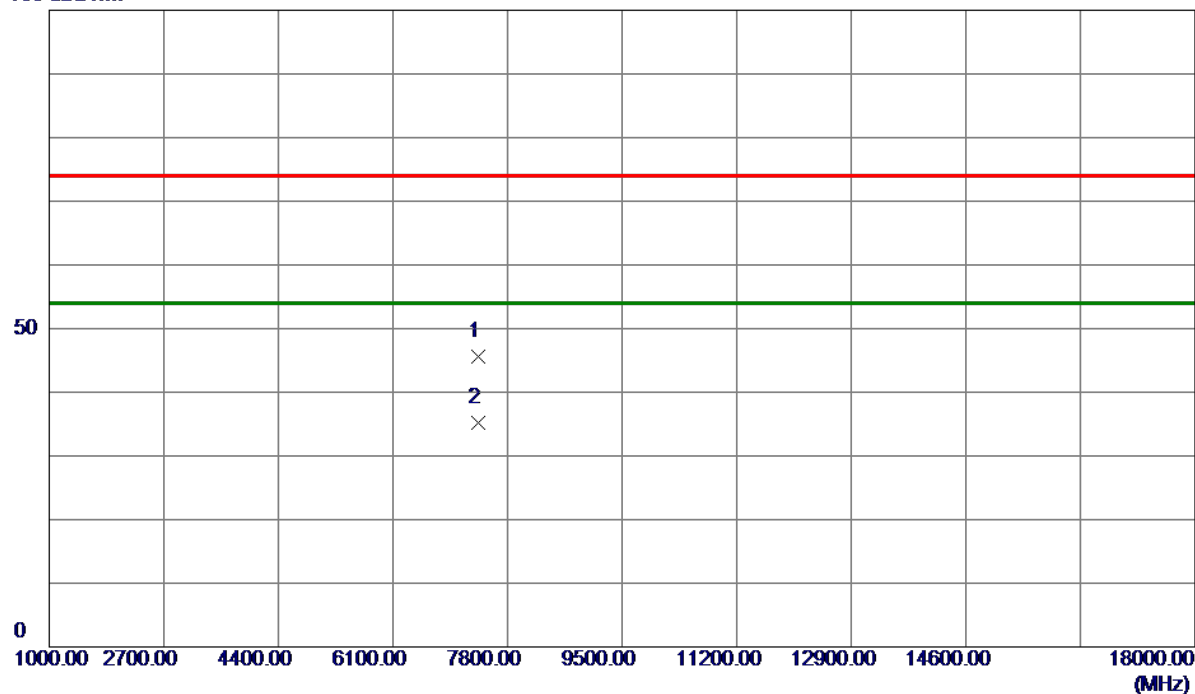


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7360.2000	36.15	9.51	45.66	74.00	-28.34	Peak	
2 *	7360.7000	25.60	9.51	35.11	54.00	-18.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2452 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

130 dBuV/m

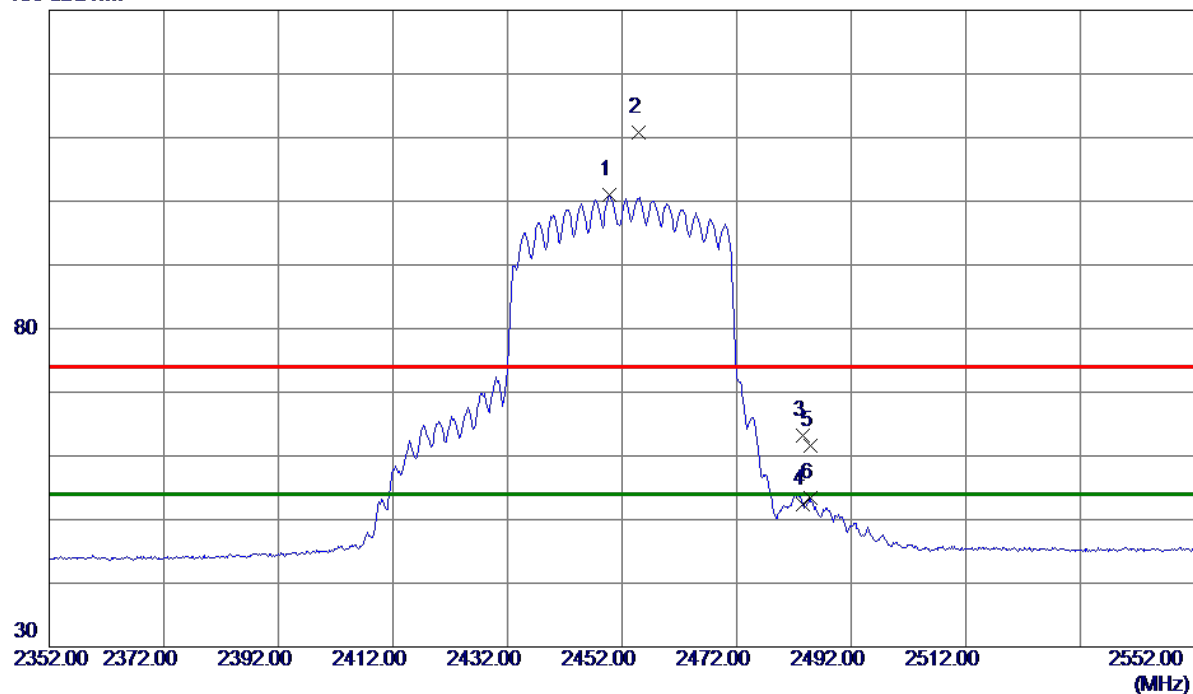


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2449.8000	92.99	7.92	100.91	54.00	46.91	AVG	No Limit
2	2454.8000	102.84	7.93	110.77	74.00	36.77	Peak	No Limit
3	2483.5000	55.12	8.00	63.12	74.00	-10.88	Peak	
4	2483.5000	44.31	8.00	52.31	54.00	-1.69	AVG	
5	2484.8000	53.63	8.00	61.63	74.00	-12.37	Peak	
6	2484.8000	45.47	8.00	53.47	54.00	-0.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

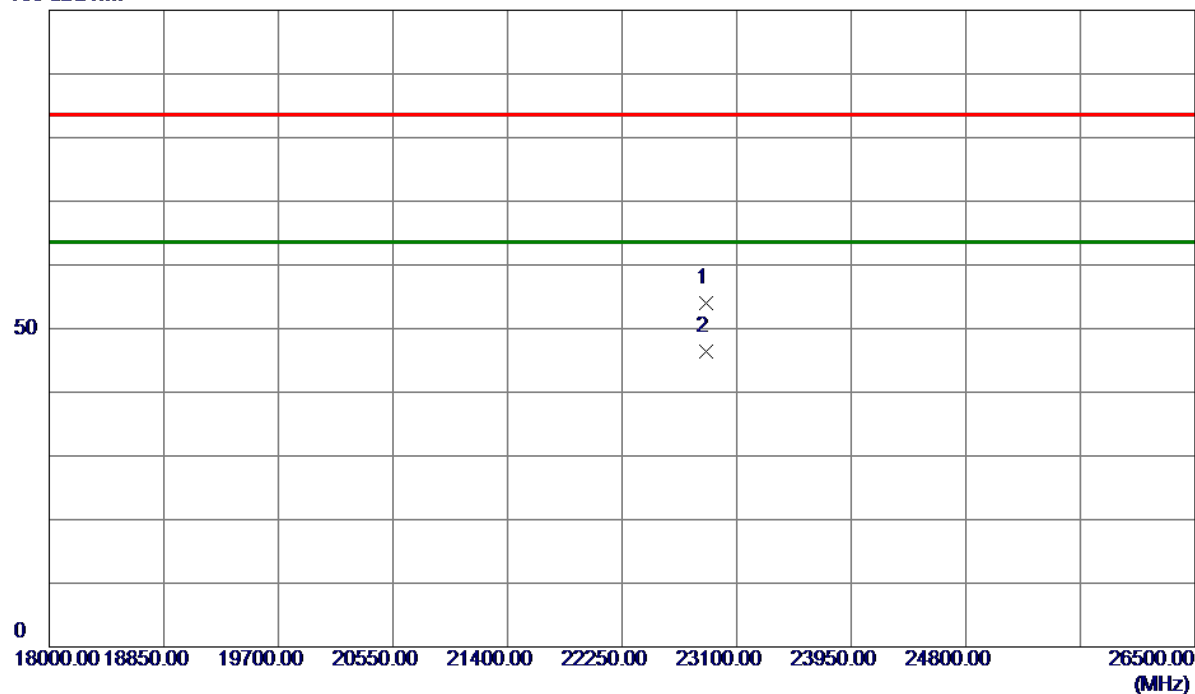


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	22870.5000	48.88	5.18	54.06	83.50	-29.44	Peak	
2 *	22870.5000	41.25	5.18	46.43	63.50	-17.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

100 dBuV/m

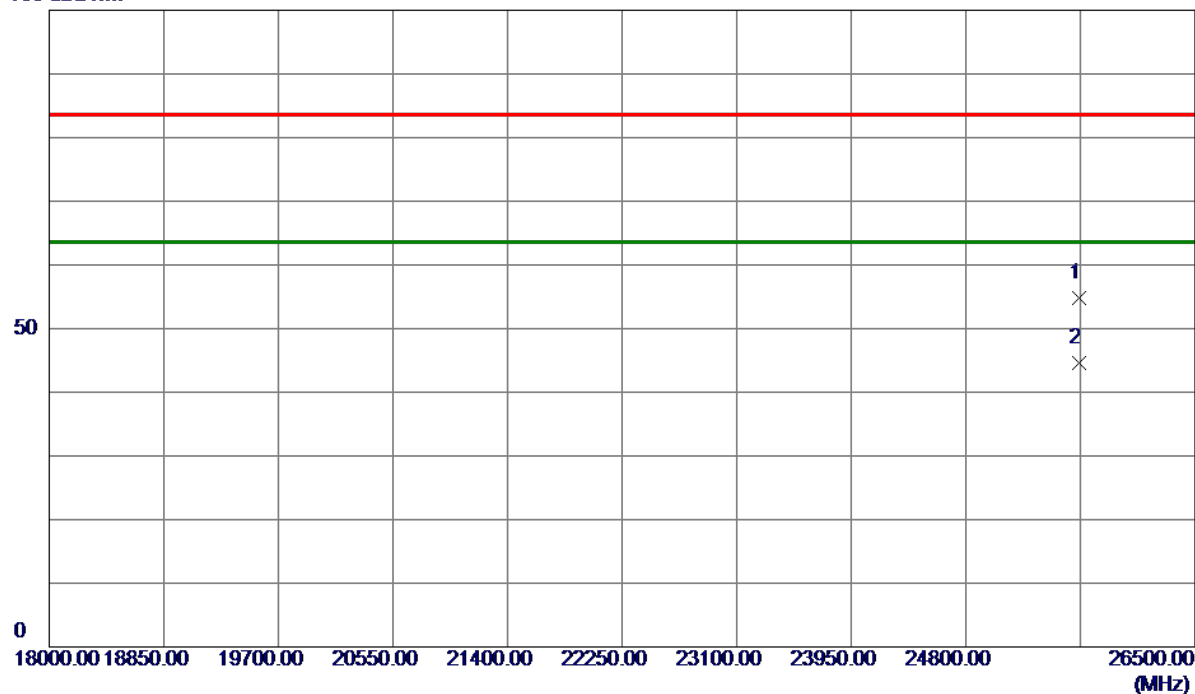

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25641.5000	49.01	5.81	54.82	83.50	-28.68	Peak	
2 *	25641.5000	38.75	5.81	44.56	63.50	-18.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

