



DFS MEASUREMENT REPORT

FCC ID: 2BH7FEAP773V2

Applicant: TP-Link Systems Inc.

Product: BE11000 Ceiling Mount Wi-Fi 7 Access Point

Model No.: EAP773

Brand Name: tp-link

FCC Classification: Unlicensed National Information Infrastructure (NII)

FCC Rule Part(s): Part 15 Subpart E (Section 15.407)

Type of Device: Master

Result: Complies

Received Date: 2025-12-16

Test Date: 2026-01-31 ~ 2026-02-26

Reviewed By:

Yuri Li

Yuri Li

Approved By:

Robin Wu

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report. Testing was performed in accordance with the applicable measurement procedures. The test results reported herein apply only to the specific item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
R25S1036128-U204	V01	Initial Report	2026-04-20	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information	6
1.5. Radio Specification under Test	6
1.6. Working Frequencies	7
1.7. Antenna Details	8
2. Test Configuration	9
2.1. Test Mode	9
2.2. Test Channel	9
2.3. Applied Standards	9
2.4. Test Environment Condition	9
3. DFS Detection Thresholds and Radar Test Waveforms	10
3.1. Applicability	10
3.2. DFS Devices Requirements	11
3.3. DFS Detection Threshold Values	13
3.4. Parameters of DFS Test Signals	14
3.5. Conducted Test Setup	17
4. Measuring Instrument	18
5. Test Result	19
5.1. Summary	19
5.2. Radar Waveform Calibration Measurement	20
5.2.1. Calibration Setup	20
5.2.2. Calibration Procedure	20
5.2.3. Calibration & Channel Loading Result	20
5.3. NII Detection Bandwidth Measurement	21
5.3.1. Test Limit	21
5.3.2. Test Procedure	21
5.3.3. Test Result	22
5.4. Initial Channel Availability Check Time Measurement	23
5.4.1. Test Limit	23
5.4.2. Test Procedure	23
5.4.3. Test Result	23
5.5. Radar Burst at the Beginning of the Channel Availability Check Time Measurement	24

5.5.1. Test Limit	24
5.5.2. Test Procedure	24
5.5.3. Test Result	24
5.6. Radar Burst at the End of the Channel Availability Check Time Measurement	25
5.6.1. Test Limit	25
5.6.2. Test Procedure	25
5.6.3. Test Result	25
5.7. In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Measurement	26
5.7.1. Test Limit	26
5.7.2. Test Procedure	26
5.7.3. Test Result	26
5.8. Statistical Performance Check Measurement	27
5.8.1. Test Limit	27
5.8.2. Test Procedure	27
5.8.3. Test Result	27
Appendix A - Test Result	28
A.1 Calibration Test Result	28
A.2 Channel Loading Test Result	30
A.3 NII Detection Bandwidth Test Result	32
A.4 Initial Channel Availability Check Time Test Result	40
A.5 Radar Burst at the Beginning of the Channel Availability Check Time Test Result	41
A.6 Radar Burst at the End of the Channel Availability Check Time Test Result	42
A.7 In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Test Result	43
A.8 Statistical Performance Check	46
Appendix B - Test Setup Photograph	260
Appendix C - EUT Photograph	261

1. General Information

1.1. Applicant

TP-Link Systems Inc.

10 Mauchly, Irvine, CA 92618

1.2. Manufacturer

TP-Link Systems Inc.

10 Mauchly, Irvine, CA 92618

1.3. Testing Facility

☒	Test Site - MRT Suzhou Laboratory Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China Laboratory Location (Suzhou - Wujiang) Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China Laboratory Accreditations A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001
☐	Test Site - MRT Shenzhen Laboratory Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China Laboratory Accreditations A2LA: 3628.02 FCC: CN1284 ISED: CN0105
☐	Test Site - MRT Taiwan Laboratory Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) Laboratory Accreditations TAF: 3261 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	BE11000 Ceiling Mount Wi-Fi 7 Access Point	
Model No.	EAP773	
EUT Identification No.	Y-260122-R128-03 (AP) Y-260122-R128-02 (Mesh)	
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be	
Bluetooth Specification	BLE only	
Antenna Information	Refer to section 1.7	
Working Voltage	AC/DC Adapter input	
Operating Environment	☒ Indoor Use	☐ Outdoor Use
Accessory(ies)		
AC/DC Adapter	Model: T120250-2B4 Input: 100-240 V 50/60 Hz 0.8 A Output: 12 V DC 2.5 A	
PoE Adapter	Model: POE4824G Input: 100-240 V ~ 50/60 Hz 0.8 A Output: 48 V DC 0.5 A 24.0 W	
Notes:		
1. The information of the EUT (Equipment Under Test) was provided by the manufacturer. The accuracy, completeness, and validity of the information are solely the responsibility of the manufacturer.		
2. For this report, we select AC Adapter for testing.		
3. AC/DC Adapter and PoE Injector are not marketed in conjunction with the device.		

1.5. Radio Specification under Test

Frequency Range	UNII-2A: 5250 ~ 5350 MHz UNII-2C: 5470 ~ 5725 MHz
Type of Modulation	802.11a/n/ac: OFDM 802.11ax/be: OFDMA
Data Rate	802.11a: 6/9/12/18/24/36/48/54 Mbps 802.11n: up to 300 Mbps 802.11ac: up to 1733.3 Mbps 802.11ax: up to 2402 Mbps 802.11be: up to 2882 Mbps
Power-on cycle	Requires 44 seconds to complete its power-on cycle
Uniform Spreading (For DFS Frequency Band)	For the 5250-5350 MHz, 5470-5725 MHz bands, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm.

1.6. Working Frequencies

802.11a/n-HT20/ac-VHT20/ax-HE20/be-EHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
52	5260 MHz	56	5280 MHz	60	5300 MHz
64	5320 MHz	100	5500 MHz	104	5520 MHz
108	5540 MHz	112	5560 MHz	116	5580 MHz
120	5600 MHz	124	5620 MHz	128	5640 MHz
132	5660 MHz	136	5680 MHz	140	5700 MHz
144	5720 MHz	--	--	--	--

802.11n-HT40/ac-VHT40/ax-HE40/be-EHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz	102	5510 MHz
110	5550 MHz	118	5590 MHz	126	5630 MHz
134	5670 MHz	142	5710 MHz	--	--

802.11ac-VHT80/ax-HE80/be-EHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
58	5290 MHz	106	5530 MHz	122	5610 MHz
138	5690 MHz	--	--	--	--

802.11ac-VHT160/ax-HE160/be-EHT160

Channel	Frequency	Channel	Frequency	Channel	Frequency
50	5250 MHz	114	5570 MHz	--	--

802.11be-EHT240

Channel	Frequency	Channel	Frequency	Channel	Frequency
122	5610 MHz	--	--	--	--

1.7. Antenna Details

Antenna Type	Frequency Band (MHz)	Tx Paths	Number of spatial streams	Antenna Gain (dBi)				CDD Directional Gain (dBi)	
				Ant 1	Ant 2	Ant 3	Ant 4	For Power	For PSD
Wi-Fi 2.4G									
PIFA	2400 ~ 2483.5	2	1	4.79	4.52	--	--	3.0	4.0
Wi-Fi 5G									
PIFA	5150 ~ 5250	2	1	--	--	6.02	5.20	3.0	5.0
	5250 ~ 5350	2	1	--	--	6.02	6.30	3.0	5.0
	5470 ~ 5725	2	1	--	--	6.53	6.03	3.0	5.0
	5725 ~ 5850	2	1	--	--	6.98	6.02	3.0	5.0
Wi-Fi 6G									
PIFA	5925 ~ 6425	2	1	5.20	6.54	--	--	3.0	5.0
		2	2	5.20	6.54	--	--	3.0	3.0
	6425 ~ 6525	2	1	4.42	6.40	--	--	3.0	5.0
		2	2	4.42	6.40	--	--	3.0	3.0
	6525 ~ 6875	2	1	5.34	7.37	--	--	3.0	5.0
		2	2	5.34	7.37	--	--	3.0	3.0
	6875 ~ 7125	2	1	4.70	7.22	--	--	3.0	5.0
		2	2	4.70	7.22	--	--	3.0	3.0
Notes:									
1. The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.									
2. The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac/ax/be, not include 802.11a/b/g.									
3. The antenna gain is from antenna report that was provided by the applicant.									

2. Test Configuration

2.1. Test Mode

Mode 1: Operating under AP mode
Mode 2: Operating under Mesh mode

2.2. Test Channel

Test Mode	Test Channel	Test Frequency
802.11be-EHT20	100	5500 MHz
802.11be-EHT40	102	5510 MHz
802.11be-EHT80	106	5530 MHz
802.11be-EHT160	50	5250 MHz
802.11be-EHT160	114	5570 MHz
802.11be-EHT240	130	5650 MHz

2.3. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.407 Section (h)(2)
- KDB 905462 D02 v02
- KDB 905462 D04 v01

2.4. Test Environment Condition

Ambient Temperature	15 ~ 35 °C
Relative Humidity	20 ~ 75%RH

3. DFS Detection Thresholds and Radar Test Waveforms

3.1. Applicability

The following table from FCC KDB 905462 D02 NII DFS Compliance Procedures New Rules v02 lists the applicable requirements for the DFS testing.

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 3-1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

Table 3-2: Applicability of DFS Requirements during normal operation

3.2. DFS Devices Requirements

Per FCC KDB 905462 D02 NII DFS Compliance Procedures New Rules v02 the following are the requirements for Master Devices:

- (a) The Master Device will use DFS in order to detect Radar Waveforms with received signal strength above the DFS Detection Threshold in the 5250 ~ 5350 MHz and 5470 ~ 5725 MHz bands. DFS is not required in the 5150 ~ 5250 MHz or 5725 ~ 5825 MHz bands.
- (b) Before initiating a network on a Channel, the Master Device will perform a Channel Availability Check for a specified time duration (Channel Availability Check Time) to ensure that there is no radar system operating on the Channel, using DFS described under subsection a) above.
- (c) The Master Device initiates a U-NII network by transmitting control signals that will enable other U-NII devices to Associate with the Master Device.
- (d) During normal operation, the Master Device will monitor the Channel (In-Service Monitoring) to ensure that there is no radar system operating on the Channel, using DFS described under a).
- (e) If the Master Device has detected a Radar Waveform during In-Service Monitoring as described under d), the Operating Channel of the U-NII network is no longer an Available Channel. The Master Device will instruct all associated Client Device(s) to stop transmitting on this Channel within the Channel Move Time. The transmissions during the Channel Move Time will be limited to the Channel Closing Transmission Time.
- (f) Once the Master Device has detected a Radar Waveform it will not utilize the Channel for the duration of the Non-Occupancy Period.
- (g) If the Master Device delegates the In-Service Monitoring to a Client Device, then the combination will be tested to the requirements described under d) through f) above.

Channel Move Time and Channel Closing Transmission Time requirements are listed in the following table.

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 3-3: DFS Response Requirements

3.3. DFS Detection Threshold Values

The DFS detection thresholds are defined for Master devices and Client Devices with In-service monitoring.

These detection thresholds are listed in the following table.

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

Table 3-4: Detection Thresholds for Master Devices and Client Devices with Radar Detection

3.4. Parameters of DFS Test Signals

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 3-6	$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 3-5: Parameters for Short Pulse Radar Waveforms

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Table 3-6: Pulse Repetition Intervals Values for Test A

Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50 - 100	5 - 20	1000 - 2000	1 - 3	8 - 20	80%	30

Table 3-7: Parameters for Long Pulse Radar Waveforms

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses Per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

Table 3-8: Parameters for Frequency Hopping Radar Waveforms

For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 - 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

3.5. Conducted Test Setup

The FCC KDB 905462 D02 NII DFS Compliance Procedures New Rules v02 describes a radiated test setup and a conducted test setup. The conducted test setup was used for this testing. Figure 3-1 shows the typical test setup.

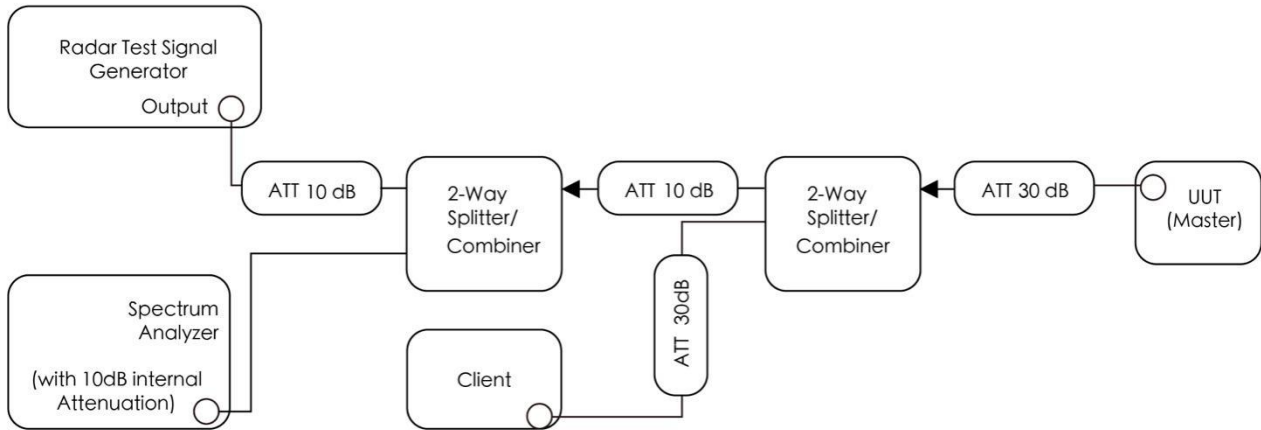


Figure 3-1: Conducted Test Setup where UUT is a Master and Radar Test Waveforms are injected into the Masters

4. Measuring Instrument

Instrument Name	Manufacturer	Model No.	Asset No.	Cali. Interval	Cal. Due Date	Test Site
Signal Analyzer	Keysight	N9010A	MRTSUE06195	1 year	2026-11-13	WJ-SR8
Signal Generator	Keysight	N5186A	MRTSUE07259	1 year	2026-11-06	WJ-SR8
Shielding Room	TDK	WJ-SR8	MRTSUE07130	N/A	N/A	WJ-SR8
Thermohygrometer	testo	608-H1	MRTSUE11334	1 year	2026-06-16	WJ-SR8
Power Divider	Woken	2-8GB	MRTSUE06262	1 year	2026-10-19	WJ-SR8
Fixed Attenuator	MVE	MVE2213	MRTSUE07310	1 year	2026-06-24	WJ-SR8
Cable	UCwave	UCE500	MRTSUE07335	Note	Note	WJ-SR8

Note: The loss of the RF cable will be measured before testing.

Client Information

Instrument	Manufacturer	Type No.	Certification Number
Wi-Fi Module	Intel	AX200 NGW	FCC ID: PD9 AX200 NG

Software	Version	Manufacturer	Function
DFS Tool	V 6.9.2	Agilent	DFS Test Software
Signal Studio	V4.3.0.0	Keysight	DFS Test Software

5. Test Result

5.1. Summary

Parameter	Verdict	Reference
NII Detection Bandwidth Measurement	Pass	Section 5.3
Initial Channel Availability Check Time	Pass	Section 5.4
Radar Burst at the Beginning of the Channel Availability Check Time	Pass	Section 5.5
Radar Burst at the End of the Channel Availability Check Time	Pass	Section 5.6
In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time	Pass	Section 5.7
Non-Occupancy Period	Pass	Section 5.7
Statistical Performance Check	Pass	Section 5.8

5.2. Radar Waveform Calibration Measurement

5.2.1. Calibration Setup

The conducted test setup was used for this calibration testing. Figure 3-2 shows the typical test setup.

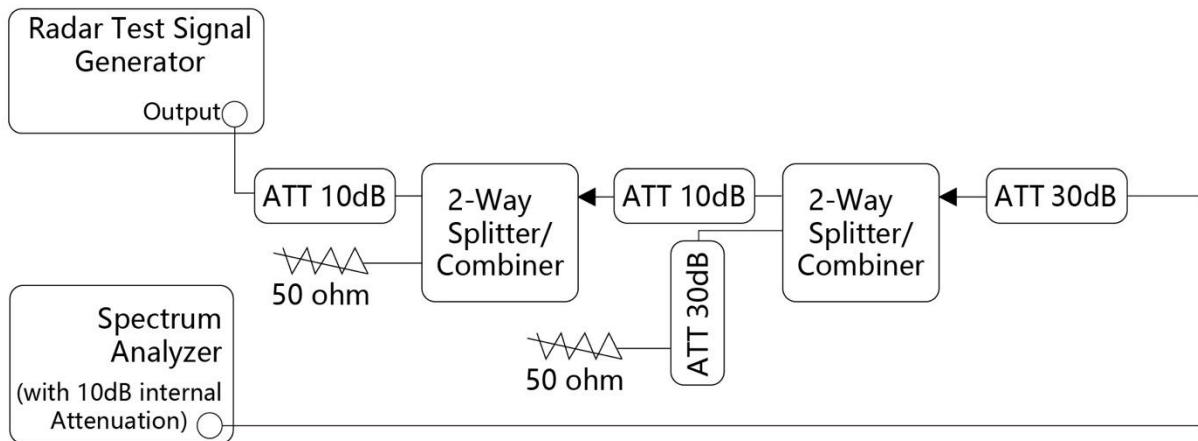


Figure 3-2: Conducted Test Setup

5.2.2. Calibration Procedure

The Interference Radar Detection Threshold Level is $(-64 \text{ dBm}) + (3.5) [\text{dBi}] + 1 \text{ dB} = -59.5 \text{ dBm}$ that had been taken into account the output power range and antenna gain. The above equipment setup was used to calibrate the conducted Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50 ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to at least 3 MHz. For the 802.11be-EHT240 5650 MHz Radar Statistical Performance Check (Type 3, 4, 5), the vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was:

$$(-64 \text{ dBm}) + (3.5 \text{ dBi}) + 1 \text{ dB} = -59.5 \text{ dBm}.$$

For other test items, the measured power level was set to:

$$(-64 \text{ dBm}) + (0 \text{ dBi}) + 1 \text{ dB} = -63 \text{ dBm}.$$

Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.

5.2.3. Calibration & Channel Loading Result

Refer to Appendix A.1&A.2.

5.3. NII Detection Bandwidth Measurement

5.3.1. Test Limit

Minimum 100% of the NII 99% transmission power bandwidth. During the U-NII Detection Bandwidth detection test, each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

5.3.2. Test Procedure

1. Adjust the equipment to produce a single Burst of any one of the Short Pulse Radar Types 0-4 in Table 3-5 at the center frequency of the EUT Operating Channel at the specified DFS Detection Threshold level.
2. The generating equipment is configured as shown in the Conducted Test Setup above section 3.5.
3. The EUT is set up as a stand-alone device (no associated Client or Master, as appropriate) and no traffic. Frame based systems will be set to a talk/listen ratio reflecting the worst case (maximum) that is user configurable during this test.
4. Generate a single radar Burst, and note the response of the EUT. Repeat for a minimum of 10 trials. The EUT must detect the Radar Waveform using the specified U-NII Detection Bandwidth criterion shown in Table 3-5. In cases where the channel bandwidth may exceed past the DFS band edge on specific channels (i.e., 802.11ac or wideband frame based systems) select a channel that has the entire emission bandwidth within the DFS band. If this is not possible, test the detection BW to the DFS band edge.
5. Starting at the center frequency of the UUT operating Channel, increase the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion specified in Table 3-3. Repeat this measurement in 1 MHz steps at frequencies 5 MHz below where the detection rate begins to fall. Record the highest frequency (denote as F_H) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies above F_H is not required to demonstrate compliance.
6. Starting at the center frequency of the EUT operating Channel, decrease the radar frequency in 1 MHz steps, repeating the above item 4 test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion. Record the lowest frequency (denote as F_L) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies below F_L is not required to demonstrate compliance.
7. The U-NII Detection Bandwidth is calculated as follows: $\text{U-NII Detection Bandwidth} = F_H - F_L$

8. The U-NII Detection Bandwidth must be at least 100% of the EUT transmitter 99% power, otherwise, the EUT does not comply with DFS requirements.

5.3.3. Test Result

Refer to Appendix A.3.

5.4. Initial Channel Availability Check Time Measurement

5.4.1. Test Limit

The EUT shall perform a Channel Availability Check to ensure that there is no radar operating on the channel. After power-up sequence, receive at least 1 minute on the intended operating frequency.

5.4.2. Test Procedure

1. The U-NII devices will be powered on and be instructed to operate on the appropriate U-NII Channel that must incorporate DFS functions. At the same time the EUT is powered on, the spectrum analyzer will be set to zero span mode with a 3 MHz RBW and 3 MHz VBW on the Channel occupied by the radar (Chr) with a 2.5 minute sweep time. The spectrum analyzer's sweep will be started at the same time power is applied to the U-NII device.
2. The EUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.
3. Confirm that the EUT initiates transmission on the channel. Measurement system showing its nominal noise floor is marker1.

5.4.3. Test Result

Refer to Appendix A.4.

5.5. Radar Burst at the Beginning of the Channel Availability Check Time Measurement

5.5.1. Test Limit

In beginning of the Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC on that channel.

5.5.2. Test Procedure

1. The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB occurs at the beginning of the Channel Availability Check Time.
2. The EUT is in completion power-up cycle (from T0 to T1). T1 denotes the instant when the EUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds. A single Burst of one of Short Pulse Radar Types 0-4 at DFS Detection Threshold + 1 dB will commence within a 6 second window starting at T1.
3. Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions will continue for 2.5 minutes after the radar Burst has been generated. Verify that during the 2.5 minutes measurement window no EUT transmissions occurred.

5.5.3. Test Result

Refer to Appendix A.5.

5.6. Radar Burst at the End of the Channel Availability Check Time Measurement

5.6.1. Test Limit

In the end of Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC on that channel.

5.6.2. Test Procedure

1. The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB occurs at the beginning of the Channel Availability Check Time.
2. The EUT is powered on at T0. T1 denotes the instant when the EUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds. A single Burst of one of Short Pulse Radar Types 0-4 at DFS Detection Threshold + 1 dB will commence within a 6 second window starting at T1 + 54 seconds.
3. Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions will continue for 2.5 minutes after the radar Burst has been generated. Verify that during the 2.5 minutes measurement window no EUT transmissions occurred.

5.6.3. Test Result

Refer to Appendix A.6.

5.7. In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Measurement

5.7.1. Test Limit

The EUT has In-Service Monitoring function to continuously monitor the radar signals. If the radar is detected, must leave the channel (Shutdown). The Channel Move Time to cease all transmissions on the current channel upon detection of a Radar Waveform above the DFS Detection Threshold within 10 sec. The total duration of Channel Closing Transmission Time is 260 ms, consisting of data signals and the aggregate of control signals, by a U-NII device during the Channel Move Time. The Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

5.7.2. Test Procedure

1. The test should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0.
2. When the radar burst with a level equal to the DFS Detection Threshold + 1 dB is generated on the Operating Channel of the U-NII device. A U-NII device operating as a Master Device will associate with the Client Device at Channel. Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test. At time T0 the Radar Waveform generator sends a Burst of pulses for each of the radar types at Detection Threshold + 1 dB.
3. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the EUT during the observation time (Channel Move Time).
4. Measurement of the aggregate duration of the Channel Closing Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (1.5 \text{ ms}) = S (12 \text{ sec}) / B (8000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is the sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C = N \times Dwell$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins showing a U-NII transmission and Dwell is the dwell time per bin.
5. Measure the EUT for more than 30 minutes following the channel close/move time to verify that the EUT does not resume any transmissions on this Channel.

5.7.3. Test Result

Refer to Appendix A.7.

5.8. Statistical Performance Check Measurement

5.8.1. Test Limit

The minimum percentage of successful detection requirements found in below table when a radar burst with a level equal to the DFS Detection Threshold + 1 dB is generated on the Operating Channel of the U-NII device (In- Service Monitoring).

Radar Type	Minimum Number of Trails	Detection Probability
0	30	$P_d \geq 60\%$
1	30(15 of test A and 15 of test B)	$P_d \geq 60\%$
2	30	$P_d \geq 60\%$
3	30	$P_d \geq 60\%$
4	30	$P_d \geq 60\%$
Aggregate (Radar Types 1-4)	120	$P_d \geq 80\%$
5	30	$P_d \geq 80\%$
6	30	$P_d \geq 70\%$
Note: The percentage of successful detection is calculated by: $(\text{Total Waveform Detections} / \text{Total Waveform Trails}) * 100 = \text{Probability of Detection Radar Waveform In}$ addition an aggregate minimum percentage of successful detection across all Short Pulse Radar Types 1-4 is required and is calculated as follows: $(P_{d1} + P_{d2} + P_{d3} + P_{d4}) / 4$.		

5.8.2. Test Procedure

1. Stream the MPEG test file from the Master Device to the Client Device on the test Channel for the entire period of the test.
2. At time T0 the Radar Waveform generator sends the individual waveform for each of the Radar Types 1-6, at levels equal to the DFS Detection Threshold + 1 dB, on the Operating Channel.
3. Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 10 seconds for Short Pulse Radar Types 0 to ensure detection occurs.
4. Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs.
5. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs.
6. The Minimum number of trails, minimum percentage of successful detection and the average minimum percentage of successful detection are found in below table


5.8.3. Test Result

Refer to Appendix A.8.


Appendix A - Test Result

A.1 Calibration Test Result


Test Site	WJ-SR8	Test Engineer	Jake Lan
Test Date	2026-01-31	Test Item	Radar Waveform Calibration

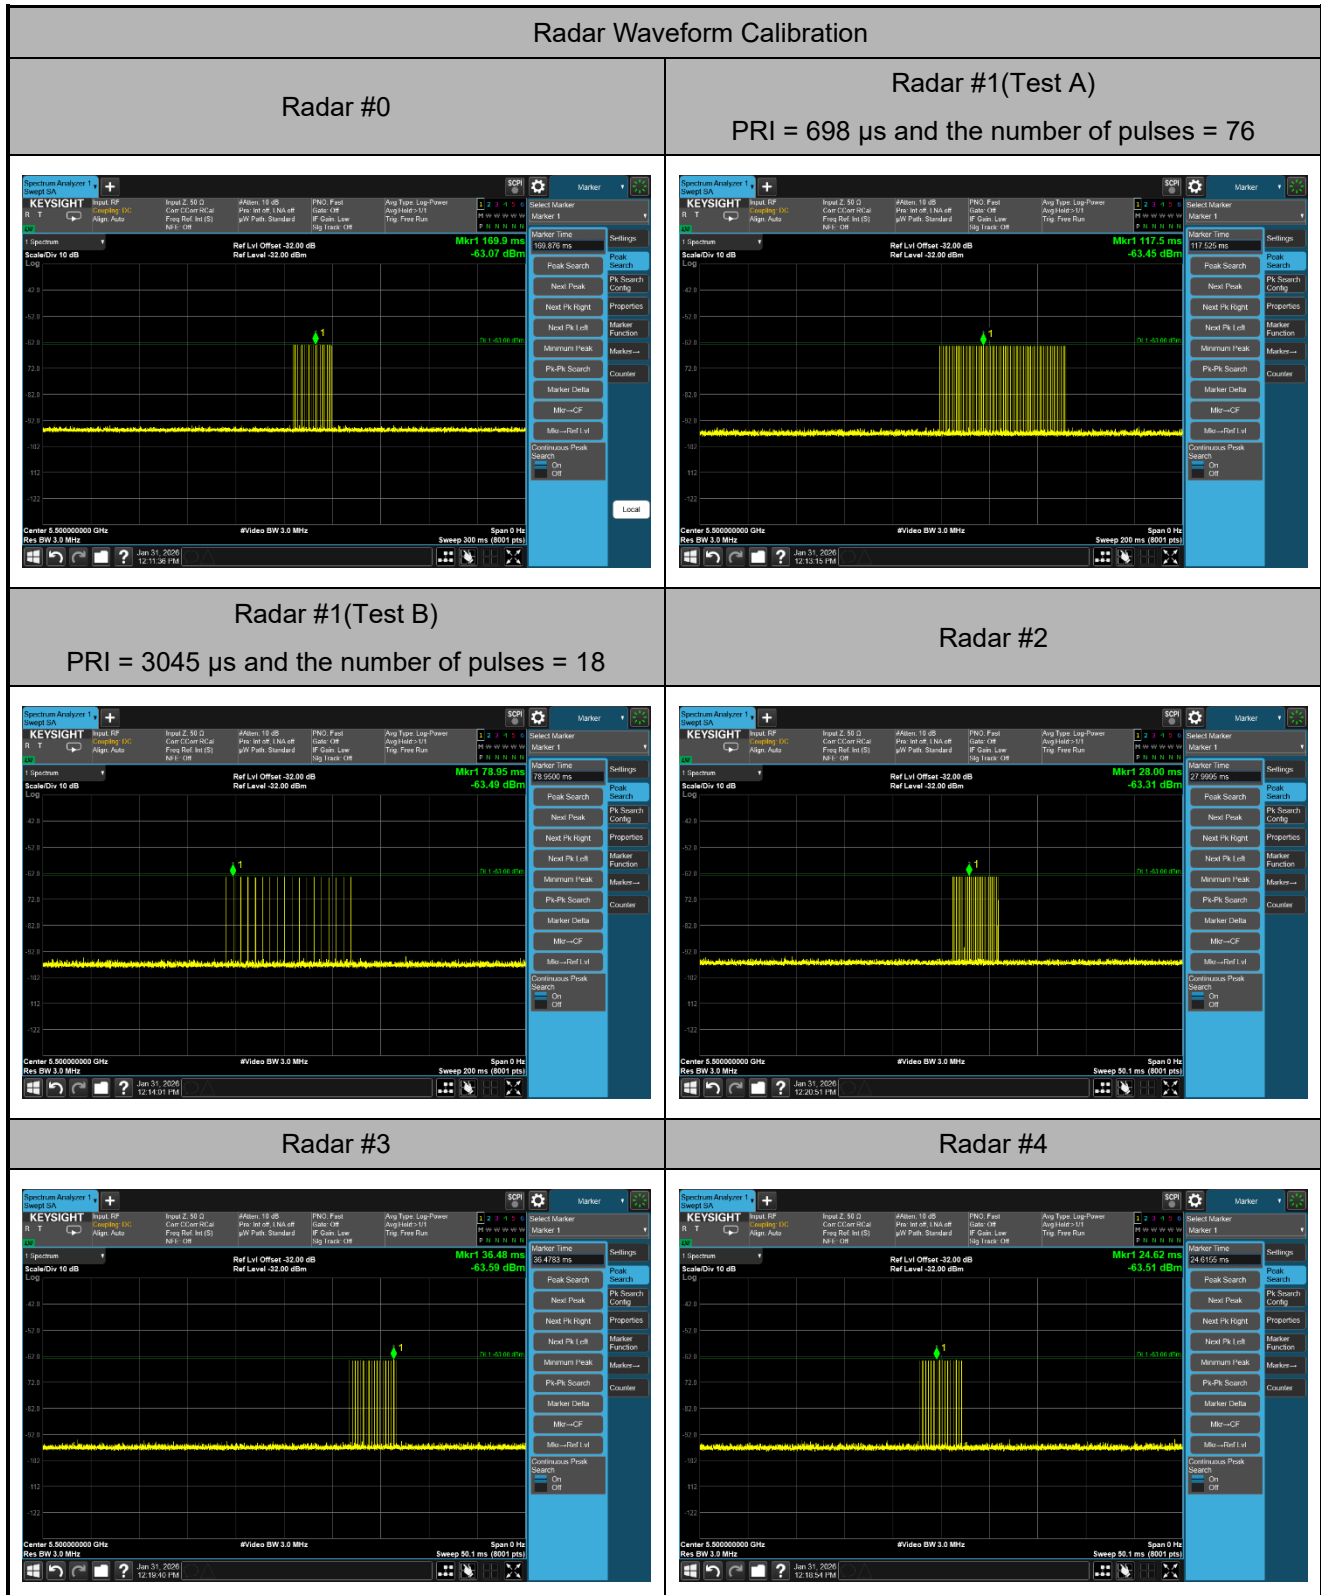


Radars #5

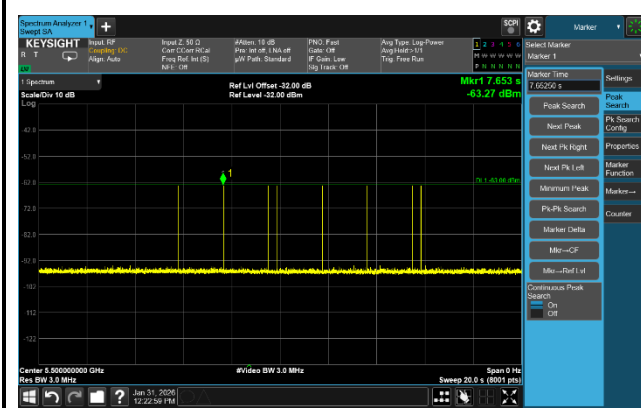


Radars #6

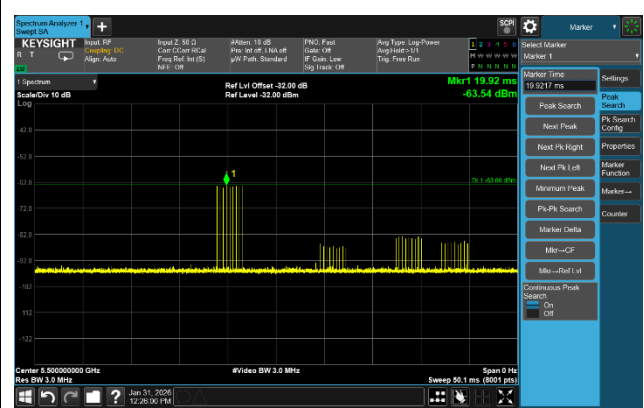


Radars #3 (For Statistical Performance Check)

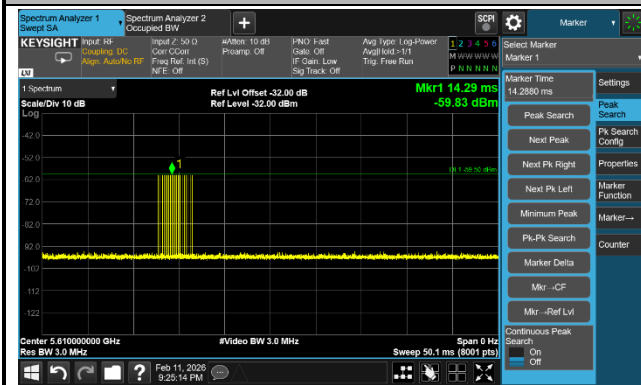

Radars #4 (For Statistical Performance Check)

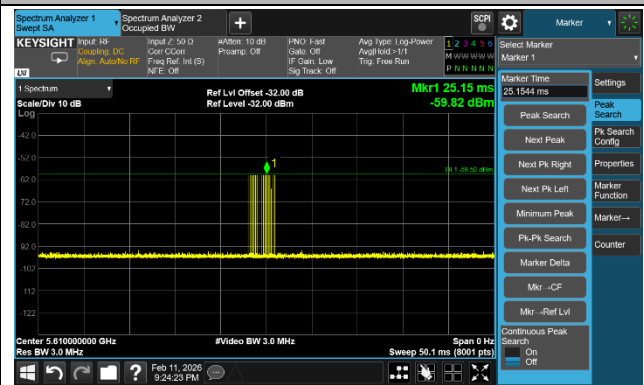


Radars #5 (For Statistical Performance Check)

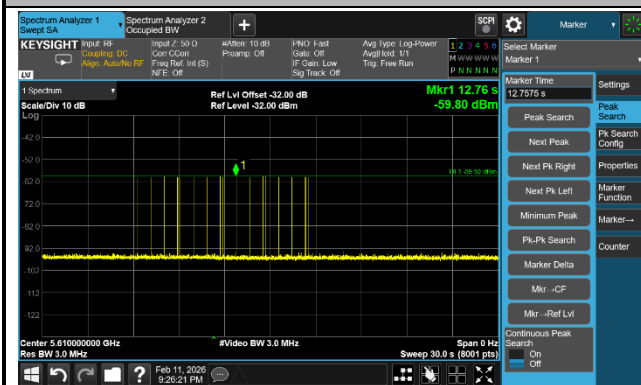

A.2 Channel Loading Test Result

Test Site	WJ-SR8	Test Engineer	Jake Lan
Test Date	2026-01-31 ~ 2026-02-11	Test Item	Channel Loading

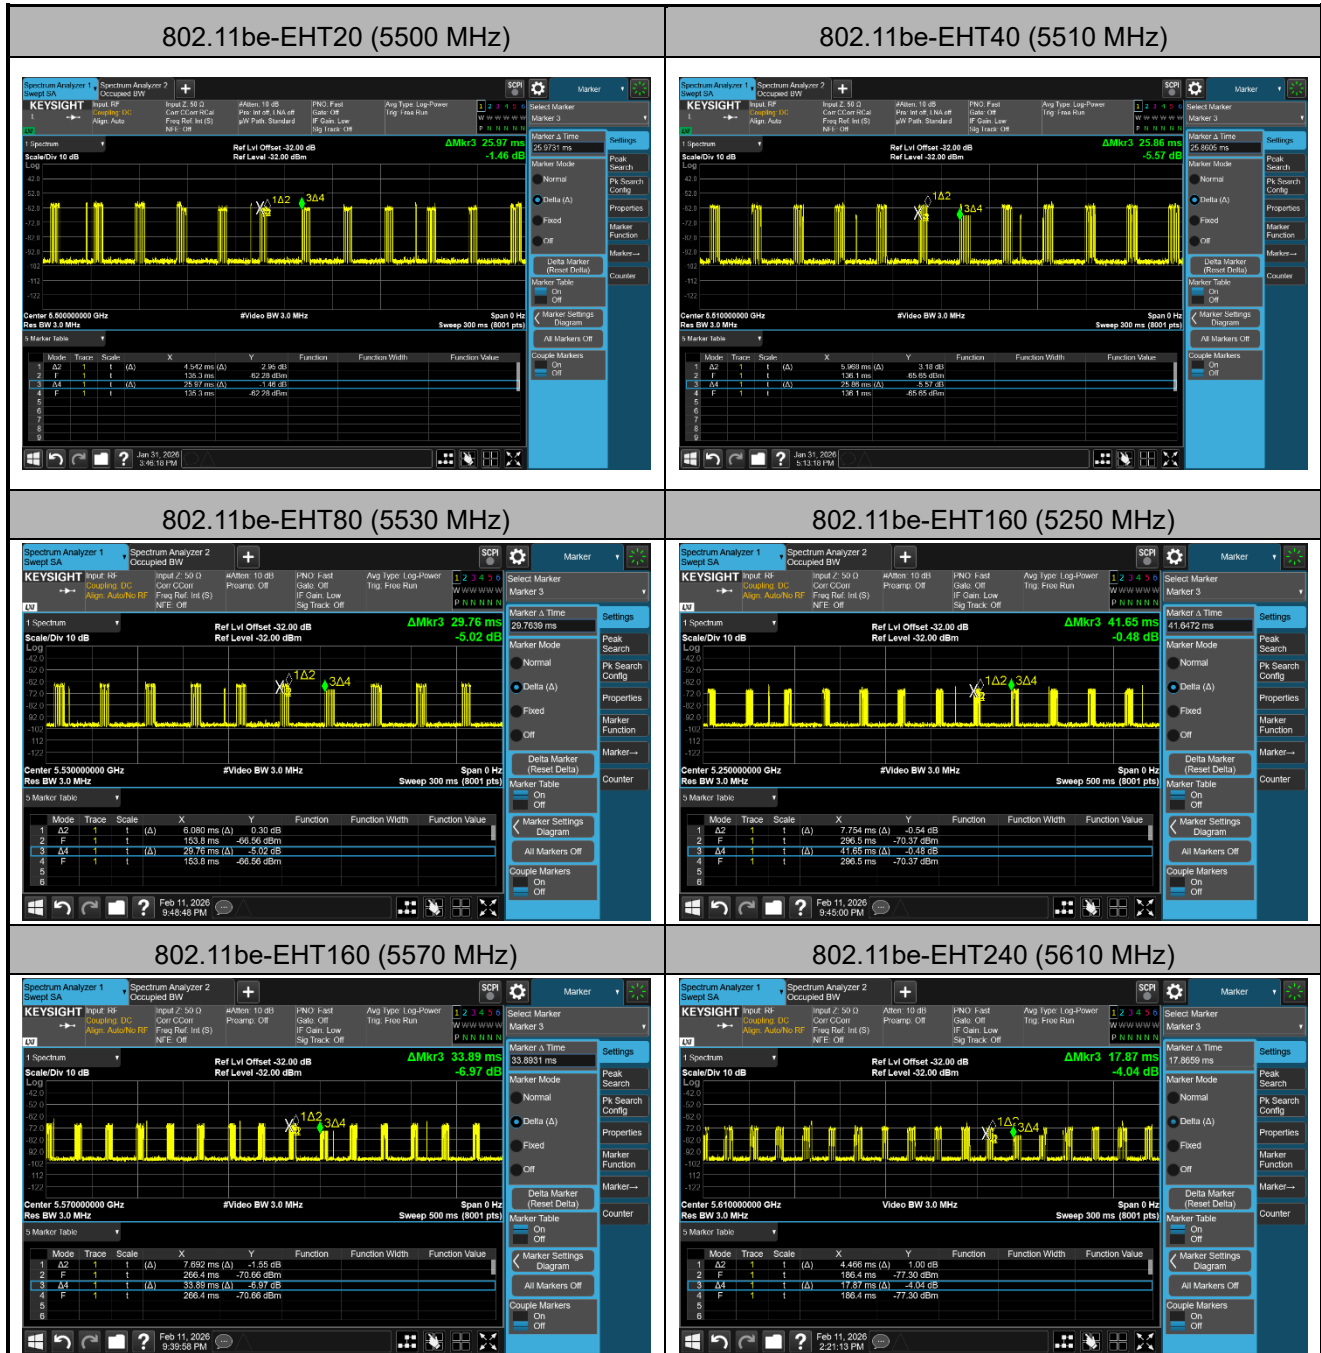

Test Mode	Test Frequency	Packet ratio	Requirement ratio	Test Result
802.11be-EHT20	5500 MHz	17.49%	$\geq 17\%$	Pass
802.11be-EHT40	5510 MHz	23.08%	$\geq 17\%$	Pass
802.11be-EHT80	5530 MHz	20.43%	$\geq 17\%$	Pass
802.11be-EHT160	5250 MHz	18.62%	$\geq 17\%$	Pass
802.11be-EHT160	5570 MHz	22.70%	$\geq 17\%$	Pass
802.11be-EHT240	5610 MHz	24.99%	$\geq 17\%$	Pass

Note: System testing was performed with the designated iperf test file. This file is used by IP and Frame based systems for loading the test channel during the In-service compliance testing of the U-NII device.

Packet ratio = Time On / (Time On + Off Time).

A.3 NII Detection Bandwidth Test Result

Test Site	WJ-SR8	Test Engineer	Jake Lan
Test Date	2026-01-31		
Test Item	Detection Bandwidth (802.11be-EHT20 mode - 5500 MHz)		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490 F _L	1	1	1	1	1	1	1	1	1	1	100
5495	1	1	1	1	1	1	1	1	1	1	100
5500	1	1	1	1	1	1	1	1	1	1	100
5505	1	1	1	1	1	1	1	1	1	1	100
5510 F _H	1	1	1	1	1	1	1	1	1	1	100

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5500 MHz. The 99% channel bandwidth is 19.080 MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = $F_H - F_L = 5510 \text{ MHz} - 5490 \text{ MHz} = 20 \text{ MHz}$

Note 3: NII Detection Bandwidth Min. Limit (MHz): $19.0.080 \text{ MHz} \times 100\% = 19.080 \text{ MHz}$.

Test Site	WJ-SR8	Test Engineer	Jake Lan
Test Date	2026-02-08		
Test Item	Detection Bandwidth (802.11be-EHT40 mode - 5510 MHz)		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490 F _L	1	1	1	1	1	1	1	1	1	1	100
5495	1	1	1	1	1	1	1	1	1	1	100
5500	1	1	1	1	1	1	1	1	1	1	100
5505	1	1	1	1	1	1	1	1	1	1	100
5510	1	1	1	1	1	1	1	1	1	1	100
5515	1	1	1	1	1	1	1	1	1	1	100
5520	1	1	1	1	1	1	1	1	1	1	100
5525	1	1	1	1	1	1	1	1	1	1	100
5530 F _H	1	1	1	1	1	1	1	1	1	1	100

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5510 MHz. The 99% channel bandwidth is 37.928 MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = $F_H - F_L = 5530 \text{ MHz} - 5490 \text{ MHz} = 40 \text{ MHz}$.

Note 3: NII Detection Bandwidth Min. Limit (MHz): $37.928 \text{ MHz} \times 100\% = 37.928 \text{ MHz}$.

Test Site	WJ-SR8	Test Engineer	Jake Lan
Test Date	22026-02-08		
Test Item	Detection Bandwidth (802.11be-EHT80 mode - 5530 MHz)		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490 F _L	1	1	1	1	1	1	1	1	1	1	100
5495	1	1	1	1	1	1	1	1	1	1	100
5500	1	1	1	1	1	1	1	1	1	1	100
5505	1	1	1	1	1	1	1	1	1	1	100
5510	1	1	1	1	1	1	1	1	1	1	100
5515	1	1	1	1	1	1	1	1	1	1	100
5520	1	1	1	1	1	1	1	1	1	1	100
5525	1	1	1	1	1	1	1	1	1	1	100
5530	1	1	1	1	1	1	1	1	1	1	100
5535	1	1	1	1	1	1	1	1	1	1	100
5540	1	1	1	1	1	1	1	1	1	1	100
5545	1	1	1	1	1	1	1	1	1	1	100
5550	1	1	1	1	1	1	1	1	1	1	100
5555	1	1	1	1	1	1	1	1	1	1	100
5560	1	1	1	1	1	1	1	1	1	1	100
5565	1	1	1	1	1	1	1	1	1	1	100
5570 F _H	1	1	1	1	1	1	1	1	1	1	100

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5530 MHz. The 99% channel bandwidth is 77.419 MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = $F_H - F_L = 5570 \text{ MHz} - 5490 \text{ MHz} = 80 \text{ MHz}$.

Note 3: NII Detection Bandwidth Min. Limit (MHz): $77.419 \text{ MHz} \times 100\% = 77.419 \text{ MHz}$.

Test Site	WJ-SR8	Test Engineer	Jake Lan
Test Date	2026-02-26		
Test Item	Detection Bandwidth (802.11be-EHT160 mode - 5250 MHz)		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5250 F _L	1	1	1	1	1	1	1	1	1	1	100
5255	1	1	1	1	1	1	1	1	1	1	100
5260	1	1	1	1	1	1	1	1	1	1	100
5265	1	1	1	1	1	1	1	1	1	1	100
5270	1	1	1	1	1	1	1	1	1	1	100
5275	1	1	1	1	1	1	1	1	1	1	100
5280	1	1	1	1	1	1	1	1	1	1	100
5285	1	1	1	1	1	1	1	1	1	1	100
5290	1	1	1	1	1	1	1	1	1	1	100
5295	1	1	1	1	1	1	1	1	1	1	100
5300	1	1	1	1	1	1	1	1	1	1	100
5305	1	1	1	1	1	1	1	1	1	1	100
5310	1	1	1	1	1	1	1	1	1	1	100
5315	1	1	1	1	1	1	1	1	1	1	100
5320	1	1	1	1	1	1	1	1	1	1	100
5325	1	1	1	1	1	1	1	1	1	1	100
5329 F _H	1	1	1	1	1	1	1	1	1	1	100

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5250 MHz. The 99% channel bandwidth within U-NII Band-2 A is 78.60 MHz ($99\% \text{ BW} / 2 = 157.20 \text{ MHz} / 2 = 78.60 \text{ MHz}$). (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = $F_H - F_L = 5329 \text{ MHz} - 5250 \text{ MHz} = 79 \text{ MHz}$.

Note 3: NII Detection Bandwidth Min. Limit (MHz): $78.60 \text{ MHz} \times 100\% = 78.60 \text{ MHz}$.



Test Site	WJ-SR8	Test Engineer	Jake Lan
Test Date	2026-02-10		
Test Item	Detection Bandwidth (802.11be-EHT160 mode - 5570 MHz)		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490 F _L	1	1	1	1	1	1	1	1	1	1	100
5495	1	1	1	1	1	1	1	1	1	1	100
5505	1	1	1	1	1	1	1	1	1	1	100
5510	1	1	1	1	1	1	1	1	1	1	100
5515	1	1	1	1	1	1	1	1	1	1	100
5520	1	1	1	1	1	1	1	1	1	1	100
5525	1	1	1	1	1	1	1	1	1	1	100
5530	1	1	1	1	1	1	1	1	1	1	100
5535	1	1	1	1	1	1	1	1	1	1	100
5540	1	1	1	1	1	1	1	1	1	1	100
5545	1	1	1	1	1	1	1	1	1	1	100
5550	1	1	1	1	1	1	1	1	1	1	100
5555	1	1	1	1	1	1	1	1	1	1	100
5560	1	1	1	1	1	1	1	1	1	1	100
5565	1	1	1	1	1	1	1	1	1	1	100
5570	1	1	1	1	1	1	1	1	1	1	100
5575	1	1	1	1	1	1	1	1	1	1	100
5580	1	1	1	1	1	1	1	1	1	1	100
5585	1	1	1	1	1	1	1	1	1	1	100
5590	1	1	1	1	1	1	1	1	1	1	100
5595	1	1	1	1	1	1	1	1	1	1	100
5600	1	1	1	1	1	1	1	1	1	1	100
5605	1	1	1	1	1	1	1	1	1	1	100
5610	1	1	1	1	1	1	1	1	1	1	100
5615	1	1	1	1	1	1	1	1	1	1	100
5620	1	1	1	1	1	1	1	1	1	1	100
5625	1	1	1	1	1	1	1	1	1	1	100
5630	1	1	1	1	1	1	1	1	1	1	100
5635	1	1	1	1	1	1	1	1	1	1	100
5640	1	1	1	1	1	1	1	1	1	1	100
5645	1	1	1	1	1	1	1	1	1	1	100
5650 F _H	1	1	1	1	1	1	1	1	1	1	100

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5570 MHz. The 99% channel bandwidth is 156.70 MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = $F_H - F_L = 5650 \text{ MHz} - 5490 \text{ MHz} = 160 \text{ MHz}$

Note 3: NII Detection Bandwidth Min. Limit (MHz): $156.70 \text{ MHz} \times 100\% = 156.70 \text{ MHz}$.



Test Site	WJ-SR8	Test Engineer	Jake Lan
Test Date	2026-02-11		
Test Item	Detection Bandwidth (802.11be-EHT240 mode - 5610 MHz)		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490 FL	1	1	1	1	1	1	1	1	1	1	100
5495	1	1	1	1	1	1	1	1	1	1	100
5505	1	1	1	1	1	1	1	1	1	1	100
5510	1	1	1	1	1	1	1	1	1	1	100
5515	1	1	1	1	1	1	1	1	1	1	100
5520	1	1	1	1	1	1	1	1	1	1	100
5525	1	1	1	1	1	1	1	1	1	1	100
5530	1	1	1	1	1	1	1	1	1	1	100
5535	1	1	1	1	1	1	1	1	1	1	100
5540	1	1	1	1	1	1	1	1	1	1	100
5545	1	1	1	1	1	1	1	1	1	1	100
5550	1	1	1	1	1	1	1	1	1	1	100
5555	1	1	1	1	1	1	1	1	1	1	100
5560	1	1	1	1	1	1	1	1	1	1	100
5565	1	1	1	1	1	1	1	1	1	1	100
5570	1	1	1	1	1	1	1	1	1	1	100
5575	1	1	1	1	1	1	1	1	1	1	100
5580	1	1	1	1	1	1	1	1	1	1	100
5585	1	1	1	1	1	1	1	1	1	1	100
5590	1	1	1	1	1	1	1	1	1	1	100
5595	1	1	1	1	1	1	1	1	1	1	100
5600	1	1	1	1	1	1	1	1	1	1	100
5605	1	1	1	1	1	1	1	1	1	1	100
5610	1	1	1	1	1	1	1	1	1	1	100
5615	1	1	1	1	1	1	1	1	1	1	100
5620	1	1	1	1	1	1	1	1	1	1	100
5625	1	1	1	1	1	1	1	1	1	1	100
5630	1	1	1	1	1	1	1	1	1	1	100
5635	1	1	1	1	1	1	1	1	1	1	100
5640	1	1	1	1	1	1	1	1	1	1	100
5645	1	1	1	1	1	1	1	1	1	1	100
5650	1	1	1	1	1	1	1	1	1	1	100

5655	1	1	1	1	1	1	1	1	1	1	100
5660	1	1	1	1	1	1	1	1	1	1	100
5665	1	1	1	1	1	1	1	1	1	1	100
5670	1	1	1	1	1	1	1	1	1	1	100
5675	1	1	1	1	1	1	1	1	1	1	100
5680	1	1	1	1	1	1	1	1	1	1	100
5685	1	1	1	1	1	1	1	1	1	1	100
5690	1	1	1	1	1	1	1	1	1	1	100
5695	1	1	1	1	1	1	1	1	1	1	100
5700	1	1	1	1	1	1	1	1	1	1	100
5705	1	1	1	1	1	1	1	1	1	1	100
5710	1	1	1	1	1	1	1	1	1	1	100
5715	1	1	1	1	1	1	1	1	1	1	100
5720	1	1	1	1	1	1	1	1	1	1	100
5725	1	1	1	1	1	1	1	1	1	1	100
5730 F _H	1	1	1	1	1	1	1	1	1	1	100


Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5570 MHz. The 99% channel bandwidth is 237.93 MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = $F_H - F_L = 5730 \text{ MHz} - 5490 \text{ MHz} = 240 \text{ MHz}$

Note 3: NII Detection Bandwidth Min. Limit (MHz): $237.93 \text{ MHz} \times 100\% = 237.93 \text{ MHz}$.

A.4 Initial Channel Availability Check Time Test Result


Test Site	WJ-SR8	Test Engineer	Jake Lan
Test Date	2026-01-31		
Test Item	Initial Channel Availability Check Time (802.11be-EHT20 mode - 5500 MHz)		

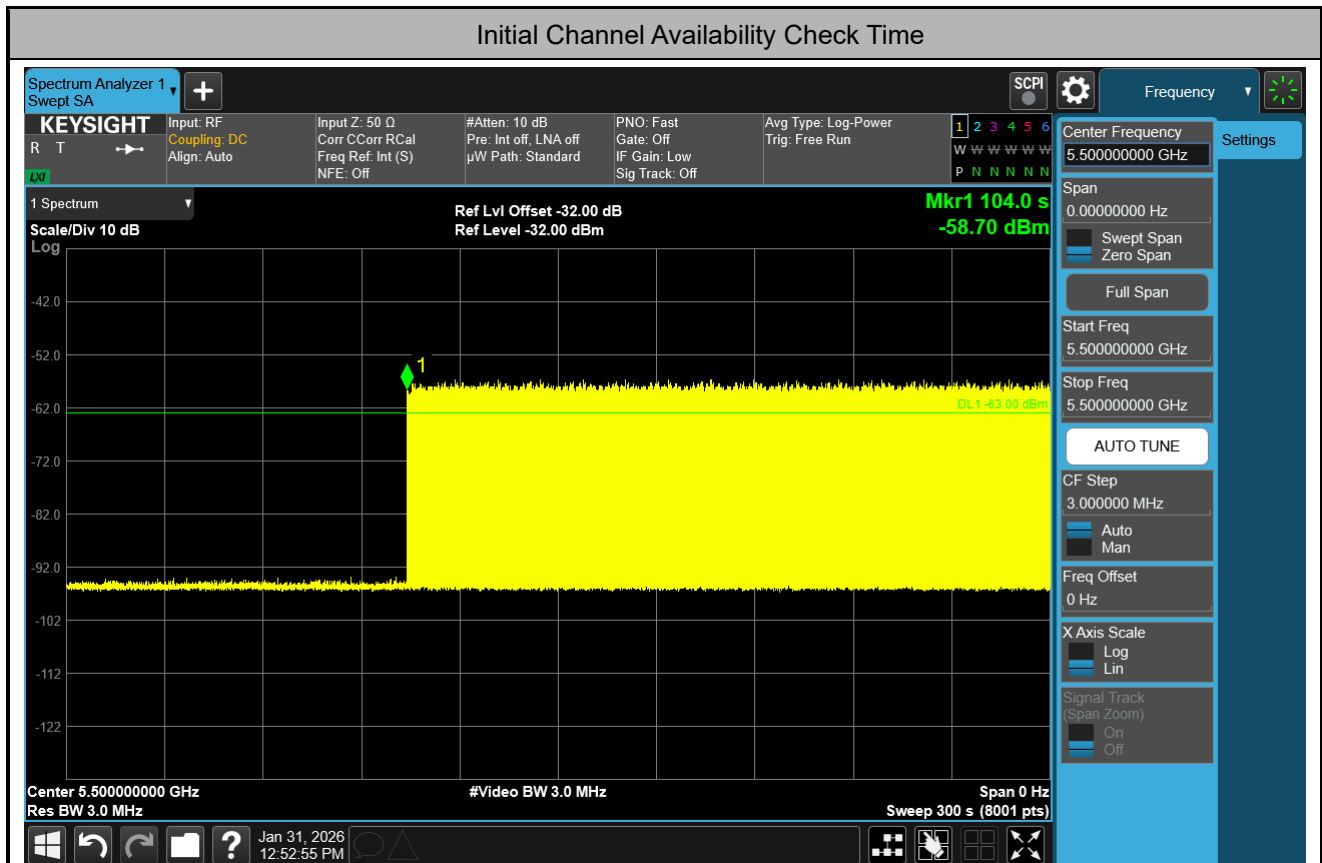

Note: The EUT does not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle (44.0 sec). Initial beacons/data transmissions are indicated by marker 1 (104.0 sec).


A.5 Radar Burst at the Beginning of the Channel Availability Check Time Test Result

Test Site	WJ-SR8	Test Engineer	Jake Lan
Test Date	2026-01-31		
Test Item	Beginning of the Channel Availability Check Time (802.11be-EHT20 mode - 5500 MHz)		

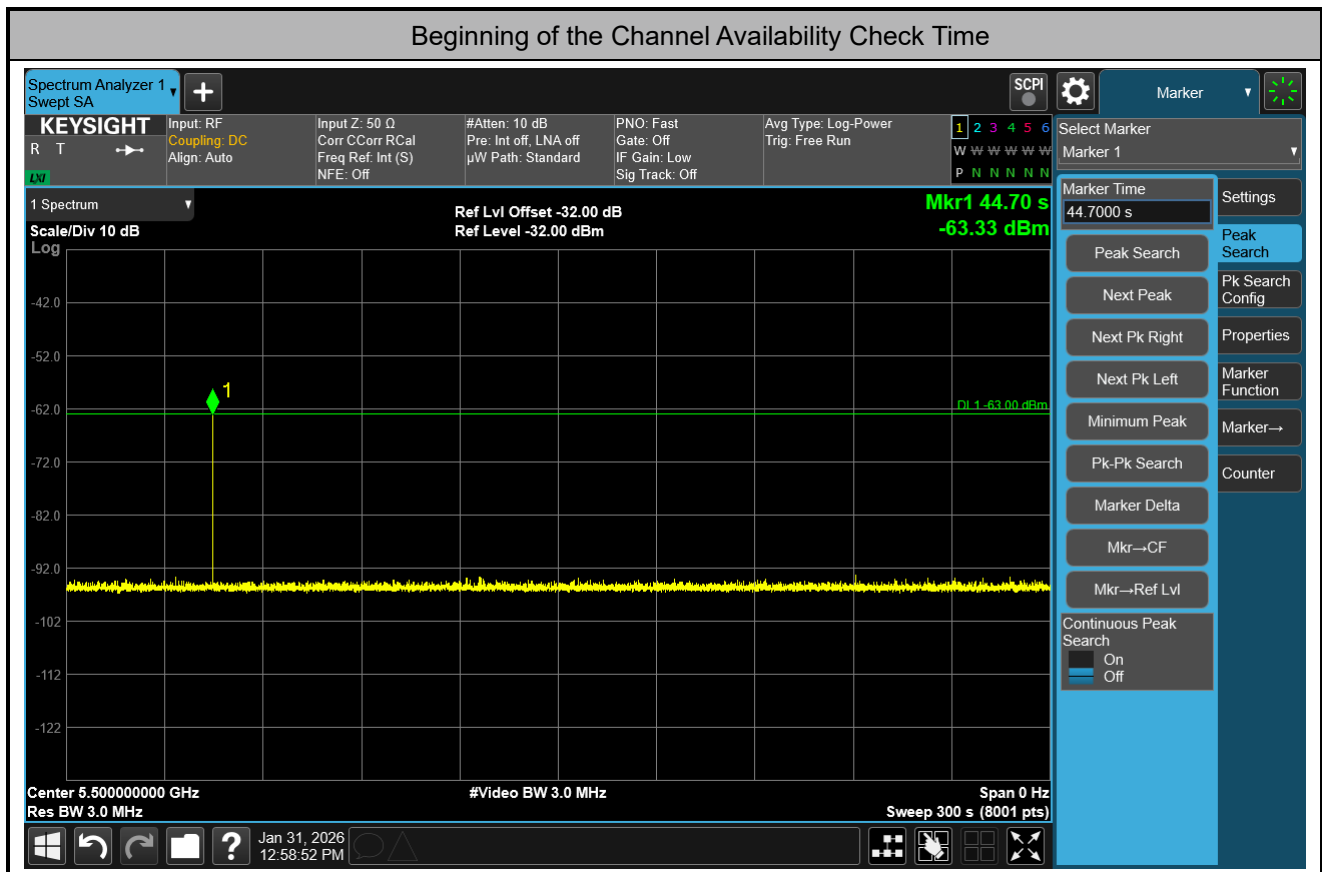


A.6 Radar Burst at the End of the Channel Availability Check Time Test Result

Test Site	WJ-SR8	Test Engineer	Jake Lan
Test Date	2026-01-31		
Test Item	End of the Channel Availability Check Time (802.11be-EHT20 mode - 5500 MHz)		

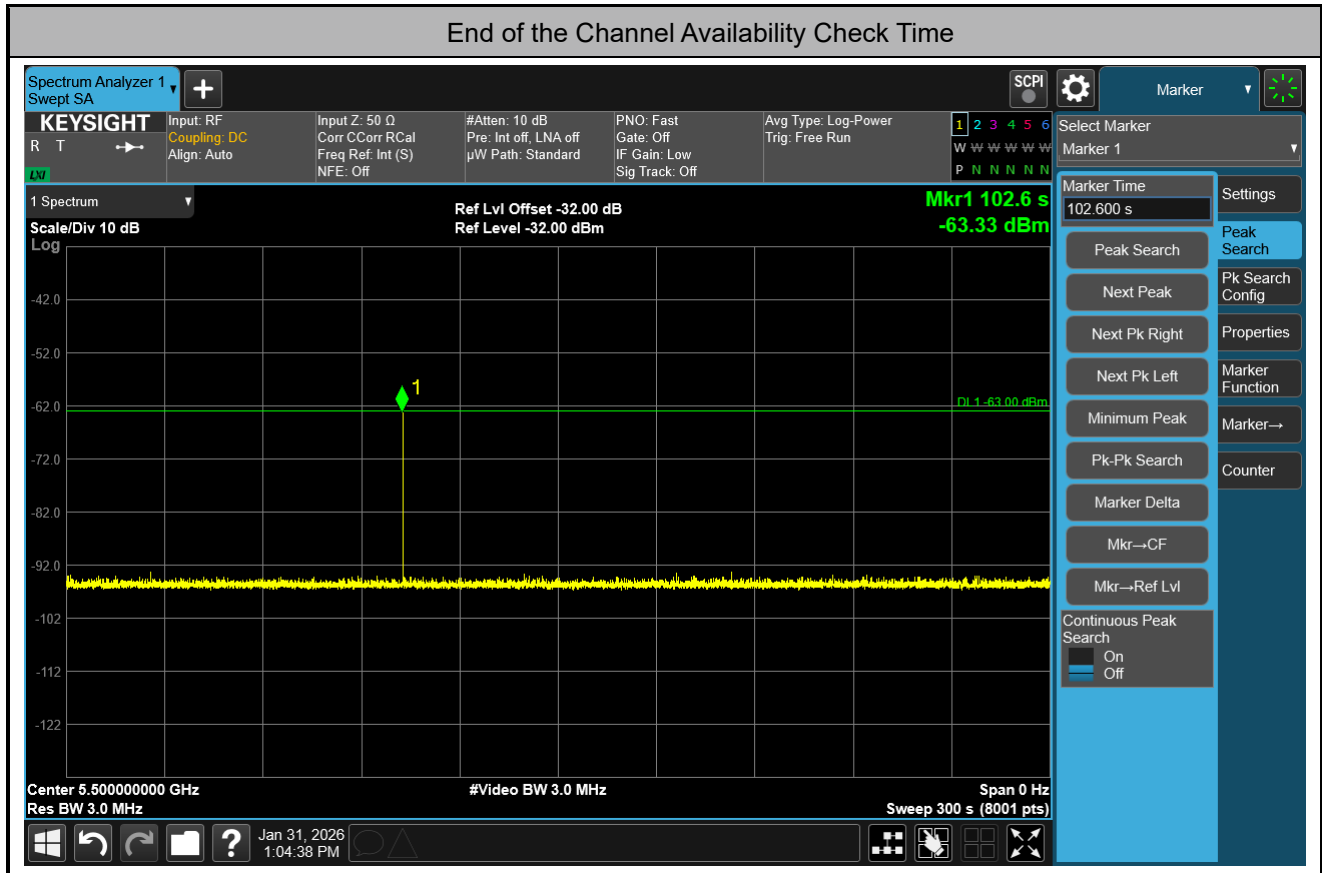

A.7 In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Test Result

Test Site	WJ-SR8	Test Engineer	Jake Lan
Test Date	2026-01-31		
Test Item	Channel Move Time and Channel Closing Transmission Time (802.11be-EHT160 mode - 5250 MHz)		

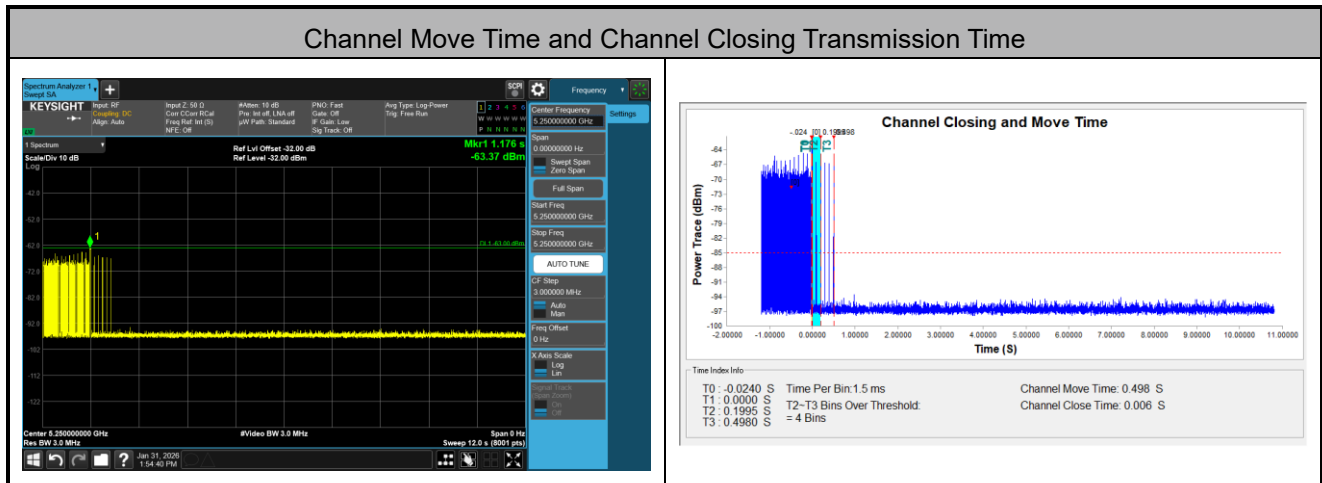



Non-Occupancy Period



Parameter	Test Result	Limit
Channel Move Time (s)	0.498 s	<10 s
Channel Closing Transmission Time (ms) (Note)	6 ms	< 60 ms
Non-Occupancy Period (min)	≥ 30 min	≥ 30 min

Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.




Test Site	WJ-SR8	Test Engineer	Jake Lan
Test Date	2026-01-31		
Test Item	Channel Move Time and Channel Closing Transmission Time (802.11be-EHT160 mode - 5570 MHz)		

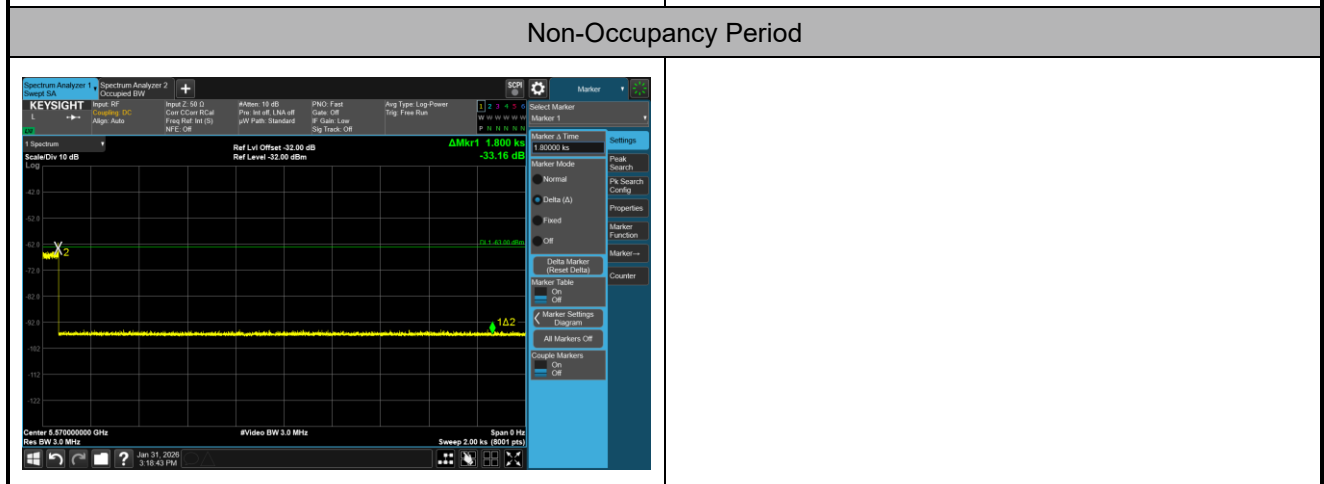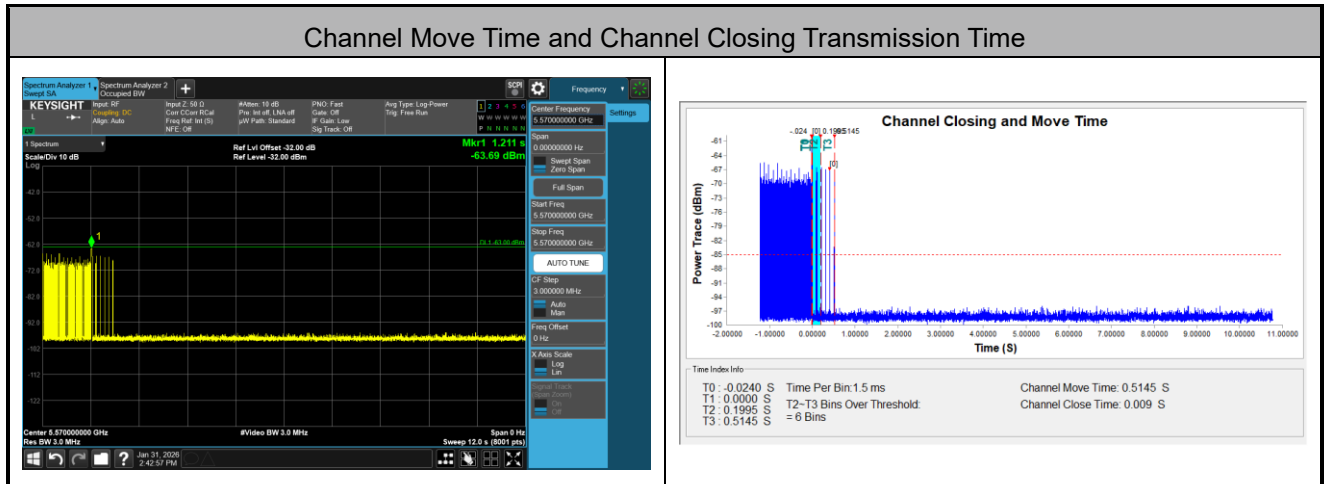

Parameter	Test Result	Limit
Channel Move Time (s)	0.5145 s	<10 s
Channel Closing Transmission Time (ms) (Note)	9 ms	< 60 ms
Non-Occupancy Period (min)	≥ 30 min	≥ 30 min

Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Test Site	WJ-SR8	Test Engineer	Jake Lan
Test Date	2026-02-11		
Test Item	Channel Move Time and Channel Closing Transmission Time (802.11be-EHT240 mode - 5610 MHz)		

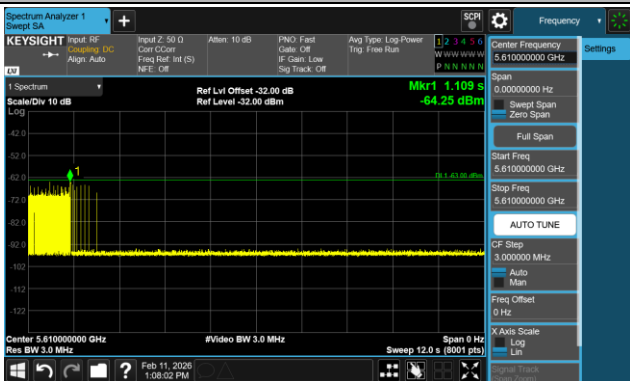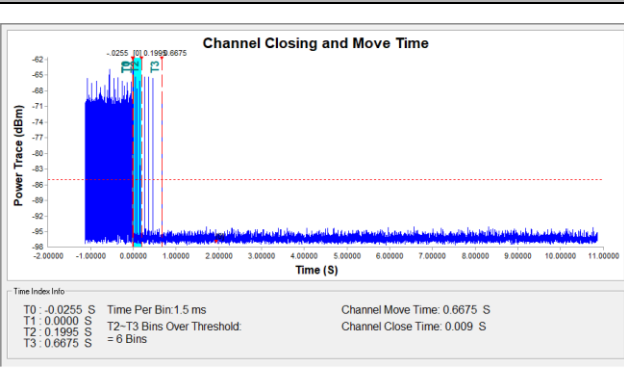Channel Move Time and Channel Closing Transmission Time														
	 Time Index Info: <table><tr><td>T0: -0.0255 S</td><td>Time Per Bin: 1.5 ms</td><td>Channel Move Time: 0.6675 S</td></tr><tr><td>T1: 0.0000 S</td><td>T2-T3 Bins Over Threshold: = 6 Bins</td><td>Channel Close Time: 0.009 S</td></tr><tr><td>T2: 0.1995 S</td><td></td><td></td></tr><tr><td>T3: 0.6675 S</td><td></td><td></td></tr></table>		T0: -0.0255 S	Time Per Bin: 1.5 ms	Channel Move Time: 0.6675 S	T1: 0.0000 S	T2-T3 Bins Over Threshold: = 6 Bins	Channel Close Time: 0.009 S	T2: 0.1995 S			T3: 0.6675 S		
T0: -0.0255 S	Time Per Bin: 1.5 ms	Channel Move Time: 0.6675 S												
T1: 0.0000 S	T2-T3 Bins Over Threshold: = 6 Bins	Channel Close Time: 0.009 S												
T2: 0.1995 S														
T3: 0.6675 S														
Non-Occupancy Period														
														
Parameter	Test Result	Limit												
Channel Move Time (s)	0.6675 s	<10 s												
Channel Closing Transmission Time (ms) (Note)	9 ms	< 60 ms												
Non-Occupancy Period (min)	≥ 30 min	≥ 30 min												
Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.														

A.8 Statistical Performance Check

Test Site	WJ-SR8	Test Engineer	Jake Lan
Test Date	2026-01-31		
Test Item	Radar Statistical Performance Check (802.11be-EHT20 - 5500 MHz)		

Radar Type 1-4 - Radar Statistical Performance								
Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect
0	5504	1	5504	1	5494	1	5510	1
1	5498	1	5508	1	5510	1	5495	0
2	5508	1	5494	1	5500	0	5505	0
3	5502	1	5505	1	5493	1	5506	1
4	5500	1	5507	1	5501	1	5498	0
5	5506	1	5510	1	5495	1	5507	1
6	5493	1	5497	1	5492	0	5504	1
7	5509	1	5503	1	5497	1	5499	1
8	5507	1	5502	1	5502	1	5508	1
9	5496	1	5498	0	5506	1	5497	1
10	5494	1	5509	1	5499	1	5493	0
11	5495	1	5496	1	5498	1	5496	1
12	5491	1	5506	1	5491	1	5494	1
13	5499	1	5492	0	5505	1	5501	1
14	5501	1	5499	1	5508	1	5491	1
15	5492	1	5493	1	5504	1	5500	0
16	5497	1	5500	1	5496	0	5492	1
17	5510	1	5501	1	5503	1	5502	0
18	5503	0	5491	1	5507	1	5509	0
19	5505	1	5495	1	5509	1	5503	1
20	5506	1	5491	1	5508	1	5496	1
21	5504	1	5501	1	5503	1	5501	1
22	5506	1	5497	1	5509	1	5499	1
23	5503	1	5508	1	5510	1	5494	1
24	5499	1	5496	1	5504	0	5509	0
25	5493	1	5494	1	5500	1	5496	1
26	5504	1	5506	1	5501	1	5492	1
27	5498	0	5502	1	5495	1	5502	1



Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect
28	5499	1	5502	1	5496	1	5503	0
29	5490	0	5490	1	5490	1	5490	1
Probability:	90.0%		93.3%		86.7%		70.0%	
Aggregate:	85.0% (>80%)							

Radar Type 1 - Radar Waveform							Radar Type 2 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 1	1.0	938.0	57	53466.0	Download	0	Type 2	3.2	179.0	26	4654.0
Download	1	Type 1	1.0	698.0	76	53048.0	Download	1	Type 2	1.1	207.0	23	4761.0
Download	2	Type 1	1.0	618.0	86	53148.0	Download	2	Type 2	2.1	230.0	24	5520.0
Download	3	Type 1	1.0	538.0	99	53282.0	Download	3	Type 2	4.8	200.0	29	5800.0
Download	4	Type 1	1.0	878.0	61	53558.0	Download	4	Type 2	3.9	214.0	28	5992.0
Download	5	Type 1	1.0	3066.0	18	55188.0	Download	5	Type 2	2.9	222.0	26	5772.0
Download	6	Type 1	1.0	638.0	83	52954.0	Download	6	Type 2	3.2	204.0	26	5304.0
Download	7	Type 1	1.0	918.0	58	53244.0	Download	7	Type 2	2.5	192.0	25	4800.0
Download	8	Type 1	1.0	838.0	63	52794.0	Download	8	Type 2	3.1	164.0	26	4264.0
Download	9	Type 1	1.0	858.0	62	53196.0	Download	9	Type 2	1.2	156.0	23	3588.0
Download	10	Type 1	1.0	798.0	67	53466.0	Download	10	Type 2	3.9	210.0	27	5670.0
Download	11	Type 1	1.0	718.0	74	53132.0	Download	11	Type 2	4.6	201.0	29	5829.0
Download	12	Type 1	1.0	578.0	92	53176.0	Download	12	Type 2	3.2	162.0	26	4212.0
Download	13	Type 1	1.0	598.0	89	53222.0	Download	13	Type 2	2.2	197.0	25	4925.0
Download	14	Type 1	1.0	558.0	95	53010.0	Download	14	Type 2	4.5	163.0	29	4727.0
Download	15	Type 1	1.0	2536.0	21	53256.0	Download	15	Type 2	3.0	203.0	26	5278.0
Download	16	Type 1	1.0	966.0	55	53130.0	Download	16	Type 2	5.0	168.0	29	4872.0
Download	17	Type 1	1.0	827.0	64	52928.0	Download	17	Type 2	2.4	217.0	25	5425.0
Download	18	Type 1	1.0	2501.0	22	55022.0	Download	18	Type 2	2.9	191.0	26	4966.0
Download	19	Type 1	1.0	2595.0	21	54495.0	Download	19	Type 2	2.3	166.0	25	4150.0
Download	20	Type 1	1.0	1114.0	48	53472.0	Download	20	Type 2	3.7	150.0	27	4050.0
Download	21	Type 1	1.0	1302.0	41	53382.0	Download	21	Type 2	2.2	176.0	25	4400.0
Download	22	Type 1	1.0	3045.0	18	54810.0	Download	22	Type 2	4.9	195.0	29	5655.0
Download	23	Type 1	1.0	1624.0	33	53592.0	Download	23	Type 2	2.9	202.0	26	5252.0
Download	24	Type 1	1.0	2878.0	19	54682.0	Download	24	Type 2	2.5	178.0	25	4450.0
Download	25	Type 1	1.0	1027.0	52	53404.0	Download	25	Type 2	1.1	206.0	23	4738.0
Download	26	Type 1	1.0	2485.0	22	54670.0	Download	26	Type 2	3.8	155.0	27	4185.0
Download	27	Type 1	1.0	1600.0	33	52800.0	Download	27	Type 2	4.7	157.0	29	4553.0
Download	28	Type 1	1.0	1172.0	46	53912.0	Download	28	Type 2	2.4	224.0	25	5600.0
Download	29	Type 1	1.0	1177.0	45	52965.0	Download	29	Type 2	4.2	159.0	28	4452.0



Radar Type 3 - Radar Waveform							Radar Type 4 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 3	8.2	355.0	17	6035.0	Download	0	Type 4	16.0	355.0	14	4970.0
Download	1	Type 3	6.1	487.0	16	7792.0	Download	1	Type 4	11.3	487.0	12	5844.0
Download	2	Type 3	7.1	344.0	16	5504.0	Download	2	Type 4	13.5	344.0	13	4472.0
Download	3	Type 3	9.8	288.0	18	5184.0	Download	3	Type 4	19.4	288.0	16	4608.0
Download	4	Type 3	8.9	230.0	18	4140.0	Download	4	Type 4	17.5	230.0	15	3450.0
Download	5	Type 3	7.9	432.0	17	7344.0	Download	5	Type 4	15.3	432.0	14	6048.0
Download	6	Type 3	8.2	207.0	17	3519.0	Download	6	Type 4	15.9	207.0	14	2898.0
Download	7	Type 3	7.5	443.0	17	7531.0	Download	7	Type 4	14.3	443.0	13	5759.0
Download	8	Type 3	8.1	439.0	17	7463.0	Download	8	Type 4	15.8	439.0	14	6146.0
Download	9	Type 3	6.2	223.0	16	3568.0	Download	9	Type 4	11.5	223.0	12	2676.0
Download	10	Type 3	8.9	208.0	18	3744.0	Download	10	Type 4	17.4	208.0	15	3120.0
Download	11	Type 3	9.6	463.0	18	8334.0	Download	11	Type 4	19.0	463.0	16	7408.0
Download	12	Type 3	8.2	441.0	17	7497.0	Download	12	Type 4	16.0	441.0	14	6174.0
Download	13	Type 3	7.2	323.0	16	5168.0	Download	13	Type 4	13.8	323.0	13	4199.0
Download	14	Type 3	9.5	297.0	18	5346.0	Download	14	Type 4	18.9	297.0	16	4752.0
Download	15	Type 3	8.0	412.0	17	7004.0	Download	15	Type 4	15.5	412.0	14	5768.0
Download	16	Type 3	10.0	324.0	18	5832.0	Download	16	Type 4	19.9	324.0	16	5184.0
Download	17	Type 3	7.4	271.0	17	4607.0	Download	17	Type 4	14.1	271.0	13	3523.0
Download	18	Type 3	7.9	349.0	17	5933.0	Download	18	Type 4	15.2	349.0	14	4886.0
Download	19	Type 3	7.3	409.0	16	6544.0	Download	19	Type 4	13.8	409.0	13	5317.0
Download	20	Type 3	8.7	373.0	18	6714.0	Download	20	Type 4	17.1	373.0	15	5595.0
Download	21	Type 3	7.2	254.0	16	4064.0	Download	21	Type 4	13.8	254.0	13	3302.0
Download	22	Type 3	9.9	274.0	18	4932.0	Download	22	Type 4	19.8	274.0	16	4384.0
Download	23	Type 3	7.9	278.0	17	4726.0	Download	23	Type 4	15.3	278.0	14	3892.0
Download	24	Type 3	7.5	317.0	17	5389.0	Download	24	Type 4	14.5	317.0	13	4121.0
Download	25	Type 3	6.1	260.0	16	4160.0	Download	25	Type 4	11.3	260.0	12	3120.0
Download	26	Type 3	8.8	211.0	18	3798.0	Download	26	Type 4	17.3	211.0	15	3165.0
Download	27	Type 3	9.7	272.0	18	4896.0	Download	27	Type 4	19.2	272.0	16	4352.0
Download	28	Type 3	7.4	264.0	17	4488.0	Download	28	Type 4	14.2	264.0	13	3432.0
Download	29	Type 3	9.2	284.0	18	5112.0	Download	29	Type 4	18.2	284.0	15	4260.0



Radar Type 5 - Radar Statistical Performance					
Trail #	Test Freq. (MHz)	1=Detection 0=No Detection	Trail #	Test Freq. (MHz)	1=Detection 0=No Detection
0	5500	1	15	5494.8	1
1	5500	1	16	5498	1
2	5500	1	17	5494	1
3	5500	1	18	5494.8	1
4	5500	1	19	5494	1
5	5500	1	20	5504	1
6	5500	1	21	5506.4	1
7	5500	1	22	5502	1
8	5500	1	23	5505.2	1
9	5500	1	24	5505.6	1
10	5496.4	1	25	5508	1
11	5497.6	1	26	5503.6	1
12	5495.2	1	27	5502.4	1
13	5494	1	28	5506	1
14	5497.2	1	29	5503.2	1
Detection Percentage (%)			100.0%		

Type 5 Radar Waveform_0								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	636185.0	77.8	13	2	1665.0	1477.0	—	
1	32674.0	51.9	13	1	1074.0	—	—	
2	226294.0	63.8	13	1	1584.0	—	—	
3	417976.0	96.6	13	3	1682.0	1786.0	1843.0	
4	611152.0	85.9	13	3	1795.0	1215.0	1729.0	
5	8789.0	73.7	13	2	1198.0	1549.0	—	
6	201917.0	77.2	13	2	1837.0	1819.0	—	
7	395530.0	68.4	13	2	1587.0	1114.0	—	
8	588564.0	76.7	13	2	2000.0	1155.0	—	
9	783794.0	53.2	13	1	1147.0	—	—	
10	177933.0	85.7	13	3	1433.0	1695.0	1394.0	
11	370624.0	94.3	13	3	1670.0	1426.0	1935.0	
12	564893.0	77.6	13	2	1294.0	1671.0	—	
13	759583.0	65.7	13	1	1512.0	—	—	
14	154262.0	93.5	13	3	1444.0	1130.0	1468.0	
Type 5 Radar Waveform_1								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	653020.0	75.0	5	2	1880.0	1527.0	—	
1	1015643.0	99.4	5	3	1401.0	1262.0	1257.0	
2	1379398.0	67.4	5	2	1531.0	1403.0	—	
3	245489.0	73.6	5	2	1449.0	1041.0	—	
4	609113.0	65.9	5	1	1432.0	—	—	
5	970852.0	83.8	5	3	1356.0	1292.0	1419.0	
6	1335913.0	65.5	5	1	1543.0	—	—	
7	200406.0	98.6	5	3	1548.0	1796.0	1728.0	
Type 5 Radar Waveform_2								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	409565.0	73.8	9	2	1806.0	1538.0	—	
1	673692.0	69.5	9	2	1117.0	1649.0	—	
2	938562.0	51.9	9	1	1651.0	—	—	
3	113209.0	84.6	9	3	1976.0	1032.0	1271.0	
4	376726.0	95.4	9	3	1060.0	1903.0	1388.0	
5	641212.0	68.0	9	2	1368.0	1351.0	—	
6	903714.0	89.6	9	3	1338.0	1514.0	1573.0	
7	80863.0	81.9	9	2	1022.0	1689.0	—	
8	344067.0	88.3	9	3	1810.0	1330.0	1838.0	
9	609331.0	53.7	9	1	1597.0	—	—	
10	871542.0	91.3	9	3	1961.0	1106.0	1001.0	

Type 5 Radar Waveform_3								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	26541.0	68.1	19	2	1339.0	1355.0	—	
1	171821.0	58.7	19	1	1251.0	—	—	
2	316229.0	75.3	19	2	1136.0	1640.0	—	
3	461864.0	56.4	19	1	1753.0	—	—	
4	8677.0	99.7	19	3	1196.0	1708.0	1159.0	
5	153995.0	57.7	19	1	1013.0	—	—	
6	299238.0	59.5	19	1	1072.0	—	—	
7	443177.0	80.0	19	2	1482.0	1369.0	—	
8	587671.0	82.0	19	2	1993.0	1197.0	—	
9	135674.0	82.8	19	2	1883.0	1005.0	—	
10	279928.0	88.0	19	3	1061.0	1928.0	1101.0	
11	424279.0	93.2	19	3	1207.0	1907.0	1223.0	
12	570132.0	70.4	19	2	1526.0	1360.0	—	
13	117439.0	95.3	19	3	1171.0	1955.0	1775.0	
14	262502.0	81.9	19	2	1690.0	1545.0	—	
15	406573.0	98.5	19	3	1975.0	1169.0	1062.0	
16	553328.0	65.0	19	1	1767.0	—	—	
17	99799.0	85.4	19	3	1011.0	1637.0	1425.0	
18	244095.0	91.6	19	3	1878.0	1445.0	1325.0	
19	390012.0	67.3	19	2	1091.0	1218.0	—	
Type 5 Radar Waveform_4								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	629614.0	67.9	16	2	1320.0	1133.0	—	
1	96856.0	62.3	16	1	1957.0	—	—	
2	267719.0	53.3	16	1	1592.0	—	—	
3	436784.0	90.0	16	3	1900.0	1153.0	1346.0	
4	608289.0	77.1	16	2	1166.0	1646.0	—	
5	75610.0	83.9	16	3	1278.0	1232.0	1459.0	
6	245638.0	89.1	16	3	1240.0	1384.0	1939.0	
7	416355.0	81.8	16	2	1833.0	1676.0	—	
8	588736.0	50.3	16	1	1075.0	—	—	
9	54571.0	87.1	16	3	1116.0	1996.0	1756.0	
10	225175.0	71.3	16	2	1225.0	1815.0	—	
11	394825.0	97.5	16	3	1884.0	1465.0	1132.0	
12	565361.0	90.6	16	3	1561.0	1040.0	1354.0	
13	33643.0	86.3	16	3	1596.0	1183.0	1792.0	
14	203957.0	97.6	16	3	1365.0	1073.0	1361.0	
15	373812.0	84.7	16	3	1021.0	1718.0	1854.0	
16	544060.0	99.7	16	3	1150.0	1244.0	1988.0	

Type 5 Radar Waveform_5								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	15438.0	92.9	12	3	1085.0	1564.0	1407.0	
1	222486.0	67.7	12	2	1744.0	1747.0	—	
2	430731.0	65.8	12	1	1092.0	—	—	
3	637784.0	56.3	12	1	1851.0	—	—	
4	845342.0	53.7	12	1	1727.0	—	—	
5	196720.0	83.5	12	3	1679.0	1930.0	1025.0	
6	404955.0	65.8	12	1	1519.0	—	—	
7	610711.0	85.9	12	3	1134.0	1034.0	1808.0	
8	818057.0	76.3	12	2	1606.0	1926.0	—	
9	171459.0	81.5	12	2	1891.0	1714.0	—	
10	377969.0	89.4	12	3	1310.0	1594.0	1827.0	
11	586875.0	63.4	12	1	1568.0	—	—	
12	792834.0	69.6	12	2	1307.0	1925.0	—	
13	146044.0	74.5	12	2	1264.0	1846.0	—	
Type 5 Radar Waveform_6								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	329022.0	96.6	13	3	1182.0	1609.0	1581.0	
1	521718.0	96.7	13	3	1829.0	1799.0	1154.0	
2	714222.0	86.5	13	3	1923.0	1396.0	1865.0	
3	112450.0	73.3	13	2	1908.0	1318.0	—	
4	306283.0	55.8	13	1	1688.0	—	—	
5	500239.0	55.4	13	1	1145.0	—	—	
6	690932.0	85.3	13	3	1336.0	1504.0	1820.0	
7	88645.0	79.4	13	2	1344.0	1893.0	—	
8	282508.0	65.7	13	1	1476.0	—	—	
9	475842.0	68.6	13	2	1008.0	1028.0	—	
10	667887.0	77.7	13	2	1972.0	1835.0	—	
11	64845.0	79.6	13	2	1882.0	1331.0	—	
12	257755.0	94.9	13	3	1830.0	1070.0	1349.0	
13	452335.0	61.4	13	1	1451.0	—	—	
14	643395.0	90.6	13	3	1233.0	1562.0	1887.0	
Type 5 Radar Waveform_7								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	51446.0	52.6	10	1	1210.0	—	—	
1	292696.0	84.1	10	3	1314.0	1725.0	1529.0	
2	533989.0	97.7	10	3	1139.0	1868.0	1805.0	
3	775564.0	97.3	10	3	1341.0	1446.0	1755.0	
4	21542.0	98.8	10	3	1544.0	1386.0	1302.0	
5	263385.0	72.2	10	2	1771.0	1184.0	—	
6	505581.0	67.6	10	2	1175.0	1027.0	—	
7	747058.0	75.7	10	2	1026.0	1871.0	—	
8	989976.0	60.9	10	1	1798.0	—	—	
9	234024.0	64.2	10	1	1138.0	—	—	
10	475207.0	78.8	10	2	1784.0	1604.0	—	
11	715825.0	87.5	10	3	1511.0	1712.0	1683.0	

Type 5 Radar Waveform_8								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	823112.0	54.1	13	1	1415.0	—	—	
1	174965.0	50.7	13	1	1221.0	—	—	
2	382216.0	52.3	13	1	1974.0	—	—	
3	587395.0	99.8	13	3	1558.0	1696.0	1949.0	
4	796897.0	68.4	13	2	1014.0	1099.0	—	
5	149042.0	80.8	13	2	1736.0	1505.0	—	
6	356750.0	62.5	13	1	1778.0	—	—	
7	563824.0	74.8	13	2	1149.0	1204.0	—	
8	772314.0	50.8	13	1	1049.0	—	—	
9	123796.0	54.0	13	1	1417.0	—	—	
10	331215.0	63.0	13	1	1730.0	—	—	
11	537402.0	91.8	13	3	1143.0	1270.0	1347.0	
12	744805.0	79.3	13	2	1274.0	1992.0	—	
13	98172.0	64.3	13	1	1937.0	—	—	
Type 5 Radar Waveform_9								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	535615.0	63.4	6	1	1043.0	—	—	
1	898668.0	52.0	6	1	1863.0	—	—	
2	1259235.0	97.2	6	3	1973.0	1605.0	1583.0	
3	127106.0	78.7	6	2	1466.0	1743.0	—	
4	490358.0	74.2	6	2	1280.0	1219.0	—	
5	852409.0	88.7	6	3	1293.0	1934.0	1273.0	
6	1217152.0	54.3	6	1	1991.0	—	—	
7	82296.0	95.4	6	3	1580.0	1555.0	1791.0	
Type 5 Radar Waveform_10								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	209249.0	73.7	16	2	1208.0	1497.0	—	
1	378386.0	97.4	16	3	1942.0	1754.0	1613.0	
2	548411.0	91.7	16	3	1999.0	1702.0	1462.0	
3	17733.0	66.2	16	1	1393.0	—	—	
4	187952.0	70.8	16	2	1968.0	1821.0	—	
5	359277.0	52.3	16	1	1740.0	—	—	
6	528886.0	78.9	16	2	1308.0	1984.0	—	
7	700166.0	70.9	16	2	1050.0	1358.0	—	
8	167197.0	75.6	16	2	1437.0	1430.0	—	
9	338262.0	59.1	16	1	1697.0	—	—	
10	508324.0	77.0	16	2	1397.0	1304.0	—	
11	678689.0	67.9	16	2	1803.0	1083.0	—	
12	146031.0	81.2	16	2	1720.0	1932.0	—	
13	318923.0	78.7	16	2	1247.0	1121.0	—	
14	488056.0	63.3	16	1	1634.0	—	—	
15	657326.0	68.9	16	2	1849.0	1423.0	—	
16	125509.0	59.3	16	1	1093.0	—	—	

Type 5 Radar Waveform_11								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	263736.0	98.9	19	3	1381.0	1680.0	1488.0	
1	416459.0	82.3	19	2	1716.0	1855.0	—	
2	567902.0	86.7	19	3	1211.0	1400.0	1919.0	
3	92979.0	89.7	19	3	1861.0	1068.0	1282.0	
4	245155.0	98.6	19	3	1507.0	1194.0	1461.0	
5	397609.0	71.1	19	2	1921.0	1789.0	—	
6	551431.0	55.9	19	1	1947.0	—	—	
7	74413.0	67.9	19	2	1350.0	1372.0	—	
8	226559.0	84.4	19	3	1203.0	1107.0	1443.0	
9	380056.0	58.8	19	1	1715.0	—	—	
10	533408.0	65.6	19	1	1017.0	—	—	
11	55547.0	78.5	19	2	1911.0	1704.0	—	
12	207876.0	82.3	19	2	1845.0	1686.0	—	
13	359771.0	90.1	19	3	1938.0	1071.0	1266.0	
14	511297.0	90.2	19	3	1989.0	1089.0	1950.0	
15	36803.0	83.1	19	2	1943.0	1406.0	—	
16	189652.0	58.8	19	1	1742.0	—	—	
17	341809.0	77.0	19	2	1187.0	1657.0	—	
18	495737.0	55.0	19	1	1012.0	—	—	
Type 5 Radar Waveform_12								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	22911.0	58.1	13	1	1929.0	—	—	
1	216473.0	52.1	13	1	1910.0	—	—	
2	410004.0	59.9	13	1	1971.0	—	—	
3	603671.0	60.2	13	1	1812.0	—	—	
4	794160.0	95.9	13	3	1399.0	1906.0	1608.0	
5	192251.0	79.9	13	2	1626.0	1859.0	—	
6	385590.0	78.5	13	2	1238.0	1917.0	—	
7	579862.0	53.8	13	1	1763.0	—	—	
8	773423.0	64.7	13	1	1800.0	—	—	
9	168898.0	61.4	13	1	1390.0	—	—	
10	361606.0	83.2	13	2	1692.0	1858.0	—	
11	553866.0	84.7	13	3	1533.0	1677.0	1638.0	
12	747241.0	88.7	13	3	1703.0	1528.0	1058.0	
13	144710.0	78.3	13	2	1258.0	1951.0	—	
14	337856.0	69.3	13	2	1731.0	1717.0	—	
Type 5 Radar Waveform_13								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	664275.0	75.3	10	2	1994.0	1612.0	—	
1	907886.0	56.3	10	1	1456.0	—	—	
2	151316.0	67.7	10	2	1617.0	1185.0	—	
3	393746.0	55.6	10	1	1337.0	—	—	
4	635093.0	75.2	10	2	1421.0	1267.0	—	
5	876993.0	76.3	10	2	1359.0	1305.0	—	
6	121278.0	85.7	10	3	1547.0	1362.0	1924.0	
7	362696.0	98.4	10	3	1873.0	1550.0	1249.0	
8	604342.0	86.4	10	3	1779.0	1439.0	1046.0	
9	846453.0	93.6	10	3	1059.0	1031.0	1452.0	
10	91871.0	63.3	10	1	1328.0	—	—	
11	333050.0	92.4	10	3	1412.0	1673.0	1322.0	

Type 5 Radar Waveform_14								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	361323.0	93.3	18	3	1983.0	1912.0	1535.0
	1	515261.0	69.1	18	2	1102.0	1794.0	-
	2	39025.0	86.9	18	3	1044.0	1152.0	1148.0
	3	190900.0	84.9	18	3	1894.0	1948.0	1118.0
	4	343941.0	72.3	18	2	1094.0	1916.0	-
	5	497624.0	51.7	18	1	1447.0	-	-
	6	20319.0	58.3	18	1	1429.0	-	-
	7	172999.0	60.8	18	1	1979.0	-	-
	8	325872.0	57.1	18	1	1641.0	-	-
	9	475841.0	88.9	18	3	1886.0	1964.0	1489.0
	10	1489.0	72.0	18	2	1909.0	1297.0	-
	11	153647.0	90.9	18	3	1261.0	1566.0	1370.0
	12	307096.0	59.8	18	1	1552.0	-	-
	13	458804.0	70.0	18	2	1759.0	1291.0	-
	14	610798.0	67.2	18	2	1625.0	1881.0	-
	15	134759.0	91.2	18	3	1382.0	1832.0	1661.0
	16	288306.0	56.5	18	1	1483.0	-	-
	17	441296.0	51.2	18	1	1237.0	-	-
	18	592780.0	74.1	18	2	1471.0	1245.0	-
Type 5 Radar Waveform_15								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	158286.0	76.9	12	2	1110.0	1140.0	-
	1	366024.0	50.2	12	1	1316.0	-	-
	2	573452.0	62.9	12	1	1520.0	-	-
	3	780619.0	64.7	12	1	1902.0	-	-
	4	132455.0	83.8	12	3	1410.0	1097.0	1621.0
	5	340207.0	65.4	12	1	1944.0	-	-
	6	548208.0	53.2	12	1	1024.0	-	-
	7	755333.0	51.7	12	1	1603.0	-	-
	8	107117.0	78.7	12	2	1804.0	1168.0	-
	9	314500.0	72.4	12	2	1030.0	1343.0	-
	10	522447.0	53.8	12	1	1327.0	-	-
	11	728517.0	73.6	12	2	1524.0	1553.0	-
	12	81611.0	66.7	12	2	1722.0	1122.0	-
	13	288948.0	82.5	12	2	1404.0	1019.0	-

Type 5 Radar Waveform_16								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	345766.0	87.6	20	3	1565.0	1055.0	1840.0	
1	490019.0	85.2	20	3	1735.0	1541.0	1408.0	
2	39073.0	84.8	20	3	1534.0	1889.0	1463.0	
3	183923.0	77.9	20	2	1749.0	1460.0	-	
4	328777.0	76.5	20	2	1518.0	1485.0	-	
5	474728.0	60.9	20	1	1540.0	-	-	
6	21394.0	83.0	20	2	1080.0	1010.0	-	
7	165992.0	80.4	20	2	1824.0	1752.0	-	
8	310973.0	67.5	20	2	1764.0	1181.0	-	
9	456884.0	62.1	20	1	1495.0	-	-	
10	3515.0	86.4	20	3	1773.0	1966.0	1263.0	
11	147928.0	84.3	20	3	1593.0	1188.0	1788.0	
12	293225.0	76.9	20	2	1226.0	1537.0	-	
13	436922.0	95.8	20	3	1192.0	1298.0	1844.0	
14	584015.0	55.2	20	1	1644.0	-	-	
15	130832.0	59.0	20	1	1402.0	-	-	
16	274684.0	94.5	20	3	1296.0	1700.0	1283.0	
17	418579.0	91.9	20	3	1970.0	1978.0	1165.0	
18	563464.0	85.2	20	3	1732.0	1551.0	1189.0	
19	112787.0	69.5	20	2	1038.0	1224.0	-	
Type 5 Radar Waveform_17								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	429224.0	86.4	10	3	1259.0	1918.0	1455.0	
1	670241.0	92.2	10	3	1598.0	1719.0	1895.0	
2	912880.0	80.4	10	2	1816.0	1899.0	-	
3	158603.0	54.3	10	1	1335.0	-	-	
4	400824.0	53.1	10	1	1303.0	-	-	
5	641915.0	69.4	10	2	1503.0	1546.0	-	
6	883823.0	69.1	10	2	1279.0	1639.0	-	
7	128373.0	100.0	10	3	1375.0	1438.0	1595.0	
8	370379.0	79.6	10	2	1239.0	1705.0	-	
9	611194.0	88.4	10	3	1374.0	1579.0	1623.0	
10	855665.0	53.3	10	1	1016.0	-	-	
11	98897.0	65.3	10	1	1709.0	-	-	
Type 5 Radar Waveform_18								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	292143.0	55.3	12	1	1920.0	-	-	
1	499633.0	58.3	12	1	1797.0	-	-	
2	706377.0	72.3	12	2	1610.0	1039.0	-	
3	58989.0	84.8	12	3	1131.0	1761.0	1721.0	
4	266161.0	82.5	12	2	1875.0	1431.0	-	
5	474469.0	63.3	12	1	1095.0	-	-	
6	680544.0	80.0	12	2	1119.0	1913.0	-	
7	33519.0	90.3	12	3	1660.0	1853.0	1123.0	
8	240319.0	91.1	12	3	1539.0	1783.0	1172.0	
9	447400.0	96.6	12	3	1525.0	1036.0	1385.0	
10	654516.0	82.7	12	2	1710.0	1990.0	-	
11	8083.0	50.7	12	1	1234.0	-	-	
12	215435.0	78.4	12	2	1047.0	1109.0	-	
13	421325.0	99.5	12	3	1299.0	1965.0	1869.0	

Type 5 Radar Waveform_19								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	733725.0	88.6	10	3	1501.0	1067.0	1927.0	
1	977882.0	57.4	10	1	1723.0	—	—	
2	221197.0	96.6	10	3	1086.0	1658.0	1324.0	
3	462915.0	69.7	10	2	1751.0	1945.0	—	
4	705071.0	77.9	10	2	1642.0	1317.0	—	
5	947923.0	62.0	10	1	1866.0	—	—	
6	191373.0	88.4	10	3	1997.0	1077.0	1366.0	
7	432561.0	97.3	10	3	1790.0	1896.0	1367.0	
8	674004.0	96.2	10	3	1391.0	1787.0	1672.0	
9	915842.0	95.4	10	3	1020.0	1892.0	1414.0	
10	162176.0	54.8	10	1	1084.0	—	—	
11	403553.0	80.4	10	2	1850.0	1436.0	—	
Type 5 Radar Waveform_20								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	483470.0	74.7	15	2	1619.0	1611.0	—	
1	666072.0	57.1	15	1	1560.0	—	—	
2	98810.0	91.9	15	3	1392.0	1475.0	1276.0	
3	279914.0	83.1	15	2	1809.0	1772.0	—	
4	462536.0	50.7	15	1	1003.0	—	—	
5	642324.0	79.2	15	2	1574.0	1600.0	—	
6	76831.0	58.7	15	1	1186.0	—	—	
7	257785.0	71.0	15	2	1521.0	1567.0	—	
8	438554.0	79.0	15	2	1777.0	1960.0	—	
9	620397.0	68.5	15	2	1284.0	1428.0	—	
10	54310.0	73.5	15	2	1904.0	1352.0	—	
11	235506.0	70.5	15	2	1864.0	1115.0	—	
12	417036.0	76.6	15	2	1045.0	1300.0	—	
13	597974.0	81.2	15	2	1160.0	1675.0	—	
14	32086.0	61.8	15	1	1277.0	—	—	
15	212751.0	94.9	15	3	1450.0	1206.0	1860.0	
Type 5 Radar Waveform_21								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	526149.0	78.5	9	2	1653.0	1698.0	—	
1	767135.0	89.8	9	3	1174.0	1962.0	1167.0	
2	12955.0	59.4	9	1	1982.0	—	—	
3	254612.0	79.6	9	2	1633.0	1890.0	—	
4	496588.0	76.0	9	2	1112.0	1811.0	—	
5	739728.0	53.6	9	1	1144.0	—	—	
6	980872.0	80.9	9	2	1220.0	1053.0	—	
7	225249.0	61.6	9	1	1724.0	—	—	
8	467279.0	53.4	9	1	1901.0	—	—	
9	709720.0	59.9	9	1	1379.0	—	—	
10	951847.0	60.4	9	1	1453.0	—	—	
11	194839.0	91.4	9	3	1768.0	1726.0	1227.0	

Type 5 Radar Waveform_22								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	261858.0	77.0	20	2	1191.0	1363.0	—	
1	407646.0	58.1	20	1	1248.0	—	—	
2	552319.0	62.1	20	1	1836.0	—	—	
3	99107.0	76.9	20	2	1334.0	1236.0	—	
4	243514.0	80.0	20	2	1914.0	1852.0	—	
5	389464.0	52.0	20	1	1701.0	—	—	
6	531093.0	88.6	20	3	1693.0	1995.0	1905.0	
7	81159.0	72.9	20	2	1922.0	1387.0	—	
8	225245.0	98.5	20	3	1839.0	1746.0	1389.0	
9	371906.0	57.9	20	1	1193.0	—	—	
10	514197.0	95.9	20	3	1659.0	1870.0	1066.0	
11	63561.0	53.5	20	1	1162.0	—	—	
12	207510.0	92.0	20	3	1745.0	1654.0	1458.0	
13	353638.0	57.3	20	1	1834.0	—	—	
14	497515.0	70.5	20	2	1684.0	1586.0	—	
15	45553.0	70.0	20	2	1042.0	1664.0	—	
16	189821.0	84.0	20	3	1765.0	1630.0	1176.0	
17	335330.0	76.1	20	2	1557.0	1057.0	—	
18	478825.0	93.2	20	3	1985.0	1018.0	1340.0	
19	27594.0	96.8	20	3	1760.0	1614.0	1817.0	
Type 5 Radar Waveform_23								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	247117.0	50.1	12	1	1841.0	—	—	
1	453362.0	93.5	12	3	1590.0	1081.0	1413.0	
2	660875.0	68.8	12	2	1707.0	1577.0	—	
3	14140.0	56.3	12	1	1056.0	—	—	
4	220734.0	86.0	12	3	1953.0	1108.0	1987.0	
5	428367.0	75.2	12	2	1572.0	1536.0	—	
6	636681.0	54.4	12	1	1517.0	—	—	
7	843157.0	71.1	12	2	1329.0	1243.0	—	
8	195585.0	76.2	12	2	1940.0	1770.0	—	
9	403231.0	80.2	12	2	1098.0	1209.0	—	
10	610202.0	79.7	12	2	1588.0	1214.0	—	
11	815229.0	90.9	12	3	1615.0	1862.0	1601.0	
12	170267.0	68.7	12	2	1377.0	1441.0	—	
13	377306.0	67.4	12	2	1872.0	1313.0	—	
Type 5 Radar Waveform_24								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	628071.0	94.0	11	3	1643.0	1748.0	1941.0	
1	853391.0	70.8	11	2	1177.0	1201.0	—	
2	156223.0	56.3	11	1	1006.0	—	—	
3	378734.0	96.7	11	3	1230.0	1163.0	1332.0	
4	601331.0	90.6	11	3	1217.0	1582.0	1498.0	
5	825462.0	74.5	11	2	1569.0	1281.0	—	
6	128265.0	92.6	11	3	1065.0	1669.0	1222.0	
7	351161.0	89.0	11	3	1493.0	1135.0	1380.0	
8	573425.0	96.5	11	3	1607.0	1822.0	1602.0	
9	798431.0	70.5	11	2	1141.0	1178.0	—	
10	100737.0	94.0	11	3	1009.0	1629.0	1956.0	
11	324661.0	55.8	11	1	1290.0	—	—	
12	546278.0	87.7	11	3	1435.0	1963.0	1164.0	

Type 5 Radar Waveform_25								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	1253842.0	68.6	5	2	1306.0	1161.0	-
	1	119486.0	83.1	5	2	1420.0	1315.0	-
	2	482958.0	60.9	5	1	1687.0	-	-
	3	845641.0	77.7	5	2	1776.0	1158.0	-
	4	1208428.0	77.4	5	2	1793.0	1510.0	-
	5	74748.0	66.8	5	2	1576.0	1323.0	-
	6	438300.0	63.7	5	1	1333.0	-	-
	7	800152.0	91.2	5	3	1409.0	1681.0	1275.0
Type 5 Radar Waveform_26								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	545865.0	83.6	16	3	1632.0	1195.0	1000.0
	1	14067.0	89.4	16	3	1173.0	1627.0	1656.0
	2	184953.0	55.8	16	1	1532.0	-	-
	3	353759.0	90.9	16	3	1981.0	1554.0	1998.0
	4	526388.0	54.7	16	1	1825.0	-	-
	5	694806.0	97.7	16	3	1734.0	1202.0	1250.0
	6	163568.0	67.5	16	2	1571.0	1434.0	-
	7	333410.0	96.7	16	3	1589.0	1469.0	1268.0
	8	504006.0	68.3	16	2	1750.0	1954.0	-
	9	675297.0	78.3	16	2	1591.0	1082.0	-
	10	142890.0	55.0	16	1	1427.0	-	-
	11	312479.0	84.9	16	3	1129.0	1936.0	1199.0
	12	482953.0	74.6	16	2	1959.0	1856.0	-
	13	655022.0	63.3	16	1	1885.0	-	-
	14	121457.0	99.8	16	3	1035.0	1515.0	1120.0
	15	292606.0	63.6	16	1	1647.0	-	-
	16	461322.0	87.3	16	3	1931.0	1051.0	1831.0
Type 5 Radar Waveform_27								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	565136.0	85.6	19	3	1946.0	1078.0	1015.0
	1	89970.0	68.6	19	2	1029.0	1780.0	-
	2	243121.0	54.2	19	1	1111.0	-	-
	3	396034.0	61.2	19	1	1104.0	-	-
	4	546225.0	97.1	19	3	1157.0	1969.0	1100.0
	5	70998.0	98.3	19	3	1142.0	1699.0	1622.0
	6	224093.0	62.4	19	1	1655.0	-	-
	7	376127.0	80.2	19	2	1126.0	1769.0	-
	8	527806.0	87.5	19	3	1216.0	1448.0	1179.0
	9	52247.0	85.8	19	3	1847.0	1348.0	1472.0
	10	204582.0	88.1	19	3	1023.0	1124.0	1631.0
	11	357941.0	65.3	19	1	1848.0	-	-
	12	510977.0	52.5	19	1	1470.0	-	-
	13	33698.0	52.3	19	1	1312.0	-	-
	14	186023.0	74.1	19	2	1915.0	1200.0	-
	15	339327.0	54.9	19	1	1479.0	-	-
	16	491053.0	76.2	19	2	1376.0	1502.0	-
	17	14858.0	60.4	19	1	1758.0	-	-
	18	167387.0	81.5	19	2	1491.0	1103.0	-

Type 5 Radar Waveform_28								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	507709.0	50.5	10	1	1857.0	—	—	
1	750249.0	55.7	10	1	1246.0	—	—	
2	989003.0	85.8	10	3	1774.0	1002.0	1967.0	
3	235634.0	76.9	10	2	1125.0	1474.0	—	
4	477675.0	75.1	10	2	1254.0	1052.0	—	
5	718312.0	92.3	10	3	1180.0	1486.0	1492.0	
6	960895.0	78.1	10	2	1301.0	1757.0	—	
7	205370.0	92.2	10	3	1898.0	1252.0	1713.0	
8	446940.0	89.0	10	3	1260.0	1706.0	1411.0	
9	689225.0	70.9	10	2	1578.0	1620.0	—	
10	932305.0	63.1	10	1	1782.0	—	—	
11	176231.0	55.3	10	1	1522.0	—	—	
Type 5 Radar Waveform_29								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	277485.0	83.4	17	3	1454.0	1205.0	1801.0	
1	437880.0	97.3	17	3	1319.0	1826.0	1635.0	
2	598445.0	90.4	17	3	1079.0	1986.0	1674.0	
3	97088.0	91.8	17	3	1563.0	1151.0	1802.0	
4	257251.0	98.2	17	3	1876.0	1977.0	1766.0	
5	419893.0	59.5	17	1	1952.0	—	—	
6	580724.0	80.0	17	2	1253.0	1137.0	—	
7	77366.0	86.5	17	3	1054.0	1128.0	1828.0	
8	238032.0	91.1	17	3	1105.0	1599.0	1442.0	
9	398605.0	93.5	17	3	1867.0	1373.0	1087.0	
10	562025.0	60.7	17	1	1033.0	—	—	
11	57684.0	67.2	17	2	1288.0	1405.0	—	
12	219083.0	61.8	17	1	1585.0	—	—	
13	379234.0	79.4	17	2	1933.0	1667.0	—	
14	540896.0	81.4	17	2	1096.0	1464.0	—	
15	37916.0	65.7	17	1	1496.0	—	—	
16	198794.0	76.0	17	2	1733.0	1255.0	—	
17	359754.0	81.0	17	2	1326.0	1668.0	—	



Radar Type 6 - Radar Statistical Performance			
Trail #	1=Detection 0=No Detection	Trail #	1=Detection 0=No Detection
0	1	15	1
1	1	16	1
2	1	17	1
3	1	18	1
4	1	19	1
5	0	20	1
6	1	21	1
7	1	22	1
8	1	23	1
9	0	24	1
10	1	25	1
11	1	26	1
12	1	27	1
13	1	28	1
14	1	29	1
Detection Percentage (%)		93.3%	

Type 6 Radar Waveform_0

Frequency List (MHz)	0	1	2	3	4
0	5364	5717	5334	5705	5549
5	5312	5260	5635	5503	5570
10	5347	5508	5292	5447	5588
15	5621	5638	5296	5482	5455
20	5636	5593	5434	5306	5411
25	5556	5378	5478	5432	5341
30	5438	5294	5496	5285	5327
35	5293	5502	5277	5403	5330
40	5612	5720	5544	5615	5561
45	5676	5704	5366	5290	5387
50	5278	5723	5383	5368	5263
55	5630	5375	5718	5281	5604
60	5453	5509	5479	5400	5262
65	5354	5467	5545	5466	5611
70	5715	5402	5568	5641	5396
75	5567	5557	5674	5359	5392
80	5313	5537	5258	5475	5272
85	5388	5474	5555	5410	5355
90	5517	5382	5386	5664	5697
95	5721	5268	5489	5706	5525

Type 6 Radar Waveform_1

Frequency List (MHz)	0	1	2	3	4
0	5619	5578	5270	5294	5354
5	5660	5710	5666	5399	5656
10	5297	5333	5642	5609	5709
15	5668	5527	5647	5547	5284
20	5375	5395	5384	5444	5705
25	5584	5536	5480	5658	5453
30	5403	5576	5588	5641	5465
35	5674	5580	5623	5559	5627
40	5553	5704	5673	5633	5724
45	5373	5348	5331	5513	5637
50	5544	5314	5585	5697	5257
55	5672	5471	5423	5424	5638
60	5644	5345	5569	5655	5413
65	5271	5415	5550	5371	5335
70	5382	5416	5533	5706	5558
75	5535	5692	5256	5436	5716
80	5385	5669	5458	5349	5456
85	5336	5634	5703	5352	5280
90	5506	5313	5690	5326	5631
95	5628	5546	5289	5490	5590

Type 6 Radar Waveform_2						
Frequency List (MHz)	0	1	2	3	4	
0	5302	5342	5681	5455	5611	
5	5493	5682	5310	5257	5606	
10	5587	5561	5374	5362	5630	
15	5322	5320	5502	5475	5364	
20	5555	5353	5316	5387	5357	
25	5332	5654	5312	5262	5409	
30	5522	5547	5410	5618	5253	
35	5311	5683	5556	5470	5258	
40	5537	5398	5710	5491	5469	
45	5670	5465	5704	5456	5406	
50	5384	5400	5513	5720	5365	
55	5296	5276	5641	5445	5626	
60	5564	5620	5395	5334	5290	
65	5401	5578	5359	5569	5586	
70	5282	5649	5407	5368	5647	
75	5643	5509	5592	5675	5678	
80	5581	5275	5381	5512	5600	
85	5304	5382	5389	5458	5666	
90	5419	5642	5350	5526	5519	
95	5709	5692	5418	5653	5354	
Type 6 Radar Waveform_3						
Frequency List (MHz)	0	1	2	3	4	
0	5557	5581	5617	5616	5356	
5	5535	5704	5385	5420	5338	
10	5518	5350	5415	5651	5313	
15	5447	5605	5520	5653	5563	
20	5519	5257	5476	5330	5598	
25	5506	5515	5366	5443	5661	
30	5533	5367	5358	5502	5606	
35	5347	5647	5266	5411	5451	
40	5334	5332	5709	5667	5394	
45	5684	5539	5464	5437	5665	
50	5389	5421	5416	5574	5488	
55	5536	5580	5279	5439	5324	
60	5499	5710	5708	5404	5305	
65	5295	5525	5589	5359	5452	
70	5576	5272	5492	5388	5551	
75	5547	5323	5724	5256	5721	
80	5293	5379	5584	5361	5508	
85	5479	5693	5341	5655	5715	
90	5629	5494	5401	5637	5423	
95	5280	5316	5662	5281	5649	

Type 6 Radar Waveform_4						
Frequency List (MHz)	0	1	2	3	4	
0	5337	5345	5553	5302	5673	
5	5577	5629	5460	5583	5642	
10	5352	5614	5456	5655	5672	
15	5401	5574	5611	5565	5370	
20	5571	5588	5295	5468	5303	
25	5486	5358	5718	5470	5380	
30	5703	5422	5324	5573	5654	
35	5426	5263	5634	5661	5462	
40	5648	5498	5270	5474	5664	
45	5701	5622	5425	5490	5552	
50	5265	5597	5467	5300	5432	
55	5724	5437	5469	5258	5715	
60	5453	5277	5637	5705	5348	
65	5593	5262	5561	5251	5255	
70	5275	5341	5364	5510	5516	
75	5346	5712	5504	5549	5356	
80	5527	5376	5264	5447	5442	
85	5454	5658	5428	5544	5374	
90	5343	5663	5478	5689	5384	
95	5372	5707	5274	5292	5466	
Type 6 Radar Waveform_5						
Frequency List (MHz)	0	1	2	3	4	
0	5592	5584	5489	5463	5418	
5	5619	5651	5535	5271	5374	
10	5283	5500	5594	5375	5693	
15	5604	5714	5610	5562	5482	
20	5279	5711	5557	5276	5277	
25	5307	5446	5574	5414	5270	
30	5408	5281	5691	5428	5624	
35	5625	5354	5430	5339	5376	
40	5487	5581	5683	5617	5630	
45	5644	5705	5483	5342	5519	
50	5298	5518	5563	5598	5437	
55	5391	5659	5455	5686	5582	
60	5697	5469	5628	5294	5319	
65	5597	5631	5521	5436	5423	
70	5278	5665	5340	5485	5466	
75	5438	5315	5275	5614	5330	
80	5520	5590	5596	5264	5289	
85	5405	5646	5526	5346	5676	
90	5267	5539	5349	5600	5258	
95	5671	5533	5345	5587	5523	

Type 6 Radar Waveform_6						
Frequency List (MHz)	0	1	2	3	4	
0	5372	5348	5425	5624	5260	
5	5283	5576	5610	5434	5581	
10	5689	5289	5635	5570	5714	
15	5577	5256	5342	5558	5279	
20	5490	5652	5549	5724	5640	
25	5634	5552	5300	5448	5409	
30	5297	5713	5431	5580	5444	
35	5667	5445	5701	5492	5290	
40	5326	5286	5621	5382	5280	
45	5559	5313	5541	5499	5704	
50	5395	5474	5569	5274	5421	
55	5698	5625	5345	5374	5657	
60	5711	5519	5642	5301	5454	
65	5715	5520	5536	5366	5413	
70	5414	5378	5417	5316	5428	
75	5357	5586	5484	5296	5430	
80	5627	5684	5653	5273	5606	
85	5465	5363	5491	5352	5355	
90	5518	5631	5688	5588	5329	
95	5485	5502	5590	5390	5531	
Type 6 Radar Waveform_7						
Frequency List (MHz)	0	1	2	3	4	
0	5530	5587	5361	5310	5480	
5	5325	5598	5685	5500	5410	
10	5523	5553	5676	5290	5260	
15	5568	5383	5445	5603	5471	
20	5498	5514	5690	5638	5697	
25	5431	5583	5280	5404	5482	
30	5451	5661	5670	5646	5354	
35	5642	5331	5633	5594	5267	
40	5301	5640	5369	5559	5622	
45	5277	5391	5507	5396	5502	
50	5552	5494	5271	5650	5620	
55	5363	5719	5545	5338	5299	
60	5564	5628	5268	5684	5608	
65	5283	5343	5584	5572	5673	
70	5683	5517	5492	5381	5266	
75	5292	5387	5326	5706	5627	
80	5682	5262	5367	5276	5716	
85	5270	5511	5428	5458	5359	
90	5351	5600	5285	5394	5571	
95	5400	5265	5327	5643	5313	

Type 6 Radar Waveform_8					
Frequency List (MHz)	0	1	2	3	4
0	5310	5351	5297	5374	5322
5	5367	5523	5285	5663	5617
10	5454	5342	5717	5485	5281
15	5656	5510	5548	5648	5409
20	5680	5631	5630	5670	5319
25	5435	5483	5508	5516	5493
30	5647	5627	5386	5506	5462
35	5470	5724	5390	5420	5690
40	5576	5452	5497	5387	5274
45	5320	5487	5479	5560	5605
50	5381	5622	5671	5445	5489
55	5526	5253	5279	5502	5397
60	5629	5440	5678	5704	5544
65	5533	5608	5408	5478	5655
70	5481	5590	5268	5346	5673
75	5254	5295	5258	5459	5372
80	5623	5401	5267	5706	5545
85	5488	5650	5324	5305	5373
90	5559	5464	5660	5344	5698
95	5394	5378	5363	5321	5311

Type 6 Radar Waveform_9					
Frequency List (MHz)	0	1	2	3	4
0	5565	5590	5708	5535	5542
5	5409	5545	5360	5351	5349
10	5288	5606	5283	5583	5302
15	5269	5637	5554	5693	5380
20	5417	5274	5572	5719	5643
25	5682	5287	5686	5612	5550
30	5632	5536	5584	5504	5280
35	5660	5512	5340	5661	5573
40	5604	5415	5435	5530	5271
45	5627	5467	5562	5618	5658
50	5646	5401	5527	5722	5541
55	5268	5336	5714	5372	5473
60	5526	5539	5574	5369	5650
65	5367	5482	5547	5715	5370
70	5598	5252	5464	5484	5439
75	5622	5305	5642	5374	5341
80	5711	5385	5404	5264	5523
85	5448	5326	5451	5270	5667
90	5356	5621	5303	5724	5470
95	5639	5386	5361	5278	5378

Type 6 Radar Waveform_10						
Frequency List (MHz)	0	1	2	3	4	
0	5345	5354	5644	5696	5384	
5	5548	5470	5435	5514	5653	
10	5694	5492	5324	5303	5323	
15	5357	5667	5657	5641	5572	
20	5425	5440	5610	5711	5616	
25	5473	5414	5338	5584	5674	
30	5541	5719	5432	5480	5651	
35	5431	5457	5348	5615	5254	
40	5715	5373	5295	5365	5556	
45	5447	5645	5579	5533	5277	
50	5703	5298	5252	5566	5280	
55	5330	5636	5562	5403	5444	
60	5655	5704	5519	5676	5427	
65	5596	5568	5583	5450	5640	
70	5304	5421	5547	5288	5598	
75	5264	5494	5484	5695	5488	
80	5495	5660	5293	5527	5639	
85	5718	5351	5643	5511	5462	
90	5632	5310	5394	5501	5476	
95	5576	5327	5378	5333	5362	
Type 6 Radar Waveform_11						
Frequency List (MHz)	0	1	2	3	4	
0	5503	5593	5580	5382	5604	
5	5590	5492	5510	5385	5625	
10	5281	5365	5498	5344	5348	
15	5319	5285	5686	5386	5336	
20	5509	5551	5325	5589	5361	
25	5563	5520	5442	5618	5716	
30	5411	5459	5681	5300	5315	
35	5522	5350	5501	5529	5568	
40	5323	5689	5535	5362	5485	
45	5427	5253	5637	5667	5628	
50	5404	5349	5341	5389	5602	
55	5518	5277	5697	5415	5309	
60	5394	5464	5508	5639	5391	
65	5380	5282	5532	5582	5493	
70	5533	5587	5515	5574	5698	
75	5483	5614	5530	5676	5265	
80	5605	5441	5360	5636	5438	
85	5351	5474	5654	5500	5642	
90	5321	5579	5482	5610	5684	
95	5388	5443	5547	5581	5527	

Type 6 Radar Waveform_12

Frequency List (MHz)	0	1	2	3	4
0	5283	5357	5516	5543	5446
5	5632	5417	5585	5268	5592
10	5459	5545	5406	5693	5365
15	5436	5388	5256	5578	5344
20	5675	5492	5317	5562	5627
25	5512	5723	5546	5652	5380
30	5300	5455	5674	5358	5498
35	5454	5710	5621	5654	5443
40	5504	5678	5359	5407	5336
45	5695	5720	5685	5580	5400
50	5430	5687	5706	5544	5467
55	5419	5289	5438	5559	5506
60	5340	5554	5329	5558	5327
65	5385	5662	5519	5590	5364
70	5550	5657	5355	5259	5673
75	5420	5618	5697	5524	5275
80	5633	5254	5424	5534	5274
85	5465	5315	5415	5269	5488
90	5547	5566	5616	5509	5427
95	5445	5560	5636	5347	5432

Type 6 Radar Waveform_13

Frequency List (MHz)	0	1	2	3	4
0	5538	5596	5452	5704	5666
5	5674	5439	5660	5431	5324
10	5390	5334	5544	5413	5386
15	5524	5573	5491	5301	5295
20	5352	5269	5530	5406	5535
25	5515	5364	5451	5650	5686
30	5422	5664	5412	5317	5607
35	5318	5496	5326	5417	5429
40	5454	5343	5489	5565	5443
45	5356	5721	5387	5419	5656
50	5298	5475	5283	5281	5519
55	5393	5498	5657	5713	5260
60	5470	5724	5647	5477	5531
65	5278	5594	5597	5663	5259
70	5505	5690	5688	5526	5282
75	5719	5638	5672	5253	5478
80	5338	5630	5450	5632	5266
85	5497	5466	5333	5366	5339
90	5434	5591	5581	5351	5250
95	5411	5442	5264	5545	5527

Type 6 Radar Waveform_14

Frequency List (MHz)	0	1	2	3	4
0	5318	5360	5388	5390	5508
5	5338	5364	5260	5594	5628
10	5321	5598	5585	5511	5407
15	5612	5700	5497	5724	5487
20	5263	5435	5471	5398	5306
25	5691	5654	5279	5720	5464
30	5650	5369	5532	5284	5516
35	5635	5417	5310	5582	5368
40	5657	5669	5503	5683	5353
45	5553	5270	5502	5714	5351
50	5362	5634	5457	5608	5711
55	5337	5607	5452	5372	5706
60	5599	5414	5396	5576	5303
65	5574	5616	5702	5533	5534
70	5489	5466	5428	5588	5693
75	5537	5478	5293	5402	5387
80	5716	5449	5266	5259	5377
85	5401	5627	5645	5632	5583
90	5557	5561	5298	5320	5339
95	5597	5518	5708	5262	5543

Type 6 Radar Waveform_15

Frequency List (MHz)	0	1	2	3	4
0	5573	5599	5324	5551	5253
5	5380	5386	5335	5660	5360
10	5630	5484	5626	5706	5428
15	5603	5255	5600	5294	5679
20	5271	5504	5412	5487	5481
25	5669	5640	5382	5480	5279
30	5506	5539	5326	5272	5533
35	5336	5299	5508	5581	5260
40	5282	5496	5277	5441	5448
45	5447	5482	5250	5585	5297
50	5404	5627	5510	5633	5553
55	5319	5534	5659	5320	5406
60	5562	5351	5677	5579	5438
65	5408	5604	5520	5342	5651
70	5569	5366	5284	5647	5500
75	5574	5318	5289	5381	5437
80	5522	5530	5697	5701	5376
85	5515	5444	5561	5624	5365
90	5535	5278	5641	5371	5587
95	5357	5552	5493	5560	5608

Type 6 Radar Waveform_16					
Frequency List (MHz)	0	1	2	3	4
0	5256	5460	5260	5615	5570
5	5422	5311	5410	5348	5567
10	5561	5273	5667	5426	5449
15	5691	5382	5703	5339	5396
20	5279	5670	5353	5479	5454
25	5557	5492	5488	5584	5313
30	5645	5525	5283	5487	5685
35	5534	5341	5599	5377	5413
40	5671	5335	5360	5379	5591
45	5444	5411	5705	5668	5258
50	5457	5514	5289	5334	5604
55	5408	5357	5603	5263	5655
60	5548	5551	5269	5383	5715
65	5527	5466	5640	5600	5508
70	5576	5651	5450	5669	5560
75	5321	5613	5609	5642	5678
80	5478	5486	5296	5608	5624
85	5524	5438	5364	5580	5470
90	5606	5325	5555	5489	5375
95	5480	5674	5663	5282	5573
Type 6 Radar Waveform_17					
Frequency List (MHz)	0	1	2	3	4
0	5511	5699	5671	5301	5315
5	5464	5333	5485	5396	5492
10	5537	5708	5621	5470	5304
15	5509	5331	5287	5588	5665
20	5264	5391	5568	5427	5348
25	5441	5691	5688	5347	5687
30	5414	5715	5605	5459	5354
35	5480	5312	5648	5663	5682
40	5271	5540	5317	5356	5718
45	5685	5276	5316	5413	5640
50	5510	5655	5497	5558	5450
55	5599	5692	5370	5367	5522
60	5434	5328	5547	5353	5412
65	5366	5549	5544	5408	5446
70	5253	5266	5546	5421	5462
75	5355	5481	5719	5659	5633
80	5499	5552	5297	5521	5280
85	5438	5681	5543	5565	5474
90	5279	5608	5375	5619	5712
95	5523	5257	5541	5507	5261

Type 6 Radar Waveform_18					
Frequency List (MHz)	0	1	2	3	4
0	5291	5463	5607	5462	5632
5	5603	5258	5560	5674	5326
10	5274	5341	5491	5392	5636
15	5434	5332	5305	5673	5430
20	5400	5711	5293	5419	5317
25	5381	5254	5303	5672	5345
30	5611	5649	5619	5403	5541
35	5596	5585	5623	5633	5438
40	5647	5665	5359	5374	5466
45	5666	5516	5589	5706	5586
50	5394	5312	5646	5661	5493
55	5543	5599	5273	5476	5276
60	5455	5664	5498	5580	5618
65	5338	5531	5435	5629	5424
70	5311	5309	5314	5450	5310
75	5290	5640	5410	5609	5333
80	5461	5275	5518	5572	5620
85	5506	5282	5342	5330	5573
90	5718	5557	5517	5601	5708
95	5298	5525	5405	5304	5682
Type 6 Radar Waveform_19					
Frequency List (MHz)	0	1	2	3	4
0	5546	5702	5543	5623	5377
5	5645	5280	5635	5265	5335
10	5257	5590	5315	5439	5512
15	5383	5288	5440	5594	5681
20	5596	5273	5649	5373	5502
25	5620	5622	5518	5415	5393
30	5289	5629	5560	5385	5372
35	5283	5494	5337	5510	5424
40	5706	5571	5361	5435	5479
45	5442	5519	5456	5392	5290
50	5282	5297	5679	5716	5500
55	5600	5275	5464	5672	5308
60	5577	5401	5390	5447	5450
65	5608	5334	5507	5615	5524
70	5285	5322	5430	5433	5621
75	5662	5719	5589	5528	5515
80	5292	5462	5566	5307	5284
85	5296	5474	5724	5399	5710
90	5250	5353	5509	5303	5597
95	5407	5428	5562	5678	5300

Type 6 Radar Waveform_20					
Frequency List (MHz)	0	1	2	3	4
0	5704	5466	5479	5309	5597
5	5687	5680	5710	5428	5639
10	5566	5379	5356	5634	5533
15	5471	5318	5543	5422	5311
20	5592	5665	5641	5443	5390
25	5569	5350	5622	5449	5435
30	5653	5586	5300	5537	5667
35	5325	5585	5608	5269	5521
40	5263	5314	5509	5504	5529
45	5408	5528	5525	5393	5572
50	5343	5646	5333	5386	5502
55	5660	5688	5554	5465	5677
60	5338	5326	5454	5260	5615
65	5403	5347	5591	5396	5555
70	5515	5579	5601	5527	5387
75	5261	5707	5291	5550	5602
80	5439	5257	5370	5692	5498
85	5512	5487	5719	5401	5650
90	5335	5402	5255	5659	5722
95	5364	5493	5676	5510	5700

Type 6 Radar Waveform_21					
Frequency List (MHz)	0	1	2	3	4
0	5484	5705	5415	5470	5439
5	5351	5702	5310	5591	5371
10	5497	5265	5494	5354	5554
15	5559	5445	5646	5370	5503
20	5600	5356	5252	5255	5416
25	5656	5421	5456	5251	5483
30	5477	5542	5543	5418	5311
35	5390	5464	5676	5501	5422
40	5435	5674	5447	5269	5526
45	5337	5508	5608	5451	5625
50	5522	5642	5384	5475	5703
55	5507	5401	5655	5496	5309
60	5455	5619	5680	5326	5414
65	5345	5492	5295	5318	5273
70	5587	5530	5711	5615	5666
75	5638	5670	5622	5583	5691
80	5367	5626	5381	5561	5412
85	5682	5718	5589	5286	5289
90	5553	5314	5329	5261	5465
95	5541	5463	5574	5671	5458

Type 6 Radar Waveform_22

Frequency List (MHz)	0	1	2	3	4
0	5264	5469	5351	5631	5659
5	5393	5627	5385	5279	5578
10	5428	5529	5535	5549	5575
15	5647	5572	5274	5415	5695
20	5608	5425	5668	5722	5389
25	5544	5370	5355	5517	5616
30	5528	5500	5633	5463	5685
35	5603	5292	5297	5349	5513
40	5577	5509	5523	5644	5488
45	5691	5412	5678	5495	5398
50	5343	5435	5564	5526	5451
55	5589	5462	5315	5280	5584
60	5309	5625	5336	5615	5294
65	5530	5702	5565	5596	5345
70	5670	5630	5560	5591	5607
75	5693	5468	5477	5407	5545
80	5721	5409	5402	5525	5552
85	5381	5483	5340	5326	5609
90	5494	5364	5499	5423	5465
95	5518	5558	5569	5716	5718

Type 6 Radar Waveform_23

Frequency List (MHz)	0	1	2	3	4
0	5519	5708	5287	5695	5501
5	5435	5649	5460	5442	5407
10	5262	5318	5576	5269	5596
15	5638	5699	5377	5412	5591
20	5706	5336	5362	5432	5697
25	5387	5556	5454	5658	5417
30	5457	5373	5712	5408	5645
35	5480	5568	5350	5360	5352
40	5660	5323	5652	5520	5573
45	5468	5299	5470	5634	5285
50	5274	5486	5275	5349	5298
55	5680	5416	5463	5512	5251
60	5713	5474	5667	5683	5453
65	5282	5438	5718	5566	5534
70	5399	5514	5656	5633	5409
75	5567	5584	5338	5545	5623
80	5490	5663	5612	5309	5406
85	5694	5525	5499	5448	5294
90	5574	5332	5659	5370	5436
95	5477	5415	5542	5467	5319

Type 6 Radar Waveform_24

Frequency List (MHz)	0	1	2	3	4
0	5299	5472	5698	5381	5721
5	5477	5574	5535	5508	5614
10	5668	5582	5617	5367	5251
15	5351	5383	5505	5604	5527
20	5660	5647	5328	5335	5549
25	5590	5488	5700	5403	5414
30	5588	5389	5703	5309	5571
35	5364	5503	5274	5666	5365
40	5261	5417	5517	5405	5448
45	5382	5528	5687	5695	5537
50	5717	5393	5370	5653	5331
55	5600	5270	5639	5612	5515
60	5376	5667	5269	5252	5677
65	5586	5642	5258	5636	5543
70	5458	5479	5623	5400	5444
75	5301	5372	5428	5341	5575
80	5290	5316	5345	5347	5627
85	5349	5470	5565	5432	5628
90	5676	5447	5672	5552	5468
95	5469	5359	5321	5325	5678

Type 6 Radar Waveform_25

Frequency List (MHz)	0	1	2	3	4
0	5457	5711	5634	5542	5563
5	5616	5596	5610	5671	5346
10	5599	5371	5658	5562	5638
15	5339	5381	5486	5453	5321
20	5535	5351	5588	5417	5308
25	5586	5498	5318	5289	5522
30	5364	5292	5706	5426	5448
35	5662	5257	5656	5663	5505
40	5674	5657	5514	5334	5428
45	5465	5489	5265	5437	5404
50	5396	5373	5564	5581	5324
55	5368	5625	5571	5399	5329
60	5557	5347	5677	5271	5462
65	5541	5576	5383	5280	5250
70	5261	5485	5519	5502	5578
75	5525	5604	5652	5613	5700
80	5435	5400	5609	5331	5635
85	5385	5281	5299	5595	5350
90	5382	5407	5695	5546	5683
95	5607	5263	5655	5550	5459

Type 6 Radar Waveform_26						
Frequency List (MHz)	0	1	2	3	4	
0	5712	5475	5570	5703	5308	
5	5658	5521	5685	5359	5650	
10	5433	5257	5699	5282	5659	
15	5427	5508	5589	5498	5610	
20	5446	5420	5626	5409	5281	
25	5377	5350	5424	5393	5556	
30	5406	5656	5328	5315	5721	
35	5587	5278	5528	5431	5674	
40	5441	5531	5515	5422	5608	
45	5263	5408	5548	5547	5318	
50	5324	5280	5572	5639	5542	
55	5671	5294	5558	5347	5494	
60	5502	5654	5600	5692	5663	
65	5662	5577	5311	5414	5661	
70	5352	5711	5361	5334	5398	
75	5461	5289	5698	5668	5585	
80	5429	5723	5481	5629	5595	
85	5300	5329	5331	5597	5598	
90	5624	5368	5645	5679	5485	
95	5707	5563	5591	5636	5537	
Type 6 Radar Waveform_27						
Frequency List (MHz)	0	1	2	3	4	
0	5492	5714	5506	5389	5625	
5	5700	5543	5285	5522	5382	
10	5364	5521	5265	5477	5680	
15	5418	5635	5692	5327	5454	
20	5586	5567	5498	5254	5299	
25	5627	5594	5590	5448	5642	
30	5661	5564	5541	5629	5369	
35	5324	5584	5588	5280	5614	
40	5453	5565	5605	5570	5291	
45	5631	5371	5589	5534	5273	
50	5690	5494	5355	5482	5707	
55	5641	5513	5657	5659	5544	
60	5486	5426	5638	5611	5516	
65	5618	5684	5464	5697	5658	
70	5374	5420	5258	5721	5566	
75	5681	5358	5262	5696	5297	
80	5621	5709	5439	5672	5304	
85	5616	5368	5491	5475	5341	
90	5580	5318	5281	5380	5519	
95	5537	5362	5645	5524	5325	

Type 6 Radar Waveform_28

Frequency List (MHz)	0	1	2	3	4
0	5272	5478	5539	5550	5370
5	5267	5565	5360	5588	5589
10	5295	5310	5306	5672	5701
15	5506	5287	5320	5491	5519
20	5462	5655	5508	5490	5702
25	5531	5626	5355	5698	5624
30	5717	5401	5716	5264	5293
35	5557	5692	5262	5502	5594
40	5319	5391	5330	5602	5499
45	5271	5336	5663	5424	5476
50	5410	5449	5266	5342	5317
55	5299	5670	5564	5463	5460
60	5387	5311	5349	5489	5415
65	5252	5681	5687	5560	5552
70	5353	5576	5593	5683	5464
75	5507	5350	5379	5605	5366
80	5382	5547	5361	5371	5518
85	5385	5721	5294	5341	5612
90	5378	5621	5389	5457	5292
95	5534	5497	5412	5374	5597

Type 6 Radar Waveform_29

Frequency List (MHz)	0	1	2	3	4
0	5430	5717	5475	5711	5687
5	5406	5490	5435	5276	5321
10	5604	5574	5444	5295	5722
15	5594	5414	5326	5536	5373
20	5346	5546	5579	5675	5419
25	5478	5558	5327	5658	5629
30	5420	5674	5519	5559	5432
35	5648	5488	5512	5513	5433
40	5402	5329	5570	5599	5331
45	5251	5624	5477	5266	5286
50	5625	5317	5431	5518	5621
55	5653	5279	5358	5343	5514
60	5434	5650	5627	5413	5509
65	5491	5660	5371	5545	5665
70	5291	5467	5259	5338	5486
75	5428	5528	5613	5481	5299
80	5549	5309	5612	5695	5681
85	5581	5422	5540	5386	5699
90	5503	5446	5256	5462	5640
95	5427	5377	5487	5398	5307

Test Site	WJ-SR8	Test Engineer	Jake Lan
Test Date	2026-02-08		
Test Item	Radar Statistical Performance Check (802.11be-EHT40 - 5510 MHz)		

Radar Type 1-4 - Radar Statistical Performance								
Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect
0	5530	1	5490	1	5530	1	5500	1
1	5501	1	5530	1	5490	1	5504	0
2	5520	1	5518	1	5521	1	5499	1
3	5503	1	5524	1	5492	1	5501	1
4	5521	1	5523	1	5510	1	5520	1
5	5505	1	5519	1	5499	1	5513	1
6	5492	1	5514	0	5523	1	5497	0
7	5507	1	5526	1	5505	1	5492	1
8	5497	0	5505	1	5502	1	5527	1
9	5512	1	5517	1	5520	0	5524	0
10	5496	1	5510	1	5511	1	5505	1
11	5495	1	5506	0	5518	1	5502	1
12	5528	1	5521	0	5509	1	5514	1
13	5508	1	5499	1	5522	0	5522	1
14	5509	1	5507	1	5500	1	5507	1
15	5502	1	5525	1	5513	1	5509	0
16	5493	1	5493	1	5524	1	5510	1
17	5500	1	5508	0	5515	0	5516	1
18	5506	1	5504	0	5501	1	5529	0
19	5513	1	5512	1	5495	1	5508	1
20	5519	1	5509	1	5527	1	5503	1
21	5511	1	5496	1	5526	1	5517	1
22	5515	1	5502	1	5498	0	5490	1
23	5504	1	5492	0	5519	0	5528	1
24	5529	1	5494	1	5516	1	5518	0
25	5510	1	5516	1	5506	1	5521	1
26	5499	1	5511	0	5504	0	5530	1
27	5524	1	5515	1	5497	1	5491	1



Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency	1=detect	Frequency	1=detect	Frequency	1=detect	Frequency	1=detect
	(MHz)	0=no detect	(MHz)	0=no detect	(MHz)	0=no detect	(MHz)	0=no detect
28	5490	1	5522	1	5525	0	5495	1
29	5494	1	5520	0	5493	0	5506	1
Probability:	96.7%		73.3%		73.3%		80.0%	
Aggregate:	80.8% (>80%)							

Radar Type 1 - Radar Waveform							Radar Type 2 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 1	1.0	938.0	57	53466.0	Download	0	Type 2	3.2	179.0	26	4654.0
Download	1	Type 1	1.0	698.0	76	53048.0	Download	1	Type 2	1.1	207.0	23	4761.0
Download	2	Type 1	1.0	618.0	86	53148.0	Download	2	Type 2	2.1	230.0	24	5520.0
Download	3	Type 1	1.0	538.0	99	53282.0	Download	3	Type 2	4.8	200.0	29	5800.0
Download	4	Type 1	1.0	878.0	61	53558.0	Download	4	Type 2	3.9	214.0	28	5992.0
Download	5	Type 1	1.0	3066.0	18	55188.0	Download	5	Type 2	2.9	222.0	26	5772.0
Download	6	Type 1	1.0	638.0	83	52954.0	Download	6	Type 2	3.2	204.0	26	5304.0
Download	7	Type 1	1.0	918.0	58	53244.0	Download	7	Type 2	2.5	192.0	25	4800.0
Download	8	Type 1	1.0	838.0	63	52794.0	Download	8	Type 2	3.1	164.0	26	4264.0
Download	9	Type 1	1.0	858.0	62	53196.0	Download	9	Type 2	1.2	156.0	23	3588.0
Download	10	Type 1	1.0	798.0	67	53466.0	Download	10	Type 2	3.9	210.0	27	5670.0
Download	11	Type 1	1.0	718.0	74	53132.0	Download	11	Type 2	4.6	201.0	29	5829.0
Download	12	Type 1	1.0	578.0	92	53176.0	Download	12	Type 2	3.2	162.0	26	4212.0
Download	13	Type 1	1.0	598.0	89	53222.0	Download	13	Type 2	2.2	197.0	25	4925.0
Download	14	Type 1	1.0	558.0	95	53010.0	Download	14	Type 2	4.5	163.0	29	4727.0
Download	15	Type 1	1.0	2536.0	21	53256.0	Download	15	Type 2	3.0	203.0	26	5278.0
Download	16	Type 1	1.0	966.0	55	53130.0	Download	16	Type 2	5.0	168.0	29	4872.0
Download	17	Type 1	1.0	827.0	64	52928.0	Download	17	Type 2	2.4	217.0	25	5425.0
Download	18	Type 1	1.0	2501.0	22	55022.0	Download	18	Type 2	2.9	191.0	26	4966.0
Download	19	Type 1	1.0	2595.0	21	54495.0	Download	19	Type 2	2.3	166.0	25	4150.0
Download	20	Type 1	1.0	1114.0	48	53472.0	Download	20	Type 2	3.7	150.0	27	4050.0
Download	21	Type 1	1.0	1302.0	41	53382.0	Download	21	Type 2	2.2	176.0	25	4400.0
Download	22	Type 1	1.0	3045.0	18	54810.0	Download	22	Type 2	4.9	195.0	29	5655.0
Download	23	Type 1	1.0	1624.0	33	53592.0	Download	23	Type 2	2.9	202.0	26	5252.0
Download	24	Type 1	1.0	2878.0	19	54682.0	Download	24	Type 2	2.5	178.0	25	4450.0
Download	25	Type 1	1.0	1027.0	52	53404.0	Download	25	Type 2	1.1	206.0	23	4738.0
Download	26	Type 1	1.0	2485.0	22	54670.0	Download	26	Type 2	3.8	155.0	27	4185.0
Download	27	Type 1	1.0	1600.0	33	52800.0	Download	27	Type 2	4.7	157.0	29	4553.0
Download	28	Type 1	1.0	1172.0	46	53912.0	Download	28	Type 2	2.4	224.0	25	5600.0
Download	29	Type 1	1.0	1177.0	45	52965.0	Download	29	Type 2	4.2	159.0	28	4452.0



Radar Type 3 - Radar Waveform							Radar Type 4 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 3	8.2	355.0	17	6035.0	Download	0	Type 4	16.0	355.0	14	4970.0
Download	1	Type 3	6.1	487.0	16	7792.0	Download	1	Type 4	11.3	487.0	12	5844.0
Download	2	Type 3	7.1	344.0	16	5504.0	Download	2	Type 4	13.5	344.0	13	4472.0
Download	3	Type 3	9.8	288.0	18	5184.0	Download	3	Type 4	19.4	288.0	16	4608.0
Download	4	Type 3	8.9	230.0	18	4140.0	Download	4	Type 4	17.5	230.0	15	3450.0
Download	5	Type 3	7.9	432.0	17	7344.0	Download	5	Type 4	15.3	432.0	14	6048.0
Download	6	Type 3	8.2	207.0	17	3519.0	Download	6	Type 4	15.9	207.0	14	2898.0
Download	7	Type 3	7.5	443.0	17	7531.0	Download	7	Type 4	14.3	443.0	13	5759.0
Download	8	Type 3	8.1	439.0	17	7463.0	Download	8	Type 4	15.8	439.0	14	6146.0
Download	9	Type 3	6.2	223.0	16	3568.0	Download	9	Type 4	11.5	223.0	12	2676.0
Download	10	Type 3	8.9	208.0	18	3744.0	Download	10	Type 4	17.4	208.0	15	3120.0
Download	11	Type 3	9.6	463.0	18	8334.0	Download	11	Type 4	19.0	463.0	16	7408.0
Download	12	Type 3	8.2	441.0	17	7497.0	Download	12	Type 4	16.0	441.0	14	6174.0
Download	13	Type 3	7.2	323.0	16	5168.0	Download	13	Type 4	13.8	323.0	13	4199.0
Download	14	Type 3	9.5	297.0	18	5346.0	Download	14	Type 4	18.9	297.0	16	4752.0
Download	15	Type 3	8.0	412.0	17	7004.0	Download	15	Type 4	15.5	412.0	14	5768.0
Download	16	Type 3	10.0	324.0	18	5832.0	Download	16	Type 4	19.9	324.0	16	5184.0
Download	17	Type 3	7.4	271.0	17	4607.0	Download	17	Type 4	14.1	271.0	13	3523.0
Download	18	Type 3	7.9	349.0	17	5933.0	Download	18	Type 4	15.2	349.0	14	4886.0
Download	19	Type 3	7.3	409.0	16	6544.0	Download	19	Type 4	13.8	409.0	13	5317.0
Download	20	Type 3	8.7	373.0	18	6714.0	Download	20	Type 4	17.1	373.0	15	5595.0
Download	21	Type 3	7.2	254.0	16	4064.0	Download	21	Type 4	13.8	254.0	13	3302.0
Download	22	Type 3	9.9	274.0	18	4932.0	Download	22	Type 4	19.8	274.0	16	4384.0
Download	23	Type 3	7.9	278.0	17	4726.0	Download	23	Type 4	15.3	278.0	14	3892.0
Download	24	Type 3	7.5	317.0	17	5389.0	Download	24	Type 4	14.5	317.0	13	4121.0
Download	25	Type 3	6.1	260.0	16	4160.0	Download	25	Type 4	11.3	260.0	12	3120.0
Download	26	Type 3	8.8	211.0	18	3798.0	Download	26	Type 4	17.3	211.0	15	3165.0
Download	27	Type 3	9.7	272.0	18	4896.0	Download	27	Type 4	19.2	272.0	16	4352.0
Download	28	Type 3	7.4	264.0	17	4488.0	Download	28	Type 4	14.2	264.0	13	3432.0
Download	29	Type 3	9.2	284.0	18	5112.0	Download	29	Type 4	18.2	284.0	15	4260.0



Radar Type 5 - Radar Statistical Performance					
Trail #	Test Freq. (MHz)	1=Detection 0=No Detection	Trail #	Test Freq. (MHz)	1=Detection 0=No Detection
0	5510	1	15	5493.6	1
1	5510	1	16	5496.8	1
2	5510	1	17	5495.2	1
3	5510	1	18	5496.4	1
4	5510	1	19	5494.4	1
5	5510	1	20	5524	1
6	5510	1	21	5523.2	1
7	5510	1	22	5525.6	1
8	5510	1	23	5527.2	1
9	5510	1	24	5526	1
10	5498	1	25	5527.6	1
11	5498	1	26	5528	1
12	5496.8	1	27	5526.8	1
13	5497.6	1	28	5525.6	1
14	5495.2	1	29	5526	1
Detection Percentage (%)			100.0%		

Type 5 Radar Waveform_0								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	3849.0	88.2	17	3	1042.0	2000.0	1535.0	
1	174638.0	59.2	17	1	1755.0	—	—	
2	344423.0	87.5	17	3	1027.0	1107.0	1634.0	
3	513542.0	97.5	17	3	1766.0	1666.0	1927.0	
4	685739.0	82.6	17	2	1989.0	1015.0	—	
5	153591.0	60.3	17	1	1806.0	—	—	
6	323878.0	73.8	17	2	1295.0	1541.0	—	
7	492998.0	90.1	17	3	1352.0	1679.0	1783.0	
8	665832.0	57.8	17	1	1850.0	—	—	
9	132457.0	80.1	17	2	1297.0	1041.0	—	
10	302227.0	97.6	17	3	1617.0	1555.0	1166.0	
11	471707.0	97.9	17	3	1900.0	1879.0	1550.0	
12	642474.0	87.8	17	3	1778.0	1336.0	1275.0	
13	111143.0	94.5	17	3	1130.0	1405.0	1676.0	
14	281956.0	75.5	17	2	1087.0	1537.0	—	
15	453310.0	64.5	17	1	1395.0	—	—	
16	621183.0	87.6	17	3	1808.0	1632.0	1327.0	
Type 5 Radar Waveform_1								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	153827.0	77.7	7	2	1949.0	1163.0	—	
1	443481.0	86.8	7	3	1469.0	1988.0	1350.0	
2	734511.0	70.0	7	2	1623.0	1298.0	—	
3	1023488.0	84.3	7	3	1701.0	1022.0	1777.0	
4	117953.0	89.0	7	3	1141.0	1917.0	1246.0	
5	408250.0	68.8	7	2	1736.0	1680.0	—	
6	699462.0	57.0	7	1	1698.0	—	—	
7	988826.0	66.9	7	2	1369.0	1857.0	—	
8	82449.0	54.2	7	1	1150.0	—	—	
9	373081.0	50.2	7	1	1559.0	—	—	
Type 5 Radar Waveform_2								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	389915.0	61.6	16	1	1858.0	—	—	
1	559695.0	69.3	16	2	1430.0	1644.0	—	
2	27356.0	67.6	16	2	1048.0	1584.0	—	
3	197654.0	81.0	16	2	1594.0	1972.0	—	
4	368934.0	57.5	16	1	1760.0	—	—	
5	537801.0	99.7	16	3	1399.0	1799.0	1047.0	
6	6330.0	93.6	16	3	1456.0	1903.0	1134.0	
7	177110.0	65.8	16	1	1827.0	—	—	
8	346622.0	96.1	16	3	1884.0	1205.0	1256.0	
9	516743.0	89.9	16	3	1530.0	1595.0	1252.0	
10	689864.0	55.0	16	1	1330.0	—	—	
11	155858.0	77.2	16	2	1314.0	1500.0	—	
12	325947.0	71.6	16	2	1991.0	1743.0	—	
13	497923.0	65.1	16	1	1353.0	—	—	
14	666046.0	86.2	16	3	1110.0	1699.0	1439.0	
15	134680.0	91.8	16	3	1028.0	1390.0	1307.0	
16	306142.0	57.1	16	1	1039.0	—	—	

Type 5 Radar Waveform_3								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	403972.0	69.7	20	2	1344.0	1834.0	-	
1	547141.0	94.6	20	3	1282.0	1820.0	1793.0	
2	96389.0	91.5	20	3	1302.0	1478.0	1983.0	
3	241997.0	50.0	20	1	1687.0	-	-	
4	386071.0	99.0	20	3	1014.0	1112.0	1162.0	
5	532118.0	63.8	20	1	1798.0	-	-	
6	79039.0	54.1	20	1	1493.0	-	-	
7	224243.0	56.5	20	1	1366.0	-	-	
8	368214.0	73.4	20	2	1557.0	1781.0	-	
9	512939.0	86.7	20	3	1116.0	1144.0	1059.0	
10	61004.0	69.5	20	2	1843.0	1164.0	-	
11	205116.0	99.2	20	3	1619.0	1650.0	1702.0	
12	350201.0	90.4	20	3	1360.0	1019.0	1279.0	
13	495095.0	80.5	20	2	1513.0	1829.0	-	
14	43146.0	80.5	20	2	1788.0	1540.0	-	
15	187937.0	78.4	20	2	1652.0	1424.0	-	
16	333588.0	60.0	20	1	1501.0	-	-	
17	478572.0	62.2	20	1	1714.0	-	-	
18	25361.0	70.8	20	2	1281.0	1089.0	-	
19	169612.0	90.3	20	3	1772.0	1304.0	1729.0	
Type 5 Radar Waveform_4								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	393398.0	99.2	15	3	1571.0	1191.0	1459.0	
1	573747.0	90.0	15	3	1326.0	1703.0	1875.0	
2	9366.0	98.2	15	3	1083.0	1925.0	1453.0	
3	190080.0	94.3	15	3	1749.0	1993.0	1118.0	
4	372052.0	78.7	15	2	1201.0	1143.0	-	
5	552291.0	79.4	15	2	1855.0	1964.0	-	
6	734155.0	74.6	15	2	1408.0	1503.0	-	
7	168258.0	82.6	15	2	1285.0	1629.0	-	
8	350106.0	50.5	15	1	1511.0	-	-	
9	531331.0	65.2	15	1	1944.0	-	-	
10	713582.0	54.9	15	1	1079.0	-	-	
11	145599.0	98.1	15	3	1529.0	1848.0	1280.0	
12	326327.0	97.3	15	3	1627.0	1757.0	1367.0	
13	509334.0	61.7	15	1	1428.0	-	-	
14	688169.0	87.3	15	3	1589.0	1496.0	1287.0	
15	123613.0	72.4	15	2	1659.0	1301.0	-	
Type 5 Radar Waveform_5								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	488841.0	62.7	8	1	1865.0	-	-	
1	779888.0	50.2	8	1	1156.0	-	-	
2	1070172.0	62.7	8	1	1686.0	-	-	
3	162528.0	55.5	8	1	1383.0	-	-	
4	453345.0	63.4	8	1	1080.0	-	-	
5	742988.0	74.4	8	2	1681.0	1224.0	-	
6	1031569.0	84.1	8	3	1810.0	1898.0	1226.0	
7	126730.0	63.0	8	1	1286.0	-	-	
8	416642.0	74.1	8	2	1817.0	1805.0	-	
9	707018.0	66.7	8	2	1618.0	1637.0	-	

Type 5 Radar Waveform_6								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	712707.0	55.7	12	1	1877.0	—	—	
1	64910.0	59.4	12	1	1346.0	—	—	
2	271933.0	74.5	12	2	1490.0	1534.0	—	
3	477811.0	98.8	12	3	1994.0	1525.0	1775.0	
4	687211.0	61.5	12	1	1809.0	—	—	
5	39331.0	52.9	12	1	1612.0	—	—	
6	246977.0	65.4	12	1	1084.0	—	—	
7	454300.0	51.5	12	1	1646.0	—	—	
8	662283.0	57.9	12	1	1002.0	—	—	
9	13762.0	79.7	12	2	1073.0	1237.0	—	
10	220594.0	96.5	12	3	1677.0	1258.0	1277.0	
11	427589.0	97.3	12	3	1072.0	1056.0	1819.0	
12	635278.0	71.4	12	2	1309.0	1613.0	—	
13	841720.0	69.5	12	2	1786.0	1880.0	—	
Type 5 Radar Waveform_7								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	151485.0	89.2	17	3	1696.0	1566.0	1193.0	
1	312430.0	71.5	17	2	1769.0	1969.0	—	
2	474979.0	56.0	17	1	1261.0	—	—	
3	636212.0	58.2	17	1	1417.0	—	—	
4	132007.0	81.7	17	2	1060.0	1860.0	—	
5	292913.0	71.4	17	2	1764.0	1322.0	—	
6	455184.0	51.9	17	1	1140.0	—	—	
7	615520.0	78.7	17	2	1147.0	1153.0	—	
8	112061.0	93.2	17	3	1051.0	1381.0	1184.0	
9	273792.0	58.1	17	1	1379.0	—	—	
10	435276.0	65.6	17	1	1179.0	—	—	
11	596647.0	59.7	17	1	1213.0	—	—	
12	92224.0	99.5	17	3	1462.0	1093.0	1262.0	
13	254011.0	65.2	17	1	1133.0	—	—	
14	414287.0	76.8	17	2	1738.0	1216.0	—	
15	575210.0	74.7	17	2	1276.0	1734.0	—	
16	72683.0	55.9	17	1	1434.0	—	—	
17	232817.0	85.1	17	3	1952.0	1438.0	1470.0	
Type 5 Radar Waveform_8								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	711720.0	70.1	7	2	1050.0	1416.0	—	
1	1002950.0	62.0	7	1	1523.0	—	—	
2	95000.0	73.7	7	2	1451.0	1840.0	—	
3	385768.0	65.1	7	1	1648.0	—	—	
4	676482.0	58.0	7	1	1515.0	—	—	
5	967565.0	51.7	7	1	1003.0	—	—	
6	59354.0	53.6	7	1	1169.0	—	—	
7	349892.0	52.0	7	1	1908.0	—	—	
8	639772.0	82.7	7	2	1967.0	1241.0	—	
9	928949.0	95.8	7	3	1260.0	1815.0	1526.0	

Type 5 Radar Waveform_9								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	15674.0	53.7	14	1	1770.0	—	—	
1	209230.0	57.6	14	1	1922.0	—	—	
2	401971.0	76.0	14	2	1982.0	1560.0	—	
3	596943.0	65.4	14	1	1127.0	—	—	
4	789228.0	78.9	14	2	1284.0	1324.0	—	
5	184795.0	93.3	14	3	1145.0	1741.0	1590.0	
6	379048.0	66.3	14	1	1708.0	—	—	
7	570692.0	92.0	14	3	1467.0	1711.0	1273.0	
8	765665.0	68.3	14	2	1085.0	1254.0	—	
9	161208.0	75.9	14	2	1663.0	1930.0	—	
10	354807.0	81.3	14	2	1341.0	1251.0	—	
11	548816.0	52.7	14	1	1700.0	—	—	
12	742220.0	64.7	14	1	1926.0	—	—	
13	137556.0	77.1	14	2	1609.0	1168.0	—	
14	331334.0	66.3	14	1	1750.0	—	—	
Type 5 Radar Waveform_10								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	393769.0	66.4	20	1	1209.0	—	—	
1	536955.0	83.1	20	2	1602.0	1873.0	—	
2	85454.0	51.7	20	1	1038.0	—	—	
3	230674.0	53.4	20	1	1161.0	—	—	
4	375739.0	50.1	20	1	1435.0	—	—	
5	518953.0	74.7	20	2	1771.0	1912.0	—	
6	67405.0	83.2	20	2	1176.0	1239.0	—	
7	212179.0	73.7	20	2	1196.0	1668.0	—	
8	357840.0	61.3	20	1	1463.0	—	—	
9	501755.0	77.1	20	2	1441.0	1509.0	—	
10	49652.0	59.4	20	1	1221.0	—	—	
11	193693.0	95.9	20	3	1561.0	1693.0	1598.0	
12	338886.0	74.0	20	2	1429.0	1924.0	—	
13	485212.0	63.4	20	1	1354.0	—	—	
14	31764.0	54.3	20	1	1203.0	—	—	
15	176861.0	54.6	20	1	1645.0	—	—	
16	321126.0	79.7	20	2	1688.0	1545.0	—	
17	464308.0	88.7	20	3	1870.0	1552.0	1800.0	
18	13880.0	56.2	20	1	1032.0	—	—	
19	158813.0	74.9	20	2	1120.0	1175.0	—	

Type 5 Radar Waveform_11								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	302638.0	85.6	20	3	1331.0	1803.0	1398.0
	1	447735.0	82.2	20	2	1716.0	1914.0	—
	2	594952.0	50.2	20	1	1034.0	—	—
	3	140855.0	80.9	20	2	1294.0	1433.0	—
	4	286536.0	56.2	20	1	1005.0	—	—
	5	428985.0	99.0	20	3	1818.0	1259.0	1849.0
	6	573324.0	84.8	20	3	1124.0	1811.0	1975.0
	7	123362.0	56.4	20	1	1025.0	—	—
	8	267892.0	80.1	20	2	1123.0	1553.0	—
	9	413393.0	53.7	20	1	1763.0	—	—
	10	557681.0	67.4	20	2	1211.0	1412.0	—
	11	104742.0	97.3	20	3	1918.0	1662.0	1569.0
	12	249556.0	96.7	20	3	1253.0	1483.0	1115.0
	13	393657.0	98.9	20	3	1797.0	1174.0	1611.0
	14	537884.0	91.7	20	3	1563.0	1489.0	1730.0
	15	87321.0	68.6	20	2	1457.0	1300.0	—
	16	232502.0	51.8	20	1	1907.0	—	—
	17	376126.0	98.6	20	3	1504.0	1437.0	1235.0
	18	521638.0	82.5	20	2	1026.0	1998.0	—
	19	69433.0	71.0	20	2	1358.0	1792.0	—
Type 5 Radar Waveform_12								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	252050.0	70.5	17	2	1767.0	1761.0	—
	1	421359.0	83.9	17	3	1813.0	1543.0	1892.0
	2	594852.0	64.6	17	1	1021.0	—	—
	3	60606.0	88.3	17	3	1977.0	1675.0	1248.0
	4	231374.0	69.5	17	2	1486.0	1109.0	—
	5	400301.0	97.4	17	3	1709.0	1824.0	1936.0
	6	570761.0	92.3	17	3	1636.0	1223.0	1889.0
	7	39803.0	78.5	17	2	1378.0	1067.0	—
	8	210678.0	64.0	17	1	1547.0	—	—
	9	380852.0	71.2	17	2	1649.0	1097.0	—
	10	552645.0	51.5	17	1	1139.0	—	—
	11	18809.0	64.0	17	1	1691.0	—	—
	12	189724.0	58.5	17	1	1222.0	—	—
	13	360292.0	52.1	17	1	1874.0	—	—
	14	529542.0	80.8	17	2	1946.0	1910.0	—
	15	699404.0	84.3	17	3	1214.0	1673.0	1371.0
	16	168219.0	82.9	17	2	1481.0	1635.0	—

Type 5 Radar Waveform_13								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	303164.0	70.9	19	2	1106.0	1370.0	—	
1	454765.0	97.3	19	3	1125.0	1375.0	1323.0	
2	609672.0	51.2	19	1	1076.0	—	—	
3	131359.0	90.0	19	3	1581.0	1291.0	1671.0	
4	284273.0	76.8	19	2	1362.0	1328.0	—	
5	435310.0	93.7	19	3	1987.0	1765.0	1081.0	
6	590049.0	57.6	19	1	1916.0	—	—	
7	113134.0	59.7	19	1	1722.0	—	—	
8	265845.0	62.1	19	1	1838.0	—	—	
9	416680.0	99.3	19	3	1759.0	1888.0	1044.0	
10	570549.0	75.2	19	2	1121.0	1554.0	—	
11	94185.0	71.8	19	2	1033.0	1574.0	—	
12	245781.0	85.7	19	3	1992.0	1804.0	1230.0	
13	399678.0	52.7	19	1	1973.0	—	—	
14	551068.0	81.2	19	2	1740.0	1725.0	—	
15	75579.0	56.2	19	1	1065.0	—	—	
16	227451.0	85.2	19	3	1009.0	1826.0	1122.0	
17	380976.0	54.3	19	1	1796.0	—	—	
18	533907.0	51.6	19	1	1573.0	—	—	
Type 5 Radar Waveform_14								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	76870.0	67.5	13	2	1445.0	1542.0	—	
1	284500.0	61.9	13	1	1572.0	—	—	
2	491969.0	61.3	13	1	1631.0	—	—	
3	699212.0	58.8	13	1	1931.0	—	—	
4	51454.0	56.6	13	1	1290.0	—	—	
5	258842.0	56.3	13	1	1897.0	—	—	
6	464499.0	92.4	13	3	1685.0	1713.0	1739.0	
7	673938.0	58.8	13	1	1582.0	—	—	
8	25881.0	52.1	13	1	1476.0	—	—	
9	233405.0	53.4	13	1	1484.0	—	—	
10	439453.0	88.7	13	3	1832.0	1008.0	1507.0	
11	646176.0	94.5	13	3	1082.0	1984.0	1423.0	
12	318.0	68.1	13	2	1063.0	1762.0	—	
13	207733.0	57.3	13	1	1935.0	—	—	
Type 5 Radar Waveform_15								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	527656.0	85.7	9	3	1355.0	1234.0	1345.0	
1	792309.0	80.9	9	2	1420.0	1103.0	—	
2	1056926.0	51.2	9	1	1854.0	—	—	
3	231729.0	81.2	9	2	1683.0	1443.0	—	
4	495918.0	81.1	9	2	1308.0	1012.0	—	
5	758250.0	93.8	9	3	1450.0	1682.0	1603.0	
6	1022573.0	90.2	9	3	1066.0	1105.0	1616.0	
7	199453.0	57.0	9	1	1921.0	—	—	
8	463091.0	78.6	9	2	1402.0	1638.0	—	
9	727715.0	57.3	9	1	1871.0	—	—	
10	989544.0	98.2	9	3	1249.0	1386.0	1758.0	

Type 5 Radar Waveform_16								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	107787.0	67.1	17	2	1272.0	1409.0	-	
1	278931.0	56.7	17	1	1178.0	-	-	
2	448317.0	78.3	17	2	1641.0	1929.0	-	
3	618804.0	68.4	17	2	1780.0	1615.0	-	
4	86781.0	70.4	17	2	1333.0	1332.0	-	
5	257920.0	57.7	17	1	1064.0	-	-	
6	427516.0	73.3	17	2	1794.0	1480.0	-	
7	596550.0	97.9	17	3	1018.0	1985.0	1881.0	
8	65777.0	79.1	17	2	1431.0	1194.0	-	
9	236227.0	66.7	17	2	1069.0	1890.0	-	
10	406827.0	71.0	17	2	1678.0	1075.0	-	
11	578148.0	59.5	17	1	1791.0	-	-	
12	44609.0	88.4	17	3	1919.0	1746.0	1449.0	
13	214808.0	94.7	17	3	1384.0	1847.0	1098.0	
14	385050.0	83.6	17	3	1303.0	1382.0	1475.0	
15	555012.0	84.5	17	3	1640.0	1392.0	1415.0	
16	23707.0	84.9	17	3	1068.0	1266.0	1812.0	
Type 5 Radar Waveform_17								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	220666.0	55.4	13	1	1396.0	-	-	
1	414327.0	56.3	13	1	1444.0	-	-	
2	606701.0	73.4	13	2	1447.0	1707.0	-	
3	3121.0	54.7	13	1	1506.0	-	-	
4	196855.0	57.1	13	1	1206.0	-	-	
5	390221.0	64.4	13	1	1955.0	-	-	
6	584439.0	50.0	13	1	1043.0	-	-	
7	775707.0	71.9	13	2	1628.0	1986.0	-	
8	172752.0	79.9	13	2	1092.0	1219.0	-	
9	365783.0	75.1	13	2	1823.0	1432.0	-	
10	559924.0	54.1	13	1	1966.0	-	-	
11	753920.0	60.6	13	1	1491.0	-	-	
12	149123.0	61.4	13	1	1232.0	-	-	
13	342656.0	60.5	13	1	1684.0	-	-	
14	534047.0	83.4	13	3	1670.0	1539.0	1787.0	
Type 5 Radar Waveform_18								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	643550.0	54.0	16	1	2000.0	-	-	
1	110419.0	60.7	16	1	1756.0	-	-	
2	279847.0	89.5	16	3	1695.0	1774.0	1656.0	
3	450910.0	99.7	16	3	1210.0	1159.0	1031.0	
4	622558.0	64.1	16	1	1960.0	-	-	
5	89042.0	90.4	16	3	1488.0	1723.0	1242.0	
6	259508.0	81.8	16	2	1614.0	1899.0	-	
7	429451.0	95.7	16	3	1414.0	1149.0	1610.0	
8	602077.0	65.3	16	1	1318.0	-	-	
9	68104.0	96.6	16	3	1220.0	1524.0	1528.0	
10	237905.0	89.0	16	3	1721.0	1906.0	1712.0	
11	408260.0	90.7	16	3	1626.0	1839.0	1099.0	
12	581174.0	64.7	16	1	1142.0	-	-	
13	47237.0	71.4	16	2	1006.0	1878.0	-	
14	218092.0	62.8	16	1	1737.0	-	-	
15	387980.0	86.5	16	3	1074.0	1010.0	1263.0	
16	557683.0	97.5	16	3	1045.0	1895.0	1268.0	

Type 5 Radar Waveform_19								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	34379.0	59.3	11	1	1887.0	—	—	
1	257920.0	55.3	11	1	1446.0	—	—	
2	481364.0	51.6	11	1	1600.0	—	—	
3	703852.0	72.2	11	2	1195.0	1710.0	—	
4	6834.0	84.0	11	3	1902.0	1830.0	1461.0	
5	229558.0	93.4	11	3	1913.0	1807.0	1040.0	
6	453770.0	60.0	11	1	1732.0	—	—	
7	675601.0	92.3	11	3	1835.0	1070.0	1036.0	
8	898829.0	78.3	11	2	1689.0	1937.0	—	
9	202265.0	96.6	11	3	1244.0	1455.0	1421.0	
10	424975.0	90.5	11	3	1427.0	1466.0	1586.0	
11	648866.0	82.7	11	2	1197.0	1719.0	—	
12	872076.0	69.2	11	2	1403.0	1468.0	—	
Type 5 Radar Waveform_20								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	141790.0	87.3	15	3	1630.0	1536.0	1465.0	
1	323301.0	67.6	15	2	1706.0	1227.0	—	
2	505208.0	56.2	15	1	1866.0	—	—	
3	684123.0	87.6	15	3	1363.0	1779.0	1482.0	
4	120055.0	55.5	15	1	1311.0	—	—	
5	301208.0	77.7	15	2	1029.0	1343.0	—	
6	482842.0	55.1	15	1	1891.0	—	—	
7	661569.0	84.0	15	3	1867.0	1606.0	1474.0	
8	97496.0	70.3	15	2	1728.0	1058.0	—	
9	278267.0	94.5	15	3	1356.0	1269.0	1374.0	
10	460264.0	73.6	15	2	1186.0	1077.0	—	
11	642399.0	60.7	15	1	1348.0	—	—	
12	75257.0	58.0	15	1	1956.0	—	—	
13	256983.0	58.2	15	1	1078.0	—	—	
14	437478.0	68.1	15	2	1556.0	1472.0	—	
15	618977.0	73.8	15	2	1128.0	1495.0	—	
Type 5 Radar Waveform_21								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	46832.0	85.3	17	3	1419.0	1851.0	1288.0	
1	208409.0	50.4	17	1	1380.0	—	—	
2	368792.0	67.0	17	2	1893.0	1233.0	—	
3	528415.0	88.6	17	3	1934.0	1337.0	1492.0	
4	27183.0	56.6	17	1	1347.0	—	—	
5	188405.0	51.3	17	1	1837.0	—	—	
6	349672.0	56.1	17	1	1790.0	—	—	
7	510878.0	58.9	17	1	1852.0	—	—	
8	7301.0	61.1	17	1	1856.0	—	—	
9	168372.0	70.0	17	2	1514.0	1000.0	—	
10	329396.0	67.3	17	2	1023.0	1599.0	—	
11	490050.0	79.5	17	2	1199.0	1962.0	—	
12	652648.0	57.3	17	1	1452.0	—	—	
13	148071.0	85.8	17	3	1190.0	1385.0	1995.0	
14	309115.0	93.8	17	3	1321.0	1158.0	1095.0	
15	469025.0	91.4	17	3	1440.0	1844.0	1575.0	
16	632293.0	62.9	17	1	1959.0	—	—	
17	128318.0	96.2	17	3	1454.0	1325.0	1653.0	

Type 5 Radar Waveform_22								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	435804.0	59.3	11	1	1129.0	—	—	
1	677281.0	71.4	11	2	1091.0	1188.0	—	
2	917728.0	84.4	11	3	1270.0	1104.0	1567.0	
3	163345.0	77.1	11	2	1361.0	1970.0	—	
4	405777.0	65.8	11	1	1588.0	—	—	
5	646021.0	85.2	11	3	1601.0	1401.0	1517.0	
6	888802.0	81.4	11	2	1692.0	1317.0	—	
7	133856.0	63.5	11	1	1200.0	—	—	
8	374733.0	89.0	11	3	1718.0	1753.0	1349.0	
9	618130.0	60.9	11	1	1533.0	—	—	
10	858878.0	78.0	11	2	1546.0	1625.0	—	
11	104035.0	61.5	11	1	1030.0	—	—	
Type 5 Radar Waveform_23								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	461226.0	75.9	7	2	1173.0	1726.0	—	
1	782607.0	85.2	7	3	1938.0	1776.0	1377.0	
2	1105247.0	91.9	7	3	1477.0	1816.0	1198.0	
3	98812.0	68.5	7	2	1744.0	1108.0	—	
4	420904.0	93.1	7	3	1473.0	1278.0	1968.0	
5	743281.0	96.2	7	3	1342.0	1135.0	1980.0	
6	1066865.0	73.4	7	2	1339.0	1510.0	—	
7	59021.0	94.2	7	3	1170.0	1283.0	1387.0	
8	382087.0	62.6	7	1	1672.0	—	—	
Type 5 Radar Waveform_24								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	526986.0	86.0	10	3	1570.0	1724.0	1372.0	
1	771010.0	61.5	10	1	1267.0	—	—	
2	14454.0	97.4	10	3	1643.0	1215.0	1622.0	
3	256060.0	76.5	10	2	1905.0	1947.0	—	
4	497311.0	85.5	10	3	1238.0	1948.0	1359.0	
5	741236.0	60.4	10	1	1182.0	—	—	
6	981623.0	75.7	10	2	1950.0	1119.0	—	
7	226342.0	76.6	10	2	1752.0	1920.0	—	
8	467774.0	84.6	10	3	1231.0	1841.0	1046.0	
9	711148.0	50.6	10	1	1532.0	—	—	
10	952025.0	82.2	10	2	1185.0	1690.0	—	
11	196319.0	97.8	10	3	1882.0	1568.0	1531.0	
Type 5 Radar Waveform_25								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	585915.0	61.9	6	1	1204.0	—	—	
1	906431.0	98.9	6	3	1596.0	1961.0	1410.0	
2	1229763.0	96.8	6	3	1368.0	1247.0	1096.0	
3	222474.0	89.4	6	3	1565.0	1583.0	1406.0	
4	546102.0	58.1	6	1	1243.0	—	—	
5	867474.0	84.6	6	3	1052.0	1315.0	1485.0	
6	1190964.0	81.9	6	2	1100.0	1580.0	—	
7	183259.0	57.2	6	1	1057.0	—	—	
8	505231.0	93.2	6	3	1004.0	1289.0	1782.0	

Type 5 Radar Waveform_26								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	932770.0	62.3	5	1	1853.0	—	—
	1	1294406.0	95.3	5	3	1217.0	1502.0	1113.0
	2	161133.0	80.9	5	2	1974.0	1605.0	—
	3	523790.0	99.6	5	3	1727.0	1114.0	1516.0
	4	886683.0	94.2	5	3	1132.0	1674.0	1293.0
	5	1250682.0	82.1	5	2	1551.0	1117.0	—
	6	116285.0	87.7	5	3	1894.0	1802.0	1720.0
	7	479388.0	88.9	5	3	1171.0	1212.0	1102.0
Type 5 Radar Waveform_27								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	611741.0	92.8	8	3	1157.0	1607.0	1316.0
	1	874978.0	97.7	8	3	1608.0	1393.0	1518.0
	2	52138.0	68.0	8	2	1527.0	1591.0	—
	3	315728.0	68.8	8	2	1971.0	1953.0	—
	4	579384.0	83.5	8	3	1394.0	1407.0	1071.0
	5	844067.0	73.4	8	2	1218.0	1310.0	—
	6	19674.0	59.8	8	1	1296.0	—	—
	7	283062.0	87.1	8	3	1864.0	1745.0	1055.0
	8	547981.0	50.6	8	1	1742.0	—	—
	9	811285.0	80.4	8	2	1731.0	1155.0	—
	10	1075618.0	74.8	8	2	1391.0	1037.0	—
Type 5 Radar Waveform_28								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	212694.0	55.6	11	1	1177.0	—	—
	1	435061.0	86.9	11	3	1126.0	1400.0	1236.0
	2	659474.0	54.4	11	1	1735.0	—	—
	3	882835.0	60.2	11	1	1833.0	—	—
	4	184425.0	95.8	11	3	1013.0	1814.0	1978.0
	5	408715.0	63.8	11	1	1240.0	—	—
	6	632213.0	63.9	11	1	1351.0	—	—
	7	852755.0	86.4	11	3	1187.0	1943.0	1458.0
	8	157077.0	95.1	11	3	1020.0	1911.0	1373.0
	9	380542.0	79.2	11	2	1250.0	1522.0	—
	10	602815.0	84.9	11	3	1167.0	1138.0	1885.0
	11	828177.0	61.5	11	1	1404.0	—	—
	12	129510.0	91.5	11	3	1773.0	1896.0	1487.0
Type 5 Radar Waveform_29								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	382027.0	87.0	10	3	1471.0	1365.0	1320.0
	1	624636.0	69.5	10	2	1274.0	1148.0	—
	2	866272.0	73.6	10	2	1479.0	1299.0	—
	3	111061.0	66.3	10	1	1389.0	—	—
	4	353283.0	66.4	10	1	1312.0	—	—
	5	594204.0	76.9	10	2	1901.0	1578.0	—
	6	834890.0	91.4	10	3	1538.0	1512.0	1624.0
	7	81085.0	78.3	10	2	1499.0	1657.0	—
	8	322112.0	88.0	10	3	1669.0	1863.0	1904.0
	9	563642.0	87.8	10	3	1965.0	1264.0	1647.0
	10	805457.0	91.8	10	3	1146.0	1694.0	1460.0
	11	51394.0	52.9	10	1	1422.0	—	—



Radar Type 6 - Radar Statistical Performance			
Trail #	1=Detection 0=No Detection	Trail #	1=Detection 0=No Detection
0	1	15	1
1	1	16	1
2	1	17	1
3	1	18	1
4	1	19	1
5	1	20	1
6	1	21	1
7	1	22	1
8	1	23	1
9	1	24	1
10	1	25	1
11	1	26	1
12	1	27	1
13	1	28	1
14	1	29	1
Detection Percentage (%)		100%	

Type 6 Radar Waveform_0					
Frequency List (MHz)	0	1	2	3	4
0	5599	5628	5545	5251	5267
5	5505	5516	5659	5535	5609
10	5439	5716	5523	5371	5420
15	5619	5503	5310	5351	5386
20	5639	5488	5511	5497	5724
25	5517	5694	5681	5472	5372
30	5538	5672	5717	5406	5658
35	5636	5541	5584	5317	5518
40	5320	5426	5254	5409	5531
45	5432	5388	5429	5260	5470
50	5450	5298	5307	5487	5284
55	5479	5621	5506	5690	5646
60	5410	5723	5391	5312	5708
65	5687	5451	5666	5604	5435
70	5662	5542	5476	5515	5671
75	5561	5338	5624	5282	5644
80	5504	5328	5318	5553	5399
85	5363	5589	5508	5326	5667
90	5374	5674	5269	5416	5430
95	5366	5425	5502	5294	5684
Type 6 Radar Waveform_1					
Frequency List (MHz)	0	1	2	3	4
0	5379	5392	5481	5315	5487
5	5644	5538	5259	5668	5267
10	5443	5703	5282	5621	5508
15	5271	5606	5258	5543	5297
20	5708	5429	5600	5470	5673
25	5720	5323	5715	5514	5358
30	5398	5491	5604	5700	5349
35	5337	5262	5328	5357	5403
40	5364	5494	5406	5363	5412
45	5471	5313	5523	5346	5626
50	5396	5688	5667	5575	5696
55	5661	5300	5432	5555	5692
60	5477	5513	5533	5647	5519
65	5343	5562	5287	5652	5453
70	5411	5511	5596	5658	5338
75	5594	5345	5641	5441	5407
80	5584	5388	5510	5518	5450
85	5611	5312	5493	5683	5679
90	5391	5254	5350	5314	5409
95	5469	5623	5500	5506	5532

Type 6 Radar Waveform_2						
Frequency List (MHz)	0	1	2	3	4	
0	5537	5631	5417	5476	5329	
5	5686	5463	5334	5356	5571	
10	5374	5492	5323	5341	5413	
15	5596	5301	5709	5303	5260	
20	5305	5399	5467	5592	5443	
25	5622	5525	5448	5524	5274	
30	5556	5722	5355	5530	5643	
35	5424	5364	5440	5705	5512	
40	5717	5671	5486	5302	5259	
45	5403	5292	5392	5554	5545	
50	5366	5313	5600	5327	5400	
55	5485	5511	5550	5380	5529	
60	5411	5362	5632	5332	5265	
65	5377	5387	5518	5520	5336	
70	5482	5683	5351	5613	5365	
75	5359	5638	5415	5680	5580	
80	5480	5716	5326	5633	5590	
85	5372	5375	5477	5505	5636	
90	5407	5426	5702	5386	5404	
95	5384	5607	5363	5499	5694	
Type 6 Radar Waveform_3						
Frequency List (MHz)	0	1	2	3	4	
0	5317	5492	5353	5637	5549	
5	5253	5485	5409	5519	5303	
10	5683	5281	5364	5536	5434	
15	5587	5428	5715	5348	5452	
20	5313	5468	5408	5681	5416	
25	5413	5474	5651	5628	5308	
30	5695	5611	5312	5270	5417	
35	5622	5503	5531	5501	5665	
40	5631	5510	5666	5402	5400	
45	5599	5372	5506	5419	5675	
50	5476	5451	5574	5334	5397	
55	5471	5483	5601	5559	5461	
60	5430	5322	5694	5441	5466	
65	5537	5431	5719	5561	5643	
70	5528	5624	5515	5529	5363	
75	5539	5352	5361	5711	5482	
80	5544	5568	5635	5356	5310	
85	5365	5411	5351	5455	5632	
90	5330	5505	5350	5422	5522	
95	5318	5585	5641	5690	5669	

Type 6 Radar Waveform_4

Frequency List (MHz)	0	1	2	3	4
0	5572	5256	5289	5323	5391
5	5295	5410	5484	5585	5510
10	5614	5545	5405	5455	5675
15	5555	5343	5393	5266	5699
20	5634	5349	5673	5389	5301
25	5326	5282	5257	5342	5262
30	5597	5269	5485	5569	5442
35	5642	5622	5297	5446	5274
40	5653	5397	5528	5352	5720
45	5564	5472	5465	5679	5502
50	5663	5632	5341	5659	5437
55	5316	5378	5477	5590	5595
60	5364	5526	5267	5412	5360
65	5380	5658	5300	5600	5707
70	5518	5717	5498	5321	5384
75	5515	5692	5522	5495	5708
80	5631	5551	5688	5682	5374
85	5514	5694	5409	5625	5596
90	5511	5665	5610	5434	5539
95	5419	5399	5483	5627	5303

Type 6 Radar Waveform_5

Frequency List (MHz)	0	1	2	3	4
0	5352	5495	5700	5484	5611
5	5434	5432	5559	5273	5717
10	5545	5431	5446	5451	5476
15	5288	5682	5341	5458	5707
20	5703	5387	5287	5362	5567
25	5275	5485	5361	5376	5304
30	5486	5701	5603	5343	5640
35	5684	5713	5568	5593	5556
40	5285	5357	5591	5407	5491
45	5457	5332	5328	5622	5525
50	5380	5553	5374	5358	5663
55	5372	5391	5506	5672	5448
60	5719	5309	5455	5561	5329
65	5694	5570	5627	5294	5693
70	5521	5702	5668	5504	5673
75	5299	5605	5397	5316	5532
80	5271	5688	5524	5609	5659
85	5460	5653	5348	5286	5614
90	5699	5492	5543	5474	5383
95	5478	5606	5406	5562	5308

Type 6 Radar Waveform_6						
Frequency List (MHz)	0	1	2	3	4	
0	5510	5259	5636	5645	5453	
5	5476	5357	5634	5436	5546	
10	5379	5695	5487	5549	5497	
15	5376	5334	5386	5650	5715	
20	5394	5328	5279	5335	5455	
25	5602	5688	5562	5410	5443	
30	5472	5658	5343	5495	5460	
35	5348	5426	5461	5271	5470	
40	5599	5440	5529	5550	5488	
45	5289	5312	5411	5583	5481	
50	5617	5482	5556	5604	5463	
55	5656	5607	5560	5723	5491	
60	5419	5373	5450	5254	5287	
65	5401	5384	5278	5255	5435	
70	5462	5430	5366	5679	5621	
75	5454	5669	5416	5637	5624	
80	5704	5654	5551	5449	5561	
85	5563	5591	5397	5326	5527	
90	5414	5643	5451	5620	5374	
95	5652	5573	5367	5509	5382	

Type 6 Radar Waveform_7						
Frequency List (MHz)	0	1	2	3	4	
0	5290	5498	5572	5331	5673	
5	5518	5379	5709	5599	5278	
10	5310	5484	5625	5269	5367	
15	5364	5652	5431	5723	5560	
20	5368	5308	5721	5454	5416	
25	5666	5444	5485	5361	5615	
30	5558	5280	5487	5517	5257	
35	5424	5384	5438	5620	5370	
40	5315	5693	5670	5494	5641	
45	5534	5504	5358	5655	5552	
50	5479	5273	5677	5314	5688	
55	5293	5405	5296	5594	5317	
60	5347	5585	5702	5669	5645	
65	5708	5535	5665	5624	5303	
70	5375	5509	5275	5635	5328	
75	5253	5705	5628	5442	5526	
80	5283	5305	5457	5492	5465	
85	5577	5366	5616	5626	5634	
90	5664	5687	5584	5448	5274	
95	5467	5612	5580	5353	5649	

Type 6 Radar Waveform_8

Frequency List (MHz)	0	1	2	3	4
0	5545	5262	5508	5395	5515
5	5560	5304	5309	5665	5485
10	5716	5273	5666	5464	5539
15	5455	5491	5658	5476	5559
20	5634	5629	5307	5360	5281
25	5609	5403	5619	5295	5478
30	5527	5250	5572	5298	5421
35	5529	5608	5528	5674	5374
40	5703	5308	5555	5482	5525
45	5650	5577	5699	5587	5294
50	5709	5336	5706	5641	5302
55	5398	5461	5631	5504	5507
60	5264	5534	5305	5426	5715
65	5293	5311	5651	5705	5477
70	5511	5607	5724	5627	5621
75	5334	5292	5418	5616	5580
80	5363	5486	5317	5505	5523
85	5494	5622	5420	5613	5419
90	5350	5661	5306	5632	5704
95	5516	5639	5432	5647	5349

Type 6 Radar Waveform_9

Frequency List (MHz)	0	1	2	3	4
0	5325	5501	5444	5556	5260
5	5699	5326	5384	5353	5314
10	5550	5537	5707	5659	5560
15	5543	5618	5286	5424	5276
20	5642	5320	5723	5449	5254
25	5497	5255	5347	5399	5512
30	5666	5711	5529	5416	5670
35	5298	5668	5421	5352	5309
40	5688	5311	5721	5479	5454
45	5630	5660	5640	5656	5585
50	5282	5503	5720	5649	5694
55	5710	5663	5470	5661	5258
60	5541	5336	5609	5600	5644
65	5687	5419	5301	5259	5252
70	5476	5500	5293	5447	5412
75	5464	5597	5473	5267	5481
80	5665	5520	5673	5397	5561
85	5383	5330	5703	5598	5471
90	5641	5310	5545	5328	5343
95	5591	5639	5594	5496	5316

Type 6 Radar Waveform_10

Frequency List (MHz)	0	1	2	3	4
0	5483	5265	5380	5717	5577
5	5266	5251	5459	5516	5521
10	5481	5326	5273	5379	5581
15	5631	5270	5389	5469	5468
20	5650	5664	5441	5702	5288
25	5679	5453	5503	5546	5708
30	5600	5486	5347	5496	5332
35	5315	5692	5505	5698	5527
40	5394	5659	5463	5573	5383
45	5610	5268	5718	5693	5446
50	5364	5688	5333	5539	5409
55	5523	5681	5317	5635	5606
60	5662	5367	5282	5335	5549
65	5680	5519	5689	5495	5373
70	5720	5352	5325	5476	5252
75	5319	5532	5607	5578	5512
80	5645	5253	5420	5393	5300
85	5403	5443	5522	5668	5424
90	5371	5636	5675	5658	5419
95	5263	5274	5497	5307	5321

Type 6 Radar Waveform_11

Frequency List (MHz)	0	1	2	3	4
0	5263	5504	5316	5403	5322
5	5308	5273	5534	5679	5253
10	5412	5687	5314	5477	5602
15	5719	5397	5492	5514	5282
20	5561	5555	5702	5530	5675
25	5651	5531	5656	5704	5580
30	5275	5489	5443	5371	5596
35	5471	5406	5488	5280	5709
40	5366	5574	5597	5703	5570
45	5690	5590	5351	5301	5271
50	5333	5715	5389	5384	5624
55	5511	5453	5493	5599	5342
60	5446	5325	5648	5494	5290
65	5633	5498	5716	5254	5581
70	5298	5445	5328	5355	5552
75	5452	5686	5288	5652	5559
80	5289	5304	5712	5417	5685
85	5300	5617	5536	5475	5619
90	5402	5326	5272	5612	5540
95	5528	5377	5329	5481	5438

Type 6 Radar Waveform_12

Frequency List (MHz)	0	1	2	3	4
0	5518	5268	5252	5564	5639
5	5350	5673	5512	5270	5557
10	5721	5476	5355	5672	5623
15	5710	5427	5595	5559	5474
20	5569	5624	5643	5522	5648
25	5442	5383	5384	5333	5614
30	5414	5475	5400	5586	5273
35	5514	5513	5594	5284	5433
40	5680	5657	5535	5468	5567
45	5619	5570	5434	5262	5702
50	5598	5591	5565	5435	5447
55	5455	5641	5314	5636	5526
60	5478	5490	5593	5326	5649
65	5359	5655	5561	5376	5576
70	5401	5428	5645	5635	5297
75	5321	5637	5541	5609	5560
80	5405	5678	5659	5466	5334
85	5501	5429	5392	5600	5491
90	5278	5646	5325	5540	5394
95	5465	5336	5652	5339	5304

Type 6 Radar Waveform_13

Frequency List (MHz)	0	1	2	3	4
0	5298	5507	5663	5250	5384
5	5489	5695	5587	5433	5289
10	5652	5265	5396	5392	5644
15	5323	5554	5601	5666	5577
20	5315	5584	5611	5621	5330
25	5332	5437	5551	5456	5364
30	5357	5704	5522	5334	5685
35	5586	5537	5616	5473	5708
40	5564	5451	5453	5517	5320
45	5280	5485	5467	5266	5486
50	5270	5302	5354	5401	5407
55	5455	5497	5607	5655	5538
60	5633	5514	5692	5657	5493
65	5691	5296	5646	5379	5686
70	5300	5458	5404	5604	5464
75	5618	5318	5719	5341	5565
80	5539	5411	5600	5581	5501
85	5429	5369	5383	5640	5420
90	5656	5284	5583	5682	5649
95	5439	5546	5709	5525	5399

Type 6 Radar Waveform_14

Frequency List (MHz)	0	1	2	3	4
0	5553	5271	5599	5411	5701
5	5531	5620	5662	5596	5496
10	5486	5529	5534	5587	5665
15	5681	5704	5552	5383	5488
20	5384	5525	5603	5594	5659
25	5315	5541	5585	5498	5253
30	5314	5444	5674	5629	5316
35	5301	5448	5361	5548	5455
40	5445	5376	5561	5380	5433
45	5600	5378	5333	5275	5721
50	5442	5537	5419	5471	5542
55	5355	5597	5652	5468	5261
60	5345	5483	5562	5340	5638
65	5630	5538	5657	5286	5461
70	5574	5563	5476	5440	5510
75	5473	5354	5254	5602	5408
80	5320	5581	5489	5621	5334
85	5434	5618	5346	5387	5617
90	5467	5283	5428	5494	5530
95	5607	5504	5260	5509	5517

Type 6 Radar Waveform_15

Frequency List (MHz)	0	1	2	3	4
0	5711	5510	5535	5572	5446
5	5573	5642	5262	5284	5325
10	5417	5318	5575	5307	5686
15	5499	5333	5332	5597	5496
20	5550	5563	5692	5567	5484
25	5608	5421	5267	5619	5637
30	5714	5271	5659	5448	5352
35	5358	5392	5719	5514	5462
40	5294	5528	5252	5616	5655
45	5309	5413	5683	5339	5386
50	5618	5588	5508	5568	5255
55	5312	5471	5342	5390	5525
60	5394	5641	5584	5391	5666
65	5338	5363	5452	5369	5561
70	5326	5259	5522	5445	5560
75	5653	5580	5250	5367	5378
80	5321	5665	5405	5612	5282
85	5677	5388	5564	5438	5511
90	5393	5554	5349	5295	5549
95	5505	5486	5555	5589	5721

Type 6 Radar Waveform_16

Frequency List (MHz)	0	1	2	3	4
0	5491	5274	5471	5636	5288
5	5615	5567	5337	5447	5532
10	5348	5679	5616	5405	5707
15	5490	5363	5435	5545	5292
20	5504	5619	5684	5540	5372
25	5460	5624	5371	5653	5603
30	5703	5399	5600	5647	5497
35	5483	5612	5667	5376	5608
40	5611	5665	5381	5652	5393
45	5291	5397	5439	5427	5473
50	5319	5639	5597	5592	5512
55	5346	5263	5502	5290	5313
60	5519	5675	5470	5701	5564
65	5627	5407	5340	5702	5645
70	5700	5641	5621	5355	5650
75	5710	5481	5317	5680	5699
80	5561	5477	5634	5485	5350
85	5305	5332	5387	5599	5433
90	5642	5676	5588	5706	5404
95	5559	5604	5595	5403	5365

Type 6 Radar Waveform_17

Frequency List (MHz)	0	1	2	3	4
0	5271	5513	5407	5322	5508
5	5279	5589	5412	5264	5657
10	5468	5600	5253	5578	5490
15	5538	5590	5484	5415	5310
20	5445	5298	5610	5638	5312
25	5352	5475	5687	5721	5660
30	5517	5374	5370	5636	5671
35	5408	5442	5387	5544	5694
40	5603	5524	5649	5545	5373
45	5455	5492	5314	5252	5495
50	5690	5686	5359	5534	5692
55	5487	5284	5648	5365	5533
60	5390	5573	5608	5289	5641
65	5380	5444	5693	5341	5664
70	5499	5440	5286	5325	5367
75	5542	5587	5512	5413	5302
80	5527	5625	5510	5393	5585
85	5456	5366	5405	5525	5491
90	5576	5659	5579	5398	5722
95	5476	5682	5670	5502	5656

Type 6 Radar Waveform_18						
Frequency List (MHz)	0	1	2	3	4	
0	5526	5277	5343	5483	5350	
5	5321	5514	5487	5676	5568	
10	5588	5257	5698	5320	5274	
15	5666	5617	5544	5635	5423	
20	5476	5290	5583	5261	5555	
25	5579	5721	5288	5478	5665	
30	5300	5287	5679	5595	5301	
35	5383	5399	5541	5289	5646	
40	5377	5353	5457	5416	5545	
45	5603	5671	5266	5397	5616	
50	5303	5722	5549	5407	5306	
55	5633	5680	5530	5365	5691	
60	5519	5431	5713	5677	5687	
65	5387	5327	5667	5348	5662	
70	5255	5413	5523	5531	5600	
75	5293	5338	5299	5380	5535	
80	5720	5475	5444	5358	5654	
85	5508	5559	5373	5525	5593	
90	5714	5563	5296	5701	5302	
95	5497	5499	5683	5567	5504	

Type 6 Radar Waveform_19						
Frequency List (MHz)	0	1	2	3	4	
0	5684	5613	5279	5644	5570	
5	5363	5536	5562	5364	5300	
10	5519	5521	5264	5515	5295	
15	5269	5647	5680	5490	5431	
20	5545	5424	5379	5556	5317	
25	5588	5283	5305	5280	5427	
30	5367	5574	5472	5388	5342	
35	5378	5475	5273	5690	5697	
40	5482	5479	5529	5643	5306	
45	5333	5540	5474	5501	5466	
50	5372	5486	5439	5625	5435	
55	5503	5597	5600	5604	5334	
60	5695	5402	5294	5614	5465	
65	5632	5662	5616	5422	5657	
70	5525	5459	5410	5292	5672	
75	5638	5358	5602	5468	5504	
80	5308	5710	5549	5405	5539	
85	5296	5442	5668	5319	5498	
90	5437	5343	5398	5606	5696	
95	5514	5593	5633	5634	5610	

Type 6 Radar Waveform_20					
Frequency List (MHz)	0	1	2	3	4
0	5464	5377	5690	5330	5412
5	5502	5461	5637	5527	5507
10	5353	5310	5305	5710	5316
15	5270	5396	5275	5628	5682
20	5342	5711	5365	5371	5529
25	5680	5537	5389	5409	5314
30	5469	5531	5687	5452	5683
35	5481	5368	5523	5701	5536
40	5565	5417	5294	5640	5691
45	5623	5532	5554	5256	5355
50	5548	5575	5262	5569	5457
55	5419	5463	5385	5347	5601
60	5440	5508	5455	5611	5652
65	5254	5706	5295	5424	5614
70	5317	5571	5588	5699	5485
75	5723	5293	5259	5668	5636
80	5558	5629	5308	5449	5379
85	5672	5386	5520	5530	5515
90	5268	5724	5349	5567	5562
95	5526	5692	5395	5356	5487

Type 6 Radar Waveform_21					
Frequency List (MHz)	0	1	2	3	4
0	5719	5616	5626	5491	5632
5	5544	5483	5712	5593	5714
10	5284	5671	5346	5333	5337
15	5358	5426	5378	5673	5399
20	5350	5305	5403	5460	5502
25	5471	5389	5592	5513	5348
30	5511	5717	5488	5330	5701
35	5406	5620	5560	5639	5676
40	5615	5375	5270	5355	5437
45	5259	5542	5706	5493	5607
50	5618	5609	5724	5419	5664
55	5416	5336	5411	5405	5546
60	5550	5292	5433	5363	5454
65	5656	5688	5464	5344	5509
70	5700	5382	5395	5273	5276
75	5443	5708	5563	5715	5586
80	5258	5287	5668	5571	5478
85	5521	5651	5530	5492	5551
90	5526	5564	5300	5280	5266
95	5404	5612	5465	5541	5629

Type 6 Radar Waveform_22

Frequency List (MHz)	0	1	2	3	4
0	5499	5380	5562	5652	5474
5	5586	5408	5312	5281	5543
10	5593	5460	5484	5528	5358
15	5446	5553	5481	5718	5591
20	5471	5344	5549	5475	5359
25	5716	5320	5617	5382	5650
30	5606	5445	5545	5378	5701
35	5662	5651	5435	5354	5529
40	5311	5353	5671	5677	5256
45	5314	5551	5660	5485	5425
50	5470	5375	5286	5360	5427
55	5365	5595	5420	5721	5715
60	5334	5265	5664	5400	5509
65	5627	5296	5614	5297	5368
70	5398	5597	5469	5710	5412
75	5413	5544	5492	5468	5367
80	5422	5350	5665	5649	5417
85	5441	5616	5454	5303	5690
90	5532	5501	5657	5389	5283
95	5459	5596	5363	5423	5257

Type 6 Radar Waveform_23

Frequency List (MHz)	0	1	2	3	4
0	5279	5619	5498	5716	5694
5	5628	5430	5387	5444	5275
10	5524	5724	5525	5723	5379
15	5534	5680	5487	5288	5308
20	5269	5540	5285	5541	5448
25	5625	5665	5523	5343	5416
30	5692	5592	5402	5627	5521
35	5326	5364	5328	5507	5436
40	5609	5442	5253	5303	5631
45	5397	5713	5295	5361	5601
50	5464	5584	5682	5615	5319
55	5310	5254	5391	5278	5405
60	5572	5490	5443	5458	5663
65	5506	5590	5466	5451	5401
70	5446	5445	5669	5284	5376
75	5459	5481	5623	5489	5510
80	5662	5369	5474	5259	5544
85	5536	5484	5408	5551	5406
90	5635	5535	5539	5300	5514
95	5677	5261	5360	5433	5583

Type 6 Radar Waveform_24					
Frequency List (MHz)	0	1	2	3	4
0	5437	5383	5434	5402	5439
5	5292	5355	5462	5607	5482
10	5455	5513	5566	5443	5400
15	5525	5332	5590	5711	5500
20	5277	5706	5323	5630	5421
25	5517	5251	5447	5450	5259
30	5481	5359	5304	5719	5465
35	5599	5282	5454	5464	5519
40	5547	5682	5250	5707	5611
45	5480	5667	5291	5560	5712
50	5302	5572	5553	5407	5626
55	5328	5273	5451	5362	5570
60	5699	5501	5413	5389	5406
65	5338	5301	5393	5538	5673
70	5628	5253	5496	5602	5506
75	5521	5591	5404	5653	5573
80	5659	5564	5377	5576	5507
85	5449	5459	5324	5708	5571
90	5641	5472	5510	5414	5569
95	5661	5256	5284	5463	5631

Type 6 Radar Waveform_25					
Frequency List (MHz)	0	1	2	3	4
0	5692	5622	5370	5563	5281
5	5334	5377	5537	5673	5311
10	5289	5302	5607	5638	5421
15	5613	5459	5693	5285	5300
20	5264	5394	5401	5466	5357
25	5551	5484	5398	5316	5618
30	5553	5539	5604	5546	5395
35	5435	5368	5303	5699	5485
40	5350	5722	5636	5591	5628
45	5447	5491	5478	5623	5642
50	5705	5473	5516	5702	5690
55	5270	5333	5536	5260	5644
60	5714	5335	5704	5356	5548
65	5571	5671	5707	5423	5504
70	5522	5397	5587	5600	5616
75	5648	5487	5676	5701	5660
80	5342	5656	5381	5280	5515
85	5567	5445	5317	5413	5572
90	5431	5261	5647	5506	5681
95	5619	5624	5645	5629	5263

Type 6 Radar Waveform_26

Frequency List (MHz)	0	1	2	3	4
0	5472	5386	5306	5724	5501
5	5376	5399	5612	5361	5518
10	5695	5663	5648	5261	5442
15	5701	5489	5321	5326	5409
20	5671	5466	5680	5711	5367
25	5667	5318	5560	5655	5440
30	5356	5273	5358	5705	5262
35	5646	5637	5666	5588	5379
40	5714	5307	5423	5590	5341
45	5468	5474	5686	5300	5712
50	5654	5674	5256	5431	5417
55	5704	5656	5405	5564	5682
60	5665	5425	5640	5540	5281
65	5430	5305	5380	5463	5377
70	5304	5506	5604	5371	5373
75	5449	5569	5316	5453	5441
80	5699	5556	5576	5280	5357
85	5530	5282	5345	5251	5426
90	5653	5443	5631	5448	5679
95	5527	5620	5572	5649	5296

Type 6 Radar Waveform_27

Frequency List (MHz)	0	1	2	3	4
0	5252	5625	5717	5410	5343
5	5418	5324	5687	5524	5250
10	5626	5452	5689	5456	5463
15	5314	5616	5424	5274	5698
20	5679	5535	5621	5703	5340
25	5555	5645	5288	5381	5552
30	5482	5720	5705	5573	5479
35	5557	5310	5253	5559	5363
40	5293	5553	5390	5361	5355
45	5338	5397	5454	5254	5269
50	5353	5599	5718	5442	5264
55	5417	5610	5498	5383	5653
60	5319	5590	5631	5472	5613
65	5258	5655	5473	5492	5607
70	5695	5408	5538	5284	5362
75	5449	5349	5697	5384	5296
80	5658	5257	5593	5591	5281
85	5477	5348	5265	5465	5259
90	5710	5425	5675	5372	5391
95	5415	5307	5541	5595	5532

Type 6 Radar Waveform_28

Frequency List (MHz)	0	1	2	3	4
0	5410	5389	5653	5571	5563
5	5557	5346	5287	5687	5554
10	5460	5716	5255	5651	5484
15	5305	5268	5430	5319	5415
20	5701	5659	5317	5313	5594
25	5491	5485	5586	5621	5706
30	5662	5631	5280	5449	5441
35	5355	5516	5682	5392	5473
40	5299	5498	5335	5704	5434
45	5337	5705	5406	5531	5301
50	5552	5683	5605	5564	5688
55	5580	5624	5448	5576	5401
60	5289	5270	5454	5678	5649
65	5422	5625	5458	5545	5478
70	5707	5544	5703	5367	5404
75	5505	5482	5459	5262	5447
80	5550	5658	5613	5553	5352
85	5590	5372	5366	5269	5281
90	5511	5374	5314	5694	5323
95	5481	5303	5667	5486	5627

Type 6 Radar Waveform_29

Frequency List (MHz)	0	1	2	3	4
0	5665	5628	5589	5257	5405
5	5599	5271	5362	5278	5286
10	5391	5505	5296	5371	5393
15	5395	5533	5364	5607	5598
20	5392	5600	5309	5709	5446
25	5694	5620	5663	5595	5619
30	5431	5575	5491	5532	5626
35	5669	5693	5706	5653	5712
40	5263	5332	5633	5414	5420
45	5288	5459	5276	5373	5707
50	5352	5375	5530	5696	5518
55	5403	5399	5480	5445	5521
60	5708	5687	5691	5655	5627
65	5685	5632	5261	5714	5464
70	5710	5679	5326	5379	5524
75	5648	5411	5259	5472	5426
80	5510	5547	5686	5561	5455
85	5613	5544	5458	5423	5517
90	5467	5293	5448	5490	5386
95	5596	5369	5300	5460	5406



Test Site	WJ-SR8	Test Engineer	Jake Lan
Test Date	2026-02-08		
Test Item	Radar Statistical Performance Check (802.11be-EHT80 - 5530 MHz)		

Radar Type 1-4 - Radar Statistical Performance								
Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect
0	5509	1	5537	1	5502	1	5533	1
1	5493	1	5514	1	5570	1	5500	1
2	5560	1	5490	1	5500	1	5530	1
3	5503	1	5530	0	5530	0	5523	0
4	5539	1	5543	1	5494	0	5516	1
5	5527	1	5570	0	5528	1	5536	1
6	5570	1	5498	0	5536	1	5570	0
7	5562	1	5567	1	5510	0	5528	0
8	5512	1	5506	1	5516	1	5541	1
9	5553	1	5505	0	5535	1	5502	1
10	5498	1	5556	1	5501	1	5532	1
11	5550	1	5510	1	5562	1	5526	1
12	5490	1	5566	1	5496	1	5551	1
13	5525	1	5497	0	5523	1	5511	1
14	5504	1	5502	0	5560	0	5520	1
15	5530	1	5560	1	5490	0	5559	1
16	5510	1	5565	1	5492	1	5490	1
17	5499	1	5525	1	5508	0	5521	1
18	5502	1	5550	1	5509	1	5540	1
19	5543	1	5526	1	5545	1	5510	0
20	5533	1	5527	1	5505	1	5569	0
21	5519	1	5562	1	5538	0	5543	1
22	5520	1	5547	0	5491	1	5568	1
23	5518	1	5540	0	5540	0	5527	1
24	5491	1	5511	1	5520	1	5509	1
25	5532	1	5492	1	5499	1	5498	1
26	5521	1	5499	1	5544	1	5515	0
27	5505	1	5523	1	5549	1	5525	1



Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency	1=detect	Frequency	1=detect	Frequency	1=detect	Frequency	1=detect
	(MHz)	0=no detect	(MHz)	0=no detect	(MHz)	0=no detect	(MHz)	0=no detect
28	5547	1	5520	1	5515	1	5504	0
29	5494	1	5491	1	5507	1	5507	1
Probability:	100.0%		73.3%		73.3%		76.7%	
Aggregate:	80.8% (>80%)							

Radar Type 1 - Radar Waveform							Radar Type 2 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 1	1.0	738.0	72	53136.0	Download	0	Type 2	1.4	159.0	23	3657.0
Download	1	Type 1	1.0	618.0	86	53148.0	Download	1	Type 2	4.8	230.0	29	6670.0
Download	2	Type 1	1.0	578.0	92	53176.0	Download	2	Type 2	3.1	206.0	26	5356.0
Download	3	Type 1	1.0	558.0	95	53010.0	Download	3	Type 2	1.3	170.0	23	3910.0
Download	4	Type 1	1.0	718.0	74	53132.0	Download	4	Type 2	1.1	188.0	23	4324.0
Download	5	Type 1	1.0	858.0	62	53196.0	Download	5	Type 2	2.9	228.0	26	5928.0
Download	6	Type 1	1.0	778.0	68	52904.0	Download	6	Type 2	1.6	173.0	24	4152.0
Download	7	Type 1	1.0	3066.0	18	55188.0	Download	7	Type 2	1.7	205.0	24	4920.0
Download	8	Type 1	1.0	698.0	76	53048.0	Download	8	Type 2	4.6	184.0	29	5336.0
Download	9	Type 1	1.0	798.0	67	53466.0	Download	9	Type 2	4.3	195.0	28	5460.0
Download	10	Type 1	1.0	838.0	63	52794.0	Download	10	Type 2	2.4	156.0	25	3900.0
Download	11	Type 1	1.0	538.0	99	53262.0	Download	11	Type 2	1.6	175.0	24	4200.0
Download	12	Type 1	1.0	918.0	58	53244.0	Download	12	Type 2	1.0	202.0	23	4646.0
Download	13	Type 1	1.0	658.0	81	53298.0	Download	13	Type 2	4.9	199.0	29	5771.0
Download	14	Type 1	1.0	898.0	59	52982.0	Download	14	Type 2	1.1	161.0	23	3703.0
Download	15	Type 1	1.0	2644.0	20	52880.0	Download	15	Type 2	3.1	177.0	26	4602.0
Download	16	Type 1	1.0	1914.0	28	53592.0	Download	16	Type 2	1.8	180.0	24	4320.0
Download	17	Type 1	1.0	1396.0	38	53048.0	Download	17	Type 2	2.8	225.0	26	5850.0
Download	18	Type 1	1.0	819.0	65	53235.0	Download	18	Type 2	4.1	169.0	28	4732.0
Download	19	Type 1	1.0	3042.0	18	54756.0	Download	19	Type 2	2.8	182.0	26	4732.0
Download	20	Type 1	1.0	705.0	75	52875.0	Download	20	Type 2	4.8	152.0	29	4408.0
Download	21	Type 1	1.0	3061.0	18	55098.0	Download	21	Type 2	4.6	201.0	29	5829.0
Download	22	Type 1	1.0	664.0	80	53120.0	Download	22	Type 2	2.1	191.0	24	4584.0
Download	23	Type 1	1.0	1193.0	45	53685.0	Download	23	Type 2	3.9	153.0	27	4131.0
Download	24	Type 1	1.0	1526.0	35	53410.0	Download	24	Type 2	2.4	176.0	25	4400.0
Download	25	Type 1	1.0	1785.0	30	53550.0	Download	25	Type 2	4.6	223.0	29	6467.0
Download	26	Type 1	1.0	569.0	93	52917.0	Download	26	Type 2	1.0	197.0	23	4531.0
Download	27	Type 1	1.0	1658.0	32	53056.0	Download	27	Type 2	3.5	171.0	27	4617.0
Download	28	Type 1	1.0	2942.0	18	52956.0	Download	28	Type 2	4.0	154.0	28	4312.0
Download	29	Type 1	1.0	1295.0	41	53095.0	Download	29	Type 2	3.5	189.0	27	5103.0



Radar Type 3 - Radar Waveform							Radar Type 4 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 3	6.4	266.0	16	4256.0	Download	0	Type 4	12.0	266.0	12	3192.0
Download	1	Type 3	9.8	306.0	18	5508.0	Download	1	Type 4	19.5	306.0	16	4896.0
Download	2	Type 3	8.1	385.0	17	6545.0	Download	2	Type 4	15.7	385.0	14	5390.0
Download	3	Type 3	6.3	203.0	16	3248.0	Download	3	Type 4	11.7	203.0	12	2436.0
Download	4	Type 3	6.1	316.0	16	5056.0	Download	4	Type 4	11.3	316.0	12	3792.0
Download	5	Type 3	7.9	227.0	17	3859.0	Download	5	Type 4	15.2	227.0	14	3178.0
Download	6	Type 3	6.6	435.0	16	6960.0	Download	6	Type 4	12.5	435.0	12	5220.0
Download	7	Type 3	6.7	202.0	16	3232.0	Download	7	Type 4	12.7	202.0	12	2424.0
Download	8	Type 3	9.6	421.0	18	7578.0	Download	8	Type 4	19.1	421.0	16	6736.0
Download	9	Type 3	9.3	248.0	18	4464.0	Download	9	Type 4	18.4	248.0	16	3968.0
Download	10	Type 3	7.4	200.0	17	3400.0	Download	10	Type 4	14.2	200.0	13	2600.0
Download	11	Type 3	6.6	496.0	16	7936.0	Download	11	Type 4	12.4	496.0	12	5952.0
Download	12	Type 3	6.0	267.0	16	4272.0	Download	12	Type 4	11.0	267.0	12	3204.0
Download	13	Type 3	9.9	403.0	18	7254.0	Download	13	Type 4	19.8	403.0	16	6448.0
Download	14	Type 3	6.1	236.0	16	3776.0	Download	14	Type 4	11.4	236.0	12	2832.0
Download	15	Type 3	8.1	424.0	17	7208.0	Download	15	Type 4	15.7	424.0	14	5936.0
Download	16	Type 3	6.8	271.0	16	4336.0	Download	16	Type 4	12.8	271.0	13	3523.0
Download	17	Type 3	7.8	367.0	17	6239.0	Download	17	Type 4	15.1	367.0	14	5138.0
Download	18	Type 3	9.1	492.0	18	8856.0	Download	18	Type 4	17.9	492.0	15	7380.0
Download	19	Type 3	7.8	414.0	17	7038.0	Download	19	Type 4	15.1	414.0	14	5796.0
Download	20	Type 3	9.8	262.0	18	4716.0	Download	20	Type 4	19.4	262.0	16	4192.0
Download	21	Type 3	9.6	461.0	18	8298.0	Download	21	Type 4	19.0	461.0	16	7376.0
Download	22	Type 3	7.1	305.0	16	4880.0	Download	22	Type 4	13.5	305.0	13	3965.0
Download	23	Type 3	8.9	462.0	18	8316.0	Download	23	Type 4	17.4	462.0	15	6930.0
Download	24	Type 3	7.4	468.0	17	7956.0	Download	24	Type 4	14.1	468.0	13	6084.0
Download	25	Type 3	9.6	208.0	18	3744.0	Download	25	Type 4	19.0	208.0	16	3328.0
Download	26	Type 3	6.0	213.0	16	3408.0	Download	26	Type 4	11.0	213.0	12	2556.0
Download	27	Type 3	8.5	479.0	17	8143.0	Download	27	Type 4	16.6	479.0	15	7185.0
Download	28	Type 3	9.0	485.0	18	8730.0	Download	28	Type 4	17.7	485.0	15	7275.0
Download	29	Type 3	8.5	333.0	17	5661.0	Download	29	Type 4	16.6	333.0	15	4995.0



Radar Type 5 - Radar Statistical Performance					
Trail #	Test Freq. (MHz)	1=Detection 0=No Detection	Trail #	Test Freq. (MHz)	1=Detection 0=No Detection
0	5530	1	15	5495.2	1
1	5530	1	16	5493.2	1
2	5530	1	17	5494.8	1
3	5530	1	18	5496.8	1
4	5530	1	19	5494.8	1
5	5530	1	20	5562.4	1
6	5530	1	21	5562.4	1
7	5530	1	22	5566.4	1
8	5530	1	23	5563.6	1
9	5530	1	24	5566	1
10	5494	1	25	5562.4	1
11	5492.8	1	26	5568	1
12	5492	1	27	5564	1
13	5498	1	28	5563.6	1
14	5492	1	29	5564	1
Detection Percentage (%)			100.0%		

Type 5 Radar Waveform_0								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	481774.0	55.9	6	1	1432.0	—	—	
1	802937.0	97.3	6	3	1482.0	1371.0	1665.0	
2	1126420.0	76.0	6	2	1698.0	1399.0	—	
3	118988.0	53.8	6	1	1077.0	—	—	
4	442045.0	51.8	6	1	1250.0	—	—	
5	764079.0	73.2	6	2	1073.0	1984.0	—	
6	1087629.0	58.2	6	1	1936.0	—	—	
7	79158.0	59.3	6	1	1574.0	—	—	
8	401434.0	94.6	6	3	1655.0	1265.0	1032.0	
Type 5 Radar Waveform_1								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	324411.0	91.0	20	3	1636.0	1483.0	1087.0	
1	469741.0	67.7	20	2	1490.0	1660.0	—	
2	17686.0	57.9	20	1	1778.0	—	—	
3	162837.0	50.2	20	1	1545.0	—	—	
4	306616.0	98.5	20	3	1440.0	1266.0	1492.0	
5	453371.0	52.2	20	1	1221.0	—	—	
6	596421.0	75.8	20	2	1777.0	1617.0	—	
7	144935.0	60.0	20	1	1643.0	—	—	
8	289653.0	72.7	20	2	1287.0	1186.0	—	
9	433313.0	88.1	20	3	1463.0	1735.0	1006.0	
10	579375.0	72.9	20	2	1031.0	1562.0	—	
11	126499.0	96.7	20	3	1716.0	1123.0	1447.0	
12	271115.0	94.1	20	3	1015.0	1569.0	1400.0	
13	417205.0	63.8	20	1	1780.0	—	—	
14	559756.0	85.6	20	3	1341.0	1532.0	1605.0	
15	108889.0	67.1	20	2	1893.0	1366.0	—	
16	253395.0	94.5	20	3	1345.0	1237.0	1202.0	
17	399761.0	50.0	20	1	1140.0	—	—	
18	543977.0	81.3	20	2	1083.0	1184.0	—	
19	90905.0	87.0	20	3	1652.0	1459.0	1178.0	
Type 5 Radar Waveform_2								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	337323.0	81.3	13	2	1555.0	1888.0	—	
1	545609.0	65.0	13	1	1502.0	—	—	
2	751153.0	78.7	13	2	1902.0	1845.0	—	
3	104981.0	66.4	13	1	1722.0	—	—	
4	311851.0	70.4	13	2	1804.0	1552.0	—	
5	519970.0	54.8	13	1	1630.0	—	—	
6	726323.0	76.6	13	2	1705.0	1261.0	—	
7	79475.0	61.0	13	1	1197.0	—	—	
8	286261.0	91.0	13	3	1098.0	1384.0	1124.0	
9	493717.0	81.1	13	2	1119.0	1714.0	—	
10	700457.0	92.0	13	3	1133.0	1245.0	1012.0	
11	53660.0	92.2	13	3	1752.0	1369.0	1944.0	
12	261330.0	52.7	13	1	1747.0	—	—	
13	466751.0	89.6	13	3	1986.0	1576.0	1905.0	

Type 5 Radar Waveform_3								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	1053244.0	56.0	6	1	1075.0	—	—	
1	44010.0	85.7	6	3	1381.0	1103.0	1304.0	
2	366173.0	84.4	6	3	1161.0	1768.0	1922.0	
3	688471.0	92.6	6	3	1810.0	1058.0	1792.0	
4	1011819.0	67.0	6	2	1233.0	1977.0	—	
5	4292.0	68.6	6	2	1441.0	1841.0	—	
6	327032.0	70.1	6	2	1337.0	1293.0	—	
7	650174.0	63.8	6	1	1802.0	—	—	
8	972424.0	75.1	6	2	1042.0	1701.0	—	
Type 5 Radar Waveform_4								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	1457260.0	69.4	5	2	1313.0	1533.0	—	
1	323546.0	52.8	5	1	1298.0	—	—	
2	687023.0	55.0	5	1	1310.0	—	—	
3	1050106.0	61.8	5	1	1876.0	—	—	
4	1410235.0	83.5	5	3	1935.0	1386.0	1960.0	
5	278127.0	90.4	5	3	1738.0	1228.0	1808.0	
6	640686.0	86.8	5	3	1324.0	1677.0	1959.0	
7	1005914.0	57.3	5	1	1036.0	—	—	
Type 5 Radar Waveform_5								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	780805.0	73.2	12	2	1165.0	1336.0	—	
1	133350.0	77.0	12	2	1871.0	1204.0	—	
2	340330.0	72.4	12	2	1564.0	1909.0	—	
3	548738.0	63.3	12	1	1343.0	—	—	
4	755214.0	75.9	12	2	1037.0	1530.0	—	
5	107580.0	89.0	12	3	1860.0	1707.0	1534.0	
6	314461.0	91.6	12	3	1850.0	1358.0	1259.0	
7	521872.0	79.9	12	2	1853.0	1616.0	—	
8	727663.0	93.6	12	3	1335.0	1635.0	1964.0	
9	82301.0	75.6	12	2	1712.0	1575.0	—	
10	290050.0	64.8	12	1	1333.0	—	—	
11	496909.0	69.1	12	2	1422.0	1117.0	—	
12	702929.0	91.7	12	3	1164.0	1633.0	1257.0	
13	56681.0	96.2	12	3	1890.0	1961.0	1109.0	
Type 5 Radar Waveform_6								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	370138.0	80.8	7	2	1222.0	1091.0	—	
1	659185.0	93.9	7	3	1957.0	1090.0	1858.0	
2	951854.0	54.5	7	1	1353.0	—	—	
3	43906.0	57.7	7	1	1646.0	—	—	
4	333525.0	100.0	7	3	1554.0	1949.0	1793.0	
5	624452.0	82.7	7	2	1476.0	1572.0	—	
6	915586.0	51.8	7	1	1953.0	—	—	
7	8100.0	83.1	7	2	1185.0	1254.0	—	
8	298783.0	62.6	7	1	1489.0	—	—	
9	588545.0	66.8	7	2	1495.0	1854.0	—	

Type 5 Radar Waveform_7

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	878644.0	67.4	7	2	1587.0	1934.0	-
1	1167579.0	90.0	7	3	1700.0	1619.0	1480.0
2	262987.0	59.3	7	1	1450.0	-	-
3	553627.0	63.6	7	1	1549.0	-	-
4	844413.0	65.3	7	1	1374.0	-	-
5	1132339.0	93.1	7	3	1159.0	1881.0	1267.0
6	226451.0	93.2	7	3	1557.0	1779.0	1966.0
7	517119.0	70.6	7	2	1864.0	1319.0	-
8	808843.0	54.1	7	1	1021.0	-	-
9	1097148.0	73.7	7	2	1884.0	1847.0	-

Type 5 Radar Waveform_8

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	100461.0	68.7	19	2	1325.0	1086.0	-
1	253382.0	65.1	19	1	1596.0	-	-
2	405021.0	80.3	19	2	1623.0	1759.0	-
3	558027.0	76.2	19	2	1176.0	1475.0	-
4	81485.0	80.2	19	2	1926.0	1875.0	-
5	233749.0	96.7	19	3	1196.0	1005.0	1577.0
6	385512.0	92.9	19	3	1887.0	1305.0	1396.0
7	540329.0	62.7	19	1	1379.0	-	-
8	62879.0	73.4	19	2	1025.0	1290.0	-
9	214654.0	93.1	19	3	1788.0	1566.0	1417.0
10	368707.0	55.3	19	1	1297.0	-	-
11	518655.0	94.8	19	3	1988.0	1057.0	1774.0
12	43888.0	83.5	19	3	1800.0	1378.0	1870.0
13	196396.0	73.2	19	2	1511.0	1763.0	-
14	348802.0	72.0	19	2	1695.0	1540.0	-
15	502187.0	61.1	19	1	1991.0	-	-
16	25333.0	57.3	19	1	1016.0	-	-
17	177564.0	75.7	19	2	1496.0	1999.0	-
18	329429.0	90.5	19	3	1046.0	1795.0	1539.0

Type 5 Radar Waveform_9

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	510351.0	54.1	18	1	1948.0	-	-
1	6856.0	55.5	18	1	1061.0	-	-
2	167469.0	90.2	18	3	1923.0	1137.0	1236.0
3	329704.0	64.4	18	1	1088.0	-	-
4	491050.0	55.6	18	1	1193.0	-	-
5	649011.0	96.0	18	3	1761.0	1069.0	1869.0
6	147720.0	86.0	18	3	1720.0	1328.0	1071.0
7	308770.0	79.6	18	2	1544.0	1799.0	-
8	469758.0	77.9	18	2	1595.0	1592.0	-
9	632497.0	64.5	18	1	1268.0	-	-
10	128348.0	50.5	18	1	1939.0	-	-
11	289039.0	82.4	18	2	1723.0	1425.0	-
12	448793.0	94.3	18	3	1897.0	1803.0	1174.0
13	612642.0	64.9	18	1	1242.0	-	-
14	108277.0	67.9	18	2	1264.0	1981.0	-
15	269393.0	77.4	18	2	1514.0	1200.0	-
16	430953.0	65.6	18	1	1896.0	-	-
17	592703.0	63.6	18	1	1309.0	-	-

Type 5 Radar Waveform_10								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	132936.0	78.4	10	2	1423.0	1570.0	-	
1	374664.0	77.6	10	2	1879.0	1321.0	-	
2	617516.0	53.2	10	1	1426.0	-	-	
3	857023.0	89.9	10	3	1822.0	1663.0	1052.0	
4	102945.0	89.1	10	3	1474.0	1739.0	1769.0	
5	345419.0	59.6	10	1	1657.0	-	-	
6	586781.0	69.6	10	2	1456.0	1504.0	-	
7	829999.0	61.4	10	1	1271.0	-	-	
8	73376.0	72.7	10	2	1262.0	1593.0	-	
9	315614.0	56.4	10	1	1594.0	-	-	
10	556237.0	86.1	10	3	1392.0	1840.0	1085.0	
11	797932.0	91.6	10	3	1247.0	1741.0	1067.0	

Type 5 Radar Waveform_11								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	52371.0	54.1	7	1	1894.0	-	-	
1	342278.0	85.7	7	3	1142.0	1812.0	1286.0	
2	632867.0	67.5	7	2	1169.0	1976.0	-	
3	923084.0	80.1	7	2	1395.0	1826.0	-	
4	16588.0	50.0	7	1	1234.0	-	-	
5	306759.0	68.2	7	2	1866.0	1582.0	-	
6	597357.0	78.6	7	2	1437.0	1217.0	-	
7	888435.0	50.7	7	1	1730.0	-	-	
8	1178488.0	74.7	7	2	1243.0	1062.0	-	
9	271237.0	80.3	7	2	1276.0	1182.0	-	

Type 5 Radar Waveform_12								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	701543.0	94.2	5	3	1970.0	1251.0	1035.0	
1	1065295.0	67.1	5	2	1794.0	1074.0	-	
2	1430102.0	64.9	5	1	1081.0	-	-	
3	294027.0	98.3	5	3	1849.0	1413.0	1332.0	
4	657714.0	72.8	5	2	1180.0	1129.0	-	
5	1021195.0	60.6	5	1	1951.0	-	-	
6	1384529.0	61.0	5	1	1940.0	-	-	
7	249665.0	79.8	5	2	1362.0	1360.0	-	

Type 5 Radar Waveform_13

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	244824.0	65.6	20	1	1814.0	—	—
1	388395.0	95.9	20	3	1063.0	1403.0	1662.0
2	535441.0	56.4	20	1	1301.0	—	—
3	81531.0	97.6	20	3	1471.0	1536.0	1318.0
4	226516.0	78.9	20	2	1171.0	1798.0	—
5	370293.0	98.2	20	3	1521.0	1834.0	1256.0
6	514689.0	87.3	20	3	1524.0	1640.0	1453.0
7	64037.0	64.2	20	1	1510.0	—	—
8	209204.0	66.4	20	1	1469.0	—	—
9	353825.0	80.5	20	2	1270.0	1114.0	—
10	496858.0	94.8	20	3	1863.0	1439.0	1368.0
11	45965.0	94.2	20	3	1414.0	1522.0	1070.0
12	190844.0	73.2	20	2	1772.0	1195.0	—
13	335540.0	79.5	20	2	1252.0	1899.0	—
14	479147.0	93.5	20	3	1649.0	1306.0	1622.0
15	28116.0	86.4	20	3	1734.0	1771.0	1430.0
16	173474.0	60.3	20	1	1359.0	—	—
17	318803.0	64.8	20	1	1097.0	—	—
18	463376.0	64.9	20	1	1975.0	—	—
19	10397.0	64.2	20	1	1614.0	—	—

Type 5 Radar Waveform_14

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	389582.0	64.9	5	1	1066.0	—	—
1	751280.0	99.7	5	3	1146.0	1770.0	1813.0
2	1113671.0	98.9	5	3	1965.0	1209.0	1903.0
3	1479561.0	64.8	5	1	1710.0	—	—
4	343936.0	89.0	5	3	1683.0	1728.0	1420.0
5	706455.0	98.1	5	3	1989.0	1454.0	1613.0
6	1069256.0	83.4	5	3	1416.0	1721.0	1598.0
7	1432714.0	86.2	5	3	1044.0	1767.0	1079.0

Type 5 Radar Waveform_15

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	171100.0	75.0	13	2	1235.0	1078.0	—
1	377393.0	90.9	13	3	1994.0	1156.0	1491.0
2	584235.0	86.9	13	3	1512.0	1809.0	1198.0
3	794248.0	59.0	13	1	1043.0	—	—
4	145659.0	50.3	13	1	1748.0	—	—
5	352120.0	92.9	13	3	1141.0	1835.0	1192.0
6	559034.0	90.9	13	3	1363.0	1639.0	1105.0
7	765644.0	90.3	13	3	1817.0	1535.0	1064.0
8	119654.0	85.1	13	3	1383.0	1620.0	1955.0
9	327681.0	56.6	13	1	1444.0	—	—
10	535075.0	56.8	13	1	1668.0	—	—
11	741095.0	69.3	13	2	1656.0	1694.0	—
12	94272.0	92.8	13	3	1199.0	1751.0	1314.0
13	301305.0	85.8	13	3	1208.0	1327.0	1211.0

Type 5 Radar Waveform_16								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	713667.0	51.8	8	1	1762.0	—	—	
1	1001596.0	98.1	8	3	1670.0	1464.0	1828.0	
2	96633.0	55.9	8	1	1971.0	—	—	
3	386719.0	80.5	8	2	1740.0	1697.0	—	
4	678240.0	57.0	8	1	1108.0	—	—	
5	968740.0	64.7	8	1	1442.0	—	—	
6	60815.0	73.6	8	2	1258.0	1246.0	—	
7	350886.0	78.5	8	2	1867.0	1862.0	—	
8	640251.0	87.9	8	3	1855.0	1744.0	1565.0	
9	932747.0	57.9	8	1	1681.0	—	—	
Type 5 Radar Waveform_17								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	19214.0	95.7	12	3	1349.0	1028.0	1874.0	
1	242108.0	96.9	12	3	1609.0	1322.0	1131.0	
2	466398.0	64.8	12	1	1295.0	—	—	
3	689974.0	65.9	12	1	1275.0	—	—	
4	910913.0	97.1	12	3	1499.0	1323.0	1104.0	
5	214498.0	91.7	12	3	1407.0	1438.0	1880.0	
6	438646.0	58.6	12	1	1745.0	—	—	
7	661021.0	80.9	12	2	1487.0	1756.0	—	
8	885319.0	64.8	12	1	1985.0	—	—	
9	187768.0	51.1	12	1	1263.0	—	—	
10	410087.0	89.3	12	3	1059.0	1781.0	1224.0	
11	633819.0	75.5	12	2	1669.0	1172.0	—	
12	855582.0	93.7	12	3	1724.0	1506.0	1139.0	
Type 5 Radar Waveform_18								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	121879.0	85.8	17	3	1919.0	1601.0	1183.0	
1	292114.0	93.8	17	3	1568.0	1421.0	1289.0	
2	463142.0	80.4	17	2	1918.0	1045.0	—	
3	632546.0	88.7	17	3	1279.0	1859.0	1019.0	
4	101387.0	53.1	17	1	1538.0	—	—	
5	272229.0	51.2	17	1	1497.0	—	—	
6	442862.0	53.7	17	1	1820.0	—	—	
7	613788.0	58.0	17	1	1626.0	—	—	
8	80059.0	95.7	17	3	1629.0	1121.0	1303.0	
9	250584.0	71.4	17	2	1212.0	1973.0	—	
10	420875.0	79.2	17	2	1784.0	1627.0	—	
11	590329.0	97.9	17	3	1365.0	1821.0	1315.0	
12	59320.0	50.7	17	1	1347.0	—	—	
13	230038.0	58.8	17	1	1818.0	—	—	
14	400966.0	58.4	17	1	1519.0	—	—	
15	568893.0	91.1	17	3	1188.0	1978.0	1930.0	
16	38180.0	68.7	17	2	1157.0	1882.0	—	

Type 5 Radar Waveform_19

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	273495.0	62.5	12	1	1765.0	—	—
1	495666.0	96.5	12	3	1107.0	1132.0	1892.0
2	720635.0	53.0	12	1	1451.0	—	—
3	22484.0	78.9	12	2	1431.0	1974.0	—
4	246167.0	63.3	12	1	1033.0	—	—
5	469609.0	53.5	12	1	1391.0	—	—
6	692496.0	78.0	12	2	1167.0	1089.0	—
7	915369.0	74.9	12	2	1229.0	1485.0	—
8	217656.0	93.3	12	3	1679.0	1648.0	1776.0
9	440764.0	93.5	12	3	1356.0	1653.0	1115.0
10	663611.0	98.1	12	3	1398.0	1559.0	1205.0
11	887986.0	75.9	12	2	1007.0	1591.0	—
12	190991.0	54.5	12	1	1445.0	—	—

Type 5 Radar Waveform_20

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	267983.0	91.7	19	3	1481.0	1588.0	1099.0
1	413137.0	96.5	19	3	1029.0	1051.0	1155.0
2	558206.0	76.3	19	2	1674.0	1203.0	—
3	106101.0	54.4	19	1	1766.0	—	—
4	250746.0	70.1	19	2	1531.0	1296.0	—
5	394530.0	86.7	19	3	1020.0	1824.0	1567.0
6	540100.0	76.7	19	2	1175.0	1997.0	—
7	88062.0	76.0	19	2	1717.0	1181.0	—
8	232498.0	70.4	19	2	1995.0	1877.0	—
9	377228.0	77.3	19	2	1885.0	1750.0	—
10	521414.0	84.2	19	3	1339.0	1014.0	1797.0
11	70034.0	100.0	19	3	1836.0	1528.0	1149.0
12	215574.0	50.0	19	1	1415.0	—	—
13	359489.0	75.5	19	2	1600.0	1907.0	—
14	503785.0	85.7	19	3	1737.0	1177.0	1034.0
15	52416.0	68.1	19	2	1041.0	1517.0	—
16	196571.0	96.4	19	3	1284.0	1634.0	1891.0
17	342015.0	82.8	19	2	1801.0	1102.0	—
18	488315.0	50.1	19	1	1082.0	—	—
19	34455.0	89.9	19	3	1556.0	1580.0	1376.0

Type 5 Radar Waveform_21

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	188631.0	96.1	19	3	1144.0	1260.0	1223.0
1	340348.0	88.6	19	3	1308.0	1832.0	1558.0
2	492799.0	92.9	19	3	1190.0	1621.0	1361.0
3	17592.0	72.5	19	2	1056.0	1917.0	-
4	170419.0	64.8	19	1	1603.0	-	-
5	322285.0	72.5	19	2	1418.0	1983.0	-
6	473370.0	90.3	19	3	1838.0	1733.0	1509.0
7	629371.0	52.3	19	1	1017.0	-	-
8	151631.0	63.8	19	1	1468.0	-	-
9	304234.0	59.9	19	1	1921.0	-	-
10	457334.0	57.8	19	1	1387.0	-	-
11	610222.0	55.7	19	1	1338.0	-	-
12	132488.0	82.1	19	2	1500.0	1484.0	-
13	284401.0	91.1	19	3	1796.0	1350.0	1030.0
14	437026.0	79.8	19	2	1590.0	1925.0	-
15	590310.0	82.7	19	2	1241.0	1253.0	-
16	113596.0	71.6	19	2	1713.0	1895.0	-
17	265810.0	96.3	19	3	1390.0	1215.0	1213.0
18	417085.0	88.7	19	3	1628.0	1979.0	1678.0

Type 5 Radar Waveform_22

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	988044.0	71.8	9	2	1708.0	1632.0	-
1	164465.0	64.4	9	1	1872.0	-	-
2	427542.0	92.8	9	3	1929.0	1340.0	1269.0
3	690908.0	92.2	9	3	1168.0	1729.0	1819.0
4	955552.0	69.2	9	2	1704.0	1638.0	-
5	131786.0	68.8	9	2	1932.0	1138.0	-
6	395737.0	79.0	9	2	1641.0	1110.0	-
7	660271.0	63.3	9	1	1726.0	-	-
8	923458.0	78.0	9	2	1851.0	1023.0	-
9	99250.0	92.3	9	3	1113.0	1351.0	1022.0
10	363499.0	56.8	9	1	1942.0	-	-

Type 5 Radar Waveform_23

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	404463.0	97.0	16	3	1382.0	1000.0	1715.0
1	576731.0	60.6	16	1	1578.0	-	-
2	43066.0	97.9	16	3	1529.0	1666.0	1239.0
3	213365.0	86.1	16	3	1154.0	1160.0	1543.0
4	384645.0	58.4	16	1	1996.0	-	-
5	555526.0	53.0	16	1	1786.0	-	-
6	22202.0	53.6	16	1	1563.0	-	-
7	193100.0	53.7	16	1	1277.0	-	-
8	362838.0	89.6	16	3	1220.0	1127.0	1158.0
9	532485.0	97.7	16	3	1980.0	1047.0	1402.0
10	1155.0	96.4	16	3	1130.0	1571.0	1993.0
11	171769.0	74.3	16	2	1008.0	1419.0	-
12	342957.0	62.2	16	1	1240.0	-	-
13	513790.0	60.5	16	1	1330.0	-	-
14	683299.0	69.4	16	2	1004.0	1732.0	-
15	150710.0	78.5	16	2	1136.0	1498.0	-
16	321025.0	67.8	16	2	1743.0	1427.0	-

Type 5 Radar Waveform_24								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	698662.0	59.0	10	1	1009.0	—	—	
1	937942.0	95.7	10	3	1589.0	1292.0	1320.0	
2	184134.0	53.0	10	1	1604.0	—	—	
3	424692.0	96.5	10	3	1725.0	1972.0	1618.0	
4	668511.0	50.0	10	1	1467.0	—	—	
5	908373.0	94.1	10	3	1433.0	1346.0	1225.0	
6	154189.0	78.4	10	2	1095.0	1278.0	—	
7	395965.0	75.5	10	2	1823.0	1002.0	—	
8	638540.0	53.3	10	1	1686.0	—	—	
9	878193.0	96.5	10	3	1128.0	1585.0	1773.0	
10	124254.0	73.6	10	2	1443.0	1982.0	—	
11	366653.0	53.6	10	1	1527.0	—	—	
Type 5 Radar Waveform_25								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	382672.0	85.9	19	3	1494.0	1348.0	1143.0	
1	537325.0	59.2	19	1	1120.0	—	—	
2	59698.0	62.2	19	1	1904.0	—	—	
3	212635.0	60.1	19	1	1248.0	—	—	
4	365395.0	56.9	19	1	1446.0	—	—	
5	518574.0	62.9	19	1	1018.0	—	—	
6	40706.0	97.2	19	3	1654.0	1941.0	1094.0	
7	193716.0	57.8	19	1	1537.0	—	—	
8	344817.0	96.0	19	3	1599.0	1084.0	1952.0	
9	498503.0	82.6	19	2	1049.0	1526.0	—	
10	22059.0	76.7	19	2	1317.0	1053.0	—	
11	174412.0	79.0	19	2	1334.0	1938.0	—	
12	326702.0	67.8	19	2	1846.0	1607.0	—	
13	480817.0	56.6	19	1	1126.0	—	—	
14	3251.0	91.1	19	3	1478.0	1479.0	1507.0	
15	155705.0	75.4	19	2	1373.0	1642.0	—	
16	307433.0	90.1	19	3	1461.0	1842.0	1179.0	
17	460584.0	80.5	19	2	1076.0	1958.0	—	
18	613013.0	81.7	19	2	1162.0	1886.0	—	
Type 5 Radar Waveform_26								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	325922.0	99.8	5	3	1170.0	1541.0	1145.0	
1	688515.0	90.4	5	3	1680.0	1462.0	1299.0	
2	1053396.0	61.1	5	1	1367.0	—	—	
3	1416556.0	54.2	5	1	1689.0	—	—	
4	281428.0	82.3	5	2	1551.0	1230.0	—	
5	643774.0	89.2	5	3	1969.0	1452.0	1163.0	
6	1008388.0	60.3	5	1	1718.0	—	—	
7	1369627.0	97.0	5	3	1274.0	1173.0	1611.0	

Type 5 Radar Waveform_27

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	118275.0	66.6	15	1	1865.0	—	—
1	299525.0	69.4	15	2	1219.0	1135.0	—
2	481237.0	60.6	15	1	1757.0	—	—
3	663047.0	55.1	15	1	1375.0	—	—
4	95932.0	56.6	15	1	1807.0	—	—
5	277113.0	80.0	15	2	1048.0	1513.0	—
6	459130.0	50.1	15	1	1355.0	—	—
7	640453.0	53.7	15	1	1644.0	—	—
8	73275.0	88.5	15	3	1789.0	1553.0	1573.0
9	253904.0	84.1	15	3	1946.0	1963.0	1232.0
10	436579.0	64.1	15	1	1673.0	—	—
11	618314.0	55.2	15	1	1380.0	—	—
12	51096.0	97.6	15	3	1013.0	1493.0	1238.0
13	232140.0	72.3	15	2	1811.0	1760.0	—
14	413623.0	70.6	15	2	1329.0	1429.0	—
15	594657.0	71.8	15	2	1218.0	1785.0	—

Type 5 Radar Waveform_28

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	27126.0	76.4	16	2	1455.0	1602.0	—
1	197562.0	69.0	16	2	1201.0	1931.0	—
2	368238.0	74.1	16	2	1473.0	1207.0	—
3	538301.0	78.7	16	2	1667.0	1647.0	—
4	6115.0	93.4	16	3	1825.0	1699.0	1187.0
5	177028.0	53.0	16	1	1300.0	—	—
6	347789.0	53.0	16	1	1548.0	—	—
7	515854.0	85.4	16	3	1927.0	1753.0	1615.0
8	688033.0	72.8	16	2	1916.0	1065.0	—
9	155900.0	64.8	16	1	1658.0	—	—
10	326211.0	73.9	16	2	1696.0	1010.0	—
11	497434.0	63.3	16	1	1742.0	—	—
12	667383.0	74.7	16	2	1370.0	1244.0	—
13	134859.0	54.9	16	1	1675.0	—	—
14	304962.0	80.0	16	2	1472.0	1790.0	—
15	476005.0	70.9	16	2	1231.0	1092.0	—
16	643771.0	96.7	16	3	1827.0	1967.0	1651.0

Type 5 Radar Waveform_29

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	121024.0	66.0	15	1	1227.0	—	—
1	301949.0	80.6	15	2	1434.0	1466.0	—
2	482277.0	88.5	15	3	1749.0	1357.0	1134.0
3	662950.0	85.4	15	3	1684.0	1584.0	1194.0
4	98369.0	77.5	15	2	1947.0	1449.0	—
5	279240.0	70.1	15	2	1950.0	1990.0	—
6	459148.0	99.0	15	3	1856.0	1933.0	1829.0
7	642315.0	67.7	15	2	1039.0	1518.0	—
8	76284.0	52.9	15	1	1249.0	—	—
9	257728.0	52.5	15	1	1687.0	—	—
10	437287.0	91.3	15	3	2000.0	1312.0	1664.0
11	619347.0	76.0	15	2	1703.0	1624.0	—
12	53761.0	75.3	15	2	1612.0	1775.0	—
13	234322.0	84.1	15	3	1344.0	1816.0	1868.0
14	415686.0	77.5	15	2	1830.0	1968.0	—
15	597387.0	69.8	15	2	1428.0	1465.0	—



Radar Type 6 - Radar Statistical Performance			
Trail #	1=Detection 0=No Detection	Trail #	1=Detection 0=No Detection
0	1	15	1
1	1	16	1
2	1	17	1
3	1	18	1
4	1	19	1
5	1	20	1
6	1	21	1
7	1	22	1
8	1	23	1
9	1	24	1
10	1	25	1
11	1	26	1
12	1	27	1
13	1	28	1
14	1	29	1
Detection Percentage (%)		100%	

Type 6 Radar Waveform_0					
Frequency List (MHz)	0	1	2	3	4
0	5714	5306	5594	5360	5654
5	5394	5250	5417	5582	5461
10	5382	5507	5620	5374	5537
15	5458	5643	5689	5573	5353
20	5320	5535	5547	5629	5318
25	5287	5387	5503	5693	5418
30	5443	5389	5666	5684	5608
35	5621	5333	5326	5540	5580
40	5384	5521	5545	5309	5565
45	5607	5557	5641	5347	5363
50	5519	5600	5310	5526	5484
55	5312	5257	5569	5546	5414
60	5268	5340	5663	5283	5491
65	5675	5562	5657	5710	5380
70	5595	5661	5264	5252	5658
75	5356	5447	5602	5671	5302
80	5321	5427	5316	5624	5429
85	5656	5669	5337	5533	5261
90	5660	5357	5325	5468	5532
95	5463	5704	5329	5512	5475

Type 6 Radar Waveform_1					
Frequency List (MHz)	0	1	2	3	4
0	5494	5545	5530	5521	5496
5	5436	5272	5492	5648	5668
10	5313	5393	5283	5472	5558
15	5546	5295	5317	5706	5604
20	5585	5621	5291	5553	5336
25	5322	5452	5582	5278	5623
30	5424	5382	5504	5285	5597
35	5693	5320	5483	5306	5397
40	5587	5640	5699	5400	5628
45	5395	5301	5361	5615	5307
50	5634	5577	5447	5388	5517
55	5543	5433	5495	5584	5437
60	5401	5511	5445	5650	5398
65	5258	5347	5352	5410	5332
70	5406	5474	5316	5302	5679
75	5705	5572	5376	5669	5654
80	5593	5453	5528	5311	5523
85	5633	5538	5497	5489	5438
90	5529	5470	5250	5450	5680
95	5512	5698	5419	5491	5576

Type 6 Radar Waveform_2					
Frequency List (MHz)	0	1	2	3	4
0	5274	5309	5466	5682	5716
5	5575	5672	5567	5336	5400
10	5622	5657	5324	5667	5579
15	5537	5422	5420	5566	5262
20	5714	5295	5526	5710	5264
25	5441	5663	5337	5426	5486
30	5624	5580	5639	5534	5702
35	5424	5515	5393	5371	5408
40	5634	5687	5421	5701	5303
45	5326	5723	5660	5453	5271
50	5477	5412	5508	5578	5668
55	5637	5585	5488	5598	5705
60	5327	5507	5383	5699	5460
65	5632	5277	5445	5427	5333
70	5355	5259	5686	5365	5443
75	5436	5491	5283	5359	5340
80	5353	5555	5444	5572	5593
85	5556	5548	5493	5362	5645
90	5721	5323	5641	5434	5547
95	5546	5551	5623	5332	5718

Type 6 Radar Waveform_3					
Frequency List (MHz)	0	1	2	3	4
0	5529	5548	5402	5368	5558
5	5617	5694	5642	5499	5704
10	5553	5446	5365	5387	5600
15	5625	5549	5426	5611	5454
20	5722	5364	5467	5702	5712
25	5707	5612	5540	5530	5520
30	5666	5628	5537	5282	5308
35	5522	5466	5606	5286	5621
40	5419	5473	5392	5359	5300
45	5633	5547	5331	5718	5506
50	5305	5525	5653	5463	5415
55	5425	5381	5576	5352	5404
60	5362	5326	5288	5272	5634
65	5333	5329	5409	5668	5487
70	5337	5382	5319	5455	5583
75	5662	5324	5412	5556	5264
80	5353	5609	5544	5618	5441
85	5388	5475	5435	5616	5265
90	5361	5316	5321	5541	5488
95	5647	5468	5631	5559	5563

Type 6 Radar Waveform_4					
Frequency List (MHz)	0	1	2	3	4
0	5687	5312	5338	5529	5303
5	5659	5619	5717	5662	5436
10	5484	5710	5406	5582	5621
15	5713	5579	5656	5268	5633
20	5530	5408	5316	5685	5595
25	5464	5256	5554	5708	5517
30	5494	5497	5460	5720	5605
35	5697	5557	5299	5333	5475
40	5297	5706	5394	5562	5527
45	5414	5301	5559	5667	5401
50	5354	5514	5504	5629	5369
55	5569	5445	5698	5358	5453
60	5692	5563	5634	5372	5723
65	5704	5319	5607	5660	5571
70	5305	5458	5432	5638	5283
75	5284	5680	5342	5388	5463
80	5390	5438	5583	5374	5457
85	5326	5367	5264	5653	5405
90	5513	5668	5677	5695	5519
95	5516	5449	5421	5508	5378

Type 6 Radar Waveform_5					
Frequency List (MHz)	0	1	2	3	4
0	5467	5551	5274	5690	5620
5	5701	5641	5317	5253	5643
10	5318	5499	5447	5302	5642
15	5326	5706	5632	5604	5460
20	5599	5446	5308	5658	5386
25	5413	5471	5360	5588	5372
30	5503	5451	5712	5709	5540
35	5269	5410	5353	5452	5722
40	5723	5558	5710	5374	5391
45	5491	5497	5262	5515	5457
50	5277	5530	5565	5593	5691
55	5282	5484	5635	5517	5304
60	5487	5618	5637	5395	5557
65	5449	5307	5529	5463	5265
70	5388	5659	5614	5717	5699
75	5348	5323	5640	5476	5646
80	5397	5366	5435	5303	5378
85	5542	5552	5669	5321	5342
90	5559	5343	5439	5694	5275
95	5600	5414	5647	5716	5490

Type 6 Radar Waveform_6

Frequency List (MHz)	0	1	2	3	4
0	5722	5315	5685	5376	5365
5	5566	5392	5416	5472	5724
10	5288	5488	5400	5663	5414
15	5358	5260	5649	5652	5290
20	5387	5397	5631	5274	5265
25	5674	5464	5622	5408	5452
30	5386	5263	5501	5721	5702
35	5258	5562	5641	5648	5614
40	5388	5323	5390	5580	5320
45	5568	5344	5628	5706	5616
50	5304	5653	5635	5470	5438
55	5350	5714	5275	5308	5582
60	5383	5264	5272	5256	5679
65	5361	5294	5266	5337	5374
70	5561	5508	5590	5676	5600
75	5491	5417	5586	5427	5429
80	5432	5498	5281	5533	5602
85	5269	5634	5372	5282	5287
90	5655	5314	5711	5330	5584
95	5312	5626	5439	5377	5487

Type 6 Radar Waveform_7

Frequency List (MHz)	0	1	2	3	4
0	5502	5554	5621	5440	5682
5	5407	5588	5467	5579	5679
10	5655	5649	5529	5595	5684
15	5405	5485	5363	5694	5369
20	5560	5359	5328	5389	5604
25	5637	5592	5402	5568	5559
30	5456	5281	5365	5570	5635
35	5558	5450	5517	5380	5647
40	5401	5346	5489	5379	5385
45	5252	5370	5663	5378	5609
50	5667	5393	5476	5482	5658
55	5392	5540	5533	5624	5270
60	5473	5534	5306	5307	5680
65	5618	5571	5564	5544	5506
70	5360	5357	5566	5569	5464
75	5537	5285	5572	5696	5683
80	5628	5589	5332	5315	5472
85	5565	5364	5326	5577	5576
90	5293	5410	5423	5253	5685
95	5508	5283	5439	5318	5416

Type 6 Radar Waveform_8					
Frequency List (MHz)	0	1	2	3	4
0	5282	5318	5557	5601	5427
5	5449	5513	5542	5267	5411
10	5489	5438	5570	5315	5705
15	5493	5612	5369	5264	5561
20	5568	5525	5366	5478	5577
25	5428	5541	5508	5294	5593
30	5595	5322	5310	5312	5378
35	5589	5683	5313	5533	5715
40	5429	5619	5382	5559	5350
45	5271	5436	5674	5496	5283
50	5583	5718	5482	5299	5426
55	5371	5346	5255	5352	5399
60	5638	5569	5607	5253	5251
65	5654	5403	5456	5250	5578
70	5443	5664	5681	5445	5594
75	5441	5487	5680	5266	5349
80	5709	5464	5317	5652	5329
85	5510	5659	5314	5625	5556
90	5467	5377	5611	5300	5347
95	5532	5270	5440	5649	5386
Type 6 Radar Waveform_9					
Frequency List (MHz)	0	1	2	3	4
0	5440	5557	5493	5287	5269
5	5491	5535	5617	5333	5618
10	5420	5702	5708	5510	5251
15	5581	5642	5472	5687	5278
20	5576	5691	5307	5470	5550
25	5316	5393	5711	5398	5627
30	5637	5631	5279	5525	5561
35	5253	5299	5584	5308	5572
40	5554	5512	5365	5476	5488
45	5330	5354	5397	5252	5286
50	5634	5284	5294	5571	5597
55	5273	5462	5300	5445	5549
60	5566	5528	5328	5514	5295
65	5433	5674	5497	5675	5690
70	5613	5272	5429	5667	5530
75	5421	5553	5410	5607	5722
80	5601	5344	5720	5481	5715
85	5326	5705	5562	5588	5335
90	5331	5384	5595	5431	5305
95	5381	5679	5544	5495	5633

Type 6 Radar Waveform_10

Frequency List (MHz)	0	1	2	3	4
0	5695	5321	5429	5448	5489
5	5630	5557	5692	5496	5447
10	5254	5491	5274	5705	5272
15	5669	5294	5575	5257	5470
20	5487	5285	5723	5559	5523
25	5582	5342	5439	5502	5661
30	5679	5617	5711	5265	5713
35	5396	5295	5477	5461	5486
40	5490	5595	5303	5527	5473
45	5417	5310	5437	5455	5305
50	5648	5413	5460	5345	5282
55	5323	5650	5635	5368	5537
60	5560	5493	5459	5602	5356
65	5717	5698	5624	5629	5445
70	5618	5331	5344	5415	5292
75	5397	5512	5252	5394	5703
80	5378	5454	5501	5645	5425
85	5562	5570	5300	5382	5632
90	5318	5596	5311	5561	5653
95	5401	5550	5476	5348	5592

Type 6 Radar Waveform_11

Frequency List (MHz)	0	1	2	3	4
0	5475	5560	5365	5609	5331
5	5672	5482	5292	5659	5654
10	5660	5280	5315	5328	5293
15	5421	5678	5302	5662	5495
20	5451	5286	5551	5496	5470
25	5669	5642	5606	5695	5343
30	5506	5668	5383	5487	5594
35	5434	5578	5273	5614	5400
40	5329	5300	5716	5724	5520
45	5513	5261	5438	5289	5636
50	5396	5371	5621	5539	5363
55	5586	5253	5411	5689	5658
60	5501	5657	5663	5521	5573
65	5665	5655	5413	5401	5295
70	5373	5471	5251	5372	5440
75	5684	5630	5467	5282	5712
80	5463	5320	5620	5465	5412
85	5611	5643	5336	5308	5613
90	5414	5352	5346	5418	5605
95	5698	5374	5705	5576	5337

Type 6 Radar Waveform_12

Frequency List (MHz)	0	1	2	3	4
0	5255	5324	5301	5295	5551
5	5714	5504	5367	5347	5386
10	5591	5641	5356	5523	5314
15	5273	5548	5306	5250	5476
20	5503	5520	5702	5640	5469
25	5261	5521	5370	5332	5254
30	5385	5395	5625	5598	5414
35	5573	5669	5544	5389	5411
40	5643	5383	5654	5532	5467
45	5653	5648	5603	5474	5325
50	5337	5447	5460	5444	5483
55	5540	5443	5481	5382	5343
60	5348	5446	5266	5609	5722
65	5522	5604	5487	5683	5412
70	5585	5484	5455	5349	5430
75	5695	5492	5583	5665	5310
80	5577	5538	5401	5526	5437
85	5368	5671	5655	5608	5387
90	5556	5336	5451	5420	5703
95	5299	5435	5660	5682	5272

Type 6 Radar Waveform_13

Frequency List (MHz)	0	1	2	3	4
0	5413	5563	5712	5456	5393
5	5281	5429	5442	5510	5690
10	5425	5430	5397	5718	5335
15	5361	5675	5312	5295	5668
20	5414	5686	5643	5632	5624
25	5470	5476	5436	5288	5427
30	5381	5582	5338	5612	5285
35	5437	5542	5325	5482	5466
40	5592	5464	5485	5628	5532
45	5367	5590	5516	5513	5498
50	5549	5267	5330	5264	5494
55	5633	5678	5353	5472	5391
60	5573	5406	5555	5545	5471
65	5640	5697	5575	5593	5657
70	5398	5304	5389	5567	5515
75	5629	5268	5562	5687	5319
80	5565	5589	5692	5368	5634
85	5372	5341	5329	5631	5616
90	5426	5323	5488	5408	5715
95	5666	5645	5566	5594	5373

Type 6 Radar Waveform_14

Frequency List (MHz)	0	1	2	3	4
0	5668	5327	5648	5617	5613
5	5420	5451	5517	5576	5422
10	5356	5694	5438	5449	5705
15	5415	5340	5385	5280	5681
20	5721	5512	5322	5679	5540
25	5566	5270	5539	5553	5662
30	5432	5279	5376	5708	5695
35	5714	5418	5646	5530	5440
40	5558	5414	5608	5294	5590
45	5477	5295	5689	5549	5638
50	5468	5274	5452	5448	5348
55	5497	5702	5601	5678	5336
60	5502	5707	5598	5271	5676
65	5529	5370	5396	5351	5456
70	5498	5531	5536	5635	5297
75	5724	5339	5700	5575	5254
80	5352	5510	5564	5441	5577
85	5354	5306	5357	5272	5543
90	5545	5317	5447	5634	5587
95	5277	5602	5589	5458	5652

Type 6 Radar Waveform_15

Frequency List (MHz)	0	1	2	3	4
0	5448	5663	5584	5681	5455
5	5462	5376	5592	5264	5629
10	5287	5483	5479	5536	5377
15	5440	5357	5518	5385	5577
20	5430	5446	5622	5713	5388
25	5303	5271	5407	5644	5356
30	5608	5634	5496	5671	5339
35	5630	5418	5467	5504	5373
40	5250	5257	5254	5371	5680
45	5555	5343	5588	5551	5473
50	5267	5646	5390	5600	5349
55	5291	5596	5543	5402	5538
60	5316	5673	5633	5368	5378
65	5334	5544	5472	5369	5615
70	5262	5674	5423	5442	5501
75	5380	5655	5307	5408	5280
80	5705	5591	5335	5321	5337
85	5686	5547	5449	5657	5659
90	5309	5346	5350	5552	5471
95	5535	5294	5529	5583	5256

Type 6 Radar Waveform_16					
Frequency List (MHz)	0	1	2	3	4
0	5703	5427	5520	5367	5675
5	5504	5398	5667	5458	5596
10	5272	5617	5256	5528	5484
15	5621	5333	5294	5341	5515
20	5563	5327	5361	5666	5598
25	5610	5370	5390	5650	5620
30	5453	5411	5588	5450	5557
35	5655	5300	5623	5639	5571
40	5337	5309	5348	5552	5568
45	5460	5609	5526	5629	5522
50	5566	5651	5438	5589	5540
55	5356	5253	5513	5644	5287
60	5533	5323	5641	5456	5490
65	5295	5318	5532	5477	5592
70	5525	5704	5631	5266	5377
75	5400	5486	5686	5368	5612
80	5485	5683	5267	5649	5291
85	5717	5376	5274	5372	5636
90	5541	5328	5512	5638	5600
95	5405	5715	5436	5406	5260
Type 6 Radar Waveform_17					
Frequency List (MHz)	0	1	2	3	4
0	5483	5666	5456	5528	5517
5	5546	5323	5267	5590	5665
10	5527	5633	5658	5451	5419
15	5616	5611	5724	5378	5486
20	5349	5681	5504	5319	5334
25	5457	5450	5338	5474	5424
30	5692	5509	5410	5626	5265
35	5270	5599	5271	5668	5301
40	5553	5420	5722	5588	5549
45	5579	5640	5667	5482	5398
50	5702	5412	5387	5444	5310
55	5443	5332	5615	5416	5698
60	5268	5473	5282	5533	5496
65	5687	5306	5280	5664	5511
70	5604	5607	5700	5520	5629
75	5620	5458	5490	5649	5463
80	5583	5559	5552	5608	5680
85	5568	5617	5351	5371	5570
90	5326	5547	5394	5650	5363
95	5321	5385	5656	5659	5335

Type 6 Radar Waveform_18					
Frequency List (MHz)	0	1	2	3	4
0	5641	5430	5392	5689	5262
5	5685	5345	5342	5656	5397
10	5458	5422	5699	5646	5440
15	5704	5263	5255	5423	5678
20	5357	5275	5542	5408	5404
25	5399	5444	5578	5356	5495
30	5367	5366	5514	5468	5362
35	5464	5454	5467	5724	5600
40	5660	5353	5546	5411	5431
45	5723	5628	5535	5306	5652
50	5443	5278	5616	5613	5331
55	5632	5264	5536	5626	5489
60	5545	5388	5310	5402	5680
65	5479	5319	5691	5694	5461
70	5358	5497	5607	5583	5659
75	5693	5543	5675	5648	5300
80	5568	5271	5338	5623	5580
85	5279	5552	5547	5643	5663
90	5485	5305	5522	5390	5491
95	5553	5299	5654	5284	5256

Type 6 Radar Waveform_19					
Frequency List (MHz)	0	1	2	3	4
0	5421	5669	5328	5375	5579
5	5252	5270	5417	5344	5701
10	5292	5686	5265	5366	5461
15	5695	5293	5358	5468	5395
20	5268	5441	5483	5400	5377
25	5611	5251	5647	5682	5492
30	5398	5384	5324	5484	5666
35	5288	5402	5453	5260	5704
40	5478	5660	5683	5598	5593
45	5543	5340	5411	5331	5588
50	5571	5528	5619	5329	5327
55	5436	5653	5345	5693	5445
60	5460	5674	5553	5255	5709
65	5506	5425	5520	5640	5662
70	5348	5489	5264	5430	5580
75	5707	5629	5559	5618	5565
80	5663	5343	5552	5581	5527
85	5405	5577	5474	5455	5389
90	5703	5380	5450	5356	5295
95	5656	5333	5536	5393	5273

Type 6 Radar Waveform_20						
Frequency List (MHz)	0	1	2	3	4	
0	5676	5433	5264	5536	5324	
5	5294	5292	5492	5507	5698	
10	5475	5306	5464	5482	5308	
15	5420	5461	5416	5684	5276	
20	5607	5424	5489	5350	5499	
25	5675	5375	5408	5526	5440	
30	5273	5281	5699	5486	5541	
35	5544	5628	5382	5392	5291	
40	5261	5637	5269	5391	5414	
45	5641	5458	5404	5320	5380	
50	5259	5597	5533	5647	5441	
55	5642	5431	5328	5718	5332	
60	5371	5343	5589	5601	5655	
65	5381	5542	5599	5566	5710	
70	5478	5438	5577	5534	5389	
75	5610	5329	5691	5569	5274	
80	5574	5669	5358	5706	5666	
85	5318	5310	5543	5346	5662	
90	5270	5321	5405	5290	5528	
95	5370	5503	5603	5672	5369	
Type 6 Radar Waveform_21						
Frequency List (MHz)	0	1	2	3	4	
0	5456	5672	5675	5697	5641	
5	5433	5692	5567	5670	5640	
10	5532	5264	5347	5659	5503	
15	5396	5547	5564	5461	5401	
20	5284	5676	5462	5481	5323	
25	5387	5527	5578	5512	5560	
30	5579	5259	5713	5439	5592	
35	5306	5583	5257	5424	5535	
40	5338	5471	5474	5501	5634	
45	5576	5371	5497	5705	5694	
50	5723	5658	5496	5431	5505	
55	5557	5444	5721	5601	5631	
60	5402	5360	5408	5620	5373	
65	5255	5414	5544	5538	5637	
70	5390	5651	5345	5671	5552	
75	5335	5327	5536	5428	5591	
80	5581	5326	5258	5434	5571	
85	5486	5358	5645	5251	5667	
90	5283	5361	5316	5606	5511	
95	5668	5304	5678	5514	5307	

Type 6 Radar Waveform_22

Frequency List (MHz)	0	1	2	3	4
0	5614	5436	5611	5286	5386
5	5475	5714	5642	5261	5469
10	5463	5625	5388	5379	5524
15	5484	5674	5667	5506	5593
20	5670	5367	5403	5570	5296
25	5653	5306	5616	5594	5621
30	5623	5654	5366	5504	5722
35	5348	5695	5310	5317	5652
40	5554	5315	5266	5631	5505
45	5351	5580	5288	5272	5610
50	5534	5672	5482	5283	5337
55	5555	5346	5280	5276	5489
60	5573	5662	5680	5556	5360
65	5487	5673	5697	5543	5365
70	5538	5338	5651	5390	5495
75	5375	5451	5578	5669	5358
80	5339	5345	5422	5497	5471
85	5681	5689	5384	5626	5564
90	5426	5676	5716	5560	5526
95	5421	5638	5396	5464	5292

Type 6 Radar Waveform_23

Frequency List (MHz)	0	1	2	3	4
0	5394	5675	5547	5447	5703
5	5517	5639	5717	5424	5676
10	5414	5429	5574	5545	5475
15	5326	5673	5551	5310	5678
20	5436	5344	5562	5269	5541
25	5328	5412	5720	5628	5663
30	5512	5627	5297	5518	5324
35	5386	5439	5491	5463	5706
40	5588	5637	5253	5506	5337
45	5331	5346	5325	5400	5410
50	5373	5533	5305	5581	5710
55	5525	5536	5477	5722	5618
60	5263	5607	5609	5479	5306
65	5568	5612	5432	5338	5329
70	5437	5621	5438	5403	5366
75	5454	5571	5721	5650	5513
80	5449	5601	5489	5560	5468
85	5401	5426	5274	5591	5624
90	5680	5275	5345	5635	5693
95	5419	5294	5443	5409	5490

Type 6 Radar Waveform_24					
Frequency List (MHz)	0	1	2	3	4
0	5649	5439	5483	5608	5448
5	5559	5661	5317	5587	5408
10	5703	5678	5567	5294	5566
15	5563	5356	5301	5499	5502
20	5686	5602	5382	5651	5717
25	5332	5655	5615	5349	5662
30	5327	5498	5584	5512	5292
35	5619	5428	5530	5384	5616
40	5620	5427	5720	5666	5625
45	5266	5689	5271	5307	5281
50	5287	5286	5549	5394	5404
55	5654	5713	5366	5251	5296
60	5693	5272	5552	5441	5305
65	5385	5648	5264	5607	5509
70	5252	5342	5413	5691	5389
75	5631	5290	5653	5623	5465
80	5596	5639	5268	5712	5671
85	5459	5320	5585	5444	5531
90	5308	5687	5702	5269	5455
95	5273	5403	5667	5325	5310

Type 6 Radar Waveform_25					
Frequency List (MHz)	0	1	2	3	4
0	5429	5678	5419	5294	5290
5	5698	5586	5392	5275	5615
10	5634	5467	5608	5587	5651
15	5483	5404	5544	5694	5597
20	5671	5323	5643	5690	5695
25	5604	5343	5550	5696	5369
30	5387	5541	5252	5444	5342
35	5567	5621	5655	5391	5631
40	5266	5425	5414	5719	5670
45	5669	5354	5365	5334	5552
50	5540	5250	5635	5702	5501
55	5426	5320	5441	5590	5664
60	5401	5593	5497	5273	5606
65	5295	5592	5474	5500	5410
70	5576	5318	5372	5660	5336
75	5435	5612	5542	5572	5638
80	5308	5462	5316	5585	5297
85	5291	5424	5371	5261	5642
90	5314	5721	5487	5281	5472
95	5328	5565	5304	5508	5272

Type 6 Radar Waveform_26					
Frequency List (MHz)	0	1	2	3	4
0	5684	5442	5355	5455	5510
5	5265	5608	5467	5341	5444
10	5565	5256	5649	5587	5264
15	5610	5507	5589	5411	5605
20	5362	5257	5663	5486	5456
25	5546	5654	5633	5276	5498
30	5693	5637	5706	5712	5451
35	5544	5545	5580	5508	5542
40	5716	5502	5437	5423	5387
45	5439	5416	5329	5686	5572
50	5428	5445	5614	5274	5534
55	5409	5538	5433	5283	5539
60	5529	5318	5623	5306	5295
65	5688	5275	5579	5425	5672
70	5331	5532	5578	5593	5319
75	5682	5419	5506	5371	5459
80	5524	5260	5483	5292	5325
85	5509	5462	5386	5320	5658
90	5369	5390	5586	5383	5463
95	5718	5367	5667	5290	5252

Type 6 Radar Waveform_27					
Frequency List (MHz)	0	1	2	3	4
0	5367	5681	5291	5616	5352
5	5307	5533	5542	5504	5651
10	5399	5617	5690	5629	5255
15	5262	5610	5537	5603	5613
20	5431	5302	5724	5636	5374
25	5308	5274	5283	5667	5550
30	5455	5585	5370	5360	5425
35	5344	5697	5459	5419	5591
40	5480	5322	5713	5520	5384
45	5440	5704	5292	5505	5661
50	5251	5327	5703	5606	5509
55	5562	5448	5484	5412	5355
60	5662	5707	5659	5491	5444
65	5547	5648	5290	5501	5479
70	5624	5574	5571	5695	5675
75	5573	5434	5456	5328	5445
80	5366	5320	5257	5279	5282
85	5660	5551	5326	5692	5499
90	5438	5452	5361	5640	5346
95	5429	5365	5404	5285	5570

Type 6 Radar Waveform_28

Frequency List (MHz)	0	1	2	3	4
0	5622	5445	5702	5302	5572
5	5349	5555	5617	5667	5383
10	5330	5406	5256	5502	5650
15	5343	5389	5616	5582	5417
20	5524	5597	5718	5338	5609
25	5262	5257	5380	5387	5701
30	5592	5626	5412	5325	5619
35	5655	5516	5615	5472	5470
40	5355	5296	5418	5562	5710
45	5263	5603	5442	5493	5591
50	5643	5681	5313	5372	5549
55	5711	5657	5439	5425	5480
60	5691	5613	5429	5341	5656
65	5705	5342	5598	5348	5457
70	5672	5648	5647	5501	5624
75	5724	5373	5599	5292	5456
80	5497	5356	5523	5683	5283
85	5295	5600	5530	5716	5332
90	5251	5511	5620	5436	5259
95	5449	5460	5280	5316	5551

Type 6 Radar Waveform_29

Frequency List (MHz)	0	1	2	3	4
0	5402	5684	5638	5463	5414
5	5488	5480	5692	5355	5687
10	5639	5670	5297	5697	5671
15	5431	5419	5719	5627	5609
20	5532	5666	5659	5330	5582
25	5528	5584	5583	5588	5260
30	5634	5612	5369	5540	5296
35	5378	5551	5607	5411	5625
40	5384	5669	5379	5356	5327
45	5707	5667	5589	5686	5500
50	5546	5381	5422	5382	5364
55	5461	5372	5558	5606	5611
60	5629	5451	5345	5303	5374
65	5648	5579	5651	5640	5605
70	5655	5252	5475	5685	5650
75	5350	5600	5683	5342	5338
80	5536	5503	5440	5712	5426
85	5657	5353	5718	5251	5622
90	5343	5487	5565	5284	5678
95	5406	5435	5663	5393	5620

Test Site	WJ-SR8	Test Engineer	Jake Lan
Test Date	20216-02-26		
Test Item	Radar Statistical Performance Check (802.11be-EHT160 - 5250 MHz)		

Radar Type 1-4 - Radar Statistical Performance								
Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect
0	5286	1	5250	1	5307	1	5292	1
1	5322	1	5330	1	5282	1	5250	1
2	5314	1	5288	1	5290	1	5310	0
3	5287	1	5254	1	5253	1	5290	1
4	5250	1	5307	1	5296	1	5254	1
5	5330	0	5290	1	5276	1	5270	1
6	5289	1	5298	1	5302	1	5286	1
7	5298	1	5253	1	5319	1	5324	1
8	5319	1	5270	1	5303	0	5253	0
9	5256	1	5280	0	5252	1	5326	1
10	5290	1	5300	1	5330	1	5288	1
11	5264	1	5276	0	5309	1	5330	0
12	5270	1	5286	0	5262	1	5320	1
13	5299	1	5274	1	5321	0	5267	0
14	5296	1	5306	1	5274	1	5280	1
15	5261	1	5310	1	5271	0	5313	1
16	5267	1	5321	0	5250	1	5297	0
17	5280	1	5272	1	5284	1	5266	1
18	5301	1	5325	1	5325	1	5260	1
19	5276	1	5251	1	5312	1	5308	1
20	5266	1	5289	1	5318	0	5287	1
21	5300	1	5302	1	5267	0	5329	0
22	5277	1	5285	1	5281	1	5304	1
23	5311	0	5295	0	5280	1	5251	1
24	5272	0	5282	1	5310	0	5307	1
25	5268	1	5323	1	5279	0	5277	1
26	5260	1	5260	1	5315	0	5309	0
27	5284	1	5261	1	5270	1	5271	1



Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency	1=detect	Frequency	1=detect	Frequency	1=detect	Frequency	1=detect
	(MHz)	0=no detect	(MHz)	0=no detect	(MHz)	0=no detect	(MHz)	0=no detect
28	5279	1	5320	1	5260	1	5284	1
29	5323	1	5304	1	5293	1	5311	1
Probability:	90.0%		83.3%		73.3%		76.7%	
Aggregate:	80.8% (>80%)							

Radar Type 1 - Radar Waveform							Radar Type 2 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 1	1.0	758.0	70	53060.0	Download	0	Type 2	4.9	230.0	29	6670.0
Download	1	Type 1	1.0	738.0	72	53136.0	Download	1	Type 2	4.2	205.0	28	5740.0
Download	2	Type 1	1.0	718.0	74	53132.0	Download	2	Type 2	3.0	176.0	26	4576.0
Download	3	Type 1	1.0	798.0	67	53466.0	Download	3	Type 2	4.9	206.0	29	5974.0
Download	4	Type 1	1.0	938.0	57	53466.0	Download	4	Type 2	1.0	159.0	23	3657.0
Download	5	Type 1	1.0	898.0	59	52982.0	Download	5	Type 2	2.0	192.0	24	4608.0
Download	6	Type 1	1.0	858.0	81	53298.0	Download	6	Type 2	2.1	196.0	24	4704.0
Download	7	Type 1	1.0	598.0	89	53222.0	Download	7	Type 2	3.2	207.0	26	5382.0
Download	8	Type 1	1.0	578.0	92	53176.0	Download	8	Type 2	2.3	179.0	25	4475.0
Download	9	Type 1	1.0	538.0	99	53262.0	Download	9	Type 2	2.3	226.0	25	5650.0
Download	10	Type 1	1.0	698.0	76	53048.0	Download	10	Type 2	4.3	165.0	28	4620.0
Download	11	Type 1	1.0	838.0	63	52794.0	Download	11	Type 2	3.4	185.0	27	4995.0
Download	12	Type 1	1.0	878.0	61	53558.0	Download	12	Type 2	4.7	225.0	29	6525.0
Download	13	Type 1	1.0	818.0	65	53170.0	Download	13	Type 2	2.9	183.0	26	4758.0
Download	14	Type 1	1.0	618.0	86	53148.0	Download	14	Type 2	5.0	222.0	29	6438.0
Download	15	Type 1	1.0	2914.0	19	55366.0	Download	15	Type 2	3.2	187.0	26	4862.0
Download	16	Type 1	1.0	1299.0	41	53259.0	Download	16	Type 2	4.7	198.0	29	5742.0
Download	17	Type 1	1.0	2454.0	22	53988.0	Download	17	Type 2	2.8	216.0	26	5616.0
Download	18	Type 1	1.0	968.0	55	53240.0	Download	18	Type 2	4.7	160.0	29	4640.0
Download	19	Type 1	1.0	624.0	85	53040.0	Download	19	Type 2	4.5	158.0	29	4582.0
Download	20	Type 1	1.0	1157.0	46	53222.0	Download	20	Type 2	3.7	188.0	27	5076.0
Download	21	Type 1	1.0	1183.0	45	53235.0	Download	21	Type 2	3.2	228.0	26	5928.0
Download	22	Type 1	1.0	2384.0	23	54832.0	Download	22	Type 2	2.1	202.0	24	4848.0
Download	23	Type 1	1.0	1338.0	40	53520.0	Download	23	Type 2	2.6	154.0	25	3850.0
Download	24	Type 1	1.0	1699.0	32	54368.0	Download	24	Type 2	2.4	208.0	25	5200.0
Download	25	Type 1	1.0	1135.0	47	53345.0	Download	25	Type 2	2.0	168.0	24	4032.0
Download	26	Type 1	1.0	2883.0	19	54777.0	Download	26	Type 2	3.1	167.0	26	4342.0
Download	27	Type 1	1.0	1347.0	40	53880.0	Download	27	Type 2	4.4	175.0	28	4900.0
Download	28	Type 1	1.0	604.0	88	53152.0	Download	28	Type 2	1.6	191.0	24	4584.0
Download	29	Type 1	1.0	2967.0	18	53406.0	Download	29	Type 2	2.4	162.0	25	4050.0



Radar Type 3 - Radar Waveform							Radar Type 4 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 3	9.9	378.0	18	6804.0	Download	0	Type 4	19.8	378.0	16	6048.0
Download	1	Type 3	9.2	317.0	18	5706.0	Download	1	Type 4	18.1	317.0	15	4755.0
Download	2	Type 3	8.0	271.0	17	4607.0	Download	2	Type 4	15.5	271.0	14	3794.0
Download	3	Type 3	9.9	289.0	18	5202.0	Download	3	Type 4	19.7	289.0	16	4624.0
Download	4	Type 3	6.0	487.0	16	7792.0	Download	4	Type 4	11.0	487.0	12	5844.0
Download	5	Type 3	7.0	407.0	16	6512.0	Download	5	Type 4	13.3	407.0	13	5291.0
Download	6	Type 3	7.1	345.0	16	5520.0	Download	6	Type 4	13.5	345.0	13	4485.0
Download	7	Type 3	8.2	201.0	17	3417.0	Download	7	Type 4	16.0	201.0	14	2814.0
Download	8	Type 3	7.3	495.0	16	7920.0	Download	8	Type 4	13.9	495.0	13	6435.0
Download	9	Type 3	7.3	214.0	16	3424.0	Download	9	Type 4	13.9	214.0	13	2782.0
Download	10	Type 3	9.3	451.0	18	8118.0	Download	10	Type 4	18.4	451.0	16	7216.0
Download	11	Type 3	8.4	459.0	17	7803.0	Download	11	Type 4	16.3	459.0	14	6426.0
Download	12	Type 3	9.7	401.0	18	7218.0	Download	12	Type 4	19.2	401.0	16	6416.0
Download	13	Type 3	7.9	272.0	17	4624.0	Download	13	Type 4	15.3	272.0	14	3808.0
Download	14	Type 3	10.0	375.0	18	6750.0	Download	14	Type 4	19.9	375.0	16	6000.0
Download	15	Type 3	8.2	357.0	17	6069.0	Download	15	Type 4	16.0	357.0	14	4998.0
Download	16	Type 3	9.7	383.0	18	6894.0	Download	16	Type 4	19.3	383.0	16	6128.0
Download	17	Type 3	7.8	227.0	17	3859.0	Download	17	Type 4	15.1	227.0	14	3178.0
Download	18	Type 3	9.7	420.0	18	7560.0	Download	18	Type 4	19.2	420.0	16	6720.0
Download	19	Type 3	9.5	264.0	18	4752.0	Download	19	Type 4	18.9	264.0	16	4224.0
Download	20	Type 3	8.7	406.0	18	7308.0	Download	20	Type 4	17.1	406.0	15	6090.0
Download	21	Type 3	8.2	476.0	17	8092.0	Download	21	Type 4	16.0	476.0	14	6664.0
Download	22	Type 3	7.1	307.0	16	4912.0	Download	22	Type 4	13.5	307.0	13	3991.0
Download	23	Type 3	7.6	439.0	17	7463.0	Download	23	Type 4	14.6	439.0	14	6146.0
Download	24	Type 3	7.4	344.0	17	5848.0	Download	24	Type 4	14.2	344.0	13	4472.0
Download	25	Type 3	7.0	309.0	16	4944.0	Download	25	Type 4	13.3	309.0	13	4017.0
Download	26	Type 3	8.1	426.0	17	7242.0	Download	26	Type 4	15.8	426.0	14	5964.0
Download	27	Type 3	9.4	294.0	18	5292.0	Download	27	Type 4	18.6	294.0	16	4704.0
Download	28	Type 3	6.6	490.0	16	7840.0	Download	28	Type 4	12.4	490.0	12	5880.0
Download	29	Type 3	7.4	246.0	17	4182.0	Download	29	Type 4	14.1	246.0	13	3198.0



Radar Type 5 - Radar Statistical Performance					
Trail #	Test Freq. (MHz)	1=Detection 0=No Detection	Trail #	Test Freq. (MHz)	1=Detection 0=No Detection
0	5290	1	15	5255.2	1
1	5290	1	16	5257.6	1
2	5290	1	17	5254.8	1
3	5290	1	18	5257.6	1
4	5290	1	19	5257.2	1
5	5290	1	20	5324	1
6	5290	1	21	5324.8	1
7	5290	1	22	5326.4	1
8	5290	1	23	5325.6	1
9	5290	1	24	5326	1
10	5257.2	1	25	5326.4	1
11	5255.6	1	26	5324.8	1
12	5257.6	1	27	5322.8	1
13	5254.8	1	28	5327.2	1
14	5258	1	29	5326	1
Detection Percentage (%)			100%		

Type 5 Radar Waveform_0

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	126342.0	98.5	20	3	1836.0	1367.0	1821.0
1	270596.0	89.1	20	3	1893.0	1707.0	1525.0
2	416513.0	74.7	20	2	1309.0	1463.0	—
3	560012.0	98.2	20	3	1285.0	1284.0	1637.0
4	109263.0	50.4	20	1	1213.0	—	—
5	254219.0	63.0	20	1	1845.0	—	—
6	399344.0	63.9	20	1	1764.0	—	—
7	543249.0	77.8	20	2	1675.0	1393.0	—
8	91289.0	66.2	20	1	1771.0	—	—
9	236455.0	66.0	20	1	1577.0	—	—
10	379960.0	90.8	20	3	1144.0	1468.0	1524.0
11	524959.0	79.4	20	2	1826.0	1761.0	—
12	73120.0	95.4	20	3	1431.0	1474.0	1287.0
13	217993.0	74.0	20	2	1550.0	1628.0	—
14	362528.0	99.5	20	3	1250.0	1024.0	1254.0
15	508348.0	77.9	20	2	1112.0	1056.0	—
16	55335.0	96.0	20	3	1396.0	1555.0	1094.0
17	200441.0	72.7	20	2	1046.0	1304.0	—
18	344062.0	95.2	20	3	1473.0	1656.0	1518.0
19	488075.0	93.5	20	3	1848.0	1410.0	1851.0

Type 5 Radar Waveform_1

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	41739.0	83.7	17	3	1392.0	1389.0	1113.0
1	202804.0	77.8	17	2	1102.0	1739.0	—
2	364365.0	64.3	17	1	1815.0	—	—
3	524609.0	70.1	17	2	1115.0	1969.0	—
4	21963.0	67.6	17	2	1516.0	1640.0	—
5	183477.0	62.7	17	1	1010.0	—	—
6	343890.0	76.5	17	2	1608.0	1390.0	—
7	503845.0	92.1	17	3	1419.0	1673.0	1228.0
8	2145.0	58.2	17	1	1936.0	—	—
9	163152.0	67.2	17	2	1514.0	1283.0	—
10	324254.0	82.8	17	2	1157.0	1449.0	—
11	485176.0	69.4	17	2	1209.0	1581.0	—
12	645917.0	78.8	17	2	1600.0	1467.0	—
13	143363.0	77.5	17	2	1104.0	1490.0	—
14	303831.0	72.7	17	2	1952.0	1931.0	—
15	466306.0	60.4	17	1	1416.0	—	—
16	625646.0	96.0	17	3	1163.0	1039.0	1338.0
17	123073.0	90.9	17	3	1427.0	1701.0	1891.0

Type 5 Radar Waveform_2								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	366597.0	56.3	12	1	1690.0	—	—	
1	573392.0	72.3	12	2	1162.0	1540.0	—	
2	781794.0	61.8	12	1	1418.0	—	—	
3	133146.0	85.2	12	3	1099.0	1545.0	1741.0	
4	341054.0	54.2	12	1	1658.0	—	—	
5	547714.0	72.4	12	2	1887.0	1053.0	—	
6	755997.0	59.2	12	1	1681.0	—	—	
7	107641.0	98.4	12	3	1837.0	1635.0	1149.0	
8	315695.0	64.7	12	1	1120.0	—	—	
9	520907.0	83.6	12	3	1232.0	1919.0	1895.0	
10	728225.0	88.0	12	3	1411.0	1215.0	1650.0	
11	82152.0	87.1	12	3	1865.0	1026.0	1943.0	
12	289240.0	81.8	12	2	1874.0	1849.0	—	
13	495837.0	95.2	12	3	1698.0	1604.0	1081.0	
Type 5 Radar Waveform_3								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	490824.0	95.2	20	3	1499.0	1782.0	1045.0	
1	39700.0	75.5	20	2	1778.0	1352.0	—	
2	184213.0	78.0	20	2	1998.0	1929.0	—	
3	328961.0	70.7	20	2	1994.0	1603.0	—	
4	474053.0	74.8	20	2	1842.0	1195.0	—	
5	21916.0	54.6	20	1	1835.0	—	—	
6	166824.0	80.5	20	2	1062.0	1368.0	—	
7	310983.0	87.7	20	3	1296.0	1267.0	1344.0	
8	455451.0	86.5	20	3	1172.0	1359.0	1510.0	
9	4035.0	71.9	20	2	1808.0	1733.0	—	
10	148792.0	69.6	20	2	1475.0	1677.0	—	
11	292744.0	99.1	20	3	1825.0	1730.0	1227.0	
12	438416.0	83.2	20	2	1951.0	1043.0	—	
13	583825.0	71.3	20	2	1307.0	1057.0	—	
14	131256.0	50.6	20	1	1809.0	—	—	
15	275812.0	67.9	20	2	1152.0	1792.0	—	
16	421909.0	51.2	20	1	1110.0	—	—	
17	564827.0	89.0	20	3	1050.0	1076.0	1446.0	
18	113244.0	82.0	20	2	1240.0	1316.0	—	
19	258716.0	55.1	20	1	1229.0	—	—	
Type 5 Radar Waveform_4								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	1010855.0	66.4	5	1	1571.0	—	—	
1	1373565.0	72.9	5	2	1273.0	1068.0	—	
2	239025.0	81.7	5	2	1814.0	1217.0	—	
3	601300.0	98.6	5	3	1575.0	1831.0	1582.0	
4	965307.0	73.6	5	2	1354.0	1432.0	—	
5	1325627.0	91.9	5	3	1977.0	1991.0	1976.0	
6	194526.0	60.9	5	1	1314.0	—	—	
7	557324.0	69.3	5	2	1303.0	1840.0	—	

Type 5 Radar Waveform_5								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	668167.0	98.1	9	3	1321.0	1264.0	1629.0	
1	931128.0	93.0	9	3	1970.0	1799.0	1141.0	
2	108905.0	54.0	9	1	1029.0	—	—	
3	372535.0	71.1	9	2	1497.0	1578.0	—	
4	635724.0	85.5	9	3	1186.0	1470.0	1521.0	
5	898985.0	87.7	9	3	1981.0	1119.0	1447.0	
6	76190.0	74.3	9	2	1832.0	1415.0	—	
7	340622.0	53.3	9	1	1202.0	—	—	
8	602982.0	99.5	9	3	1699.0	1116.0	1861.0	
9	869236.0	52.0	9	1	1155.0	—	—	
10	43618.0	85.7	9	3	1651.0	1622.0	1944.0	
Type 5 Radar Waveform_6								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	307268.0	91.3	9	3	1877.0	1082.0	1071.0	
1	572369.0	60.3	9	1	1178.0	—	—	
2	835619.0	68.6	9	2	1478.0	1060.0	—	
3	11190.0	85.8	9	3	1212.0	1757.0	1595.0	
4	274527.0	89.9	9	3	1942.0	1774.0	1385.0	
5	539757.0	65.5	9	1	1292.0	—	—	
6	804005.0	55.1	9	1	1317.0	—	—	
7	1064450.0	89.3	9	3	1645.0	1706.0	1858.0	
8	242213.0	87.9	9	3	1544.0	1901.0	1101.0	
9	506018.0	97.8	9	3	1394.0	1205.0	1245.0	
10	769245.0	96.9	9	3	1109.0	1980.0	1348.0	
Type 5 Radar Waveform_7								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	758186.0	82.3	13	2	1108.0	1266.0	—	
1	153383.0	99.1	13	3	1949.0	1679.0	1987.0	
2	348013.0	55.1	13	1	1100.0	—	—	
3	540558.0	76.7	13	2	1379.0	1511.0	—	
4	733408.0	78.8	13	2	1766.0	1639.0	—	
5	129972.0	72.2	13	2	1892.0	1760.0	—	
6	322716.0	93.9	13	3	1896.0	1070.0	1660.0	
7	516279.0	79.4	13	2	1801.0	1807.0	—	
8	709222.0	97.2	13	3	1158.0	1259.0	1424.0	
9	106267.0	83.0	13	2	1479.0	1529.0	—	
10	298974.0	93.8	13	3	1034.0	1579.0	1961.0	
11	493593.0	61.2	13	1	1820.0	—	—	
12	684846.0	89.6	13	3	1805.0	1350.0	1373.0	
13	82272.0	93.6	13	3	1964.0	1166.0	1666.0	
14	275783.0	67.8	13	2	1598.0	1322.0	—	

Type 5 Radar Waveform_8								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	585860.0	98.5	10	3	1150.0	1519.0	1856.0	
1	830166.0	63.6	10	1	1069.0	—	—	
2	73287.0	95.6	10	3	1067.0	1968.0	1037.0	
3	314816.0	97.1	10	3	1828.0	1258.0	1031.0	
4	555807.0	97.3	10	3	1989.0	1659.0	1440.0	
5	798034.0	68.5	10	2	1953.0	1974.0	—	
6	43529.0	99.3	10	3	1091.0	2000.0	1095.0	
7	285750.0	53.3	10	1	1723.0	—	—	
8	526323.0	90.7	10	3	1523.0	1420.0	1693.0	
9	768009.0	94.9	10	3	1214.0	1289.0	1772.0	
10	13773.0	97.8	10	3	1798.0	1405.0	1483.0	
11	255354.0	87.1	10	3	1315.0	1161.0	1485.0	
Type 5 Radar Waveform_9								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	496757.0	91.8	10	3	1008.0	1995.0	1293.0	
1	739304.0	83.0	10	2	1357.0	1513.0	—	
2	981058.0	68.4	10	2	1492.0	1461.0	—	
3	226138.0	52.6	10	1	1574.0	—	—	
4	467612.0	73.0	10	2	1930.0	1084.0	—	
5	709382.0	71.5	10	2	1146.0	1912.0	—	
6	952732.0	51.1	10	1	1422.0	—	—	
7	196376.0	60.6	10	1	1243.0	—	—	
8	438569.0	55.0	10	1	1328.0	—	—	
9	680374.0	66.0	10	1	1920.0	—	—	
10	923034.0	58.7	10	1	1277.0	—	—	
11	166455.0	58.8	10	1	1743.0	—	—	
Type 5 Radar Waveform_10								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	272187.0	52.0	18	1	1624.0	—	—	
1	433329.0	59.4	18	1	1857.0	—	—	
2	593392.0	70.0	18	2	1494.0	1676.0	—	
3	91107.0	54.8	18	1	1028.0	—	—	
4	252430.0	52.6	18	1	1333.0	—	—	
5	411742.0	97.6	18	3	1927.0	1498.0	1208.0	
6	571665.0	99.1	18	3	1945.0	1437.0	1993.0	
7	71016.0	79.0	18	2	1210.0	1745.0	—	
8	231445.0	92.3	18	3	1609.0	1330.0	1565.0	
9	393080.0	72.0	18	2	1114.0	1634.0	—	
10	553949.0	67.1	18	2	1493.0	1438.0	—	
11	51137.0	91.6	18	3	1326.0	1251.0	1038.0	
12	211452.0	93.7	18	3	1850.0	1412.0	1903.0	
13	372217.0	90.9	18	3	1957.0	1539.0	1083.0	
14	535568.0	50.4	18	1	1132.0	—	—	
15	31332.0	78.4	18	2	1680.0	1862.0	—	
16	192189.0	83.1	18	2	1789.0	1654.0	—	
17	352345.0	95.7	18	3	1941.0	1346.0	1465.0	

Type 5 Radar Waveform_11

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	618722.0	64.4	14	1	1487.0	—	—
1	13857.0	81.9	14	2	1078.0	1347.0	—
2	207207.0	81.1	14	2	1564.0	1197.0	—
3	399325.0	85.2	14	3	1667.0	1662.0	1897.0
4	594896.0	52.1	14	1	1450.0	—	—
5	785884.0	96.5	14	3	1124.0	1439.0	1606.0
6	183309.0	78.8	14	2	1522.0	1590.0	—
7	376189.0	80.4	14	2	1984.0	1956.0	—
8	569999.0	70.7	14	2	1686.0	1218.0	—
9	761818.0	89.8	14	3	1694.0	1587.0	1191.0
10	159034.0	88.5	14	3	1610.0	1917.0	1928.0
11	352872.0	82.9	14	2	1200.0	1691.0	—
12	547405.0	62.8	14	1	1125.0	—	—
13	739194.0	82.4	14	2	1275.0	1967.0	—
14	135952.0	54.8	14	1	1612.0	—	—

Type 5 Radar Waveform_12

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	258864.0	86.7	19	3	1369.0	1979.0	1160.0
1	411035.0	95.1	19	3	1269.0	1365.0	1742.0
2	563617.0	87.8	19	3	1618.0	1239.0	1001.0
3	87990.0	98.5	19	3	1167.0	1810.0	1934.0
4	240014.0	94.4	19	3	1327.0	1535.0	1950.0
5	394099.0	50.7	19	1	1496.0	—	—
6	544361.0	93.2	19	3	1534.0	1728.0	1175.0
7	69274.0	95.8	19	3	1962.0	1335.0	1560.0
8	221741.0	68.7	19	2	1689.0	1846.0	—
9	374045.0	94.9	19	3	1457.0	1087.0	1019.0
10	526868.0	69.7	19	2	1032.0	1923.0	—
11	50786.0	65.9	19	1	1946.0	—	—
12	203287.0	76.8	19	2	1004.0	1576.0	—
13	356398.0	58.9	19	1	1592.0	—	—
14	507663.0	82.1	19	2	1794.0	1687.0	—
15	31925.0	71.0	19	2	1435.0	1531.0	—
16	184199.0	72.8	19	2	1768.0	1824.0	—
17	336341.0	77.6	19	2	1904.0	1996.0	—
18	490754.0	59.4	19	1	1098.0	—	—

Type 5 Radar Waveform_13

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	17895.0	51.6	12	1	1386.0	—	—
1	224888.0	76.9	12	2	1843.0	1649.0	—
2	432147.0	77.8	12	2	1763.0	1291.0	—
3	639620.0	66.9	12	2	1477.0	1136.0	—
4	847862.0	57.3	12	1	1613.0	—	—
5	199404.0	73.6	12	2	1784.0	1631.0	—
6	406491.0	76.1	12	2	1756.0	1593.0	—
7	613516.0	72.3	12	2	1429.0	1985.0	—
8	821491.0	76.8	12	2	1341.0	1117.0	—
9	174316.0	59.3	12	1	1371.0	—	—
10	380238.0	90.6	12	3	1873.0	1735.0	1414.0
11	589362.0	59.3	12	1	1454.0	—	—
12	797154.0	59.2	12	1	1174.0	—	—
13	148141.0	84.8	12	3	1948.0	1552.0	1374.0

Type 5 Radar Waveform_14

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	247730.0	86.8	20	3	1816.0	1360.0	1822.0
1	394666.0	56.9	20	1	1007.0	-	-
2	537277.0	95.9	20	3	1387.0	1526.0	1049.0
3	86134.0	62.7	20	1	1620.0	-	-
4	230420.0	79.9	20	2	1795.0	2000.0	-
5	374312.0	88.7	20	3	1220.0	1871.0	1827.0
6	518435.0	95.0	20	3	1971.0	1242.0	1938.0
7	68091.0	71.3	20	2	1806.0	1276.0	-
8	212404.0	86.1	20	3	1430.0	1090.0	1847.0
9	358697.0	62.4	20	1	1308.0	-	-
10	501485.0	90.3	20	3	1298.0	1625.0	1252.0
11	50295.0	82.4	20	2	1207.0	1443.0	-
12	195215.0	80.5	20	2	1481.0	1036.0	-
13	340510.0	51.9	20	1	1838.0	-	-
14	484981.0	71.4	20	2	1349.0	1230.0	-
15	32333.0	88.7	20	3	1074.0	1852.0	1880.0
16	177186.0	68.8	20	2	1137.0	1983.0	-
17	323032.0	65.6	20	1	1111.0	-	-
18	468267.0	55.3	20	1	1129.0	-	-
19	14627.0	53.4	20	1	1718.0	-	-

Type 5 Radar Waveform_15

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	212699.0	80.8	13	2	1958.0	1358.0	-
1	405832.0	77.9	13	2	1914.0	1573.0	-
2	600540.0	58.9	13	1	1455.0	-	-
3	793148.0	78.1	13	2	1505.0	1020.0	-
4	188776.0	80.4	13	2	1910.0	1922.0	-
5	382166.0	74.9	13	2	1623.0	1594.0	-
6	575090.0	68.2	13	2	1833.0	1830.0	-
7	769386.0	78.4	13	2	1286.0	1176.0	-
8	165558.0	66.3	13	1	1096.0	-	-
9	357611.0	86.5	13	3	1750.0	1765.0	1375.0
10	552166.0	78.1	13	2	1265.0	1147.0	-
11	744485.0	85.5	13	3	1216.0	1061.0	1334.0
12	141577.0	60.5	13	1	1740.0	-	-
13	334368.0	81.2	13	2	1759.0	1916.0	-
14	526578.0	90.1	13	3	1925.0	1738.0	1406.0

Type 5 Radar Waveform_16								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	570431.0	52.0	19	1	1234.0	—	—
	1	92580.0	86.3	19	3	1153.0	1596.0	1092.0
	2	245565.0	58.3	19	1	1947.0	—	—
	3	396412.0	93.0	19	3	1353.0	1802.0	1731.0
	4	547996.0	88.9	19	3	1617.0	1999.0	1737.0
	5	74096.0	64.4	19	1	1557.0	—	—
	6	226338.0	80.4	19	2	1786.0	1320.0	—
	7	377507.0	90.9	19	3	1705.0	1715.0	1769.0
	8	532280.0	65.4	19	1	1813.0	—	—
	9	55204.0	76.6	19	2	1203.0	1159.0	—
	10	207628.0	75.0	19	2	1428.0	1482.0	—
	11	358969.0	93.1	19	3	1299.0	1884.0	1700.0
	12	512622.0	74.2	19	2	1145.0	1703.0	—
	13	36454.0	50.8	19	1	1532.0	—	—
	14	188380.0	88.2	19	3	1537.0	1256.0	1671.0
	15	340576.0	90.5	19	3	1268.0	1398.0	1611.0
	16	494217.0	75.0	19	2	1121.0	1246.0	—
	17	17646.0	54.0	19	1	1025.0	—	—
	18	170460.0	55.8	19	1	1452.0	—	—
Type 5 Radar Waveform_17								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	472998.0	54.0	12	1	1140.0	—	—
	1	696490.0	58.8	12	1	1281.0	—	—
	2	917409.0	98.1	12	3	1417.0	1201.0	1313.0
	3	221449.0	67.7	12	2	1451.0	1383.0	—
	4	444458.0	82.3	12	2	1721.0	1484.0	—
	5	669048.0	54.9	12	1	1148.0	—	—
	6	890761.0	70.4	12	2	1749.0	1345.0	—
	7	194134.0	66.5	12	1	1997.0	—	—
	8	417745.0	54.9	12	1	1512.0	—	—
	9	639463.0	99.6	12	3	1077.0	1231.0	1777.0
	10	862178.0	84.3	12	3	1226.0	1683.0	1356.0
	11	166657.0	54.7	12	1	1776.0	—	—
	12	389626.0	71.9	12	2	1033.0	1867.0	—

Type 5 Radar Waveform_18								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	417628.0	99.4	19	3	1872.0	1469.0	1128.0
	1	572713.0	61.8	19	1	1177.0	—	—
	2	95055.0	69.4	19	2	1097.0	1058.0	—
	3	248146.0	52.3	19	1	1048.0	—	—
	4	401054.0	60.4	19	1	1073.0	—	—
	5	552282.0	72.7	19	2	1907.0	1088.0	—
	6	76303.0	66.5	19	1	1732.0	—	—
	7	228179.0	89.0	19	3	1248.0	1225.0	1684.0
	8	382107.0	50.3	19	1	1255.0	—	—
	9	531769.0	87.1	19	3	1312.0	1844.0	1883.0
	10	57276.0	93.6	19	3	1044.0	1770.0	1221.0
	11	210444.0	51.5	19	1	1134.0	—	—
	12	363009.0	55.4	19	1	1719.0	—	—
	13	514062.0	81.9	19	2	1894.0	1911.0	—
	14	38501.0	94.1	19	3	1863.0	1324.0	1297.0
	15	191100.0	77.6	19	2	1619.0	1193.0	—
	16	343957.0	78.1	19	2	1012.0	1139.0	—
	17	494135.0	96.0	19	3	1860.0	1567.0	1864.0
	18	19851.0	53.1	19	1	1818.0	—	—
Type 5 Radar Waveform_19								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	172312.0	81.5	18	2	1127.0	1697.0	—
	1	325652.0	54.7	18	1	1184.0	—	—
	2	477536.0	77.1	18	2	1023.0	1488.0	—
	3	1037.0	81.3	18	2	1182.0	1183.0	—
	4	153866.0	53.9	18	1	1442.0	—	—
	5	306022.0	68.5	18	2	1783.0	1041.0	—
	6	458558.0	76.0	18	2	1569.0	1196.0	—
	7	609529.0	88.0	18	3	1632.0	1489.0	1224.0
	8	134685.0	68.4	18	2	1319.0	1788.0	—
	9	286249.0	98.0	18	3	1486.0	1711.0	1791.0
	10	439678.0	75.4	18	2	1257.0	1642.0	—
	11	590357.0	91.3	18	3	1337.0	1800.0	1669.0
	12	115971.0	81.1	18	2	1051.0	1724.0	—
	13	268714.0	71.9	18	2	1052.0	1165.0	—
	14	421580.0	53.1	18	1	1879.0	—	—
	15	572493.0	93.7	18	3	1459.0	1223.0	1180.0
	16	97357.0	62.4	18	1	1664.0	—	—
	17	249428.0	81.5	18	2	1960.0	1476.0	—
	18	401141.0	85.9	18	3	1716.0	1458.0	1249.0

Type 5 Radar Waveform_20								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	658934.0	80.1	15	2	1670.0	1366.0	—	
1	93314.0	52.3	15	1	1584.0	—	—	
2	273689.0	87.5	15	3	1507.0	1685.0	1495.0	
3	455761.0	66.8	15	2	1466.0	1072.0	—	
4	637675.0	53.6	15	1	1797.0	—	—	
5	70892.0	71.8	15	2	1219.0	1035.0	—	
6	252449.0	54.4	15	1	1646.0	—	—	
7	433871.0	66.2	15	1	1779.0	—	—	
8	614419.0	76.9	15	2	1597.0	1300.0	—	
9	48467.0	73.0	15	2	1648.0	1940.0	—	
10	229629.0	76.4	15	2	1672.0	1480.0	—	
11	409897.0	89.0	15	3	1515.0	1445.0	1767.0	
12	591947.0	76.9	15	2	1503.0	1586.0	—	
13	26255.0	53.5	15	1	1107.0	—	—	
14	207209.0	81.2	15	2	1720.0	1823.0	—	
15	388710.0	73.2	15	2	1409.0	1247.0	—	
Type 5 Radar Waveform_21								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	607789.0	67.2	13	2	1272.0	1787.0	—	
1	4132.0	72.3	13	2	1546.0	1464.0	—	
2	197291.0	80.5	13	2	1853.0	1704.0	—	
3	391239.0	65.4	13	1	1955.0	—	—	
4	583356.0	83.8	13	3	1380.0	1364.0	1168.0	
5	775502.0	84.4	13	3	1130.0	1755.0	1982.0	
6	173273.0	84.7	13	3	1563.0	1520.0	1509.0	
7	365880.0	98.1	13	3	1972.0	1726.0	1556.0	
8	558658.0	91.1	13	3	1588.0	1708.0	1918.0	
9	753519.0	75.0	13	2	1615.0	1378.0	—	
10	149643.0	95.8	13	3	1533.0	1288.0	1064.0	
11	343675.0	62.5	13	1	1682.0	—	—	
12	536800.0	79.7	13	2	1244.0	1169.0	—	
13	731221.0	52.2	13	1	1342.0	—	—	
14	125742.0	88.3	13	3	1811.0	1559.0	1261.0	
Type 5 Radar Waveform_22								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	435566.0	81.7	9	2	1978.0	1712.0	—	
1	698811.0	96.2	9	3	1188.0	1876.0	1311.0	
2	962761.0	92.3	9	3	1282.0	1105.0	1501.0	
3	139689.0	65.9	9	1	1444.0	—	—	
4	403754.0	50.7	9	1	1889.0	—	—	
5	666255.0	94.1	9	3	1123.0	1542.0	1868.0	
6	929477.0	87.9	9	3	1965.0	1551.0	1318.0	
7	106947.0	73.5	9	2	1902.0	1530.0	—	
8	371459.0	59.4	9	1	1189.0	—	—	
9	633668.0	99.6	9	3	1340.0	1665.0	1753.0	
10	899443.0	52.3	9	1	1915.0	—	—	

Type 5 Radar Waveform_23

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	62848.0	99.2	11	3	1748.0	1605.0	1829.0
1	286764.0	64.9	11	1	1009.0	—	—
2	508545.0	92.0	11	3	1781.0	1558.0	1011.0
3	733462.0	58.9	11	1	1717.0	—	—
4	35432.0	98.6	11	3	1138.0	1988.0	1906.0
5	258048.0	87.7	11	3	1992.0	1796.0	1382.0
6	480693.0	99.9	11	3	1633.0	1561.0	1932.0
7	703452.0	98.7	11	3	1817.0	1397.0	1746.0
8	8018.0	86.0	11	3	1384.0	1006.0	1274.0
9	231120.0	71.4	11	2	1305.0	1900.0	—
10	454652.0	81.9	11	2	1156.0	1171.0	—
11	678687.0	66.0	11	1	1343.0	—	—
12	901854.0	52.0	11	1	1734.0	—	—

Type 5 Radar Waveform_24

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	220232.0	95.7	10	3	1727.0	1785.0	1663.0
1	462877.0	67.6	10	2	1027.0	1199.0	—
2	702922.0	89.4	10	3	1589.0	1886.0	1506.0
3	946092.0	75.8	10	2	1181.0	1854.0	—
4	191013.0	78.6	10	2	1549.0	1016.0	—
5	432553.0	76.1	10	2	1866.0	1548.0	—
6	673708.0	92.0	10	3	1279.0	1841.0	1106.0
7	915660.0	86.6	10	3	1194.0	1122.0	1425.0
8	161275.0	74.6	10	2	1173.0	1021.0	—
9	402448.0	84.8	10	3	1262.0	1280.0	1695.0
10	643925.0	94.8	10	3	1237.0	1381.0	1661.0
11	885178.0	92.9	10	3	1780.0	1270.0	1500.0

Type 5 Radar Waveform_25

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	143078.0	84.6	9	3	1909.0	1621.0	1441.0
1	406447.0	87.7	9	3	1758.0	1674.0	1554.0
2	670819.0	80.4	9	2	1790.0	1572.0	—
3	935235.0	79.2	9	2	1400.0	1204.0	—
4	110826.0	79.3	9	2	1804.0	1302.0	—
5	374171.0	98.8	9	3	1472.0	1135.0	1898.0
6	638318.0	71.0	9	2	1744.0	1638.0	—
7	903925.0	65.9	9	1	1154.0	—	—
8	78318.0	81.4	9	2	1570.0	1692.0	—
9	341614.0	85.2	9	3	1762.0	1875.0	1190.0
10	606244.0	69.7	9	2	1022.0	1614.0	—

Type 5 Radar Waveform_26

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	684380.0	56.0	13	1	1241.0	—	—
1	36014.0	82.1	13	2	1063.0	1294.0	—
2	243276.0	76.5	13	2	1005.0	1528.0	—
3	450890.0	58.0	13	1	1881.0	—	—
4	658737.0	62.6	13	1	1336.0	—	—
5	10463.0	81.0	13	2	1601.0	1935.0	—
6	217904.0	66.3	13	1	1913.0	—	—
7	424803.0	66.9	13	2	1870.0	1089.0	—
8	630539.0	99.8	13	3	1668.0	1657.0	1568.0
9	838901.0	80.1	13	2	1963.0	1236.0	—
10	191870.0	90.2	13	3	1602.0	1040.0	1423.0
11	399170.0	70.3	13	2	1855.0	1351.0	—
12	606542.0	83.2	13	2	1399.0	1433.0	—
13	814555.0	54.6	13	1	1975.0	—	—

Type 5 Radar Waveform_27

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	129819.0	62.0	18	1	1066.0	—	—
1	289929.0	95.0	18	3	1436.0	1448.0	1198.0
2	450675.0	83.4	18	3	1170.0	1508.0	1332.0
3	613419.0	57.5	18	1	1812.0	—	—
4	109793.0	65.8	18	1	1924.0	—	—
5	270820.0	74.6	18	2	1401.0	1000.0	—
6	431291.0	80.2	18	2	1391.0	1986.0	—
7	591267.0	97.3	18	3	1085.0	1301.0	1990.0
8	90031.0	66.1	18	1	1211.0	—	—
9	251222.0	63.9	18	1	1747.0	—	—
10	412616.0	50.0	18	1	1538.0	—	—
11	572623.0	69.4	18	2	1583.0	1471.0	—
12	69909.0	69.4	18	2	1599.0	1905.0	—
13	231285.0	56.6	18	1	1959.0	—	—
14	391696.0	72.6	18	2	1543.0	1773.0	—
15	554170.0	60.8	18	1	1407.0	—	—
16	50277.0	50.0	18	1	1126.0	—	—
17	211300.0	70.6	18	2	1355.0	1002.0	—

Type 5 Radar Waveform_28

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	671769.0	60.4	7	1	1710.0	—	—
1	959527.0	98.0	7	3	1890.0	1954.0	1434.0
2	54643.0	83.3	7	2	1616.0	1888.0	—
3	344730.0	93.7	7	3	1460.0	1054.0	1339.0
4	636151.0	52.1	7	1	1370.0	—	—
5	925406.0	68.0	7	2	1591.0	1655.0	—
6	18904.0	79.4	7	2	1939.0	1185.0	—
7	309639.0	55.5	7	1	1362.0	—	—
8	600276.0	58.3	7	1	1504.0	—	—
9	890042.0	67.9	7	2	1222.0	1502.0	—

Type 5 Radar Waveform_29								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	980935.0	95.0	10	3	1404.0	1754.0	1899.0	
1	228052.0	62.7	10	1	1751.0	—	—	
2	468708.0	94.4	10	3	1834.0	1295.0	1702.0	
3	711051.0	67.4	10	2	1517.0	1937.0	—	
4	951874.0	97.3	10	3	1580.0	1055.0	1729.0	
5	198162.0	74.6	10	2	1014.0	1079.0	—	
6	439834.0	67.2	10	2	1306.0	1585.0	—	
7	682834.0	53.8	10	1	1179.0	—	—	
8	922302.0	87.7	10	3	1253.0	1363.0	1562.0	
9	168446.0	58.4	10	1	1527.0	—	—	
10	410445.0	65.6	10	1	1921.0	—	—	
11	652866.0	60.6	10	1	1376.0	—	—	



Radar Type 6 - Radar Statistical Performance			
Trail #	1=Detection 0=No Detection	Trail #	1=Detection 0=No Detection
0	1	15	1
1	1	16	1
2	1	17	1
3	1	18	1
4	1	19	1
5	1	20	1
6	1	21	1
7	1	22	1
8	1	23	1
9	1	24	1
10	1	25	1
11	1	26	1
12	1	27	1
13	1	28	1
14	1	29	1
Detection Percentage (%)		100%	

Type 6 Radar Waveform_0

Frequency List (MHz)	0	1	2	3	4
0	5421	5442	5338	5588	5388
5	5538	5563	5401	5501	5375
10	5565	5417	5722	5559	5480
15	5313	5309	5535	5425	5268
20	5683	5461	5276	5531	5323
25	5494	5270	5402	5451	5607
30	5470	5703	5359	5527	5420
35	5664	5272	5680	5298	5513
40	5574	5606	5348	5708	5642
45	5358	5250	5542	5333	5718
50	5266	5503	5446	5463	5706
55	5312	5307	5412	5391	5640
60	5724	5397	5590	5656	5587
65	5308	5445	5389	5638	5291
70	5354	5487	5637	5516	5327
75	5460	5293	5711	5591	5453
80	5416	5555	5688	5314	5507
85	5646	5536	5602	5690	5615
90	5254	5695	5575	5556	5580
95	5399	5305	5530	5500	5677

Type 6 Radar Waveform_1

Frequency List (MHz)	0	1	2	3	4
0	5579	5681	5274	5652	5705
5	5677	5585	5476	5664	5582
10	5710	5354	5458	5442	5580
15	5568	5343	5412	5483	5617
20	5654	5277	5499	5365	5504
25	5686	5346	5376	5603	5485
30	5649	5359	5660	5574	5301
35	5715	5706	5363	5573	5451
40	5524	5413	5311	5286	5473
45	5639	5287	5625	5294	5296
50	5531	5282	5622	5586	5552
55	5529	5256	5495	5366	5581
60	5459	5695	5429	5280	5601
65	5516	5488	5590	5587	5327
70	5661	5440	5588	5313	5463
75	5687	5271	5559	5536	5465
80	5424	5288	5713	5474	5533
85	5322	5690	5457	5692	5315
90	5540	5607	5353	5597	5470
95	5403	5467	5285	5694	5250

Type 6 Radar Waveform_2

Frequency List (MHz)	0	1	2	3	4
0	5359	5445	5685	5338	5450
5	5719	5510	5551	5352	5411
10	5641	5618	5499	5637	5601
15	5559	5470	5515	5528	5334
20	5662	5443	5440	5357	5477
25	5295	5579	5707	5519	5691
30	5345	5617	5692	5453	5438
35	5370	5454	5369	5701	5252
40	5394	5699	5713	5636	5594
45	5708	5349	5418	5633	5323
50	5263	5578	5683	5320	5674
55	5656	5666	5558	5643	5348
60	5532	5434	5413	5536	5363
65	5396	5649	5621	5660	5563
70	5466	5663	5608	5432	5693
75	5605	5517	5620	5437	5544
80	5402	5537	5433	5593	5277
85	5507	5408	5561	5504	5417
90	5635	5409	5501	5642	5638
95	5711	5272	5331	5427	5702

Type 6 Radar Waveform_3

Frequency List (MHz)	0	1	2	3	4
0	5614	5684	5621	5499	5292
5	5286	5532	5626	5418	5618
10	5572	5407	5540	5260	5622
15	5647	5597	5521	5573	5526
20	5670	5609	5381	5446	5450
25	5365	5307	5336	5553	5355
30	5709	5574	5432	5702	5258
35	5509	5545	5640	5379	5352
40	5566	5477	5637	5633	5523
45	5568	5316	5410	5305	5683
50	5688	5522	5299	5652	5389
55	5475	5687	5610	5588	5655
60	5358	5380	5485	5302	5703
65	5444	5424	5354	5382	5315
70	5639	5567	5304	5338	5273
75	5498	5397	5547	5325	5600
80	5430	5712	5496	5713	5715
85	5699	5373	5612	5277	5615
90	5415	5535	5427	5650	5350
95	5327	5681	5695	5334	5554

Type 6 Radar Waveform_4						
Frequency List (MHz)	0	1	2	3	4	
0	5394	5448	5557	5660	5512	
5	5328	5457	5701	5581	5350	
10	5406	5293	5455	5643	5260	
15	5724	5624	5618	5718	5678	
20	5322	5438	5423	5253	5571	
25	5510	5440	5587	5397	5695	
30	5531	5647	5379	5553	5551	
35	5636	5533	5532	5363	5502	
40	5657	5575	5621	5630	5452	
45	5548	5399	5371	5358	5570	
50	5385	5675	5264	5441	5376	
55	5369	5487	5606	5579	5294	
60	5511	5341	5300	5281	5340	
65	5434	5338	5336	5702	5426	
70	5368	5569	5542	5518	5526	
75	5273	5458	5319	5479	5649	
80	5255	5285	5427	5529	5496	
85	5652	5716	5566	5525	5435	
90	5393	5421	5472	5309	5284	
95	5367	5382	5299	5698	5563	
Type 6 Radar Waveform_5						
Frequency List (MHz)	0	1	2	3	4	
0	5552	5687	5493	5346	5354	
5	5467	5479	5301	5269	5654	
10	5337	5557	5622	5650	5664	
15	5348	5376	5252	5566	5435	
20	5589	5369	5360	5527	5396	
25	5519	5423	5713	5641	5621	
30	5439	5584	5488	5387	5628	
35	5276	5690	5349	5329	5307	
40	5277	5341	5265	5416	5386	
45	5724	5284	5528	5482	5429	
50	5411	5639	5315	5530	5674	
55	5313	5675	5560	5294	5588	
60	5470	5465	5478	5582	5638	
65	5383	5270	5606	5505	5595	
70	5669	5391	5494	5485	5620	
75	5481	5462	5460	5426	5670	
80	5459	5322	5424	5399	5263	
85	5511	5681	5617	5298	5633	
90	5558	5524	5506	5569	5393	
95	5384	5437	5380	5596	5542	

Type 6 Radar Waveform_6					
Frequency List (MHz)	0	1	2	3	4
0	5332	5451	5429	5507	5574
5	5509	5404	5376	5432	5386
10	5646	5346	5663	5370	5685
15	5339	5406	5355	5611	5627
20	5597	5438	5301	5519	5369
25	5407	5275	5344	5270	5655
30	5578	5473	5445	5505	5305
35	5571	5354	5440	5600	5460
40	5666	5348	5626	5721	5688
45	5508	5565	5487	5464	5722
50	5515	5552	5366	5619	5497
55	5635	5388	5514	5484	5310
60	5453	5502	5630	5520	5723
65	5408	5315	5364	5313	5480
70	5401	5308	5667	5437	5672
75	5715	5470	5444	5589	5601
80	5441	5678	5486	5411	5421
85	5302	5336	5323	5606	5549
90	5546	5530	5443	5405	5492
95	5591	5424	5529	5550	5267

Type 6 Radar Waveform_7					
Frequency List (MHz)	0	1	2	3	4
0	5587	5690	5365	5668	5416
5	5551	5426	5451	5595	5593
10	5577	5610	5704	5565	5706
15	5427	5533	5458	5656	5441
20	5605	5604	5717	5608	5342
25	5673	5699	5547	5374	5689
30	5620	5459	5402	5720	5554
35	5294	5493	5531	5396	5613
40	5677	5494	5431	5292	5718
45	5520	5488	5648	5545	5517
50	5512	5391	5253	5417	5330
55	5698	5579	5576	5468	5674
60	5327	5631	5320	5465	5555
65	5331	5261	5662	5281	5349
70	5312	5293	5586	5361	5423
75	5297	5564	5446	5403	5558
80	5721	5651	5519	5358	5318
85	5496	5650	5474	5321	5639
90	5302	5275	5286	5323	5514
95	5622	5319	5413	5536	5477

Type 6 Radar Waveform_8						
Frequency List (MHz)	0	1	2	3	4	
0	5367	5454	5301	5257	5636	
5	5593	5351	5526	5661	5422	
10	5508	5399	5663	5252	5515	
15	5660	5464	5604	5633	5516	
20	5673	5280	5600	5315	5561	
25	5551	5275	5478	5723	5662	
30	5348	5359	5460	5706	5589	
35	5535	5622	5289	5388	5591	
40	5430	5611	5705	5534	5715	
45	5449	5468	5256	5506	5570	
50	5645	5429	5419	5521	5426	
55	5389	5423	5298	5285	5485	
60	5410	5387	5632	5304	5288	
65	5522	5563	5292	5433	5409	
70	5300	5413	5362	5366	5319	
75	5500	5610	5428	5277	5339	
80	5634	5318	5680	5592	5724	
85	5382	5576	5567	5374	5578	
90	5542	5414	5623	5532	5602	
95	5260	5471	5360	5310	5684	
Type 6 Radar Waveform_9						
Frequency List (MHz)	0	1	2	3	4	
0	5622	5693	5712	5418	5478	
5	5257	5373	5601	5349	5629	
10	5342	5285	5408	5383	5273	
15	5603	5312	5567	5649	5350	
20	5524	5364	5696	5689	5288	
25	5352	5500	5582	5282	5326	
30	5316	5675	5480	5674	5713	
35	5560	5541	5505	5269	5694	
40	5643	5299	5378	5351	5339	
45	5564	5526	5664	5521	5605	
50	5519	5508	5344	5370	5477	
55	5376	5482	5717	5414	5650	
60	5355	5555	5250	5686	5654	
65	5324	5354	5455	5570	5602	
70	5395	5400	5640	5398	5321	
75	5399	5389	5365	5481	5387	
80	5538	5533	5406	5697	5315	
85	5651	5583	5434	5309	5610	
90	5627	5718	5669	5268	5645	
95	5448	5475	5635	5549	5657	

Type 6 Radar Waveform_10					
Frequency List (MHz)	0	1	2	3	4
0	5305	5457	5648	5579	5698
5	5299	5298	5676	5512	5361
10	5273	5549	5449	5578	5294
15	5594	5439	5670	5694	5542
20	5532	5433	5637	5681	5261
25	5715	5352	5308	5316	5368
30	5318	5632	5607	5338	5426
35	5356	5419	5583	5302	5581
40	5539	5709	5685	5331	5422
45	5622	5551	5397	5306	5570
50	5597	5642	5692	5568	5330
55	5672	5543	5340	5623	5381
60	5671	5412	5603	5360	5564
65	5250	5373	5674	5478	5403
70	5489	5277	5280	5271	5509
75	5508	5462	5639	5314	5285
80	5312	5371	5272	5327	5690
85	5491	5392	5651	5385	5260
90	5269	5566	5712	5658	5621
95	5466	5550	5541	5300	5655

Type 6 Radar Waveform_11					
Frequency List (MHz)	0	1	2	3	4
0	5560	5696	5584	5265	5540
5	5341	5320	5276	5675	5665
10	5679	5338	5490	5298	5315
15	5682	5469	5264	5259	5443
20	5599	5295	5709	5506	5409
25	5412	5350	5410	5587	5705
30	5533	5406	5427	5380	5517
35	5724	5430	5422	5385	5519
40	5328	5614	5311	5505	5583
45	5632	5273	5482	5621	5308
50	5368	5636	5281	5284	5387
55	5258	5589	5672	5342	5455
60	5714	5613	5552	5299	5396
65	5617	5651	5271	5464	5503
70	5253	5715	5629	5554	5416
75	5661	5570	5445	5309	5566
80	5486	5690	5332	5558	5535
85	5687	5598	5657	5419	5292
90	5478	5556	5600	5569	5645
95	5278	5494	5354	5382	5479

Type 6 Radar Waveform_12					
Frequency List (MHz)	0	1	2	3	4
0	5340	5557	5520	5426	5285
5	5383	5720	5351	5266	5397
10	5513	5602	5531	5493	5336
15	5295	5596	5401	5687	5451
20	5290	5616	5287	5682	5394
25	5628	5515	5516	5384	5549
30	5573	5662	5273	5558	5625
35	5519	5608	5622	5344	5261
40	5565	5360	5447	5325	5446
45	5291	5588	5641	5685	5703
50	5527	5658	5672	5666	5483
55	5469	5713	5577	5552	5560
60	5704	5670	5605	5660	5436
65	5501	5335	5606	5412	5454
70	5440	5450	5506	5673	5587
75	5274	5697	5424	5668	5296
80	5423	5508	5306	5286	5389
85	5629	5614	5523	5586	5512
90	5410	5288	5663	5453	5499
95	5390	5347	5462	5551	5482
Type 6 Radar Waveform_13					
Frequency List (MHz)	0	1	2	3	4
0	5595	5321	5456	5587	5602
5	5522	5267	5426	5429	5604
10	5444	5391	5572	5591	5357
15	5383	5723	5407	5257	5643
20	5459	5359	5557	5376	5655
25	5282	5480	5718	5620	5462
30	5619	5488	5332	5445	5658
35	5699	5316	5300	5258	5672
40	5648	5298	5687	5322	5375
45	5271	5671	5263	5493	5403
50	5486	5489	5427	5657	5667
55	5292	5274	5531	5358	5360
60	5329	5594	5431	5606	5637
65	5450	5438	5682	5635	5512
70	5533	5509	5414	5680	5632
75	5556	5394	5268	5405	5348
80	5309	5607	5490	5571	5681
85	5481	5389	5471	5355	5331
90	5540	5285	5705	5453	5669
95	5390	5284	5499	5714	5402

Type 6 Radar Waveform_14						
Frequency List (MHz)	0	1	2	3	4	
0	5278	5560	5392	5273	5347	
5	5564	5667	5501	5592	5433	
10	5375	5277	5613	5311	5378	
15	5471	5510	5302	5360	5370	
20	5525	5595	5368	5628	5548	
25	5429	5446	5346	5355	5633	
30	5351	5576	5606	5484	5643	
35	5322	5315	5587	5550	5269	
40	5511	5256	5711	5452	5319	
45	5304	5251	5279	5660	5316	
50	5283	5438	5299	5575	5312	
55	5274	5621	5482	5568	5502	
60	5487	5426	5257	5649	5460	
65	5399	5310	5648	5574	5681	
70	5519	5609	5263	5656	5591	
75	5428	5417	5411	5386	5600	
80	5419	5388	5654	5634	5678	
85	5298	5292	5313	5318	5356	
90	5533	5618	5297	5424	5641	
95	5457	5527	5440	5403	5358	
Type 6 Radar Waveform_15						
Frequency List (MHz)	0	1	2	3	4	
0	5533	5324	5328	5434	5664	
5	5606	5689	5576	5280	5640	
10	5684	5541	5654	5506	5399	
15	5462	5502	5613	5347	5649	
20	5378	5594	5536	5457	5601	
25	5436	5281	5450	5389	5675	
30	5337	5346	5258	5463	5364	
35	5406	5480	5703	5658	5350	
40	5595	5316	5611	5609	5362	
45	5718	5272	5645	5630	5614	
50	5286	5513	5693	5558	5575	
55	5672	5387	5376	5616	5690	
60	5694	5355	5655	5661	5348	
65	5369	5716	5278	5505	5612	
70	5587	5632	5550	5397	5537	
75	5367	5377	5529	5644	5343	
80	5319	5493	5670	5252	5618	
85	5699	5545	5306	5723	5308	
90	5303	5361	5426	5620	5273	
95	5512	5511	5720	5322	5356	

Type 6 Radar Waveform_16						
Frequency List (MHz)	0	1	2	3	4	
0	5313	5563	5264	5498	5409	
5	5648	5711	5651	5346	5372	
10	5615	5330	5317	5701	5420	
15	5550	5532	5716	5295	5366	
20	5386	5285	5477	5449	5574	
25	5702	5608	5377	5554	5423	
30	5339	5490	5561	5410	5661	
35	5503	5594	5276	5381	5572	
40	5664	5519	5587	5360	5540	
45	5589	5445	5301	5325	5435	
50	5315	5401	5375	5336	5649	
55	5432	5387	5681	5347	5270	
60	5380	5639	5662	5481	5541	
65	5484	5297	5690	5261	5447	
70	5491	5712	5436	5511	5509	
75	5657	5600	5629	5542	5425	
80	5507	5382	5672	5688	5670	
85	5569	5341	5713	5596	5446	
90	5473	5309	5395	5308	5254	
95	5567	5495	5618	5609	5451	
Type 6 Radar Waveform_17						
Frequency List (MHz)	0	1	2	3	4	
0	5568	5327	5675	5659	5251	
5	5312	5636	5509	5579	5449	
10	5594	5358	5421	5441	5638	
15	5344	5340	5558	5297	5354	
20	5418	5538	5547	5590	5557	
25	5483	5658	5457	5381	5447	
30	5301	5481	5642	5685	5631	
35	5583	5600	5602	5525	5407	
40	5372	5569	5528	5262	5378	
45	5322	5285	5491	5452	5464	
50	5634	5484	5362	5386	5480	
55	5403	5318	5302	5545	5681	
60	5494	5404	5487	5343	5321	
65	5522	5531	5519	5574	5715	
70	5468	5713	5268	5426	5406	
75	5652	5445	5669	5408	5573	
80	5411	5401	5430	5532	5550	
85	5705	5266	5315	5332	5665	
90	5622	5576	5516	5712	5644	
95	5546	5697	5265	5589	5448	

Type 6 Radar Waveform_18						
Frequency List (MHz)	0	1	2	3	4	
0	5251	5566	5611	5345	5471	
5	5354	5658	5326	5672	5408	
10	5380	5383	5399	5519	5462	
15	5311	5350	5385	5275	5305	
20	5520	5456	5530	5617	5381	
25	5409	5686	5384	5491	5423	
30	5576	5404	5419	5336	5679	
35	5684	5301	5440	5309	5497	
40	5439	5685	5463	5268	5549	
45	5320	5431	5587	5636	5667	
50	5503	5553	5457	5331	5550	
55	5340	5670	5697	5289	5710	
60	5626	5705	5508	5292	5260	
65	5257	5688	5560	5512	5427	
70	5682	5325	5314	5407	5561	
75	5665	5263	5569	5700	5476	
80	5364	5622	5601	5478	5464	
85	5328	5418	5366	5450	5375	
90	5421	5677	5414	5637	5367	
95	5641	5434	5335	5371	5692	
Type 6 Radar Waveform_19						
Frequency List (MHz)	0	1	2	3	4	
0	5506	5330	5547	5313	5396	
5	5583	5401	5360	5615	5311	
10	5269	5440	5714	5483	5717	
15	5438	5453	5333	5467	5589	
20	5397	5619	5590	5358	5414	
25	5488	5525	5562	5465	5361	
30	5634	5585	5499	5348	5392	
35	5711	5462	5411	5278	5390	
40	5508	5705	5529	5694	5378	
45	5484	5474	5512	5368	5554	
50	5642	5658	5275	5263	5294	
55	5385	5516	5638	5560	5400	
60	5571	5255	5531	5476	5709	
65	5716	5296	5564	5693	5306	
70	5285	5546	5343	5439	5386	
75	5445	5457	5388	5338	5300	
80	5718	5427	5668	5566	5420	
85	5667	5424	5365	5555	5251	
90	5662	5493	5303	5332	5257	
95	5544	5409	5519	5443	5639	

Type 6 Radar Waveform_20					
Frequency List (MHz)	0	1	2	3	4
0	5286	5569	5483	5667	5533
5	5438	5605	5476	5426	5347
10	5620	5481	5434	5504	5330
15	5565	5556	5378	5659	5699
20	5280	5338	5611	5563	5632
25	5685	5617	5592	5559	5604
30	5354	5696	5374	5262	5319
35	5487	5507	5615	5422	5473
40	5717	5273	5398	5537	5509
45	5302	5339	5264	5291	5544
50	5353	5597	5451	5723	5575
55	5713	5609	5689	5516	5562
60	5454	5435	5665	5332	5299
65	5488	5584	5532	5346	5415
70	5345	5523	5503	5369	5590
75	5410	5499	5591	5256	5379
80	5606	5387	5482	5658	5430
85	5337	5496	5552	5312	5625
90	5307	5498	5546	5385	5259
95	5383	5250	5399	5495	5356
Type 6 Radar Waveform_21					
Frequency List (MHz)	0	1	2	3	4
0	5541	5333	5419	5353	5375
5	5577	5530	5551	5589	5651
10	5322	5522	5629	5525	5418
15	5595	5659	5423	5376	5707
20	5349	5700	5536	5537	5345
25	5696	5593	5646	5340	5653
30	5511	5517	5626	5671	5303
35	5390	5336	5431	5556	5655
40	5513	5492	5466	5489	5385
45	5397	5493	5642	5720	5656
50	5442	5304	5639	5677	5290
55	5532	5580	5343	5255	5558
60	5394	5280	5465	5258	5614
65	5271	5606	5380	5387	5526
70	5615	5446	5534	5294	5395
75	5685	5350	5367	5658	5319
80	5560	5335	5282	5448	5447
85	5529	5673	5272	5680	5348
90	5436	5274	5474	5605	5569
95	5609	5649	5583	5354	5620

Type 6 Radar Waveform_22					
Frequency List (MHz)	0	1	2	3	4
0	5321	5572	5355	5514	5595
5	5619	5552	5626	5277	5383
10	5482	5586	5563	5349	5546
15	5506	5722	5287	5468	5568
20	5715	5515	5317	5692	5509
25	5311	5486	5451	5422	5627
30	5310	5704	5610	5707	5663
35	5337	5668	5671	5543	5250
40	5367	5261	5593	5656	5489
45	5298	5372	5455	5416	5518
50	5421	5531	5602	5388	5255
55	5631	5480	5351	5551	5375
60	5420	5503	5701	5581	5411
65	5459	5307	5341	5650	5665
70	5598	5601	5449	5286	5270
75	5263	5364	5330	5331	5533
80	5536	5347	5479	5557	5530
85	5282	5290	5410	5721	5638
90	5611	5520	5500	5513	5442
95	5308	5259	5617	5325	5578
Type 6 Radar Waveform_23					
Frequency List (MHz)	0	1	2	3	4
0	5479	5336	5291	5578	5437
5	5661	5477	5701	5440	5590
10	5316	5375	5604	5447	5567
15	5497	5374	5293	5416	5382
20	5626	5681	5258	5306	5482
25	5577	5338	5654	5526	5352
30	5690	5535	5332	5378	5467
35	5696	5261	5344	5531	5421
40	5486	5702	5551	5599	5303
45	5297	5597	5283	5620	5328
50	5443	5585	5670	5645	5425
55	5504	5448	5533	5357	5282
60	5512	5721	5648	5445	5371
65	5292	5587	5549	5610	5697
70	5711	5353	5360	5312	5299
75	5643	5317	5511	5542	5457
80	5347	5660	5704	5373	5438
85	5506	5565	5698	5678	5545
90	5342	5616	5251	5603	5380
95	5674	5476	5601	5544	5613

Type 6 Radar Waveform_24						
Frequency List (MHz)	0	1	2	3	4	
0	5259	5575	5702	5264	5657	
5	5325	5499	5301	5506	5419	
10	5722	5261	5267	5642	5588	
15	5585	5501	5396	5461	5574	
20	5634	5275	5296	5298	5455	
25	5465	5287	5382	5630	5695	
30	5394	5579	5524	5662	5589	
35	5355	5471	5469	5263	5650	
40	5520	5427	5661	5483	5631	
45	5332	5474	5652	5568	5648	
50	5334	5331	5626	5654	5539	
55	5288	5367	5633	5393	5462	
60	5330	5303	5282	5383	5337	
65	5649	5364	5573	5552	5459	
70	5697	5656	5680	5473	5503	
75	5293	5551	5675	5605	5454	
80	5542	5563	5546	5433	5533	
85	5519	5444	5518	5368	5279	
90	5498	5360	5620	5435	5658	
95	5374	5324	5281	5608	5430	
Type 6 Radar Waveform_25						
Frequency List (MHz)	0	1	2	3	4	
0	5514	5339	5638	5425	5499	
5	5367	5424	5376	5669	5626	
10	5653	5525	5308	5362	5609	
15	5673	5531	5506	5291	5642	
20	5441	5712	5387	5428	5256	
25	5614	5585	5259	5254	5533	
30	5468	5481	5402	5363	5553	
35	5513	5560	5631	5624	5564	
40	5359	5510	5407	5426	5480	
45	5463	5312	5717	5532	5705	
50	5455	5524	5474	5385	5420	
55	5449	5598	5344	5493	5478	
60	5661	5287	5440	5435	5294	
65	5253	5346	5306	5410	5318	
70	5690	5607	5452	5656	5652	
75	5615	5649	5593	5549	5274	
80	5328	5354	5267	5668	5451	
85	5262	5563	5388	5396	5250	
90	5570	5692	5716	5557	5313	
95	5283	5372	5490	5369	5674	

Type 6 Radar Waveform_26					
Frequency List (MHz)	0	1	2	3	4
0	5294	5578	5574	5586	5719
5	5409	5446	5451	5357	5358
10	5487	5314	5349	5557	5630
15	5286	5658	5602	5551	5483
20	5553	5510	5653	5379	5401
25	5619	5466	5313	5460	5288
30	5575	5454	5438	5520	5515
35	5373	5652	5651	5427	5302
40	5295	5690	5345	5569	5392
45	5292	5325	5493	5283	5720
50	5400	5650	5436	5509	5272
55	5542	5532	5447	5668	5480
60	5716	5416	5605	5380	5601
65	5554	5507	5359	5257	5425
70	5499	5255	5642	5655	5632
75	5649	5521	5713	5692	5352
80	5580	5304	5610	5431	5353
85	5448	5457	5327	5456	5524
90	5465	5536	5698	5563	5250
95	5640	5481	5276	5545	5723
Type 6 Radar Waveform_27					
Frequency List (MHz)	0	1	2	3	4
0	5452	5342	5510	5272	5561
5	5451	5371	5429	5520	5662
10	5418	5578	5390	5277	5651
15	5310	5705	5499	5675	5676
20	5691	5468	5374	5507	5415
25	5419	5564	5322	5617	5343
30	5395	5260	5289	5668	5316
35	5364	5698	5552	5489	5609
40	5298	5661	5334	5571	5699
45	5408	5551	5714	5607	5654
50	5351	5487	5598	5473	5389
55	5720	5401	5383	5677	5687
60	5545	5295	5325	5433	5380
65	5713	5708	5308	5293	5257
70	5294	5533	5299	5628	5280
75	5384	5528	5490	5358	5263
80	5333	5357	5414	5391	5595
85	5416	5445	5652	5369	5644
90	5537	5647	5575	5259	5388
95	5666	5284	5425	5590	5600

Type 6 Radar Waveform_28

Frequency List (MHz)	0	1	2	3	4
0	5707	5678	5446	5433	5306
5	5590	5393	5504	5683	5394
10	5252	5367	5431	5375	5672
15	5365	5437	5711	5544	5392
20	5569	5270	5632	5460	5347
25	5298	5267	5622	5668	5356
30	5659	5352	5475	5441	5391
35	5455	5494	5705	5403	5448
40	5381	5599	5574	5568	5628
45	5630	5491	5609	5292	5397
50	5530	5527	5538	5309	5296
55	5333	5258	5573	5496	5658
60	5577	5265	5303	5281	5531
65	5257	5329	5564	5714	5371
70	5283	5708	5492	5362	5406
75	5314	5524	5647	5284	5479
80	5345	5469	5369	5583	5254
85	5612	5529	5486	5554	5553
90	5696	5307	5602	5310	5655
95	5691	5417	5323	5360	5350

Type 6 Radar Waveform_29

Frequency List (MHz)	0	1	2	3	4
0	5487	5442	5382	5594	5623
5	5632	5318	5579	5274	5601
10	5658	5253	5472	5570	5693
15	5453	5564	5339	5589	5584
20	5480	5436	5573	5549	5320
25	5661	5691	5350	5297	5390
30	5323	5309	5690	5686	5497
35	5546	5387	5383	5414	5287
40	5464	5537	5717	5565	5557
45	5610	5574	5345	5284	5406
50	5703	5398	5655	5524	5687
55	5288	5315	5629	5706	5625
60	5312	5669	5604	5702	5257
65	5681	5268	5299	5456	5517
70	5540	5697	5286	5451	5331
75	5501	5452	5295	5289	5428
80	5351	5639	5342	5664	5272
85	5425	5349	5580	5259	5277
90	5718	5678	5255	5711	5424
95	5710	5675	5396	5426	5558



Test Site	WJ-SR8	Test Engineer	Jake Lan
Test Date	2026-02-10		
Test Item	Radar Statistical Performance Check (802.11be-EHT160 - 5570 MHz)		

Radar Type 1-4 - Radar Statistical Performance								
Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect
0	5505	1	5607	0	5647	1	5650	1
1	5590	1	5614	1	5545	0	5569	1
2	5614	1	5490	0	5603	1	5534	1
3	5592	0	5561	1	5570	1	5633	0
4	5491	1	5632	0	5640	1	5577	1
5	5625	1	5570	1	5572	0	5603	0
6	5555	1	5649	1	5526	0	5533	1
7	5534	1	5589	1	5544	1	5565	0
8	5615	1	5574	1	5503	1	5490	1
9	5518	1	5564	0	5528	1	5563	1
10	5645	1	5526	1	5614	1	5581	1
11	5591	1	5605	1	5510	1	5570	1
12	5611	1	5650	0	5625	1	5508	1
13	5490	1	5646	1	5631	1	5509	1
14	5635	1	5522	1	5522	1	5595	1
15	5514	1	5510	1	5536	1	5626	1
16	5548	1	5634	1	5560	0	5516	1
17	5570	0	5514	1	5558	1	5622	1
18	5559	1	5500	1	5511	0	5523	1
19	5512	0	5531	1	5548	1	5585	0
20	5643	1	5523	1	5491	0	5599	1
21	5496	1	5596	0	5554	1	5590	0
22	5557	1	5627	1	5650	1	5617	0
23	5581	1	5639	0	5497	1	5518	1
24	5582	1	5501	1	5611	1	5513	1
25	5574	0	5620	1	5597	1	5528	1
26	5515	1	5509	1	5490	1	5614	1
27	5610	1	5520	1	5561	1	5540	1