


|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX G Mode 2412 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

130 dBuV/m

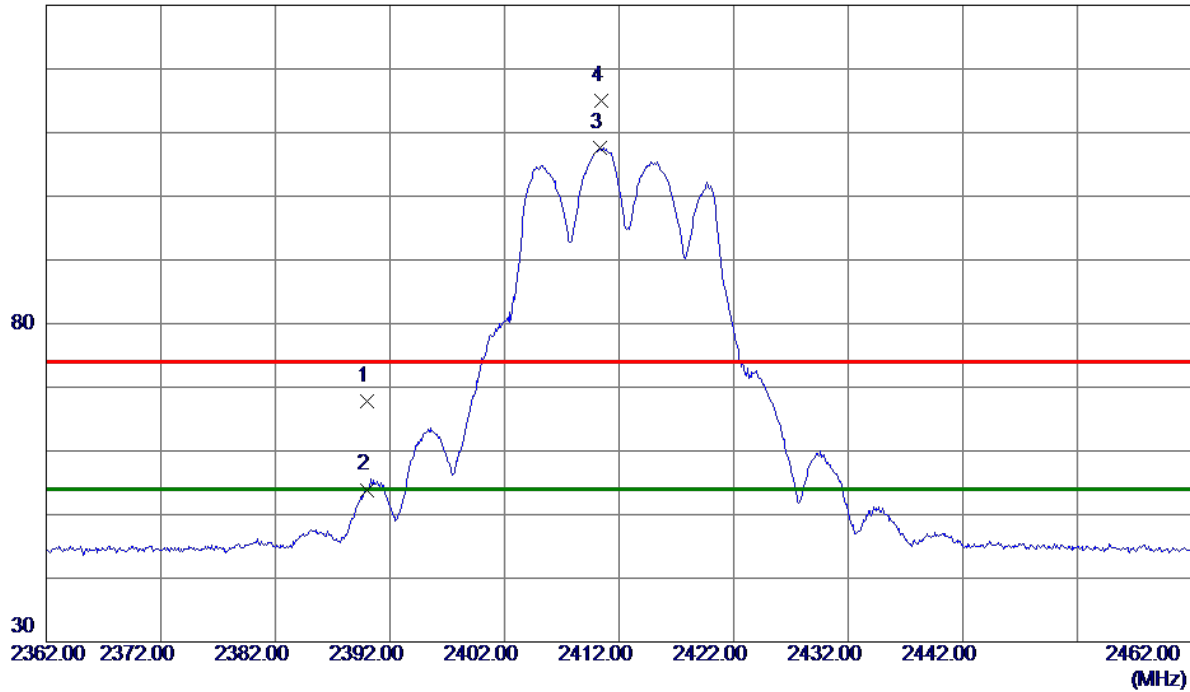

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 59.69                      | 8.05                    | 67.74                     | 74.00           | -6.26        | Peak     |          |
| 2   | 2390.0000    | 45.85                      | 8.05                    | 53.90                     | 54.00           | -0.10        | AVG      |          |
| 3 * | 2410.3000    | 99.55                      | 8.06                    | 107.61                    | 54.00           | 53.61        | AVG      | No Limit |
| 4   | 2410.4000    | 106.87                     | 8.06                    | 114.93                    | 74.00           | 40.93        | Peak     | No Limit |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX G Mode 2412 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

100 dBuV/m

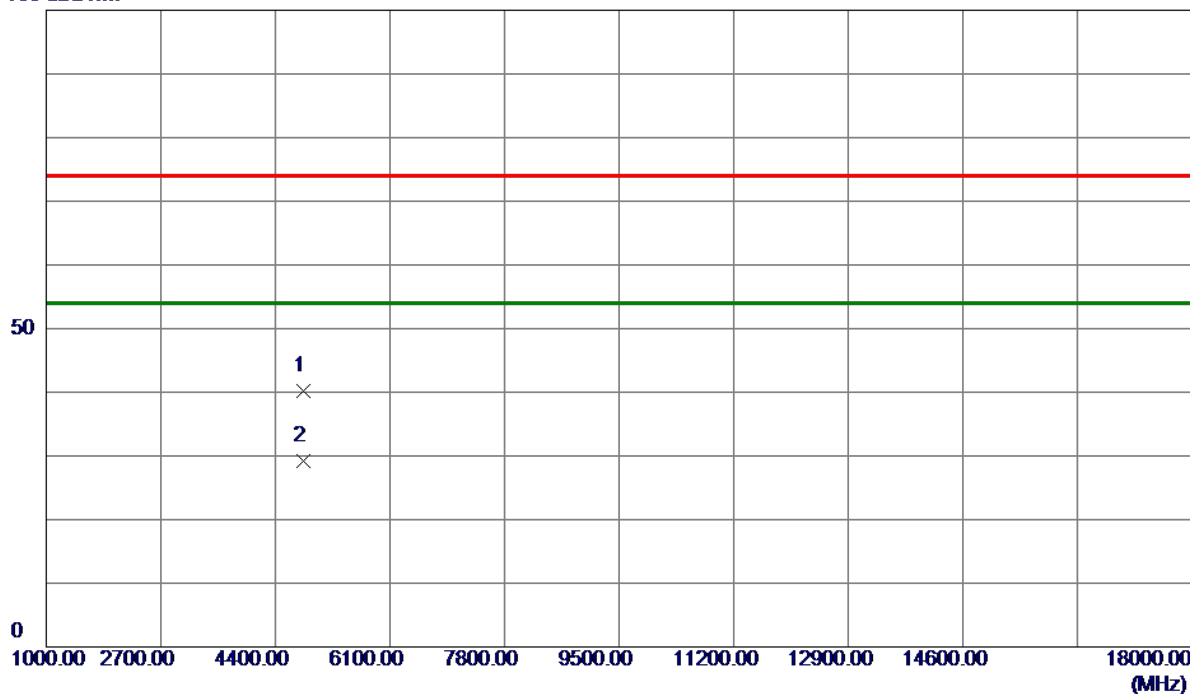

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4823.7310    | 36.71                      | 3.41                    | 40.12                     | 74.00           | -33.88       | Peak     |         |
| 2 * | 4824.6360    | 25.74                      | 3.41                    | 29.15                     | 54.00           | -24.85       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX G Mode 2417 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

130 dBuV/m

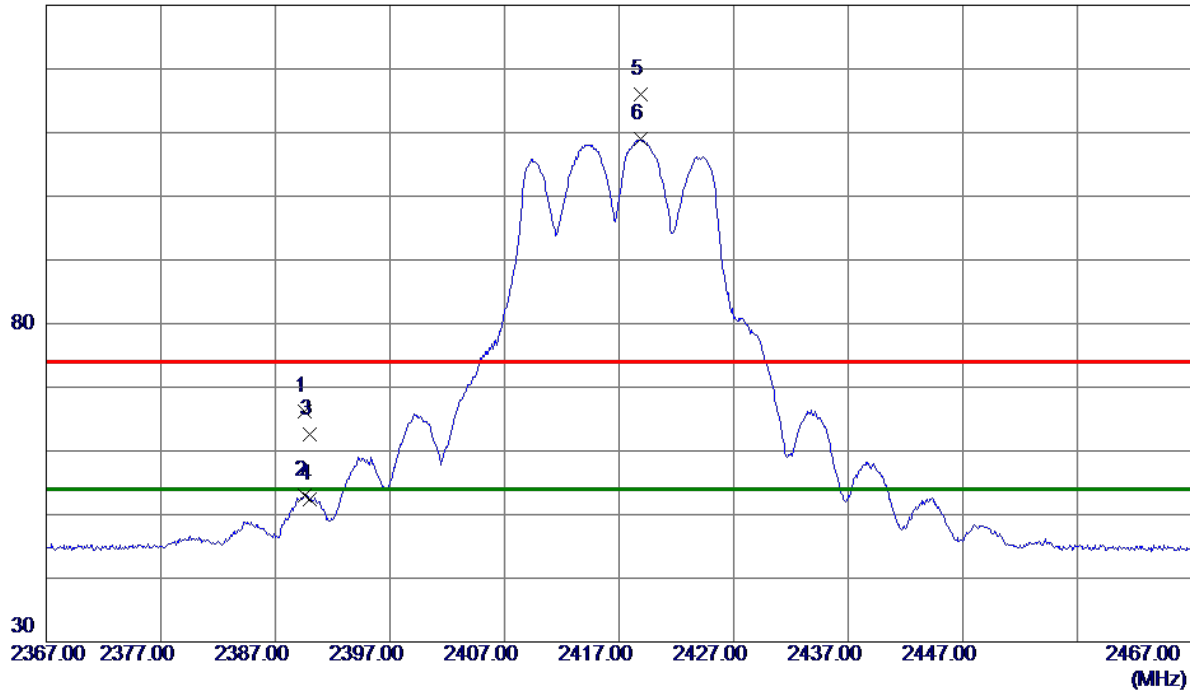

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2389.6000    | 58.10                      | 8.05                    | 66.15                     | 74.00           | -7.85        | Peak     |          |
| 2   | 2389.6000    | 45.04                      | 8.05                    | 53.09                     | 54.00           | -0.91        | AVG      |          |
| 3   | 2390.0000    | 54.57                      | 8.05                    | 62.62                     | 74.00           | -11.38       | Peak     |          |
| 4   | 2390.0000    | 44.37                      | 8.05                    | 52.42                     | 54.00           | -1.58        | AVG      |          |
| 5   | 2418.9000    | 108.01                     | 8.07                    | 116.08                    | 74.00           | 42.08        | Peak     | No Limit |
| 6 * | 2418.9000    | 109.95                     | 8.07                    | 109.02                    | 54.00           | 55.02        | AVG      | No Limit |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX G Mode 2417 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

100 dBuV/m

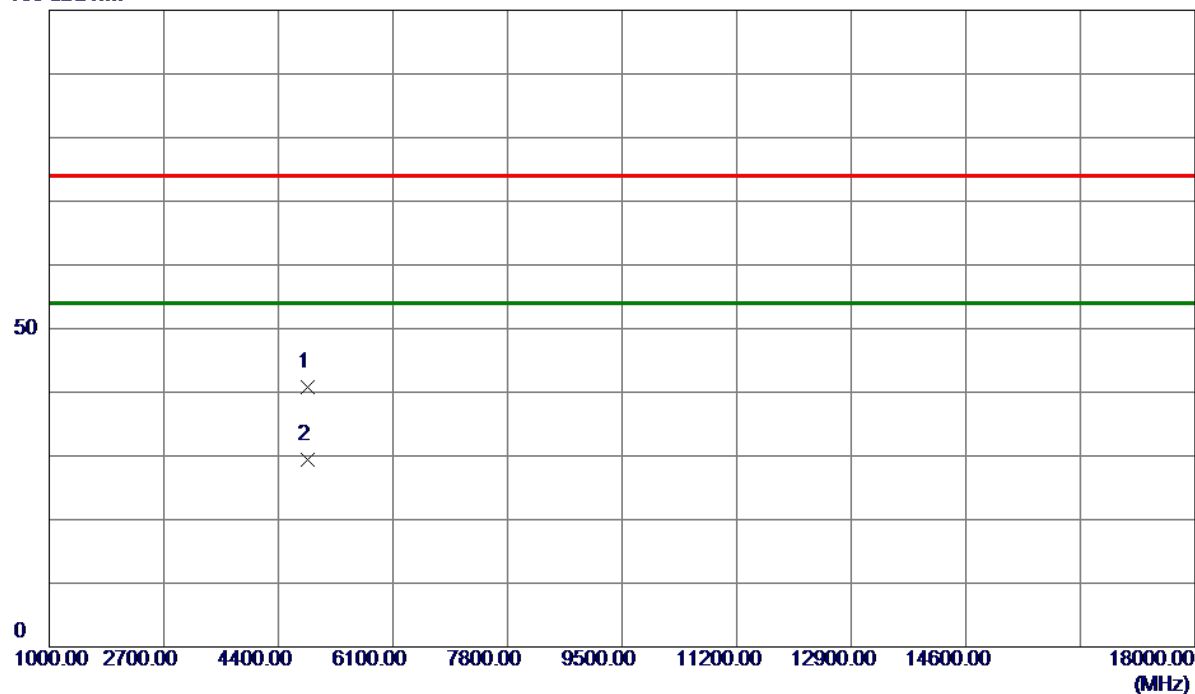


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4834.3330    | 37.29                      | 3.44                    | 40.73                     | 74.00           | -33.27       | Peak     |         |
| 2 * | 4834.4080    | 26.03                      | 3.44                    | 29.47                     | 54.00           | -24.53       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX G Mode 2437 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

130 dBuV/m

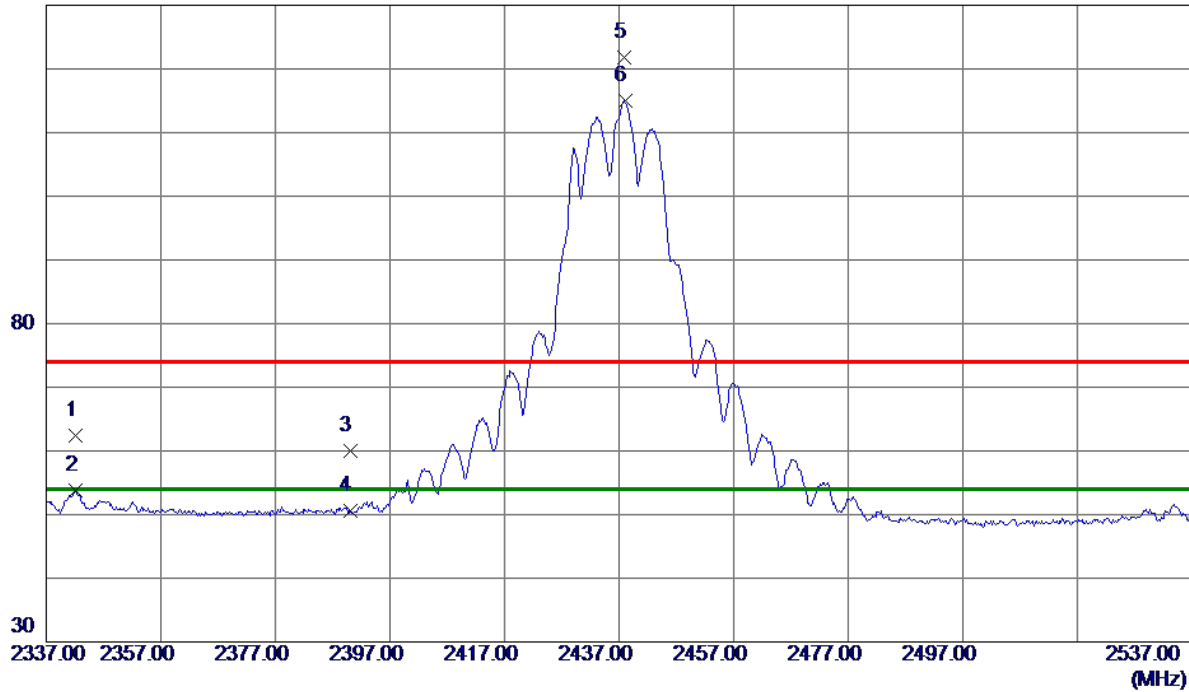

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2342.2000    | 54.30                      | 8.02                    | 62.32                     | 74.00           | -11.68       | Peak     |          |
| 2   | 2342.2000    | 45.78                      | 8.02                    | 53.80                     | 54.00           | -0.20        | AVG      |          |
| 3   | 2390.0000    | 52.04                      | 8.05                    | 60.09                     | 74.00           | -13.91       | Peak     |          |
| 4   | 2390.0000    | 42.47                      | 8.05                    | 50.52                     | 54.00           | -3.48        | AVG      |          |
| 5   | 2437.8000    | 113.81                     | 8.08                    | 121.89                    | 74.00           | 47.89        | Peak     | No Limit |
| 6 * | 2438.0000    | 106.96                     | 8.08                    | 115.04                    | 54.00           | 61.04        | AVG      | No Limit |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX G Mode 2437 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

100 dBuV/m

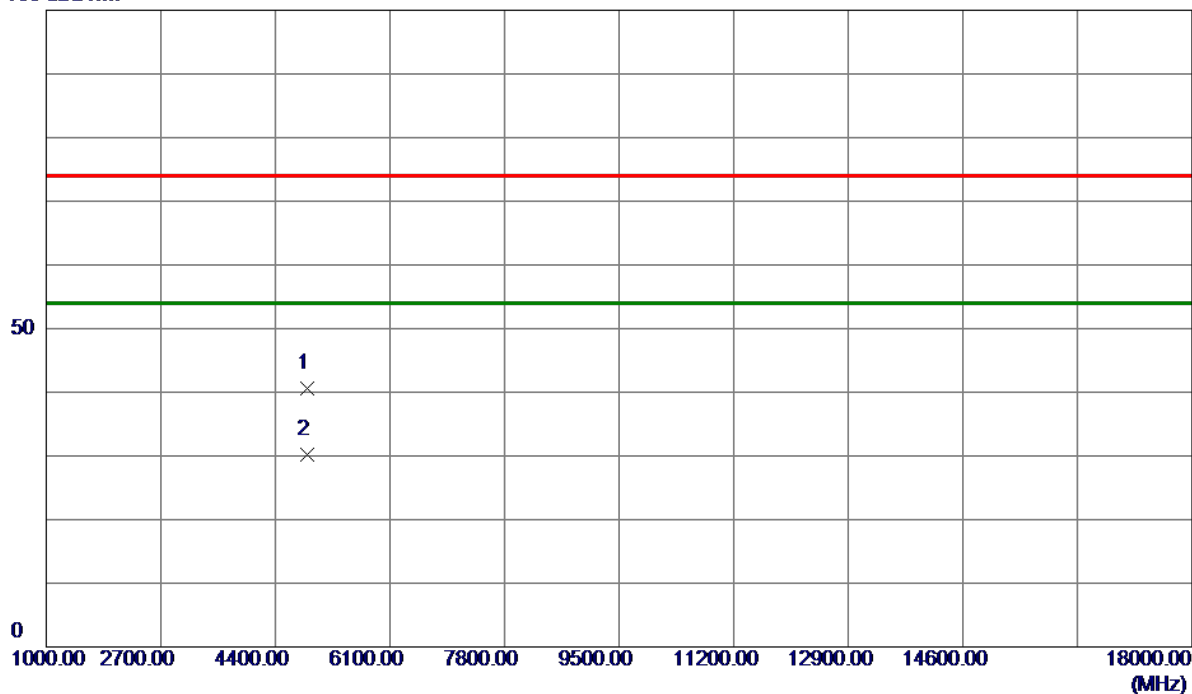


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4874.2830    | 37.02                      | 3.58                    | 40.60                     | 74.00           | -33.40       | Peak     |         |
| 2 * | 4874.6440    | 26.68                      | 3.58                    | 30.26                     | 54.00           | -23.74       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX G Mode 2457 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

130 dBuV/m

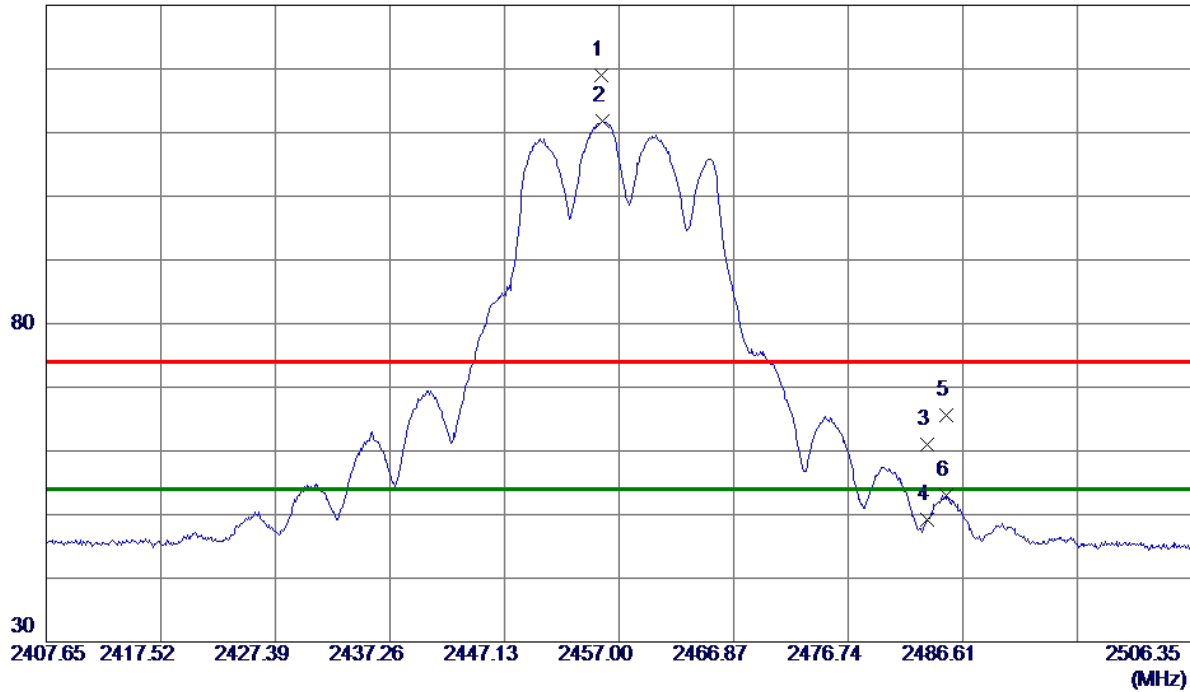

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2455.5189    | 110.90                     | 8.09                    | 118.99                    | 74.00           | 44.99        | Peak     | No Limit |
| 2 * | 2455.6180    | 103.66                     | 8.09                    | 111.75                    | 54.00           | 57.75        | AVG      | No Limit |
| 3   | 2483.5000    | 52.85                      | 8.11                    | 60.96                     | 74.00           | -13.04       | Peak     |          |
| 4   | 2483.5000    | 41.02                      | 8.11                    | 49.13                     | 54.00           | -4.87        | AVG      |          |
| 5   | 2485.1299    | 57.56                      | 8.11                    | 65.67                     | 74.00           | -8.33        | Peak     |          |
| 6   | 2485.1299    | 44.95                      | 8.11                    | 53.06                     | 54.00           | -0.94        | AVG      |          |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX G Mode 2457 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

100 dBuV/m

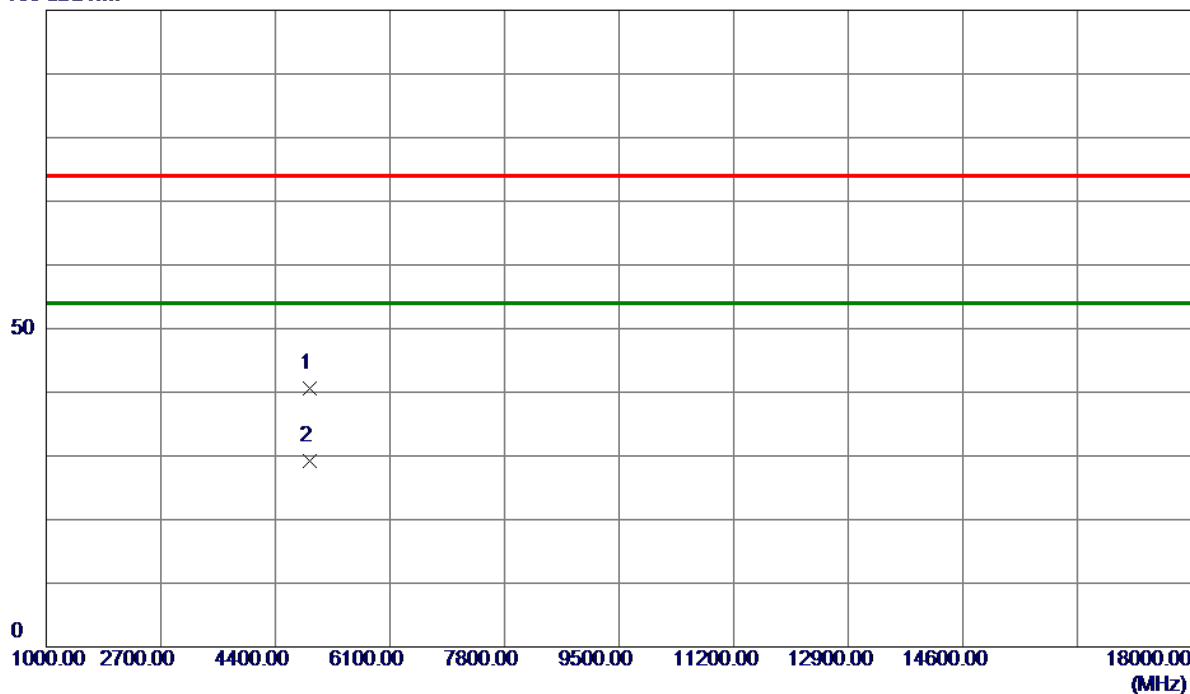

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4913.2570    | 36.90                      | 3.72                    | 40.62                     | 74.00           | -33.38       | Peak     |         |
| 2 * | 4913.3380    | 25.53                      | 3.72                    | 29.25                     | 54.00           | -24.75       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX G Mode 2462 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

130 dBuV/m

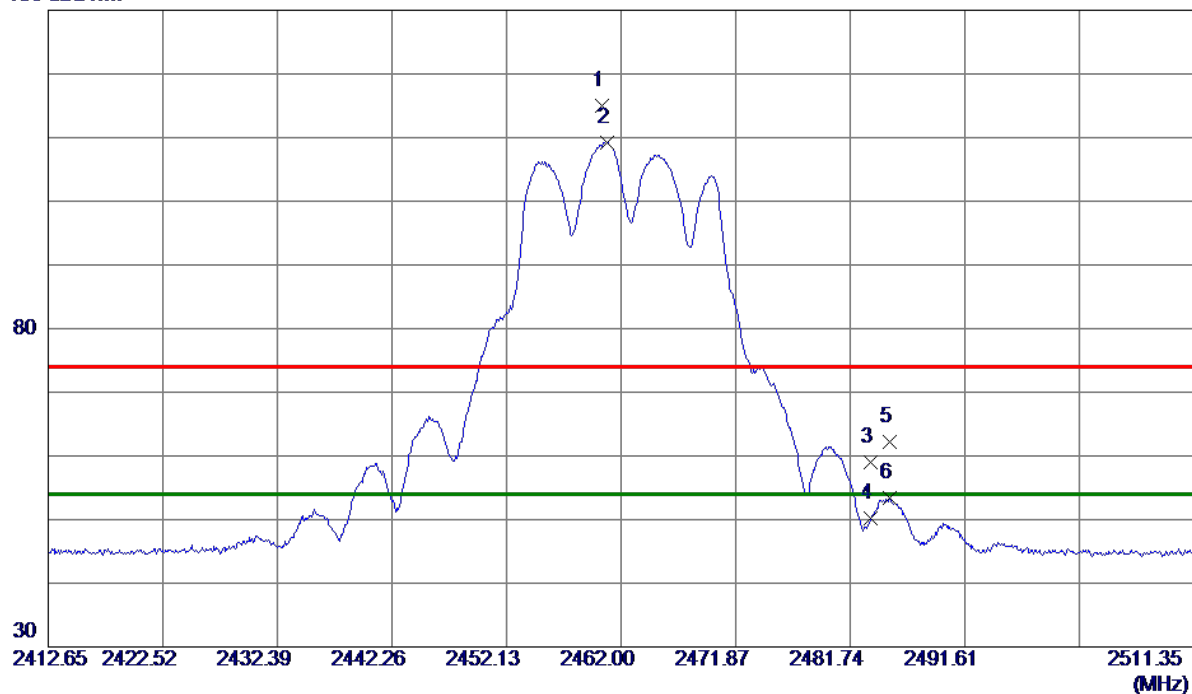


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2460.3220    | 106.95                     | 8.09                    | 115.04                    | 74.00           | 41.04        | Peak     | No Limit |
| 2 * | 2460.8160    | 101.19                     | 8.09                    | 109.28                    | 54.00           | 55.28        | AVG      | No Limit |
| 3   | 2483.5000    | 50.83                      | 8.11                    | 58.94                     | 74.00           | -15.06       | Peak     |          |
| 4   | 2483.5000    | 42.02                      | 8.11                    | 50.13                     | 54.00           | -3.87        | AVG      |          |
| 5   | 2485.0960    | 54.15                      | 8.11                    | 62.26                     | 74.00           | -11.74       | Peak     |          |
| 6   | 2485.0960    | 45.23                      | 8.11                    | 53.34                     | 54.00           | -0.66        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX G Mode 2462 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

100 dBuV/m

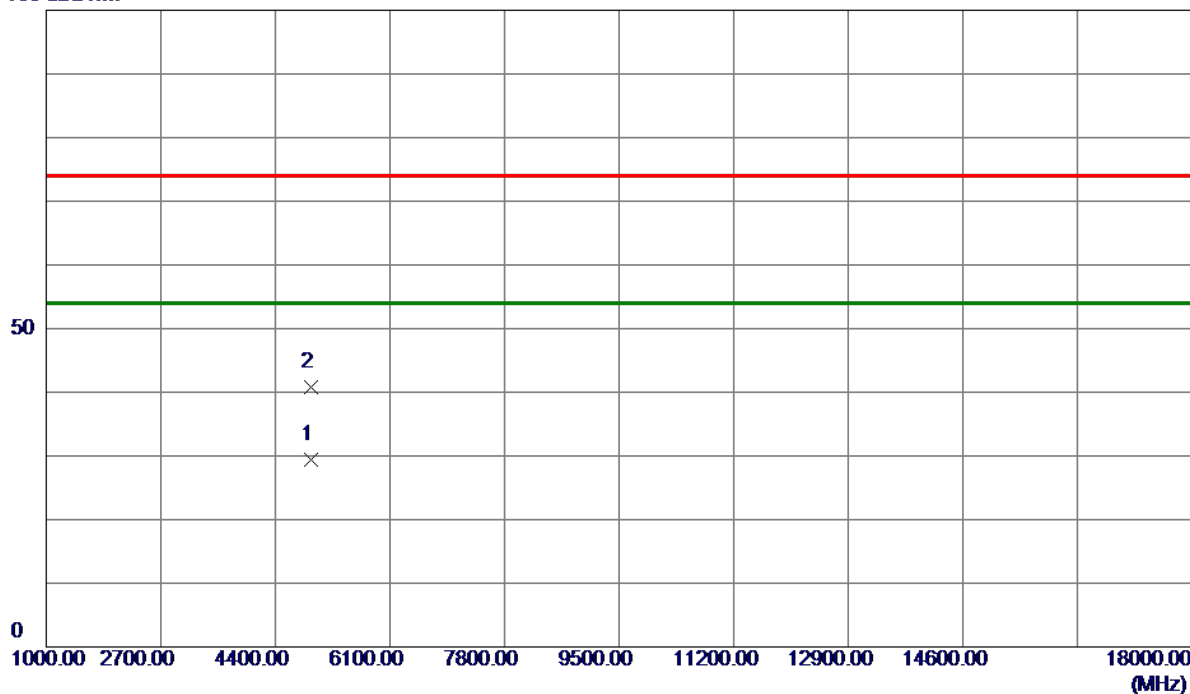

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4923.7090    | 25.66                      | 3.75                    | 29.41                     | 54.00           | -24.59       | AVG      |         |
| 2   | 4924.0160    | 37.06                      | 3.76                    | 40.82                     | 74.00           | -33.18       | Peak     |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT20) Mode 2412 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

130 dBuV/m

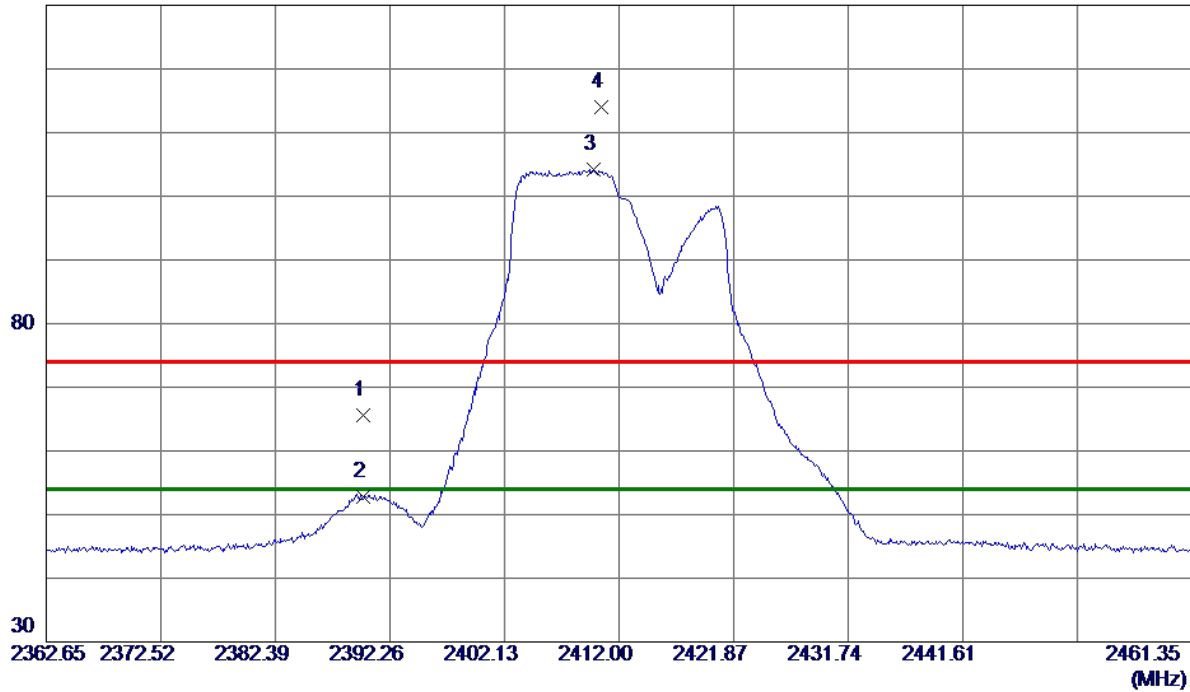


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 57.54                      | 8.05                    | 65.59                     | 74.00           | -8.41        | Peak     |          |
| 2   | 2390.0000    | 44.79                      | 8.05                    | 52.84                     | 54.00           | -1.16        | AVG      |          |
| 3 * | 2409.8290    | 96.12                      | 8.06                    | 104.18                    | 54.00           | 50.18        | AVG      | No Limit |
| 4   | 2410.5189    | 105.87                     | 8.06                    | 113.93                    | 74.00           | 39.93        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT20) Mode 2412 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

100 dBuV/m

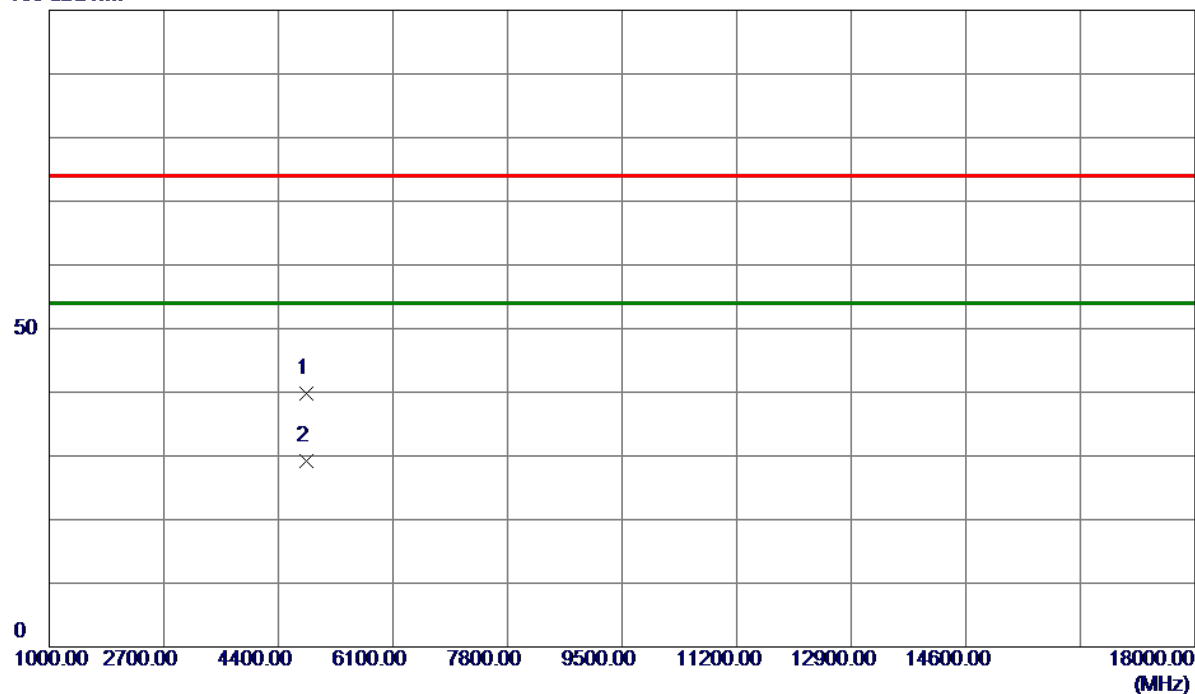

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4823.3400    | 36.35                      | 3.41                    | 39.76                     | 74.00           | -34.24       | Peak     |         |
| 2 * | 4823.6720    | 25.71                      | 3.41                    | 29.12                     | 54.00           | -24.88       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT20) Mode 2417 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

130 dBuV/m

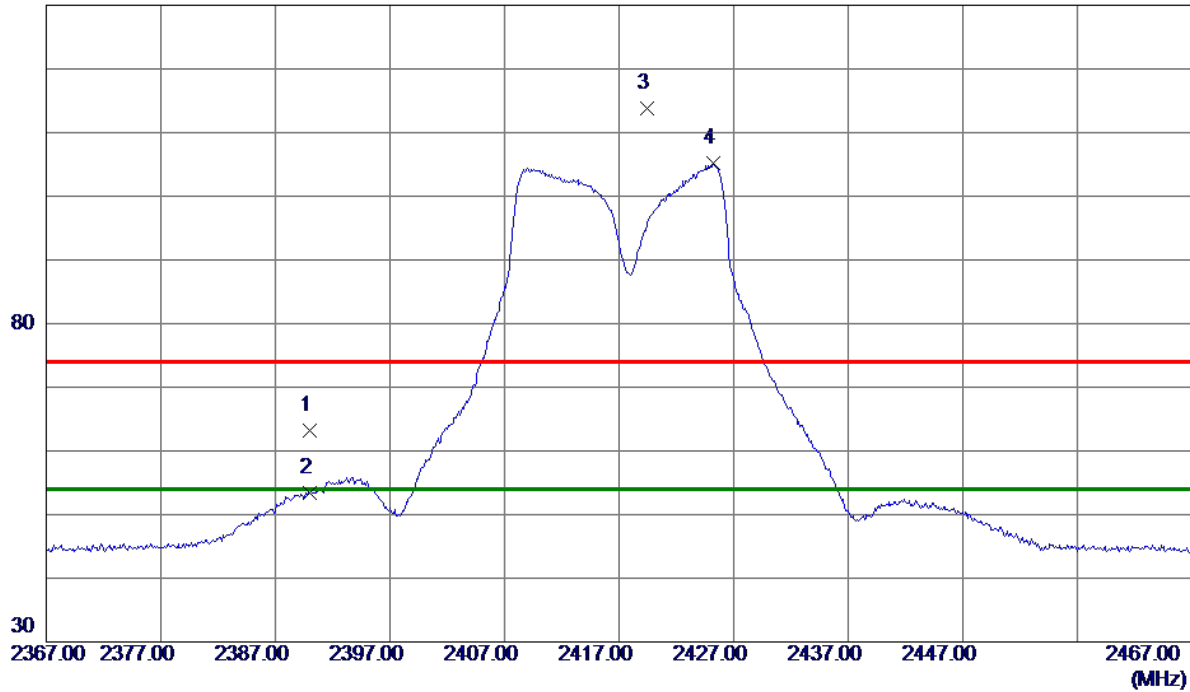

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 55.14                      | 8.05                    | 63.19                     | 74.00           | -10.81       | Peak     |          |
| 2   | 2390.0000    | 45.34                      | 8.05                    | 53.39                     | 54.00           | -0.61        | AVG      |          |
| 3   | 2419.4000    | 105.65                     | 8.07                    | 113.72                    | 74.00           | 39.72        | Peak     | No Limit |
| 4 * | 2425.2000    | 97.05                      | 8.07                    | 105.12                    | 54.00           | 51.12        | AVG      | No Limit |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT20) Mode 2417 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

100 dBuV/m

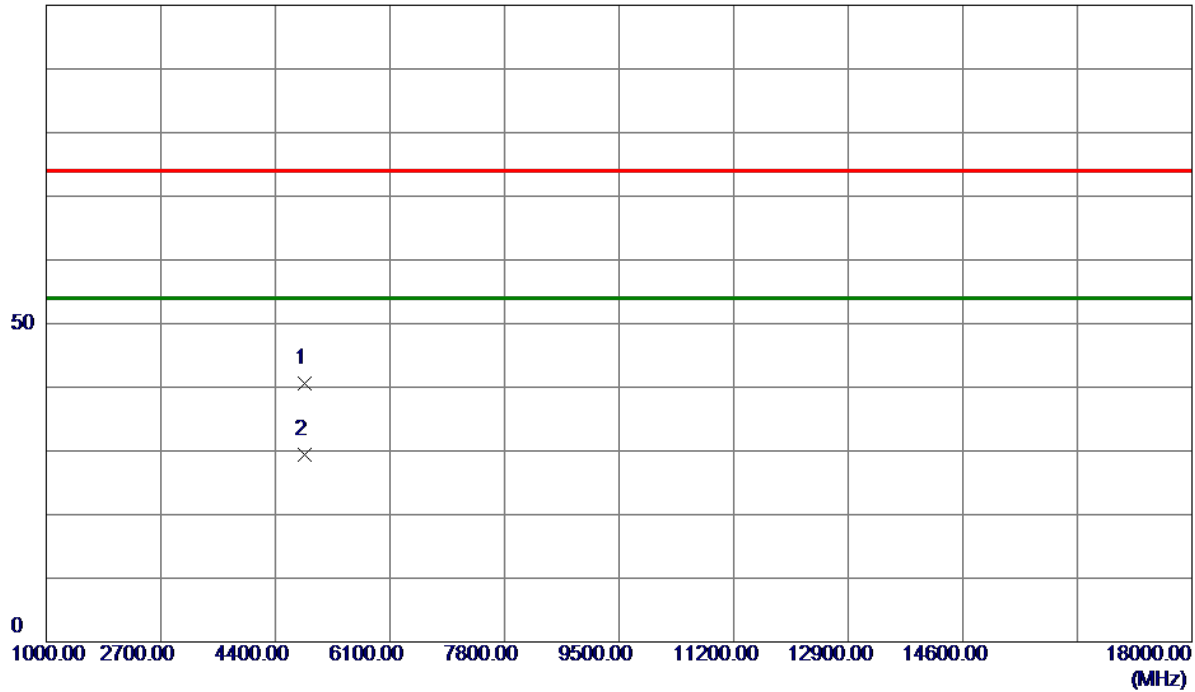


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4834.1980    | 37.14                      | 3.44                    | 40.58                     | 74.00           | -33.42       | Peak     |         |
| 2 * | 4834.6780    | 25.95                      | 3.44                    | 29.39                     | 54.00           | -24.61       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT20) Mode 2437 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

130 dBuV/m

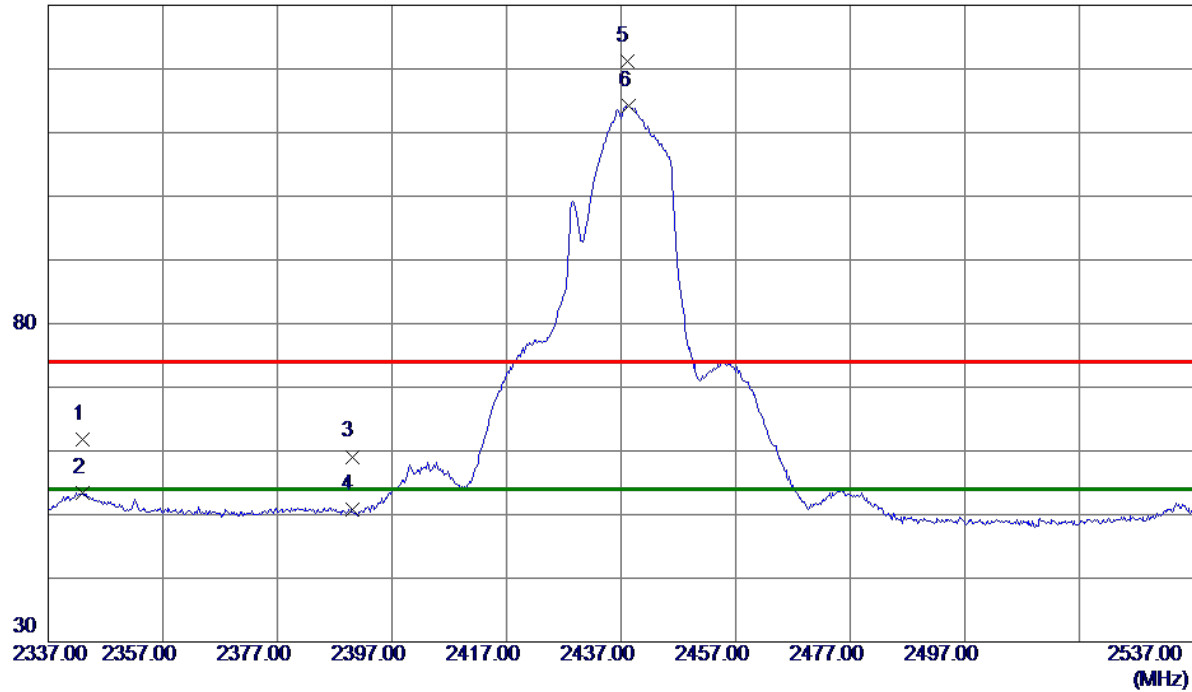

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2343.0000    | 53.70                      | 8.02                    | 61.72                     | 74.00           | -12.28       | Peak     |          |
| 2   | 2343.0000    | 45.47                      | 8.02                    | 53.49                     | 54.00           | -0.51        | AVG      |          |
| 3   | 2390.0000    | 51.05                      | 8.05                    | 59.10                     | 74.00           | -14.90       | Peak     |          |
| 4   | 2390.0000    | 42.82                      | 8.05                    | 50.87                     | 54.00           | -3.13        | AVG      |          |
| 5   | 2438.0000    | 113.19                     | 8.08                    | 121.27                    | 74.00           | 47.27        | Peak     | No Limit |
| 6 * | 2438.4000    | 106.11                     | 8.08                    | 114.19                    | 54.00           | 60.19        | AVG      | No Limit |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT20) Mode 2437 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

100 dBuV/m

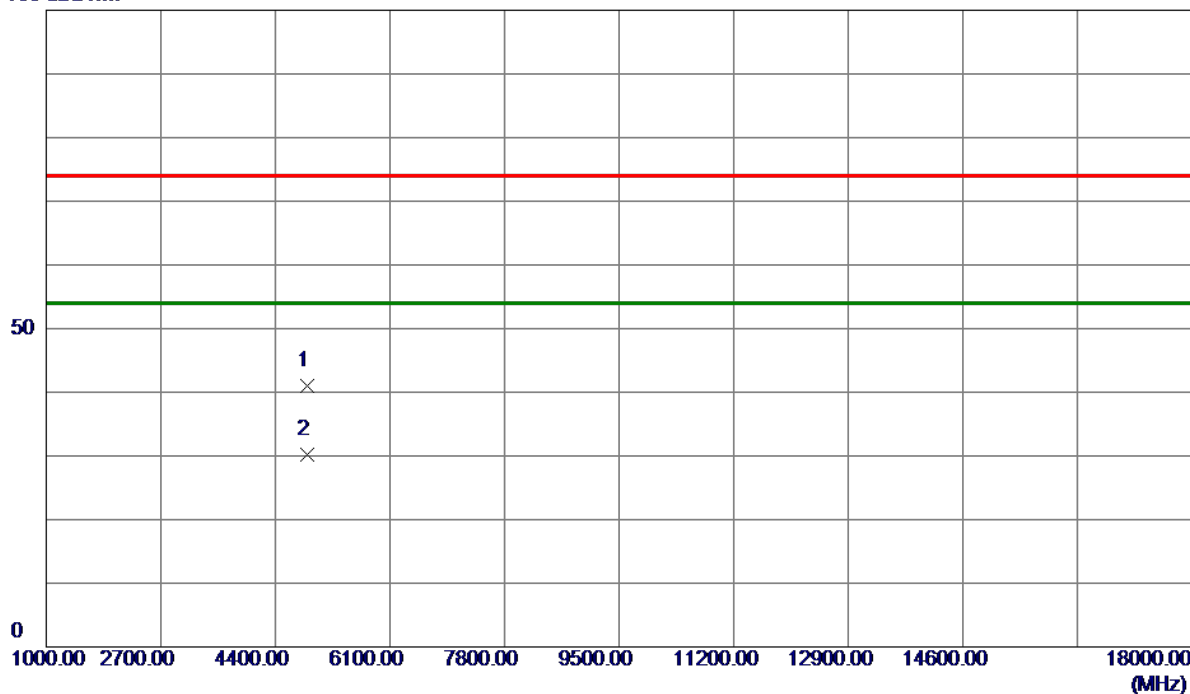

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4873.6700    | 37.47                      | 3.58                    | 41.05                     | 74.00           | -32.95       | Peak     |         |
| 2 * | 4874.6980    | 26.59                      | 3.58                    | 30.17                     | 54.00           | -23.83       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT20) Mode 2457 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

130 dBuV/m

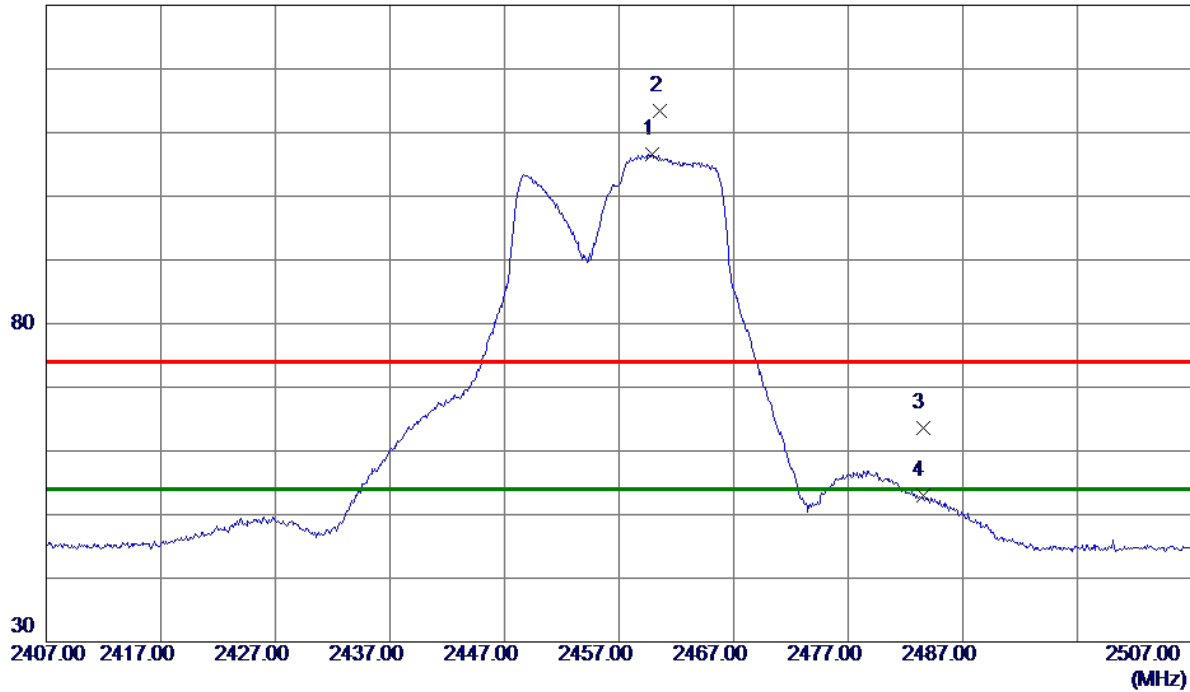


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 2459.9000    | 98.49                      | 8.09                    | 106.58                    | 54.00           | 52.58        | AVG      | No Limit |
| 2   | 2460.6000    | 105.37                     | 8.09                    | 113.46                    | 74.00           | 39.46        | Peak     | No Limit |
| 3   | 2483.5000    | 55.58                      | 8.11                    | 63.69                     | 74.00           | -10.31       | Peak     |          |
| 4   | 2483.5000    | 44.81                      | 8.11                    | 52.92                     | 54.00           | -1.08        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT20) Mode 2457 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

100 dBuV/m

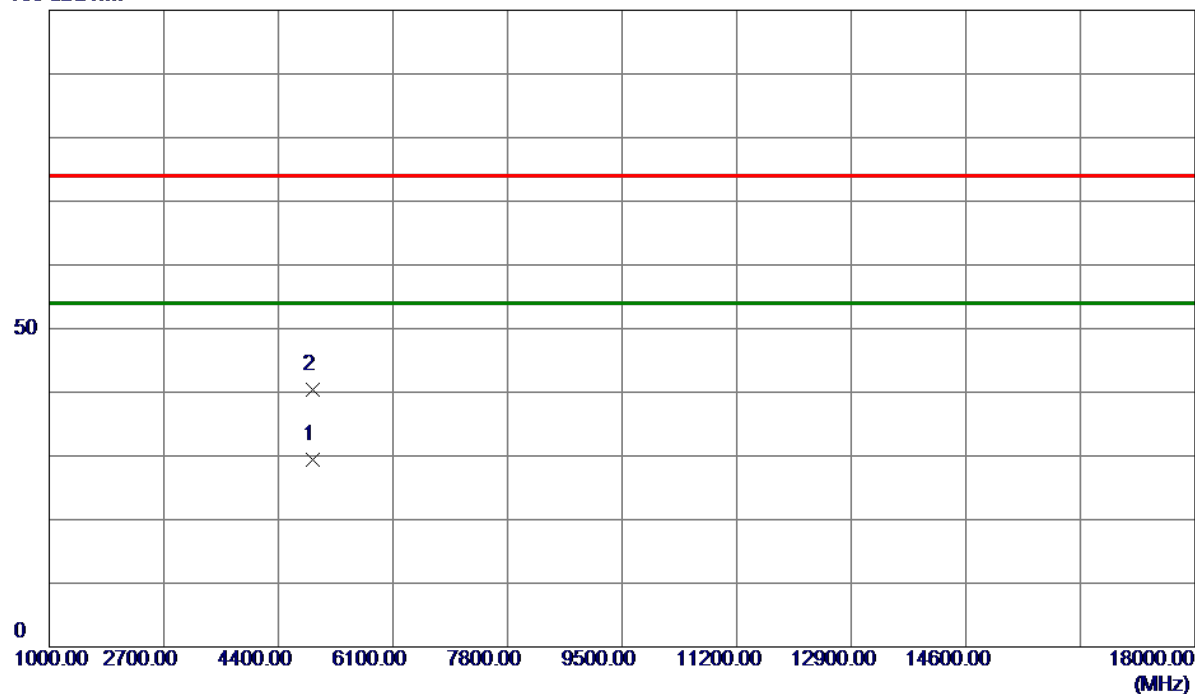

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4913.3820    | 25.66                      | 3.72                    | 29.38                     | 54.00           | -24.62       | AVG      |         |
| 2   | 4914.1690    | 36.77                      | 3.72                    | 40.49                     | 74.00           | -33.51       | Peak     |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT20) Mode 2462 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

130 dBuV/m

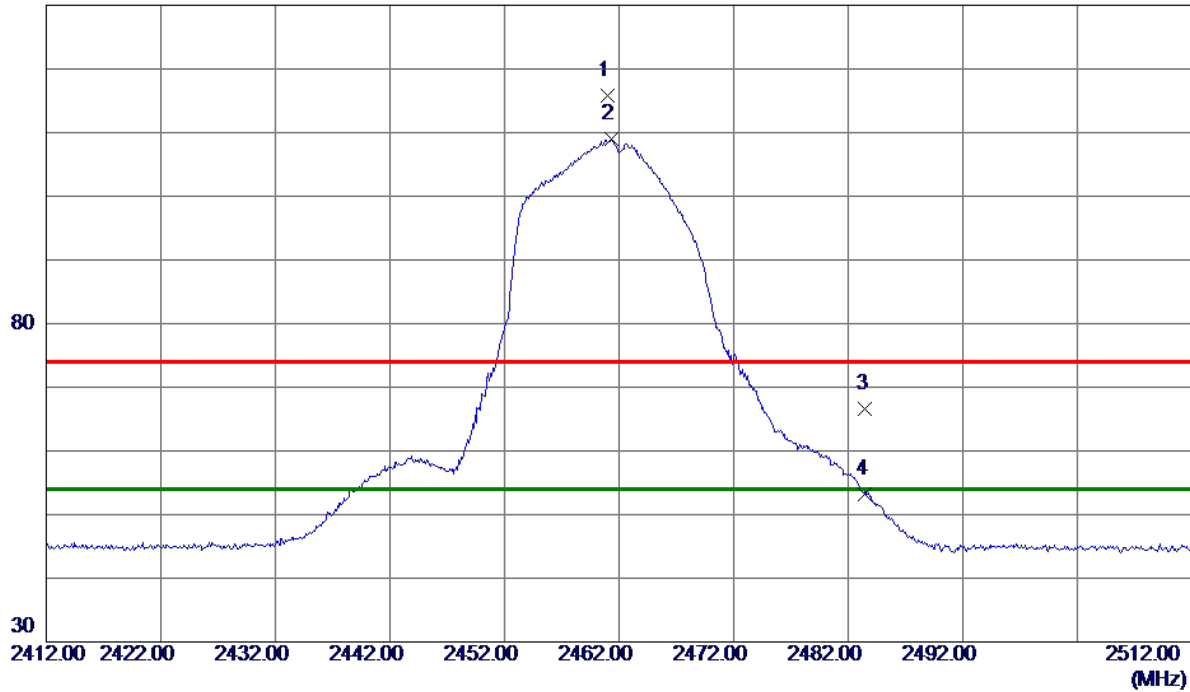

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2461.0000    | 107.78                     | 8.09                    | 115.87                    | 74.00           | 41.87        | Peak     | No Limit |
| 2 * | 2461.3000    | 100.85                     | 8.10                    | 108.95                    | 54.00           | 54.95        | AVG      | No Limit |
| 3   | 2483.5000    | 58.49                      | 8.11                    | 66.60                     | 74.00           | -7.40        | Peak     |          |
| 4   | 2483.5000    | 45.13                      | 8.11                    | 53.24                     | 54.00           | -0.76        | AVG      |          |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT20) Mode 2462 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

100 dBuV/m

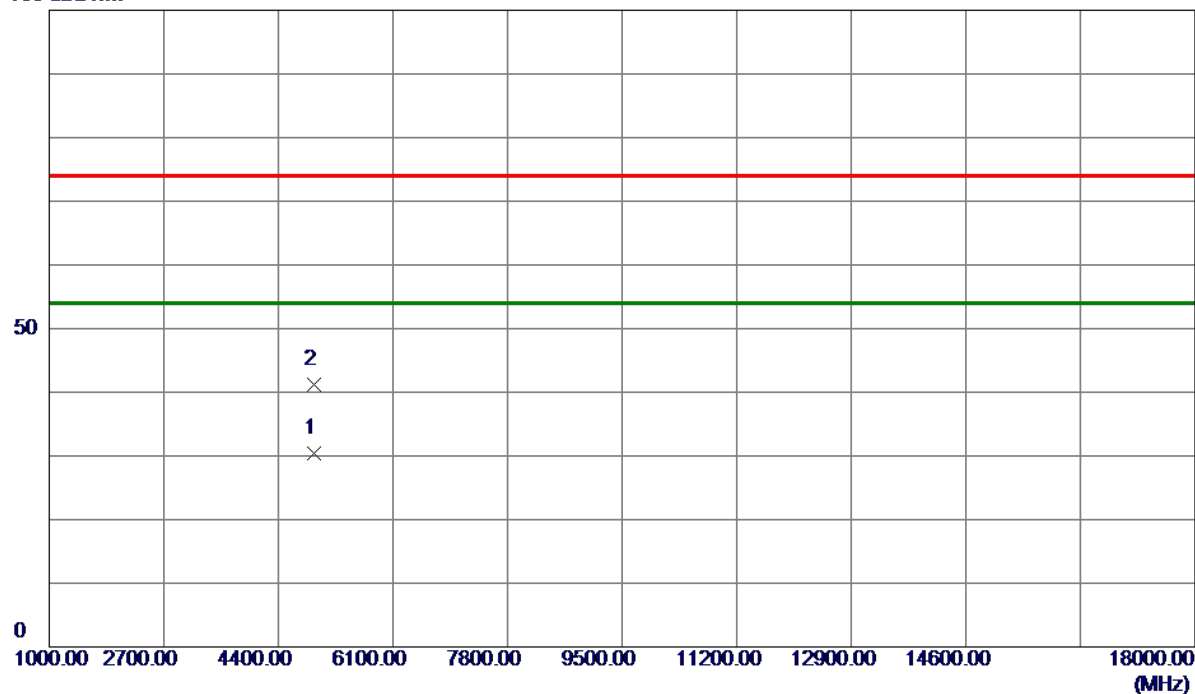


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4923.8420    | 26.69                      | 3.75                    | 30.44                     | 54.00           | -23.56       | AVG      |         |
| 2   | 4924.1800    | 37.35                      | 3.76                    | 41.11                     | 74.00           | -32.89       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT40) Mode 2422 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

130 dBuV/m

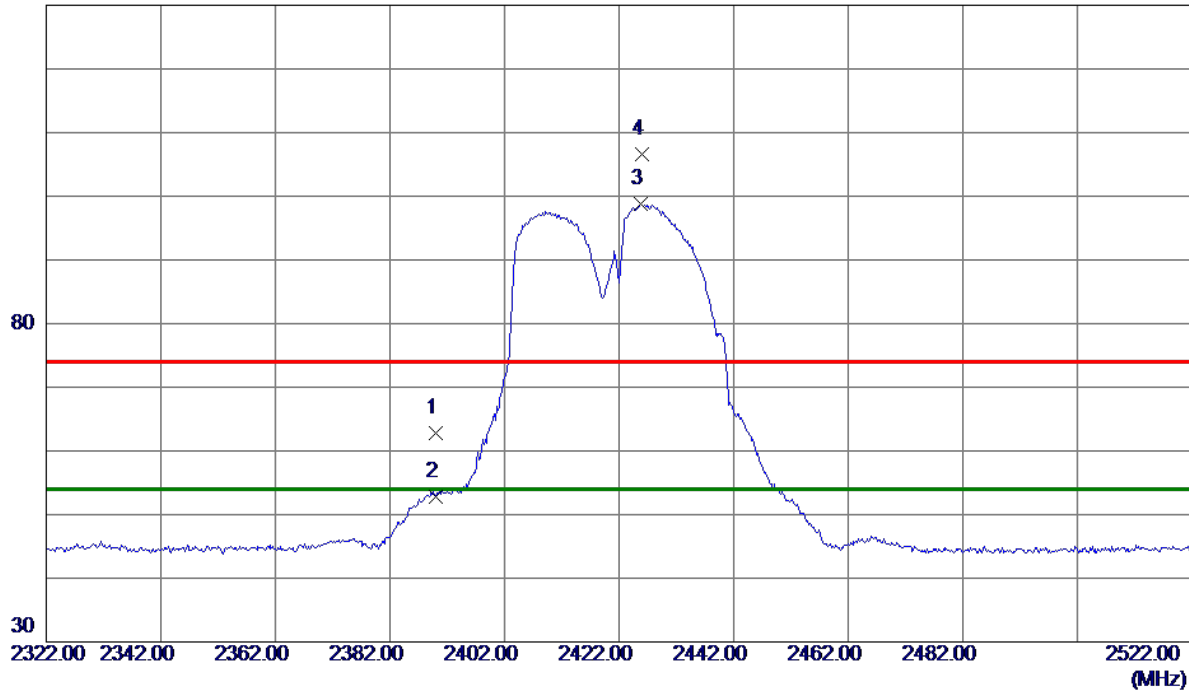


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 54.70                      | 8.05                    | 62.75                     | 74.00           | -11.25       | Peak     |          |
| 2   | 2390.0000    | 44.81                      | 8.05                    | 52.86                     | 54.00           | -1.14        | AVG      |          |
| 3 * | 2425.8000    | 90.69                      | 8.07                    | 98.76                     | 54.00           | 44.76        | AVG      | No Limit |
| 4   | 2426.0000    | 98.48                      | 8.07                    | 106.55                    | 74.00           | 32.55        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT40) Mode 2422 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

100 dBuV/m

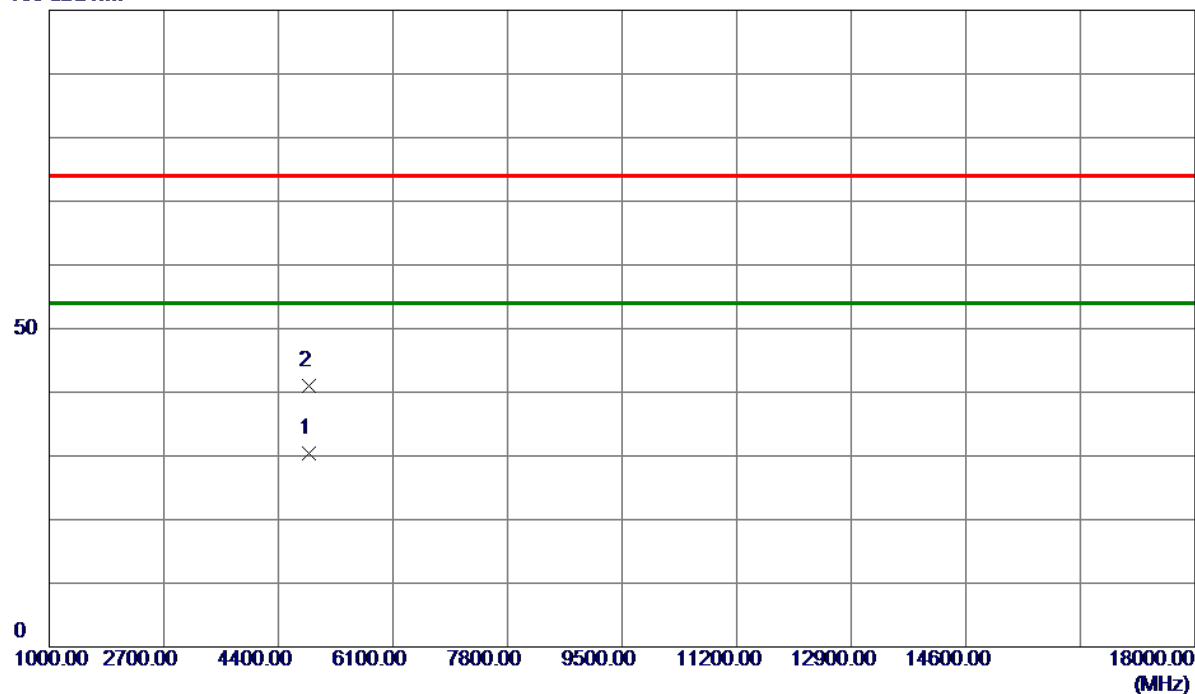

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4844.0830    | 26.83                      | 3.48                    | 30.31                     | 54.00           | -23.69       | AVG      |         |
| 2   | 4844.2120    | 37.56                      | 3.48                    | 41.04                     | 74.00           | -32.96       | Peak     |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT40) Mode 2427 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

130 dBuV/m

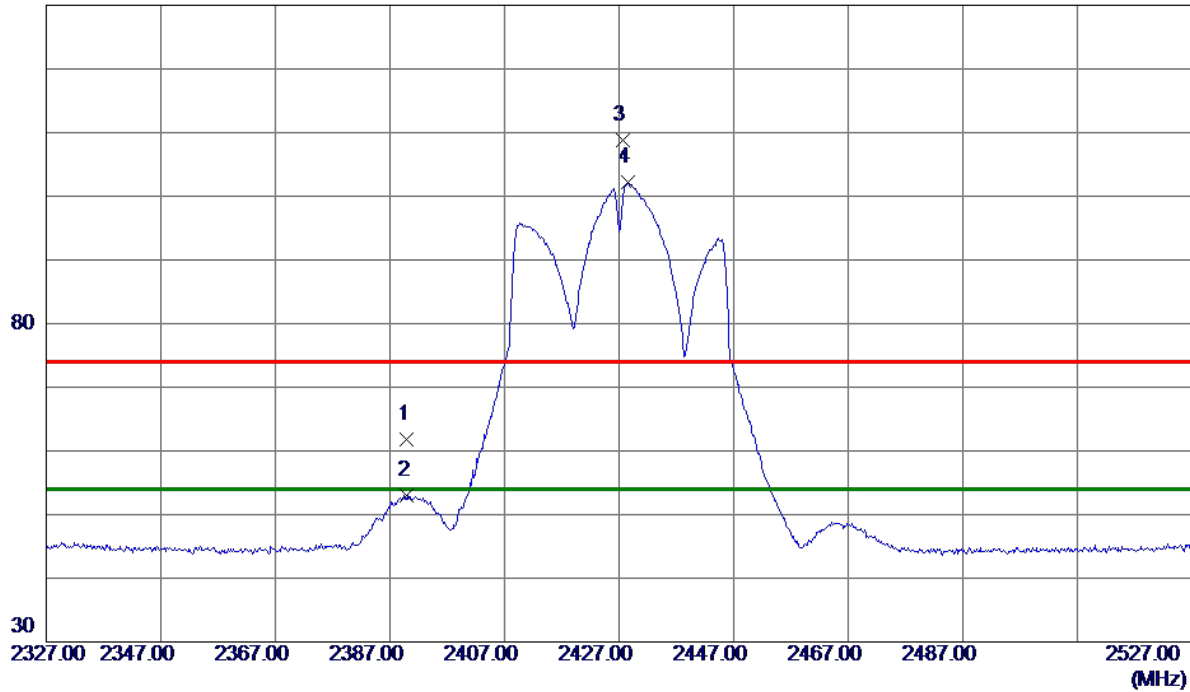


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 53.68                      | 8.05                    | 61.73                     | 74.00           | -12.27       | Peak     |          |
| 2   | 2390.0000    | 44.94                      | 8.05                    | 52.99                     | 54.00           | -1.01        | AVG      |          |
| 3   | 2427.6000    | 100.77                     | 8.07                    | 108.84                    | 74.00           | 34.84        | Peak     | No Limit |
| 4 * | 2428.6000    | 94.20                      | 8.07                    | 102.27                    | 54.00           | 48.27        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT40) Mode 2427 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

100 dBuV/m

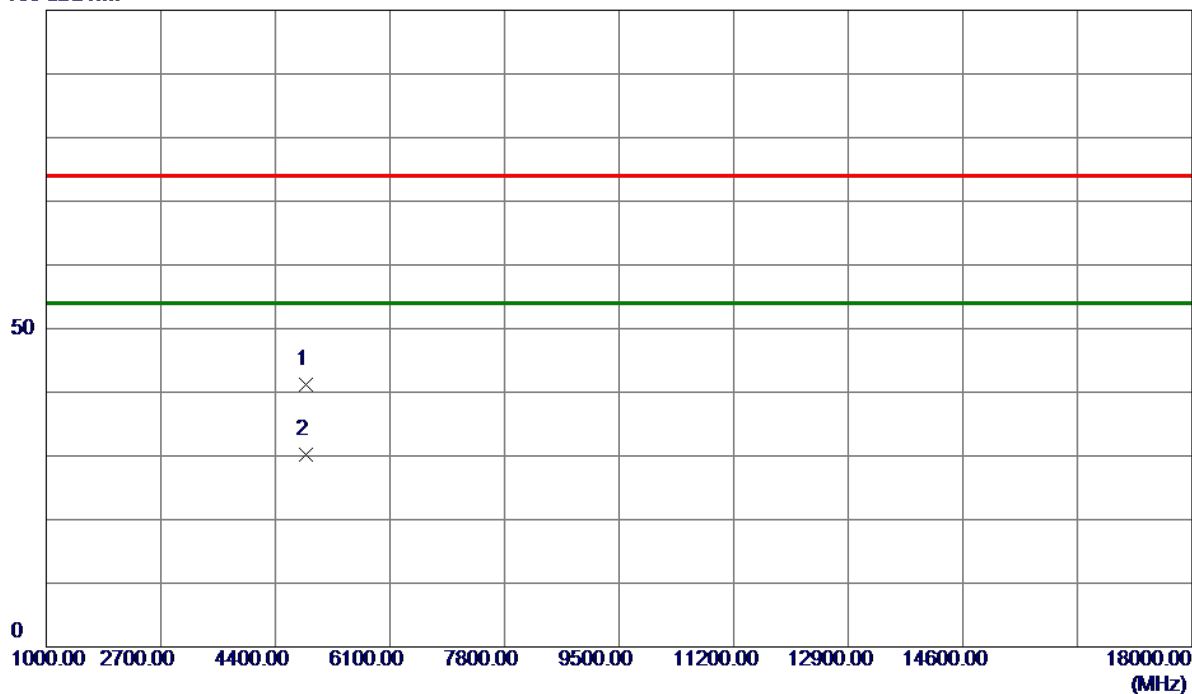

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4854.2550    | 37.67                      | 3.51                    | 41.18                     | 74.00           | -32.82       | Peak     |         |
| 2 * | 4854.6640    | 26.63                      | 3.51                    | 30.14                     | 54.00           | -23.86       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT40) Mode 2437 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

130 dBuV/m

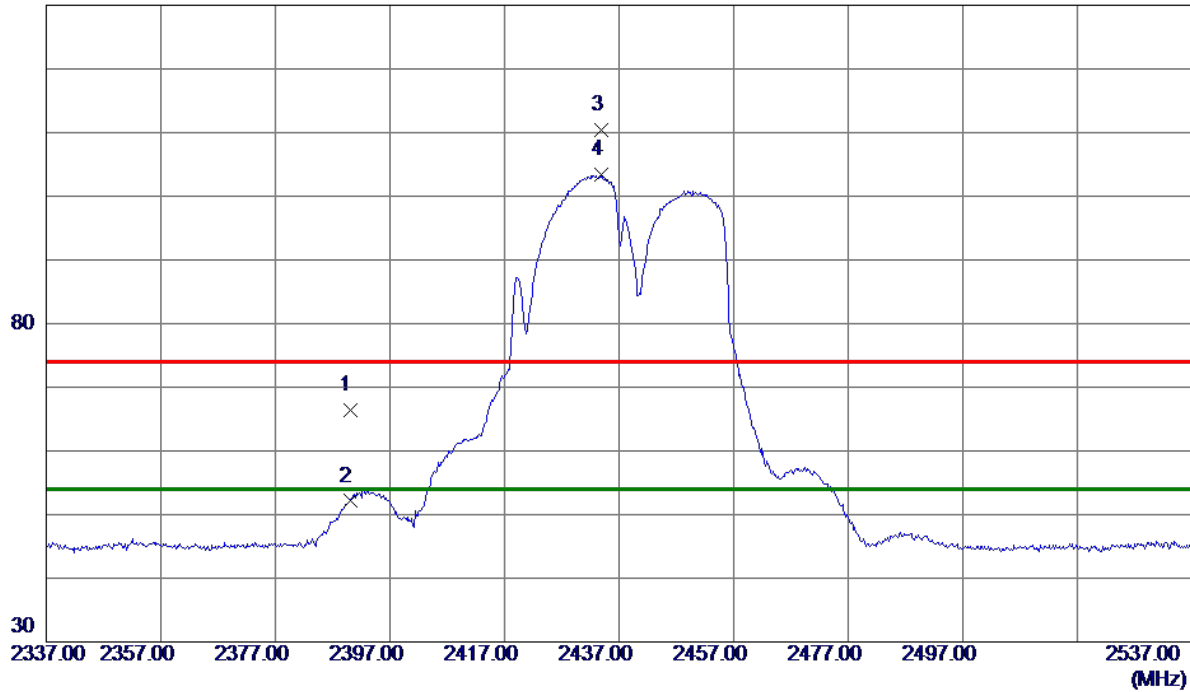

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 58.42                      | 8.05                    | 66.47                     | 74.00           | -7.53        | Peak     |          |
| 2   | 2390.0000    | 44.05                      | 8.05                    | 52.10                     | 54.00           | -1.90        | AVG      |          |
| 3   | 2433.8000    | 102.36                     | 8.08                    | 110.44                    | 74.00           | 36.44        | Peak     | No Limit |
| 4 * | 2433.8000    | 95.30                      | 8.08                    | 103.38                    | 54.00           | 49.38        | AVG      | No Limit |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT40) Mode 2437 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

100 dBuV/m

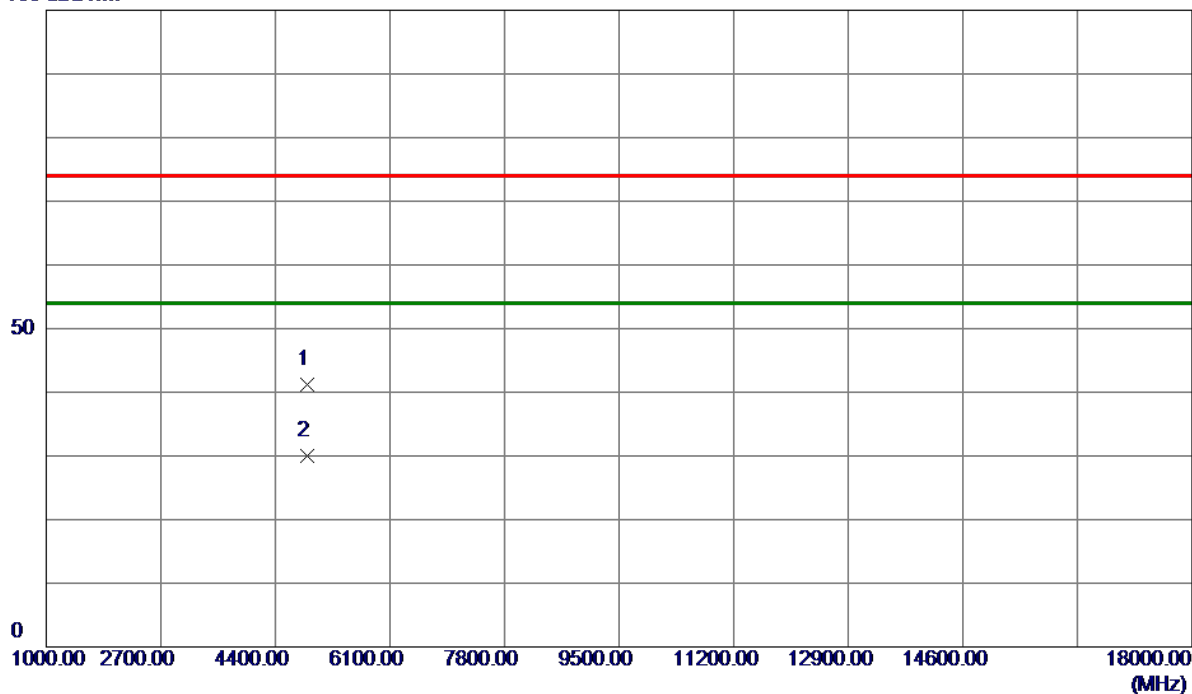

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4873.6360    | 37.58                      | 3.58                    | 41.16                     | 74.00           | -32.84       | Peak     |         |
| 2 * | 4873.6450    | 26.49                      | 3.58                    | 30.07                     | 54.00           | -23.93       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT40) Mode 2447 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

130 dBuV/m

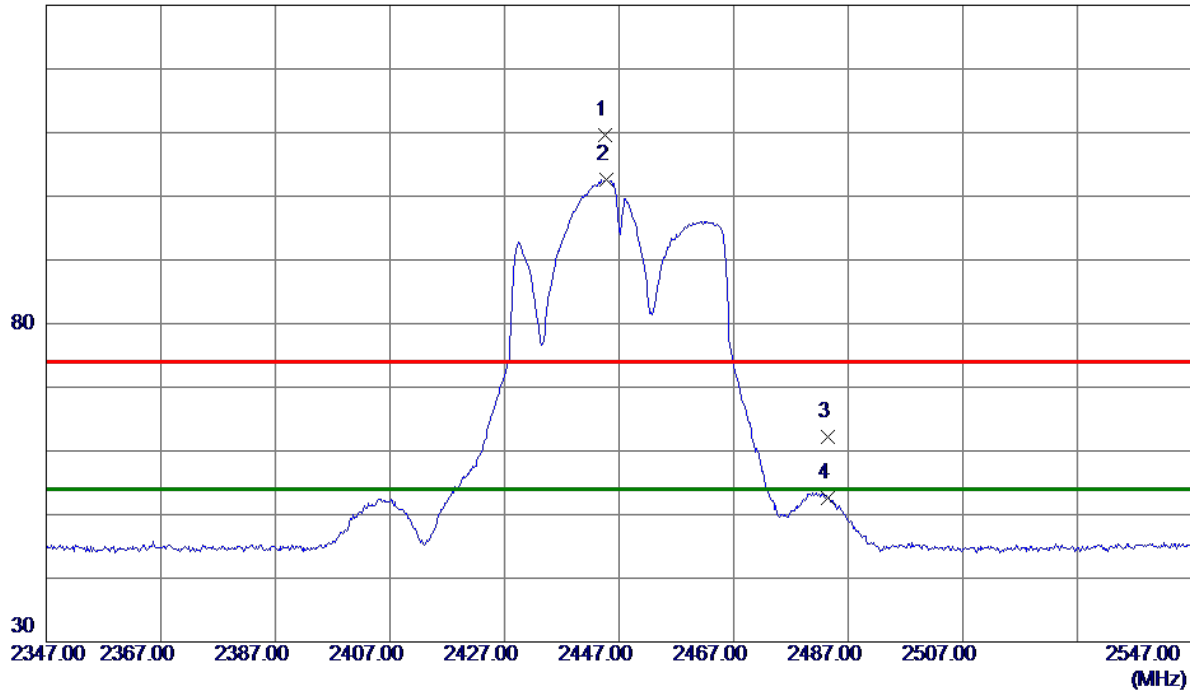


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2444.6000    | 101.61                     | 8.08                    | 109.69                    | 74.00           | 35.69        | Peak     | No Limit |
| 2 * | 2444.8000    | 94.44                      | 8.08                    | 102.52                    | 54.00           | 48.52        | AVG      | No Limit |
| 3   | 2483.5000    | 54.06                      | 8.11                    | 62.17                     | 74.00           | -11.83       | Peak     |          |
| 4   | 2483.5000    | 44.51                      | 8.11                    | 52.62                     | 54.00           | -1.38        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT40) Mode 2447 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

100 dBuV/m

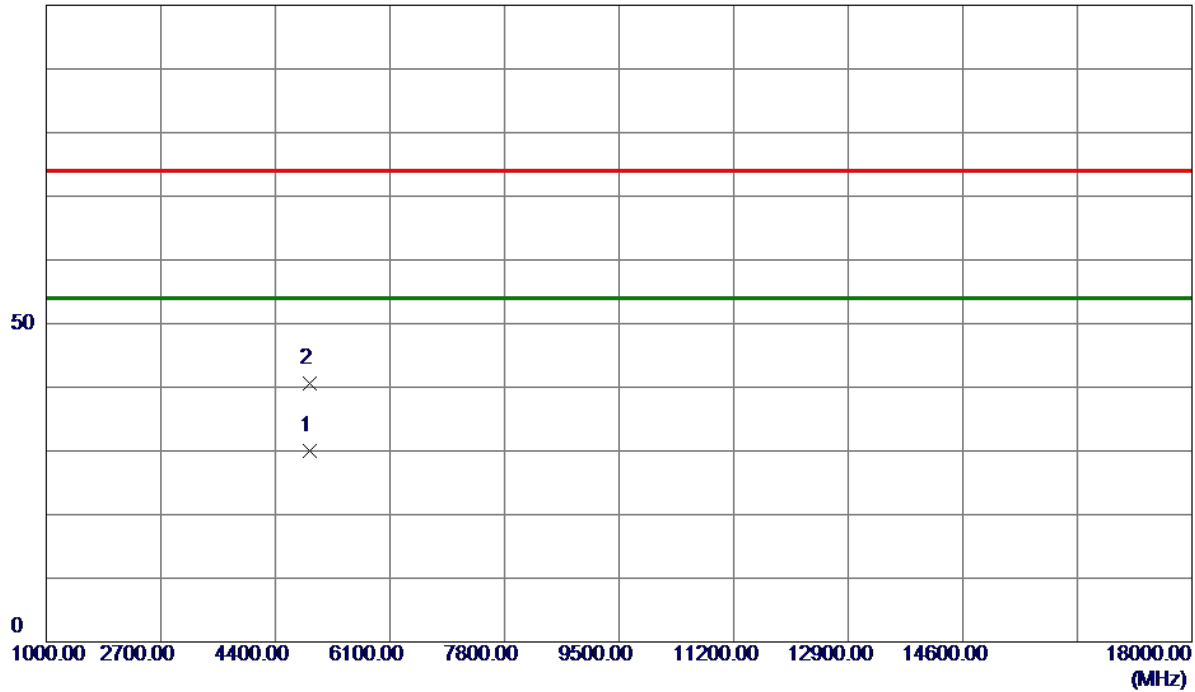


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4913.6760    | 26.19                      | 3.72                    | 29.91                     | 54.00           | -24.09       | AVG      |         |
| 2   | 4914.1560    | 36.87                      | 3.72                    | 40.59                     | 74.00           | -33.41       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT40) Mode 2452 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

130 dBuV/m

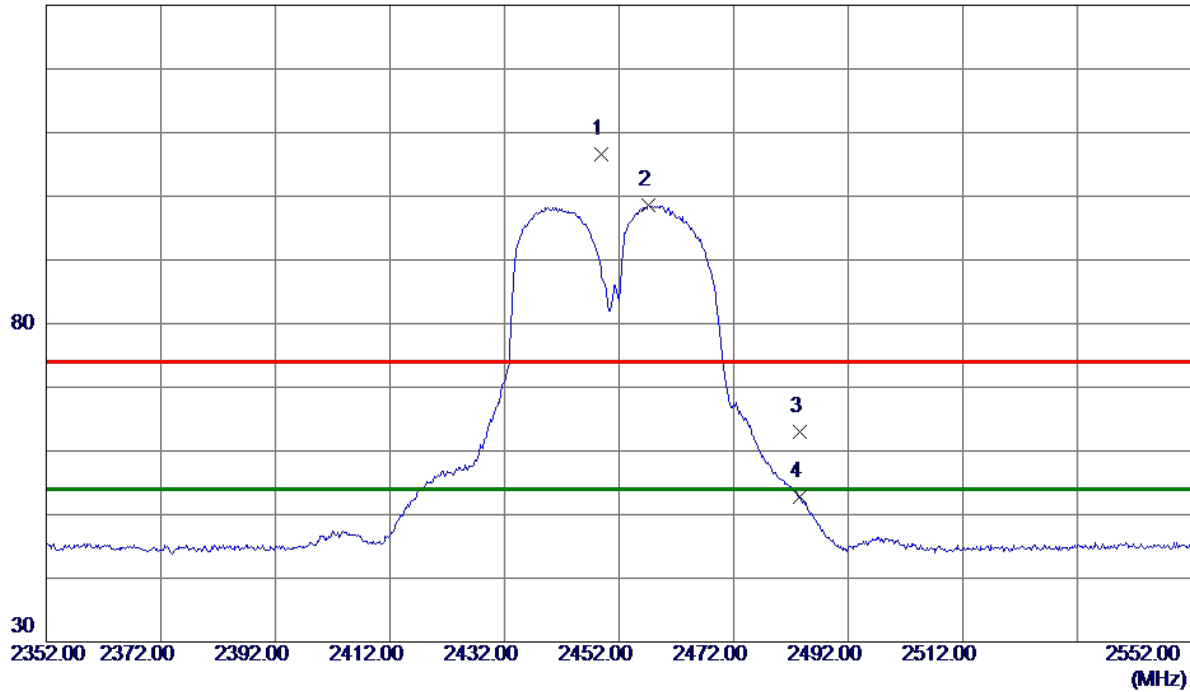


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2448.8000    | 98.44                      | 8.09                    | 106.53                    | 74.00           | 32.53        | Peak     | No Limit |
| 2 * | 2457.2000    | 90.44                      | 8.09                    | 98.53                     | 54.00           | 44.53        | AVG      | No Limit |
| 3   | 2483.5000    | 54.97                      | 8.11                    | 63.08                     | 74.00           | -10.92       | Peak     |          |
| 4   | 2483.5000    | 44.60                      | 8.11                    | 52.71                     | 54.00           | -1.29        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT40) Mode 2452 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

100 dBuV/m

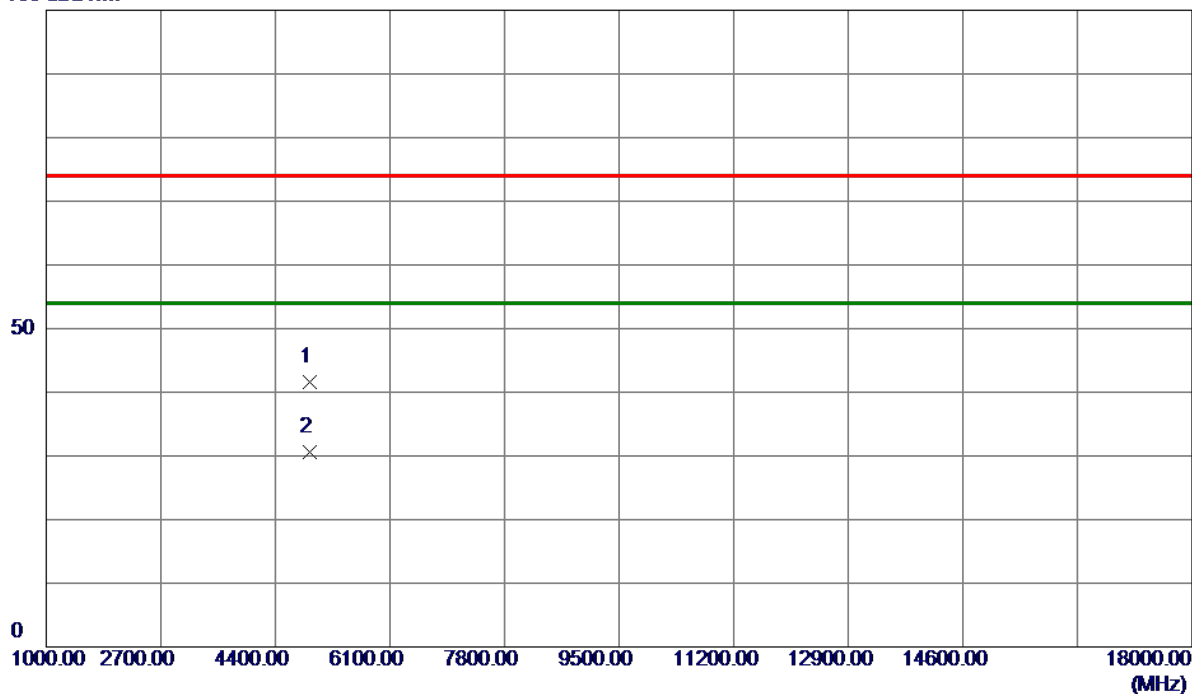

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4903.3290    | 37.84                      | 3.68                    | 41.52                     | 74.00           | -32.48       | Peak     |         |
| 2 * | 4903.3809    | 26.98                      | 3.68                    | 30.66                     | 54.00           | -23.34       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT20) Mode 2412 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

130 dBuV/m

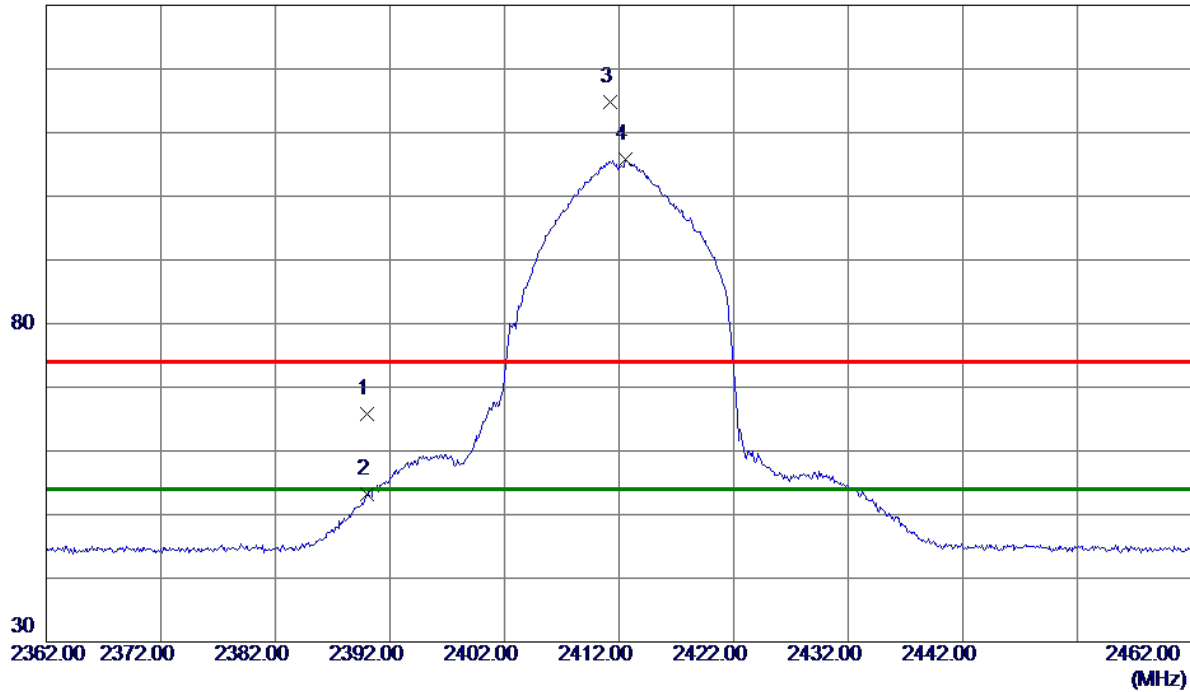


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 57.75                      | 8.05                    | 65.80                     | 74.00           | -8.20        | Peak     |          |
| 2   | 2390.0000    | 45.14                      | 8.05                    | 53.19                     | 54.00           | -0.81        | AVG      |          |
| 3   | 2411.2000    | 106.83                     | 8.06                    | 114.89                    | 74.00           | 40.89        | Peak     | No Limit |
| 4 * | 2412.6000    | 97.66                      | 8.06                    | 105.72                    | 54.00           | 51.72        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT20) Mode 2412 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

100 dBuV/m

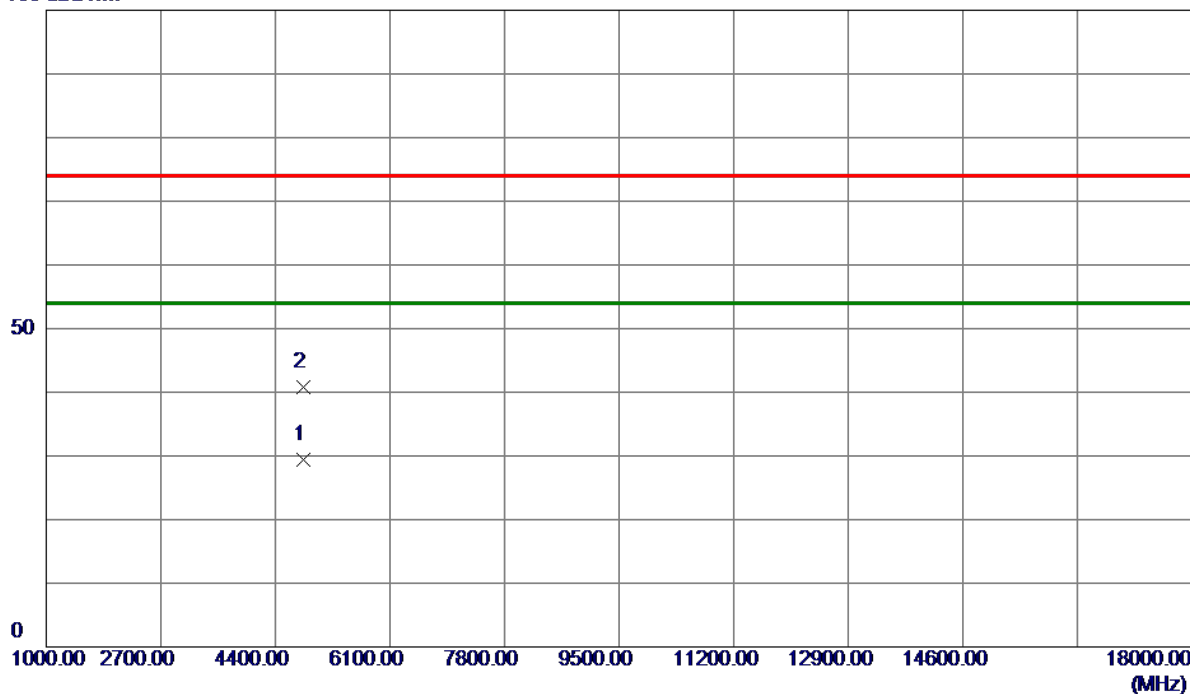


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4823.7970    | 25.96                      | 3.41                    | 29.37                     | 54.00           | -24.63       | AVG      |         |
| 2   | 4824.3460    | 37.42                      | 3.41                    | 40.83                     | 74.00           | -33.17       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT20) Mode 2417 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

130 dBuV/m

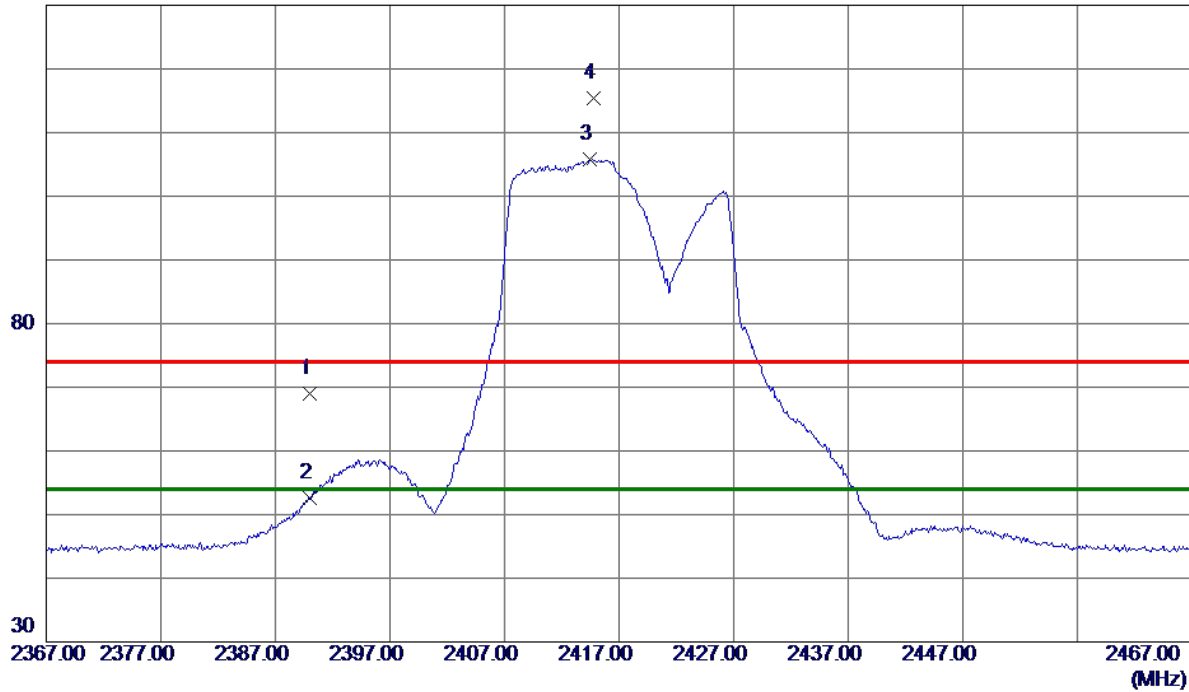

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 60.88                      | 8.05                    | 68.93                     | 74.00           | -5.07        | Peak     |          |
| 2   | 2390.0000    | 44.52                      | 8.05                    | 52.57                     | 54.00           | -1.43        | AVG      |          |
| 3 * | 2414.4000    | 97.74                      | 8.07                    | 105.81                    | 54.00           | 51.81        | AVG      | No Limit |
| 4   | 2414.8000    | 107.39                     | 8.07                    | 115.46                    | 74.00           | 41.46        | Peak     | No Limit |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT20) Mode 2417 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

100 dBuV/m

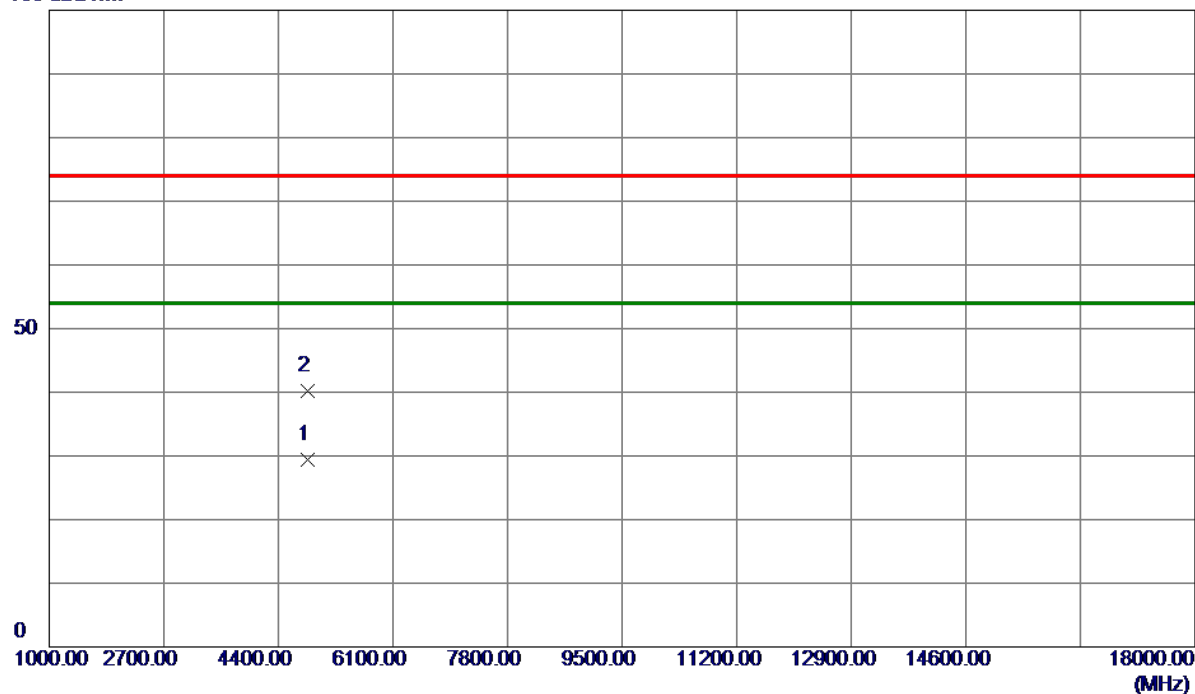


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4833.6269    | 25.89                      | 3.44                    | 29.33                     | 54.00           | -24.67       | AVG      |         |
| 2   | 4834.6910    | 36.85                      | 3.44                    | 40.29                     | 74.00           | -33.71       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT20) Mode 2437 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

130 dBuV/m

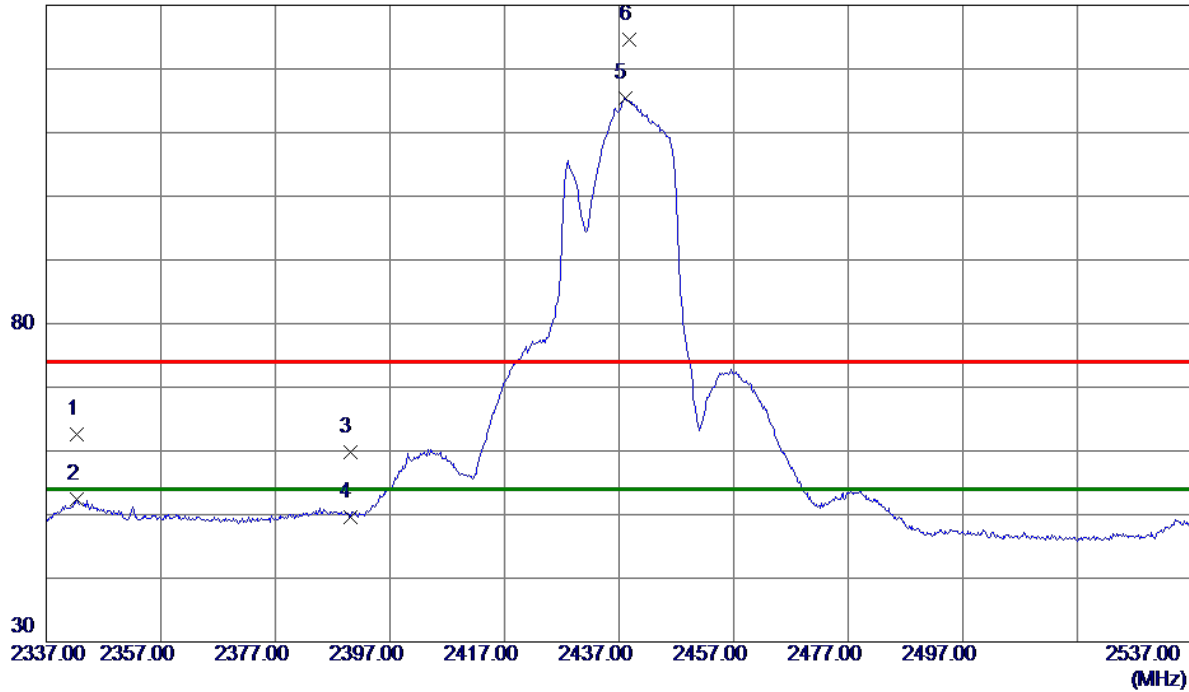

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2342.4000    | 54.56                      | 8.02                    | 62.58                     | 74.00           | -11.42       | Peak     |          |
| 2   | 2342.4000    | 44.38                      | 8.02                    | 52.40                     | 54.00           | -1.60        | AVG      |          |
| 3   | 2390.0000    | 51.70                      | 8.05                    | 59.75                     | 74.00           | -14.25       | Peak     |          |
| 4   | 2390.0000    | 41.64                      | 8.05                    | 49.69                     | 54.00           | -4.31        | AVG      |          |
| 5 * | 2438.0000    | 107.41                     | 8.08                    | 115.49                    | 54.00           | 61.49        | AVG      | No Limit |
| 6   | 2438.8000    | 116.55                     | 8.08                    | 124.63                    | 74.00           | 50.63        | Peak     | No Limit |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT20) Mode 2437 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

100 dBuV/m

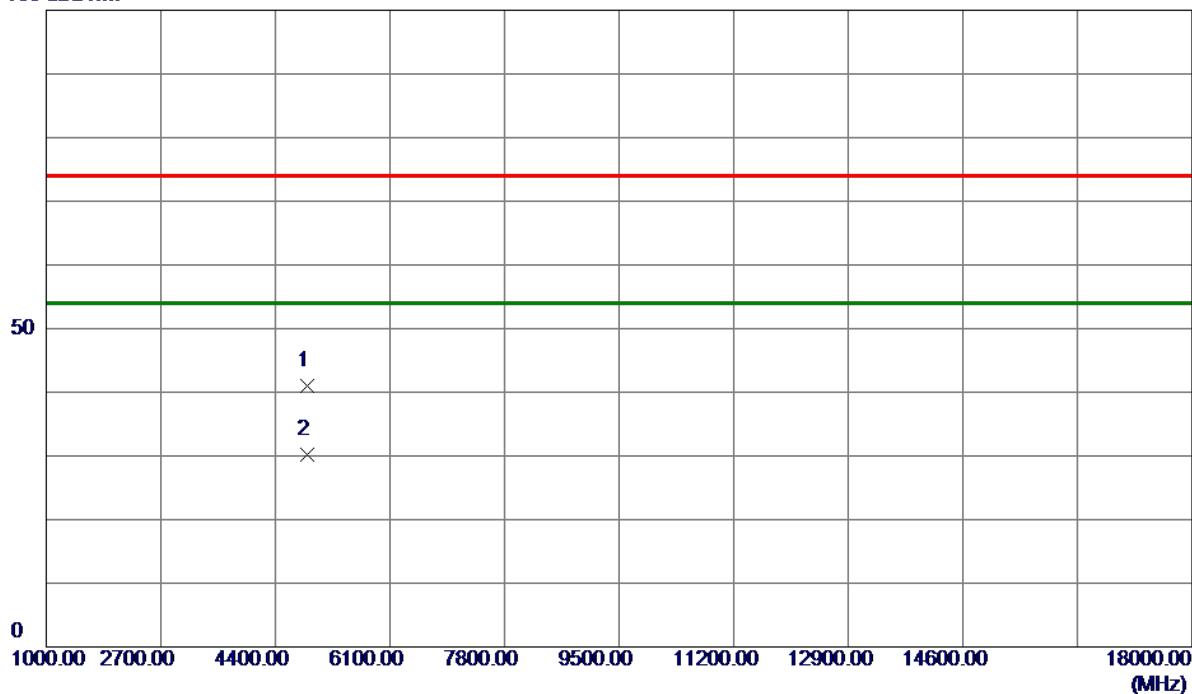

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4874.1509    | 37.45                      | 3.58                    | 41.03                     | 74.00           | -32.97       | Peak     |         |
| 2 * | 4874.2750    | 26.55                      | 3.58                    | 30.13                     | 54.00           | -23.87       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT20) Mode 2457 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

130 dBuV/m

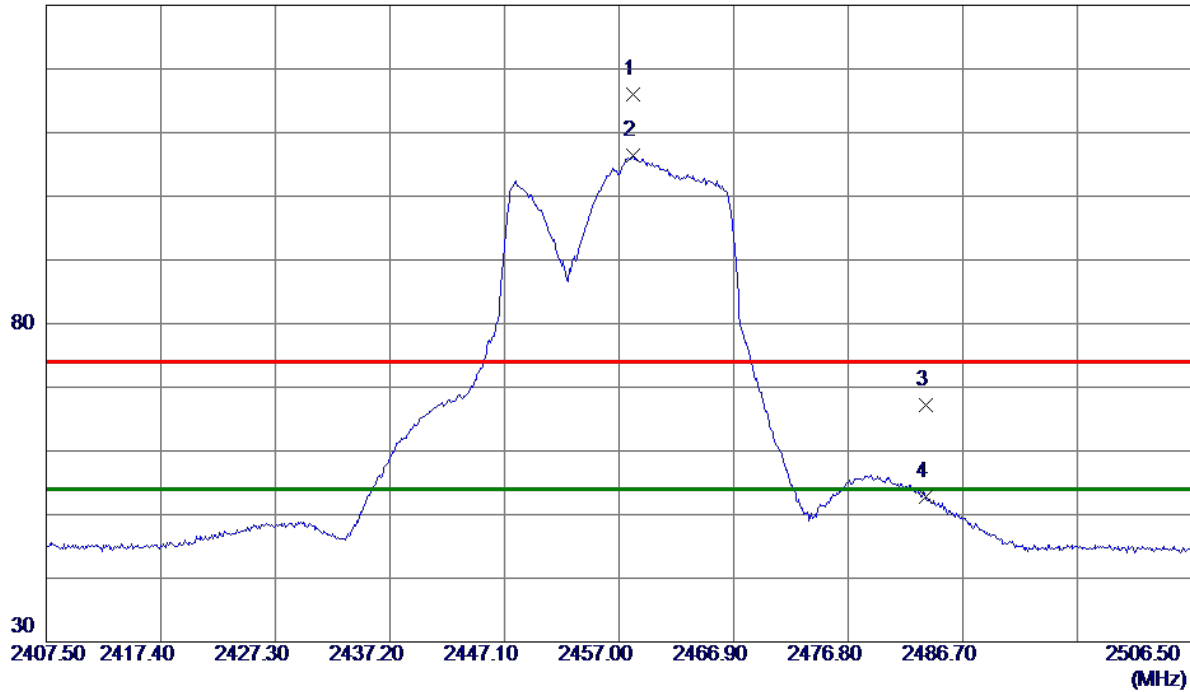

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2458.1880    | 107.85                     | 8.09                    | 115.94                    | 74.00           | 41.94        | Peak     | No Limit |
| 2 * | 2458.1880    | 98.34                      | 8.09                    | 106.43                    | 54.00           | 52.43        | AVG      | No Limit |
| 3   | 2483.5000    | 59.02                      | 8.11                    | 67.13                     | 74.00           | -6.87        | Peak     |          |
| 4   | 2483.5000    | 44.67                      | 8.11                    | 52.78                     | 54.00           | -1.22        | AVG      |          |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT20) Mode 2457 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

100 dBuV/m

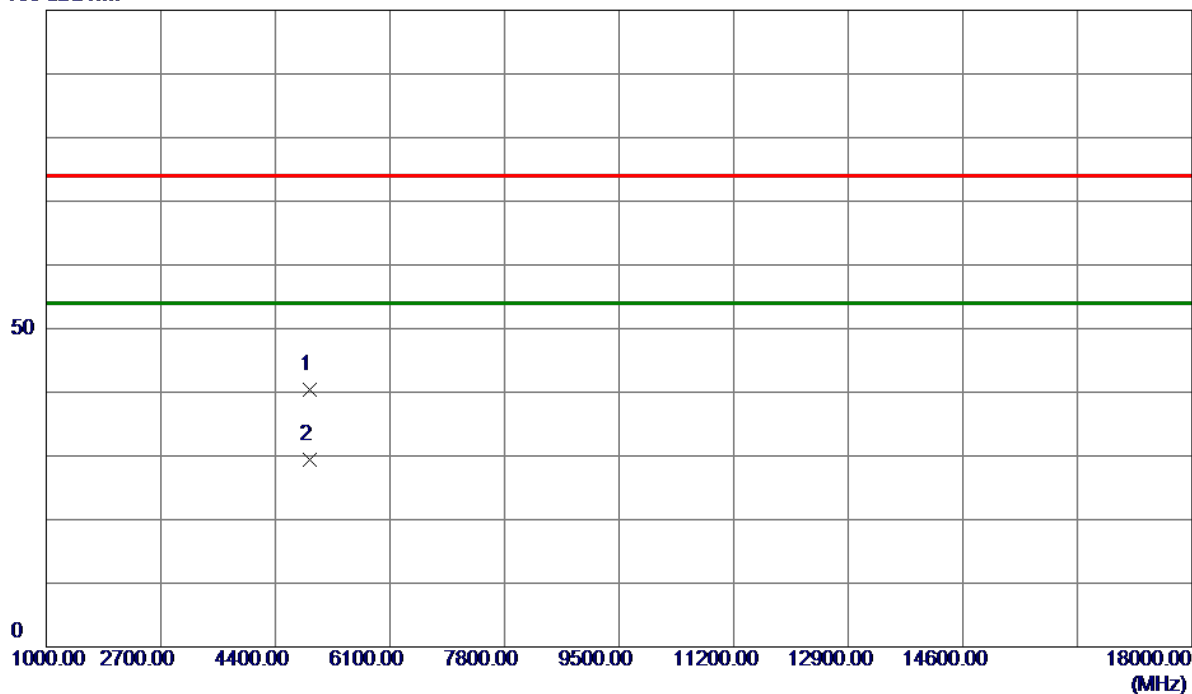


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4913.4420    | 36.60                      | 3.72                    | 40.32                     | 74.00           | -33.68       | Peak     |         |
| 2 * | 4913.5160    | 25.61                      | 3.72                    | 29.33                     | 54.00           | -24.67       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT20) Mode 2462 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

130 dBuV/m

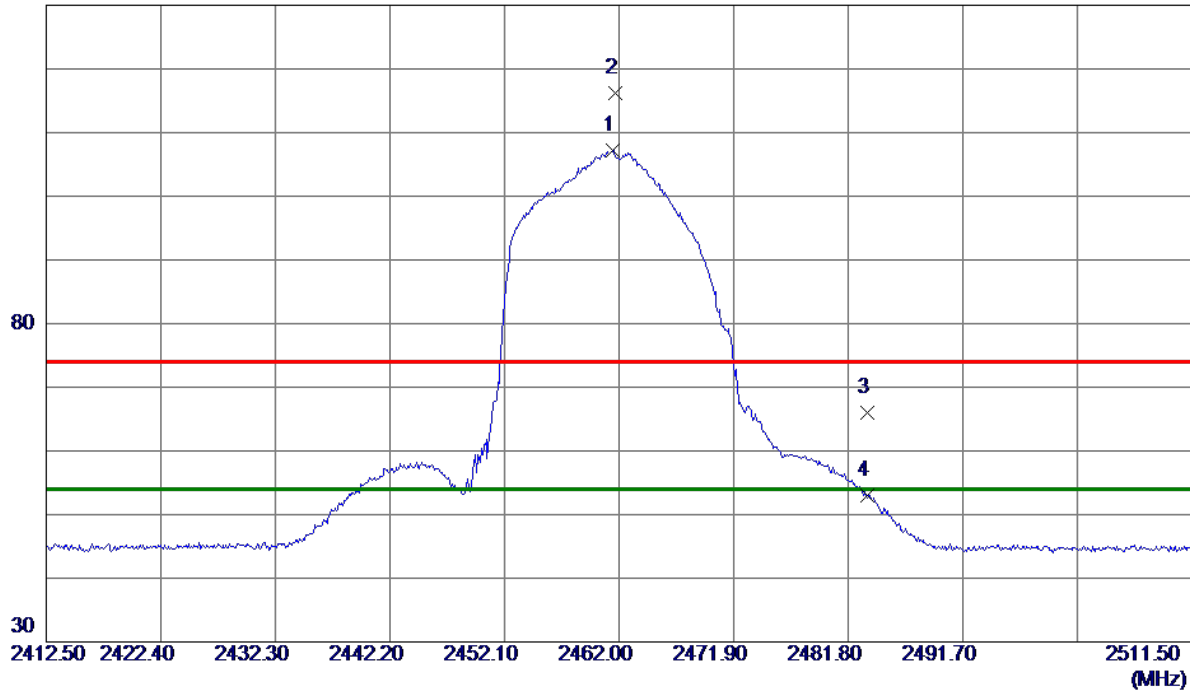


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 2461.5049    | 99.14                      | 8.10                    | 107.24                    | 54.00           | 53.24        | AVG      | No Limit |
| 2   | 2461.7030    | 108.04                     | 8.10                    | 116.14                    | 74.00           | 42.14        | Peak     | No Limit |
| 3   | 2483.5000    | 57.90                      | 8.11                    | 66.01                     | 74.00           | -7.99        | Peak     |          |
| 4   | 2483.5000    | 44.98                      | 8.11                    | 53.09                     | 54.00           | -0.91        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT20) Mode 2462 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

100 dBuV/m

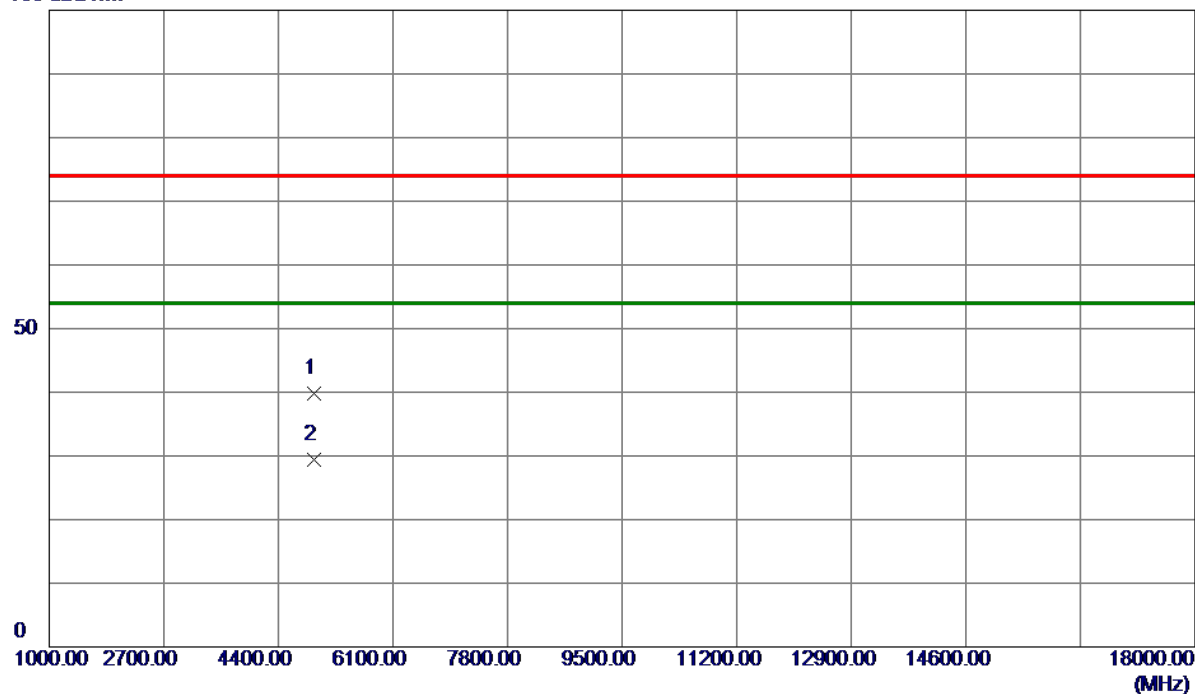


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4924.1589    | 36.02                      | 3.76                    | 39.78                     | 74.00           | -34.22       | Peak     |         |
| 2 * | 4924.3070    | 25.69                      | 3.76                    | 29.45                     | 54.00           | -24.55       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT40) Mode 2422 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

130 dBuV/m

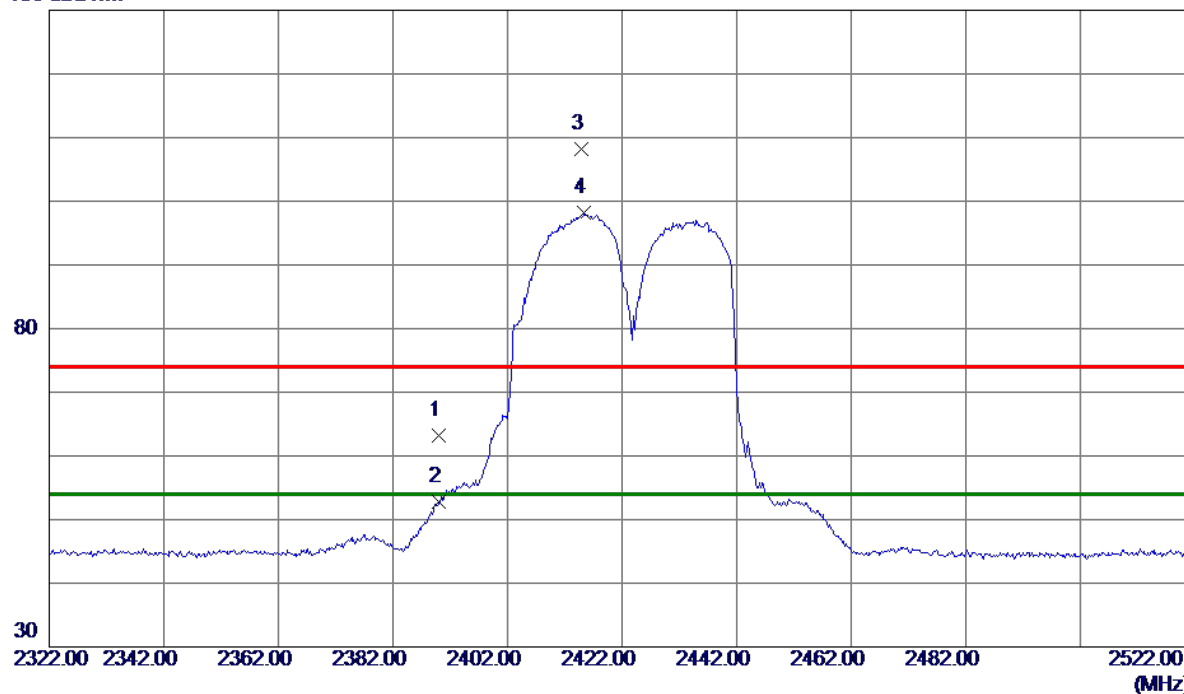


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 55.23                      | 8.05                    | 63.28                     | 74.00           | -10.72       | Peak     |          |
| 2   | 2390.0000    | 44.74                      | 8.05                    | 52.79                     | 54.00           | -1.21        | AVG      |          |
| 3   | 2414.8000    | 100.09                     | 8.07                    | 108.16                    | 74.00           | 34.16        | Peak     | No Limit |
| 4 * | 2415.4000    | 90.06                      | 8.07                    | 98.13                     | 54.00           | 44.13        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT40) Mode 2422 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

100 dBuV/m

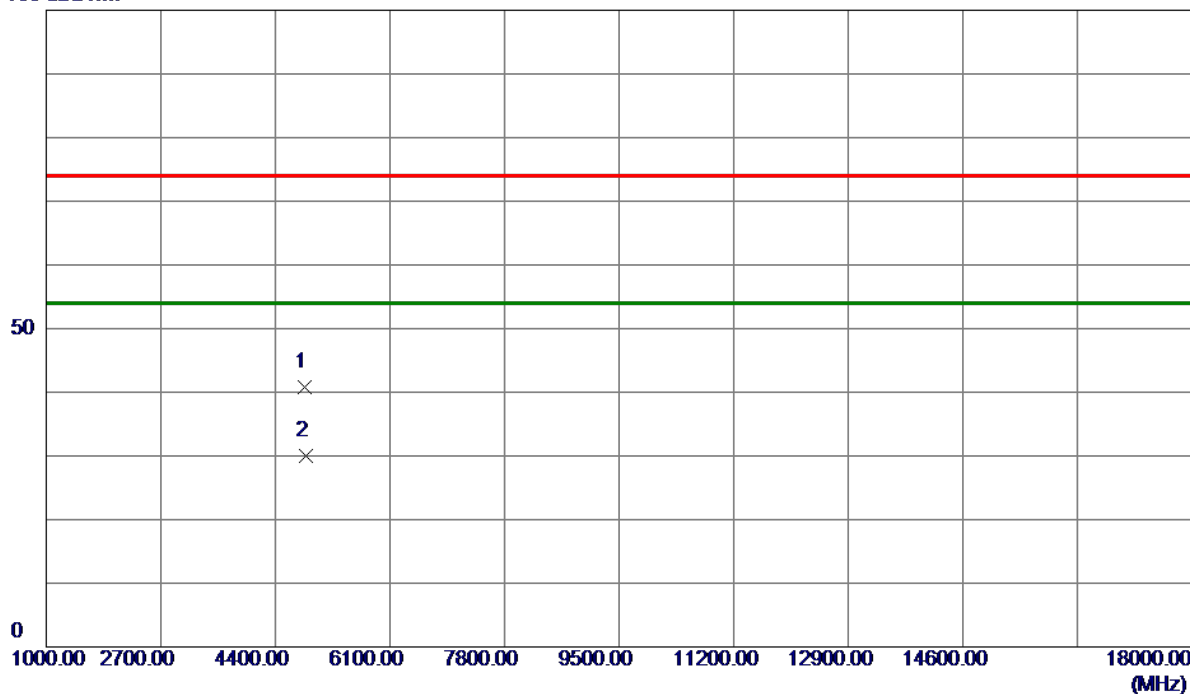

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4843.4650    | 37.29                      | 3.48                    | 40.77                     | 74.00           | -33.23       | Peak     |         |
| 2 * | 4844.3950    | 26.44                      | 3.48                    | 29.92                     | 54.00           | -24.08       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT40) Mode 2427 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

130 dBuV/m

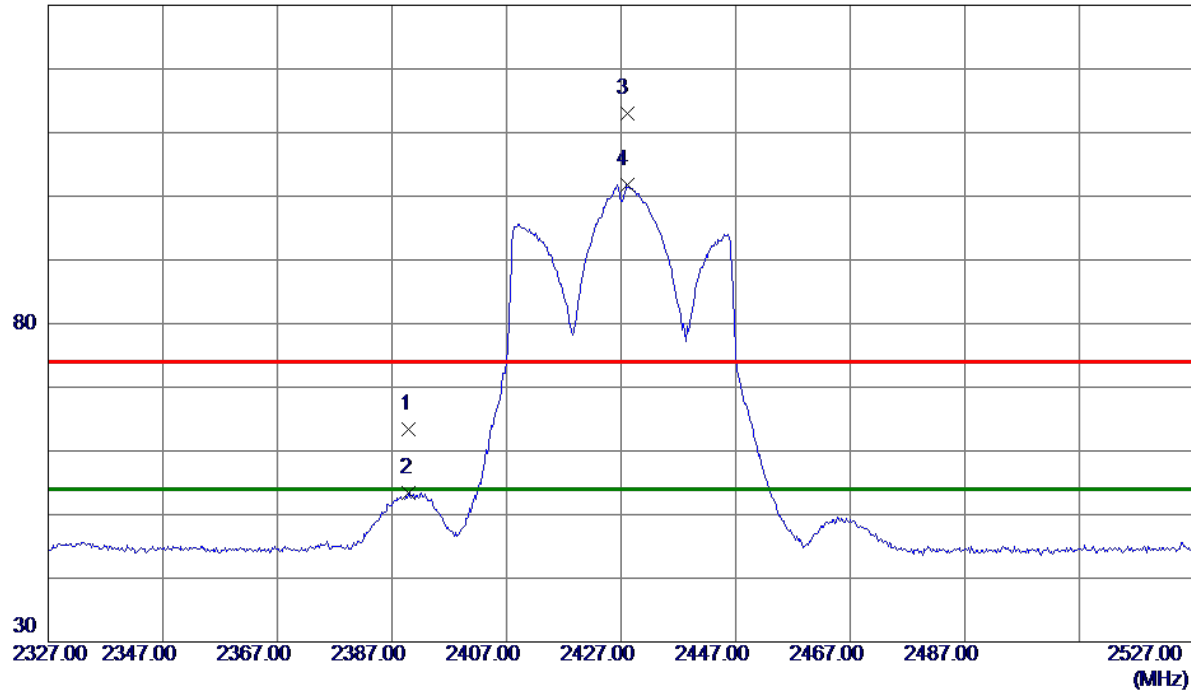


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 55.30                      | 8.05                    | 63.35                     | 74.00           | -10.65       | Peak     |          |
| 2   | 2390.0000    | 45.36                      | 8.05                    | 53.41                     | 54.00           | -0.59        | AVG      |          |
| 3   | 2428.0000    | 104.89                     | 8.07                    | 112.96                    | 74.00           | 38.96        | Peak     | No Limit |
| 4 * | 2428.0000    | 93.75                      | 8.07                    | 101.82                    | 54.00           | 47.82        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT40) Mode 2427 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

100 dBuV/m

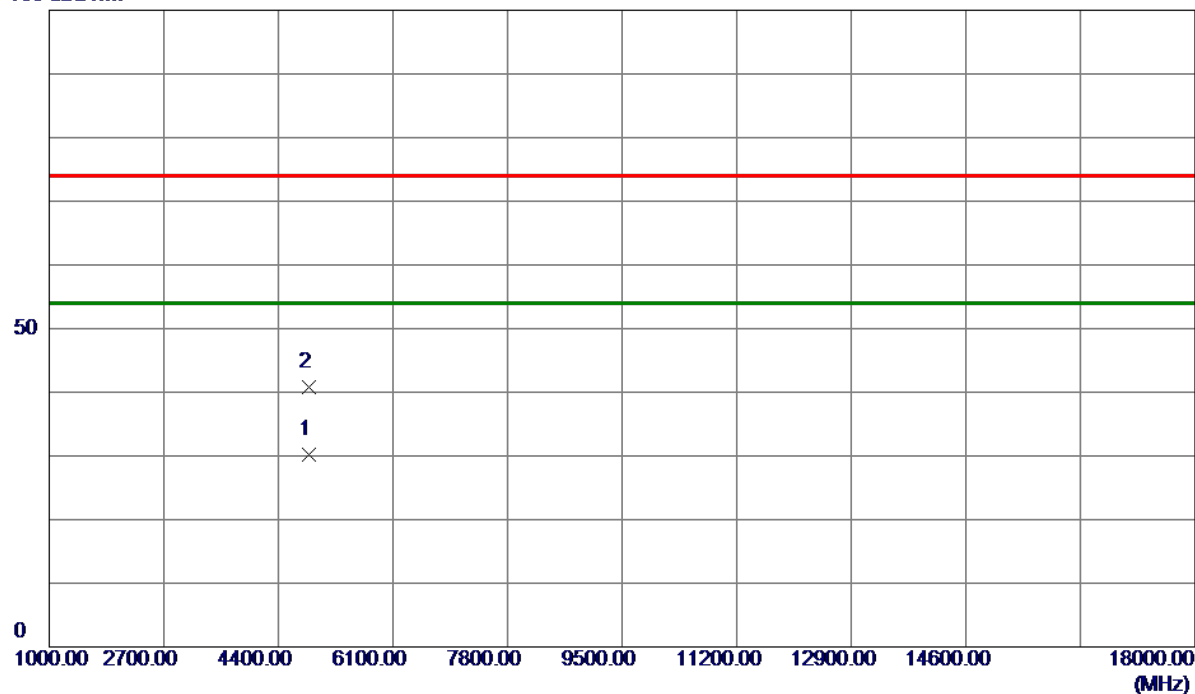


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4854.4089    | 26.64                      | 3.51                    | 30.15                     | 54.00           | -23.85       | AVG      |         |
| 2   | 4854.6720    | 37.25                      | 3.51                    | 40.76                     | 74.00           | -33.24       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT40) Mode 2437 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

130 dBuV/m

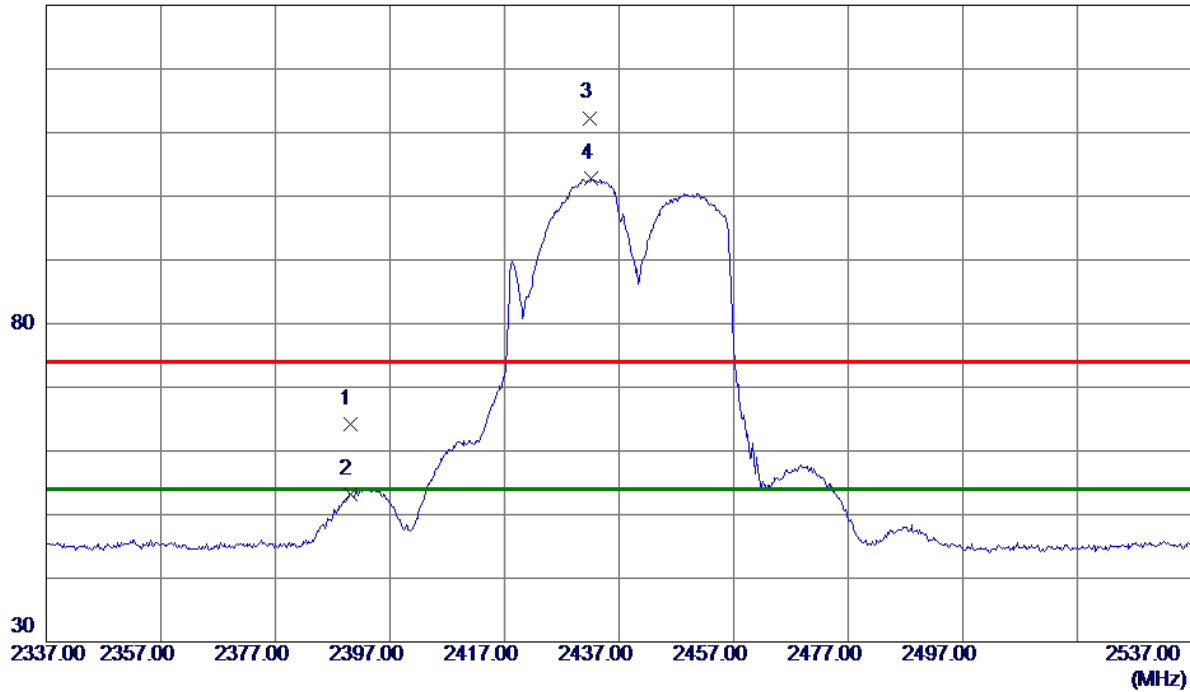


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 56.22                      | 8.05                    | 64.27                     | 74.00           | -9.73        | Peak     |          |
| 2   | 2390.0000    | 45.20                      | 8.05                    | 53.25                     | 54.00           | -0.75        | AVG      |          |
| 3   | 2431.8000    | 104.22                     | 8.08                    | 112.30                    | 74.00           | 38.30        | Peak     | No Limit |
| 4 * | 2432.2000    | 94.74                      | 8.08                    | 102.82                    | 54.00           | 48.82        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT40) Mode 2437 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

100 dBuV/m

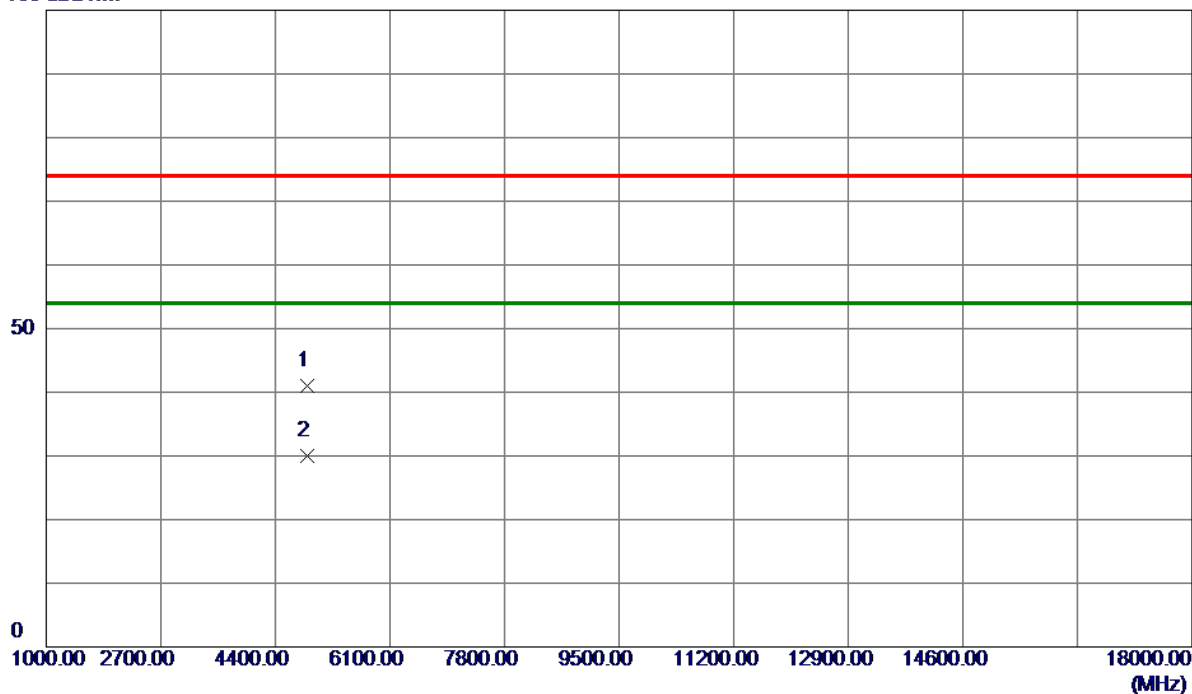

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4873.2550    | 37.37                      | 3.58                    | 40.95                     | 74.00           | -33.05       | Peak     |         |
| 2 * | 4873.9350    | 26.49                      | 3.58                    | 30.07                     | 54.00           | -23.93       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT40) Mode 2447 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

130 dBuV/m

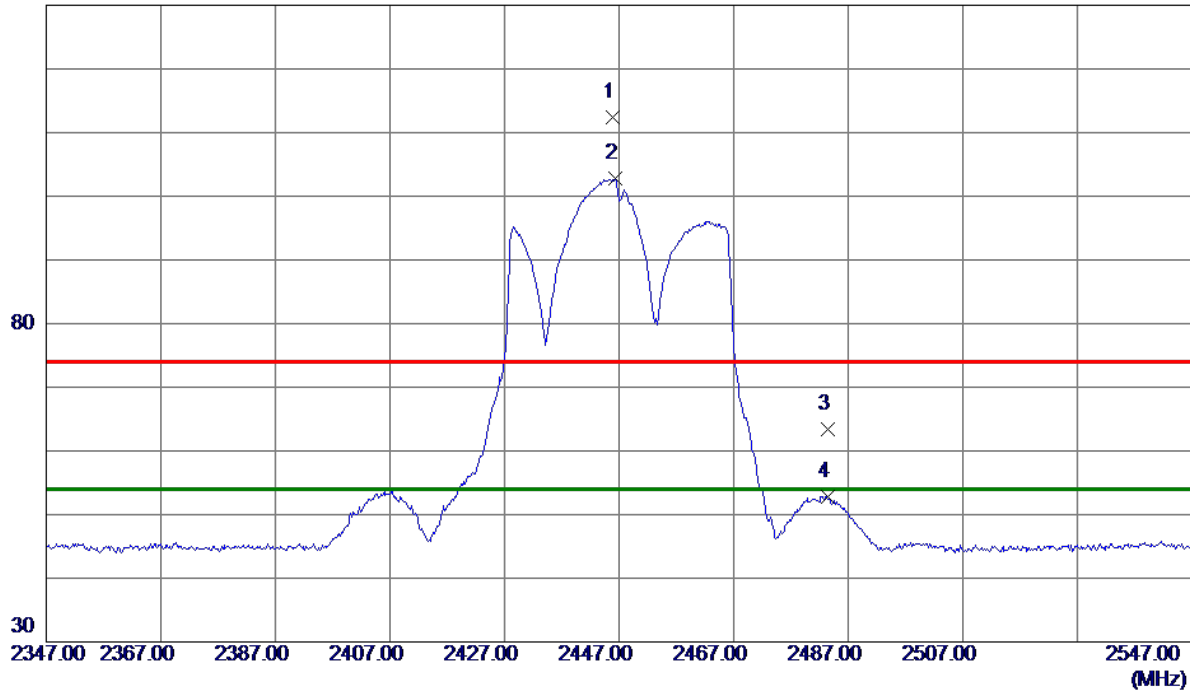

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2445.8000    | 104.33                     | 8.09                    | 112.42                    | 74.00           | 38.42        | Peak     | No Limit |
| 2 * | 2446.4000    | 94.74                      | 8.09                    | 102.83                    | 54.00           | 48.83        | AVG      | No Limit |
| 3   | 2483.5000    | 55.29                      | 8.11                    | 63.40                     | 74.00           | -10.60       | Peak     |          |
| 4   | 2483.5000    | 44.73                      | 8.11                    | 52.84                     | 54.00           | -1.16        | AVG      |          |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT40) Mode 2447 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

100 dBuV/m

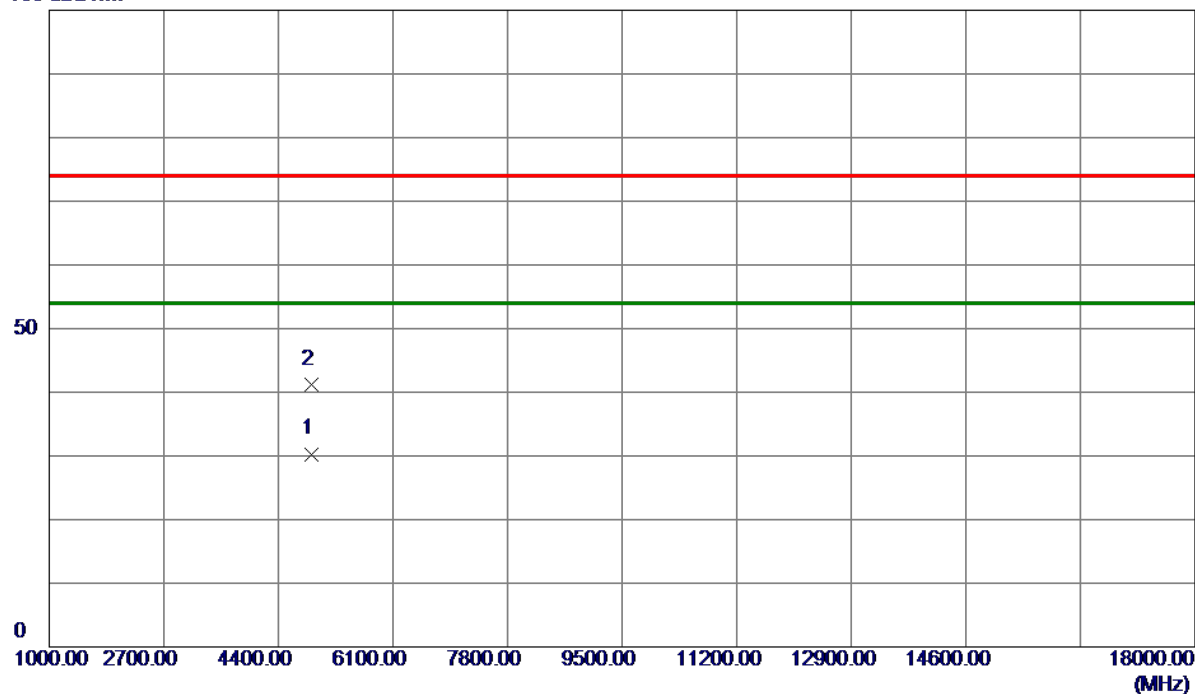

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4893.6389    | 26.65                      | 3.65                    | 30.30                     | 54.00           | -23.70       | AVG      |         |
| 2   | 4894.2440    | 37.54                      | 3.65                    | 41.19                     | 74.00           | -32.81       | Peak     |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT40) Mode 2452 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

130 dBuV/m

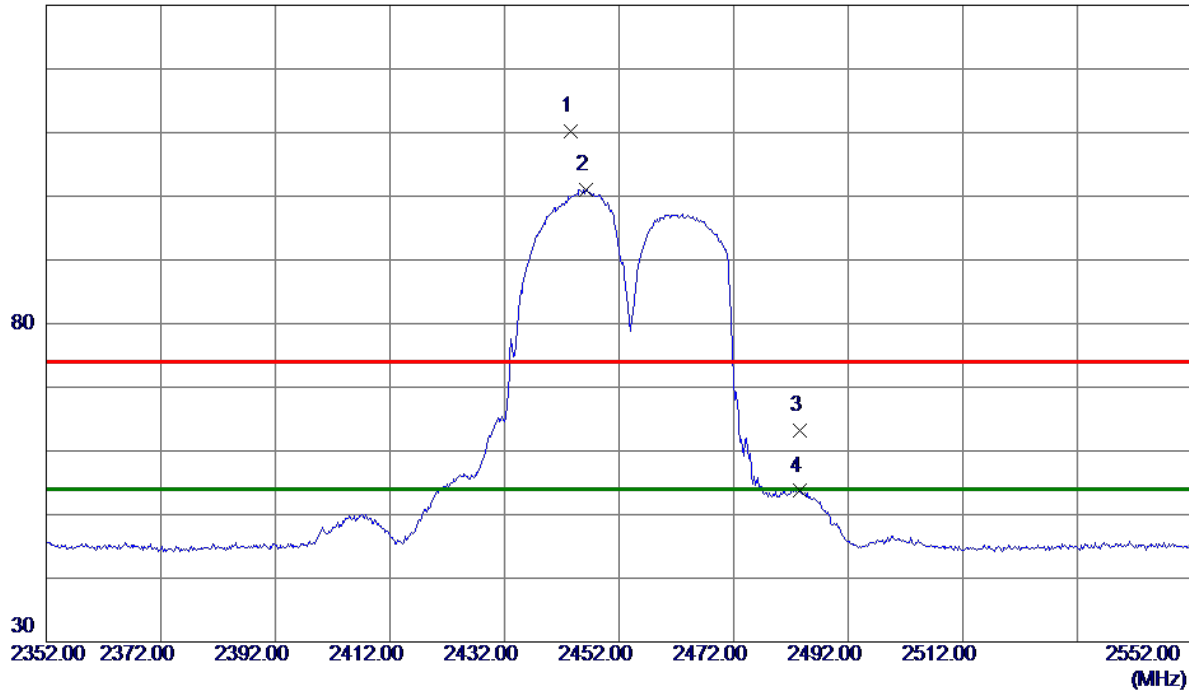


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2443.6000    | 102.15                     | 8.08                    | 110.23                    | 74.00           | 36.23        | Peak     | No Limit |
| 2 * | 2446.2000    | 92.88                      | 8.09                    | 100.97                    | 54.00           | 46.97        | AVG      | No Limit |
| 3   | 2483.5000    | 55.09                      | 8.11                    | 63.20                     | 74.00           | -10.80       | Peak     |          |
| 4   | 2483.5000    | 45.59                      | 8.11                    | 53.70                     | 54.00           | -0.30        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT40) Mode 2452 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

100 dBuV/m

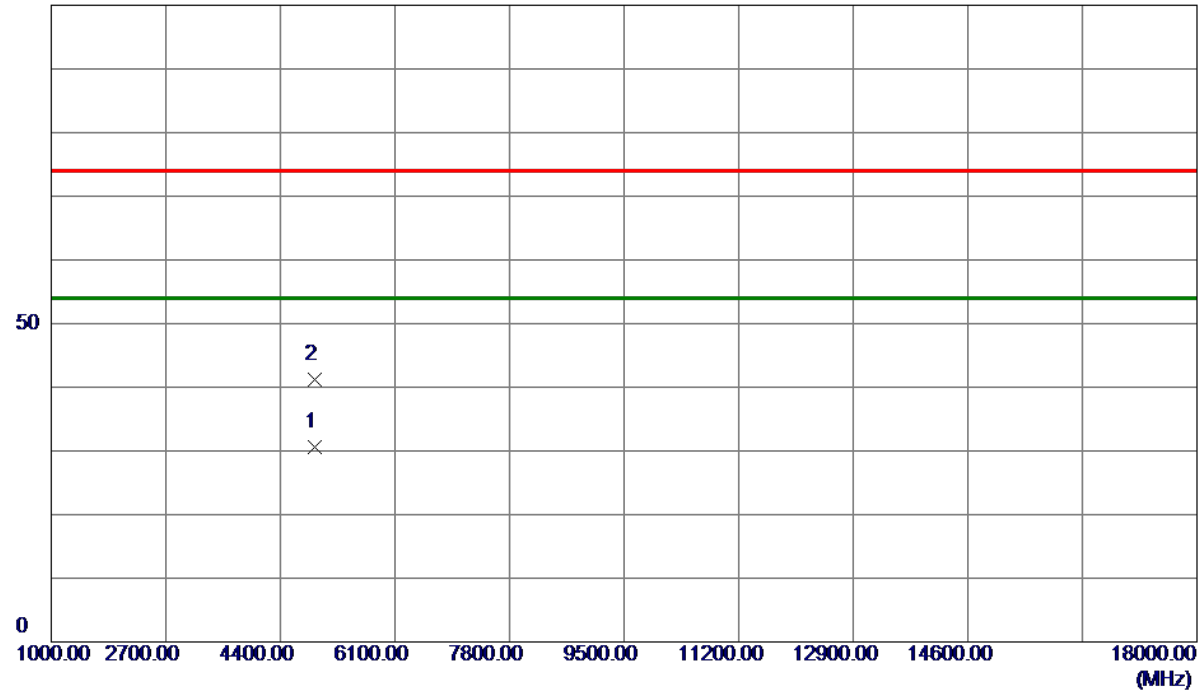


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4903.9310    | 26.82                      | 3.69                    | 30.51                     | 54.00           | -23.49       | AVG      |         |
| 2   | 4904.1349    | 37.47                      | 3.69                    | 41.16                     | 74.00           | -32.84       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX B Mode 2437 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

86.9 dBuV/m

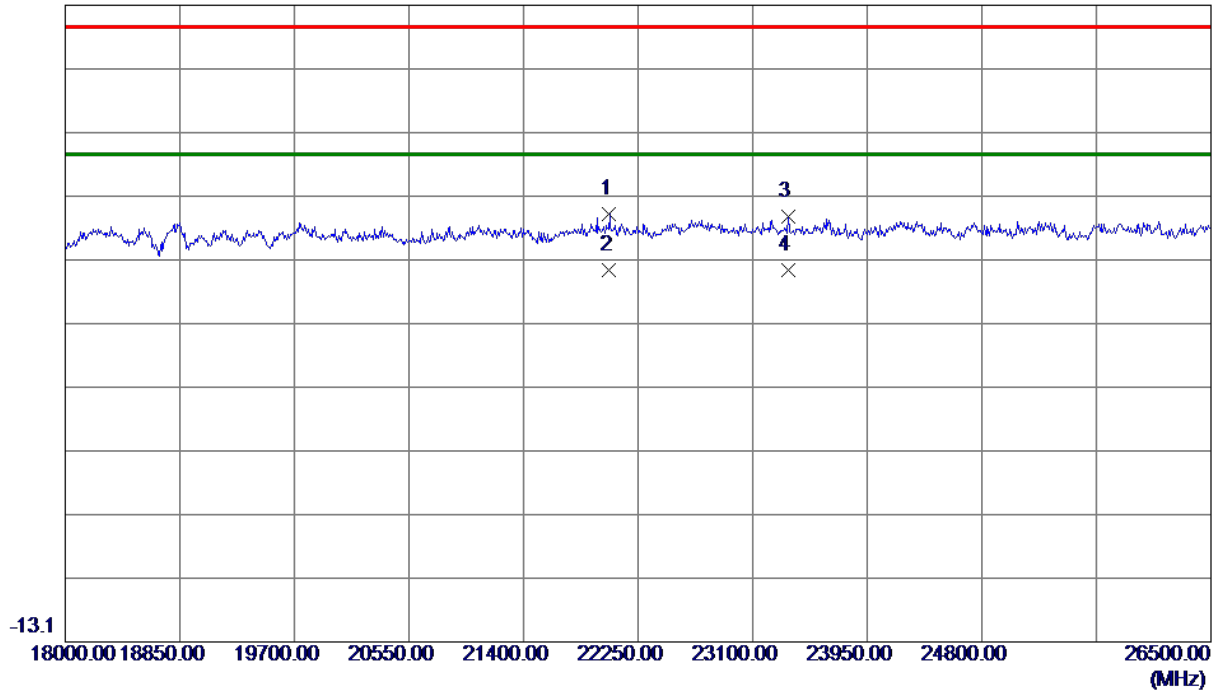

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 22037.5000   | 49.89                      | 4.15                    | 54.04                     | 83.50           | -29.46       | Peak     |         |
| 2 * | 22037.5000   | 41.24                      | 4.15                    | 45.39                     | 63.50           | -18.11       | AVG      |         |
| 3   | 23363.5000   | 48.86                      | 4.79                    | 53.65                     | 83.50           | -29.85       | Peak     |         |
| 4   | 23363.5000   | 40.59                      | 4.79                    | 45.38                     | 63.50           | -18.12       | AVG      |         |


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX B Mode 2437 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

86.9 dBuV/m

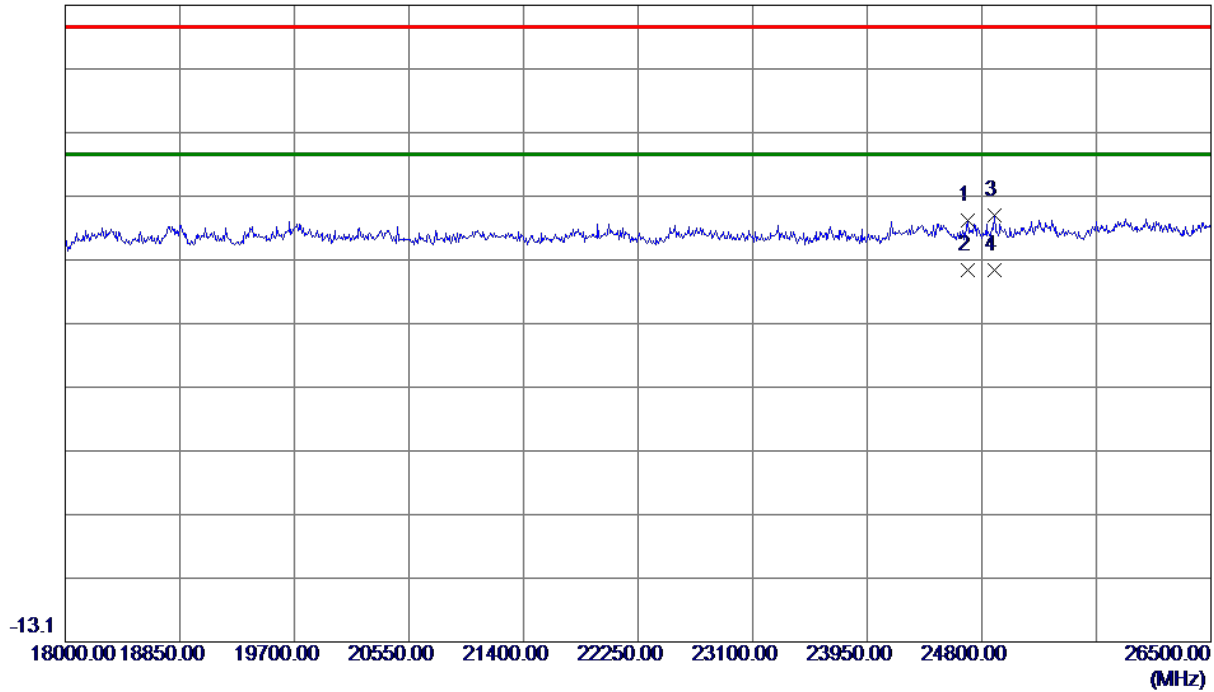


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 24698.0000   | 47.62                      | 5.48                    | 53.10                     | 83.50           | -30.40       | Peak     |         |
| 2   | 24698.0000   | 39.79                      | 5.48                    | 45.27                     | 63.50           | -18.23       | AVG      |         |
| 3   | 24893.5000   | 48.67                      | 5.22                    | 53.89                     | 83.50           | -29.61       | Peak     |         |
| 4 * | 24893.5000   | 40.13                      | 5.22                    | 45.35                     | 63.50           | -18.15       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**Worst case:**

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX B Mode 2437 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

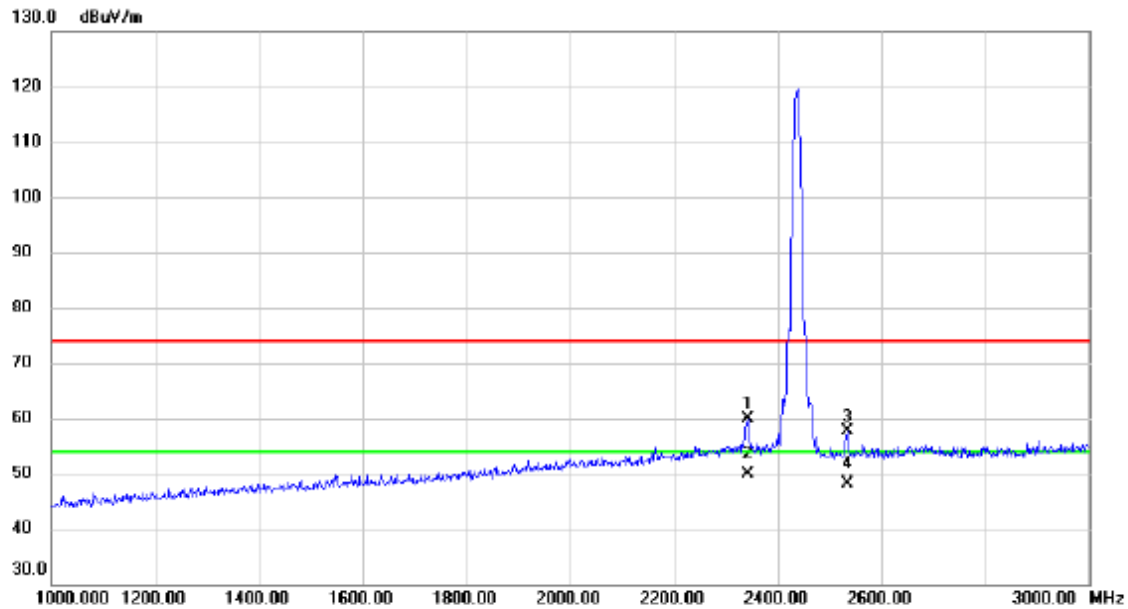


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 2342.000     | 51.83                    | 8.02                    | 59.85                      | 74.00           | -14.15       | peak     |         |
| 2   | *   | 2342.000     | 41.91                    | 8.02                    | 49.93                      | 54.00           | -4.07        | AVG      |         |
| 3   |     | 2534.000     | 49.33                    | 8.28                    | 57.61                      | 74.00           | -16.39       | peak     |         |
| 4   |     | 2534.000     | 39.83                    | 8.28                    | 48.11                      | 54.00           | -5.89        | AVG      |         |

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX B Mode 2437 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

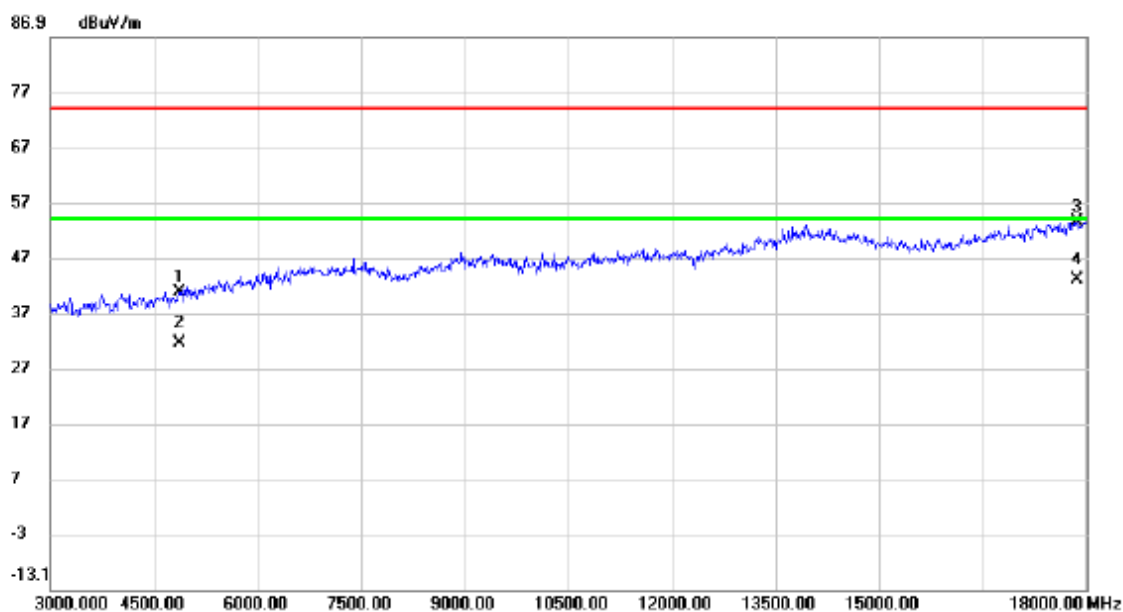

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 4874.426     | 37.31                    | 3.59                    | 40.90                      | 74.00           | -33.10       | peak     |         |
| 2   |     | 4874.770     | 27.97                    | 3.59                    | 31.56                      | 54.00           | -22.44       | AVG      |         |
| 3   |     | 17865.000    | 37.87                    | 15.65                   | 53.52                      | 74.00           | -20.48       | peak     |         |
| 4   | *   | 17865.000    | 27.37                    | 15.65                   | 43.02                      | 54.00           | -10.98       | AVG      |         |

## REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

## Directional Antenna

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX B Mode 2412 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

130 dBuV/m

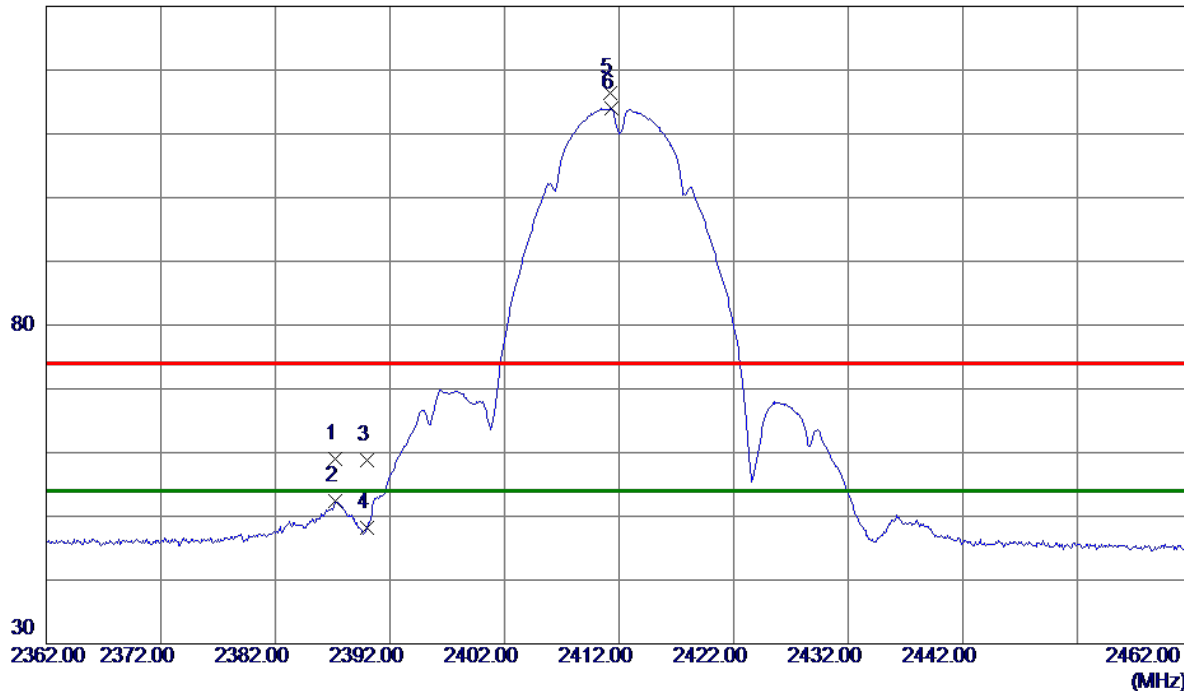

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2387.2000    | 50.95                      | 8.05                    | 59.00                     | 74.00           | -15.00       | Peak     |          |
| 2   | 2387.2000    | 44.30                      | 8.05                    | 52.35                     | 54.00           | -1.65        | AVG      |          |
| 3   | 2390.0000    | 50.70                      | 8.05                    | 58.75                     | 74.00           | -15.25       | Peak     |          |
| 4   | 2390.0000    | 40.08                      | 8.05                    | 48.13                     | 54.00           | -5.87        | AVG      |          |
| 5   | 2411.2000    | 108.32                     | 8.06                    | 116.38                    | 74.00           | 42.38        | Peak     | No Limit |
| 6 * | 2411.3000    | 105.98                     | 8.06                    | 114.04                    | 54.00           | 60.04        | AVG      | No Limit |


### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX B Mode 2412 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

100 dBuV/m

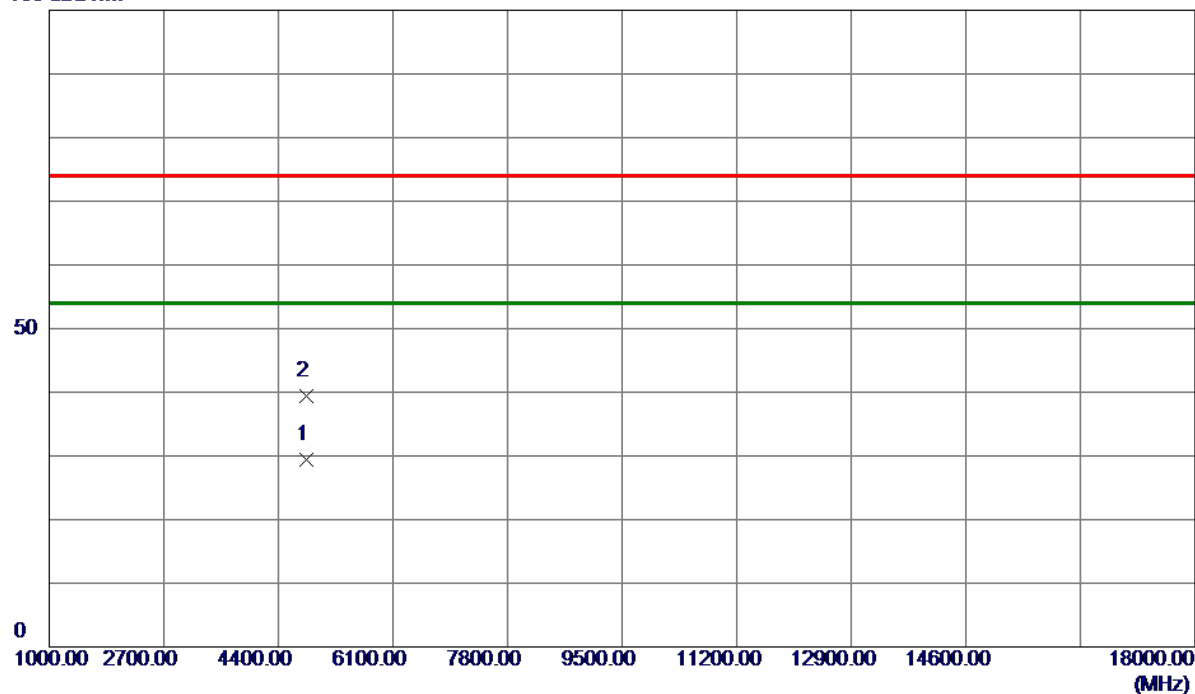


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4815.0200    | 26.02                      | 3.38                    | 29.40                     | 54.00           | -24.60       | AVG      |         |
| 2   | 4817.5800    | 35.99                      | 3.39                    | 39.38                     | 74.00           | -34.62       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX B Mode 2417 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

130 dBuV/m

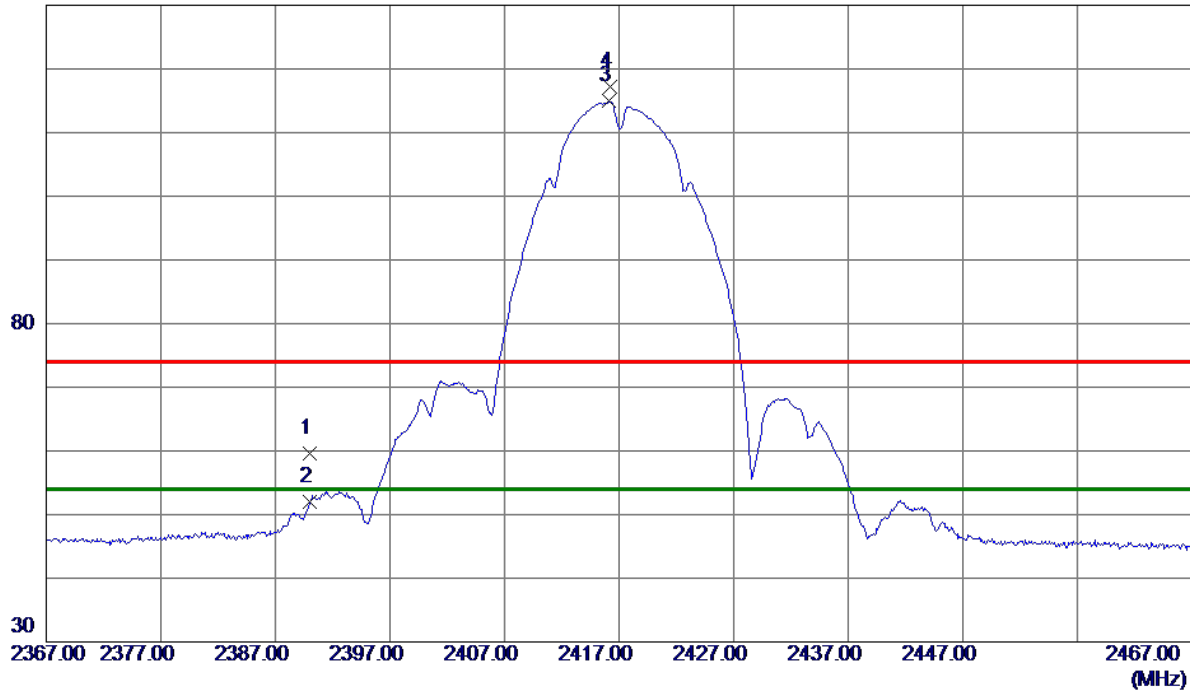

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 51.56                      | 8.05                    | 59.61                     | 74.00           | -14.39       | Peak     |          |
| 2   | 2390.0000    | 43.96                      | 8.05                    | 52.01                     | 54.00           | -1.99        | AVG      |          |
| 3 * | 2416.1000    | 106.83                     | 8.07                    | 114.90                    | 54.00           | 60.90        | AVG      | No Limit |
| 4   | 2416.2000    | 109.09                     | 8.07                    | 117.16                    | 74.00           | 43.16        | Peak     | No Limit |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX B Mode 2417 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

100 dBuV/m

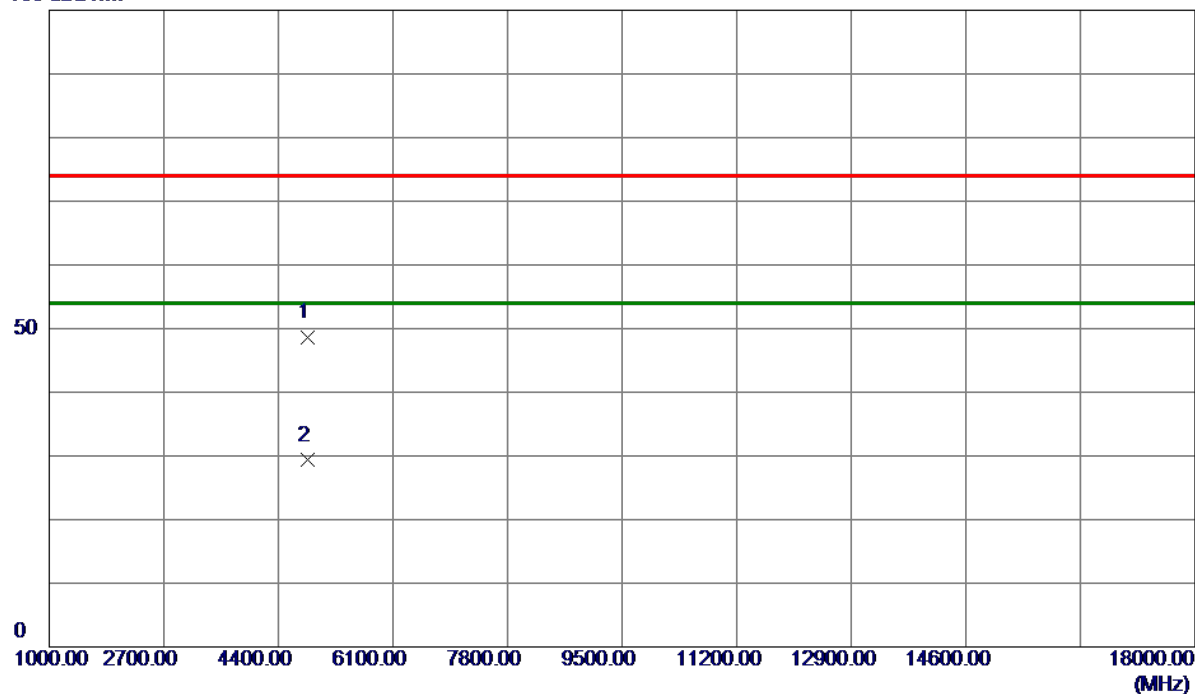

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4833.7400    | 45.22                      | 3.44                    | 48.66                     | 74.00           | -25.34       | Peak     |         |
| 2 * | 4839.9600    | 25.84                      | 3.46                    | 29.30                     | 54.00           | -24.70       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX B Mode 2437 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

130 dBuV/m

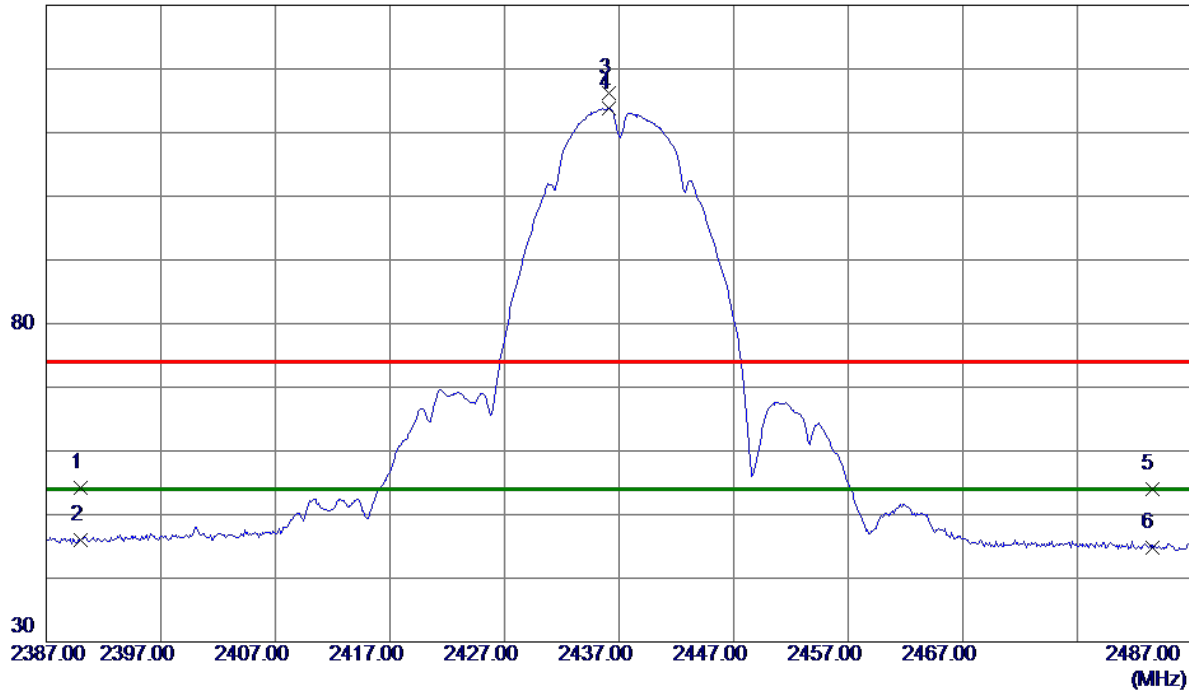

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 46.10                      | 8.05                    | 54.15                     | 74.00           | -19.85       | Peak     |          |
| 2   | 2390.0000    | 37.90                      | 8.05                    | 45.95                     | 54.00           | -8.05        | AVG      |          |
| 3   | 2436.1000    | 108.03                     | 8.08                    | 116.11                    | 74.00           | 42.11        | Peak     | No Limit |
| 4 * | 2436.1000    | 105.74                     | 8.08                    | 113.82                    | 54.00           | 59.82        | AVG      | No Limit |
| 5   | 2483.5000    | 45.90                      | 8.11                    | 54.01                     | 74.00           | -19.99       | Peak     |          |
| 6   | 2483.5000    | 36.70                      | 8.11                    | 44.81                     | 54.00           | -9.19        | AVG      |          |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX B Mode 2437 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

100 dBuV/m

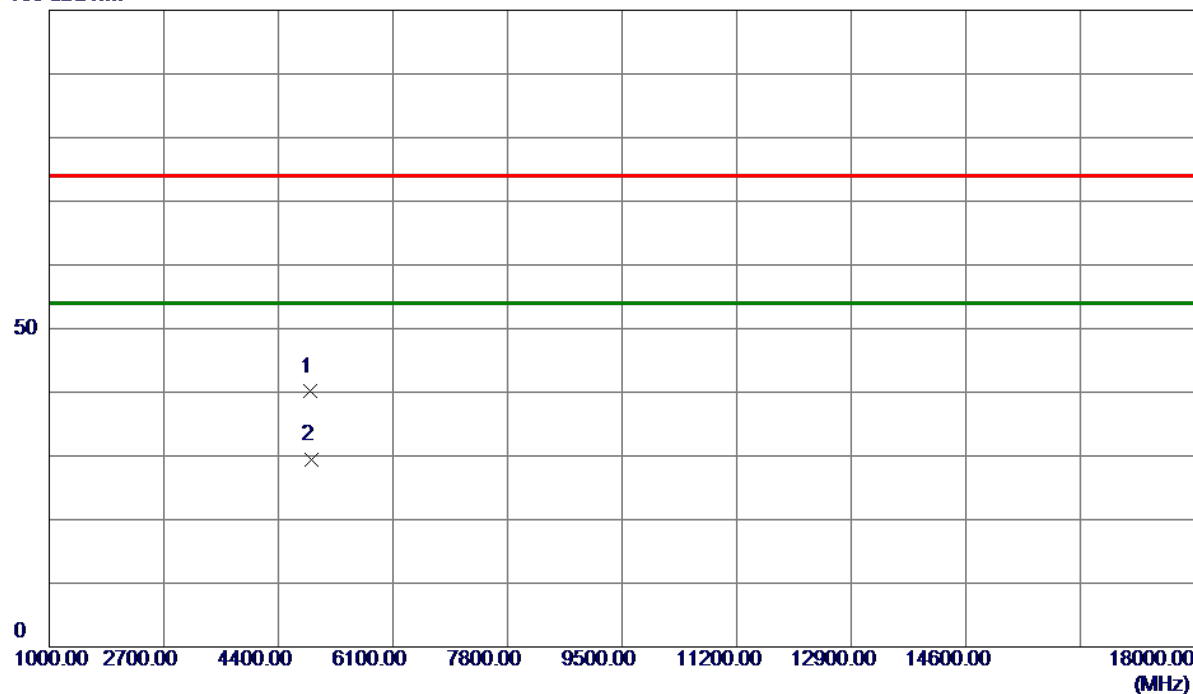

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4879.1000    | 36.50                      | 3.60                    | 40.10                     | 74.00           | -33.90       | Peak     |         |
| 2 * | 4883.1200    | 25.85                      | 3.61                    | 29.46                     | 54.00           | -24.54       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX B Mode 2457 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

130 dBuV/m

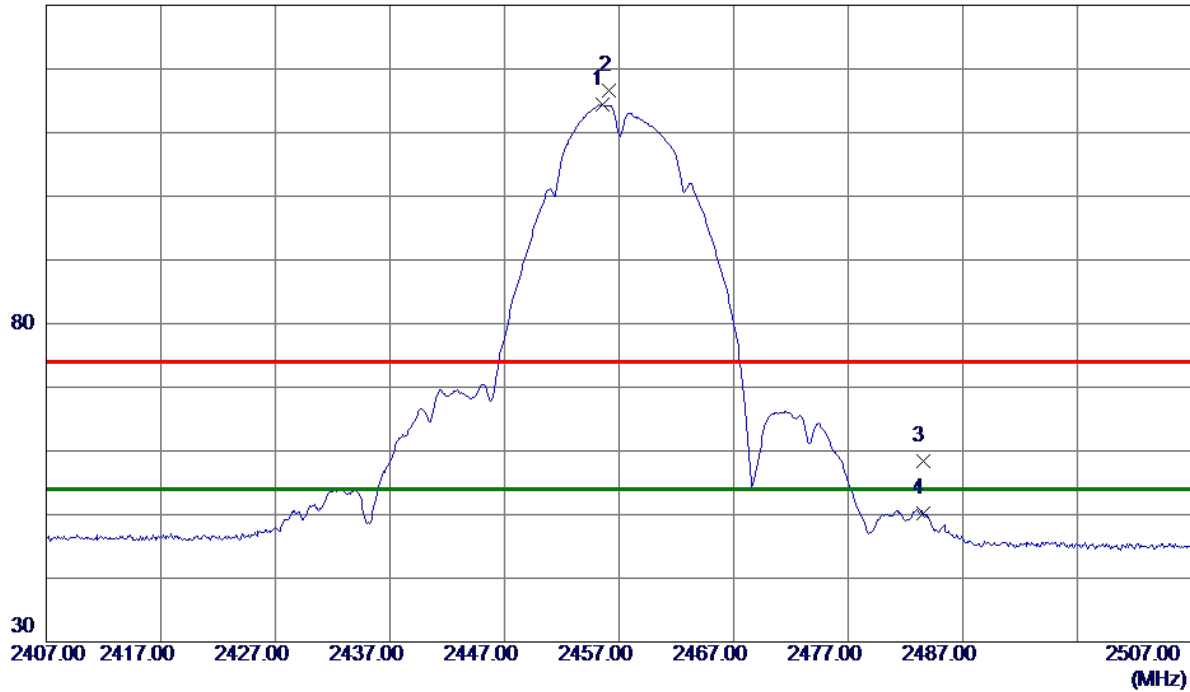


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 2455.5000    | 106.32                     | 8.09                    | 114.41                    | 54.00           | 60.41        | AVG      | No Limit |
| 2   | 2456.1000    | 108.54                     | 8.09                    | 116.63                    | 74.00           | 42.63        | Peak     | No Limit |
| 3   | 2483.5000    | 50.34                      | 8.11                    | 58.45                     | 74.00           | -15.55       | Peak     |          |
| 4   | 2483.5000    | 42.05                      | 8.11                    | 50.16                     | 54.00           | -3.84        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX B Mode 2457 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

100 dBuV/m

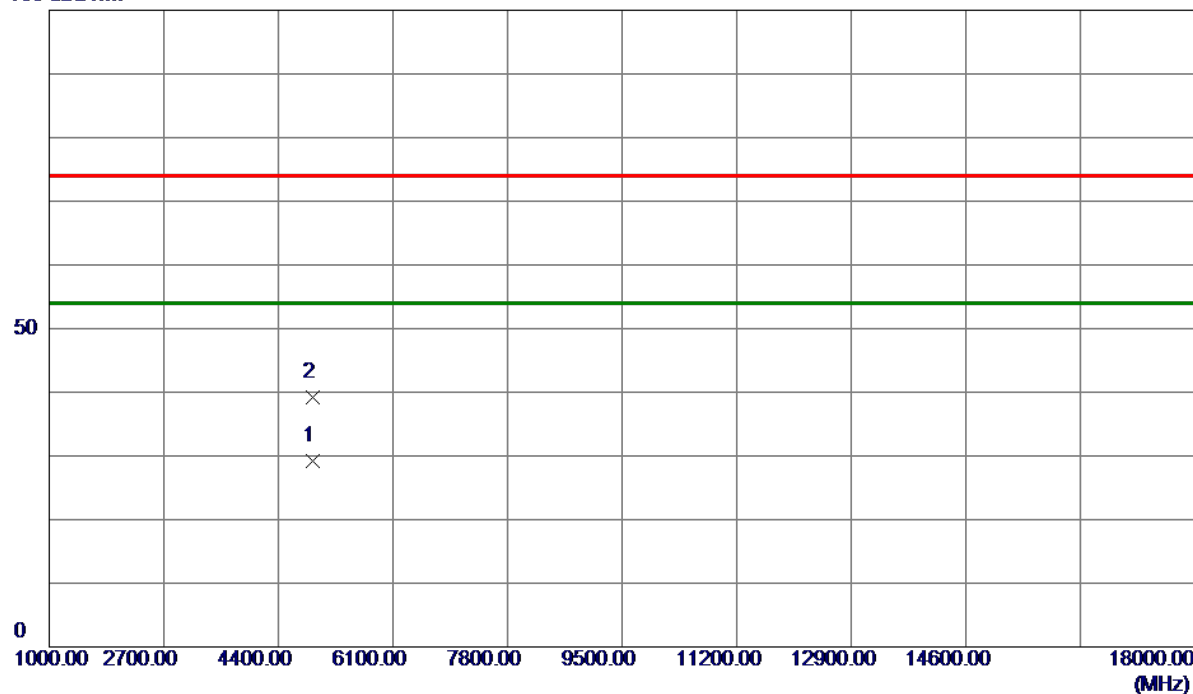


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4908.2400    | 25.53                      | 3.70                    | 29.23                     | 54.00           | -24.77       | AVG      |         |
| 2   | 4909.4400    | 35.59                      | 3.70                    | 39.29                     | 74.00           | -34.71       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX B Mode 2462 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

130 dBuV/m

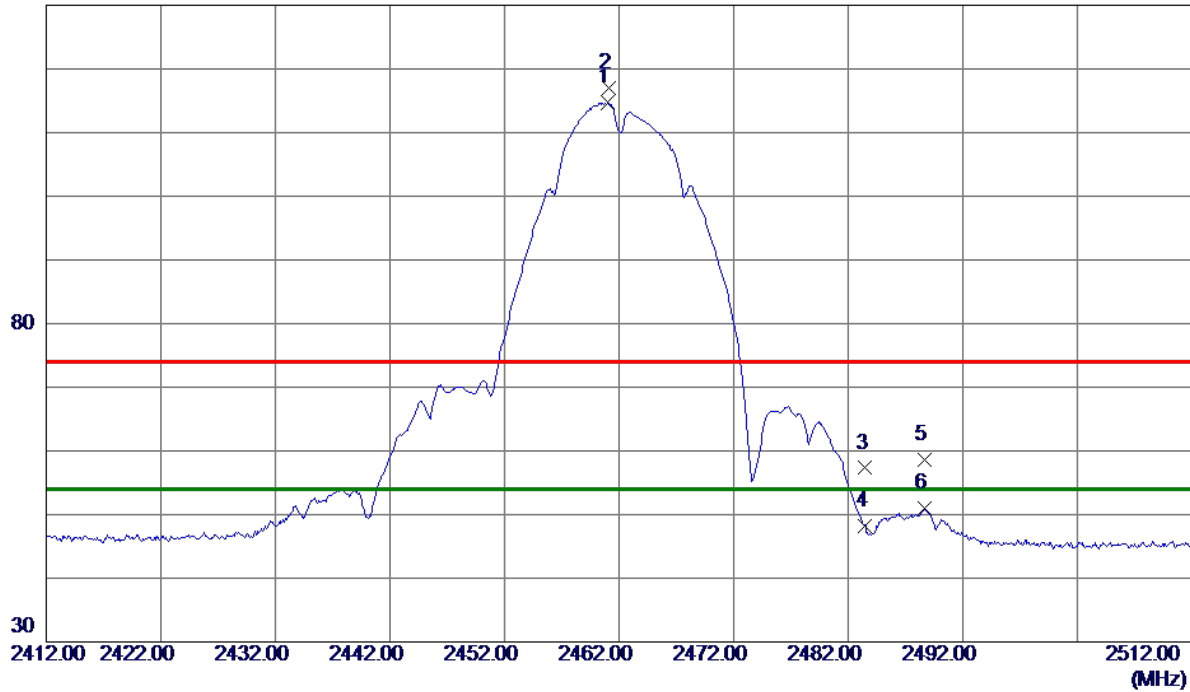

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 2461.0000    | 106.61                     | 8.09                    | 114.70                    | 54.00           | 60.70        | AVG      | No Limit |
| 2   | 2461.1000    | 108.86                     | 8.09                    | 116.95                    | 74.00           | 42.95        | Peak     | No Limit |
| 3   | 2483.5000    | 49.19                      | 8.11                    | 57.30                     | 74.00           | -16.70       | Peak     |          |
| 4   | 2483.5000    | 40.06                      | 8.11                    | 48.17                     | 54.00           | -5.83        | AVG      |          |
| 5   | 2488.7000    | 50.52                      | 8.11                    | 58.63                     | 74.00           | -15.37       | Peak     |          |
| 6   | 2488.7000    | 42.82                      | 8.11                    | 50.93                     | 54.00           | -3.07        | AVG      |          |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX B Mode 2462 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

100 dBuV/m

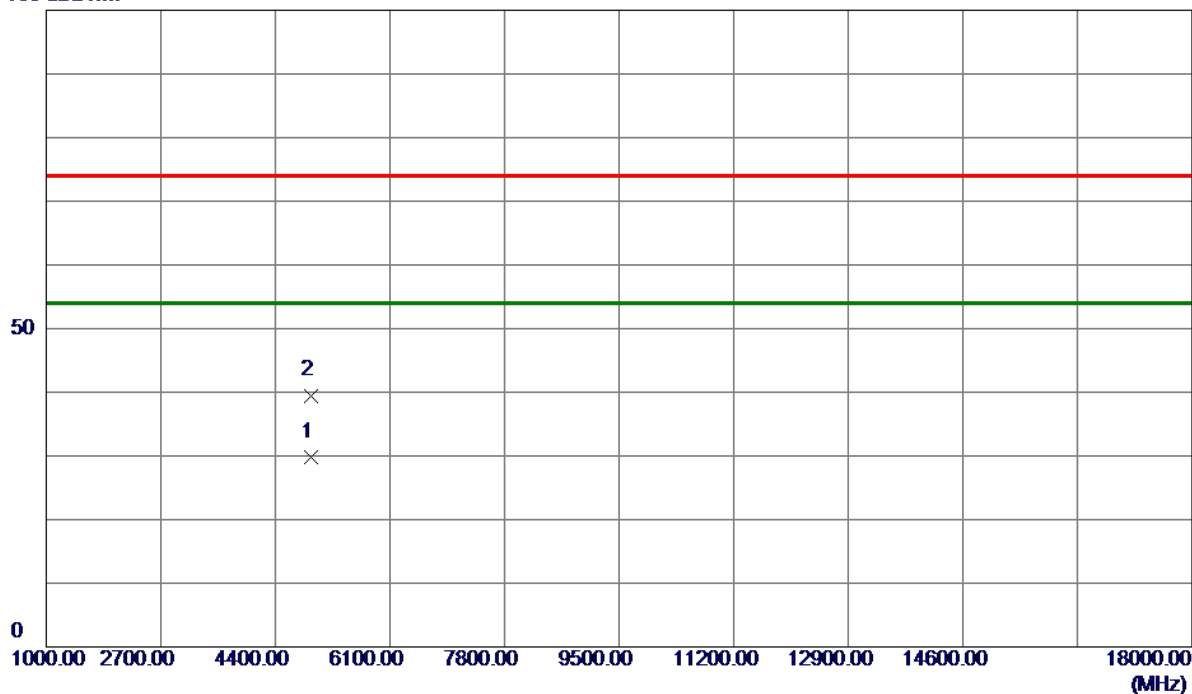

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4924.0000    | 25.97                      | 3.76                    | 29.73                     | 54.00           | -24.27       | AVG      |         |
| 2   | 4931.5800    | 35.72                      | 3.78                    | 39.50                     | 74.00           | -34.50       | Peak     |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX G Mode 2412 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

130 dBuV/m

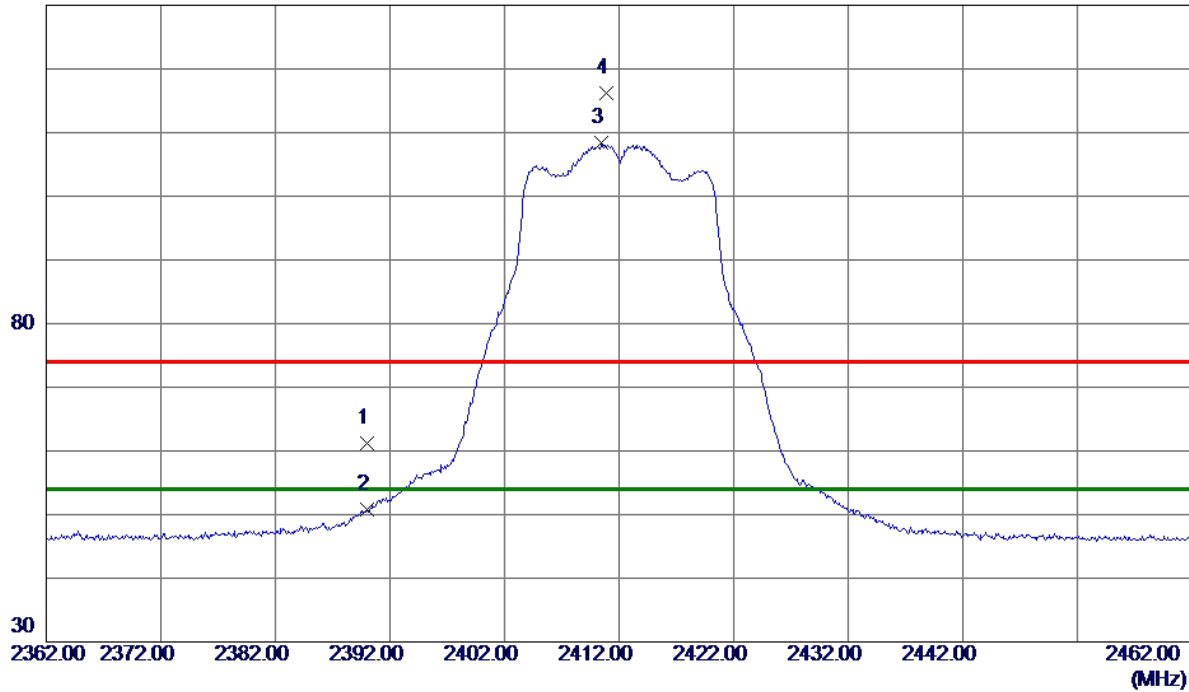


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 53.08                      | 8.05                    | 61.13                     | 74.00           | -12.87       | Peak     |          |
| 2   | 2390.0000    | 42.79                      | 8.05                    | 50.84                     | 54.00           | -3.16        | AVG      |          |
| 3 * | 2410.4000    | 100.35                     | 8.06                    | 108.41                    | 54.00           | 54.41        | AVG      | No Limit |
| 4   | 2410.9000    | 108.10                     | 8.06                    | 116.16                    | 74.00           | 42.16        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX G Mode 2412 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

100 dBuV/m

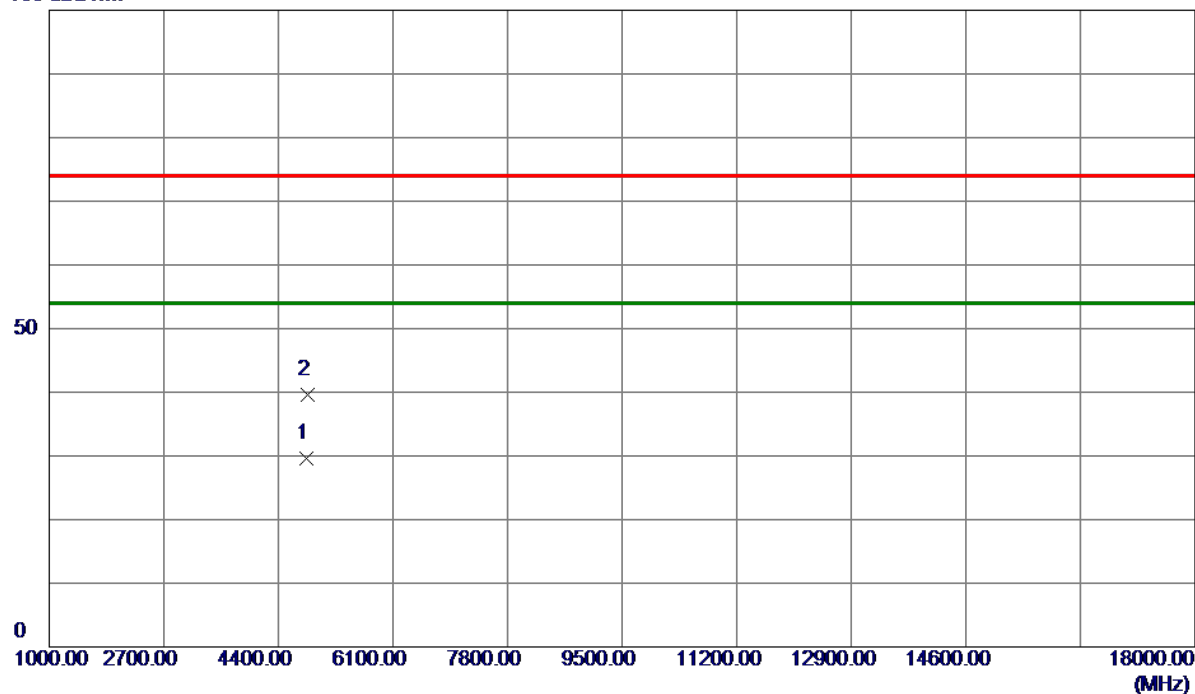


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4814.0000    | 26.29                      | 3.37                    | 29.66                     | 54.00           | -24.34       | AVG      |         |
| 2   | 4831.3800    | 36.19                      | 3.43                    | 39.62                     | 74.00           | -34.38       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX G Mode 2417 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

130 dBuV/m

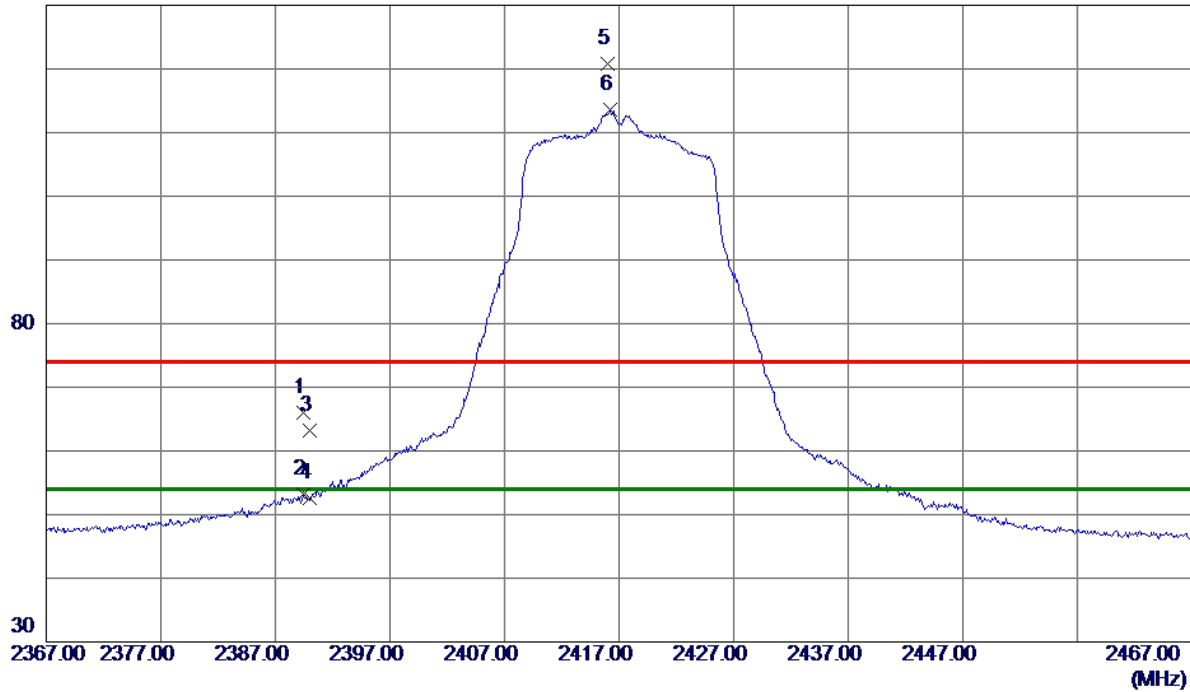


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2389.4000    | 57.95                      | 8.05                    | 66.00                     | 74.00           | -8.00        | Peak     |          |
| 2   | 2389.4000    | 45.12                      | 8.05                    | 53.17                     | 54.00           | -0.83        | AVG      |          |
| 3   | 2390.0000    | 55.22                      | 8.05                    | 63.27                     | 74.00           | -10.73       | Peak     |          |
| 4   | 2390.0000    | 44.51                      | 8.05                    | 52.56                     | 54.00           | -1.44        | AVG      |          |
| 5   | 2416.0000    | 112.81                     | 8.07                    | 120.88                    | 74.00           | 46.88        | Peak     | No Limit |
| 6 * | 2416.2000    | 105.53                     | 8.07                    | 113.60                    | 54.00           | 59.60        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX G Mode 2417 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

100 dBuV/m

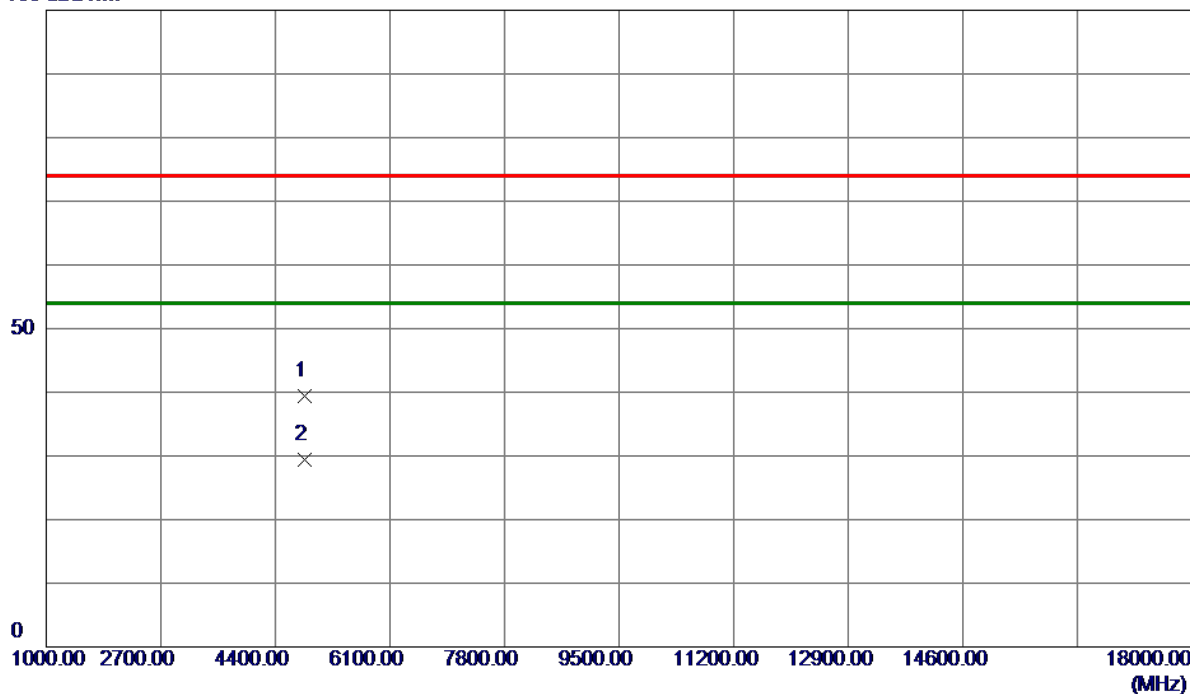

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4834.0600    | 36.00                      | 3.44                    | 39.44                     | 74.00           | -34.56       | Peak     |         |
| 2 * | 4838.6200    | 25.94                      | 3.46                    | 29.40                     | 54.00           | -24.60       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX G Mode 2437 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

130 dBuV/m

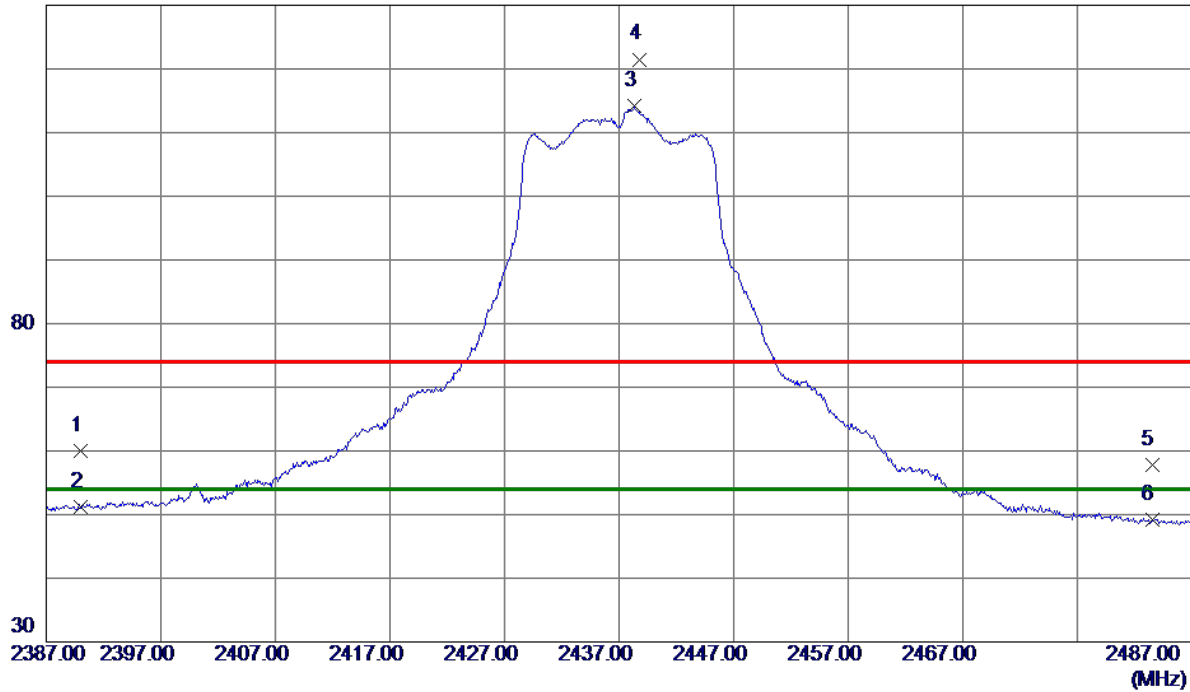

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 51.94                      | 8.05                    | 59.99                     | 74.00           | -14.01       | Peak     |          |
| 2   | 2390.0000    | 43.24                      | 8.05                    | 51.29                     | 54.00           | -2.71        | AVG      |          |
| 3 * | 2438.3000    | 106.11                     | 8.08                    | 114.19                    | 54.00           | 60.19        | AVG      | No Limit |
| 4   | 2438.8000    | 113.42                     | 8.08                    | 121.50                    | 74.00           | 47.50        | Peak     | No Limit |
| 5   | 2483.5000    | 49.78                      | 8.11                    | 57.89                     | 74.00           | -16.11       | Peak     |          |
| 6   | 2483.5000    | 41.02                      | 8.11                    | 49.13                     | 54.00           | -4.87        | AVG      |          |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX G Mode 2437 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

100 dBuV/m

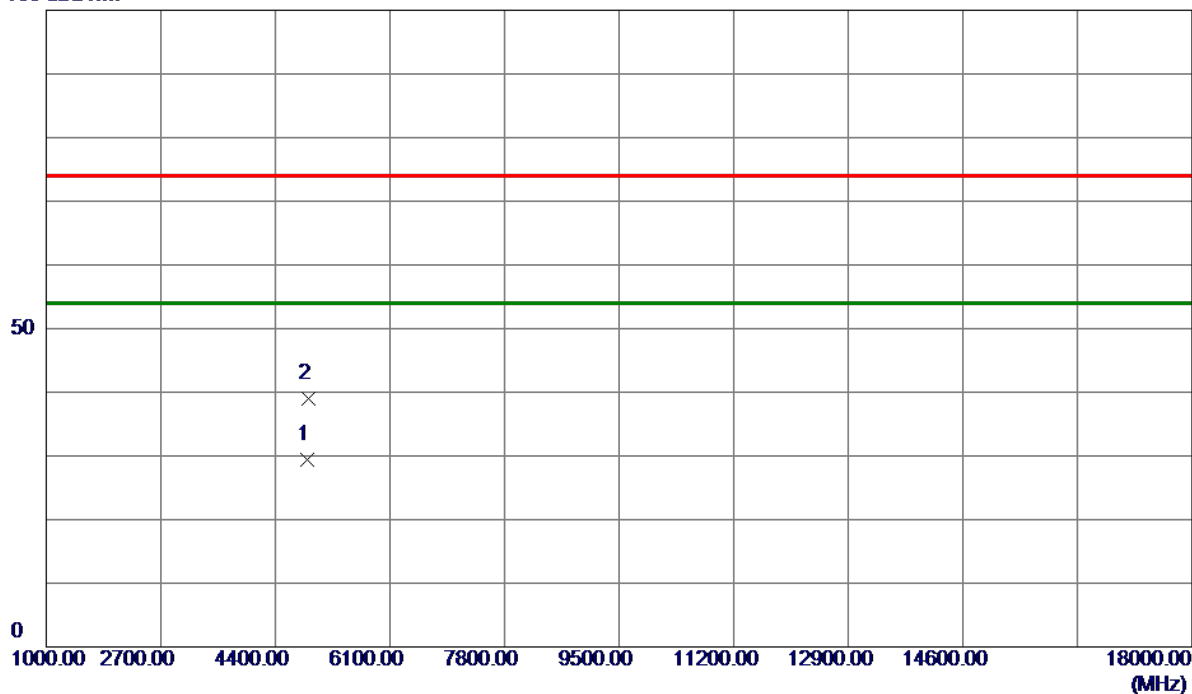


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4876.5200    | 25.73                      | 3.59                    | 29.32                     | 54.00           | -24.68       | AVG      |         |
| 2   | 4883.9800    | 35.43                      | 3.62                    | 39.05                     | 74.00           | -34.95       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX G Mode 2457 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

130 dBuV/m

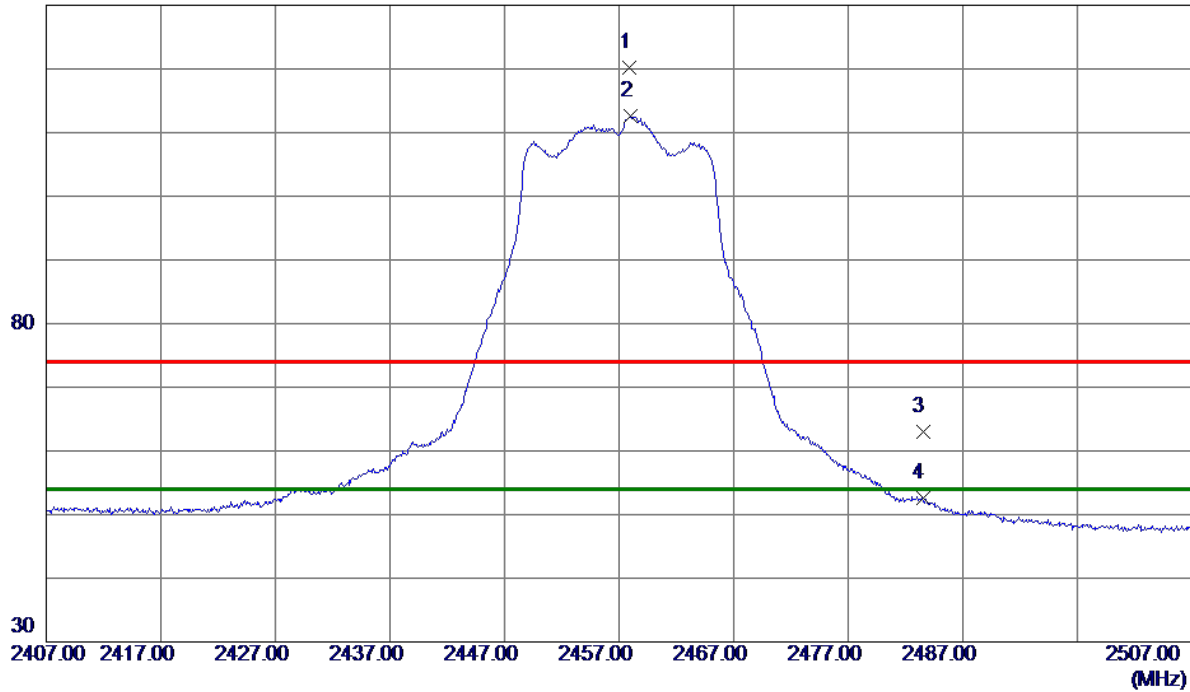

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2457.9000    | 112.15                     | 8.09                    | 120.24                    | 74.00           | 46.24        | Peak     | No Limit |
| 2 * | 2458.0000    | 104.55                     | 8.09                    | 112.64                    | 54.00           | 58.64        | AVG      | No Limit |
| 3   | 2483.5000    | 54.97                      | 8.11                    | 63.08                     | 74.00           | -10.92       | Peak     |          |
| 4   | 2483.5000    | 44.50                      | 8.11                    | 52.61                     | 54.00           | -1.39        | AVG      |          |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX G Mode 2457 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

100 dBuV/m

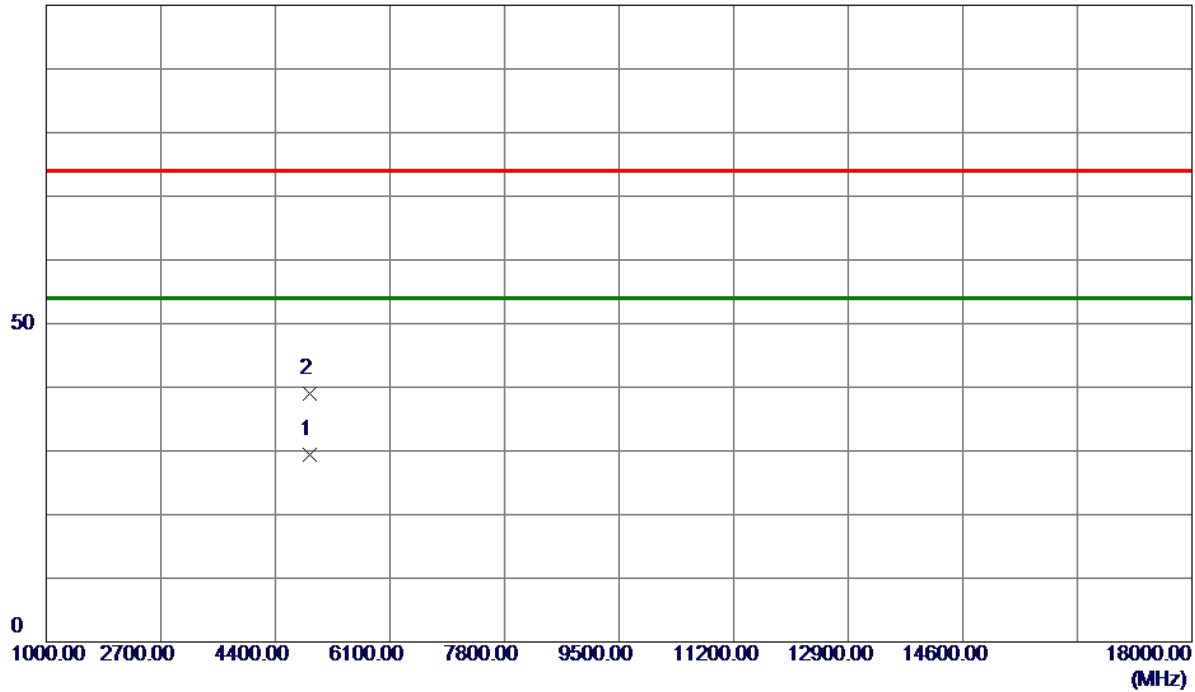


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4904.0600    | 25.77                      | 3.69                    | 29.46                     | 54.00           | -24.54       | AVG      |         |
| 2   | 4910.1200    | 35.37                      | 3.71                    | 39.08                     | 74.00           | -34.92       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX G Mode 2462 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

130 dBuV/m

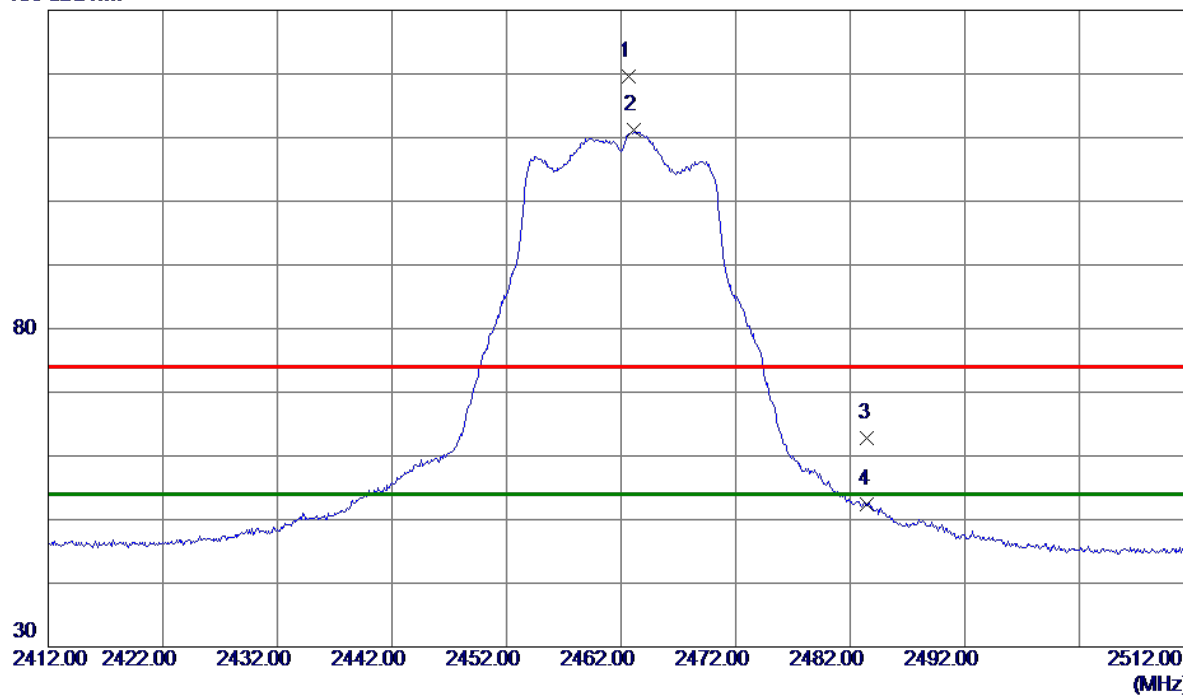


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2462.7000    | 111.46                     | 8.10                    | 119.56                    | 74.00           | 45.56        | Peak     | No Limit |
| 2 * | 2463.1000    | 103.06                     | 8.10                    | 111.16                    | 54.00           | 57.16        | AVG      | No Limit |
| 3   | 2483.5000    | 54.73                      | 8.11                    | 62.84                     | 74.00           | -11.16       | Peak     |          |
| 4   | 2483.5000    | 44.38                      | 8.11                    | 52.49                     | 54.00           | -1.51        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX G Mode 2462 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

100 dBuV/m

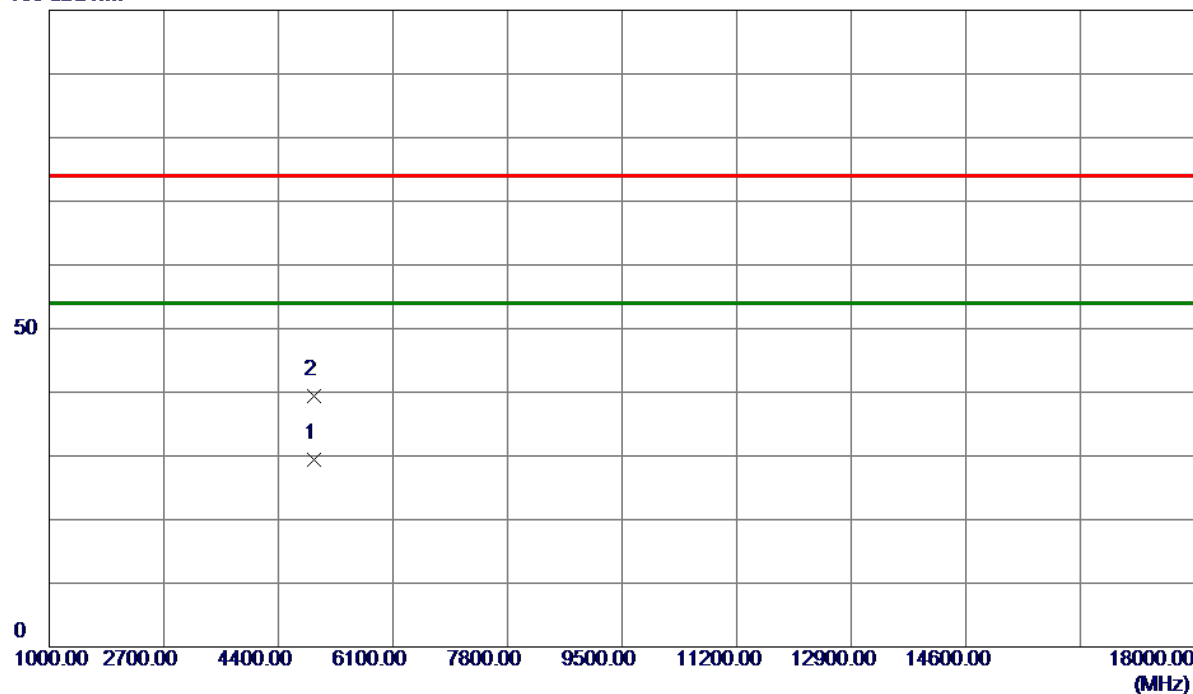

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4932.7200    | 25.71                      | 3.79                    | 29.50                     | 54.00           | -24.50       | AVG      |         |
| 2   | 4933.0000    | 35.71                      | 3.79                    | 39.50                     | 74.00           | -34.50       | Peak     |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT20) Mode 2412 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

130 dBuV/m

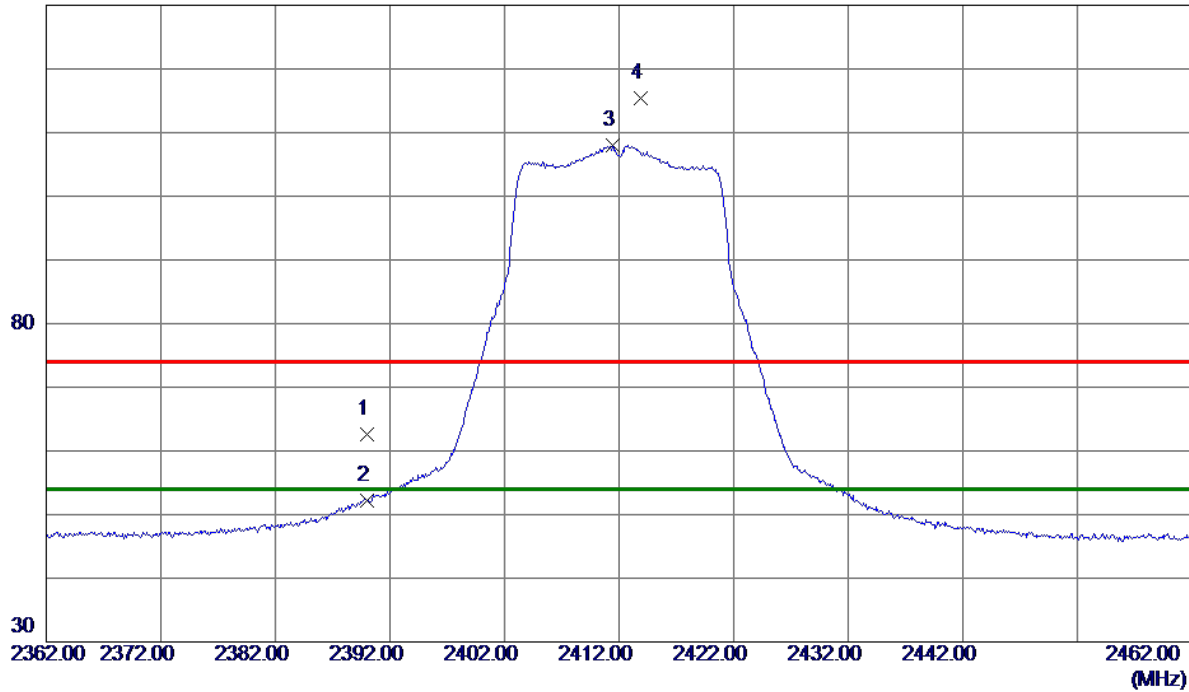

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 54.63                      | 8.05                    | 62.68                     | 74.00           | -11.32       | Peak     |          |
| 2   | 2390.0000    | 44.24                      | 8.05                    | 52.29                     | 54.00           | -1.71        | AVG      |          |
| 3 * | 2411.4000    | 99.94                      | 8.06                    | 108.00                    | 54.00           | 54.00        | AVG      | No Limit |
| 4   | 2413.9000    | 107.27                     | 8.06                    | 115.33                    | 74.00           | 41.33        | Peak     | No Limit |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT20) Mode 2412 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

100 dBuV/m

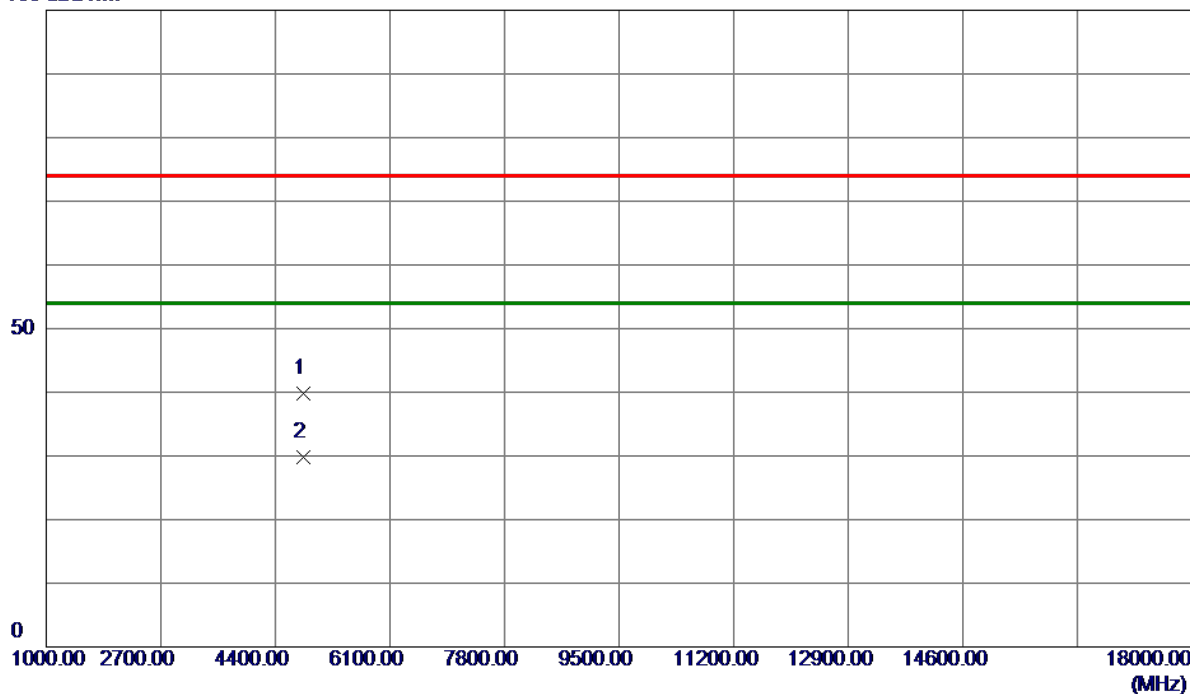


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4814.2000    | 36.37                      | 3.37                    | 39.74                     | 74.00           | -34.26       | Peak     |         |
| 2 * | 4821.8200    | 26.41                      | 3.40                    | 29.81                     | 54.00           | -24.19       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT20) Mode 2417 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

130 dBuV/m

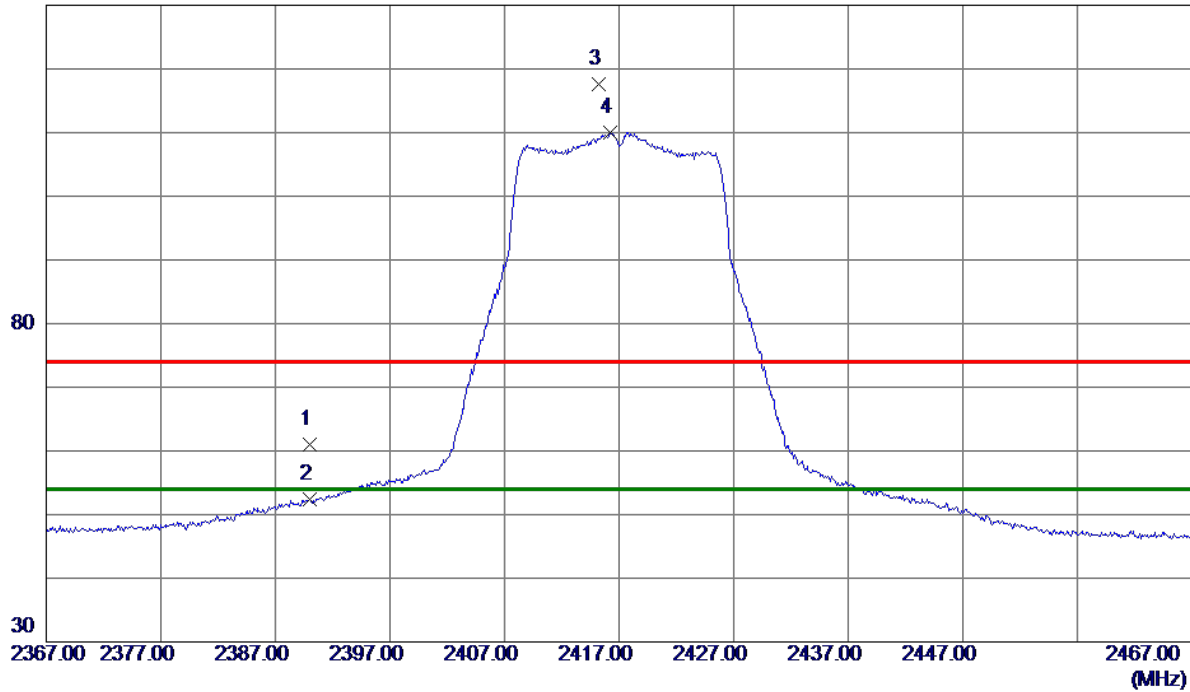

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 52.90                      | 8.05                    | 60.95                     | 74.00           | -13.05       | Peak     |          |
| 2   | 2390.0000    | 44.42                      | 8.05                    | 52.47                     | 54.00           | -1.53        | AVG      |          |
| 3   | 2415.2000    | 109.57                     | 8.07                    | 117.64                    | 74.00           | 43.64        | Peak     | No Limit |
| 4 * | 2416.2000    | 101.95                     | 8.07                    | 110.02                    | 54.00           | 56.02        | AVG      | No Limit |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT20) Mode 2417 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

100 dBuV/m

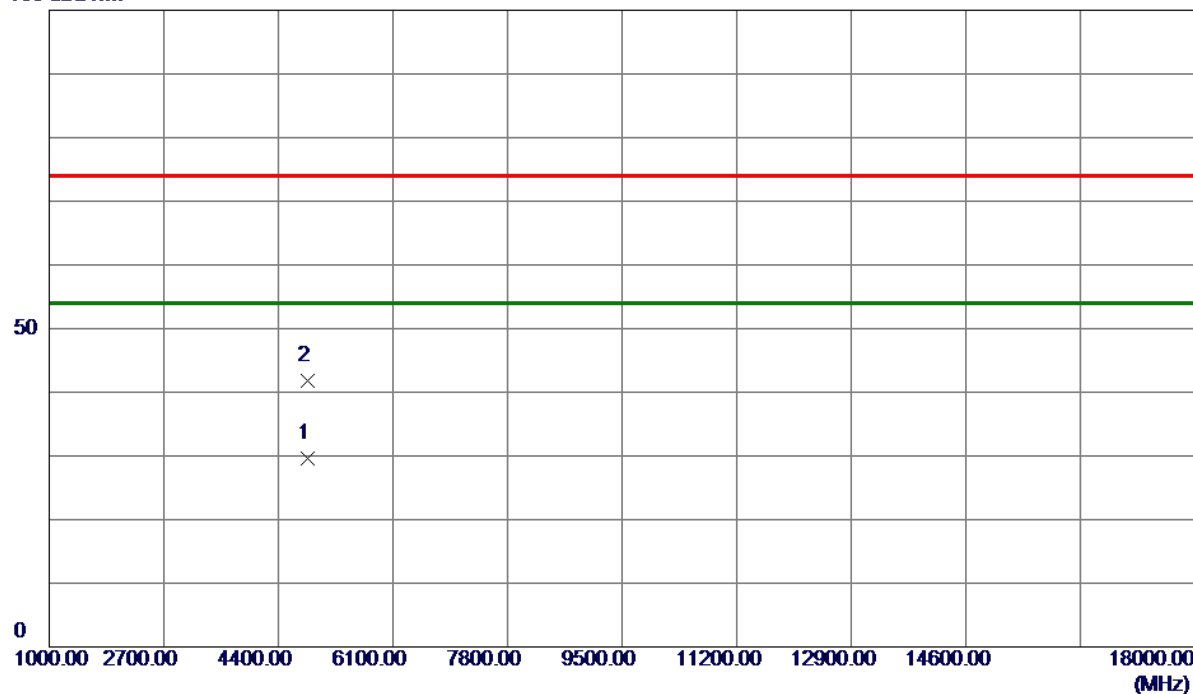


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4833.8400    | 26.24                      | 3.44                    | 29.68                     | 54.00           | -24.32       | AVG      |         |
| 2   | 4834.0400    | 38.41                      | 3.44                    | 41.85                     | 74.00           | -32.15       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT20) Mode 2437 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

130 dBuV/m

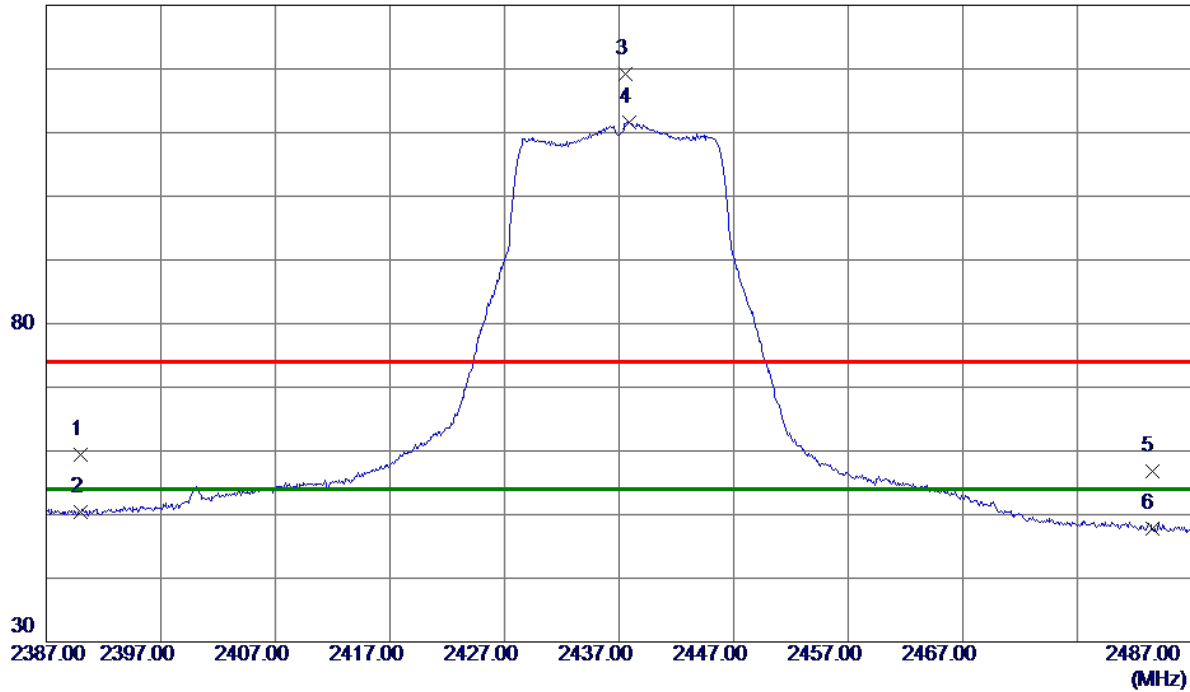

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 51.26                      | 8.05                    | 59.31                     | 74.00           | -14.69       | Peak     |          |
| 2   | 2390.0000    | 42.39                      | 8.05                    | 50.44                     | 54.00           | -3.56        | AVG      |          |
| 3   | 2437.6000    | 111.14                     | 8.08                    | 119.22                    | 74.00           | 45.22        | Peak     | No Limit |
| 4 * | 2437.9000    | 103.48                     | 8.08                    | 111.56                    | 54.00           | 57.56        | AVG      | No Limit |
| 5   | 2483.5000    | 48.75                      | 8.11                    | 56.86                     | 74.00           | -17.14       | Peak     |          |
| 6   | 2483.5000    | 39.76                      | 8.11                    | 47.87                     | 54.00           | -6.13        | AVG      |          |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT20) Mode 2437 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

100 dBuV/m

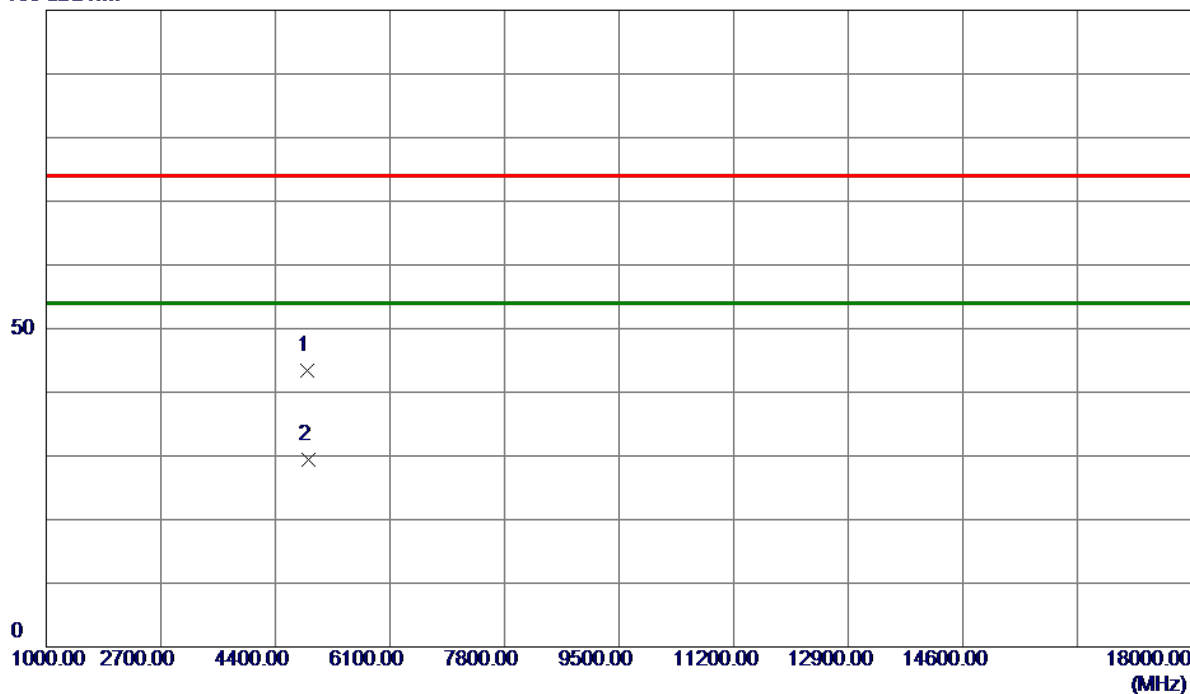

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4879.6200    | 39.71                      | 3.60                    | 43.31                     | 74.00           | -30.69       | Peak     |         |
| 2 * | 4883.0000    | 25.79                      | 3.61                    | 29.40                     | 54.00           | -24.60       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT20) Mode 2457 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

130 dBuV/m

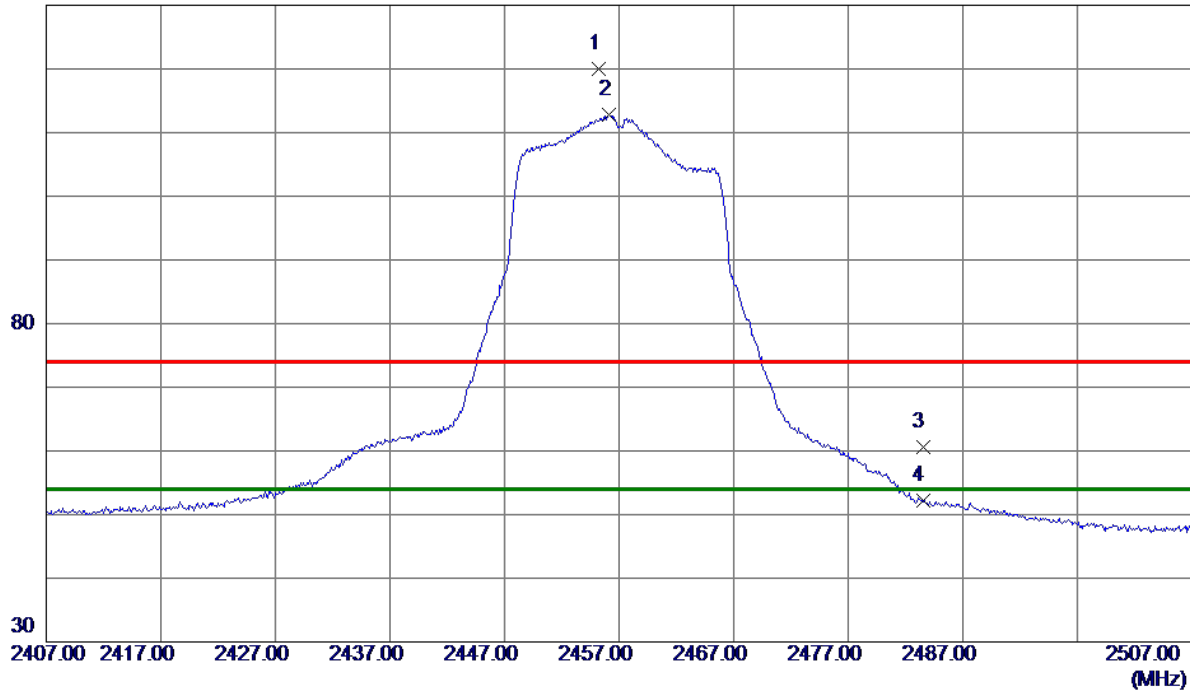

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2455.2000    | 111.85                     | 8.09                    | 119.94                    | 74.00           | 45.94        | Peak     | No Limit |
| 2 * | 2456.1000    | 104.77                     | 8.09                    | 112.86                    | 54.00           | 58.86        | AVG      | No Limit |
| 3   | 2483.5000    | 52.58                      | 8.11                    | 60.69                     | 74.00           | -13.31       | Peak     |          |
| 4   | 2483.5000    | 44.04                      | 8.11                    | 52.15                     | 54.00           | -1.85        | AVG      |          |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT20) Mode 2457 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

100 dBuV/m

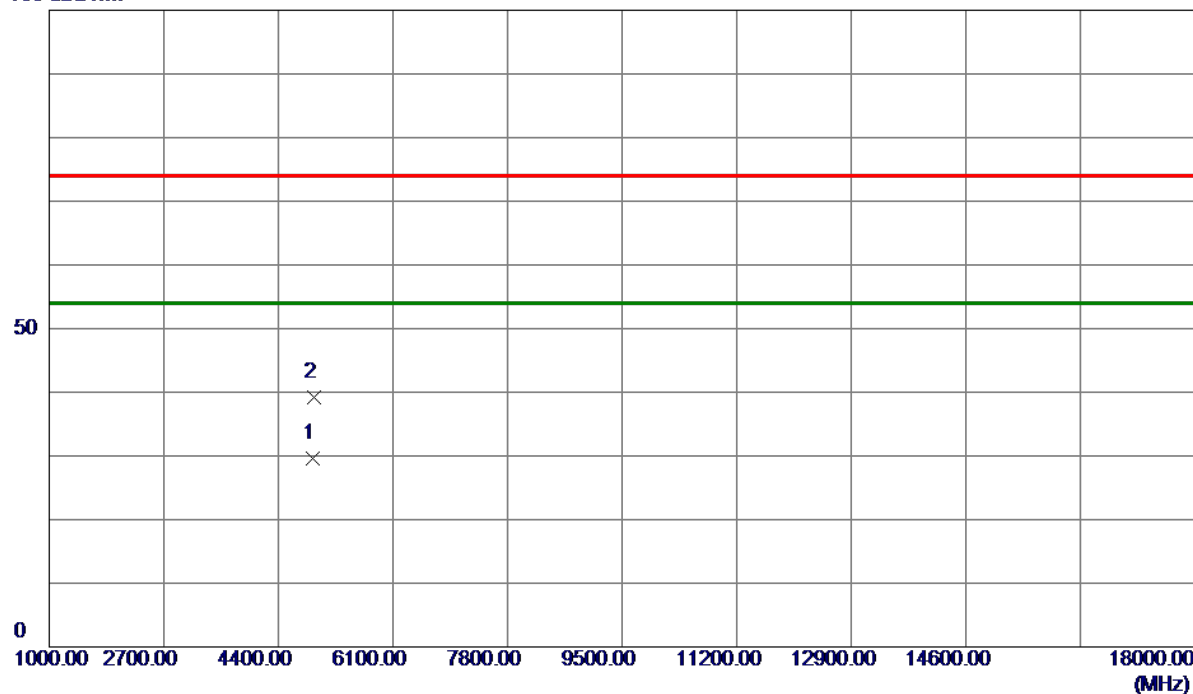

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4905.4200    | 25.82                      | 3.69                    | 29.51                     | 54.00           | -24.49       | AVG      |         |
| 2   | 4921.0400    | 35.43                      | 3.75                    | 39.18                     | 74.00           | -34.82       | Peak     |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT20) Mode 2462 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

130 dBuV/m

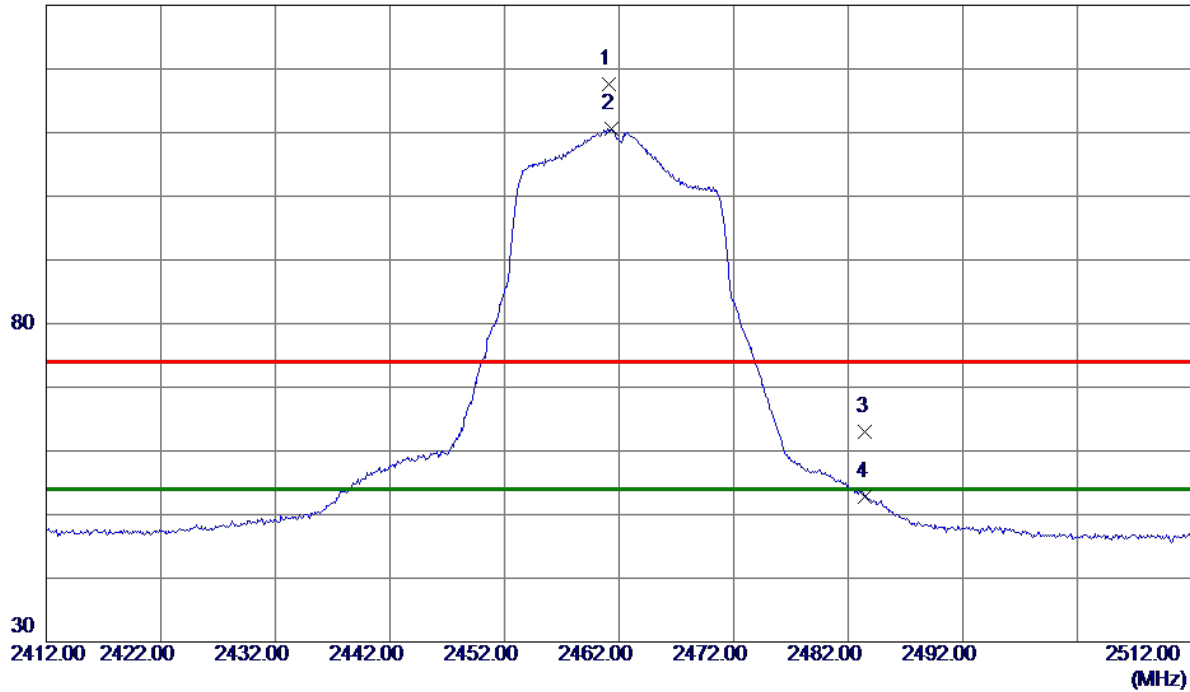

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2461.1000    | 109.53                     | 8.09                    | 117.62                    | 74.00           | 43.62        | Peak     | No Limit |
| 2 * | 2461.3000    | 102.51                     | 8.10                    | 110.61                    | 54.00           | 56.61        | AVG      | No Limit |
| 3   | 2483.5000    | 54.82                      | 8.11                    | 62.93                     | 74.00           | -11.07       | Peak     |          |
| 4   | 2483.5000    | 44.73                      | 8.11                    | 52.84                     | 54.00           | -1.16        | AVG      |          |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT20) Mode 2462 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

100 dBuV/m

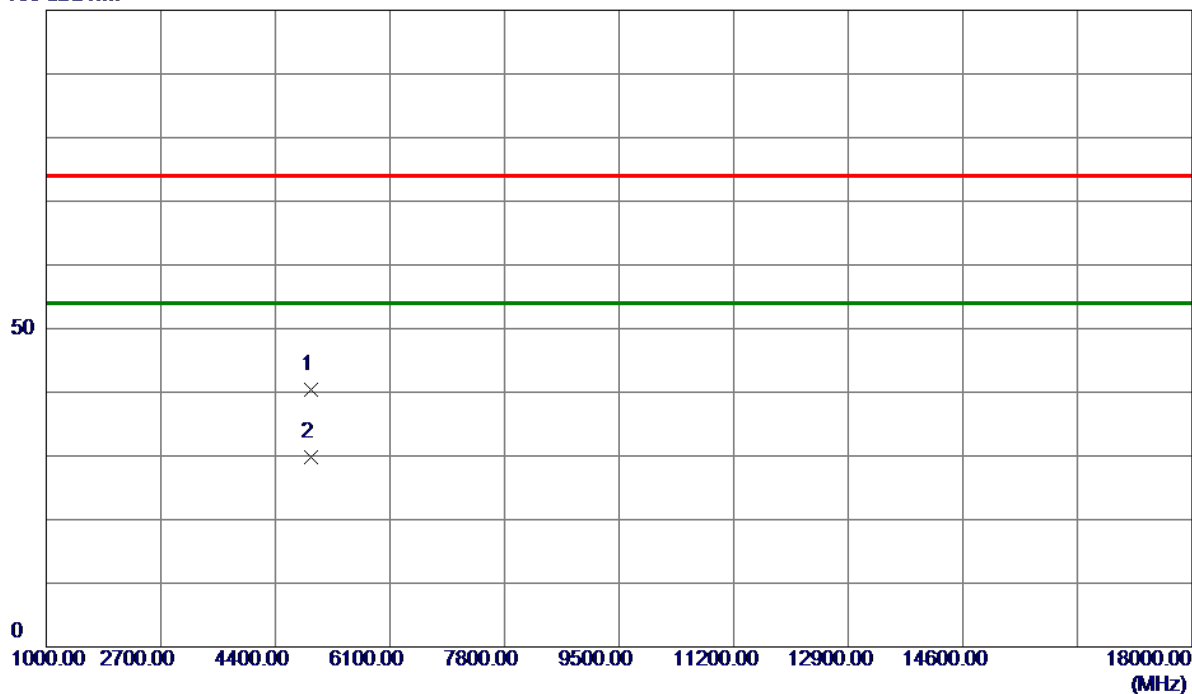

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4924.3800    | 36.73                      | 3.76                    | 40.49                     | 74.00           | -33.51       | Peak     |         |
| 2 * | 4933.1600    | 26.00                      | 3.79                    | 29.79                     | 54.00           | -24.21       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT40) Mode 2422 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

130 dBuV/m

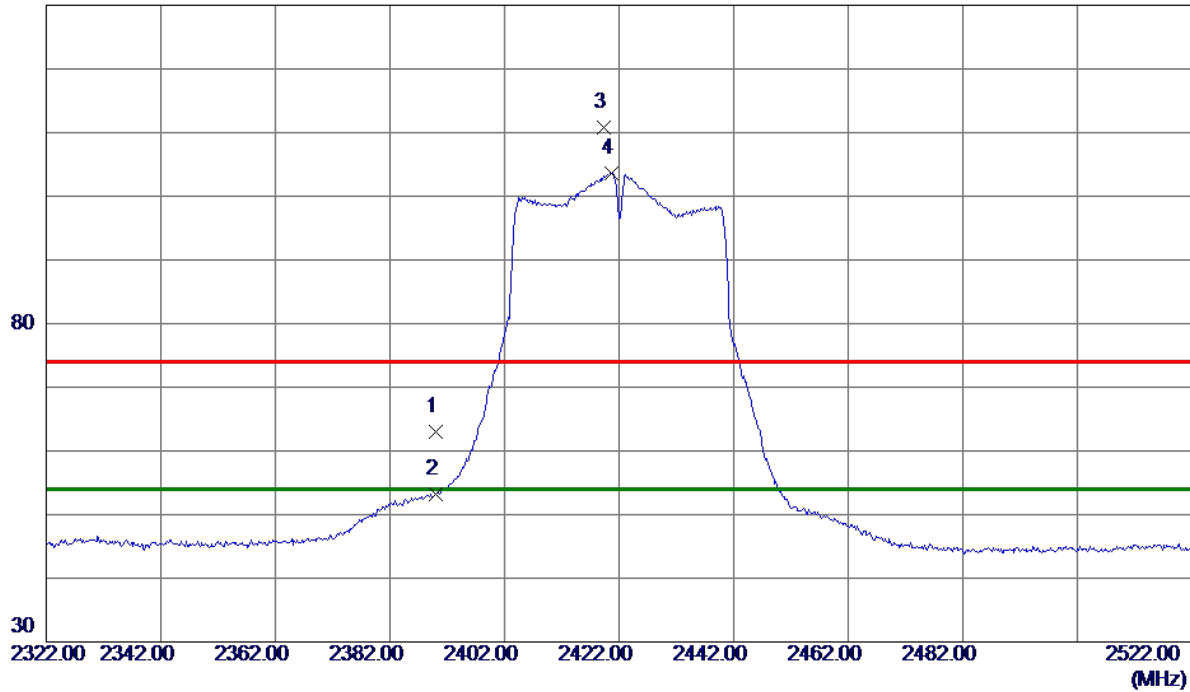

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 54.97                      | 8.05                    | 63.02                     | 74.00           | -10.98       | Peak     |          |
| 2   | 2390.0000    | 45.24                      | 8.05                    | 53.29                     | 54.00           | -0.71        | AVG      |          |
| 3   | 2419.4000    | 102.78                     | 8.07                    | 110.85                    | 74.00           | 36.85        | Peak     | No Limit |
| 4 * | 2420.6000    | 95.62                      | 8.07                    | 103.69                    | 54.00           | 49.69        | AVG      | No Limit |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT40) Mode 2422 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

100 dBuV/m

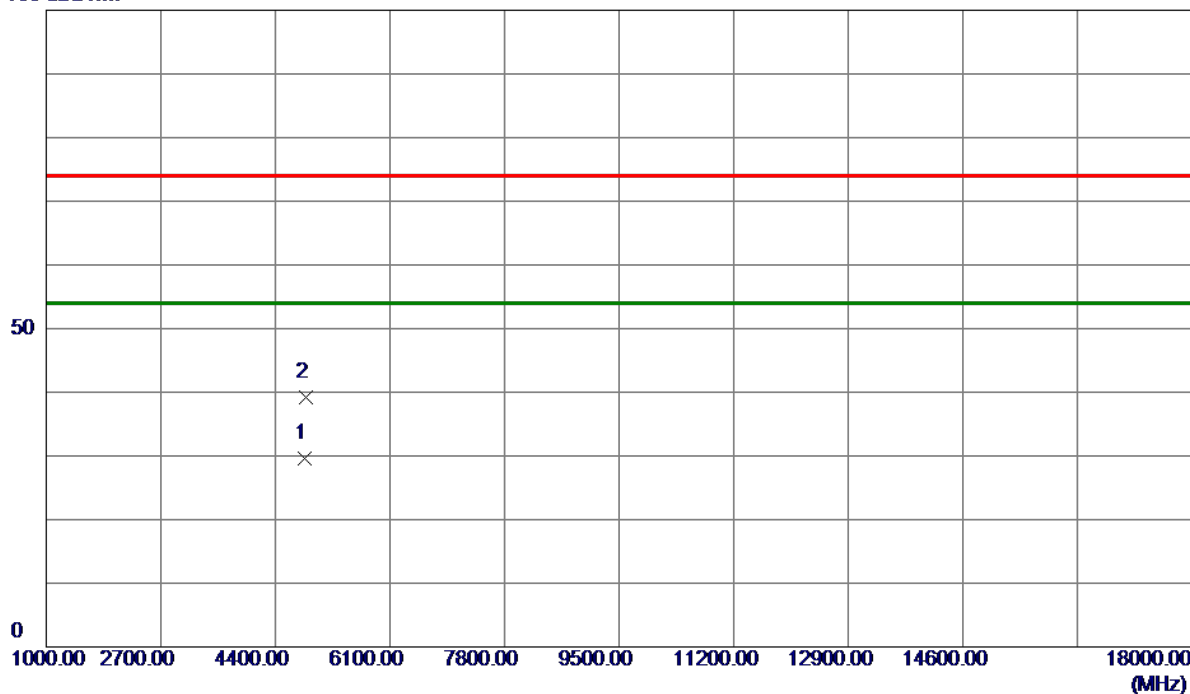


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4838.4400    | 26.10                      | 3.46                    | 29.56                     | 54.00           | -24.44       | AVG      |         |
| 2   | 4845.7799    | 35.75                      | 3.48                    | 39.23                     | 74.00           | -34.77       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT40) Mode 2427 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

130 dBuV/m

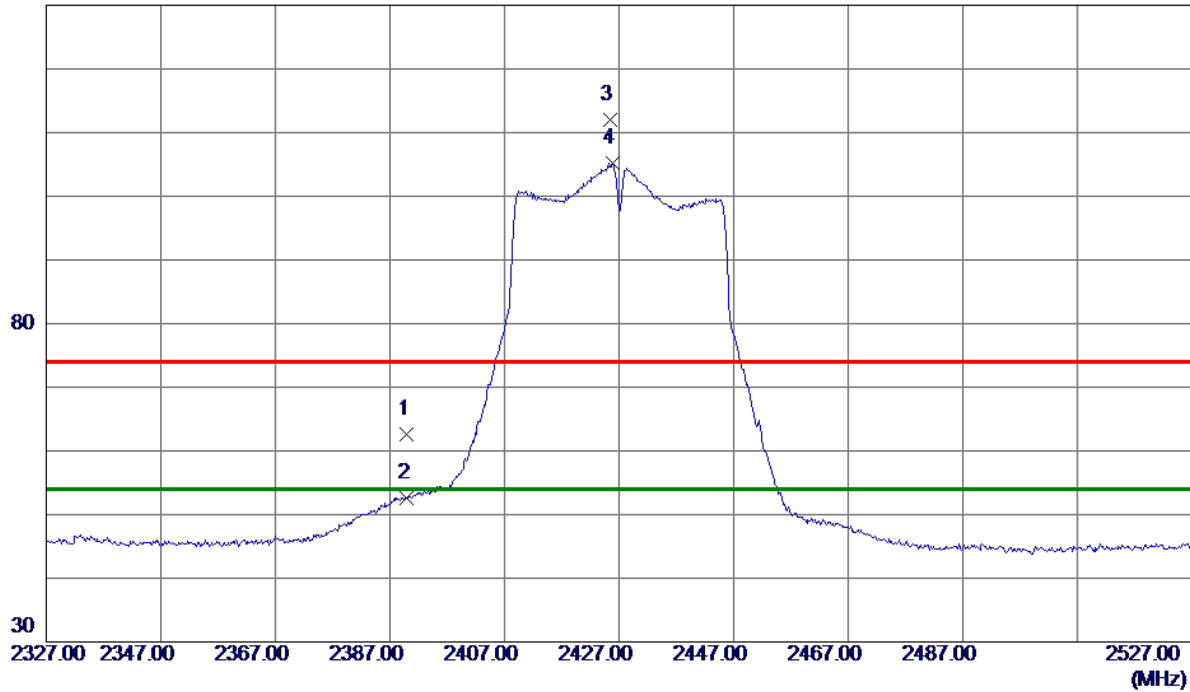


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 54.55                      | 8.05                    | 62.60                     | 74.00           | -11.40       | Peak     |          |
| 2   | 2390.0000    | 44.57                      | 8.05                    | 52.62                     | 54.00           | -1.38        | AVG      |          |
| 3   | 2425.4000    | 104.03                     | 8.07                    | 112.10                    | 74.00           | 38.10        | Peak     | No Limit |
| 4 * | 2425.8000    | 97.11                      | 8.07                    | 105.18                    | 54.00           | 51.18        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT40) Mode 2427 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

100 dBuV/m

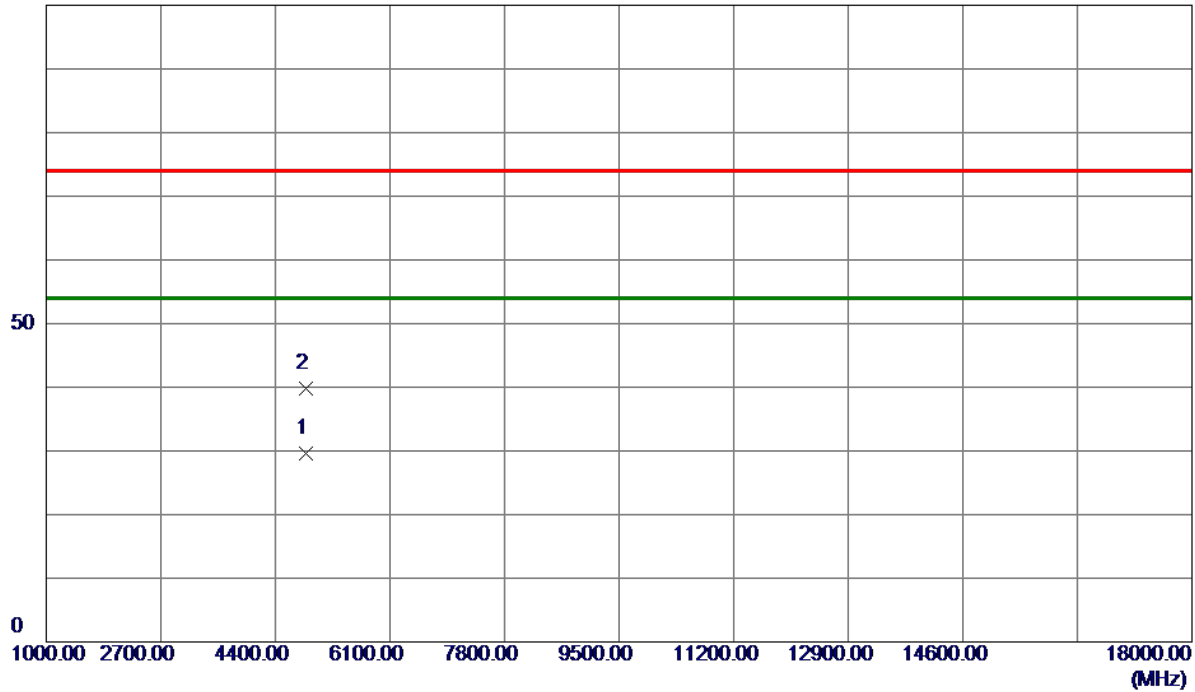


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4854.3200    | 26.05                      | 3.51                    | 29.56                     | 54.00           | -24.44       | AVG      |         |
| 2   | 4861.4000    | 36.32                      | 3.54                    | 39.86                     | 74.00           | -34.14       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT40) Mode 2437 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

130 dBuV/m

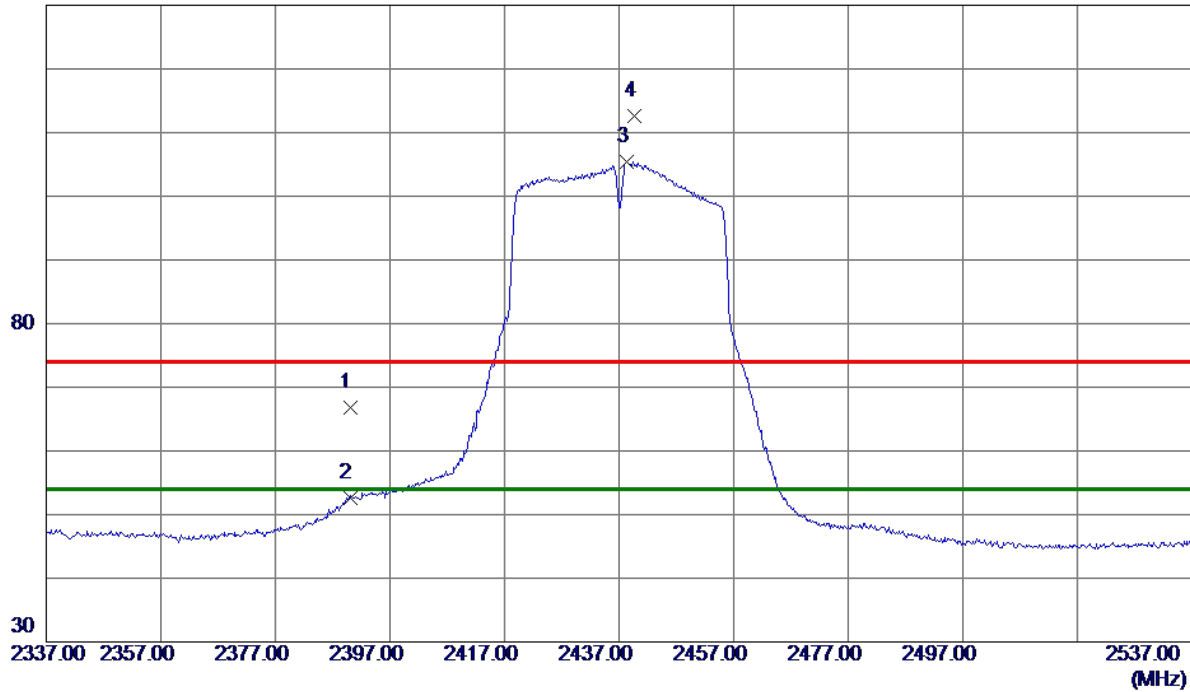

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 58.82                      | 8.05                    | 66.87                     | 74.00           | -7.13        | Peak     |          |
| 2   | 2390.0000    | 44.56                      | 8.05                    | 52.61                     | 54.00           | -1.39        | AVG      |          |
| 3 * | 2438.4000    | 97.41                      | 8.08                    | 105.49                    | 54.00           | 51.49        | AVG      | No Limit |
| 4   | 2439.6000    | 104.50                     | 8.08                    | 112.58                    | 74.00           | 38.58        | Peak     | No Limit |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT40) Mode 2437 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

100 dBuV/m

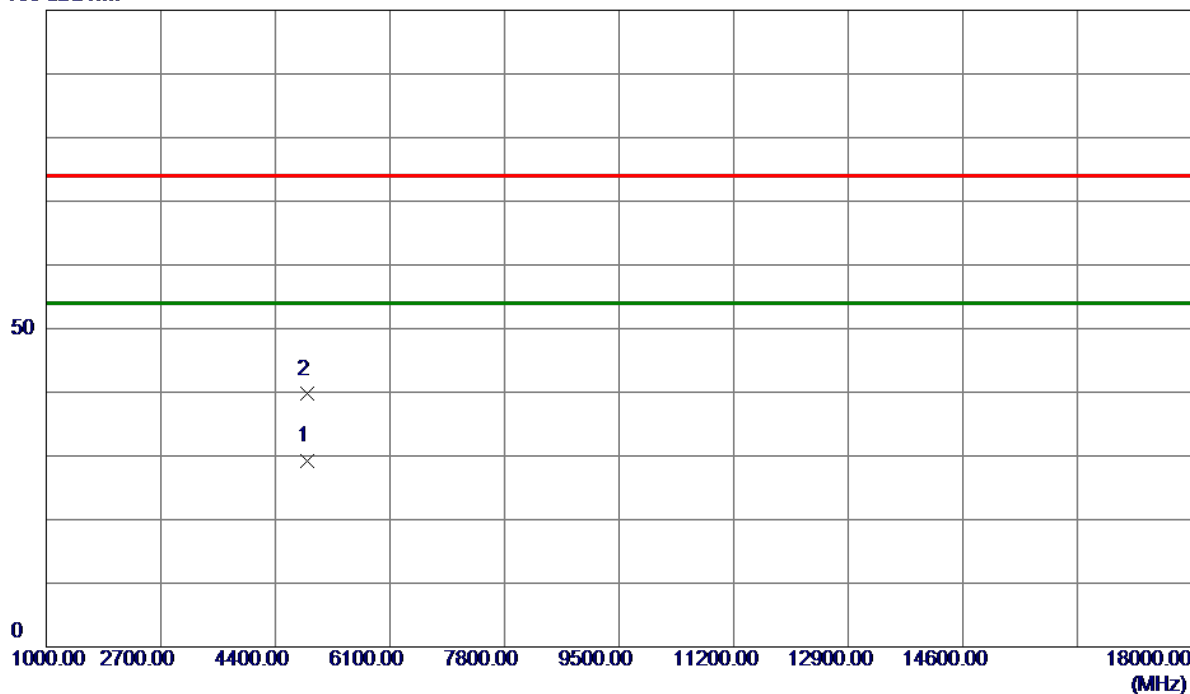


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4864.2000    | 25.72                      | 3.55                    | 29.27                     | 54.00           | -24.73       | AVG      |         |
| 2   | 4866.0800    | 36.15                      | 3.55                    | 39.70                     | 74.00           | -34.30       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT40) Mode 2447 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

130 dBuV/m

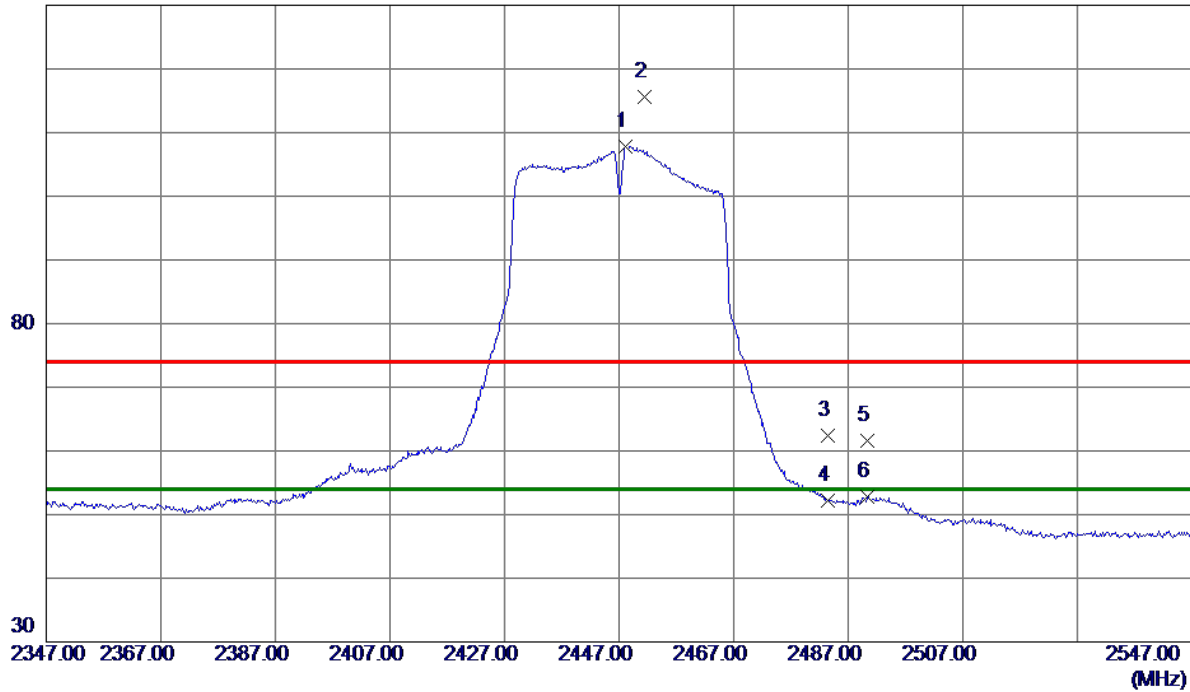

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 2448.2000    | 99.76                      | 8.09                    | 107.85                    | 54.00           | 53.85        | AVG      | No Limit |
| 2   | 2451.4000    | 107.57                     | 8.09                    | 115.66                    | 74.00           | 41.66        | Peak     | No Limit |
| 3   | 2483.5000    | 54.33                      | 8.11                    | 62.44                     | 74.00           | -11.56       | Peak     |          |
| 4   | 2483.5000    | 44.08                      | 8.11                    | 52.19                     | 54.00           | -1.81        | AVG      |          |
| 5   | 2490.4000    | 53.55                      | 8.11                    | 61.66                     | 74.00           | -12.34       | Peak     |          |
| 6   | 2490.4000    | 44.62                      | 8.11                    | 52.73                     | 54.00           | -1.27        | AVG      |          |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT40) Mode 2447 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

100 dBuV/m

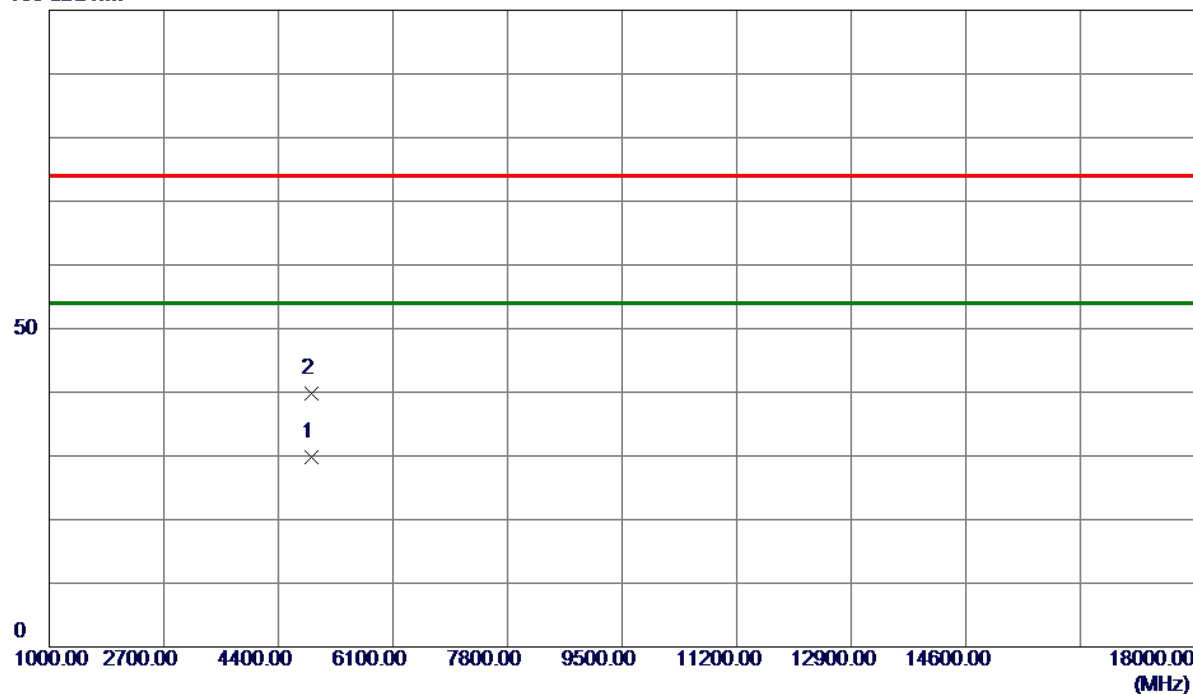


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4887.3600    | 26.11                      | 3.63                    | 29.74                     | 54.00           | -24.26       | AVG      |         |
| 2   | 4898.8600    | 36.11                      | 3.67                    | 39.78                     | 74.00           | -34.22       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT40) Mode 2452 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

130 dBuV/m

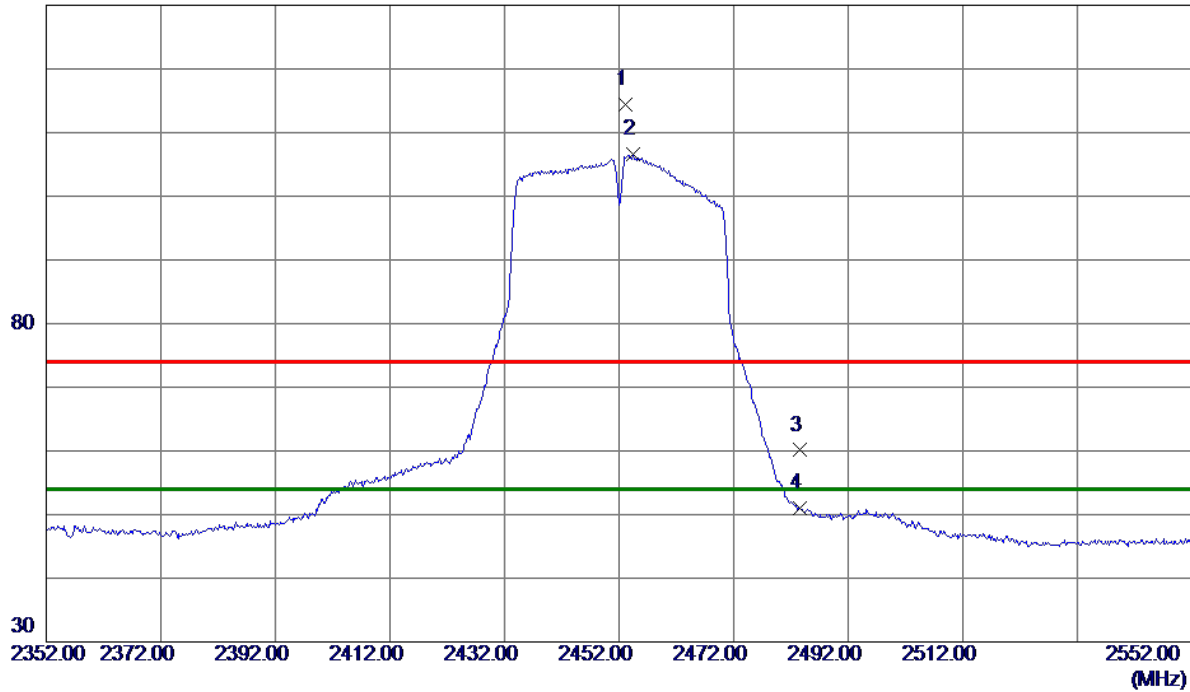


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2453.2000    | 106.30                     | 8.09                    | 114.39                    | 74.00           | 40.39        | Peak     | No Limit |
| 2 * | 2454.4000    | 98.45                      | 8.09                    | 106.54                    | 54.00           | 52.54        | AVG      | No Limit |
| 3   | 2483.5000    | 51.99                      | 8.11                    | 60.10                     | 74.00           | -13.90       | Peak     |          |
| 4   | 2483.5000    | 42.94                      | 8.11                    | 51.05                     | 54.00           | -2.95        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT40) Mode 2452 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

100 dBuV/m

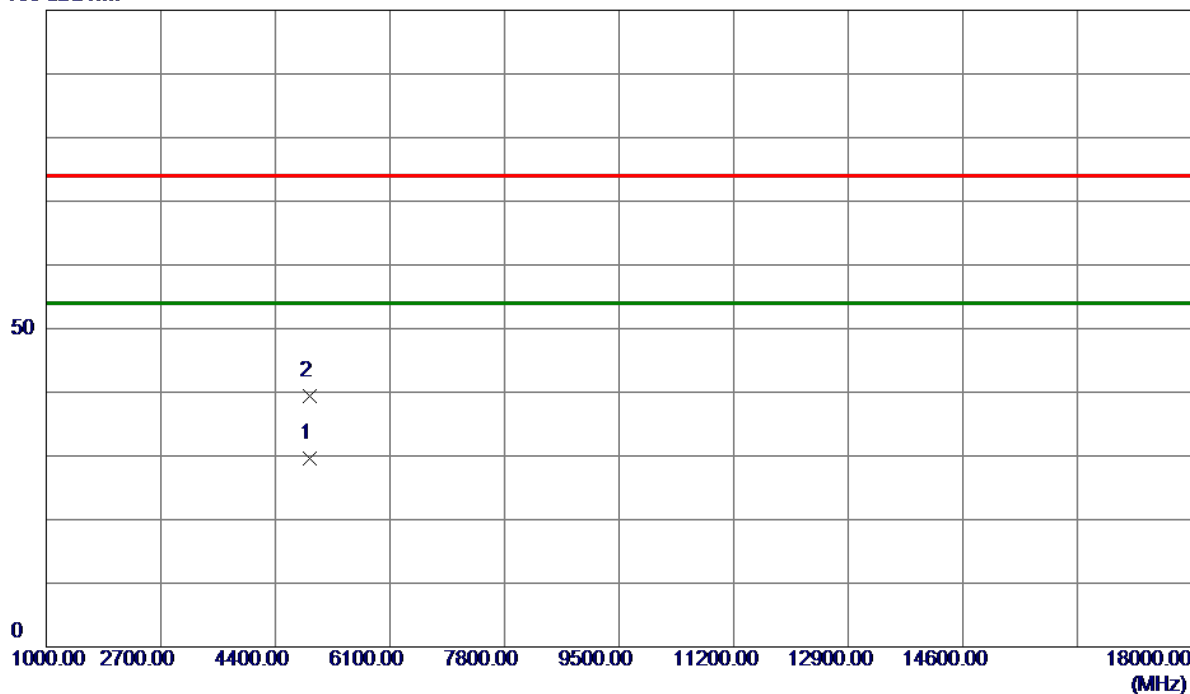

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4904.8800    | 25.87                      | 3.69                    | 29.56                     | 54.00           | -24.44       | AVG      |         |
| 2   | 4908.7200    | 35.76                      | 3.70                    | 39.46                     | 74.00           | -34.54       | Peak     |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT20) Mode 2412 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

130 dBuV/m

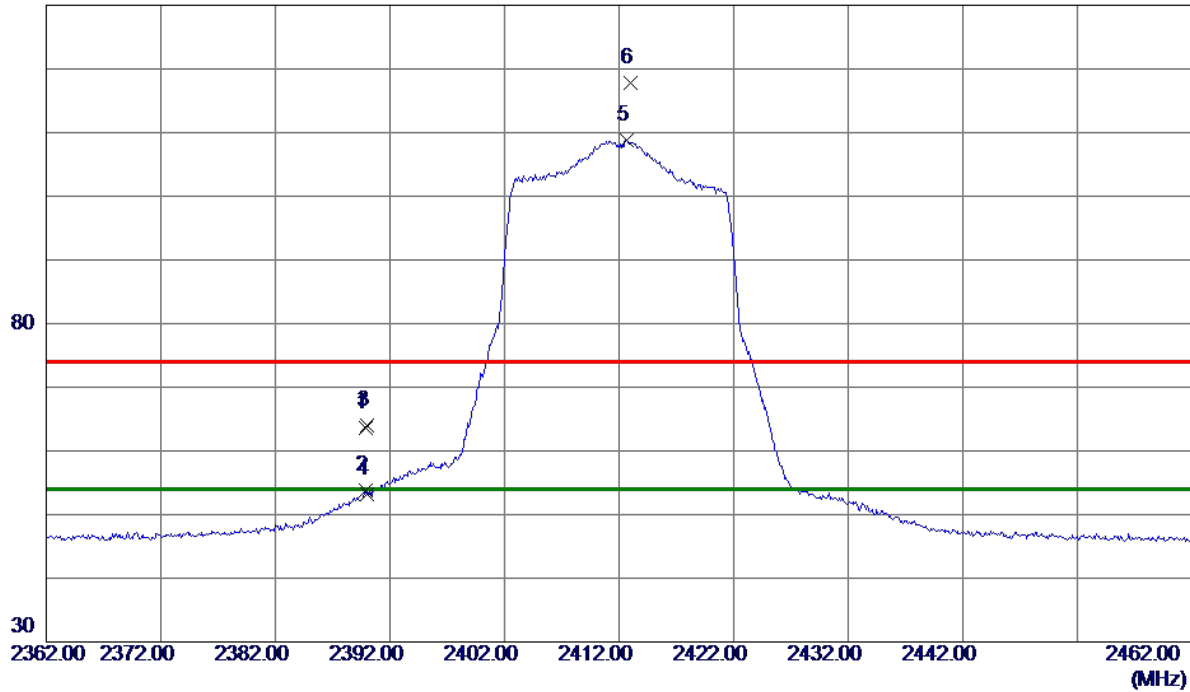


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2389.9000    | 55.52                      | 8.05                    | 63.57                     | 74.00           | -10.43       | Peak     |          |
| 2   | 2389.9000    | 45.73                      | 8.05                    | 53.78                     | 54.00           | -0.22        | AVG      |          |
| 3   | 2390.0000    | 55.98                      | 8.05                    | 64.03                     | 74.00           | -9.97        | Peak     |          |
| 4   | 2390.0000    | 45.13                      | 8.05                    | 53.18                     | 54.00           | -0.82        | AVG      |          |
| 5 * | 2412.7000    | 100.65                     | 8.06                    | 108.71                    | 54.00           | 54.71        | AVG      | No Limit |
| 6   | 2413.0000    | 109.66                     | 8.06                    | 117.72                    | 74.00           | 43.72        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT20) Mode 2412 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

100 dBuV/m

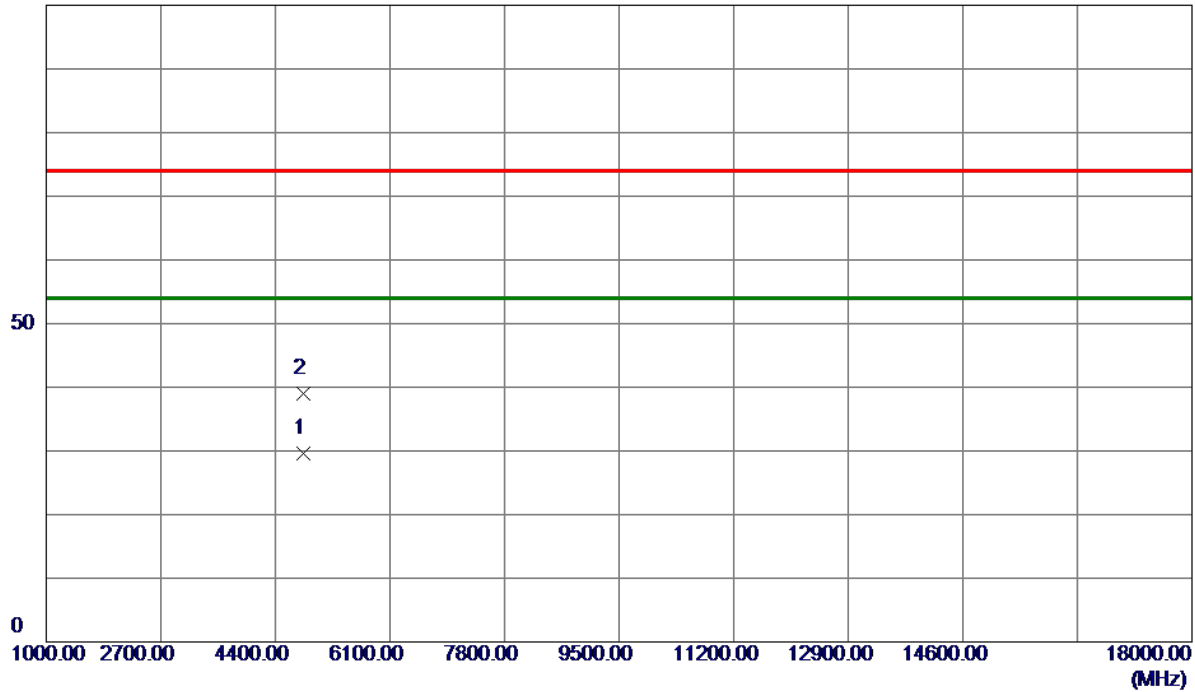


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4814.4800    | 26.21                      | 3.37                    | 29.58                     | 54.00           | -24.42       | AVG      |         |
| 2   | 4815.5600    | 35.70                      | 3.38                    | 39.08                     | 74.00           | -34.92       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT20) Mode 2417 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

130 dBuV/m

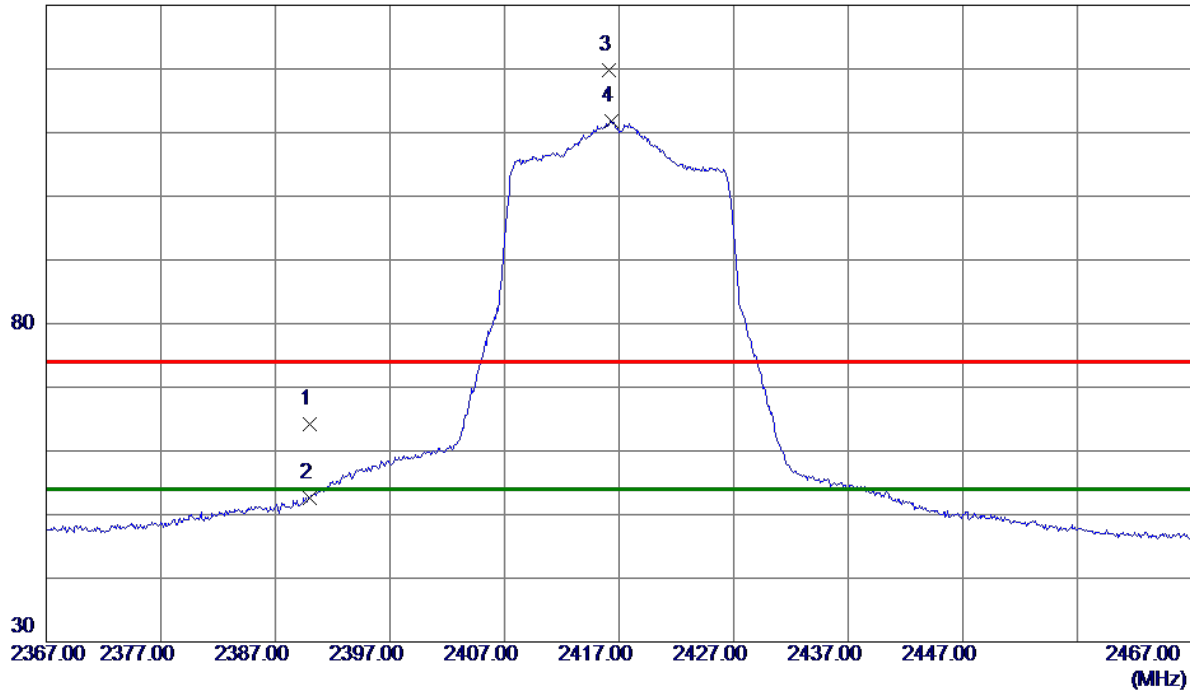


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 56.09                      | 8.05                    | 64.14                     | 74.00           | -9.86        | Peak     |          |
| 2   | 2390.0000    | 44.51                      | 8.05                    | 52.56                     | 54.00           | -1.44        | AVG      |          |
| 3   | 2416.1000    | 111.68                     | 8.07                    | 119.75                    | 74.00           | 45.75        | Peak     | No Limit |
| 4 * | 2416.3000    | 103.72                     | 8.07                    | 111.79                    | 54.00           | 57.79        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT20) Mode 2417 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

100 dBuV/m

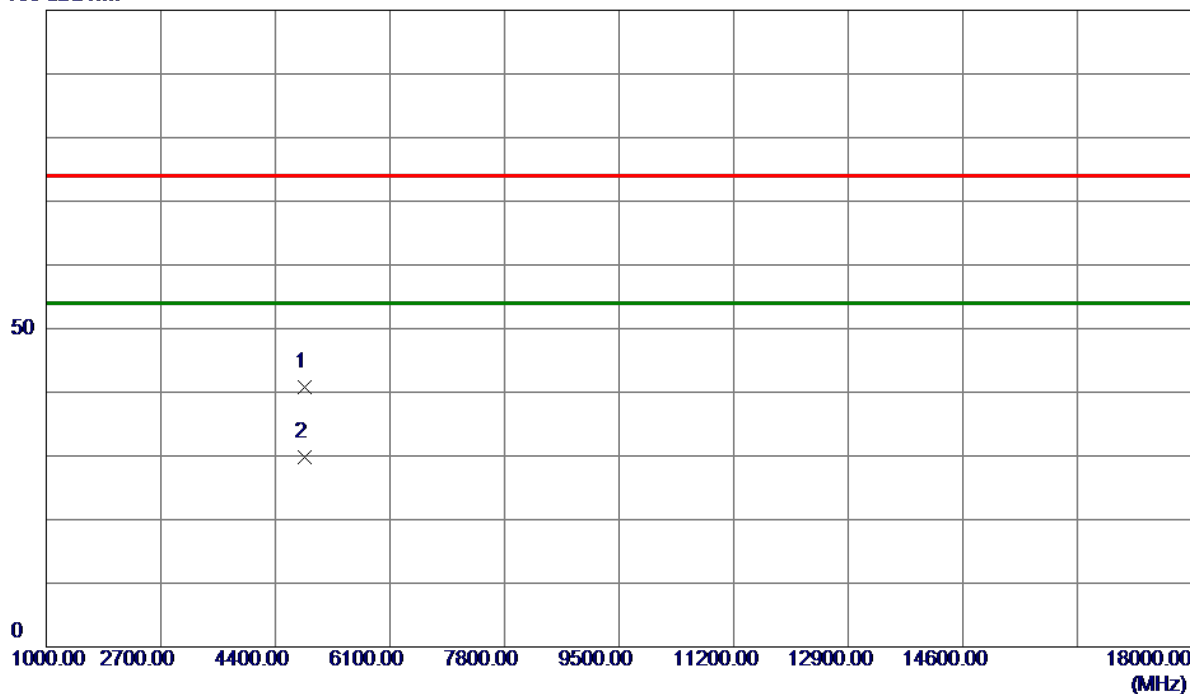

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4838.0400    | 37.34                      | 3.46                    | 40.80                     | 74.00           | -33.20       | Peak     |         |
| 2 * | 4840.7799    | 26.31                      | 3.47                    | 29.78                     | 54.00           | -24.22       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT20) Mode 2437 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

130 dBuV/m

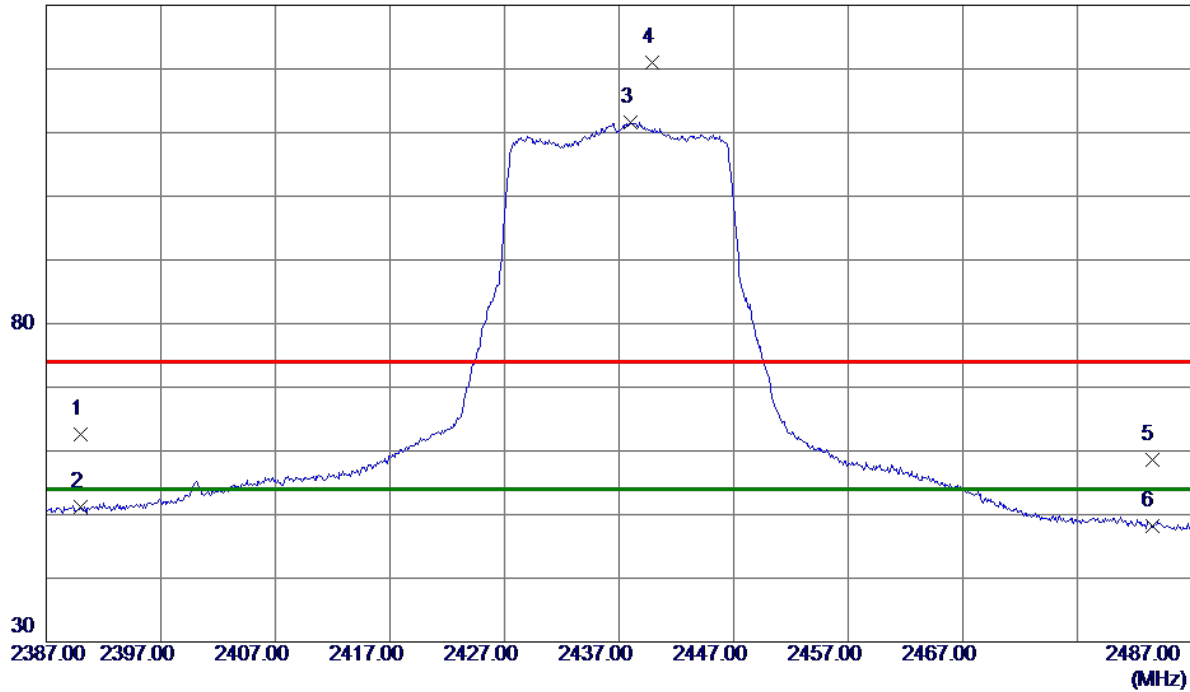

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 54.53                      | 8.05                    | 62.58                     | 74.00           | -11.42       | Peak     |          |
| 2   | 2390.0000    | 43.18                      | 8.05                    | 51.23                     | 54.00           | -2.77        | AVG      |          |
| 3 * | 2438.0000    | 103.54                     | 8.08                    | 111.62                    | 54.00           | 57.62        | AVG      | No Limit |
| 4   | 2439.9000    | 113.01                     | 8.08                    | 121.09                    | 74.00           | 47.09        | Peak     | No Limit |
| 5   | 2483.5000    | 50.58                      | 8.11                    | 58.69                     | 74.00           | -15.31       | Peak     |          |
| 6   | 2483.5000    | 40.12                      | 8.11                    | 48.23                     | 54.00           | -5.77        | AVG      |          |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT20) Mode 2437 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

100 dBuV/m

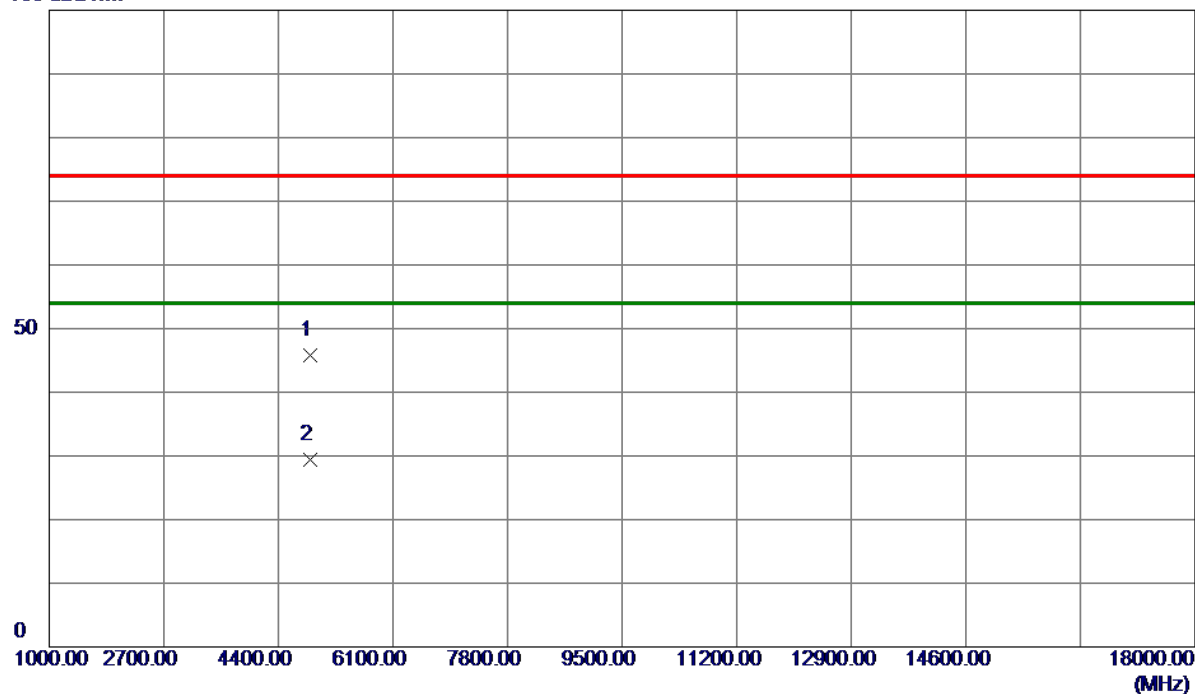


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4871.7599    | 42.26                      | 3.57                    | 45.83                     | 74.00           | -28.17       | Peak     |         |
| 2 * | 4880.0200    | 25.73                      | 3.60                    | 29.33                     | 54.00           | -24.67       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT20) Mode 2457 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

130 dBuV/m

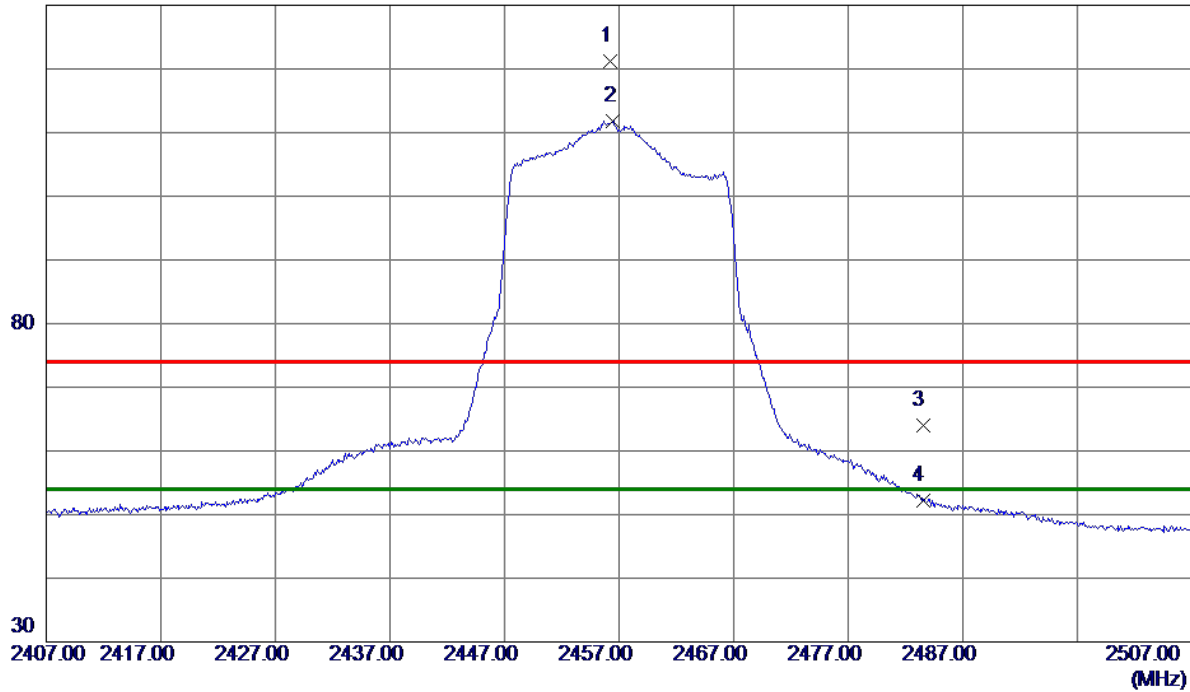


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2456.2000    | 113.08                     | 8.09                    | 121.17                    | 74.00           | 47.17        | Peak     | No Limit |
| 2 * | 2456.5000    | 103.68                     | 8.09                    | 111.77                    | 54.00           | 57.77        | AVG      | No Limit |
| 3   | 2483.5000    | 55.93                      | 8.11                    | 64.04                     | 74.00           | -9.96        | Peak     |          |
| 4   | 2483.5000    | 44.02                      | 8.11                    | 52.13                     | 54.00           | -1.87        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT20) Mode 2457 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

100 dBuV/m

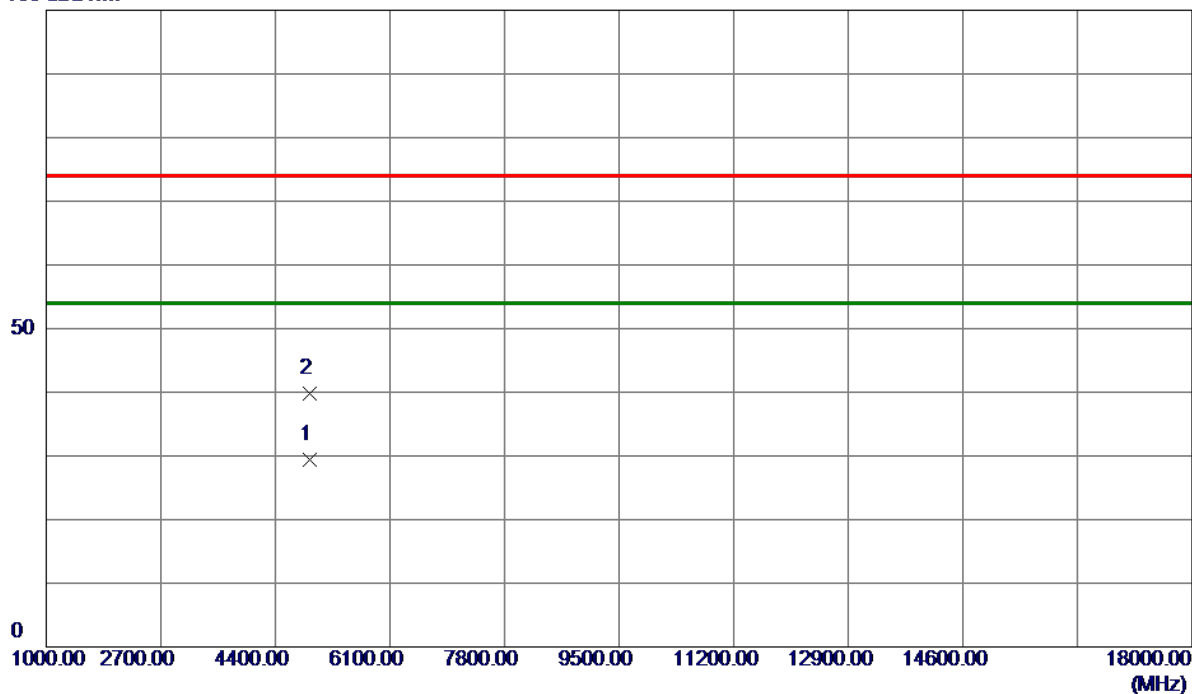


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4910.3800    | 25.72                      | 3.71                    | 29.43                     | 54.00           | -24.57       | AVG      |         |
| 2   | 4919.2599    | 36.09                      | 3.74                    | 39.83                     | 74.00           | -34.17       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT20) Mode 2462 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

130 dBuV/m

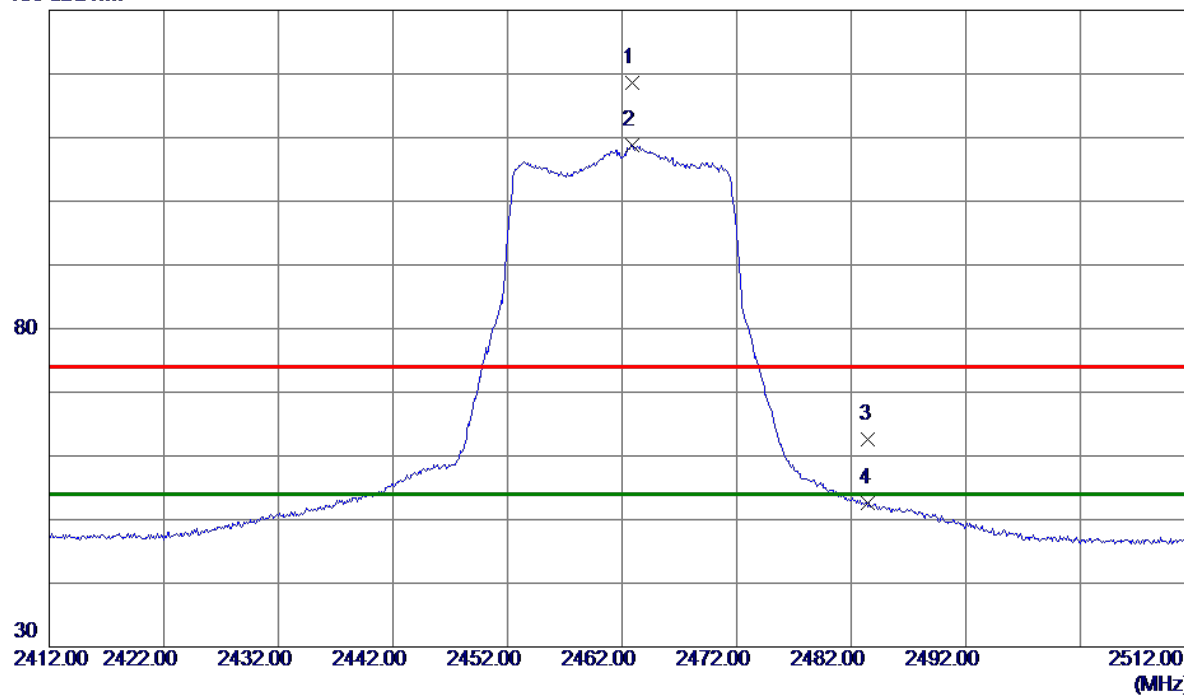

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2462.9000    | 110.56                     | 8.10                    | 118.66                    | 74.00           | 44.66        | Peak     | No Limit |
| 2 * | 2462.9000    | 100.64                     | 8.10                    | 108.74                    | 54.00           | 54.74        | AVG      | No Limit |
| 3   | 2483.5000    | 54.43                      | 8.11                    | 62.54                     | 74.00           | -11.46       | Peak     |          |
| 4   | 2483.5000    | 44.54                      | 8.11                    | 52.65                     | 54.00           | -1.35        | AVG      |          |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT20) Mode 2462 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

100 dBuV/m

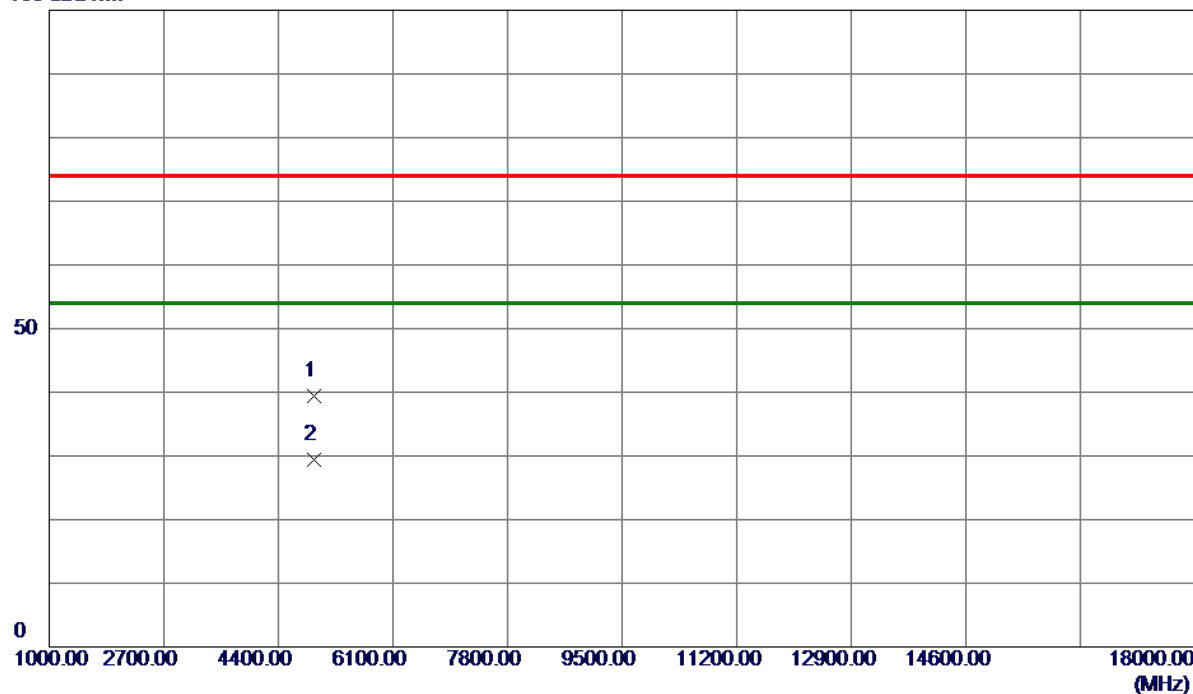

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4925.4000    | 35.65                      | 3.76                    | 39.41                     | 74.00           | -34.59       | Peak     |         |
| 2 * | 4931.1600    | 25.71                      | 3.78                    | 29.49                     | 54.00           | -24.51       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT40) Mode 2422 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

130 dBuV/m

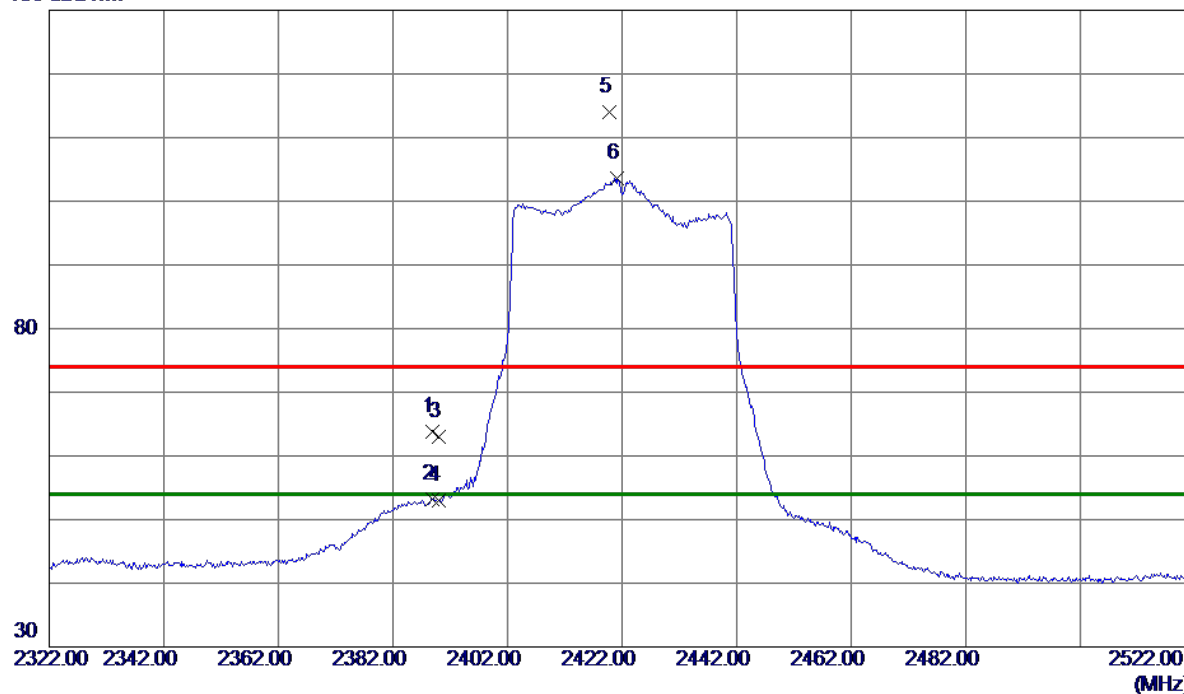


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2388.8000    | 55.72                      | 8.05                    | 63.77                     | 74.00           | -10.23       | Peak     |          |
| 2   | 2388.8000    | 45.18                      | 8.05                    | 53.23                     | 54.00           | -0.77        | AVG      |          |
| 3   | 2390.0000    | 54.93                      | 8.05                    | 62.98                     | 74.00           | -11.02       | Peak     |          |
| 4   | 2390.0000    | 45.01                      | 8.05                    | 53.06                     | 54.00           | -0.94        | AVG      |          |
| 5   | 2419.8000    | 106.02                     | 8.07                    | 114.09                    | 74.00           | 40.09        | Peak     | No Limit |
| 6 * | 2421.2000    | 95.49                      | 8.07                    | 103.56                    | 54.00           | 49.56        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT40) Mode 2422 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

100 dBuV/m

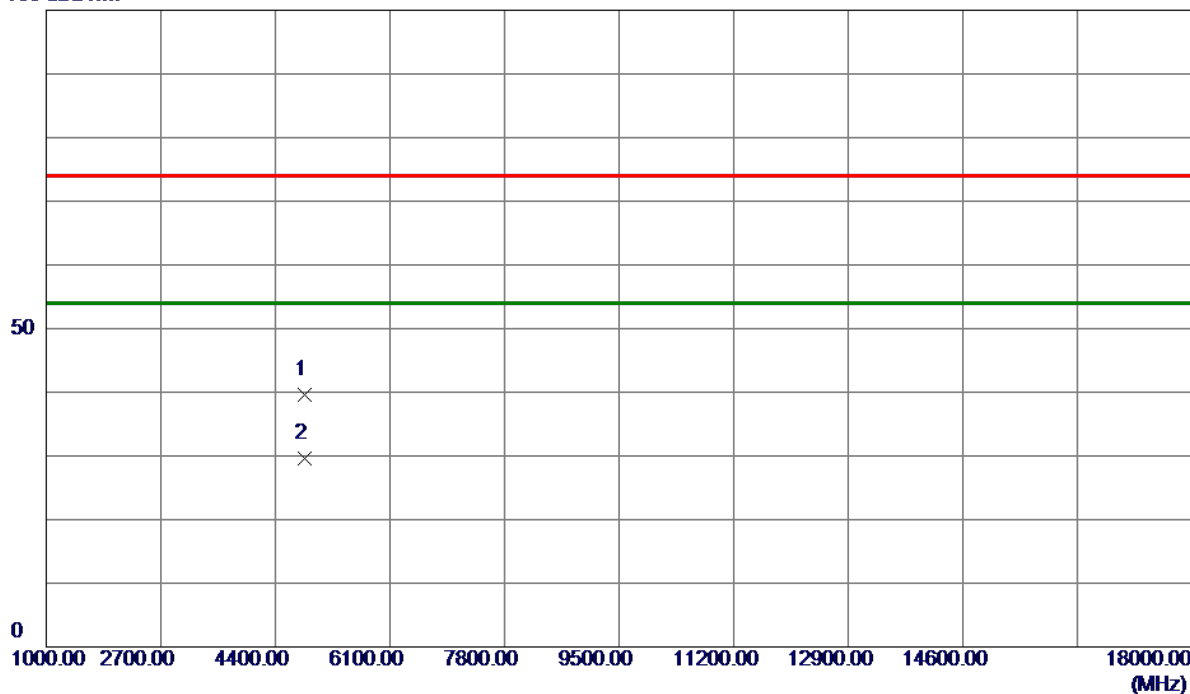

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4834.9200    | 36.09                      | 3.45                    | 39.54                     | 74.00           | -34.46       | Peak     |         |
| 2 * | 4836.8400    | 26.20                      | 3.45                    | 29.65                     | 54.00           | -24.35       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT40) Mode 2427 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

130 dBuV/m

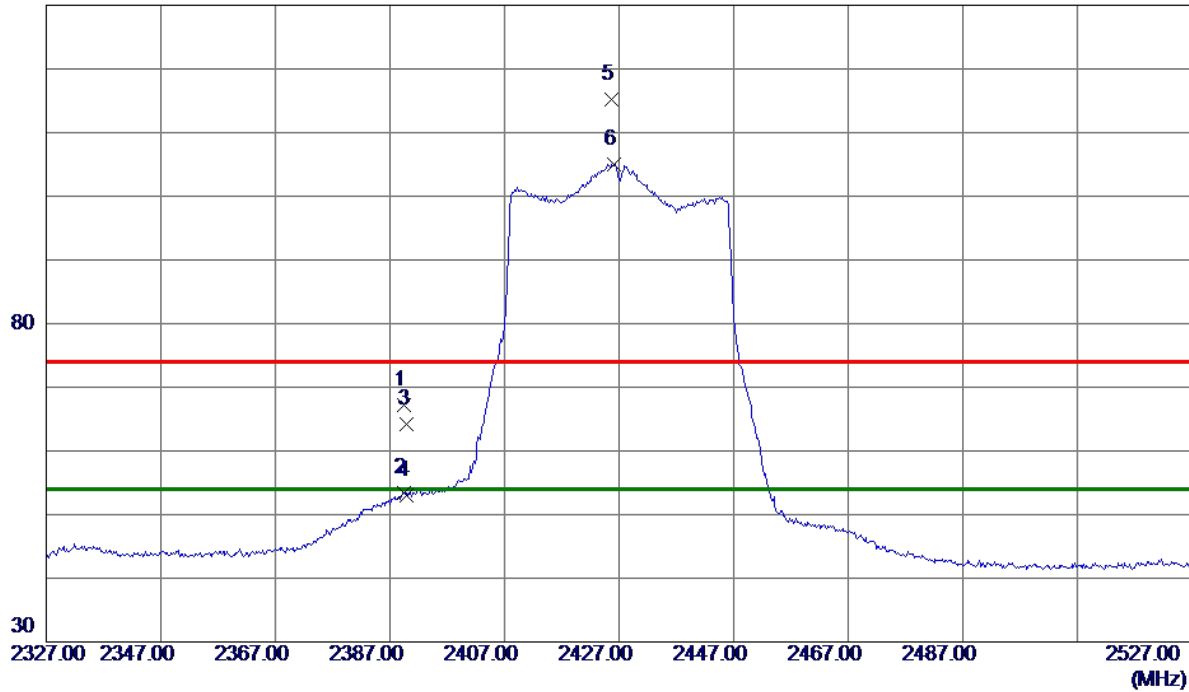

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2389.4000    | 59.08                      | 8.05                    | 67.13                     | 74.00           | -6.87        | Peak     |          |
| 2   | 2389.4000    | 45.35                      | 8.05                    | 53.40                     | 54.00           | -0.60        | AVG      |          |
| 3   | 2390.0000    | 56.10                      | 8.05                    | 64.15                     | 74.00           | -9.85        | Peak     |          |
| 4   | 2390.0000    | 44.86                      | 8.05                    | 52.91                     | 54.00           | -1.09        | AVG      |          |
| 5   | 2425.6000    | 107.22                     | 8.07                    | 115.29                    | 74.00           | 41.29        | Peak     | No Limit |
| 6 * | 2426.2000    | 97.00                      | 8.07                    | 105.07                    | 54.00           | 51.07        | AVG      | No Limit |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT40) Mode 2427 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

100 dBuV/m

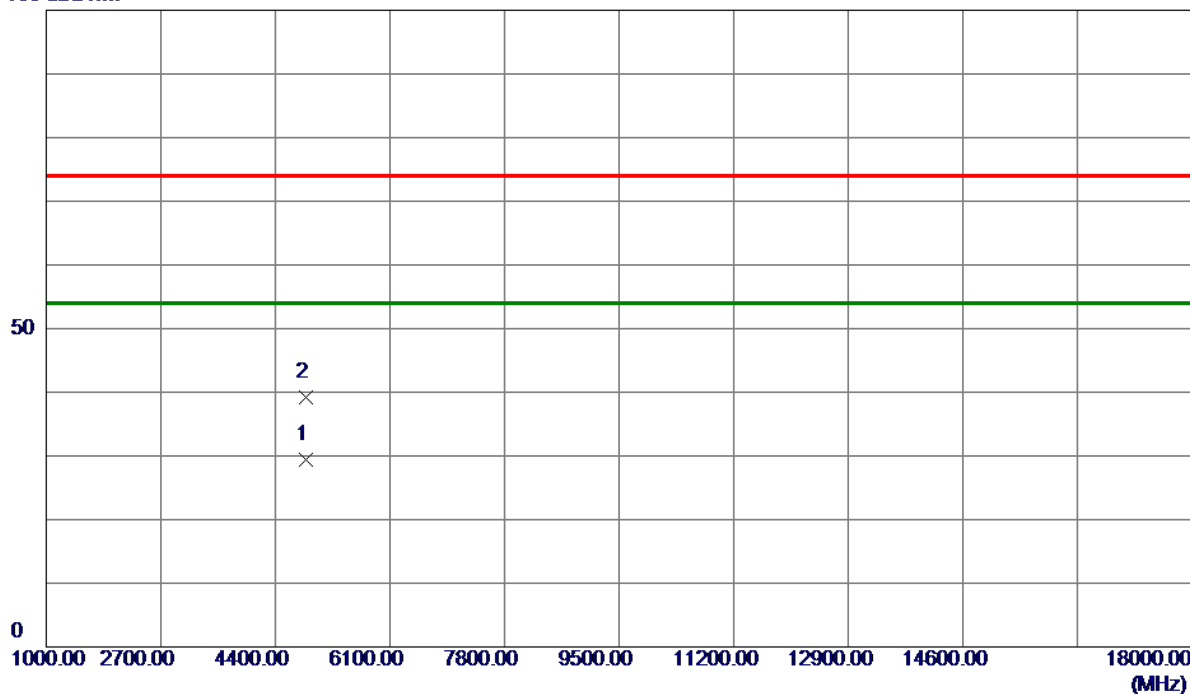


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4850.5000    | 25.82                      | 3.50                    | 29.32                     | 54.00           | -24.68       | AVG      |         |
| 2   | 4858.8600    | 35.74                      | 3.53                    | 39.27                     | 74.00           | -34.73       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT40) Mode 2437 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

130 dBuV/m

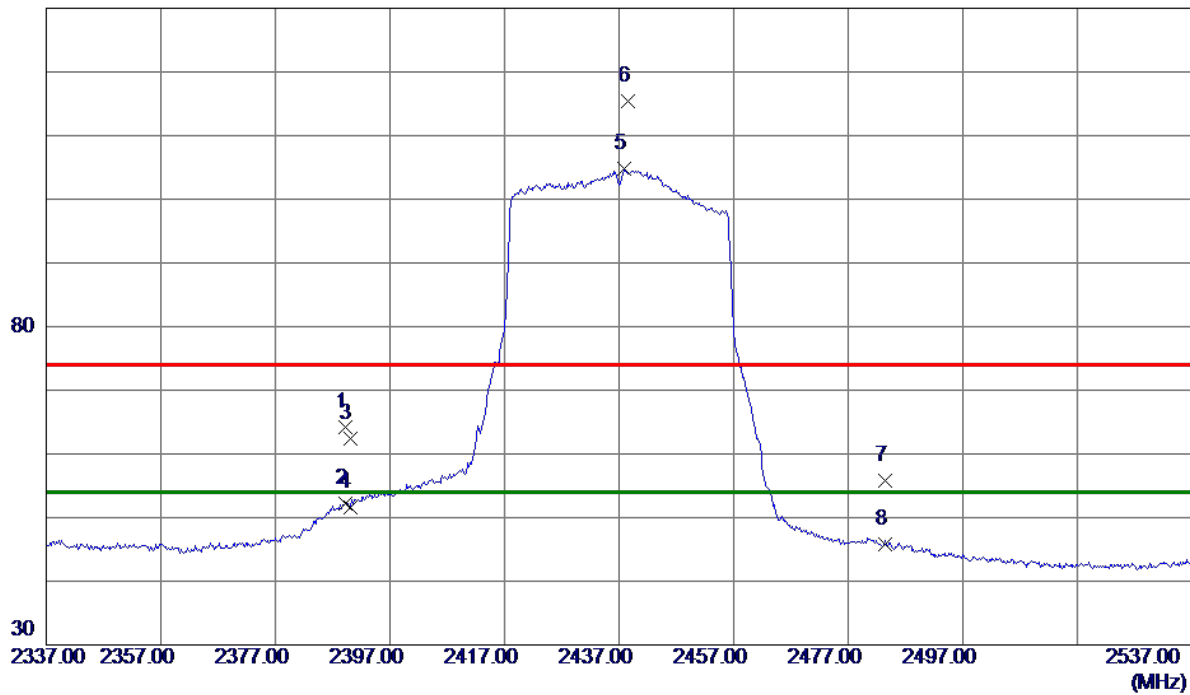

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2389.2000    | 56.13                      | 8.05                    | 64.18                     | 74.00           | -9.82        | Peak     |          |
| 2   | 2389.2000    | 44.07                      | 8.05                    | 52.12                     | 54.00           | -1.88        | AVG      |          |
| 3   | 2390.0000    | 54.38                      | 8.05                    | 62.43                     | 74.00           | -11.57       | Peak     |          |
| 4   | 2390.0000    | 43.63                      | 8.05                    | 51.68                     | 54.00           | -2.32        | AVG      |          |
| 5 * | 2437.8000    | 96.66                      | 8.08                    | 104.74                    | 54.00           | 50.74        | AVG      | No Limit |
| 6   | 2438.6000    | 107.26                     | 8.08                    | 115.34                    | 74.00           | 41.34        | Peak     | No Limit |
| 7   | 2483.5000    | 47.63                      | 8.11                    | 55.74                     | 74.00           | -18.26       | Peak     |          |
| 8   | 2483.5000    | 37.76                      | 8.11                    | 45.87                     | 54.00           | -8.13        | AVG      |          |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT40) Mode 2437 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

100 dBuV/m

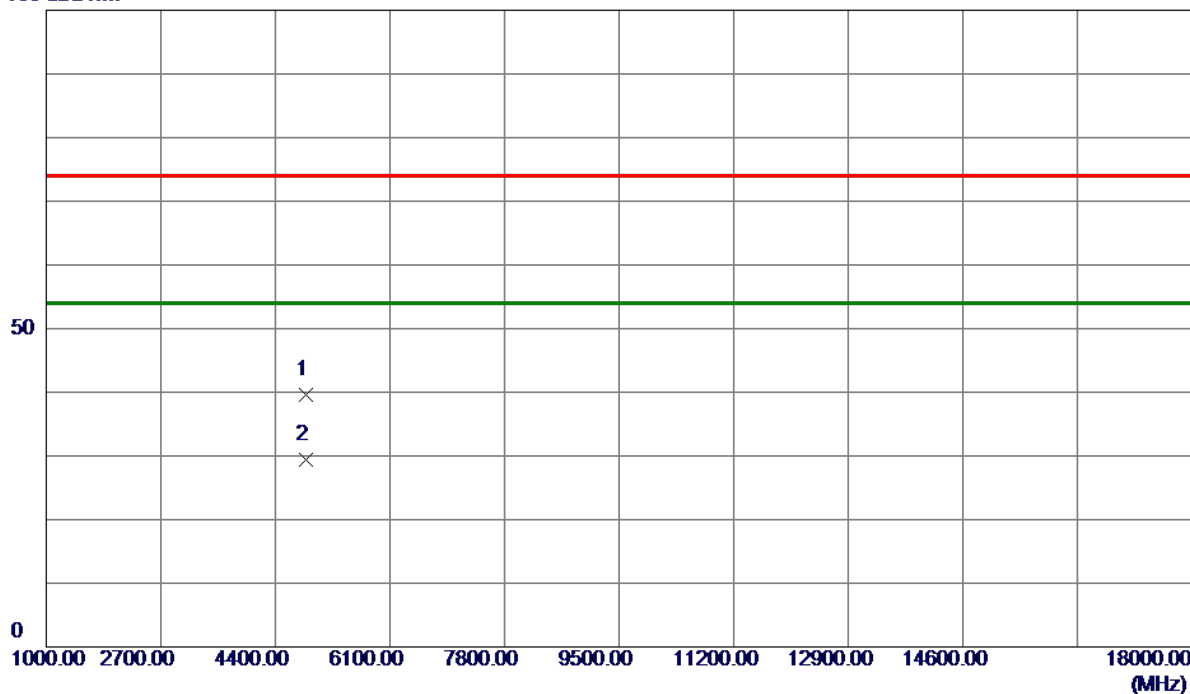


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4855.2400    | 36.11                      | 3.52                    | 39.63                     | 74.00           | -34.37       | Peak     |         |
| 2 * | 4862.5000    | 25.79                      | 3.54                    | 29.33                     | 54.00           | -24.67       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT40) Mode 2447 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

130 dBuV/m

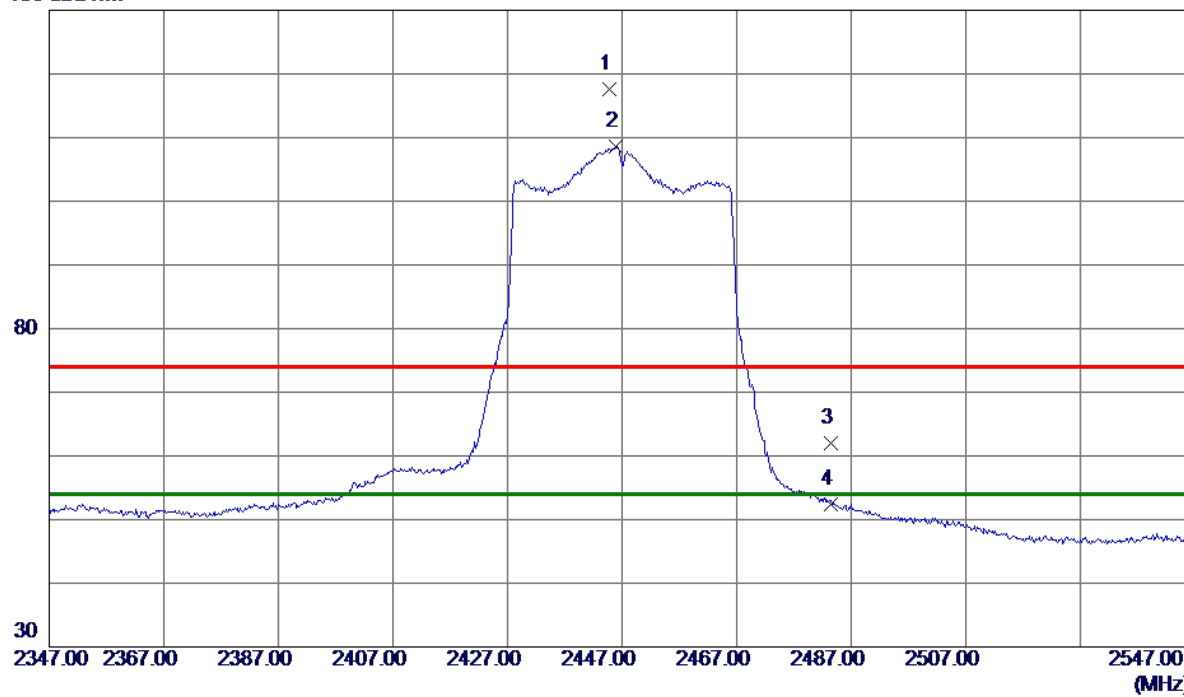

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2444.8000    | 109.51                     | 8.08                    | 117.59                    | 74.00           | 43.59        | Peak     | No Limit |
| 2 * | 2445.8000    | 100.44                     | 8.09                    | 108.53                    | 54.00           | 54.53        | AVG      | No Limit |
| 3   | 2483.5000    | 53.88                      | 8.11                    | 61.99                     | 74.00           | -12.01       | Peak     |          |
| 4   | 2483.5000    | 44.36                      | 8.11                    | 52.47                     | 54.00           | -1.53        | AVG      |          |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT40) Mode 2447 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

100 dBuV/m

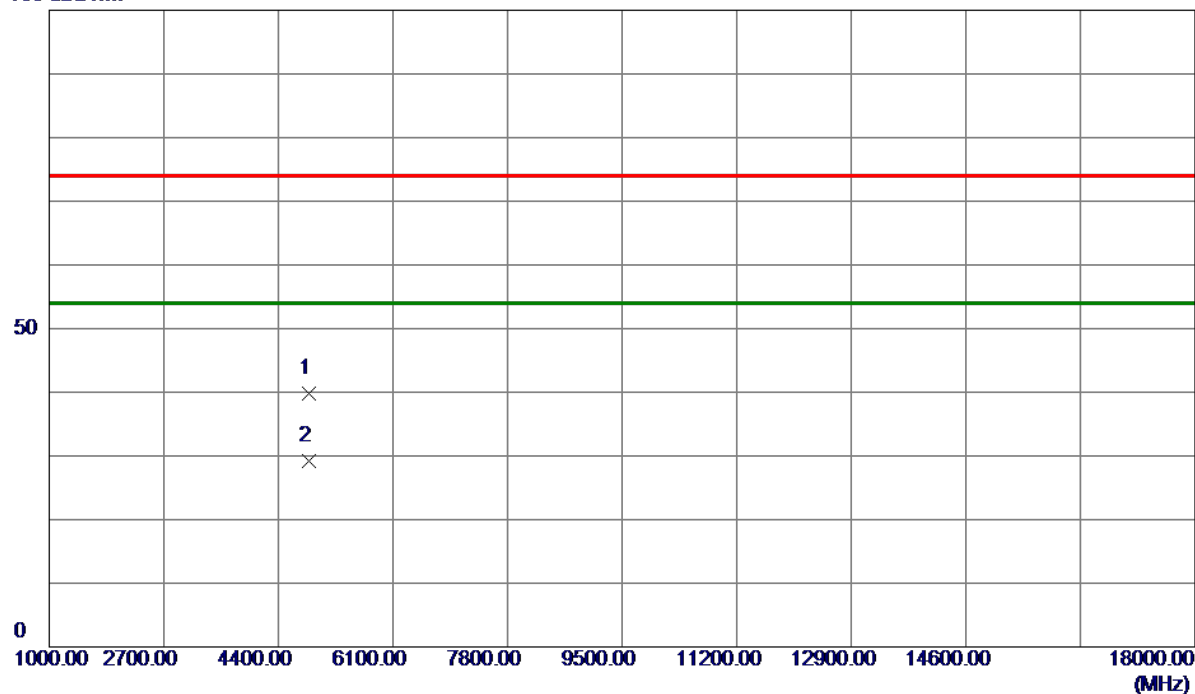

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4845.3000    | 36.28                      | 3.48                    | 39.76                     | 74.00           | -34.24       | Peak     |         |
| 2 * | 4856.0600    | 25.77                      | 3.52                    | 29.29                     | 54.00           | -24.71       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT40) Mode 2452 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

130 dBuV/m

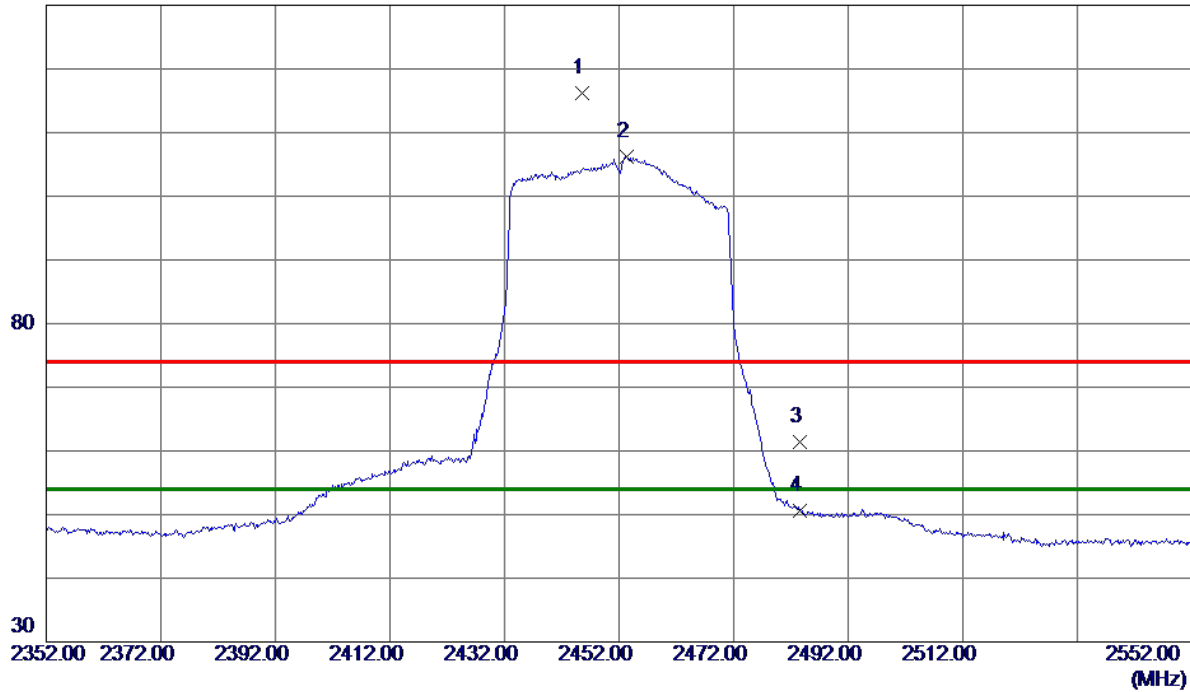

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2445.6000    | 108.10                     | 8.09                    | 116.19                    | 74.00           | 42.19        | Peak     | No Limit |
| 2 * | 2453.4000    | 98.13                      | 8.09                    | 106.22                    | 54.00           | 52.22        | AVG      | No Limit |
| 3   | 2483.5000    | 53.32                      | 8.11                    | 61.43                     | 74.00           | -12.57       | Peak     |          |
| 4   | 2483.5000    | 42.46                      | 8.11                    | 50.57                     | 54.00           | -3.43        | AVG      |          |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT40) Mode 2452 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

100 dBuV/m

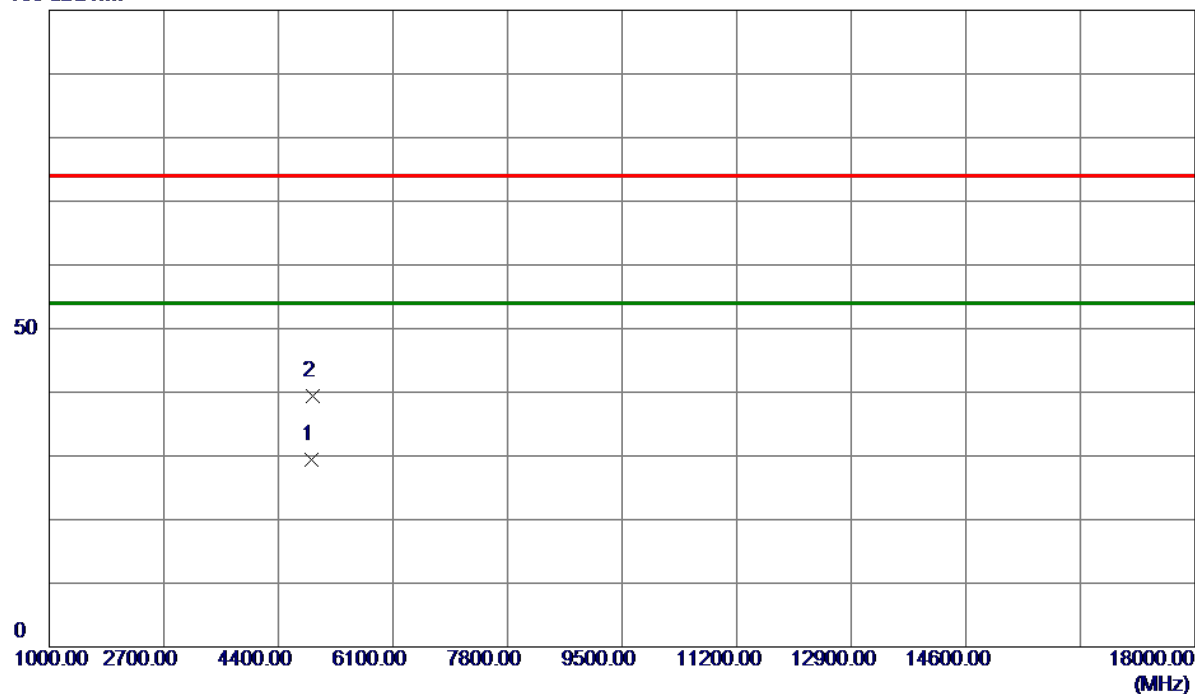


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4898.4800    | 25.72                      | 3.67                    | 29.39                     | 54.00           | -24.61       | AVG      |         |
| 2   | 4907.0600    | 35.74                      | 3.70                    | 39.44                     | 74.00           | -34.56       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | TX BE(EHT20) Mode 2437 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

86.9 dBuV/m

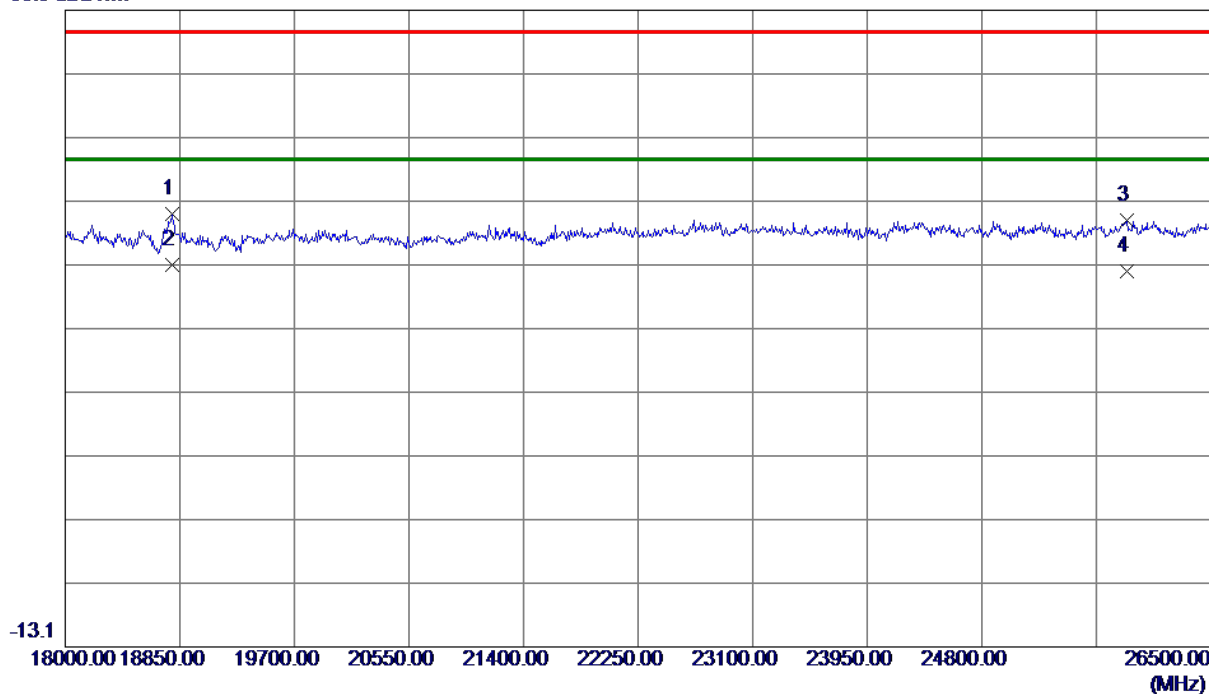


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 18790.5000   | 52.52                      | 2.39                    | 54.91                     | 83.50           | -28.59       | Peak     |         |
| 2 * | 18790.5000   | 44.60                      | 2.39                    | 46.99                     | 63.50           | -16.51       | AVG      |         |
| 3   | 25879.5000   | 48.15                      | 5.77                    | 53.92                     | 83.50           | -29.58       | Peak     |         |
| 4   | 25879.5000   | 40.22                      | 5.77                    | 45.99                     | 63.50           | -17.51       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | TX BE(EHT20) Mode 2437 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

86.9 dBuV/m

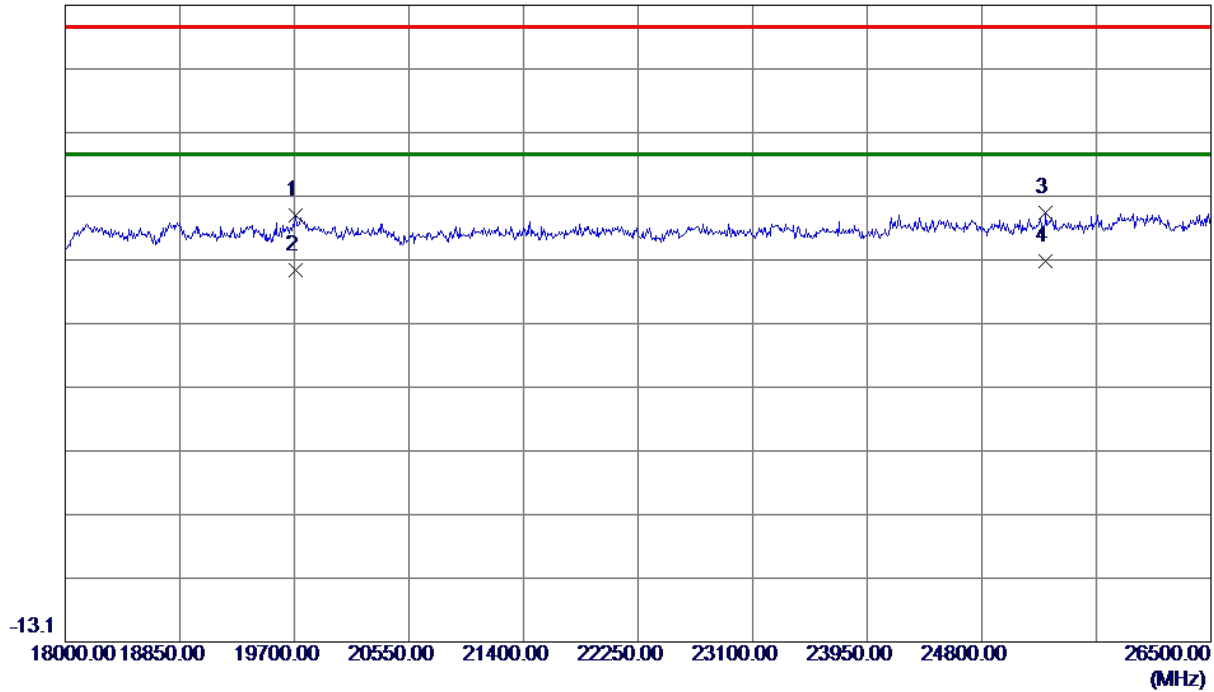


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 19708.5000   | 50.86                      | 3.06                    | 53.92                     | 83.50           | -29.58       | Peak     |         |
| 2   | 19708.5000   | 42.31                      | 3.06                    | 45.37                     | 63.50           | -18.13       | AVG      |         |
| 3   | 25276.0000   | 49.16                      | 5.09                    | 54.25                     | 83.50           | -29.25       | Peak     |         |
| 4 * | 25276.0000   | 41.59                      | 5.09                    | 46.68                     | 63.50           | -16.82       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**Worst case:**

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT20) Mode 2412 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

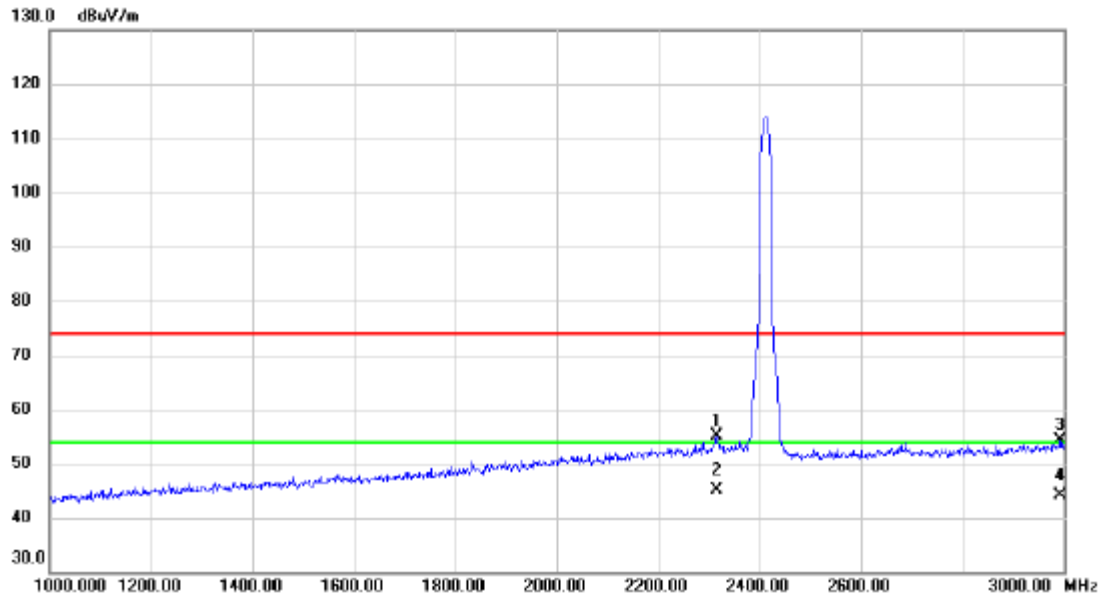


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 2316.000     | 47.09                    | 8.01                    | 55.10                      | 74.00           | -18.90       | peak     |         |
| 2   | *   | 2316.000     | 37.11                    | 8.01                    | 45.12                      | 54.00           | -8.88        | AVG      |         |
| 3   |     | 2994.000     | 43.95                    | 10.45                   | 54.40                      | 74.00           | -19.60       | peak     |         |
| 4   |     | 2994.000     | 33.57                    | 10.45                   | 44.02                      | 54.00           | -9.98        | AVG      |         |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |            |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX N(HT20) Mode 2412 MHz | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

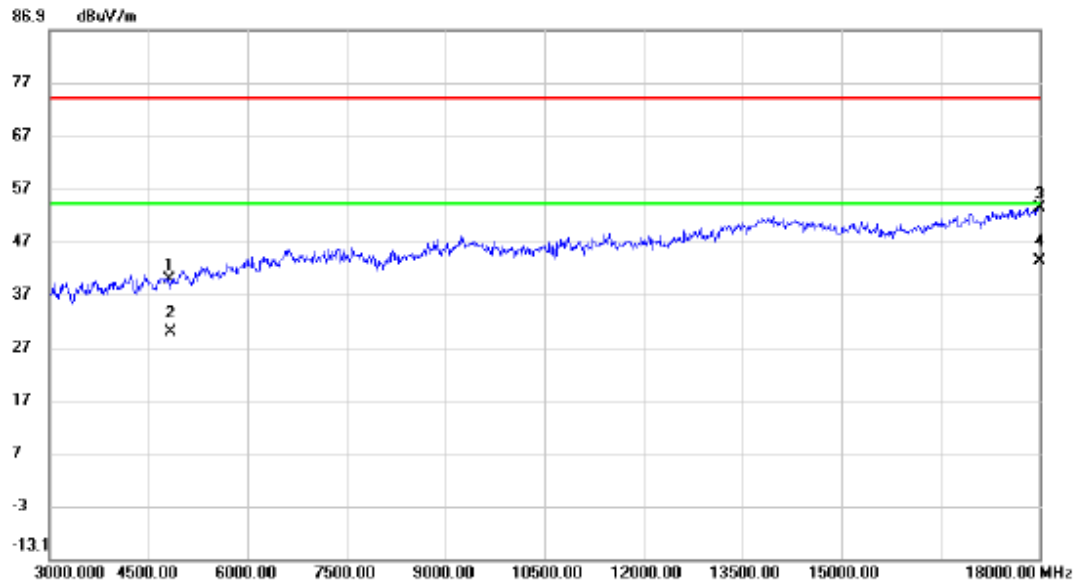

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 4814.200     | 36.37                    | 3.37                    | 39.74                      | 74.00           | -34.26       | peak     |         |
| 2   |     | 4821.820     | 26.41                    | 3.40                    | 29.81                      | 54.00           | -24.19       | AVG      |         |
| 3   |     | 18000.000    | 37.62                    | 15.68                   | 53.30                      | 74.00           | -20.70       | peak     |         |
| 4   | *   | 18000.000    | 27.51                    | 15.68                   | 43.19                      | 54.00           | -10.81       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

## APPENDIX E - BANDWIDTH

## Omnidirectional Antenna


|           |           |
|-----------|-----------|
| Test Mode | TX B Mode |
|-----------|-----------|

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | 6 dB Bandwidth Min. Limit (MHz) | Result |
|---------|-----------------|----------------------|-------------------------------|---------------------------------|--------|
| 01      | 2412            | 7.640                | 13.360                        | 0.5                             | Pass   |
| 06      | 2437            | 8.080                | 13.846                        | 0.5                             | Pass   |
| 11      | 2462            | 9.200                | 14.511                        | 0.5                             | Pass   |


CH01

CH06  
6 dB Bandwidth

CH11

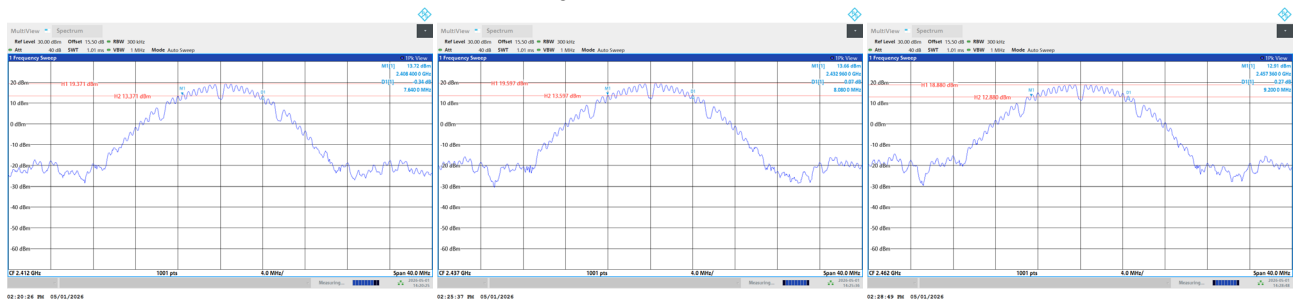

99 % Occupied Bandwidth

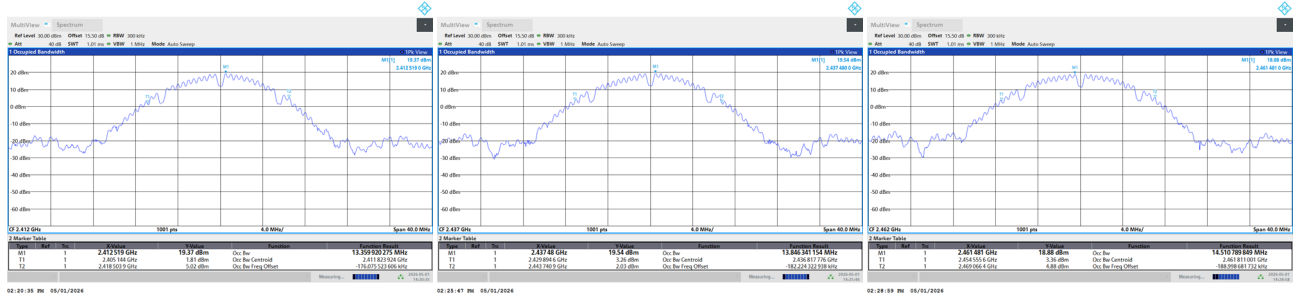


Test Mode TX G Mode

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | 6 dB Bandwidth Min. Limit (MHz) | Result |
|---------|-----------------|----------------------|-------------------------------|---------------------------------|--------|
| 01      | 2412            | 14.800               | 17.288                        | 0.5                             | Pass   |
| 06      | 2437            | 15.840               | 17.600                        | 0.5                             | Pass   |
| 11      | 2462            | 14.920               | 17.527                        | 0.5                             | Pass   |


CH01

CH06  
6 dB Bandwidth

CH11

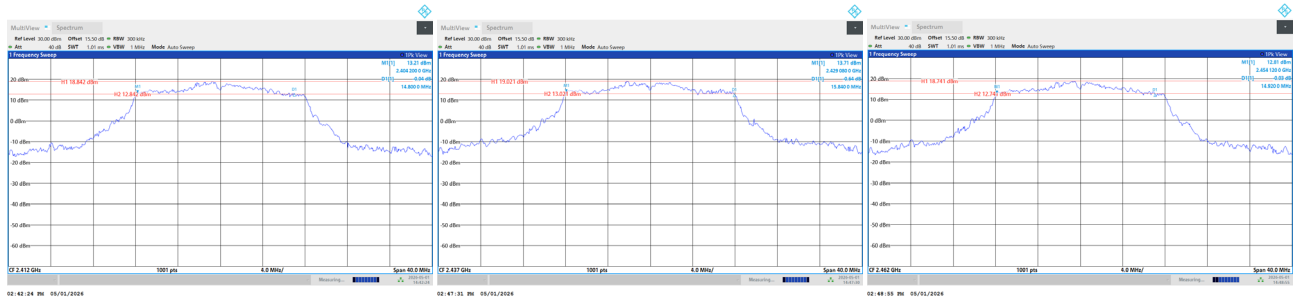

99 % Occupied Bandwidth

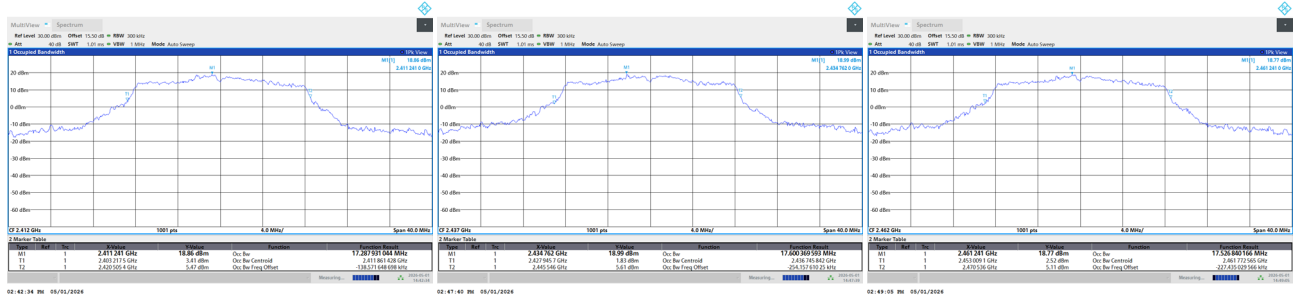


Test Mode TX N(HT20) Mode

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | 6 dB Bandwidth Min. Limit (MHz) | Result |
|---------|-----------------|----------------------|-------------------------------|---------------------------------|--------|
| 01      | 2412            | 17.400               | 18.032                        | 0.5                             | Pass   |
| 06      | 2437            | 16.800               | 18.248                        | 0.5                             | Pass   |
| 11      | 2462            | 16.600               | 18.157                        | 0.5                             | Pass   |


CH01

CH06  
6 dB Bandwidth

CH11

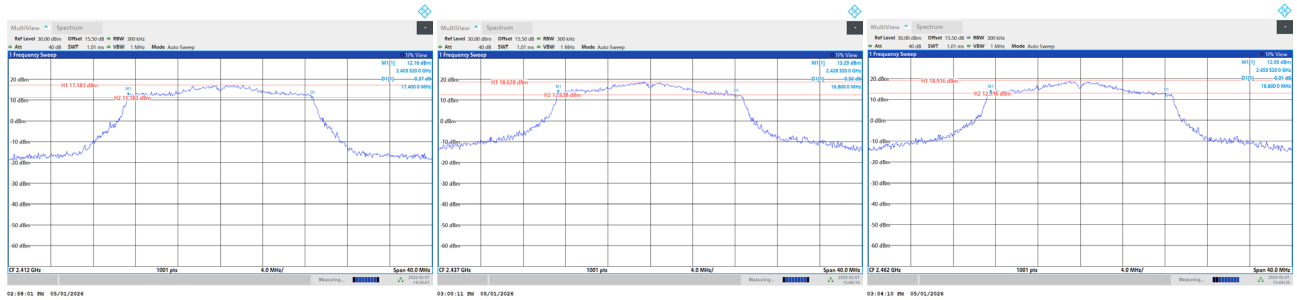

99 % Occupied Bandwidth

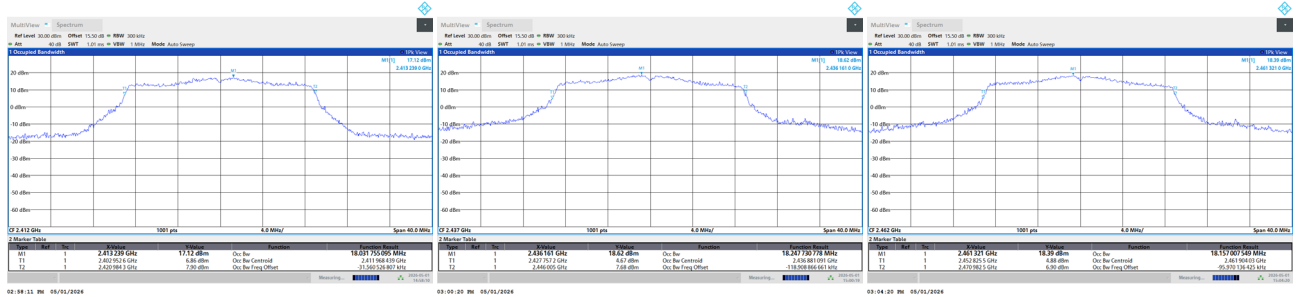


Test Mode TX N(HT40) Mode

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | 6 dB Bandwidth Min. Limit (MHz) | Result |
|---------|-----------------|----------------------|-------------------------------|---------------------------------|--------|
| 03      | 2422            | 34.960               | 36.953                        | 0.5                             | Pass   |
| 06      | 2437            | 35.600               | 37.355                        | 0.5                             | Pass   |
| 09      | 2452            | 35.280               | 37.435                        | 0.5                             | Pass   |


CH03

CH06  
6 dB Bandwidth

CH09

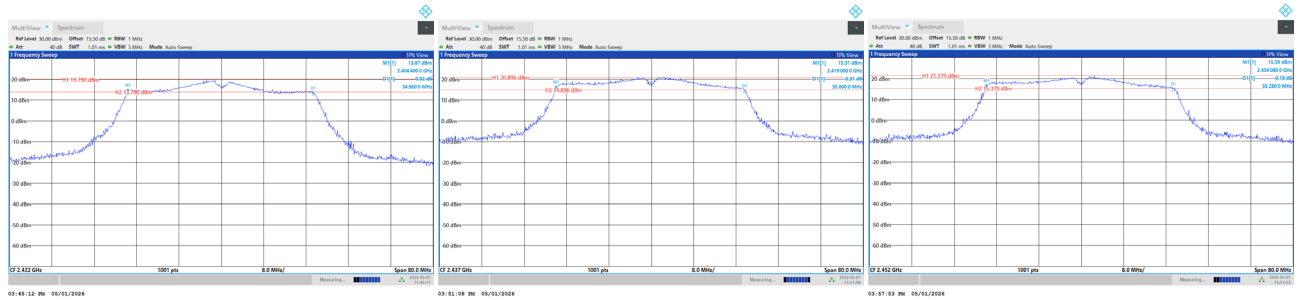

99 % Occupied Bandwidth

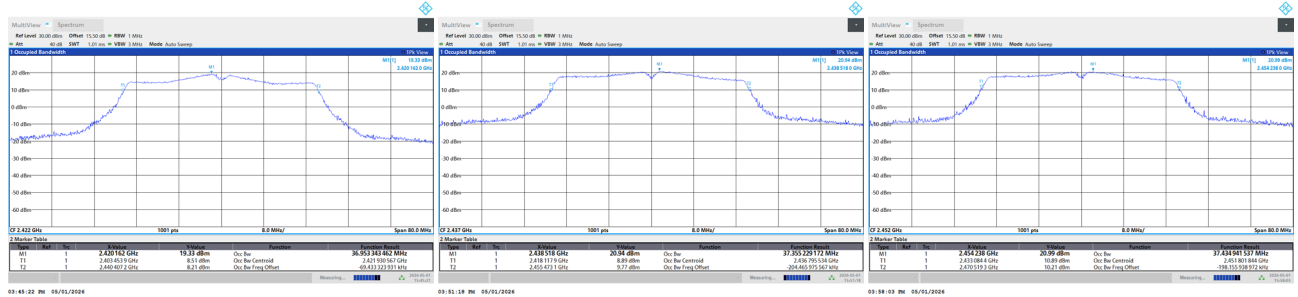


|           |                   |
|-----------|-------------------|
| Test Mode | TX BE(EHT20) Mode |
|-----------|-------------------|

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | 6 dB Bandwidth Min. Limit (MHz) | Result |
|---------|-----------------|----------------------|-------------------------------|---------------------------------|--------|
| 01      | 2412            | 18.880               | 19.032                        | 0.5                             | Pass   |
| 06      | 2437            | 18.840               | 19.049                        | 0.5                             | Pass   |
| 11      | 2462            | 18.440               | 18.908                        | 0.5                             | Pass   |


CH01

CH06  
6 dB Bandwidth

CH11

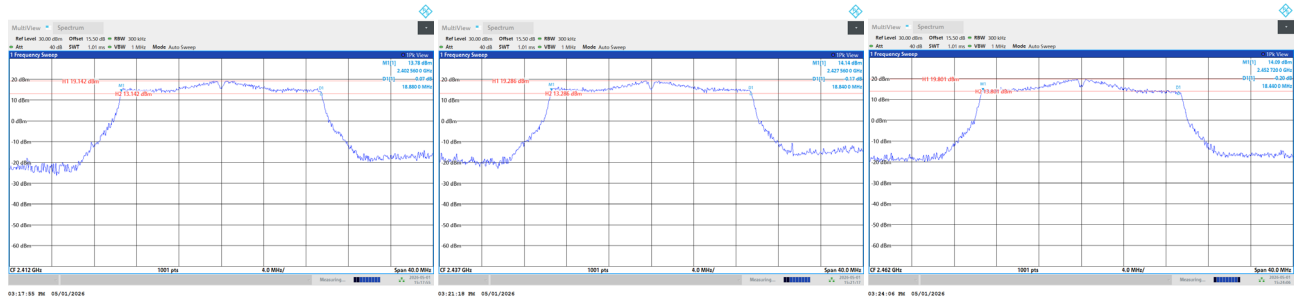

99 % Occupied Bandwidth

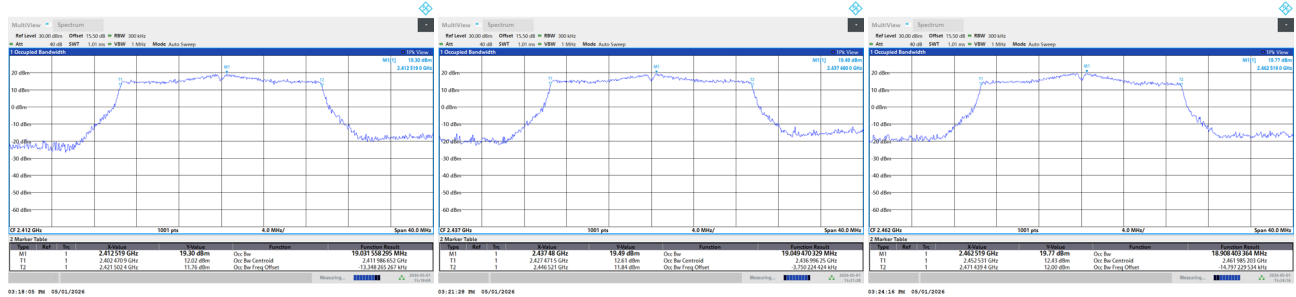


Test Mode TX BE(EHT40) Mode

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | 6 dB Bandwidth Min. Limit (MHz) | Result |
|---------|-----------------|----------------------|-------------------------------|---------------------------------|--------|
| 03      | 2422            | 37.120               | 38.105                        | 0.5                             | Pass   |
| 06      | 2437            | 36.240               | 38.154                        | 0.5                             | Pass   |
| 09      | 2452            | 36.640               | 38.271                        | 0.5                             | Pass   |

CH03

CH06  
6 dB Bandwidth

CH09

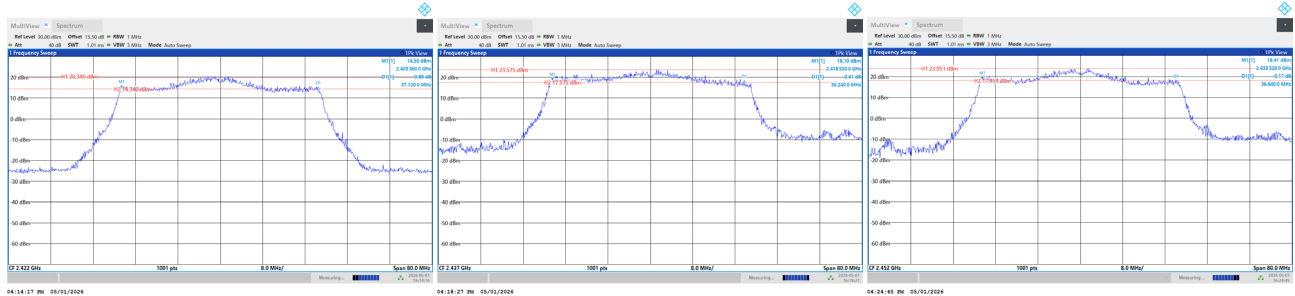

99 % Occupied Bandwidth

