


Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Polarization	Ant 90°
-----------	--	--------------	---------

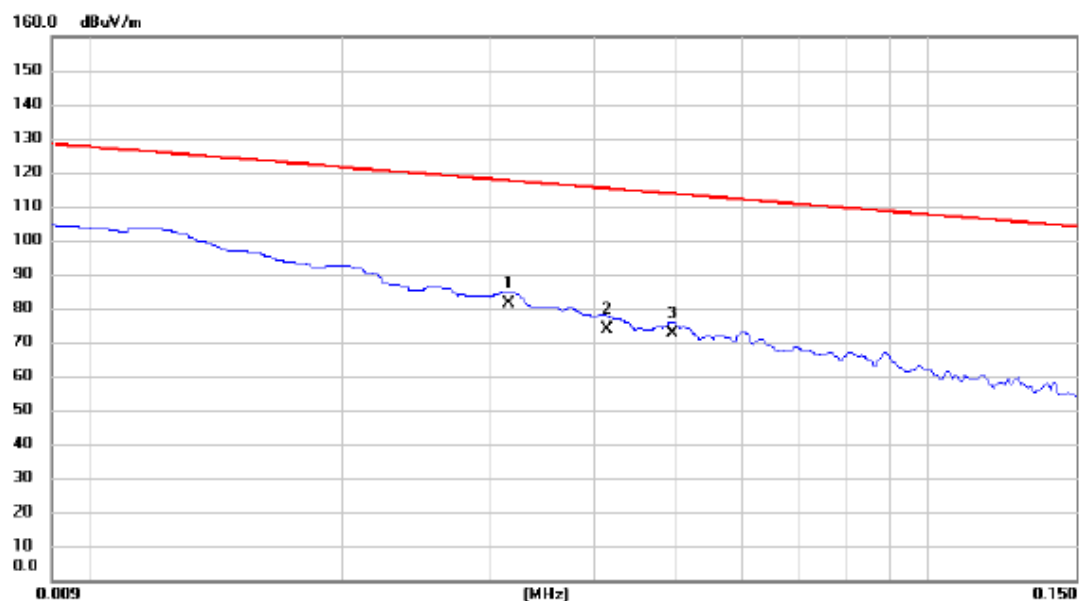


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.032	60.74	20.56	81.30	117.61	-36.31	AVG	
2	0.041	53.06	20.61	73.67	115.29	-41.62	AVG	
3	0.050	51.92	20.65	72.57	113.71	-41.14	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Polarization	Ant 90°
-----------	--	--------------	---------

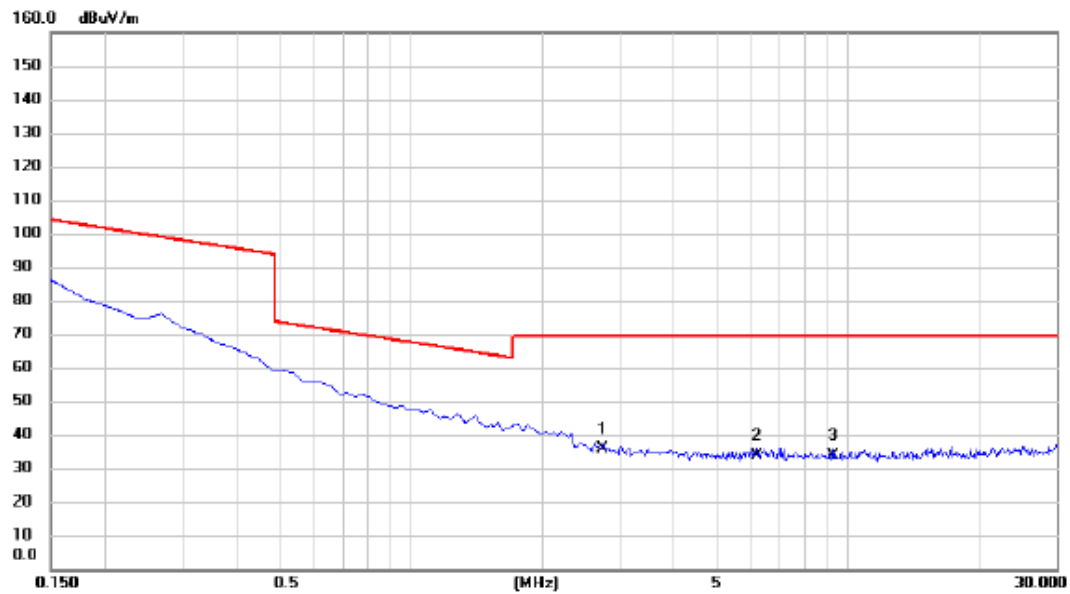

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2.747	15.42	20.34	35.76	69.54	-33.78	QP	
2	6.180	13.59	20.39	33.98	69.54	-35.56	QP	
3	9.284	13.13	20.49	33.62	69.54	-35.92	QP	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Omnidirectional Antenna

Test Mode	TX AC(VHT40) Mode Channel 46 (UNII-1)	Polarization	Vertical
-----------	---------------------------------------	--------------	----------

80 dBuV/m

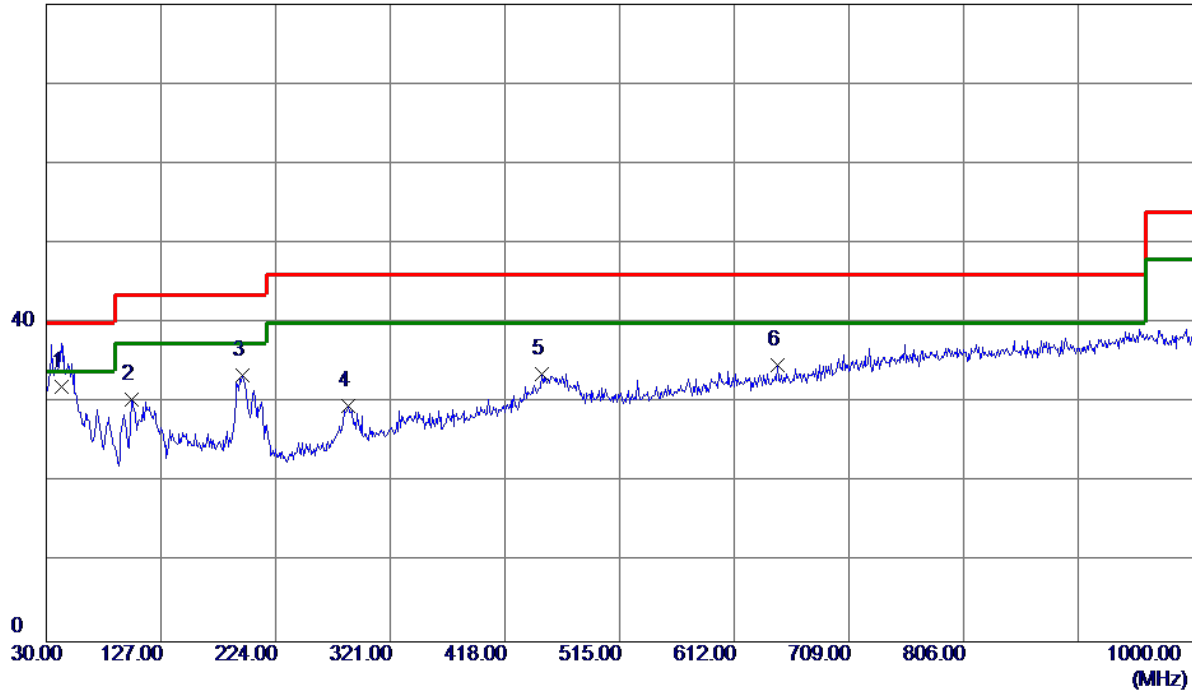


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	42. 6100	43. 48	-11. 50	31. 98	40. 00	-8. 02	QP	
2	101. 7800	45. 62	-15. 16	30. 46	43. 52	-13. 06	Peak	
3	195. 8700	46. 71	-13. 20	33. 51	43. 52	-10. 01	Peak	
4	285. 1099	39. 78	-10. 14	29. 64	46. 02	-16. 38	Peak	
5	449. 0400	39. 72	-6. 09	33. 63	46. 02	-12. 39	Peak	
6	648. 8600	37. 62	-2. 95	34. 67	46. 02	-11. 35	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT40) Mode Channel 46 (UNII-1)	Polarization	Horizontal
-----------	---------------------------------------	--------------	------------

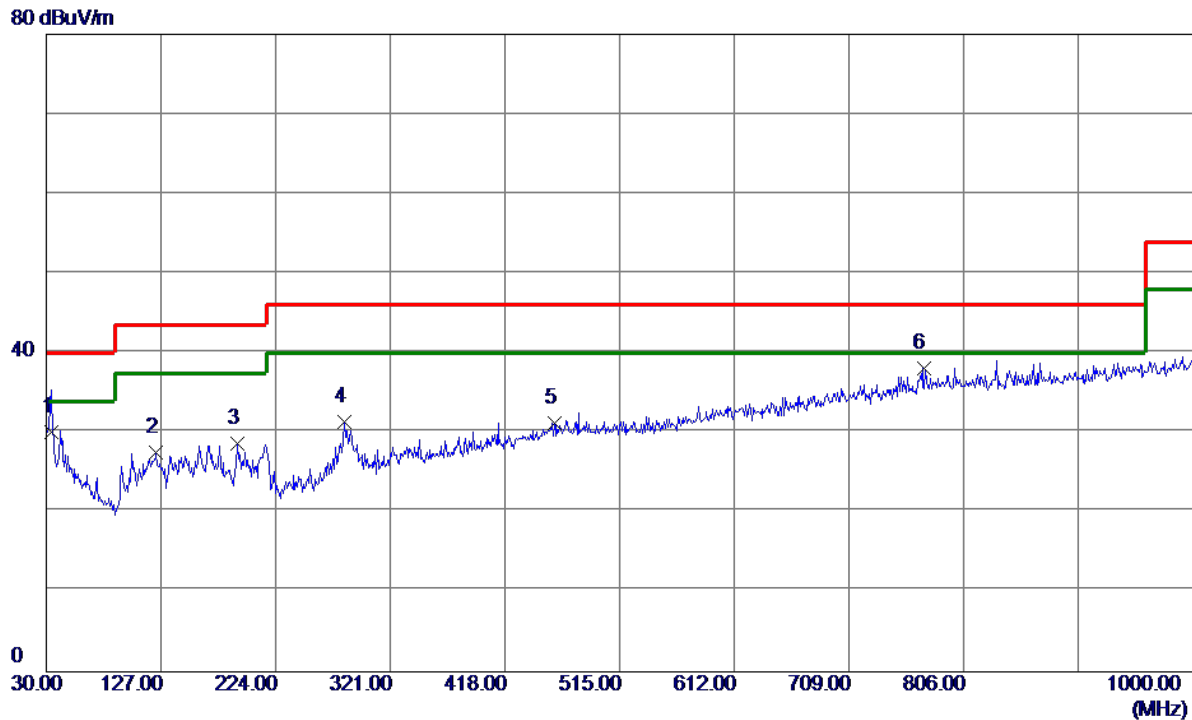

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	33.8800	42.48	-12.43	30.05	40.00	-9.95	Peak	
2	123.1200	40.70	-13.12	27.58	43.52	-15.94	Peak	
3	191.9900	41.41	-12.83	28.58	43.52	-14.94	Peak	
4	282.2000	41.53	-10.22	31.31	46.02	-14.71	Peak	
5	459.7100	37.20	-5.93	31.27	46.02	-14.75	Peak	
6 *	772.0500	38.80	-0.72	38.08	46.02	-7.94	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Directional Antenna

Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Polarization	Vertical
-----------	--	--------------	----------

80 dBuV/m

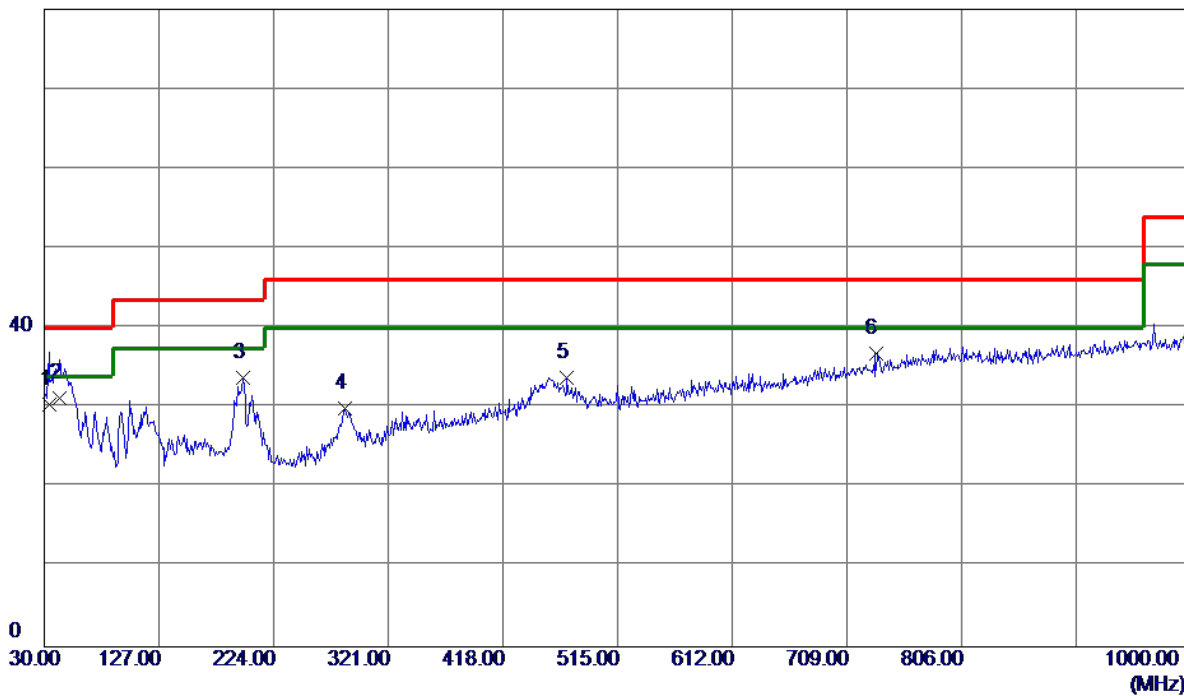


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	33.8800	42.79	-12.43	30.36	40.00	-9.64	QP	
2 *	42.6100	42.76	-11.50	31.26	40.00	-8.74	QP	
3	197.8100	47.13	-13.38	33.75	43.52	-9.77	Peak	
4	284.1400	40.13	-10.17	29.96	46.02	-16.06	Peak	
5	472.3200	39.54	-5.75	33.79	46.02	-12.23	Peak	
6	733.2500	38.27	-1.40	36.87	46.02	-9.15	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC(VHT20) Mode Channel 149 (UNII-3)	Polarization	Horizontal
-----------	--	--------------	------------

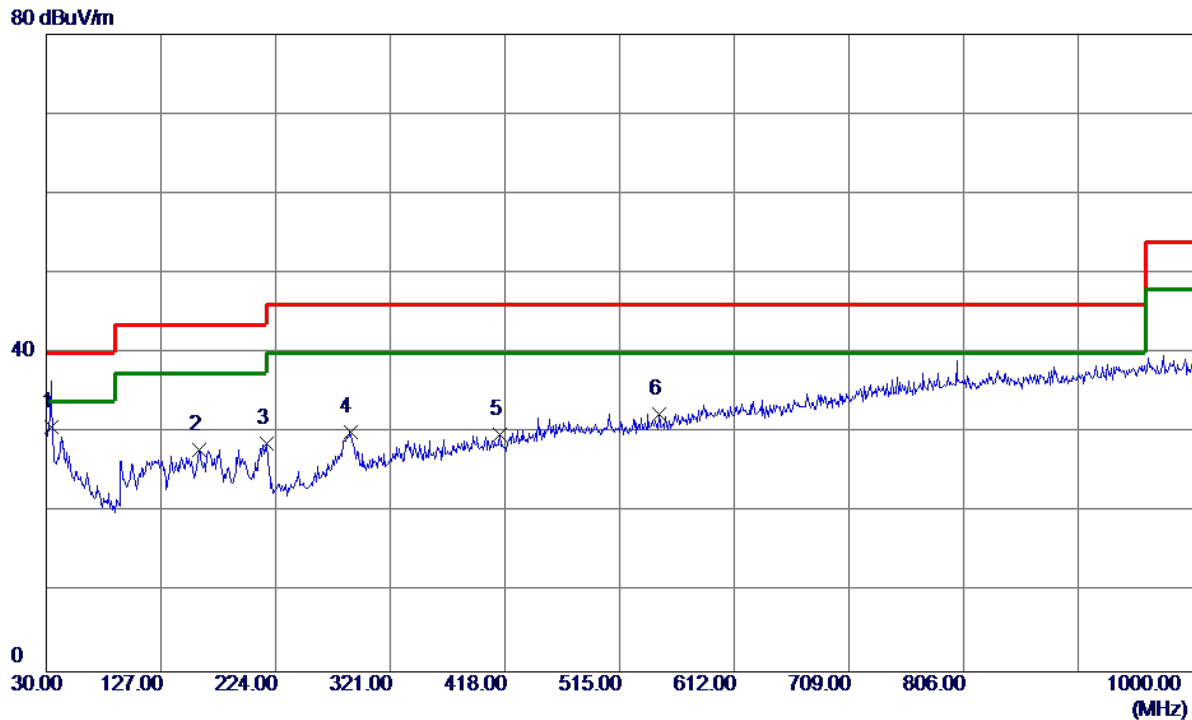

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	33.8800	43.12	-12.43	30.69	40.00	-9.31	QP	
2	159.0100	38.54	-10.67	27.87	43.52	-15.65	Peak	
3	216.2400	42.42	-13.79	28.63	46.02	-17.39	Peak	
4	287.0500	40.10	-10.08	30.02	46.02	-16.00	Peak	
5	414.1200	36.94	-7.19	29.75	46.02	-16.27	Peak	
6	547.9800	37.12	-4.77	32.35	46.02	-13.67	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Omnidirectional Antenna

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

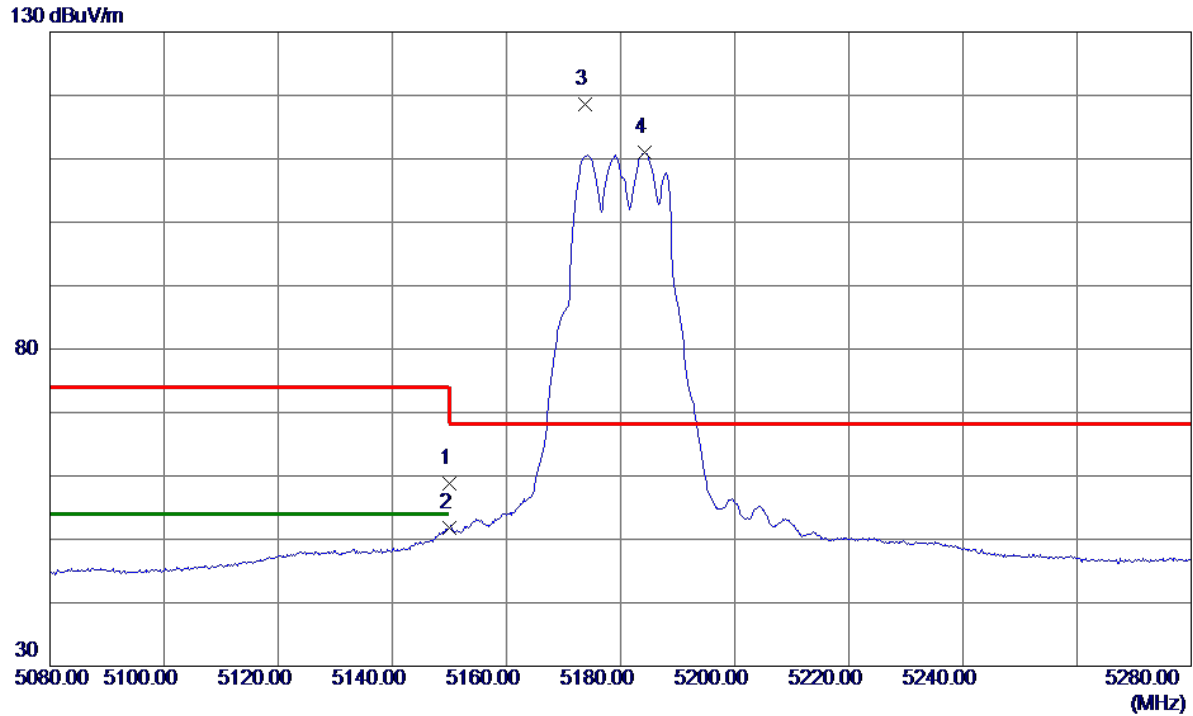


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	44.44	14.45	58.89	74.00	-15.11	Peak	
2	5150.0000	37.29	14.45	51.74	54.00	-2.26	AVG	
3 *	5173.8000	104.12	14.52	118.64	68.20	50.44	Peak	No Limit
4	5184.2000	96.40	14.55	110.95	999.00	-888.05	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

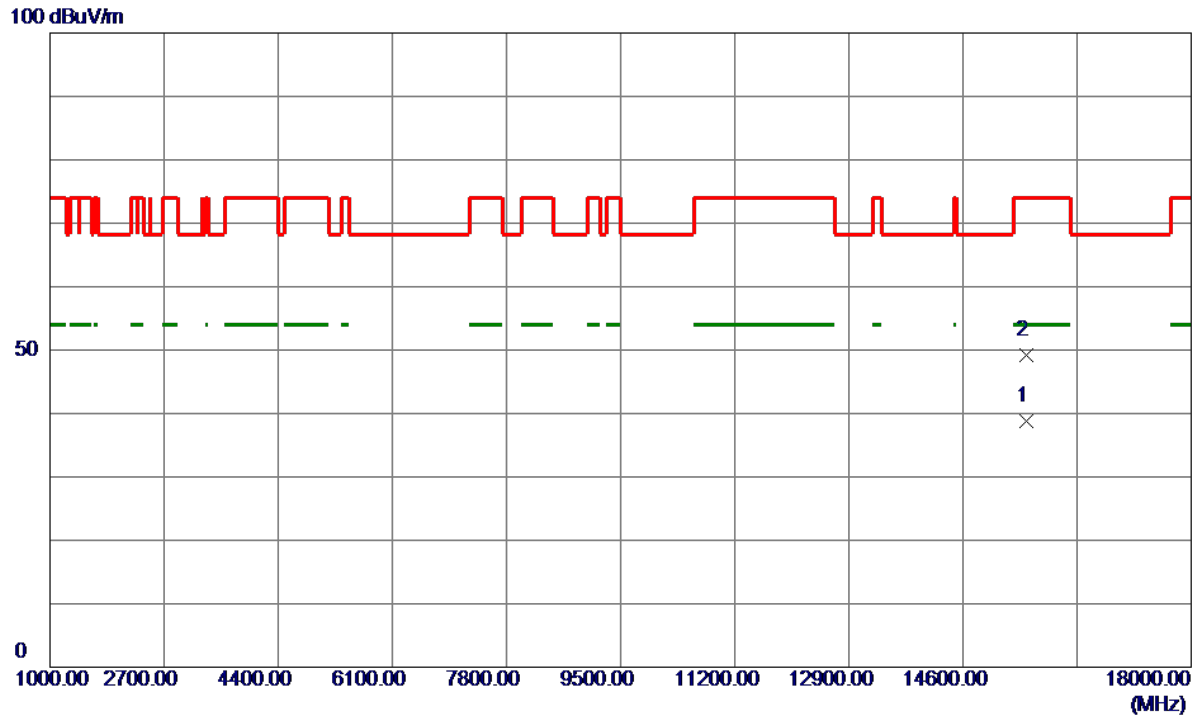


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	15542.8300	26.23	12.64	38.87	54.00	-15.13	AVG	
2	15544.6100	36.51	12.64	49.15	74.00	-24.85	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

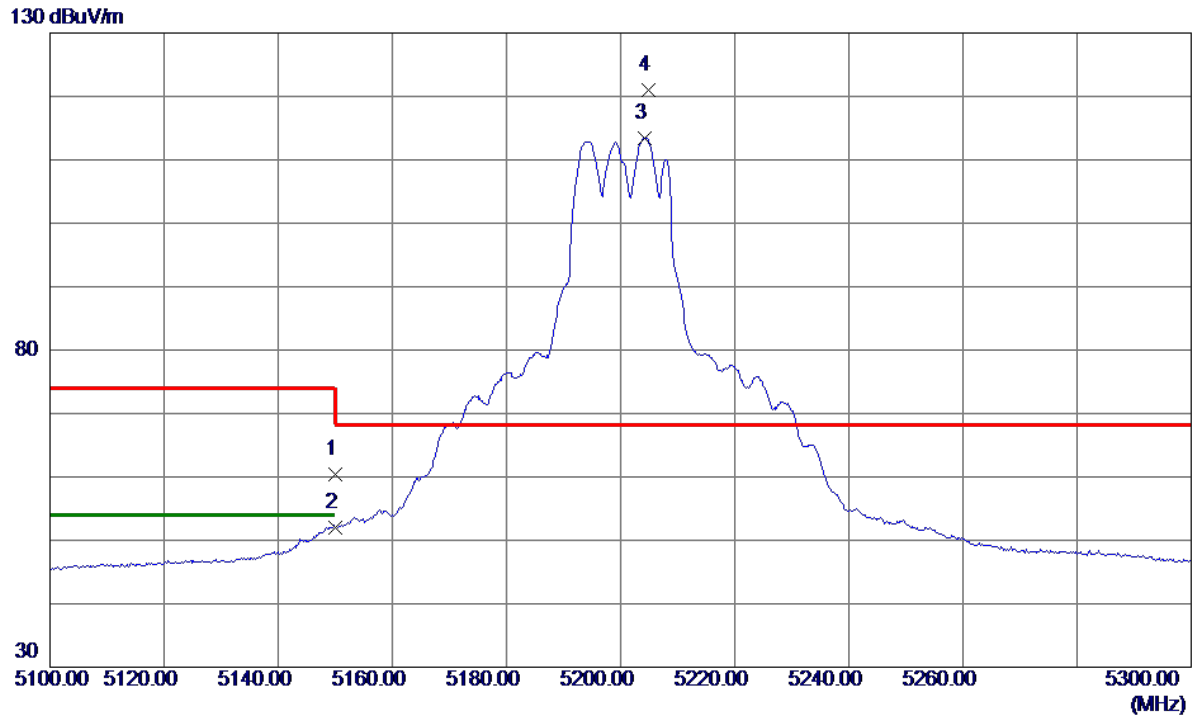


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	45.88	14.45	60.33	74.00	-13.67	Peak	
2	5150.0000	37.63	14.45	52.08	54.00	-1.92	AVG	
3	5204.2000	98.81	14.61	113.42	999.00	-885.58	AVG	No Limit
4 *	5204.8000	106.35	14.61	120.96	68.20	52.76	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

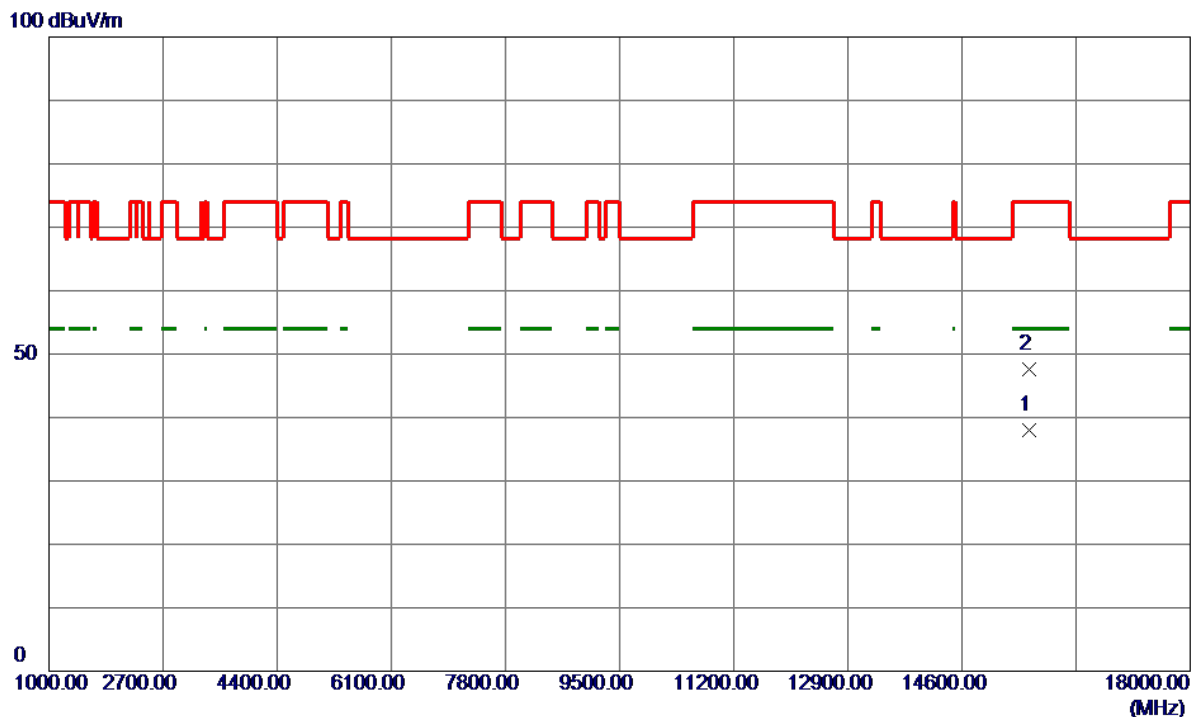


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15601.3300	25.37	12.68	38.05	54.00	-15.95	AVG	
2	15602.9400	34.93	12.69	47.62	74.00	-26.38	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

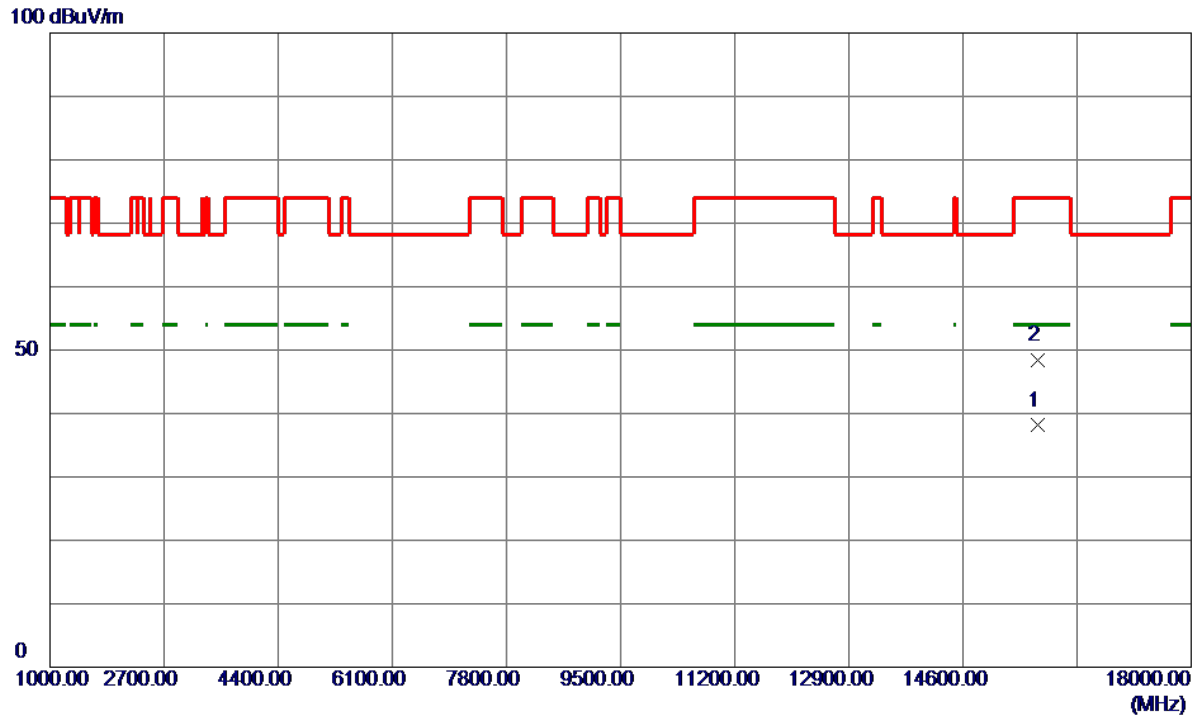


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15717.0700	25.32	12.78	38.10	54.00	-15.90	AVG	
2	15718.4300	35.60	12.78	48.38	74.00	-25.62	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

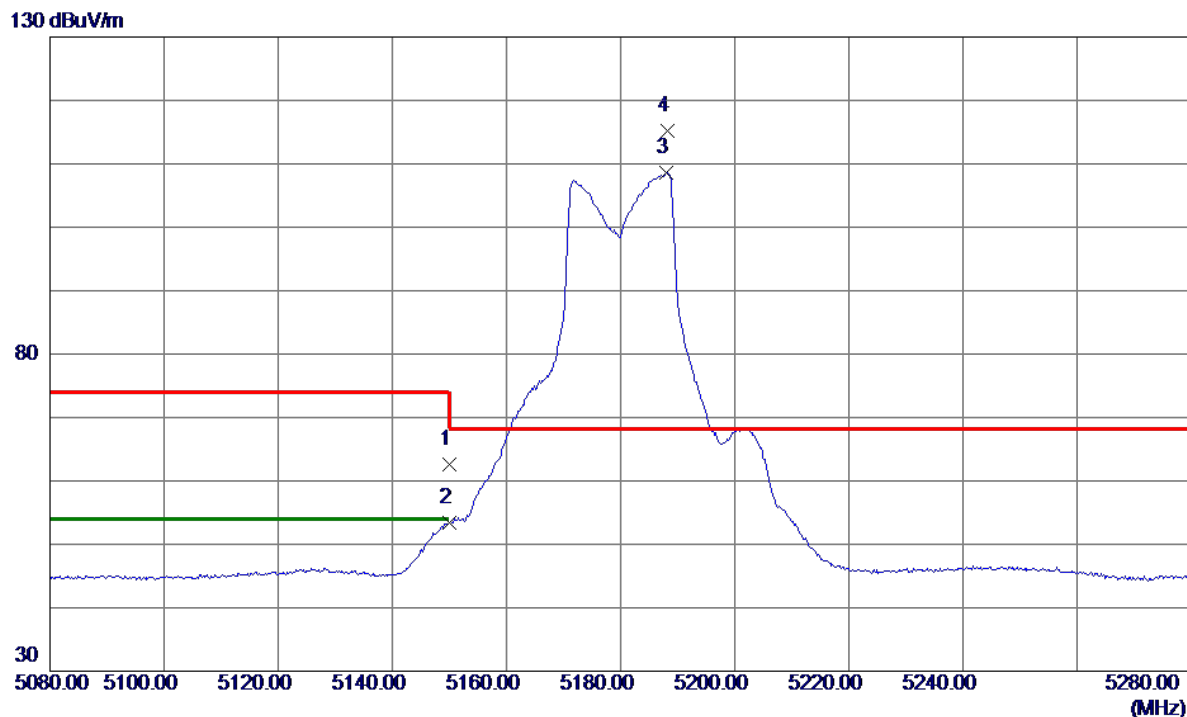


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	48.16	14.45	62.61	74.00	-11.39	Peak	
2	5150.0000	38.86	14.45	53.31	54.00	-0.69	AVG	
3	5188.0000	94.02	14.56	108.58	999.00	-890.42	AVG	No Limit
4 *	5188.2000	100.67	14.56	115.23	68.20	47.03	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

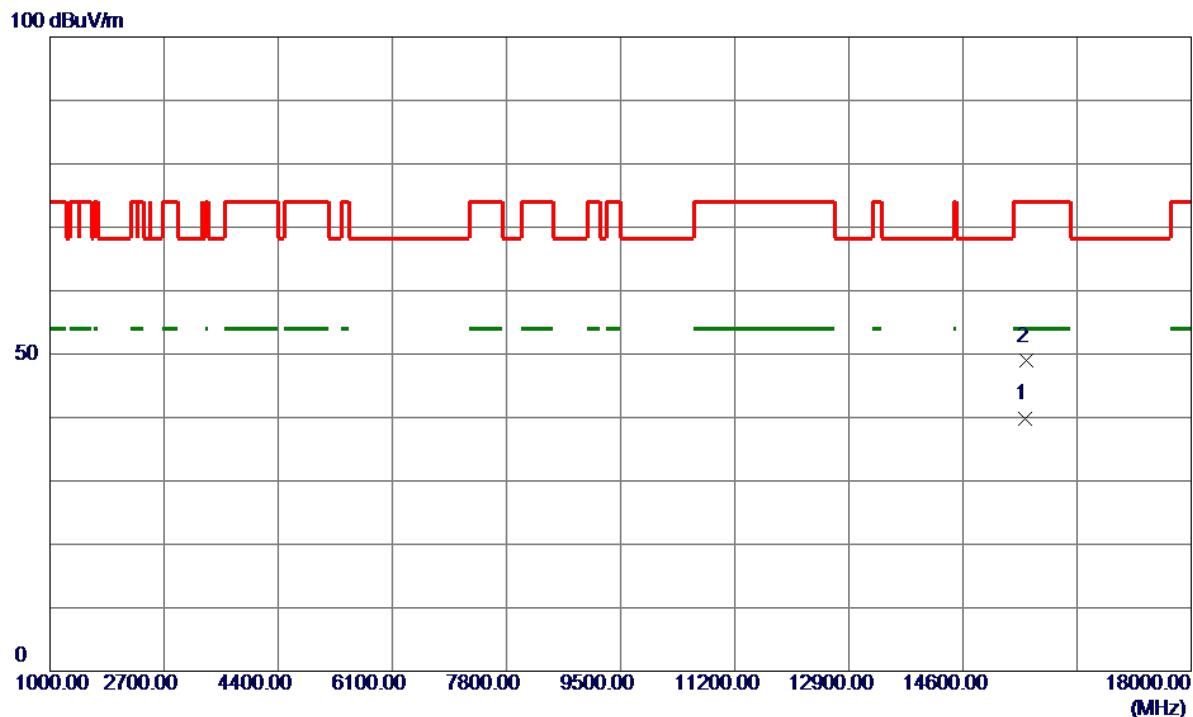


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15533.8000	27.10	12.63	39.73	54.00	-14.27	AVG	
2	15539.9000	36.26	12.64	48.90	74.00	-25.10	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

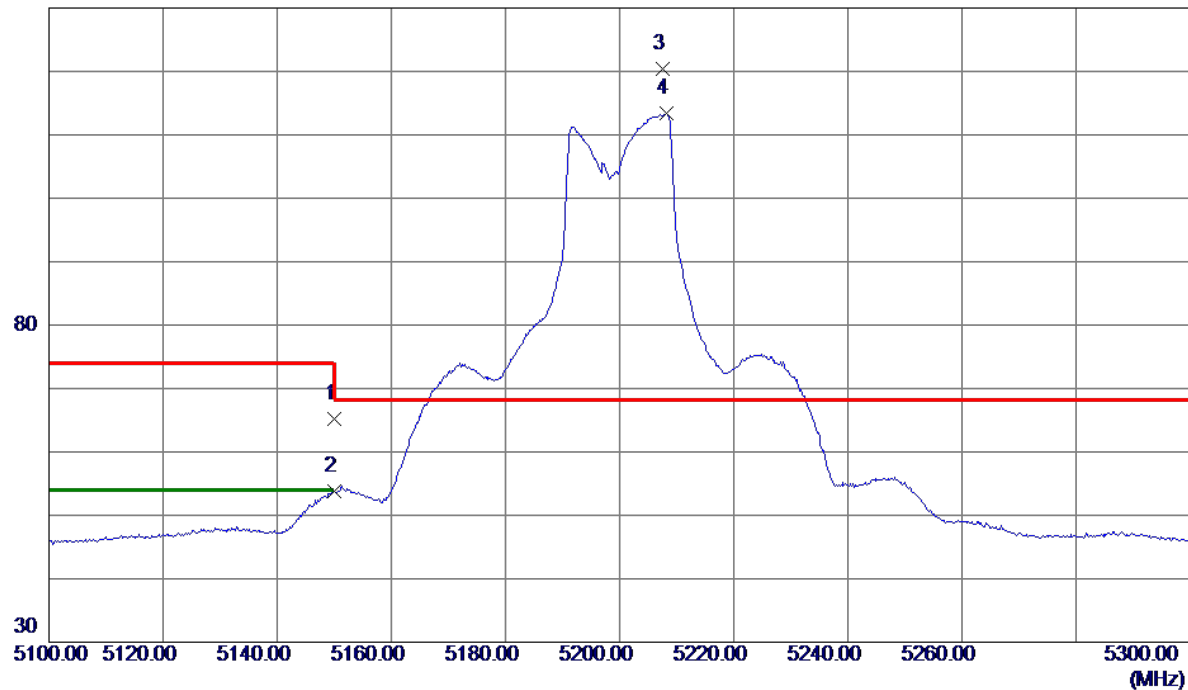


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	50.67	14.45	65.12	74.00	-8.88	Peak	
2	5150.0000	39.26	14.45	53.71	54.00	-0.29	AVG	
3 *	5207.6000	105.73	14.62	120.35	68.20	52.15	Peak	No Limit
4	5208.2000	98.77	14.62	113.39	999.00	-885.61	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

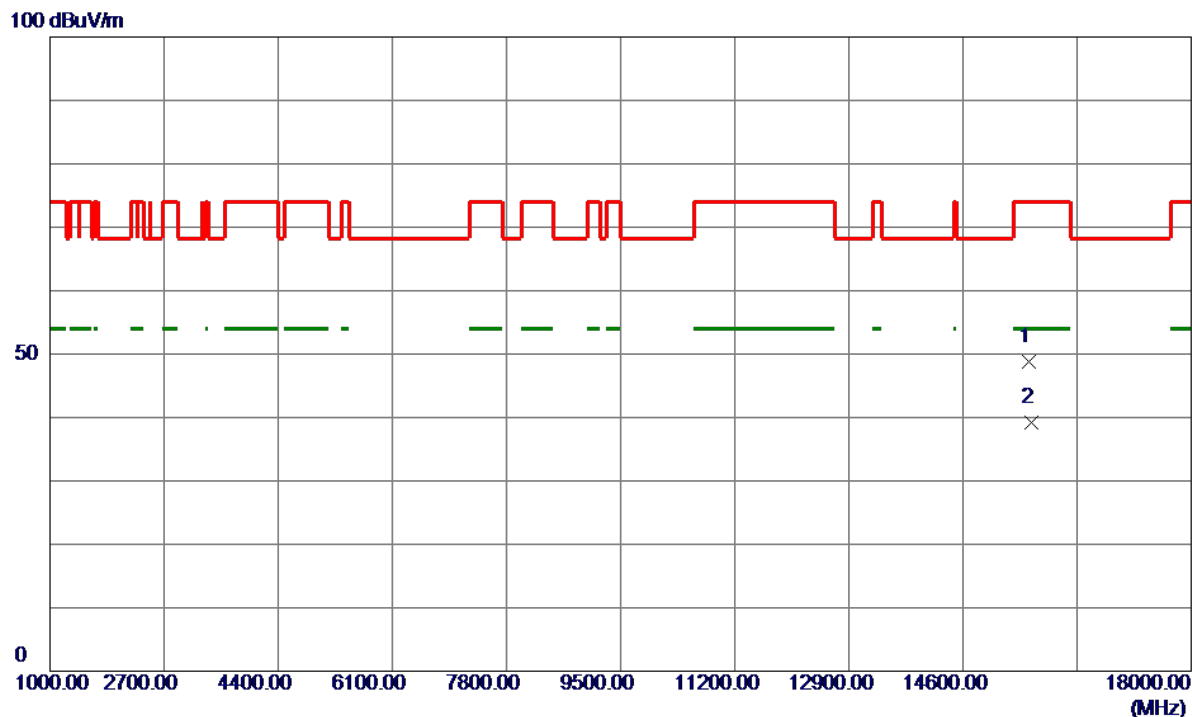


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15590.4500	36.16	12.68	48.84	74.00	-25.16	Peak	
2 *	15611.9000	26.50	12.69	39.19	54.00	-14.81	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

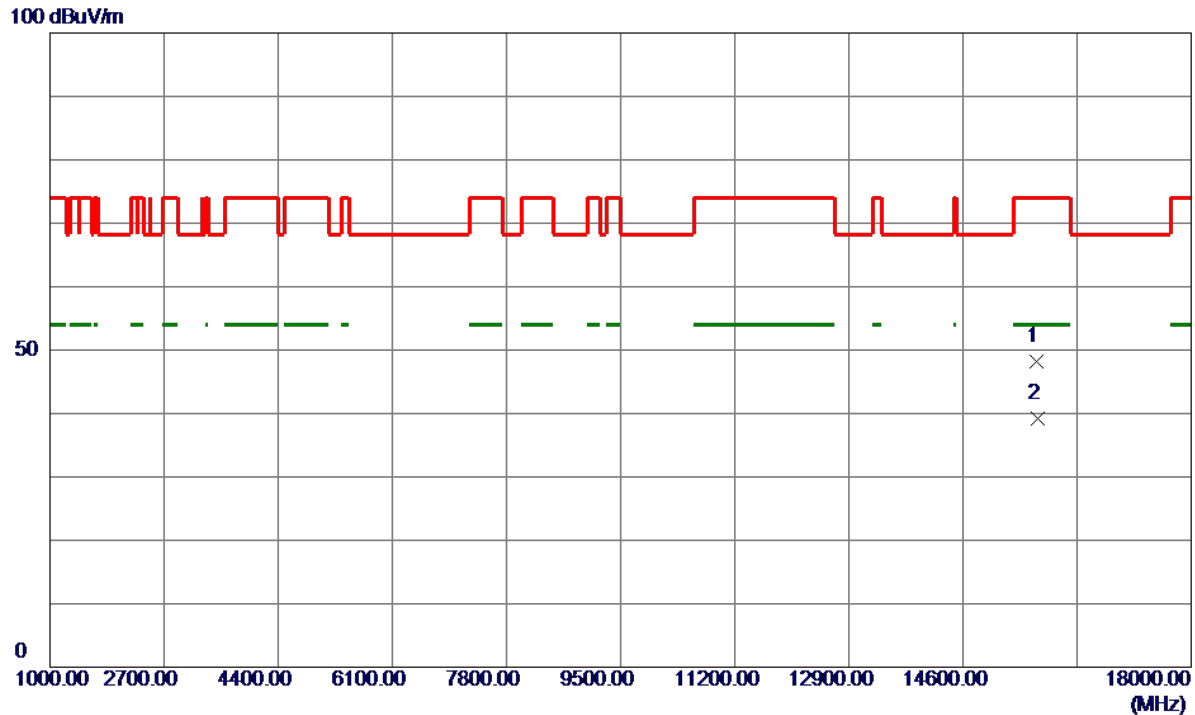


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15699.0500	35.51	12.76	48.27	74.00	-25.73	Peak	
2 *	15716.3500	26.37	12.78	39.15	54.00	-14.85	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

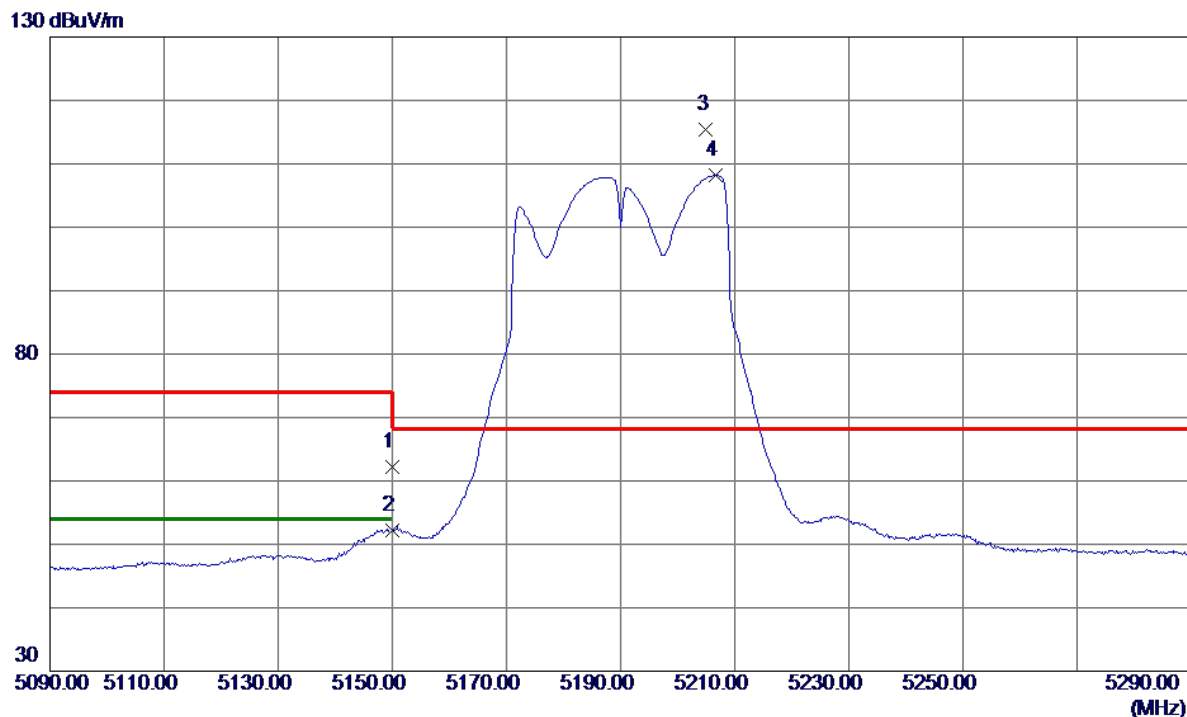


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	47.83	14.45	62.28	74.00	-11.72	Peak	
2	5150.0000	37.67	14.45	52.12	54.00	-1.88	AVG	
3 *	5205.0000	100.80	14.61	115.41	68.20	47.21	Peak	No Limit
4	5206.6000	93.61	14.61	108.22	999.00	-890.78	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

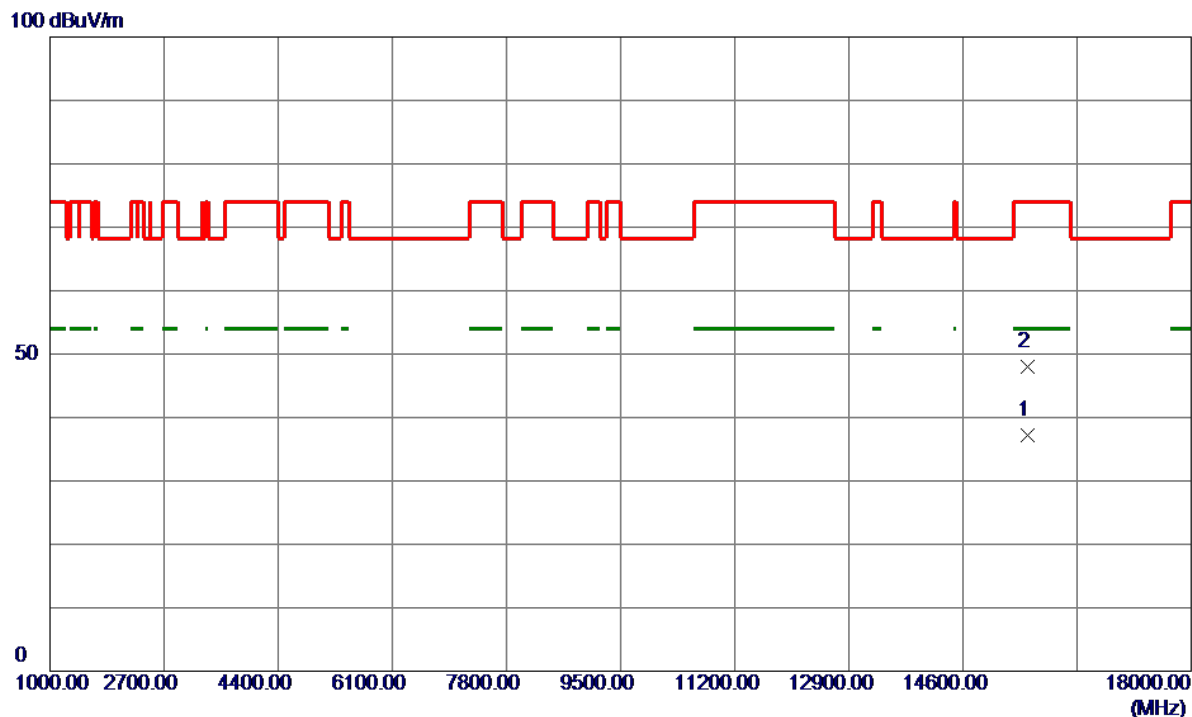


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15568.7200	24.55	12.66	37.21	54.00	-16.79	AVG	
2	15569.5950	35.26	12.66	47.92	74.00	-26.08	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

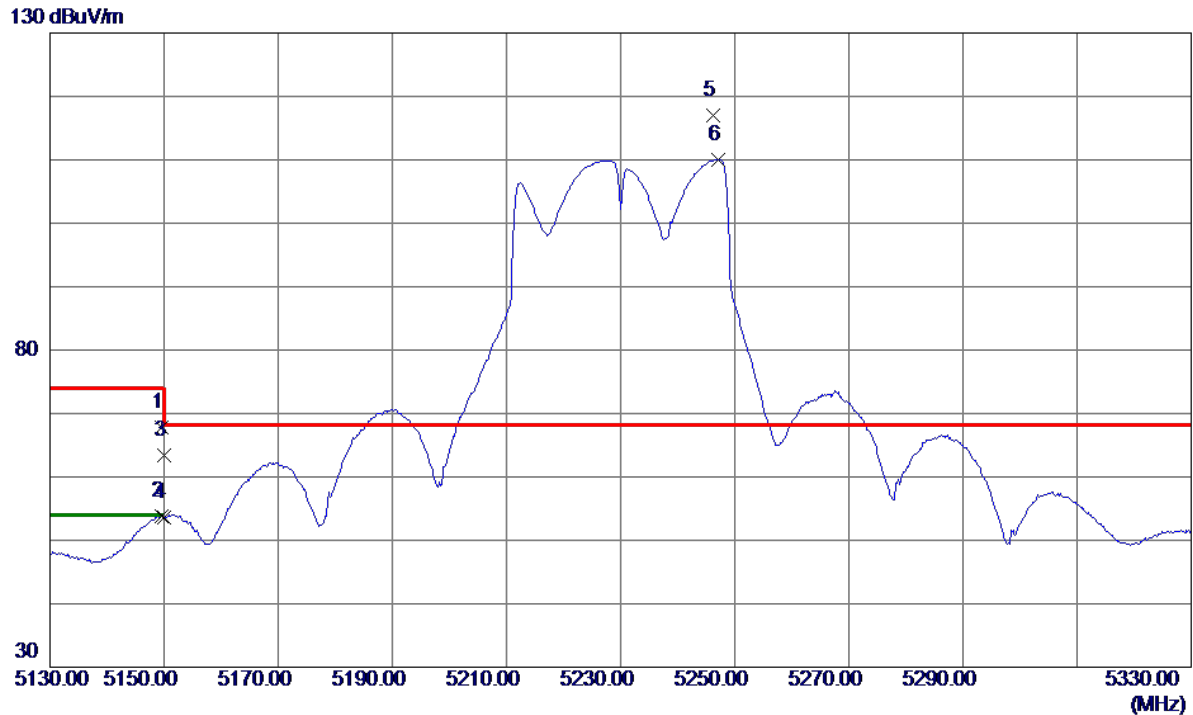


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.6000	53.32	14.45	67.77	74.00	-6.23	Peak	
2	5149.6000	39.33	14.45	53.78	54.00	-0.22	AVG	
3	5150.0000	48.94	14.45	63.39	74.00	-10.61	Peak	
4	5150.0000	39.11	14.45	53.56	54.00	-0.44	AVG	
5 *	5246.2000	102.33	14.73	117.06	68.20	48.86	Peak	No Limit
6	5247.2000	95.36	14.73	110.09	999.00	-888.91	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

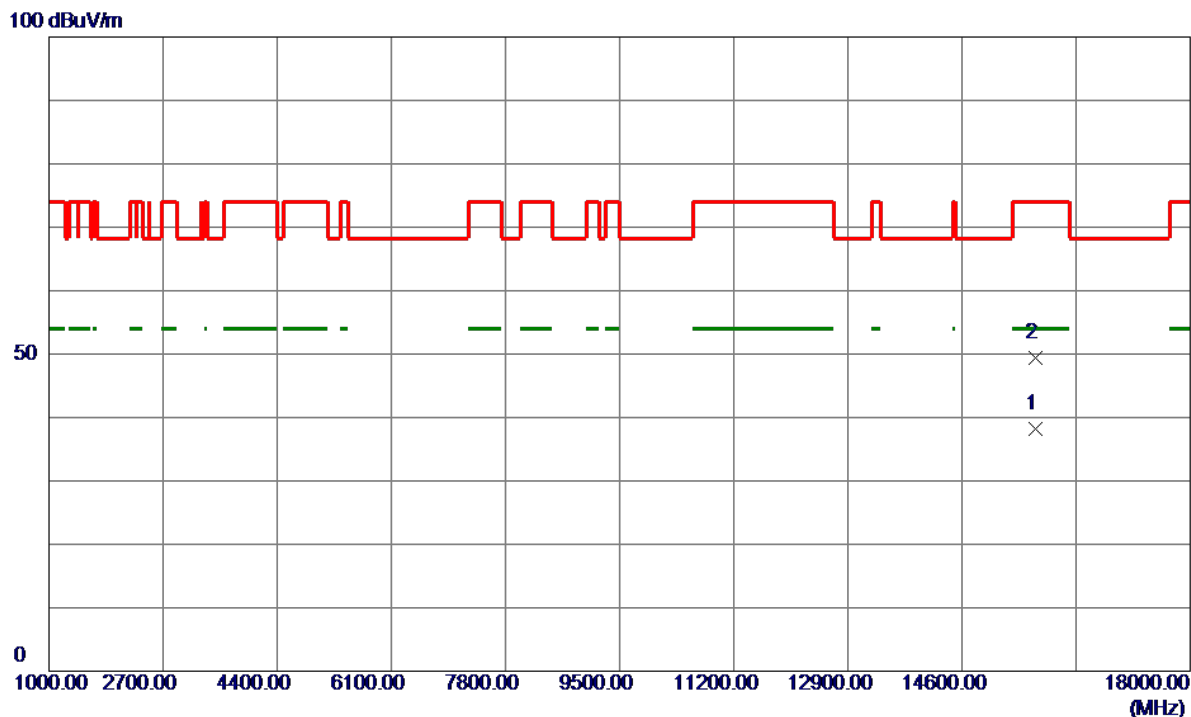


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15687.8600	25.49	12.75	38.24	54.00	-15.76	AVG	
2	15687.6300	36.56	12.75	49.31	74.00	-24.69	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

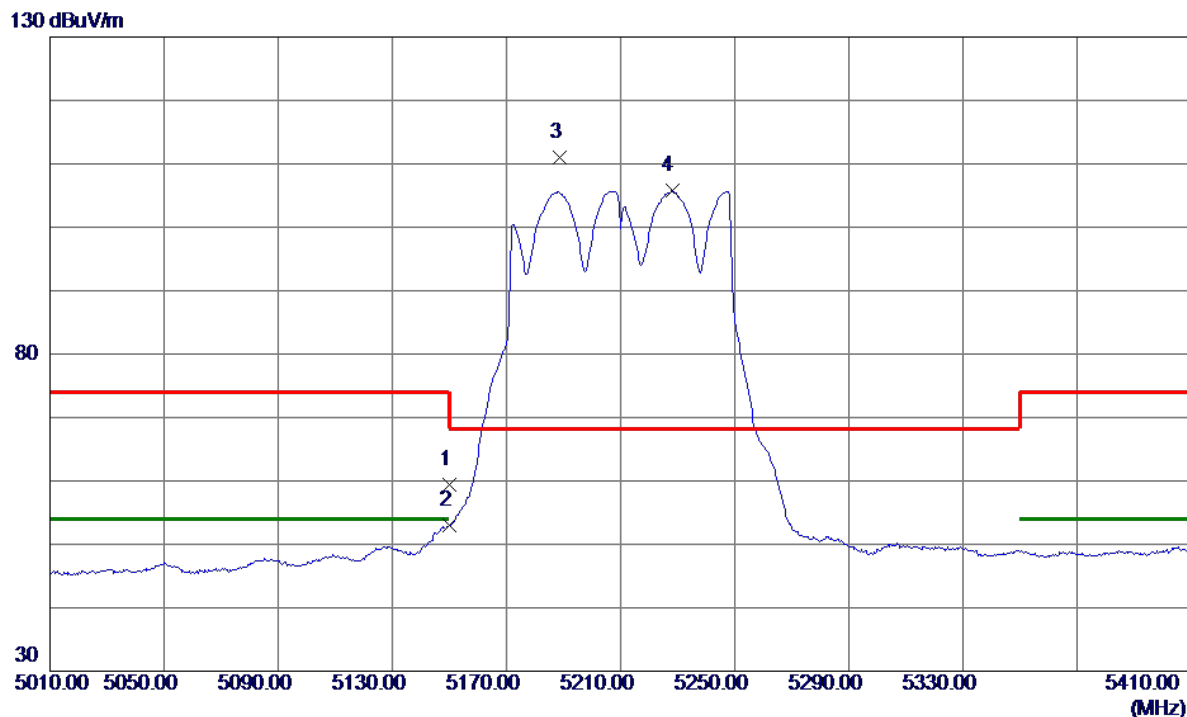


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	44.91	14.45	59.36	74.00	-14.64	Peak	
2	5150.0000	38.54	14.45	52.99	54.00	-1.01	AVG	
3 *	5188.8000	96.40	14.56	110.96	68.20	42.76	Peak	No Limit
4	5228.0000	91.05	14.67	105.72	999.00	-893.28	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

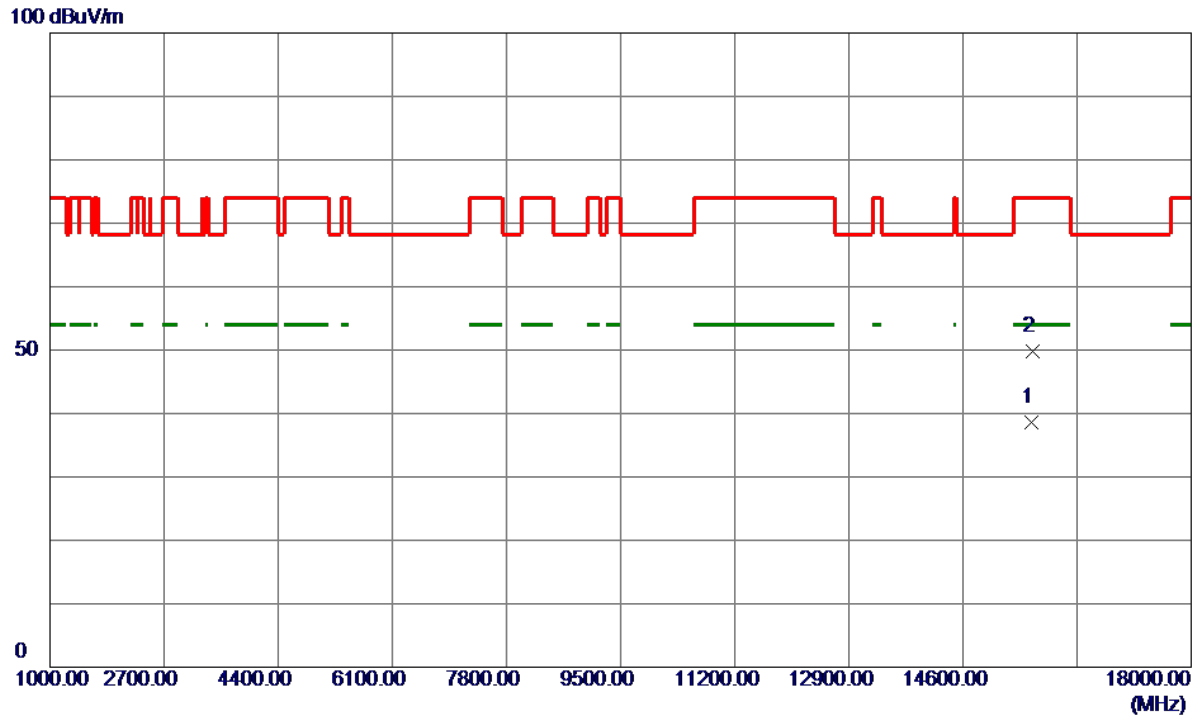


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15627.8900	25.88	12.71	38.59	54.00	-15.41	AVG	
2	15632.2500	37.09	12.71	49.80	74.00	-24.20	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

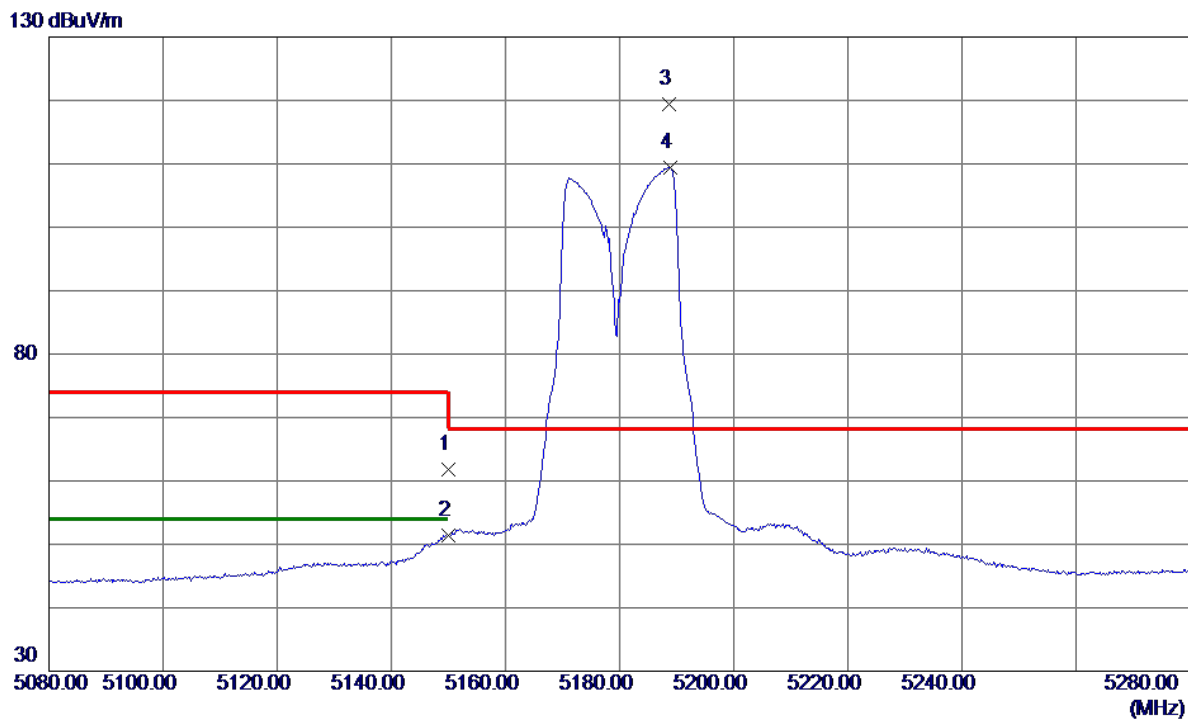


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	47.30	14.45	61.75	74.00	-12.25	Peak	
2	5150.0000	36.94	14.45	51.39	54.00	-2.61	AVG	
3 *	5188.6000	104.77	14.56	119.33	68.20	51.13	Peak	No Limit
4	5188.8000	94.87	14.56	109.43	999.00	-889.57	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

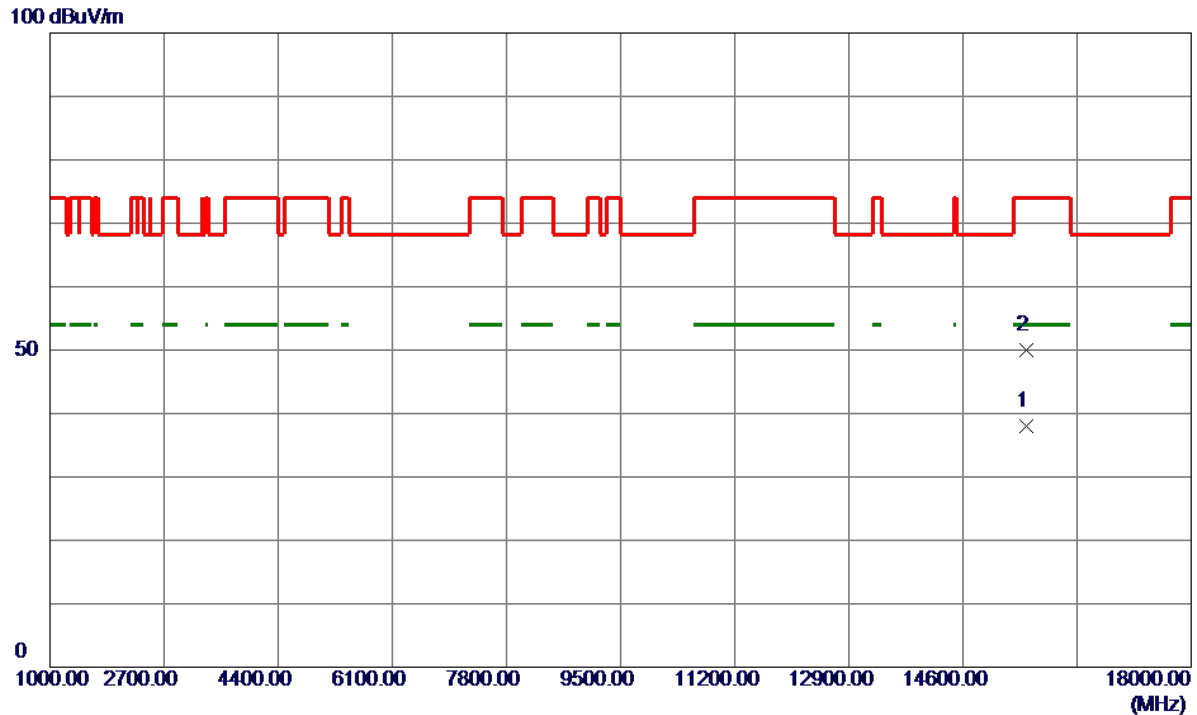


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15540.0000	25.45	12.64	38.09	54.00	-15.91	AVG	
2	15540.0000	37.33	12.64	49.97	74.00	-24.03	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

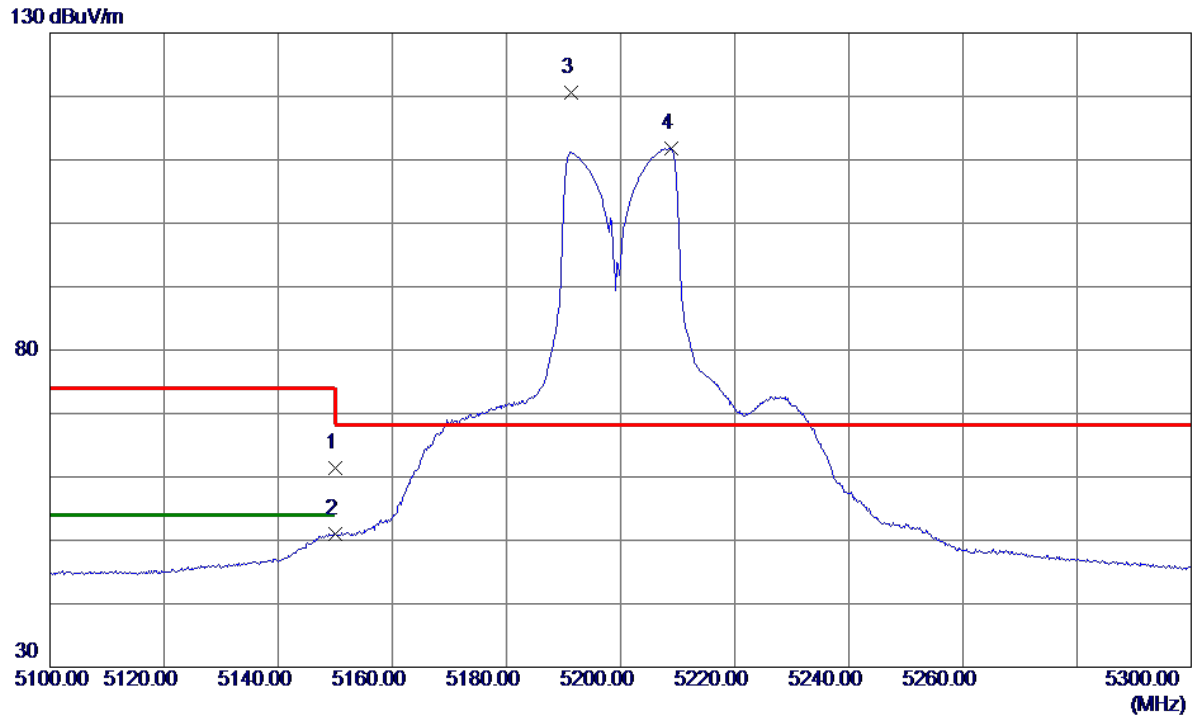


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	47.00	14.45	61.45	74.00	-12.55	Peak	
2	5150.0000	36.63	14.45	51.08	54.00	-2.92	AVG	
3 *	5191.4000	106.10	14.57	120.67	68.20	52.47	Peak	No Limit
4	5208.8000	97.23	14.62	111.85	999.00	-887.15	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

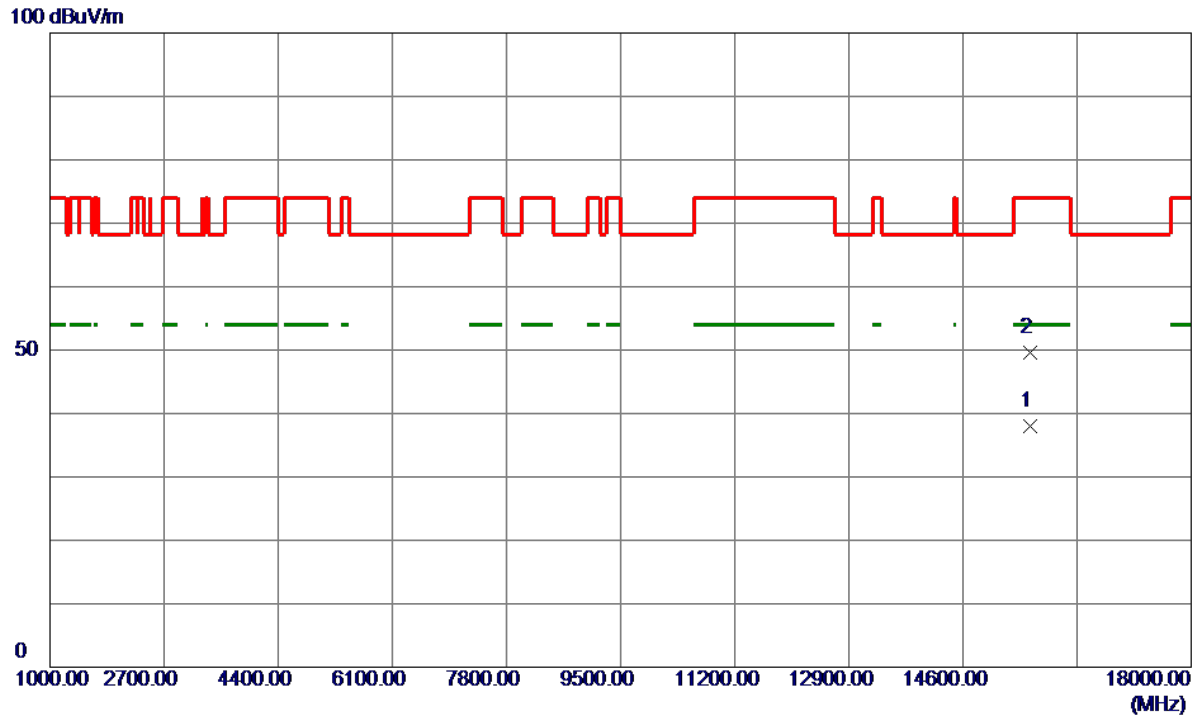


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15600.0000	25.34	12.68	38.02	54.00	-15.98	AVG	
2	15600.0000	36.88	12.68	49.56	74.00	-24.44	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5240 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

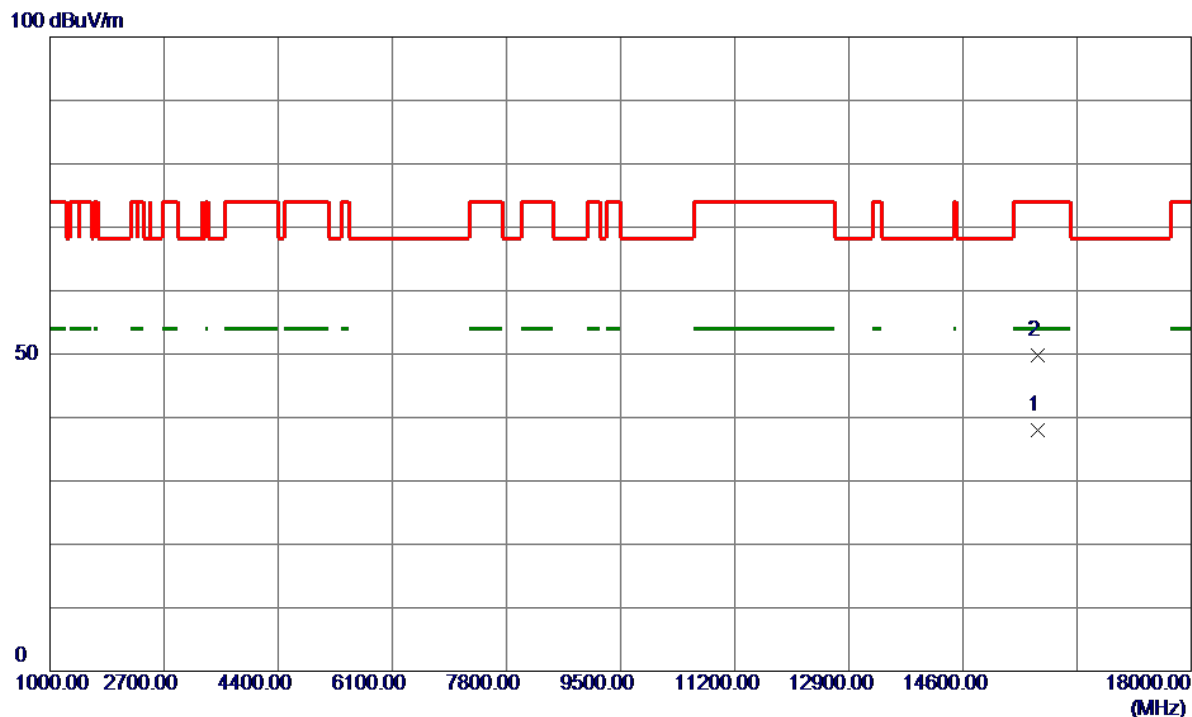


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15720.0000	25.25	12.78	38.03	54.00	-15.97	AVG	
2	15720.0000	37.00	12.78	49.78	74.00	-24.22	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

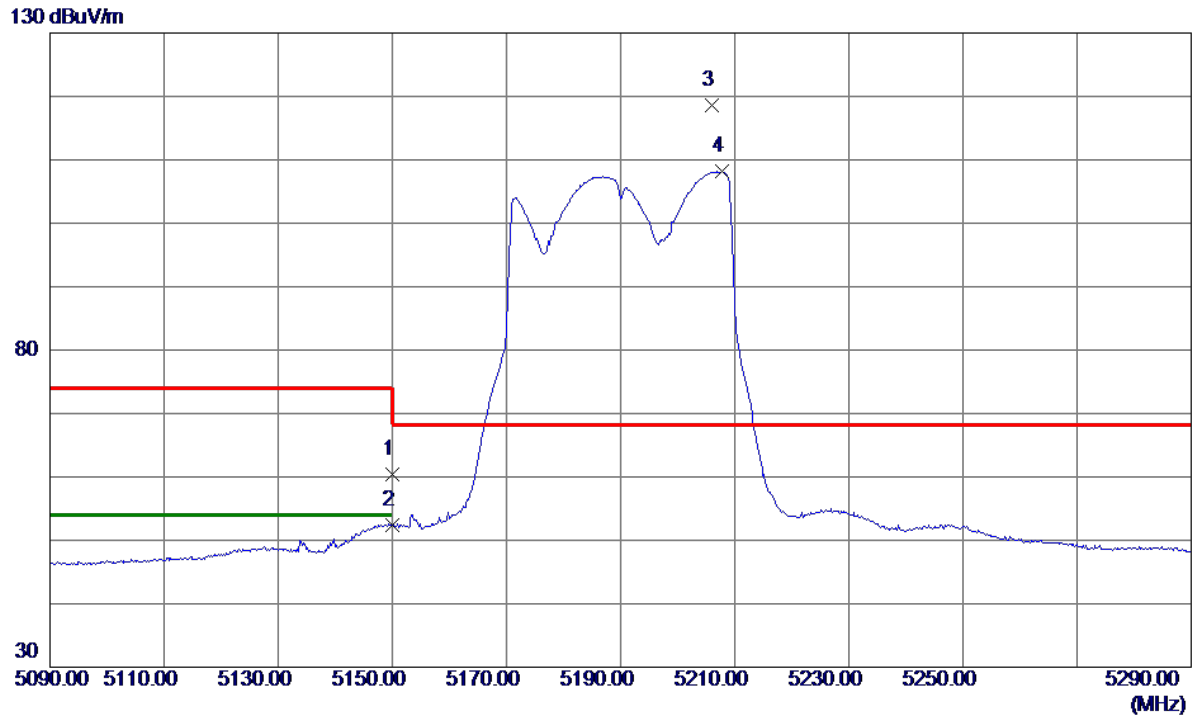


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	45.87	14.45	60.32	74.00	-13.68	Peak	
2	5150.0000	37.94	14.45	52.39	54.00	-1.61	AVG	
3 *	5206.0000	103.90	14.61	118.51	68.20	50.31	Peak	No Limit
4	5207.8000	93.49	14.62	108.11	999.00	-890.89	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

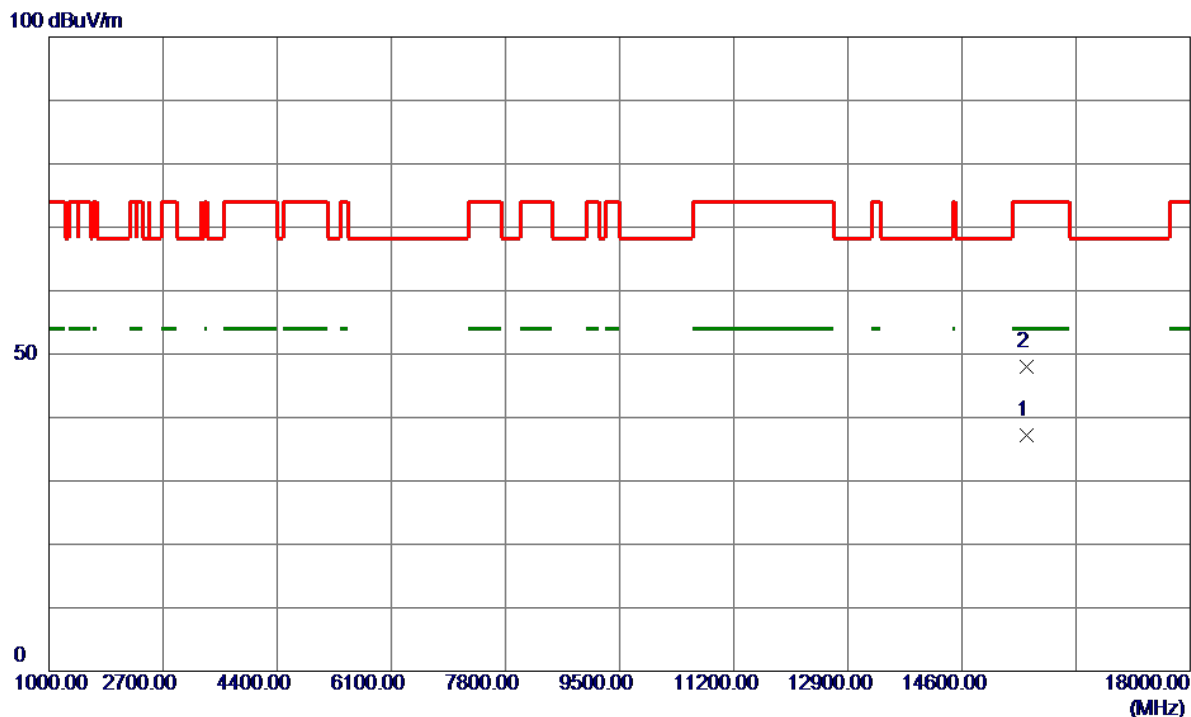


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15571.1950	24.59	12.66	37.25	54.00	-16.75	AVG	
2	15572.0650	35.26	12.66	47.92	74.00	-26.08	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

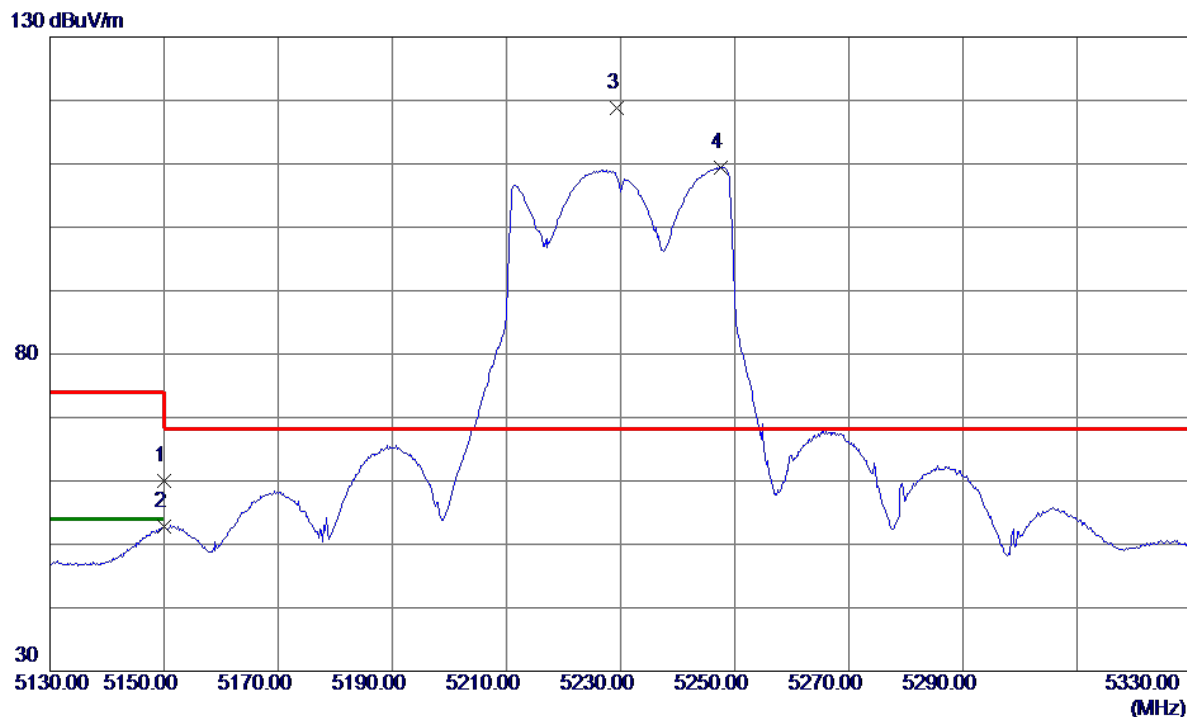


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	45.53	14.45	59.98	74.00	-14.02	Peak	
2	5150.0000	38.37	14.45	52.82	54.00	-1.18	AVG	
3 *	5229.4000	104.16	14.68	118.84	68.20	50.64	Peak	No Limit
4	5247.6000	94.66	14.73	109.39	999.00	-889.61	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

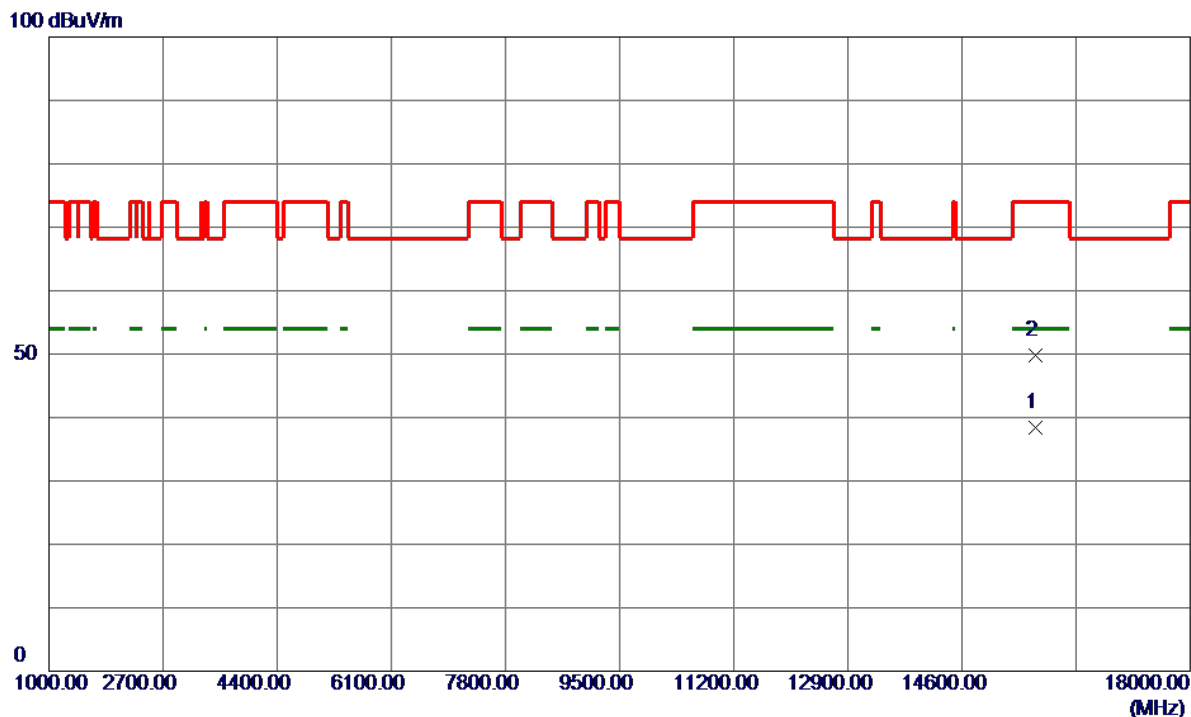


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15689.3500	25.56	12.75	38.31	54.00	-15.69	AVG	
2	15689.7000	36.97	12.75	49.72	74.00	-24.28	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

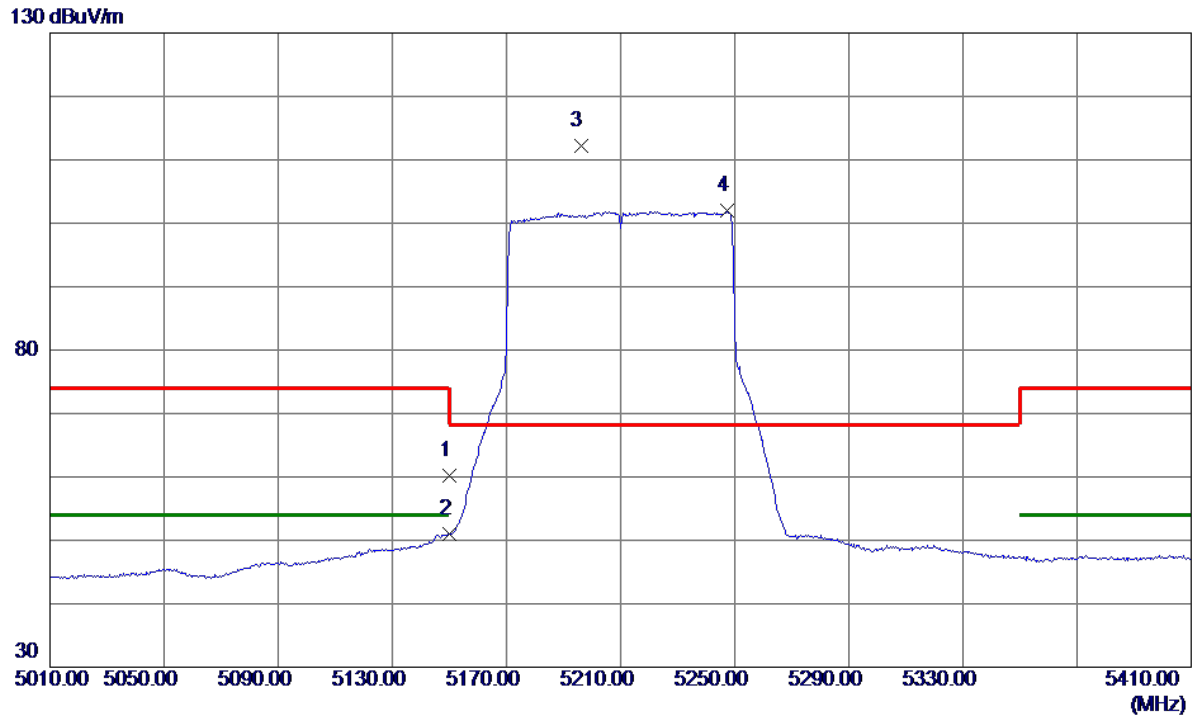


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	45.66	14.45	60.11	74.00	-13.89	Peak	
2	5150.0000	36.62	14.45	51.07	54.00	-2.93	AVG	
3 *	5196.0000	97.58	14.58	112.16	68.20	43.96	Peak	No Limit
4	5247.2000	87.20	14.73	101.93	999.00	-897.07	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

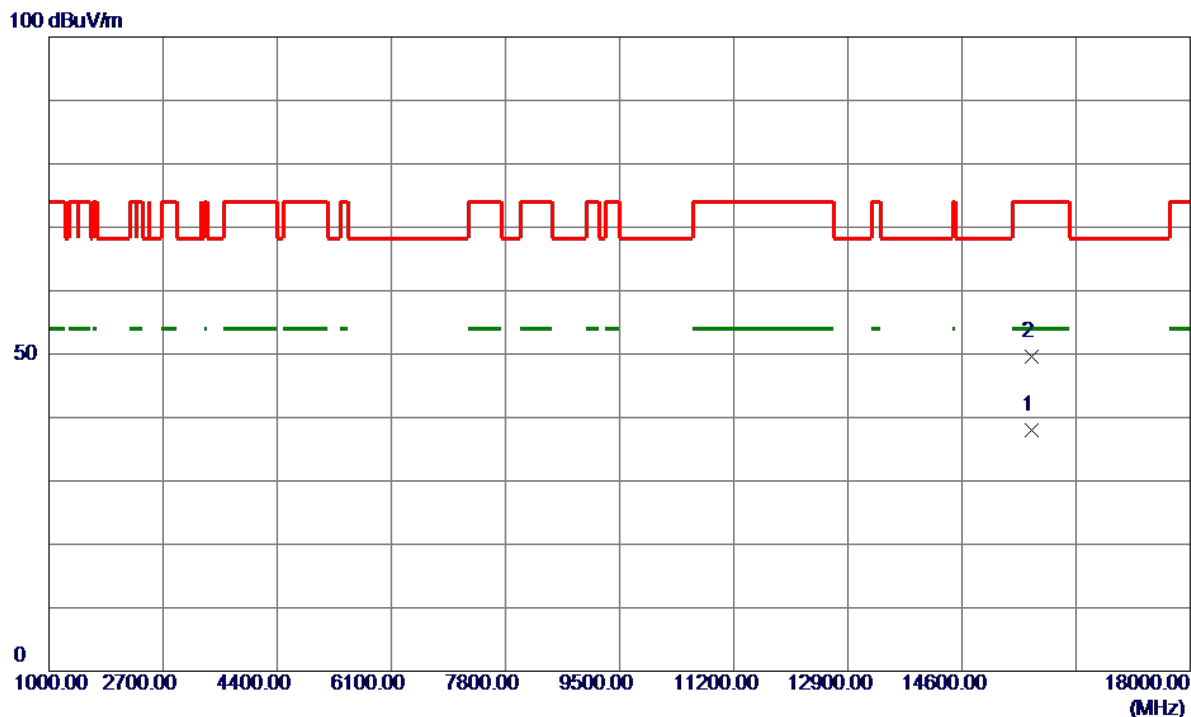


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15630.0000	25.35	12.71	38.06	54.00	-15.94	AVG	
2	15630.0000	36.92	12.71	49.63	74.00	-24.37	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

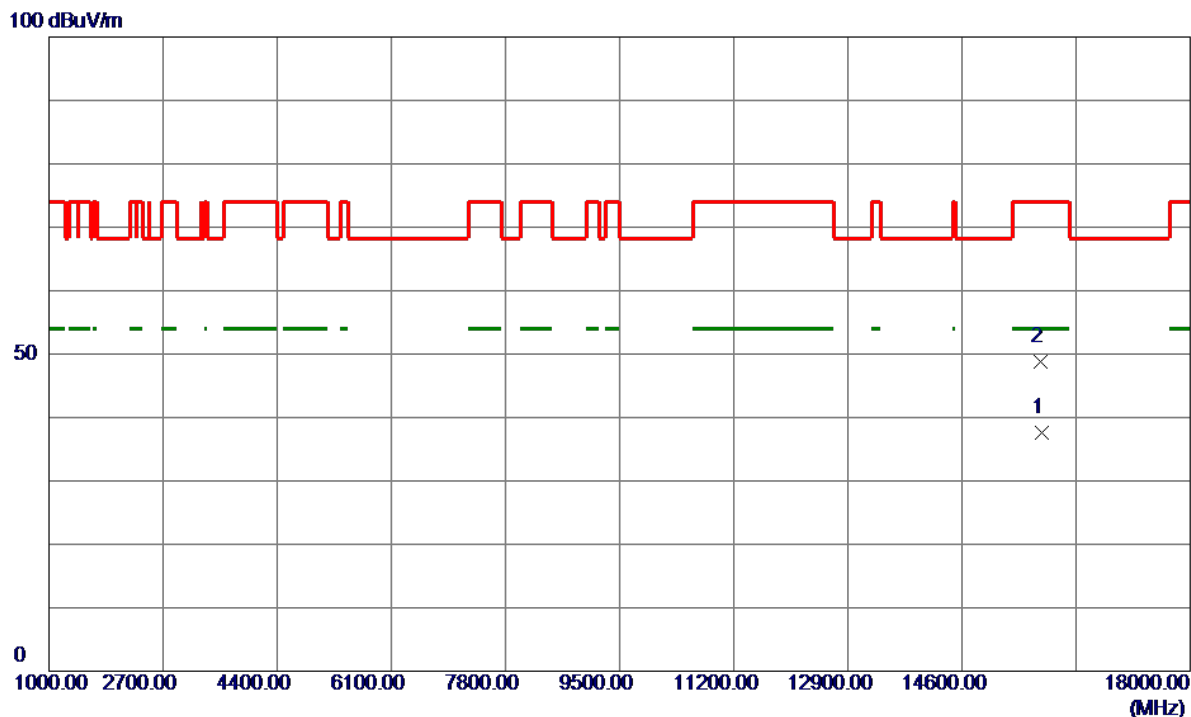


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15783.4000	24.68	12.83	37.51	54.00	-16.49	AVG	
2	15779.6500	35.99	12.83	48.82	74.00	-25.18	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

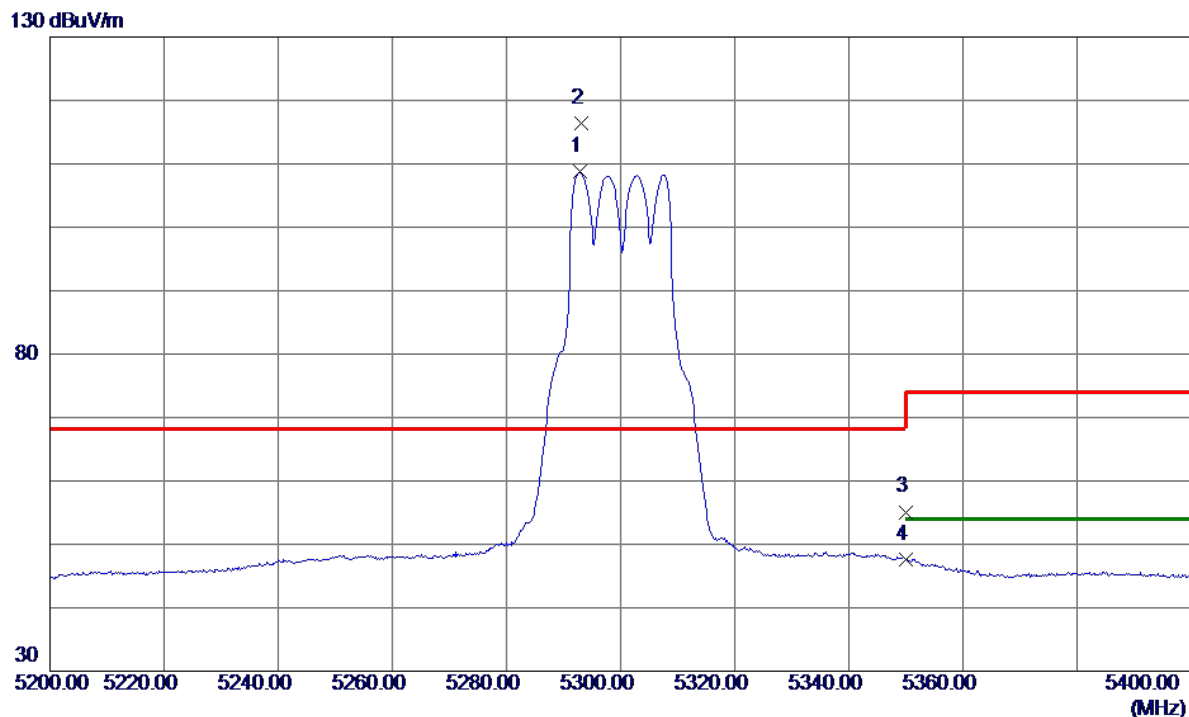


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5292.8000	93.97	14.86	108.83	999.00	-890.17	AVG	No Limit
2 *	5293.2000	101.49	14.86	116.35	68.20	48.15	Peak	No Limit
3	5350.0000	40.08	15.02	55.10	74.00	-18.90	Peak	
4	5350.0000	32.66	15.02	47.68	54.00	-6.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

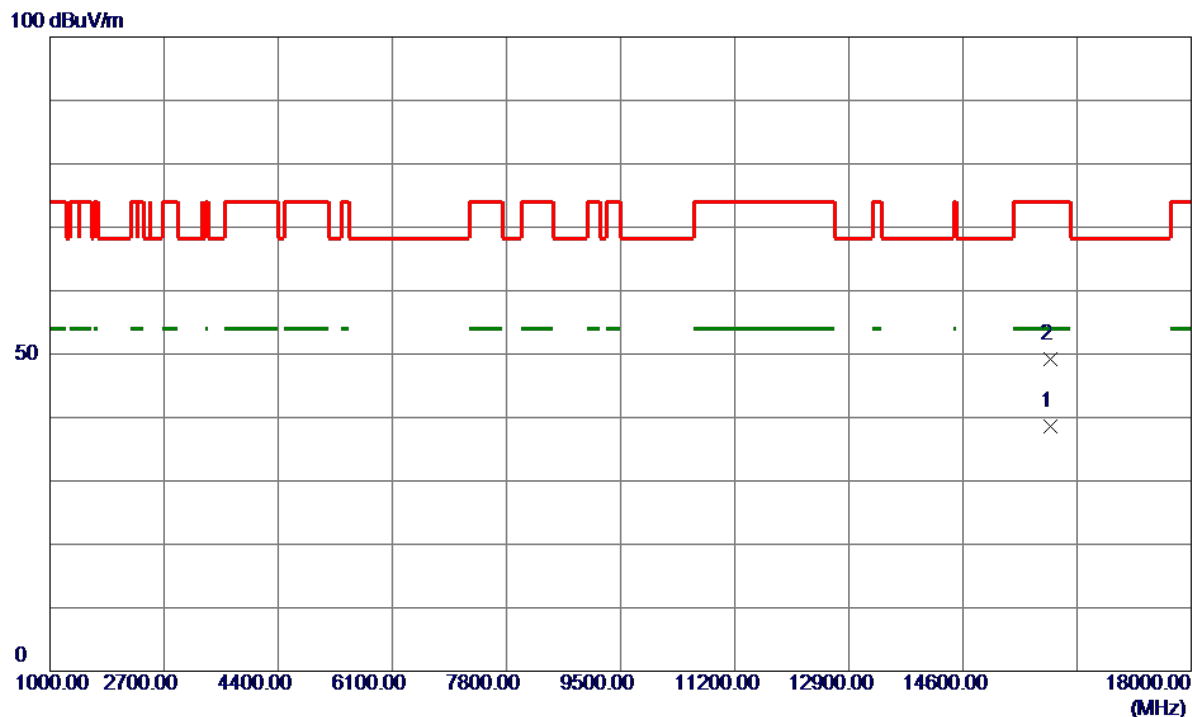


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15904.6200	25.72	12.92	38.64	54.00	-15.36	AVG	
2	15901.1900	36.24	12.92	49.16	74.00	-24.84	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

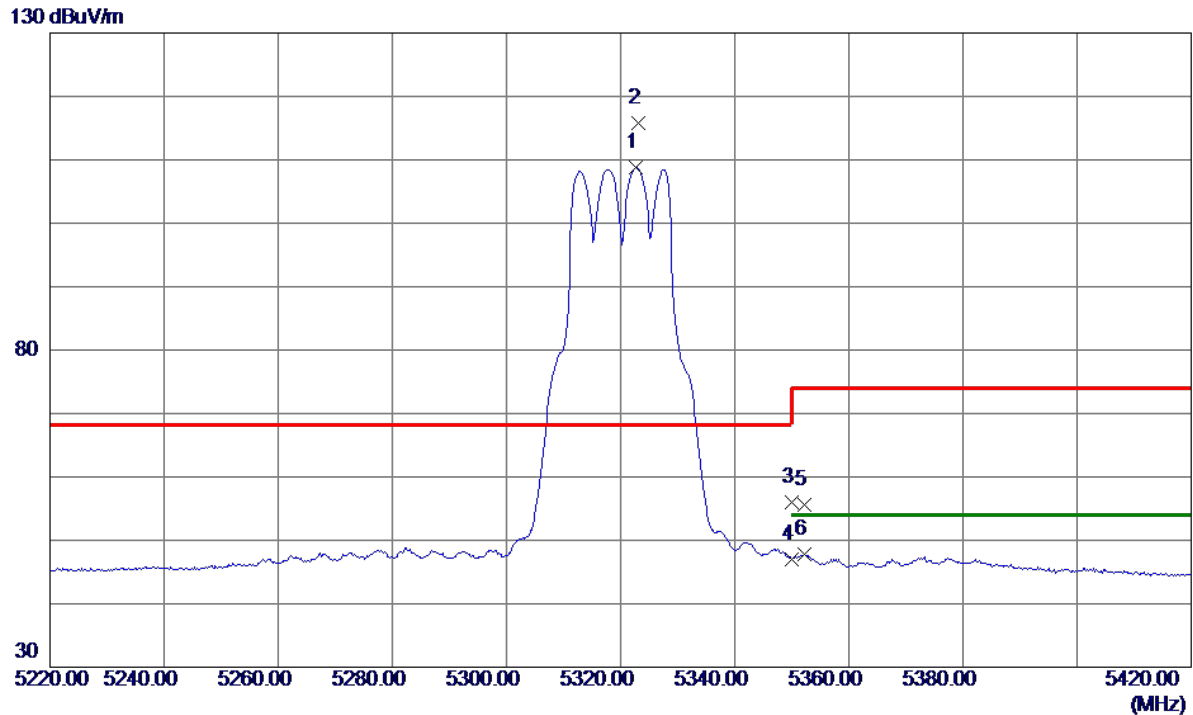


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5322.6000	93.83	14.95	108.78	999.00	-890.22	AVG	No Limit
2 *	5323.2000	100.80	14.95	115.75	68.20	47.55	Peak	No Limit
3	5350.0000	41.04	15.02	56.06	74.00	-17.94	Peak	
4	5350.0000	32.03	15.02	47.05	54.00	-6.95	AVG	
5	5352.2000	40.54	15.03	55.57	74.00	-18.43	Peak	
6	5352.2000	32.84	15.03	47.87	54.00	-6.13	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

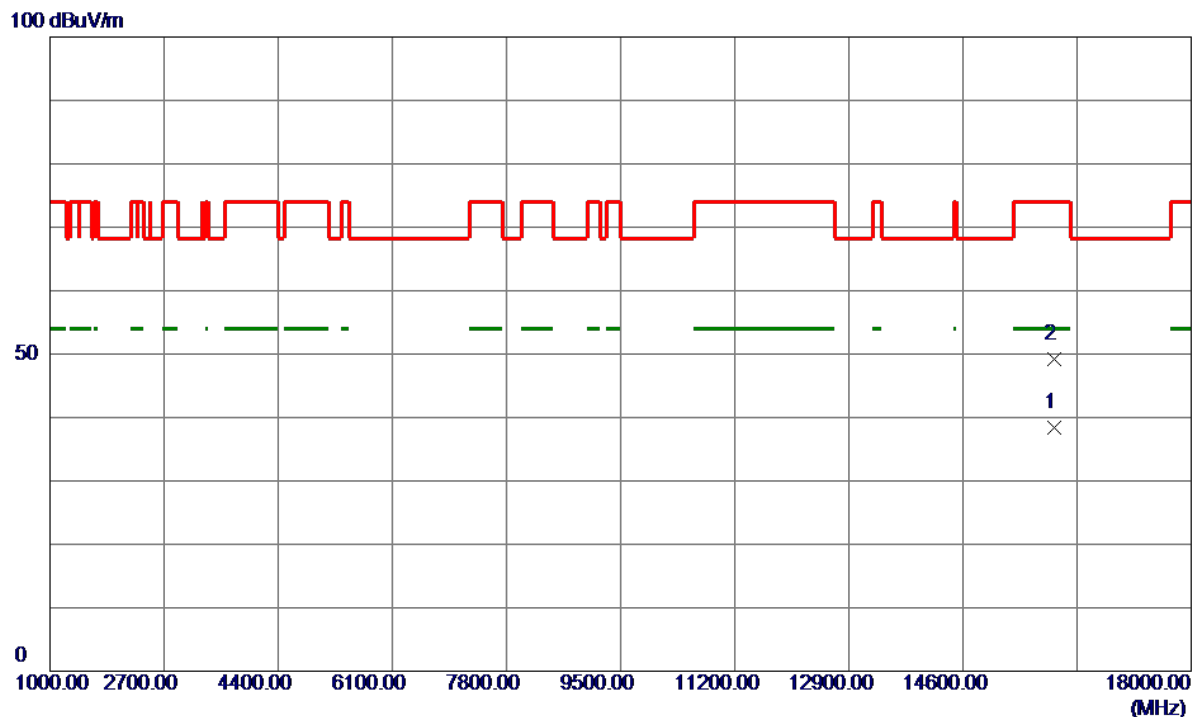


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15959.2700	25.44	12.97	38.41	54.00	-15.59	AVG	
2	15963.8600	36.29	12.97	49.26	74.00	-24.74	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5260 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

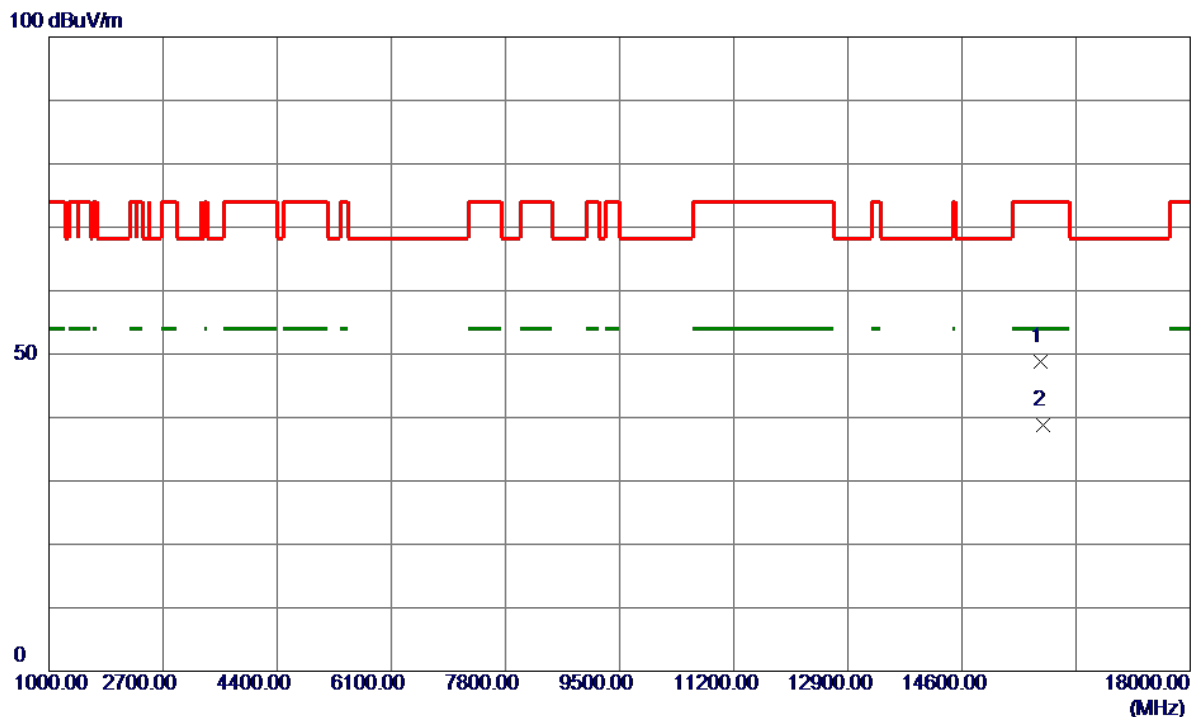


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15777.3000	36.02	12.82	48.84	74.00	-25.16	Peak	
2 *	15800.9000	25.96	12.84	38.80	54.00	-15.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

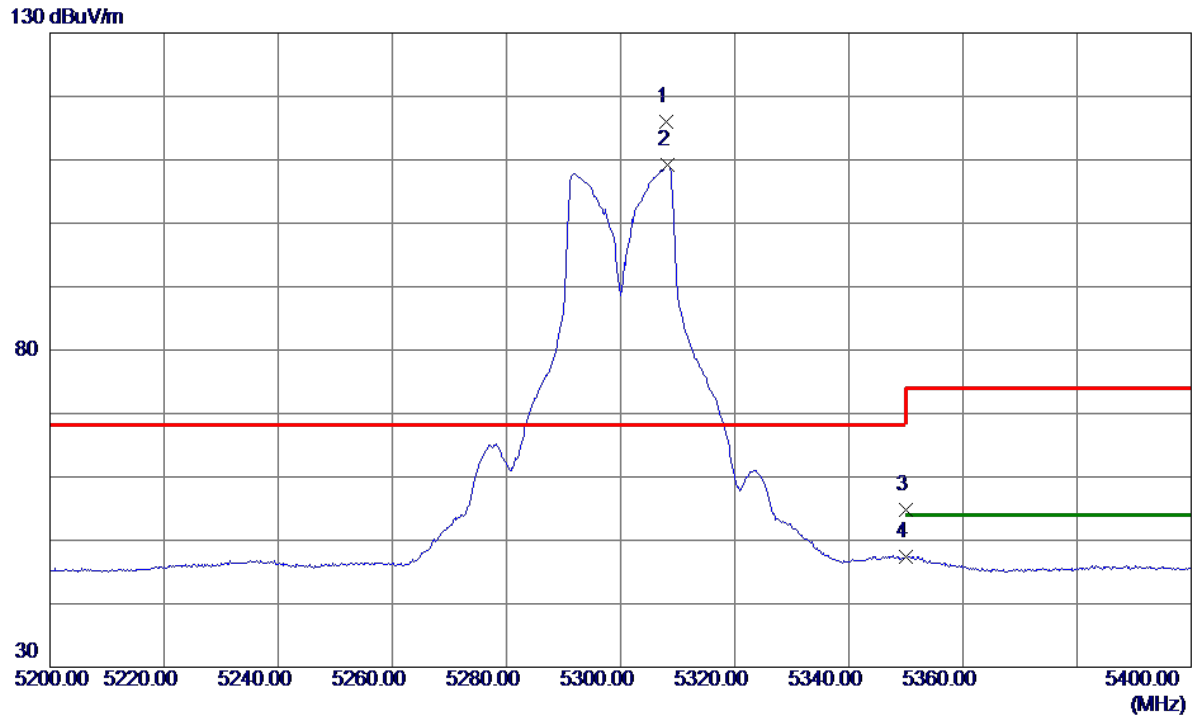


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5308.0000	101.01	14.90	115.91	68.20	47.71	Peak	No Limit
2	5308.2000	94.28	14.90	109.18	999.00	-889.82	AVG	No Limit
3	5350.0000	39.87	15.02	54.89	74.00	-19.11	Peak	
4	5350.0000	32.31	15.02	47.33	54.00	-6.67	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

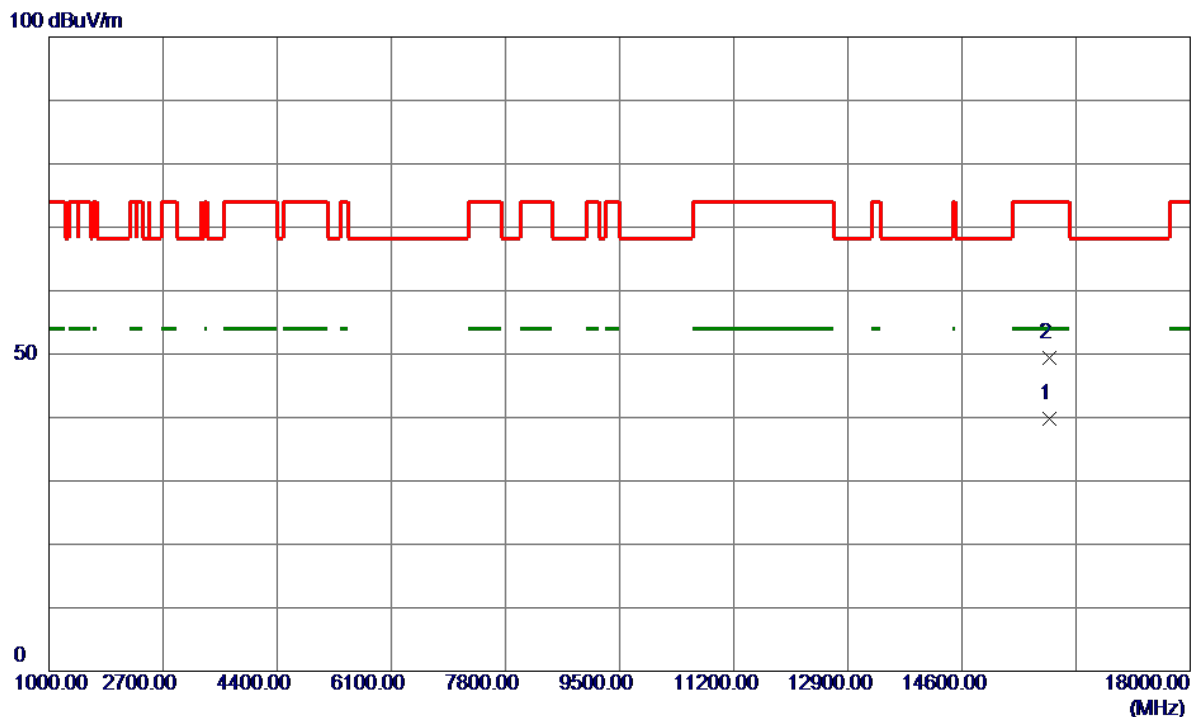


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15906.9500	26.91	12.93	39.84	54.00	-14.16	AVG	
2	15911.3000	36.51	12.93	49.44	74.00	-24.56	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

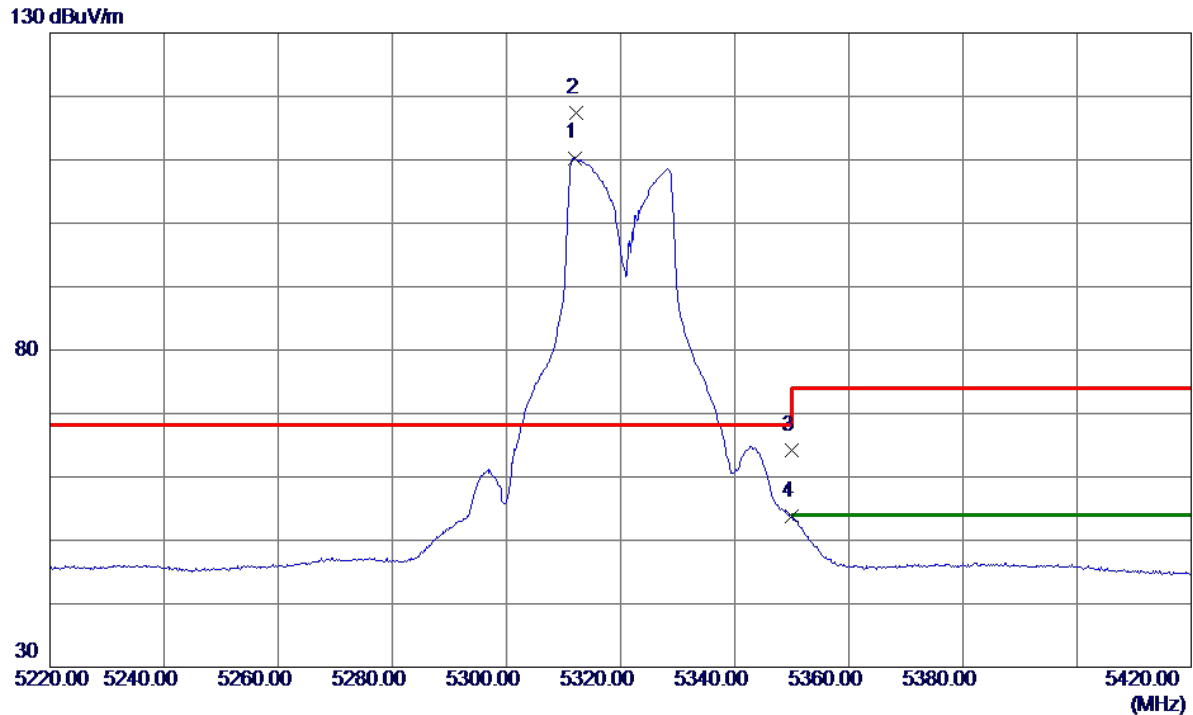


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5312.0000	95.38	14.92	110.30	999.00	-888.70	AVG	No Limit
2 *	5312.2000	102.54	14.92	117.46	68.20	49.26	Peak	No Limit
3	5350.0000	49.12	15.02	64.14	74.00	-9.86	Peak	
4	5350.0000	38.70	15.02	53.72	54.00	-0.28	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

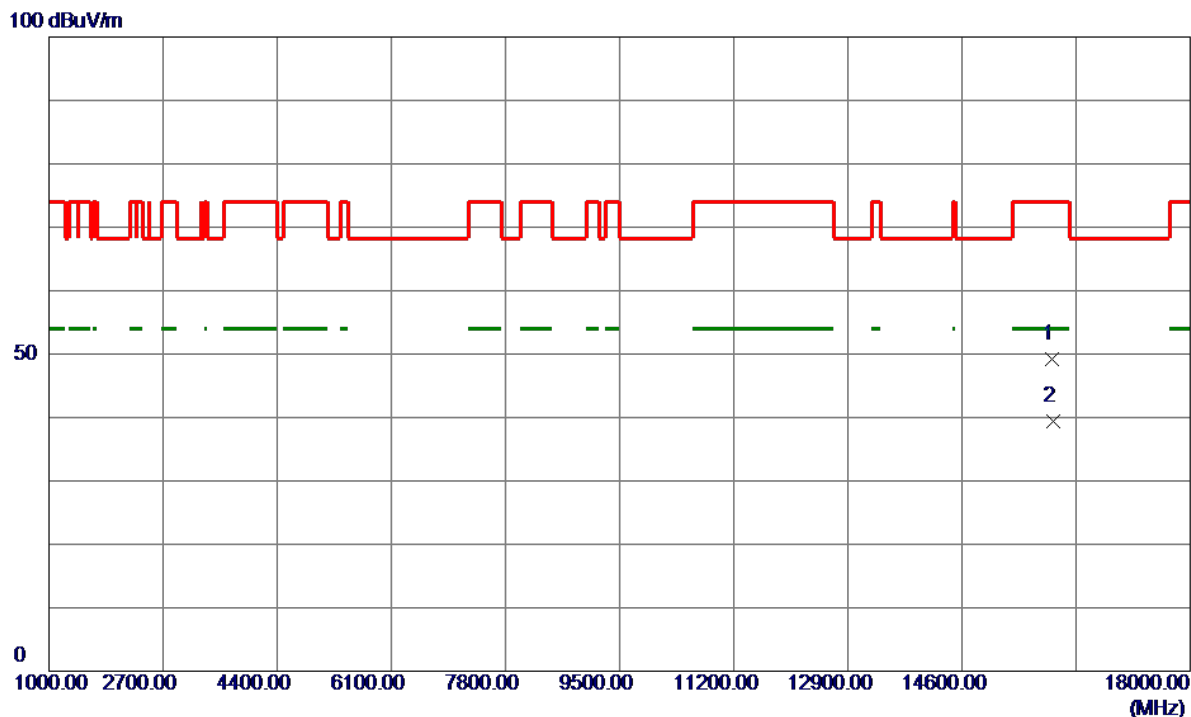


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15949.7000	36.19	12.96	49.15	74.00	-24.85	Peak	
2 *	15952.9000	26.48	12.96	39.44	54.00	-14.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

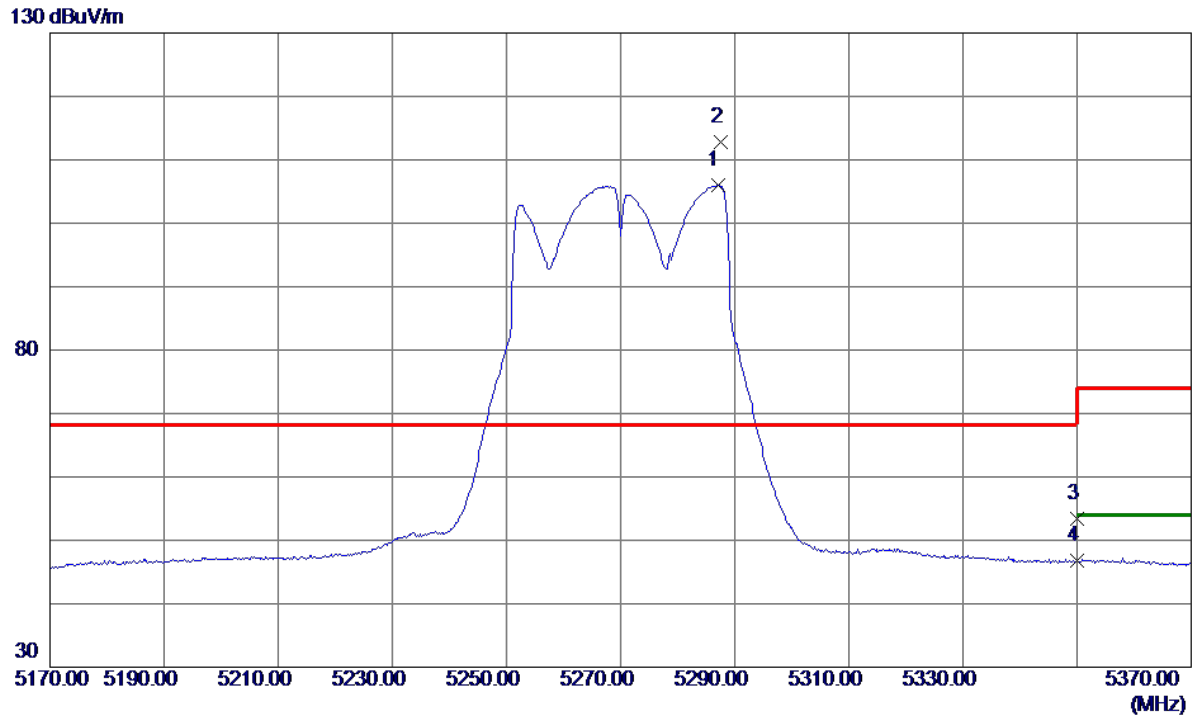


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5287.0000	91.11	14.84	105.95	999.00	-893.05	AVG	No Limit
2 *	5287.6000	97.98	14.85	112.83	68.20	44.63	Peak	No Limit
3	5350.0000	38.43	15.02	53.45	74.00	-20.55	Peak	
4	5350.0000	31.73	15.02	46.75	54.00	-7.25	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

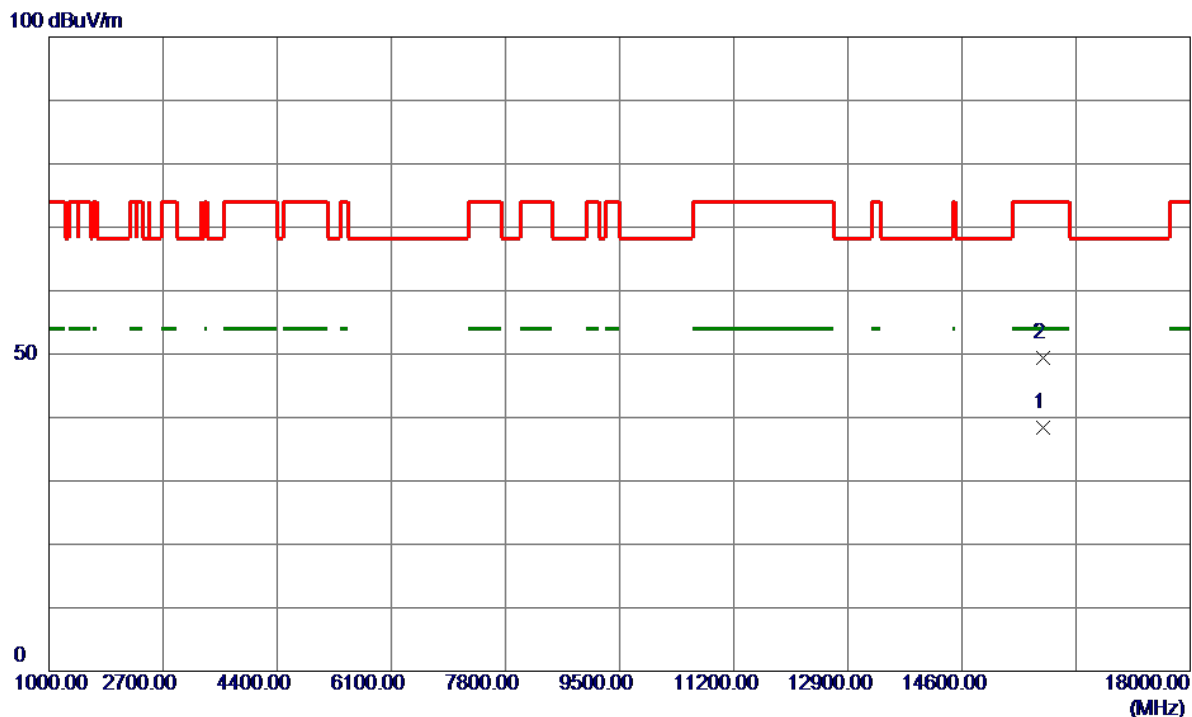


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15808.7400	25.61	12.85	38.46	54.00	-15.54	AVG	
2	15811.3050	36.61	12.85	49.46	74.00	-24.54	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

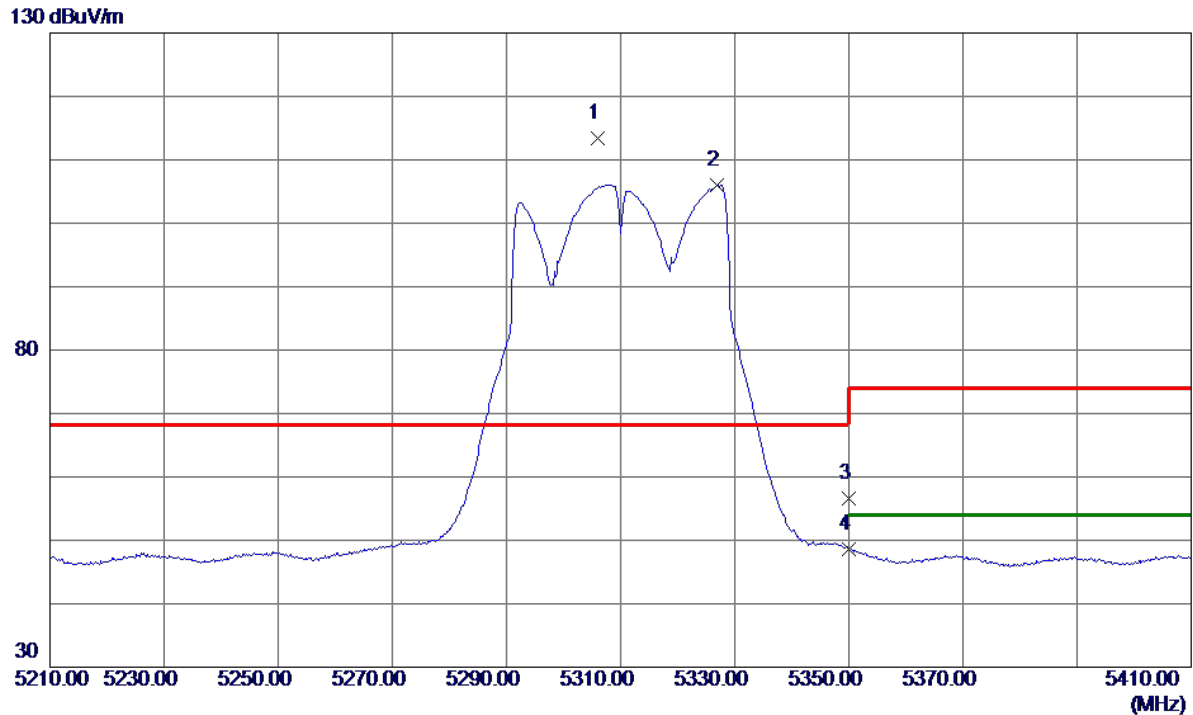


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5306.0000	98.55	14.90	113.45	68.20	45.25	Peak	No Limit
2	5326.8000	91.07	14.96	106.03	999.00	-892.97	AVG	No Limit
3	5350.0000	41.49	15.02	56.51	74.00	-17.49	Peak	
4	5350.0000	33.55	15.02	48.57	54.00	-5.43	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

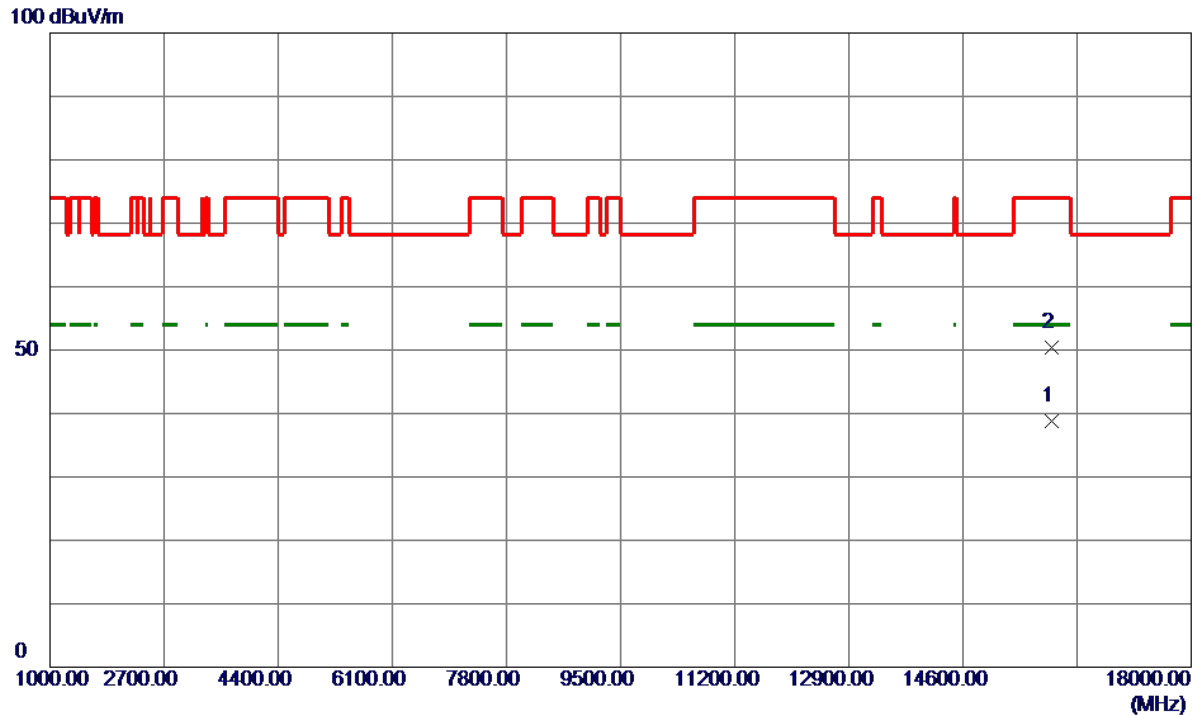


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15927.7850	25.90	12.94	38.84	54.00	-15.16	AVG	
2	15928.4300	37.50	12.94	50.44	74.00	-23.56	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

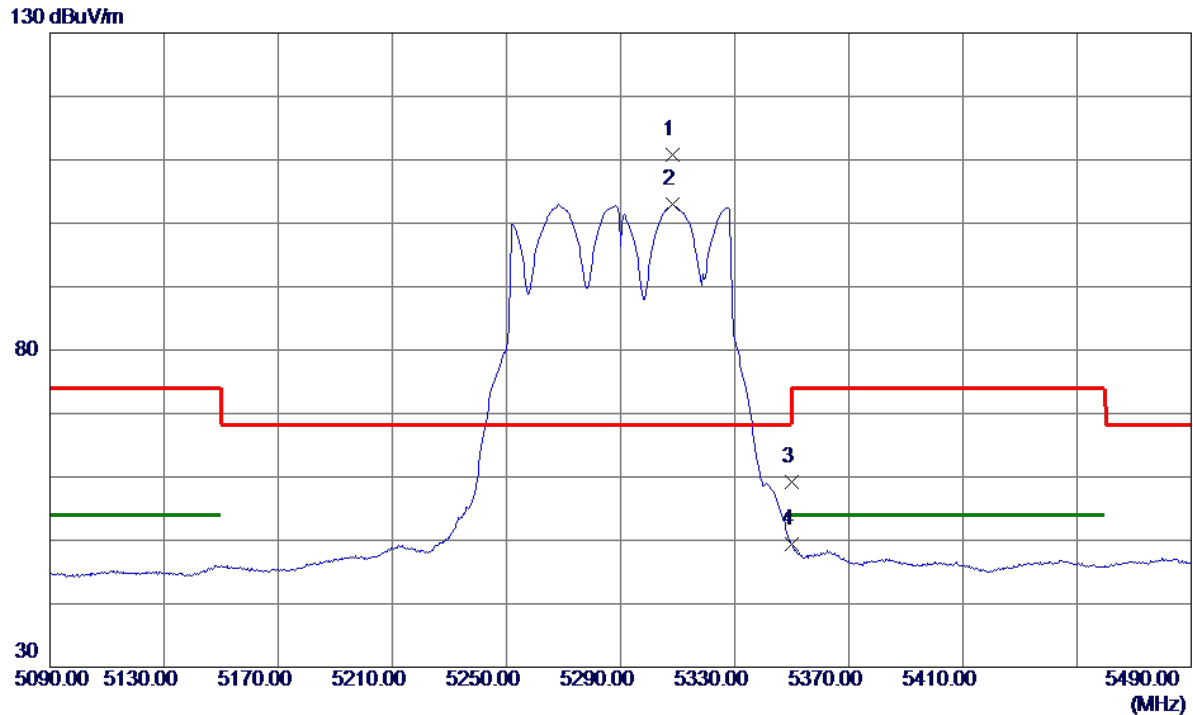


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5308.4000	95.87	14.90	110.77	68.20	42.57	Peak	No Limit
2	5308.4000	88.04	14.90	102.94	999.00	-896.06	AVG	No Limit
3	5350.0000	44.16	15.02	59.18	74.00	-14.82	Peak	
4	5350.0000	34.29	15.02	49.31	54.00	-4.69	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

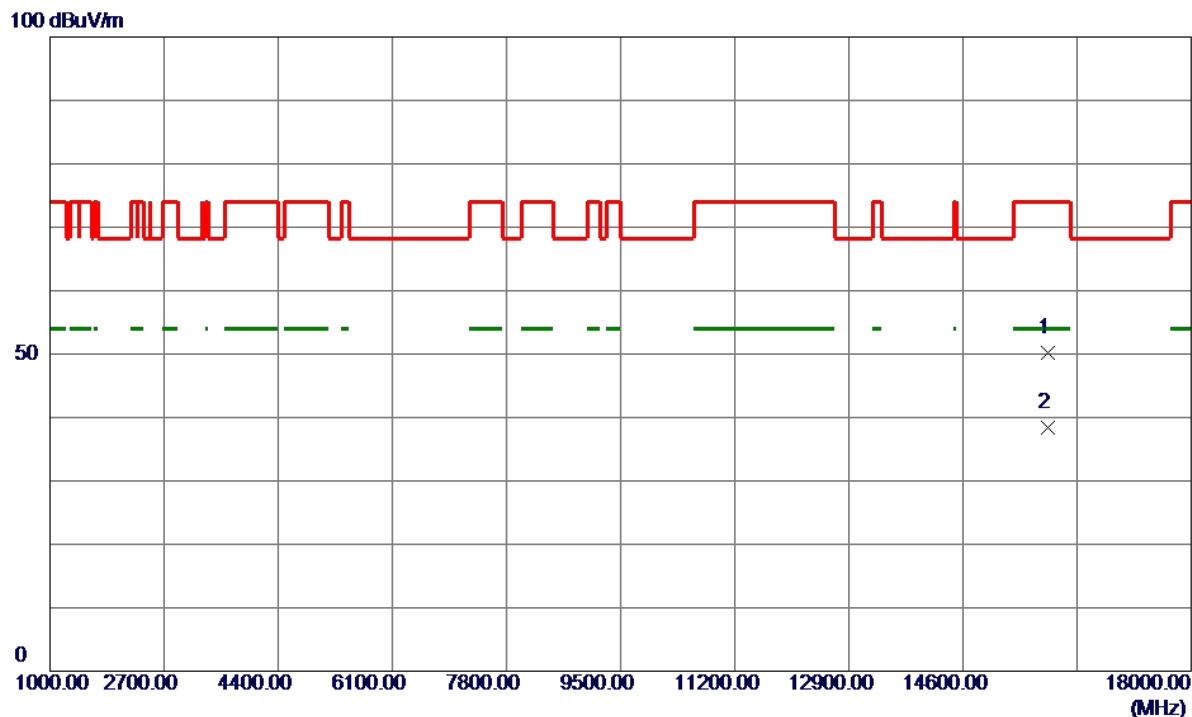


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15870.0000	37.37	12.90	50.27	74.00	-23.73	Peak	
2 *	15870.0000	25.48	12.90	38.38	54.00	-15.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT20) Mode 5260 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

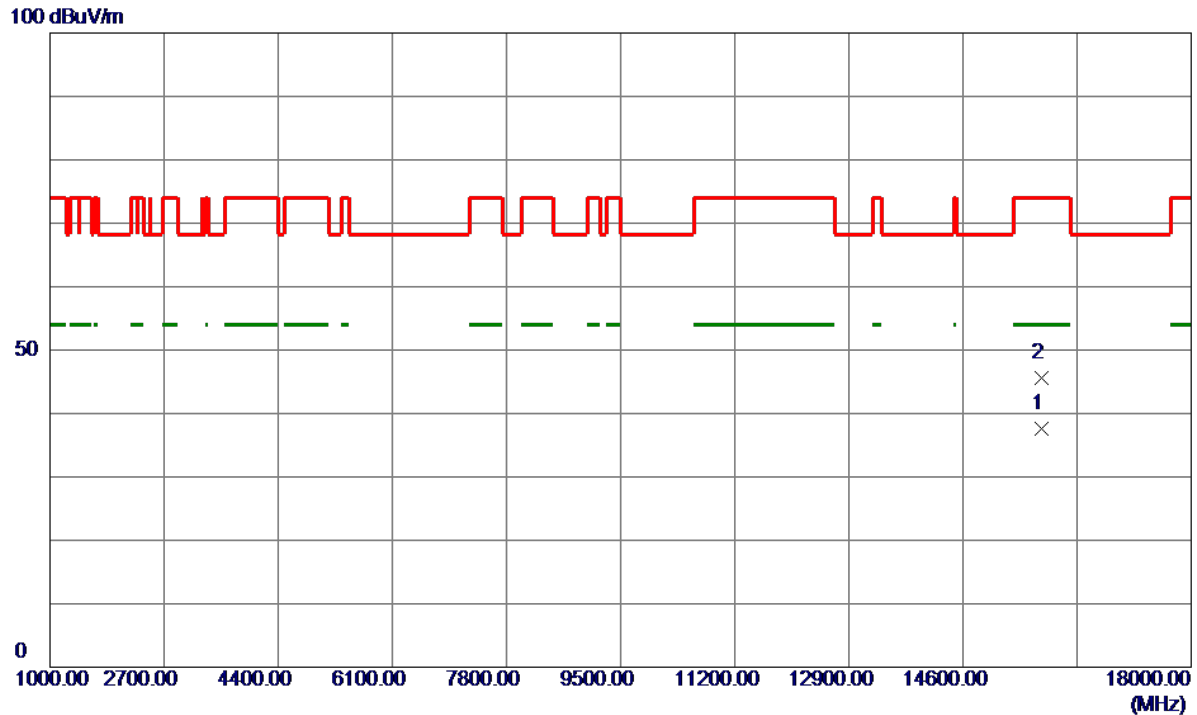


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15780.0000	24.68	12.83	37.51	54.00	-16.49	AVG	
2	15780.0000	32.76	12.83	45.59	74.00	-28.41	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT20) Mode 5300 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

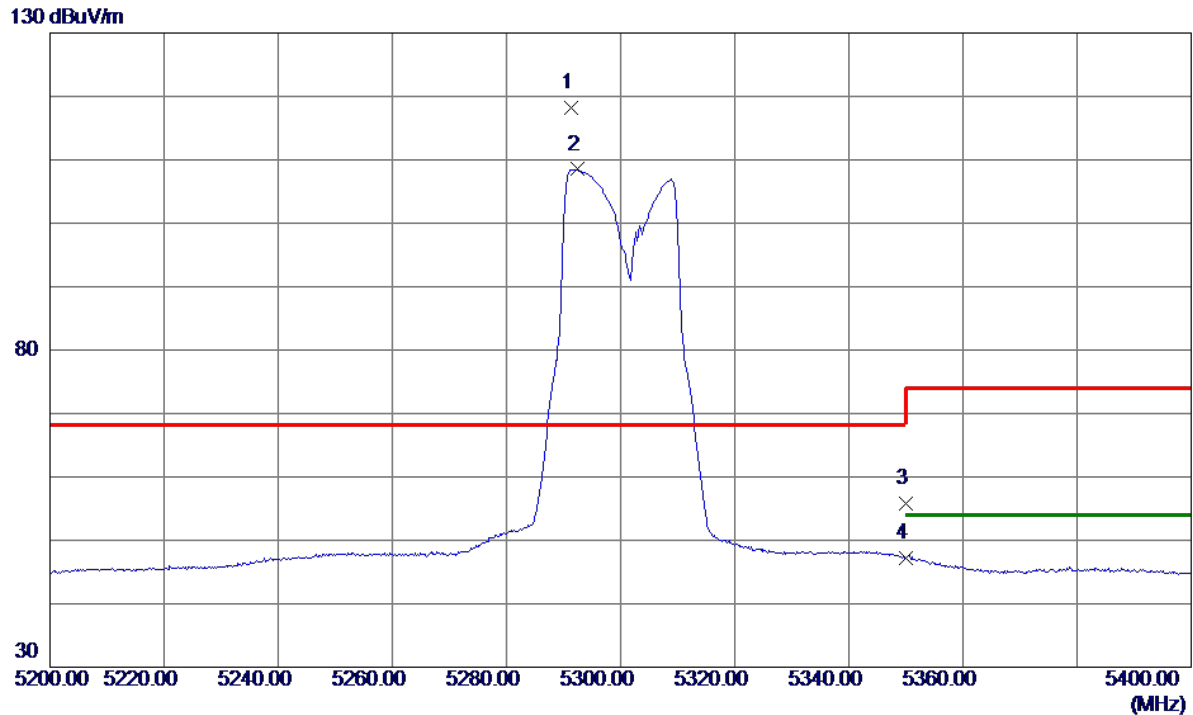


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5291.4000	103.40	14.86	118.26	68.20	50.06	Peak	No Limit
2	5292.4000	93.64	14.86	108.50	999.00	-890.50	AVG	No Limit
3	5350.0000	40.70	15.02	55.72	74.00	-18.28	Peak	
4	5350.0000	32.21	15.02	47.23	54.00	-6.77	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT20) Mode 5300 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

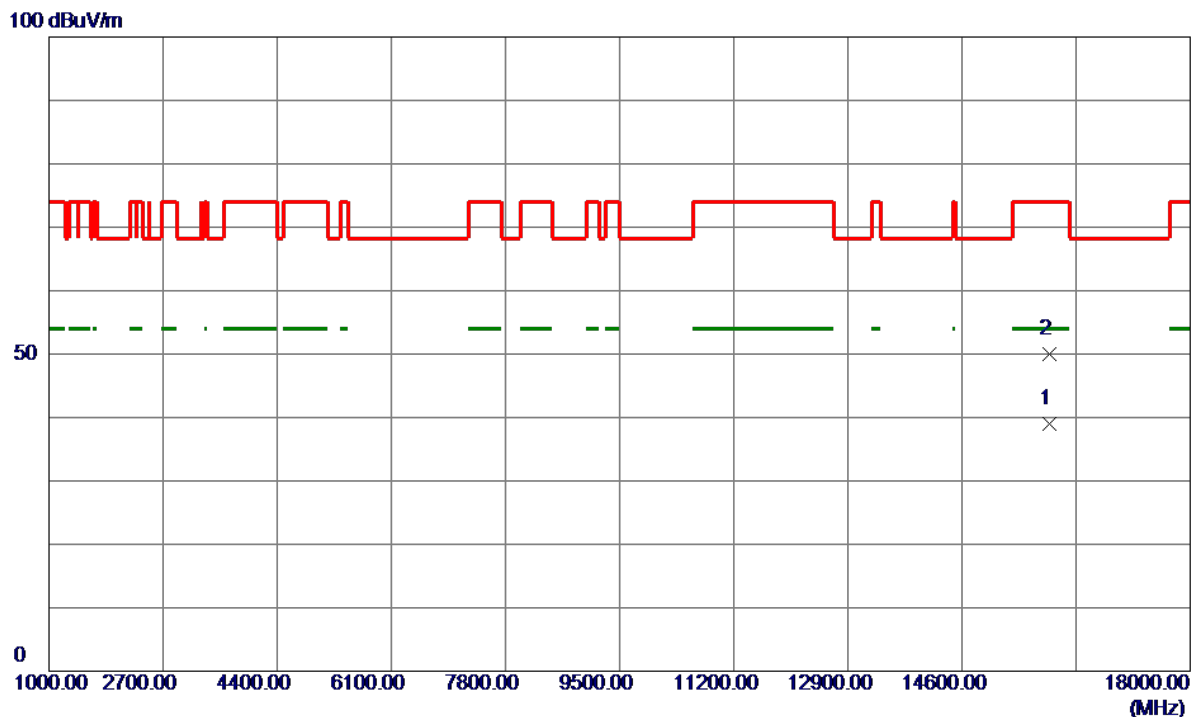


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15899.5750	26.08	12.92	39.00	54.00	-15.00	AVG	
2	15899.1100	37.06	12.92	49.98	74.00	-24.02	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT20) Mode 5320 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

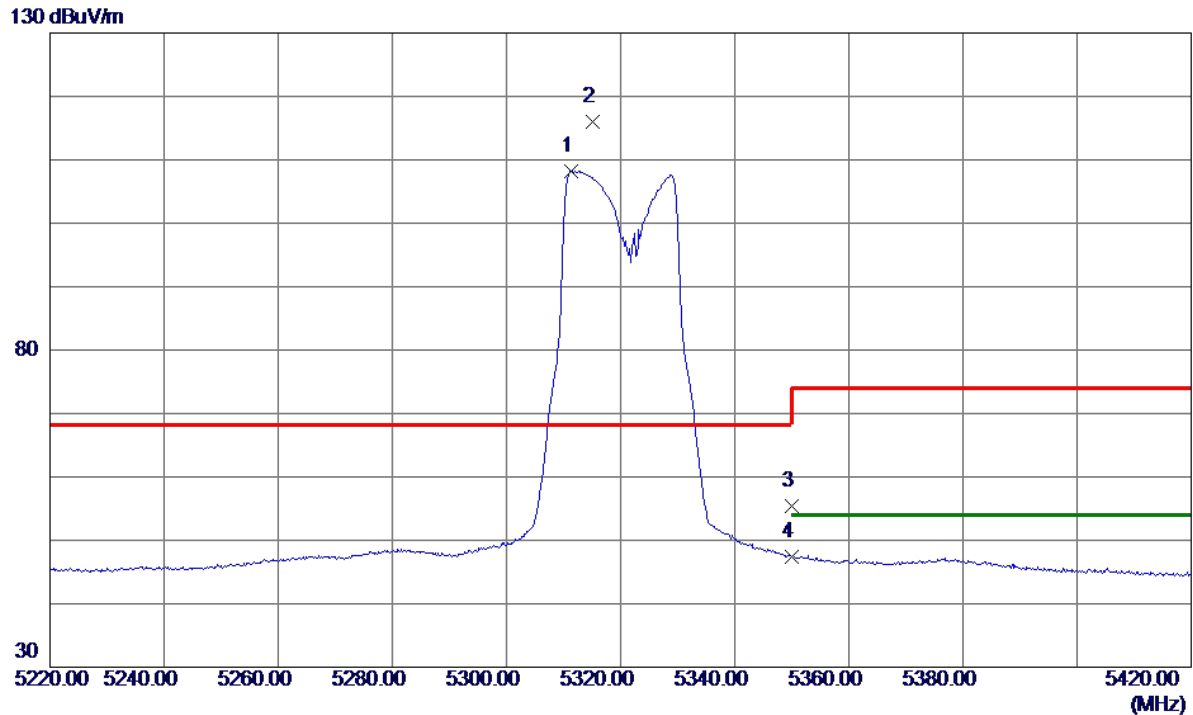


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5311.4000	93.26	14.91	108.17	999.00	-890.83	AVG	No Limit
2 *	5315.2000	100.99	14.92	115.91	68.20	47.71	Peak	No Limit
3	5350.0000	40.33	15.02	55.35	74.00	-18.65	Peak	
4	5350.0000	32.45	15.02	47.47	54.00	-6.53	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT20) Mode 5320 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

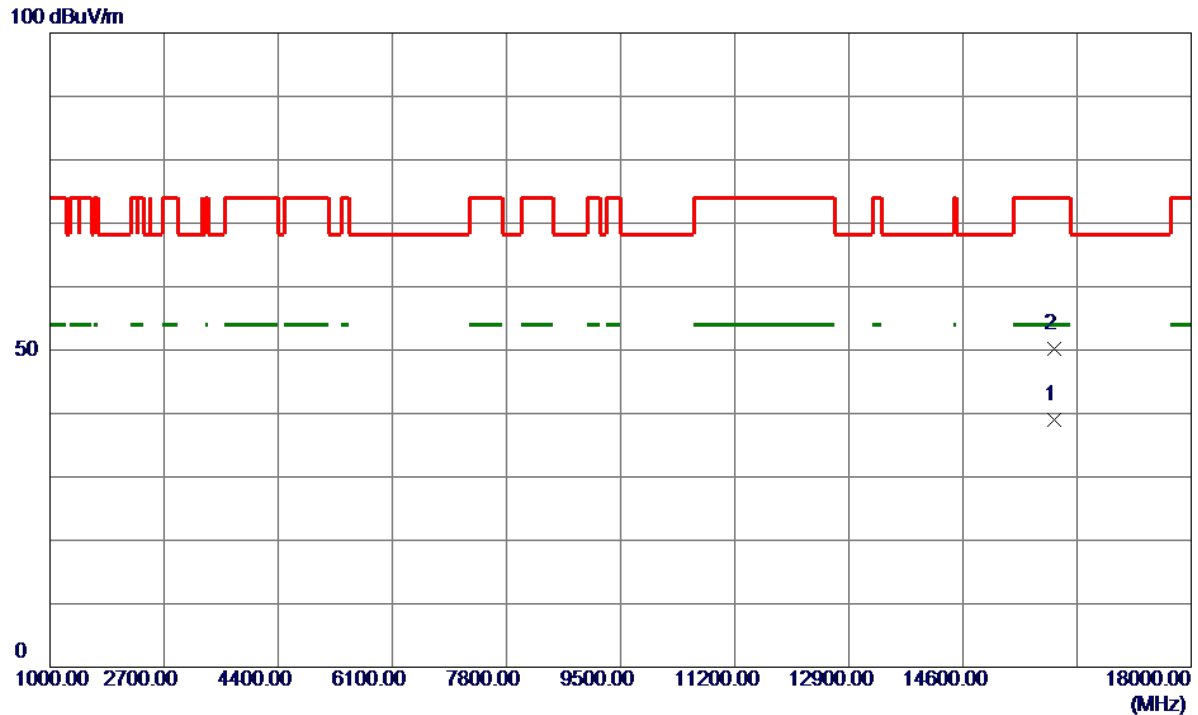


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15961.3100	25.97	12.97	38.94	54.00	-15.06	AVG	
2	15959.5250	37.27	12.97	50.24	74.00	-23.76	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT40) Mode 5270 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

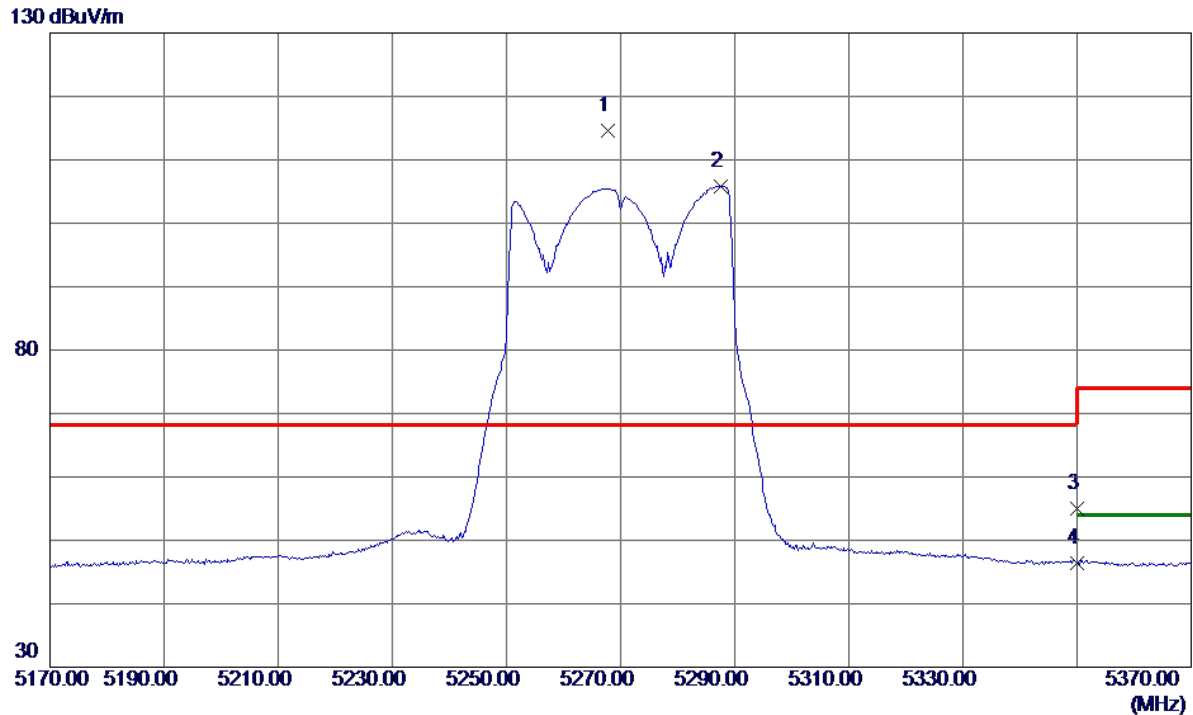


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5267.8000	99.90	14.79	114.69	68.20	46.49	Peak	No Limit
2	5287.6000	91.03	14.85	105.88	999.00	-893.12	AVG	No Limit
3	5350.0000	40.03	15.02	55.05	74.00	-18.95	Peak	
4	5350.0000	31.46	15.02	46.48	54.00	-7.52	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT40) Mode 5270 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

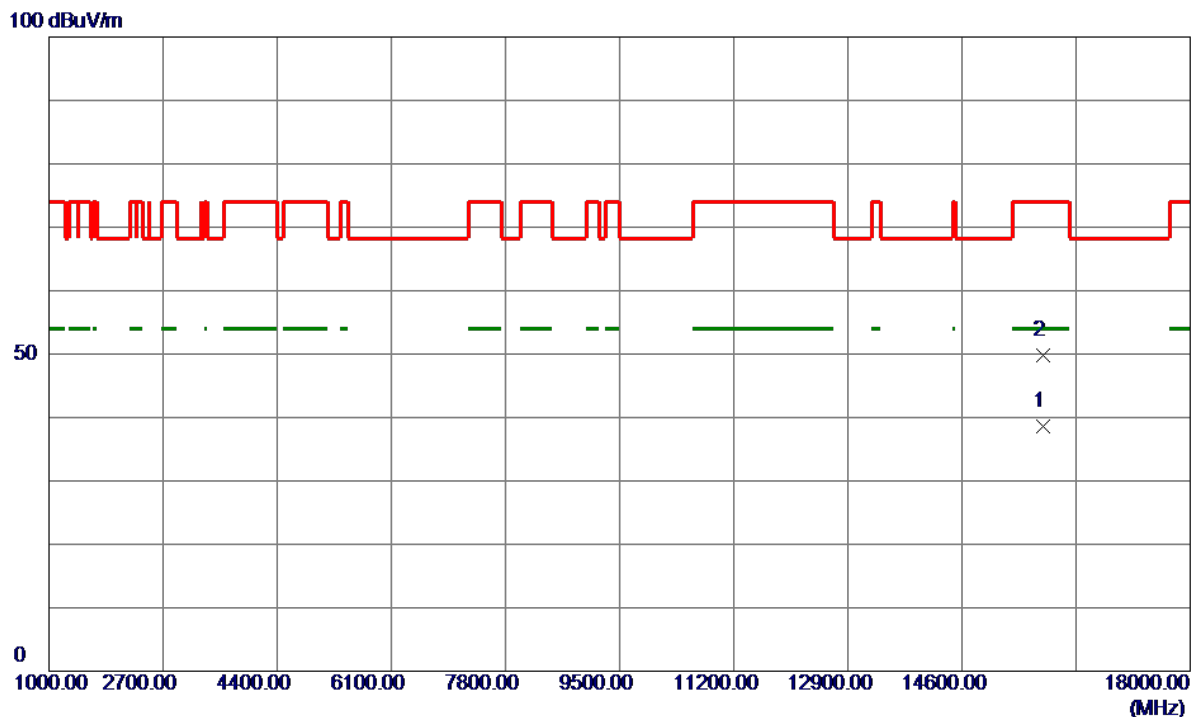


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15810.2100	25.74	12.85	38.59	54.00	-15.41	AVG	
2	15809.8600	36.96	12.85	49.81	74.00	-24.19	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

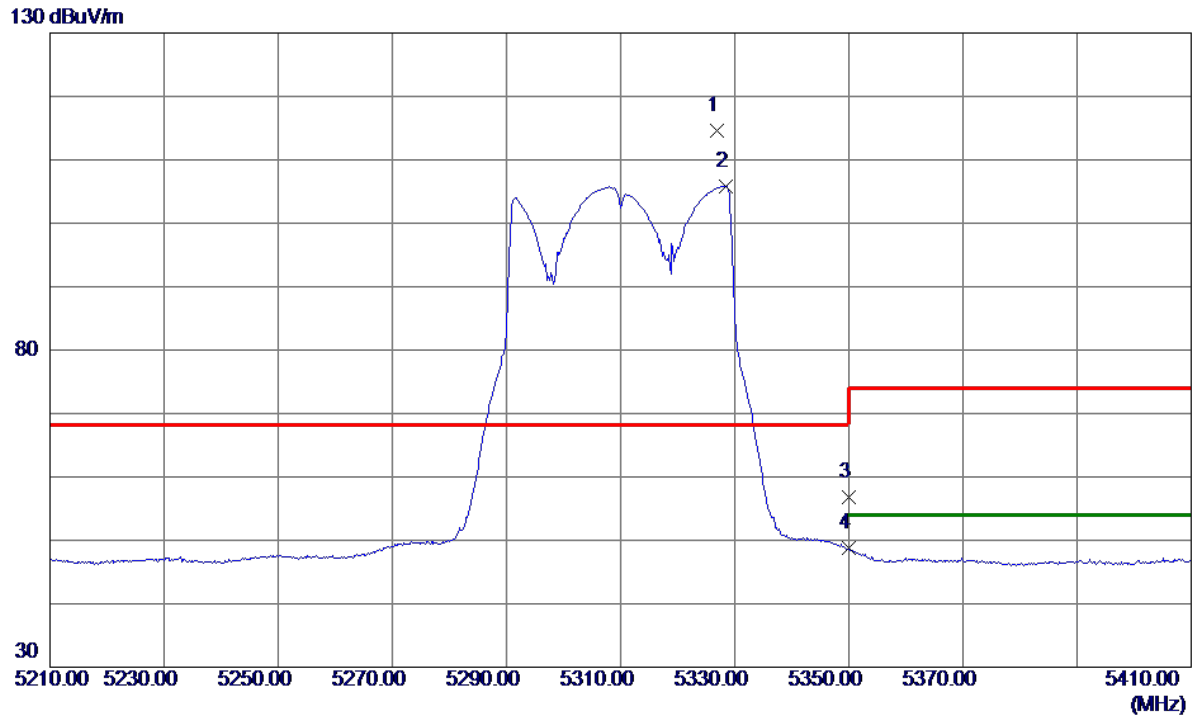


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5326.8000	99.66	14.96	114.62	68.20	46.42	Peak	No Limit
2	5328.4000	90.92	14.96	105.88	999.00	-893.12	AVG	No Limit
3	5350.0000	41.73	15.02	56.75	74.00	-17.25	Peak	
4	5350.0000	33.69	15.02	48.71	54.00	-5.29	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

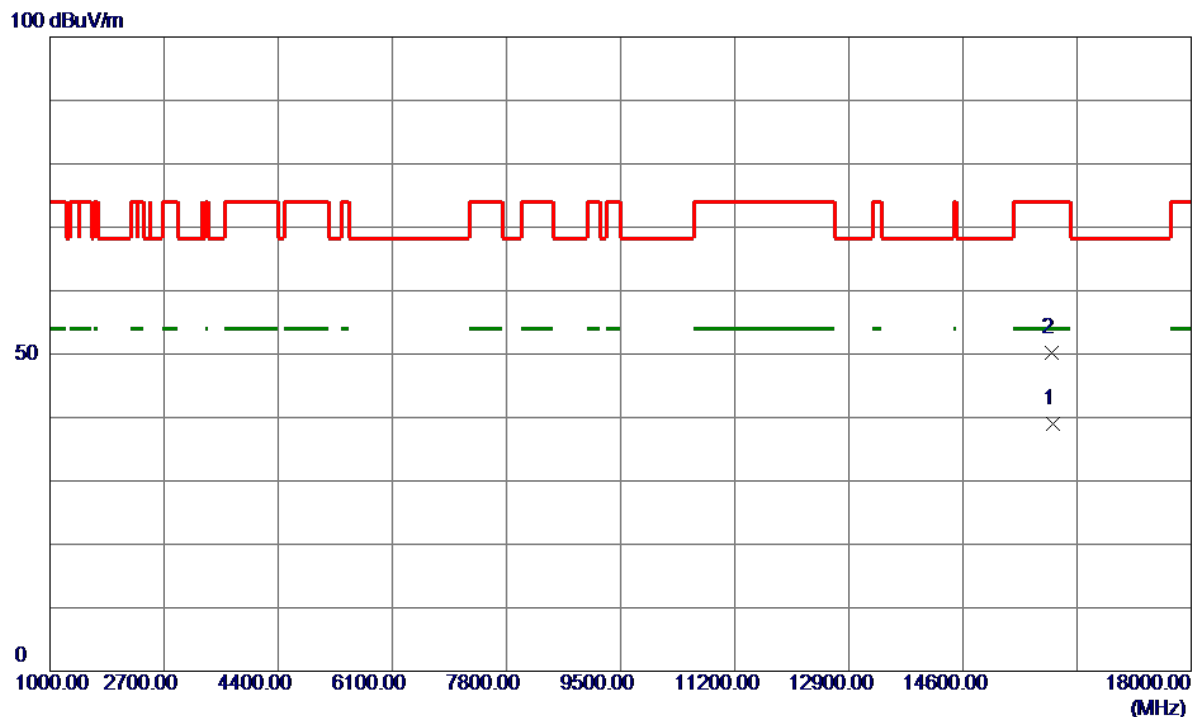


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15932.1900	26.08	12.95	39.03	54.00	-14.97	AVG	
2	15929.4900	37.29	12.94	50.23	74.00	-23.77	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

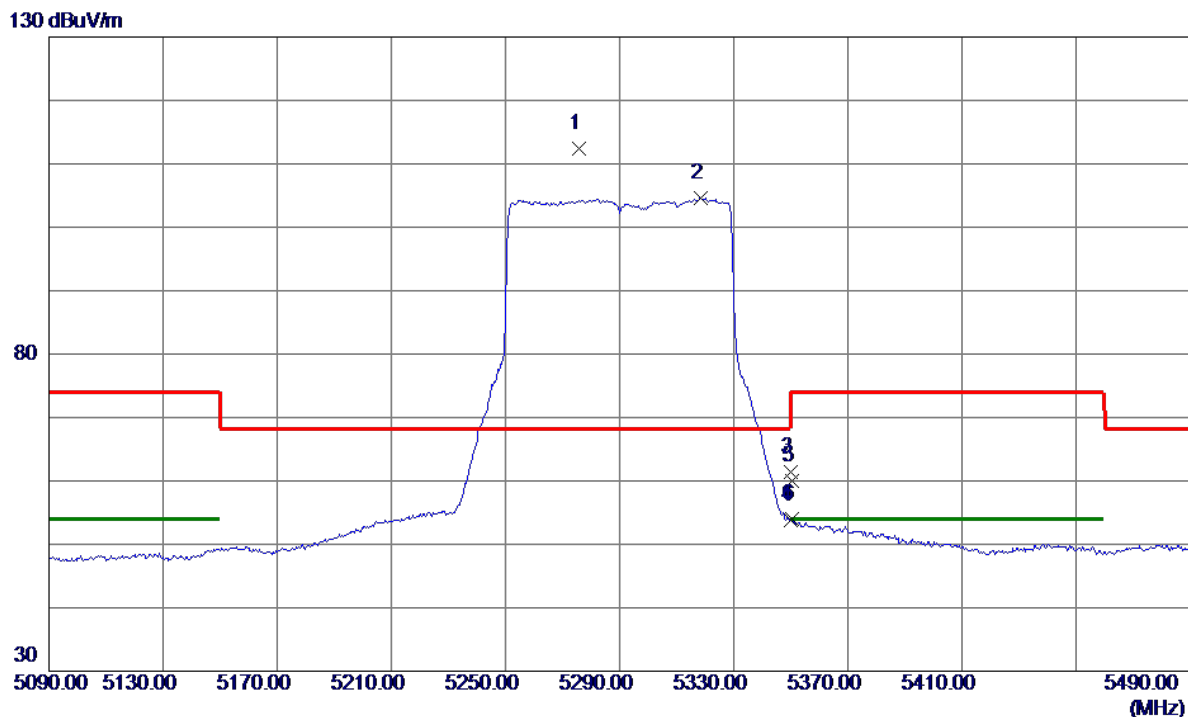


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5275.6000	97.66	14.81	112.47	68.20	44.27	Peak	No Limit
2	5318.4000	89.71	14.93	104.64	999.00	-894.36	AVG	No Limit
3	5350.0000	46.35	15.02	61.37	74.00	-12.63	Peak	
4	5350.0000	38.87	15.02	53.89	54.00	-0.11	AVG	
5	5350.4000	44.91	15.03	59.94	74.00	-14.06	Peak	
6	5350.4000	38.88	15.03	53.91	54.00	-0.09	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

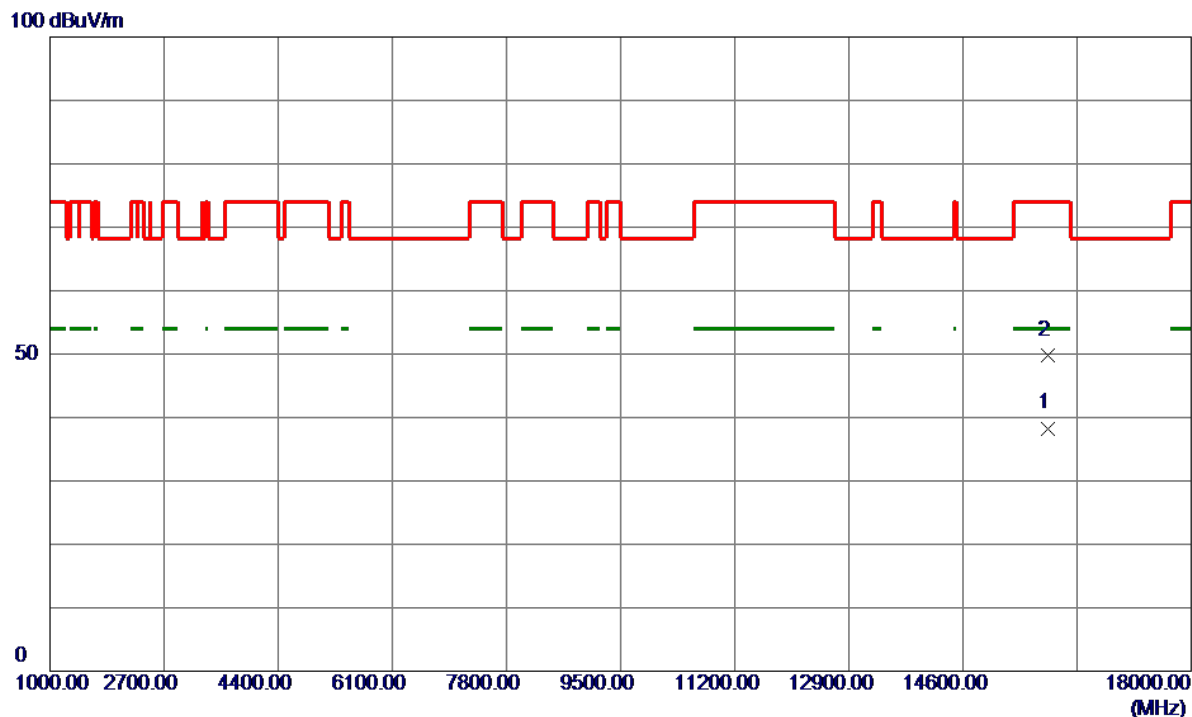


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15870.0000	25.40	12.90	38.30	54.00	-15.70	AVG	
2	15870.0000	36.97	12.90	49.87	74.00	-24.13	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode 5250 MHz	Polarization	Vertical
-----------	--	--------------	----------

130 dBuV/m

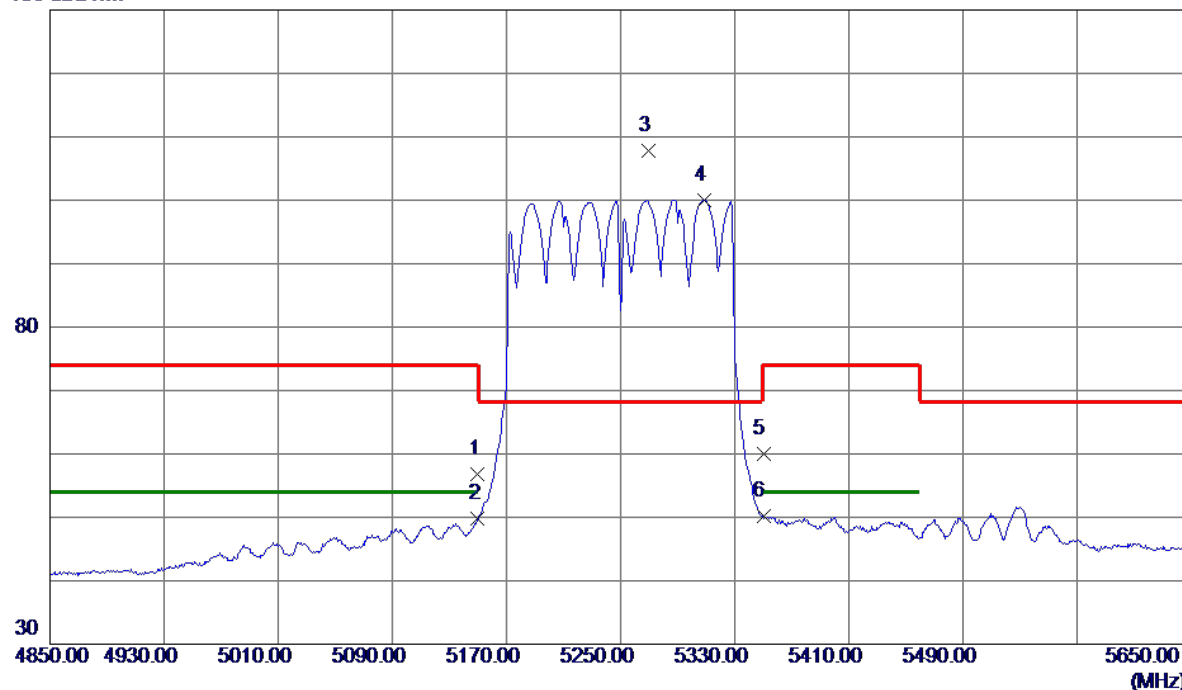


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	42.27	14.45	56.72	74.00	-17.28	Peak	
2	5150.0000	35.29	14.45	49.74	54.00	-4.26	AVG	
3 *	5269.2000	93.09	14.79	107.88	68.20	39.68	Peak	No Limit
4	5308.4000	85.15	14.90	100.05	999.00	-898.95	AVG	No Limit
5	5350.0000	45.05	15.02	60.07	74.00	-13.93	Peak	
6	5350.0000	35.22	15.02	50.24	54.00	-3.76	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode 5250 MHz	Polarization	Vertical
-----------	--	--------------	----------

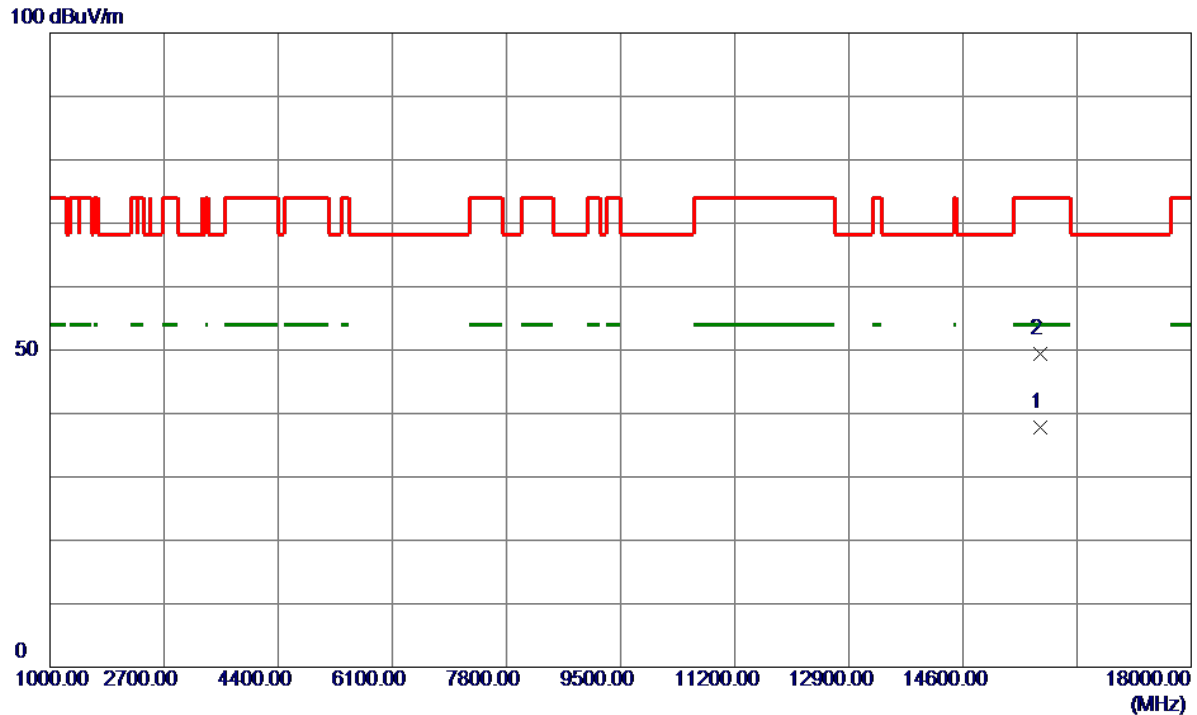


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15750.0000	24.92	12.80	37.72	54.00	-16.28	AVG	
2	15750.0000	36.68	12.80	49.48	74.00	-24.52	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX BE(EHT160) Mode 5250 MHz	Polarization	Vertical
-----------	--	--------------	----------

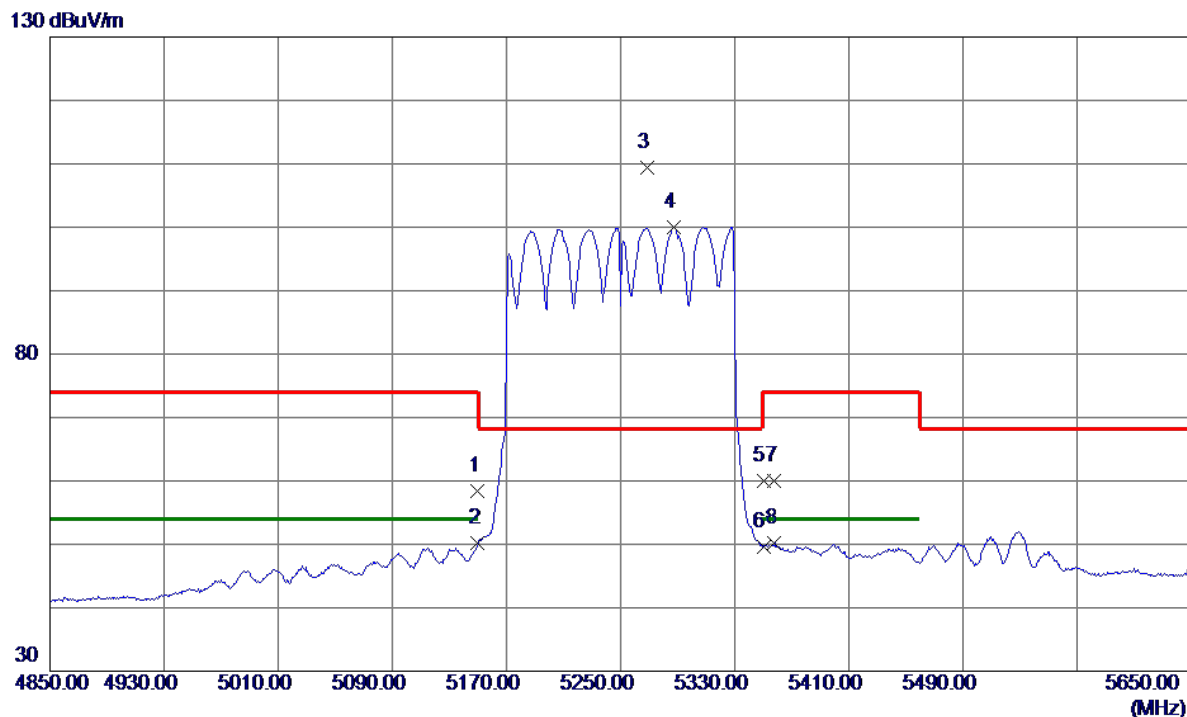


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	43.92	14.45	58.37	74.00	-15.63	Peak	
2	5150.0000	35.71	14.45	50.16	54.00	-3.84	AVG	
3 *	5268.4000	94.56	14.79	109.35	68.20	41.15	Peak	No Limit
4	5287.6000	85.19	14.85	100.04	999.00	-898.96	AVG	No Limit
5	5350.0000	45.00	15.02	60.02	74.00	-13.98	Peak	
6	5350.0000	34.65	15.02	49.67	54.00	-4.33	AVG	
7	5358.0000	44.95	15.05	60.00	74.00	-14.00	Peak	
8	5358.0000	35.14	15.05	50.19	54.00	-3.81	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX BE(EHT160) Mode 5250 MHz	Polarization	Vertical
-----------	--	--------------	----------

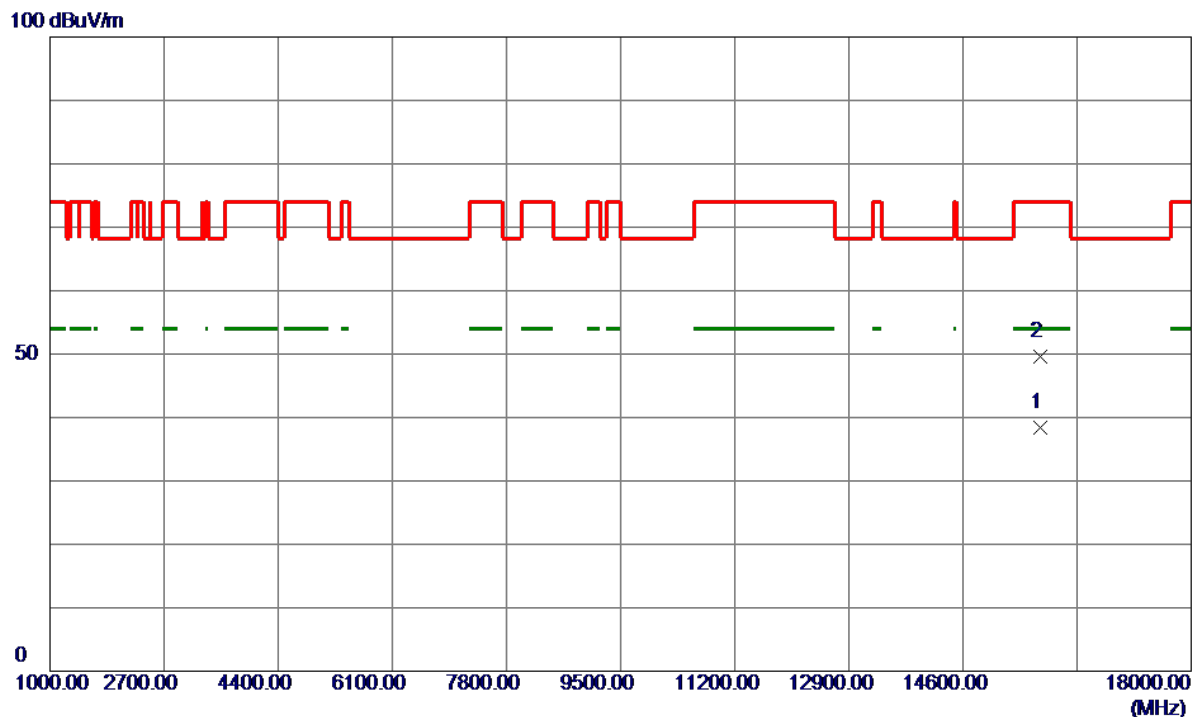


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15748.5400	25.59	12.80	38.39	54.00	-15.61	AVG	
2	15748.7850	36.81	12.80	49.61	74.00	-24.39	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

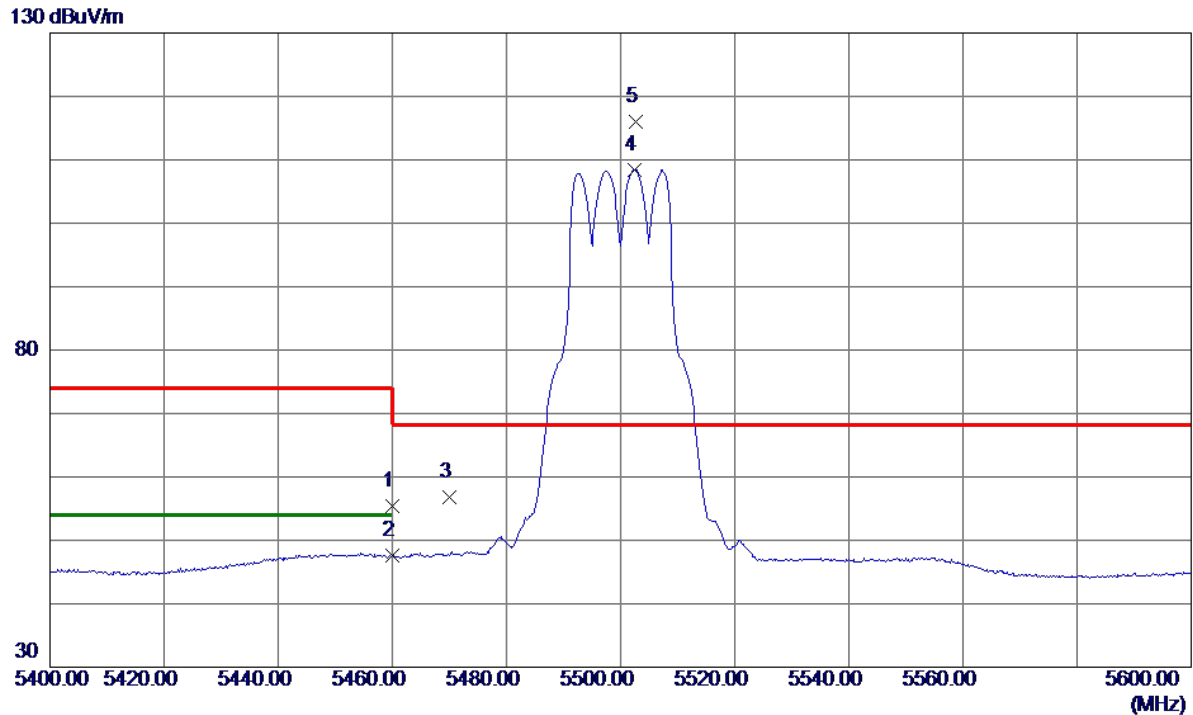


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	40.09	15.34	55.43	74.00	-18.57	Peak	
2	5460.0000	32.18	15.34	47.52	54.00	-6.48	AVG	
3	5470.0000	41.39	15.37	56.76	68.20	-11.44	Peak	
4	5502.4000	93.01	15.46	108.47	999.00	-890.53	AVG	No Limit
5 *	5502.6000	100.48	15.46	115.94	68.20	47.74	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

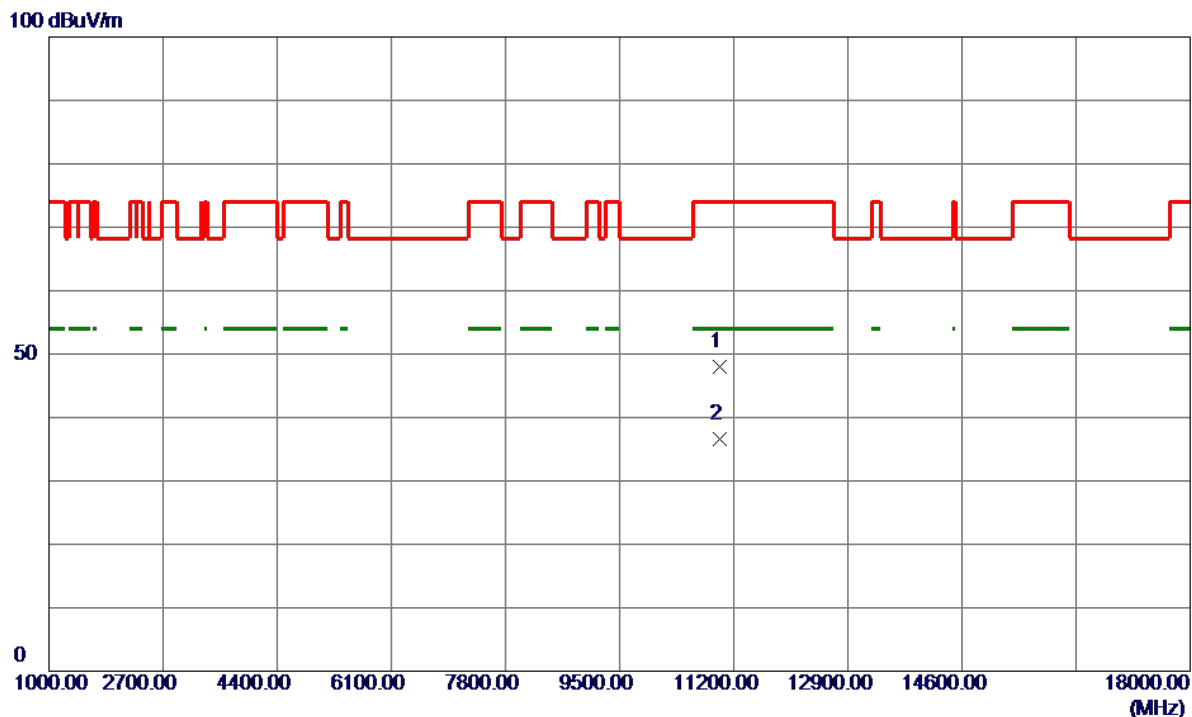


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.4900	36.30	11.76	48.06	74.00	-25.94	Peak	
2 *	11001.2100	24.91	11.76	36.67	54.00	-17.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

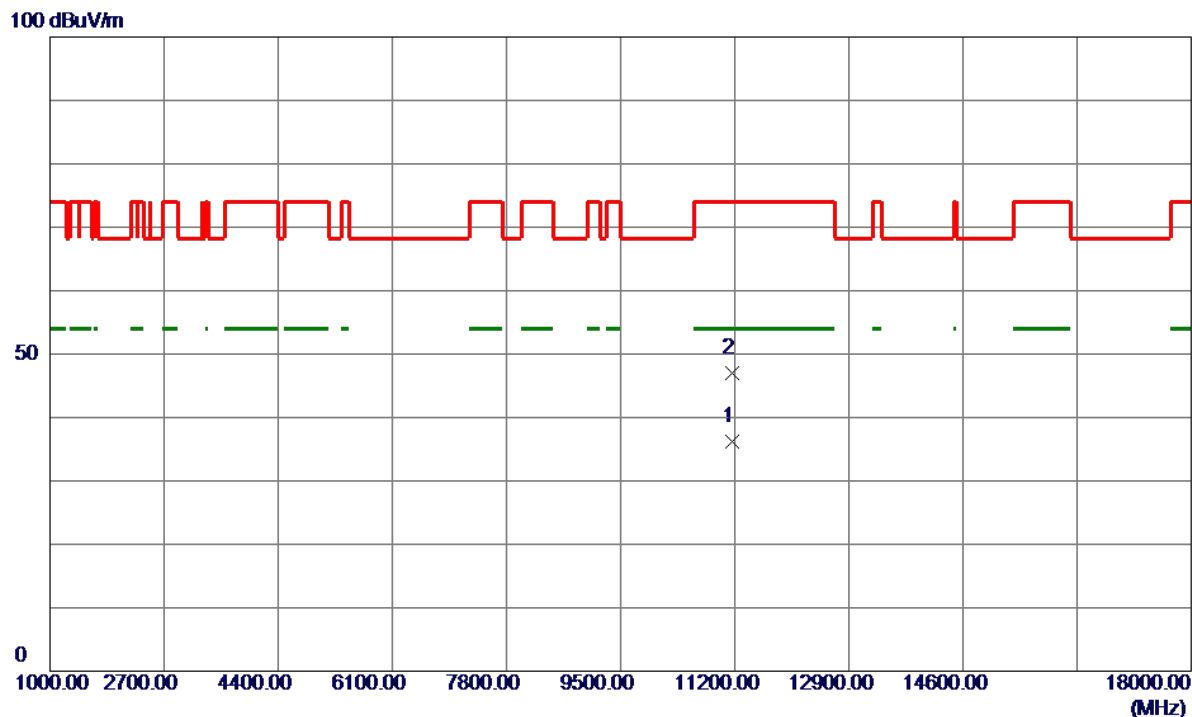


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11163.9100	24.14	11.97	36.11	54.00	-17.89	AVG	
2	11164.4000	35.06	11.97	47.03	74.00	-26.97	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

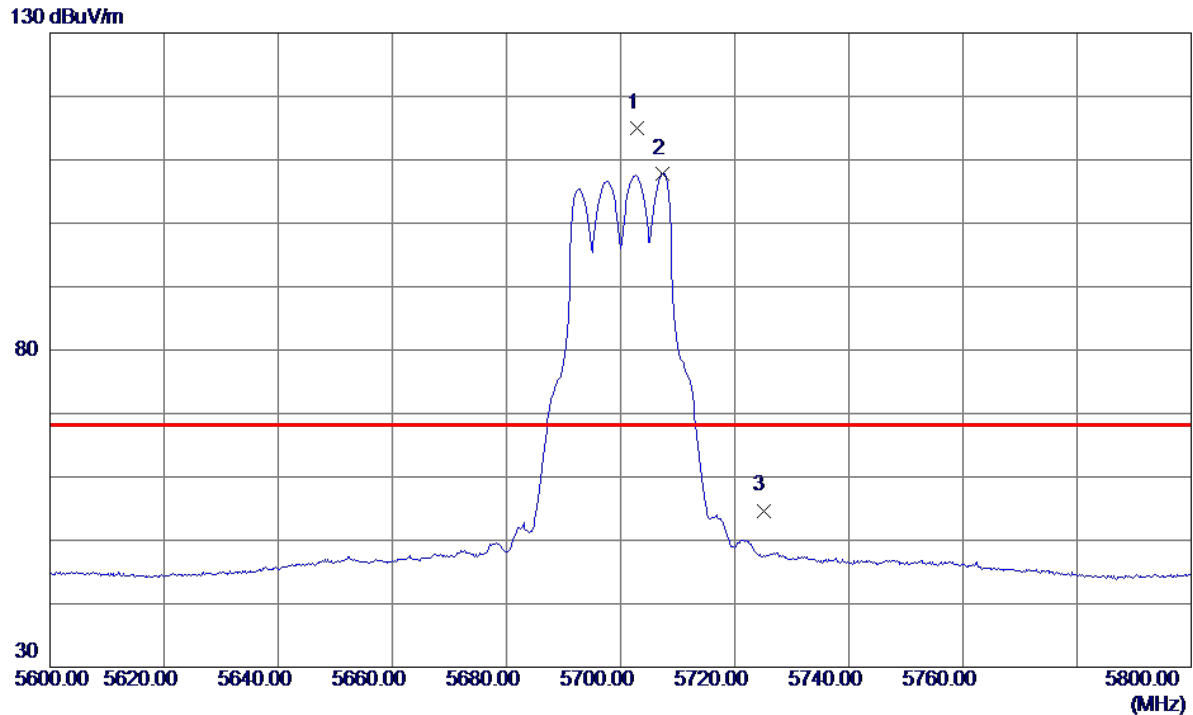


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5702.8000	98.90	16.15	115.05	68.20	46.85	Peak	No Limit
2	5707.4000	91.71	16.16	107.87	999.00	-891.13	AVG	No Limit
3	5725.0000	38.48	16.22	54.70	68.20	-13.50	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

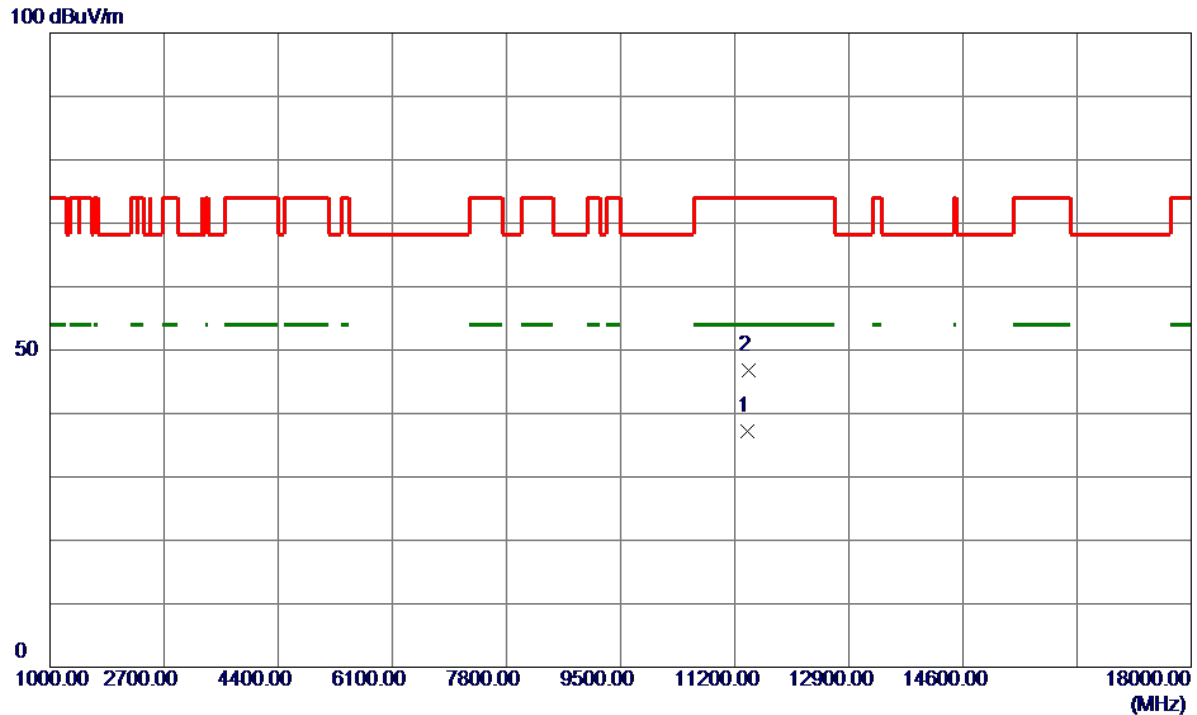


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11395.7500	24.98	12.27	37.25	54.00	-16.75	AVG	
2	11399.9600	34.60	12.28	46.88	74.00	-27.12	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

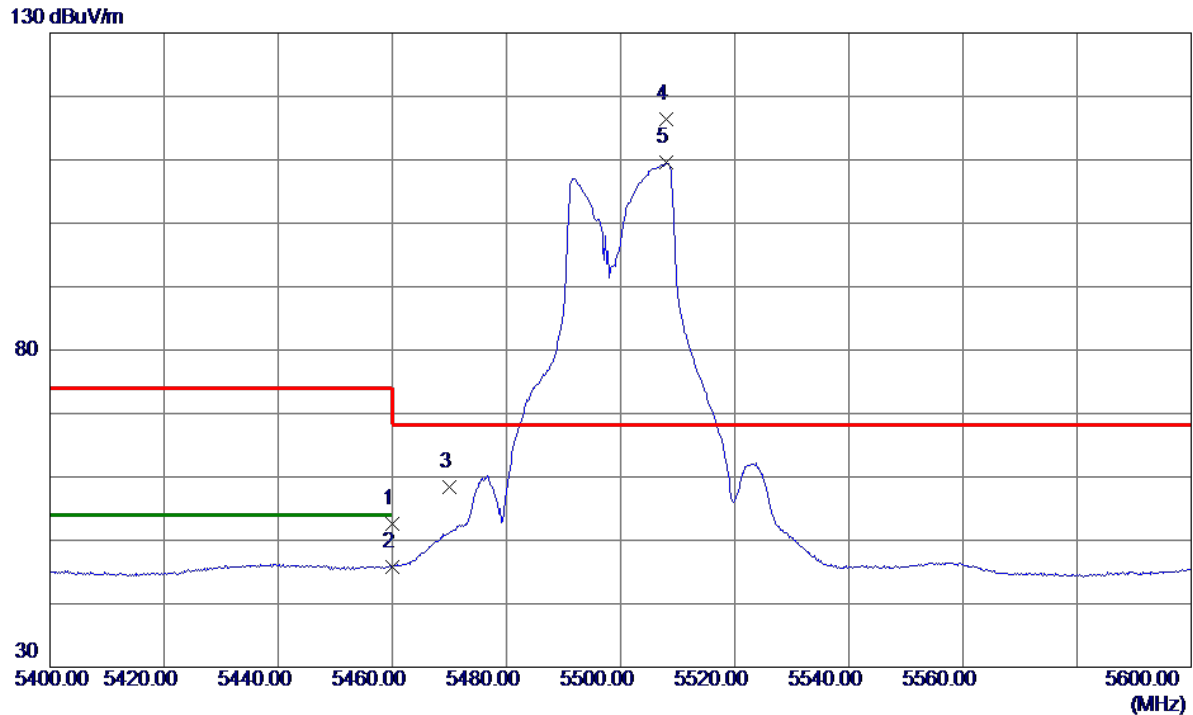


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	37.35	15.34	52.69	74.00	-21.31	Peak	
2	5460.0000	30.54	15.34	45.88	54.00	-8.12	AVG	
3	5470.0000	42.98	15.37	58.35	68.20	-9.85	Peak	
4 *	5508.0000	100.96	15.48	116.44	68.20	48.24	Peak	No Limit
5	5508.0000	94.03	15.48	109.51	999.00	-889.49	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

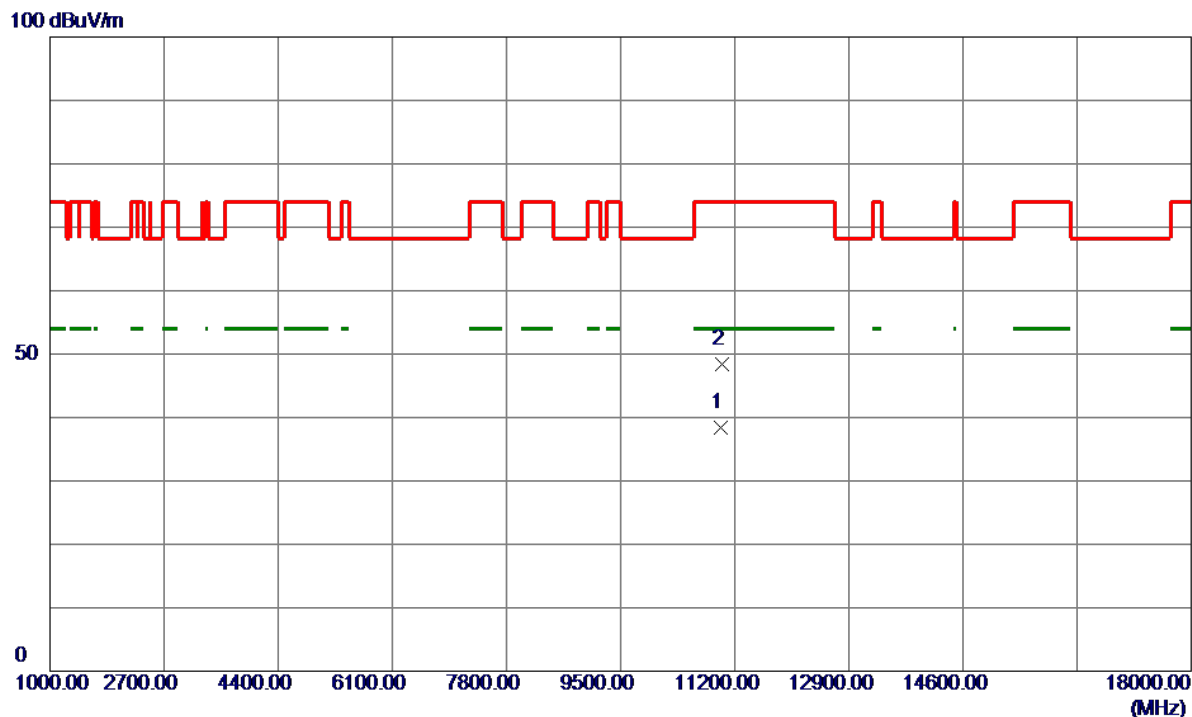


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11000.1000	26.69	11.76	38.45	54.00	-15.55	AVG	
2	11001.7000	36.65	11.76	48.41	74.00	-25.59	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

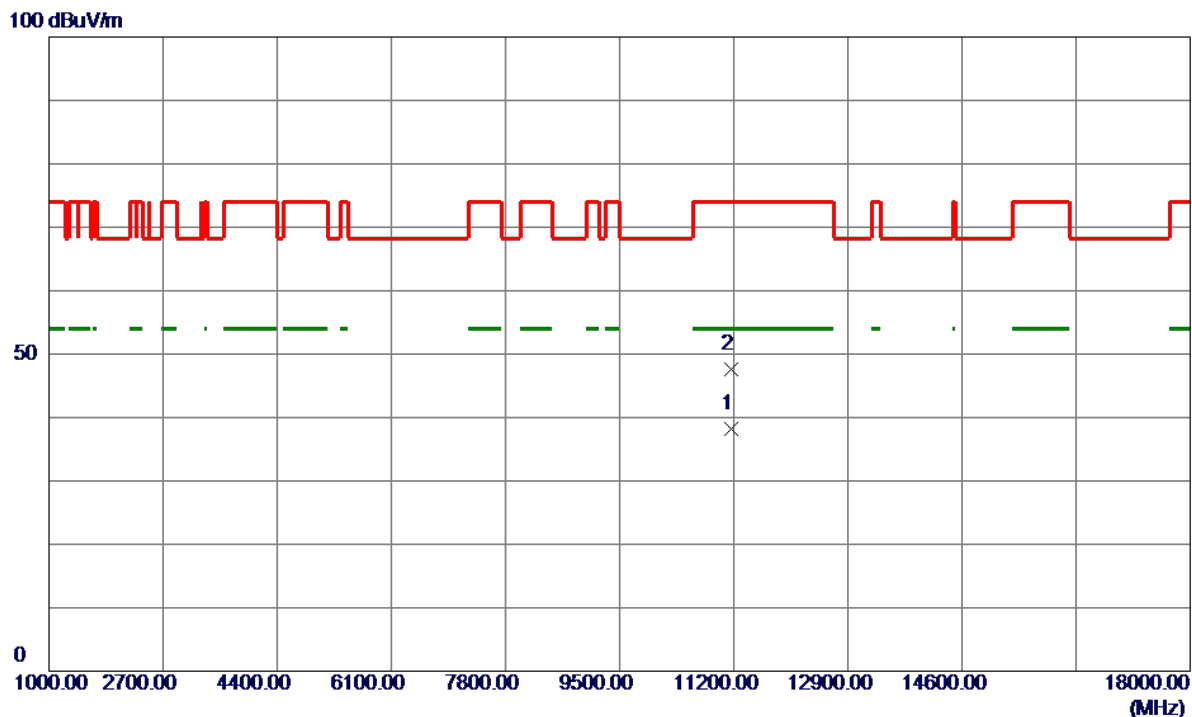


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11159.9500	26.16	11.97	38.13	54.00	-15.87	AVG	
2	11164.9000	35.68	11.97	47.65	74.00	-26.35	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

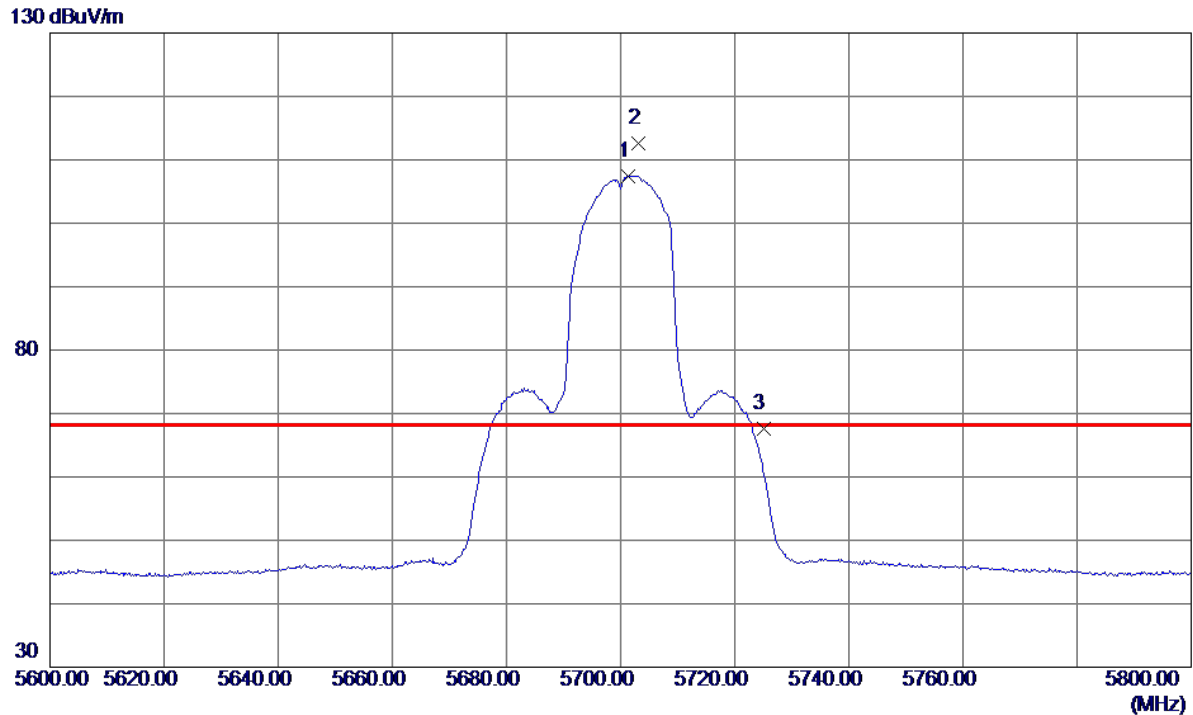


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5701.4000	91.34	16.14	107.48	999.00	-891.52	AVG	No Limit
2 *	5703.2000	96.36	16.15	112.51	68.20	44.31	Peak	No Limit
3	5725.0000	51.45	16.22	67.67	68.20	-0.53	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

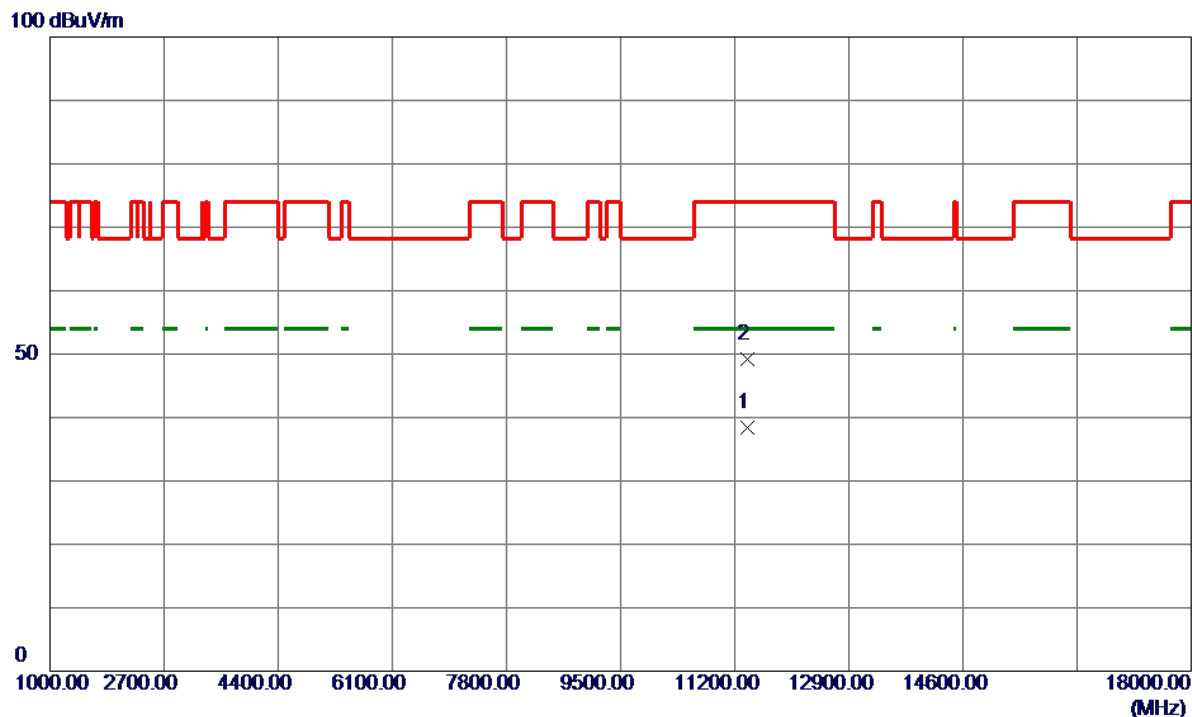


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11391.6500	26.08	12.27	38.35	54.00	-15.65	AVG	
2	11395.4000	36.98	12.27	49.25	74.00	-24.75	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

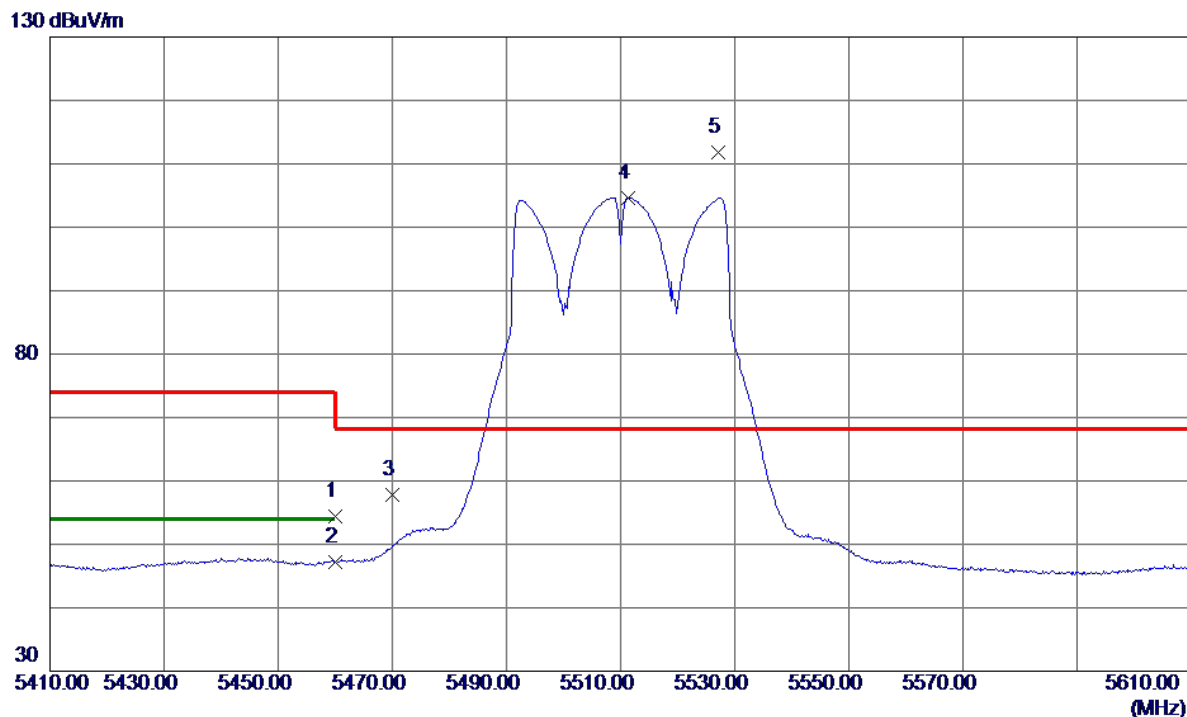


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	39.11	15.34	54.45	74.00	-19.55	Peak	
2	5460.0000	31.91	15.34	47.25	54.00	-6.75	AVG	
3	5470.0000	42.40	15.37	57.77	68.20	-10.43	Peak	
4	5511.4000	89.18	15.49	104.67	999.00	-894.33	AVG	No Limit
5 *	5527.2000	96.21	15.55	111.76	68.20	43.56	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

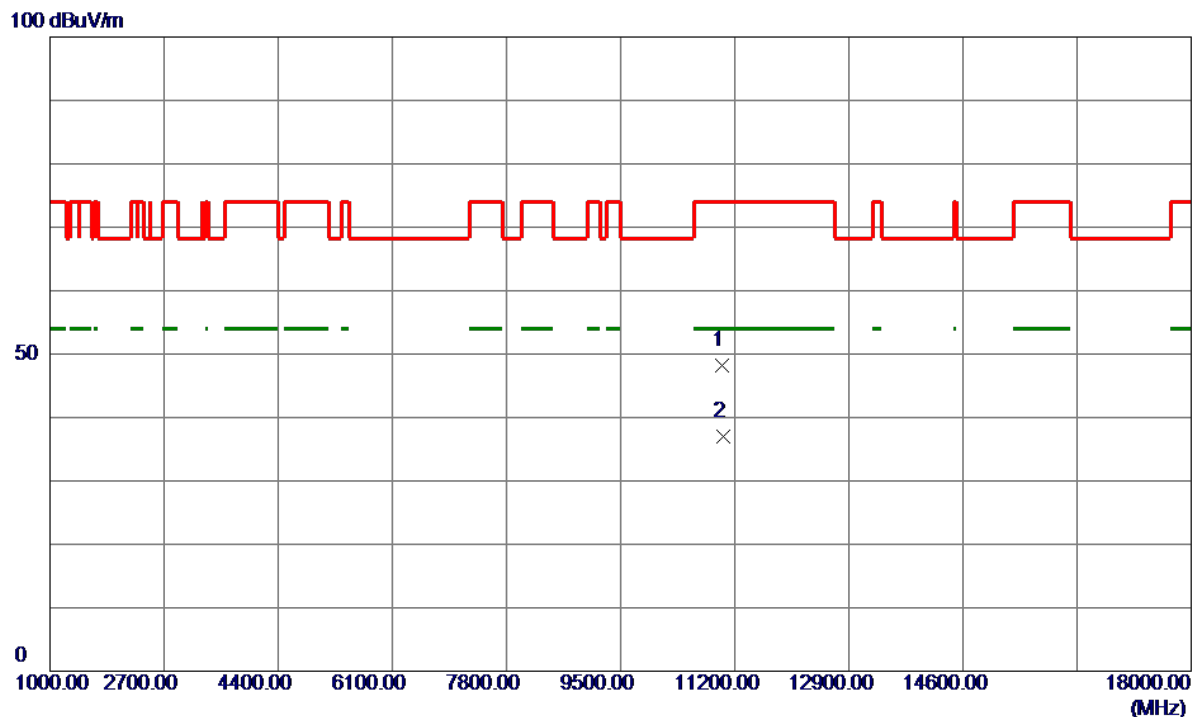


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11018.0000	36.37	11.78	48.15	74.00	-25.85	Peak	
2 *	11020.7300	25.19	11.79	36.98	54.00	-17.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

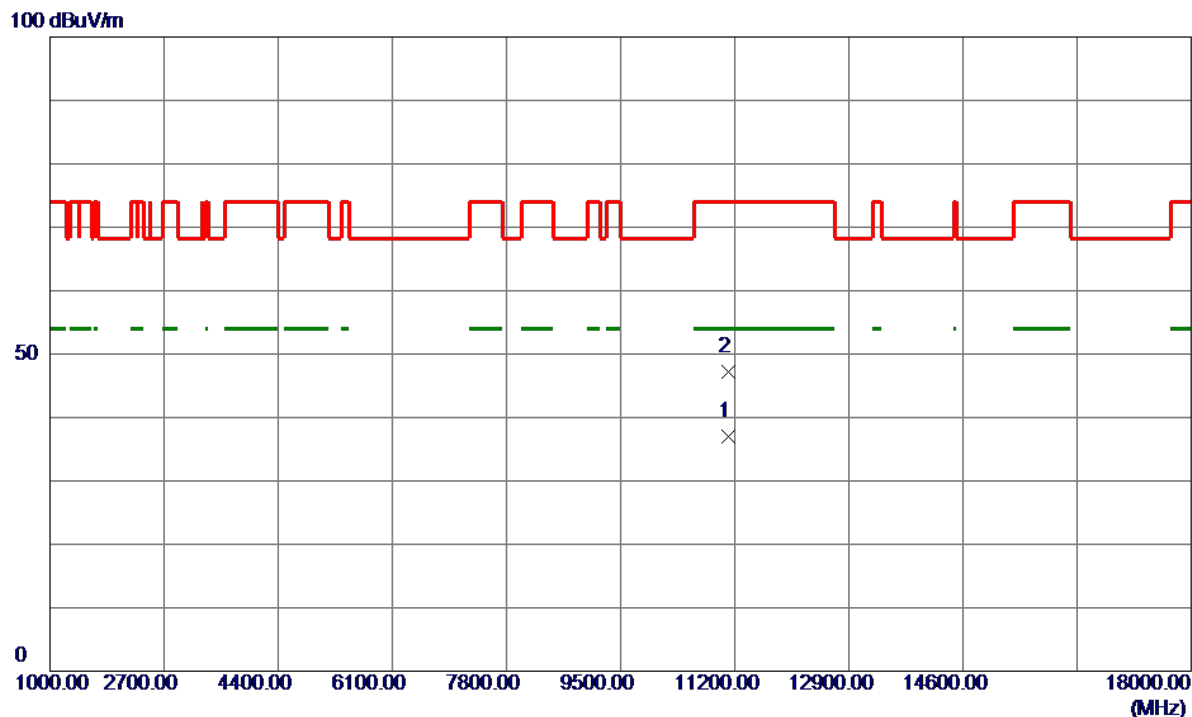


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11100.6350	25.06	11.89	36.95	54.00	-17.05	AVG	
2	11100.5250	35.29	11.89	47.18	74.00	-26.82	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

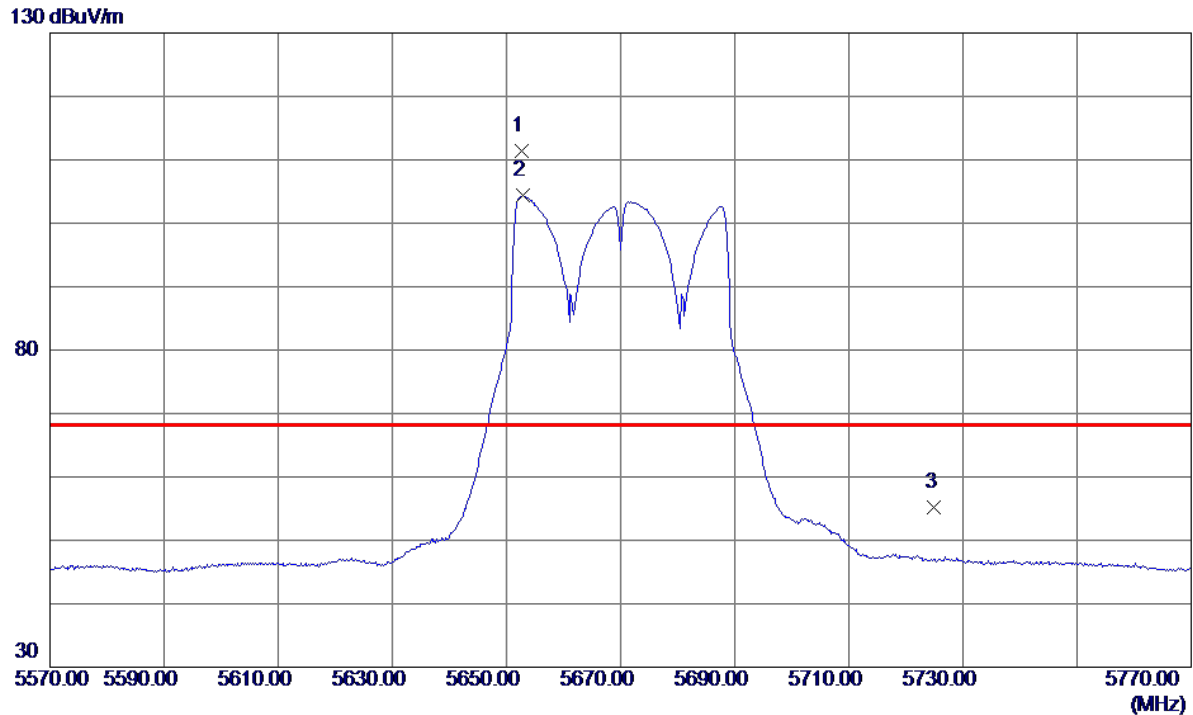


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5652.6000	95.44	15.98	111.42	68.20	43.22	Peak	No Limit
2	5652.8000	88.33	15.98	104.31	999.00	-894.69	AVG	No Limit
3	5725.0000	38.95	16.22	55.17	68.20	-13.03	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

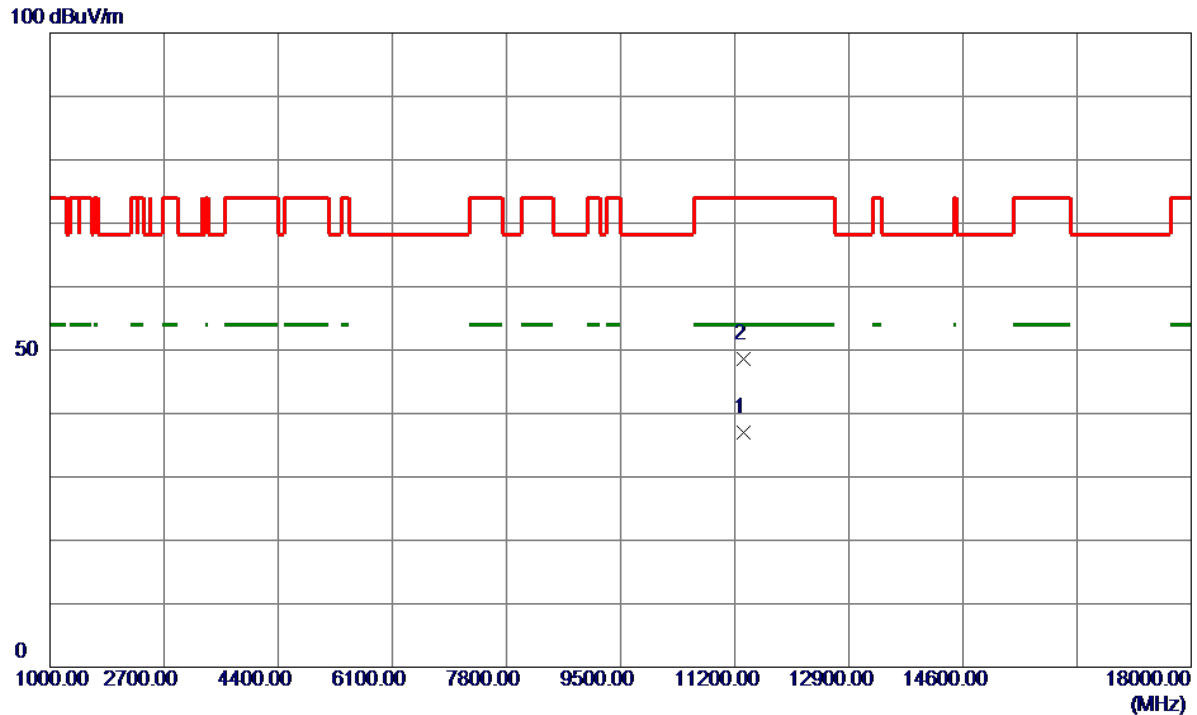


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11339.6500	24.80	12.20	37.00	54.00	-17.00	AVG	
2	11338.9000	36.44	12.20	48.64	74.00	-25.36	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

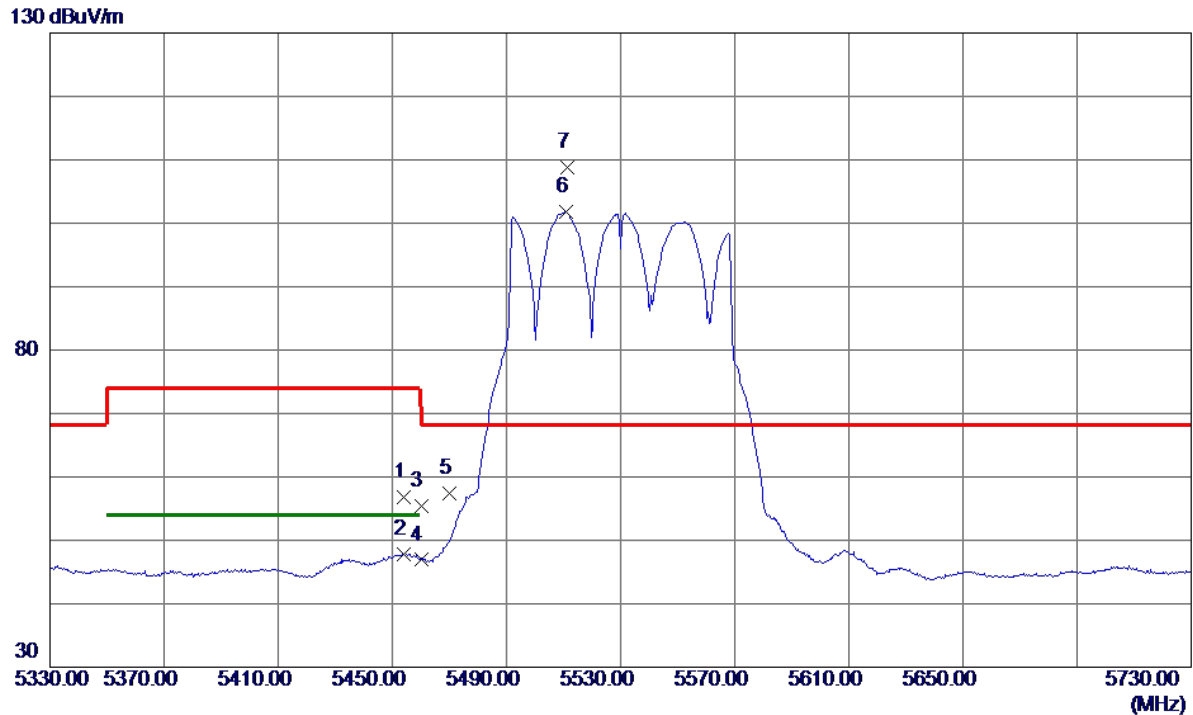


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5454.0000	41.43	15.32	56.75	74.00	-17.25	Peak	
2	5454.0000	32.55	15.32	47.87	54.00	-6.13	AVG	
3	5460.0000	39.98	15.34	55.32	74.00	-18.68	Peak	
4	5460.0000	31.56	15.34	46.90	54.00	-7.10	AVG	
5	5470.0000	42.08	15.37	57.45	68.20	-10.75	Peak	
6	5510.8000	86.27	15.49	101.76	999.00	-897.24	AVG	No Limit
7 *	5511.2000	93.34	15.49	108.83	68.20	40.63	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

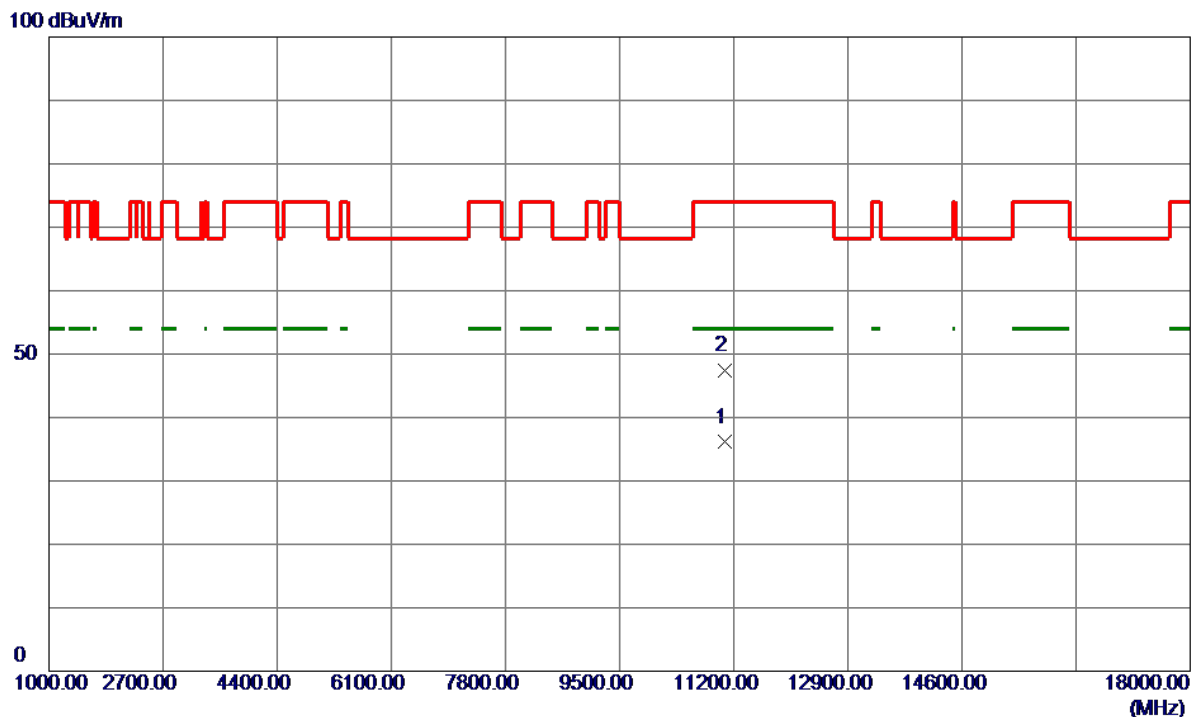


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11060.0000	24.26	11.84	36.10	54.00	-17.90	AVG	
2	11060.0000	35.51	11.84	47.35	74.00	-26.65	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

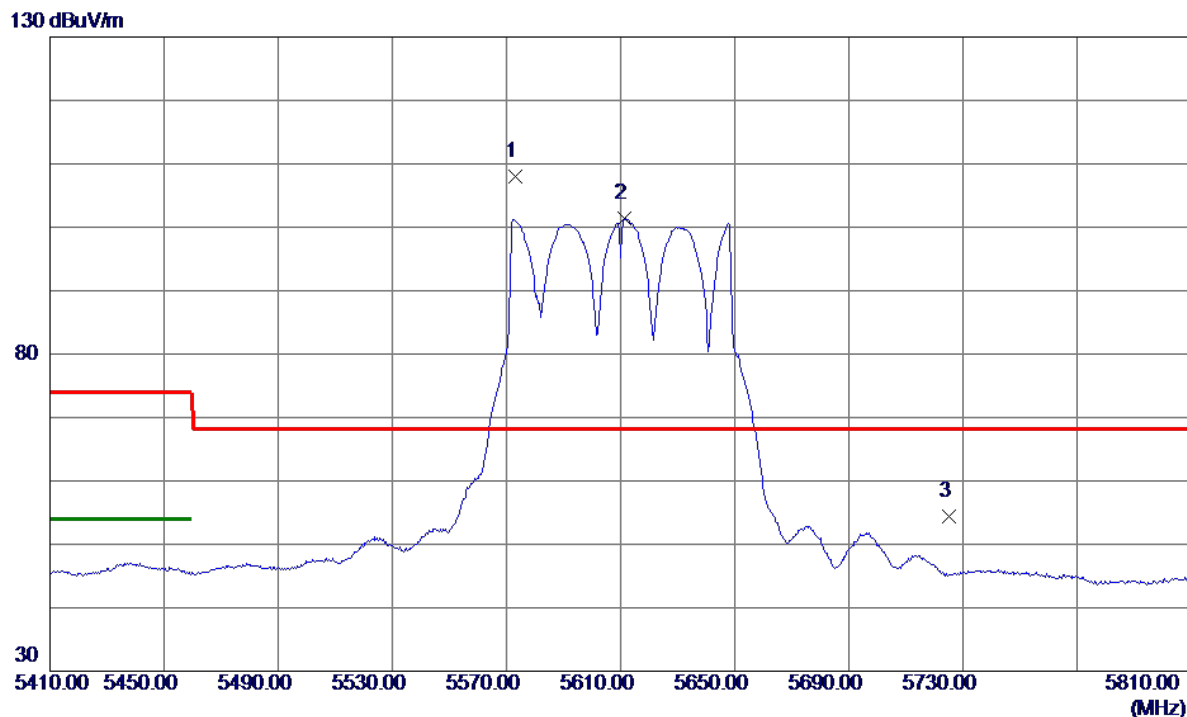


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5573.2000	92.39	15.70	108.09	68.20	39.89	Peak	No Limit
2	5611.2000	85.62	15.83	101.45	999.00	-897.55	AVG	No Limit
3	5725.0000	38.15	16.22	54.37	68.20	-13.83	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

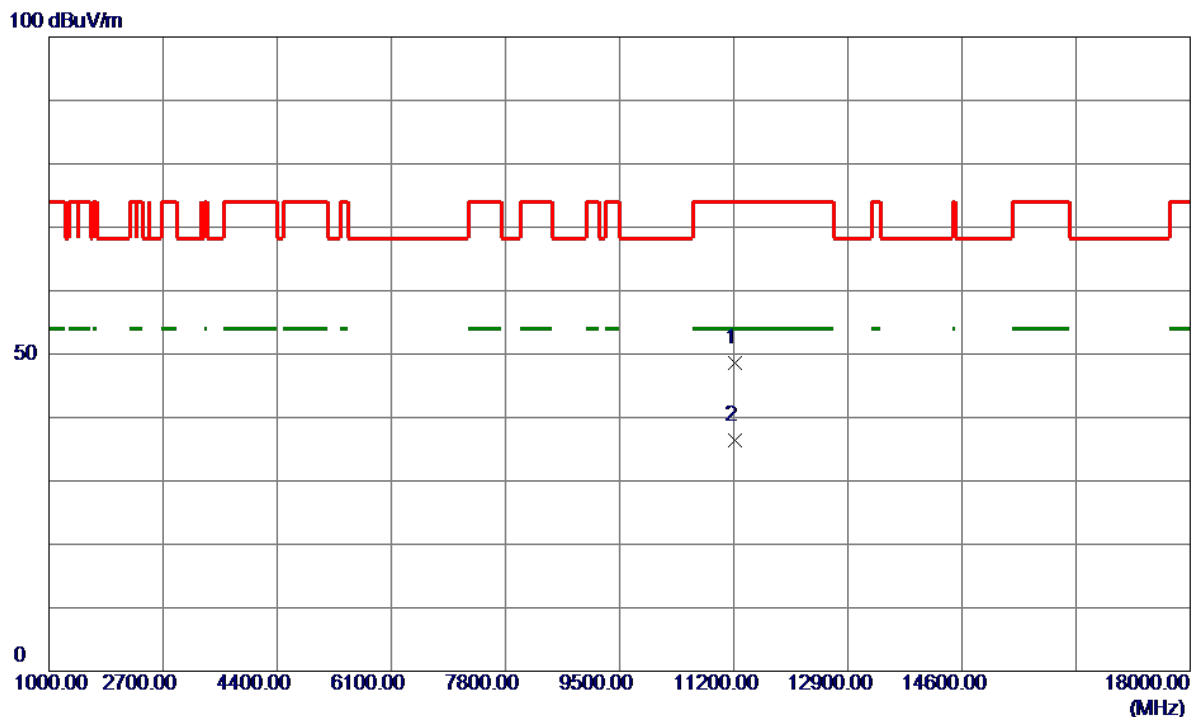


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11220.0000	36.46	12.05	48.51	74.00	-25.49	Peak	
2 *	11220.0000	24.32	12.05	36.37	54.00	-17.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

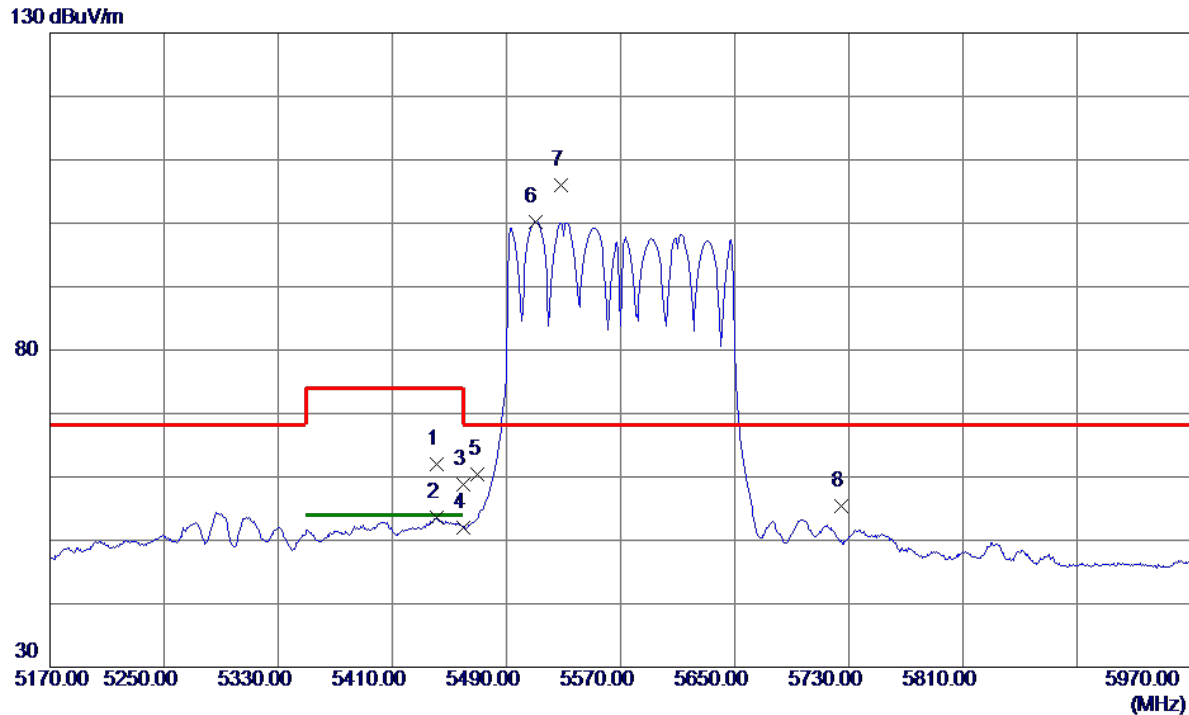


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5441.2000	46.73	15.29	62.02	74.00	-11.98	Peak	
2	5441.2000	38.26	15.29	53.55	54.00	-0.45	AVG	
3	5460.0000	43.51	15.34	58.85	74.00	-15.15	Peak	
4	5460.0000	36.69	15.34	52.03	54.00	-1.97	AVG	
5	5470.0000	45.11	15.37	60.48	68.20	-7.72	Peak	
6	5510.0000	84.75	15.49	100.24	999.00	-898.76	AVG	No Limit
7 *	5528.4000	90.35	15.55	105.90	68.20	37.70	Peak	No Limit
8	5725.0000	39.25	16.22	55.47	68.20	-12.73	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

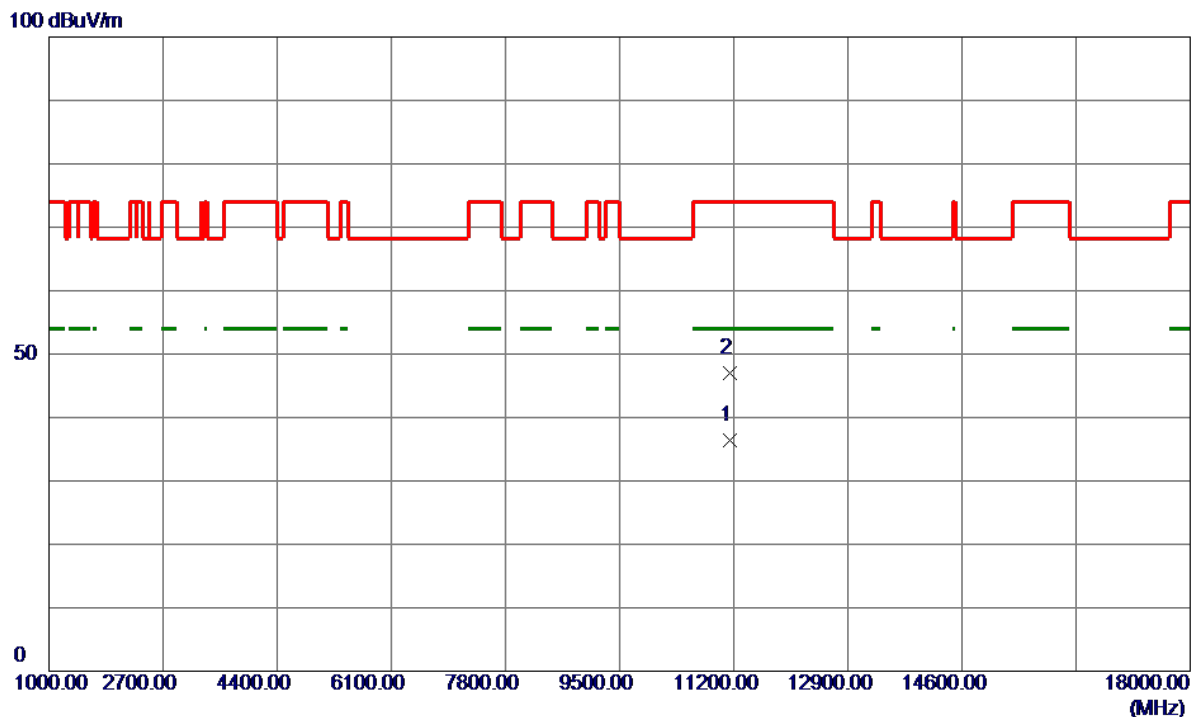


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11140.0000	24.54	11.94	36.48	54.00	-17.52	AVG	
2	11140.0000	35.00	11.94	46.94	74.00	-27.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

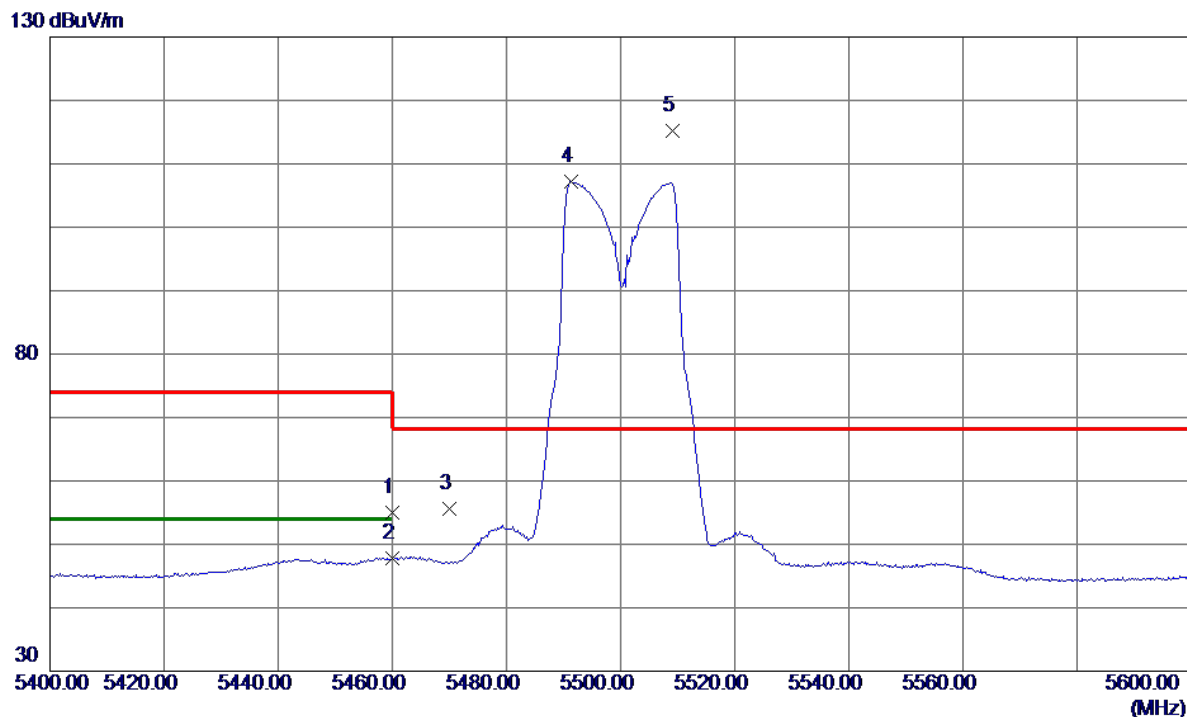


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	39.69	15.34	55.03	74.00	-18.97	Peak	
2	5460.0000	32.41	15.34	47.75	54.00	-6.25	AVG	
3	5470.0000	40.31	15.37	55.68	68.20	-12.52	Peak	
4	5491.4000	91.68	15.43	107.11	999.00	-891.89	AVG	No Limit
5 *	5509.2000	99.64	15.49	115.13	68.20	46.93	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

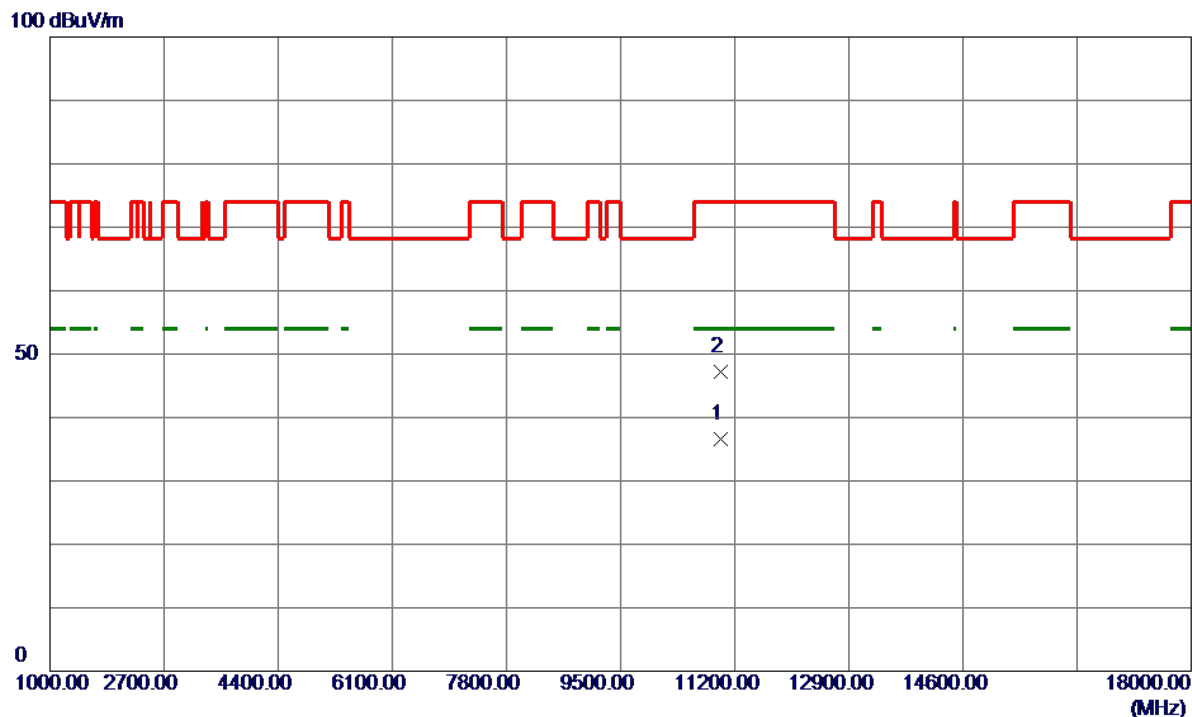


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10998.4650	24.86	11.76	36.62	54.00	-17.38	AVG	
2	10998.2450	35.39	11.76	47.15	74.00	-26.85	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5580 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

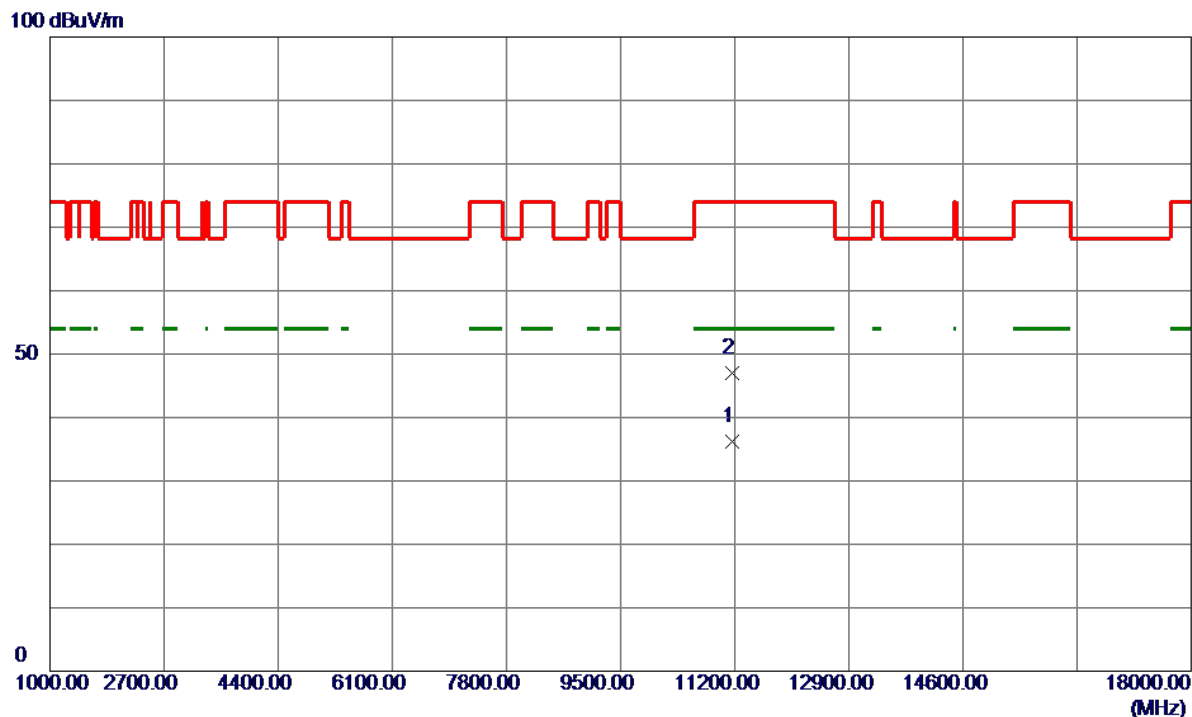


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11162.3900	24.26	11.97	36.23	54.00	-17.77	AVG	
2	11157.9900	35.00	11.97	46.97	74.00	-27.03	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

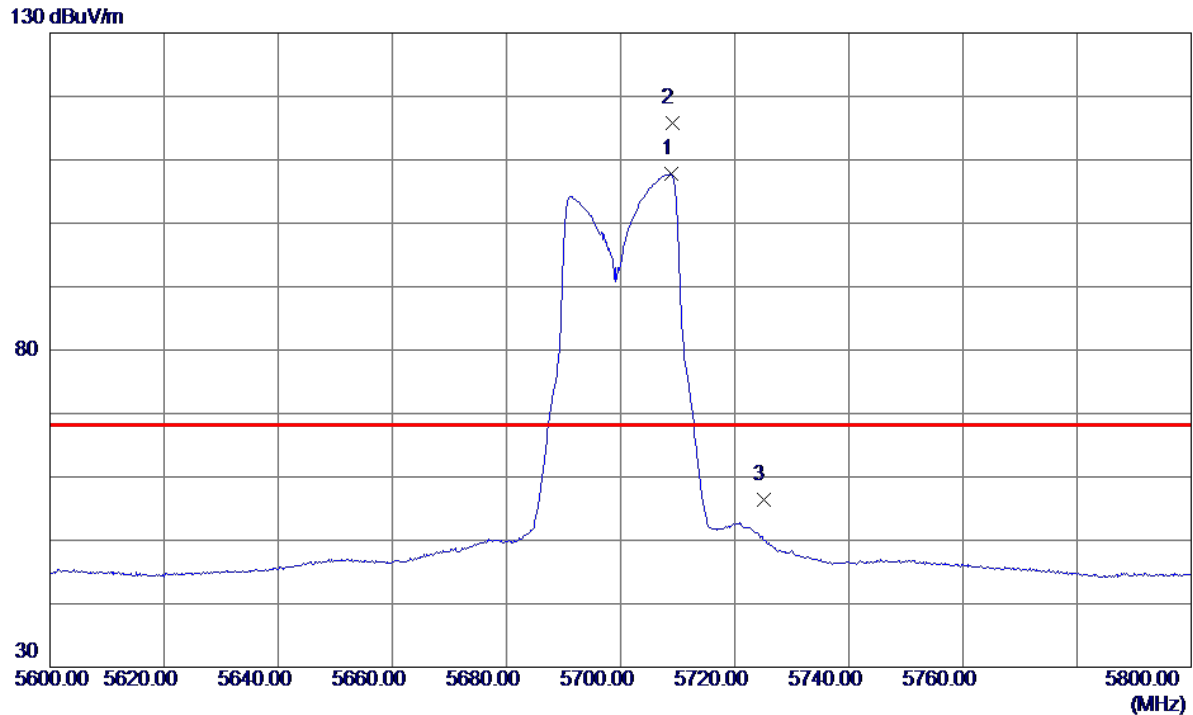


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5708.8000	91.59	16.17	107.76	999.00	-891.24	AVG	No Limit
2 *	5709.0000	99.58	16.17	115.75	68.20	47.55	Peak	No Limit
3	5725.0000	40.23	16.22	56.45	68.20	-11.75	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

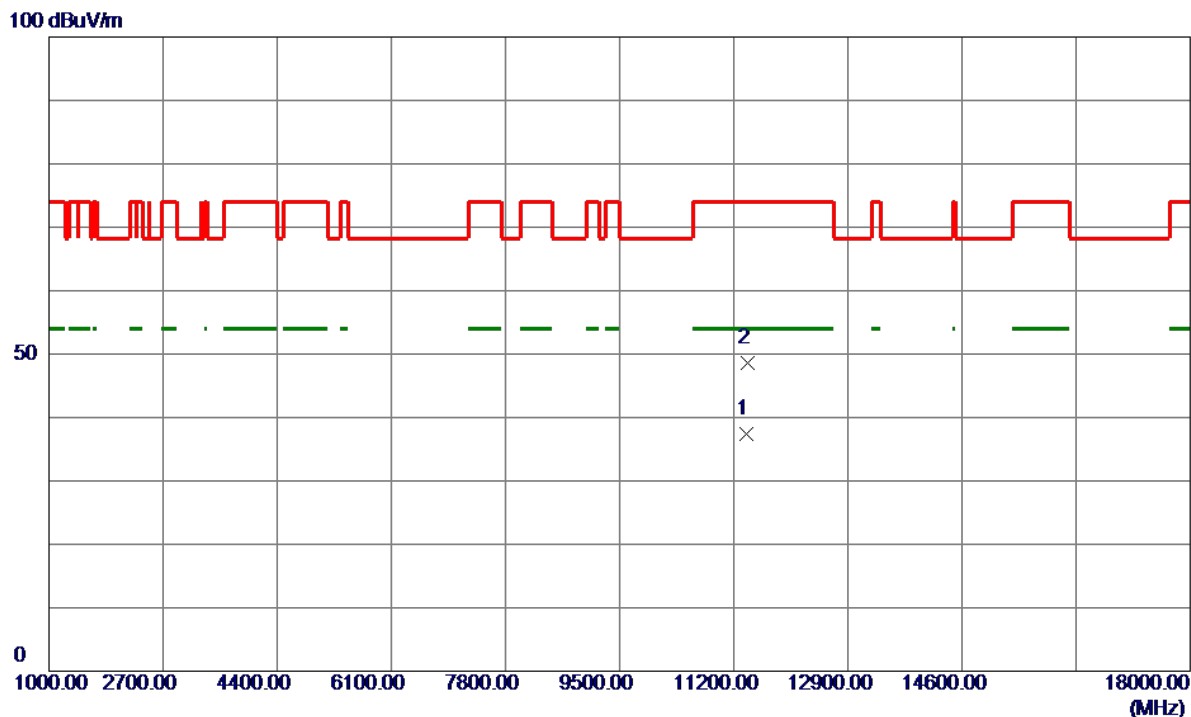


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11397.5250	25.12	12.28	37.40	54.00	-16.60	AVG	
2	11401.4650	36.24	12.28	48.52	74.00	-25.48	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

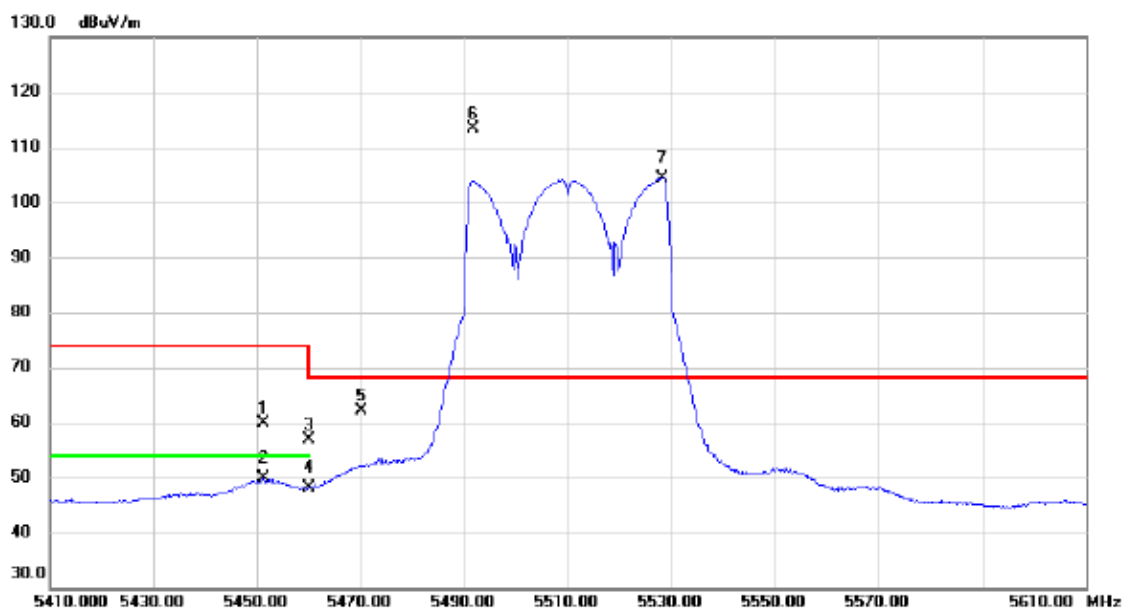


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5451.200	44.56	15.31	59.87	74.00	-14.13	peak	
2	5451.200	34.51	15.31	49.82	54.00	-4.18	AVG	
3	5460.000	41.52	15.34	56.86	74.00	-17.14	peak	
4	5460.000	32.71	15.34	48.05	54.00	-5.95	AVG	
5	5470.000	46.75	15.37	62.12	68.20	-6.08	peak	
6 *	5491.600	98.03	15.43	113.46	68.20	45.26	peak	No Limit
7 X	5528.400	88.87	15.54	104.41	68.20	36.21	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

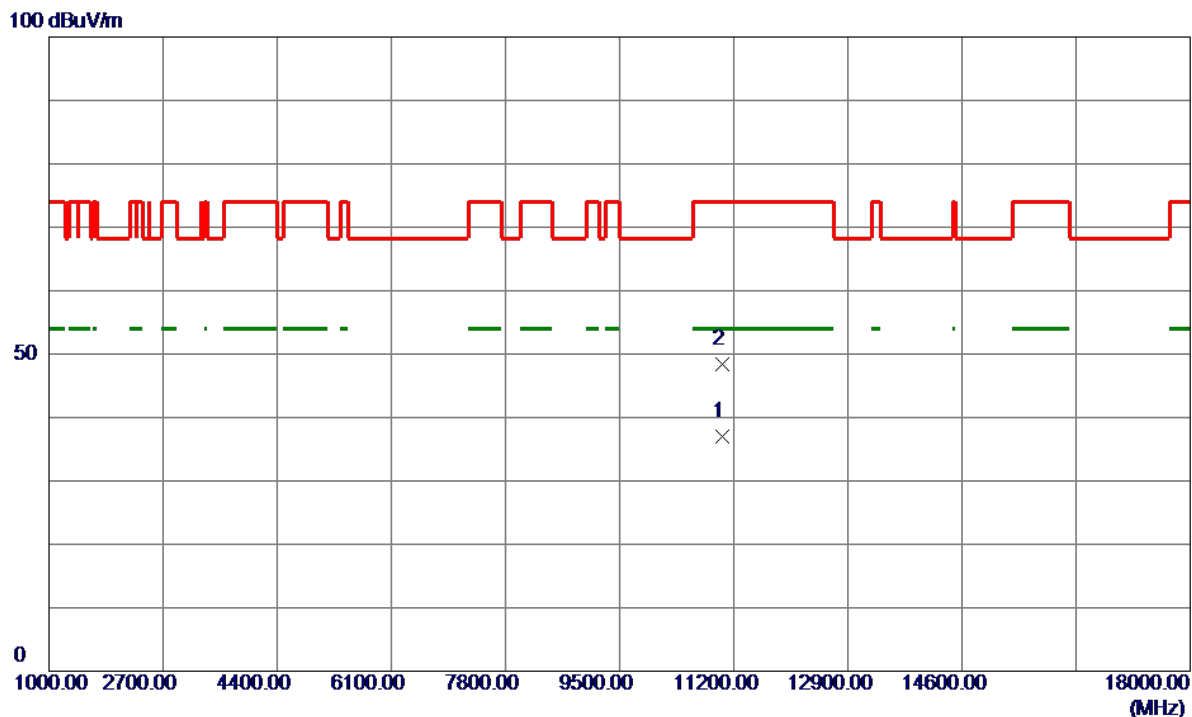


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11020.8350	25.27	11.79	37.06	54.00	-16.94	AVG	
2	11022.4600	36.56	11.79	48.35	74.00	-25.65	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

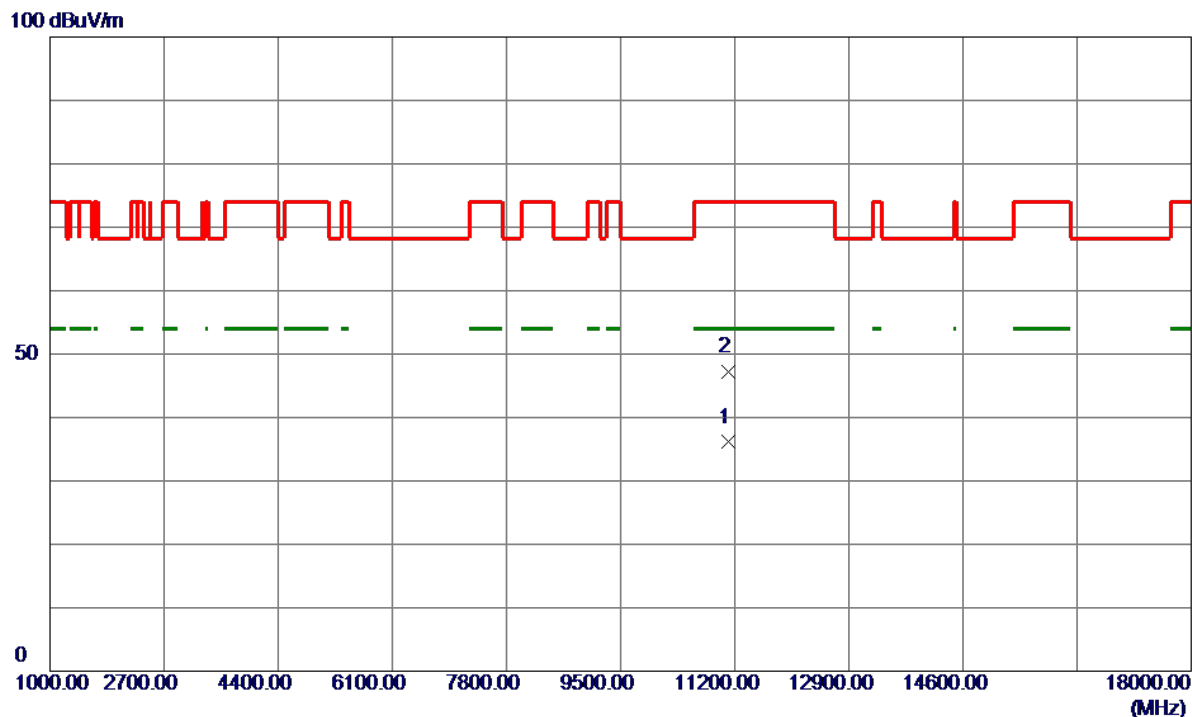


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11100.3150	24.21	11.89	36.10	54.00	-17.90	AVG	
2	11100.5050	35.22	11.89	47.11	74.00	-26.89	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

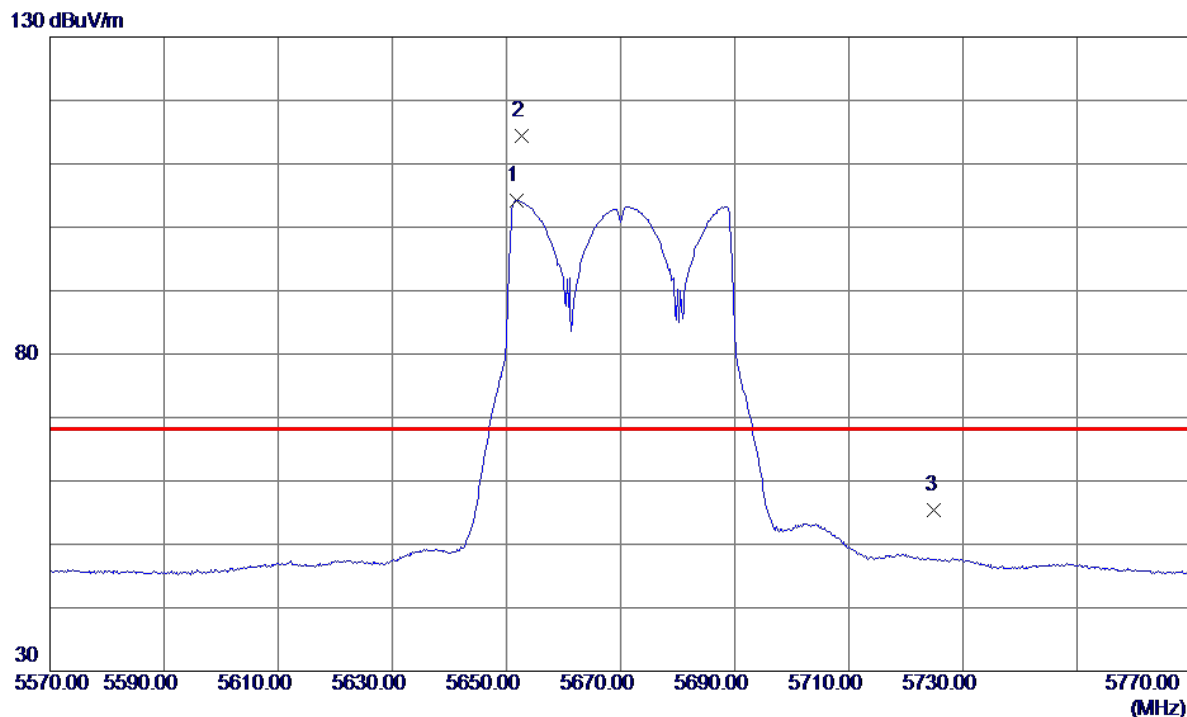


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5651.8000	88.29	15.97	104.26	999.00	-894.74	AVG	No Limit
2 *	5652.6000	98.51	15.98	114.49	68.20	46.29	Peak	No Limit
3	5725.0000	39.25	16.22	55.47	68.20	-12.73	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

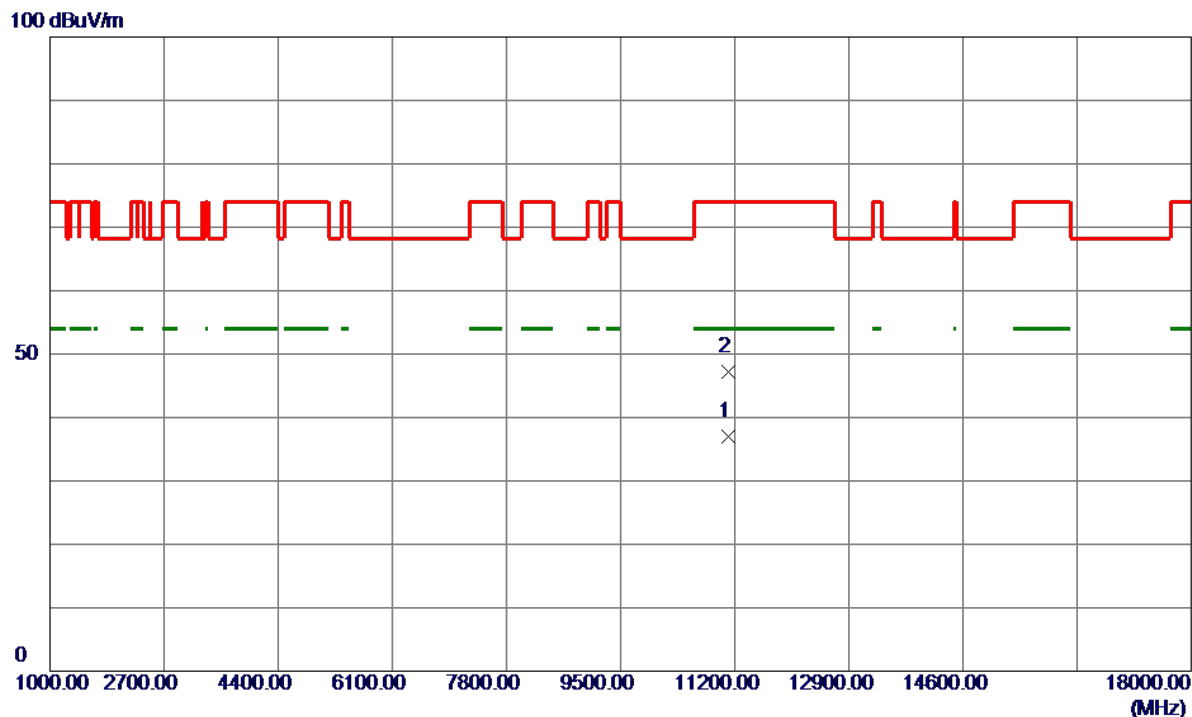


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11100.3500	25.06	11.89	36.95	54.00	-17.05	AVG	
2	11098.5700	35.24	11.89	47.13	74.00	-26.87	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

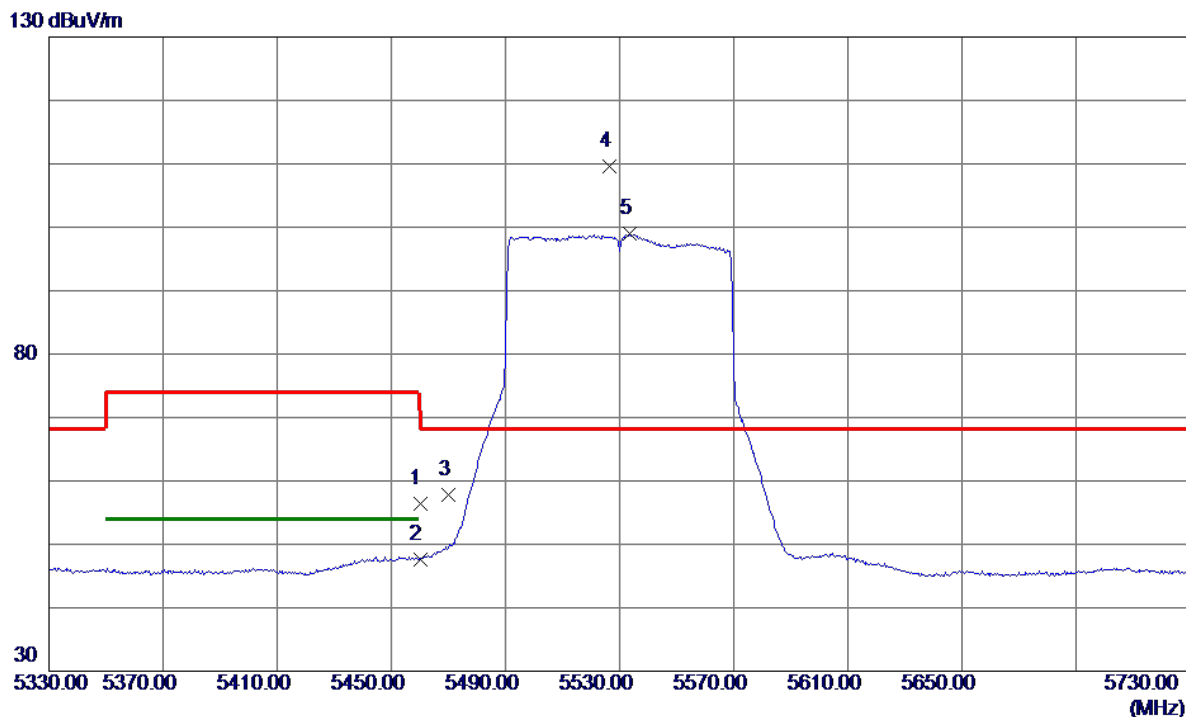


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	41.03	15.34	56.37	74.00	-17.63	Peak	
2	5460.0000	32.25	15.34	47.59	54.00	-6.41	AVG	
3	5470.0000	42.39	15.37	57.76	68.20	-10.44	Peak	
4 *	5526.4000	94.02	15.54	109.56	68.20	41.36	Peak	No Limit
5	5533.6000	83.42	15.57	98.99	999.00	-900.01	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

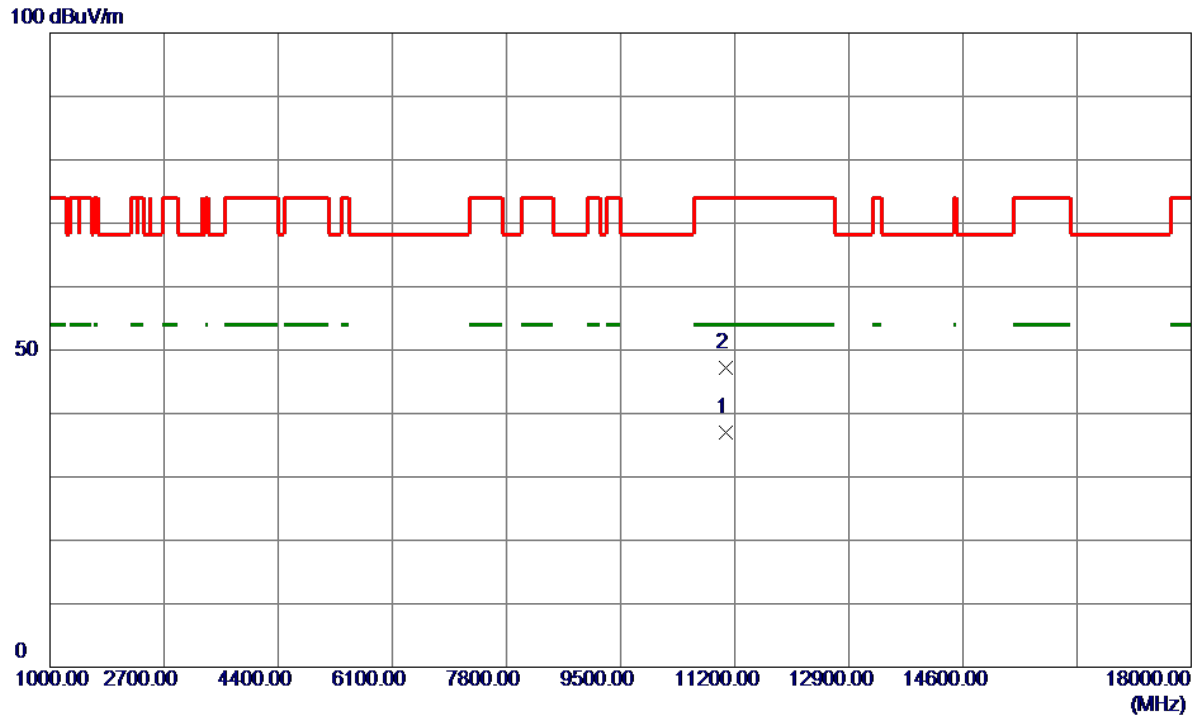


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11060.0000	25.10	11.84	36.94	54.00	-17.06	AVG	
2	11060.0000	35.35	11.84	47.19	74.00	-26.81	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

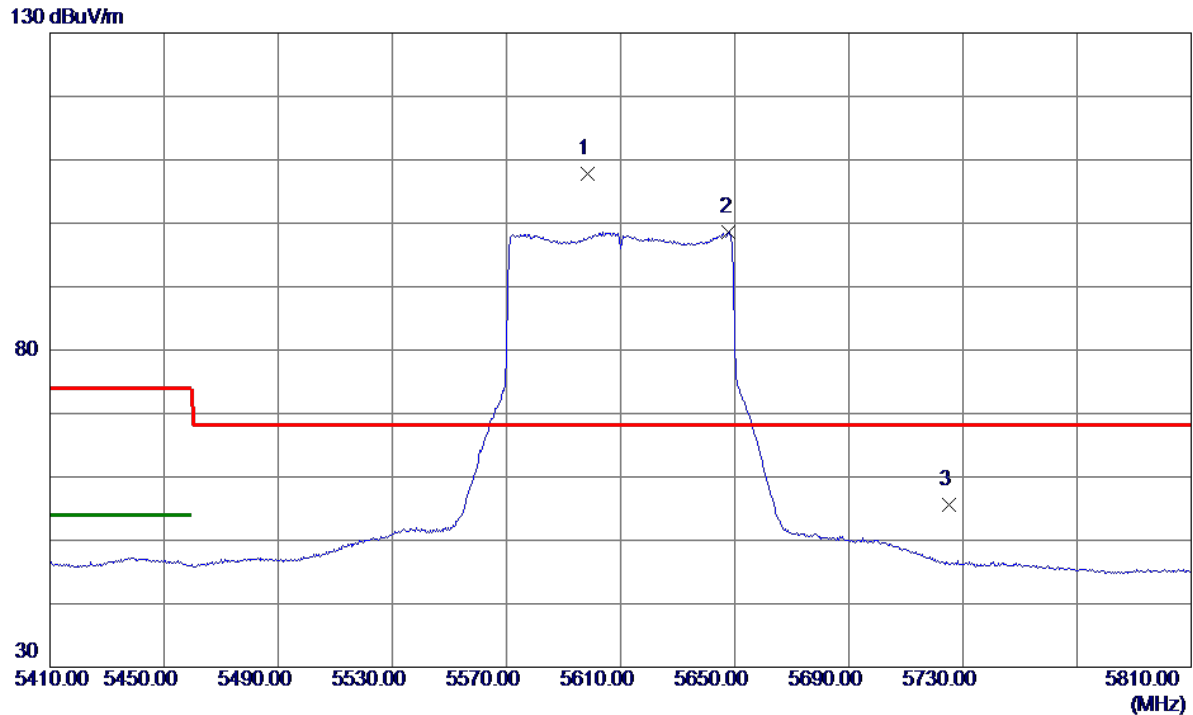


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5598.4000	92.06	15.79	107.85	68.20	39.65	Peak	No Limit
2	5648.0000	82.70	15.96	98.66	999.00	-900.34	AVG	No Limit
3	5725.0000	39.31	16.22	55.53	68.20	-12.67	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

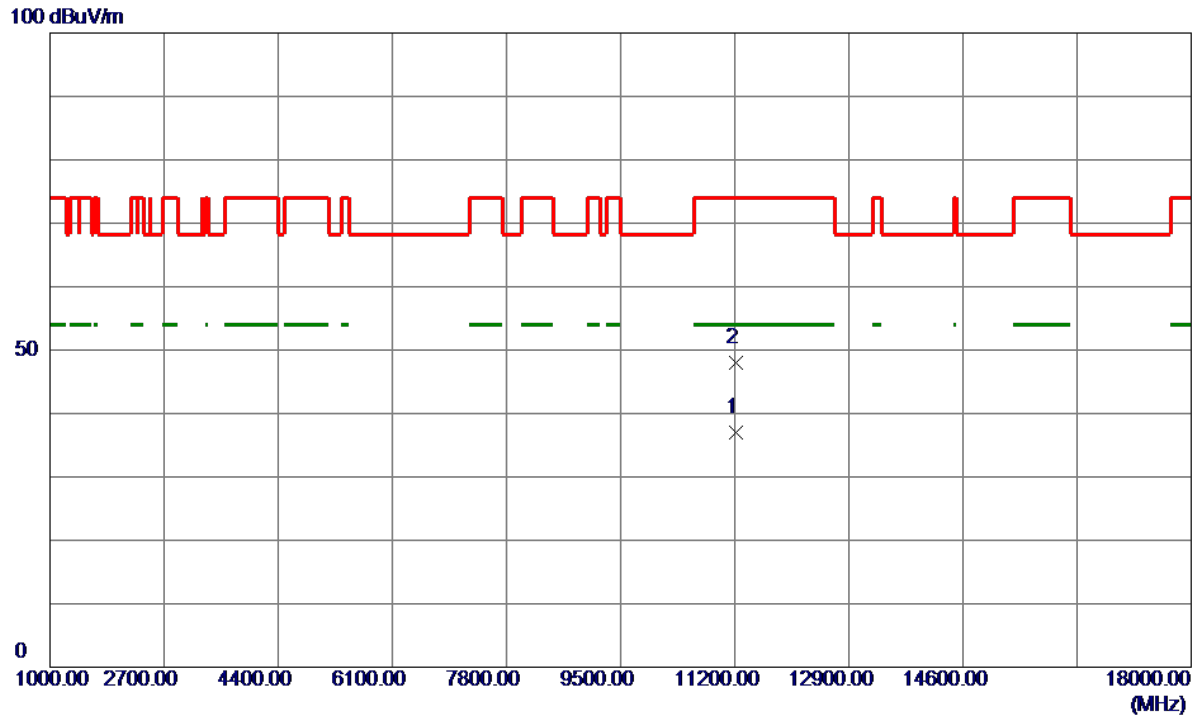


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11219.2750	24.93	12.04	36.97	54.00	-17.03	AVG	
2	11218.2450	35.90	12.04	47.94	74.00	-26.06	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

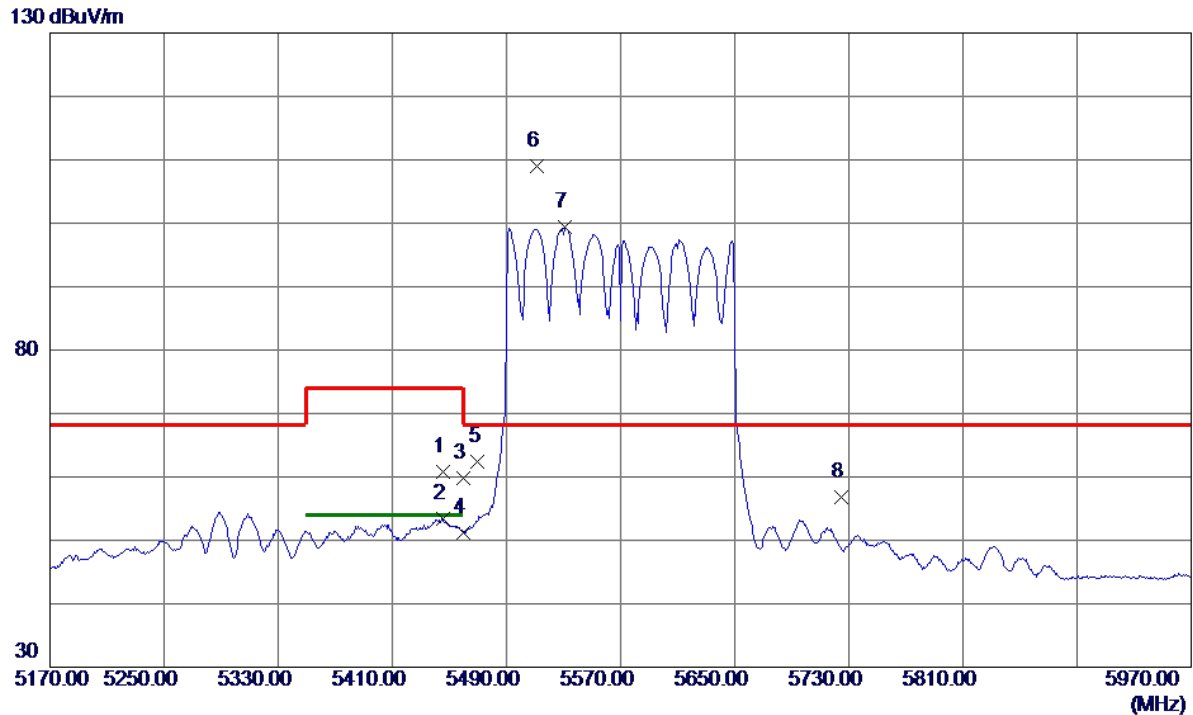


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5445.2000	45.49	15.30	60.79	74.00	-13.21	Peak	
2	5445.2000	38.09	15.30	53.39	54.00	-0.61	AVG	
3	5460.0000	44.45	15.34	59.79	74.00	-14.21	Peak	
4	5460.0000	35.91	15.34	51.25	54.00	-2.75	AVG	
5	5470.0000	47.06	15.37	62.43	68.20	-5.77	Peak	
6 *	5511.6000	93.43	15.49	108.92	68.20	40.72	Peak	No Limit
7	5530.8000	83.85	15.56	99.41	999.00	-899.59	AVG	No Limit
8	5725.0000	40.56	16.22	56.78	68.20	-11.42	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

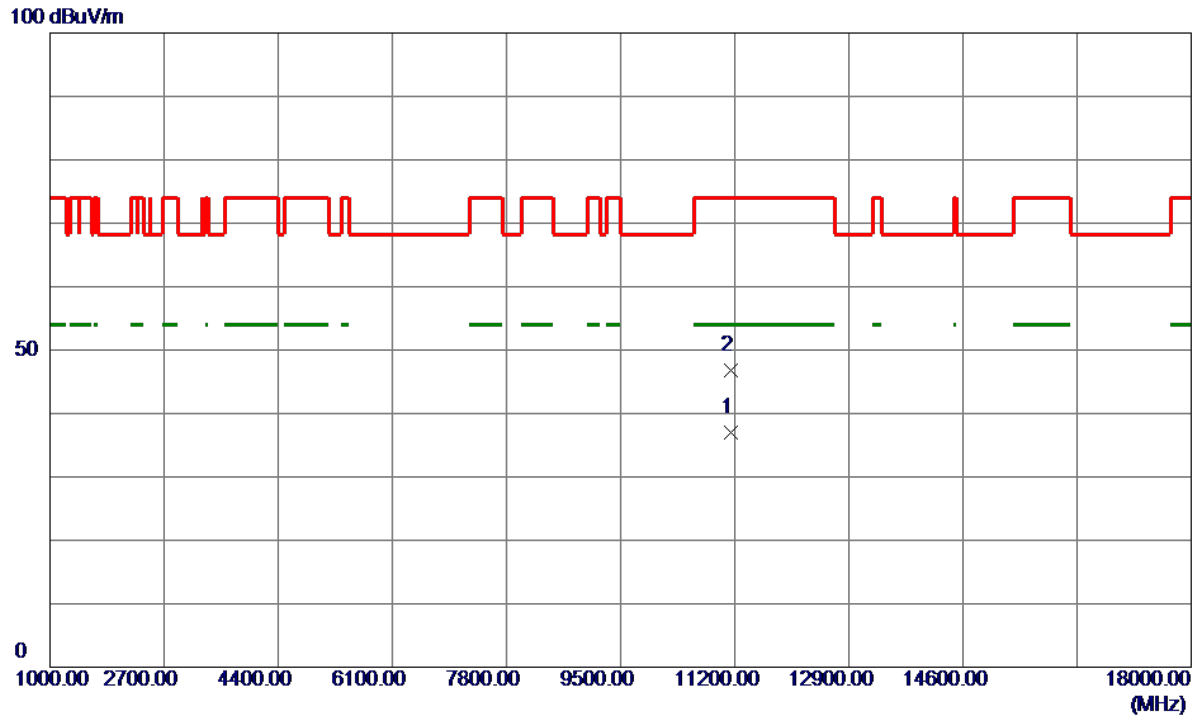


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11140.4050	25.03	11.94	36.97	54.00	-17.03	AVG	
2	11138.5250	34.80	11.94	46.74	74.00	-27.26	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

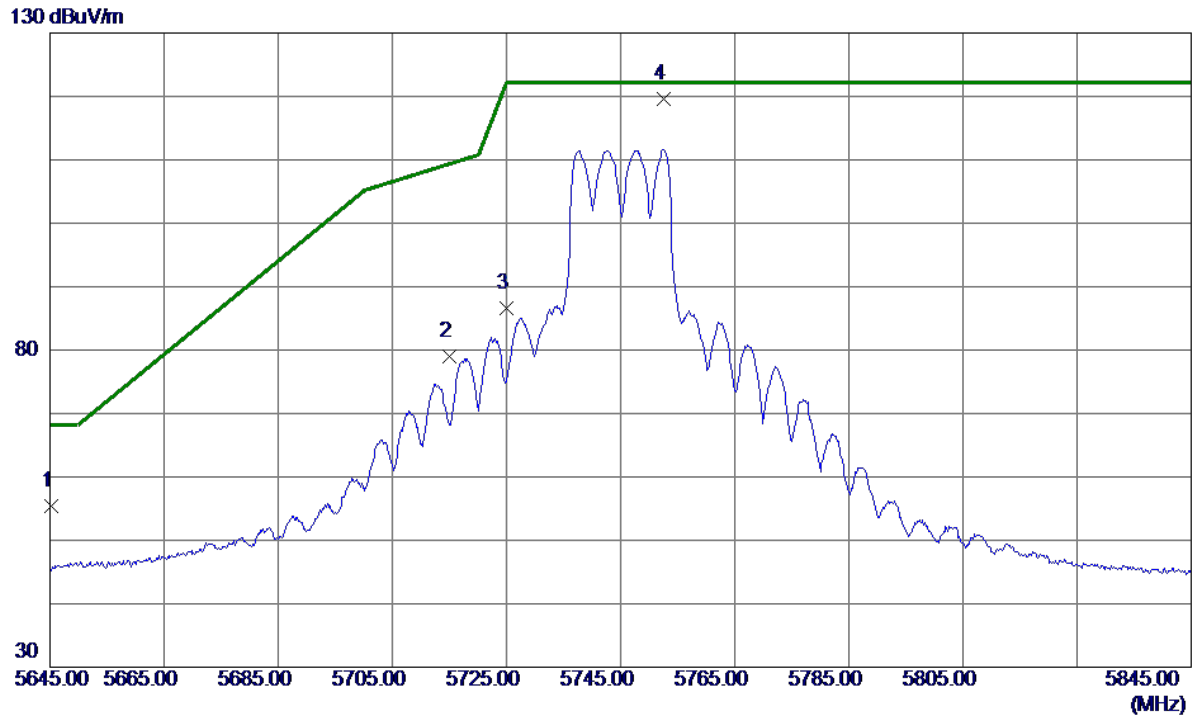


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5645.2000	39.44	15.95	55.39	68.20	-12.81	Peak	
2	5715.0000	62.89	16.19	79.08	109.40	-30.32	Peak	
3	5725.0000	70.37	16.22	86.59	122.20	-35.61	Peak	
4 *	5752.6000	103.20	16.32	119.52	122.20	-2.68	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

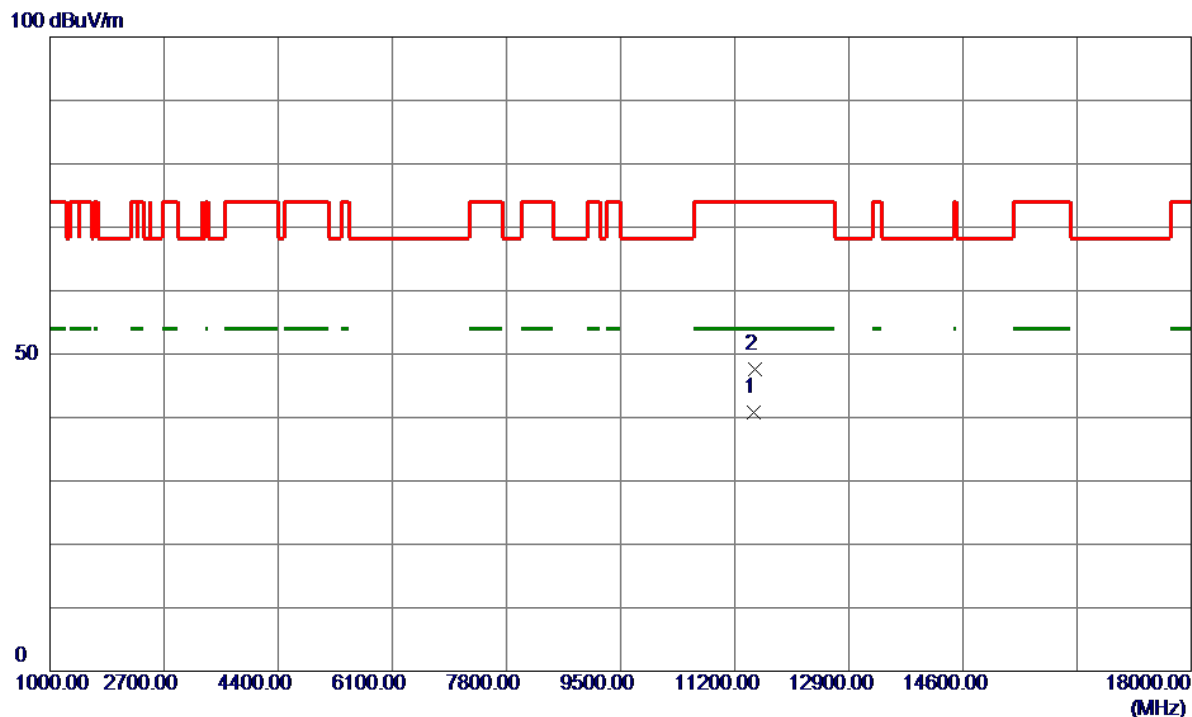


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11492.3400	28.49	12.40	40.89	54.00	-13.11	AVG	
2	11493.8200	35.12	12.40	47.52	74.00	-26.48	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

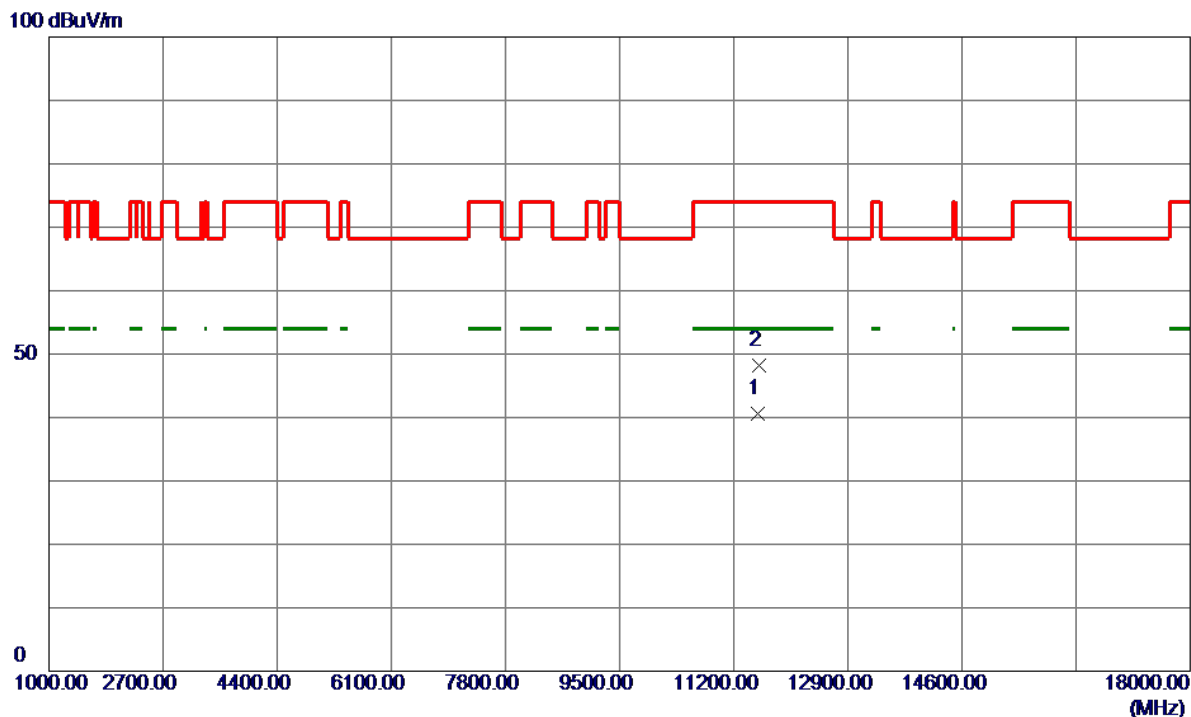


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11567.7100	28.17	12.34	40.51	54.00	-13.49	AVG	
2	11570.3500	35.87	12.34	48.21	74.00	-25.79	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

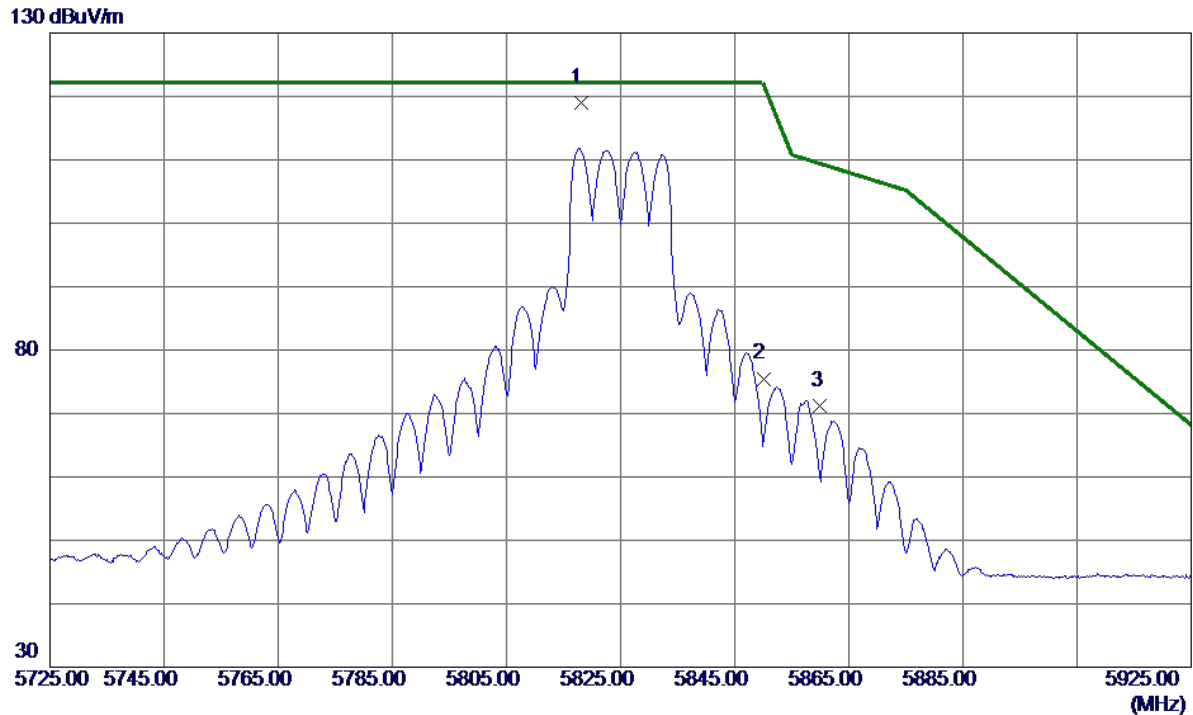


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5818.0000	102.48	16.54	119.02	122.20	-3.18	Peak	No Limit
2	5850.0000	58.85	16.65	75.50	122.20	-46.70	Peak	
3	5860.0000	54.59	16.68	71.27	109.40	-38.13	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

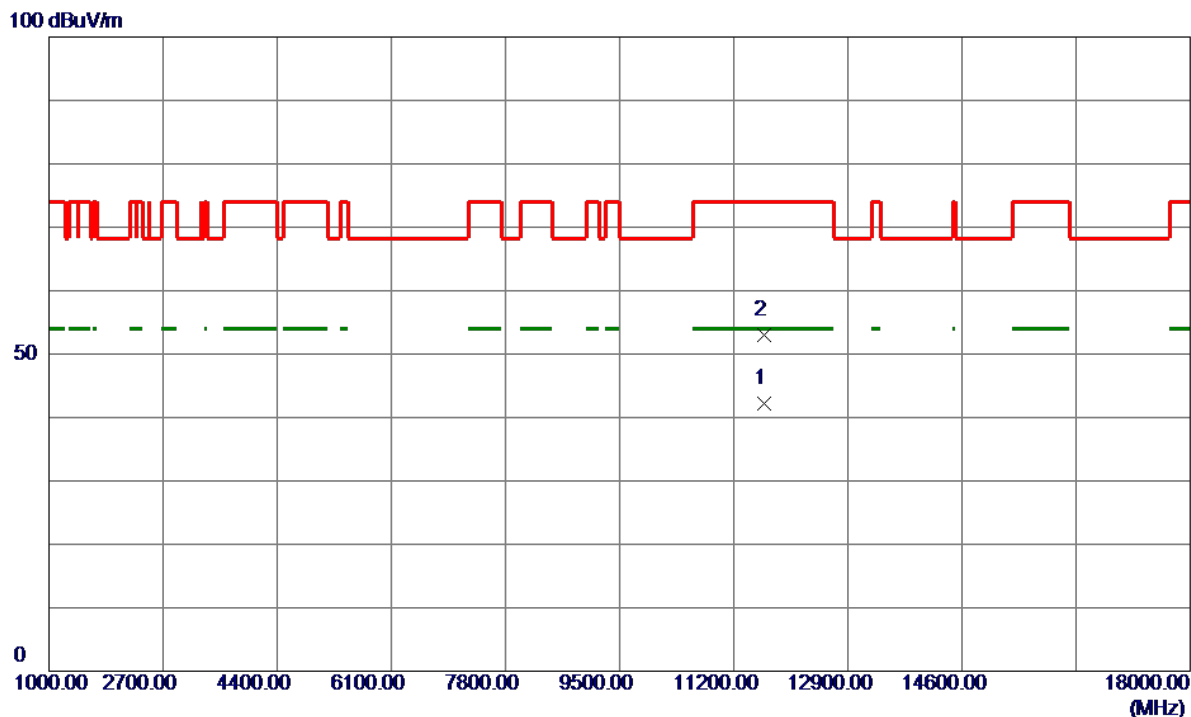


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11651.5800	30.01	12.25	42.26	54.00	-11.74	AVG	
2	11651.5400	40.76	12.25	53.01	74.00	-20.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

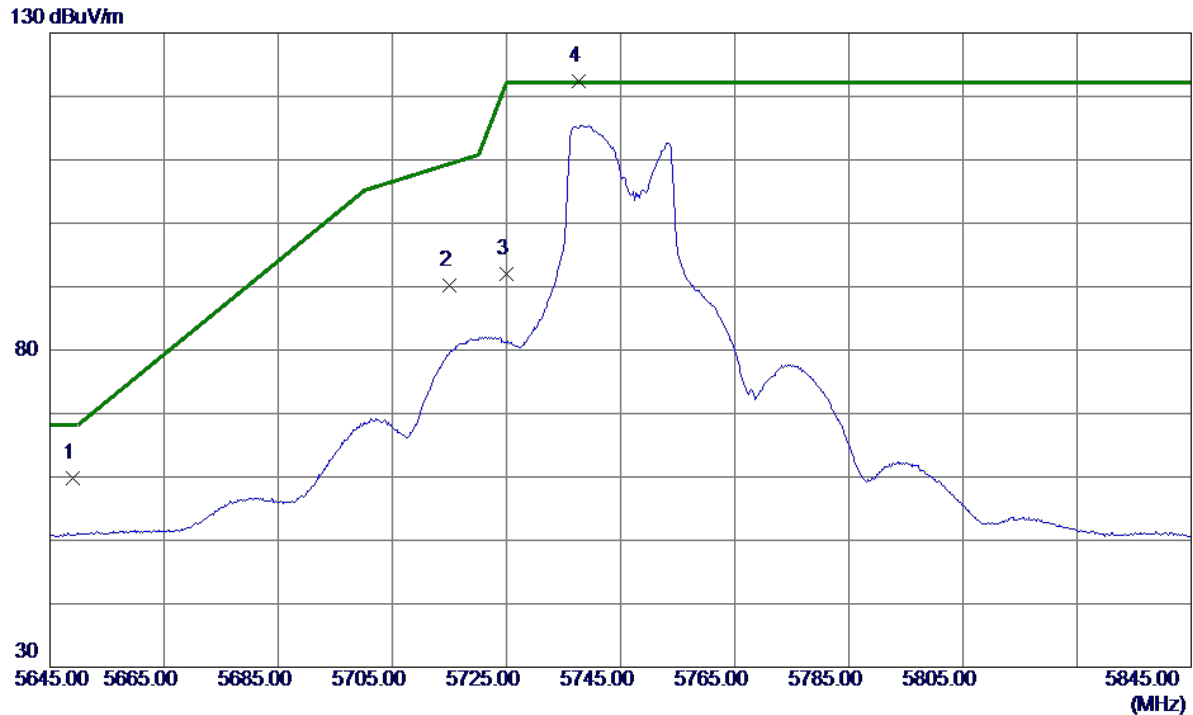


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5649.0000	43.79	15.96	59.75	68.20	-8.45	Peak	
2	5715.0000	74.04	16.19	90.23	109.40	-19.17	Peak	
3	5725.0000	75.76	16.22	91.98	122.20	-30.22	Peak	
4 *	5737.6000	106.21	16.27	122.48	122.20	0.28	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

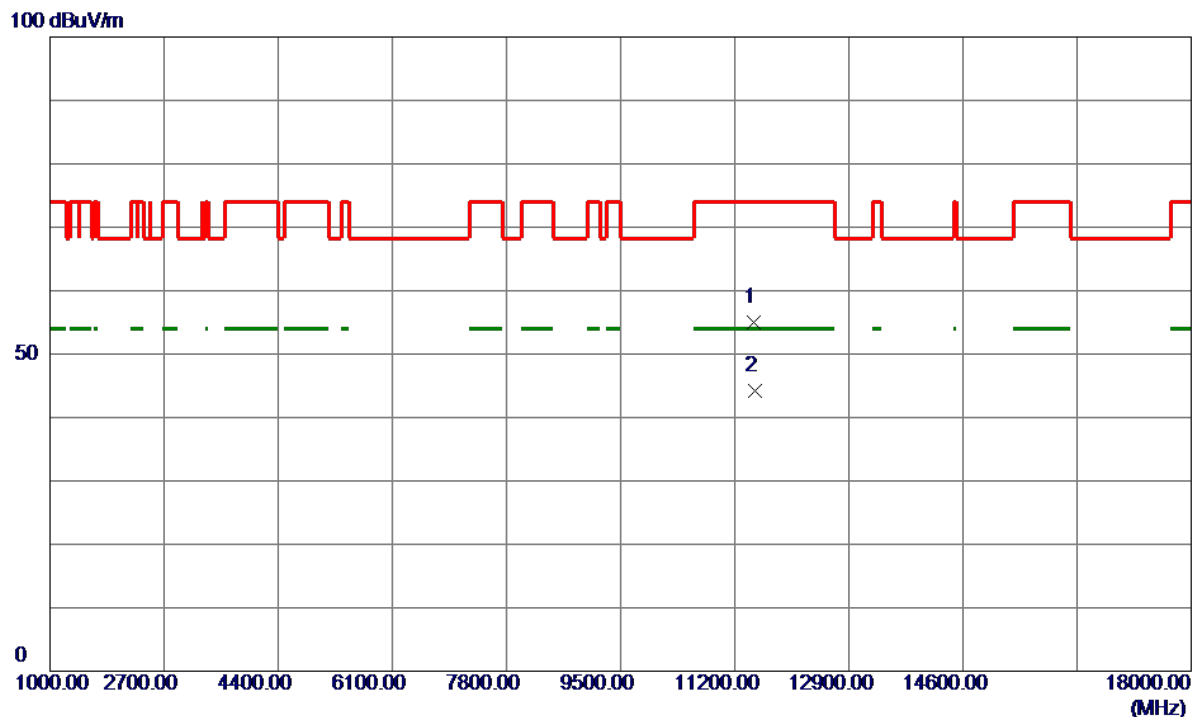


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11492.4500	42.62	12.40	55.02	74.00	-18.98	Peak	
2 *	11493.8000	31.76	12.40	44.16	54.00	-9.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

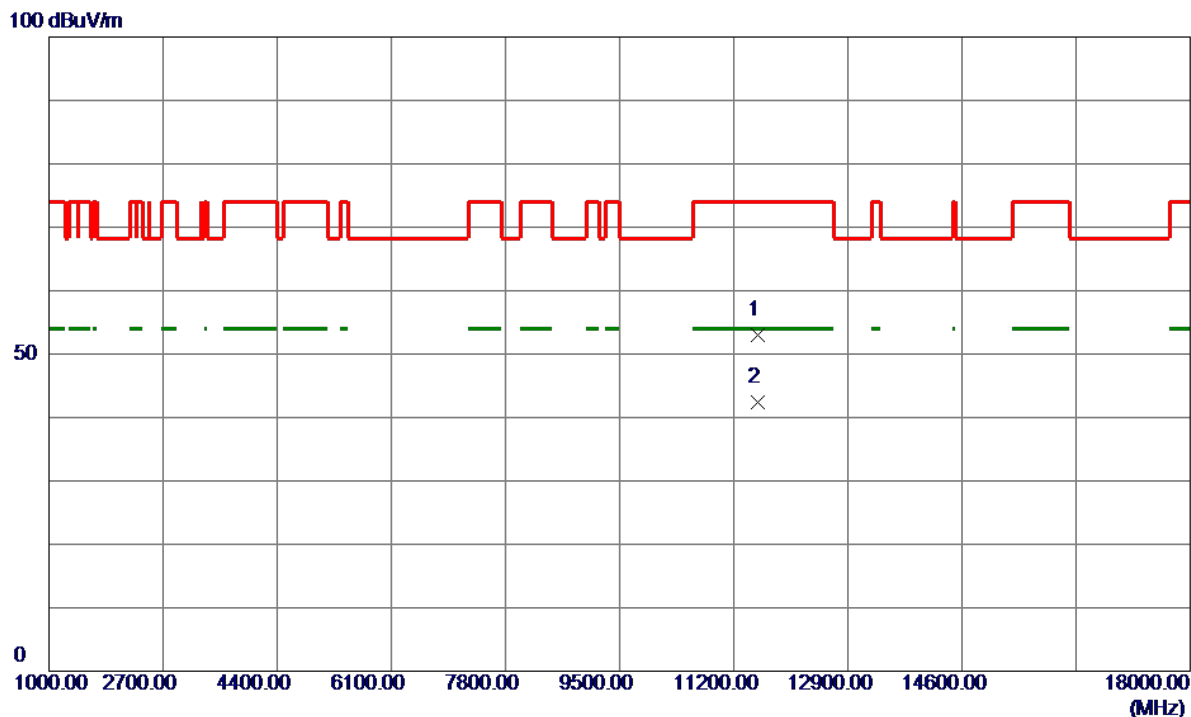


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11566.6000	40.74	12.34	53.08	74.00	-20.92	Peak	
2 *	11568.0500	30.02	12.34	42.36	54.00	-11.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

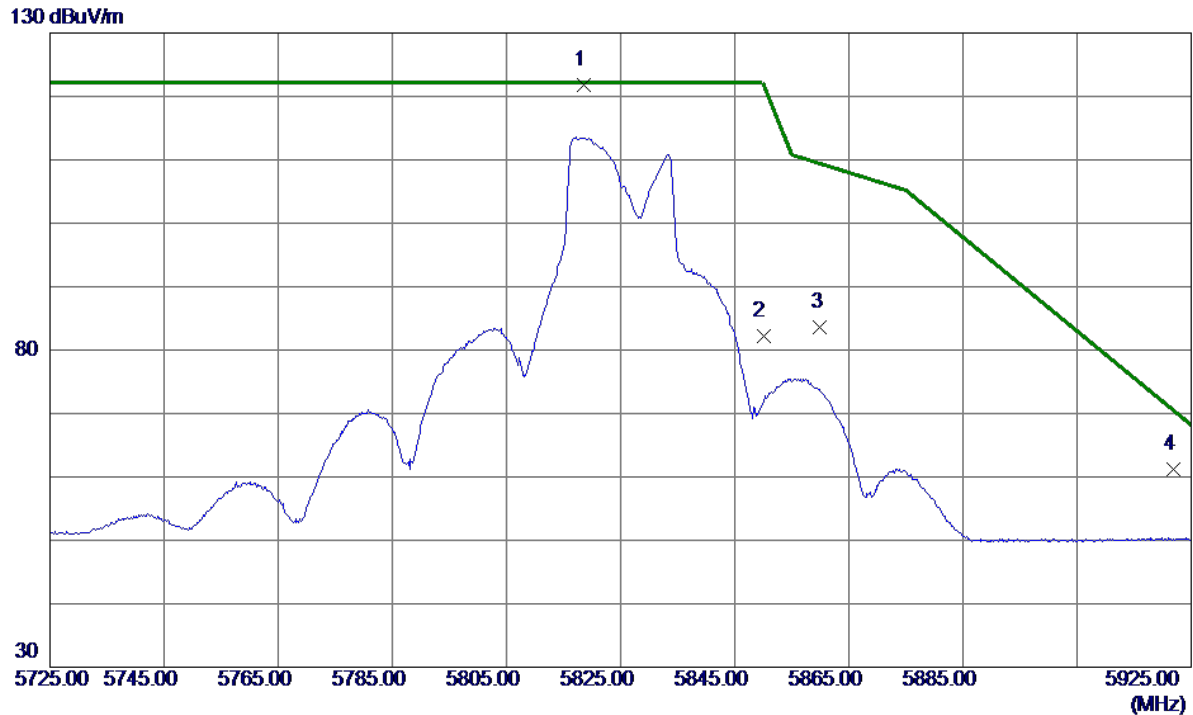


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5818.6000	105.16	16.54	121.70	122.20	-0.50	Peak	No Limit
2	5850.0000	65.58	16.65	82.23	122.20	-39.97	Peak	
3	5860.0000	67.01	16.68	83.69	109.40	-25.71	Peak	
4	5921.8000	44.22	16.89	61.11	70.57	-9.46	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

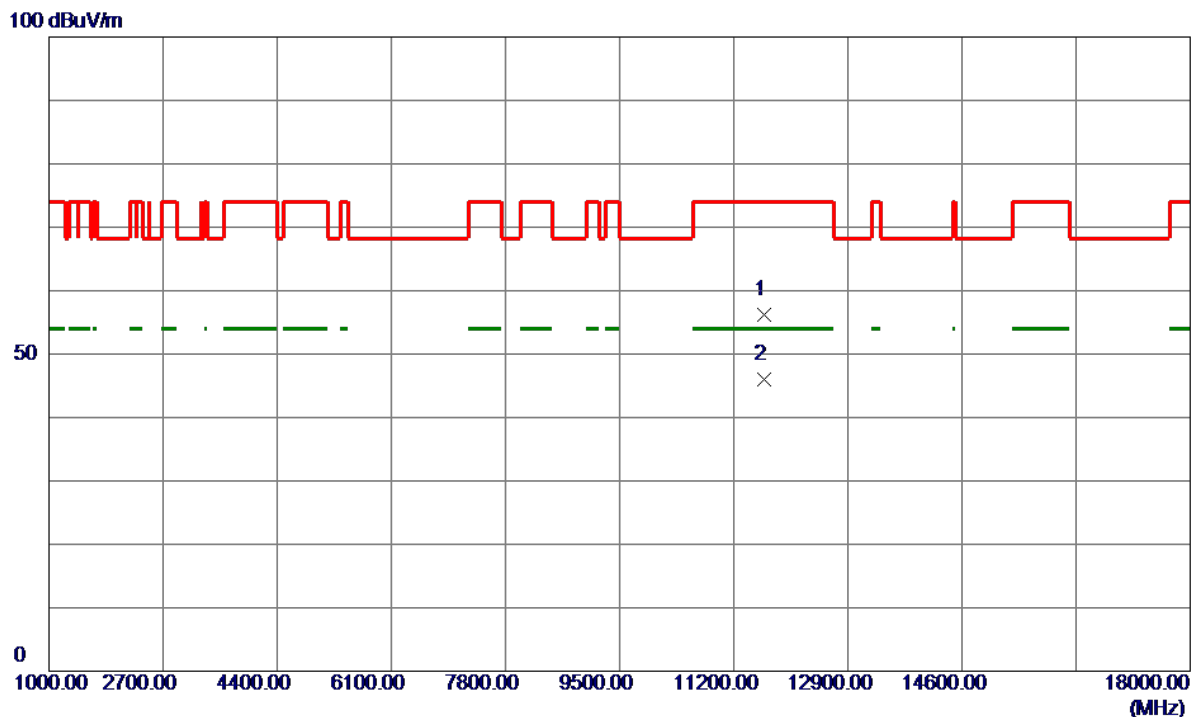


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11649.6000	44.00	12.25	56.25	74.00	-17.75	Peak	
2 *	11649.9500	33.72	12.25	45.97	54.00	-8.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

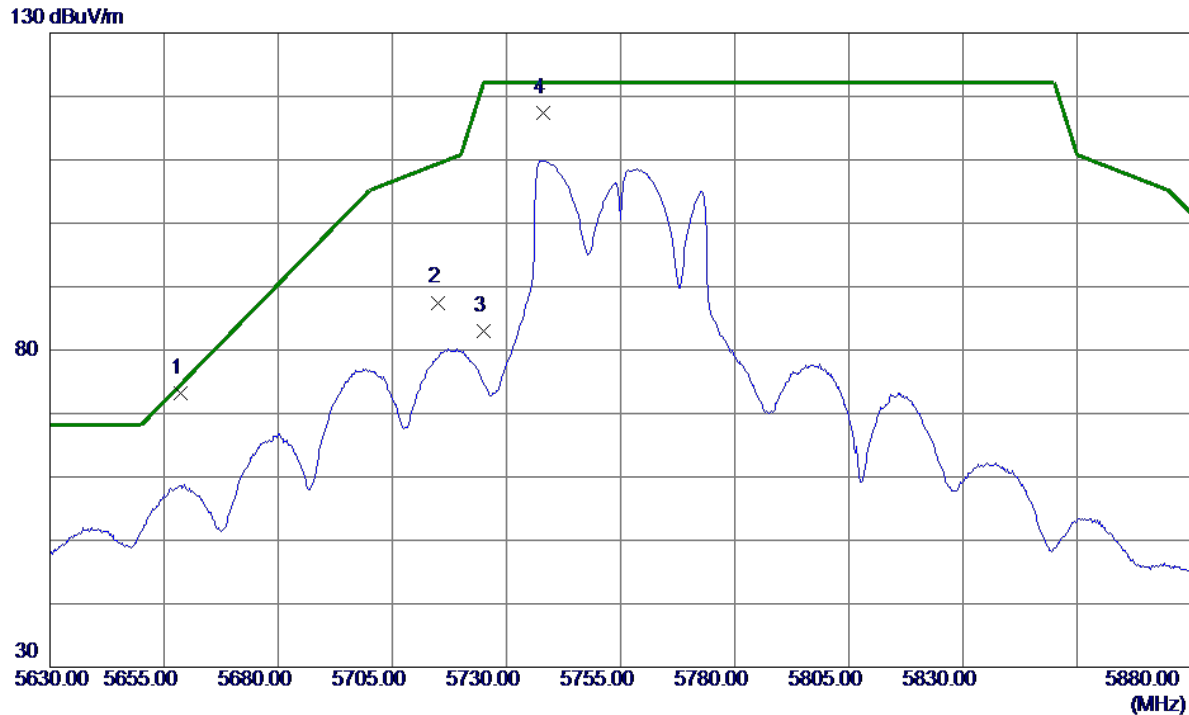


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5658.5000	57.15	16.00	73.15	74.49	-1.34	Peak	
2	5715.0000	71.31	16.19	87.50	109.40	-21.90	Peak	
3	5725.0000	66.82	16.22	83.04	122.20	-39.16	Peak	
4	5738.0000	101.04	16.27	117.31	122.20	-4.89	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

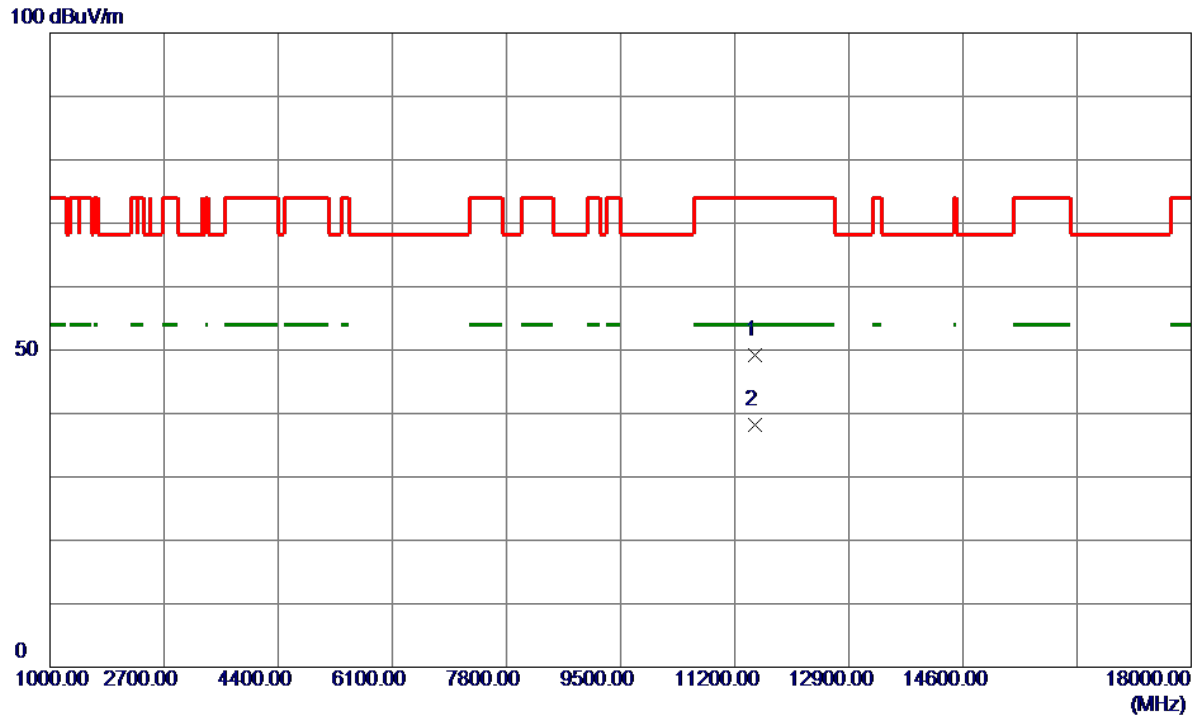


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11507.5950	36.84	12.40	49.24	74.00	-24.76	Peak	
2 *	11509.7500	25.88	12.40	38.28	54.00	-15.72	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

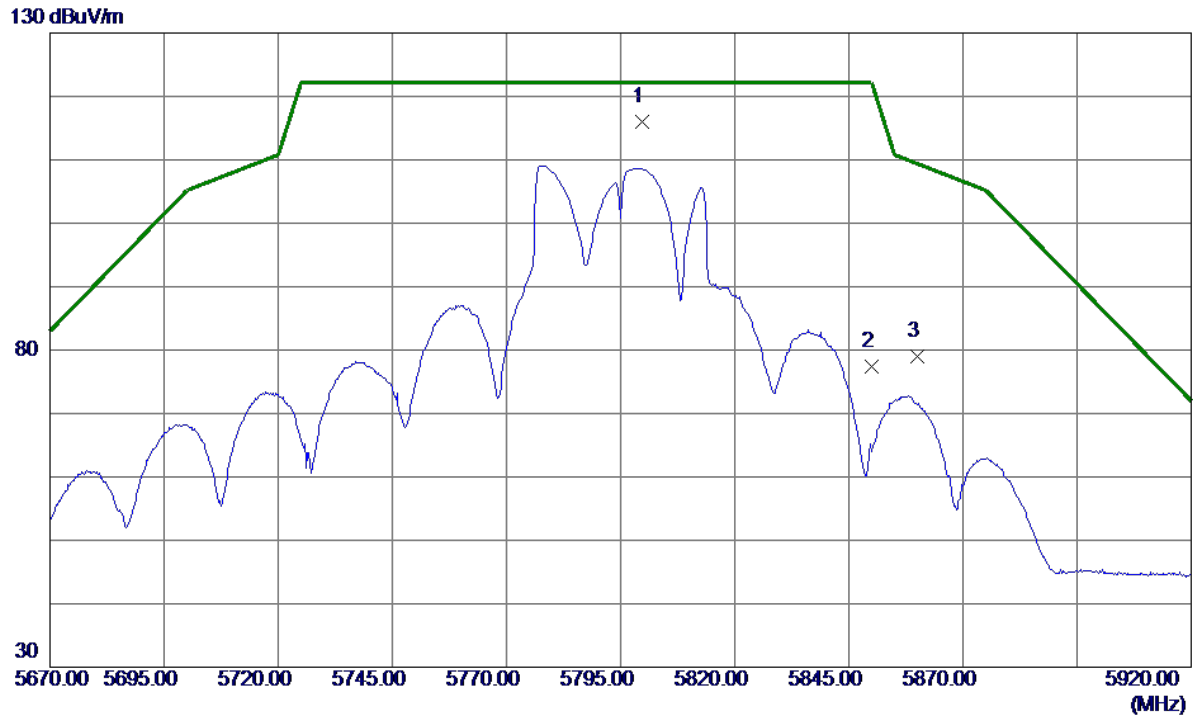


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5799.7500	99.56	16.48	116.04	122.20	-6.16	Peak	No Limit
2	5850.0000	60.73	16.65	77.38	122.20	-44.82	Peak	
3	5860.0000	62.30	16.68	78.98	109.40	-30.42	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

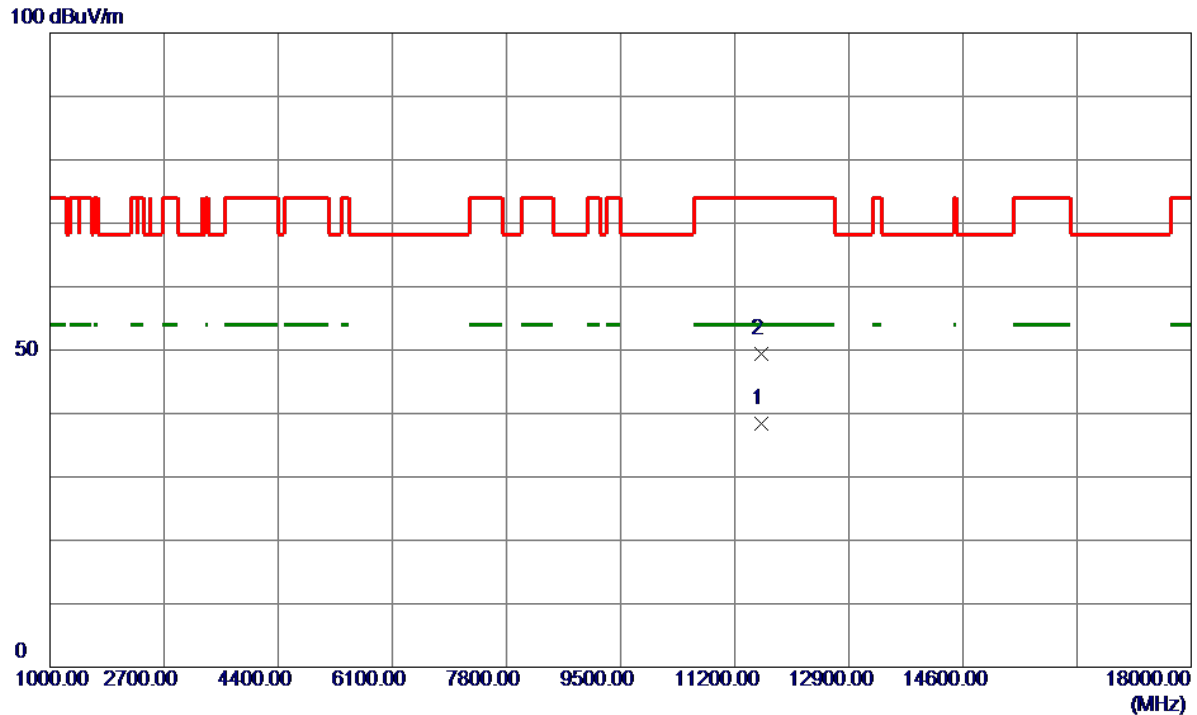


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11589.9349	26.13	12.32	38.45	54.00	-15.55	AVG	
2	11588.3200	36.99	12.32	49.31	74.00	-24.69	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

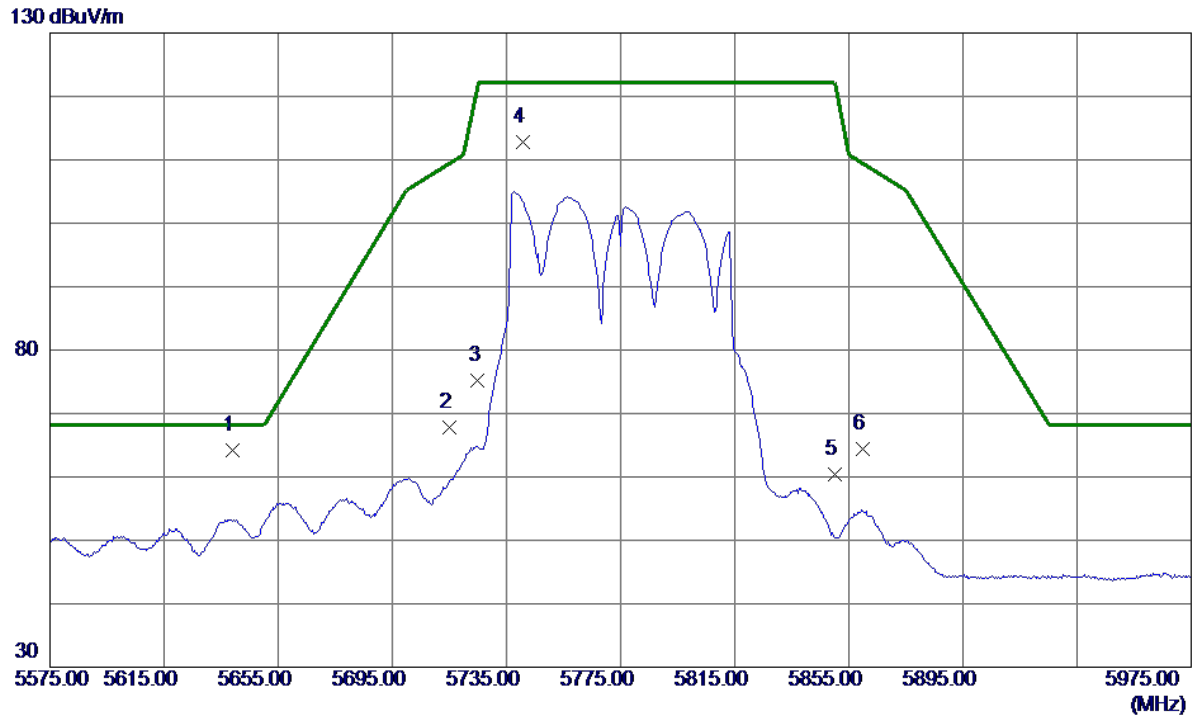


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5639.0000	48.30	15.93	64.23	68.20	-3.97	Peak	
2	5715.0000	51.69	16.19	67.88	109.40	-41.52	Peak	
3	5725.0000	59.06	16.22	75.28	122.20	-46.92	Peak	
4	5740.6000	96.50	16.28	112.78	122.20	-9.42	Peak	No Limit
5	5850.0000	43.79	16.65	60.44	122.20	-61.76	Peak	
6	5860.0000	47.66	16.68	64.34	109.40	-45.06	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

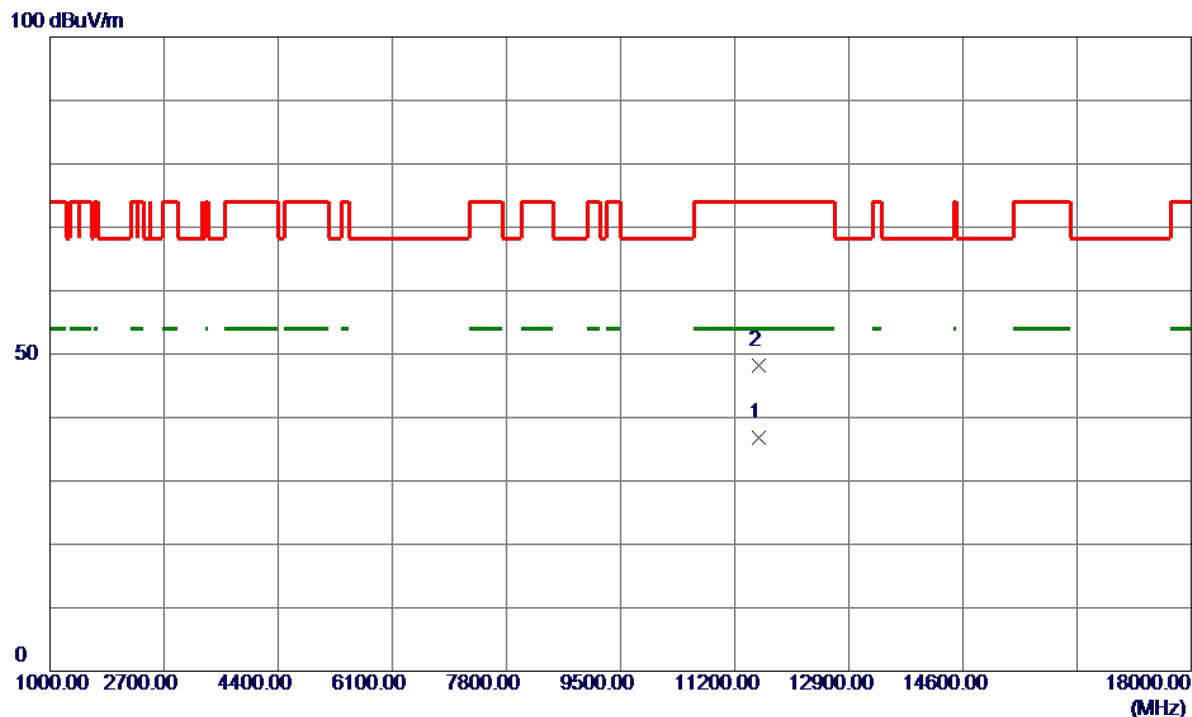


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11550.0000	24.47	12.36	36.83	54.00	-17.17	AVG	
2	11550.0000	35.77	12.36	48.13	74.00	-25.87	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

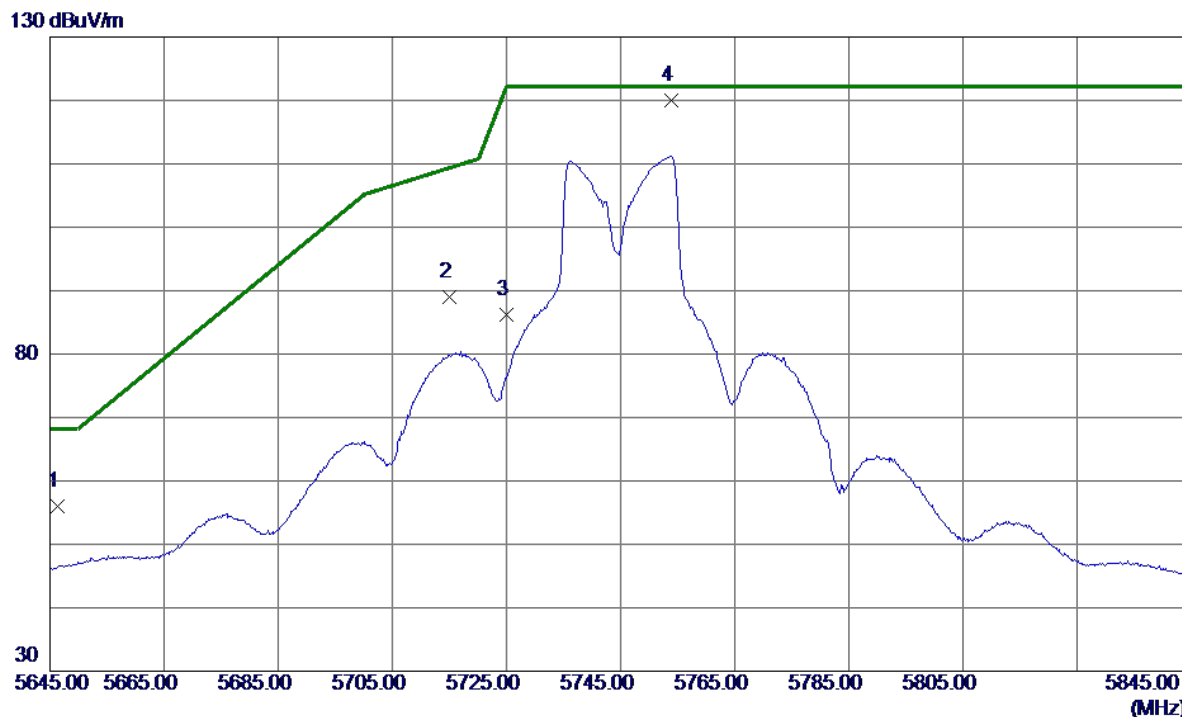


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5646.4000	40.06	15.95	56.01	68.20	-12.19	Peak	
2	5715.0000	72.81	16.19	89.00	109.40	-20.40	Peak	
3	5725.0000	69.95	16.22	86.17	122.20	-36.03	Peak	
4 *	5753.8000	103.76	16.32	120.08	122.20	-2.12	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

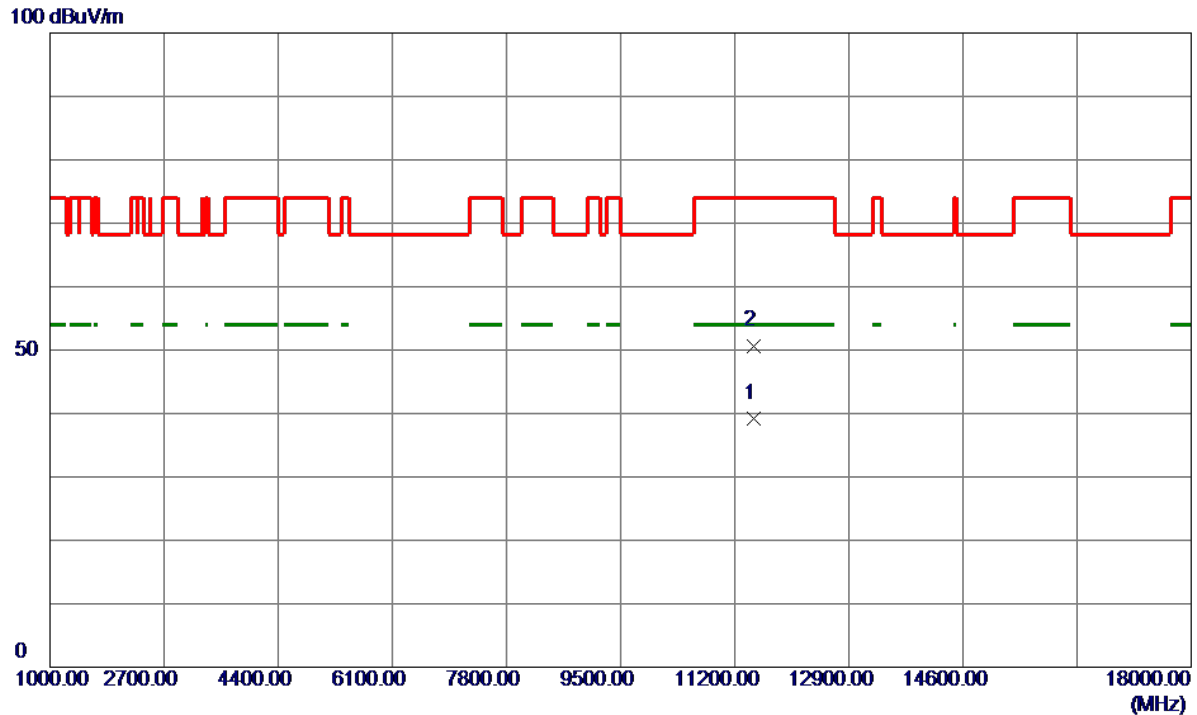


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11487.6550	26.88	12.39	39.27	54.00	-14.73	AVG	
2	11487.5100	38.31	12.39	50.70	74.00	-23.30	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

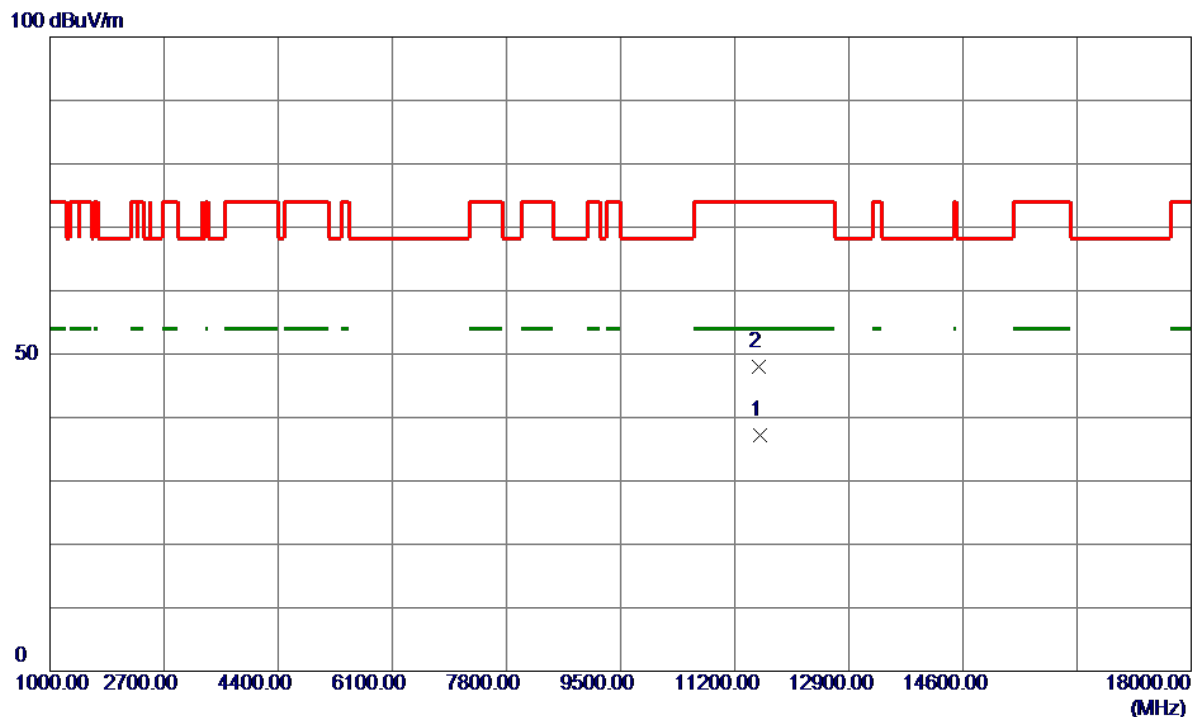


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.2100	24.92	12.34	37.26	54.00	-16.74	AVG	
2	11568.1849	35.67	12.34	48.01	74.00	-25.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

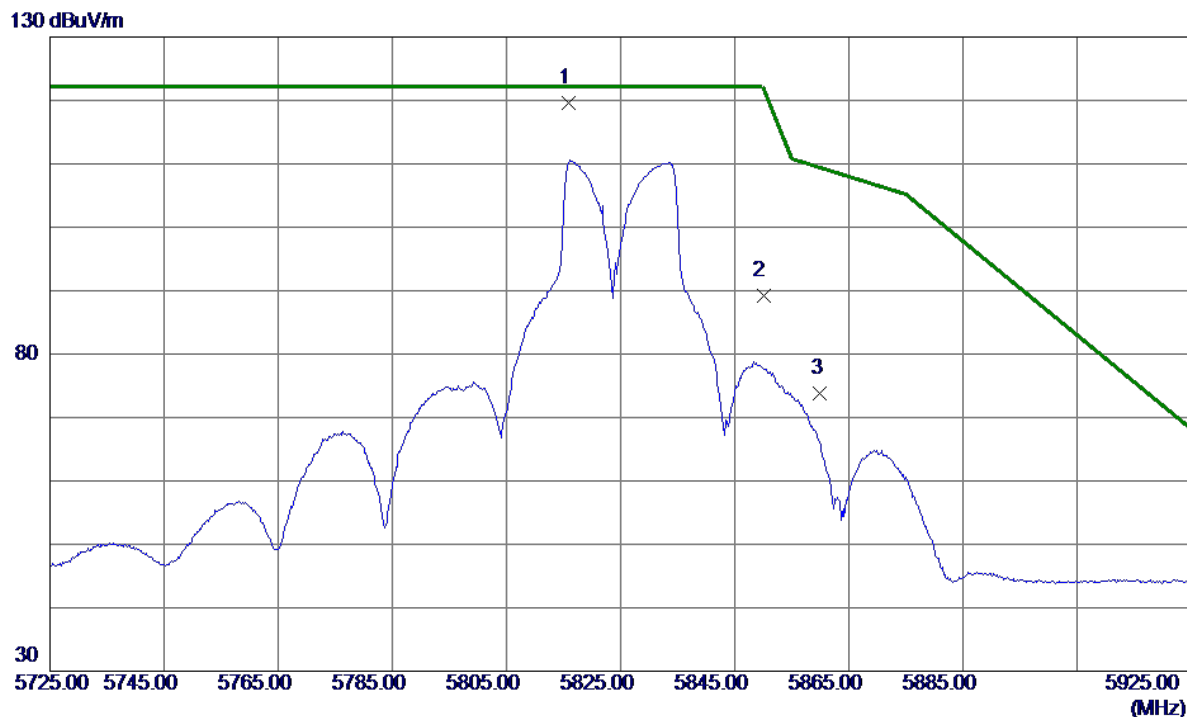


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5815.8000	103.14	16.53	119.67	122.20	-2.53	Peak	No Limit
2	5850.0000	72.46	16.65	89.11	122.20	-33.09	Peak	
3	5860.0000	57.19	16.68	73.87	109.40	-35.53	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

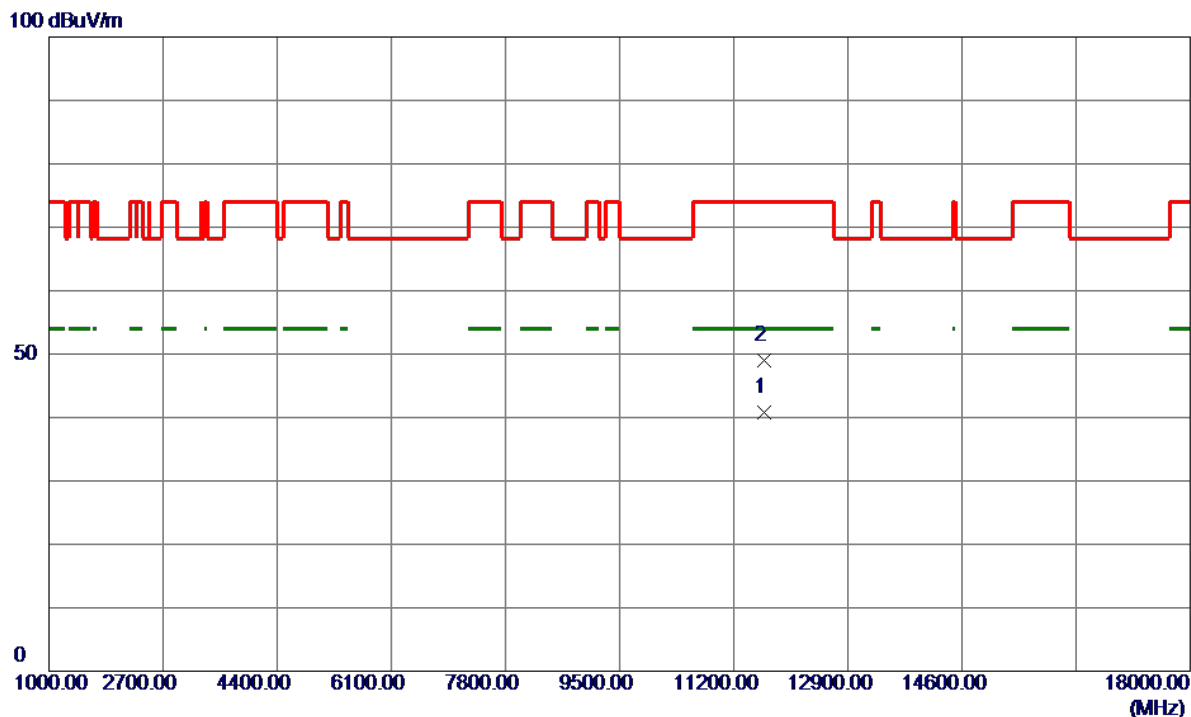


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11652.5000	28.55	12.25	40.80	54.00	-13.20	AVG	
2	11648.6600	36.75	12.26	49.01	74.00	-24.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

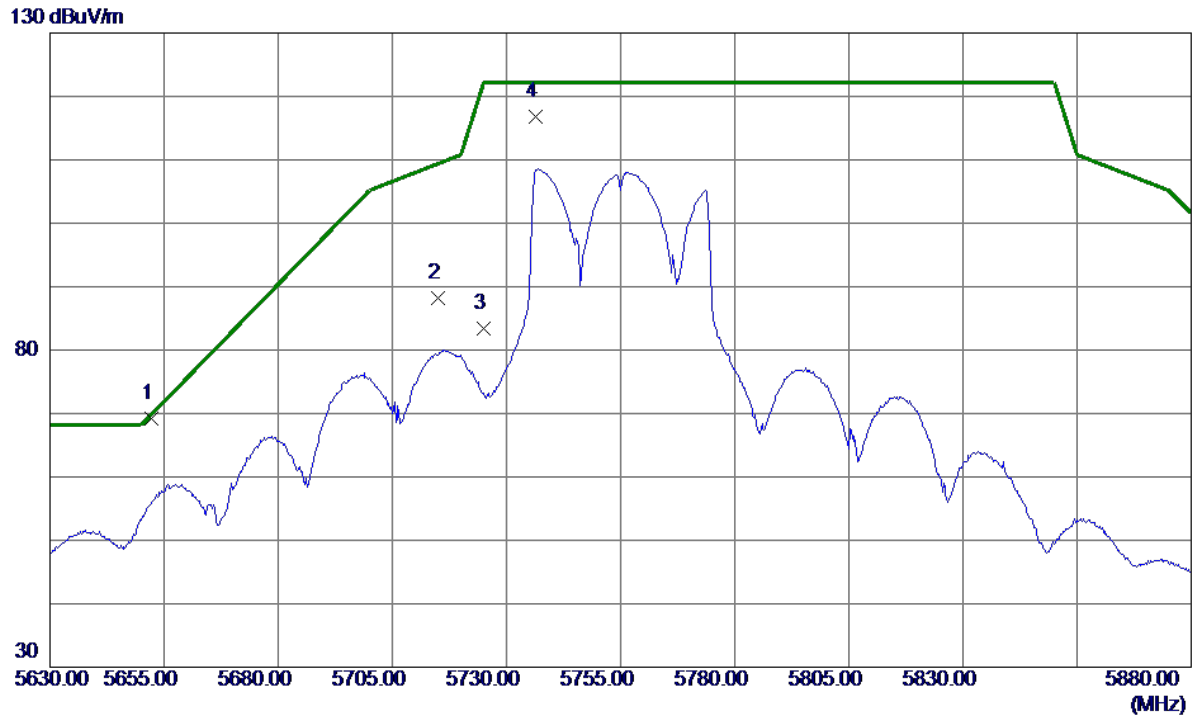


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5652.2500	53.20	15.97	69.17	69.87	-0.70	Peak	
2	5715.0000	72.08	16.19	88.27	109.40	-21.13	Peak	
3	5725.0000	67.18	16.22	83.40	122.20	-38.80	Peak	
4	5736.5000	100.46	16.26	116.72	122.20	-5.48	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

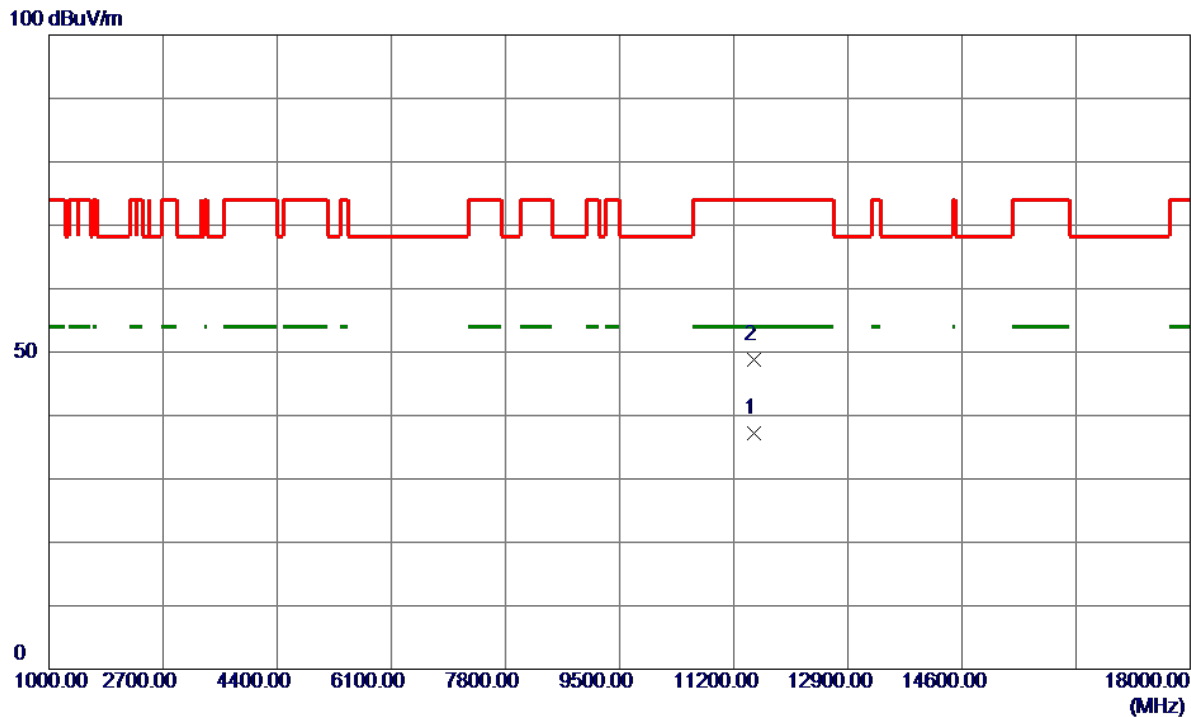


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11510.0000	24.72	12.40	37.12	54.00	-16.88	AVG	
2	11510.0000	36.39	12.40	48.79	74.00	-25.21	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

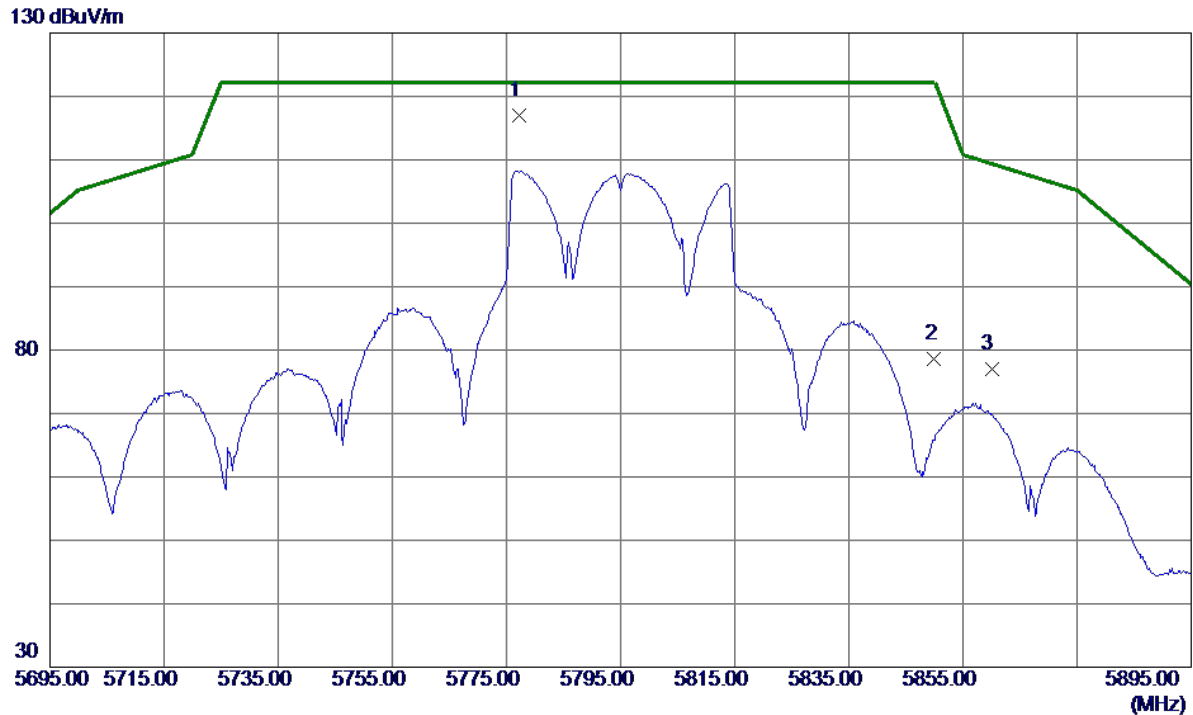


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5777.2000	100.68	16.40	117.08	122.20	-5.12	Peak	No Limit
2	5850.0000	62.00	16.65	78.65	122.20	-43.55	Peak	
3	5860.0000	60.26	16.68	76.94	109.40	-32.46	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

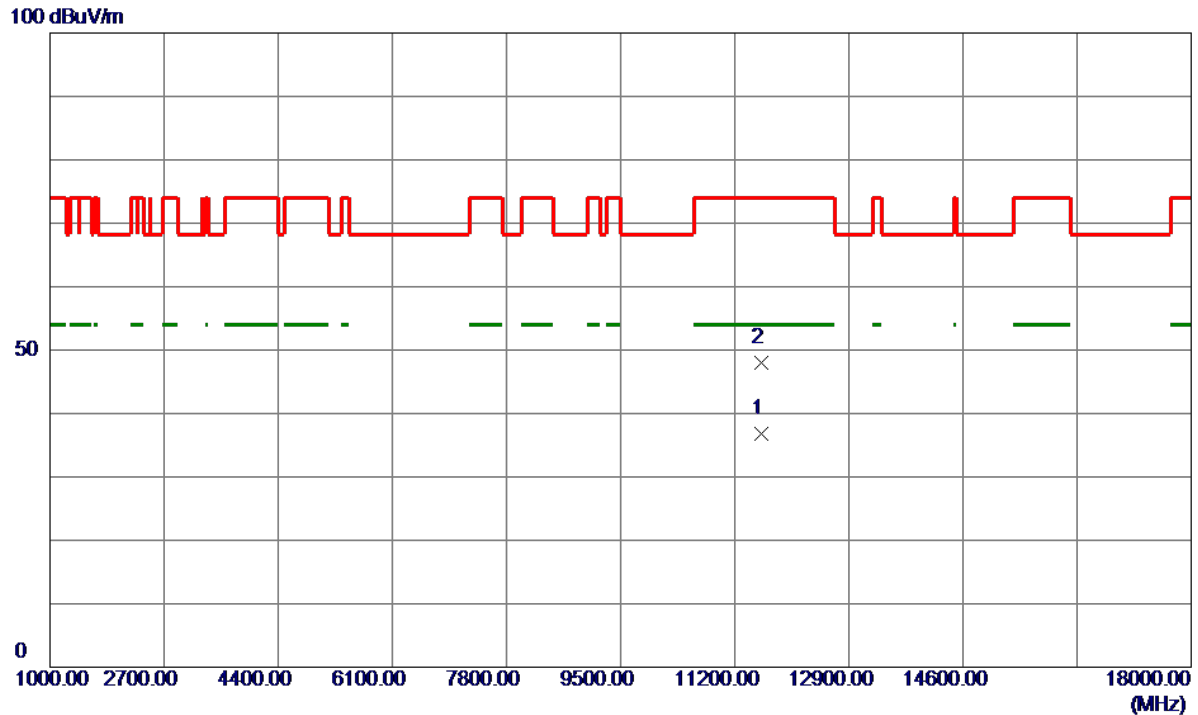


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11590.0000	24.51	12.32	36.83	54.00	-17.17	AVG	
2	11590.0000	35.61	12.32	47.93	74.00	-26.07	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

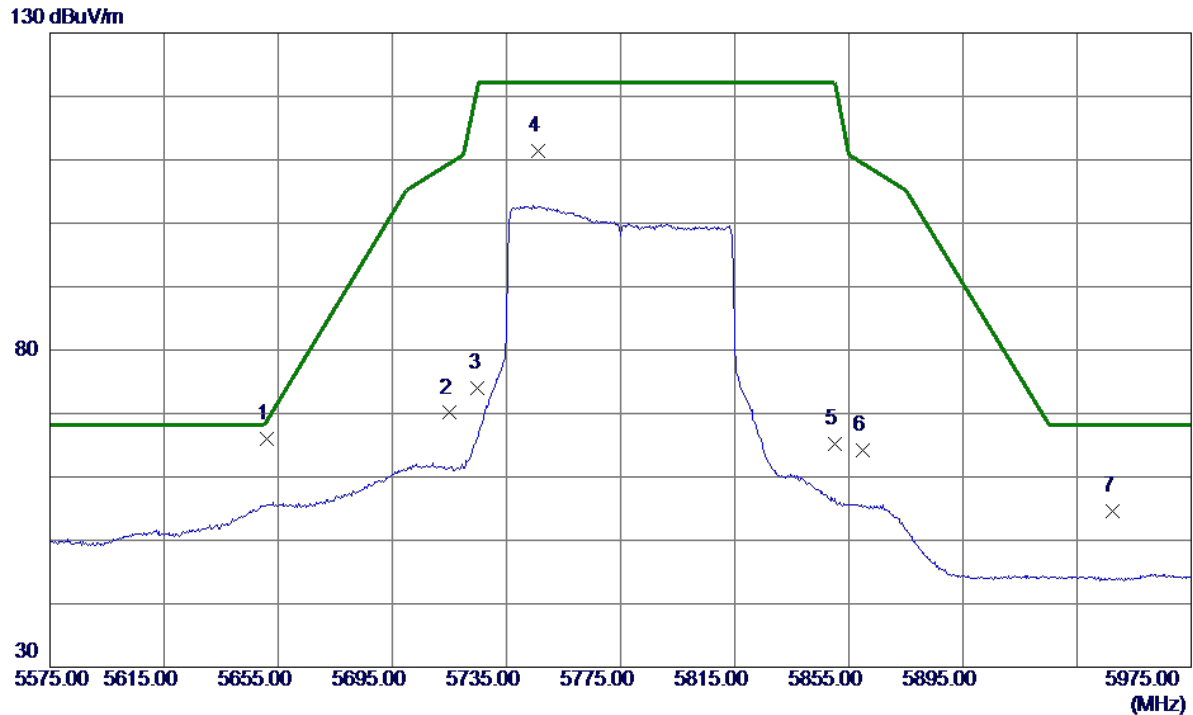


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5651.0000	50.01	15.97	65.98	68.94	-2.96	Peak	
2	5715.0000	53.91	16.19	70.10	109.40	-39.30	Peak	
3	5725.0000	57.71	16.22	73.93	122.20	-48.27	Peak	
4	5746.2000	95.17	16.29	111.46	122.20	-10.74	Peak	No Limit
5	5850.0000	48.46	16.65	65.11	122.20	-57.09	Peak	
6	5860.0000	47.48	16.68	64.16	109.40	-45.24	Peak	
7	5947.6000	37.65	16.98	54.63	68.20	-13.57	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

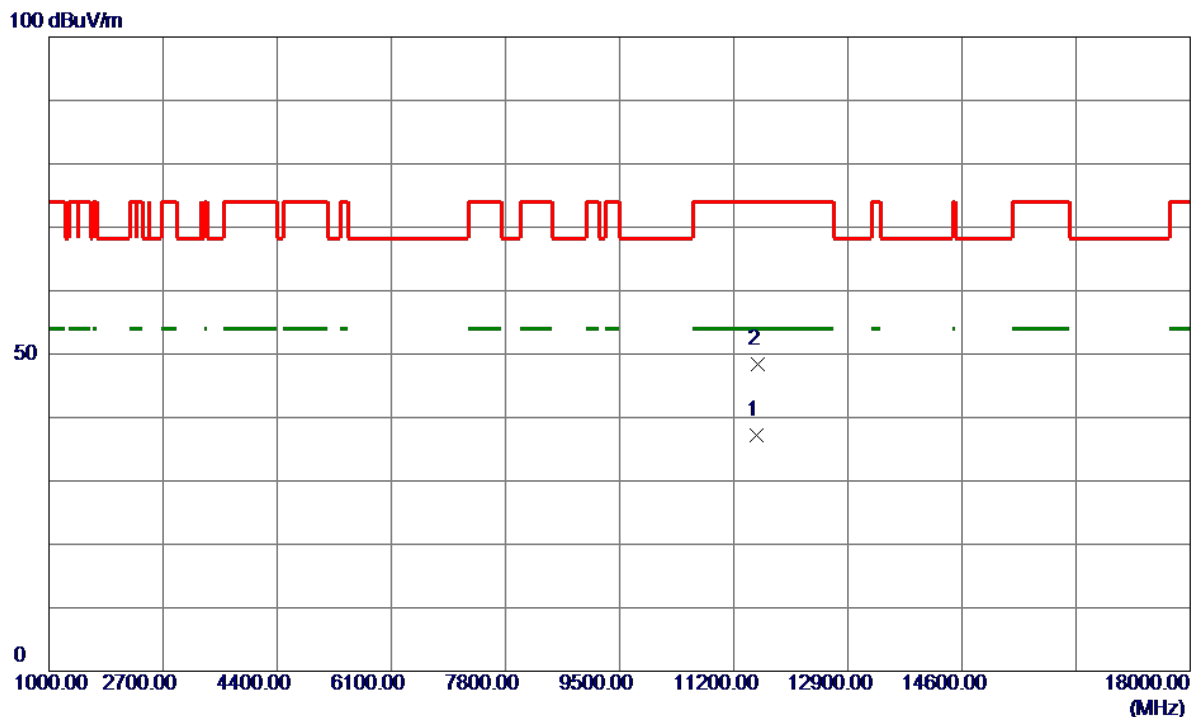


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11547.9349	24.81	12.36	37.17	54.00	-16.83	AVG	
2	11550.2400	36.05	12.36	48.41	74.00	-25.59	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Straddle channel:

Test Mode	UNII-2C_TX A Mode 5720 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

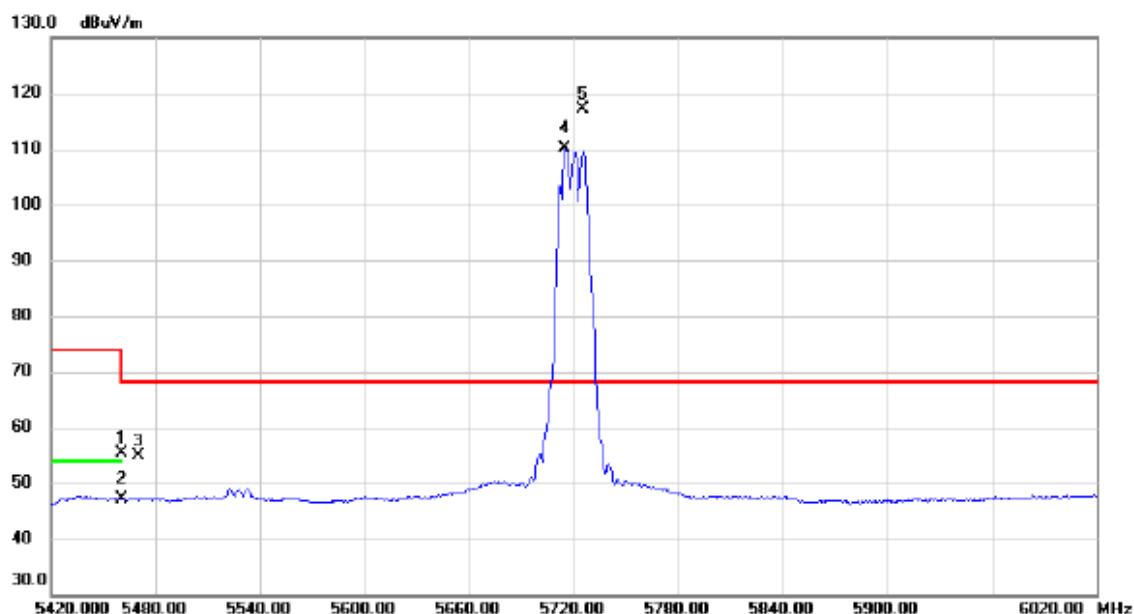


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	40.03	15.34	55.37	74.00	-18.63	peak	
2		5460.000	31.76	15.34	47.10	54.00	-6.90	AVG	
3		5470.000	39.56	15.37	54.93	68.20	-13.27	peak	
4	X	5715.200	93.94	16.19	110.13	68.20	41.93	AVG	No Limit
5	*	5724.800	100.91	16.22	117.13	68.20	48.93	peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5720 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

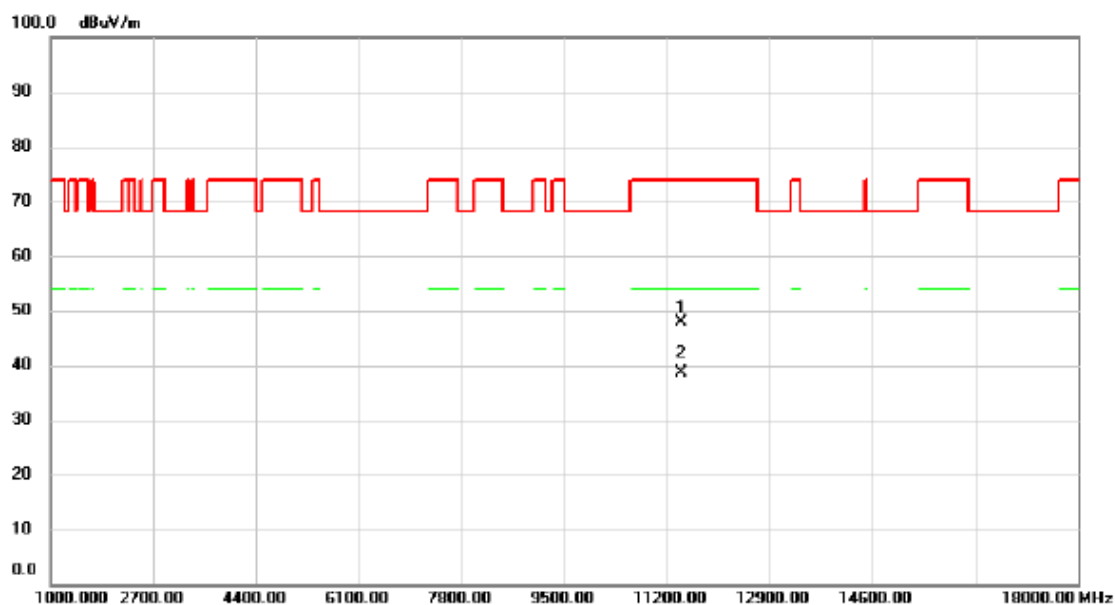


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11429.650	35.47	12.32	47.79	74.00	-26.21	peak	
2	*	11438.850	26.19	12.33	38.52	54.00	-15.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5720 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

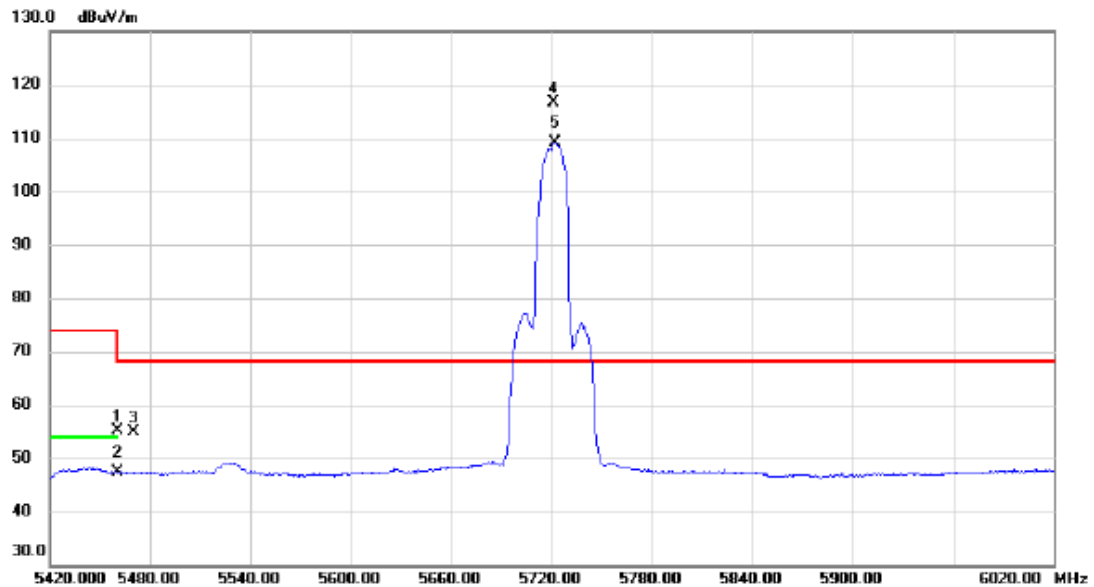


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	39.86	15.34	55.20	74.00	-18.80	peak	
2		5460.000	32.08	15.34	47.42	54.00	-6.58	AVG	
3		5470.000	39.48	15.37	54.85	68.20	-13.35	peak	
4	*	5721.200	100.39	16.21	116.60	68.20	48.40	peak	No Limit
5	X	5722.400	92.97	16.21	109.18	68.20	40.98	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5720 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

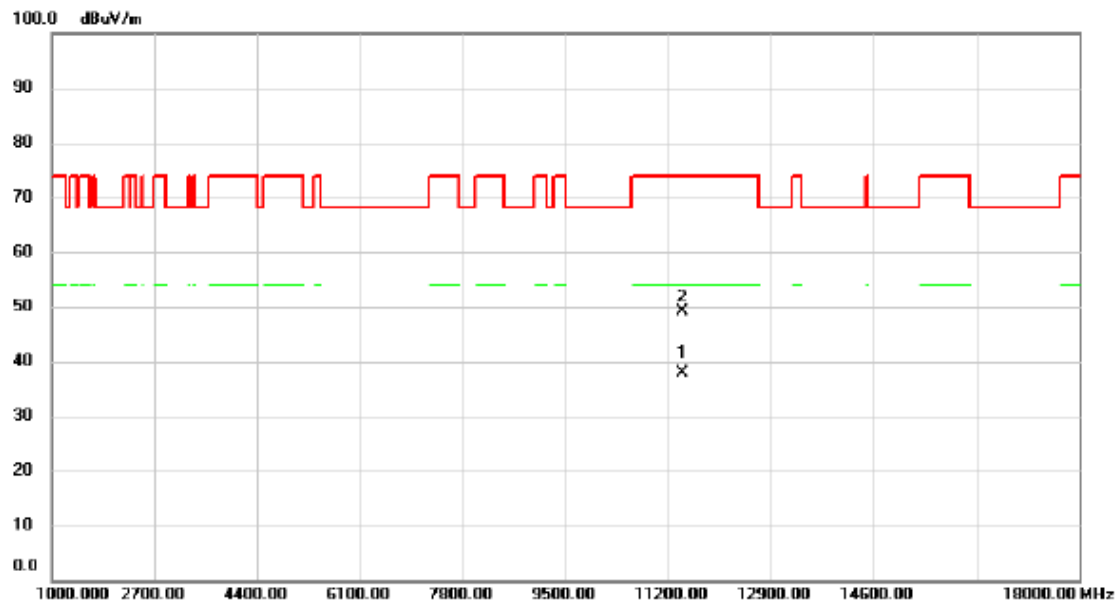


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11436.350	25.62	12.33	37.95	54.00	-16.05	AVG	
2		11438.500	36.68	12.33	49.01	74.00	-24.99	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5710 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

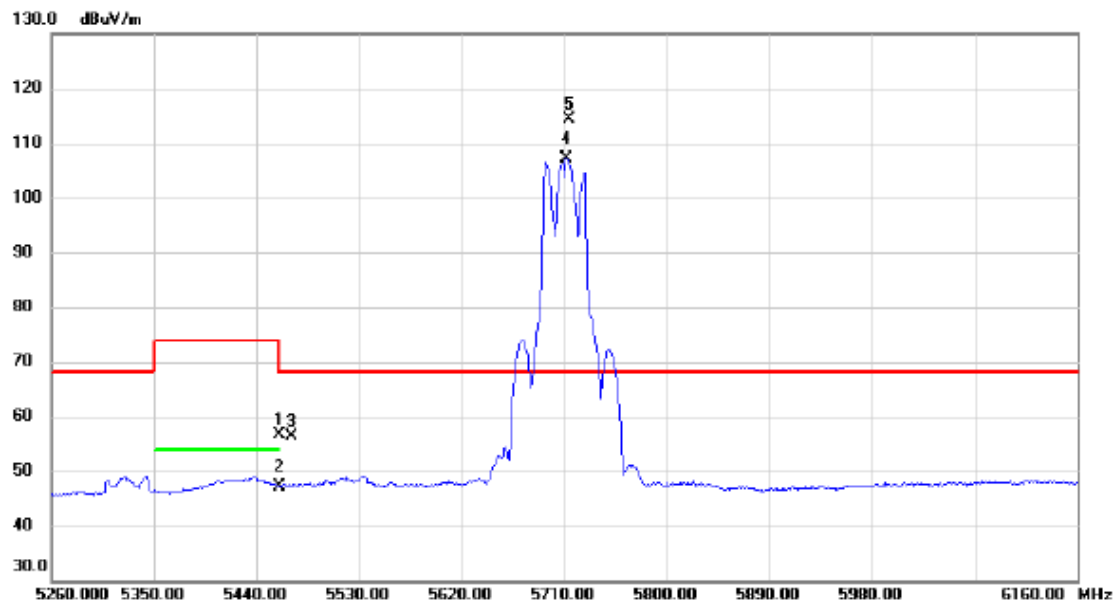


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	41.24	15.34	56.58	74.00	-17.42	peak	
2		5460.000	31.88	15.34	47.22	54.00	-6.78	AVG	
3		5470.000	41.13	15.37	56.50	68.20	-11.70	peak	
4	X	5711.800	90.93	16.17	107.10	68.20	38.90	AVG	No Limit
5	*	5714.500	98.12	16.18	114.30	68.20	46.10	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5710 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

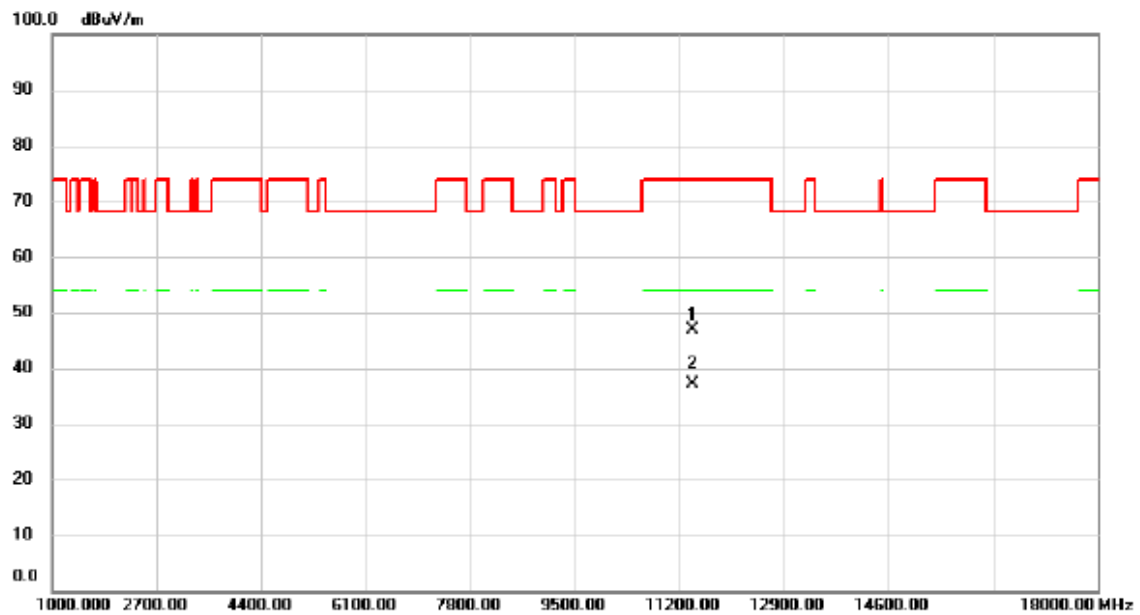


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11417.300	34.58	12.30	46.88	74.00	-27.12	peak	
2	*	11419.480	24.90	12.30	37.20	54.00	-16.80	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5690 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

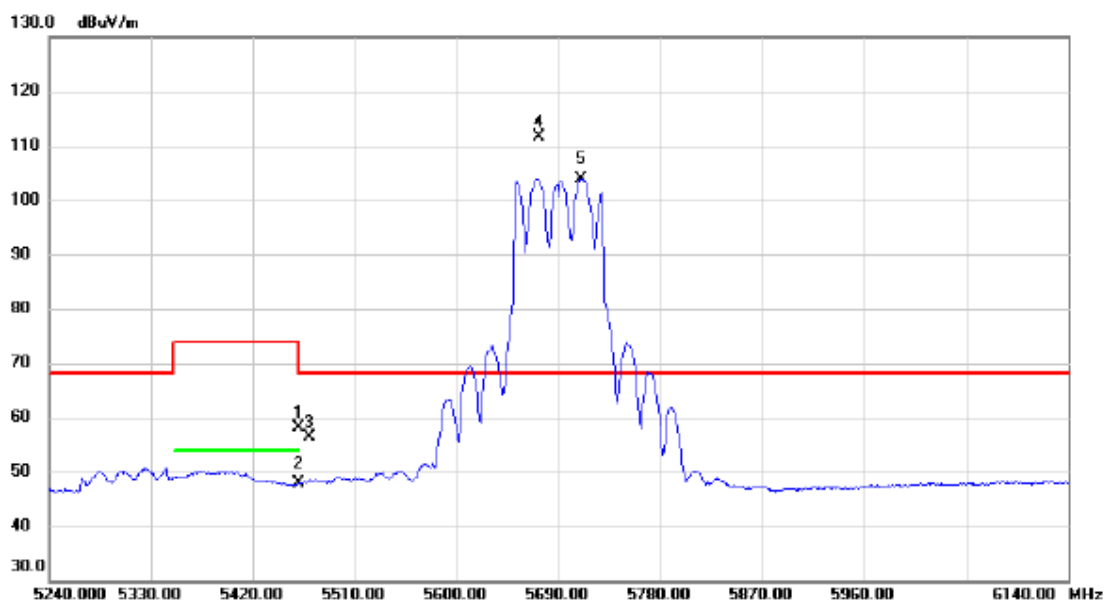


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	42.89	15.34	58.23	74.00	-15.77	peak	
2		5460.000	32.51	15.34	47.85	54.00	-6.15	AVG	
3		5470.000	40.96	15.37	56.33	68.20	-11.87	peak	
4	*	5672.000	95.46	16.05	111.51	68.20	43.31	peak	No Limit
5	X	5709.800	87.82	16.17	103.99	68.20	35.79	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5690 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

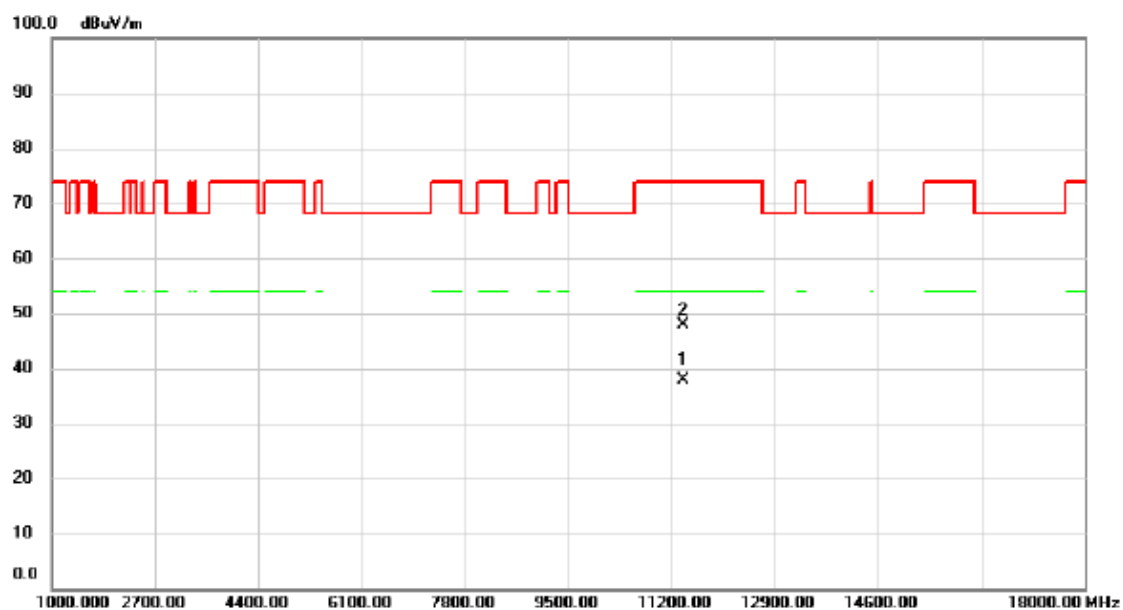


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11391.500	25.59	12.28	37.87	54.00	-16.13	AVG	
2		11394.200	35.55	12.28	47.83	74.00	-26.17	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5720 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

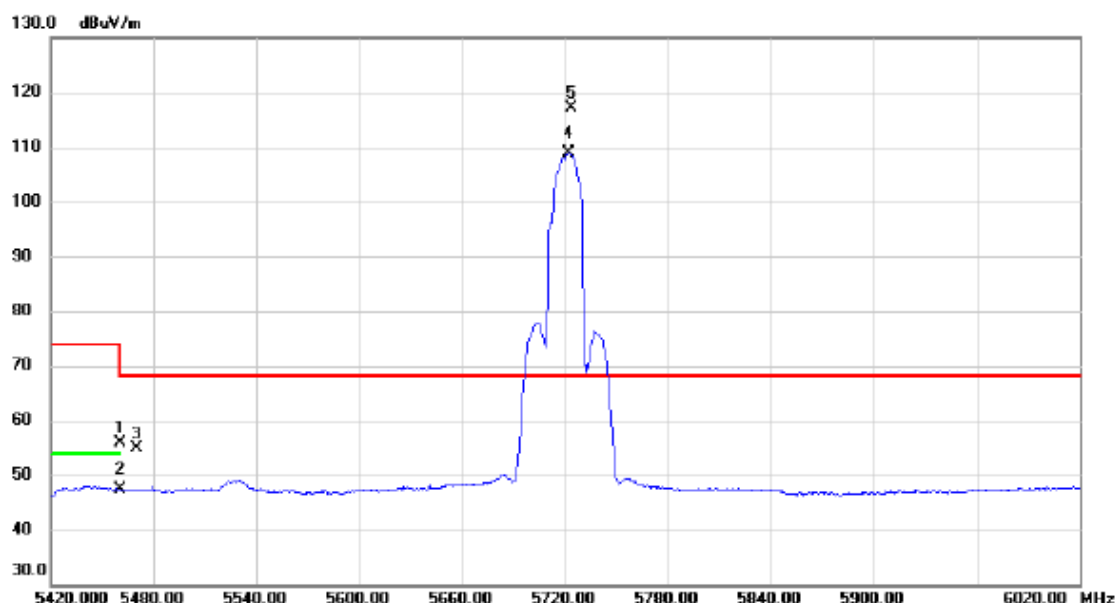


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5460.000	40.58	15.34	55.92	74.00	-18.08	peak	
2		5460.000	32.07	15.34	47.41	54.00	-6.59	AVG	
3		5470.000	39.44	15.37	54.81	68.20	-13.39	peak	
4	X	5722.400	92.67	16.21	108.88	68.20	40.68	AVG	No Limit
5	*	5723.600	100.81	16.22	117.03	68.20	48.83	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5720 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

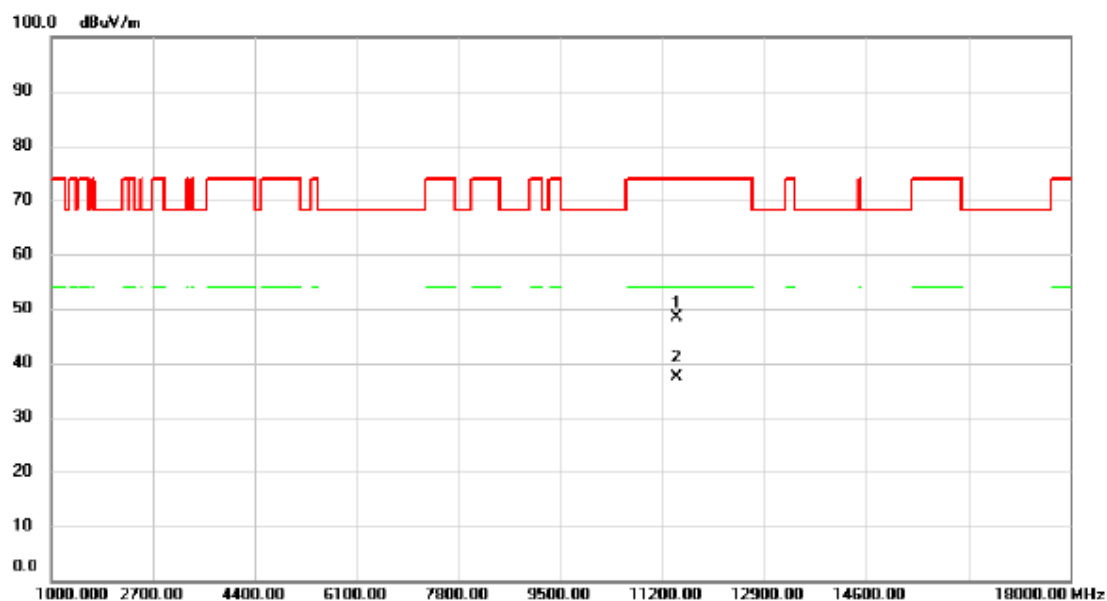


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11433.400	36.04	12.33	48.37	74.00	-25.63	peak	
2 *	11437.400	25.09	12.33	37.42	54.00	-16.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5710 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

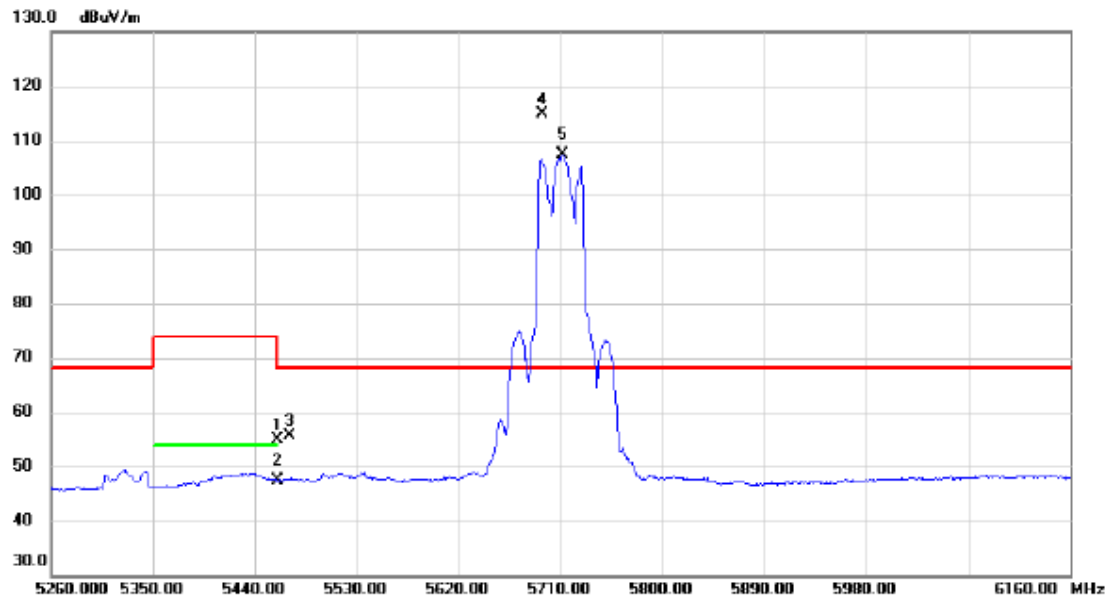


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	39.60	15.34	54.94	74.00	-19.06	peak	
2		5460.000	32.12	15.34	47.46	54.00	-6.54	AVG	
3		5470.000	40.16	15.37	55.53	68.20	-12.67	peak	
4	*	5693.800	98.85	16.12	114.97	68.20	46.77	peak	No Limit
5	X	5711.800	91.11	16.17	107.28	68.20	39.08	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5710 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

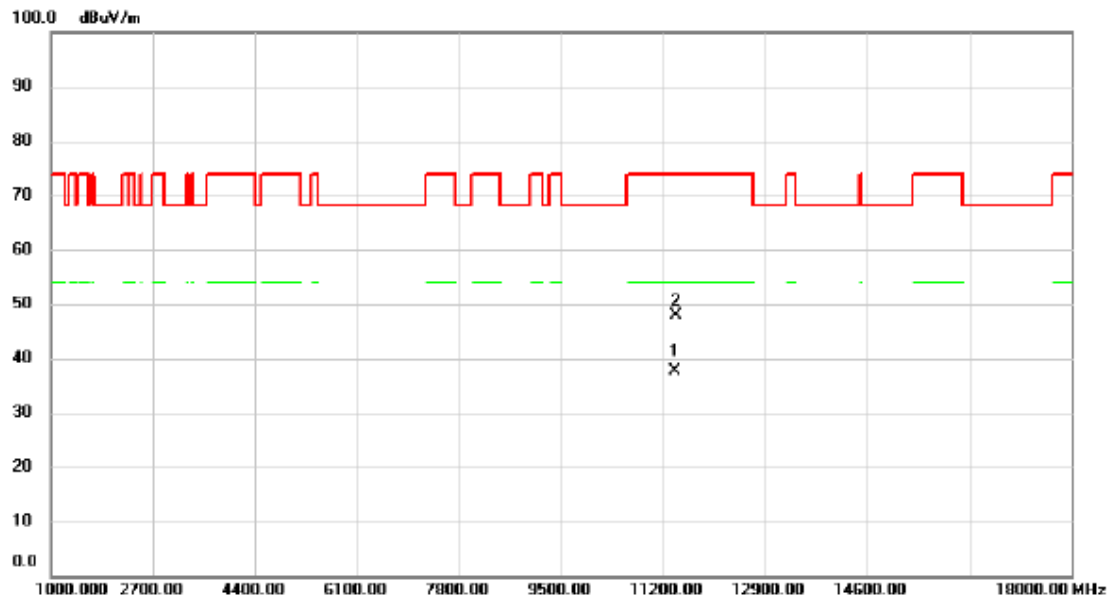


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11395.050	25.26	12.28	37.54	54.00	-16.46	AVG	
2		11406.900	35.62	12.28	47.90	74.00	-26.10	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5690 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

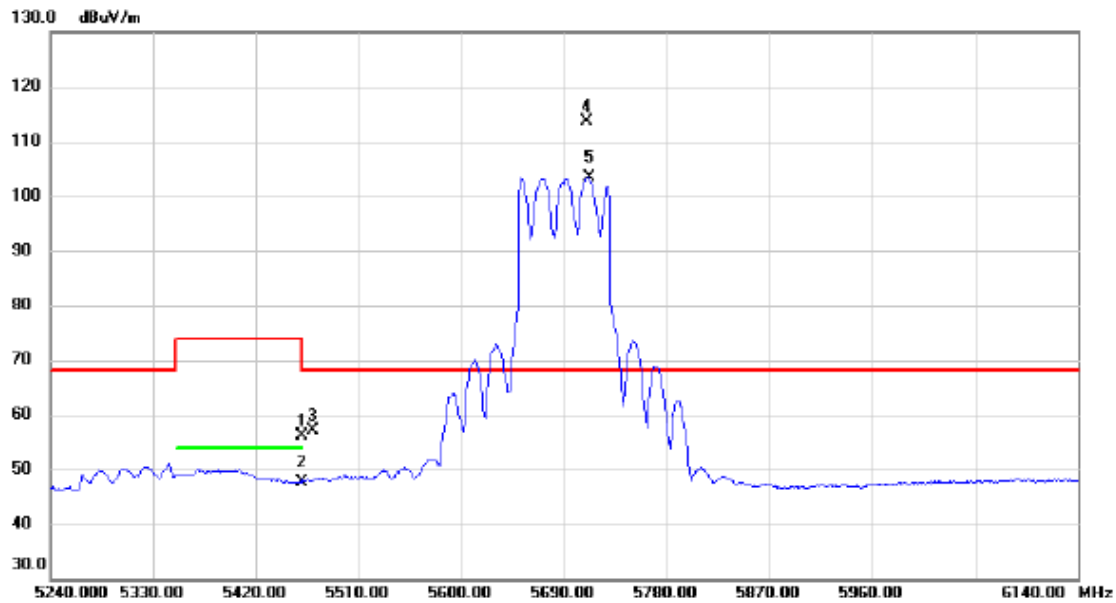


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.000	40.79	15.34	56.13	74.00	-17.87	peak	
2	5460.000	32.36	15.34	47.70	54.00	-6.30	AVG	
3	5470.000	41.78	15.37	57.15	68.20	-11.05	peak	
4 *	5709.800	97.44	16.17	113.61	68.20	45.41	peak	No Limit
5 X	5711.600	87.17	16.17	103.34	68.20	35.14	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5690 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

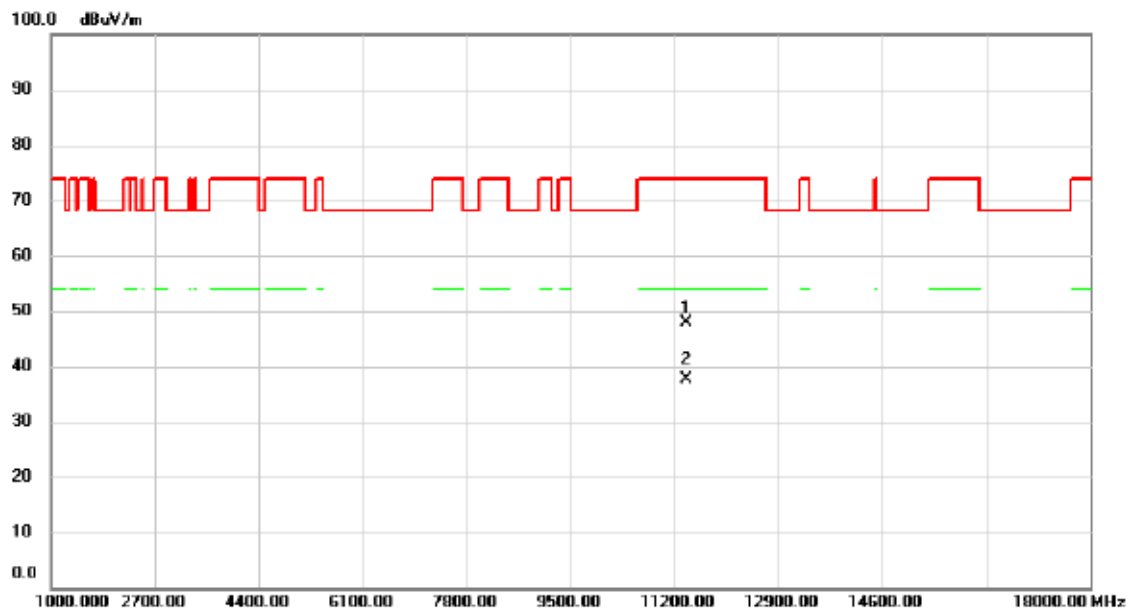


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11394.500	35.54	12.28	47.82	74.00	-26.18	peak	
2	*	11395.900	25.32	12.28	37.60	54.00	-16.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT240) Mode 5610 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

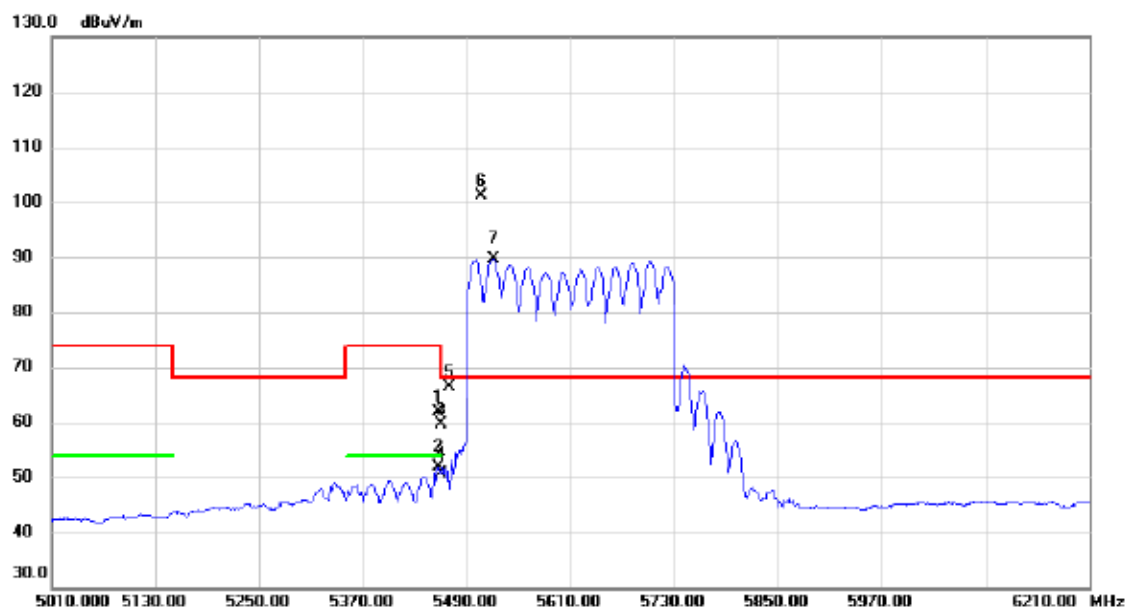


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5457.600	46.58	15.33	61.91	74.00	-12.09	peak	
2	5457.600	36.59	15.33	51.92	54.00	-2.08	AVG	
3	5460.000	44.25	15.34	59.59	74.00	-14.41	peak	
4	5460.000	35.27	15.34	50.61	54.00	-3.39	AVG	
5	5470.000	50.90	15.37	66.27	68.20	-1.93	peak	
6 *	5506.800	85.70	15.48	101.18	68.20	32.98	peak	No Limit
7 X	5521.200	74.16	15.53	89.69	68.20	21.49	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT240) Mode 5610 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

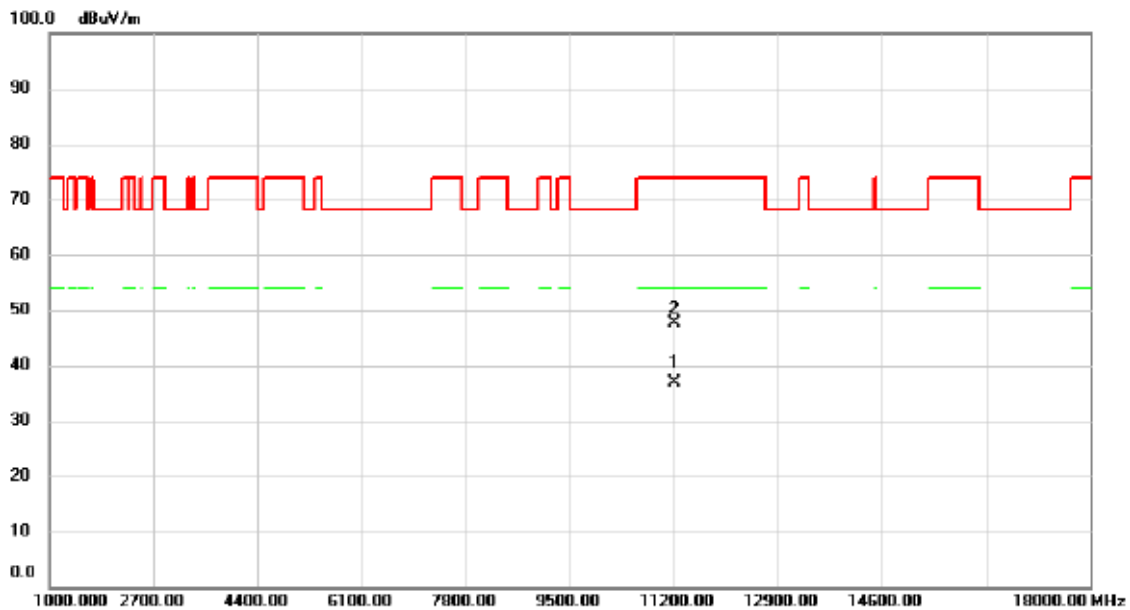

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11215.460	24.93	12.04	36.97	54.00	-17.03	AVG	
2		11220.620	35.48	12.04	47.52	74.00	-26.48	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

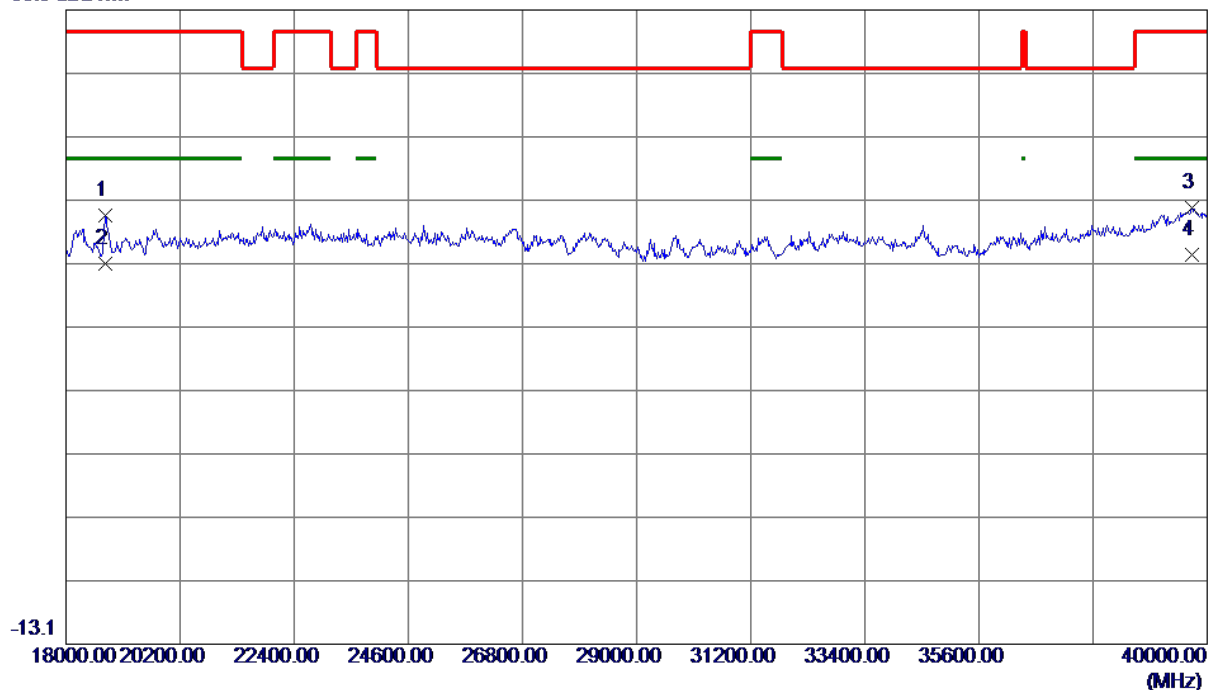


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	18748.0000	52.15	2.37	54.52	83.50	-28.98	Peak	
2	18748.0000	44.59	2.37	46.96	63.50	-16.54	AVG	
3	39714.0000	42.41	13.34	55.75	83.50	-27.75	Peak	
4 *	39714.0000	34.87	13.34	48.21	63.50	-15.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

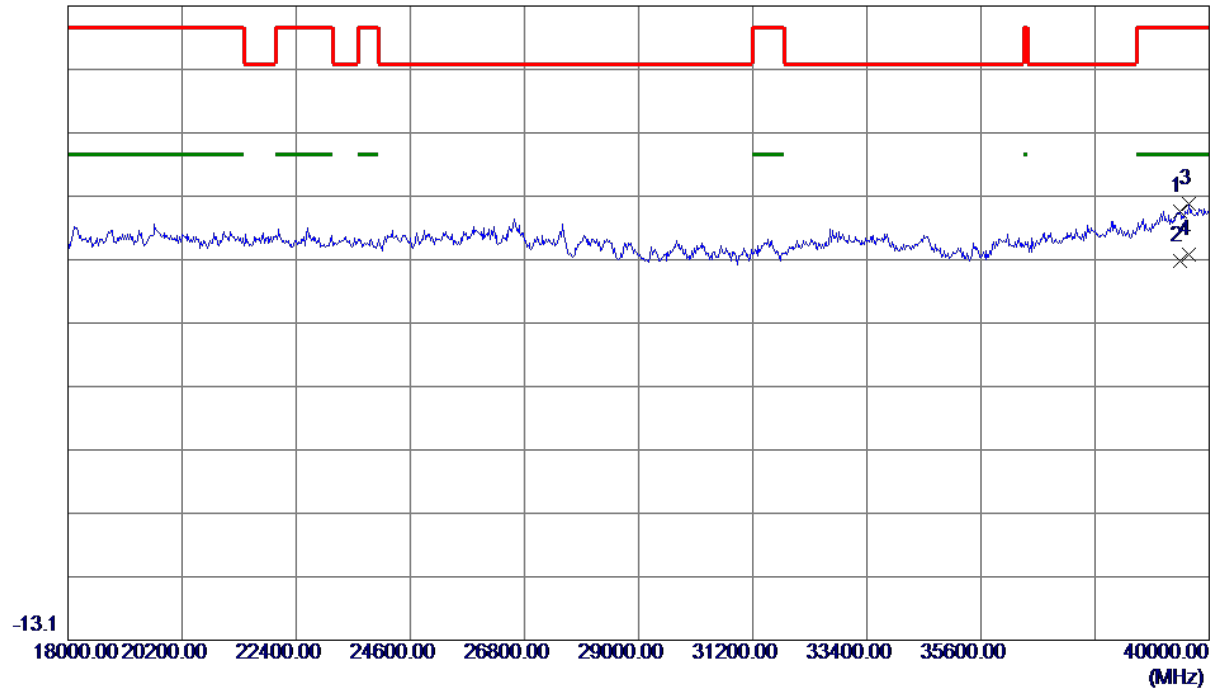

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	39428.0000	41.45	13.06	54.51	83.50	-28.99	Peak	
2	39428.0000	33.71	13.06	46.77	63.50	-16.73	AVG	
3	39604.0000	42.26	13.35	55.61	83.50	-27.89	Peak	
4 *	39604.0000	34.28	13.35	47.63	63.50	-15.87	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Worst case:

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

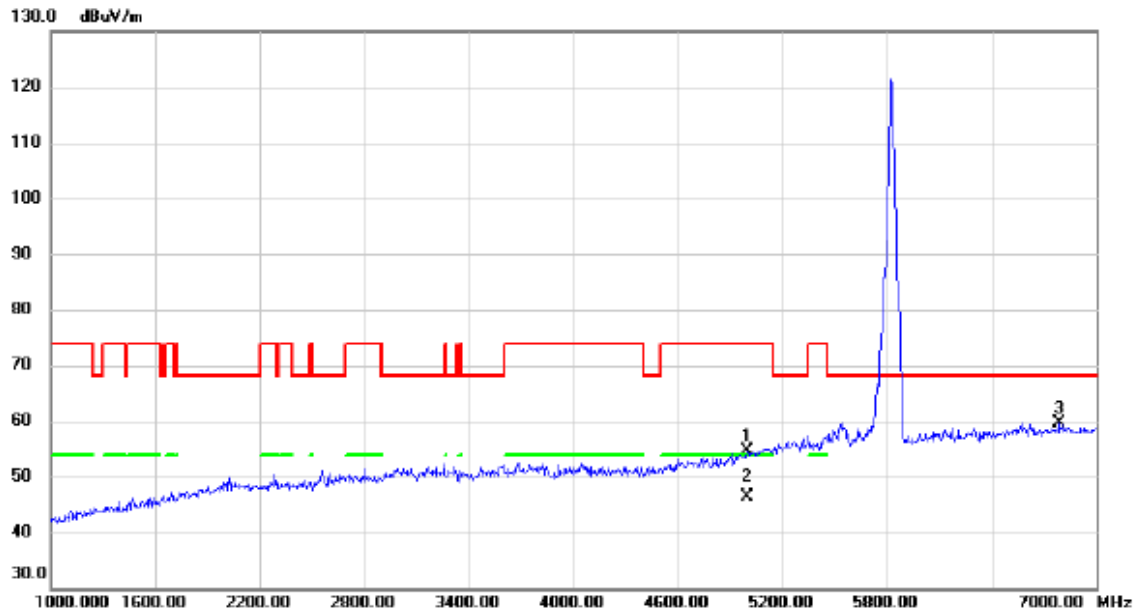


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4996.000	40.59	14.01	54.60	74.00	-19.40	peak	
2	*	4996.000	32.25	14.01	46.26	54.00	-7.74	AVG	
3		6790.000	40.28	19.37	59.65	68.20	-8.55	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

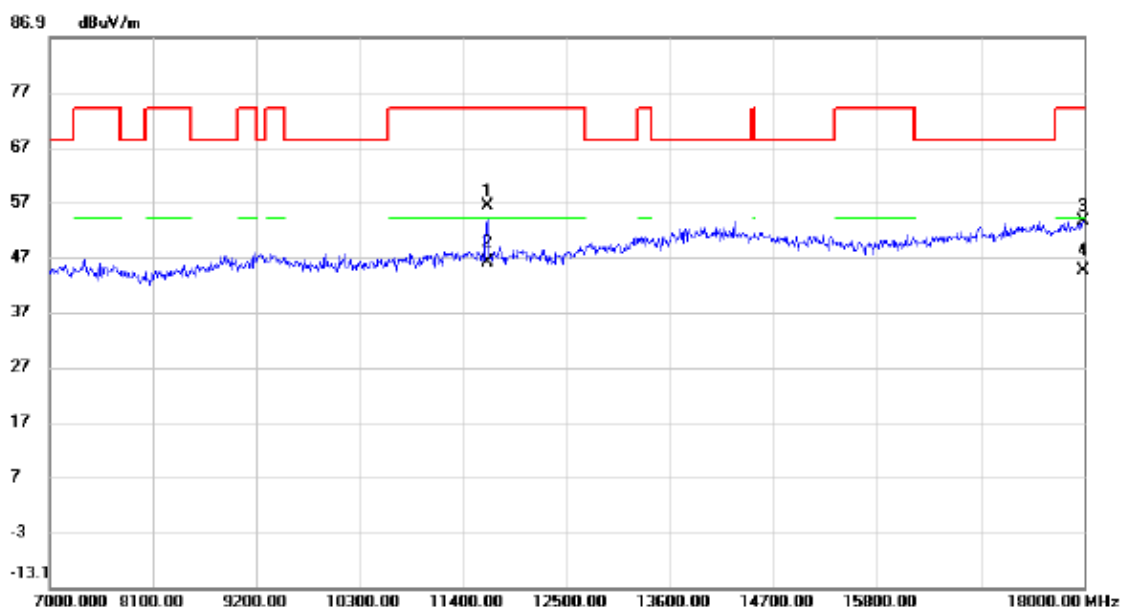


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11649.600	44.00	12.25	56.25	74.00	-17.75	peak	
2	*	11649.950	33.72	12.25	45.97	54.00	-8.03	AVG	
3		17989.000	37.81	15.67	53.48	74.00	-20.52	peak	
4		17989.000	28.95	15.67	44.62	54.00	-9.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Directional Antenna

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

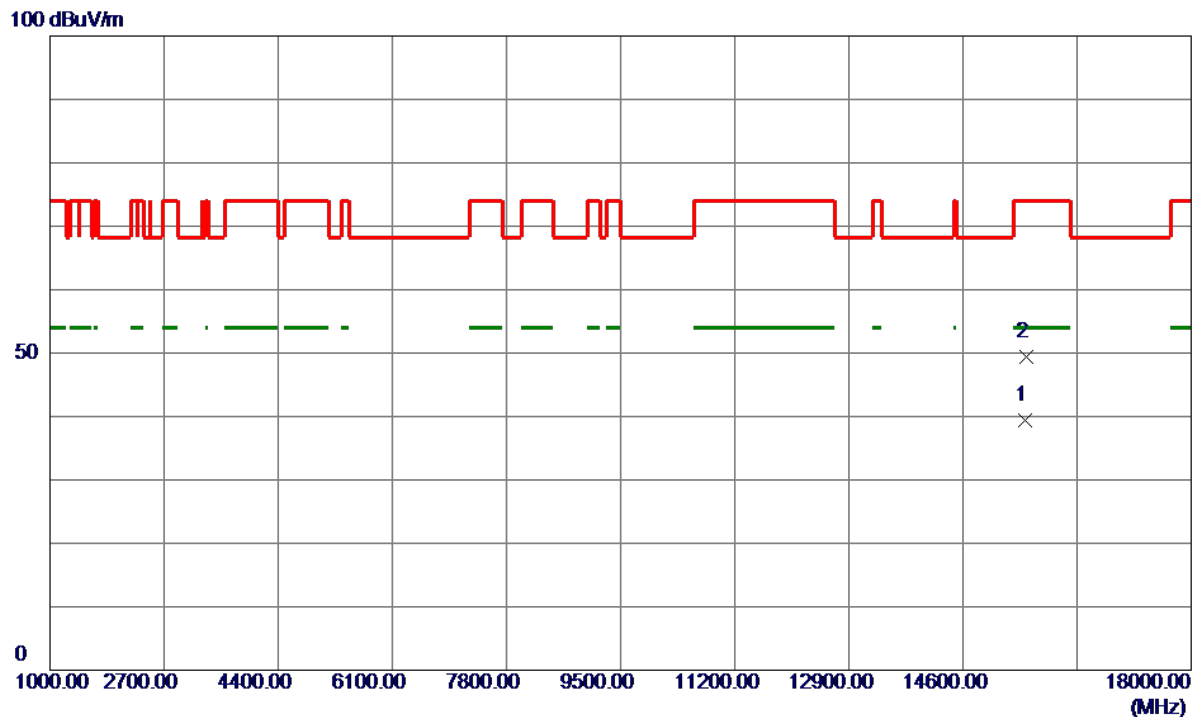


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15533.4500	26.76	12.63	39.39	54.00	-14.61	AVG	
2	15537.5000	36.77	12.63	49.40	74.00	-24.60	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

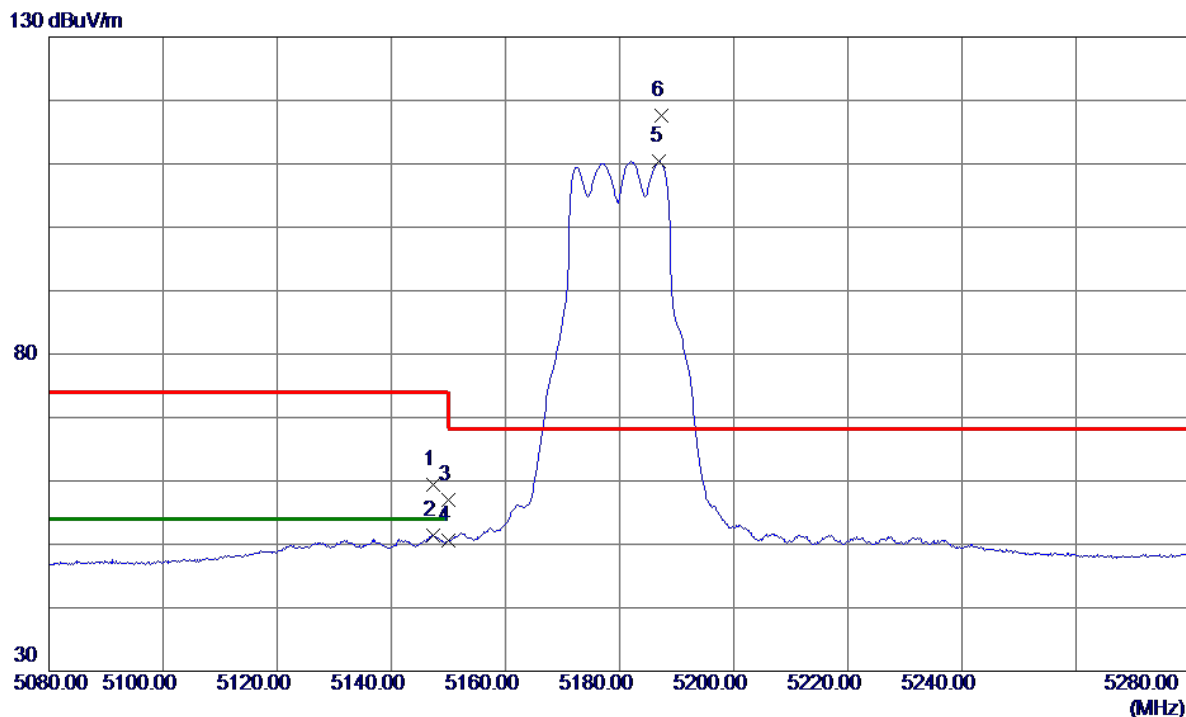


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5147.4000	44.93	14.44	59.37	74.00	-14.63	Peak	
2	5147.4000	36.92	14.44	51.36	54.00	-2.64	AVG	
3	5150.0000	42.61	14.45	57.06	74.00	-16.94	Peak	
4	5150.0000	36.24	14.45	50.69	54.00	-3.31	AVG	
5	5187.0000	95.78	14.56	110.34	999.00	-888.66	AVG	No Limit
6 *	5187.4000	102.98	14.56	117.54	68.20	49.34	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

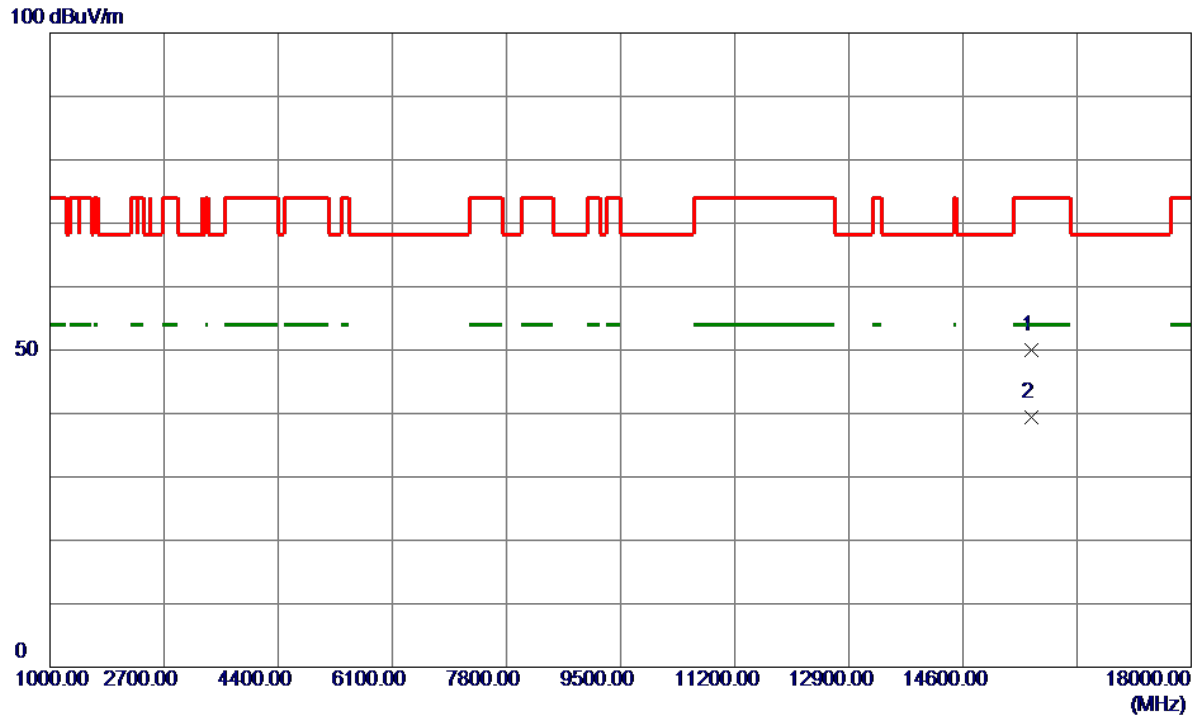


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15612.2500	37.32	12.69	50.01	74.00	-23.99	Peak	
2 *	15616.9500	26.64	12.70	39.34	54.00	-14.66	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

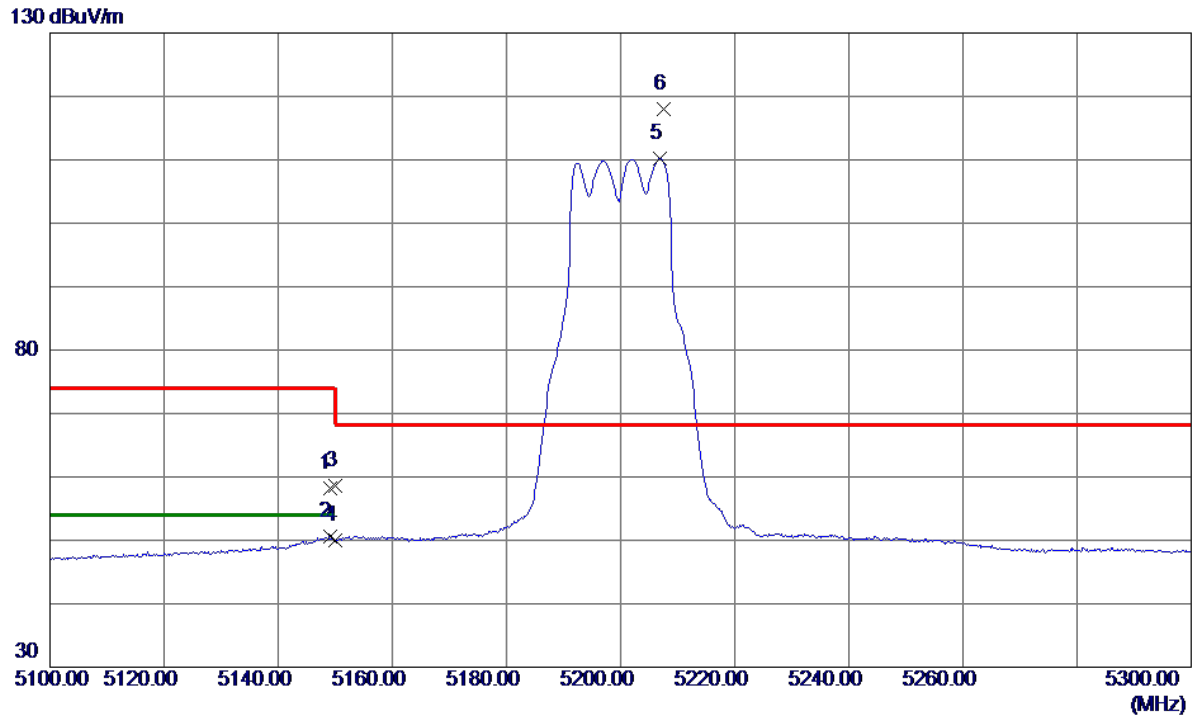


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.0000	43.75	14.45	58.20	74.00	-15.80	Peak	
2	5149.0000	36.09	14.45	50.54	54.00	-3.46	AVG	
3	5150.0000	44.23	14.45	58.68	74.00	-15.32	Peak	
4	5150.0000	35.59	14.45	50.04	54.00	-3.96	AVG	
5	5206.8000	95.62	14.61	110.23	999.00	-888.77	AVG	No Limit
6 *	5207.6000	103.45	14.62	118.07	68.20	49.87	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

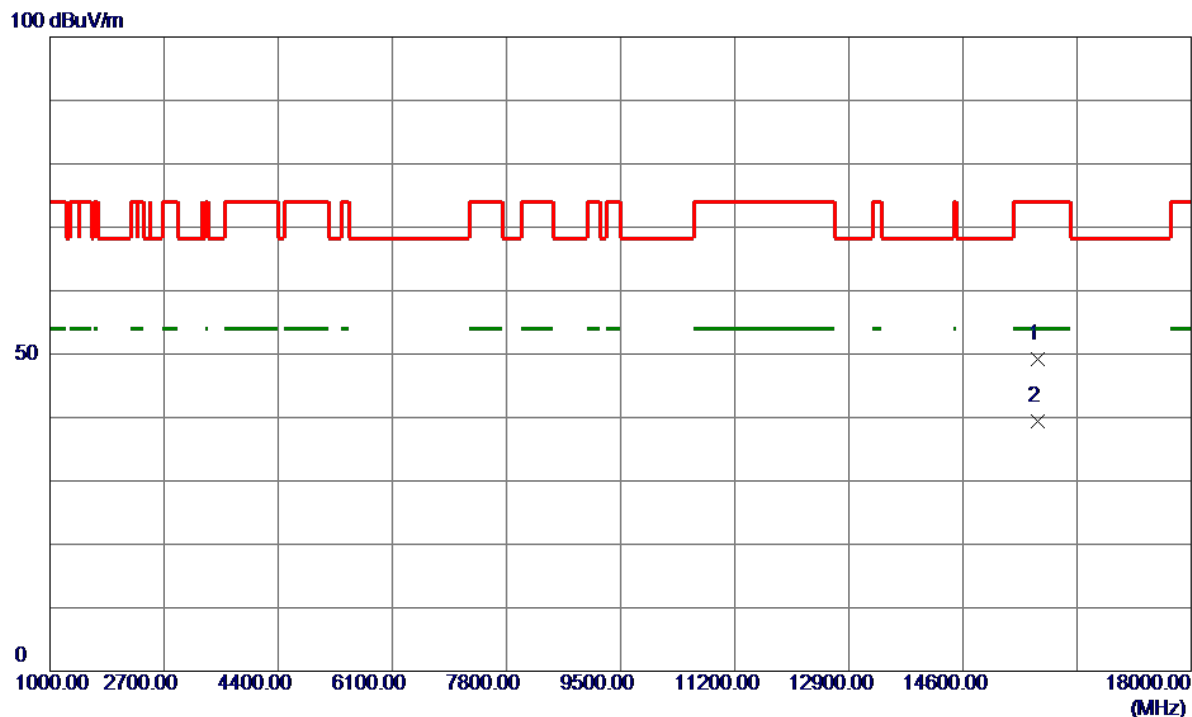


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15710.5000	36.52	12.77	49.29	74.00	-24.71	Peak	
2 *	15711.9000	26.59	12.77	39.36	54.00	-14.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

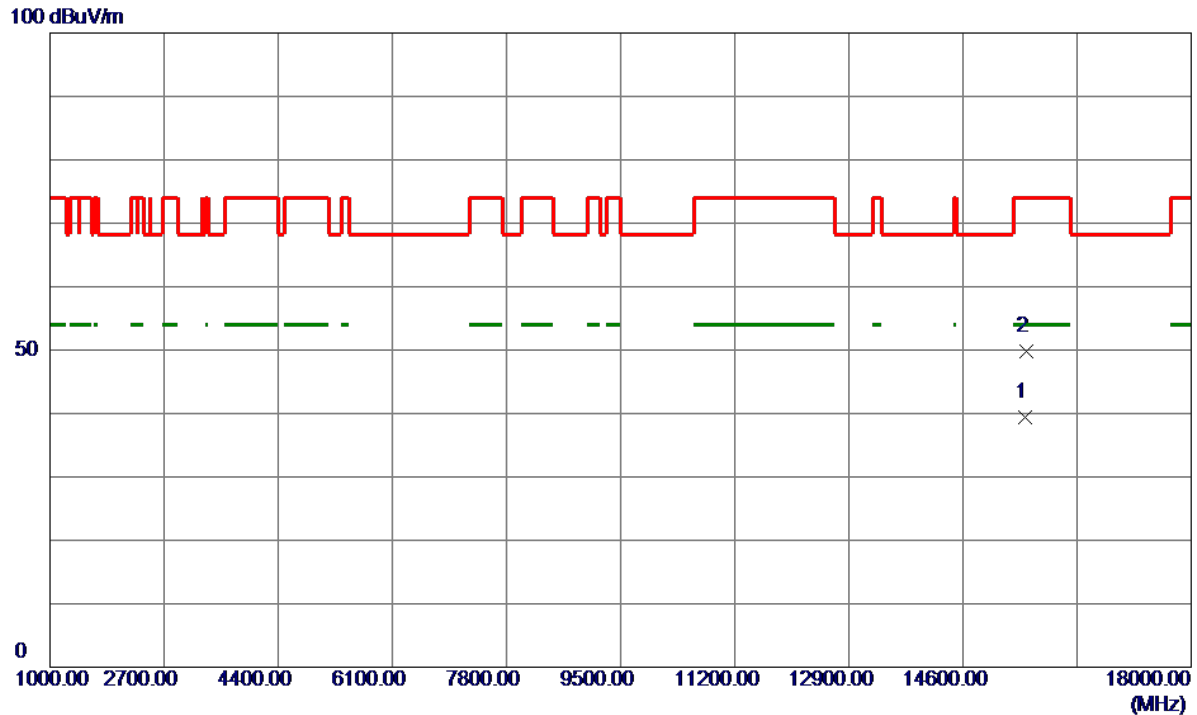


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15526.0500	26.76	12.63	39.39	54.00	-14.61	AVG	
2	15548.7000	37.14	12.64	49.78	74.00	-24.22	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

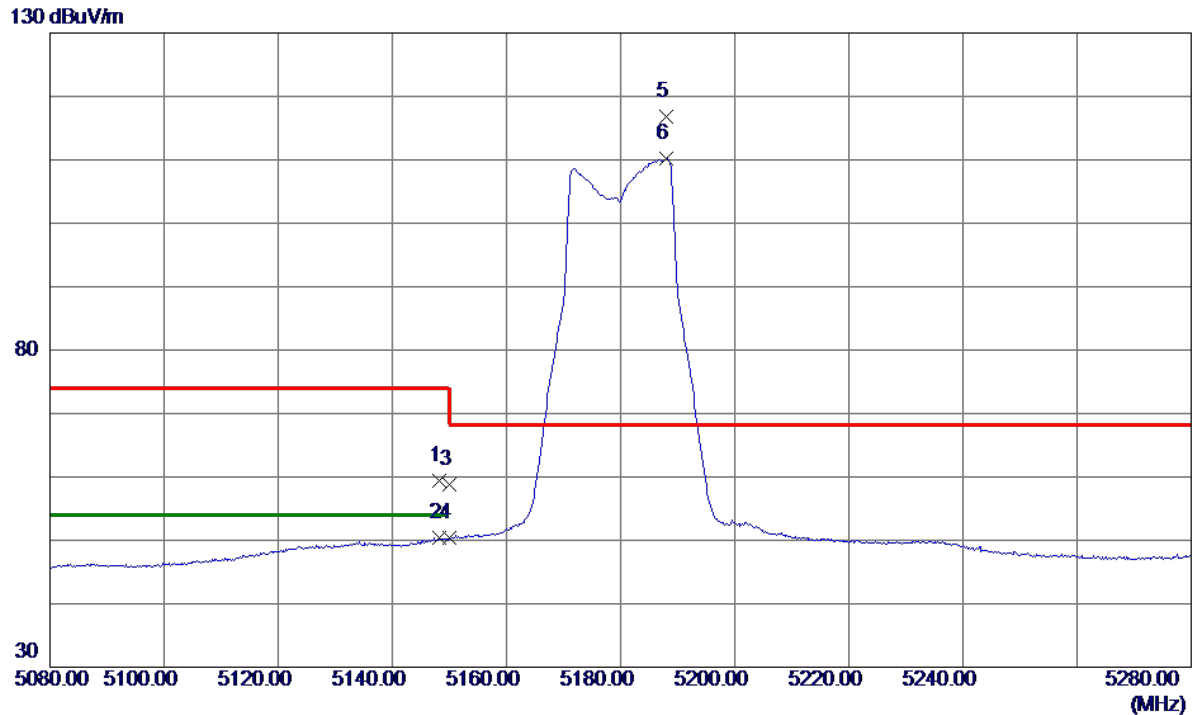


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5148.2000	44.91	14.45	59.36	74.00	-14.64	Peak	
2	5148.2000	35.98	14.45	50.43	54.00	-3.57	AVG	
3	5150.0000	44.29	14.45	58.74	74.00	-15.26	Peak	
4	5150.0000	35.88	14.45	50.33	54.00	-3.67	AVG	
5 *	5188.0000	102.26	14.56	116.82	68.20	48.62	Peak	No Limit
6	5188.0000	95.55	14.56	110.11	999.00	-888.89	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

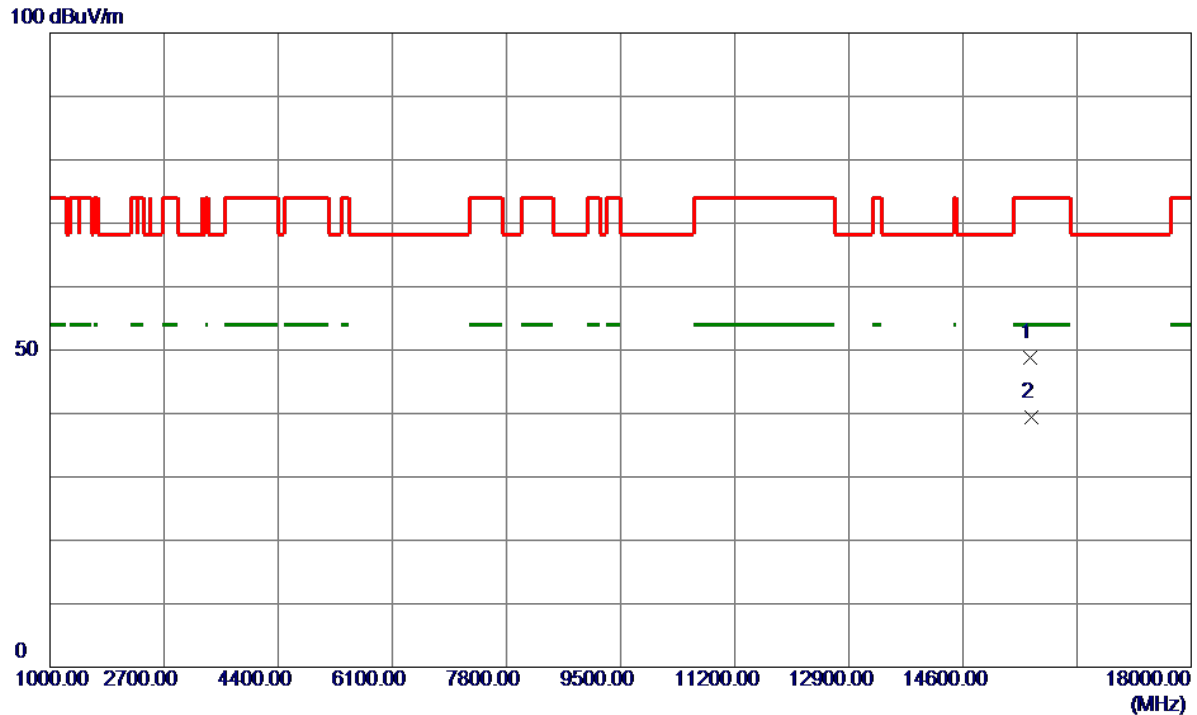


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15594.6000	36.17	12.68	48.85	74.00	-25.15	Peak	
2 *	15618.3500	26.64	12.70	39.34	54.00	-14.66	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

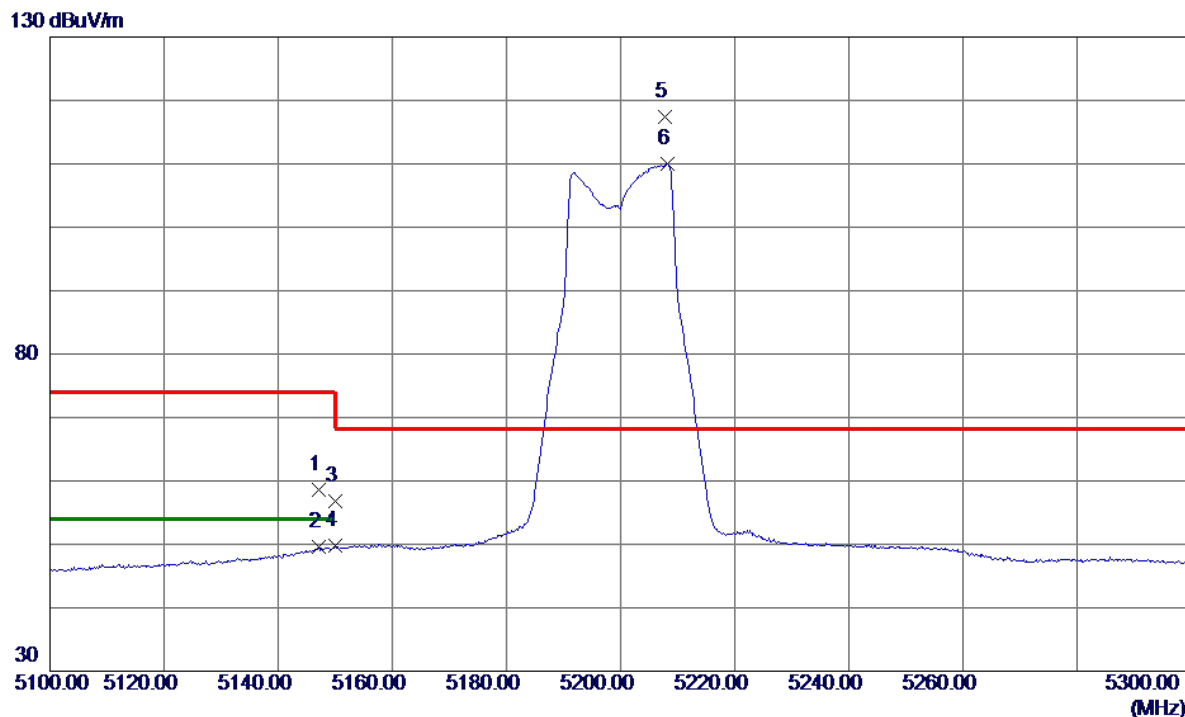


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5147.2000	44.12	14.44	58.56	74.00	-15.44	Peak	
2	5147.2000	35.25	14.44	49.69	54.00	-4.31	AVG	
3	5150.0000	42.31	14.45	56.76	74.00	-17.24	Peak	
4	5150.0000	35.28	14.45	49.73	54.00	-4.27	AVG	
5 *	5207.8000	102.72	14.62	117.34	68.20	49.14	Peak	No Limit
6	5208.2000	95.32	14.62	109.94	999.00	-889.06	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

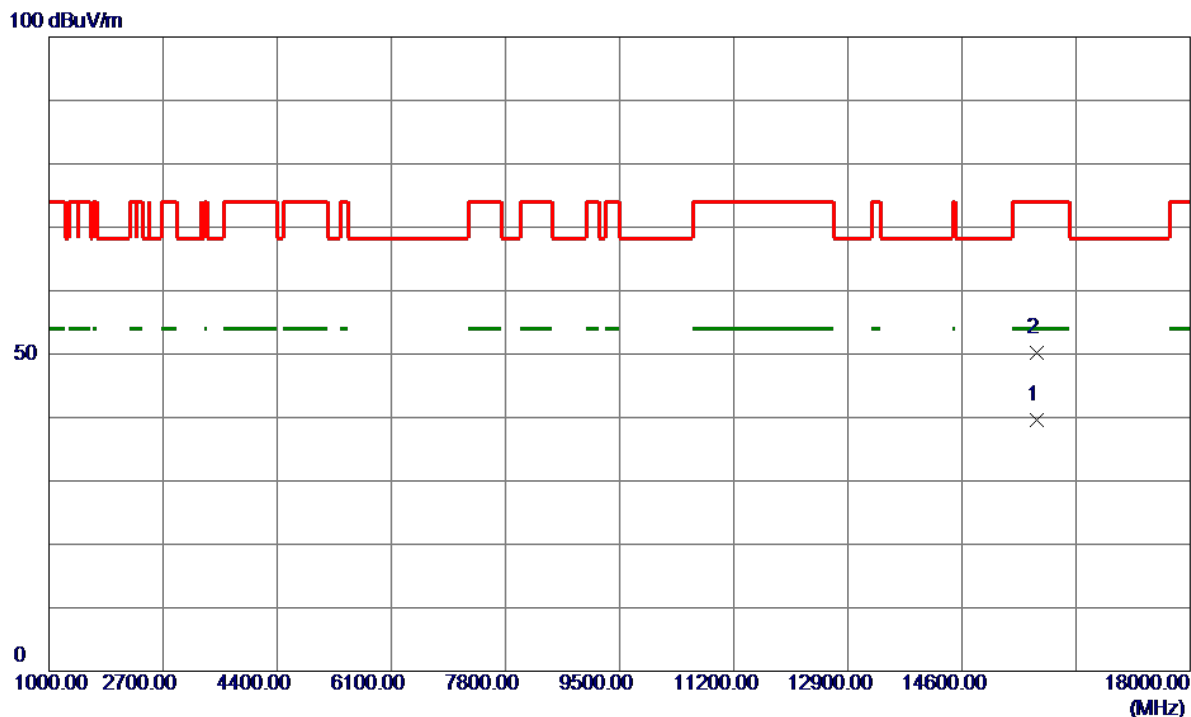


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15712.6500	26.78	12.77	39.55	54.00	-14.45	AVG	
2	15720.7000	37.33	12.78	50.11	74.00	-23.89	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

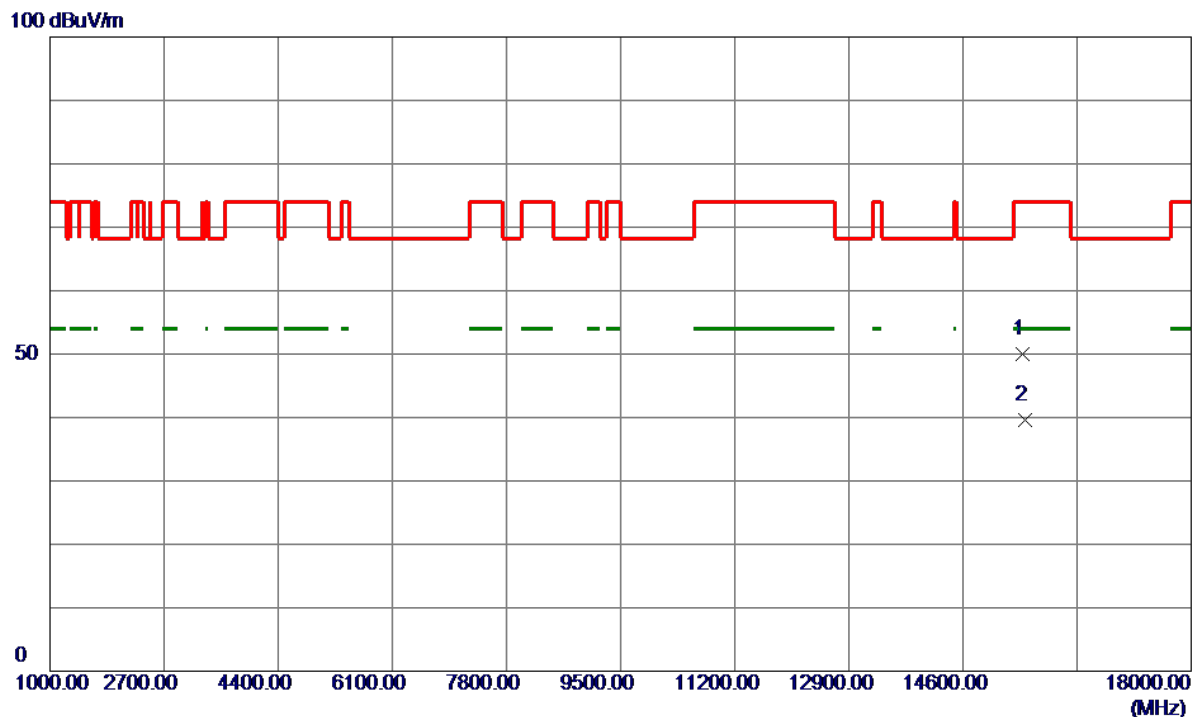


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15494.5000	37.40	12.61	50.01	74.00	-23.99	Peak	
2 *	15522.4000	26.90	12.62	39.52	54.00	-14.48	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

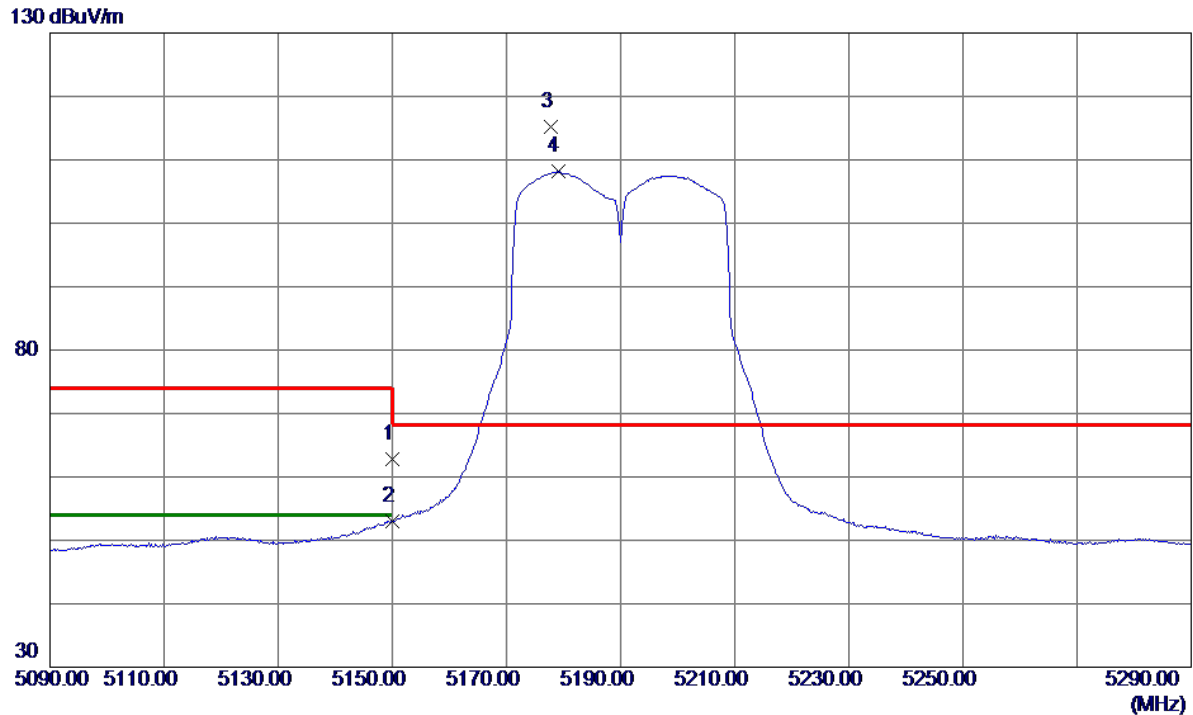


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	48.30	14.45	62.75	74.00	-11.25	Peak	
2	5150.0000	38.56	14.45	53.01	54.00	-0.99	AVG	
3 *	5177.8000	100.62	14.53	115.15	68.20	46.95	Peak	No Limit
4	5179.0000	93.61	14.53	108.14	999.00	-890.86	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

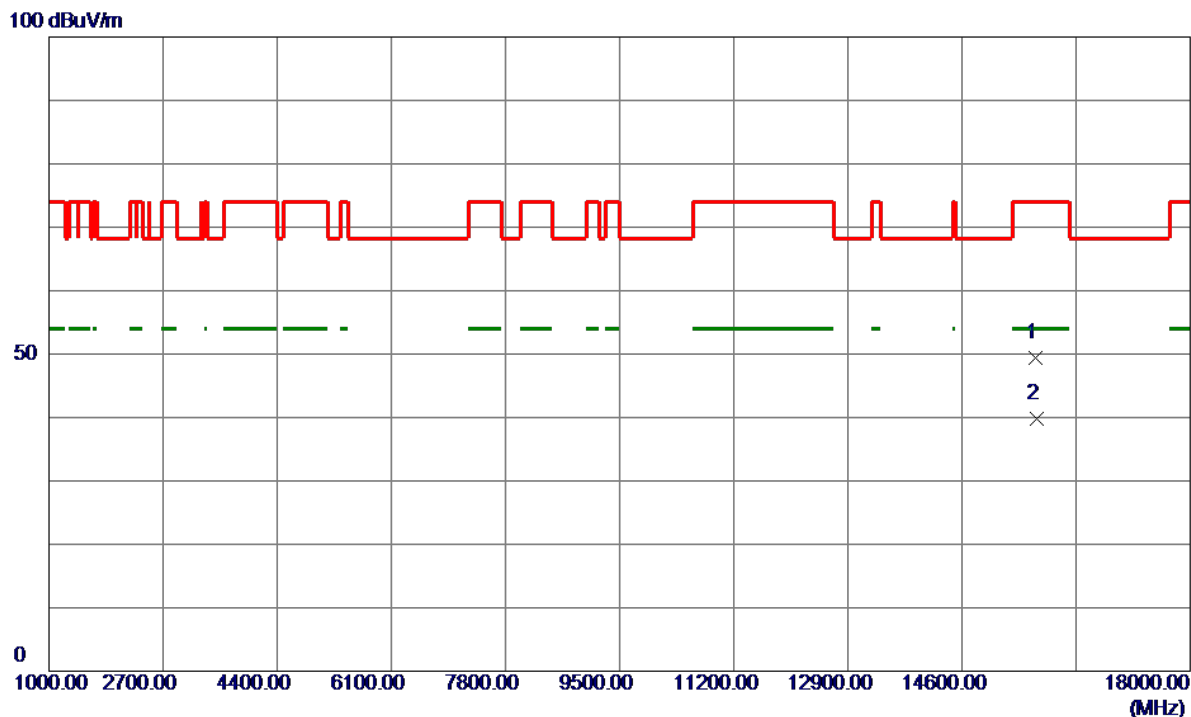


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15699.5000	36.59	12.76	49.35	74.00	-24.65	Peak	
2 *	15716.2000	26.95	12.78	39.73	54.00	-14.27	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

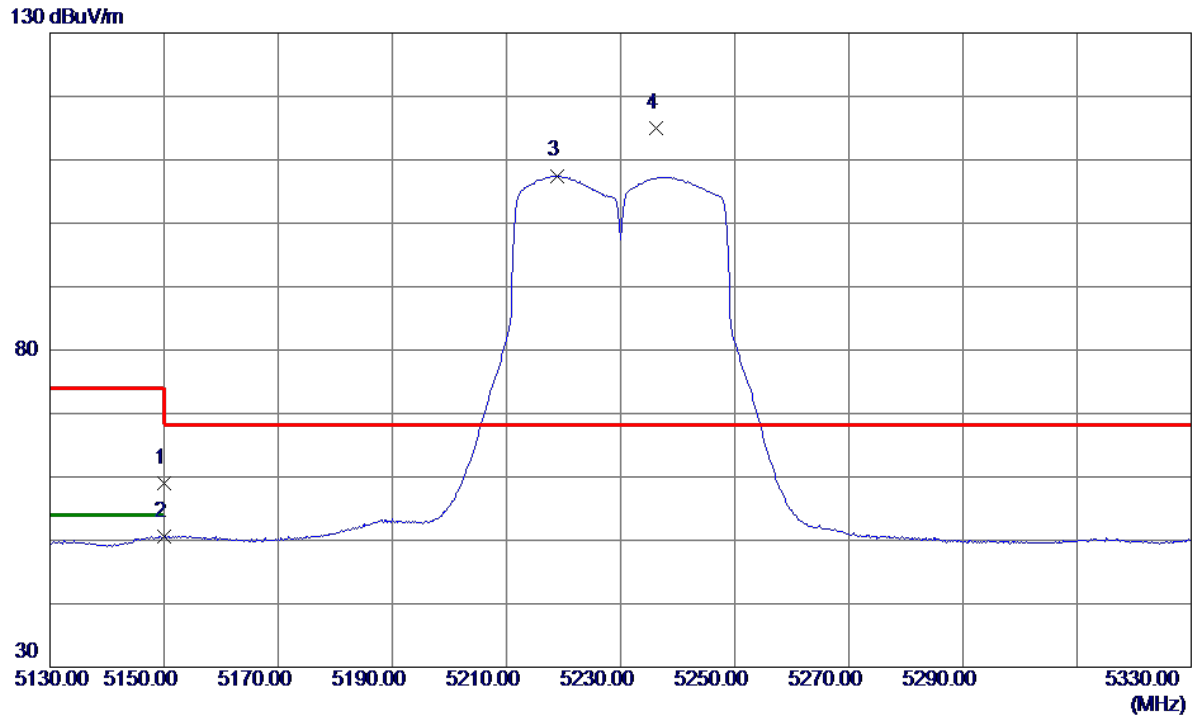


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	44.52	14.45	58.97	74.00	-15.03	Peak	
2	5150.0000	36.10	14.45	50.55	54.00	-3.45	AVG	
3	5218.8000	92.85	14.65	107.50	999.00	-891.50	AVG	No Limit
4 *	5236.2000	100.32	14.70	115.02	68.20	46.82	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

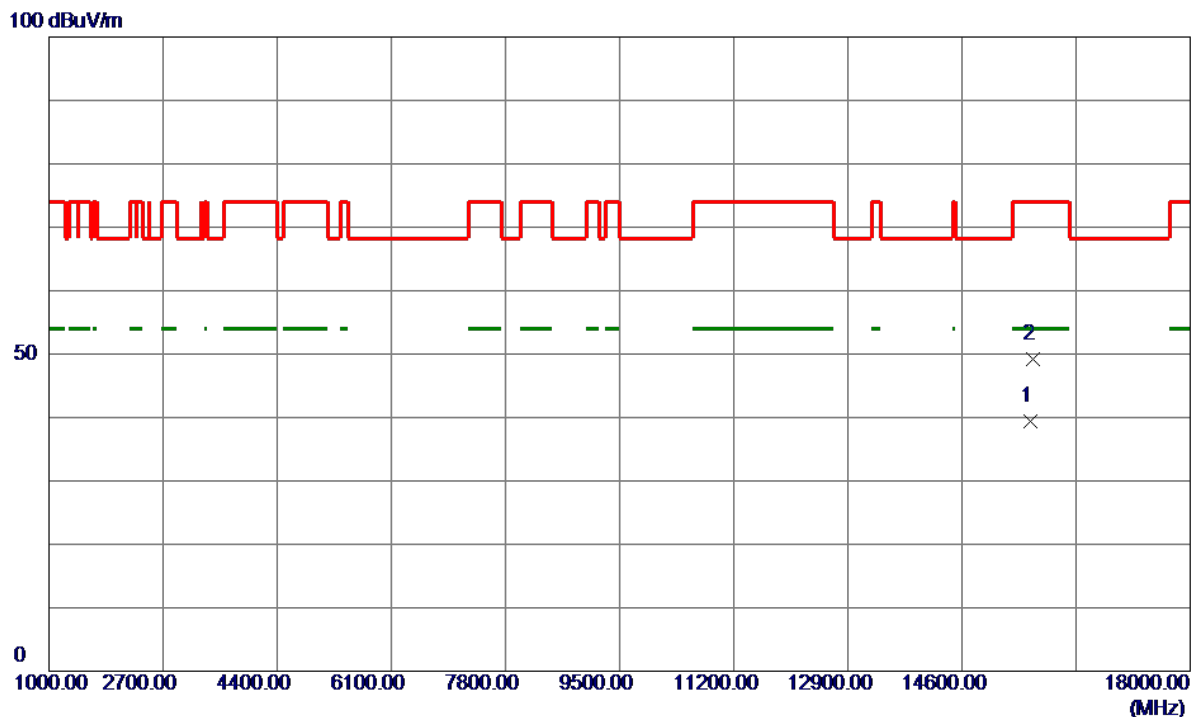


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15612.5000	26.76	12.69	39.45	54.00	-14.55	AVG	
2	15648.4000	36.44	12.72	49.16	74.00	-24.84	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

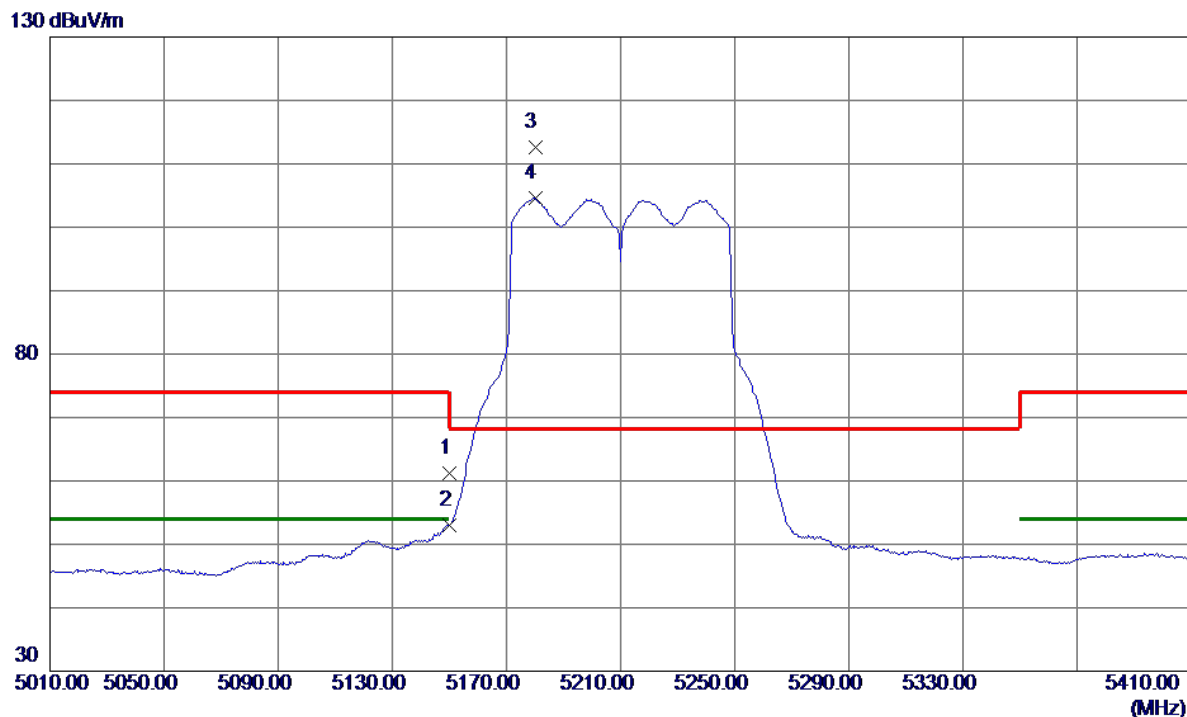


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	46.78	14.45	61.23	74.00	-12.77	Peak	
2	5150.0000	38.46	14.45	52.91	54.00	-1.09	AVG	
3 *	5180.0000	98.13	14.54	112.67	68.20	44.47	Peak	No Limit
4	5180.0000	90.01	14.54	104.55	999.00	-894.45	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

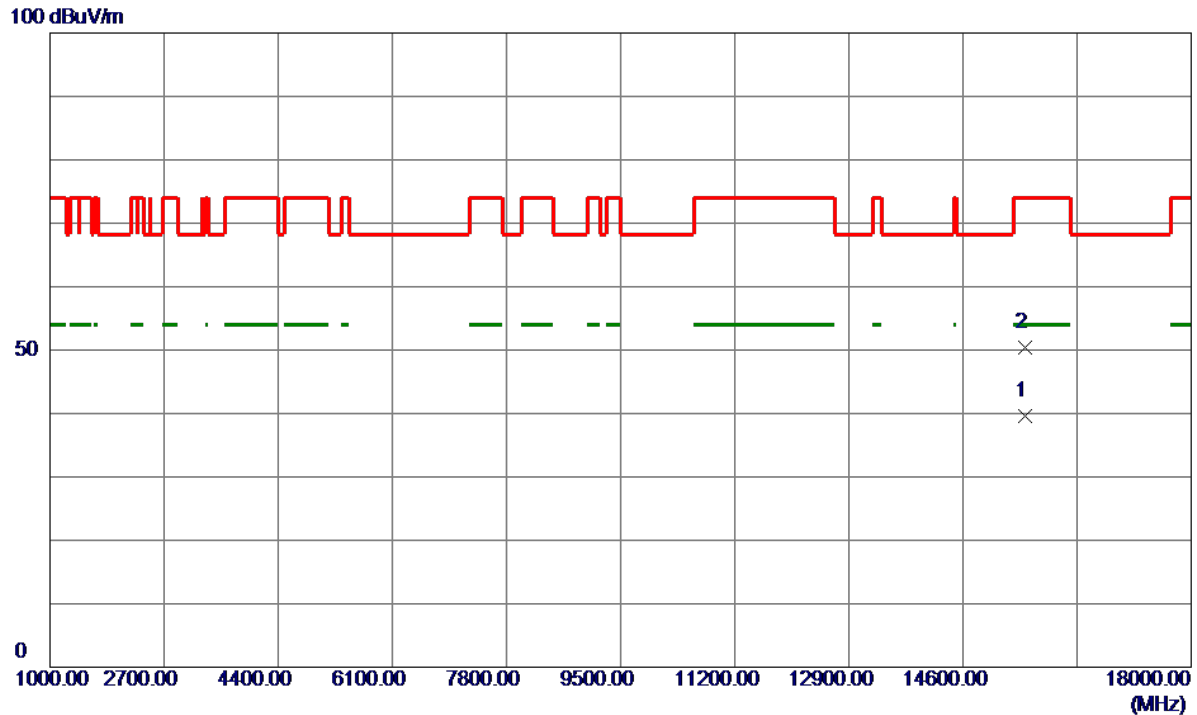


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15523.6500	26.89	12.62	39.51	54.00	-14.49	AVG	
2	15530.9000	37.84	12.63	50.47	74.00	-23.53	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5180 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

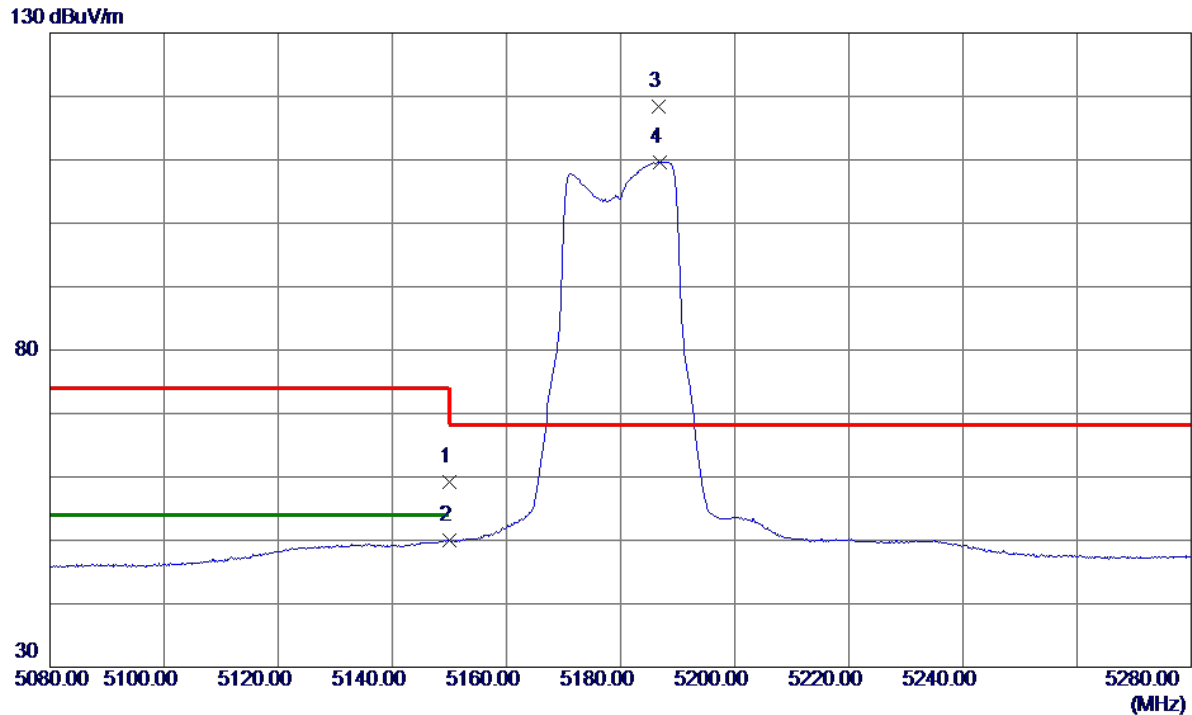


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	44.69	14.45	59.14	74.00	-14.86	Peak	
2	5150.0000	35.48	14.45	49.93	54.00	-4.07	AVG	
3 *	5186.6000	103.93	14.56	118.49	68.20	50.29	Peak	No Limit
4	5186.8000	95.07	14.56	109.63	999.00	-889.37	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

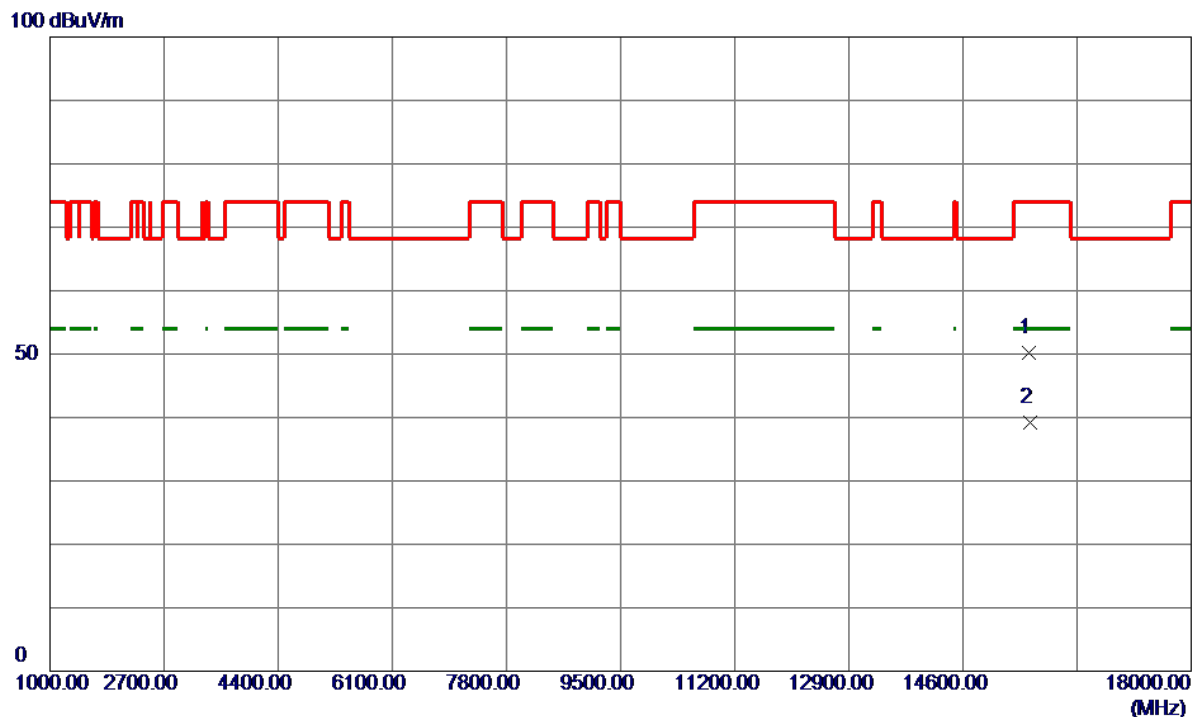


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15586.6000	37.62	12.67	50.29	74.00	-23.71	Peak	
2 *	15606.6500	26.58	12.69	39.27	54.00	-14.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5200 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

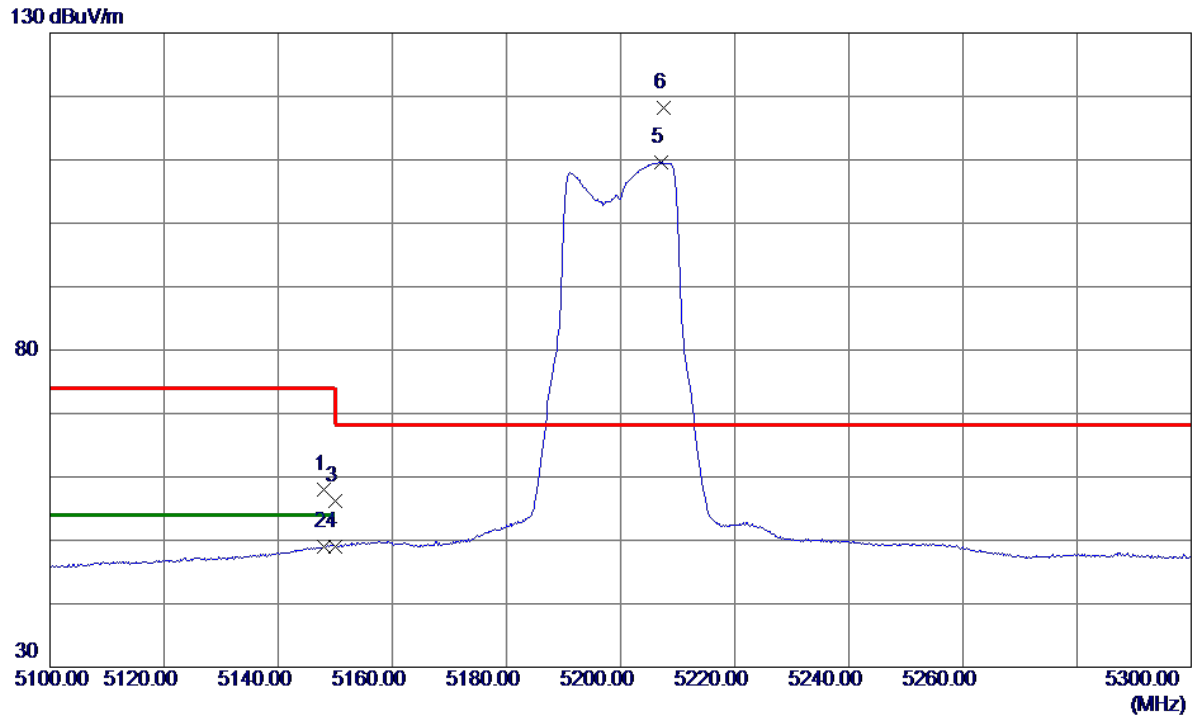


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5148.0000	43.62	14.44	58.06	74.00	-15.94	Peak	
2	5148.0000	34.55	14.44	48.99	54.00	-5.01	AVG	
3	5150.0000	41.79	14.45	56.24	74.00	-17.76	Peak	
4	5150.0000	34.48	14.45	48.93	54.00	-5.07	AVG	
5	5207.2000	95.02	14.61	109.63	999.00	-889.37	AVG	No Limit
6 *	5207.6000	103.54	14.62	118.16	68.20	49.96	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5240 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

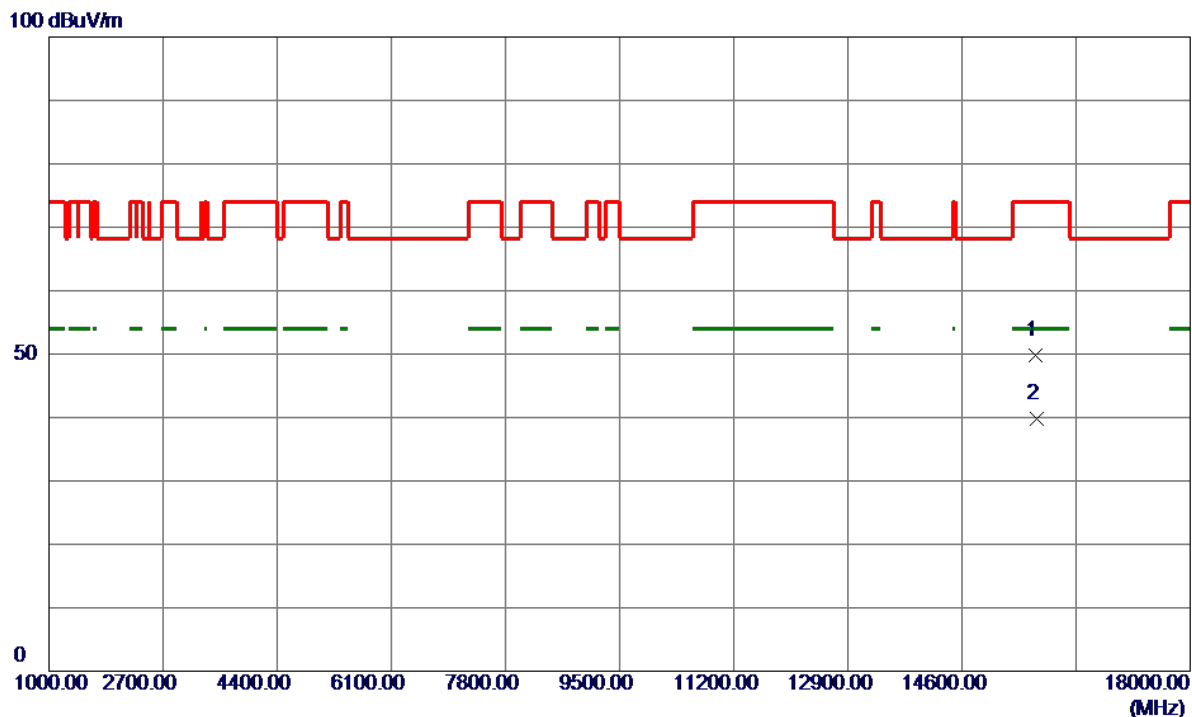


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15700.9000	37.02	12.76	49.78	74.00	-24.22	Peak	
2 *	15720.4000	27.00	12.78	39.78	54.00	-14.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

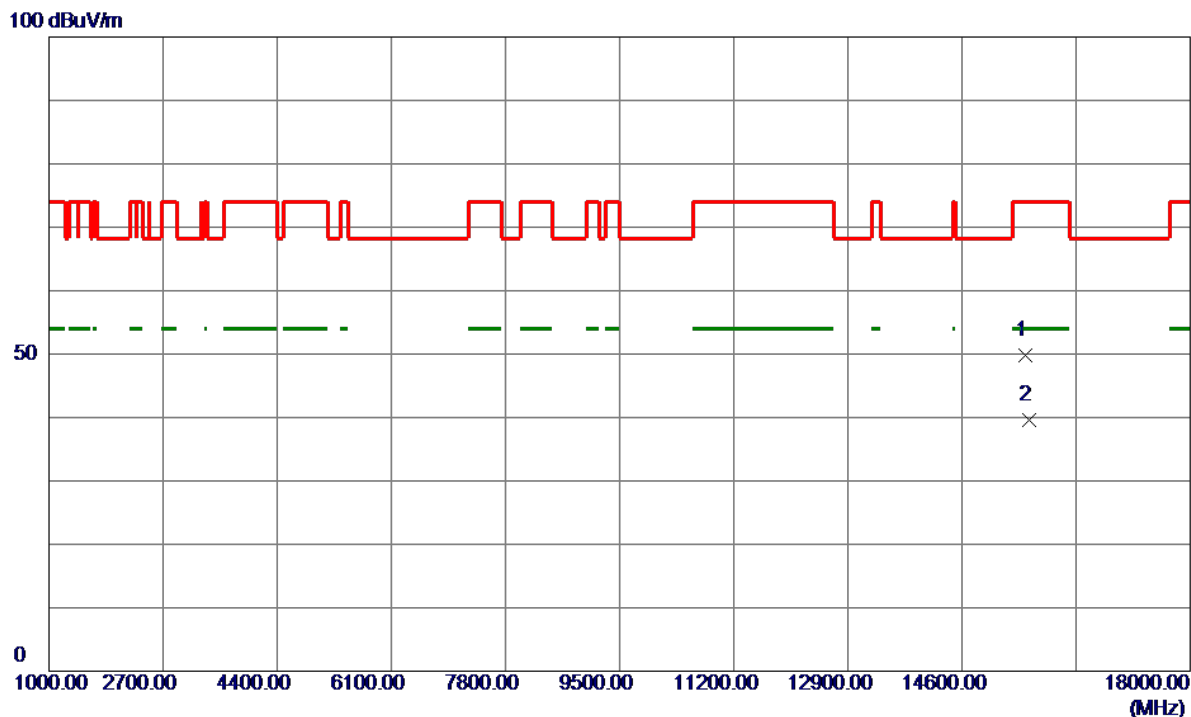


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15543.4000	37.17	12.64	49.81	74.00	-24.19	Peak	
2 *	15609.6000	26.92	12.69	39.61	54.00	-14.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT40) Mode 5190 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

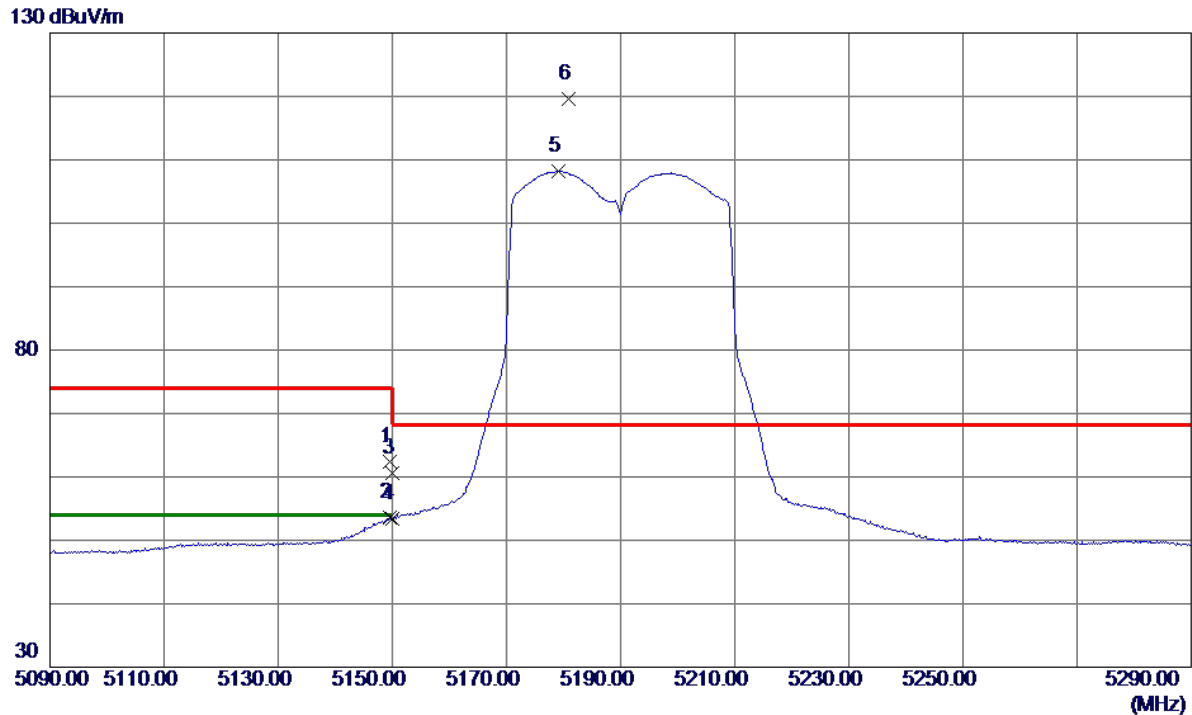


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.6000	48.04	14.45	62.49	74.00	-11.51	Peak	
2	5149.6000	39.20	14.45	53.65	54.00	-0.35	AVG	
3	5150.0000	46.15	14.45	60.60	74.00	-13.40	Peak	
4	5150.0000	38.89	14.45	53.34	54.00	-0.66	AVG	
5	5179.2000	93.70	14.53	108.23	999.00	-890.77	AVG	No Limit
6 *	5180.8000	104.97	14.54	119.51	68.20	51.31	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

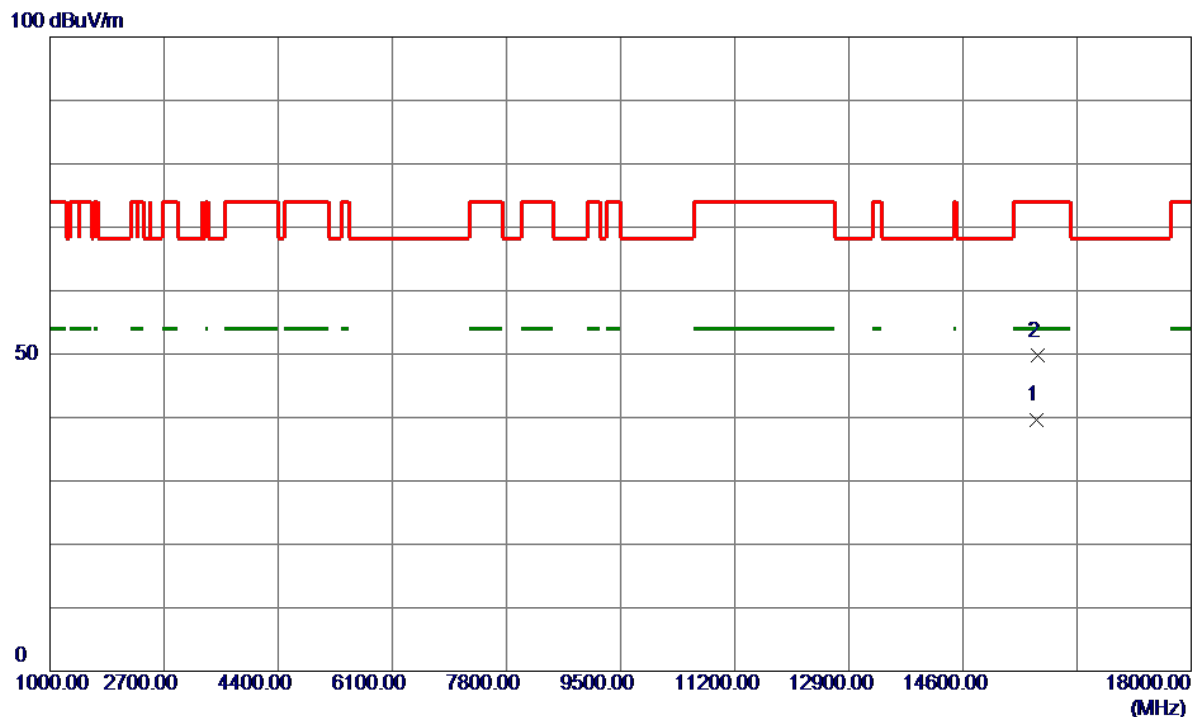


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15703.8000	26.82	12.77	39.59	54.00	-14.41	AVG	
2	15712.2000	36.93	12.77	49.70	74.00	-24.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT40) Mode 5230 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

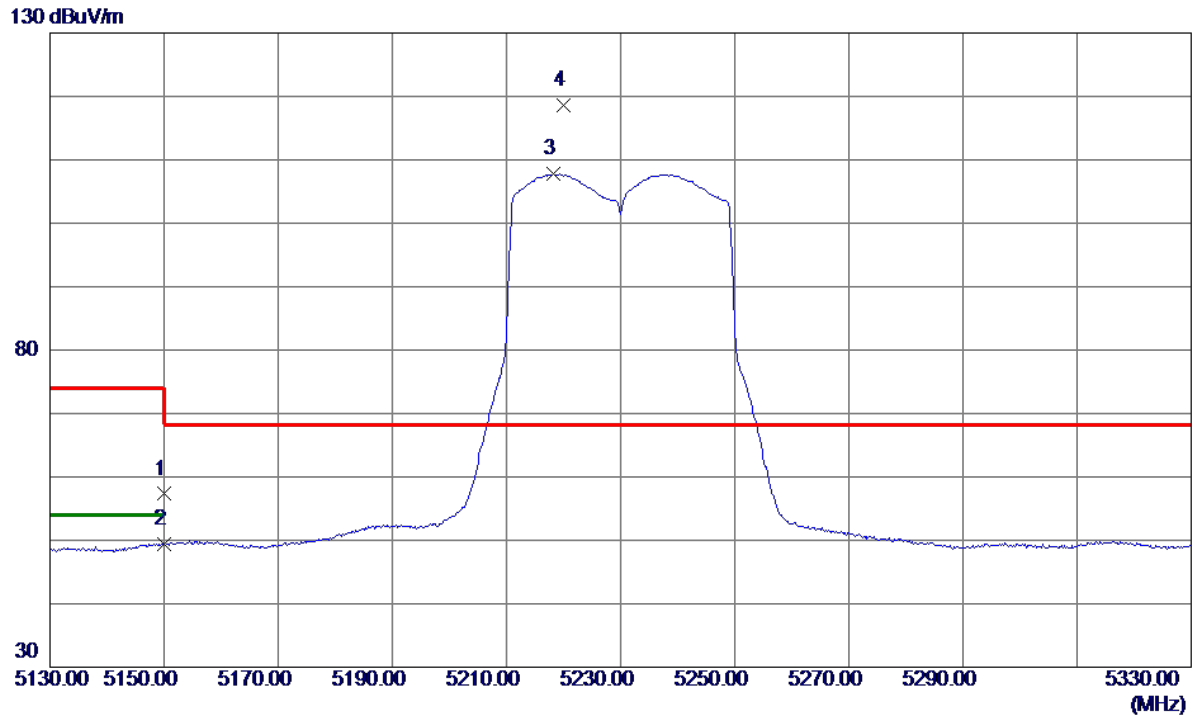


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	42.85	14.45	57.30	74.00	-16.70	Peak	
2	5150.0000	34.94	14.45	49.39	54.00	-4.61	AVG	
3	5218.2000	93.10	14.65	107.75	999.00	-891.25	AVG	No Limit
4 *	5220.0000	103.92	14.65	118.57	68.20	50.37	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

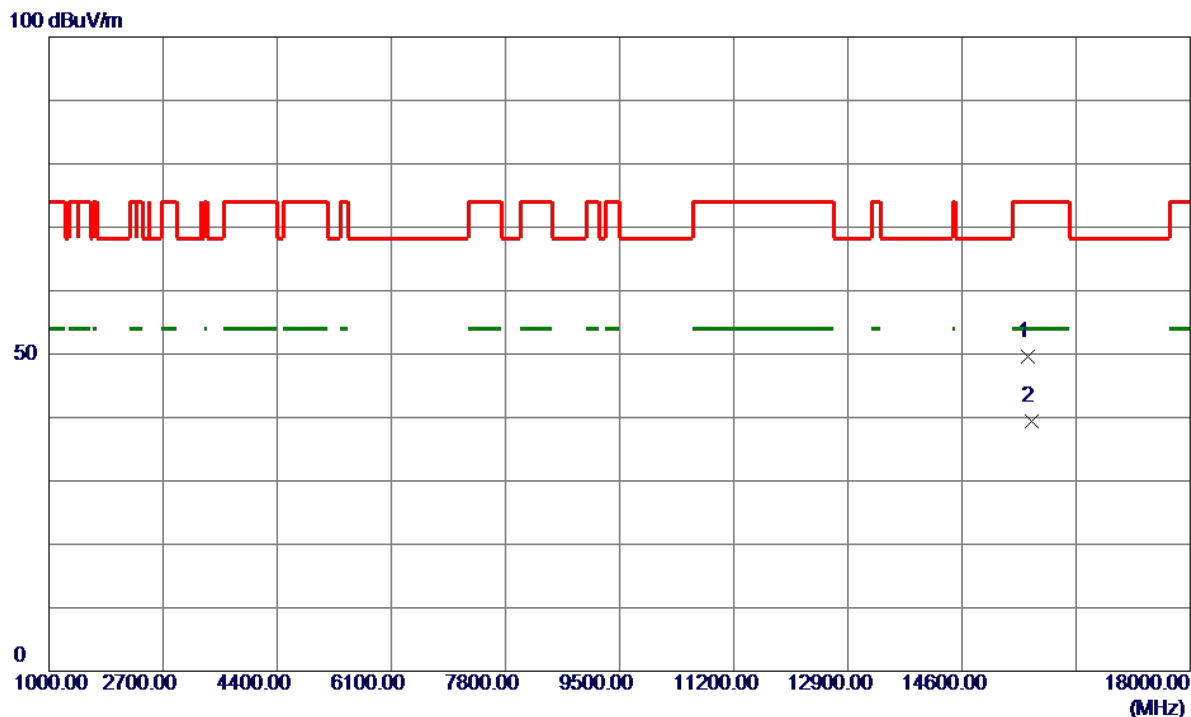


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15590.5000	36.91	12.68	49.59	74.00	-24.41	Peak	
2 *	15640.8000	26.76	12.72	39.48	54.00	-14.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT80) Mode 5210 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

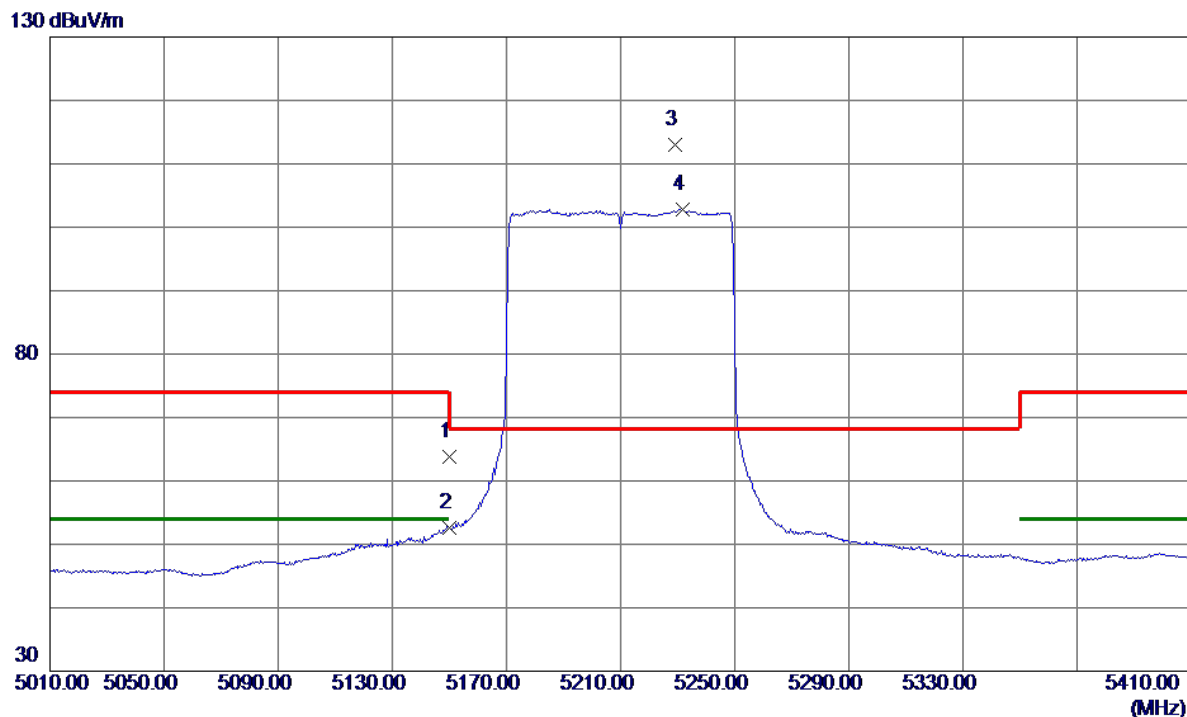


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	49.37	14.45	63.82	74.00	-10.18	Peak	
2	5150.0000	38.07	14.45	52.52	54.00	-1.48	AVG	
3 *	5229.2000	98.30	14.68	112.98	68.20	44.78	Peak	No Limit
4	5231.6000	88.17	14.68	102.85	999.00	-896.15	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

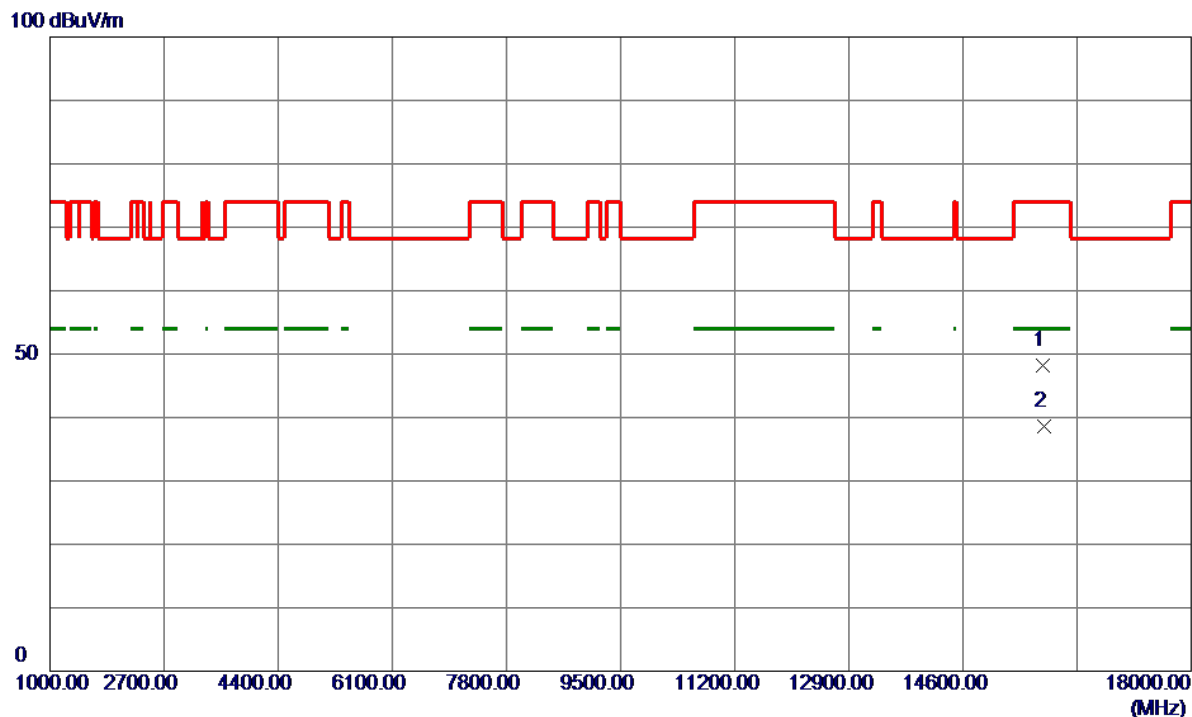


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15781.2500	35.44	12.83	48.27	74.00	-25.73	Peak	
2 *	15803.0000	25.77	12.84	38.61	54.00	-15.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

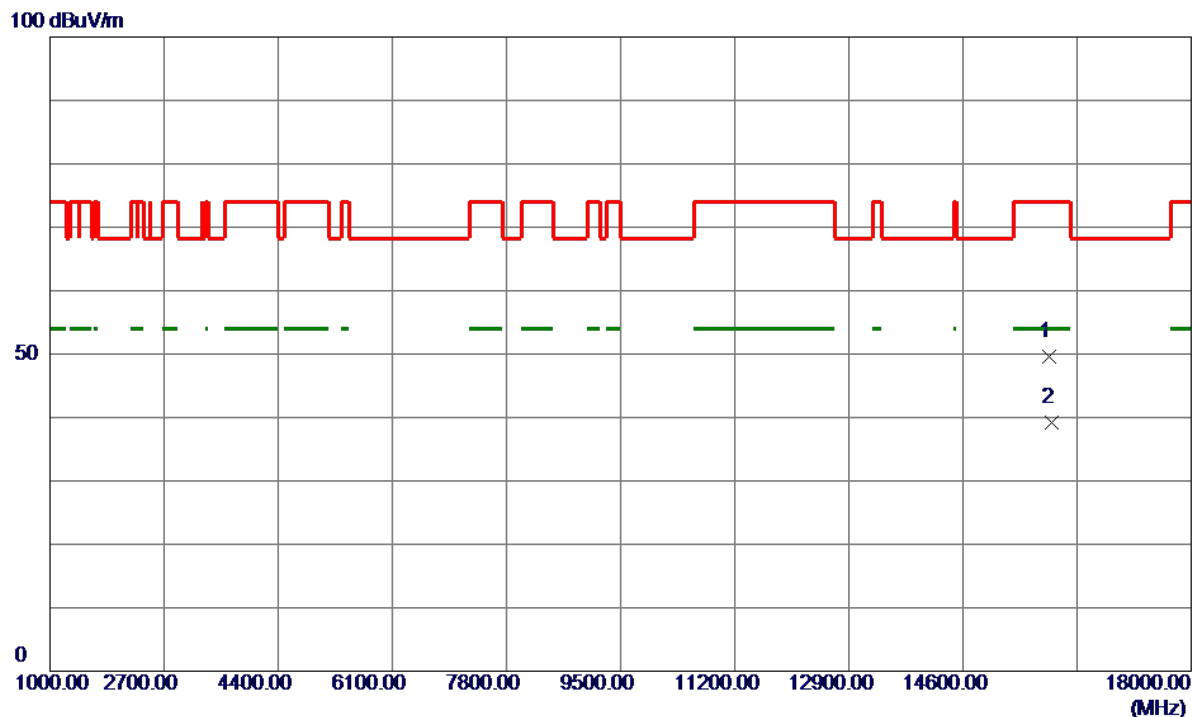


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15878.9500	36.66	12.90	49.56	74.00	-24.44	Peak	
2 *	15920.6000	26.19	12.94	39.13	54.00	-14.87	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

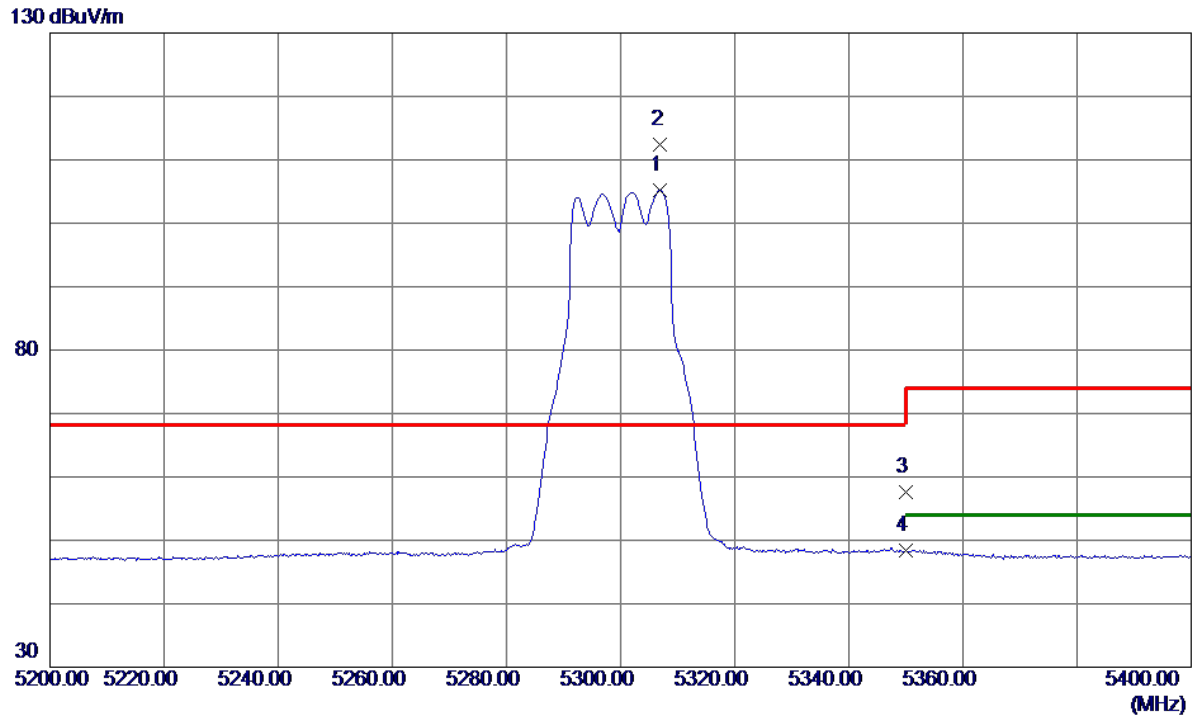


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5306.8000	90.32	14.90	105.22	999.00	-893.78	AVG	No Limit
2 *	5307.0000	97.58	14.90	112.48	68.20	44.28	Peak	No Limit
3	5350.0000	42.63	15.02	57.65	74.00	-16.35	Peak	
4	5350.0000	33.45	15.02	48.47	54.00	-5.53	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

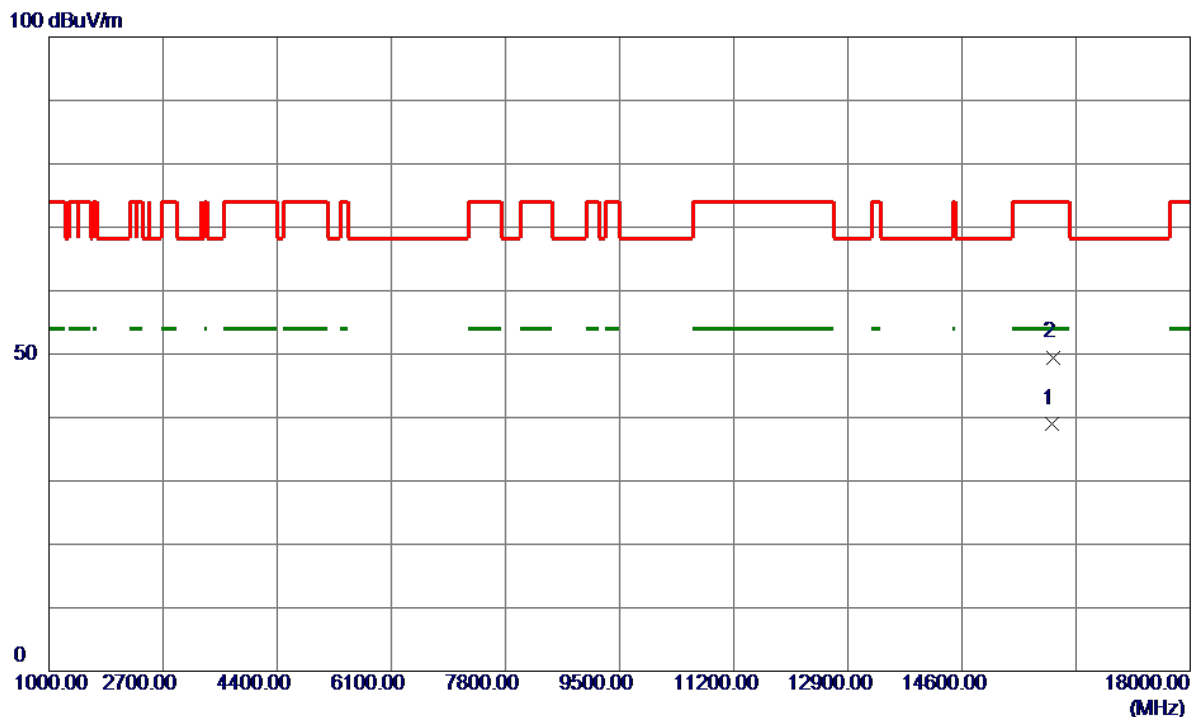


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15936.8500	26.14	12.95	39.09	54.00	-14.91	AVG	
2	15967.3000	36.53	12.97	49.50	74.00	-24.50	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

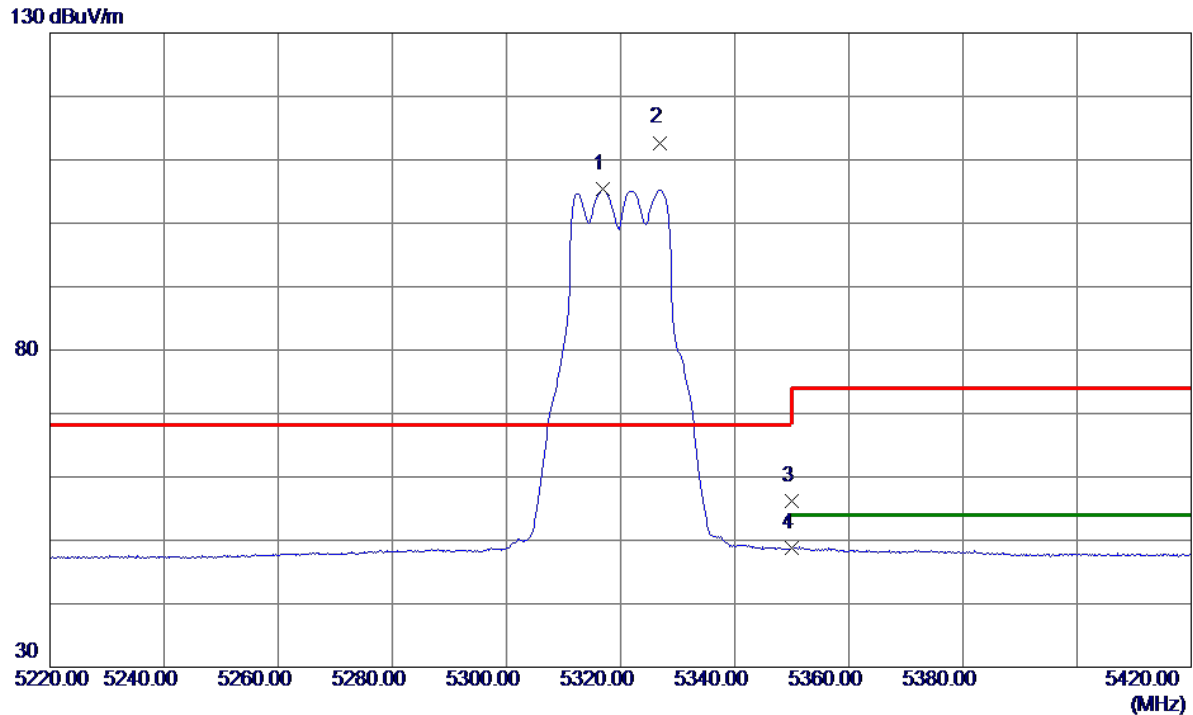


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5316.8000	90.42	14.93	105.35	999.00	-893.65	AVG	No Limit
2 *	5326.8000	97.74	14.96	112.70	68.20	44.50	Peak	No Limit
3	5350.0000	41.15	15.02	56.17	74.00	-17.83	Peak	
4	5350.0000	33.84	15.02	48.86	54.00	-5.14	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5260 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

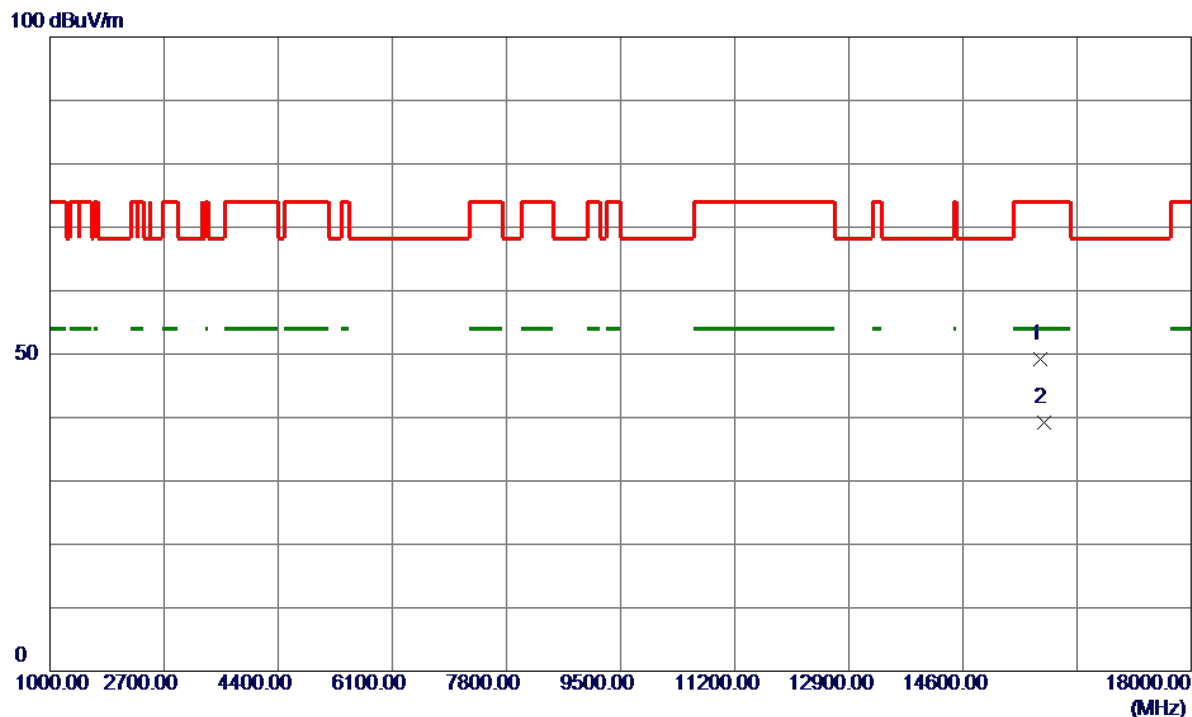


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15757.4500	36.47	12.81	49.28	74.00	-24.72	Peak	
2 *	15803.9000	26.36	12.84	39.20	54.00	-14.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

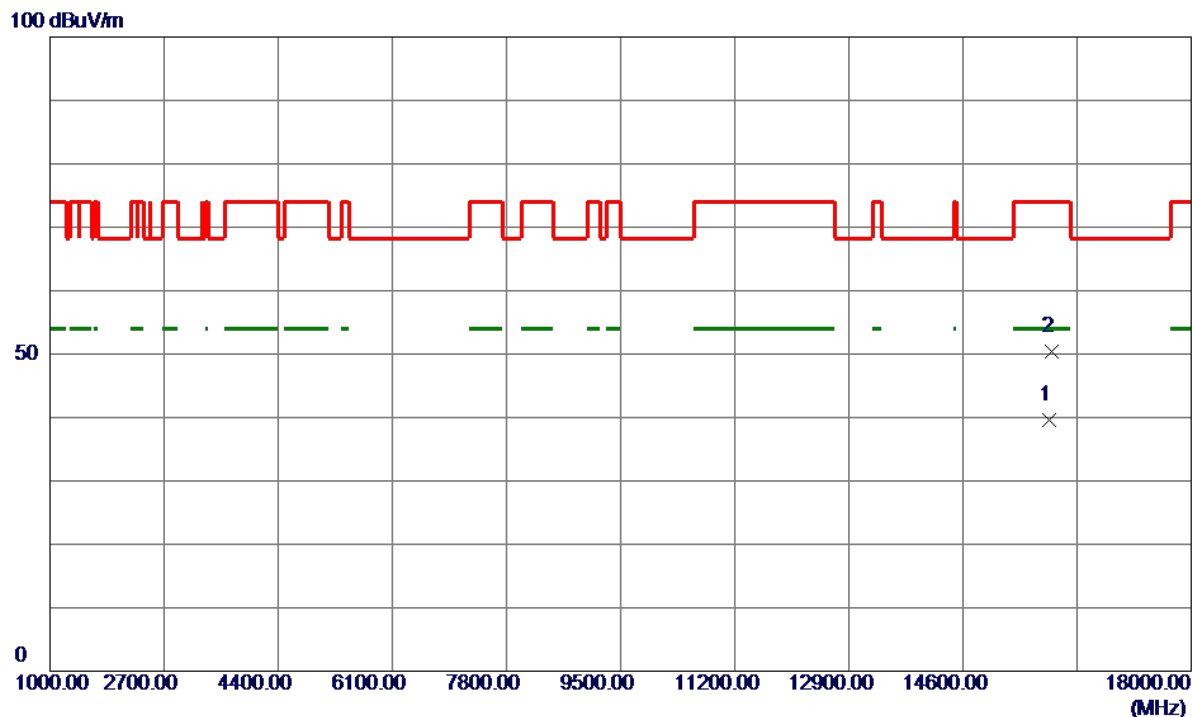


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15882.3500	26.66	12.91	39.57	54.00	-14.43	AVG	
2	15920.9500	37.52	12.94	50.46	74.00	-23.54	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

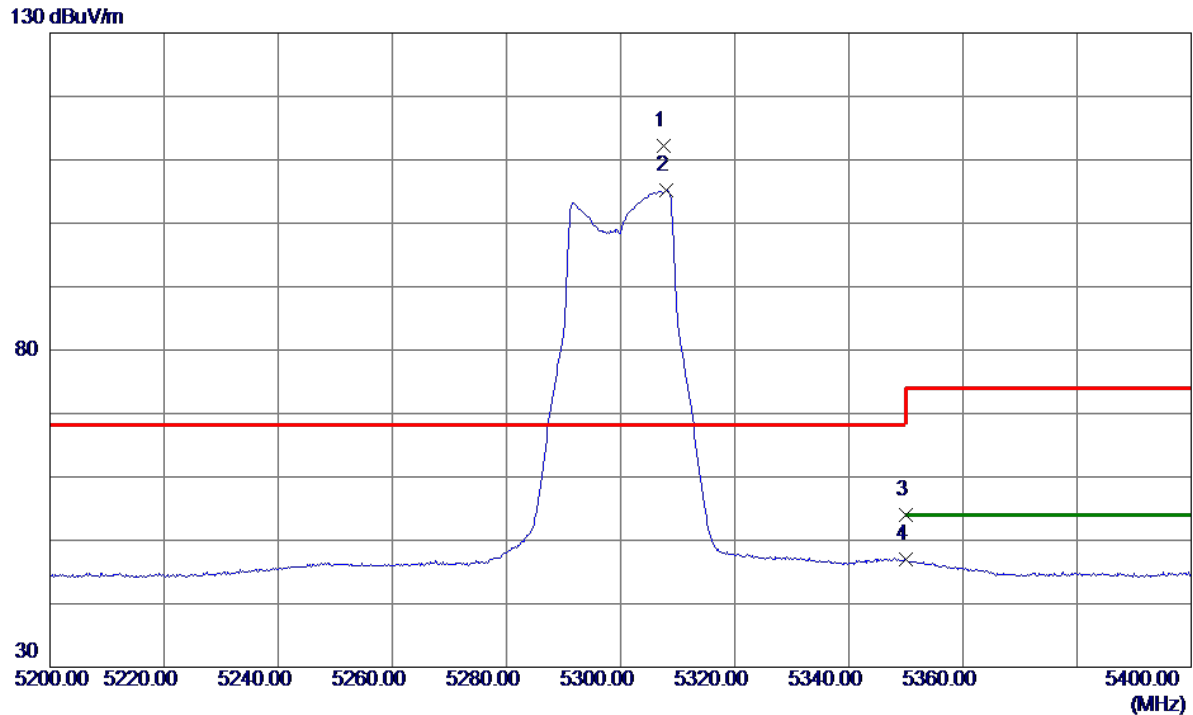


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5307.6000	97.38	14.90	112.28	68.20	44.08	Peak	No Limit
2	5308.0000	90.30	14.90	105.20	999.00	-893.80	AVG	No Limit
3	5350.0000	38.90	15.02	53.92	74.00	-20.08	Peak	
4	5350.0000	31.91	15.02	46.93	54.00	-7.07	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

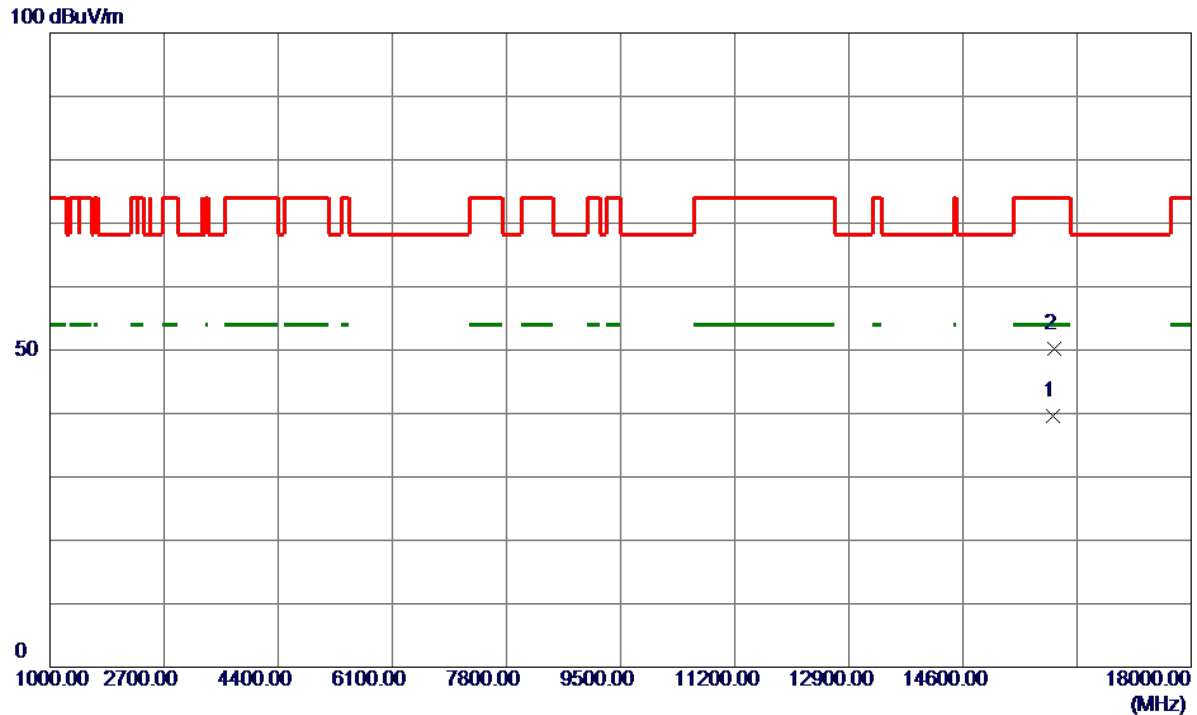


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15937.4000	26.73	12.95	39.68	54.00	-14.32	AVG	
2	15962.0000	37.16	12.97	50.13	74.00	-23.87	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

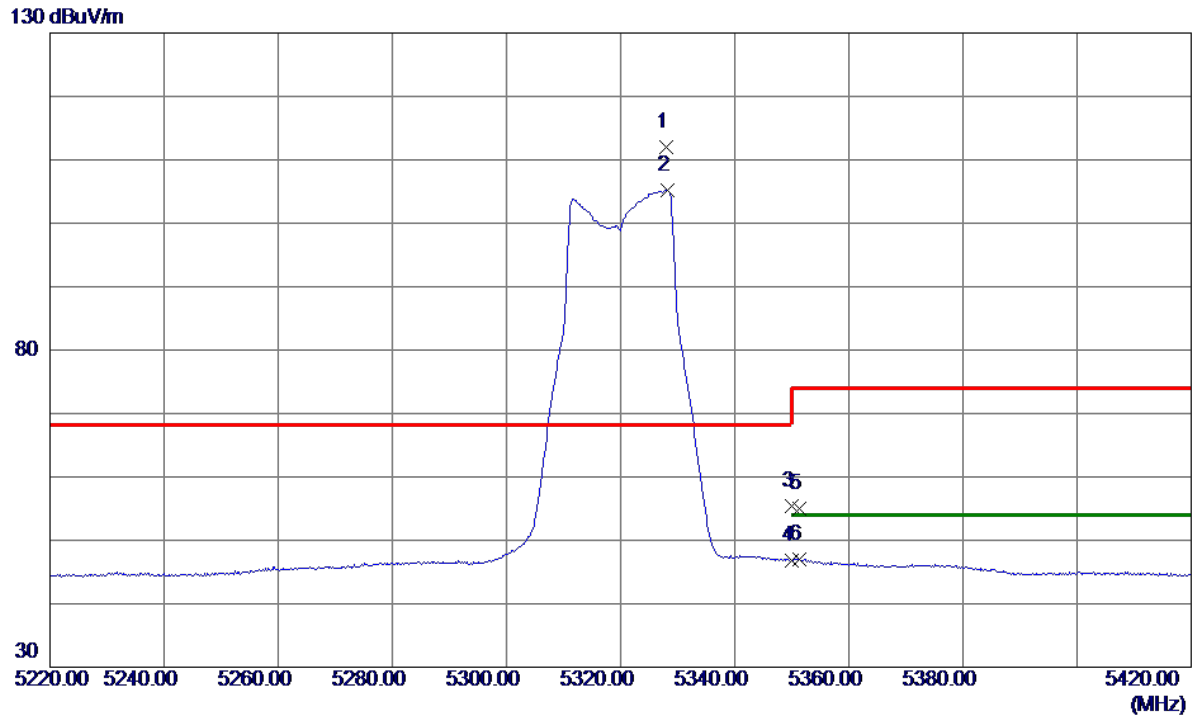


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5328.0000	97.09	14.96	112.05	68.20	43.85	Peak	No Limit
2	5328.2000	90.29	14.96	105.25	999.00	-893.75	AVG	No Limit
3	5350.0000	40.29	15.02	55.31	74.00	-18.69	Peak	
4	5350.0000	31.75	15.02	46.77	54.00	-7.23	AVG	
5	5351.4000	40.02	15.03	55.05	74.00	-18.95	Peak	
6	5351.4000	32.01	15.03	47.04	54.00	-6.96	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

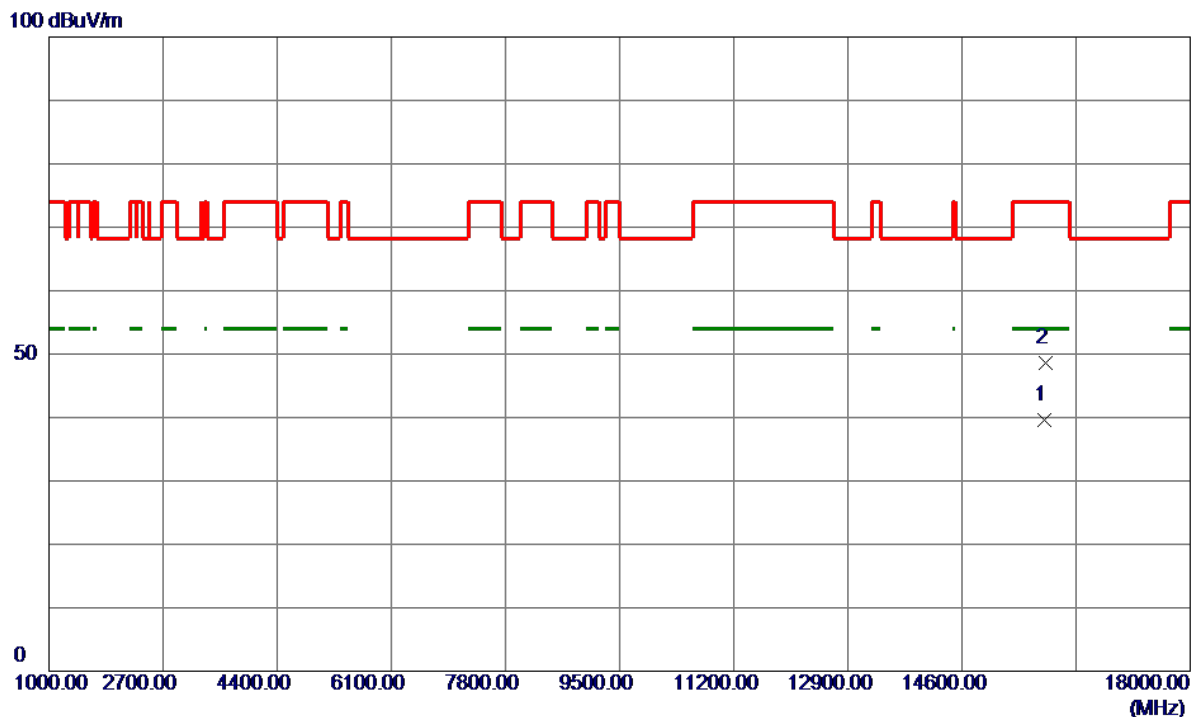


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15836.8000	26.71	12.87	39.58	54.00	-14.42	AVG	
2	15844.0000	35.70	12.88	48.58	74.00	-25.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

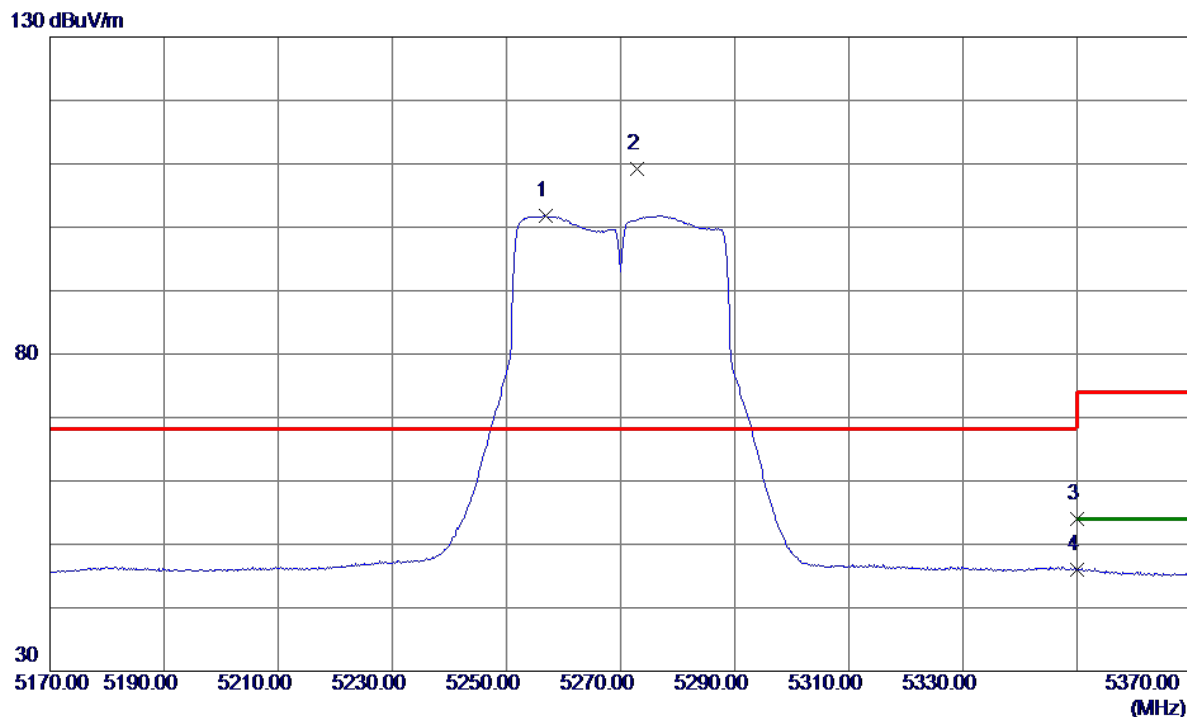


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5256.8000	87.05	14.76	101.81	999.00	-897.19	AVG	No Limit
2 *	5272.8000	94.36	14.80	109.16	68.20	40.96	Peak	No Limit
3	5350.0000	39.07	15.02	54.09	74.00	-19.91	Peak	
4	5350.0000	30.94	15.02	45.96	54.00	-8.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

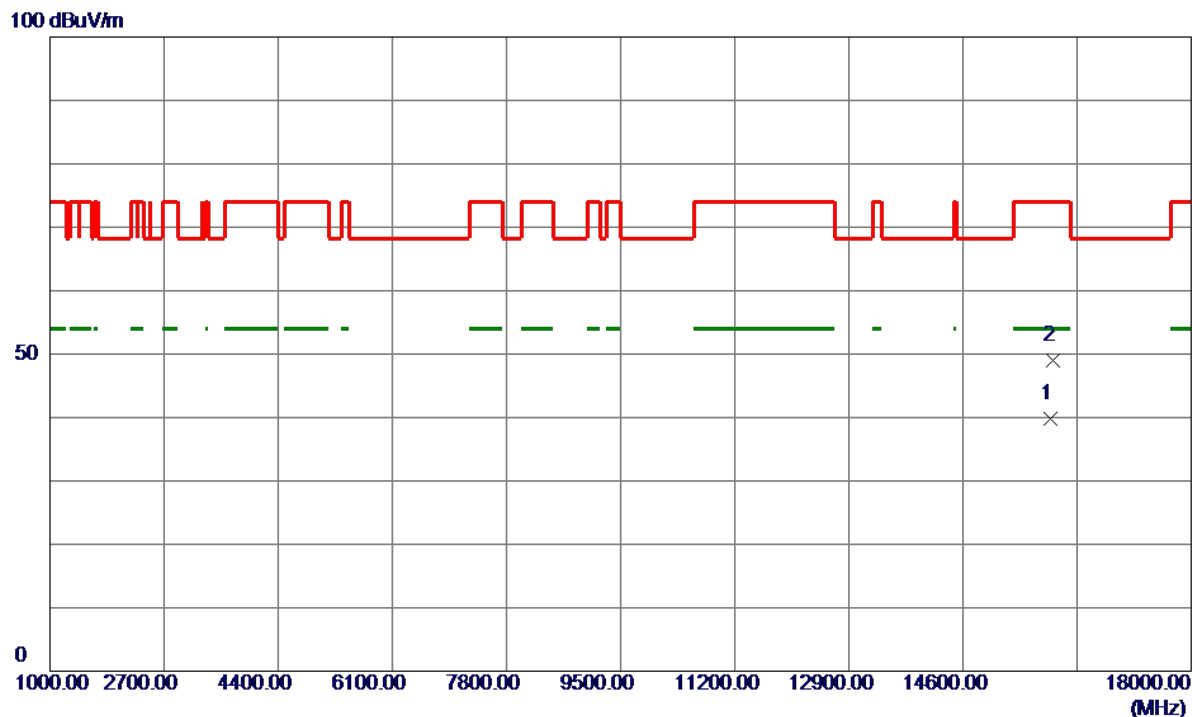


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15903.1000	26.90	12.92	39.82	54.00	-14.18	AVG	
2	15933.4000	36.11	12.95	49.06	74.00	-24.94	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

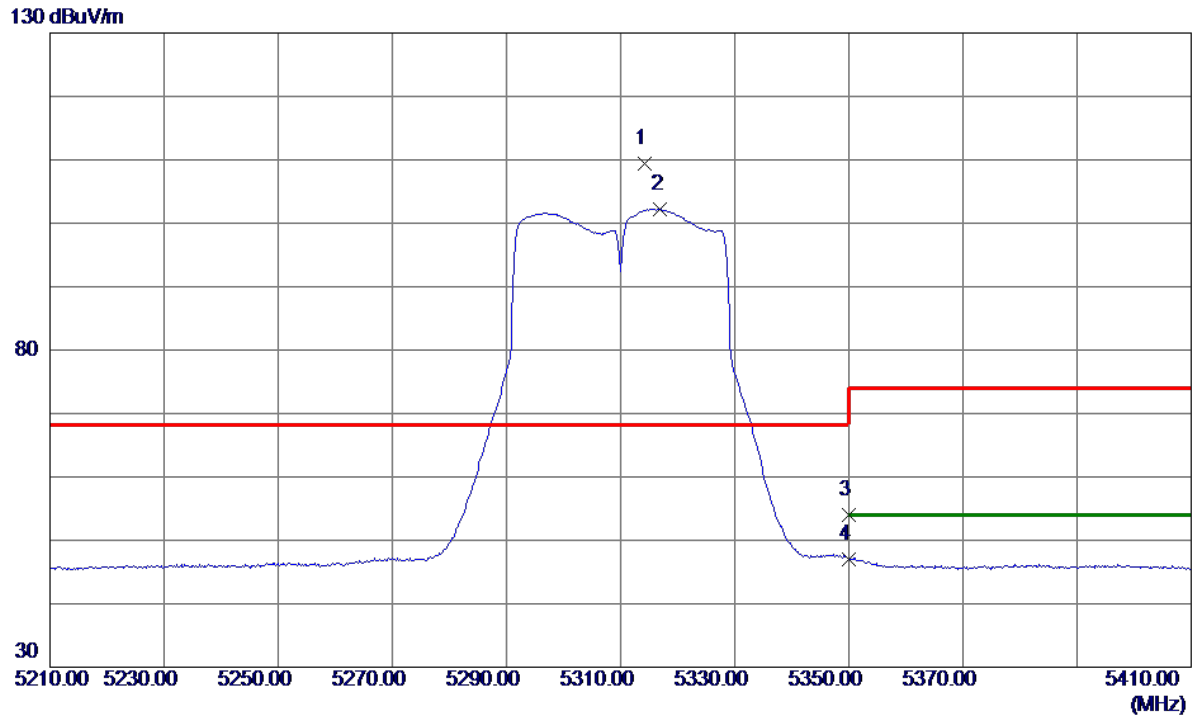


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5314.2000	94.46	14.92	109.38	68.20	41.18	Peak	No Limit
2	5317.0000	87.31	14.93	102.24	999.00	-896.76	AVG	No Limit
3	5350.0000	38.95	15.02	53.97	74.00	-20.03	Peak	
4	5350.0000	31.98	15.02	47.00	54.00	-7.00	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

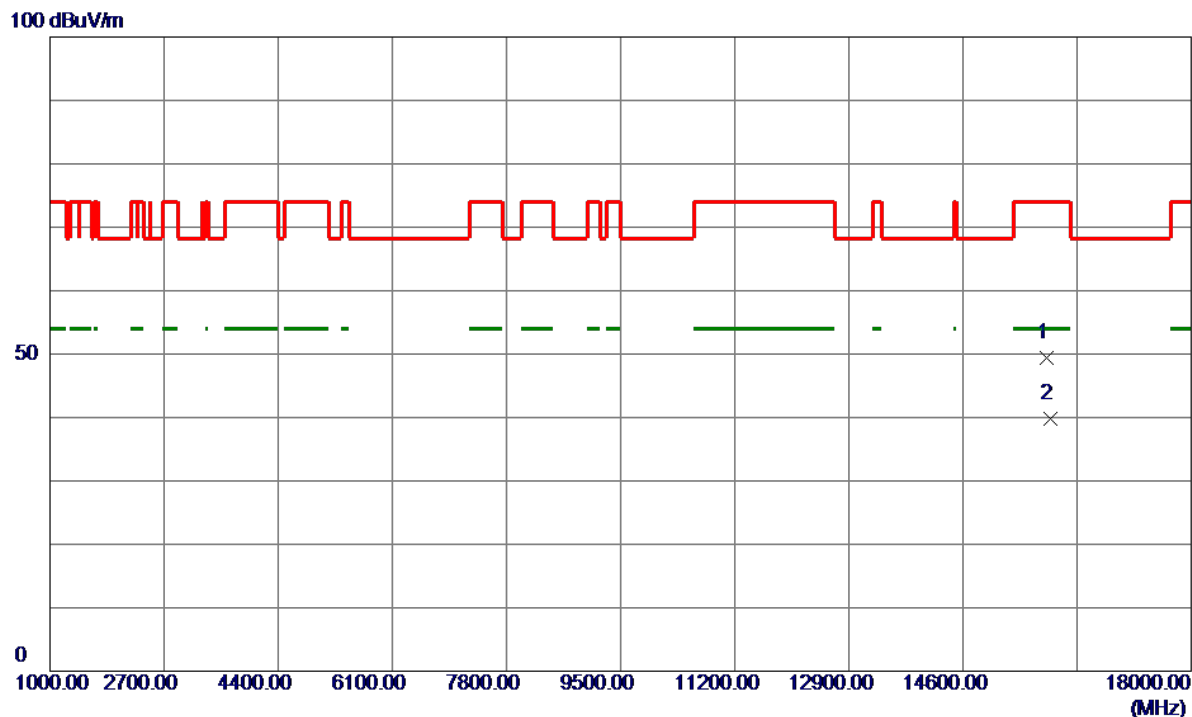


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15853.9000	36.45	12.88	49.33	74.00	-24.67	Peak	
2 *	15907.1000	26.82	12.93	39.75	54.00	-14.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

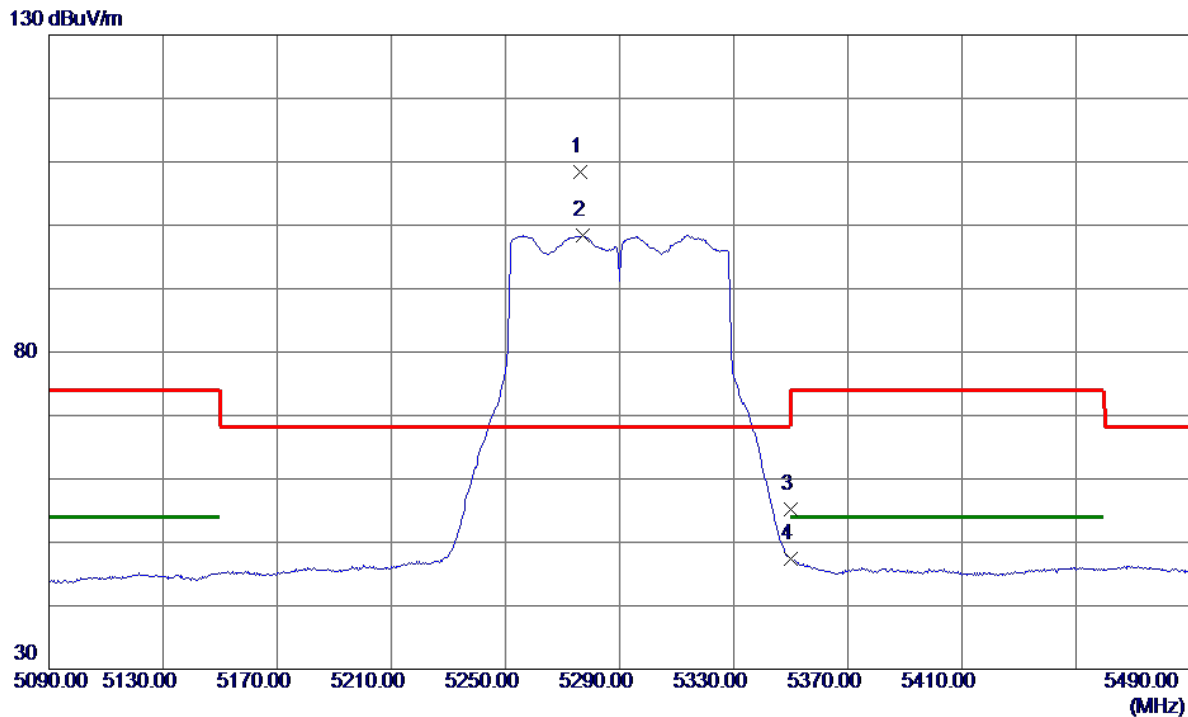


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5276.4000	93.52	14.81	108.33	68.20	40.13	Peak	No Limit
2	5277.2000	83.55	14.82	98.37	999.00	-900.63	AVG	No Limit
3	5350.0000	40.21	15.02	55.23	74.00	-18.77	Peak	
4	5350.0000	32.33	15.02	47.35	54.00	-6.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT20) Mode 5260 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

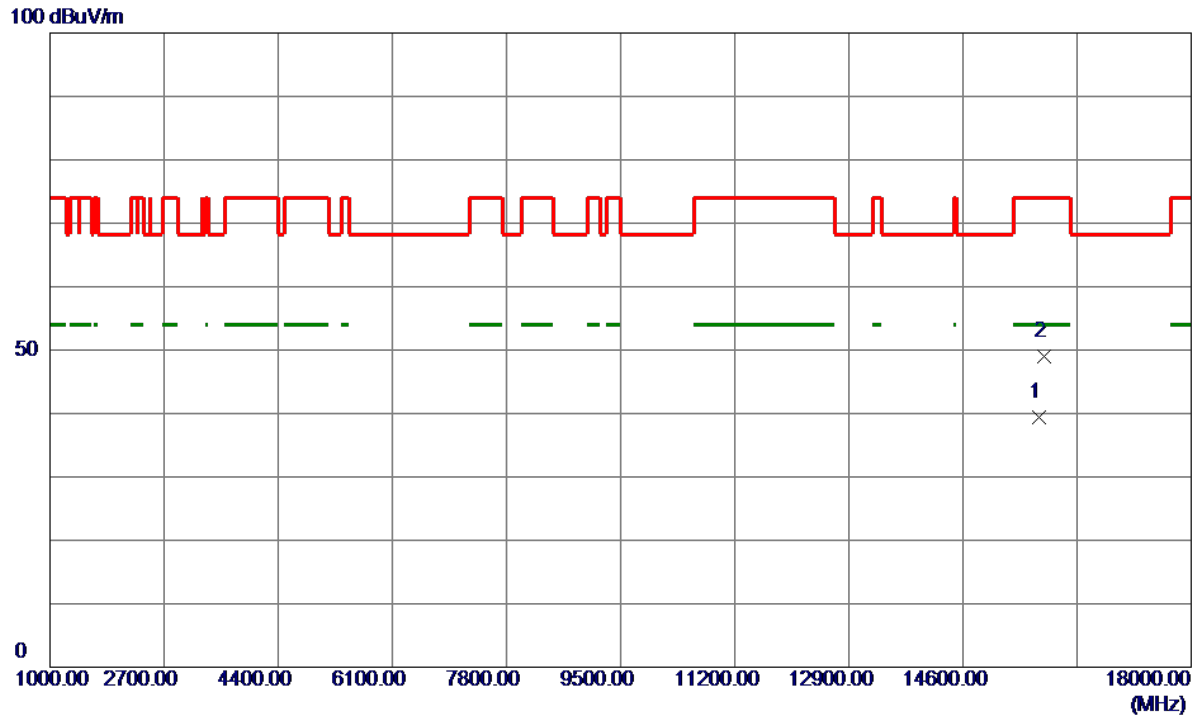


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15731.7000	26.63	12.79	39.42	54.00	-14.58	AVG	
2	15810.0000	36.21	12.85	49.06	74.00	-24.94	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT20) Mode 5300 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

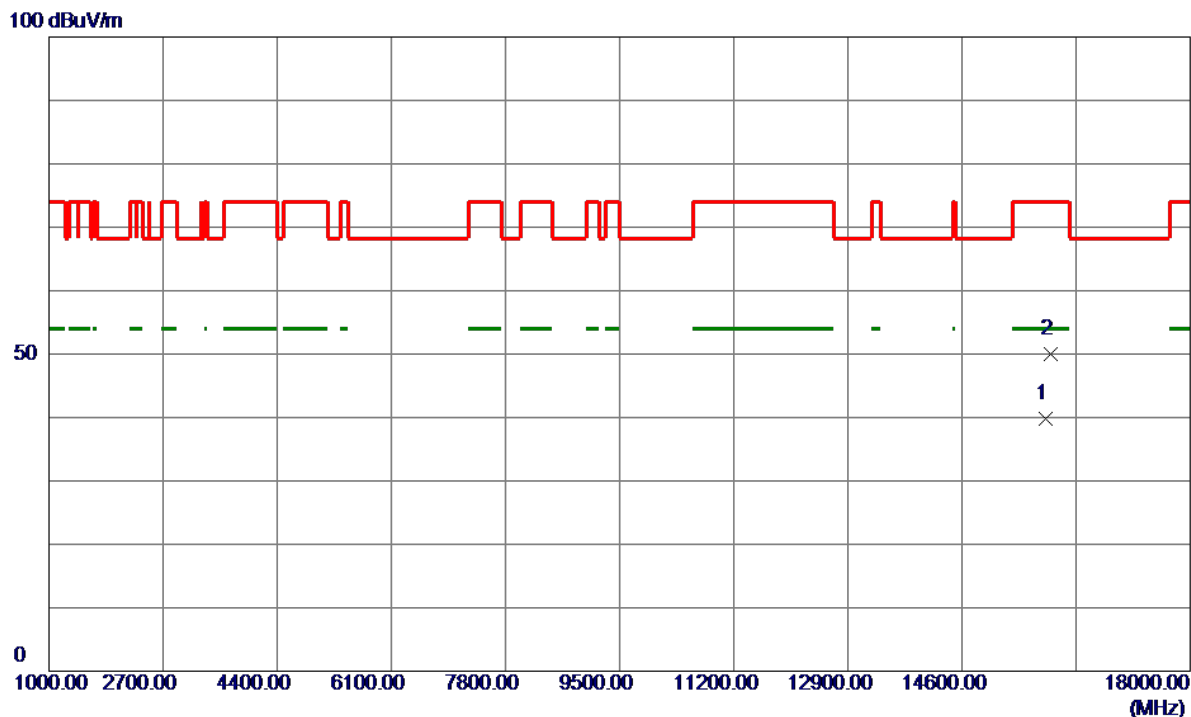

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15855.5000	26.93	12.89	39.82	54.00	-14.18	AVG	
2	15930.6000	36.98	12.94	49.92	74.00	-24.08	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	5306.6000	99.95	14.90	114.85	68.20	46.65	Peak	No Limit
2	5308.0000	89.79	14.90	104.69	999.00	-894.31	AVG	No Limit
3	5350.0000	39.95	15.02	54.97	74.00	-19.03	Peak	
4	5350.0000	32.32	15.02	47.34	54.00	-6.66	AVG	
5	5351.2000	40.59	15.03	55.62	74.00	-18.38	Peak	
6	5351.2000	32.60	15.03	47.63	54.00	-6.37	AVG	

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT20) Mode 5320 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

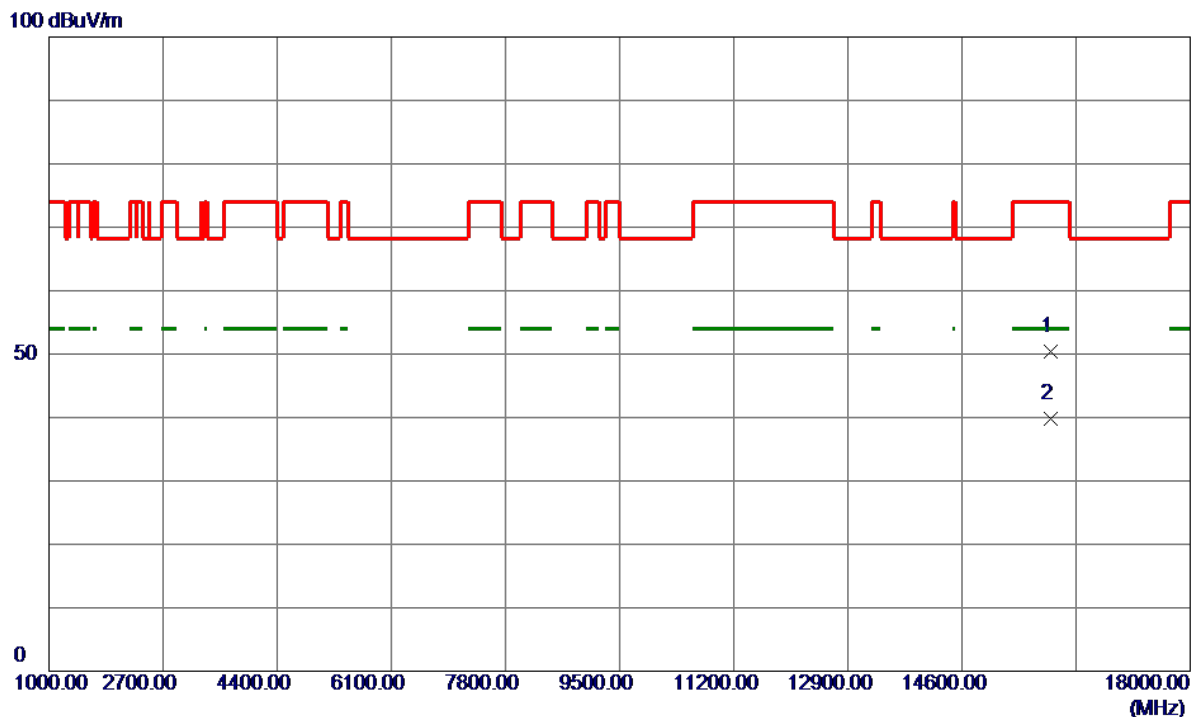


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15921.4000	37.49	12.94	50.43	74.00	-23.57	Peak	
2 *	15923.0000	26.79	12.94	39.73	54.00	-14.27	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT20) Mode 5320 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

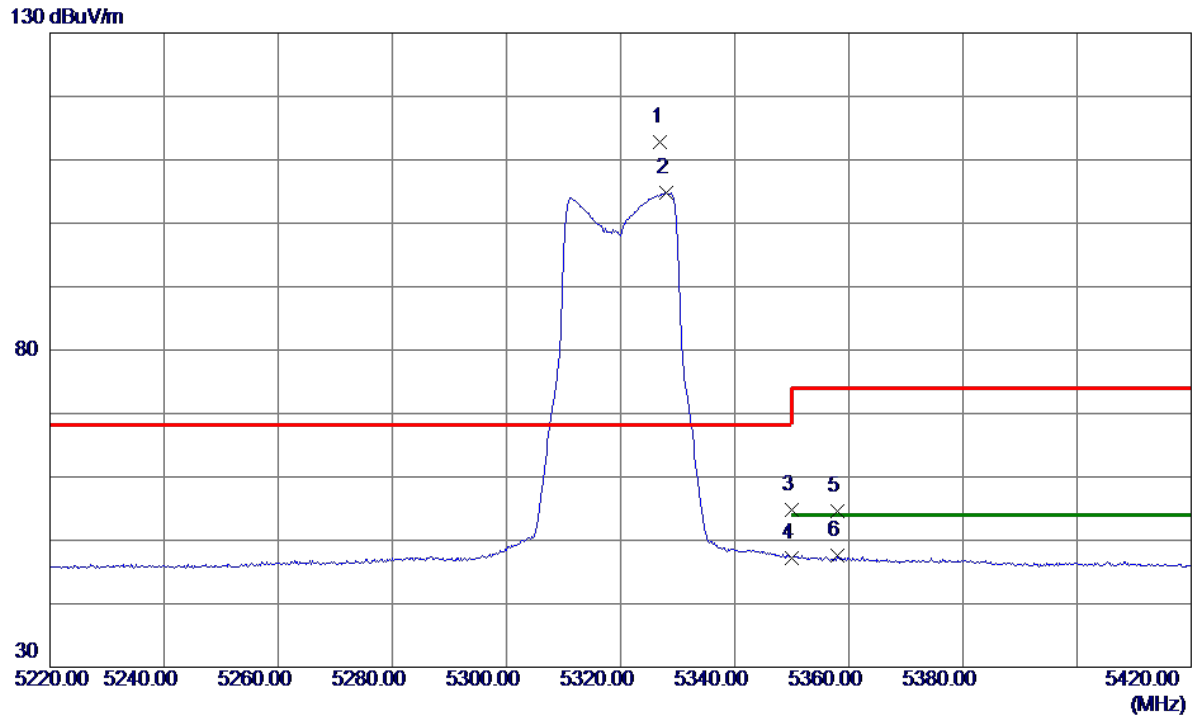


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5327.0000	97.88	14.96	112.84	68.20	44.64	Peak	No Limit
2	5328.0000	89.86	14.96	104.82	999.00	-894.18	AVG	No Limit
3	5350.0000	39.78	15.02	54.80	74.00	-19.20	Peak	
4	5350.0000	32.15	15.02	47.17	54.00	-6.83	AVG	
5	5358.0000	39.47	15.05	54.52	74.00	-19.48	Peak	
6	5358.0000	32.51	15.05	47.56	54.00	-6.44	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT40) Mode 5270 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

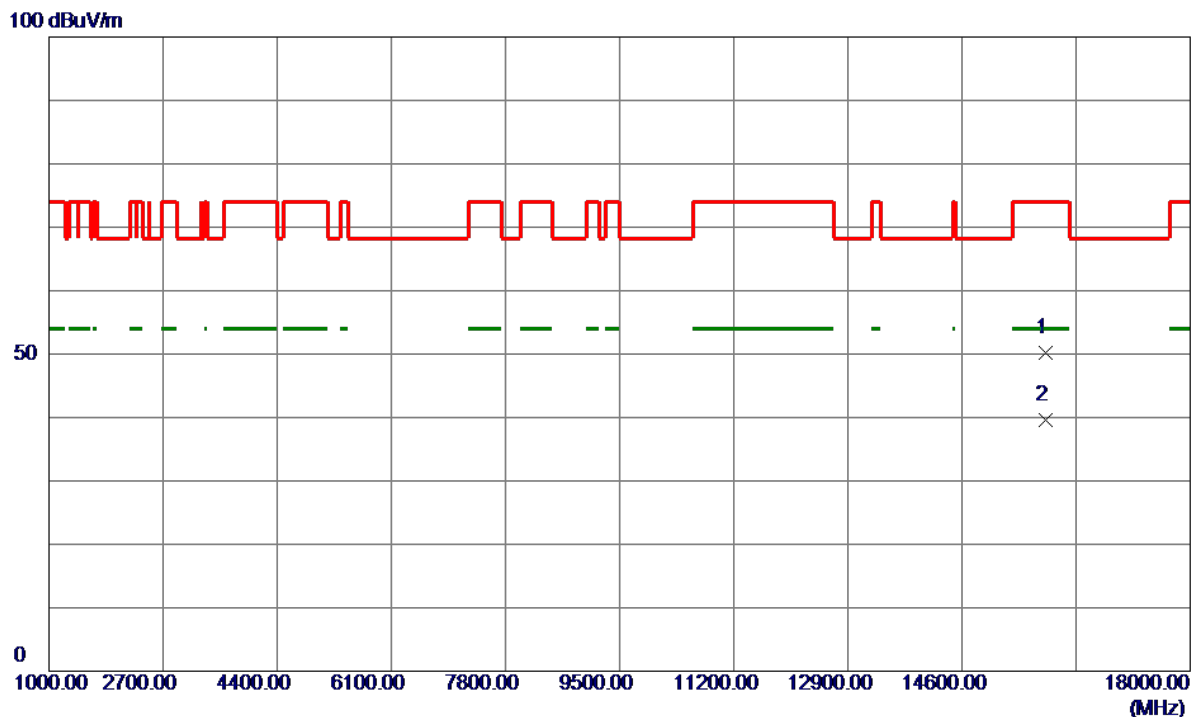


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15844.9000	37.32	12.88	50.20	74.00	-23.80	Peak	
2 *	15846.3000	26.78	12.88	39.66	54.00	-14.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT40) Mode 5270 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

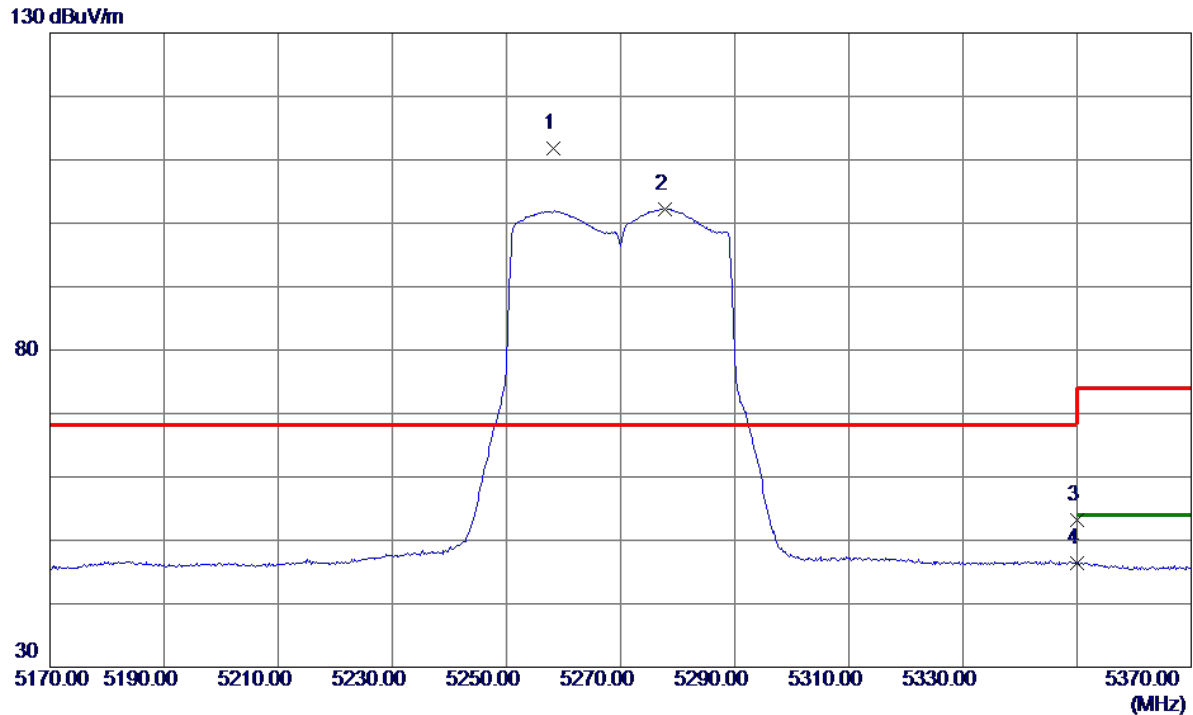


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5258.2000	97.03	14.76	111.79	68.20	43.59	Peak	No Limit
2	5277.8000	87.40	14.82	102.22	999.00	-896.78	AVG	No Limit
3	5350.0000	38.20	15.02	53.22	74.00	-20.78	Peak	
4	5350.0000	31.34	15.02	46.36	54.00	-7.64	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

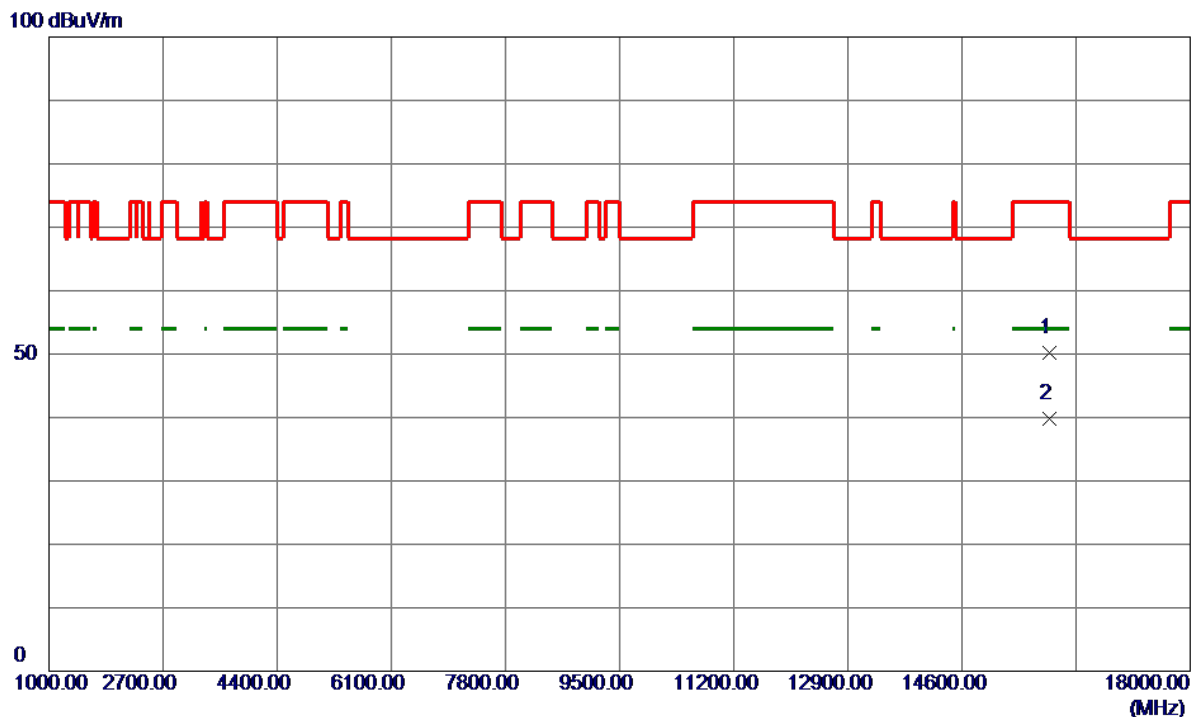


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15896.6000	37.20	12.92	50.12	74.00	-23.88	Peak	
2 *	15906.7000	26.85	12.93	39.78	54.00	-14.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT40) Mode 5310 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

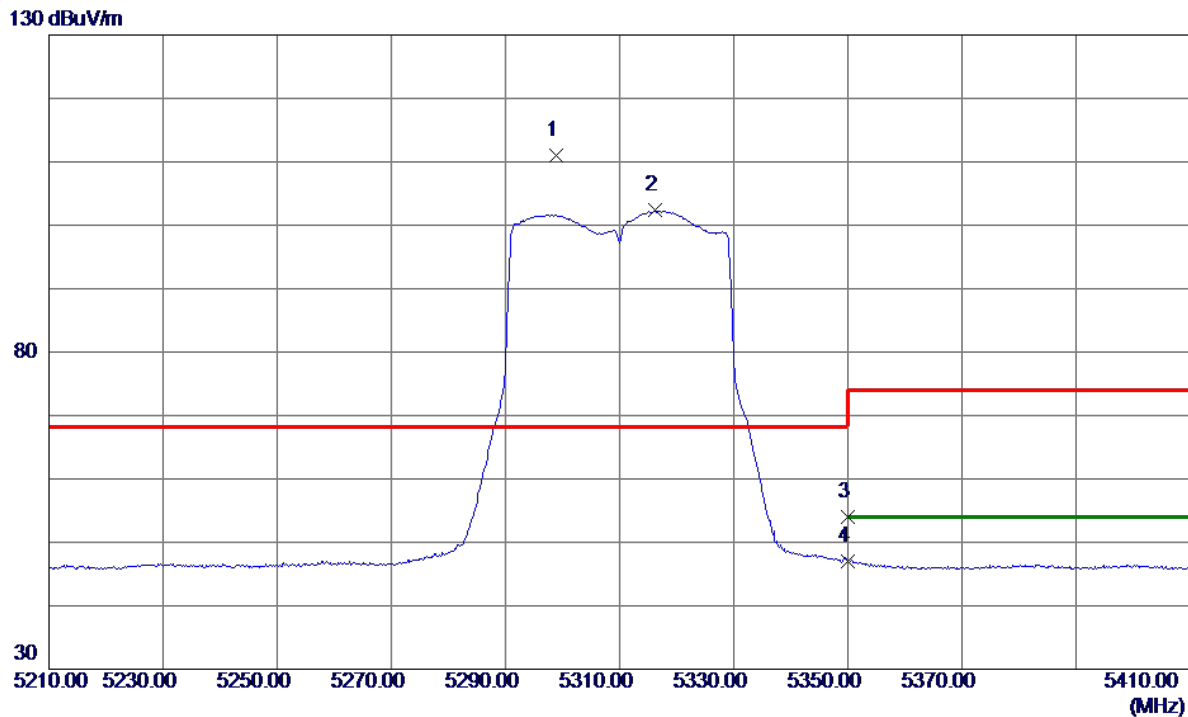


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5298.8000	96.17	14.88	111.05	68.20	42.85	Peak	No Limit
2	5316.2000	87.39	14.93	102.32	999.00	-896.68	AVG	No Limit
3	5350.0000	39.04	15.02	54.06	74.00	-19.94	Peak	
4	5350.0000	32.05	15.02	47.07	54.00	-6.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

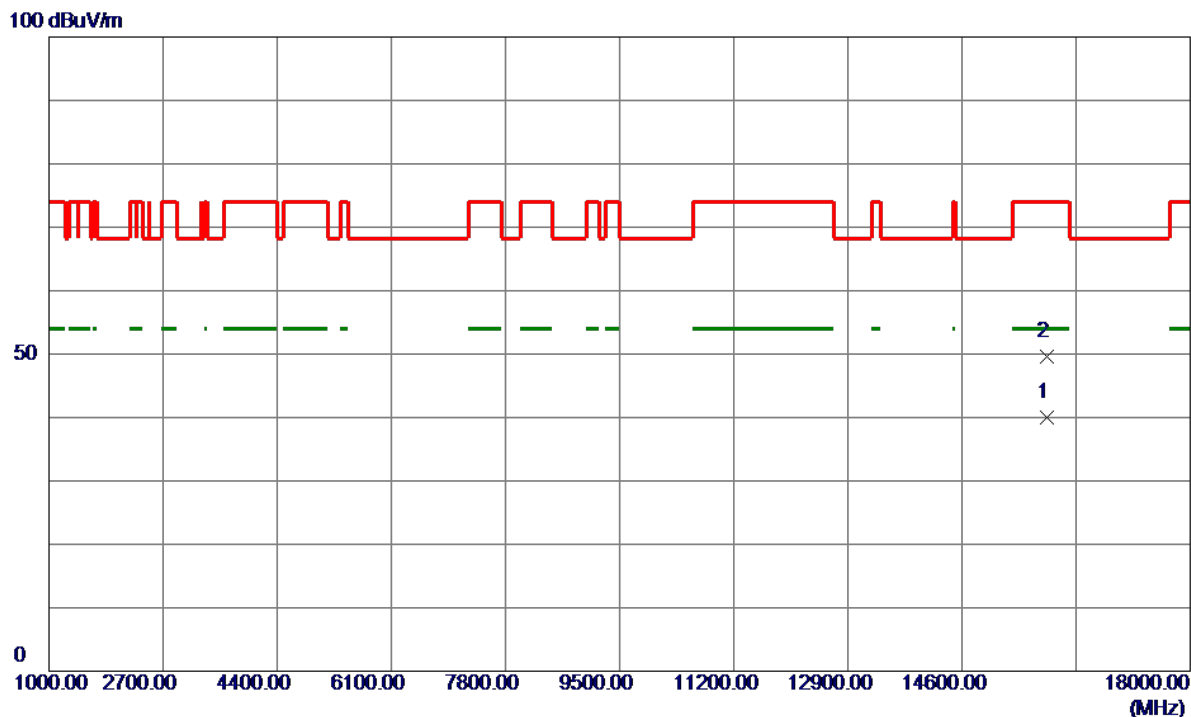


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15864.3000	27.05	12.89	39.94	54.00	-14.06	AVG	
2	15870.6000	36.61	12.90	49.51	74.00	-24.49	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT80) Mode 5290 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

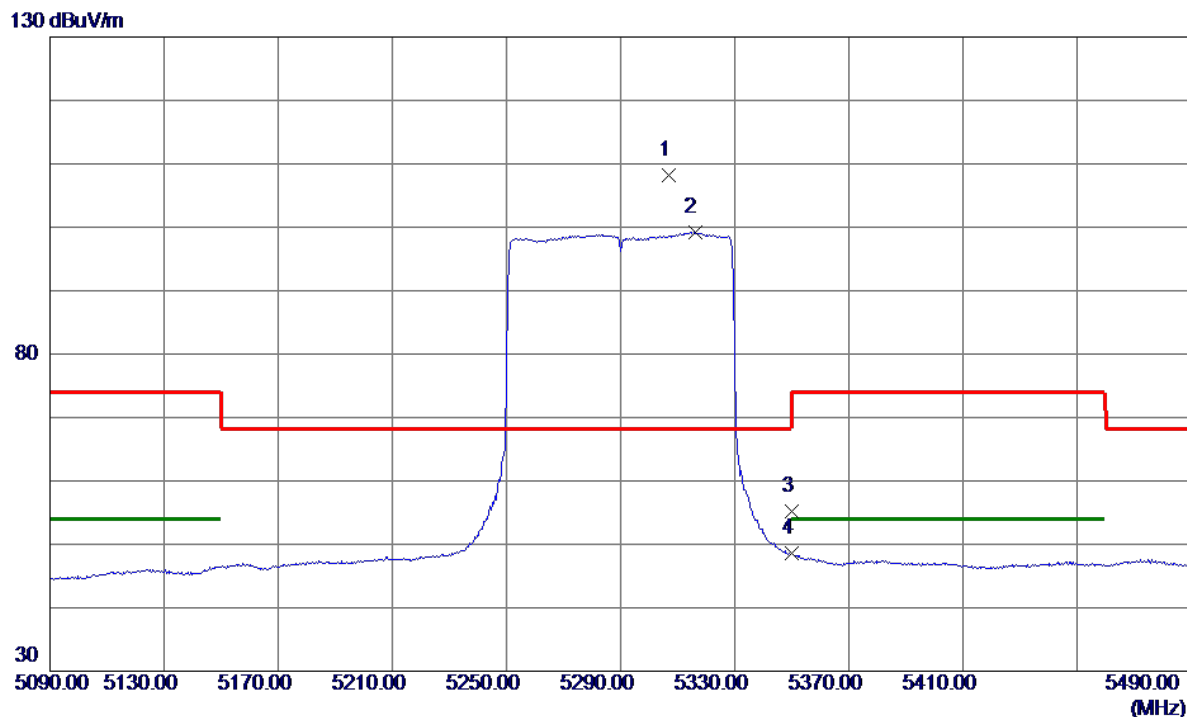


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5306.8000	93.30	14.90	108.20	68.20	40.00	Peak	No Limit
2	5316.0000	84.34	14.93	99.27	999.00	-899.73	AVG	No Limit
3	5350.0000	40.15	15.02	55.17	74.00	-18.83	Peak	
4	5350.0000	33.58	15.02	48.60	54.00	-5.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode 5250 MHz	Polarization	Vertical
-----------	--	--------------	----------

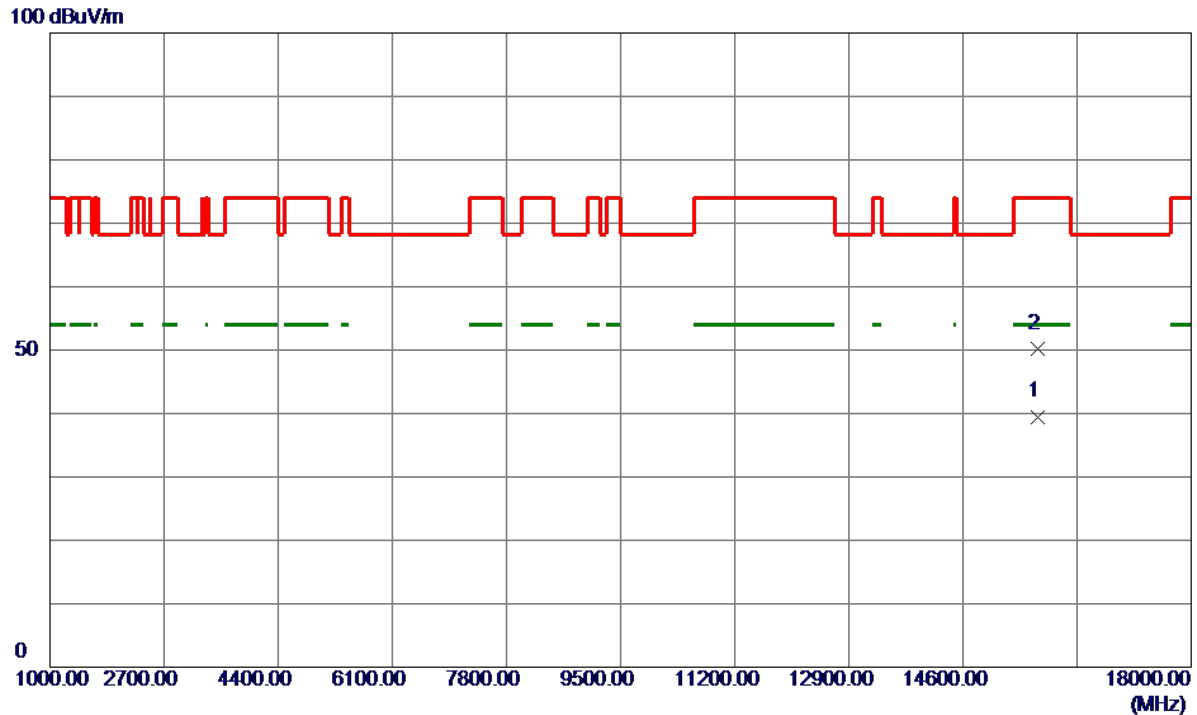

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15716.6000	26.72	12.78	39.50	54.00	-14.50	AVG	
2	15719.5000	37.38	12.78	50.16	74.00	-23.84	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode 5250 MHz	Polarization	Horizontal
-----------	--	--------------	------------

130 dBuV/m

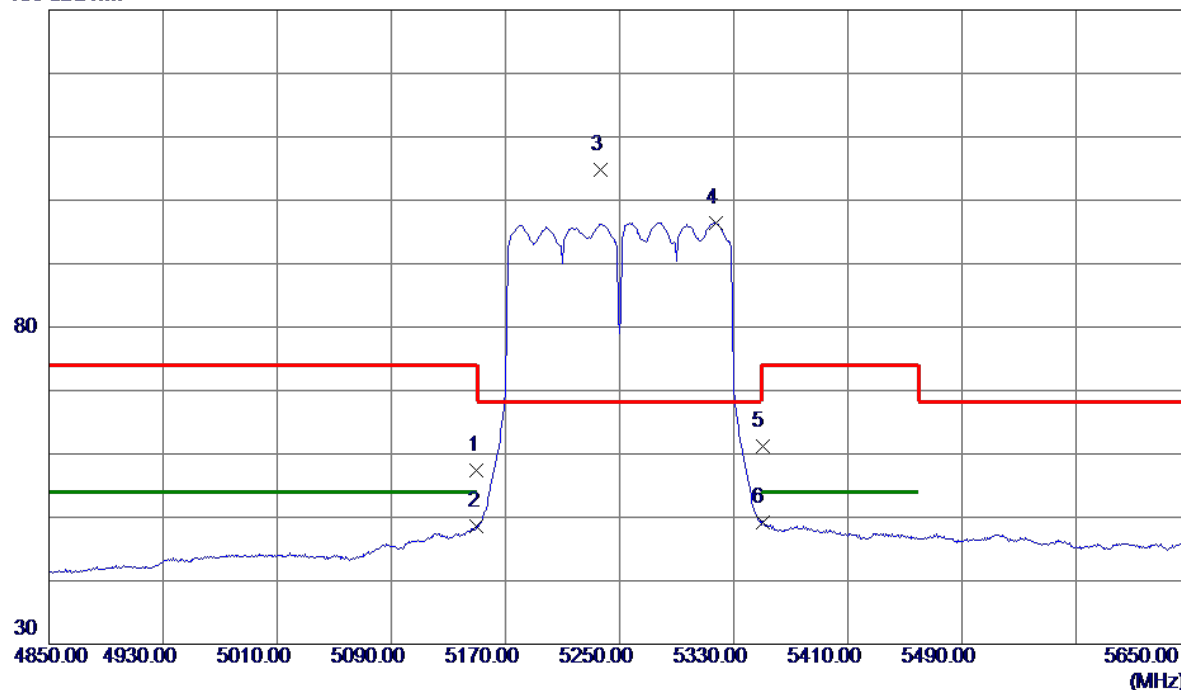


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	42.90	14.45	57.35	74.00	-16.65	Peak	
2	5150.0000	34.12	14.45	48.57	54.00	-5.43	AVG	
3 *	5236.4000	90.02	14.70	104.72	68.20	36.52	Peak	No Limit
4	5317.2000	81.54	14.93	96.47	999.00	-902.53	AVG	No Limit
5	5350.0000	46.09	15.02	61.11	74.00	-12.89	Peak	
6	5350.0000	34.09	15.02	49.11	54.00	-4.89	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX BE(EHT160) Mode 5250 MHz	Polarization	Vertical
-----------	--	--------------	----------

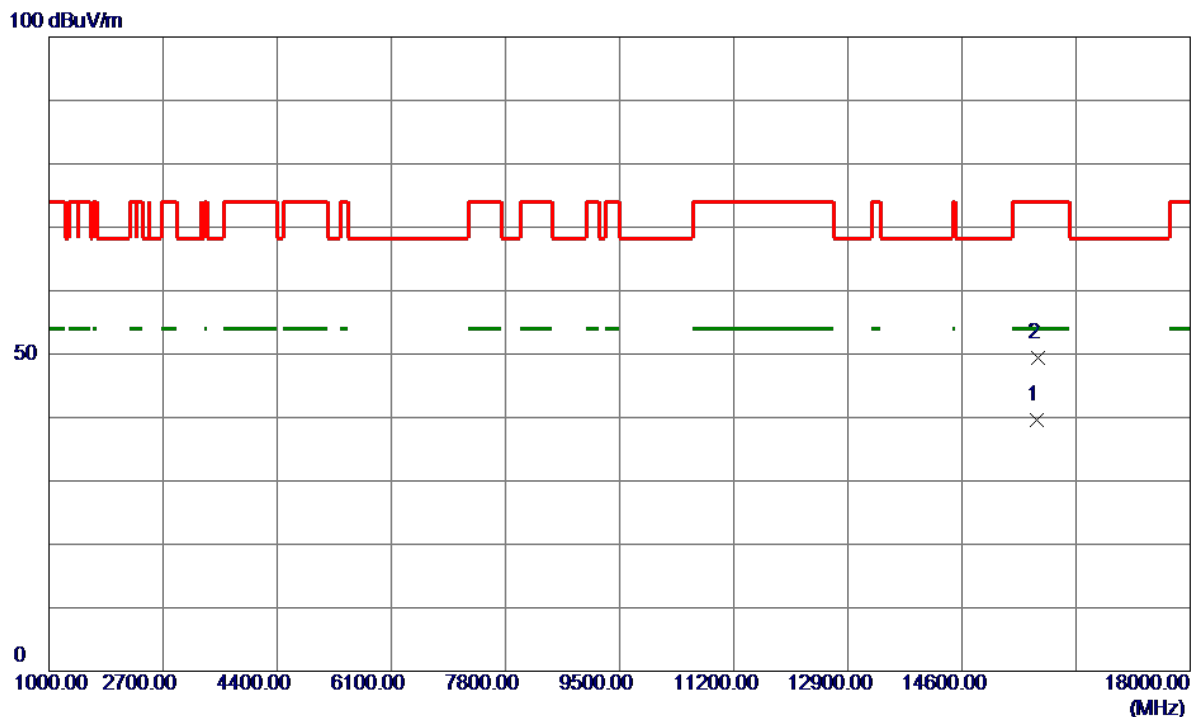


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15709.7000	26.84	12.77	39.61	54.00	-14.39	AVG	
2	15728.5000	36.70	12.79	49.49	74.00	-24.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX BE(EHT160) Mode 5250 MHz	Polarization	Horizontal
-----------	--	--------------	------------

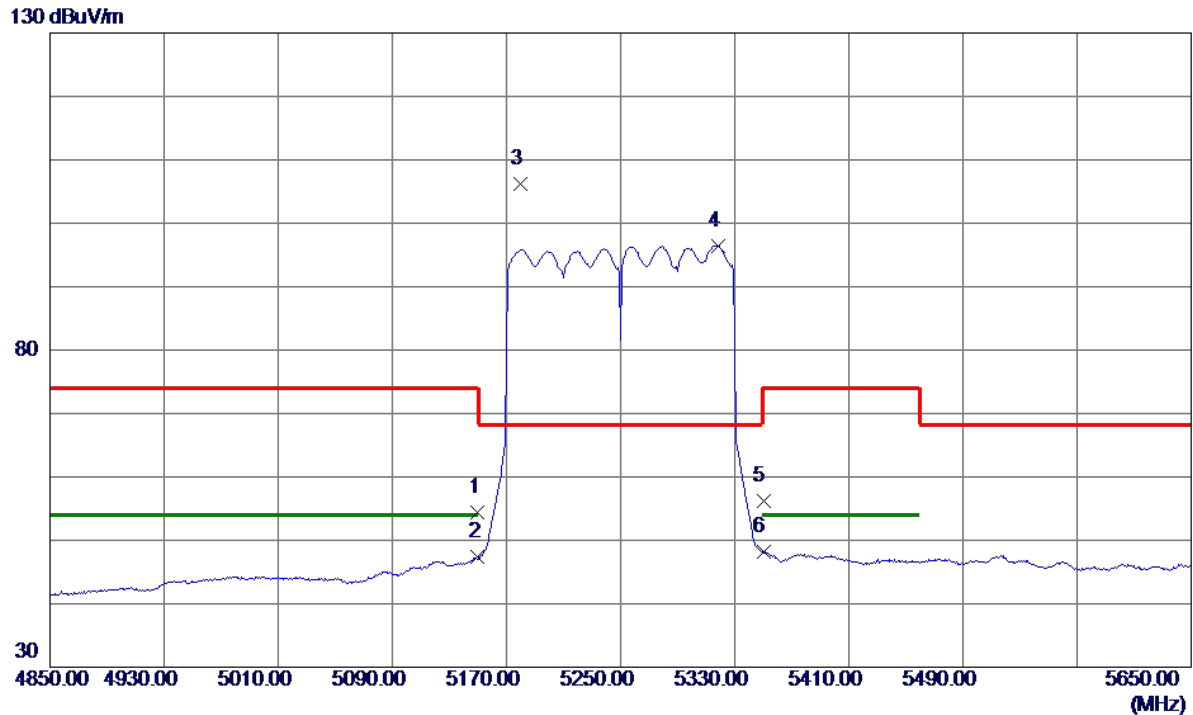

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	40.01	14.45	54.46	74.00	-19.54	Peak	
2	5150.0000	32.86	14.45	47.31	54.00	-6.69	AVG	
3 *	5179.6000	91.67	14.54	106.21	68.20	38.01	Peak	No Limit
4	5318.8000	81.55	14.93	96.48	999.00	-902.52	AVG	No Limit
5	5350.0000	41.11	15.02	56.13	74.00	-17.87	Peak	
6	5350.0000	33.11	15.02	48.13	54.00	-5.87	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.