


Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

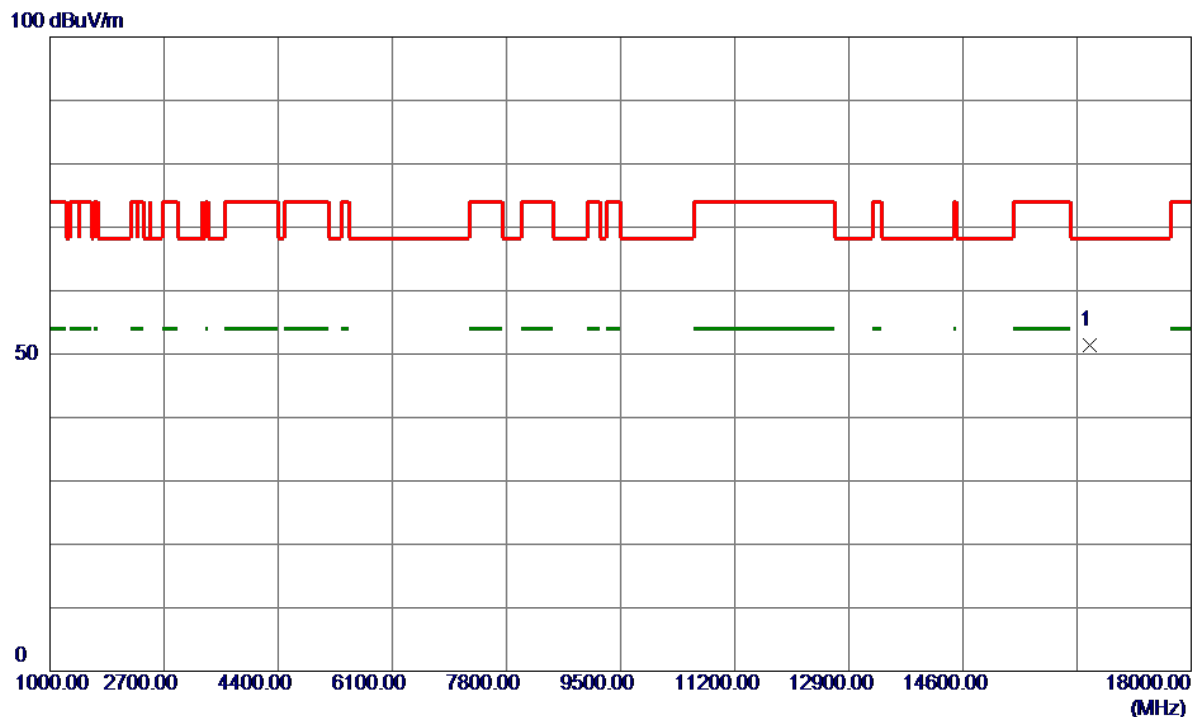


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16483.0000	37.33	13.99	51.32	68.20	-16.88	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

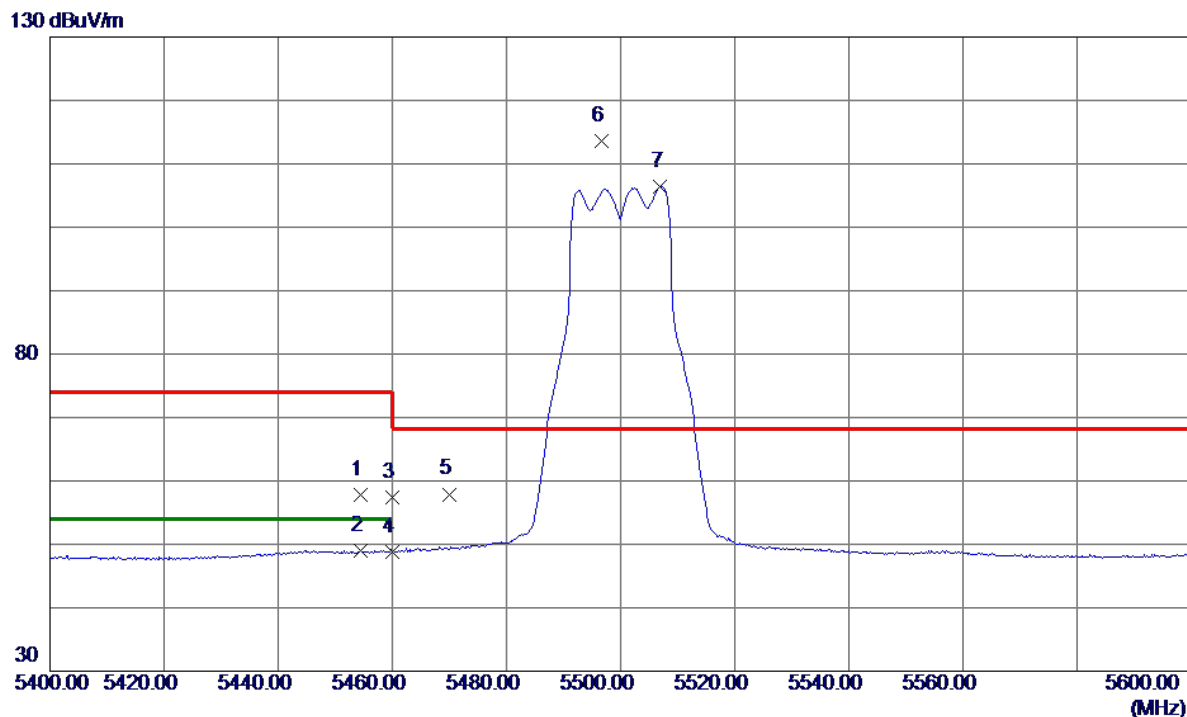


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5454.4000	42.48	15.32	57.80	74.00	-16.20	Peak	
2	5454.4000	33.70	15.32	49.02	54.00	-4.98	AVG	
3	5460.0000	42.11	15.34	57.45	74.00	-16.55	Peak	
4	5460.0000	33.54	15.34	48.88	54.00	-5.12	AVG	
5	5470.0000	42.53	15.37	57.90	68.20	-10.30	Peak	
6 *	5496.6000	98.16	15.45	113.61	68.20	45.41	Peak	No Limit
7	5507.0000	90.99	15.48	106.47	999.00	-892.53	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

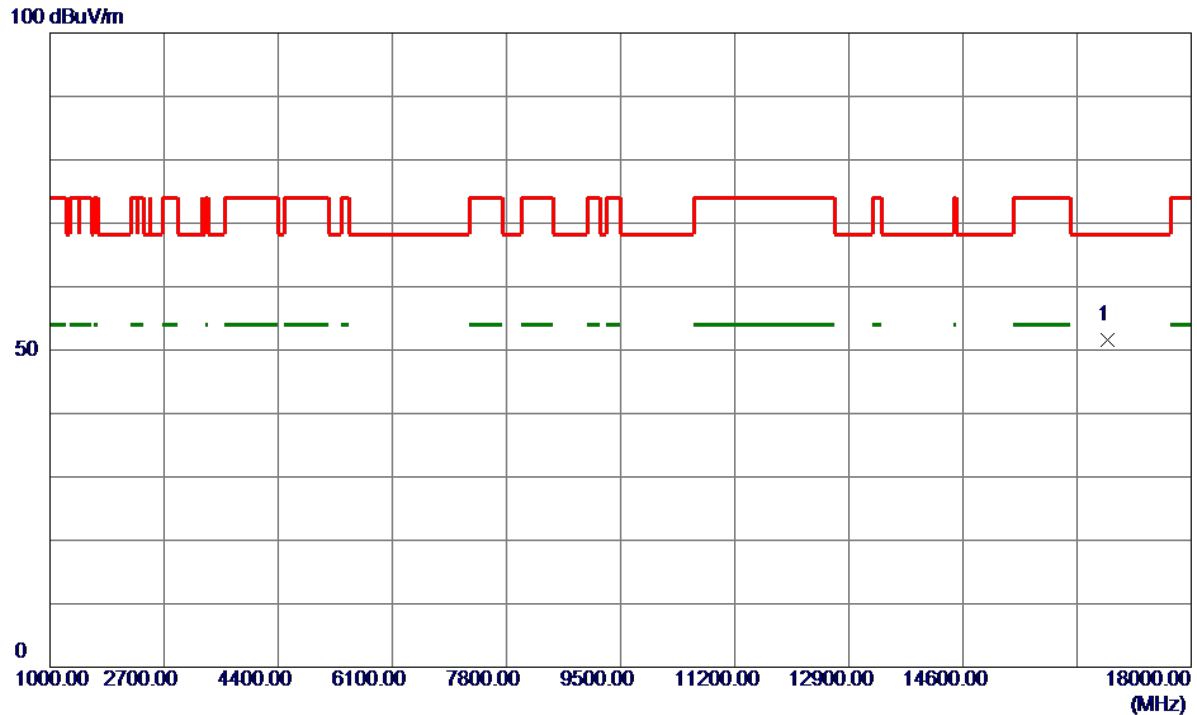


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16745.9500	37.21	14.34	51.55	68.20	-16.65	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

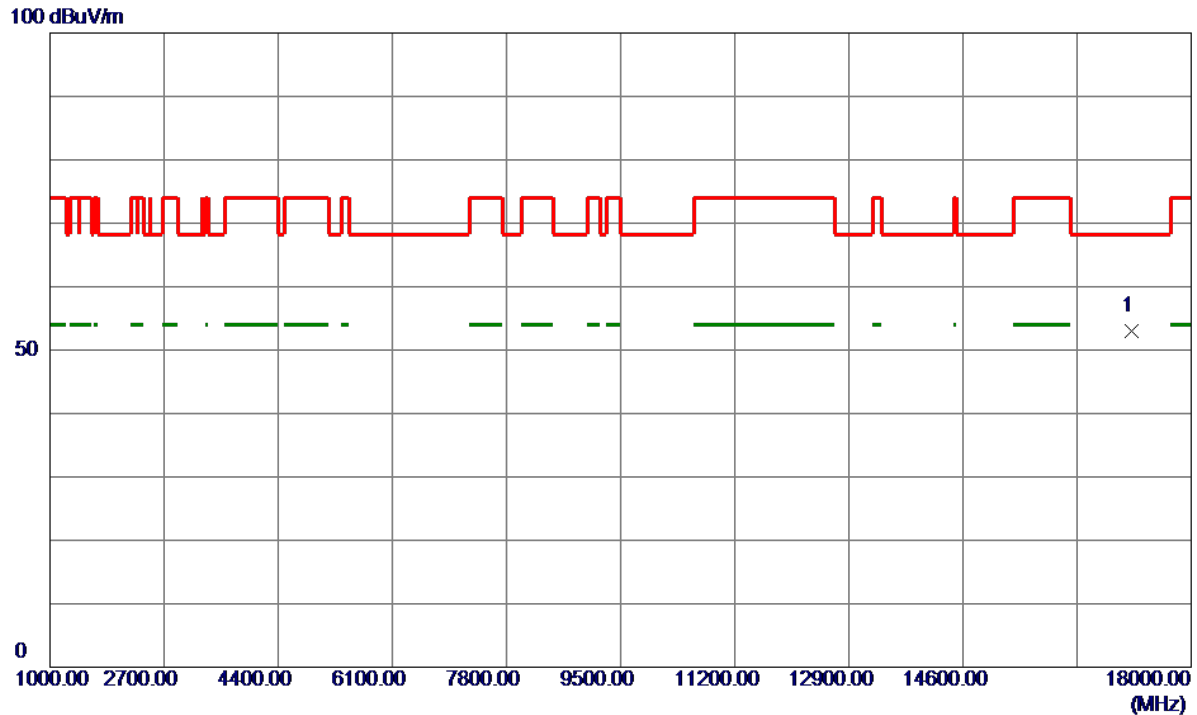


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17120.5000	38.10	14.88	52.98	68.20	-15.22	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

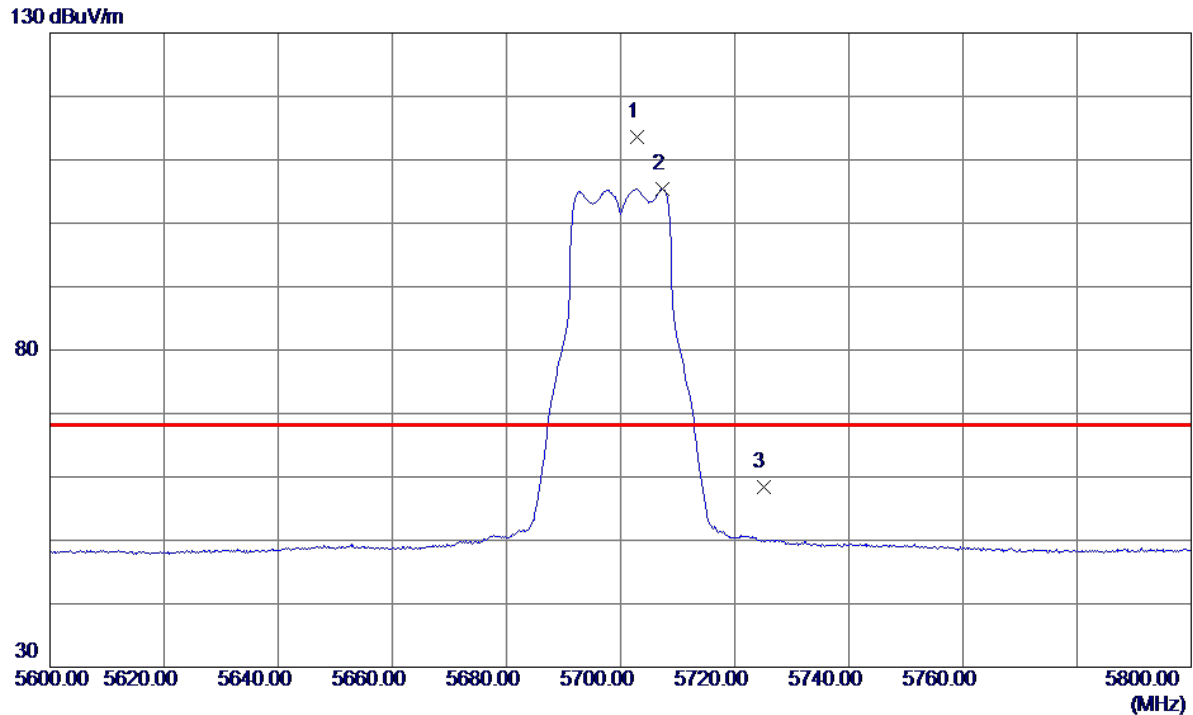


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5702.8000	97.39	16.15	113.54	68.20	45.34	Peak	No Limit
2	5707.4000	89.28	16.16	105.44	999.00	-893.56	AVG	No Limit
3	5725.0000	42.09	16.22	58.31	68.20	-9.89	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

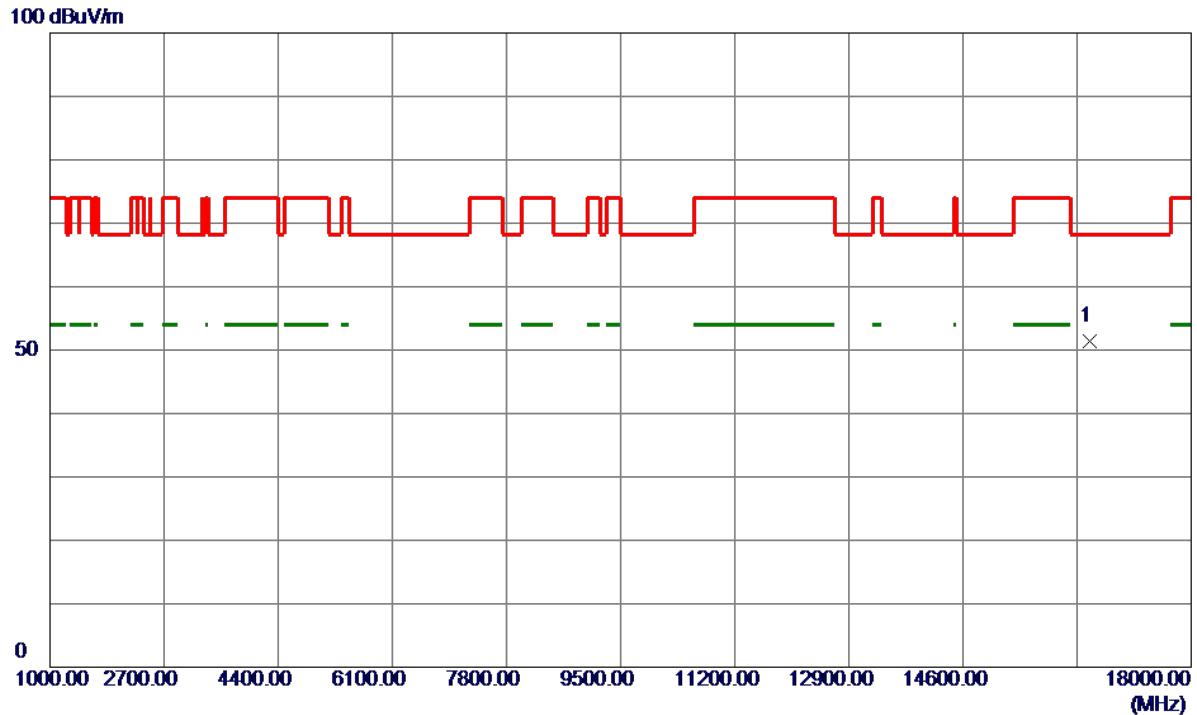


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16487.0500	37.35	14.00	51.35	68.20	-16.85	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

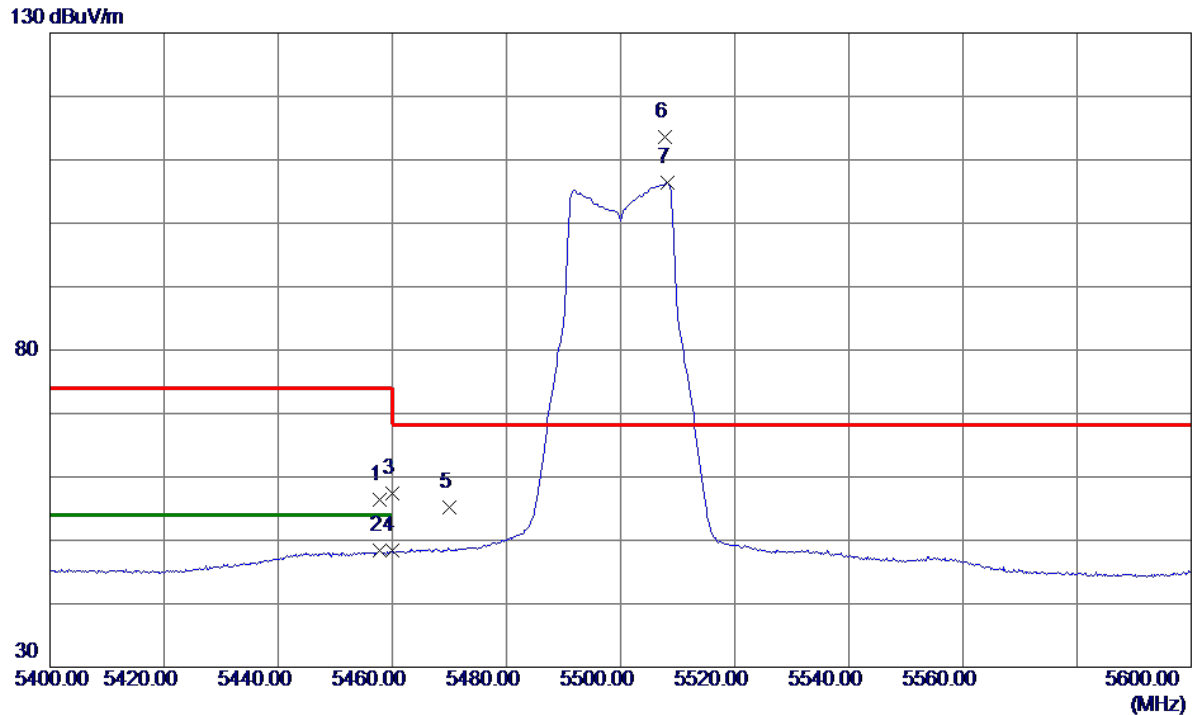


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5457.8000	41.15	15.33	56.48	74.00	-17.52	Peak	
2	5457.8000	33.03	15.33	48.36	54.00	-5.64	AVG	
3	5460.0000	42.06	15.34	57.40	74.00	-16.60	Peak	
4	5460.0000	32.99	15.34	48.33	54.00	-5.67	AVG	
5	5470.0000	39.84	15.37	55.21	68.20	-12.99	Peak	
6 *	5507.8000	98.07	15.48	113.55	68.20	45.35	Peak	No Limit
7	5508.2000	90.93	15.48	106.41	999.00	-892.59	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

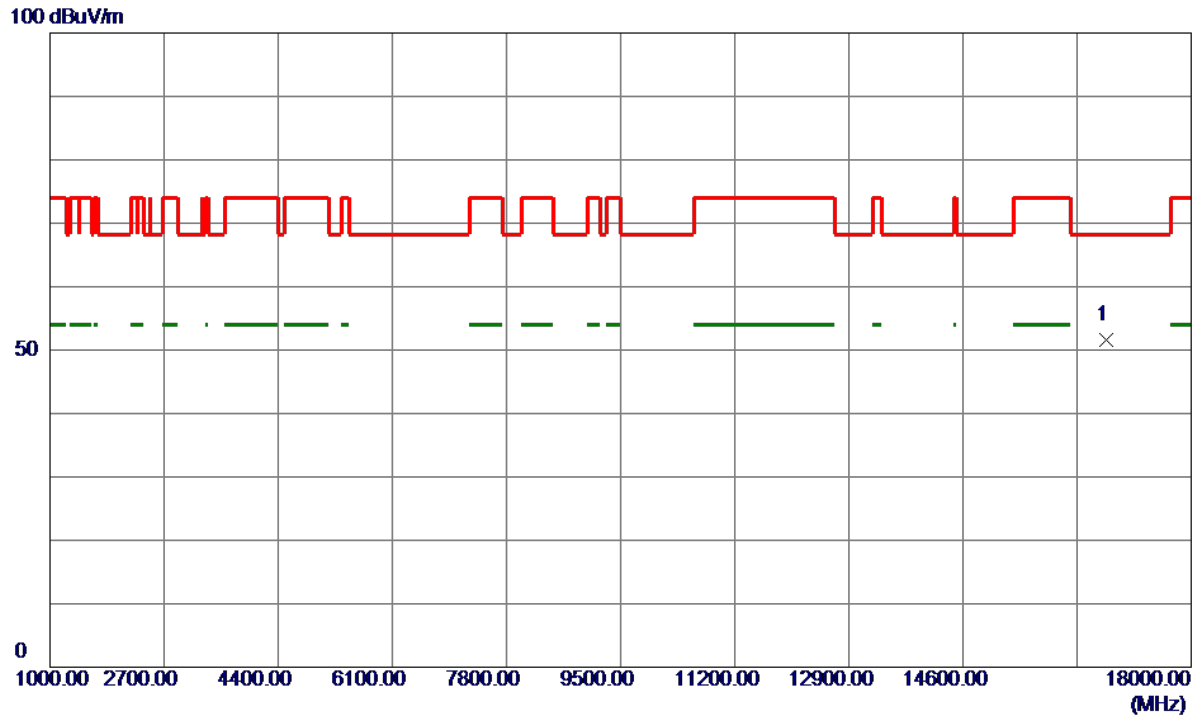


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16726.2500	37.30	14.31	51.61	68.20	-16.59	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

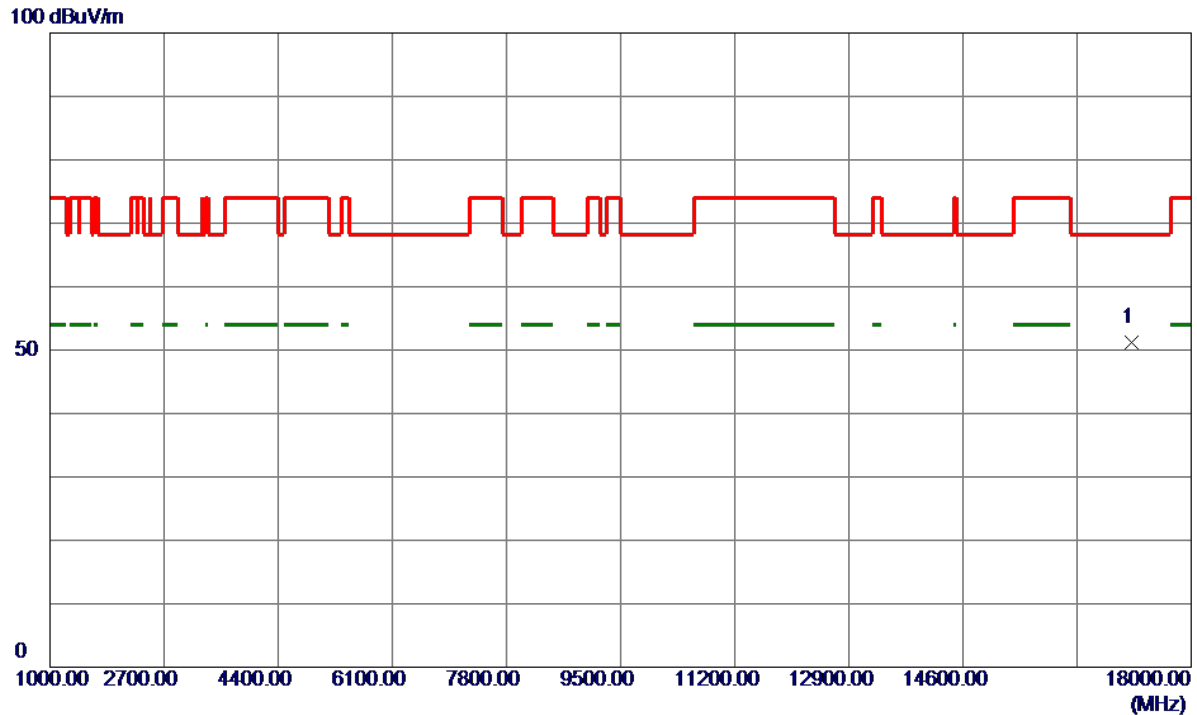


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17106.4500	36.39	14.85	51.24	68.20	-16.96	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

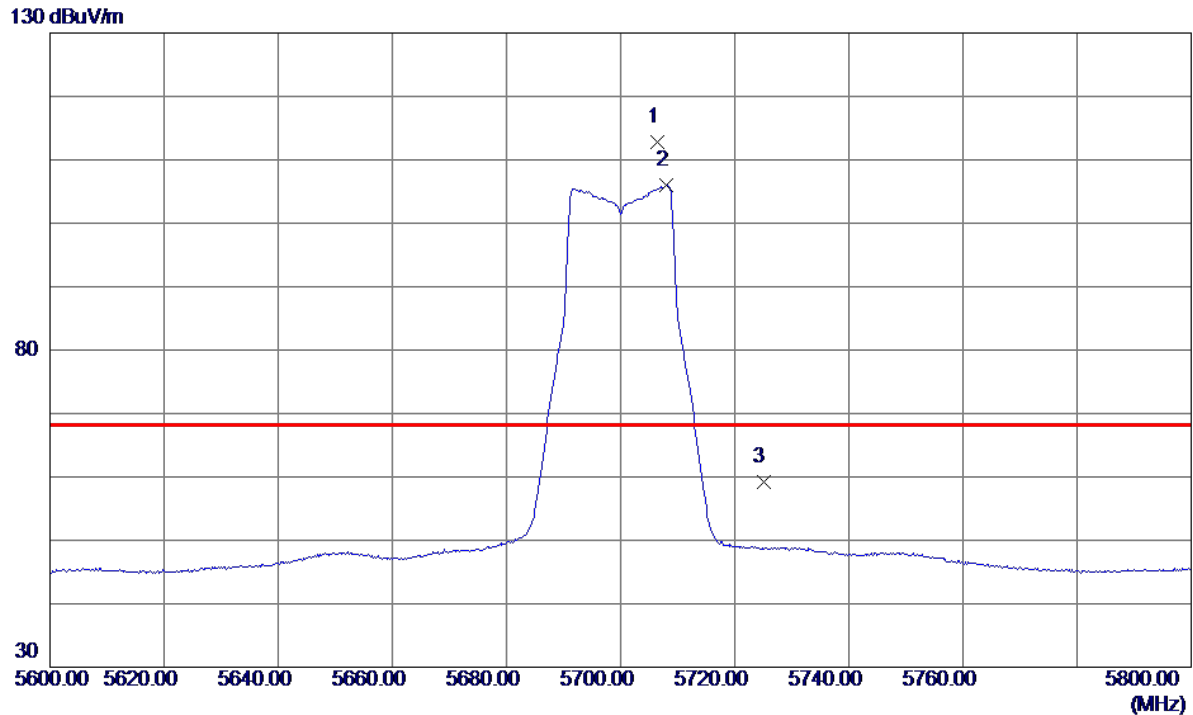


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5706.4000	96.73	16.16	112.89	68.20	44.69	Peak	No Limit
2	5708.0000	89.90	16.16	106.06	999.00	-892.94	AVG	No Limit
3	5725.0000	42.90	16.22	59.12	68.20	-9.08	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

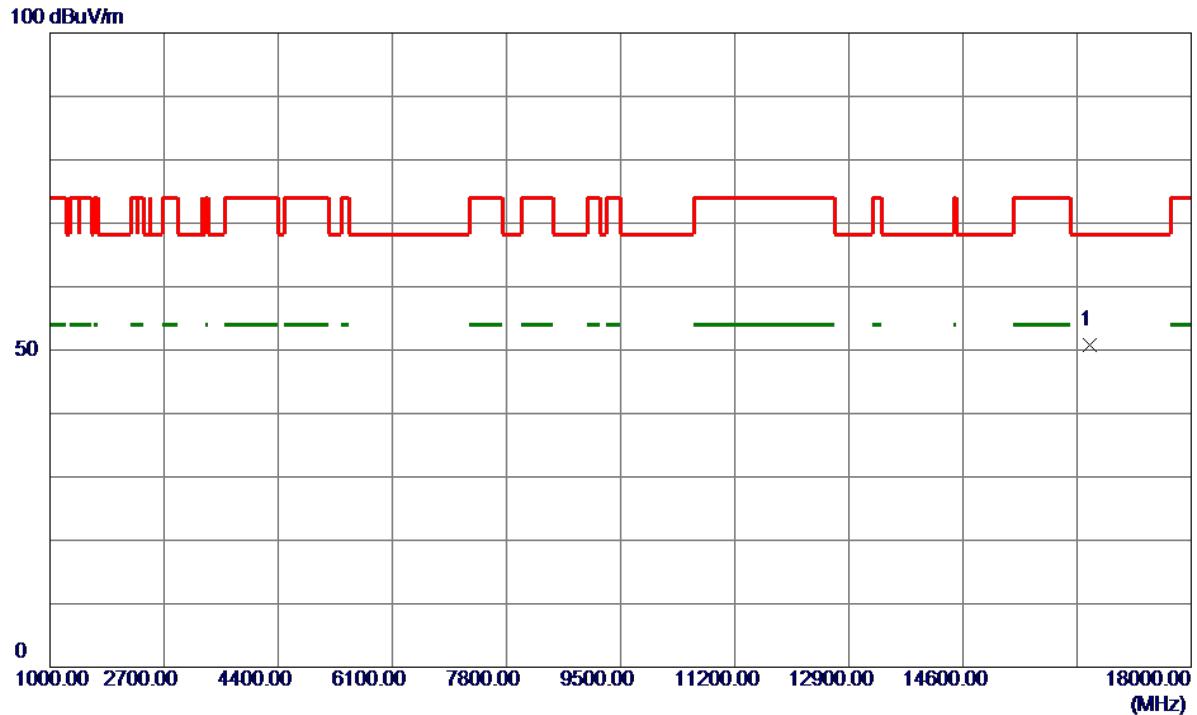


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16485.3000	36.80	13.99	50.79	68.20	-17.41	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

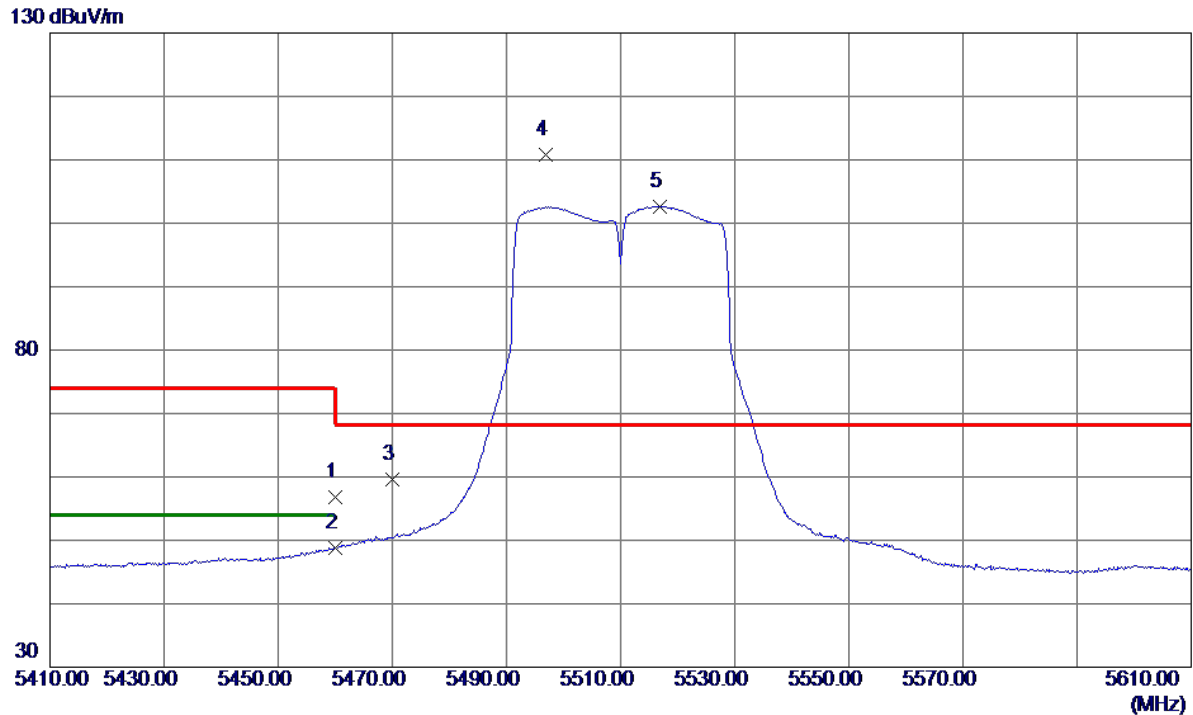


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	41.45	15.34	56.79	74.00	-17.21	Peak	
2	5460.0000	33.38	15.34	48.72	54.00	-5.28	AVG	
3	5470.0000	44.27	15.37	59.64	68.20	-8.56	Peak	
4 *	5496.8000	95.31	15.45	110.76	68.20	42.56	Peak	No Limit
5	5516.8000	87.13	15.51	102.64	999.00	-896.36	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

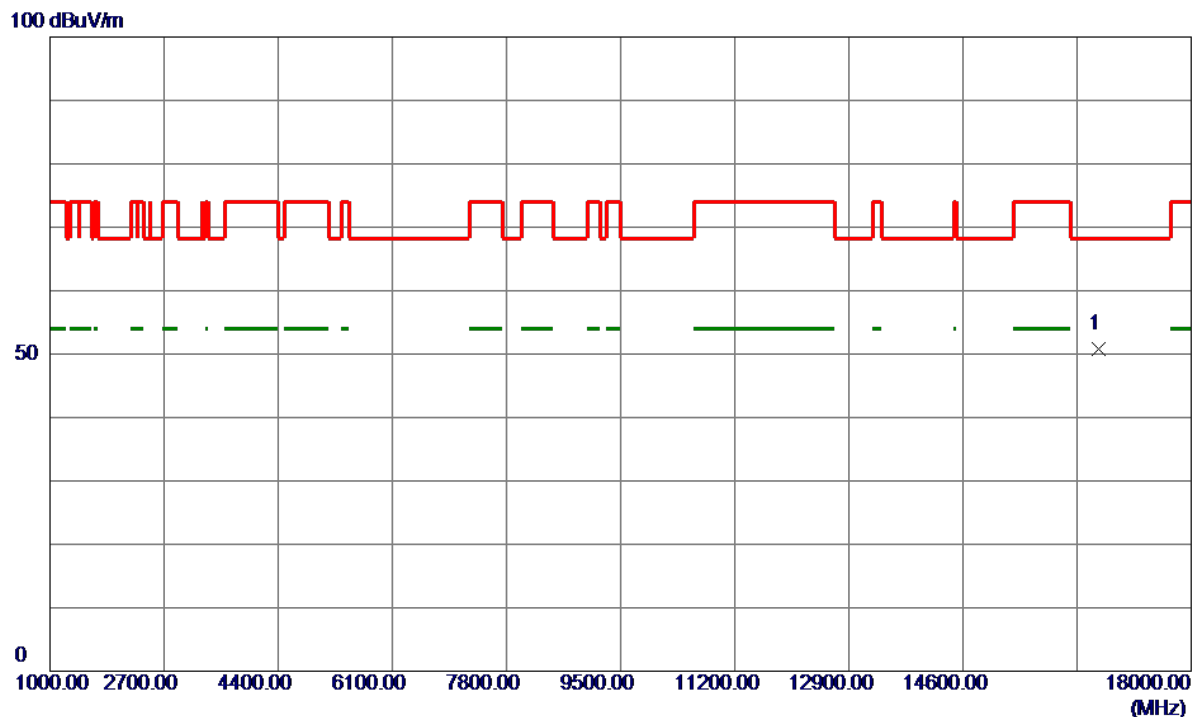


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16616.3000	36.59	14.17	50.76	68.20	-17.44	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

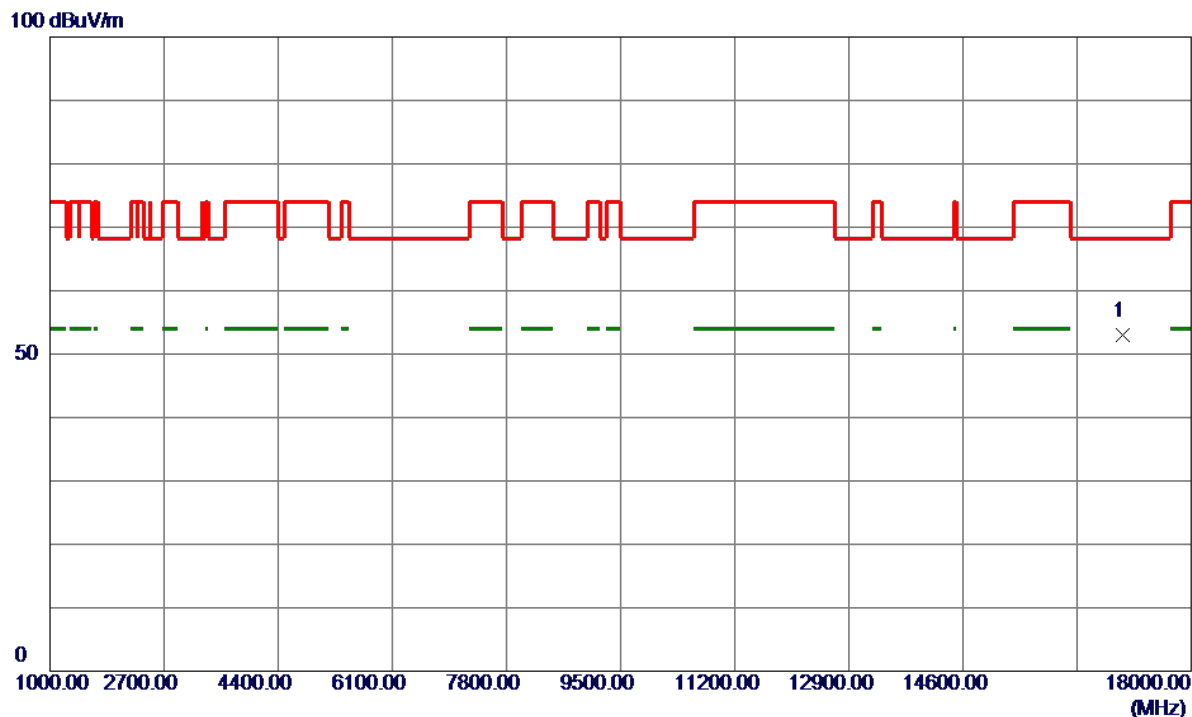


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16983.4000	38.26	14.64	52.90	68.20	-15.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

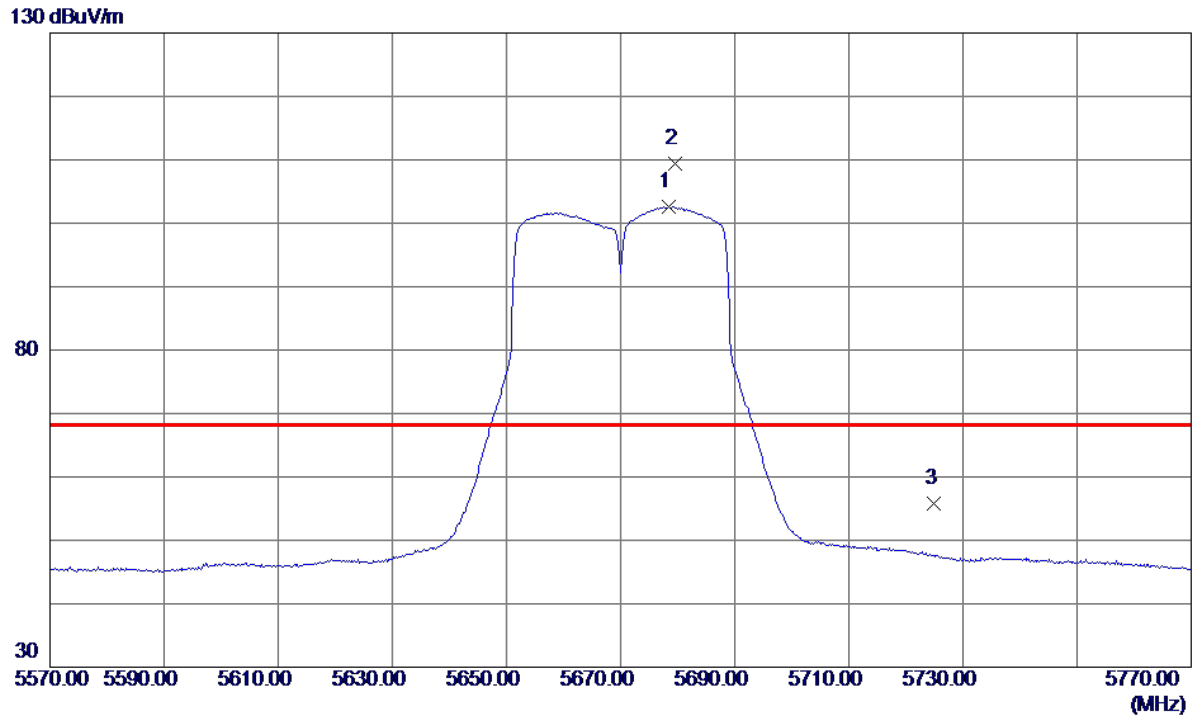


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5678.4000	86.50	16.06	102.56	999.00	-896.44	AVG	No Limit
2 *	5679.6000	93.32	16.07	109.39	68.20	41.19	Peak	No Limit
3	5725.0000	39.55	16.22	55.77	68.20	-12.43	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

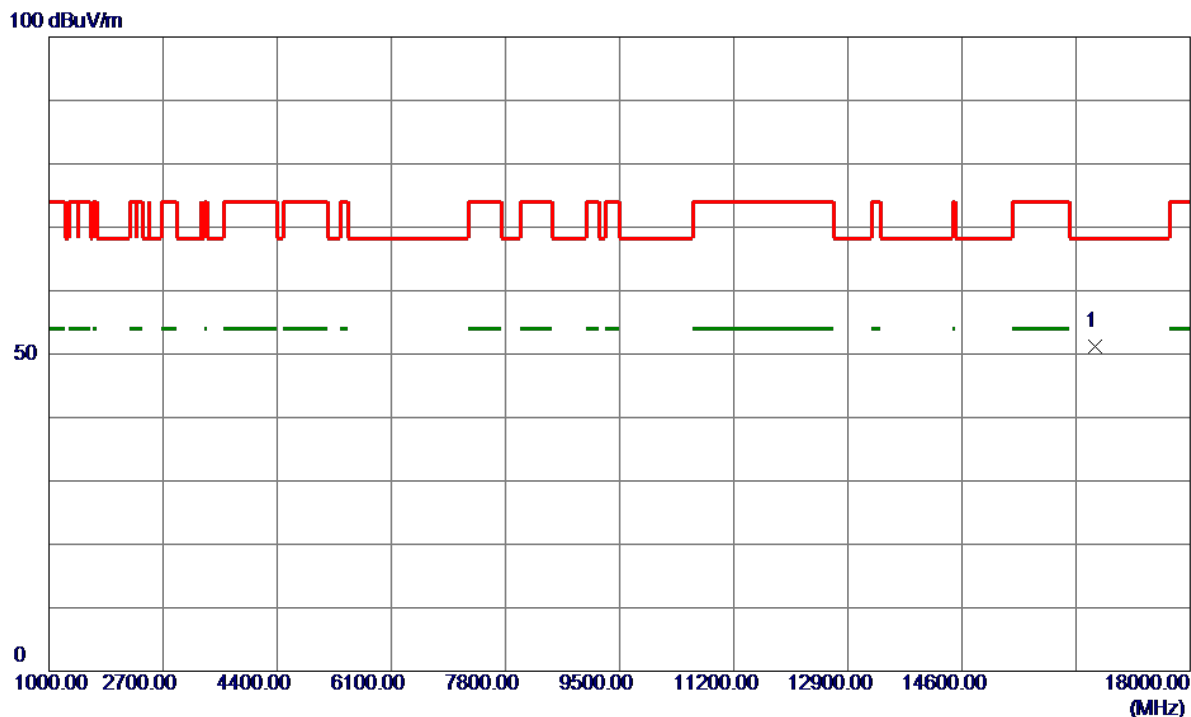


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16582.1000	37.13	14.13	51.26	68.20	-16.94	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

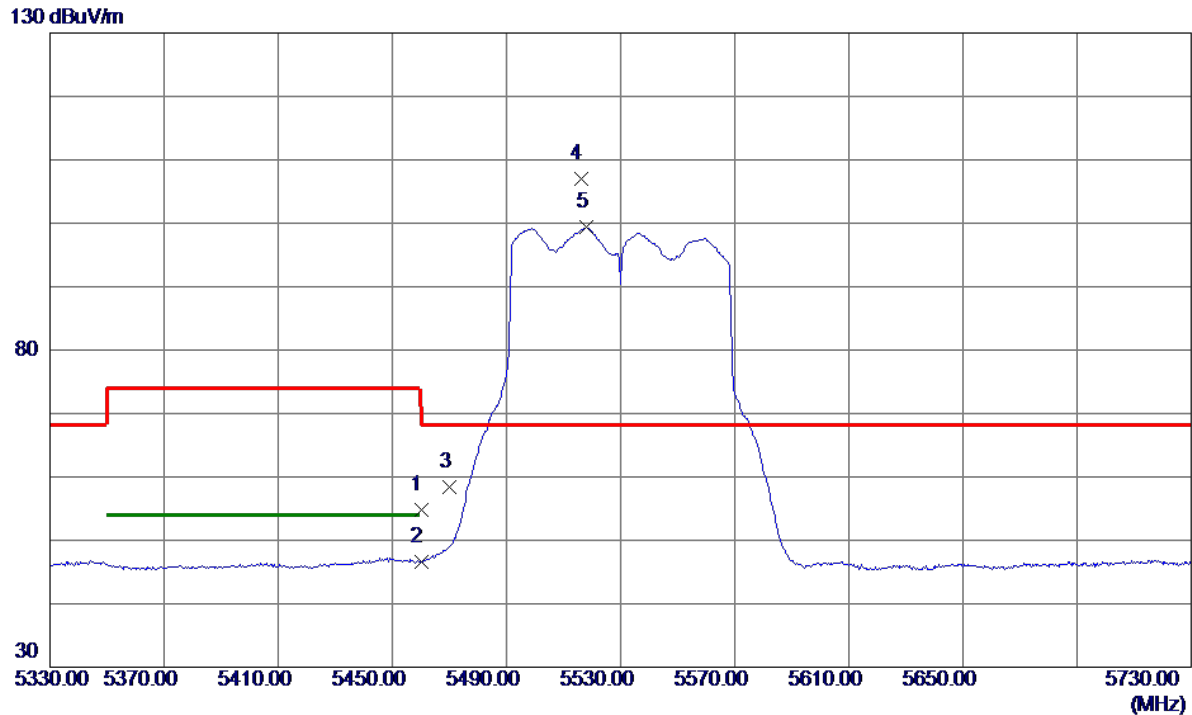


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	39.43	15.34	54.77	74.00	-19.23	Peak	
2	5460.0000	31.28	15.34	46.62	54.00	-7.38	AVG	
3	5470.0000	42.99	15.37	58.36	68.20	-9.84	Peak	
4 *	5516.0000	91.43	15.51	106.94	68.20	38.74	Peak	No Limit
5	5518.0000	83.81	15.52	99.33	999.00	-899.67	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

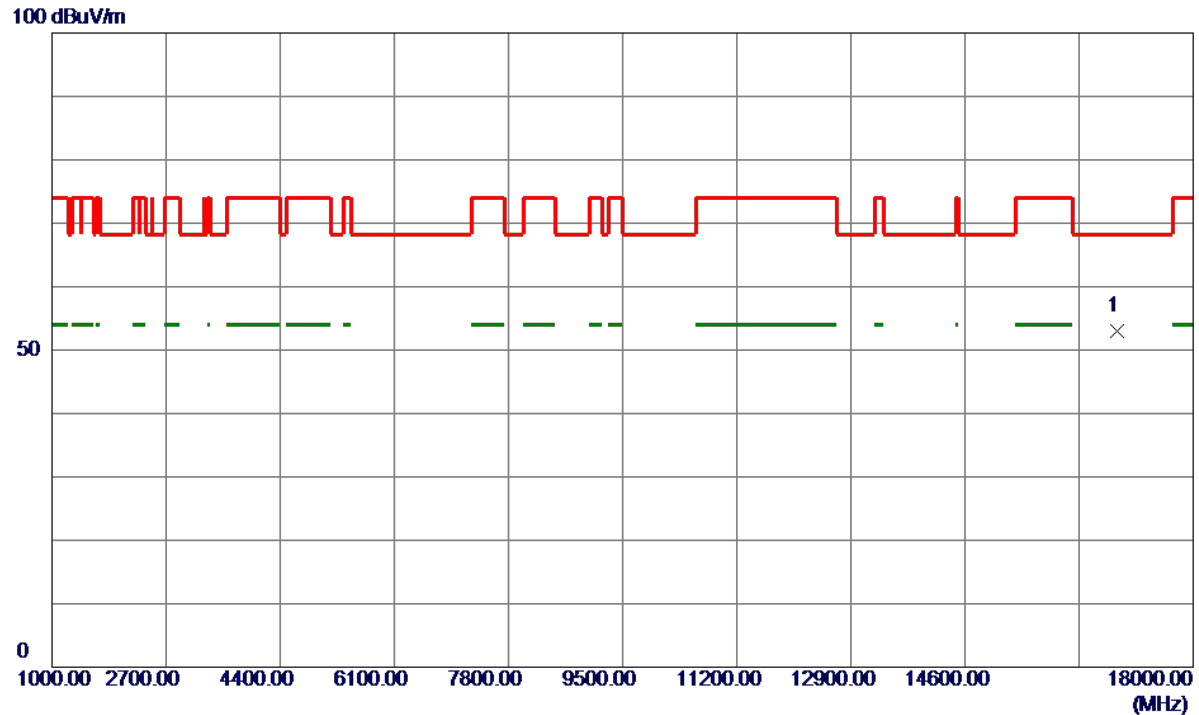


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16859.3000	38.44	14.48	52.92	68.20	-15.28	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

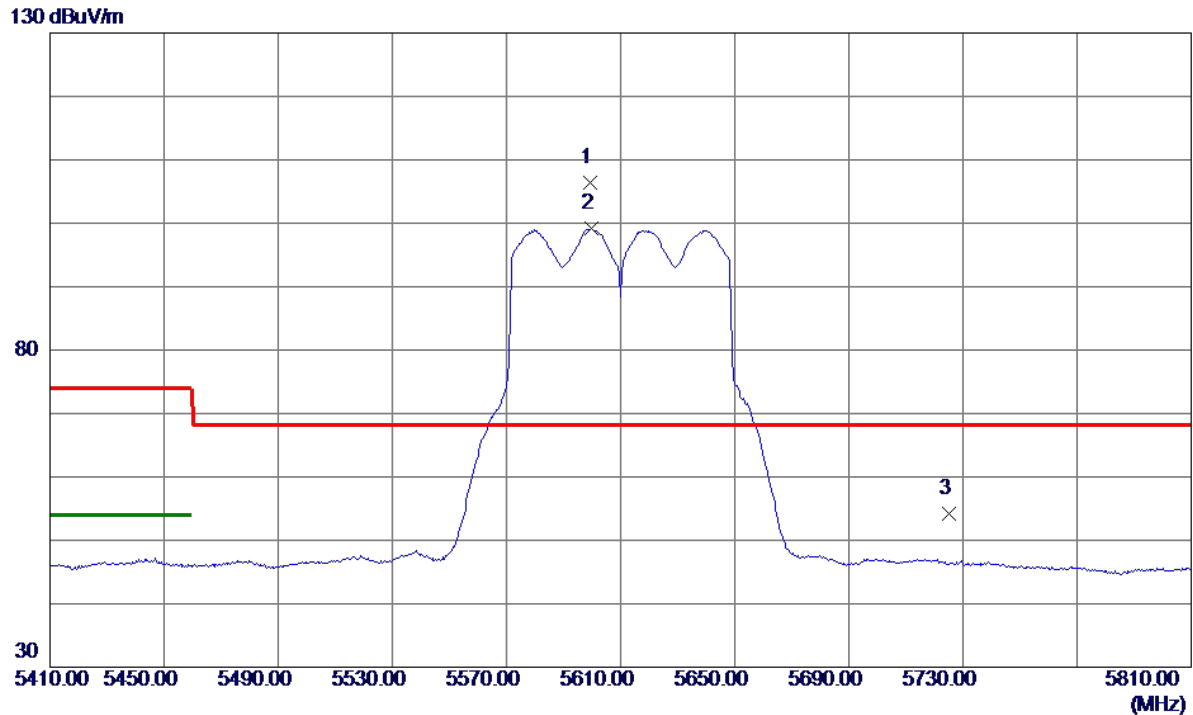


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5599.2000	90.63	15.79	106.42	68.20	38.22	Peak	No Limit
2	5599.6000	83.33	15.79	99.12	999.00	-899.88	AVG	No Limit
3	5725.0000	38.02	16.22	54.24	68.20	-13.96	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

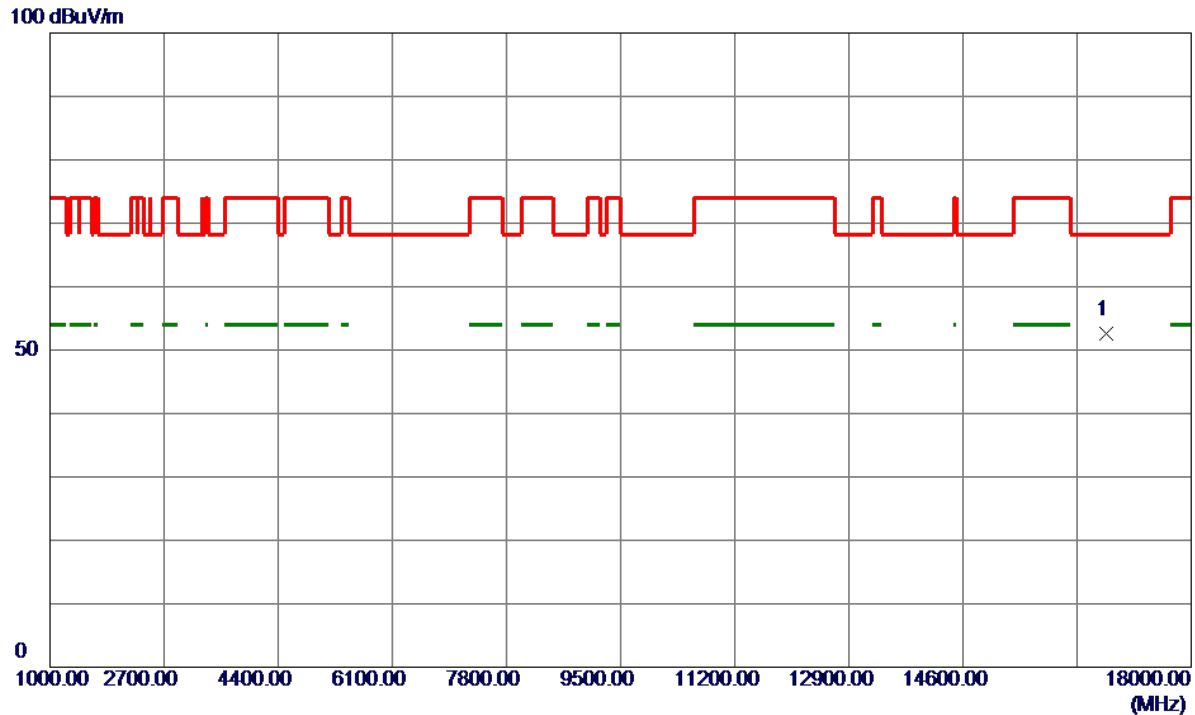


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16727.3000	38.19	14.31	52.50	68.20	-15.70	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT160) Mode 5570 MHz	Polarization	Horizontal
-----------	-------------------------------------	--------------	------------

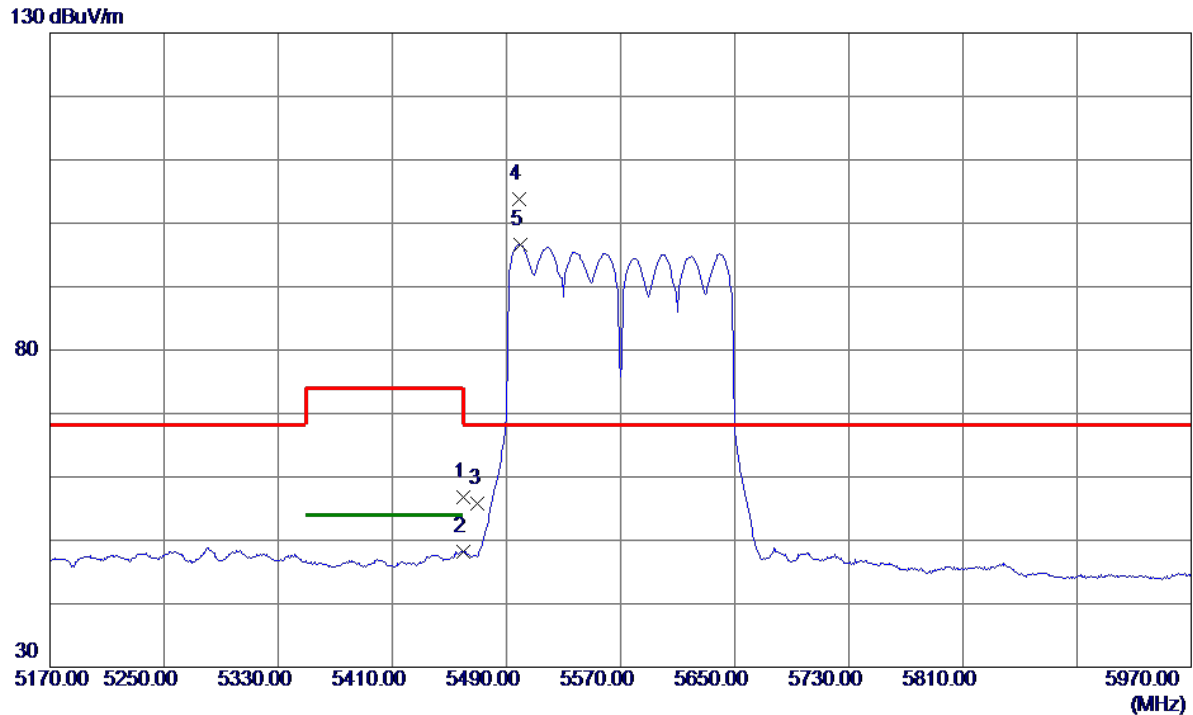


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	41.54	15.34	56.88	74.00	-17.12	Peak	
2	5460.0000	32.78	15.34	48.12	54.00	-5.88	AVG	
3	5470.0000	40.40	15.37	55.77	68.20	-12.43	Peak	
4 *	5498.8000	88.33	15.45	103.78	68.20	35.58	Peak	No Limit
5	5499.6000	81.14	15.45	96.59	999.00	-902.41	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

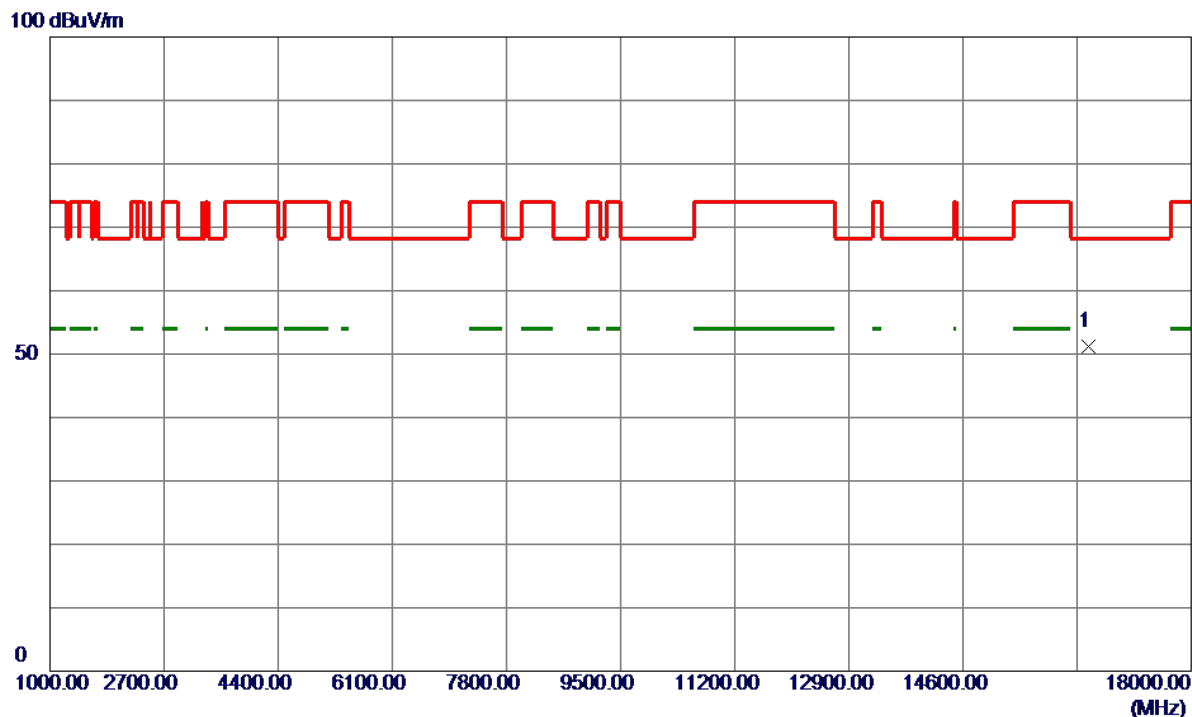


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16461.5000	37.26	13.95	51.21	68.20	-16.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5500 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

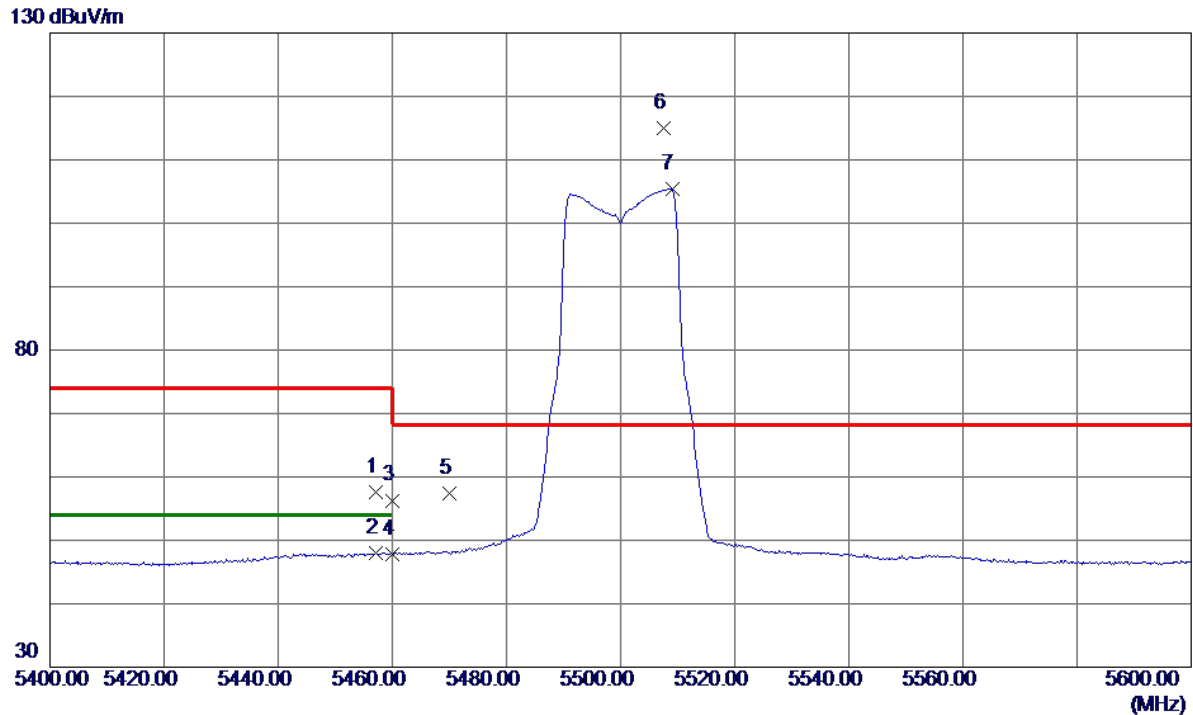


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5457.2000	42.22	15.33	57.55	74.00	-16.45	Peak	
2	5457.2000	32.67	15.33	48.00	54.00	-6.00	AVG	
3	5460.0000	40.96	15.34	56.30	74.00	-17.70	Peak	
4	5460.0000	32.49	15.34	47.83	54.00	-6.17	AVG	
5	5470.0000	41.96	15.37	57.33	68.20	-10.87	Peak	
6 *	5507.6000	99.52	15.48	115.00	68.20	46.80	Peak	No Limit
7	5509.0000	89.99	15.49	105.48	999.00	-893.52	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5580 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

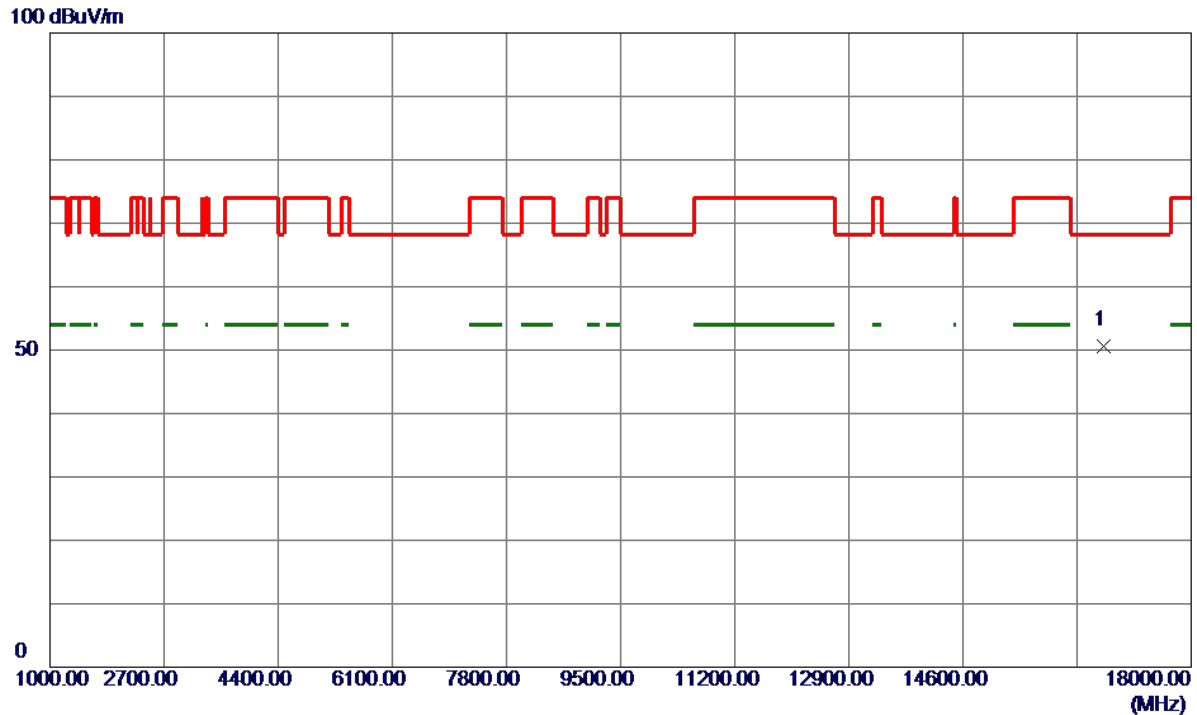


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16700.6000	36.42	14.28	50.70	68.20	-17.50	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

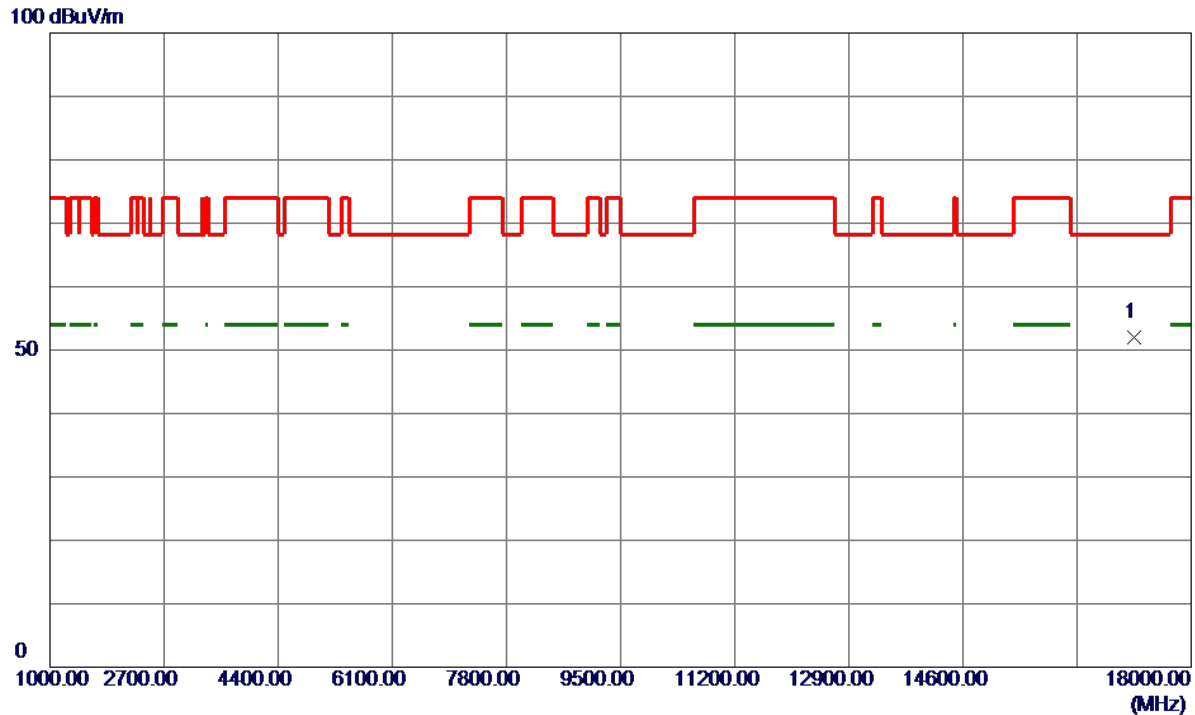


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17142.4000	37.12	14.92	52.04	68.20	-16.16	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

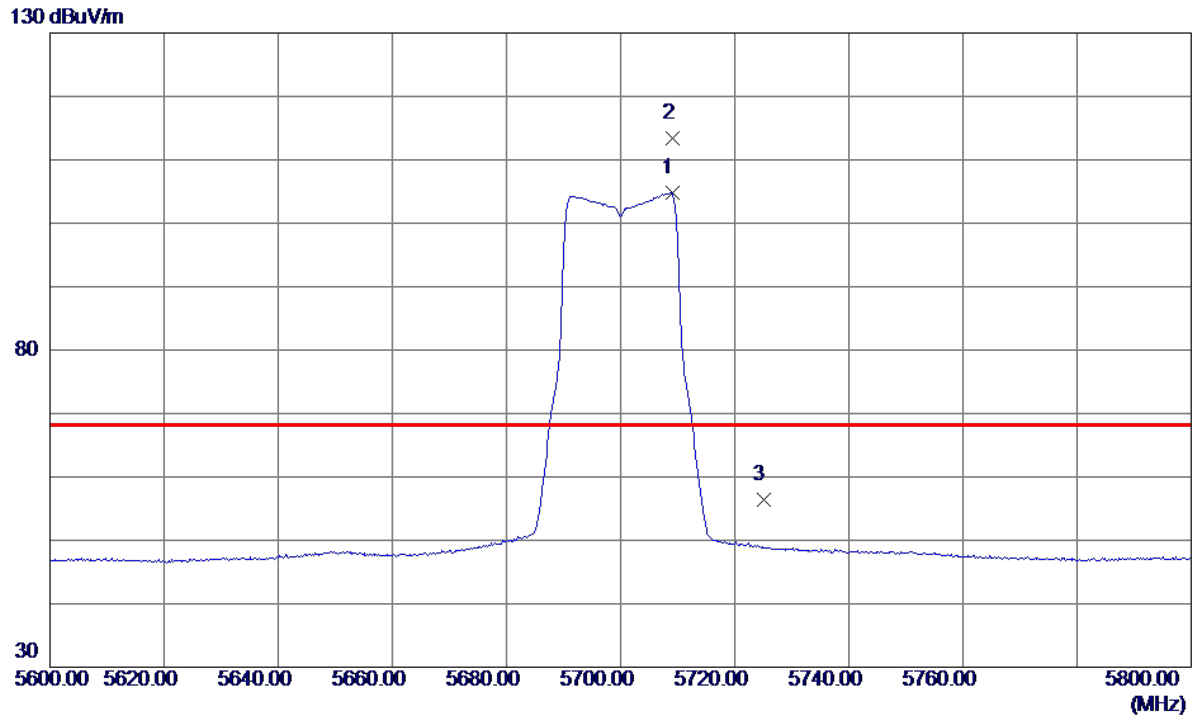


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5709.0000	88.65	16.17	104.82	999.00	-894.18	AVG	No Limit
2 *	5709.2000	97.16	16.17	113.33	68.20	45.13	Peak	No Limit
3	5725.0000	40.26	16.22	56.48	68.20	-11.72	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

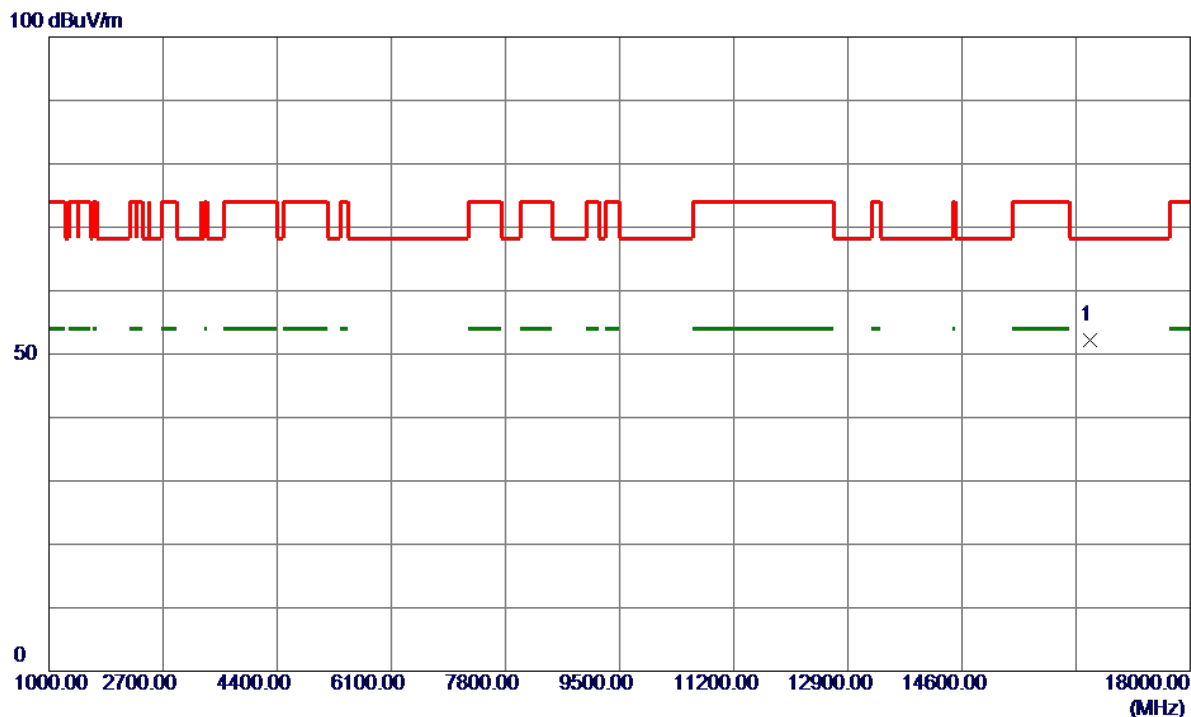


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16500.0000	38.27	14.02	52.29	68.20	-15.91	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

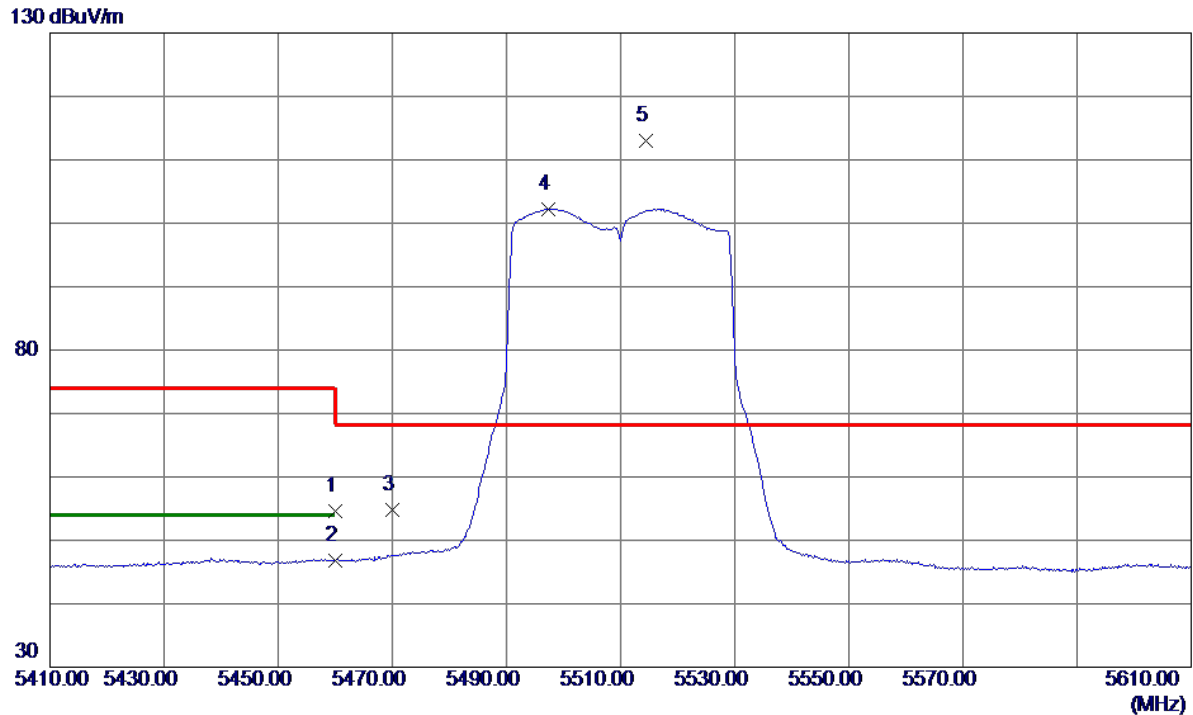


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	39.22	15.34	54.56	74.00	-19.44	Peak	
2	5460.0000	31.54	15.34	46.88	54.00	-7.12	AVG	
3	5470.0000	39.45	15.37	54.82	68.20	-13.38	Peak	
4	5497.4000	86.83	15.45	102.28	999.00	-896.72	AVG	No Limit
5 *	5514.4000	97.52	15.50	113.02	68.20	44.82	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

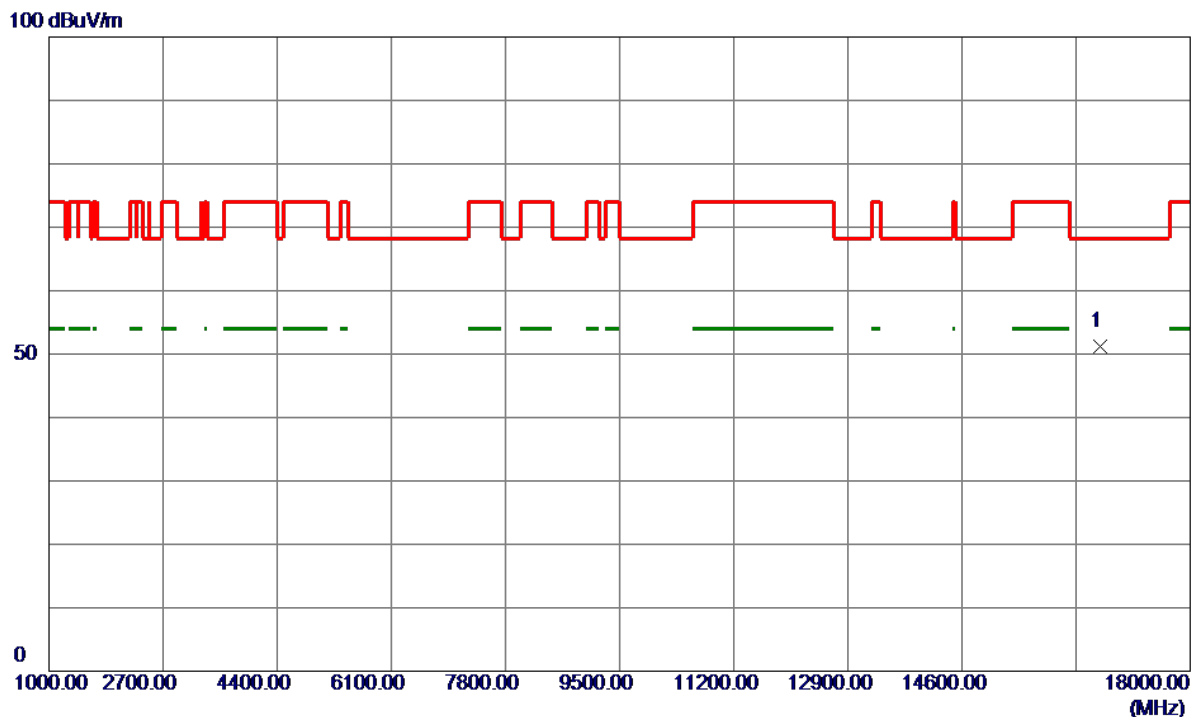


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16650.9000	36.90	14.22	51.12	68.20	-17.08	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

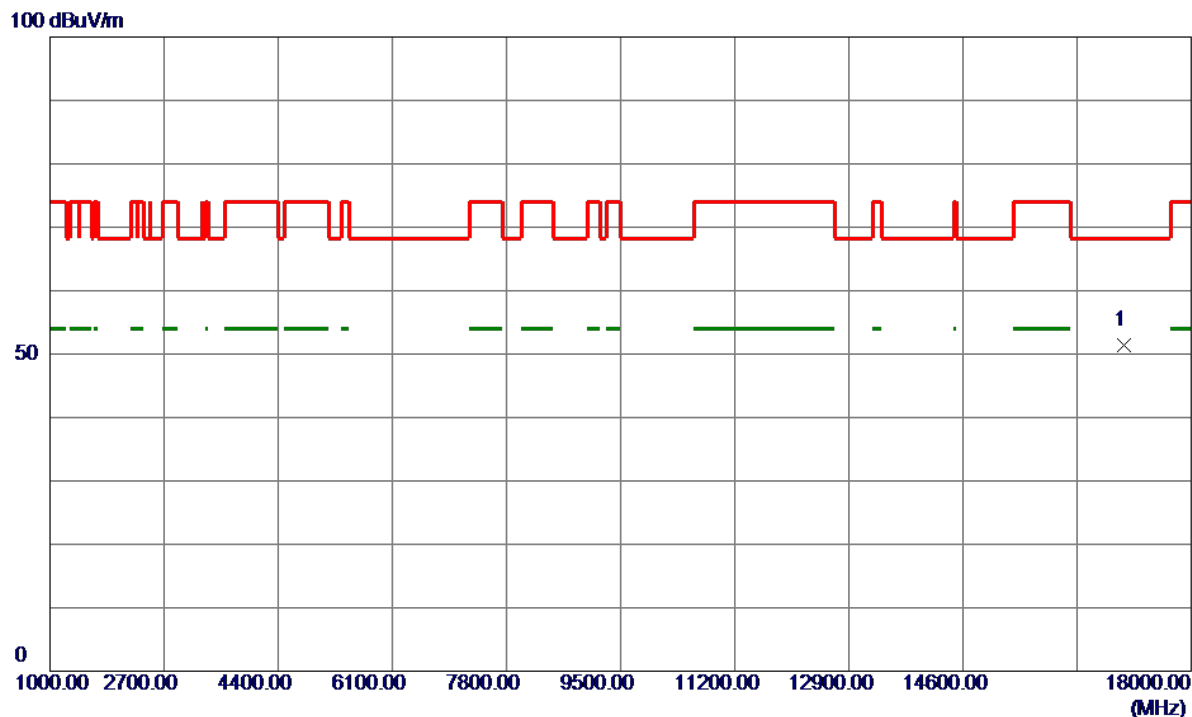


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16992.5000	36.79	14.65	51.44	68.20	-16.76	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

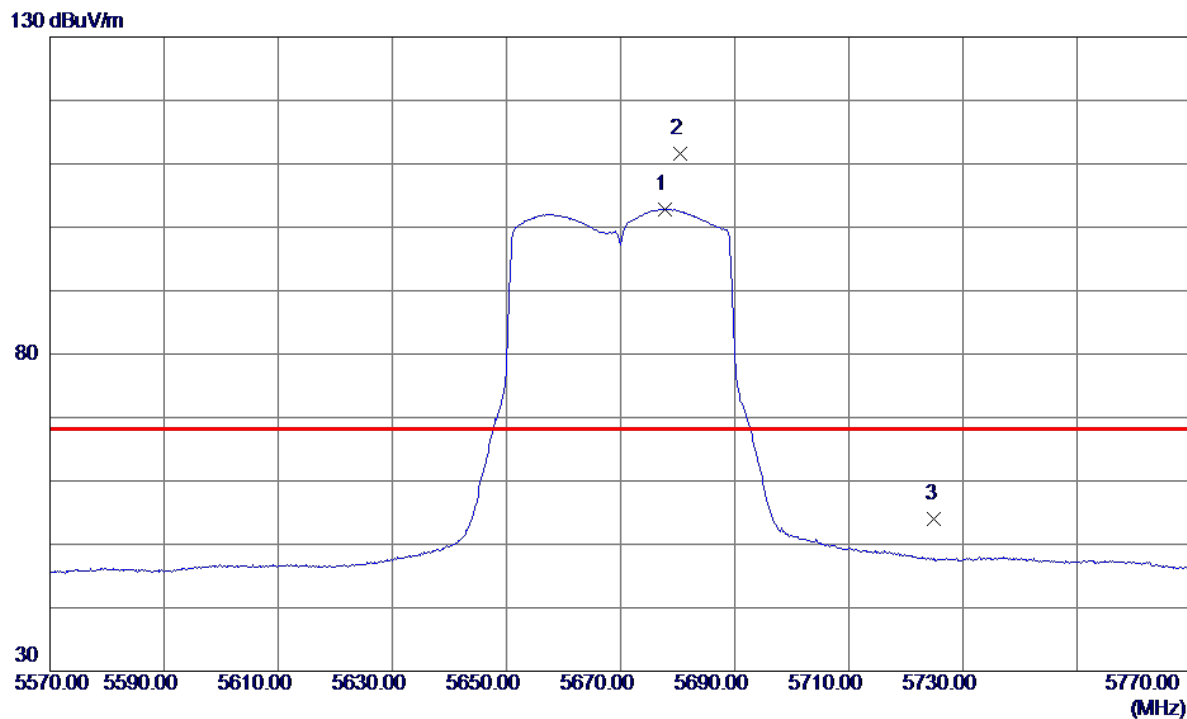


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5677.8000	86.83	16.06	102.89	999.00	-896.11	AVG	No Limit
2 *	5680.4000	95.47	16.07	111.54	68.20	43.34	Peak	No Limit
3	5725.0000	37.75	16.22	53.97	68.20	-14.23	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

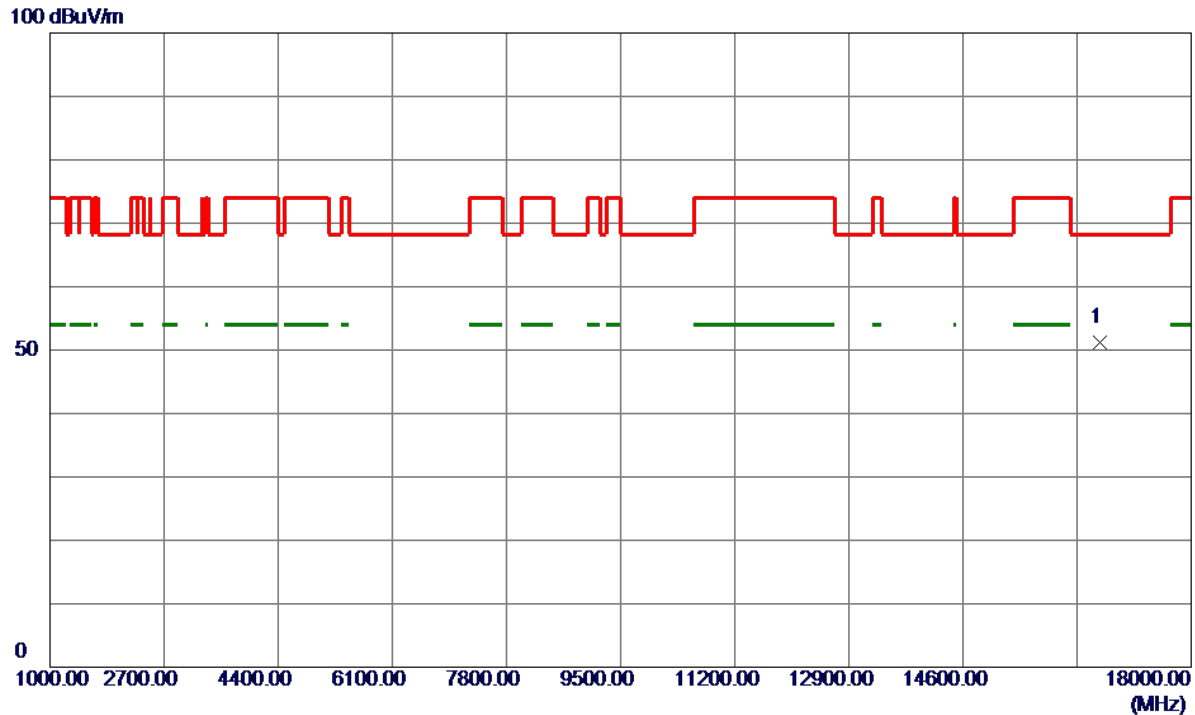


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16631.4000	36.95	14.19	51.14	68.20	-17.06	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

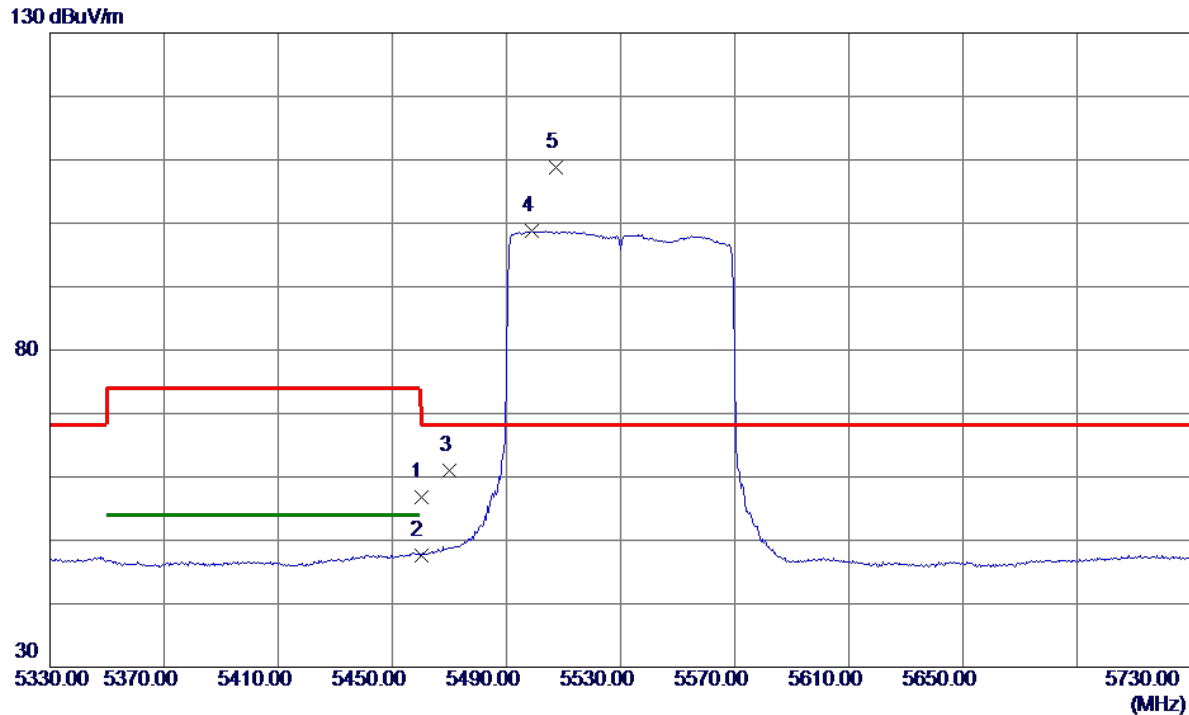


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	41.46	15.34	56.80	74.00	-17.20	Peak	
2	5460.0000	32.35	15.34	47.69	54.00	-6.31	AVG	
3	5470.0000	45.64	15.37	61.01	68.20	-7.19	Peak	
4	5498.8000	83.31	15.45	98.76	999.00	-900.24	AVG	No Limit
5 *	5507.2000	93.28	15.48	108.76	68.20	40.56	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

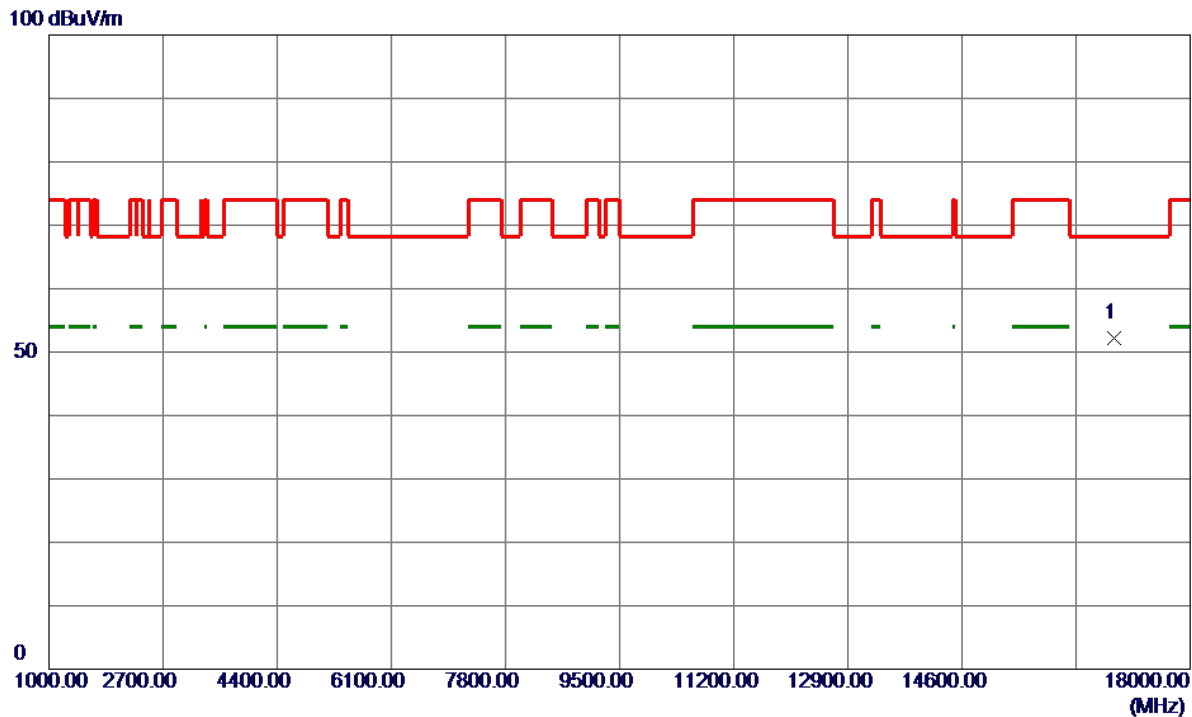


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16869.0000	37.66	14.49	52.15	68.20	-16.05	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

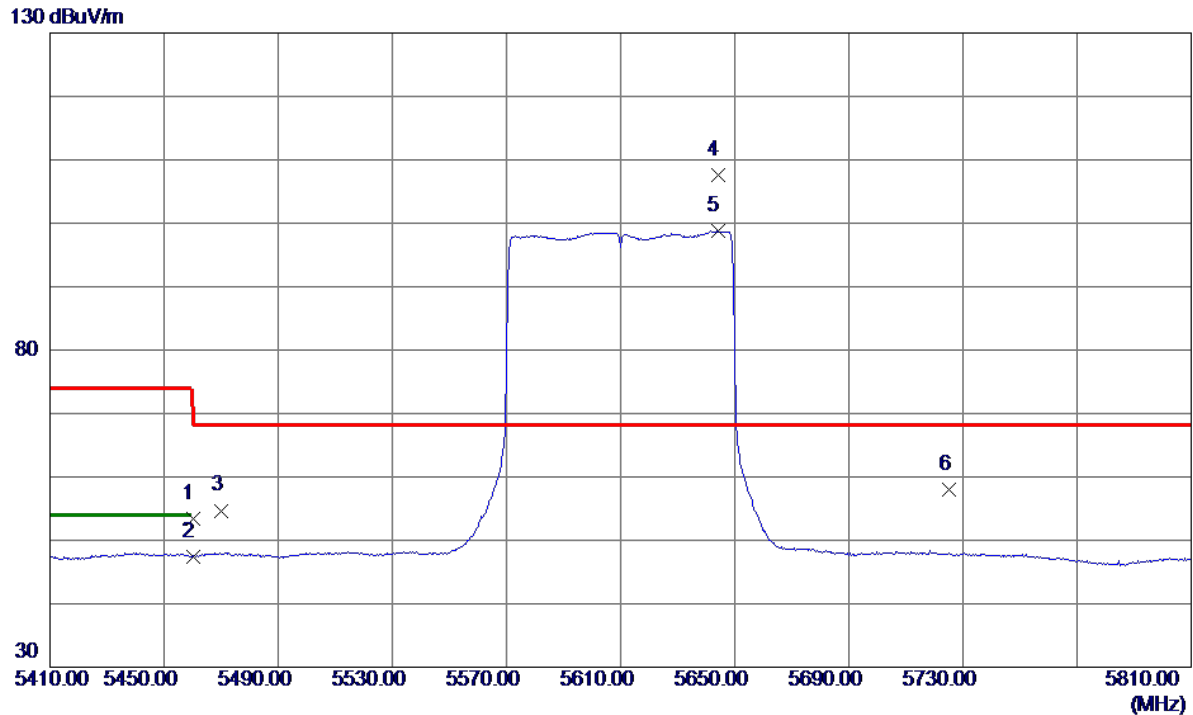


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	37.97	15.34	53.31	74.00	-20.69	Peak	
2	5460.0000	32.04	15.34	47.38	54.00	-6.62	AVG	
3	5470.0000	39.33	15.37	54.70	68.20	-13.50	Peak	
4 *	5644.0000	91.66	15.95	107.61	68.20	39.41	Peak	No Limit
5	5644.0000	82.81	15.95	98.76	999.00	-900.24	AVG	No Limit
6	5725.0000	41.71	16.22	57.93	68.20	-10.27	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

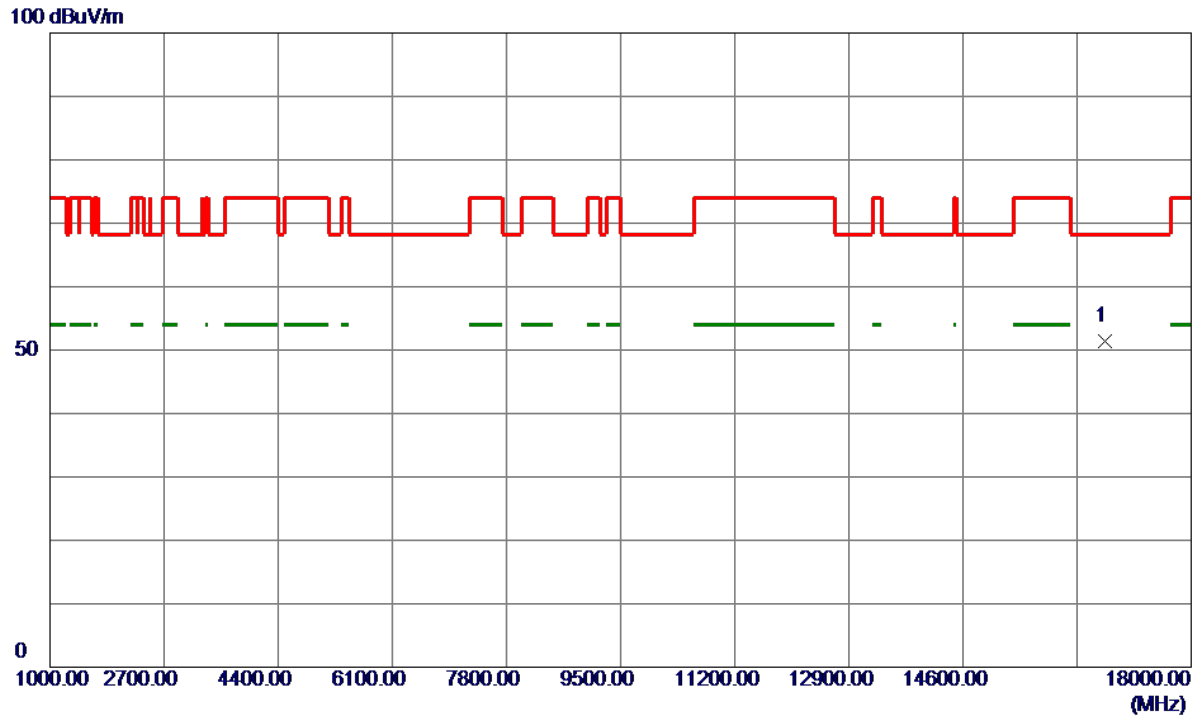


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16716.7000	37.04	14.30	51.34	68.20	-16.86	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT160) Mode 5570 MHz	Polarization	Horizontal
-----------	-------------------------------------	--------------	------------

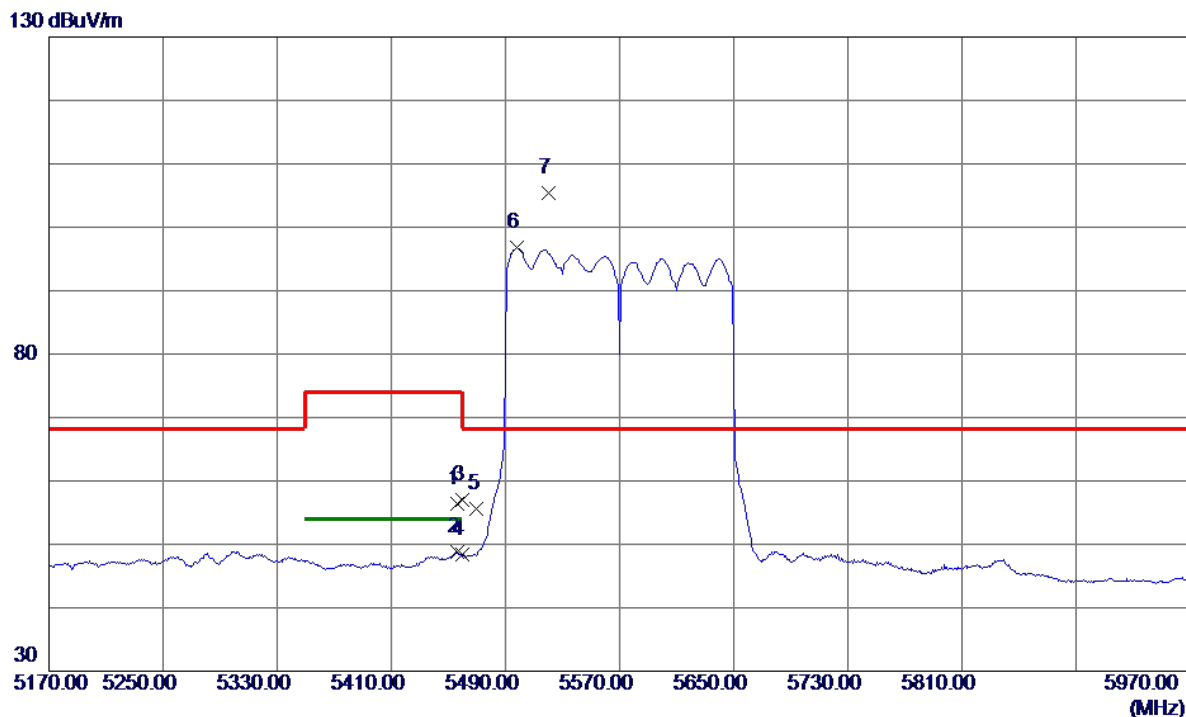


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5456.4000	41.09	15.33	56.42	74.00	-17.58	Peak	
2	5456.4000	33.40	15.33	48.73	54.00	-5.27	AVG	
3	5460.0000	41.67	15.34	57.01	74.00	-16.99	Peak	
4	5460.0000	33.01	15.34	48.35	54.00	-5.65	AVG	
5	5470.0000	40.24	15.37	55.61	68.20	-12.59	Peak	
6	5498.0000	81.30	15.45	96.75	999.00	-902.25	AVG	No Limit
7 *	5520.4000	89.84	15.52	105.36	68.20	37.16	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

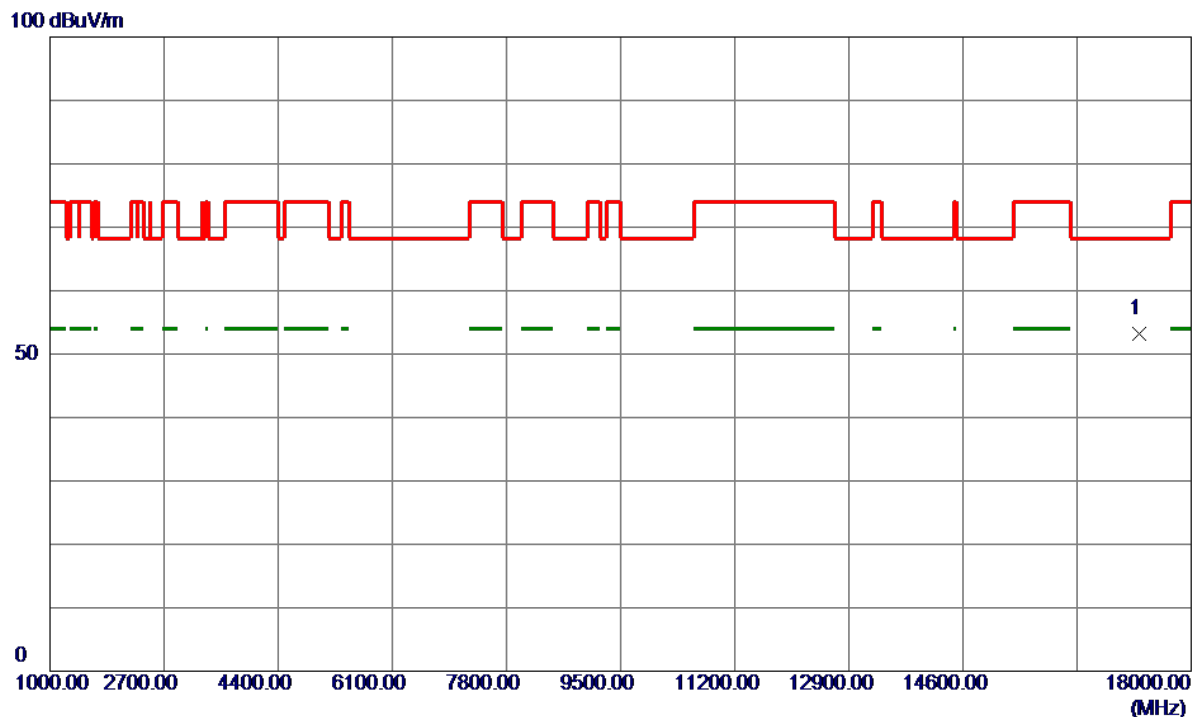


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17229.2500	38.09	15.07	53.16	68.20	-15.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

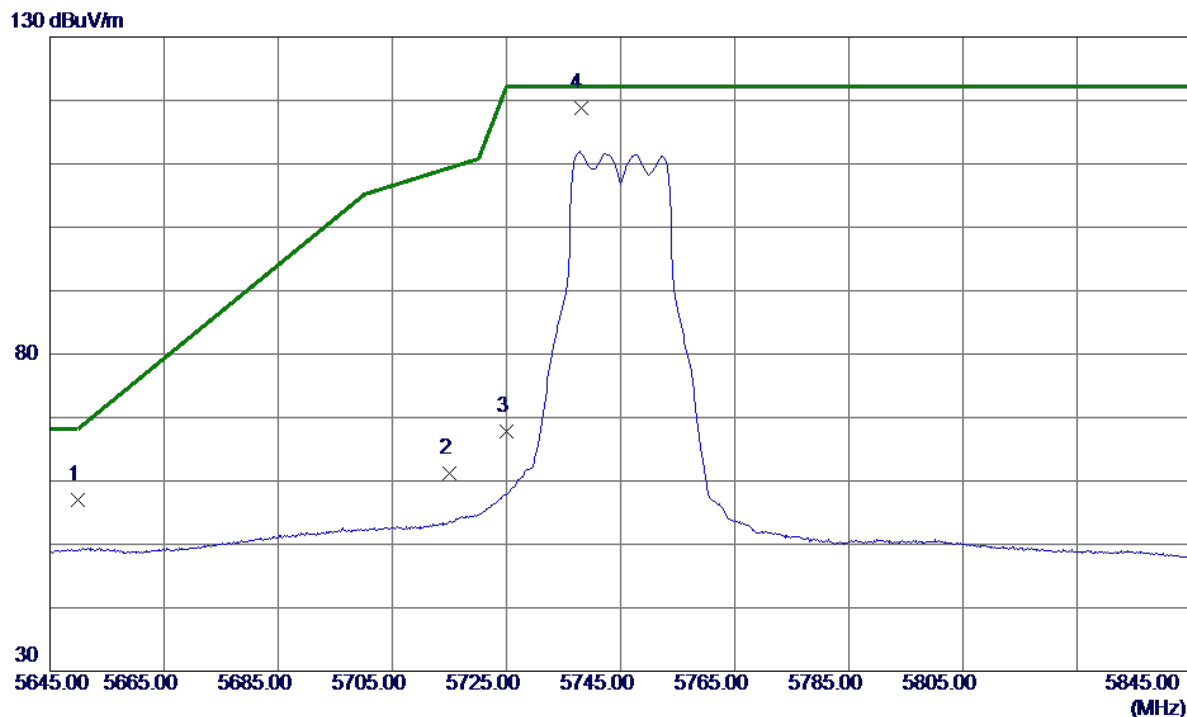


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5649.8000	41.01	15.97	56.98	68.20	-11.22	Peak	
2	5715.0000	44.96	16.19	61.15	109.40	-48.25	Peak	
3	5725.0000	51.50	16.22	67.72	122.20	-54.48	Peak	
4 *	5738.0000	102.54	16.27	118.81	122.20	-3.39	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

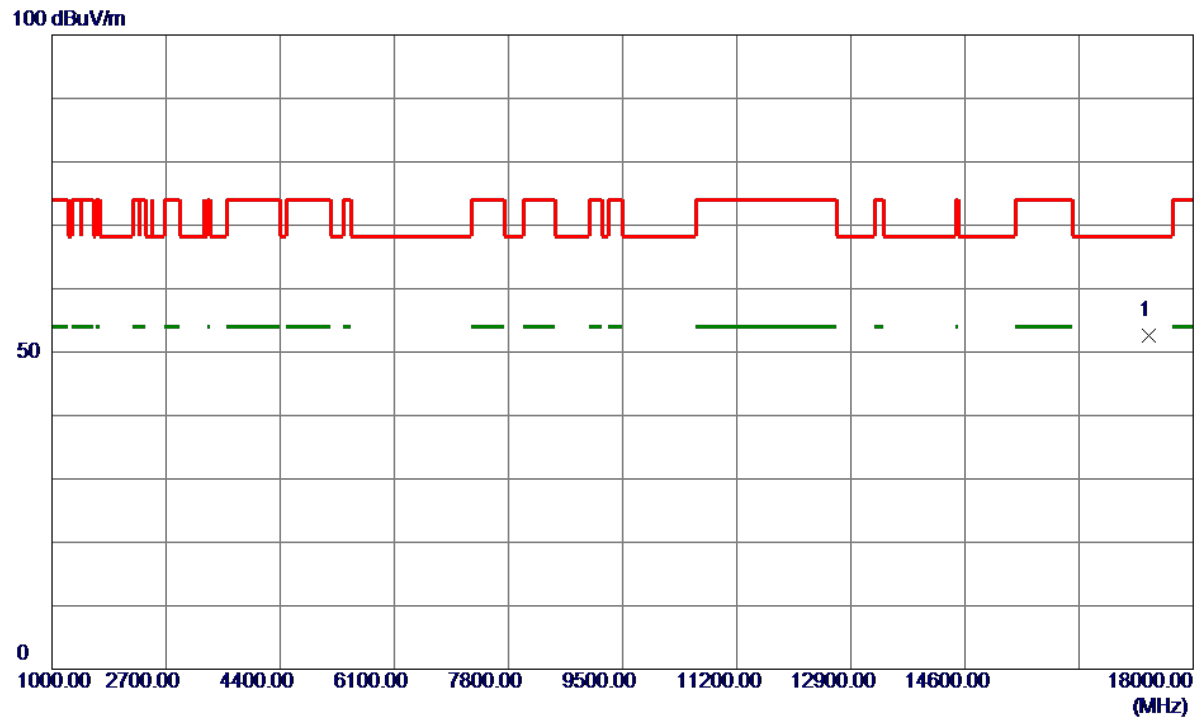


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17333.8000	37.32	15.26	52.58	68.20	-15.62	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

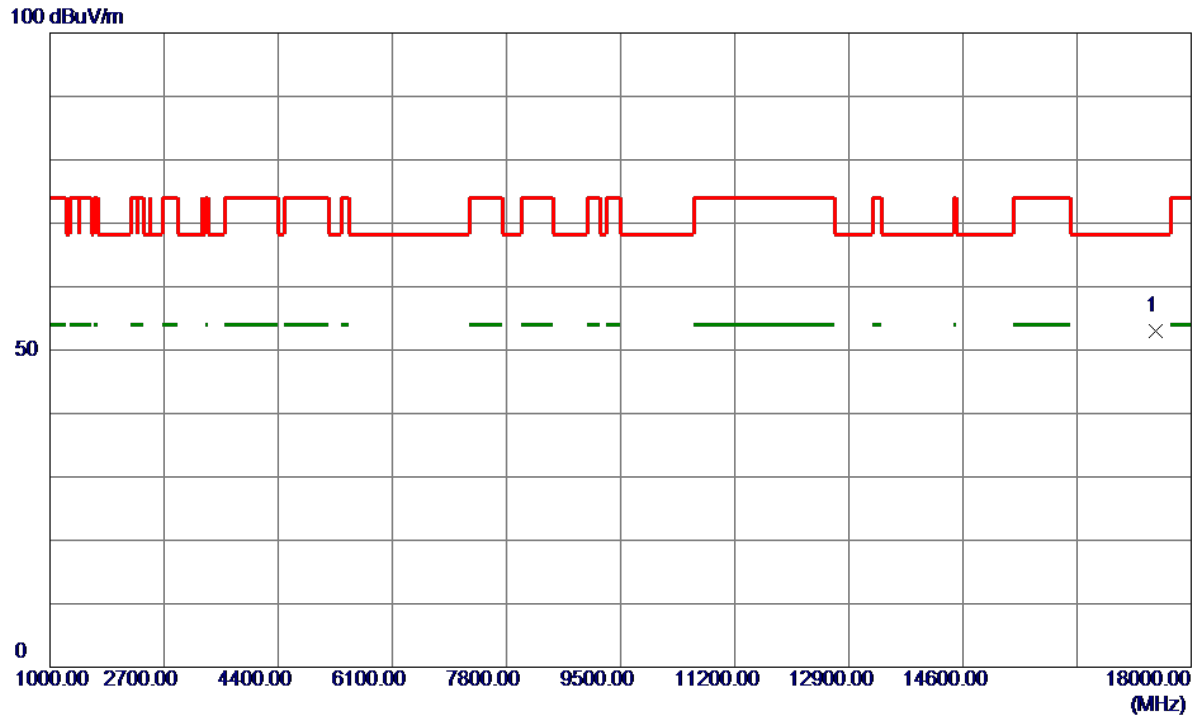


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17470.9000	37.43	15.51	52.94	68.20	-15.26	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

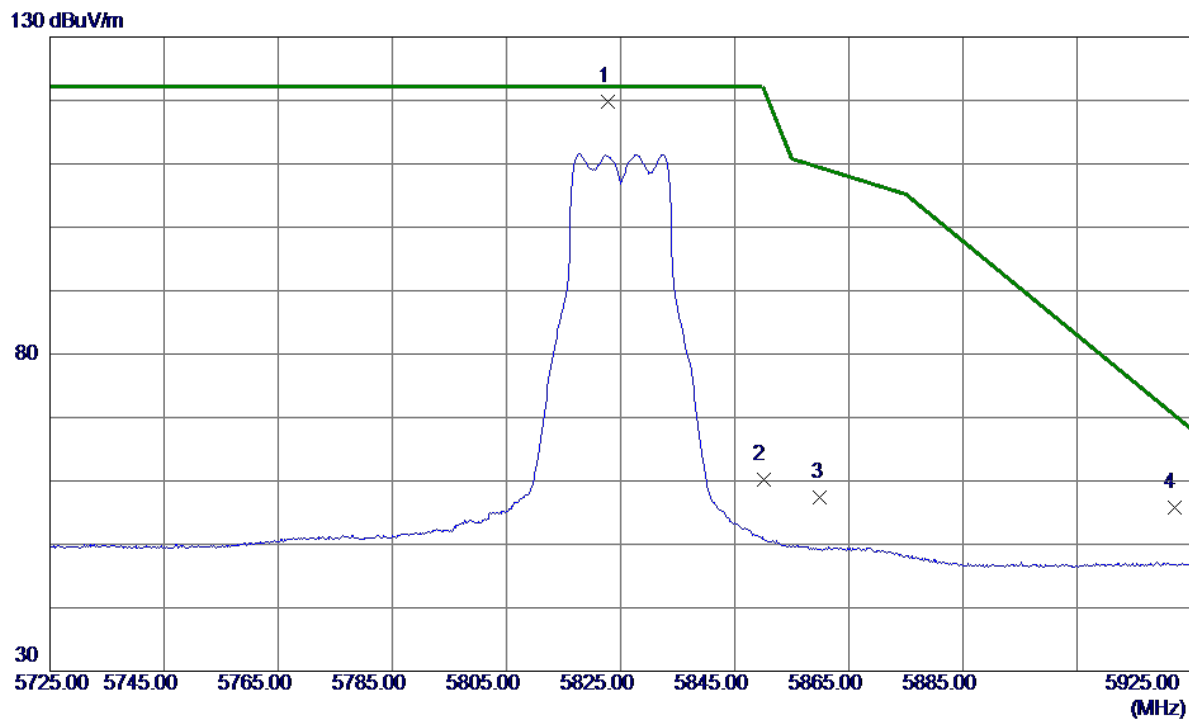


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5822.8000	103.33	16.56	119.89	122.20	-2.31	Peak	No Limit
2	5850.0000	43.48	16.65	60.13	122.20	-62.07	Peak	
3	5860.0000	40.78	16.68	57.46	109.40	-51.94	Peak	
4	5922.0000	38.82	16.89	55.71	70.42	-14.71	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

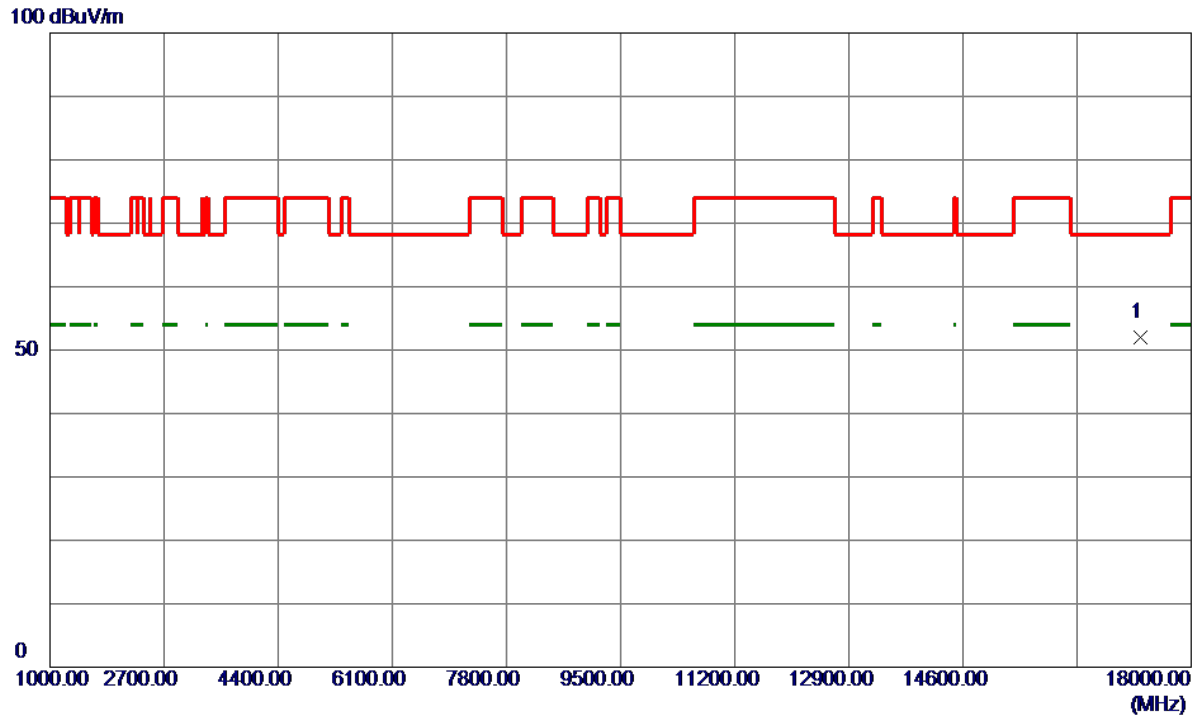


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17240.4000	36.84	15.10	51.94	68.20	-16.26	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

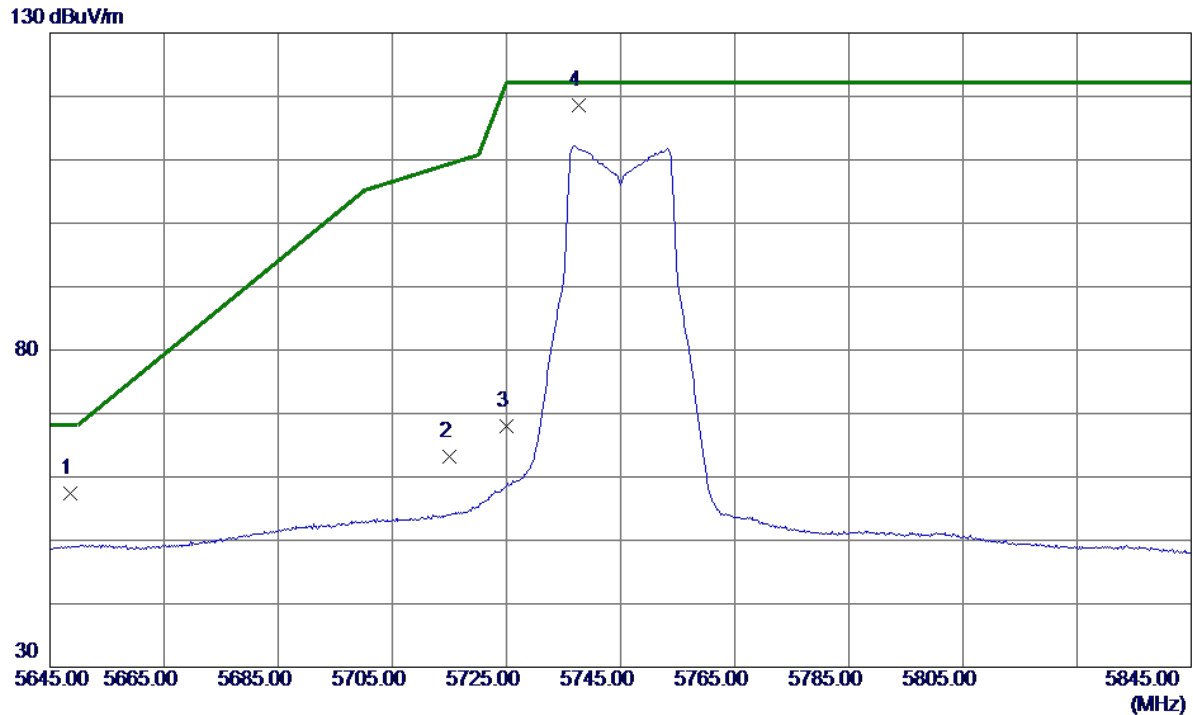


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5648.6000	41.39	15.96	57.35	68.20	-10.85	Peak	
2	5715.0000	46.96	16.19	63.15	109.40	-46.25	Peak	
3	5725.0000	51.76	16.22	67.98	122.20	-54.22	Peak	
4 *	5737.6000	102.41	16.27	118.68	122.20	-3.52	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

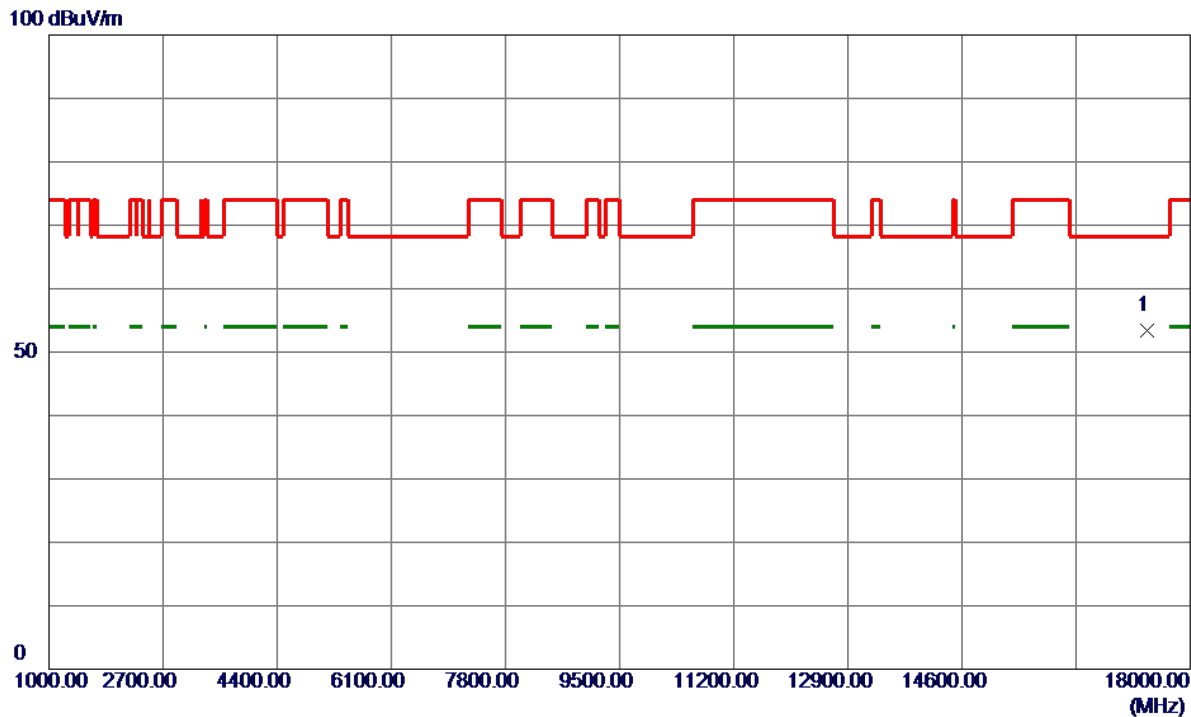


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17350.7500	38.16	15.29	53.45	68.20	-14.75	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

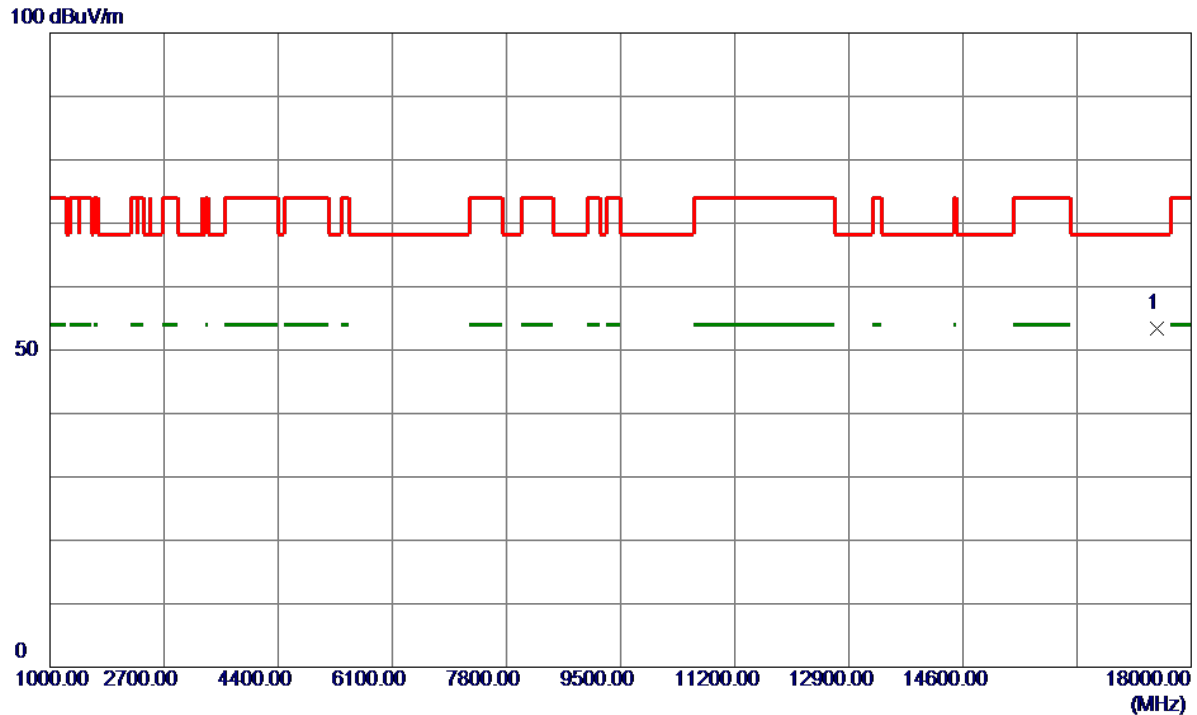


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17494.8500	37.93	15.56	53.49	68.20	-14.71	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

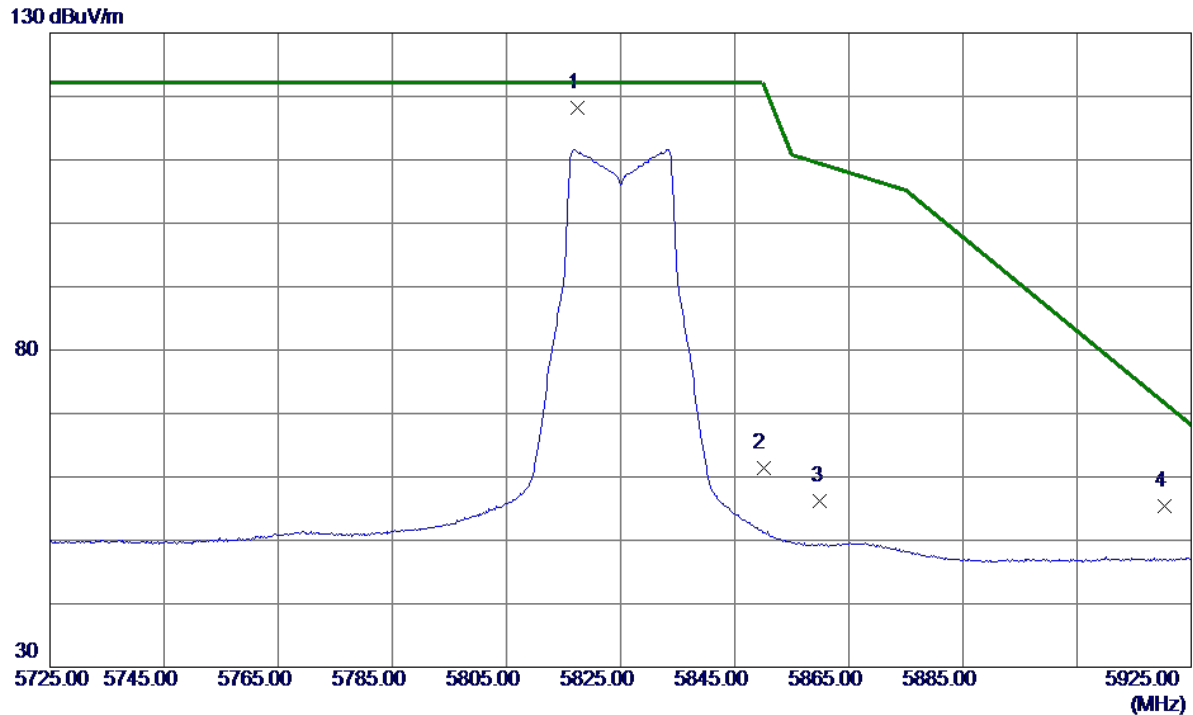


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5817.4000	101.76	16.54	118.30	122.20	-3.90	Peak	No Limit
2	5850.0000	44.70	16.65	61.35	122.20	-60.85	Peak	
3	5860.0000	39.48	16.68	56.16	109.40	-53.24	Peak	
4	5920.4000	38.55	16.89	55.44	71.60	-16.16	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

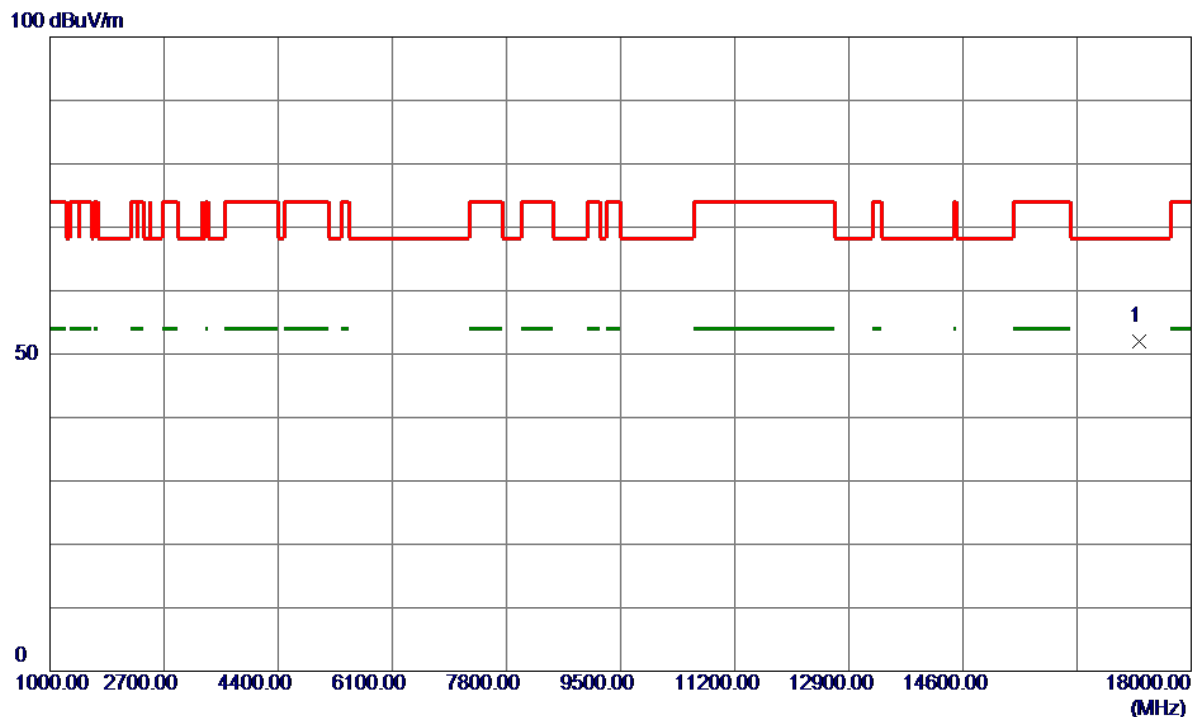


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17223.2000	36.86	15.06	51.92	68.20	-16.28	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

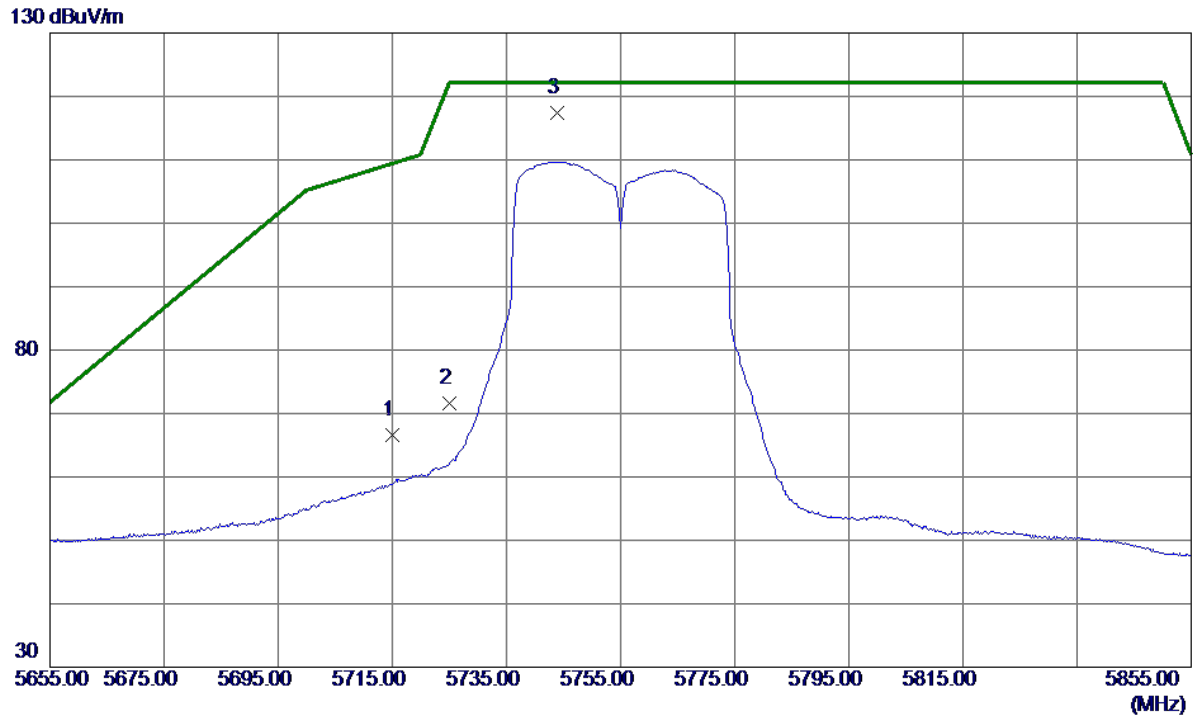


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	50.41	16.19	66.60	109.40	-42.80	Peak	
2	5725.0000	55.35	16.22	71.57	122.20	-50.63	Peak	
3 *	5743.8000	101.15	16.29	117.44	122.20	-4.76	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

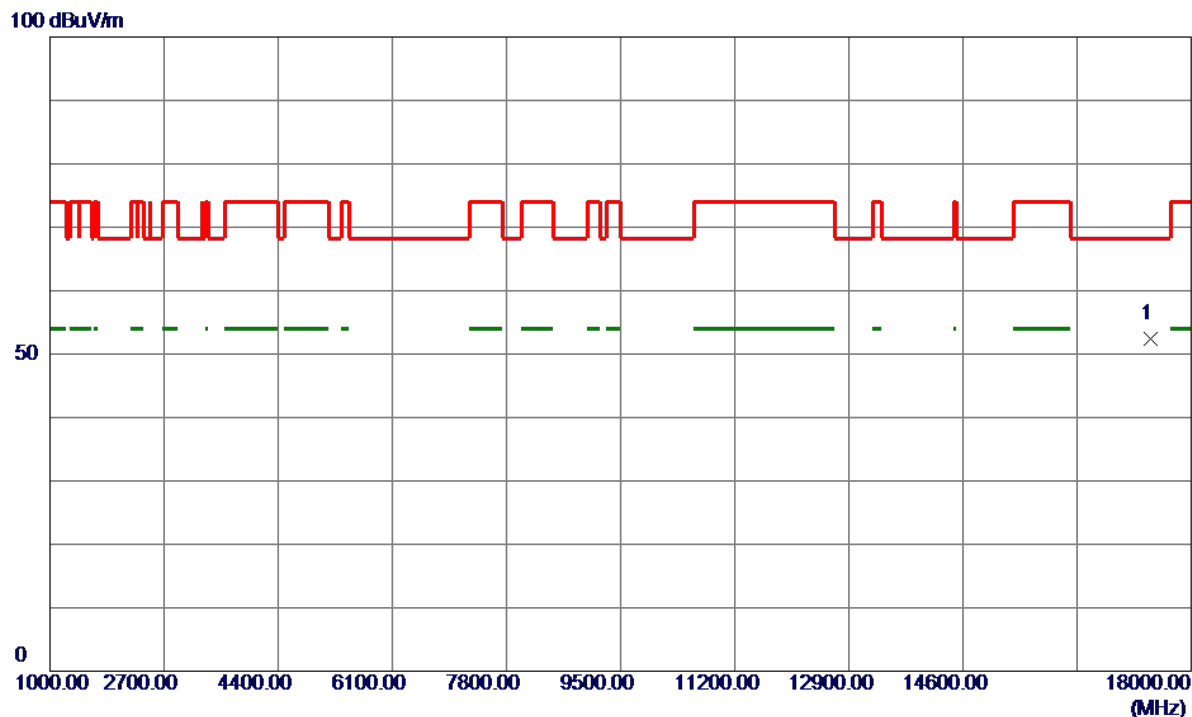


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17393.5000	37.10	15.37	52.47	68.20	-15.73	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

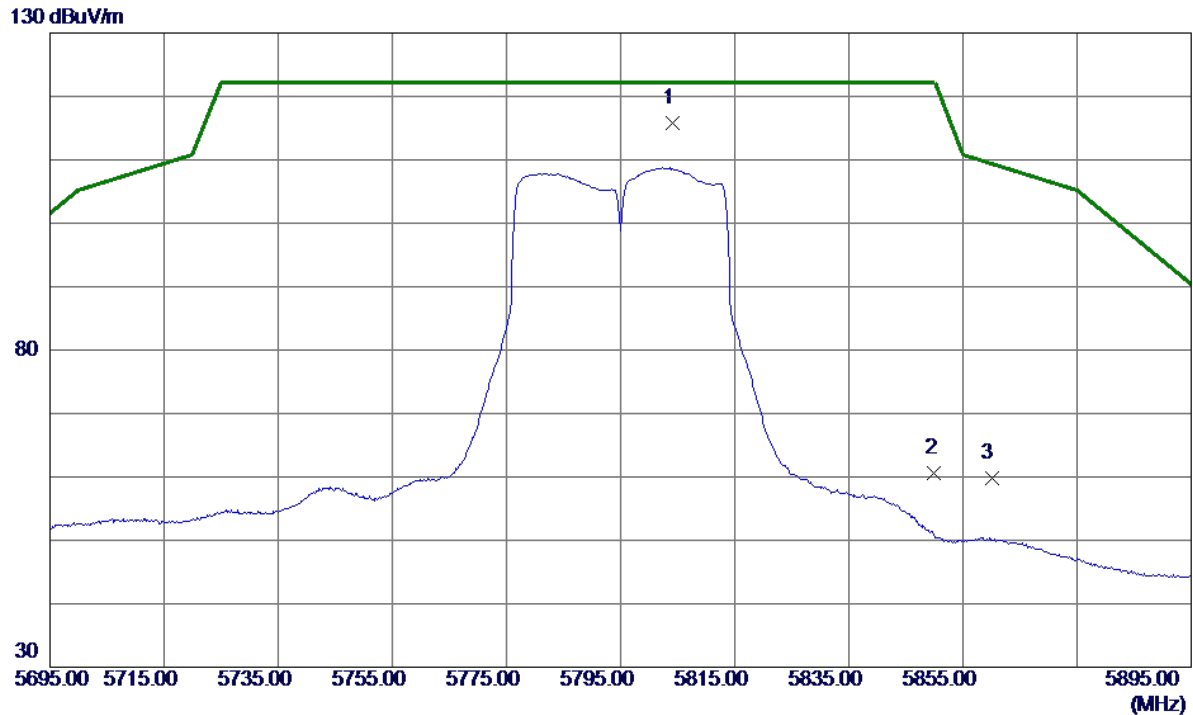


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5804.2000	99.28	16.49	115.77	122.20	-6.43	Peak	No Limit
2	5850.0000	43.99	16.65	60.64	122.20	-61.56	Peak	
3	5860.0000	43.09	16.68	59.77	109.40	-49.63	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

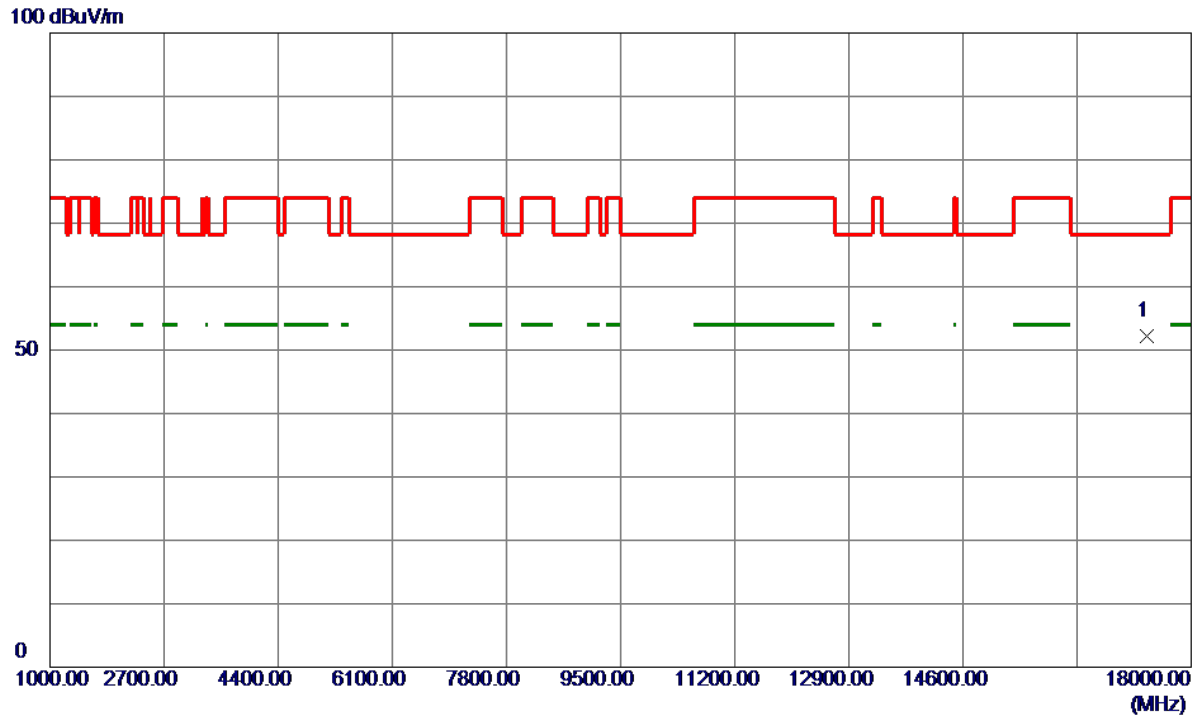


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17332.9000	36.92	15.26	52.18	68.20	-16.02	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

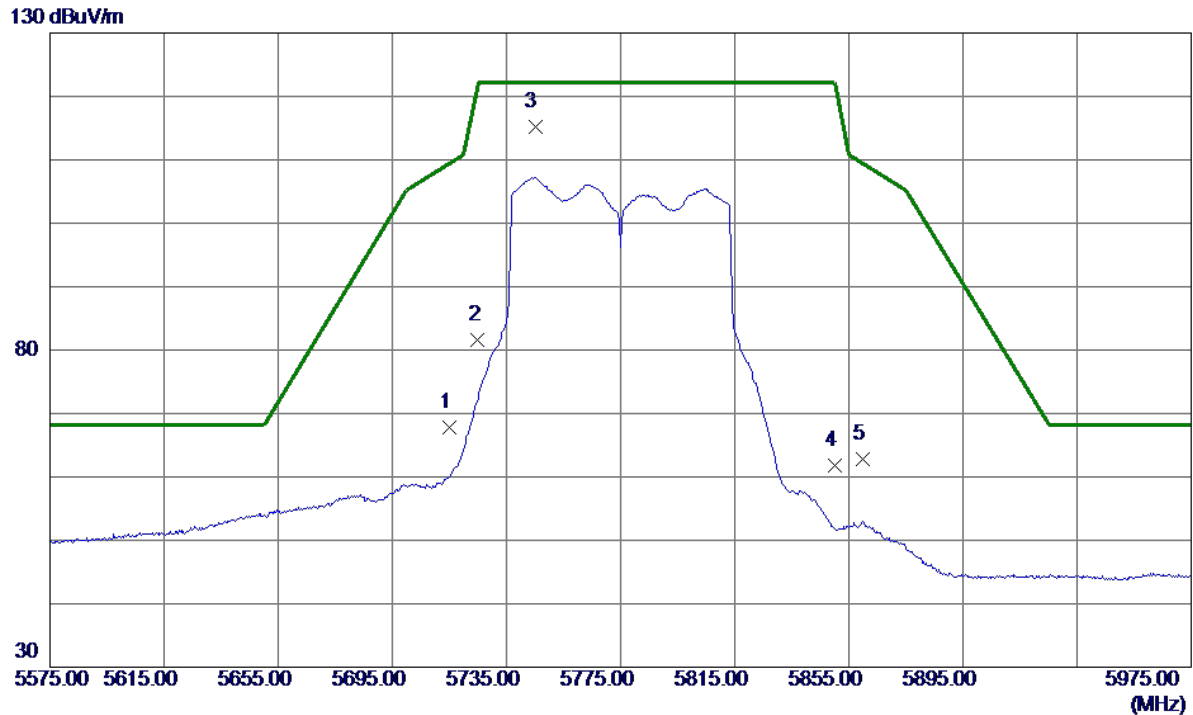


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	51.56	16.19	67.75	109.40	-41.65	Peak	
2	5725.0000	65.44	16.22	81.66	122.20	-40.54	Peak	
3 *	5745.0000	98.87	16.29	115.16	122.20	-7.04	Peak	No Limit
4	5850.0000	45.23	16.65	61.88	122.20	-60.32	Peak	
5	5860.0000	46.06	16.68	62.74	109.40	-46.66	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

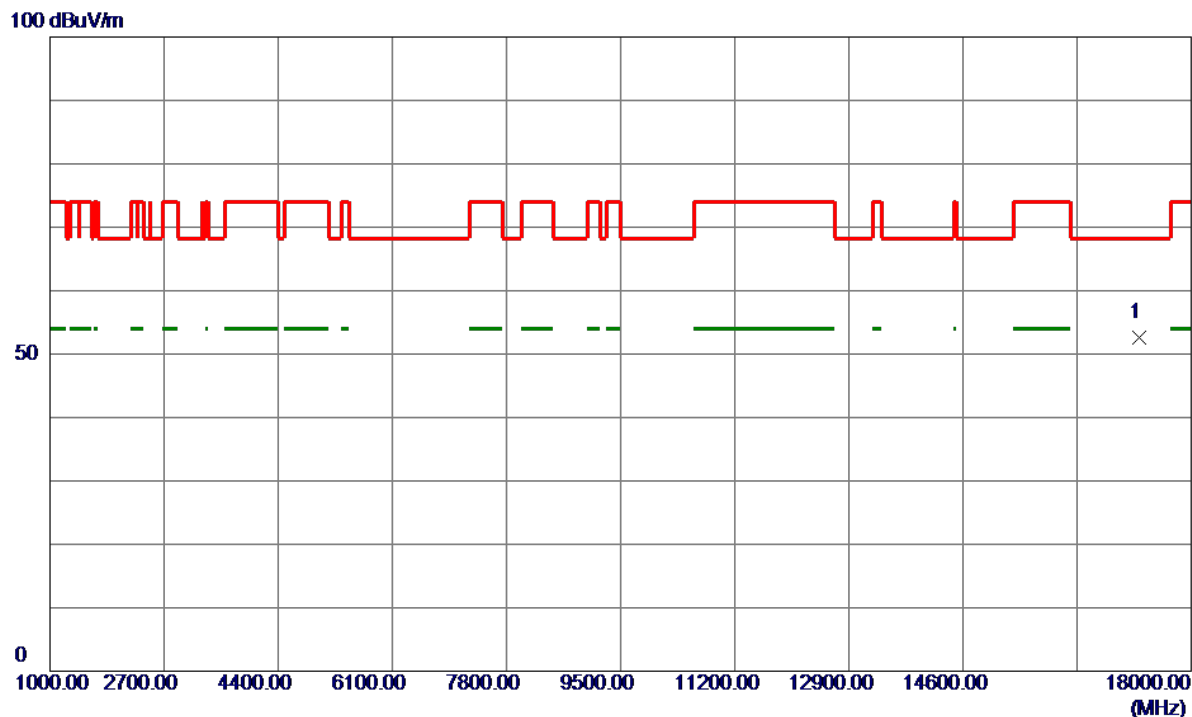


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17218.7000	37.52	15.06	52.58	68.20	-15.62	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

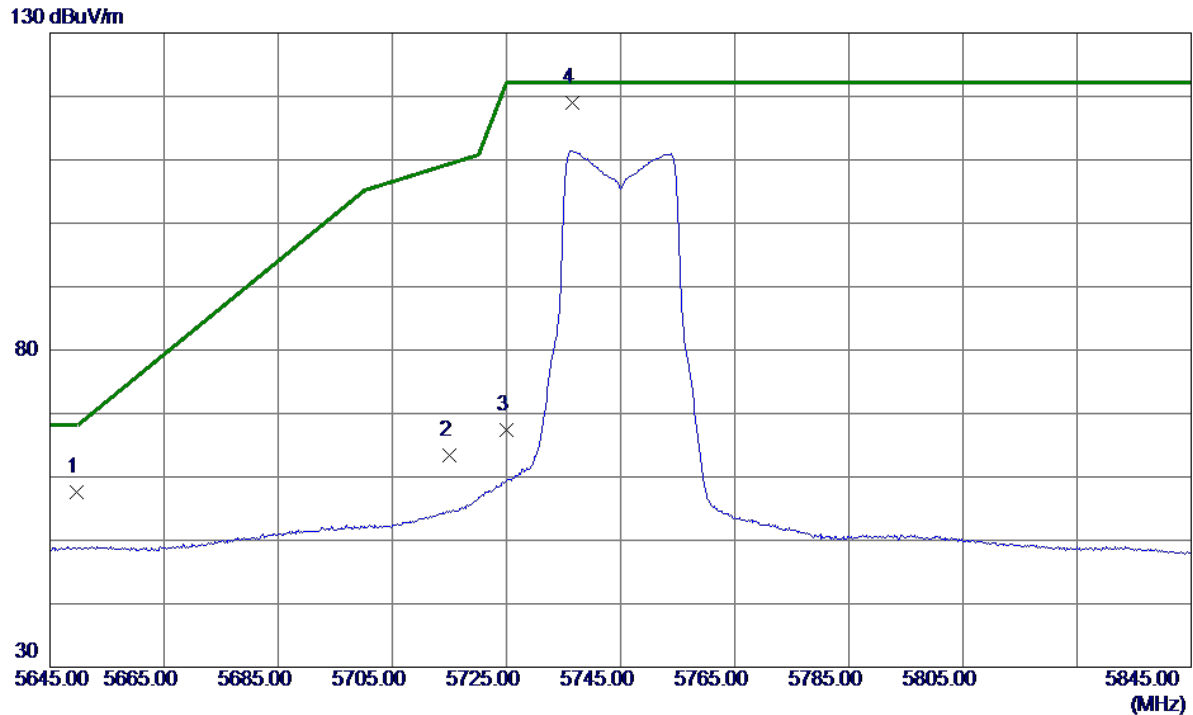


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5649.6000	41.57	15.96	57.53	68.20	-10.67	Peak	
2	5715.0000	47.23	16.19	63.42	109.40	-45.98	Peak	
3	5725.0000	51.17	16.22	67.39	122.20	-54.81	Peak	
4 *	5736.6000	102.83	16.26	119.09	122.20	-3.11	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

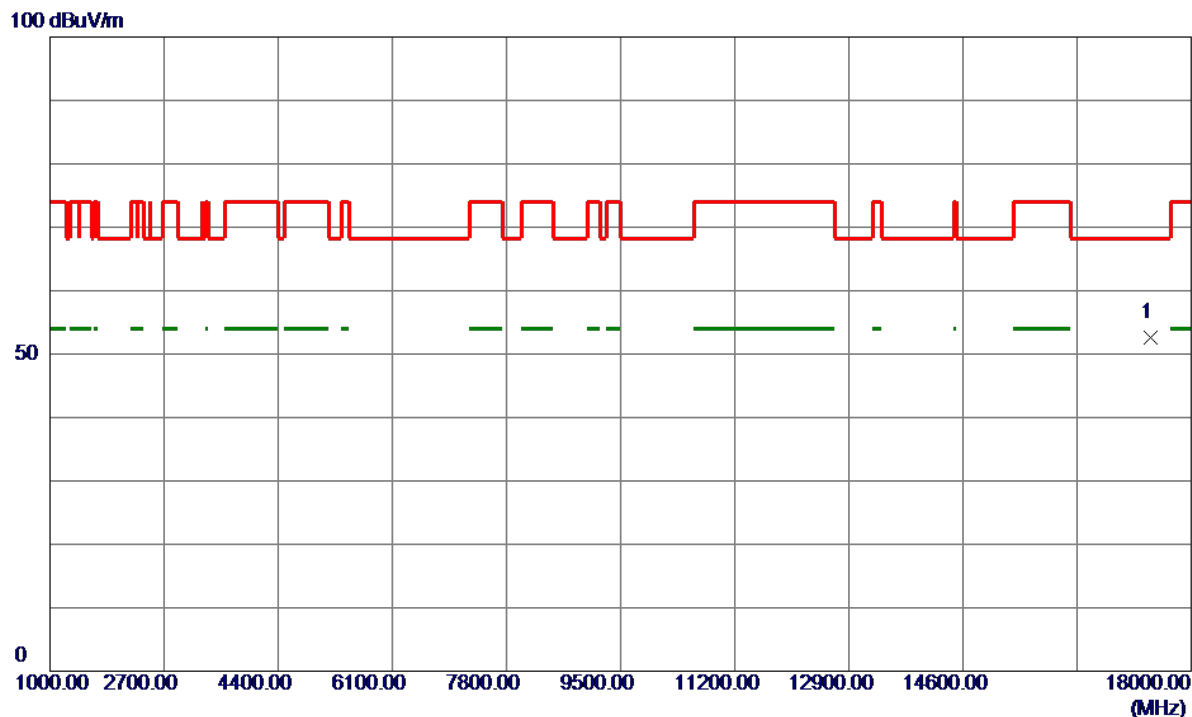


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17393.8000	37.31	15.37	52.68	68.20	-15.52	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

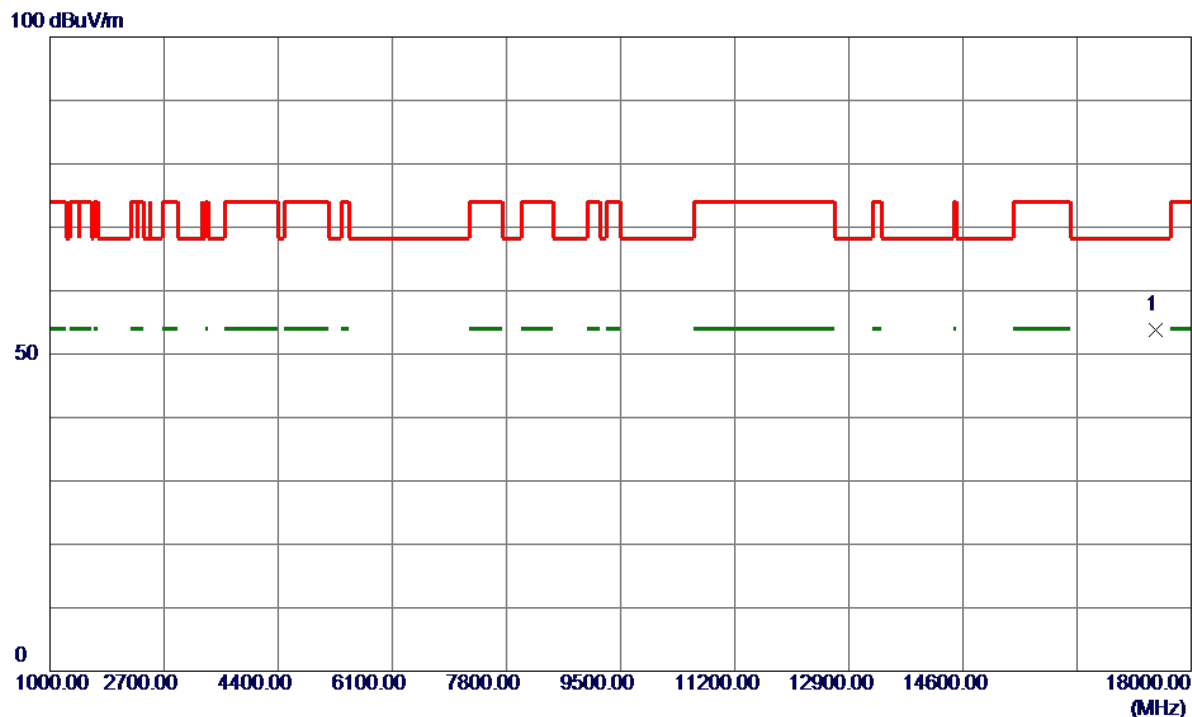


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17463.0000	38.27	15.50	53.77	68.20	-14.43	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

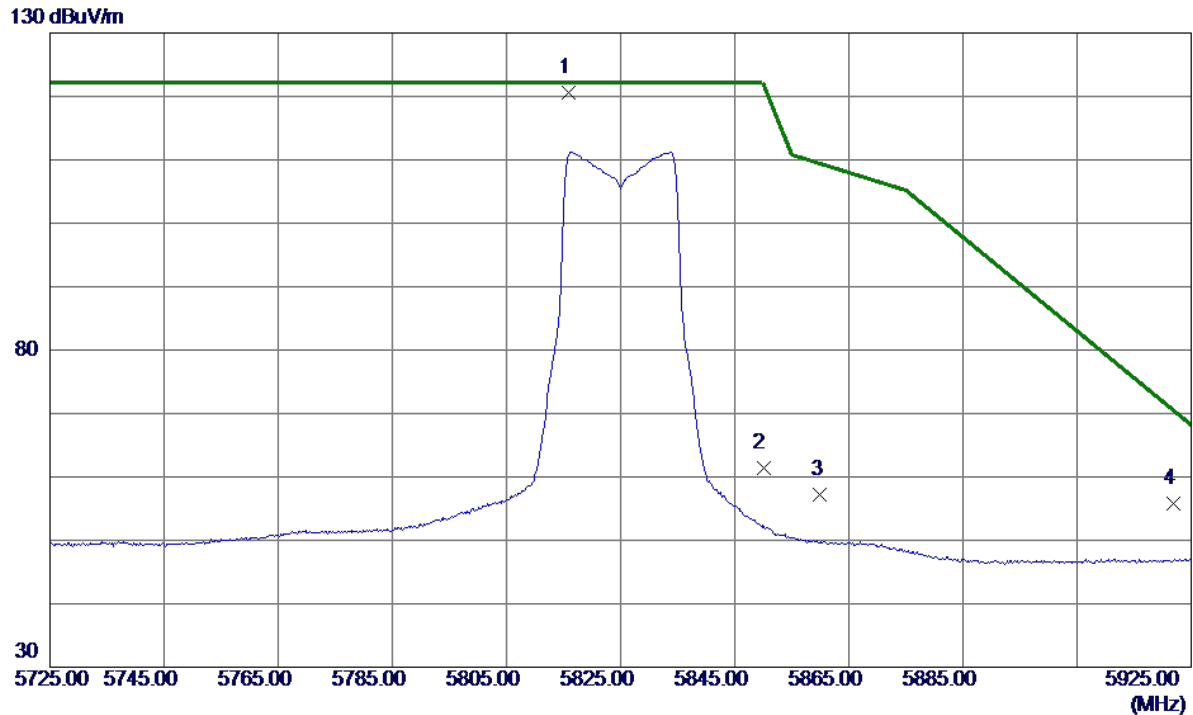


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5815.8000	104.05	16.53	120.58	122.20	-1.62	Peak	No Limit
2	5850.0000	44.69	16.65	61.34	122.20	-60.86	Peak	
3	5860.0000	40.59	16.68	57.27	109.40	-52.13	Peak	
4	5921.8000	38.87	16.89	55.76	70.57	-14.81	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

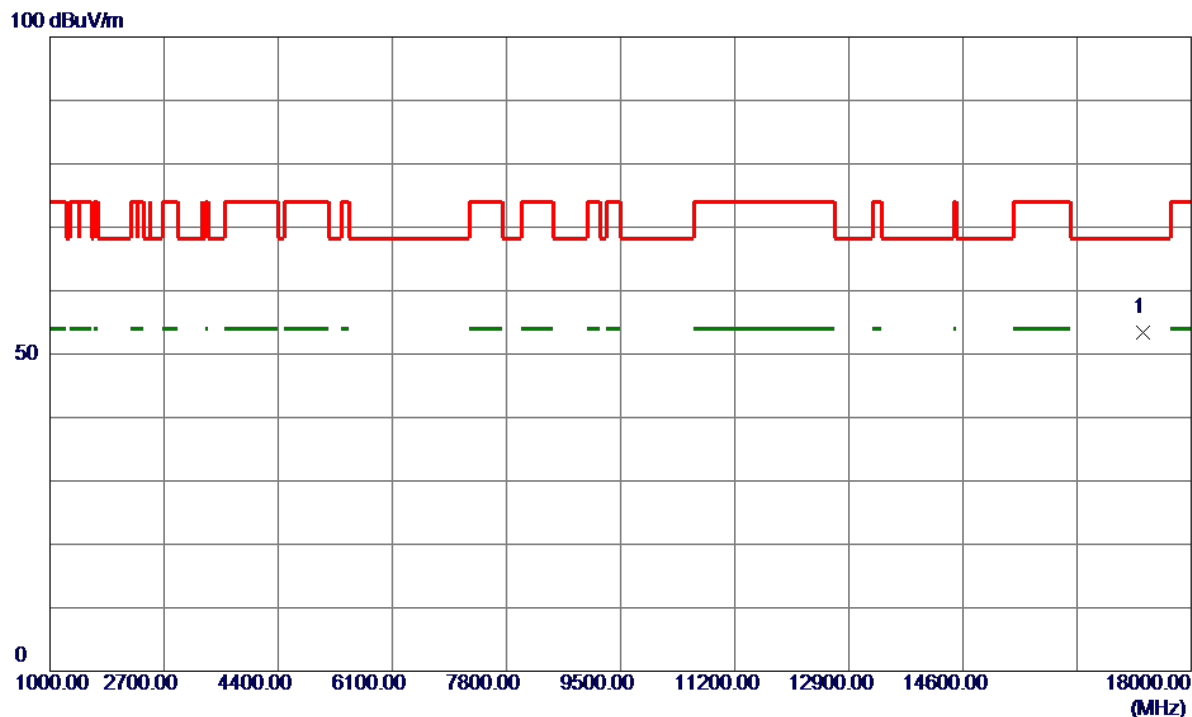


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17284.5000	38.19	15.17	53.36	68.20	-14.84	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

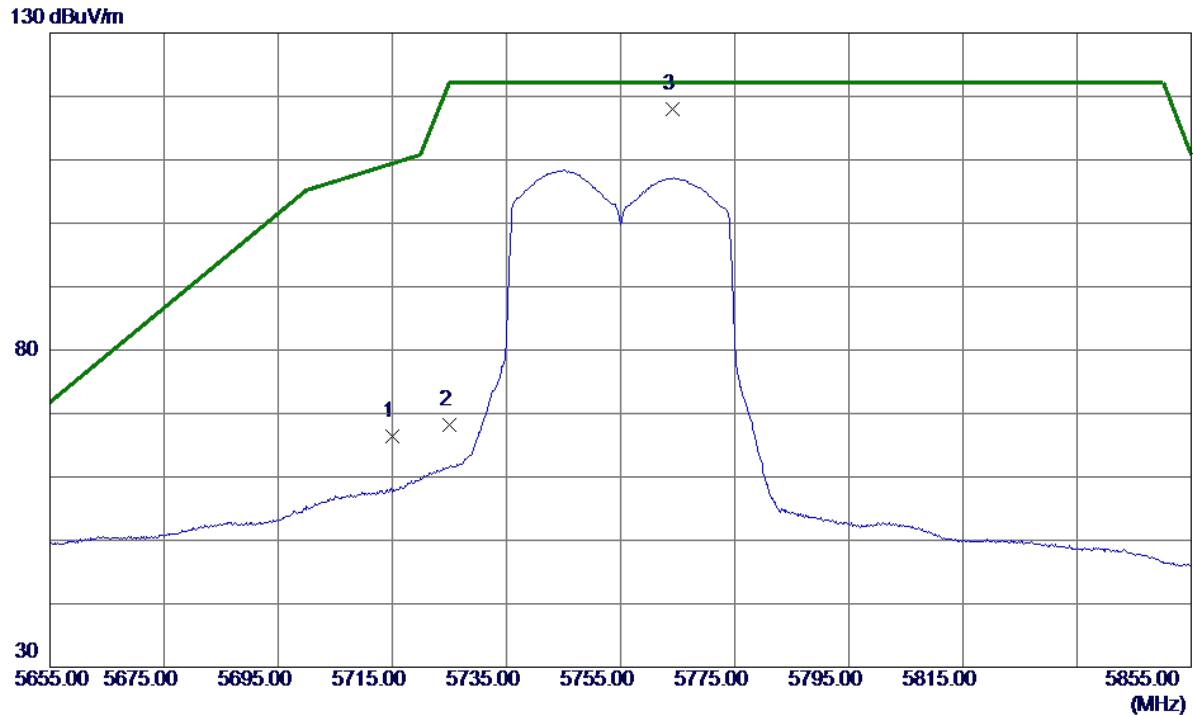


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	50.16	16.19	66.35	109.40	-43.05	Peak	
2	5725.0000	52.03	16.22	68.25	122.20	-53.95	Peak	
3 *	5764.2000	101.70	16.36	118.06	122.20	-4.14	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

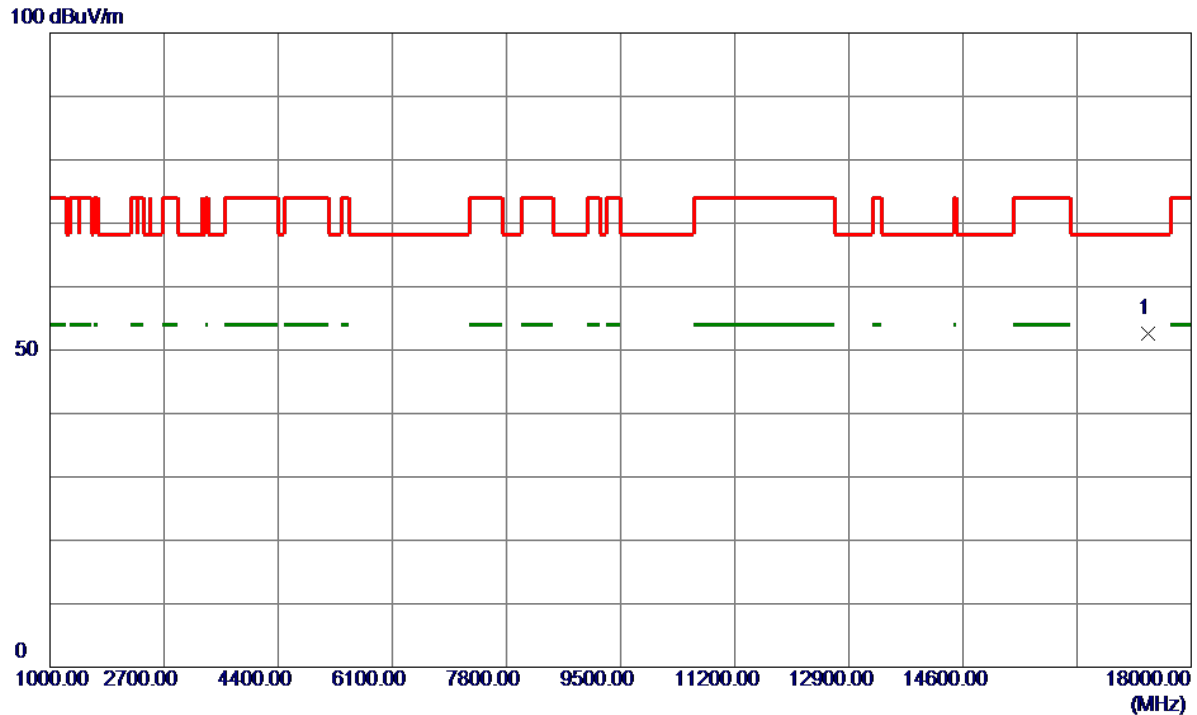


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17353.8000	37.25	15.30	52.55	68.20	-15.65	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

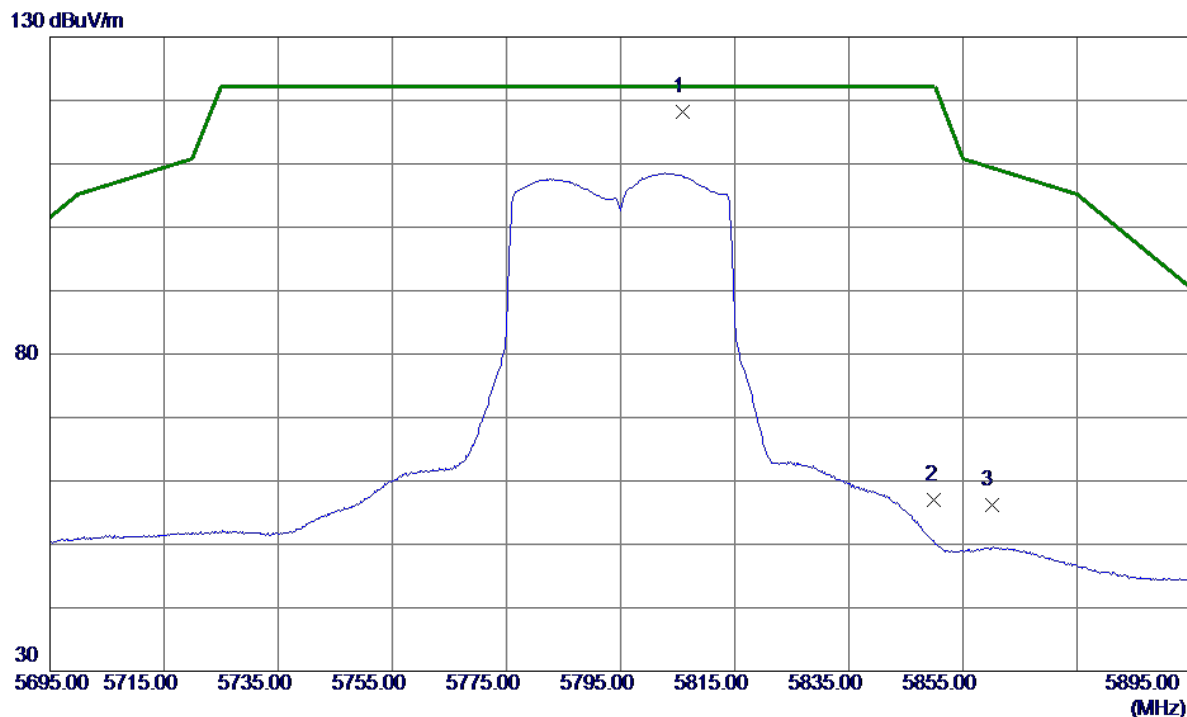


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5805.8000	101.76	16.50	118.26	122.20	-3.94	Peak	No Limit
2	5850.0000	40.32	16.65	56.97	122.20	-65.23	Peak	
3	5860.0000	39.54	16.68	56.22	109.40	-53.18	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

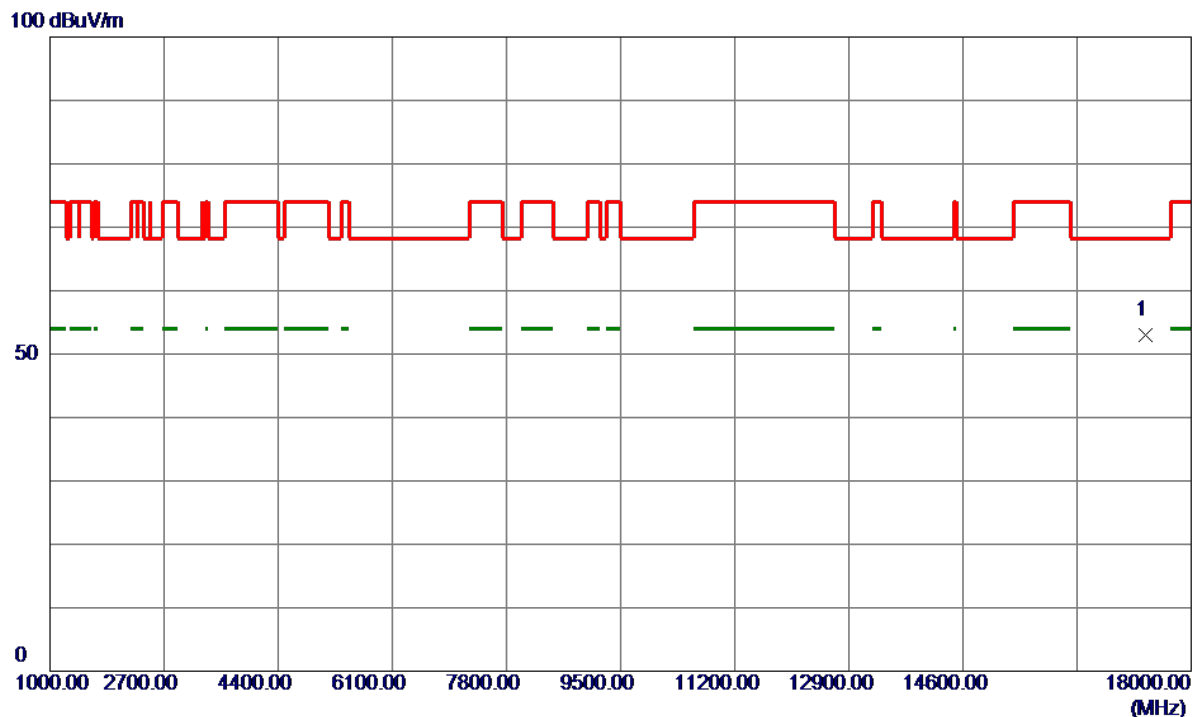


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17326.8000	37.84	15.25	53.09	68.20	-15.11	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

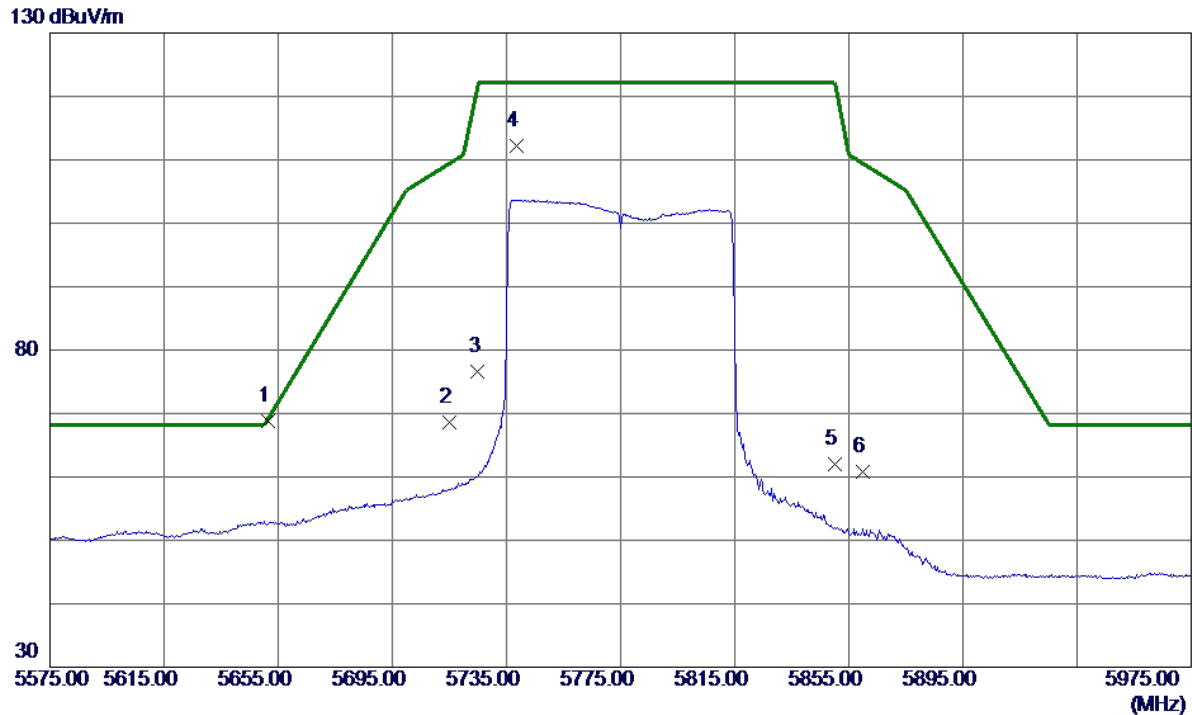

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5651.4000	52.82	15.97	68.79	69.24	-0.45	Peak	
2	5715.0000	52.44	16.19	68.63	109.40	-40.77	Peak	
3	5725.0000	60.44	16.22	76.66	122.20	-45.54	Peak	
4	5738.6000	95.84	16.27	112.11	122.20	-10.09	Peak	No Limit
5	5850.0000	45.35	16.65	62.00	122.20	-60.20	Peak	
6	5860.0000	44.16	16.68	60.84	109.40	-48.56	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Straddle channel:

Test Mode	UNII-2C_TX A Mode 5720 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

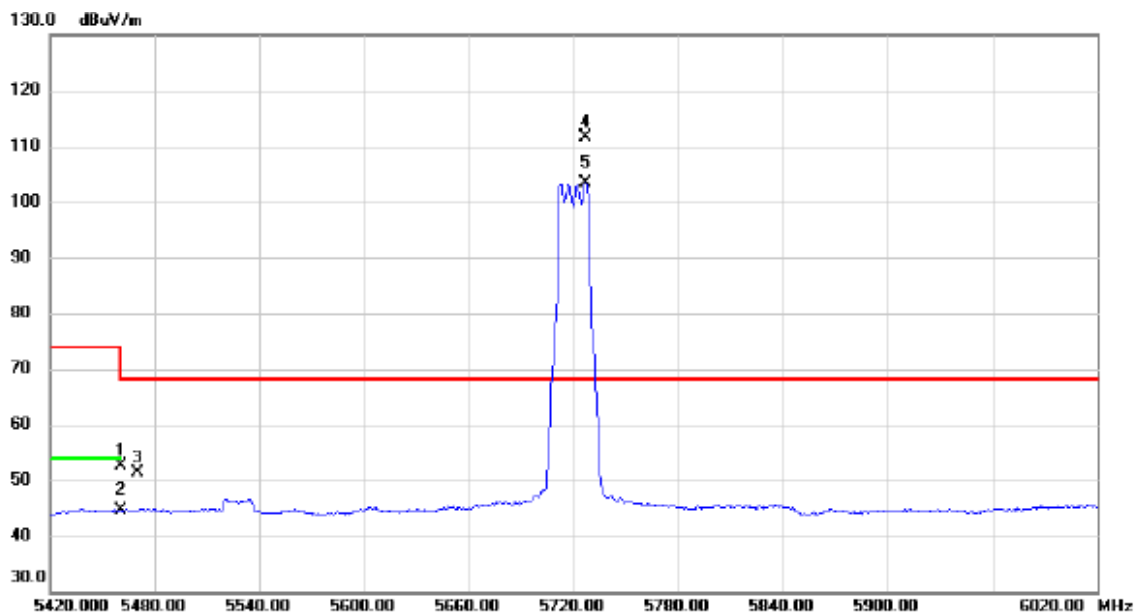


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	37.28	15.34	52.62	74.00	-21.38	peak	
2		5460.000	29.22	15.34	44.56	54.00	-9.44	AVG	
3		5470.000	35.91	15.37	51.28	68.20	-16.92	peak	
4	*	5726.900	95.48	16.24	111.72	68.20	43.52	peak	No Limit
5	X	5727.200	87.18	16.24	103.42	68.20	35.22	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5720 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

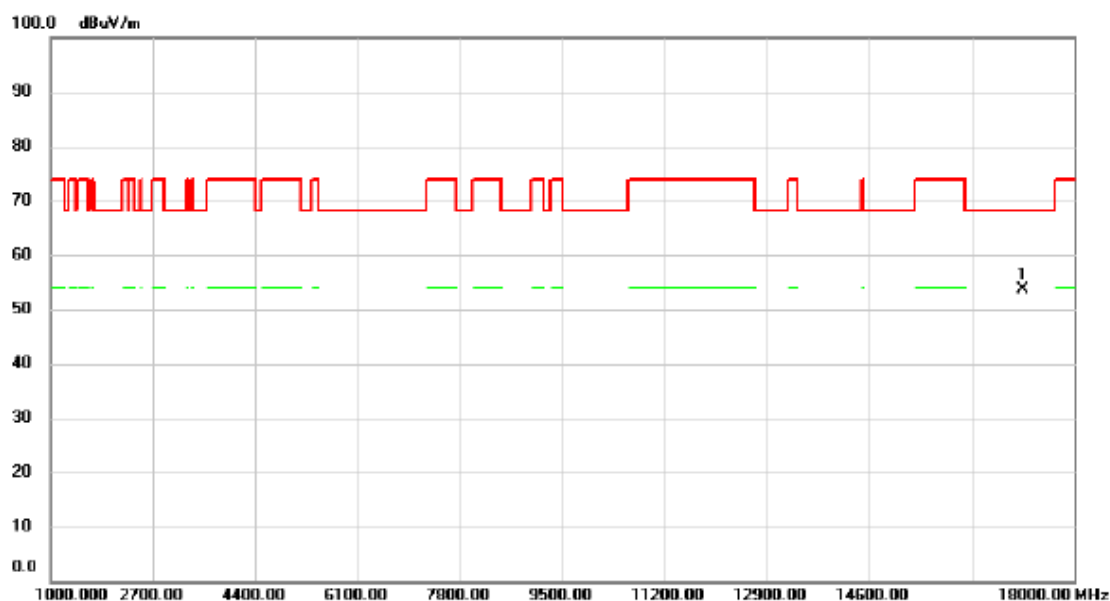


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17148.450	38.59	14.93	53.52	68.20	-14.68	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5720 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

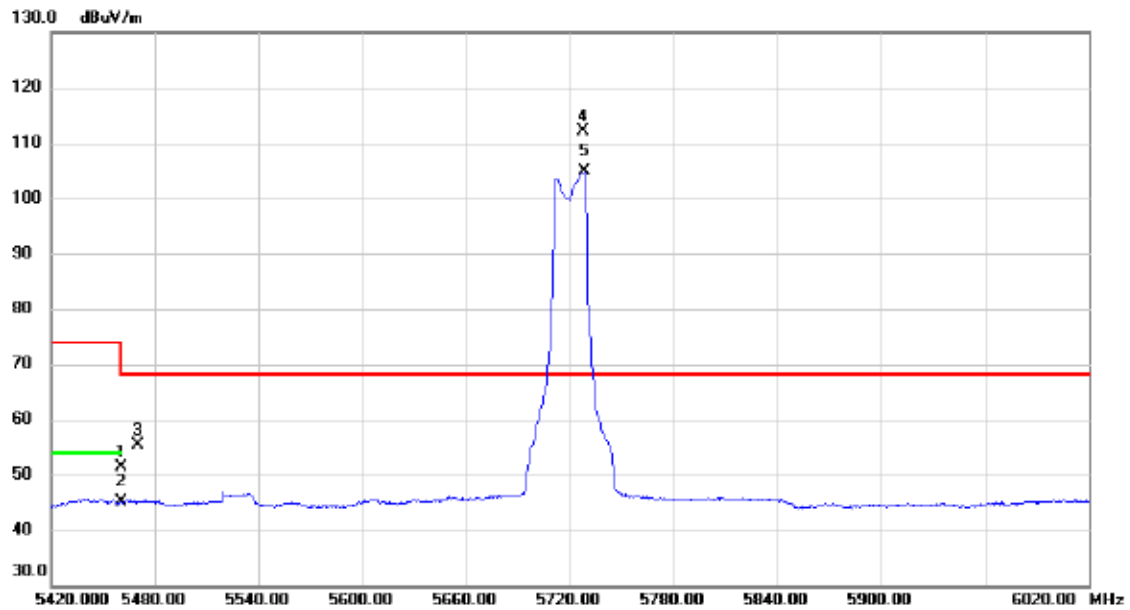


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	35.95	15.34	51.29	74.00	-22.71	peak	
2		5460.000	29.74	15.34	45.08	54.00	-8.92	AVG	
3		5470.000	40.03	15.37	55.40	68.20	-12.80	peak	
4	*	5727.800	95.92	16.24	112.16	68.20	43.96	peak	No Limit
5	X	5728.100	88.58	16.24	104.82	68.20	36.62	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5720 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

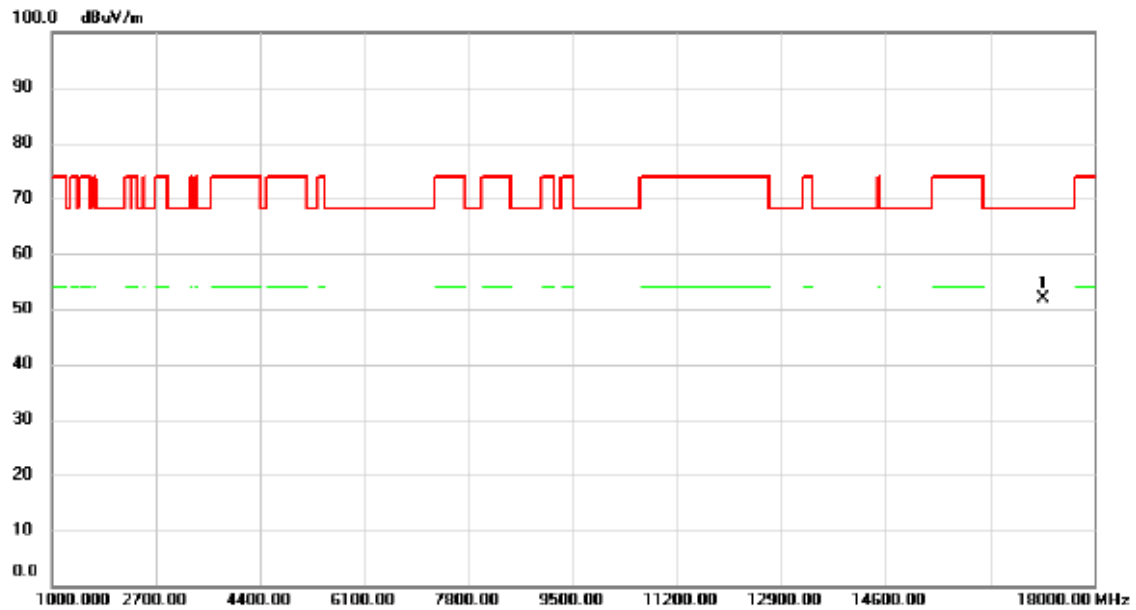


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	17176.025	37.02	14.98	52.00	68.20	-16.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5710 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

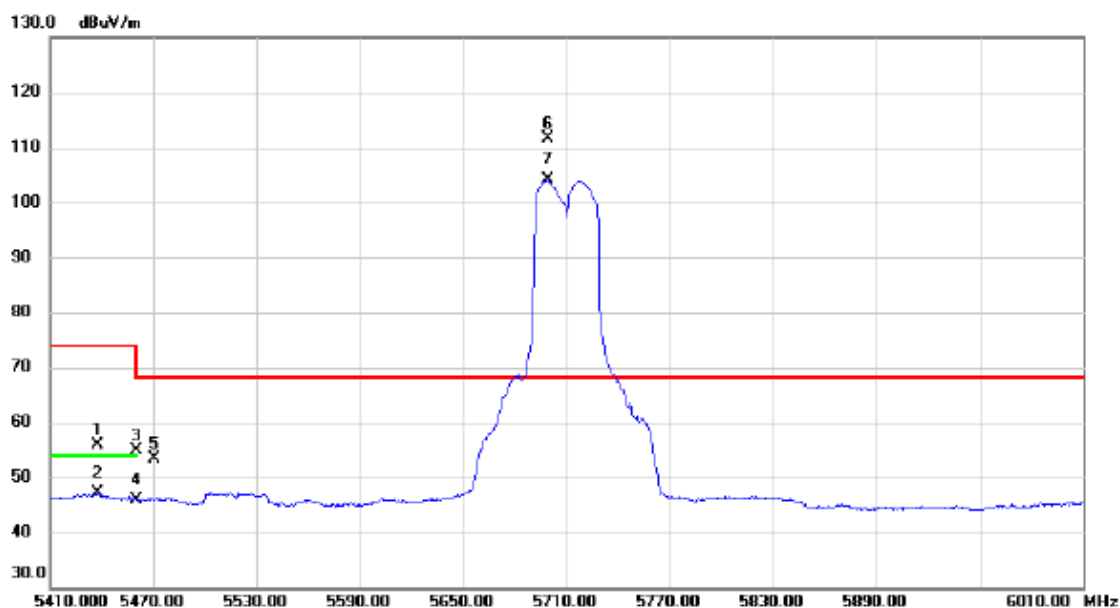


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5437.600	40.51	15.28	55.79	74.00	-18.21	peak	
2		5437.600	31.78	15.28	47.06	54.00	-6.94	AVG	
3		5460.000	39.56	15.34	54.90	74.00	-19.10	peak	
4		5460.000	30.59	15.34	45.93	54.00	-8.07	AVG	
5		5470.000	38.10	15.37	53.47	68.20	-14.73	peak	
6	*	5698.900	95.62	16.13	111.75	68.20	43.55	peak	No Limit
7	X	5699.200	88.07	16.14	104.21	68.20	36.01	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5710 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

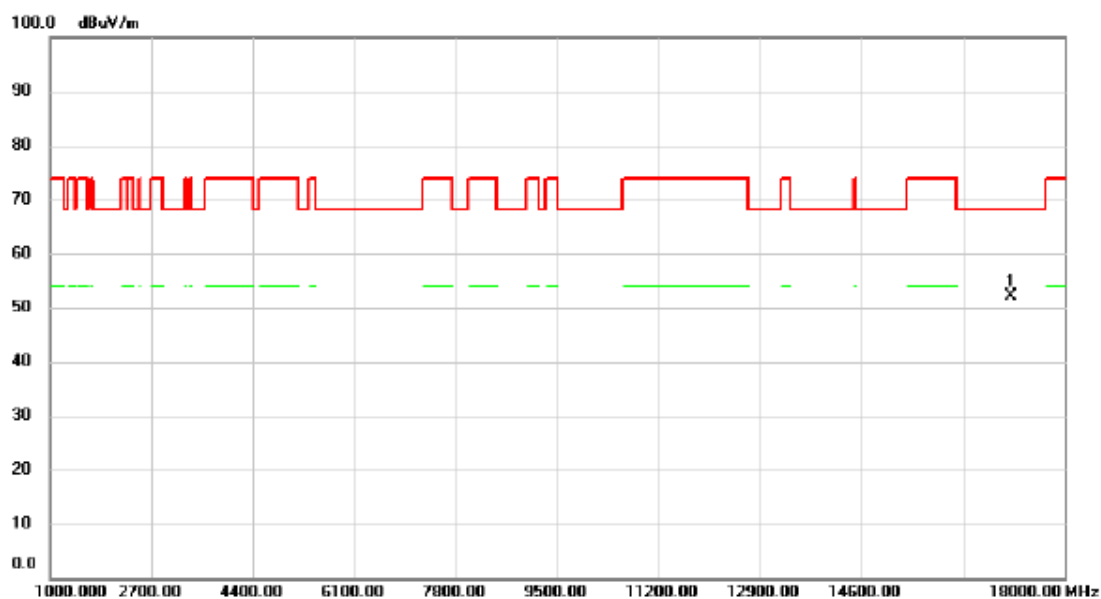


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17098.350	37.23	14.83	52.06	68.20	-16.14	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5690 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

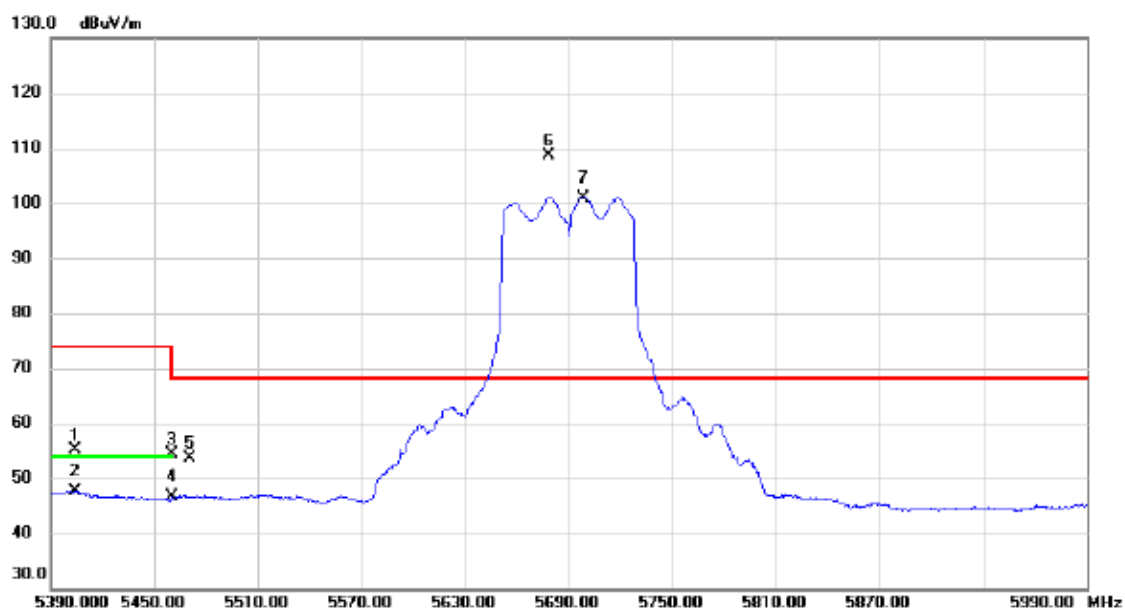


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5404.100	39.95	15.17	55.12	74.00	-18.88	peak	
2		5404.100	32.58	15.17	47.75	54.00	-6.25	AVG	
3		5460.000	39.13	15.34	54.47	74.00	-19.53	peak	
4		5460.000	31.20	15.34	46.54	54.00	-7.46	AVG	
5		5470.000	38.26	15.37	53.63	68.20	-14.57	peak	
6	*	5678.600	92.46	16.07	108.53	68.20	40.33	peak	No Limit
7	X	5698.400	84.86	16.13	100.99	68.20	32.79	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5690 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

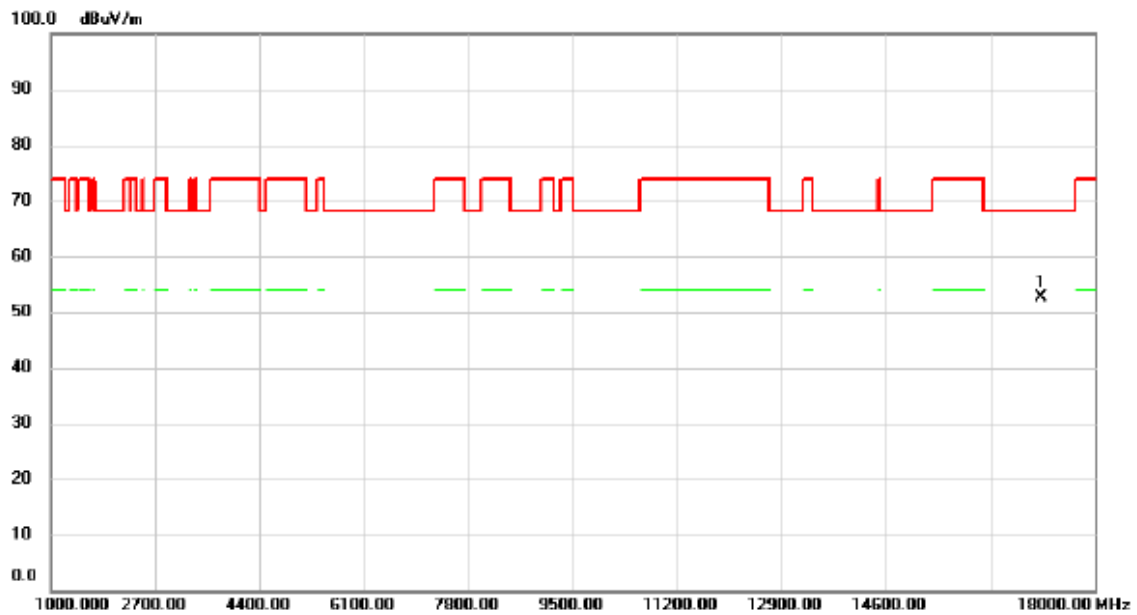


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	17133.500	37.74	14.91	52.65	68.20	-15.55	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5720 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

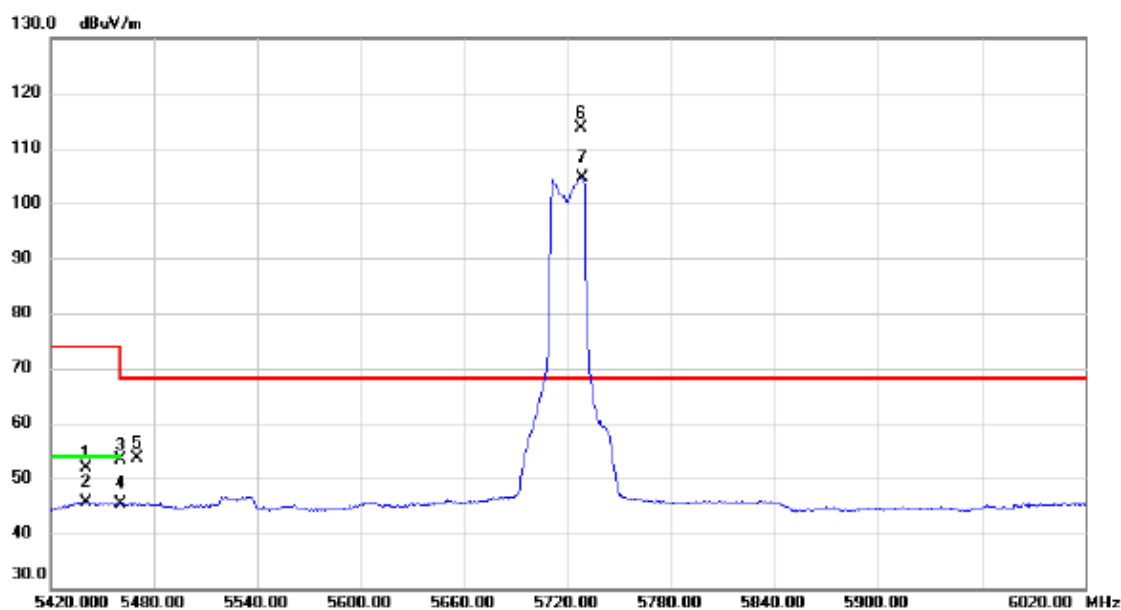


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5440.100	36.57	15.28	51.85	74.00	-22.15	peak	
2		5440.100	30.46	15.28	45.74	54.00	-8.26	AVG	
3		5460.000	37.93	15.34	53.27	74.00	-20.73	peak	
4		5460.000	29.93	15.34	45.27	54.00	-8.73	AVG	
5		5470.000	38.19	15.37	53.56	68.20	-14.64	peak	
6	*	5727.500	97.40	16.24	113.64	68.20	45.44	peak	No Limit
7	X	5728.700	88.45	16.24	104.69	68.20	36.49	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5720 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

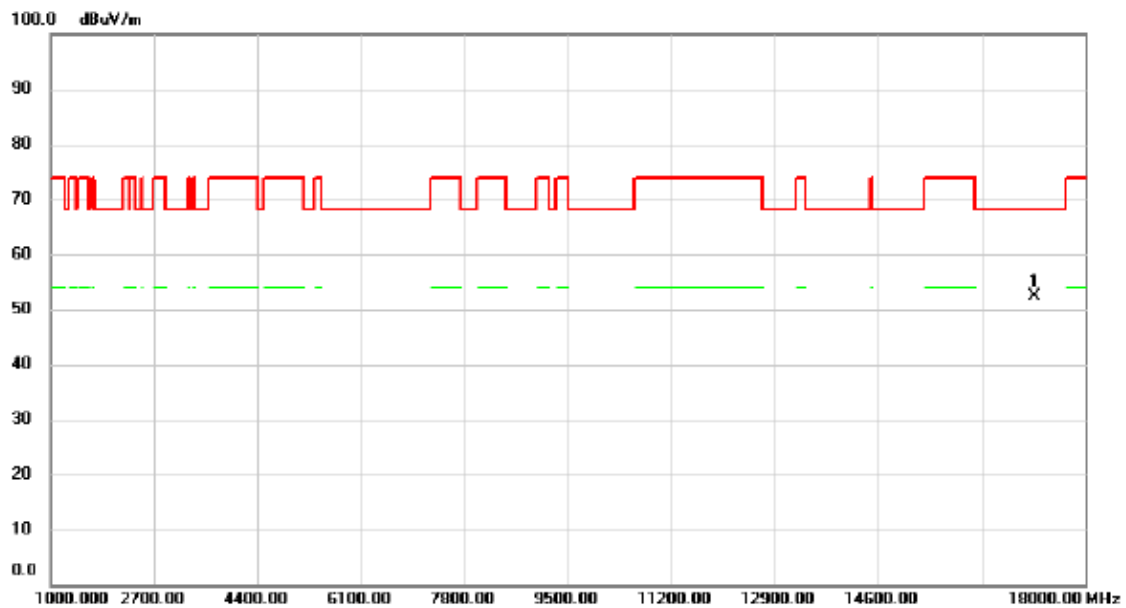


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	17163.750	37.44	14.95	52.39	68.20	-15.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5710 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

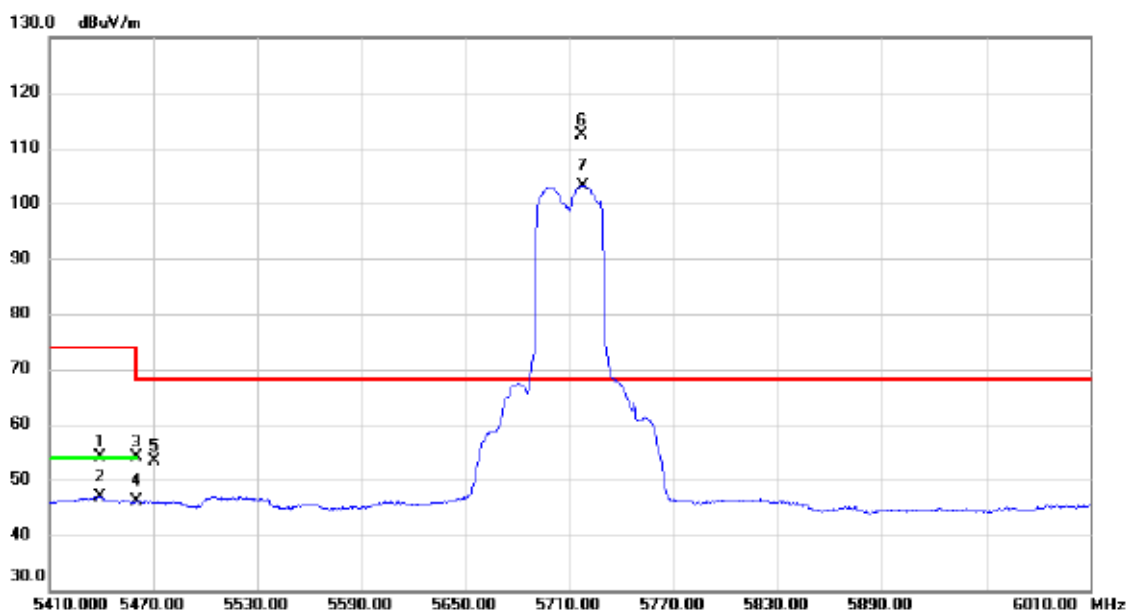


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5439.100	38.83	15.28	54.11	74.00	-19.89	peak	
2		5439.100	31.66	15.28	46.94	54.00	-7.06	AVG	
3		5460.000	38.82	15.34	54.16	74.00	-19.84	peak	
4		5460.000	30.70	15.34	46.04	54.00	-7.96	AVG	
5		5470.000	38.00	15.37	53.37	68.20	-14.83	peak	
6 *		5716.900	96.10	16.20	112.30	68.20	44.10	peak	No Limit
7 X		5717.500	86.98	16.20	103.18	68.20	34.98	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5710 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

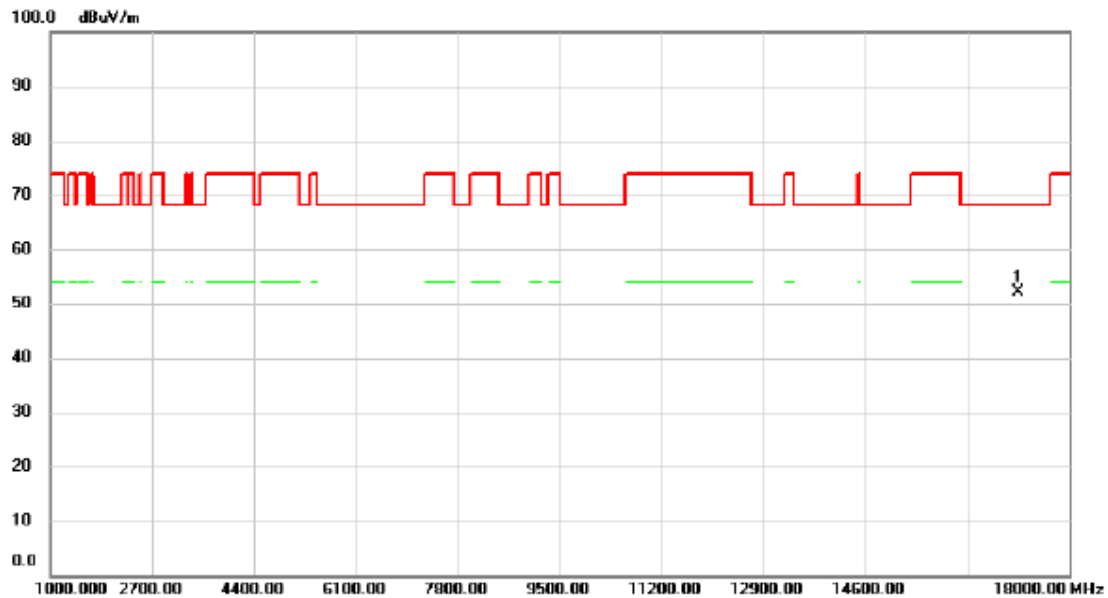


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17152.450	37.27	14.94	52.21	68.20	-15.99	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5690 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

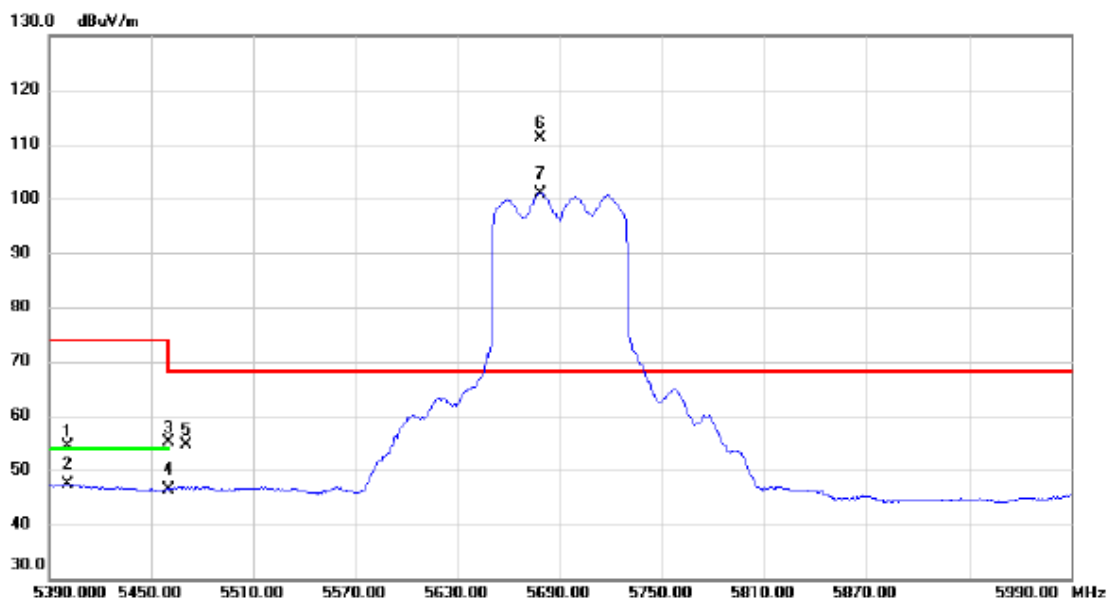


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5400.500	39.29	15.17	54.46	74.00	-19.54	peak	
2		5400.500	32.24	15.17	47.41	54.00	-6.59	AVG	
3		5460.000	39.74	15.34	55.08	74.00	-18.92	peak	
4		5460.000	31.06	15.34	46.40	54.00	-7.60	AVG	
5		5470.000	39.36	15.37	54.73	68.20	-13.47	peak	
6 *		5678.300	95.18	16.06	111.24	68.20	43.04	peak	No Limit
7 X		5678.300	84.78	16.06	100.84	68.20	32.64	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5690 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

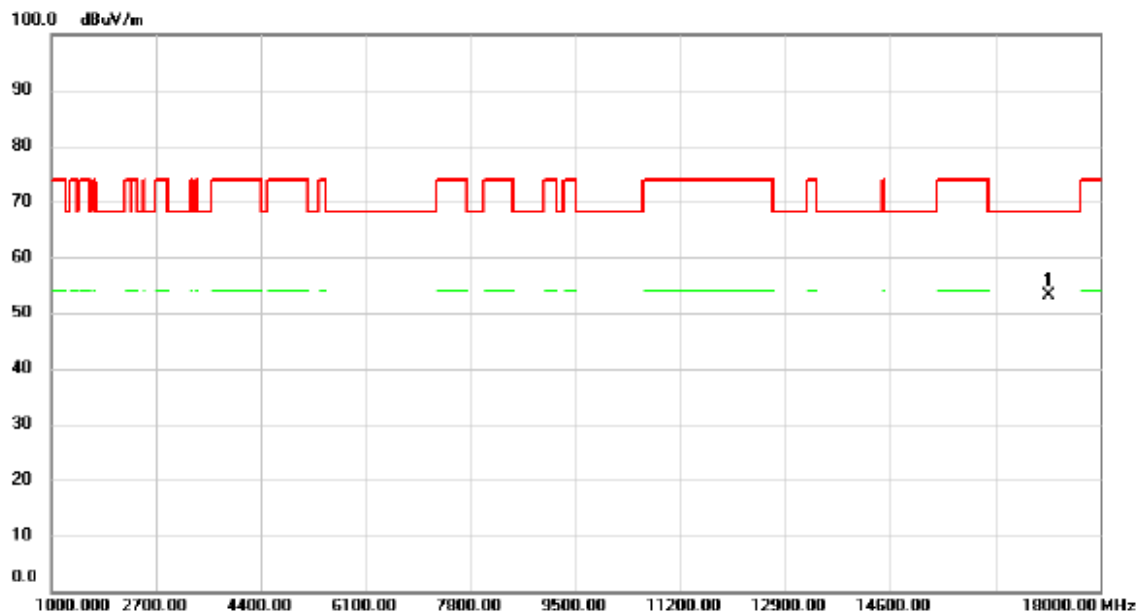


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17166.600	38.25	14.97	53.22	68.20	-14.98	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT240) Mode 5610 MHz	Polarization	Horizontal
-----------	-------------------------------------	--------------	------------

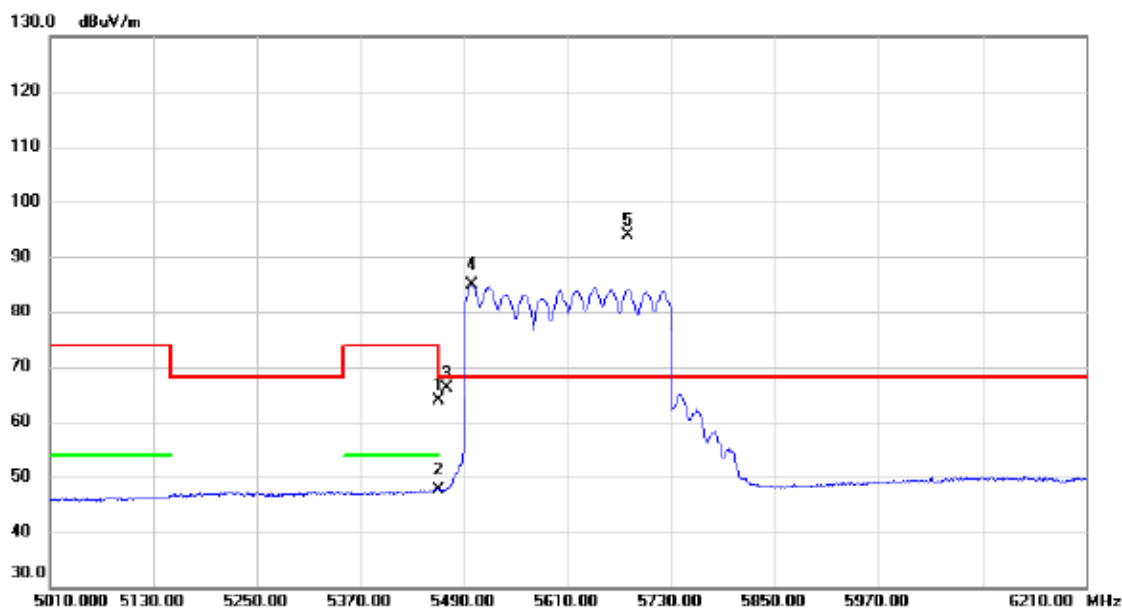


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	48.48	15.34	63.82	74.00	-10.18	peak	
2		5460.000	32.34	15.34	47.68	54.00	-6.32	AVG	
3		5470.000	50.66	15.37	66.03	68.20	-2.17	peak	
4	X	5498.400	69.35	15.46	84.81	68.20	16.61	AVG	No Limit
5	*	5679.600	77.91	16.06	93.97	68.20	25.77	peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT240) Mode 5610 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

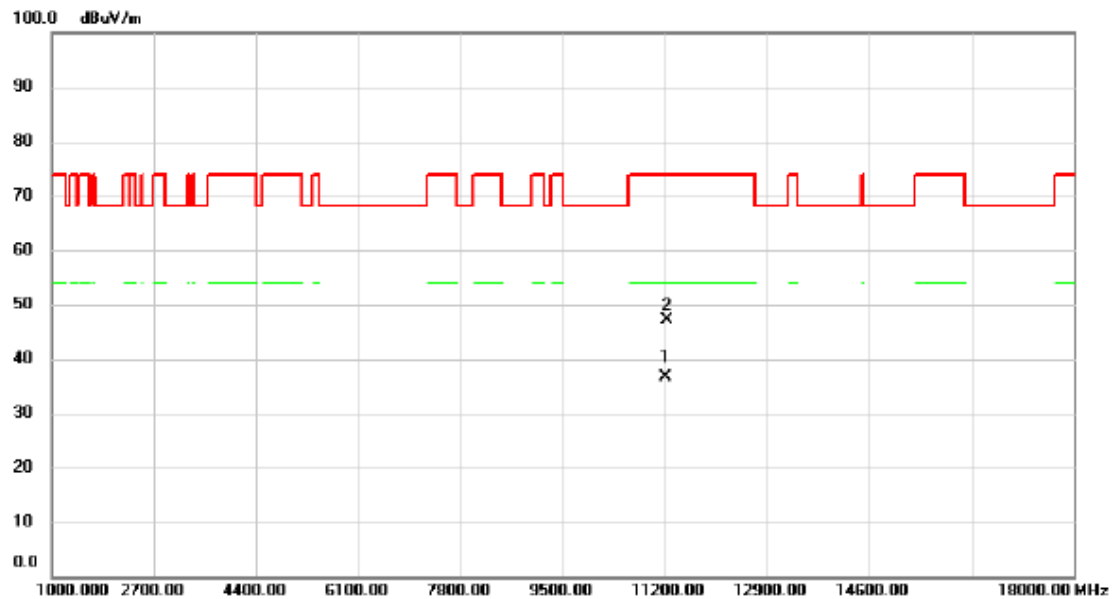


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11220.060	24.48	12.04	36.52	54.00	-17.48	AVG	
2		11225.980	35.02	12.05	47.07	74.00	-26.93	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

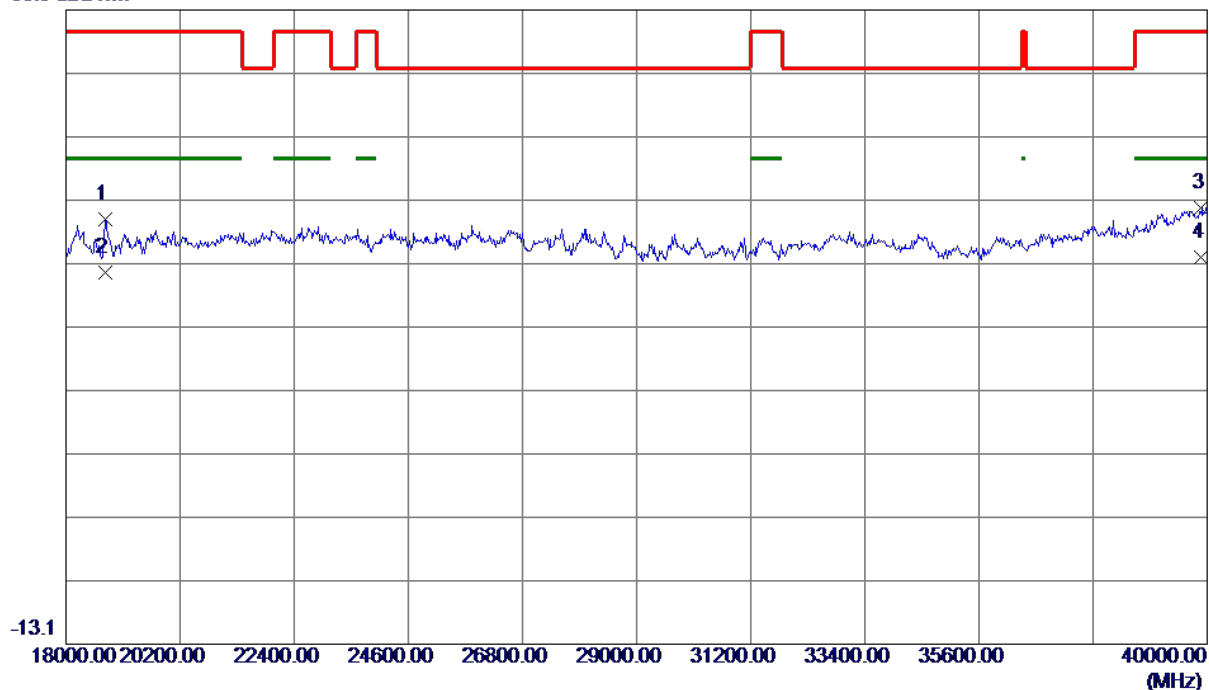

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	18748.0000	51.44	2.37	53.81	83.50	-29.69	Peak	
2	18748.0000	43.21	2.37	45.58	63.50	-17.92	AVG	
3	39890.0000	42.35	13.33	55.68	83.50	-27.82	Peak	
4 *	39890.0000	34.59	13.33	47.92	63.50	-15.58	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

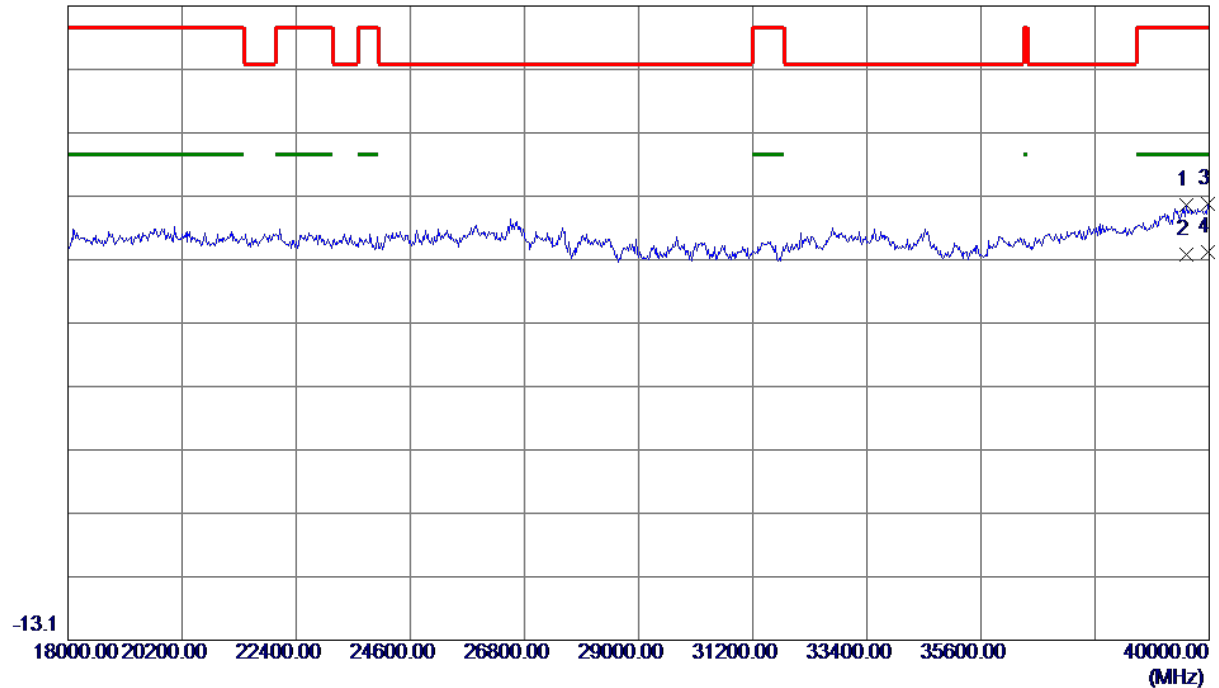


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	39560.0000	42.13	13.35	55.48	83.50	-28.02	Peak	
2	39560.0000	34.35	13.35	47.70	63.50	-15.80	AVG	
3	39978.0000	42.41	13.33	55.74	83.50	-27.76	Peak	
4 *	39978.0000	34.78	13.33	48.11	63.50	-15.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Worst case:

Test Mode	UNII-2A_TX BE(EHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

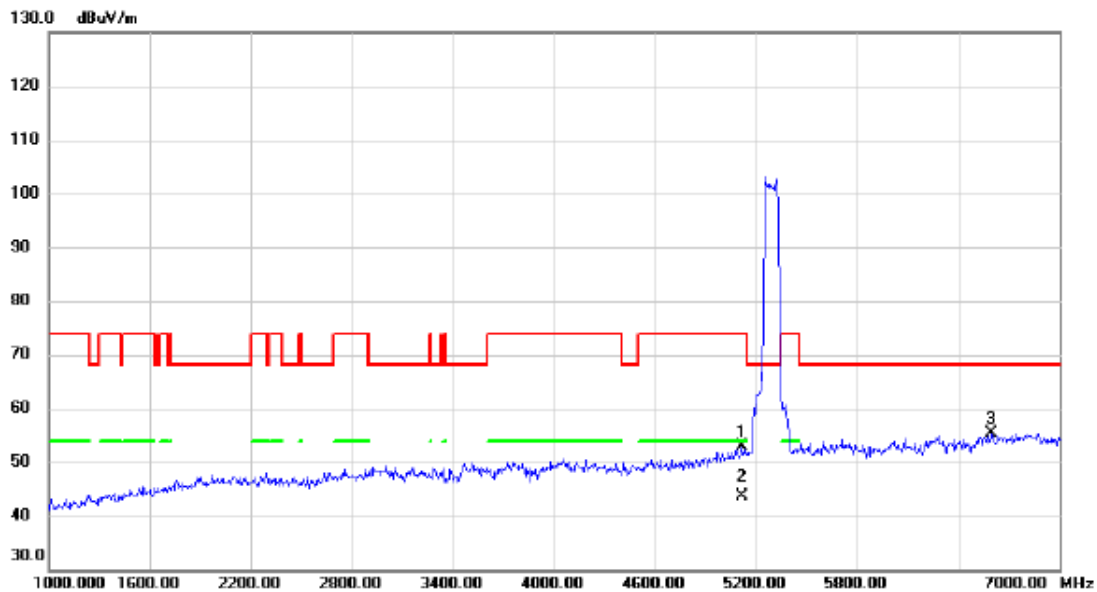


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5116.000	38.60	14.34	52.94	74.00	-21.06	peak	
2	*	5116.000	29.39	14.34	43.73	54.00	-10.27	AVG	
3		6598.000	36.41	19.05	55.46	68.20	-12.74	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

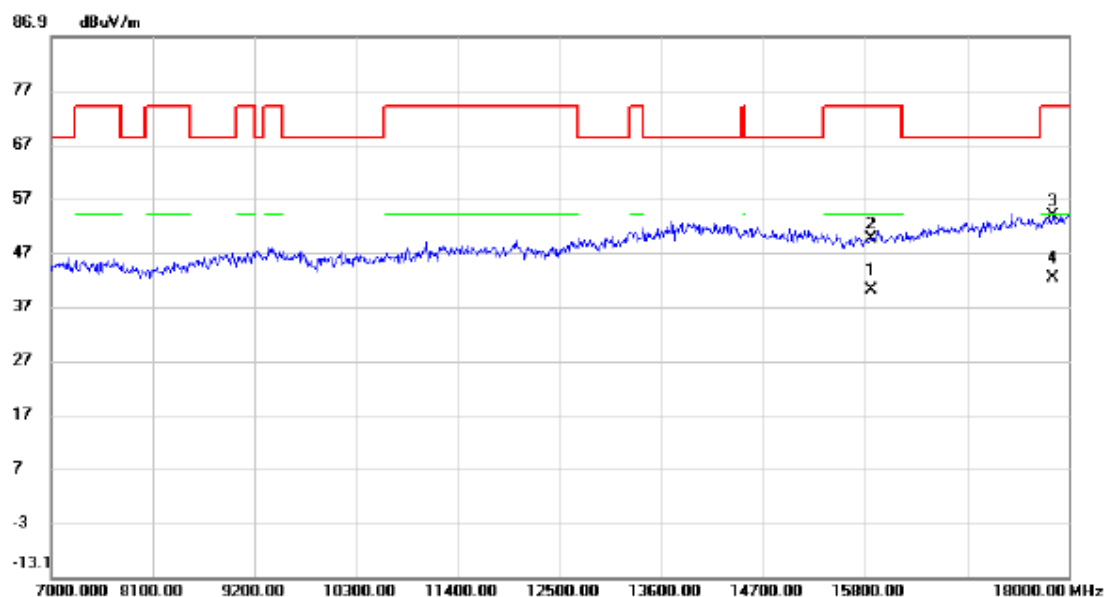

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		15864.300	27.05	12.89	39.94	54.00	-14.06	AVG	
2		15870.600	36.61	12.90	49.51	74.00	-24.49	peak	
3		17835.000	38.24	15.64	53.88	74.00	-20.12	peak	
4 *		17835.000	26.59	15.64	42.23	54.00	-11.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Omnidirectional Antenna


Test Mode	UNII-1_TX A Mode
-----------	------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	23.760	17.359
40	5200	24.000	17.427
48	5240	25.740	17.790


CH36

CH40 26 dB Bandwidth

CH48

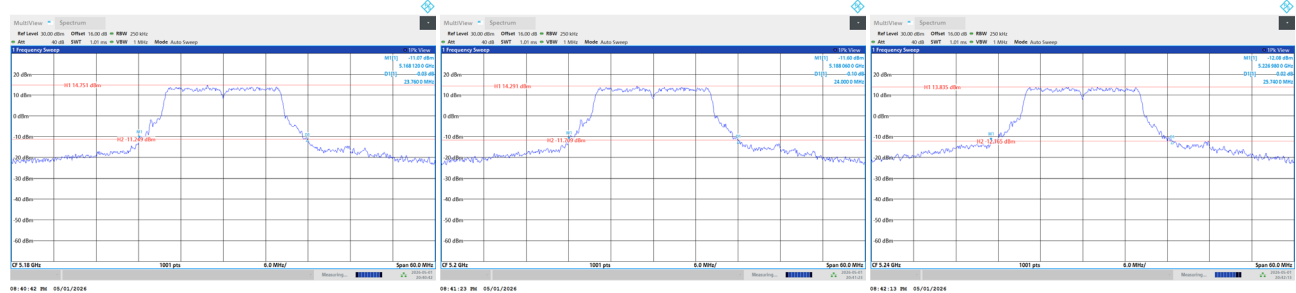

99 % Occupied Bandwidth

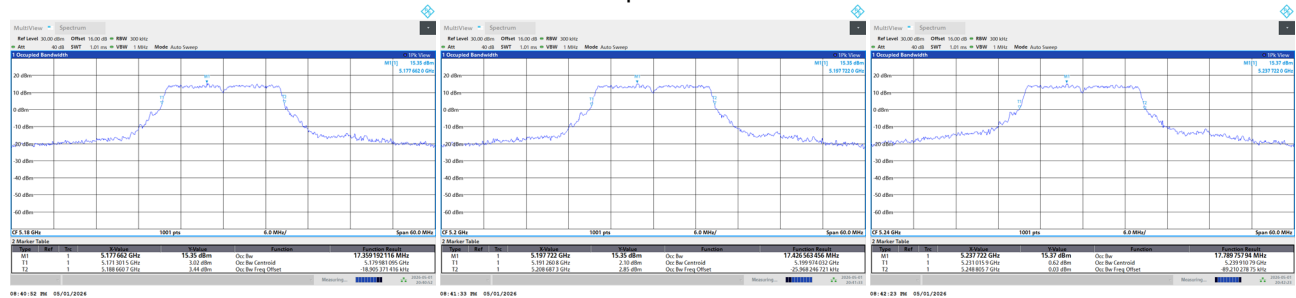


Test Mode	UNII-1_TX AC(VHT20) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	44.880	20.838
40	5200	47.460	26.856
48	5240	48.300	26.983


CH36

CH40
26 dB Bandwidth

CH48

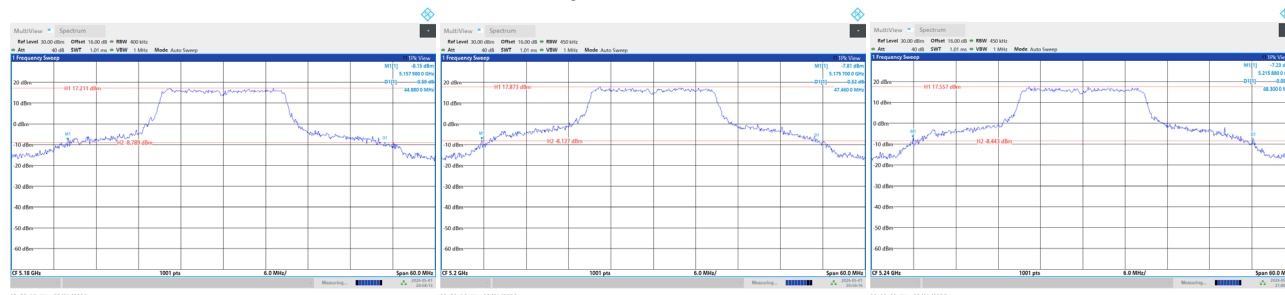


99 % Occupied Bandwidth

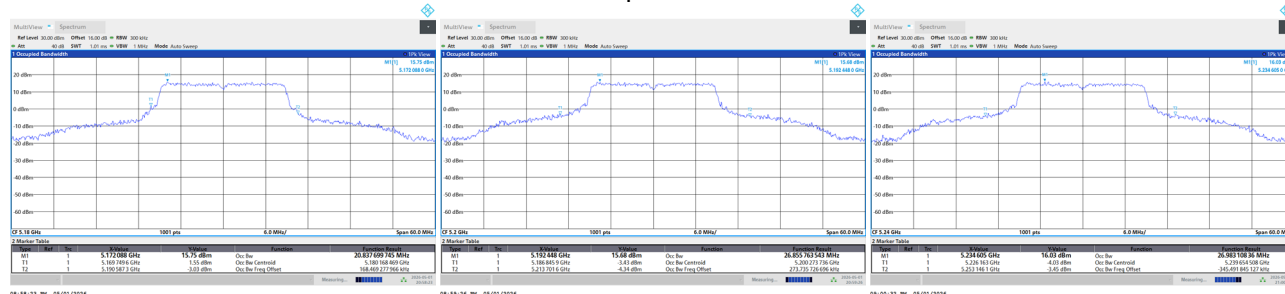


Test Mode	UNII-1_TX AC(VHT40) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	103.320	66.061
46	5230	103.800	71.184



CH38

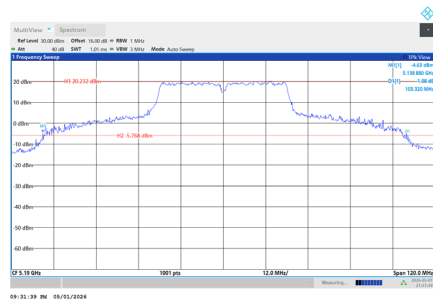

CH46
26 dB Bandwidth

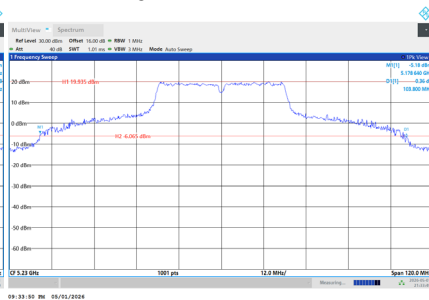


99 % Occupied Bandwidth

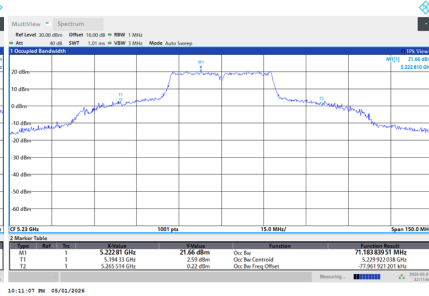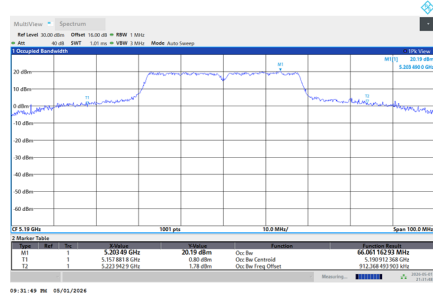


Test Mode	UNII-1_TX AC(VHT80) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	215.500	136.328

CH42 26 dB Bandwidth

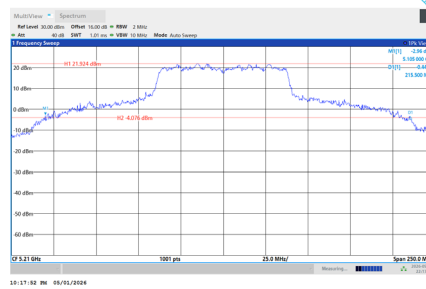

99 % Occupied Bandwidth

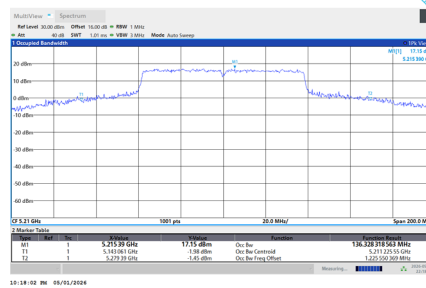


Test Mode	UNII-1_TX BE(EHT20) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	49.740	19.792
40	5200	50.220	24.669
48	5240	50.580	22.646


CH36

CH40
26 dB Bandwidth

CH48

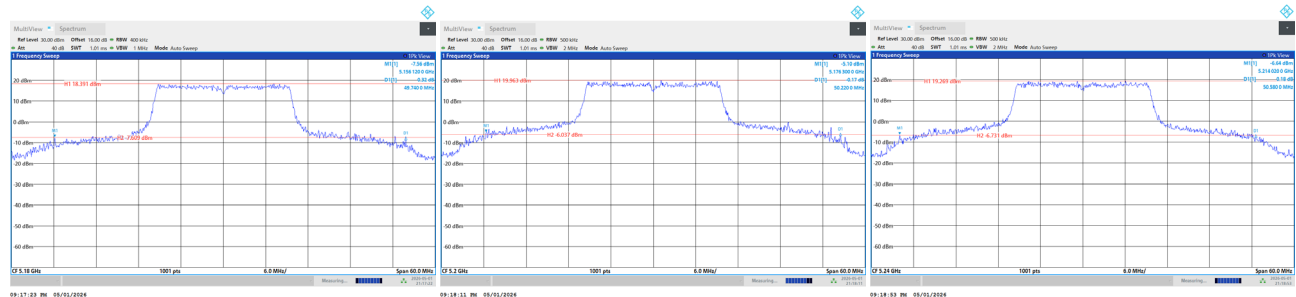

99 % Occupied Bandwidth

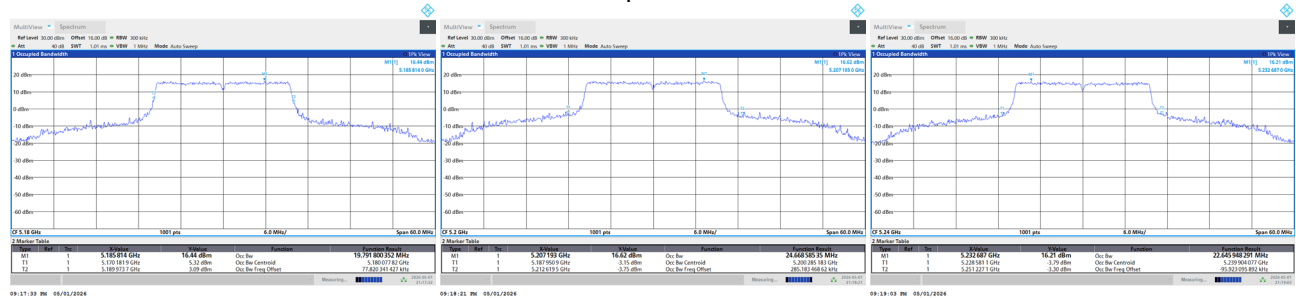


Test Mode	UNII-1_TX BE(EHT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	105.720	66.395
46	5230	106.560	72.664

CH38

CH46
26 dB Bandwidth

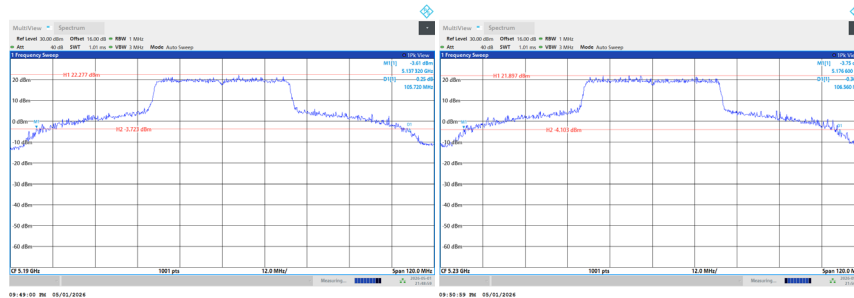


99 % Occupied Bandwidth

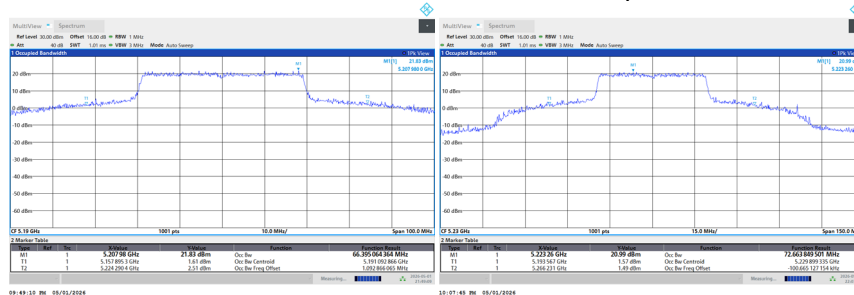


Test Mode	UNII-1_TX BE(EHT80) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	213.000	131.381

CH42 26 dB Bandwidth

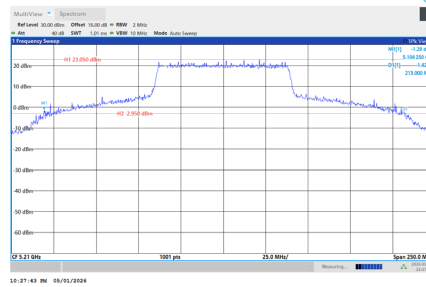

99 % Occupied Bandwidth

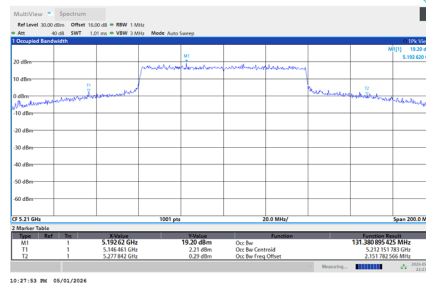


Test Mode	UNII-2A_TX A Mode
-----------	-------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	22.440	17.145
60	5300	22.860	17.124
64	5320	22.440	17.134


CH52

CH60
26 dB Bandwidth

CH64

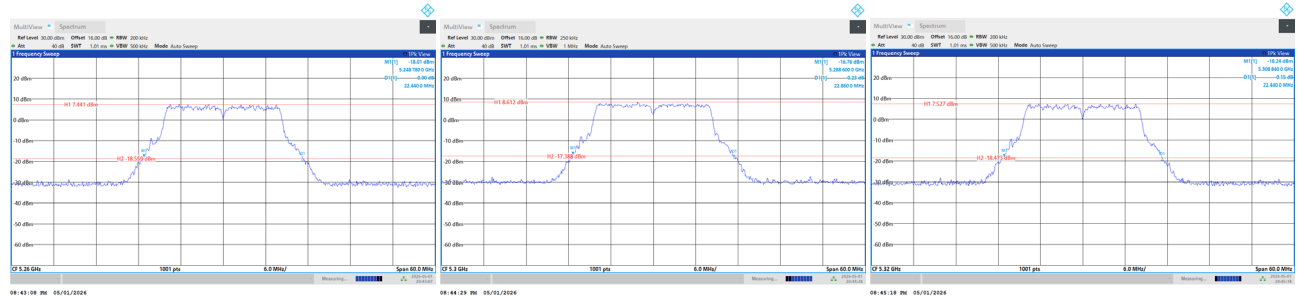

99 % Occupied Bandwidth

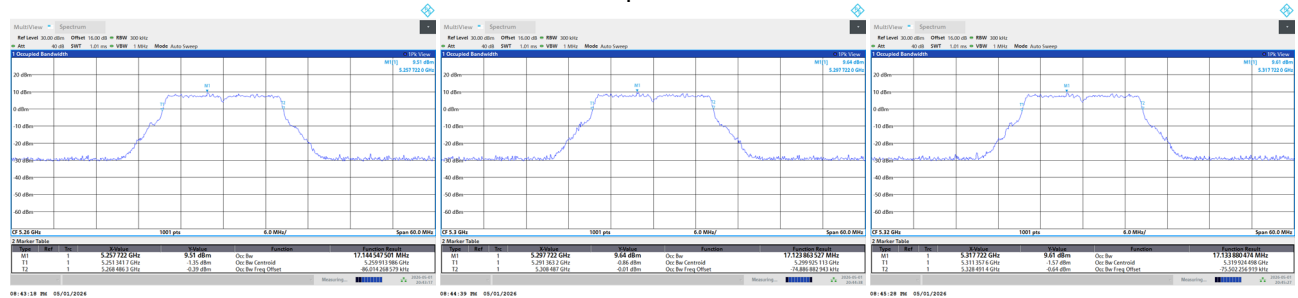


Test Mode	UNII-2A_TX AC(VHT20) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	46.320	23.403
60	5300	40.920	19.445
64	5320	25.080	18.688


CH52

CH60
26 dB Bandwidth

CH64

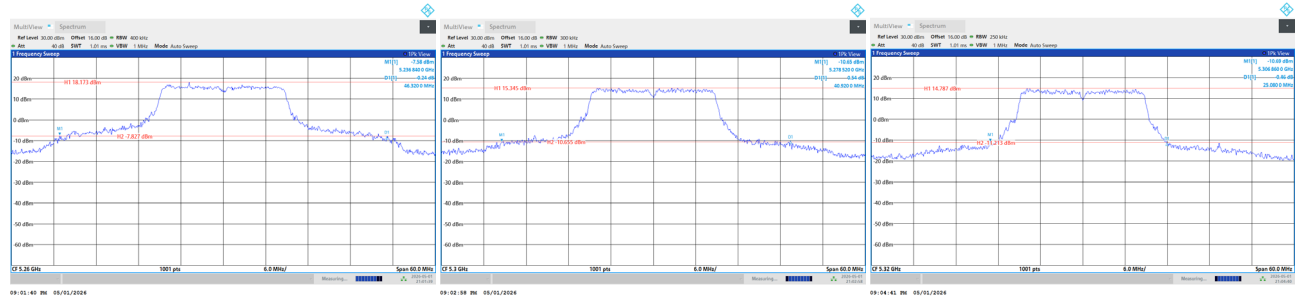

99 % Occupied Bandwidth

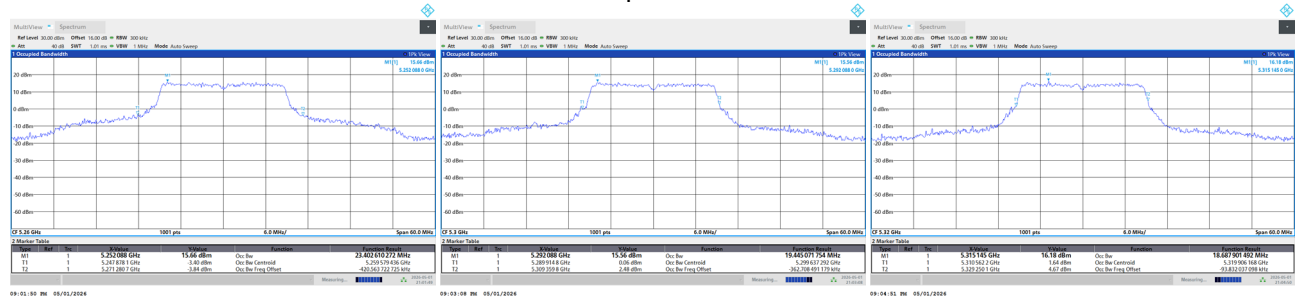


Test Mode	UNII-2A_TX AC(VHT40) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	45.900	37.699
62	5310	45.400	37.699

CH54

CH62
26 dB Bandwidth

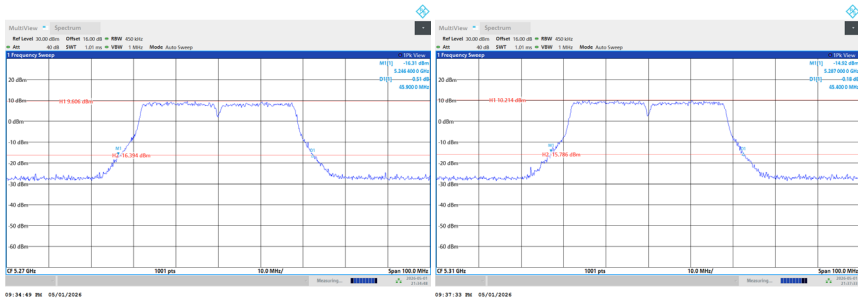


99 % Occupied Bandwidth

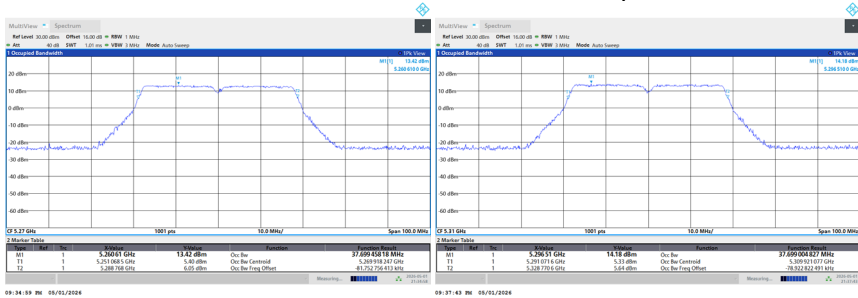


Test Mode	UNII-2A_TX AC(VHT80) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	95.600	76.804

CH58 26 dB Bandwidth

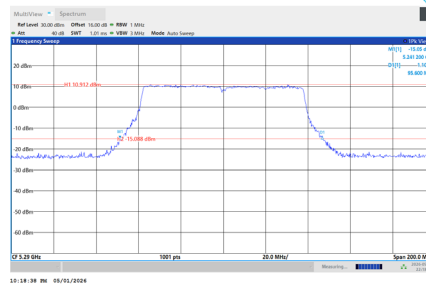

99 % Occupied Bandwidth

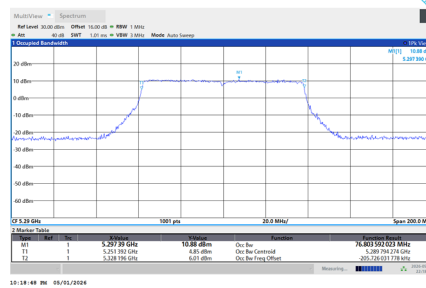


Test Mode	UNII-2A_TX BE(EHT20) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	23.160	19.199
60	5300	23.460	19.191
64	5320	22.920	19.207

CH52

CH60
26 dB Bandwidth

CH64

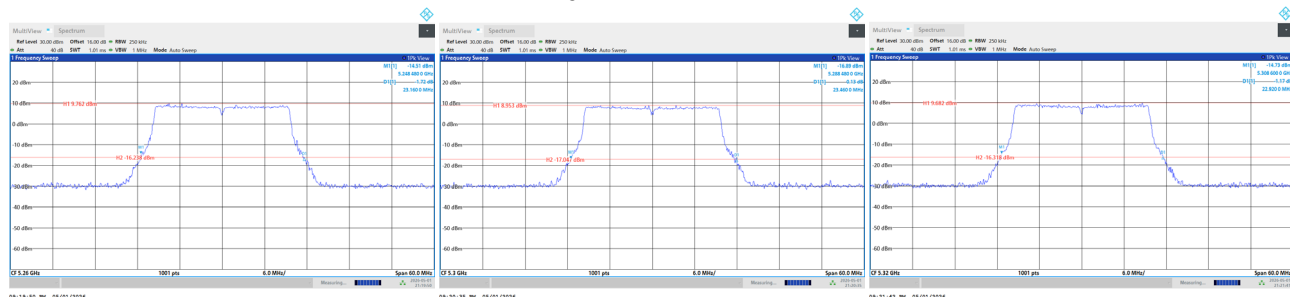

99 % Occupied Bandwidth

