



802.11be-EHT40 26 dB Bandwidth


Channel 35 (6125 MHz)

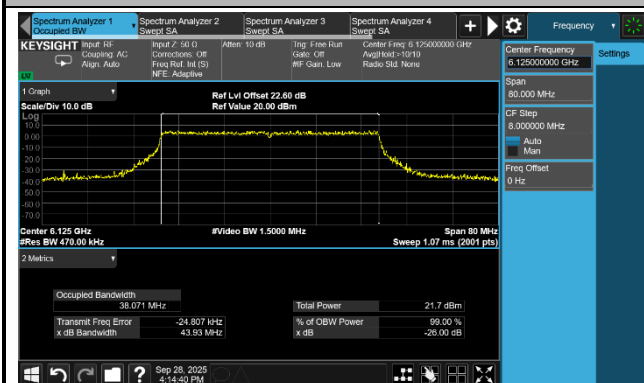


Channel 59 (6245 MHz)

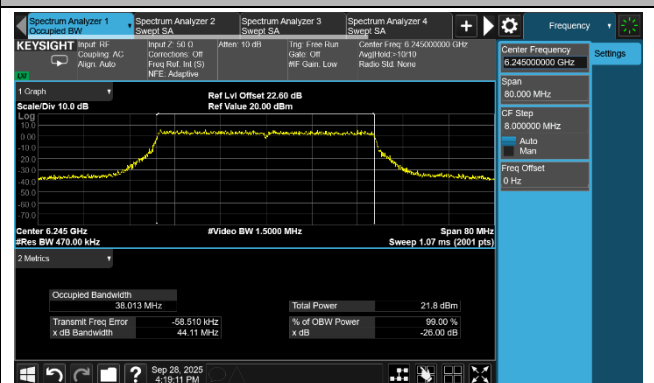


Channel 91 (6405 MHz)

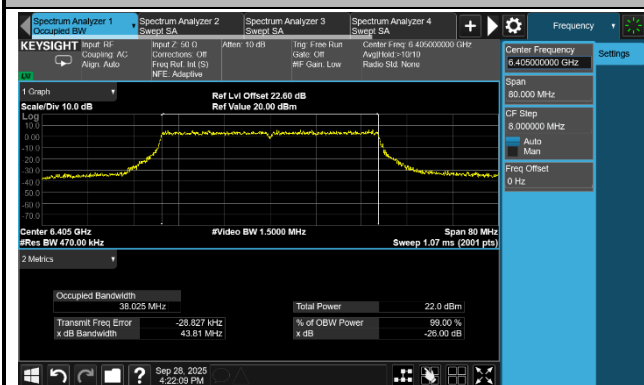


Channel 99 (6445 MHz)

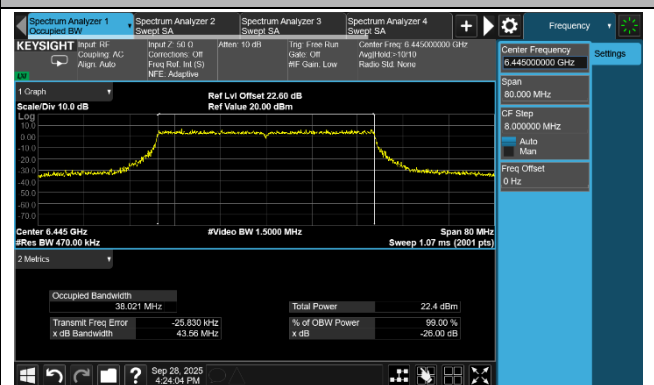

Channel 107 (6485 MHz)

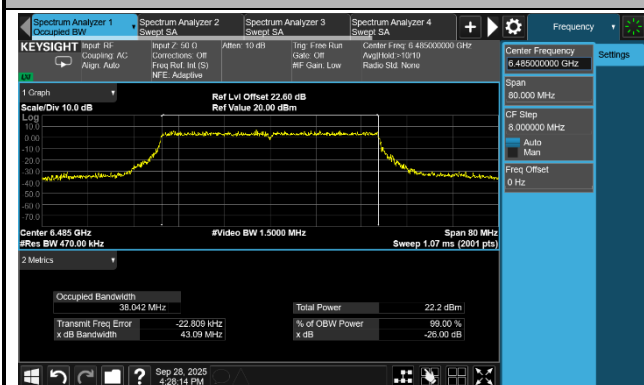


Channel 115 (6525 MHz)

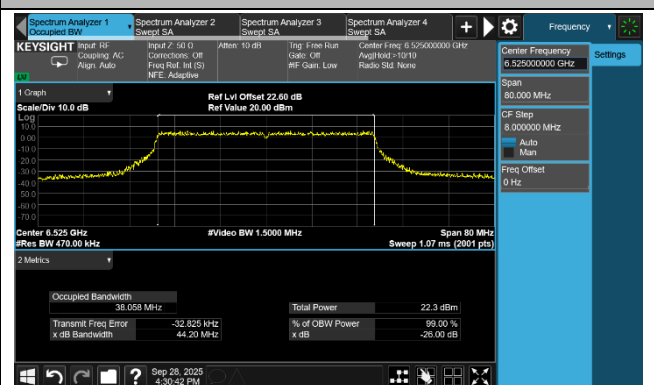


802.11be-EHT40 26 dB Bandwidth


Channel 123 (6565 MHz)

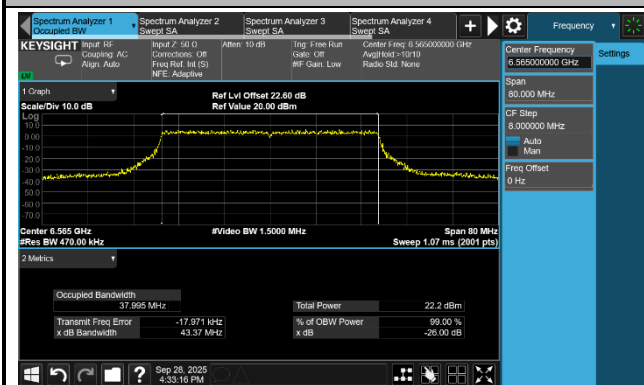


Channel 147 (6685 MHz)

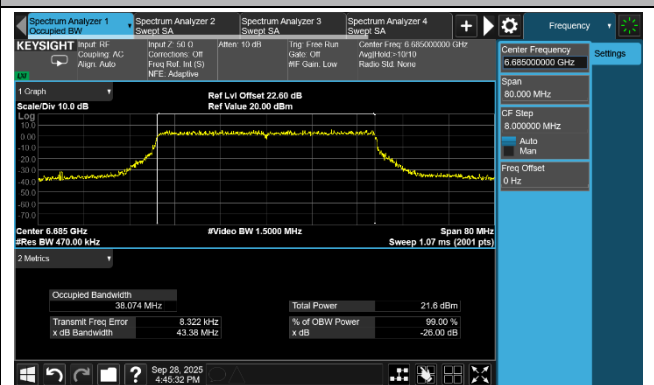


Channel 179 (6845 MHz)

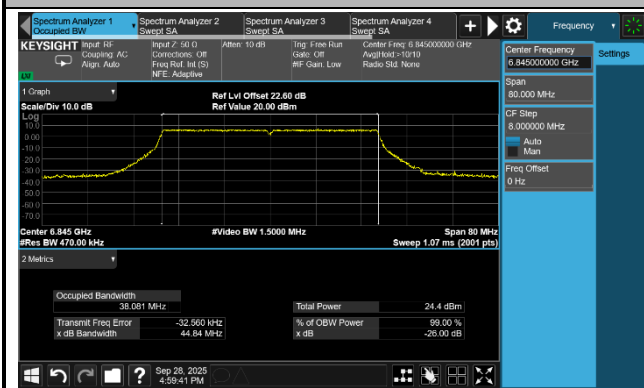


Channel 187 (6885 MHz)

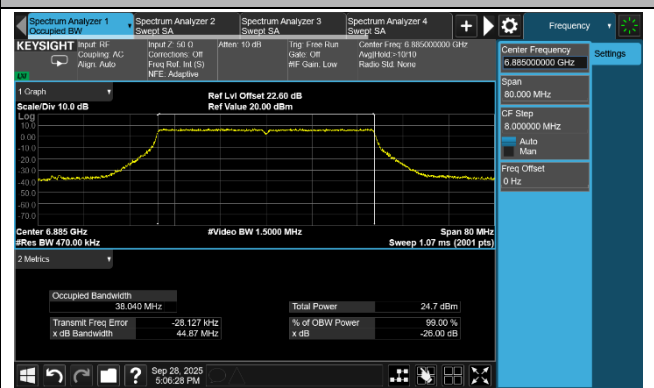


Channel 195 (6925 MHz)

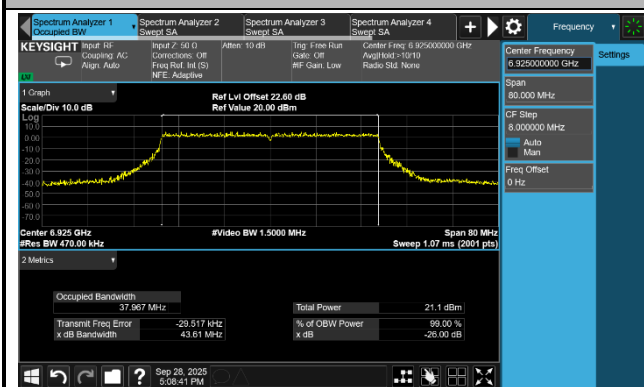


Channel 211 (7005 MHz)

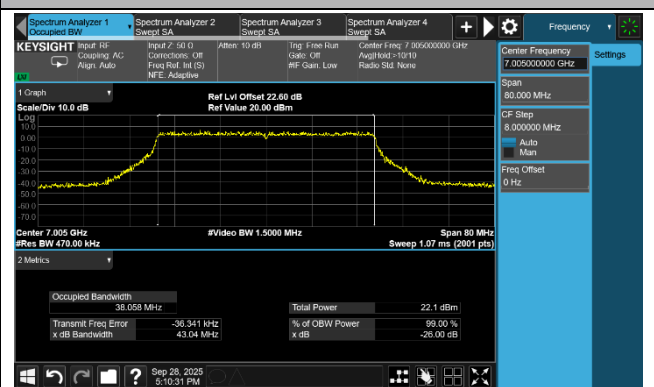

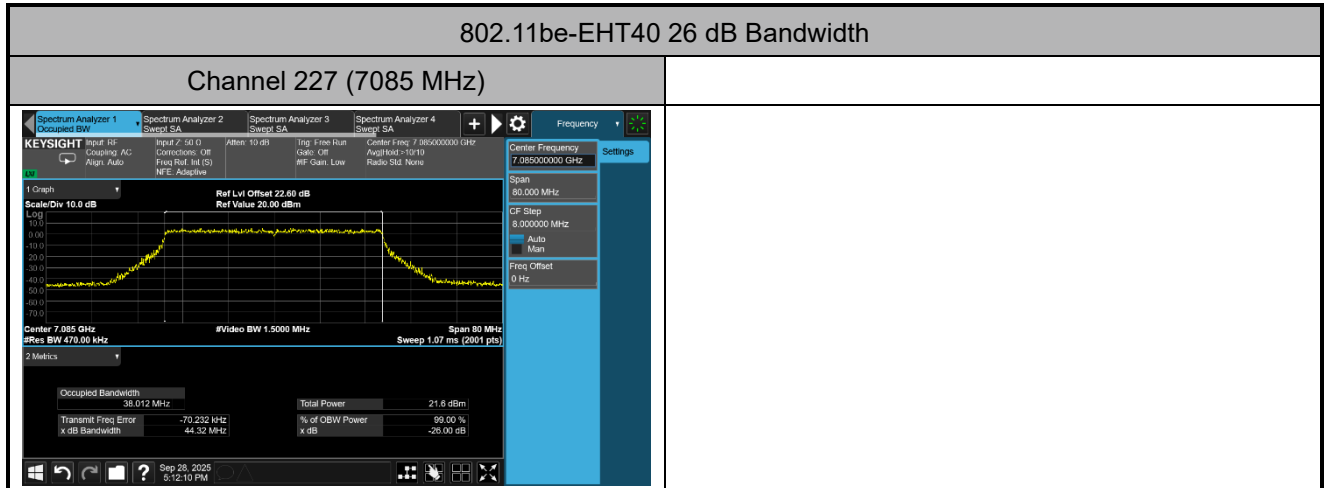


802.11be-EHT80 26 dB Bandwidth


Channel 39 (6145 MHz)

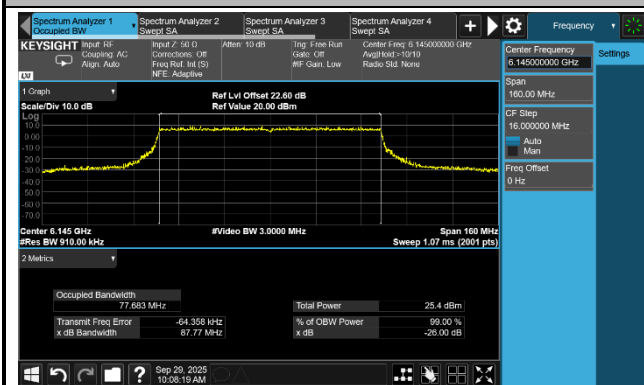


Channel 55 (6225 MHz)

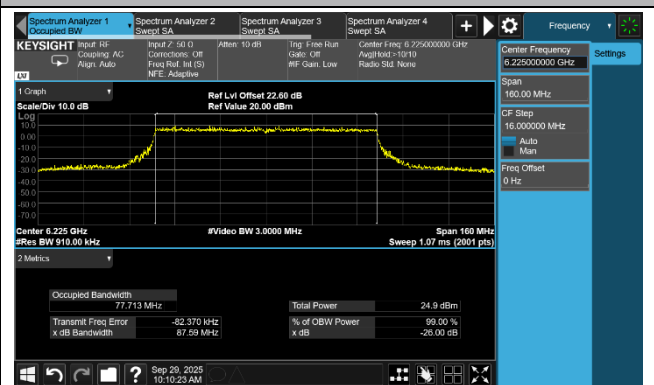


Channel 87 (6385 MHz)

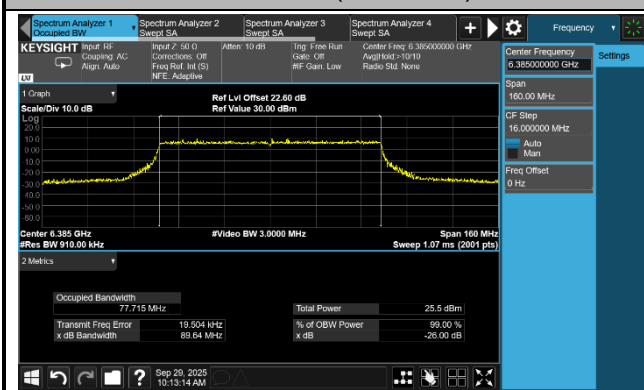


Channel 103 (6465 MHz)

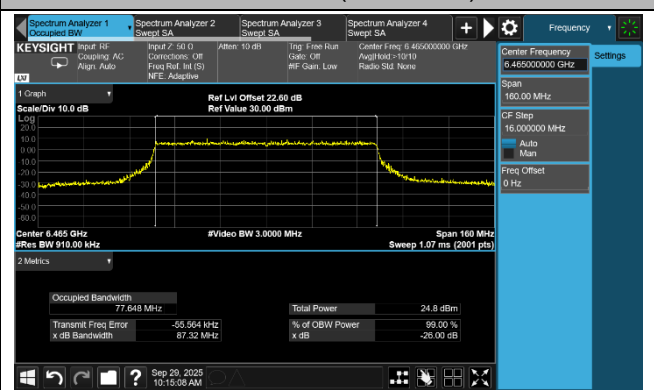

Channel 119 (6545 MHz)

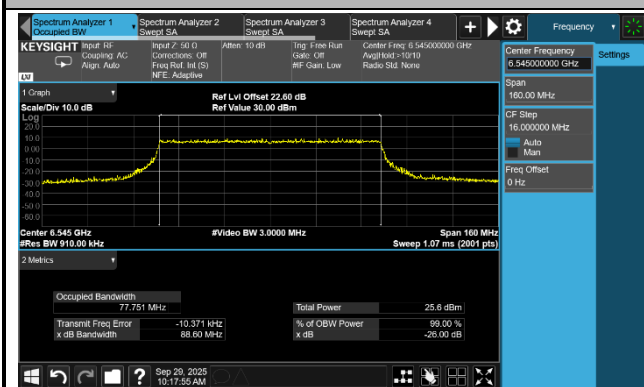


Channel 135 (6625 MHz)

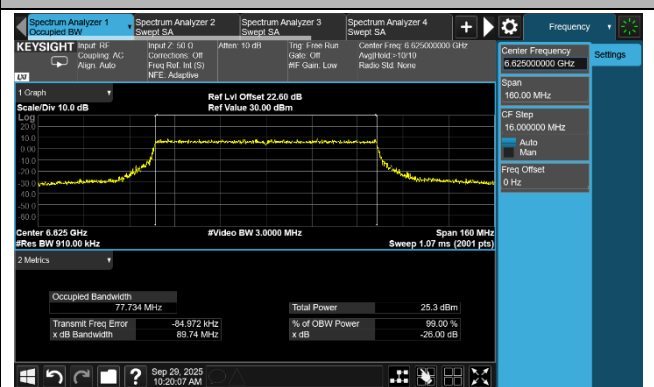


802.11be-EHT80 26 dB Bandwidth


Channel 151 (6705 MHz)

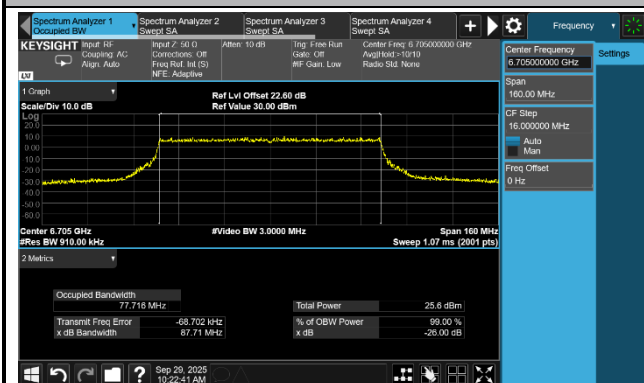


Channel 167 (6785 MHz)

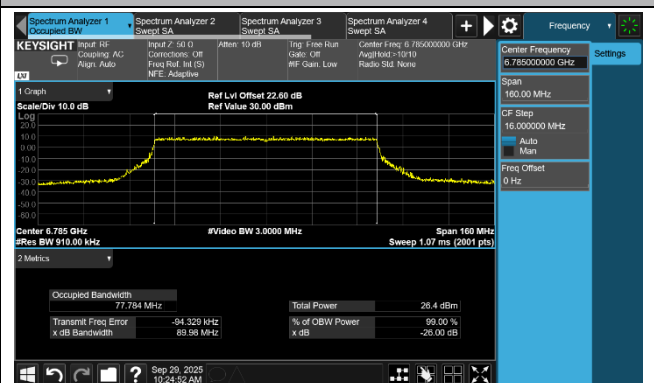


Channel 183 (6865 MHz)

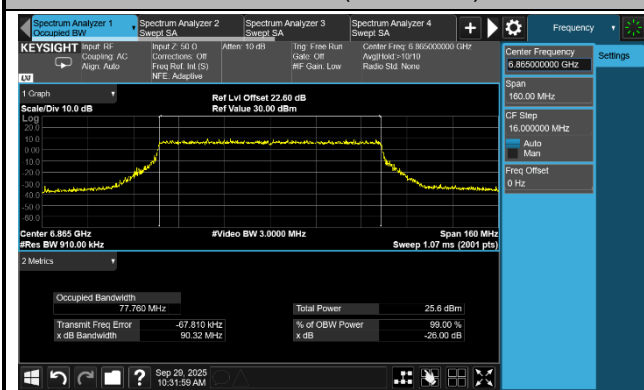

Channel 199 (6945 MHz)

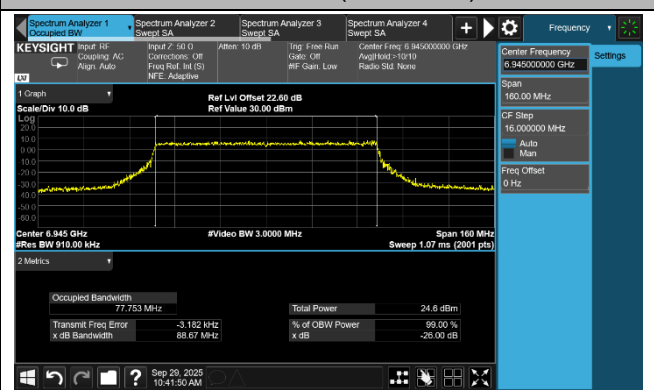


Channel 215 (7025 MHz)

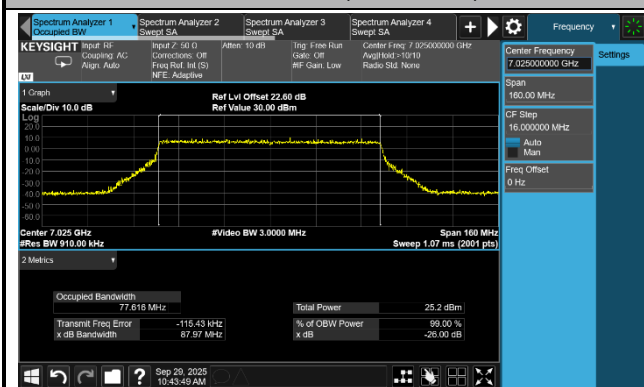


802.11be-EHT160 26 dB Bandwidth


Channel 47 (6185 MHz)

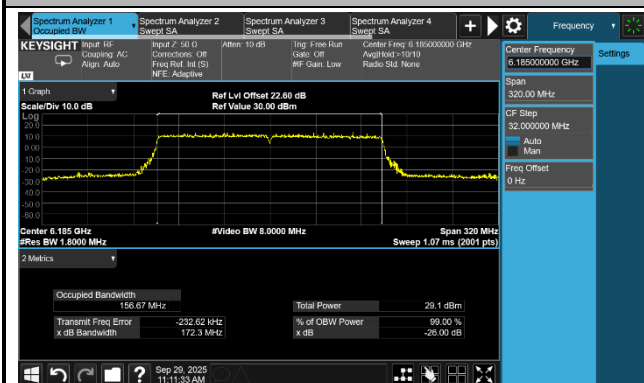


Channel 79 (6345 MHz)

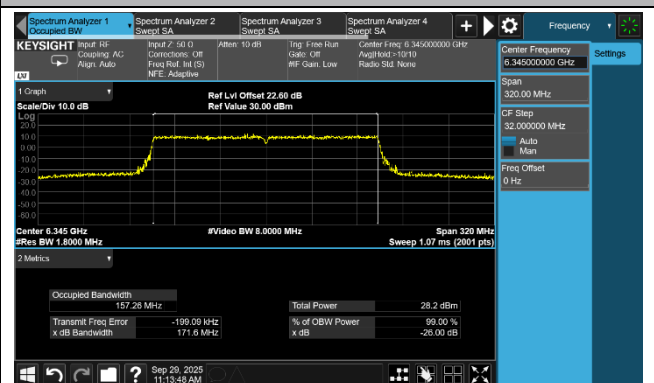


Channel 111 (6505 MHz)

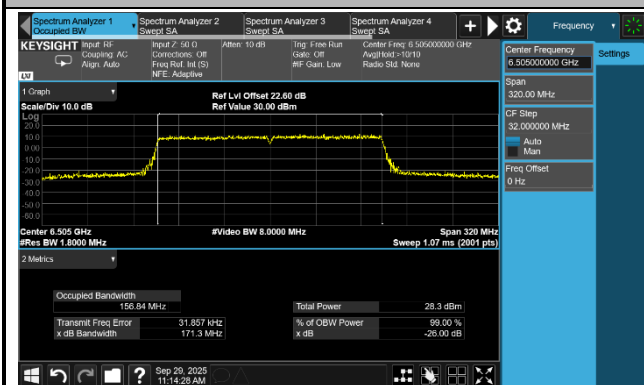


Channel 143 (6665 MHz)

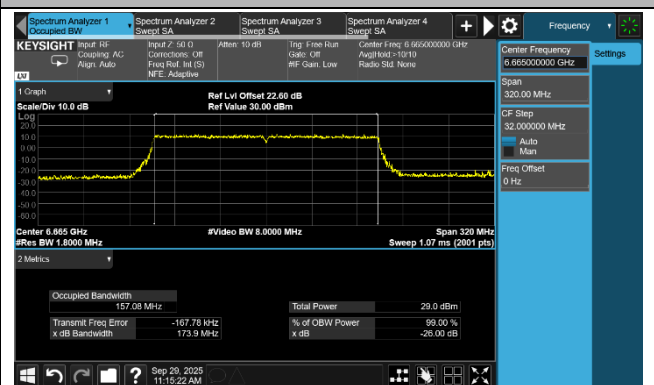

Channel 175 (6825 MHz)

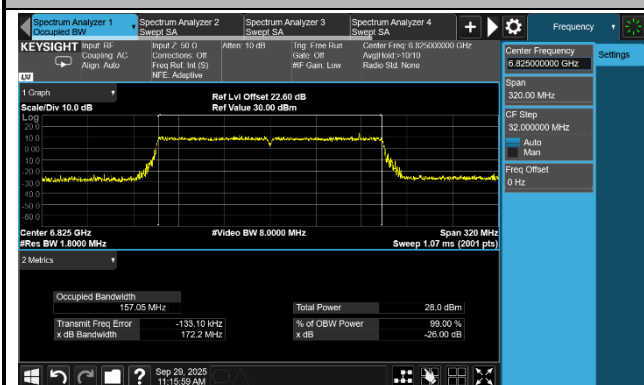


Channel 207 (6985 MHz)

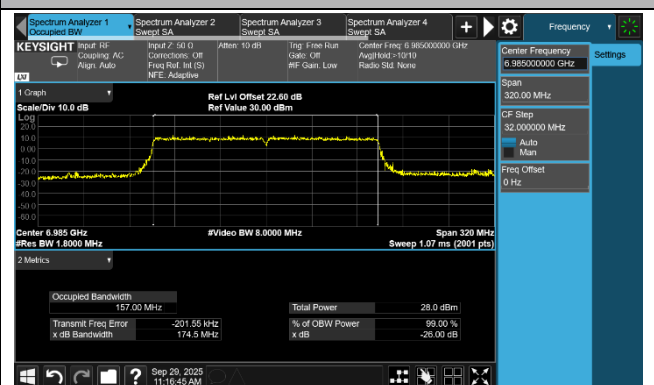


802.11be-EHT320 26 dB Bandwidth


Channel 63 (6265 MHz)

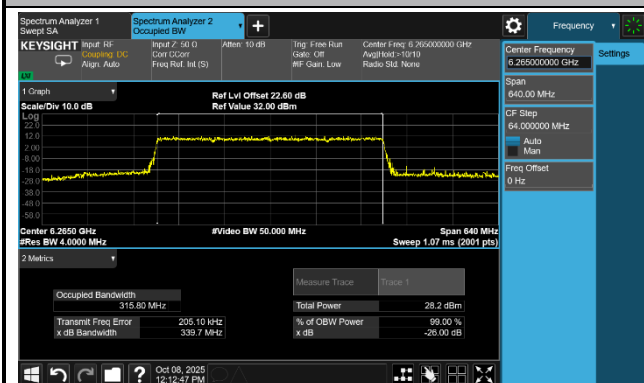

Channel 127 (6585 MHz)

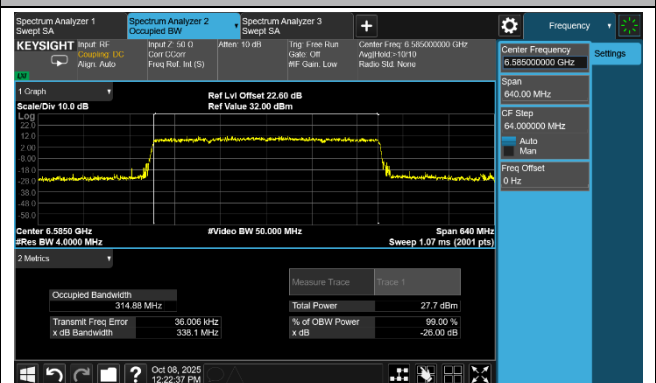

Channel 191 (6905 MHz)

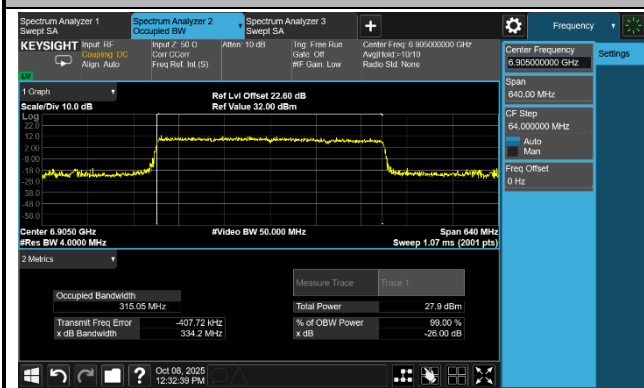

A.3 Output Power Test Result

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2025-09-27 ~ 2025-09-29	Test Mode	Nss = 1

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	Average Power (dBm)		Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 0	Ant 1				
802.11be-EHT20	MCS0	33	6115	9.30	8.98	12.15	1.95	14.10	≤ 30.00
802.11be-EHT20	MCS0	61	6255	9.42	9.07	12.26	1.95	14.21	≤ 30.00
802.11be-EHT20	MCS0	93	6415	9.19	9.06	12.14	1.95	14.09	≤ 30.00
802.11be-EHT20	MCS0	97	6435	9.73	9.62	12.69	1.95	14.64	≤ 30.00
802.11be-EHT20	MCS0	105	6475	9.77	9.65	12.72	1.95	14.67	≤ 30.00
802.11be-EHT20	MCS0	113	6515	9.79	9.58	12.70	1.95	14.65	≤ 30.00
802.11be-EHT20	MCS0	117	6535	9.25	9.13	12.20	1.95	14.15	≤ 30.00
802.11be-EHT20	MCS0	149	6695	9.23	9.04	12.15	1.95	14.10	≤ 30.00
802.11be-EHT20	MCS0	181	6855	9.29	9.16	12.24	1.95	14.19	≤ 30.00
802.11be-EHT20	MCS0	185	6875	9.22	9.05	12.15	1.95	14.10	≤ 30.00
802.11be-EHT20	MCS0	189	6895	9.33	9.15	12.25	1.95	14.20	≤ 30.00
802.11be-EHT20	MCS0	209	6995	9.37	9.08	12.24	1.95	14.19	≤ 30.00
802.11be-EHT20	MCS0	229	7095	9.32	9.04	12.19	1.95	14.14	≤ 30.00
802.11be-EHT40	MCS0	35	6125	12.24	11.52	14.91	1.95	16.86	≤ 30.00
802.11be-EHT40	MCS0	59	6245	12.31	11.63	14.99	1.95	16.94	≤ 30.00
802.11be-EHT40	MCS0	91	6405	12.22	11.49	14.88	1.95	16.83	≤ 30.00
802.11be-EHT40	MCS0	99	6445	12.31	11.53	14.95	1.95	16.90	≤ 30.00
802.11be-EHT40	MCS0	107	6485	12.19	11.67	14.95	1.95	16.90	≤ 30.00
802.11be-EHT40	MCS0	115	6525	12.20	11.69	14.96	1.95	16.91	≤ 30.00
802.11be-EHT40	MCS0	123	6565	12.32	11.53	14.95	1.95	16.90	≤ 30.00
802.11be-EHT40	MCS0	147	6685	12.29	11.97	15.14	1.95	17.09	≤ 30.00
802.11be-EHT40	MCS0	179	6845	11.96	12.58	15.29	1.95	17.24	≤ 30.00
802.11be-EHT40	MCS0	187	6885	12.32	12.44	15.39	1.95	17.34	≤ 30.00
802.11be-EHT40	MCS0	195	6925	11.89	12.68	15.31	1.95	17.26	≤ 30.00
802.11be-EHT40	MCS0	211	7005	12.23	11.66	14.96	1.95	16.91	≤ 30.00
802.11be-EHT40	MCS0	227	7085	12.31	11.98	15.16	1.95	17.11	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	Average Power (dBm)		Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 0	Ant 1				
802.11be-EHT80	MCS0	39	6145	16.25	15.24	18.78	1.95	20.73	≤ 30.00
802.11be-EHT80	MCS0	55	6225	15.22	14.67	17.96	1.95	19.91	≤ 30.00
802.11be-EHT80	MCS0	87	6385	15.46	15.03	18.26	1.95	20.21	≤ 30.00
802.11be-EHT80	MCS0	103	6465	15.31	14.75	18.05	1.95	20.00	≤ 30.00
802.11be-EHT80	MCS0	119	6545	15.68	15.02	18.37	1.95	20.32	≤ 30.00
802.11be-EHT80	MCS0	135	6625	16.33	15.26	18.84	1.95	20.79	≤ 30.00
802.11be-EHT80	MCS0	151	6705	15.62	14.98	18.32	1.95	20.27	≤ 30.00
802.11be-EHT80	MCS0	167	6785	15.74	15.13	18.46	1.95	20.41	≤ 30.00
802.11be-EHT80	MCS0	183	6865	15.69	15.03	18.38	1.95	20.33	≤ 30.00
802.11be-EHT80	MCS0	199	6945	15.45	15.20	18.34	1.95	20.29	≤ 30.00
802.11be-EHT80	MCS0	215	7025	15.79	14.97	18.41	1.95	20.36	≤ 30.00
802.11be-EHT160	MCS0	47	6185	18.10	16.82	20.52	1.95	22.47	≤ 30.00
802.11be-EHT160	MCS0	79	6345	17.94	16.95	20.48	1.95	22.43	≤ 30.00
802.11be-EHT160	MCS0	111	6505	17.86	16.89	20.41	1.95	22.36	≤ 30.00
802.11be-EHT160	MCS0	143	6665	18.04	16.56	20.37	1.95	22.32	≤ 30.00
802.11be-EHT160	MCS0	175	6825	18.22	17.44	20.86	1.95	22.81	≤ 30.00
802.11be-EHT160	MCS0	207	6985	17.43	17.57	20.51	1.95	22.46	≤ 30.00
802.11be-EHT320	MCS0	63	6265	19.32	19.47	22.41	1.95	24.36	≤ 30.00
802.11be-EHT320	MCS0	127	6585	19.22	19.12	22.18	1.95	24.13	≤ 30.00
802.11be-EHT320	MCS0	191	6905	18.10	17.90	21.01	1.95	22.96	≤ 30.00

Note 1: Total Average Power (dBm) = $10 \times \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: EIRP (dBm) = Total Average Power (dBm) + Directional Gain (dBi).

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2025-09-26 ~ 2025-09-29	Test Mode	Nss = 2

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	Average Power (dBm)		Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 0	Ant 1				
802.11be-EHT20	MCS0	33	6115	10.99	10.56	13.79	1.95	15.74	≤ 30.00
802.11be-EHT20	MCS0	61	6255	11.08	10.58	13.85	1.95	15.80	≤ 30.00
802.11be-EHT20	MCS0	93	6415	11.33	10.23	13.83	1.95	15.78	≤ 30.00
802.11be-EHT20	MCS0	97	6435	10.79	10.85	13.83	1.95	15.78	≤ 30.00
802.11be-EHT20	MCS0	105	6475	10.85	11.12	14.00	1.95	15.95	≤ 30.00
802.11be-EHT20	MCS0	113	6515	11.48	11.15	14.33	1.95	16.28	≤ 30.00
802.11be-EHT20	MCS0	117	6535	11.02	10.68	13.86	1.95	15.81	≤ 30.00
802.11be-EHT20	MCS0	149	6695	11.62	10.48	14.10	1.95	16.05	≤ 30.00
802.11be-EHT20	MCS0	181	6855	11.49	10.65	14.10	1.95	16.05	≤ 30.00
802.11be-EHT20	MCS0	185	6875	11.32	10.76	14.06	1.95	16.01	≤ 30.00
802.11be-EHT20	MCS0	189	6895	11.28	10.69	14.01	1.95	15.96	≤ 30.00
802.11be-EHT20	MCS0	209	6995	11.06	10.76	13.92	1.95	15.87	≤ 30.00
802.11be-EHT20	MCS0	229	7095	10.98	10.59	13.80	1.95	15.75	≤ 30.00
802.11be-EHT40	MCS0	35	6125	14.18	13.32	16.78	1.95	18.73	≤ 30.00
802.11be-EHT40	MCS0	59	6245	14.27	13.46	16.89	1.95	18.84	≤ 30.00
802.11be-EHT40	MCS0	91	6405	14.83	13.56	17.25	1.95	19.20	≤ 30.00
802.11be-EHT40	MCS0	99	6445	14.74	13.78	17.30	1.95	19.25	≤ 30.00
802.11be-EHT40	MCS0	107	6485	14.59	13.62	17.14	1.95	19.09	≤ 30.00
802.11be-EHT40	MCS0	115	6525	14.47	13.81	17.16	1.95	19.11	≤ 30.00
802.11be-EHT40	MCS0	123	6565	14.22	13.35	16.82	1.95	18.77	≤ 30.00
802.11be-EHT40	MCS0	147	6685	14.13	13.45	16.81	1.95	18.76	≤ 30.00
802.11be-EHT40	MCS0	179	6845	14.32	13.69	17.03	1.95	18.98	≤ 30.00
802.11be-EHT40	MCS0	187	6885	14.16	13.73	16.96	1.95	18.91	≤ 30.00
802.11be-EHT40	MCS0	195	6925	14.61	14.02	17.34	1.95	19.29	≤ 30.00
802.11be-EHT40	MCS0	211	7005	14.59	14.13	17.38	1.95	19.33	≤ 30.00
802.11be-EHT40	MCS0	227	7085	14.65	13.97	17.33	1.95	19.28	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	Average Power (dBm)		Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 0	Ant 1				
802.11be-EHT80	MCS0	39	6145	16.19	16.02	19.12	1.95	21.07	≤ 30.00
802.11be-EHT80	MCS0	55	6225	16.24	16.13	19.20	1.95	21.15	≤ 30.00
802.11be-EHT80	MCS0	87	6385	16.29	16.24	19.28	1.95	21.23	≤ 30.00
802.11be-EHT80	MCS0	103	6465	16.56	16.44	19.51	1.95	21.46	≤ 30.00
802.11be-EHT80	MCS0	119	6545	16.85	16.39	19.64	1.95	21.59	≤ 30.00
802.11be-EHT80	MCS0	135	6625	16.71	16.88	19.81	1.95	21.76	≤ 30.00
802.11be-EHT80	MCS0	151	6705	17.44	16.93	20.20	1.95	22.15	≤ 30.00
802.11be-EHT80	MCS0	167	6785	17.80	17.32	20.58	1.95	22.53	≤ 30.00
802.11be-EHT80	MCS0	183	6865	17.65	17.49	20.58	1.95	22.53	≤ 30.00
802.11be-EHT80	MCS0	199	6945	17.33	16.97	20.16	1.95	22.11	≤ 30.00
802.11be-EHT80	MCS0	215	7025	17.41	16.57	20.02	1.95	21.97	≤ 30.00
802.11be-EHT160	MCS0	47	6185	20.15	19.82	23.00	1.95	24.95	≤ 30.00
802.11be-EHT160	MCS0	79	6345	19.82	20.29	23.07	1.95	25.02	≤ 30.00
802.11be-EHT160	MCS0	111	6505	20.20	20.03	23.13	1.95	25.08	≤ 30.00
802.11be-EHT160	MCS0	143	6665	20.21	19.96	23.10	1.95	25.05	≤ 30.00
802.11be-EHT160	MCS0	175	6825	20.13	19.99	23.07	1.95	25.02	≤ 30.00
802.11be-EHT160	MCS0	207	6985	19.00	18.75	21.89	1.95	23.84	≤ 30.00
802.11be-EHT320	MCS0	63	6265	19.32	19.51	22.43	1.95	24.38	≤ 30.00
802.11be-EHT320	MCS0	127	6585	19.12	19.22	22.18	1.95	24.13	≤ 30.00
802.11be-EHT320	MCS0	191	6905	18.52	18.31	21.43	1.95	23.38	≤ 30.00

Note 1: Total Average Power (dBm) = $10 \times \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: EIRP (dBm) = Total Average Power (dBm) + Directional Gain (dBi).

A.4 Power Spectral Density Test Result

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2025-09-27 ~ 2025-09-29	Test Mode	Nss = 1

Test Mode	Data Rate/MCS	Channel No.	Frequency (MHz)	PSD (dBm/MHz)		Duty Cycle (%)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)
				Ant 0	Ant 1				
802.11be-EHT20	MCS0	33	6115	-3.486	-3.410	96.74	4.95	4.66	≤ 5.00
802.11be-EHT20	MCS0	61	6255	-3.253	-3.251	96.74	4.95	4.85	≤ 5.00
802.11be-EHT20	MCS0	93	6415	-3.007	-3.229	96.74	4.95	4.99	≤ 5.00
802.11be-EHT20	MCS0	97	6435	-3.985	-3.414	96.74	4.95	4.41	≤ 5.00
802.11be-EHT20	MCS0	105	6475	-3.416	-2.995	96.74	4.95	4.90	≤ 5.00
802.11be-EHT20	MCS0	113	6515	-2.982	-3.275	96.74	4.95	4.98	≤ 5.00
802.11be-EHT20	MCS0	117	6535	-3.579	-3.672	96.74	4.95	4.48	≤ 5.00
802.11be-EHT20	MCS0	149	6695	-2.945	-3.563	96.74	4.95	4.86	≤ 5.00
802.11be-EHT20	MCS0	181	6855	-3.725	-3.167	96.74	4.95	4.67	≤ 5.00
802.11be-EHT20	MCS0	185	6875	-3.594	-3.140	96.74	4.95	4.74	≤ 5.00
802.11be-EHT20	MCS0	189	6895	-3.822	-3.044	96.74	4.95	4.69	≤ 5.00
802.11be-EHT20	MCS0	209	6995	-3.468	-3.285	96.74	4.95	4.73	≤ 5.00
802.11be-EHT20	MCS0	229	7095	-3.762	-3.312	96.74	4.95	4.57	≤ 5.00
802.11be-EHT40	MCS0	35	6125	-3.536	-4.074	95.63	4.95	4.36	≤ 5.00
802.11be-EHT40	MCS0	59	6245	-3.162	-4.486	95.63	4.95	4.38	≤ 5.00
802.11be-EHT40	MCS0	91	6405	-2.758	-4.419	95.63	4.95	4.64	≤ 5.00
802.11be-EHT40	MCS0	99	6445	-3.104	-3.547	95.63	4.95	4.83	≤ 5.00
802.11be-EHT40	MCS0	107	6485	-3.065	-3.869	95.63	4.95	4.71	≤ 5.00
802.11be-EHT40	MCS0	115	6525	-3.613	-3.441	95.63	4.95	4.63	≤ 5.00
802.11be-EHT40	MCS0	123	6565	-3.584	-3.914	95.63	4.95	4.41	≤ 5.00
802.11be-EHT40	MCS0	147	6685	-3.096	-3.637	95.63	4.95	4.80	≤ 5.00
802.11be-EHT40	MCS0	179	6845	-3.535	-3.215	95.63	4.95	4.78	≤ 5.00
802.11be-EHT40	MCS0	187	6885	-3.723	-2.959	95.63	4.95	4.83	≤ 5.00
802.11be-EHT40	MCS0	195	6925	-3.432	-3.561	95.63	4.95	4.66	≤ 5.00
802.11be-EHT40	MCS0	211	7005	-3.140	-3.230	95.63	4.95	4.97	≤ 5.00
802.11be-EHT40	MCS0	227	7085	-3.243	-3.706	95.63	4.95	4.69	≤ 5.00

Test Mode	Data Rate/MCS	Channel No.	Frequency (MHz)	PSD (dBm/MHz)		Duty Cycle (%)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)
				Ant 0	Ant 1				
802.11be-EHT80	MCS0	39	6145	-2.780	-3.726	98.19	4.95	4.73	≤ 5.00
802.11be-EHT80	MCS0	55	6225	-2.536	-4.116	98.19	4.95	4.71	≤ 5.00
802.11be-EHT80	MCS0	87	6385	-2.619	-3.476	98.19	4.95	4.93	≤ 5.00
802.11be-EHT80	MCS0	103	6465	-3.333	-3.894	98.19	4.95	4.36	≤ 5.00
802.11be-EHT80	MCS0	119	6545	-2.992	-3.348	98.19	4.95	4.79	≤ 5.00
802.11be-EHT80	MCS0	135	6625	-3.034	-3.559	98.19	4.95	4.67	≤ 5.00
802.11be-EHT80	MCS0	151	6705	-2.710	-3.723	98.19	4.95	4.77	≤ 5.00
802.11be-EHT80	MCS0	167	6785	-2.637	-3.484	98.19	4.95	4.92	≤ 5.00
802.11be-EHT80	MCS0	183	6865	-3.062	-3.178	98.19	4.95	4.84	≤ 5.00
802.11be-EHT80	MCS0	199	6945	-2.714	-3.435	98.19	4.95	4.90	≤ 5.00
802.11be-EHT80	MCS0	215	7025	-2.727	-3.660	98.19	4.95	4.79	≤ 5.00
802.11be-EHT160	MCS0	47	6185	-2.867	-3.597	98.75	4.95	4.74	≤ 5.00
802.11be-EHT160	MCS0	79	6345	-3.029	-2.978	98.75	4.95	4.96	≤ 5.00
802.11be-EHT160	MCS0	111	6505	-3.064	-3.333	98.75	4.95	4.76	≤ 5.00
802.11be-EHT160	MCS0	143	6665	-3.004	-3.213	98.75	4.95	4.85	≤ 5.00
802.11be-EHT160	MCS0	175	6825	-3.300	-3.245	98.75	4.95	4.69	≤ 5.00
802.11be-EHT160	MCS0	207	6985	-3.725	-3.378	98.75	4.95	4.41	≤ 5.00
802.11be-EHT320	MCS0	63	6265	-4.331	-4.511	95.74	4.95	3.73	≤ 5.00
802.11be-EHT320	MCS0	127	6585	-4.745	-5.041	95.74	4.95	3.26	≤ 5.00
802.11be-EHT320	MCS0	191	6905	-5.747	-5.518	95.74	4.95	2.52	≤ 5.00

Note: When EUT duty cycle < 98%, EIRP PSD (dBm/MHz) = $10 \times \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$ (dBm/MHz) + $10 \times \log (1/\text{Duty Cycle})$ + Directional Gain (dBi).

When EUT duty cycle > 98%, EIRP PSD (dBm/MHz) = $10 \times \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$ (dBm/MHz) + Directional Gain (dBi).

802.11be-EHT20 Power Spectral Density- Ant 0 (Nss = 1)


Channel 33 (6115 MHz)




Channel 61 (6255 MHz)




Channel 93 (6415 MHz)

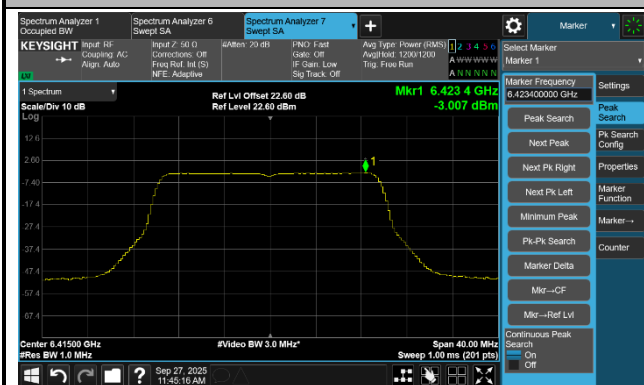


Channel 97 (6435 MHz)

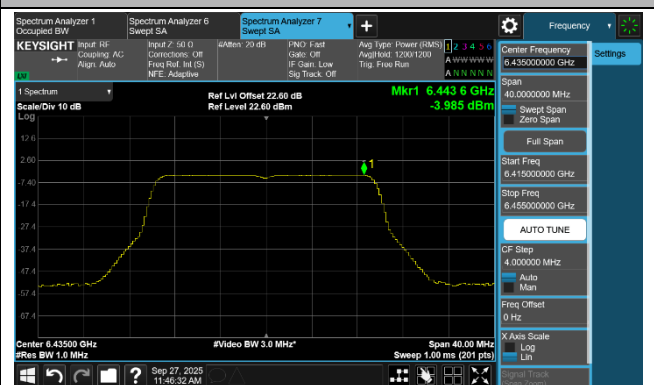

Channel 105 (6475 MHz)

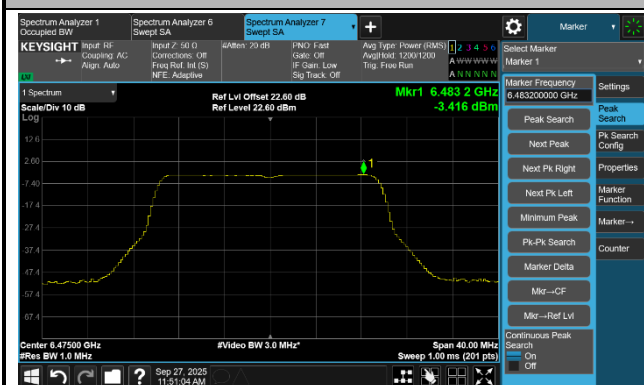


Channel 113 (6515 MHz)

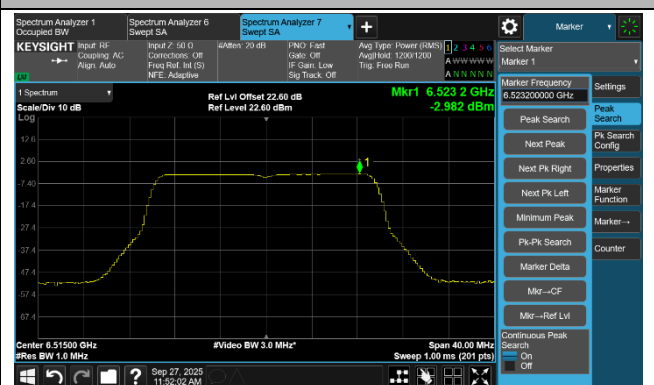

802.11be-EHT20 Power Spectral Density- Ant 0 (Nss = 1)


Channel 117 (6535 MHz)

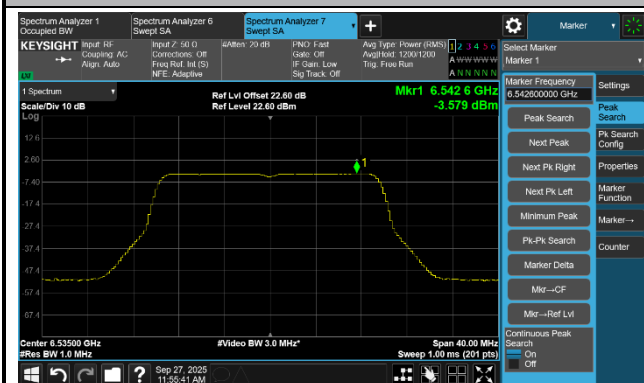

Channel 149 (6695 MHz)



Channel 181 (6855 MHz)

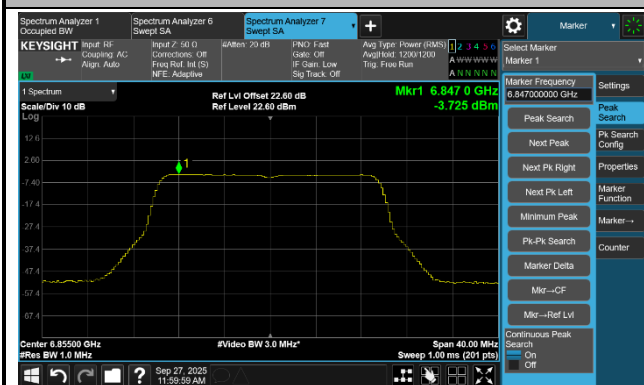


Channel 185 (6875 MHz)




Channel 189 (6895 MHz)




Channel 209 (6995 MHz)

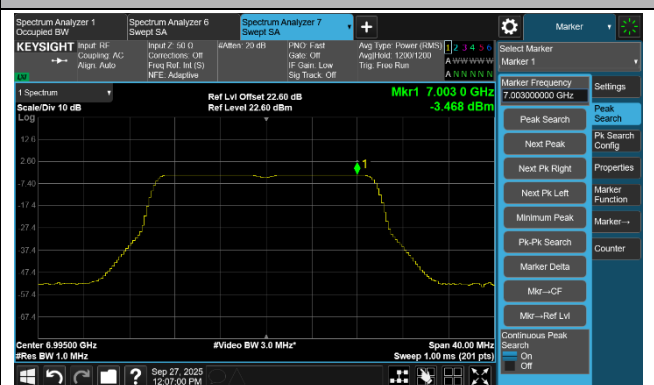

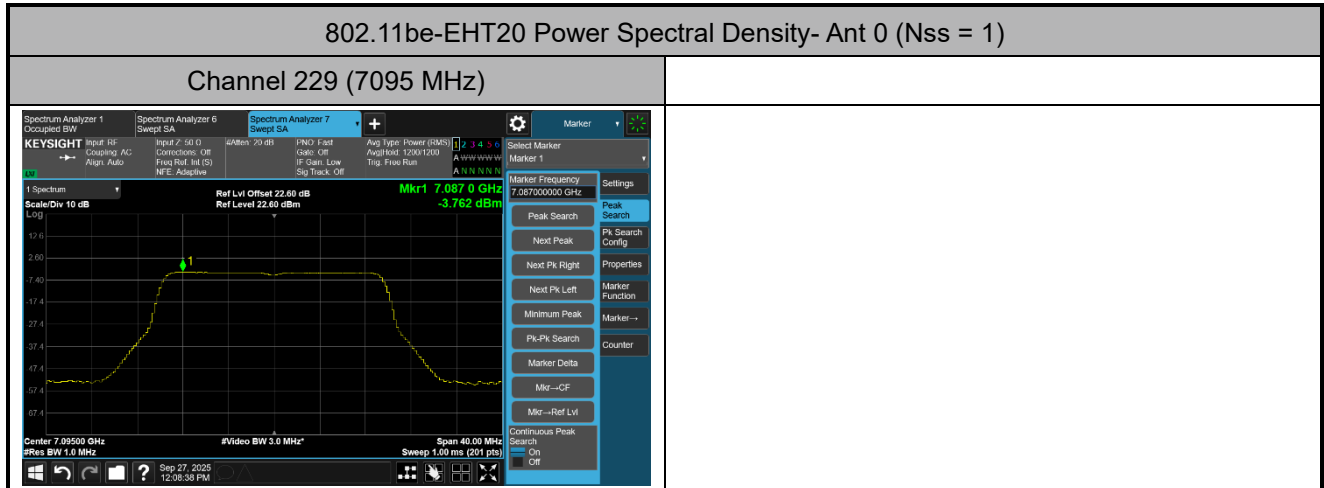

802.11be-EHT40 Power Spectral Density- Ant 0 (Nss = 1)


Channel 35 (6125 MHz)

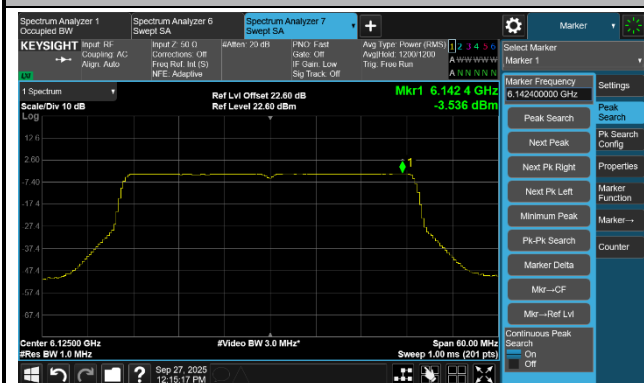


Channel 59 (6245 MHz)




Channel 91 (6405 MHz)

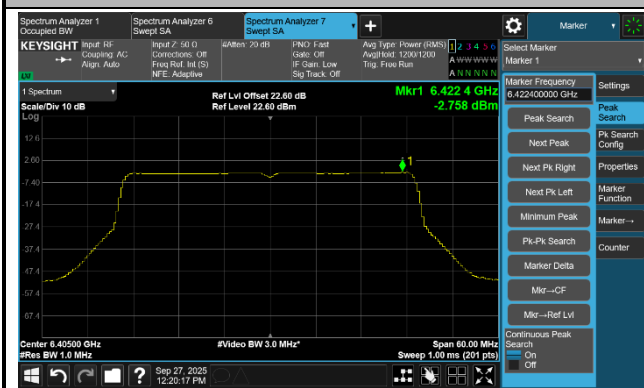

Channel 99 (6445 MHz)

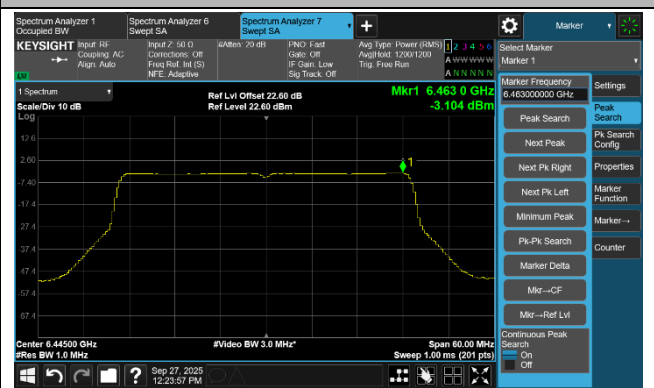

Channel 107 (6485 MHz)

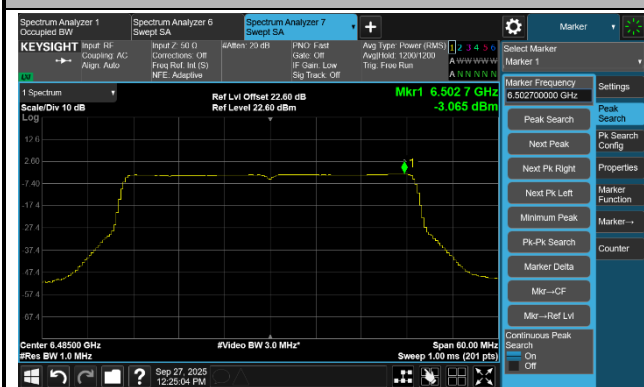


Channel 115 (6525 MHz)



802.11be-EHT40 Power Spectral Density- Ant 0 (Nss = 1)


Channel 123 (6565 MHz)

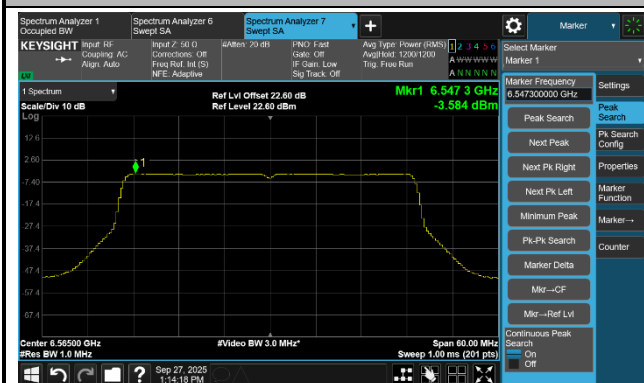


Channel 147 (6685 MHz)




Channel 179 (6845 MHz)

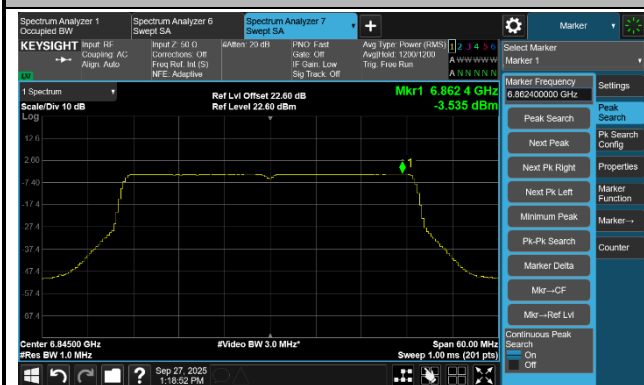

Channel 187 (6885 MHz)

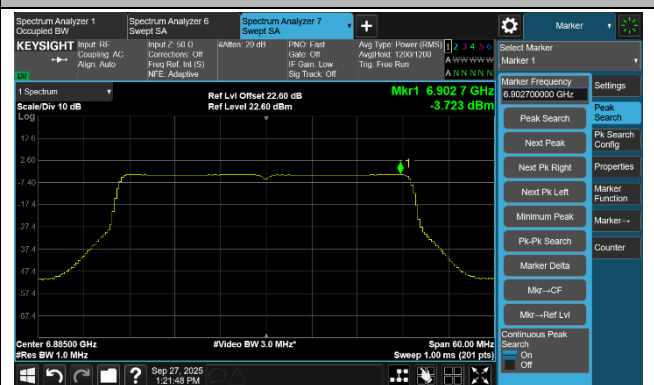

Channel 195 (6925 MHz)

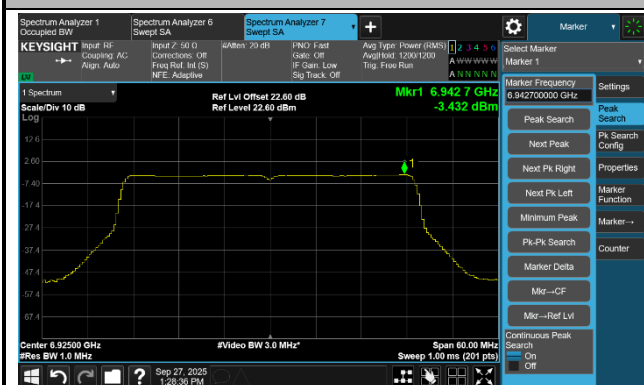


Channel 211 (7005 MHz)




802.11be-EHT40 Power Spectral Density- Ant 0 (Nss = 1)

Channel 227 (7085 MHz)

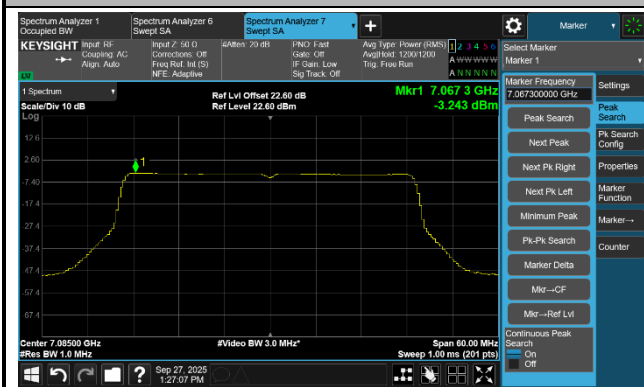


802.11be-EHT80 Power Spectral Density- Ant 0 (Nss = 1)


Channel 39 (6145 MHz)

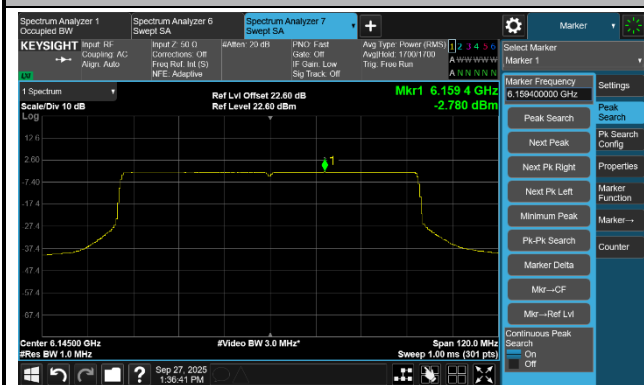


Channel 55 (6225 MHz)

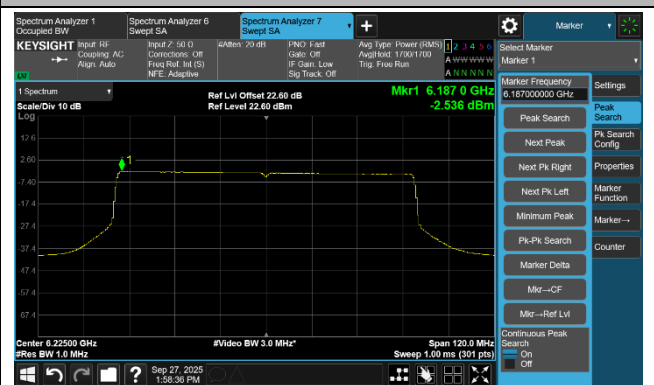


Channel 87 (6385 MHz)

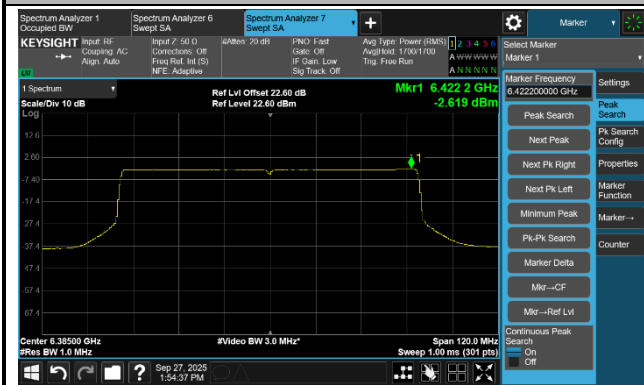


Channel 103 (6465 MHz)

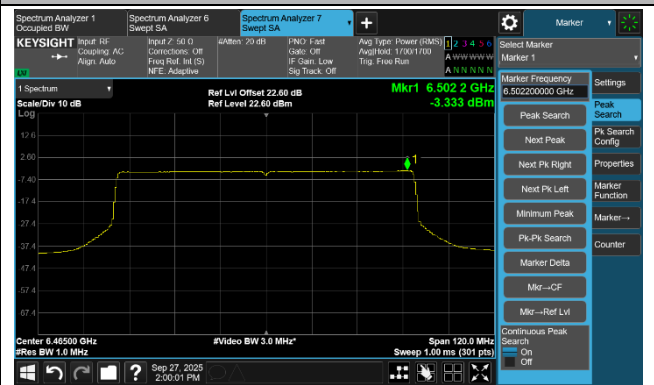

Channel 119 (6545 MHz)

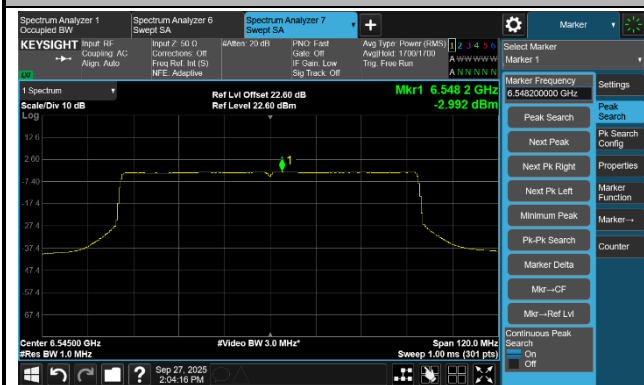


Channel 135 (6625 MHz)

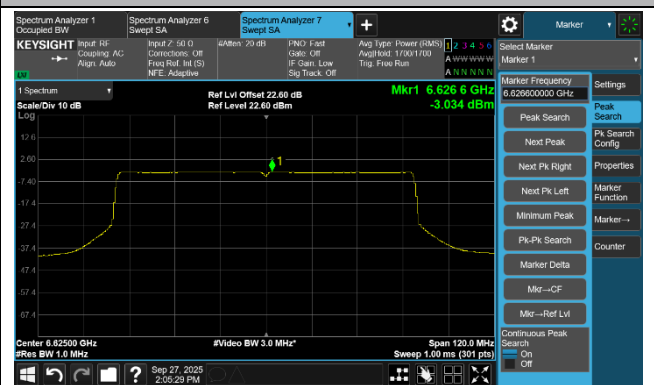


802.11be-EHT80 Power Spectral Density- Ant 0 (Nss = 1)


Channel 151 (6705 MHz)

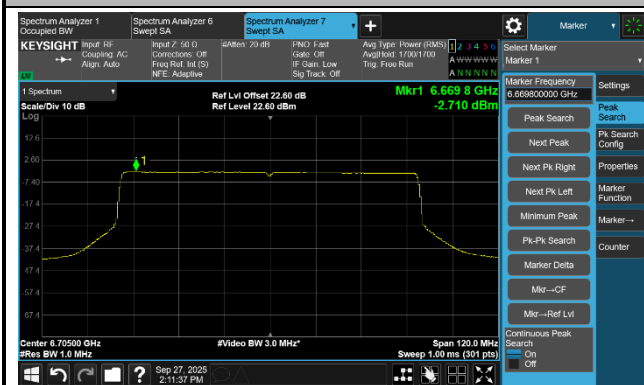


Channel 167 (6785 MHz)

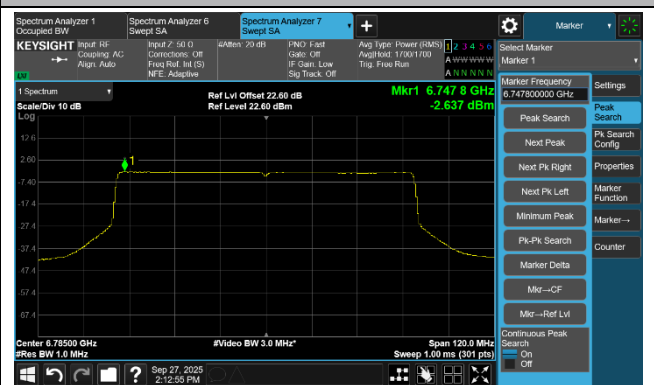

Channel 183 (6865 MHz)

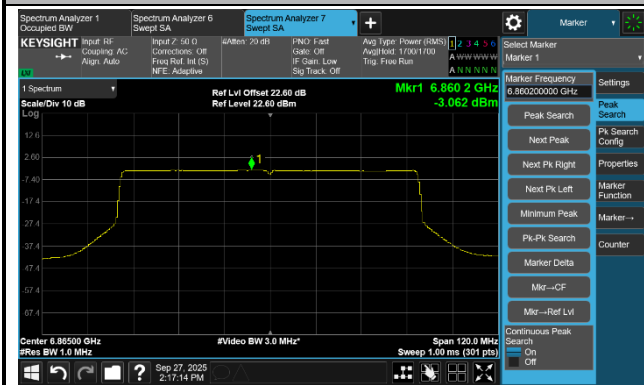

Channel 199 (6945 MHz)

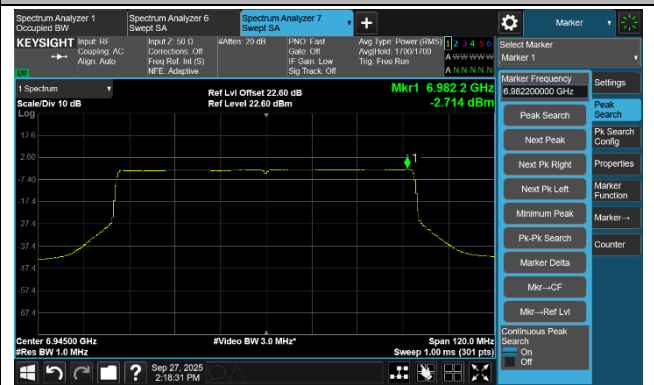

Channel 215 (7025 MHz)

