


|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-2C_TX A Mode 5720MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

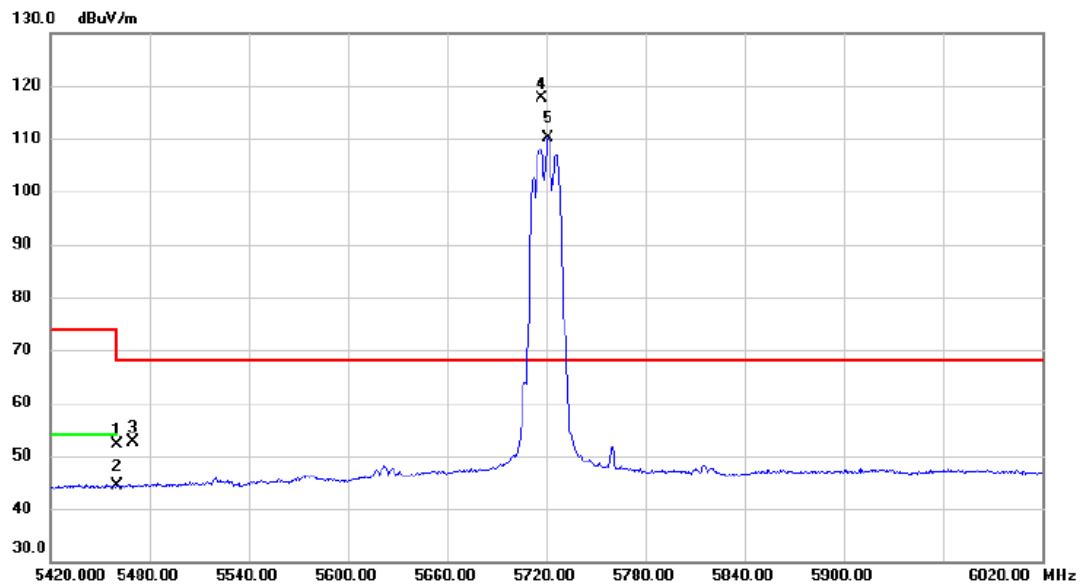


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5460.000     | 36.24                    | 16.01                   | 52.25                      | 74.00           | -21.75       | peak     |          |
| 2   |     | 5460.000     | 28.43                    | 16.01                   | 44.44                      | 54.00           | -9.56        | AVG      |          |
| 3   |     | 5470.000     | 36.52                    | 16.02                   | 52.54                      | 68.20           | -15.66       | peak     |          |
| 4   | *   | 5717.000     | 100.59                   | 17.03                   | 117.62                     | 68.20           | 49.42        | peak     | No Limit |
| 5   | X   | 5721.200     | 92.95                    | 17.06                   | 110.01                     | 68.20           | 41.81        | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2C_TX A Mode 5720 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

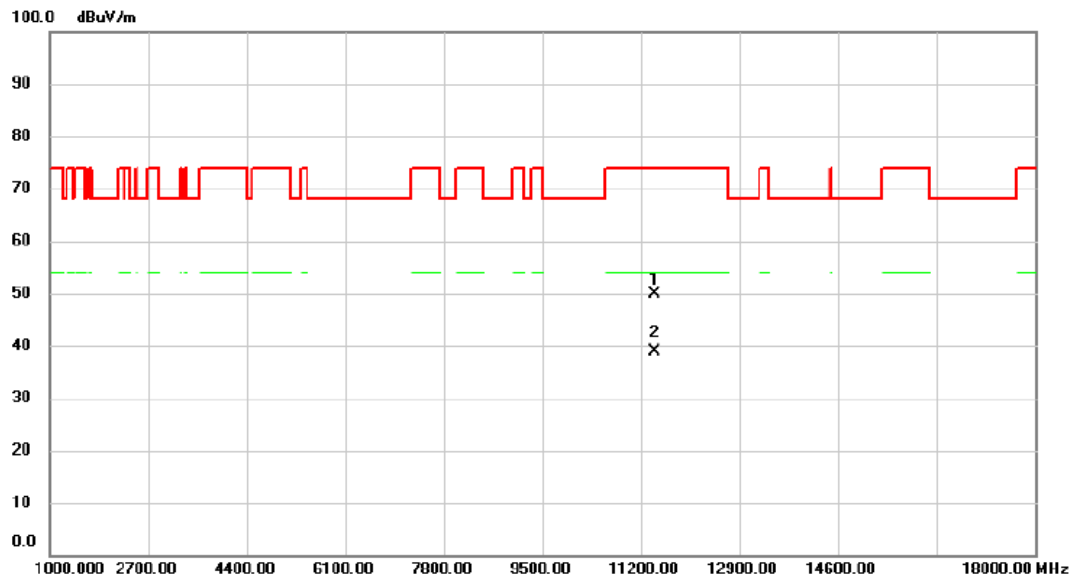


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11438.770    | 36.26                    | 13.69                   | 49.95                      | 74.00           | -24.05       | peak     |         |
| 2   | *   | 11442.140    | 25.19                    | 13.70                   | 38.89                      | 54.00           | -15.11       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5500 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

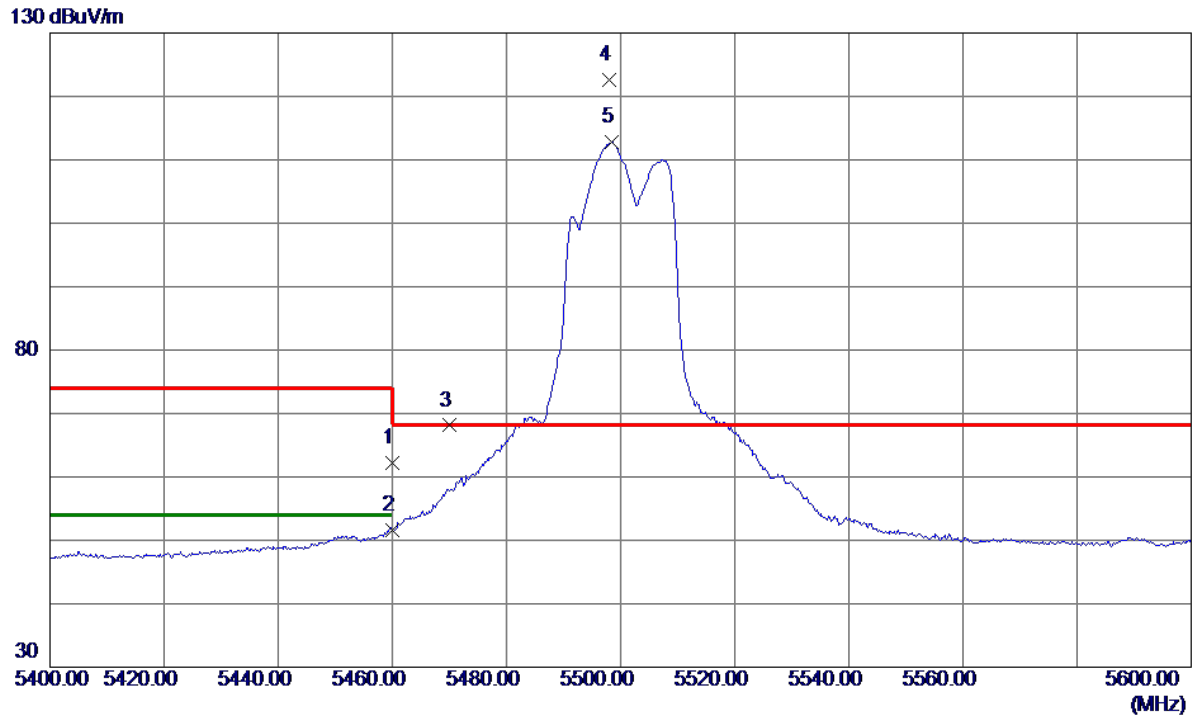


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 45.64                      | 16.64                   | 62.28                     | 74.00           | -11.72       | Peak     |          |
| 2   | 5460.0000    | 34.95                      | 16.64                   | 51.59                     | 54.00           | -2.41        | AVG      |          |
| 3   | 5470.0000    | 51.44                      | 16.66                   | 68.10                     | 68.20           | -0.10        | Peak     |          |
| 4 * | 5498.0000    | 105.96                     | 16.73                   | 122.69                    | 68.20           | 54.49        | Peak     | No Limit |
| 5   | 5498.4000    | 96.01                      | 16.74                   | 112.75                    | 999.00          | -886.25      | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5500 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

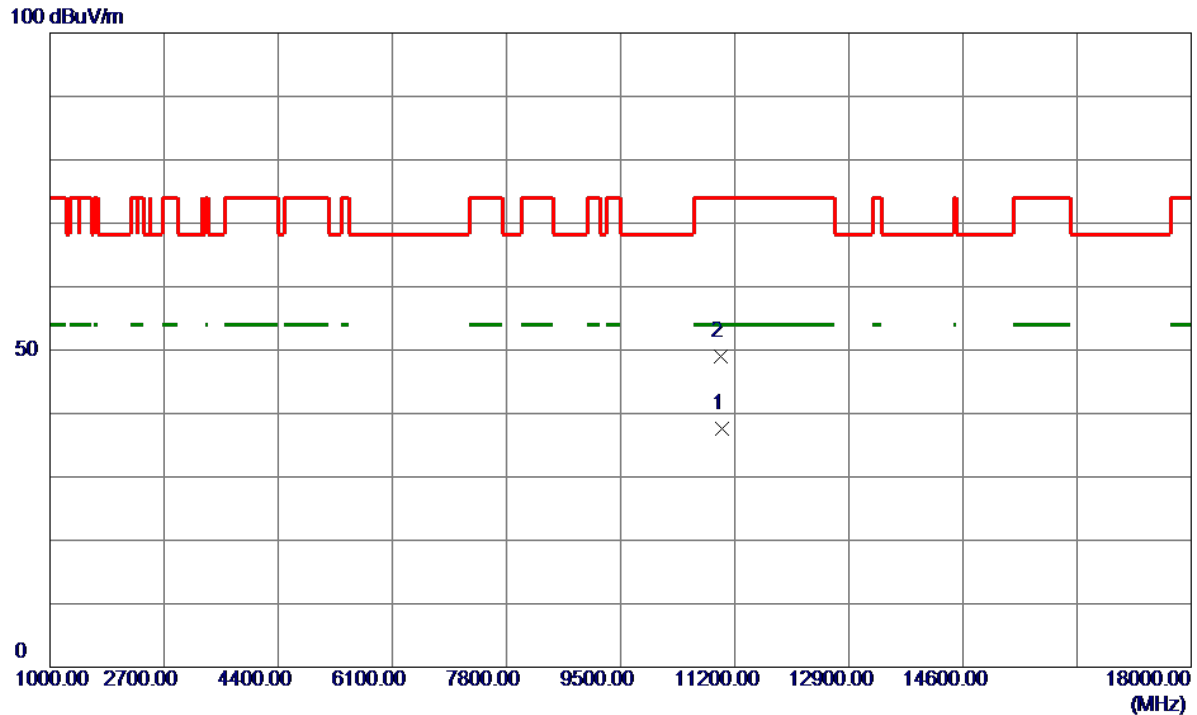


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11004.4500   | 25.82                      | 11.84                   | 37.66                     | 54.00           | -16.34       | AVG      |         |
| 2   | 10999.9500   | 37.15                      | 11.82                   | 48.97                     | 74.00           | -25.03       | Peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5580 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

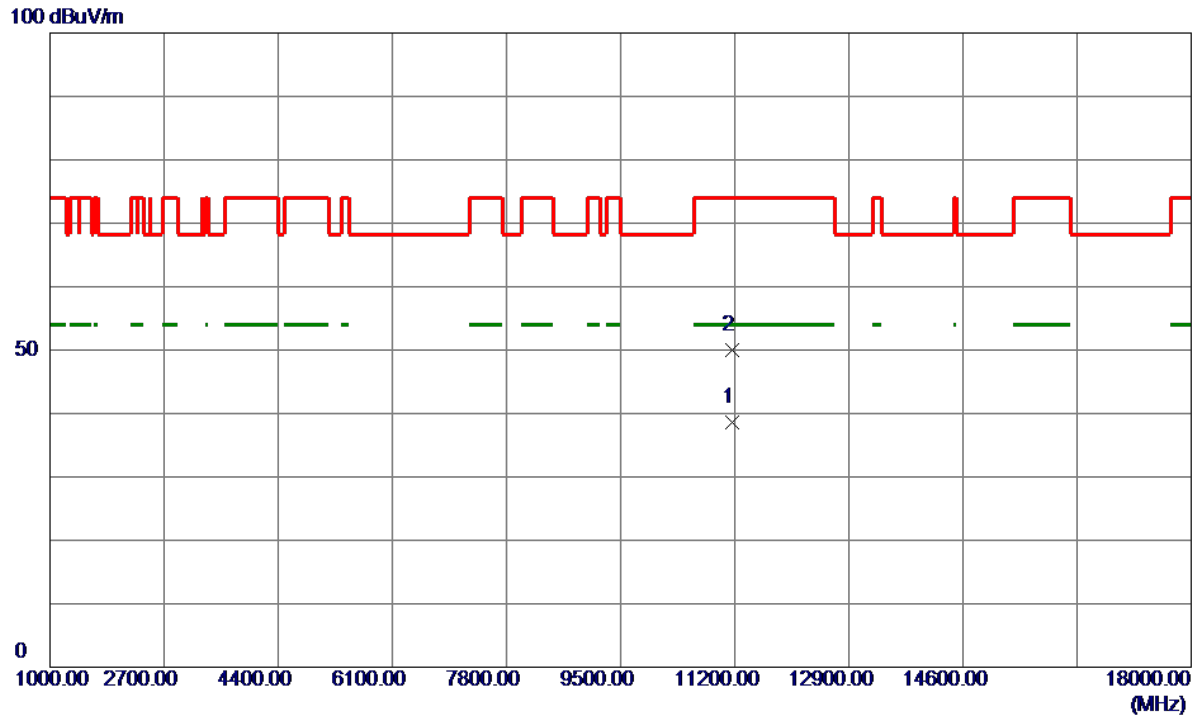


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11156.2500   | 26.15                      | 12.49                   | 38.64                     | 54.00           | -15.36       | AVG      |         |
| 2   | 11161.3000   | 37.58                      | 12.51                   | 50.09                     | 74.00           | -23.91       | Peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5700 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

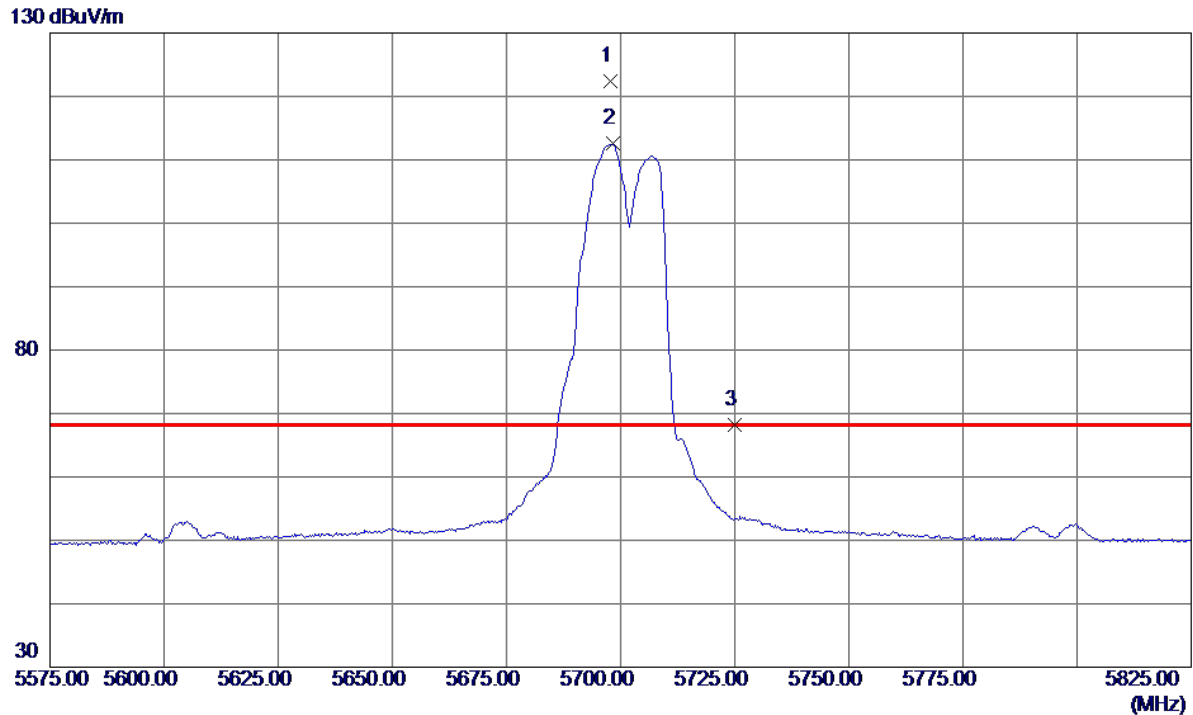


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5697.7500    | 105.13                     | 17.32                   | 122.45                    | 68.20           | 54.25        | Peak     | No Limit |
| 2   | 5698.2500    | 95.27                      | 17.32                   | 112.59                    | 999.00          | -886.41      | AVG      | No Limit |
| 3   | 5725.0000    | 50.74                      | 17.40                   | 68.14                     | 68.20           | -0.06        | Peak     |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5700 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

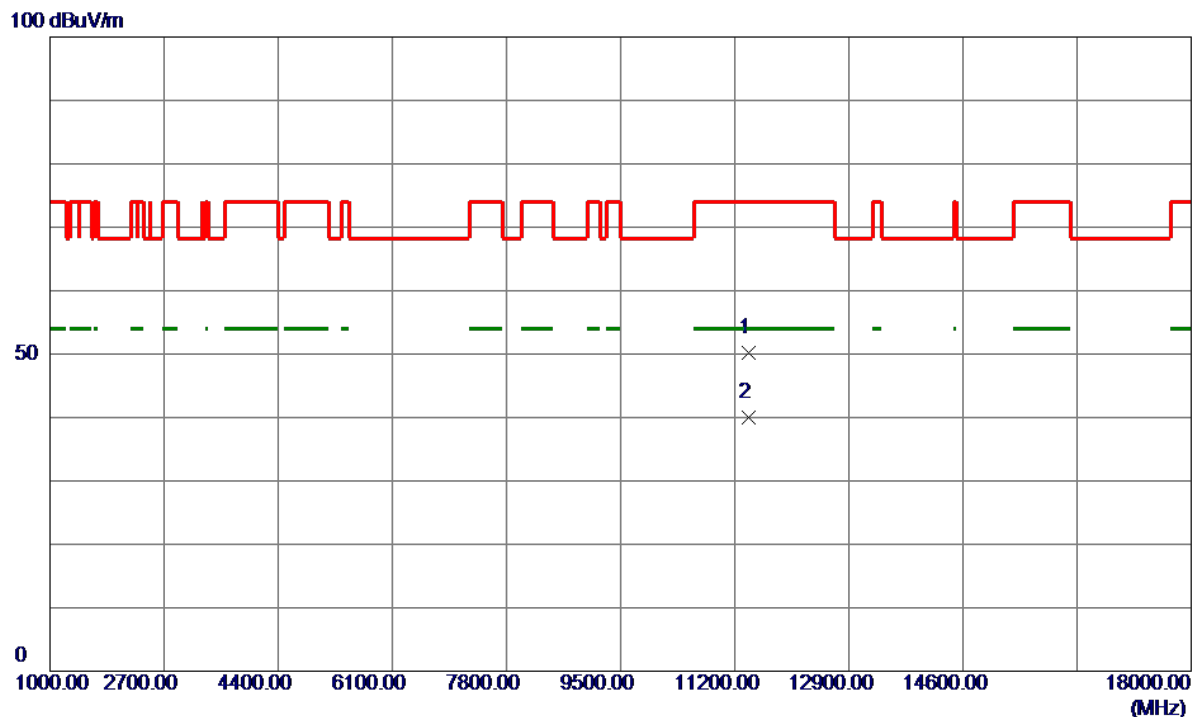


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11399.5000   | 36.76                      | 13.52                   | 50.28                     | 74.00           | -23.72       | Peak     |         |
| 2 * | 11399.8500   | 26.39                      | 13.52                   | 39.91                     | 54.00           | -14.09       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5720MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

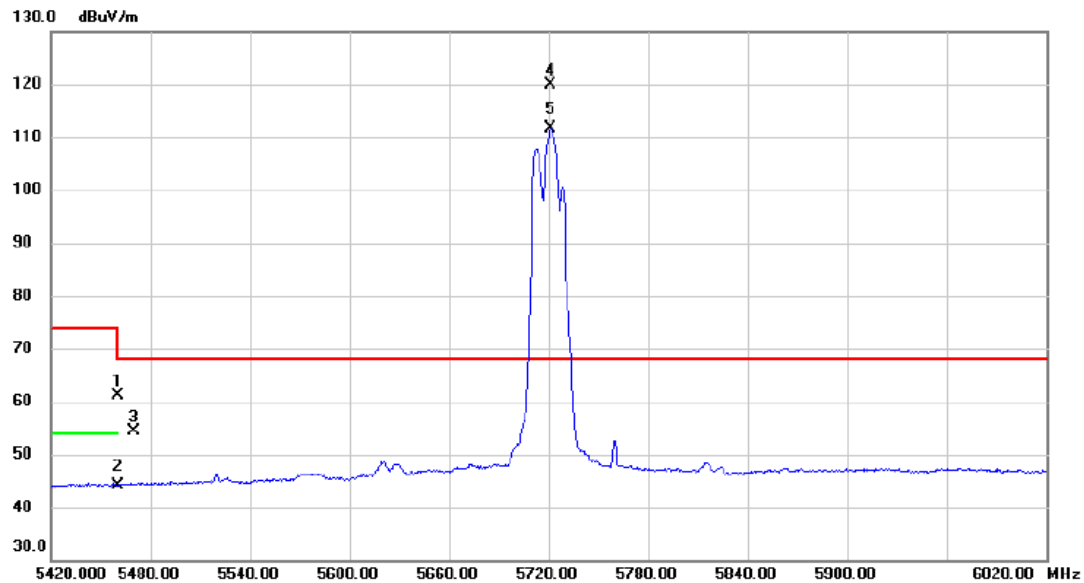


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5460.000     | 45.18                    | 16.01                   | 61.19                      | 74.00           | -12.81       | peak     |          |
| 2   |     | 5460.000     | 28.16                    | 16.01                   | 44.17                      | 54.00           | -9.83        | AVG      |          |
| 3   |     | 5470.000     | 38.25                    | 16.02                   | 54.27                      | 68.20           | -13.93       | peak     |          |
| 4   | *   | 5721.200     | 102.71                   | 17.06                   | 119.77                     | 68.20           | 51.57        | peak     | No Limit |
| 5   | X   | 5721.200     | 94.69                    | 17.06                   | 111.75                     | 68.20           | 43.55        | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode 5720 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

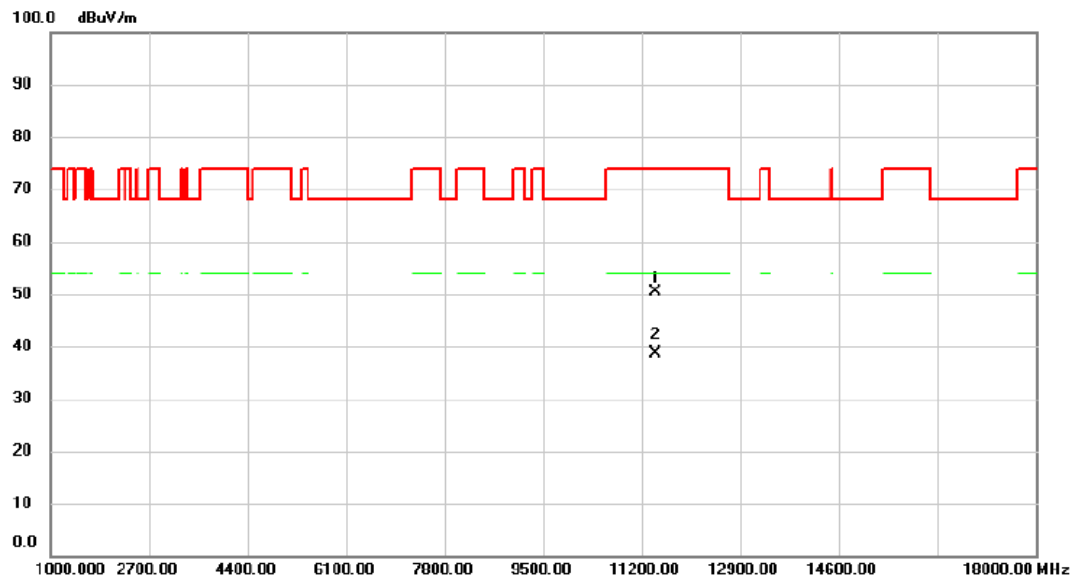


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11442.910    | 36.59                    | 13.71                   | 50.30                      | 74.00           | -23.70       | peak     |         |
| 2   | *   | 11443.720    | 25.00                    | 13.71                   | 38.71                      | 54.00           | -15.29       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5510 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

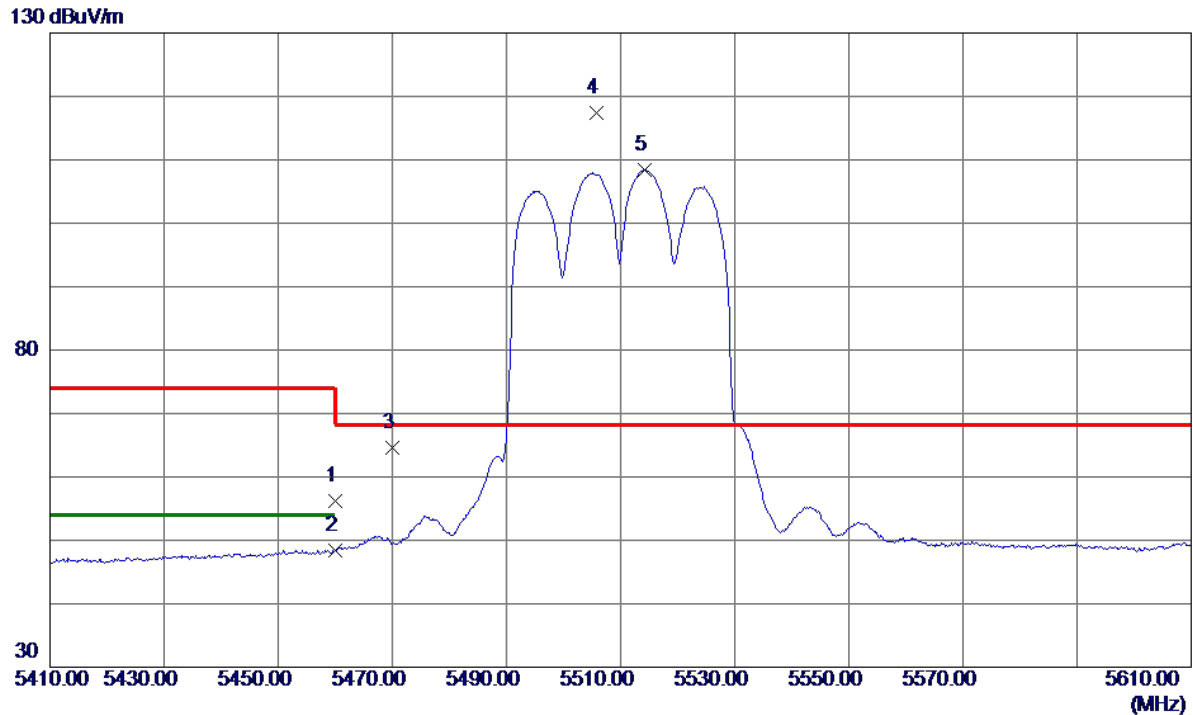


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 39.58                      | 16.64                   | 56.22                     | 74.00           | -17.78       | Peak     |          |
| 2   | 5460.0000    | 31.85                      | 16.64                   | 48.49                     | 54.00           | -5.51        | AVG      |          |
| 3   | 5470.0000    | 47.88                      | 16.66                   | 64.54                     | 68.20           | -3.66        | Peak     |          |
| 4 * | 5505.8000    | 100.66                     | 16.76                   | 117.42                    | 68.20           | 49.22        | Peak     | No Limit |
| 5   | 5514.2000    | 91.70                      | 16.78                   | 108.48                    | 999.00          | -890.52      | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5510 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

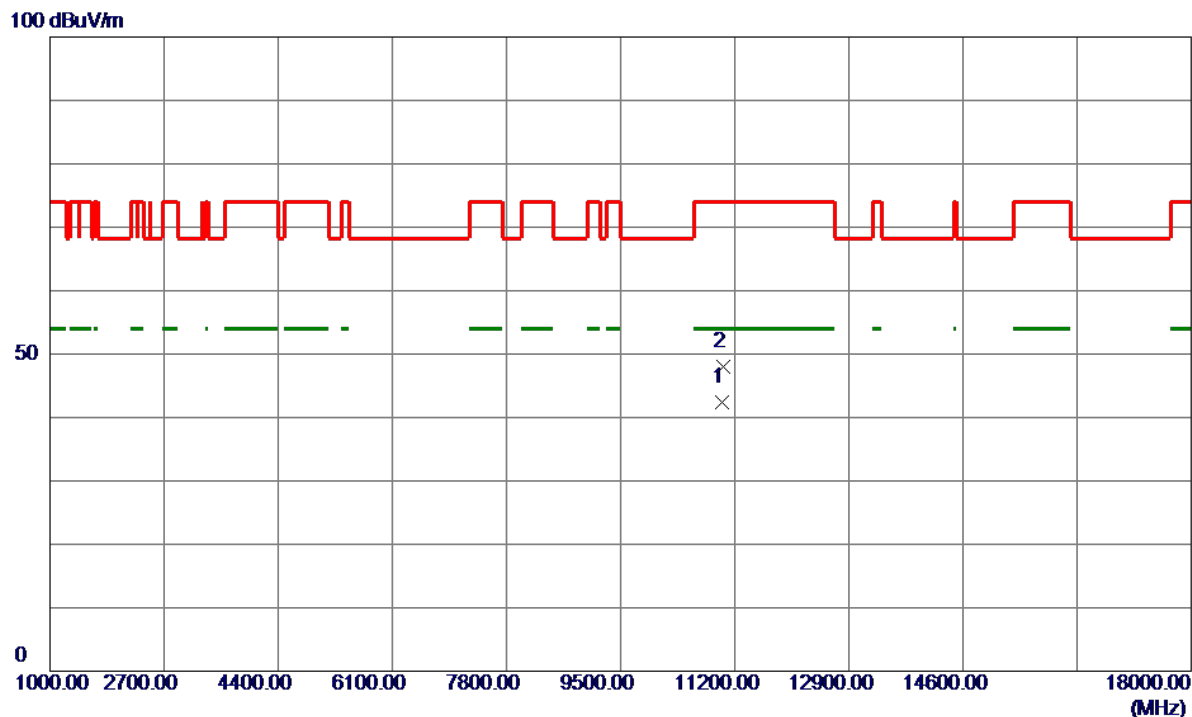


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11020.0000   | 30.55                      | 11.91                   | 42.46                     | 54.00           | -11.54       | AVG      |         |
| 2   | 11023.1500   | 36.07                      | 11.92                   | 47.99                     | 74.00           | -26.01       | Peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5550 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

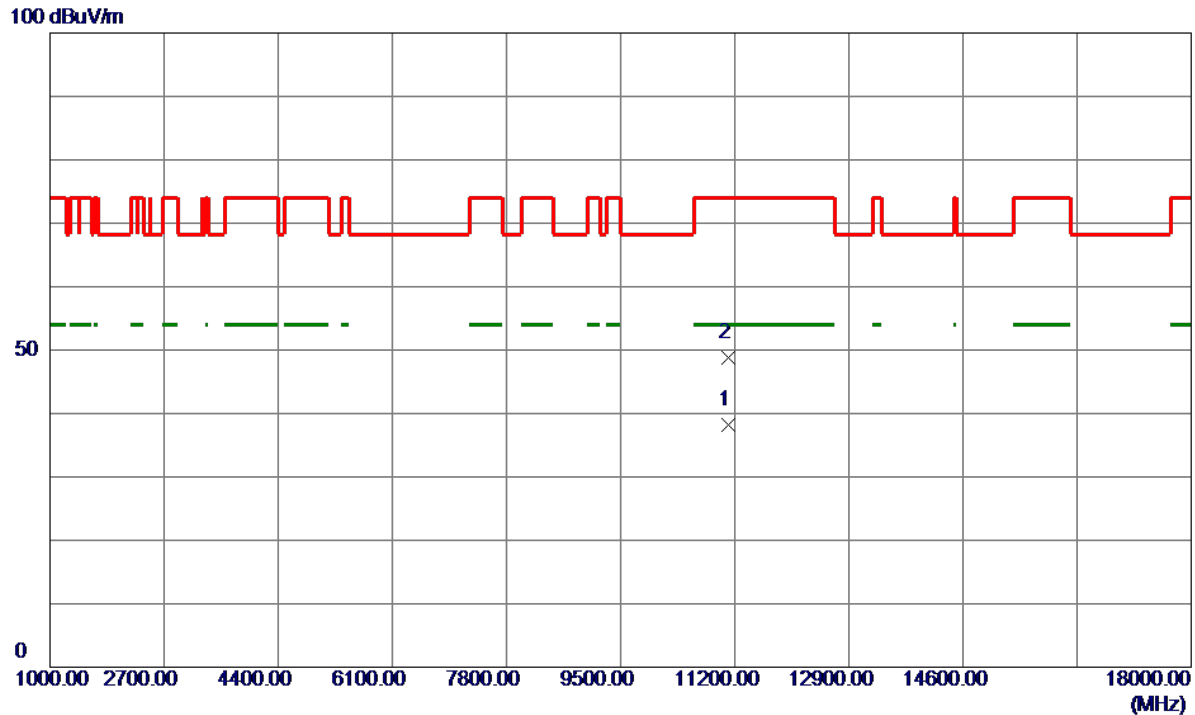


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11105.6000   | 26.02                      | 12.27                   | 38.29                     | 54.00           | -15.71       | AVG      |         |
| 2   | 11106.9500   | 36.57                      | 12.28                   | 48.85                     | 74.00           | -25.15       | Peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5670 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

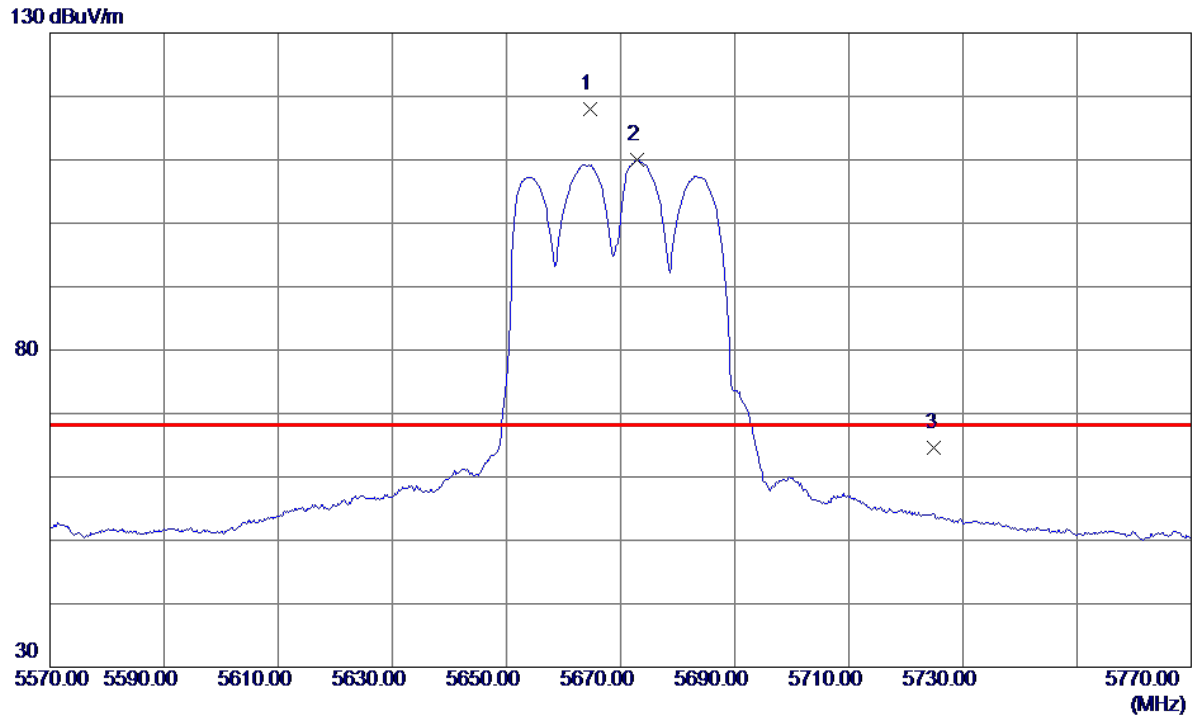


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5664.6000    | 100.74                     | 17.22                   | 117.96                    | 68.20           | 49.76        | Peak     | No Limit |
| 2   | 5672.8000    | 92.72                      | 17.24                   | 109.96                    | 999.00          | -889.04      | AVG      | No Limit |
| 3   | 5725.0000    | 47.17                      | 17.40                   | 64.57                     | 68.20           | -3.63        | Peak     |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5670 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

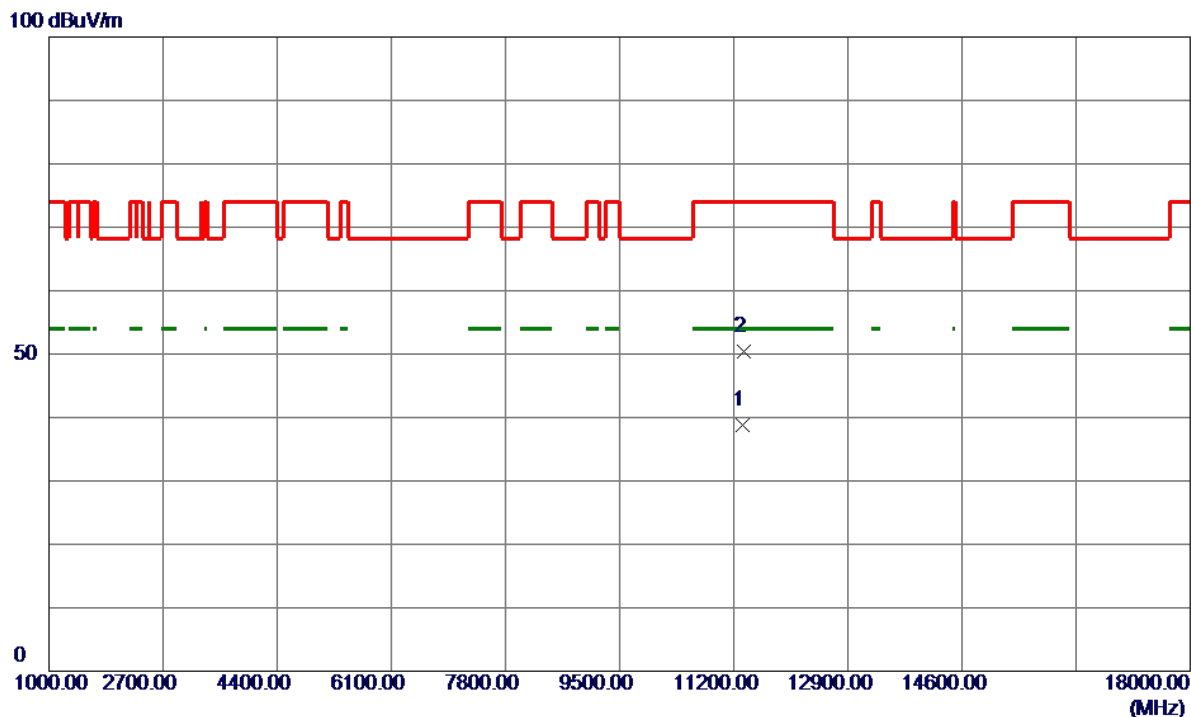


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11336.7500   | 25.46                      | 13.25                   | 38.71                     | 54.00           | -15.29       | AVG      |         |
| 2   | 11348.8500   | 37.08                      | 13.31                   | 50.39                     | 74.00           | -23.61       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5710 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

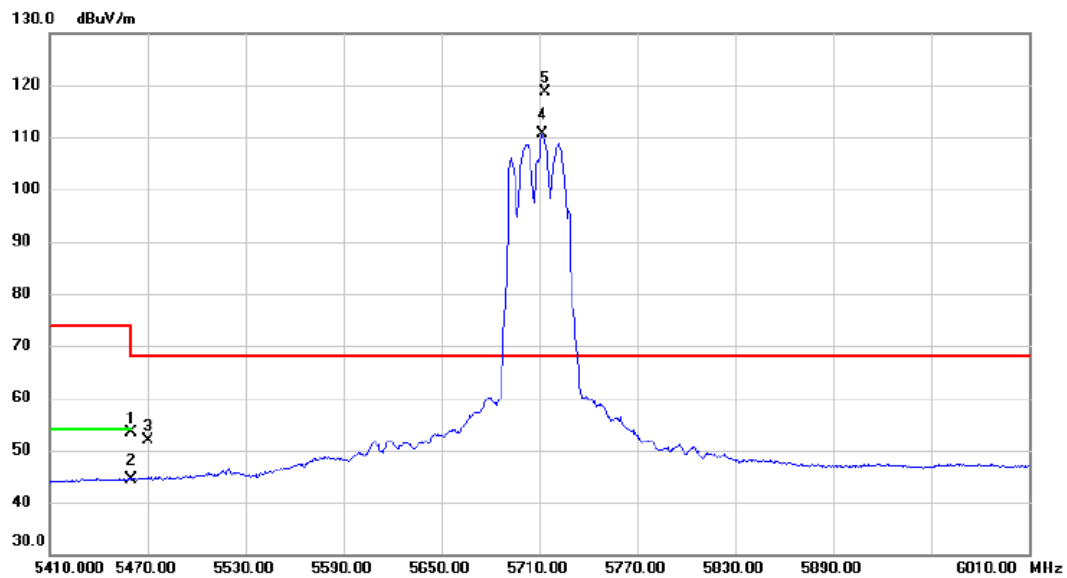


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5460.000     | 37.33                    | 16.01                   | 53.34                      | 74.00           | -20.66       | peak     |          |
| 2   |     | 5460.000     | 28.41                    | 16.01                   | 44.42                      | 54.00           | -9.58        | AVG      |          |
| 3   |     | 5470.000     | 35.85                    | 16.02                   | 51.87                      | 68.20           | -16.33       | peak     |          |
| 4   | X   | 5711.800     | 93.59                    | 17.01                   | 110.60                     | 68.20           | 42.40        | AVG      | No Limit |
| 5   | *   | 5713.600     | 101.64                   | 17.02                   | 118.66                     | 68.20           | 50.46        | peak     | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode 5710 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

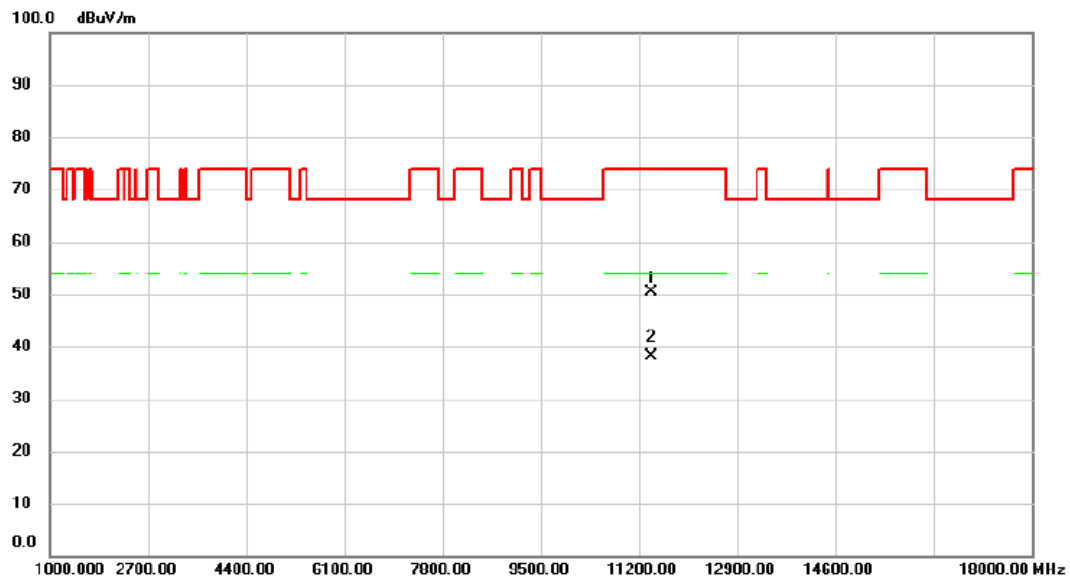


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11417.110    | 36.89                    | 13.60                   | 50.49                      | 74.00           | -23.51       | peak     |         |
| 2   | *   | 11424.640    | 24.47                    | 13.63                   | 38.10                      | 54.00           | -15.90       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5530 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

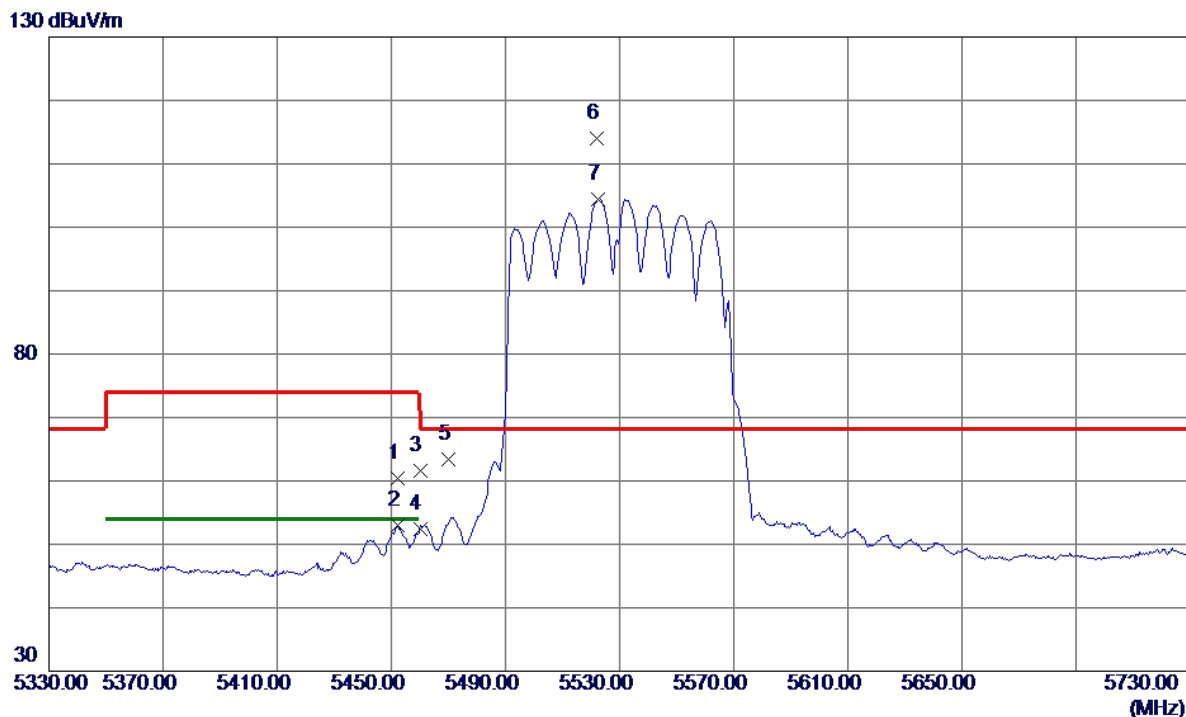


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5452.4000    | 44.44                      | 16.01                   | 60.45                     | 74.00           | -13.55       | Peak     |          |
| 2   | 5452.4000    | 36.95                      | 16.01                   | 52.96                     | 54.00           | -1.04        | AVG      |          |
| 3   | 5460.0000    | 45.66                      | 16.01                   | 61.67                     | 74.00           | -12.33       | Peak     |          |
| 4   | 5460.0000    | 36.41                      | 16.01                   | 52.42                     | 54.00           | -1.58        | AVG      |          |
| 5   | 5470.0000    | 47.36                      | 16.02                   | 63.38                     | 68.20           | -4.82        | Peak     |          |
| 6 * | 5522.0000    | 97.87                      | 16.13                   | 114.00                    | 68.20           | 45.80        | Peak     | No Limit |
| 7   | 5522.4000    | 88.28                      | 16.13                   | 104.41                    | 999.00          | -894.59      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5530 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

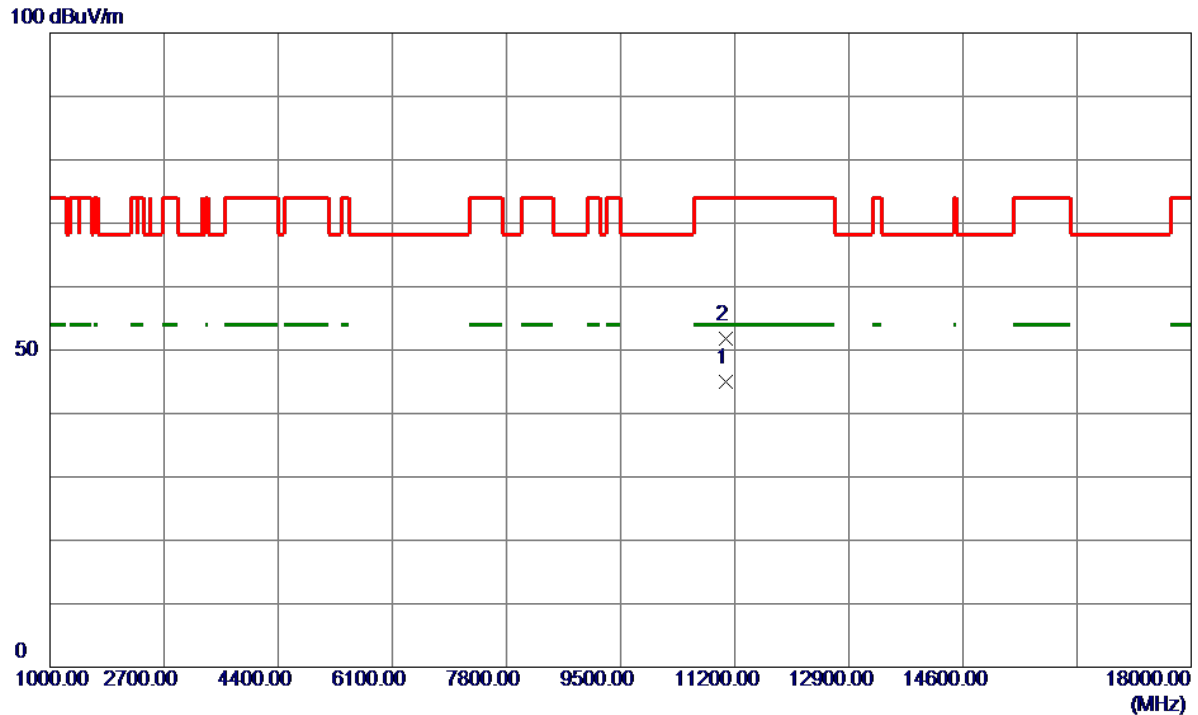


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11060.0000   | 32.82                      | 12.08                   | 44.90                     | 54.00           | -9.10        | AVG      |         |
| 2   | 11060.1000   | 39.62                      | 12.08                   | 51.70                     | 74.00           | -22.30       | Peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5610 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

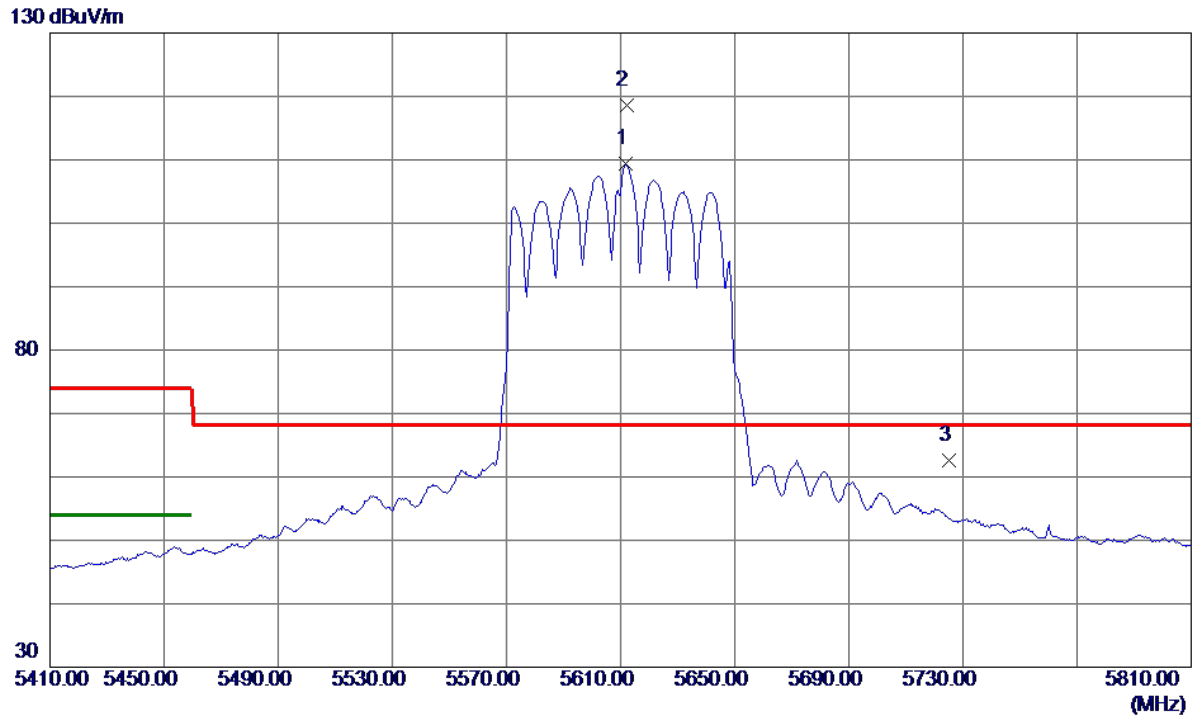


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5611.6000    | 92.87                      | 16.55                   | 109.42                    | 999.00          | -889.58      | AVG      | No Limit |
| 2 * | 5612.0000    | 102.10                     | 16.55                   | 118.65                    | 68.20           | 50.45        | Peak     | No Limit |
| 3   | 5725.0000    | 45.45                      | 17.07                   | 62.52                     | 68.20           | -5.68        | Peak     |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5610 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

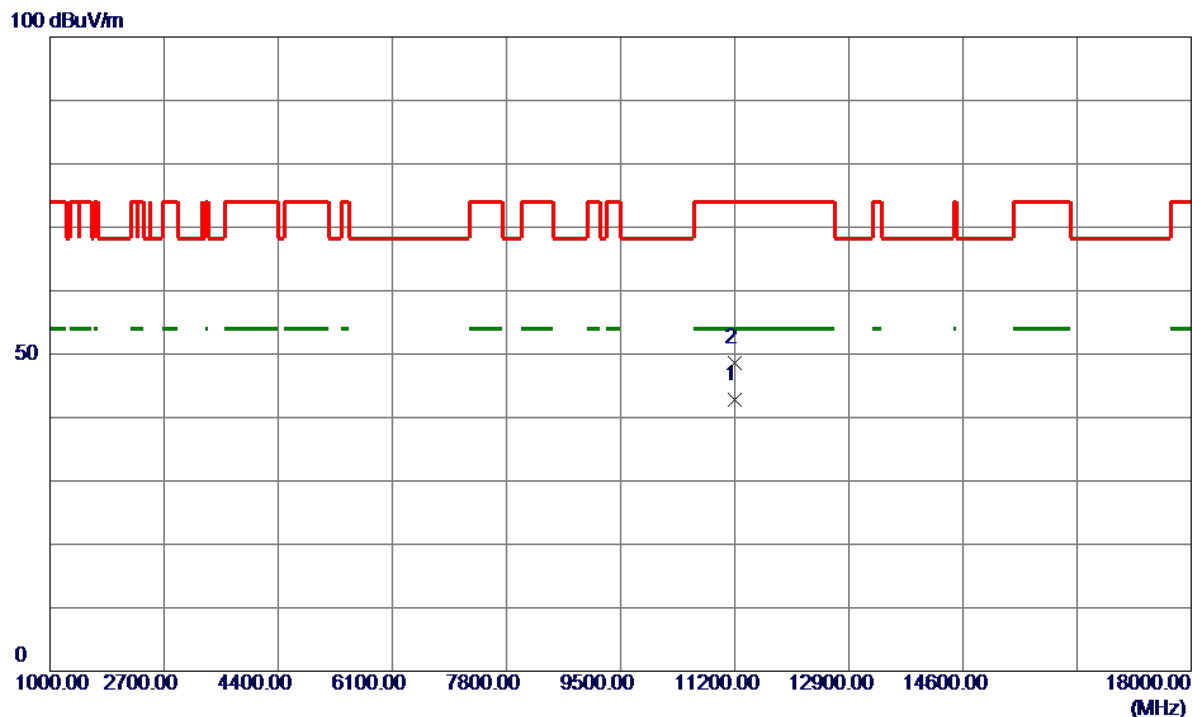


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11203.6000   | 30.17                      | 12.69                   | 42.86                     | 54.00           | -11.14       | AVG      |         |
| 2   | 11206.3000   | 35.84                      | 12.70                   | 48.54                     | 74.00           | -25.46       | Peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5690 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

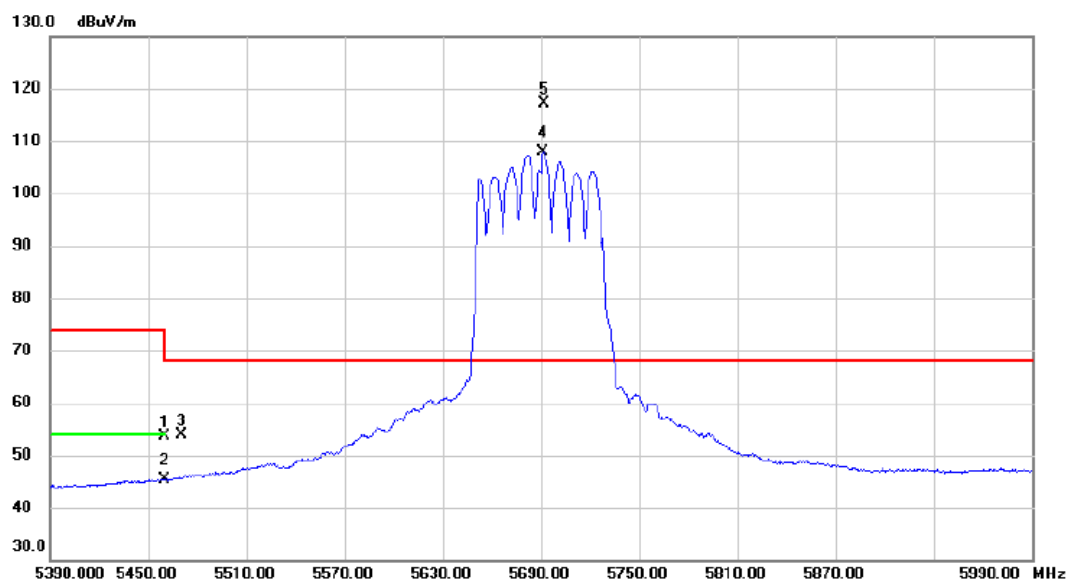


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5460.000     | 37.55                    | 16.01                   | 53.56                      | 74.00           | -20.44       | peak     |          |
| 2   |     | 5460.000     | 29.36                    | 16.01                   | 45.37                      | 54.00           | -8.63        | AVG      |          |
| 3   |     | 5470.000     | 37.92                    | 16.02                   | 53.94                      | 68.20           | -14.26       | peak     |          |
| 4   | X   | 5691.200     | 90.97                    | 16.92                   | 107.89                     | 68.20           | 39.69        | AVG      | No Limit |
| 5   | *   | 5692.400     | 100.09                   | 16.92                   | 117.01                     | 68.20           | 48.81        | peak     | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5690 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

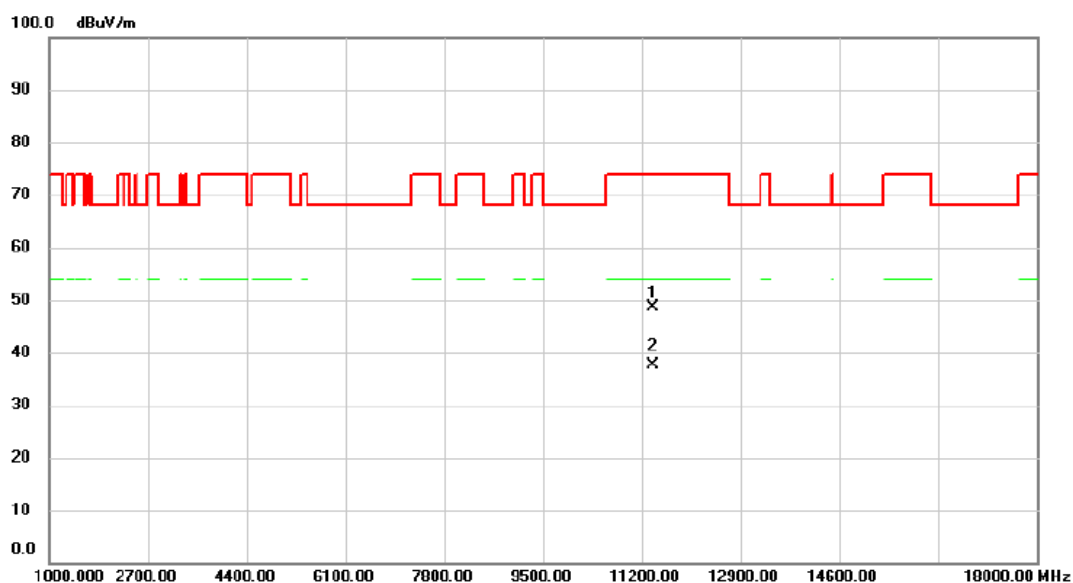


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11382.630    | 35.29                    | 13.45                   | 48.74                      | 74.00           | -25.26       | peak     |         |
| 2   | *   | 11382.690    | 24.17                    | 13.45                   | 37.62                      | 54.00           | -16.38       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                     |              |          |
|-----------|-------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT160) Mode 5570 MHz | Polarization | Vertical |
|-----------|-------------------------------------|--------------|----------|

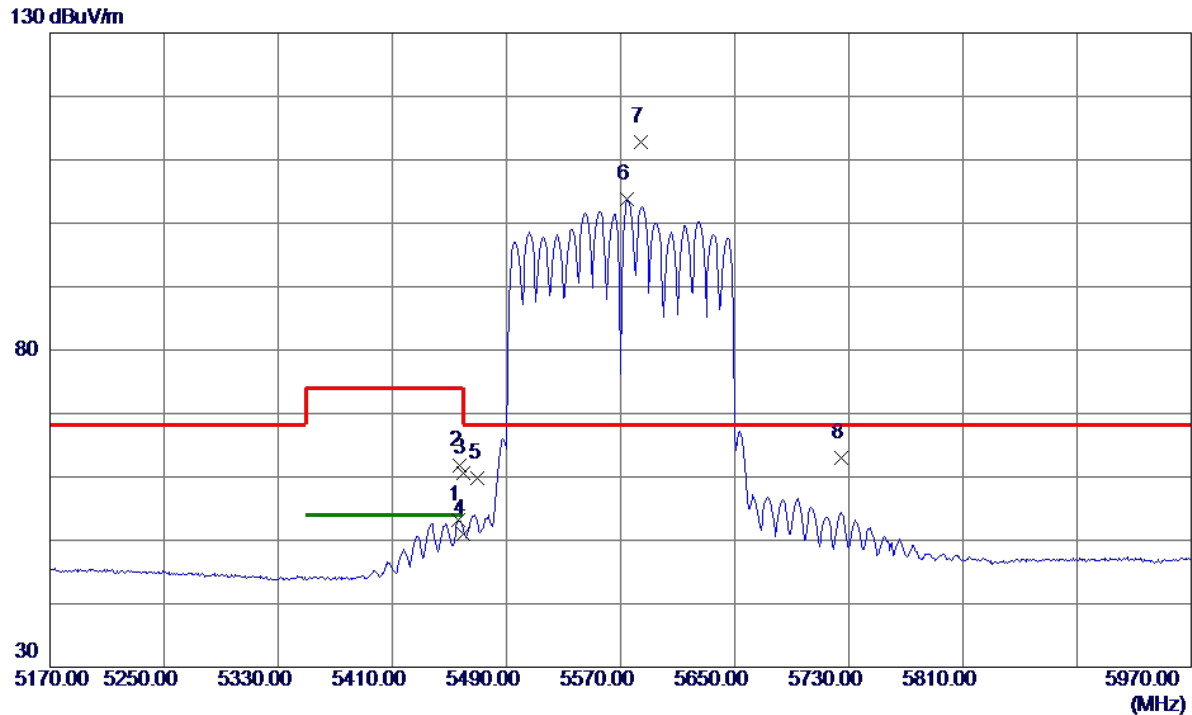


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5456.4000    | 37.15                      | 16.01                   | 53.16                     | 54.00           | -0.84        | AVG      |          |
| 2   | 5457.4000    | 45.88                      | 16.01                   | 61.89                     | 74.00           | -12.11       | Peak     |          |
| 3   | 5460.0000    | 44.59                      | 16.01                   | 60.60                     | 74.00           | -13.40       | Peak     |          |
| 4   | 5460.0000    | 34.93                      | 16.01                   | 50.94                     | 54.00           | -3.06        | AVG      |          |
| 5   | 5470.0000    | 43.77                      | 16.02                   | 59.79                     | 68.20           | -8.41        | Peak     |          |
| 6   | 5574.8000    | 87.42                      | 16.38                   | 103.80                    | 999.00          | -895.20      | AVG      | No Limit |
| 7 * | 5584.4000    | 96.39                      | 16.42                   | 112.81                    | 68.20           | 44.61        | Peak     | No Limit |
| 8   | 5725.0000    | 46.01                      | 17.07                   | 63.08                     | 68.20           | -5.12        | Peak     |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                     |              |          |
|-----------|-------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT160) Mode 5570 MHz | Polarization | Vertical |
|-----------|-------------------------------------|--------------|----------|

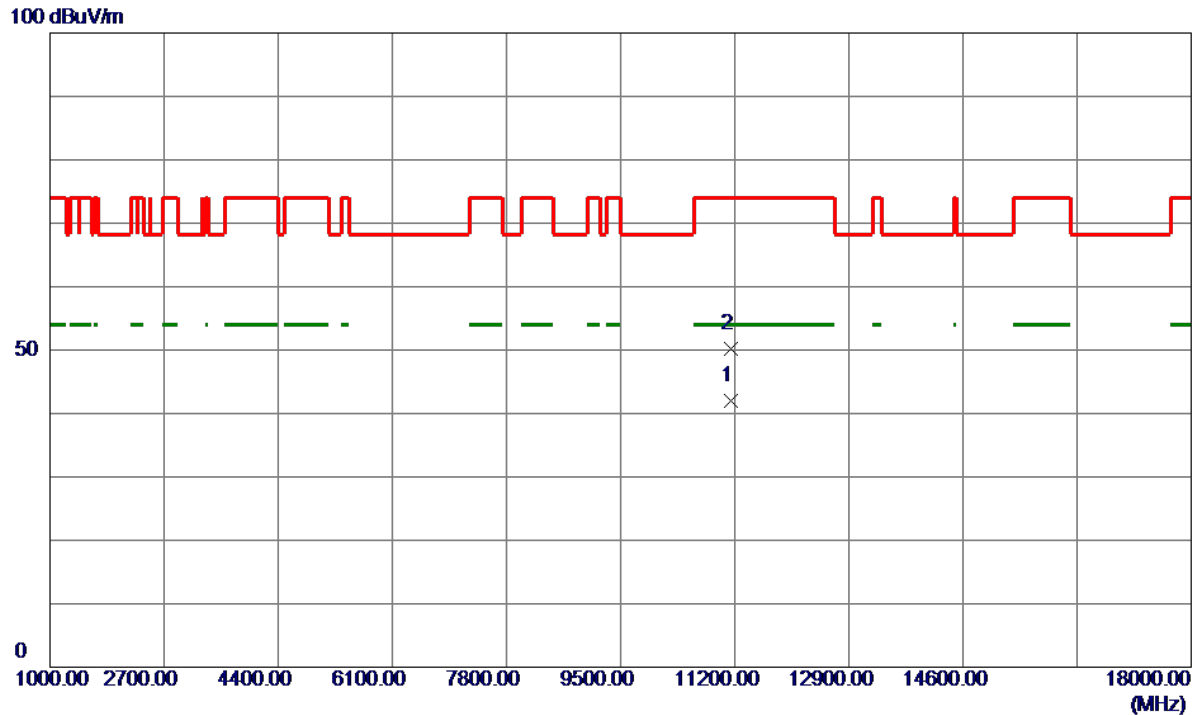


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11139.9800   | 29.57                      | 12.42                   | 41.99                     | 54.00           | -12.01       | AVG      |         |
| 2   | 11140.4800   | 37.70                      | 12.42                   | 50.12                     | 74.00           | -23.88       | Peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5500 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

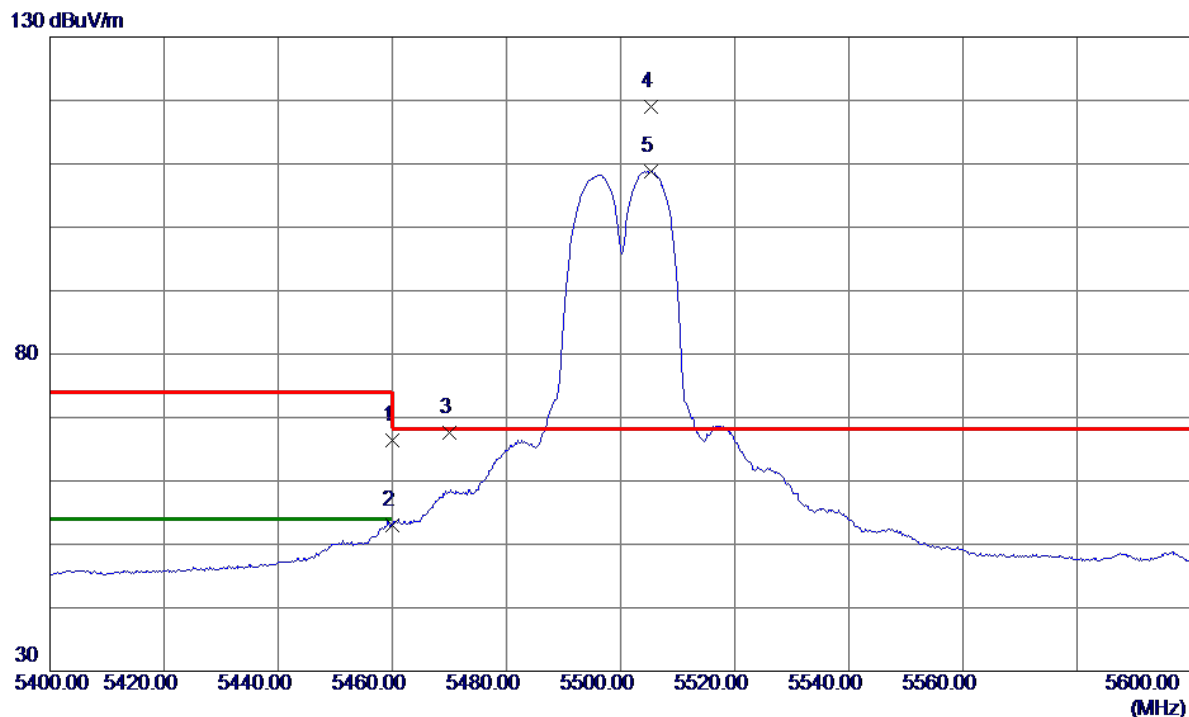


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 50.32                      | 16.01                   | 66.33                     | 74.00           | -7.67        | Peak     |          |
| 2   | 5460.0000    | 37.01                      | 16.01                   | 53.02                     | 54.00           | -0.98        | AVG      |          |
| 3   | 5470.0000    | 51.64                      | 16.02                   | 67.66                     | 68.20           | -0.54        | Peak     |          |
| 4 * | 5505.4000    | 102.94                     | 16.06                   | 119.00                    | 68.20           | 50.80        | Peak     | No Limit |
| 5   | 5505.4000    | 92.73                      | 16.06                   | 108.79                    | 999.00          | -890.21      | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5500 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

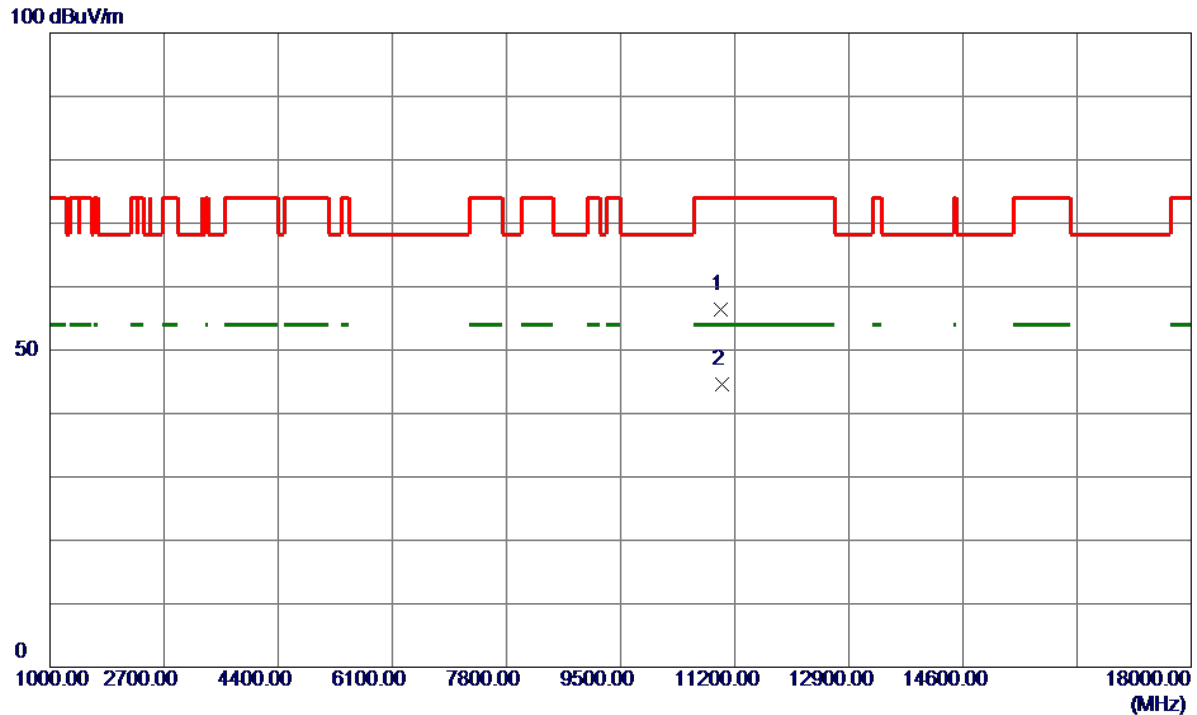


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10993.5000   | 44.55                      | 11.81                   | 56.36                     | 74.00           | -17.64       | Peak     |         |
| 2 * | 11002.6000   | 32.78                      | 11.83                   | 44.61                     | 54.00           | -9.39        | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5580 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

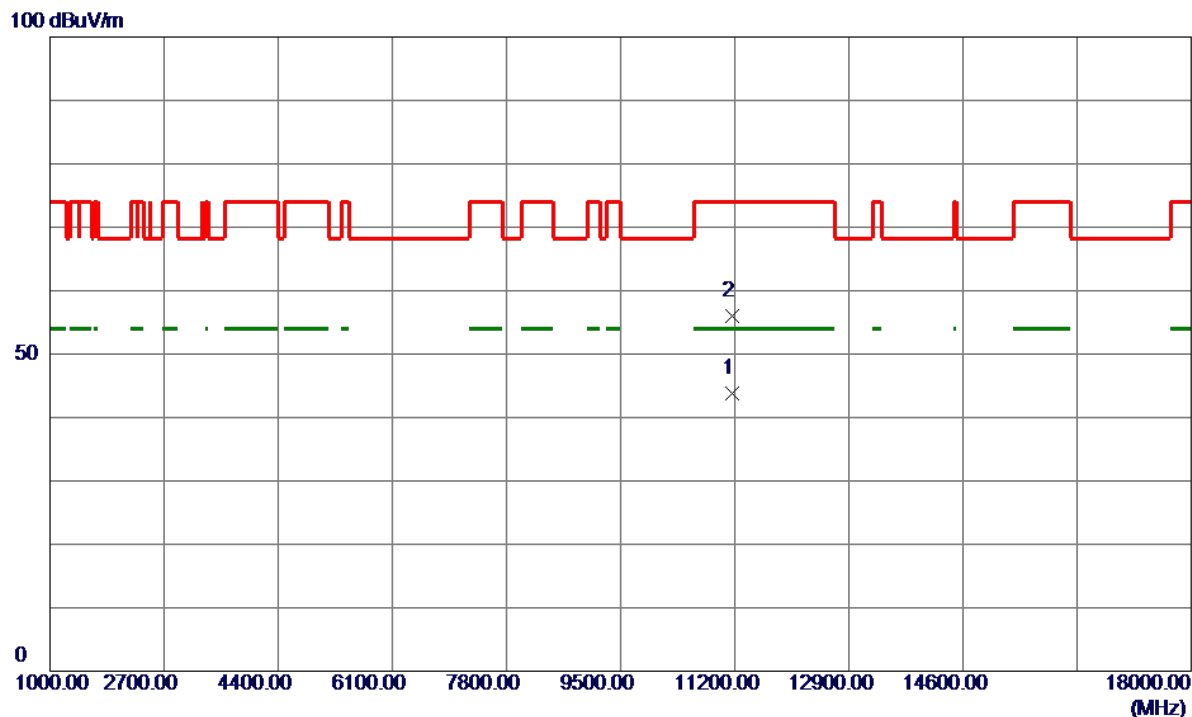


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11163.1000   | 31.36                      | 12.51                   | 43.87                     | 54.00           | -10.13       | AVG      |         |
| 2   | 11163.6000   | 43.50                      | 12.52                   | 56.02                     | 74.00           | -17.98       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5700 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

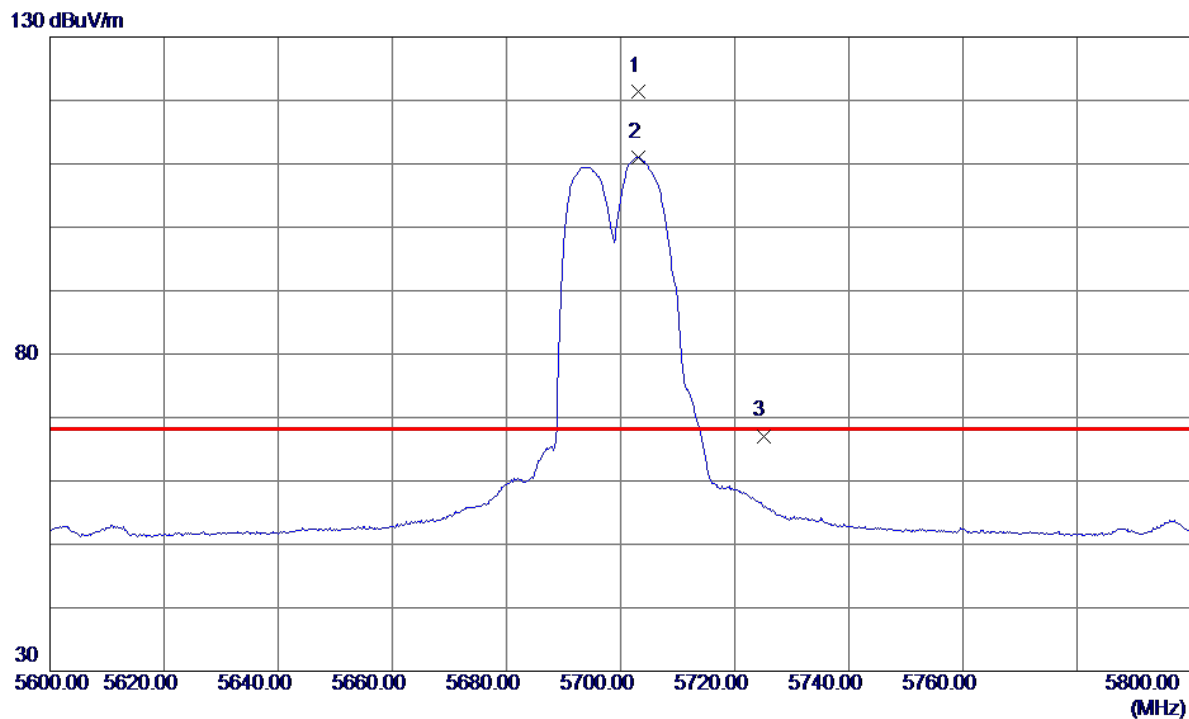

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5703.2000    | 103.98                     | 17.33                   | 121.31                    | 68.20           | 53.11        | Peak     | No Limit |
| 2   | 5703.2000    | 93.74                      | 17.33                   | 111.07                    | 999.00          | -887.93      | AVG      | No Limit |
| 3   | 5725.0000    | 49.70                      | 17.40                   | 67.10                     | 68.20           | -1.10        | Peak     |          |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5700 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

100 dBuV/m

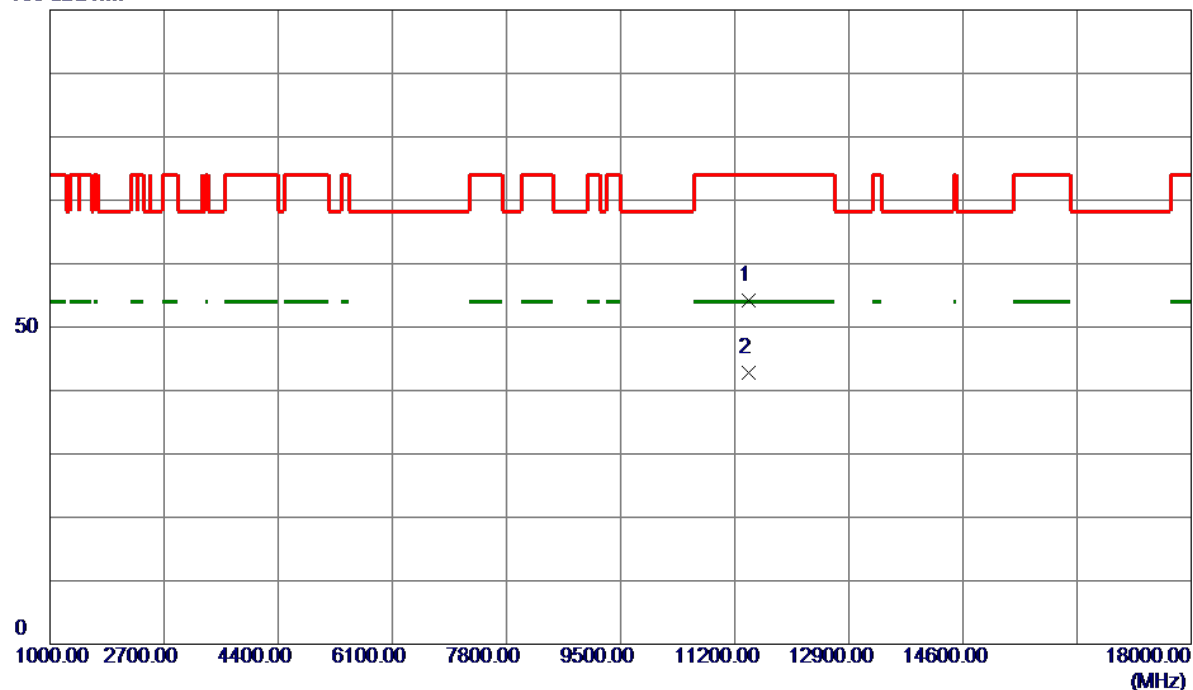


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11400.8500   | 40.66                      | 13.53                   | 54.19                     | 74.00           | -19.81       | Peak     |         |
| 2 * | 11401.9500   | 29.32                      | 13.53                   | 42.85                     | 54.00           | -11.15       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5720MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

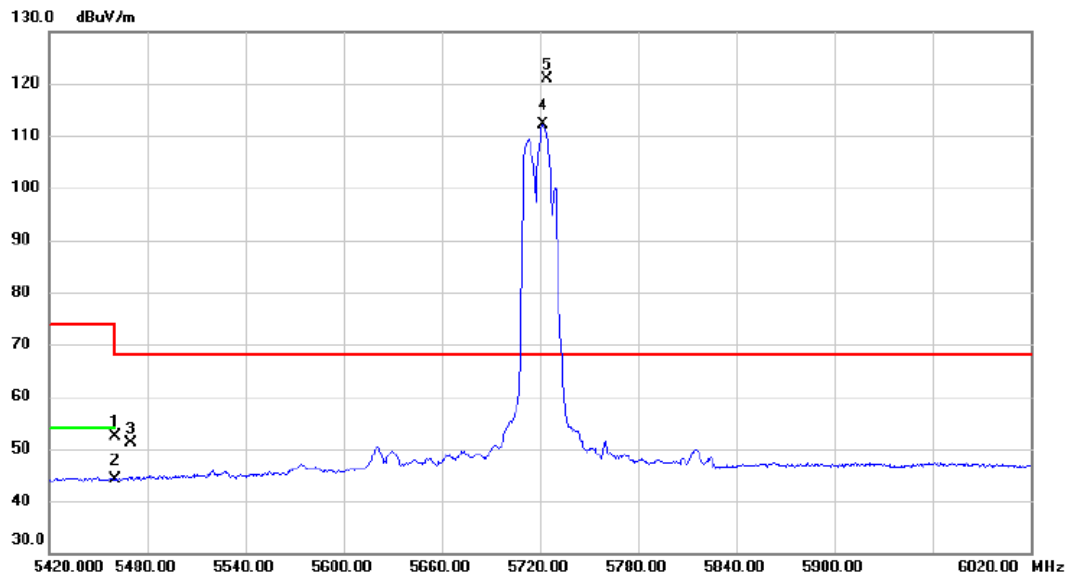


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5460.000     | 36.28                    | 16.01                   | 52.29                      | 74.00           | -21.71       | peak     |          |
| 2   |     | 5460.000     | 28.22                    | 16.01                   | 44.23                      | 54.00           | -9.77        | AVG      |          |
| 3   |     | 5470.000     | 35.04                    | 16.02                   | 51.06                      | 68.20           | -17.14       | peak     |          |
| 4   | X   | 5722.400     | 95.08                    | 17.07                   | 112.15                     | 68.20           | 43.95        | AVG      | No Limit |
| 5   | *   | 5724.200     | 103.76                   | 17.07                   | 120.83                     | 68.20           | 52.63        | peak     | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5720 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

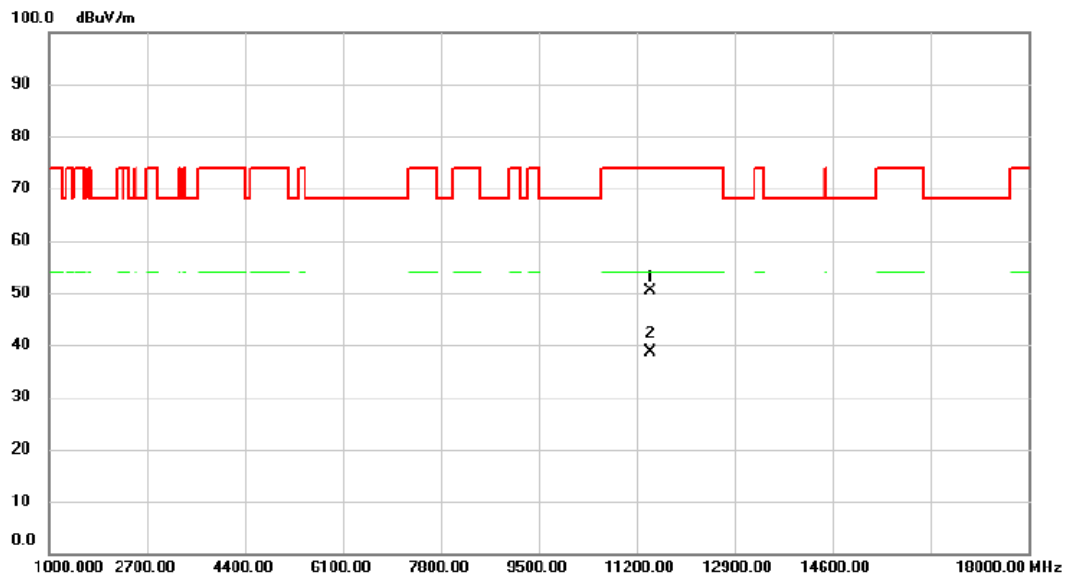


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11440.750    | 36.68                    | 13.69                   | 50.37                      | 74.00           | -23.63       | peak     |         |
| 2   | *   | 11441.080    | 24.96                    | 13.70                   | 38.66                      | 54.00           | -15.34       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5510 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

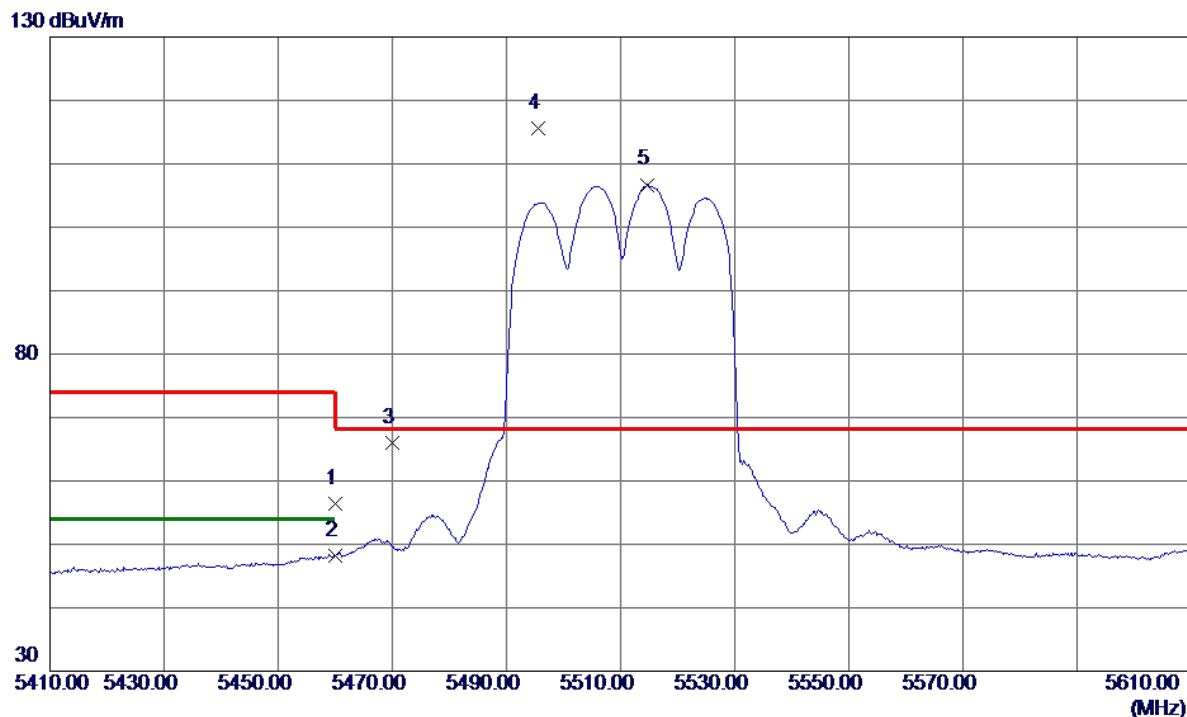


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 40.30                      | 16.01                   | 56.31                     | 74.00           | -17.69       | Peak     |          |
| 2   | 5460.0000    | 32.27                      | 16.01                   | 48.28                     | 54.00           | -5.72        | AVG      |          |
| 3   | 5470.0000    | 49.93                      | 16.02                   | 65.95                     | 68.20           | -2.25        | Peak     |          |
| 4 * | 5495.6000    | 99.50                      | 16.03                   | 115.53                    | 68.20           | 47.33        | Peak     | No Limit |
| 5   | 5514.6000    | 90.60                      | 16.10                   | 106.70                    | 999.00          | -892.30      | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5510 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

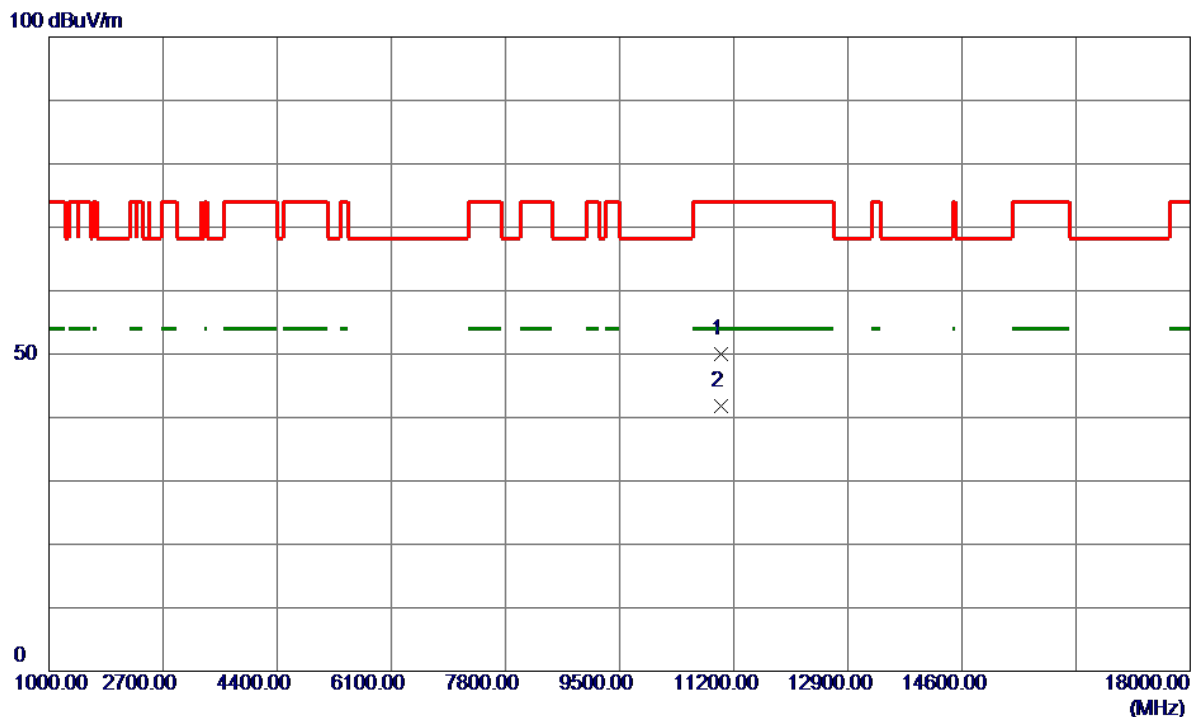


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11011.2000   | 38.08                      | 11.87                   | 49.95                     | 74.00           | -24.05       | Peak     |         |
| 2 * | 11019.9000   | 29.93                      | 11.90                   | 41.83                     | 54.00           | -12.17       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5550 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

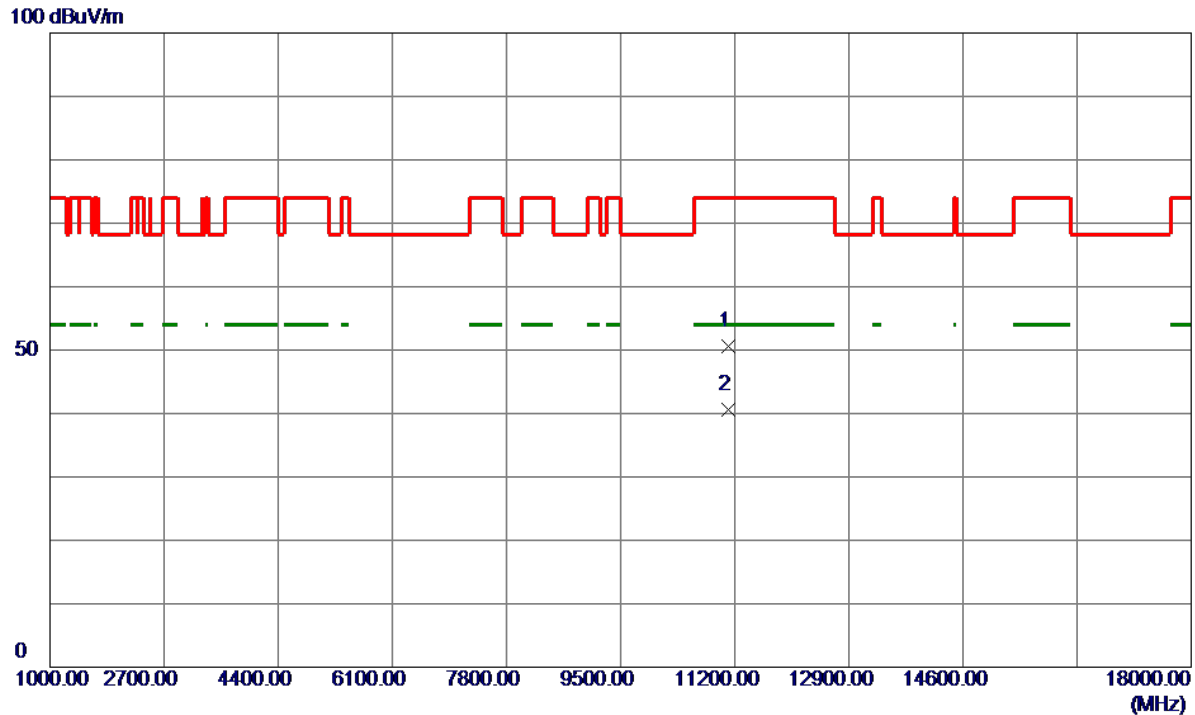


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11100.1000   | 38.27                      | 12.25                   | 50.52                     | 74.00           | -23.48       | Peak     |         |
| 2 * | 11100.1000   | 28.35                      | 12.25                   | 40.60                     | 54.00           | -13.40       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5670 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

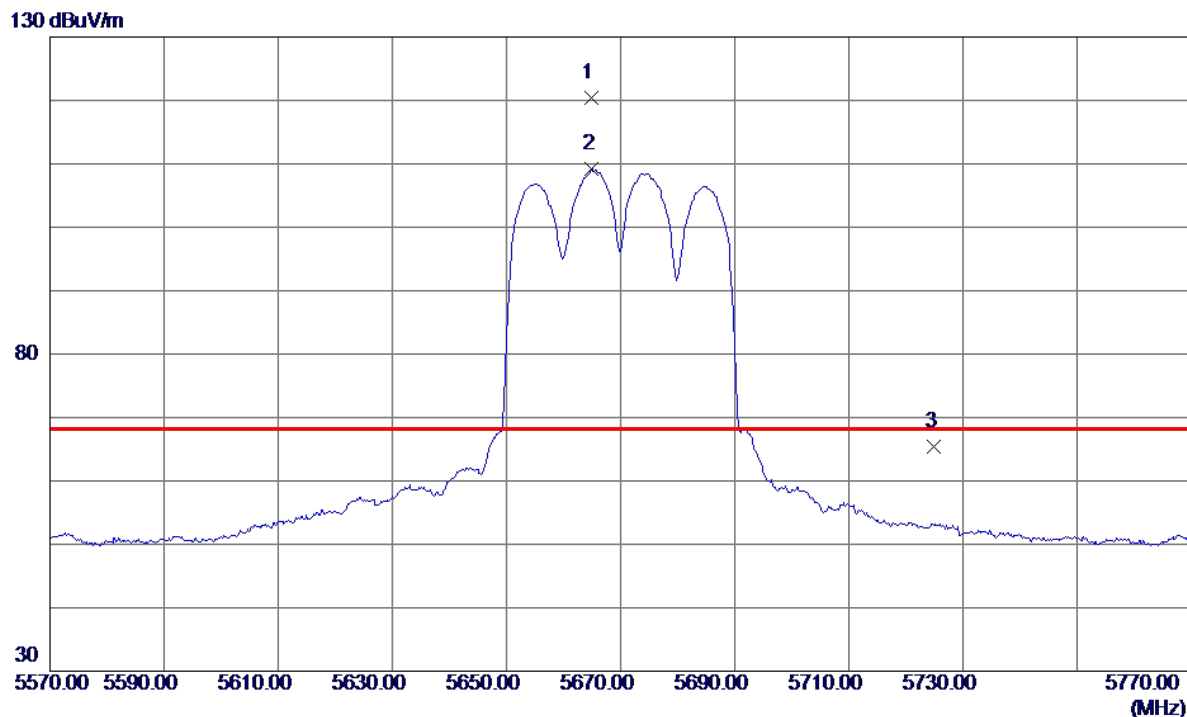


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5664.8000    | 103.59                     | 16.79                   | 120.38                    | 68.20           | 52.18        | Peak     | No Limit |
| 2   | 5665.0000    | 92.38                      | 16.80                   | 109.18                    | 999.00          | -889.82      | AVG      | No Limit |
| 3   | 5725.0000    | 48.39                      | 17.07                   | 65.46                     | 68.20           | -2.74        | Peak     |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5670 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

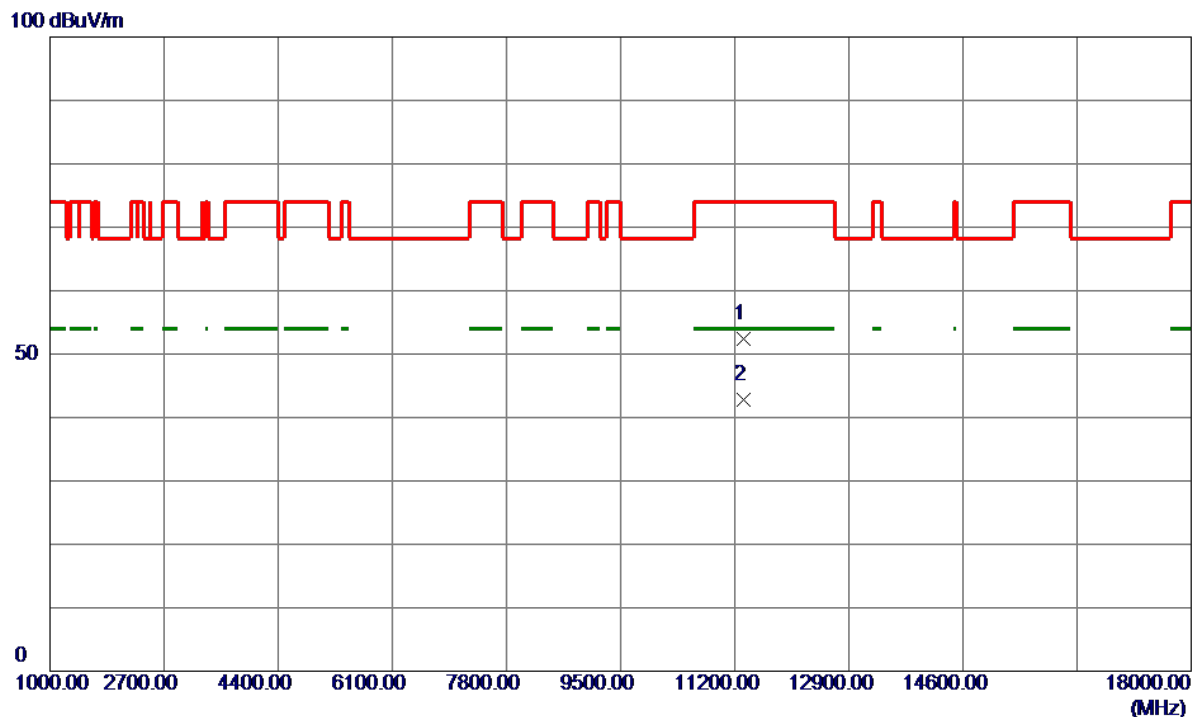


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11332.9000   | 39.25                      | 13.24                   | 52.49                     | 74.00           | -21.51       | Peak     |         |
| 2 * | 11339.8000   | 29.52                      | 13.27                   | 42.79                     | 54.00           | -11.21       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5710 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

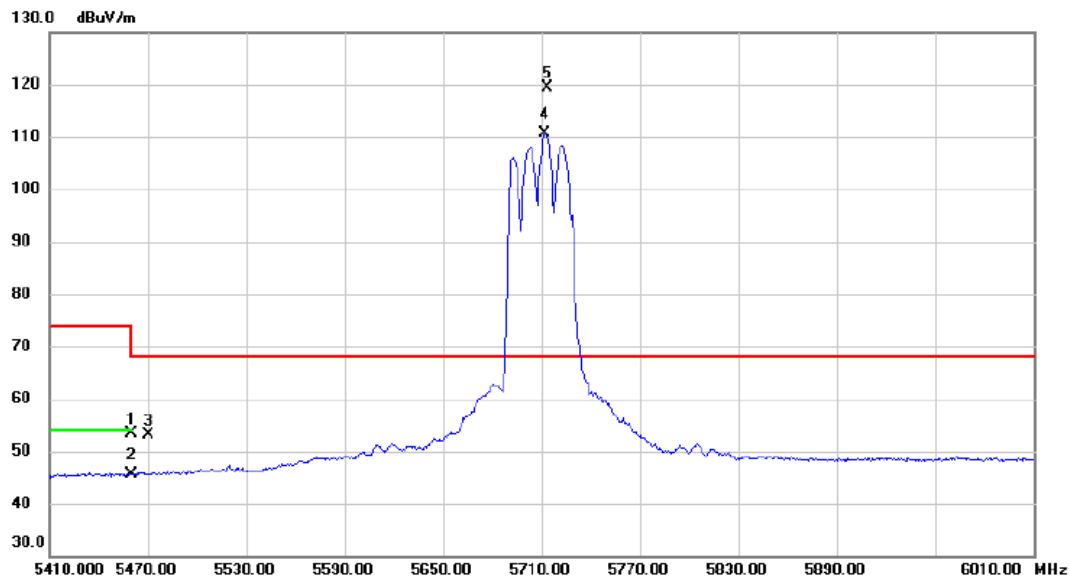


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5460.000     | 37.42                    | 16.01                   | 53.43                      | 74.00           | -20.57       | peak     |          |
| 2   |     | 5460.000     | 29.64                    | 16.01                   | 45.65                      | 54.00           | -8.35        | AVG      |          |
| 3   |     | 5470.000     | 37.14                    | 16.02                   | 53.16                      | 68.20           | -15.04       | peak     |          |
| 4   | X   | 5712.400     | 93.57                    | 17.01                   | 110.58                     | 68.20           | 42.38        | AVG      | No Limit |
| 5   | *   | 5713.600     | 102.36                   | 17.02                   | 119.38                     | 68.20           | 51.18        | peak     | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5710 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

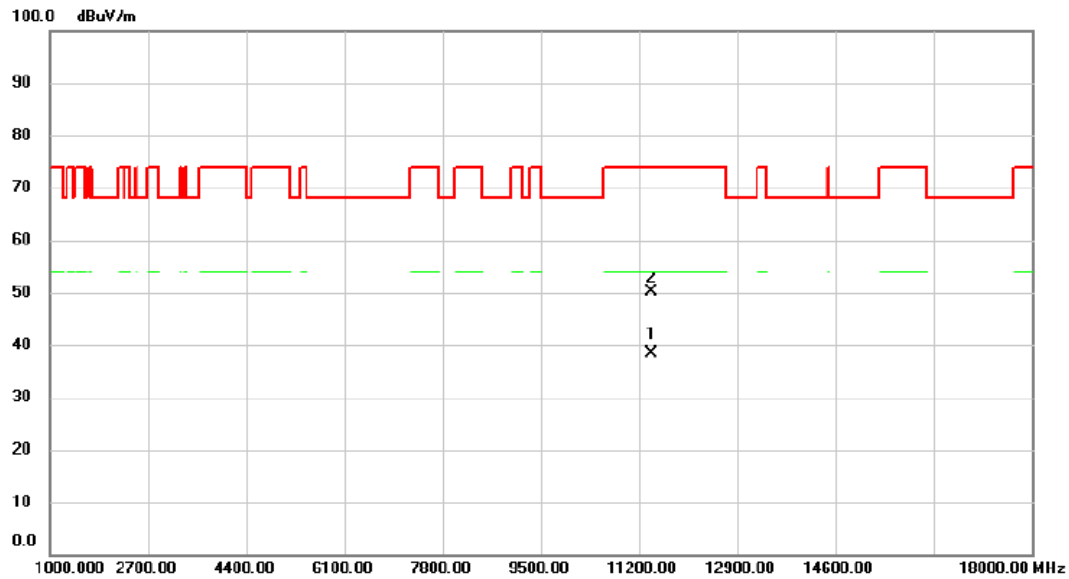


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 11417.950    | 24.76                    | 13.60                   | 38.36                      | 54.00           | -15.64       | AVG      |         |
| 2   |     | 11419.410    | 36.53                    | 13.60                   | 50.13                      | 74.00           | -23.87       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5530 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

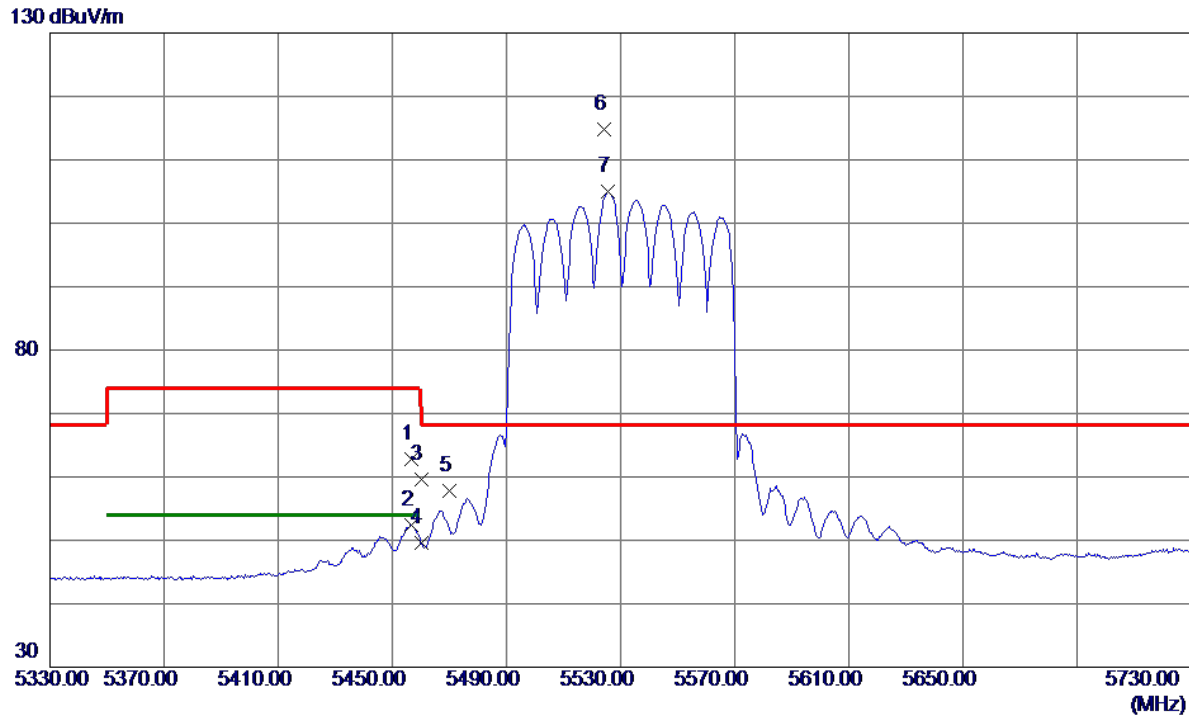


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5456.8000    | 46.74                      | 16.01                   | 62.75                     | 74.00           | -11.25       | Peak     |          |
| 2   | 5456.8000    | 36.43                      | 16.01                   | 52.44                     | 54.00           | -1.56        | AVG      |          |
| 3   | 5460.0000    | 43.54                      | 16.01                   | 59.55                     | 74.00           | -14.45       | Peak     |          |
| 4   | 5460.0000    | 33.68                      | 16.01                   | 49.69                     | 54.00           | -4.31        | AVG      |          |
| 5   | 5470.0000    | 41.81                      | 16.02                   | 57.83                     | 68.20           | -10.37       | Peak     |          |
| 6 * | 5524.4000    | 98.61                      | 16.14                   | 114.75                    | 68.20           | 46.55        | Peak     | No Limit |
| 7   | 5525.6000    | 88.77                      | 16.15                   | 104.92                    | 999.00          | -894.08      | AVG      | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5530 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

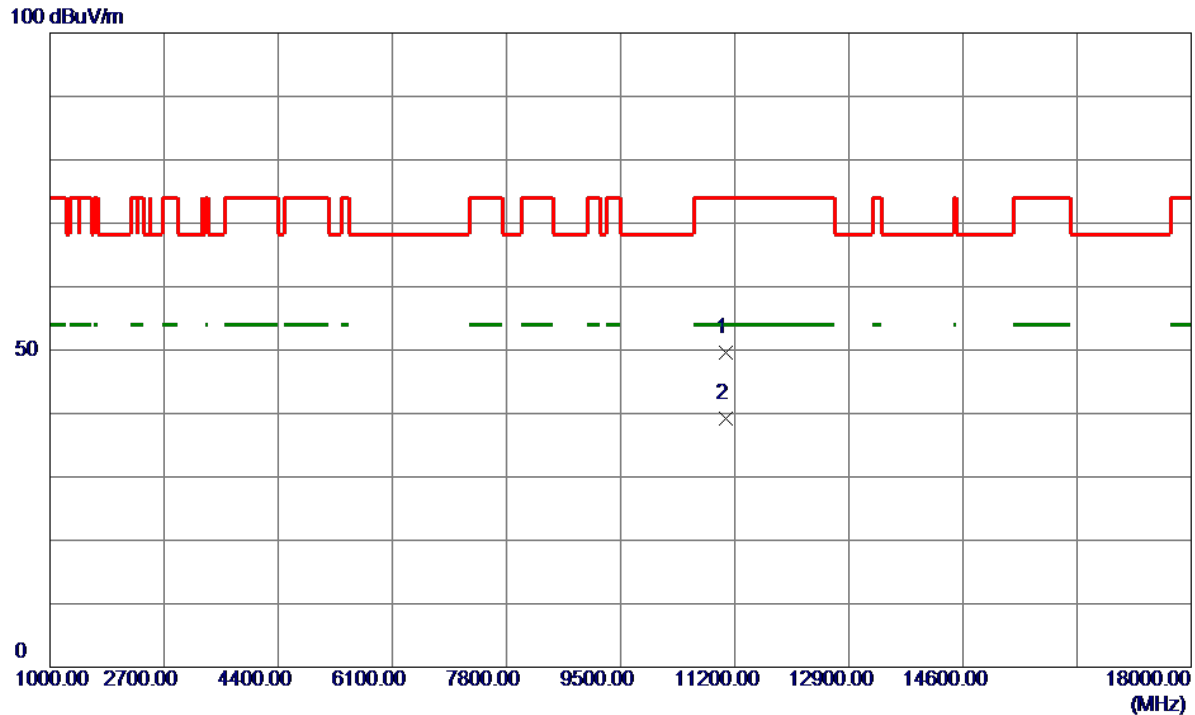


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11061.3000   | 37.44                      | 12.08                   | 49.52                     | 74.00           | -24.48       | Peak     |         |
| 2 * | 11069.8000   | 27.06                      | 12.12                   | 39.18                     | 54.00           | -14.82       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5610 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

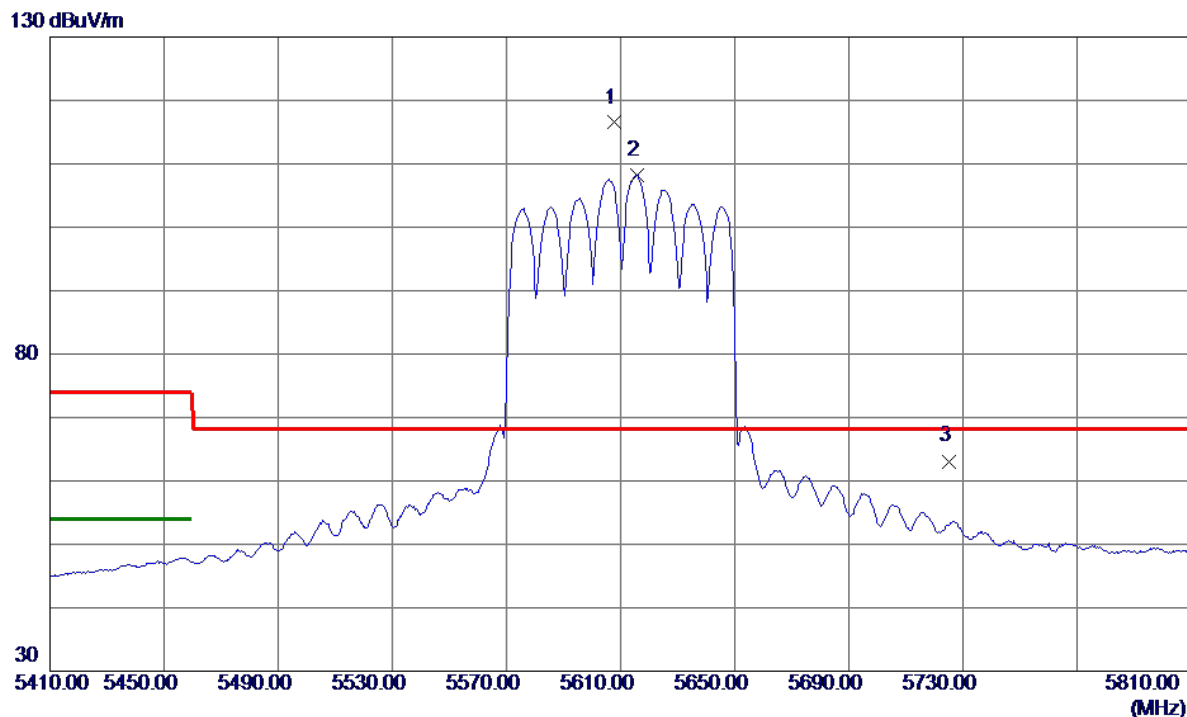


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5607.6000    | 99.97                      | 16.53                   | 116.50                    | 68.20           | 48.30        | Peak     | No Limit |
| 2   | 5615.6000    | 91.59                      | 16.57                   | 108.16                    | 999.00          | -890.84      | AVG      | No Limit |
| 3   | 5725.0000    | 46.03                      | 17.07                   | 63.10                     | 68.20           | -5.10        | Peak     |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5610 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

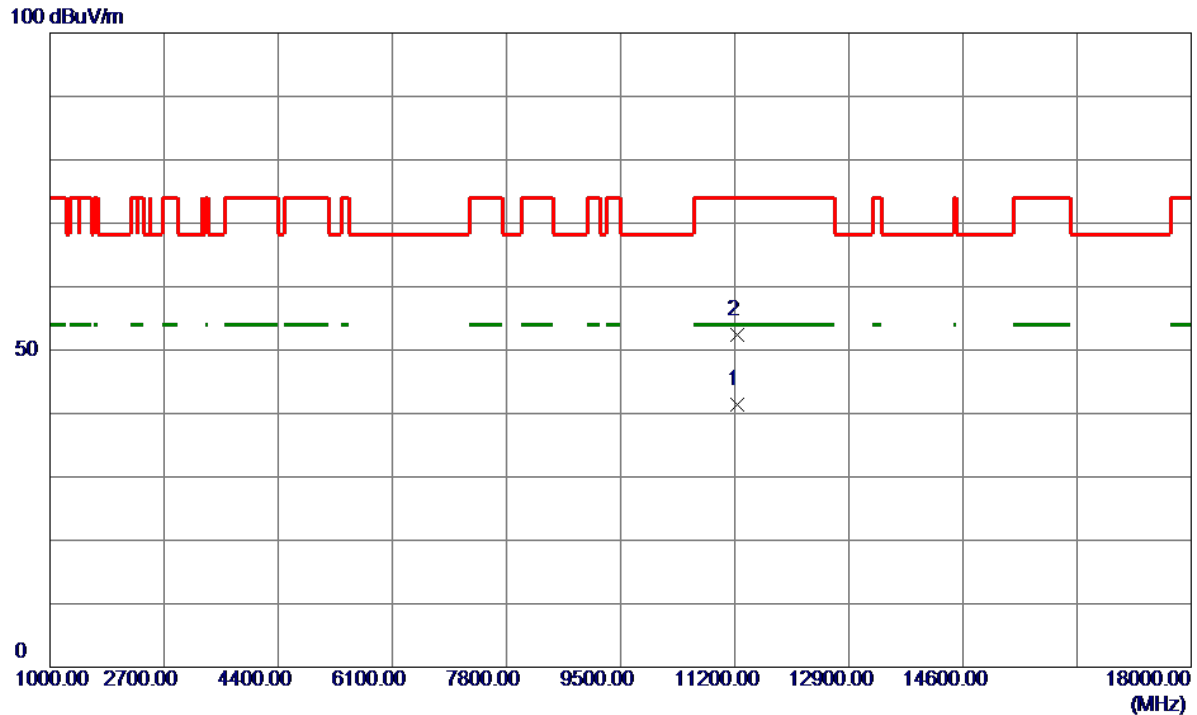


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11229.4000   | 28.51                      | 12.80                   | 41.31                     | 54.00           | -12.69       | AVG      |         |
| 2   | 11230.6000   | 39.63                      | 12.80                   | 52.43                     | 74.00           | -21.57       | Peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5690 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

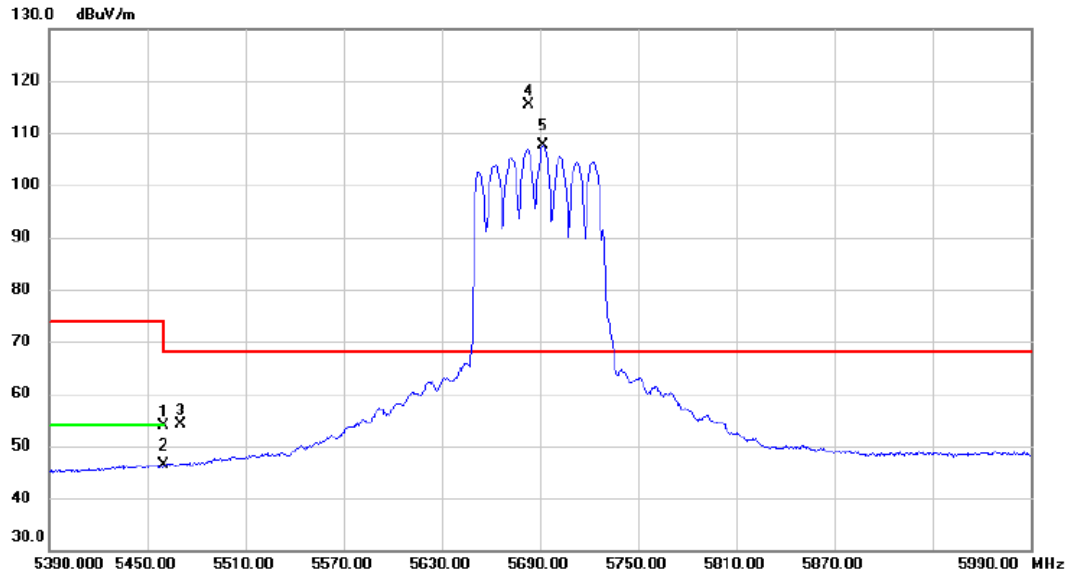


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|----------|
| 1   |     | 5460.000     | 37.82                    | 16.01                   | 53.83                      | 74.00           | -20.17       | peak     |          |
| 2   |     | 5460.000     | 30.29                    | 16.01                   | 46.30                      | 54.00           | -7.70        | AVG      |          |
| 3   |     | 5470.000     | 38.20                    | 16.02                   | 54.22                      | 68.20           | -13.98       | peak     |          |
| 4   | *   | 5683.400     | 98.51                    | 16.89                   | 115.40                     | 68.20           | 47.20        | peak     | No Limit |
| 5   | X   | 5692.400     | 90.71                    | 16.92                   | 107.63                     | 68.20           | 39.43        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5690 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

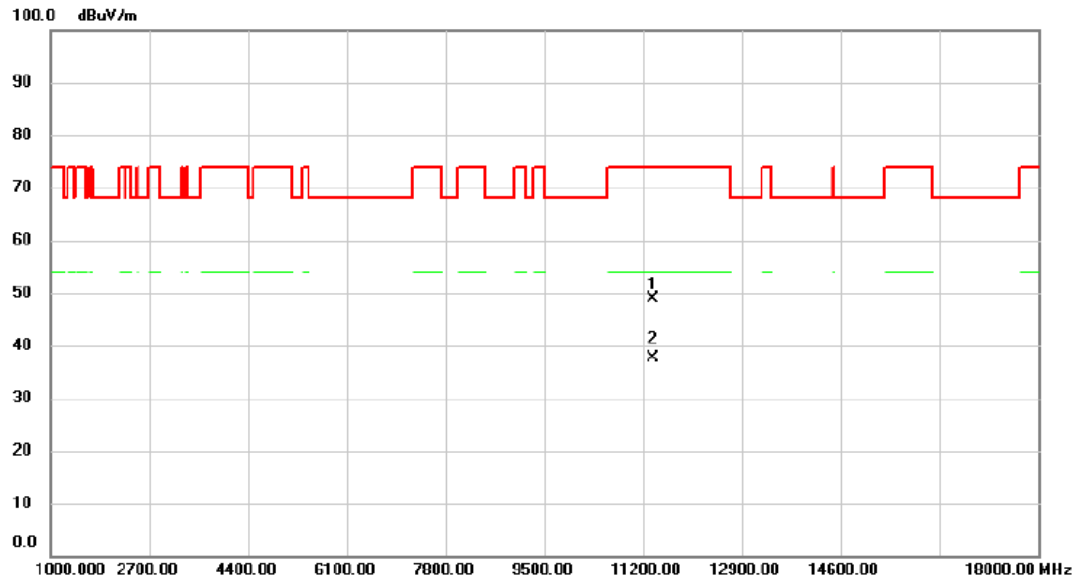


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11380.480    | 35.43                    | 13.45                   | 48.88                      | 74.00           | -25.12       | peak     |         |
| 2   | *   | 11380.870    | 24.19                    | 13.45                   | 37.64                      | 54.00           | -16.36       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE160) Mode 5570 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

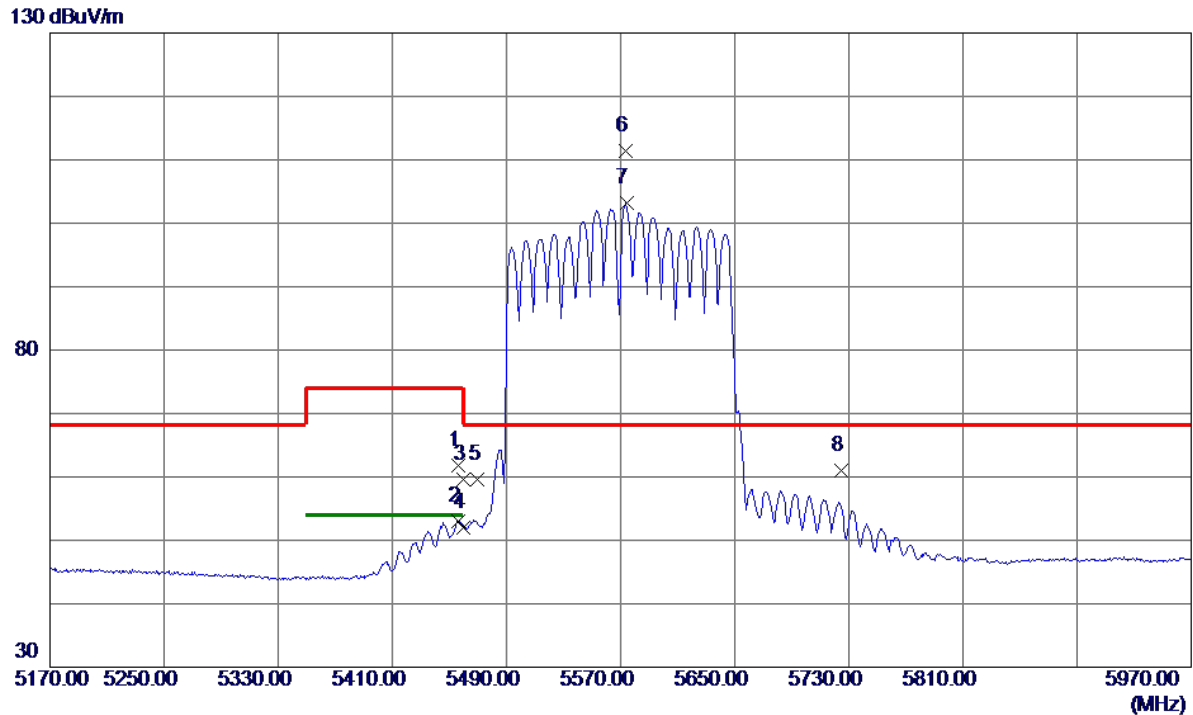


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5456.4000    | 45.71                      | 16.01                   | 61.72                     | 74.00           | -12.28       | Peak     |          |
| 2   | 5456.4000    | 36.96                      | 16.01                   | 52.97                     | 54.00           | -1.03        | AVG      |          |
| 3   | 5460.0000    | 43.63                      | 16.01                   | 59.64                     | 74.00           | -14.36       | Peak     |          |
| 4   | 5460.0000    | 36.03                      | 16.01                   | 52.04                     | 54.00           | -1.96        | AVG      |          |
| 5   | 5470.0000    | 43.59                      | 16.02                   | 59.61                     | 68.20           | -8.59        | Peak     |          |
| 6 * | 5573.2000    | 95.03                      | 16.37                   | 111.40                    | 68.20           | 43.20        | Peak     | No Limit |
| 7   | 5574.0000    | 86.76                      | 16.37                   | 103.13                    | 999.00          | -895.87      | AVG      | No Limit |
| 8   | 5725.0000    | 43.84                      | 17.07                   | 60.91                     | 68.20           | -7.29        | Peak     |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE160) Mode 5570 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

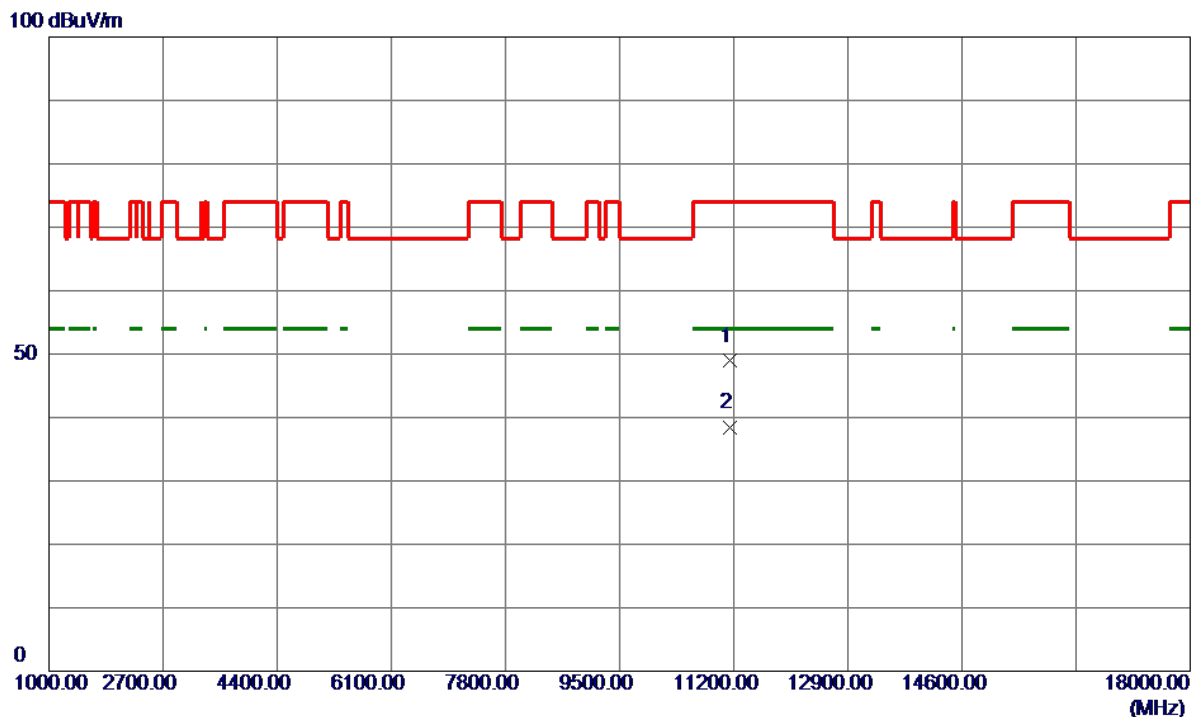


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11138.0199   | 36.49                      | 12.41                   | 48.90                     | 74.00           | -25.10       | Peak     |         |
| 2 * | 11139.9800   | 26.01                      | 12.42                   | 38.43                     | 54.00           | -15.57       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-3_TX A Mode 5745 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

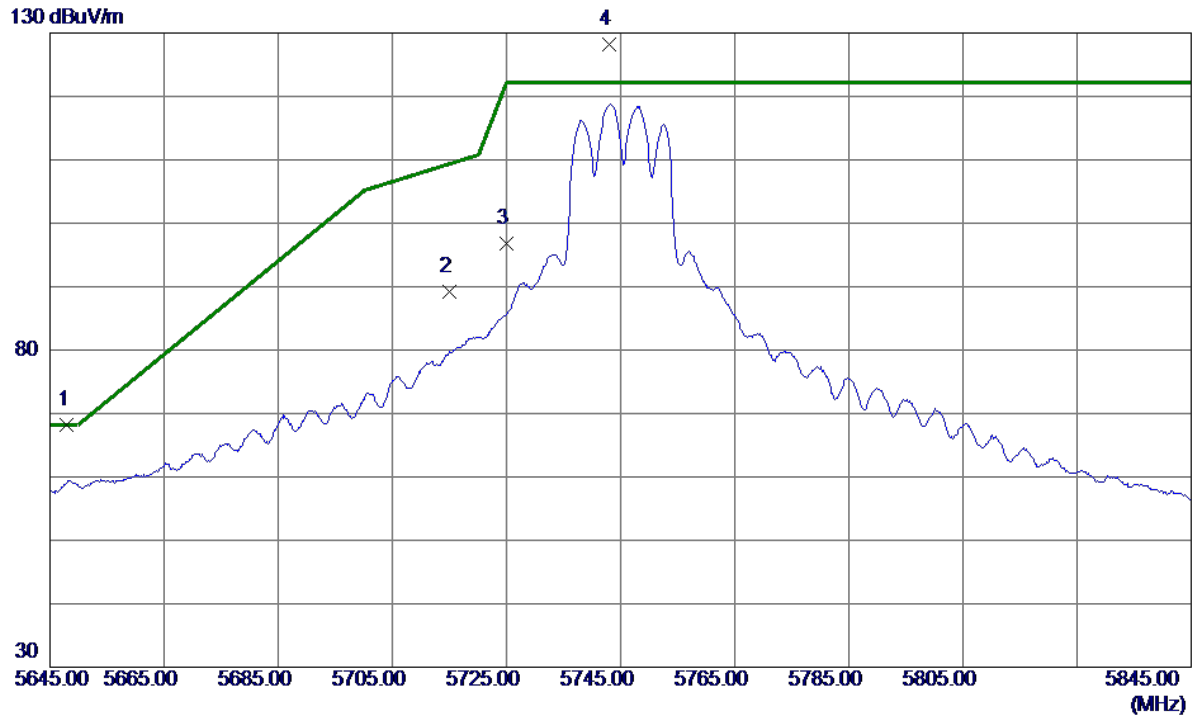


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5648.0000    | 50.94                      | 17.17                   | 68.11                     | 68.20           | -0.09        | Peak     |          |
| 2   | 5715.0000    | 71.80                      | 17.37                   | 89.17                     | 109.40          | -20.23       | Peak     |          |
| 3   | 5725.0000    | 79.44                      | 17.40                   | 96.84                     | 122.20          | -25.36       | Peak     |          |
| 4 * | 5743.0000    | 110.82                     | 17.45                   | 128.27                    | 122.20          | 6.07         | Peak     | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-3_TX A Mode 5745 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

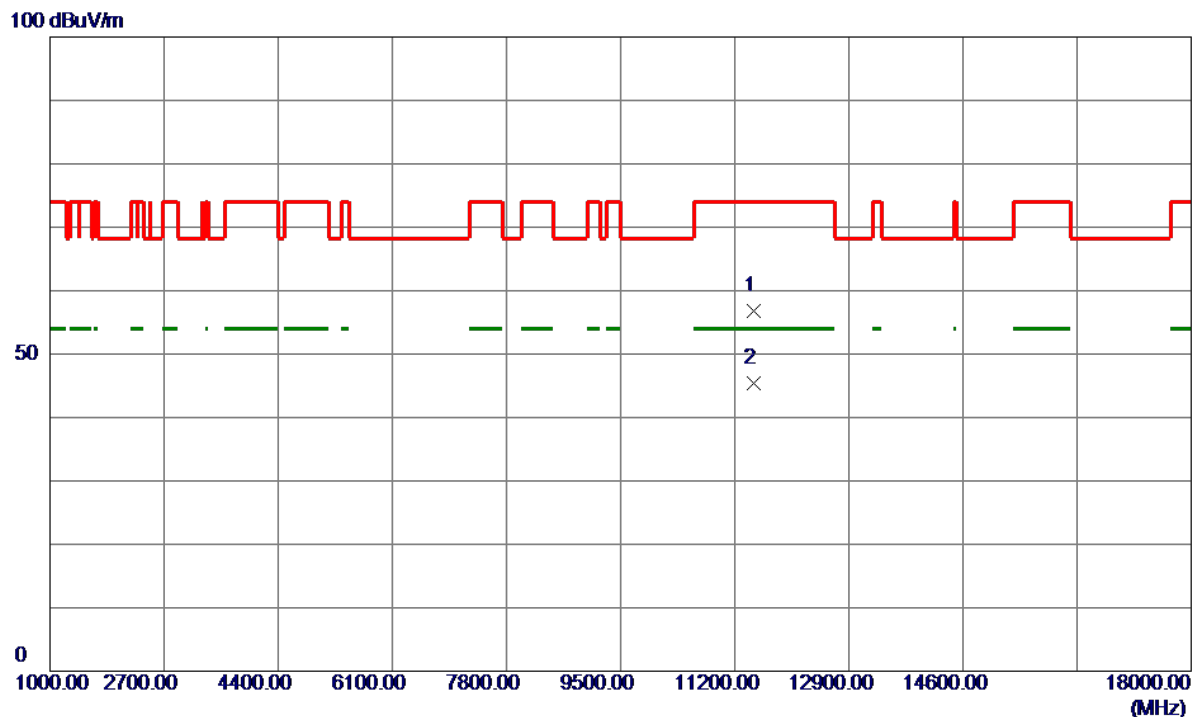


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11488.3000   | 42.85                      | 13.90                   | 56.75                     | 74.00           | -17.25       | Peak     |         |
| 2 * | 11489.9000   | 31.44                      | 13.91                   | 45.35                     | 54.00           | -8.65        | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-3_TX A Mode 5785 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

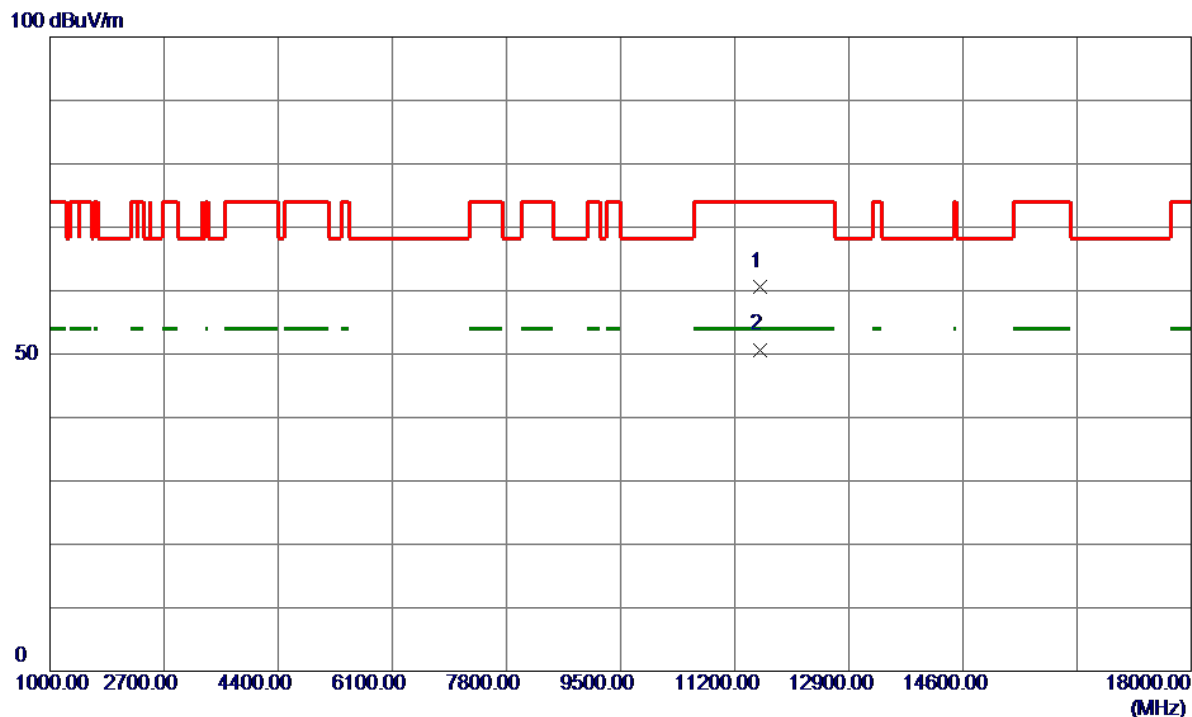


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11568.9000   | 46.83                      | 13.84                   | 60.67                     | 74.00           | -13.33       | Peak     |         |
| 2 * | 11569.9500   | 36.86                      | 13.84                   | 50.70                     | 54.00           | -3.30        | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-3_TX A Mode 5825 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

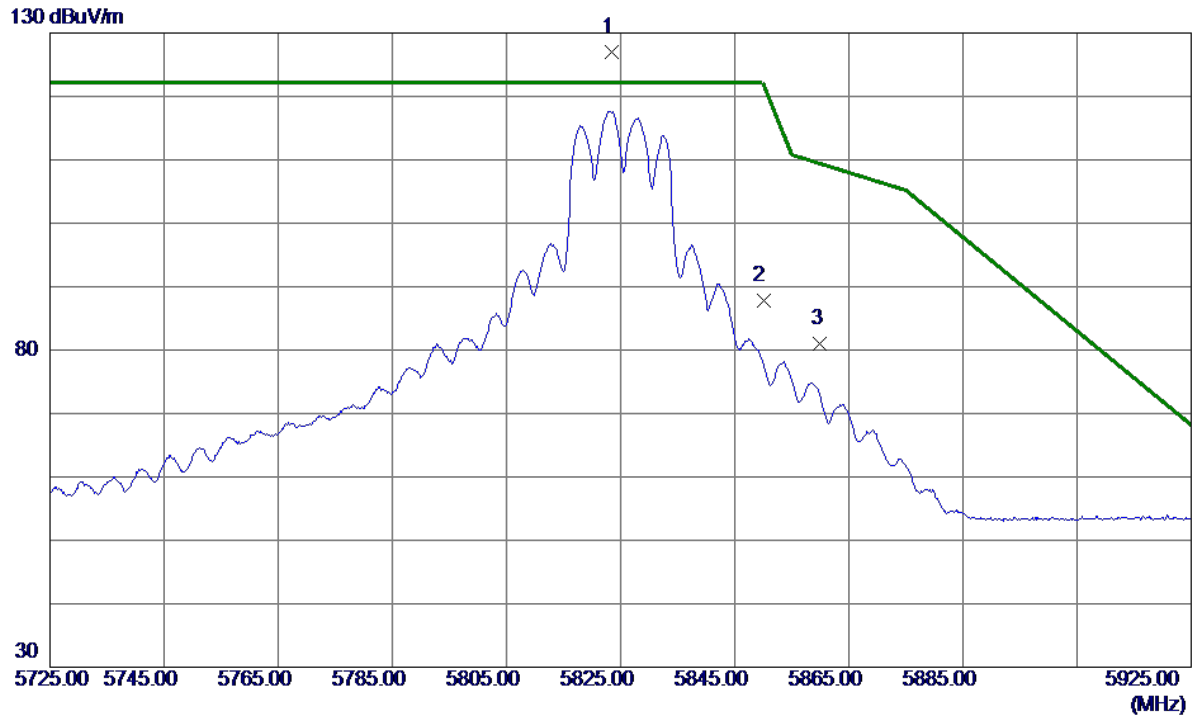


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5823.4000    | 109.32                     | 17.68                   | 127.00                    | 122.20          | 4.80         | Peak     | No Limit |
| 2   | 5850.0000    | 69.97                      | 17.76                   | 87.73                     | 122.20          | -34.47       | Peak     |          |
| 3   | 5860.0000    | 63.20                      | 17.79                   | 80.99                     | 109.40          | -28.41       | Peak     |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-3_TX A Mode 5825 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

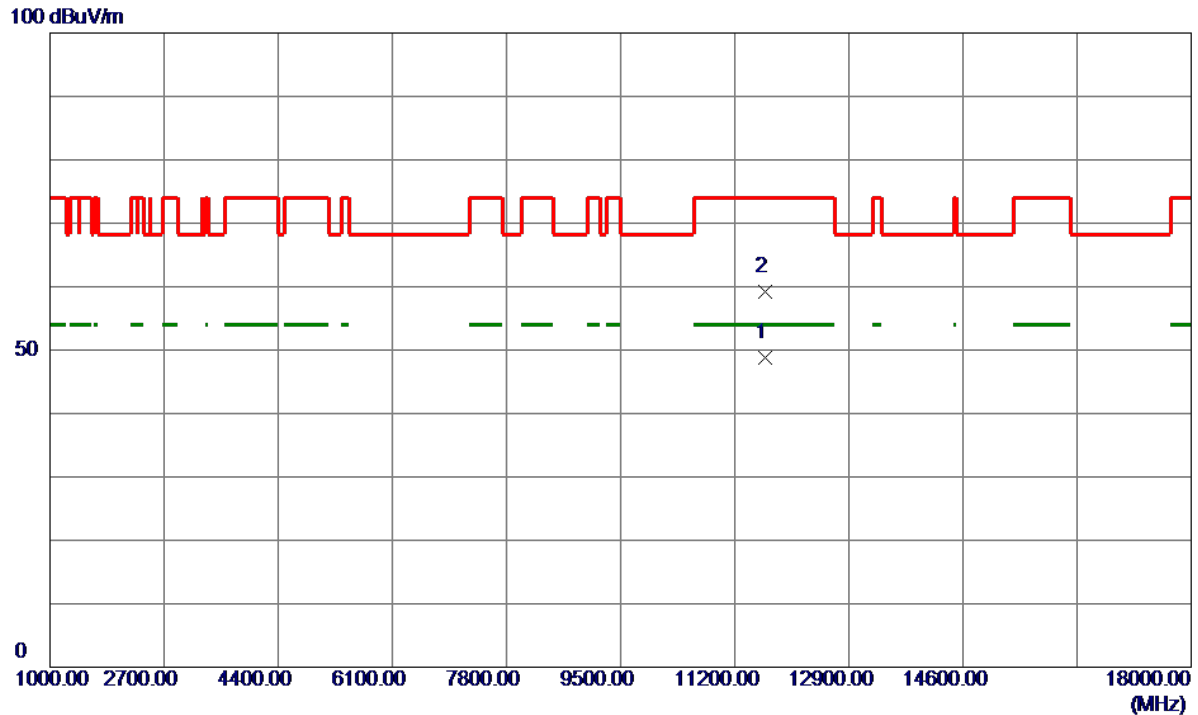


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11649.8500   | 35.08                      | 13.70                   | 48.78                     | 54.00           | -5.22        | AVG      |         |
| 2   | 11650.9500   | 45.45                      | 13.70                   | 59.15                     | 74.00           | -14.85       | Peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5745 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

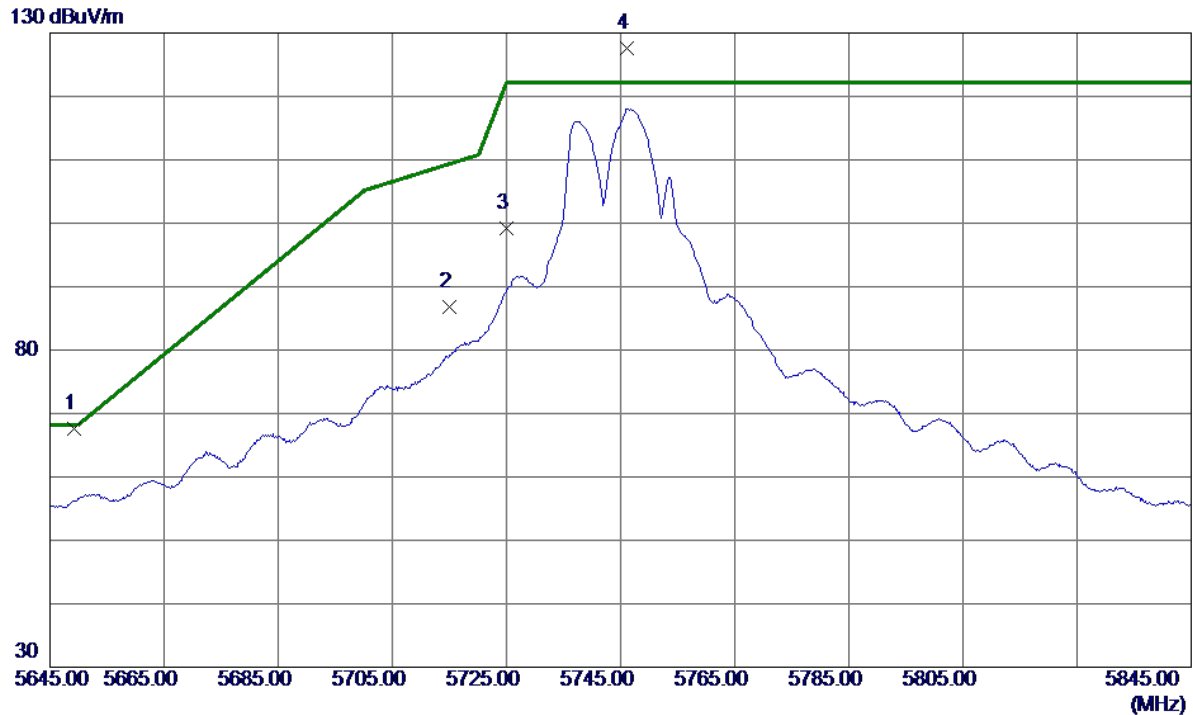


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5649.2000    | 50.38                      | 17.18                   | 67.56                     | 68.20           | -0.64        | Peak     |          |
| 2   | 5715.0000    | 69.44                      | 17.37                   | 86.81                     | 109.40          | -22.59       | Peak     |          |
| 3   | 5725.0000    | 81.78                      | 17.40                   | 99.18                     | 122.20          | -23.02       | Peak     |          |
| 4 * | 5746.2000    | 110.15                     | 17.46                   | 127.61                    | 122.20          | 5.41         | Peak     | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5745 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

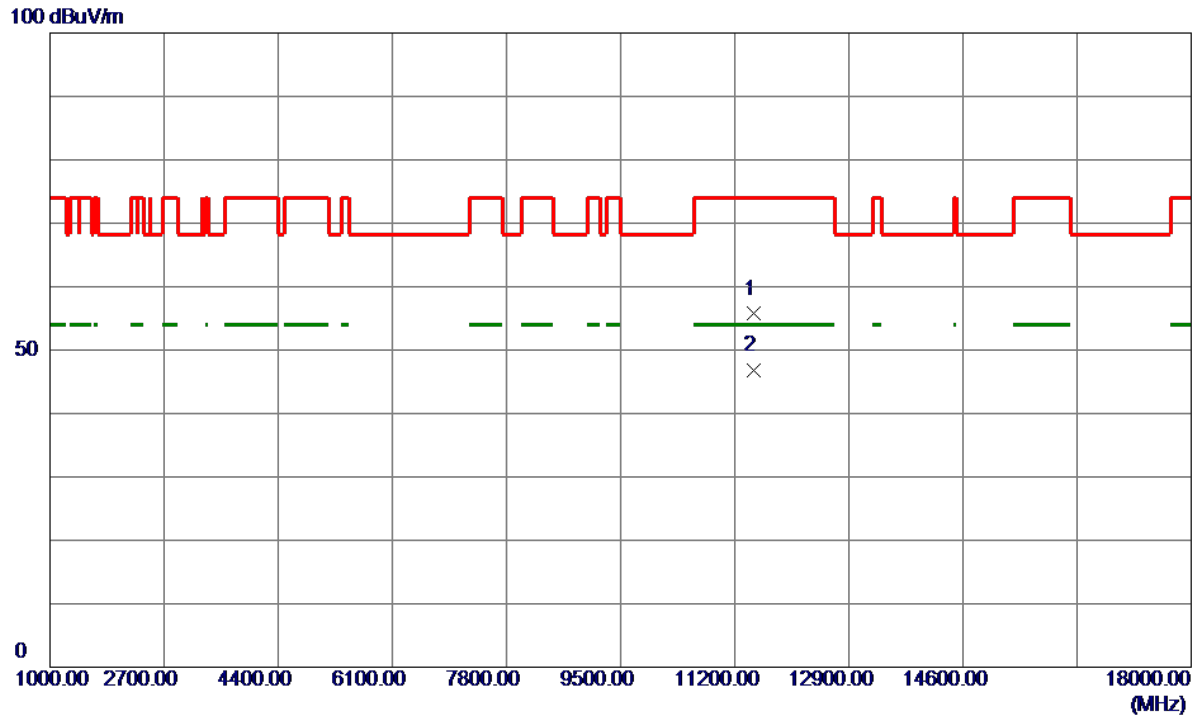


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11485.5500   | 41.81                      | 13.89                   | 55.70                     | 74.00           | -18.30       | Peak     |         |
| 2 * | 11489.3500   | 32.82                      | 13.90                   | 46.72                     | 54.00           | -7.28        | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5785 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

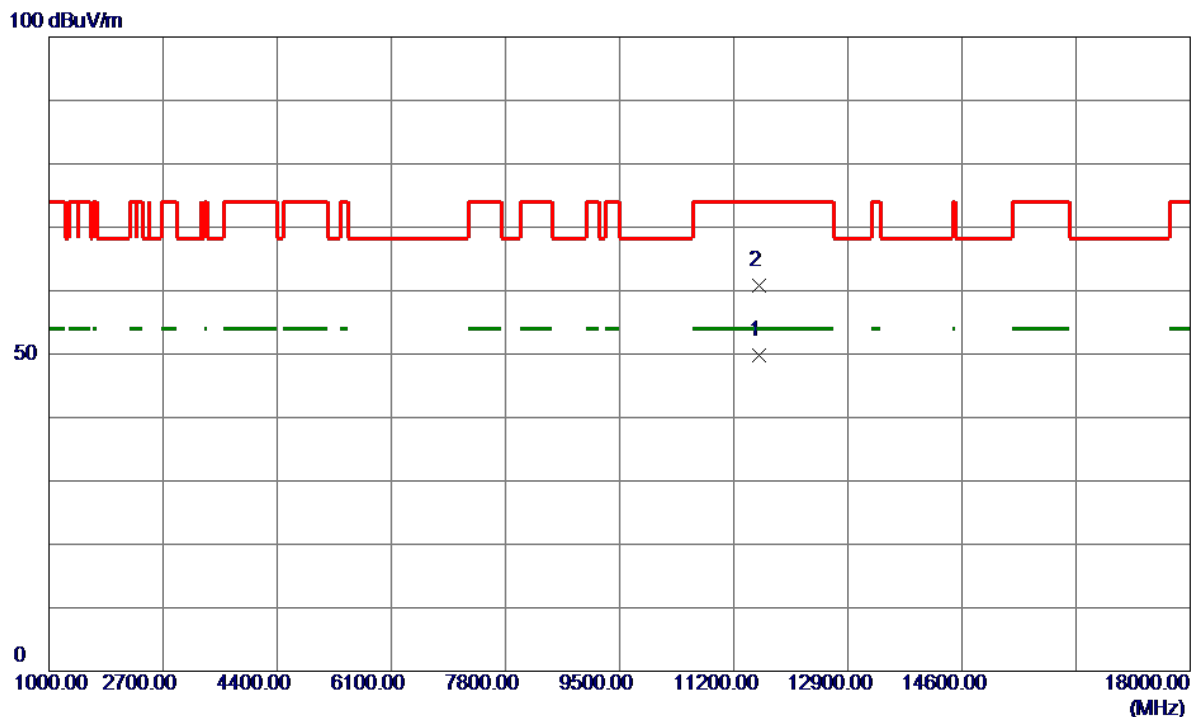


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11569.6500   | 35.95                      | 13.84                   | 49.79                     | 54.00           | -4.21        | AVG      |         |
| 2   | 11570.9500   | 46.88                      | 13.83                   | 60.71                     | 74.00           | -13.29       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5825 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

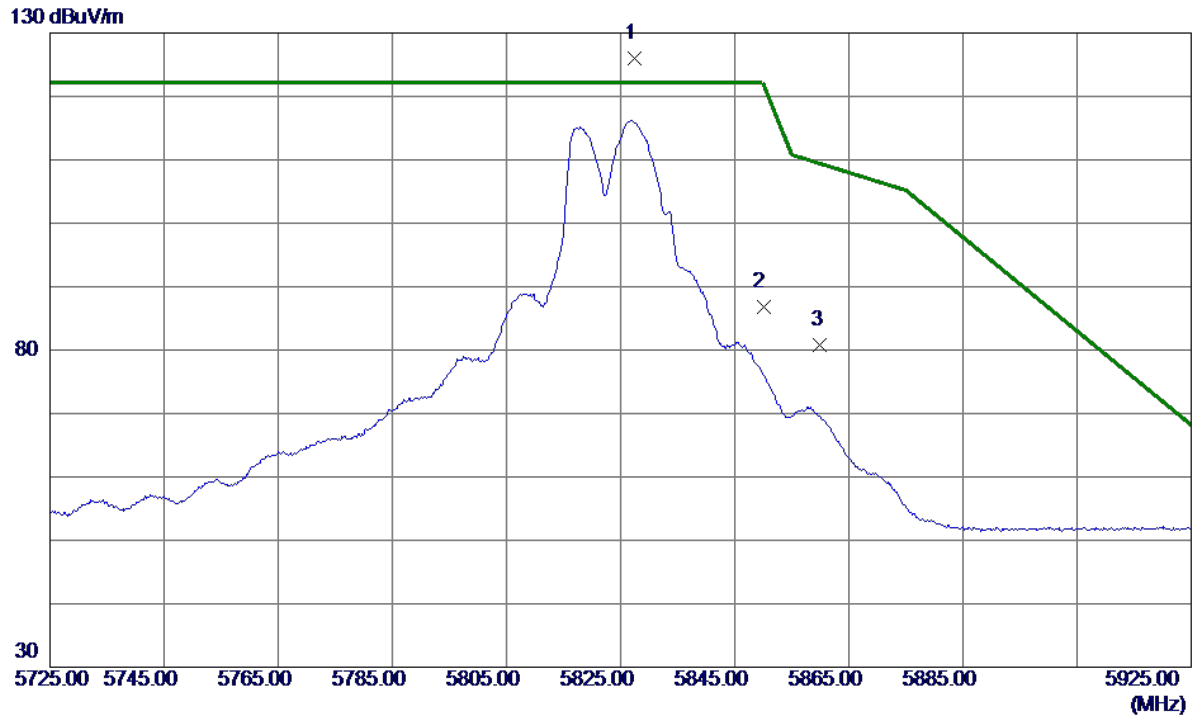


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5827.4000    | 108.33                     | 17.70                   | 126.03                    | 122.20          | 3.83         | Peak     | No Limit |
| 2   | 5850.0000    | 69.04                      | 17.76                   | 86.80                     | 122.20          | -35.40       | Peak     |          |
| 3   | 5860.0000    | 63.04                      | 17.79                   | 80.83                     | 109.40          | -28.57       | Peak     |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5825 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

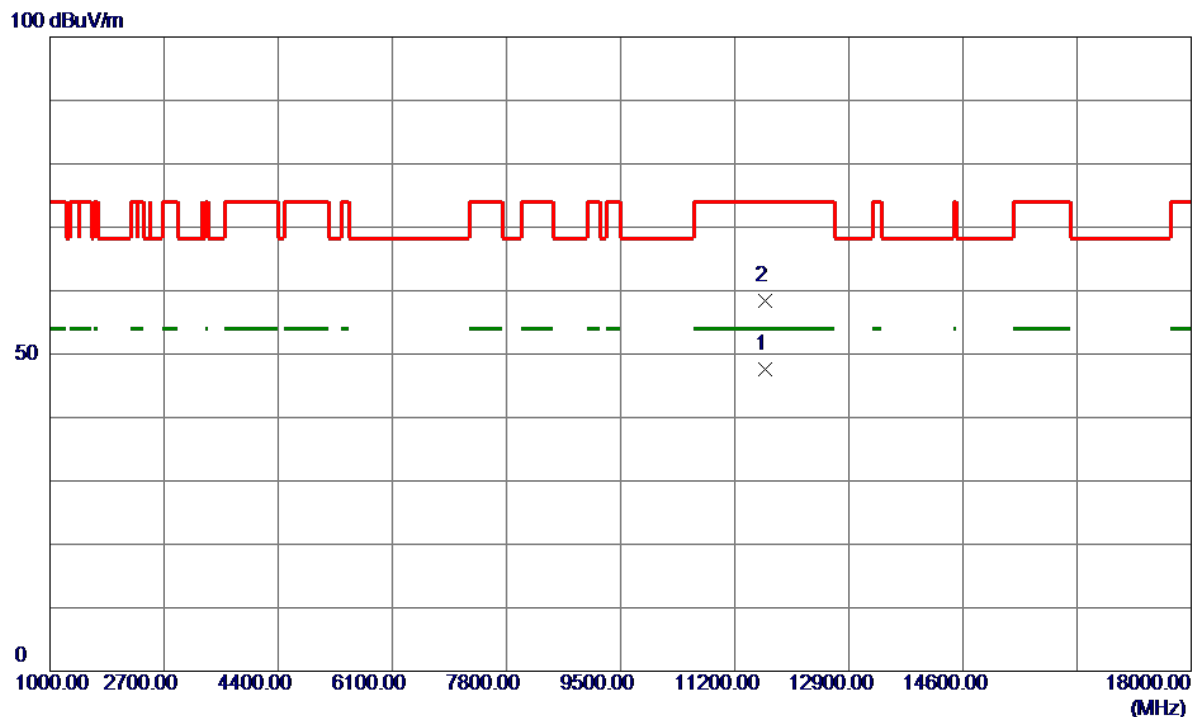


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 11648.2500 | 33.86         | 13.71          | 47.57       | 54.00  | -6.43  | AVG      |         |
| 2   | 11648.8500 | 44.76         | 13.71          | 58.47       | 74.00  | -15.53 | Peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT40) Mode 5755 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

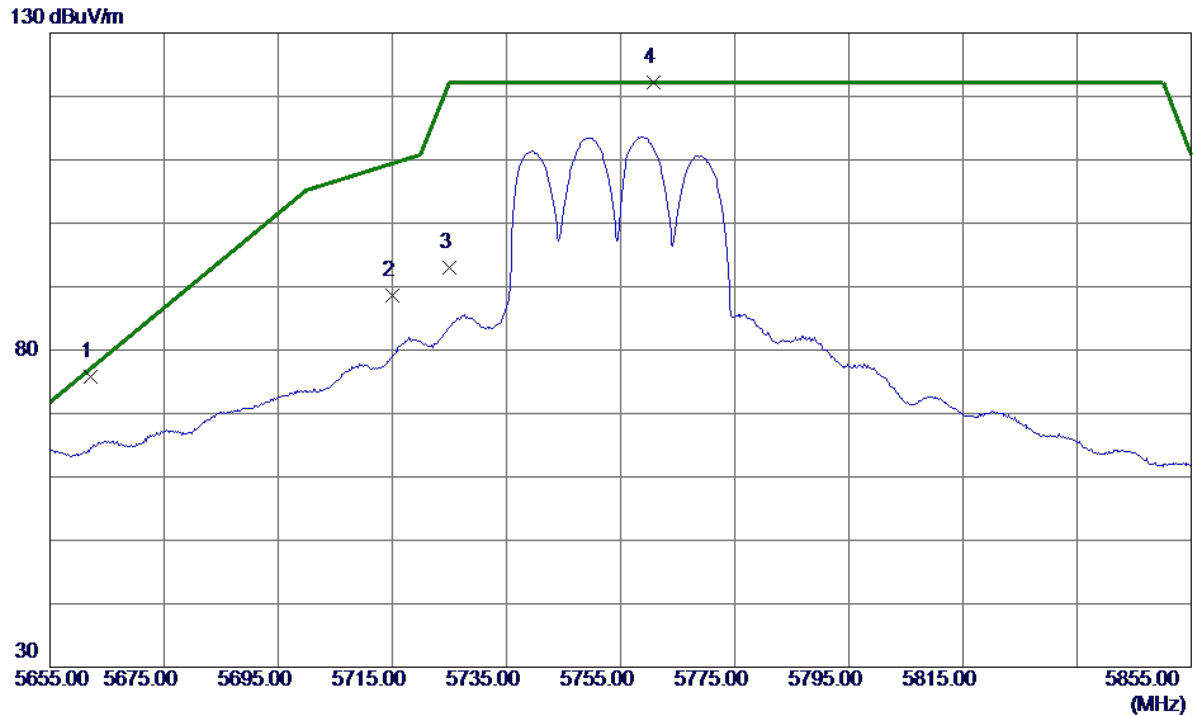


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5662.2000    | 58.50                      | 17.21                   | 75.71                     | 77.23           | -1.52        | Peak     |          |
| 2   | 5715.0000    | 71.20                      | 17.37                   | 88.57                     | 109.40          | -20.83       | Peak     |          |
| 3   | 5725.0000    | 75.55                      | 17.40                   | 92.95                     | 122.20          | -29.25       | Peak     |          |
| 4 * | 5760.8000    | 104.61                     | 17.50                   | 122.11                    | 122.20          | -0.09        | Peak     | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT40) Mode 5755 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

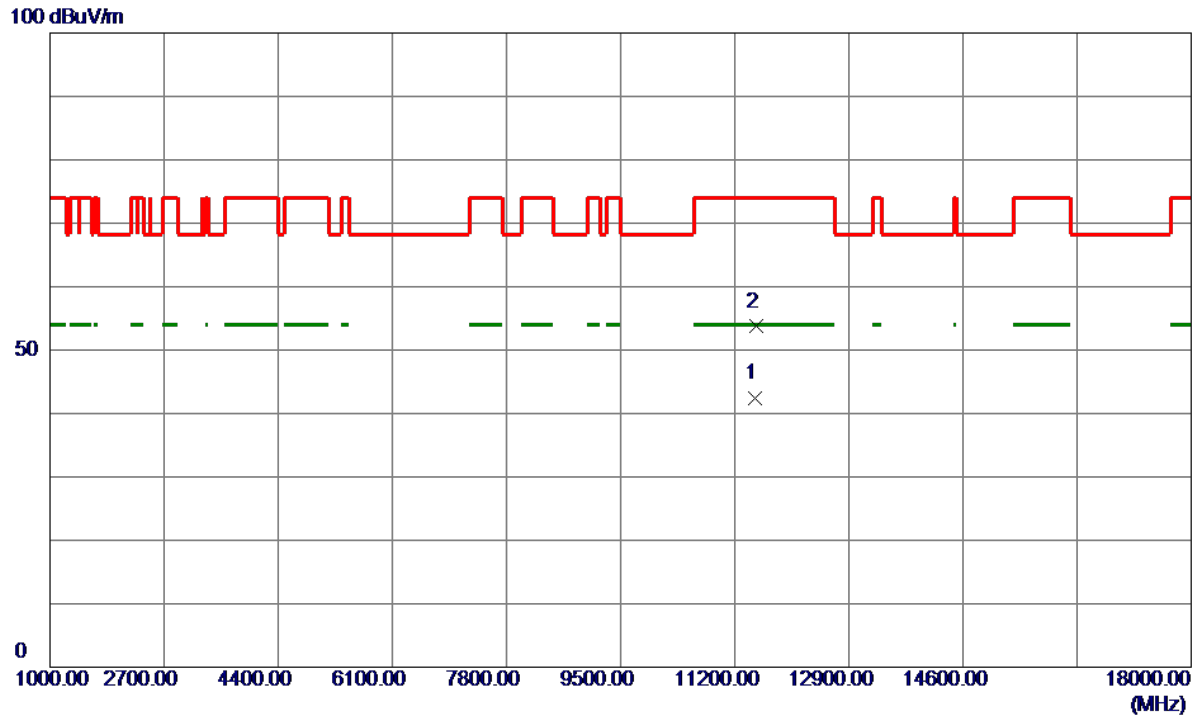


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11511.6500   | 28.45                      | 13.93                   | 42.38                     | 54.00           | -11.62       | AVG      |         |
| 2   | 11520.1500   | 39.78                      | 13.92                   | 53.70                     | 74.00           | -20.30       | Peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT40) Mode 5795 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

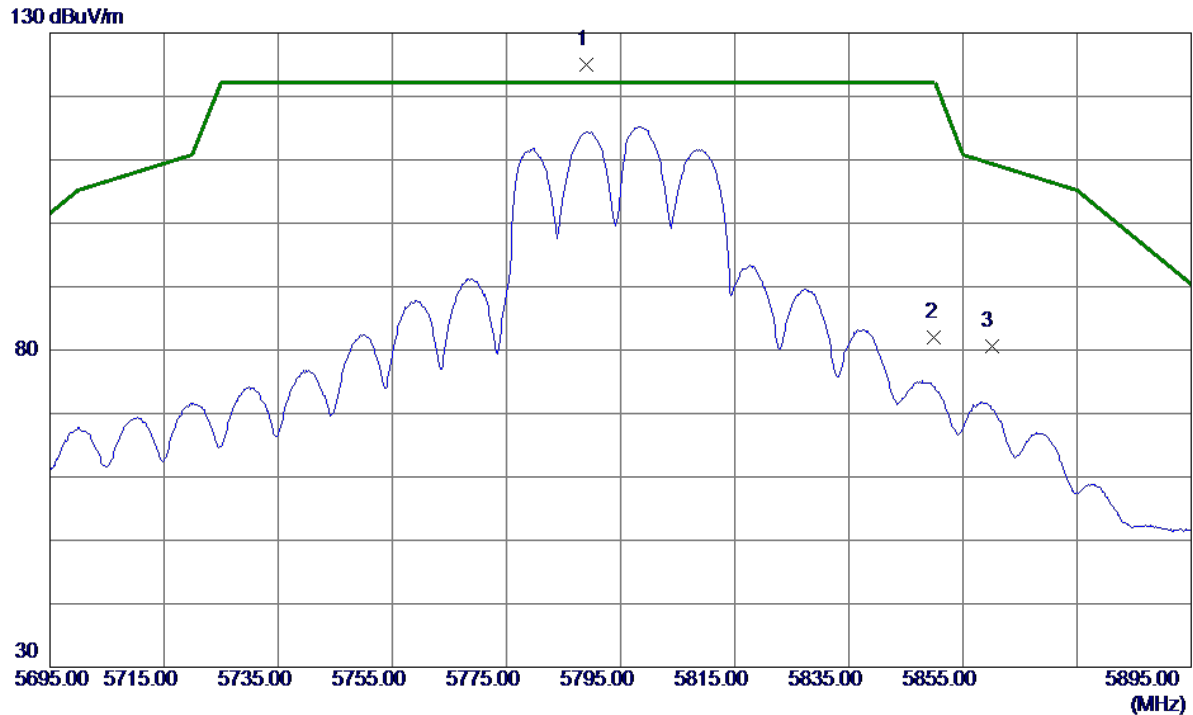


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5789.0000    | 107.50                     | 17.58                   | 125.08                    | 122.20          | 2.88         | Peak     | No Limit |
| 2   | 5850.0000    | 64.21                      | 17.76                   | 81.97                     | 122.20          | -40.23       | Peak     |          |
| 3   | 5860.0000    | 62.72                      | 17.79                   | 80.51                     | 109.40          | -28.89       | Peak     |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT40) Mode 5795 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

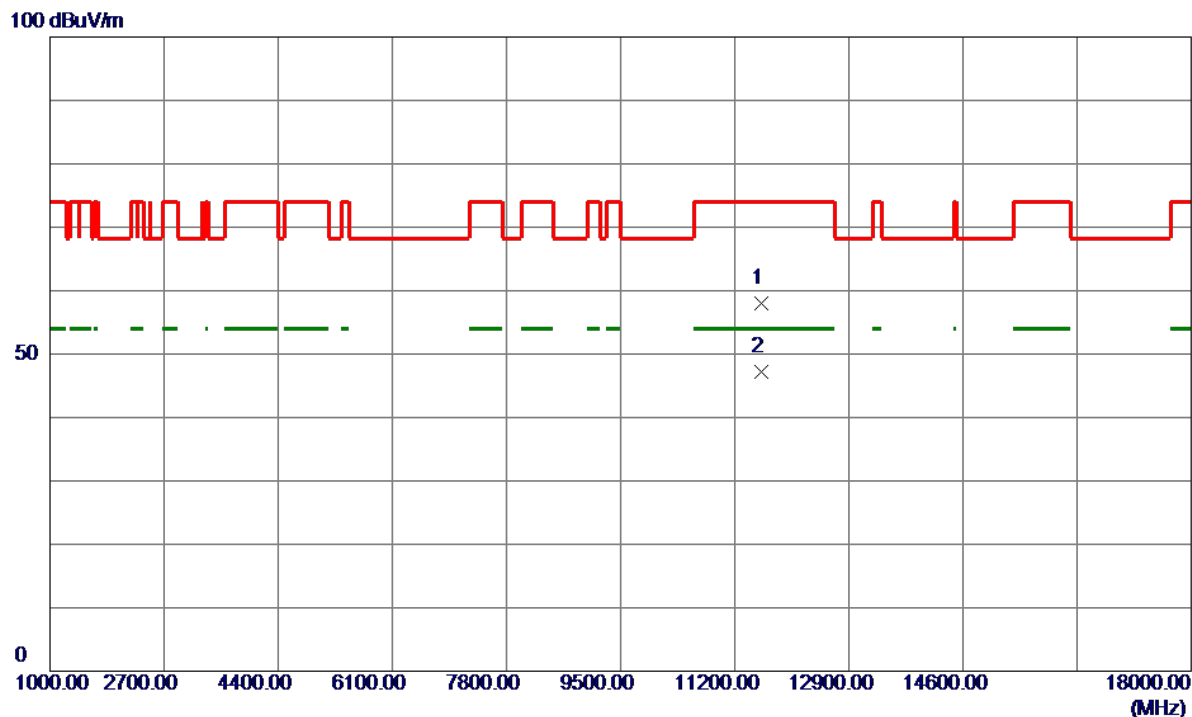


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11599.5000   | 44.24                      | 13.79                   | 58.03                     | 74.00           | -15.97       | Peak     |         |
| 2 * | 11600.5000   | 33.49                      | 13.79                   | 47.28                     | 54.00           | -6.72        | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT80) Mode 5775 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

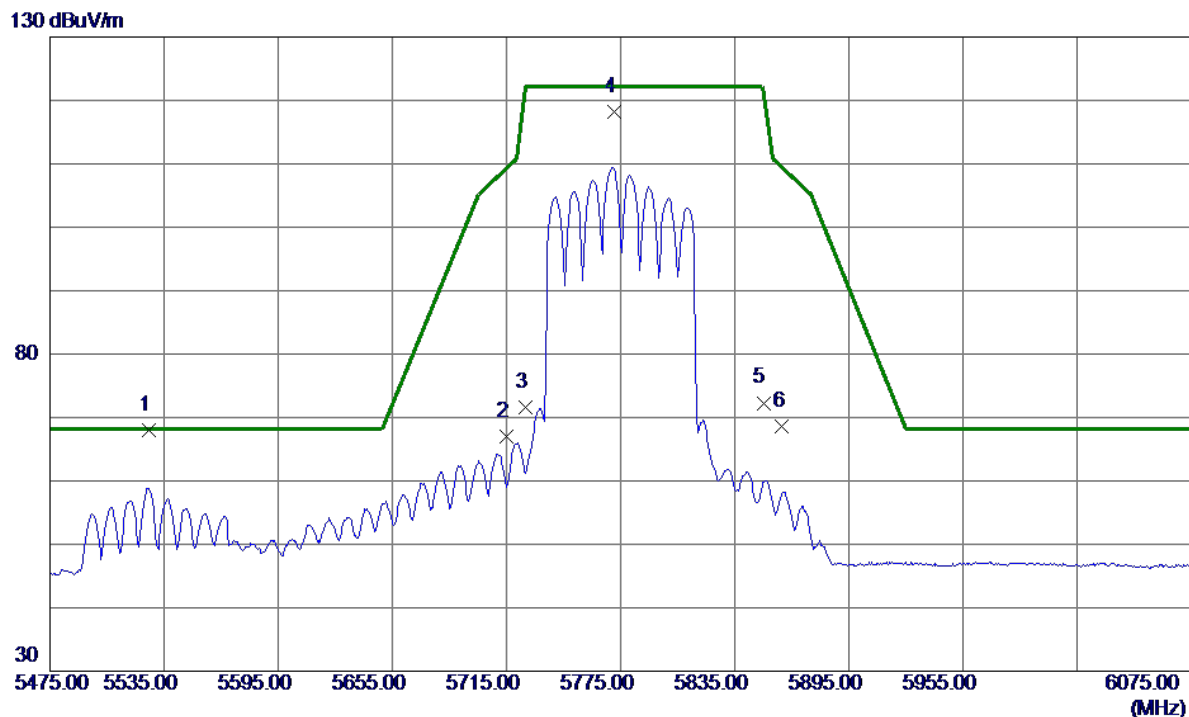


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5527.0000    | 51.88                      | 16.16                   | 68.04                     | 68.20           | -0.16        | Peak     |          |
| 2   | 5715.0000    | 49.89                      | 17.03                   | 66.92                     | 109.40          | -42.48       | Peak     |          |
| 3   | 5725.0000    | 54.61                      | 17.07                   | 71.68                     | 122.20          | -50.52       | Peak     |          |
| 4   | 5771.4000    | 100.86                     | 17.29                   | 118.15                    | 122.20          | -4.05        | Peak     | No Limit |
| 5   | 5850.0000    | 54.65                      | 17.65                   | 72.30                     | 122.20          | -49.90       | Peak     |          |
| 6   | 5860.0000    | 50.94                      | 17.70                   | 68.64                     | 109.40          | -40.76       | Peak     |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT80) Mode 5775 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

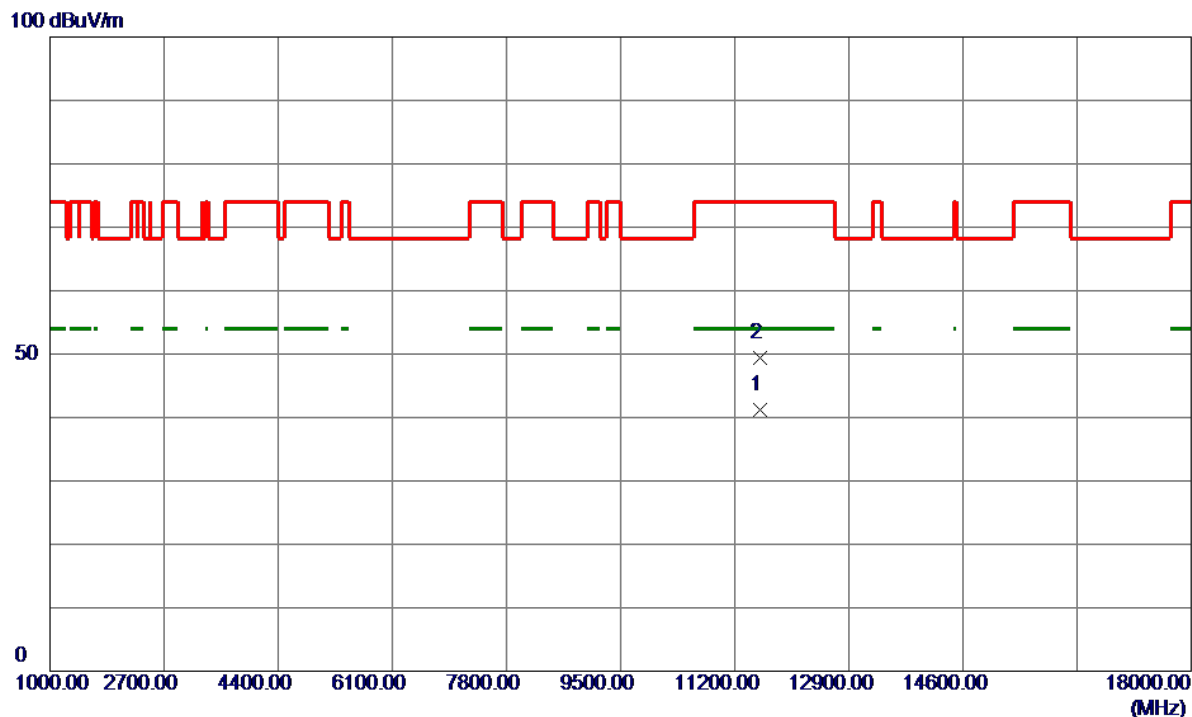


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11569.2000   | 27.29                      | 13.84                   | 41.13                     | 54.00           | -12.87       | AVG      |         |
| 2   | 11574.0500   | 35.66                      | 13.83                   | 49.49                     | 74.00           | -24.51       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5745 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

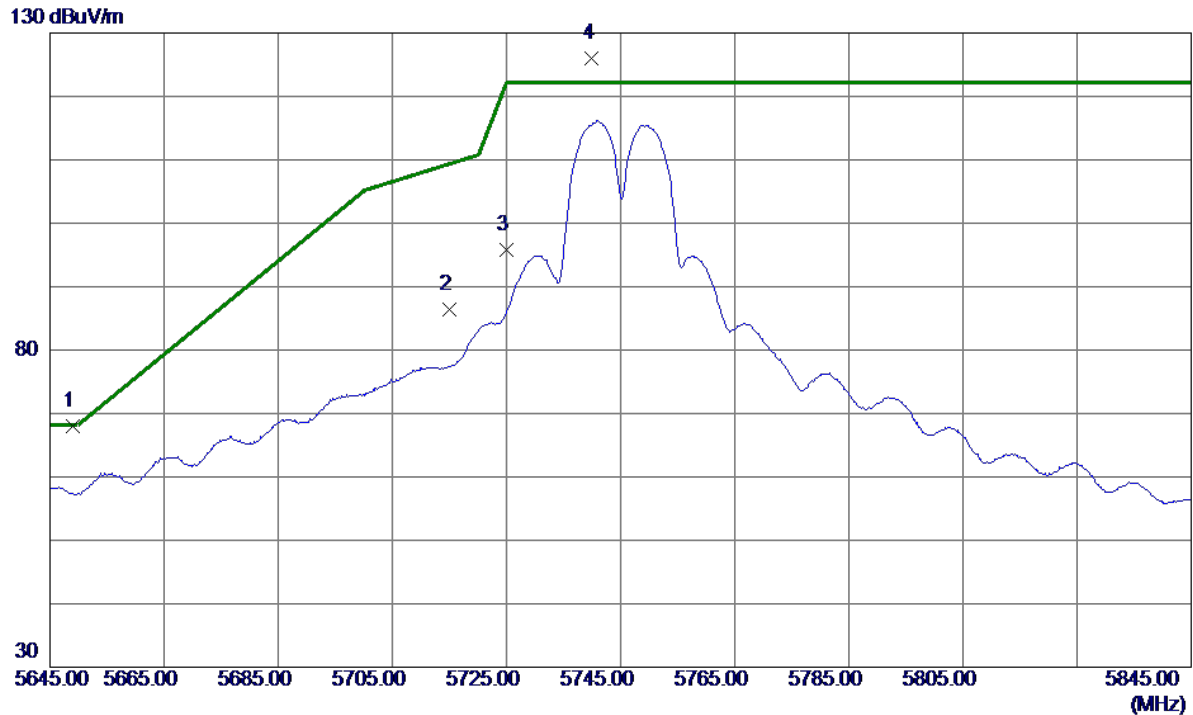


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5649.0000    | 51.30                      | 16.72                   | 68.02                     | 68.20           | -0.18        | Peak     |          |
| 2   | 5715.0000    | 69.32                      | 17.03                   | 86.35                     | 109.40          | -23.05       | Peak     |          |
| 3   | 5725.0000    | 78.64                      | 17.07                   | 95.71                     | 122.20          | -26.49       | Peak     |          |
| 4 * | 5740.0000    | 108.77                     | 17.14                   | 125.91                    | 122.20          | 3.71         | Peak     | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5745 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

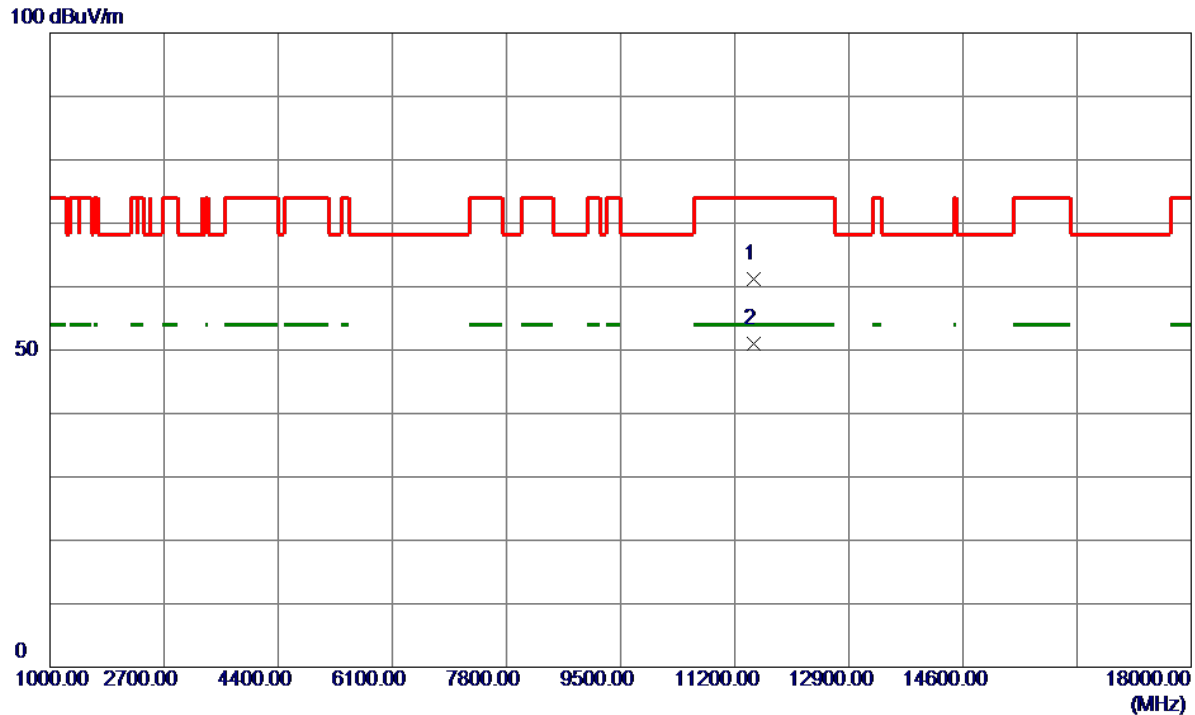


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11481.1000   | 47.34                      | 13.87                   | 61.21                     | 74.00           | -12.79       | Peak     |         |
| 2 * | 11489.5000   | 37.10                      | 13.91                   | 51.01                     | 54.00           | -2.99        | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5785 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

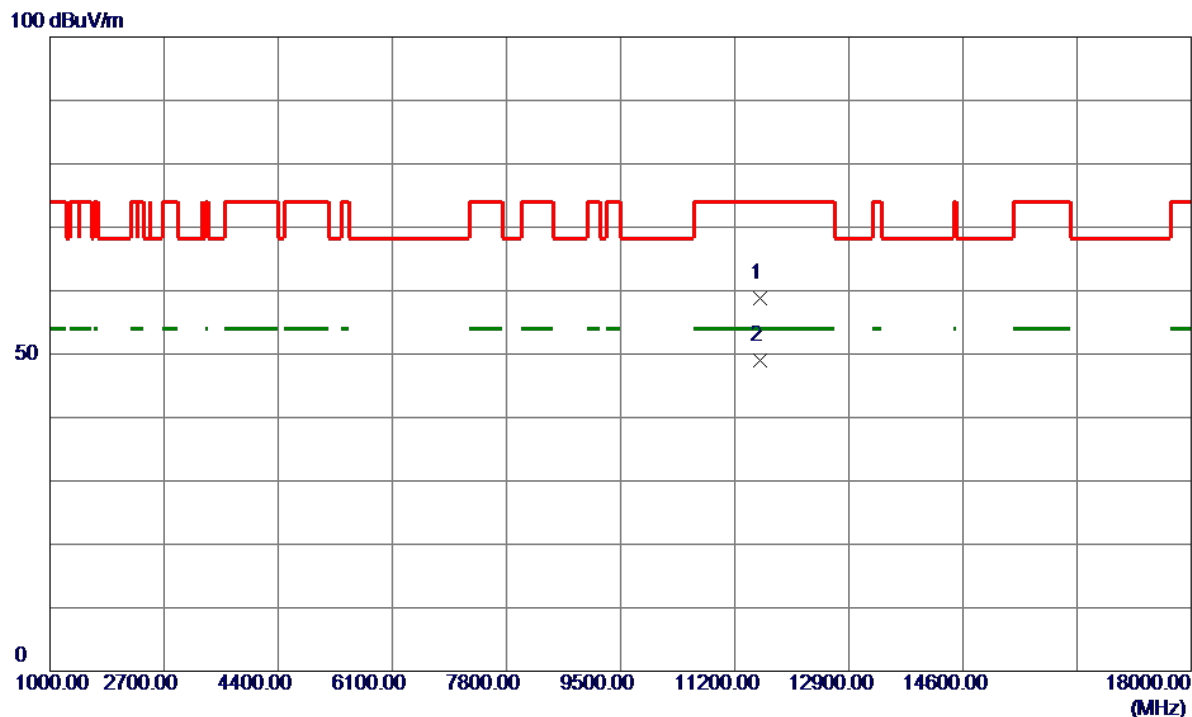


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11569.6500   | 44.87                      | 13.84                   | 58.71                     | 74.00           | -15.29       | Peak     |         |
| 2 * | 11571.2500   | 35.18                      | 13.83                   | 49.01                     | 54.00           | -4.99        | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5825 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

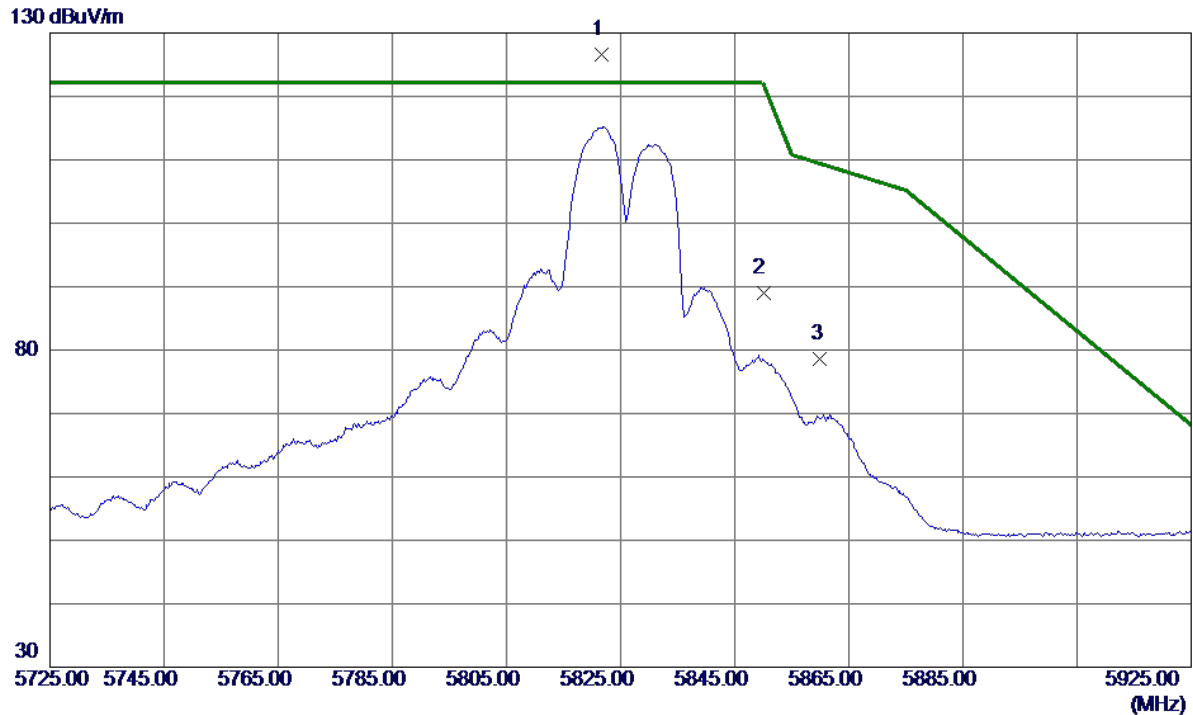


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5821.6000    | 109.04                     | 17.52                   | 126.56                    | 122.20          | 4.36         | Peak     | No Limit |
| 2   | 5850.0000    | 71.32                      | 17.65                   | 88.97                     | 122.20          | -33.23       | Peak     |          |
| 3   | 5860.0000    | 60.95                      | 17.70                   | 78.65                     | 109.40          | -30.75       | Peak     |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5825 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

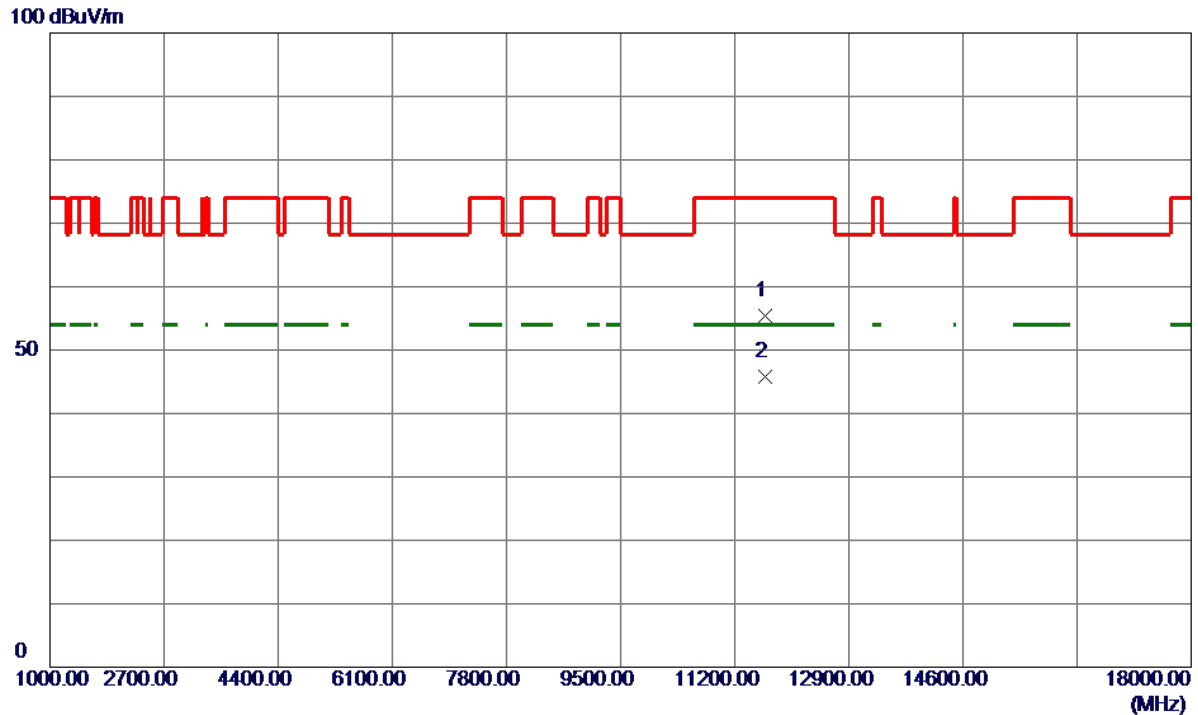


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11650.9000   | 41.79                      | 13.70                   | 55.49                     | 74.00           | -18.51       | Peak     |         |
| 2 * | 11651.1000   | 32.15                      | 13.70                   | 45.85                     | 54.00           | -8.15        | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE40) Mode 5755 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

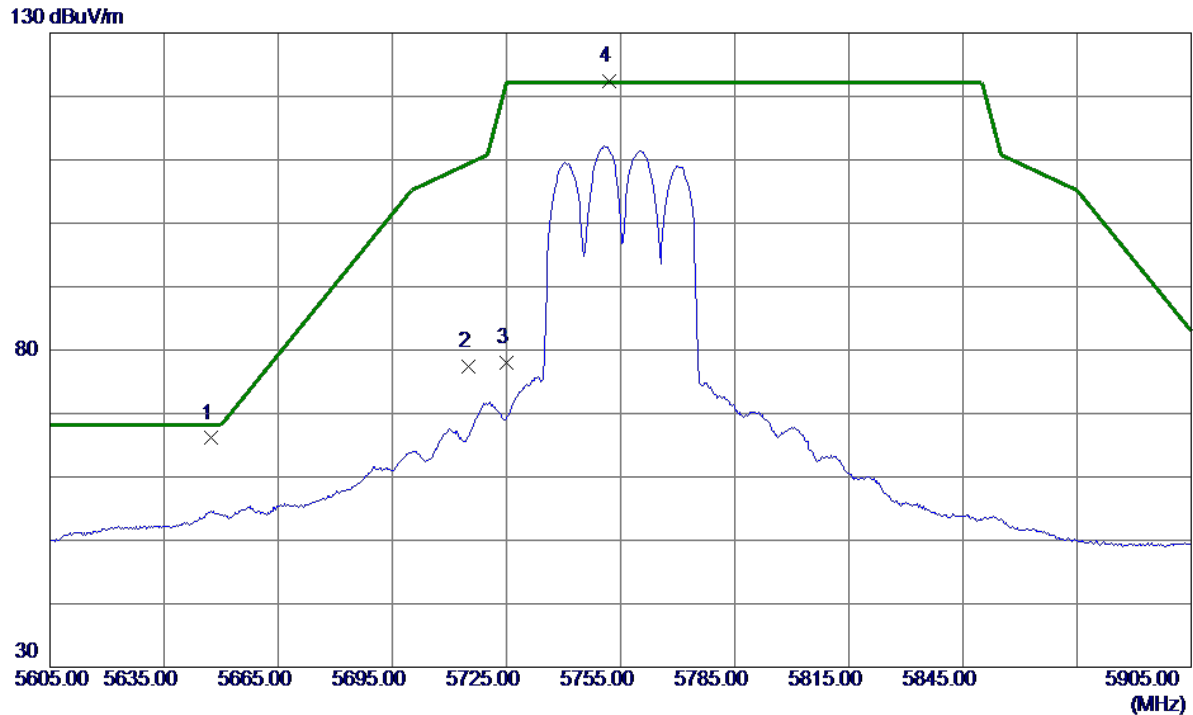


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5647.4000    | 49.39                      | 16.71                   | 66.10                     | 68.20           | -2.10        | Peak     |          |
| 2   | 5715.0000    | 60.38                      | 17.03                   | 77.41                     | 109.40          | -31.99       | Peak     |          |
| 3   | 5725.0000    | 61.01                      | 17.07                   | 78.08                     | 122.20          | -44.12       | Peak     |          |
| 4 * | 5752.0000    | 105.28                     | 17.20                   | 122.48                    | 122.20          | 0.28         | Peak     | No Limit |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE40) Mode 5755 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

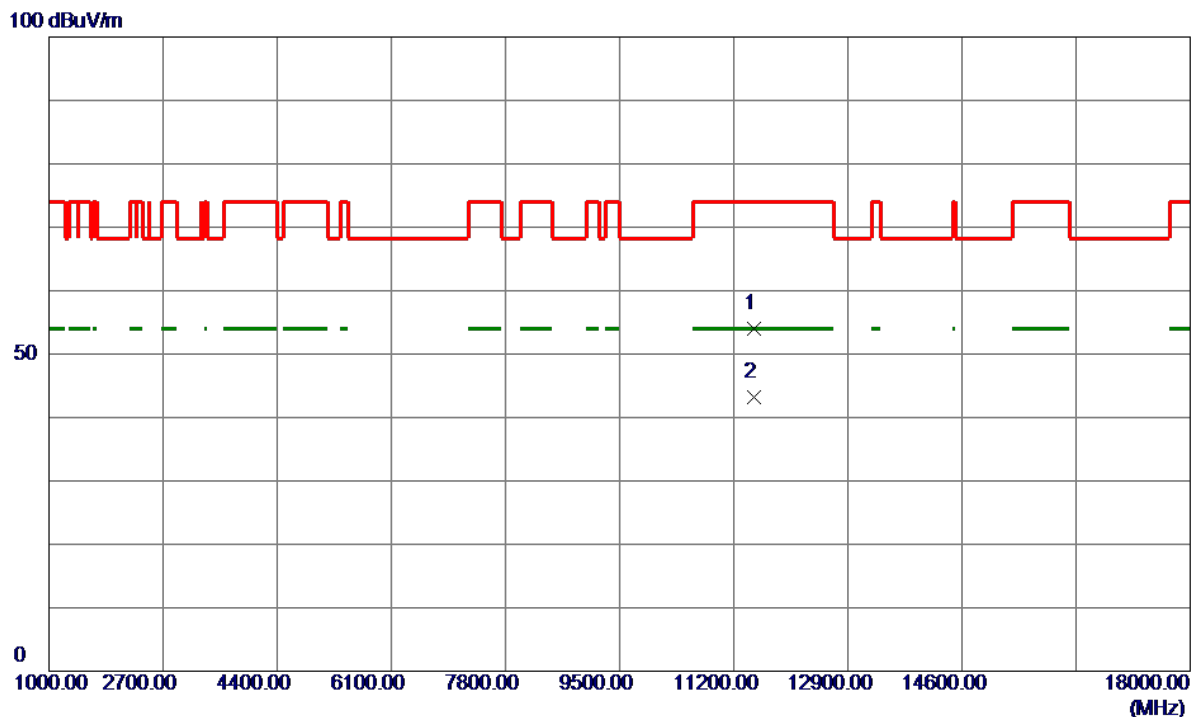


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11508.8000   | 39.97                      | 13.94                   | 53.91                     | 74.00           | -20.09       | Peak     |         |
| 2 * | 11510.7000   | 29.21                      | 13.93                   | 43.14                     | 54.00           | -10.86       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE40) Mode 5795 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

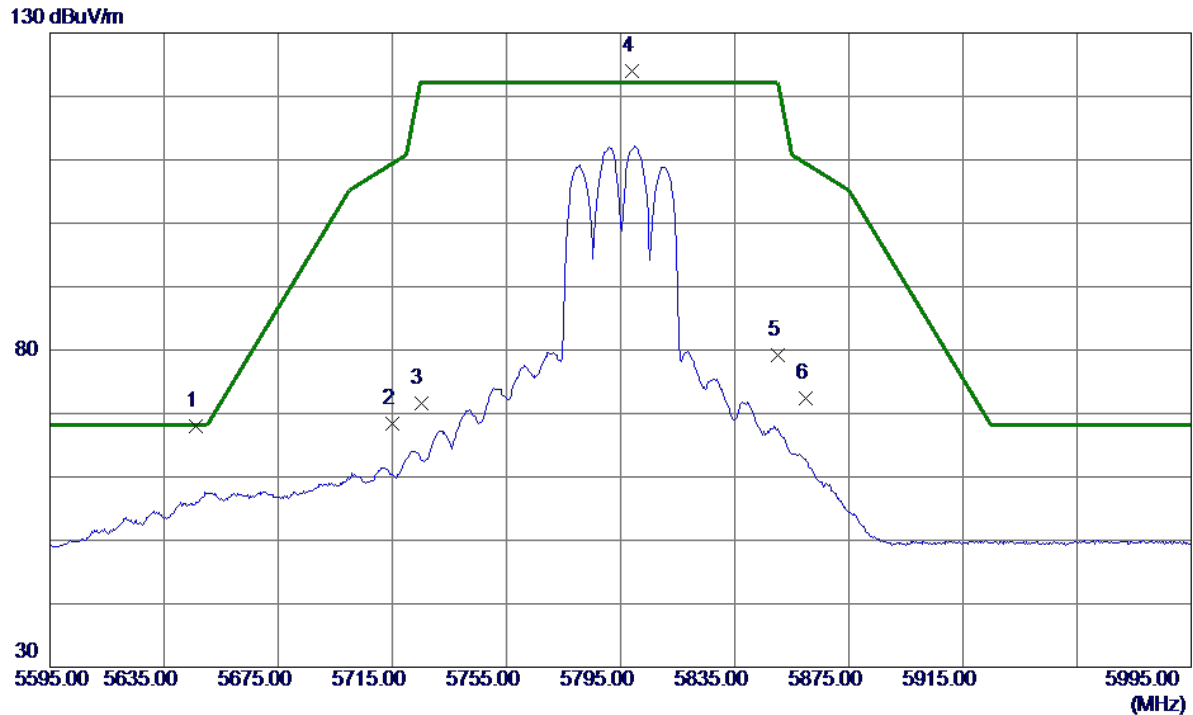


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5646.0000    | 51.21                      | 16.71                   | 67.92                     | 68.20           | -0.28        | Peak     |          |
| 2   | 5715.0000    | 51.34                      | 17.03                   | 68.37                     | 109.40          | -41.03       | Peak     |          |
| 3   | 5725.0000    | 54.51                      | 17.07                   | 71.58                     | 122.20          | -50.62       | Peak     |          |
| 4 * | 5799.0000    | 106.48                     | 17.42                   | 123.90                    | 122.20          | 1.70         | Peak     | No Limit |
| 5   | 5850.0000    | 61.46                      | 17.65                   | 79.11                     | 122.20          | -43.09       | Peak     |          |
| 6   | 5860.0000    | 54.71                      | 17.70                   | 72.41                     | 109.40          | -36.99       | Peak     |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE40) Mode 5795 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

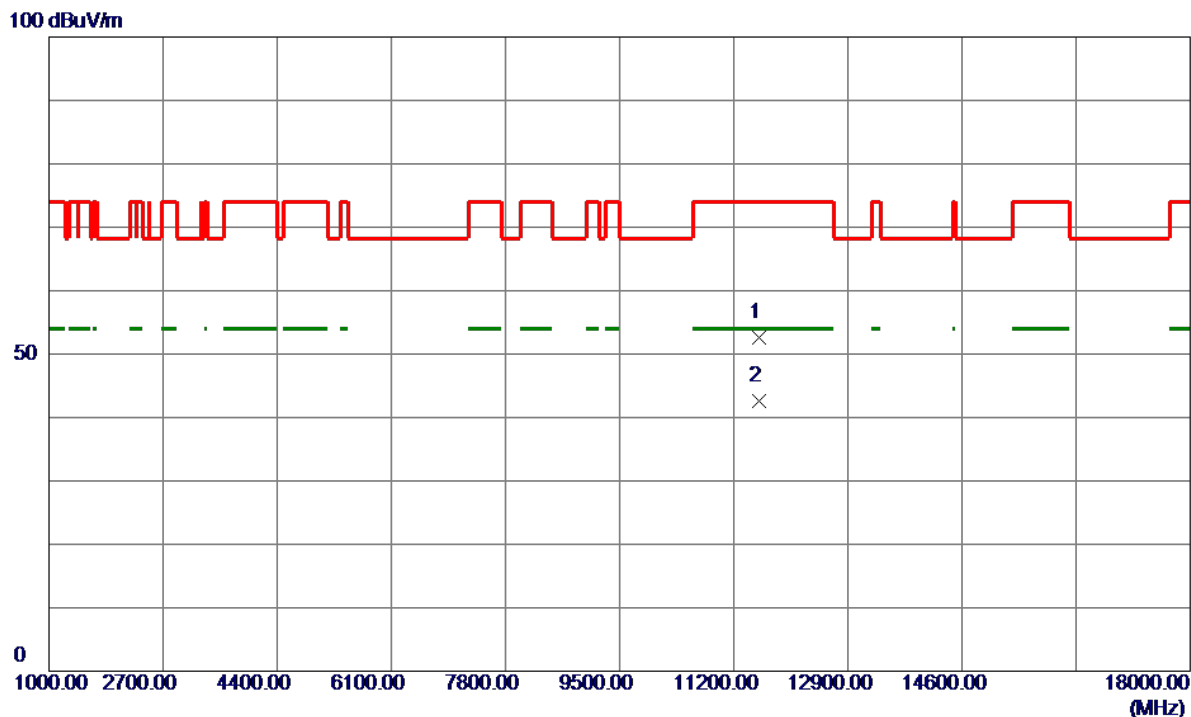


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11580.2000   | 38.76                      | 13.82                   | 52.58                     | 74.00           | -21.42       | Peak     |         |
| 2 * | 11580.7000   | 28.82                      | 13.82                   | 42.64                     | 54.00           | -11.36       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE80) Mode 5775 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

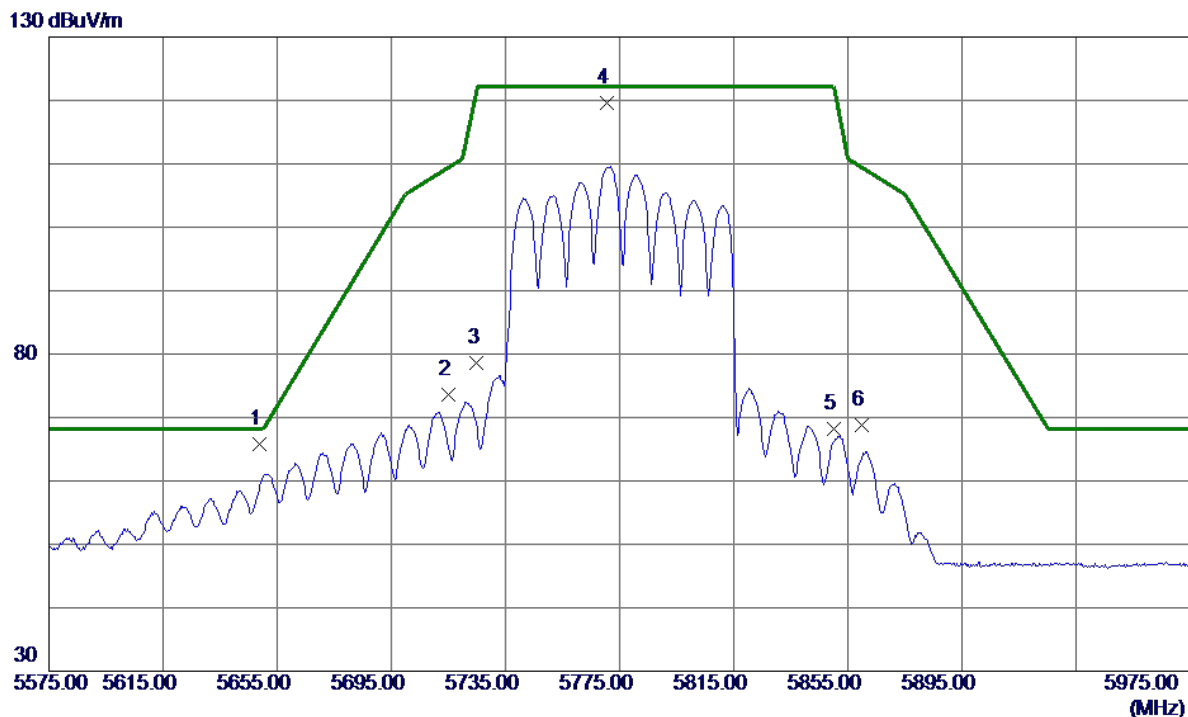


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5648.6000    | 49.16                      | 16.72                   | 65.88                     | 68.20           | -2.32        | Peak     |          |
| 2   | 5715.0000    | 56.57                      | 17.03                   | 73.60                     | 109.40          | -35.80       | Peak     |          |
| 3   | 5725.0000    | 61.60                      | 17.07                   | 78.67                     | 122.20          | -43.53       | Peak     |          |
| 4   | 5770.6000    | 102.30                     | 17.29                   | 119.59                    | 122.20          | -2.61        | Peak     | No Limit |
| 5   | 5850.0000    | 50.60                      | 17.65                   | 68.25                     | 122.20          | -53.95       | Peak     |          |
| 6   | 5860.0000    | 51.03                      | 17.70                   | 68.73                     | 109.40          | -40.67       | Peak     |          |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE80) Mode 5775 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

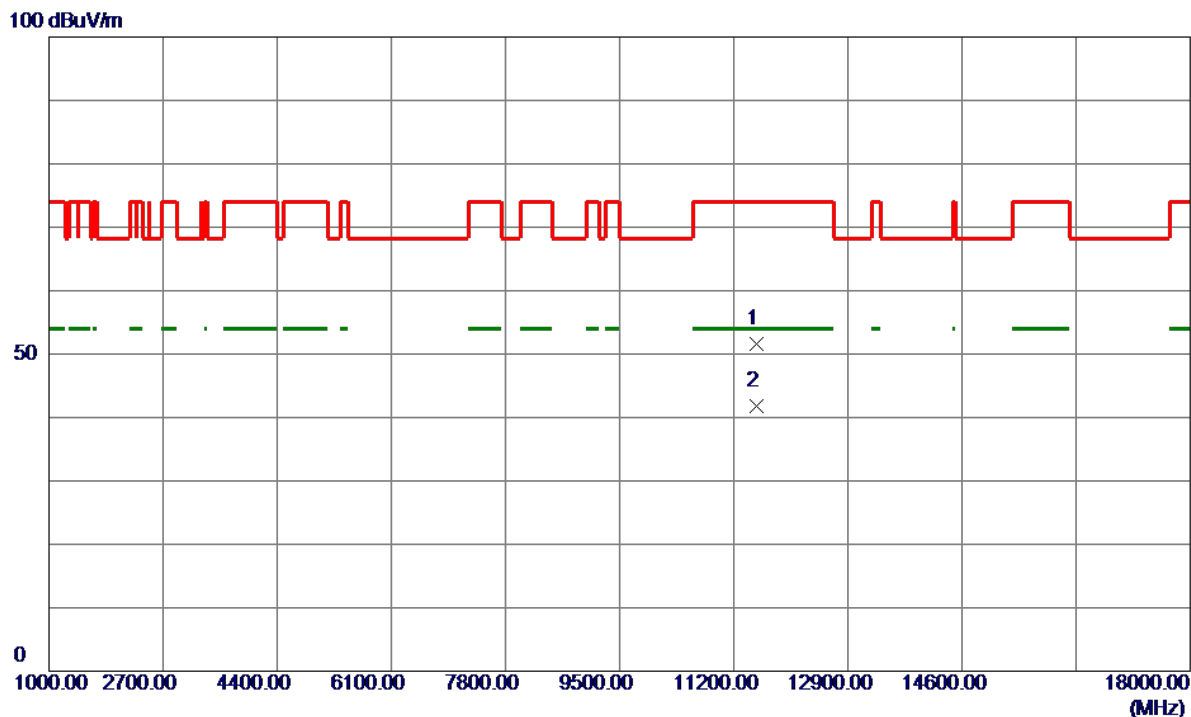


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11538.8000   | 37.64                      | 13.89                   | 51.53                     | 74.00           | -22.47       | Peak     |         |
| 2 * | 11542.0000   | 27.89                      | 13.88                   | 41.77                     | 54.00           | -12.23       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

**Worst Case:**

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5745 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

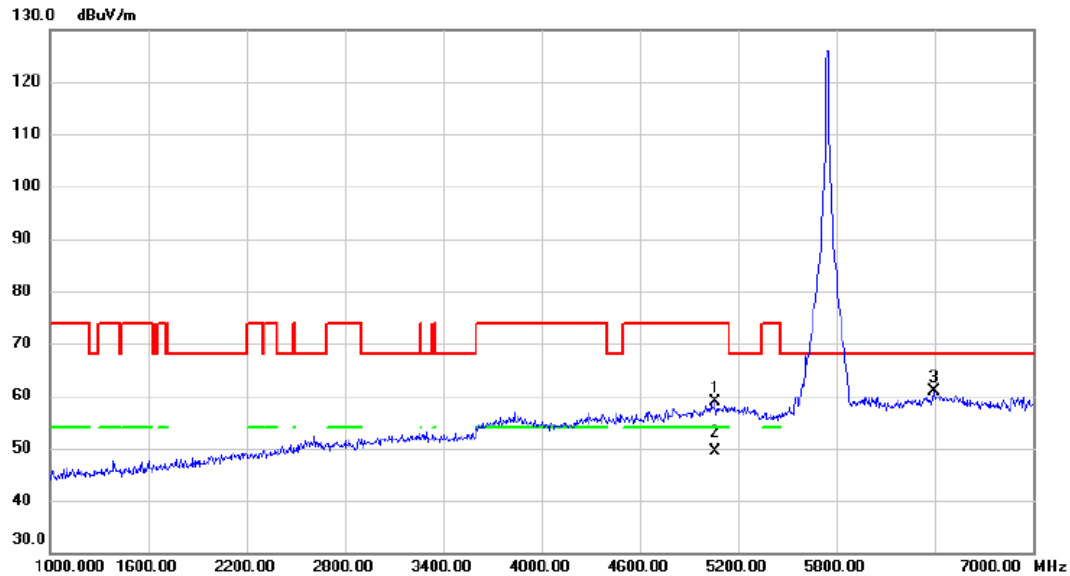


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 5062.000     | 43.16                    | 15.84                   | 59.00                      | 74.00           | -15.00       | peak     |         |
| 2   | *   | 5062.000     | 33.47                    | 15.84                   | 49.31                      | 54.00           | -4.69        | AVG      |         |
| 3   |     | 6394.000     | 41.76                    | 19.04                   | 60.80                      | 68.20           | -7.40        | peak     |         |

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5745 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

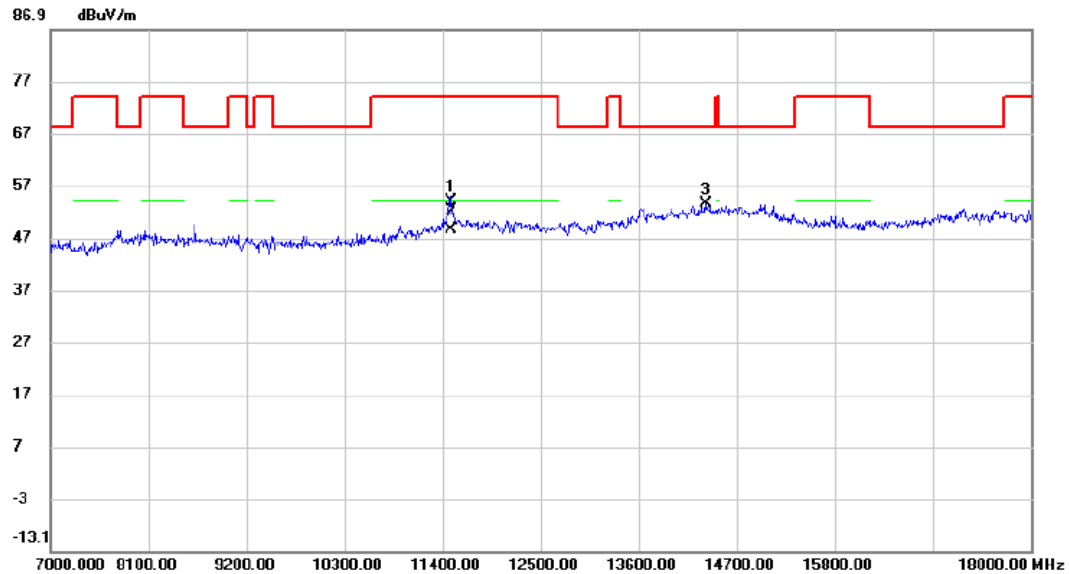

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11488.000    | 40.14                    | 13.91                   | 54.05                      | 74.00           | -19.95       | peak     |         |
| 2   | *   | 11490.000    | 34.58                    | 13.91                   | 48.49                      | 54.00           | -5.51        | AVG      |         |
| 3   |     | 14348.000    | 40.23                    | 13.31                   | 53.54                      | 68.20           | -14.66       | peak     |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5745 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

86.9 dBuV/m

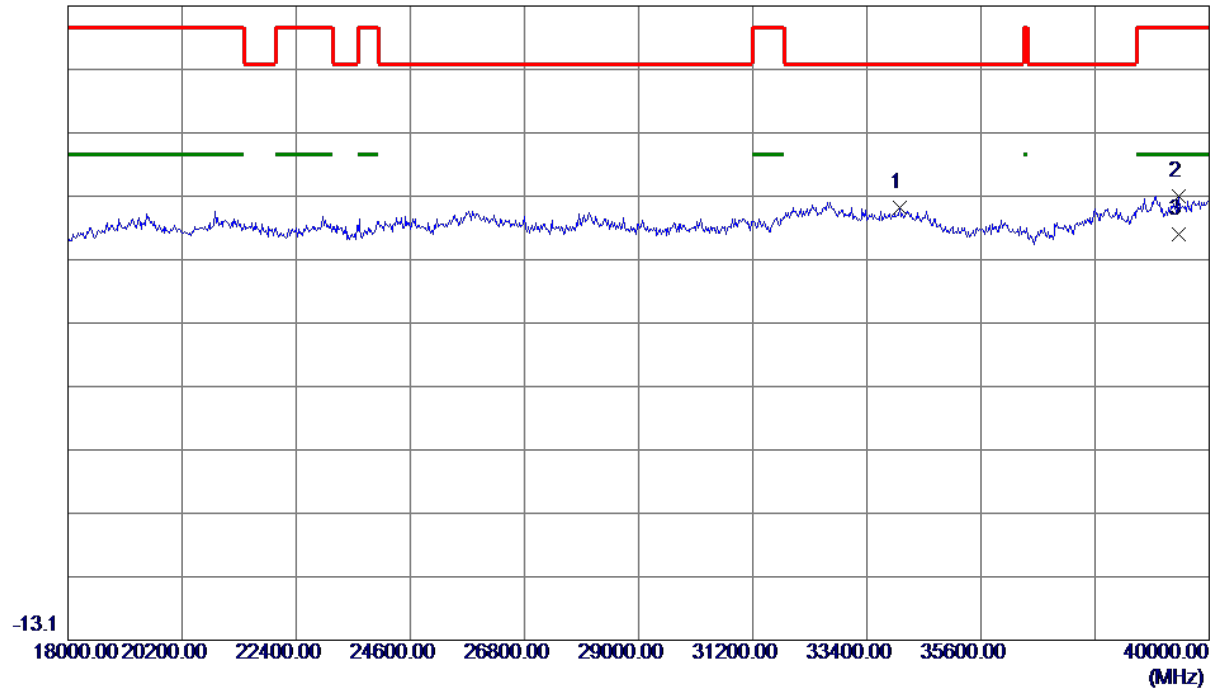

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 34038.0000   | 48.33                      | 6.78                    | 55.11                     | 77.70           | -22.59       | Peak     |         |
| 2   | 39406.0000   | 45.48                      | 11.50                   | 56.98                     | 83.50           | -26.52       | Peak     |         |
| 3 * | 39406.0000   | 39.45                      | 11.50                   | 50.95                     | 63.50           | -12.55       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5745 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

86.9 dBuV/m

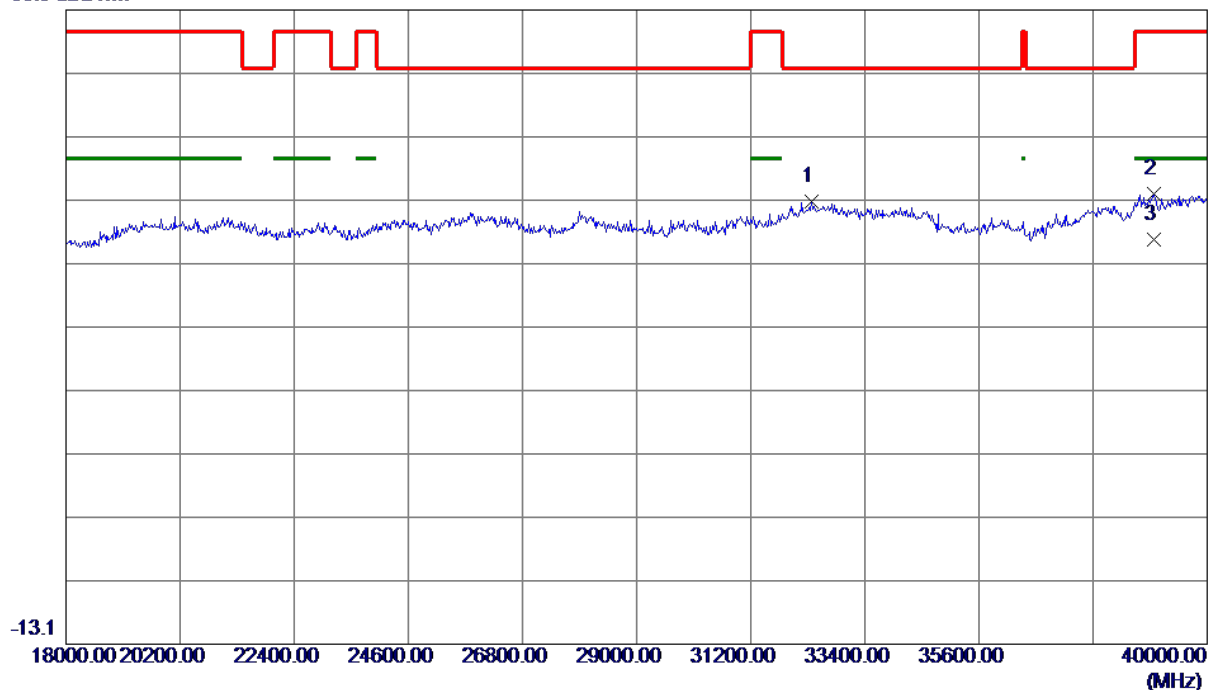

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 32366.0000   | 48.98                      | 7.64                    | 56.62                     | 77.70           | -21.08       | Peak     |         |
| 2   | 38966.0000   | 47.38                      | 10.53                   | 57.91                     | 83.50           | -25.59       | Peak     |         |
| 3 * | 38966.0000   | 40.09                      | 10.53                   | 50.62                     | 63.50           | -12.88       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

## APPENDIX E - BANDWIDTH


Test Mode UNII-1\_TX A Mode

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 18.900                | 16.353                        |
| 40      | 5200            | 19.260                | 16.356                        |
| 48      | 5240            | 18.900                | 16.365                        |


CH36

CH40  
26 dB Bandwidth

CH48

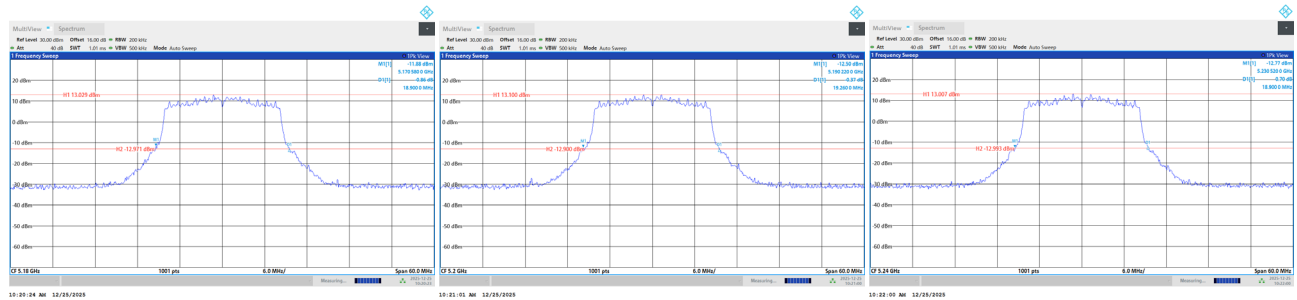

99 % Occupied Bandwidth

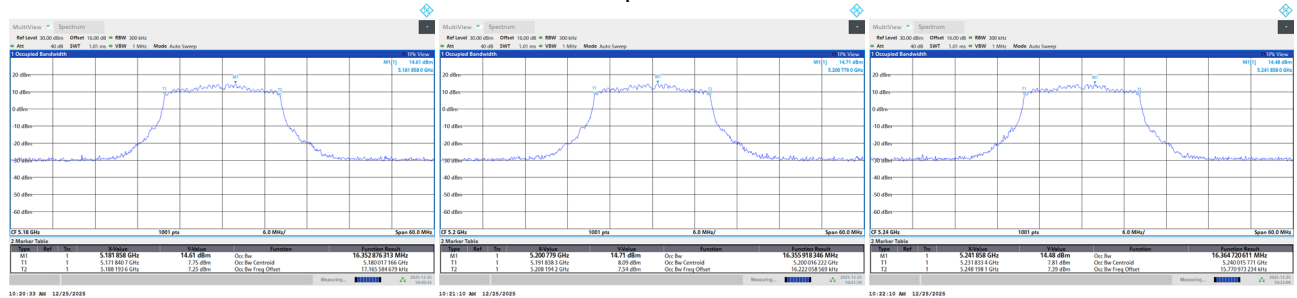


|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-1_TX AC(VHT20) Mode |
|-----------|--------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 19.980                | 17.636                        |
| 40      | 5200            | 20.160                | 17.570                        |
| 48      | 5240            | 20.580                | 17.558                        |


CH36

CH40  
26 dB Bandwidth

CH48

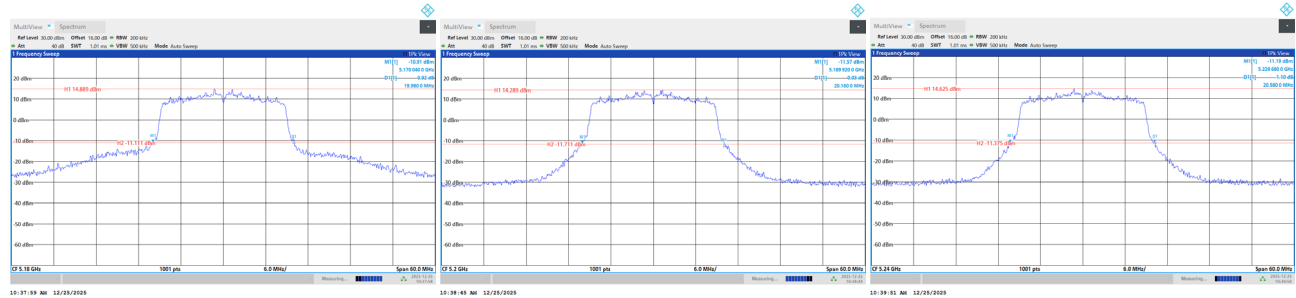


99 % Occupied Bandwidth

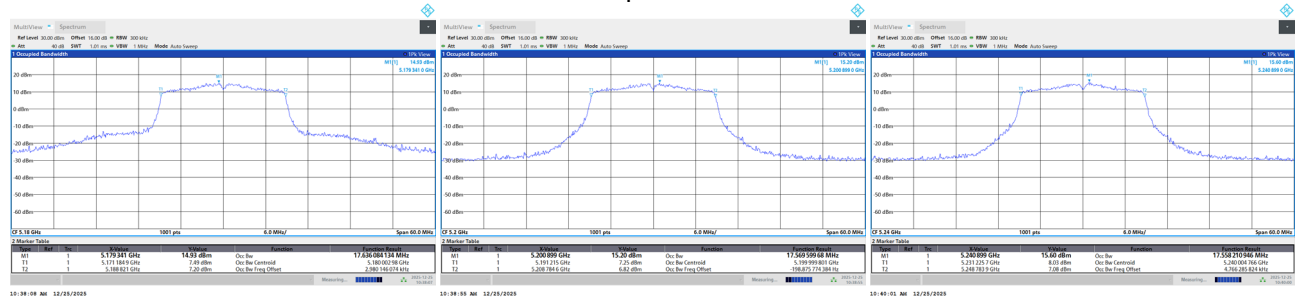


|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-1_TX AC(VHT40) Mode |
|-----------|--------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 38      | 5190            | 41.100                | 36.219                        |
| 46      | 5230            | 40.200                | 36.245                        |



CH38

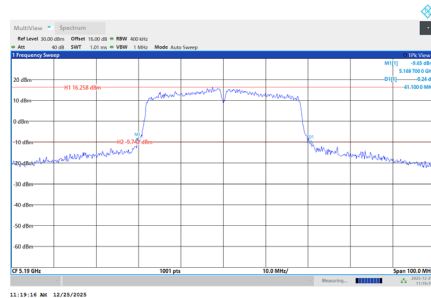

CH46  
26 dB Bandwidth

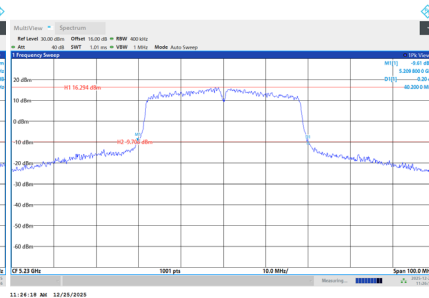


99 % Occupied Bandwidth

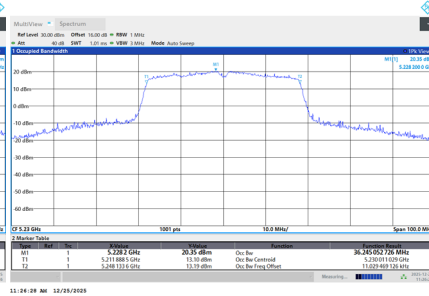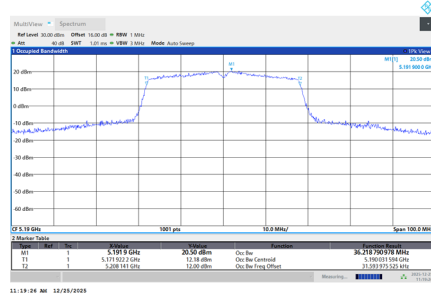


|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-1_TX AC(VHT80) Mode |
|-----------|--------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 42      | 5210            | 133.000               | 77.305                        |

## CH42 26 dB Bandwidth

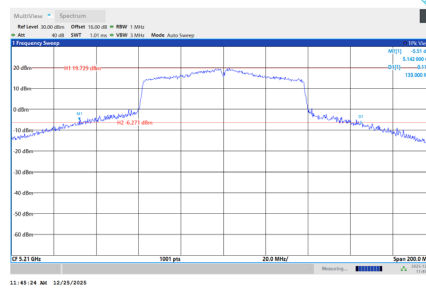

## 99 % Occupied Bandwidth

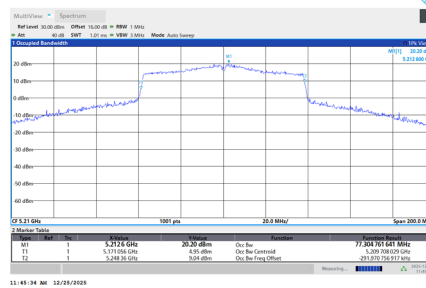


|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-1_TX AX(HE20) Mode |
|-----------|-------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 20.760                | 18.955                        |
| 40      | 5200            | 21.060                | 18.893                        |
| 48      | 5240            | 20.940                | 18.911                        |


CH36

CH40  
26 dB Bandwidth

CH48

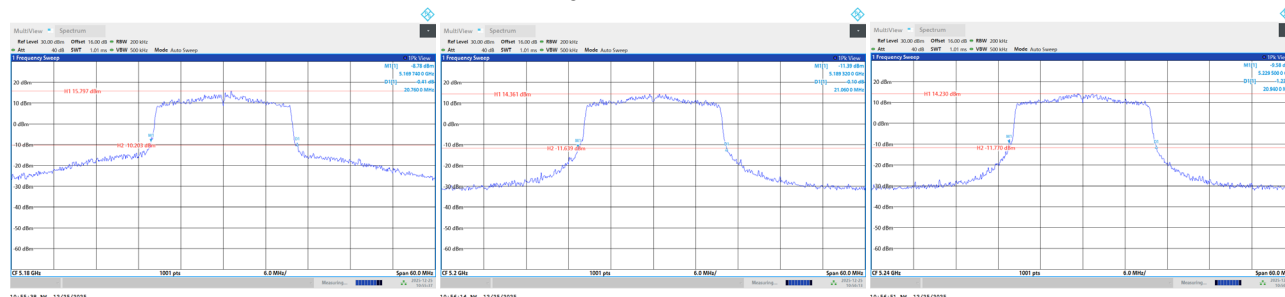


99 % Occupied Bandwidth

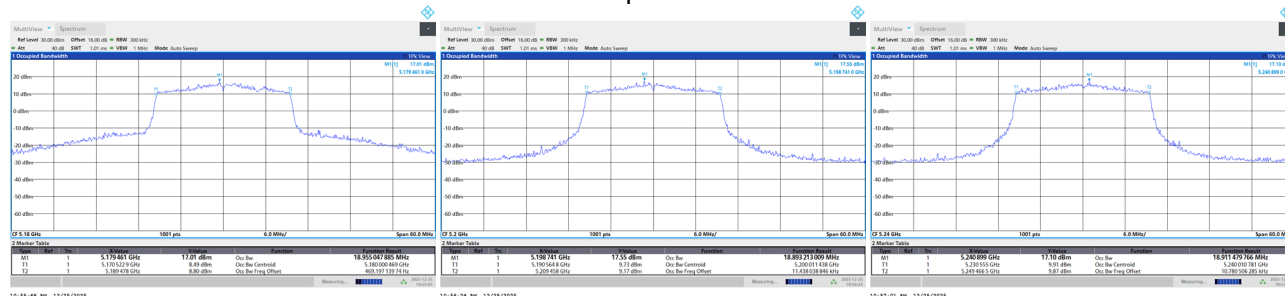


|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-1_TX AX(HE40) Mode |
|-----------|-------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 38      | 5190            | 50.900                | 38.085                        |
| 46      | 5230            | 44.300                | 38.034                        |



CH38

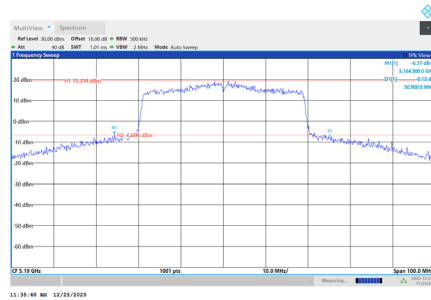

CH46  
26 dB Bandwidth

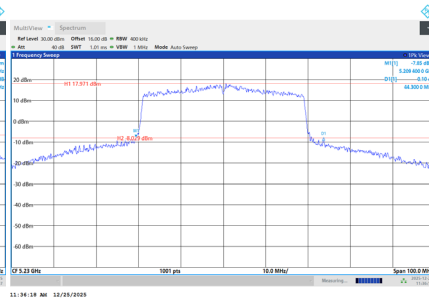


99 % Occupied Bandwidth

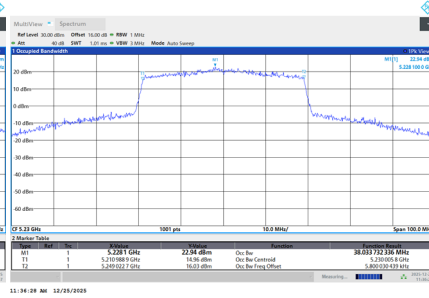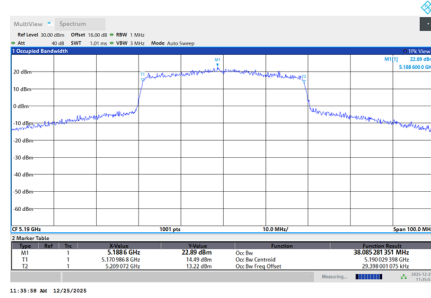


|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-1_TX AX(HE80) Mode |
|-----------|-------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 42      | 5210            | 103.600               | 77.848                        |

## CH42 26 dB Bandwidth

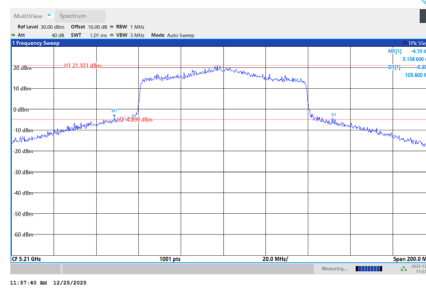

## 99 % Occupied Bandwidth

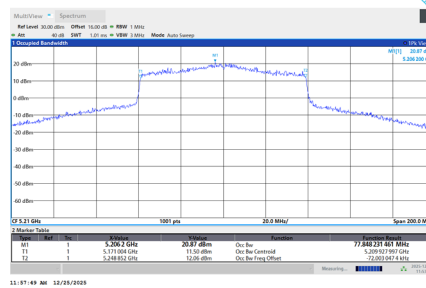


|           |                   |
|-----------|-------------------|
| Test Mode | UNII-2A_TX A Mode |
|-----------|-------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 52      | 5260            | 18.900                | 16.389                        |
| 60      | 5300            | 19.140                | 16.398                        |
| 64      | 5320            | 19.140                | 16.398                        |


CH52

CH60  
26 dB Bandwidth

CH64

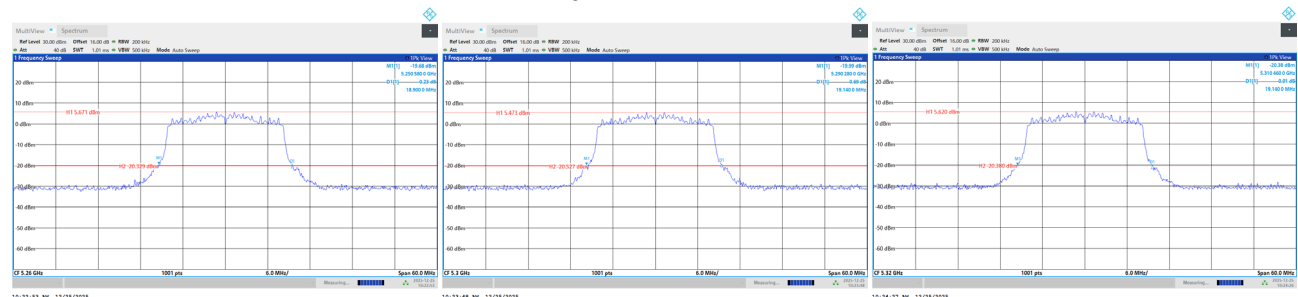

99 % Occupied Bandwidth

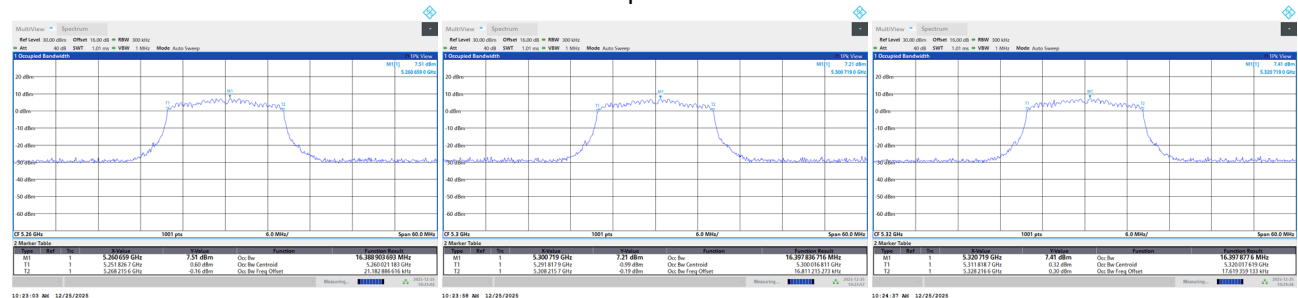


|           |                           |
|-----------|---------------------------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode |
|-----------|---------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 52      | 5260            | 20.400                | 17.580                        |
| 60      | 5300            | 19.920                | 17.595                        |
| 64      | 5320            | 20.340                | 17.585                        |


CH52

CH60  
26 dB Bandwidth

CH64

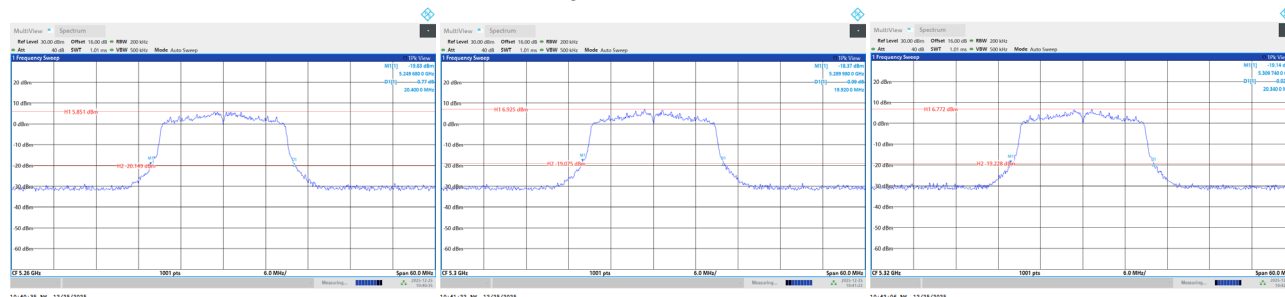

99 % Occupied Bandwidth

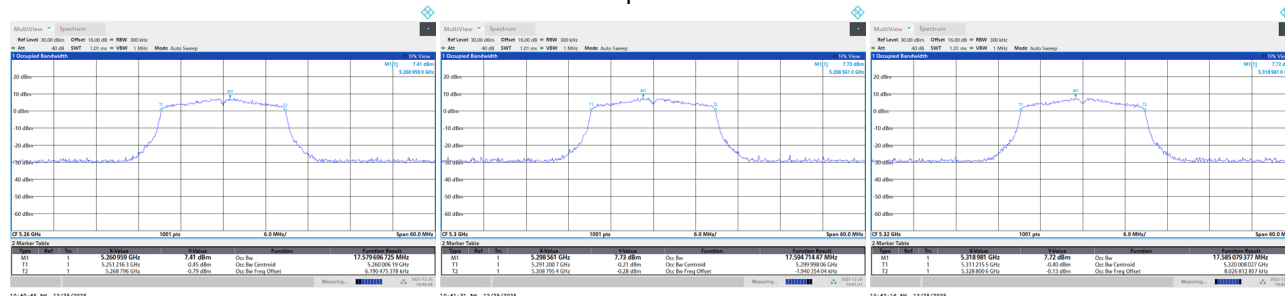


|           |                           |
|-----------|---------------------------|
| Test Mode | UNII-2A_TX AC(VHT40) Mode |
|-----------|---------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 54      | 5270            | 39.400                | 36.061                        |
| 62      | 5310            | 39.300                | 36.067                        |

CH54

CH62  
26 dB Bandwidth

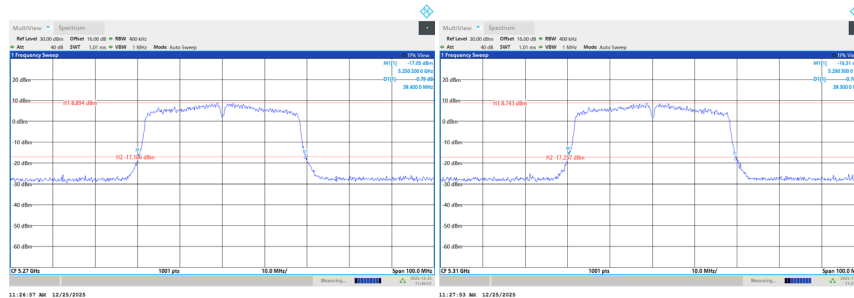


99 % Occupied Bandwidth

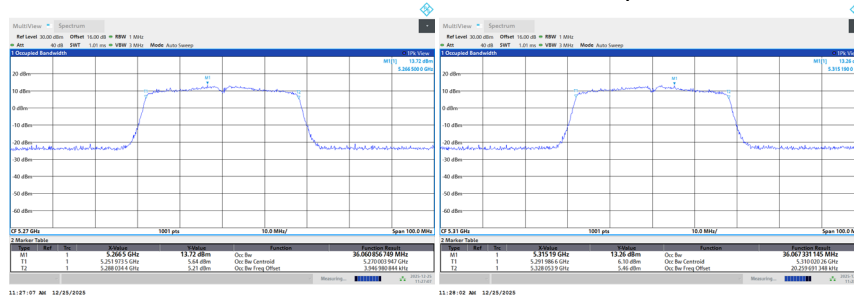

|           |                           |
|-----------|---------------------------|
| Test Mode | UNII-2A_TX AC(VHT80) Mode |
|-----------|---------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 58      | 5290            | 81.400                | 74.968                        |

## CH58 26 dB Bandwidth

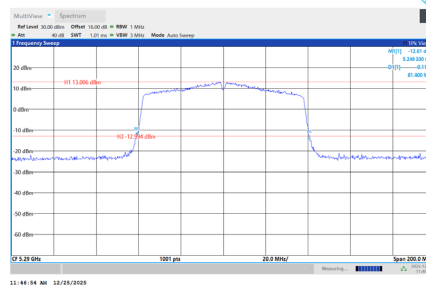

## 99 % Occupied Bandwidth

