



Appendix A. Test Result of AC Power Line Conducted Emission

Transmit Mode (DC 5V)

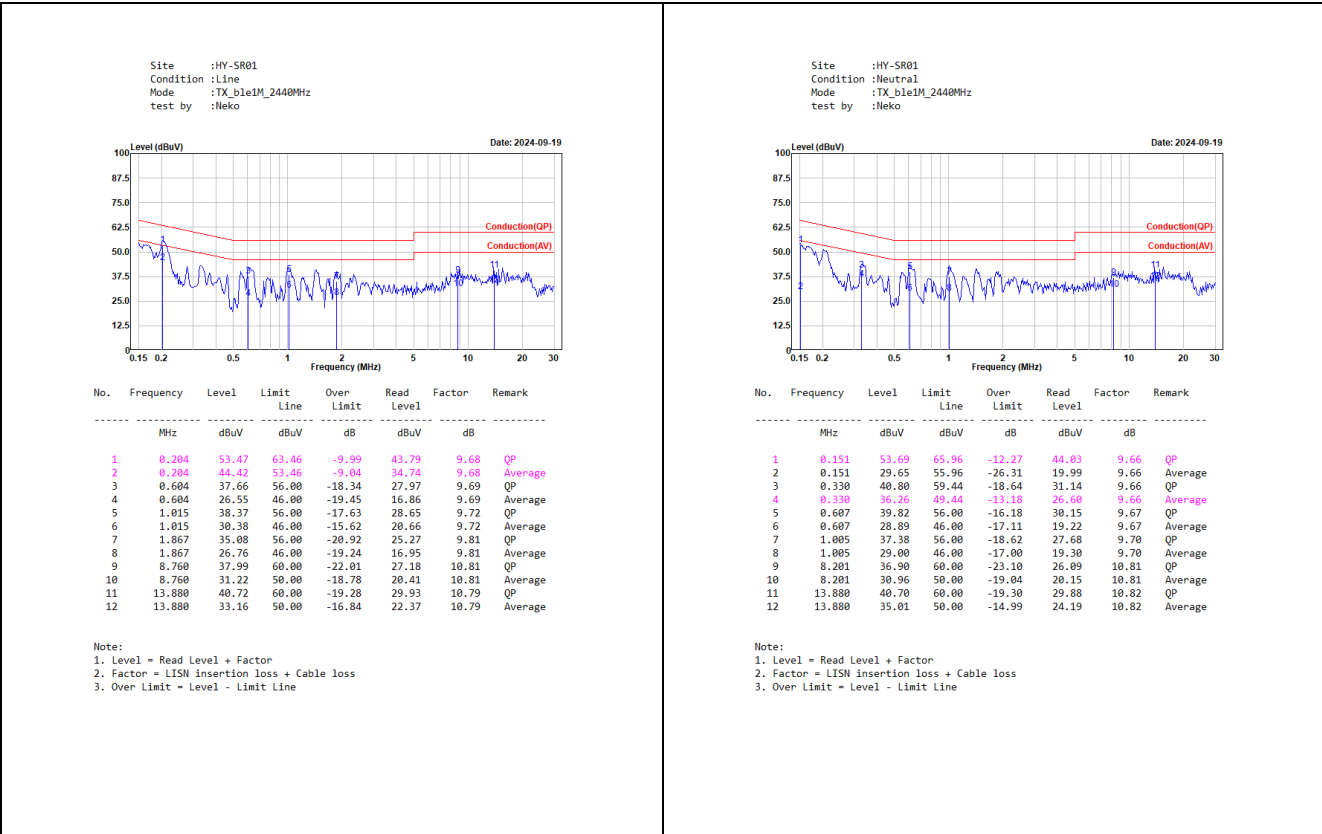


Transmit Mode (DC 12V)

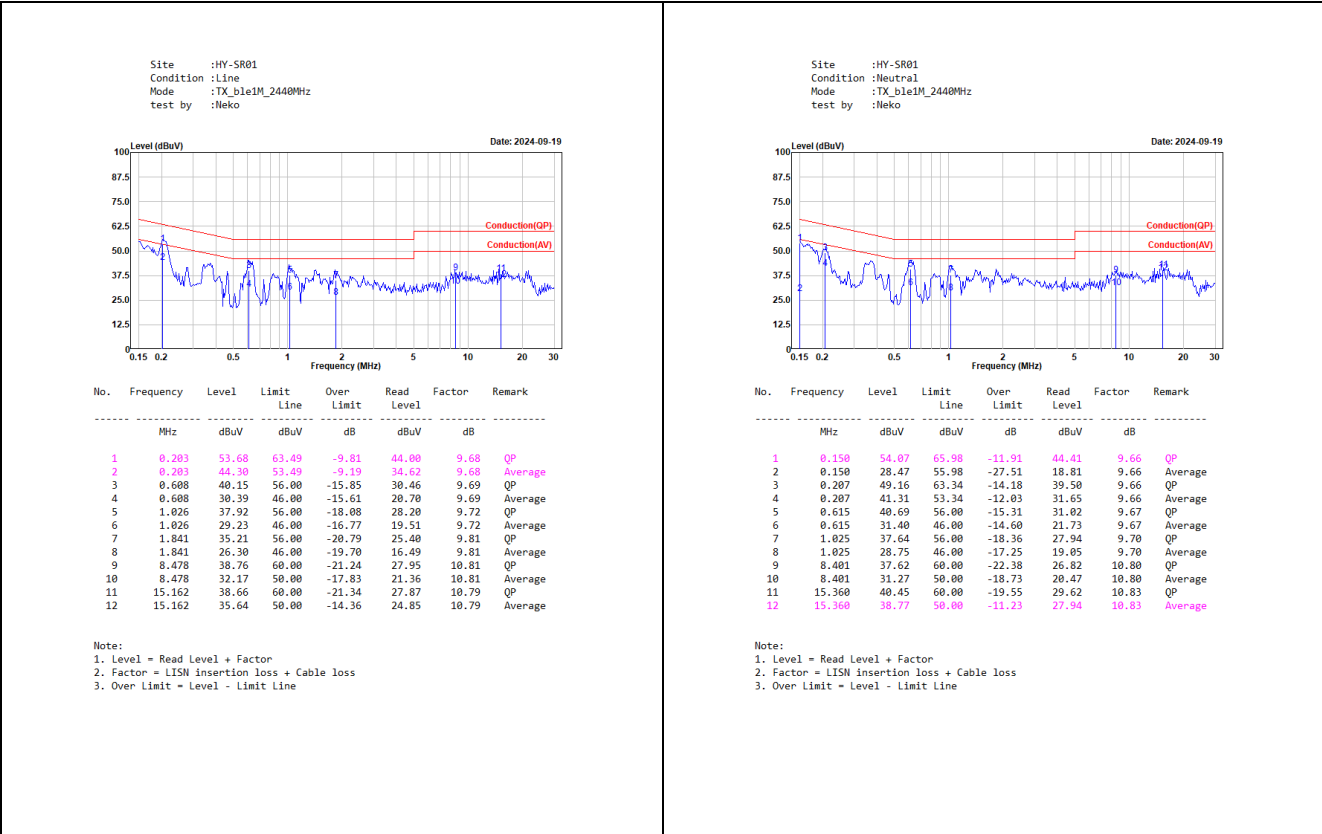

Transmit Mode (DC 20V)


Site :HY-SR01
Condition :Line
Mode :TX_ble1M_2440MHz
test by :Neko

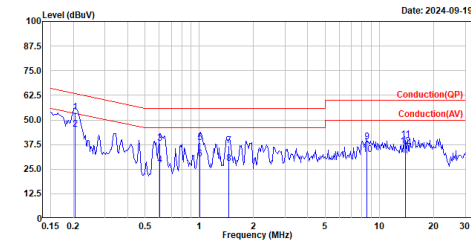

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.204	54.02	63.44	-9.42	44.34	9.68	QP
2	0.204	45.17	53.44	-8.27	35.49	9.68	Average
3	0.604	38.26	56.00	-17.74	28.57	9.69	QP
4	0.604	27.09	46.00	-18.91	17.40	9.69	Average
5	1.009	38.64	56.00	-17.36	28.92	9.72	QP
6	1.009	30.29	46.00	-15.71	20.57	9.72	Average
7	1.461	36.95	56.00	-19.05	27.18	9.77	QP
8	1.461	28.04	46.00	-17.96	18.27	9.77	Average
9	8.481	38.98	60.00	-21.02	28.17	10.81	QP
10	8.481	32.44	50.00	-17.56	21.63	10.81	Average
11	13.880	39.98	60.00	-20.02	29.19	10.79	QP
12	13.880	36.57	50.00	-13.43	25.78	10.79	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Site :HY-SR01
Condition :Neutral
Mode :TX_ble1M_2440MHz
test by :Neko

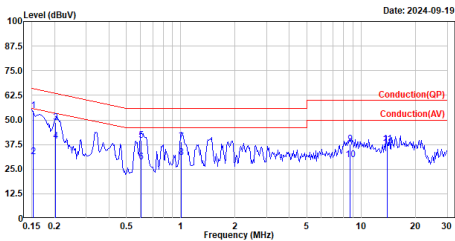


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.153	54.61	65.84	-11.23	44.95	9.66	QP
2	0.153	31.17	55.84	-24.67	21.51	9.66	Average
3	0.203	48.56	63.49	-14.93	38.90	9.66	QP
4	0.203	39.21	53.49	-14.28	29.55	9.66	Average
5	0.606	39.56	56.00	-16.44	29.89	9.67	QP
6	0.606	28.54	46.00	-17.46	18.87	9.67	Average
7	1.012	38.86	56.00	-17.14	29.16	9.70	QP
8	1.012	30.81	46.00	-15.19	21.11	9.70	Average
9	8.666	37.77	60.00	-22.23	26.97	10.80	QP
10	8.666	29.74	50.00	-20.26	18.94	10.80	Average
11	13.920	37.80	60.00	-22.20	26.98	10.82	QP
12	13.920	35.71	50.00	-14.29	24.89	10.82	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Normal Mode (DC 5V)


Site :HY-SR01
Condition :Line
Mode :Normal_5V
test by :Jimmy

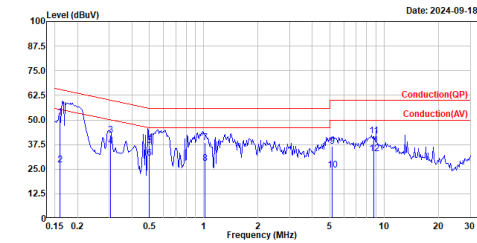

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.159	51.50	65.50	-14.00	41.86	9.64	QP
2	0.159	27.32	55.50	-28.18	17.68	9.64	Average
3	0.305	42.27	60.10	-17.83	32.64	9.63	QP
4	0.305	36.46	50.10	-13.64	26.83	9.63	Average
5	0.499	37.05	56.02	-18.97	27.41	9.64	QP
6	0.499	30.46	46.02	-15.56	20.82	9.64	Average
7	1.018	38.56	56.00	-17.44	28.91	9.65	QP
8	1.018	28.04	46.00	-17.96	18.39	9.65	Average
9	5.142	36.44	60.00	-23.56	26.77	9.67	QP
10	5.142	24.41	50.00	-25.59	14.74	9.67	Average
11	8.750	41.88	60.00	-18.12	31.98	9.90	QP
12	8.750	32.98	50.00	-17.02	23.08	9.90	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Site :HY-SR01
Condition :Neutral
Mode :Normal_5V
test by :Jimmy

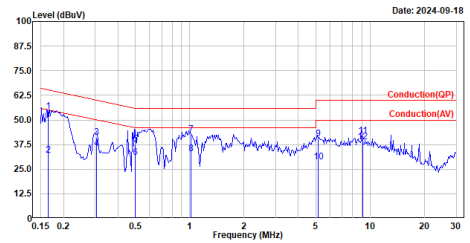


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.164	54.51	65.24	-10.73	44.89	9.62	QP
2	0.164	32.03	55.24	-23.21	22.41	9.62	Average
3	0.305	41.07	60.11	-19.04	31.46	9.61	QP
4	0.305	35.54	50.11	-14.57	25.93	9.61	Average
5	0.498	37.66	56.03	-18.37	28.04	9.62	QP
6	0.498	31.05	46.03	-14.98	21.43	9.62	Average
7	1.014	42.77	56.00	-13.23	33.14	9.63	QP
8	1.014	32.78	46.00	-13.22	23.15	9.63	Average
9	5.144	40.52	60.00	-19.48	30.87	9.65	QP
10	5.144	28.73	50.00	-21.27	19.08	9.65	Average
11	9.055	42.07	60.00	-17.93	32.16	9.91	QP
12	9.055	38.85	50.00	-11.15	28.94	9.91	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Normal Mode (DC 12V)


Site :HY-SR01
Condition :Line
Mode :Normal_12V
test by :Jimmy

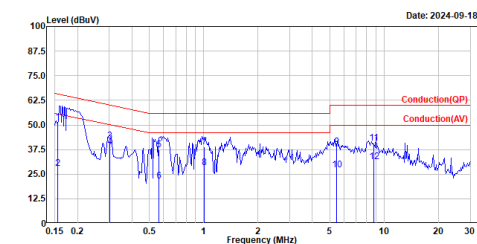

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.156	51.38	65.69	-14.31	41.74	9.64	QP
2	0.156	27.76	55.69	-27.93	18.12	9.64	Average
3	0.303	42.06	60.17	-18.11	32.43	9.63	QP
4	0.303	38.96	50.17	-11.21	29.33	9.63	Average
5	0.565	37.27	56.00	-18.73	27.63	9.64	QP
6	0.565	21.60	46.00	-24.40	11.96	9.64	Average
7	1.011	38.76	56.00	-17.24	29.11	9.65	QP
8	1.011	28.31	46.00	-17.69	18.66	9.65	Average
9	5.431	38.87	60.00	-21.13	29.19	9.68	QP
10	5.431	27.04	50.00	-22.96	17.36	9.68	Average
11	8.746	40.69	60.00	-19.31	30.79	9.90	QP
12	8.746	31.46	50.00	-18.54	21.96	9.90	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Site :HY-SR01
Condition :Neutral
Mode :Normal_12V
test by :Jimmy

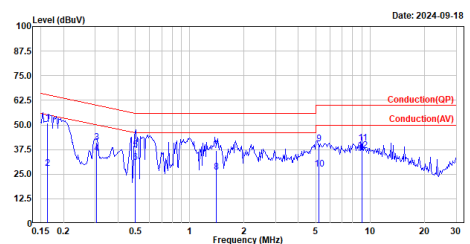


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.163	51.06	65.31	-14.25	41.44	9.62	QP
2	0.163	28.00	55.31	-27.31	18.38	9.62	Average
3	0.306	41.06	60.08	-19.02	31.45	9.61	QP
4	0.306	35.51	50.08	-14.57	25.90	9.61	Average
5	0.498	37.24	56.04	-18.80	27.62	9.62	QP
6	0.498	31.05	46.04	-14.99	21.43	9.62	Average
7	1.405	37.12	56.00	-18.88	27.50	9.62	QP
8	1.405	26.10	46.00	-19.90	16.48	9.62	Average
9	5.192	40.37	60.00	-19.63	30.72	9.65	QP
10	5.192	27.50	50.00	-22.50	17.85	9.65	Average
11	9.052	40.74	60.00	-19.26	30.84	9.90	QP
12	9.052	36.85	50.00	-13.15	26.95	9.90	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Normal Mode (DC 20V)

Site :HY-SR01
Condition :Line
Mode :Normal_20V
test by :Jimmy

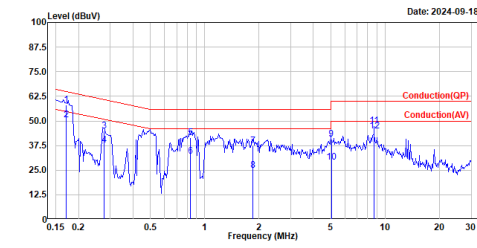


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.171	58.23	64.92	-6.69	48.59	9.64	QP
2	0.171	50.47	54.92	-4.45	40.83	9.64	Average
3	0.276	44.86	60.92	-16.06	35.22	9.64	QP
4	0.276	37.87	50.92	-13.05	28.23	9.64	Average
5	0.838	41.58	56.00	-14.42	31.93	9.65	QP
6	0.838	32.21	46.00	-13.79	22.56	9.65	Average
7	1.842	37.27	56.00	-18.73	27.63	9.64	QP
8	1.842	25.06	46.00	-20.94	15.42	9.64	Average
9	5.029	40.79	60.00	-19.21	31.13	9.66	QP
10	5.029	29.06	50.00	-20.94	19.40	9.66	Average
11	8.649	47.62	60.00	-12.38	37.73	9.89	QP
12	8.649	44.89	50.00	-5.11	35.00	9.89	Average

Note:

1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Site :HY-SR01
Condition :Neutral
Mode :Normal_20V
test by :Jimmy

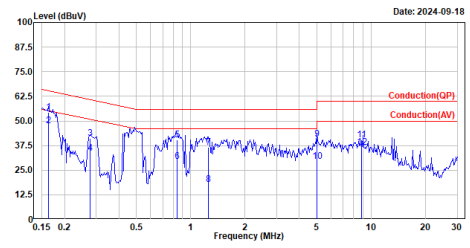


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.163	54.33	65.33	-11.00	44.71	9.62	QP
2	0.163	47.45	55.33	-7.88	37.83	9.62	Average
3	0.278	41.24	60.87	-19.63	31.62	9.62	QP
4	0.278	33.58	50.87	-17.29	23.96	9.62	Average
5	0.840	40.56	56.00	-15.44	30.93	9.63	QP
6	0.840	29.50	46.00	-16.50	19.87	9.63	Average
7	1.248	36.73	56.00	-19.27	27.10	9.63	QP
8	1.248	17.76	46.00	-28.24	8.13	9.63	Average
9	5.028	40.81	60.00	-19.19	31.17	9.64	QP
10	5.028	29.32	50.00	-20.68	19.68	9.64	Average
11	8.848	40.36	60.00	-19.64	30.47	9.89	QP
12	8.848	36.62	50.00	-13.38	26.73	9.89	Average

Note:

1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Appendix B. Test Result of 6dB Bandwidth

Modulation	Frequency (MHz)	Measured Value (kHz)	Limit (kHz)	Result
GFSK	2402	634	>500	Pass
	2440	629	>500	Pass
	2480	629	>500	Pass

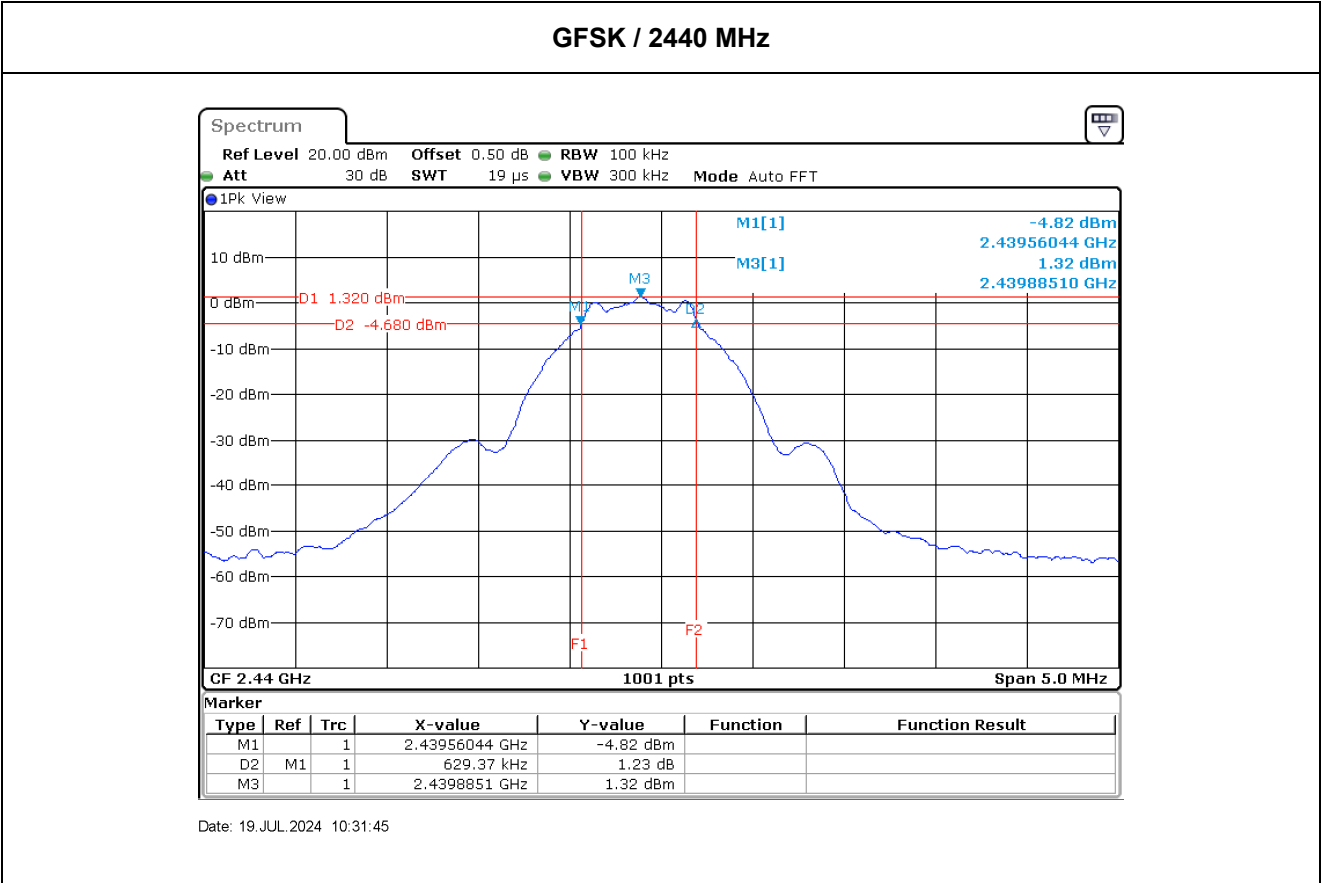


Appendix C. Test Result of Maximum Conducted Output Power


Modulation	Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	2402	1.61	30.00	Pass
	2440	-1.35	30.00	Pass
	2480	-2.95	30.00	Pass

Appendix D. Test Result of Power Spectral Density


Modulation	Frequency (MHz)	Measure Value (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK	2402	-14.58	8.00	Pass
	2440	-14.02	8.00	Pass
	2480	-15.46	8.00	Pass

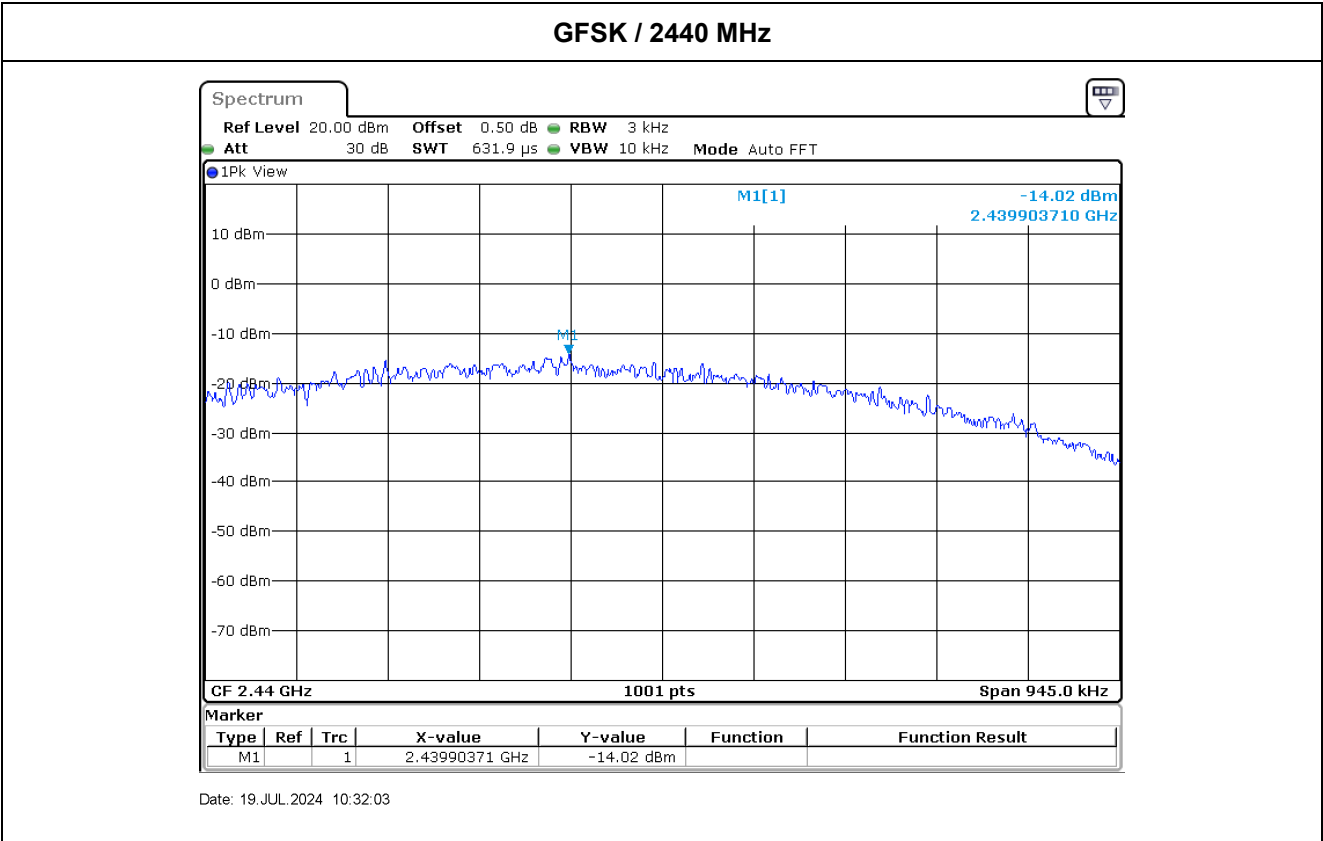

Appendix E. Test Result of Antenna Port Conducted Emission

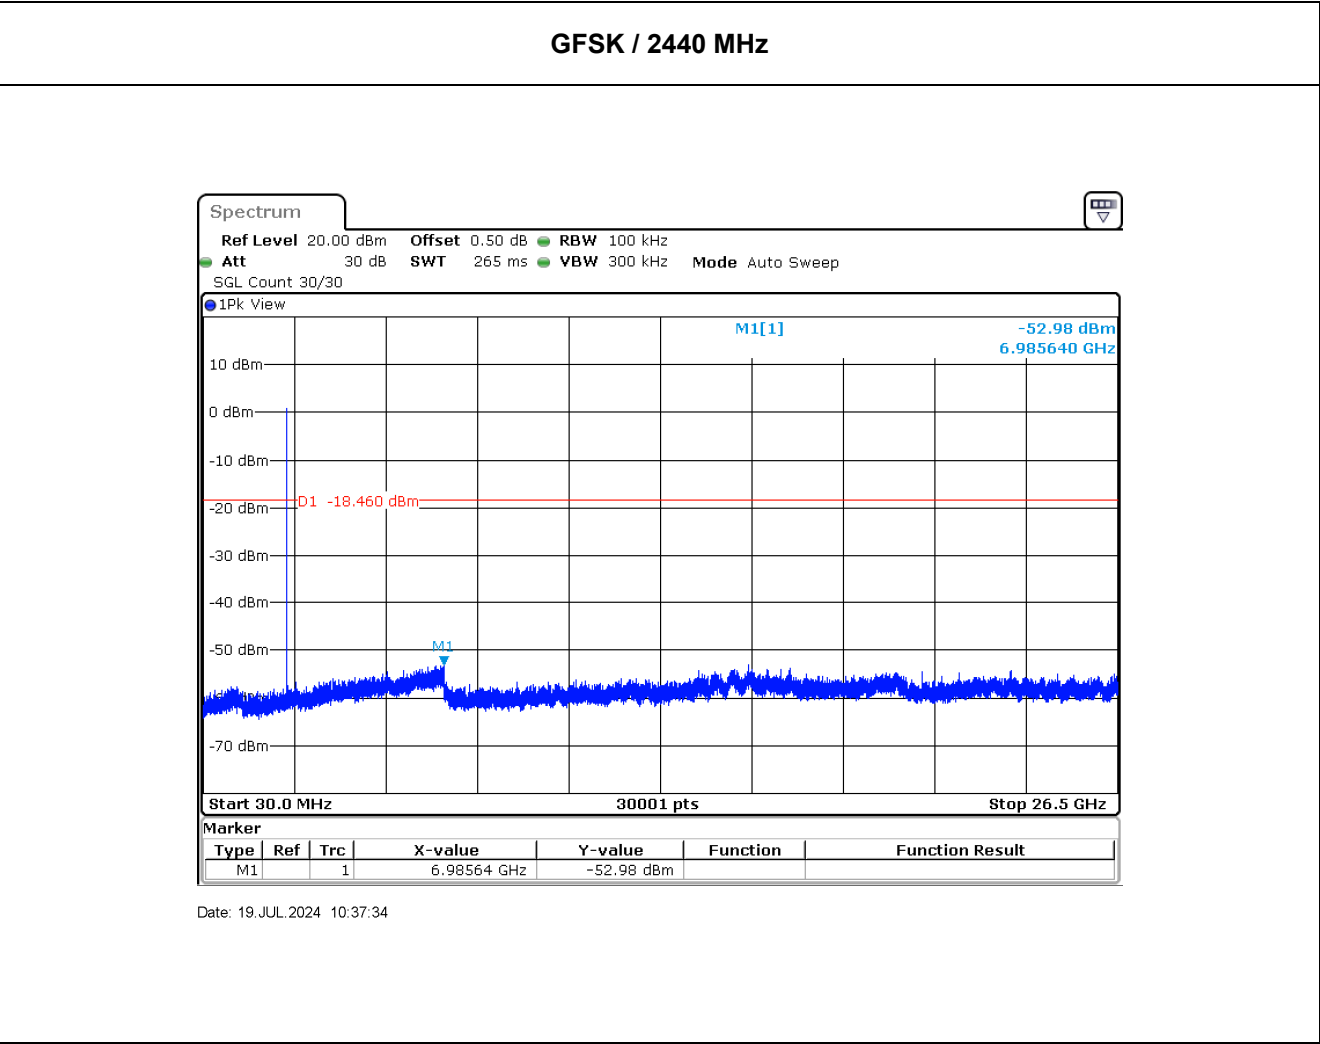

Modulation	Measurement Level Δ (dB)	Result
GFSK	> 20	PASS

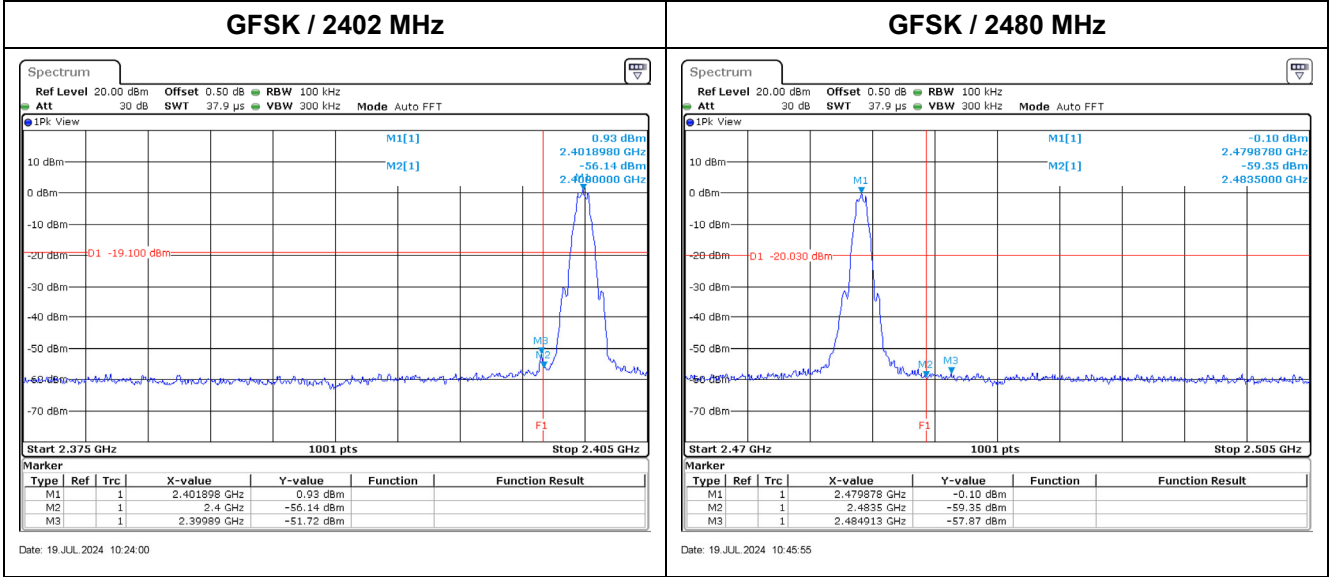


Appendix F. Test Result of Radiated Emission

Transmit Mode

</

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ble1M_2480MHz
TEST BY :Peter

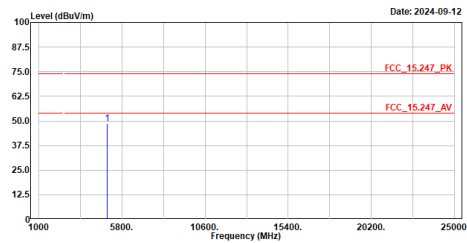


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	48.61	74.00	-25.39	62.93	-14.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ble1M_2480MHz
TEST BY :Peter

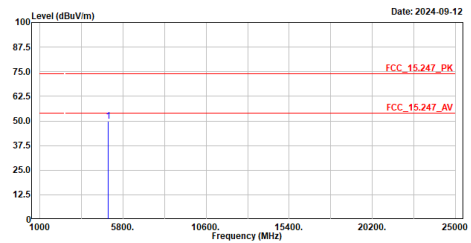


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	49.68	74.00	-24.32	64.00	-14.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ble1M_2440MHz_5V
TEST BY :Peter

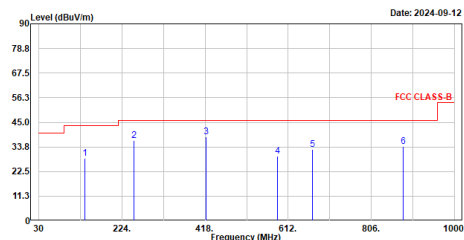


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	137.670	28.44	43.50	-15.06	53.03	-24.59	QP
2	252.130	36.59	46.00	-9.41	61.36	-24.77	QP
3	419.940	38.51	46.00	-7.49	58.40	-19.89	QP
4	587.750	29.62	46.00	-16.38	45.38	-15.76	QP
5	668.260	32.76	46.00	-13.24	47.35	-14.59	QP
6	880.690	33.81	46.00	-12.19	45.80	-11.99	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ble1M_2440MHz_5V
TEST BY :Peter

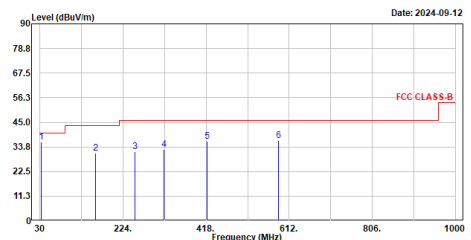


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	137.670	28.44	43.50	-15.06	53.03	-24.59	QP
2	252.130	36.59	46.00	-9.41	61.36	-24.77	QP
3	419.940	38.51	46.00	-7.49	58.40	-19.89	QP
4	587.750	29.62	46.00	-16.38	45.38	-15.76	QP
5	668.260	32.76	46.00	-13.24	47.35	-14.59	QP
6	880.690	33.81	46.00	-12.19	45.80	-11.99	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b1e1M_2440MHz_12V
TEST BY :Peter

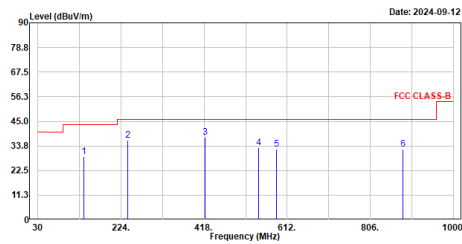


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	137.670	28.94	43.50	-14.56	53.53	-24.59	QP
2	239.520	36.35	46.00	-9.65	61.33	-24.98	QP
3	419.940	37.83	46.00	-8.17	57.72	-19.89	QP
4	545.070	32.89	46.00	-13.11	50.13	-17.24	QP
5	587.750	32.31	46.00	-13.69	48.07	-15.76	QP
6	881.660	32.11	46.00	-13.89	44.06	-11.95	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b1e1M_2440MHz_12V
TEST BY :Peter

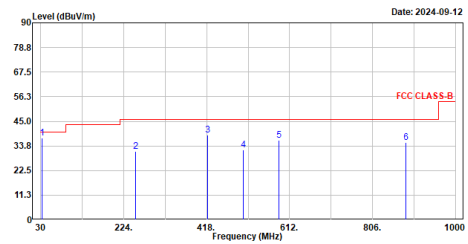


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	33.880	37.20	40.00	-2.80	62.15	-24.95	QP
2	252.130	31.09	46.00	-14.91	55.86	-24.77	QP
3	419.940	38.58	46.00	-7.42	58.47	-19.89	QP
4	504.330	31.82	46.00	-14.18	49.66	-17.84	QP
5	587.750	36.18	46.00	-9.82	51.94	-15.76	QP
6	883.600	35.37	46.00	-10.63	47.24	-11.87	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_b1e1M_2440MHz_20V
TEST BY :Peter

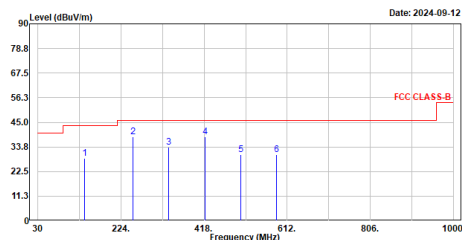


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	138.640	28.54	43.50	-14.96	52.96	-24.42	QP
2	252.130	38.25	46.00	-7.75	63.02	-24.77	QP
3	335.550	33.68	46.00	-12.32	55.55	-21.87	QP
4	419.940	38.29	46.00	-7.71	58.18	-19.89	QP
5	504.330	30.38	46.00	-15.62	48.22	-17.84	QP
6	587.750	30.29	46.00	-15.71	46.85	-15.76	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_b1e1M_2440MHz_20V
TEST BY :Peter

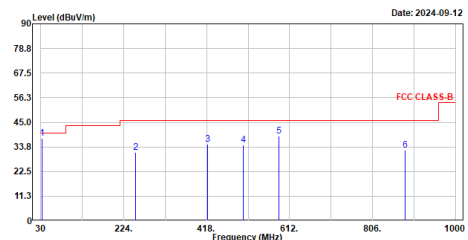


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	33.880	37.53	40.00	-2.47	62.48	-24.95	QP
2	252.130	31.37	46.00	-14.63	56.14	-24.77	QP
3	419.940	35.00	46.00	-11.00	54.89	-19.89	QP
4	504.330	34.66	46.00	-11.34	52.50	-17.84	QP
5	587.750	38.68	46.00	-7.32	54.44	-15.76	QP
6	881.660	32.35	46.00	-13.65	44.30	-11.95	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ble1M_2402MHz
TEST BY :Peter

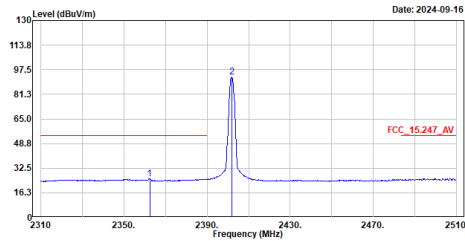

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2362.400	25.56	54.00	-28.44	19.80	5.76	Average
2	2401.800	92.51	-----	-----	86.71	5.80	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ble1M_2402MHz
TEST BY :Peter

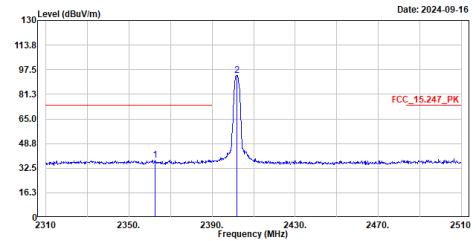

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2362.600	37.75	74.00	-36.25	31.99	5.76	Peak
2	2401.800	93.73	-----	-----	87.93	5.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ble1M_2402MHz
TEST BY :Peter

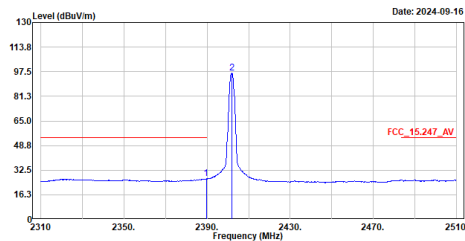

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.600	26.90	54.00	-27.10	21.01	5.89	Average
2	2401.800	96.70	-----	-----	90.90	5.80	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ble1M_2402MHz
TEST BY :Peter

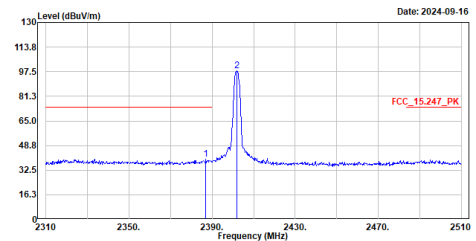

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2387.000	39.63	74.00	-34.37	33.78	5.85	Peak
2	2402.000	97.95	-----	-----	92.15	5.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ble1M_2480MHz
TEST BY :Peter

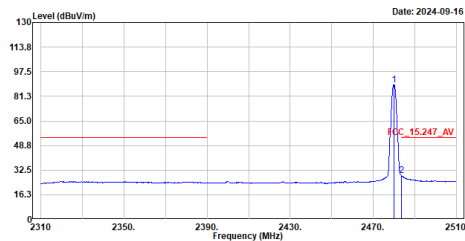

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	88.86	-----	-----	83.14	5.72	Average
2	2483.600	28.75	54.00	-25.25	23.03	5.72	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ble1M_2480MHz
TEST BY :Peter

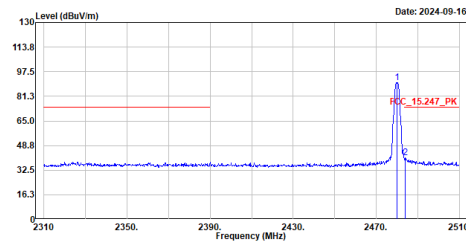

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	90.22	-----	-----	84.50	5.72	Peak
2	2483.800	40.53	74.00	-33.47	34.81	5.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ble1M_2480MHz
TEST BY :Peter

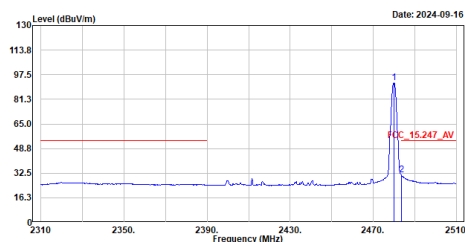

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	92.04	-----	-----	86.32	5.72	Average
2	2483.600	31.25	54.00	-22.75	25.53	5.72	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ble1M_2480MHz
TEST BY :Peter

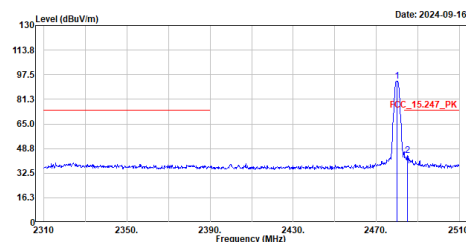


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	93.30	-----	-----	87.58	5.72	Peak
2	2485.000	44.31	74.00	-29.69	38.58	5.73	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Normal Mode


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :Normal
TEST BY :Peter

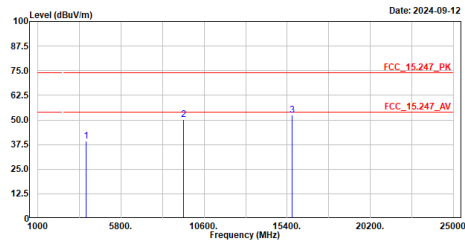

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	3791.400	39.13	74.00	-34.87	55.47	-16.34	Peak
2	9430.300	50.31	74.00	-23.69	56.58	-6.27	Peak
3	15677.000	52.31	74.00	-21.69	53.47	-1.16	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :Normal
TEST BY :Peter

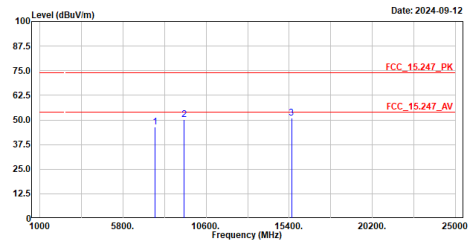

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	7655.500	46.44	74.00	-27.56	57.04	-10.60	Peak
2	9313.000	50.31	74.00	-23.69	56.60	-6.29	Peak
3	15535.000	51.03	74.00	-22.97	52.31	-1.28	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :Normal_5V
TEST BY :Peter

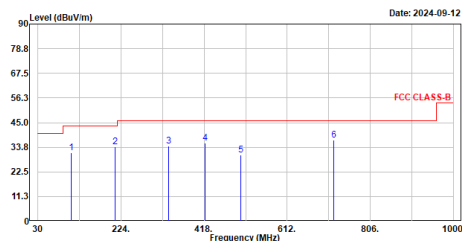

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	108.570	31.32	43.50	-12.18	58.38	-27.06	QP
2	210.420	33.81	43.50	-9.69	60.25	-26.44	QP
3	335.550	34.41	46.00	-11.59	56.28	-21.87	QP
4	419.940	35.70	46.00	-10.30	55.59	-19.89	QP
5	504.330	30.33	46.00	-15.67	48.17	-17.84	QP
6	721.610	37.08	46.00	-8.92	50.69	-13.61	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :Normal_5V
TEST BY :Peter

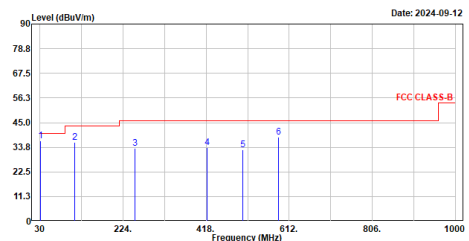

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	30.970	36.64	40.00	-3.36	61.91	-25.27	QP
2	111.480	36.05	43.50	-7.45	62.96	-26.91	QP
3	252.130	33.42	46.00	-12.58	58.19	-24.77	QP
4	419.940	33.51	46.00	-12.49	53.40	-19.89	QP
5	504.330	32.60	46.00	-13.40	50.44	-17.84	QP
6	587.750	38.22	46.00	-7.78	53.98	-15.76	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :Normal_12V
TEST BY :Peter

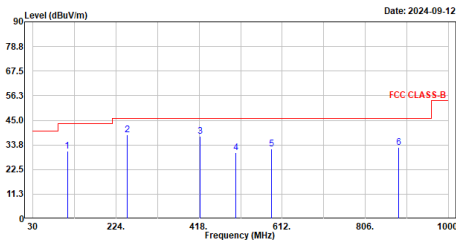


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	110.510	30.84	43.50	-12.66	57.84	-27.00	QP
2	250.190	38.43	46.00	-7.57	63.25	-24.82	QP
3	419.940	37.56	46.00	-8.44	57.45	-19.89	QP
4	504.330	30.18	46.00	-15.82	48.02	-17.84	QP
5	587.750	32.02	46.00	-13.98	47.78	-15.76	QP
6	884.570	32.67	46.00	-13.33	44.50	-11.83	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :Normal_12V
TEST BY :Peter

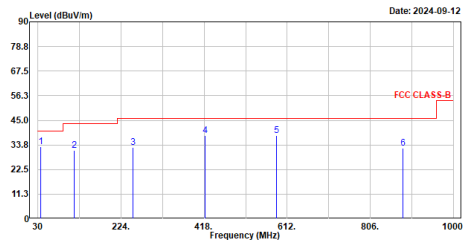


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	36.790	32.95	40.00	-7.05	57.63	-24.68	QP
2	114.390	31.25	43.50	-12.25	57.85	-26.60	QP
3	252.130	32.47	46.00	-13.53	57.24	-24.77	QP
4	419.940	37.89	46.00	-8.11	57.78	-19.89	QP
5	587.750	37.91	46.00	-8.09	53.67	-15.76	QP
6	882.630	32.17	46.00	-13.83	44.07	-11.90	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :Normal_20V
TEST BY :Peter

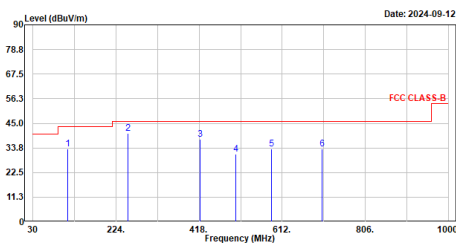


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	111.480	33.27	43.50	-10.23	60.18	-26.91	QP
2	252.130	40.29	46.00	-5.71	65.06	-24.77	QP
3	419.940	37.74	46.00	-8.26	57.63	-19.89	QP
4	504.330	31.00	46.00	-15.00	48.84	-17.84	QP
5	587.750	33.44	46.00	-12.56	49.20	-15.76	QP
6	705.120	33.31	46.00	-12.69	47.26	-13.95	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :Normal_20V
TEST BY :Peter

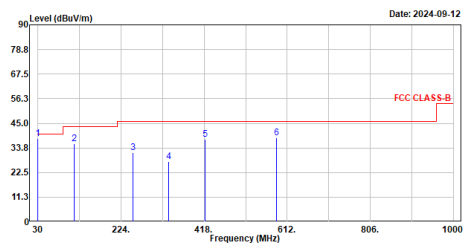

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	30.000	37.94	40.00	-2.06	63.23	-25.29	QP
2	115.360	35.55	43.50	-7.95	62.13	-26.58	QP
3	252.130	31.58	46.00	-14.42	56.35	-24.77	QP
4	335.550	27.55	46.00	-18.45	49.42	-21.87	QP
5	419.940	37.69	46.00	-8.31	57.58	-19.89	QP
6	587.750	38.53	46.00	-7.47	54.29	-15.76	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.