



Product Specification

JAH-S100A

PCB Pattern Antenna

Supplier : ART SIGNAL Co.,LTD.



R&D Center : 1008-A, Woolim Lion's Valley 2nd, 146-8, Sangdaewon-dong,
Jungwon-gu, Seongnam-si, Gyeonggi-do, Korea.

Tel : 070-4414-7188 **Fax :** 031-734-7188

	Description			
	JAH-S100A PCB Pattern Antenna Product Specification			
Specification No.	Customer.	Rev.	Date	
	(주)그길	1.0	Oct. 02, 2026	

ANTENNA APPROVAL

Product Name	JAH-S100A PCB Pattern Antenna
Model Name / Freq.	JAH-S100A / 2400~2485MHz
Antenna PART No.	
Customer PART No.	
Customer	(주)그길
Supplier	(주)아트시그널

RF PART		ME PART		QA PART	
Submitted	Approval	Submitted	Approval	Submitted	Approval
					



이 문서는 (주)아트시그널에서 대외비로 발행 되었으며, (주)아트시그널의 사전 허가 없이 이 서류의 일부분 또는 전체를 재 발행 하지 않는다. 여기서 포함하고 있는 정보는 (주)아트시그널의 소유이며, 제출된 목적 이외의 용도나 (주)아트시그널의 사전 허가 없이 일부 또는 전체가 공개되지 않는다.

 Antenna Total Solution	Description			
	JAH-S100A PCB Pattern Antenna Product Specification			
Specification No.	Customer.	Rev.	Date	
	(주)그길	1.0	Oct. 02, 2026	

Table of Contents

1 Log of Changes	4
2 Part Number List	4
3 Product Description& Terminology	5
3.1 Description.....	5
3.2 Product Number	5
3.3 Units, Definitions & Abbreviations.....	5
3.4 Co-ordinates System	5
4 Electrical Properties	6
4.1 Specification.....	6
4.2 Impedance	6
4.3 Matching Circuit	7
4.4 V.S.W.R	8
4.5 Directive ness	8
4.6 Gain	8
5 Electric Performance data.....	9
5.1 V.S.W.R.	9
5.2 Radiation Pattern	10
6 Measurement Procedure	11
7 Measurement Equipment.....	12

 Antenna Total Solution	Description			
	JAH-S100A PCB Pattern Antenna Product Specification			
Specification No.	Customer.	Rev.	Date	
	(주)그길	1.0	Oct. 02, 2026	

1 Log of Changes

NO	Date	Mark	Changes	Remark	Rev.
1	2026.10.02				1.0
2					
3					
4					
5					
6					
7					

2 PART NUMBER LIST

No.	PART NO.	Color & Appearance	ART-SIGNAL Antenna Product Number	Remark
1	?? PCB Pattern Ant.			
2				
3				
4				
5				
6				

 Antenna Total Solution	Description			
	JAH-S100A PCB Pattern Antenna Product Specification			
Specification No.	Customer.	Rev.	Date	
	(주)그길	1.0	Oct. 02, 2026	

3 Product Description & Terminology

3.1 Description

This is the product specification of Internal Antenna applied to Set.

3.2 Product Number

ART SIGNAL Antenna Part Number

3.3 Unit, Definitions & Abbreviations

SI unit will be used, unless any specialties are announced

Tx	Transmit Band
Rx	Receive Band
PCB	Printed Circuit Board
VSWR	Voltage Standing Wave Ratio
dBi	Antenna gain in dB relative to a isotropic antenna
Room Temperature	+20 ± 3°C
CW	Clock Wise
G	Acceleration of gravity 9.82 m/s ²
RH	Relative Humidity
gf / kgf	Gram weight (1gf=980.665dyn) / Kilogram weight (1kgf=9.80665N)
Ph	Potential of hydrogen
F	Force
T	Torque

3.4 Co-ordinates System





Figure 3.4.1 Coordinate within the Handset

 ART SIGNAL Antenna Total Solution	Description			
	JAH-S100A PCB Pattern Antenna Product Specification			
Specification No.	Customer.	Rev.	Date	
	(주)그길	1.0	Oct. 02, 2026	

4 Electrical Properties

4.1 Specification

Item		Specifications
Antenna	Center Frequency	2400~2485 MHz±1MHz
	Band Width	85MHz
	Polarization	Linear (Omni)
	Dimension	
	Working Temperature	-20~80℃
	Storage Temperature	-20~40℃

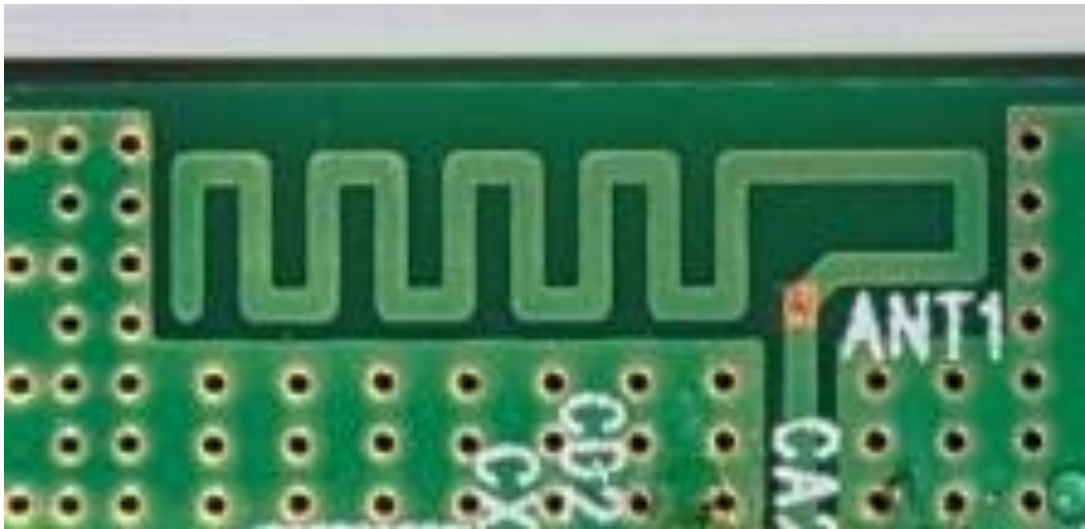

Antenna Picture

 Antenna Total Solution	Description			
	Specification No.	Customer.	Rev.	Date
		(주)그길	1.0	Oct. 02, 2026

4.2 Impedance`

4.2.1 Nominal Impedance

- $R = 50\Omega$

4.2.2 Measuring Method

By using Network analyzer , connect the antenna-installed handset to the reflection Point of Analyzer and measure the impedance value within the designated frequency band.


Testing is corresponded to the figure 4.2.1



Figure 4.2.1 Test by network analyzer

4.3 Matching Circuit

Matching Circuit is composed in free space of 4.1 frequency band while satisfying customer's Requirements. Matching Circuit is corresponded to the figure 4.3.1

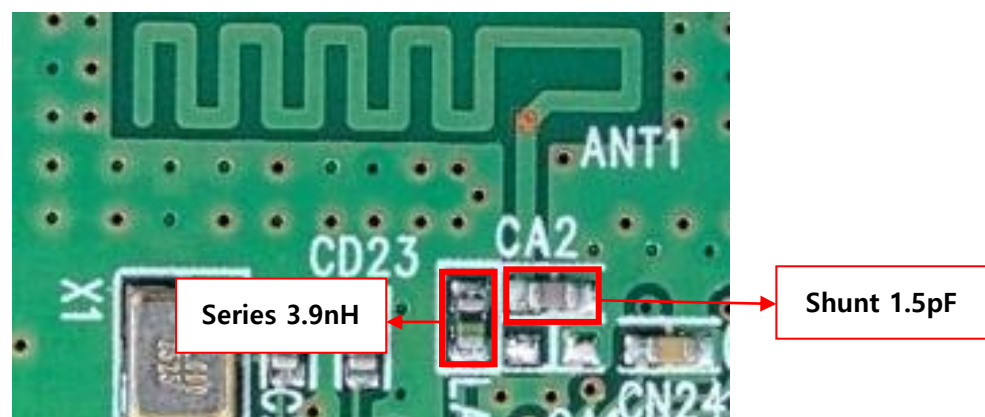

 Antenna Total Solution	Description JAH-S100A PCB Pattern Antenna Product Specification			
	Specification No.	Customer. ☞그길	Rev. 1.0	Date Oct. 02, 2026

4.4 V.S.W.R

Impedance Matching optimization is performed under the below mentioned environment.

4.4.1 Free Space Environment

Service(MHz)		2400	2485
Mode			
VSWR	TEST DATA	4.41	1.30
	SPEC	4.91	1.80

4.4.2 Measuring Method

Connect(soldering) 50Ω copper cable to the 50Ω spot in handset. To minimize the loss of transmission, copper cable is used.

Including PCB, the handset shouldn't be different from the one, which will be used for mass production.

Specification should be the same for all frequency bands. Free space means that handset is put on the surface of no conducting plastic.

4.5 Directive ness

Omni-directional


4.6 Gain

Free Space

Service(MHz) Mode(dBi)	Left Antenna					
	Freq.(MHz)	2400	2420	2440	2460	2485
PEAK		-6.05	-4.63	-3.31	-2.49	-2.33
AVG		-11.24	-10.10	-8.88	-8.09	-8.05
SPEC		-11.74	-10.60	-9.38	-8.59	-8.55

5 Electric Efficiency

5.1 ANT-VSWR

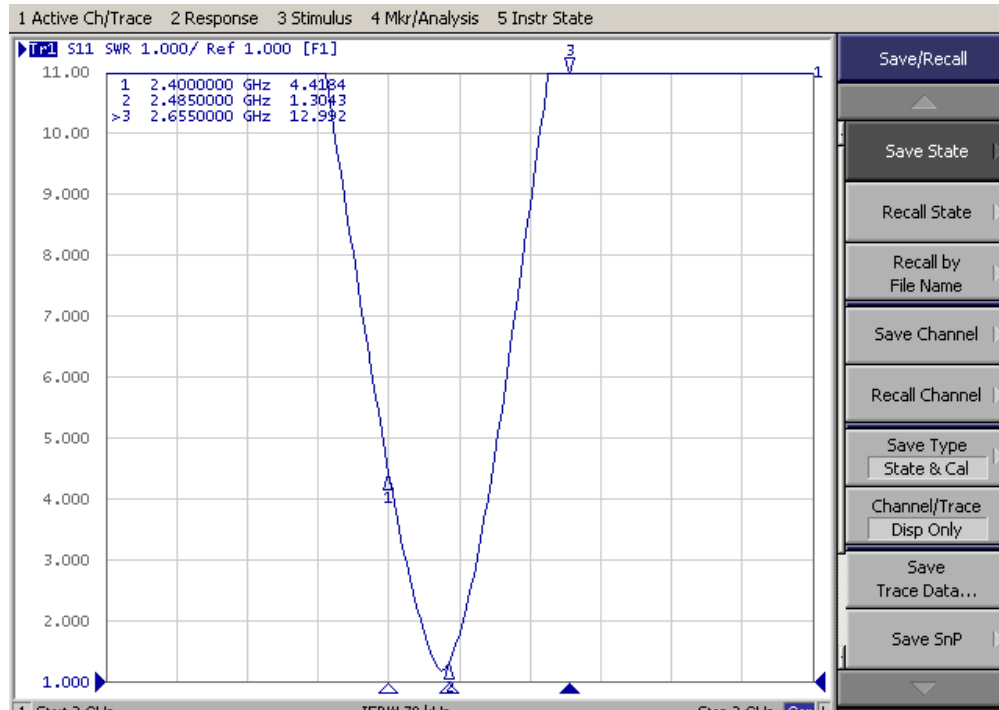


5.2 Radiation Pattern (XY-Plane)


	1	2	3	4	5
Frequency [MHz]	2400	2420	2440	2460	2485
Efficiency [dB]	-11.24	-10.10	-8.88	-8.09	-8.05
Efficiency [%]	7.5	9.8	12.9	15.5	15.7
TRG _θ [dB]	-12.85	-11.82	-10.64	-9.93	-10.24
Gain _{θ Peak} [dB]	-8.43	-7.33	-5.90	-5.14	-5.44
Gain _{θ Min} [dB]	-32.54	-34.80	-36.55	-38.27	-32.96
TRG _φ [dB]	-16.31	-14.95	-13.65	-12.70	-12.07
Gain _{φ Peak} [dB]	-8.75	-7.34	-6.19	-5.51	-5.08
Gain _{φ Min} [dB]	-32.85	-34.70	-35.14	-32.03	-36.86
UHRG [dB]	-14.66	-13.56	-12.37	-11.59	-11.49
UHRG/TRG [%]	45.4	45.0	44.7	44.6	45.3
H-Plane	-15.31	-14.63	-13.89	-13.65	-14.15
E1-Plane, AVG[dB]	-12.34	-11.33	-10.06	-9.29	-9.63
E2-Plane, AVG [dB]	-13.48	-12.51	-11.34	-10.67	-11.20
Peak Gain [dB]	-6.05	-4.63	-3.31	-2.49	-2.33
Directivity [dB]	5.19	5.47	5.56	5.59	5.72
Minimum Gain [dB]	-24.06	-21.98	-19.89	-19.81	-19.50

	Description		
	JAH-S100A PCB Pattern Antenna Product Specification		
Specification No.	Customer.	Rev.	Date
	(주)그길	1.0	Oct. 02, 2026


2400




2420




2440



2460



2485




3D GAIN (H/E1/E2-plane)

 Antenna Total Solution	Description			
	JAH-S100A PCB Pattern Antenna Product Specification			
Specification No.	Customer.	Rev.	Date	
	(주)그길	1.0	Oct. 02, 2026	


6 Measurement Procedure



Network Analyzer을 이용하여 VSWR 측정

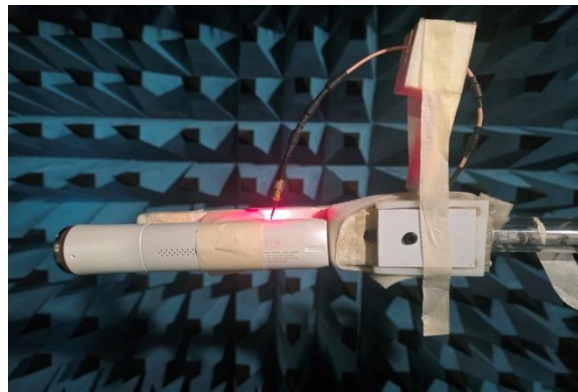

3D Chamber에 set 거치

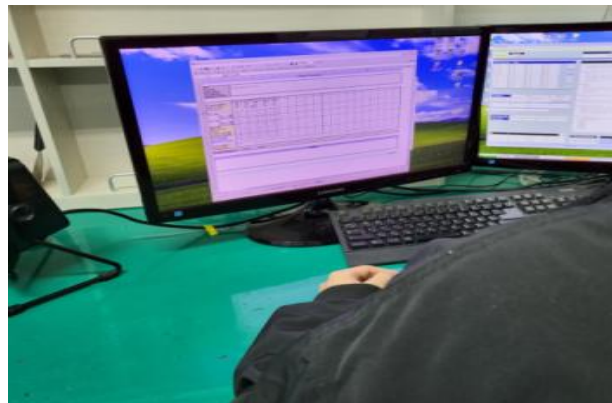

Program을 이용하여 Gain 측정

	Description			
	JAH-S100A PCB Pattern Antenna Product Specification			
Specification No.	Customer.	Rev.	Date	
	(주)그길	1.0	Oct. 02, 2026	

7 Measurement Equipment

Network analyzer



E5071B (Agilent)



8753ES (Agilent)



CTIA 3D OTA Chamber(A+Tech)