


Product specification

Quick Reference Data

	PCB Antenna	
Frequenc Range	2400 ~ 2500GHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr – loss pwr)	
Peak EIRP(dBm)	1.3	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	60.2 %	
Gain (dBi)	1.3 (Avg Gain XY-plane)	
Maximum Power (dBm)	1.7 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Input Impedence(ohm)	50	
Polarization Type	Vertical & Horizontal	
V. S. W. R	< 1.4	

All the technical data and information contained herein are subject to change without prior notice
Antenna Model: CB3S

Antenna Layout & module on the system board

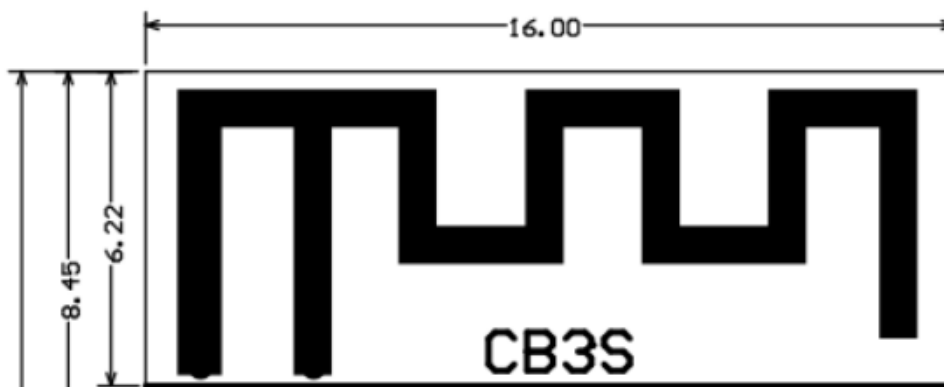

Antenna Gain


Gain Table

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.3	-0.5	1.9	-3.6	1.1	-3.0	60.2 %



Manufacturer: Hangzhou Tuya Information Technology Co., Ltd

Address: Room 701, Building 3, More Center, No. 87 GuDun Road, Hangzhou, Zhejiang, China

Return Loss

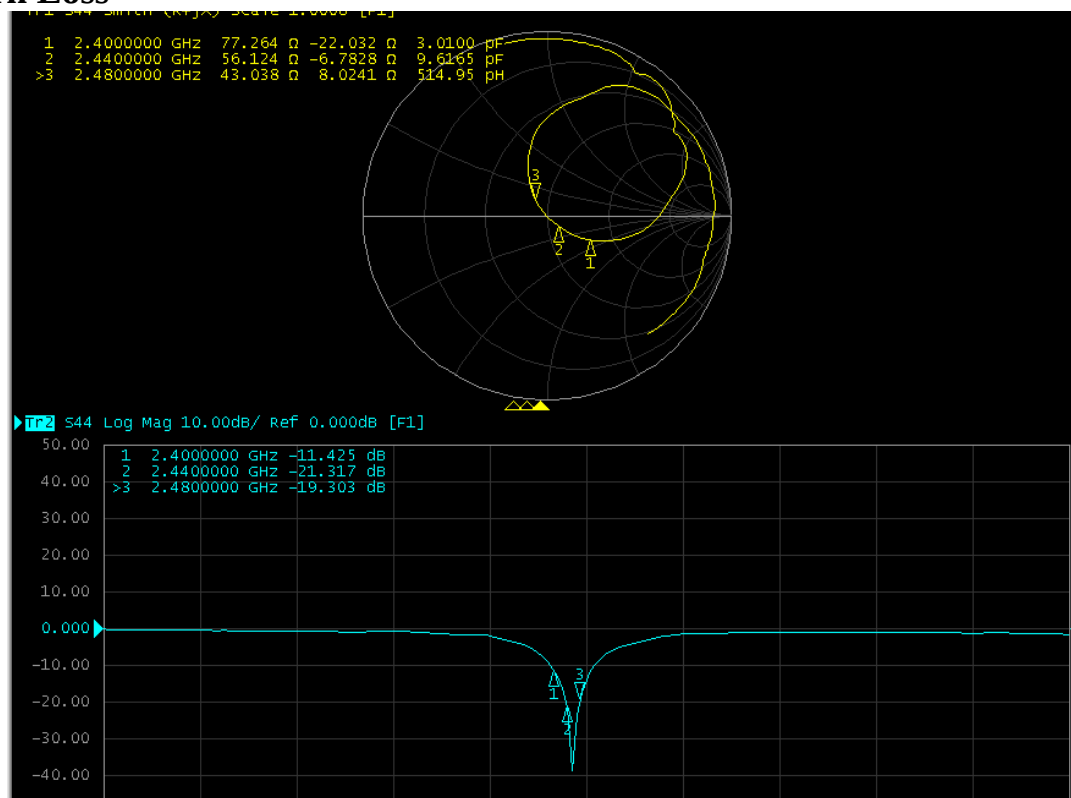


The Environment of Antenna Radiation Pattern

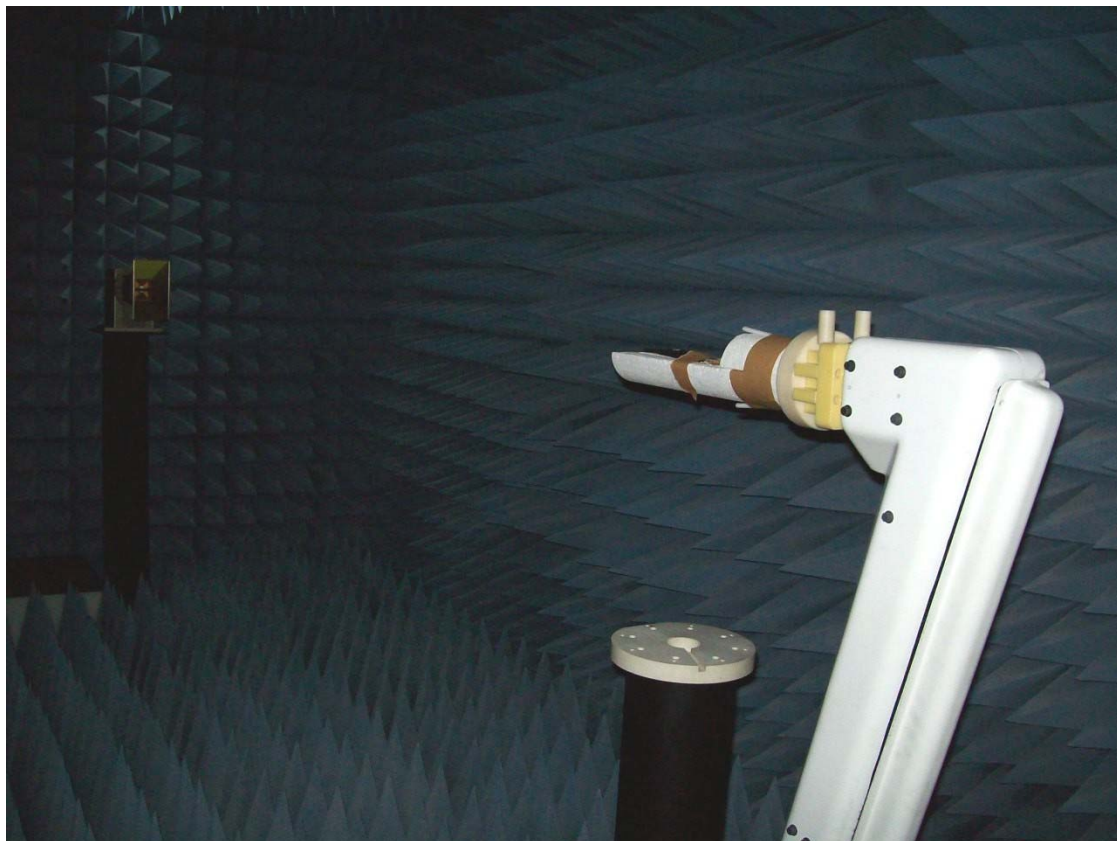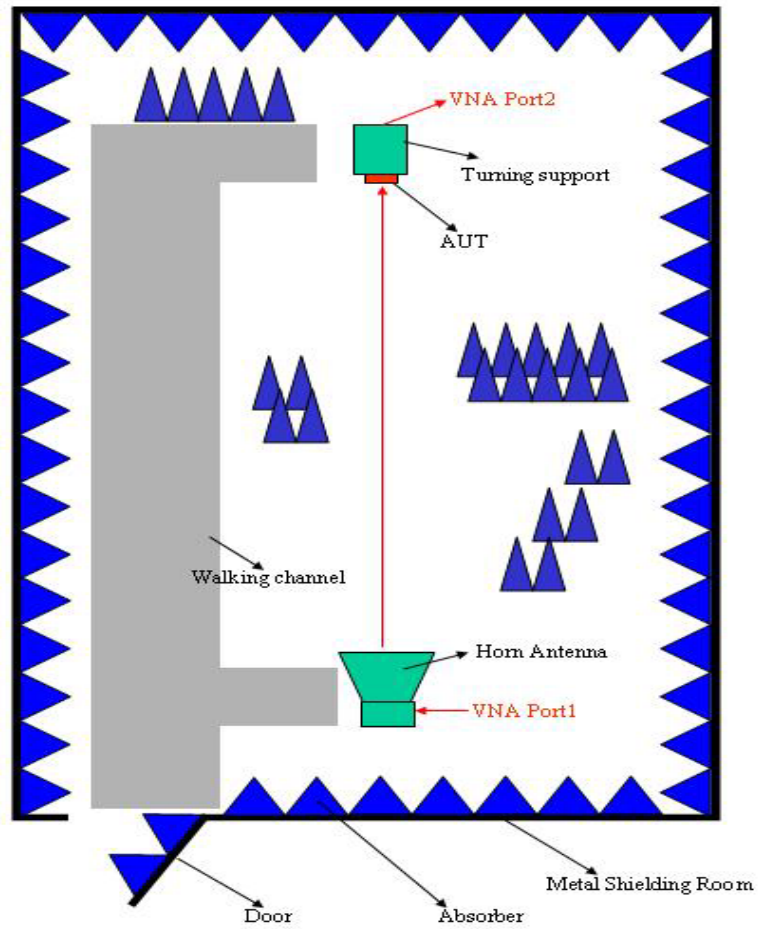


Address: Room 701, Building 3, More Center, No. 87 GuDun Road, Hangzhou, Zhejiang, China

3D radiation pattern diagram

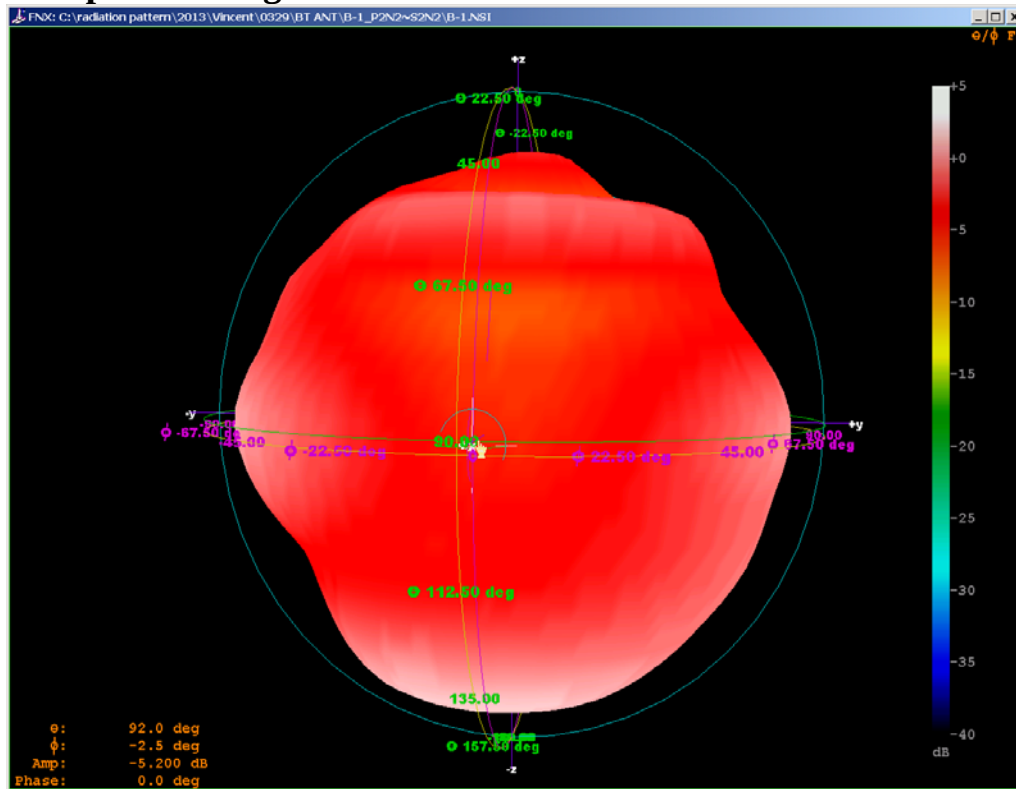


XY-plane

Far-field Power Distribution(H+V) on X-Y Plane

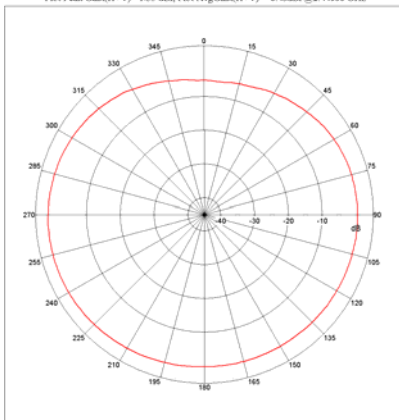

XZ-plane

Far-field Power Distribution(H+V) on X-Z Plane

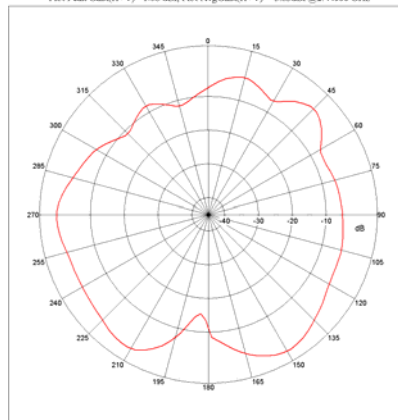

YZ-plane

Far-field Power Distribution(H+V) on Y-Z Plane
Plot Peak Gain(H+V)= 1.11 dBi; Plot AvgGain(H+V)= -2.99dBi @2.44000 GHz

