Power NVNT n20 5200MHz

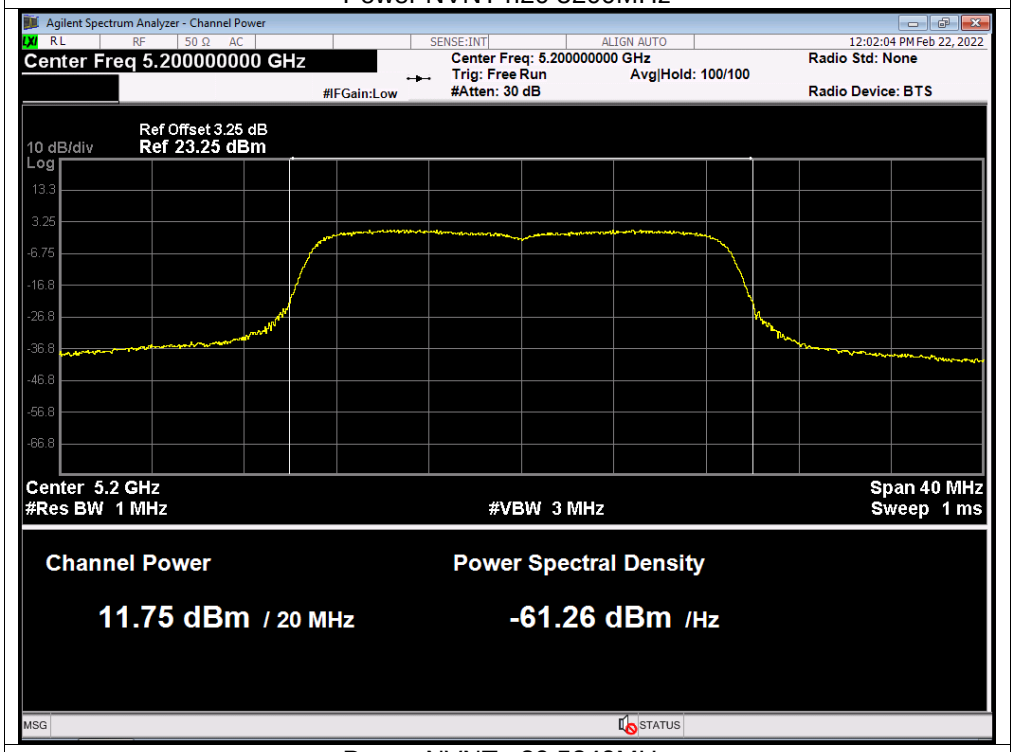

Power NVNT n20 5240MHz

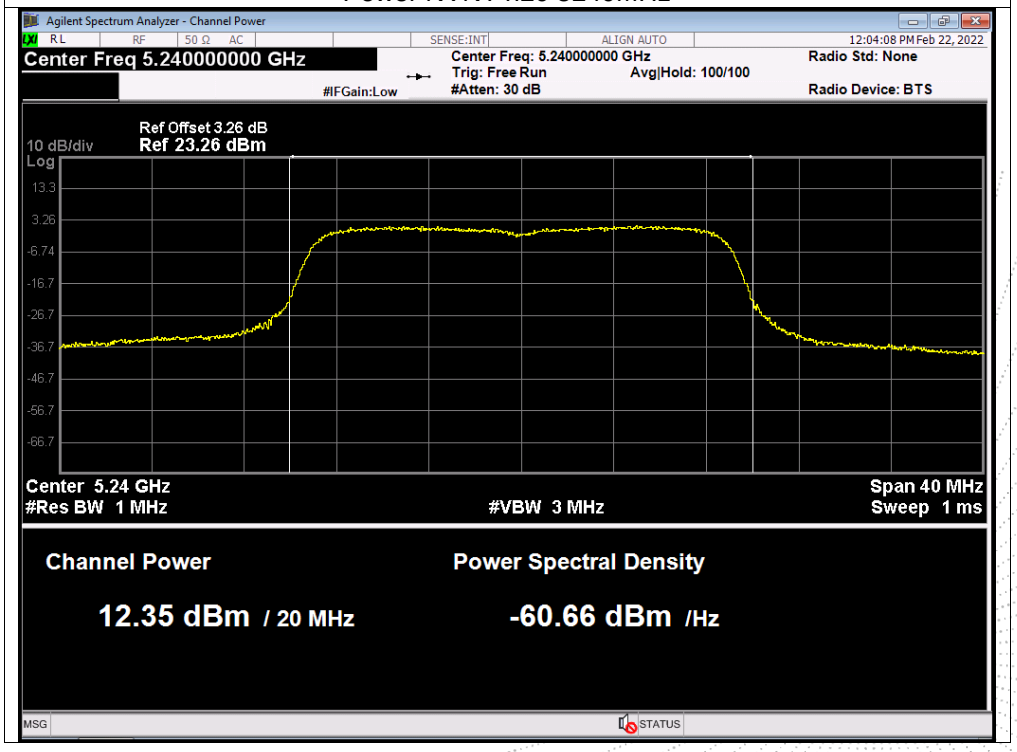

Power NVNT n40 5190MHz

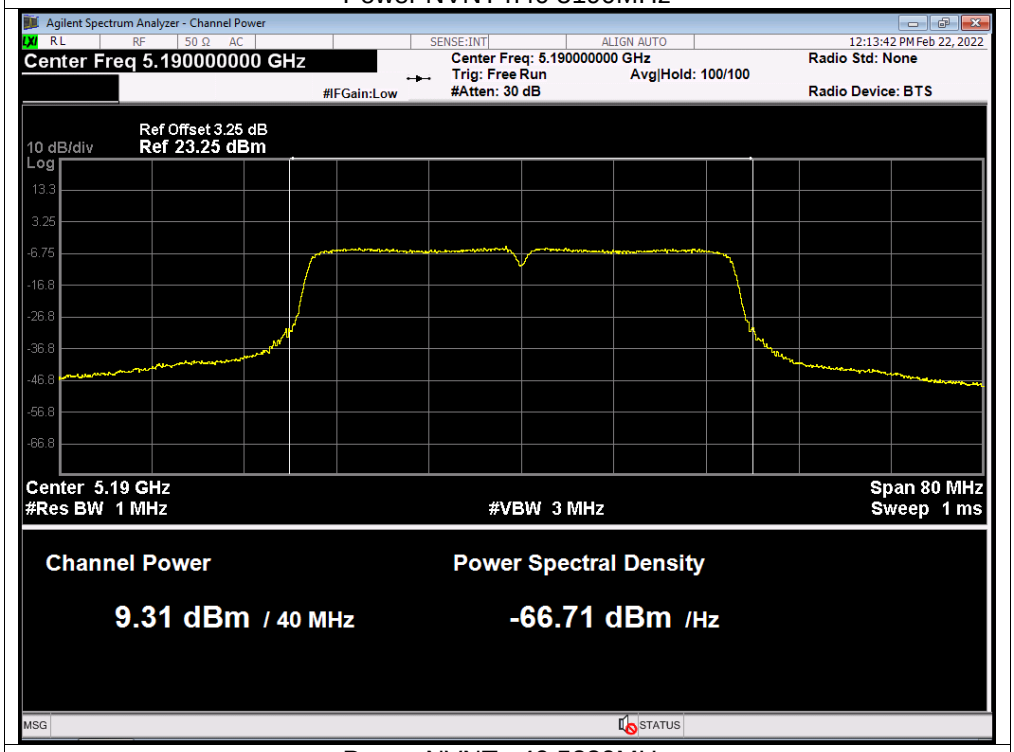

Power NVNT n40 5230MHz

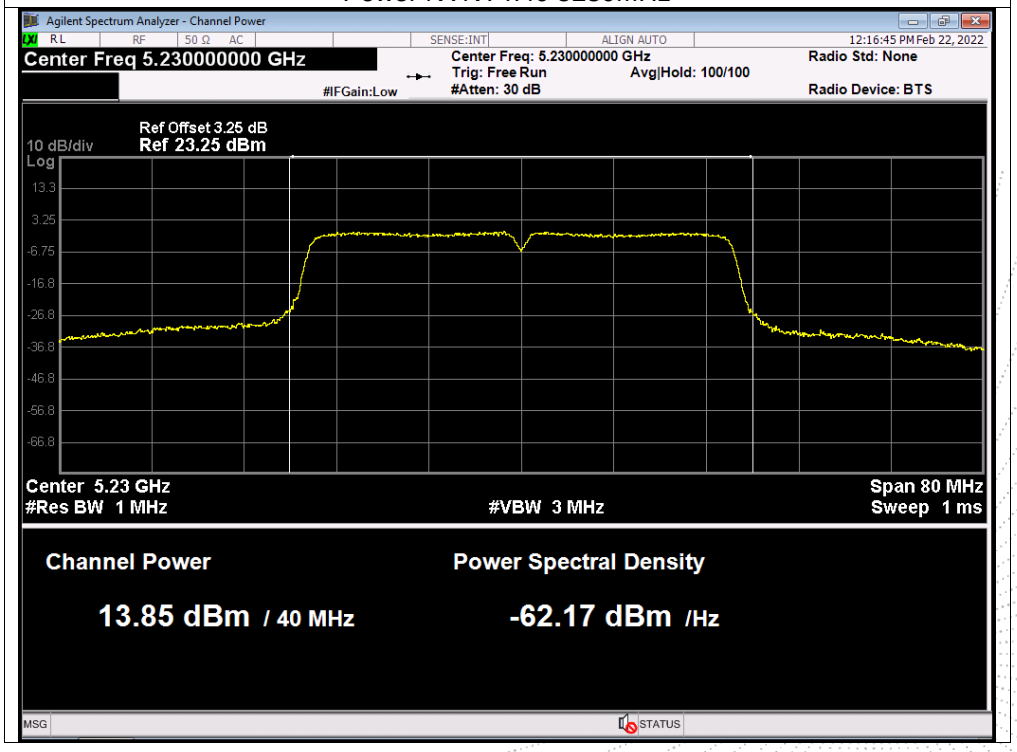

Power NVNT ac20 5180MHz

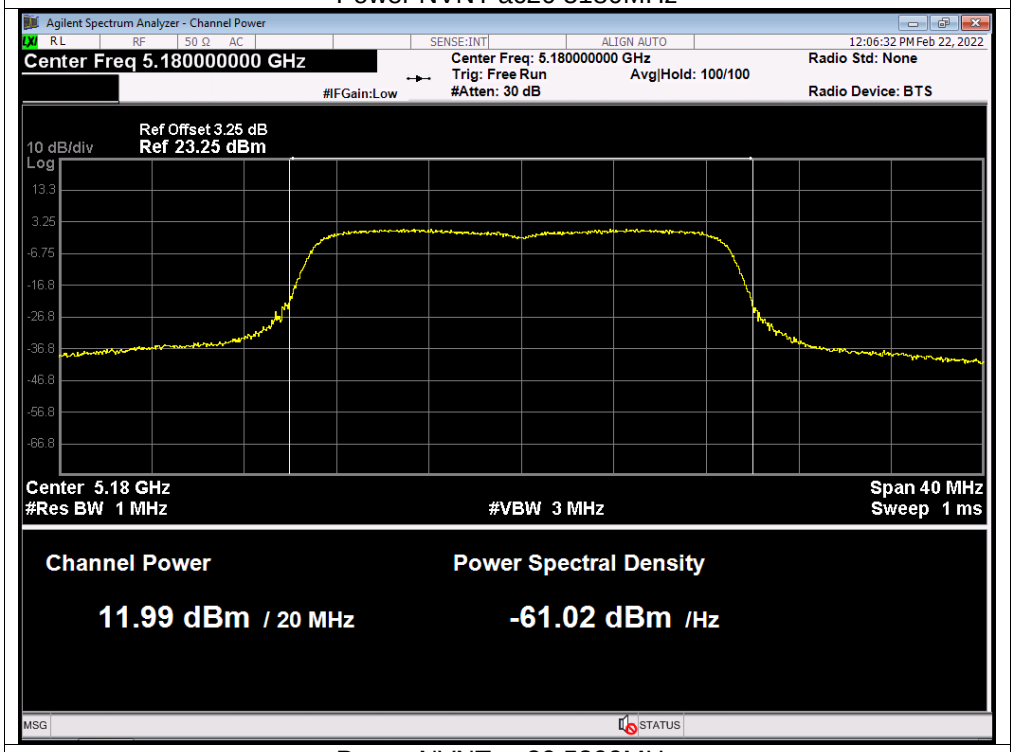

Power NVNT ac20 5200MHz

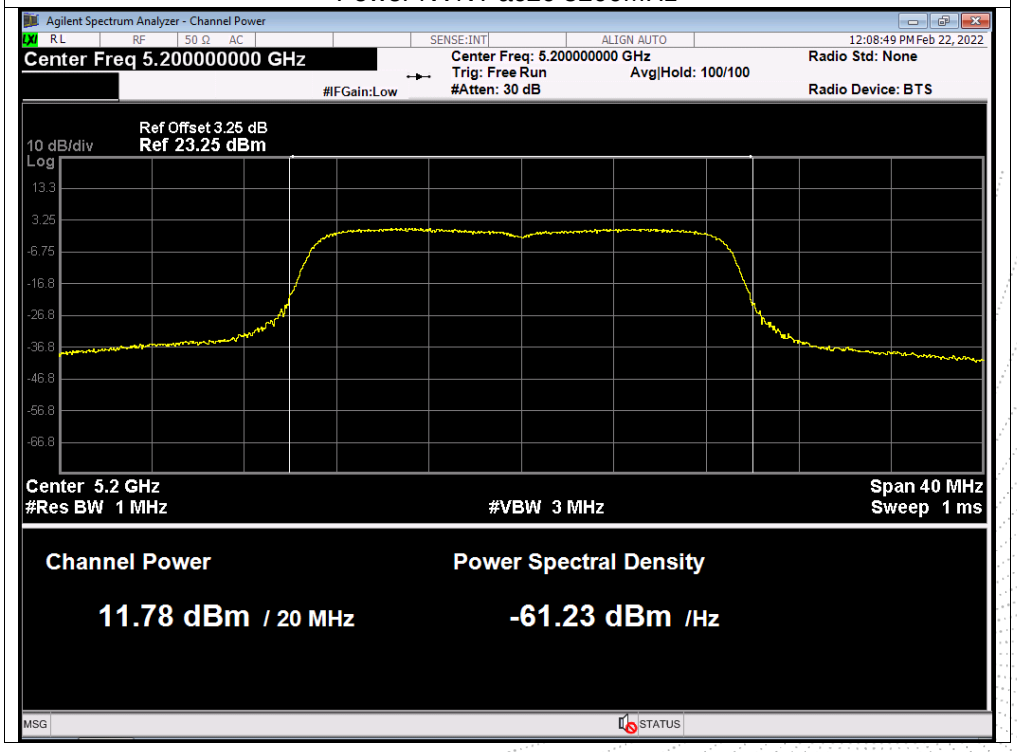

Power NVNT ac20 5240MHz

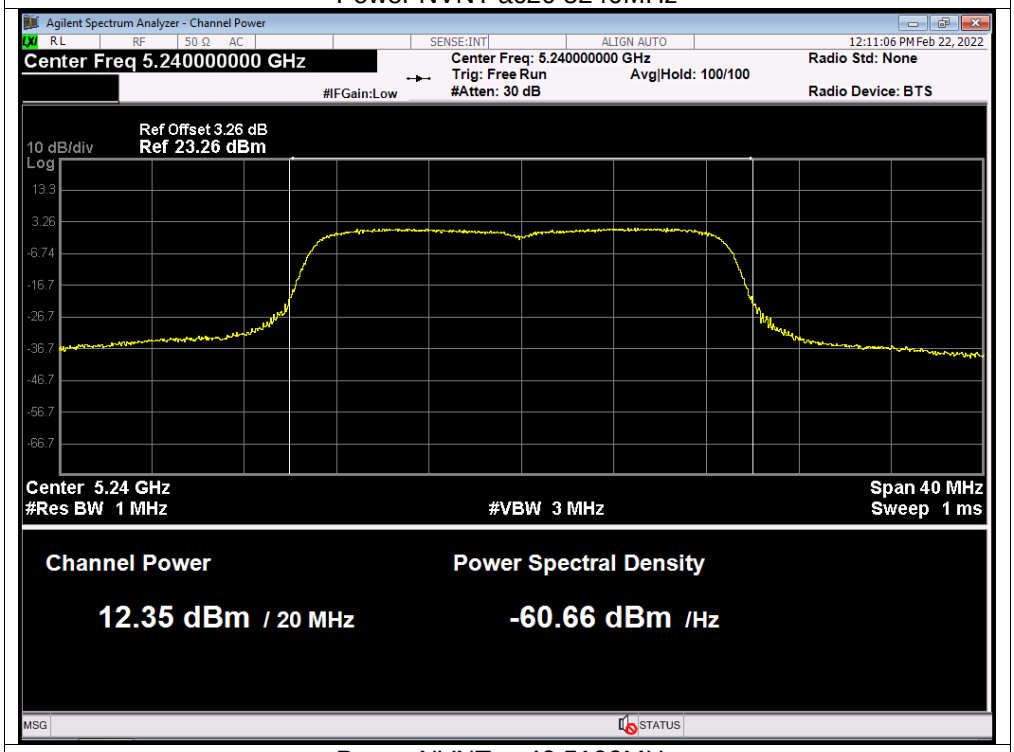

Power NVNT ac40 5190MHz

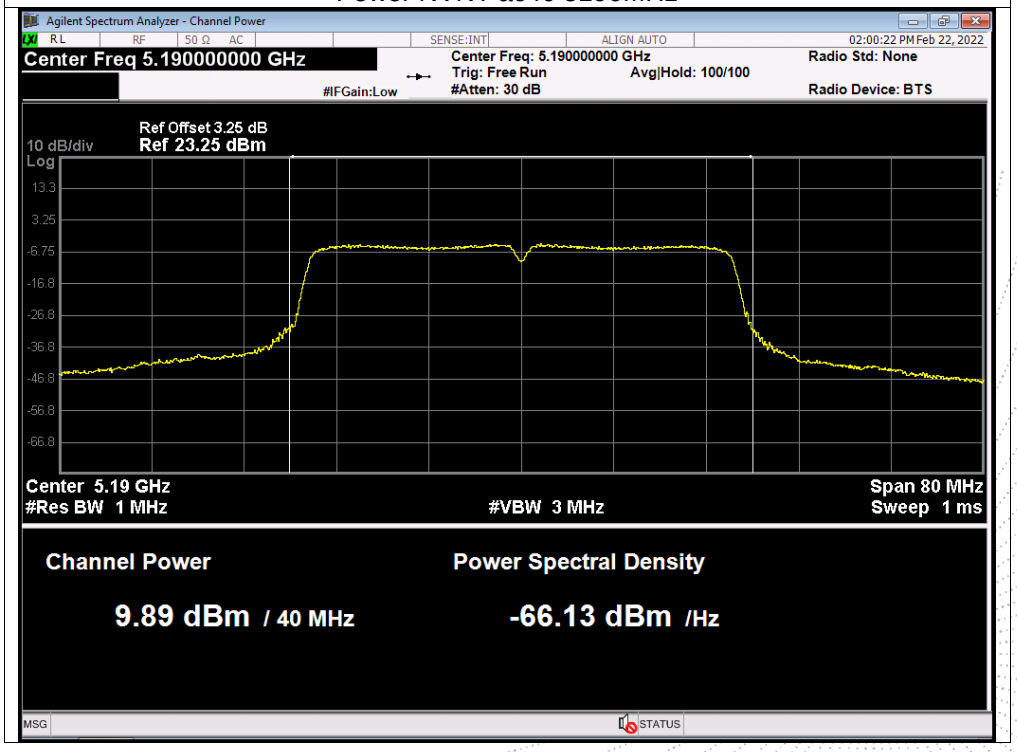

Power NVNT ac40 5230MHz

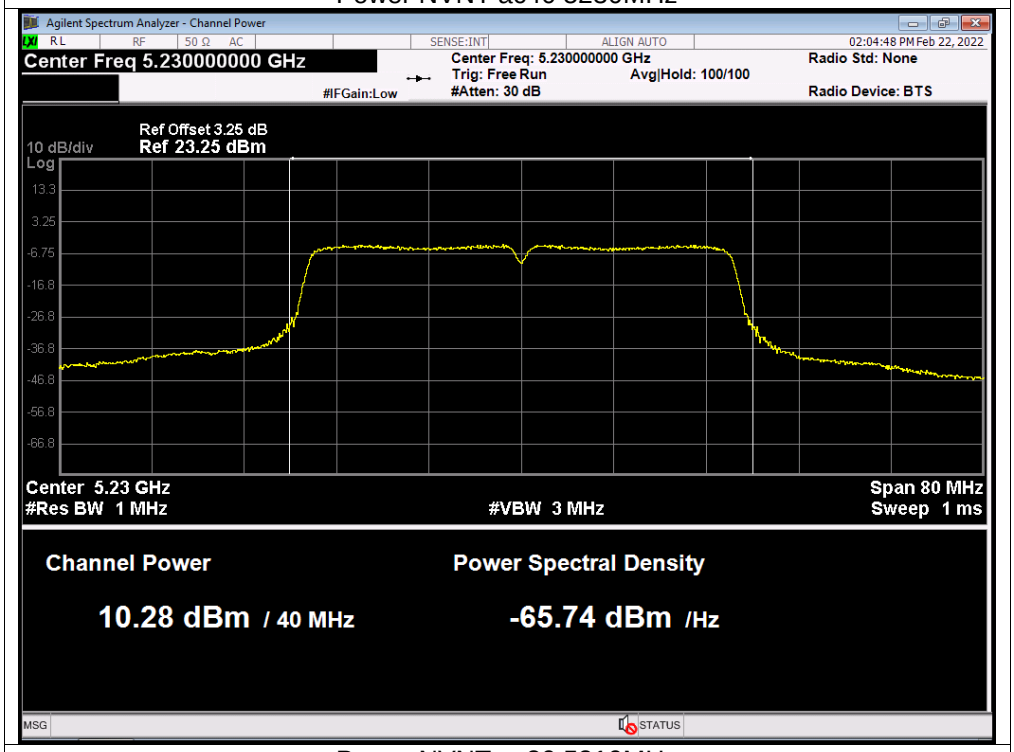

Power NVNT ac80 5210MHz

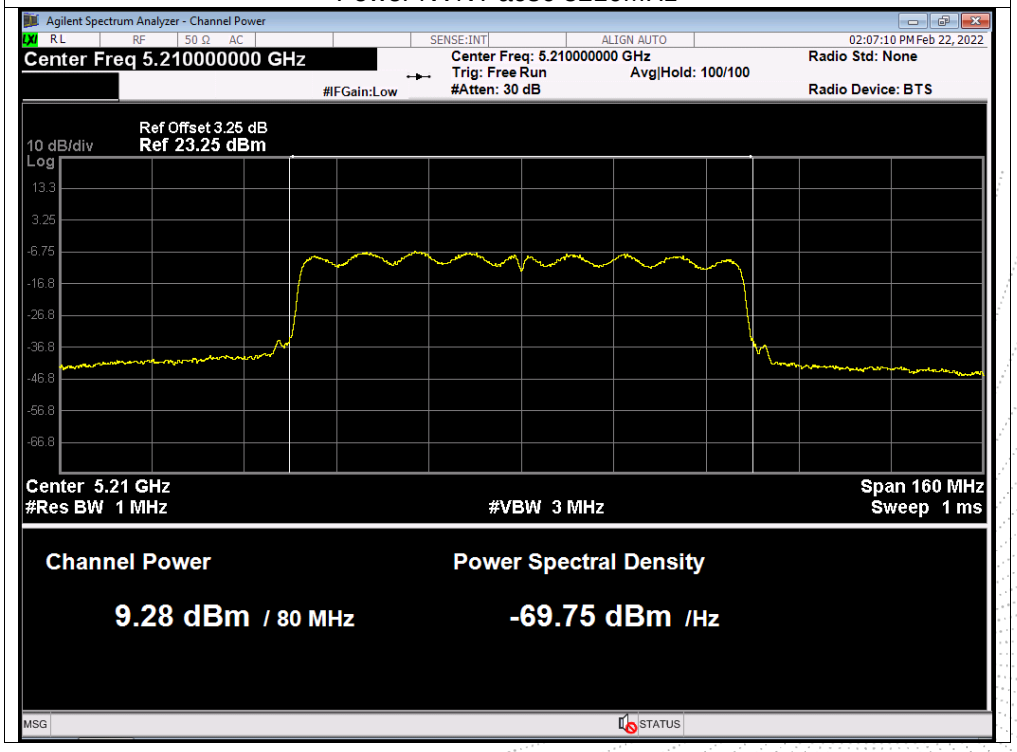

11. Out Of Band Emissions

11.1 Block Diagram Of Test Setup

11.2 Limit

According to FCC §15.407(b)
Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:
(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.
(2) All emissions shall be limited to a level of −27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

11.3 Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data

11.5 Test Result

Test Graphs

Band Edge NVNT a 5180MHz Low

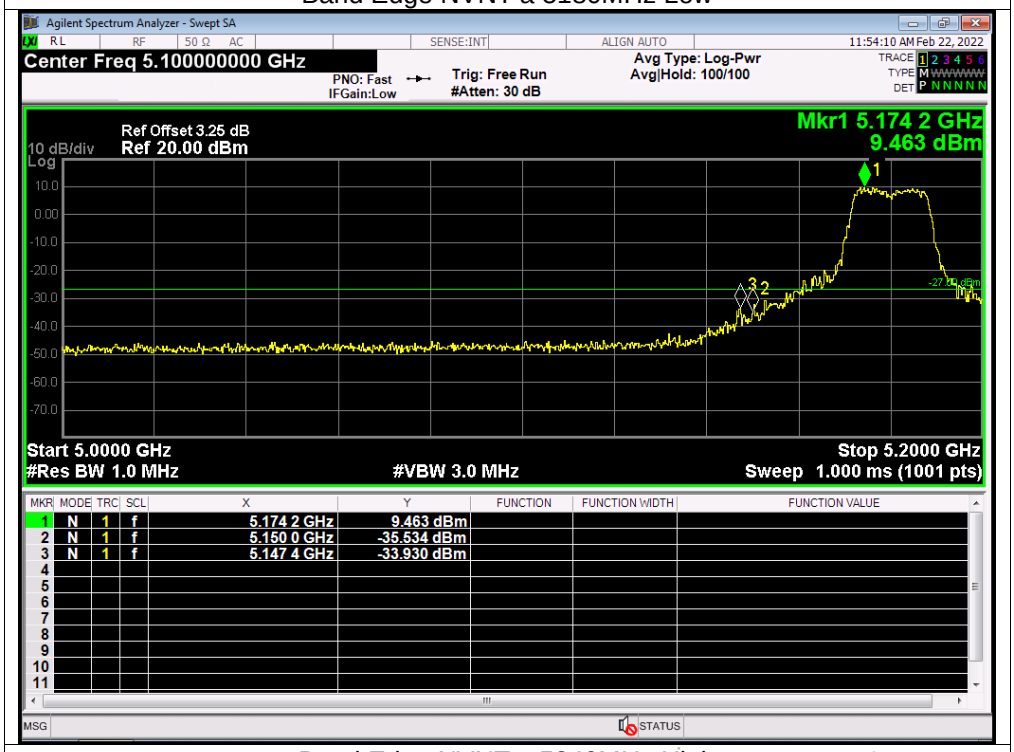

Band Edge NVNT a 5240MHz High

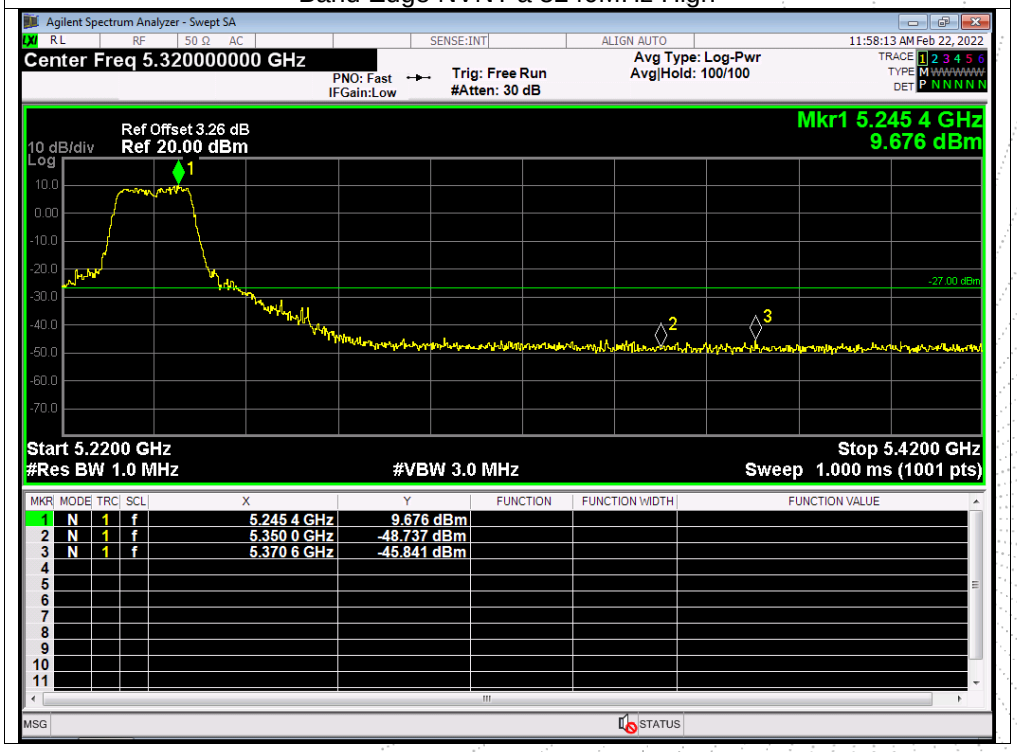

Band Edge NVNT n20 5180MHz Low

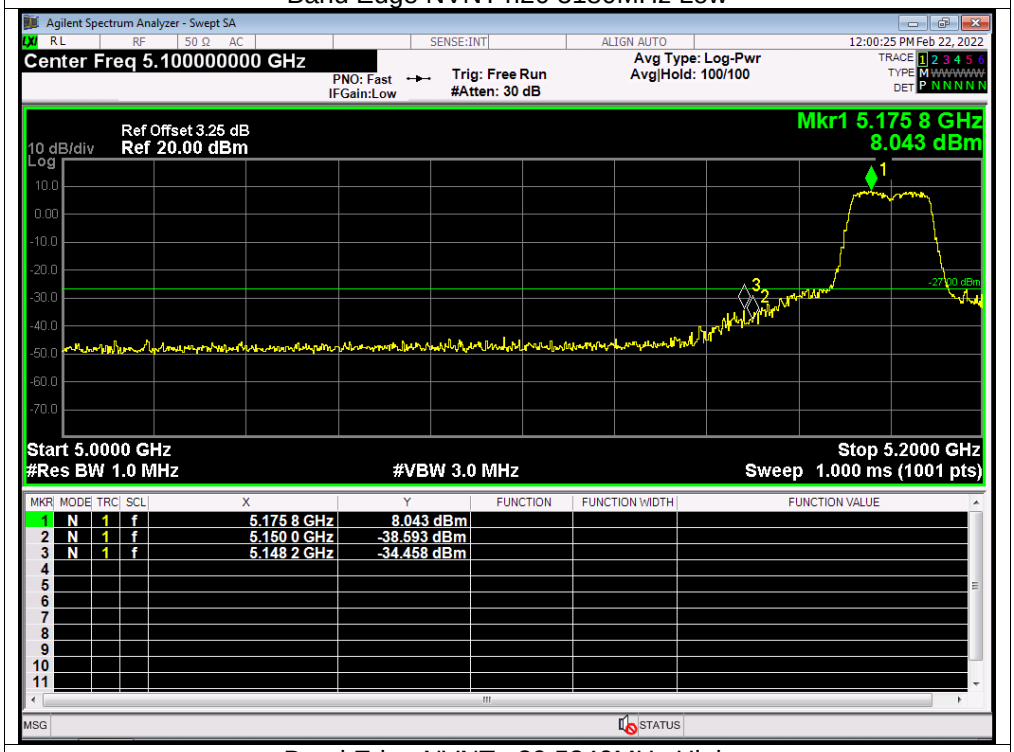

Band Edge NVNT n20 5240MHz High

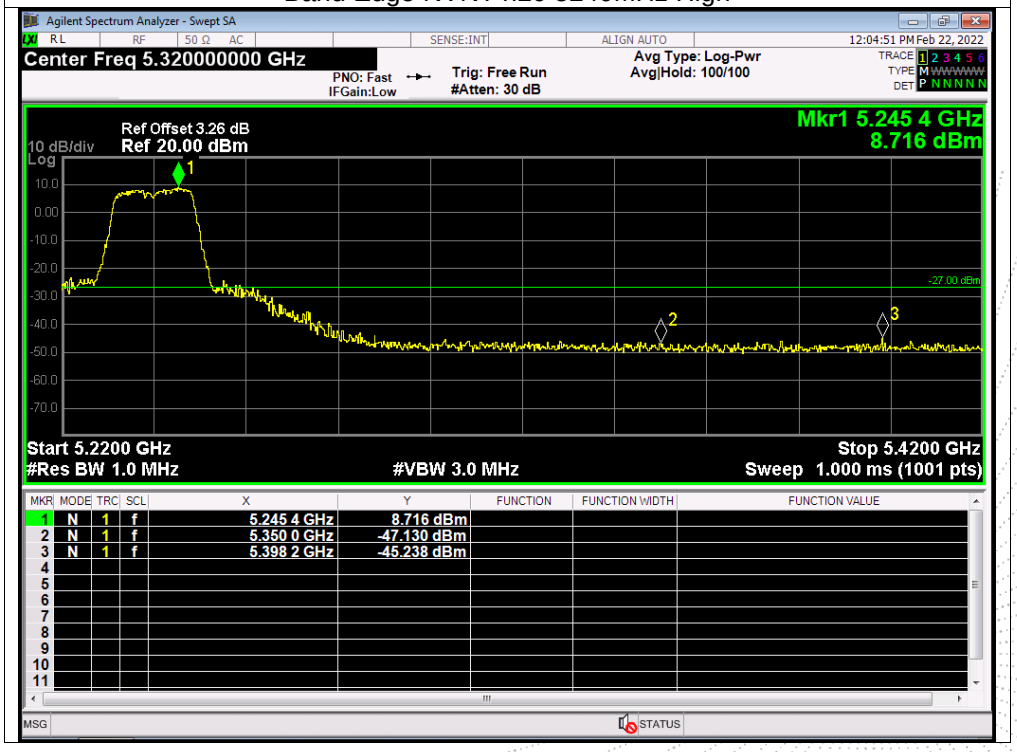

Band Edge NVNT n40 5190MHz Low

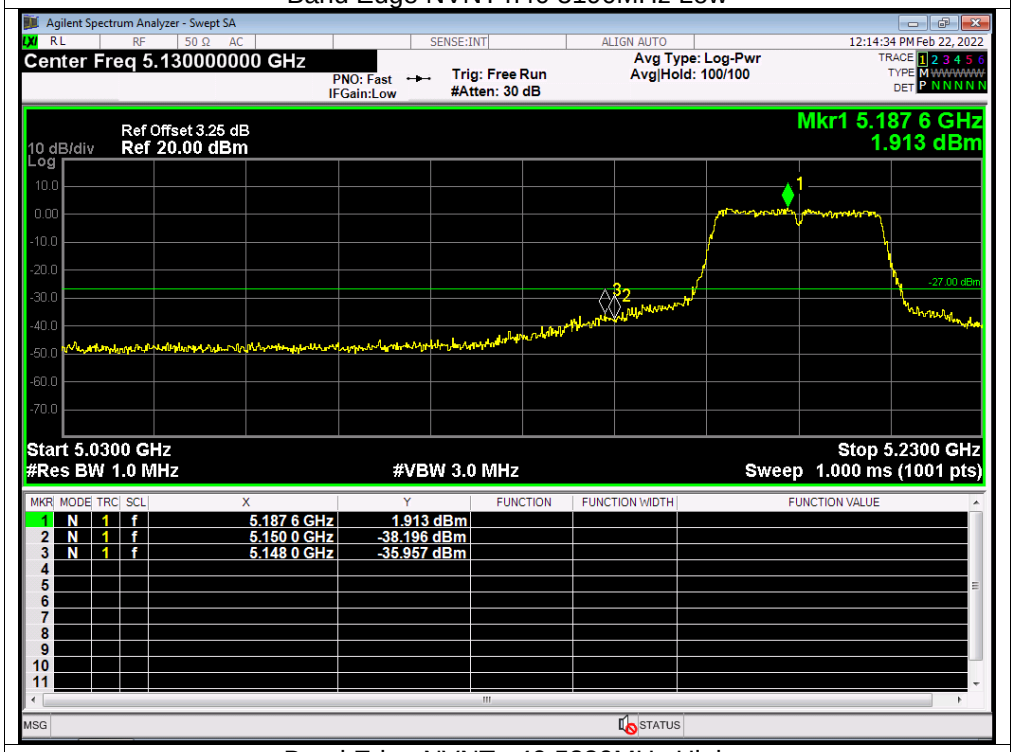

Band Edge NVNT n40 5230MHz High

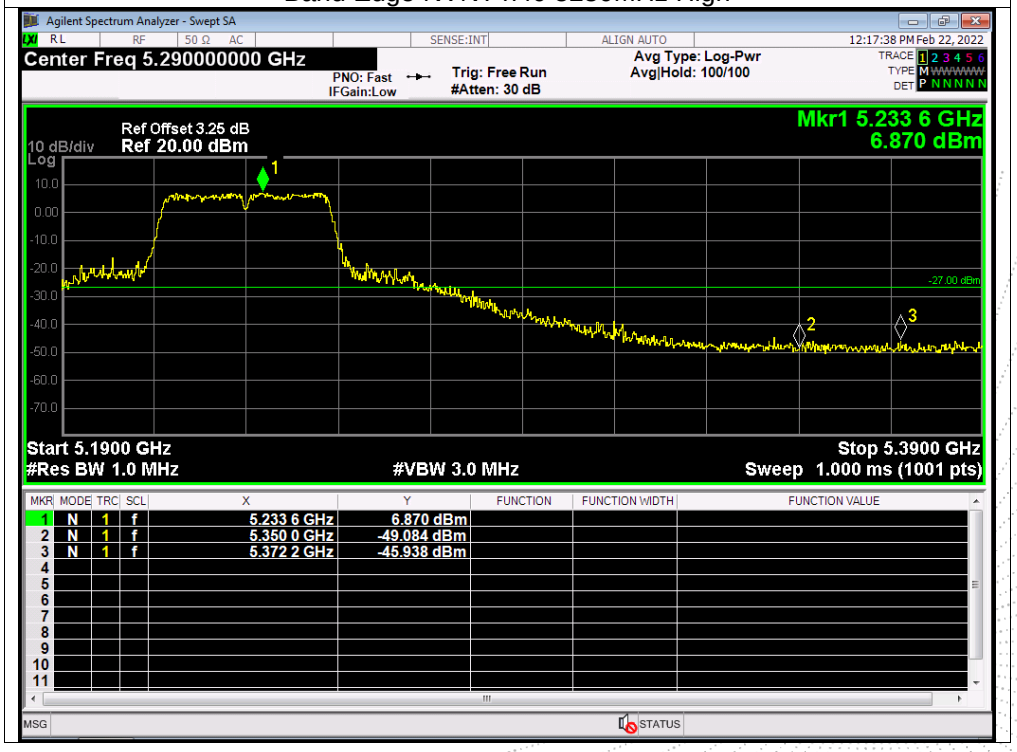

Band Edge NVNT ac20 5180MHz Low

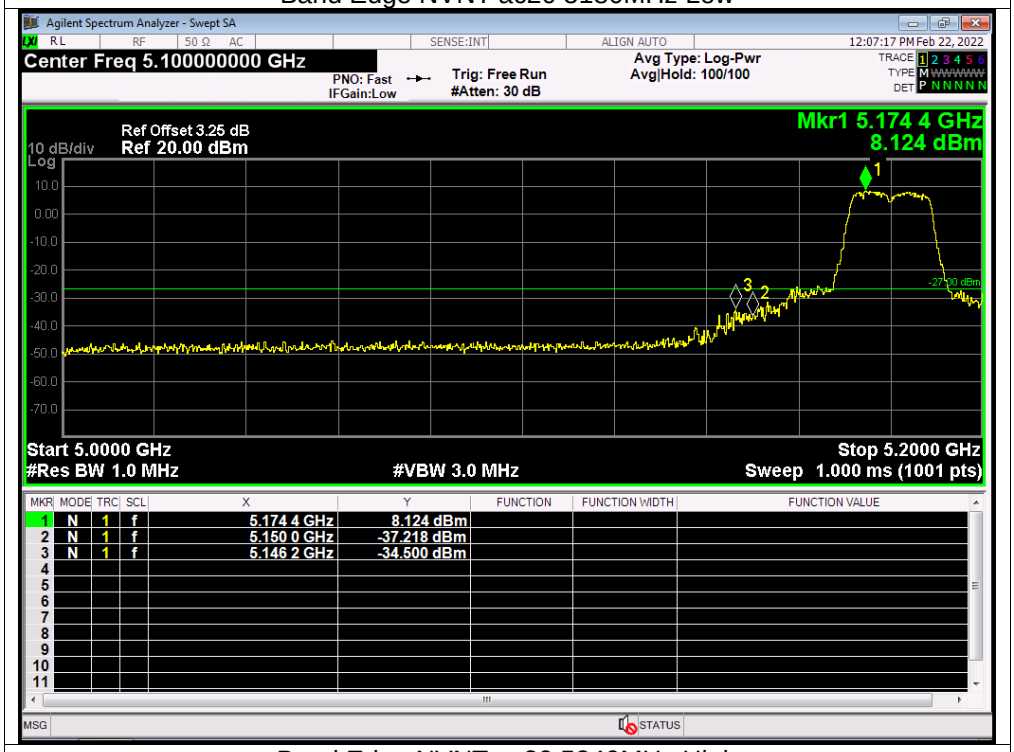

Band Edge NVNT ac20 5240MHz High

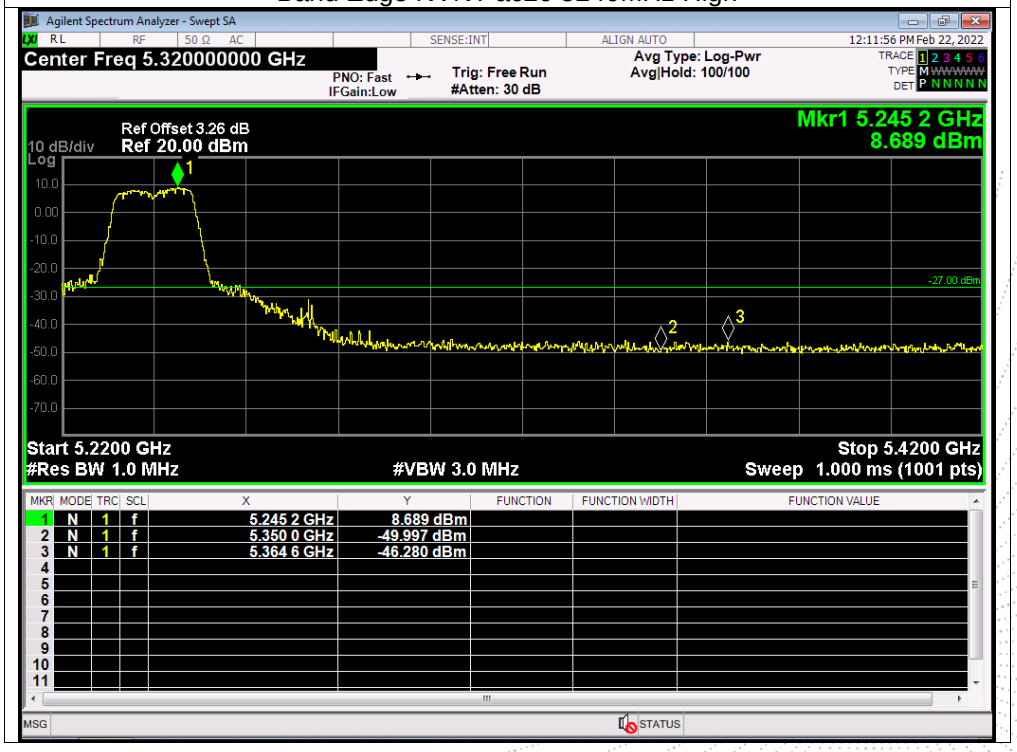

Band Edge NVNT ac40 5190MHz Low

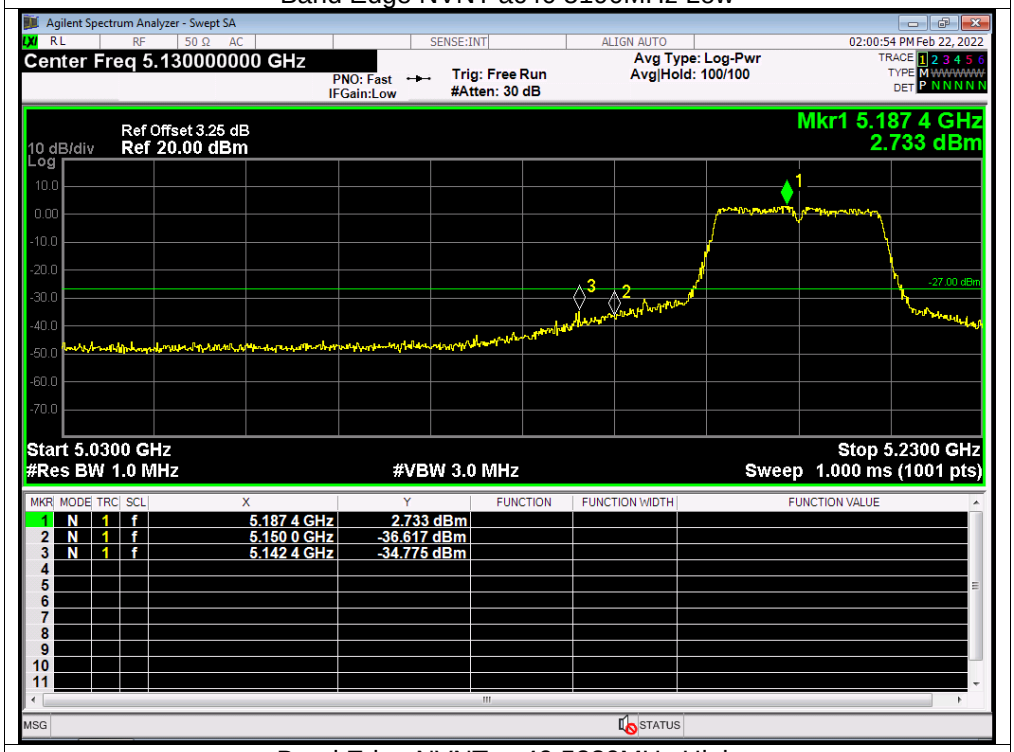

Band Edge NVNT ac40 5230MHz High

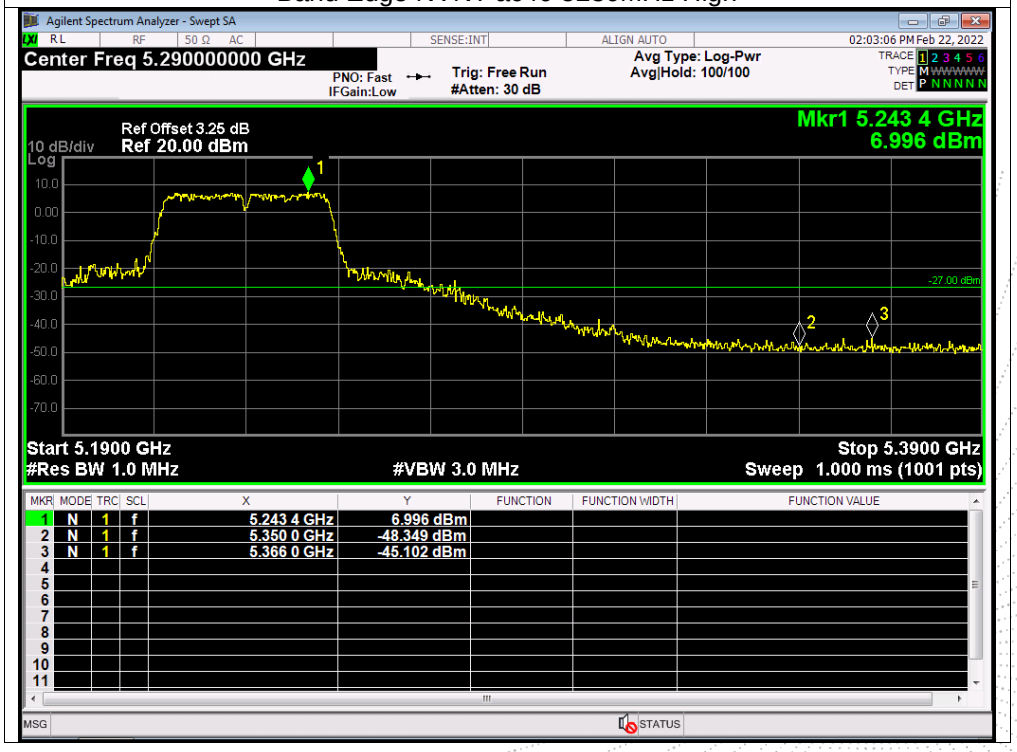

Band Edge NVNT ac80 5210MHz High

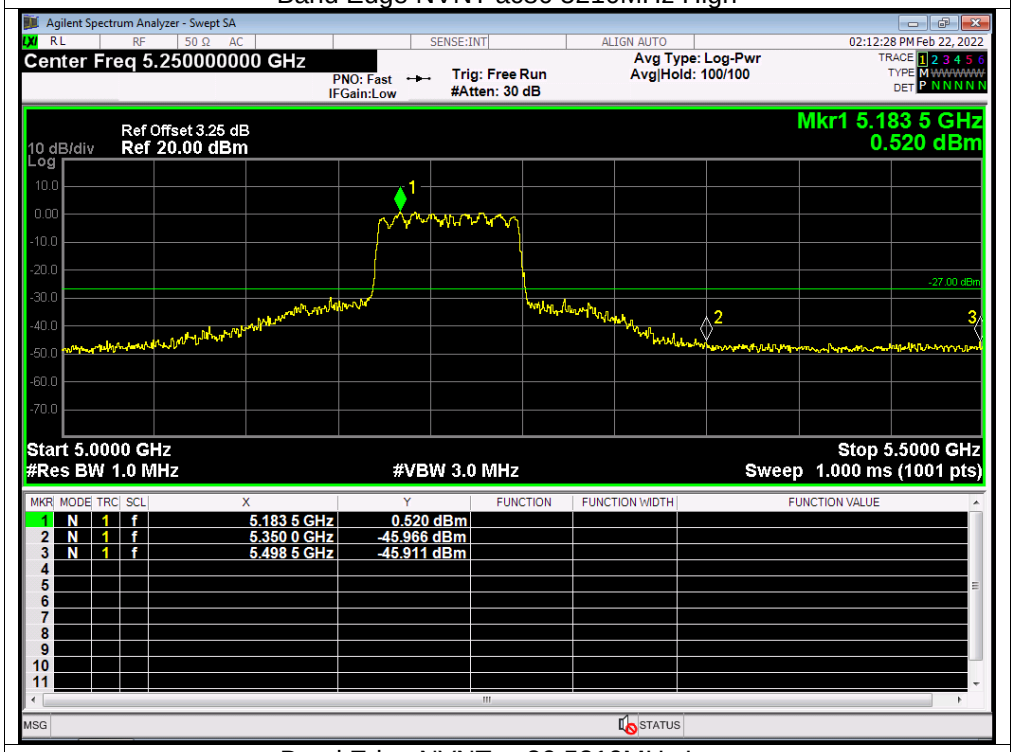

Band Edge NVNT ac80 5210MHz Low

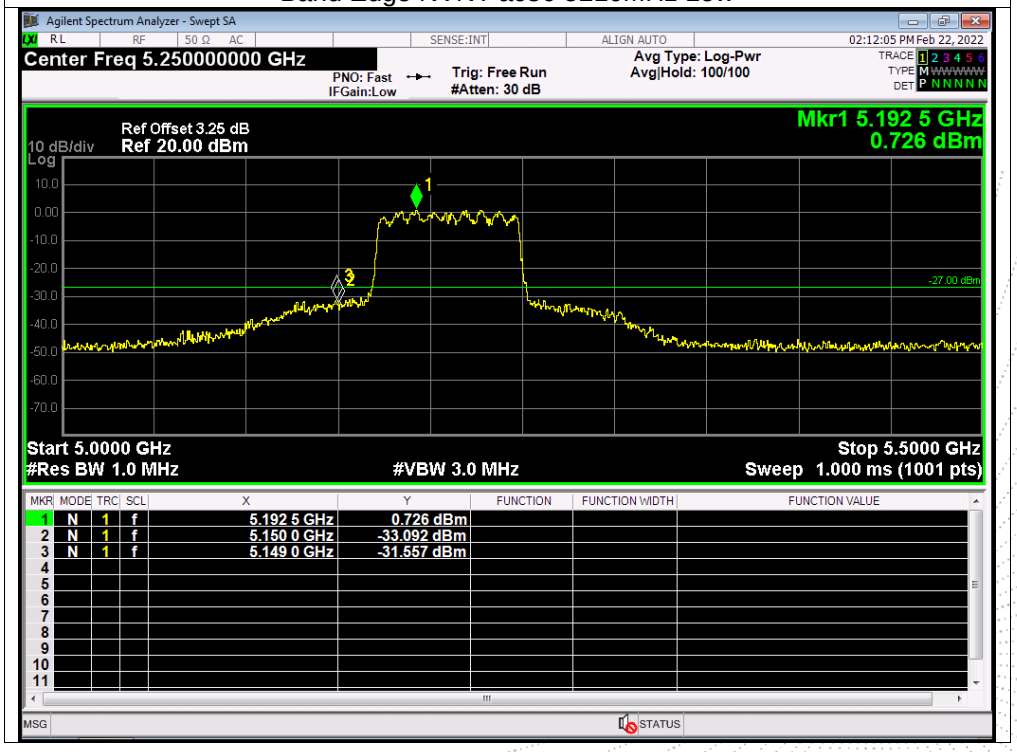

12. Spurious RF Conducted Emissions

12.1 Block Diagram Of Test Setup

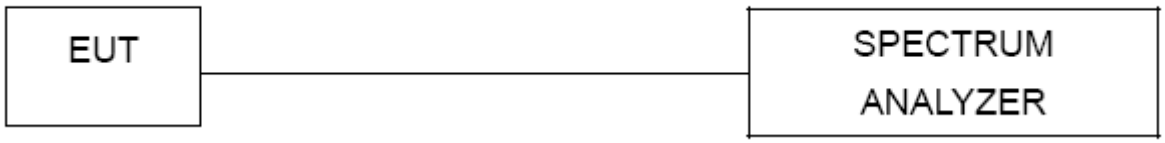

12.2 Limit

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:
(1)For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.
(2)For transmitters operating in the 5.725-5.85 GHz band(i) All emissions shall be limited to a level of −27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

12.3 Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

12.4 Test Result

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.

About:26.5GHz-40GHz, The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Test Graphs

Tx. Spurious NVNT a 5180MHz Emission

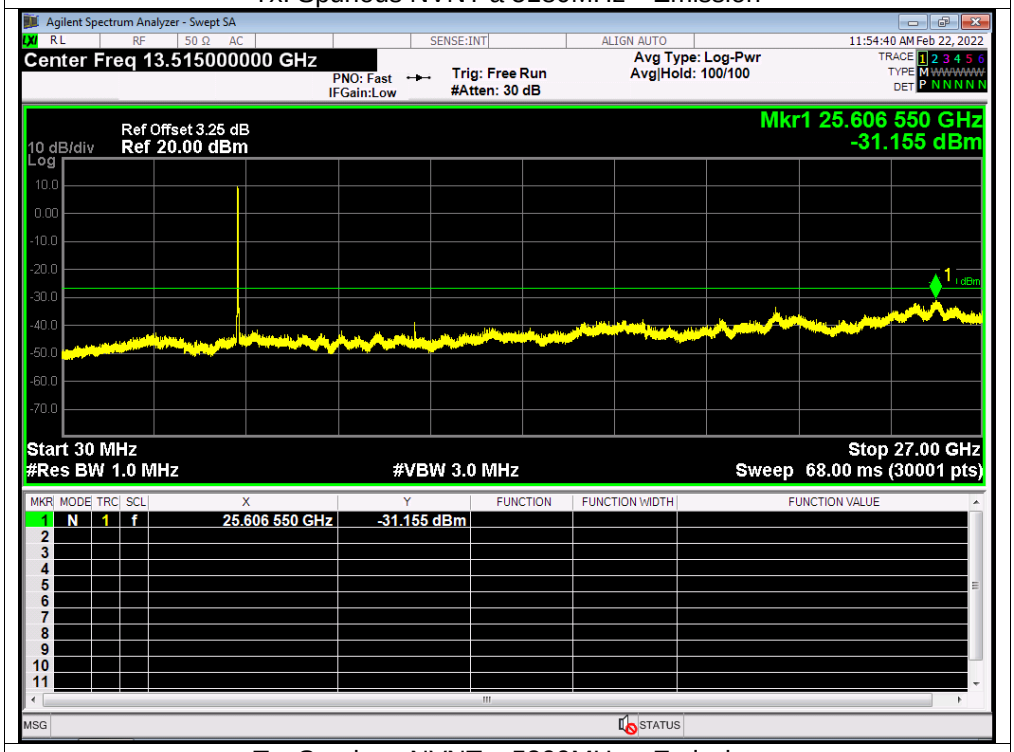

Tx. Spurious NVNT a 5200MHz Emission

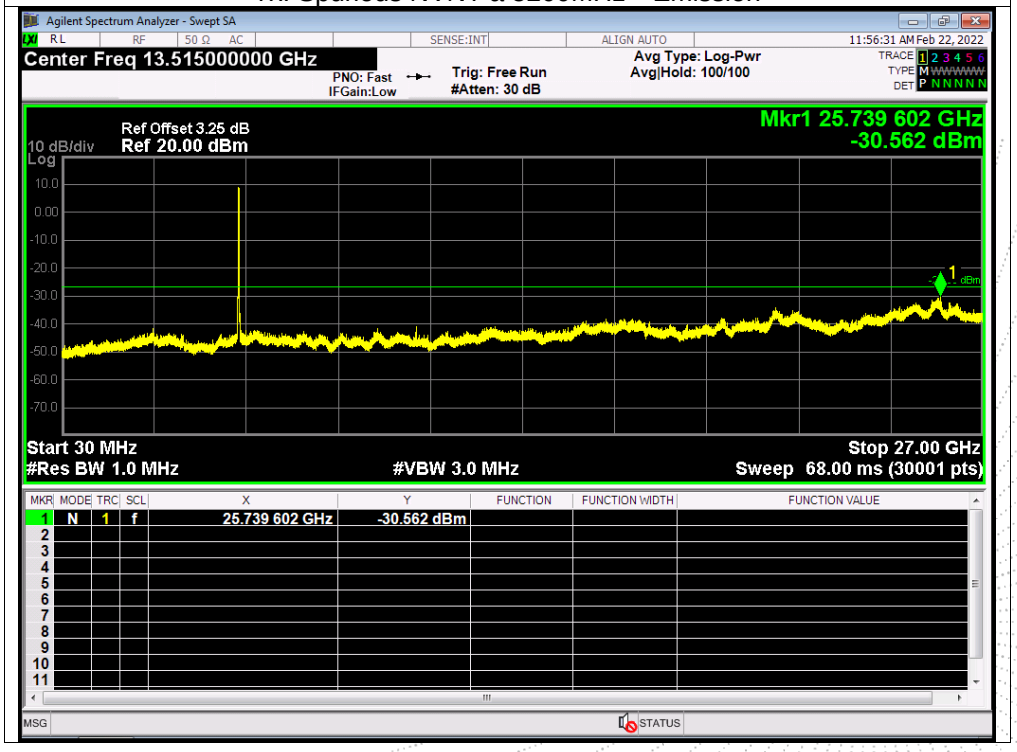

Tx. Spurious NVNT a 5240MHz Emission

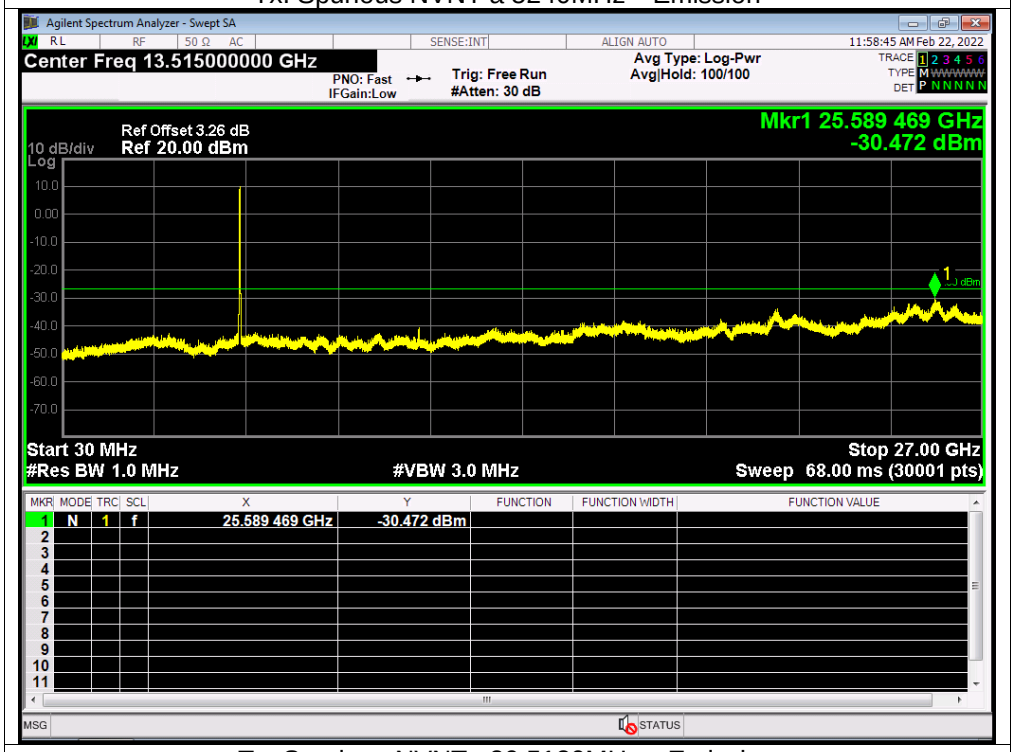

Tx. Spurious NVNT n20 5180MHz Emission

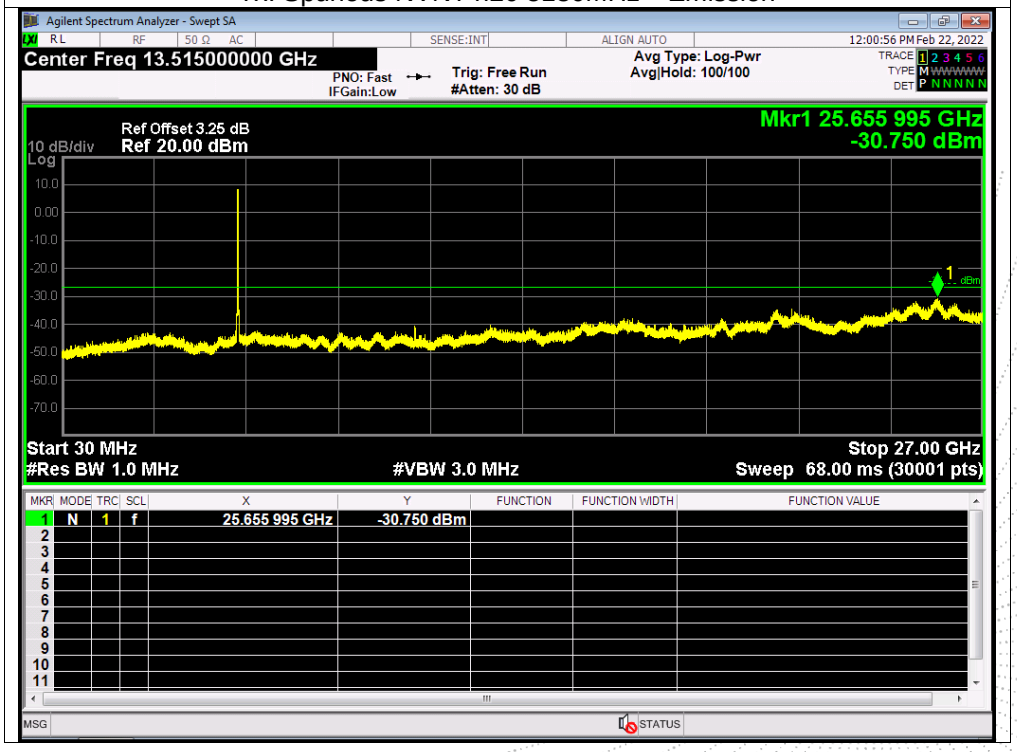

Tx. Spurious NVNT n20 5200MHz Emission

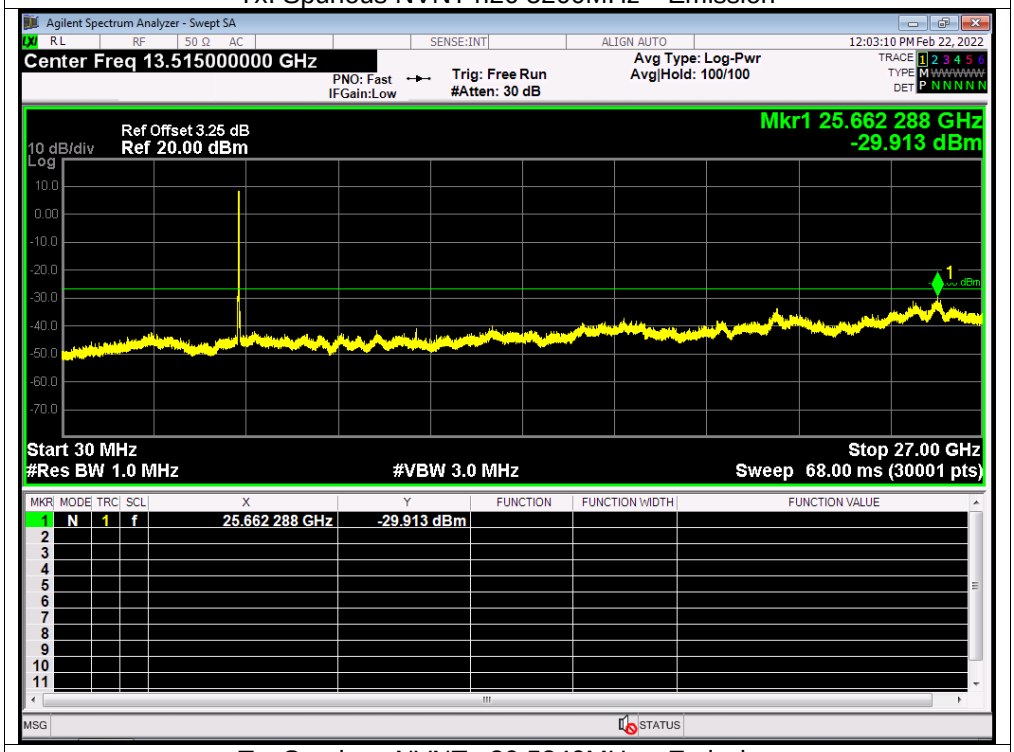

Tx. Spurious NVNT n20 5240MHz Emission

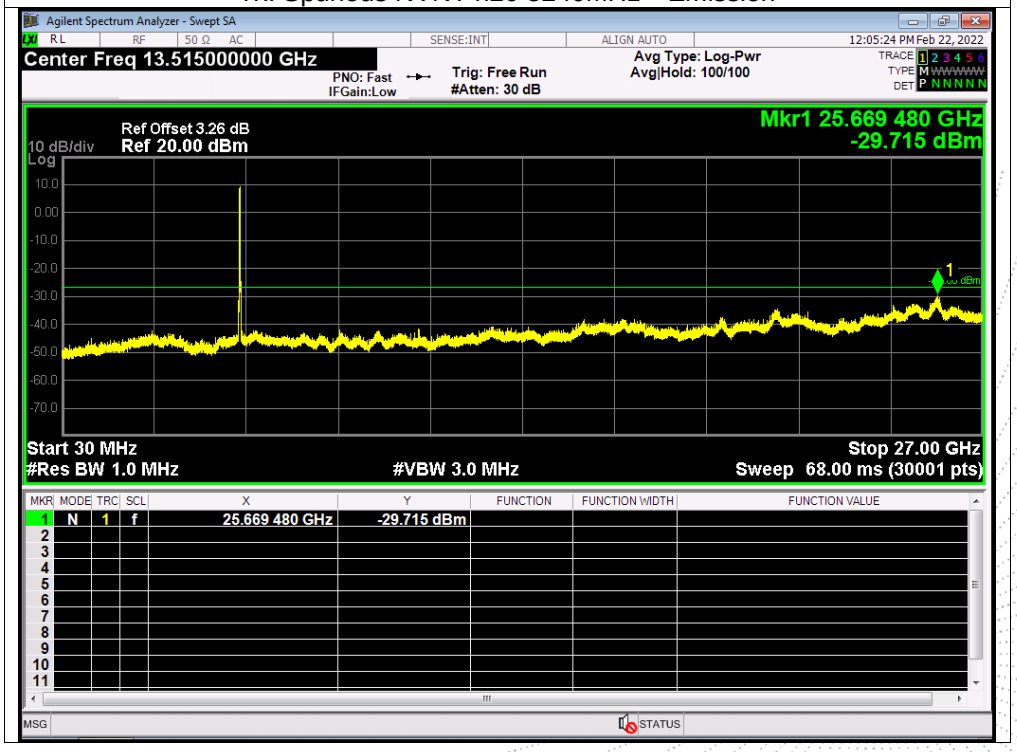

Tx. Spurious NVNT n40 5190MHz Emission

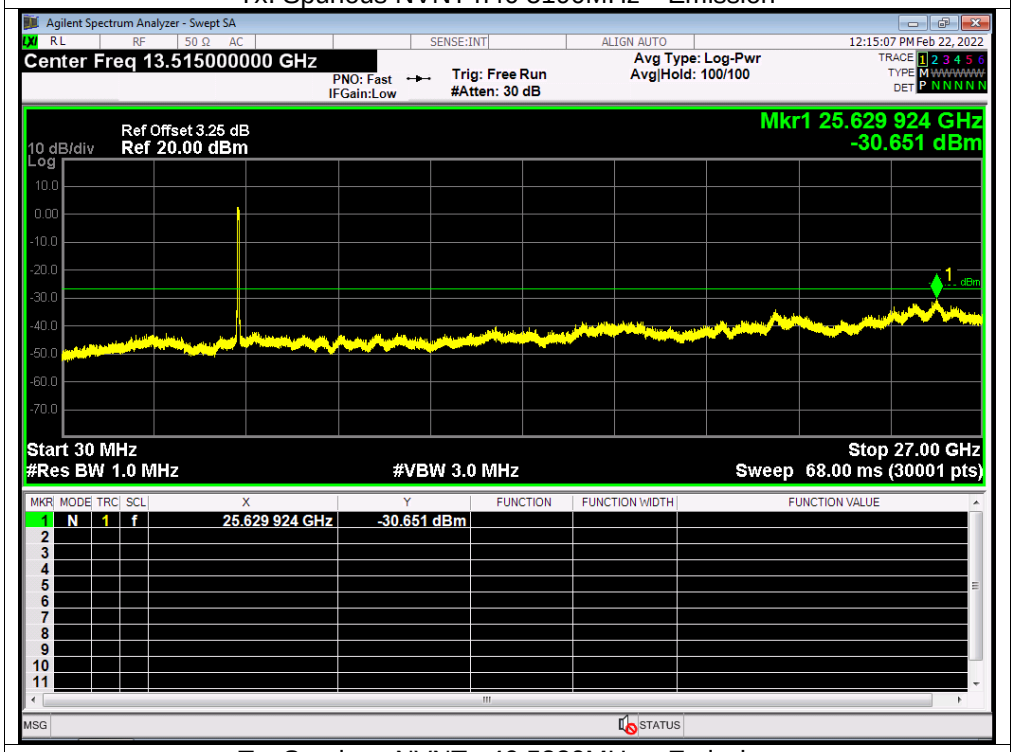

Tx. Spurious NVNT n40 5230MHz Emission

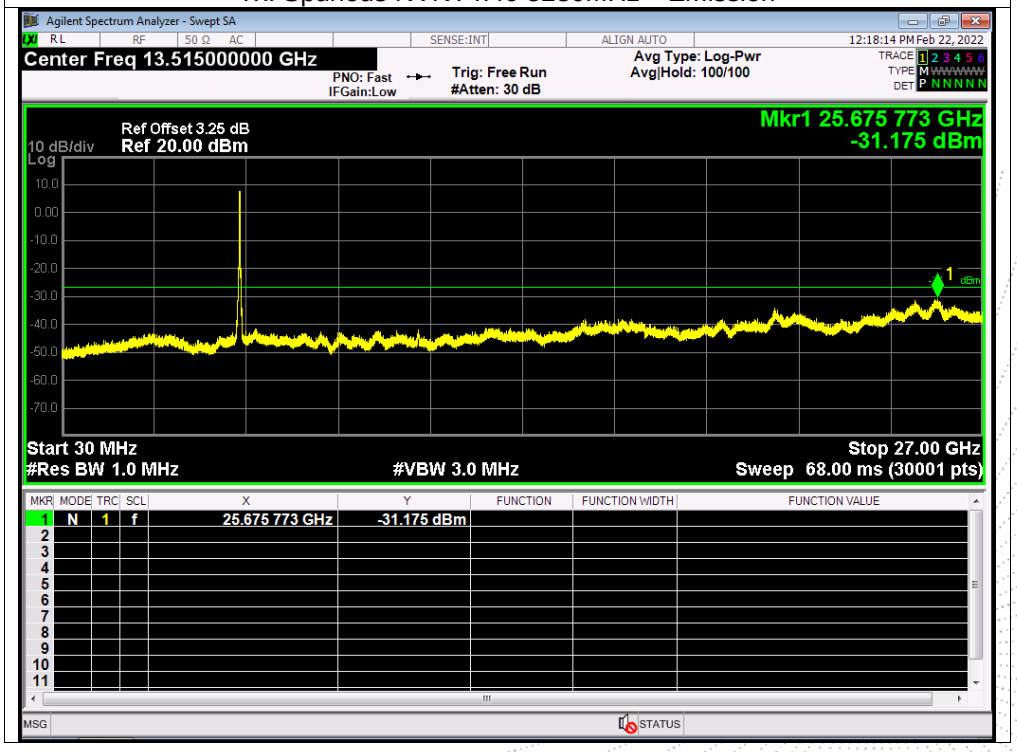

Tx. Spurious NVNT ac20 5180MHz Emission

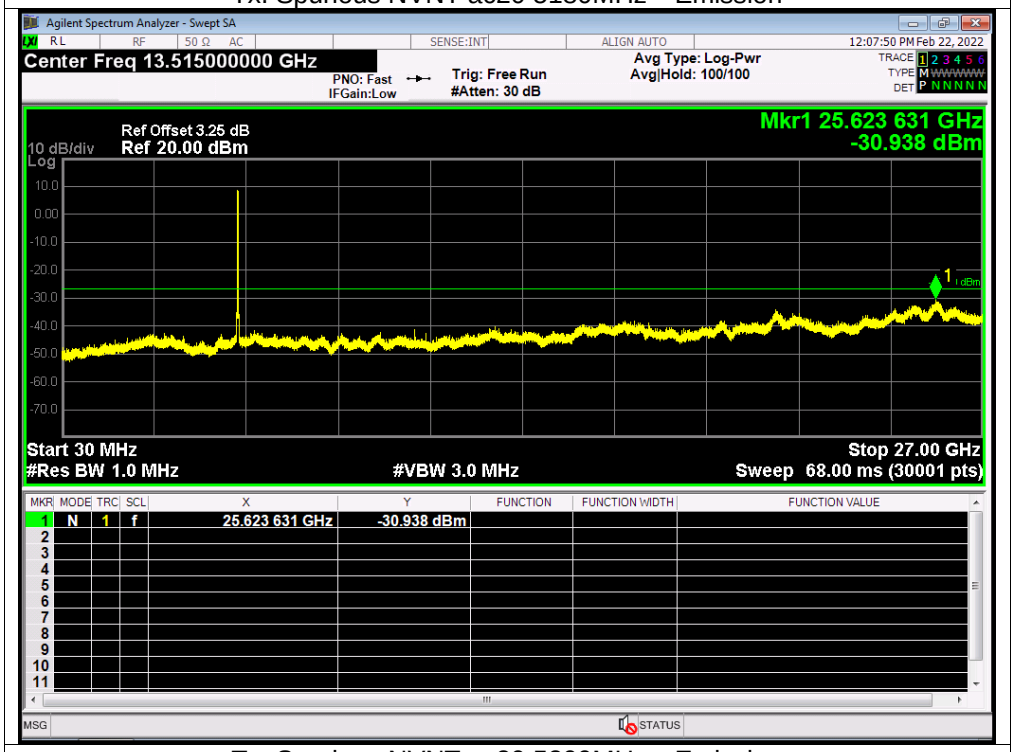

Tx. Spurious NVNT ac20 5200MHz Emission

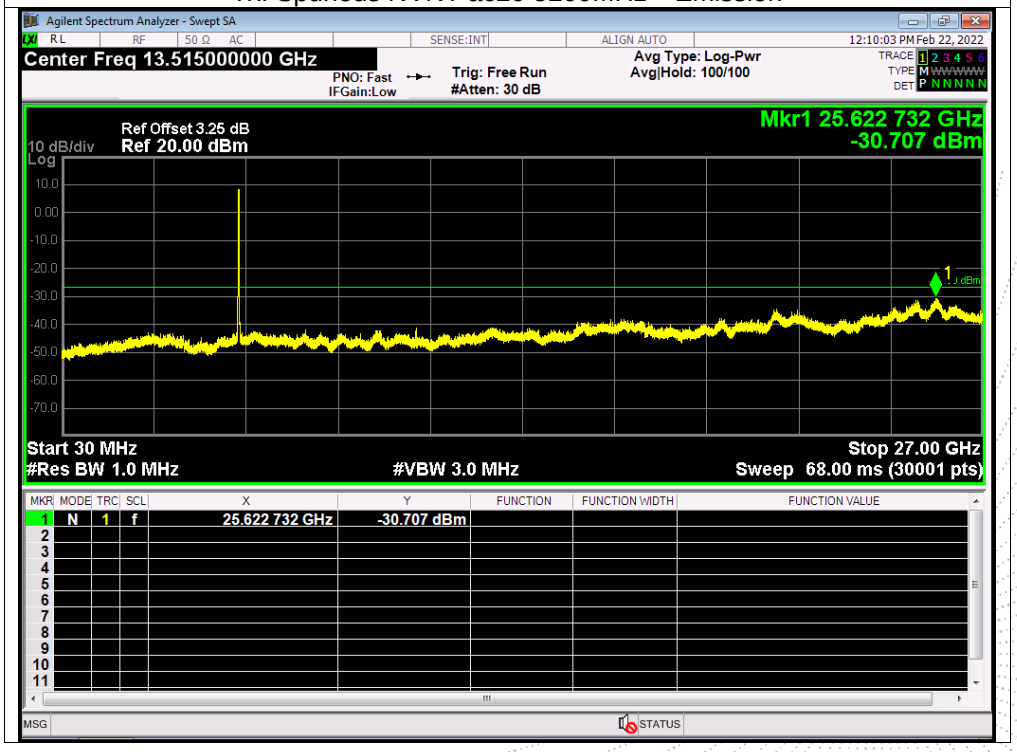

Tx. Spurious NVNT ac20 5240MHz Emission

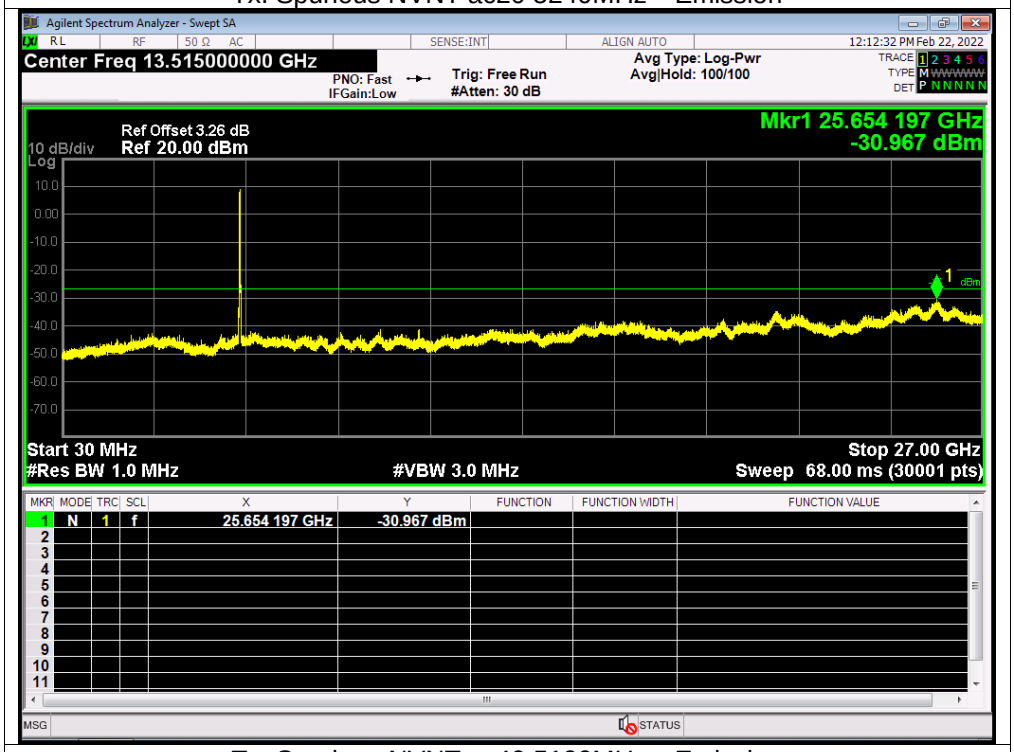

Tx. Spurious NVNT ac40 5190MHz Emission

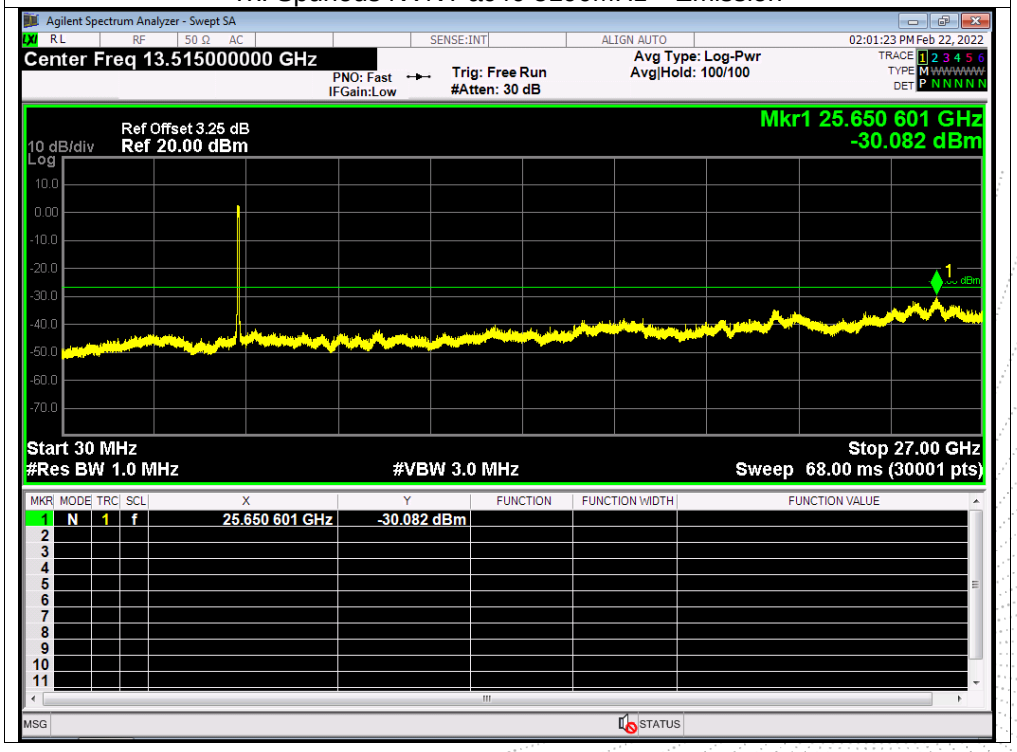

Tx. Spurious NVNT ac40 5230MHz Emission

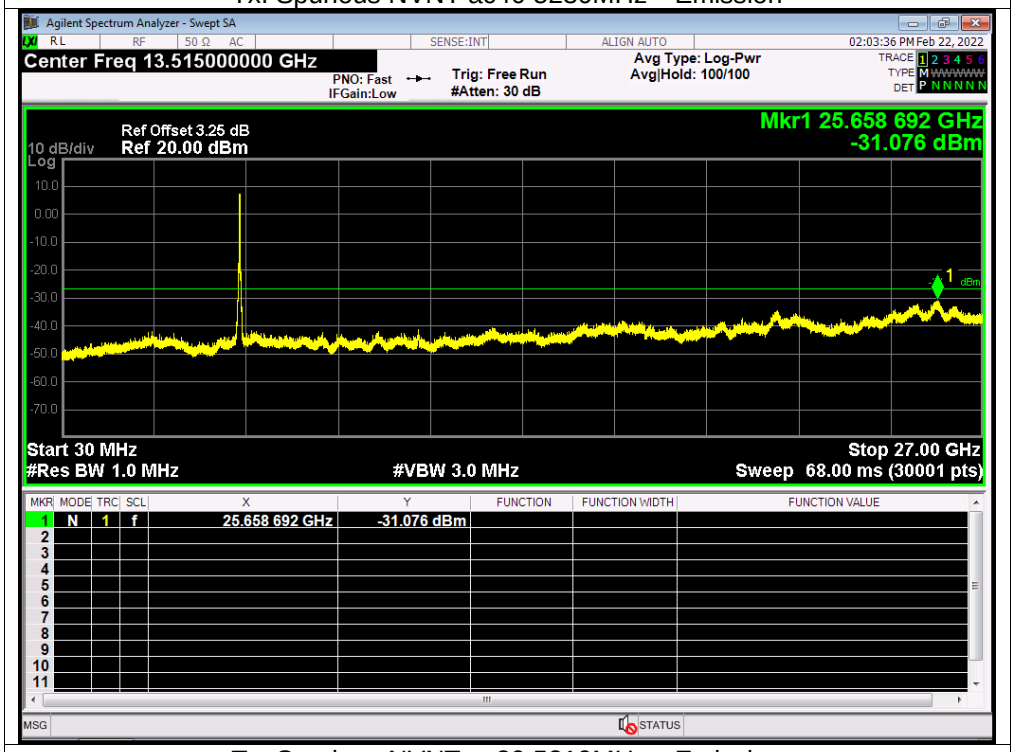

Tx. Spurious NVNT ac80 5210MHz Emission

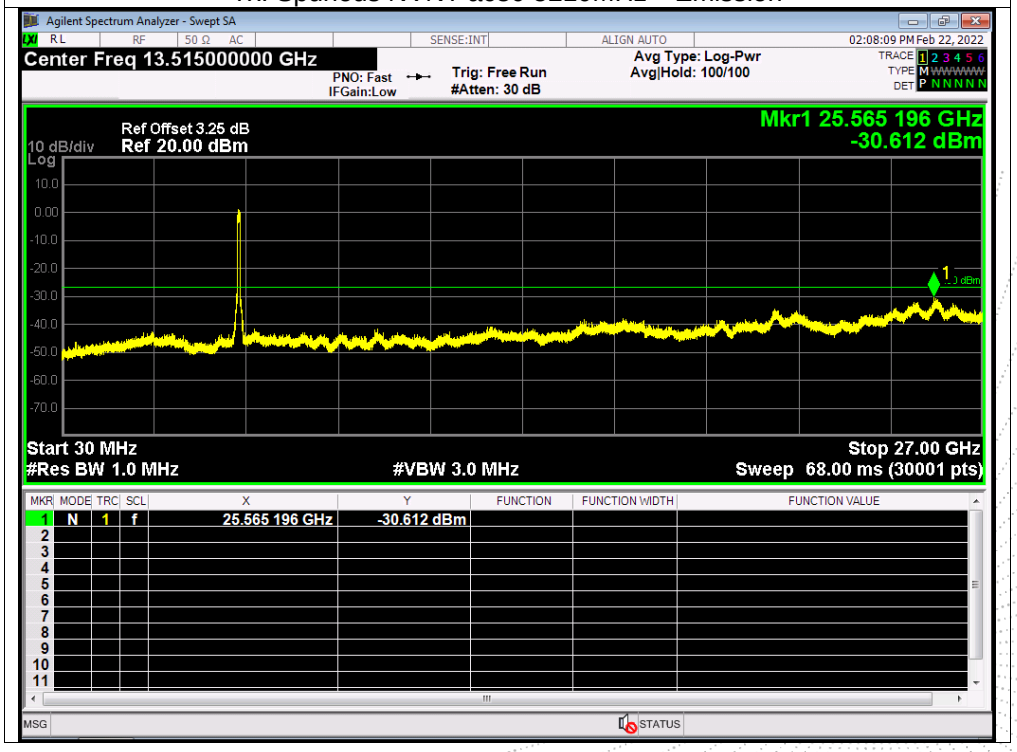

13. Frequency Stability Measurement

13.1 Block Diagram Of Test Setup

13.2 Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

13.3 Test procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. fc is declaring of channel frequency. Then the frequency error formula is (fc-f)/fc × 106 ppm and he limit is less than ±20ppm (IEEE 802.11nspecification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is -20°C~70°C.

13.4 Test Result

Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	TX (5.1G) Mode Frequency U-NII-1 (5180-5240MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency:5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5180.0181	5180	0.0181	3.4991
		V max (V)	138.00	5180.0008	5180	0.0008	0.1511
		V min (V)	102.00	5180.0080	5180	0.0080	1.5355
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency:5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5180.0007	5180	0.0007	0.1388
		T (°C)	-10	5180.0124	5180	0.0124	2.3928
		T (°C)	0	5180.0031	5180	0.0031	0.6033
		T (°C)	10	5180.0109	5180	0.0109	2.1109
		T (°C)	20	5180.0016	5180	0.0016	0.3049
		T (°C)	30	5180.0002	5180	0.0002	0.0335
		T (°C)	40	5180.0080	5180	0.0080	1.5421
		T (°C)	50	5180.0033	5180	0.0033	0.6299
		T (°C)	60	5180.0035	5180	0.0035	0.6805
		T (°C)	70	5180.0048	5180	0.0048	0.9257
Limits				5150-5250 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency:5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5200.0089	5200	0.0089	1.7148
		V max (V)	138.00	5200.0047	5200	0.0047	0.9054
		V min (V)	102.00	5200.0007	5200	0.0007	0.1387
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency:5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5200.00986	5200	0.00986	1.8960
		T (°C)	-10	5200.01207	5200	0.01207	2.3212
		T (°C)	0	5200.00299	5200	0.00299	0.5747
		T (°C)	10	5200.00579	5200	0.00579	1.1130
		T (°C)	20	5200.00693	5200	0.00693	1.3335
		T (°C)	30	5200.00242	5200	0.00242	0.4651
		T (°C)	40	5200.00985	5200	0.00985	1.8934
		T (°C)	50	5200.00320	5200	0.00320	0.6144
		T (°C)	60	5200.00644	5200	0.00644	1.2389
		T (°C)	70	5200.00651	5200	0.00651	1.2515
Limits				5150-5250 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency:5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5240.0109	5240	0.0109	2.0860
		V max (V)	138.00	5240.0044	5240	0.0044	0.8330
		V min (V)	102.00	5240.0033	5240	0.0033	0.6218
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency:5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5240.0005	5240	0.0005	0.0956
		T (°C)	-10	5240.0091	5240	0.0091	1.7392
		T (°C)	0	5240.0020	5240	0.0020	0.3737
		T (°C)	10	5240.0028	5240	0.0028	0.5417
		T (°C)	20	5240.0064	5240	0.0064	1.2286
		T (°C)	30	5240.0003	5240	0.0003	0.0505
		T (°C)	40	5240.0007	5240	0.0007	0.1419
		T (°C)	50	5240.0069	5240	0.0069	1.3208
		T (°C)	60	5240.0073	5240	0.0073	1.3856
		T (°C)	70	5240.0084	5240	0.0084	1.6053
Limits				5150-5250 MHz			
Result				Complies			

14. Antenna Requirement

14.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

14.2 Test Antenna

The EUT antenna is Internal antenna (antenna gain: 2dBi). It comply with the standard requirement.

15. EUT Photographs

EUT Photo 1

Appendix-Photographs Of EUT Constructional Details

16. EUT Test Setup Photographs

Conducted emissions

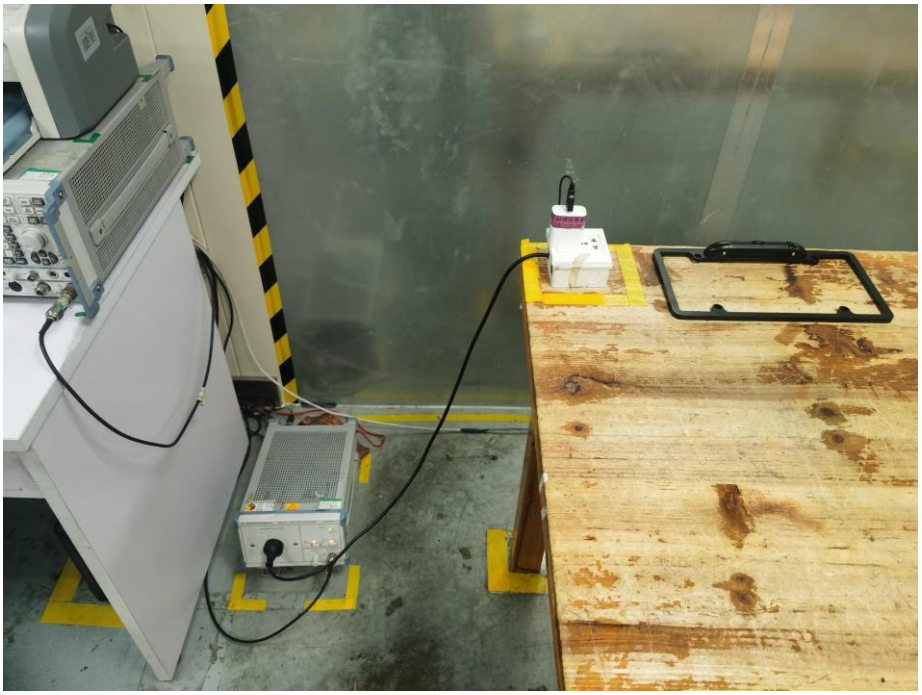

Radiated Measurement Photos

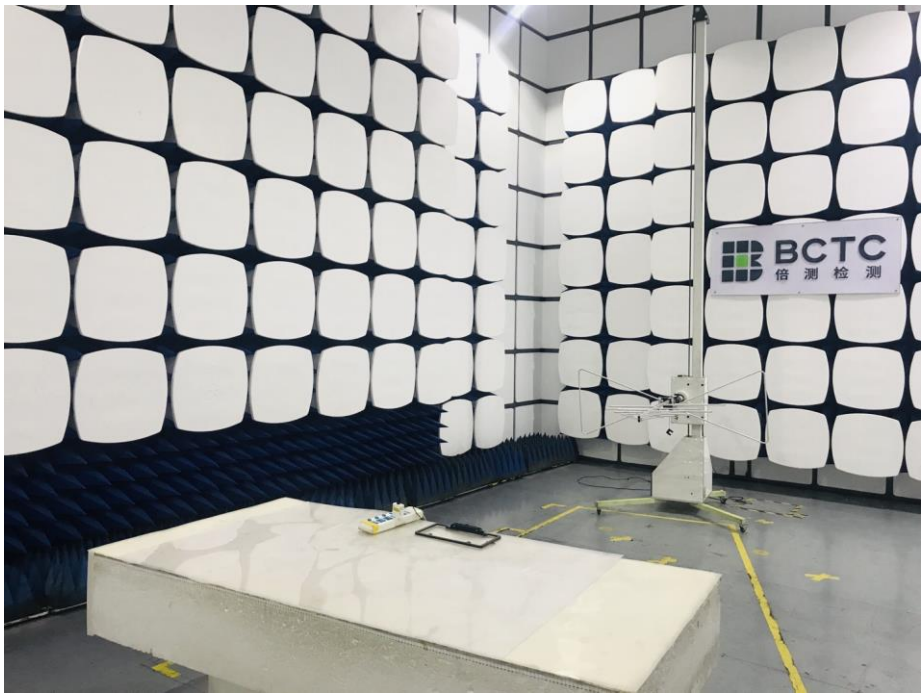

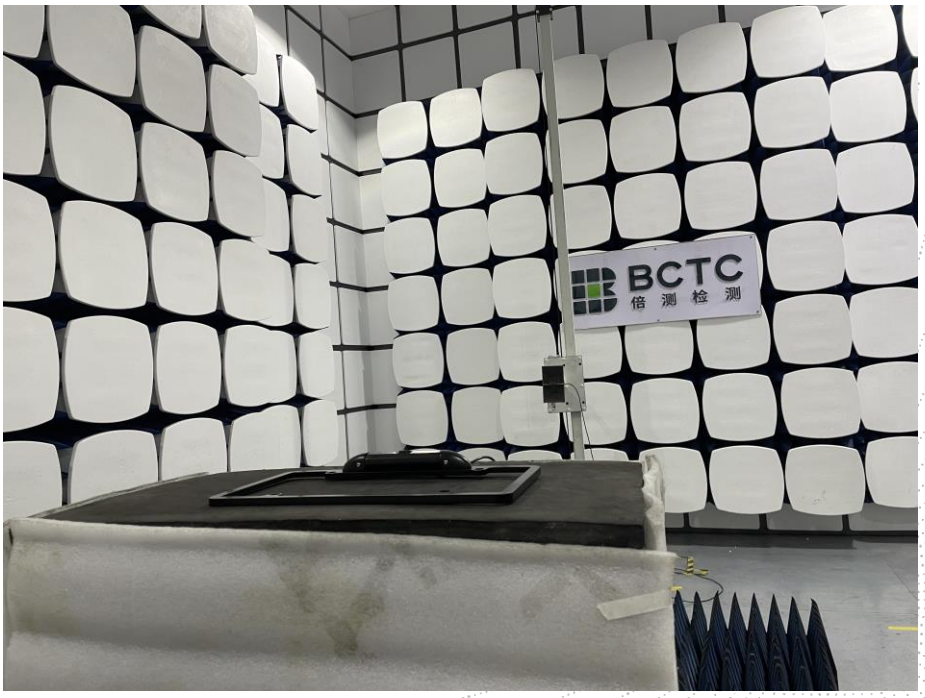

STATEMENT

1.The equipment lists are traceable to the national reference standards.

2.The test report can not be partially copied unless prior written approval is issued from our lab.

3.The test report is invalid without stamp of laboratory.

4.The test report is invalid without signature of person(s) testing and authorizing.

5.The test process and test result is only related to the Unit Under Test.

6.The quality system of our laboratory is in accordance with ISO/IEC17025.

7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:
1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: http://www.chnbctc.com

E-Mail: bctc@bctc-lab.com.cn

※※※※※ **END** ※※※※※