
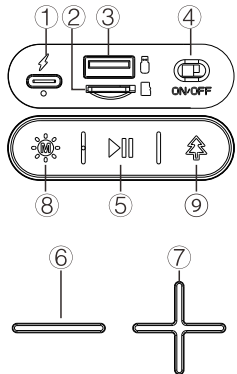

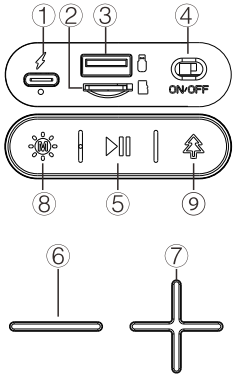


中英文说明书尺寸：50x100mm (5折页) 材料：70双胶(双面印刷) 折叠线不要印刷

BASS-26 使用说明书 	基本参数: -无线规格：版本5.4 支持无线协议： 支持L2CAP/A2DP/AVRCP，用来接收立体声音频信号，通过协议可以控制音频发射端的上下曲操作； 支持HSP/HFP(Handsfree profile)，具有免提功能，可以进行语音通讯 -无线传输范围：10M -音频性噪比：≥90db -电池容量： 3000mAh -内置电压：7.4V -正常音量播放：3H左右（因音频内容和音量而异） -喇叭规格：Ø 78mm*2 -喇叭功率：4Ω/30W*2 -频率响应：120Hz-20KHz -尺寸：326x150x157mm(不含提手) -单机重量：2070g -充电电压：5V/2A 功能特点 1、采用先进的无线音频解码芯片，支持设备连接。 2、支持FM收音，可直接搜索收听区	域的电台。 3、DSP音效音色柔和清晰有动感，各层次分明。 4、直读TF卡和U盘。 5、无线接收距离远可长达10米。 6、多种闪烁模式幻彩LED灯，灯光可随音乐旋律闪动一键转换，音乐旋律不止能听还能看。 7、支持TWS。 8、无线模式无连接，半小时关机。 9、支持户外EQ音频模式切换。 10、支持无线双话筒连接。 	1) DC 5V充电接口，(TYPE-C)。 2) TF卡输入接口：TF卡插入时可解码MP3格式的音频播放。 3) U盘输入接口：U盘插入时可解码MP3格式的音频播放。 4) 拨动开关：推到ON位时为开机、推到OFF位时为关机。 5) -音乐模式下（TF卡、U盘、无线），短按为播放/暂停”。 -在FM模式下短按为自动搜索电台、在搜台过程中短按一下为取消往后自动搜索电台。 -在无线模式并配对手机情况下，有电话接入时短按一下为免提接听，再短按一下为挂断电话，双击为重拨电话。 -连接上手机时，三击键断开手机连接。 6) 在音乐的模式下，短按为“上一曲”长按为“音量减”。 7) 在音乐的模式下，短按为“下一曲”长按为“音量加”。 8) 多功能键 -短按切换LED灯闪烁方式、三击关闭LED灯模式、再三击打开LED灯模式。 -音乐模式下（TF卡、U盘、无线、	FM），双击为功能模式切换。 -TWS: 两台音箱同时在开机无线 状态且都没有连接手机，长按其中一台音箱的M键2-3S听到提示音即连TWS成功，再连接手机即可；断开无线连接后再长按其中一台M键取消TWS功能。 9) 户外EQ键、音频播放中短按切换EQ音频模式。 备注： -在收音模式下，请插充电线增加收音信号强度，收音效果会更好；因幻彩LED灯对收音信号干扰、进入收音模式时会自动关闭幻彩LED灯。 -U盘和TF卡用（FAT32方式格式化） -不使用时请将拨动开关推到OFF。
--	---	--	---	--

BASS-26 USER MANUAL 	Product specifications: -Wireless: V5.4 Support: L2CAP/A2DP/AVRCP, can receive AUDIO signal and control the AUDIO device. Support HSP/HFP(Handsfree profile), with HANDS-FREE functions. -Working distance:10M -SNR: ≥90db -Battery: 7.4V about 3000mAh -Normal volume playing time: about 3 hours with LED light off -Speaker driver: Ø78mm*2 -Speaker Power: 4Ω/30W*2 -Frequency response:120Hz-20KHz -Unit size: 326x150x157mm -Unit weight: about 2070 g (not includ accessories) -Charging:5V/2A -Charging time:about 3 H Product Feature: 1.International advanced wireless chip and circuit design techniques, support wireless devices. 2.With FM function, can search radio station broadcast automatically. 3.With Hi-Fi speaker, to make sure the clear and bright sound. 4.Support Micro SD card and USB card, play MP3 format audio.	5.The wireless working distance is 10 meters. 6.A variety of flashing LED lights with different colors, color lights flash follow the melody. 7.Support TWS. 8.It will close automatically after 30 mins if disconnect Wireless . 9.Support outdoor EQ audio modes; 10.Supports wireless dual-microphone connection. Key and slot function: 1.DC 5V slot: Use the standard USB 	TYPE-C charging cable for power charging. 2.TF slot: It can decode and play MP3 format audio when put TF card into the slot. 3.USB slot: It can decode and play MP3 format audio when put the USB card into the slot. 4.Power switch: ON indicates the power-on state, while OFF indicates the power-off state. 5.Play/Pause -When play music, (USB card/TF card/Wireless) short press to play/pause. -In FM mode, a short press will automatically search for radio stations. During the search process, a short press will cancel the automatic search for radio stations in the future. -When in wireless mode and paired with a mobile phone, when a call comes in, a short press is for hands-free answering, another short press is for hanging up the call, and a double press is for redial. -When connecting to the mobile phone, press three keys to disconnect the phone. 6.When play music, press short for next song, long press to turn up the volume. 7.When play music, Press short for last song, long press to turn down the	volume. 8.Multi-functional key -Press short for option of the LED flashing light, press three times to turn off the LED light mode, and press three times to turn on the LED light mode. . -When play music, double-clicking to switch model (USB card/TF card/Wireless/FM); -TWS:Keep the two speaker under Wireless mode without pairing, press the button for 2-3 seconds either of the speaker until hear a hint , now it is TWS mode ,then can paire the mobile, Disconnect the wireless connection and then long press the button to cancel the TWS function. 9.Outdoor EQ key: short press it to switch to audio mode when playing audio. NOTE: -In the FM mode, put in charging cable to increase the FM radio signal ; the LED flashling light will close auto when switch to FM model. -USB (32Gmax) /TF card (32Gmax) pls use FAT32 format. -Please push the toggle switch to OFF when not in use.
--	---	--	---	---

FCC Warning Statement:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The device has been evaluated to meet general RF exposure requirement.