



FCC Part 15C Test Report

FCC ID: 2A4PJ-202222Z

Applicant: shenzhenshiyimukejiyouxiangongsi

Address: 6B zhonggangchengxinjinge, No. 3004 Fuqiang Road, Xingang Community, Fubao Street, Futian District, Shenzhen, Guangdong

Manufacturer: SKY WING COMMUNICATION ELECTRONICS CO., LTD

Address: No.62, 10th Road, Longyan, Humen Town, Dongguan City, Guangdong, China

EUT: M6S Wireless headset with microphone

Trade Mark: N/A

Model Number: BH-M6S

Date of Receipt: Feb. 18, 2022

Test Date: Feb. 18, 2022 - Feb. 25, 2022

Date of Report: Feb. 25, 2022

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Applicable Standards: FCC PART 15 C 15.249
ANSI C63.10: 2013

Test Result: Pass

Report Number: DL-20220225027E

Prepared (Test Engineer): Pxing Huang

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1. SUMMARY OF TEST RESULTS.....	4
1.1 MEASUREMENT UNCERTAINTY.....	4
2. GENERAL INFORMATION.....	5
2.1 GENERAL DESCRIPTION OF EUT.....	5
2.2 DESCRIPTION OF TEST MODES.....	6
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED.....	6
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE).....	6
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS.....	7
3. EMC EMISSION TEST.....	8
3.1 CONDUCTED EMISSION MEASUREMENT.....	8
3.1.1 POWER LINE CONDUCTED EMISSION Limits.....	8
3.1.2 TEST PROCEDURE.....	8
3.1.3 DEVIATION FROM TEST STANDARD.....	8
3.1.4 TEST SETUP.....	9
3.1.5 EUT OPERATING CONDITIONS.....	9
3.1.6 TEST RESULTS.....	9
3.2 RADIATED EMISSION MEASUREMENT.....	12
3.2.1 RADIATED EMISSION LIMITS.....	12
3.2.2 TEST PROCEDURE.....	13
3.2.3 DEVIATION FROM TEST STANDARD.....	13
3.2.4 TEST SETUP.....	13
3.2.5 EUT OPERATING CONDITIONS.....	14
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	15
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	16
3.2.8 TEST RESULTS (1GHZ~25GHZ).....	18
3.3 RADIATED BAND EMISSION MEASUREMENT.....	19
3.3.1 TEST REQUIREMENT:.....	19
3.3.2 TEST PROCEDURE.....	19
3.3.3 DEVIATION FROM TEST STANDARD.....	19
3.3.4 TEST SETUP.....	20
3.3.5 EUT OPERATING CONDITIONS.....	20
4. BANDWIDTH TEST.....	22
4.1 APPLIED PROCEDURES / LIMIT.....	22
4.1.1 TEST PROCEDURE.....	22
4.1.2 DEVIATION FROM STANDARD.....	22
4.1.3 TEST SETUP.....	22
4.1.4 EUT OPERATION CONDITIONS.....	22
4.1.5 TEST RESULTS.....	23



Table of Contents	Page
5. ANTENNA REQUIREMENT.....	28
5.1 STANDARD REQUIREMENT.....	28
5.2 EUT ANTENNA.....	28
6. TEST SEUUP PHOTO.....	29



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.249) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	Pass	
15.249(c)	Fundamental & Radiated Spurious Emission Measurement	PASS	
15.205	Band Edge Emission	PASS	
15.215	20dB Bandwidth	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.42\text{dB}$
3	Spurious emissions, conducted	$\pm 2.76\text{dB}$
4	All emissions, radiated (<1G)	$\pm 3.65\text{dB}$
5	All emissions, radiated (>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

1.2 TEST FACILITY

Shenzhen DL Testing Technology Co., Ltd.

Add.: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: CN0118



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	M6S Wireless headset with microphone
Trademark	N/A
Model No.:	BH-M6S
Model Difference:	N/A
Sample No.:	DL-20220223018E#
Operation Frequency:	2402~2480MHz
Channel numbers:	79 Channels
Channel separation:	1M
Modulation technology:	GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna Type:	PCB Antenna
Antenna gain:	0dBi
Power supply:	DC 5V/200A from Adapter; DC 3.7V from Battery

Note:

1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.The EUT's all information provided by client.

3.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	21	2423	42	2444	63	2465
01	2403	22	2424	43	2445	64	2466
02	2404	23	2425	44	2446	65	2467
03	2405	24	2426	45	2447	66	2468
04	2406	25	2427	46	2448	67	2469
05	2407	26	2428	47	2449	68	2470
06	2408	27	2429	48	2450	69	2471
07	2409	28	2430	49	2451	70	2472
08	2410	29	2431	50	2452	71	2473
09	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460		
17	2419	38	2440	59	2461		
18	2420	39	2441	60	2462		
19	2421	40	2442	61	2463		
20	2422	41	2443	62	2464		



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description	
Mode 1	CH00	
Mode 2	CH39	
Mode 3	CH78	

Note:


(1) The measurements are performed at the highest, middle, lowest available channels.

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conducted Spurious Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	M6S Wireless headset with microphone	BH-M6S	N/A	EUT
E-2	Adapter	GAT-0501000	N/A	AE
E3	Notebook	Lenovo G475	GB14477457	AE

Note:

(1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

Test software Version	Test program: InstallBlueSuite2_4_8		
Frequency	2402 MHz	2441MHz	2480 MHz



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Dec. 06, 2021	Dec. 05, 2022
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Dec. 06, 2021	Dec. 05, 2022
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Dec. 06, 2021	Dec. 05, 2022
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Dec. 06, 2021	Dec. 05, 2022
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Dec. 06, 2021	Dec. 05, 2022
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Dec. 06, 2021	Dec. 05, 2022
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Dec. 06, 2021	Dec. 05, 2022
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Dec. 06, 2021	Dec. 05, 2022
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Dec. 06, 2021	Dec. 05, 2022
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Dec. 06, 2021	Dec. 05, 2022
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Dec. 06, 2021	Dec. 05, 2022
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Dec. 06, 2021	Dec. 05, 2022
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Dec. 06, 2021	Dec. 05, 2022
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Dec. 06, 2021	Dec. 05, 2022
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Dec. 06, 2021	Dec. 05, 2022
16	D.C. Power Supply	LongWei	PS-305D	010964729	Dec. 06, 2021	Dec. 05, 2022

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Nov. 25, 2019	Nov. 24, 2022
2	EMI Receiver	R&S	ESR	101421	Dec. 06, 2021	Dec. 05, 2022
3	LISN	R&S	ENV216	102417	Dec. 06, 2021	Dec. 05, 2022
4	843 Cable 1#	ChengYu	CE Cable	001	Dec. 06, 2021	Dec. 05, 2022

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

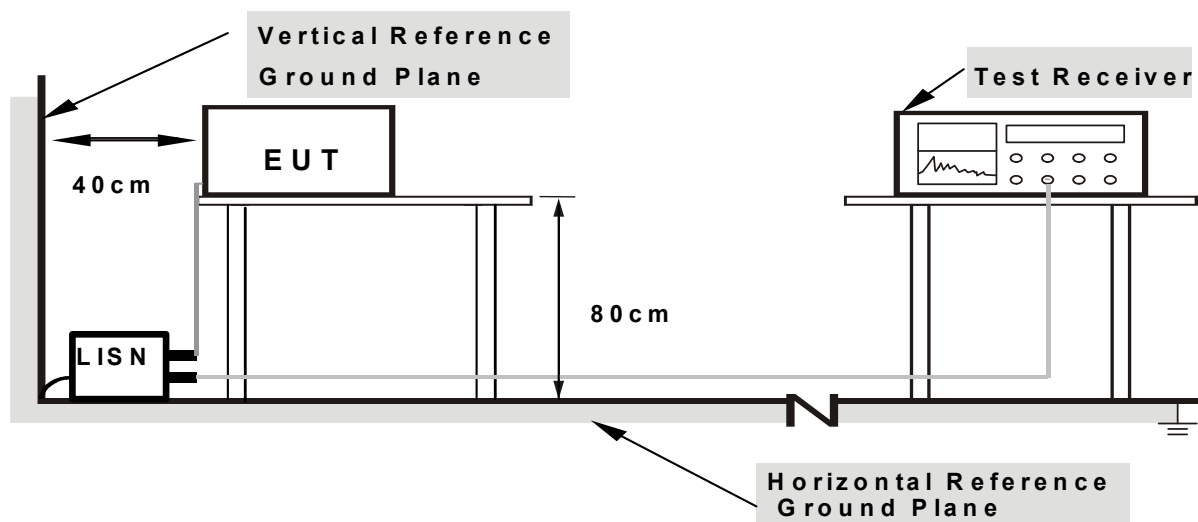

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.1.6 TEST RESULTS

Note: 1. All modes were tested at AC 120V and 240V, only the worst result of AC 120V was reported.
2. All modes of GFSK, $\pi/4$ DQPSK, 8DPSK were test at Low, Middle, and High channel, only the worst result of GFSK High Channel was reported as below:



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage:	AC 120V/60Hz		
Test Mode:	Mode 3		

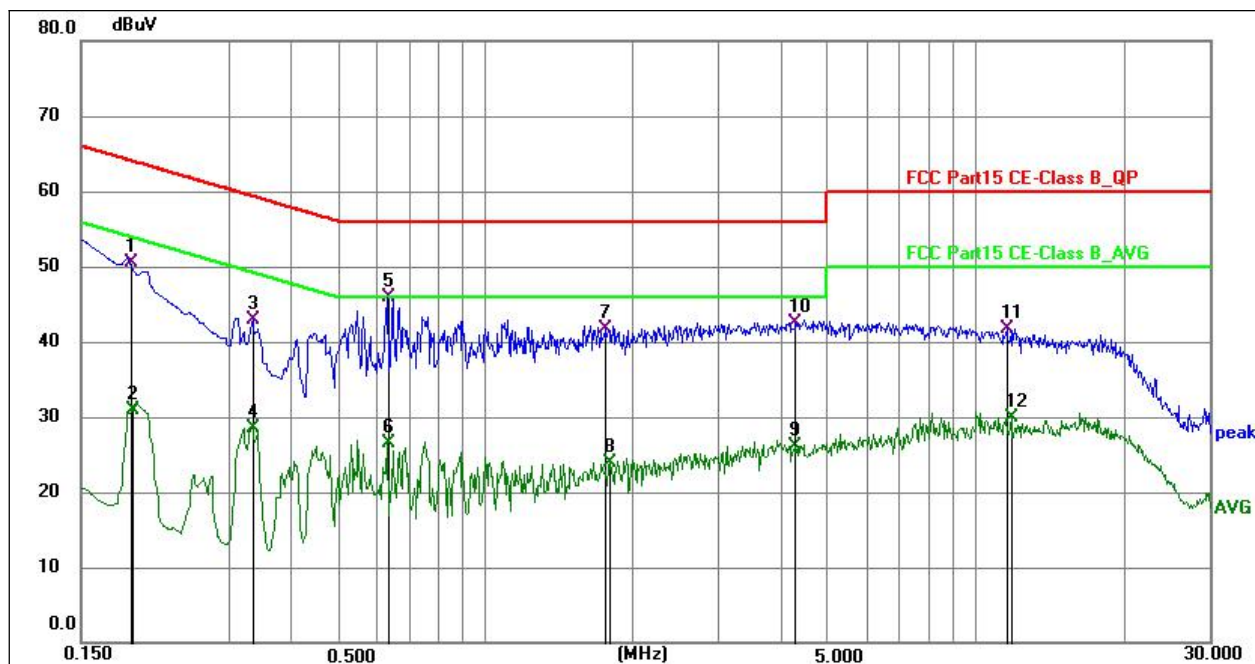


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1883	40.14	10.31	50.45	64.11	-13.66	QP
2	0.1905	20.65	10.31	30.96	54.01	-23.05	AVG
3	0.3345	32.62	10.33	42.95	59.34	-16.39	QP
4	0.3345	18.22	10.33	28.55	49.34	-20.79	AVG
5 *	0.6315	35.48	10.34	45.82	56.00	-10.18	QP
6	0.6315	16.09	10.34	26.43	46.00	-19.57	AVG
7	1.7564	31.23	10.39	41.62	56.00	-14.38	QP
8	1.7969	13.53	10.39	23.92	46.00	-22.08	AVG
9	4.2809	15.74	10.45	26.19	46.00	-19.81	AVG
10	4.3125	32.04	10.45	42.49	56.00	-13.51	QP
11	11.6020	31.03	10.59	41.62	60.00	-18.38	QP
12	11.8134	19.23	10.59	29.82	50.00	-20.18	AVG



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage:	AC 120V/60Hz		
Test Mode:	Mode 3		

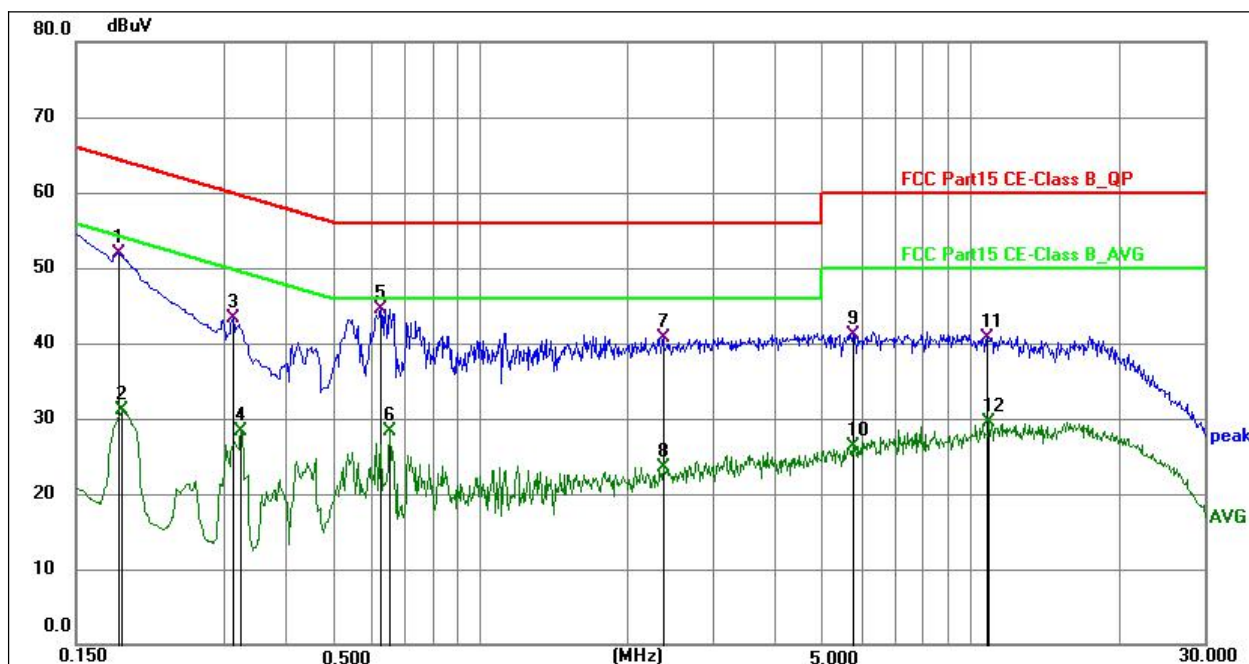

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1833	41.50	10.31	51.81	64.33	-12.52	QP
2	0.1859	20.77	10.31	31.08	54.22	-23.14	AVG
3	0.3119	32.90	10.33	43.23	59.92	-16.69	QP
4	0.3251	17.92	10.33	28.25	49.58	-21.33	AVG
5 *	0.6270	34.24	10.34	44.58	56.00	-11.42	QP
6	0.6540	17.98	10.34	28.32	46.00	-17.68	AVG
7	2.3685	30.30	10.40	40.70	56.00	-15.30	QP
8	2.3685	13.09	10.40	23.49	46.00	-22.51	AVG
9	5.7469	30.54	10.48	41.02	60.00	-18.98	QP
10	5.7469	15.90	10.48	26.38	50.00	-23.62	AVG
11	10.8460	30.16	10.57	40.73	60.00	-19.27	QP
12	10.9090	18.85	10.57	29.42	50.00	-20.58	AVG

**3.2 RADIATED EMISSION MEASUREMENT****3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)**

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
902 - 928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Receiver setup:

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average



3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

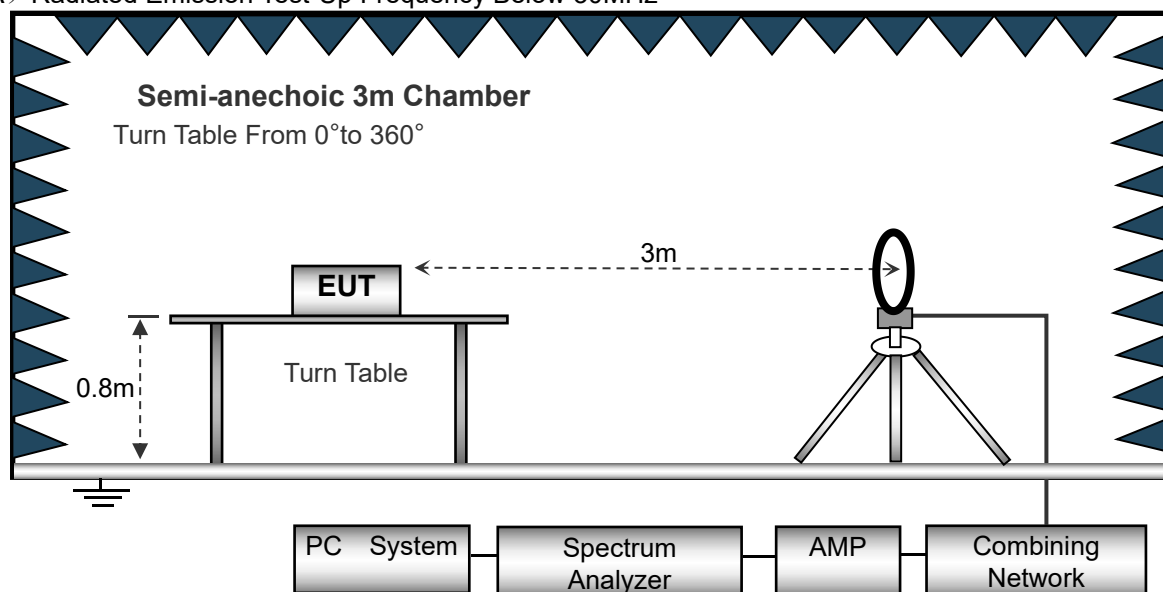

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

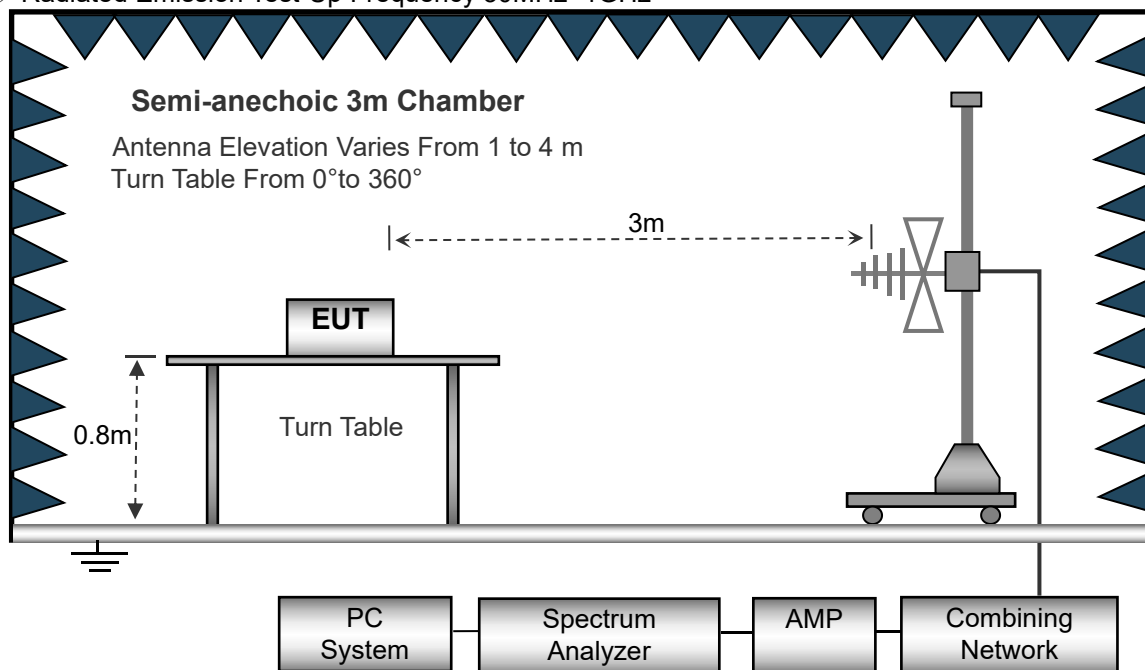

(C) Radiated Emission Test-Up Frequency Above 1GHz

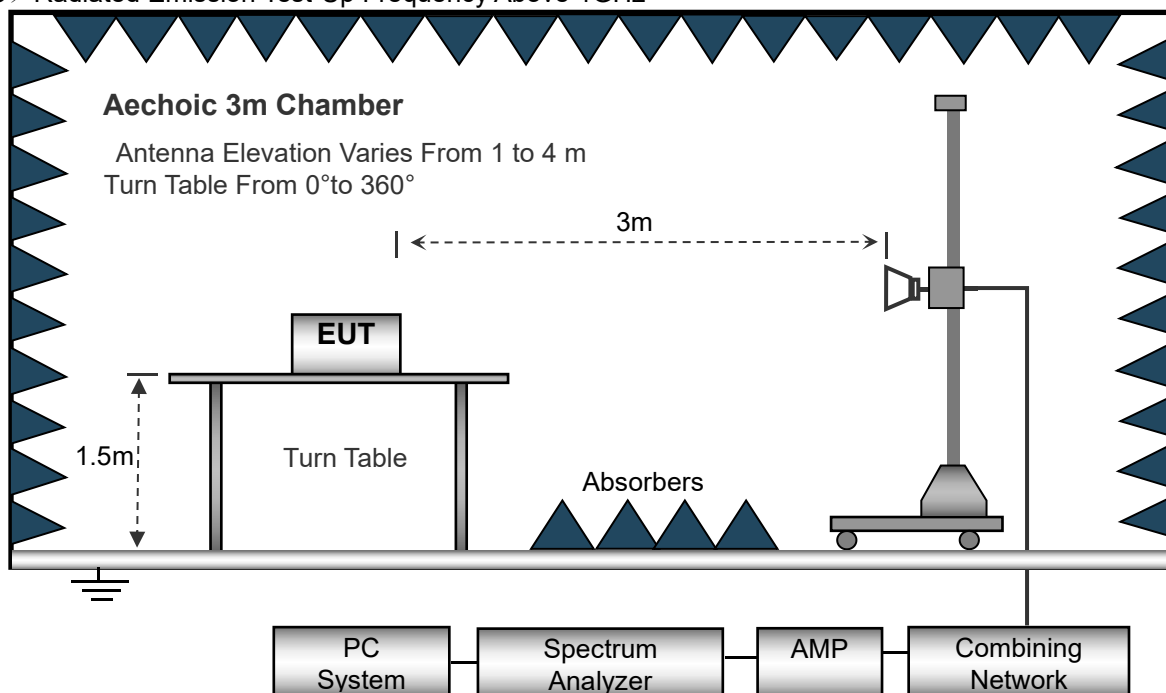

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 3	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);


Limit line = specific limits(dBuv) + distance extrapolation factor.



3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

Note: 1. All modes of GFSK, $\pi/4$ DQPSK, 8DPSK were test at Low, Middle, and High channel, only the worst result of GFSK High Channel was reported for below 1GHz test.

Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 3		

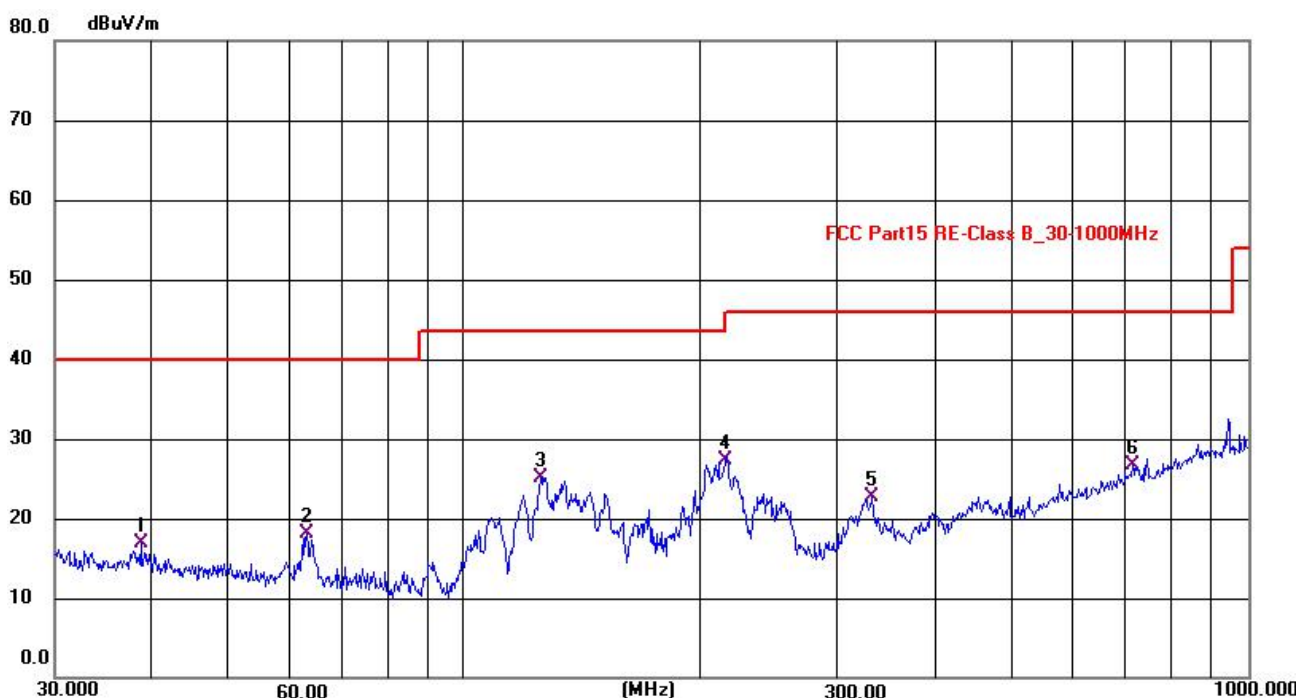

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	38.7109	30.58	-13.58	17.00	40.00	-23.00	QP
2	63.0031	34.62	-16.55	18.07	40.00	-21.93	QP
3	125.2698	41.75	-16.62	25.13	43.50	-18.37	QP
4 *	215.9861	45.19	-17.87	27.32	43.50	-16.18	QP
5	331.5289	36.84	-14.07	22.77	46.00	-23.23	QP
6	713.7978	32.80	-6.12	26.68	46.00	-19.32	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 1		

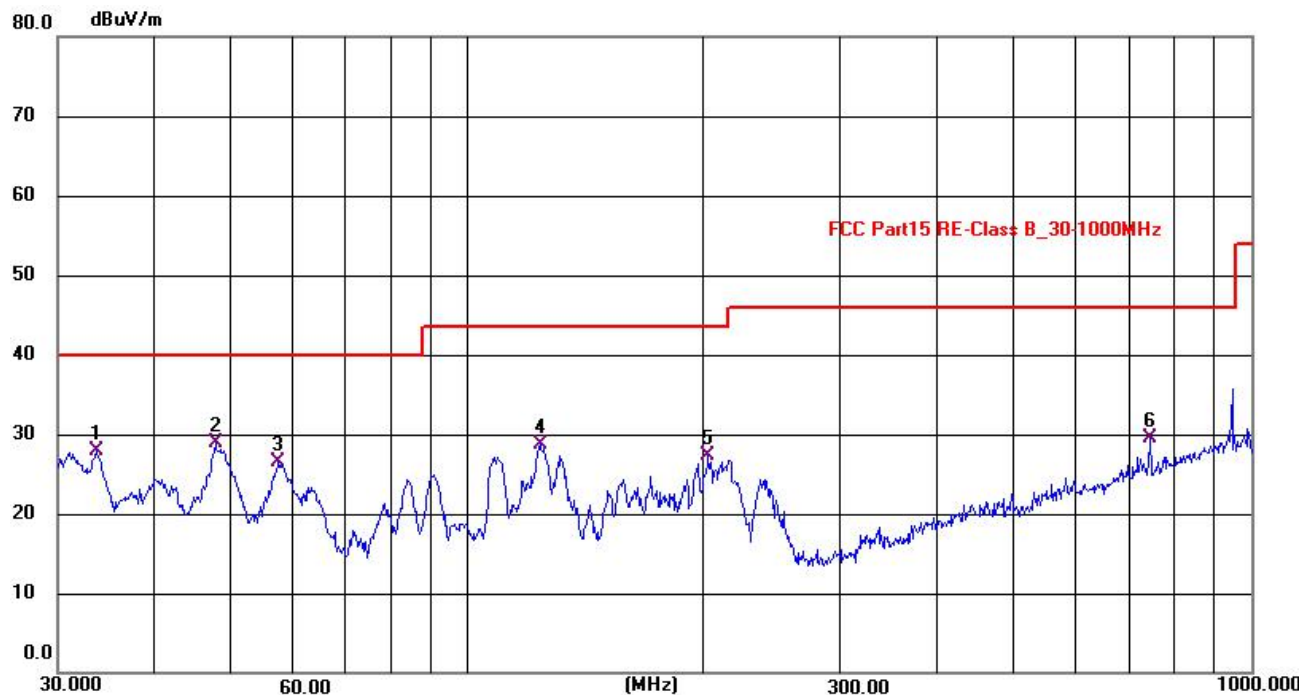

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	33.6449	41.57	-13.76	27.81	40.00	-12.19	QP
2 *	47.8176	43.74	-14.80	28.94	40.00	-11.06	QP
3	57.5535	42.37	-15.96	26.41	40.00	-13.59	QP
4	124.0894	45.42	-16.70	28.72	43.50	-14.78	QP
5	202.9882	45.62	-18.35	27.27	43.50	-16.23	QP
6	742.5190	35.12	-5.64	29.48	46.00	-16.52	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



3.2.8 TEST RESULTS (1GHZ~25GHZ)

GFSK Worst Case

Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type	Comment
(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
2402MHz									
2402	99.09	26.67	2.76	51.45	77.07	94.00	-16.93	Average	Vertical
2402	125.78	26.67	2.76	51.45	103.76	114.00	-10.24	peak	Vertical
4804	61.07	27.41	3.08	52.16	39.40	54.00	-14.60	Average	Vertical
4804	75.34	27.41	3.08	52.16	53.67	74.00	-20.33	peak	Vertical
7206	61.46	31.25	4.33	51.74	45.30	54.00	-8.70	Average	Vertical
7206	77.21	31.25	4.33	51.74	61.05	74.00	-12.95	peak	Vertical
2402	99.64	26.67	2.76	51.45	77.62	94.00	-16.38	Average	Horizontal
2402	126.33	26.67	2.76	51.45	104.31	114.00	-9.69	peak	Horizontal
4804	60.17	27.41	3.08	52.16	38.50	54.00	-15.50	Average	Horizontal
4804	74.24	27.41	3.08	52.16	52.57	74.00	-21.43	peak	Horizontal
7206	61.15	31.25	4.33	51.74	44.99	54.00	-9.01	Average	Horizontal
7206	75.22	31.25	4.33	51.74	59.06	74.00	-14.94	peak	Horizontal
2440MHz									
2440	99.29	26.76	2.79	51.67	77.17	94.00	-16.83	Average	Vertical
2440	125.78	26.76	2.79	51.67	103.66	114.00	-10.34	peak	Vertical
4880	61.17	27.47	3.12	52.11	39.65	54.00	-14.35	Average	Vertical
4880	76.11	27.47	3.12	52.11	54.59	74.00	-19.41	peak	Vertical
7320	62.22	31.34	4.37	51.77	46.16	54.00	-7.84	Average	Vertical
7320	78.09	31.34	4.37	51.77	62.03	74.00	-11.97	peak	Vertical
2440	99.23	26.23	2.56	51.34	76.68	94.00	-17.32	Average	Horizontal
2440	125.14	26.23	2.56	51.34	102.59	114.00	-11.41	peak	Horizontal
4880	62.09	32.11	3.12	52.11	45.21	54.00	-8.79	Average	Horizontal
4880	76.21	32.11	3.12	52.11	59.33	74.00	-14.67	peak	Horizontal
7320	62.08	24.33	4.37	51.77	39.01	54.00	-14.99	Average	Horizontal
7320	77.37	24.33	4.37	51.77	54.30	74.00	-19.70	peak	Horizontal
2480MHz									
2480	99.32	26.95	2.83	51.98	77.12	94.00	-16.88	Average	Vertical
2480	125.37	26.95	2.83	51.98	103.17	114.00	-10.83	peak	Vertical
4960	61.36	27.44	3.34	52.23	39.91	54.00	-14.09	Average	Vertical
4960	76.18	27.44	3.34	52.23	54.73	74.00	-19.27	peak	Vertical
7440	63.29	31.39	4.57	51.69	47.56	54.00	-6.44	Average	Vertical
7440	78.77	31.39	4.57	51.69	63.04	74.00	-10.96	peak	Vertical
2480	99.34	26.95	2.83	51.98	77.14	94.00	-16.86	Average	Horizontal
2480	125.77	26.95	2.83	51.98	103.57	114.00	-10.43	peak	Horizontal
4960	62.63	27.44	3.34	52.23	41.18	54.00	-12.82	Average	Horizontal
4960	76.78	27.44	3.34	52.23	55.33	74.00	-18.67	peak	Horizontal
7440	61.21	31.39	4.57	51.69	45.48	54.00	-8.52	Average	Horizontal
7440	77.04	31.39	4.57	51.69	61.31	74.00	-12.69	peak	Horizontal

Note:

- 1.Absolute Level= ReadingLevel+antenna Factor+cable loss-preamp factor.
- 2.Over Limit= Absolute Level - Limit.
- 3.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has not to be reported.
- 4.EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report (Z orientation)



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

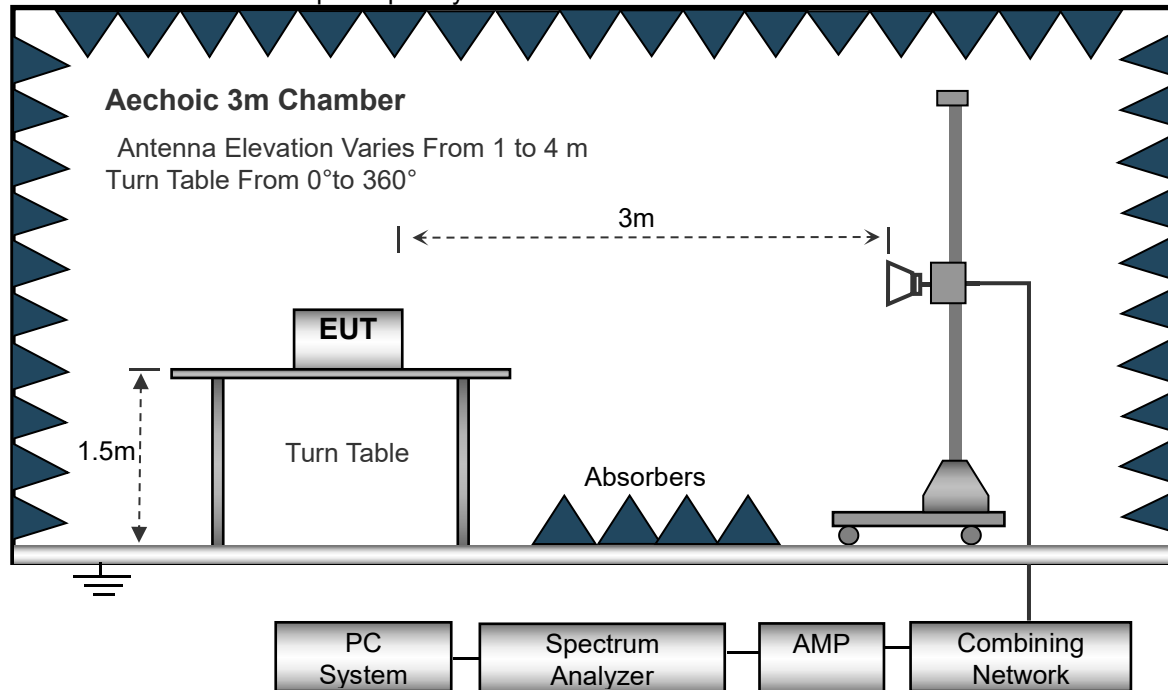

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



3.3.6 TEST RESULT

GFSK Worst Case

Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type	Comment
(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
2402MHz									
2390	61.34	27.38	2.73	52.12	39.33	54.00	-14.67	Average	Vertical
2390	74.98	27.38	2.73	52.12	52.97	74.00	-21.03	peak	Vertical
2400	60.15	27.41	2.78	52.16	38.18	54.00	-15.82	Average	Vertical
2400	75.23	27.41	2.78	52.16	53.26	74.00	-20.74	peak	Vertical
2390	60.27	27.38	2.73	52.12	38.26	54.00	-15.74	Average	Horizontal
2390	74.82	27.38	2.73	52.12	52.81	74.00	-21.19	peak	Horizontal
2400	61.15	27.41	2.78	52.16	39.18	54.00	-14.82	Average	Horizontal
2400	75.38	27.41	2.78	52.16	53.41	74.00	-20.59	peak	Horizontal
2480MHz									
2483.5	60.15	27.44	2.86	52.23	38.22	54.00	-15.78	Average	Vertical
2483.5	73.64	27.44	2.86	52.23	51.71	74.00	-22.29	peak	Vertical
2500	60.34	27.49	2.88	52.26	38.45	54.00	-15.55	Average	Vertical
2500	74.92	27.49	2.88	52.26	53.03	74.00	-20.97	peak	Vertical
2483.5	60.63	27.44	2.86	52.23	38.70	54.00	-15.30	Average	Horizontal
2483.5	75.98	27.44	2.86	52.23	54.05	74.00	-19.95	peak	Horizontal
2500	62.08	27.49	2.88	52.26	40.19	54.00	-13.81	Average	Horizontal
2500	74.14	27.49	2.88	52.26	52.25	74.00	-21.75	peak	Horizontal

Note:

1. Absolute Level= ReadingLevel+antenna Factor+cable loss-preamp factor.

2. Over Limit= Absolute Level - Limit.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has not to be reported.

4. EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report (Z orientation)



4. BANDWIDTH TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.249) , Subpart C	
Section	Test Item
15.249	Bandwidth

4.1.1 TEST PROCEDURE

1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3\text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




4.1.5 TEST RESULTS

	Frequency (MHz)	20dB Bandwidth (MHz)	Result
GFSK	2402	0.909	Pass
	2441	0.857	Pass
	2480	0.870	Pass


	Frequency (MHz)	20dB Bandwidth (MHz)	Result
$\pi/4$ DQPSK	2402	1.204	Pass
	2441	1.220	Pass
	2480	1.221	Pass

	Frequency (MHz)	20dB Bandwidth (MHz)	Result
8DPSK	2402	1.208	Pass
	2441	1.208	Pass
	2480	1.210	Pass

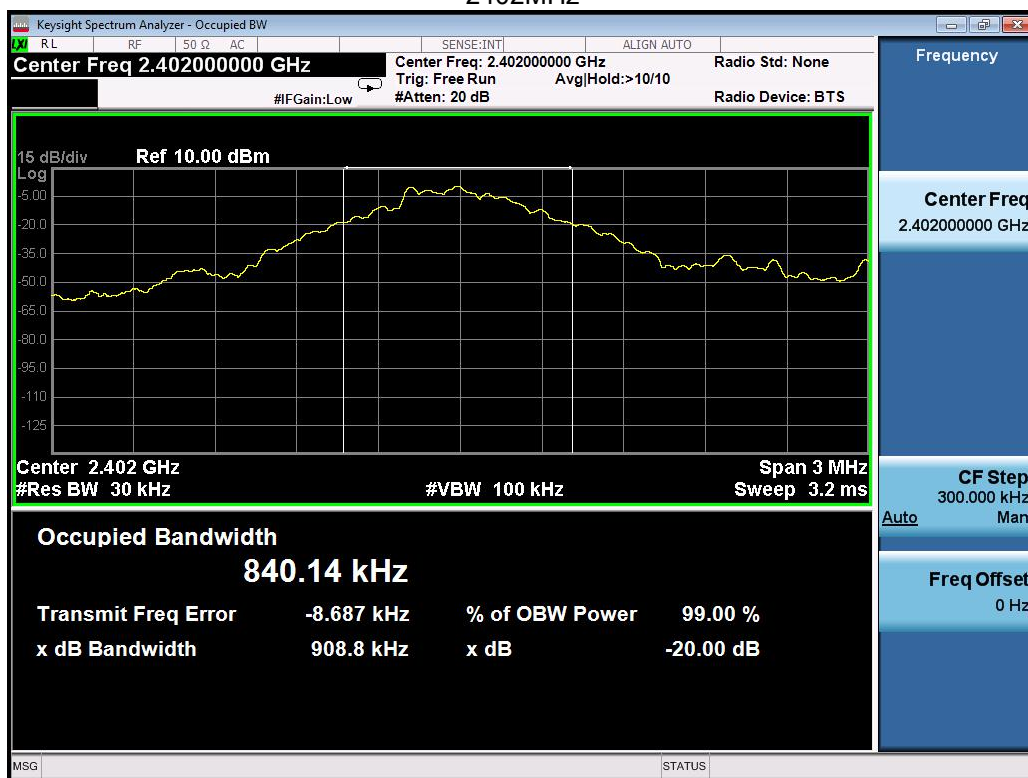
GFSK
2402MHz



2441MHz

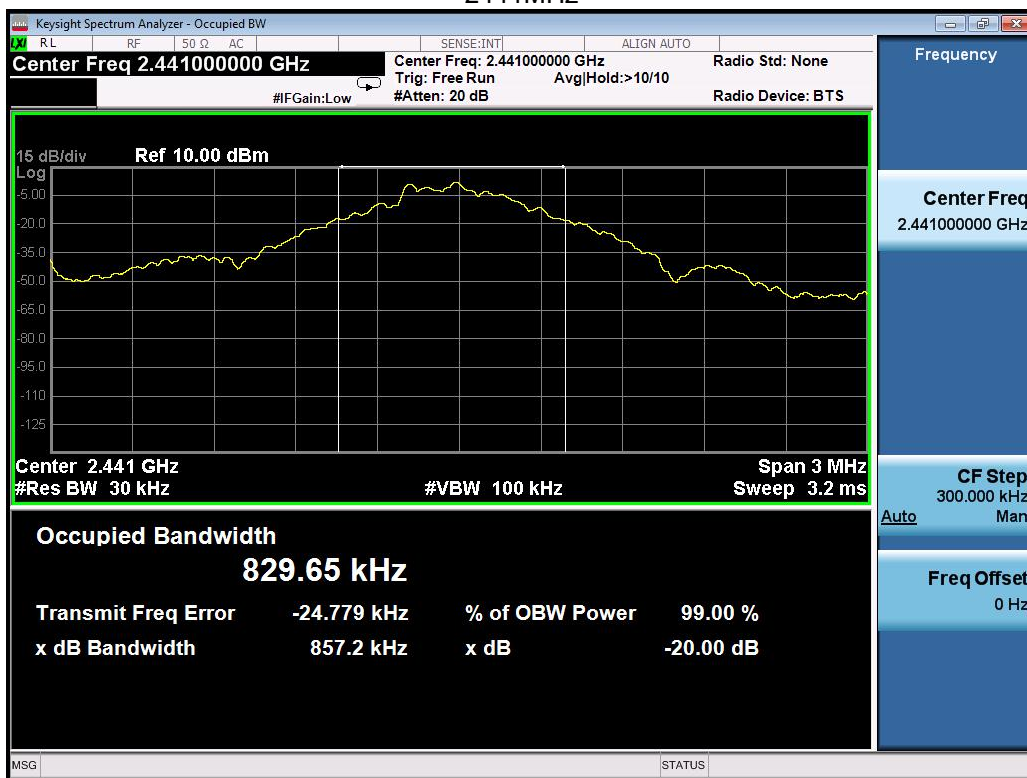


2480MHz

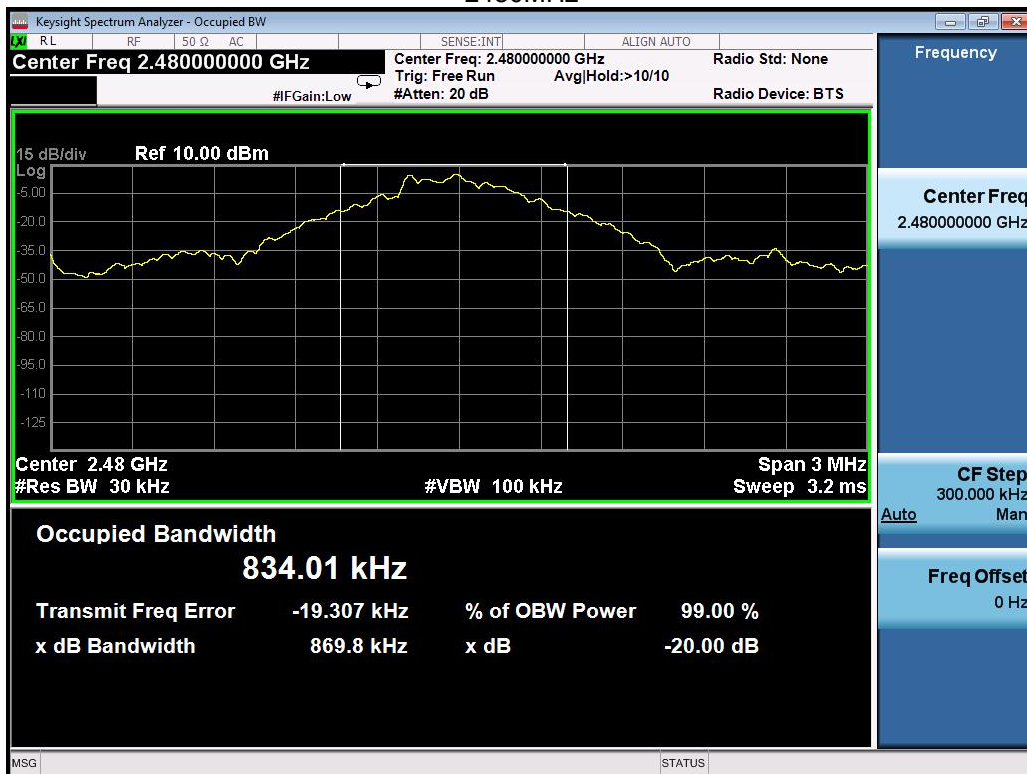




$\pi/4$ DQPSK
2402MHz

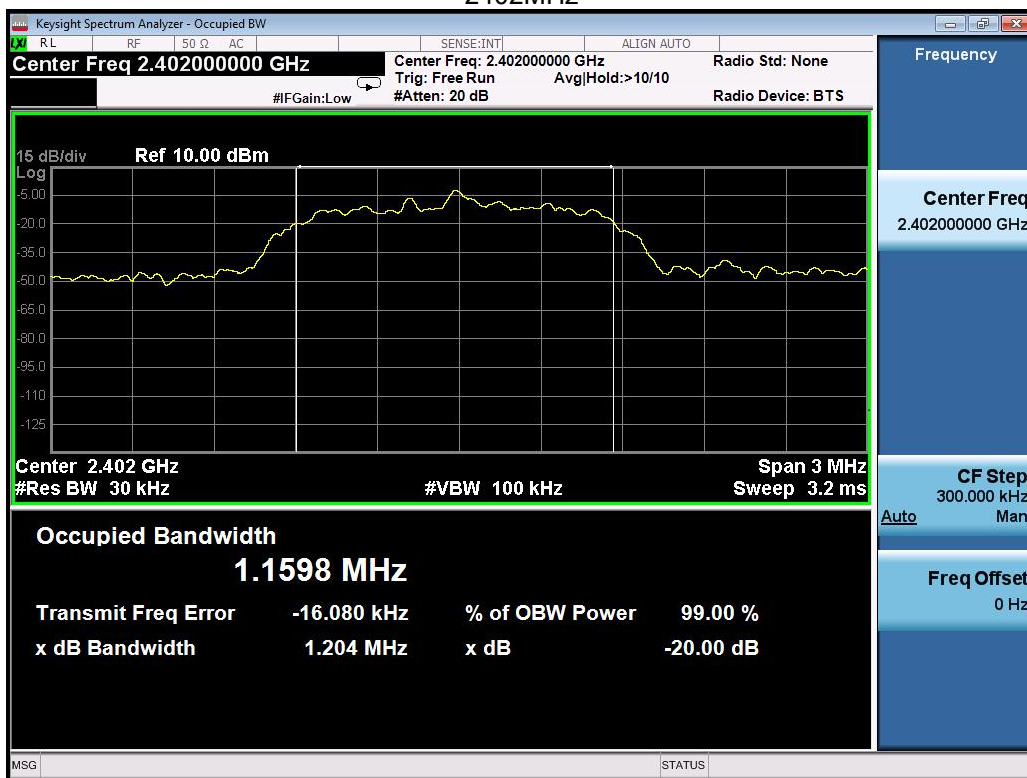


2441MHz

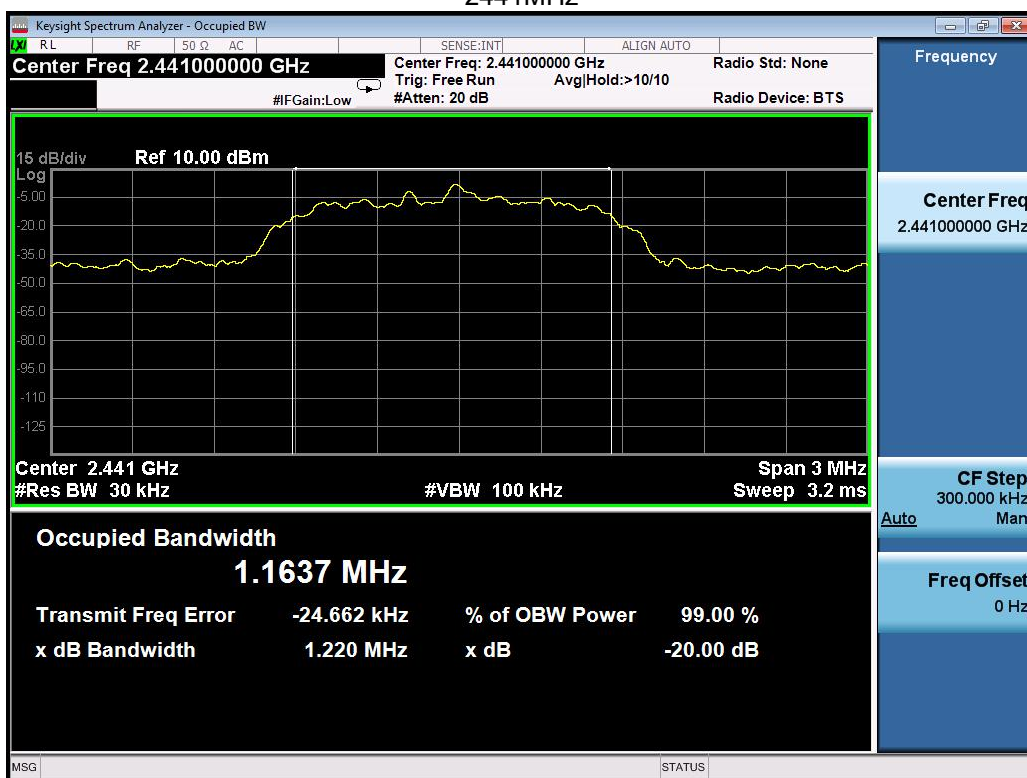




2480MHz

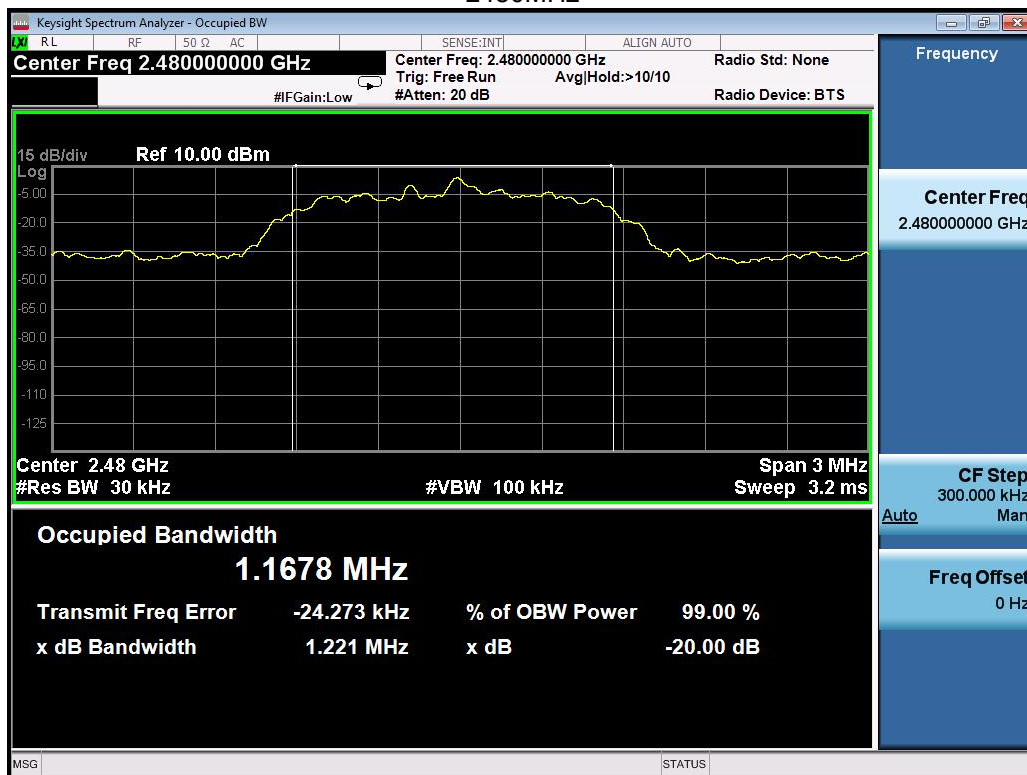


8DPSK

2402MHz

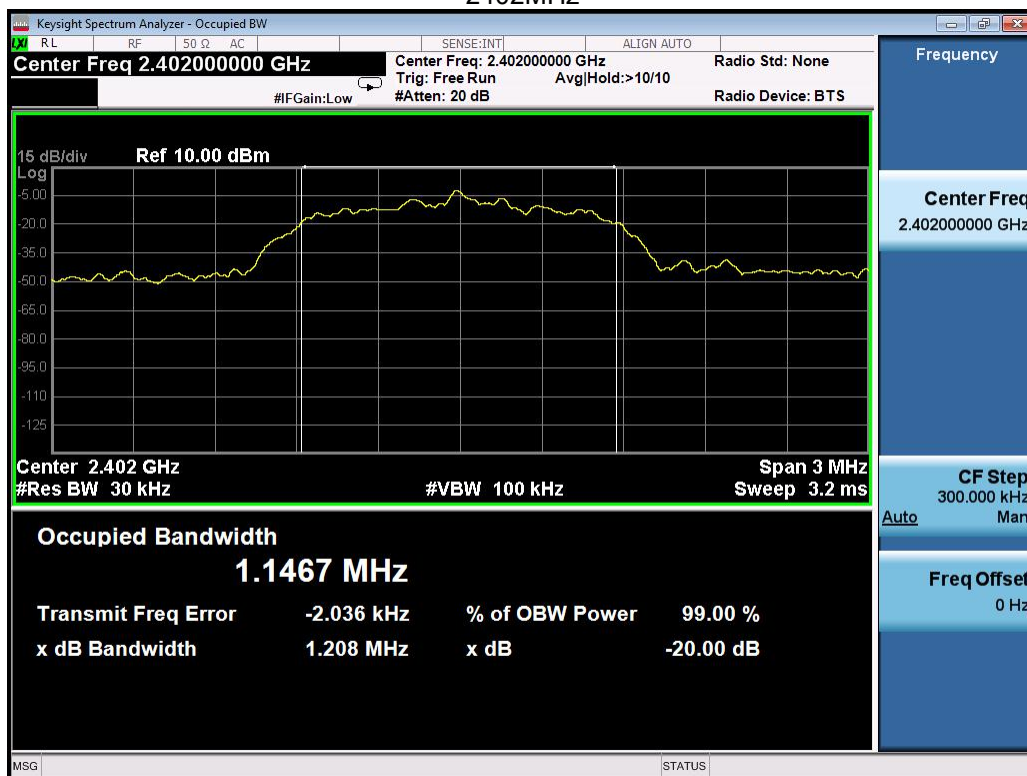




2441MHz

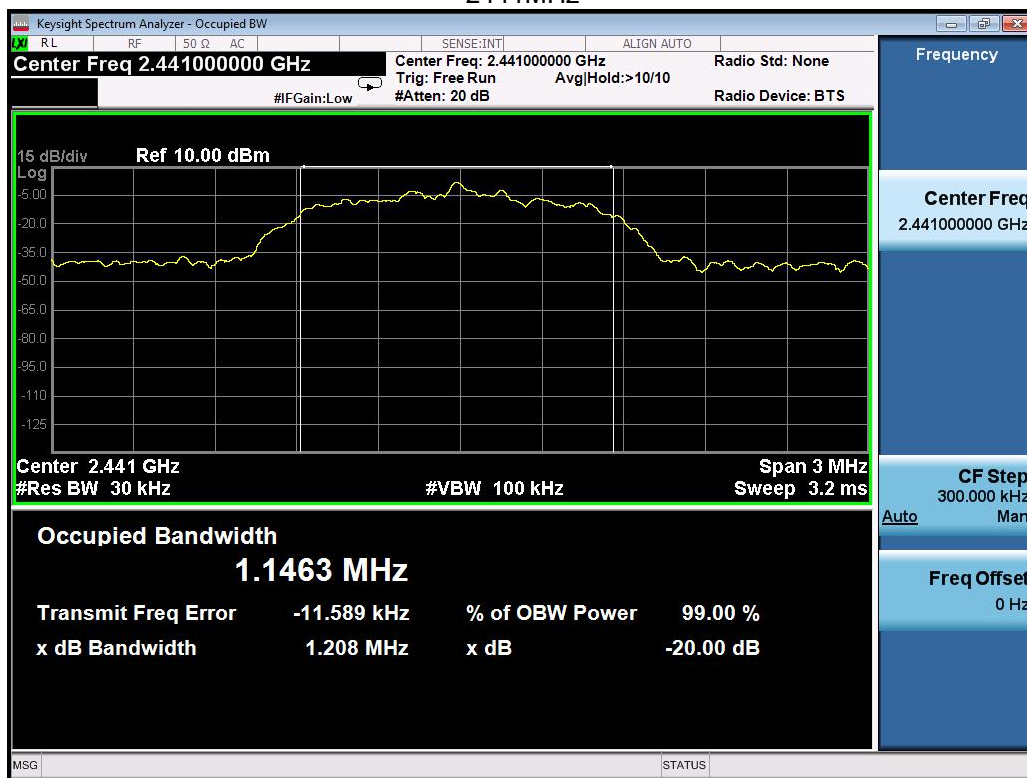

2480MHz

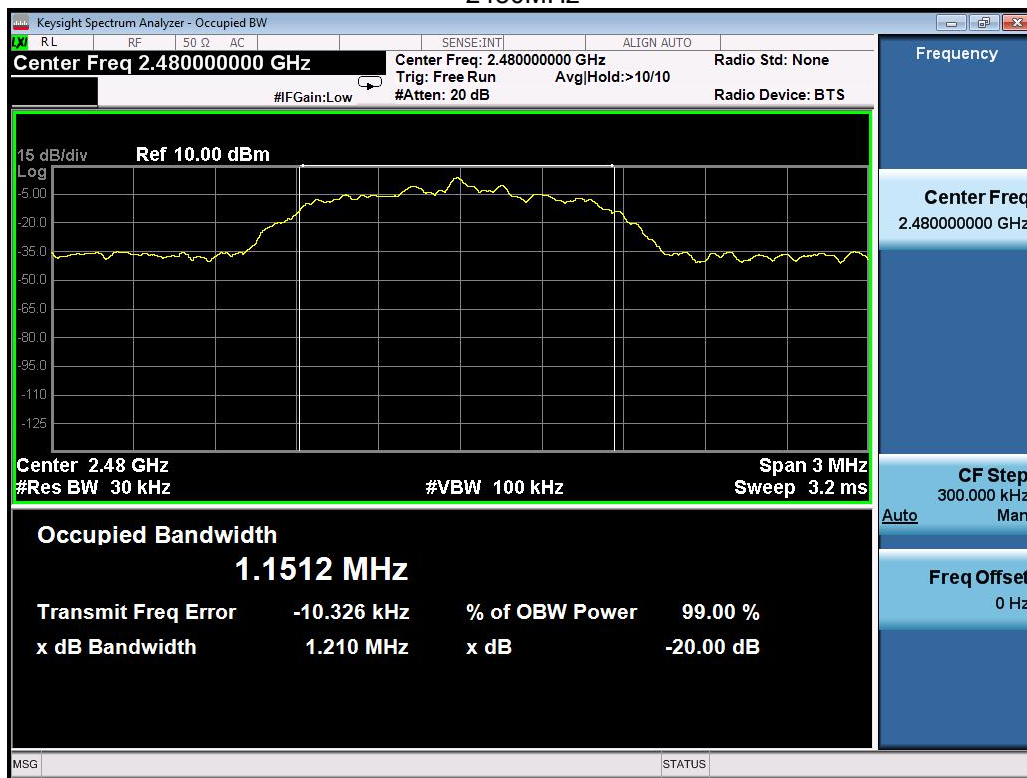


5. ANTENNA REQUIREMENT

5.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.2 EUT ANTENNA


The EUT antenna is PCB antenna,. It comply with the standard requirement.

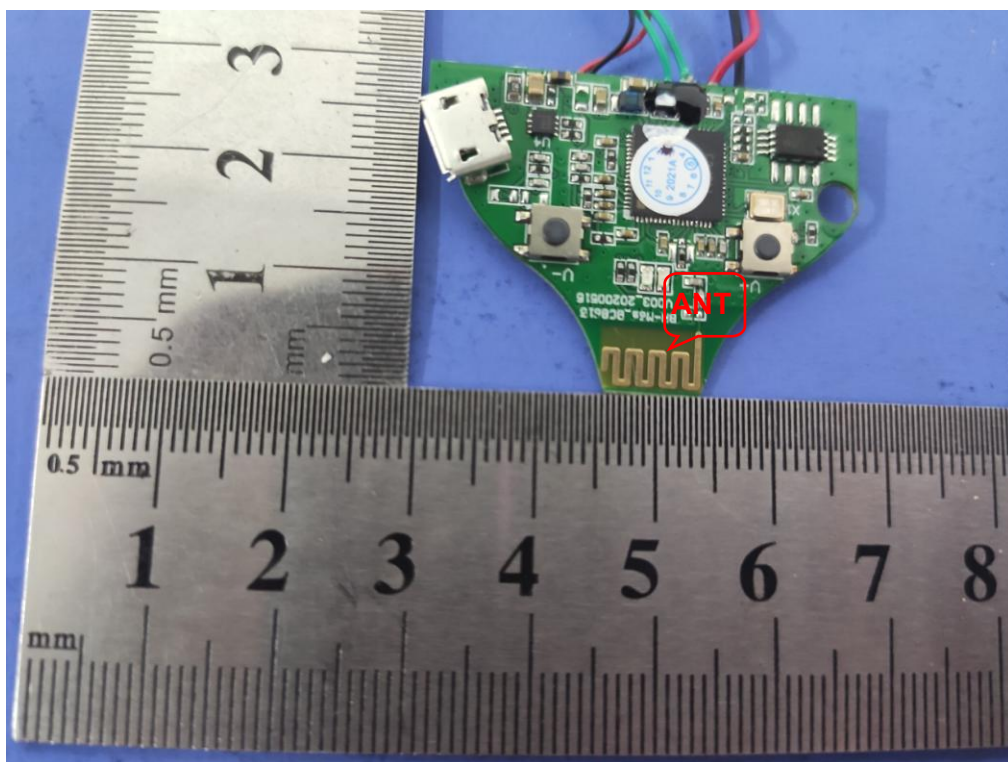



6. TEST SEUUP PHOTO

Radiated Measurement Photos

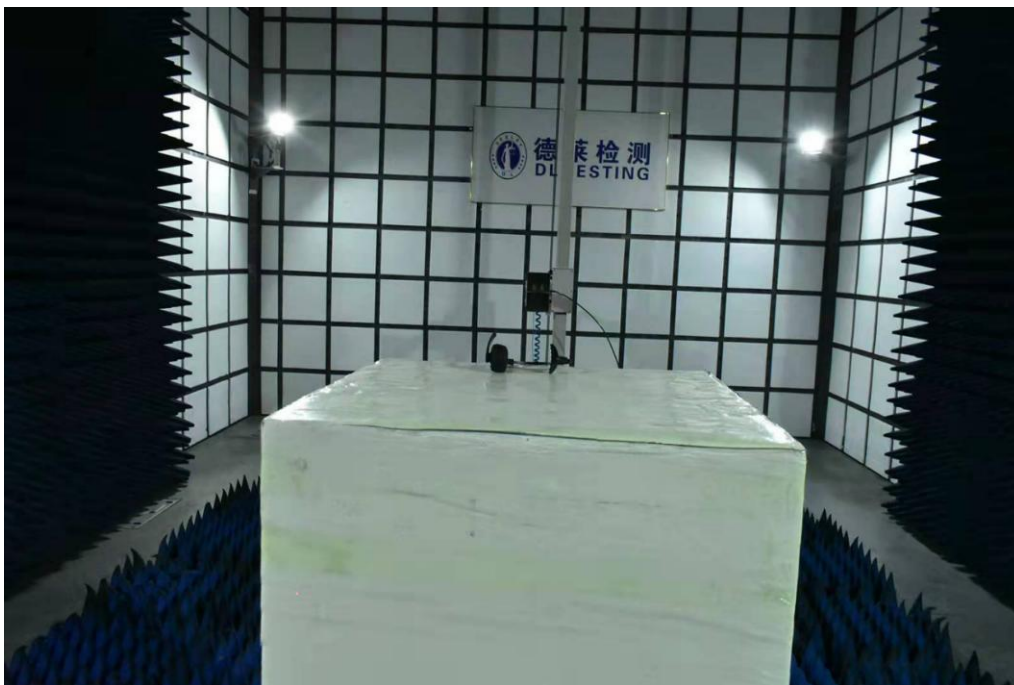



Conducted Measurement Photos



***** END OF REPORT *****