Appendix D

RF Test Data for 5.2GWIFI (Conducted Measurement)

Product Name: Laptop

Test Model: LT-AMD 01

Environmental Conditions

Temperature:	23.8°C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Eason Zhou
Supervised by:	Nick Peng

D.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	20.066	---	Pass
NVNT	a	5200	Ant1	20.218	---	Pass
NVNT	a	5240	Ant1	24.173	---	Pass
NVNT	n20	5180	Ant1	25.206	---	Pass
NVNT	n20	5200	Ant1	23.851	---	Pass
NVNT	n20	5240	Ant1	26.788	---	Pass
NVNT	n40	5190	Ant1	46.411	---	Pass
NVNT	n40	5230	Ant1	51.681	---	Pass
NVNT	ac20	5180	Ant1	25.604	---	Pass
NVNT	ac20	5200	Ant1	25.246	---	Pass
NVNT	ac20	5240	Ant1	28.263	---	Pass
NVNT	ac40	5190	Ant1	43.026	---	Pass
NVNT	ac40	5230	Ant1	41.093	---	Pass
NVNT	ac80	5210	Ant1	80.016	---	Pass

Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1

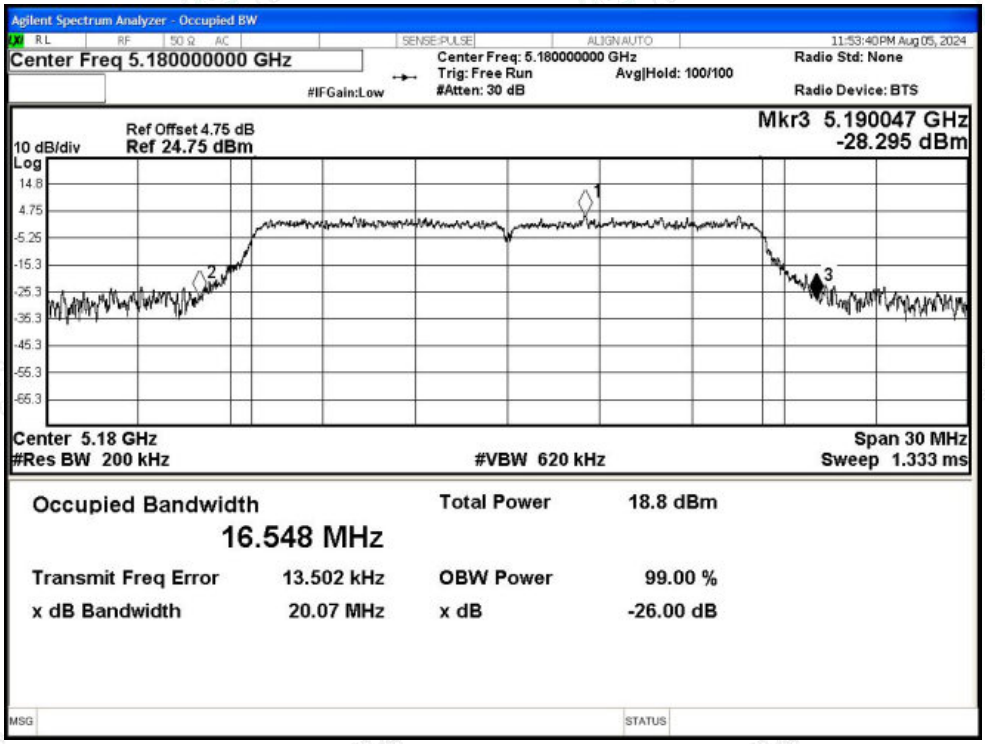

-26dB Bandwidth NVNT a 5200MHz Ant1

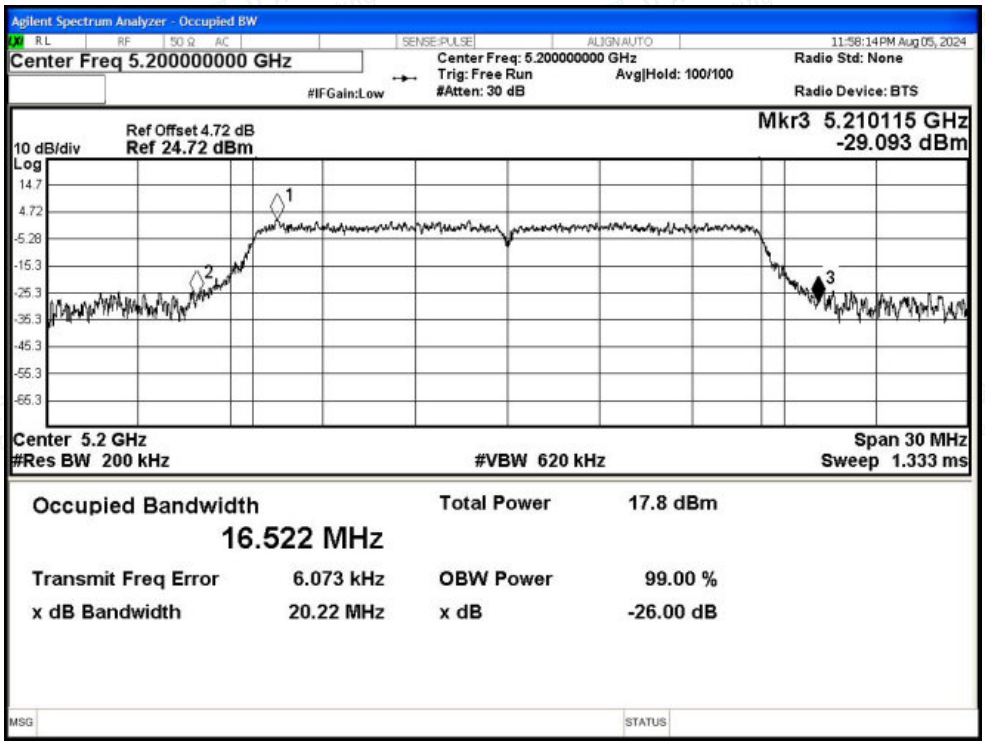

-26dB Bandwidth NVNT a 5240MHz Ant1

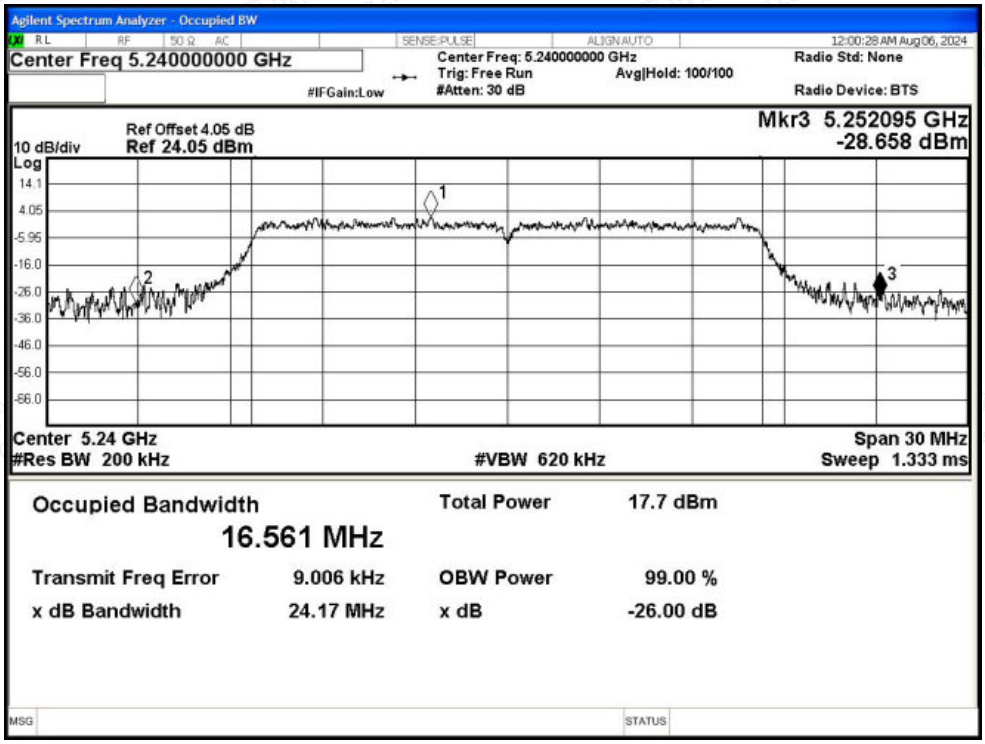

-26dB Bandwidth NVNT n20 5180MHz Ant1

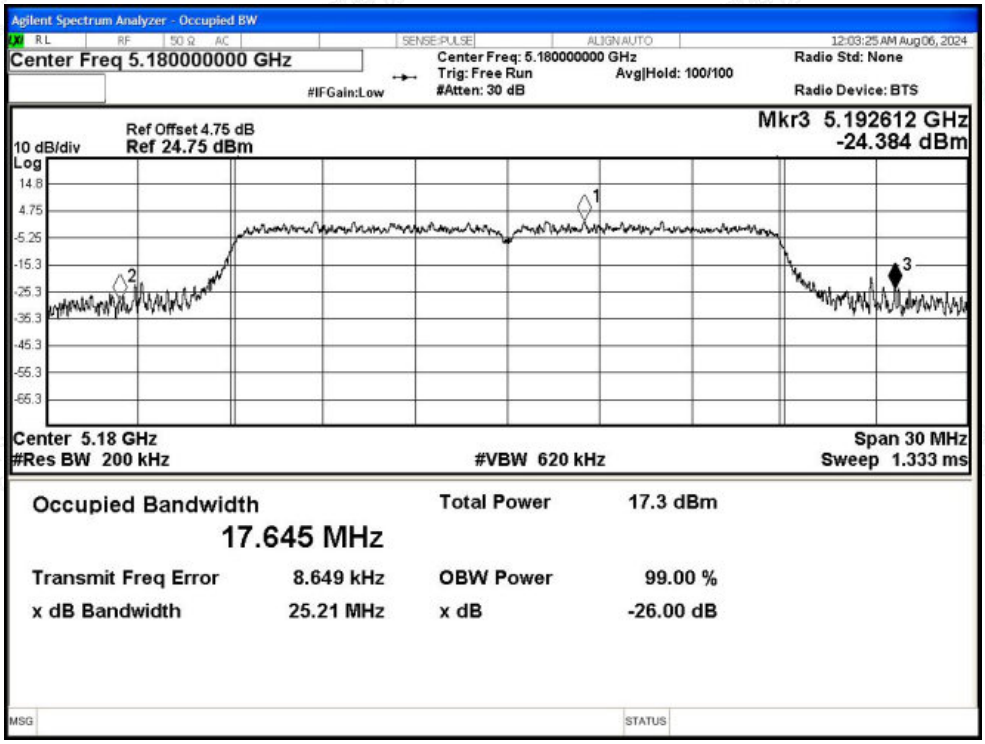

-26dB Bandwidth NVNT n20 5200MHz Ant1

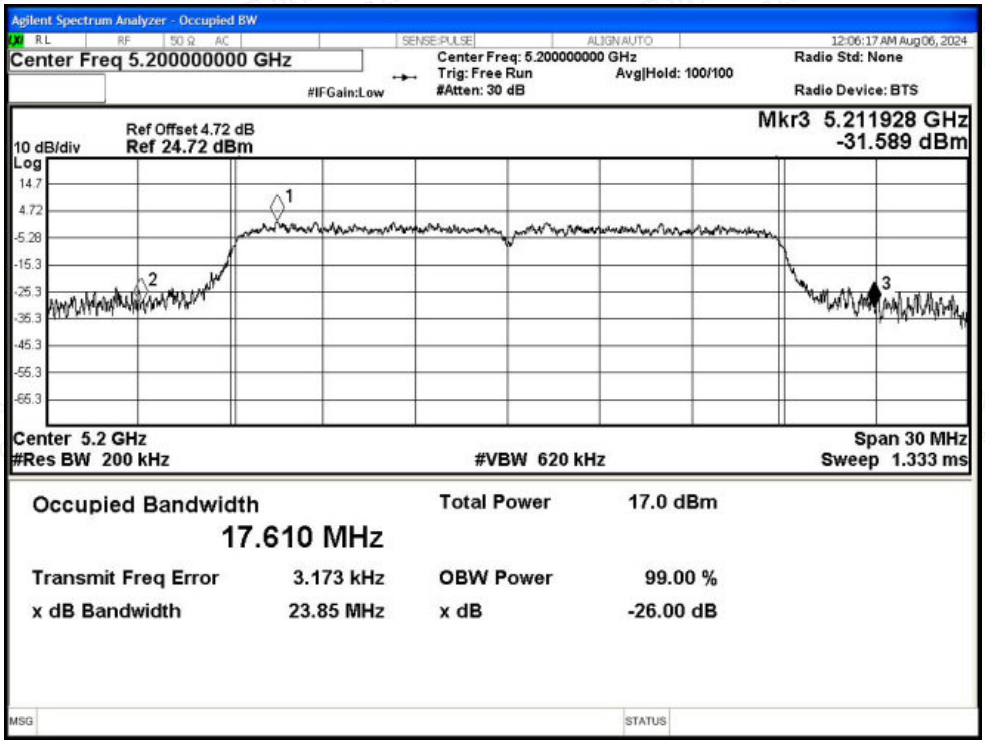

-26dB Bandwidth NVNT n20 5240MHz Ant1

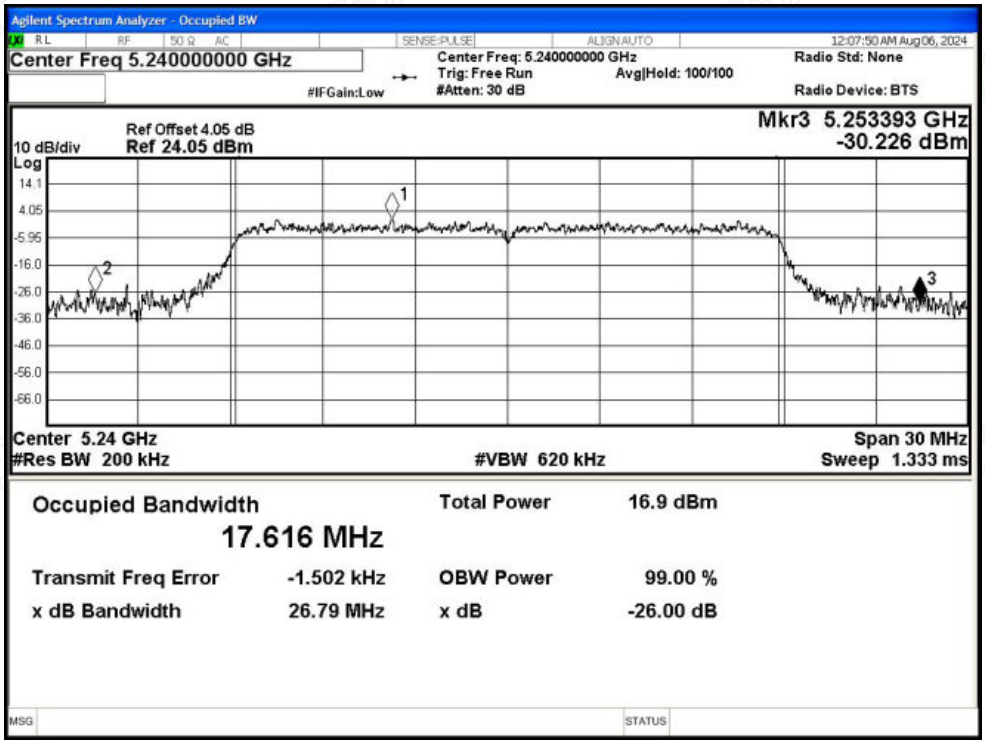

-26dB Bandwidth NVNT n40 5190MHz Ant1

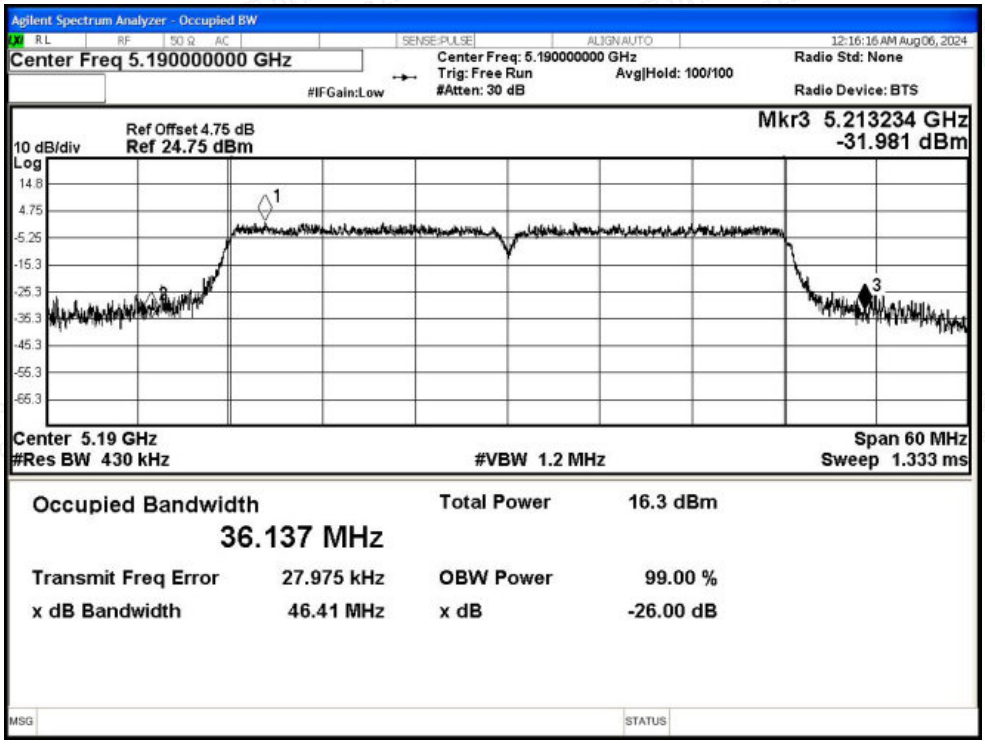

-26dB Bandwidth NVNT n40 5230MHz Ant1

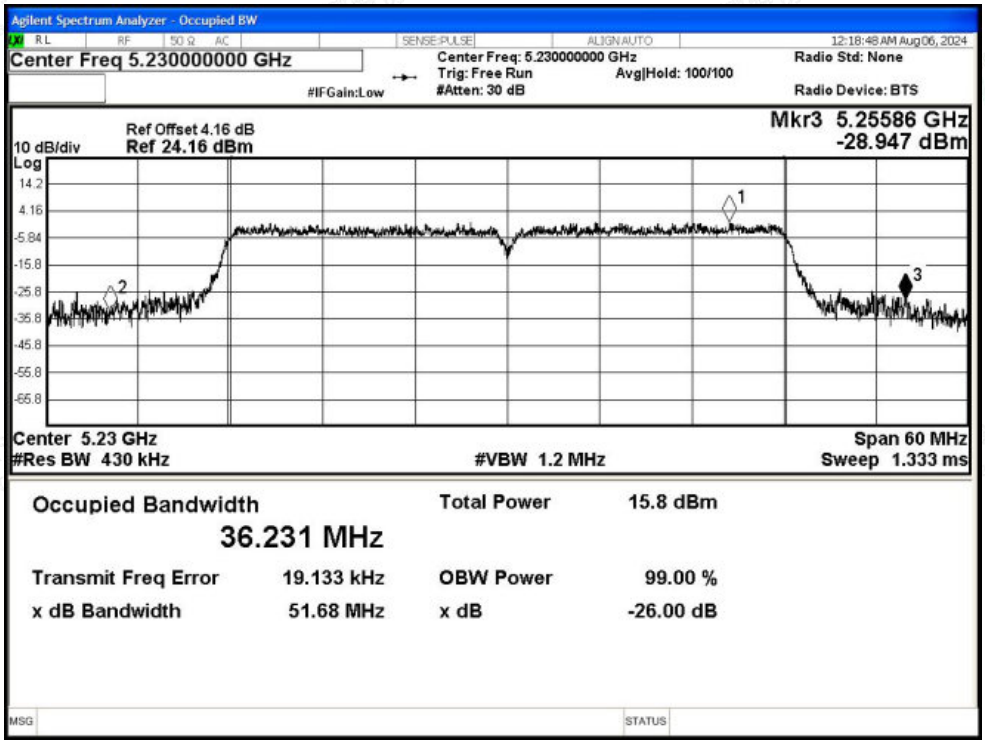

-26dB Bandwidth NVNT ac20 5180MHz Ant1

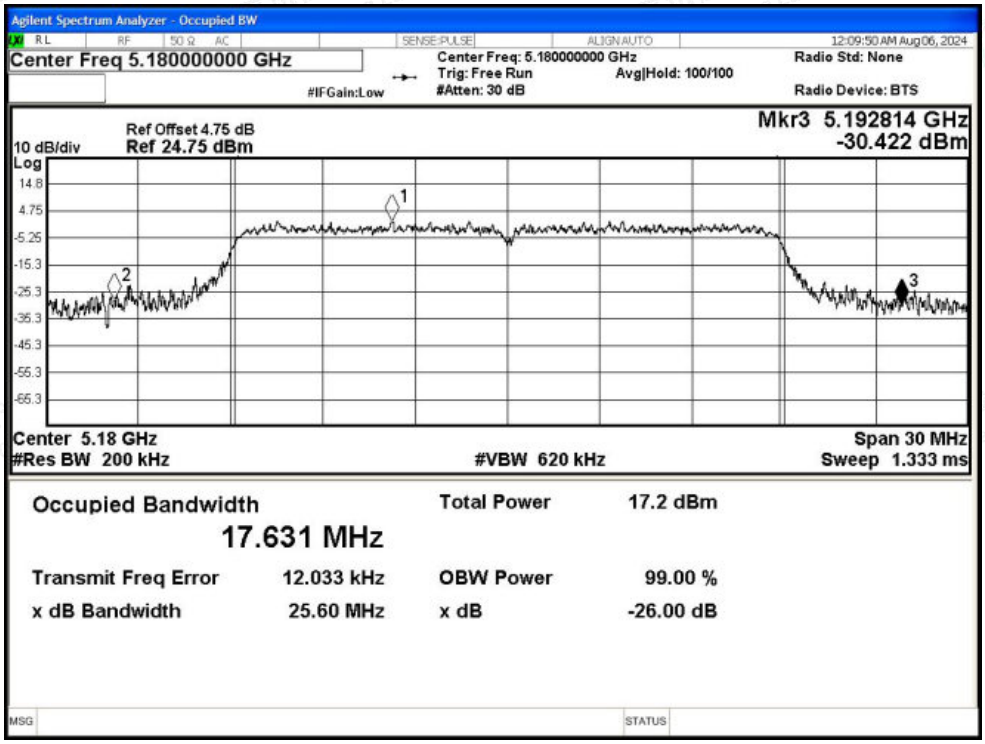

-26dB Bandwidth NVNT ac20 5200MHz Ant1

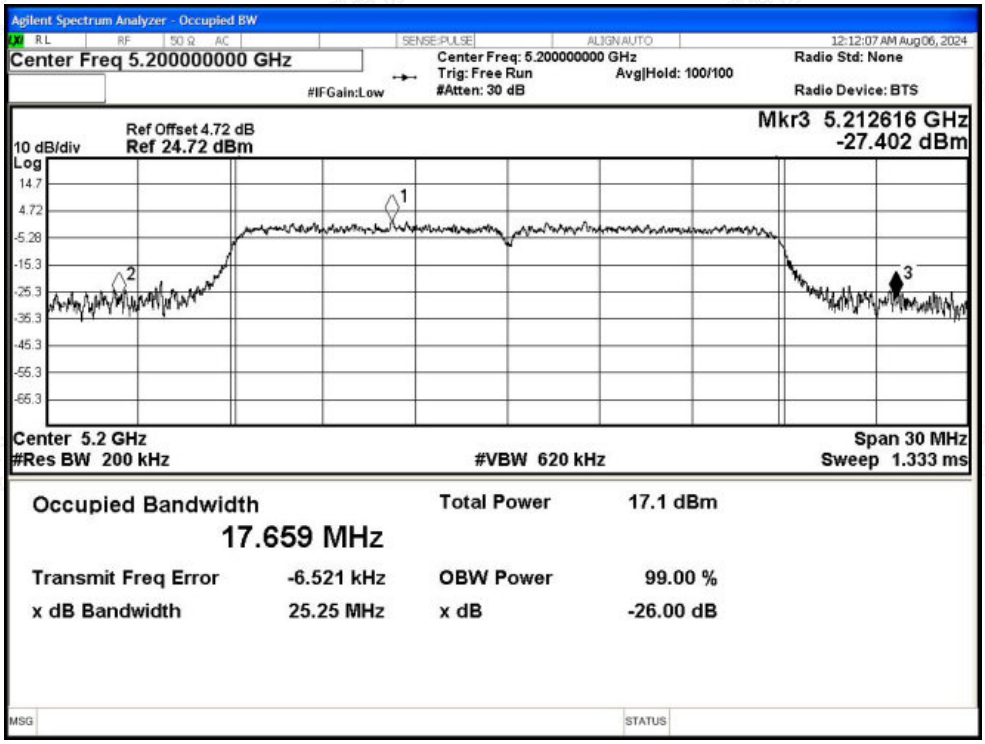

-26dB Bandwidth NVNT ac20 5240MHz Ant1

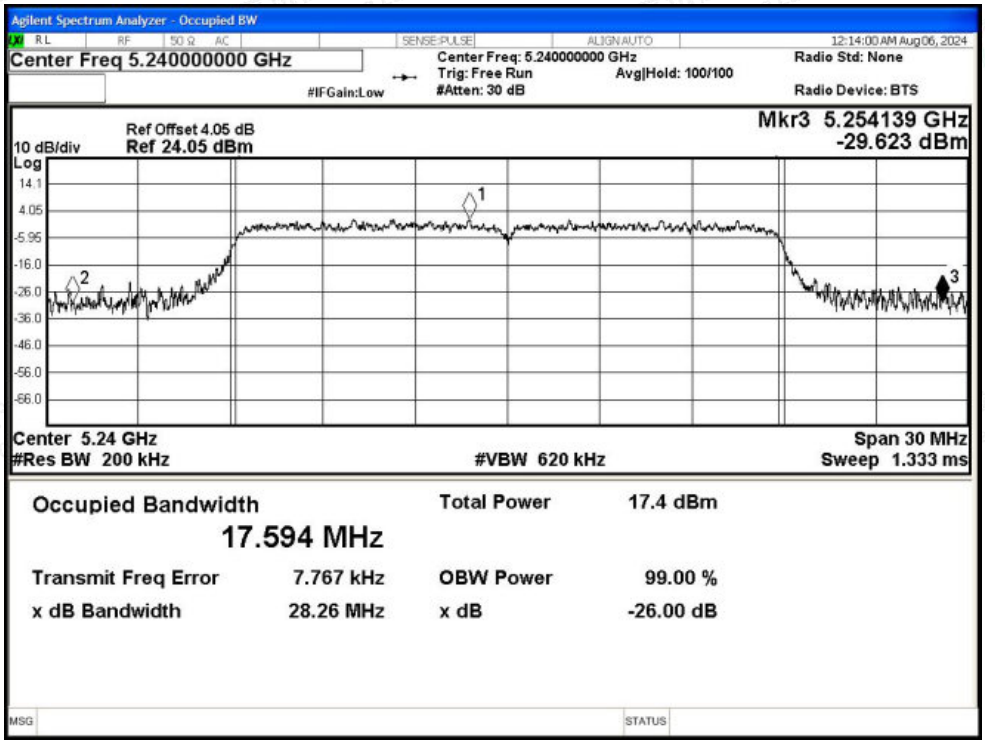

-26dB Bandwidth NVNT ac40 5190MHz Ant1

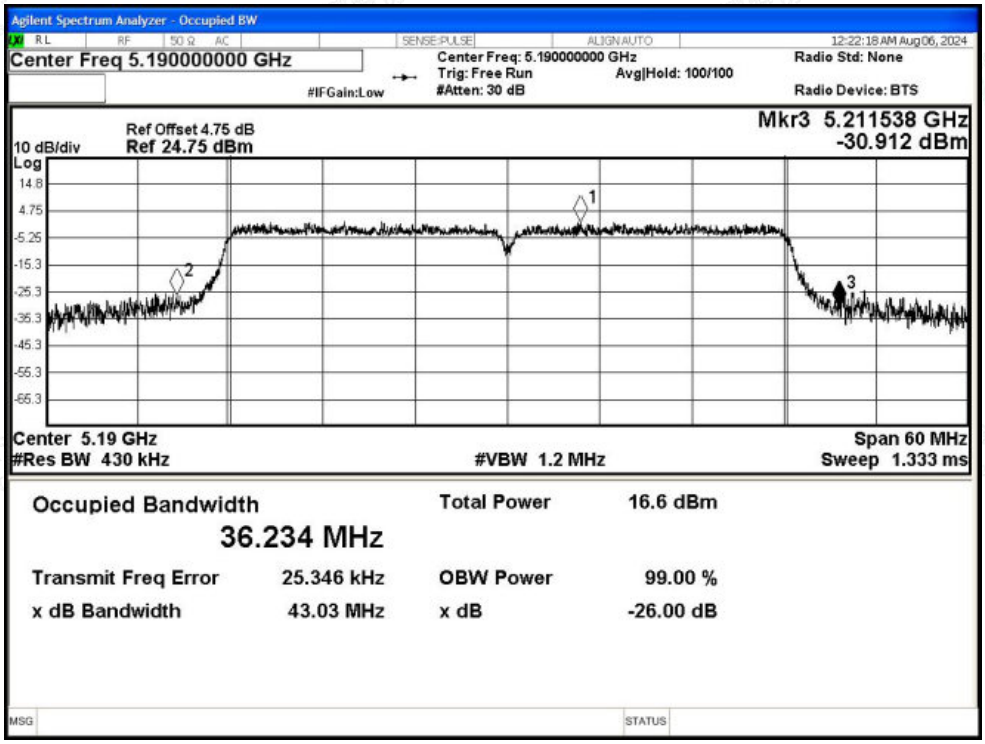

-26dB Bandwidth NVNT ac40 5230MHz Ant1

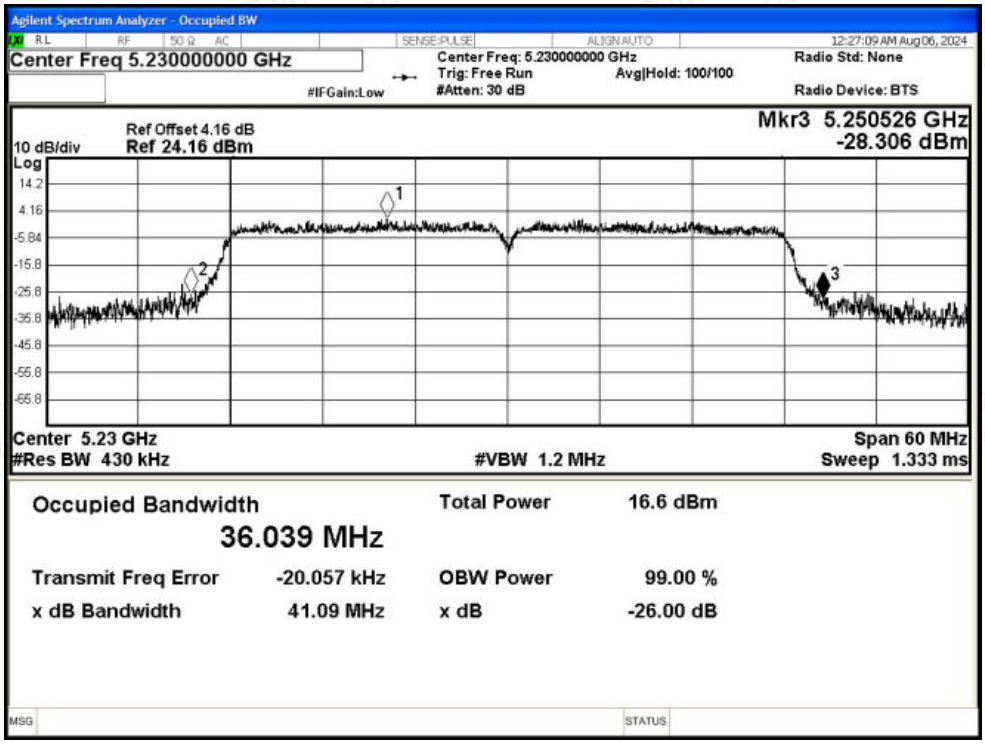

-26dB Bandwidth NVNT ac80 5210MHz Ant1

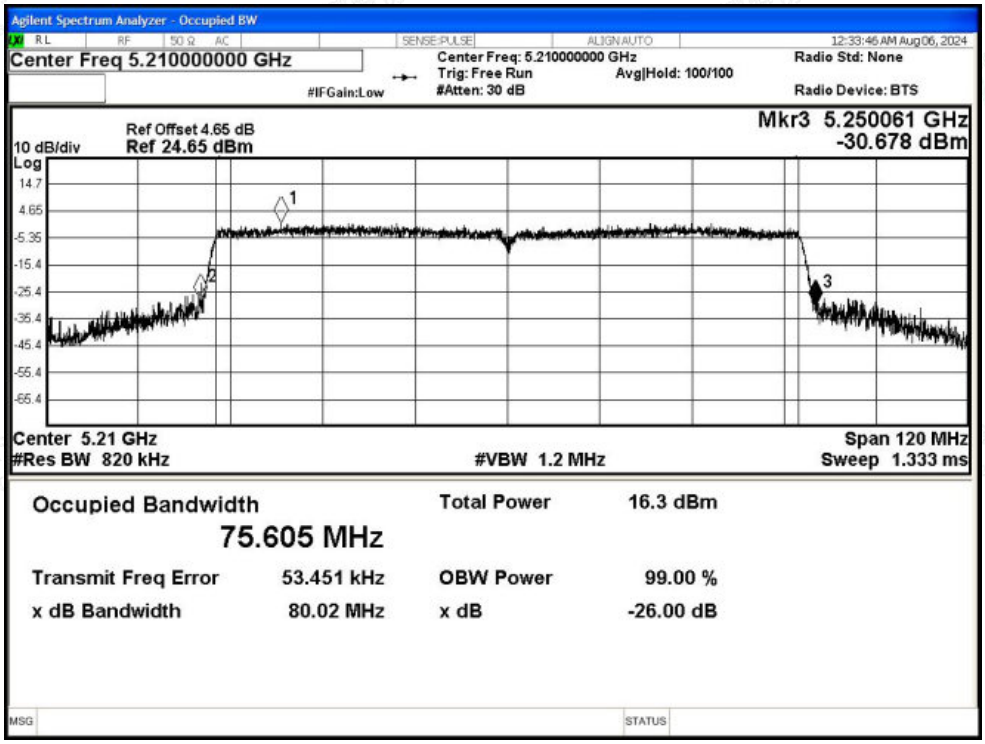

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant2	21.26	>=0.5	Pass
NVNT	a	5200	Ant2	22.86	>=0.5	Pass
NVNT	a	5240	Ant2	22.385	>=0.5	Pass
NVNT	n20	5180	Ant2	26.5	>=0.5	Pass
NVNT	n20	5200	Ant2	26.447	>=0.5	Pass
NVNT	n20	5240	Ant2	28.691	>=0.5	Pass
NVNT	n40	5190	Ant2	47.294	>=0.5	Pass
NVNT	n40	5230	Ant2	43.014	>=0.5	Pass
NVNT	ac20	5180	Ant2	26.188	>=0.5	Pass
NVNT	ac20	5200	Ant2	27.353	>=0.5	Pass
NVNT	ac20	5240	Ant2	29.154	>=0.5	Pass
NVNT	ac40	5190	Ant2	42.544	>=0.5	Pass
NVNT	ac40	5230	Ant2	46.332	>=0.5	Pass
NVNT	ac80	5210	Ant2	79.516	>=0.5	Pass

Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant2

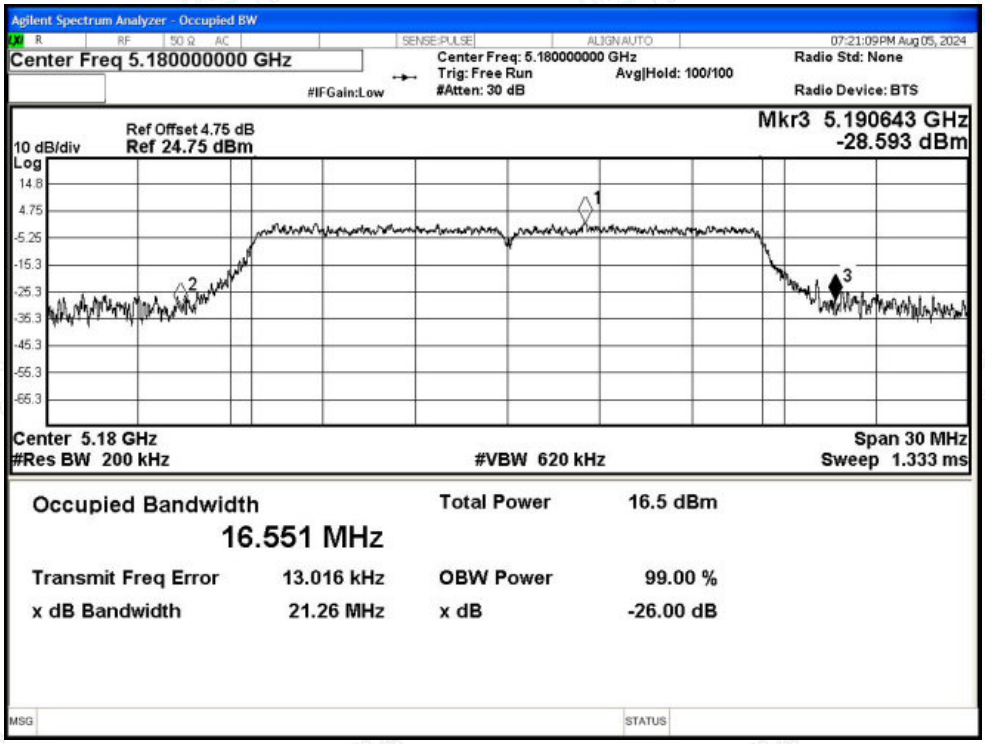

-26dB Bandwidth NVNT a 5200MHz Ant2

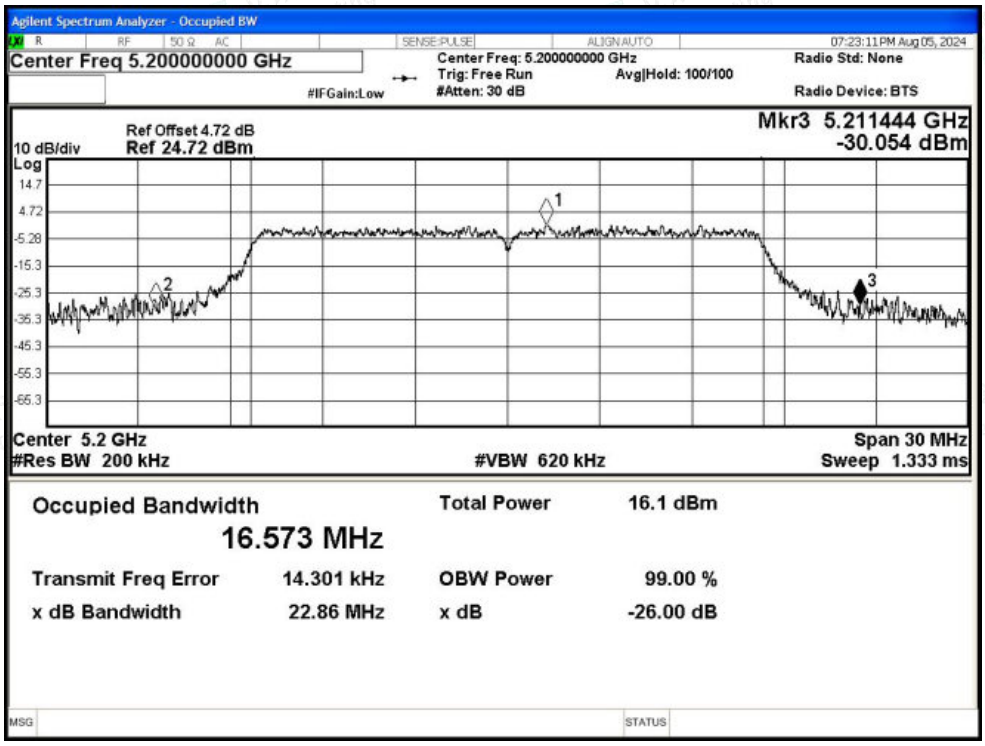

-26dB Bandwidth NVNT a 5240MHz Ant2

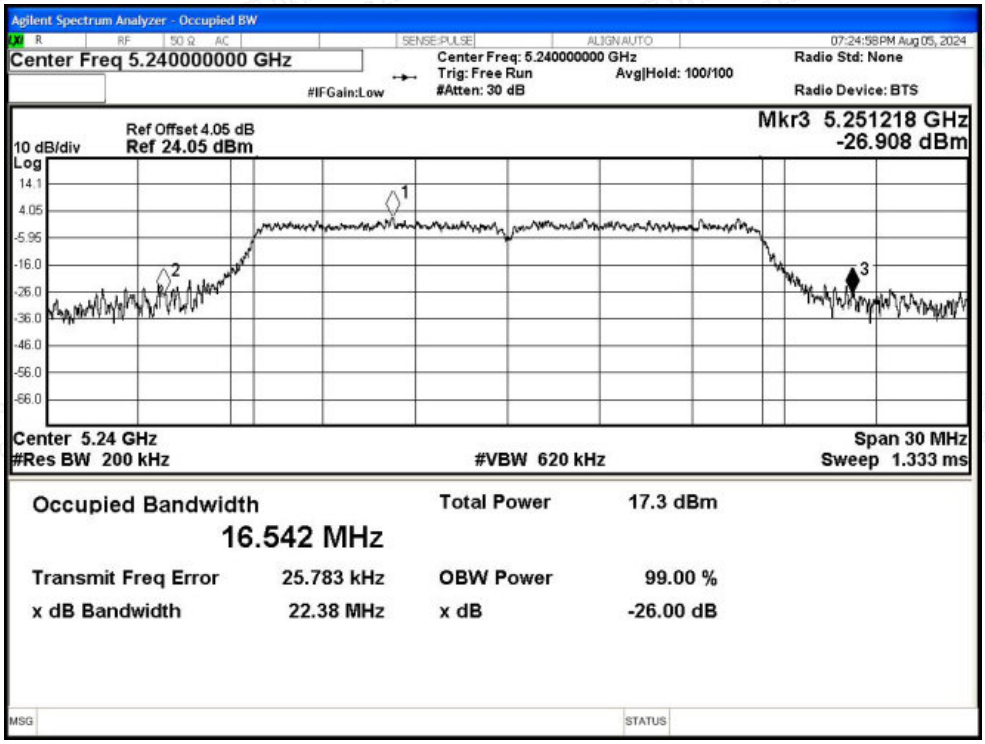

-26dB Bandwidth NVNT n20 5180MHz Ant2

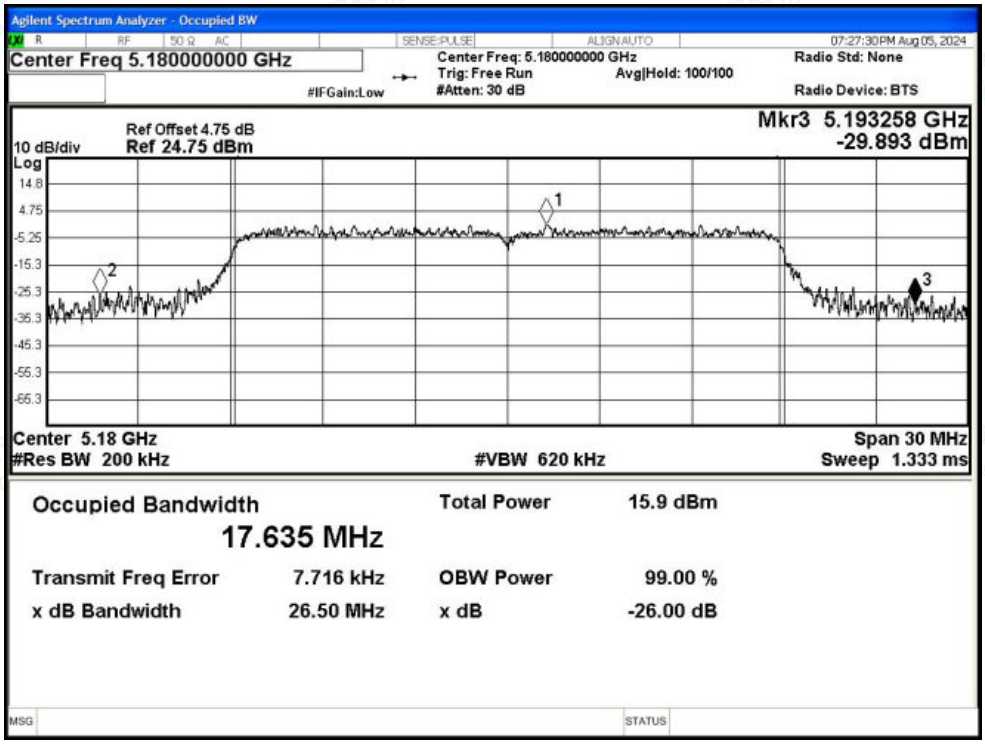

-26dB Bandwidth NVNT n20 5200MHz Ant2

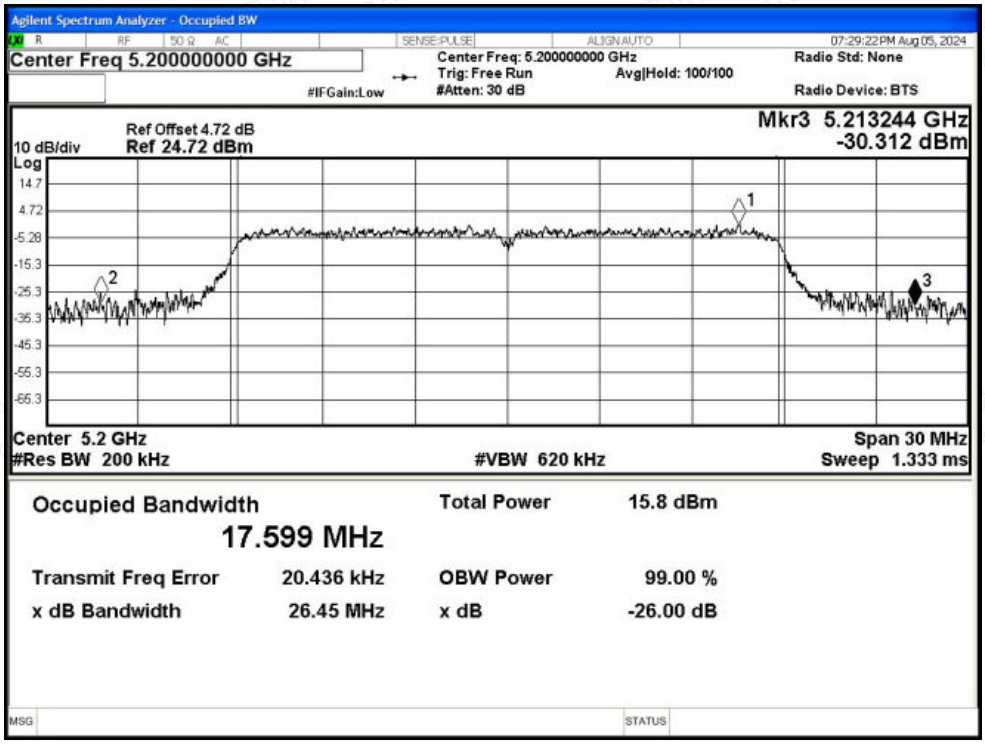

-26dB Bandwidth NVNT n20 5240MHz Ant2

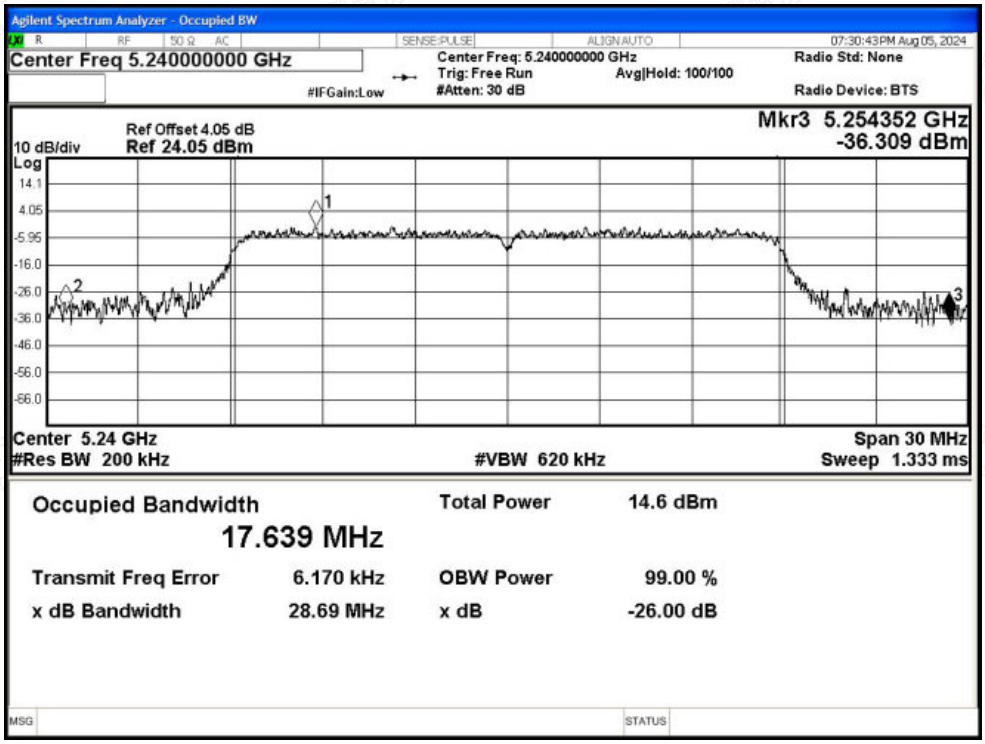

-26dB Bandwidth NVNT n40 5190MHz Ant2

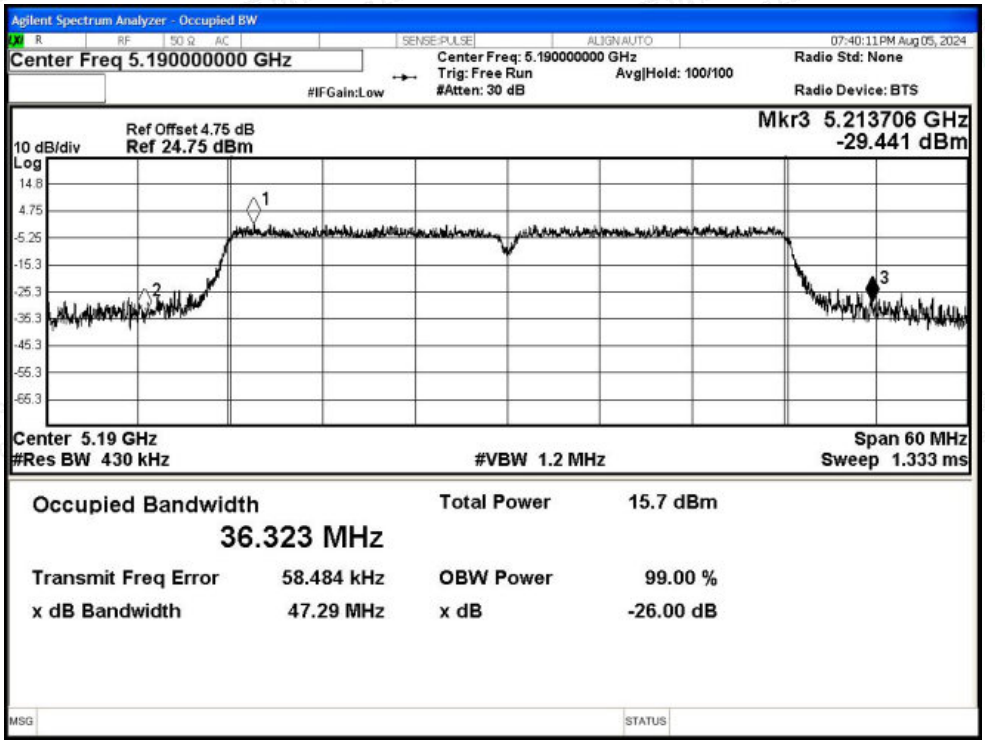

-26dB Bandwidth NVNT n40 5230MHz Ant2

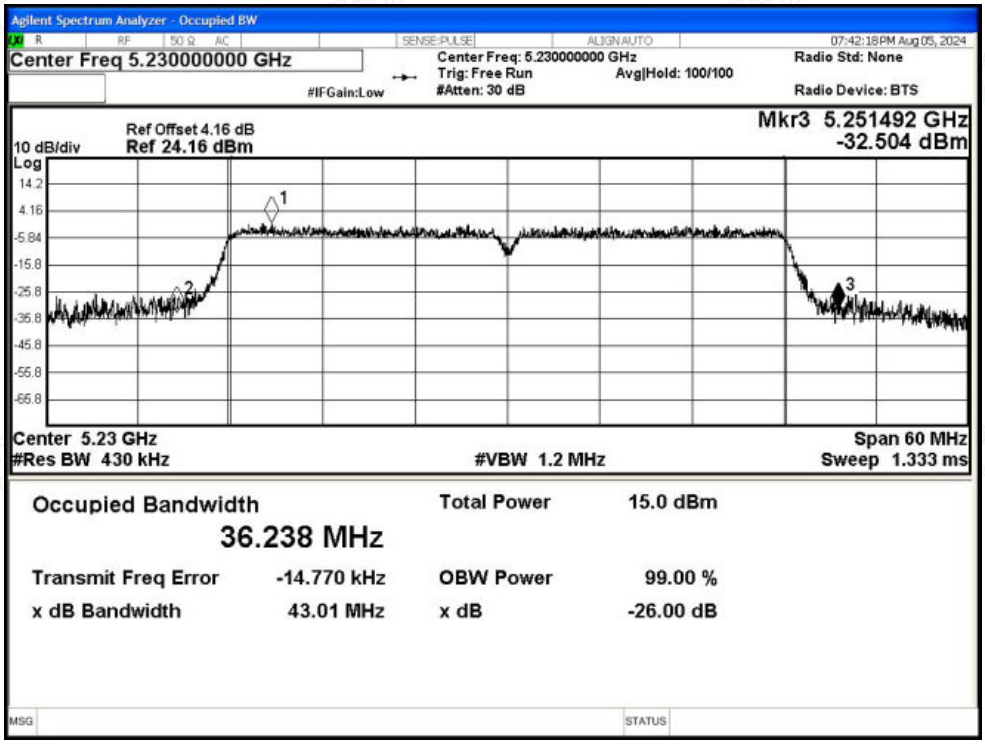

-26dB Bandwidth NVNT ac20 5180MHz Ant2

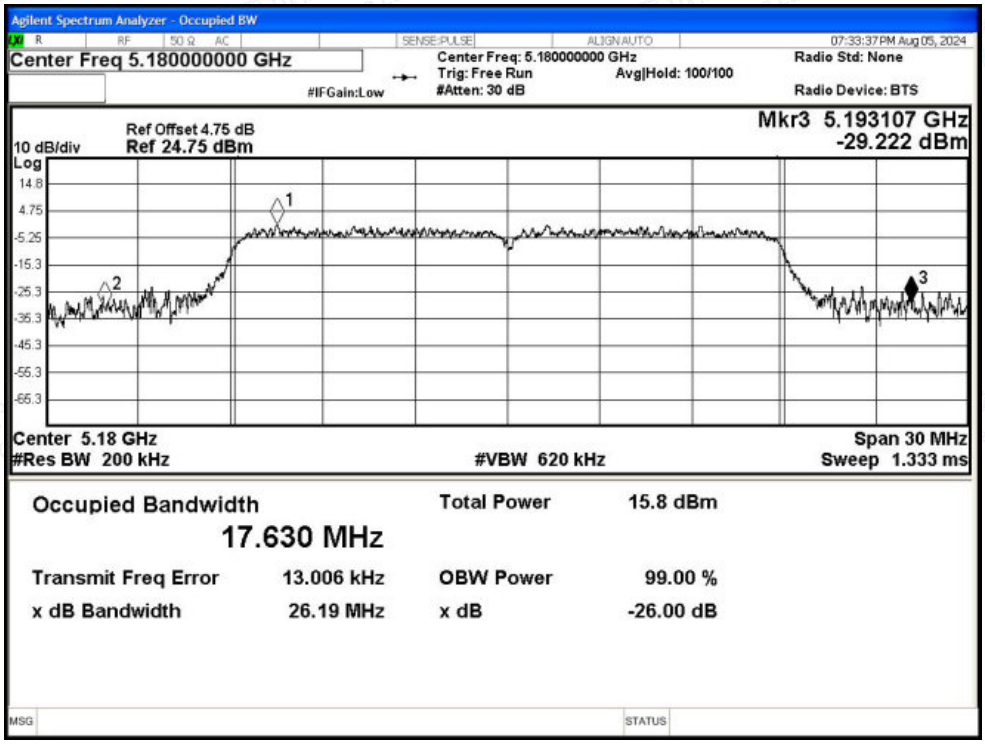

-26dB Bandwidth NVNT ac20 5200MHz Ant2

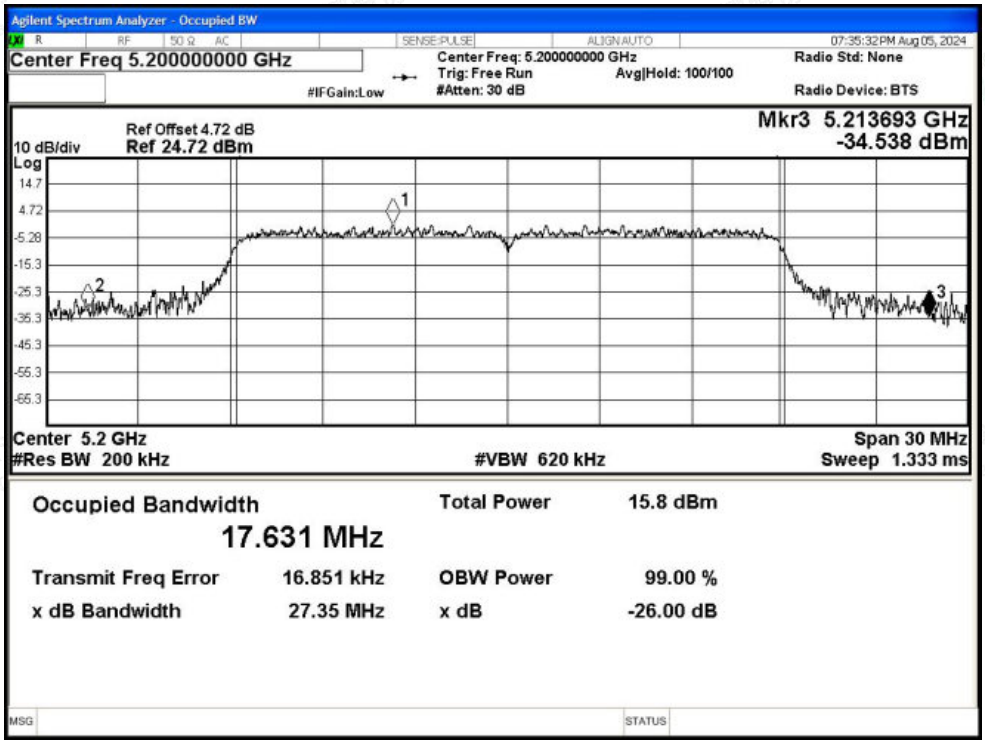

-26dB Bandwidth NVNT ac20 5240MHz Ant2

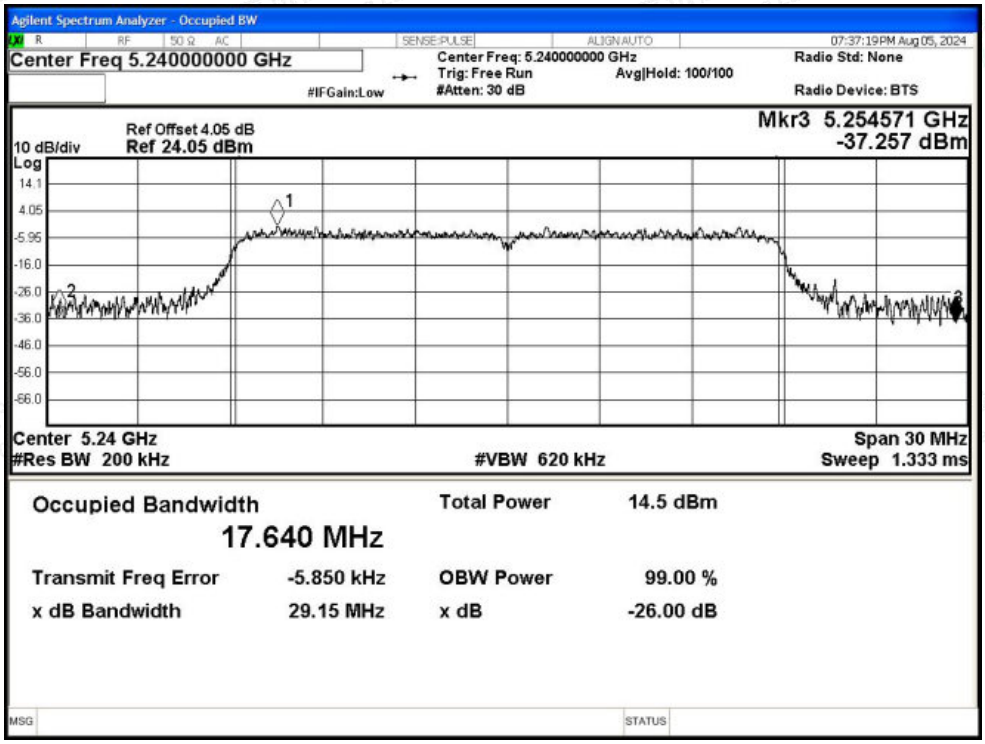

-26dB Bandwidth NVNT ac40 5190MHz Ant2

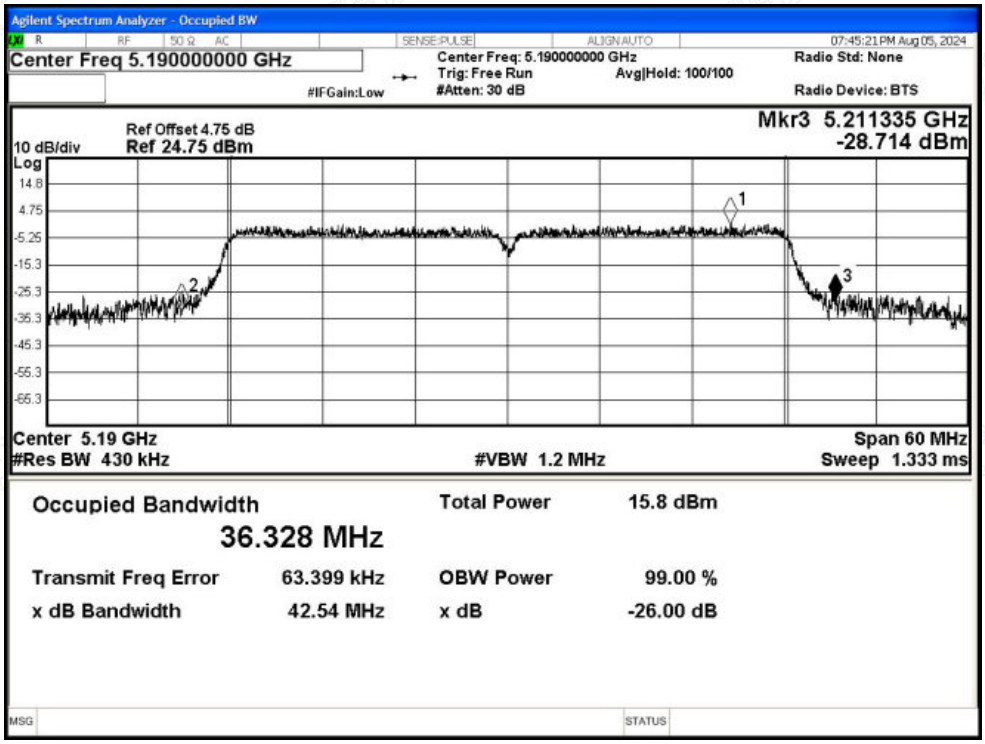

-26dB Bandwidth NVNT ac40 5230MHz Ant2

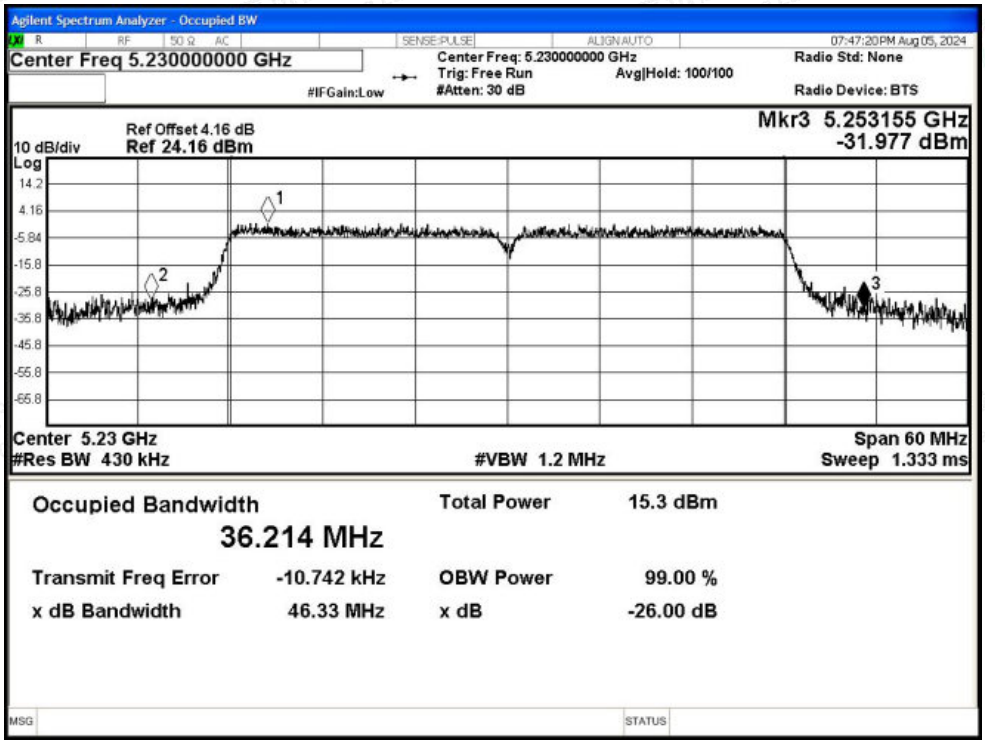

-26dB Bandwidth NVNT ac80 5210MHz Ant2

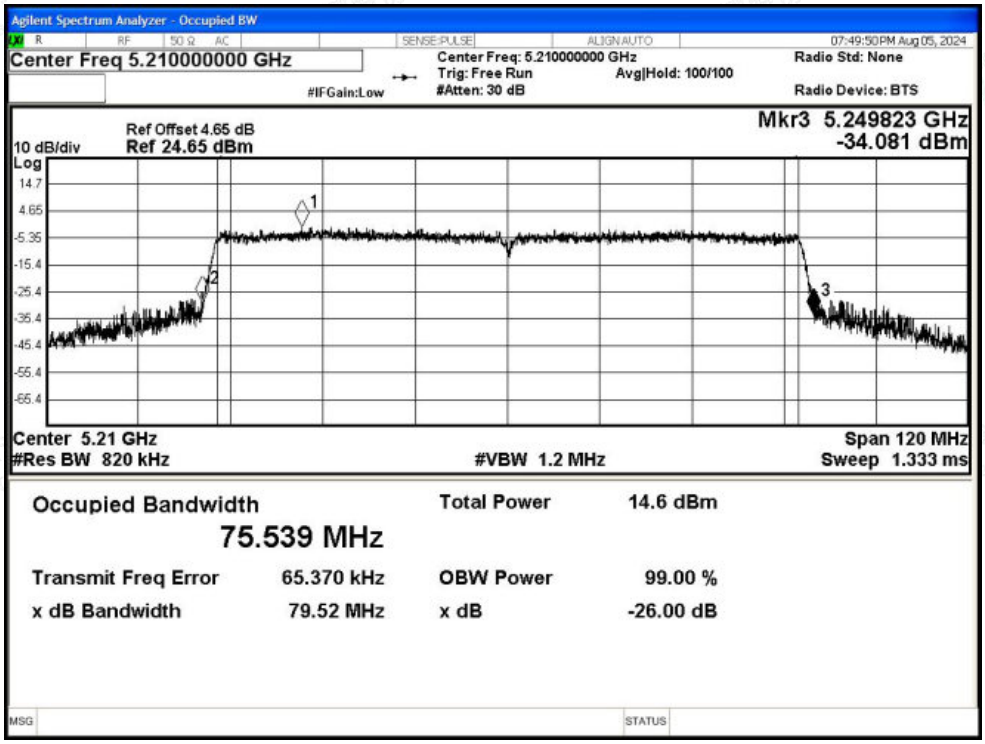

D.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	13.06	0.24	13.3	24	Pass
NVNT	a	5200	Ant1	12.06	0.24	12.3	24	Pass
NVNT	a	5240	Ant1	12.84	0.24	13.08	24	Pass
NVNT	n20	5180	Ant1	11.42	0.28	11.7	24	Pass
NVNT	n20	5200	Ant1	11.21	0.28	11.49	24	Pass
NVNT	n20	5240	Ant1	11.06	0.28	11.34	24	Pass
NVNT	n40	5190	Ant1	10.46	0.12	10.58	24	Pass
NVNT	n40	5230	Ant1	10.83	0.12	10.95	24	Pass
NVNT	ac20	5180	Ant1	11.49	0.28	11.77	24	Pass
NVNT	ac20	5200	Ant1	11.34	0.28	11.62	24	Pass
NVNT	ac20	5240	Ant1	11.59	0.28	11.87	24	Pass
NVNT	ac40	5190	Ant1	10.8	0.12	10.92	24	Pass
NVNT	ac40	5230	Ant1	10.72	0.12	10.84	24	Pass
NVNT	ac80	5210	Ant1	9.95	0.25	10.2	24	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant2	11.39	0.24	11.63	24	Pass
NVNT	a	5200	Ant2	11.26	0.24	11.5	24	Pass
NVNT	a	5240	Ant2	11.54	0.24	11.78	24	Pass
NVNT	n20	5180	Ant2	10.06	0.28	10.34	24	Pass
NVNT	n20	5200	Ant2	10.03	0.28	10.31	24	Pass
NVNT	n20	5240	Ant2	10.82	0.28	11.1	24	Pass
NVNT	n40	5190	Ant2	9.62	0.44	10.06	24	Pass
NVNT	n40	5230	Ant2	9.64	0.45	10.09	24	Pass
NVNT	ac20	5180	Ant2	10	0.28	10.28	24	Pass
NVNT	ac20	5200	Ant2	10.87	0.28	11.15	24	Pass
NVNT	ac20	5240	Ant2	10.04	0.28	10.32	24	Pass
NVNT	ac40	5190	Ant2	9.67	0.45	10.12	24	Pass
NVNT	ac40	5230	Ant2	8.94	0.44	9.38	24	Pass
NVNT	ac80	5210	Ant2	8.21	0.62	8.83	24	Pass

MIMO

Condition	Mode	Frequency (MHz)	Total Power (dBm)			Limit (dBm)	Verdict
			Ant1	Ant2	Ant1+Ant2		
NVNT	n20	5180	11.7	10.34	14.08	24	Pass
NVNT	n20	5200	11.49	10.31	13.95	24	Pass
NVNT	n20	5240	11.34	11.1	14.23	24	Pass
NVNT	n40	5190	10.58	10.06	13.34	24	Pass
NVNT	n40	5230	10.95	10.09	13.55	24	Pass
NVNT	ac20	5180	11.77	10.28	14.10	24	Pass
NVNT	ac20	5200	11.62	11.15	14.40	24	Pass
NVNT	ac20	5240	11.87	10.32	14.17	24	Pass
NVNT	ac40	5190	10.92	10.12	13.55	24	Pass
NVNT	ac40	5230	10.84	9.38	13.18	24	Pass
NVNT	ac80	5210	10.2	8.83	12.58	24	Pass

D.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant1	2.64	0.24	2.88	11	Pass
NVNT	a	5200	Ant1	1.62	0.24	1.86	11	Pass
NVNT	a	5240	Ant1	2.5	0.24	2.74	11	Pass
NVNT	n20	5180	Ant1	0.61	0.28	0.89	11	Pass
NVNT	n20	5200	Ant1	0.49	0.28	0.77	11	Pass
NVNT	n20	5240	Ant1	0.33	0.28	0.61	11	Pass
NVNT	n40	5190	Ant1	-3.2	0.12	-3.08	11	Pass
NVNT	n40	5230	Ant1	-2.72	0.12	-2.6	11	Pass
NVNT	ac20	5180	Ant1	0.61	0.28	0.89	11	Pass
NVNT	ac20	5200	Ant1	0.61	0.28	0.89	11	Pass
NVNT	ac20	5240	Ant1	0.91	0.28	1.19	11	Pass
NVNT	ac40	5190	Ant1	-2.7	0.12	-2.58	11	Pass
NVNT	ac40	5230	Ant1	-2.86	0.12	-2.74	11	Pass
NVNT	ac80	5210	Ant1	-6.25	0.25	-6	11	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant2	0.78	0.24	1.02	11	Pass
NVNT	a	5200	Ant2	-0.38	0.24	-0.14	11	Pass
NVNT	a	5240	Ant2	1.09	0.24	1.33	11	Pass
NVNT	n20	5180	Ant2	-0.56	0.28	-0.28	11	Pass
NVNT	n20	5200	Ant2	-0.42	0.28	-0.14	11	Pass
NVNT	n20	5240	Ant2	-1.6	0.28	-1.32	11	Pass
NVNT	n40	5190	Ant2	-4.02	0.44	-3.58	11	Pass
NVNT	n40	5230	Ant2	-4.54	0.45	-4.09	11	Pass
NVNT	ac20	5180	Ant2	-0.76	0.28	-0.48	11	Pass
NVNT	ac20	5200	Ant2	-1.02	0.28	-0.74	11	Pass
NVNT	ac20	5240	Ant2	-2.09	0.28	-1.81	11	Pass
NVNT	ac40	5190	Ant2	-4.05	0.45	-3.6	11	Pass
NVNT	ac40	5230	Ant2	-4.62	0.44	-4.18	11	Pass
NVNT	ac80	5210	Ant2	-8.66	0.62	-8.04	11	Pass

MIMO

Condition	Mode	Frequency (MHz)	Total PSD (dBm/MHz)			Limit (dBm/MHz)	Verdict
			Ant1	Ant2	Ant1+Ant2		
NVNT	n20	5180	0.89	-0.28	3.35	11	Pass
NVNT	n20	5200	0.77	-0.14	3.35	11	Pass
NVNT	n20	5240	0.61	-1.32	2.76	11	Pass
NVNT	n40	5190	-3.08	-3.58	-0.31	11	Pass
NVNT	n40	5230	-2.6	-4.09	-0.27	11	Pass
NVNT	ac20	5180	0.89	-0.48	3.27	11	Pass
NVNT	ac20	5200	0.89	-0.74	3.16	11	Pass
NVNT	ac20	5240	1.19	-1.81	2.95	11	Pass
NVNT	ac40	5190	-2.58	-3.6	-0.05	11	Pass
NVNT	ac40	5230	-2.74	-4.18	-0.39	11	Pass
NVNT	ac80	5210	-6	-8.04	-3.89	11	Pass

Test Graphs

PSD NVNT a 5180MHz Ant1

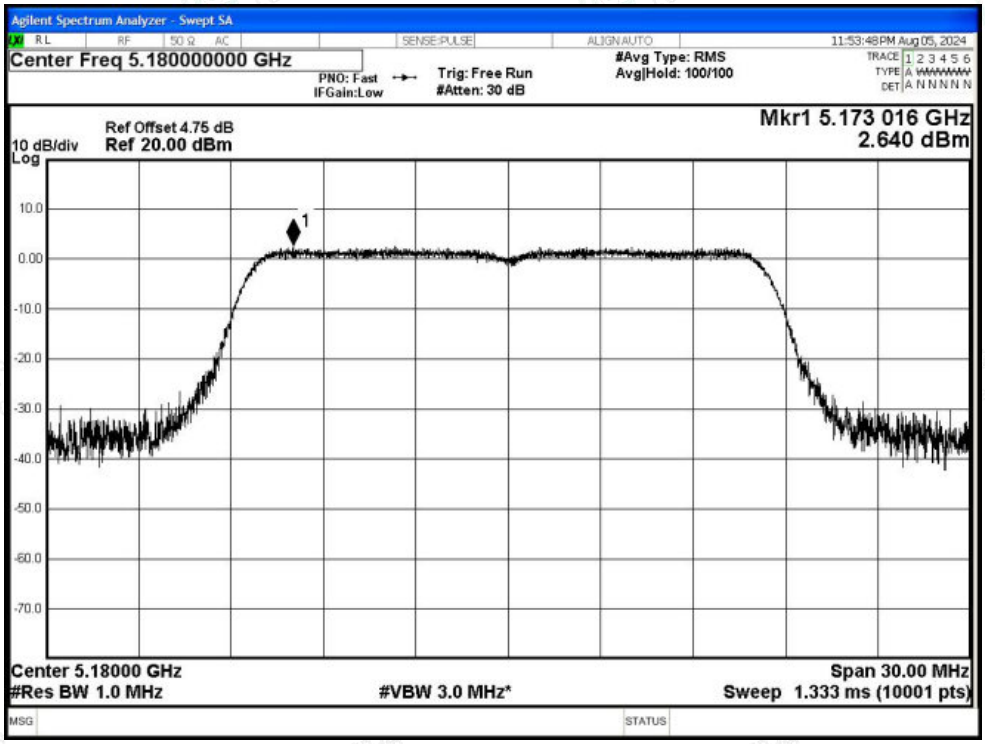

PSD NVNT a 5200MHz Ant1

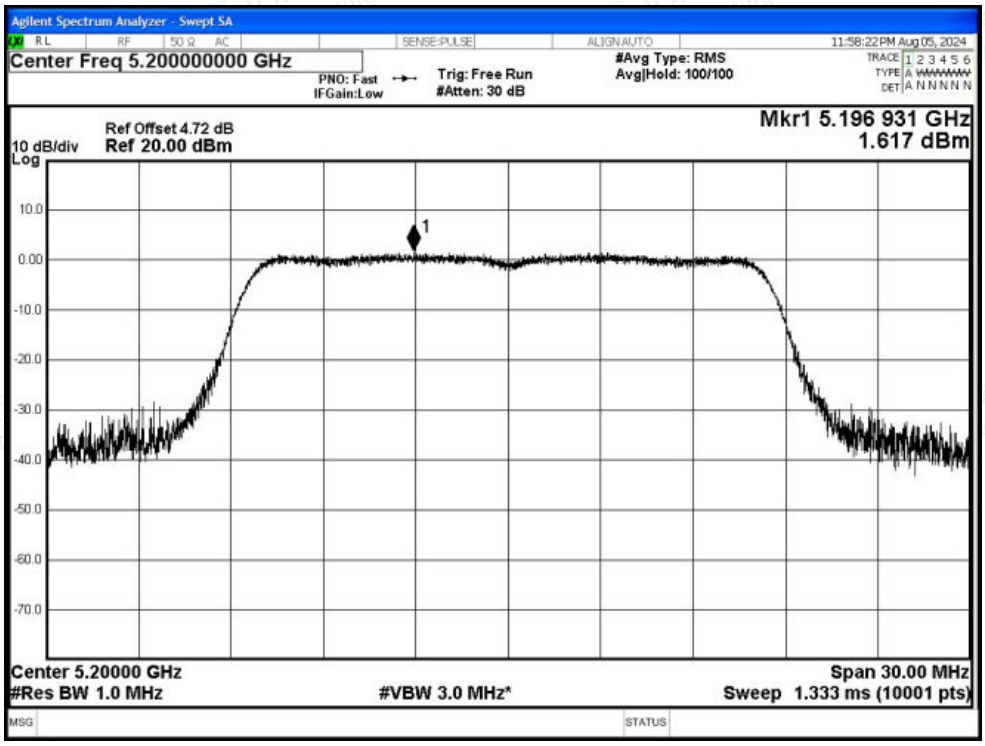

PSD NVNT a 5240MHz Ant1

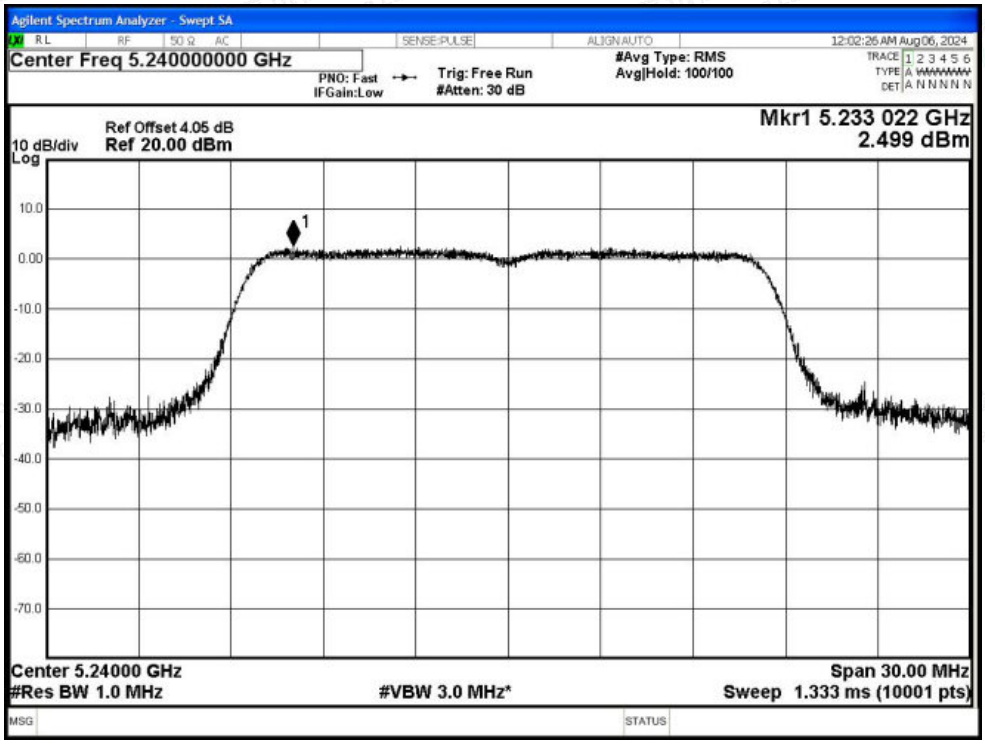

PSD NVNT n20 5180MHz Ant1

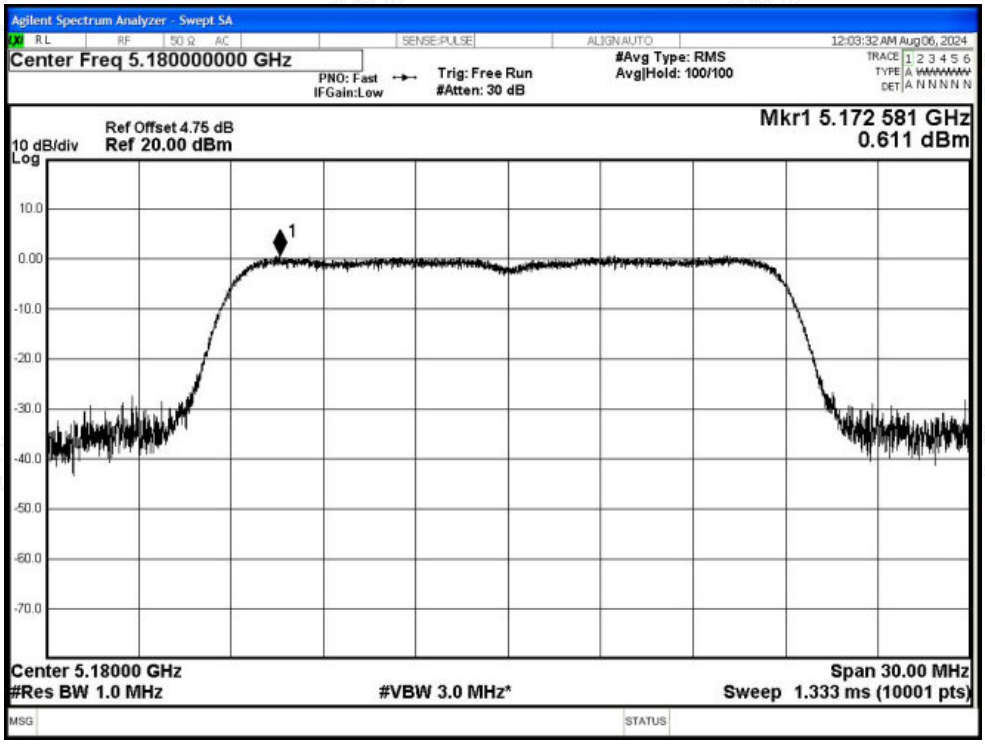

PSD NVNT n20 5200MHz Ant1

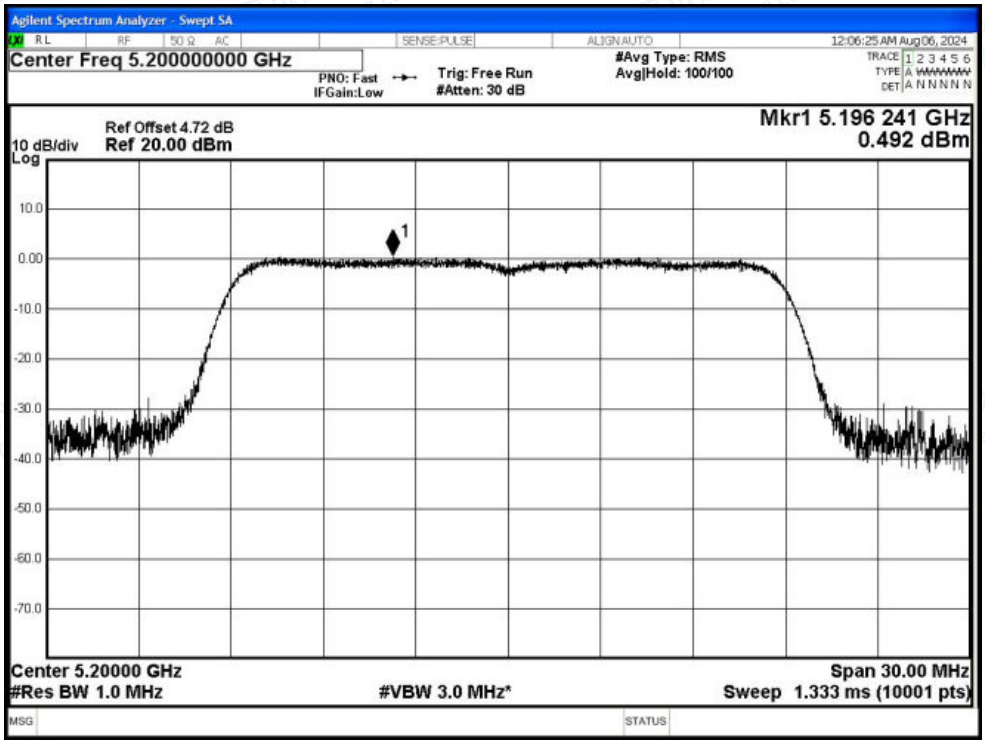

PSD NVNT n20 5240MHz Ant1

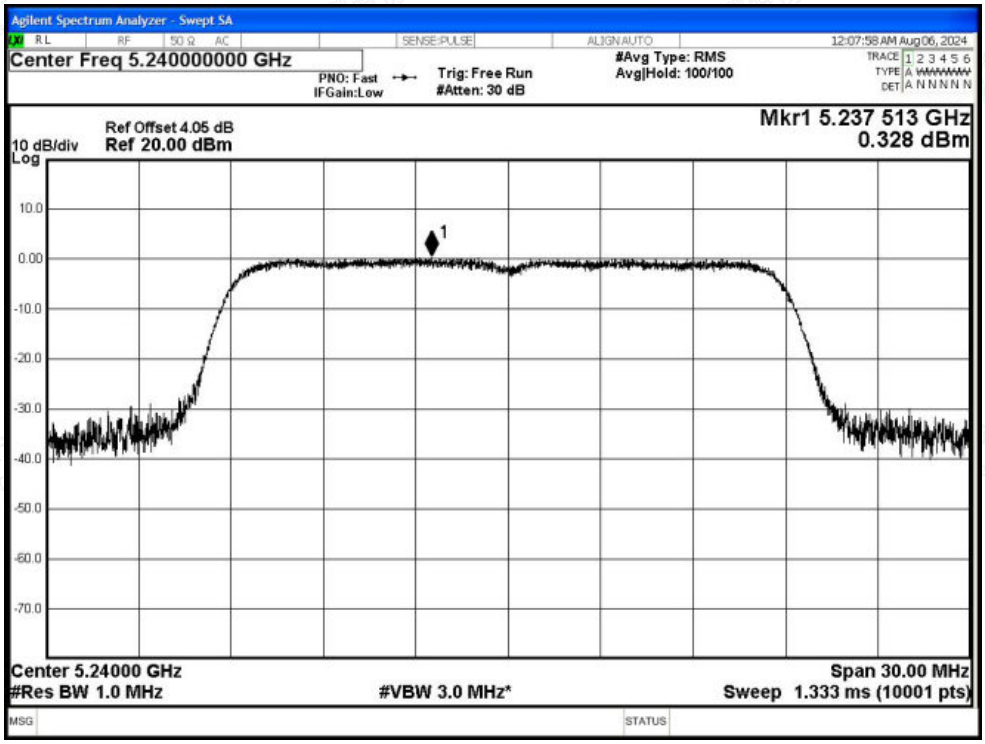

PSD NVNT n40 5190MHz Ant1

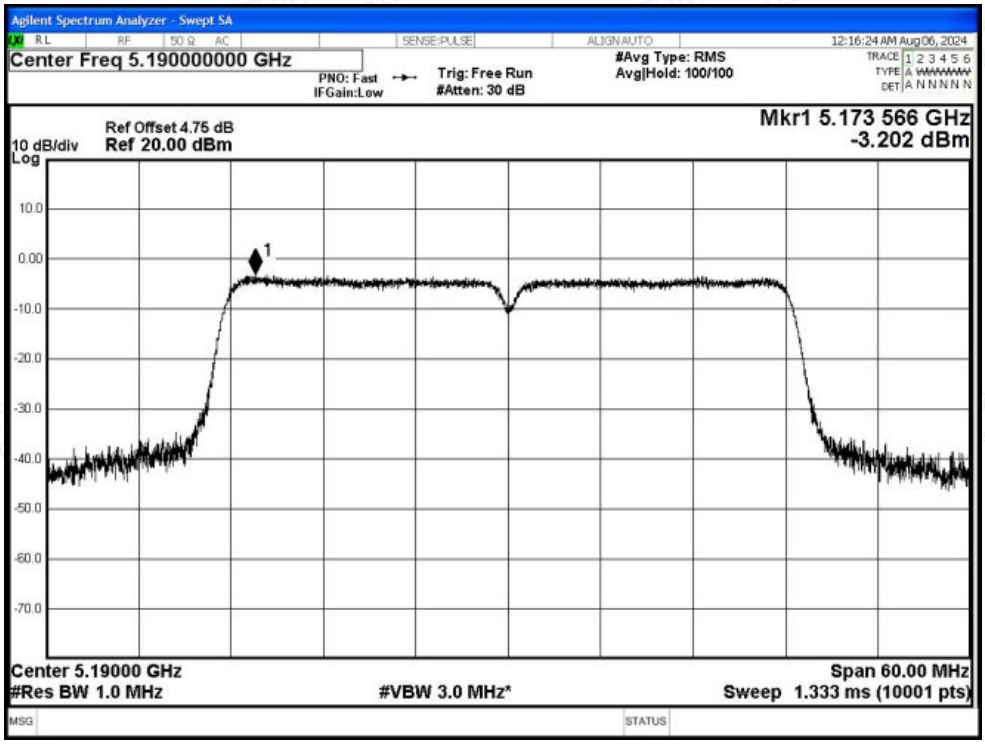

PSD NVNT n40 5230MHz Ant1

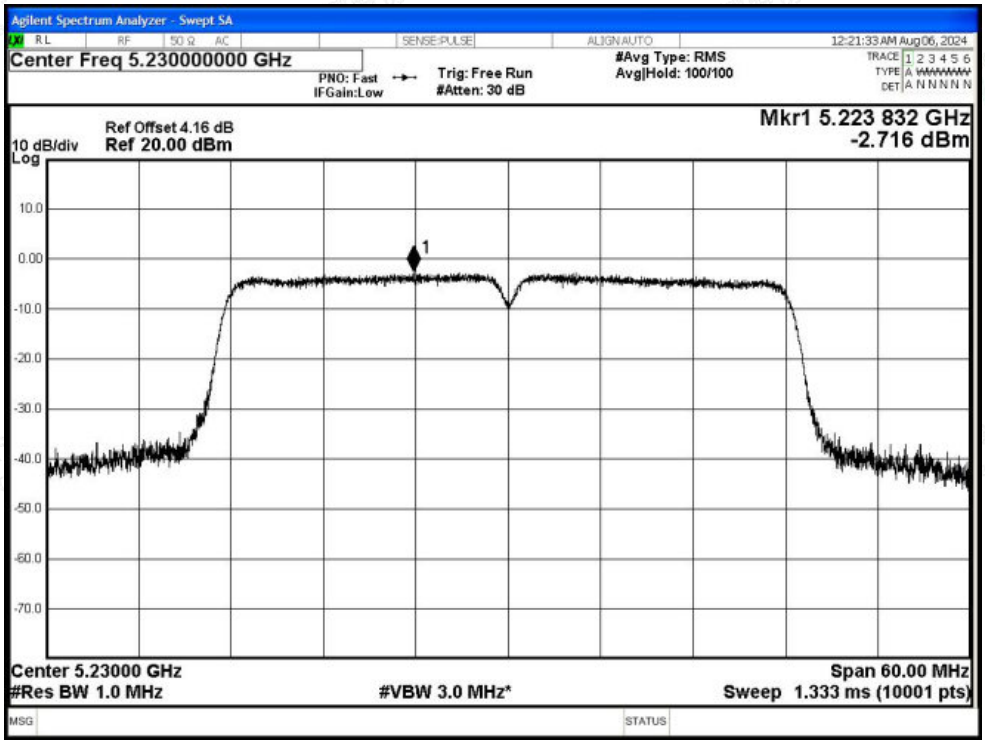

PSD NVNT ac20 5180MHz Ant1

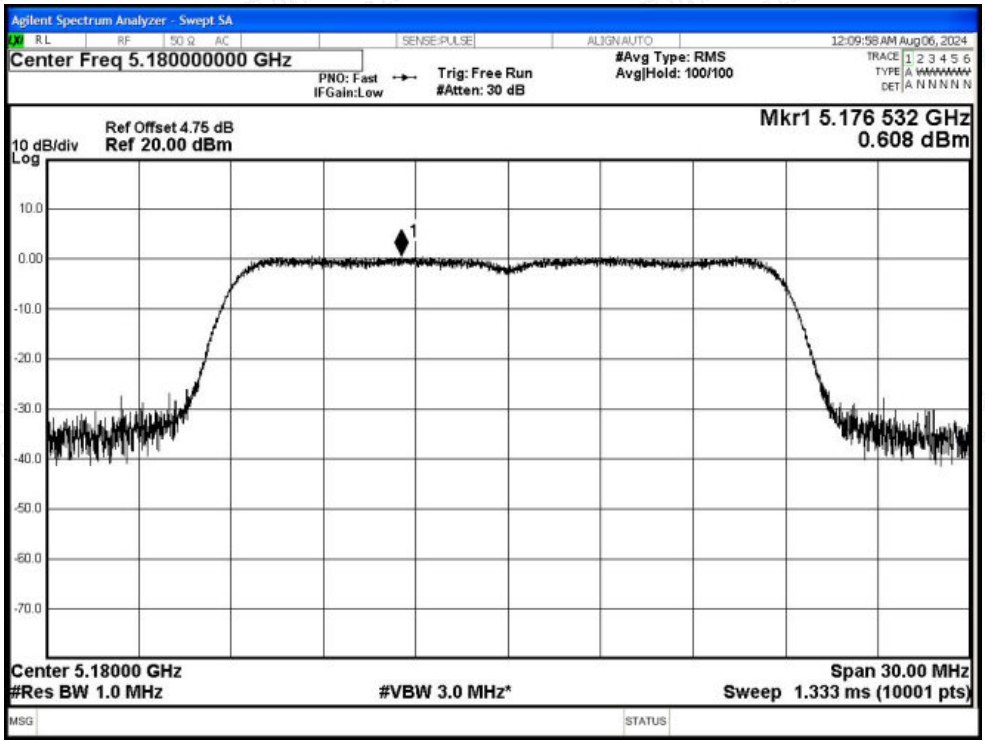

PSD NVNT ac20 5200MHz Ant1

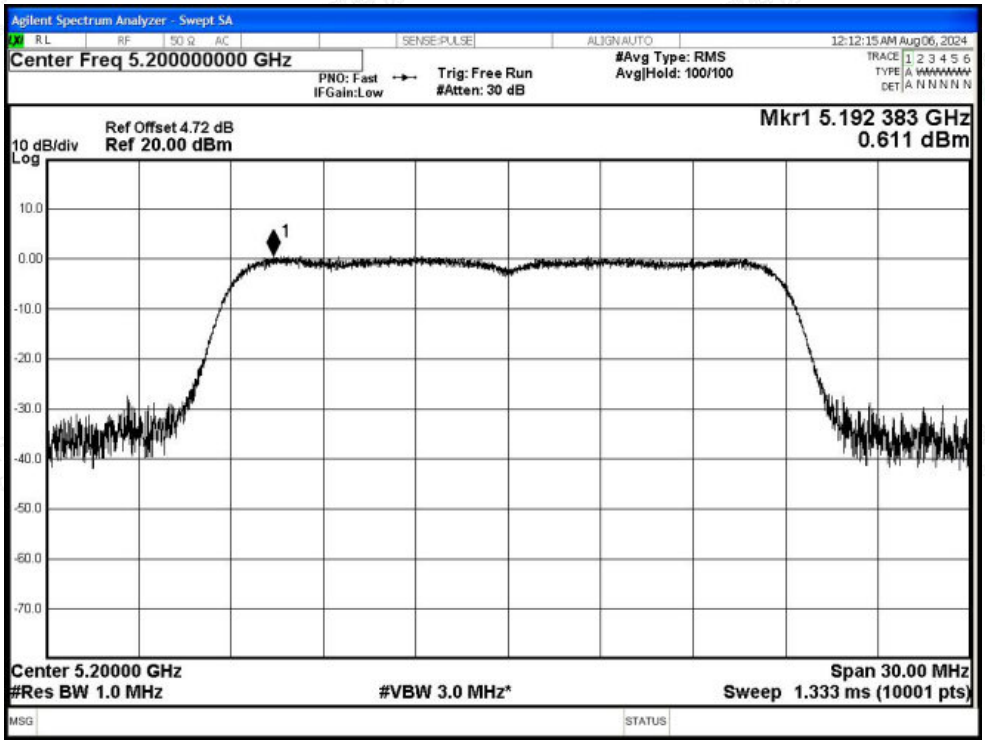

PSD NVNT ac20 5240MHz Ant1

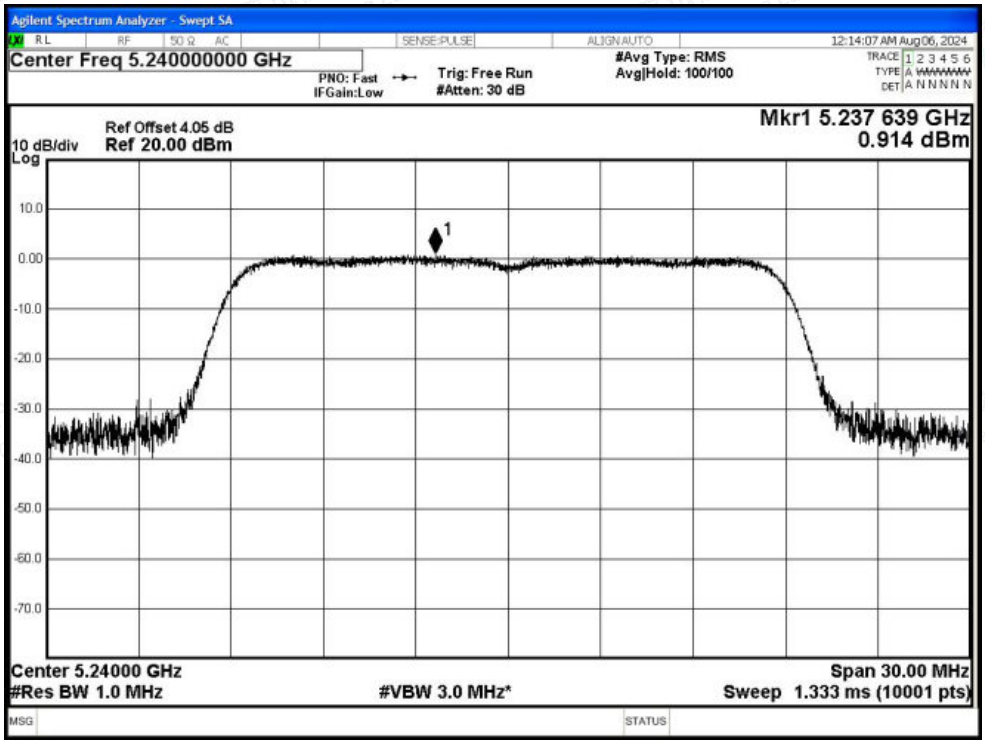

PSD NVNT ac40 5190MHz Ant1

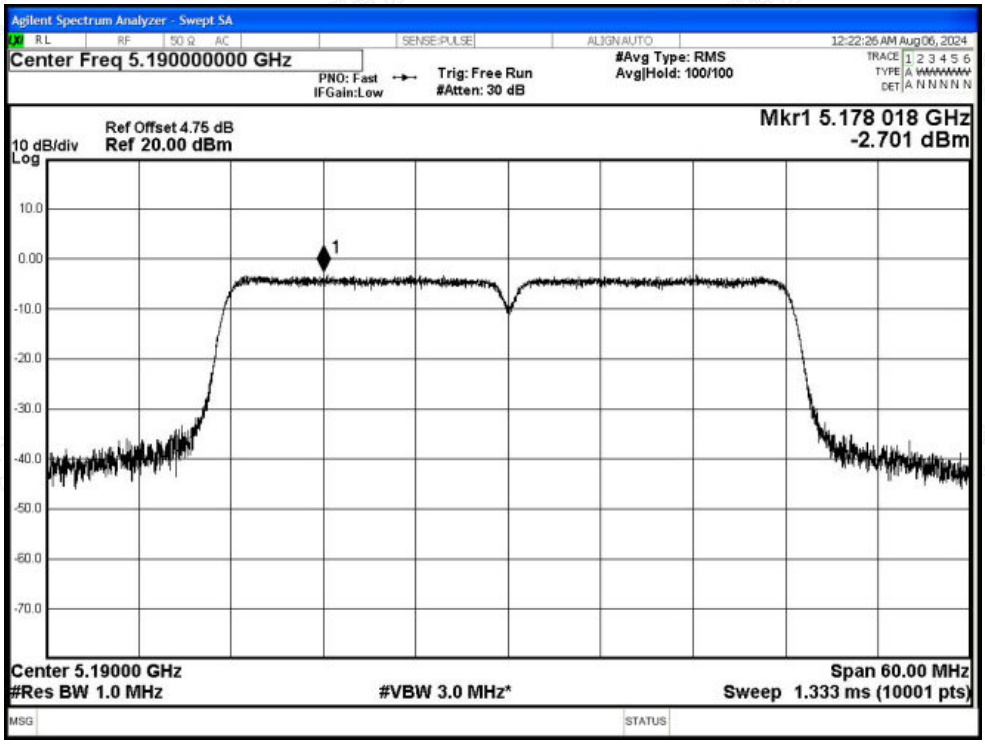

PSD NVNT ac40 5230MHz Ant1

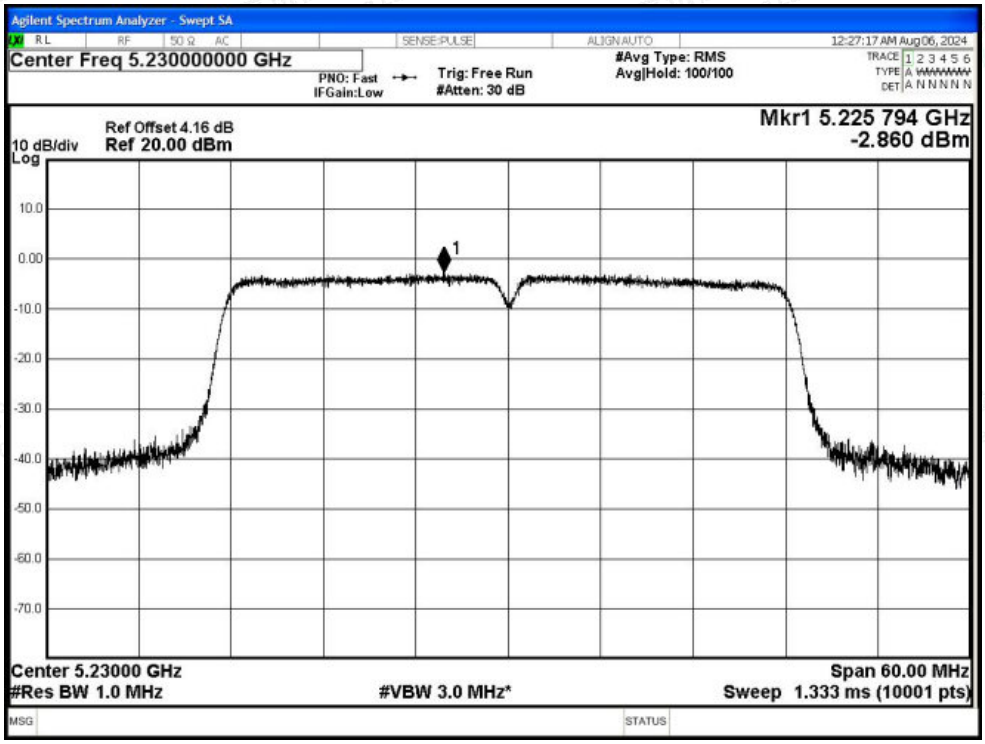

PSD NVNT ac80 5210MHz Ant1

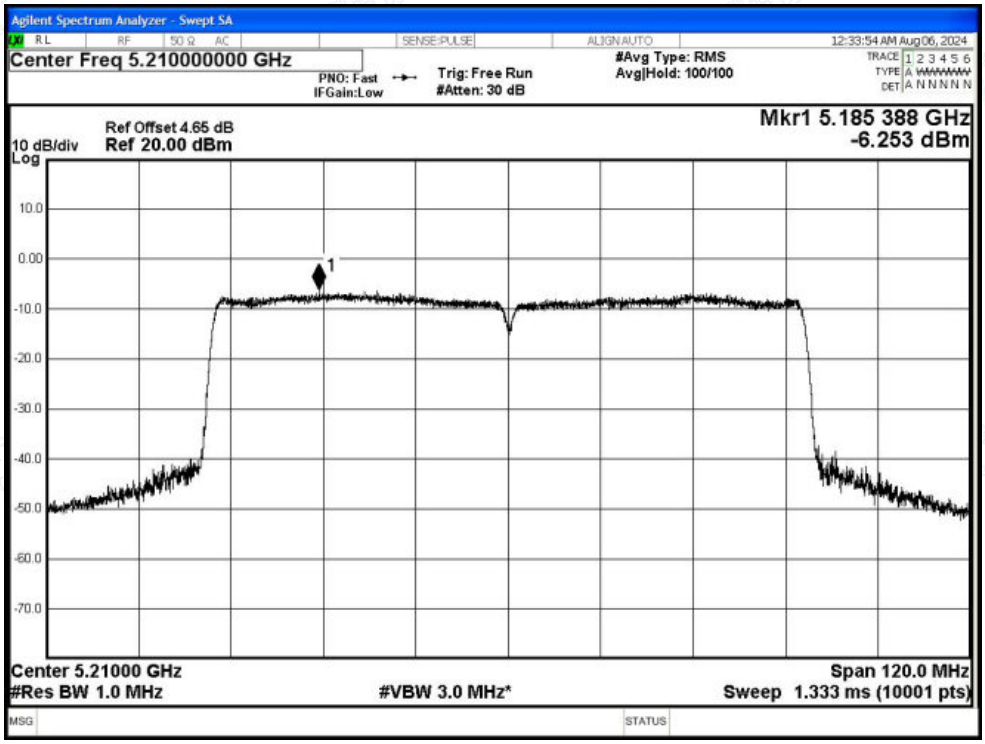

Test Graphs

PSD NVNT a 5180MHz Ant2

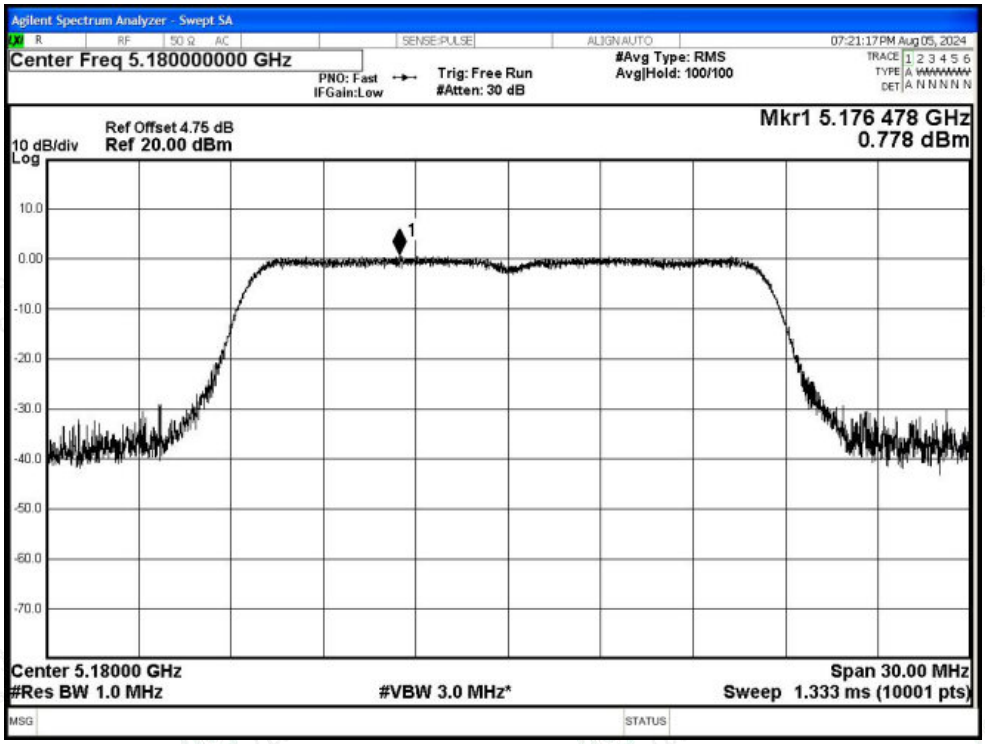

PSD NVNT a 5200MHz Ant2

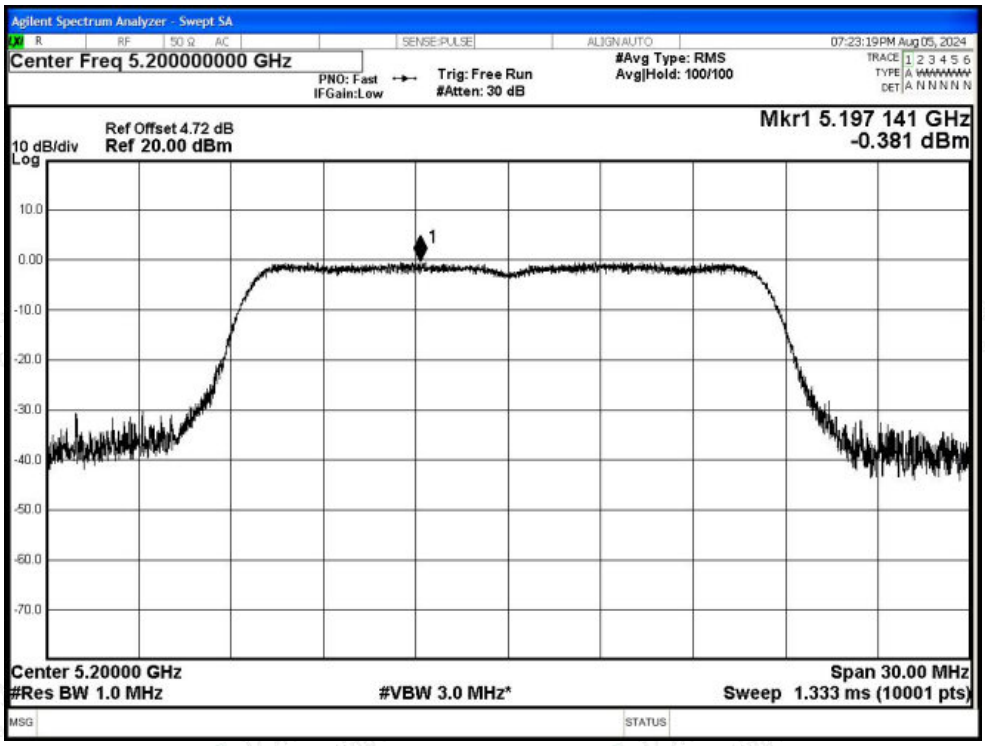

PSD NVNT a 5240MHz Ant2

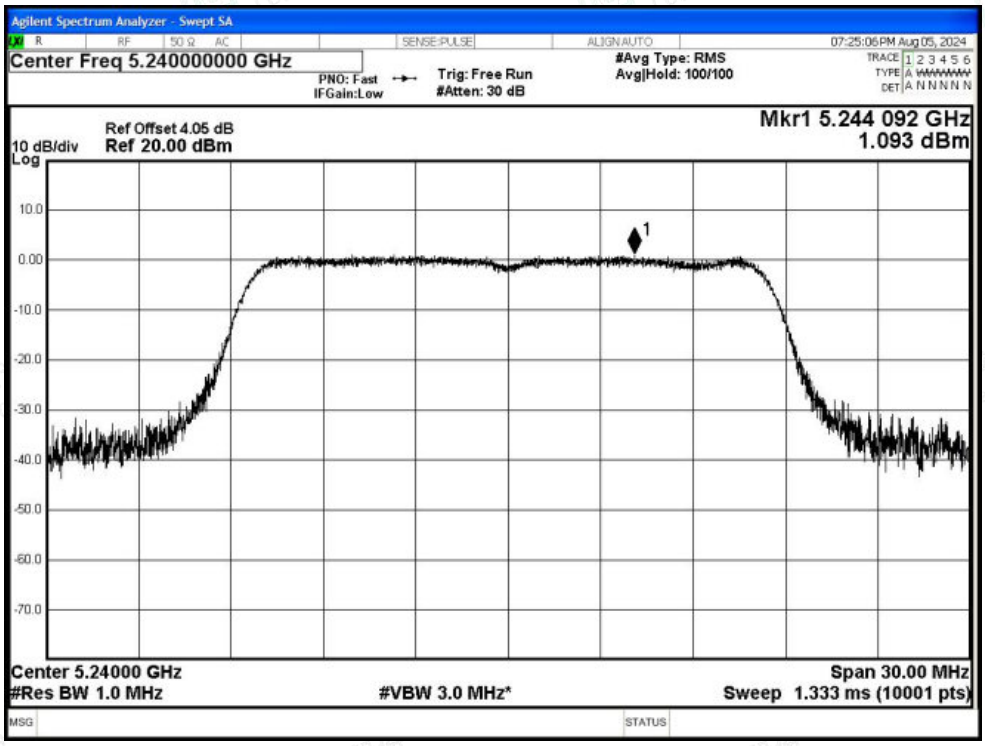

PSD NVNT n20 5180MHz Ant2

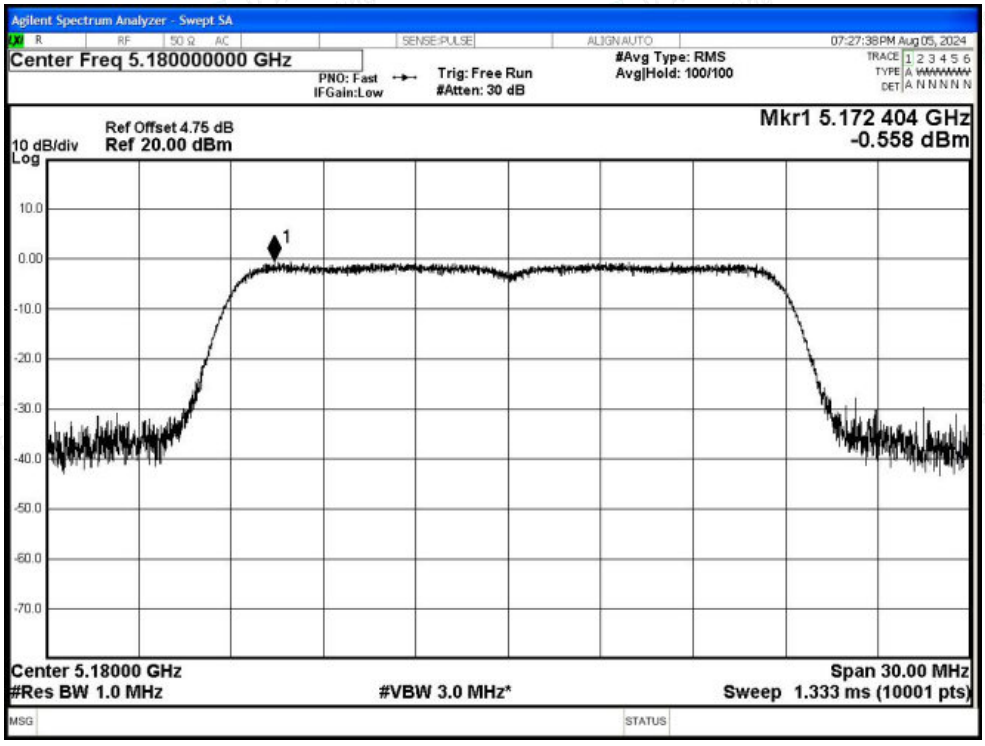

PSD NVNT n20 5200MHz Ant2

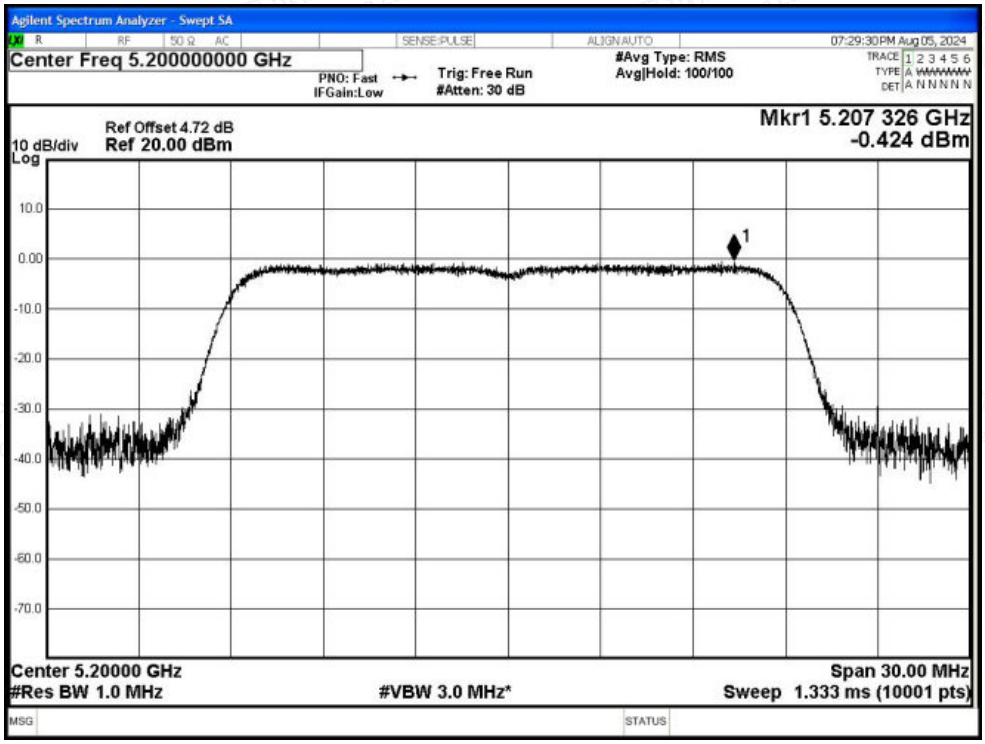

PSD NVNT n20 5240MHz Ant2

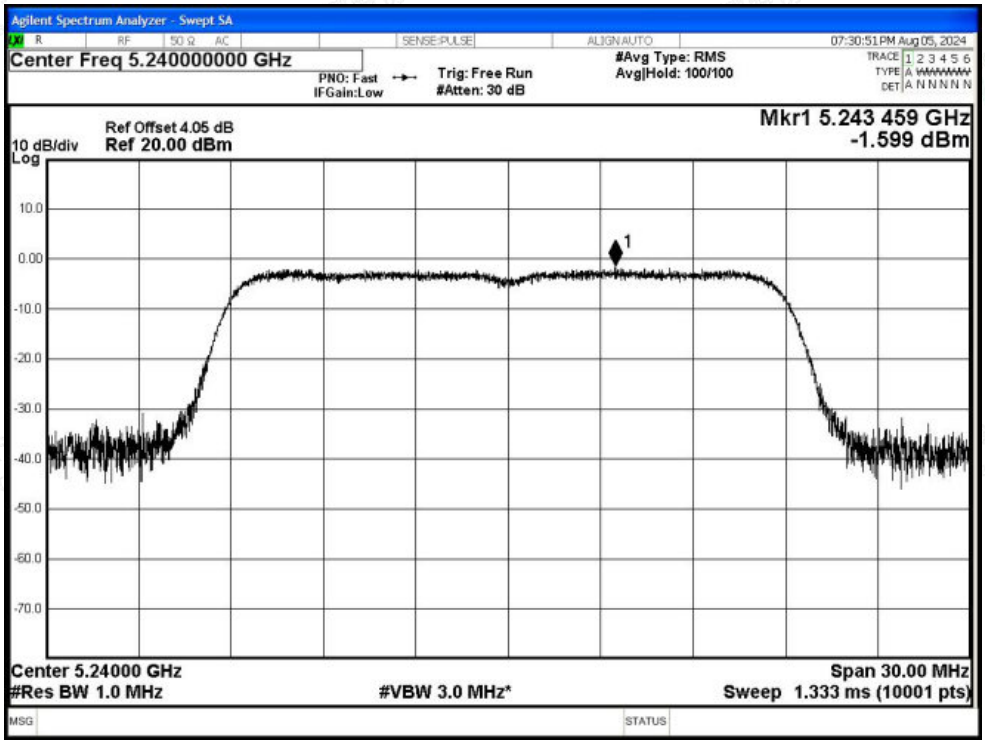

PSD NVNT n40 5190MHz Ant2

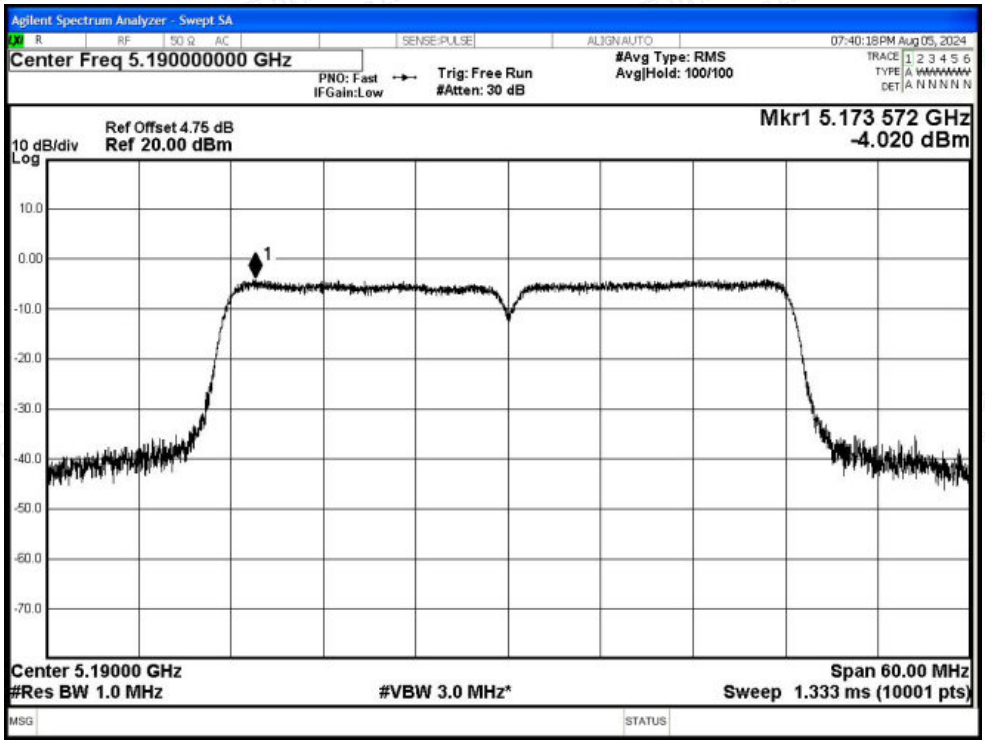

PSD NVNT n40 5230MHz Ant2

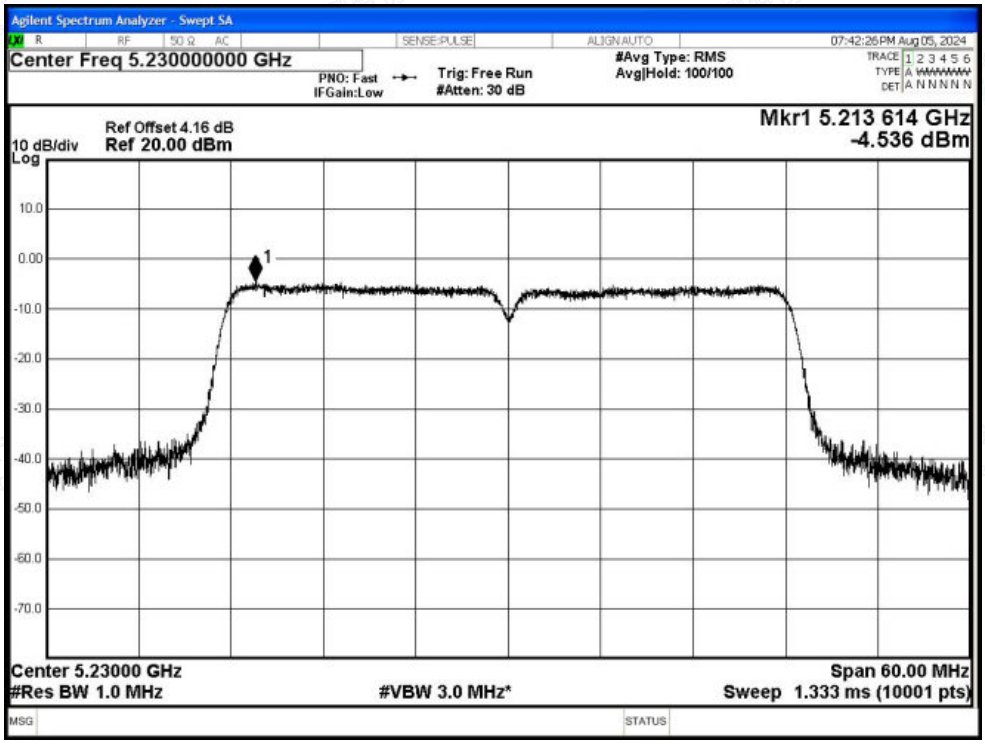

PSD NVNT ac20 5180MHz Ant2

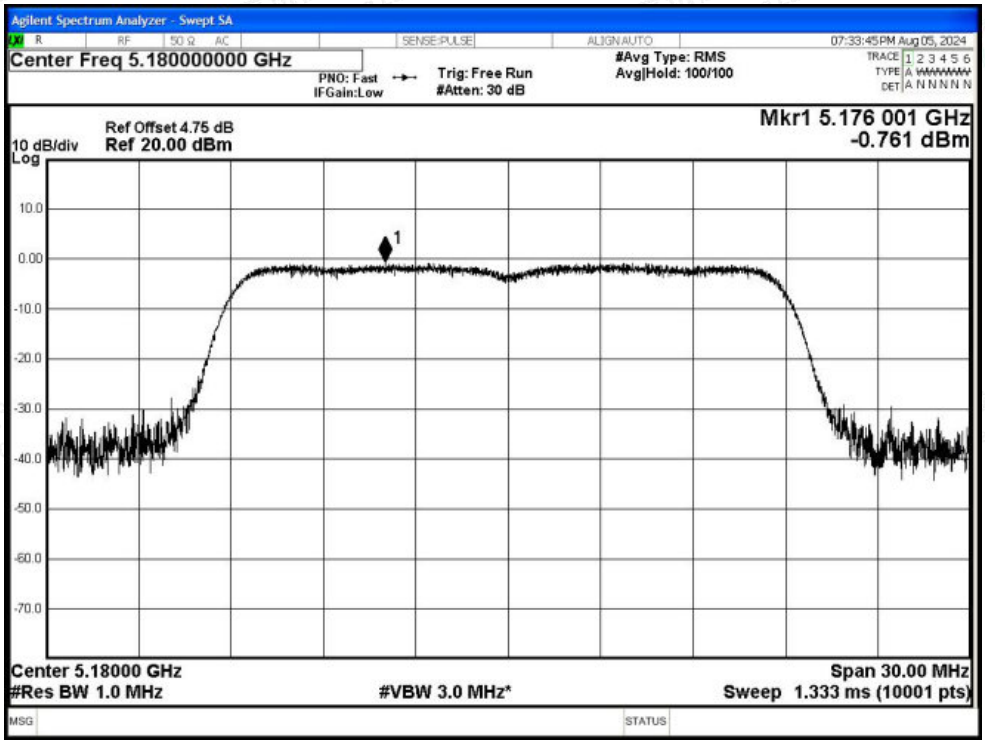

PSD NVNT ac20 5200MHz Ant2

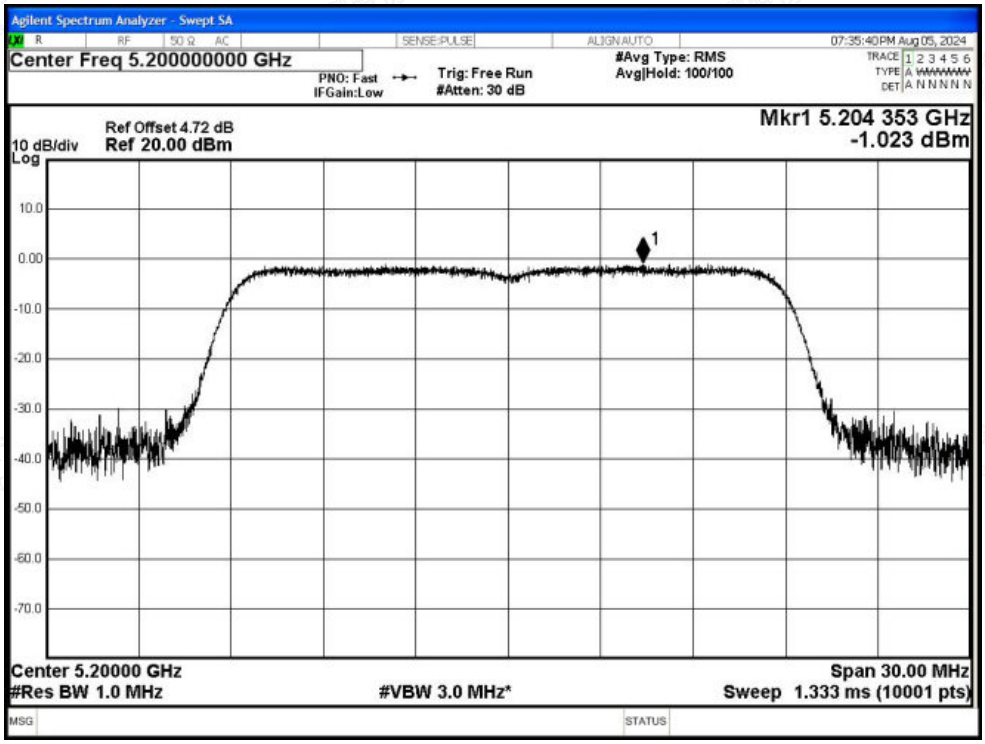

PSD NVNT ac20 5240MHz Ant2

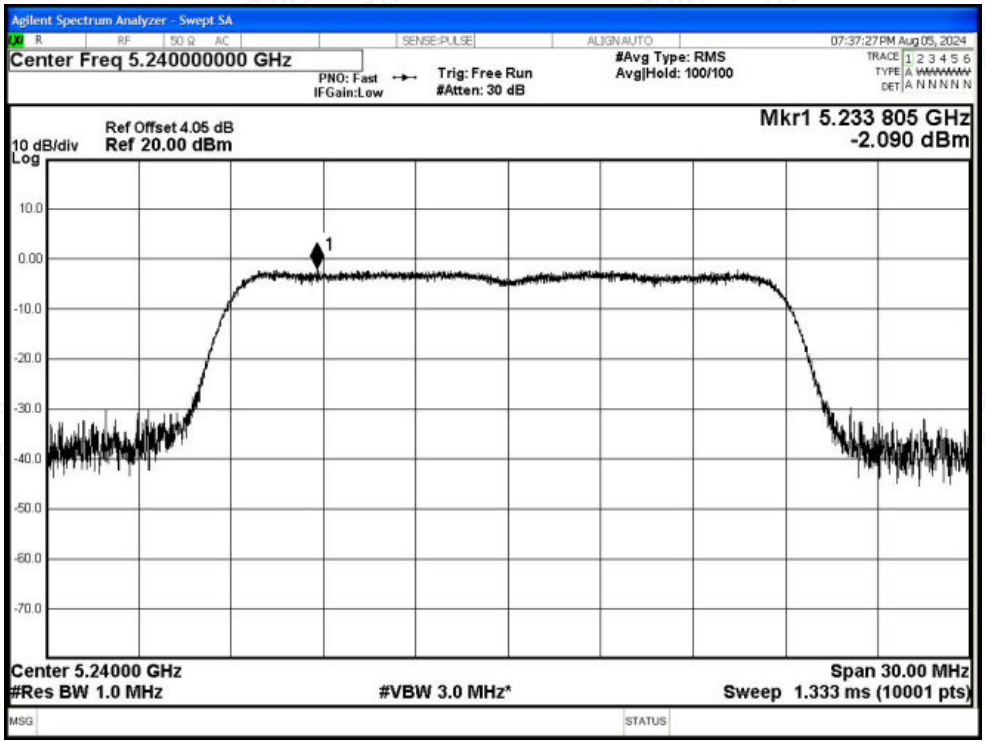

PSD NVNT ac40 5190MHz Ant2

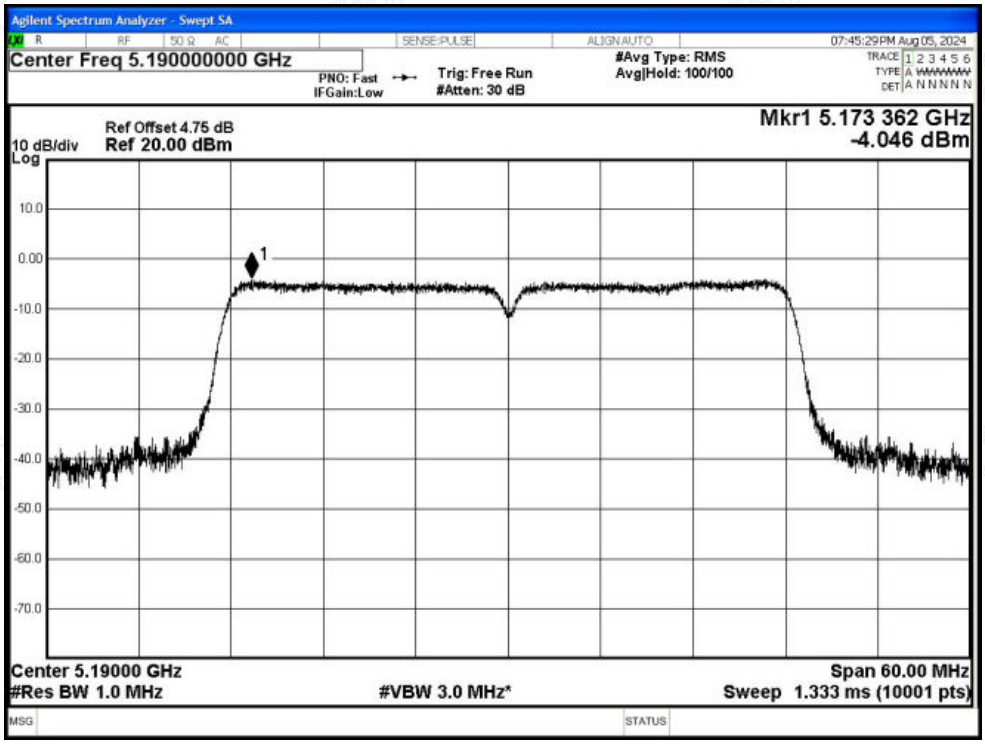

PSD NVNT ac40 5230MHz Ant2

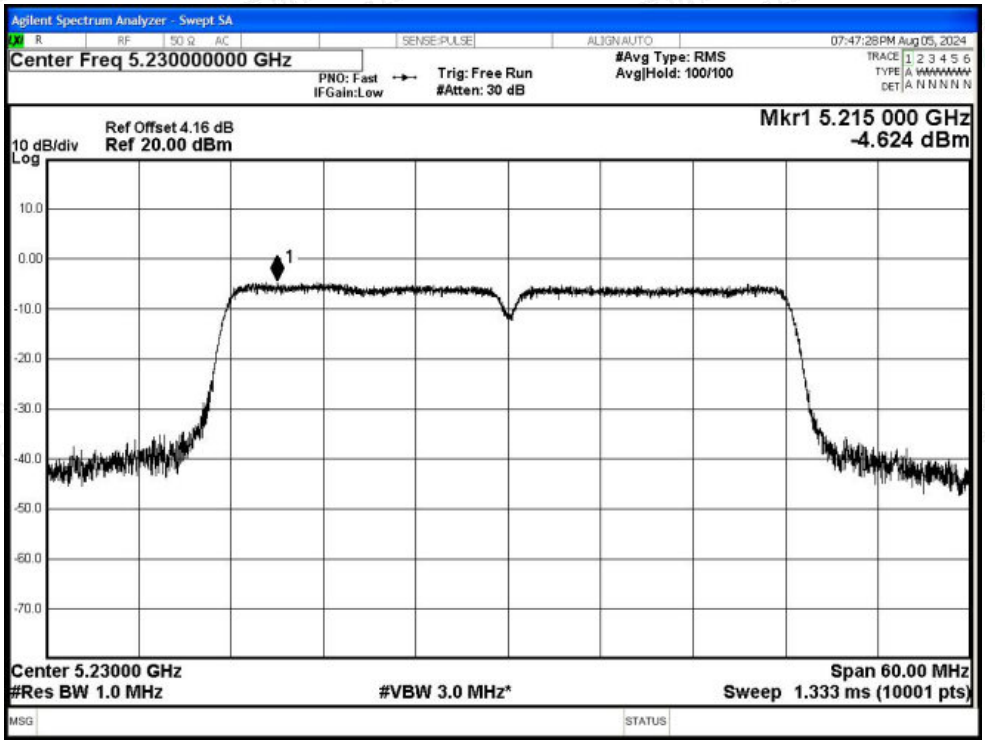
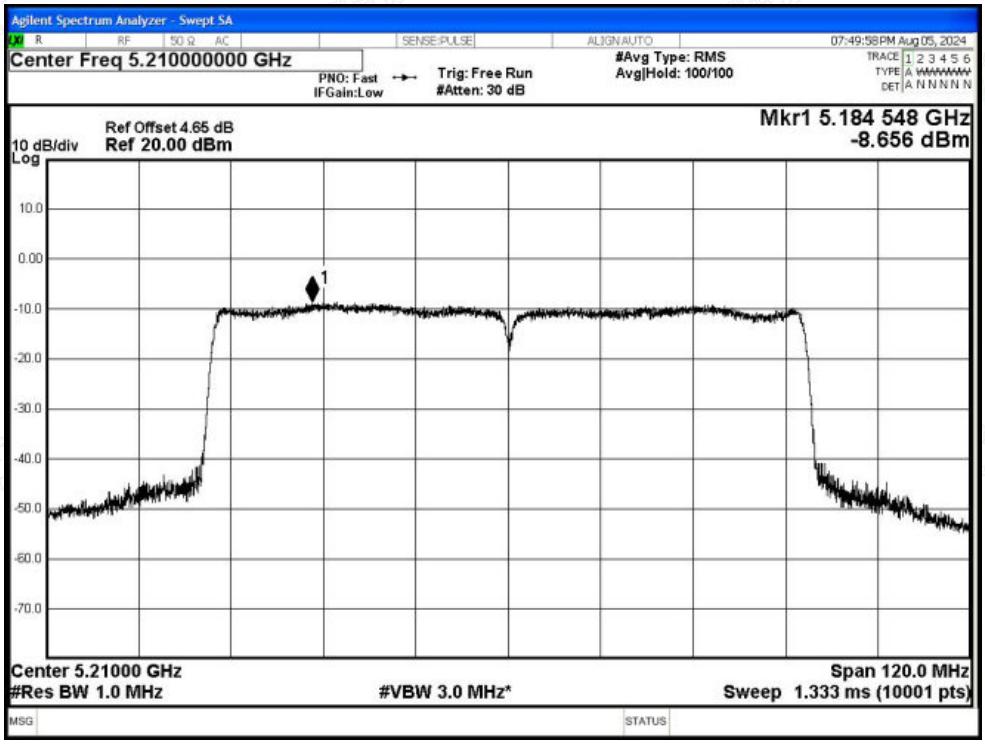
PSD NVNT ac80 5210MHz Ant2