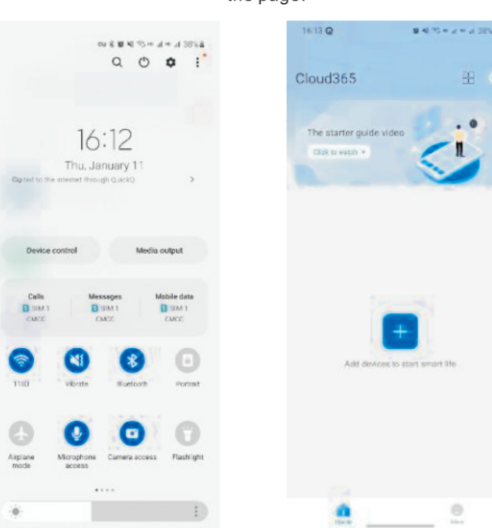
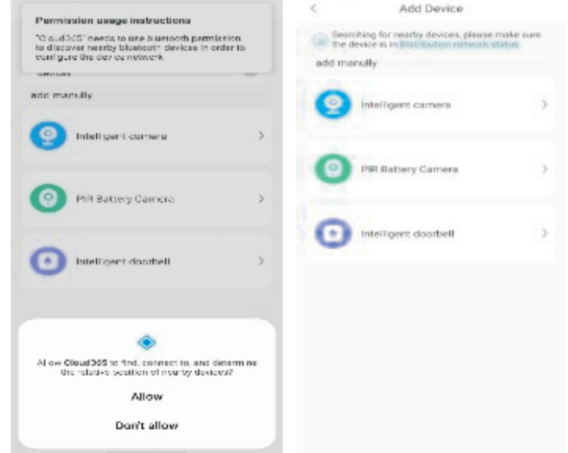
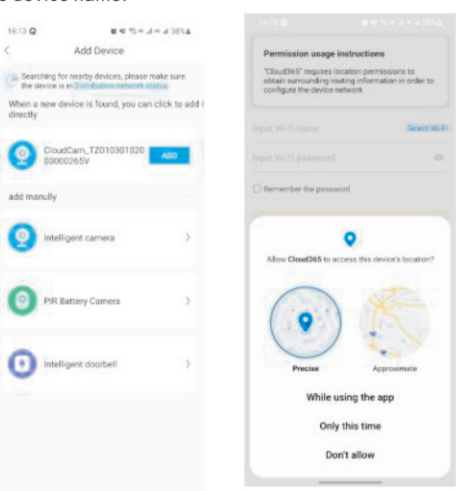
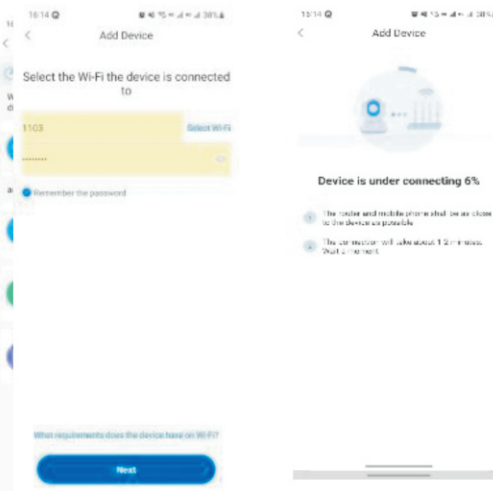
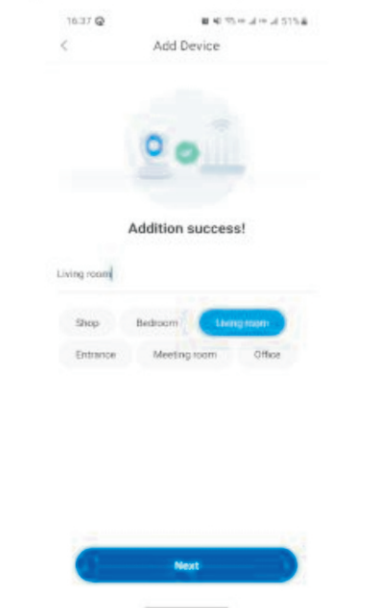

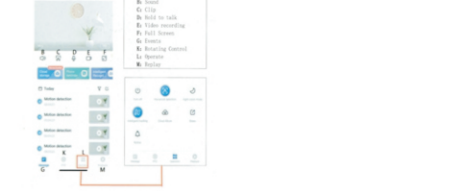






camera bluetooth speaker  Experience the enchantment of music, delight in the mesmerizing lights, and enjoy all-around protection with discreet surveillance for you and your family!	CONTENT Important Note: 1 1.Mobile APP download..... 2 2. How to add a camera..... 2 3. Add smart camera..... 3 3.2 Addition of AP Hotspot(Recommend This Method)..... 14 4.Features..... 9 4.1 Live preview interface..... 9 4.2 Rotating Lens (PTZ)..... 10 4.3 Video playback..... 10 4.5 Screen inspection..... 11 4.6 Smart reminder..... 12 4.7 Phone reminder..... 13 5.FAQ..... 14 5.1 Why WiFi The connection method cannot add the device?..... 14 5.2 Why is the recording intermittent?..... 14 5.3 Choose to record continuously or intermittently after inserting the TF card?..... 14 5.4 Why can't my phone receive alarm messages?(Turn on unmanned detection?and also? features)..... 15 5.5 What should I do if the camera is disconnected?..... 15 5.6 Why can't the shared account operate the camera?..... 16 5.7 Need to change WiFi How to connect a camera ?..... 16	Please read the important reminders below regarding device power before using: 1. To ensure the normal operation of the device, please do not remove the lithium battery and use the power cord directly. 2. When connecting the device for the first time, please remove the plastic spacer in the Li-ion battery compartment and make sure the power switch in the battery compartment is in the ON position. Wait for 1-2 minutes, the camera will be automatically detected and activated. Next, you can follow the normal process to connect the device via Bluetooth. 3. When the device is completely powered off, whether through plugging in or reinstalling the battery, you need to wait for 1-2 minutes for the device to automatically reconnect the monitoring function without manual operation. Please be patient. 4. If you want the device to perform reliable security monitoring for an extended period, please connect the device with the power cord to avoid monitoring vulnerabilities caused by low battery power. Please pay attention to the above important reminders about the device power and read them carefully before use to ensure the proper functioning of the device.	Instructions for use of the night light This night light has 5 light adjustment commands that can be operated through voice control: (1) Turn on light. (2) Change color. (3) Turn off light. (4) Dim light. (5) Brighten light. Please take note of the following important reminders: 1. The night light function can only be used when the device is connected to a power source, to ensure battery safety and energy efficiency. 2. Once the device is connected to a power source, the night light will automatically turn on by default. 3. The night light function is operated through voice control. 4. The night light offers three selectable colors: soft yellow, light white, and bright white. 5. The effective range for voice control should not exceed 3 meters. It is recommended to maintain a closer distance for better control and clarity. Additionally, the ambient noise in the surroundings directly affects the effectiveness and sensitivity of voice control. It is advised to use the night light in a quiet environment for optimal voice control performance.	 Please note that the device itself does not come with any numerical markings. The following illustrations are provided for convenience and understanding. We have specifically labeled the five buttons from left to right as Button 1, Button 2, Button 3, Button 4, and Button 5.	Important reminders regarding the clock and Bluetooth speaker functions: Clock function instructions: 1. The clock function of this device cannot automatically synchronize with the internet for accurate time. After starting the device for the first time, Please press and hold button 5 to turn on the clock. 2. Please note: The clock function and the Bluetooth speaker function are controlled by Button 5. 3. For specific clock settings, please refer to the following adjustment instructions. 4. Once the time is successfully set, when you hold down Button 5 to turn off the Bluetooth speaker and clock switch, the clock screen will turn off but continue to keep accurate time. When you reopen Button 5 to turn on the Bluetooth speaker and clock switch, the time will be displayed normally. 5. Please be aware that the clock requires continuous power supply, either from an undrained battery or direct connection to a power source. If the device loses power, reopening the clock may result in inaccurate time display and require readjustment.	Specific operation methods: Clock adjustment: 1. Long press Button 5, and the device will automatically start after 2 seconds. 2. Use Button 4 to control the adjustment of the hours, minutes, and seconds of the clock. Alternate use is required. 3. Single-click Button 4, and the hours part of the clock will start flashing. 4. Use Button 3 to adjust the hours part. 5. Single-click Button 4 again, and the minutes part will start flashing. 6. Use Button 2 to adjust the minutes part. 7. Single-click Button 4 again, and the seconds part will start flashing. 8. Use Button 1 to adjust the seconds part. Bluetooth Speaker User Instructions: 1. You can directly adjust the volume of the Bluetooth Speaker on your phone. 2. After Bluetooth connection, while in the playback mode, the camera's video recording function will work normally, but the audio recording function will not be able to record at the same time. 3. If the Bluetooth speaker prompts "Power low", please charge it in a timely manner.	Bluetooth Connection: 1. Press and hold the 5th button for 2 seconds to automatically power on the device. 2. When you hear the "Power on" prompt, it means the Bluetooth speaker has been successfully turned on. 3. When you hear the "Bluetooth mode" prompt, it means the Bluetooth mode is ready for connection. 4. Enable Bluetooth on your mobile device and connect to "Bluetooth music". 5. When you hear the "connection successful" prompt, it means the device is successfully connected to the Bluetooth speaker. 6. To disconnect, simply turn off the Bluetooth function on the speaker, and it will prompt "Disconnect". 7. Press and hold the 5th button again for 2 seconds to automatically power off the device, and the speaker will prompt "Power off".	Important Note: 1) Please read the manual before set up the camera, it will help you a lot and saving your times 2) Please fully charge and reset the camera before first time use 3) The camera can only be set up with 2.4g Wi-Fi network. (But you can use access live stream with 4G/5G network once you set it up with 2.4g first) 4) Please format the Micro SD to FAT32 and install that when powered off 5) Ensure the phone, router and camera is close enough when you're ready to pair them. (the Wi-Fi signal should be strong enough) 6)Reset can solve most of the problems wait. (Press and hold the reset for about 10 seconds, and see the lights through the hole flashing to indicate that the reset is successful, then give it about a minute or 2 wait for the device to reboot)	1.Mobile APP download To download our mobile app, simply search for "Cloud365" in your app store.  Scan the QR code below to download the APP 2. How to add a camera When using the app for the first time, you will need to register by providing your email or mobile phone number. Click the "Register" button to complete the user registration and you can log in for start using the app. 	Then, ensure the camera has power. After the WiFi is powered on (there is a button near the battery), the WiFi indicator will light on. (Near the Bluetooth power button), wait 30-60seconds, you can hear the device's motor sound, the camera lens is rotating, which means camera is reboot, when it is done, that camera is ready now. (if the camera does not working properly, please long press the Reset button to restore the factory settings). 3. Add smart camera 3.1 Connect via Bluetooth Step 1. Turn on your cell phone's Bluetooth Step 2. Open Cloud 365 software, click the "+" button in the middle of the page. 	Step 3. Open Cloud 365 software permissions, allow Cloud 365 to search and connect to your phone's Bluetooth. Step 4. In Add Device page, Cloud 365 will automatically search for the camera. 
--	---	---	--	--	--	---	--	---	---	---	---

Step 5. After searching the device "CloudCam_T20 XXXXXXXXXXXXXXXXXX", the corresponding click the "ADD" button next to the device name. Step 6. Jump to the WIFI connection page and set permissions. 	Step 7. Fill in the WIFI name and password, click "NEXT" Step 8. Wait for the automatic connection, the process will take about 1 to 2 minutes. 	Step 9. After successful connection, "Addition success" will appear, you can set the name tag for this camera. 	Step 10. Jump to the use page, you can start using the camera normally.  3.2 Addition of AP Hotspot (Recommend This Method) To add a camera using this method, follow these steps: •Open the app and go to the homepage •Click the "+" button, select "Intelligent Camera," and then choose ddition of AP Hotspot •Follow the wizard to connect to the WiFi with the "Cloud XXXXfield, then enter app, and click Next" after a successful connection •Select the WiFi network (router) that you want to connect to, enter the password, and click "Confirm" Wait for the app to display Addition success" to confirm that the network configuration is complete.	 4.Features 4.1 Live preview interface By clicking the Operation button, you can enter the operability interface, in which the night vision mode simply switches the display to black and white. It is not a night vision effect (the device does not have night vision lights) despite being described as such. In reality, it does not provide true night vision functionality. 	night vision functionality. 4.2 Rotating Lens (PTZ) By clicking the PTZ button, you can enter the camera control interface. You can rotate the lens by clicking the dial on the screen.  4.3 Video playback Reminder: Cloud video playback needs to be purchased and paid before it can be used. A. Select Playback" at the bottom right corner of the live interface to view the playback video of the camera. B. Switch playback path, you can choose to watch cloud playback/memory card playback.	 4.4 Watching videos on multiple screens (only applicable to multiple devices under the same account) On the device list, click the "Multi-split screen" button in the upper right corner, then you can watching videos on multiple screens  4.5 Screen inspection In the device list, click the "Screen Inspection" button, or in the "Tiny" interface, click the "Screen Inspection" button if you currently have a device that supports the purchase of value-added services, click "Buy now?" select the device, and make payment. When someone appears, use cloud AI analysis to filter invalid alarms for you, reduce corresponding false alarms, and provide you with effective and accurate alarms When it is detected that there are "abnormal brightness abnormal color cast, "video loss, "blurred video" trippes", and "snowflakes" on the screen of the device, a test report will be generated. 	device, a test report will be generated. Push message: Enter the "Screen Abnormal Inspection" interface, select the corresponding device, and you can view the inspection report  4.6 Smart reminder In the device list, click the "Smart Alert" button, or in the "Tiny" interface, click the "Smart Alert" button. If there is currently a device that supports the purchase of value-added services, click "Buy Now", select the device, and make payment. When someone appears, use cloud AI analysis to filter invalid alarms for you, reduce corresponding false alarms, and provide you with effective and accurate alarms Enter the "Smart Reminder interface, select the corresponding device, and you can view the test report	 4.7 Phone reminder To enable phone reminder, click the "Phone Reminder" button on the device list or on the "Tiny" page. If there is a device that supports purchasing value-added services, click "Buy Now", select the device, and make the payment. Once the phone reminder service is activated, the platform will immediately call the set phone number to notify you when suspicious activity is detected by the device's alarm through intelligent analysis. 	5.FAQ 5.1 Why WiFi The connection method cannot add the device? 1) Please make sure that the device has powered and have been restored to factory settings before adding the device (Long press the reset button waiting the WiFi indicator light flash, then wait 30-60s or more, the camera lens will rotating, when it done, means camera is ready now). 2)The camera only supports 2.4GHz WiFi signal. If it is a 5G route, please turn on the dual-band mode of the router and select the 2.4G signal. 3)Make sure that the distance between the router and the camera is within a reasonable range. 5.2 Why is the recording intermittent? The cloud service trial package, the alarm recording package and the TF card event recording mode will only record when the camera detects that the camera has moved, so the recording may not be continuous. 5.3 Choose to record continuously or intermittently after inserting the TF card? Make sure that the video viewing mode is selected as SD card, and format the SD card first. If it is still intermittent, it may be that the SD card has a bad pixel.2 If it is lost once or twice a day, about 2 minutes at a time, it is the camera to release the memory and restart. It is normal imagination.	5.4 Why can't my phone receive alarm messages?(Turn on unmanned detection?and also? features) 1) Confirm that the notification push permission of the APP in the mobile phone settings is turned on, and then turn on the message notification in the notification settings of the APP, and the current time is not in the planned time period for stopping the notification. Under normal circumstances, when an abnormality is detected, a message will appear in the notification bar of the mobile phone. Whether there is a sound or vibration depends on the settings of the mobile phone. 2)When viewing the real-time screen in the APP, you will not receive an alarm from the camera you are watching, because the default user is focusing on the monitoring screen at that time, and there is no need for an alarm. Using advanced intelligent alarm push algorithm, alarm messages will not be pushed frequently, but the camera will record and record all alarm messages. 5.5 What should I do if the camera is disconnected? First confirm whether the power supply and network are normal, and then power off and restart the camera if there is no problem. If it is still disconnected after restarting, please remove the camera in the APP and add it again.	5.6 Why can't the shared account operate the camera? For security reasons, the permissions of the shared account are restricted, and the device cannot be operated. If others want to operate the camera, they can log in directly with the bound account and password. 5.7 Need to change WiFi How to connect a camera ? Two methods: 1) camera does not change the place and can search for another WIFI in the parameter setting menu >> change the WIFI connected to the device >> change the corresponding WIFI 2) The camera has changed places and cannot find another WIFI, so reconfigure the camera
---	---	---	---	---	---	---	---	--	---	--	---

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.