RF Test Report

FCC ID: 2BKX3-MAG555

Report No.	:	TBR-C-202406-0129-123
Applicant	:	DEVPRO OU
Equipment Under Test (EUT)		
EUT Name	:	STREAMING MEDIA PLAYER
Model No.	:	MAG555
Series Model No.	:	N/A
Brand Name	:	N/A
Sample ID	:	HC-C-202406-0129-01-01&HC-C-202406-0129-01-02
Receipt Date	:	2024-07-15
Test Date	:	2024-07-16 to 2024-08-03
Issue Date	:	2024-08-03
Standards	:	FCC Part 15 Subpart E 15.407
Test Method	:	ANSI C63.10: 2013 KDB 789033 D02 General UNII Test Procedures New Rules v02r01 KDB 662911 D01 Multiple Transmitter Output v02r01
Conclusions	:	**PASS**
		In the configuration tested, the EUT complied with the standards specified above.
Test By	:	Jolin Lee
Reviewed By	:	Wade Lv
Approved By	:	Ivan Su

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

1/F.,Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China
Tel: +86 75526509301 Fax: +86 75526509195

Contents

CONTENTS **2**
1. GENERAL INFORMATION ABOUT EUT **5**
1.1 Client Information 5
1.2 General Description of EUT (Equipment Under Test) 5
1.3 Block Diagram Showing the Configuration of System Tested 7
1.4 Description of Support Units 7
1.5 Description of Test Mode 8
1.6 Description of Test Software Setting 10
1.7 Measurement Uncertainty 12
1.8 Test Facility 13
2. TEST SUMMARY **14**
3. TEST SOFTWARE **14**
4. TEST EQUIPMENT AND TEST SITE **15**
5. CONDUCTED EMISSION TEST **16**
5.1 Test Standard and Limit 16
5.2 Test Setup 16
5.3 Test Procedure 16
5.4 Deviation From Test Standard 16
5.5 EUT Operating Mode 16
5.6 Test Data 16
6. RADIATED AND CONDUCTED UNWANTED EMISSIONS **17**
6.1 Test Standard and Limit 17
6.2 Test Setup 18
6.3 Test Procedure 19
6.4 Deviation From Test Standard 20
6.5 EUT Operating Mode 20
6.6 Test Data 20
7. RESTRICTED BANDS REQUIREMENT **21**
7.1 Test Standard and Limit 21
7.2 Test Setup 22
7.3 Test Procedure 22
7.4 Deviation From Test Standard 23
7.5 EUT Operating Mode 23
7.6 Test Data 23
8. BANDWIDTH TEST **24**
8.1 Test Standard and Limit 24
8.2 Test Setup 24
8.3 Test Procedure 24
8.4 Deviation From Test Standard 25
8.5 EUT Operating Mode 25
8.6 Test Data 25

9. MAXIMUM CONDUCTED OUTPUT POWER 26
9.1 Test Standard and Limit 26
9.2 Test Setup 26
9.3 Test Procedure 26
9.4 Deviation From Test Standard 26
9.5 EUT Operating Mode 26
9.6 Test Data 26
10. POWER SPECTRAL DENSITY TEST 27
10.1 Test Standard and Limit 27
10.2 Test Setup 27
10.3 Test Procedure 27
10.4 Deviation From Test Standard 28
10.5 Antenna Connected Construction 28
10.6 Test Data 28
11. FREQUENCY STABILITY 29
11.1 Test Standard and Limit 29
11.2 Test Setup 29
11.3 Test Procedure 29
11.4 Deviation From Test Standard 30
11.5 Antenna Connected Construction 30
11.6 Test Data 30
12. ANTENNA REQUIREMENT 31
12.1 Test Standard and Limit 31
12.2 Deviation From Test Standard 31
12.3 Antenna Connected Construction 31
12.4 Test Data 31
ATTACHMENT A-- CONDUCTED EMISSION TEST DATA 32
ATTACHMENT B--UNWANTED EMISSIONS DATA 34
ATTACHMENT C-- RESTRICTED BANDS REQUIREMENT TEST DATA 106

Revision History

Report No.	Version	Description	Issued Date
TBR-C-202406-0129-123	Rev.01	Initial issue of report	2024-08-03

1. General Information about EUT

1.1 Client Information

Applicant	:	DEVPRO OU
Address	:	Roobu 9, 74114 Maardu, Estonia
Manufacturer	:	DEVPRO OU
Address	:	Roobu 9, 74114 Maardu, Estonia

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	STREAMING MEDIA PLAYER			
Models No.	:	MAG555			
Model Different	:	N/A			
Product Description	:	Operation Frequency: U-NII-1: 5180MHz~5240MHz, U-NII-2A: 5260MHz~5320MHz U-NII-2C: 5500MHz~5720MHz, U-NII-3: 5745MHz~5825MHz			
		Antenna Designation:	Metal Ant.	Gain-Ant.1	Gain-Ant.2
			U-NII-1	4.11dBi	4.11dBi
			U-NII-2A	4.36dBi	4.36dBi
			U-NII-2C	4.66dBi	4.66dBi
			U-NII-3	4.37dBi	4.37dBi
		Modulation Type:	802.11a: OFDM (QPSK, BPSK, 16QAM, 64QAM) 802.11n: OFDM (QPSK, BPSK, 16QAM, 64QAM) 802.11ac: OFDM (QPSK, BPSK, 16QAM, 64QAM, 256QAM)		
Power Rating	:	AC Adapter:(SA12BV-120100U)(**Manufacturer: SUNUN**) Input: 100-240V~, 50/60Hz 0.4A Output: 12.0V⎓1.0A			
Software Version	:	N/A			
Hardware Version	:	MB.029.B2			

Remark:
(1)The antenna gain and adapter provided by the applicant, the verified for the RF conduction test provided by TOBY test lab.
(2)The above antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
(3)For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

(4) Channel List:

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5180~5240MHz **(U-NII-1)**	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz		
For 20 MHz Bandwidth, use channel 36, 40, 44, 48. For 40 MHz Bandwidth, use channel 38, 46. For 80 MHz Bandwidth, use channel 42.				
Frequency Band	**Channel No.**	**Frequency**	**Channel No.**	**Frequency**
5260~5320 MHz **(U-NII-2A)**	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310MHz
	56	5280MHz	64	5320 MHz
	58	5290MHz		
For 20 MHz Bandwidth, use channel 52, 56, 60, 64. For 40 MHz Bandwidth, use channel 54, 62. For 80 MHz Bandwidth, use channel 58.				
Frequency Band	**Channel No.**	**Frequency**	**Channel No.**	**Frequency**
5500~5720 MHz **(U-NII-2C)**	100	5500 MHz	124	5620 MHz
	102	5510 MHz	126	5630 MHz
	104	5520 MHz	128	5640 MHz
	106	5530 MHz	132	5660 MHz
	108	5540 MHz	134	5670 MHz
	110	5550 MHz	136	5680 MHz
	112	5560 MHz	138	5690 MHz
	116	5580 MHz	140	5700 MHz
	118	5590 MHz	142	5710 MHz
	120	5600 MHz	144	5720 MHz
	122	5610 MHz		
For 20 MHz Bandwidth, use channel 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 144 For 40 MHz Bandwidth, use channel 102, 110, 118, 126, 134, 142 For 80 MHz Bandwidth, use channel 106, 122, 138				
Frequency Band	**Channel No.**	**Frequency**	**Channel No.**	**Frequency**
5745~5825MHz **(U-NII-3)**	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz
For 20 MHz Bandwidth, use channel 149, 153, 157, 161, 165. For 40 MHz Bandwidth, use channel 151, 159. For 80 MHz Bandwidth, use channel 155.				

1.3 Block Diagram Showing the Configuration of System Tested

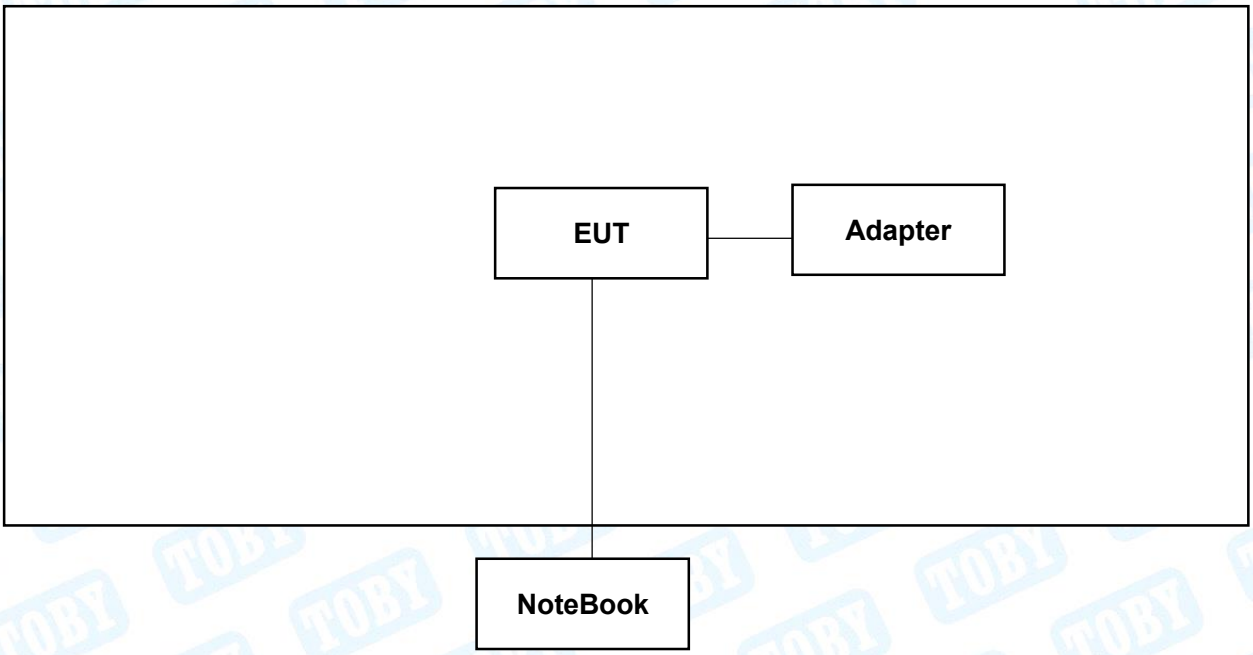

1.4 Description of Support Units

Equipment Information				
Name	**Model**	**S/N**	**Manufacturer**	**Used "√"**
Notebook	HYLR-WFQ9	AAMFPM1418000165	honour	√

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test(AC POWER)		
Final Test Mode		**Description**
Mode 1		TX a Mode(5180MHz)
For Radiated Test Below 1GHz		
Final Test Mode		**Description**
Mode 1		TX a Mode(5180MHz)
For Radiated Above 1GHz and RF Conducted Test		
Test Band	**Final Test Mode**	**Description**
U-NII-1	Mode 2	TX Mode 802.11a Mode Channel 36/40/48
	Mode 3	TX Mode 802.11n(HT20) Mode Channel 36/40/48
	Mode 4	TX Mode 802.11ac(VHT20) Mode Channel 36/40/48
	Mode 5	TX Mode 802.11n(HT40) Mode Channel 38/46
	Mode 6	TX Mode 802.11ac(VHT40) Mode Channel 38/46
	Mode 7	TX Mode 802.11ac(VHT80) Mode Channel 42
U-NII-2A	Mode 8	TX Mode 802.11a Mode Channel 52/56/64
	Mode 9	TX Mode 802.11n(HT20) Mode Channel 52/56/64
	Mode 10	TX Mode 802.11ac(VHT20) Mode Channel 5256/64
	Mode 11	TX Mode 802.11n(HT40) Mode Channel 54/62
	Mode 12	TX Mode 802.11ac(VHT40) Mode Channel 54/62
	Mode 13	TX Mode 802.11ac(VHT80) Mode Channel 58
U-NII-2C	Mode 14	TX Mode 802.11a Mode Channel 100/116/140
	Mode 15	TX Mode 802.11n(HT20) Mode Channel 100/116/140/144
	Mode 16	TX Mode 802.11ac(VHT20) Mode Channel 100/116/140/144
	Mode 17	TX Mode 802.11n(HT40) Mode Channel 102/110/134/142
	Mode 18	TX Mode 802.11ac(VHT40) Mode Channel 102/110/134/142
	Mode 19	TX Mode 802.11ac(VHT80) Mode Channel 106/122/138
U-NII-3	Mode 20	TX Mode 802.11a Mode Channel 149/157/165
	Mode 21	TX Mode 802.11n(HT20) Mode Channel 149/157/165
	Mode 22	TX Mode 802.11ac(VHT20) Mode Channel 149/157/165
	Mode 23	TX Mode 802.11n(HT40) Mode Channel 151/159
	Mode 24	TX Mode 802.11ac(VHT40) Mode Channel 151/159
	Mode 25	TX Mode 802.11ac(VHT80) Mode Channel 155

Note:

(1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.

According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:

802.11a Mode: OFDM (6 Mbps)
802.11n (HT20) Mode: MCS 8
802.11n (HT40) Mode: MCS 8
802.11ac(VHT20) Mode: MCS 0/ Nss1
802.11ac(VHT40) Mode: MCS 0/ Nss1
802.11ac(VHT80) Mode: MCS 0/ Nss1

(2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.

(3) The EUT is considered a Mobile unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel& Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of RF setting.

Test Software: adb command			
U-NII-1			
Mode	Frequency (MHz)	Parameters	
		Ant.1	Ant.2
802.11a	5180	80	76
	5200	84	84
	5240	84	86
802.11n(HT20)	5180	86	84
	5200	82	84
	5240	82	84
802.11n(HT40)	5190	84	86
	5230	84	86
802.11ac(VHT20)	5180	82	86
	5200	84	86
	5240	84	86
802.11ac(VHT40)	5190	82	80
	5230	84	86
802.11ac(VHT80)	5210	76	80
U-NII-2A			
Mode	Frequency (MHz)	Parameters	
		Ant.1	Ant.2
802.11a	5260	84	86
	5280	88	88
	5320	82	84
802.11n(HT20)	5260	82	84
	5280	88	90
	5320	88	90
802.11n(HT40)	5270	88	90
	5310	94	96
802.11ac(VHT20)	5260	86	88
	5280	94	92
	5320	94	96
802.11ac(VHT40)	5270	94	92
	5310	94	96
802.11ac(VHT80)	5290	80	82

U-NII-2C			
Mode	Frequency (MHz)	Parameters	
		Ant.1	Ant.2
802.11a	5500	96	78
	5580	84	80
	5700	80	92
	5720	80	92
802.11n(HT20)	5500	96	80
	5580	86	80
	5700	80	88
	5720	84	90
802.11n(HT40)	5510	96	80
	5550	96	80
	5670	80	94
	5710	80	94
802.11ac(VHT20)	5500	100	80
	5580	88	80
	5700	82	94
	5720	80	94
802.11ac(VHT40)	5510	96	80
	5550	88	84
	5670	80	94
	5710	80	94
802.11ac(VHT80)	5530	72	70
	5610	76	80
	5690	76	88

U-NII-3			
Mode	Frequency (MHz)	Parameters	
		Ant.1	Ant.2
802.11a	5745	102	106
	5785	108	114
	5825	106	110
802.11n(HT20)	5745	106	116
	5785	104	116
	5825	104	112
802.11n(HT40)	5755	106	116
	5795	102	112
802.11ac(VHT20)	5745	100	110
	5785	100	110
	5825	100	110
802.11ac(VHT40)	5755	92	102
	5795	90	96
802.11ac(VHT80)	5775	82	88
Note: 802.11n/ac Support MIMO.			

1.7 Measurement Uncertainty

The reported uncertainty of measurement y±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U_{Lab})
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	±3.50 dB ±3.10 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	±4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	±4.50 dB
Radiated Emission	Level Accuracy: Above 1000MHz	±4.20 dB

1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1/F.,Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)
The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01
The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.FCC Accredited Test Site Number: 854351. Designation Number: CN1223.

IC Registration No.: (11950A)
The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A. CAB identifier: CN0056.

2. Test Summary

Standard Section	Test Item	Test Sample(s)	Judgment	Remark
FCC 15.207(a)	Conducted Emission	HC-C-202406-0129-01-02	PASS	N/A
FCC 15.209 & 15.407(b)	Radiated Unwanted Emissions	HC-C-202406-0129-01-02	PASS	N/A
FCC 15.203	Antenna Requirement	HC-C-202406-0129-01-01	PASS	N/A
FCC 15.407(a)	-26dB Emission Bandwidth	HC-C-202406-0129-01-01	PASS	N/A
FCC 15.407(a)	99% Occupied Bandwidth	HC-C-202406-0129-01-01	PASS	N/A
FCC 15.407(e)	-6dB Min Emission Bandwidth	HC-C-202406-0129-01-01	PASS	N/A
FCC 15.407(a)	Maximum Conducted Output Power	HC-C-202406-0129-01-01	PASS	N/A
FCC 15.407(a)	Power Spectral Density	HC-C-202406-0129-01-01	PASS	N/A
FCC 15.407(b)& 15.205	Emissions in Restricted Bands	HC-C-202406-0129-01-02	PASS	N/A
FCC 15.407(b)&15.209	Conducted Unwanted Emissions	HC-C-202406-0129-01-01	PASS	N/A
FCC 15.407(g)	Frequency Stability	HC-C-202406-0129-01-01	PASS	N/A
/	On Time and Duty Cycle	HC-C-202406-0129-01-01	/	N/A

Note: N/A is an abbreviation for Not Applicable.

3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
Radiation Emission	EZ-EMC	EZ	FA-03A2RE+
RF Conducted Measurement	MTS-8310	MWRFtest	V2.0.0.0
RF Test System	JS1120	Tonscend	V3.2.22

4. Test Equipment and Test Site

Test Site				
No.	**Test Site**	**Manufacturer**	**Specification**	**Used**
TB-EMCSR001	Shielding Chamber #1	YIHENG	7.5*4.0*3.0 (m)	√
TB-EMCSR002	Shielding Chamber #2	YIHENG	8.0*4.0*3.0 (m)	√
TB-EMCCA001	3m Anechoic Chamber #A	ETS	9.0*6.0*6.0 (m)	X
TB-EMCCB002	3m Anechoic Chamber #B	YIHENG	9.0*6.0*6.0 (m)	√

Conducted Emission Test					
Equipment	**Manufacturer**	**Model No.**	**Serial No.**	**Last Cal.**	**Cal. Due Date**
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jun. 17, 2024	Jun. 16, 2025
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jun. 17, 2024	Jun. 16, 2025
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jun. 17, 2024	Jun. 16, 2025
LISN	Rohde & Schwarz	ENV216	101131	Jun. 17, 2024	Jun. 16, 2025
Radiation Emission Test(B Site)					
Equipment	**Manufacturer**	**Model No.**	**Serial No.**	**Last Cal.**	**Cal. Due Date**
Spectrum Analyzer	Agilent	N9020A	MY49100060	Aug. 30, 2023	Aug. 29, 2024
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 17, 2024	Jun. 16, 2025
EMI Test Receiver	Rohde & Schwarz	ESU-8	100472/008	Feb. 23, 2024	Feb.22, 2025
Bilog Antenna	SCHWARZBECK	VULB 9168	1225	Nov. 13, 2023	Nov. 12, 2025
Horn Antenna	SCHWARZBECK	BBHA 9120 D	2463	Jun. 14, 2024	Jun. 13, 2026
Horn Antenna	SCHWARZBECK	BBHA 9170	1118	Feb. 27, 2024	Feb.26, 2026
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jun. 14, 2024	Jun. 13, 2026
HF Amplifier	Tonscend	TAP9E6343	AP21C806117	Aug. 30, 2023	Aug. 29, 2024
HF Amplifier	Tonscend	TAP051845	AP21C806141	Aug. 30, 2023	Aug. 29, 2024
HF Amplifier	Tonscend	TAP0184050	AP21C806129	Aug. 30, 2023	Aug. 29, 2024
Pre-amplifier	HP	8449B	3008A00849	Feb. 23, 2024	Feb.22, 2025
Highpass Filter	CD	HPM-6.4/18G	---	N/A	N/A
Highpass Filter	CD	HPM-2.8/18G	---	N/A	N/A
Highpass Filter	XINBO	XBLBQ-HTA67(8-25G)	22052702-1	N/A	N/A
Antenna Conducted Emission					
Equipment	**Manufacturer**	**Model No.**	**Serial No.**	**Last Cal.**	**Cal. Due Date**
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 17, 2024	Jun. 16, 2025
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Aug. 30, 2023	Aug. 29, 2024
Spectrum Analyzer	KEYSIGHT	N9020B	MY60110172	Aug. 30, 2023	Aug. 29, 2024
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO26	Aug. 30, 2023	Aug. 29, 2024
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO29	Aug. 30, 2023	Aug. 29, 2024
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO31	Aug. 30, 2023	Aug. 29, 2024
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO33	Aug. 30, 2023	Aug. 29, 2024
RF Control Unit	Tonsced	JS0806-2	21F8060439	Aug. 30, 2023	Aug. 29, 2024
Power Control Box	Tonsced	JS0806-4ADC	21C8060387	N/A	N/A

5. Conducted Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard

FCC Part 15.207

5.1.2 Test Limit

Frequency	Maximum RF Line Voltage (dBμV)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:
(1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequencies.
(3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.2 Test Setup

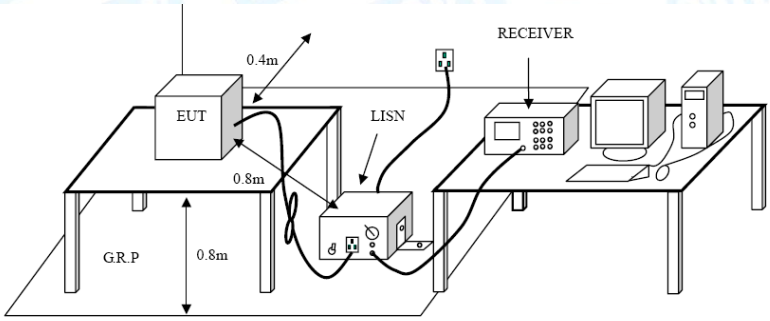

5.3 Test Procedure

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- The bandwidth of EMI test receiver is set at 9 kHz, and the test frequency band is from 0.15MHz to 30MHz.

5.4 Deviation From Test Standard

No deviation

5.5 EUT Operating Mode

Please refer to the description of test mode.

5.6 Test Data

Please refer to the Attachment A inside test report.

6. Radiated and Conducted Unwanted Emissions

6.1 Test Standard and Limit

6.1.1 Test Standard

FCC Part 15.209 & FCC Part 15.407(b)

6.1.2 Test Limit

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

General field strength limits at frequencies Below 30MHz		
Frequency (MHz)	**Field Strength (microvolt/meter)**	**Measurement Distance (meters)**
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
Note: 1, The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.		

General field strength limits at frequencies above 30 MHz		
Frequency (MHz)	**Field strength (μV/m at 3 m)**	**Measurement Distance (meters)**
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

General field strength limits at frequencies Above 1000MHz		
Frequency (MHz)	**Distance of 3m (dBuV/m)**	
	Peak	**Average**
Above 1000	74	54
Note: (1) The tighter limit applies at the band edges. (2) Emission Level(dBuV/m)=20log Emission Level(uV/m) (3) For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.		

Limits of unwanted emission out of the restricted bands

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBuV/m)
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27(Note 2)	68.3
	10(Note 2)	105.3
	15.6(Note 2)	110.9
	27(Note 2)	122.3

NOTE:
1, The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E=\frac{1000000\sqrt{30P}}{3}$$ uV/m, where P is the eirp (Watts)

2, According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.
3, For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

6.2 Test Setup

Radiated measurement

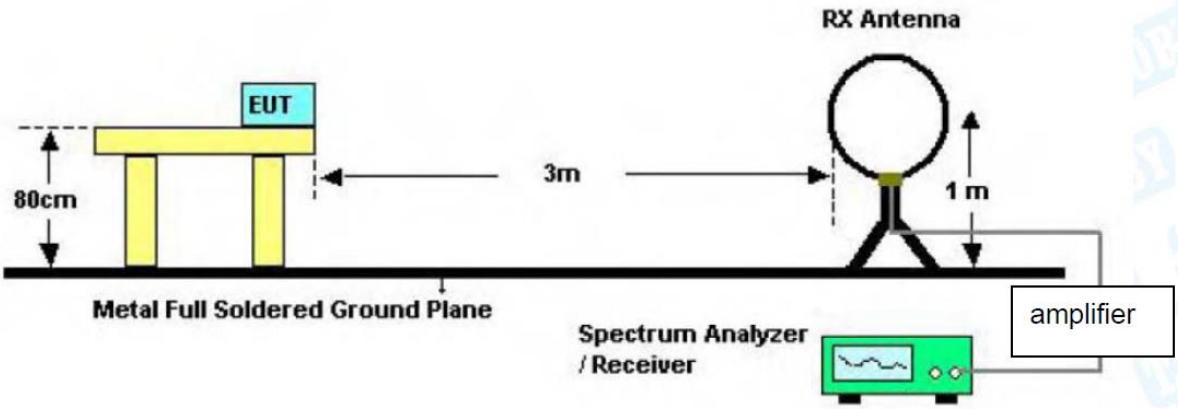

Below 30MHz Test Setup

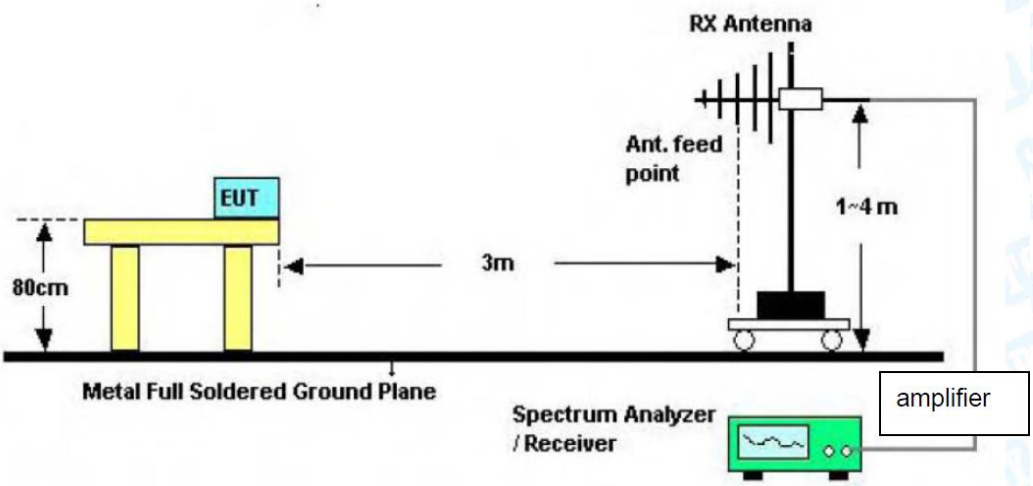

Below 1000MHz Test Setup

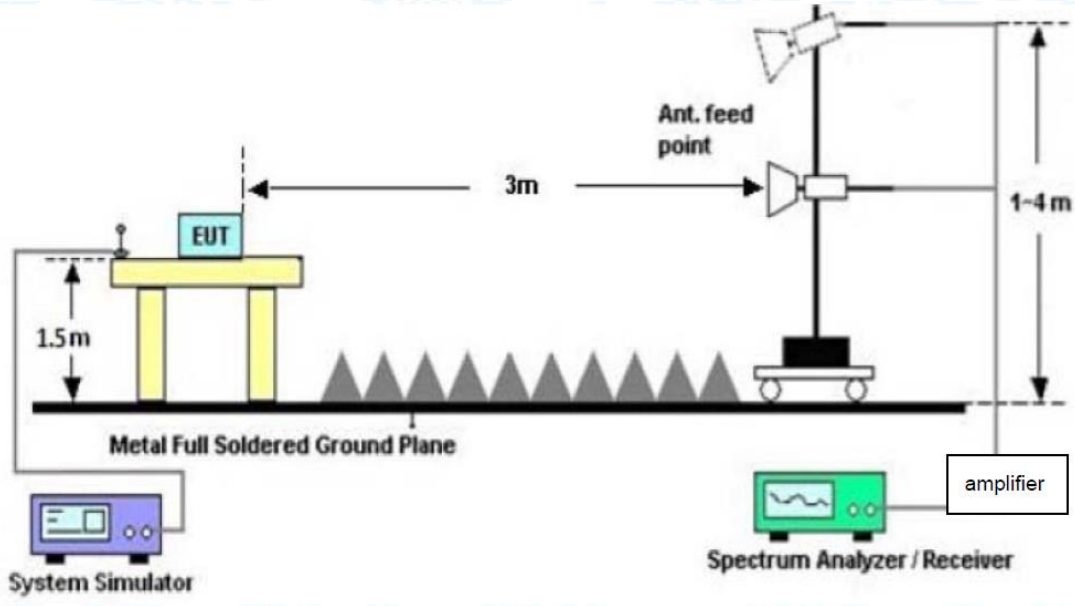

Above 1GHz Test Setup
Conducted measurement

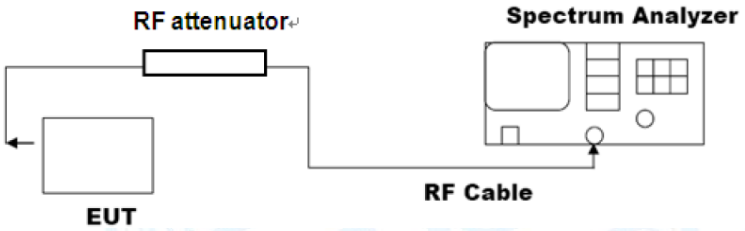

6.3 Test Procedure

---Radiated measurement

●The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.

● Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.

● The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.

●The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

●If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Below 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.

●Testing frequency range 30MHz-1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection. Testing frequency range 9KHz-150Hz the measuring instrument use VBW=200Hz with Quasi-peak detection. Testing frequency range 9KHz-30MHz the measuring instrument use VBW=9kHz with Quasi-peak detection.

●Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

●For the actual test configuration, please see the test setup photo.

--- Conducted measurement

●Reference level measurement

Establish a reference level by using the following procedure:
a) Set instrument center frequency to DTS channel center frequency.
b) Set the span to≥1.5 times the DTS bandwidth.
c) Set the RBW = 100 kHz.
d) Set the VBW≥[3*RBW].
e) Detector = peak.
f) Sweep time = auto couple.
g) Trace mode = max hold.
h) Allow trace to fully stabilize.
i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

●Emission level measurement

Establish an emission level by using the following procedure:
a) Set the center frequency and span to encompass frequency range to be measured.
b) Set the RBW = 100 kHz.
c) Set the VBW≥[3*RBW].
d) Detector = peak.
e) Sweep time = auto couple.
f) Trace mode = max hold.
g) Allow trace to fully stabilize.
h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

6.4 Deviation From Test Standard

No deviation

6.5 EUT Operating Mode

Please refer to the description of test mode.

6.6 Test Data

Radiated measurement please refer to the Attachment B inside test report.

Conducted measurement please refer to the external appendix report of 5G Wi-Fi.

7. Restricted Bands Requirement

7.1 Test Standard and Limit

7.1.1 Test Standard

FCC Part 15.205 & FCC Part 15.407(b)

7.1.2 Test Limit

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBuV/m)
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27(Note 2)	68.3
	10(Note 2)	105.3
	15.6(Note 2)	110.9
	27(Note 2)	122.3

NOTE:

1, The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

E= $\frac{1000000\sqrt{30P}}{3}$ uV/m, where P is the eirp (Watts)

2, According to FCC 16-24,All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

Note: According the ANSI C63.10 11.12.2 antenna-port conducted measurements may also be used as an alternative to radiated measurements for determining compliance in the restricted frequency bands requirements. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test forcabinet/case emissions is required.

7.2 Test Setup

Radiated measurement

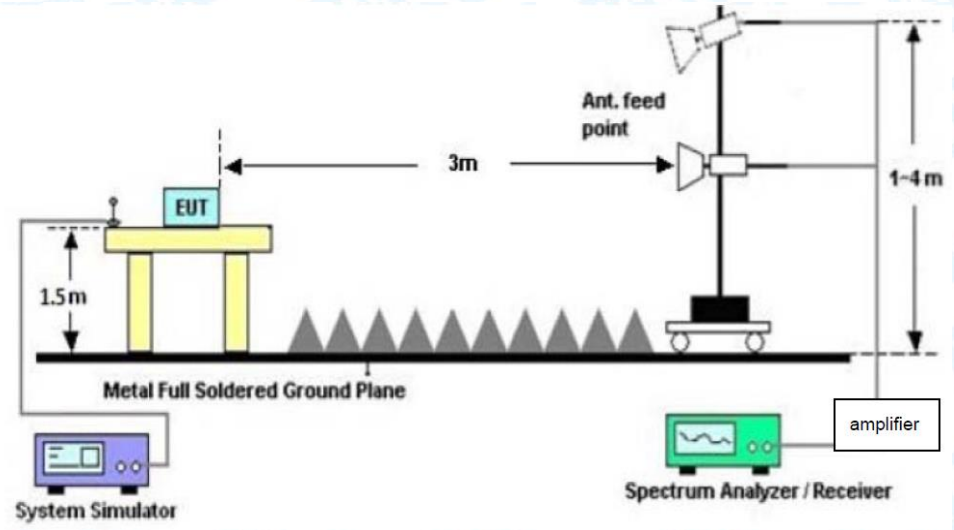

Conducted measurement

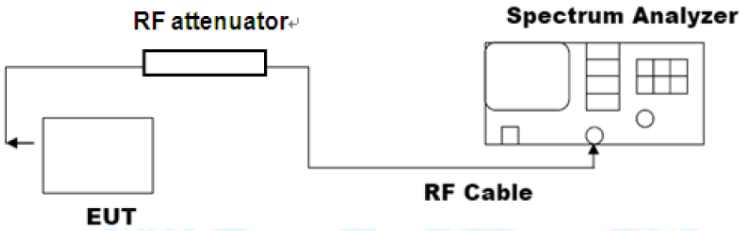

7.3 Test Procedure

---Radiated measurement

● Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.

● The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.

●The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

●The Peak Value and average value both need to comply with applicable limit above 1 GHz.

●Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

●For the actual test configuration, please see the test setup photo.

--- Conducted measurement

a) Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 11.12.2.3 through 11.12.2.5 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP (see 11.12.2.6 for guidance on determining the applicable antenna gain).
c) Add the appropriate maximum ground reflection factor to the EIRP (6 dB for frequencies≤30 MHz; 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive; and 0 dB for frequencies > 1000 MHz).
d) For MIMO devices, measure the power of each chain and sum the EIRP of all chains in linear terms (i.e., watts and mW).
e) Convert the resultant EIRP to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log d + 104.8$$

where
E is the electric field strength in dBuV/m
EIRP is the equivalent isotropically radiated power in dBm
d is the specified measurement distance in m
f) Compare the resultant electric field strength level with the applicable regulatory limit.
g) Perform the radiated spurious emission test.

7.4 Deviation From Test Standard

No deviation

7.5 EUT Operating Mode

Please refer to the description of test mode.

7.6 Test Data

Please refer to the Attachment C inside test report.

8. Bandwidth Test

8.1 Test Standard and Limit

8.1.1 Test Standard

FCC Part 15.407(a) & FCC Part 15.407(e)

8.1.2 Test Limit

Test Item	Limit	Frequency Range (MHz)
26 Bandwidth	N/A	5150~5250
		5250~5350
		5500~5725
6 dB Bandwidth	>500kHz	5725~5850
99% Bandwidth	N/A	5150~5250
		5250~5350
		5500~5725
		5725~5850

8.2 Test Setup

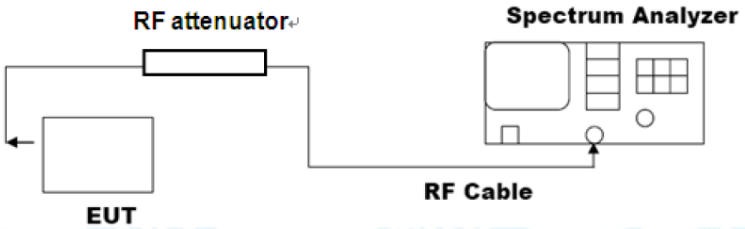

8.3 Test Procedure

---Emission bandwidth

●The procedure for this method is as follows:
a) Set RBW = approximately 1% of the emission bandwidth.
b) Set the VBW > RBW.
c) Detector = peak.
d) Trace mode = max hold.
e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
NOTE—The automatic bandwidth measurement capability of a spectrum analyzer or an EMI receiver may be employed if it implements the functionality described in the preceding items.

---DTS bandwidth

●The steps for the first option are as follows:

a) Set RBW = 100 kHz.
b) Set the VBW≥[3*RBW].
c) Detector = peak.
d) Trace mode = max hold.

e) Sweep = auto couple.
f) Allow the trace to stabilize.
g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

---occupied bandwidth

● The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2.
d) Step a) through step c) might require iteration to adjust within the specified range.
e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

8.4 Deviation From Test Standard

No deviation

8.5 EUT Operating Mode

Please refer to the description of test mode.

8.6 Test Data

Please refer to the external appendix report of 5G Wi-Fi.

9. Maximum Conducted Output Power

9.1 Test Standard and Limit

9.1.1 Test Standard

FCC Part 15.407(a)

9.1.2 Test Limit

<table>
<tr><th colspan="5">FCC Part 15 Subpart E(15.407)</th></tr>
<tr><th rowspan="2">Limit</th><th colspan="4">Frequency Range(MHz)</th></tr>
<tr><th>5150~5250</th><th>5250~5350</th><th>5500~5725</th><th>5725~5850</th></tr>
<tr><td>Max Conducted TX Power</td><td>Master Device: 1 Watt(30dBm) Client Device: 250mW(24dBm)</td><td colspan="2">24dBm (250 mW) or 11 dBm+ 10 log B, whichever is lower (B= 26-dB emission BW)</td><td>1 Watt (30dBm)</td></tr>
<tr><td rowspan="3">Max E.I.R.P</td><td>4 W (36 dBm) with 6 dBi antenna</td><td colspan="2" rowspan="3">1 W (30 dBm) with 6 dBi antenna</td><td rowspan="3">4 W (36 dBm) with 6 dBi antenna</td></tr>
<tr><td>200 W (53 dBm) for fixed P-t-P application with 23 dBiantenna</td></tr>
<tr><td>Additional rule for outdoor operation: Max_EIRP< 125 mW(21 dBm) at any elevation angle > 30°from horizon</td></tr>
<tr><td rowspan="2">TPC</td><td rowspan="2">NO</td><td colspan="2">YES, if Max_EIRP ≥ 500 mW (27 dBm) and able to lower EIRP below 24dBm</td><td rowspan="2">NO</td></tr>
<tr><td colspan="2">NO, if Max_EIRP < 500mW (27dBm)</td></tr>
</table>

9.2 Test Setup



9.3 Test Procedure

●The EUT was connected to RF power meter via a broadband power sensor as show the block above. The power sensor video bandwidth is greater than or equal to the DTS bandwidth of the equipment. For straddle channels power test with spectrum analyser.

9.4 Deviation From Test Standard

No deviation

9.5 EUT Operating Mode

Please refer to the description of test mode.

9.6 Test Data

Please refer to the external appendix report of 5G Wi-Fi.

10. Power Spectral Density Test

10.1 Test Standard and Limit

10.1.1 Test Standard

FCC Part 15.407(a)

10.1.2 Test Limit

Test Item	Limit		Frequency Range(MHz)
Power Spectral Density	FCC	Master Device: 17dBm/MHz Client Device: 11dBm/MHz	5150~5250
	11dBm/MHz		5250~5350
	11dBm/MHz		5500~5725
	30dBm/500kHz		5725~5850

10.2 Test Setup

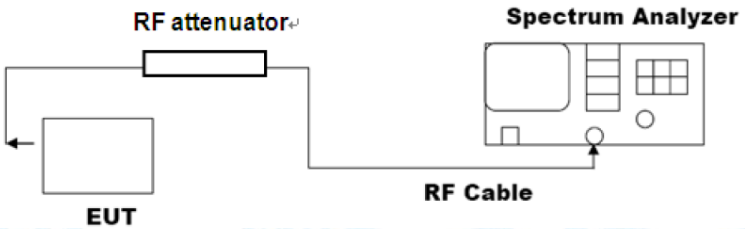

10.3 Test Procedure

●Notwithstanding that some regulatory requirements refer to peak power spectral density (PPSD), in some cases the intent is to measure the maximum value of the time average of the power spectral density during a period of continuous transmission. The procedure for this method is as follows:

a) Create an average power spectrum for the EUT operating mode being tested by following the instructions in 12.3.2 for measuring maximum conducted output power using a spectrum analyzer or EMI receiver; that is, select the appropriate test method (SA-1, SA-2, SA-3, or their respective alternatives) and apply it up to, but not including, the step labeled, "Compute power…."(This procedure is required even if the maximum conducted output power measurement was performed using the power meter method PM.)

b) Use the peak search function on the instrument to find the peak of the spectrum.

c) Make the following adjustments to the peak value of the spectrum, if applicable:

1) If method SA-2 or SA-2A was used, then add [10 log (1 / D)], where D is the duty cycle, to the peak of the spectrum.

2) If method SA-3A was used and the linear mode was used in step h) of 12.3.2.7, add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.

d) The result is the PPSD.
e) The procedure in item a) through item c) requires the use of 1 MHz resolution bandwidth to satisfy the 1 MHz measurement bandwidth specified by some regulatory authorities.95 This requirement also permits use of resolution bandwidths less than 1 MHz"provided that the measured power is integrated to show the total power over the measurement bandwidth"(i.e., 1 MHz). If measurements are performed using a reduced resolution bandwidth and integrated over 1 MHz bandwidth, the following adjustments to the procedures apply:
1) Set RBW≥1 / T, where T is defined in 12.2 a).
2) Set VBW ≥ [3*RBW].
3) Care shall be taken such that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

10.4 Deviation From Test Standard

No deviation

10.5 Antenna Connected Construction

Please refer to the description of test mode.

10.6 Test Data

Please refer to the external appendix report of 5G Wi-Fi.

11. Frequency Stability

11.1 Test Standard and Limit

11.1.1 Test Standard

FCC Part 15.407(g)

11.1.2 Test Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

11.2 Test Setup

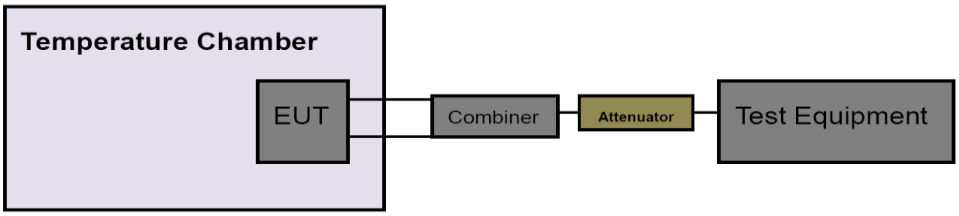

11.3 Test Procedure

Frequency stability with respect to ambient temperature

a) Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn ON the EUT and tune it to one of the number of frequencies shown in 5.6.

b) Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away), or by connecting a dummy load to the measuring instrument, through an attenuator if necessary.

NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.

c) Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).

d) Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.

e) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.

f) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

g) Measure the frequency at each of frequencies specified in 5.6.

h) Switch OFF the EUT but do not switch OFF the oscillator heater.

i) Lower the chamber temperature by not more that 10℃, and allow the temperature inside the chamber to stabilize.

j) Repeat step f) through step i) down to the lowest specified temperature.

Frequency stability when varying supply voltage

Unless otherwise specified, these tests shall be made at ambient room temperature (+15℃to +25℃). An antenna shall be connected to the antenna output terminals of the EUT if possible. If the EUT is equipped with or uses an adjustable-length antenna, then it shall be fully extended.

a) Supply the EUT with nominal voltage or install a new or fully charged battery in the EUT. Turn ON the EUT and couple its output to a frequency counter or other frequency-measuring instrument.

NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.

b) Tune the EUT to one of the number of frequencies required in 5.6. Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).

c) Measure the frequency at each of the frequencies specified in 5.6.

d) Repeat the above procedure at 85% and 115% of the nominal supply voltage as described in 5.13.

11.4 Deviation From Test Standard

No deviation

11.5 Antenna Connected Construction

Please refer to the description of test mode.

11.6 Test Data

Please refer to the external appendix report of 5G Wi-Fi.

12. Antenna Requirement

12.1 Test Standard and Limit

12.1.1 Test Standard

FCC Part 15.203

12.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

12.2 Deviation From Test Standard

No deviation

12.3 Antenna Connected Construction

The Max. gains of the antenna used for transmitting is 4.66dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

12.4 Test Data

The EUT antenna is a metal Antenna. It complies with the standard requirement.

Antenna Type
☒Permanent attached antenna
☐Unique connector antenna
☐Professional installation antenna

Attachment A-- Conducted Emission Test Data

Test Voltage:	AC 120V/60Hz
Terminal:	Line
Test Mode:	Mode 1
Remark:	Only worse case is reported.

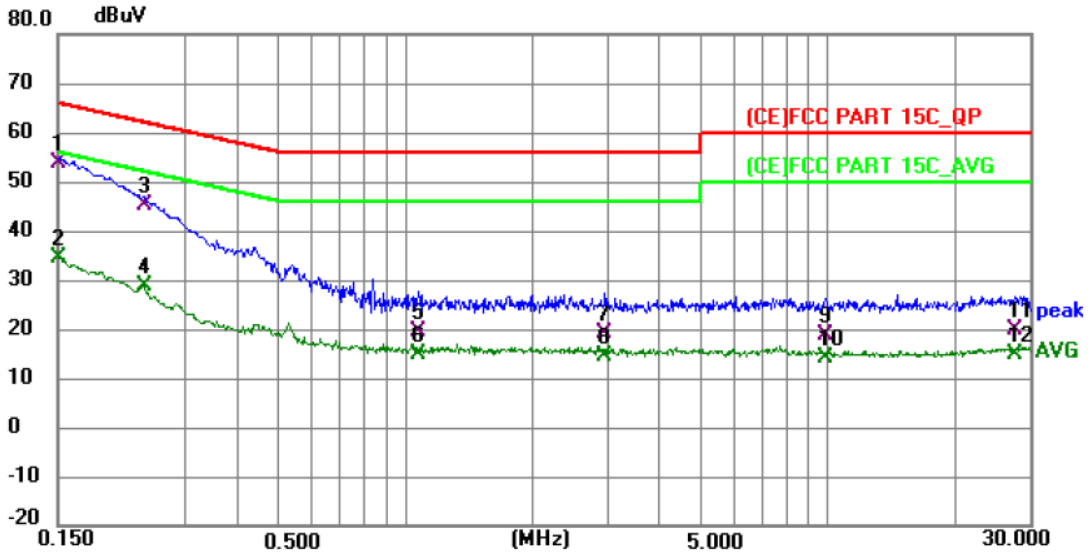

Temperature: 24.5 ℃ Humidity: 48 %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.1500	44.05	9.62	53.67	66.00	-12.33	QP
2		0.1500	24.75	9.62	34.37	56.00	-21.63	AVG
3		0.2400	35.77	9.50	45.27	62.10	-16.83	QP
4		0.2400	19.32	9.50	28.82	52.10	-23.28	AVG
5		1.0725	10.01	9.61	19.62	56.00	-36.38	QP
6		1.0725	5.28	9.61	14.89	46.00	-31.11	AVG
7		2.9714	9.37	9.58	18.95	56.00	-37.05	QP
8		2.9714	4.88	9.58	14.46	46.00	-31.54	AVG
9		9.8925	9.24	9.61	18.85	60.00	-41.15	QP
10		9.8925	4.62	9.61	14.23	50.00	-35.77	AVG
11		27.8384	9.34	10.35	19.69	60.00	-40.31	QP
12		27.8384	4.61	10.35	14.96	50.00	-35.04	AVG

Remark:
1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) =QuasiPeak/Average (dBuV)-Limit (dBuV)

Test Voltage:	AC 120V/60Hz
Terminal:	Neutral
Test Mode:	Mode 1
Remark:	Only worse case is reported.

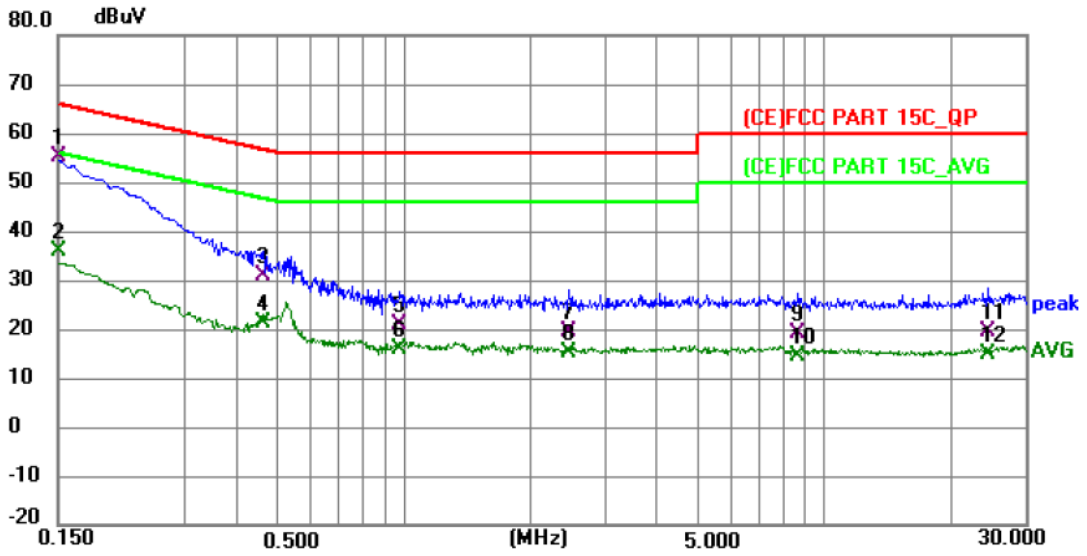

Temperature: 24.5 ℃ Humidity: 48 %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.1500	45.70	9.56	55.26	66.00	-10.74	QP
2		0.1500	26.29	9.56	35.85	56.00	-20.15	AVG
3		0.4605	21.35	9.46	30.81	56.68	-25.87	QP
4		0.4605	11.72	9.46	21.18	46.68	-25.50	AVG
5		0.9780	11.36	9.47	20.83	56.00	-35.17	QP
6		0.9780	6.55	9.47	16.02	46.00	-29.98	AVG
7		2.4630	9.89	9.56	19.45	56.00	-36.55	QP
8		2.4630	5.45	9.56	15.01	46.00	-30.99	AVG
9		8.6775	9.64	9.54	19.18	60.00	-40.82	QP
10		8.6775	4.85	9.54	14.39	50.00	-35.61	AVG
11		24.6525	9.00	10.42	19.42	60.00	-40.58	QP
12		24.6525	4.36	10.42	14.78	50.00	-35.22	AVG

Remark:
1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) =QuasiPeak/Average (dBuV)-Limit (dBuV)

Attachment B--Unwanted Emissions Data

---Radiated Unwanted Emissions

9 KHz~30 MHz

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB Below the permissible value has no need to be reported.

30MHz~1GHz

Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	Mode 1
Remark:	Only worse case is reported.

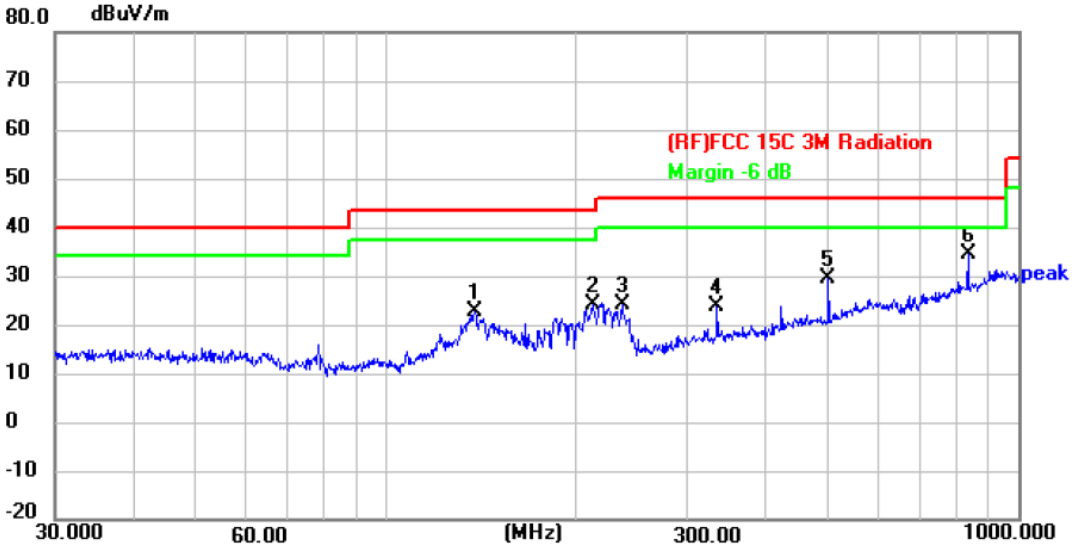

Temperature: 23.8 ℃ Humidity: 47 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	138.3873	45.52	-22.81	22.71	43.50	-20.79	peak	P
2	212.2693	48.31	-24.36	23.95	43.50	-19.55	peak	P
3	236.6447	48.19	-24.03	24.16	46.00	-21.84	peak	P
4	333.6865	44.25	-20.57	23.68	46.00	-22.32	peak	P
5	501.1790	46.36	-16.93	29.43	46.00	-16.57	peak	P
6 *	833.3170	44.49	-9.97	34.52	46.00	-11.48	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	Mode 1
Remark:	Only worse case is reported.

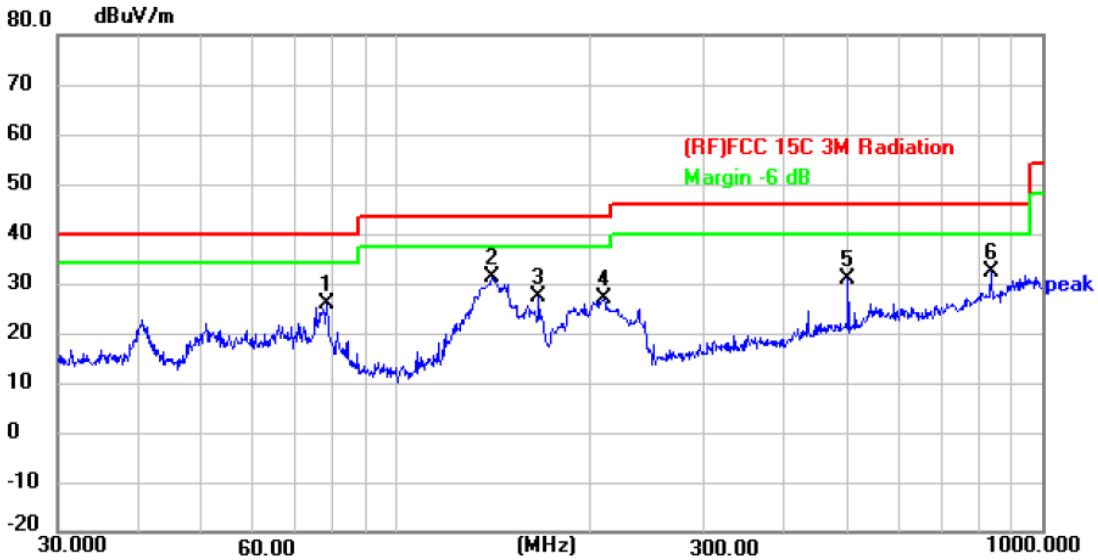

Temperature: 23.8 ℃ Humidity: 47 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	78.1388	52.72	-27.00	25.72	40.00	-14.28	peak	P
2 *	141.3296	53.23	-22.04	31.19	43.50	-12.31	peak	P
3	166.6513	49.48	-22.12	27.36	43.50	-16.14	peak	P
4	210.0481	50.95	-24.12	26.83	43.50	-16.67	peak	P
5	501.1790	47.80	-16.93	30.87	46.00	-15.13	peak	P
6	833.3171	42.24	-9.97	32.27	46.00	-13.73	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Above 1GHz

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5180MHz-SISO-ANT.1

Horizontal

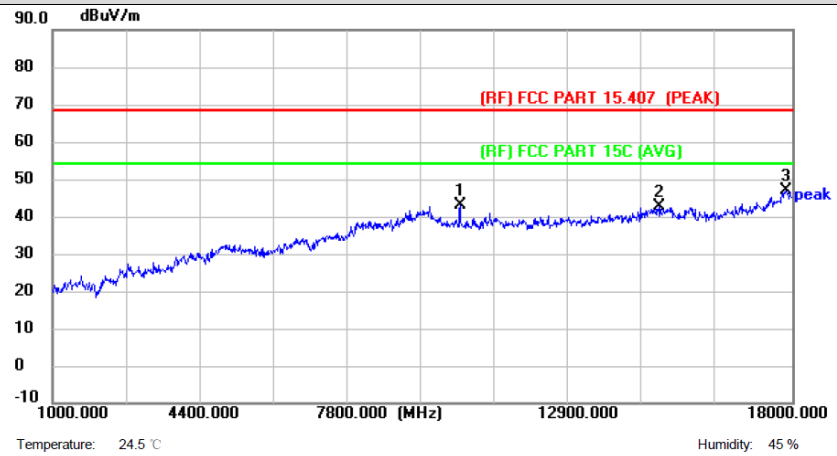

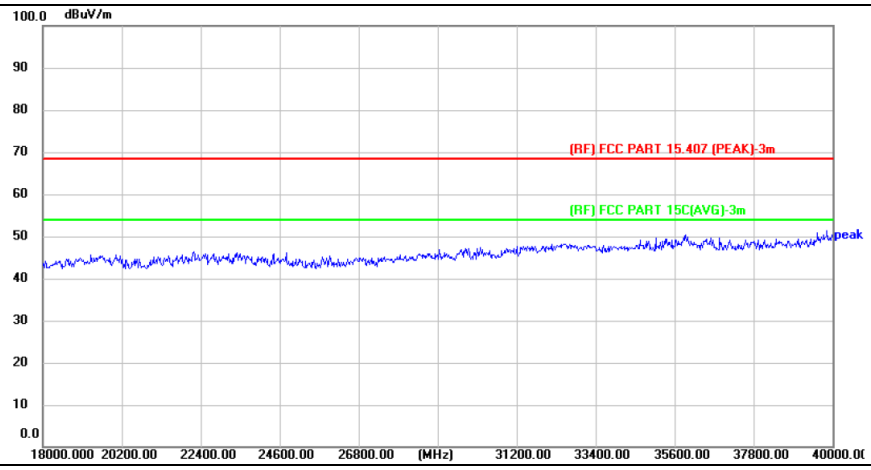

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10367.000	44.61	-1.47	43.14	68.30	-25.16	peak	P
2	14940.000	38.65	3.92	42.57	68.30	-25.73	peak	P
3 *	17847.000	38.27	8.54	46.81	68.30	-21.49	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5180MHz-SISO-ANT.1

Vertical

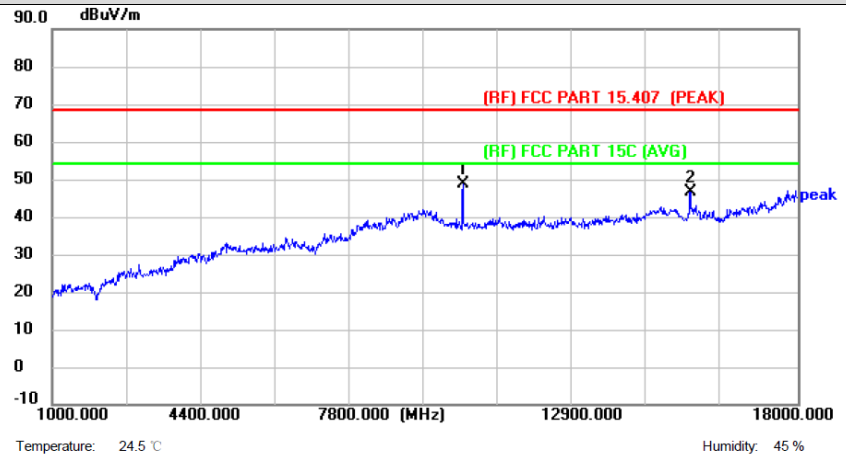

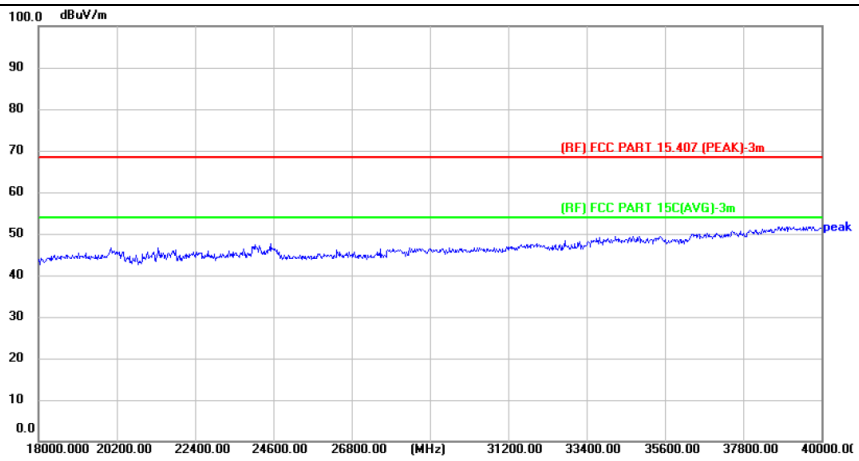

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10367.000	50.17	-1.47	48.70	68.30	-19.60	peak	P
2	15552.000	42.76	3.89	46.65	68.30	-21.65	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5200MHz-SISO-ANT.1

Horizontal

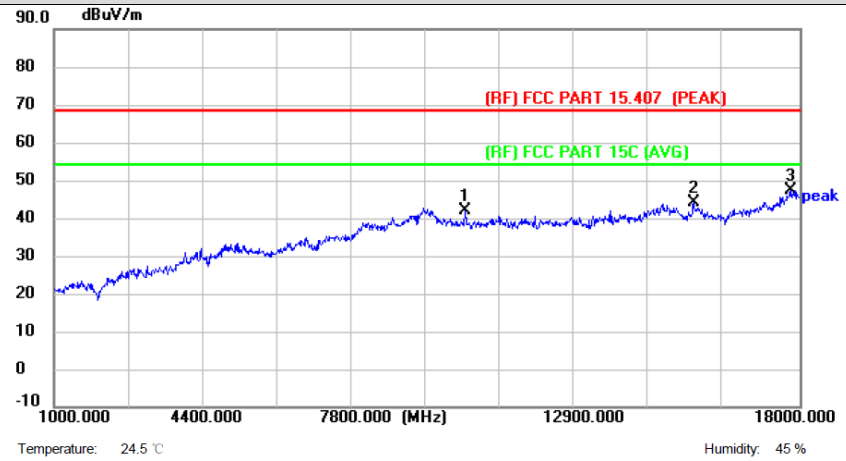

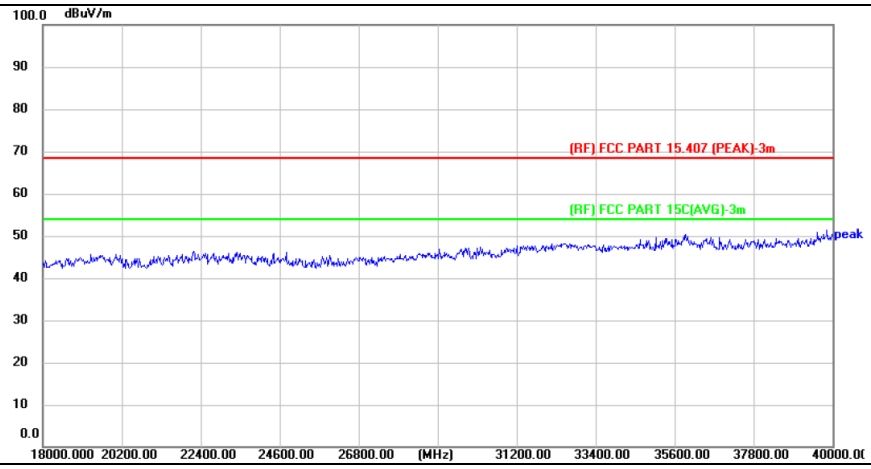

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10384.000	43.37	-1.49	41.88	68.30	-26.42	peak	P
2	15586.000	39.79	4.18	43.97	68.30	-24.33	peak	P
3 *	17813.000	38.67	8.61	47.28	68.30	-21.02	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5200MHz-SISO-ANT.1

Vertical

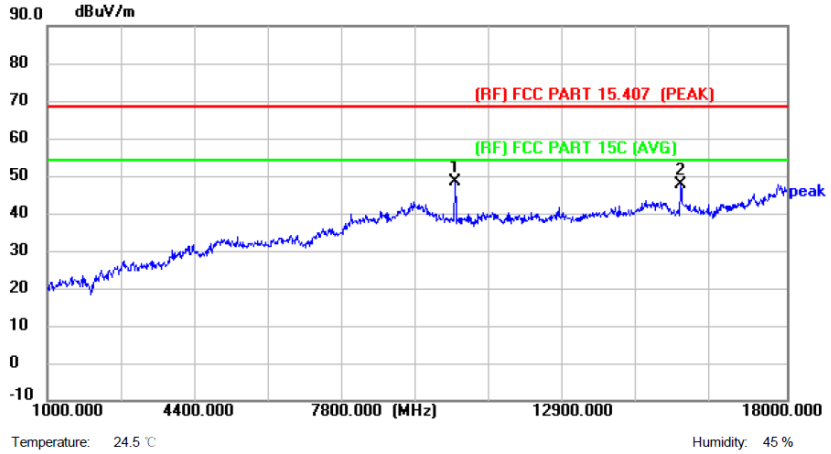

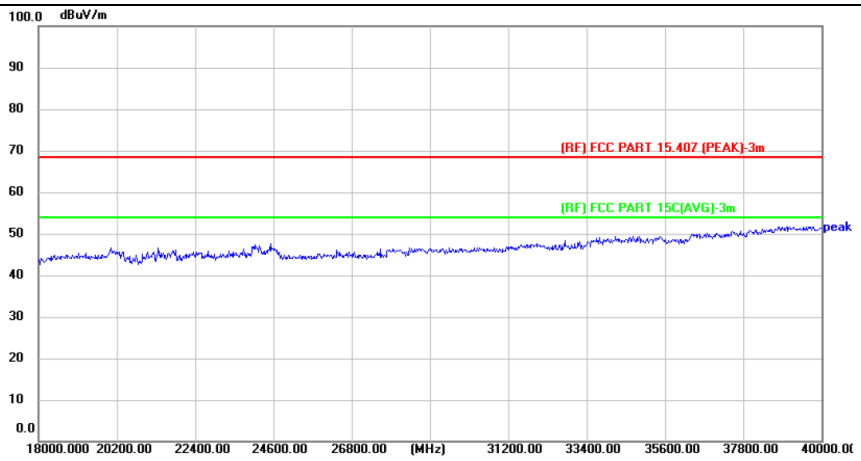

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10384.000	49.82	-1.49	48.33	68.30	-19.97	peak	P
2	15569.000	43.61	4.04	47.65	68.30	-20.65	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5240MHz-SISO-ANT.1

Horizontal

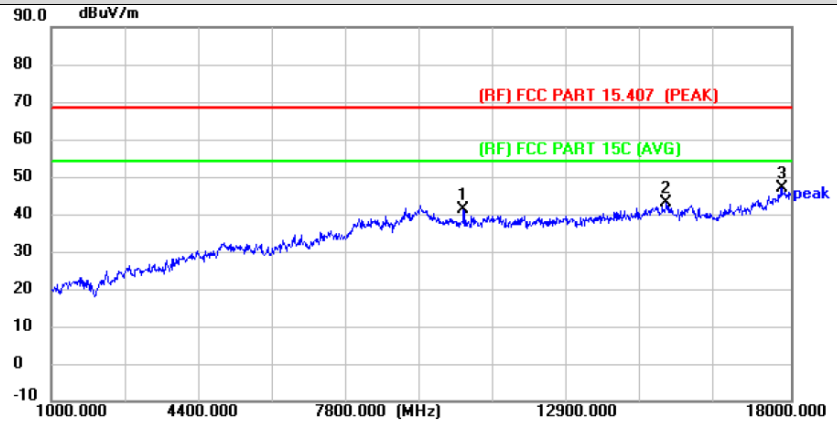

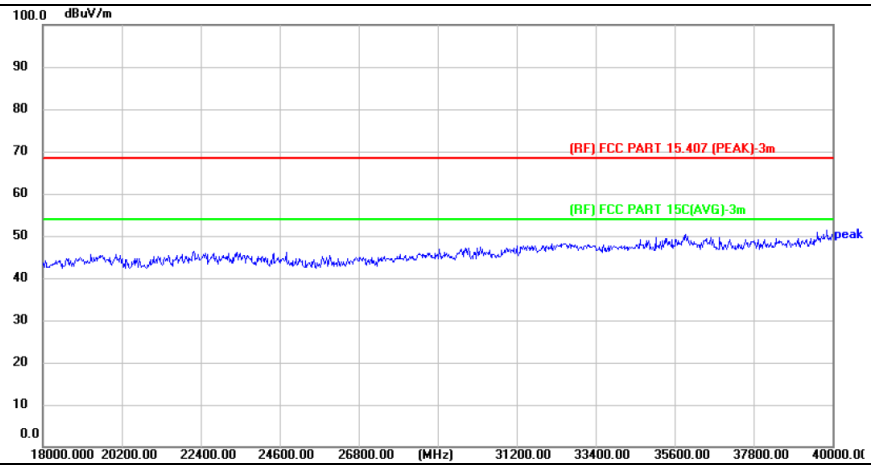

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10469.000	42.69	-1.57	41.12	68.30	-27.18	peak	P
2	15144.000	39.07	3.86	42.93	68.30	-25.37	peak	P
3 *	17796.000	38.32	8.58	46.90	68.30	-21.40	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5240MHz-SISO-ANT.1

Vertical

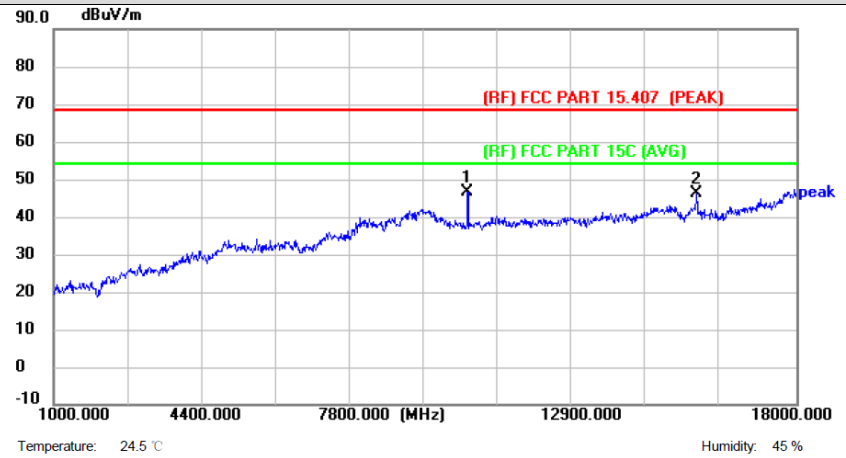

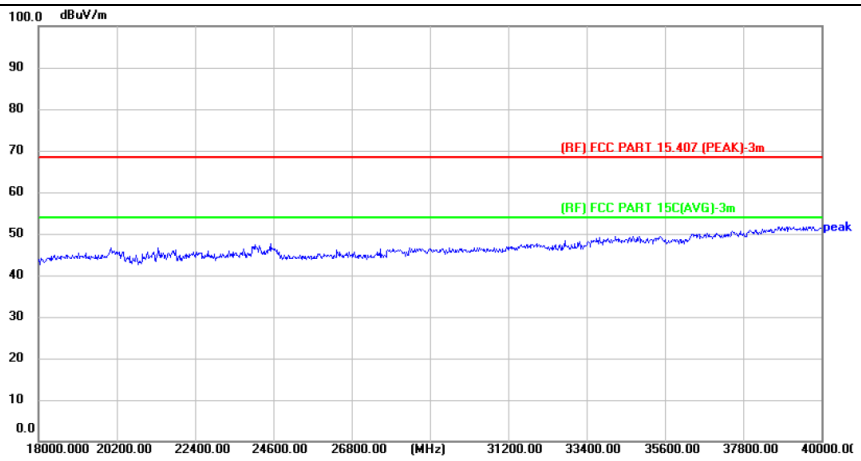

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10469.000	48.22	-1.57	46.65	68.30	-21.65	peak	P
2	15722.000	41.69	4.55	46.24	68.30	-22.06	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5260MHz-SISO-ANT.1

Horizontal

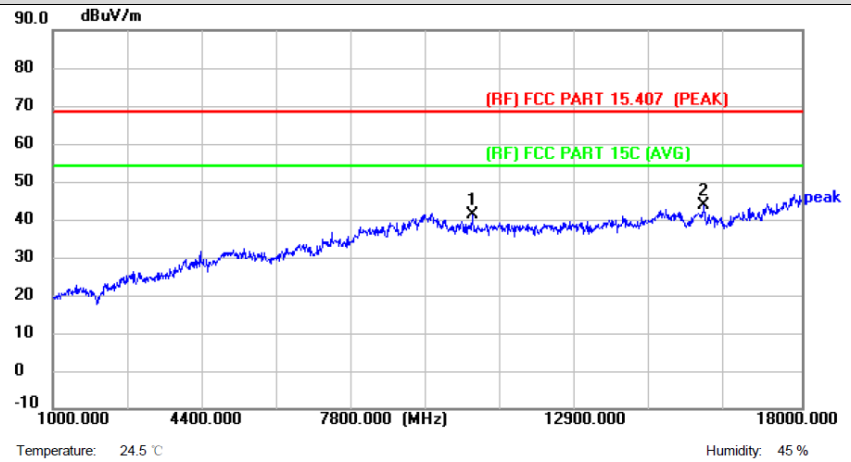

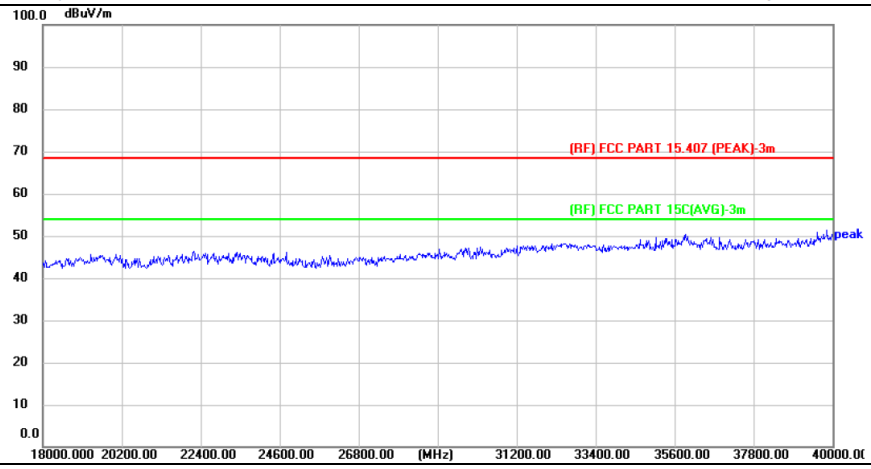

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10520.000	42.77	-1.53	41.24	68.30	-27.06	peak	P
2 *	15790.000	39.80	4.12	43.92	68.30	-24.38	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5260MHz-SISO-ANT.1

Vertical

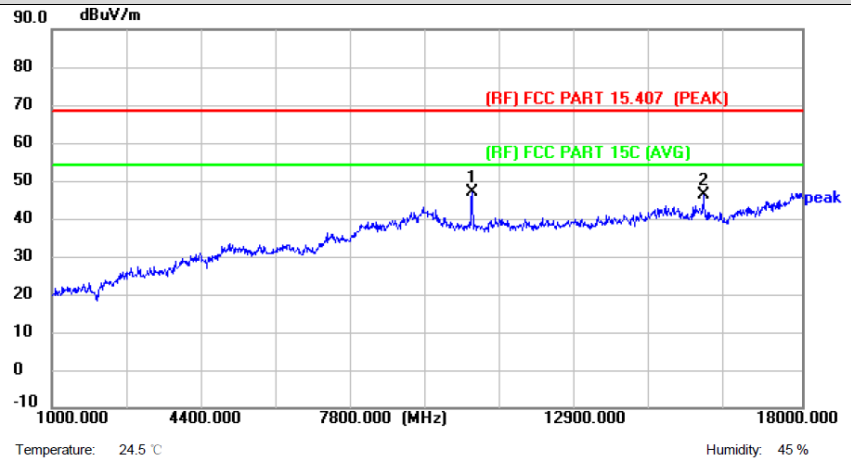

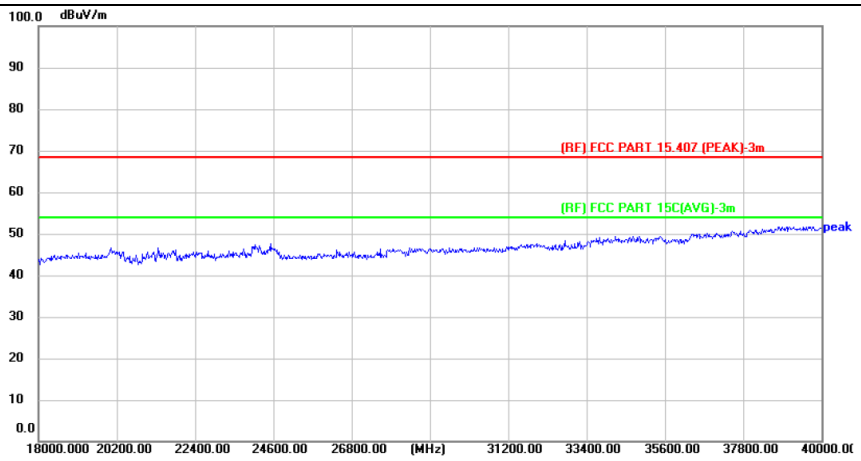

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10520.000	48.51	-1.53	46.98	68.30	-21.32	peak	P
2	15773.000	41.89	4.23	46.12	68.30	-22.18	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5280MHz-SISO-ANT.1

Horizontal

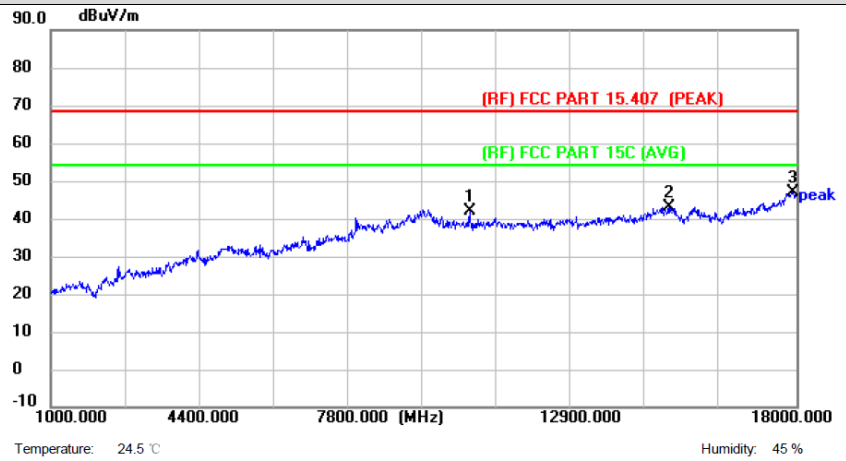

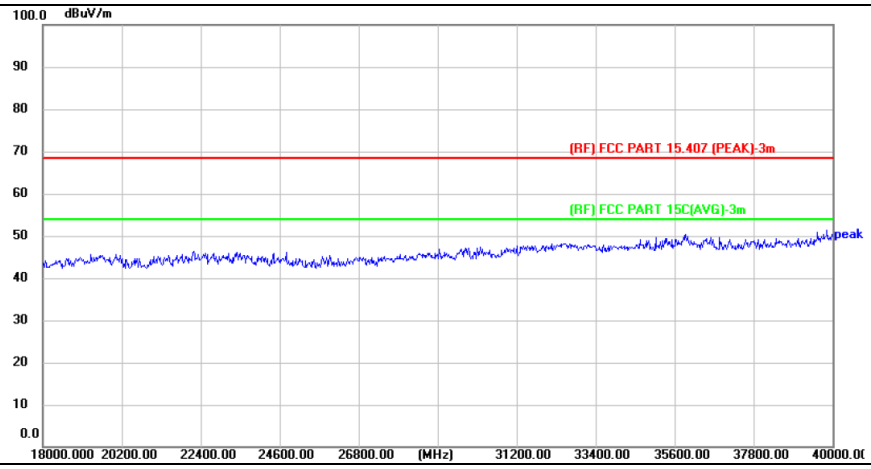

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10554.000	43.37	-1.42	41.95	68.30	-26.35	peak	P
2	15110.000	39.35	3.76	43.11	68.30	-25.19	peak	P
3 *	17915.000	38.46	8.50	46.96	68.30	-21.34	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5280MHz-SISO-ANT.1

Vertical

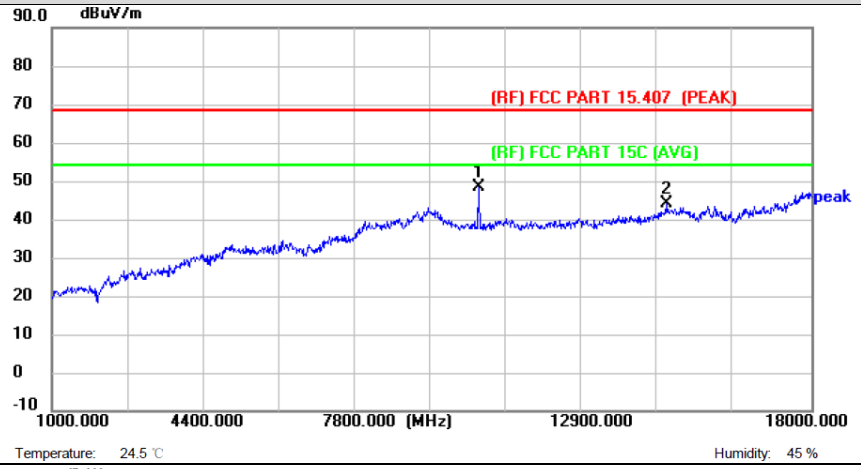

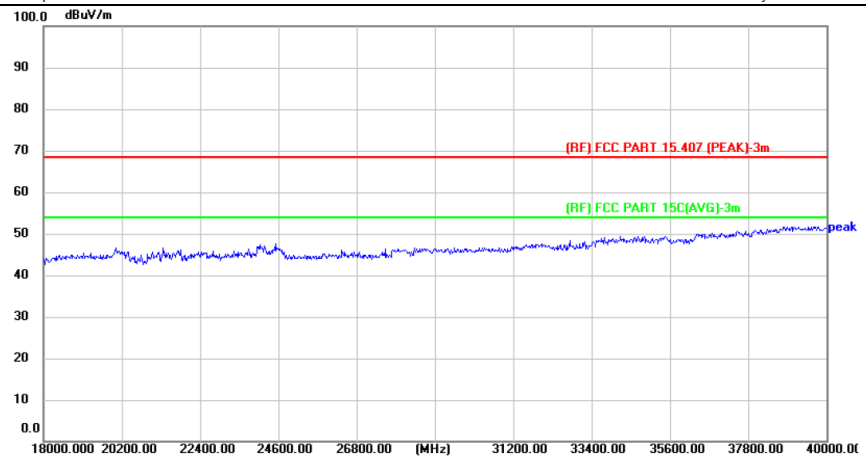

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10554.000	49.74	-1.42	48.32	68.30	-19.98	peak	P
2	14753.000	40.44	3.59	44.03	68.30	-24.27	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5320MHz-SISO-ANT.1

Horizontal

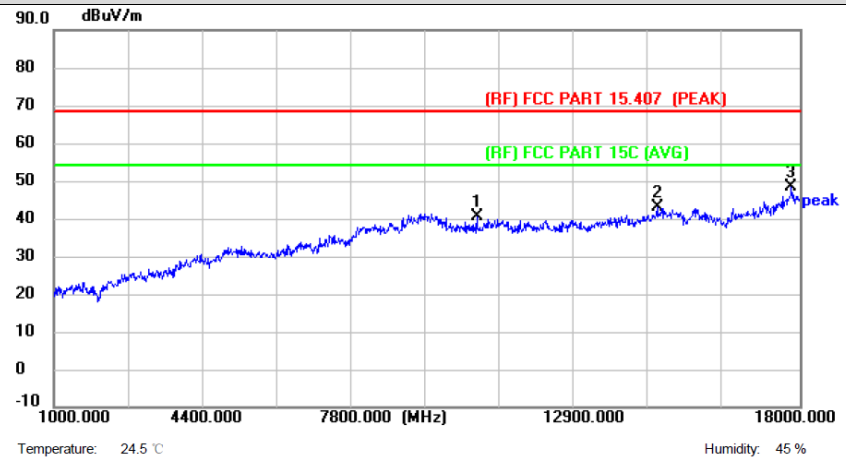

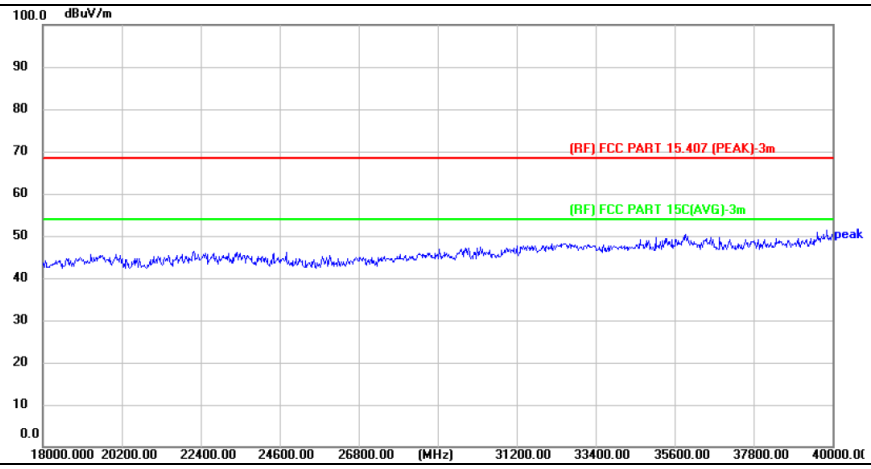

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10639.000	41.77	-1.33	40.44	68.30	-27.86	peak	P
2	14753.000	39.33	3.59	42.92	68.30	-25.38	peak	P
3 *	17813.000	39.79	8.61	48.40	68.30	-19.90	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5320MHz-SISO-ANT.1

Vertical

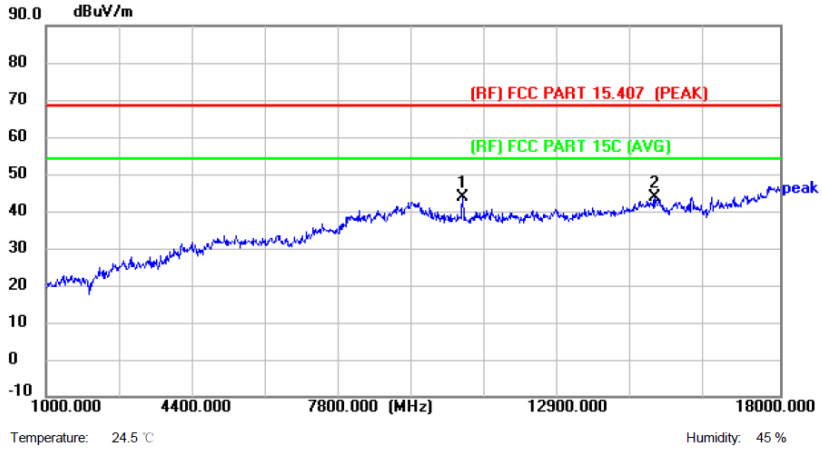

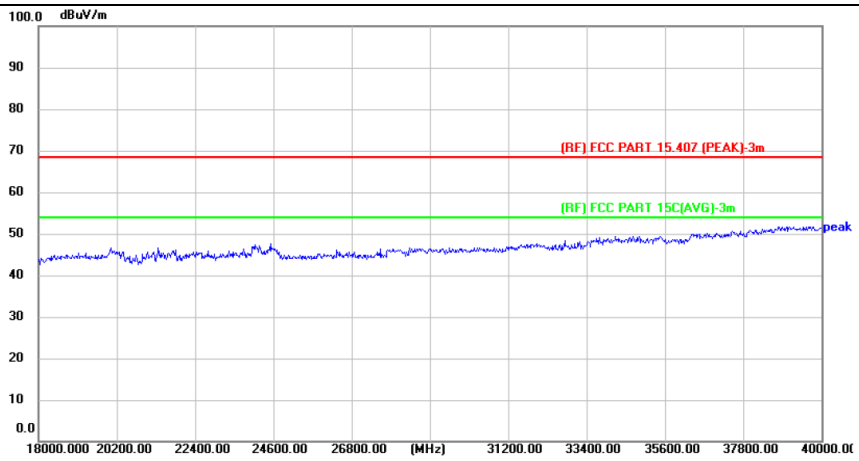

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10639.000	44.98	-1.33	43.65	68.30	-24.65	peak	P
2	15093.000	39.92	3.73	43.65	68.30	-24.65	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5500MHz-SISO-ANT.1

Horizontal

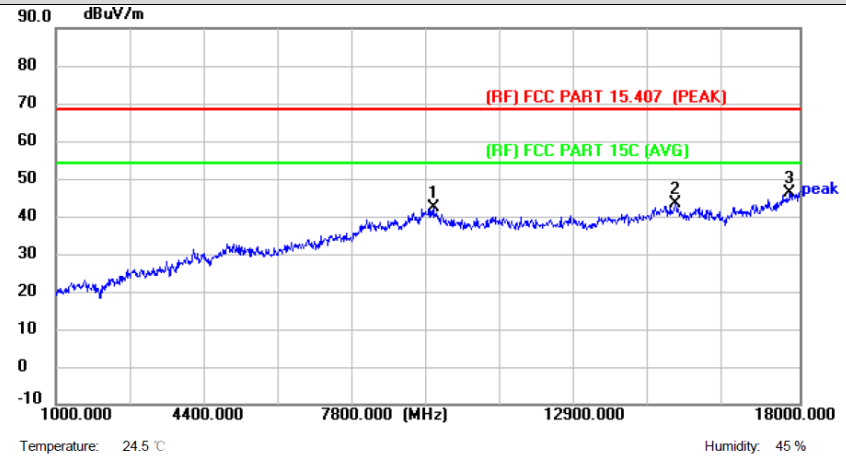

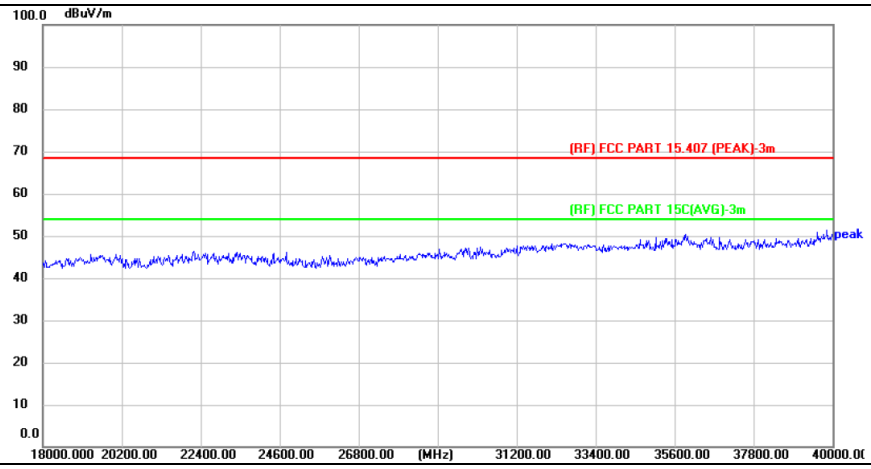

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9636.000	42.75	-0.58	42.17	68.30	-26.13	peak	P
2	15161.000	39.41	3.90	43.31	68.30	-24.99	peak	P
3 *	17779.000	37.90	8.35	46.25	68.30	-22.05	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5500MHz-SISO-ANT.1

Vertical

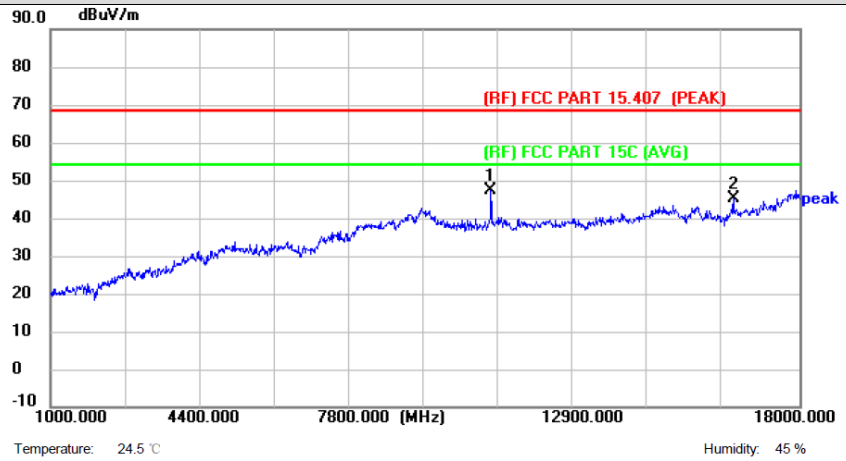

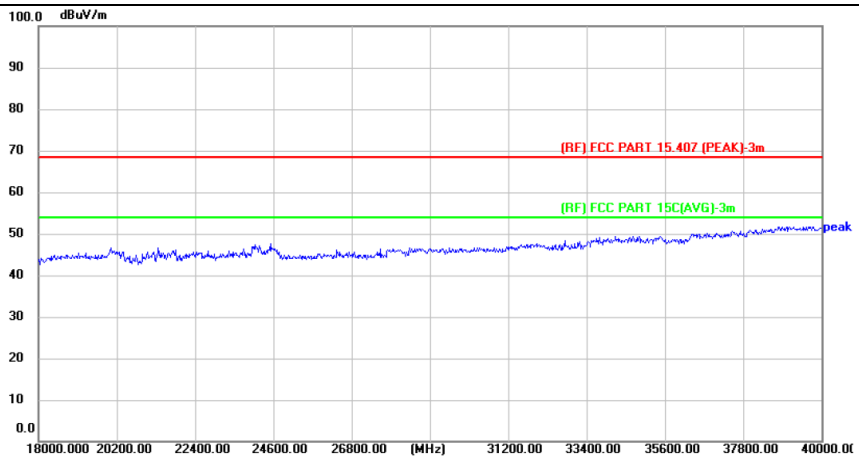

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10996.000	47.65	-0.26	47.39	68.30	-20.91	peak	P
2	16504.000	40.55	4.55	45.10	68.30	-23.20	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5580MHz-SISO-ANT.1

Horizontal

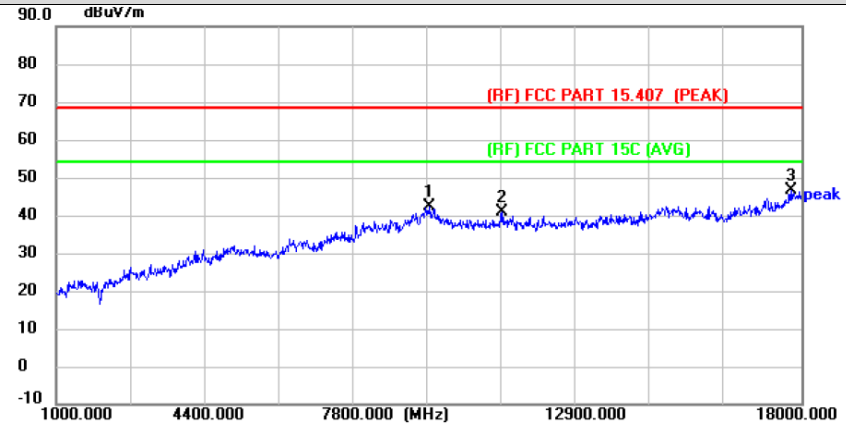

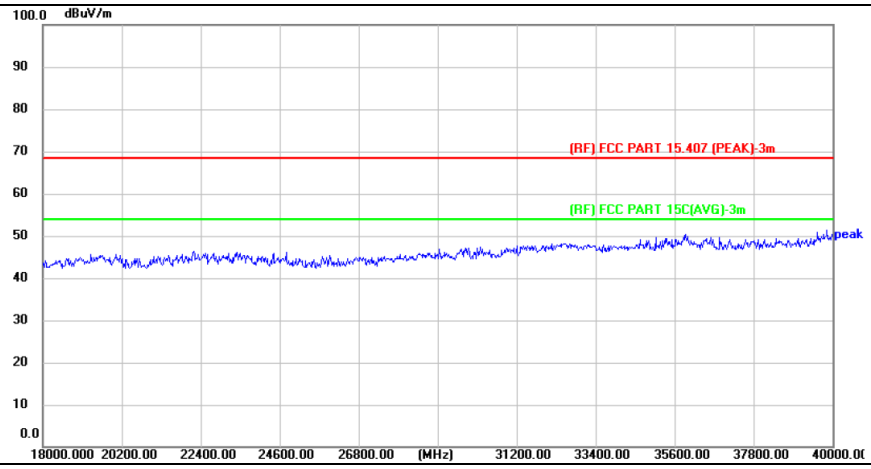

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9500.000	41.71	0.47	42.18	68.30	-26.12	peak	P
2	11166.000	41.30	-0.28	41.02	68.30	-27.28	peak	P
3 *	17762.000	38.41	8.12	46.53	68.30	-21.77	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5580MHz-SISO-ANT.1

Vertical

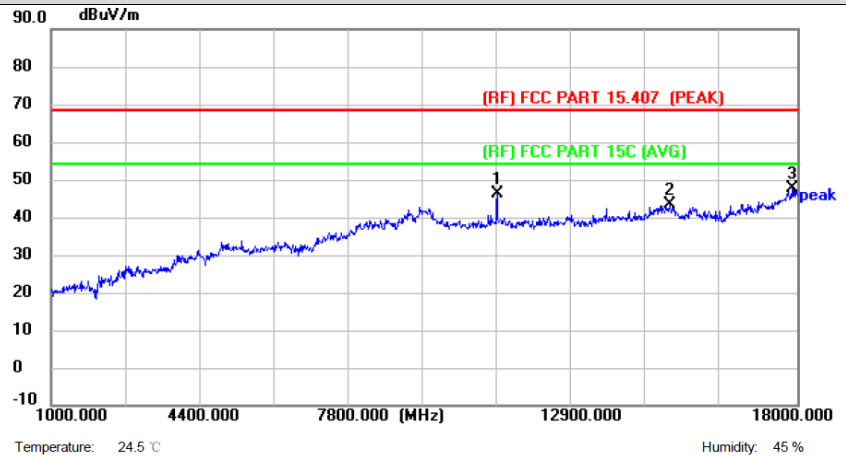

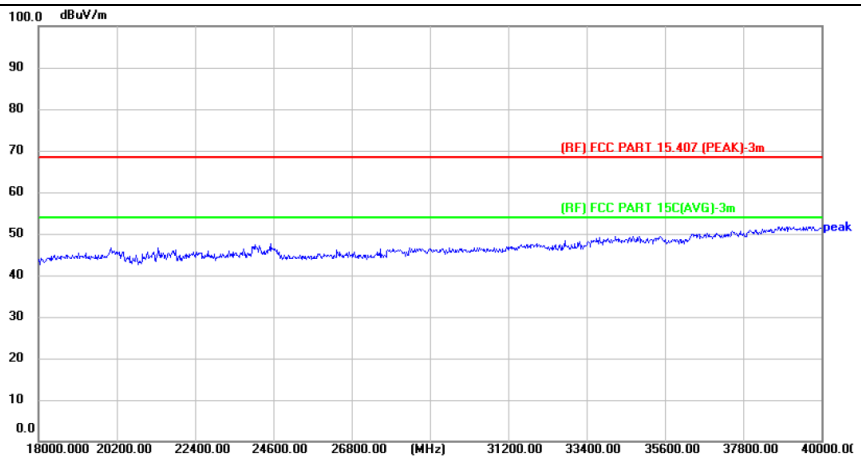

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11166.000	46.67	-0.28	46.39	68.30	-21.91	peak	P
2	15093.000	39.72	3.73	43.45	68.30	-24.85	peak	P
3 *	17898.000	39.09	8.45	47.54	68.30	-20.76	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5720MHz-SISO-ANT.1

Horizontal

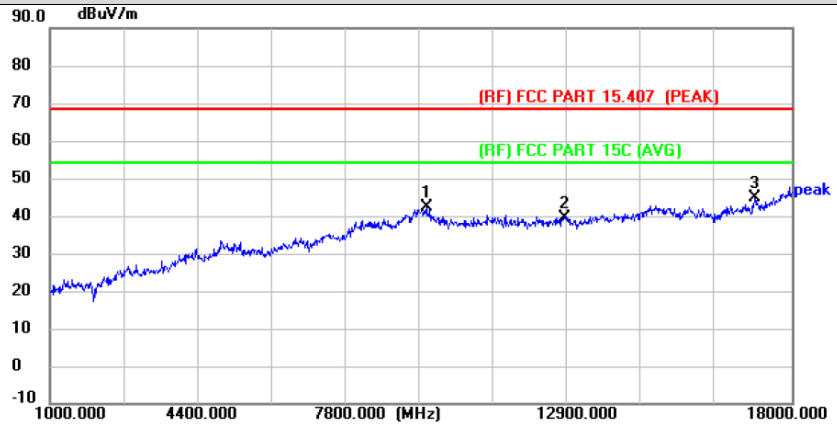

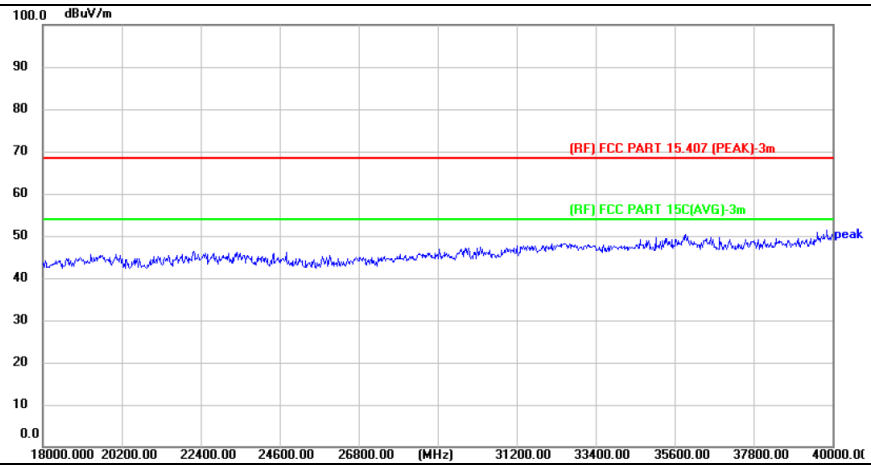

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9636.000	42.75	-0.58	42.17	68.30	-26.13	peak	P
2	12798.000	38.24	1.27	39.51	68.30	-28.79	peak	P
3 *	17150.000	38.85	6.08	44.93	68.30	-23.37	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5720MHz-SISO-ANT.1

Vertical

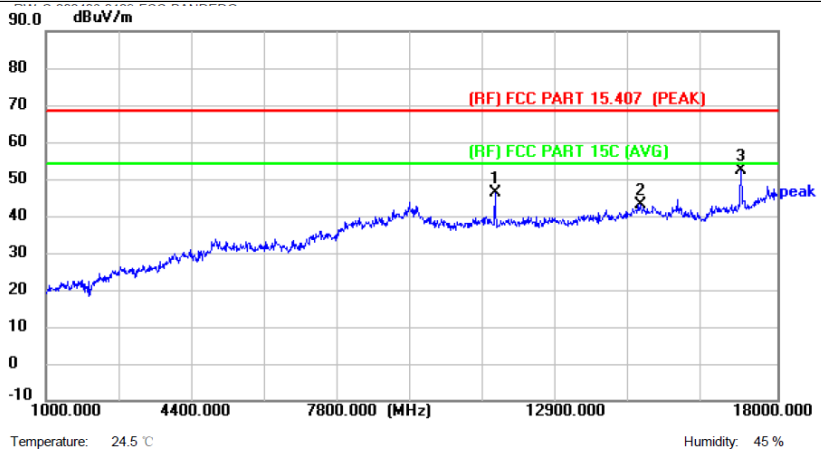

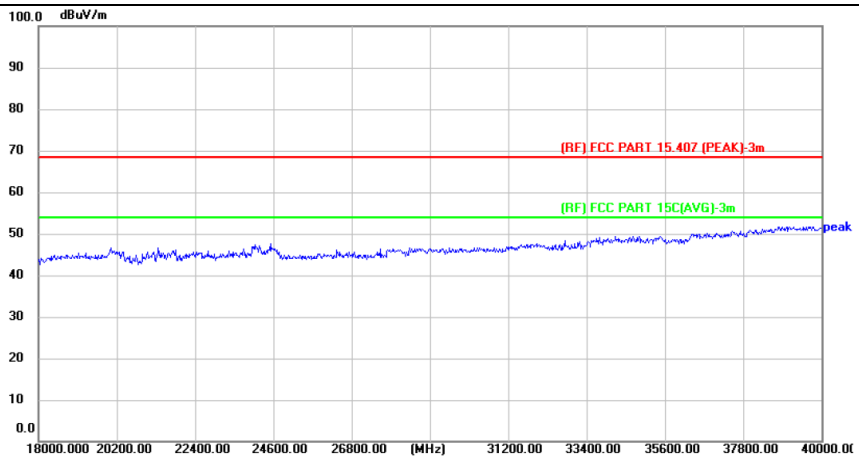

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11438.000	46.24	-0.14	46.10	68.30	-22.20	peak	P
2	14838.000	39.07	4.04	43.11	68.30	-25.19	peak	P
3 *	17150.000	46.14	6.08	52.22	68.30	-16.08	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n40 Mode 5190MHz-MIMO-ANT.1+2

Horizontal

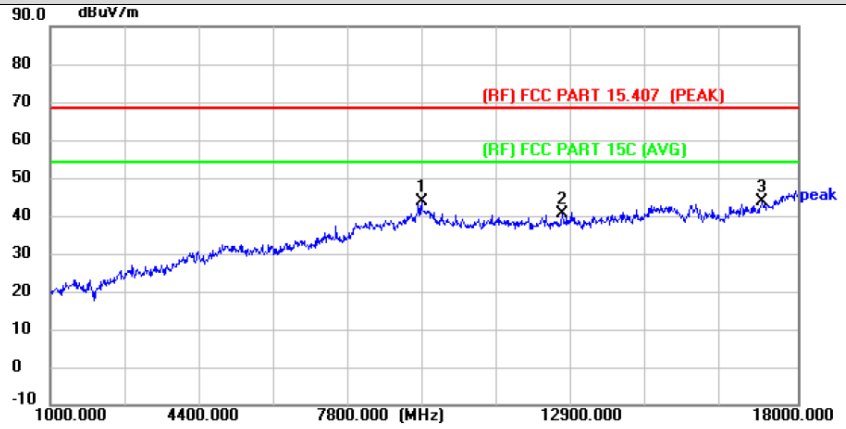

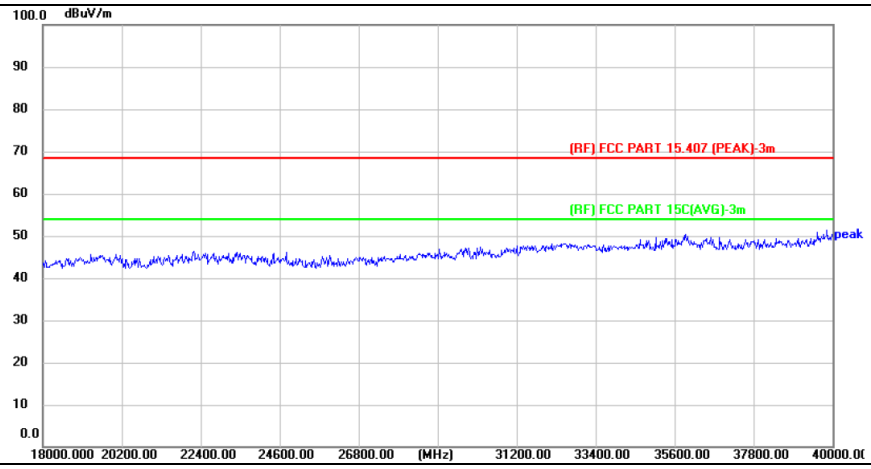

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9449.000	43.53	0.29	43.82	68.30	-24.48	peak	P
2	12645.000	39.66	0.70	40.36	68.30	-27.94	peak	P
3 *	17201.000	37.45	6.43	43.88	68.30	-24.42	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n40 Mode 5190MHz-MIMO-ANT.1+2

Vertical

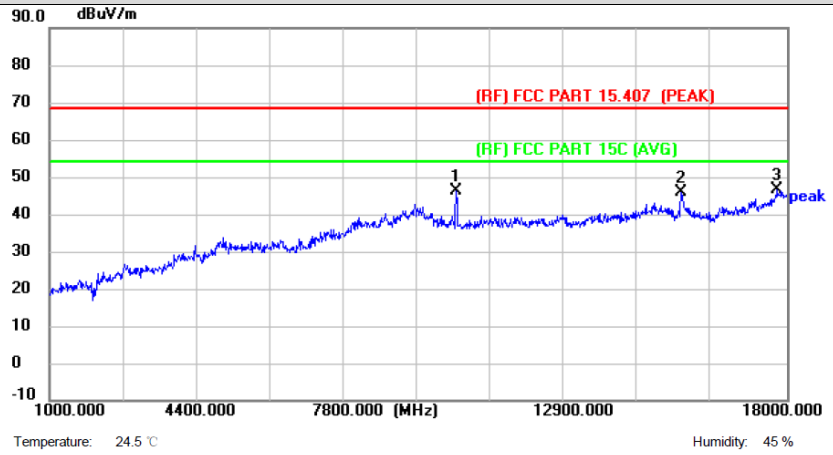

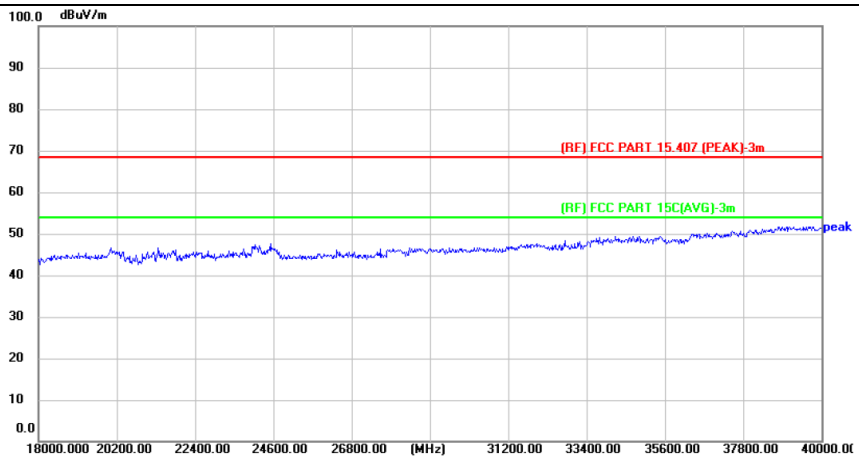

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10384.000	47.90	-1.49	46.41	68.30	-21.89	peak	P
2	15552.000	42.14	3.89	46.03	68.30	-22.27	peak	P
3 *	17779.000	38.13	8.35	46.48	68.30	-21.82	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n40 Mode 5230MHz-MIMO-ANT.1+2

Horizontal

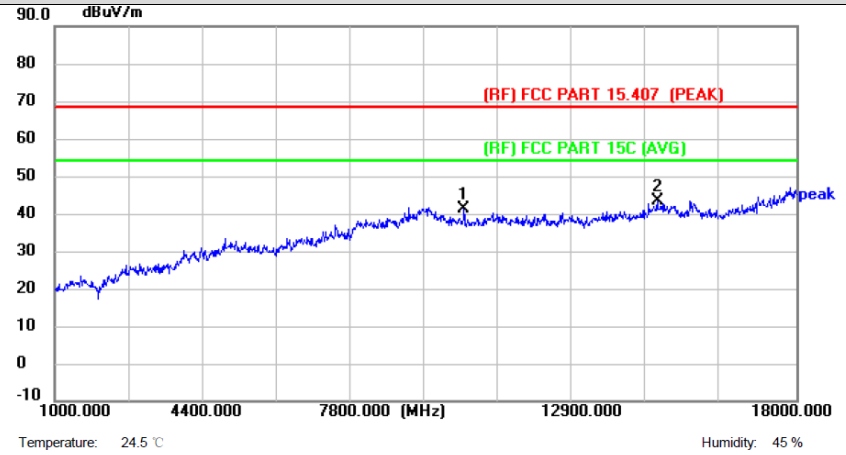

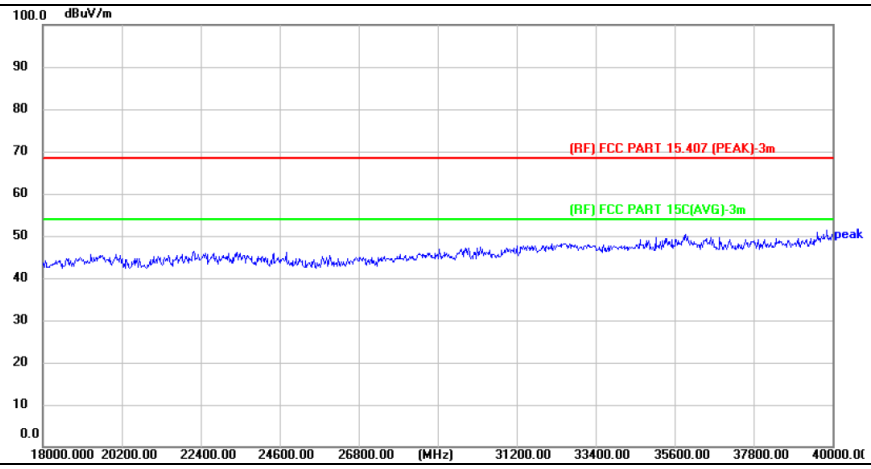

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10384.000	42.90	-1.49	41.41	68.30	-26.89	peak	P
2 *	14821.000	39.54	4.01	43.55	68.30	-24.75	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n40 Mode 5230MHz-MIMO-ANT.1+2

Vertical

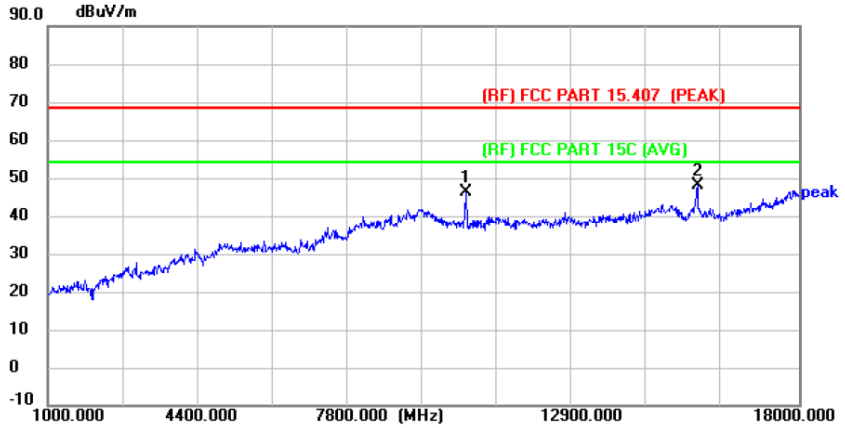

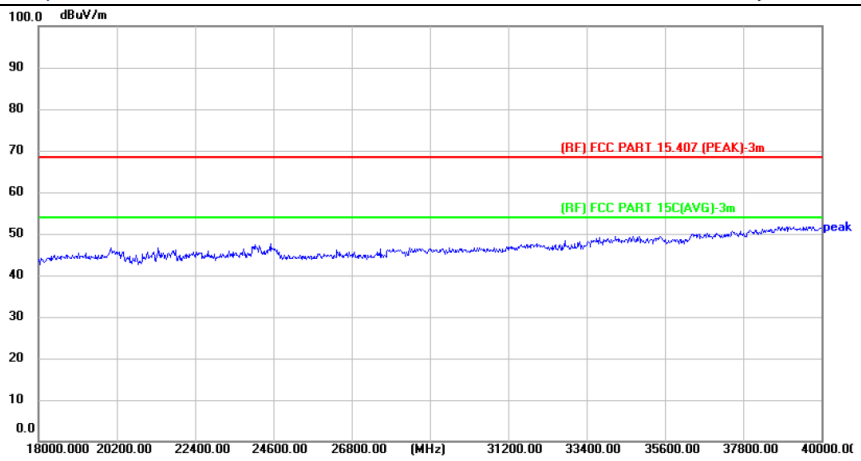

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10452.000	47.76	-1.54	46.22	68.30	-22.08	peak	P
2 *	15705.000	43.21	4.66	47.87	68.30	-20.43	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n40 Mode 5270MHz-MIMO-ANT.1+2

Horizontal

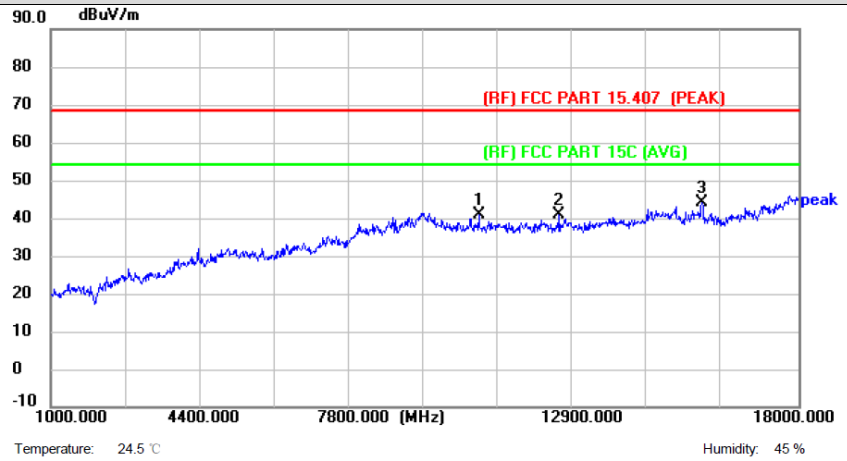

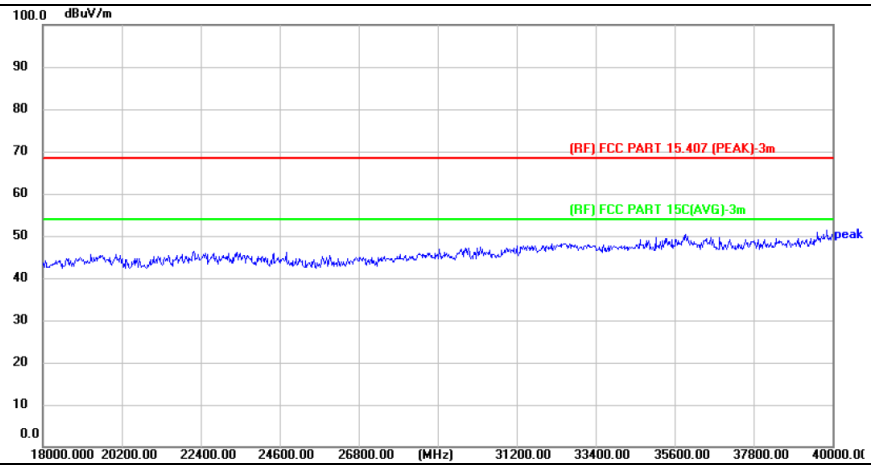

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10741.000	42.06	-1.25	40.81	68.30	-27.49	peak	P
2	12560.000	40.28	0.62	40.90	68.30	-27.40	peak	P
3 *	15807.000	39.92	4.05	43.97	68.30	-24.33	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n40 Mode 5270MHz-MIMO-ANT.1+2

Vertical

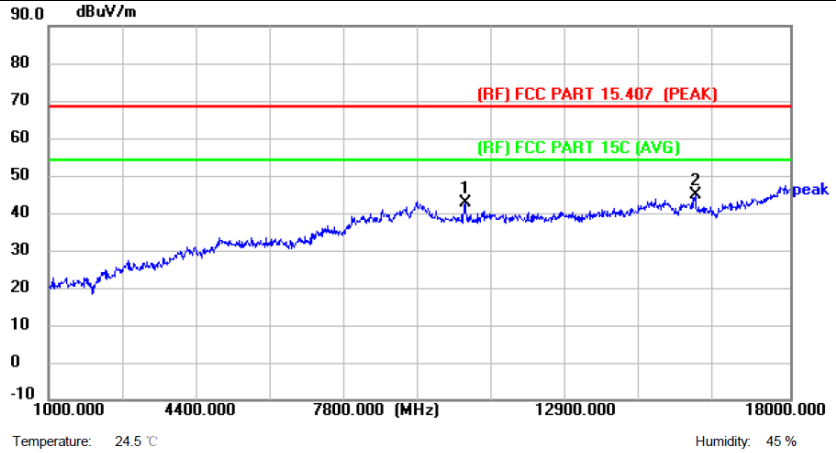

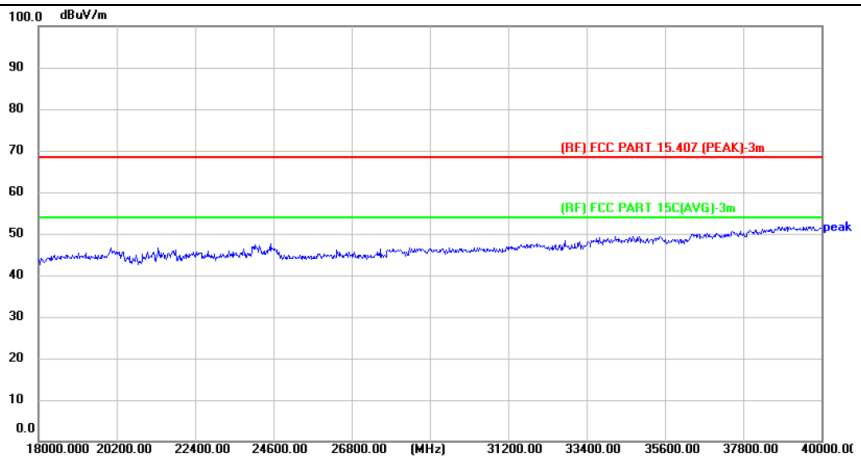

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10554.000	44.19	-1.42	42.77	68.30	-25.53	peak	P
2 *	15824.000	40.70	4.04	44.74	68.30	-23.56	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n40 Mode 5310MHz-MIMO-ANT.1+2

Horizontal

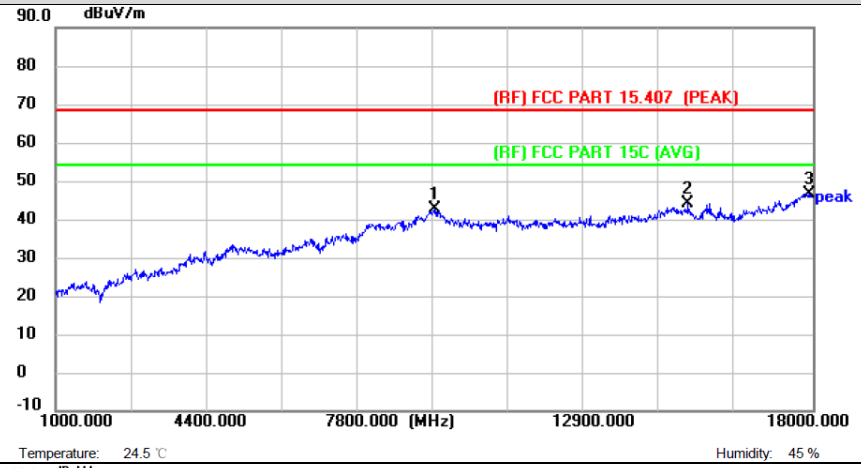

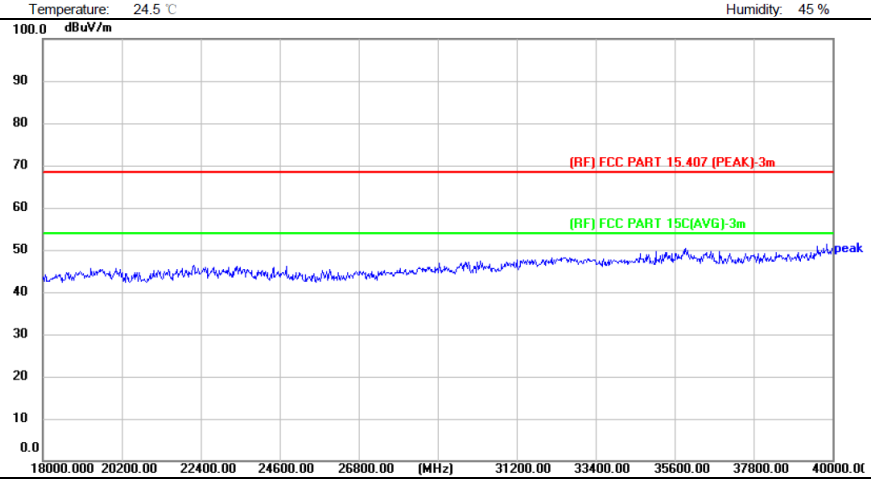

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9517.000	42.23	0.35	42.58	68.30	-25.72	peak	P
2	15195.000	40.24	4.00	44.24	68.30	-24.06	peak	P
3 *	17915.000	38.22	8.50	46.72	68.30	-21.58	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n40 Mode 5310MHz-MIMO-ANT.1+2

Vertical

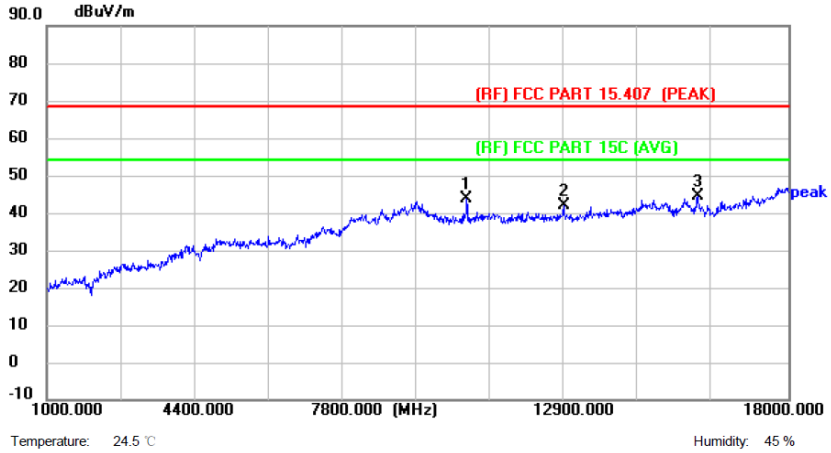

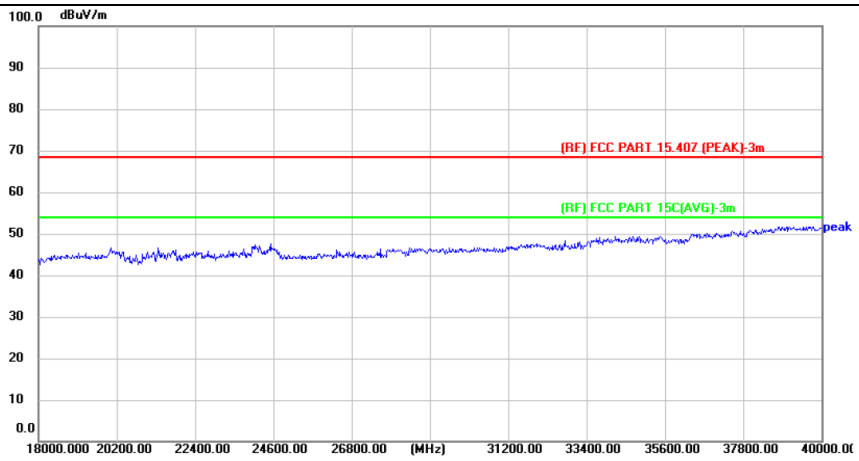

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10622.000	45.16	-1.30	43.86	68.30	-24.44	peak	P
2	12849.000	40.89	0.91	41.80	68.30	-26.50	peak	P
3 *	15926.000	40.57	3.87	44.44	68.30	-23.86	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n40 Mode 5510MHz-MIMO-ANT.1+2

Horizontal

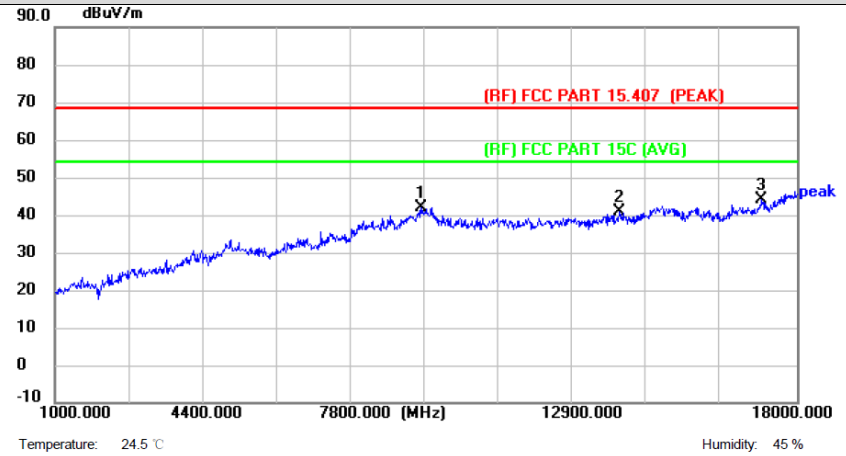

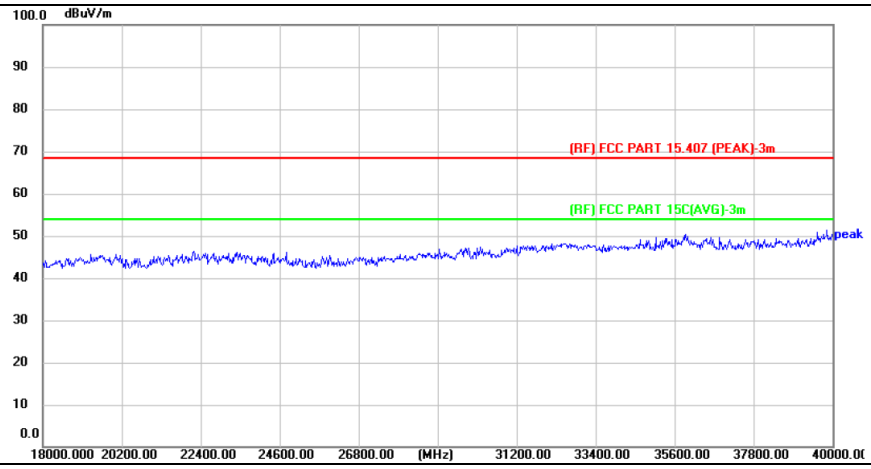

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9381.000	42.56	-0.54	42.02	68.30	-26.28	peak	P
2	13937.000	39.10	1.80	40.90	68.30	-27.40	peak	P
3 *	17201.000	37.54	6.43	43.97	68.30	-24.33	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n40 Mode 5510MHz-MIMO-ANT.1+2

Vertical

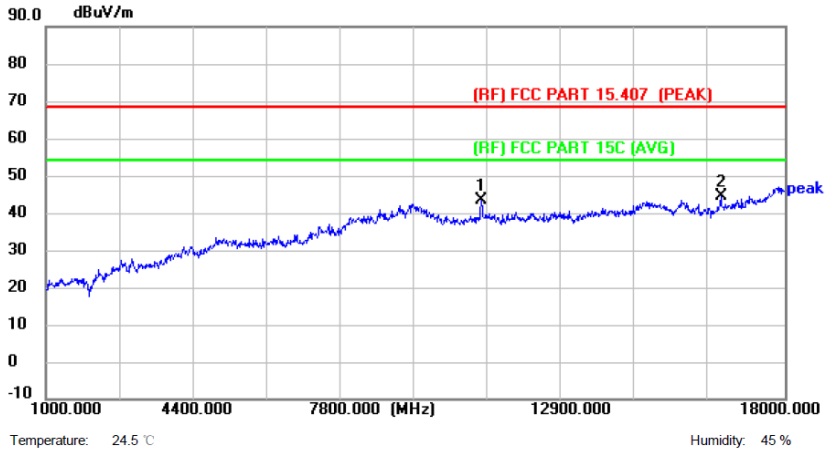

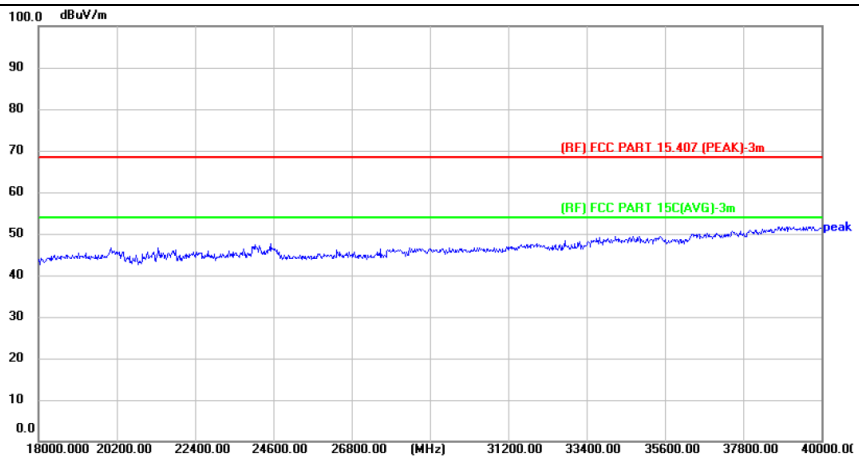

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11013.000	43.75	-0.27	43.48	68.30	-24.82	peak	P
2 *	16538.000	39.82	4.50	44.32	68.30	-23.98	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n40 Mode 5550MHz-MIMO-ANT.1+2

Horizontal

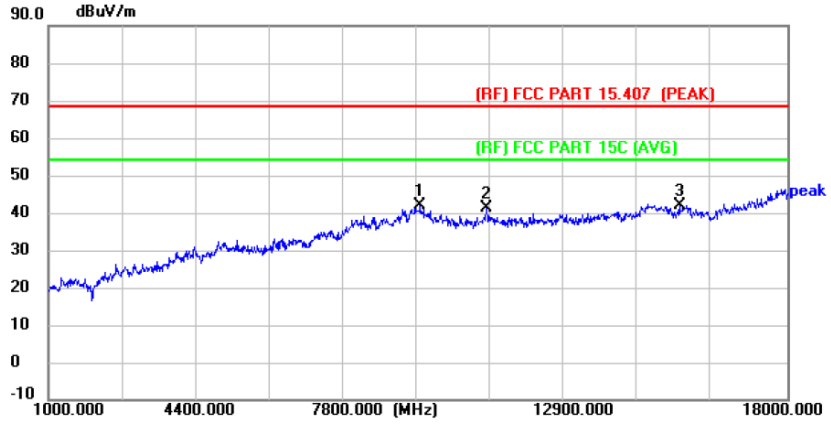

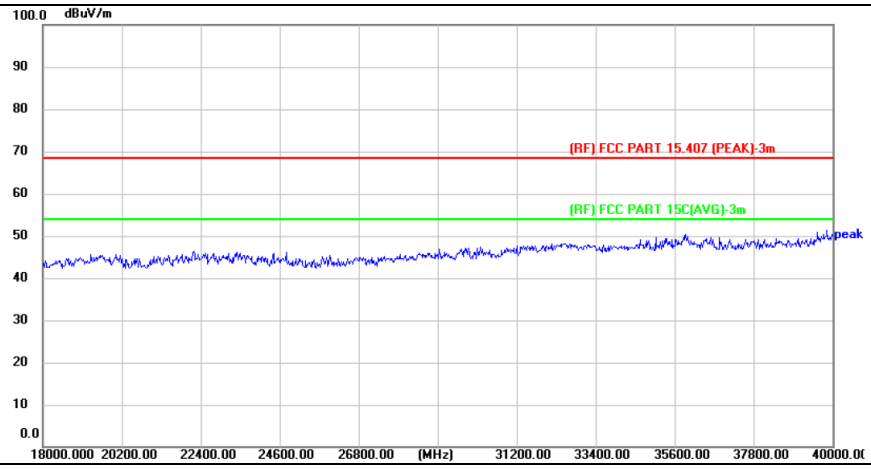

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	9551.000	41.96	0.14	42.10	68.30	-26.20	peak	P
2	11081.000	41.49	-0.39	41.10	68.30	-27.20	peak	P
3	15518.000	38.50	3.59	42.09	68.30	-26.21	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n40 Mode 5550MHz-MIMO-ANT.1+2

Vertical

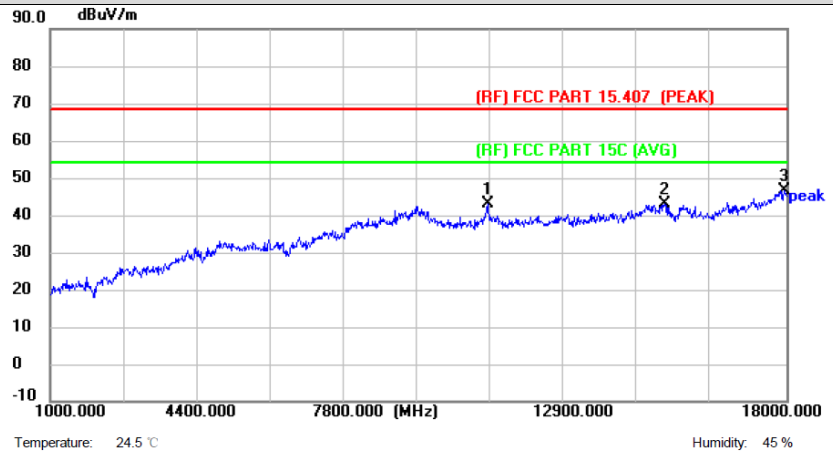

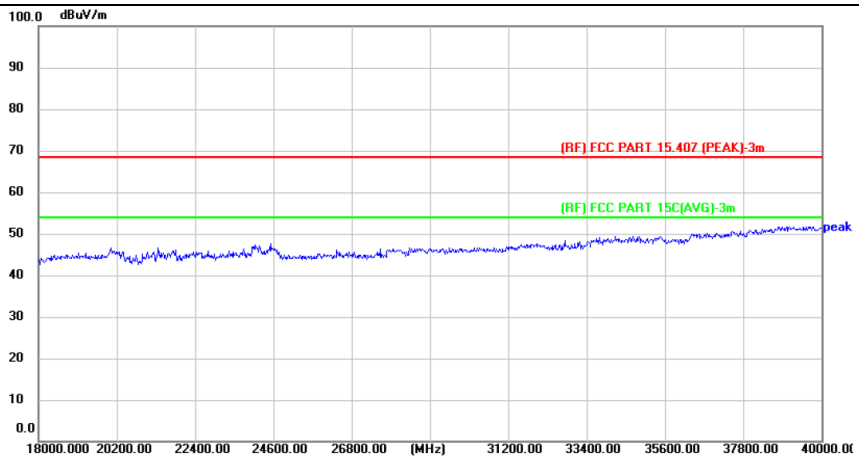

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11098.000	43.50	-0.42	43.08	68.30	-25.22	peak	P
2	15195.000	38.87	4.00	42.87	68.30	-25.43	peak	P
3 *	17949.000	37.95	8.65	46.60	68.30	-21.70	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n40 Mode 5710MHz-MIMO-ANT.1+2

Horizontal

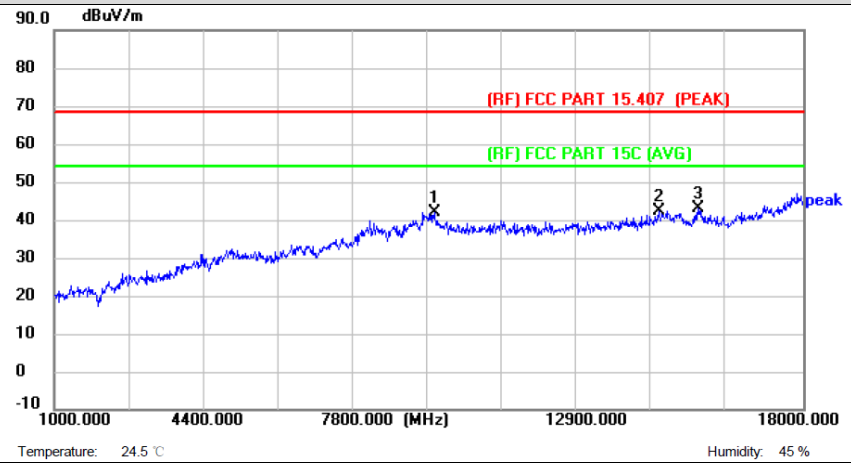

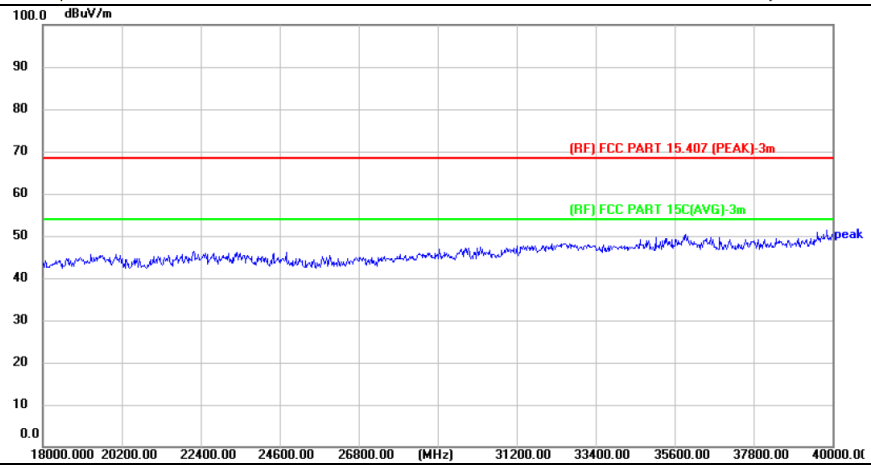

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9636.000	42.57	-0.58	41.99	68.30	-26.31	peak	P
2	14719.000	38.95	3.32	42.27	68.30	-26.03	peak	P
3 *	15637.000	38.60	4.45	43.05	68.30	-25.25	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n40 Mode 5710MHz-MIMO-ANT.1+2

Vertical

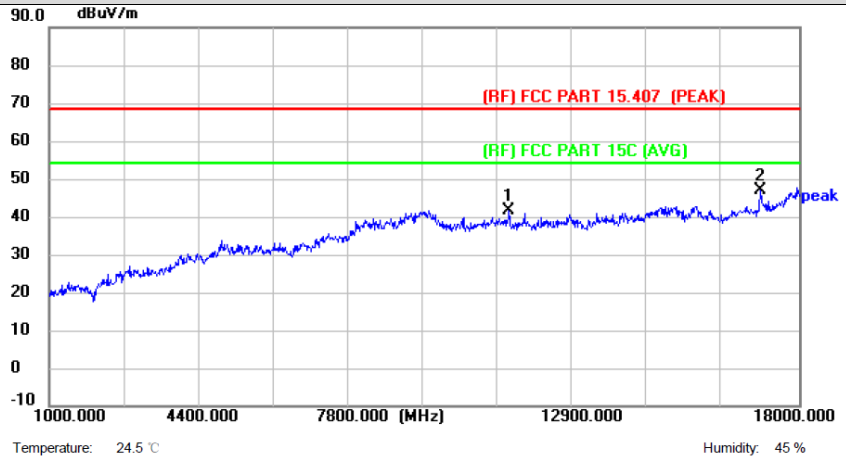

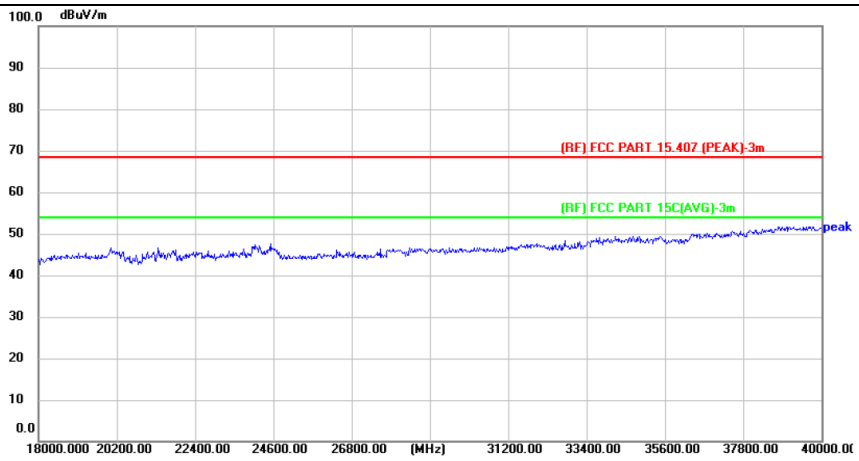

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11421.000	41.73	-0.11	41.62	68.30	-26.68	peak	P
2 *	17116.000	41.08	5.84	46.92	68.30	-21.38	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac80 Mode 5210MHz-MIMO-ANT.1+2

Horizontal

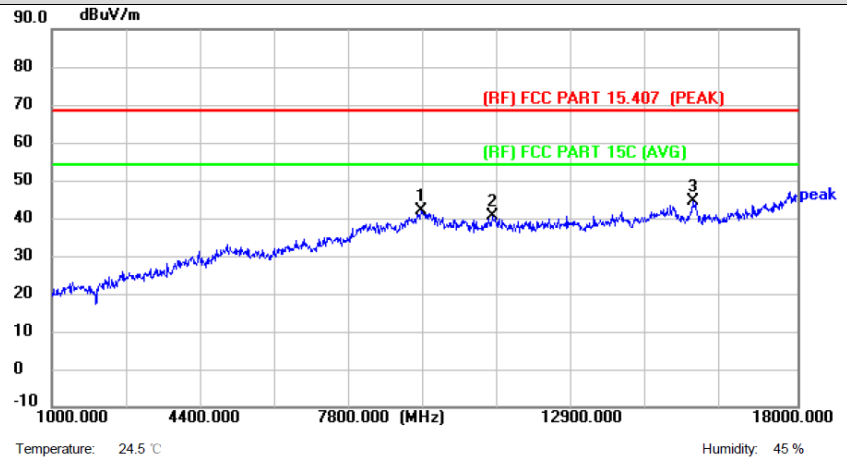

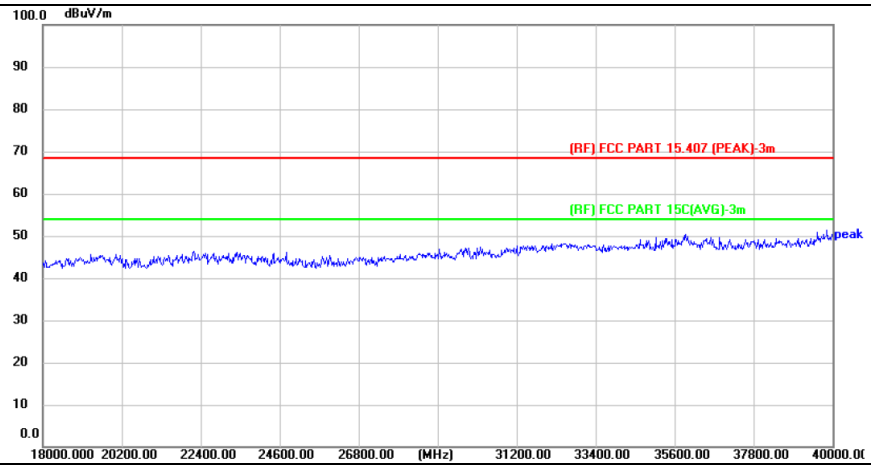

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9432.000	42.07	0.02	42.09	68.30	-26.21	peak	P
2	11047.000	40.90	-0.33	40.57	68.30	-27.73	peak	P
3 *	15620.000	40.02	4.38	44.40	68.30	-23.90	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac80 Mode 5210MHz-MIMO-ANT.1+2

Vertical

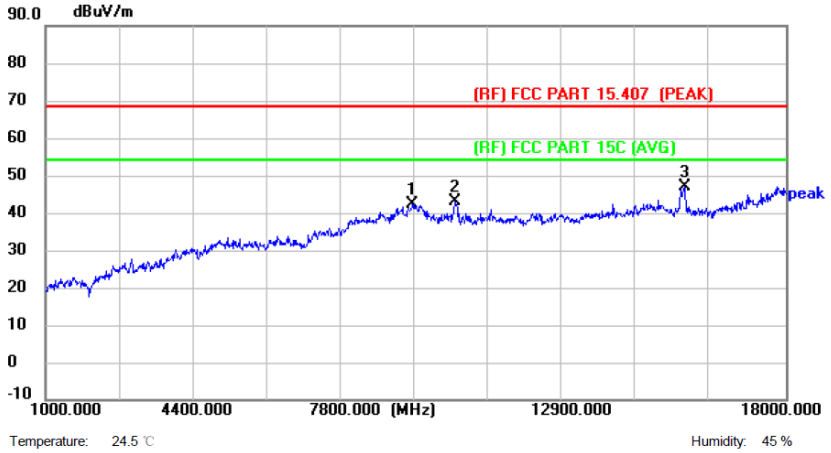

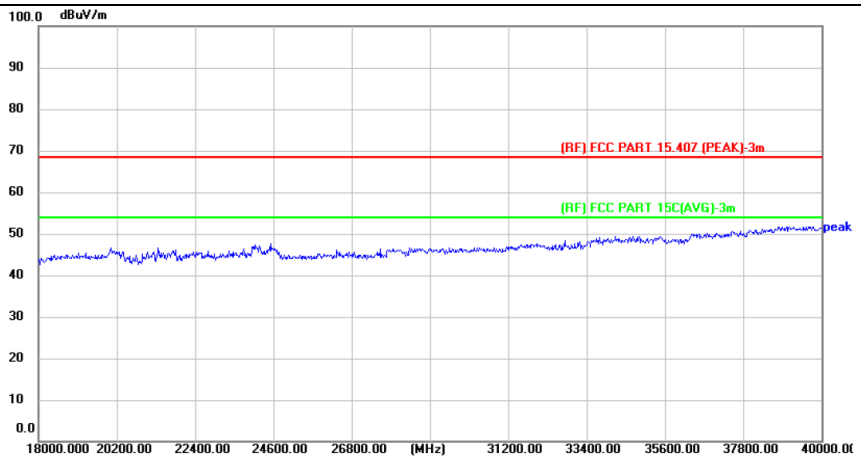

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9432.000	42.40	0.02	42.42	68.30	-25.88	peak	P
2	10418.000	44.61	-1.52	43.09	68.30	-25.21	peak	P
3 *	15671.000	42.52	4.57	47.09	68.30	-21.21	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac80 Mode 5290MHz-MIMO-ANT.1+2

Horizontal

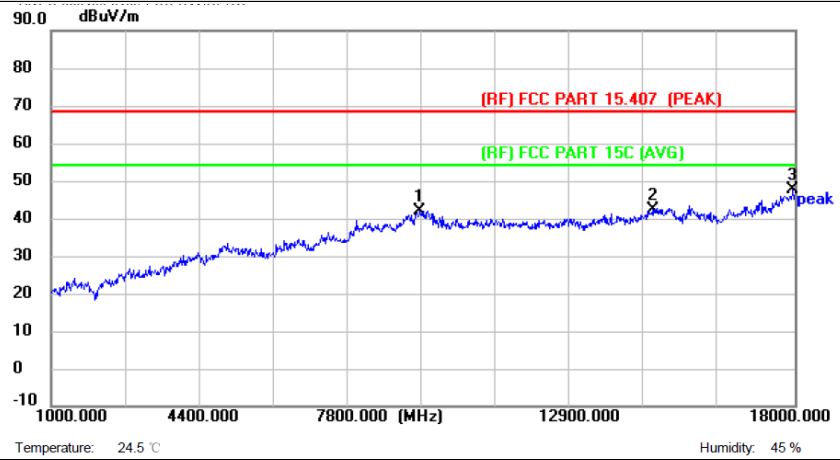

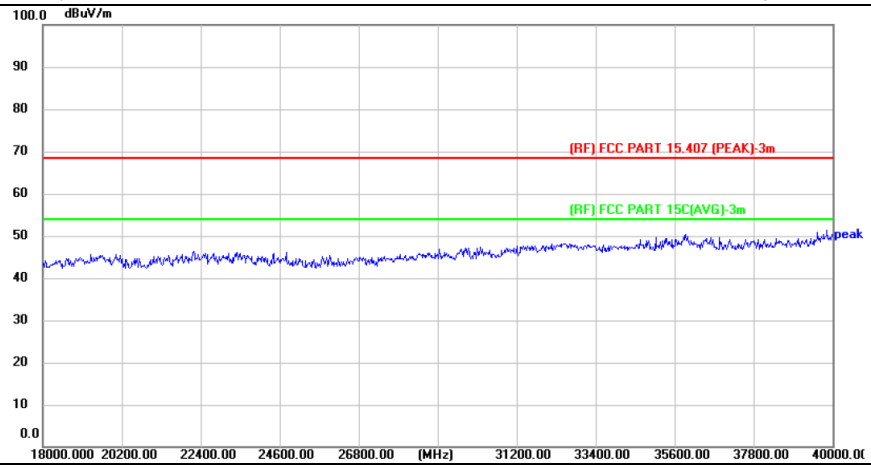

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9432.000	41.90	0.02	41.92	68.30	-26.38	peak	P
2	14753.000	38.80	3.59	42.39	68.30	-25.91	peak	P
3 *	17966.000	39.08	8.72	47.80	68.30	-20.50	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac80 Mode 5290MHz-MIMO-ANT.1+2

Vertical

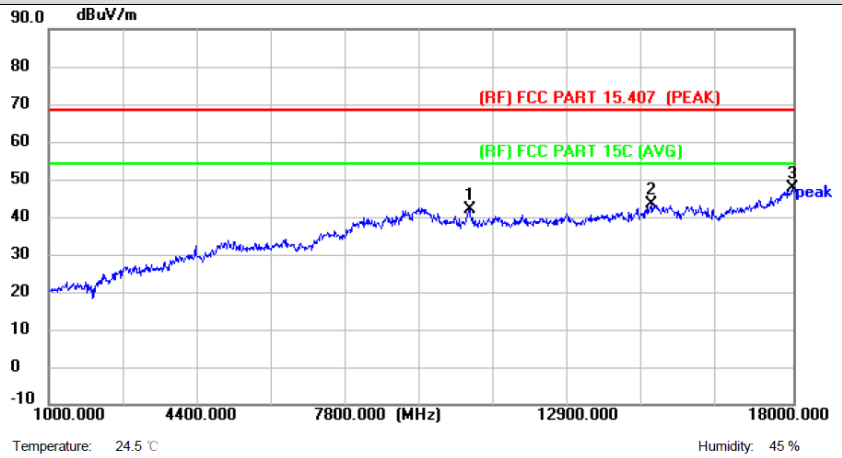

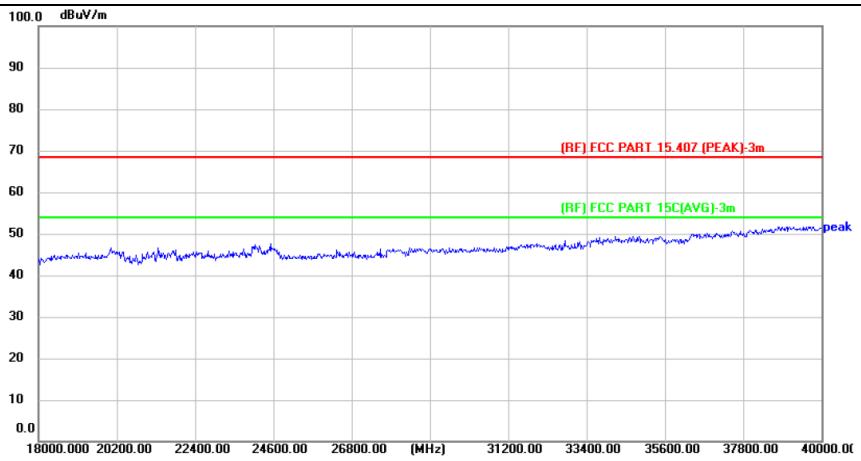

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10605.000	43.14	-1.29	41.85	68.30	-26.45	peak	P
2	14753.000	39.71	3.59	43.30	68.30	-25.00	peak	P
3 *	17983.000	38.72	8.79	47.51	68.30	-20.79	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac80 Mode 5530MHz-MIMO-ANT.1+2

Horizontal

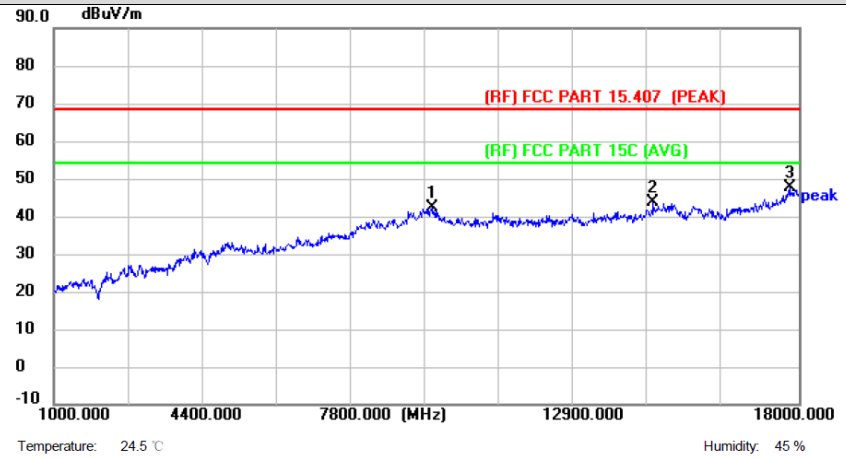

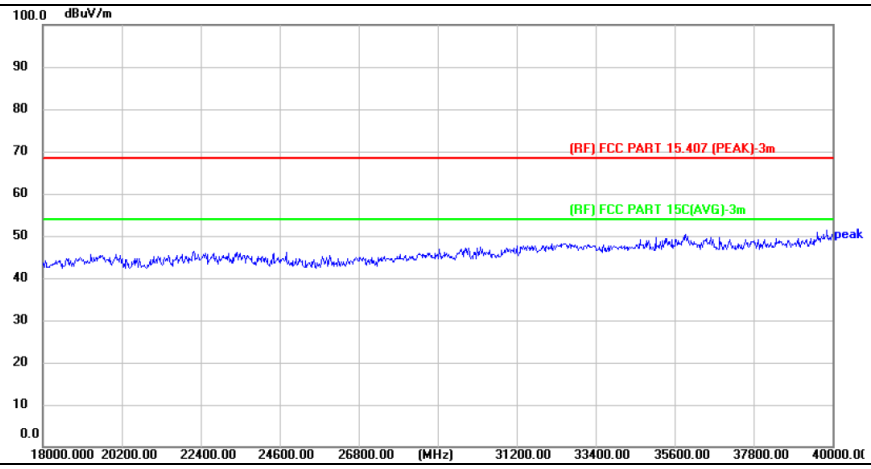

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9636.000	42.86	-0.58	42.28	68.30	-26.02	peak	P
2	14685.000	40.51	3.11	43.62	68.30	-24.68	peak	P
3 *	17796.000	38.98	8.58	47.56	68.30	-20.74	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac80 Mode 5530MHz-MIMO-ANT.1+2

Vertical

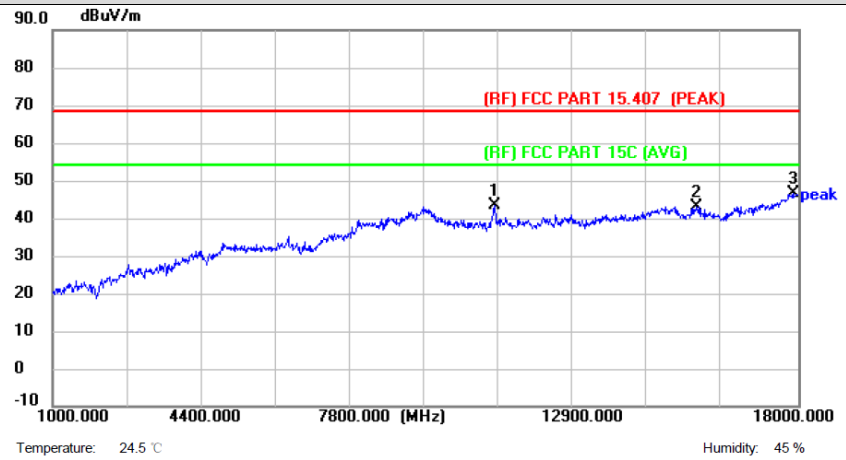

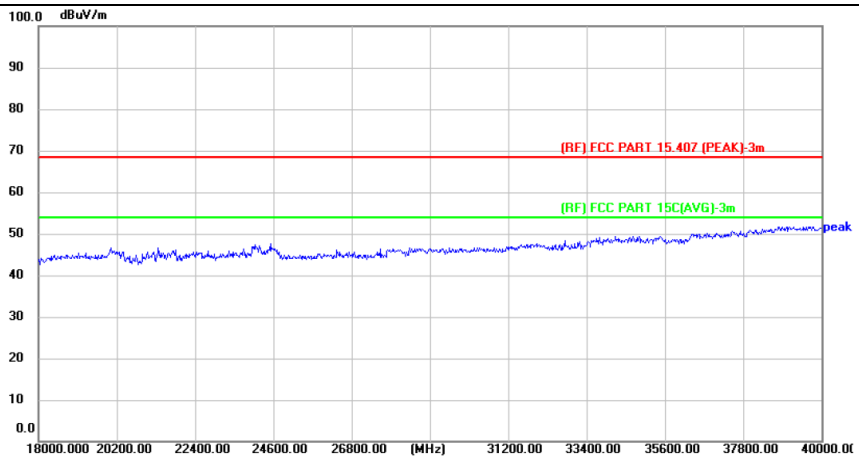

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11081.000	43.72	-0.39	43.33	68.30	-24.97	peak	P
2	15688.000	38.53	4.64	43.17	68.30	-25.13	peak	P
3 *	17881.000	38.12	8.48	46.60	68.30	-21.70	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac80 Mode 5610MHz-MIMO-ANT.1+2

Horizontal

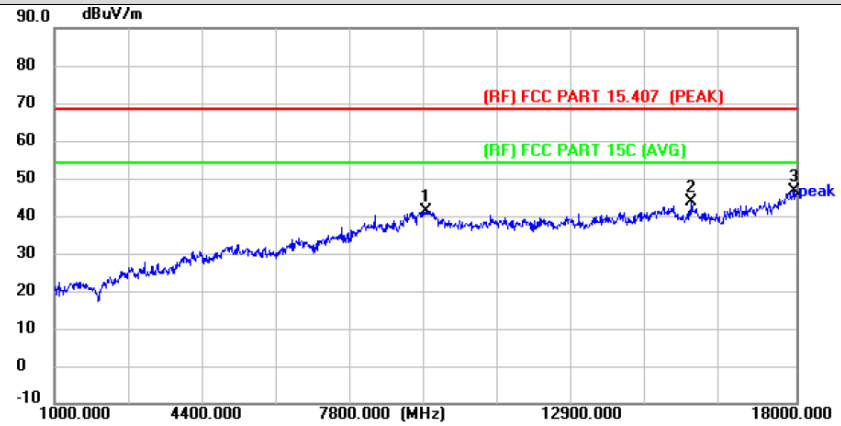

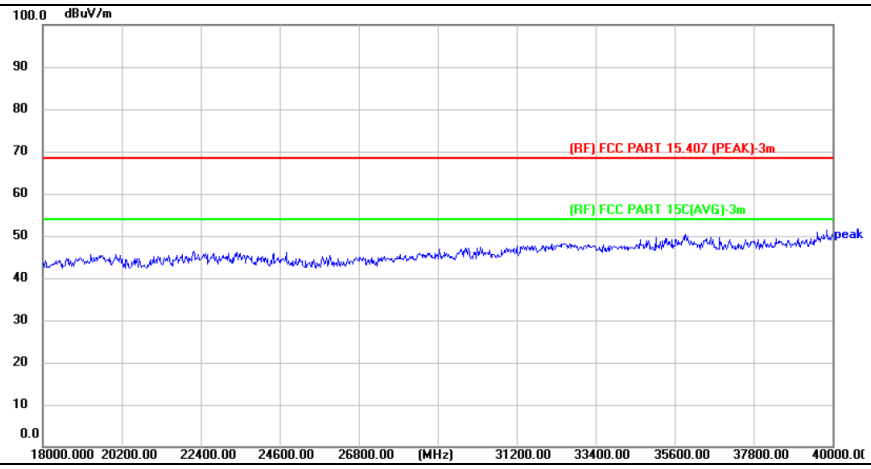

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9500.000	40.93	0.47	41.40	68.30	-26.90	peak	P
2	15603.000	39.41	4.32	43.73	68.30	-24.57	peak	P
3 *	17949.000	38.13	8.65	46.78	68.30	-21.52	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac80 Mode 5610MHz-MIMO-ANT.1+2

Vertical

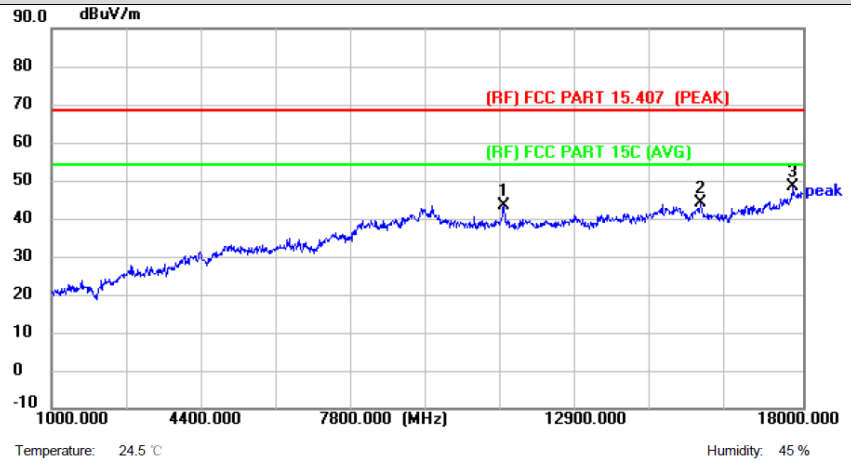

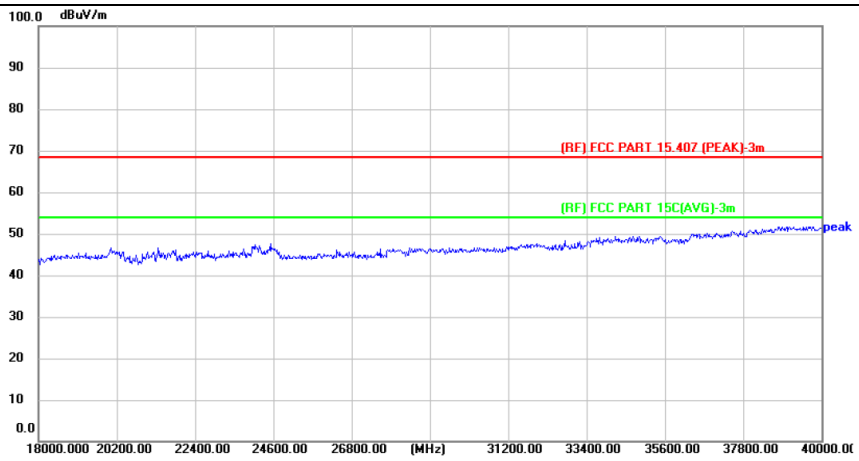

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11234.000	43.39	-0.17	43.22	68.30	-25.08	peak	P
2	15671.000	39.63	4.57	44.20	68.30	-24.10	peak	P
3 *	17762.000	40.31	8.12	48.43	68.30	-19.87	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac80 Mode 5690MHz-MIMO-ANT.1+2

Horizontal

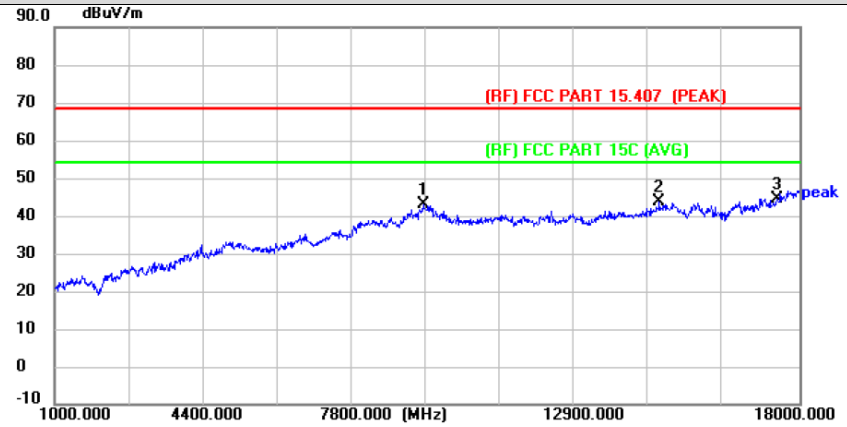

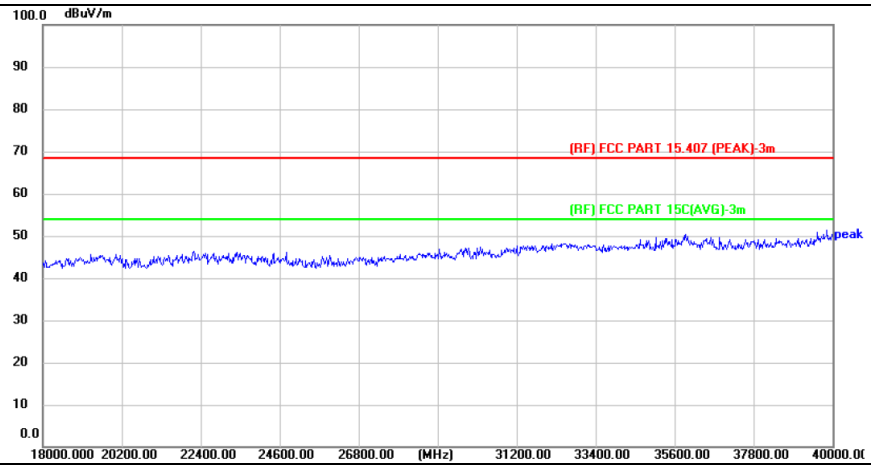

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9415.000	43.36	-0.24	43.12	68.30	-25.18	peak	P
2	14804.000	39.70	3.97	43.67	68.30	-24.63	peak	P
3 *	17490.000	37.99	6.62	44.61	68.30	-23.69	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac80 Mode 5690MHz-MIMO-ANT.1+2

Vertical

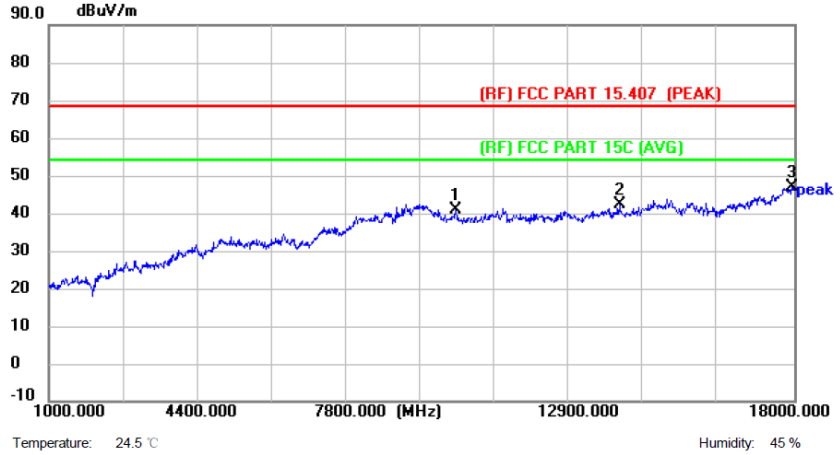

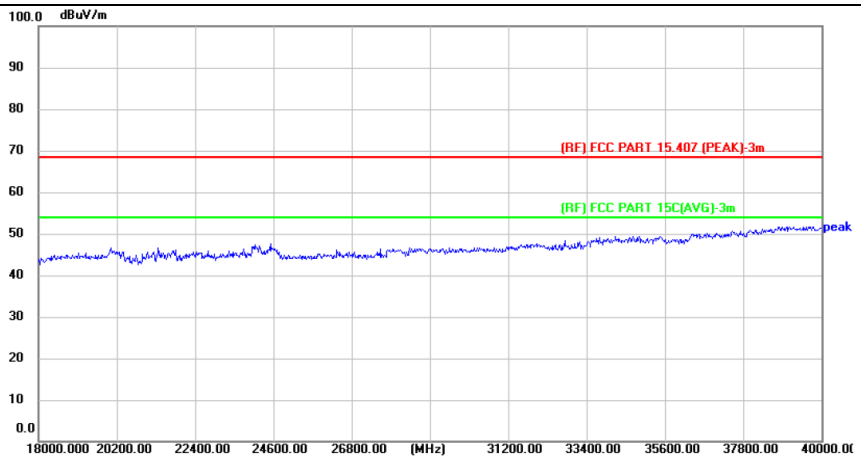

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10282.000	42.28	-1.37	40.91	68.30	-27.39	peak	P
2	14022.000	40.16	2.15	42.31	68.30	-25.99	peak	P
3 *	17949.000	38.48	8.65	47.13	68.30	-21.17	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5745MHz-SISO-ANT.1

Horizontal

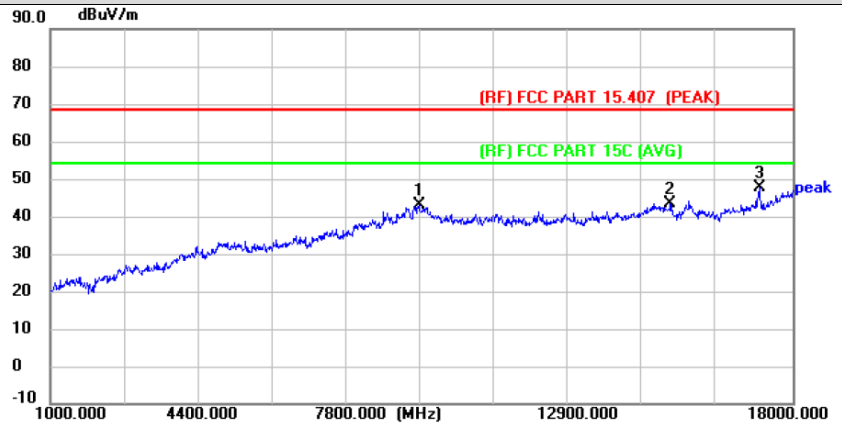

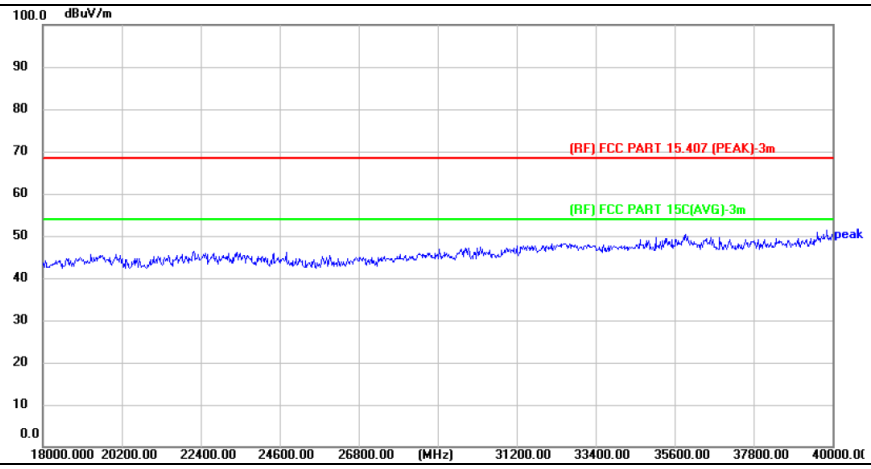

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9449.000	42.61	0.29	42.90	68.30	-25.40	peak	P
2	15195.000	39.53	4.00	43.53	68.30	-24.77	peak	P
3 *	17235.000	41.32	6.33	47.65	68.30	-20.65	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5745MHz-SISO-ANT.1

Vertical

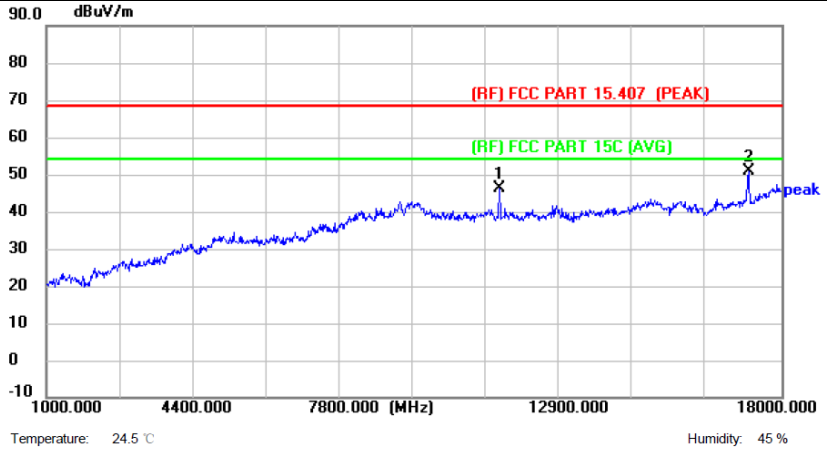

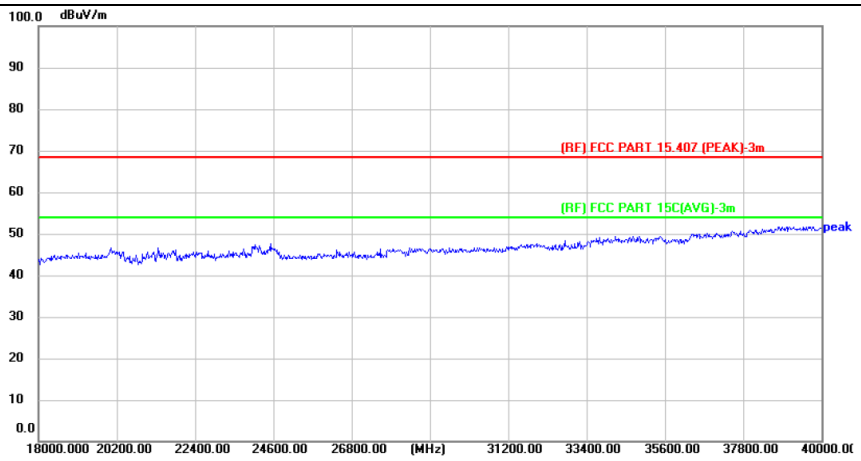

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11472.000	46.58	-0.21	46.37	68.30	-21.93	peak	P
2 *	17235.000	44.68	6.33	51.01	68.30	-17.29	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5785MHz-SISO-ANT.1

Horizontal

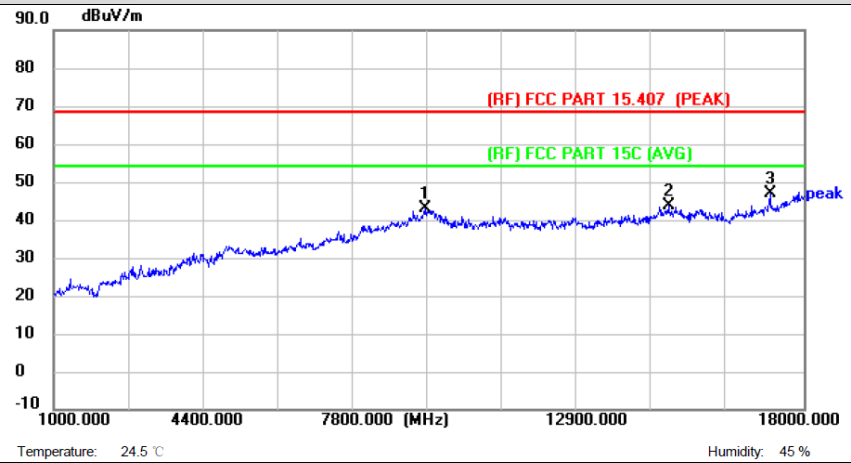

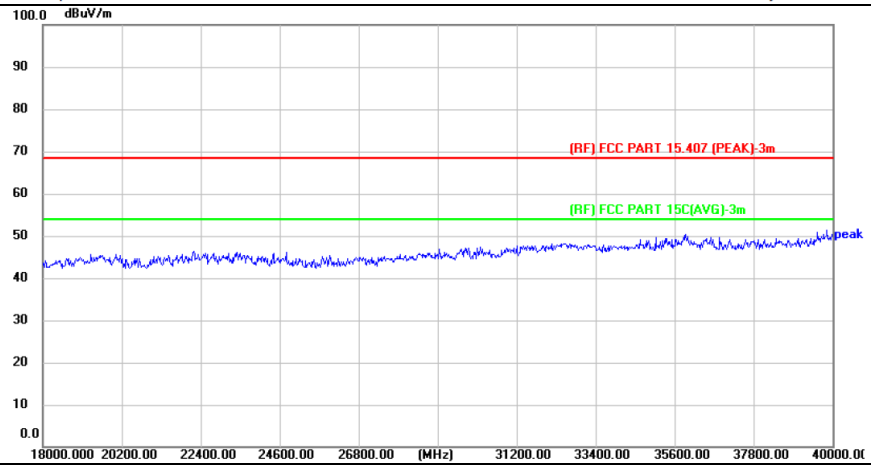

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9415.000	43.17	-0.24	42.93	68.30	-25.37	peak	P
2	14940.000	39.77	3.92	43.69	68.30	-24.61	peak	P
3 *	17235.000	40.65	6.33	46.98	68.30	-21.32	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5785MHz-SISO-ANT.1

Vertical

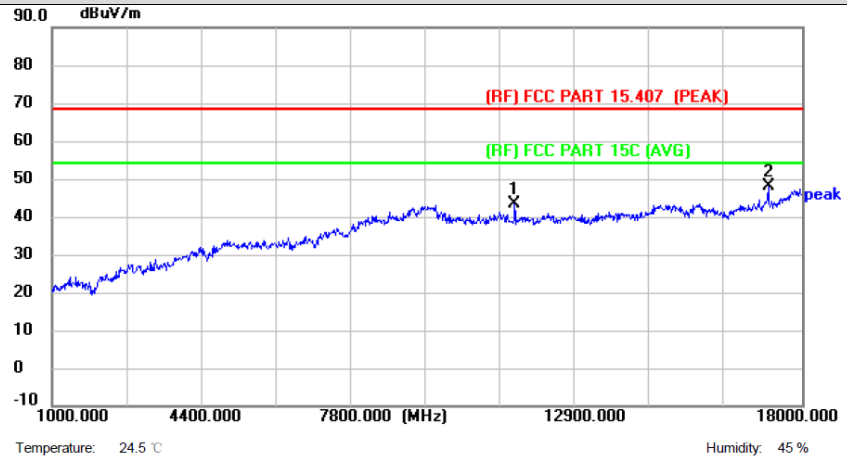

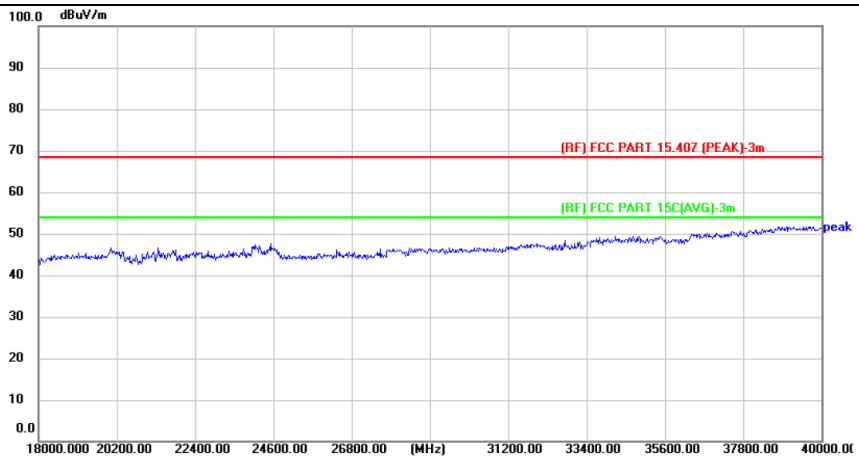

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11489.000	43.55	-0.24	43.31	68.30	-24.99	peak	P
2 *	17235.000	41.86	6.33	48.19	68.30	-20.11	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5825MHz-SISO-ANT.1

Horizontal

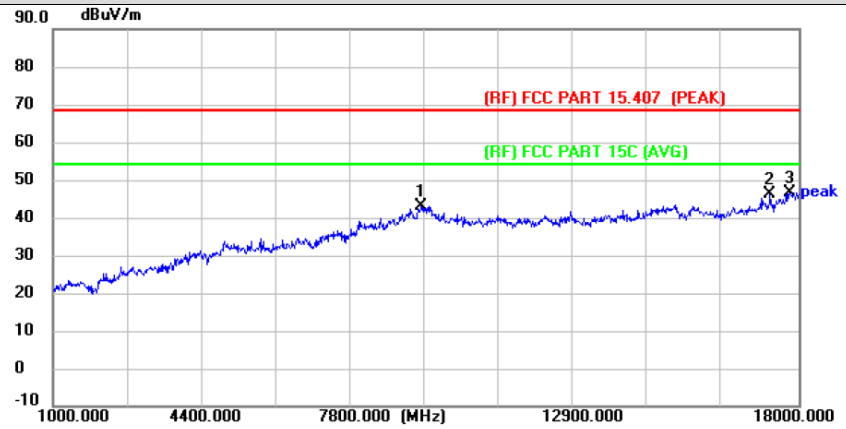

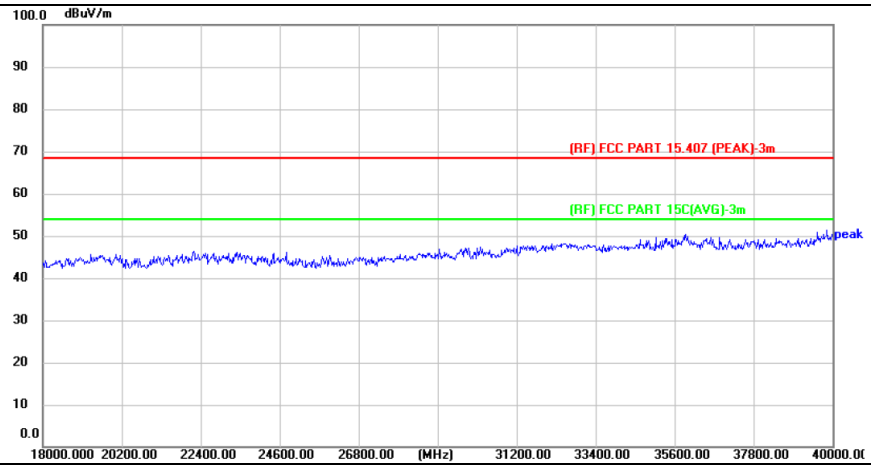

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9398.000	43.61	-0.47	43.14	68.30	-25.16	peak	P
2	17354.000	40.09	6.16	46.25	68.30	-22.05	peak	P
3 *	17796.000	38.14	8.58	46.72	68.30	-21.58	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11a Mode 5825MHz-SISO-ANT.1

Vertical

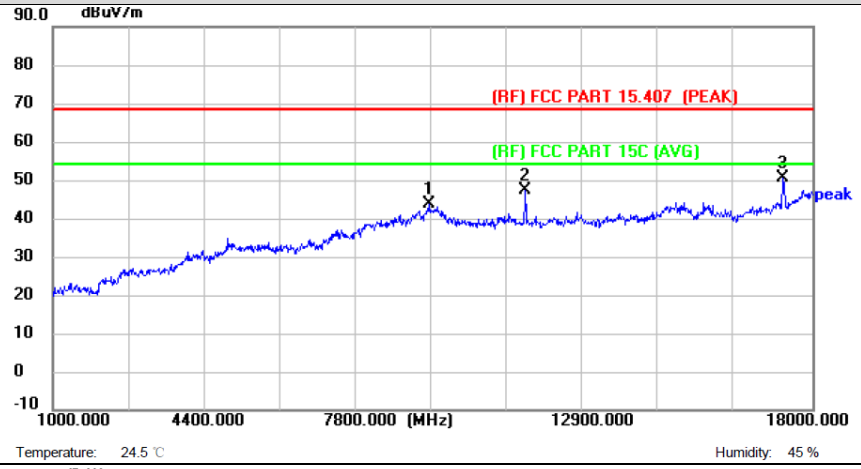

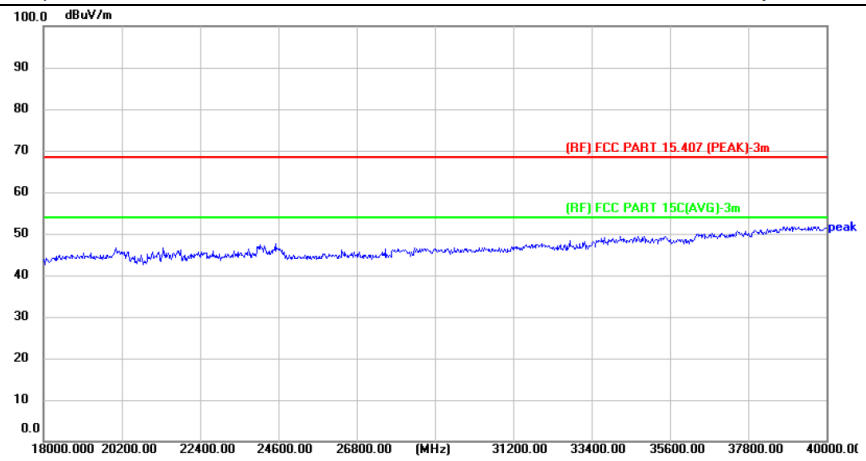

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9415.000	44.04	-0.24	43.80	68.30	-24.50	peak	P
2	11574.000	47.76	-0.39	47.37	68.30	-20.93	peak	P
3 *	17354.000	44.52	6.16	50.68	68.30	-17.62	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n20 Mode 5745MHz-MIMO-ANT.1+2

Horizontal

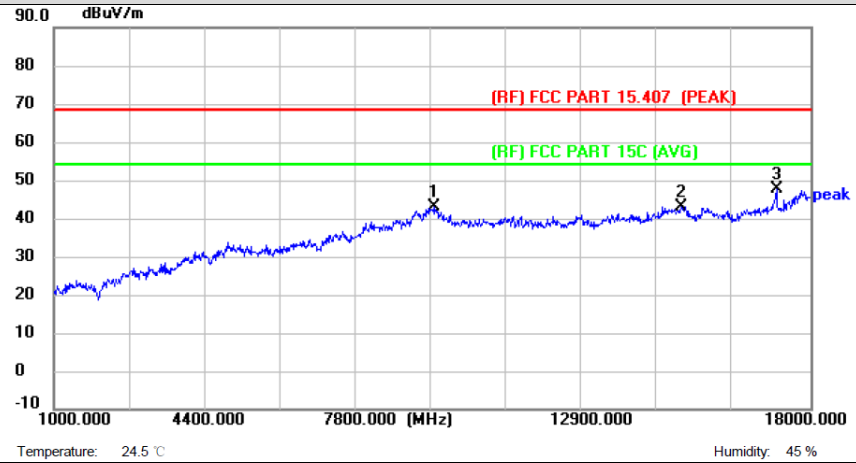

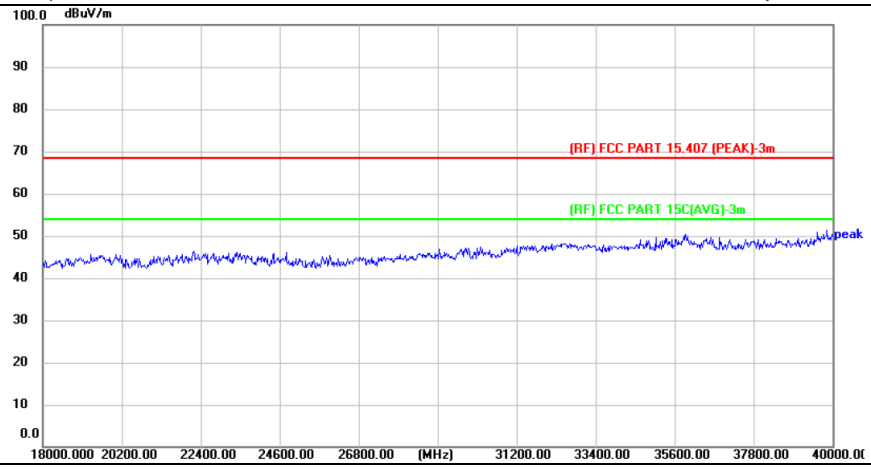

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9551.000	42.75	0.14	42.89	68.30	-25.41	peak	P
2	15110.000	39.44	3.76	43.20	68.30	-25.10	peak	P
3 *	17235.000	41.19	6.33	47.52	68.30	-20.78	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n20 Mode 5745MHz-MIMO-ANT.1+2

Vertical

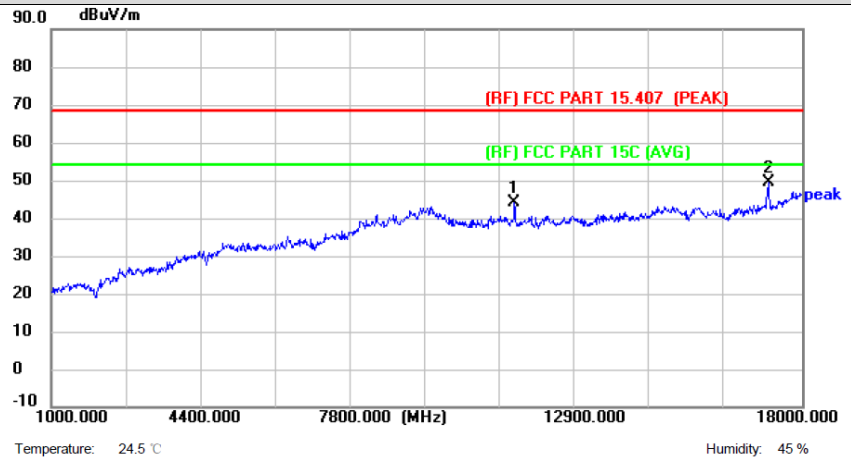

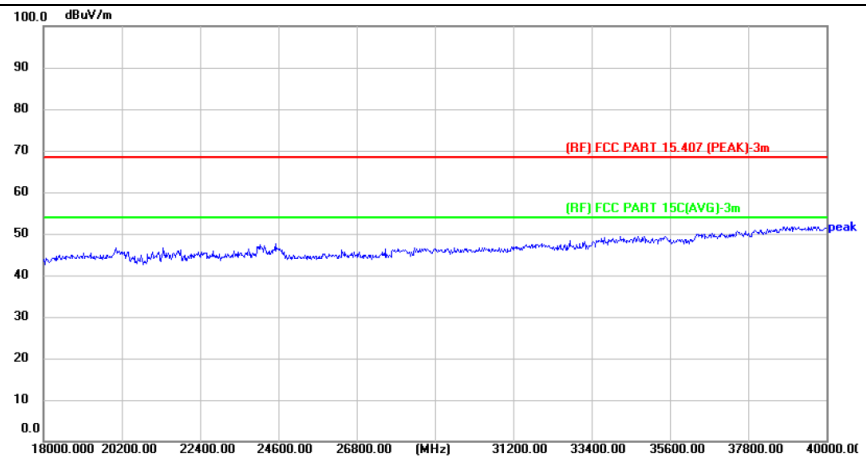

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11489.000	44.25	-0.24	44.01	68.30	-24.29	peak	P
2 *	17235.000	43.12	6.33	49.45	68.30	-18.85	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n20 Mode 5785MHz-MIMO-ANT.1+2

Horizontal

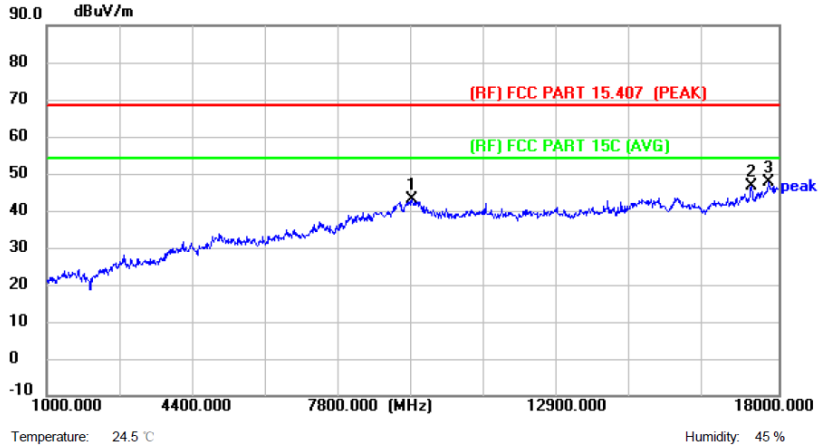

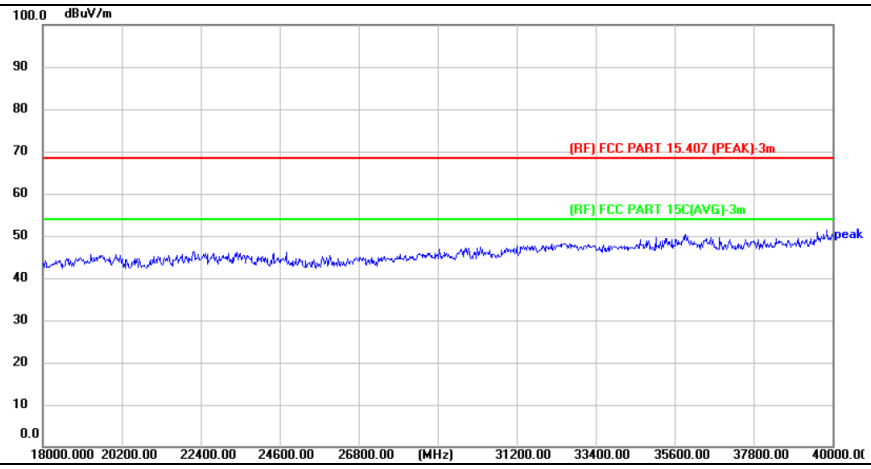

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9483.000	42.64	0.42	43.06	68.30	-25.24	peak	P
2	17371.000	40.44	6.16	46.60	68.30	-21.70	peak	P
3 *	17779.000	39.44	8.35	47.79	68.30	-20.51	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n20 Mode 5785MHz-MIMO-ANT.1+2

Vertical

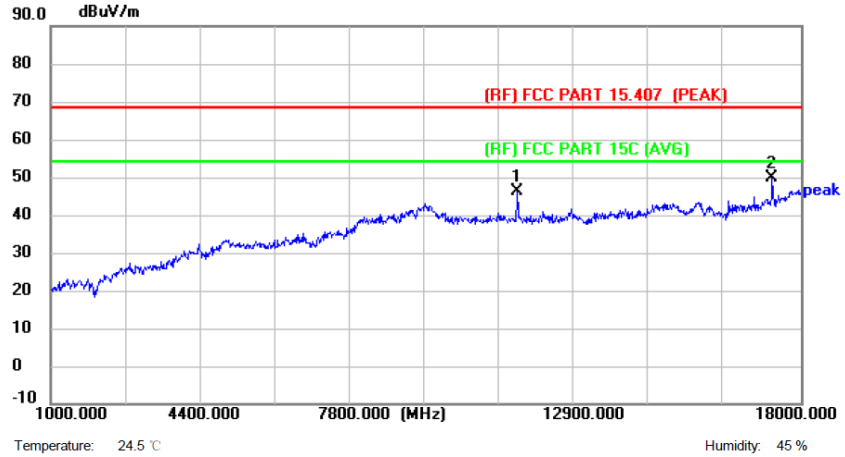

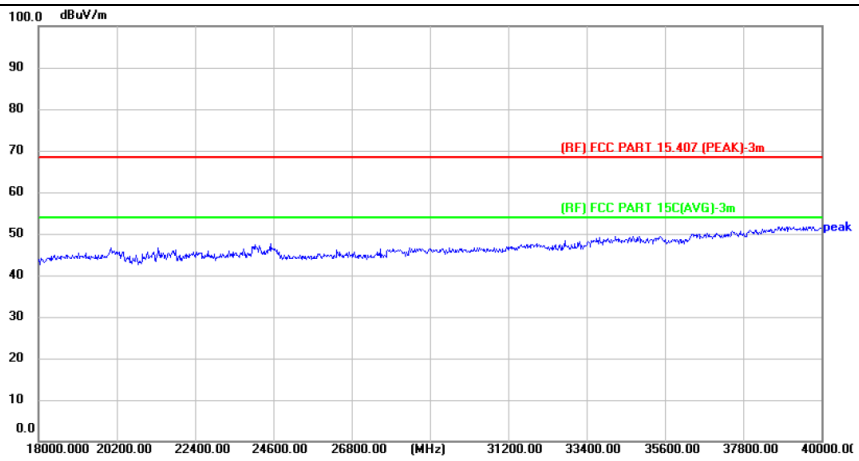

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11574.000	46.51	-0.39	46.12	68.30	-22.18	peak	P
2 *	17354.000	43.75	6.16	49.91	68.30	-18.39	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n20 Mode 5825MHz-MIMO-ANT.1+2

Horizontal

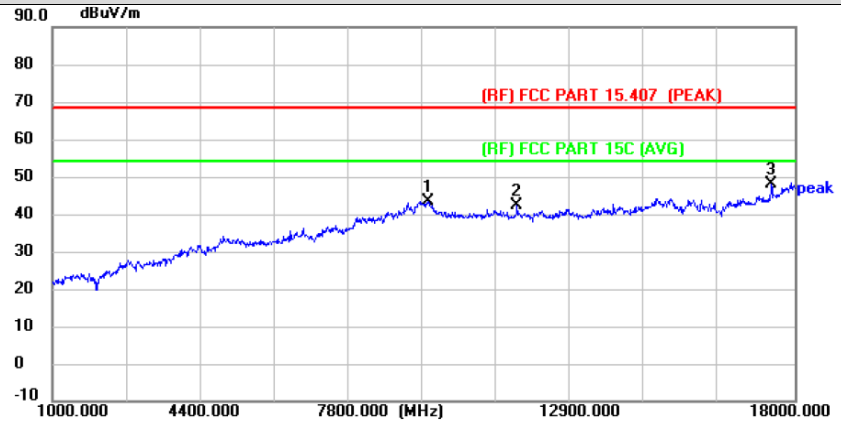

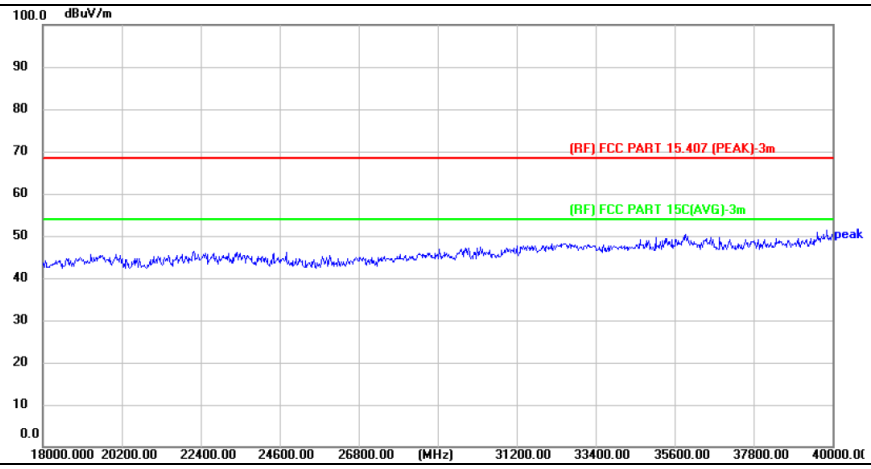

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9619.000	43.47	-0.15	43.32	68.30	-24.98	peak	P
2	11642.000	42.62	-0.37	42.25	68.30	-26.05	peak	P
3 *	17473.000	41.42	6.54	47.96	68.30	-20.34	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n20 Mode 5825MHz-MIMO-ANT.1+2

Vertical

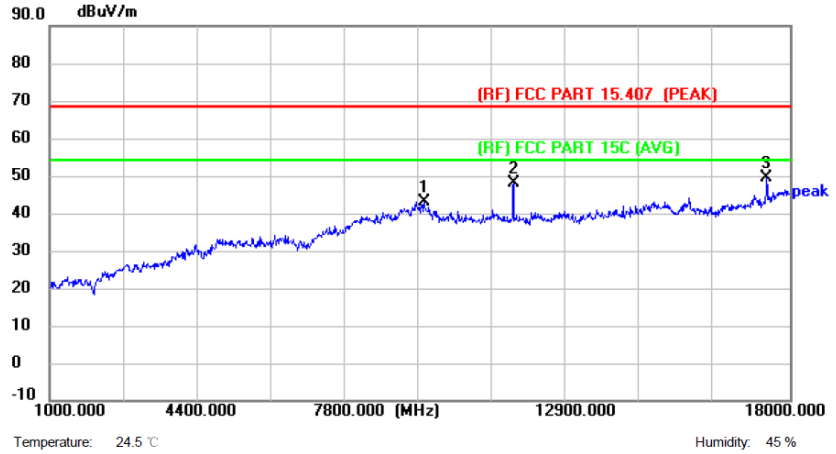

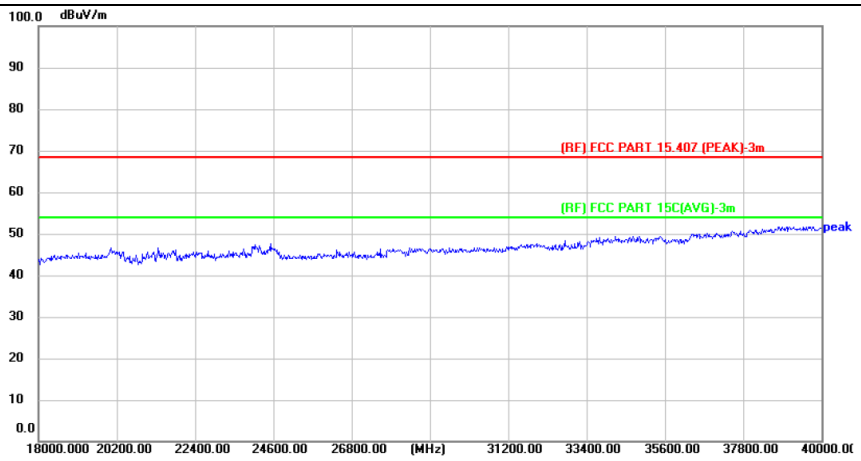

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9602.000	42.87	0.26	43.13	68.30	-25.17	peak	P
2	11659.000	48.40	-0.35	48.05	68.30	-20.25	peak	P
3 *	17473.000	42.95	6.54	49.49	68.30	-18.81	peak	P

Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value＜average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.