Appendix D

RF Test Data for 5.2GWIFI (Conducted Measurement)

Product Name: Mini PC

Test Model: MN-N1

Environmental Conditions

Temperature:	24.8° C
Relative Humidity:	53.4%
ATM Pressure:	100.0 kPa
Test Engineer:	Jose Zhu
Supervised by:	Nick Peng

D.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant0	21.873	---	Pass
NVNT	a	5200	Ant0	22.839	---	Pass
NVNT	a	5240	Ant0	23.943	---	Pass
NVNT	n20	5180	Ant0	26.511	---	Pass
NVNT	n20	5200	Ant0	26.484	---	Pass
NVNT	n20	5240	Ant0	27.914	---	Pass
NVNT	n40	5190	Ant0	39.815	---	Pass
NVNT	n40	5230	Ant0	50.205	---	Pass
NVNT	ac20	5180	Ant0	26.373	---	Pass
NVNT	ac20	5200	Ant0	24.4	---	Pass
NVNT	ac20	5240	Ant0	26.399	---	Pass
NVNT	ac40	5190	Ant0	44.65	---	Pass
NVNT	ac40	5230	Ant0	39.243	---	Pass
NVNT	ac80	5210	Ant0	79.031	---	Pass
NVNT	ax20	5180	Ant0	28.828	---	Pass
NVNT	ax20	5200	Ant0	27.901	---	Pass
NVNT	ax20	5240	Ant0	27.084	---	Pass
NVNT	ax40	5190	Ant0	44.328	---	Pass
NVNT	ax40	5230	Ant0	40.111	---	Pass
NVNT	ax80	5210	Ant0	79.256	---	Pass

Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant0

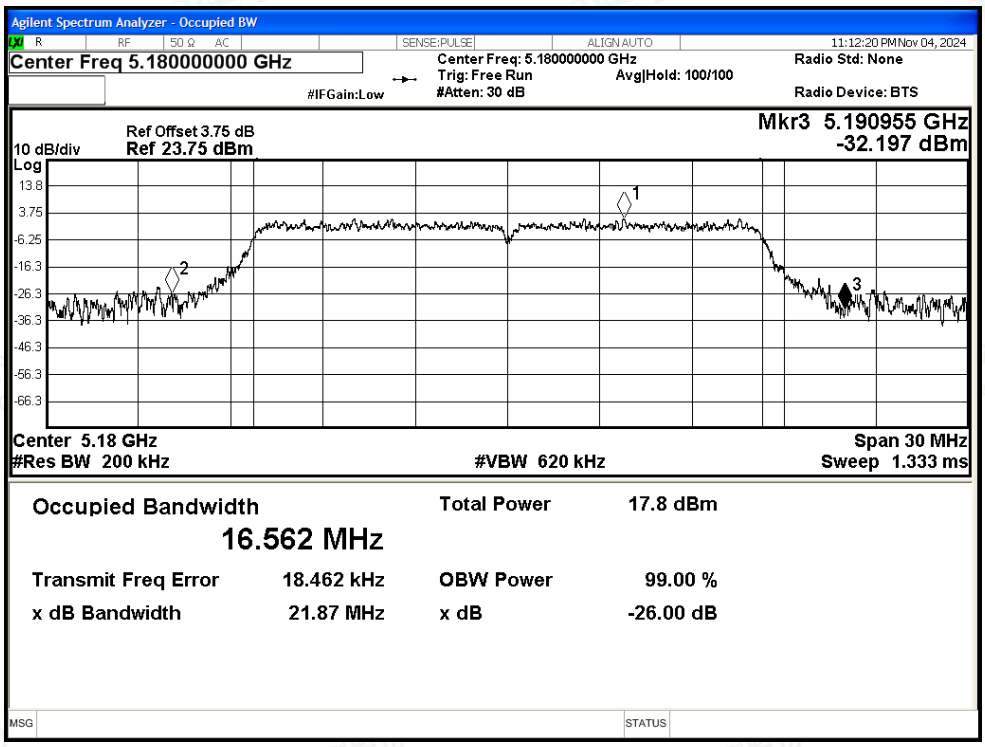

-26dB Bandwidth NVNT a 5200MHz Ant0

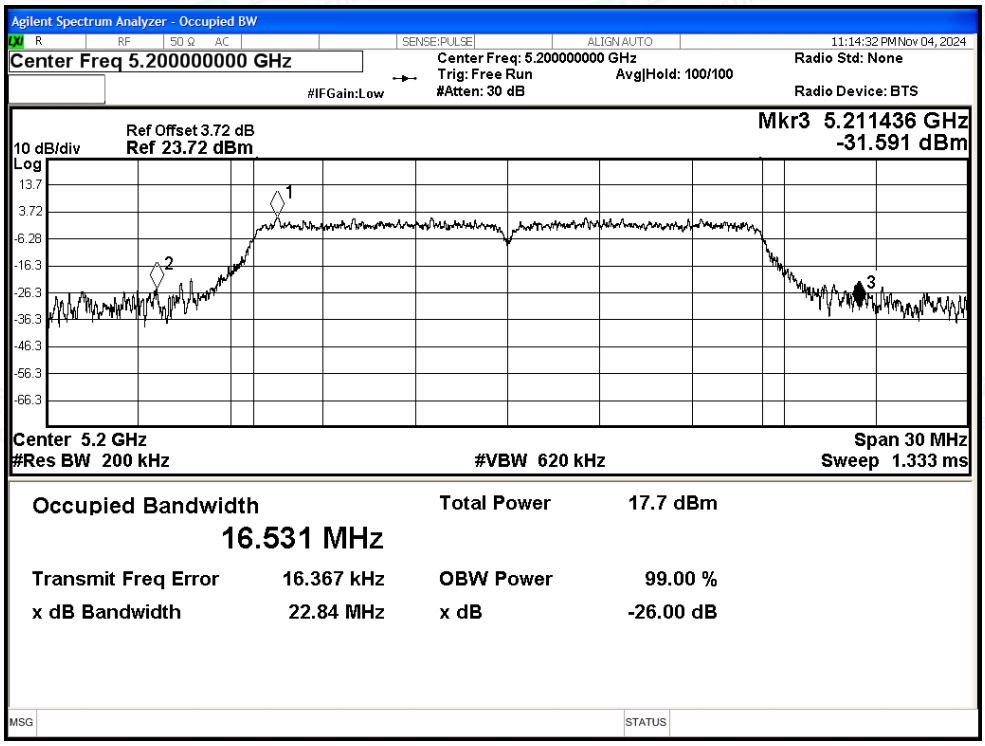

-26dB Bandwidth NVNT a 5240MHz Ant0

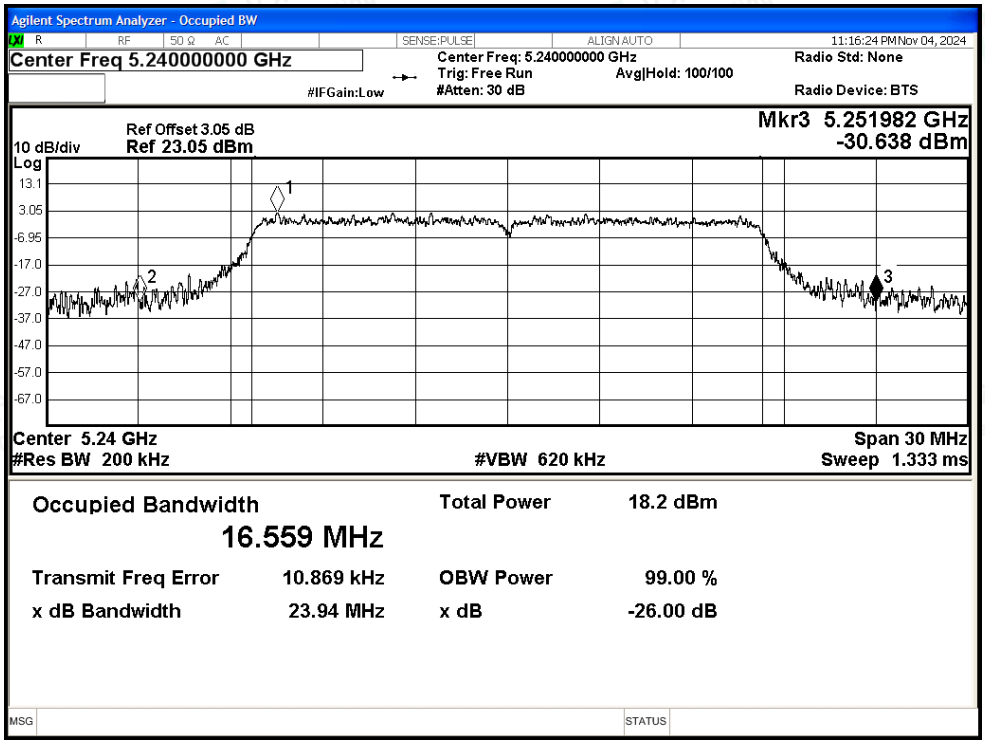

-26dB Bandwidth NVNT n20 5180MHz Ant0

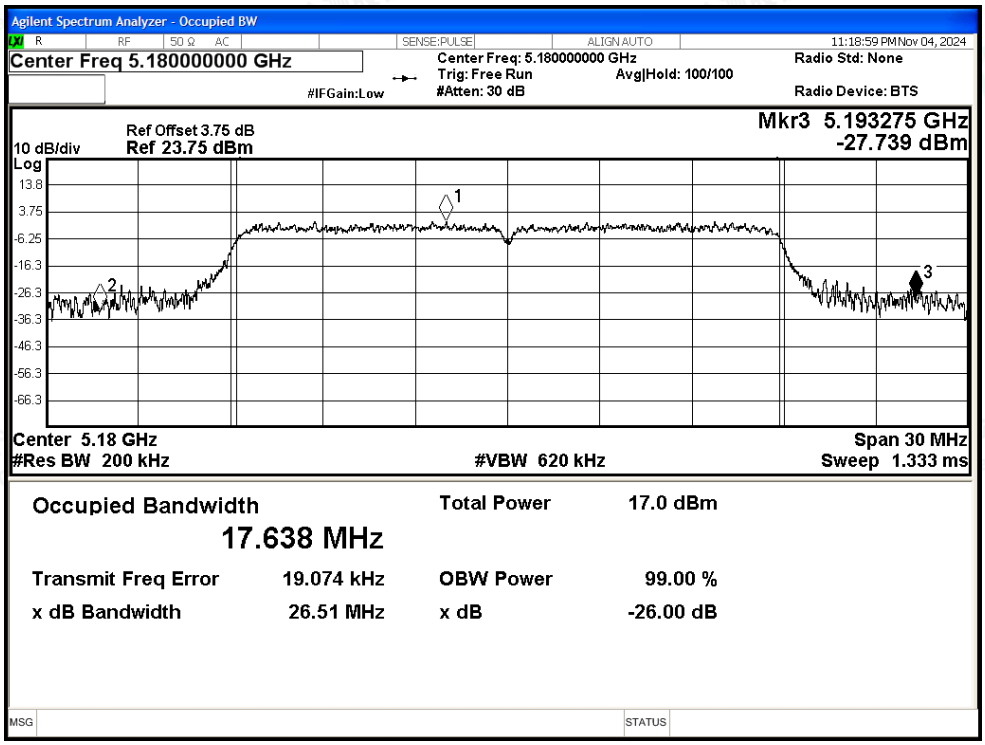

-26dB Bandwidth NVNT n20 5200MHz Ant0

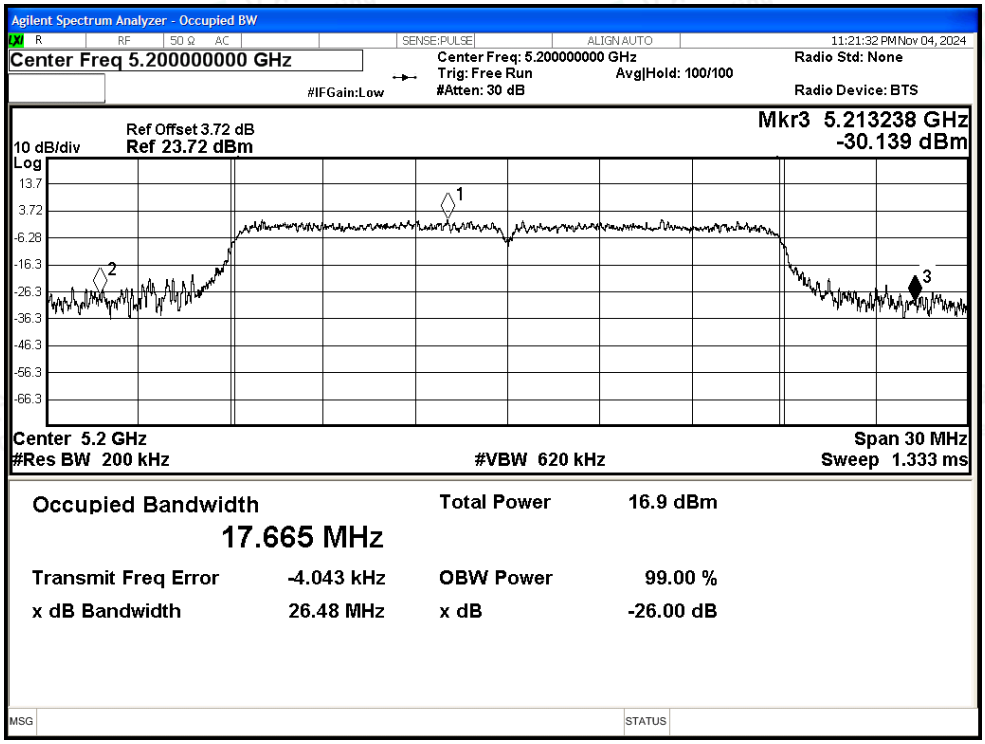

-26dB Bandwidth NVNT n20 5240MHz Ant0

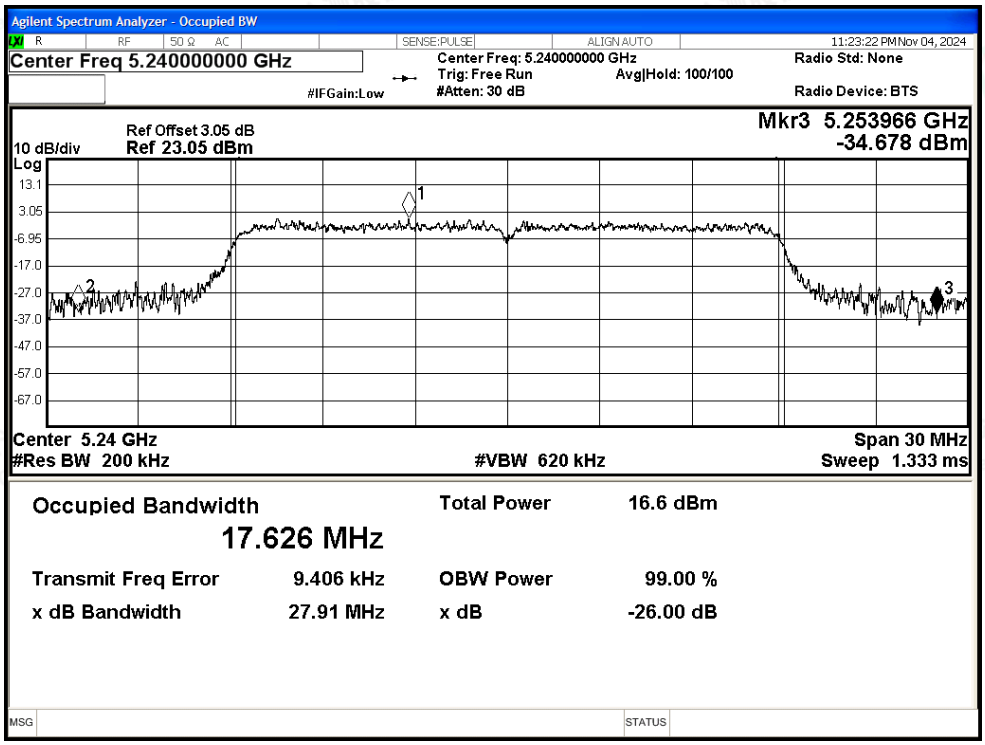

-26dB Bandwidth NVNT n40 5190MHz Ant0

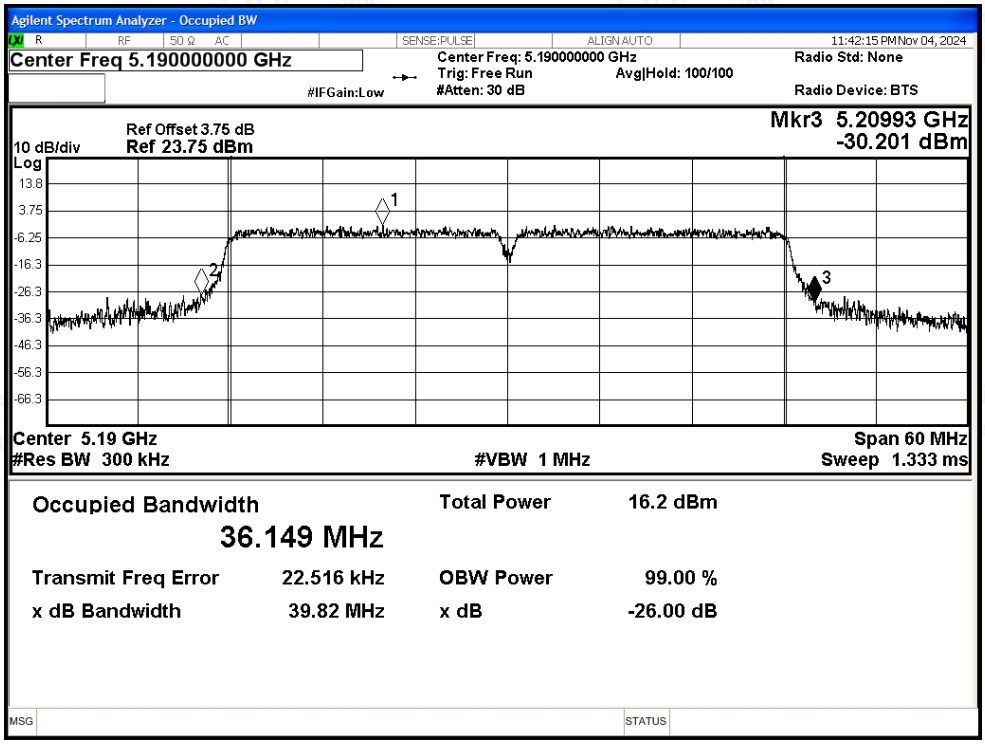

-26dB Bandwidth NVNT n40 5230MHz Ant0

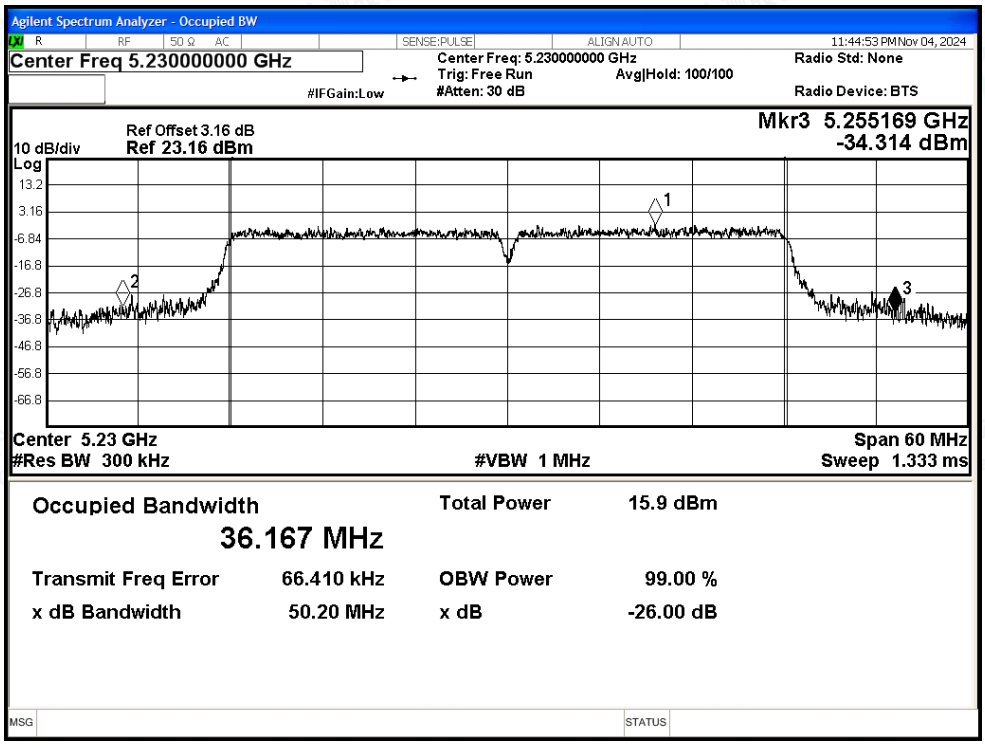

-26dB Bandwidth NVNT ac20 5180MHz Ant0

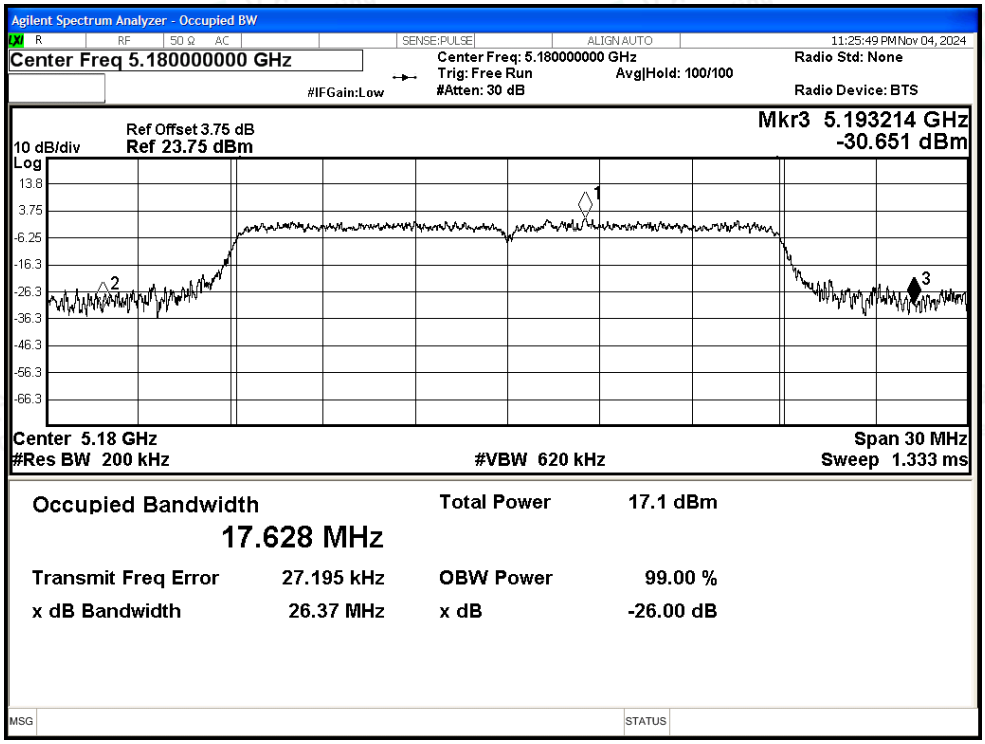

-26dB Bandwidth NVNT ac20 5200MHz Ant0

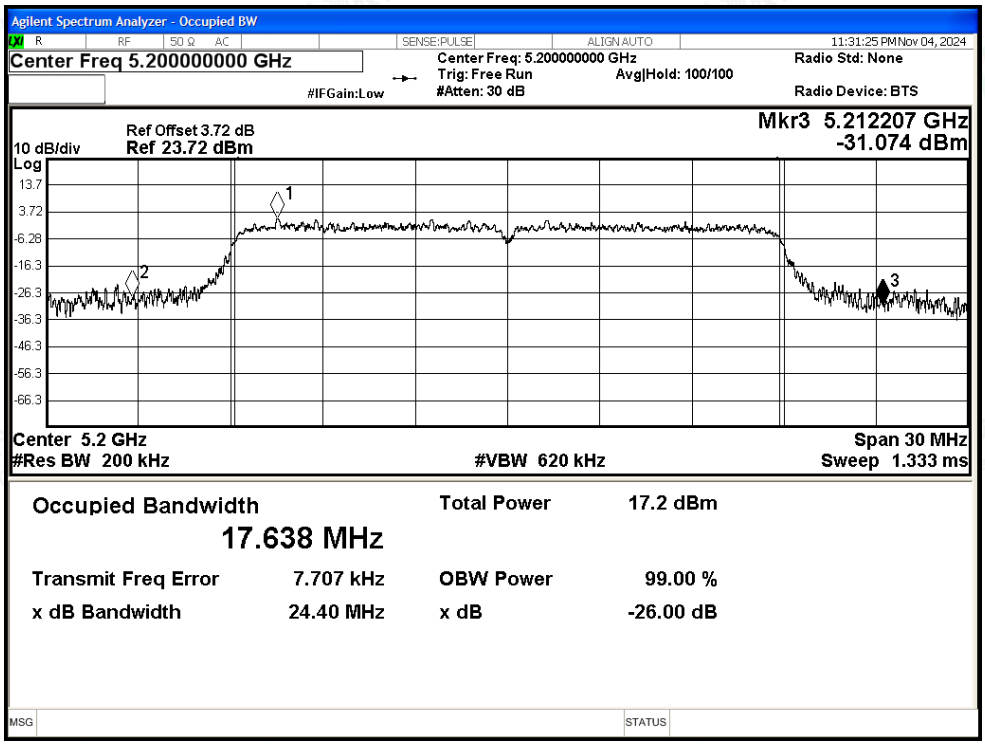

-26dB Bandwidth NVNT ac20 5240MHz Ant0

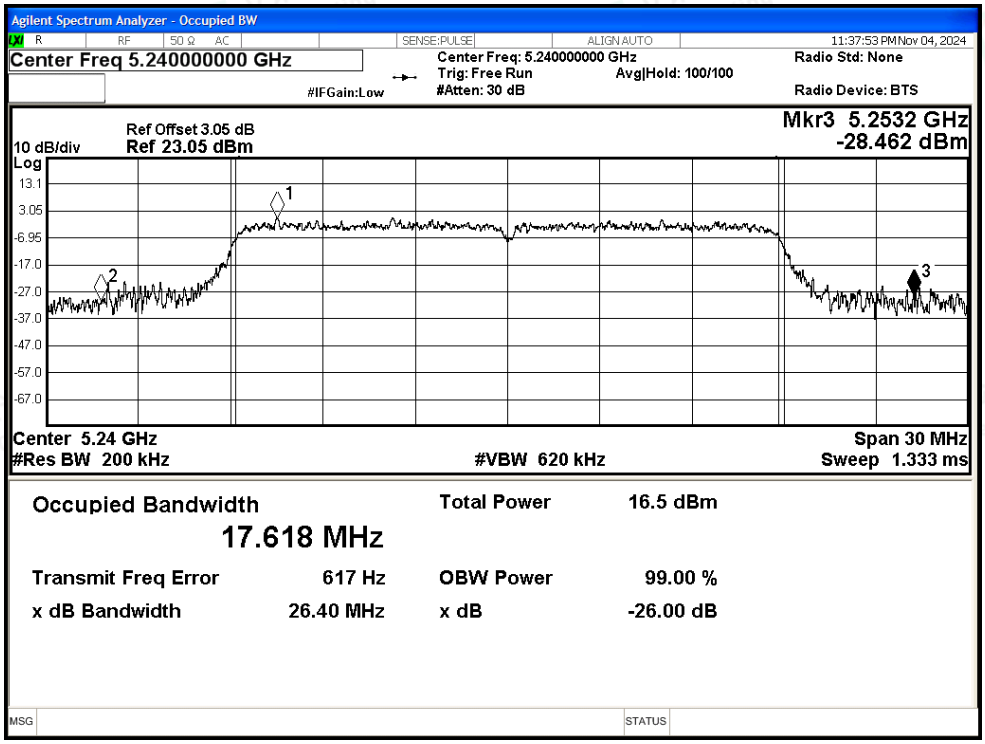

-26dB Bandwidth NVNT ac40 5190MHz Ant0

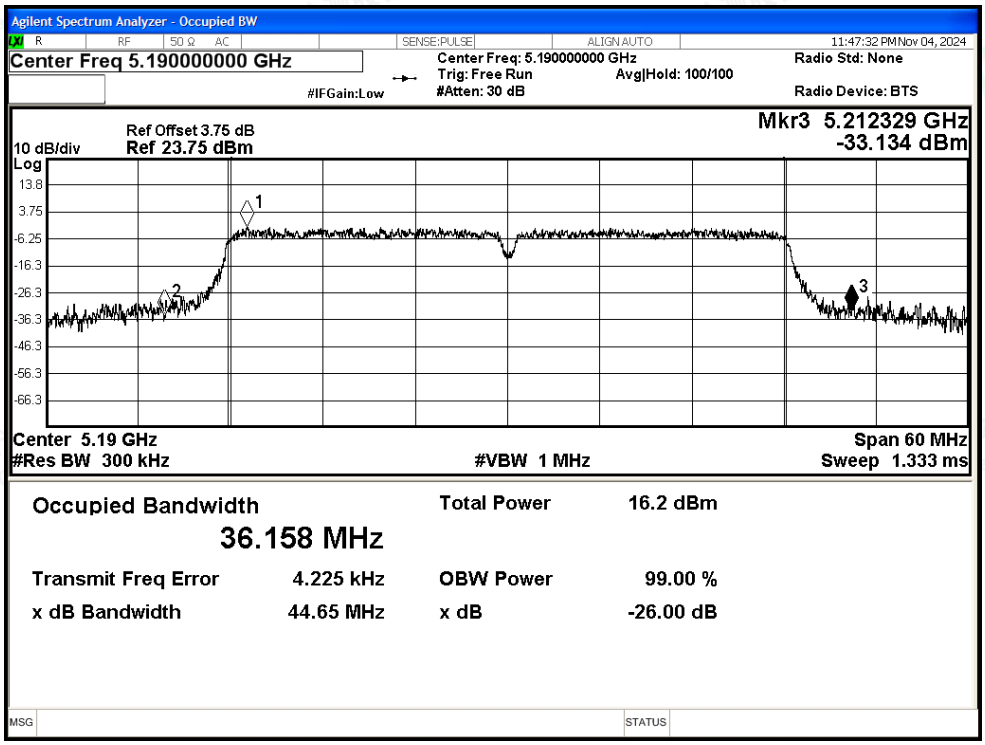

-26dB Bandwidth NVNT ac40 5230MHz Ant0

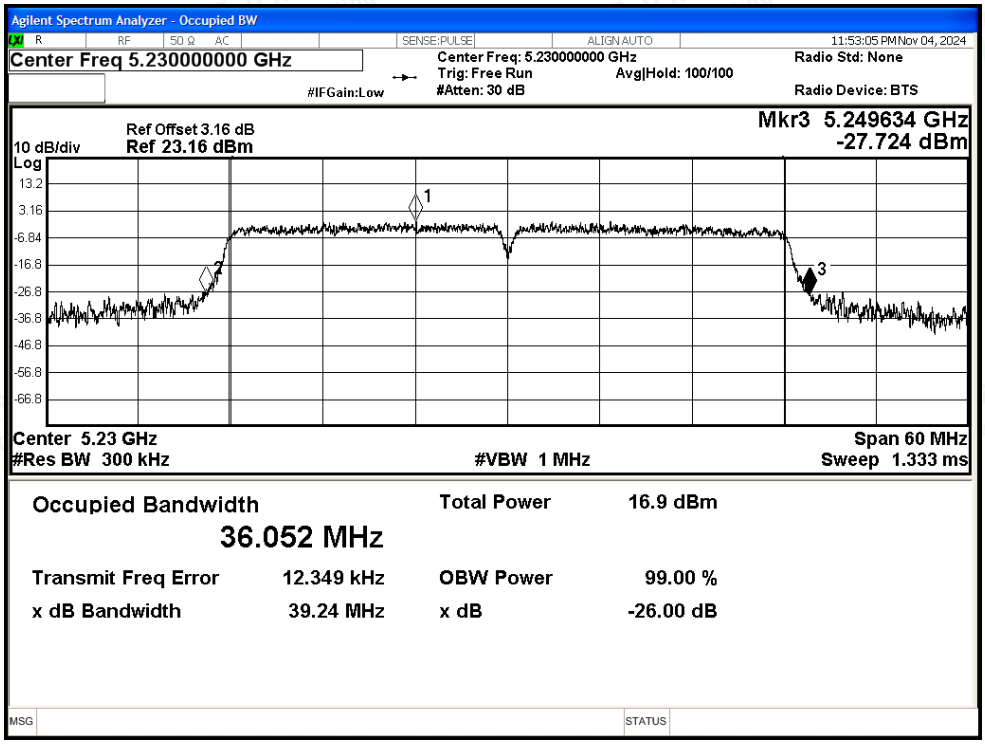

-26dB Bandwidth NVNT ac80 5210MHz Ant0

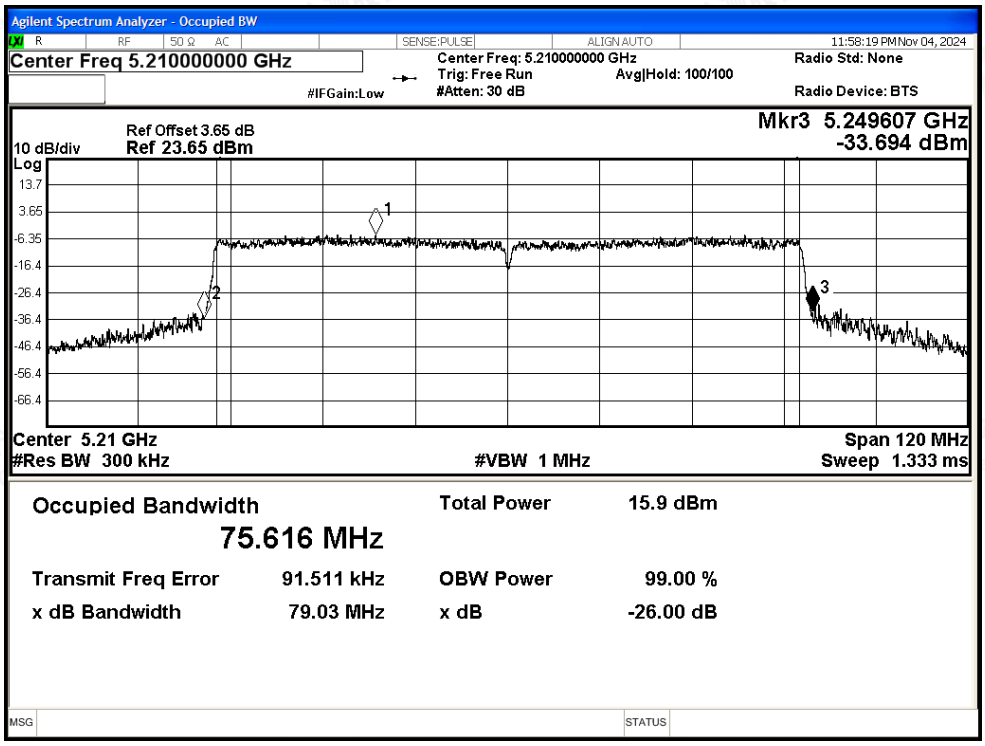

-26dB Bandwidth NVNT ax20 5180MHz Ant0

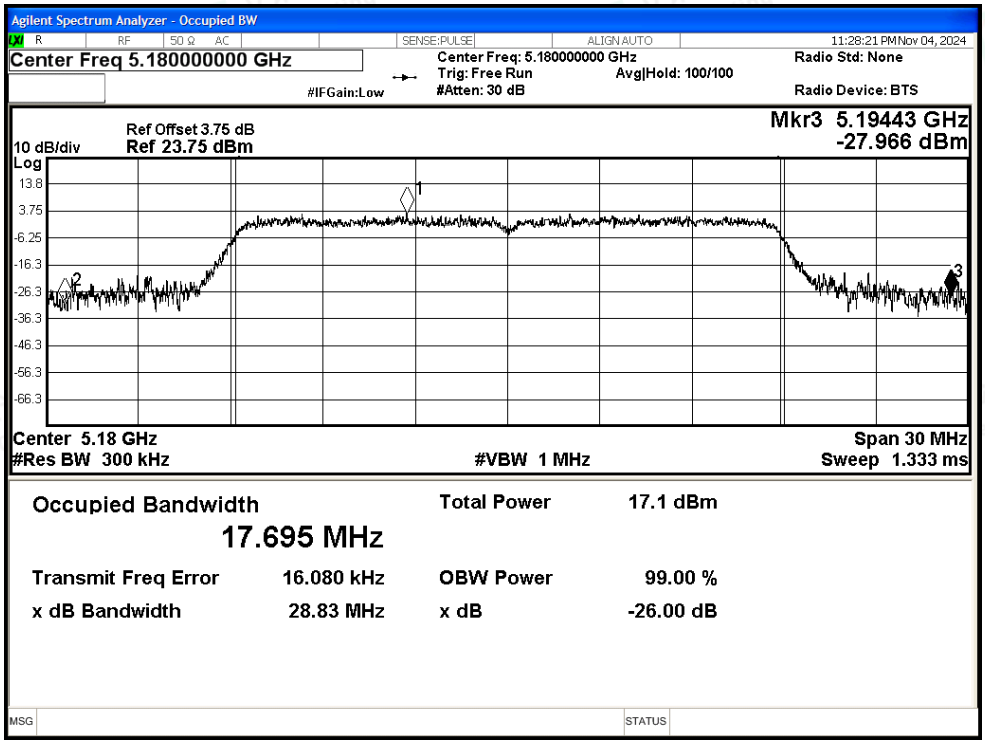

-26dB Bandwidth NVNT ax20 5200MHz Ant0

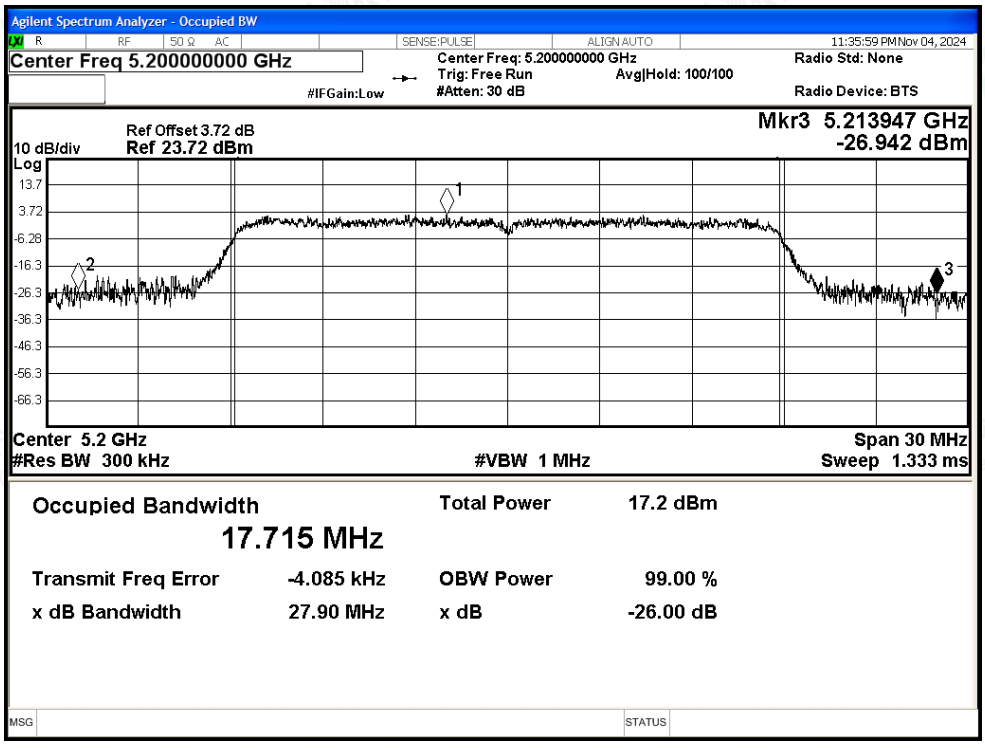

-26dB Bandwidth NVNT ax20 5240MHz Ant0

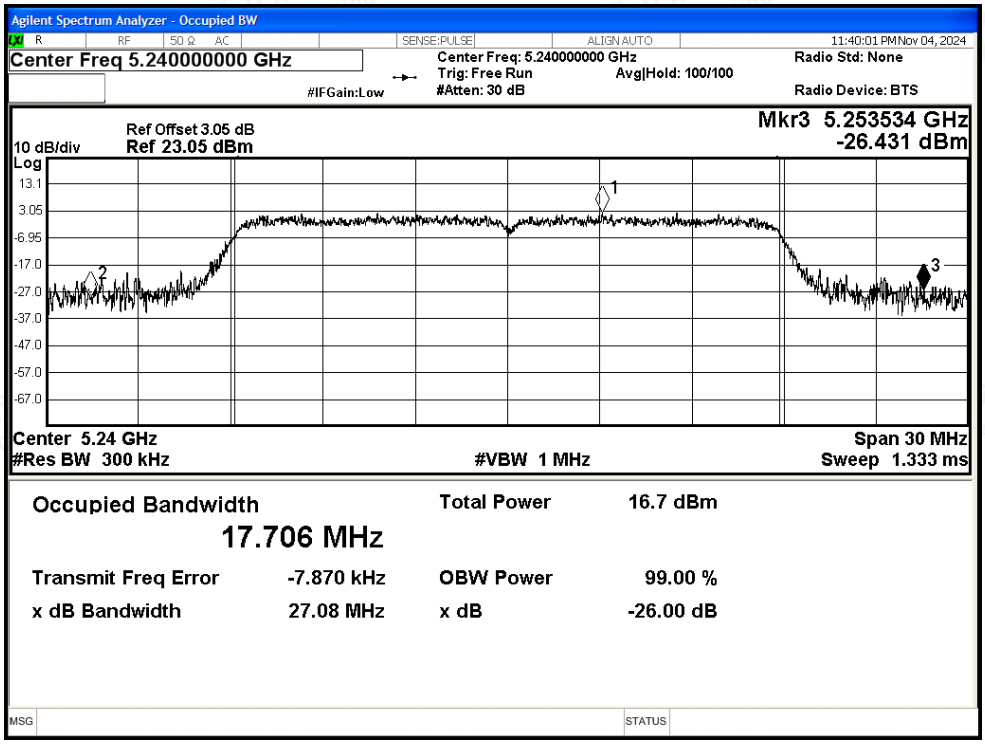

-26dB Bandwidth NVNT ax40 5190MHz Ant0

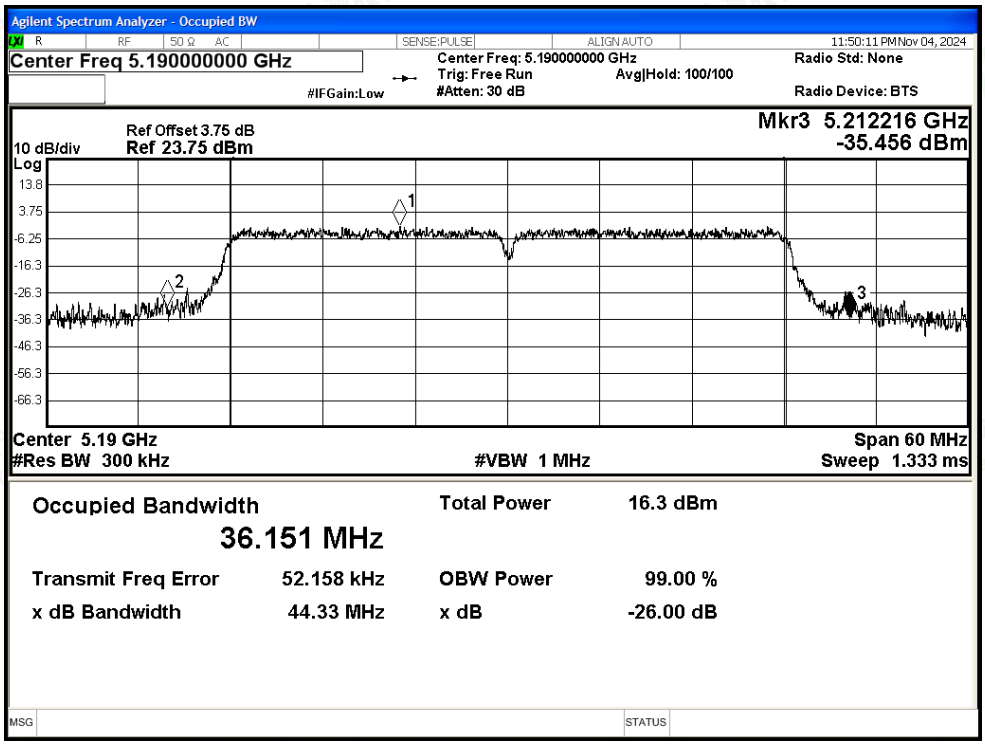

-26dB Bandwidth NVNT ax40 5230MHz Ant0

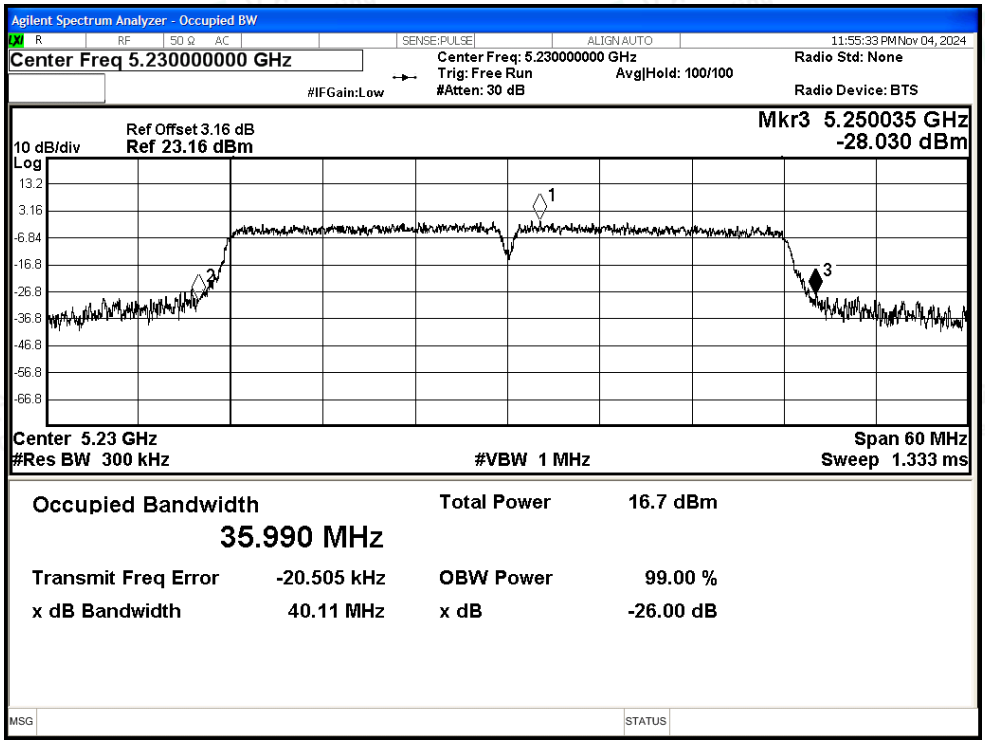

-26dB Bandwidth NVNT ax80 5210MHz Ant0

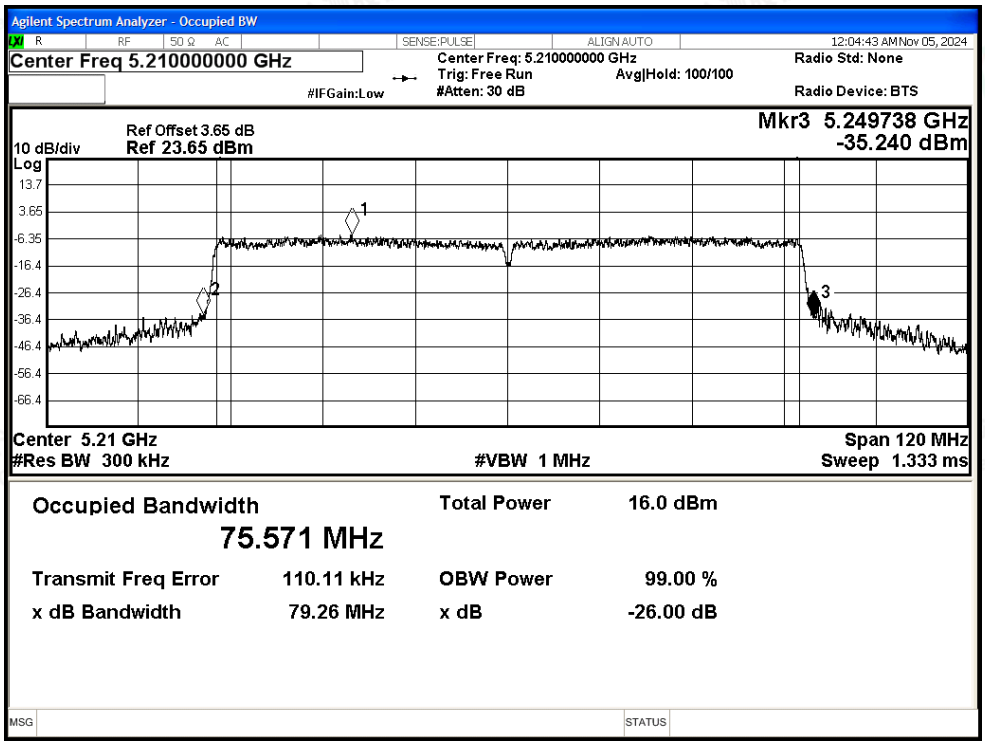

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	24.033	---	Pass
NVNT	a	5200	Ant1	21.02	---	Pass
NVNT	a	5240	Ant1	22.561	---	Pass
NVNT	n20	5180	Ant1	27.544	---	Pass
NVNT	n20	5200	Ant1	25.806	---	Pass
NVNT	n20	5240	Ant1	27.874	---	Pass
NVNT	n40	5190	Ant1	41.952	---	Pass
NVNT	n40	5230	Ant1	39.898	---	Pass
NVNT	ac20	5180	Ant1	28.259	---	Pass
NVNT	ac20	5200	Ant1	26.621	---	Pass
NVNT	ac20	5240	Ant1	25.517	---	Pass
NVNT	ac40	5190	Ant1	39.343	---	Pass
NVNT	ac40	5230	Ant1	44.144	---	Pass
NVNT	ac80	5210	Ant1	78.113	---	Pass
NVNT	ax20	5180	Ant1	28.67	---	Pass
NVNT	ax20	5200	Ant1	29.204	---	Pass
NVNT	ax20	5240	Ant1	29.113	---	Pass
NVNT	ax40	5190	Ant1	41.838	---	Pass
NVNT	ax40	5230	Ant1	42.838	---	Pass
NVNT	ax80	5210	Ant1	78.741	---	Pass

Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1

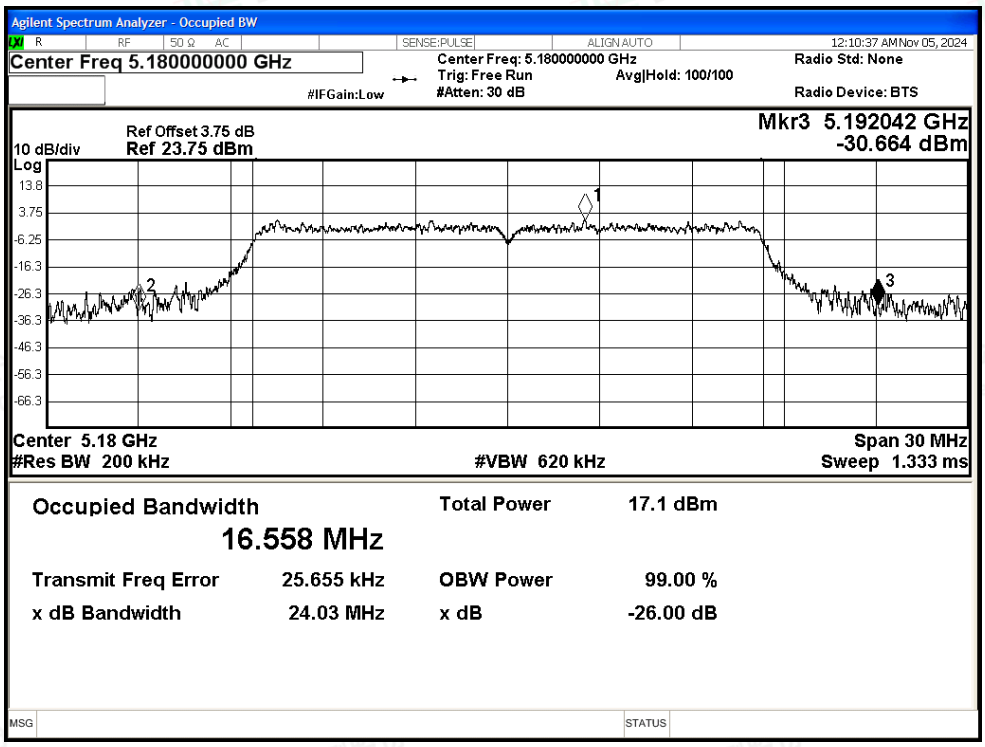

-26dB Bandwidth NVNT a 5200MHz Ant1

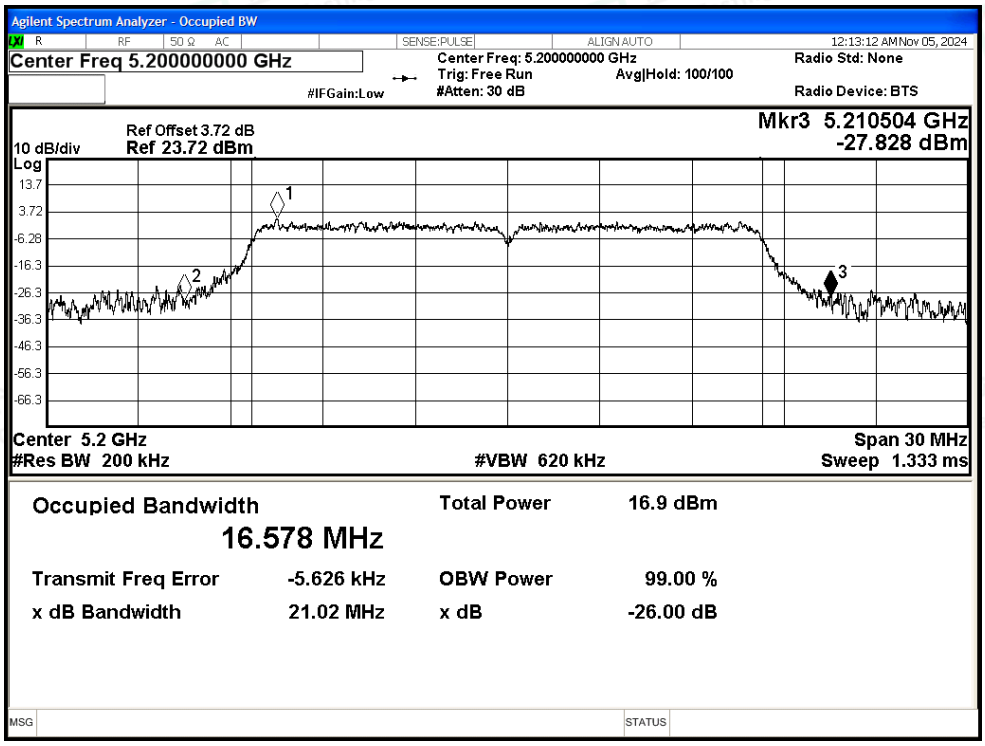

-26dB Bandwidth NVNT a 5240MHz Ant1

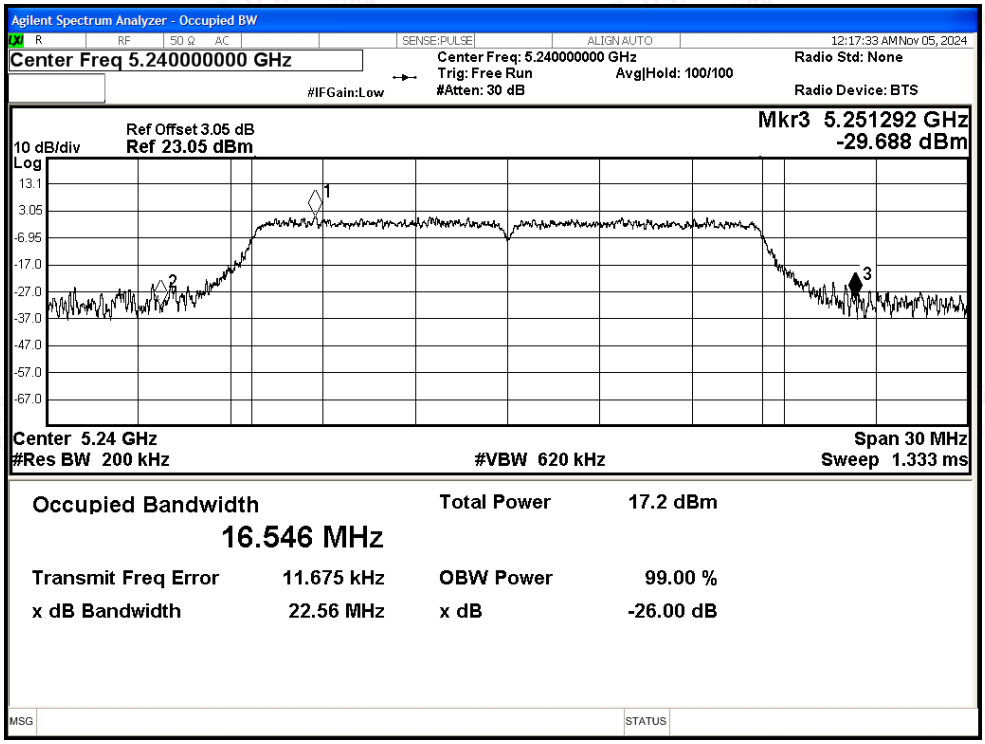

-26dB Bandwidth NVNT n20 5180MHz Ant1

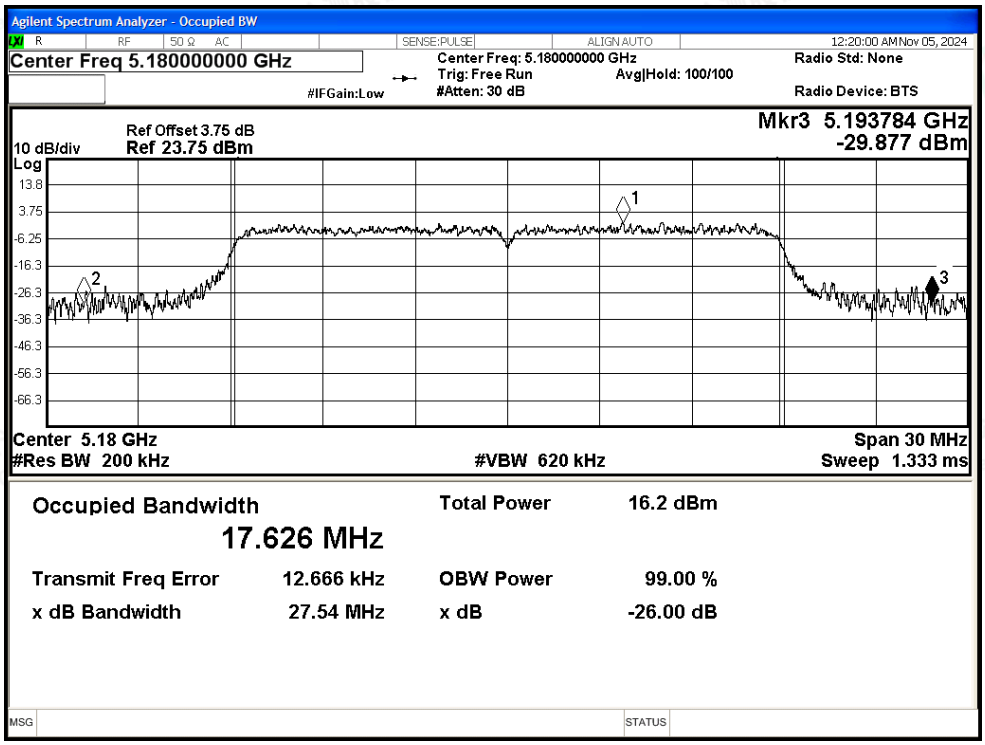

-26dB Bandwidth NVNT n20 5200MHz Ant1

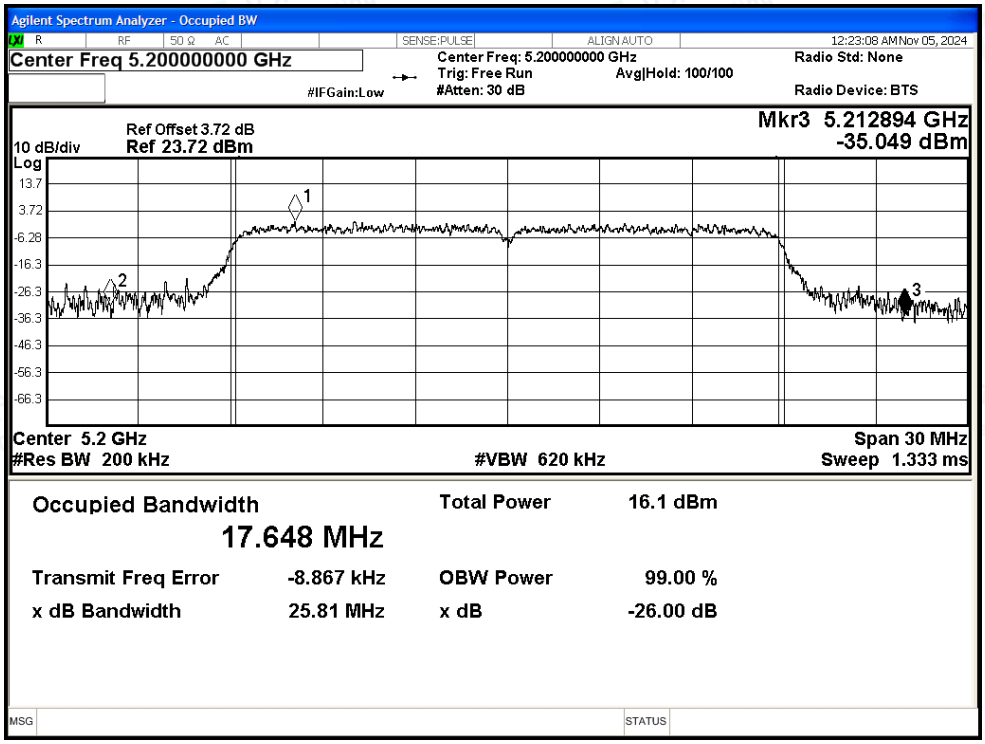

-26dB Bandwidth NVNT n20 5240MHz Ant1

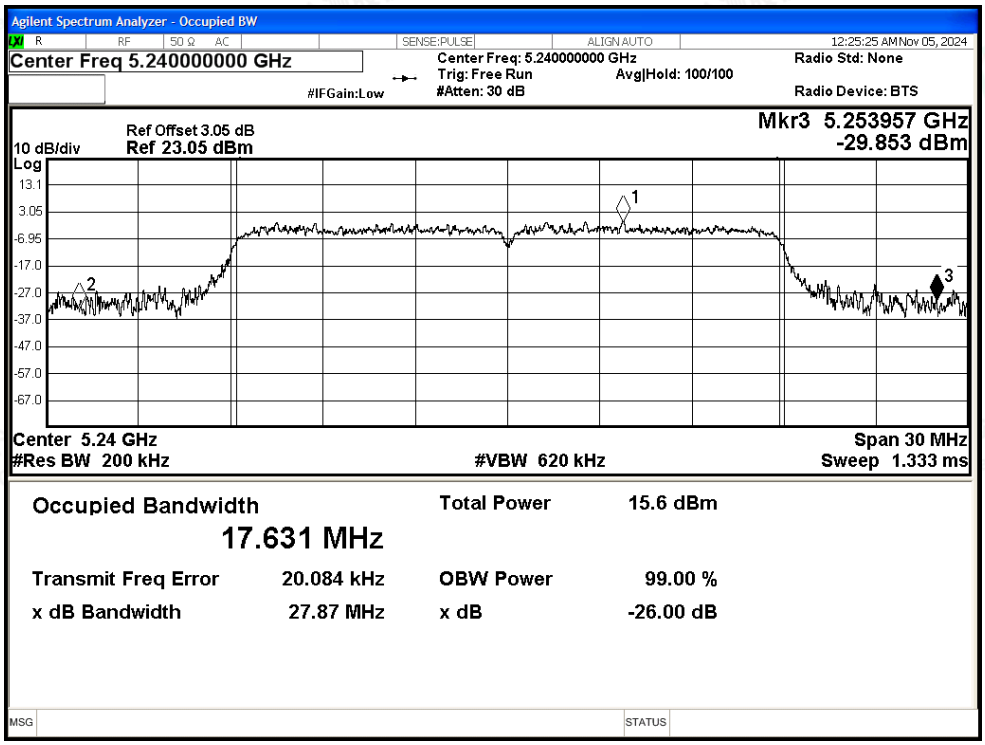

-26dB Bandwidth NVNT n40 5190MHz Ant1

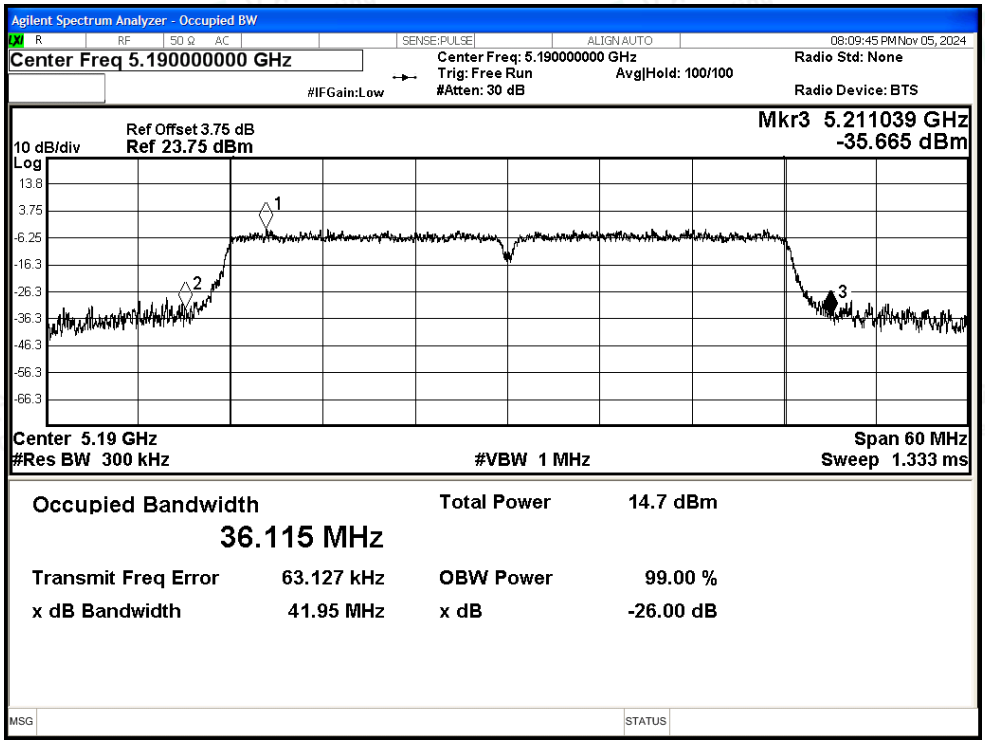

-26dB Bandwidth NVNT n40 5230MHz Ant1

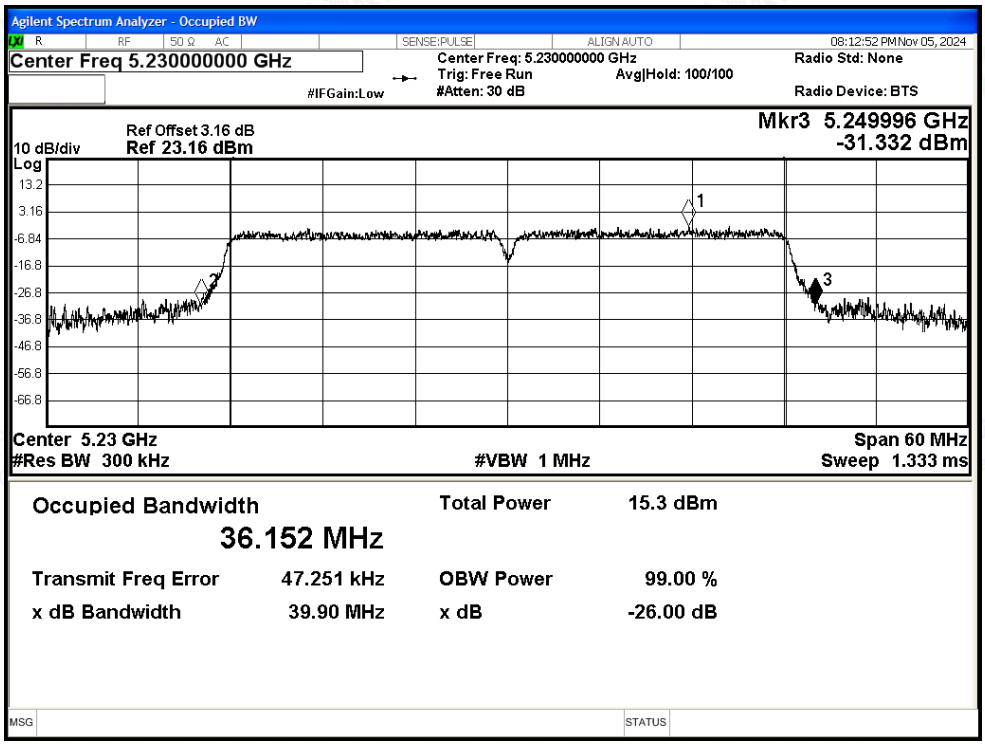

-26dB Bandwidth NVNT ac20 5180MHz Ant1

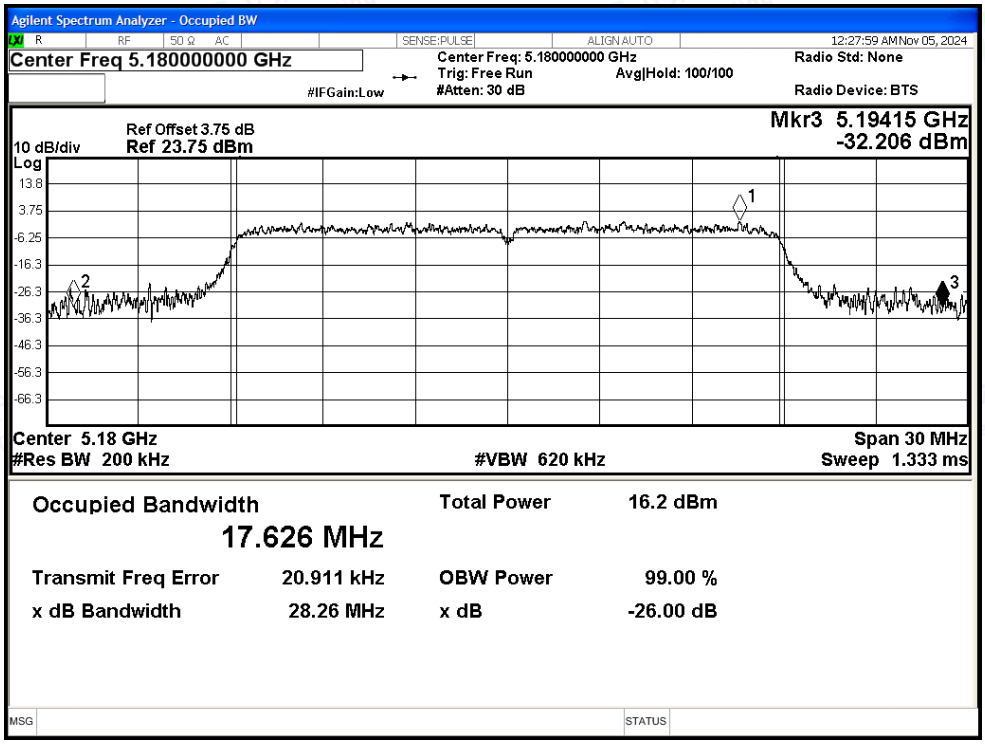

-26dB Bandwidth NVNT ac20 5200MHz Ant1

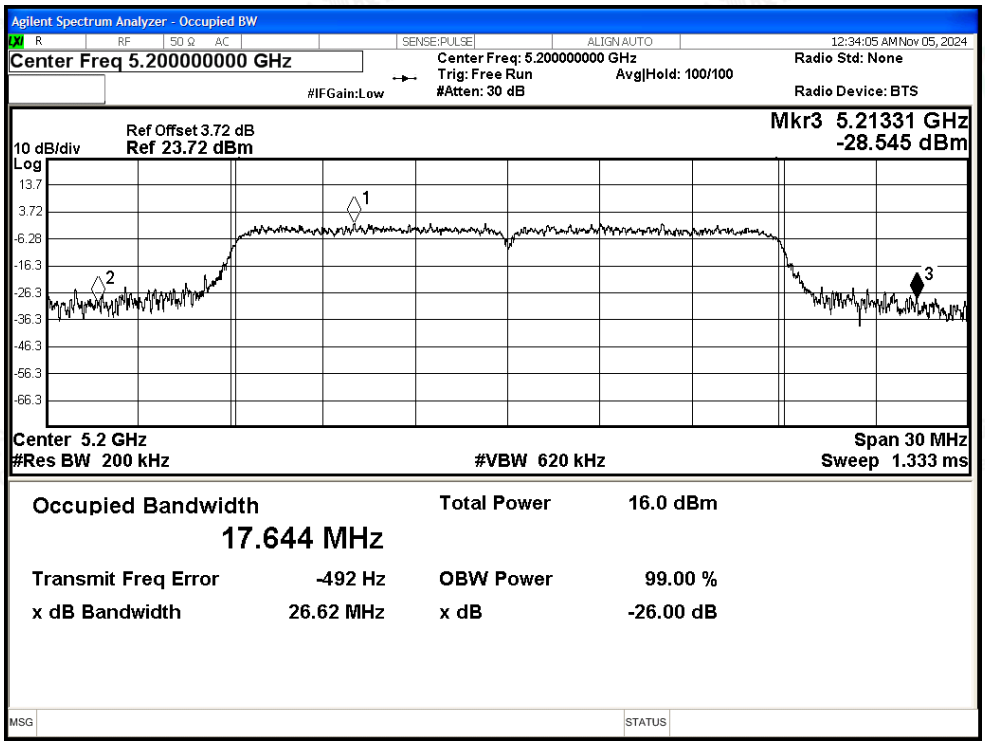

-26dB Bandwidth NVNT ac20 5240MHz Ant1

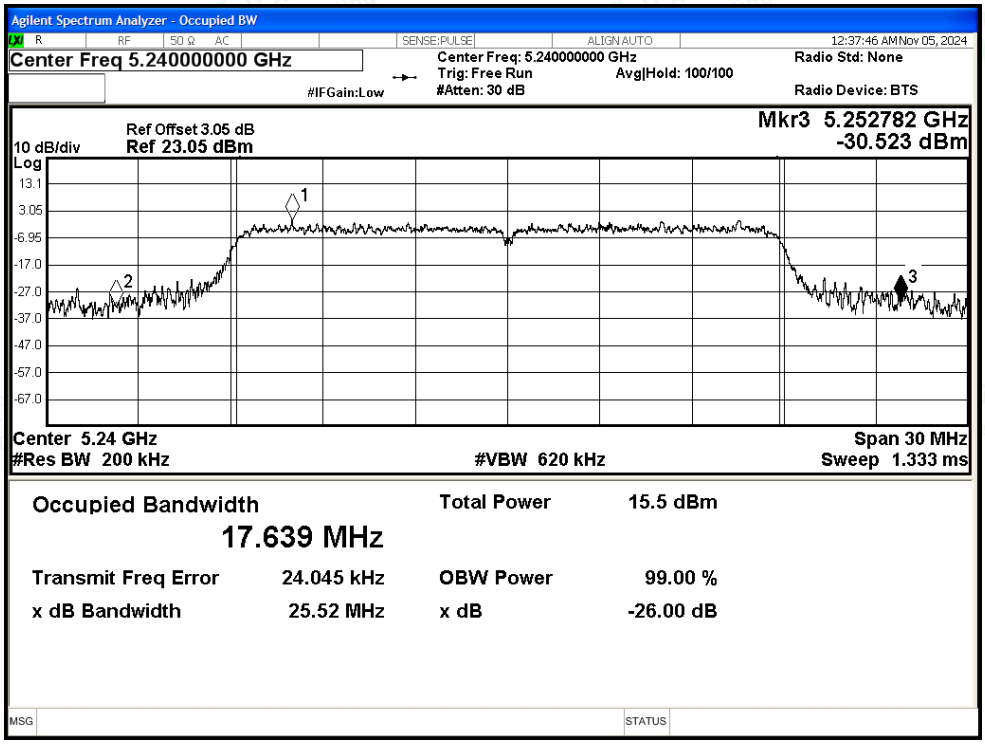

-26dB Bandwidth NVNT ac40 5190MHz Ant1

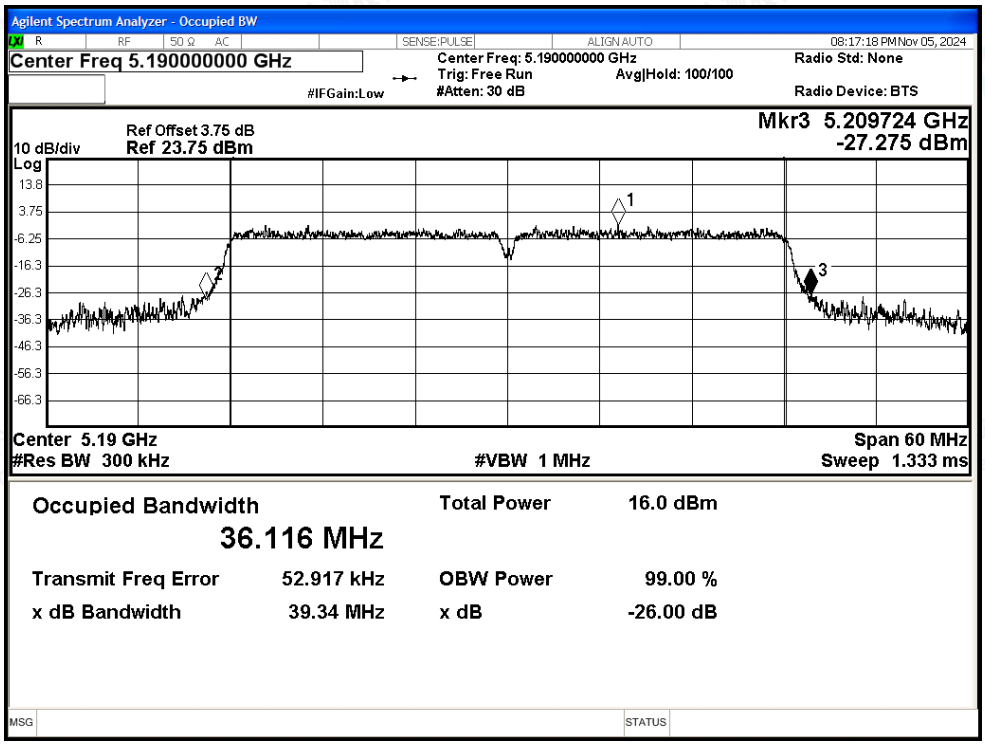

-26dB Bandwidth NVNT ac40 5230MHz Ant1

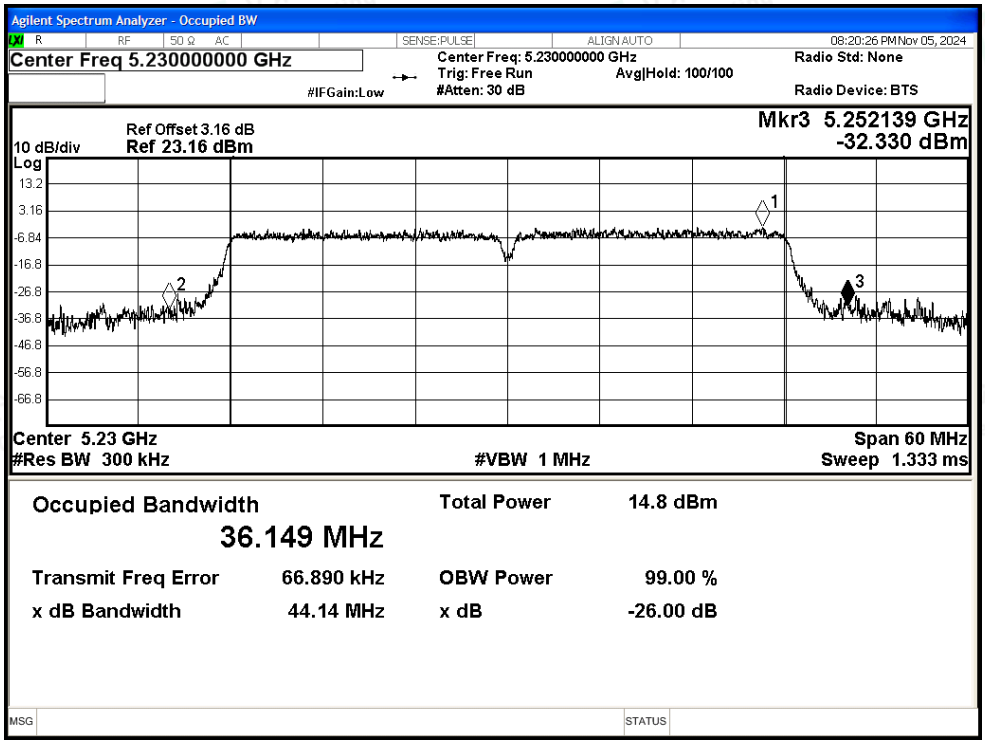

-26dB Bandwidth NVNT ac80 5210MHz Ant1

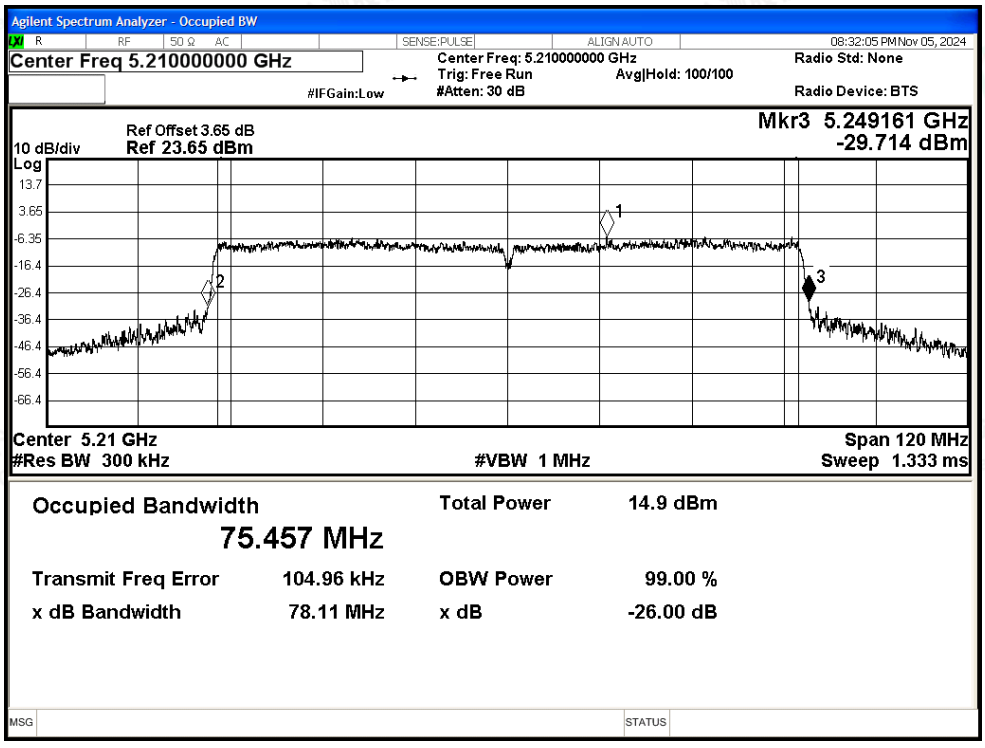

-26dB Bandwidth NVNT ax20 5180MHz Ant1

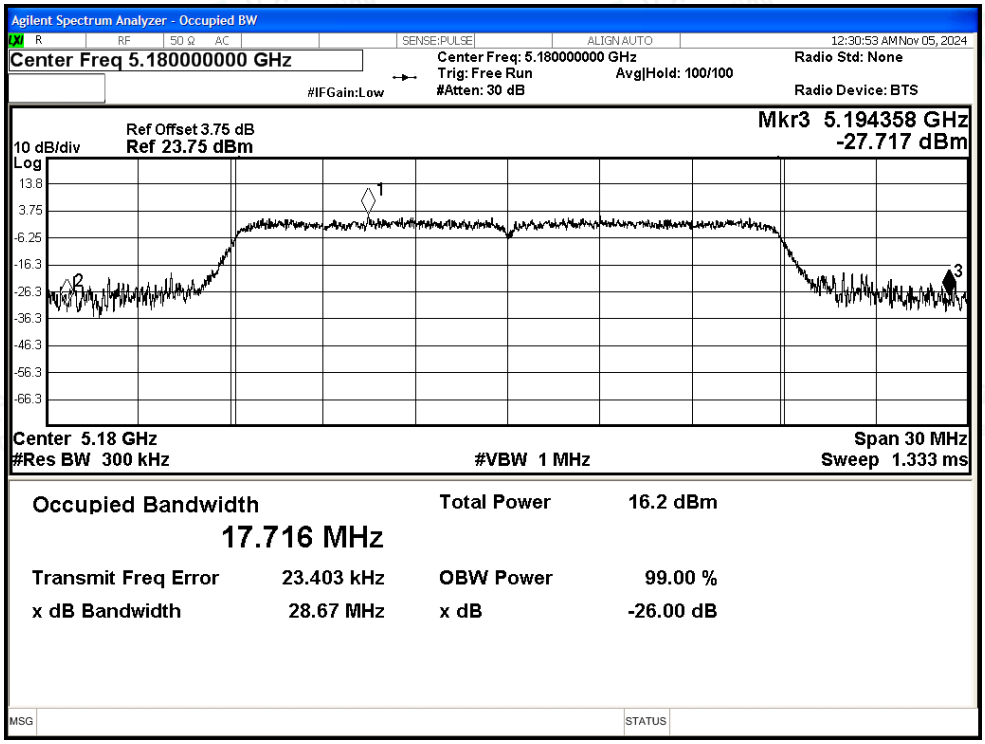

-26dB Bandwidth NVNT ax20 5200MHz Ant1

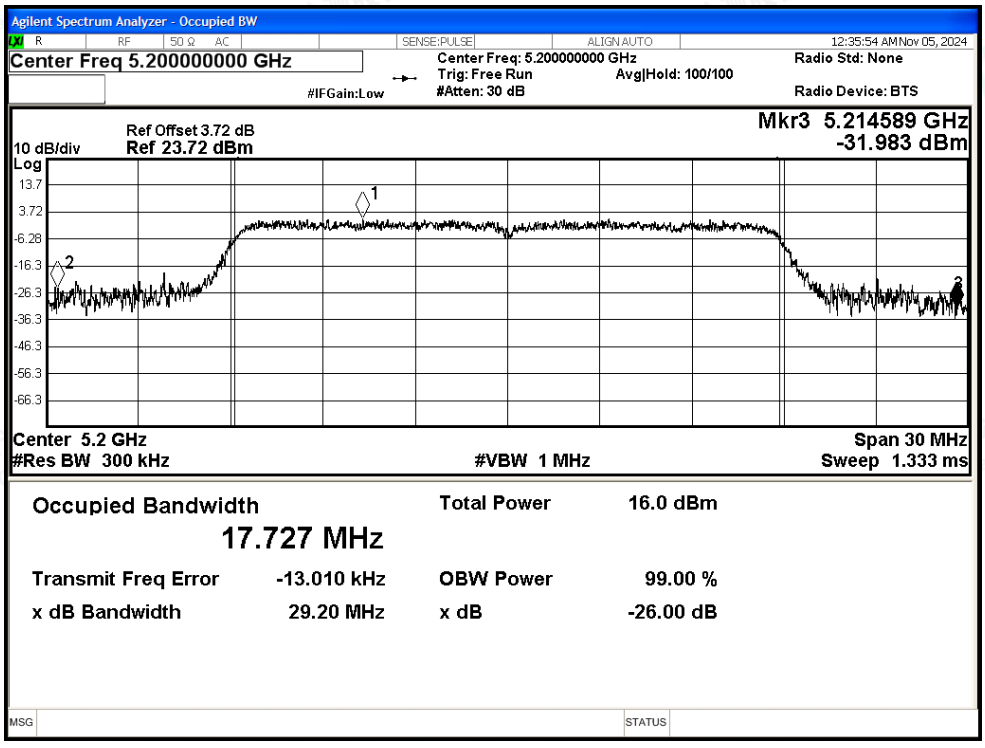

-26dB Bandwidth NVNT ax20 5240MHz Ant1

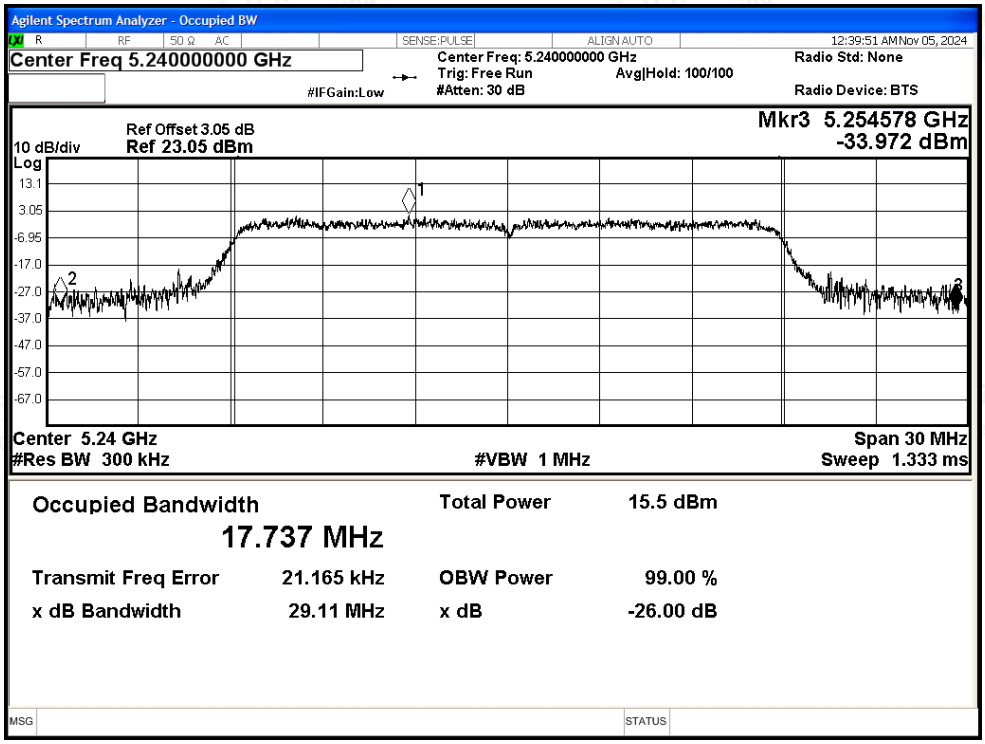

-26dB Bandwidth NVNT ax40 5190MHz Ant1

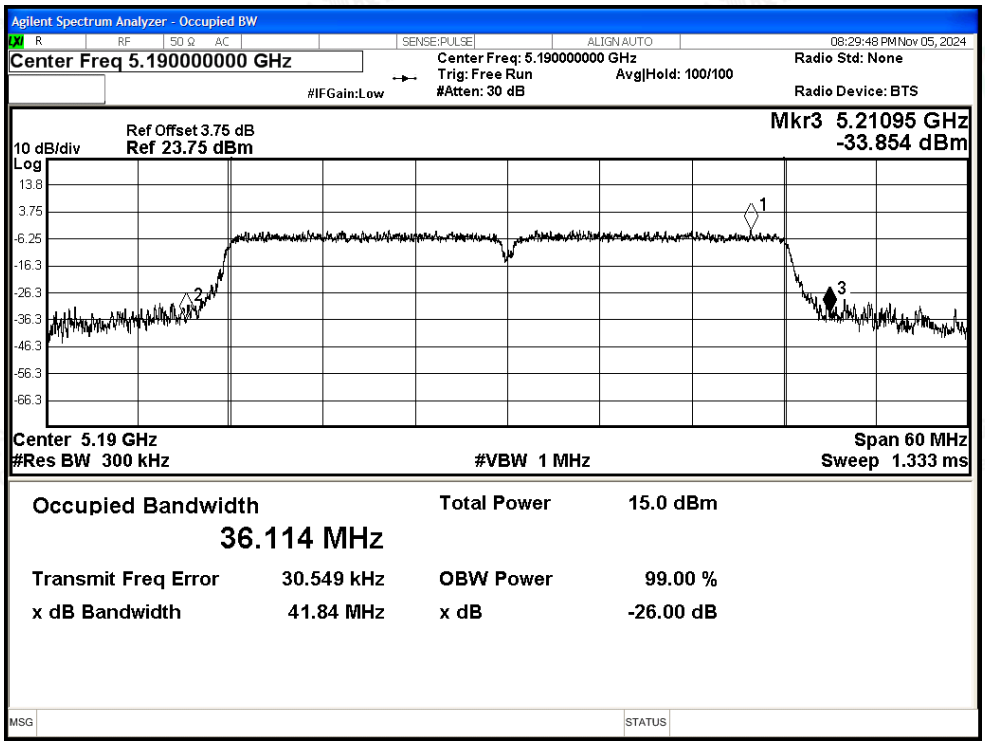

-26dB Bandwidth NVNT ax40 5230MHz Ant1

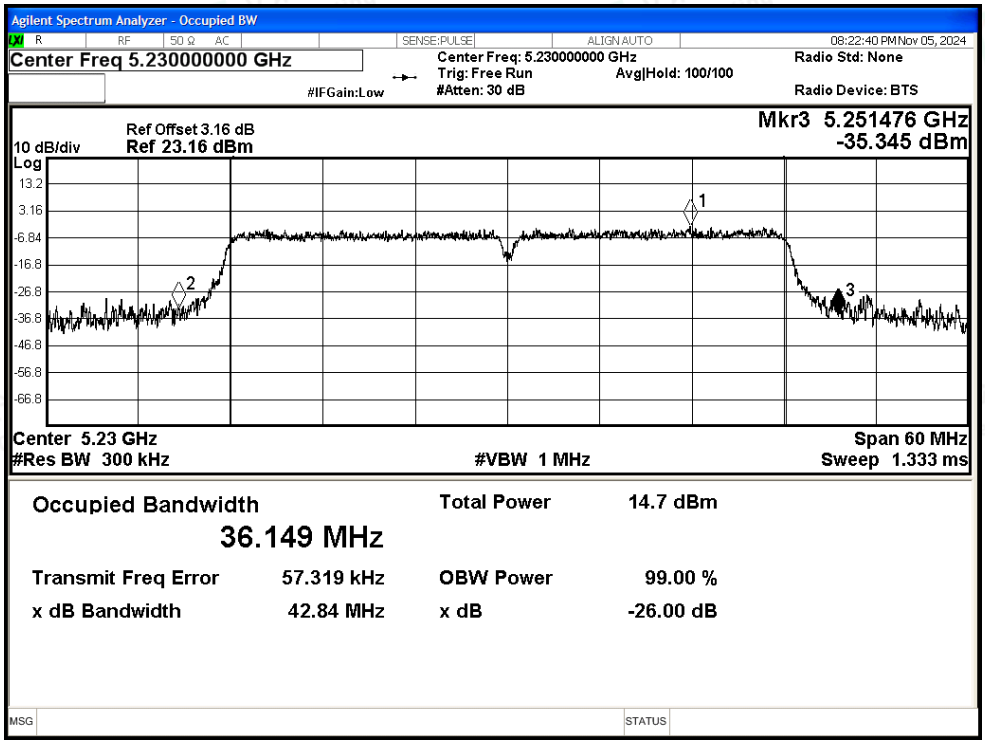

-26dB Bandwidth NVNT ax80 5210MHz Ant1

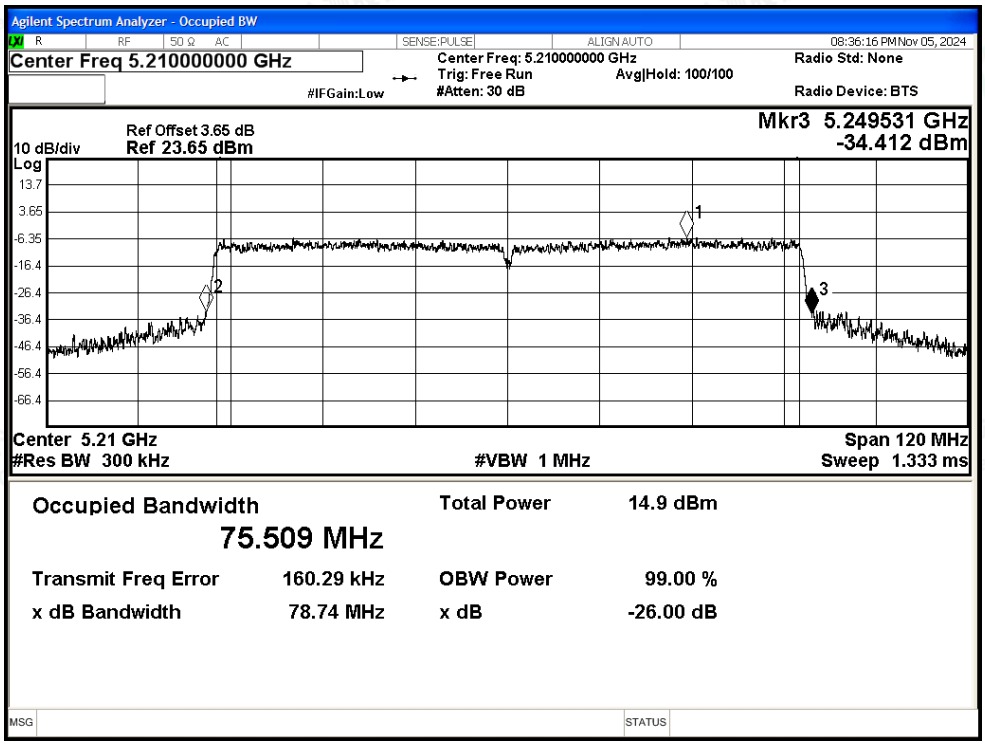

D.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant0	11.95	0.24	12.19	24	Pass
NVNT	a	5200	Ant0	11.94	0.24	12.18	24	Pass
NVNT	a	5240	Ant0	12.38	0.24	12.62	24	Pass
NVNT	n20	5180	Ant0	11.49	0.12	11.61	24	Pass
NVNT	n20	5200	Ant0	11.48	0.12	11.6	24	Pass
NVNT	n20	5240	Ant0	11.05	0.12	11.17	24	Pass
NVNT	n40	5190	Ant0	10.35	0.24	10.59	24	Pass
NVNT	n40	5230	Ant0	9.83	0.23	10.06	24	Pass
NVNT	ac20	5180	Ant0	11.55	0.12	11.67	24	Pass
NVNT	ac20	5200	Ant0	11.65	0.12	11.77	24	Pass
NVNT	ac20	5240	Ant0	10.95	0.12	11.07	24	Pass
NVNT	ac40	5190	Ant0	10.41	0.24	10.65	24	Pass
NVNT	ac40	5230	Ant0	10.87	0.24	11.11	24	Pass
NVNT	ac80	5210	Ant0	9.9	0.25	10.15	24	Pass
NVNT	ax20	5180	Ant0	11.61	0.12	11.73	24	Pass
NVNT	ax20	5200	Ant0	11.65	0.12	11.77	24	Pass
NVNT	ax20	5240	Ant0	11.09	0.12	11.21	24	Pass
NVNT	ax40	5190	Ant0	10.47	0.23	10.7	24	Pass
NVNT	ax40	5230	Ant0	10.79	0.24	11.03	24	Pass
NVNT	ax80	5210	Ant0	9.71	0.25	9.96	24	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	11.34	0.24	11.58	24	Pass
NVNT	a	5200	Ant1	11.23	0.24	11.47	24	Pass
NVNT	a	5240	Ant1	11.56	0.24	11.8	24	Pass
NVNT	n20	5180	Ant1	10.63	0.12	10.75	24	Pass
NVNT	n20	5200	Ant1	10.55	0.12	10.67	24	Pass
NVNT	n20	5240	Ant1	9.98	0.12	10.1	24	Pass
NVNT	n40	5190	Ant1	9.05	0.12	9.17	24	Pass
NVNT	n40	5230	Ant1	9.58	0.12	9.7	24	Pass
NVNT	ac20	5180	Ant1	10.63	0.12	10.75	24	Pass
NVNT	ac20	5200	Ant1	10.55	0.12	10.67	24	Pass
NVNT	ac20	5240	Ant1	9.96	0.12	10.08	24	Pass
NVNT	ac40	5190	Ant1	10.36	0.12	10.48	24	Pass
NVNT	ac40	5230	Ant1	9.16	0.12	9.28	24	Pass
NVNT	ac80	5210	Ant1	8.53	0.25	8.78	24	Pass
NVNT	ax20	5180	Ant1	10.76	0.12	10.88	24	Pass
NVNT	ax20	5200	Ant1	10.51	0.12	10.63	24	Pass
NVNT	ax20	5240	Ant1	9.95	0.12	10.07	24	Pass
NVNT	ax40	5190	Ant1	9.32	0.12	9.44	24	Pass
NVNT	ax40	5230	Ant1	9.01	0.12	9.13	24	Pass
NVNT	ax80	5210	Ant1	8.52	0.25	8.77	24	Pass

D.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant0	1.44	0.24	1.68	11	Pass
NVNT	a	5200	Ant0	1.43	0.24	1.67	11	Pass
NVNT	a	5240	Ant0	1.83	0.24	2.07	11	Pass
NVNT	n20	5180	Ant0	0.92	0.12	1.04	11	Pass
NVNT	n20	5200	Ant0	0.84	0.12	0.96	11	Pass
NVNT	n20	5240	Ant0	0.15	0.12	0.27	11	Pass
NVNT	n40	5190	Ant0	-3.55	0.24	-3.31	11	Pass
NVNT	n40	5230	Ant0	-3.48	0.23	-3.25	11	Pass
NVNT	ac20	5180	Ant0	0.79	0.12	0.91	11	Pass
NVNT	ac20	5200	Ant0	0.98	0.12	1.1	11	Pass
NVNT	ac20	5240	Ant0	0.19	0.12	0.31	11	Pass
NVNT	ac40	5190	Ant0	-3.65	0.24	-3.41	11	Pass
NVNT	ac40	5230	Ant0	-2.77	0.24	-2.53	11	Pass
NVNT	ac80	5210	Ant0	-6.8	0.25	-6.55	11	Pass
NVNT	ax20	5180	Ant0	0.79	0.12	0.91	11	Pass
NVNT	ax20	5200	Ant0	0.86	0.12	0.98	11	Pass
NVNT	ax20	5240	Ant0	0.47	0.12	0.59	11	Pass
NVNT	ax40	5190	Ant0	-3.62	0.23	-3.39	11	Pass
NVNT	ax40	5230	Ant0	-2.7	0.24	-2.46	11	Pass
NVNT	ax80	5210	Ant0	-6.85	0.25	-6.6	11	Pass

Test Graphs

PSD NVNT a 5180MHz Ant0

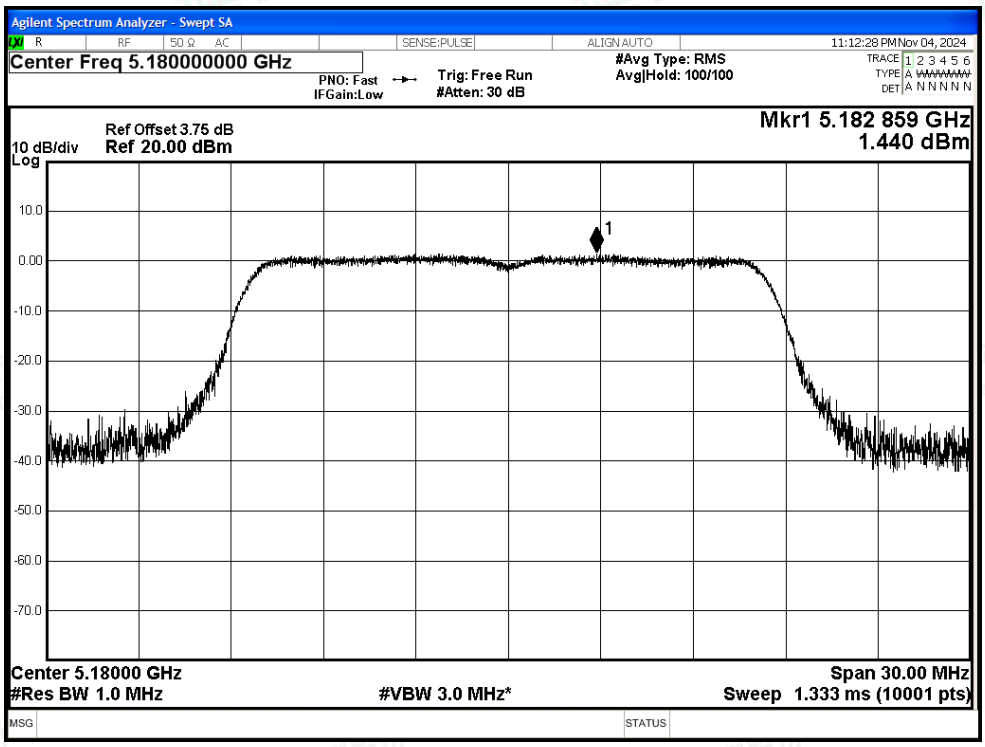

PSD NVNT a 5200MHz Ant0

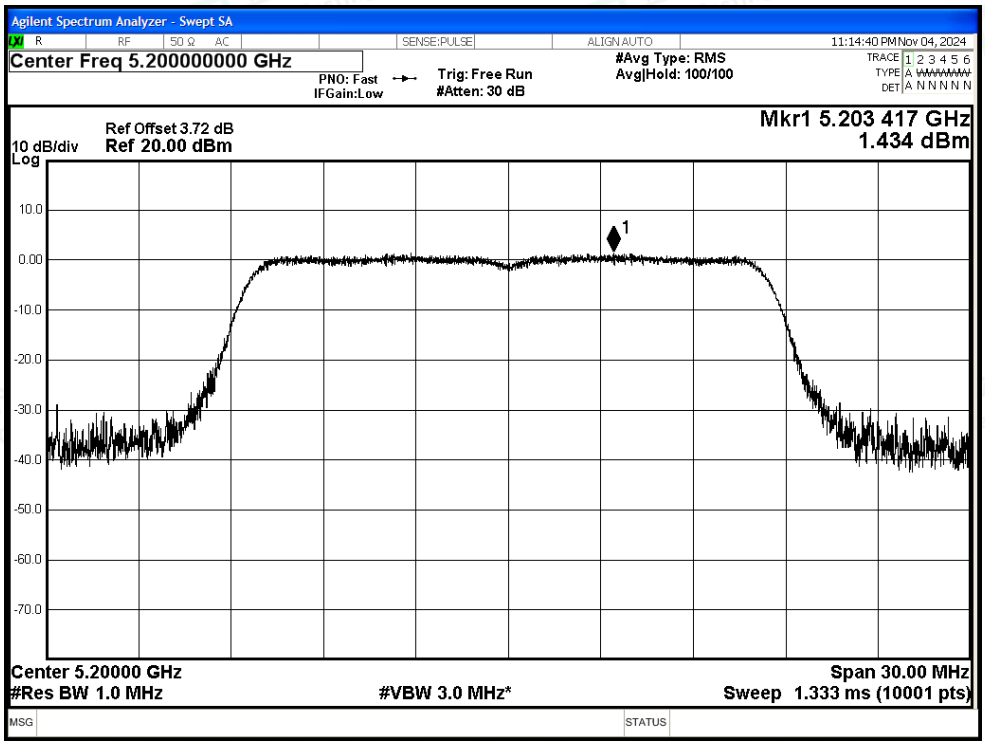

PSD NVNT a 5240MHz Ant0

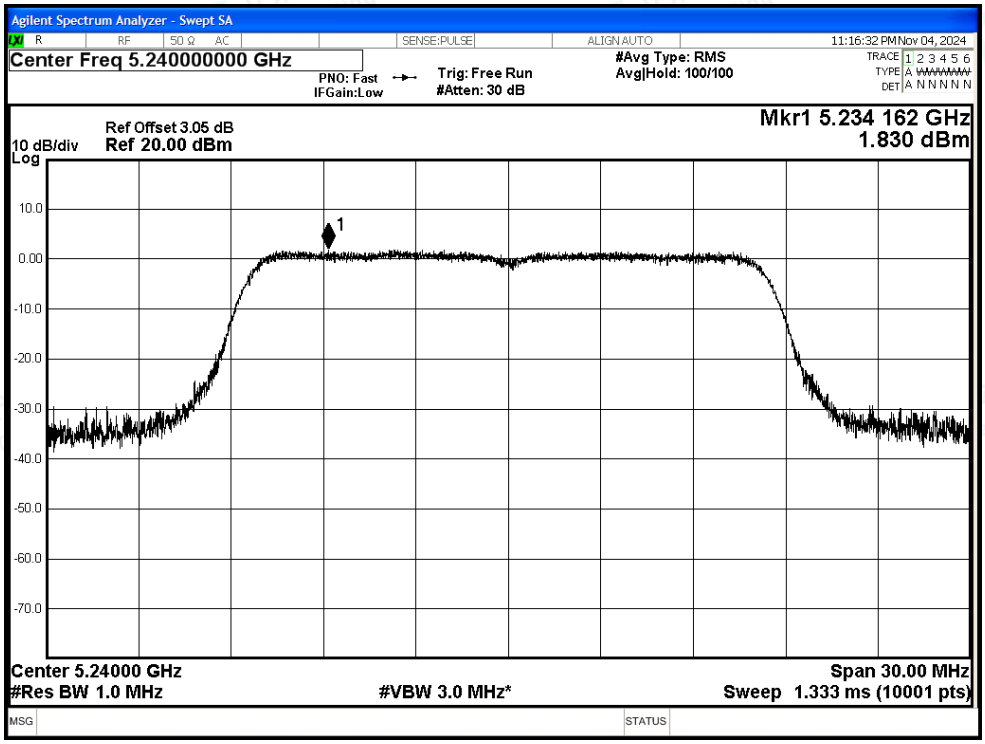

PSD NVNT n20 5180MHz Ant0

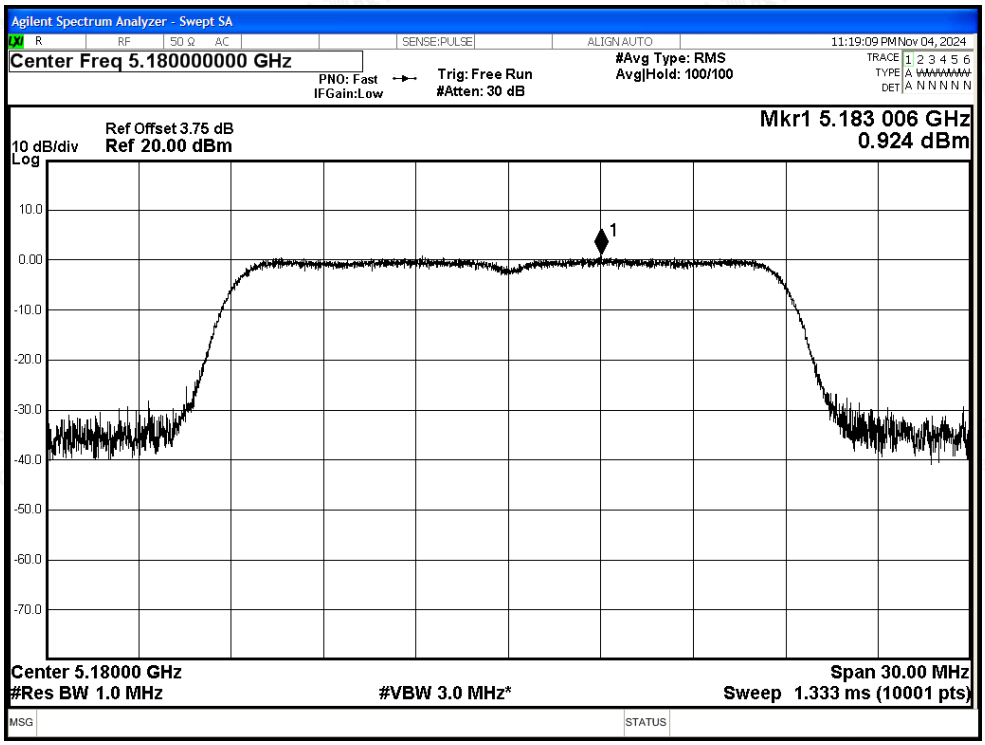

PSD NVNT n20 5200MHz Ant0

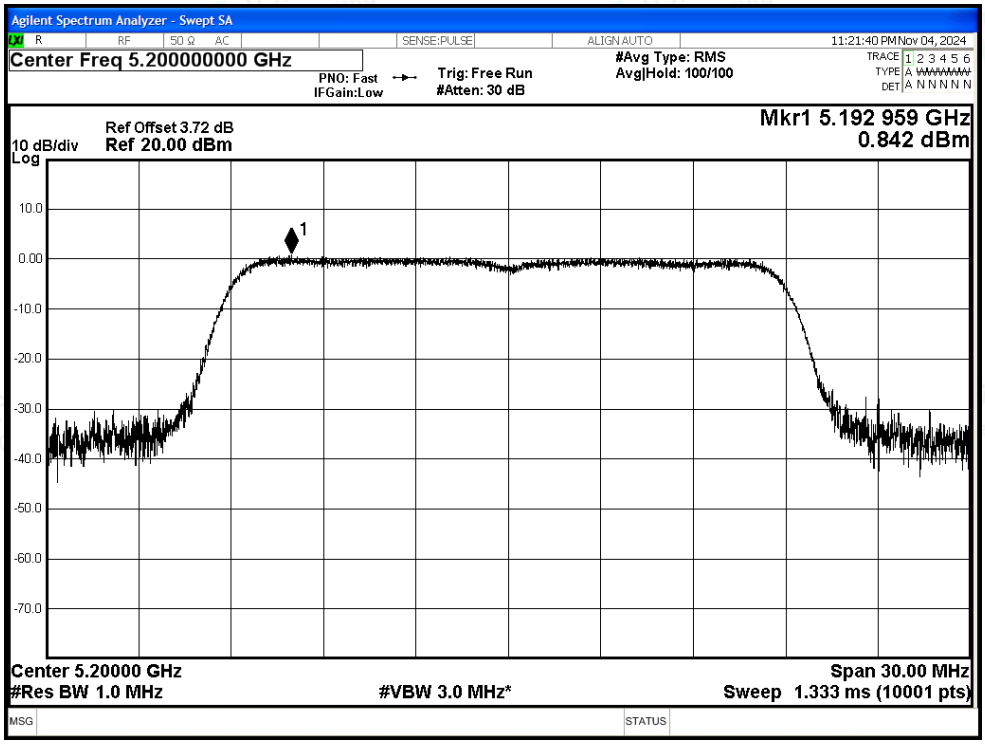

PSD NVNT n20 5240MHz Ant0

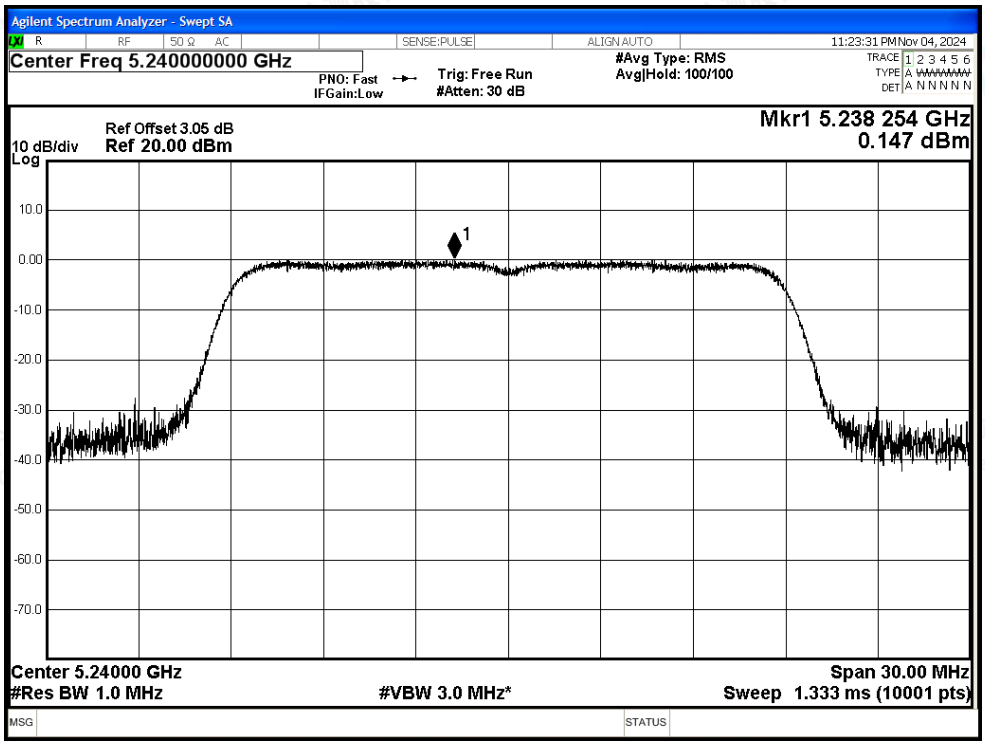

PSD NVNT n40 5190MHz Ant0

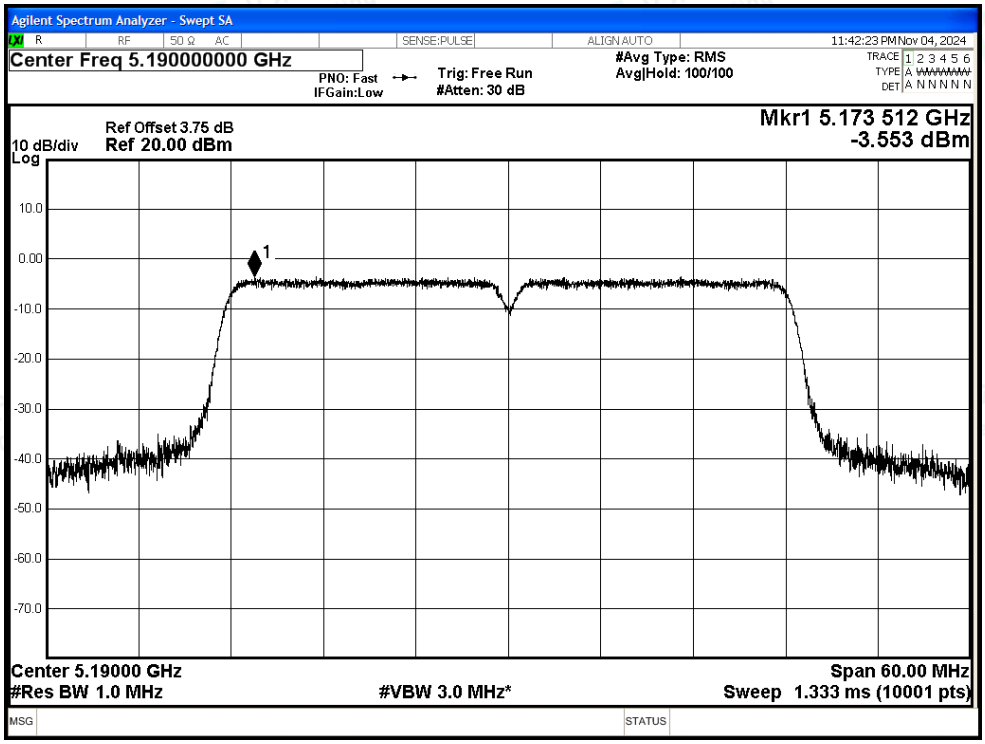

PSD NVNT n40 5230MHz Ant0

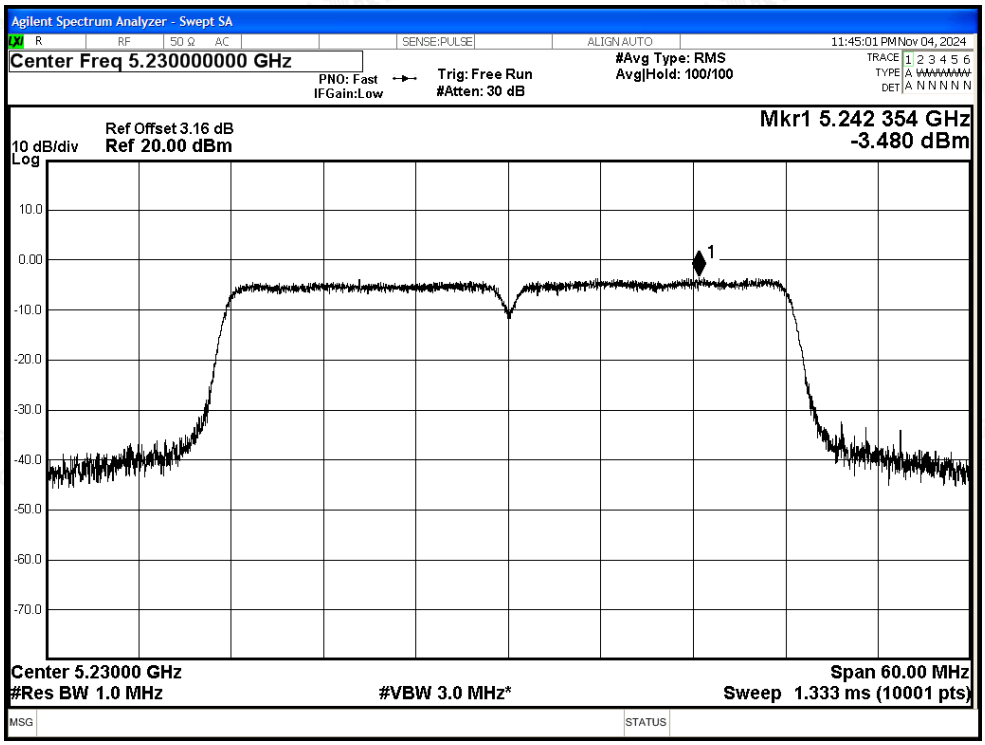

PSD NVNT ac20 5180MHz Ant0

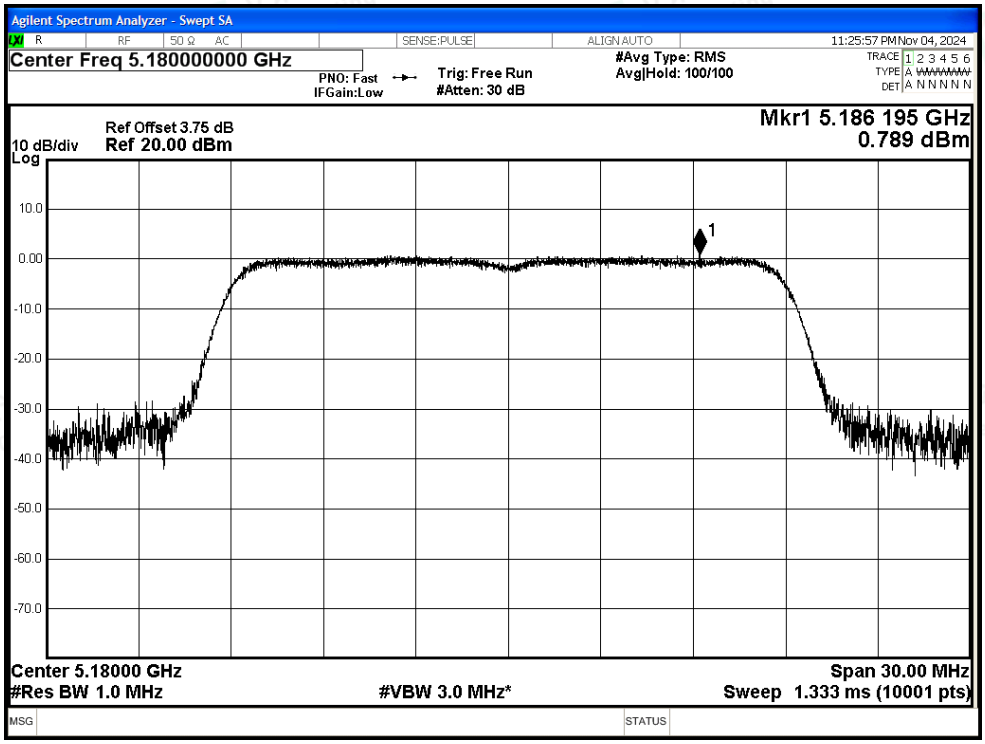

PSD NVNT ac20 5200MHz Ant0

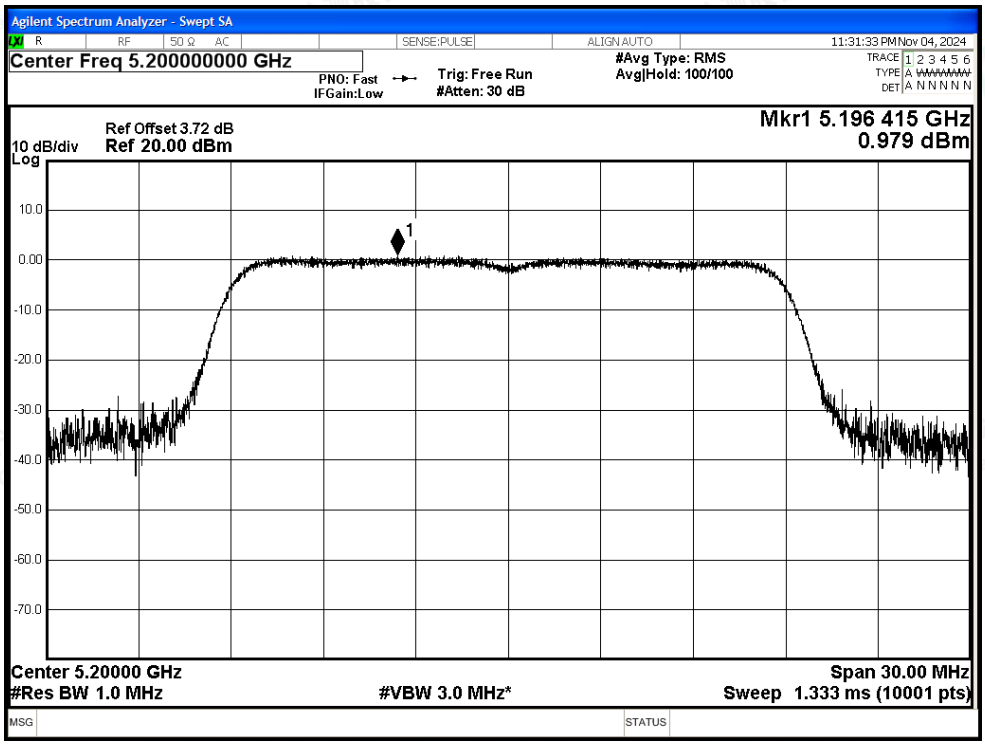

PSD NVNT ac20 5240MHz Ant0

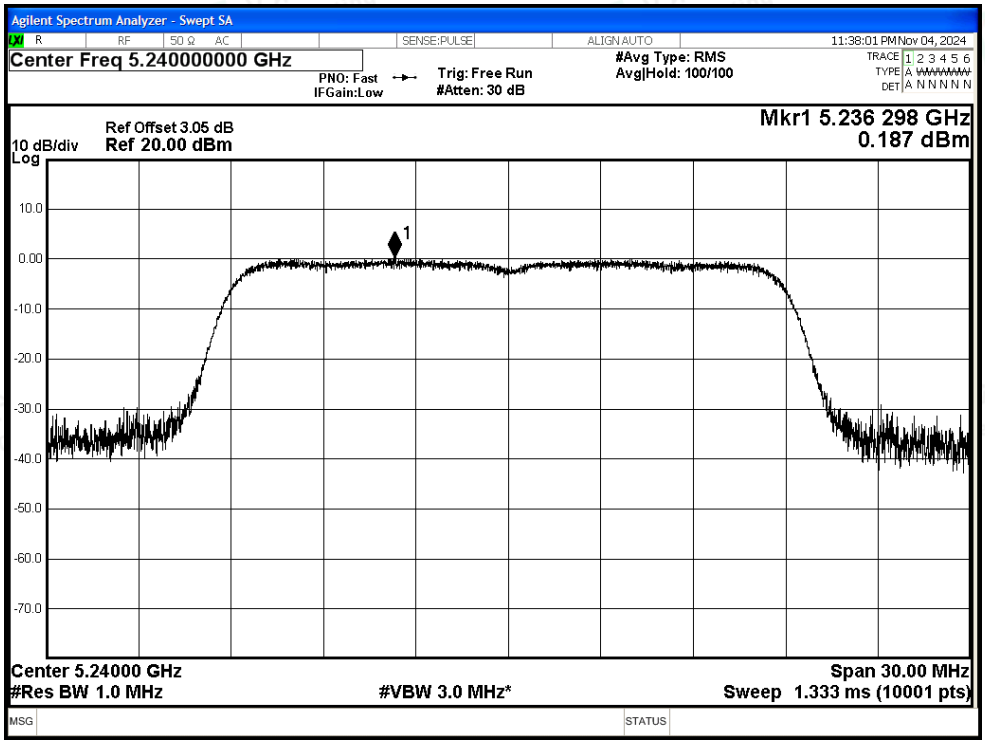

PSD NVNT ac40 5190MHz Ant0

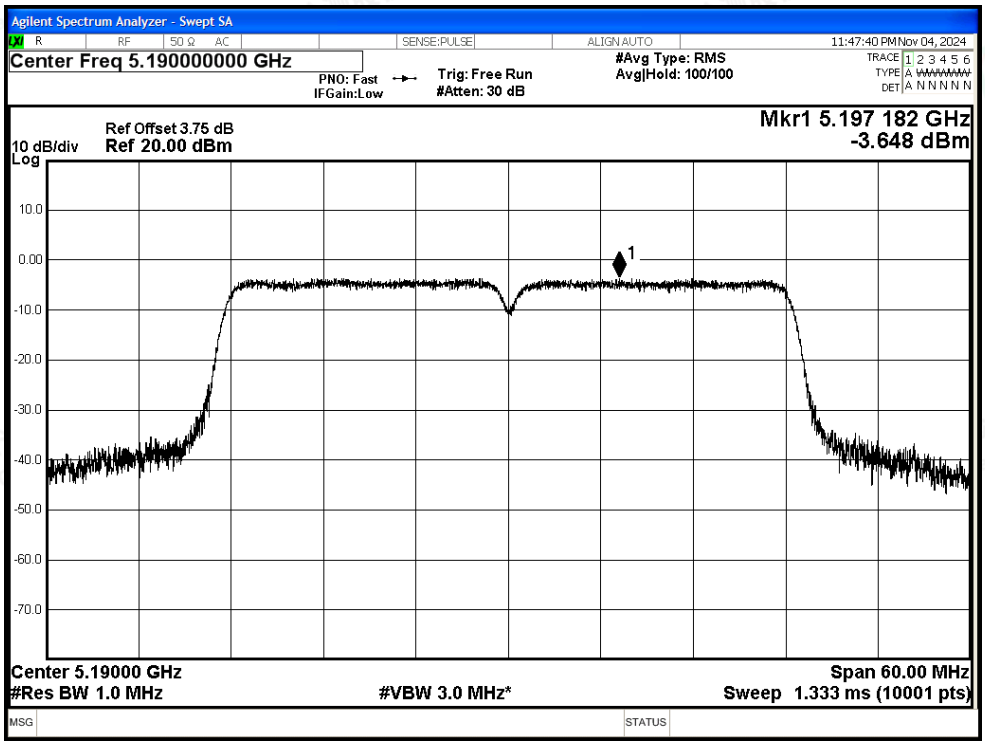

PSD NVNT ac40 5230MHz Ant0

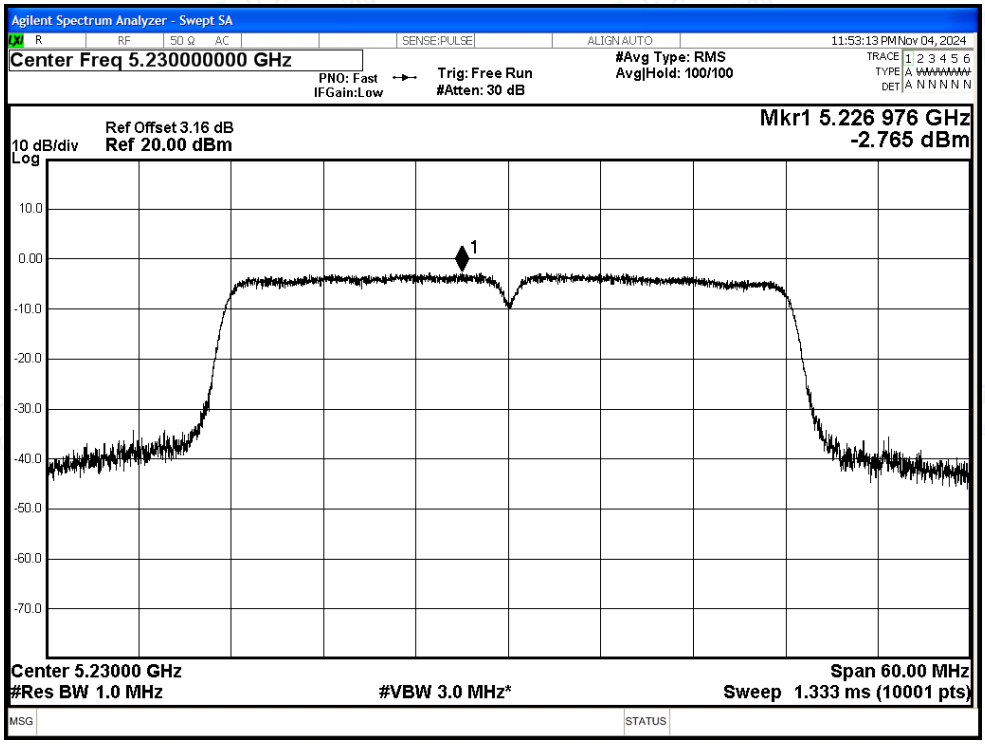

PSD NVNT ac80 5210MHz Ant0

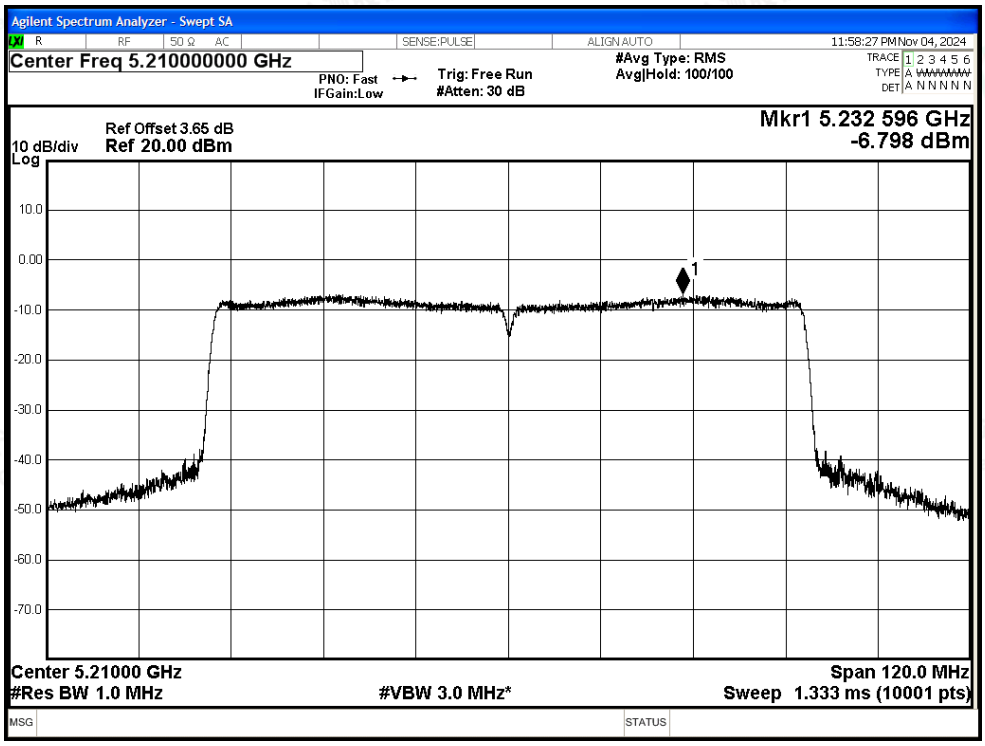

PSD NVNT ax20 5180MHz Ant0

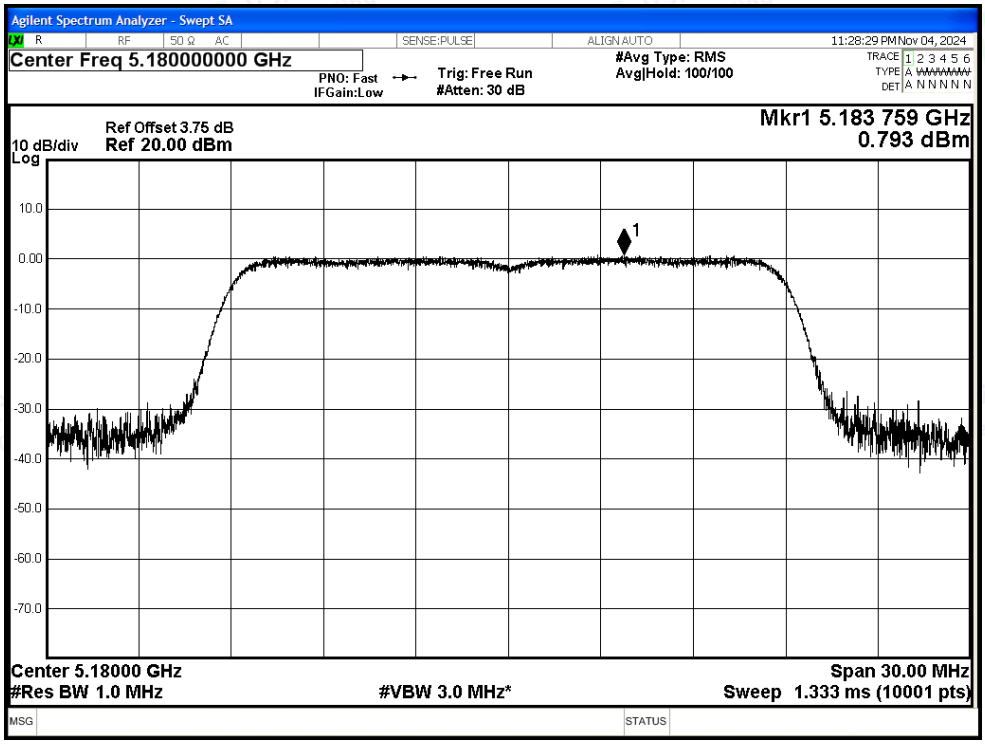

PSD NVNT ax20 5200MHz Ant0

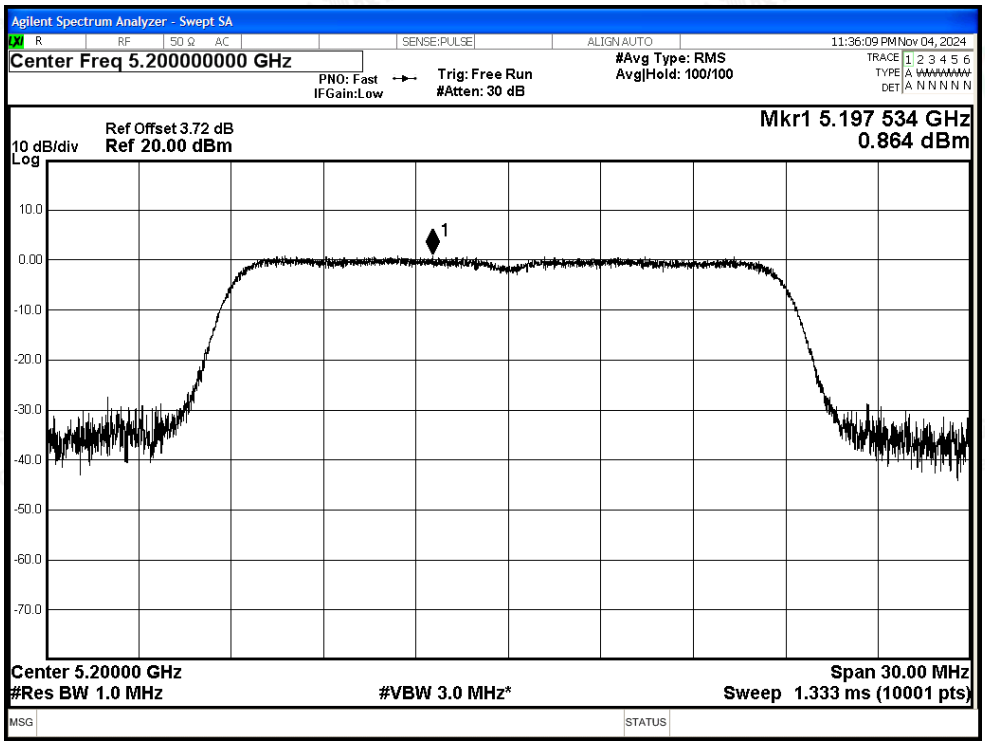

PSD NVNT ax20 5240MHz Ant0

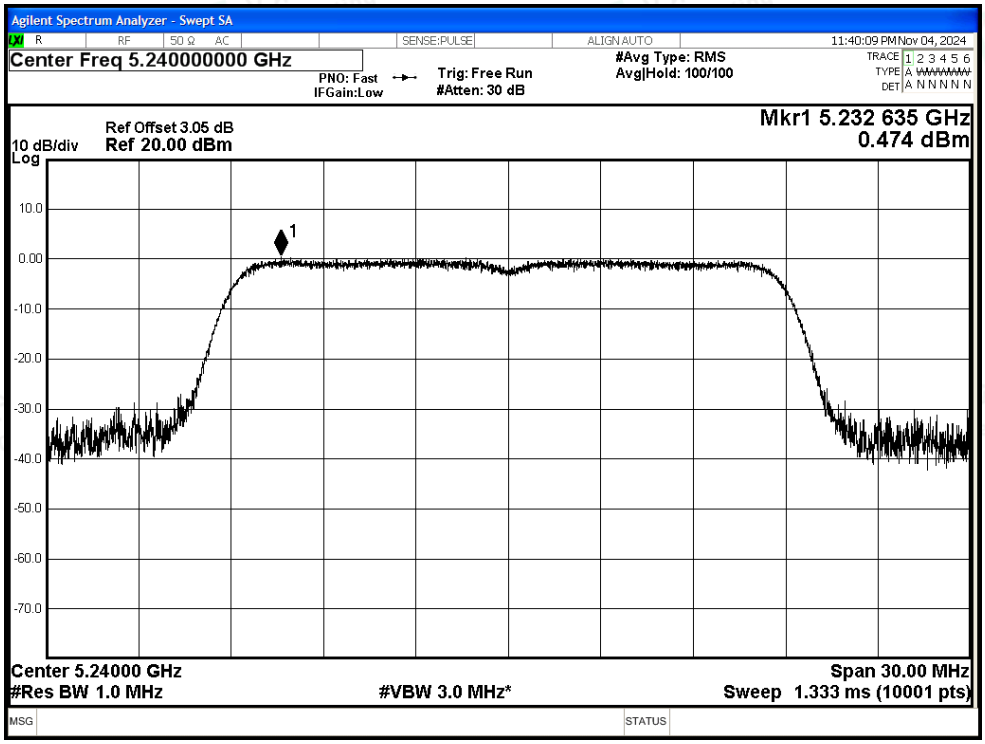

PSD NVNT ax40 5190MHz Ant0

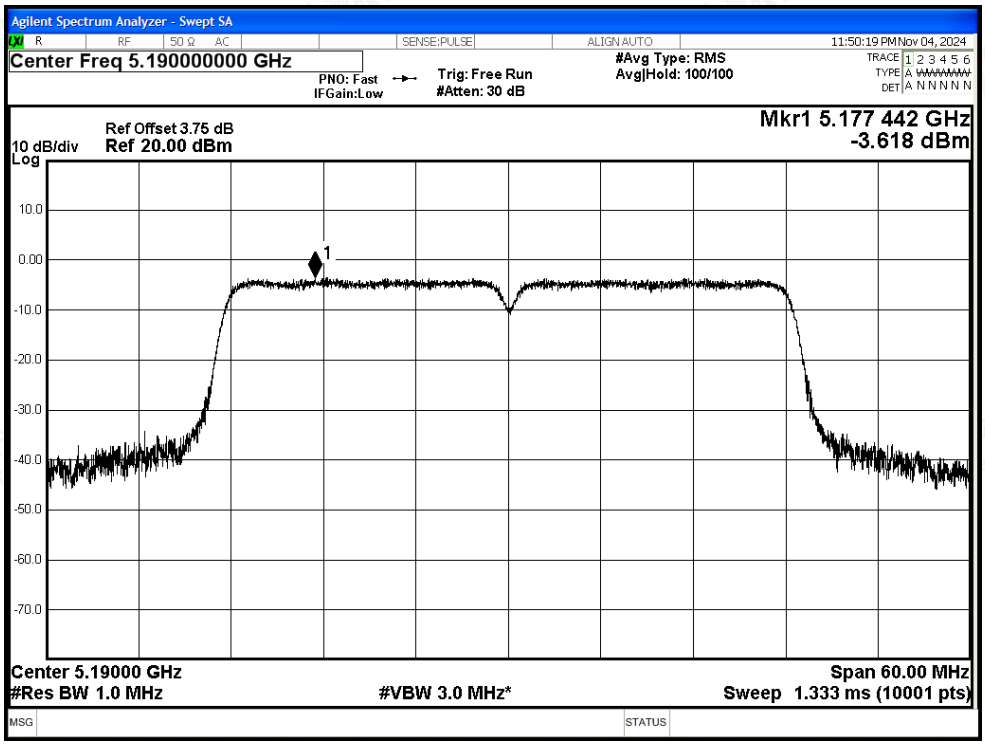

PSD NVNT ax40 5230MHz Ant0

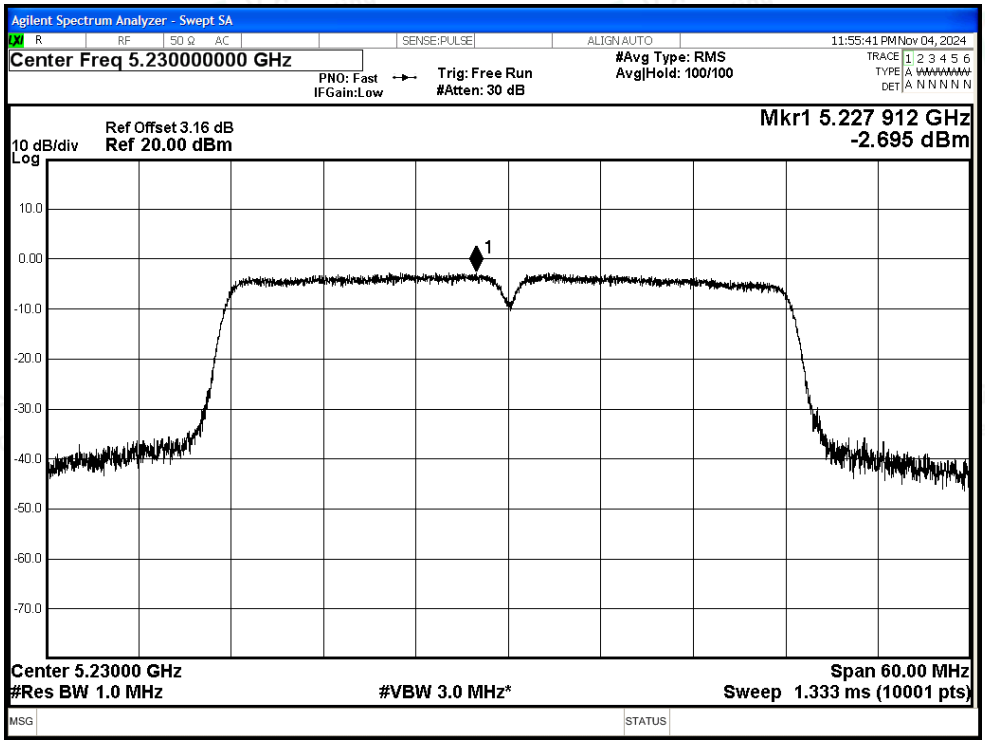

PSD NVNT ax80 5210MHz Ant0

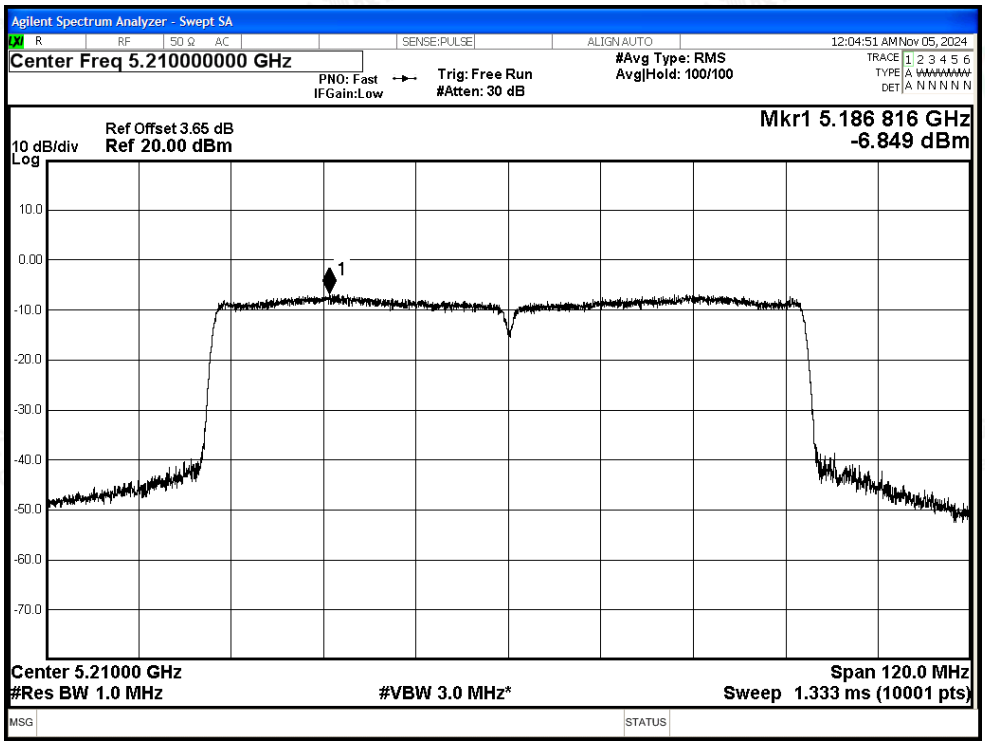

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant1	0.68	0.24	0.92	11	Pass
NVNT	a	5200	Ant1	0.8	0.24	1.04	11	Pass
NVNT	a	5240	Ant1	1.03	0.24	1.27	11	Pass
NVNT	n20	5180	Ant1	-0.15	0.12	-0.03	11	Pass
NVNT	n20	5200	Ant1	-0.26	0.12	-0.14	11	Pass
NVNT	n20	5240	Ant1	-0.76	0.12	-0.64	11	Pass
NVNT	n40	5190	Ant1	-4.86	0.12	-4.74	11	Pass
NVNT	n40	5230	Ant1	-3.8	0.12	-3.68	11	Pass
NVNT	ac20	5180	Ant1	-0.2	0.12	-0.08	11	Pass
NVNT	ac20	5200	Ant1	-0.17	0.12	-0.05	11	Pass
NVNT	ac20	5240	Ant1	-0.79	0.12	-0.67	11	Pass
NVNT	ac40	5190	Ant1	-3.64	0.12	-3.52	11	Pass
NVNT	ac40	5230	Ant1	-4.57	0.12	-4.45	11	Pass
NVNT	ac80	5210	Ant1	-7.62	0.25	-7.37	11	Pass
NVNT	ax20	5180	Ant1	-0.06	0.12	0.06	11	Pass
NVNT	ax20	5200	Ant1	-0.27	0.12	-0.15	11	Pass
NVNT	ax20	5240	Ant1	-0.66	0.12	-0.54	11	Pass
NVNT	ax40	5190	Ant1	-4.6	0.12	-4.48	11	Pass
NVNT	ax40	5230	Ant1	-4.66	0.12	-4.54	11	Pass
NVNT	ax80	5210	Ant1	-7.66	0.25	-7.41	11	Pass

Test Graphs

PSD NVNT a 5180MHz Ant1

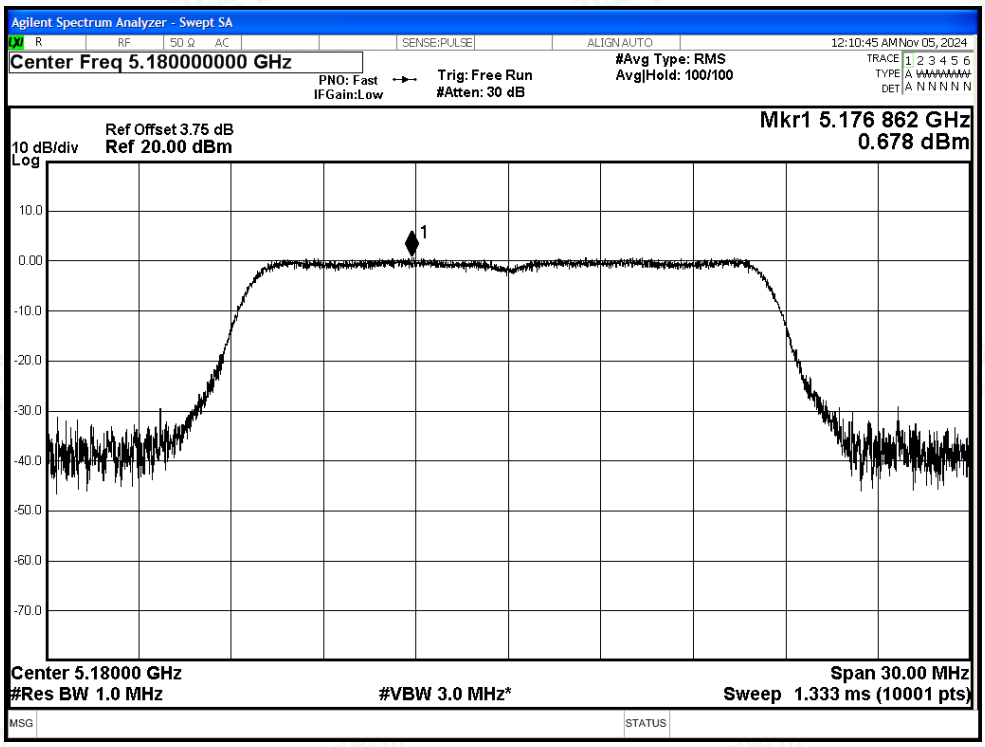

PSD NVNT a 5200MHz Ant1

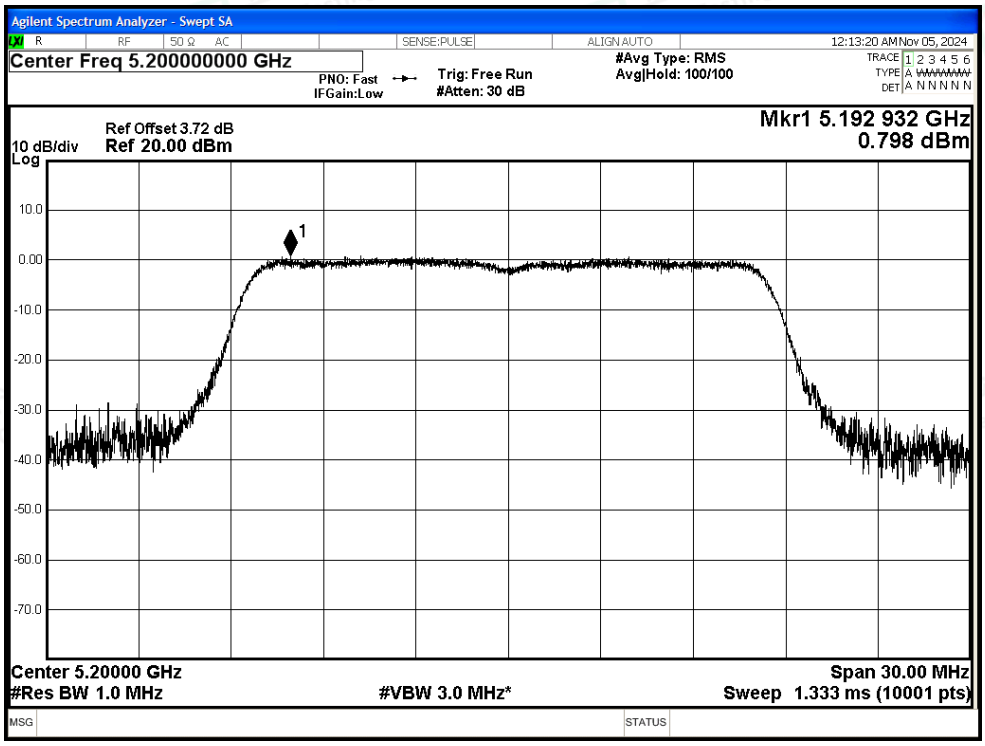

PSD NVNT a 5240MHz Ant1

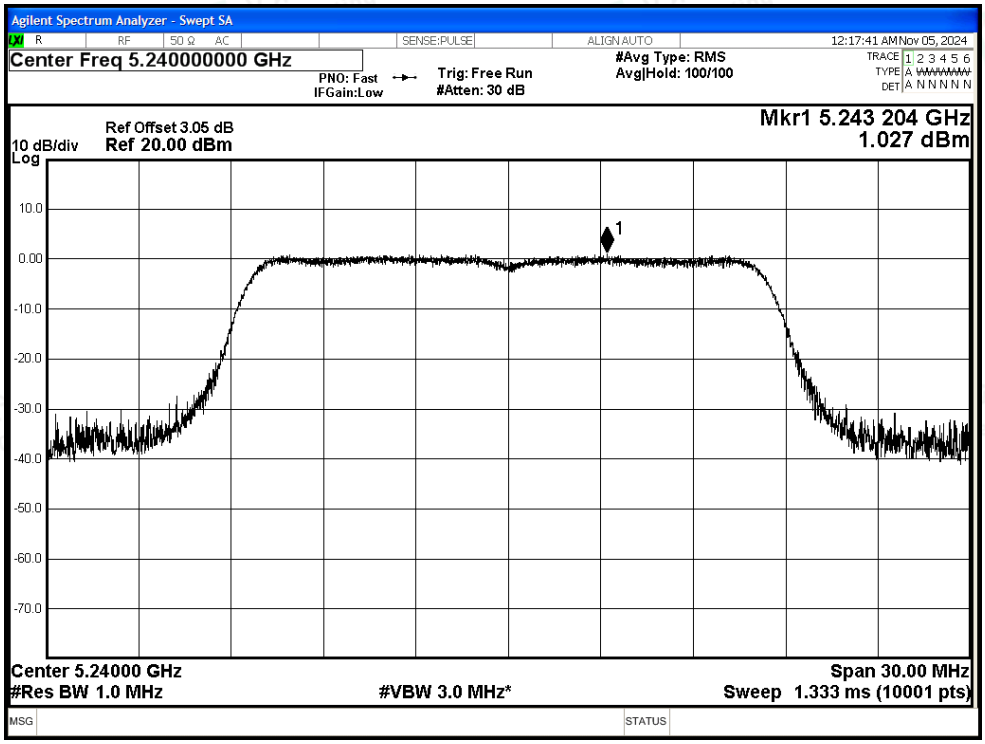

PSD NVNT n20 5180MHz Ant1

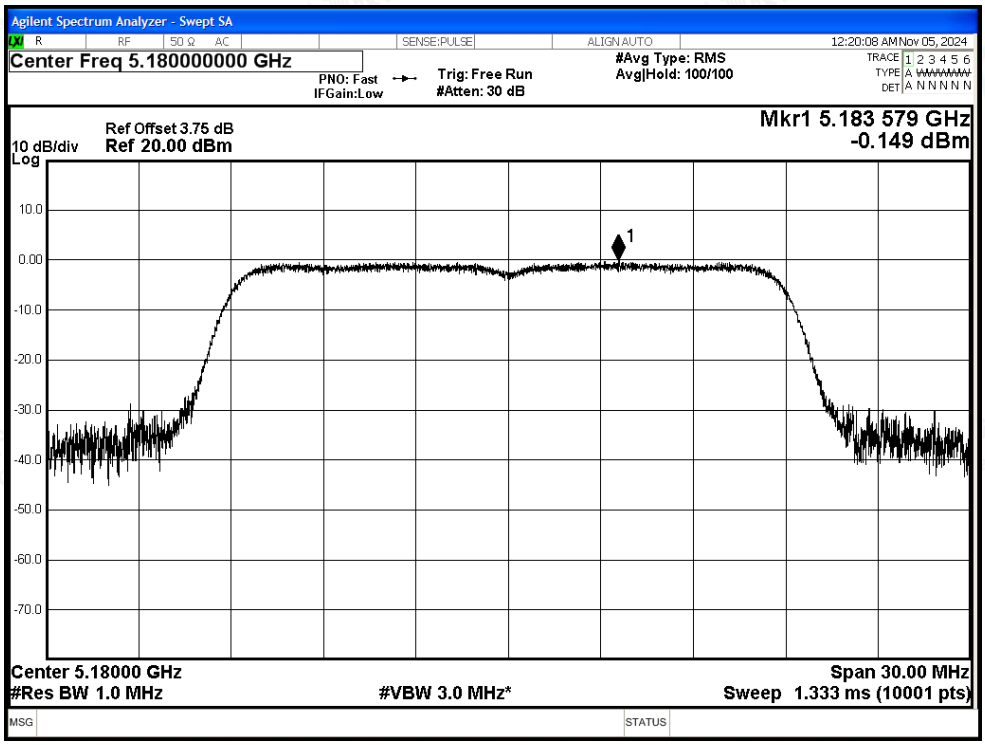

PSD NVNT n20 5200MHz Ant1

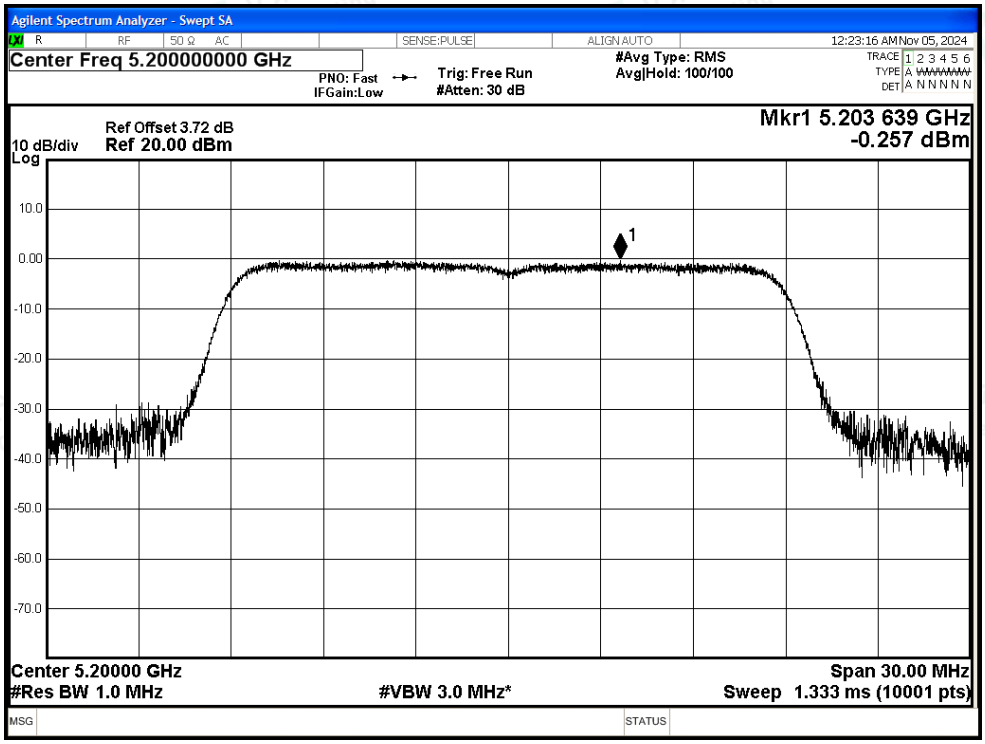

PSD NVNT n20 5240MHz Ant1

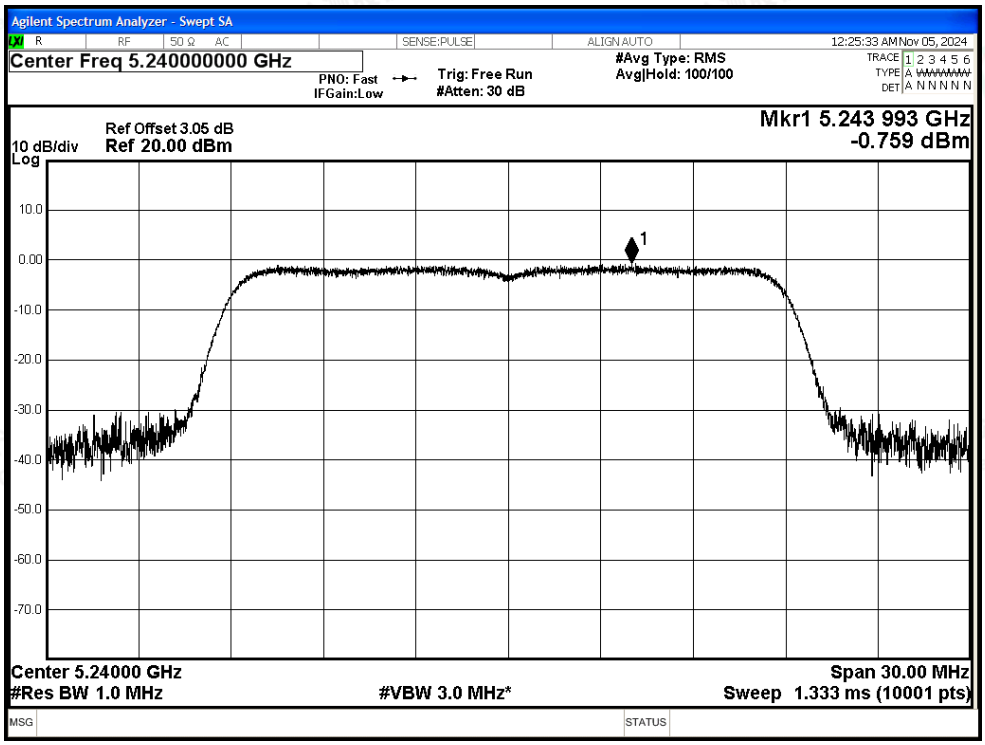

PSD NVNT n40 5190MHz Ant1

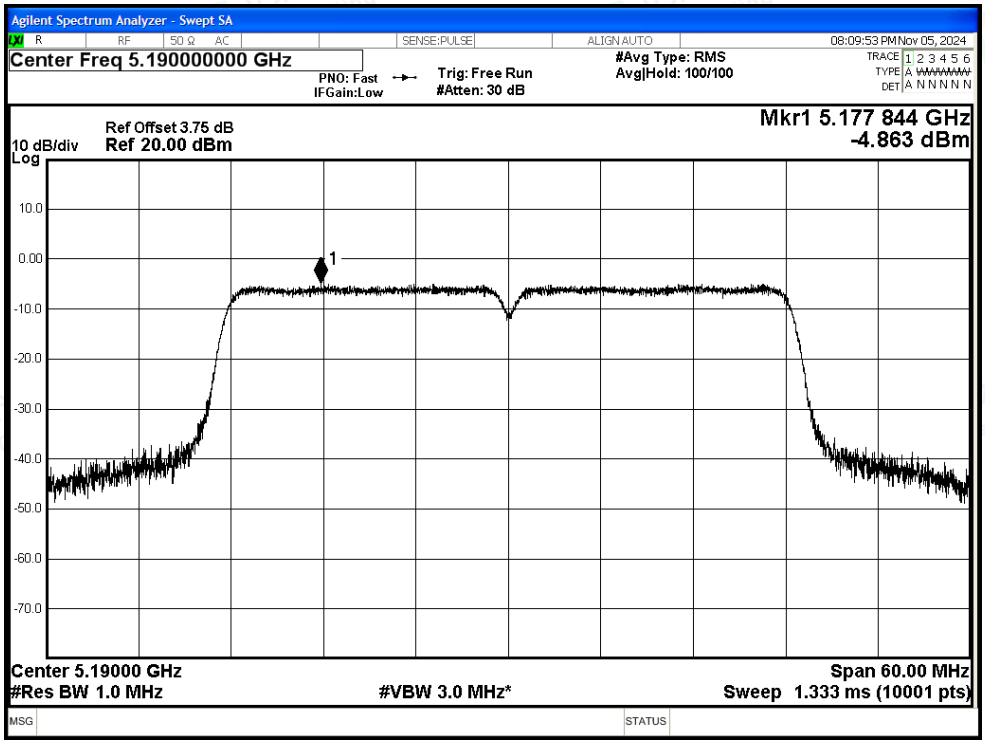

PSD NVNT n40 5230MHz Ant1

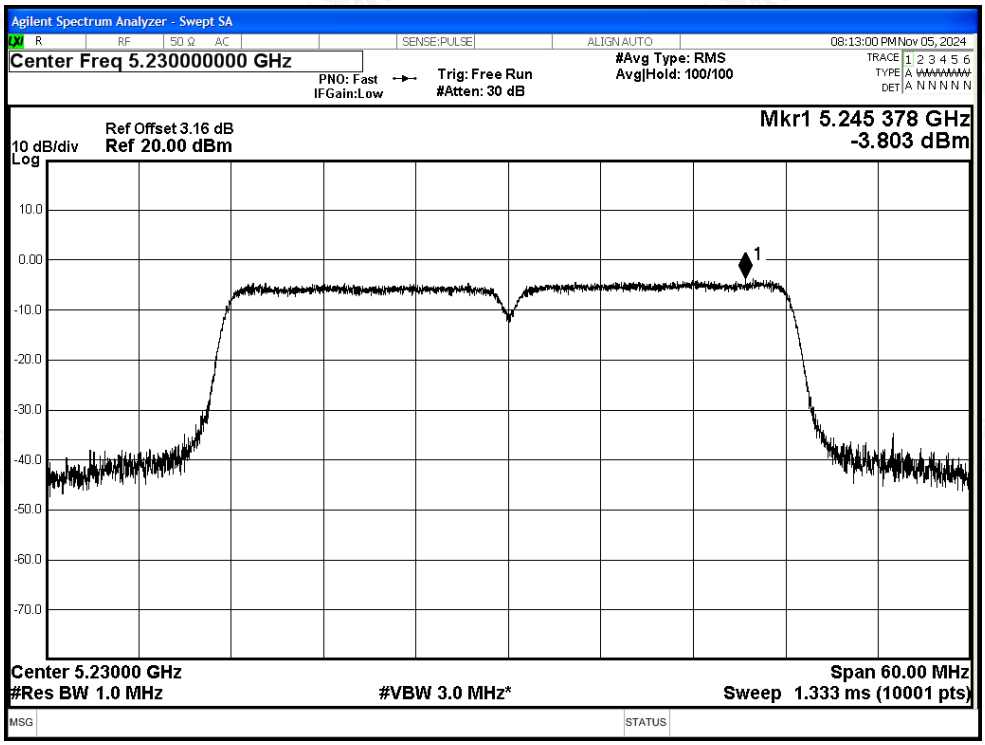

PSD NVNT ac20 5180MHz Ant1

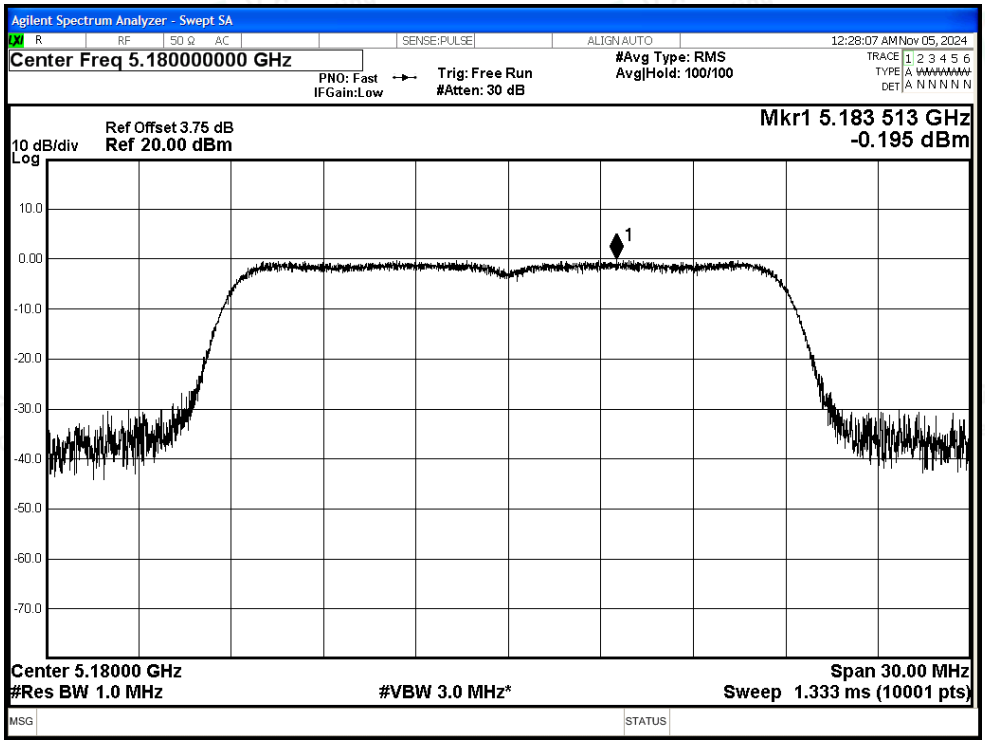

PSD NVNT ac20 5200MHz Ant1

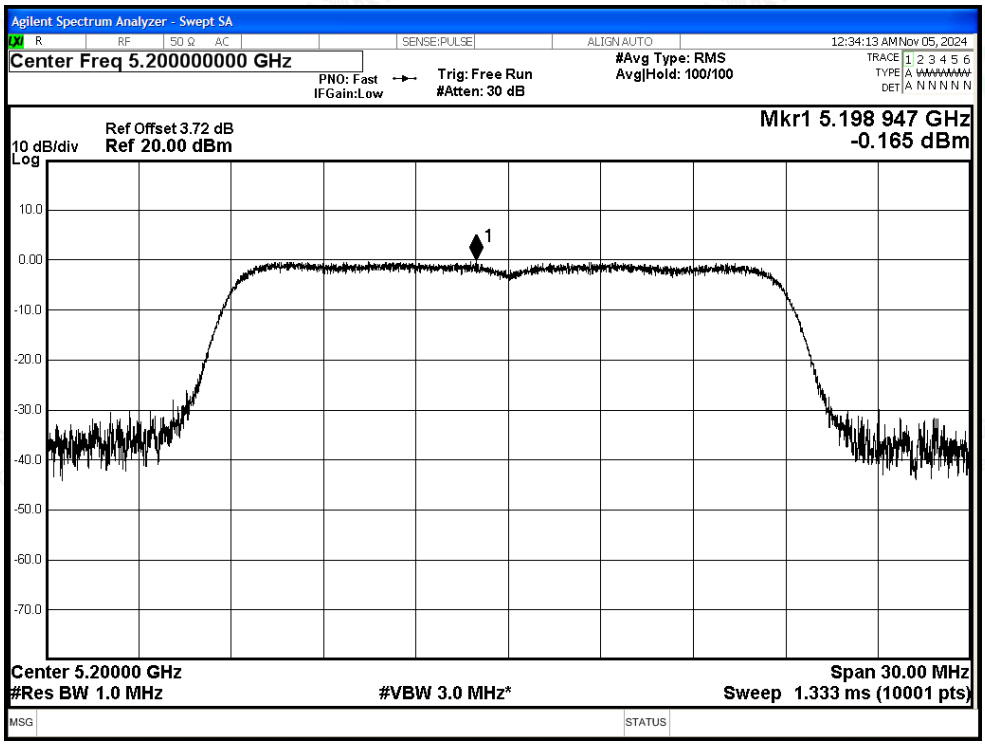

PSD NVNT ac20 5240MHz Ant1

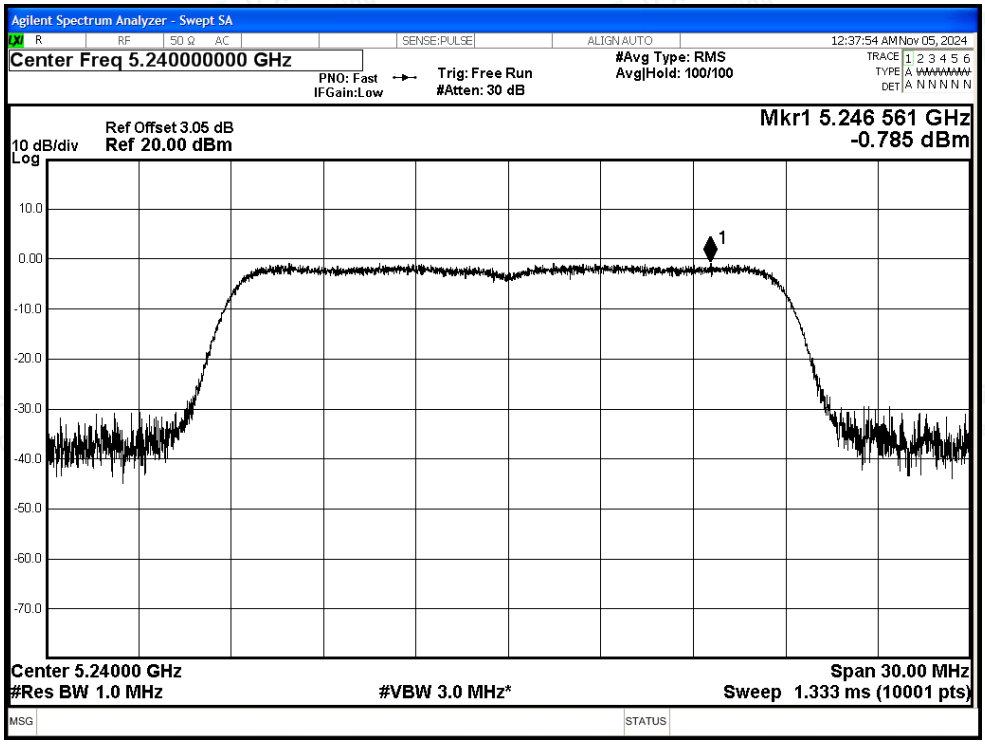

PSD NVNT ac40 5190MHz Ant1

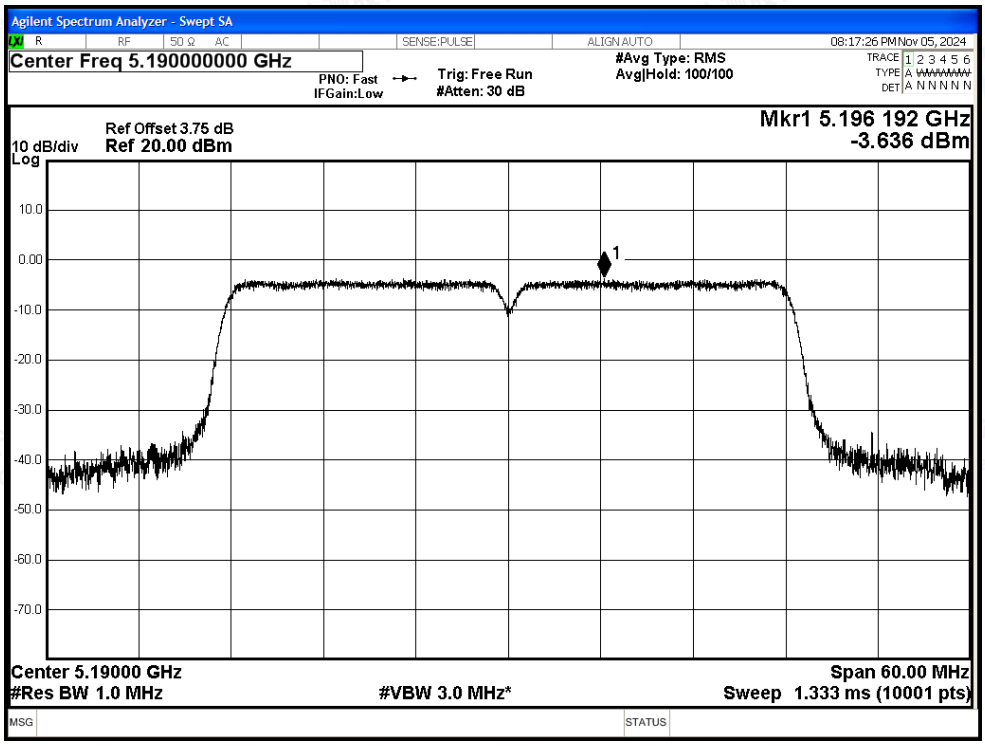

PSD NVNT ac40 5230MHz Ant1

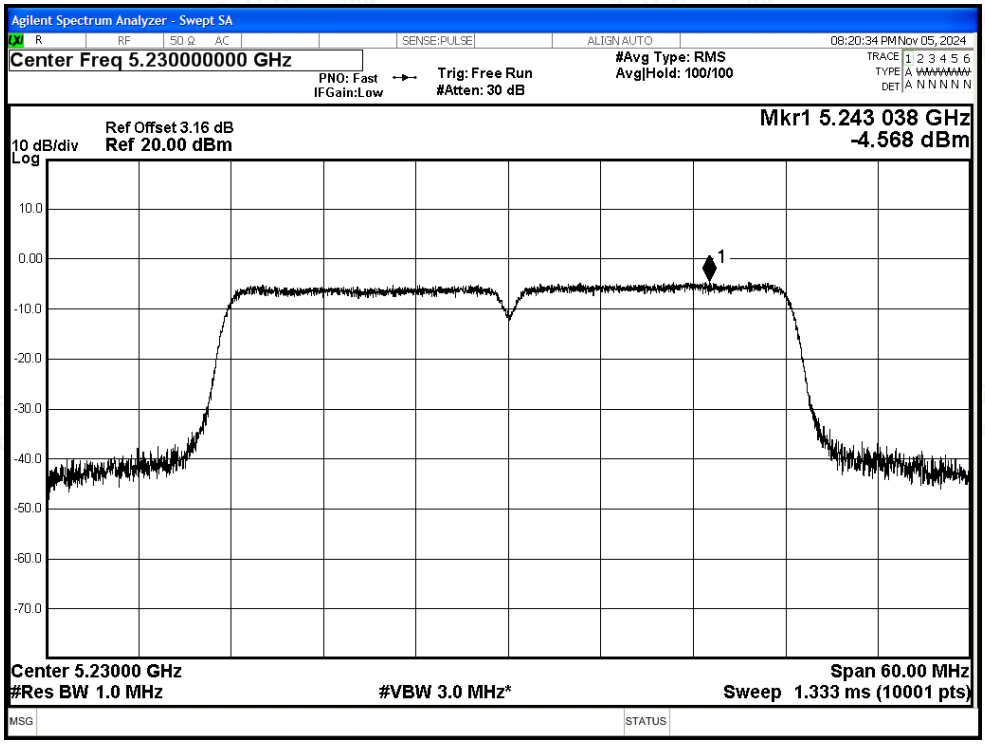

PSD NVNT ac80 5210MHz Ant1

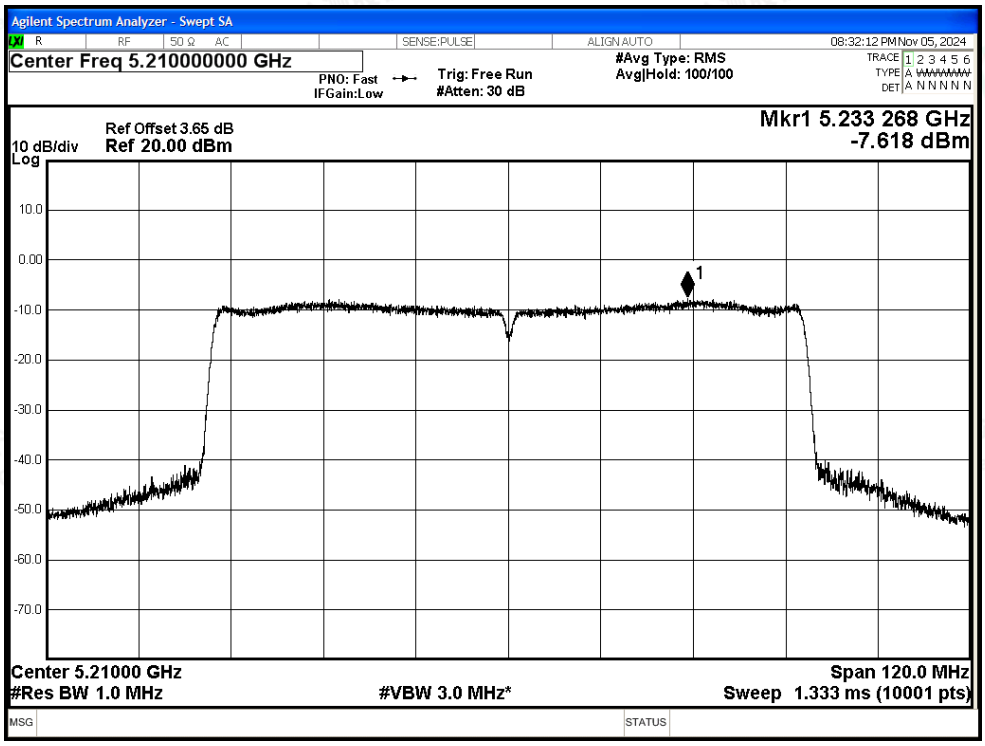

PSD NVNT ax20 5180MHz Ant1

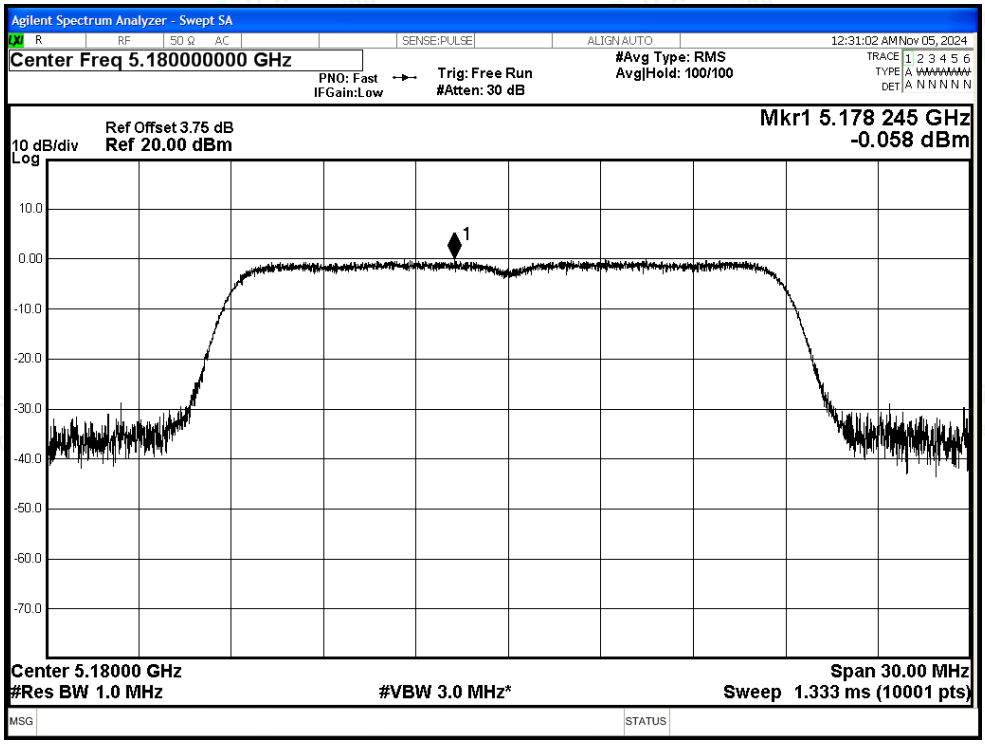

PSD NVNT ax20 5200MHz Ant1

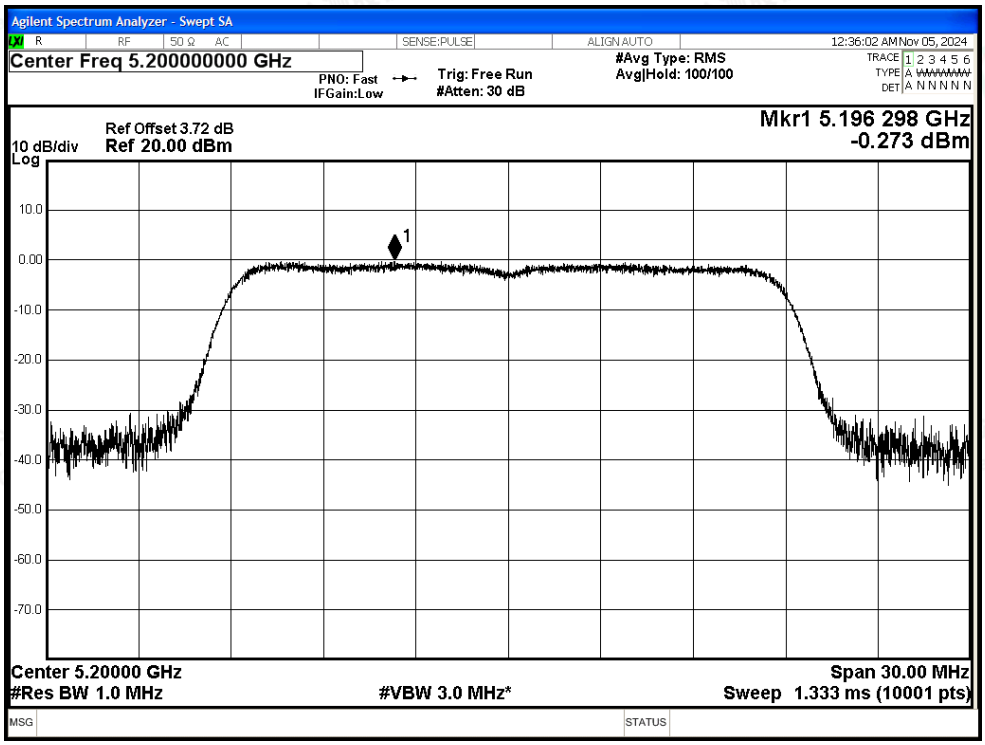

PSD NVNT ax20 5240MHz Ant1

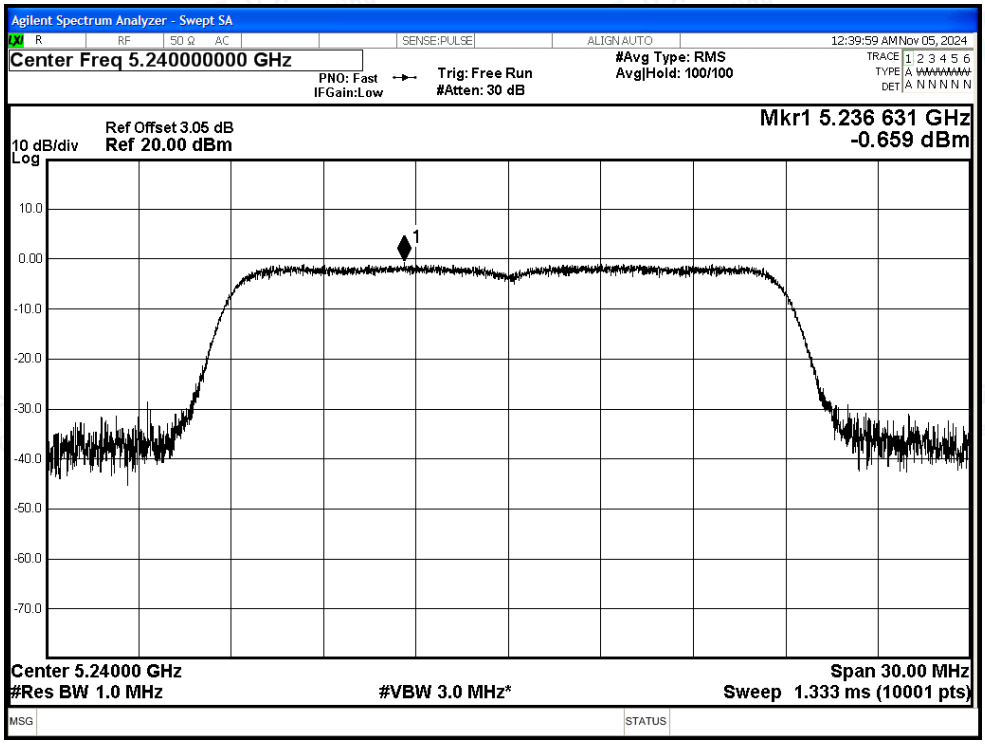

PSD NVNT ax40 5190MHz Ant1

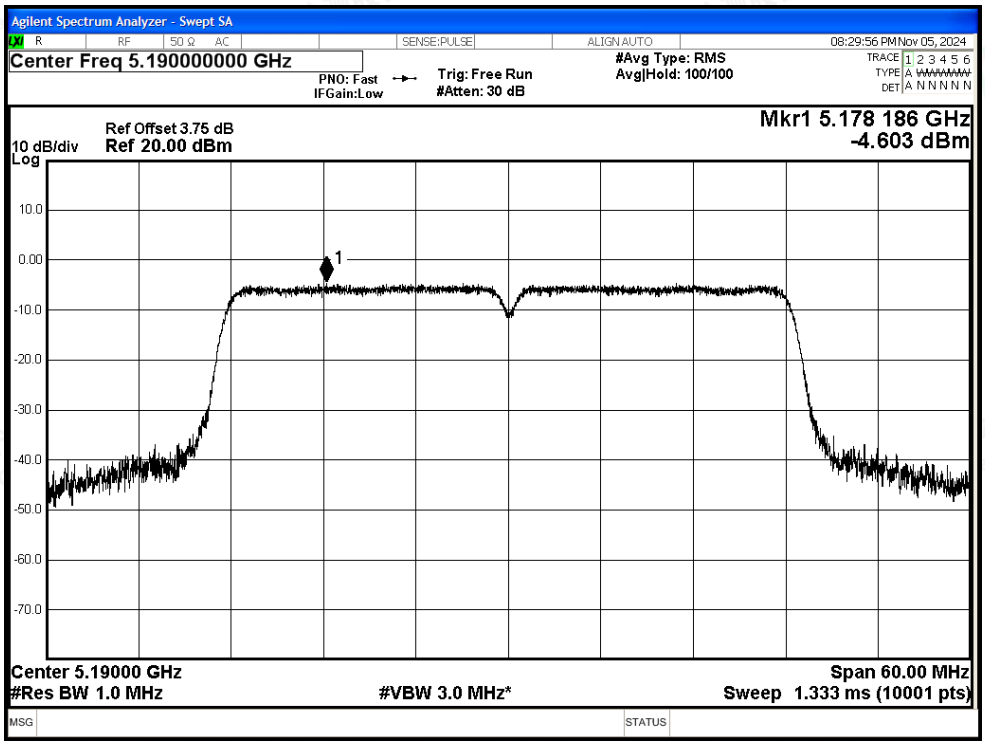

PSD NVNT ax40 5230MHz Ant1

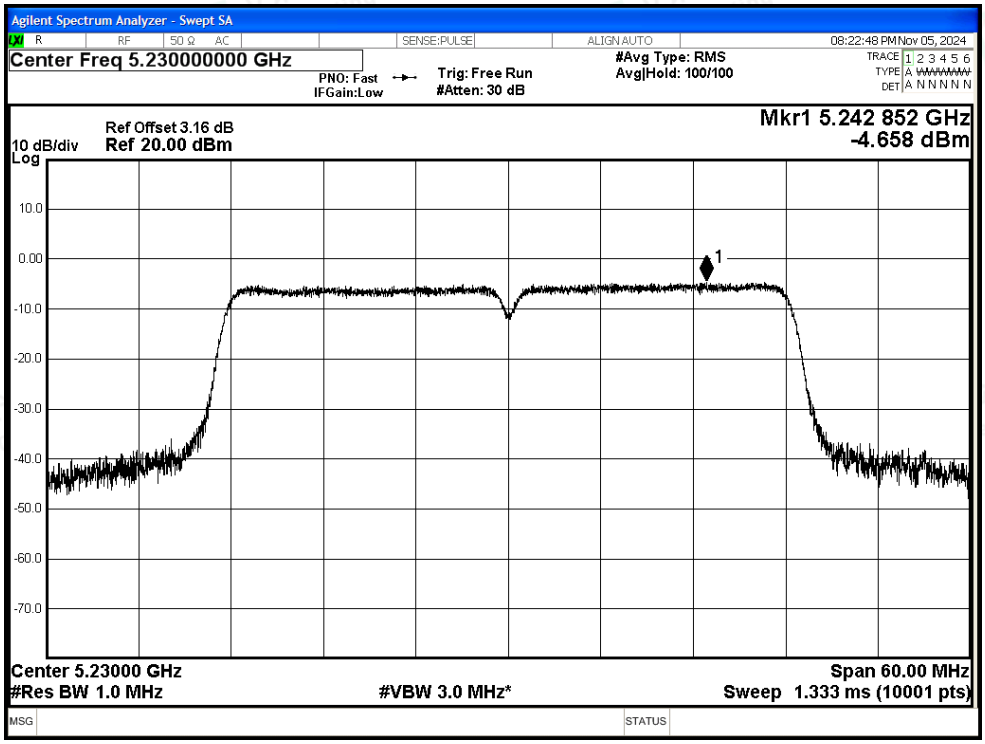

PSD NVNT ax80 5210MHz Ant1

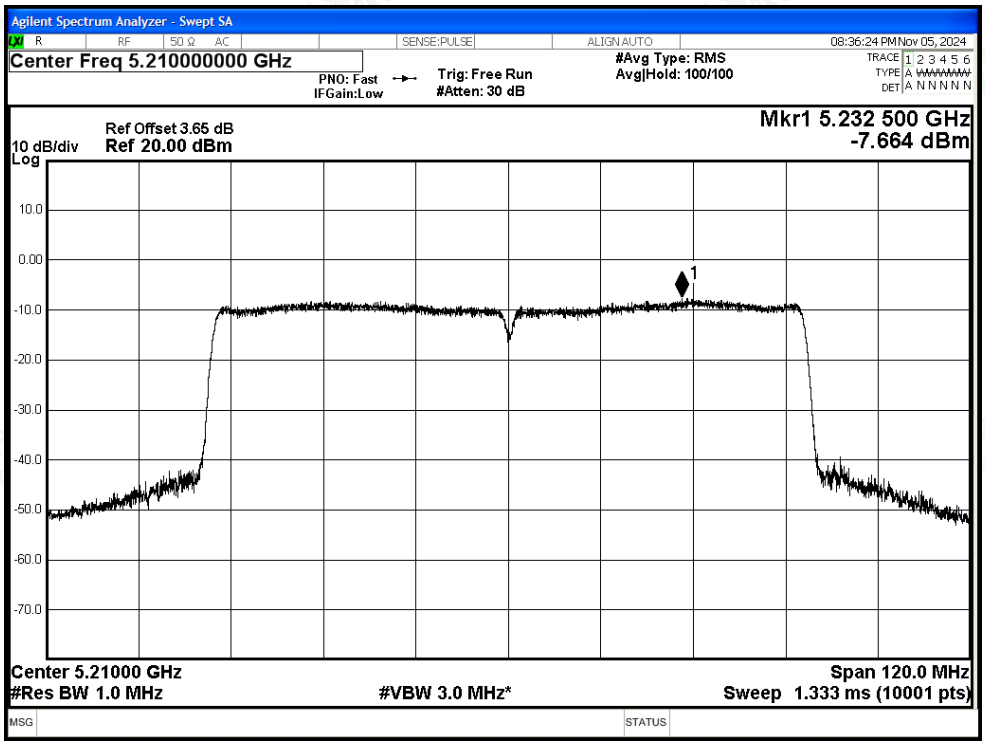

D.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant0	4500	-50.57	3.45	-	48.11	Peak	68.2	Pass
NVNT	a	5180	Ant0	4500	-58.29	3.45	0.24	40.63	Average	54	Pass
NVNT	a	5180	Ant0	5149.6	-37.69	3.45	-	60.99	Peak	68.2	Pass
NVNT	a	5180	Ant0	5148.2	-52	3.45	0.24	46.92	Average	54	Pass
NVNT	a	5180	Ant0	5150	-37.52	3.45	-	61.16	Peak	68.2	Pass
NVNT	a	5180	Ant0	5150	-50.08	3.45	0.24	48.84	Average	54	Pass
NVNT	a	5240	Ant0	5350	-48.53	3.45	-	50.15	Peak	68.2	Pass
NVNT	a	5240	Ant0	5350	-56.55	3.45	0.24	42.37	Average	54	Pass
NVNT	a	5240	Ant0	5408.64	-47.11	3.45	-	51.57	Peak	68.2	Pass
NVNT	a	5240	Ant0	5350.08	-56.55	3.45	0.24	42.37	Average	54	Pass
NVNT	a	5240	Ant0	5460	-50.55	3.45	-	48.13	Peak	68.2	Pass
NVNT	a	5240	Ant0	5460	-58.03	3.45	0.24	40.89	Average	54	Pass
NVNT	n20	5180	Ant0	4500	-48.07	3.45	-	50.61	Peak	68.2	Pass
NVNT	n20	5180	Ant0	4500	-58.82	3.45	0.12	39.98	Average	54	Pass
NVNT	n20	5180	Ant0	5144.7	-42.1	3.45	-	56.58	Peak	68.2	Pass
NVNT	n20	5180	Ant0	5149.6	-53.24	3.45	0.12	45.56	Average	54	Pass
NVNT	n20	5180	Ant0	5150	-42.53	3.45	-	56.15	Peak	68.2	Pass
NVNT	n20	5180	Ant0	5150	-53.3	3.45	0.12	45.5	Average	54	Pass
NVNT	n20	5240	Ant0	5350	-49.25	3.45	-	49.43	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5350	-57.54	3.45	0.12	41.26	Average	54	Pass
NVNT	n20	5240	Ant0	5435.04	-47.03	3.45	-	51.65	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5352.24	-56.76	3.45	0.12	42.04	Average	54	Pass
NVNT	n20	5240	Ant0	5460	-50.3	3.45	-	48.38	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5460	-58.01	3.45	0.12	40.79	Average	54	Pass
NVNT	n40	5190	Ant0	4500	-50.65	3.45	-	48.03	Peak	68.2	Pass
NVNT	n40	5190	Ant0	4500	-58.18	3.45	0.24	40.74	Average	54	Pass
NVNT	n40	5190	Ant0	5148.97	-41.2	3.45	-	57.48	Peak	68.2	Pass
NVNT	n40	5190	Ant0	5149.7	-54.42	3.45	0.24	44.5	Average	54	Pass
NVNT	n40	5190	Ant0	5150	-42.33	3.45	-	56.35	Peak	68.2	Pass
NVNT	n40	5190	Ant0	5150	-54.42	3.45	0.24	44.5	Average	54	Pass
NVNT	n40	5230	Ant0	5350	-50.38	3.45	-	48.3	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5350	-57.76	3.45	0.23	41.15	Average	54	Pass
NVNT	n40	5230	Ant0	5437.32	-47.26	3.45	-	51.42	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5350.38	-56.8	3.45	0.23	42.11	Average	54	Pass
NVNT	n40	5230	Ant0	5460	-50.09	3.45	-	48.59	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5460	-58.22	3.45	0.23	40.69	Average	54	Pass

NVNT	ac20	5180	Ant0	4500	-49.68	3.45	-	49	Peak	68.2	Pass
NVNT	ac20	5180	Ant0	4500	-58.34	3.45	0.12	40.46	Average	54	Pass
NVNT	ac20	5180	Ant0	5149.6	-41.09	3.45	-	57.59	Peak	68.2	Pass
NVNT	ac20	5180	Ant0	5149.6	-53.46	3.45	0.12	45.34	Average	54	Pass
NVNT	ac20	5180	Ant0	5150	-42.94	3.45	-	55.74	Peak	68.2	Pass
NVNT	ac20	5180	Ant0	5150	-53.77	3.45	0.12	45.03	Average	54	Pass
NVNT	ac20	5240	Ant0	5350	-48.75	3.45	-	49.93	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5350	-57.37	3.45	0.12	41.43	Average	54	Pass
NVNT	ac20	5240	Ant0	5452.8	-46.78	3.45	-	51.9	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5350.8	-56.78	3.45	0.12	42.02	Average	54	Pass
NVNT	ac20	5240	Ant0	5460	-50.03	3.45	-	48.65	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5460	-57.84	3.45	0.12	40.96	Average	54	Pass
NVNT	ac40	5190	Ant0	4500	-48.41	3.45	-	50.27	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	4500	-58.23	3.45	0.24	40.69	Average	54	Pass
NVNT	ac40	5190	Ant0	5149.7	-39.59	3.45	-	59.09	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	5149.7	-53.39	3.45	0.24	45.53	Average	54	Pass
NVNT	ac40	5190	Ant0	5150	-39.59	3.45	-	59.09	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	5150	-53.39	3.45	0.24	45.53	Average	54	Pass
NVNT	ac40	5230	Ant0	5350	-49.56	3.45	-	49.12	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5350	-57.28	3.45	0.24	41.64	Average	54	Pass
NVNT	ac40	5230	Ant0	5454.6	-46.45	3.45	-	52.23	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5351.73	-56.81	3.45	0.24	42.11	Average	54	Pass
NVNT	ac40	5230	Ant0	5460	-51.17	3.45	-	47.51	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5460	-58.06	3.45	0.24	40.86	Average	54	Pass
NVNT	ac80	5210	Ant0	5350	-49.06	3.45	-	49.62	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5350	-56.89	3.45	0.25	42.04	Average	54	Pass
NVNT	ac80	5210	Ant0	5369.25	-46.42	3.45	-	52.26	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5351.1	-55.97	3.45	0.25	42.96	Average	54	Pass
NVNT	ac80	5210	Ant0	5460	-50.23	3.45	-	48.45	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5460	-57.26	3.45	0.25	41.67	Average	54	Pass
NVNT	ac80	5210	Ant0	4500	-50.16	3.45	-	48.52	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	4500	-58.57	3.45	0.25	40.36	Average	54	Pass
NVNT	ac80	5210	Ant0	5147.01	-43.79	3.45	-	54.89	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5149.38	-54.37	3.45	0.25	44.56	Average	54	Pass
NVNT	ac80	5210	Ant0	5150	-43.84	3.45	-	54.84	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5150	-54.59	3.45	0.25	44.34	Average	54	Pass
NVNT	ax20	5180	Ant0	4500	-51.24	3.45	-	47.44	Peak	68.2	Pass
NVNT	ax20	5180	Ant0	4500	-58.16	3.45	0.12	40.64	Average	54	Pass
NVNT	ax20	5180	Ant0	5148.9	-40.84	3.45	-	57.84	Peak	68.2	Pass
NVNT	ax20	5180	Ant0	5148.9	-53.45	3.45	0.12	45.35	Average	54	Pass
NVNT	ax20	5180	Ant0	5150	-38.67	3.45	-	60.01	Peak	68.2	Pass

NVNT	ax20	5180	Ant0	5150	-53.05	3.45	0.12	45.75	Average	54	Pass
NVNT	ax20	5240	Ant0	5350	-49.15	3.45	-	49.53	Peak	68.2	Pass
NVNT	ax20	5240	Ant0	5350	-57.57	3.45	0.12	41.23	Average	54	Pass
NVNT	ax20	5240	Ant0	5361.12	-46.69	3.45	-	51.99	Peak	68.2	Pass
NVNT	ax20	5240	Ant0	5352	-56.87	3.45	0.12	41.93	Average	54	Pass
NVNT	ax20	5240	Ant0	5460	-51.52	3.45	-	47.16	Peak	68.2	Pass
NVNT	ax20	5240	Ant0	5460	-58.51	3.45	0.12	40.29	Average	54	Pass
NVNT	ax40	5190	Ant0	4500	-50.78	3.45	-	47.9	Peak	68.2	Pass
NVNT	ax40	5190	Ant0	4500	-58.2	3.45	0.23	40.71	Average	54	Pass
NVNT	ax40	5190	Ant0	5149.7	-40.02	3.45	-	58.66	Peak	68.2	Pass
NVNT	ax40	5190	Ant0	5148.24	-53.51	3.45	0.23	45.4	Average	54	Pass
NVNT	ax40	5190	Ant0	5150	-40.02	3.45	-	58.66	Peak	68.2	Pass
NVNT	ax40	5190	Ant0	5150	-53.59	3.45	0.23	45.32	Average	54	Pass
NVNT	ax40	5230	Ant0	5350	-49.98	3.45	-	48.7	Peak	68.2	Pass
NVNT	ax40	5230	Ant0	5350	-57.7	3.45	0.24	41.22	Average	54	Pass
NVNT	ax40	5230	Ant0	5363.88	-47.03	3.45	-	51.65	Peak	68.2	Pass
NVNT	ax40	5230	Ant0	5373.06	-56.82	3.45	0.24	42.1	Average	54	Pass
NVNT	ax40	5230	Ant0	5460	-50.5	3.45	-	48.18	Peak	68.2	Pass
NVNT	ax40	5230	Ant0	5460	-57.77	3.45	0.24	41.15	Average	54	Pass
NVNT	ax80	5210	Ant0	5350	-48.12	3.45	-	50.56	Peak	68.2	Pass
NVNT	ax80	5210	Ant0	5350	-57.71	3.45	0.25	41.22	Average	54	Pass
NVNT	ax80	5210	Ant0	5373.54	-46.22	3.45	-	52.46	Peak	68.2	Pass
NVNT	ax80	5210	Ant0	5376.51	-56.19	3.45	0.25	42.74	Average	54	Pass
NVNT	ax80	5210	Ant0	5460	-48.86	3.45	-	49.82	Peak	68.2	Pass
NVNT	ax80	5210	Ant0	5460	-57.62	3.45	0.25	41.31	Average	54	Pass
NVNT	ax80	5210	Ant0	4500	-49.93	3.45	-	48.75	Peak	68.2	Pass
NVNT	ax80	5210	Ant0	4500	-58.55	3.45	0.25	40.38	Average	54	Pass
NVNT	ax80	5210	Ant0	5146.22	-43.5	3.45	-	55.18	Peak	68.2	Pass
NVNT	ax80	5210	Ant0	5148.59	-54.23	3.45	0.25	44.7	Average	54	Pass
NVNT	ax80	5210	Ant0	5150	-44.22	3.45	-	54.46	Peak	68.2	Pass
NVNT	ax80	5210	Ant0	5150	-54.19	3.45	0.25	44.74	Average	54	Pass

Test Graphs

Restrict Band NVNT a 5180MHz Ant0 Peak

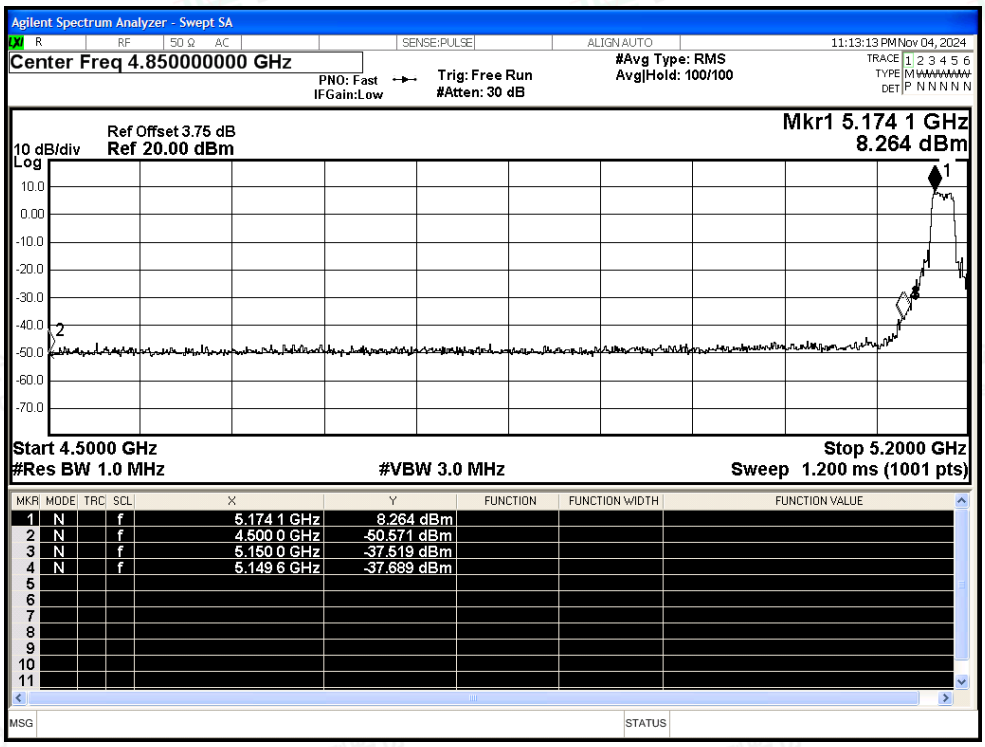

Restrict Band NVNT a 5180MHz Ant0 Average

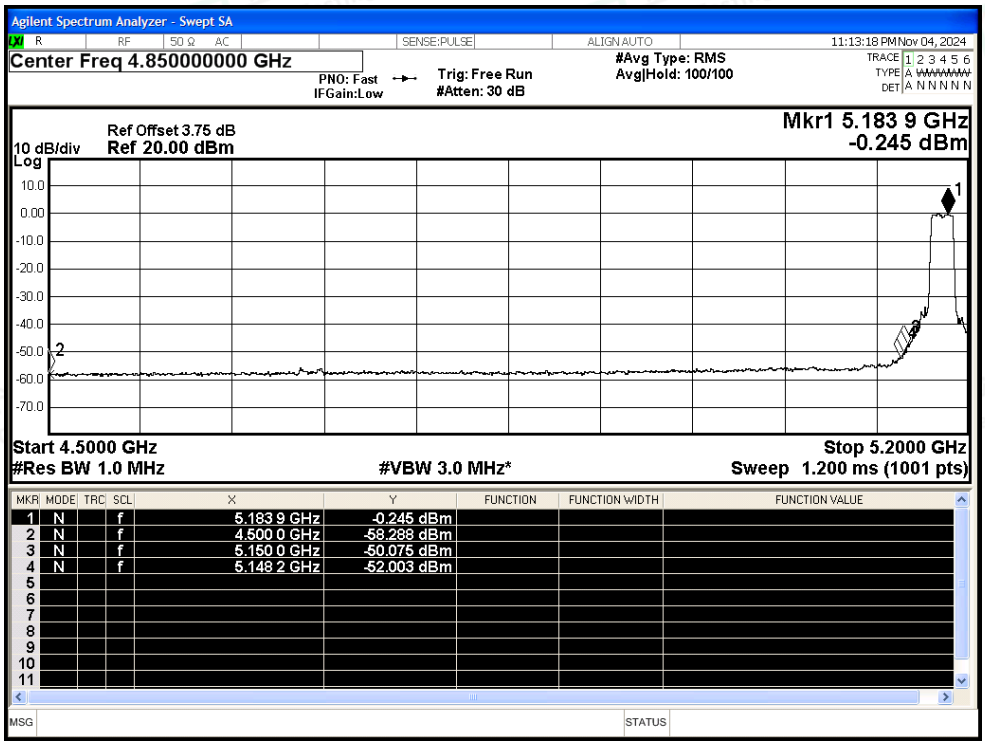

Restrict Band NVNT a 5240MHz Ant0 Peak

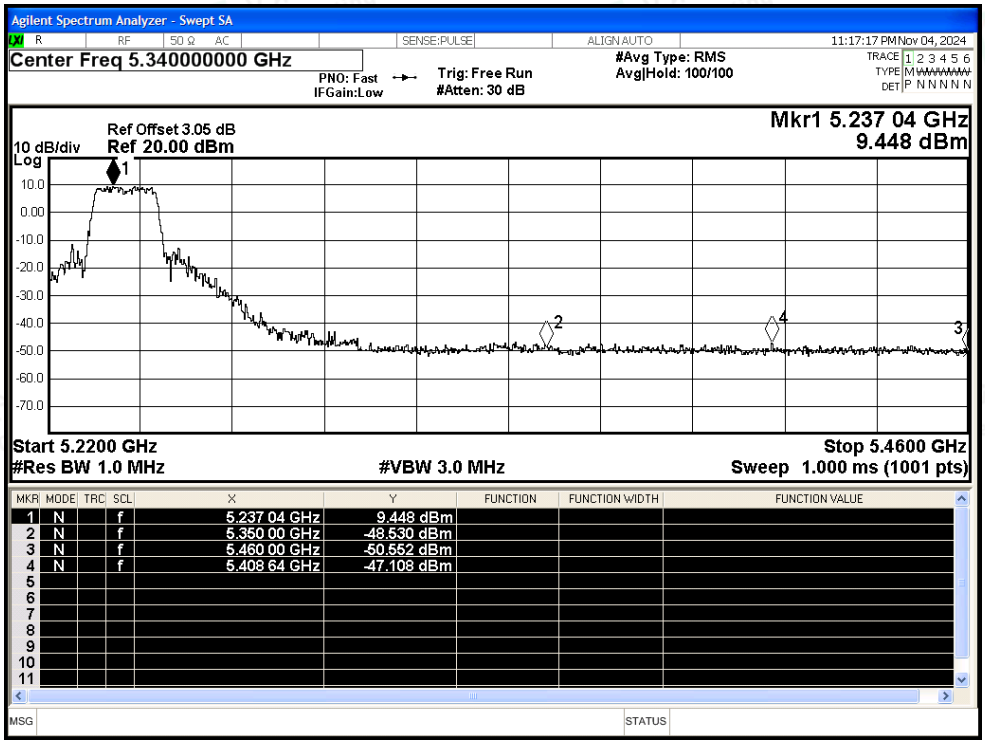

Restrict Band NVNT a 5240MHz Ant0 Average

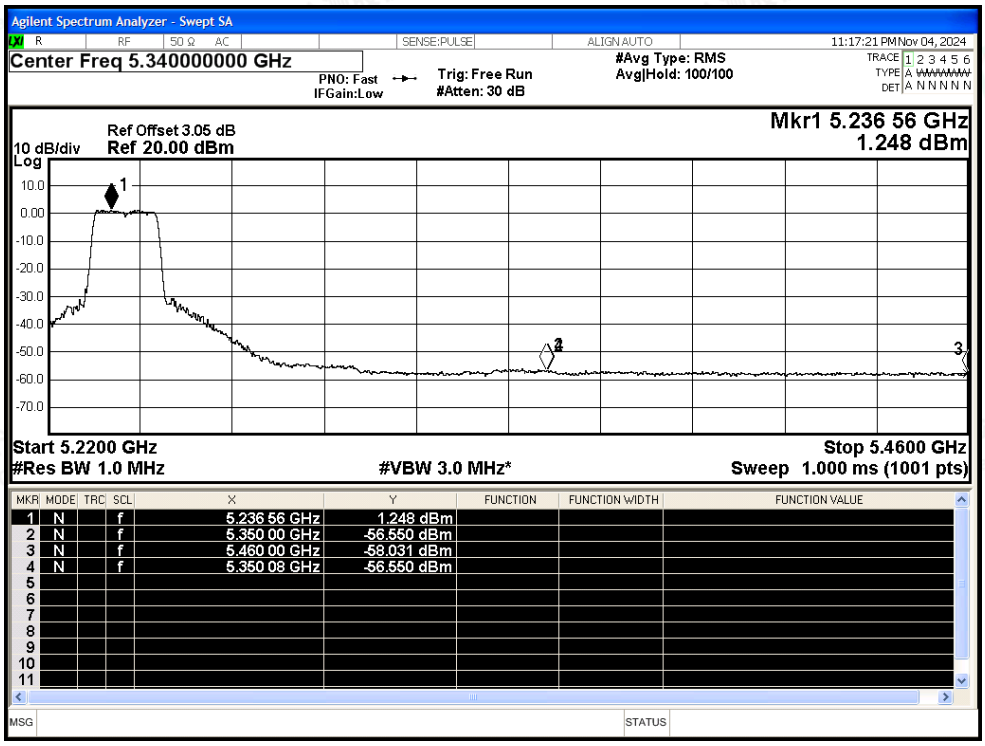

Restrict Band NVNT n20 5180MHz Ant0 Peak

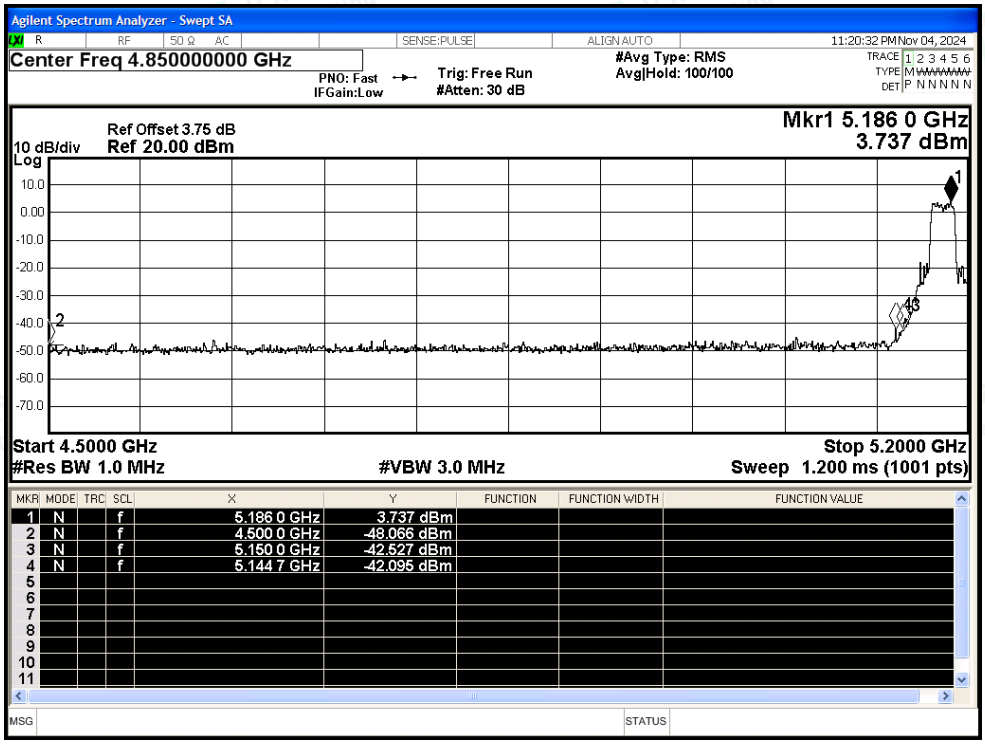

Restrict Band NVNT n20 5180MHz Ant0 Average

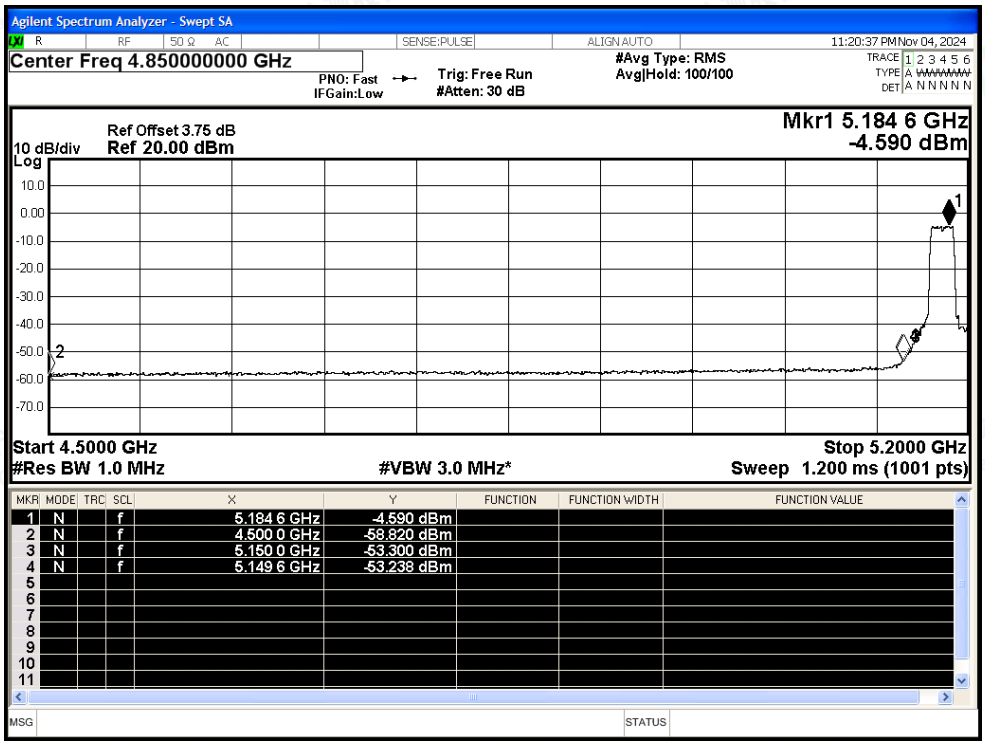

Restrict Band NVNT n20 5240MHz Ant0 Peak

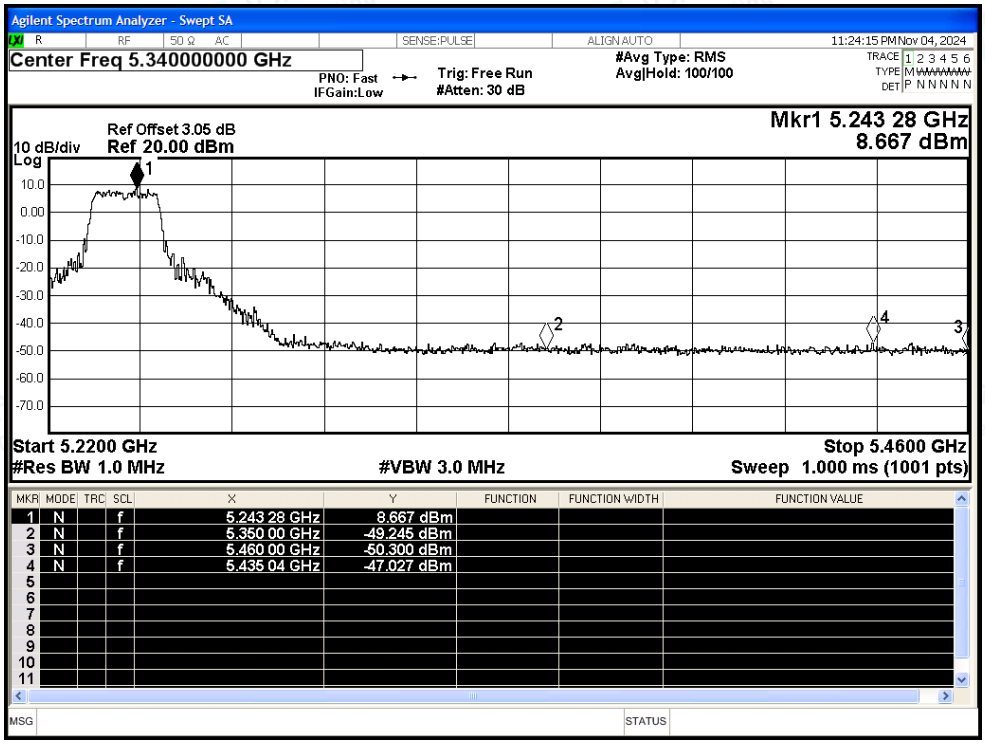

Restrict Band NVNT n20 5240MHz Ant0 Average

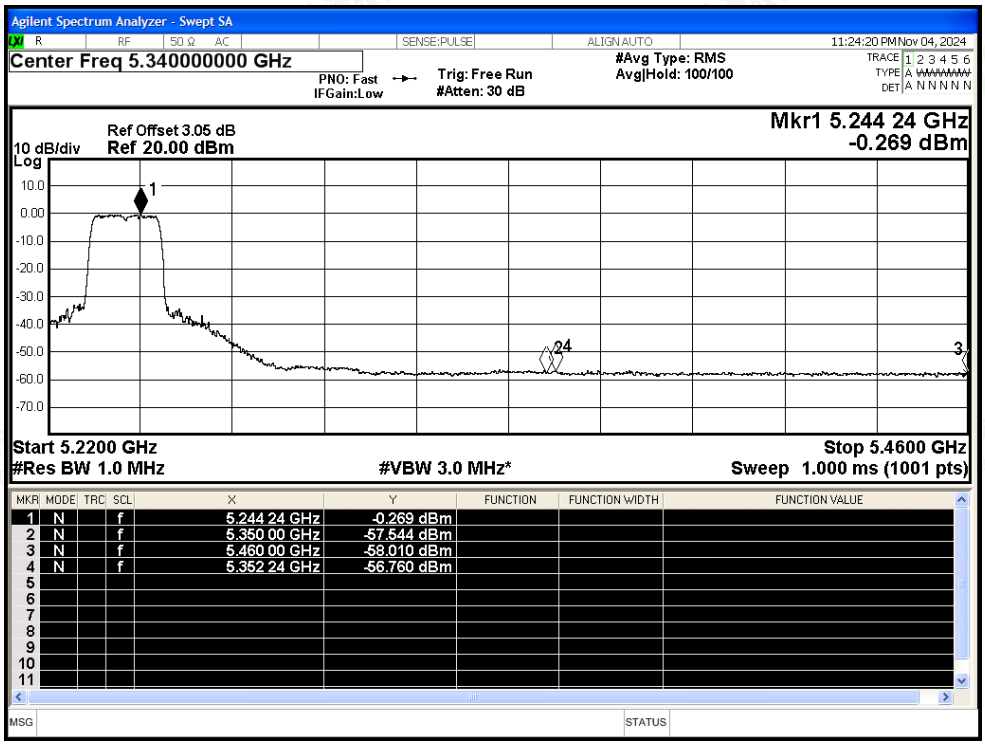

Restrict Band NVNT n40 5190MHz Ant0 Peak

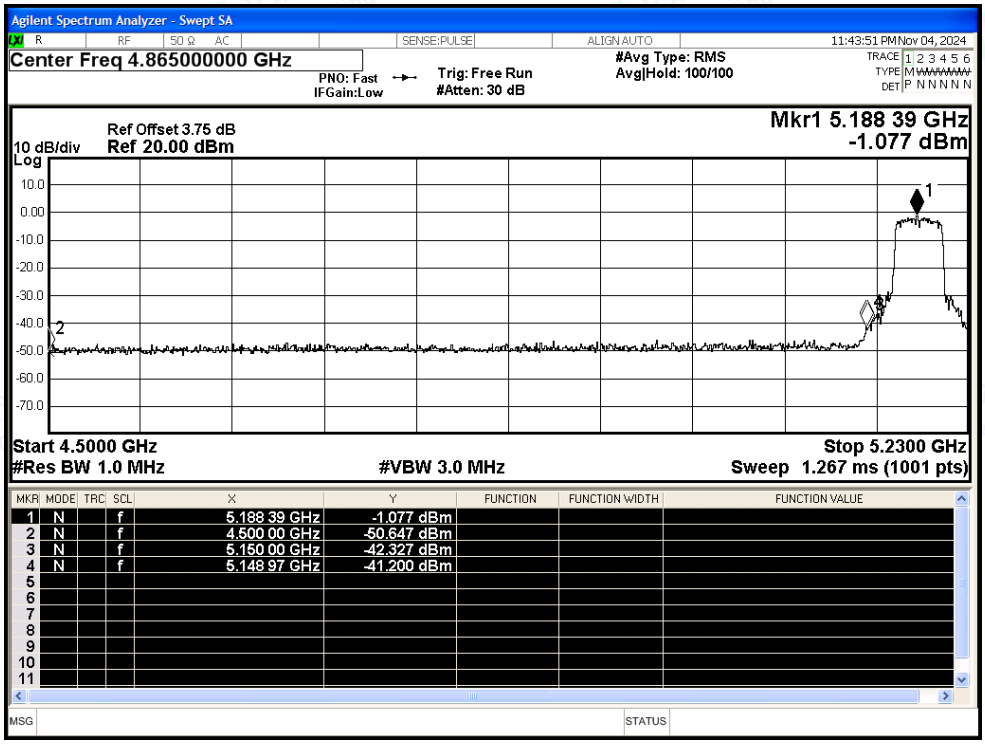

Restrict Band NVNT n40 5190MHz Ant0 Average

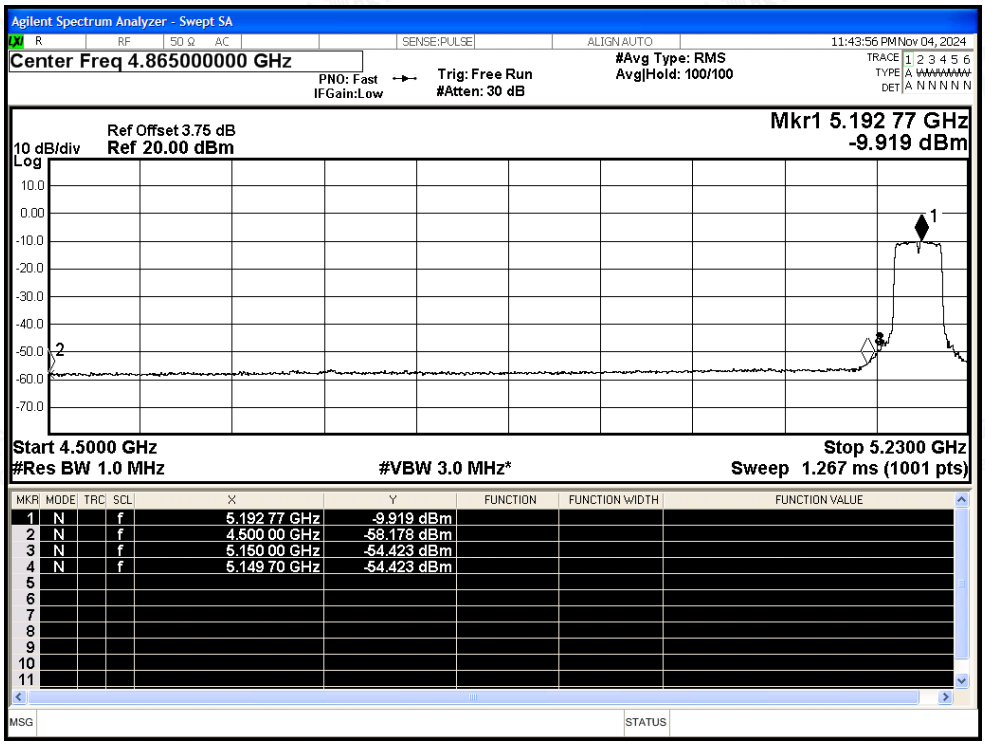

Restrict Band NVNT n40 5230MHz Ant0 Peak

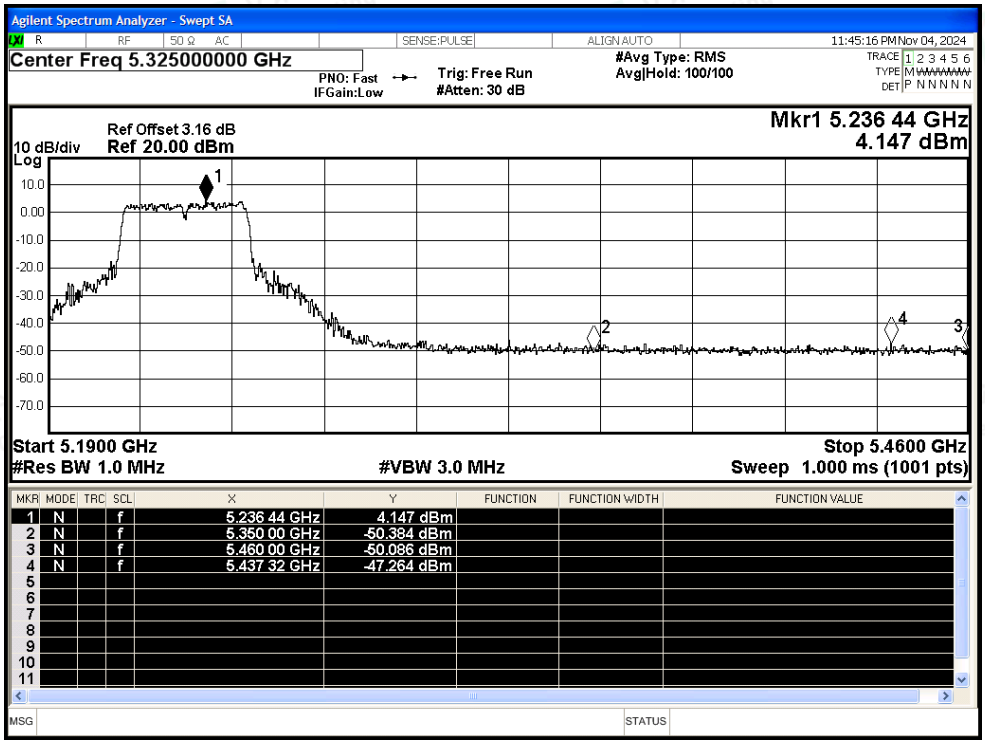

Restrict Band NVNT n40 5230MHz Ant0 Average

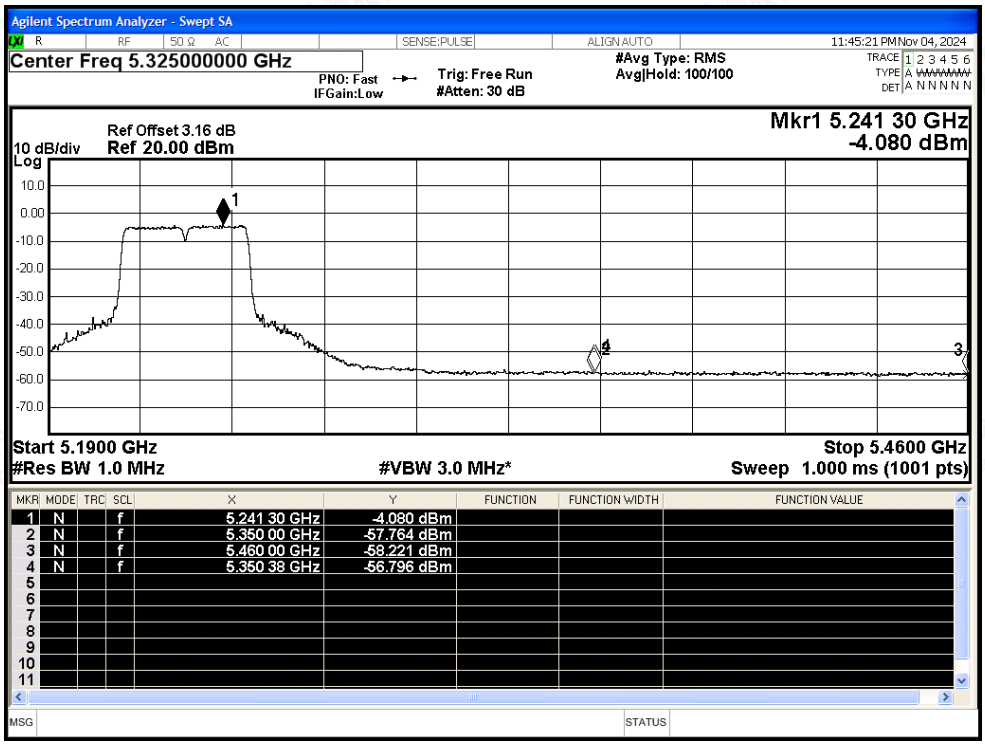

Restrict Band NVNT ac20 5180MHz Ant0 Peak

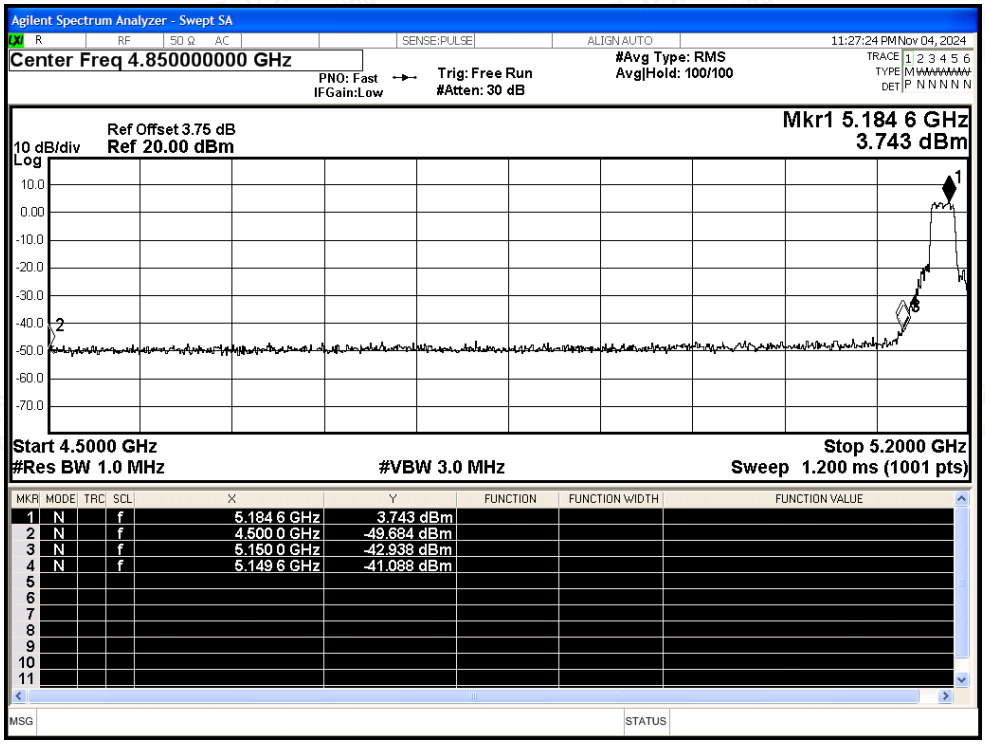

Restrict Band NVNT ac20 5180MHz Ant0 Average

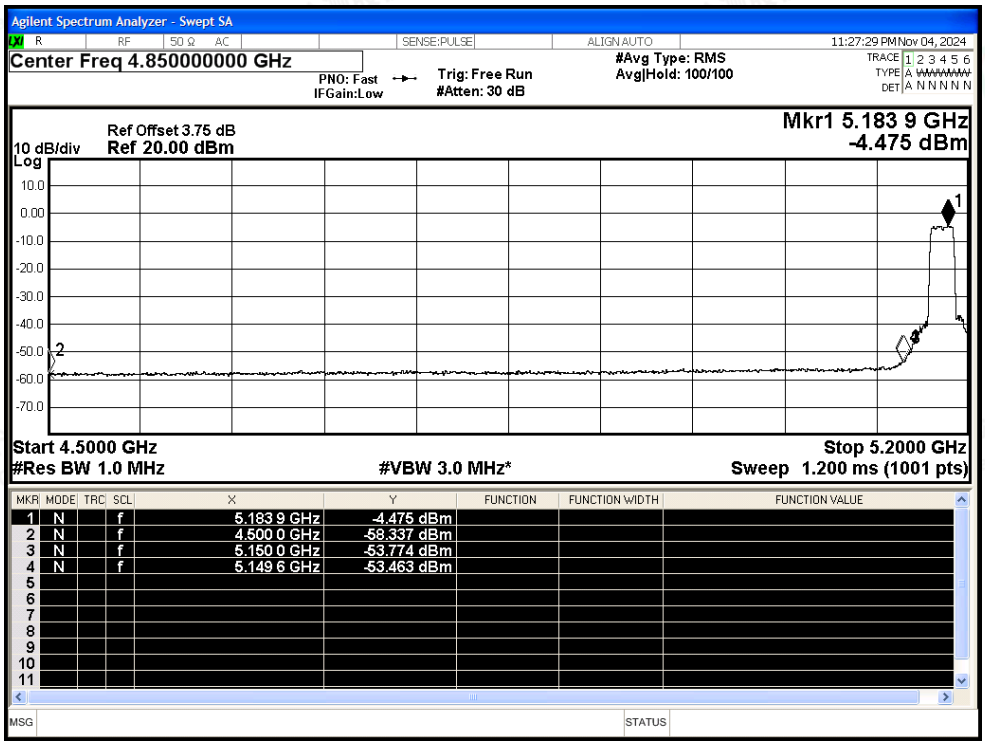

Restrict Band NVNT ac20 5240MHz Ant0 Peak

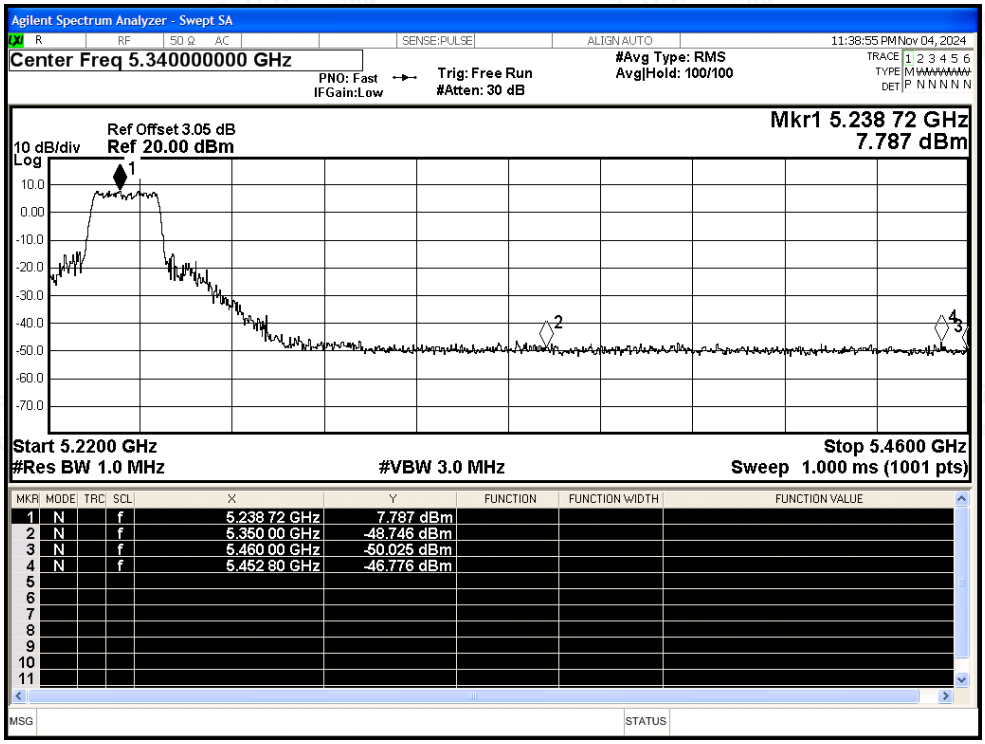

Restrict Band NVNT ac20 5240MHz Ant0 Average

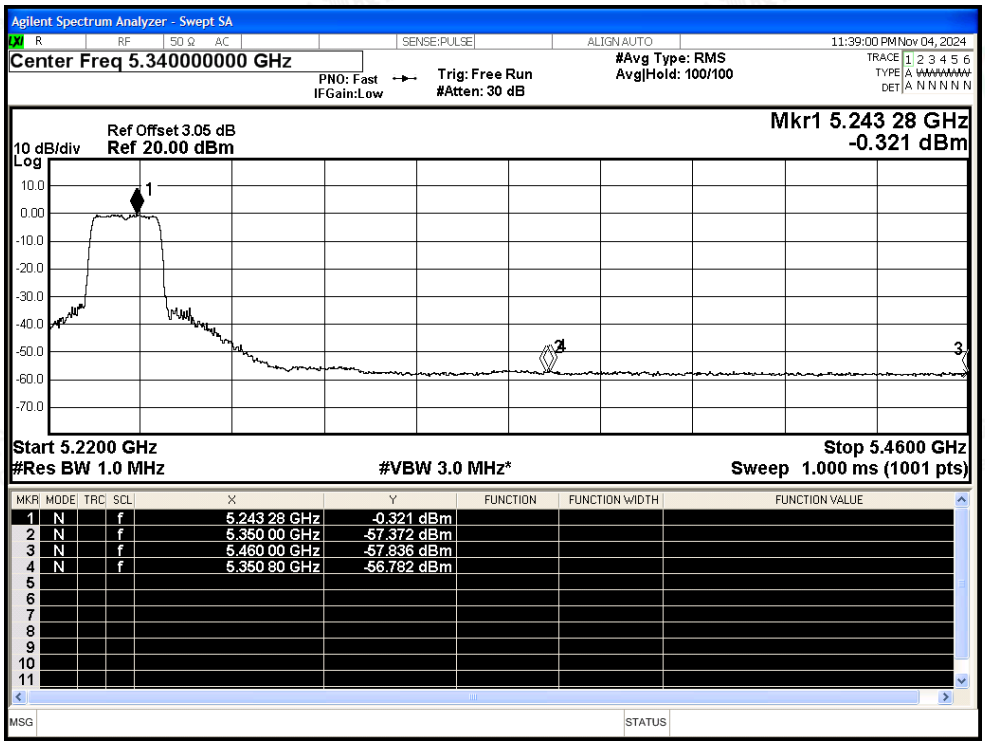

Restrict Band NVNT ac40 5190MHz Ant0 Peak

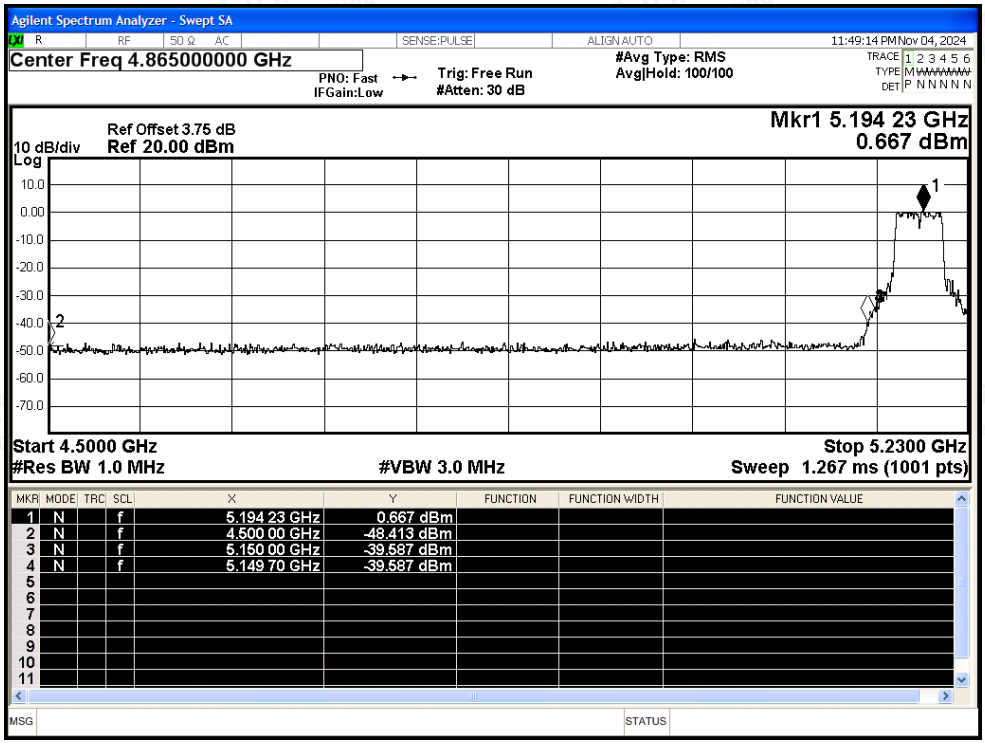

Restrict Band NVNT ac40 5190MHz Ant0 Average

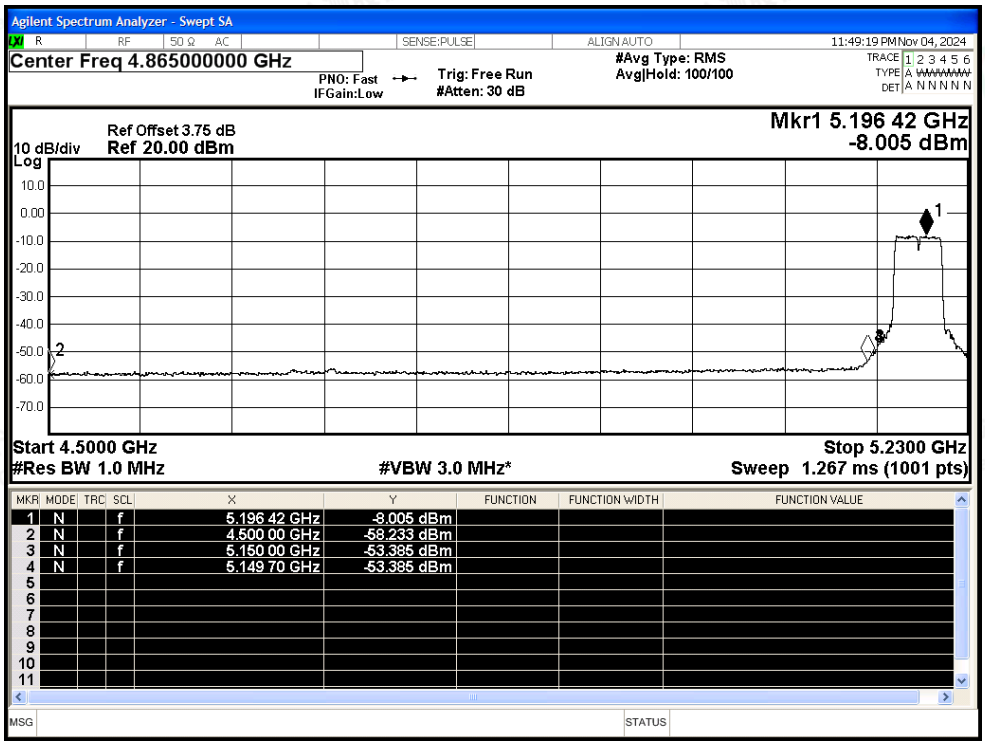

Restrict Band NVNT ac40 5230MHz Ant0 Peak

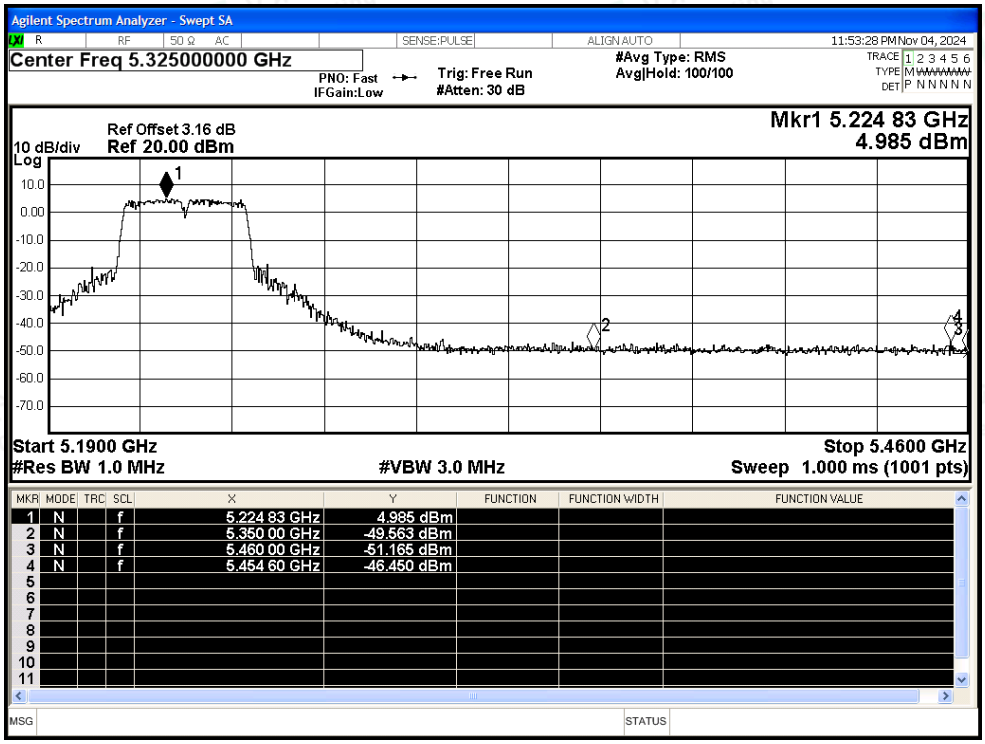

Restrict Band NVNT ac40 5230MHz Ant0 Average

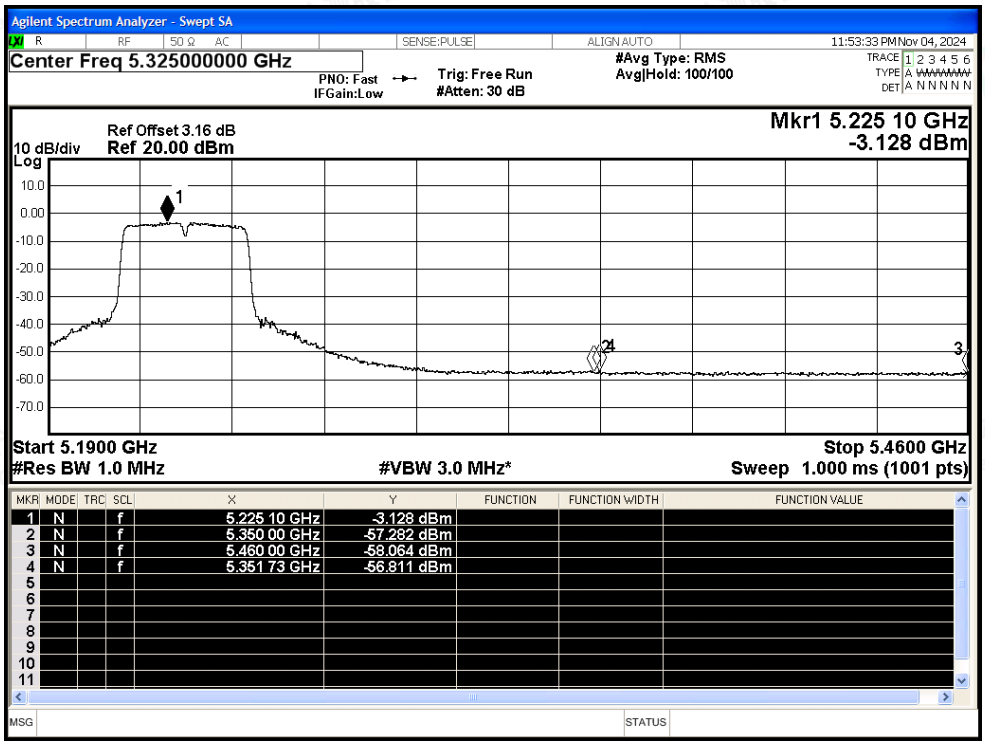

Restrict Band NVNT ac80 5210MHz Ant0 Peak

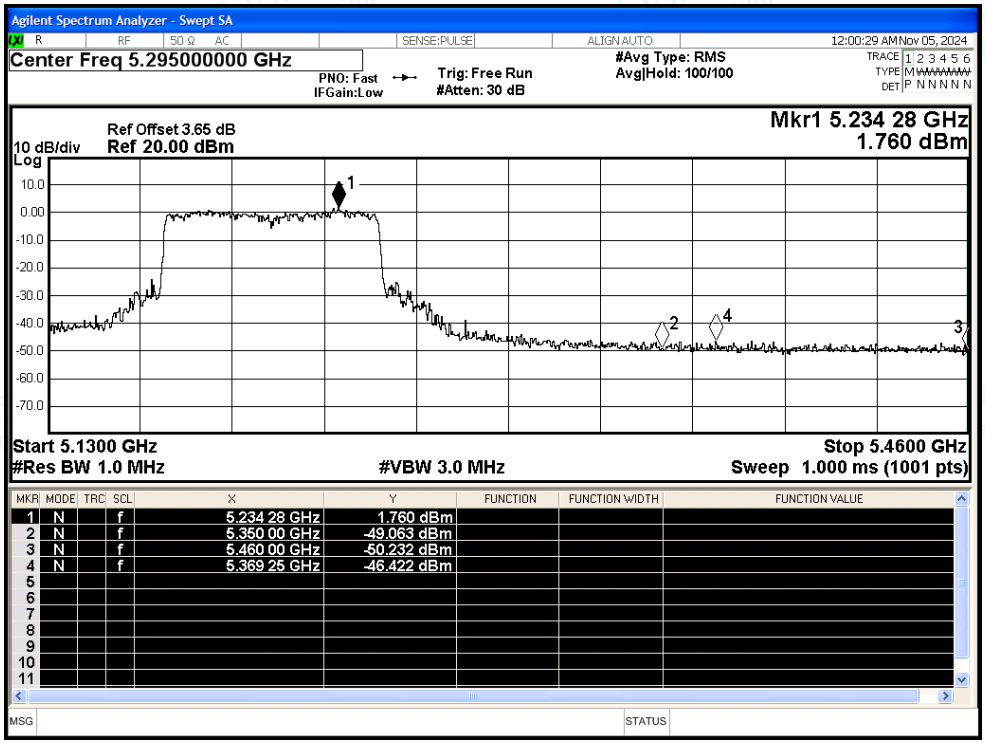

Restrict Band NVNT ac80 5210MHz Ant0 Average

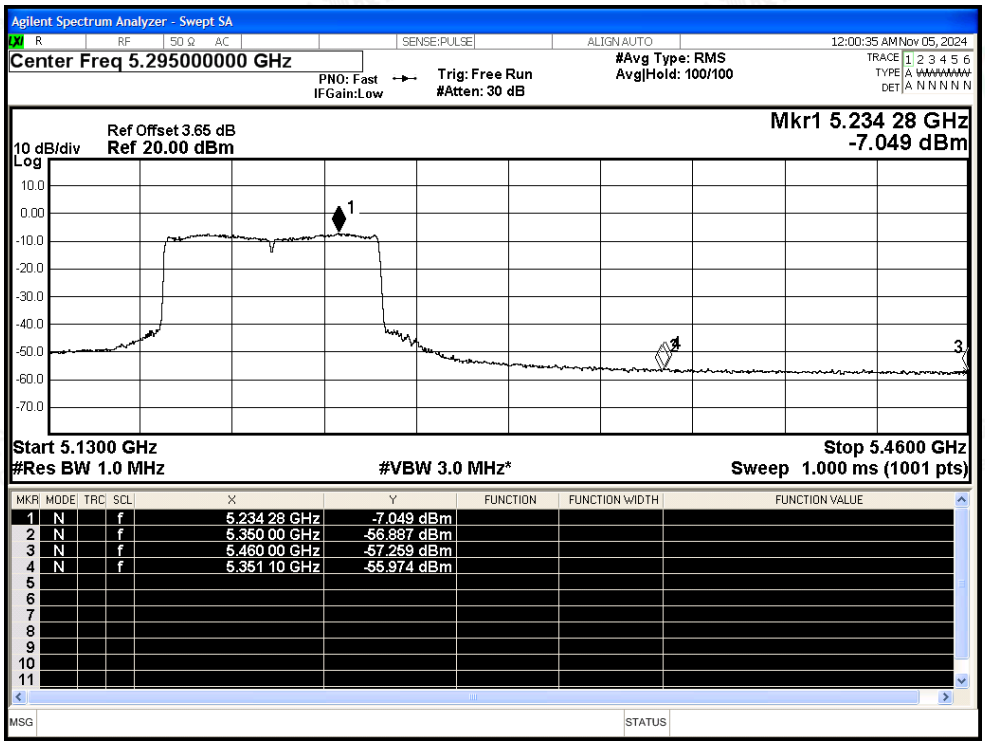

Restrict Band NVNT ac80 5210MHz Ant0 Peak

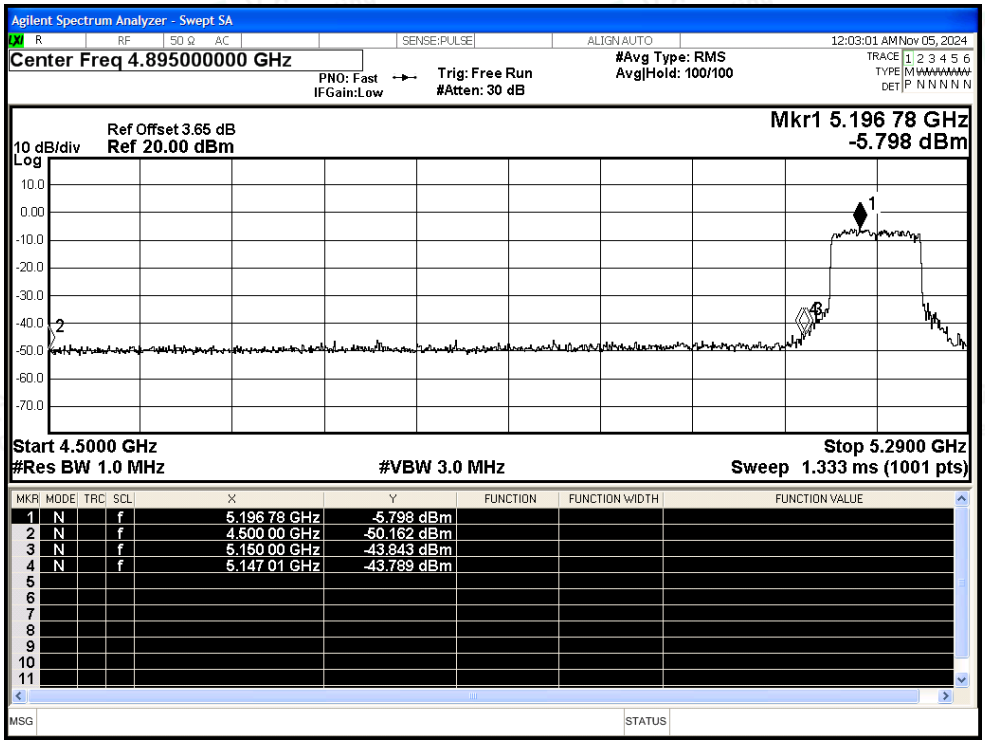

Restrict Band NVNT ac80 5210MHz Ant0 Average

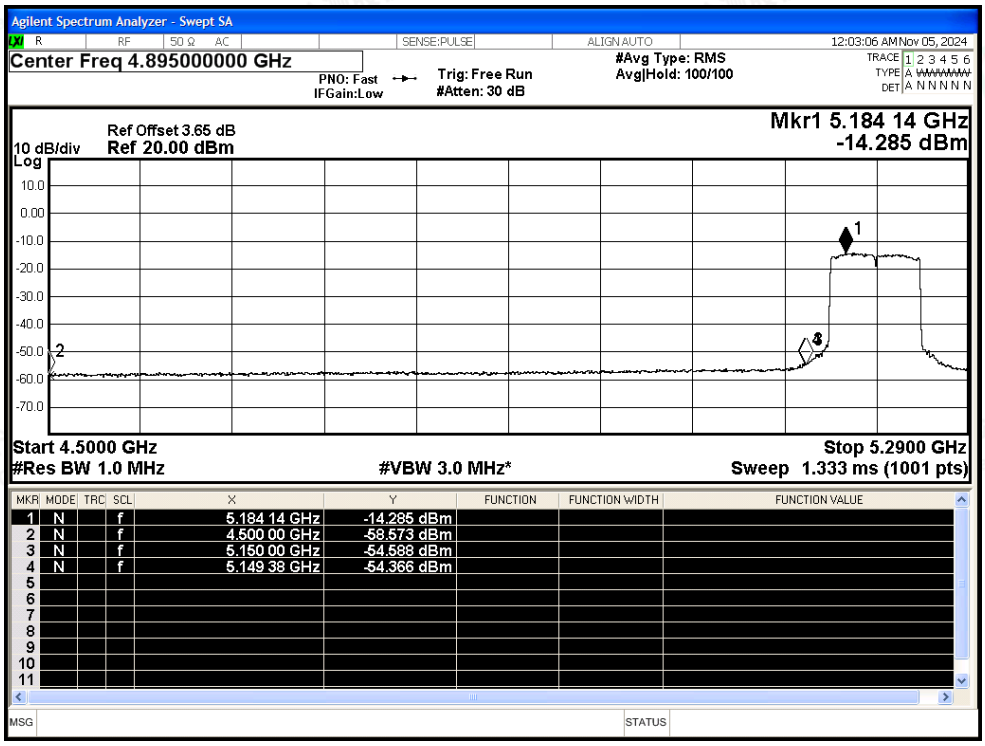

Restrict Band NVNT ax20 5180MHz Ant0 Peak

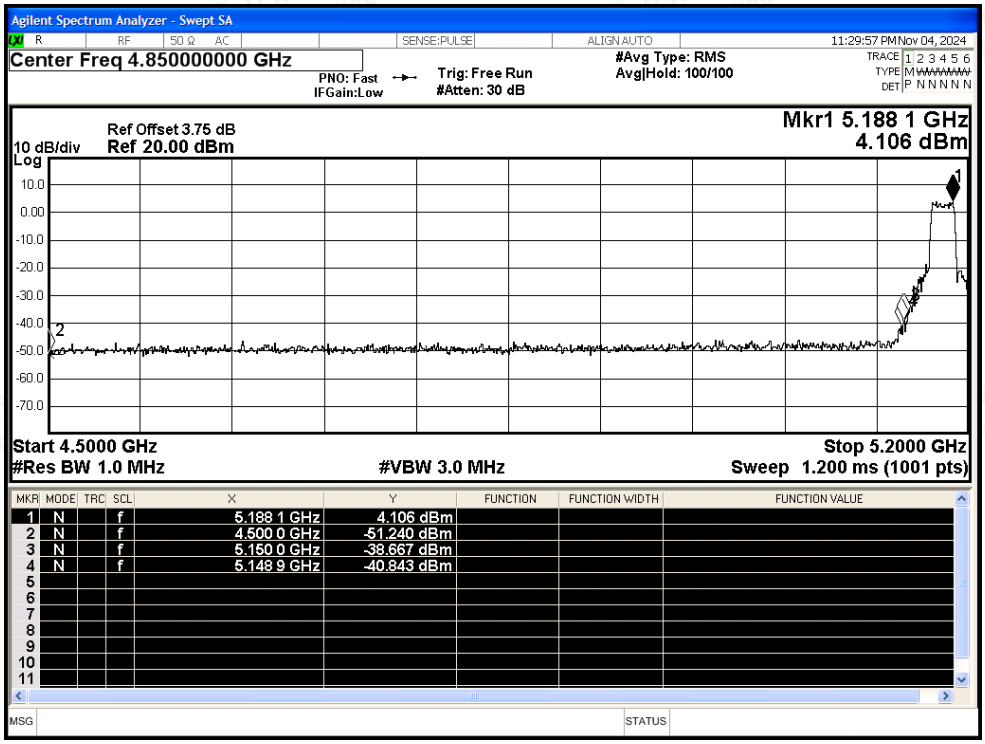

Restrict Band NVNT ax20 5180MHz Ant0 Average

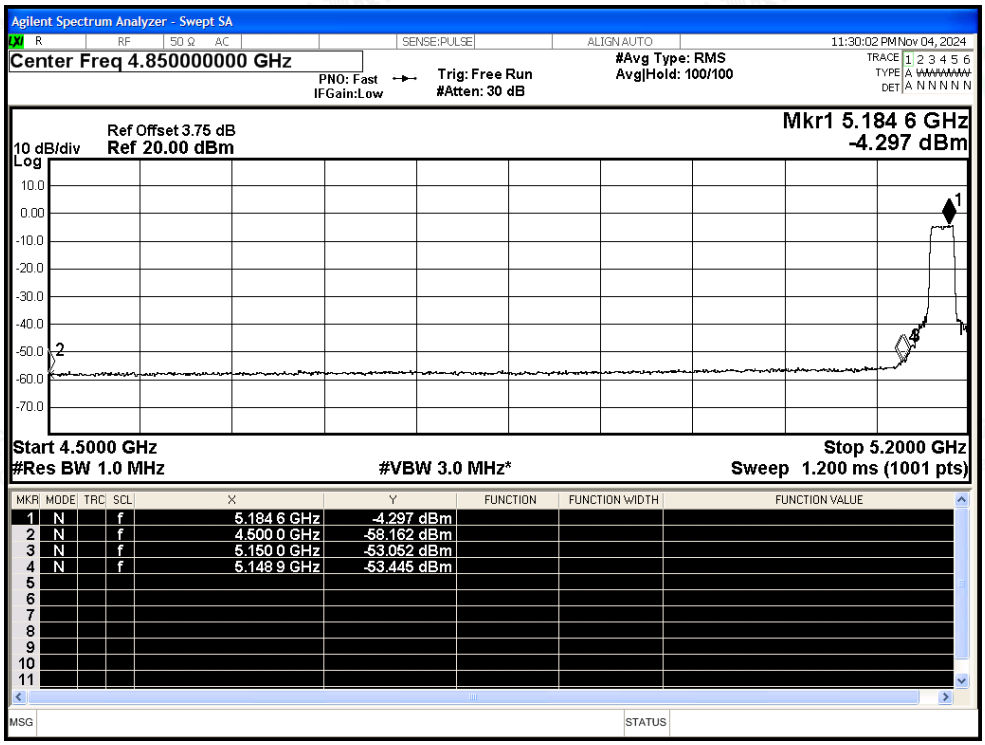

Restrict Band NVNT ax20 5240MHz Ant0 Peak

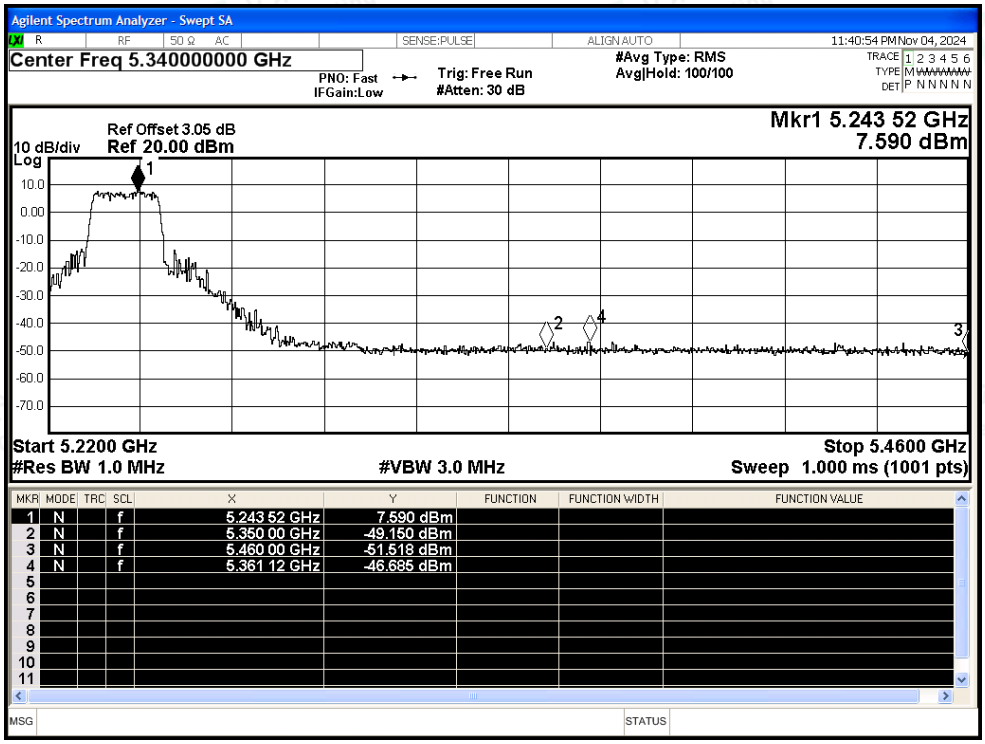

Restrict Band NVNT ax20 5240MHz Ant0 Average

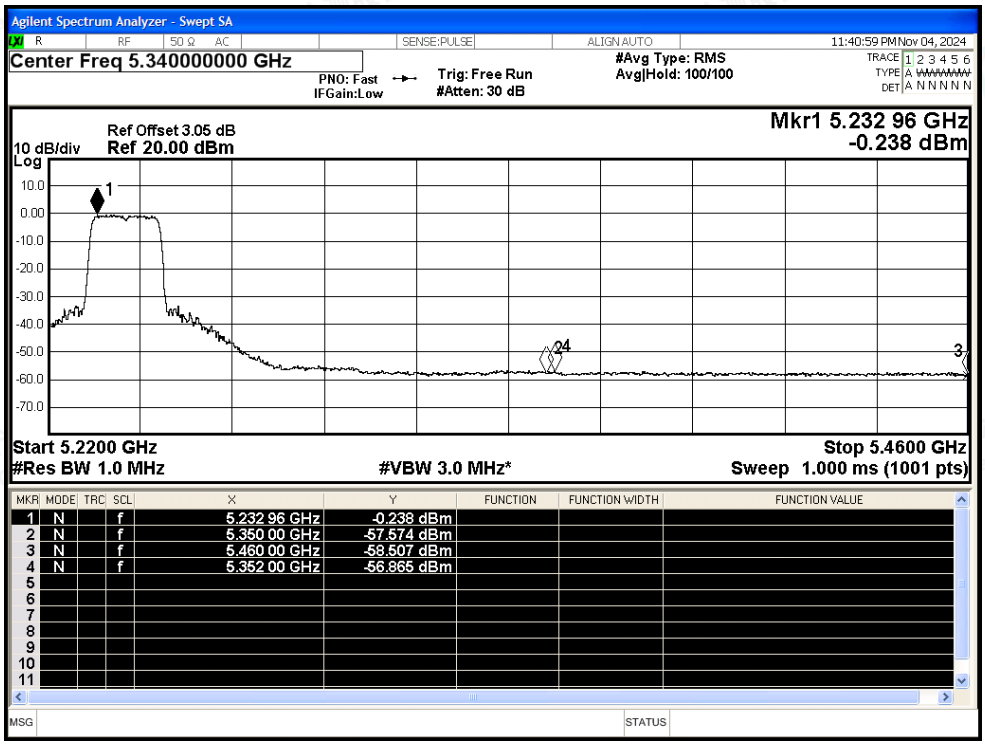

Restrict Band NVNT ax40 5190MHz Ant0 Peak

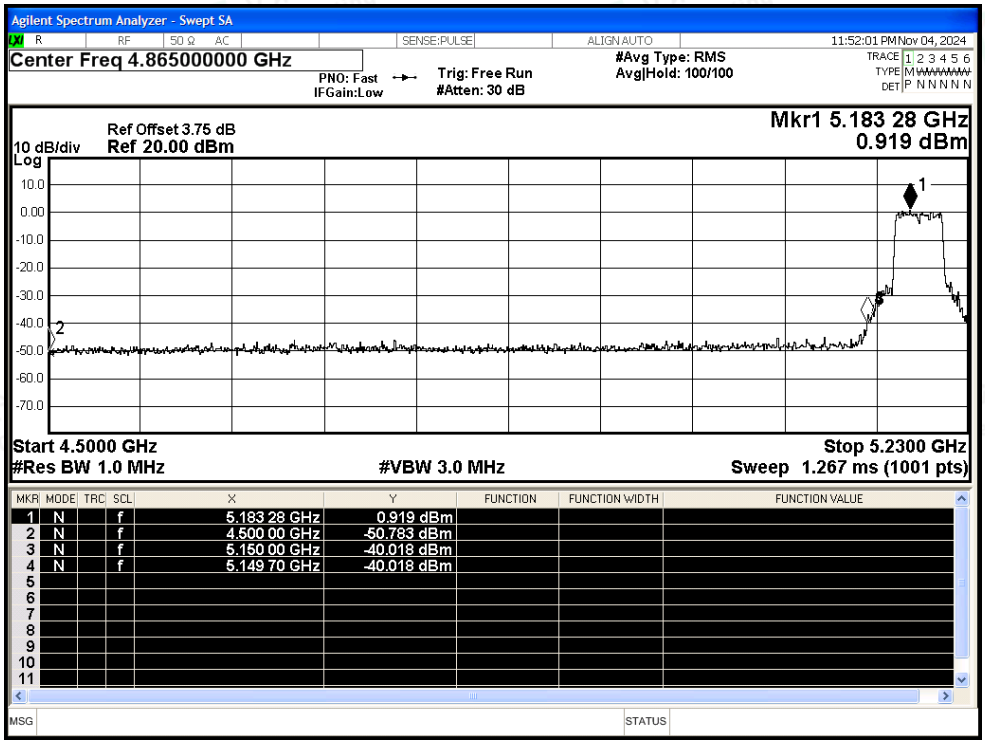

Restrict Band NVNT ax40 5190MHz Ant0 Average

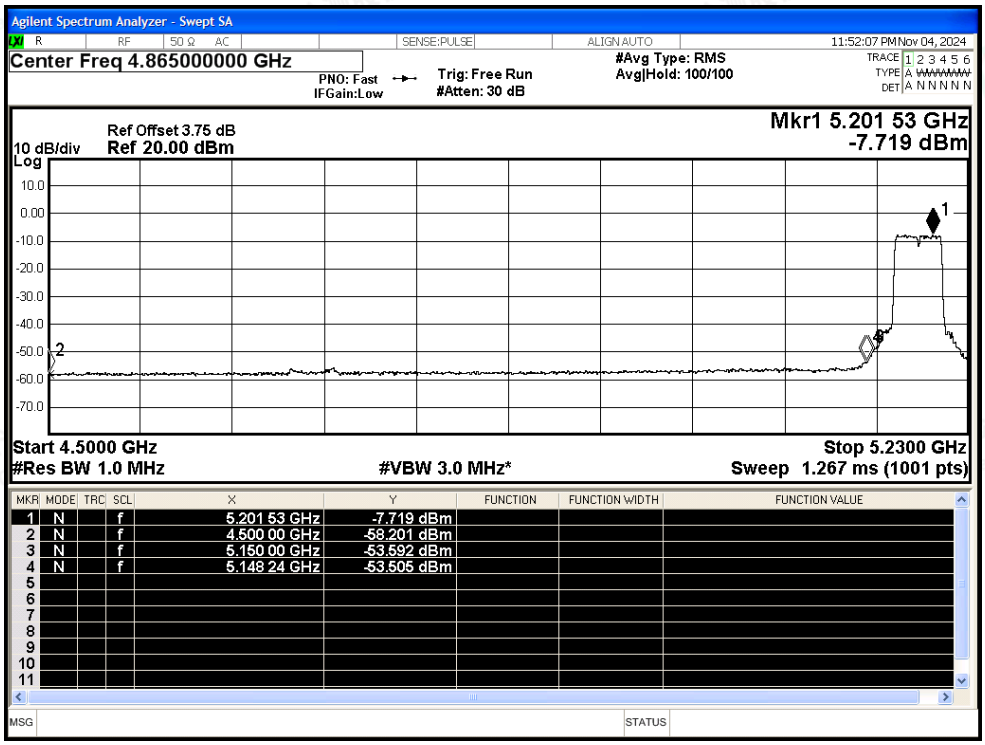

Restrict Band NVNT ax40 5230MHz Ant0 Peak

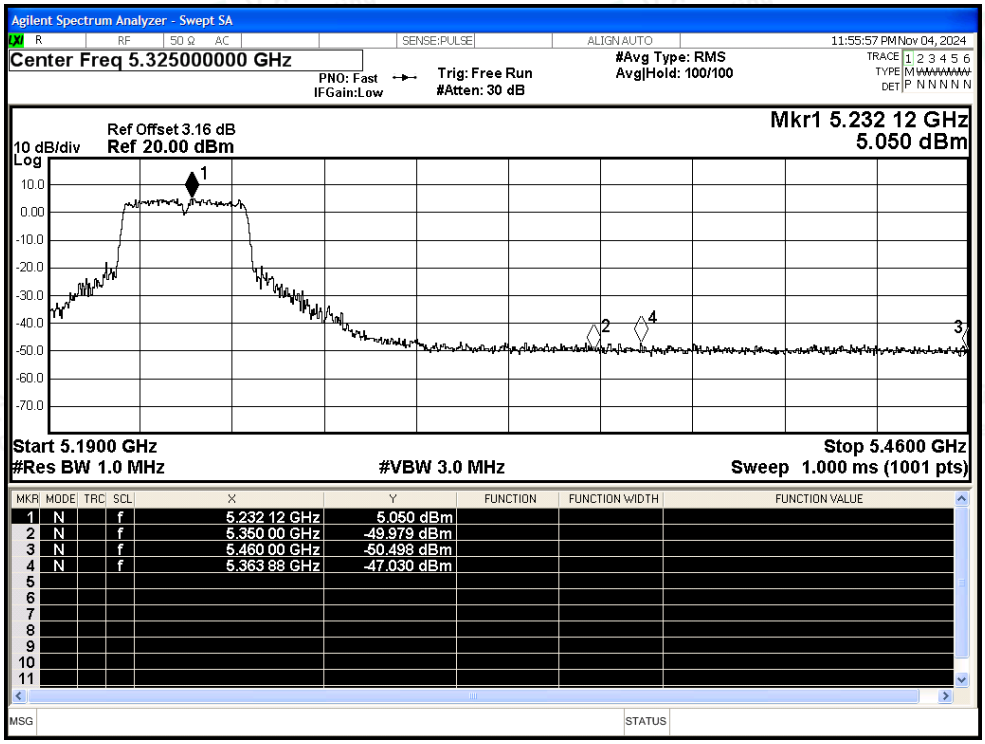

Restrict Band NVNT ax40 5230MHz Ant0 Average

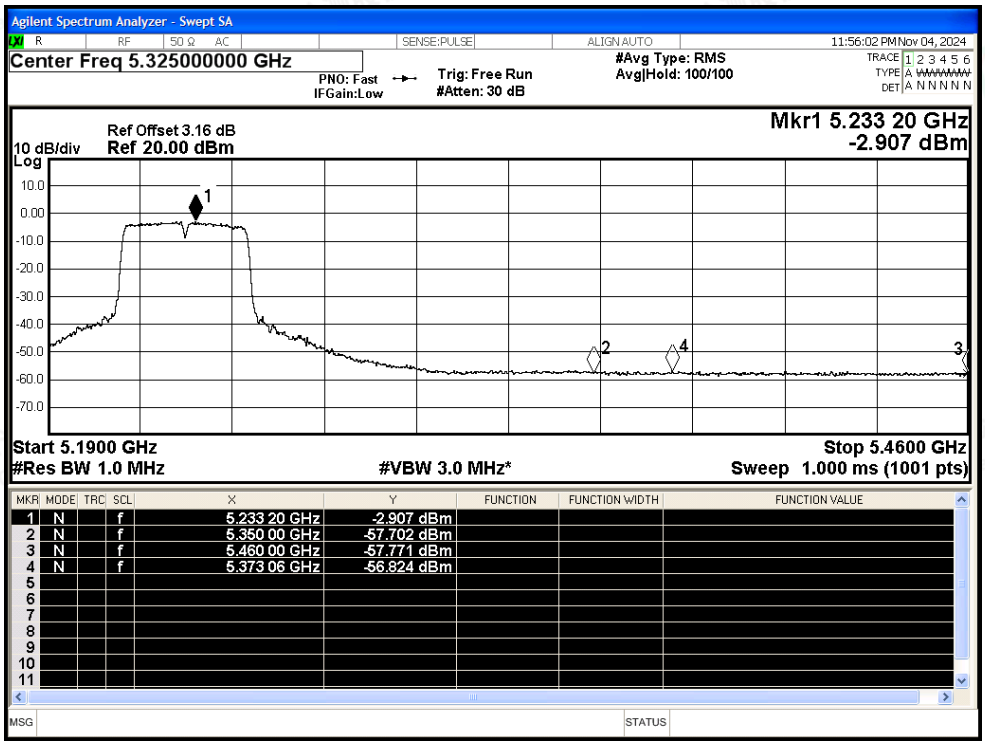

Restrict Band NVNT ax80 5210MHz Ant0 Peak

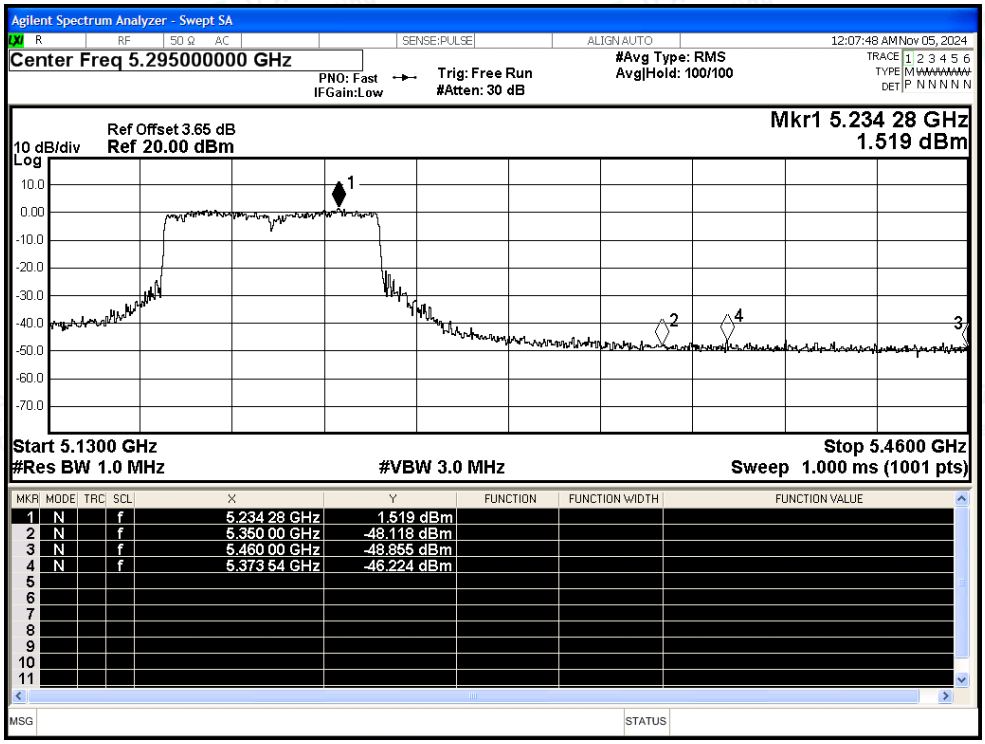

Restrict Band NVNT ax80 5210MHz Ant0 Average

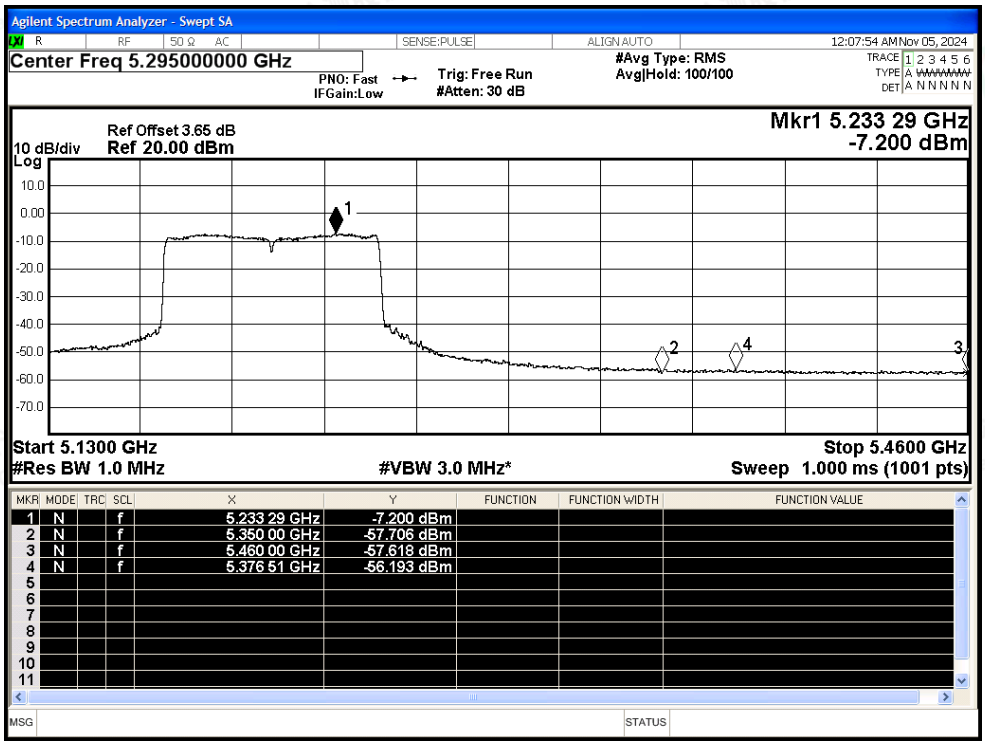

Restrict Band NVNT ax80 5210MHz Ant0 Peak

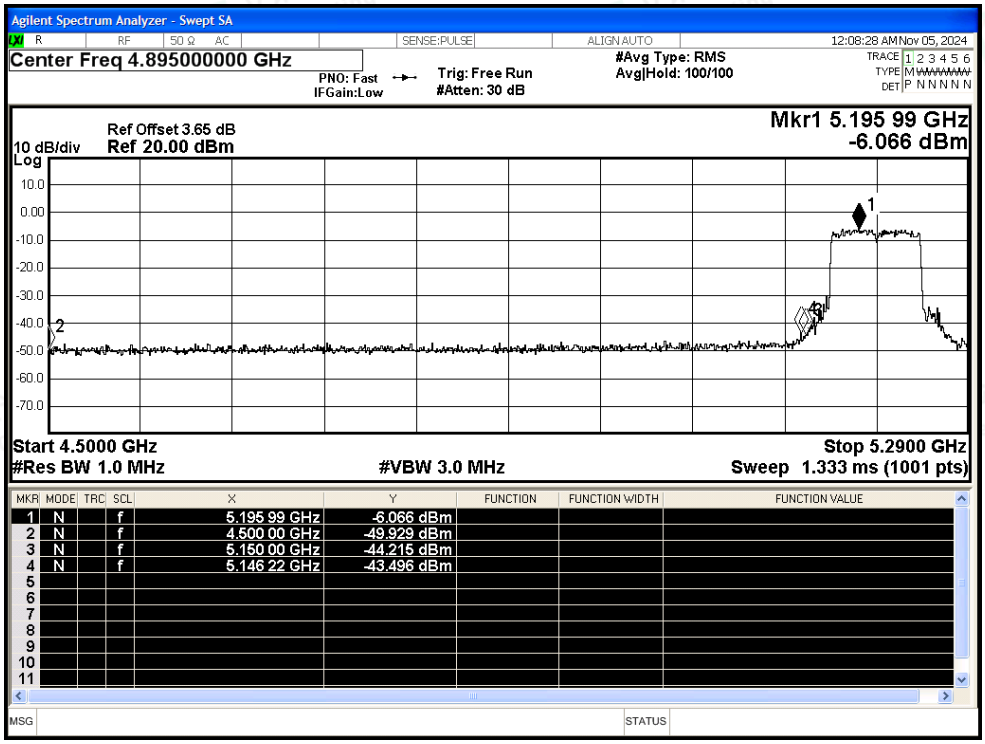

Restrict Band NVNT ax80 5210MHz Ant0 Average

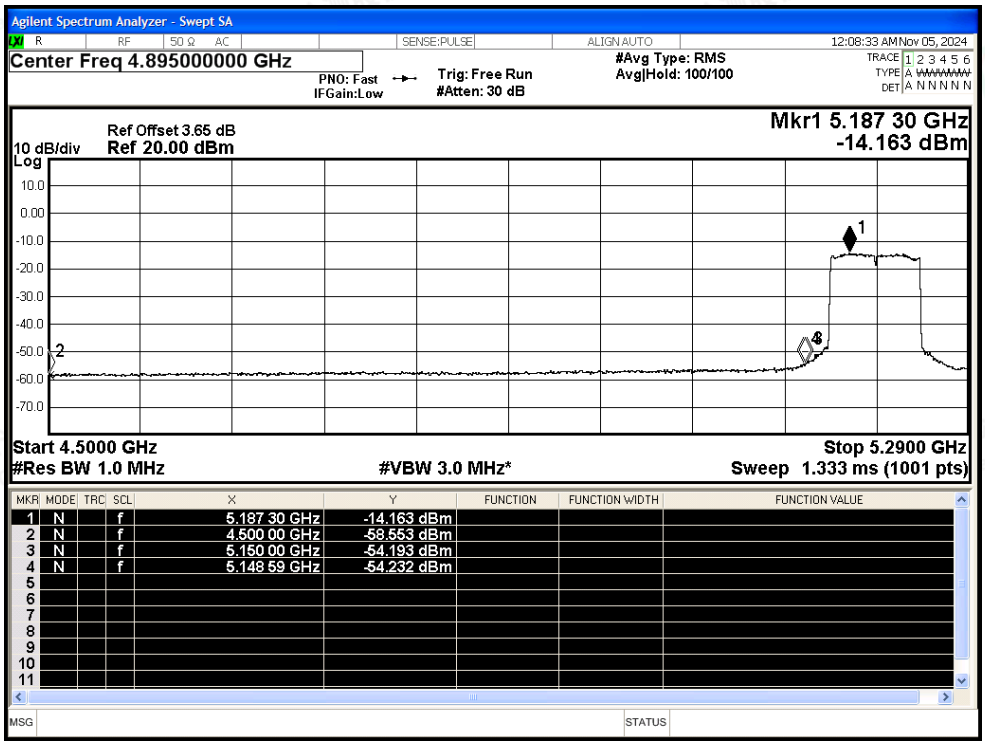

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant1	4500	-50.59	2.92	-	47.56	Peak	68.2	Pass
NVNT	a	5180	Ant1	4500	-58.26	2.92	0.24	40.13	Average	54	Pass
NVNT	a	5180	Ant1	5148.9	-43.3	2.92	-	54.85	Peak	68.2	Pass
NVNT	a	5180	Ant1	5147.5	-54.9	2.92	0.24	43.49	Average	54	Pass
NVNT	a	5180	Ant1	5150	-43.83	2.92	-	54.32	Peak	68.2	Pass
NVNT	a	5180	Ant1	5150	-54.73	2.92	0.24	43.66	Average	54	Pass
NVNT	a	5240	Ant1	5350	-49.1	2.92	-	49.05	Peak	68.2	Pass
NVNT	a	5240	Ant1	5350	-57.24	2.92	0.24	41.15	Average	54	Pass
NVNT	a	5240	Ant1	5367.36	-46.84	2.92	-	51.31	Peak	68.2	Pass
NVNT	a	5240	Ant1	5351.76	-57.04	2.92	0.24	41.35	Average	54	Pass
NVNT	a	5240	Ant1	5460	-50.4	2.92	-	47.75	Peak	68.2	Pass
NVNT	a	5240	Ant1	5460	-58.11	2.92	0.24	40.28	Average	54	Pass
NVNT	n20	5180	Ant1	4500	-49.44	2.92	-	48.71	Peak	68.2	Pass
NVNT	n20	5180	Ant1	4500	-58.53	2.92	0.12	39.74	Average	54	Pass
NVNT	n20	5180	Ant1	5149.6	-42.32	2.92	-	55.83	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5149.6	-52.83	2.92	0.12	45.44	Average	54	Pass
NVNT	n20	5180	Ant1	5150	-36.7	2.92	-	61.45	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5150	-53.32	2.92	0.12	44.95	Average	54	Pass
NVNT	n20	5240	Ant1	5350	-50.22	2.92	-	47.93	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5350	-57.31	2.92	0.12	40.96	Average	54	Pass
NVNT	n20	5240	Ant1	5350.56	-47.07	2.92	-	51.08	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5352	-56.93	2.92	0.12	41.34	Average	54	Pass
NVNT	n20	5240	Ant1	5460	-51.18	2.92	-	46.97	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5460	-57.97	2.92	0.12	40.3	Average	54	Pass
NVNT	n40	5190	Ant1	4500	-50.34	2.92	-	47.81	Peak	68.2	Pass
NVNT	n40	5190	Ant1	4500	-58.06	2.92	0.12	40.21	Average	54	Pass
NVNT	n40	5190	Ant1	5149.7	-38.97	2.92	-	59.18	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5149.7	-51.56	2.92	0.12	46.71	Average	54	Pass
NVNT	n40	5190	Ant1	5150	-38.97	2.92	-	59.18	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5150	-51.56	2.92	0.12	46.71	Average	54	Pass
NVNT	n40	5230	Ant1	5350	-50.28	2.92	-	47.87	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5350	-57.1	2.92	0.12	41.17	Average	54	Pass
NVNT	n40	5230	Ant1	5379.81	-47	2.92	-	51.15	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5421.12	-56.88	2.92	0.12	41.39	Average	54	Pass
NVNT	n40	5230	Ant1	5460	-52.13	2.92	-	46.02	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5460	-58.01	2.92	0.12	40.26	Average	54	Pass
NVNT	ac20	5180	Ant1	4500	-48.76	2.92	-	49.39	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	4500	-58.47	2.92	0.12	39.8	Average	54	Pass

NVNT	ac20	5180	Ant1	5147.5	-40.96	2.92	-	57.19	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	5149.6	-53.83	2.92	0.12	44.44	Average	54	Pass
NVNT	ac20	5180	Ant1	5150	-41.37	2.92	-	56.78	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	5150	-52.94	2.92	0.12	45.33	Average	54	Pass
NVNT	ac20	5240	Ant1	5350	-49.2	2.92	-	48.95	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5350	-57.63	2.92	0.12	40.64	Average	54	Pass
NVNT	ac20	5240	Ant1	5390.4	-47.41	2.92	-	50.74	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5368.8	-56.94	2.92	0.12	41.33	Average	54	Pass
NVNT	ac20	5240	Ant1	5460	-50.76	2.92	-	47.39	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5460	-58.23	2.92	0.12	40.04	Average	54	Pass
NVNT	ac40	5190	Ant1	4500	-50.27	2.92	-	47.88	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	4500	-58.03	2.92	0.12	40.24	Average	54	Pass
NVNT	ac40	5190	Ant1	5148.97	-41.91	2.92	-	56.24	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	5148.24	-53.4	2.92	0.12	44.87	Average	54	Pass
NVNT	ac40	5190	Ant1	5150	-43.08	2.92	-	55.07	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	5150	-53.4	2.92	0.12	44.87	Average	54	Pass
NVNT	ac40	5230	Ant1	5350	-50.21	2.92	-	47.94	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5350	-57.82	2.92	0.12	40.45	Average	54	Pass
NVNT	ac40	5230	Ant1	5383.32	-47.27	2.92	-	50.88	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5405.73	-56.99	2.92	0.12	41.28	Average	54	Pass
NVNT	ac40	5230	Ant1	5460	-50.83	2.92	-	47.32	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5460	-58.13	2.92	0.12	40.14	Average	54	Pass
NVNT	ac80	5210	Ant1	5350	-48.24	2.92	-	49.91	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5350	-57.39	2.92	0.25	41.01	Average	54	Pass
NVNT	ac80	5210	Ant1	5377.83	-46.22	2.92	-	51.93	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5379.15	-56.45	2.92	0.25	41.95	Average	54	Pass
NVNT	ac80	5210	Ant1	5460	-48.38	2.92	-	49.77	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5460	-58.12	2.92	0.25	40.28	Average	54	Pass
NVNT	ac80	5210	Ant1	4500	-50.26	2.92	-	47.89	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	4500	-58.34	2.92	0.25	40.06	Average	54	Pass
NVNT	ac80	5210	Ant1	5146.22	-40.28	2.92	-	57.87	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5143.06	-50.92	2.92	0.25	47.48	Average	54	Pass
NVNT	ac80	5210	Ant1	5150	-42.86	2.92	-	55.29	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5150	-51.51	2.92	0.25	46.89	Average	54	Pass
NVNT	ax20	5180	Ant1	4500	-50.47	2.92	-	47.68	Peak	68.2	Pass
NVNT	ax20	5180	Ant1	4500	-58.72	2.92	0.12	39.55	Average	54	Pass
NVNT	ax20	5180	Ant1	5148.9	-40.97	2.92	-	57.18	Peak	68.2	Pass
NVNT	ax20	5180	Ant1	5148.2	-53.5	2.92	0.12	44.77	Average	54	Pass
NVNT	ax20	5180	Ant1	5150	-40.25	2.92	-	57.9	Peak	68.2	Pass
NVNT	ax20	5180	Ant1	5150	-53.64	2.92	0.12	44.63	Average	54	Pass
NVNT	ax20	5240	Ant1	5350	-50.21	2.92	-	47.94	Peak	68.2	Pass