



Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V05

Report Template Revision Date: 2021-11-03

TEST REPORT

Report No.: CQASZ20251102692E-02
Applicant: Shenzhen guard dragon Electronics Co., LTD
Address of Applicant: Room 302, No.437,Hengkeng Hedong Village, Guancheng CommunityGuanlan Street, Longhua District, Shenzhen,Guanhu Street, Longhua District,Shenzhen, Guangdong,CN(China)
Equipment Under Test (EUT):
Product: Car player
Model No.: 9210F, 9090F, 9071F, F150, TY01, FD01-B, FD01-W, FYT01-W, FYT01-B, FD02-S, FD02-B, VWTR1, FYT02, BME39, BME53, OB01-B, OB01-S, OB01-G, LN01, ADA3, ADA4, JP01, GMC01, 9070F, 9072F
Test Model No.: 9101F
Brand Name: BQCC
FCC ID: 2A4S3-9101F
Standards: 47 CFR Part 15, Subpart C
KDB558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10:2020
Date of Receipt: 2025-11-24
Date of Test: 2025-11-24 to 2026-01-30
Date of Issue: 2026-6-29
Test Result : **PASS***

*In the configuration tested, the EUT complied with the standards specified above

Tested By:

Lewis Zhou

(Lewis Zhou)

Reviewed By:

Timo Lei

(Timo Lei)

Approved By:

Jack Ai

(Jack Ai)



The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20251102692E-02	Rev.01	Initial report	2026-6-29

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15.203	N/A	PASS
AC Power Line Conducted Emission	47 CFR Part 15.207	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
Conducted Peak & Average Output Power	47 CFR Part 15.247	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
6dB Occupied Bandwidth	47 CFR Part 15.247	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
Power Spectral Density	47 CFR Part 15.247	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15.247	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
RF Conducted Spurious Emissions	47 CFR Part 15.247	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
Radiated Spurious Emissions	47 CFR Part 15.209	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15.205/15.209	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	5
4 GENERAL INFORMATION	6
4.1 CLIENT INFORMATION	6
4.2 GENERAL DESCRIPTION OF EUT	6
4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	6
4.4 TEST ENVIRONMENT AND MODE	9
4.5 DESCRIPTION OF SUPPORT UNITS	13
4.6 TEST LOCATION	13
4.7 TEST FACILITY	13
4.8 TEST CONFIGURATION	13
4.9 STATEMENT OF THE MEASUREMENT UNCERTAINTY	14
4.10 DEVIATION FROM STANDARDS	14
4.11 ABNORMALITIES FROM STANDARD CONDITIONS	14
4.12 OTHER INFORMATION REQUESTED BY THE CUSTOMER	14
4.13 EQUIPMENT LIST	15
5 TEST RESULTS AND MEASUREMENT DATA	16
5.1 ANTENNA REQUIREMENT	16
5.2 CONDUCTED PEAK & AVERAGE OUTPUT POWER	17
<i>Test Result</i>	<i>18</i>
<i>Note: Duty cycle correction factor details please see section 4.4.</i>	<i>18</i>
<i>When Duty cycle >98%, D.C.F is not required.</i>	<i>18</i>
<i>Test Graphs</i>	<i>19</i>
5.3 99% OCCUPIED BANDWIDTH	24
<i>Test Result</i>	<i>25</i>
<i>Test Graphs</i>	<i>26</i>
5.4 6DB OCCUPIED BANDWIDTH	31
<i>Test Result</i>	<i>32</i>
<i>Test Graphs</i>	<i>33</i>
5.5 POWER SPECTRAL DENSITY	38
<i>Test Result</i>	<i>39</i>
<i>Test Graphs</i>	<i>40</i>
5.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS	45
<i>Test Result</i>	<i>46</i>
5.6.1 <i>Test Graphs</i>	<i>47</i>
5.7 RF CONDUCTED SPURIOUS EMISSIONS	51
<i>Test Result</i>	<i>52</i>
<i>Test Graphs</i>	<i>54</i>
5.8 RADIATED SPURIOUS EMISSIONS	69
5.8.1 <i>Radiated emission below 1GHz</i>	<i>72</i>
5.8.2 <i>Transmitter emission above 1GHz</i>	<i>108</i>
5.9 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	116
6 PHOTOGRAPHS - EUT TEST SETUP	122
6.1 RADIATED SPURIOUS EMISSION	122
6.2 RF CONDUCTED MEASUREMENT	124
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	125

4 General Information

4.1 Client Information

Applicant:	Shenzhen guard dragon Electronics Co., LTD
Address of Applicant:	Room 302, No.437,Hengkeng Hedong Village, Guancheng CommunityGuanlan Street, Longhua District, Shenzhen,Guanhu Street, Longhua District, Shenzhen,Guangdong,CN(China)
Manufacturer:	Shenzhen guard dragon Electronics Co., LTD
Address of Manufacturer:	Room 302, No.437,Hengkeng Hedong Village, Guancheng CommunityGuanlan Street, Longhua District, Shenzhen,Guanhu Street, Longhua District, Shenzhen,Guangdong,CN(China)
Factory:	Shenzhen guard dragon Electronics Co., LTD
Address of Factory:	Room 302, No.437,Hengkeng Hedong Village, Guancheng CommunityGuanlan Street, Longhua District, Shenzhen,Guanhu Street, Longhua District, Shenzhen,Guangdong,CN(China)

4.2 General Description of EUT

Product Name:	Car player
Model No.:	9210F, 9090F, 9071F, F150, TY01, FD01-B, FD01-W, FYT01-W, FYT01-B, FD02-S, FD02-B, VWTR1, FYT02, BME39, BME53, OB01-B, OB01-S, OB01-G, LN01, ADA3, ADA4, JP01, GMC01, 9070F, 9072F
Test Model No.:	9101F
Trade Mark:	BQCC
Software Version:	V1.0
Hardware Version:	V1.0
Power Supply:	DC 12V
EUT Supports Radios application:	BT: 2402-2480MHz 2.4GHz: Wi-Fi: 802.11b/g/n(HT20): 2412MHz~2462MHz; 802.11n(HT40): 2422MHz~2452MHz
Simultaneous Transmission	☐ Simultaneous TX is supported and evaluated in this report. ☒ Simultaneous TX is not supported.

4.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g : 6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps IEEE for 802.11n(HT20) :

	6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps IEEE for 802.11n(HT40) : 13.5Mbps/27Mbps/40.5Mbps/54Mbps/81Mbps/108Mbps/121.5Mbps/135Mbps
Product Type:	☒ Mobile ☐ Portable ☒ Fix Location
Test Software of EUT:	Pandora_R22.20.1701
Antenna Type:	Copper wire antenna
Antenna Gain:	-0.58dBi

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Operation Frequency each of channel(802.11n HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	6	2437MHz	9	2452MHz		
4	2427MHz	7	2442MHz				
5	2432MHz	8	2447MHz				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

For 802.11n (HT40):


Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz

Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

4.4 Test Environment and Mode

Operating Environment:	
Radiated Emissions:	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009 mbar
Conducted Emissions:	
Temperature:	25.6 °C
Humidity:	60 % RH
Atmospheric Pressure:	1009 mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.5 °C
Humidity:	52 % RH
Atmospheric Pressure:	1009 mbar
Test mode:	
Transmitting mode:	EUT is set in RF test mode in all supported modulation types, bandwidth and data rate, etc.
EUT Power level:	Class20
Run Software:	

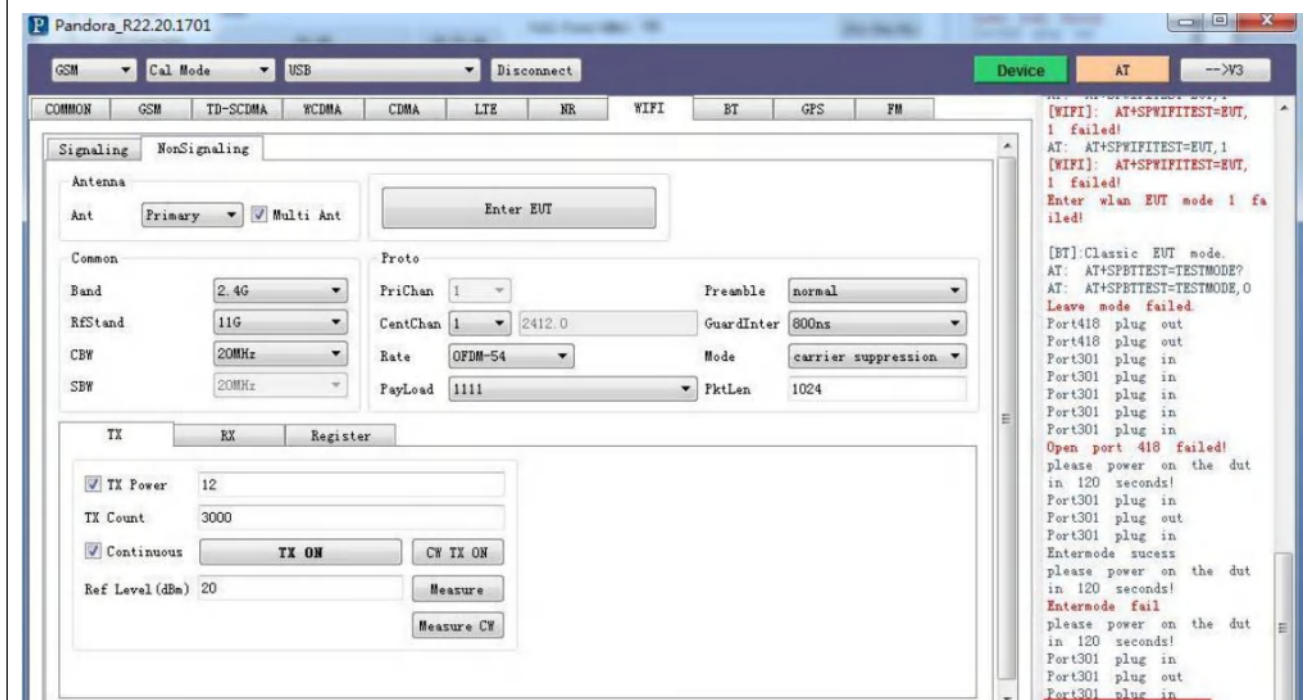


Operated Mode for Worst Duty Cycle:				
Test Mode	On time [Ton] (ms)	Period [Ttotal] ms)	Duty Cycle(%)	Average correction factor(dB)
IEEE802.11b	8.36	8.40	99.52	/
IEEE802.11g	1.38	1.43	96.50	0.15
IEEE802.11n (HT20)	1.29	1.34	96.27	0.17
IEEE802.11n (HT40)	0.64	0.68	94.12	0.26

Remark:


- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;

Test Graph_IEEE802.11b Duty Cycle:

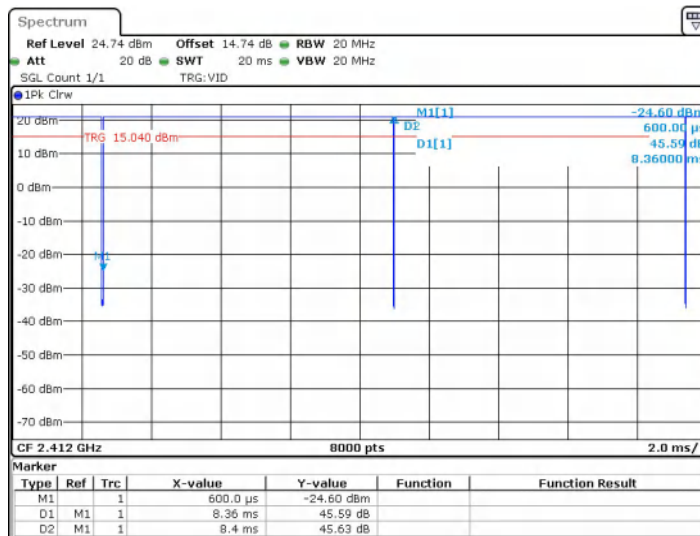


Date: 8 DEC.2025 13:35:28

Test Graph_IEEE802.11g Duty Cycle:

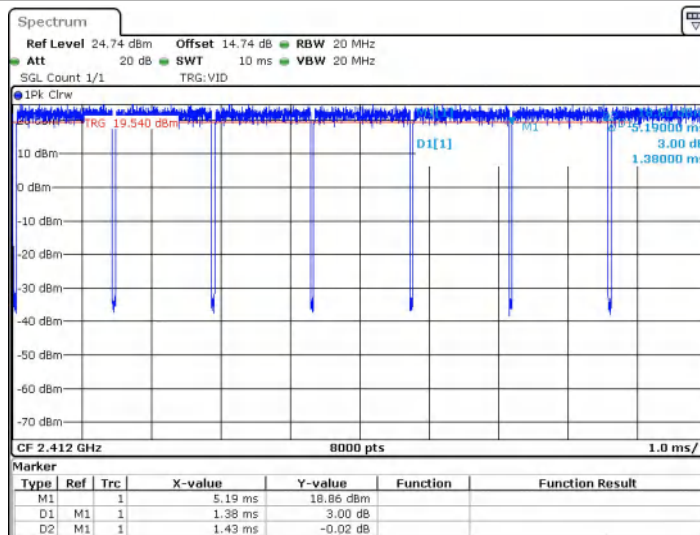


Date: 8 DEC.2025 13:39:42

Test Graph_IEEE802.11 n (HT20) Duty Cycle:

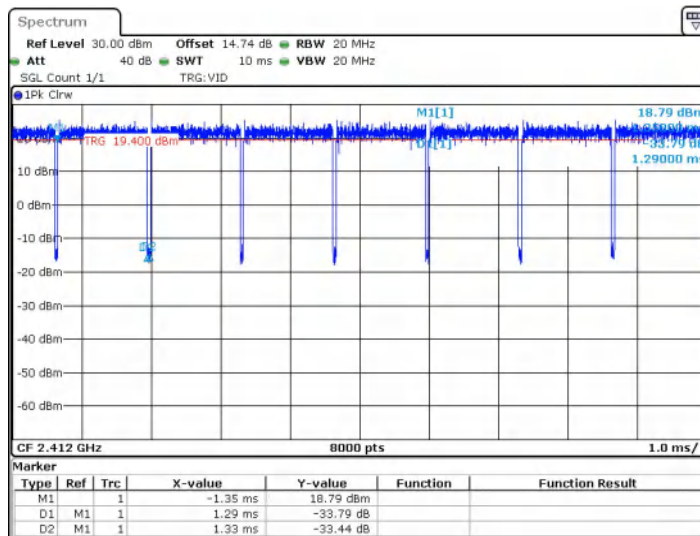

Date: 8 DEC.2025 13:44:14

Test Graph_IEEE802.11 n (HT40) Duty Cycle:

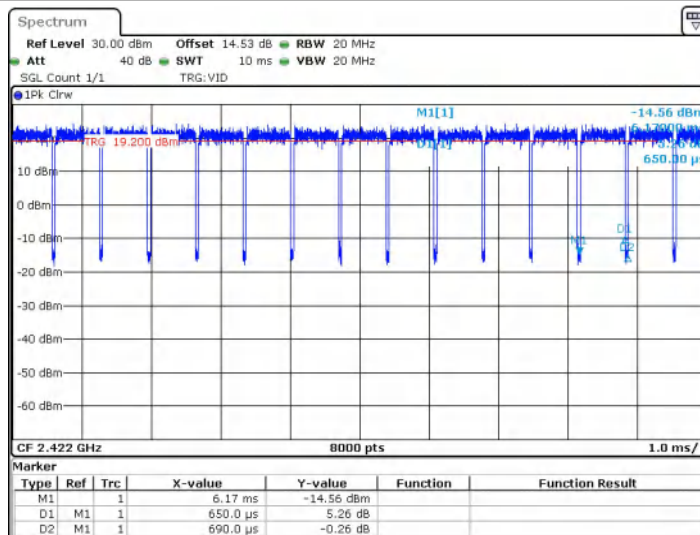

Date: 8 DEC.2025 13:47:53

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:


• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD
102A, 102B, Building 2, Shanghenglang New Industrial Zone, Shanghenglang Community, Dalang Street, Longhua District, Shenzhen, Guangdong, People's Republic of China, 518000

4.8 Test configuration

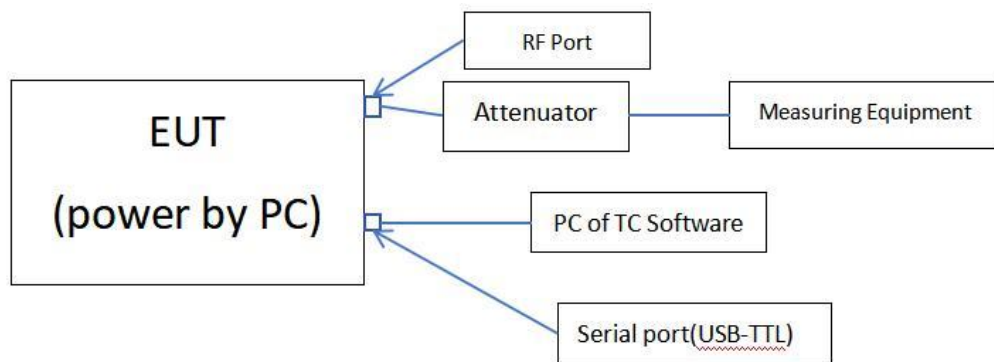

4.9 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.10 Deviation from Standards

None.

4.11 Abnormalities from Standard Conditions

None.

4.12 Other Information Requested by the Customer

None.

4.13 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2025/9/1	2026/8/31
Spectrum analyzer	R&S	FSU26	CQA-038	2025/9/1	2026/8/31
Spectrum analyzer	R&S	FSU40	CQA-075	2025/9/1	2026/8/31
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2025/9/1	2026/8/31
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2025/9/1	2026/8/31
Preamplifier	EMCI	EMC184055SE	CQA-089	2025/9/1	2026/8/31
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2025/9/1	2026/8/31
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2025/9/1	2026/8/31
Antenna Connector	CQA	RFC-01	CQA-080	2025/9/1	2026/8/31
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2025/9/1	2026/8/31
Power meter	R&S	NRVD	CQA-029	2025/9/1	2026/8/31
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2025/9/1	2026/8/31
EMI Test Receiver	R&S	ESR7	CQA-005	2025/9/1	2026/8/31
LISN	R&S	ENV216	CQA-003	2025/9/1	2026/8/31
Coaxial cable	CQA	N/A	CQA-C009	2025/9/1	2026/8/31
DC power	KEYSIGHT	E3631A	CQA-028	2025/9/1	2026/8/31

Test software:


	Manufacturer	Software brand	Software version
Radiated Emissions test software	Tonscend	JS1120-3	Version:8
Conducted Emissions test software	Audix	e3	Version:9
RF Conducted test software	Audix	e3	V3.5.39

5 Test results and Measurement Data

5.1 Antenna Requirement

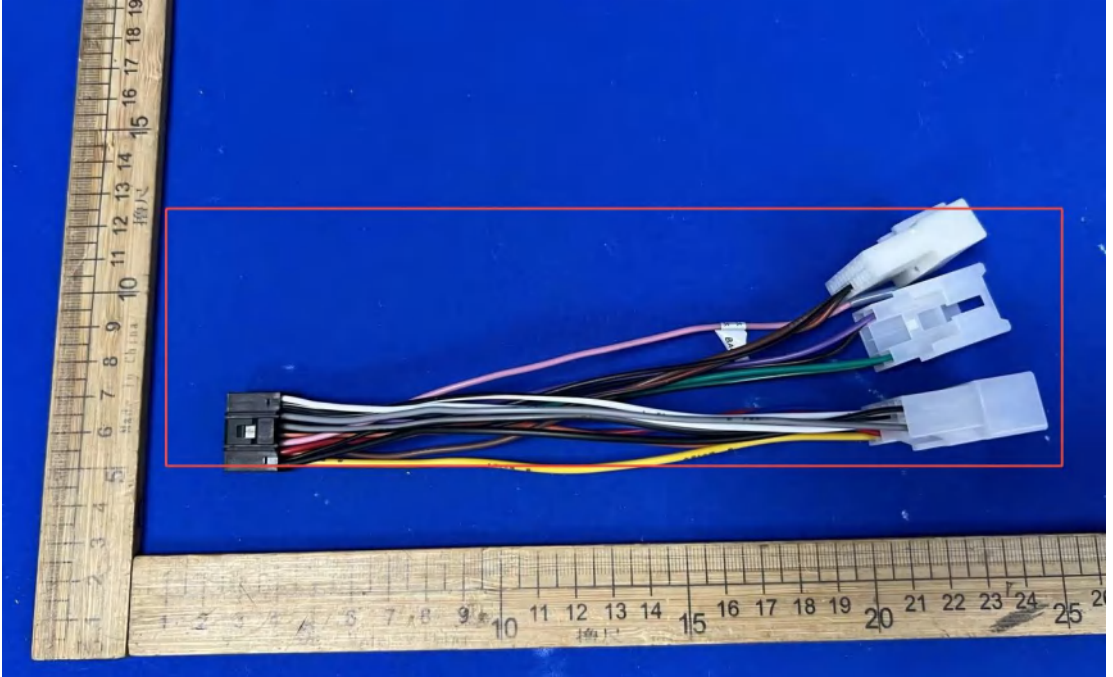Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
	15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
EUT Antenna:	
	The antenna is Copper wire antenna. The connection/connection type between the antenna to the EUT's antenna port is: unique coupling. This is either permanently attachment or a unique coupling that satisfies the requirement.

5.2 Conducted Peak & Average Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2020
Test Setup:	<i>Setup for Power meter measurement method</i>  <i>Setup for Spectrum analyser measurement method</i> 
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass


Test Result


Test Mode	Antenna	Frequency [MHz]	Measured Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	18.55	≤30	PASS
		2437	19.85	≤30	PASS
		2462	20.86	≤30	PASS
11G	Ant1	2412	16.52	≤30	PASS
		2437	17.84	≤30	PASS
		2462	18.62	≤30	PASS
11N20SISO	Ant1	2412	16.37	≤30	PASS
		2437	17.76	≤30	PASS
		2462	18.52	≤30	PASS
11N40SISO	Ant1	2422	16.15	≤30	PASS
		2437	16.78	≤30	PASS
		2452	17.28	≤30	PASS

Note: Duty cycle correction factor details please see section 4.4.


When Duty cycle >98%, D.C.F is not required.

Test Graphs

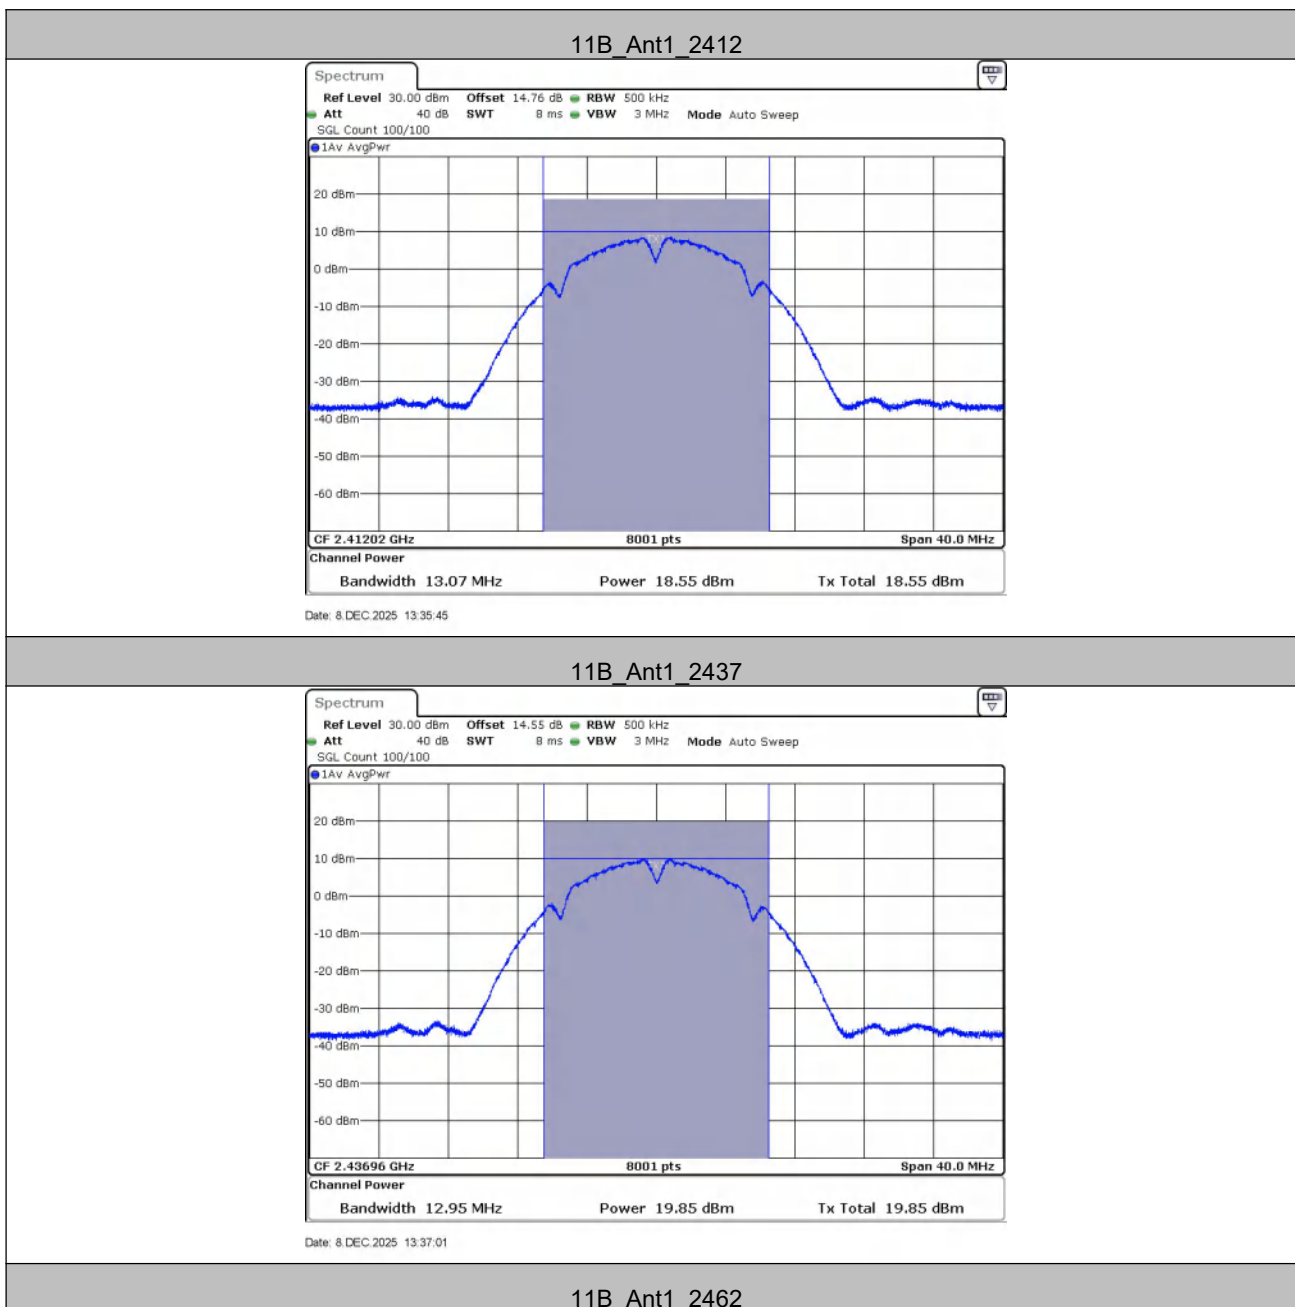


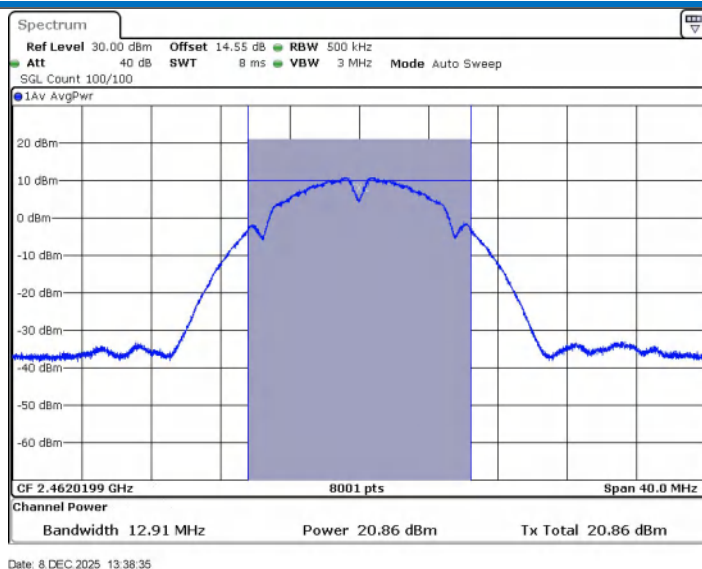


11G_Ant1_2412

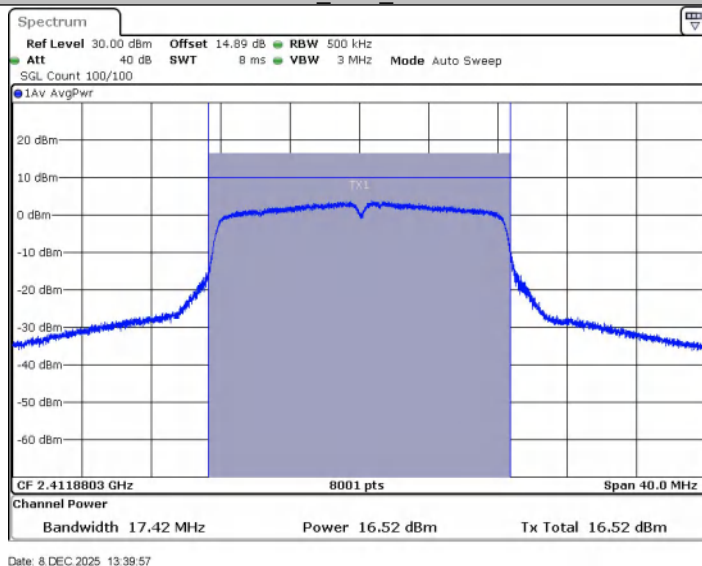

11G_Ant1_2437

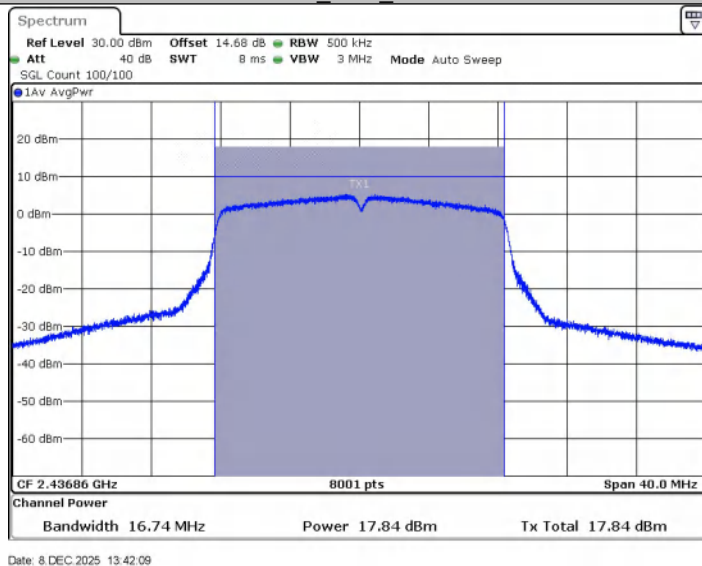


11G_Ant1_2462

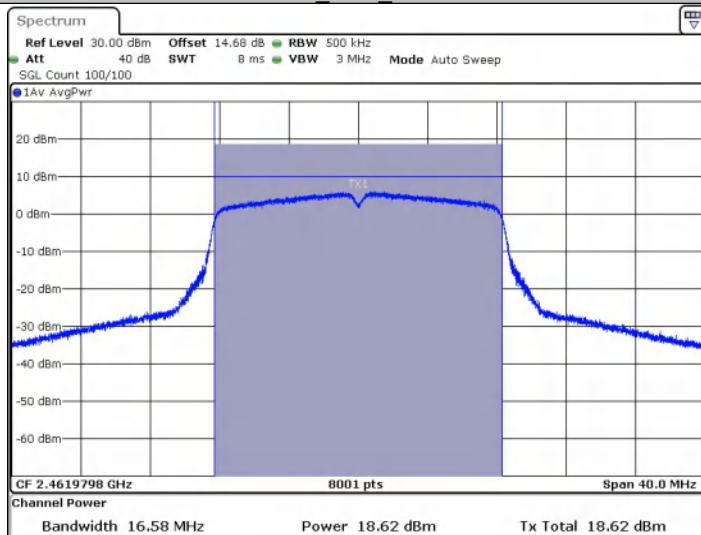


Date: 8 DEC 2025 13:43:12

11N20SISO_Ant1_2412

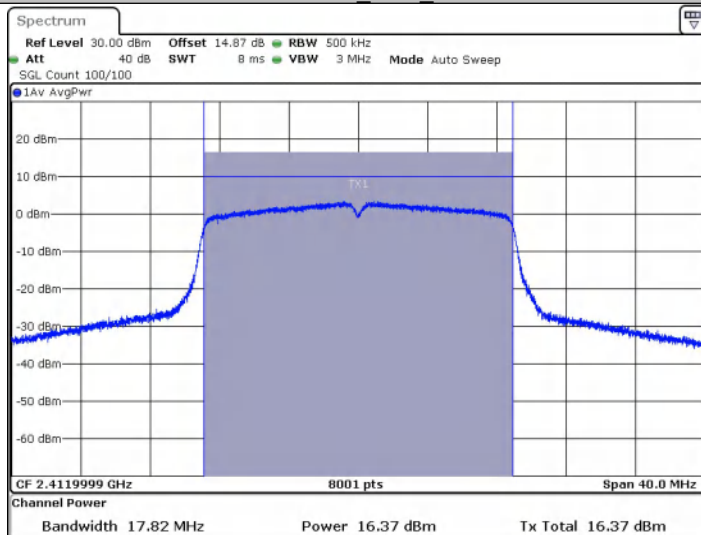


Date: 8 DEC 2025 13:44:29


11N20SISO_Ant1_2437

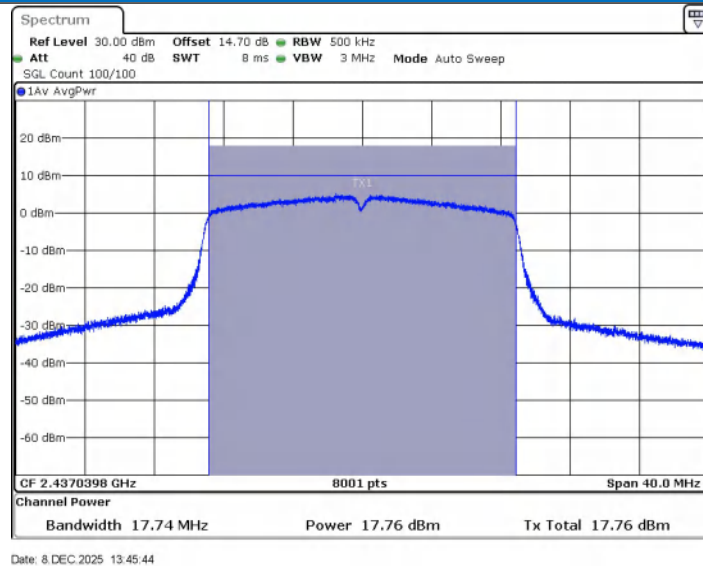


11N20SISO_Ant1_2462

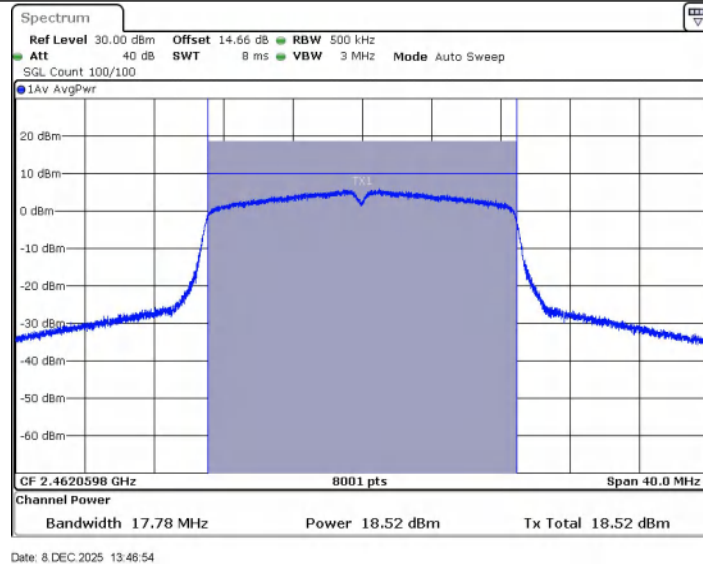

11N40SISO_Ant1_2422

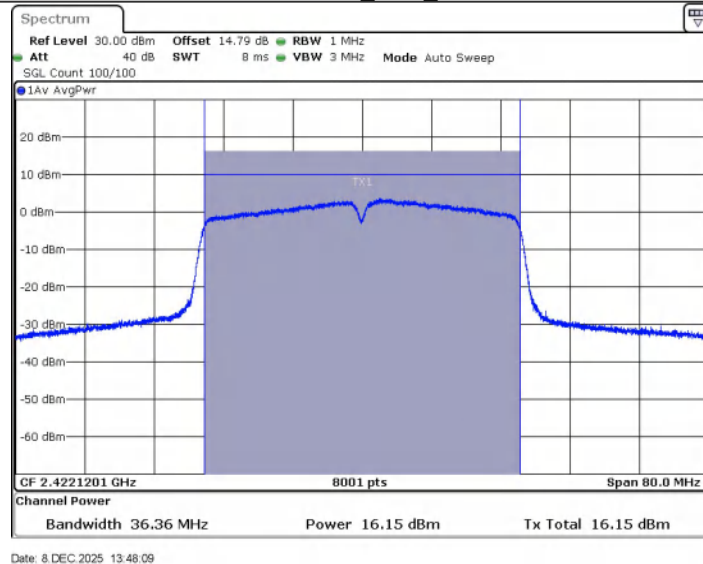


11N40SISO_Ant1_2437

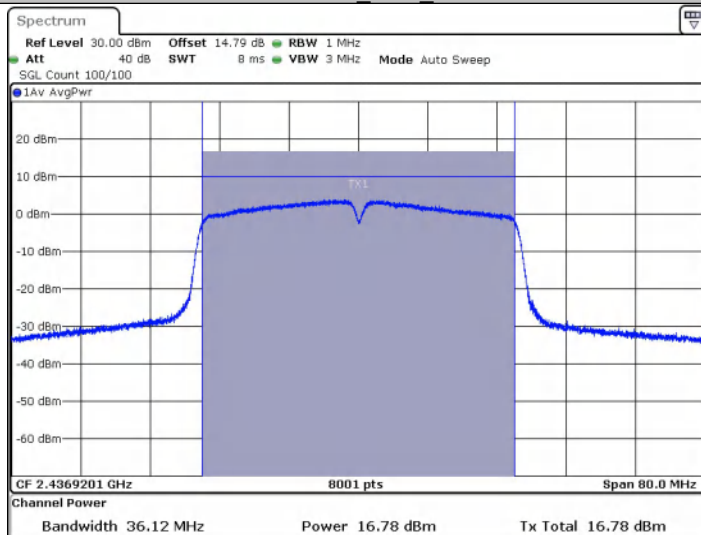


Date: 8 DEC 2025 13:49:29

11N40SISO_Ant1_2452

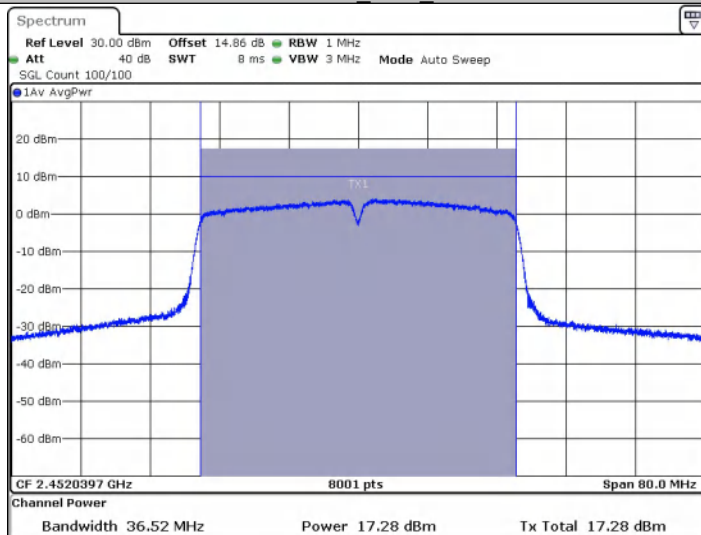

Date: 8 DEC 2025 13:50:40


5.3 99% Occupied Bandwidth


Test Requirement:	47 CFR Part 15C
Test Method:	ANSI C63.10: 2020
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

Test Result


TestMode	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
11B	2412	13.067	2405.4865	2418.5534
	2437	12.947	2430.4865	2443.4336
	2462	12.907	2455.5664	2468.4735
11G	2412	17.423	2403.1688	2420.5914
	2437	16.743	2428.4885	2445.2318
	2462	16.583	2453.6883	2470.2717
11N20SISO	2412	17.822	2403.0889	2420.9111
	2437	17.742	2428.1688	2445.9111
	2462	17.782	2453.1688	2470.9510
11N40SISO	2422	36.364	2403.9381	2440.3017
	2437	36.124	2418.8581	2454.9820
	2452	36.523	2433.7782	2470.3017

Test Graphs

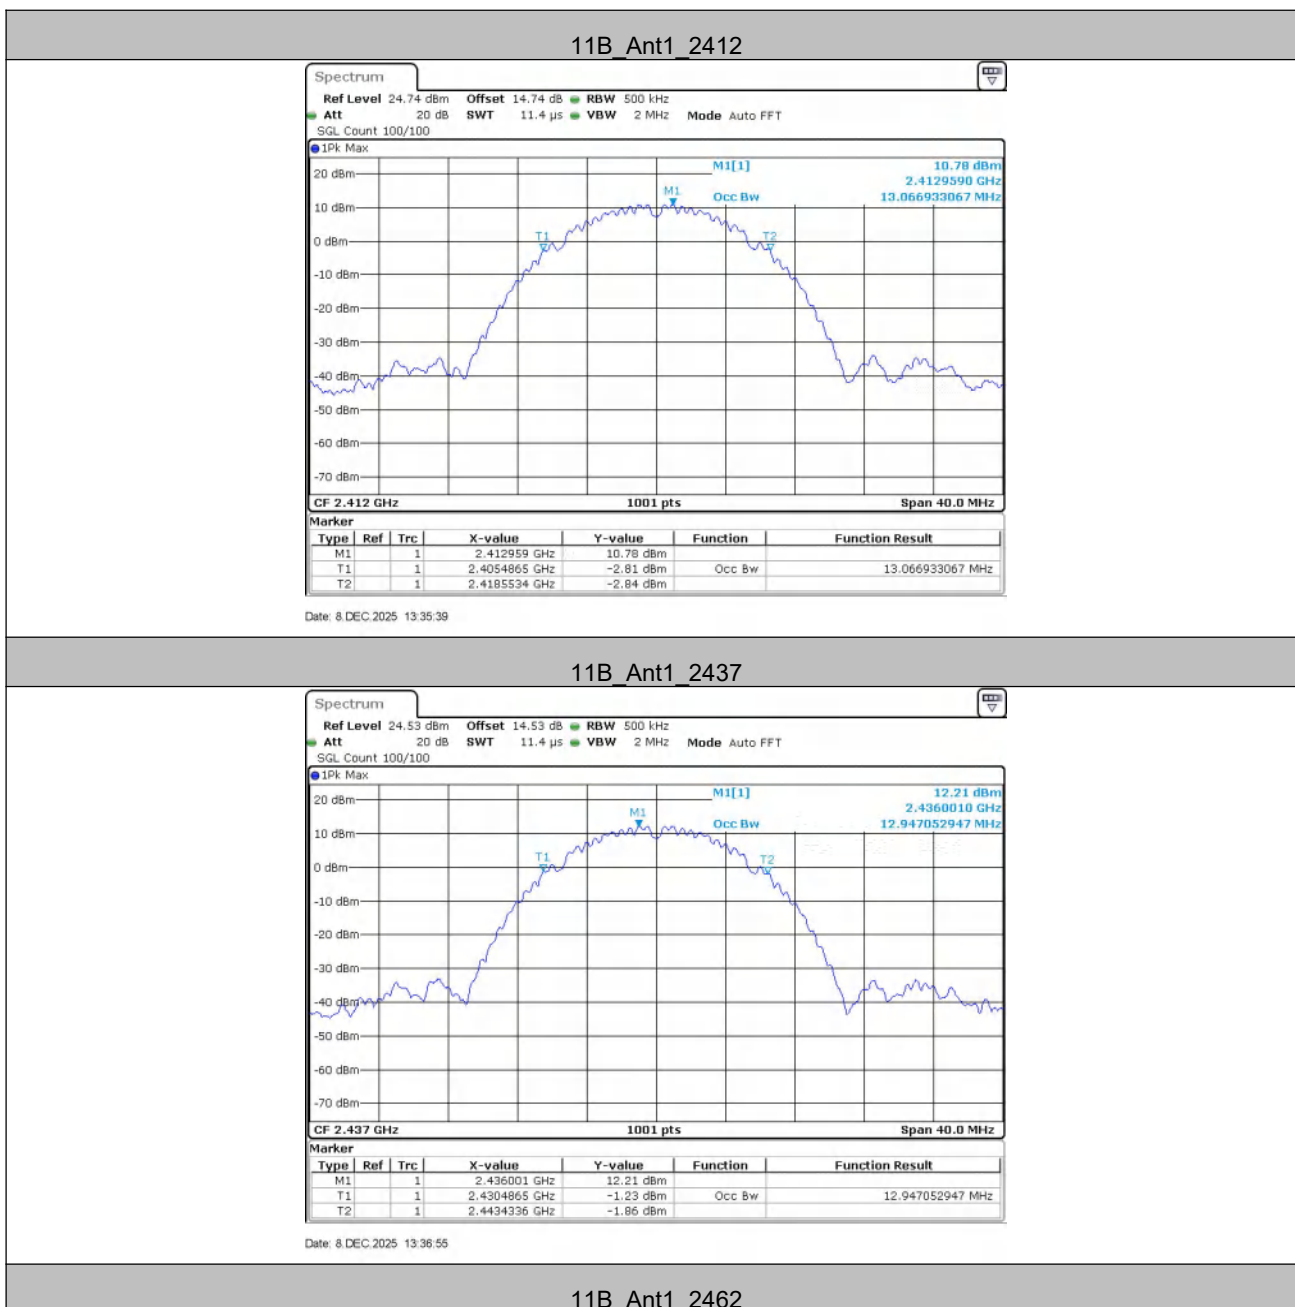


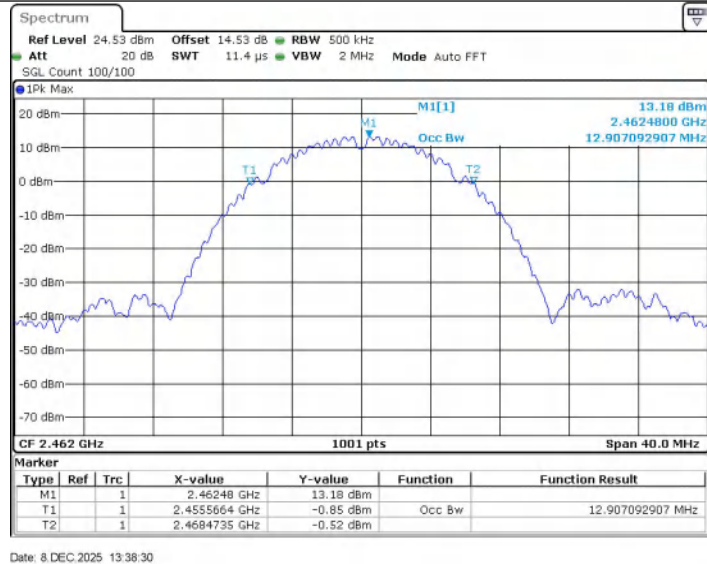


11G_Ant1_2412

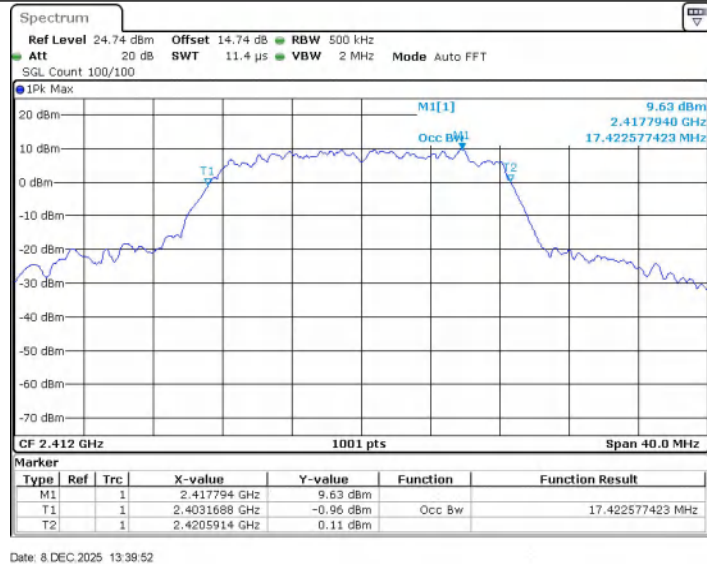

11G_Ant1_2437

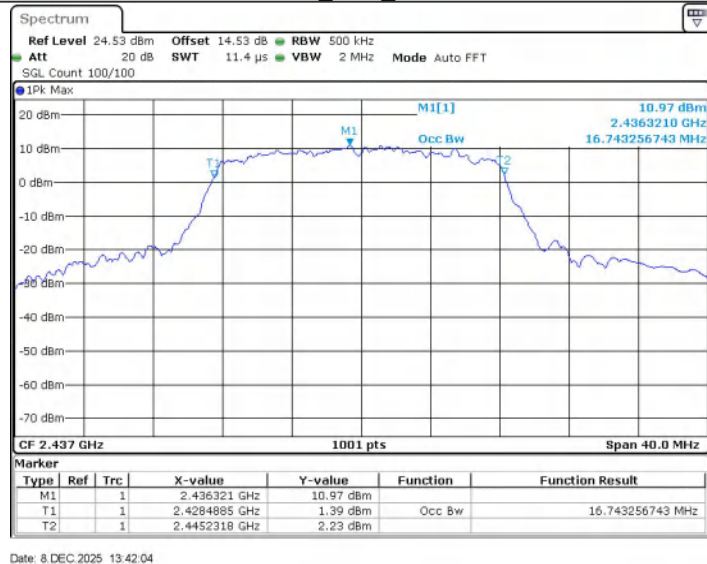


11G_Ant1_2462

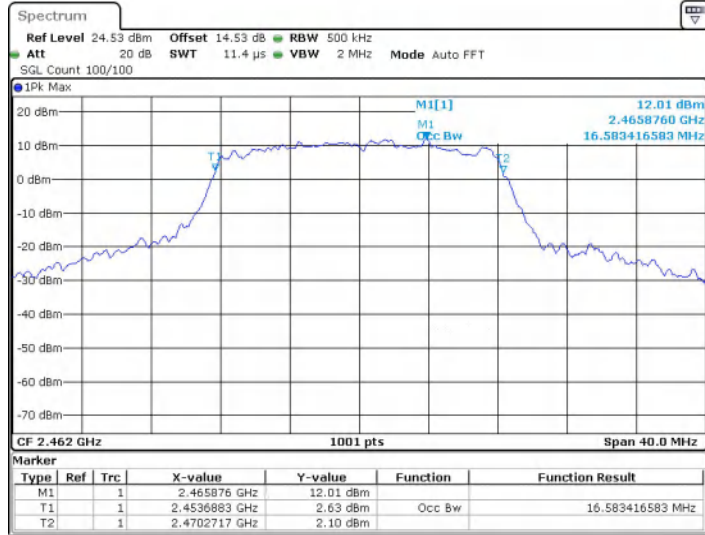


Date: 8 DEC 2025 13:43:07

11N20SISO_Ant1_2412

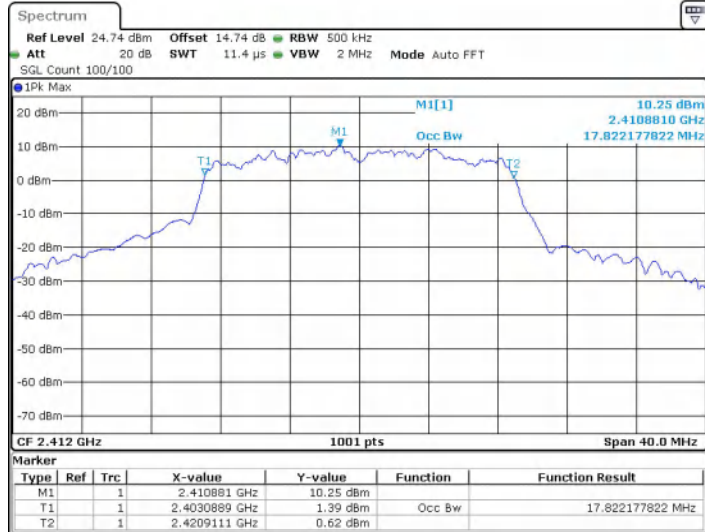


Date: 8 DEC 2025 13:44:24


11N20SISO_Ant1_2437

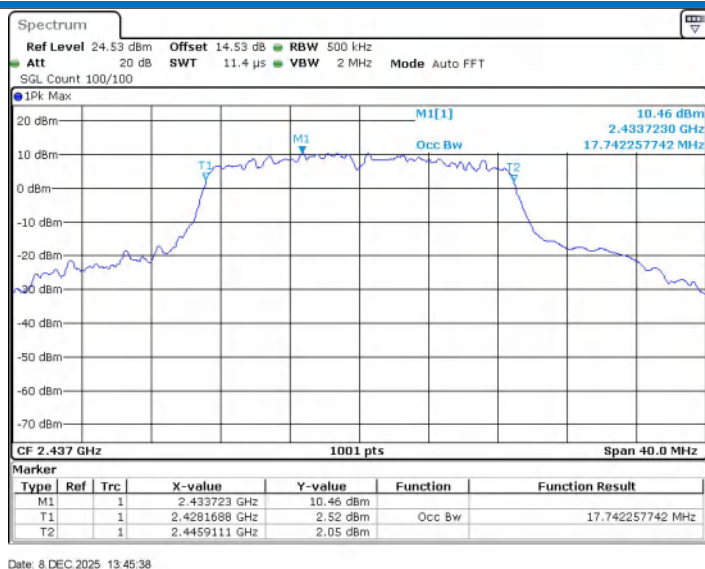


11N20SISO_Ant1_2462

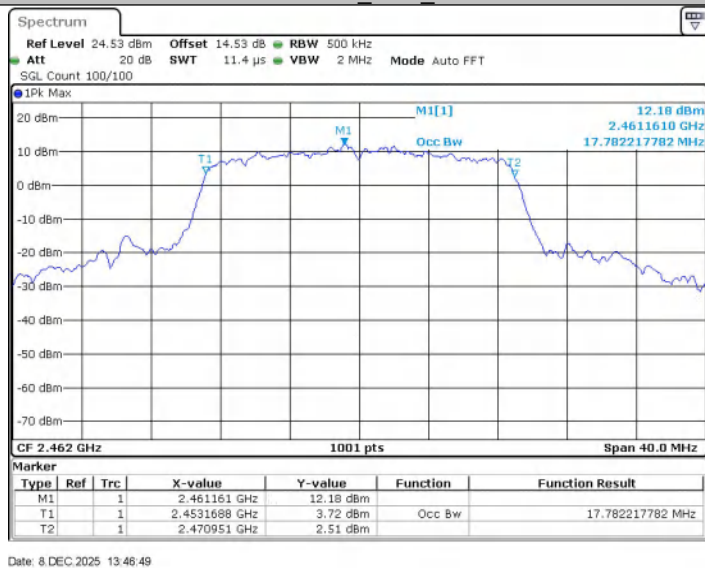


11N40SISO_Ant1_2422

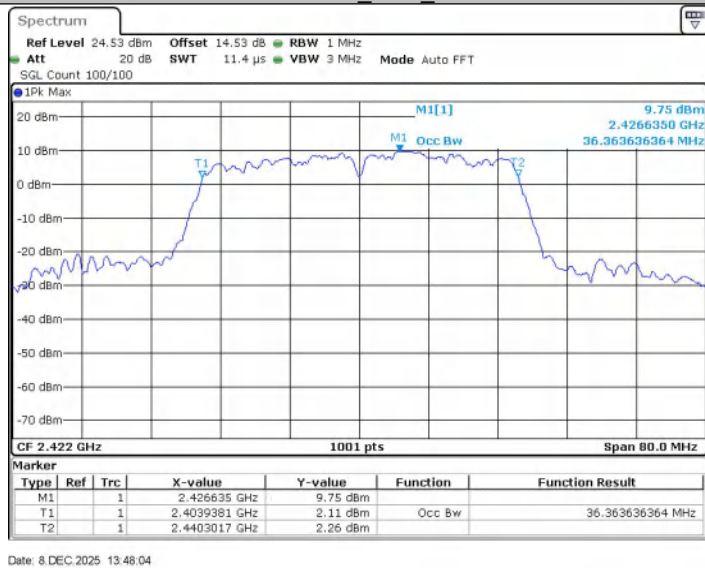


11N40SISO_Ant1_2437

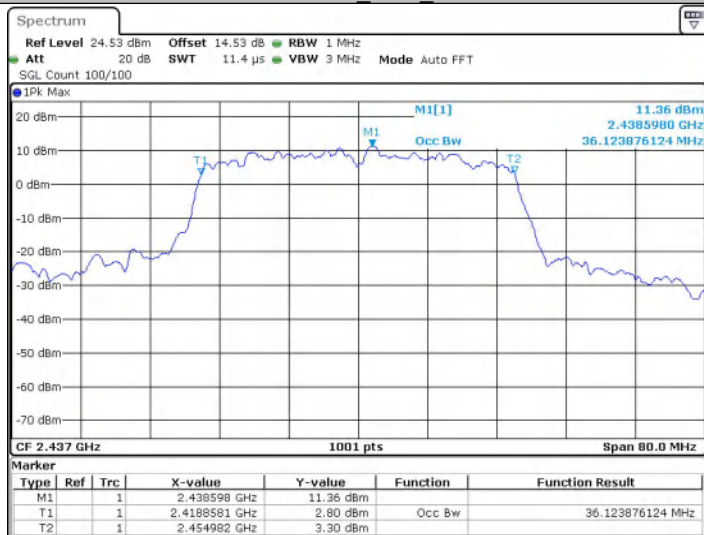

11N40SISO_Ant1_2452

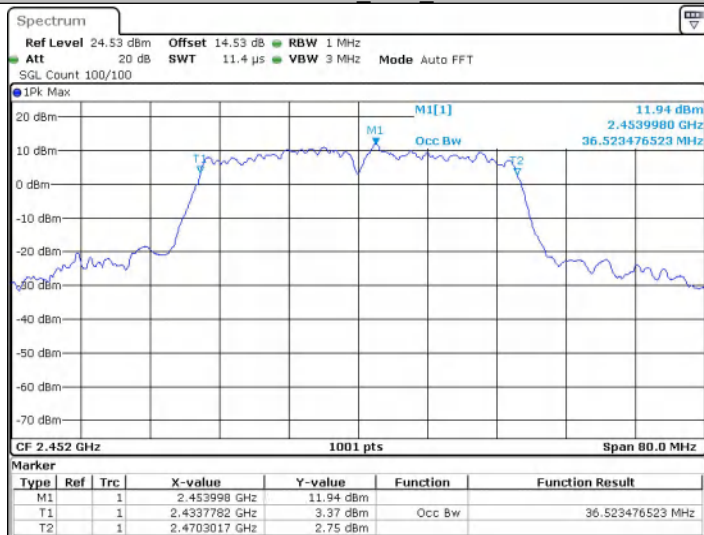

5.4 6dB Occupied Bandwidth


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2020
Test Setup:	 $\text{Offset} = \text{cable loss} + \text{attenuation factor}$
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	$\geq 500 \text{ kHz}$
Test Results:	Pass

Test Result

TestMode	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	2412	8.28	2407.84	2416.12	0.5	PASS
	2437	8.64	2432.44	2441.08	0.5	PASS
	2462	8.28	2457.84	2466.12	0.5	PASS
11G	2412	16.16	2403.88	2420.04	0.5	PASS
	2437	16.12	2428.92	2445.04	0.5	PASS
	2462	15.80	2454.24	2470.04	0.5	PASS
11N20SISO	2412	17.20	2403.52	2420.72	0.5	PASS
	2437	17.44	2428.28	2445.72	0.5	PASS
	2462	17.36	2453.36	2470.72	0.5	PASS
11N40SISO	2422	35.04	2404.72	2439.76	0.5	PASS
	2437	35.60	2419.24	2454.84	0.5	PASS
	2452	36.40	2433.76	2470.16	0.5	PASS


Test Graphs

11B_Ant1_2412

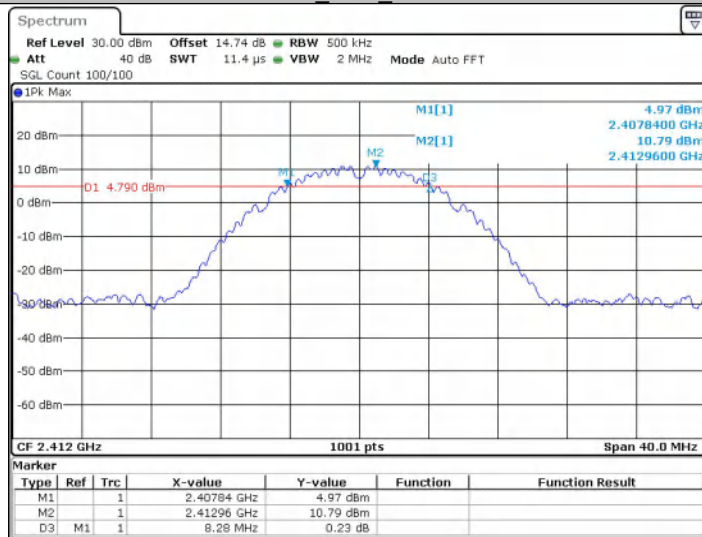


Date: 8 DEC 2025 13:35:35

11B_Ant1_2437

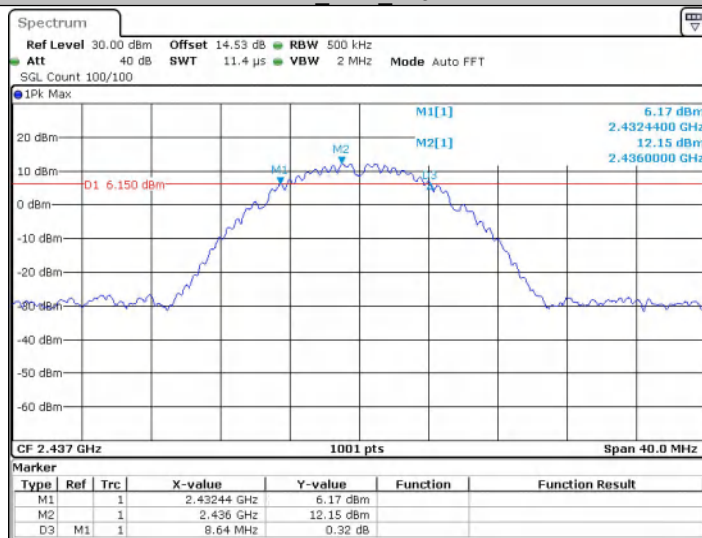


Date: 8 DEC 2025 13:36:51


11B_Ant1_2462

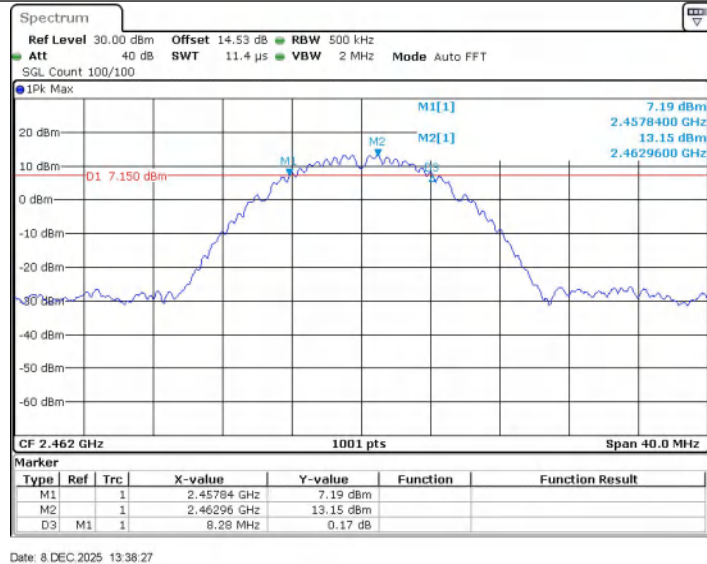


11G_Ant1_2412

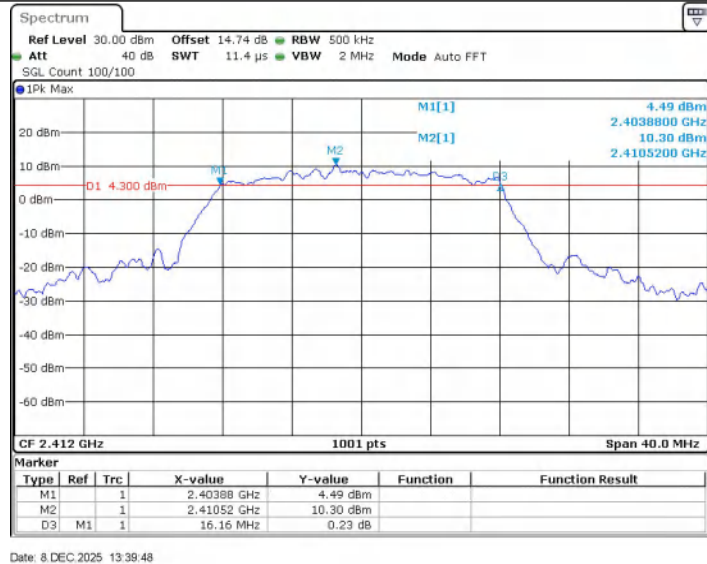

11G_Ant1_2437

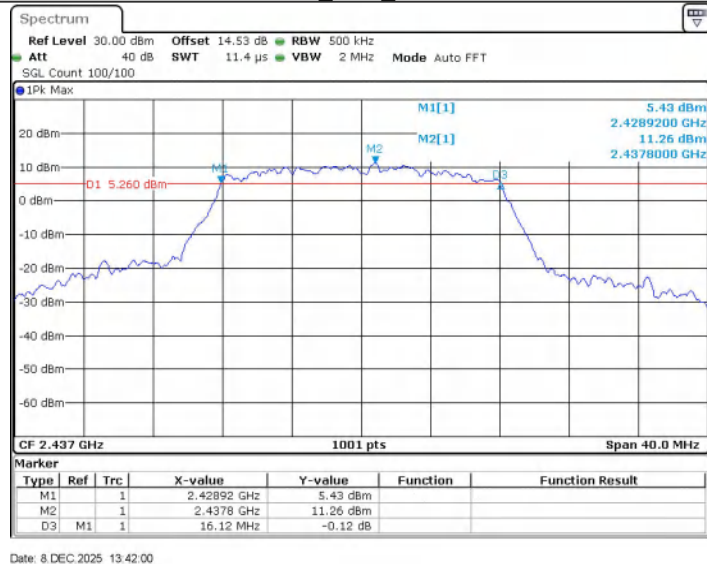


11G_Ant1_2462

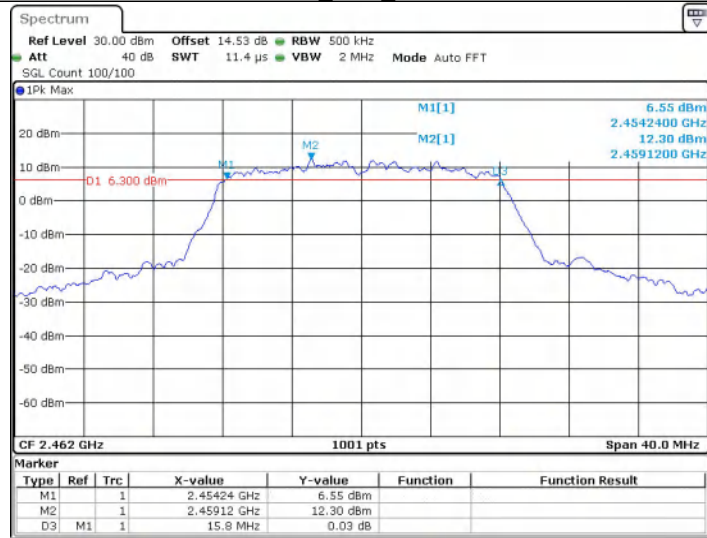


Date: 8 DEC 2025 13:43:03

11N20SISO_Ant1_2412

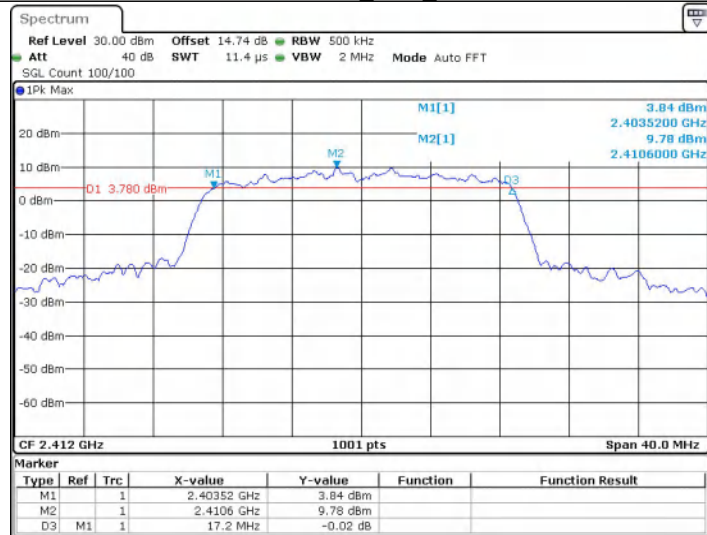


Date: 8 DEC 2025 13:44:20


11N20SISO_Ant1_2437

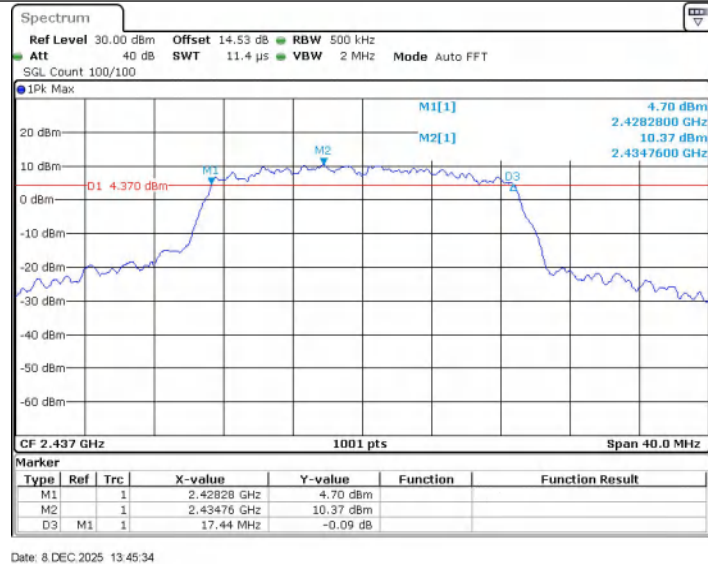


11N20SISO_Ant1_2462

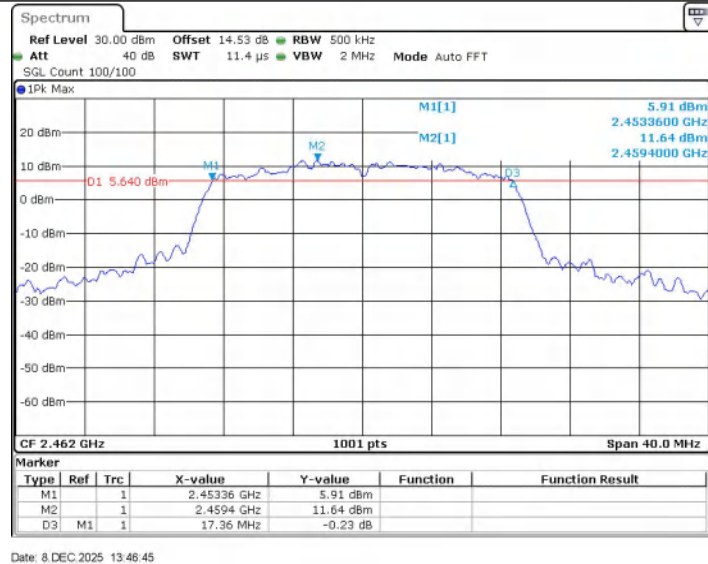


11N40SISO_Ant1_2422

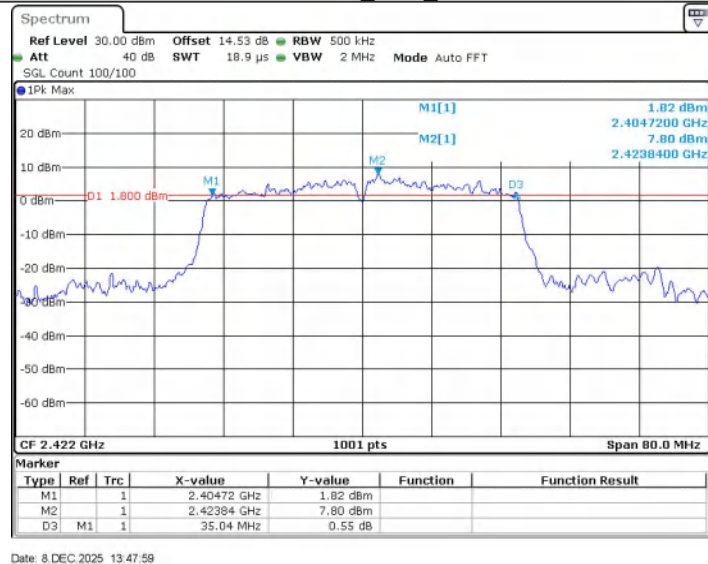



5.5 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2020
Test Setup:	 $\text{Offset} = \text{cable loss} + \text{attenuation factor}$
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	$\leq 8.00 \text{ dBm/3kHz}$
Test Results:	Pass

Test Result


TestMode	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	2412	-12.32	≤8.00	PASS
	2437	-11.28	≤8.00	PASS
	2462	-9.77	≤8.00	PASS
11G	2412	-16.53	≤8.00	PASS
	2437	-14.89	≤8.00	PASS
	2462	-14.44	≤8.00	PASS
11N20SISO	2412	-16.15	≤8.00	PASS
	2437	-15.07	≤8.00	PASS
	2462	-14.19	≤8.00	PASS
11N40SISO	2422	-17.61	≤8.00	PASS
	2437	-16.35	≤8.00	PASS
	2452	-16.61	≤8.00	PASS

Note: Duty cycle correction factor details please see section 4.4.


When Duty cycle >98%, D.C.F is not required.

Test Graphs


11B_Ant1_2412

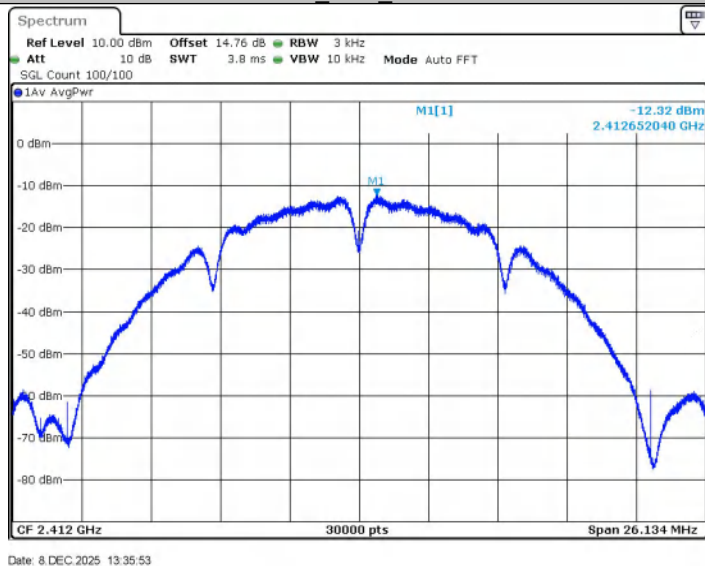


11B_Ant1_2437

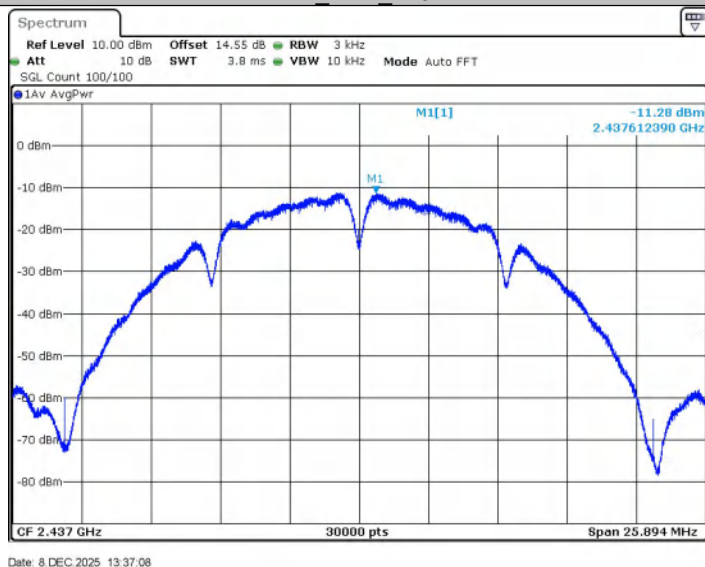


11B_Ant1_2462

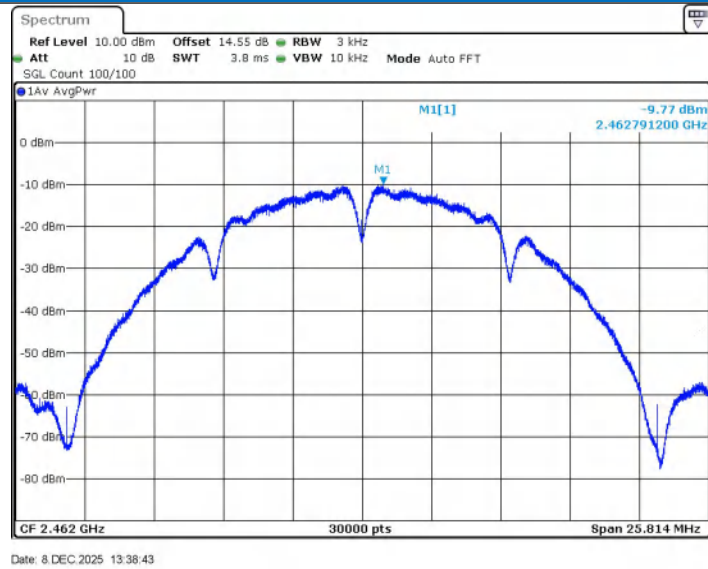


11G_Ant1_2412

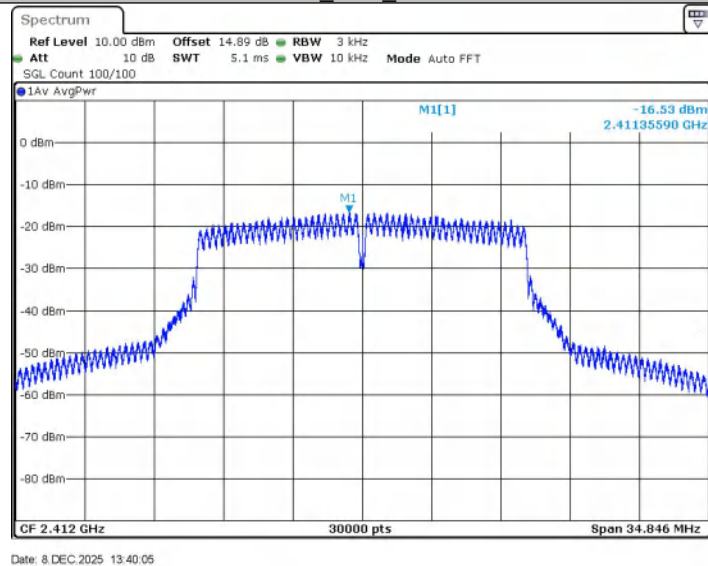

11G_Ant1_2437

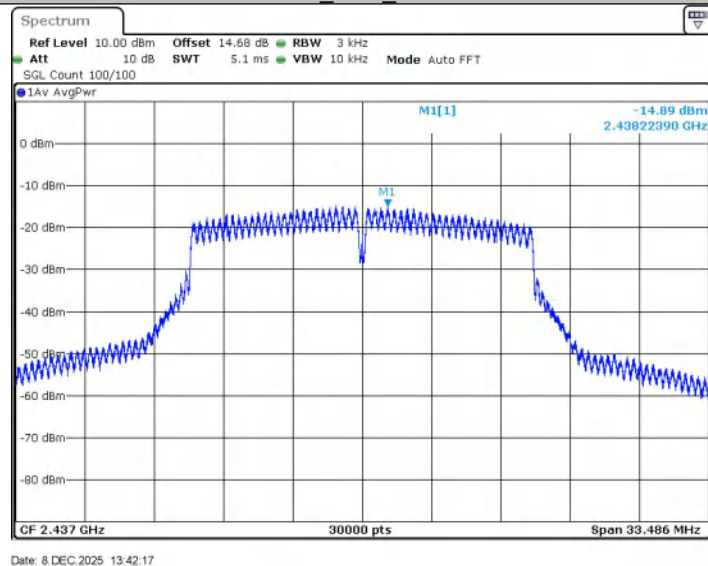


11G_Ant1_2462

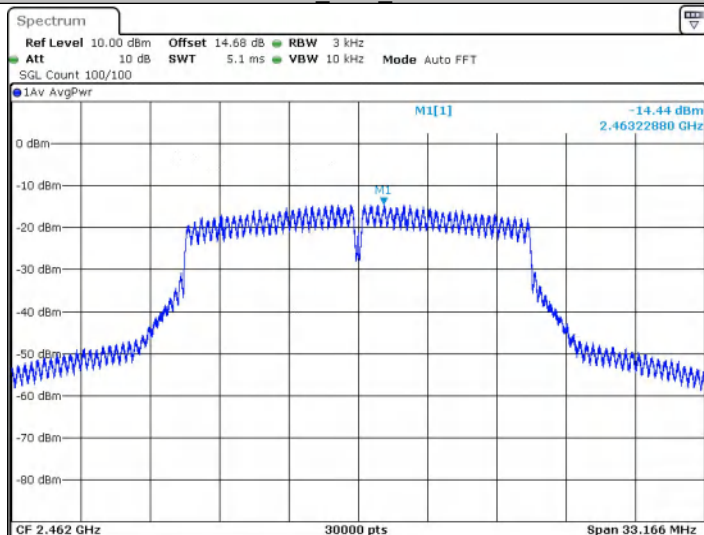


Date: 8 DEC 2025 13:43:19

11N20SISO_Ant1_2412

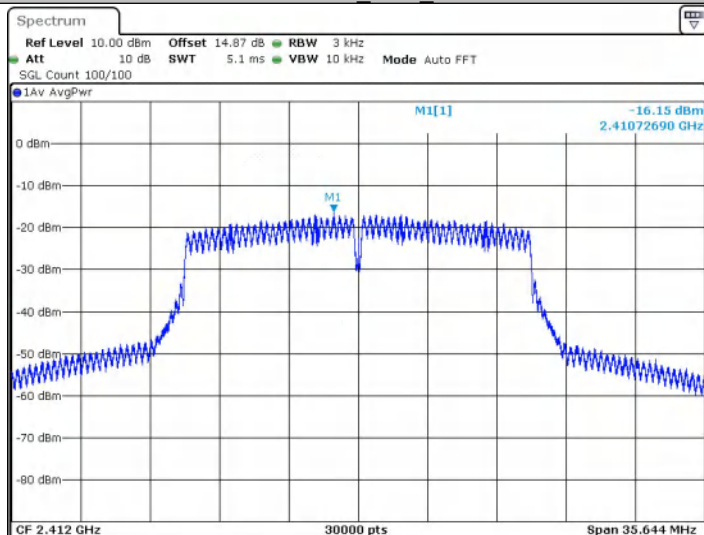


Date: 8 DEC 2025 13:44:37


11N20SISO_Ant1_2437

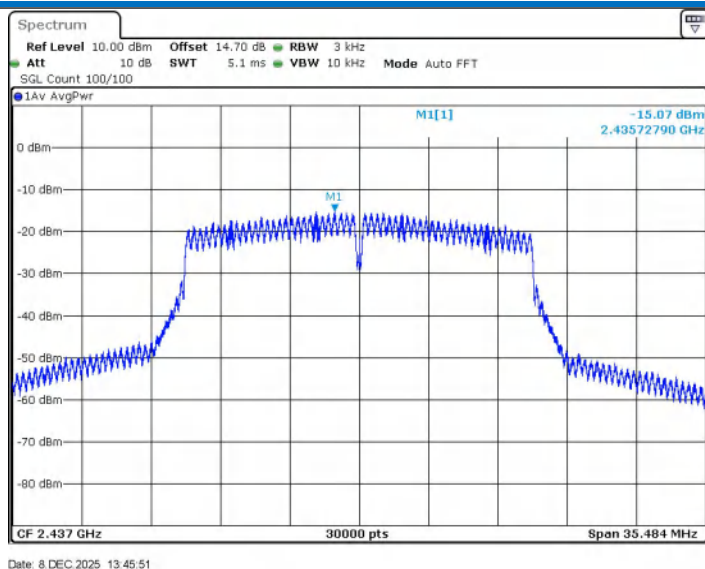


11N20SISO_Ant1_2462

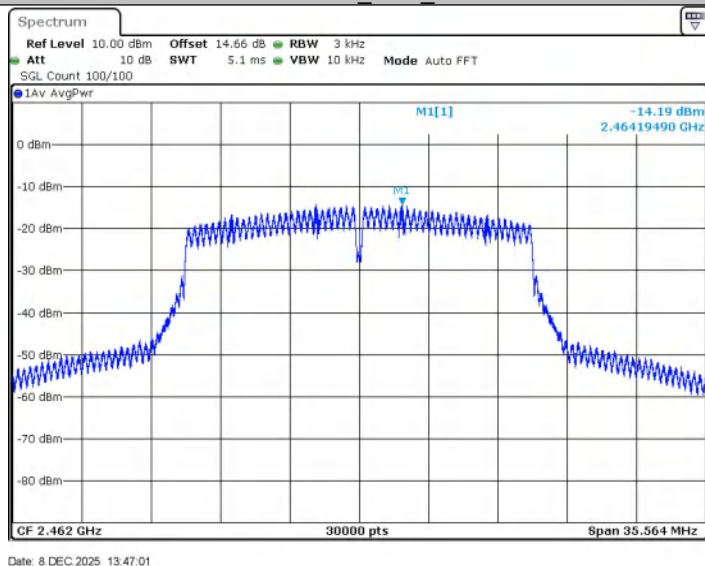

11N40SISO_Ant1_2422

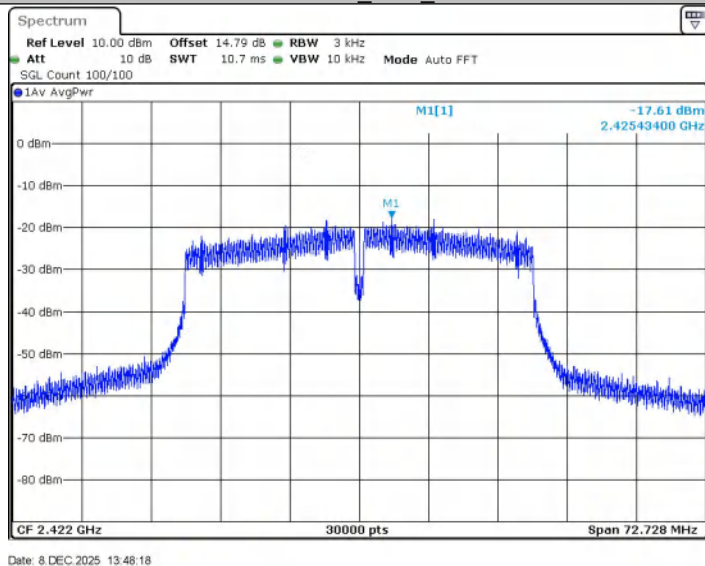


11N40SISO_Ant1_2437

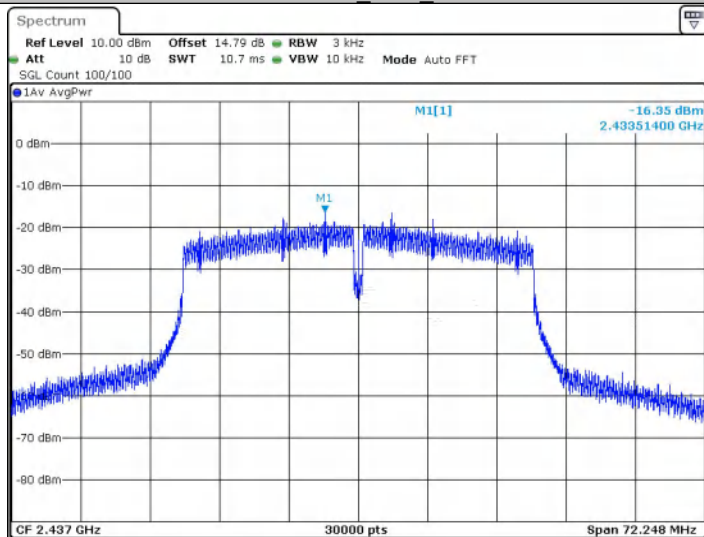


Date: 8 DEC 2025 13:49:39

11N40SISO_Ant1_2452

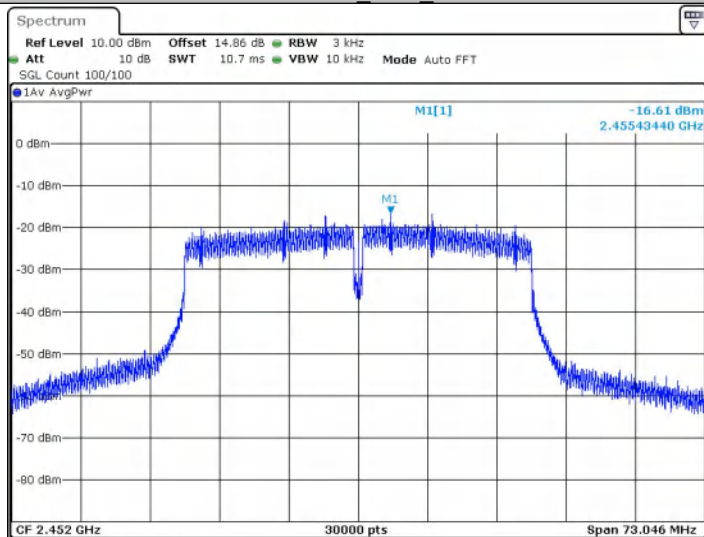

Date: 8 DEC 2025 13:50:49


5.6 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2020
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

Test Result

TestMode	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Low	2412	10.57	-35.6	≤ -19.43	PASS
	High	2462	13.04	-40.91	≤ -16.96	PASS
11G	Low	2412	5.44	-24.44	≤ -24.56	PASS
	High	2462	8.31	-39.72	≤ -21.69	PASS
11N20SISO	Low	2412	6.06	-24.98	≤ -23.94	PASS
	High	2462	8.30	-38.36	≤ -21.7	PASS
11N40SISO	Low	2422	3.38	-27.47	≤ -26.62	PASS
	High	2452	3.85	-30.66	≤ -26.15	PASS

5.6.1 Test Graphs

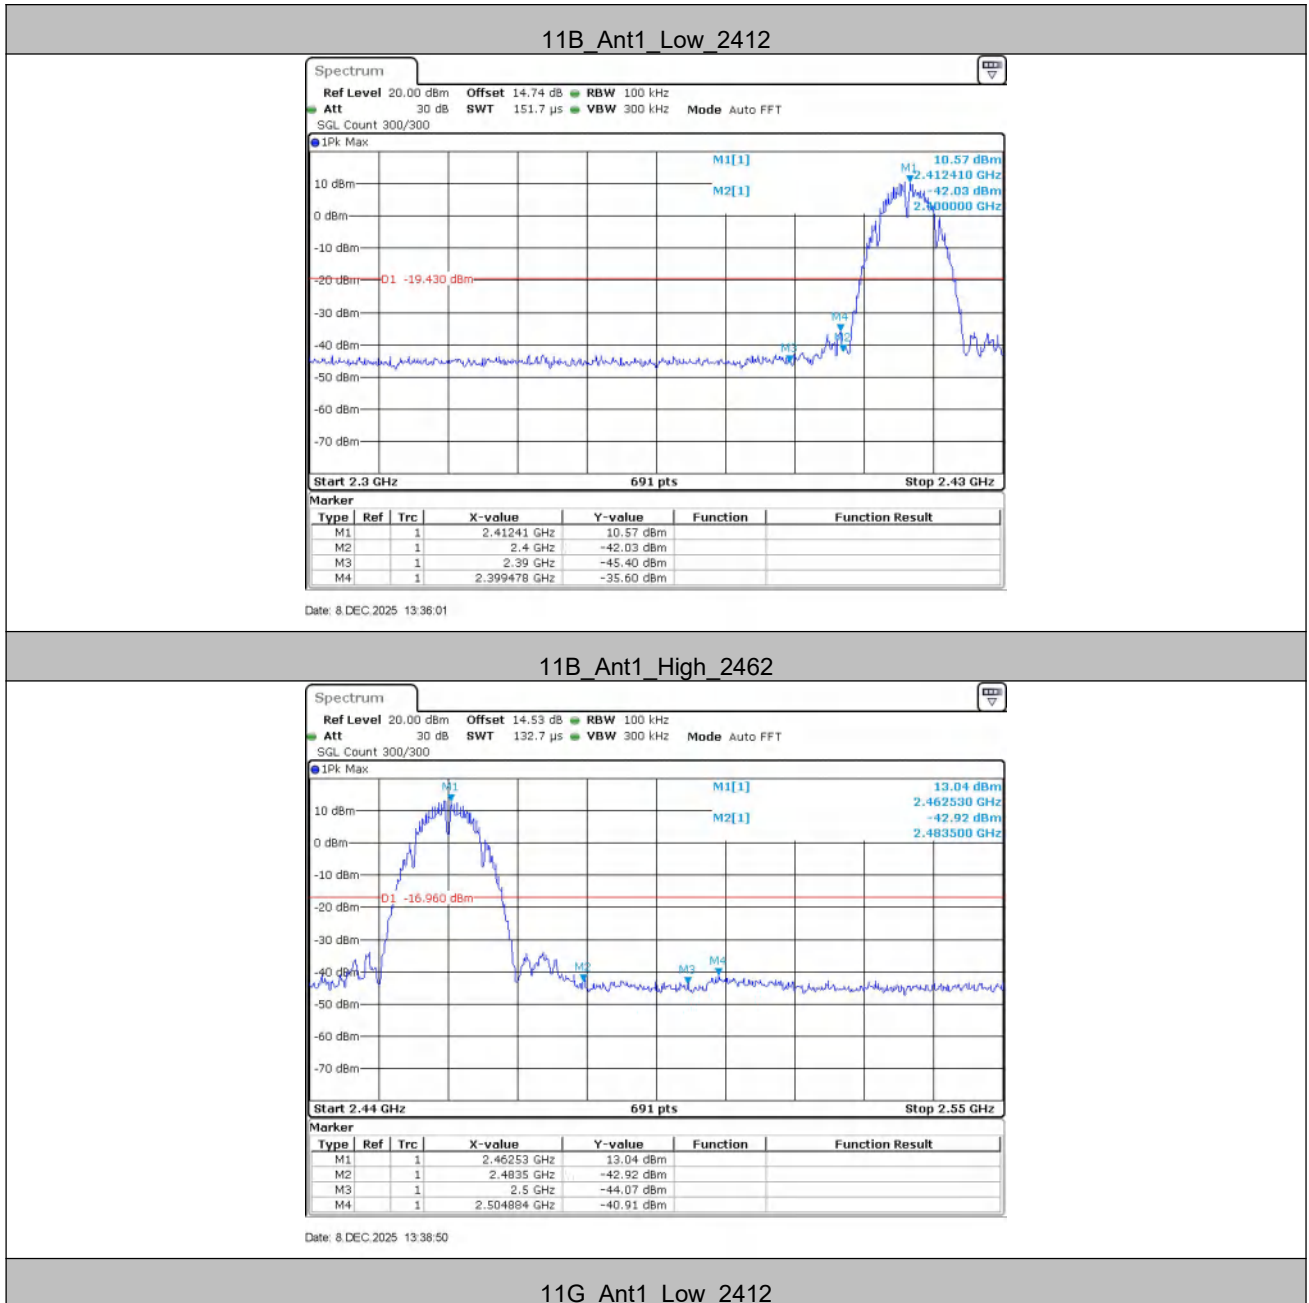



Date: 8 DEC 2025 13:40:13

11G_Ant1_High_2462



Date: 8 DEC 2025 13:43:27

11N20SISO_Ant1_Low_2412



Date: 8 DEC 2025 13:51:53

11N20SISO_Ant1_High_2462



Date: 8 DEC 2025 13:47:09

11N40SISO_Ant1_Low_2422




Date: 8 DEC 2025 13:48:27

11N40SISO_Ant1_High_2452



Date: 8 DEC 2025 13:50:57

5.7 RF Conducted Spurious Emissions


Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2020
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass


Test Result

TestMode	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	Reference	9.60	9.60	---	PASS
		30~1000	9.60	-50.88	≤ -20.4	PASS
		1000~26500	9.60	-40.88	≤ -20.4	PASS
	2437	Reference	8.81	8.81	---	PASS
		30~1000	8.81	-51.59	≤ -21.19	PASS
		1000~26500	8.81	-40.25	≤ -21.19	PASS
	2462	Reference	9.66	9.66	---	PASS
		30~1000	9.66	-51.87	≤ -20.34	PASS
		1000~26500	9.66	-40.29	≤ -20.34	PASS
11G	2412	Reference	2.71	2.71	---	PASS
		30~1000	2.71	-50.09	≤ -27.29	PASS
		1000~26500	2.71	-46.93	≤ -27.29	PASS
	2437	Reference	7.56	7.56	---	PASS
		30~1000	7.56	-51.44	≤ -22.44	PASS
		1000~26500	7.56	-47.82	≤ -22.44	PASS
	2462	Reference	5.13	5.13	---	PASS
		30~1000	5.13	-51.15	≤ -24.87	PASS
		1000~26500	5.13	-47.06	≤ -24.87	PASS
11N20SISO	2412	Reference	2.06	2.06	---	PASS
		30~1000	2.06	-50.84	≤ -27.94	PASS
		1000~26500	2.06	-47.85	≤ -27.94	PASS
	2437	Reference	6.91	6.91	---	PASS
		30~1000	6.91	-51.43	≤ -23.09	PASS
		1000~26500	6.91	-48.34	≤ -23.09	PASS
	2462	Reference	4.60	4.60	---	PASS
		30~1000	4.60	-50.16	≤ -25.4	PASS
		1000~26500	4.60	-47.74	≤ -25.4	PASS
11N40SISO	2422	Reference	-0.19	-0.19	---	PASS
		30~1000	-0.19	-51.15	≤ -30.19	PASS
		1000~26500	-0.19	-47.99	≤ -30.19	PASS
	2437	Reference	0.14	0.14	---	PASS
		30~1000	0.14	-51.09	≤ -29.86	PASS
		1000~26500	0.14	-47.38	≤ -29.86	PASS
	2452	Reference	2.75	2.75	---	PASS


		30~1000	2.75	-51.13	≤ -27.25	PASS
		1000~26500	2.75	-46.81	≤ -27.25	PASS

Test Graphs

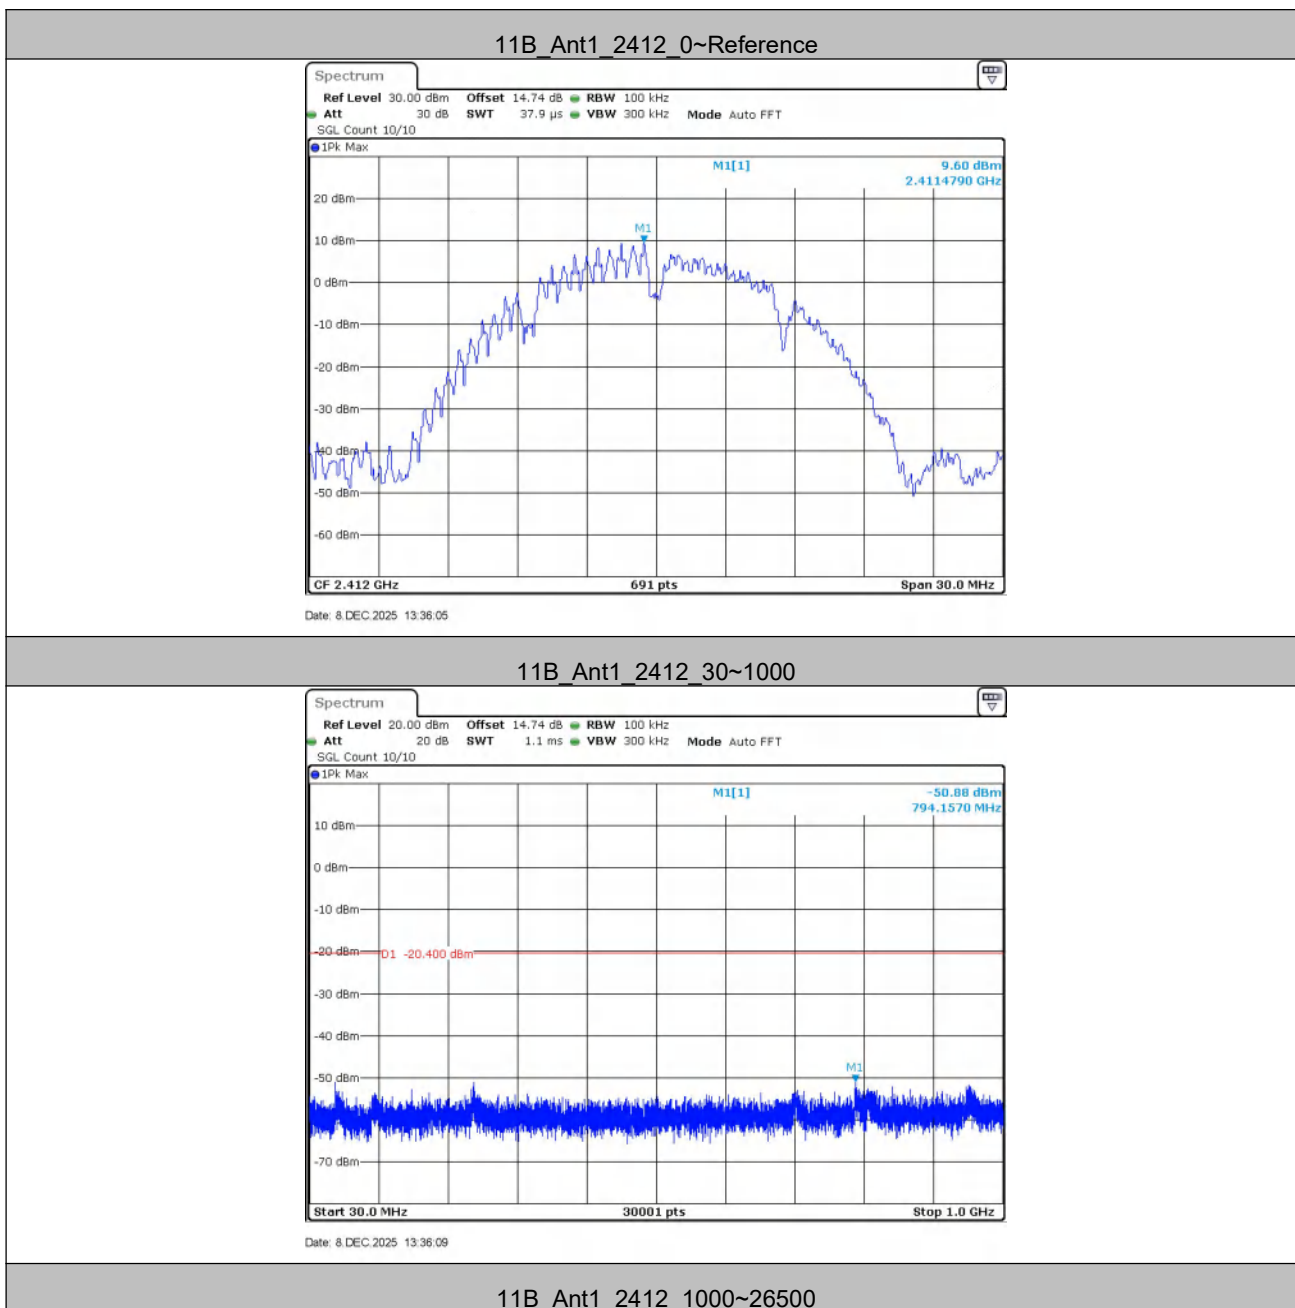


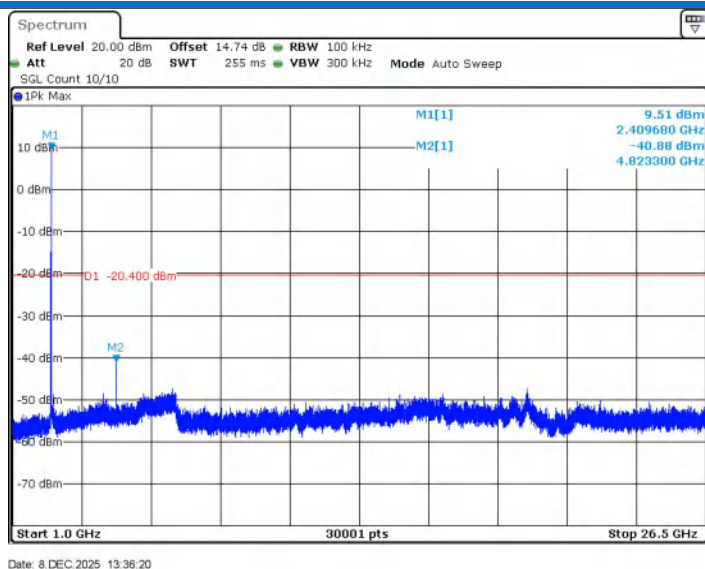


11B_Ant1_2437_0~Reference

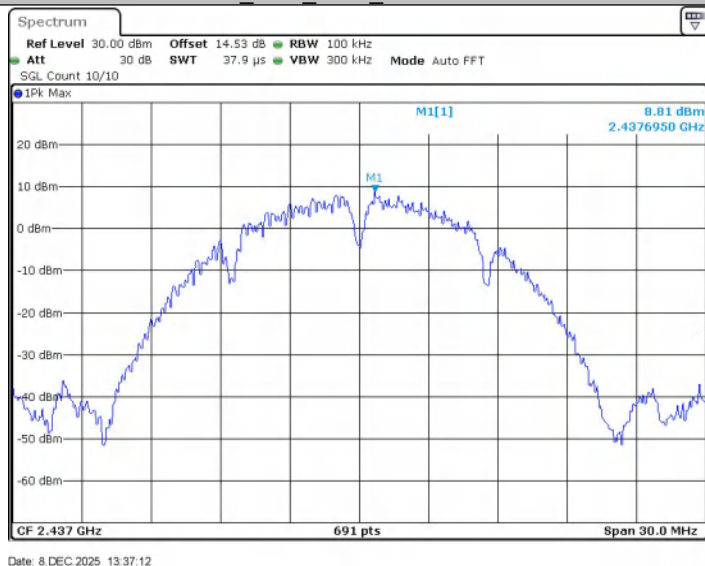

11B_Ant1_2437_30~1000

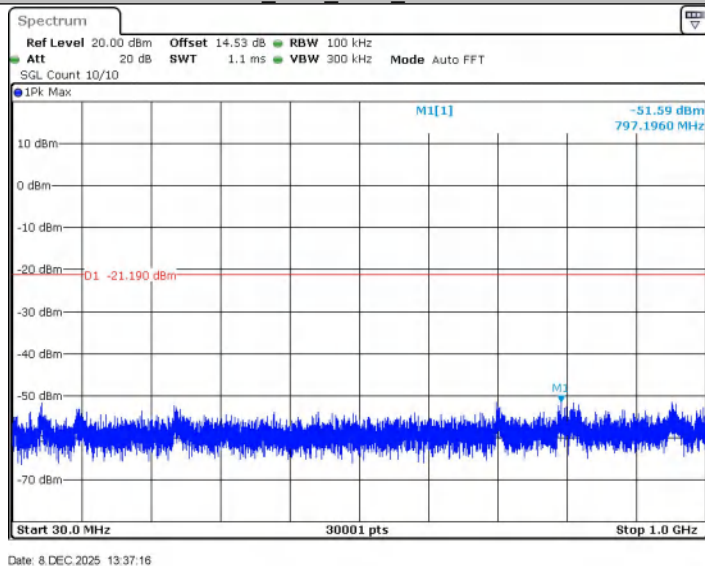


11B_Ant1_2437_1000~26500

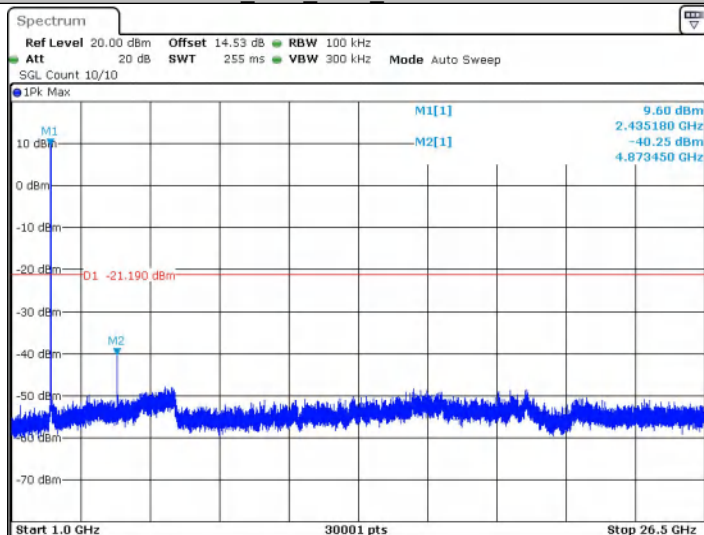


Date: 8 DEC 2025 13:37:27

11B_Ant1_2462_0~Reference

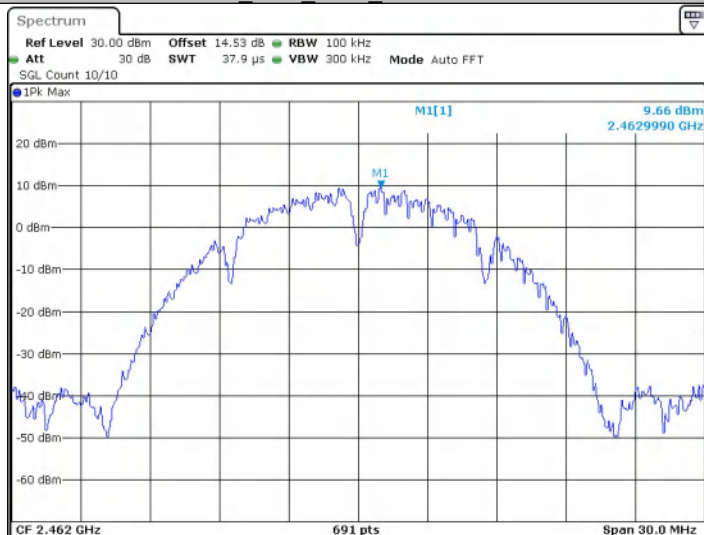


Date: 8 DEC 2025 13:38:54


11B_Ant1_2462_30~1000

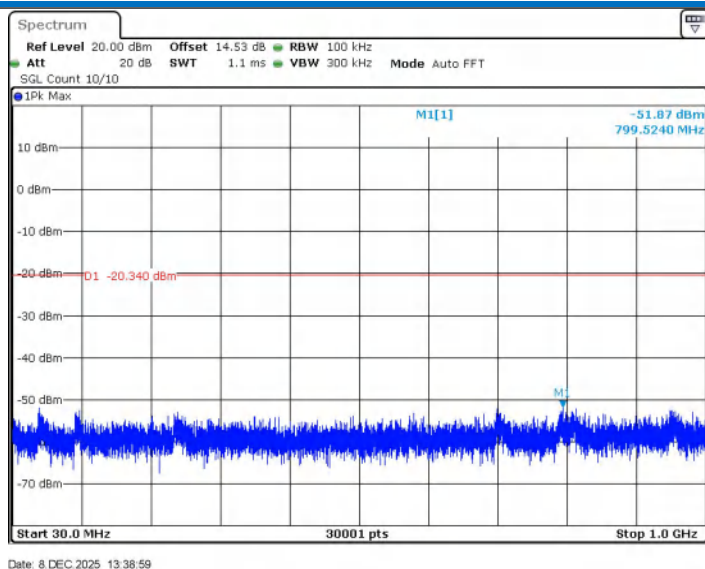


11B_Ant1_2462_1000~26500

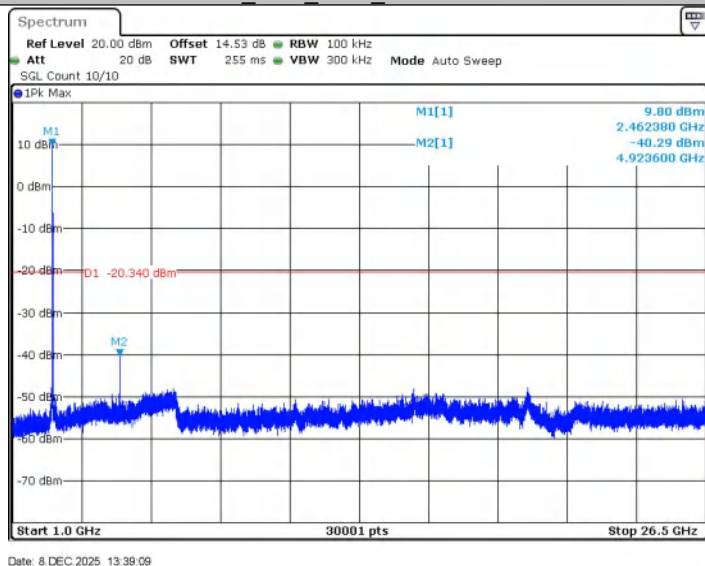

11G_Ant1_2412_0~Reference

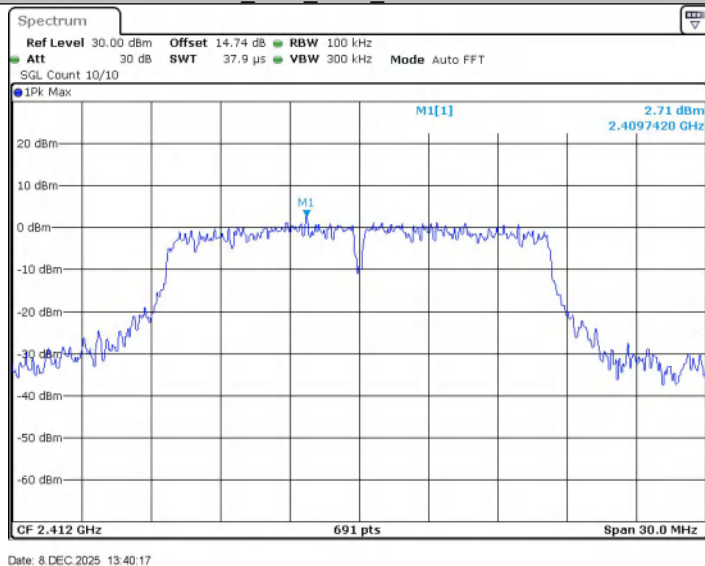


11G_Ant1_2412_30~1000

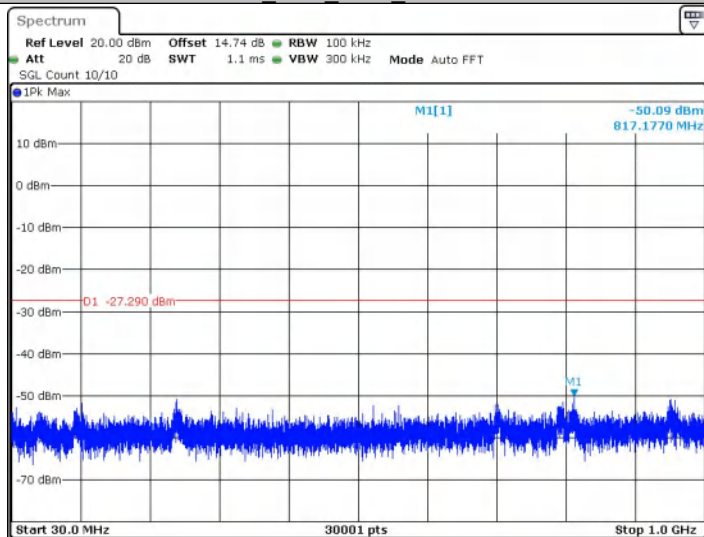


Date: 8 DEC 2025 13:40:21

11G_Ant1_2412_1000~26500

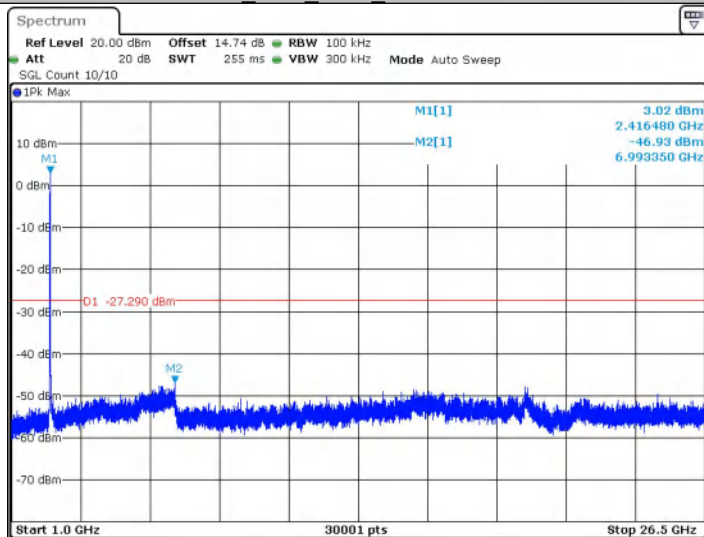


Date: 8 DEC 2025 13:40:32


11G_Ant1_2437_0~Reference

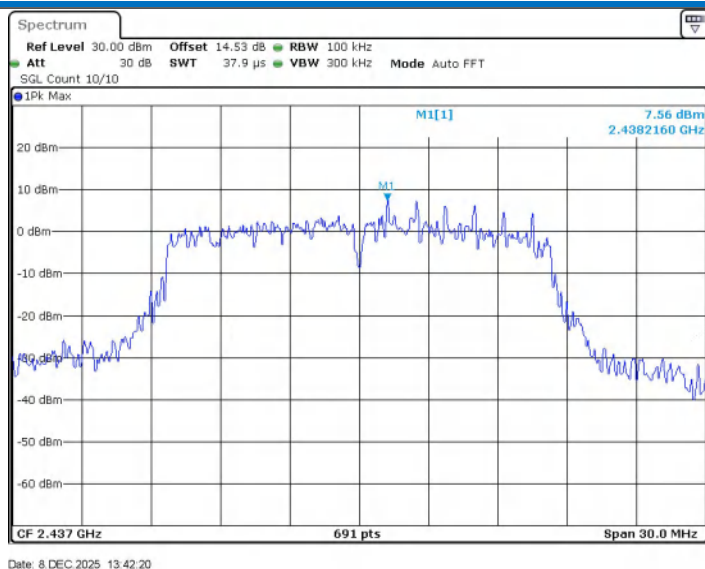


11G_Ant1_2437_30~1000

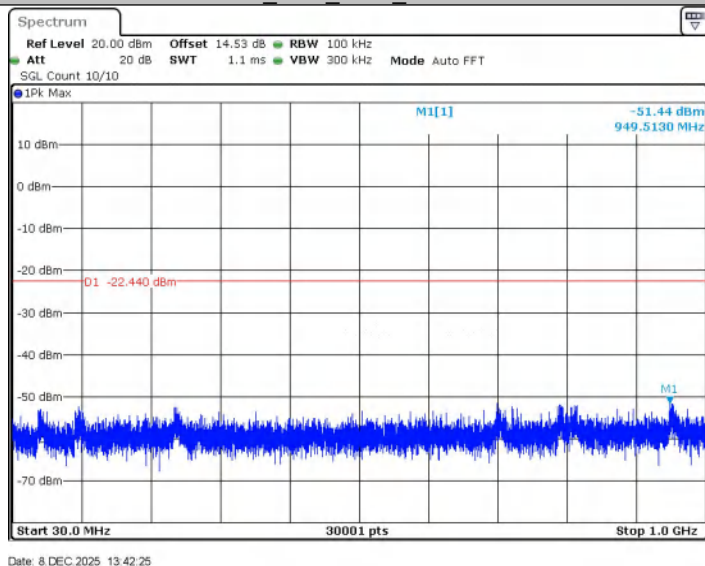

11G_Ant1_2437_1000~26500

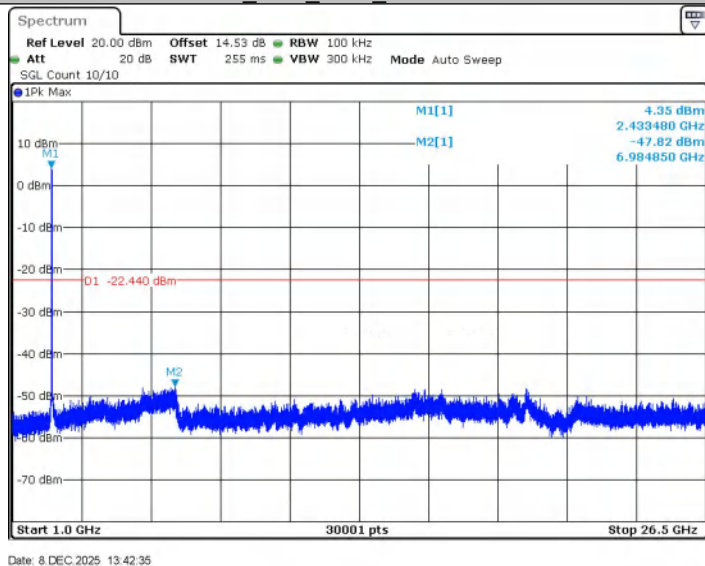


11G_Ant1_2462_0~Reference

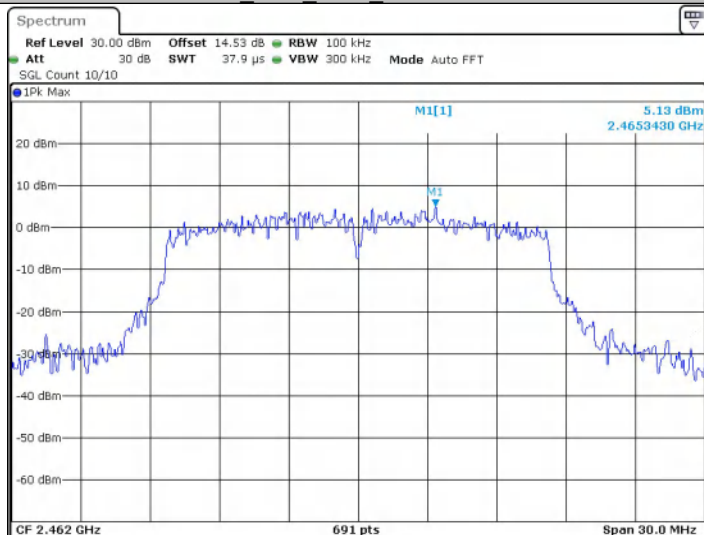


Date: 8 DEC 2025 13:43:31

11G_Ant1_2462_30~1000

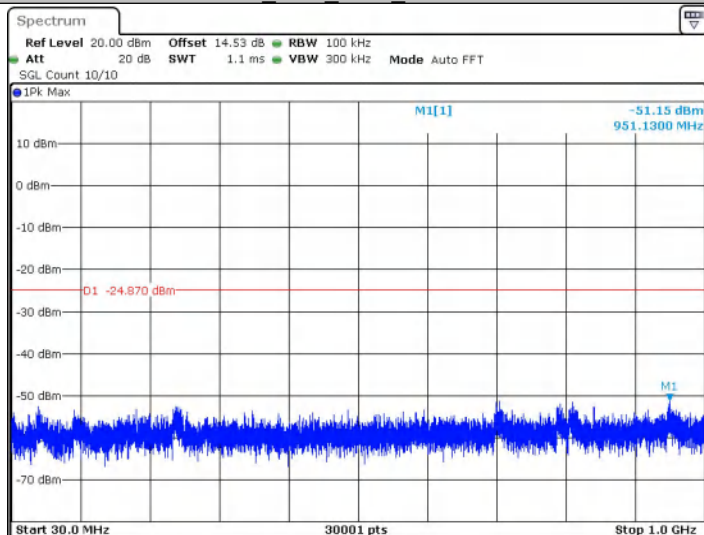


Date: 8 DEC 2025 13:43:35


11G_Ant1_2462_1000~26500

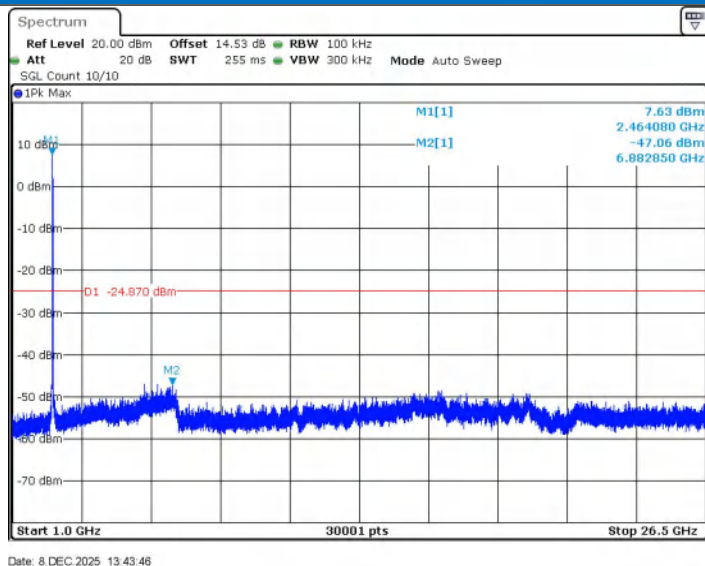


11N20SISO_Ant1_2412_0~Reference

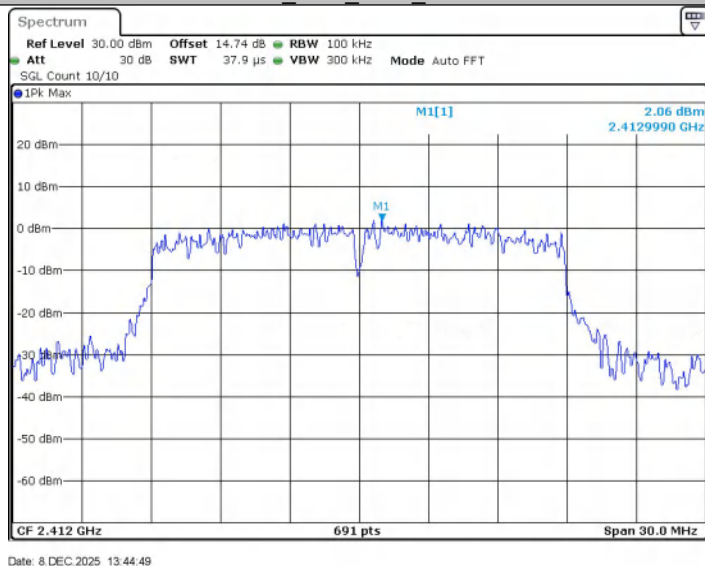

11N20SISO_Ant1_2412_30~1000

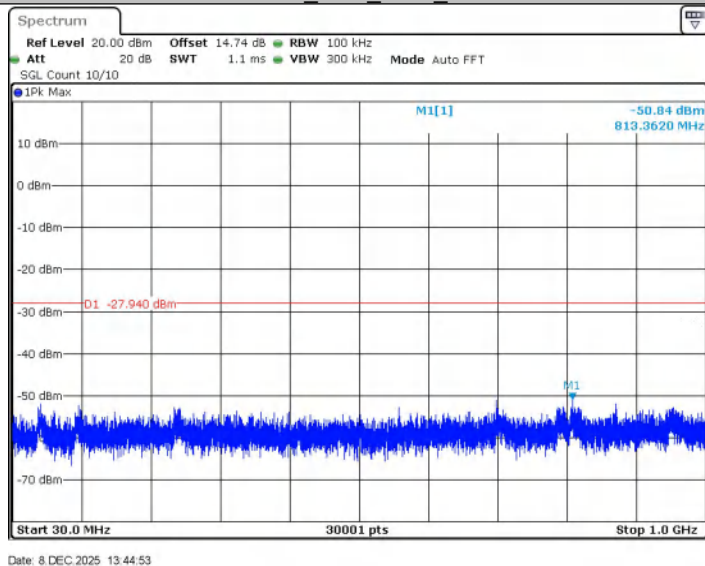


11N20SISO_Ant1_2412_1000~26500

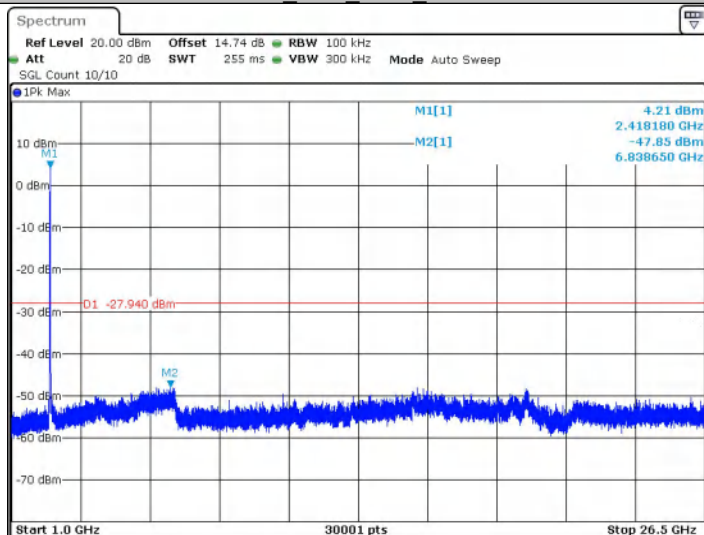


Date: 8 DEC 2025 13:45:04

11N20SISO_Ant1_2437_0~Reference

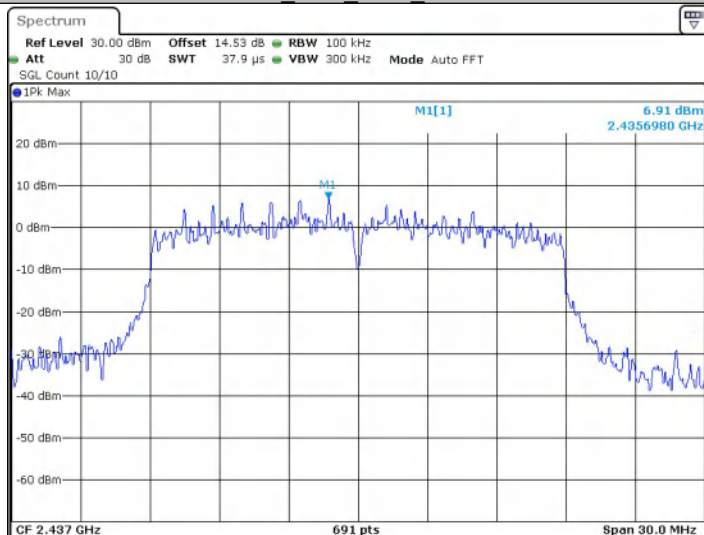


Date: 8 DEC 2025 13:45:55


11N20SISO_Ant1_2437_30~1000

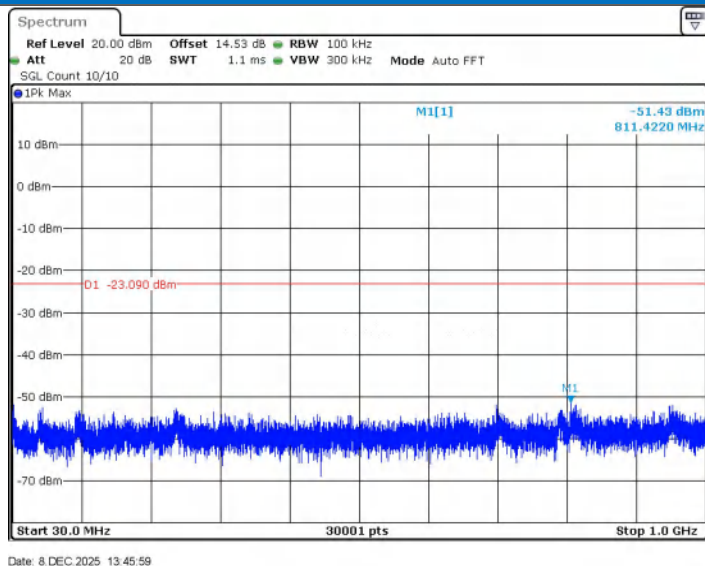


11N20SISO_Ant1_2437_1000~26500

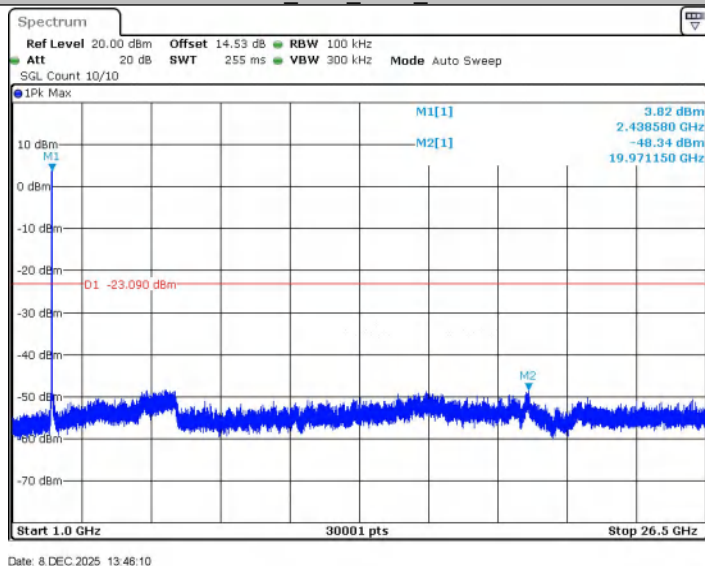

11N20SISO_Ant1_2462_0~Reference

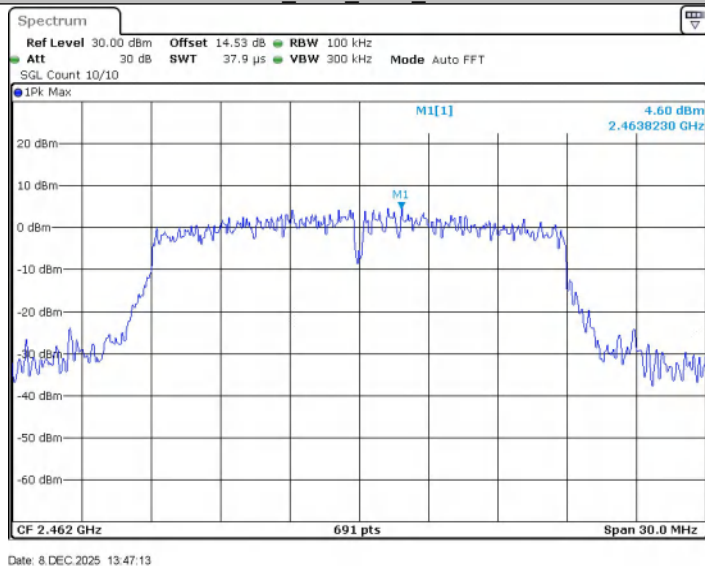


11N20SISO_Ant1_2462_30~1000

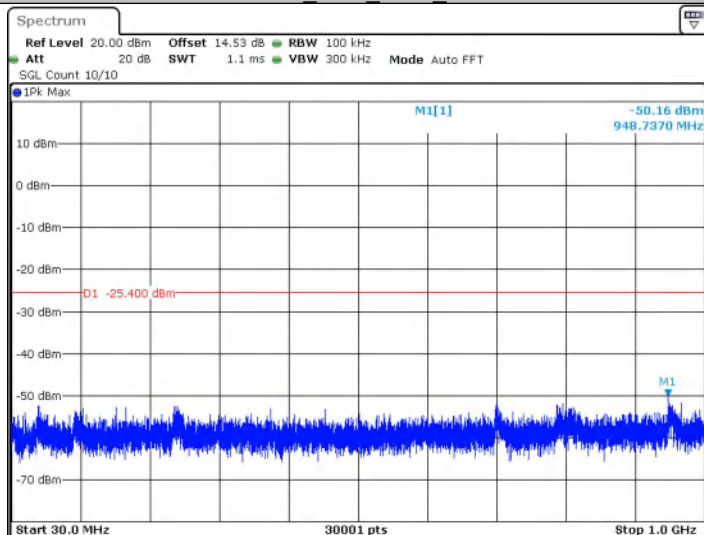


Date: 8 DEC 2025 13:47:17

11N20SISO_Ant1_2462_1000~26500

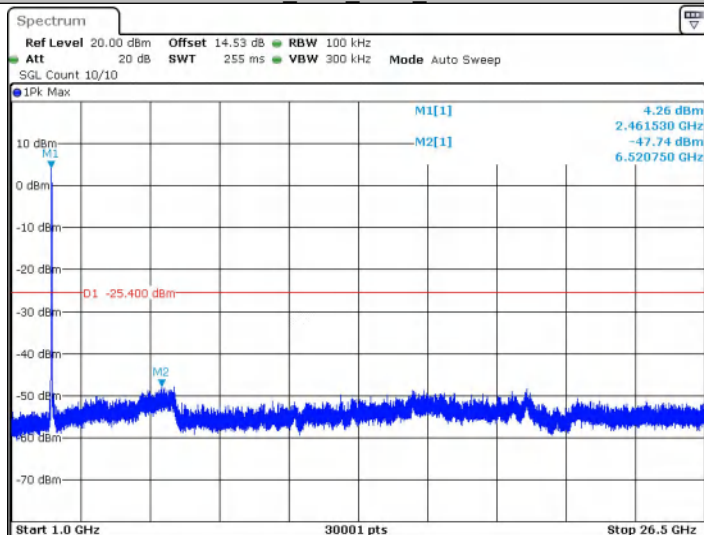


Date: 8 DEC 2025 13:47:28


11N40SISO_Ant1_2422_0~Reference

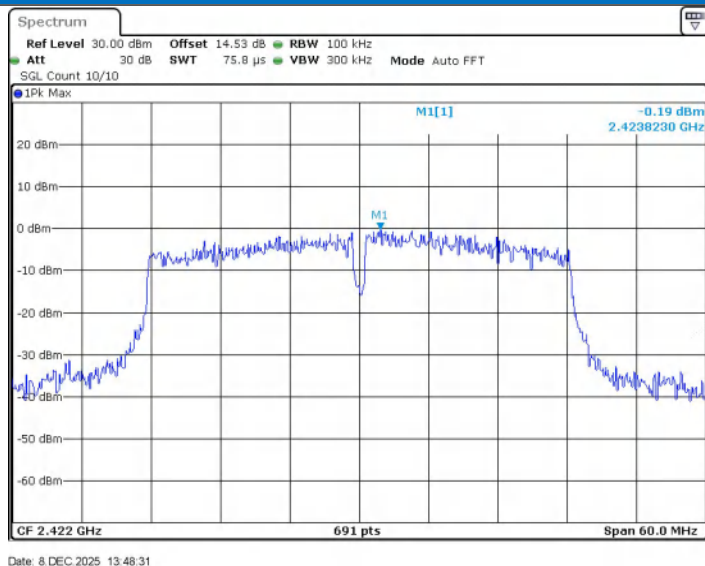


11N40SISO_Ant1_2422_30~1000

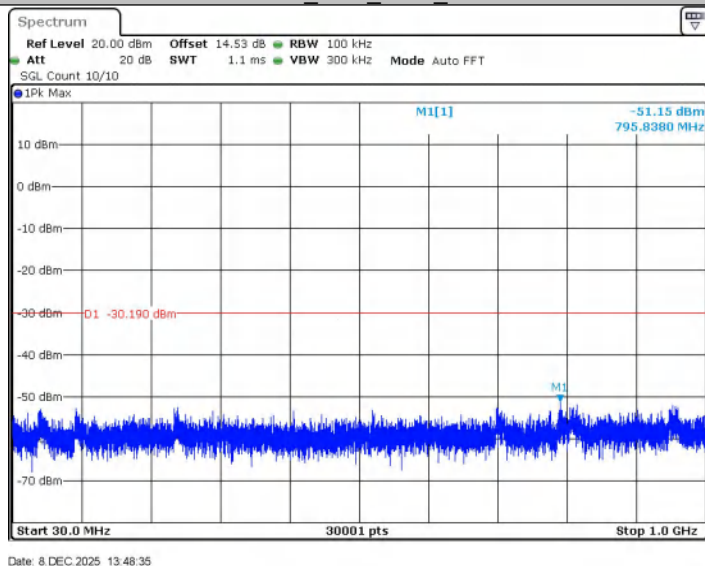

11N40SISO_Ant1_2422_1000~26500

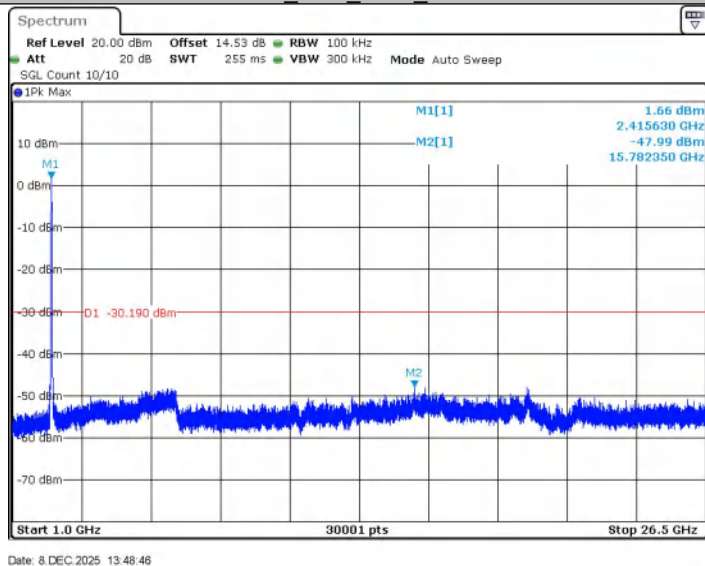


11N40SISO_Ant1_2437_0~Reference

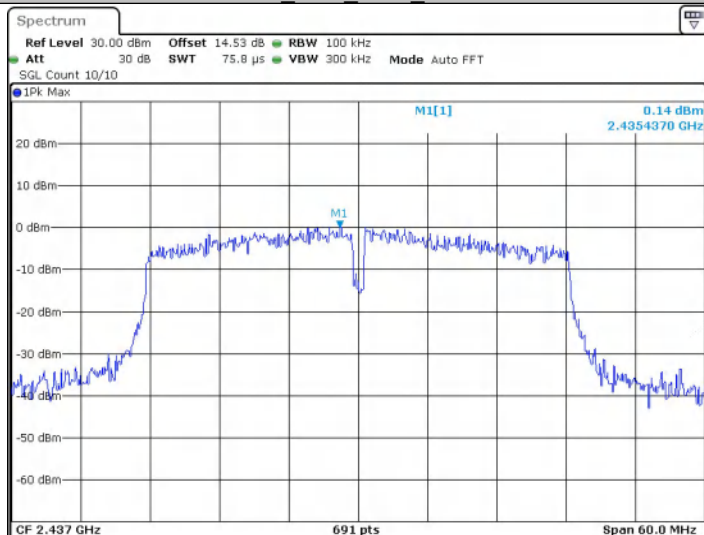


Date: 8 DEC 2025 13:49:43

11N40SISO_Ant1_2437_30~1000

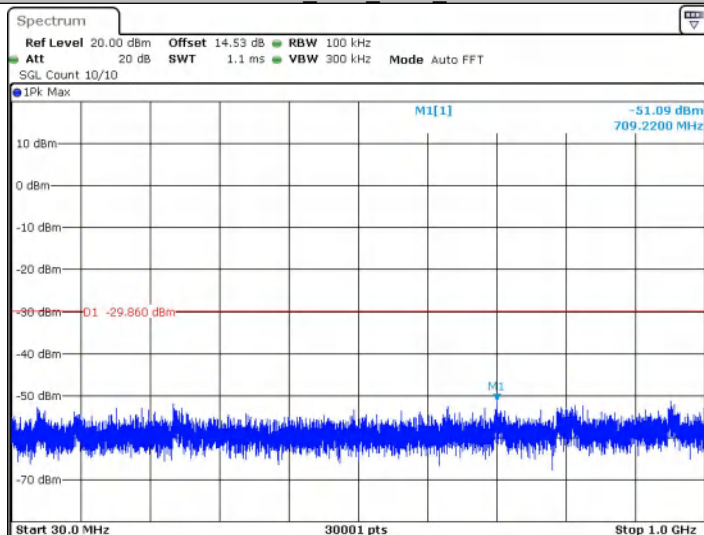


Date: 8 DEC 2025 13:49:47


11N40SISO_Ant1_2437_1000~26500

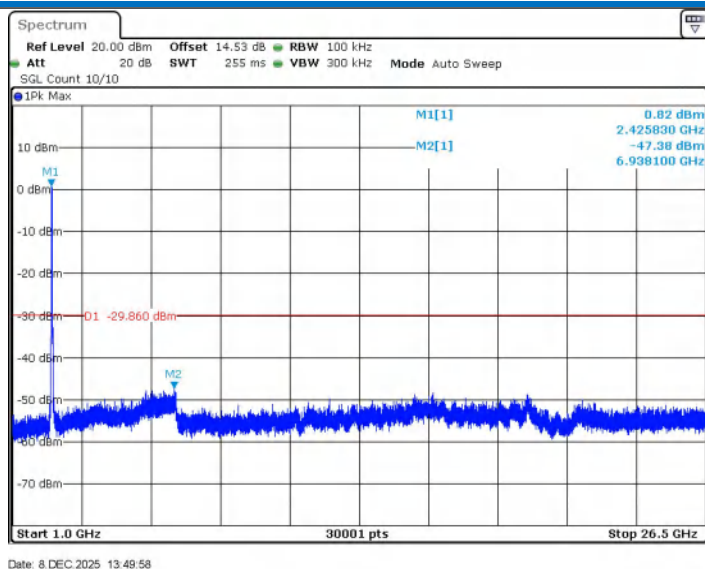


11N40SISO_Ant1_2452_0~Reference

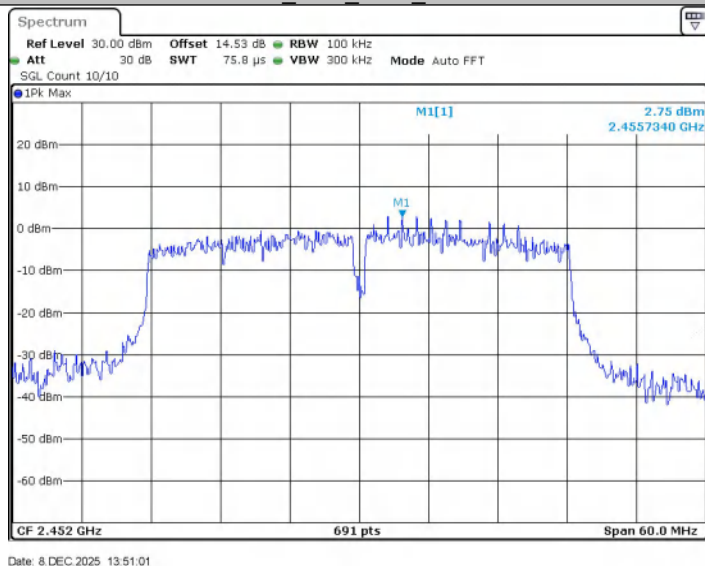

11N40SISO_Ant1_2452_30~1000

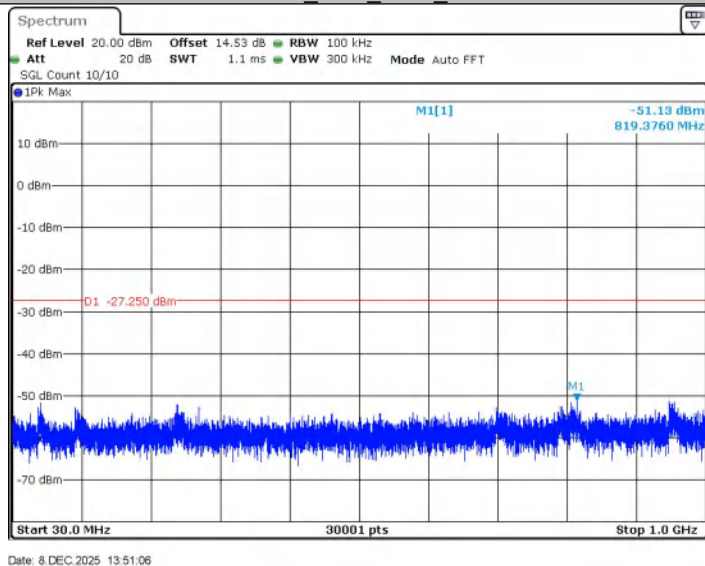

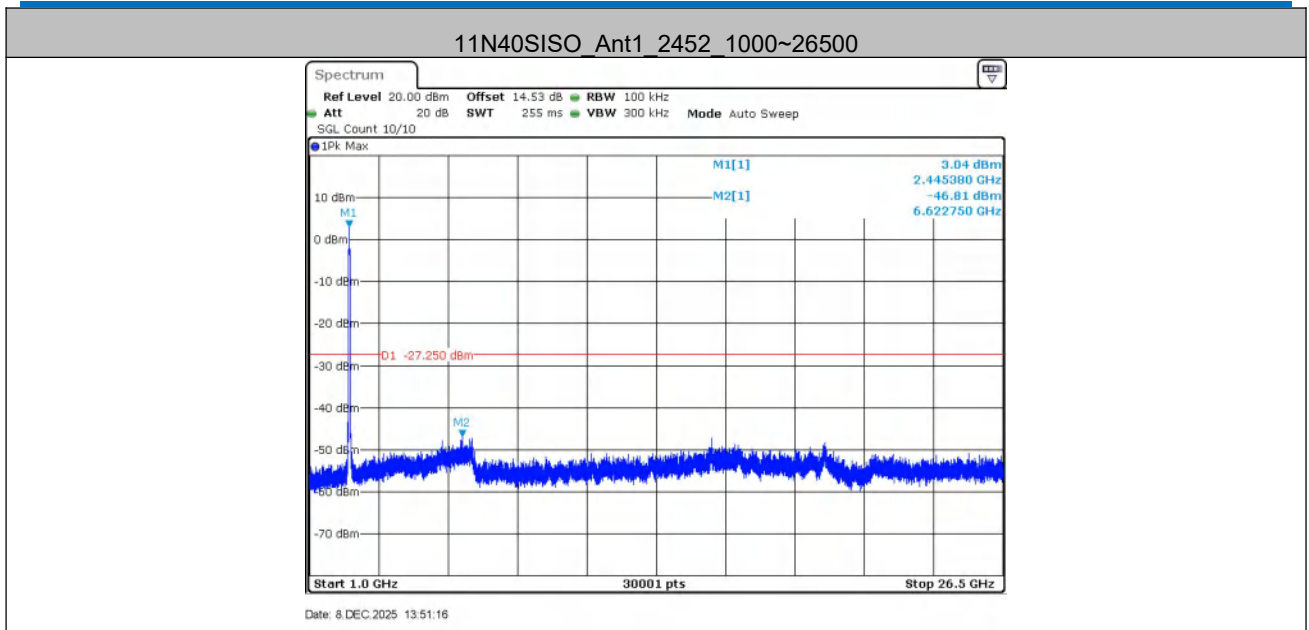

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

5.8 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2020				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:

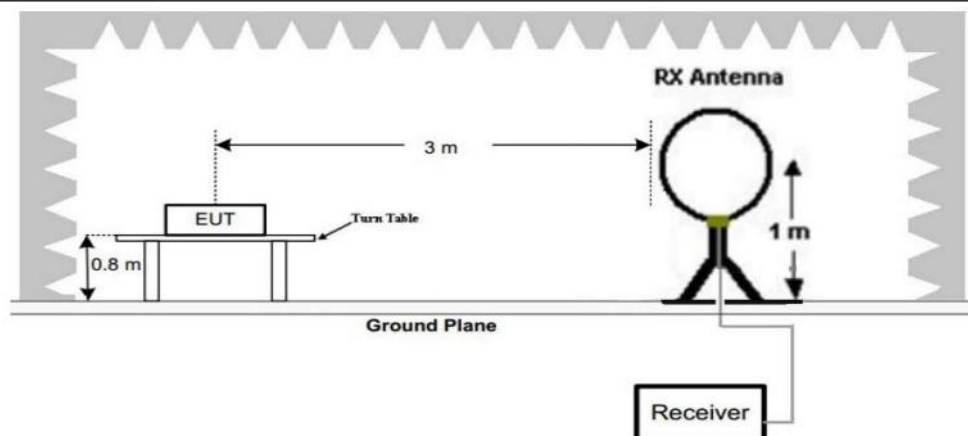


Figure 1. Below 30MHz

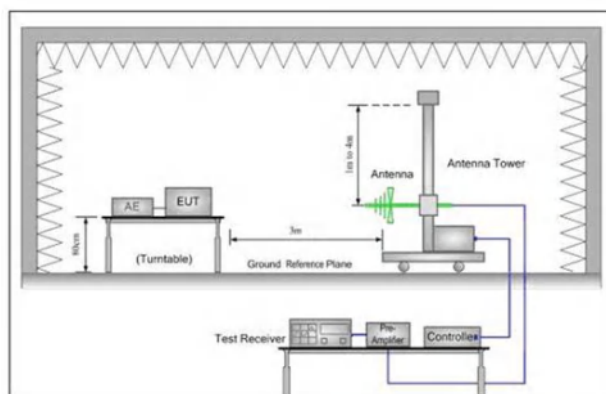


Figure 2. 30MHz to 1GHz

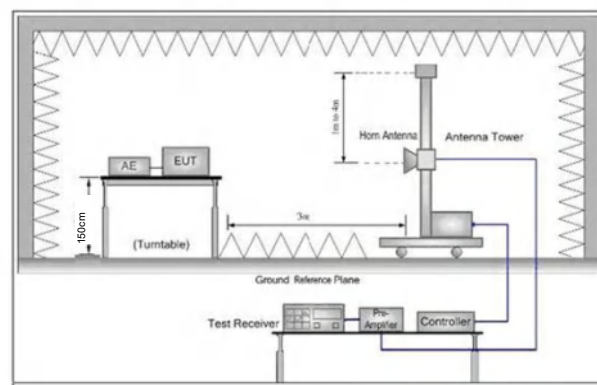


Figure 3. Above 1 GHz


Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case . i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

5.8.1 Radiated emission below 1GHz

1#: 30MHz~1GHz		
Test mode:	Transmitting	Vertical

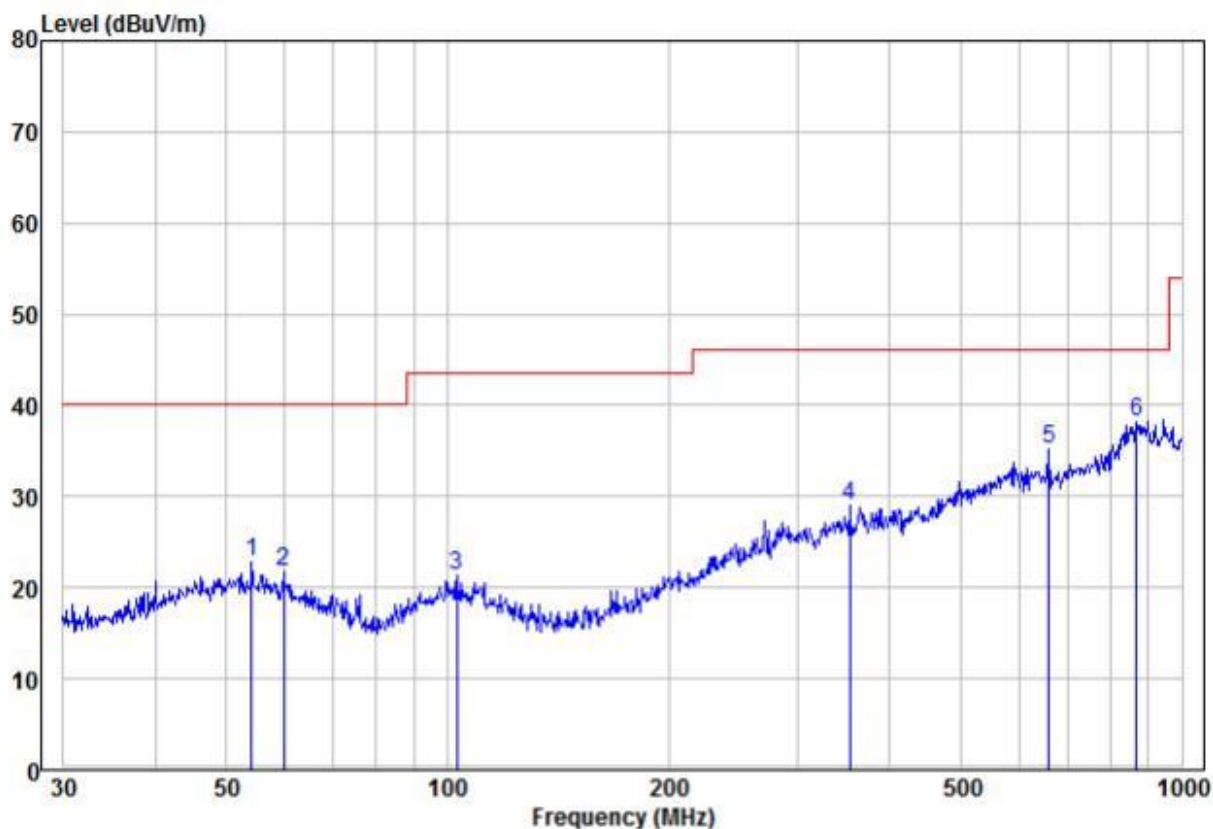

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	54.07	23.03	-0.19	22.84	40.00	-17.16	Peak	VERTICAL
2	59.86	21.65	0.00	21.65	40.00	-18.35	Peak	VERTICAL
3	103.08	21.28	0.00	21.28	43.50	-22.22	Peak	VERTICAL
4	352.94	27.11	2.00	29.11	46.00	-16.89	Peak	VERTICAL
5	658.84	34.64	0.50	35.14	46.00	-10.86	Peak	VERTICAL
6 pp	869.13	34.70	3.50	38.20	46.00	-7.80	Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,


Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

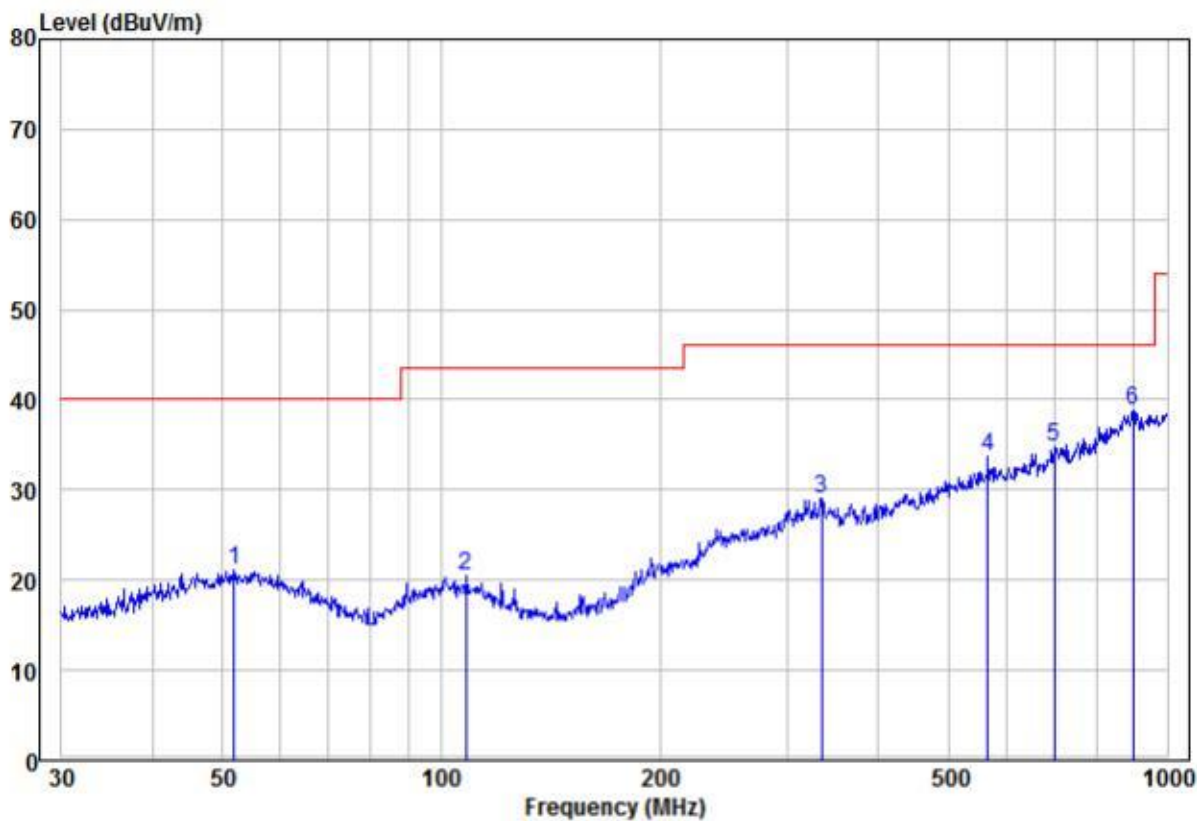

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	51.84	21.75	-0.63	21.12	40.00	-18.88	Peak	HORIZONTAL
2	108.27	20.47	0.00	20.47	43.50	-23.03	Peak	HORIZONTAL
3	333.69	27.11	2.00	29.11	46.00	-16.89	Peak	HORIZONTAL
4	566.62	32.62	1.00	33.62	46.00	-12.38	Peak	HORIZONTAL
5	699.30	33.72	1.00	34.72	46.00	-11.28	Peak	HORIZONTAL
6 pp	897.00	35.45	3.30	38.75	46.00	-7.25	Peak	HORIZONTAL

2#: 30MHz~1GHz		
Test mode:	Transmitting	Vertical

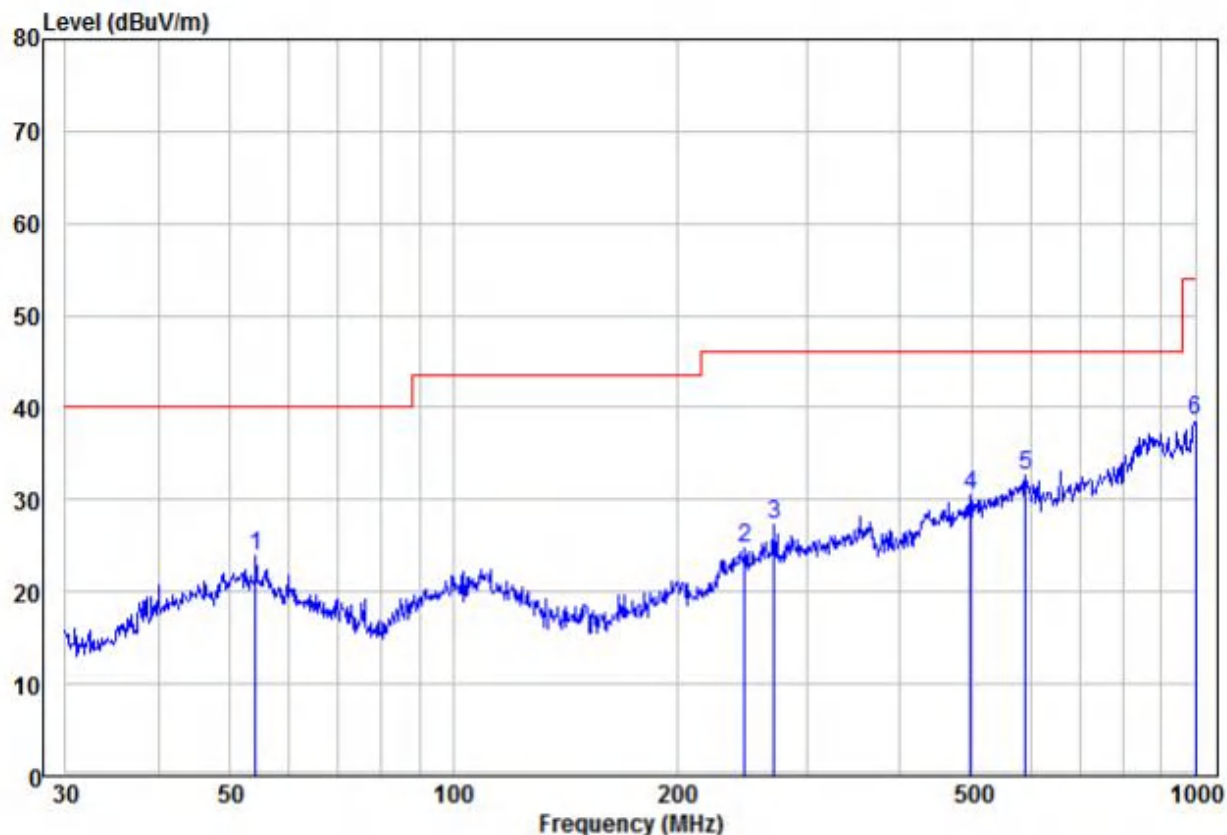

	Freq	Read		Limit	Over		
	MHz	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1	54.07	24.03	-0.19	23.84	40.00	-16.16	Peak
2	246.81	22.81	2.00	24.81	46.00	-21.19	Peak
3	270.37	25.41	2.00	27.41	46.00	-18.59	Peak
4	497.68	29.56	1.00	30.56	46.00	-15.44	Peak
5 pp	590.97	32.14	0.50	32.64	46.00	-13.36	Peak
6	1000.00	36.52	2.00	38.52	54.00	-15.48	Peak

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,


Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

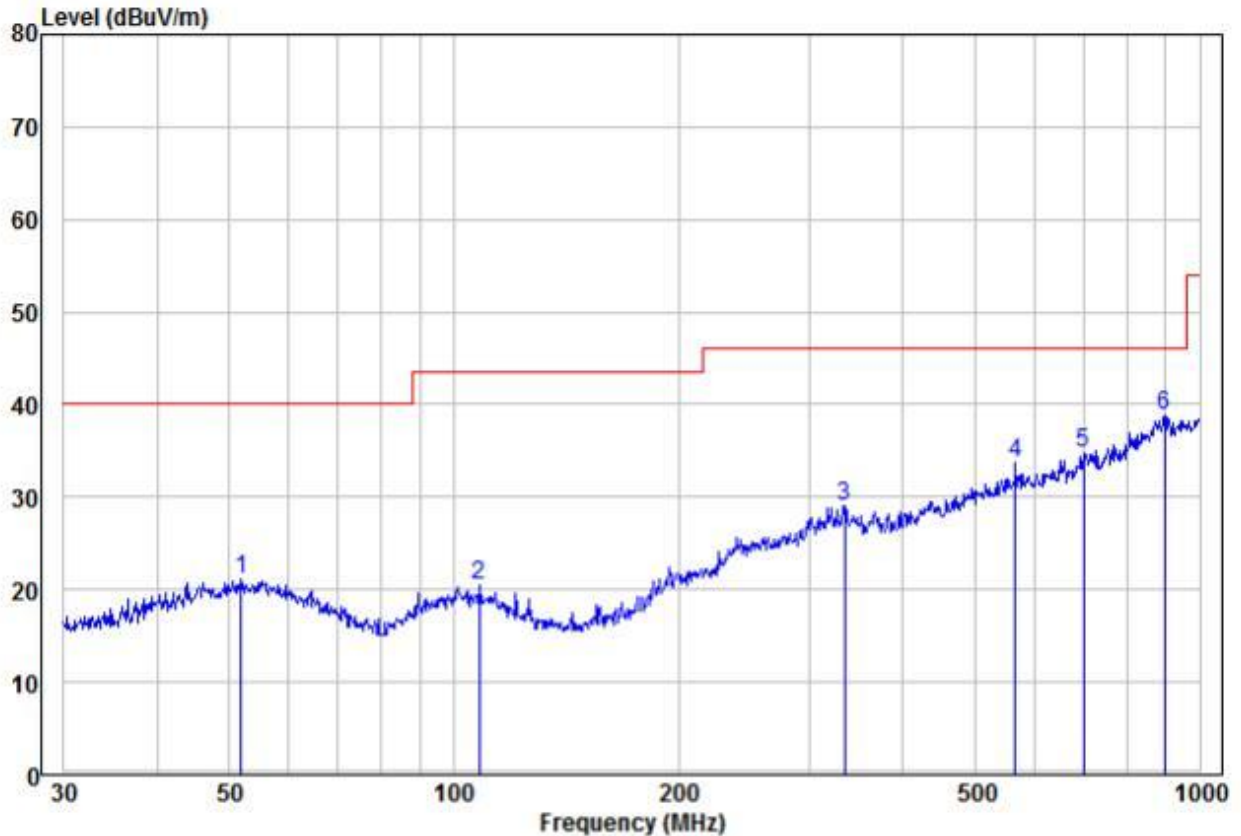

	Freq	Read Level	Factor	Limit Level	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dB		
1	51.84	21.75	-0.63	21.12	40.00	-18.88 Peak	HORIZONTAL
2	108.27	20.47	0.00	20.47	43.50	-23.03 Peak	HORIZONTAL
3	333.69	27.11	2.00	29.11	46.00	-16.89 Peak	HORIZONTAL
4	566.62	32.62	1.00	33.62	46.00	-12.38 Peak	HORIZONTAL
5	699.30	33.72	1.00	34.72	46.00	-11.28 Peak	HORIZONTAL
6 pp	897.00	35.45	3.30	38.75	46.00	-7.25 Peak	HORIZONTAL

3#: 30MHz~1GHz		
Test mode:	Transmitting	Vertical

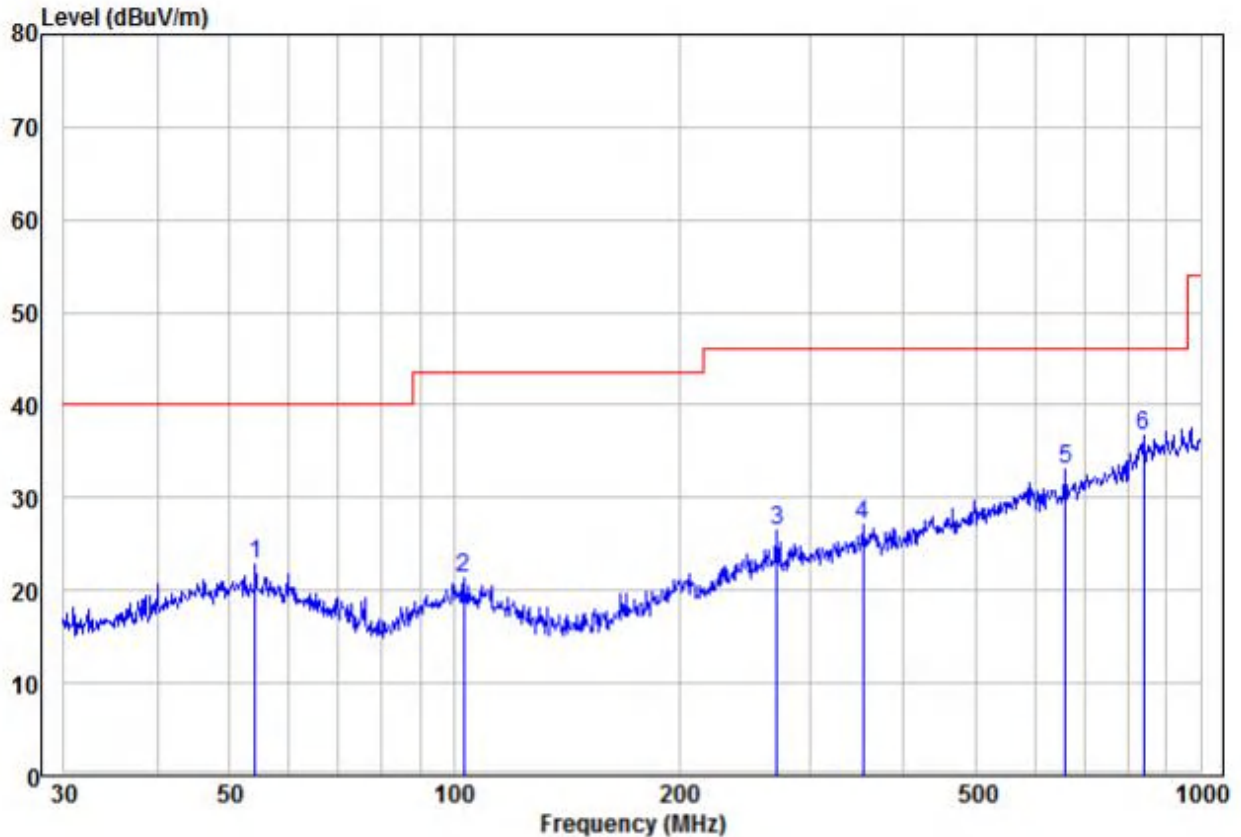

	Read Freq	Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	54.07	23.03	-0.19	22.84	40.00	-17.16	Peak	VERTICAL
2	103.08	21.28	0.00	21.28	43.50	-22.22	Peak	VERTICAL
3	270.37	24.41	2.00	26.41	46.00	-19.59	Peak	VERTICAL
4	352.94	25.11	2.00	27.11	46.00	-18.89	Peak	VERTICAL
5	658.84	32.64	0.50	33.14	46.00	-12.86	Peak	VERTICAL
6 pp	839.18	33.24	3.50	36.74	46.00	-9.26	Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,


Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

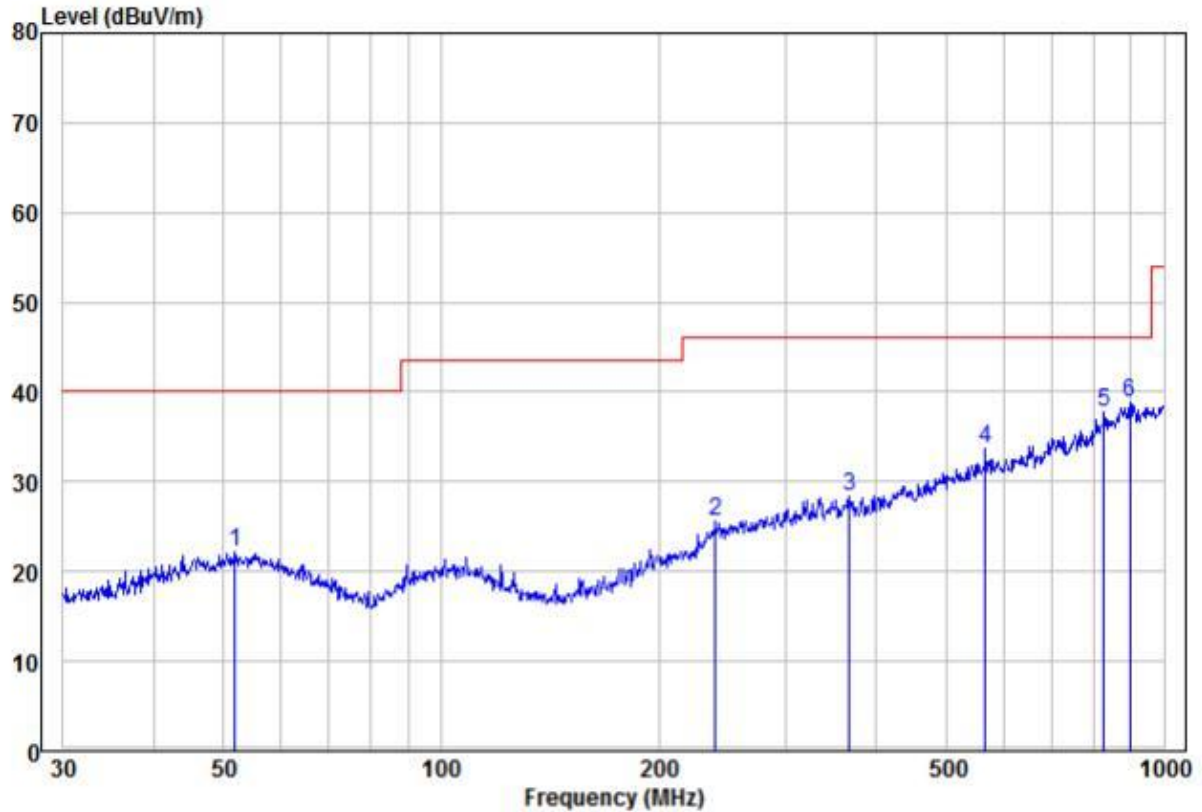

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	51.84	22.75	-0.63	22.12	40.00	-17.88	Peak	HORIZONTAL
2	239.99	23.76	1.80	25.56	46.00	-20.44	Peak	HORIZONTAL
3	366.82	26.30	2.00	28.30	46.00	-17.70	Peak	HORIZONTAL
4	566.62	32.62	1.00	33.62	46.00	-12.38	Peak	HORIZONTAL
5	827.49	34.73	3.00	37.73	46.00	-8.27	Peak	HORIZONTAL
6 pp	897.00	35.45	3.30	38.75	46.00	-7.25	Peak	HORIZONTAL

4#: 30MHz~1GHz		
Test mode:	Transmitting	Vertical

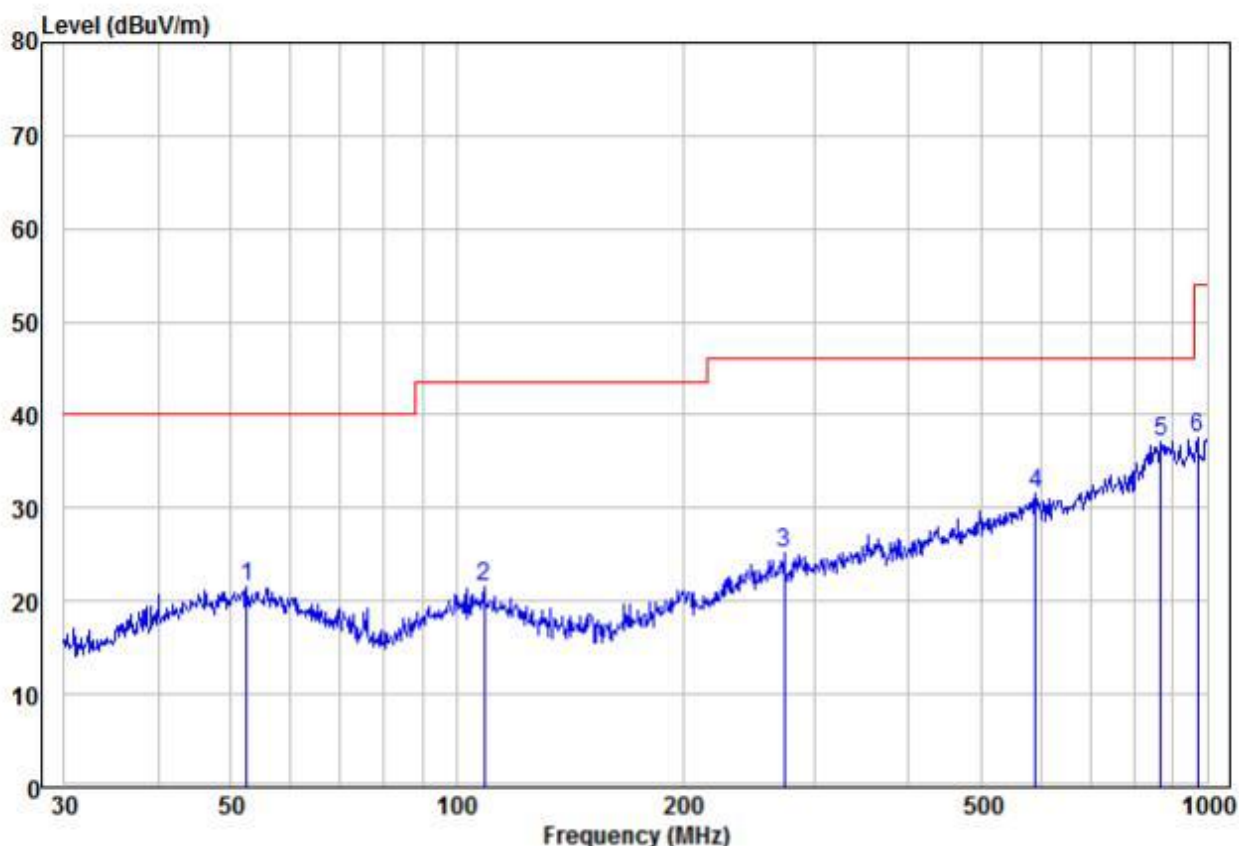

	Read Freq	Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	52.58	21.98	-0.48	21.50	40.00	-18.50	Peak	VERTICAL
2	108.65	21.47	0.00	21.47	43.50	-22.03	Peak	VERTICAL
3	273.23	23.18	2.00	25.18	46.00	-20.82	Peak	VERTICAL
4	590.97	31.14	0.50	31.64	46.00	-14.36	Peak	VERTICAL
5 pp	869.13	33.70	3.50	37.20	46.00	-8.80	Peak	VERTICAL
6	972.34	35.55	2.00	37.55	54.00	-16.45	Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,


Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

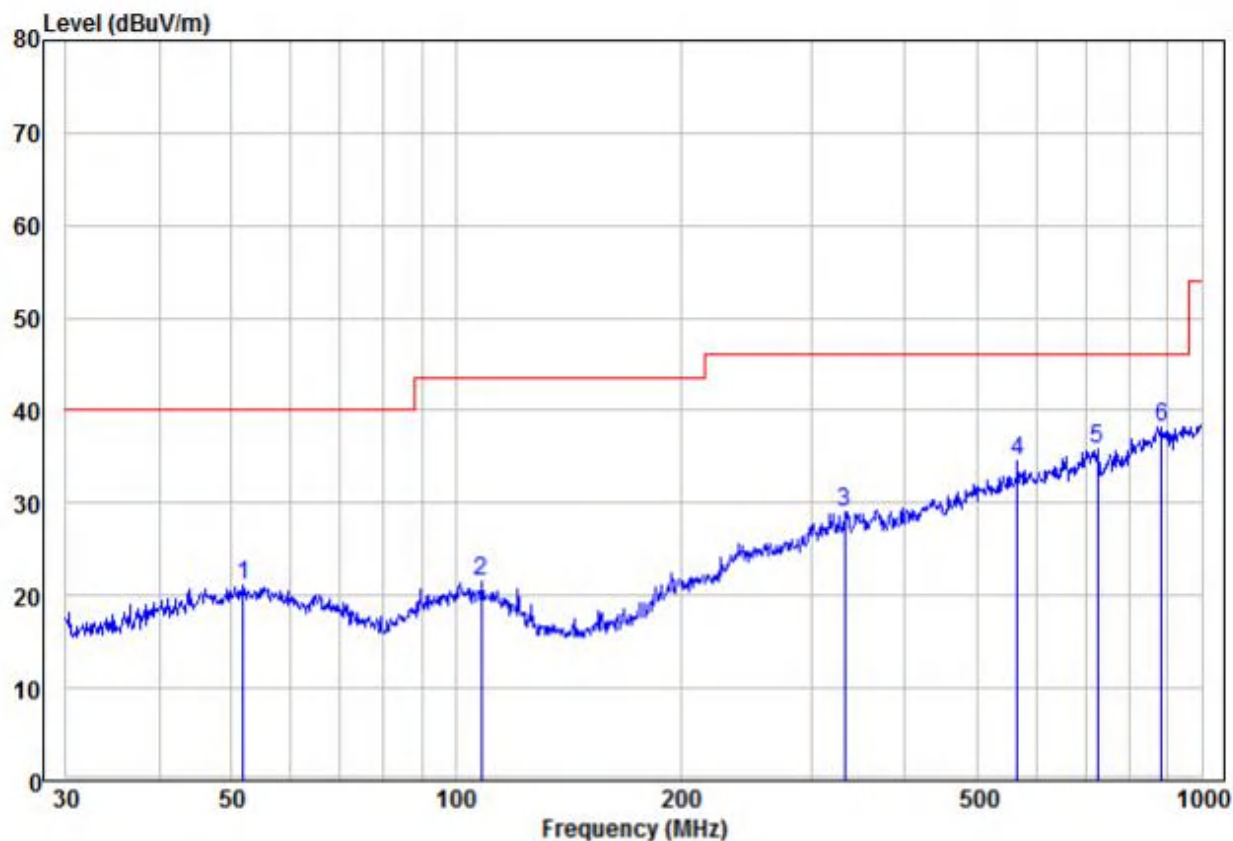

	Read Freq	Level dBuV	Factor dB/m	Limit Level dBuV/m	Over Line dBuV/m	Over Limit dB	Remark	Pol/Phase
	MHz							
1	51.84	21.75	-0.63	21.12	40.00	-18.88	Peak	HORIZONTAL
2	108.27	21.47	0.00	21.47	43.50	-22.03	Peak	HORIZONTAL
3	332.52	27.00	2.00	29.00	46.00	-17.00	Peak	HORIZONTAL
4	566.62	33.62	1.00	34.62	46.00	-11.38	Peak	HORIZONTAL
5	724.26	34.93	1.00	35.93	46.00	-10.07	Peak	HORIZONTAL
6 pp	884.50	34.70	3.50	38.20	46.00	-7.80	Peak	HORIZONTAL

5#: 30MHz~1GHz		
Test mode:	Transmitting	Vertical

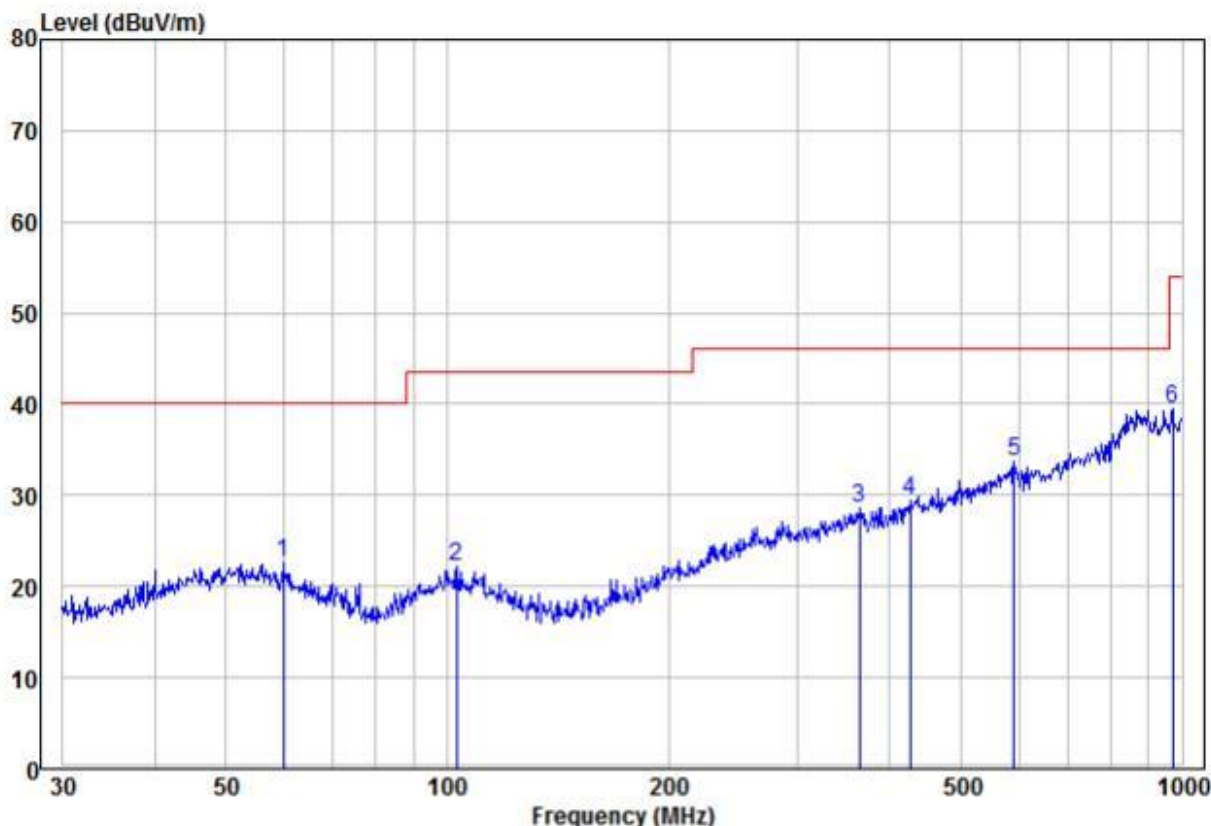

	Read Freq	Level	Factor	Limit Level	Over Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	59.86	22.65	0.00	22.65	40.00	-17.35	Peak	VERTICAL
2	103.08	22.28	0.00	22.28	43.50	-21.22	Peak	VERTICAL
3	364.26	26.60	2.00	28.60	46.00	-17.40	Peak	VERTICAL
4	426.52	28.43	1.00	29.43	46.00	-16.57	Peak	VERTICAL
5 pp	590.97	33.14	0.50	33.64	46.00	-12.36	Peak	VERTICAL
6	972.34	37.55	2.00	39.55	54.00	-14.45	Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,


Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

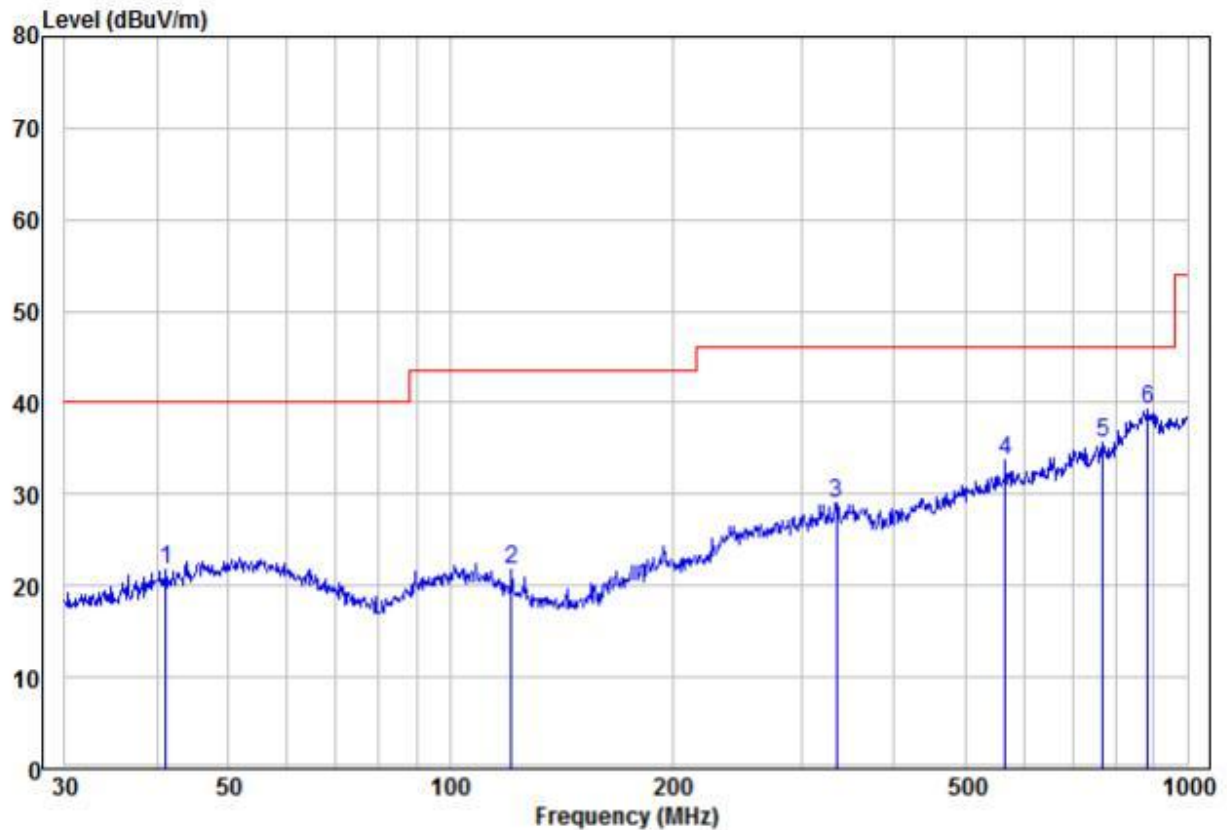

	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	41.13	23.56	-1.89	21.67	40.00	-18.33 Peak	HORIZONTAL
2	121.12	21.66	0.00	21.66	43.50	-21.84 Peak	HORIZONTAL
3	333.69	27.11	2.00	29.11	46.00	-16.89 Peak	HORIZONTAL
4	566.62	32.62	1.00	33.62	46.00	-12.38 Peak	HORIZONTAL
5	768.75	34.07	1.50	35.57	46.00	-10.43 Peak	HORIZONTAL
6 pp	884.50	35.70	3.50	39.20	46.00	-6.80 Peak	HORIZONTAL

6#: 30MHz~1GHz		
Test mode:	Transmitting	Vertical

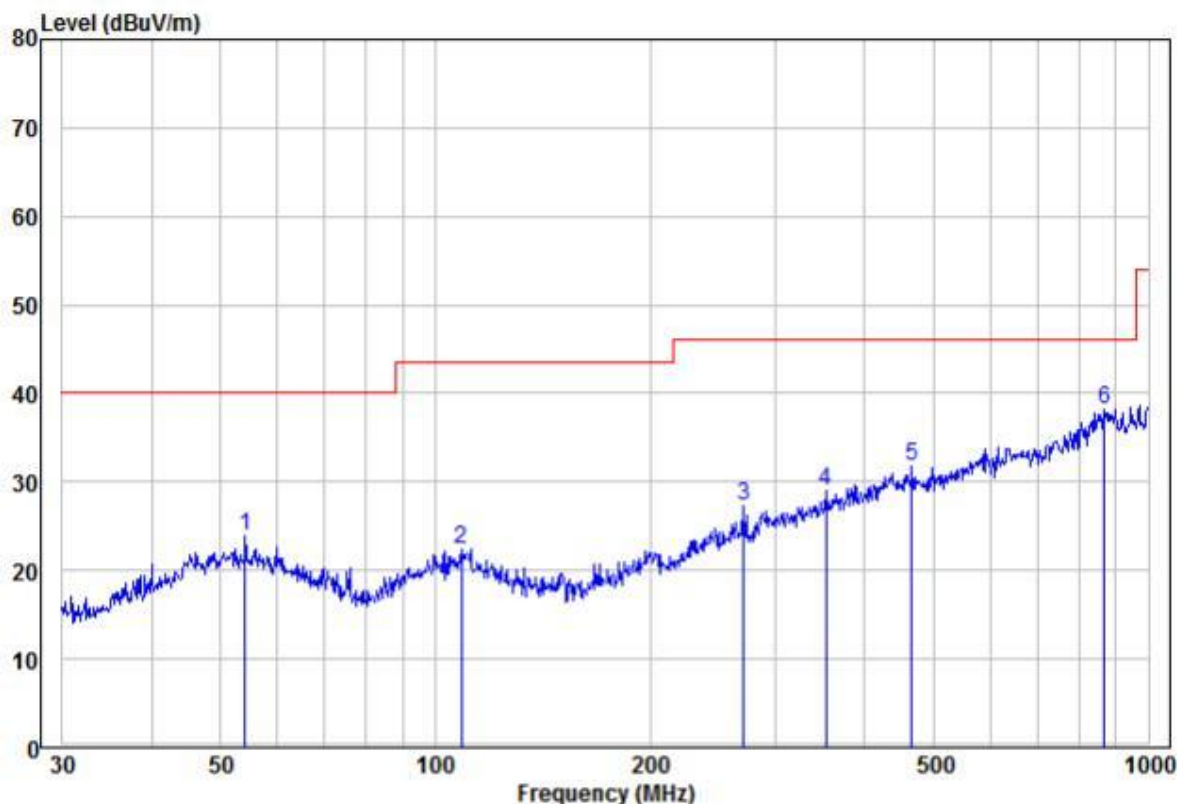

	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	54.07	24.03	-0.19	23.84	40.00	-16.16 Peak	VERTICAL
2	108.65	22.47	0.00	22.47	43.50	-21.03 Peak	VERTICAL
3	270.37	25.41	2.00	27.41	46.00	-18.59 Peak	VERTICAL
4	352.94	27.11	2.00	29.11	46.00	-16.89 Peak	VERTICAL
5	465.60	30.72	1.00	31.72	46.00	-14.28 Peak	VERTICAL
6 pp	869.13	34.70	3.50	38.20	46.00	-7.80 Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,


Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

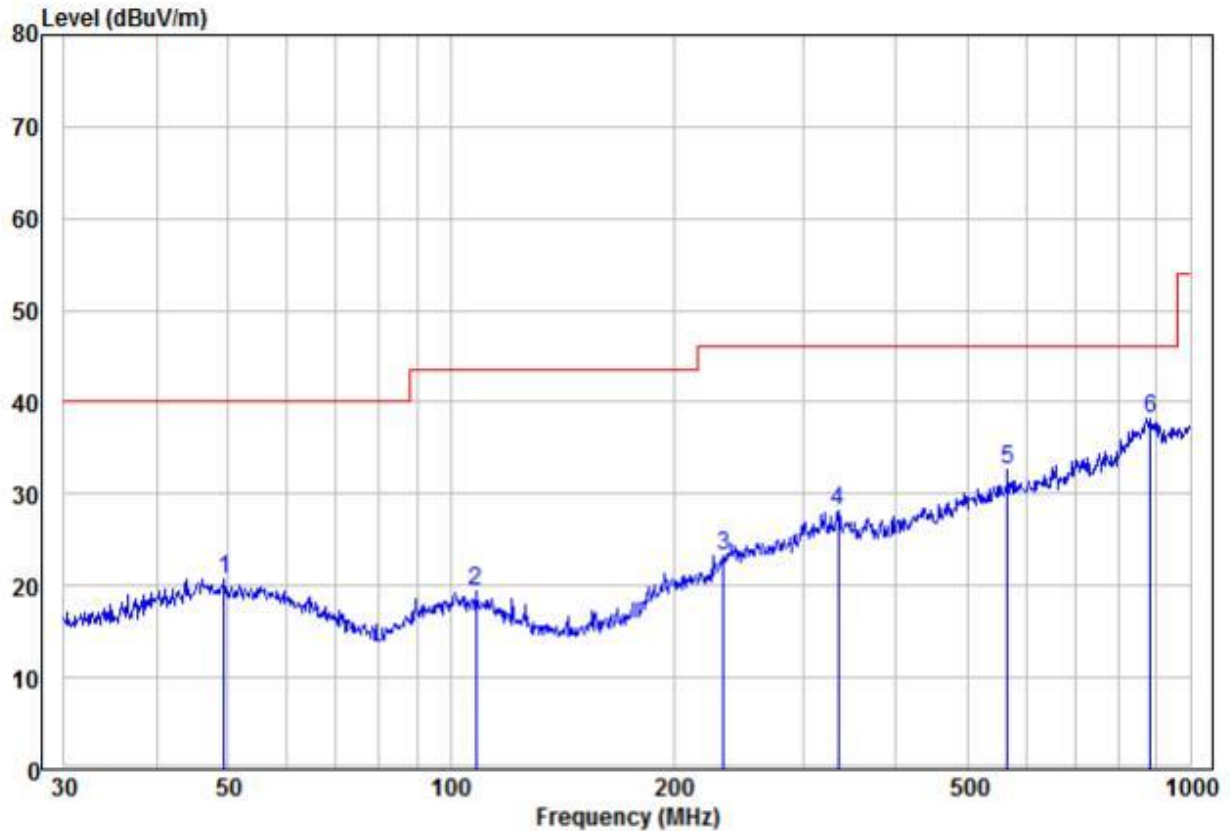

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	49.36	21.76	-1.06	20.70	40.00	-19.30	Peak	HORIZONTAL
2	108.27	19.47	0.00	19.47	43.50	-24.03	Peak	HORIZONTAL
3	234.17	22.03	1.33	23.36	46.00	-22.64	Peak	HORIZONTAL
4	333.69	26.11	2.00	28.11	46.00	-17.89	Peak	HORIZONTAL
5	566.62	31.62	1.00	32.62	46.00	-13.38	Peak	HORIZONTAL
6 pp	884.50	34.70	3.50	38.20	46.00	-7.80	Peak	HORIZONTAL

7#: 30MHz~1GHz		
Test mode:	Transmitting	Vertical

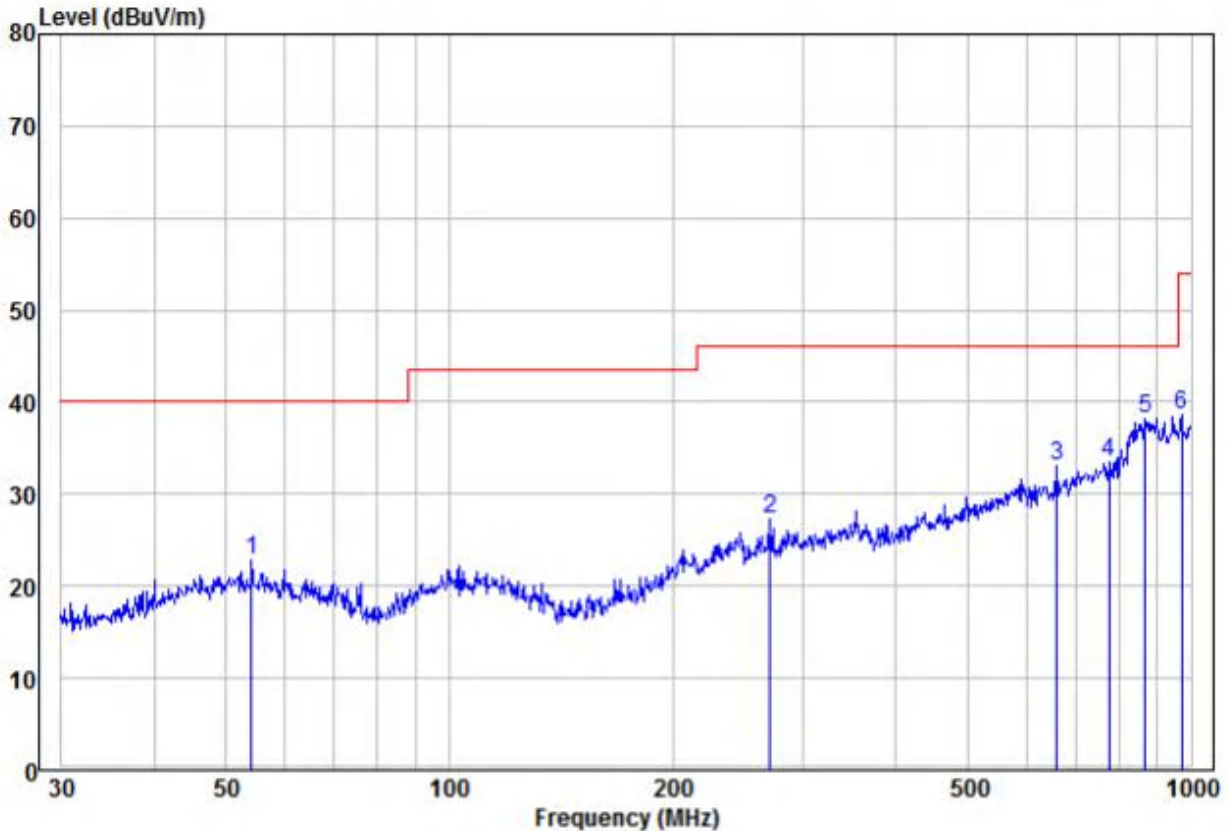

	Read Freq	Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	54.07	23.03	-0.19	22.84	40.00	-17.16	Peak	VERTICAL
2	270.37	25.41	2.00	27.41	46.00	-18.59	Peak	VERTICAL
3	658.84	32.64	0.50	33.14	46.00	-12.86	Peak	VERTICAL
4	774.16	32.02	1.50	33.52	46.00	-12.48	Peak	VERTICAL
5 pp	869.13	34.70	3.50	38.20	46.00	-7.80	Peak	VERTICAL
6	972.34	36.55	2.00	38.55	54.00	-15.45	Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,


Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

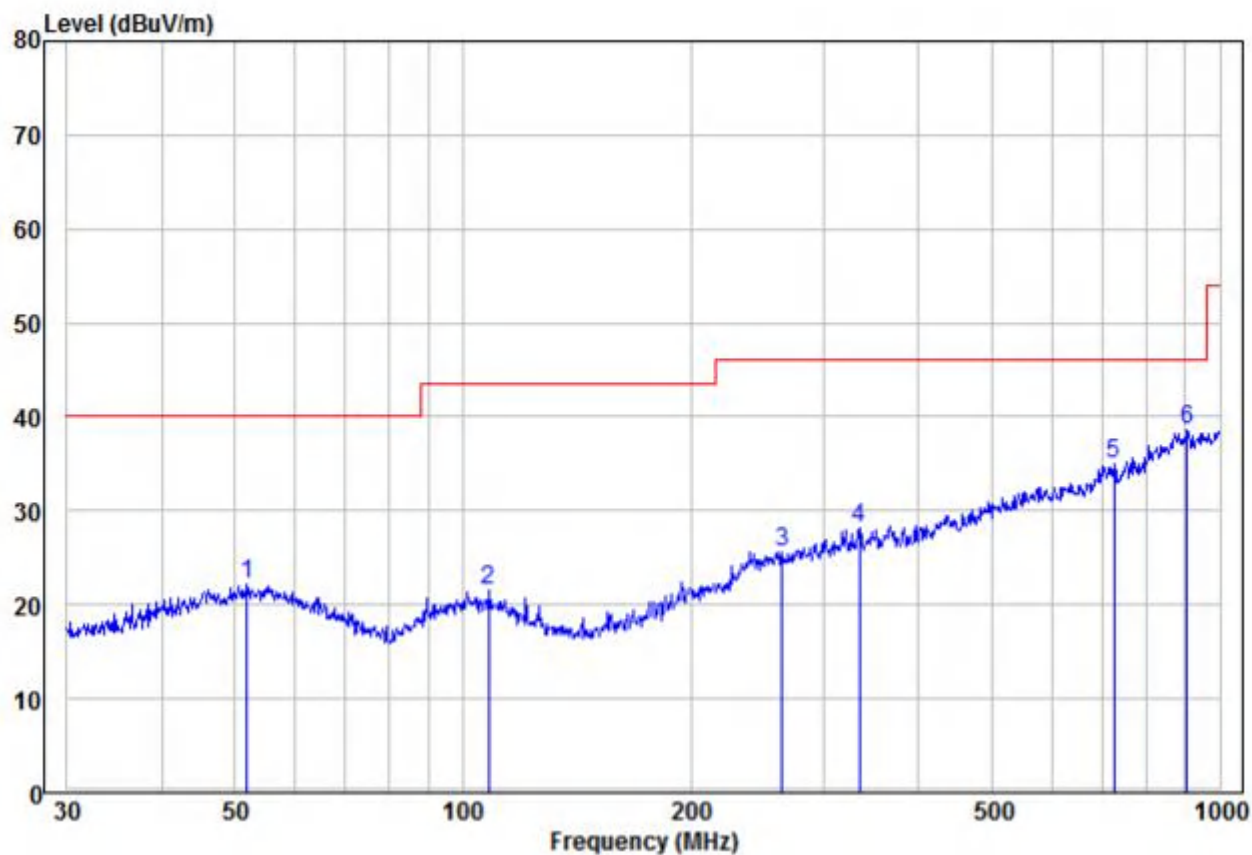

	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	51.84	22.75	-0.63	22.12	40.00	-17.88 Peak	HORIZONTAL
2	108.27	21.47	0.00	21.47	43.50	-22.03 Peak	HORIZONTAL
3	263.82	23.56	2.00	25.56	46.00	-20.44 Peak	HORIZONTAL
4	333.69	26.11	2.00	28.11	46.00	-17.89 Peak	HORIZONTAL
5	724.26	33.93	1.00	34.93	46.00	-11.07 Peak	HORIZONTAL
6 pp	906.48	36.24	2.35	38.59	46.00	-7.41 Peak	HORIZONTAL

8#: 30MHz~1GHz		
Test mode:	Transmitting	Vertical

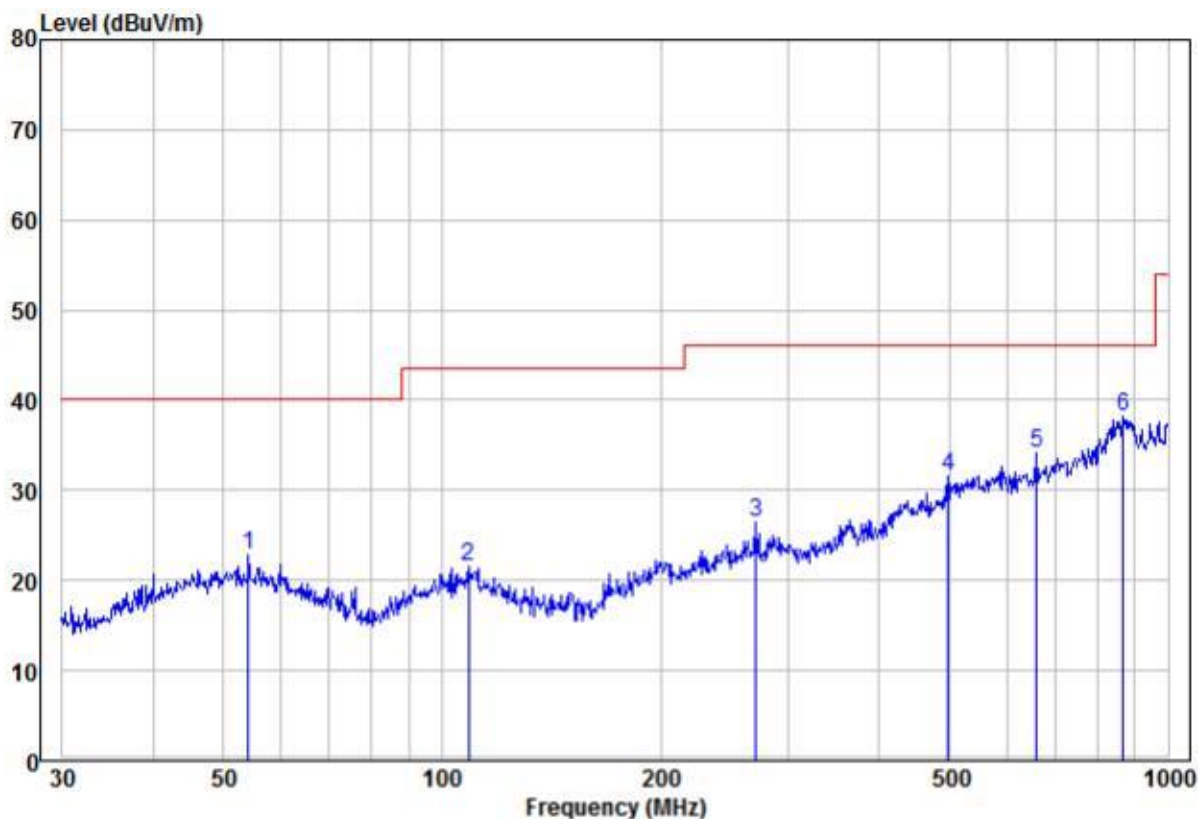

	Read Freq	Level	Factor	Limit Level	Over Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	54.07	23.03	-0.19	22.84	40.00	-17.16	Peak	VERTICAL
2	108.65	21.47	0.00	21.47	43.50	-22.03	Peak	VERTICAL
3	270.37	24.41	2.00	26.41	46.00	-19.59	Peak	VERTICAL
4	497.68	30.56	1.00	31.56	46.00	-14.44	Peak	VERTICAL
5	658.84	33.64	0.50	34.14	46.00	-11.86	Peak	VERTICAL
6 pp	869.13	34.70	3.50	38.20	46.00	-7.80	Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,


Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

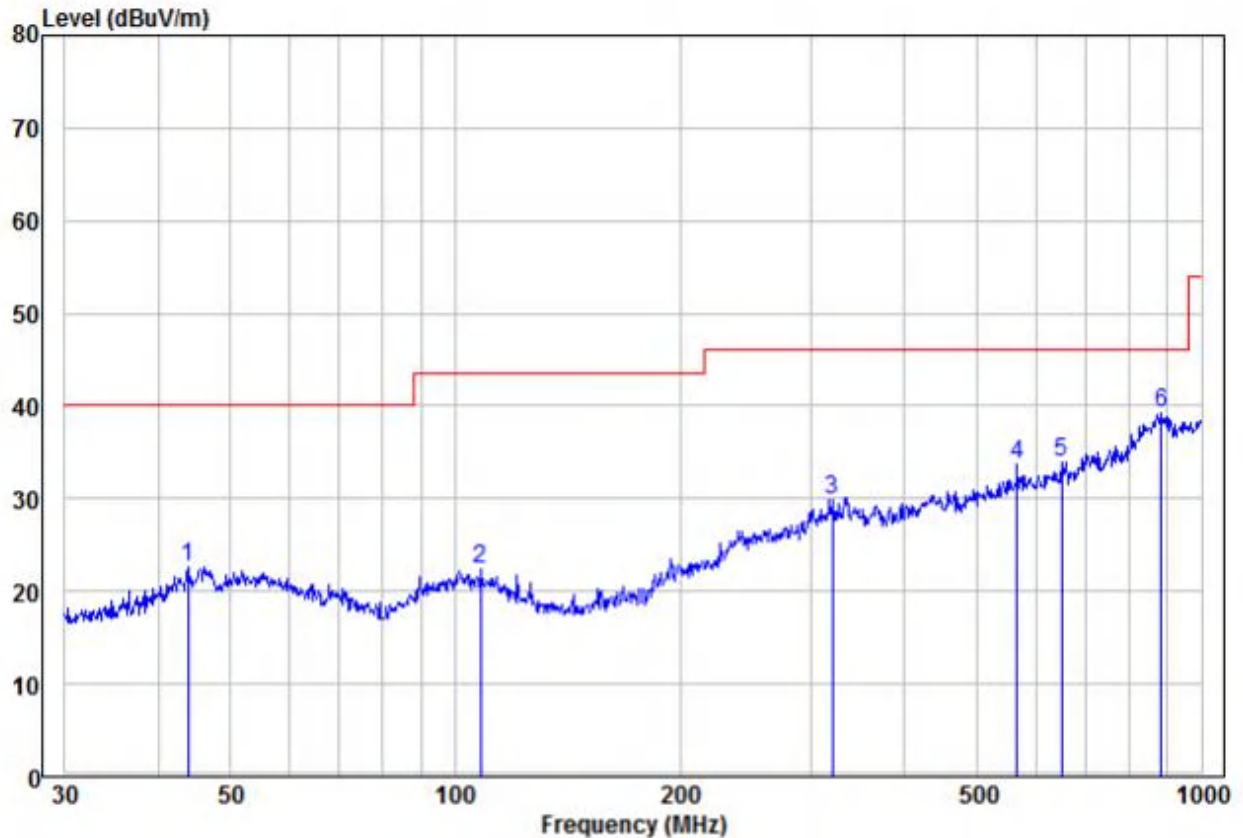

	Read	Limit	Over					
	Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	43.81	24.31	-1.62	22.69	40.00	-17.31	Peak	HORIZONTAL
2	108.27	22.47	0.00	22.47	43.50	-21.03	Peak	HORIZONTAL
3	319.94	27.89	2.00	29.89	46.00	-16.11	Peak	HORIZONTAL
4	566.62	32.62	1.00	33.62	46.00	-12.38	Peak	HORIZONTAL
5	649.66	33.34	0.50	33.84	46.00	-12.16	Peak	HORIZONTAL
6 pp	884.50	35.70	3.50	39.20	46.00	-6.80	Peak	HORIZONTAL

9#: 30MHz~1GHz		
Test mode:	Transmitting	Vertical

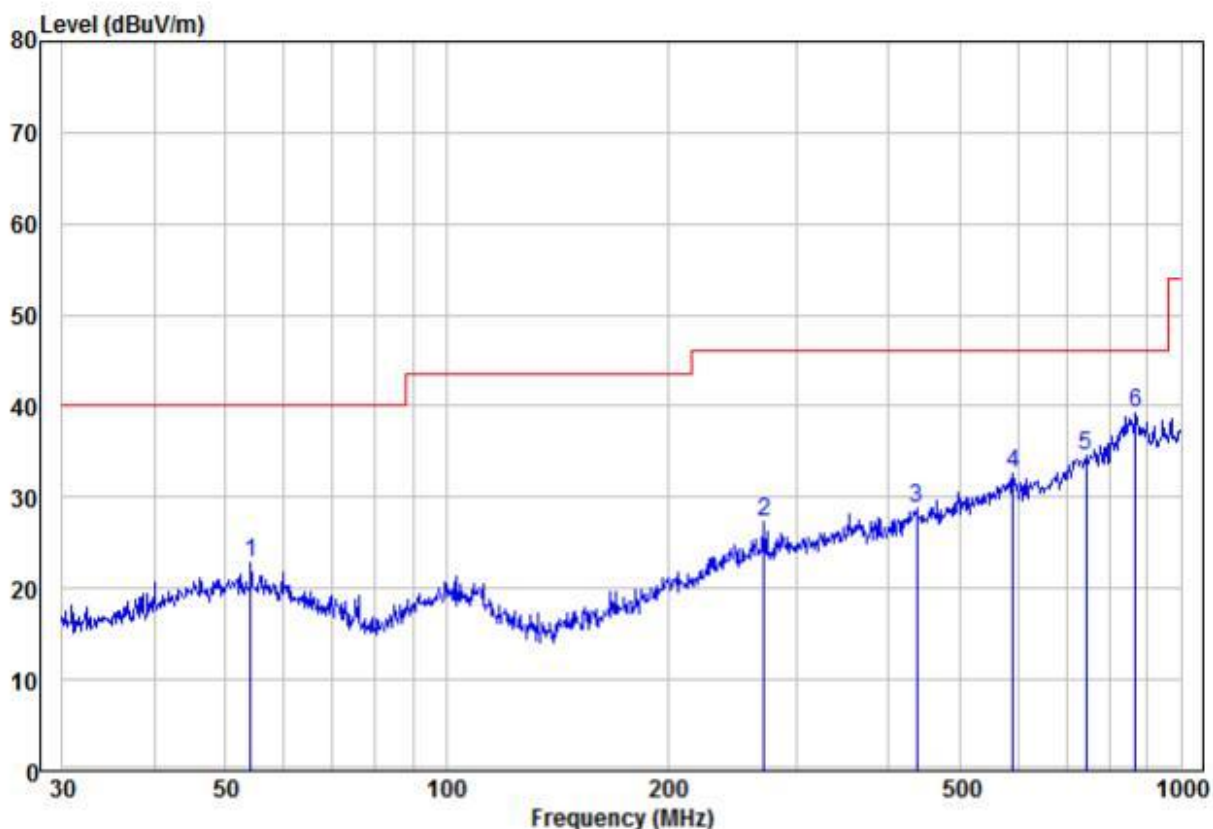

	Read		Limit	Over			
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	54.07	23.03	-0.19	22.84	40.00	-17.16 Peak	VERTICAL
2	270.37	25.41	2.00	27.41	46.00	-18.59 Peak	VERTICAL
3	437.12	27.88	1.00	28.88	46.00	-17.12 Peak	VERTICAL
4	590.97	32.14	0.50	32.64	46.00	-13.36 Peak	VERTICAL
5	742.26	33.36	1.23	34.59	46.00	-11.41 Peak	VERTICAL
6 pp	869.13	35.70	3.50	39.20	46.00	-6.80 Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

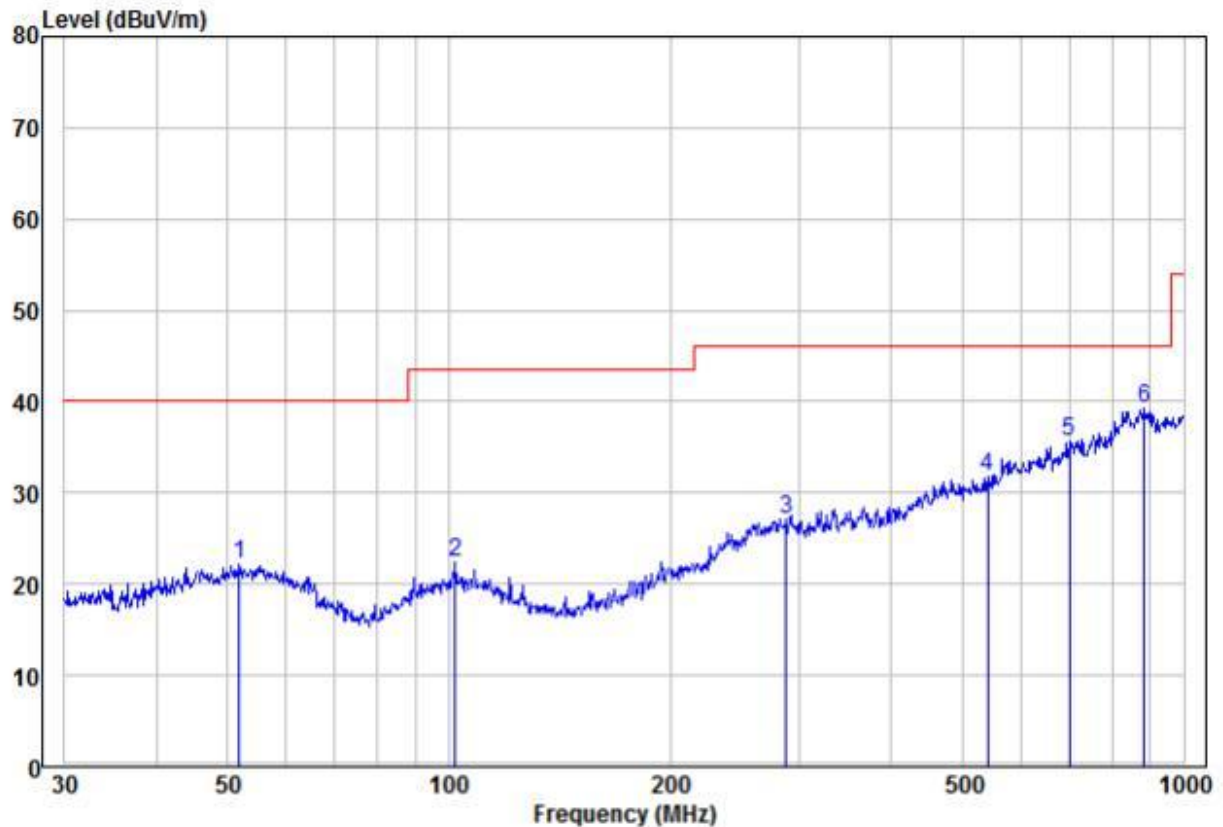

	Read		Limit	Over			
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	51.84	22.75	-0.63	22.12	40.00	-17.88 Peak	HORIZONTAL
2	102.00	22.35	0.00	22.35	43.50	-21.15 Peak	HORIZONTAL
3	287.99	25.13	2.00	27.13	46.00	-18.87 Peak	HORIZONTAL
4	541.37	30.81	1.00	31.81	46.00	-14.19 Peak	HORIZONTAL
5	699.30	34.72	1.00	35.72	46.00	-10.28 Peak	HORIZONTAL
6 pp	884.50	35.70	3.50	39.20	46.00	-6.80 Peak	HORIZONTAL


10#:

30MHz~1GHz

Test mode:

Transmitting

Vertical

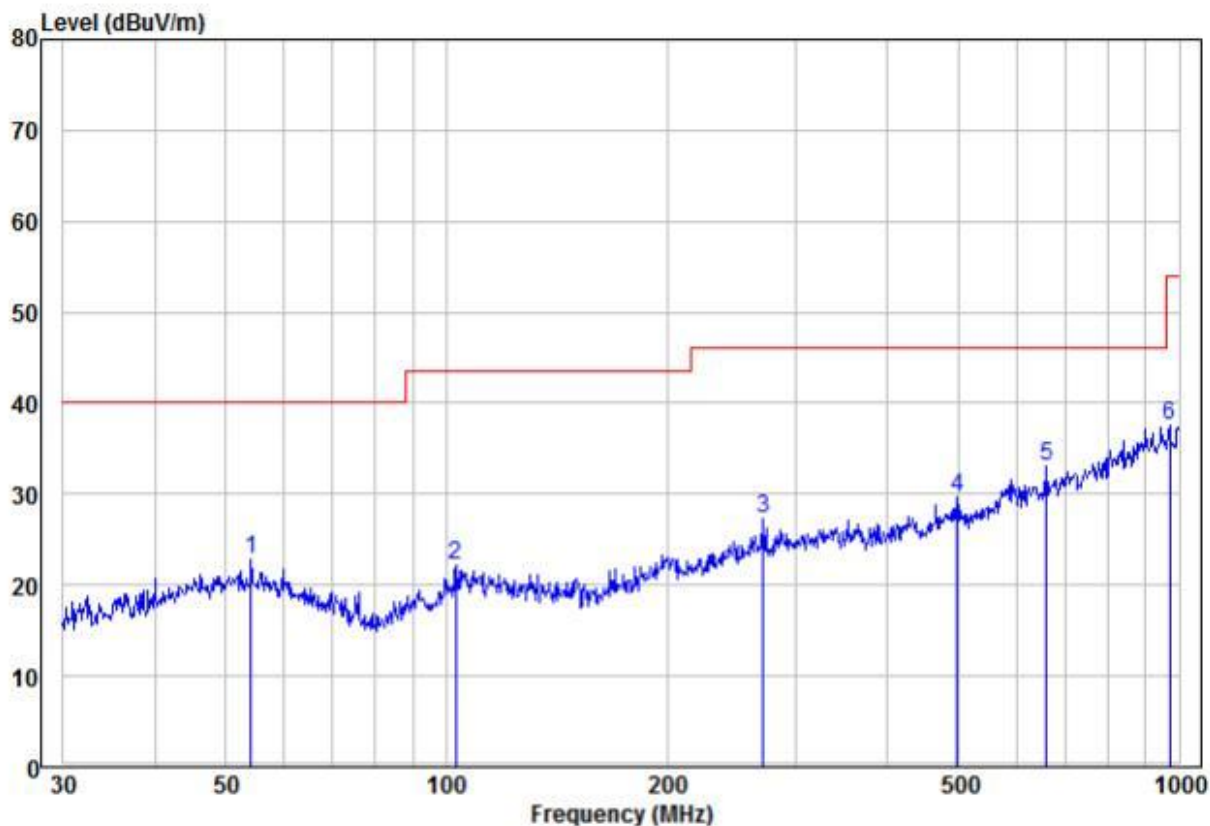

	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	54.07	23.03	-0.19	22.84	40.00	-17.16 Peak	VERTICAL
2	103.08	22.28	0.00	22.28	43.50	-21.22 Peak	VERTICAL
3	270.37	25.41	2.00	27.41	46.00	-18.59 Peak	VERTICAL
4	497.68	28.56	1.00	29.56	46.00	-16.44 Peak	VERTICAL
5 pp	658.84	32.64	0.50	33.14	46.00	-12.86 Peak	VERTICAL
6	972.34	35.55	2.00	37.55	54.00	-16.45 Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,


Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

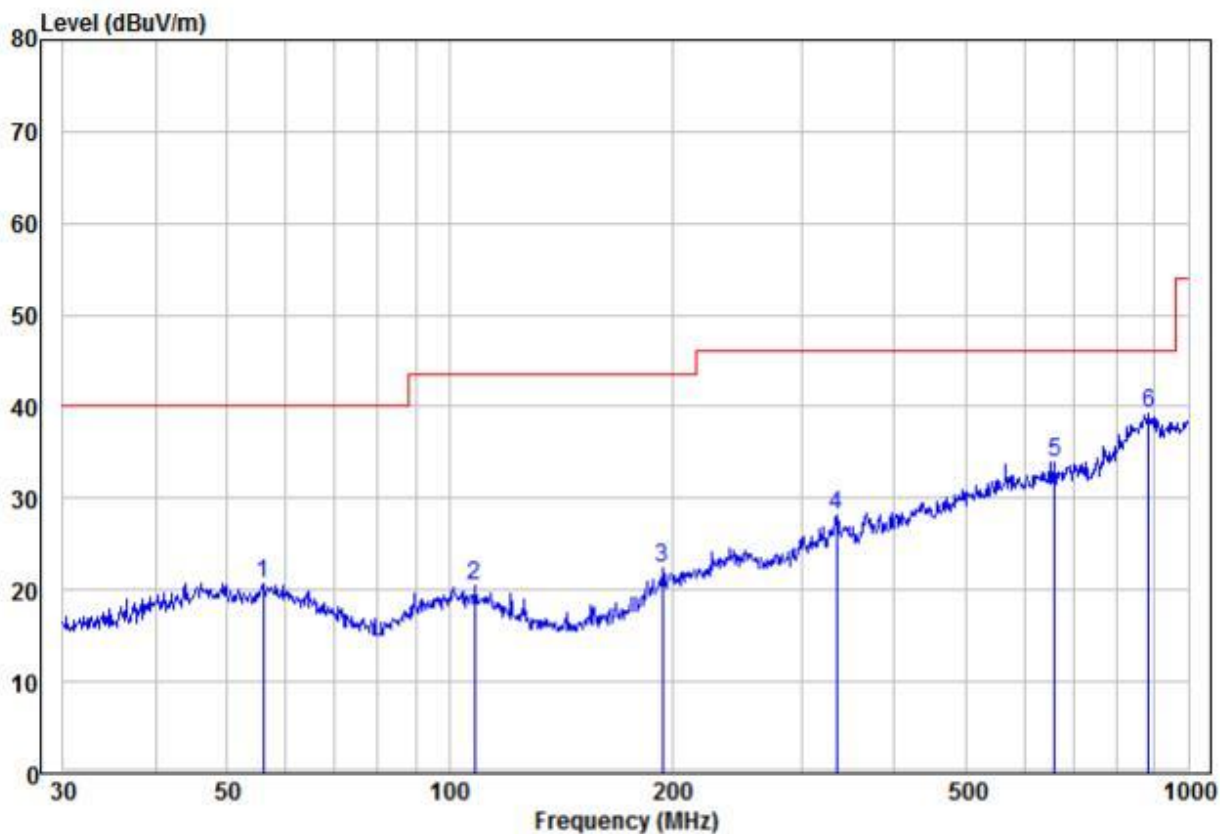

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	56.00	20.59	0.00	20.59	40.00	-19.41	Peak	HORIZONTAL
2	108.27	20.47	0.00	20.47	43.50	-23.03	Peak	HORIZONTAL
3	194.45	22.37	0.00	22.37	43.50	-21.13	Peak	HORIZONTAL
4	333.69	26.11	2.00	28.11	46.00	-17.89	Peak	HORIZONTAL
5	658.84	33.49	0.50	33.99	46.00	-12.01	Peak	HORIZONTAL
6 pp	884.50	35.70	3.50	39.20	46.00	-6.80	Peak	HORIZONTAL

11#: 30MHz~1GHz		
Test mode:	Transmitting	Vertical

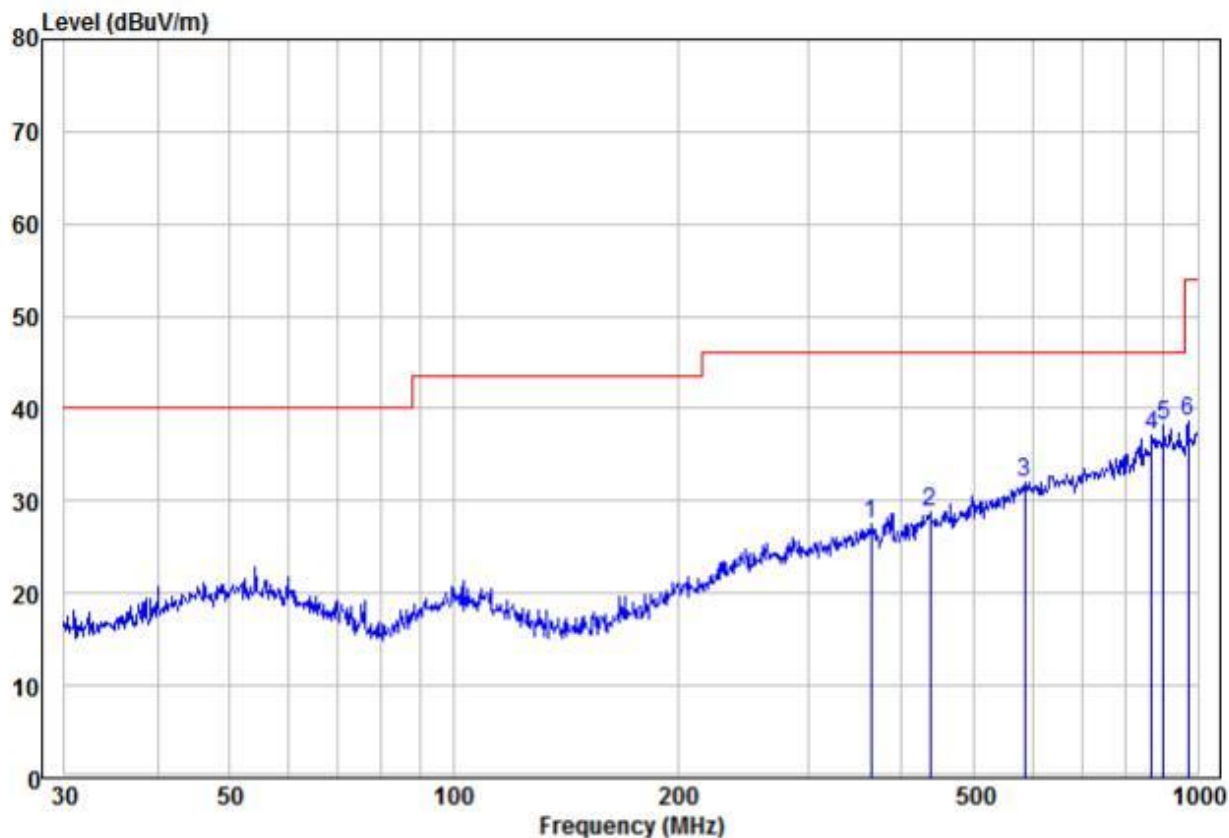

	Read Freq	Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	364.26	25.60	2.00	27.60	46.00	-18.40	Peak	VERTICAL
2	437.12	27.88	1.00	28.88	46.00	-17.12	Peak	VERTICAL
3	584.79	31.50	0.50	32.00	46.00	-14.00	Peak	VERTICAL
4	869.13	33.70	3.50	37.20	46.00	-8.80	Peak	VERTICAL
5 pp	900.15	35.17	2.99	38.16	46.00	-7.84	Peak	VERTICAL
6	972.34	36.55	2.00	38.55	54.00	-15.45	Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

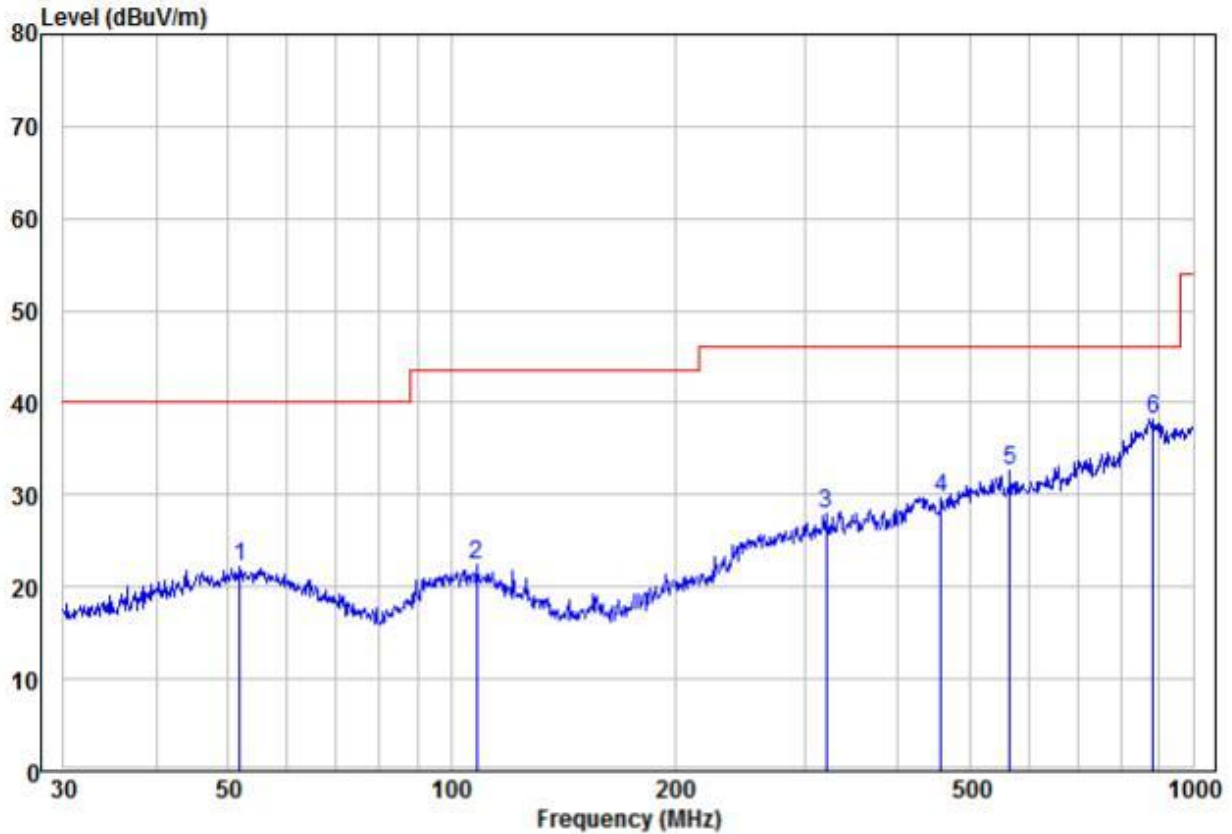

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	51.84	22.75	-0.63	22.12	40.00	-17.88	Peak	HORIZONTAL
2	108.27	22.47	0.00	22.47	43.50	-21.03	Peak	HORIZONTAL
3	319.94	25.89	2.00	27.89	46.00	-18.11	Peak	HORIZONTAL
4	457.51	28.74	1.00	29.74	46.00	-16.26	Peak	HORIZONTAL
5	566.62	31.62	1.00	32.62	46.00	-13.38	Peak	HORIZONTAL
6 pp	884.50	34.70	3.50	38.20	46.00	-7.80	Peak	HORIZONTAL


12#:

30MHz~1GHz

Test mode:

Transmitting

Vertical

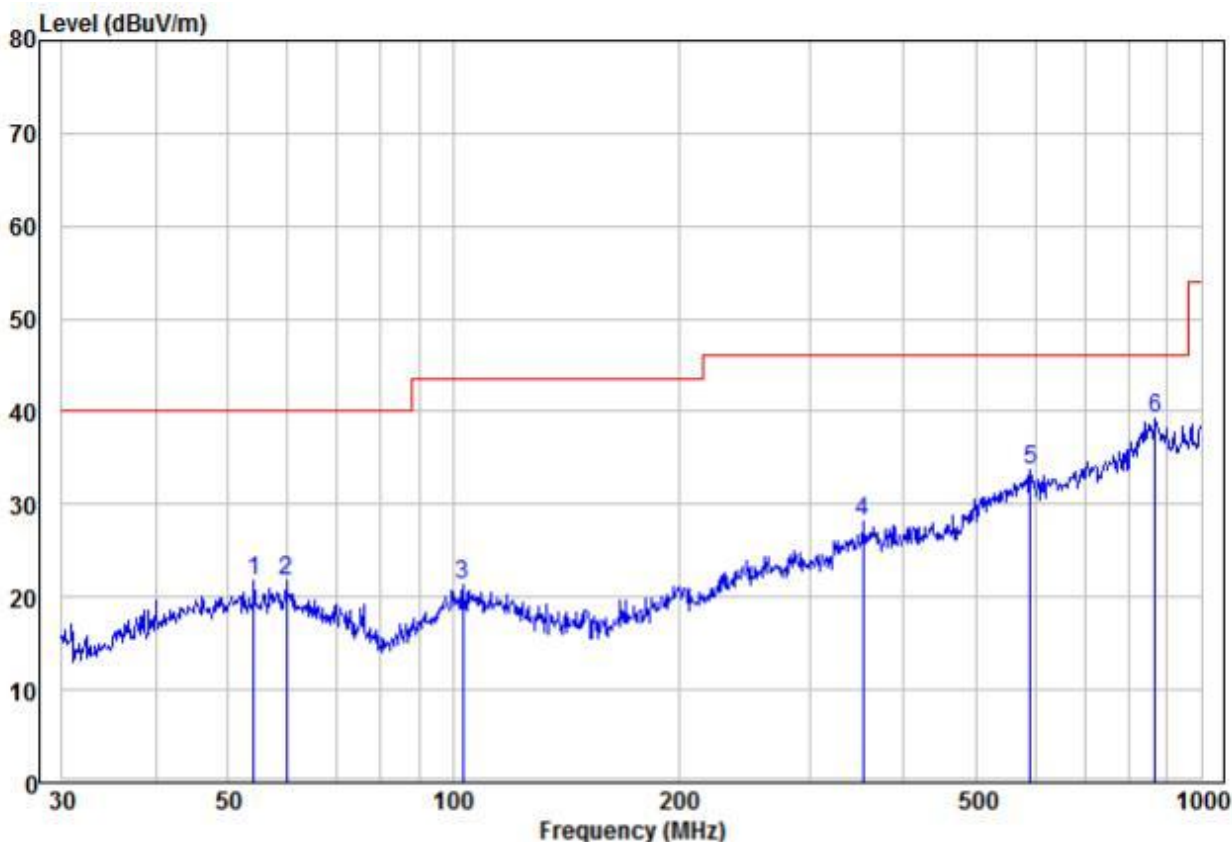

	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	54.07	22.03	-0.19	21.84	40.00	-18.16 Peak	VERTICAL
2	59.86	21.65	0.00	21.65	40.00	-18.35 Peak	VERTICAL
3	103.08	21.28	0.00	21.28	43.50	-22.22 Peak	VERTICAL
4	352.94	26.11	2.00	28.11	46.00	-17.89 Peak	VERTICAL
5	590.97	33.14	0.50	33.64	46.00	-12.36 Peak	VERTICAL
6 pp	869.13	35.70	3.50	39.20	46.00	-6.80 Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

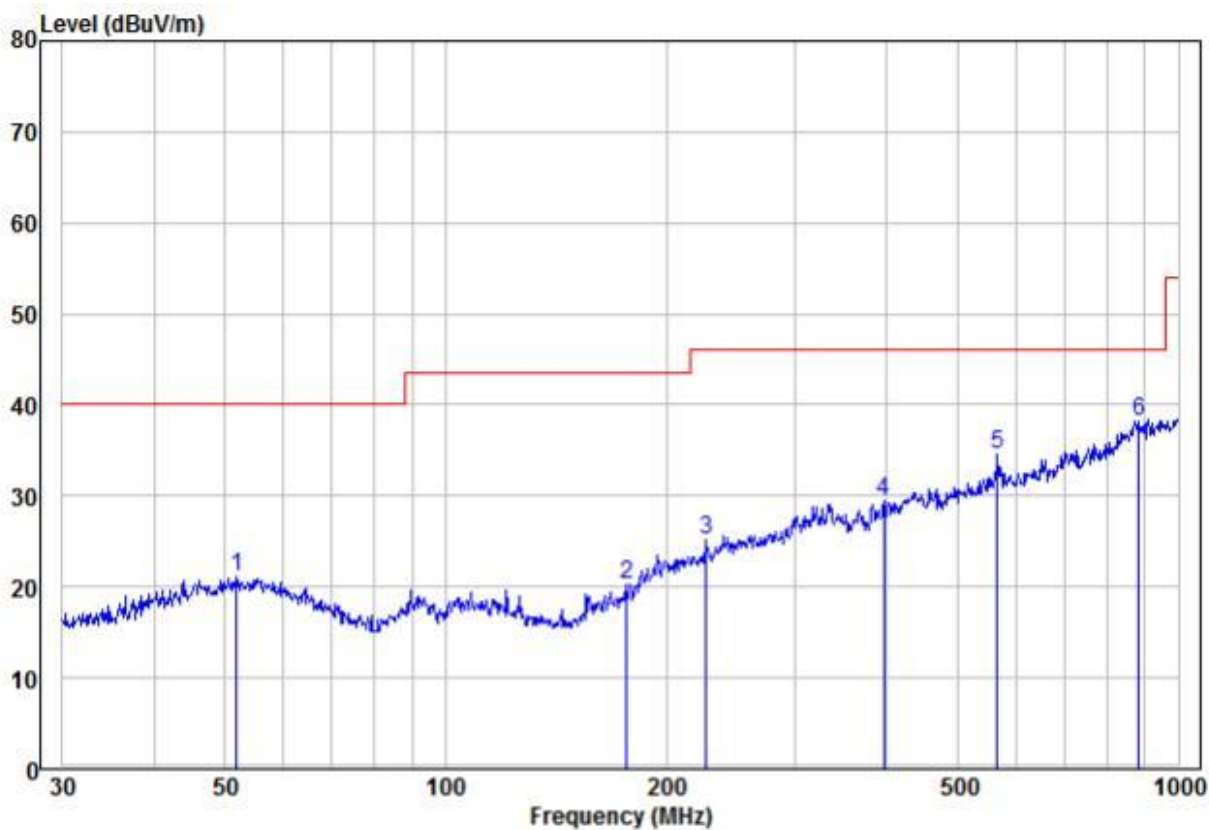

	Read Freq	Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	51.84	21.75	-0.63	21.12	40.00	-18.88	Peak	HORIZONTAL
2	176.89	20.21	0.00	20.21	43.50	-23.29	Peak	HORIZONTAL
3	226.89	24.52	0.69	25.21	46.00	-20.79	Peak	HORIZONTAL
4	396.24	28.43	1.00	29.43	46.00	-16.57	Peak	HORIZONTAL
5	566.62	33.62	1.00	34.62	46.00	-11.38	Peak	HORIZONTAL
6 pp	884.50	34.70	3.50	38.20	46.00	-7.80	Peak	HORIZONTAL


13#:

30MHz~1GHz

Test mode:

Transmitting

Vertical

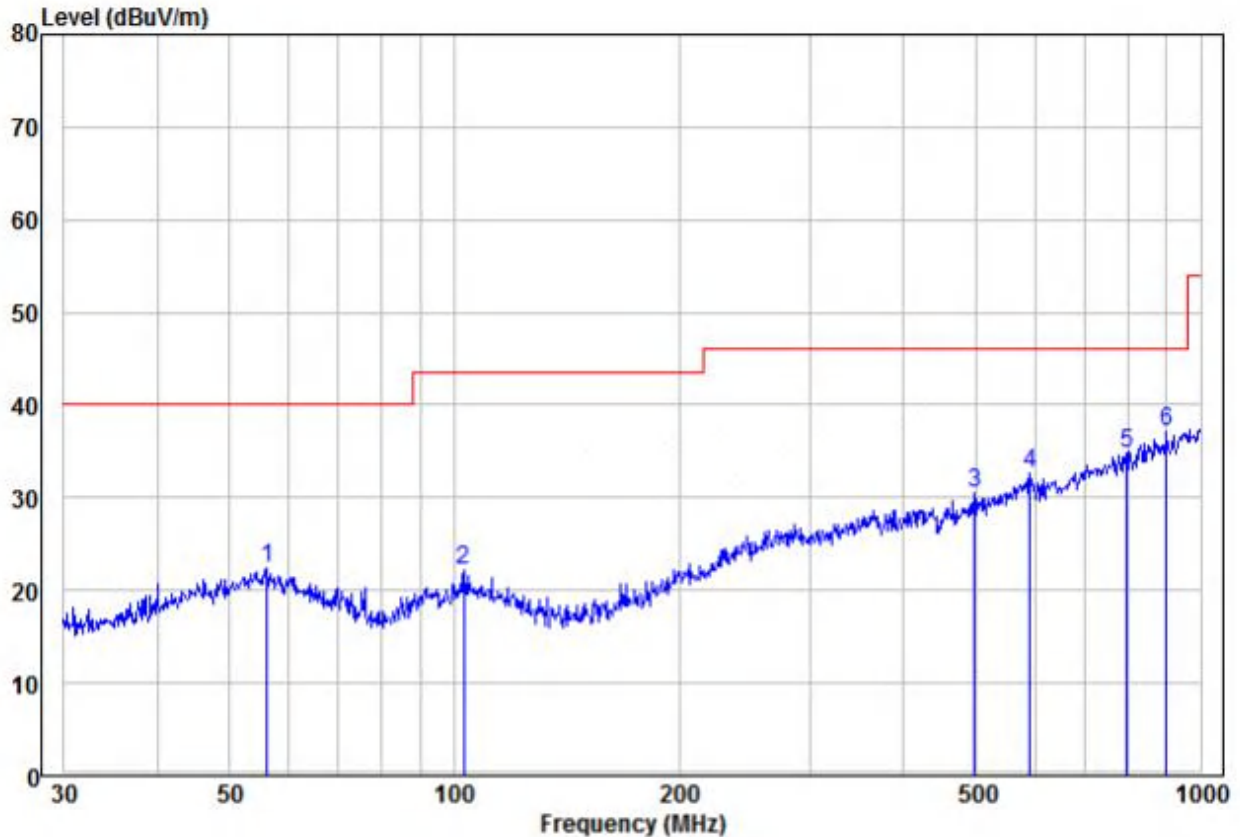

	Read Freq	Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	56.20	22.31	0.00	22.31	40.00	-17.69	Peak	VERTICAL
2	103.08	22.28	0.00	22.28	43.50	-21.22	Peak	VERTICAL
3	497.68	29.56	1.00	30.56	46.00	-15.44	Peak	VERTICAL
4	590.97	32.14	0.50	32.64	46.00	-13.36	Peak	VERTICAL
5	796.18	33.37	1.50	34.87	46.00	-11.13	Peak	VERTICAL
6 pp	900.15	34.17	2.99	37.16	46.00	-8.84	Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

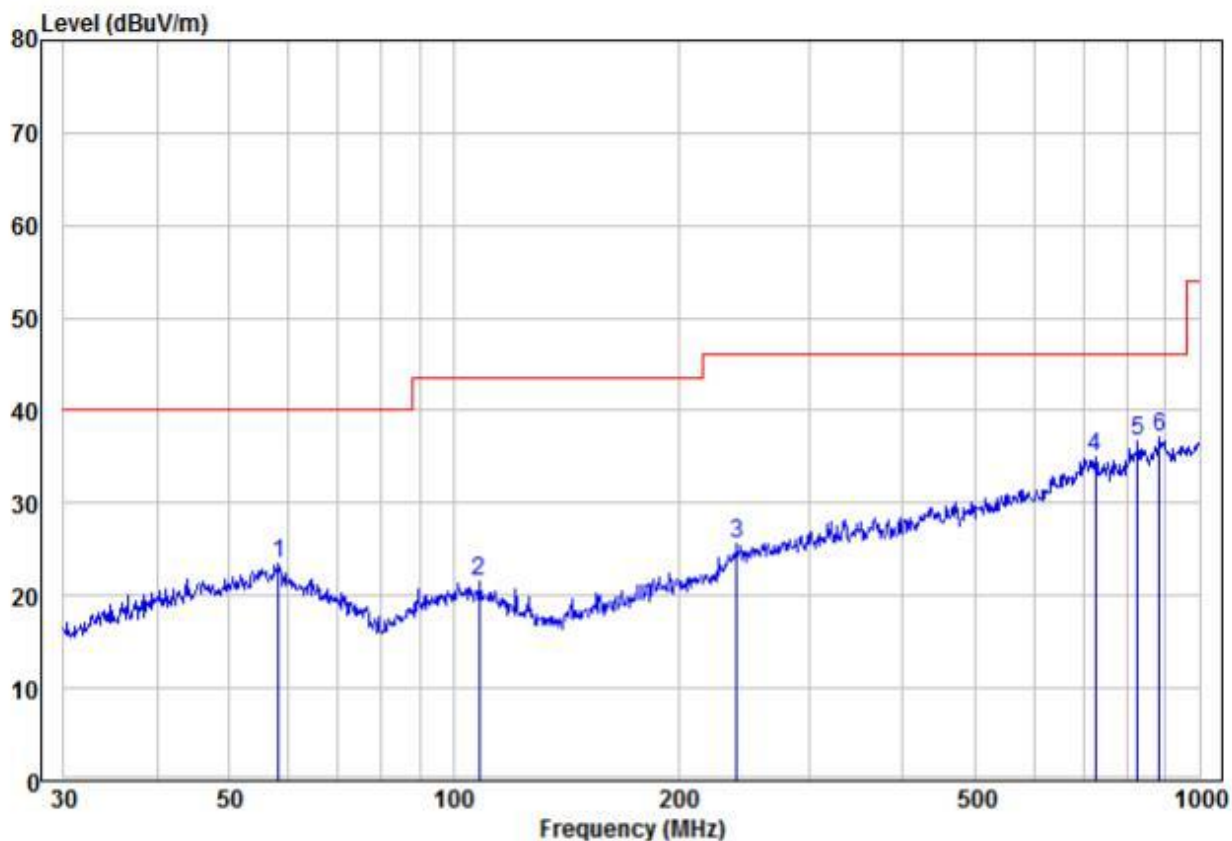

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	58.20	23.40	0.00	23.40	40.00	-16.60	Peak	HORIZONTAL
2	108.27	21.47	0.00	21.47	43.50	-22.03	Peak	HORIZONTAL
3	239.99	23.76	1.80	25.56	46.00	-20.44	Peak	HORIZONTAL
4	724.26	33.93	1.00	34.93	46.00	-11.07	Peak	HORIZONTAL
5	827.49	33.73	3.00	36.73	46.00	-9.27	Peak	HORIZONTAL
6 pp	884.50	33.70	3.50	37.20	46.00	-8.80	Peak	HORIZONTAL


14#:

30MHz~1GHz

Test mode:

Transmitting

Vertical

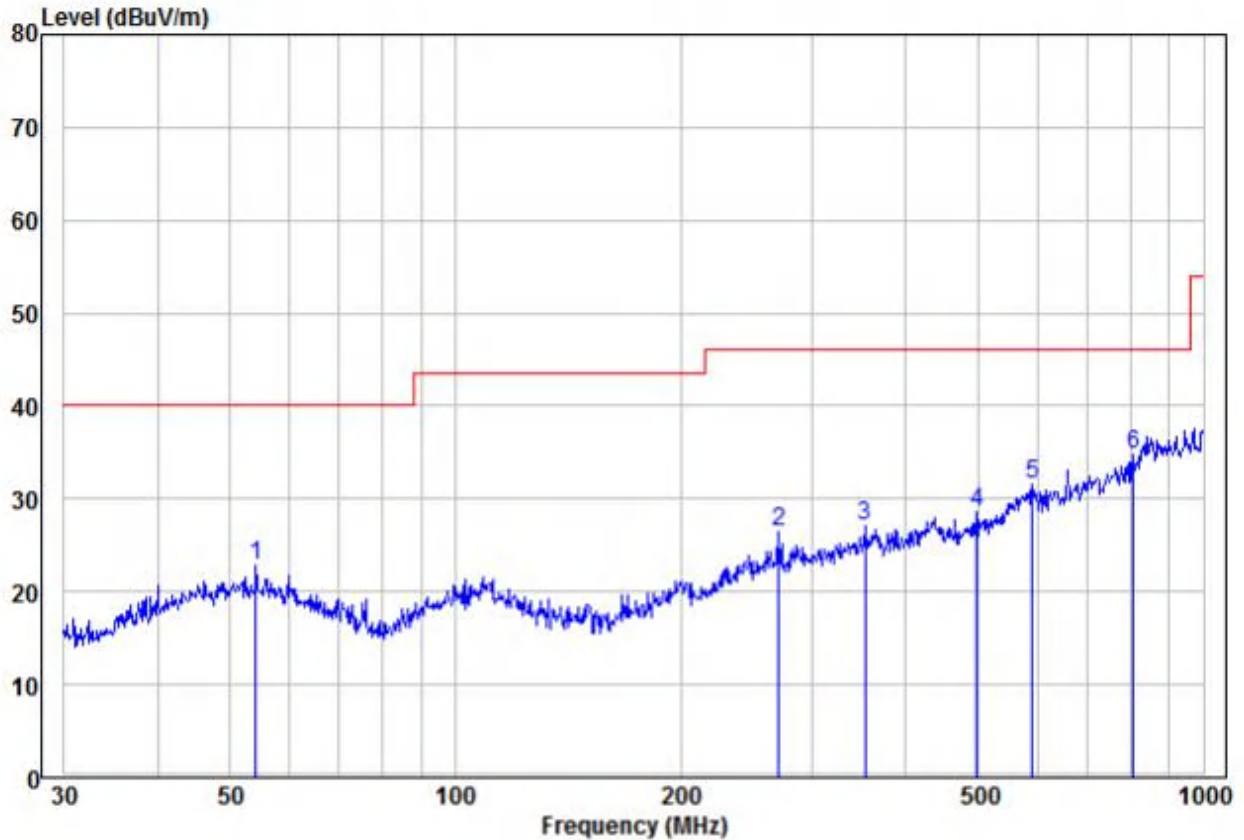

	Read Freq	Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	54.07	23.03	-0.19	22.84	40.00	-17.16	Peak	VERTICAL
2	270.37	24.41	2.00	26.41	46.00	-19.59	Peak	VERTICAL
3	352.94	25.11	2.00	27.11	46.00	-18.89	Peak	VERTICAL
4	497.68	27.56	1.00	28.56	46.00	-17.44	Peak	VERTICAL
5	590.97	31.14	0.50	31.64	46.00	-14.36	Peak	VERTICAL
6 pp	807.43	32.20	2.50	34.70	46.00	-11.30	Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

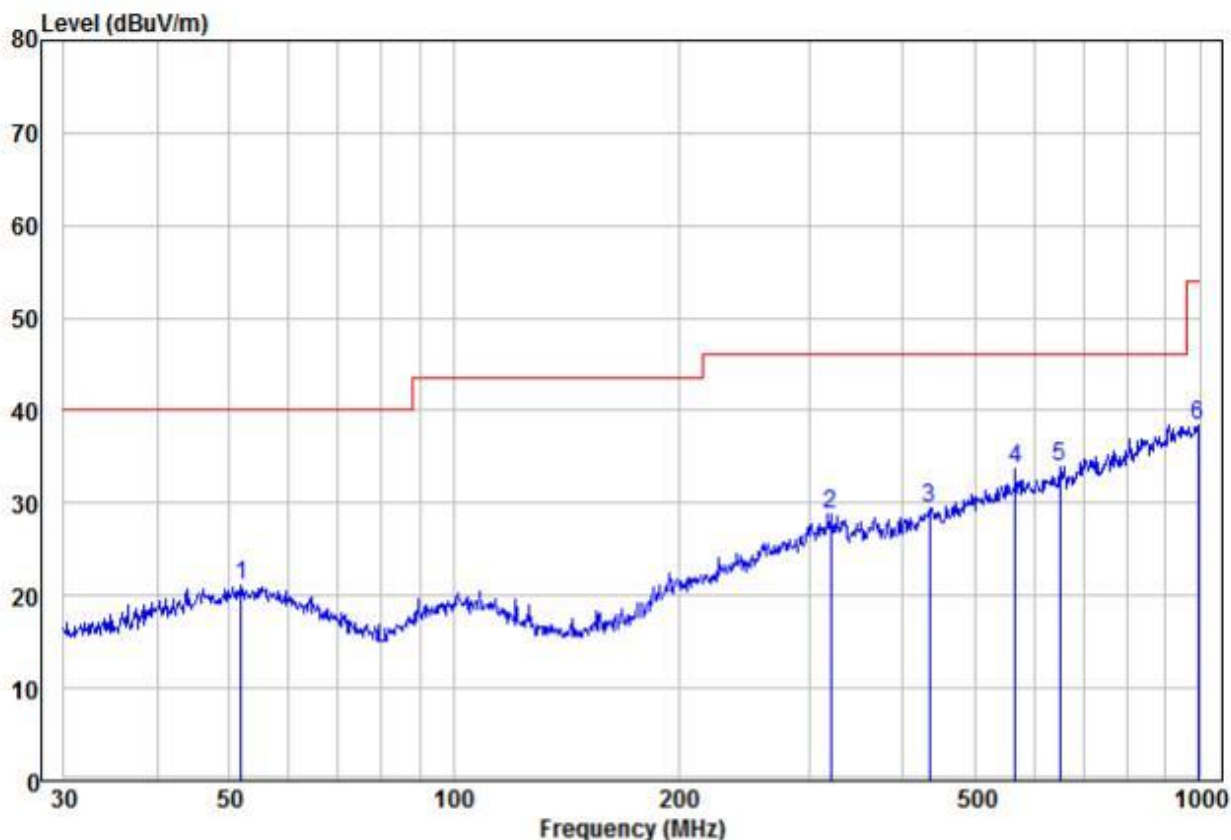

	Read Freq	Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	51.84	21.75	-0.63	21.12	40.00	-18.88	Peak	HORIZONTAL
2	319.94	26.89	2.00	28.89	46.00	-17.11	Peak	HORIZONTAL
3	434.07	28.36	1.00	29.36	46.00	-16.64	Peak	HORIZONTAL
4	566.62	32.62	1.00	33.62	46.00	-12.38	Peak	HORIZONTAL
5 pp	649.66	33.34	0.50	33.84	46.00	-12.16	Peak	HORIZONTAL
6	996.50	36.42	2.00	38.42	54.00	-15.58	Peak	HORIZONTAL


15#:

30MHz~1GHz

Test mode:

Transmitting

Vertical

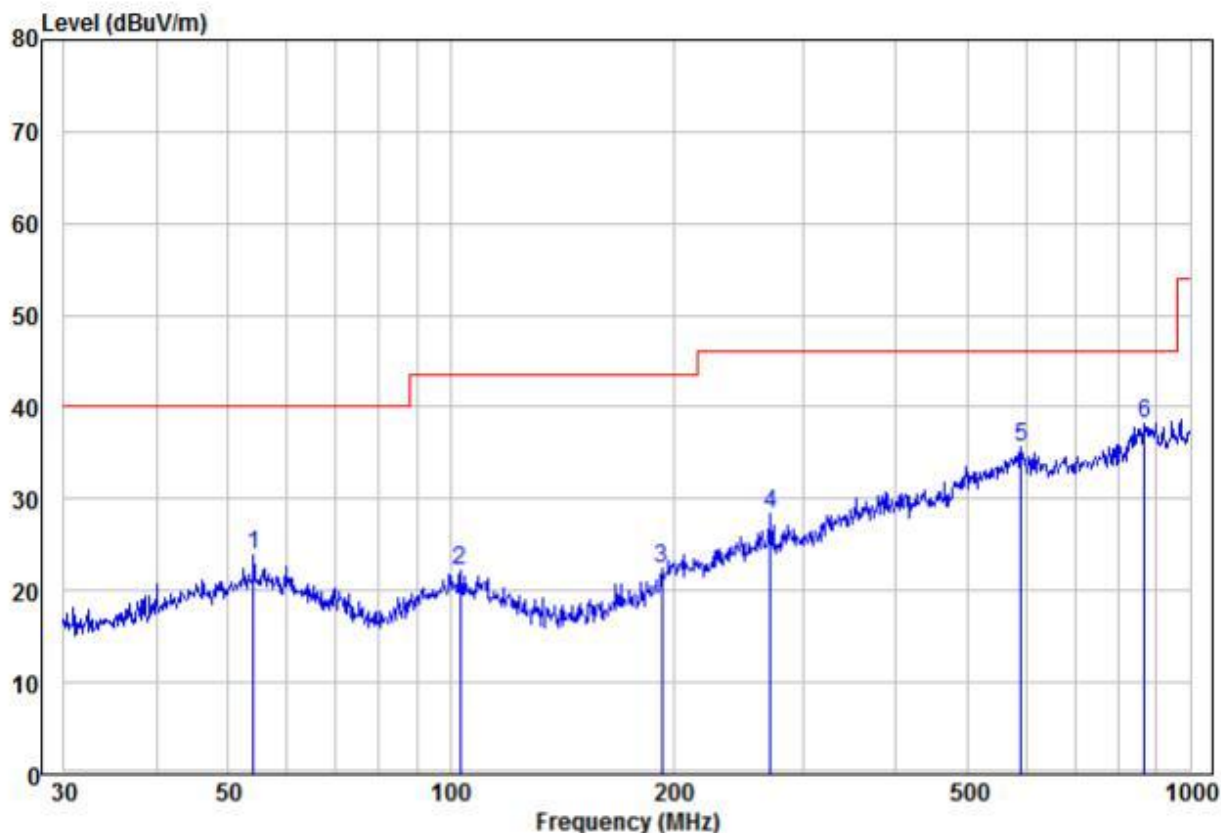

	Read	Limit	Over				
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	54.07	24.03	-0.19	23.84	40.00	-16.16 Peak	VERTICAL
2	103.08	22.28	0.00	22.28	43.50	-21.22 Peak	VERTICAL
3	193.09	22.37	0.00	22.37	43.50	-21.13 Peak	VERTICAL
4	270.37	26.41	2.00	28.41	46.00	-17.59 Peak	VERTICAL
5	590.97	35.14	0.50	35.64	46.00	-10.36 Peak	VERTICAL
6 pp	869.13	34.70	3.50	38.20	46.00	-7.80 Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

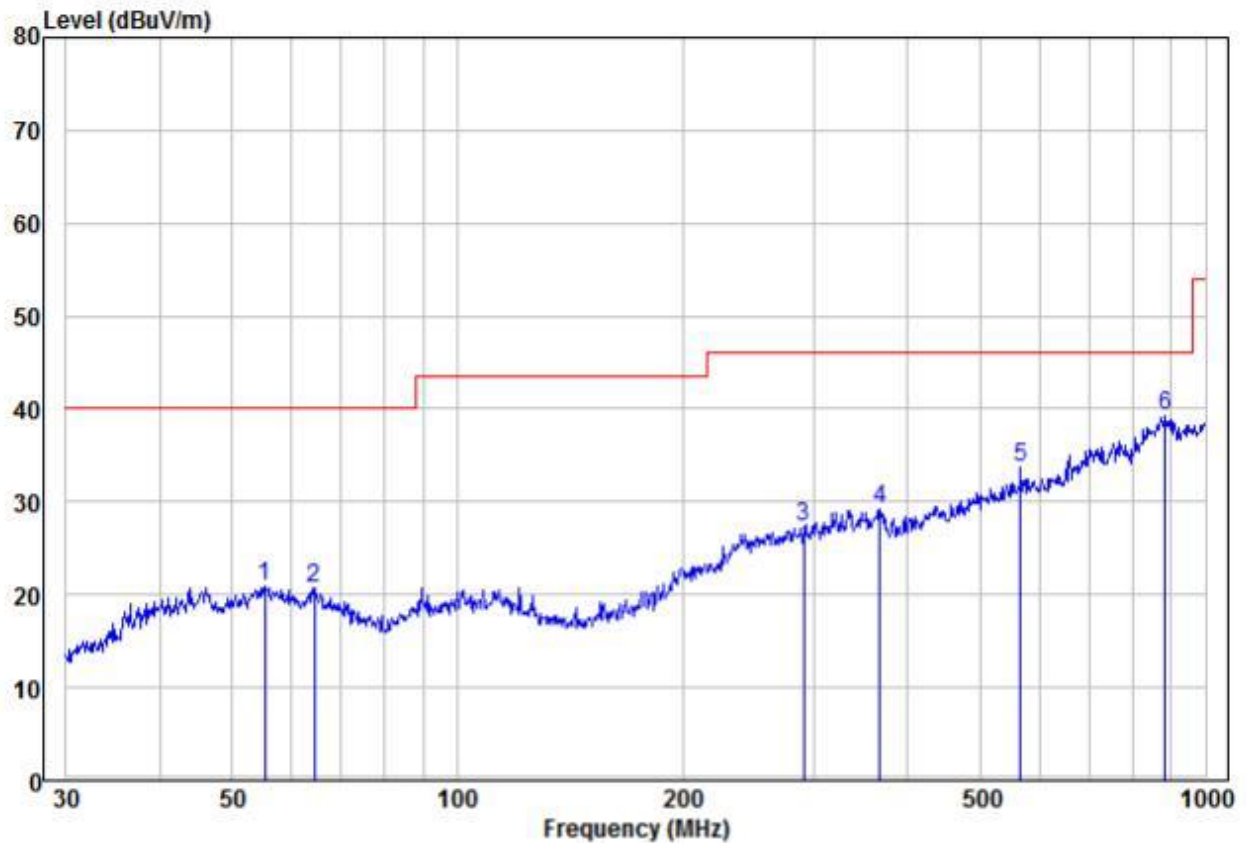

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	55.22	20.90	0.00	20.90	40.00	-19.10	Peak	HORIZONTAL
2	64.43	20.76	0.00	20.76	40.00	-19.24	Peak	HORIZONTAL
3	290.02	25.33	2.00	27.33	46.00	-18.67	Peak	HORIZONTAL
4	366.82	27.30	2.00	29.30	46.00	-16.70	Peak	HORIZONTAL
5	566.62	32.62	1.00	33.62	46.00	-12.38	Peak	HORIZONTAL
6 pp	884.50	35.70	3.50	39.20	46.00	-6.80	Peak	HORIZONTAL


16#:

30MHz~1GHz

Test mode:

Transmitting

Vertical

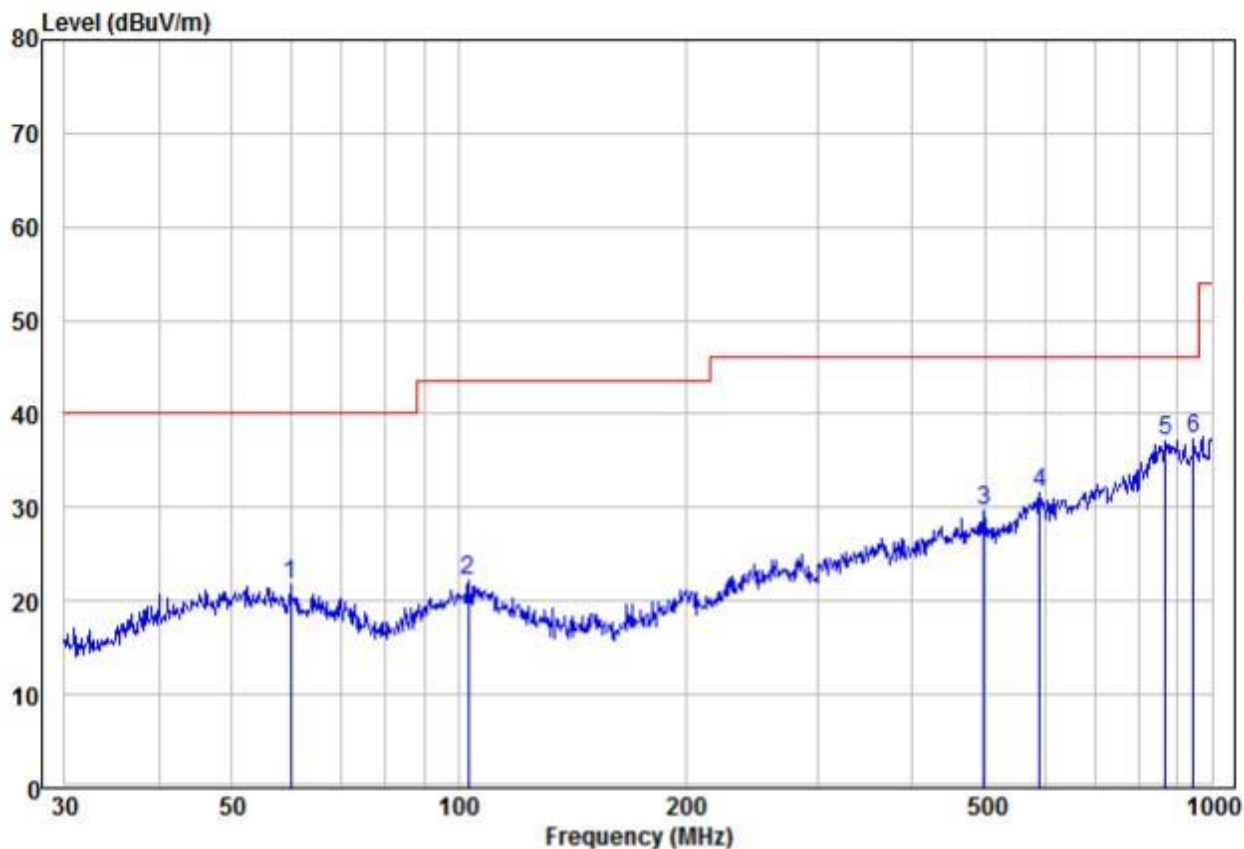

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	59.86	21.65	0.00	21.65	40.00	-18.35	Peak	VERTICAL
2	103.08	22.28	0.00	22.28	43.50	-21.22	Peak	VERTICAL
3	497.68	28.56	1.00	29.56	46.00	-16.44	Peak	VERTICAL
4	590.97	31.14	0.50	31.64	46.00	-14.36	Peak	VERTICAL
5	869.13	33.70	3.50	37.20	46.00	-8.80	Peak	VERTICAL
6 pp	945.44	35.31	2.00	37.31	46.00	-8.69	Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

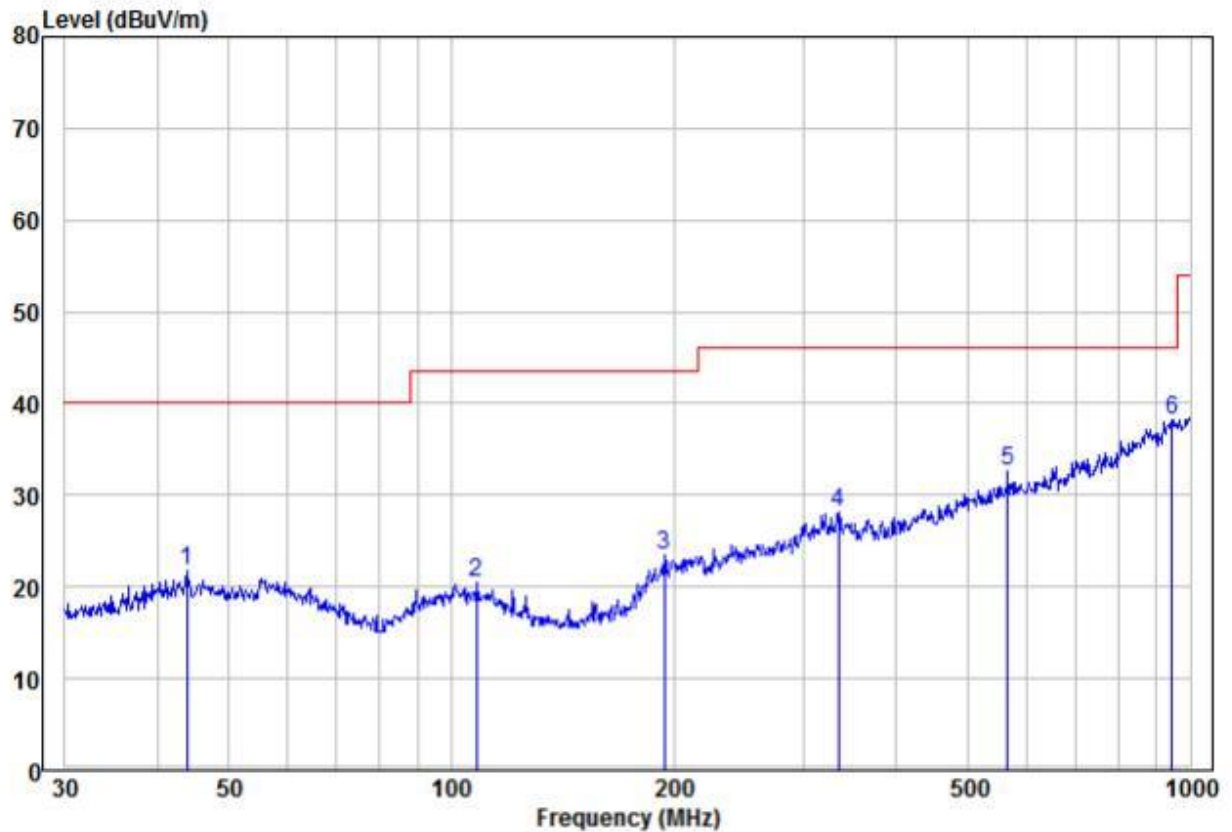

	Read Freq	Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	43.81	23.31	-1.62	21.69	40.00	-18.31	Peak	HORIZONTAL
2	108.27	20.47	0.00	20.47	43.50	-23.03	Peak	HORIZONTAL
3	194.45	23.37	0.00	23.37	43.50	-20.13	Peak	HORIZONTAL
4	333.69	26.11	2.00	28.11	46.00	-17.89	Peak	HORIZONTAL
5	566.62	31.62	1.00	32.62	46.00	-13.38	Peak	HORIZONTAL
6 pp	945.44	36.16	2.00	38.16	46.00	-7.84	Peak	HORIZONTAL


17#:

30MHz~1GHz

Test mode:

Transmitting

Vertical

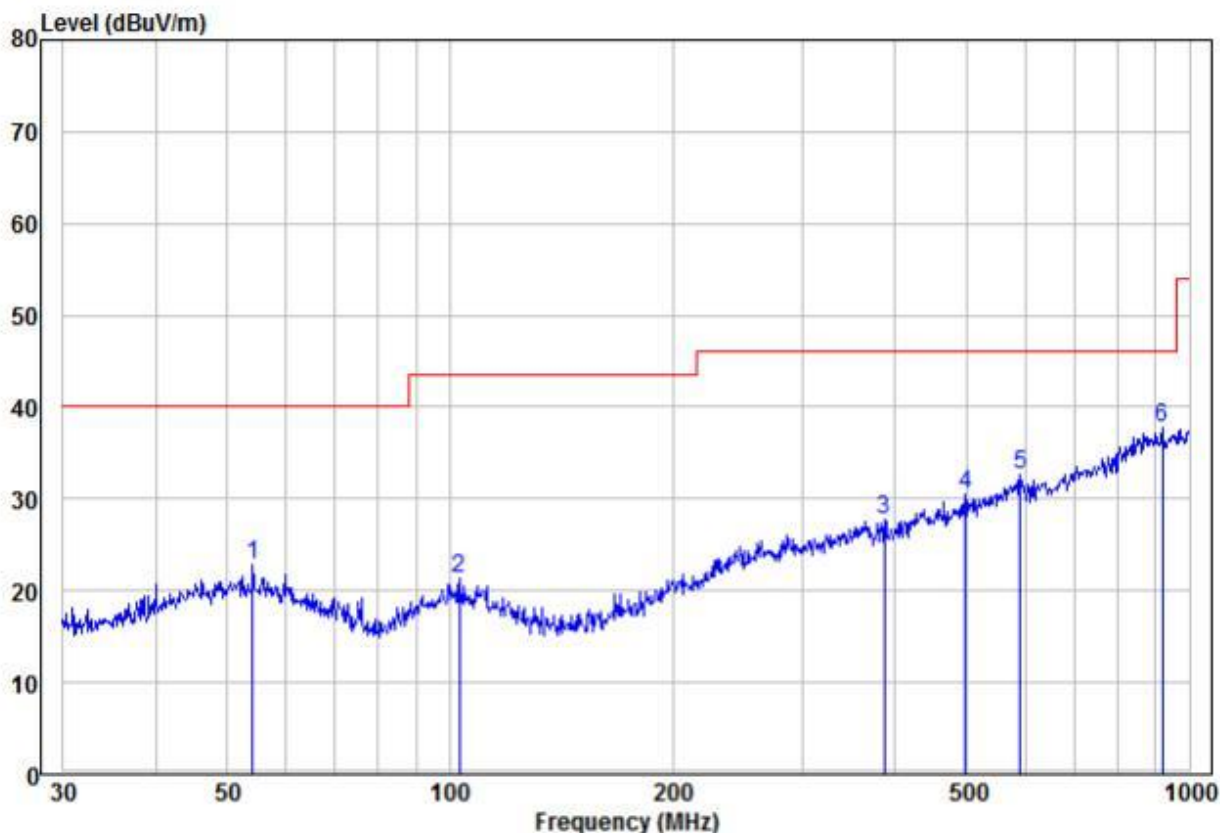

	Read		Limit	Over			
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	54.07	23.03	-0.19	22.84	40.00	-17.16 Peak	VERTICAL
2	103.08	21.28	0.00	21.28	43.50	-22.22 Peak	VERTICAL
3	386.63	26.64	1.00	27.64	46.00	-18.36 Peak	VERTICAL
4	497.68	29.56	1.00	30.56	46.00	-15.44 Peak	VERTICAL
5	590.97	32.14	0.50	32.64	46.00	-13.36 Peak	VERTICAL
6 pp	919.29	35.68	2.00	37.68	46.00	-8.32 Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,


Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

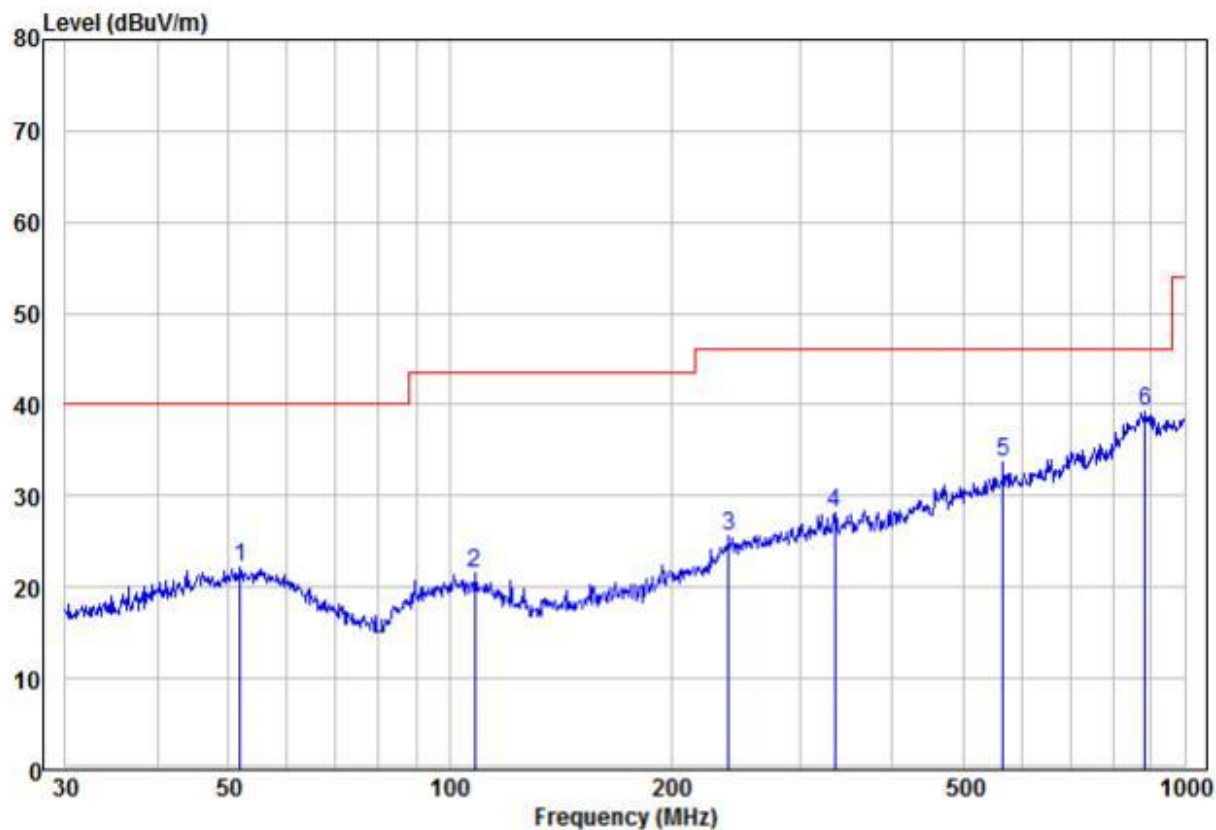

	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	51.84	22.75	-0.63	22.12	40.00	-17.88 Peak	HORIZONTAL
2	108.27	21.47	0.00	21.47	43.50	-22.03 Peak	HORIZONTAL
3	239.99	23.76	1.80	25.56	46.00	-20.44 Peak	HORIZONTAL
4	333.69	26.11	2.00	28.11	46.00	-17.89 Peak	HORIZONTAL
5	566.62	32.62	1.00	33.62	46.00	-12.38 Peak	HORIZONTAL
6 pp	884.50	35.70	3.50	39.20	46.00	-6.80 Peak	HORIZONTAL

18#: 30MHz~1GHz		
Test mode:	Transmitting	Vertical

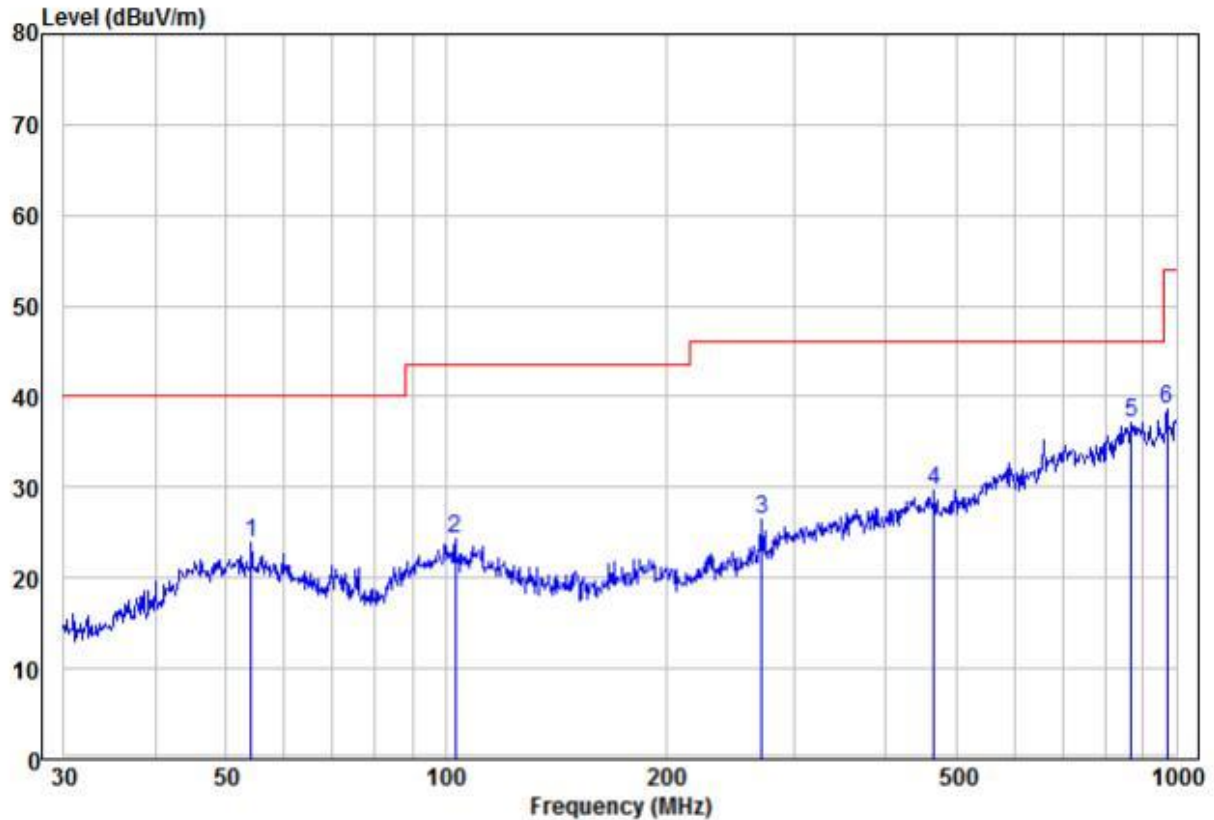

	Read Freq	Level	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	54.07	24.03	-0.19	23.84	40.00	-16.16	Peak	VERTICAL
2	103.08	24.28	0.00	24.28	43.50	-19.22	Peak	VERTICAL
3	270.37	24.41	2.00	26.41	46.00	-19.59	Peak	VERTICAL
4	465.60	28.72	1.00	29.72	46.00	-16.28	Peak	VERTICAL
5 pp	869.13	33.70	3.50	37.20	46.00	-8.80	Peak	VERTICAL
6	972.34	36.55	2.00	38.55	54.00	-15.45	Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

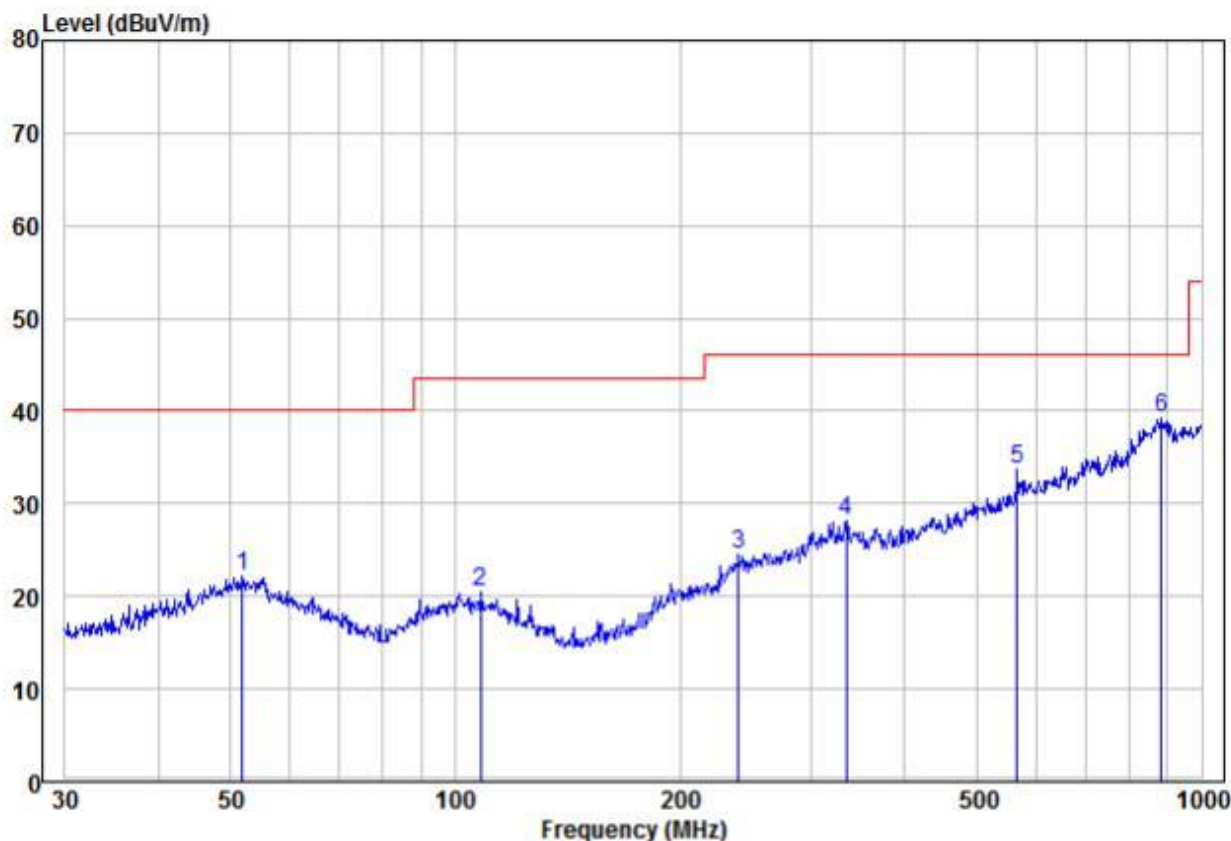

	Read	Limit	Over				
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	51.84	22.75	-0.63	22.12	40.00	-17.88 Peak	HORIZONTAL
2	108.27	20.47	0.00	20.47	43.50	-23.03 Peak	HORIZONTAL
3	239.99	22.76	1.80	24.56	46.00	-21.44 Peak	HORIZONTAL
4	333.69	26.11	2.00	28.11	46.00	-17.89 Peak	HORIZONTAL
5	566.62	32.62	1.00	33.62	46.00	-12.38 Peak	HORIZONTAL
6 pp	884.50	35.70	3.50	39.20	46.00	-6.80 Peak	HORIZONTAL

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

5.8.2 Transmitter emission above 1GHz

Test mode:		802.11b(1Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	53.04	-4.26	48.78	74	-25.22	peak	H	1.5	331
4824.000	36.33	-4.26	32.07	54	-21.93	AVG	H	1.5	318
7236.000	51.78	1.18	52.96	74	-21.04	peak	H	1.5	177
7236.000	37.16	1.18	38.34	54	-15.66	AVG	H	1.5	242
4824.000	55.01	-4.26	50.75	74	-23.25	peak	V	1.5	357
4824.000	38.08	-4.26	33.82	54	-20.18	AVG	V	1.5	70
7236.000	50.76	1.18	51.94	74	-22.06	peak	V	1.5	77
7236.000	35.09	1.18	36.27	54	-17.73	AVG	V	1.5	94

Test mode:		802.11b(1Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	51.92	-4.12	47.80	74	-26.20	peak	H	1.5	233
4874.000	36.20	-4.12	32.08	54	-21.92	AVG	H	1.5	281
7311.000	50.24	1.46	51.70	74	-22.30	peak	H	1.5	238
7311.000	35.76	1.46	37.22	54	-16.78	AVG	H	1.5	204
4874.000	53.34	-4.12	49.22	74	-24.78	peak	V	1.5	129
4874.000	37.56	-4.12	33.44	54	-20.56	AVG	V	1.5	2
7311.000	49.78	1.46	51.24	74	-22.76	peak	V	1.5	14
7311.000	35.06	1.46	36.52	54	-17.48	AVG	V	1.5	179

Test mode:		802.11b(1Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)				
4924.000	52.27	-4.03	48.24	74	-25.76	peak	H	1.5	270
4924.000	38.63	-4.03	34.60	54	-19.40	AVG	H	1.5	249
7386.000	49.55	1.66	51.21	74	-22.79	peak	H	1.5	301
7386.000	37.85	1.66	39.51	54	-14.49	AVG	H	1.5	314
4924.000	54.48	-4.03	50.45	74	-23.55	peak	V	1.5	140
4924.000	37.98	-4.03	33.95	54	-20.05	AVG	V	1.5	229
7386.000	50.32	1.66	51.98	74	-22.02	peak	V	1.5	358
7386.000	36.97	1.66	38.63	54	-15.37	AVG	V	1.5	77

Remark:

- 1) The 1Mbps of rate of 802.11b is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	52.73	-4.26	48.47	74	-25.53	peak	H	1.5	122
4824.000	37.33	-4.26	33.07	54	-20.93	AVG	H	1.5	301
7236.000	50.53	1.18	51.71	74	-22.29	peak	H	1.5	35
7236.000	38.18	1.18	39.36	54	-14.64	AVG	H	1.5	45
4824.000	55.93	-4.26	51.67	74	-22.33	peak	V	1.5	293
4824.000	39.74	-4.26	35.48	54	-18.52	AVG	V	1.5	160
7236.000	51.30	1.18	52.48	74	-21.52	peak	V	1.5	85
7236.000	35.60	1.18	36.78	54	-17.22	AVG	V	1.5	136

Test mode:		802.11g(6Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	52.37	-4.12	48.25	74	-25.75	peak	H	1.5	164
4874.000	36.01	-4.12	31.89	54	-22.11	AVG	H	1.5	225
7311.000	48.77	1.46	50.23	74	-23.77	peak	H	1.5	325
7311.000	36.63	1.46	38.09	54	-15.91	AVG	H	1.5	0
4874.000	53.88	-4.12	49.76	74	-24.24	peak	V	1.5	74
4874.000	36.95	-4.12	32.83	54	-21.17	AVG	V	1.5	33
7311.000	48.45	1.46	49.91	74	-24.09	peak	V	1.5	11
7311.000	35.67	1.46	37.13	54	-16.87	AVG	V	1.5	279

Test mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol. H/V	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)			(m)	(Degree)
4924.000	51.50	-4.03	47.47	74	-26.53	peak	H	1.5	231
4924.000	36.99	-4.03	32.96	54	-21.04	AVG	H	1.5	325
7386.000	49.25	1.66	50.91	74	-23.09	peak	H	1.5	75
7386.000	36.53	1.66	38.19	54	-15.81	AVG	H	1.5	41
4924.000	53.48	-4.03	49.45	74	-24.55	peak	V	1.5	225
4924.000	38.03	-4.03	34.00	54	-20.00	AVG	V	1.5	305
7386.000	51.15	1.66	52.81	74	-21.19	peak	V	1.5	280
7386.000	37.71	1.66	39.37	54	-14.63	AVG	V	1.5	62

Remark:

- 1) The 6Mbps of rate of 802.11g is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11n20(6.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	52.71	-4.26	48.45	74	-25.55	peak	H	1.5	231
4824.000	37.21	-4.26	32.95	54	-21.05	AVG	H	1.5	261
7236.000	52.04	1.18	53.22	74	-20.78	peak	H	1.5	337
7236.000	37.98	1.18	39.16	54	-14.84	AVG	H	1.5	3
4824.000	55.25	-4.26	50.99	74	-23.01	peak	V	1.5	14
4824.000	38.62	-4.26	34.36	54	-19.64	AVG	V	1.5	280
7236.000	51.65	1.18	52.83	74	-21.17	peak	V	1.5	213
7236.000	36.79	1.18	37.97	54	-16.03	AVG	V	1.5	142

Test mode:		802.11n20(6.5Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	51.95	-4.12	47.83	74	-26.17	peak	H	1.5	271
4874.000	36.66	-4.12	32.54	54	-21.46	AVG	H	1.5	273
7311.000	48.40	1.46	49.86	74	-24.14	peak	H	1.5	107
7311.000	36.17	1.46	37.63	54	-16.37	AVG	H	1.5	232
4874.000	52.31	-4.12	48.19	74	-25.81	peak	V	1.5	285
4874.000	36.51	-4.12	32.39	54	-21.61	AVG	V	1.5	346
7311.000	48.40	1.46	49.86	74	-24.14	peak	V	1.5	12
7311.000	36.30	1.46	37.76	54	-16.24	AVG	V	1.5	277

Test mode:		802.11n20(6.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4924.000	52.00	-4.03	47.97	74	-26.03	peak	H	1.5	135
4924.000	37.52	-4.03	33.49	54	-20.51	AVG	H	1.5	353
7386.000	49.35	1.66	51.01	74	-22.99	peak	H	1.5	234
7386.000	37.78	1.66	39.44	54	-14.56	AVG	H	1.5	358
4924.000	53.76	-4.03	49.73	74	-24.27	peak	V	1.5	120
4924.000	38.25	-4.03	34.22	54	-19.78	AVG	V	1.5	254
7386.000	50.40	1.66	52.06	74	-21.94	peak	V	1.5	181
7386.000	37.26	1.66	38.92	54	-15.08	AVG	V	1.5	194

Remark:

- 1) The MCS0 of rate of 802.11n20 is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11n40(13.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	52.50	-4.26	48.24	74	-25.76	peak	H	1.5	20
4824.000	37.78	-4.26	33.52	54	-20.48	AVG	H	1.5	269
7236.000	51.16	1.18	52.34	74	-21.66	peak	H	1.5	285
7236.000	38.05	1.18	39.23	54	-14.77	AVG	H	1.5	191
4824.000	54.92	-4.26	50.66	74	-23.34	peak	V	1.5	33
4824.000	38.76	-4.26	34.50	54	-19.50	AVG	V	1.5	92
7236.000	51.91	1.18	53.09	74	-20.91	peak	V	1.5	44
7236.000	36.57	1.18	37.75	54	-16.25	AVG	V	1.5	53

Test mode:		802.11n40(13.5Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	52.44	-4.12	48.32	74	-25.68	peak	H	1.5	4
4874.000	37.40	-4.12	33.28	54	-20.72	AVG	H	1.5	116
7311.000	48.38	1.46	49.84	74	-24.16	peak	H	1.5	77
7311.000	35.85	1.46	37.31	54	-16.69	AVG	H	1.5	21
4874.000	52.71	-4.12	48.59	74	-25.41	peak	V	1.5	22
4874.000	36.24	-4.12	32.12	54	-21.88	AVG	V	1.5	279
7311.000	50.09	1.46	51.55	74	-22.45	peak	V	1.5	132
7311.000	35.30	1.46	36.76	54	-17.24	AVG	V	1.5	209

Test mode:		802.11n40(13.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4924.000	52.79	-4.03	48.76	74	-25.24	peak	H	1.5	42
4924.000	37.86	-4.03	33.83	54	-20.17	AVG	H	1.5	41
7386.000	51.19	1.66	52.85	74	-21.15	peak	H	1.5	93
7386.000	36.67	1.66	38.33	54	-15.67	AVG	H	1.5	83
4924.000	54.91	-4.03	50.88	74	-23.12	peak	V	1.5	283
4924.000	37.98	-4.03	33.95	54	-20.05	AVG	V	1.5	291
7386.000	50.86	1.66	52.52	74	-21.48	peak	V	1.5	108
7386.000	37.18	1.66	38.84	54	-15.16	AVG	V	1.5	221

Remark:

- 1) The MCS0 of rate of 802.11n40 is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

5.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10 2020		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value

Test Setup:

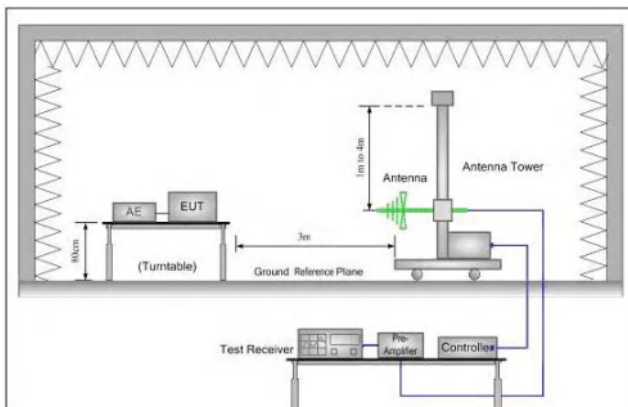


Figure 1. 30MHz to 1GHz

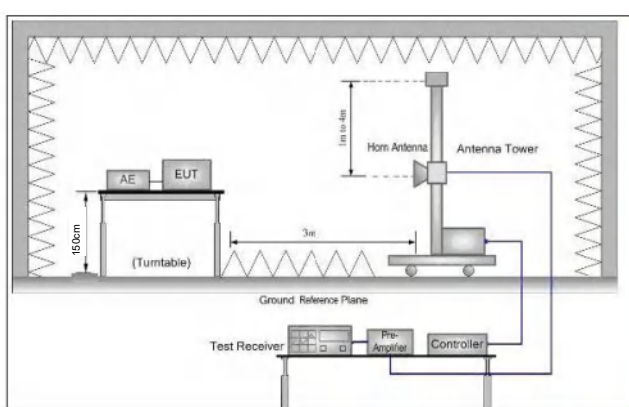


Figure 2. Above 1 GHz

Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - For each suspected emission, the EUT was arranged to its worst case and

	then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case . i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Test Results:	Pass

Test data:

Worse case mode:		802.11b(1Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2390.000	58.33	-9.2	49.13	74	-24.87	peak	H	1.5	227
2390.000	44.67	-9.2	35.47	54	-18.53	AVG	H	1.5	72
2400.000	59.67	-9.39	50.28	74	-23.72	peak	H	1.5	310
2400.000	46.55	-9.39	37.16	54	-16.84	AVG	H	1.5	161
2390.000	58.78	-9.2	49.58	74	-24.42	peak	V	1.5	92
2390.000	44.53	-9.2	35.33	54	-18.67	AVG	V	1.5	52
2400.000	59.86	-9.39	50.47	74	-23.53	peak	V	1.5	345
2400.000	46.40	-9.39	37.01	54	-16.99	AVG	V	1.5	118

Worse case mode:		802.11b(1Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2483.500	57.92	-9.29	48.63	74	-25.37	peak	H	1.5	37
2483.500	44.07	-9.29	34.78	54	-19.22	AVG	H	1.5	124
2483.500	58.42	-9.29	49.13	74	-24.87	peak	V	1.5	321
2483.500	46.29	-9.29	37.00	54	-17.00	AVG	V	1.5	206

Worse case mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2390.000	58.78	-9.2	49.58	74	-24.42	peak	H	1.5	241
2390.000	44.49	-9.2	35.29	54	-18.71	AVG	H	1.5	209
2400.000	60.23	-9.39	50.84	74	-23.16	peak	H	1.5	37
2400.000	46.20	-9.39	36.81	54	-17.19	AVG	H	1.5	154
2390.000	58.93	-9.2	49.73	74	-24.27	peak	V	1.5	40
2390.000	44.27	-9.2	35.07	54	-18.93	AVG	V	1.5	299
2400.000	59.77	-9.39	50.38	74	-23.62	peak	V	1.5	272
2400.000	46.50	-9.39	37.11	54	-16.89	AVG	V	1.5	330

Worse case mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2483.500	57.56	-9.29	48.27	74	-25.73	peak	H	1.5	165
2483.500	43.87	-9.29	34.58	54	-19.42	AVG	H	1.5	172
2483.500	57.81	-9.29	48.52	74	-25.48	peak	V	1.5	100
2483.500	45.47	-9.29	36.18	54	-17.82	AVG	V	1.5	155

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2390.000	58.29	-9.2	49.09	74	-24.91	peak	H	1.5	232
2390.000	44.53	-9.2	35.33	54	-18.67	AVG	H	1.5	27
2400.000	60.09	-9.39	50.70	74	-23.30	peak	H	1.5	314
2400.000	46.06	-9.39	36.67	54	-17.33	AVG	H	1.5	17
2390.000	58.32	-9.2	49.12	74	-24.88	peak	V	1.5	250
2390.000	44.58	-9.2	35.38	54	-18.62	AVG	V	1.5	279
2400.000	60.19	-9.39	50.80	74	-23.20	peak	V	1.5	242
2400.000	46.39	-9.39	37.00	54	-17.00	AVG	V	1.5	46

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2483.500	58.11	-9.29	48.82	74	-25.18	peak	H	1.5	166
2483.500	44.32	-9.29	35.03	54	-18.97	AVG	H	1.5	249
2483.500	57.60	-9.29	48.31	74	-25.69	peak	V	1.5	3
2483.500	45.86	-9.29	36.57	54	-17.43	AVG	V	1.5	101

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2390.000	58.70	-9.2	49.50	74	-24.50	peak	H	1.5	214
2390.000	44.79	-9.2	35.59	54	-18.41	AVG	H	1.5	32
2400.000	59.73	-9.39	50.34	74	-23.66	peak	H	1.5	305
2400.000	46.23	-9.39	36.84	54	-17.16	AVG	H	1.5	80
2390.000	59.01	-9.2	49.81	74	-24.19	peak	V	1.5	182
2390.000	44.78	-9.2	35.58	54	-18.42	AVG	V	1.5	121
2400.000	59.68	-9.39	50.29	74	-23.71	peak	V	1.5	246
2400.000	46.16	-9.39	36.77	54	-17.23	AVG	V	1.5	184

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2483.500	57.49	-9.29	48.20	74	-25.80	peak	H	1.5	177
2483.500	43.55	-9.29	34.26	54	-19.74	AVG	H	1.5	129
2483.500	58.29	-9.29	49.00	74	-25.00	peak	V	1.5	45
2483.500	46.11	-9.29	36.82	54	-17.18	AVG	V	1.5	82

Note:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor


6 Photographs - EUT Test Setup

6.1 Radiated Spurious Emission

9kHz~30MHz:

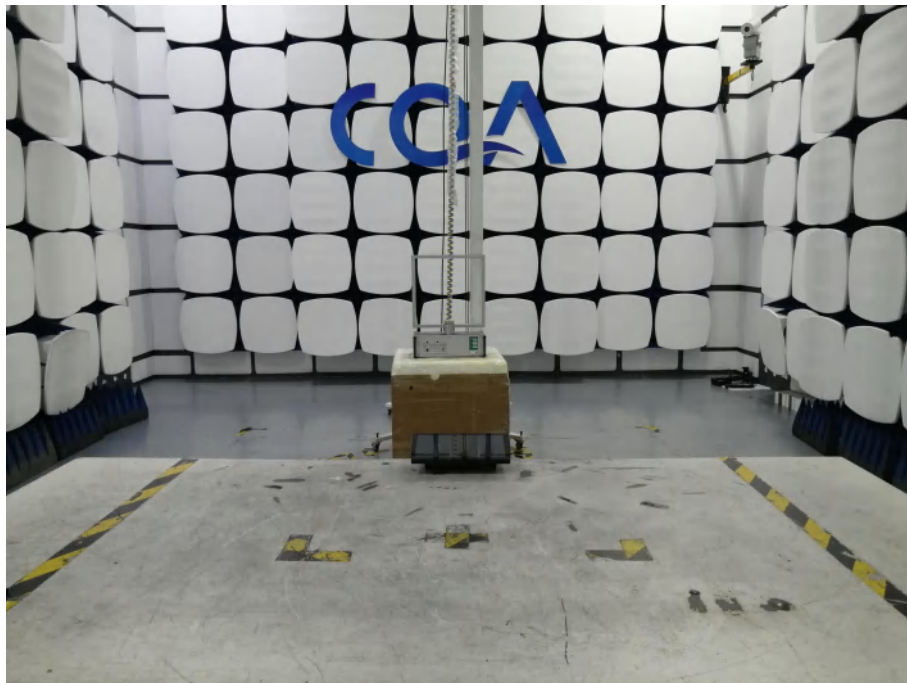

30MHz~1GHz:

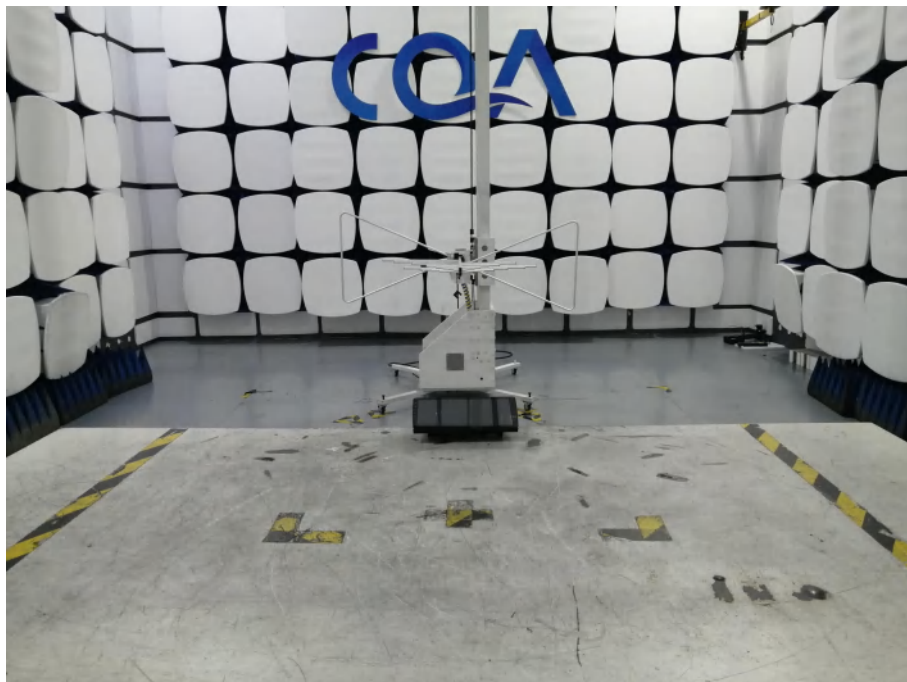

Above 1GHz:



6.2 RF Conducted measurement



7 Photographs - EUT Constructional Details

Refer to PHOTOGRAPHS OF EUT for CQASZ20251102692E-01.

*** END OF REPORT ***