




-6dB Bandwidth NVNT a 5825MHz Ant1

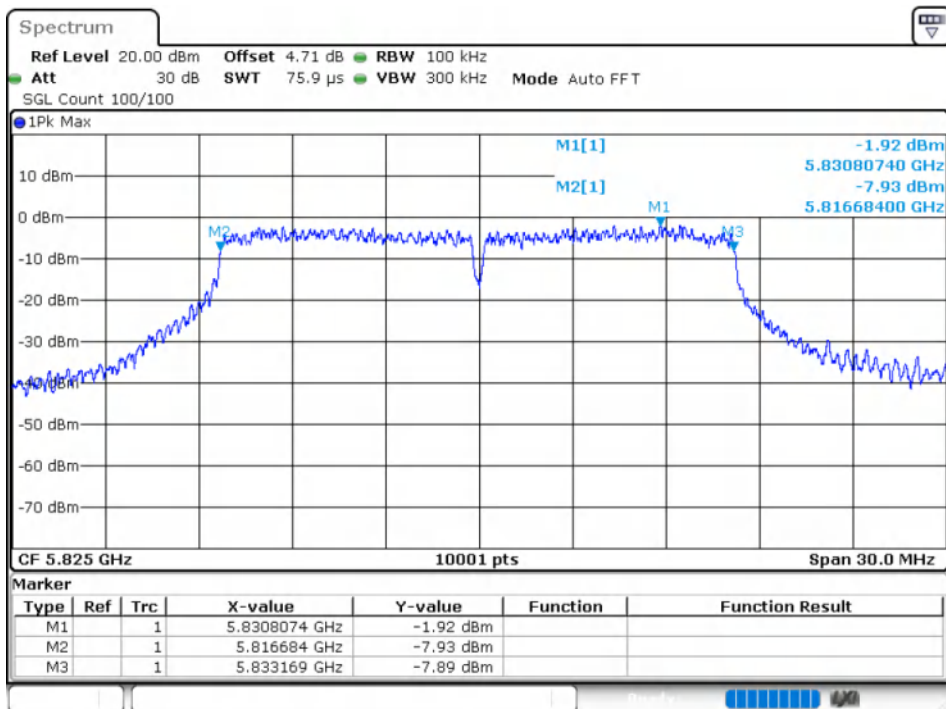


-6dB Bandwidth NVNT a 5745MHz Ant2

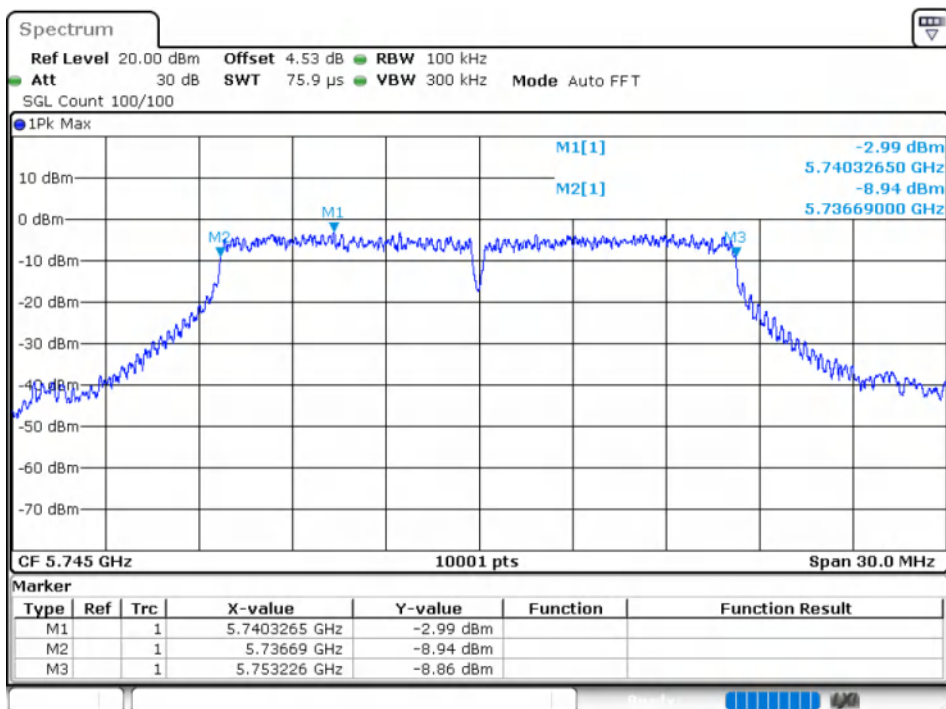


-6dB Bandwidth NVNT a 5785MHz Ant2

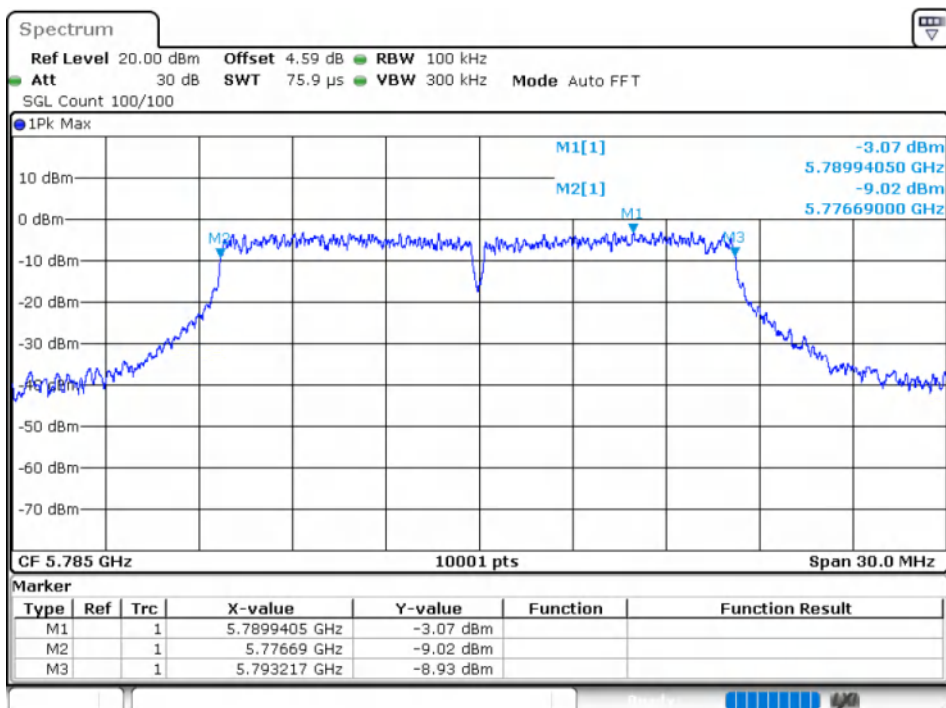


-6dB Bandwidth NVNT a 5825MHz Ant2

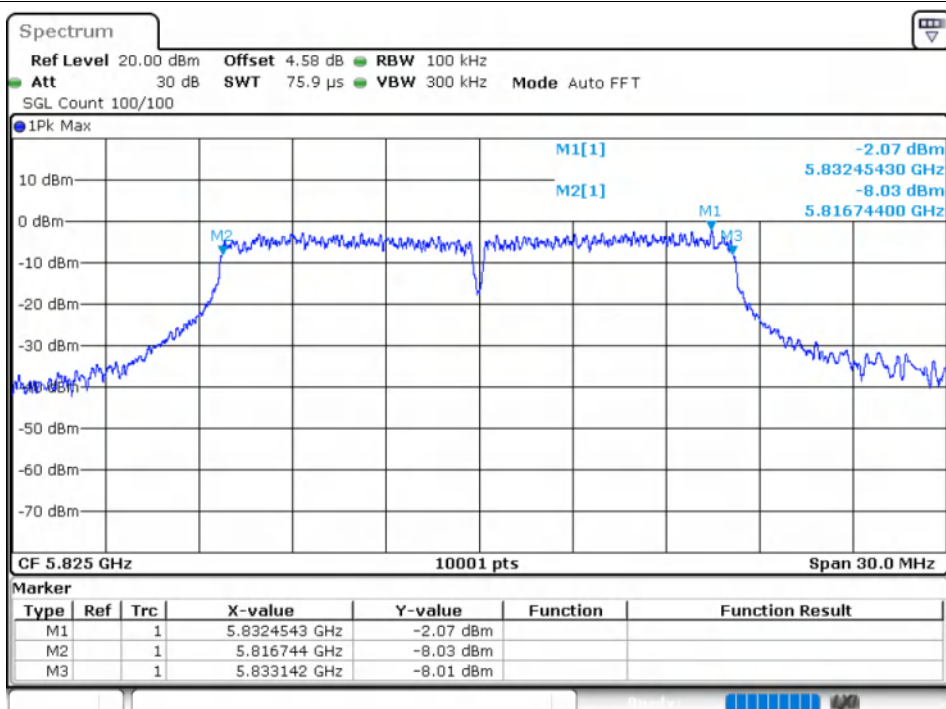


-6dB Bandwidth NVNT n20 5745MHz Ant1

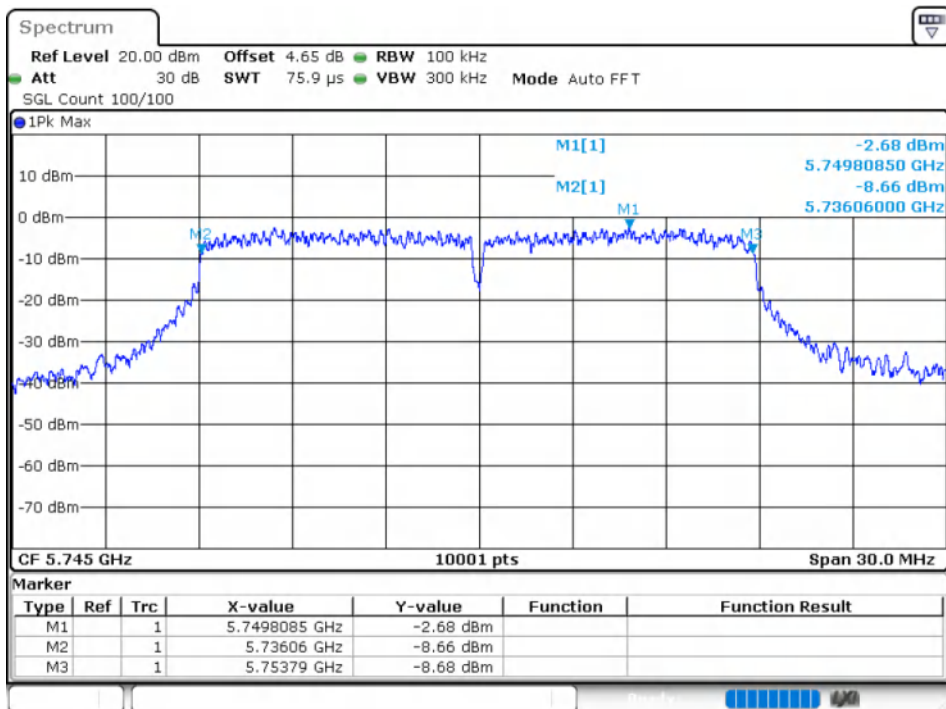


-6dB Bandwidth NVNT n20 5785MHz Ant1

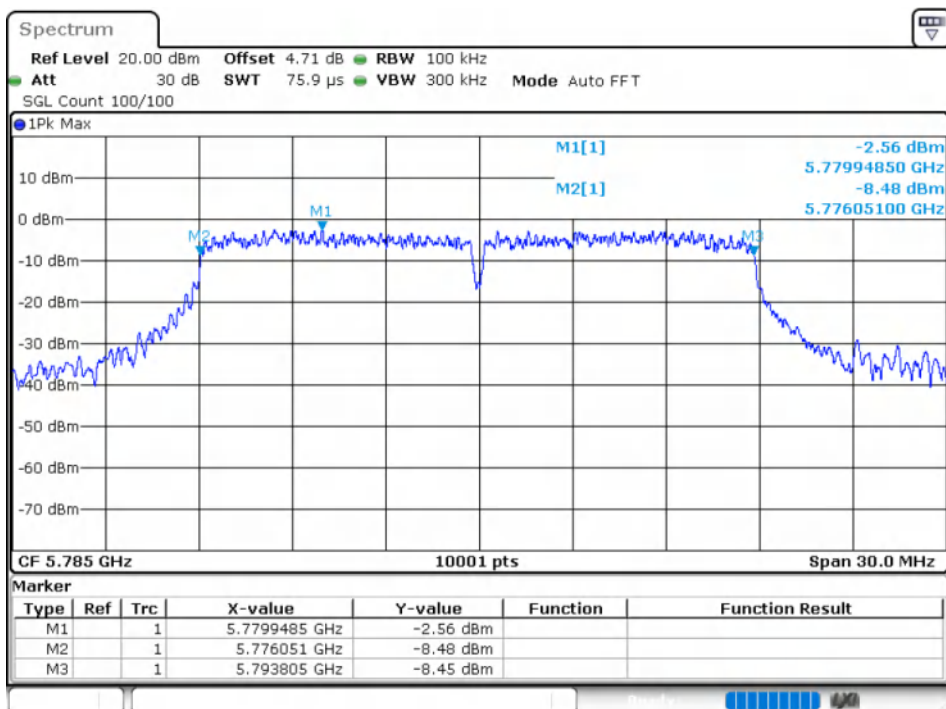


-6dB Bandwidth NVNT n20 5825MHz Ant1

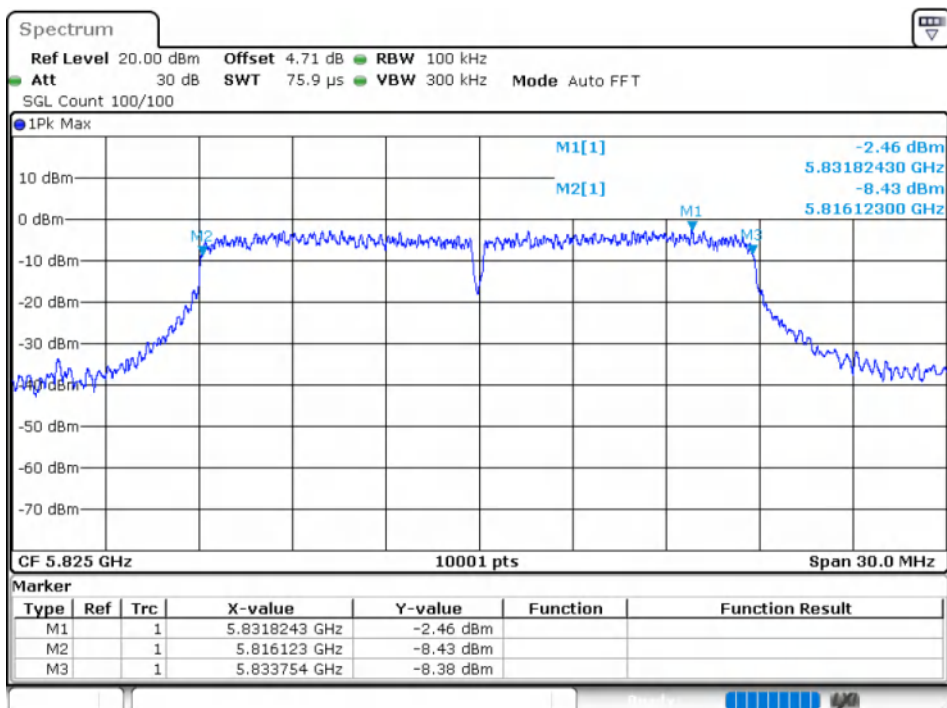


-6dB Bandwidth NVNT n20 5745MHz Ant2

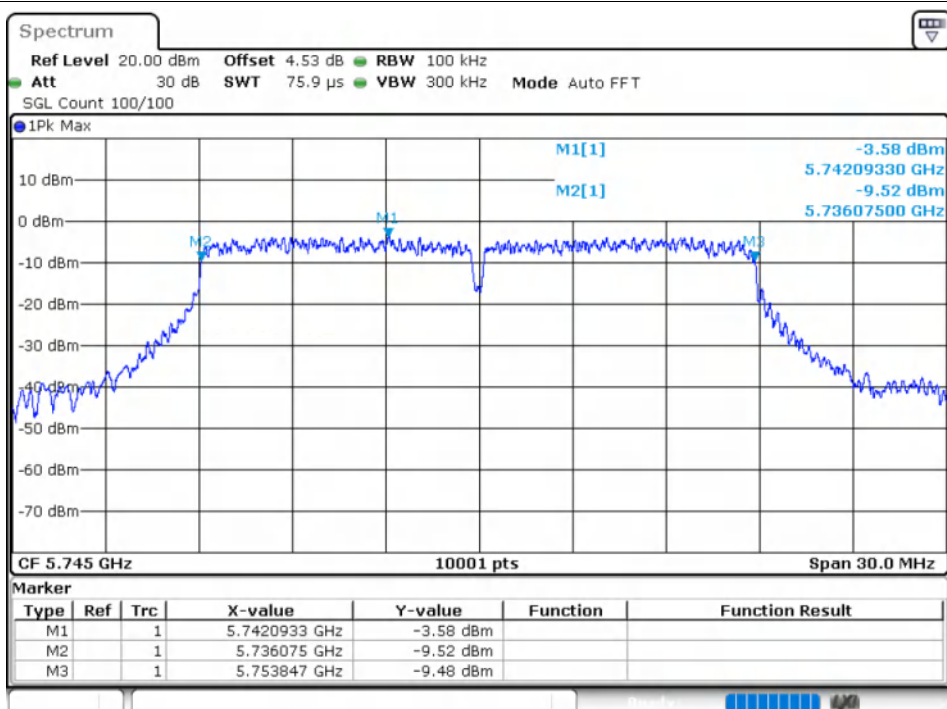


-6dB Bandwidth NVNT n20 5785MHz Ant2

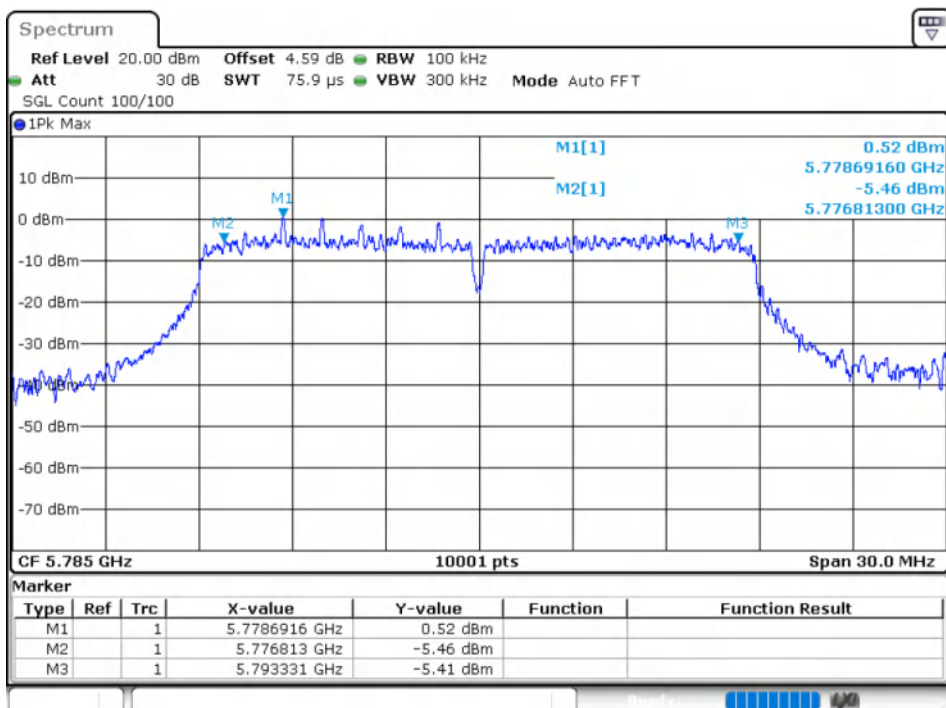


-6dB Bandwidth NVNT n20 5825MHz Ant2

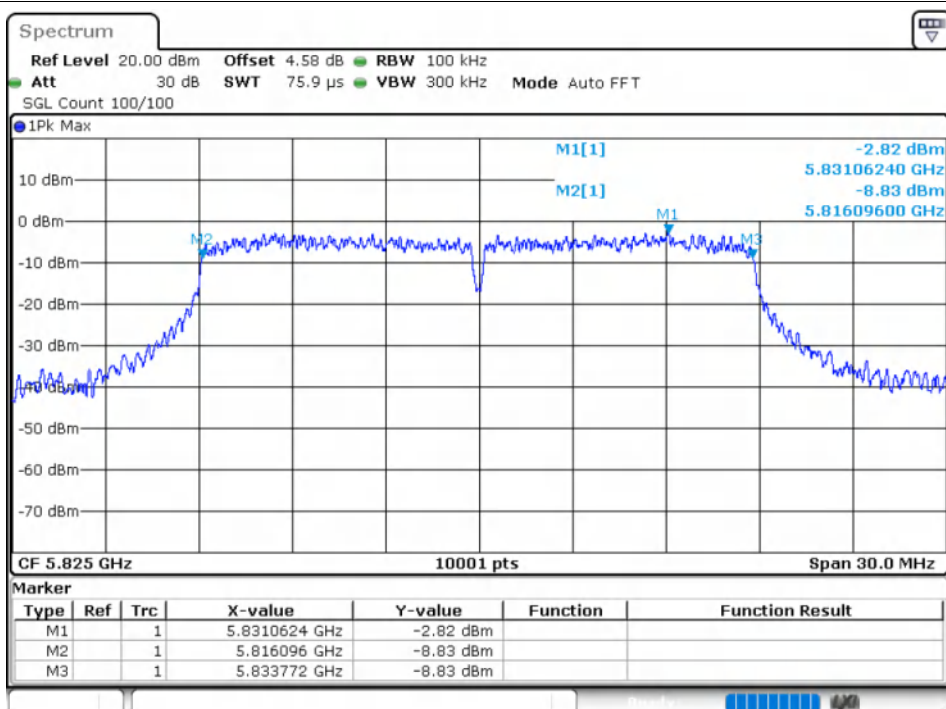


-6dB Bandwidth NVNT n40 5755MHz Ant1

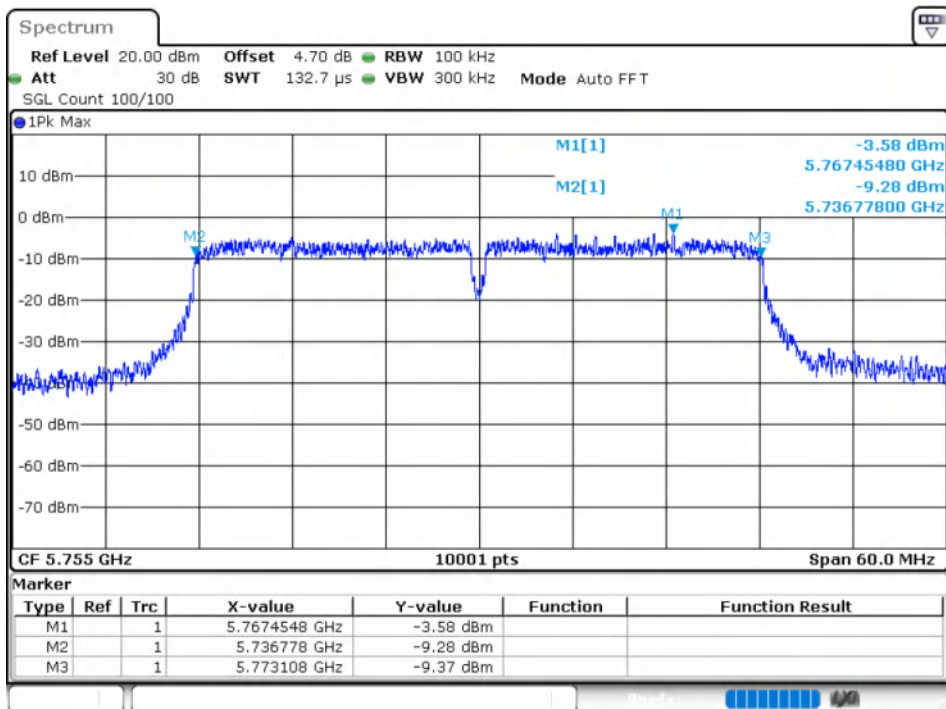


-6dB Bandwidth NVNT n40 5795MHz Ant1

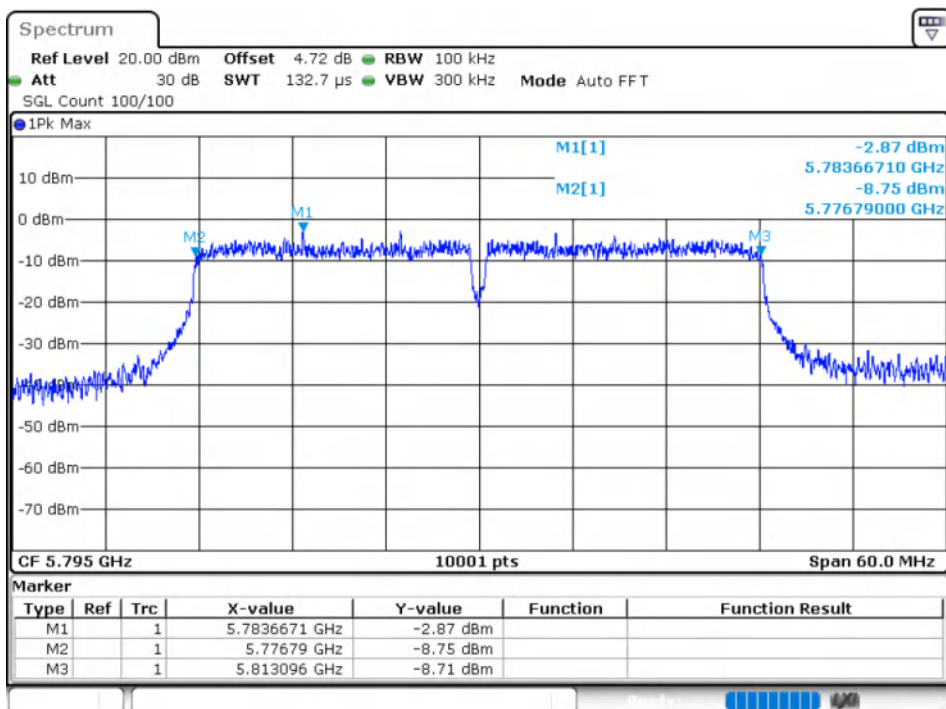


-6dB Bandwidth NVNT n40 5755MHz Ant2

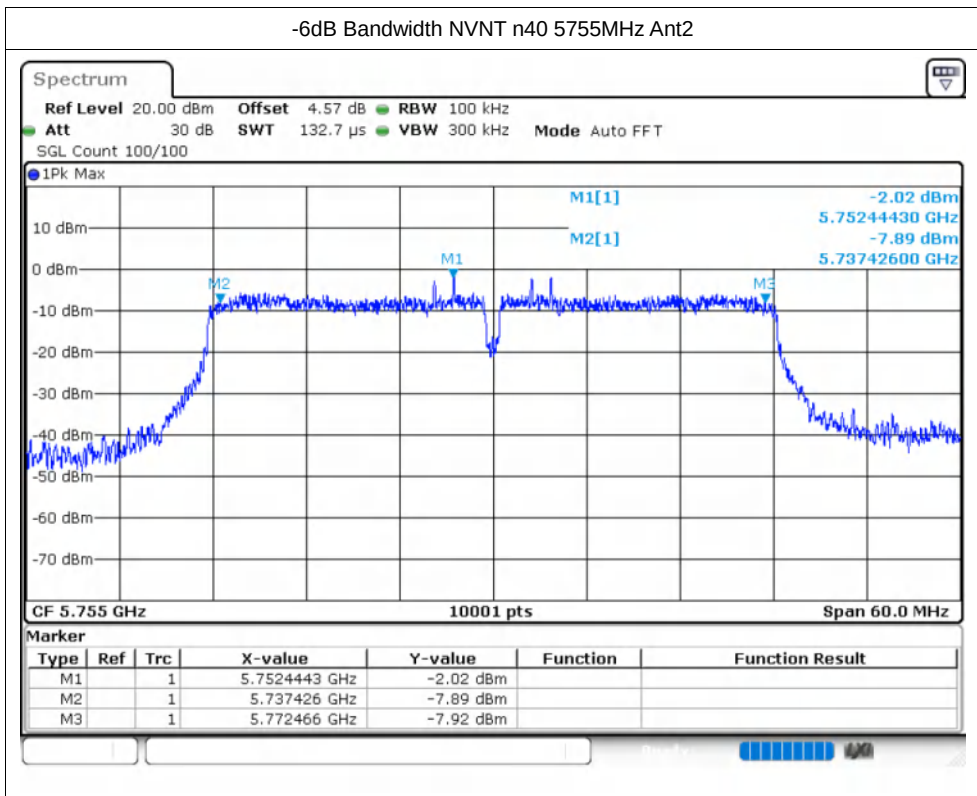


-6dB Bandwidth NVNT n40 5795MHz Ant2

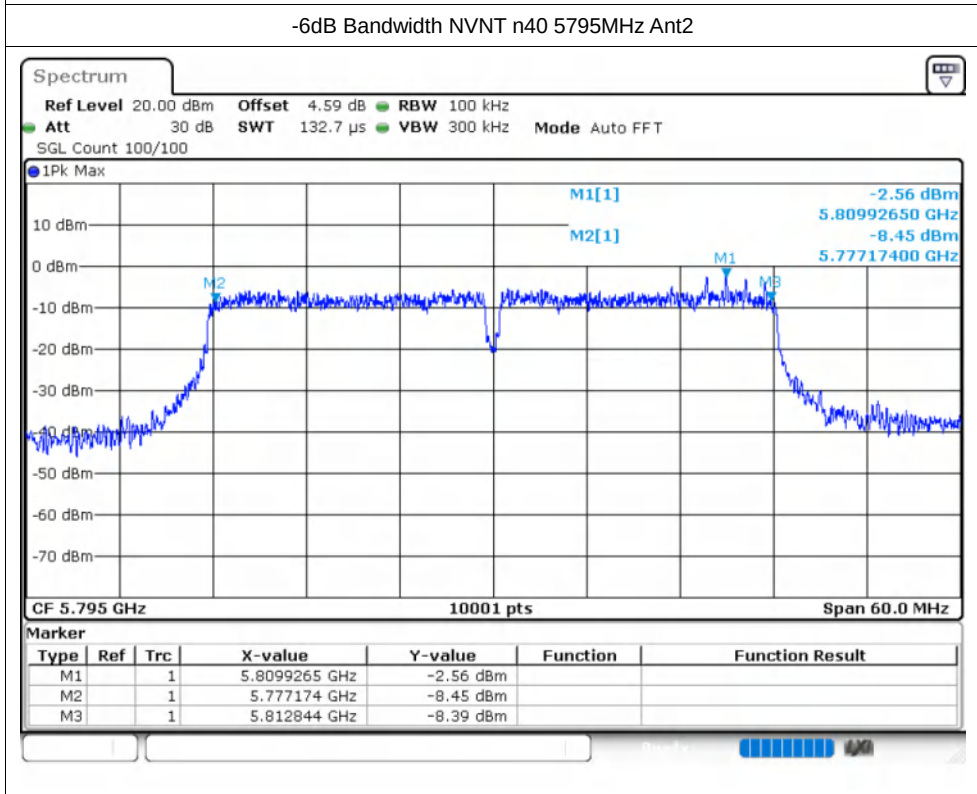


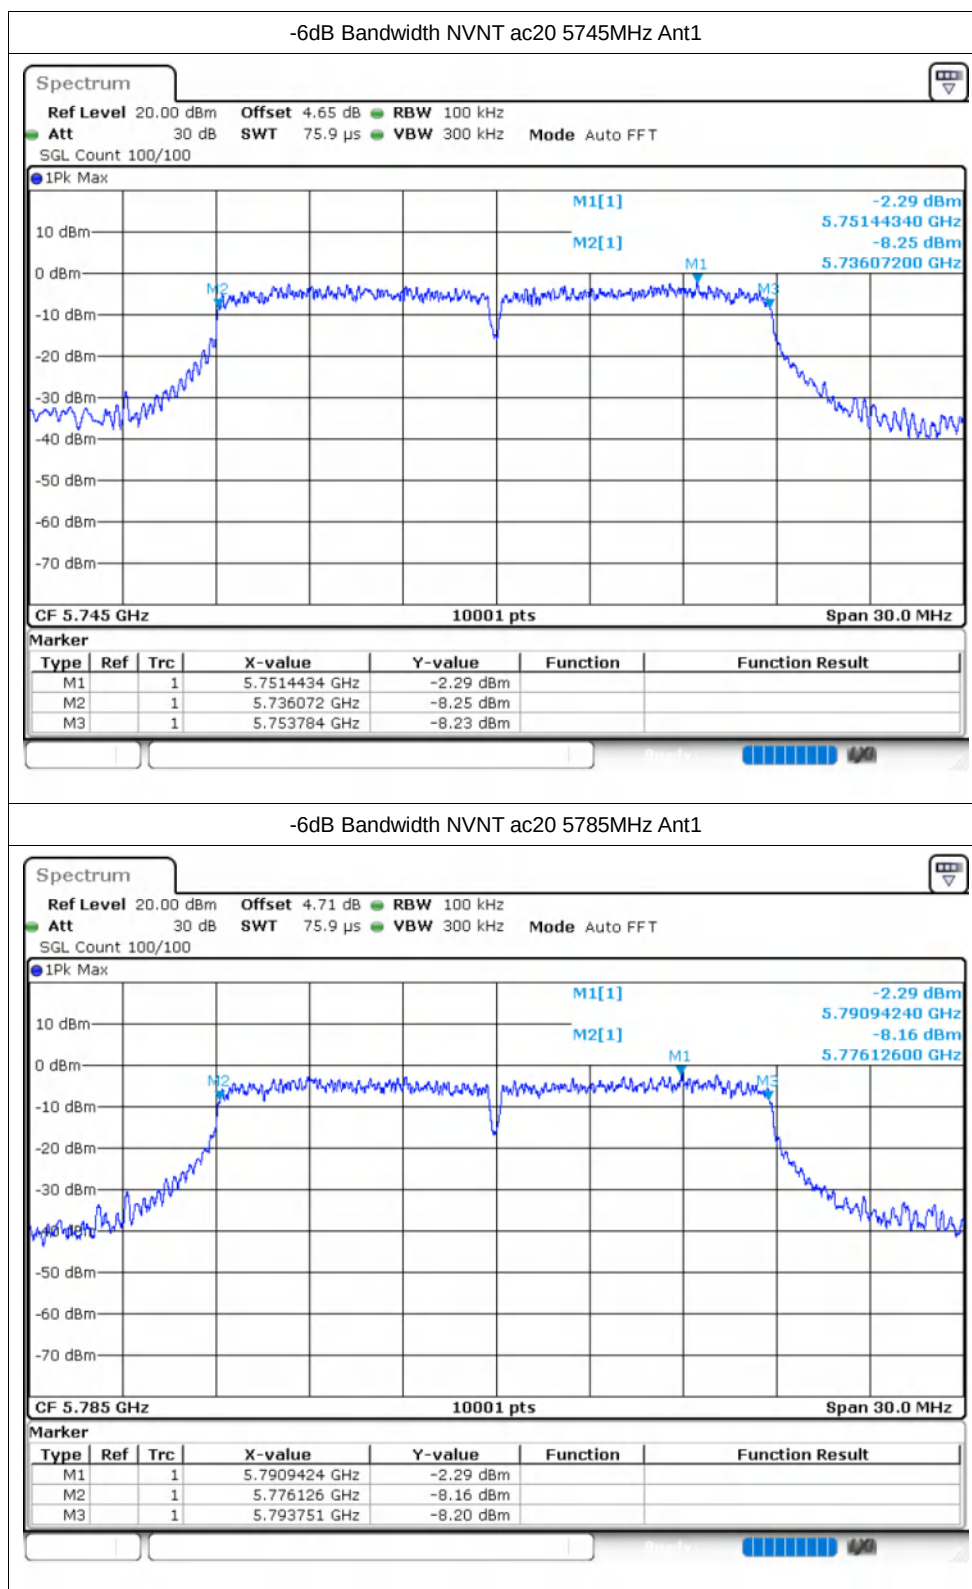



-6dB Bandwidth NVNT ac20 5825MHz Ant1

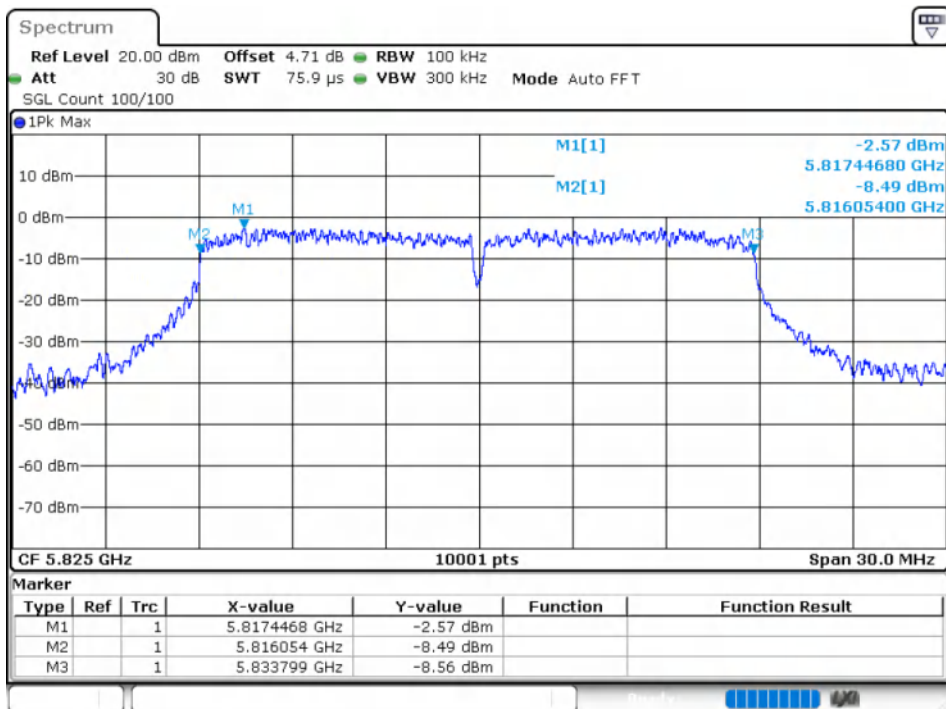


-6dB Bandwidth NVNT ac20 5745MHz Ant2

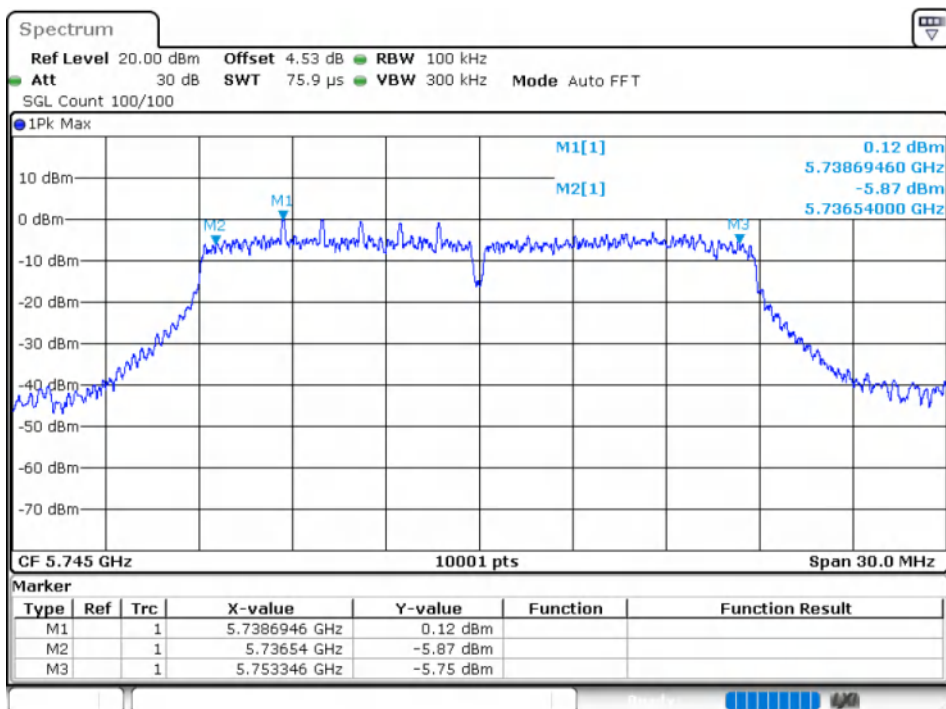


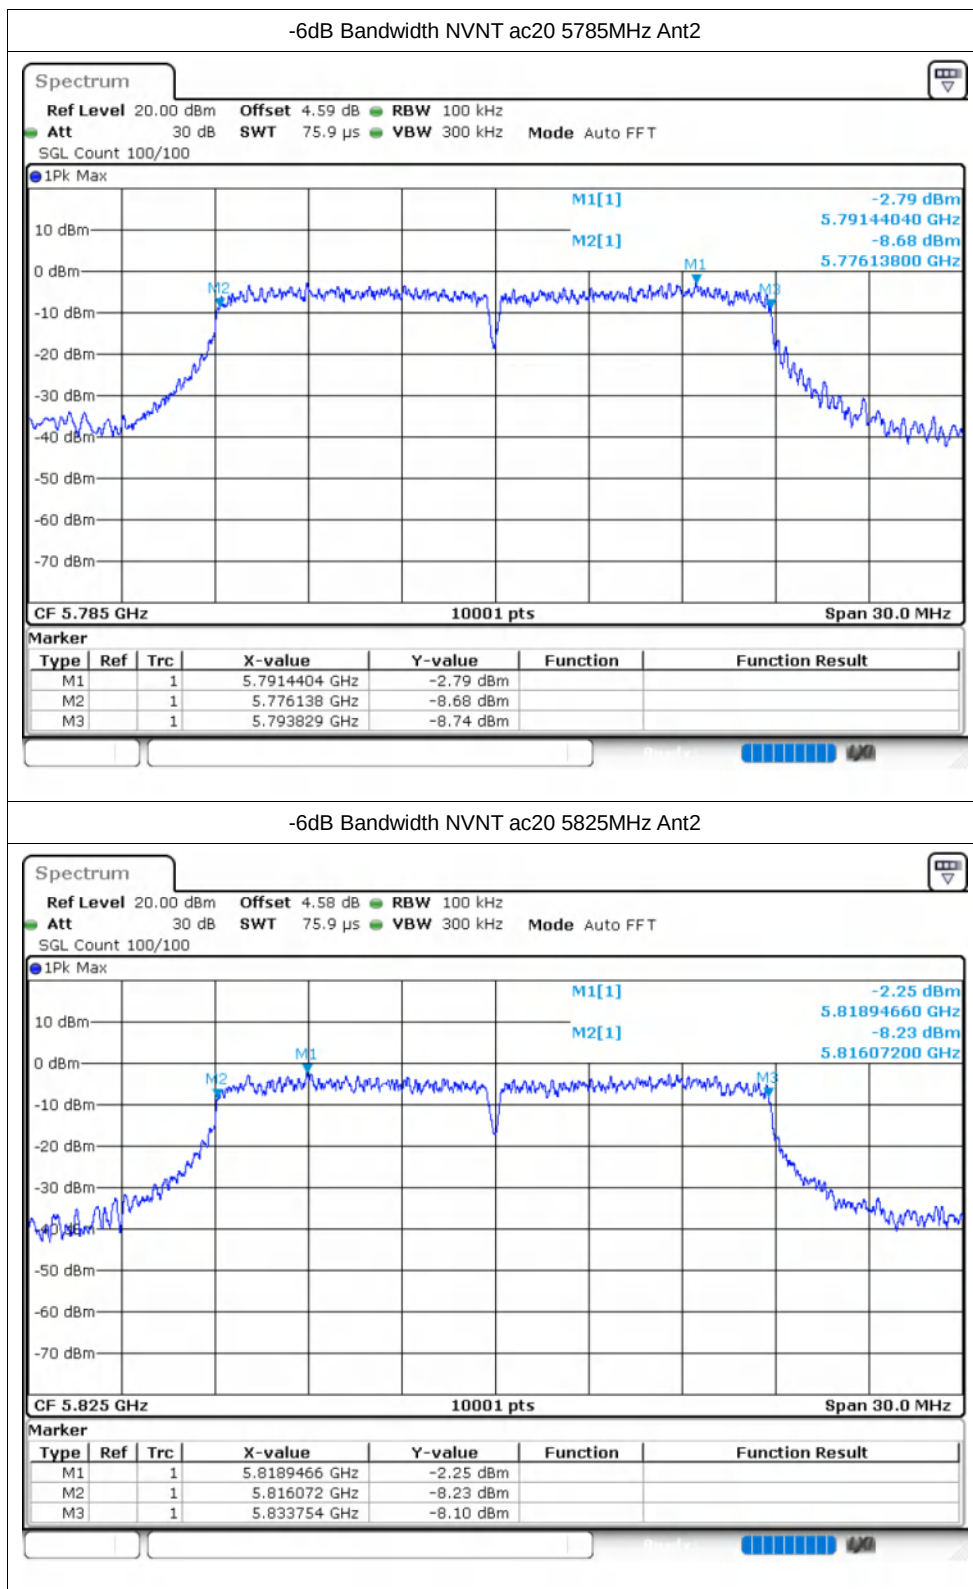

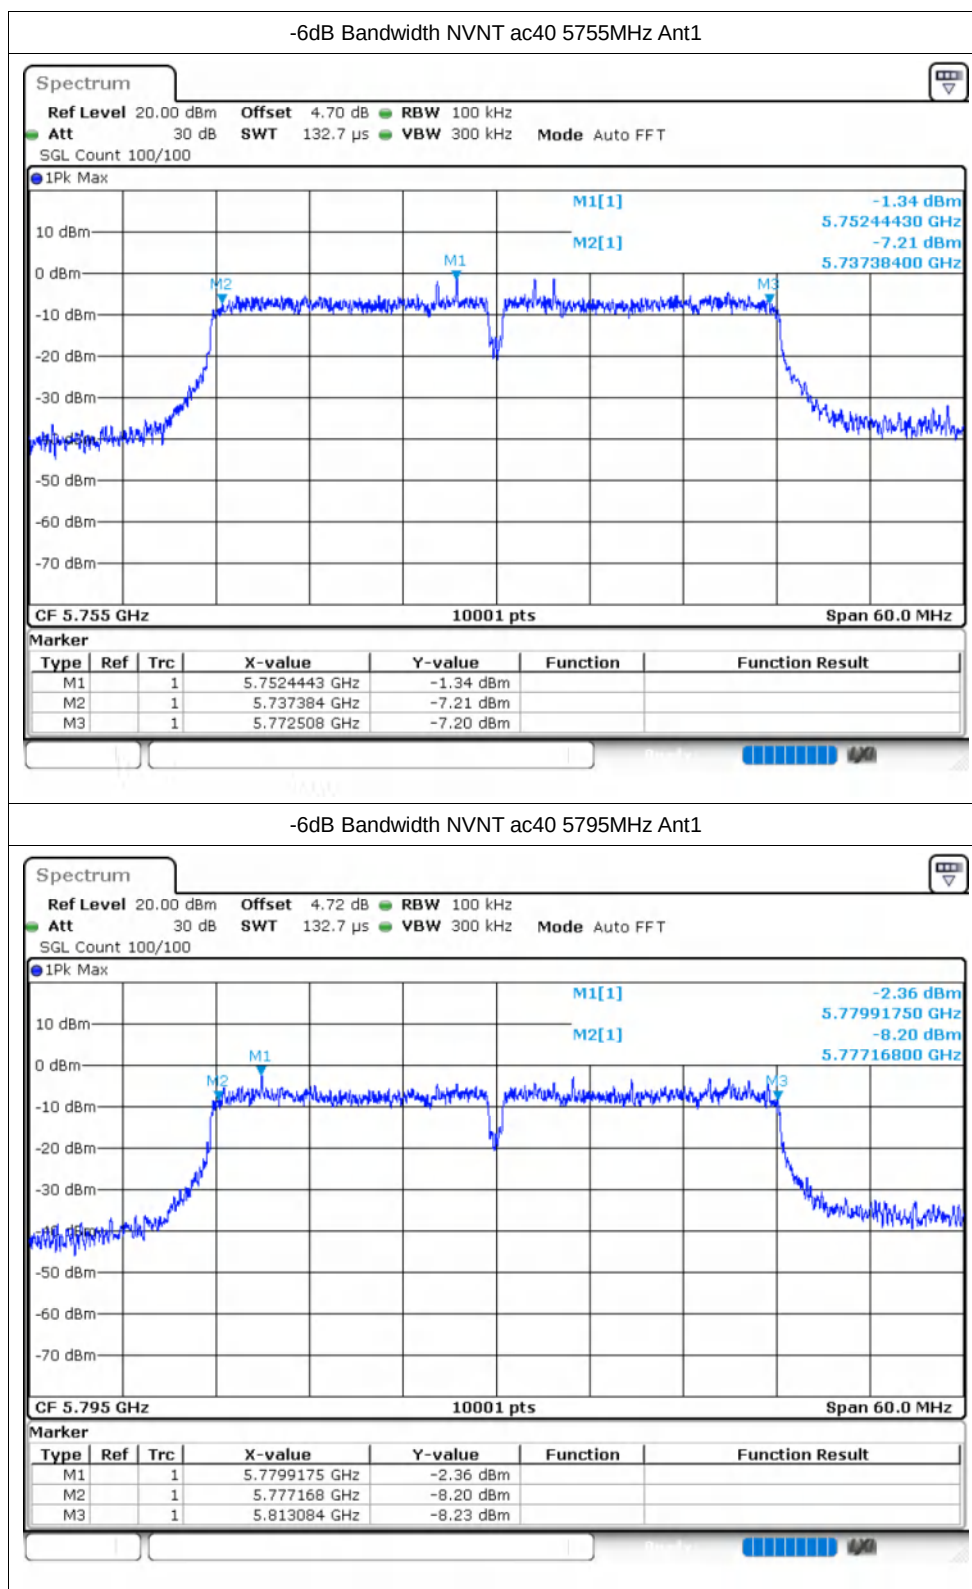


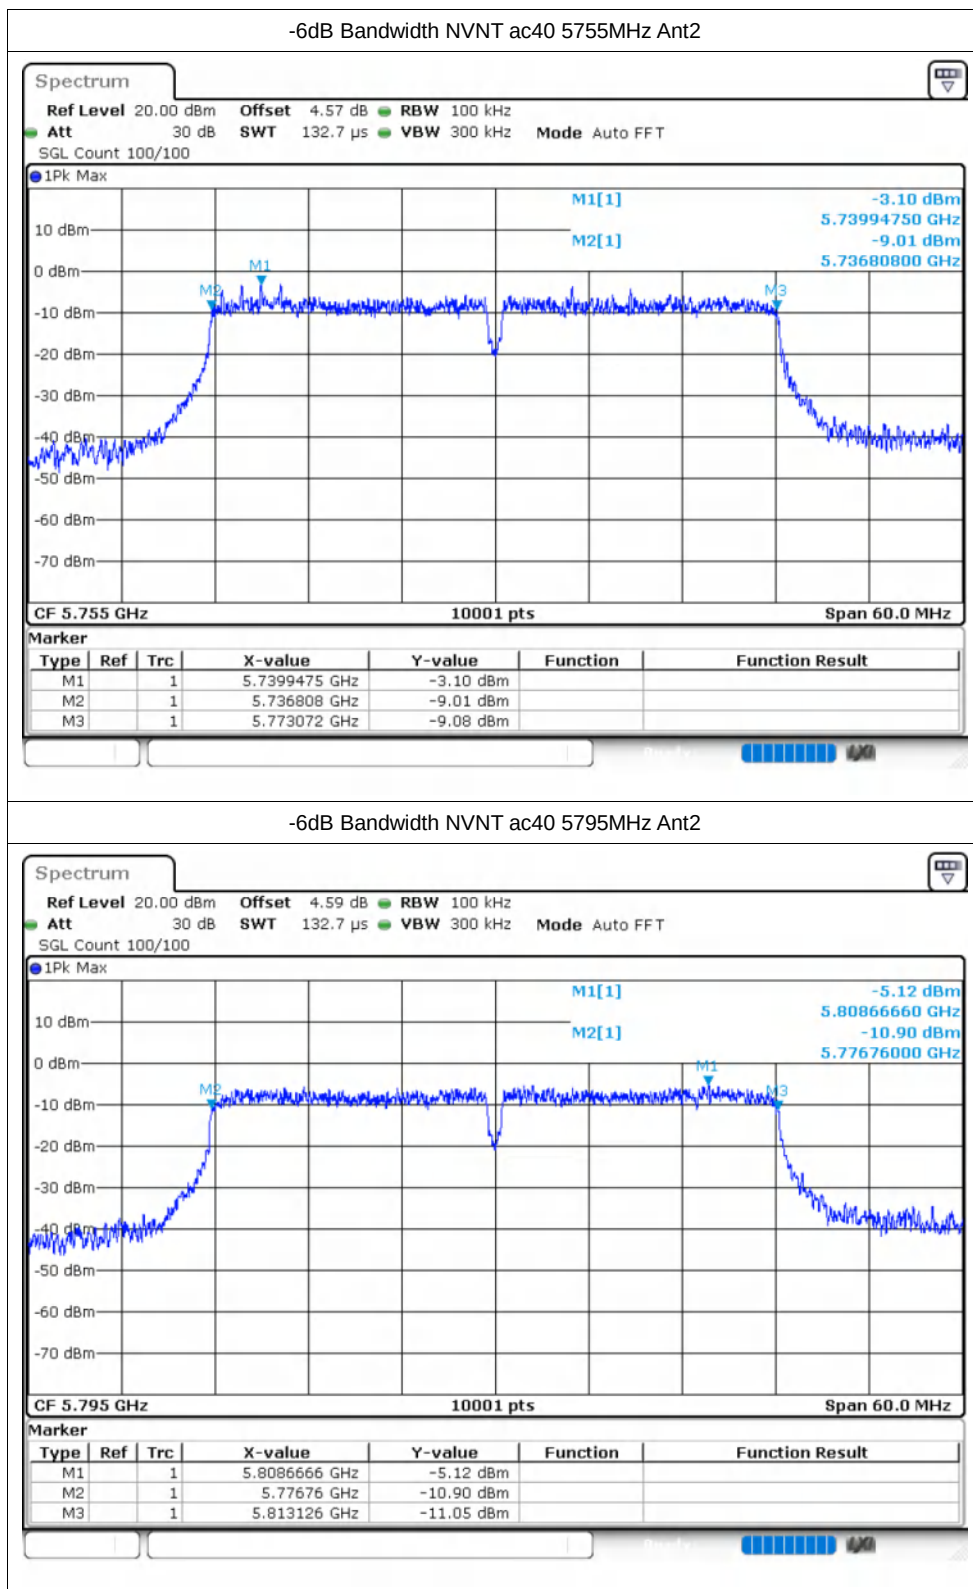

-6dB Bandwidth NVNT ac80 5775MHz Ant1

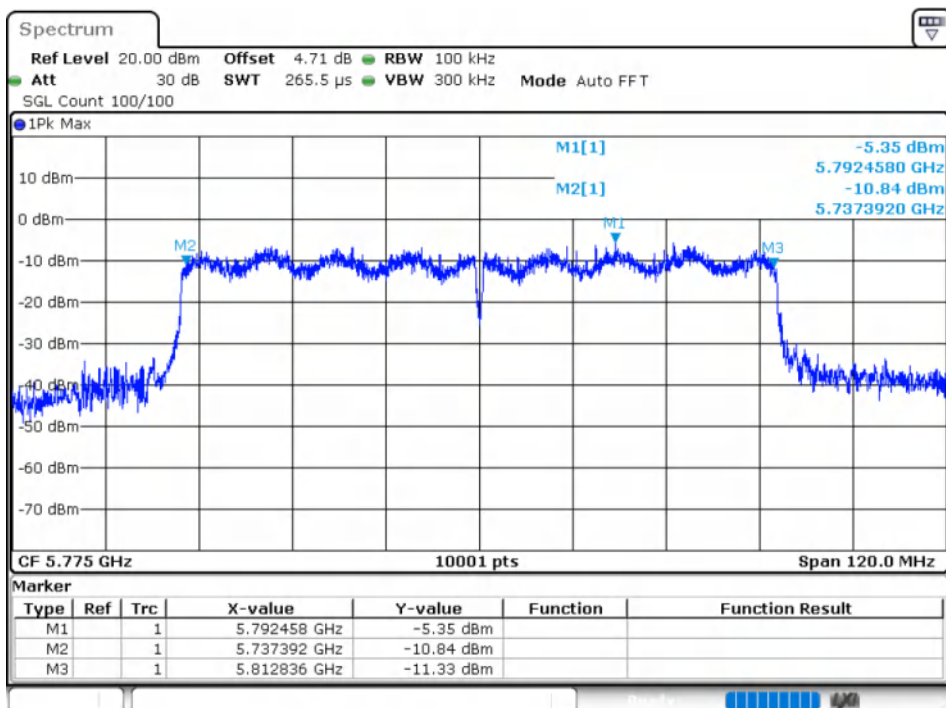

-6dB Bandwidth NVNT ac80 5775MHz Ant2

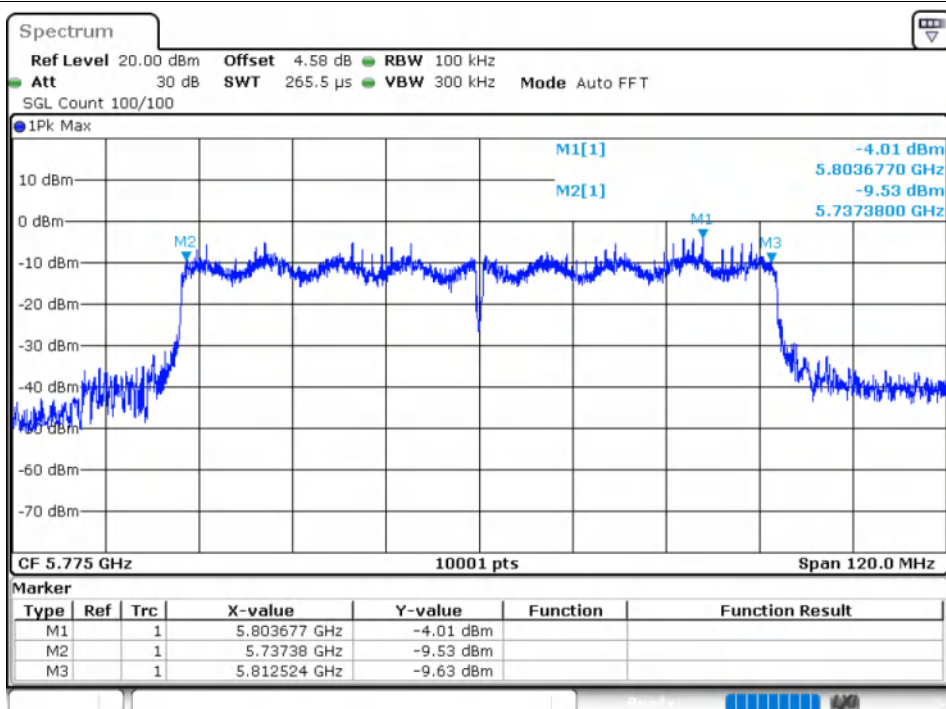


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5745	Ant1	16.597
NVNT	a	5785	Ant1	16.681
NVNT	a	5825	Ant1	16.627
NVNT	a	5745	Ant2	16.558
NVNT	a	5785	Ant2	16.699
NVNT	a	5825	Ant2	16.519
NVNT	n20	5745	Ant1	17.665
NVNT	n20	5785	Ant1	17.692
NVNT	n20	5825	Ant1	17.587
NVNT	n20	5745	Ant2	17.653
NVNT	n20	5785	Ant2	17.683
NVNT	n20	5825	Ant2	17.611
NVNT	n40	5755	Ant1	36.332
NVNT	n40	5795	Ant1	36.326
NVNT	n40	5755	Ant2	36.308
NVNT	n40	5795	Ant2	36.314
NVNT	ac20	5745	Ant1	17.617
NVNT	ac20	5785	Ant1	17.617
NVNT	ac20	5825	Ant1	17.728
NVNT	ac20	5745	Ant2	17.671
NVNT	ac20	5785	Ant2	17.638
NVNT	ac20	5825	Ant2	17.662
NVNT	ac40	5755	Ant1	36.314
NVNT	ac40	5795	Ant1	36.32
NVNT	ac40	5755	Ant2	36.302
NVNT	ac40	5795	Ant2	36.308
NVNT	ac80	5775	Ant1	75.556
NVNT	ac80	5775	Ant2	75.604


Test Graphs


OBW NVNT a 5745MHz Ant1

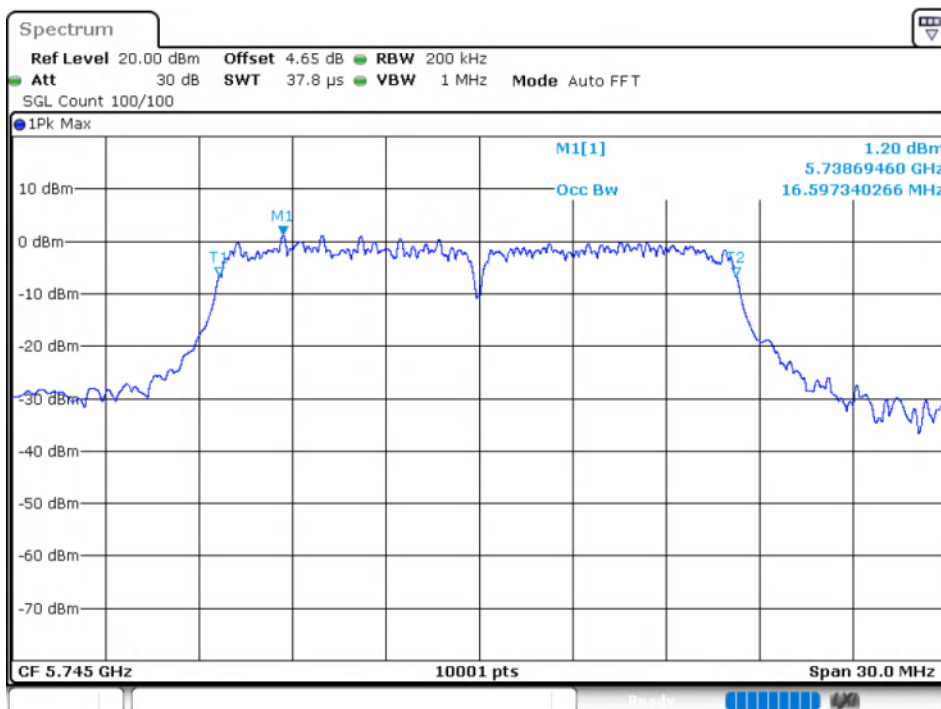



OBW NVNT a 5785MHz Ant1

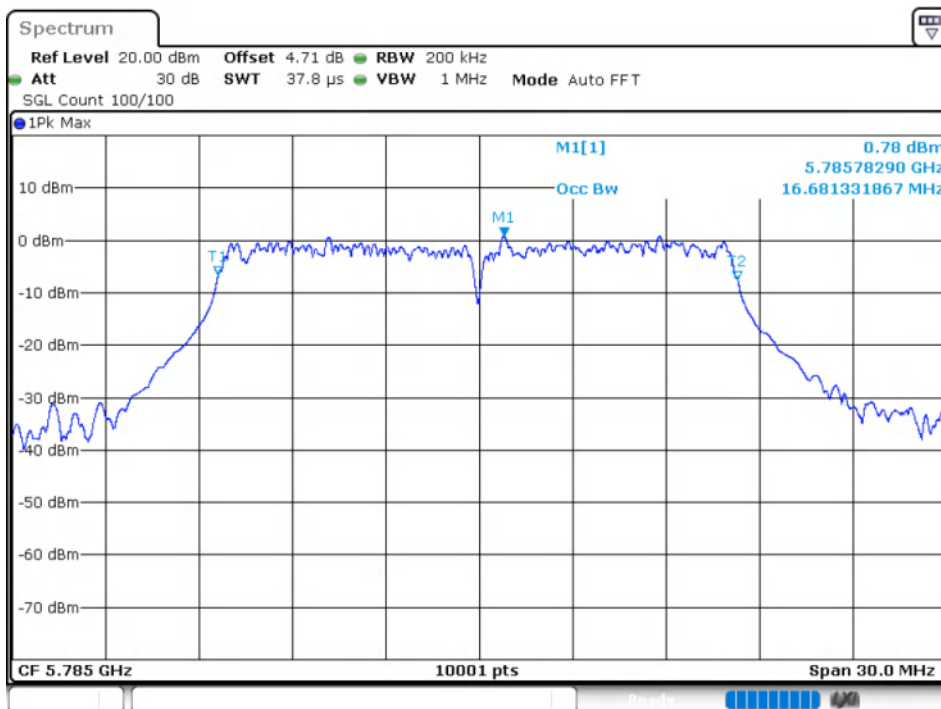



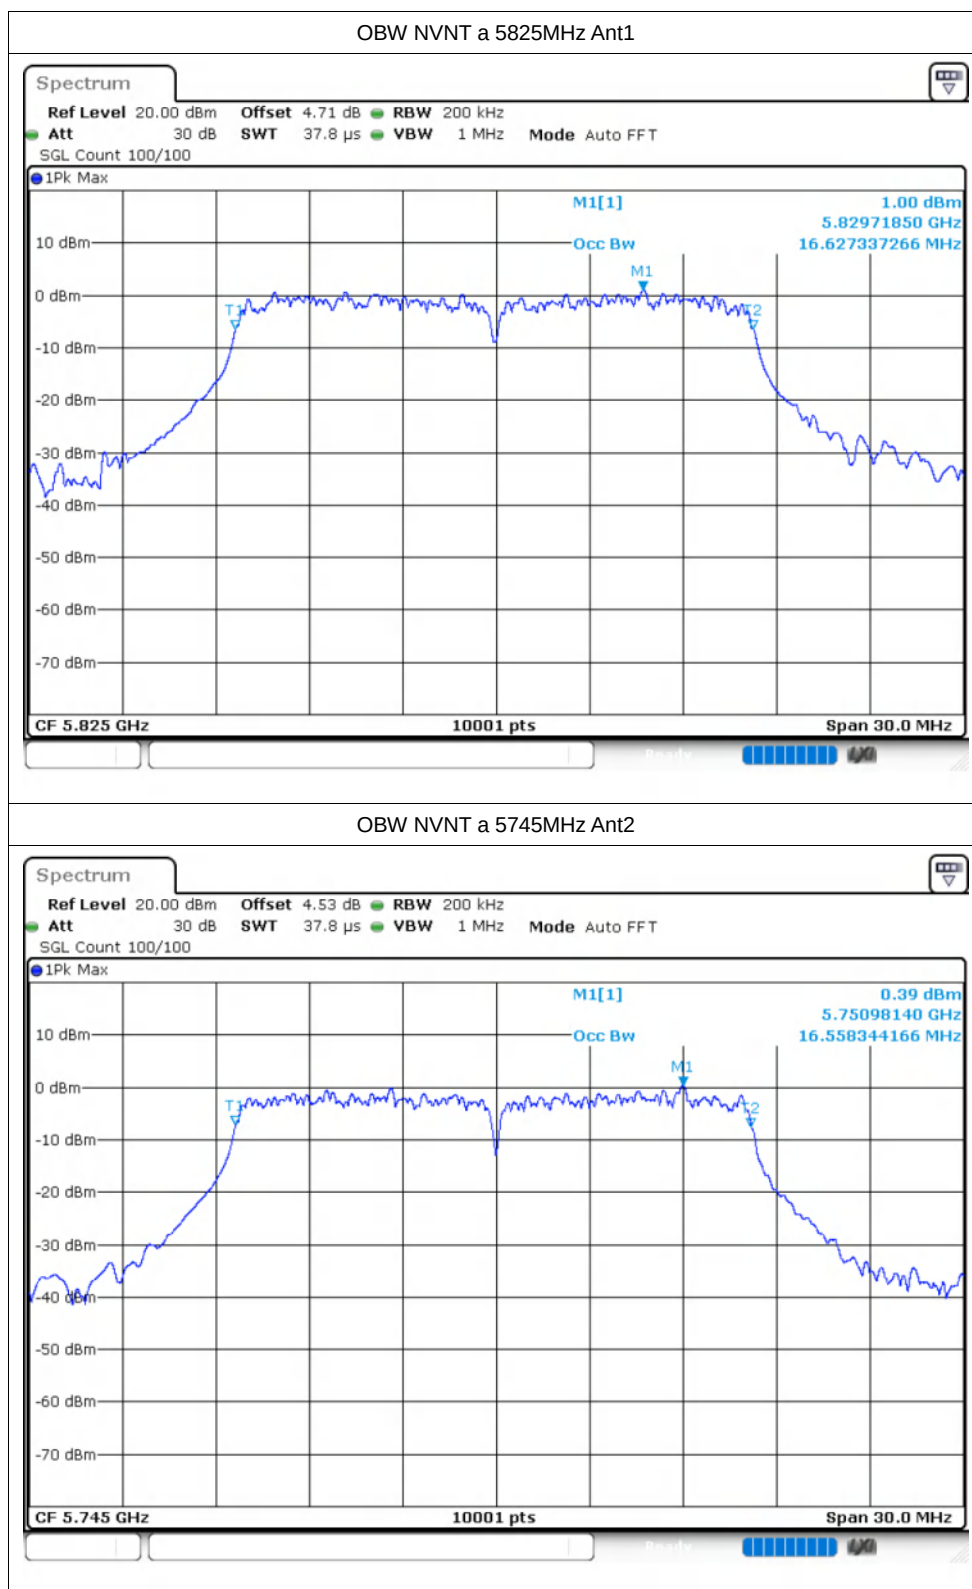


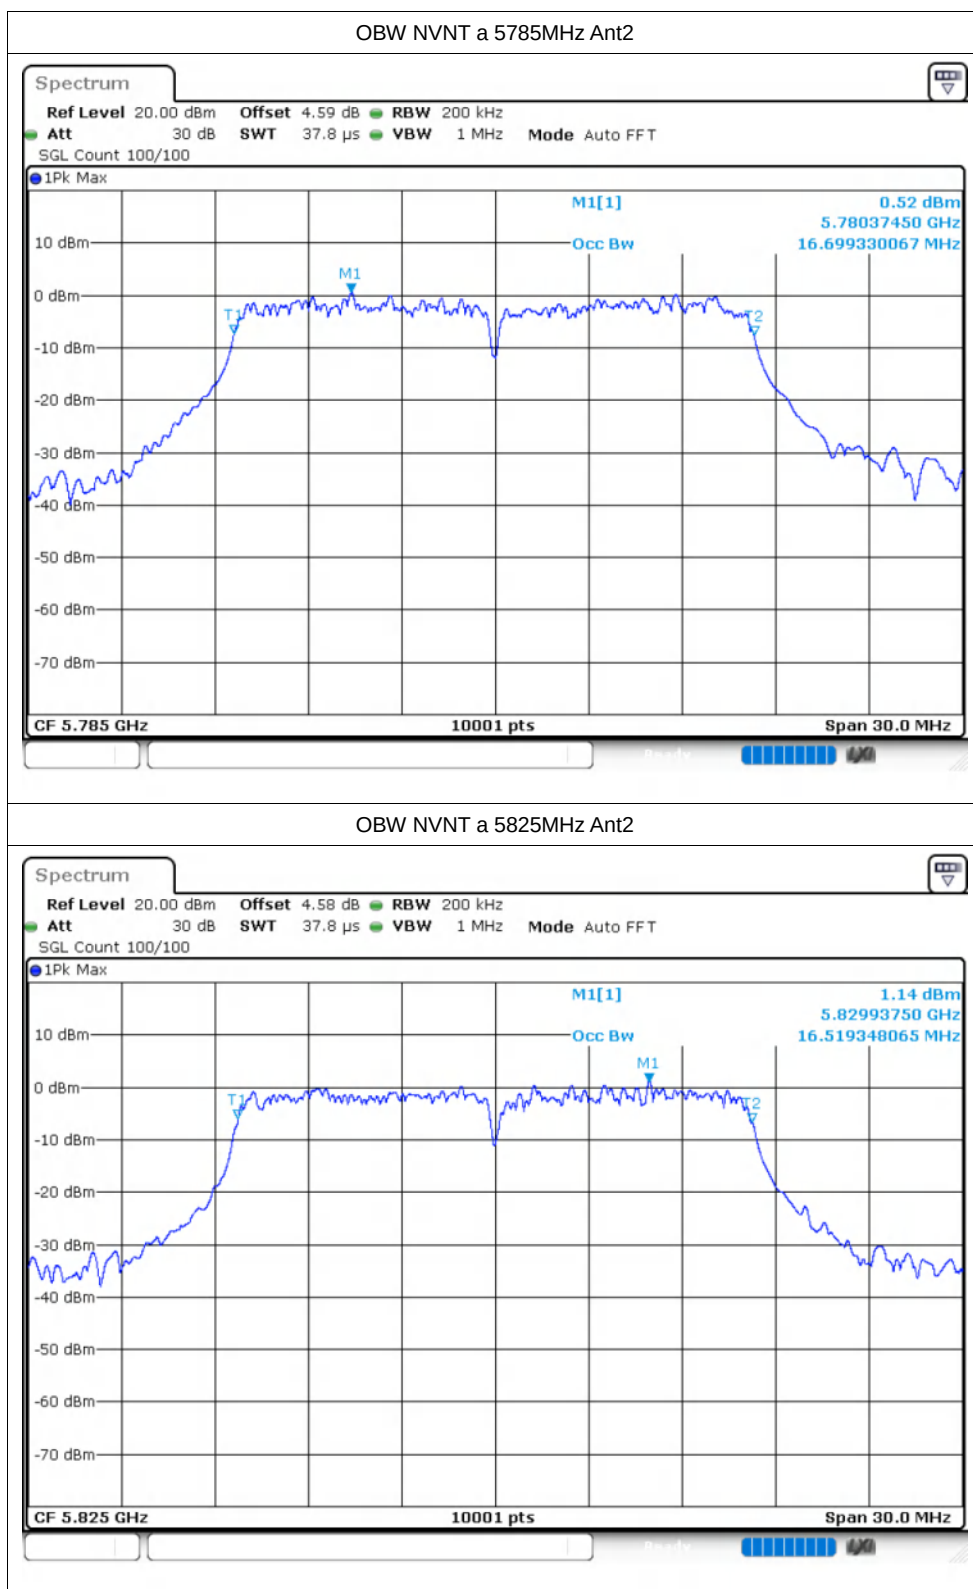


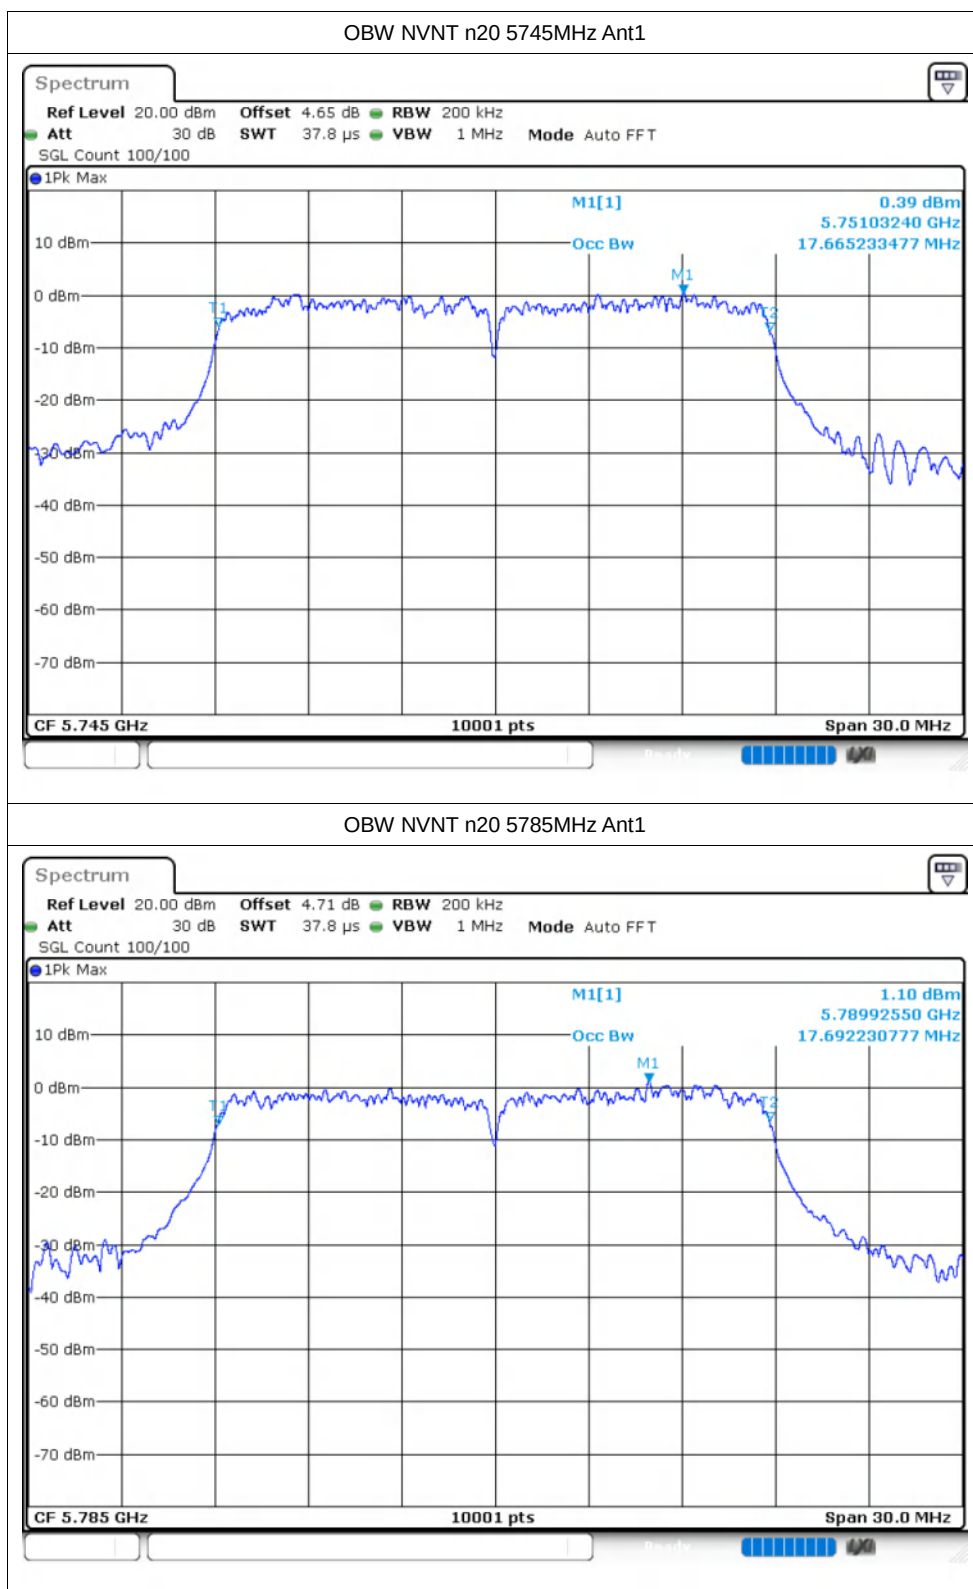


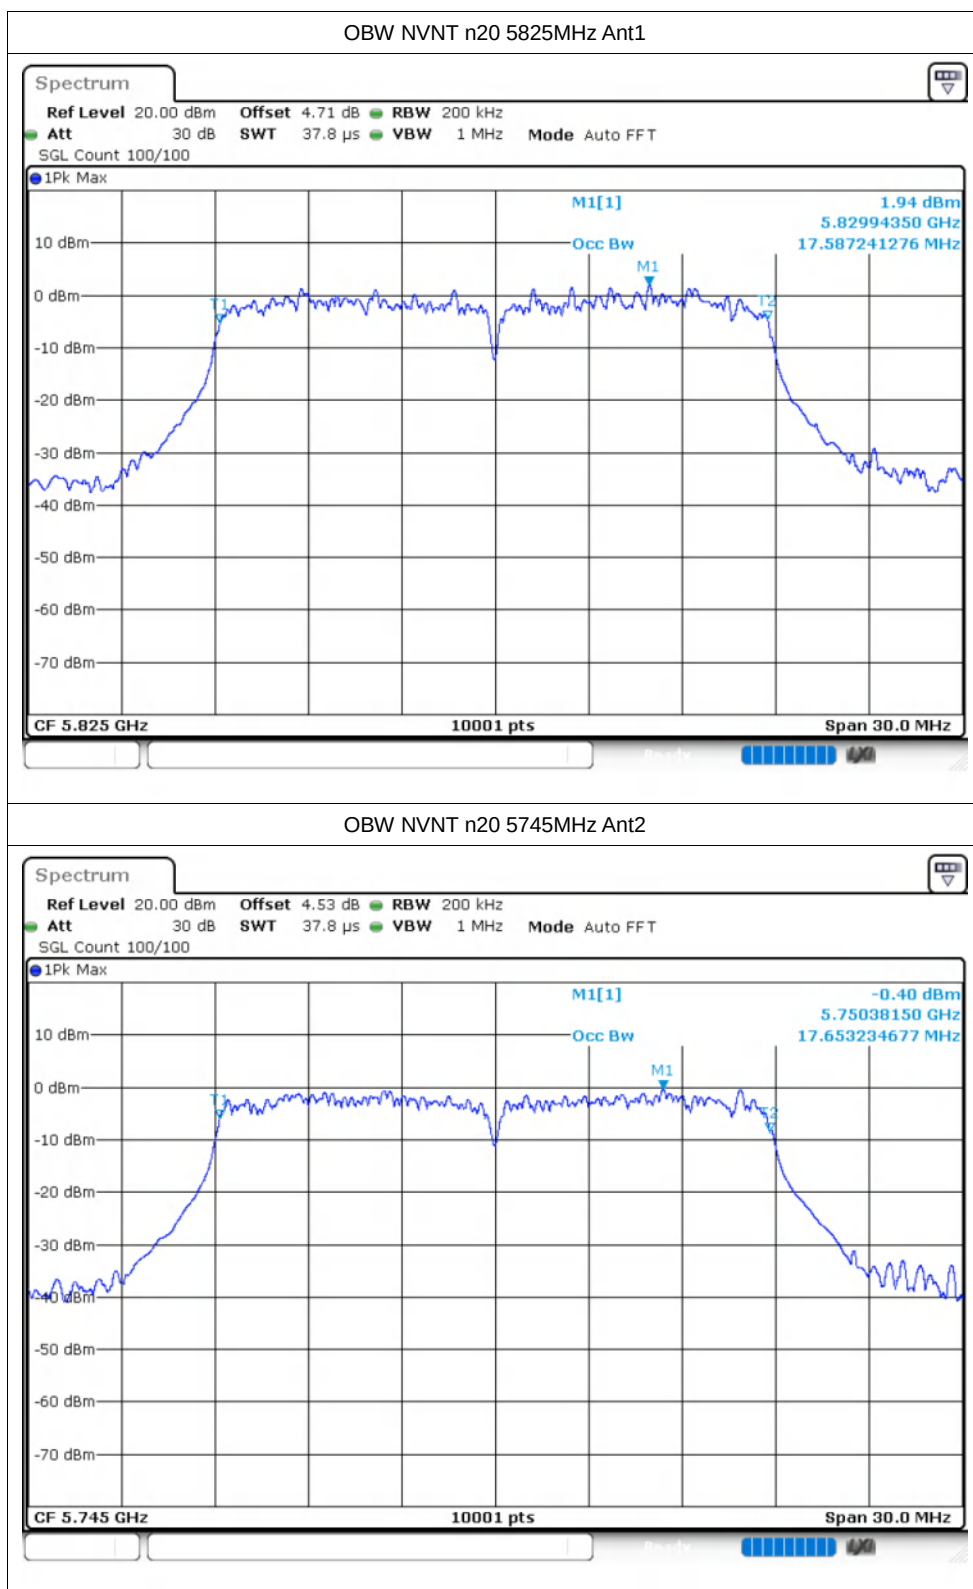


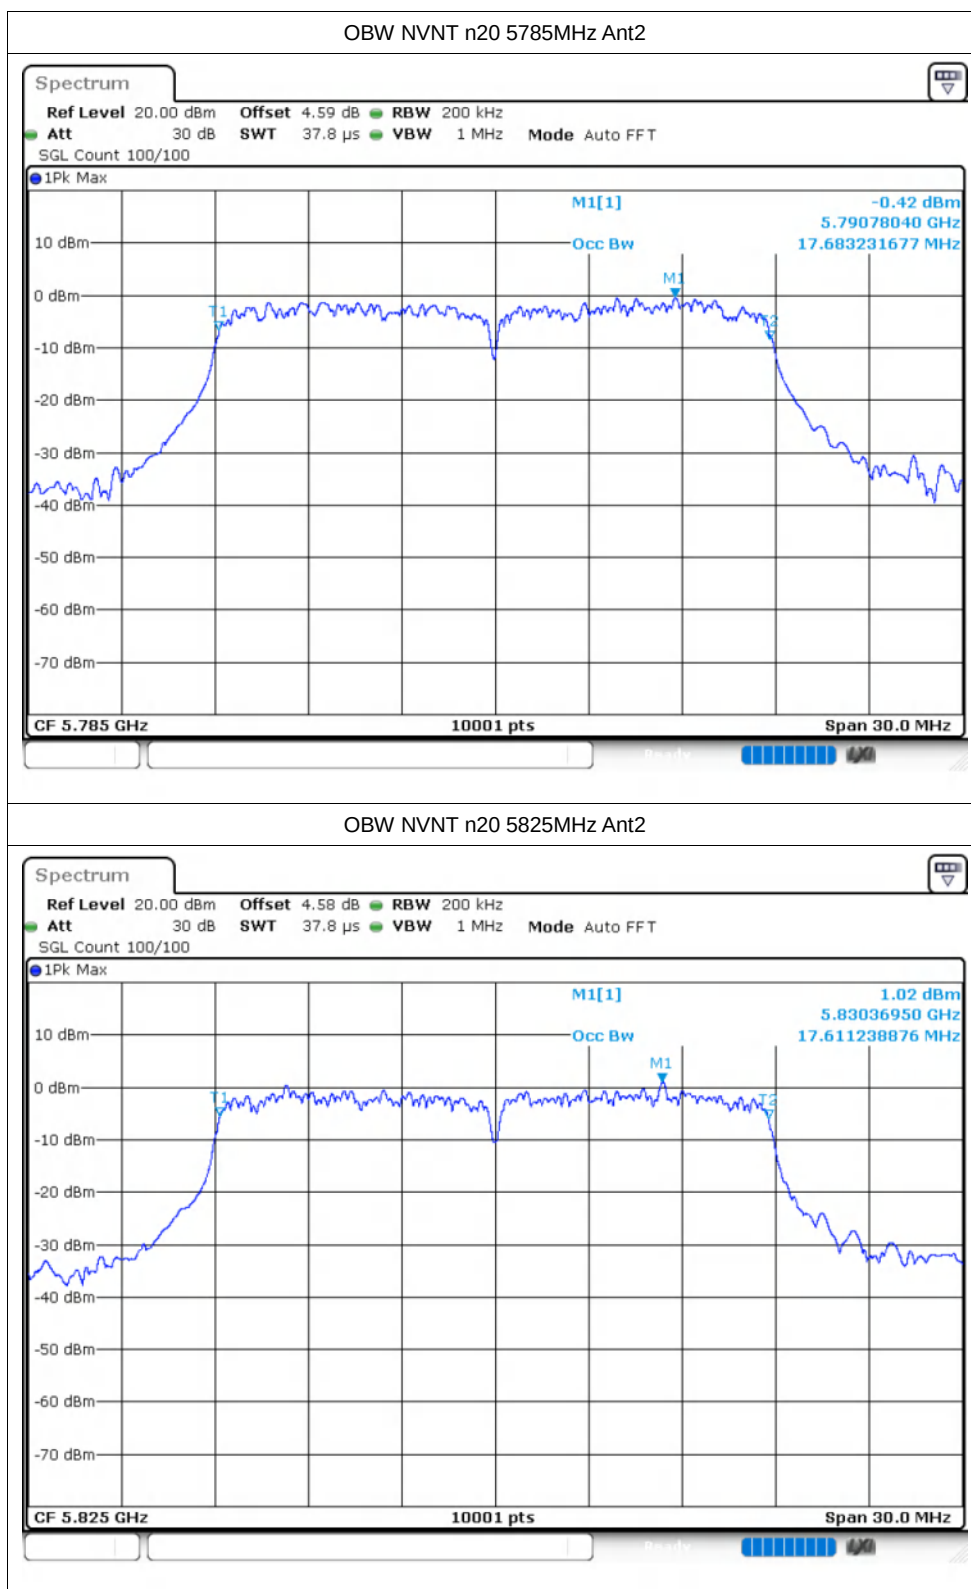


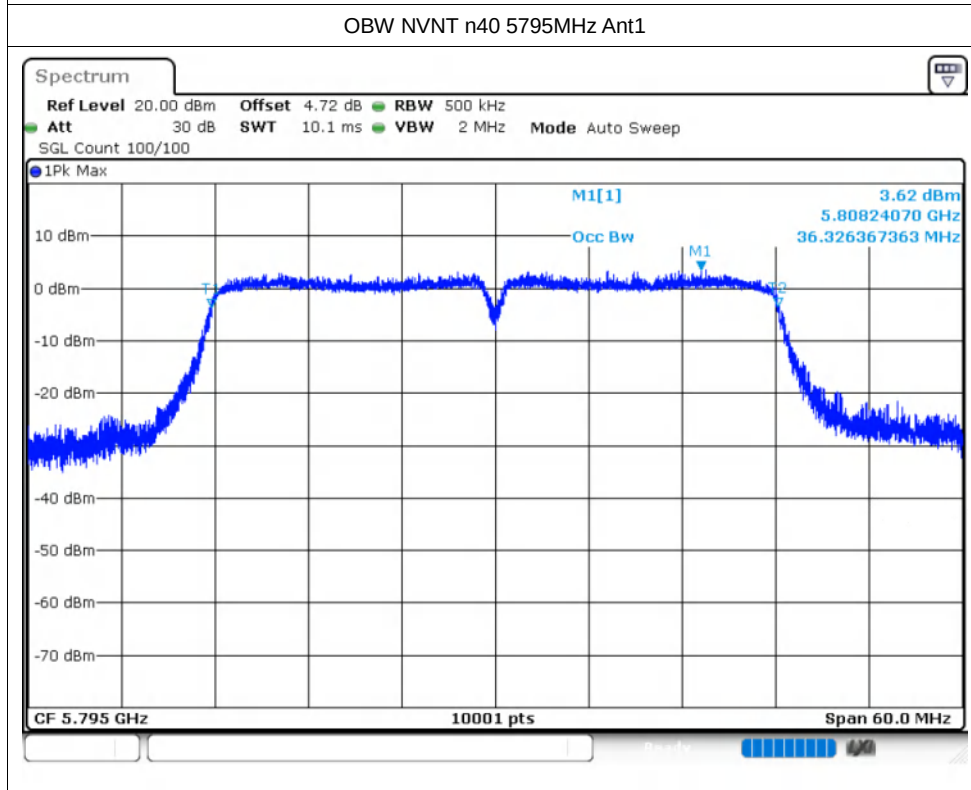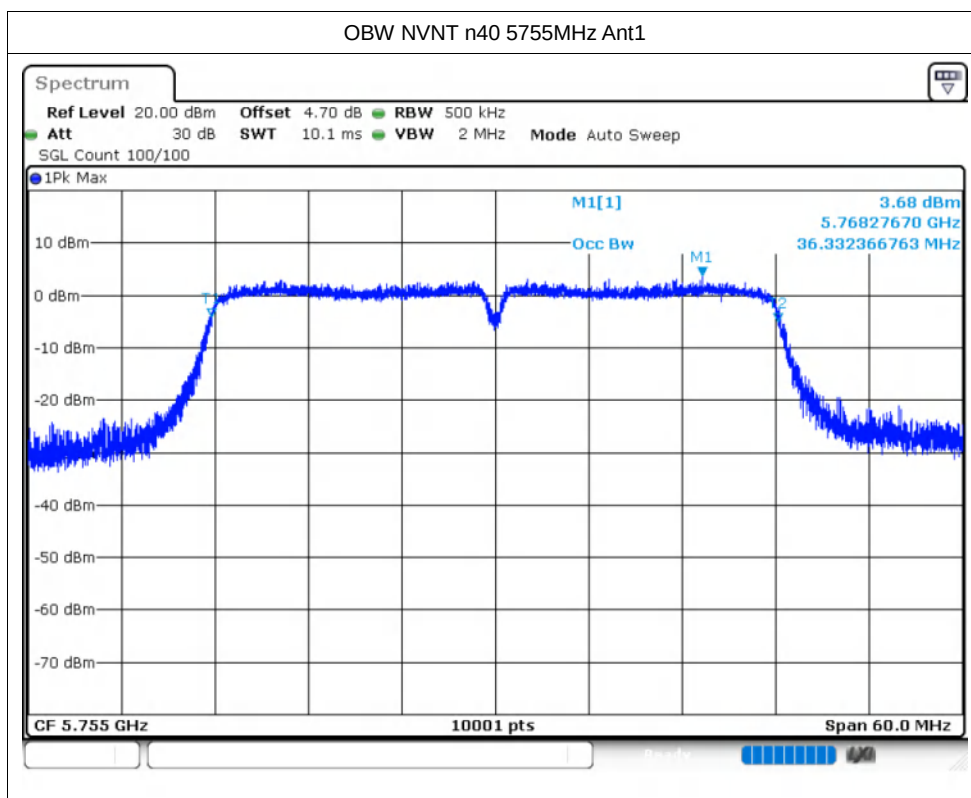


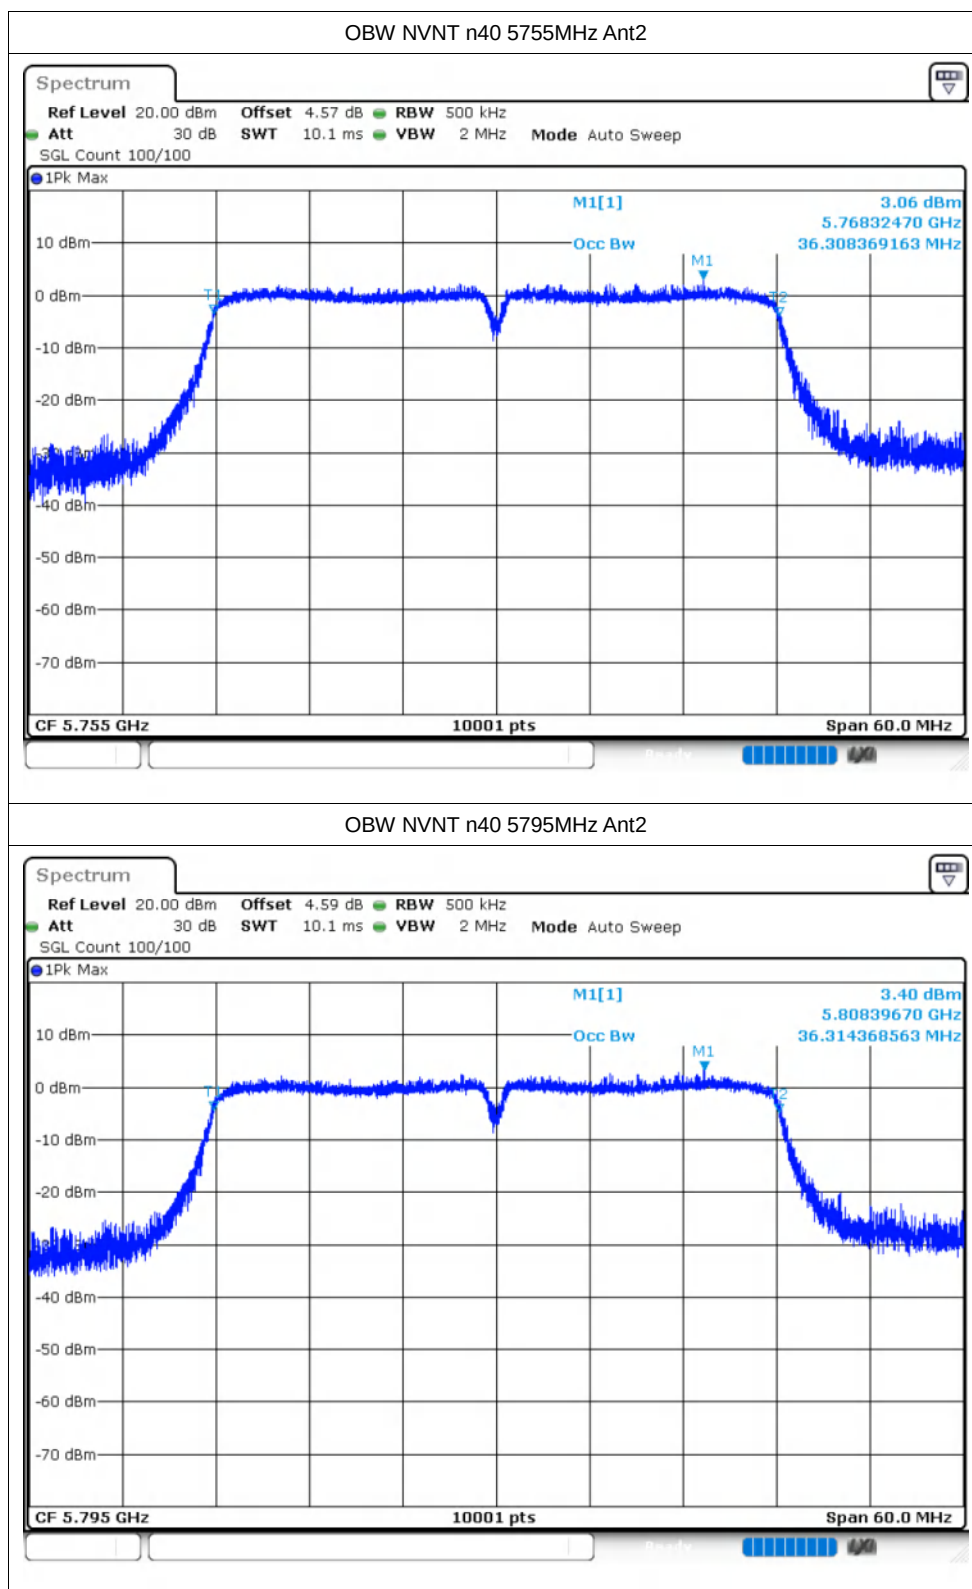


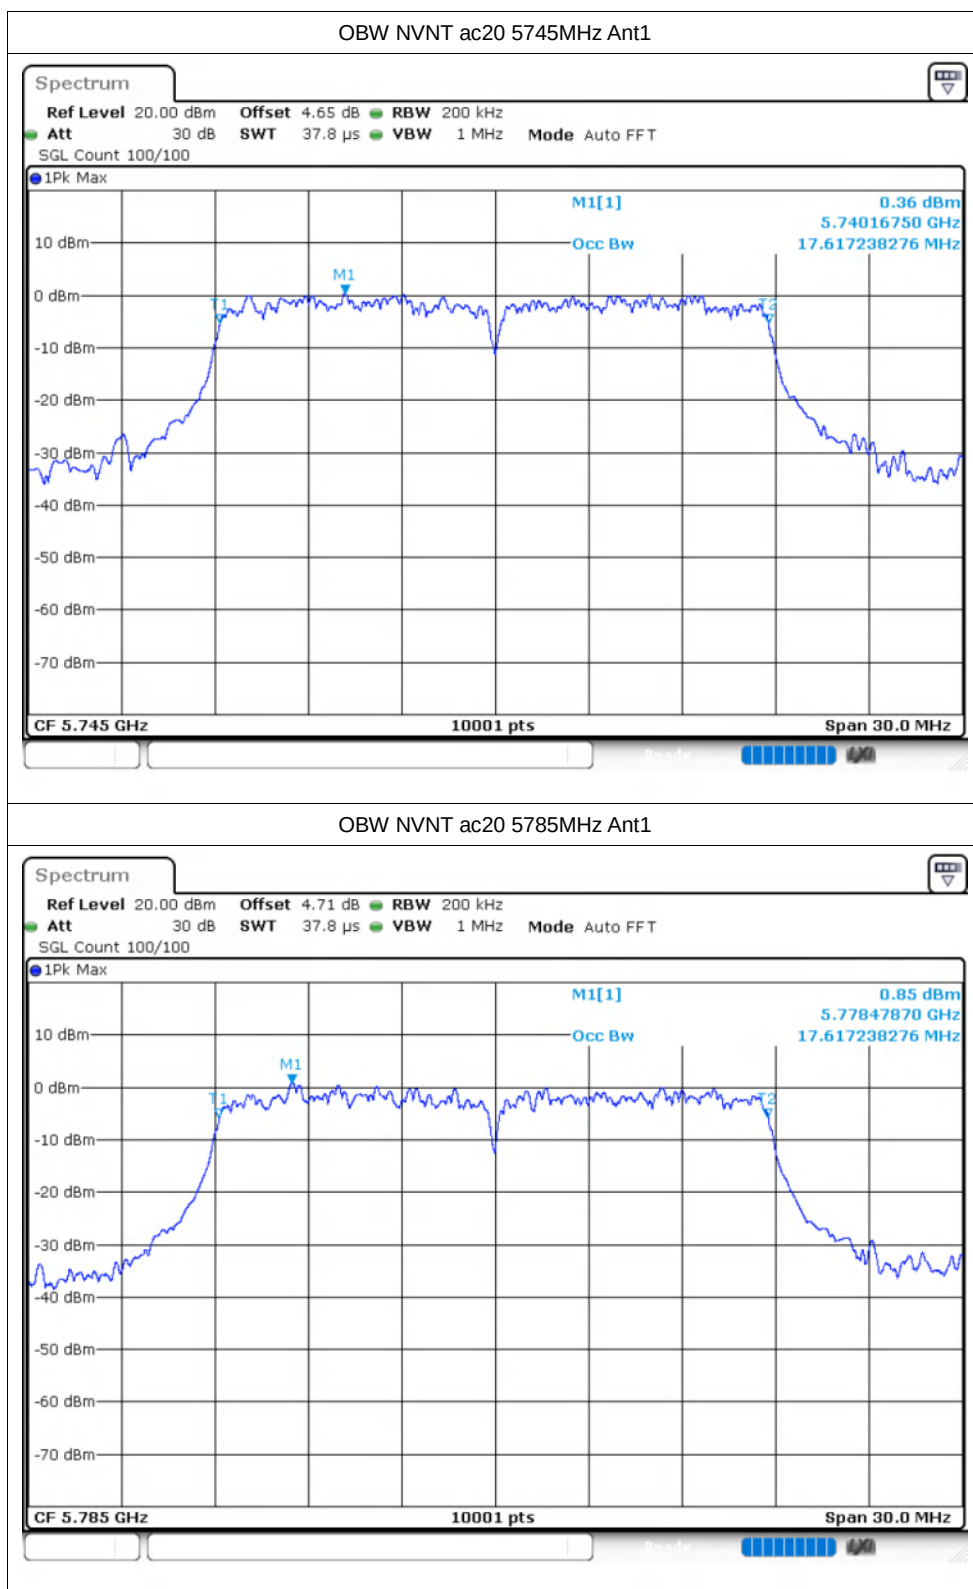


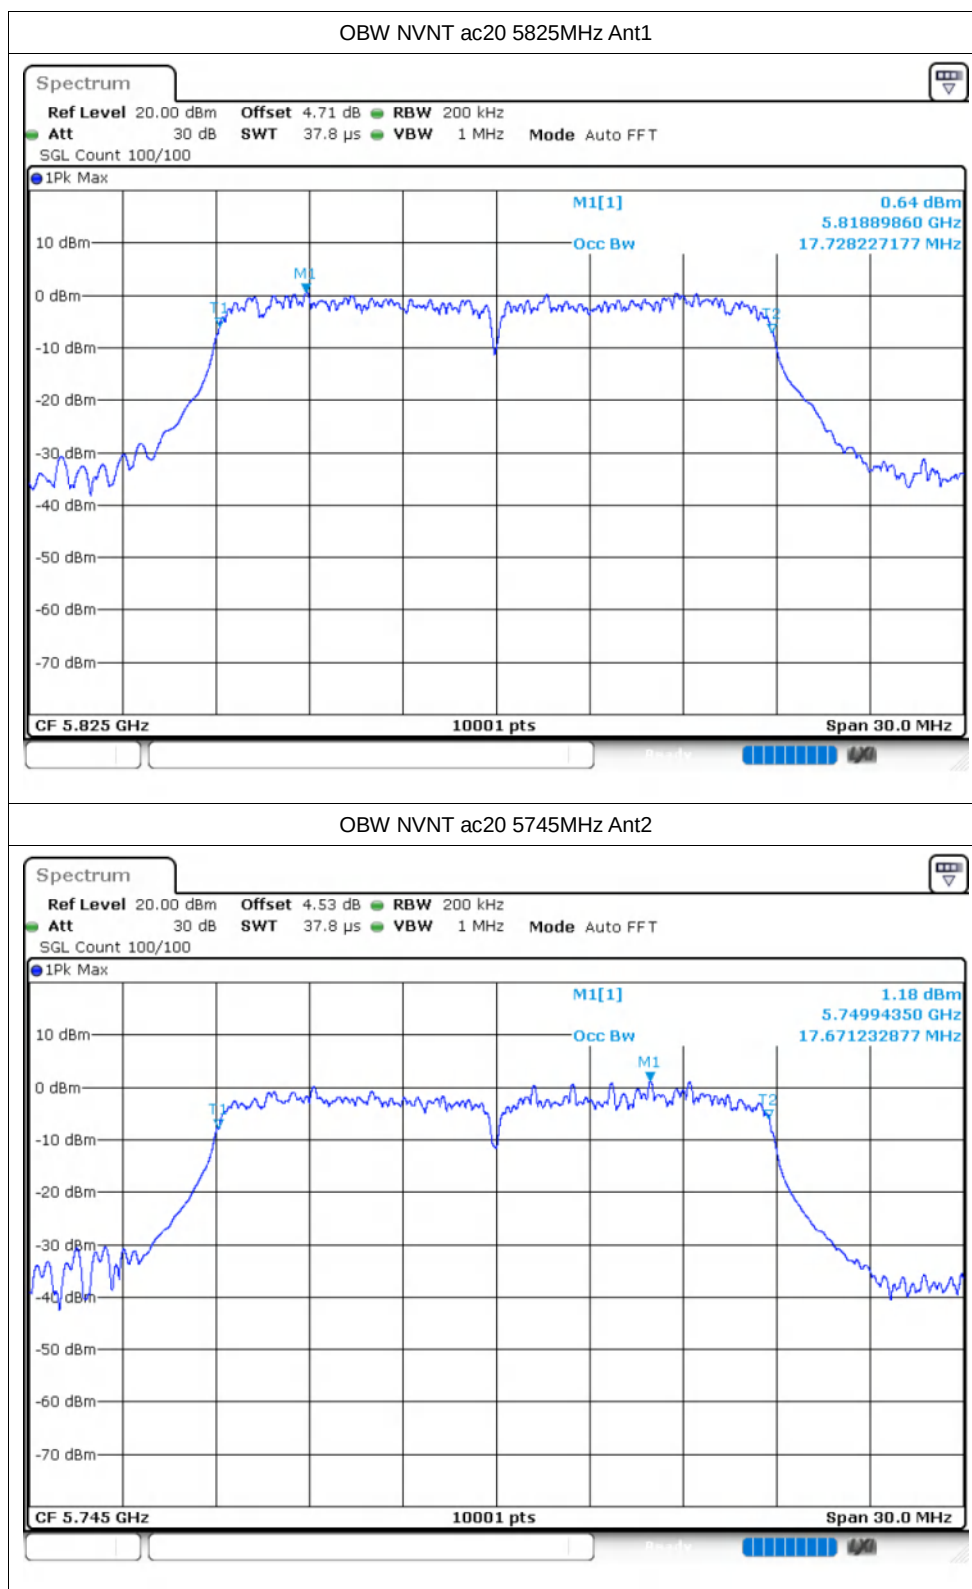

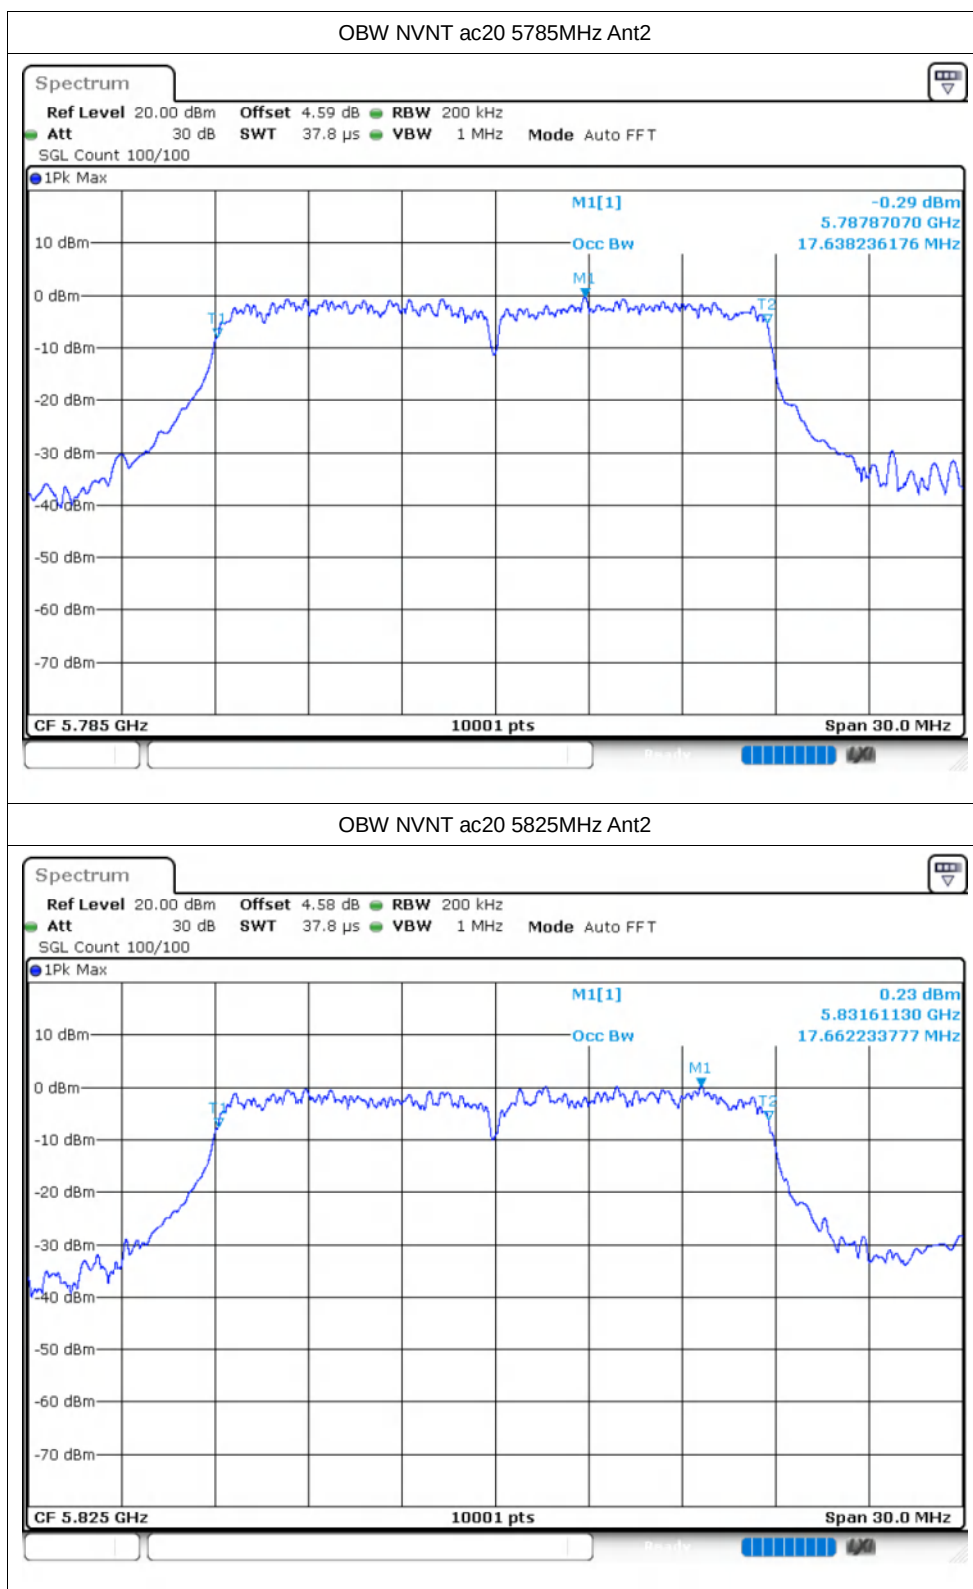

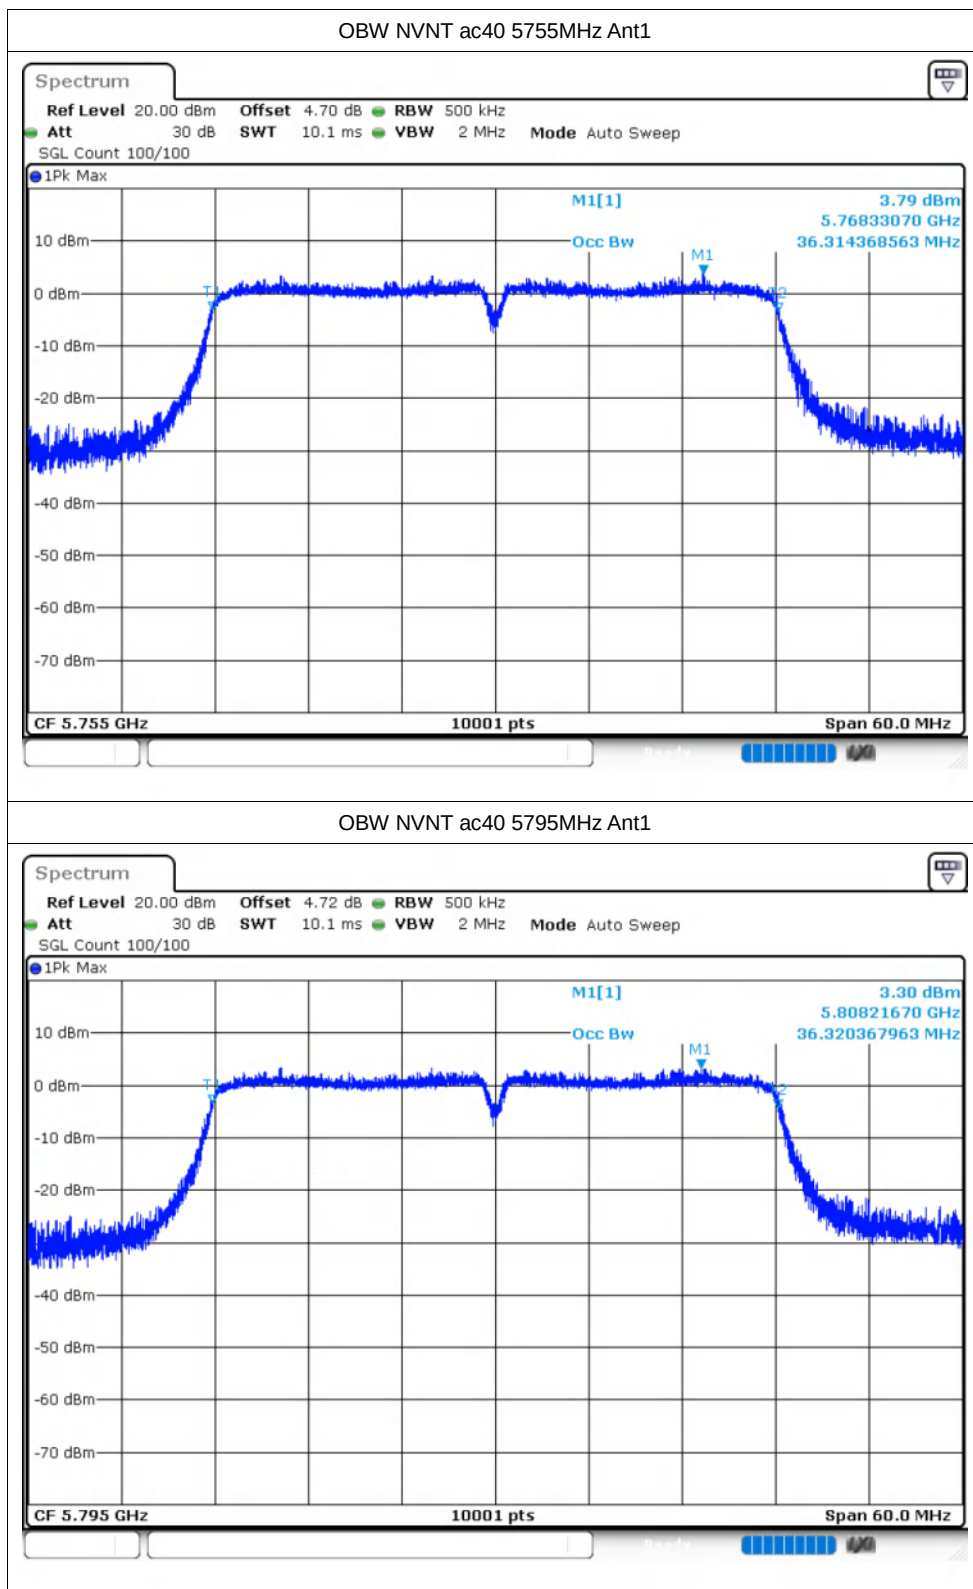

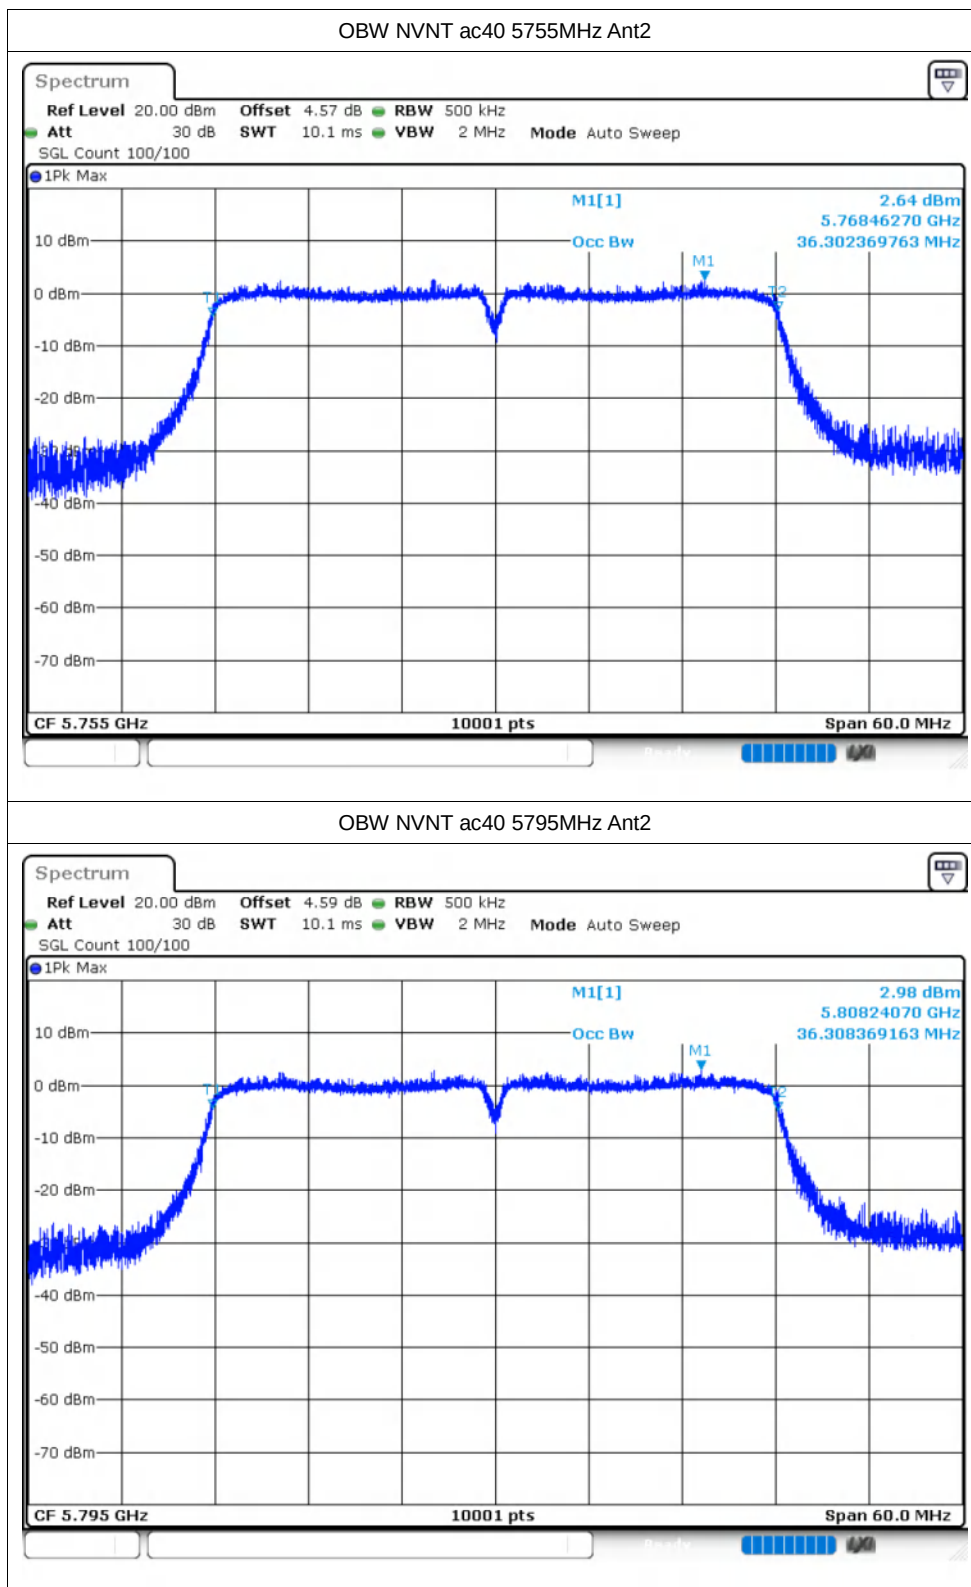

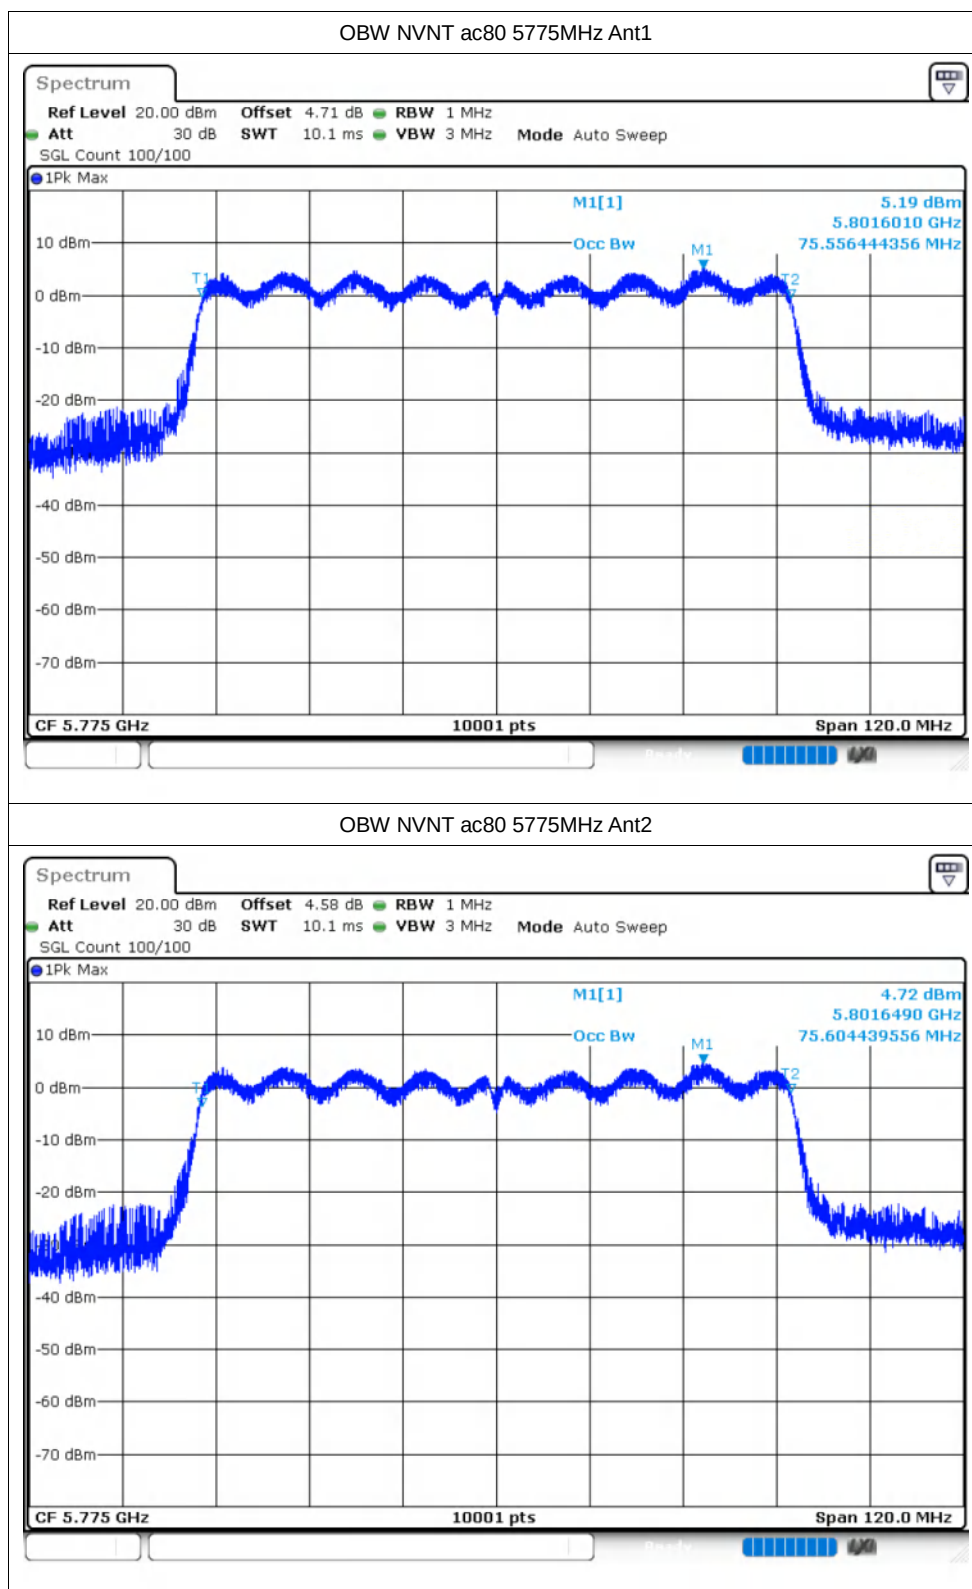


Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-2.38	0.71	-1.67	30	Pass
NVNT	a	5785	Ant1	-2.22	0.75	-1.47	30	Pass
NVNT	a	5825	Ant1	-2.26	0.75	-1.51	30	Pass
NVNT	a	5745	Ant2	-3.03	0.71	-2.32	30	Pass
NVNT	a	5785	Ant2	-2.84	0.71	-2.13	30	Pass
NVNT	a	5825	Ant2	-2.58	0.75	-1.83	30	Pass
NVNT	n20	5745	Ant1	-2.76	0.8	-1.96	30	Pass
NVNT	n20	5785	Ant1	-2.45	0.8	-1.65	30	Pass
NVNT	n20	5825	Ant1	-2.6	0.8	-1.8	30	Pass
NVNT	n20	5745	Ant2	-3.42	0.8	-2.62	30	Pass
NVNT	n20	5785	Ant2	-3.12	0.8	-2.32	30	Pass
NVNT	n20	5825	Ant2	-2.67	0.75	-1.92	30	Pass
NVNT	n40	5755	Ant1	-5.57	1.53	-4.04	30	Pass
NVNT	n40	5795	Ant1	-4.91	1.48	-3.43	30	Pass
NVNT	n40	5755	Ant2	-6.16	1.48	-4.68	30	Pass
NVNT	n40	5795	Ant2	-5.57	1.49	-4.08	30	Pass
NVNT	ac20	5745	Ant1	-2.76	0.75	-2.01	30	Pass
NVNT	ac20	5785	Ant1	-2.62	0.8	-1.82	30	Pass
NVNT	ac20	5825	Ant1	-3.1	0.78	-2.32	30	Pass
NVNT	ac20	5745	Ant2	-3.52	0.8	-2.72	30	Pass
NVNT	ac20	5785	Ant2	-2.96	0.76	-2.2	30	Pass
NVNT	ac20	5825	Ant2	-2.82	0.75	-2.07	30	Pass
NVNT	ac40	5755	Ant1	-5.6	1.52	-4.08	30	Pass
NVNT	ac40	5795	Ant1	-5.13	1.51	-3.62	30	Pass
NVNT	ac40	5755	Ant2	-6.45	1.48	-4.97	30	Pass
NVNT	ac40	5795	Ant2	-5.93	1.53	-4.4	30	Pass
NVNT	ac80	5775	Ant1	-8.29	2.73	-5.56	30	Pass
NVNT	ac80	5775	Ant2	-8.33	2.72	-5.61	30	Pass


Test Graphs



PSD NVNT a 5745MHz Ant1

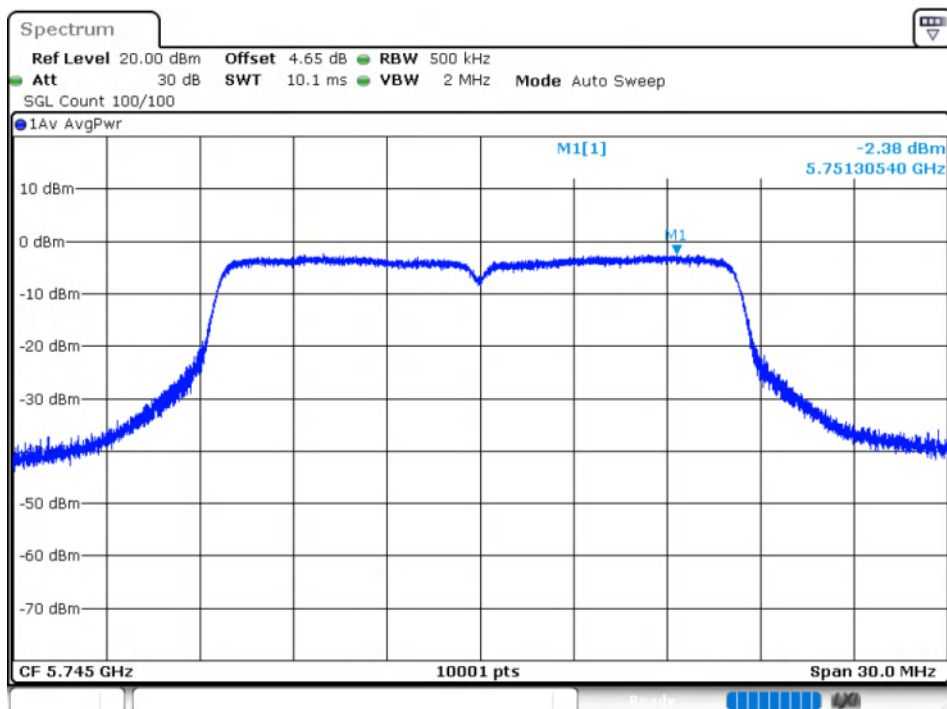



PSD NVNT a 5785MHz Ant1

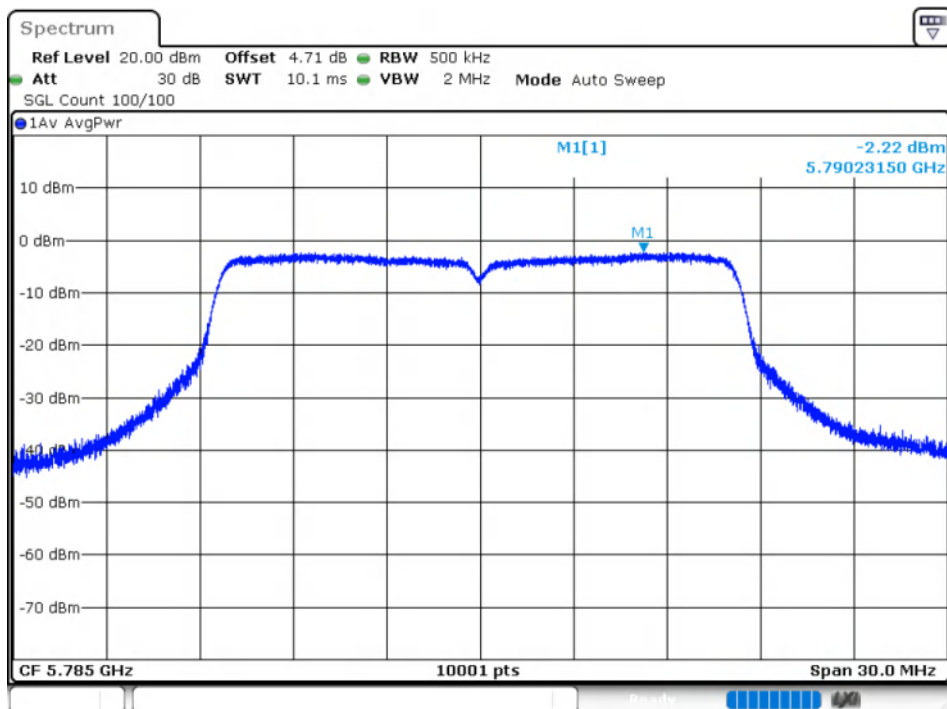


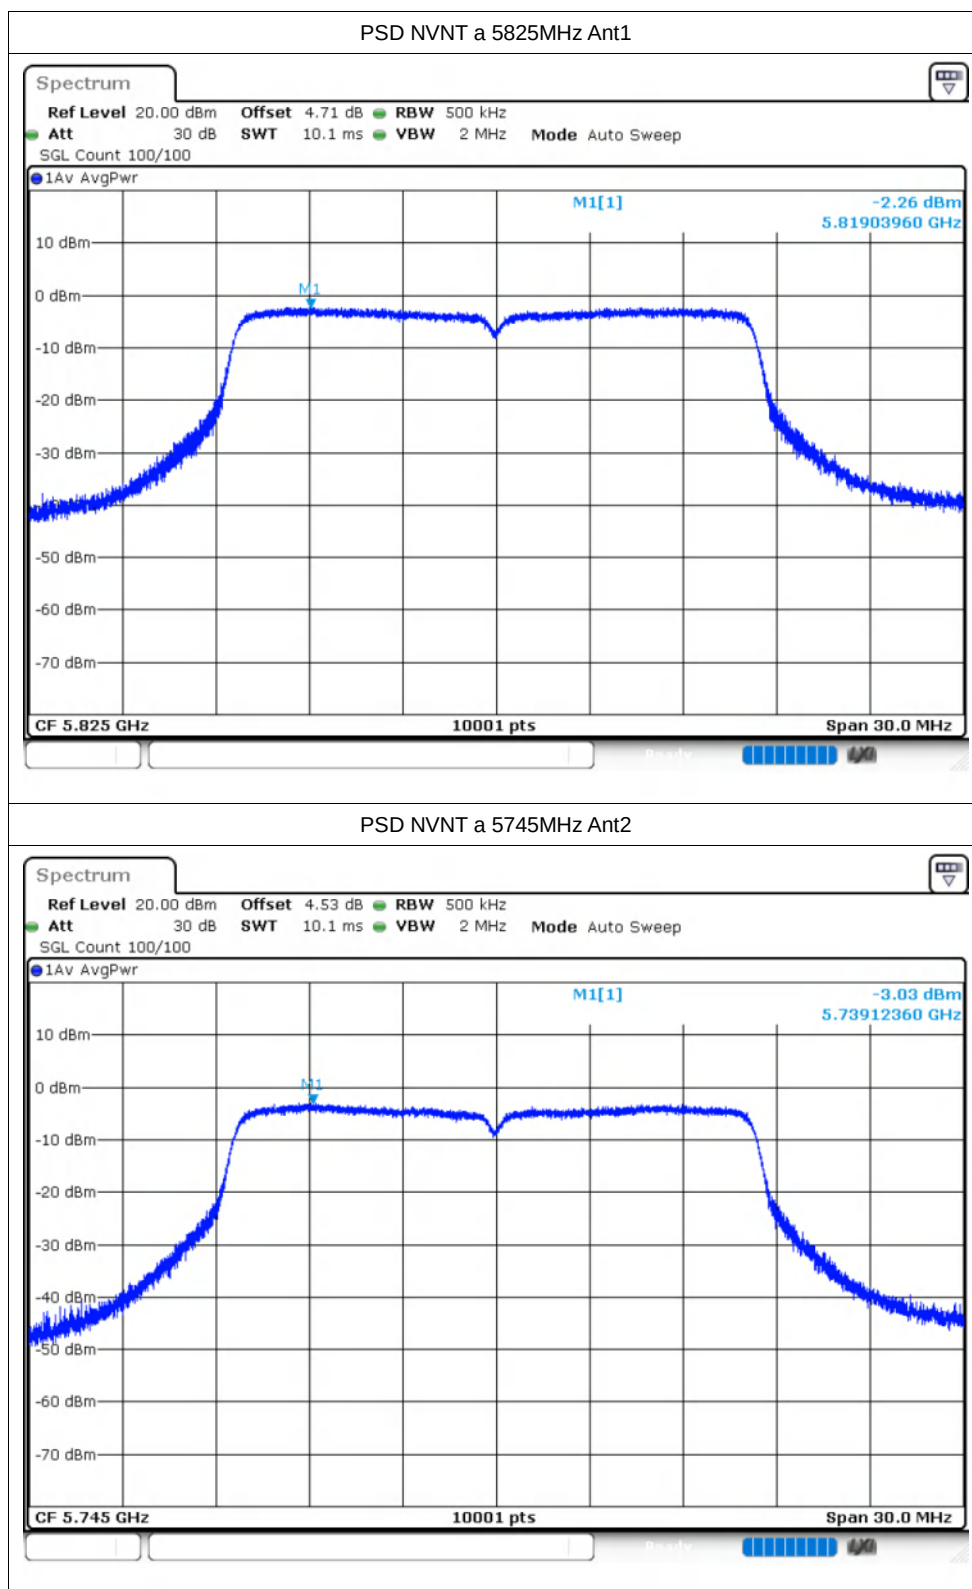


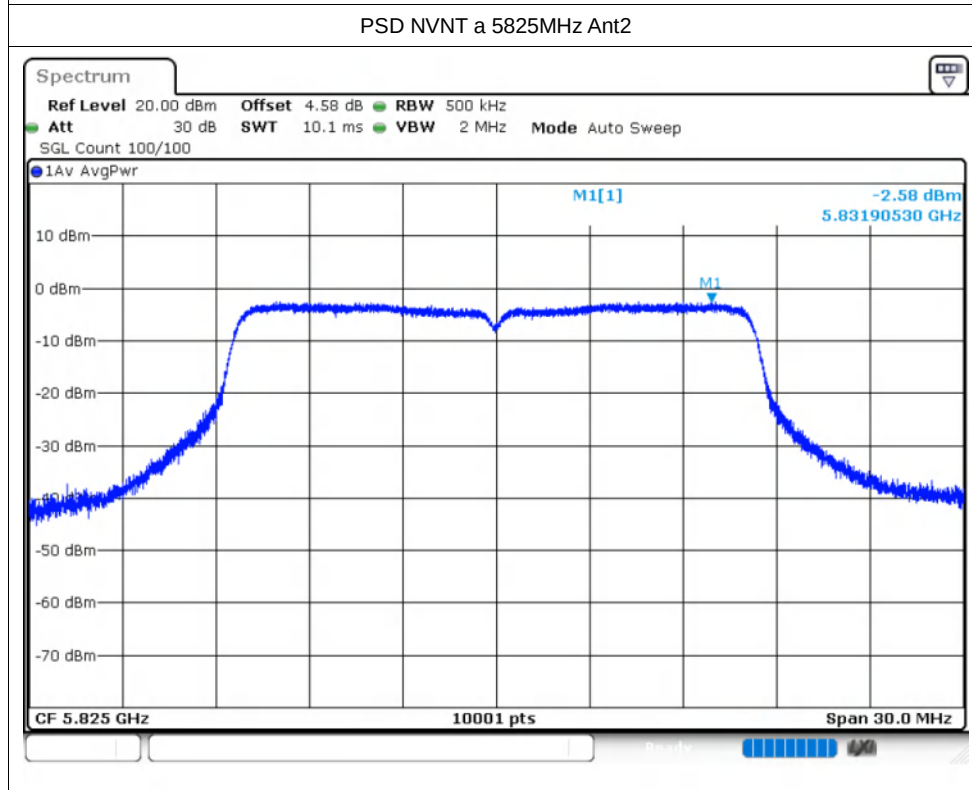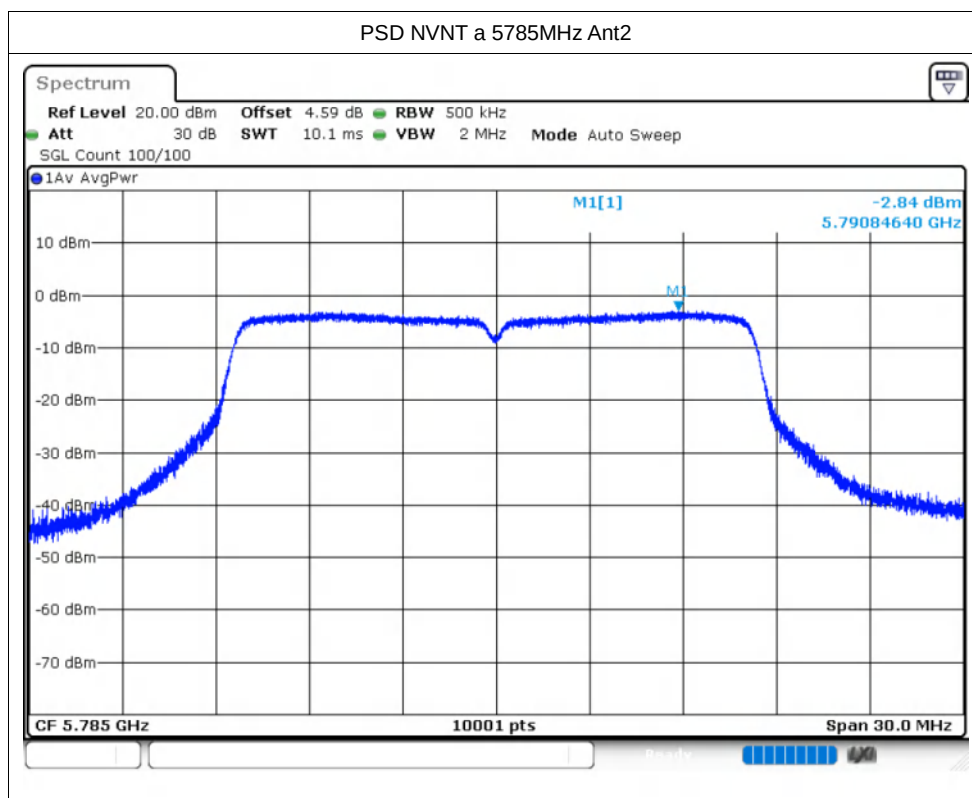


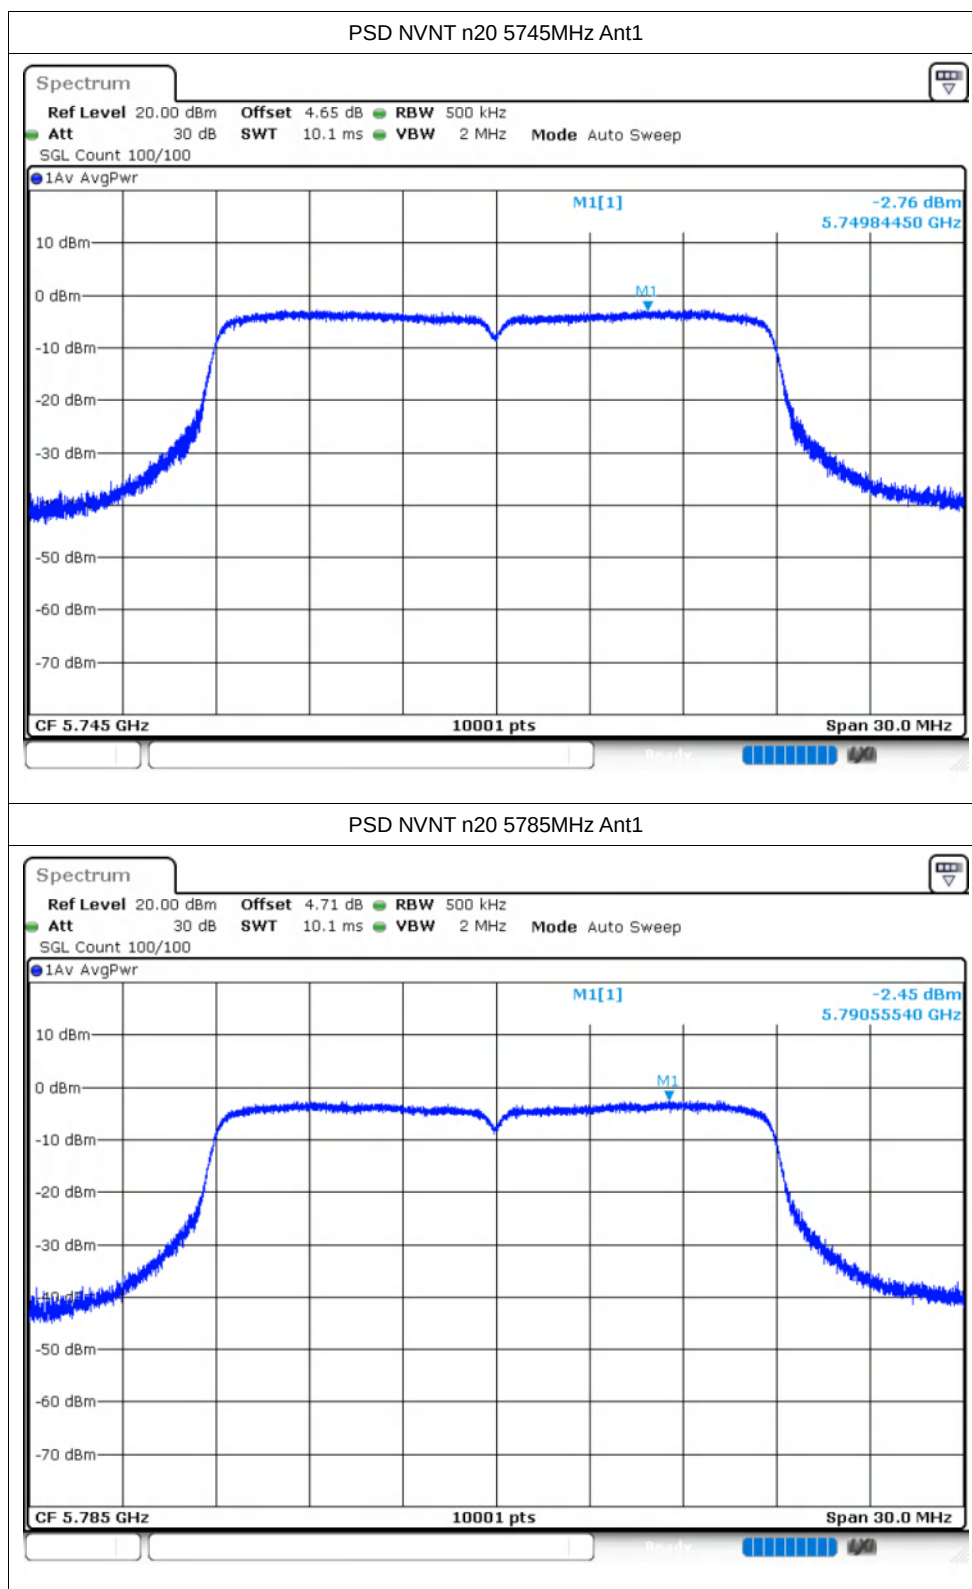


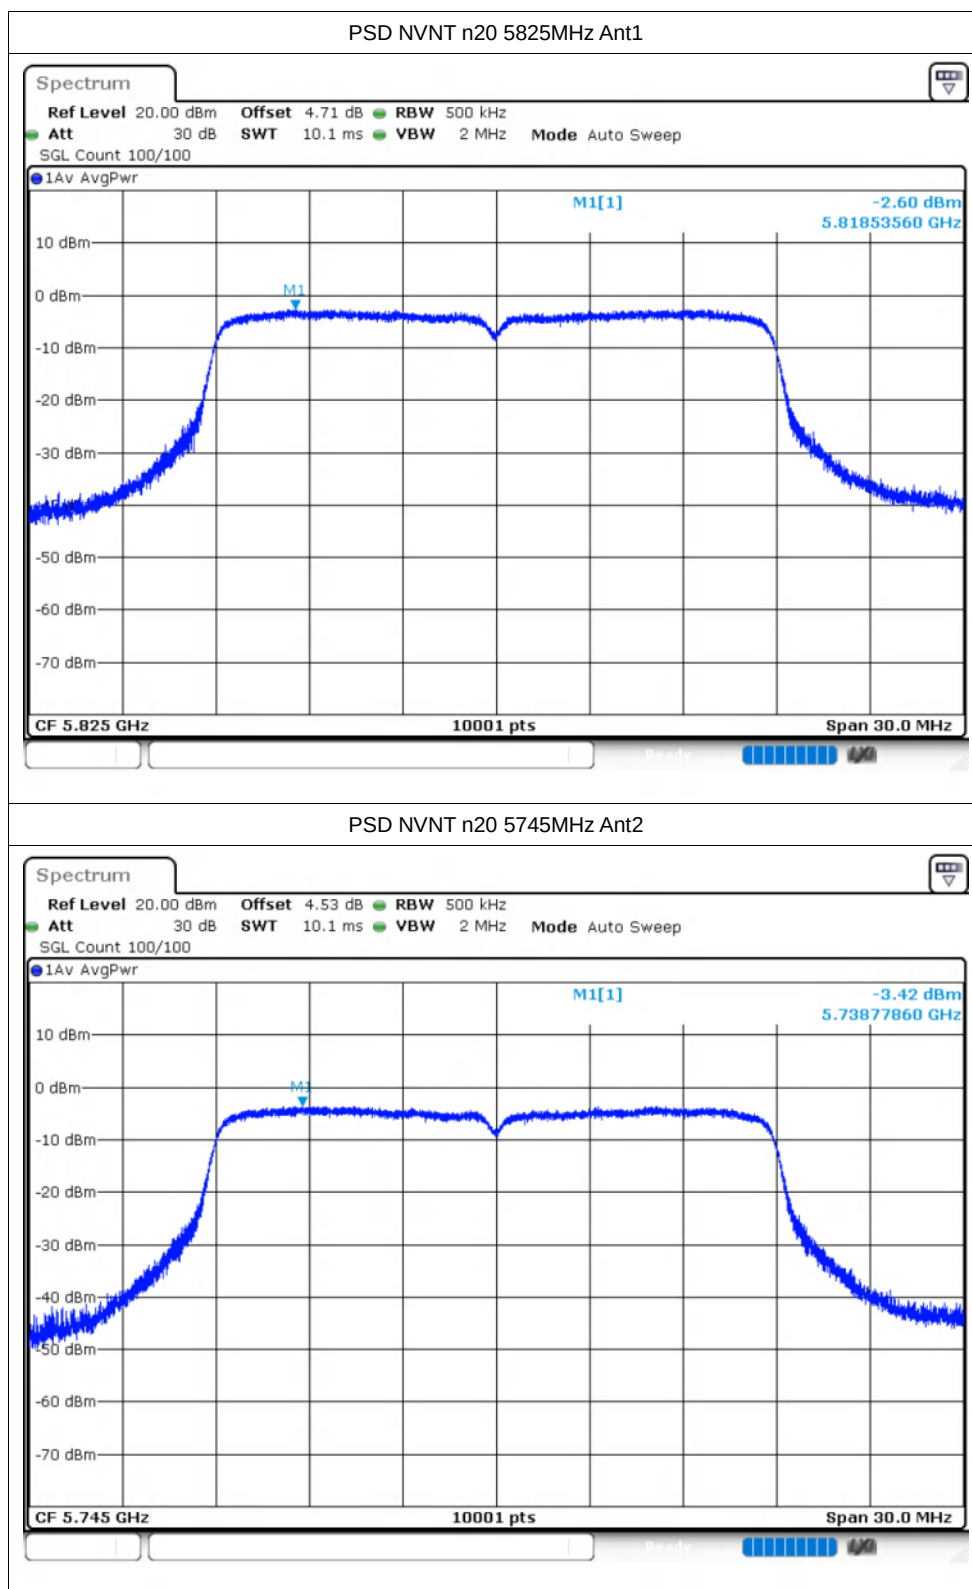


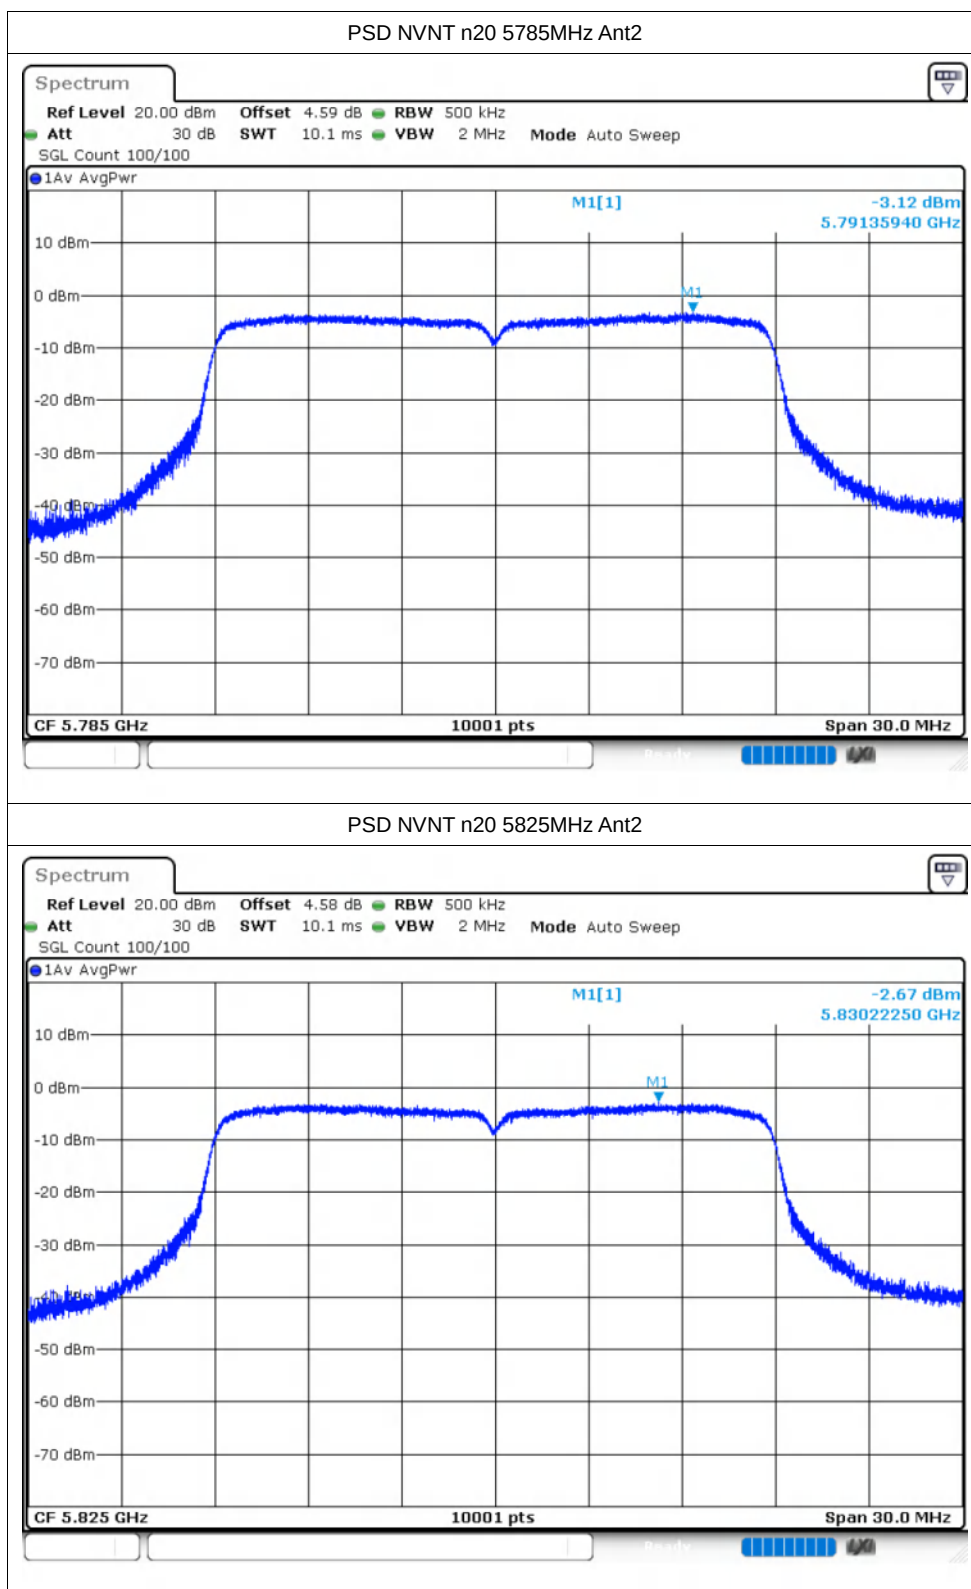


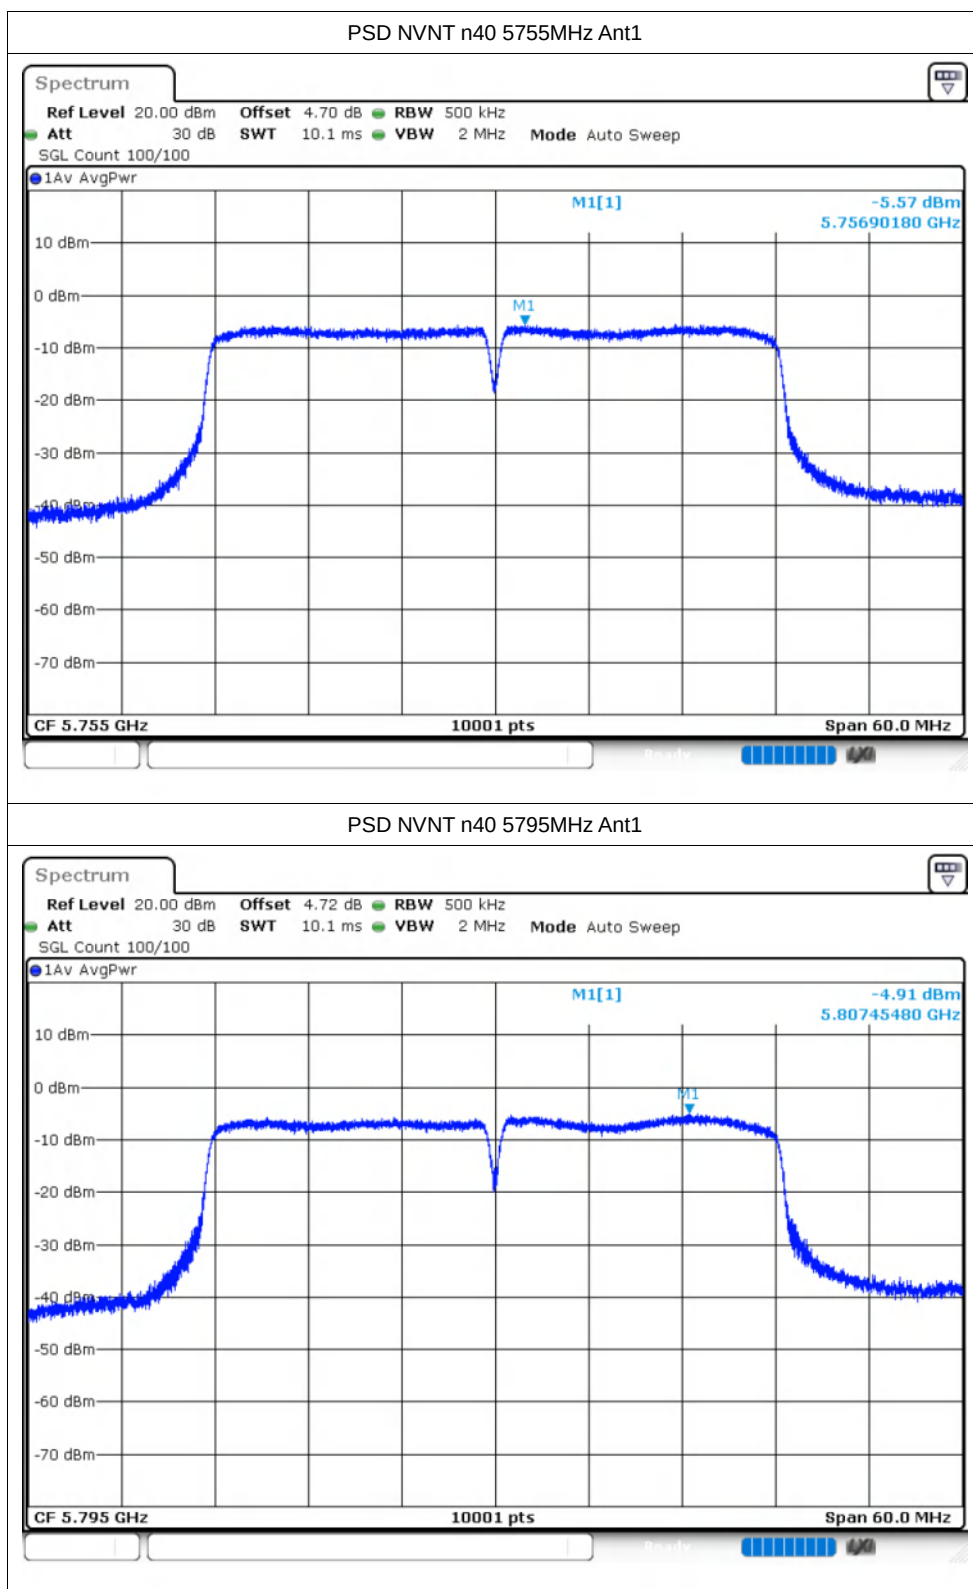


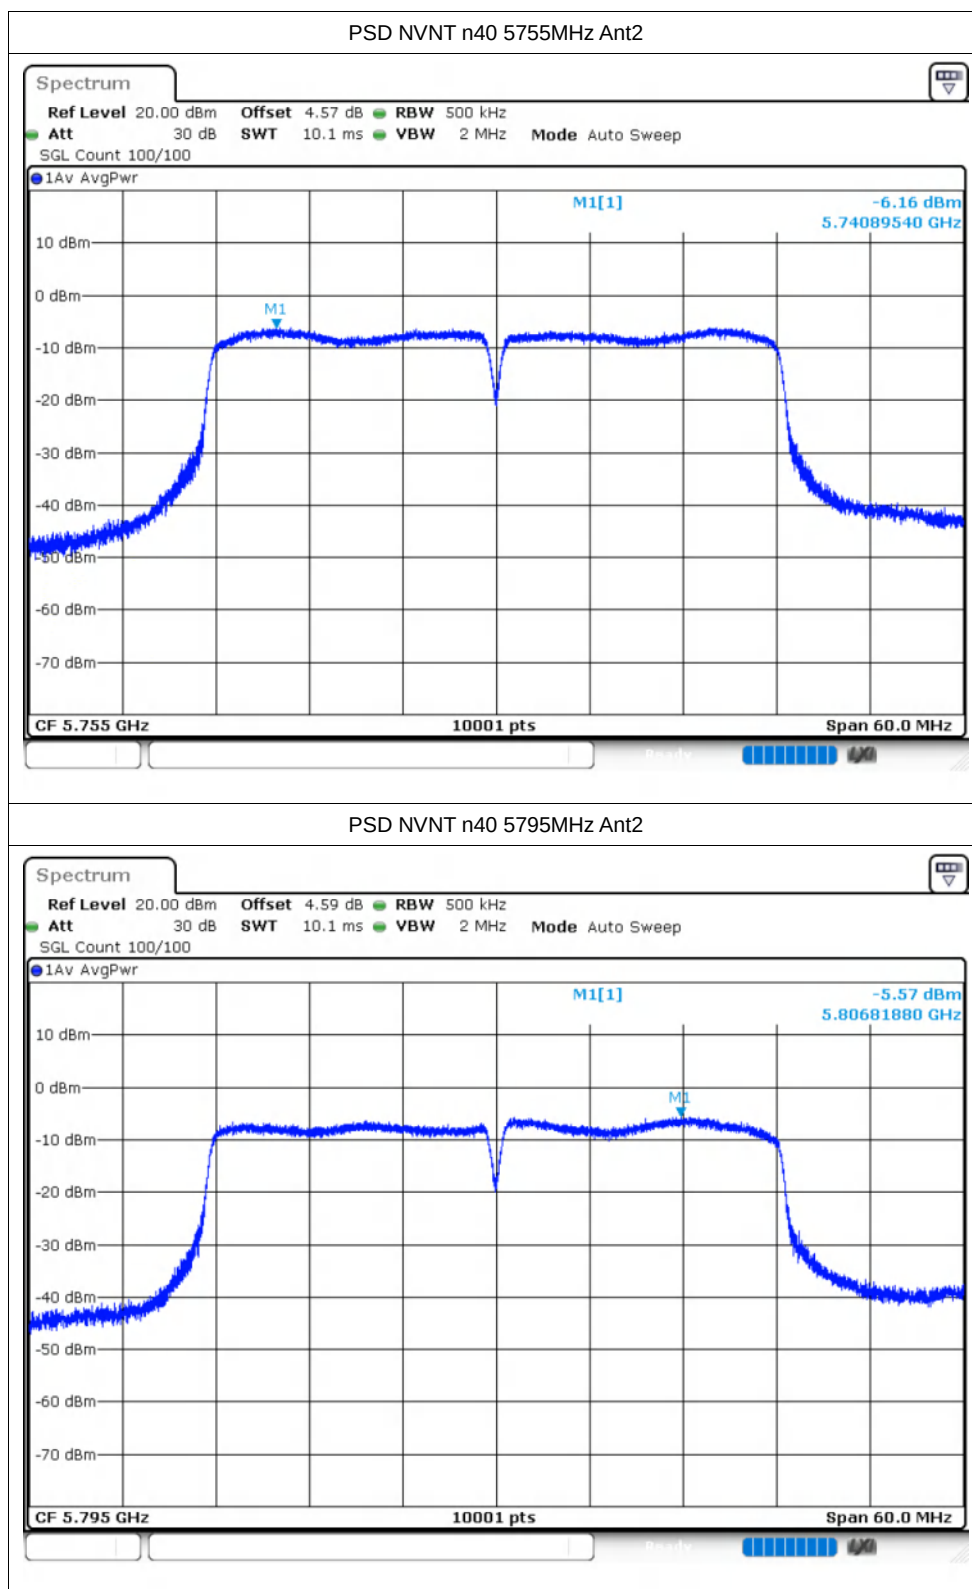



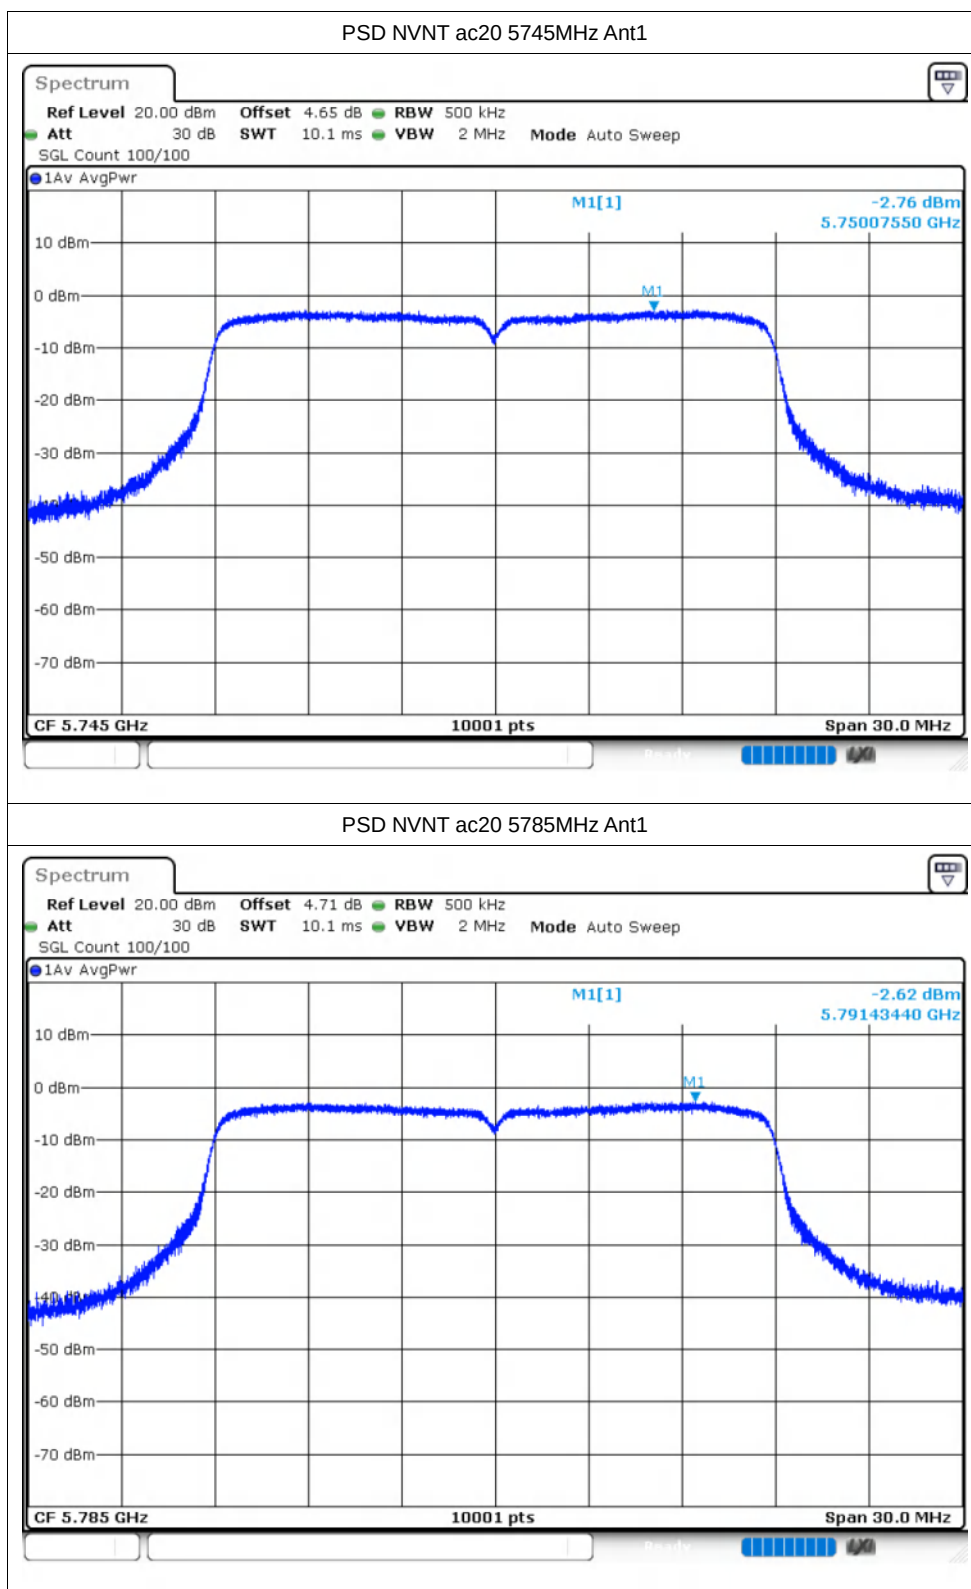


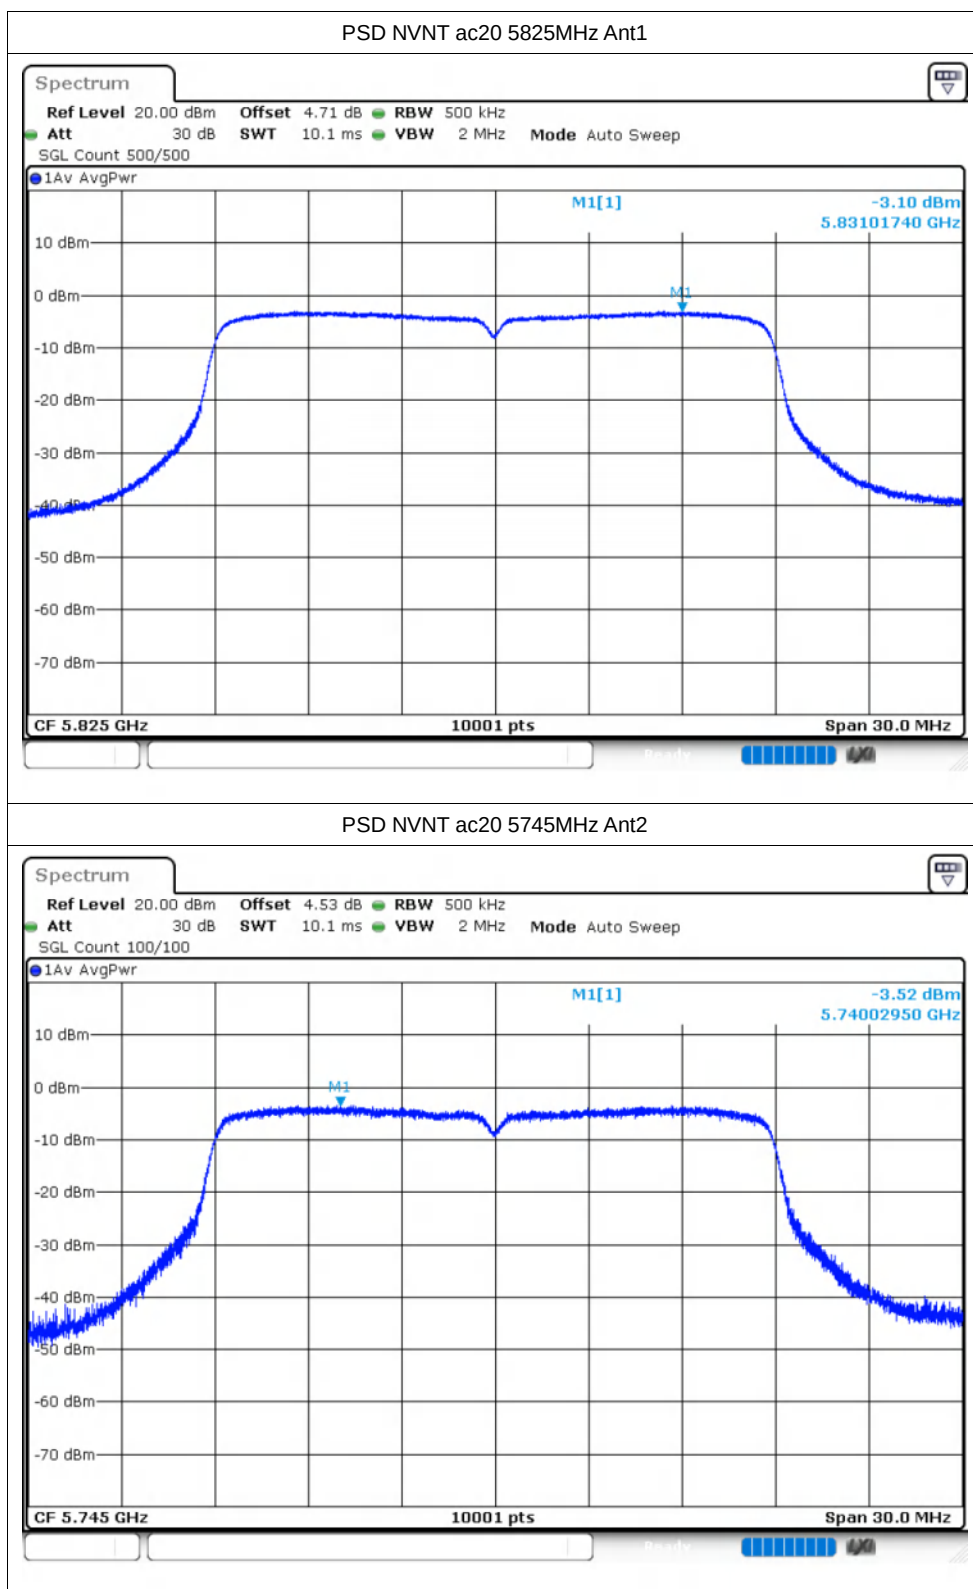

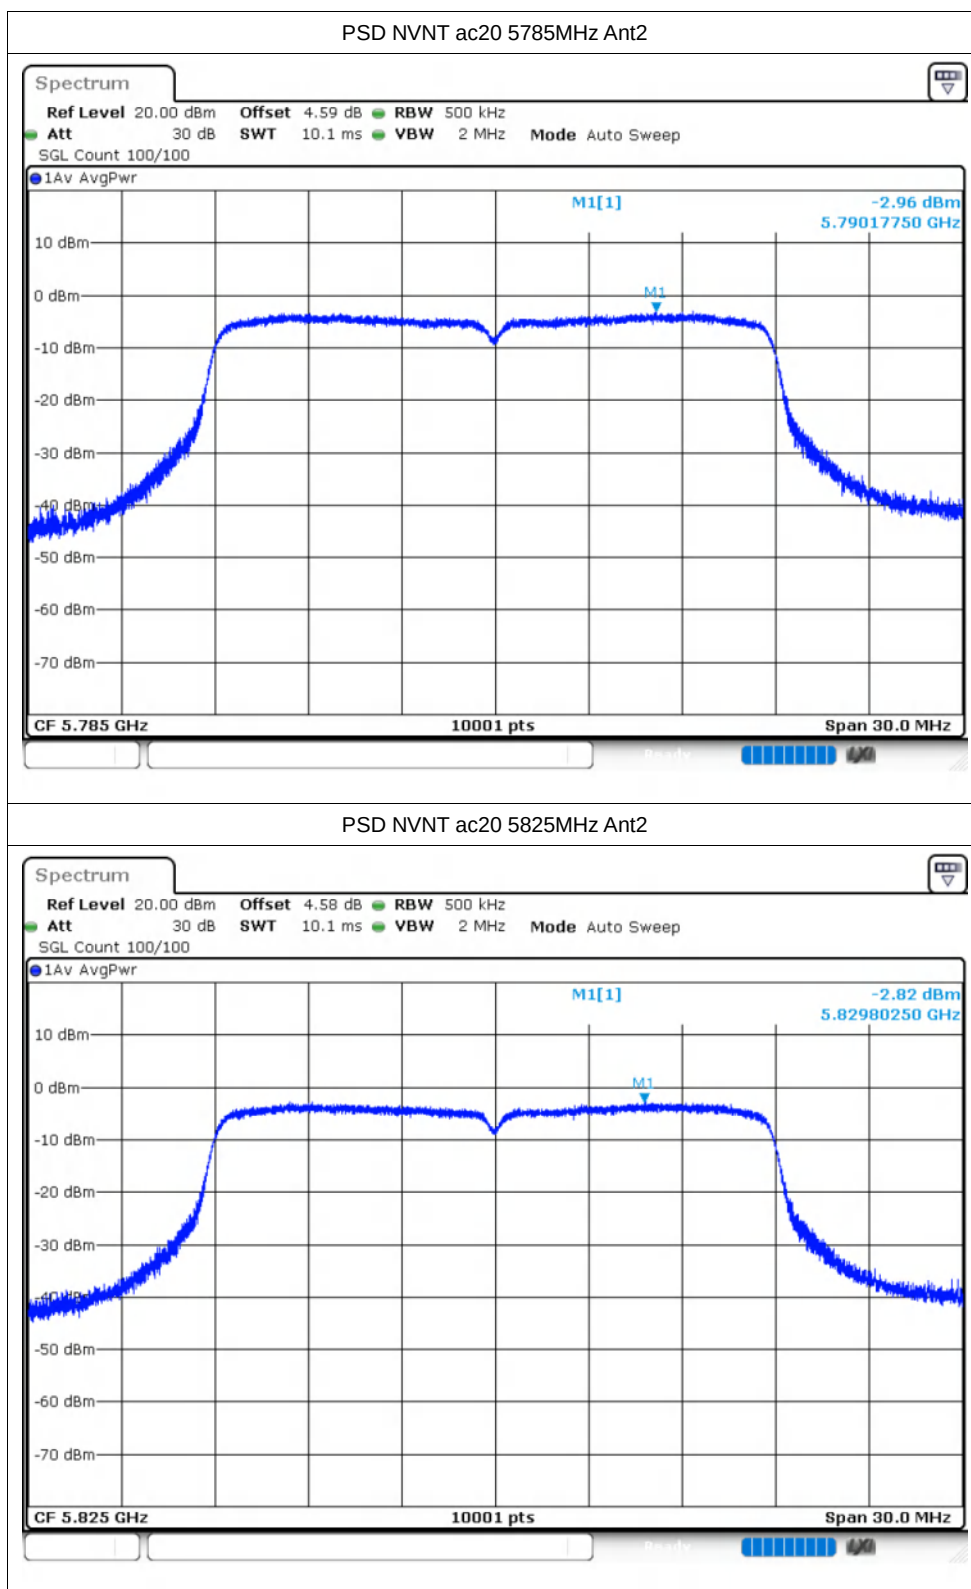

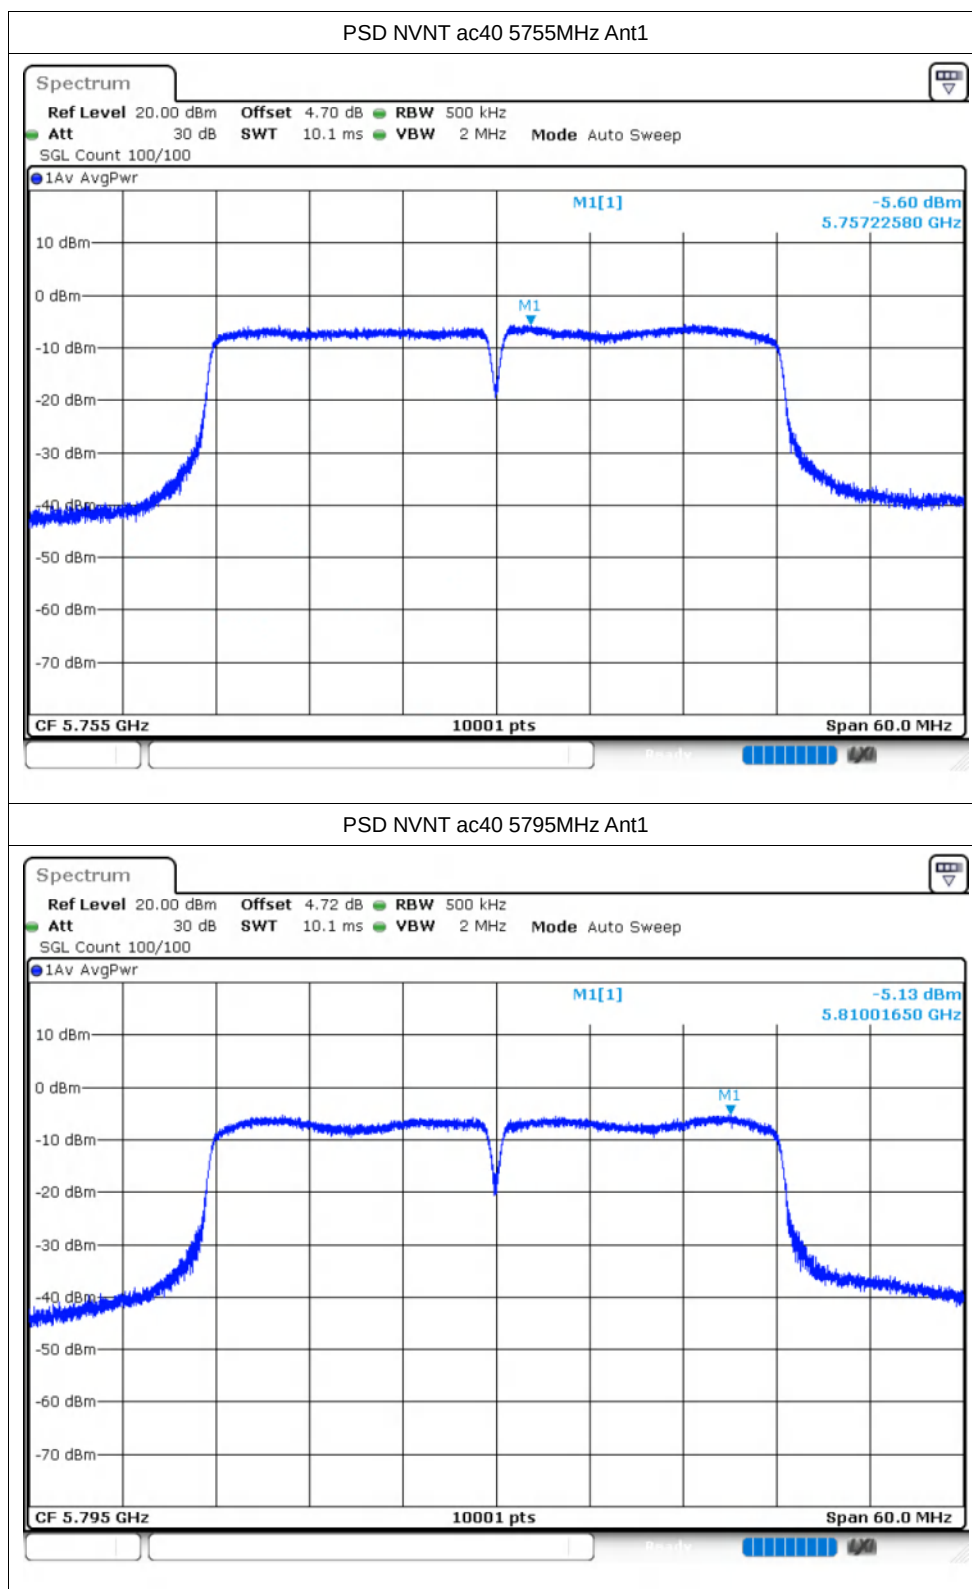

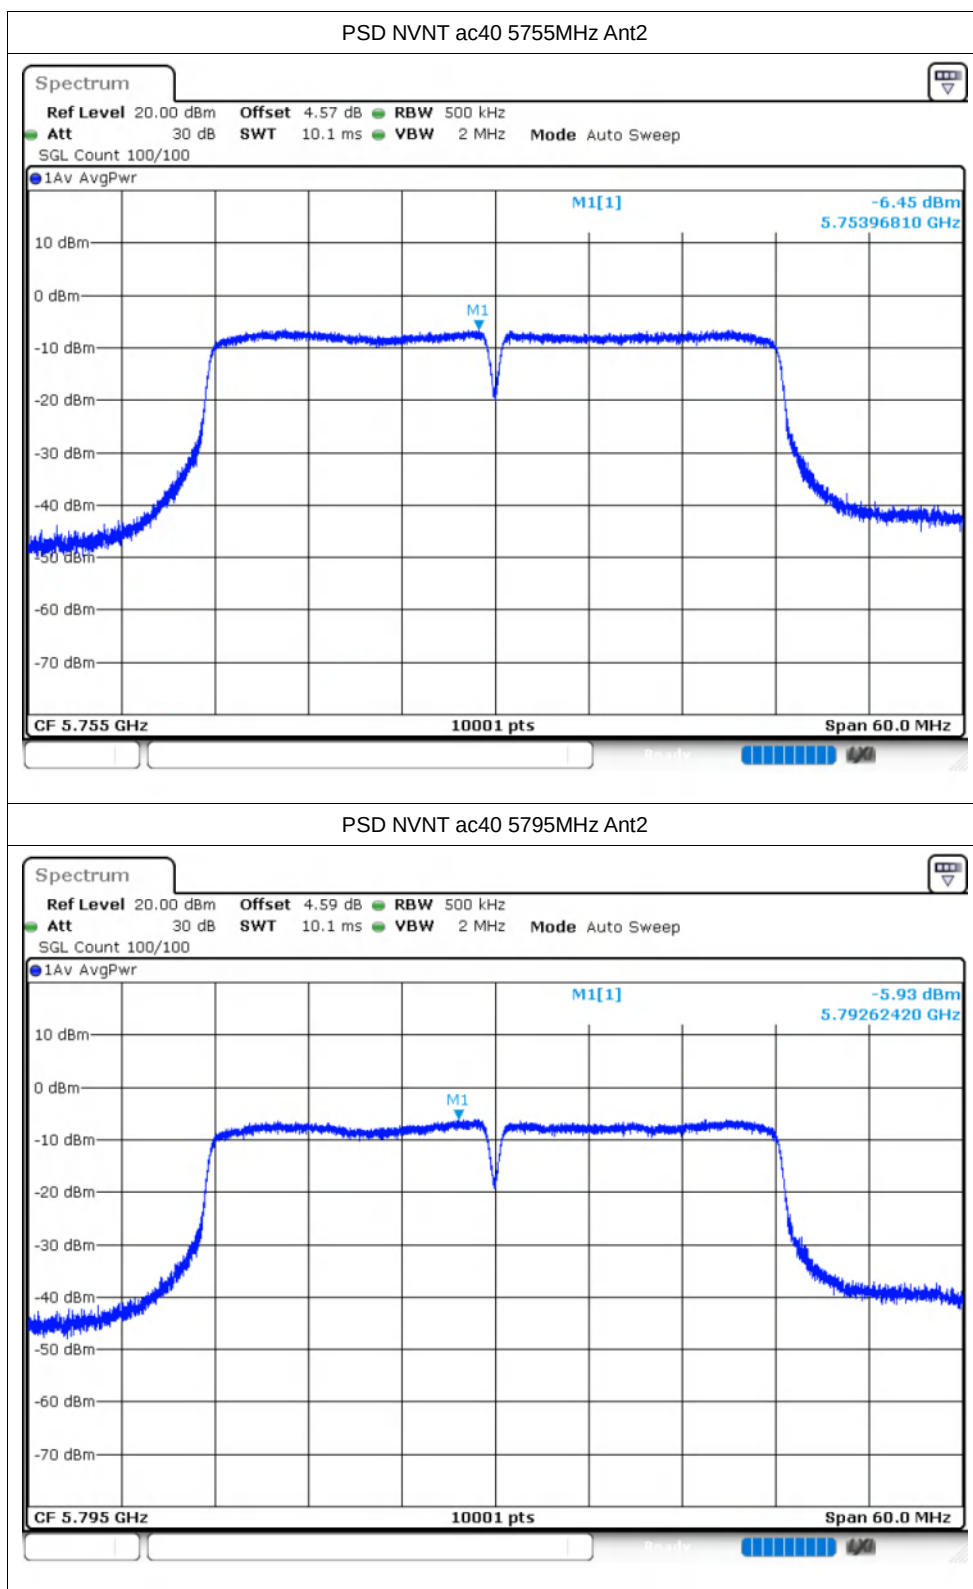

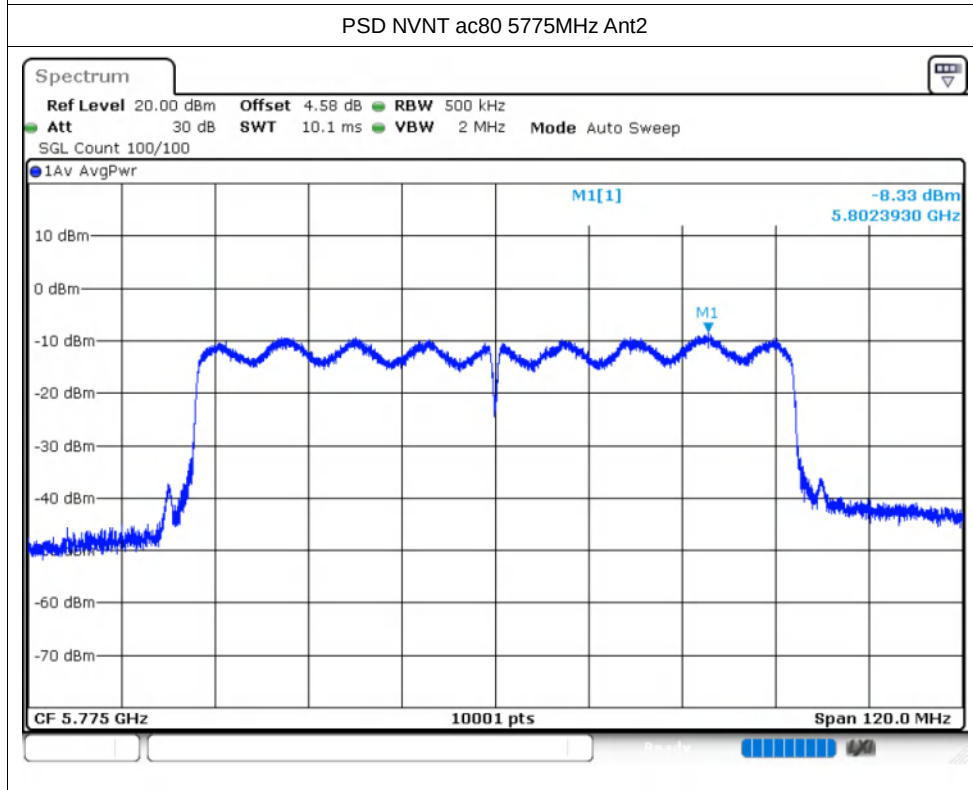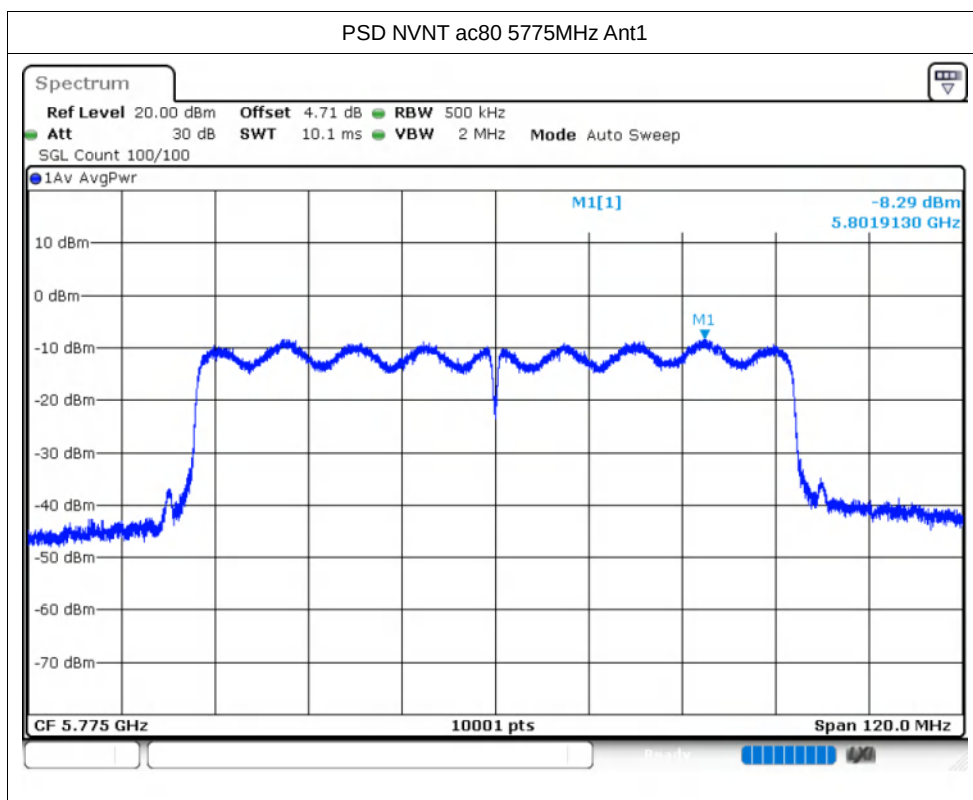


Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-36.38	-26.97	Pass
NVNT	a	5825	Ant1	-34.14	-27	Pass
NVNT	a	5745	Ant2	-37.46	-27	Pass
NVNT	a	5825	Ant2	-36.39	-27	Pass
NVNT	n20	5745	Ant1	-36.13	-27	Pass
NVNT	n20	5825	Ant1	-34.34	-27	Pass
NVNT	n20	5745	Ant2	-37.07	-25.9	Pass
NVNT	n20	5825	Ant2	-36.36	-27	Pass
NVNT	n40	5755	Ant1	-35.26	-27	Pass
NVNT	n40	5795	Ant1	-34.11	-27	Pass
NVNT	n40	5755	Ant2	-36.76	-27	Pass
NVNT	n40	5795	Ant2	-36.75	-27	Pass
NVNT	ac20	5745	Ant1	-35.53	-27	Pass
NVNT	ac20	5825	Ant1	-34.35	-27	Pass
NVNT	ac20	5745	Ant2	-37.22	-27	Pass
NVNT	ac20	5825	Ant2	-36.26	-27	Pass
NVNT	ac40	5755	Ant1	-36.34	-27	Pass
NVNT	ac40	5795	Ant1	-34.29	-27	Pass
NVNT	ac40	5755	Ant2	-37.69	-27	Pass
NVNT	ac40	5795	Ant2	-35.45	-27	Pass
NVNT	ac80	5755	Ant1	-34.58	-27	Pass
NVNT	ac80	5755	Ant1	-36.27	-27	Pass
NVNT	ac80	5755	Ant2	-36.66	-27	Pass
NVNT	ac80	5755	Ant2	-36.57	-27	Pass

Test Graphs


Band Edge NVNT a 5745MHz Low Ant1

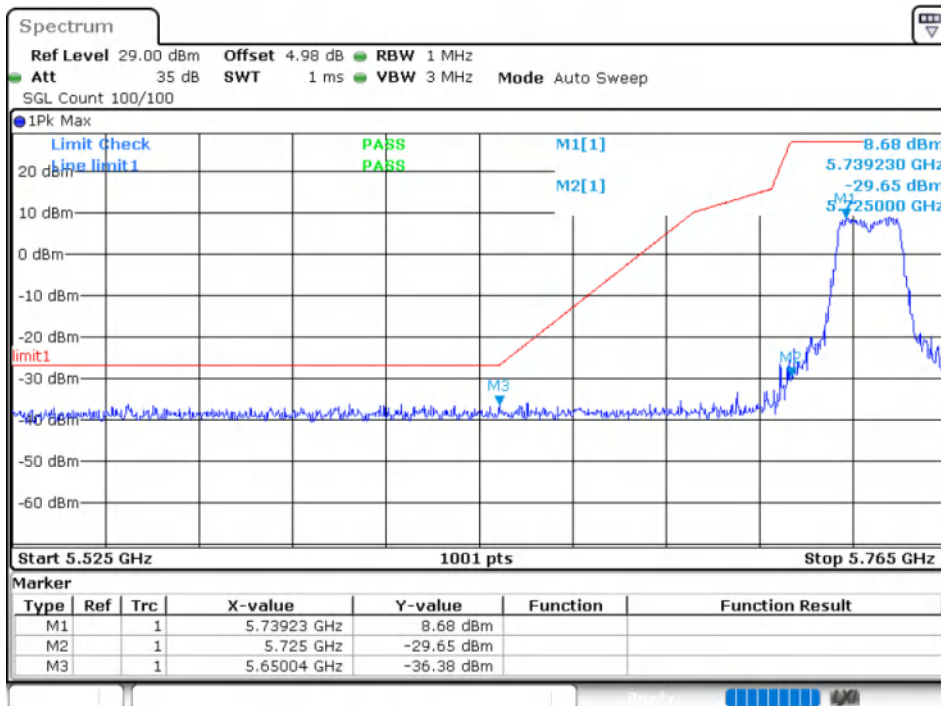


Band Edge NVNT a 5825MHz High Ant1

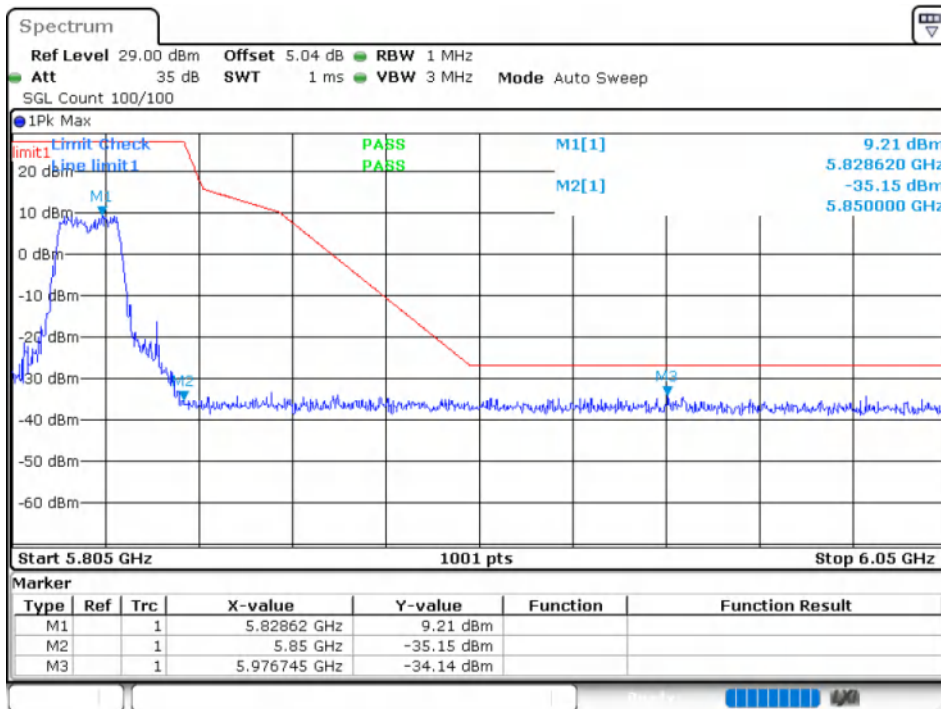


Band Edge NVNT a 5745MHz Low Ant2

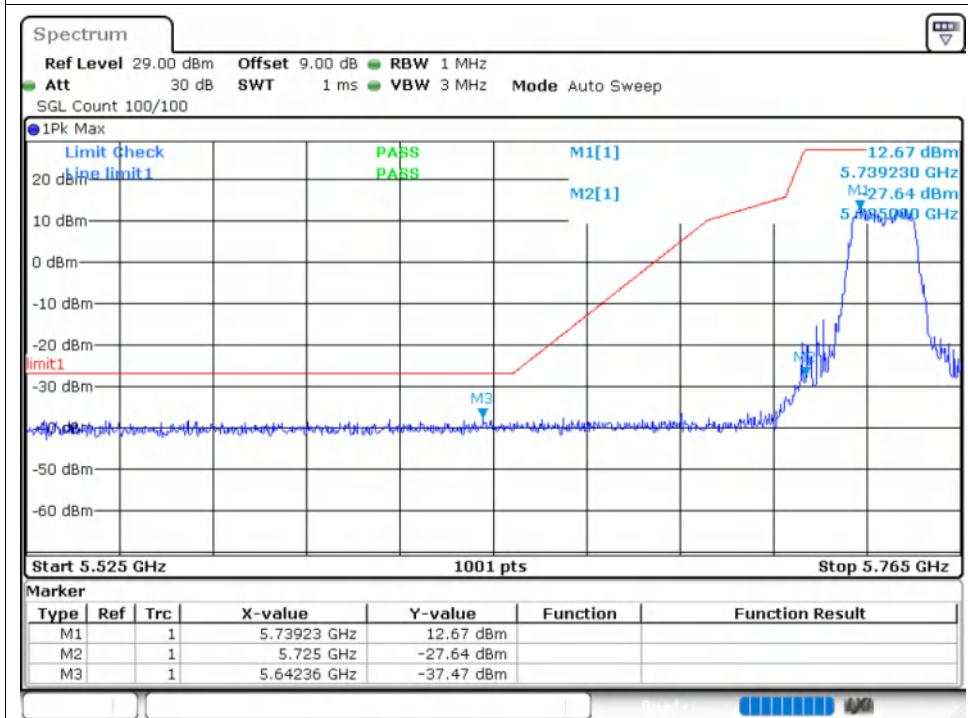


Band Edge NVNT a 5825MHz High Ant2

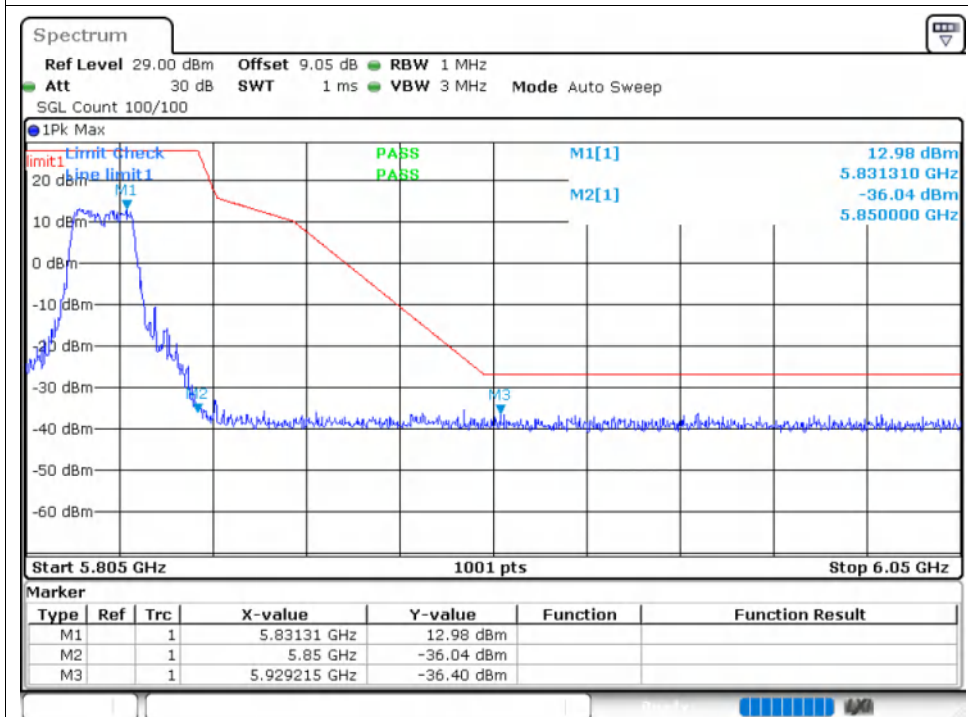


Band Edge NVNT n20 5745MHz Low Ant1

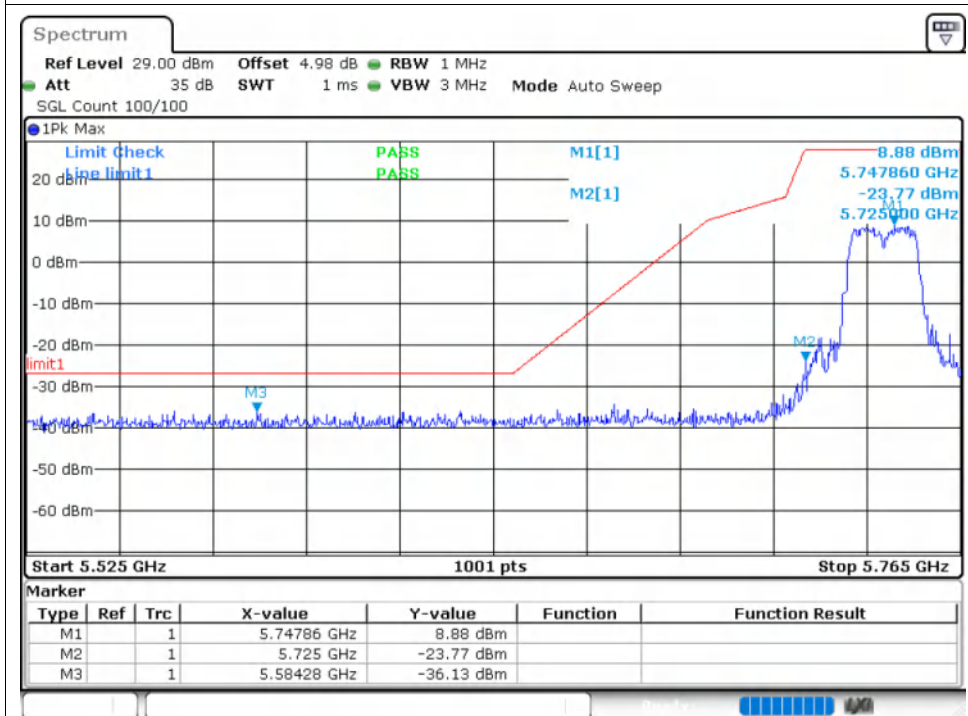


Band Edge NVNT n20 5825MHz High Ant1

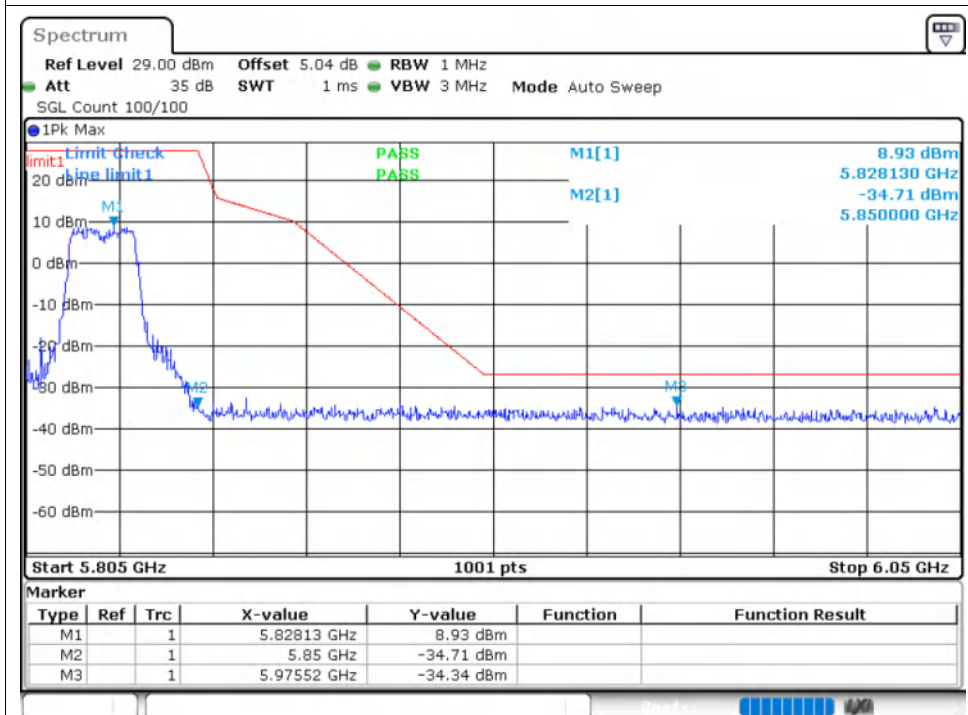


Band Edge NVNT n20 5745MHz Low Ant2

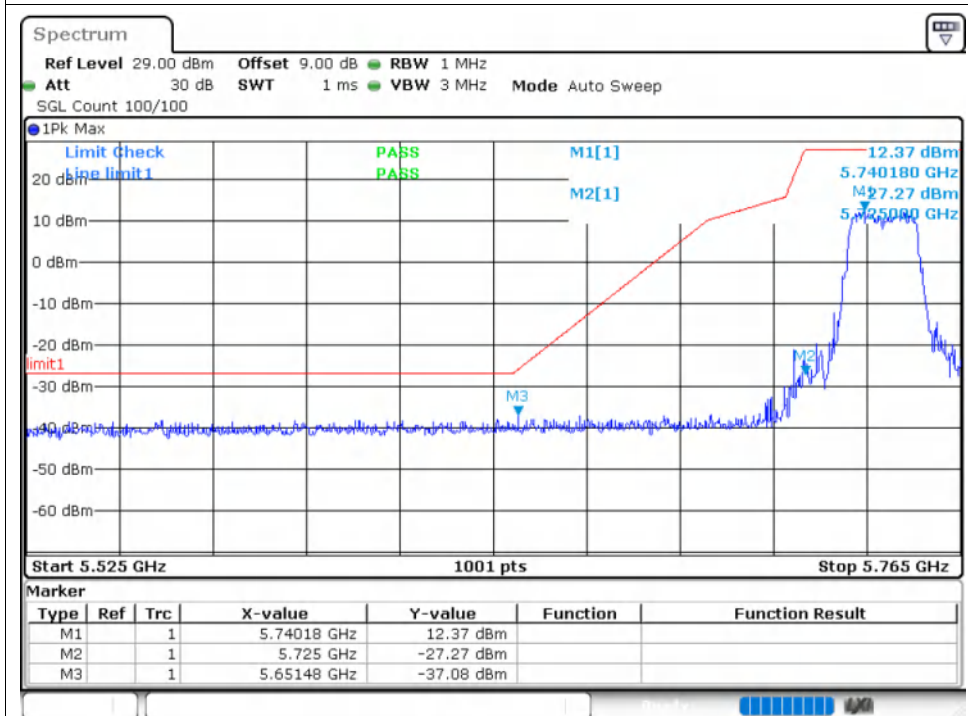


Band Edge NVNT n20 5825MHz High Ant2

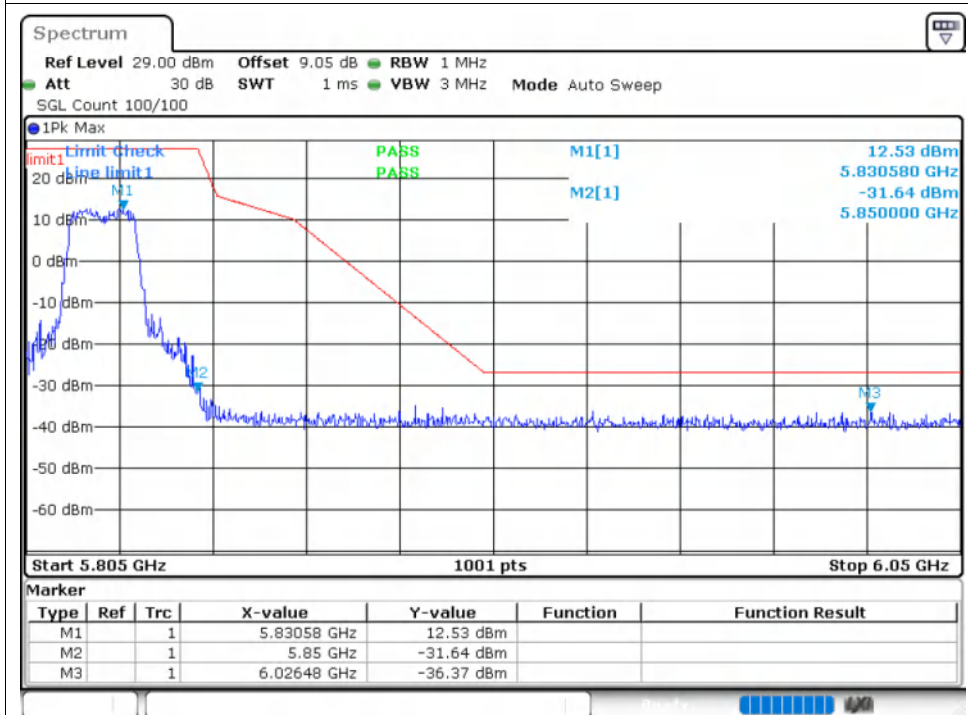


Band Edge NVNT n40 5755MHz Low Ant1

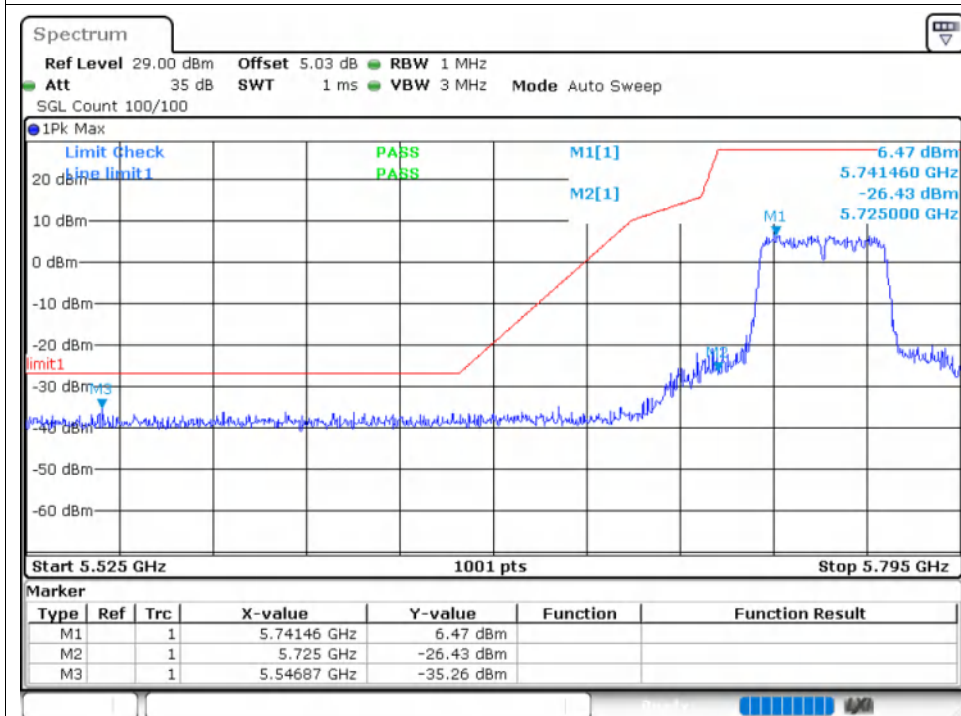

Band Edge NVNT n40 5795MHz High Ant1

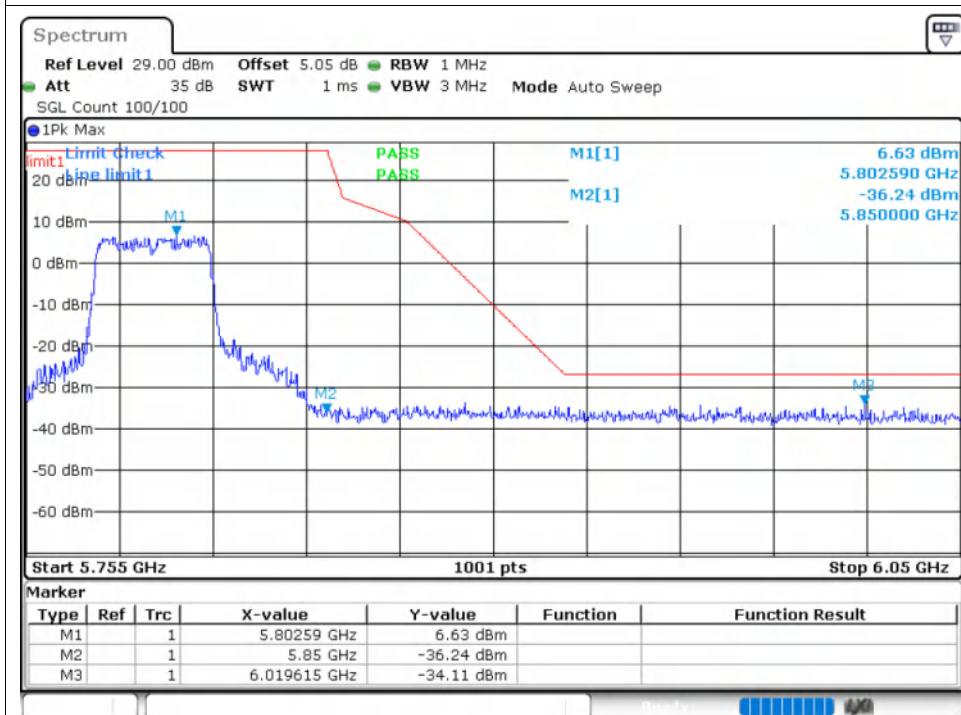

Band Edge NVNT n40 5755MHz Low Ant2

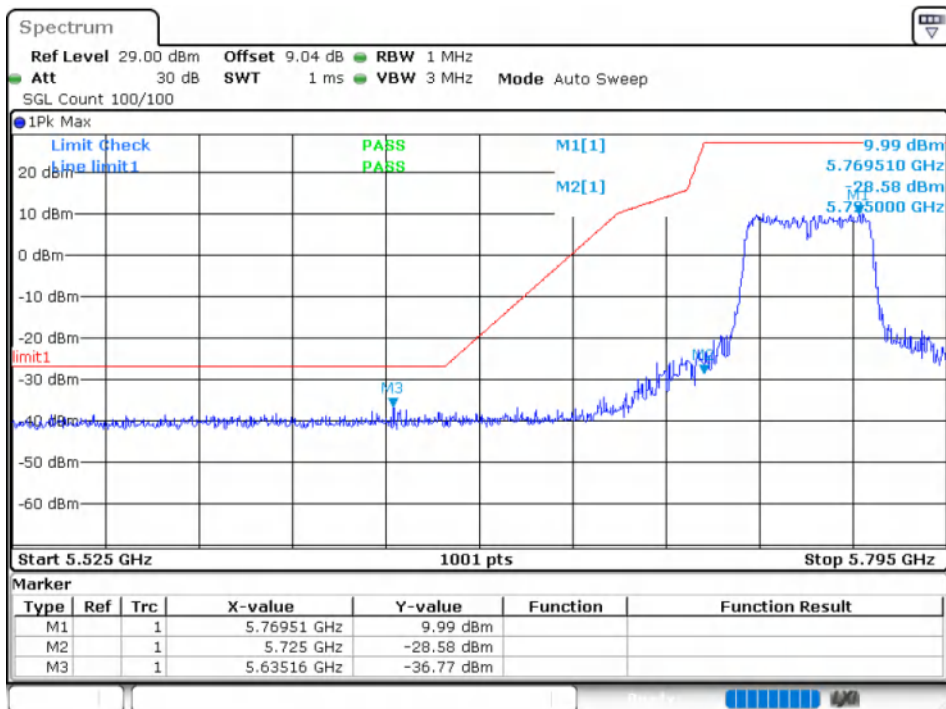

Band Edge NVNT n40 5795MHz High Ant2

