


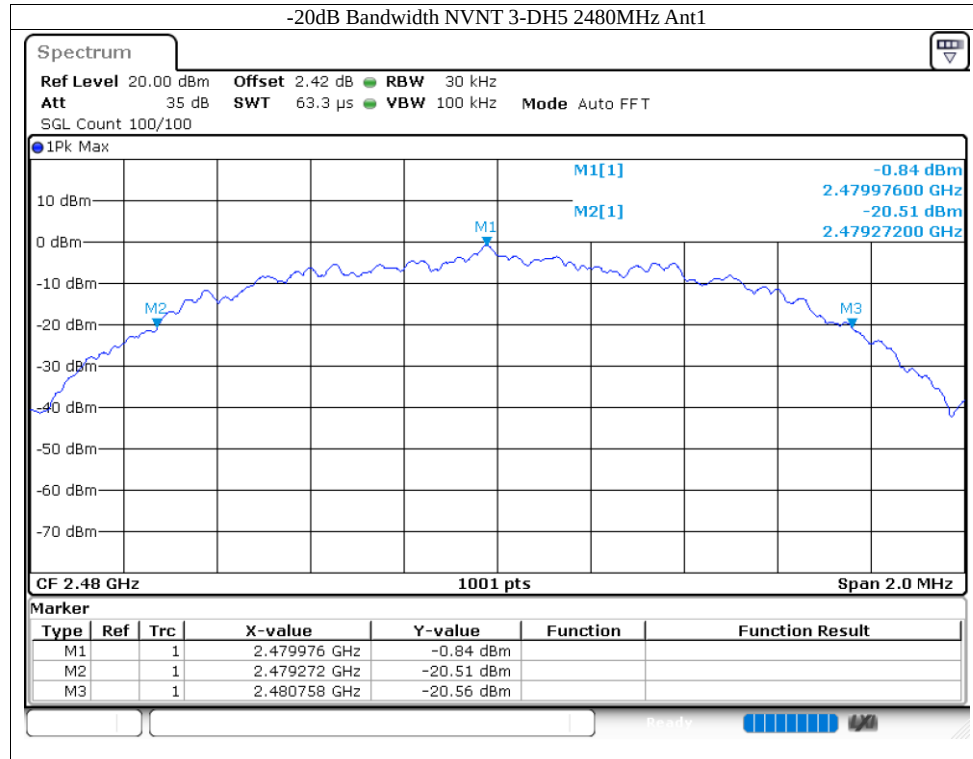



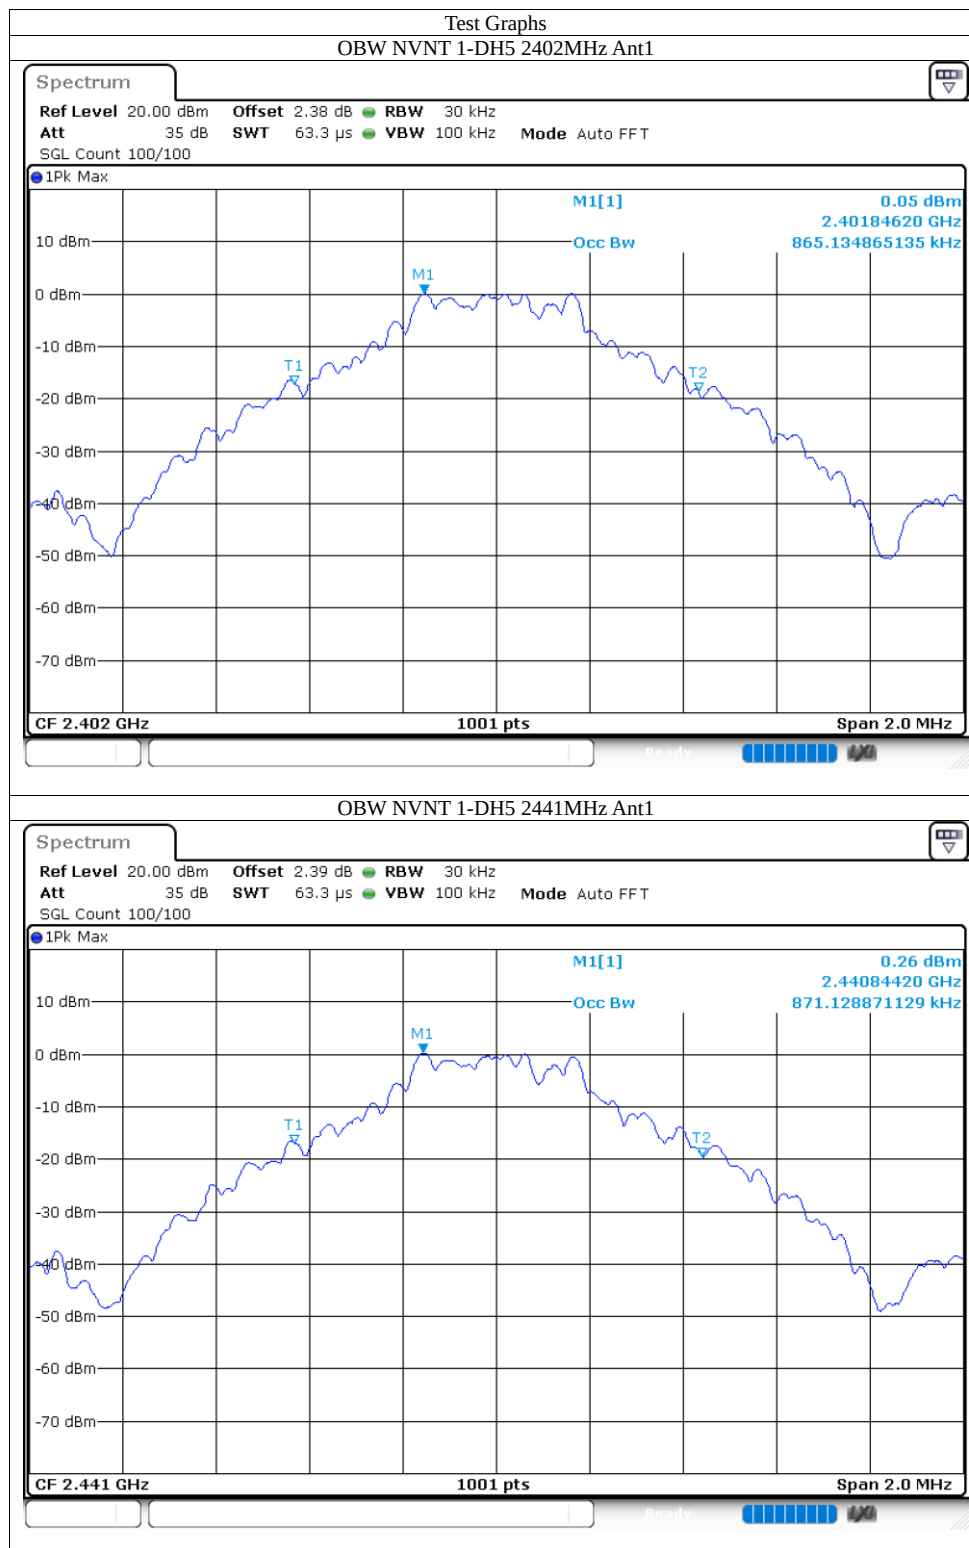




## 8.4 OCCUPIED CHANNEL BANDWIDTH


| Condition | Mode  | Frequency (MHz) | Antenna | 99% OBW (MHz) |
|-----------|-------|-----------------|---------|---------------|
| NVNT      | 1-DH5 | 2402            | Ant1    | 0.865         |
| NVNT      | 1-DH5 | 2441            | Ant1    | 0.871         |
| NVNT      | 1-DH5 | 2480            | Ant1    | 0.899         |
| NVNT      | 2-DH5 | 2402            | Ant1    | 1.371         |
| NVNT      | 2-DH5 | 2441            | Ant1    | 1.365         |
| NVNT      | 2-DH5 | 2480            | Ant1    | 1.365         |
| NVNT      | 3-DH5 | 2402            | Ant1    | 1.363         |
| NVNT      | 3-DH5 | 2441            | Ant1    | 1.357         |
| NVNT      | 3-DH5 | 2480            | Ant1    | 1.363         |

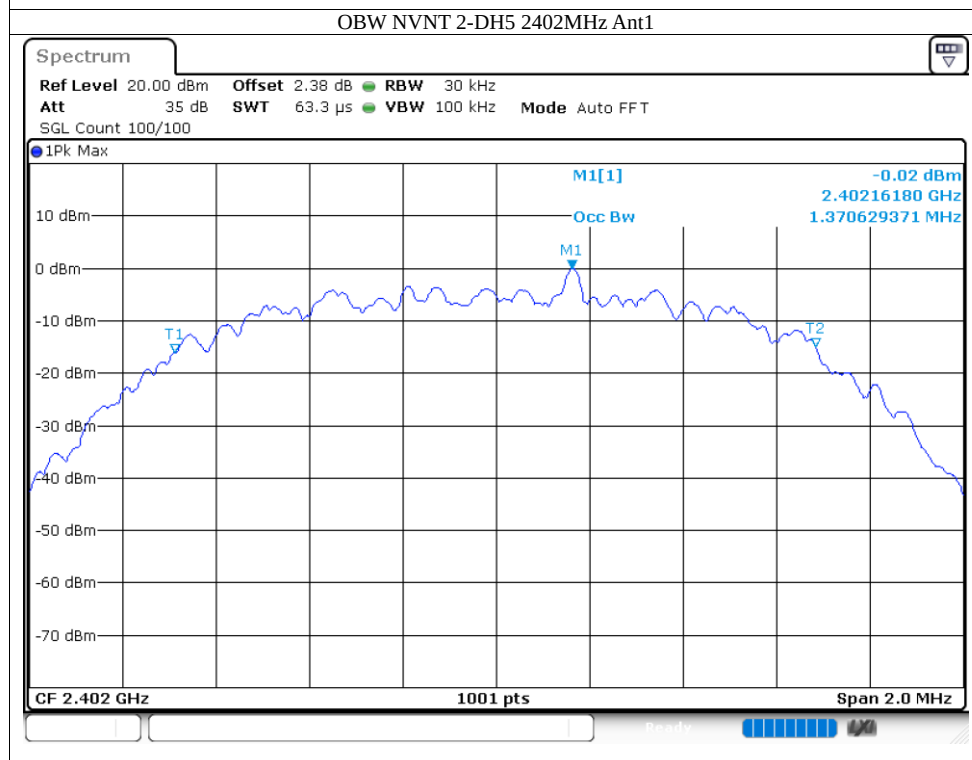

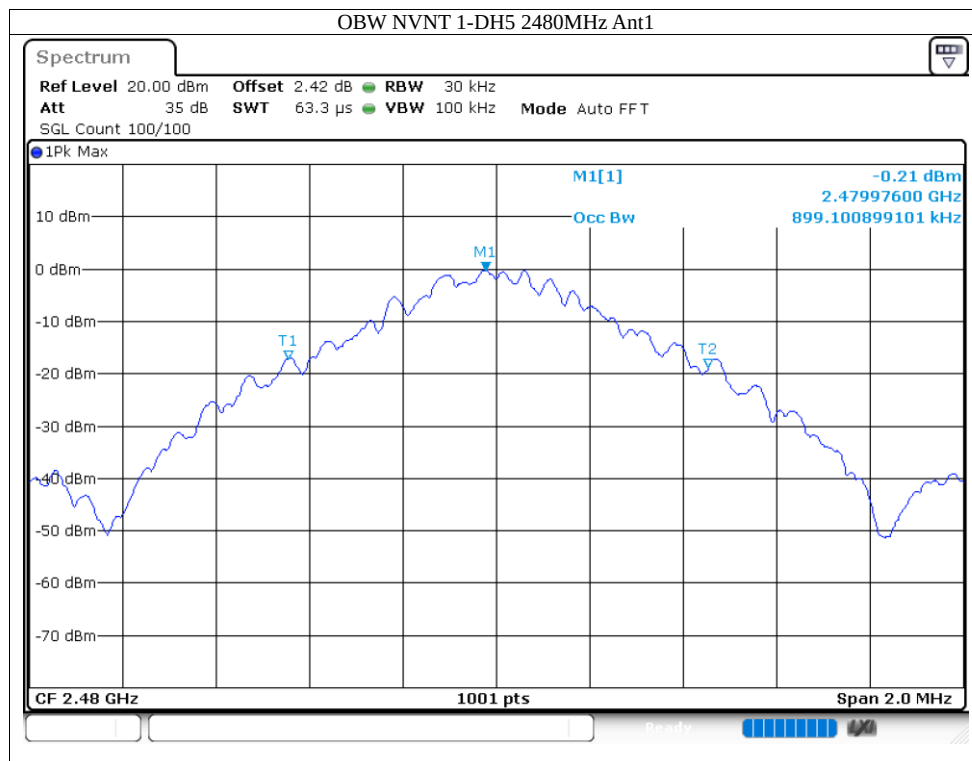

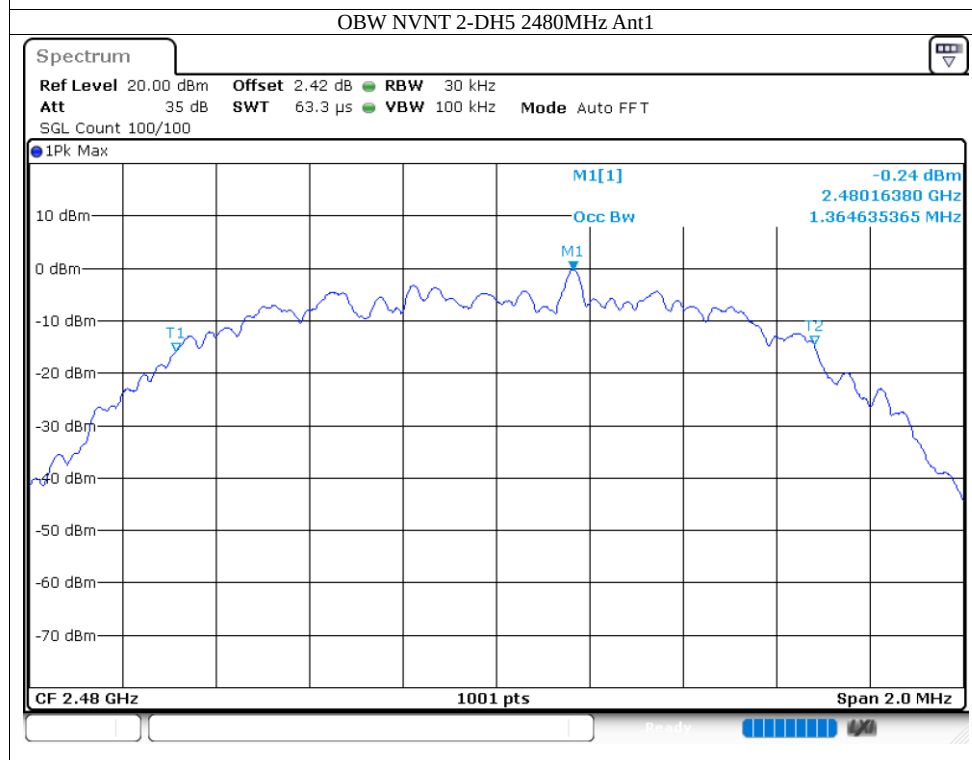
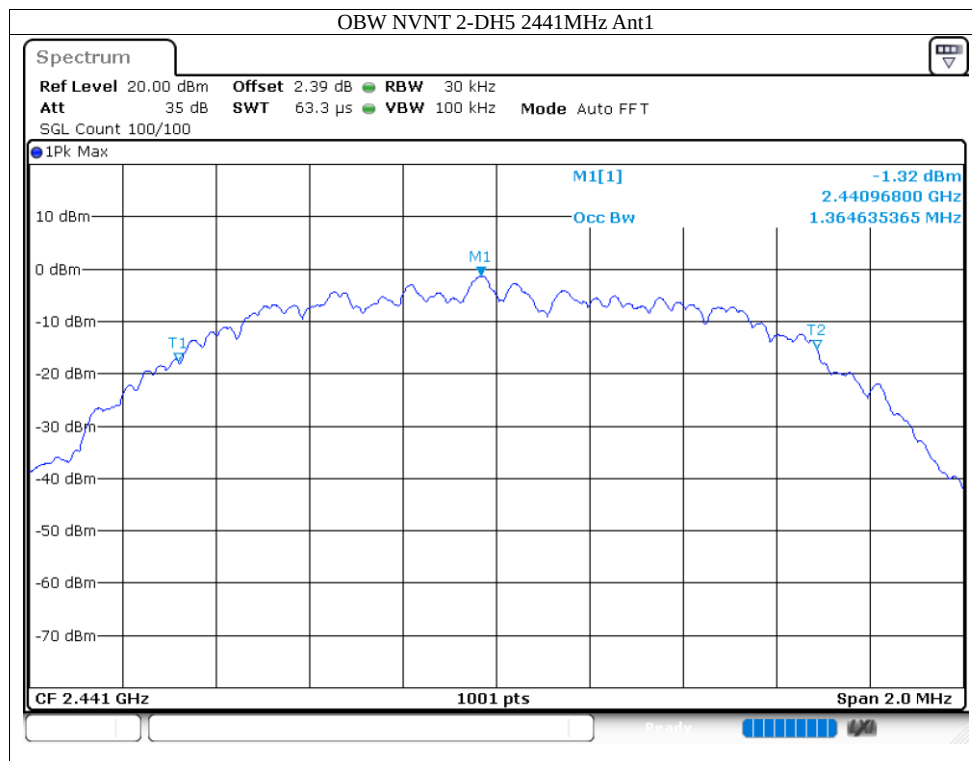


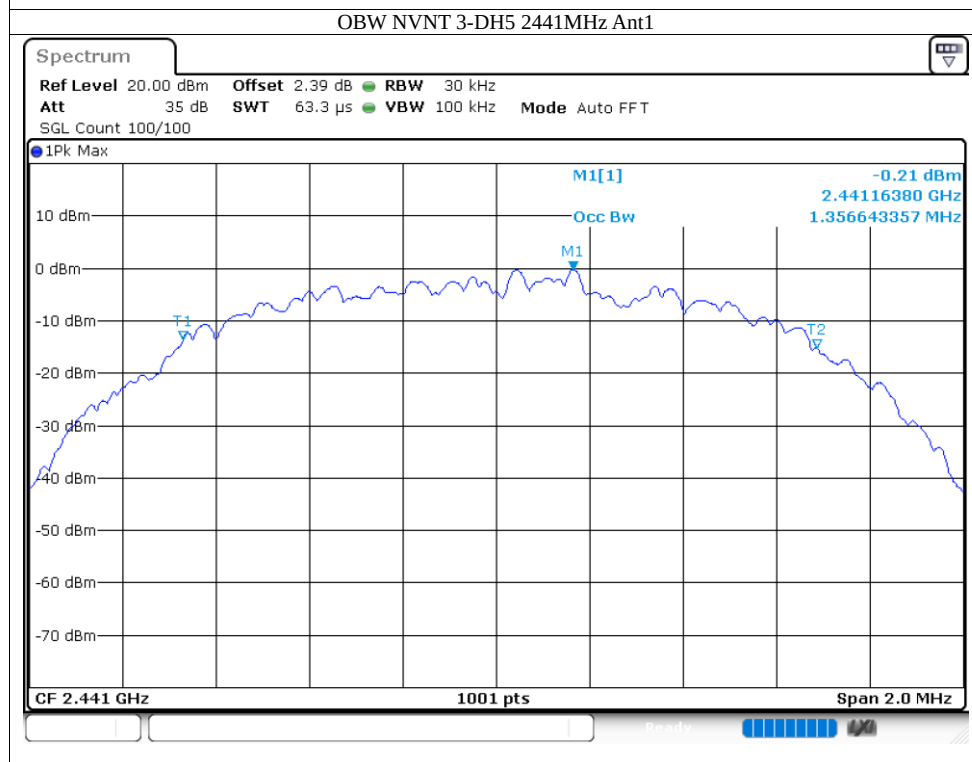
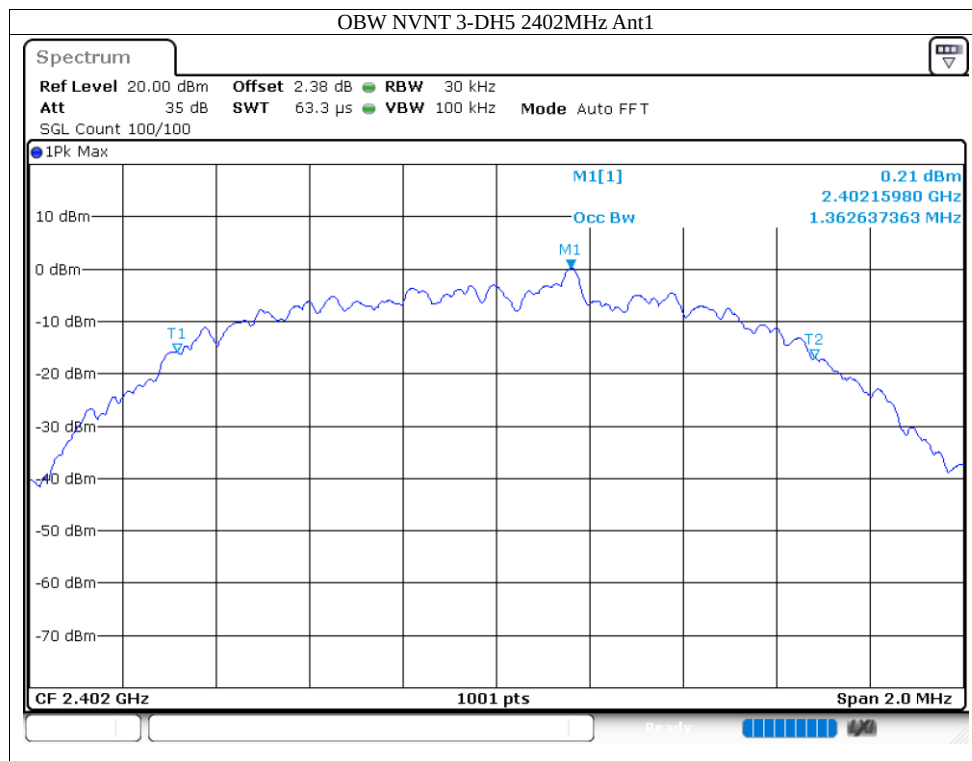



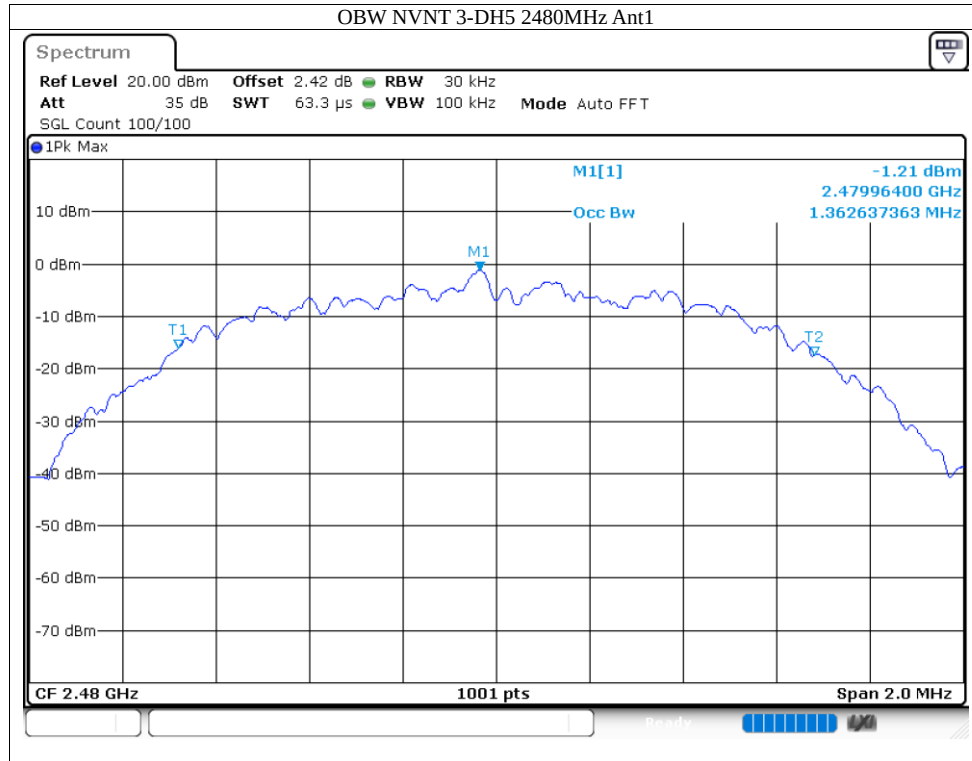




### 8.5 CARRIER FREQUENCIES SEPARATION


| Condition | Mode  | Antenna | Hopping Freq1 (MHz) | Hopping Freq2 (MHz) | HFS (MHz) | Limit (MHz) | Verdict |
|-----------|-------|---------|---------------------|---------------------|-----------|-------------|---------|
| NVNT      | 1-DH5 | Ant1    | 2402.058            | 2403.06             | 1.002     | 0.635       | Pass    |
| NVNT      | 1-DH5 | Ant1    | 2441.06             | 2442.164            | 1.104     | 0.631       | Pass    |
| NVNT      | 1-DH5 | Ant1    | 2479.058            | 2480.164            | 1.106     | 0.636       | Pass    |
| NVNT      | 2-DH5 | Ant1    | 2401.988            | 2403.162            | 1.174     | 1.008       | Pass    |
| NVNT      | 2-DH5 | Ant1    | 2440.978            | 2441.99             | 1.012     | 1.012       | Pass    |
| NVNT      | 2-DH5 | Ant1    | 2479.164            | 2480.166            | 1.002     | 0.996       | Pass    |
| NVNT      | 3-DH5 | Ant1    | 2402.16             | 2403.162            | 1.002     | 0.992       | Pass    |
| NVNT      | 3-DH5 | Ant1    | 2440.84             | 2441.972            | 1.132     | 0.988       | Pass    |
| NVNT      | 3-DH5 | Ant1    | 2478.838            | 2479.836            | 0.998     | 0.991       | Pass    |

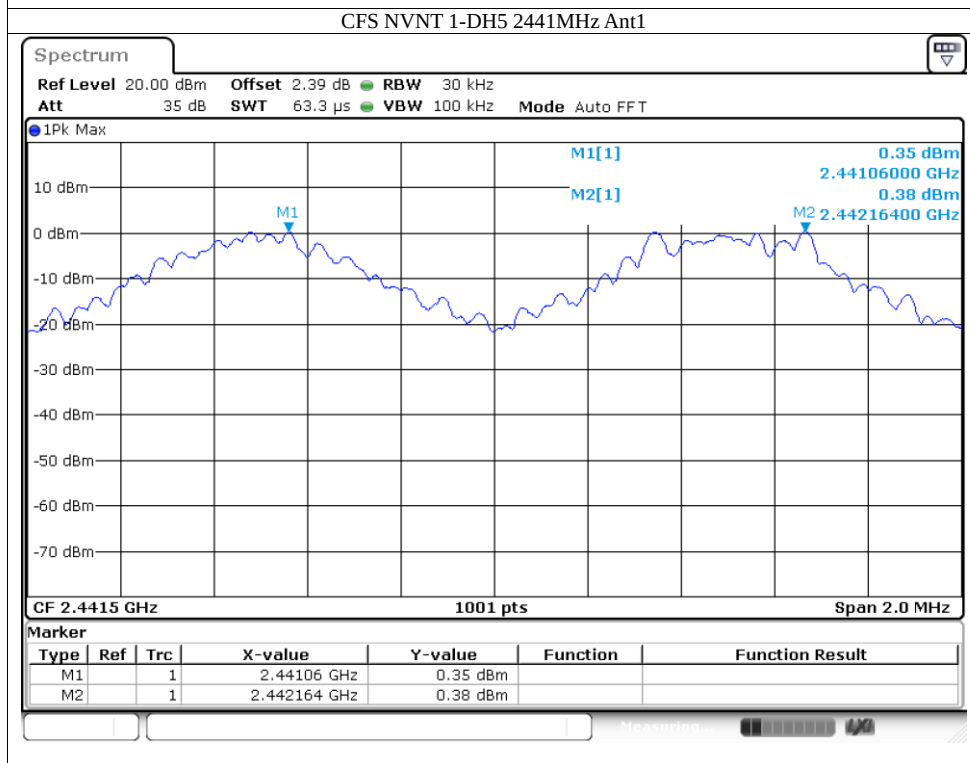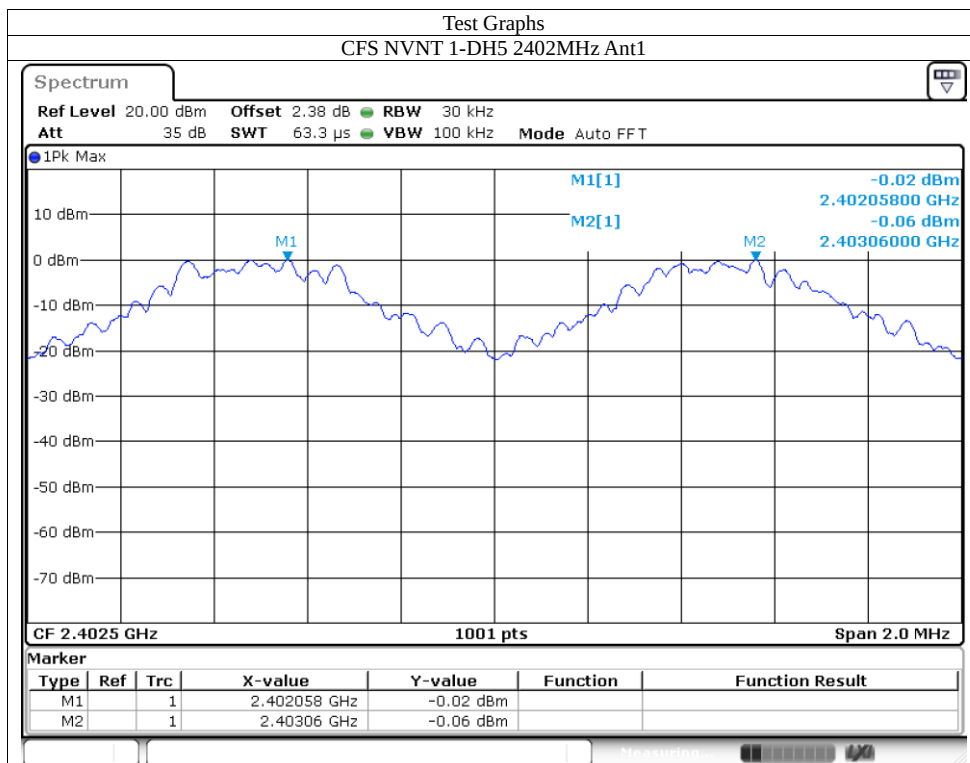

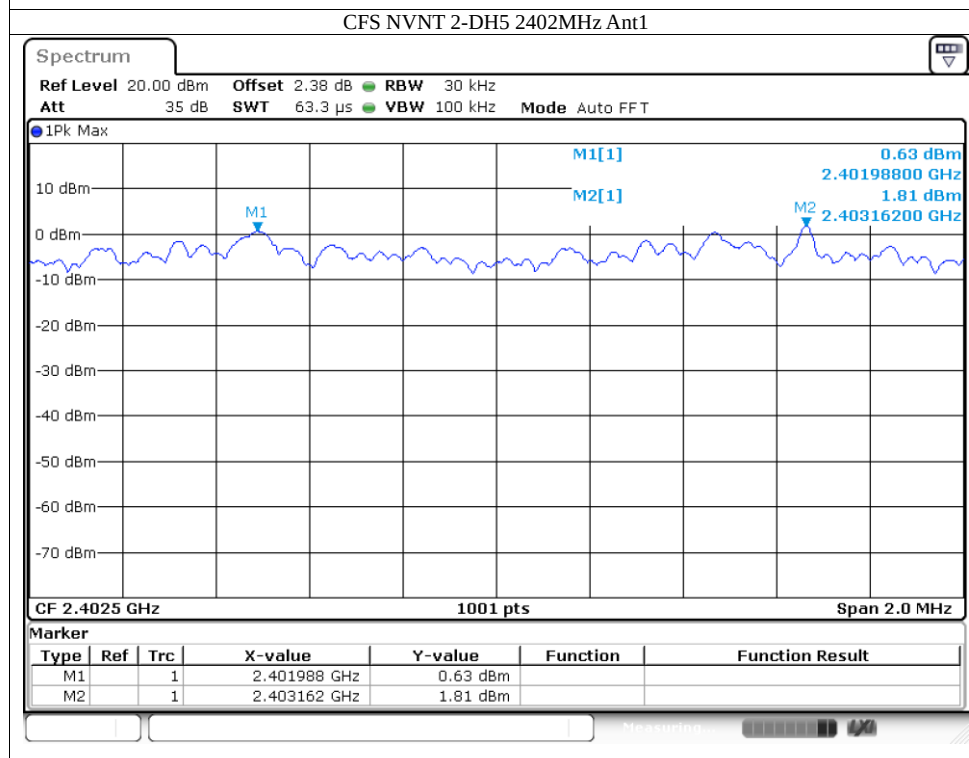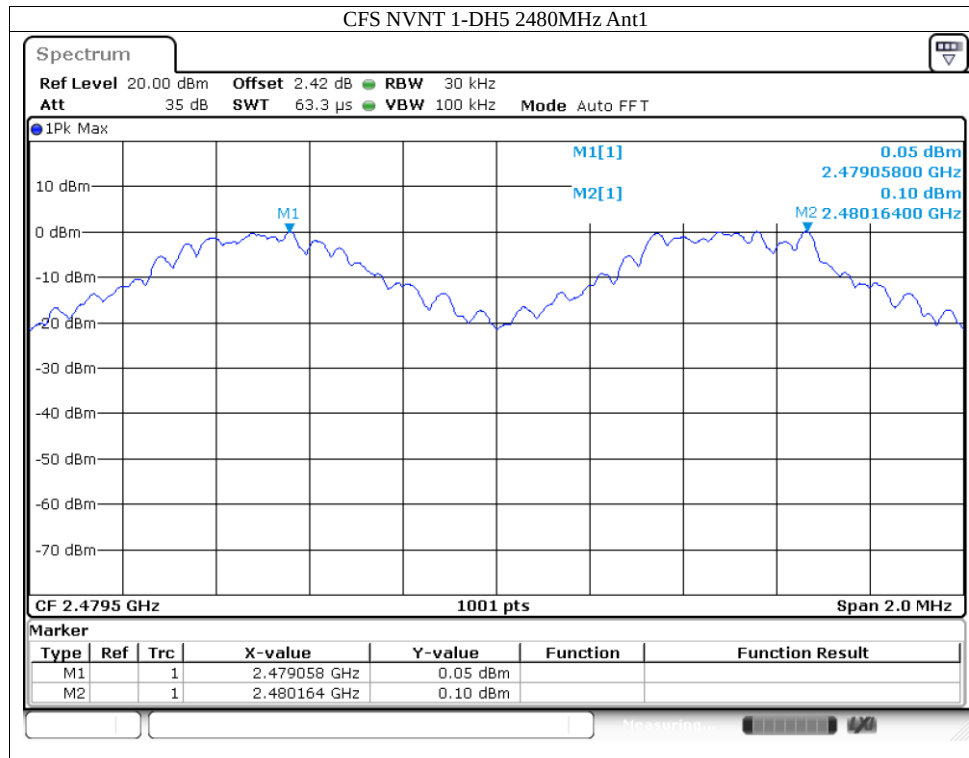

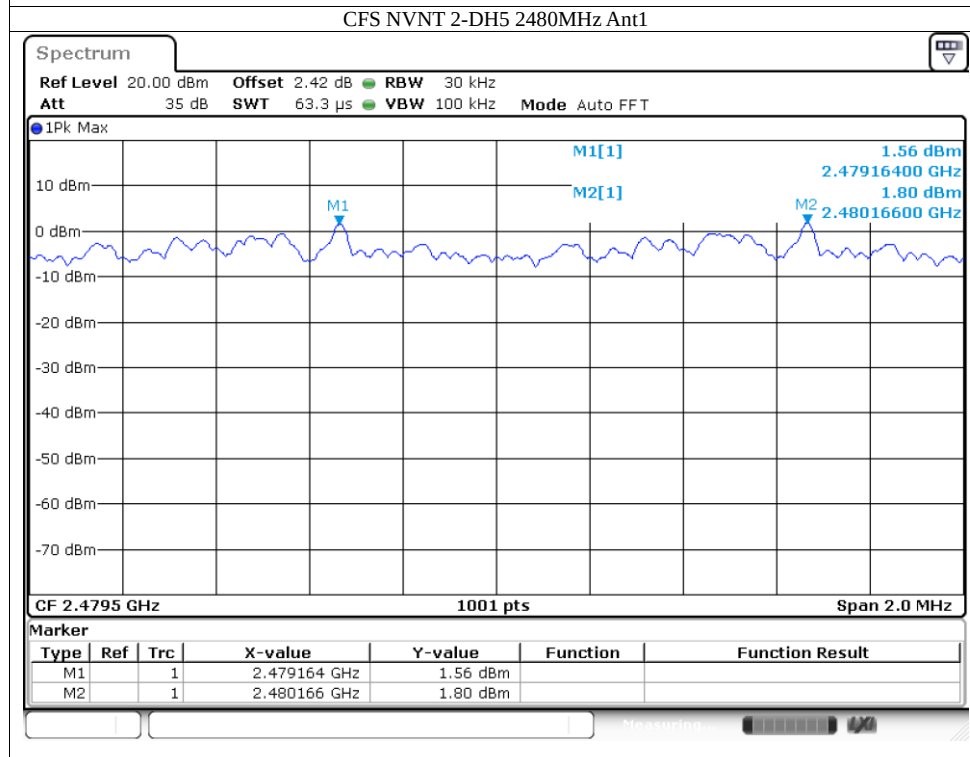
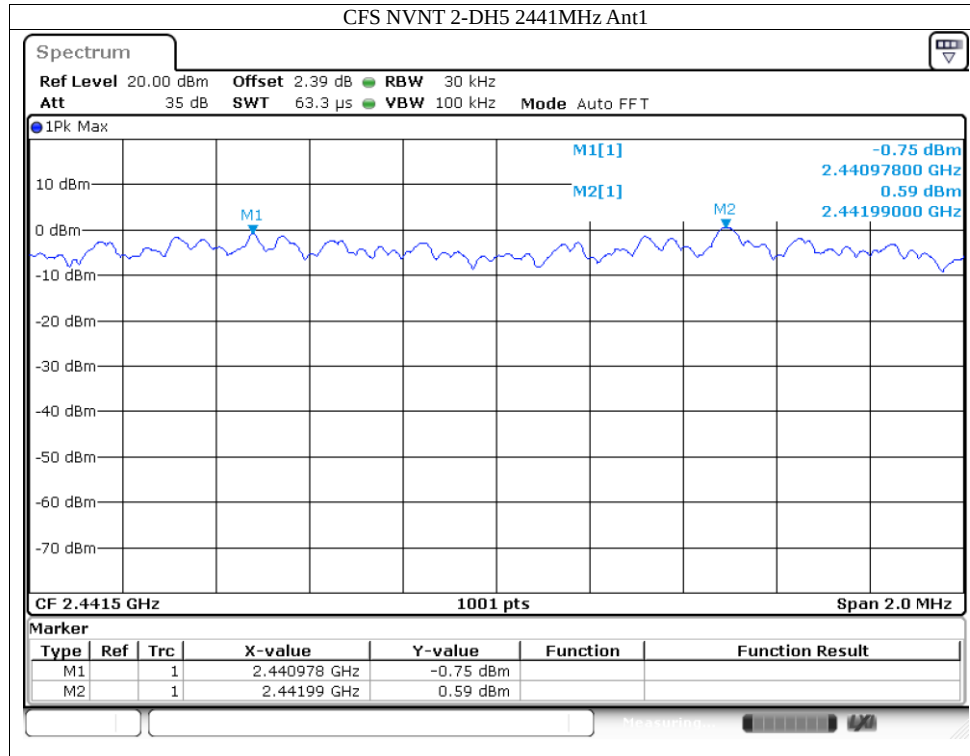


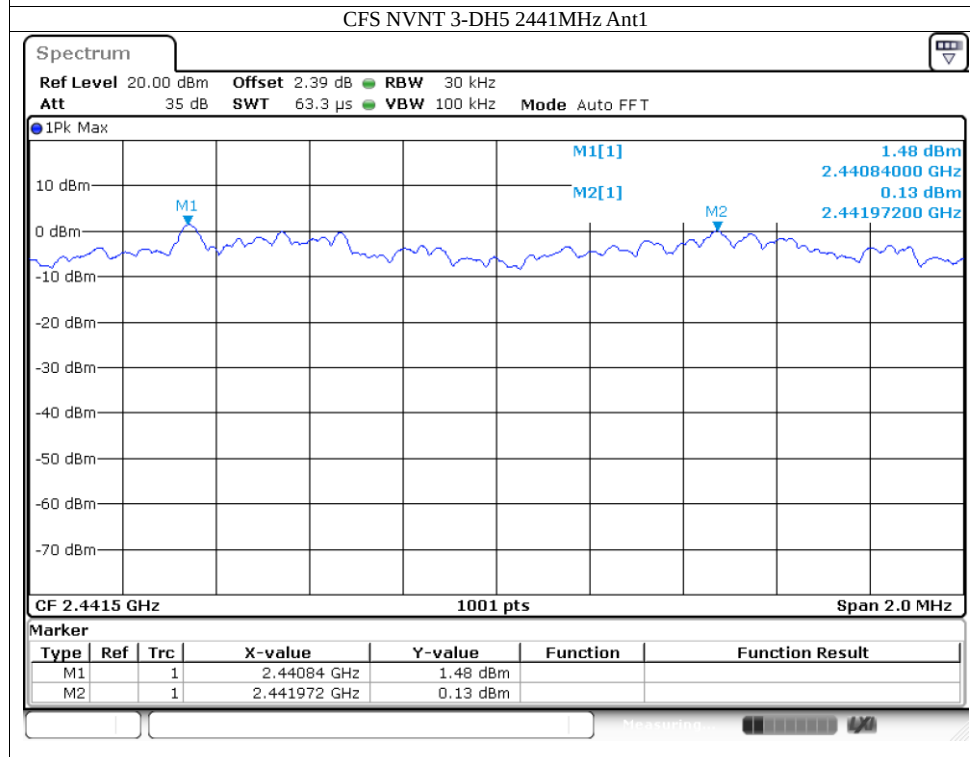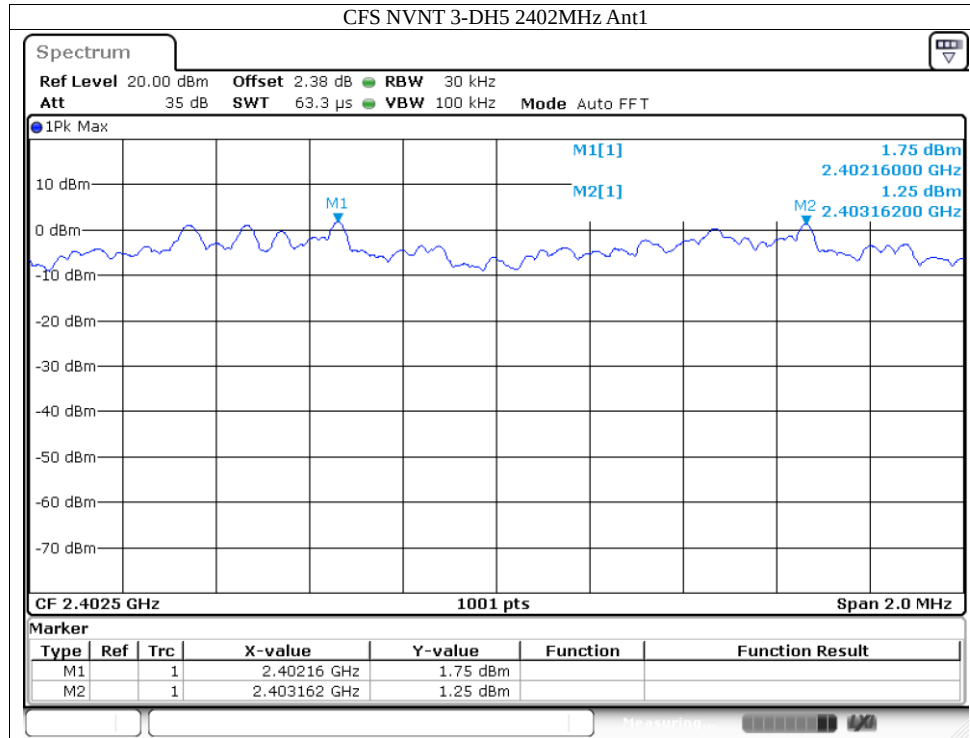


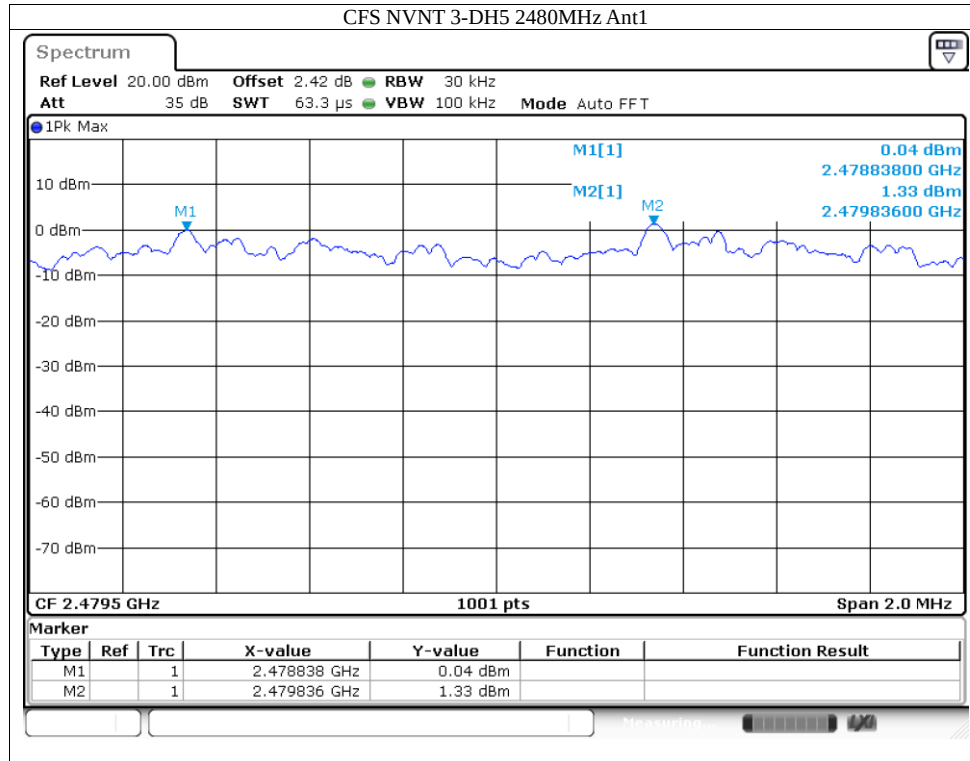

**8.6 NUMBER OF HOPPING CHANNEL**


| Condition | Mode  | Antenna | Hopping Number | Limit | Verdict |
|-----------|-------|---------|----------------|-------|---------|
| NVNT      | 1-DH5 | Ant1    | 79             | 15    | Pass    |
| NVNT      | 2-DH5 | Ant1    | 79             | 15    | Pass    |
| NVNT      | 3-DH5 | Ant1    | 79             | 15    | Pass    |

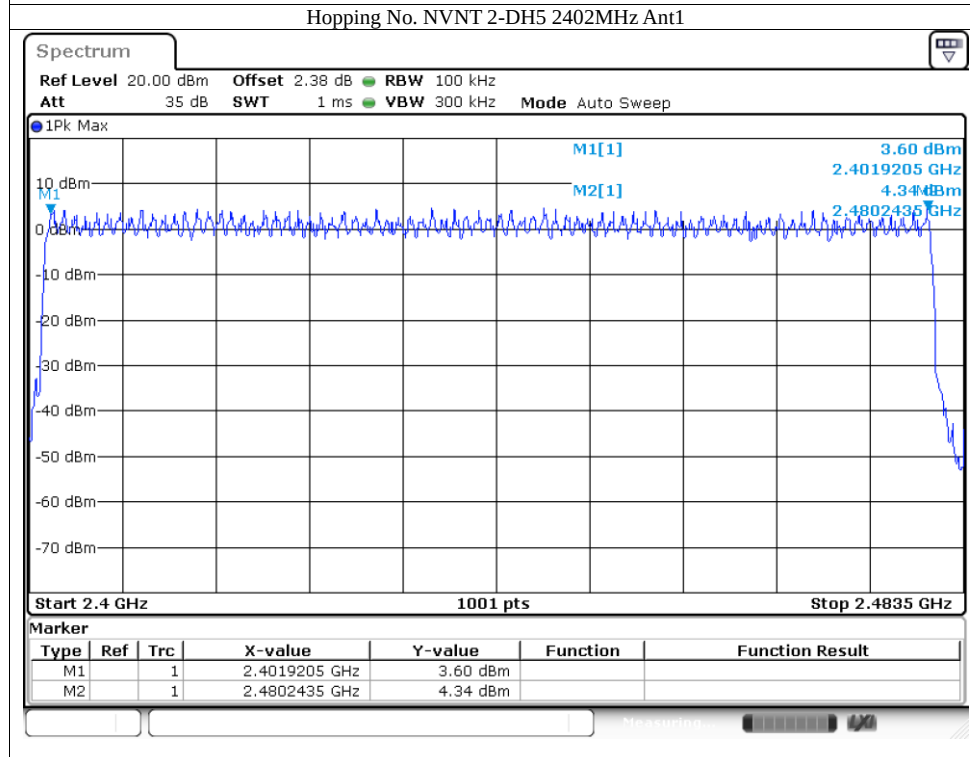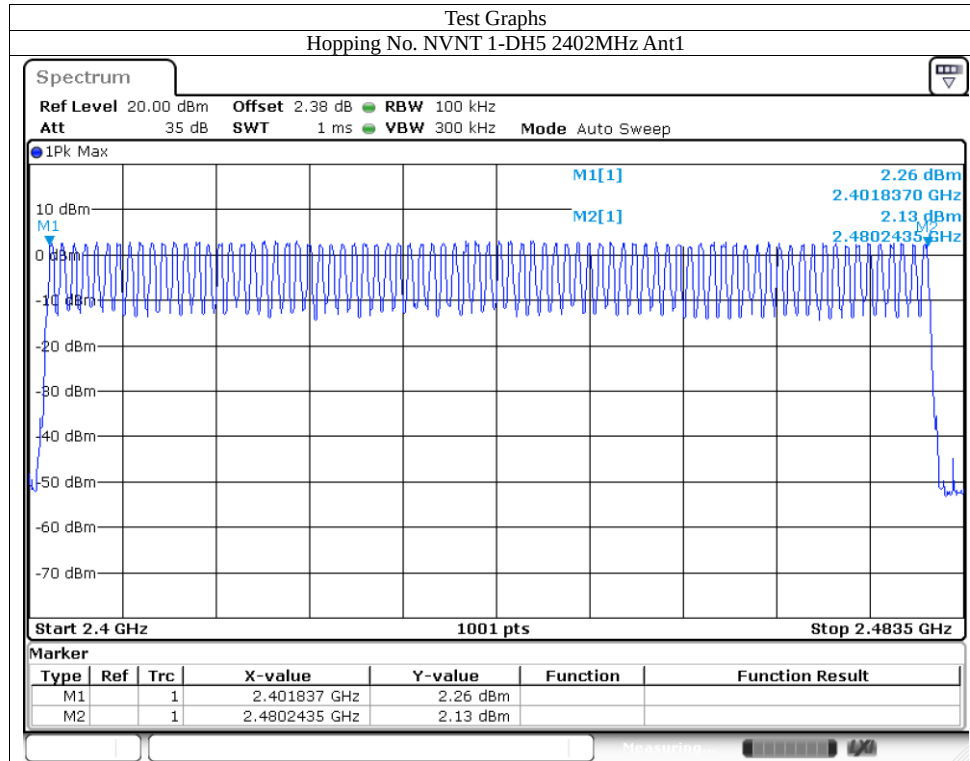



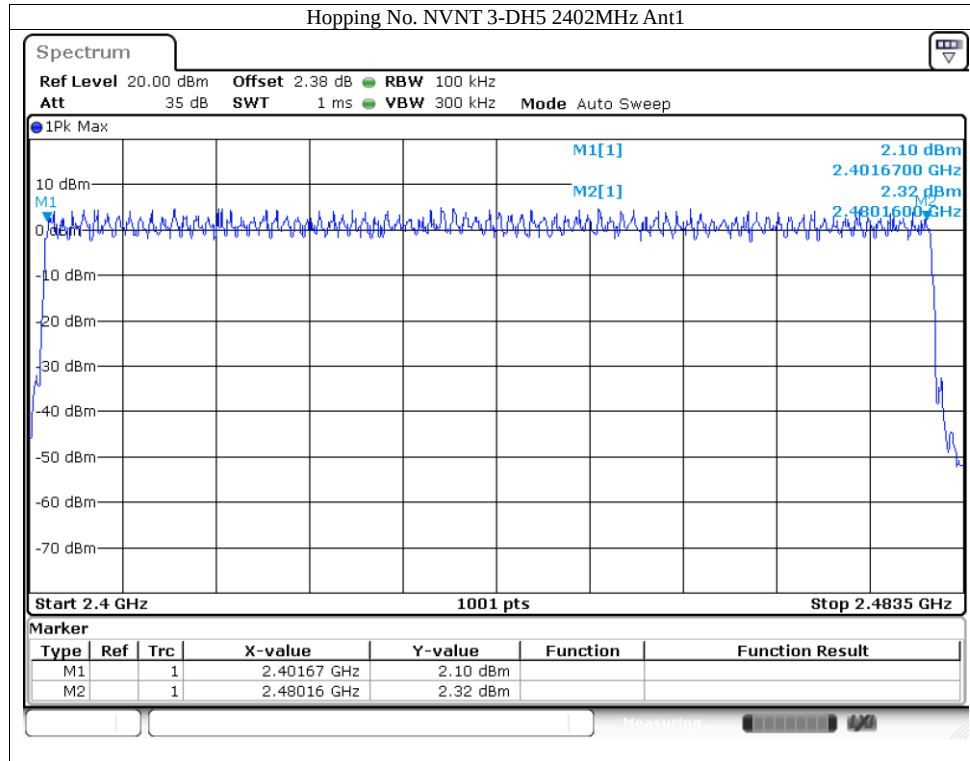




## 8.7 BAND EDGE



| Condition | Mode  | Frequency (MHz) | Antenna | Hopping Mode | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|-------|-----------------|---------|--------------|-----------------|-------------|---------|
| NVNT      | 1-DH5 | 2402            | Ant1    | No-Hopping   | -53.54          | -20         | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | No-Hopping   | -55             | -20         | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | No-Hopping   | -52.98          | -20         | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | No-Hopping   | -43.12          | -20         | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | No-Hopping   | -53.41          | -20         | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | No-Hopping   | -54.87          | -20         | Pass    |


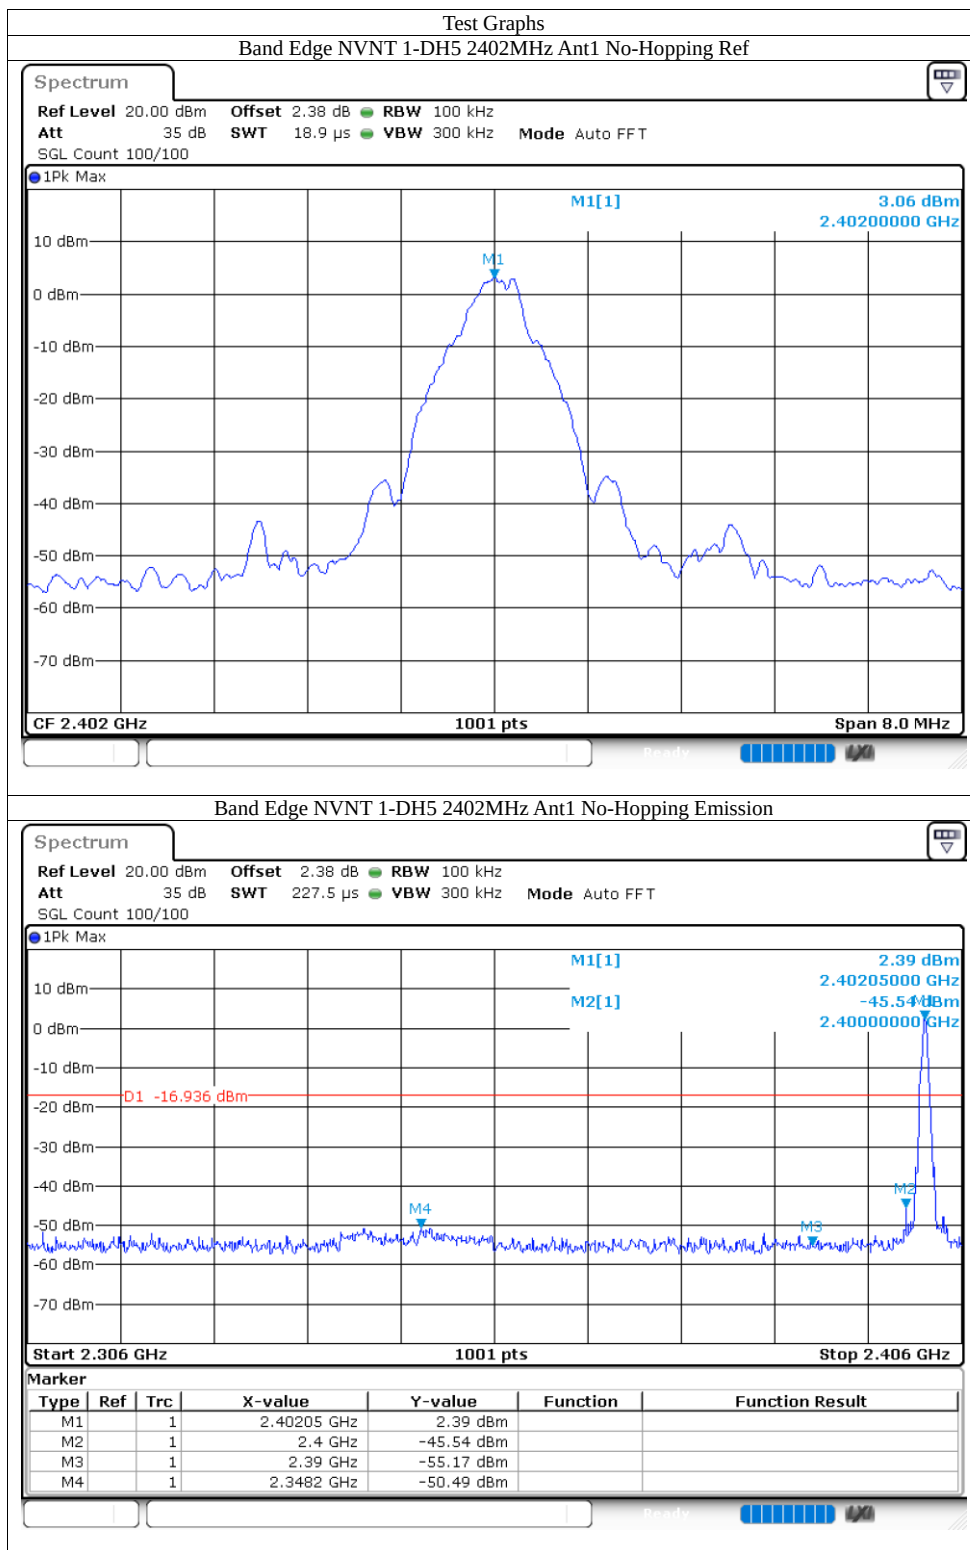


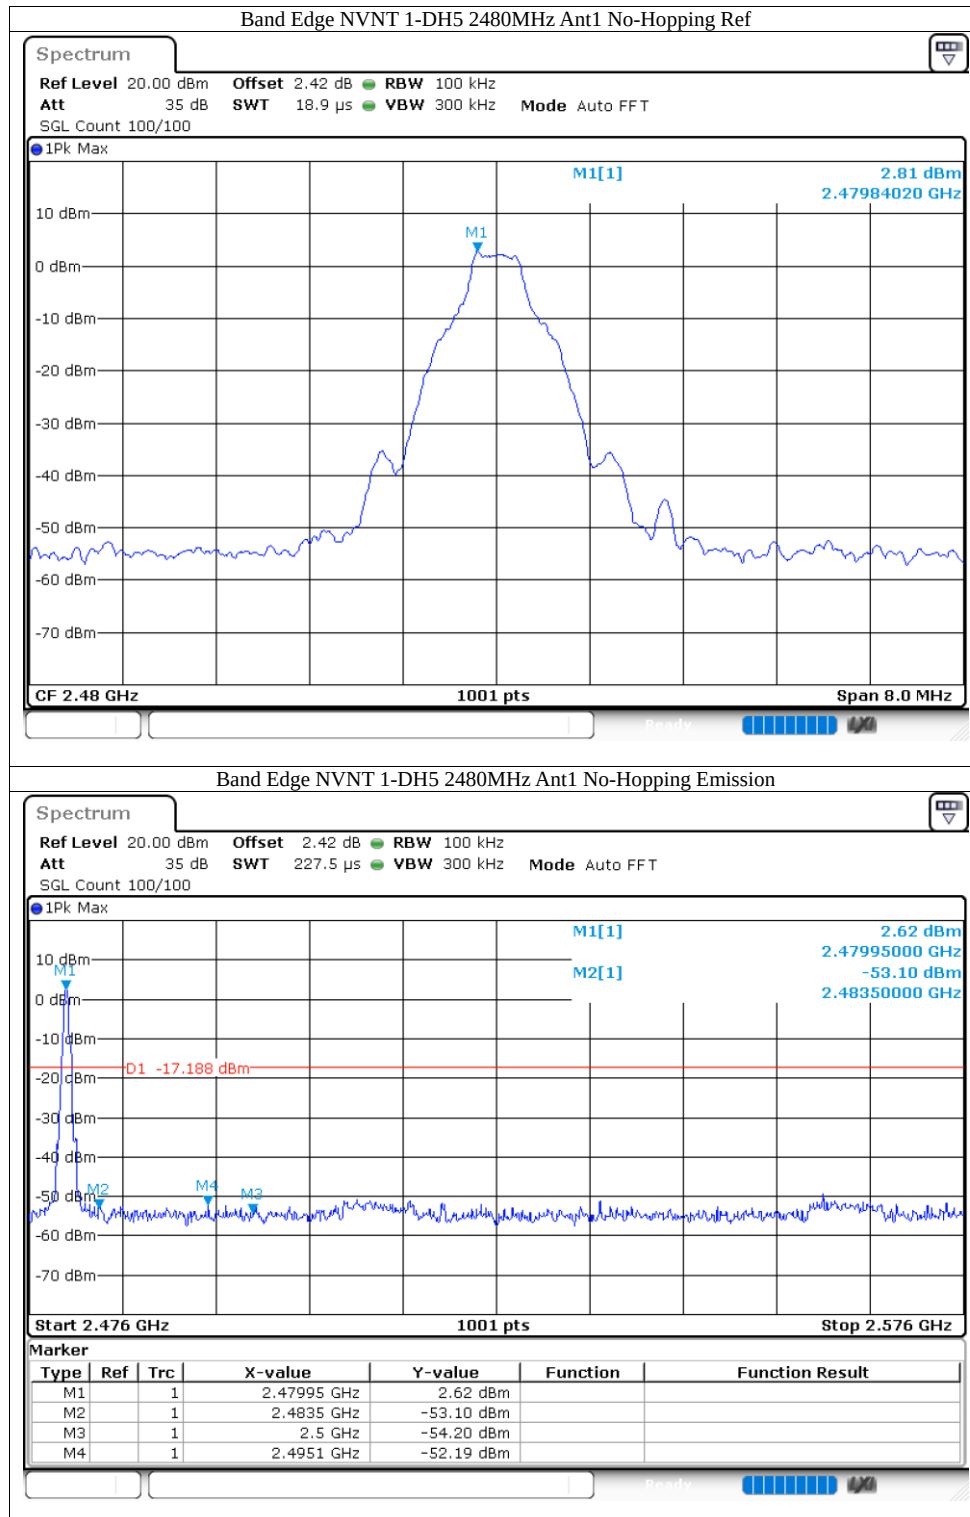

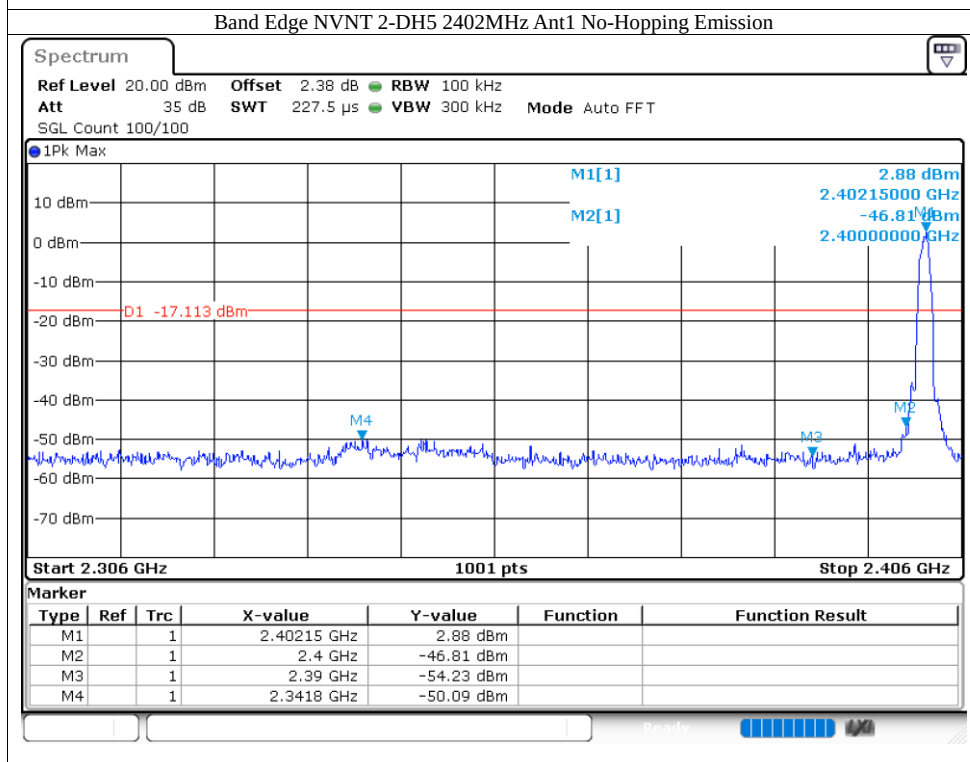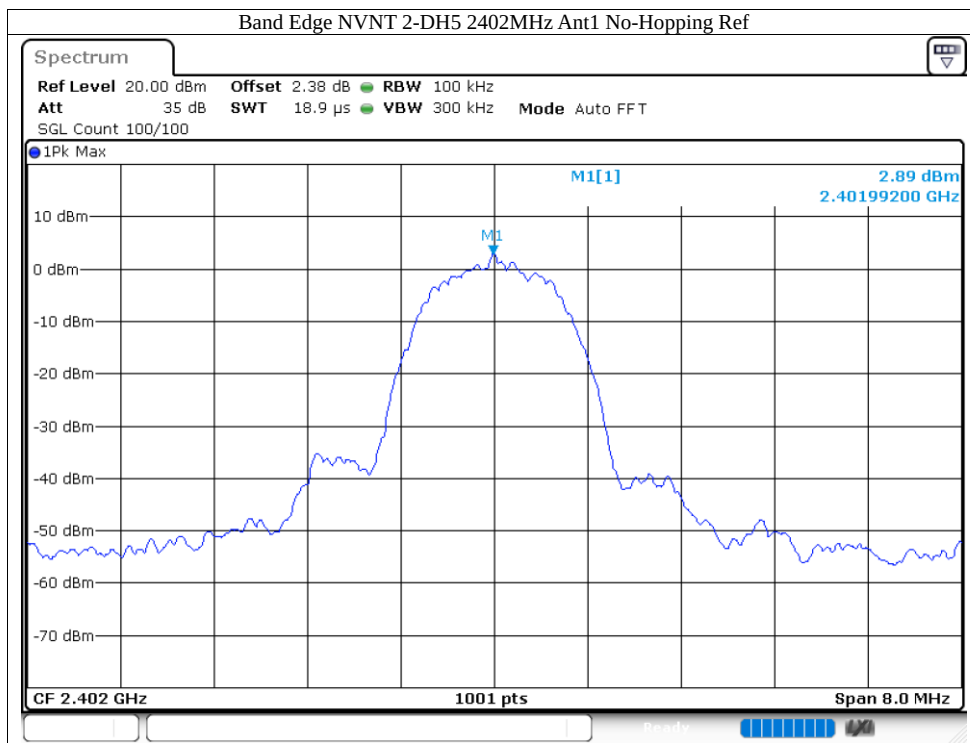

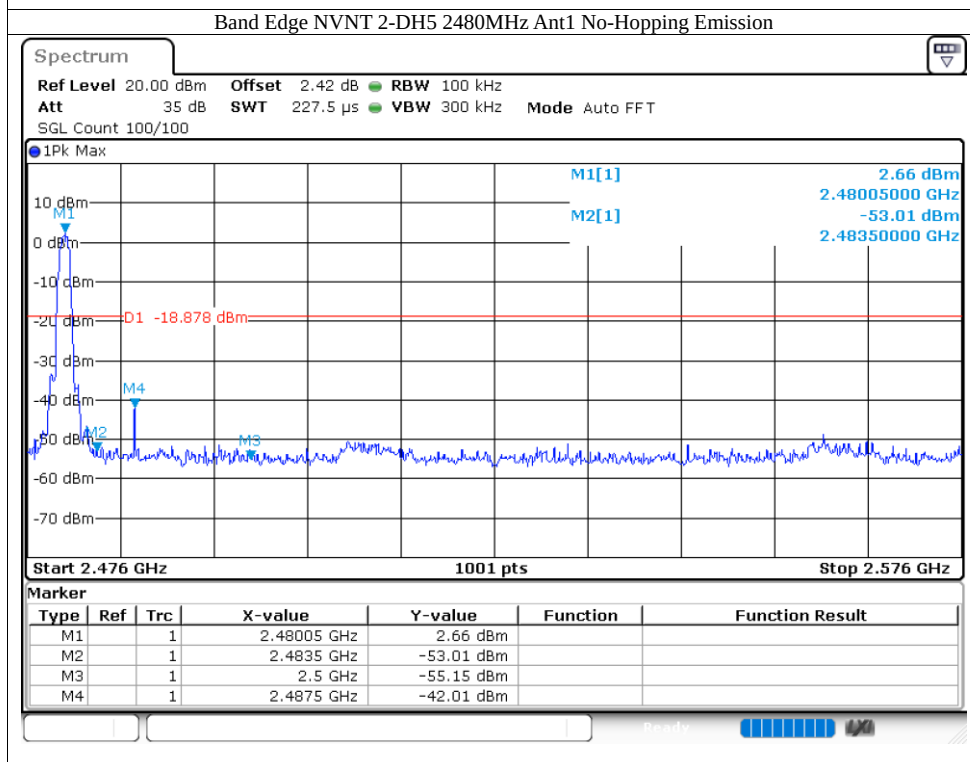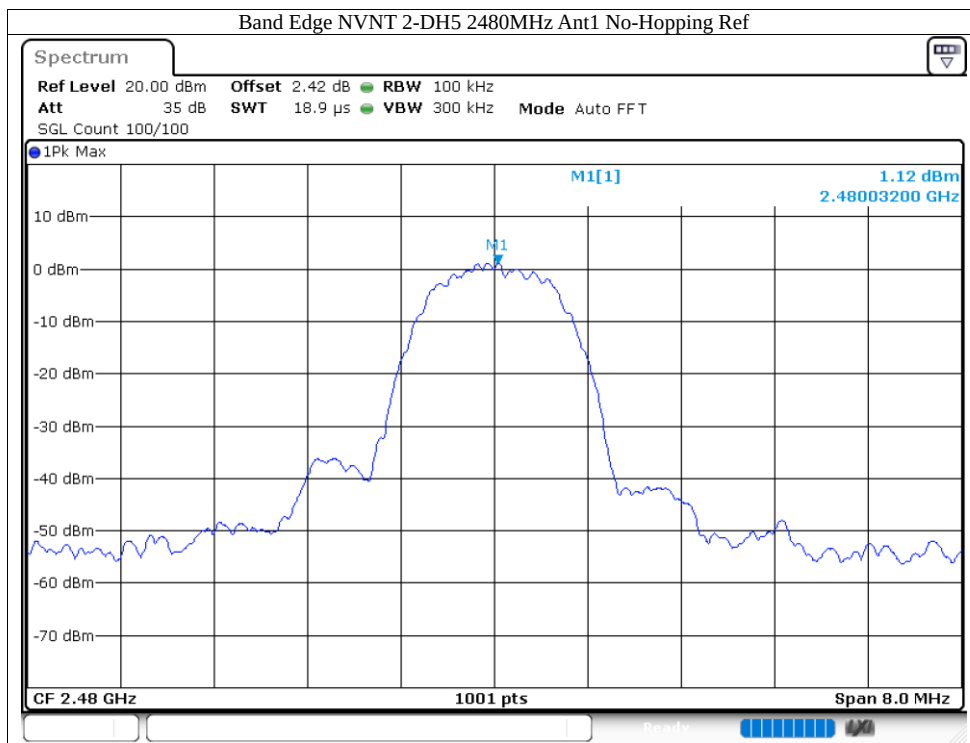


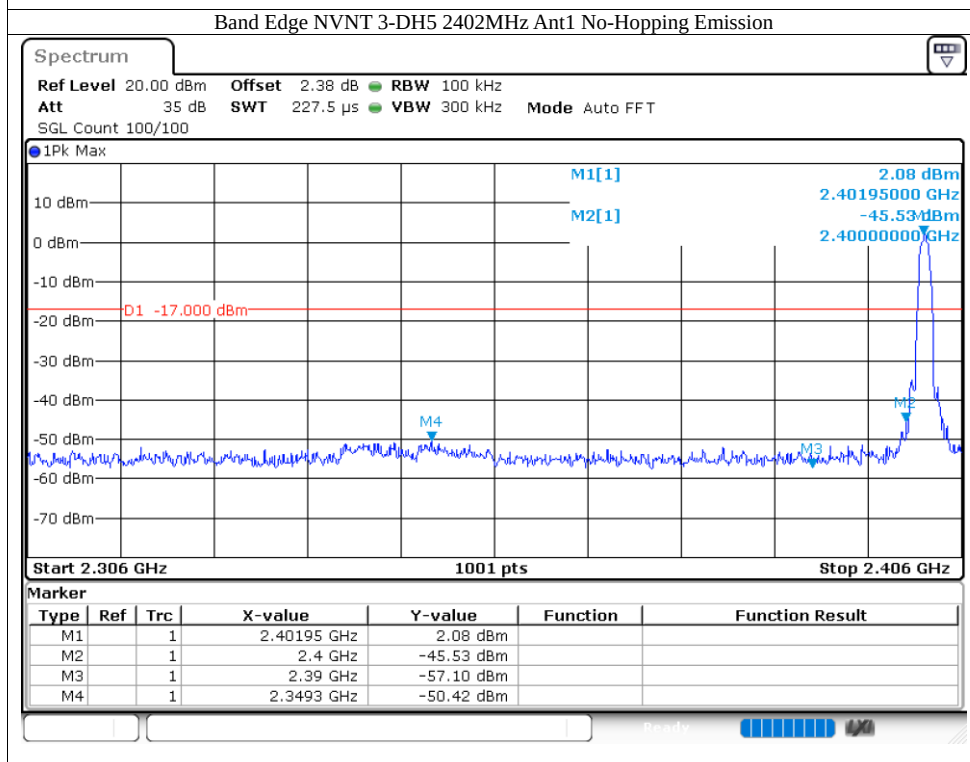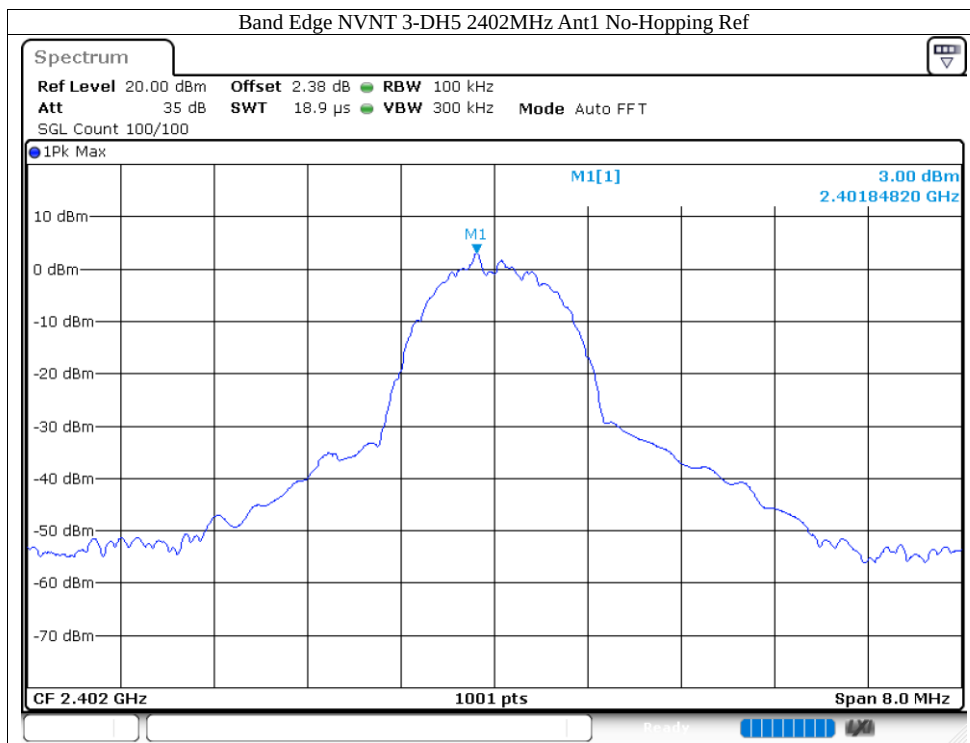


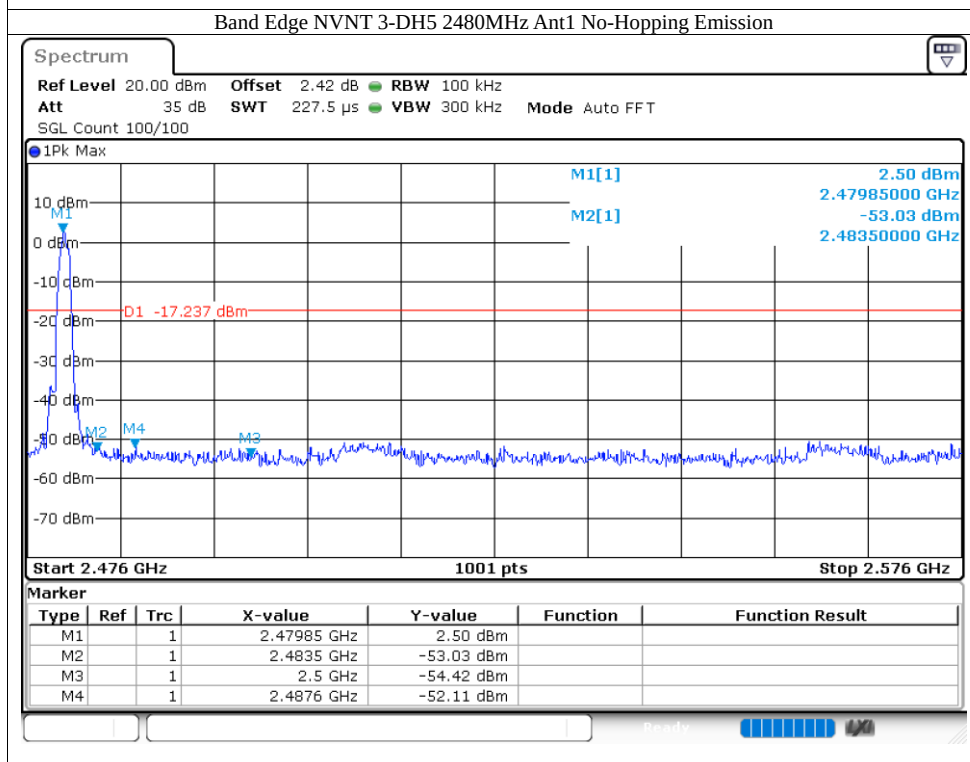
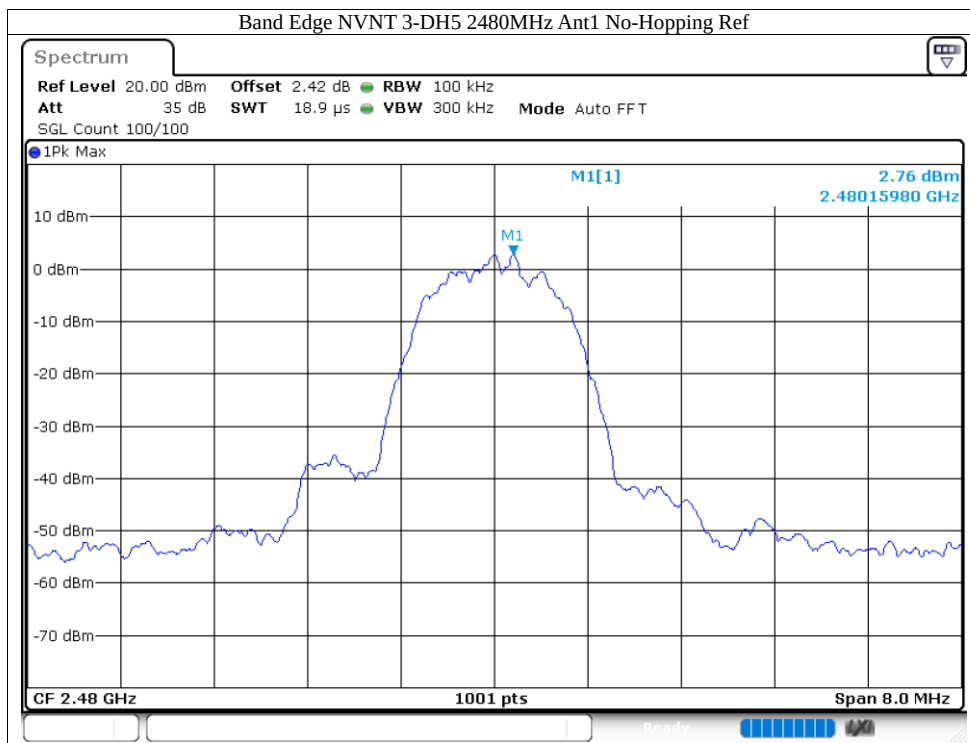




## 8.8 BAND EDGE(HOPPING)



| Condition | Mode  | Frequency (MHz) | Antenna | Hopping Mode | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|-------|-----------------|---------|--------------|-----------------|-------------|---------|
| NVNT      | 1-DH5 | 2402            | Ant1    | Hopping      | -54.56          | -20         | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | Hopping      | -55.27          | -20         | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | Hopping      | -55.43          | -20         | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | Hopping      | -57.15          | -20         | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | Hopping      | -56.29          | -20         | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | Hopping      | -56.45          | -20         | Pass    |


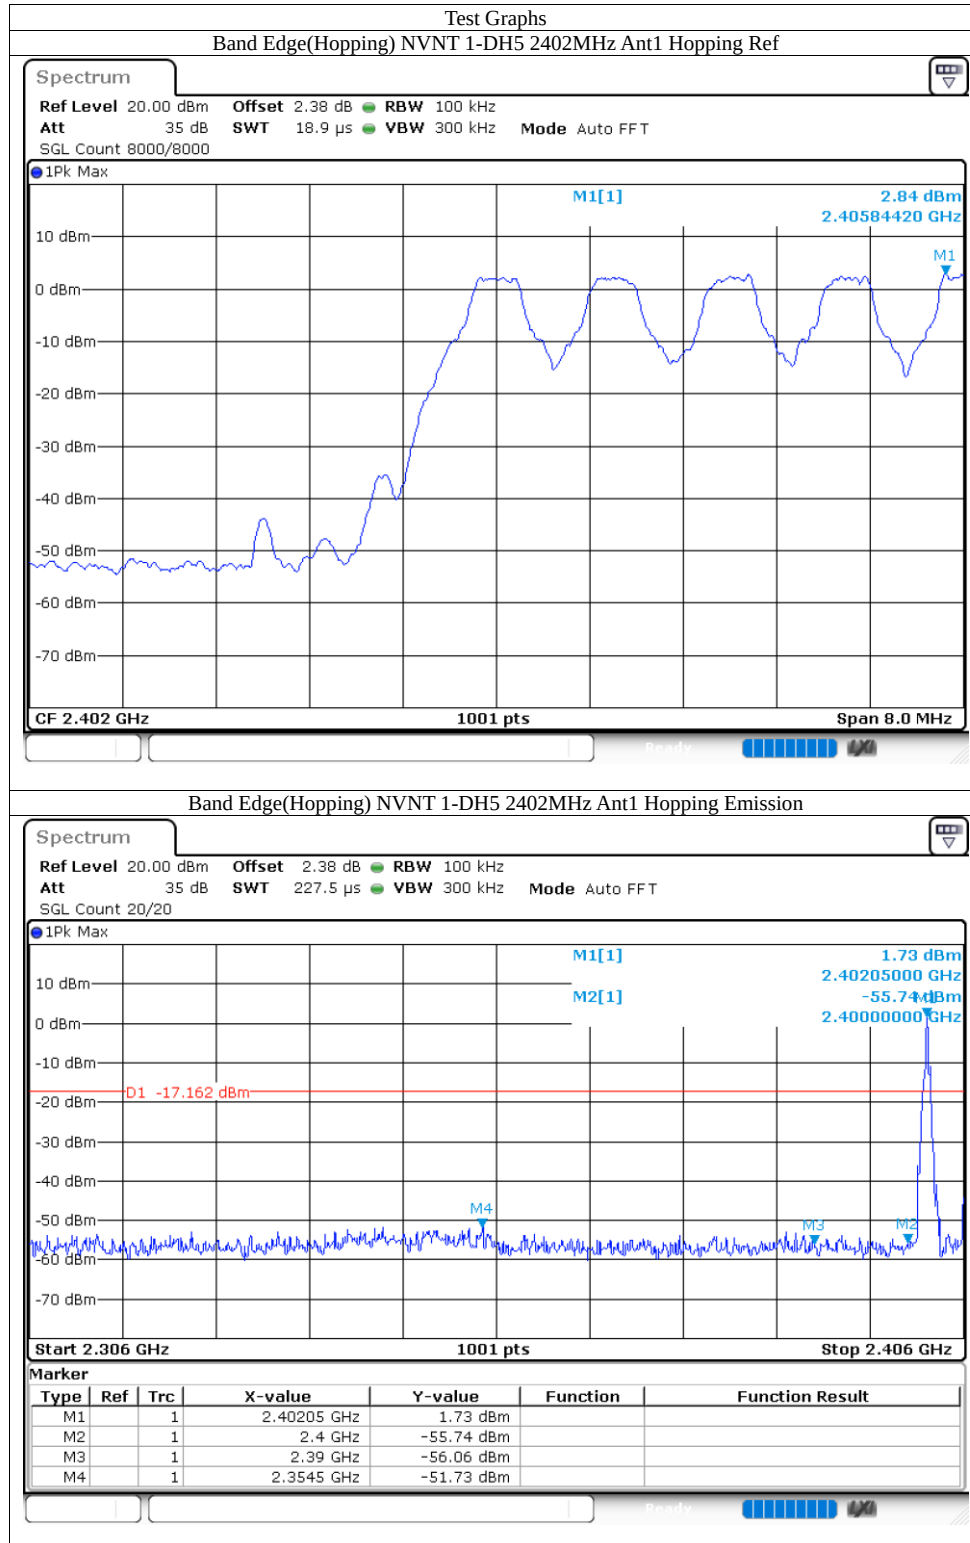


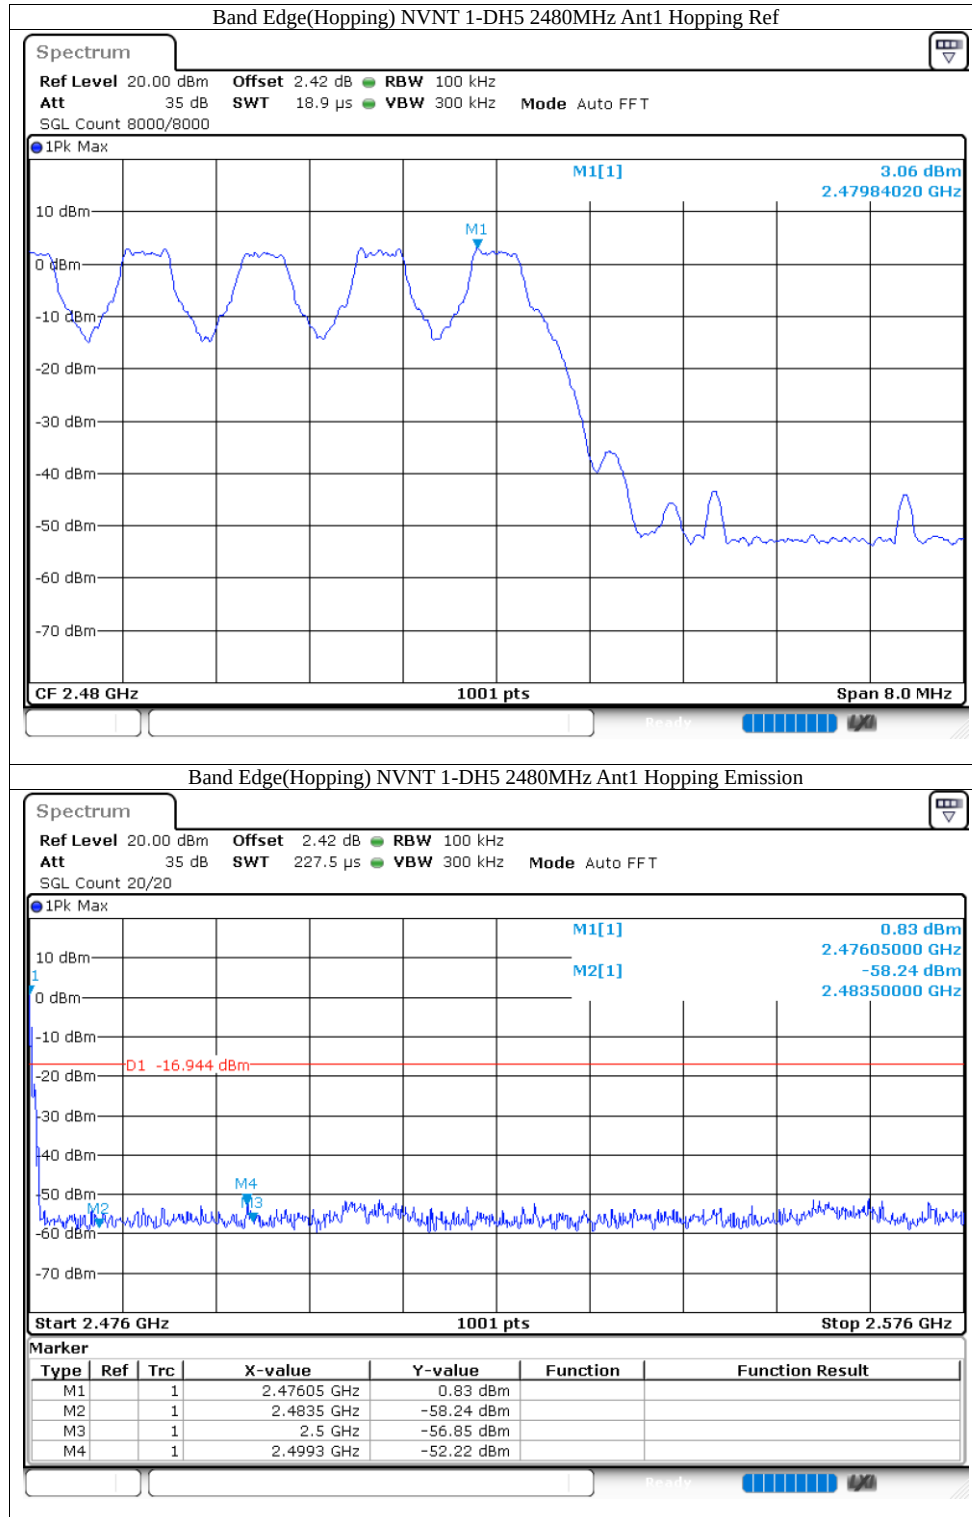

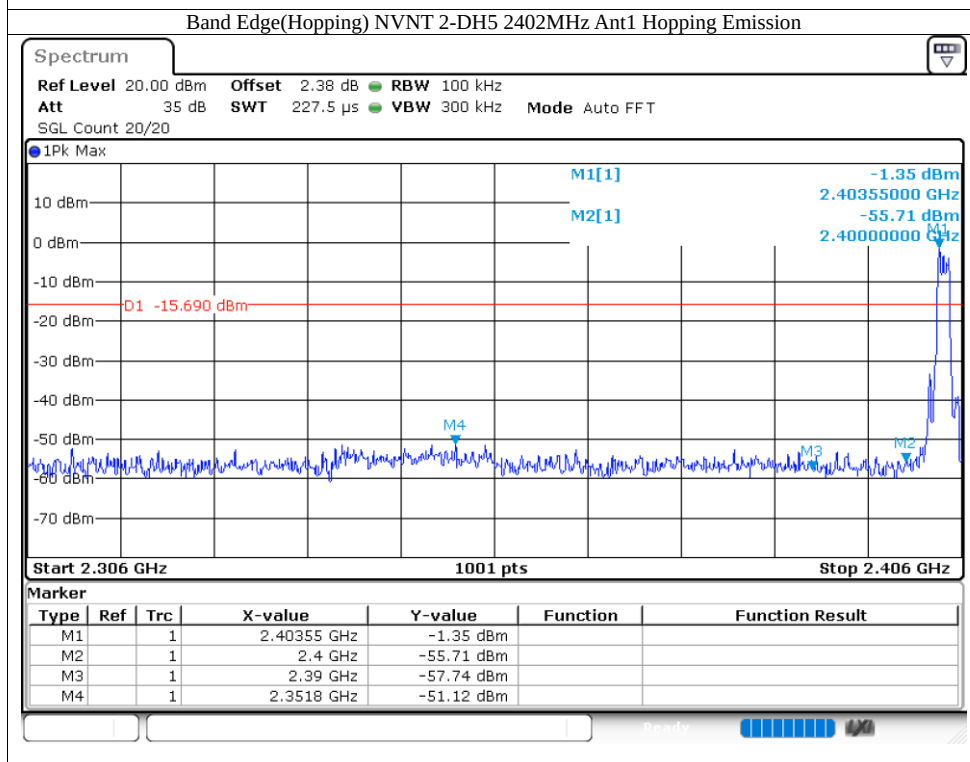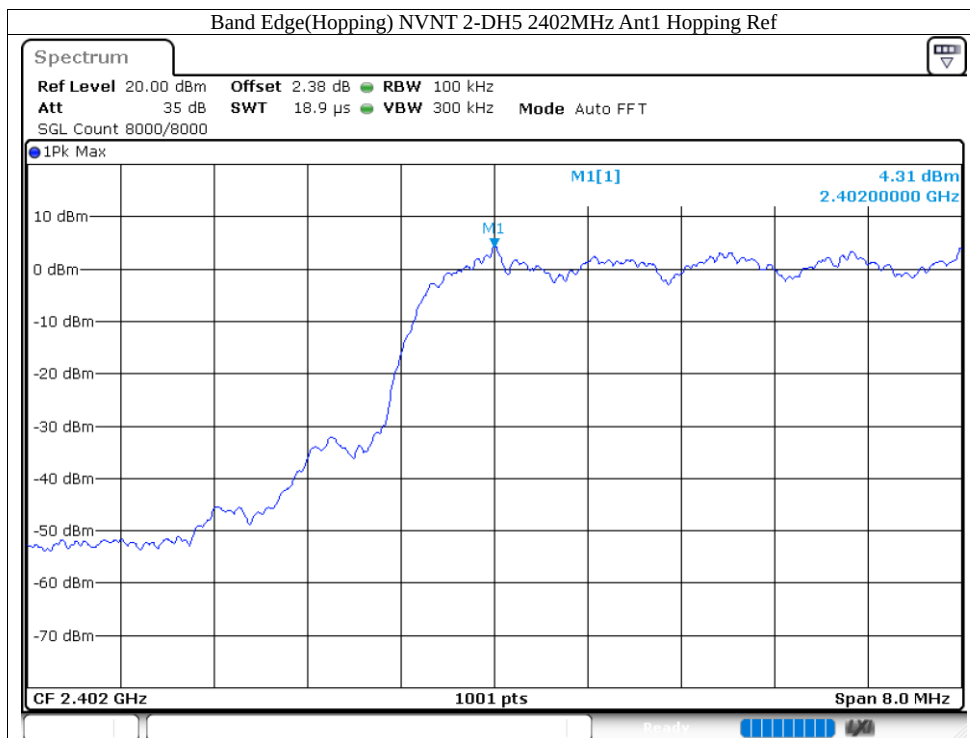

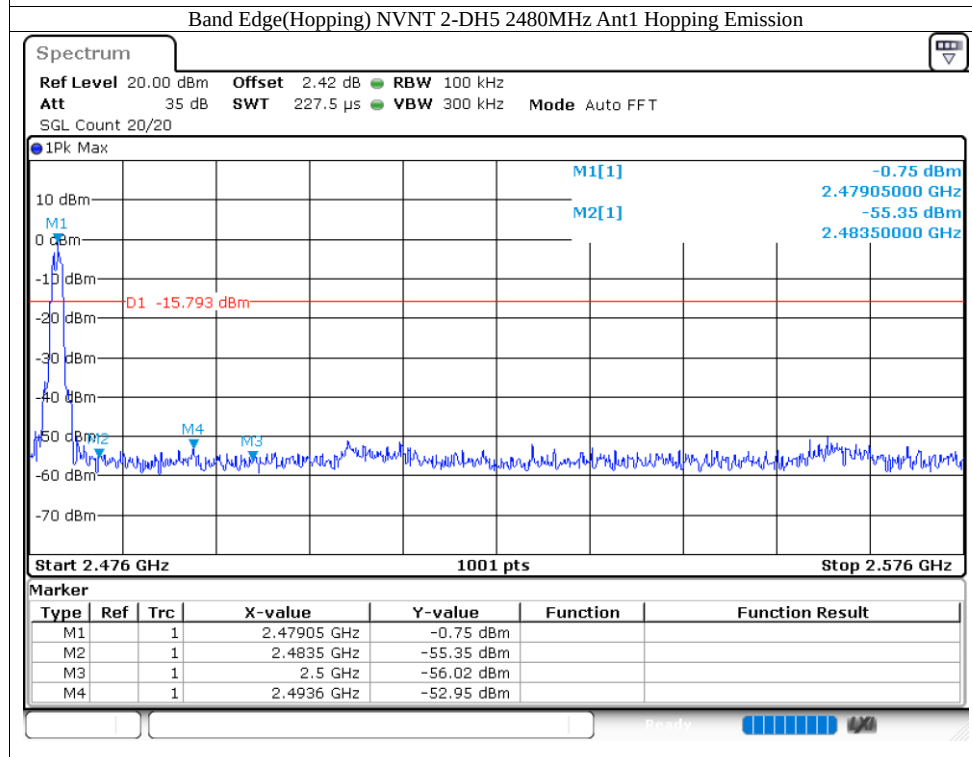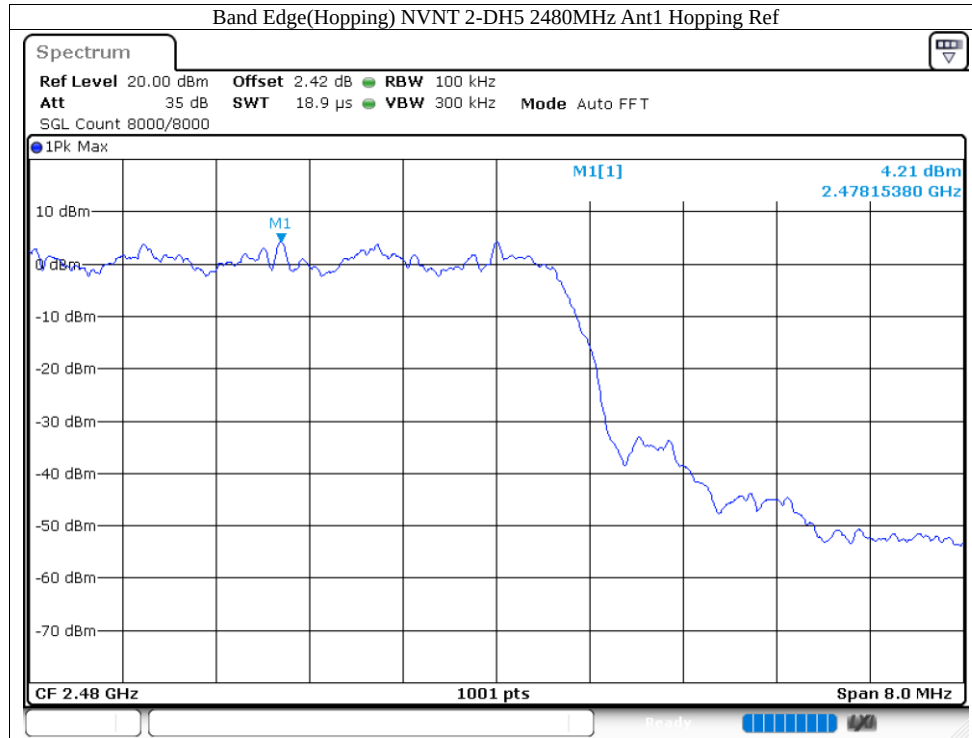


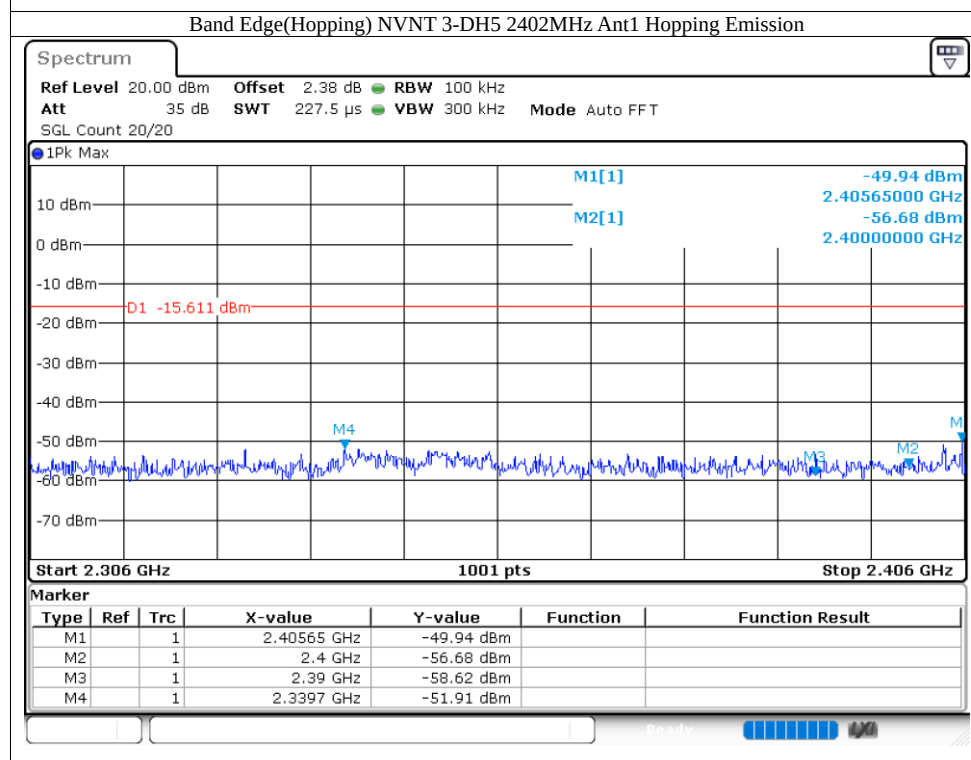
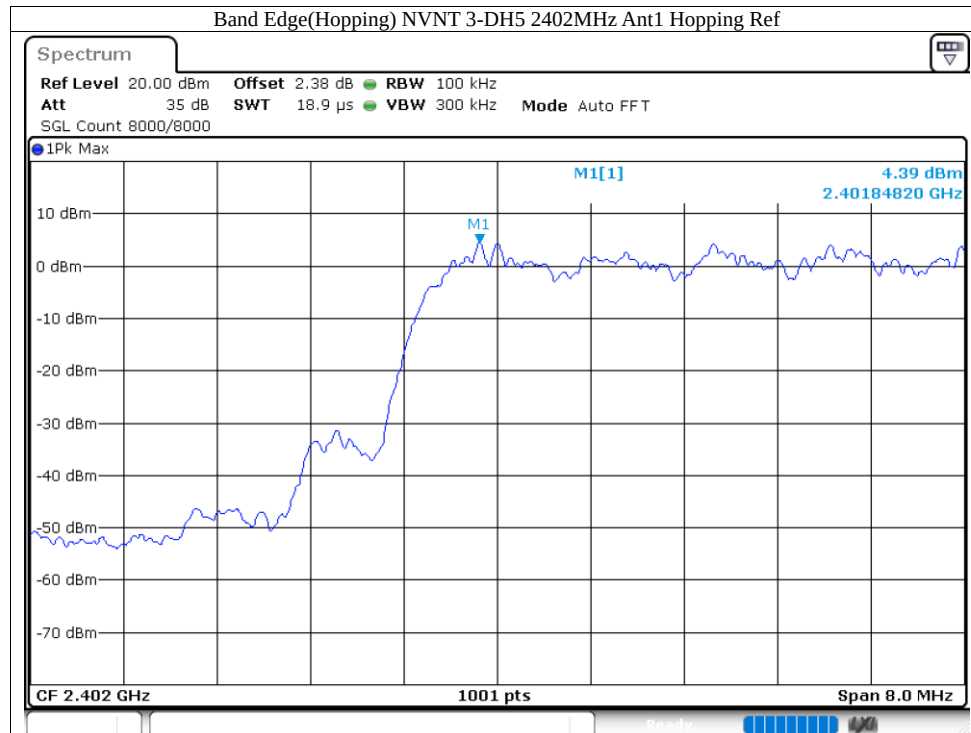


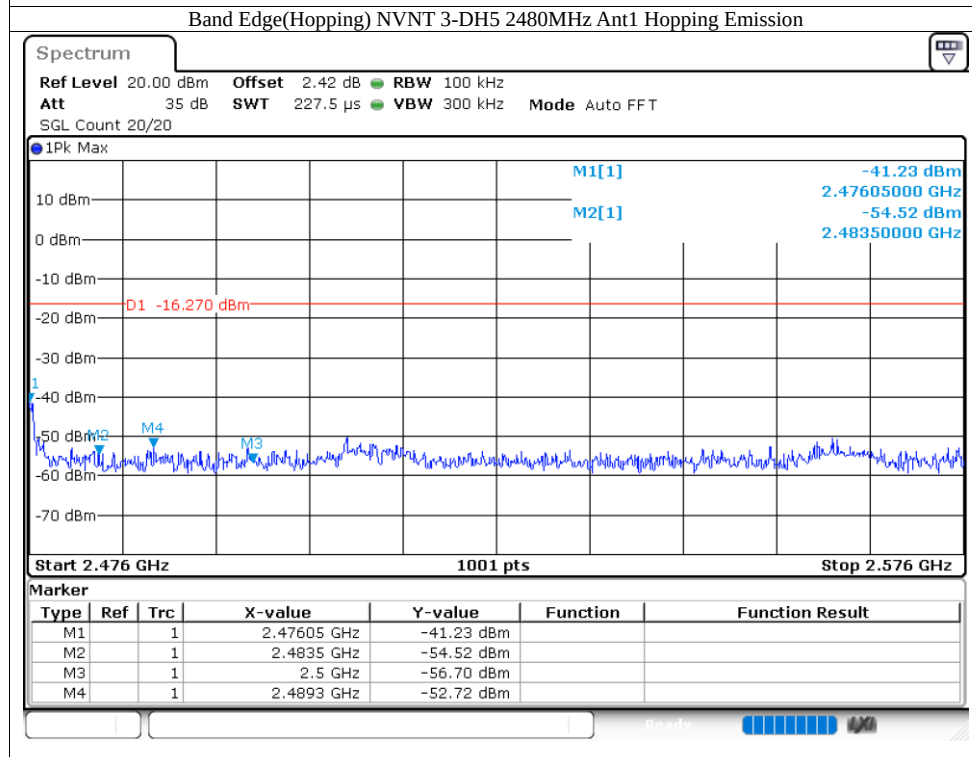
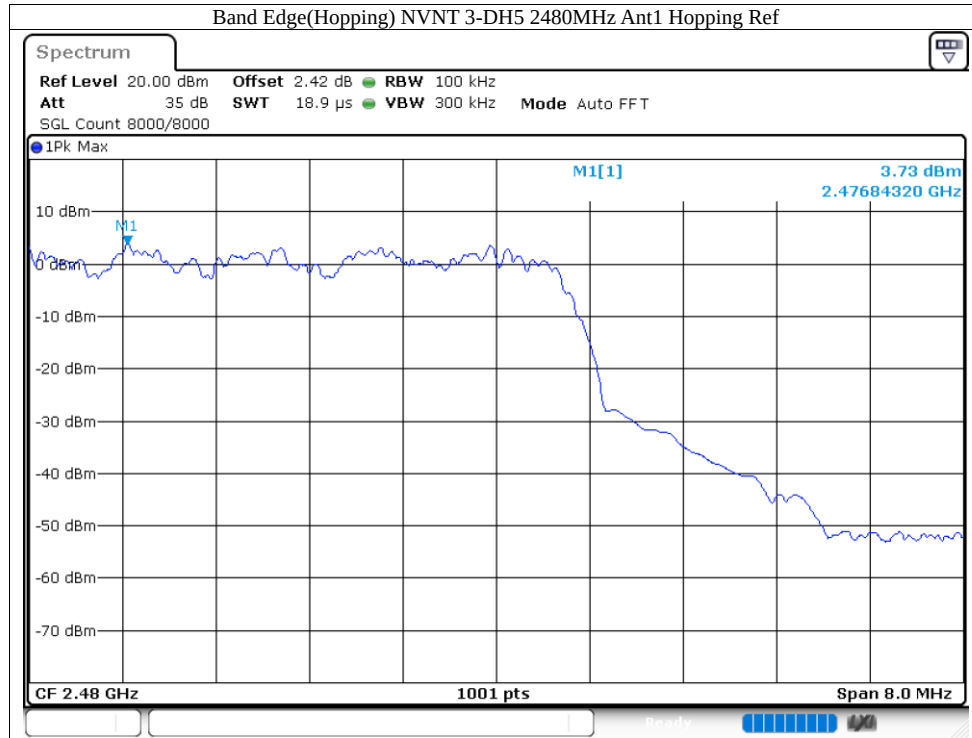




#### 8.9 CONDUCTED RF SPURIOUS EMISSION



| Condition | Mode  | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|-------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | 1-DH5 | 2402            | Ant1    | -52.96          | -20         | Pass    |
| NVNT      | 1-DH5 | 2441            | Ant1    | -52.94          | -20         | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | -53.23          | -20         | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | -52.74          | -20         | Pass    |
| NVNT      | 2-DH5 | 2441            | Ant1    | -52.01          | -20         | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | -54.74          | -20         | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | -53.67          | -20         | Pass    |
| NVNT      | 3-DH5 | 2441            | Ant1    | -53.5           | -20         | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | -50.96          | -20         | Pass    |


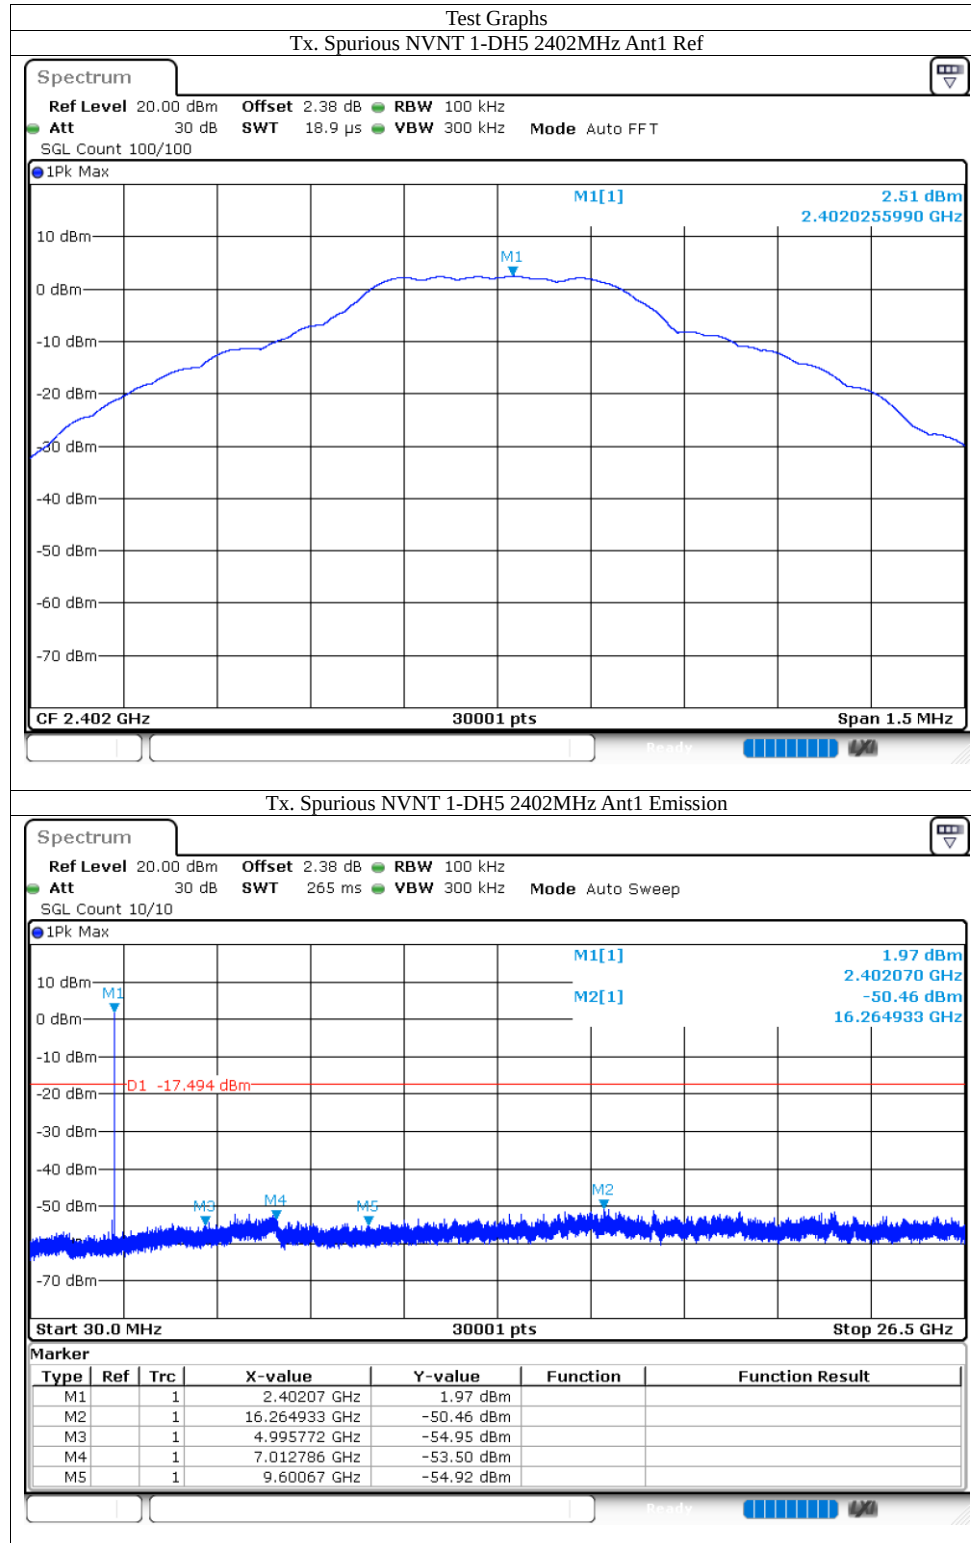


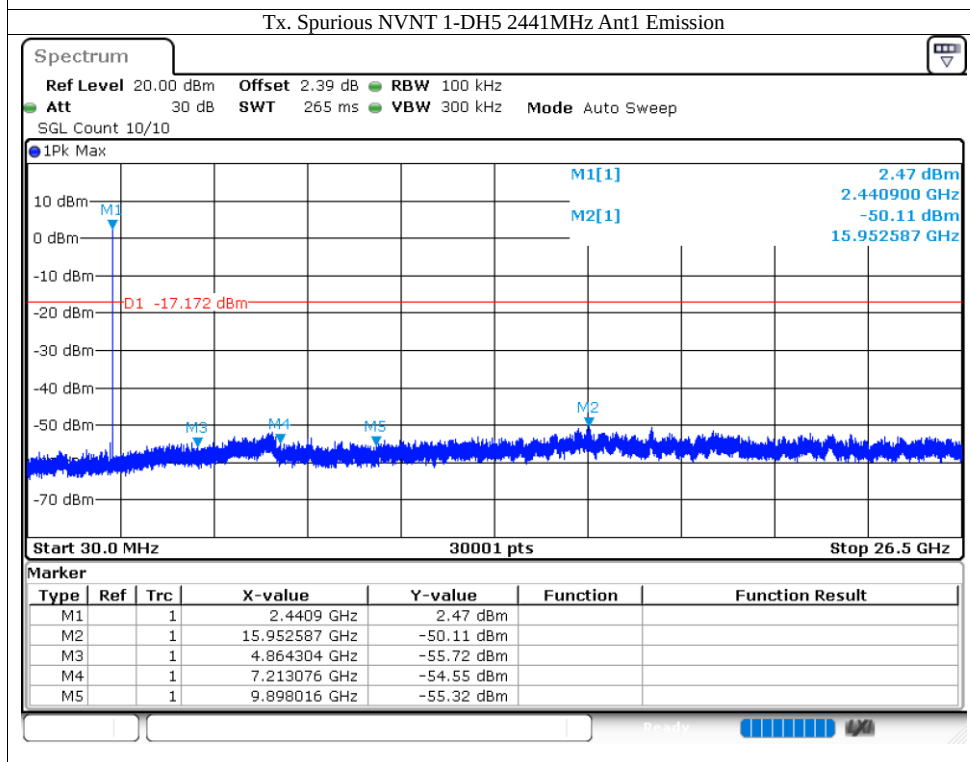
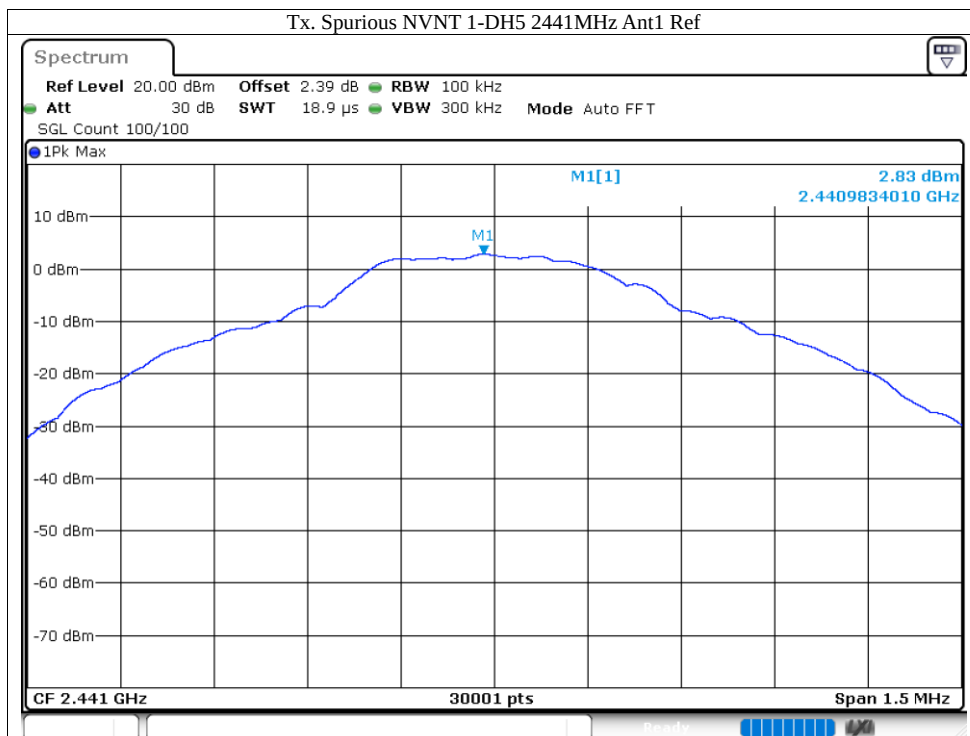


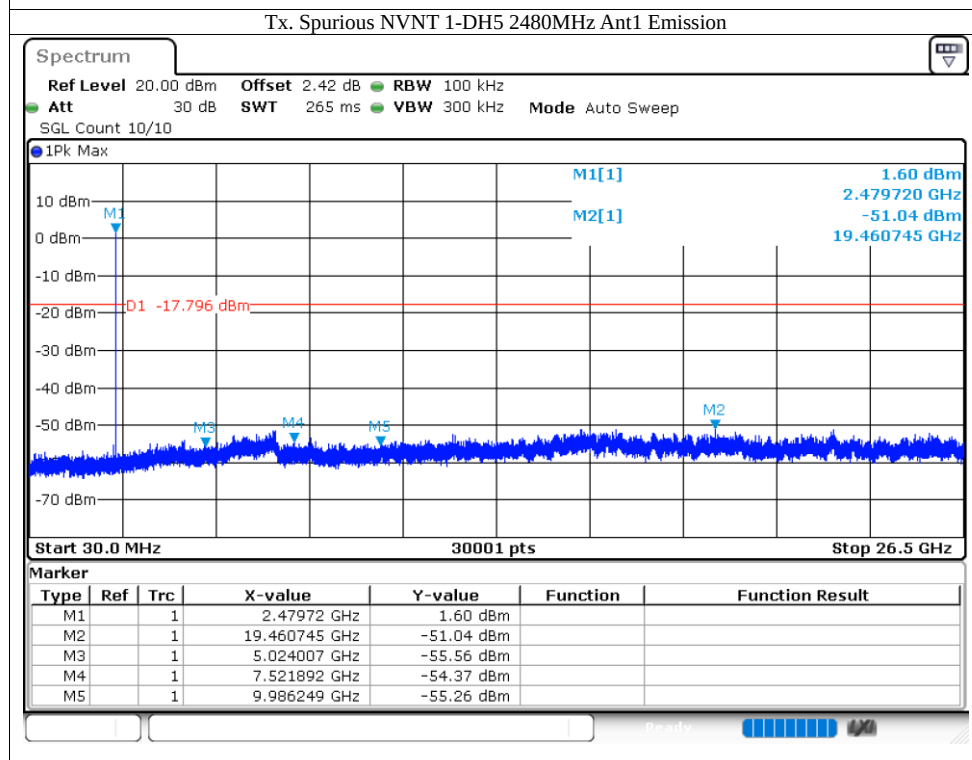
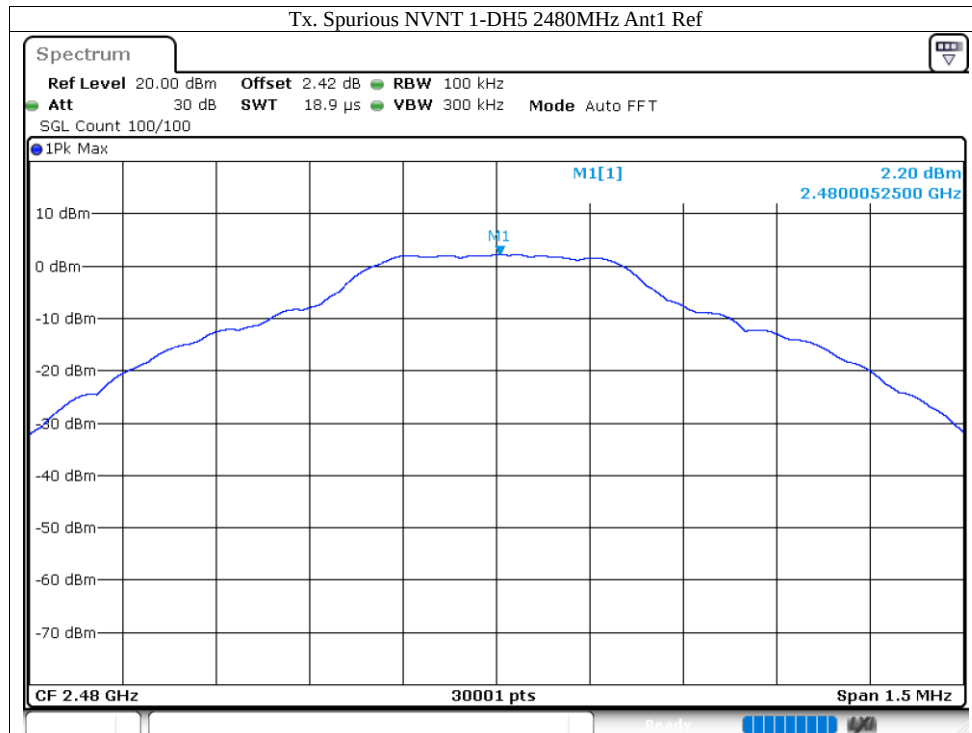


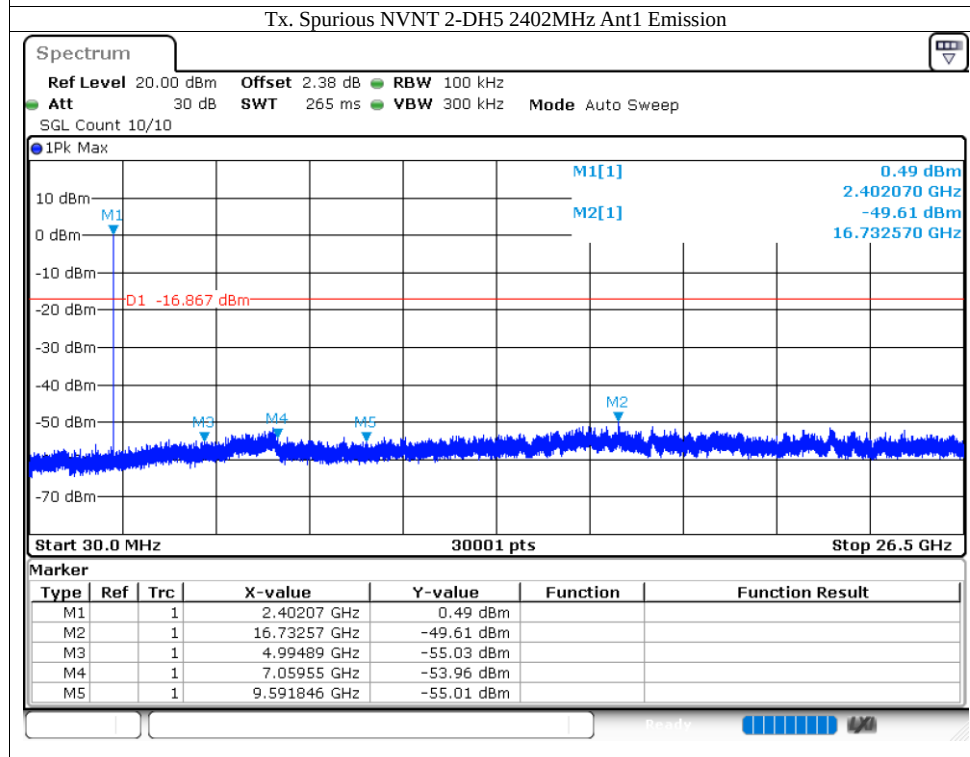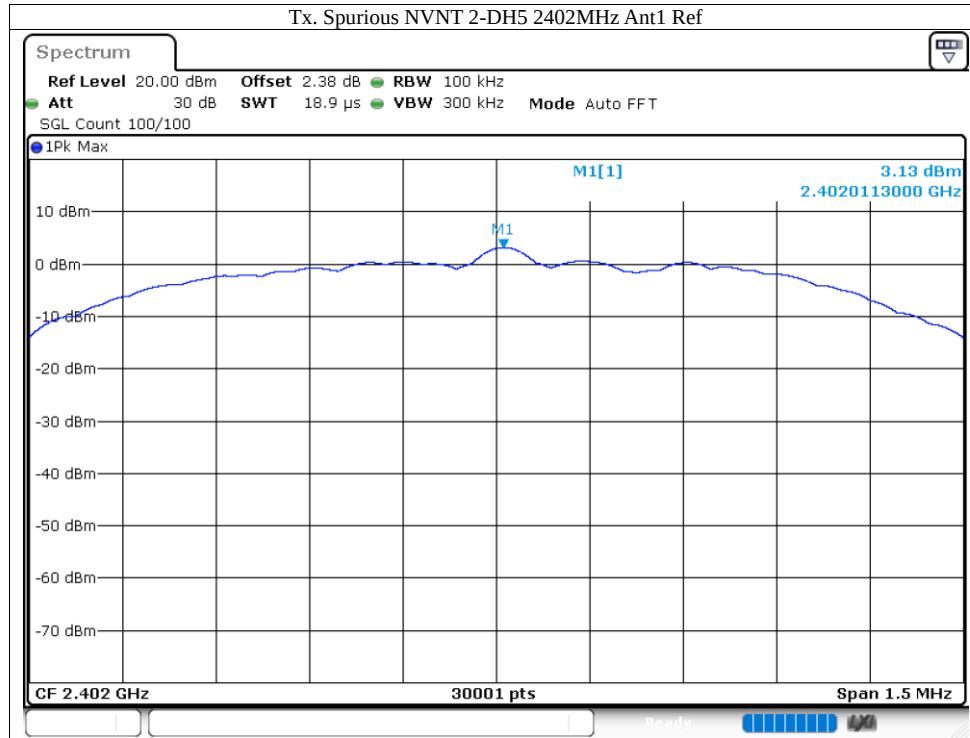


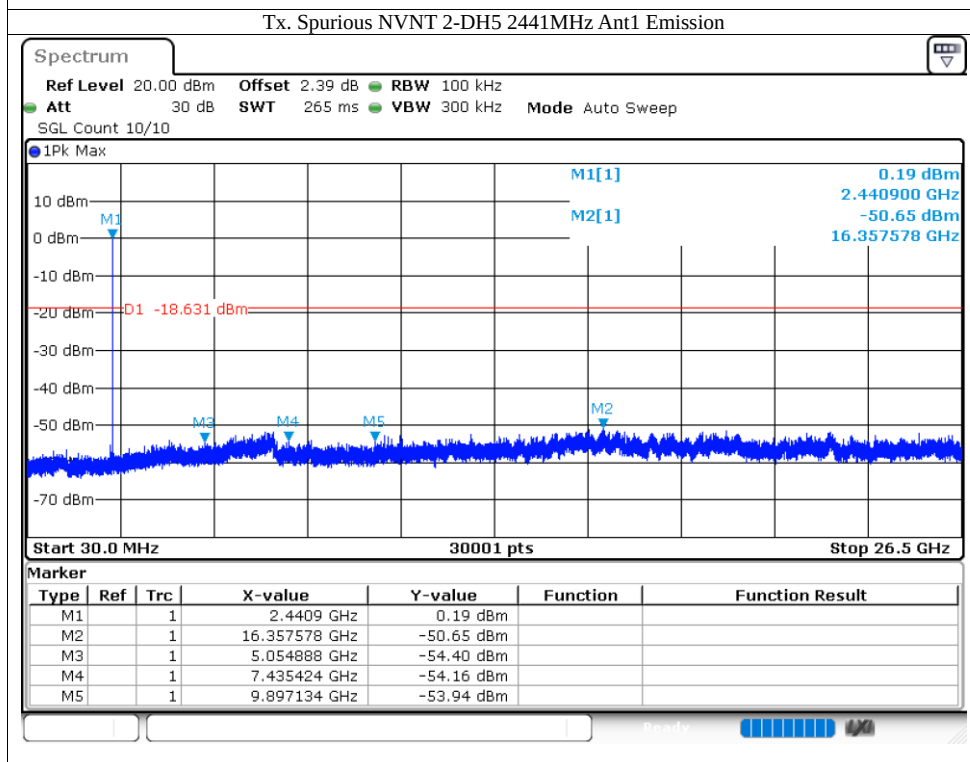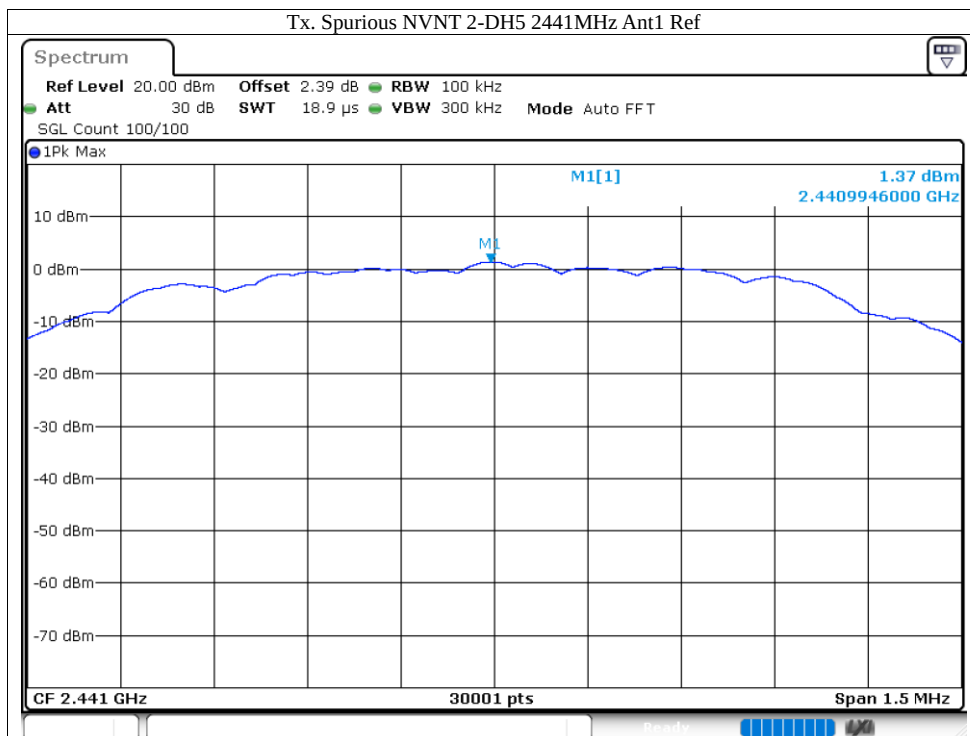

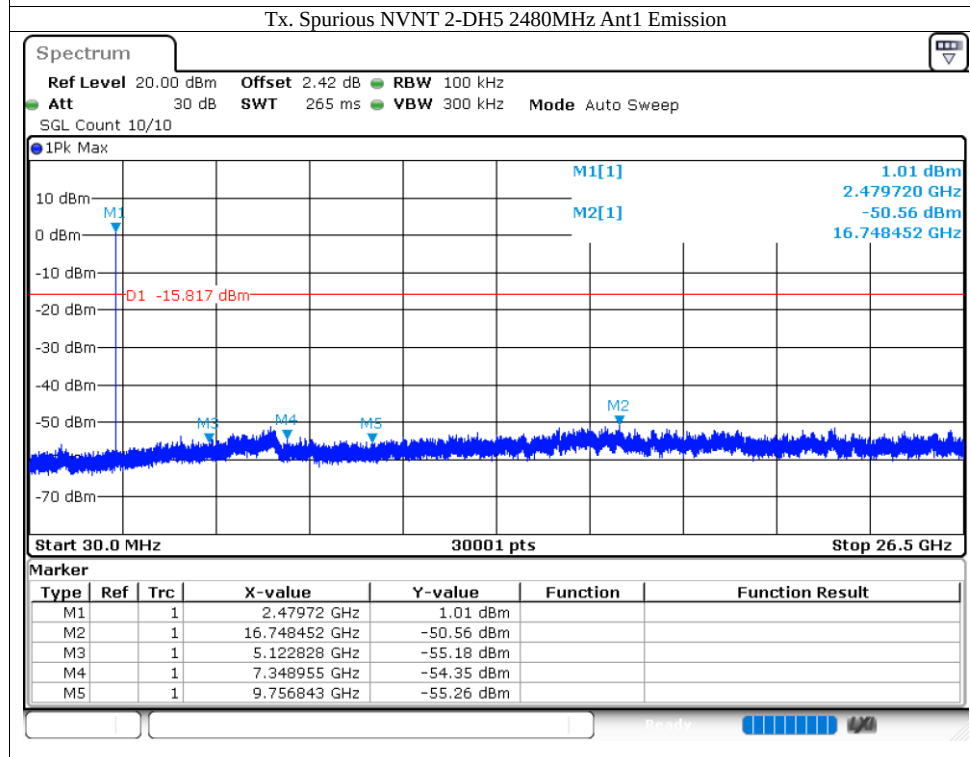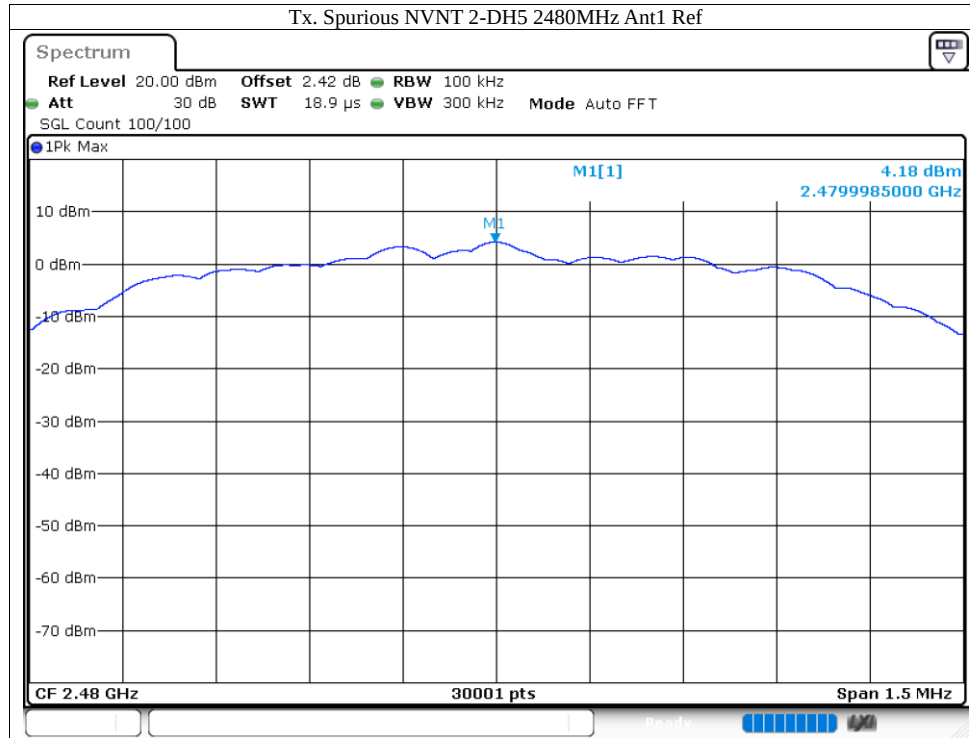

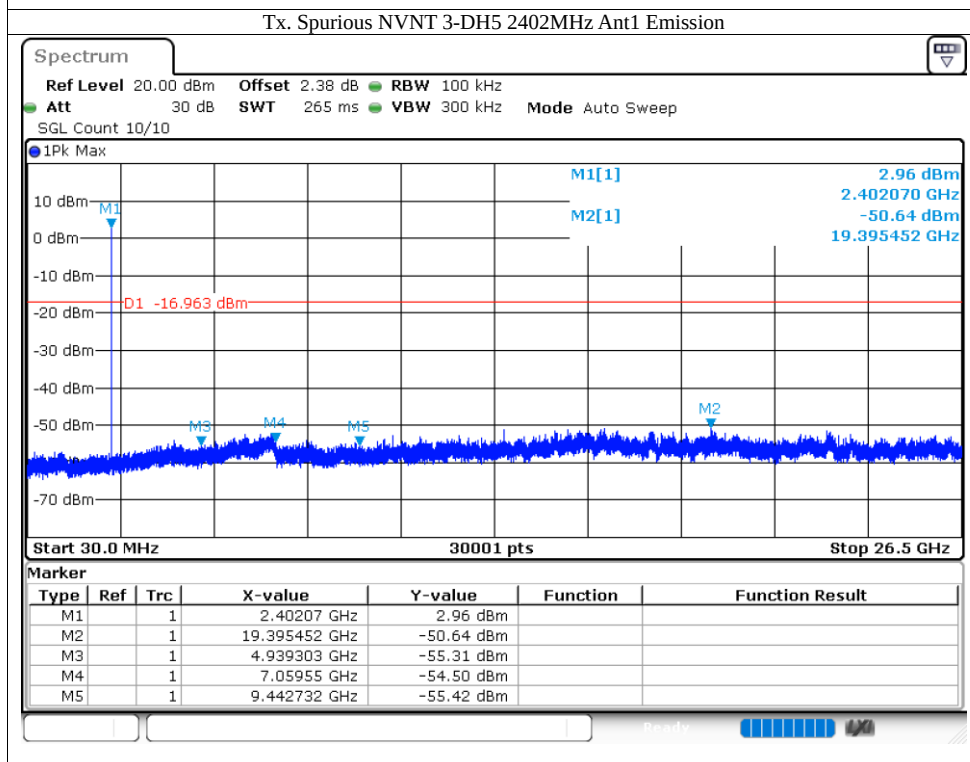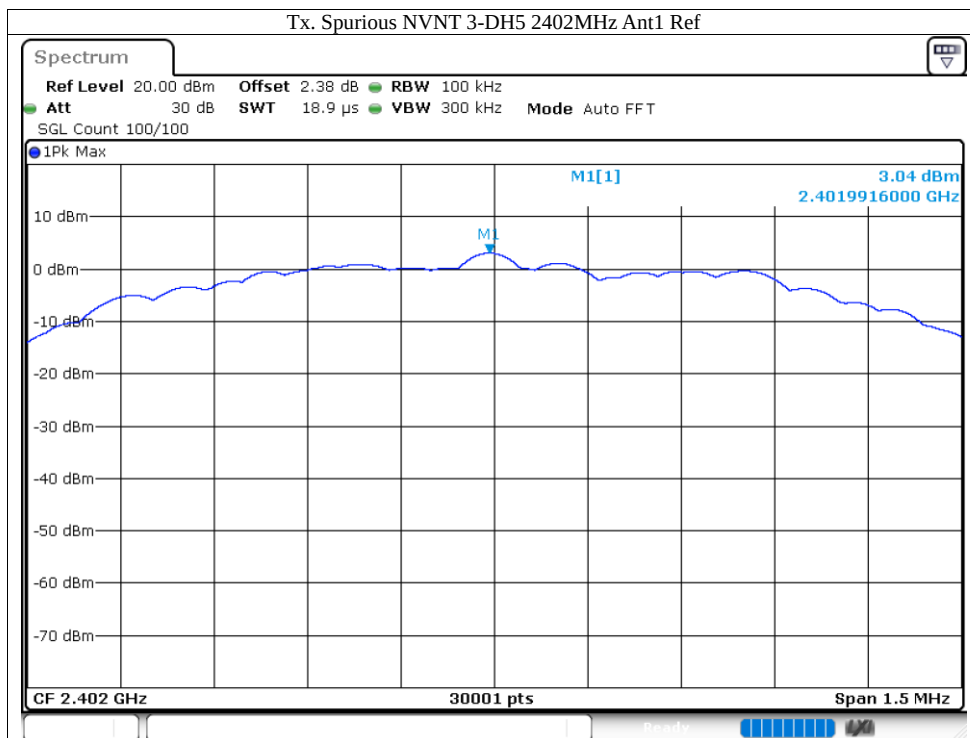

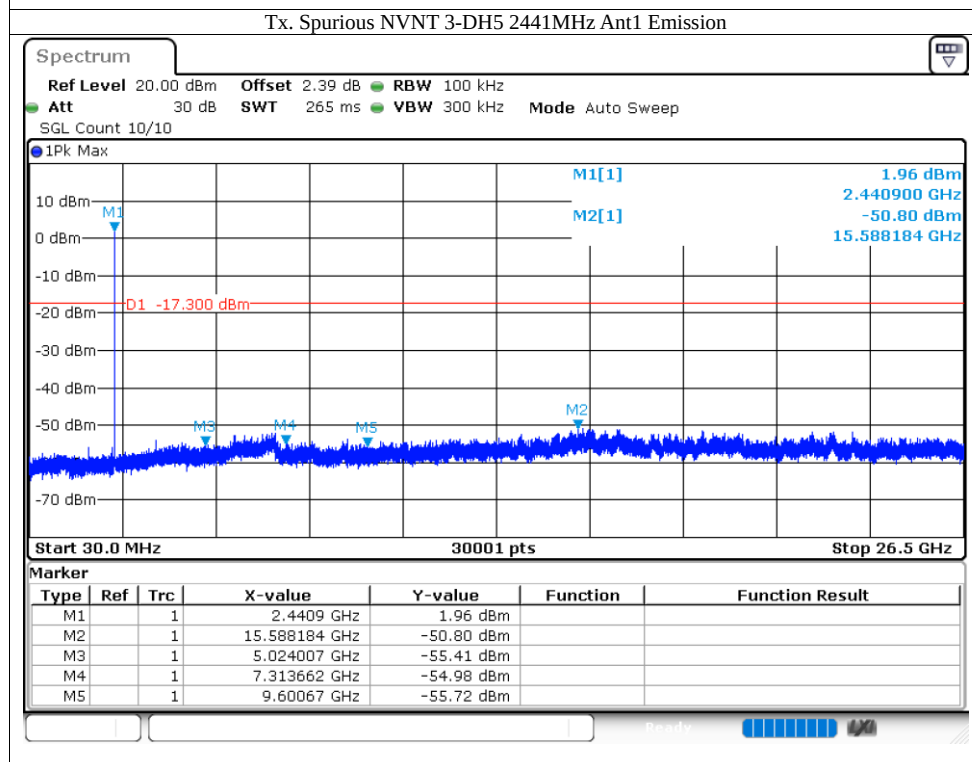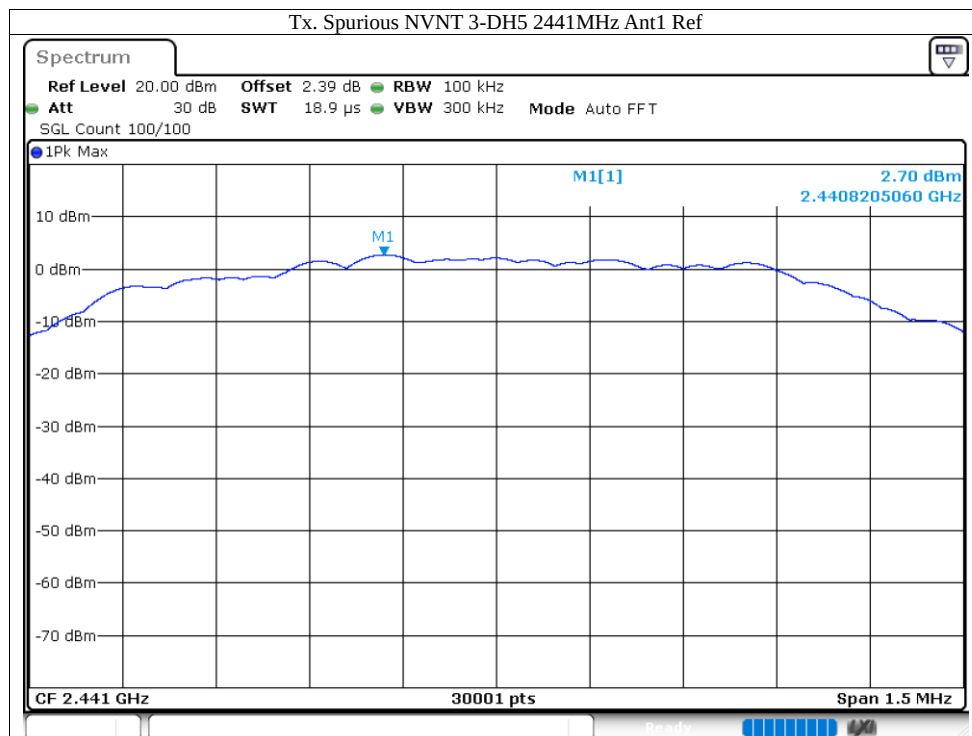

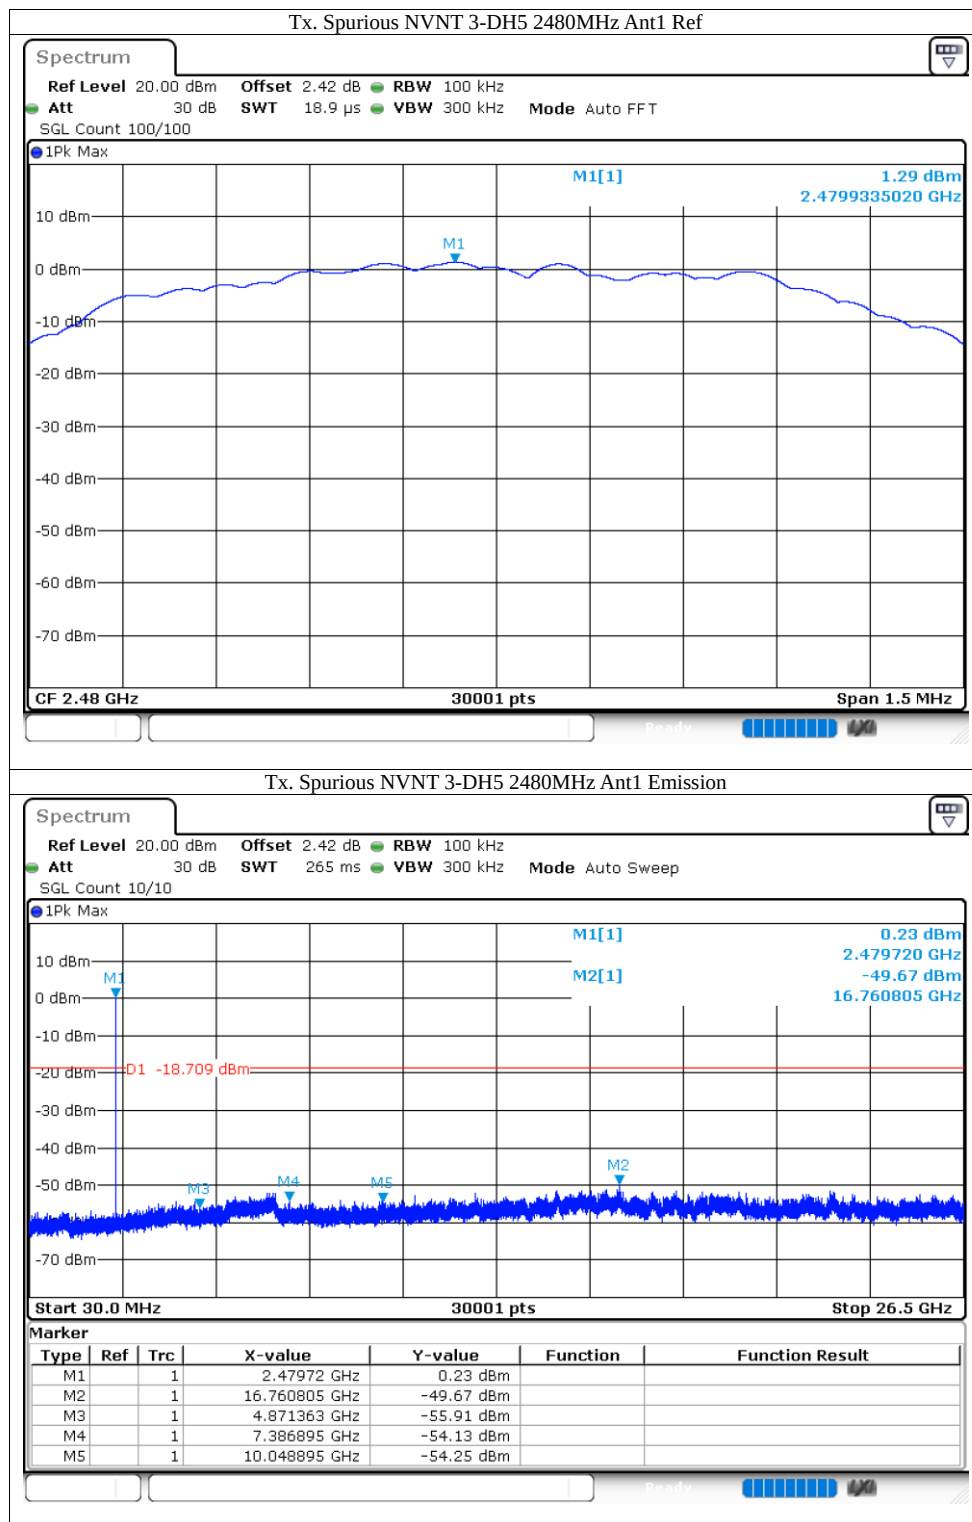

END OF REPORT