

Appendix for LTE Band 2

Applicant: Shenzhen Xiaopai Technology Co., Ltd.

**Address: Unit A 8F 806, skyworth bldg, Gaoxin Ave.
1.S., Nanshan District, Shenzhen, Guangdong
Province, China**

Product Name: Smart Camera

Model: LC2517

TABLE OF CONTENTS

APPENDIX A: CONDUCTED POWER OUTPUT DATA.....	3
APPENDIX B: PEAK-TO-AVERAGE RATIO(CCDF).....	8
APPENDIX C: 26DB BANDWIDTH AND OCCUPIED BANDWIDTH	31
APPENDIX D: BAND EDGE	44
APPENDIX E: CONDUCTED SPURIOUS EMISSION.....	68
APPENDIX F: FREQUENCY STABILITY	133

Appendix A: Conducted Power Output Data

Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Result (dBm)	EIRP (dBm)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	23.36	24.83	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	22.53	24	PASS
Band2	1.4MHz	QPSK	18607	1RB#2	23.42	24.89	PASS
Band2	1.4MHz	16QAM	18607	1RB#2	22.30	23.77	PASS
Band2	1.4MHz	QPSK	18607	1RB#5	23.27	24.74	PASS
Band2	1.4MHz	16QAM	18607	1RB#5	22.23	23.7	PASS
Band2	1.4MHz	QPSK	18607	3RB#0	23.37	24.84	PASS
Band2	1.4MHz	16QAM	18607	3RB#0	22.08	23.55	PASS
Band2	1.4MHz	QPSK	18607	3RB#1	23.26	24.73	PASS
Band2	1.4MHz	16QAM	18607	3RB#1	22.10	23.57	PASS
Band2	1.4MHz	QPSK	18607	3RB#3	23.11	24.58	PASS
Band2	1.4MHz	16QAM	18607	3RB#3	22.00	23.47	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	22.18	23.65	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	21.11	22.58	PASS
Band2	1.4MHz	QPSK	18900	1RB#0	23.48	24.95	PASS
Band2	1.4MHz	16QAM	18900	1RB#0	22.36	23.83	PASS
Band2	1.4MHz	QPSK	18900	1RB#2	23.36	24.83	PASS
Band2	1.4MHz	16QAM	18900	1RB#2	22.09	23.56	PASS
Band2	1.4MHz	QPSK	18900	1RB#5	23.22	24.69	PASS
Band2	1.4MHz	16QAM	18900	1RB#5	22.33	23.8	PASS
Band2	1.4MHz	QPSK	18900	3RB#0	21.46	22.93	PASS
Band2	1.4MHz	16QAM	18900	3RB#0	22.28	23.75	PASS
Band2	1.4MHz	QPSK	18900	3RB#1	23.24	24.71	PASS
Band2	1.4MHz	16QAM	18900	3RB#1	22.34	23.81	PASS
Band2	1.4MHz	QPSK	18900	3RB#3	23.25	24.72	PASS
Band2	1.4MHz	16QAM	18900	3RB#3	22.16	23.63	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	22.34	23.81	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	21.32	22.79	PASS
Band2	1.4MHz	QPSK	19193	1RB#0	23.35	24.82	PASS
Band2	1.4MHz	16QAM	19193	1RB#0	22.29	23.76	PASS
Band2	1.4MHz	QPSK	19193	1RB#2	23.26	24.73	PASS
Band2	1.4MHz	16QAM	19193	1RB#2	21.94	23.41	PASS
Band2	1.4MHz	QPSK	19193	1RB#5	23.05	24.52	PASS
Band2	1.4MHz	16QAM	19193	1RB#5	22.03	23.5	PASS
Band2	1.4MHz	QPSK	19193	3RB#0	23.10	24.57	PASS
Band2	1.4MHz	16QAM	19193	3RB#0	22.12	23.59	PASS
Band2	1.4MHz	QPSK	19193	3RB#1	23.01	24.48	PASS

Band2	1.4MHz	16QAM	19193	3RB#1	22.39	23.86	PASS
Band2	1.4MHz	QPSK	19193	3RB#3	23.07	24.54	PASS
Band2	1.4MHz	16QAM	19193	3RB#3	21.94	23.41	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	22.17	23.64	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	21.14	22.61	PASS
Band2	3MHz	QPSK	18615	1RB#0	22.99	24.46	PASS
Band2	3MHz	16QAM	18615	1RB#0	21.73	23.2	PASS
Band2	3MHz	QPSK	18615	1RB#8	22.86	24.33	PASS
Band2	3MHz	16QAM	18615	1RB#8	22.13	23.6	PASS
Band2	3MHz	QPSK	18615	1RB#14	22.71	24.18	PASS
Band2	3MHz	16QAM	18615	1RB#14	21.62	23.09	PASS
Band2	3MHz	QPSK	18615	8RB#0	21.88	23.35	PASS
Band2	3MHz	16QAM	18615	8RB#0	20.97	22.44	PASS
Band2	3MHz	QPSK	18615	8RB#4	21.90	23.37	PASS
Band2	3MHz	16QAM	18615	8RB#4	20.85	22.32	PASS
Band2	3MHz	QPSK	18615	8RB#7	21.88	23.35	PASS
Band2	3MHz	16QAM	18615	8RB#7	20.93	22.4	PASS
Band2	3MHz	QPSK	18615	15RB#0	21.87	23.34	PASS
Band2	3MHz	16QAM	18615	15RB#0	22.26	23.73	PASS
Band2	3MHz	QPSK	18900	1RB#0	23.50	24.97	PASS
Band2	3MHz	16QAM	18900	1RB#0	22.29	23.76	PASS
Band2	3MHz	QPSK	18900	1RB#8	23.39	24.86	PASS
Band2	3MHz	16QAM	18900	1RB#8	22.15	23.62	PASS
Band2	3MHz	QPSK	18900	1RB#14	23.02	24.49	PASS
Band2	3MHz	16QAM	18900	1RB#14	22.01	23.48	PASS
Band2	3MHz	QPSK	18900	8RB#0	22.38	23.85	PASS
Band2	3MHz	16QAM	18900	8RB#0	21.43	22.9	PASS
Band2	3MHz	QPSK	18900	8RB#4	22.39	23.86	PASS
Band2	3MHz	16QAM	18900	8RB#4	21.39	22.86	PASS
Band2	3MHz	QPSK	18900	8RB#7	22.30	23.77	PASS
Band2	3MHz	16QAM	18900	8RB#7	21.35	22.82	PASS
Band2	3MHz	QPSK	18900	15RB#0	22.26	23.73	PASS
Band2	3MHz	16QAM	18900	15RB#0	21.24	22.71	PASS
Band2	3MHz	QPSK	19185	1RB#0	22.97	24.44	PASS
Band2	3MHz	16QAM	19185	1RB#0	22.64	24.11	PASS
Band2	3MHz	QPSK	19185	1RB#8	23.34	24.81	PASS
Band2	3MHz	16QAM	19185	1RB#8	22.33	23.8	PASS
Band2	3MHz	QPSK	19185	1RB#14	22.94	24.41	PASS
Band2	3MHz	16QAM	19185	1RB#14	22.18	23.65	PASS
Band2	3MHz	QPSK	19185	8RB#0	22.33	23.8	PASS
Band2	3MHz	16QAM	19185	8RB#0	21.48	22.95	PASS
Band2	3MHz	QPSK	19185	8RB#4	22.34	23.81	PASS
Band2	3MHz	16QAM	19185	8RB#4	21.27	22.74	PASS

Band2	3MHz	QPSK	19185	8RB#7	22.23	23.7	PASS
Band2	3MHz	16QAM	19185	8RB#7	21.33	22.8	PASS
Band2	3MHz	QPSK	19185	15RB#0	22.27	23.74	PASS
Band2	3MHz	16QAM	19185	15RB#0	21.28	22.75	PASS
Band2	5MHz	QPSK	18625	1RB#0	23.33	24.8	PASS
Band2	5MHz	16QAM	18625	1RB#0	22.33	23.8	PASS
Band2	5MHz	QPSK	18625	1RB#12	22.91	24.38	PASS
Band2	5MHz	16QAM	18625	1RB#12	22.05	23.52	PASS
Band2	5MHz	QPSK	18625	1RB#24	23.00	24.47	PASS
Band2	5MHz	16QAM	18625	1RB#24	22.15	23.62	PASS
Band2	5MHz	QPSK	18625	12RB#0	22.01	23.48	PASS
Band2	5MHz	16QAM	18625	12RB#0	21.17	22.64	PASS
Band2	5MHz	QPSK	18625	12RB#6	22.00	23.47	PASS
Band2	5MHz	16QAM	18625	12RB#6	22.43	23.9	PASS
Band2	5MHz	QPSK	18625	12RB#13	22.09	23.56	PASS
Band2	5MHz	16QAM	18625	12RB#13	21.14	22.61	PASS
Band2	5MHz	QPSK	18625	25RB#0	22.07	23.54	PASS
Band2	5MHz	16QAM	18625	25RB#0	21.13	22.6	PASS
Band2	5MHz	QPSK	18900	1RB#0	23.30	24.77	PASS
Band2	5MHz	16QAM	18900	1RB#0	22.17	23.64	PASS
Band2	5MHz	QPSK	18900	1RB#12	22.92	24.39	PASS
Band2	5MHz	16QAM	18900	1RB#12	21.87	23.34	PASS
Band2	5MHz	QPSK	18900	1RB#24	22.81	24.28	PASS
Band2	5MHz	16QAM	18900	1RB#24	21.82	23.29	PASS
Band2	5MHz	QPSK	18900	12RB#0	22.12	23.59	PASS
Band2	5MHz	16QAM	18900	12RB#0	21.19	22.66	PASS
Band2	5MHz	QPSK	18900	12RB#6	22.12	23.59	PASS
Band2	5MHz	16QAM	18900	12RB#6	21.14	22.61	PASS
Band2	5MHz	QPSK	18900	12RB#13	22.04	23.51	PASS
Band2	5MHz	16QAM	18900	12RB#13	21.10	22.57	PASS
Band2	5MHz	QPSK	18900	25RB#0	22.08	23.55	PASS
Band2	5MHz	16QAM	18900	25RB#0	21.15	22.62	PASS
Band2	5MHz	QPSK	19175	1RB#0	23.93	25.4	PASS
Band2	5MHz	16QAM	19175	1RB#0	22.34	23.81	PASS
Band2	5MHz	QPSK	19175	1RB#12	23.09	24.56	PASS
Band2	5MHz	16QAM	19175	1RB#12	22.01	23.48	PASS
Band2	5MHz	QPSK	19175	1RB#24	23.00	24.47	PASS
Band2	5MHz	16QAM	19175	1RB#24	21.80	23.27	PASS
Band2	5MHz	QPSK	19175	12RB#0	22.47	23.94	PASS
Band2	5MHz	16QAM	19175	12RB#0	21.62	23.09	PASS
Band2	5MHz	QPSK	19175	12RB#6	22.36	23.83	PASS
Band2	5MHz	16QAM	19175	12RB#6	21.36	22.83	PASS
Band2	5MHz	QPSK	19175	12RB#13	22.23	23.7	PASS

Band2	5MHz	16QAM	19175	12RB#13	21.34	22.81	PASS
Band2	5MHz	QPSK	19175	25RB#0	22.36	23.83	PASS
Band2	5MHz	16QAM	19175	25RB#0	21.35	22.82	PASS
Band2	10MHz	QPSK	18650	1RB#0	23.28	24.75	PASS
Band2	10MHz	16QAM	18650	1RB#0	22.11	23.58	PASS
Band2	10MHz	QPSK	18650	1RB#24	22.89	24.36	PASS
Band2	10MHz	16QAM	18650	1RB#24	22.37	23.84	PASS
Band2	10MHz	QPSK	18650	1RB#49	22.78	24.25	PASS
Band2	10MHz	16QAM	18650	1RB#49	21.89	23.36	PASS
Band2	10MHz	QPSK	18650	25RB#0	22.19	23.66	PASS
Band2	10MHz	16QAM	18650	25RB#0	21.25	22.72	PASS
Band2	10MHz	QPSK	18650	25RB#12	22.03	23.5	PASS
Band2	10MHz	16QAM	18650	25RB#12	21.11	22.58	PASS
Band2	10MHz	QPSK	18650	25RB#25	21.96	23.43	PASS
Band2	10MHz	16QAM	18650	25RB#25	20.98	22.45	PASS
Band2	10MHz	QPSK	18650	50RB#0	22.09	23.56	PASS
Band2	10MHz	QPSK	18900	1RB#0	23.71	25.18	PASS
Band2	10MHz	16QAM	18900	1RB#0	22.78	24.25	PASS
Band2	10MHz	QPSK	18900	1RB#24	23.36	24.83	PASS
Band2	10MHz	16QAM	18900	1RB#24	22.46	23.93	PASS
Band2	10MHz	QPSK	18900	1RB#49	22.90	24.37	PASS
Band2	10MHz	16QAM	18900	1RB#49	22.17	23.64	PASS
Band2	10MHz	QPSK	18900	25RB#0	22.42	23.89	PASS
Band2	10MHz	16QAM	18900	25RB#0	21.56	23.03	PASS
Band2	10MHz	QPSK	18900	25RB#12	22.37	23.84	PASS
Band2	10MHz	16QAM	18900	25RB#12	21.44	22.91	PASS
Band2	10MHz	QPSK	18900	25RB#25	22.19	23.66	PASS
Band2	10MHz	16QAM	18900	25RB#25	21.33	22.8	PASS
Band2	10MHz	QPSK	18900	50RB#0	22.31	23.78	PASS
Band2	10MHz	QPSK	19150	1RB#0	23.37	24.84	PASS
Band2	10MHz	16QAM	19150	1RB#0	22.13	23.6	PASS
Band2	10MHz	QPSK	19150	1RB#24	23.18	24.65	PASS
Band2	10MHz	16QAM	19150	1RB#24	22.41	23.88	PASS
Band2	10MHz	QPSK	19150	1RB#49	22.62	24.09	PASS
Band2	10MHz	16QAM	19150	1RB#49	22.38	23.85	PASS
Band2	10MHz	QPSK	19150	25RB#0	22.78	24.25	PASS
Band2	10MHz	16QAM	19150	25RB#0	21.73	23.2	PASS
Band2	10MHz	QPSK	19150	25RB#12	22.84	24.31	PASS
Band2	10MHz	16QAM	19150	25RB#12	21.83	23.3	PASS
Band2	10MHz	QPSK	19150	25RB#25	22.63	24.1	PASS
Band2	10MHz	16QAM	19150	25RB#25	21.59	23.06	PASS
Band2	10MHz	QPSK	19150	50RB#0	22.66	24.13	PASS
Band2	15MHz	QPSK	18675	1RB#0	23.64	25.11	PASS

Band2	15MHz	16QAM	18675	1RB#0	22.74	24.21	PASS
Band2	15MHz	QPSK	18675	1RB#38	23.24	24.71	PASS
Band2	15MHz	16QAM	18675	1RB#38	22.33	23.8	PASS
Band2	15MHz	QPSK	18675	1RB#74	23.16	24.63	PASS
Band2	15MHz	16QAM	18675	1RB#74	22.39	23.86	PASS
Band2	15MHz	QPSK	18675	38RB#0	22.43	23.9	PASS
Band2	15MHz	QPSK	18675	38RB#18	22.73	24.2	PASS
Band2	15MHz	QPSK	18675	38RB#37	22.72	24.19	PASS
Band2	15MHz	QPSK	18675	75RB#0	22.73	24.2	PASS
Band2	15MHz	QPSK	18900	1RB#0	23.80	25.27	PASS
Band2	15MHz	16QAM	18900	1RB#0	22.47	23.94	PASS
Band2	15MHz	QPSK	18900	1RB#38	23.76	25.23	PASS
Band2	15MHz	16QAM	18900	1RB#38	22.44	23.91	PASS
Band2	15MHz	QPSK	18900	1RB#74	23.18	24.65	PASS
Band2	15MHz	16QAM	18900	1RB#74	22.14	23.61	PASS
Band2	15MHz	QPSK	18900	38RB#0	22.66	24.13	PASS
Band2	15MHz	QPSK	18900	38RB#18	22.89	24.36	PASS
Band2	15MHz	QPSK	18900	38RB#37	22.81	24.28	PASS
Band2	15MHz	QPSK	18900	75RB#0	22.85	24.32	PASS
Band2	15MHz	QPSK	19125	1RB#0	23.37	24.84	PASS
Band2	15MHz	16QAM	19125	1RB#0	22.52	23.99	PASS
Band2	15MHz	QPSK	19125	1RB#38	23.29	24.76	PASS
Band2	15MHz	16QAM	19125	1RB#38	22.45	23.92	PASS
Band2	15MHz	QPSK	19125	1RB#74	23.13	24.6	PASS
Band2	15MHz	16QAM	19125	1RB#74	22.35	23.82	PASS
Band2	15MHz	QPSK	19125	38RB#0	22.24	23.71	PASS
Band2	15MHz	QPSK	19125	38RB#18	22.46	23.93	PASS
Band2	15MHz	QPSK	19125	38RB#37	22.66	24.13	PASS
Band2	15MHz	QPSK	19125	75RB#0	22.60	24.07	PASS
Band2	20MHz	QPSK	18700	1RB#0	23.66	25.13	PASS
Band2	20MHz	16QAM	18700	1RB#0	22.80	24.27	PASS
Band2	20MHz	QPSK	18700	1RB#49	23.38	24.85	PASS
Band2	20MHz	16QAM	18700	1RB#49	22.15	23.62	PASS
Band2	20MHz	QPSK	18700	1RB#99	23.35	24.82	PASS
Band2	20MHz	16QAM	18700	1RB#99	22.58	24.05	PASS
Band2	20MHz	QPSK	18700	50RB#0	22.43	23.9	PASS
Band2	20MHz	QPSK	18700	50RB#25	22.65	24.12	PASS
Band2	20MHz	QPSK	18700	50RB#50	22.51	23.98	PASS
Band2	20MHz	QPSK	18700	100RB#0	22.65	24.12	PASS
Band2	20MHz	QPSK	18900	1RB#0	23.56	25.03	PASS
Band2	20MHz	16QAM	18900	1RB#0	22.61	24.08	PASS
Band2	20MHz	QPSK	18900	1RB#49	23.81	25.28	PASS
Band2	20MHz	16QAM	18900	1RB#49	22.64	24.11	PASS

Band2	20MHz	QPSK	18900	1RB#99	23.31	24.78	PASS
Band2	20MHz	16QAM	18900	1RB#99	22.29	23.76	PASS
Band2	20MHz	QPSK	18900	50RB#0	22.65	24.12	PASS
Band2	20MHz	QPSK	18900	50RB#25	22.94	24.41	PASS
Band2	20MHz	QPSK	18900	50RB#50	22.75	24.22	PASS
Band2	20MHz	QPSK	18900	100RB#0	22.83	24.3	PASS
Band2	20MHz	QPSK	19100	1RB#0	23.34	24.81	PASS
Band2	20MHz	16QAM	19100	1RB#0	22.55	24.02	PASS
Band2	20MHz	QPSK	19100	1RB#49	23.35	24.82	PASS
Band2	20MHz	16QAM	19100	1RB#49	22.13	23.6	PASS
Band2	20MHz	QPSK	19100	1RB#99	23.11	24.58	PASS
Band2	20MHz	16QAM	19100	1RB#99	22.37	23.84	PASS
Band2	20MHz	QPSK	19100	50RB#0	22.22	23.69	PASS
Band2	20MHz	QPSK	19100	50RB#25	22.39	23.86	PASS
Band2	20MHz	QPSK	19100	50RB#50	22.69	24.16	PASS
Band2	20MHz	QPSK	19100	100RB#0	22.57	24.04	PASS

Appendix B: Peak-to-Average Ratio(CCDF)

Test Result


Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dB)	Limit(dB)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	5.13	13	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	6.17	13	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	5.59	13	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	6.38	13	PASS
Band2	1.4MHz	QPSK	18900	1RB#0	5.36	13	PASS
Band2	1.4MHz	16QAM	18900	1RB#0	6.38	13	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	5.62	13	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	6.32	13	PASS
Band2	1.4MHz	QPSK	19193	1RB#0	5.28	13	PASS
Band2	1.4MHz	16QAM	19193	1RB#0	5.86	13	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	8.46	13	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	7.19	13	PASS
Band2	3MHz	QPSK	18615	1RB#0	5.42	13	PASS
Band2	3MHz	16QAM	18615	1RB#0	6.23	13	PASS
Band2	3MHz	QPSK	18615	15RB#0	5.54	13	PASS
Band2	3MHz	16QAM	18615	15RB#0	6.29	13	PASS
Band2	3MHz	QPSK	18900	1RB#0	5.48	13	PASS
Band2	3MHz	16QAM	18900	1RB#0	6.03	13	PASS
Band2	3MHz	QPSK	18900	15RB#0	5.65	13	PASS
Band2	3MHz	16QAM	18900	15RB#0	6.46	13	PASS
Band2	3MHz	QPSK	19185	1RB#0	5.07	13	PASS
Band2	3MHz	16QAM	19185	1RB#0	6.06	13	PASS

Band2	3MHz	QPSK	19185	15RB#0	5.45	13	PASS
Band2	3MHz	16QAM	19185	15RB#0	6.23	13	PASS
Band2	5MHz	QPSK	18625	1RB#0	5.25	13	PASS
Band2	5MHz	16QAM	18625	1RB#0	6.09	13	PASS
Band2	5MHz	QPSK	18625	25RB#0	5.51	13	PASS
Band2	5MHz	16QAM	18625	25RB#0	6.17	13	PASS
Band2	5MHz	QPSK	18900	1RB#0	5.04	13	PASS
Band2	5MHz	16QAM	18900	1RB#0	6.23	13	PASS
Band2	5MHz	QPSK	18900	25RB#0	5.51	13	PASS
Band2	5MHz	16QAM	18900	25RB#0	6.32	13	PASS
Band2	5MHz	QPSK	19175	1RB#0	5.10	13	PASS
Band2	5MHz	16QAM	19175	1RB#0	5.91	13	PASS
Band2	5MHz	QPSK	19175	25RB#0	5.48	13	PASS
Band2	5MHz	16QAM	19175	25RB#0	6.09	13	PASS
Band2	10MHz	QPSK	18650	1RB#0	5.10	13	PASS
Band2	10MHz	16QAM	18650	1RB#0	6.09	13	PASS
Band2	10MHz	QPSK	18650	50RB#0	5.45	13	PASS
Band2	10MHz	QPSK	18900	1RB#0	5.22	13	PASS
Band2	10MHz	16QAM	18900	1RB#0	6.17	13	PASS
Band2	10MHz	QPSK	18900	50RB#0	5.45	13	PASS
Band2	10MHz	QPSK	19150	1RB#0	5.22	13	PASS
Band2	10MHz	16QAM	19150	1RB#0	6.20	13	PASS
Band2	10MHz	QPSK	19150	50RB#0	5.36	13	PASS
Band2	15MHz	QPSK	18675	1RB#0	5.13	13	PASS
Band2	15MHz	16QAM	18675	1RB#0	6.09	13	PASS
Band2	15MHz	QPSK	18675	75RB#0	5.80	13	PASS
Band2	15MHz	QPSK	18900	1RB#0	5.54	13	PASS
Band2	15MHz	16QAM	18900	1RB#0	6.32	13	PASS
Band2	15MHz	QPSK	18900	75RB#0	5.74	13	PASS
Band2	15MHz	QPSK	19125	1RB#0	5.25	13	PASS
Band2	15MHz	16QAM	19125	1RB#0	6.23	13	PASS
Band2	15MHz	QPSK	19125	75RB#0	5.71	13	PASS
Band2	15MHz	16QAM	19125	75RB#0	8.46	13	PASS
Band2	20MHz	QPSK	18700	1RB#0	5.36	13	PASS
Band2	20MHz	16QAM	18700	1RB#0	5.88	13	PASS
Band2	20MHz	QPSK	18700	100RB#0	5.51	13	PASS
Band2	20MHz	QPSK	18900	1RB#0	5.74	13	PASS
Band2	20MHz	16QAM	18900	1RB#0	6.20	13	PASS
Band2	20MHz	QPSK	18900	100RB#0	5.39	13	PASS
Band2	20MHz	QPSK	19100	1RB#0	5.68	13	PASS
Band2	20MHz	16QAM	19100	1RB#0	6.12	13	PASS
Band2	20MHz	QPSK	19100	100RB#0	5.45	13	PASS


Test Graphs




Band2-1.4MHz-QPSK-18607-1RB#0-PASS

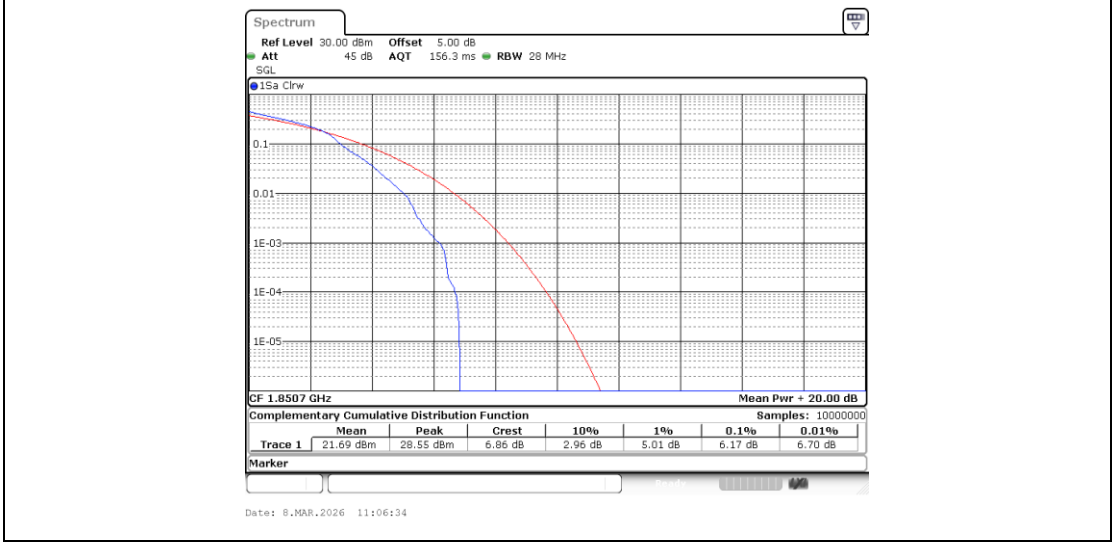


Band2-1.4MHz-16QAM-18607-1RB#0-PASS

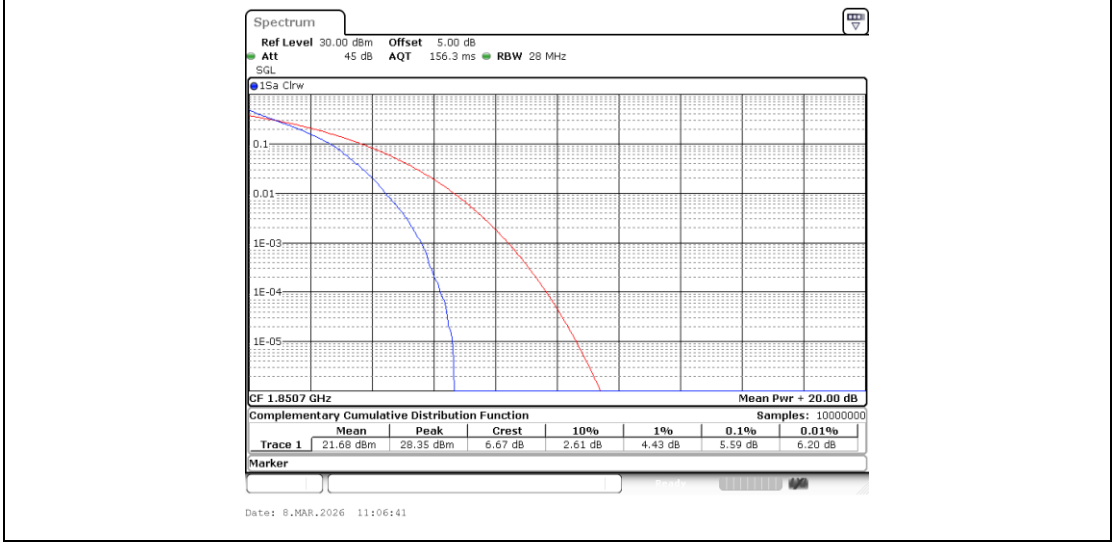


Band2-1.4MHz-QPSK-18607-6RB#0-PASS

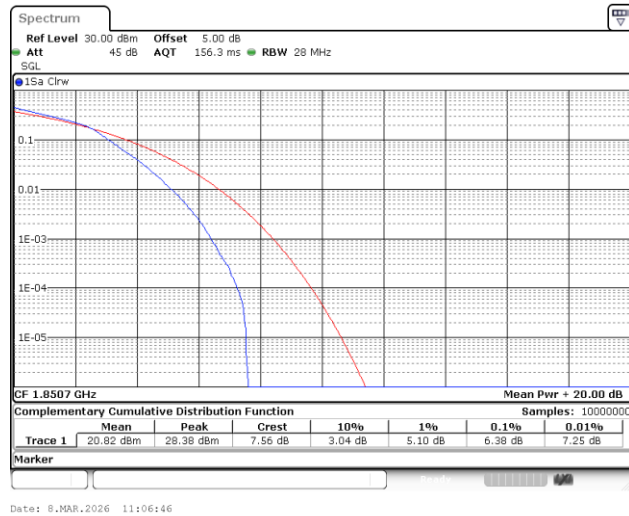


Band2-1.4MHz-16QAM-18607-6RB#0-PASS

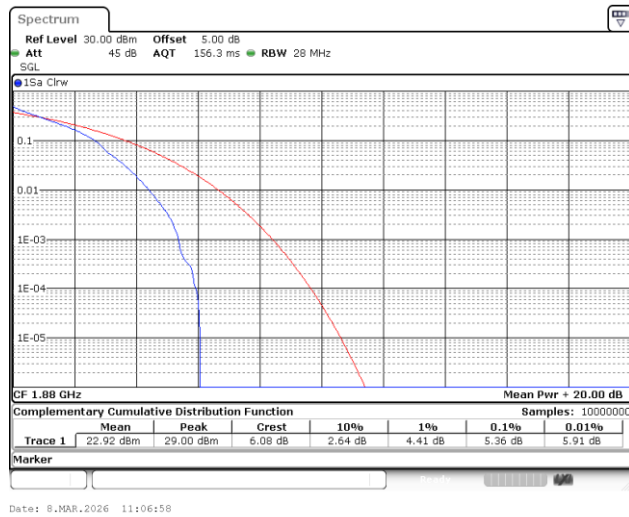


Band2-1.4MHz-QPSK-18900-1RB#0-PASS

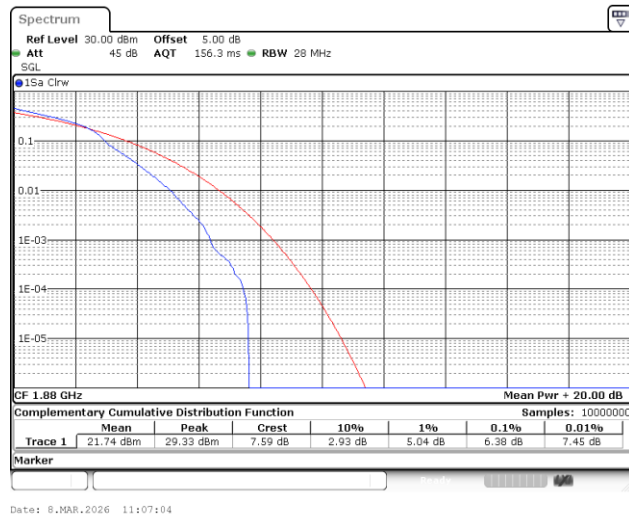


Band2-1.4MHz-16QAM-18900-1RB#0-PASS

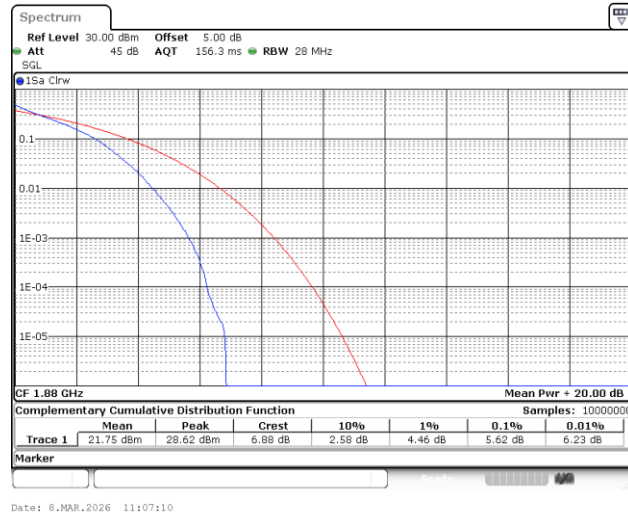


Band2-1.4MHz-QPSK-18900-6RB#0-PASS

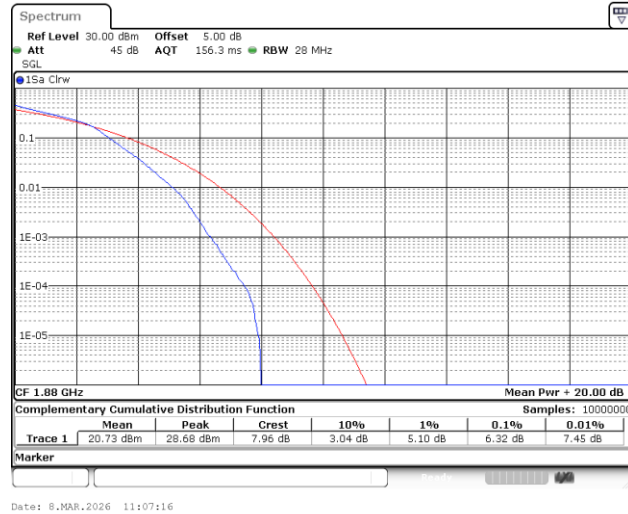


Band2-1.4MHz-16QAM-18900-6RB#0-PASS

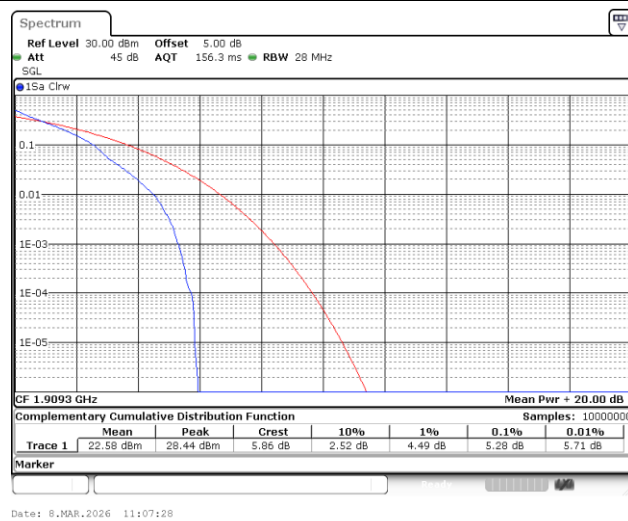


Band2-1.4MHz-QPSK-19193-1RB#0-PASS

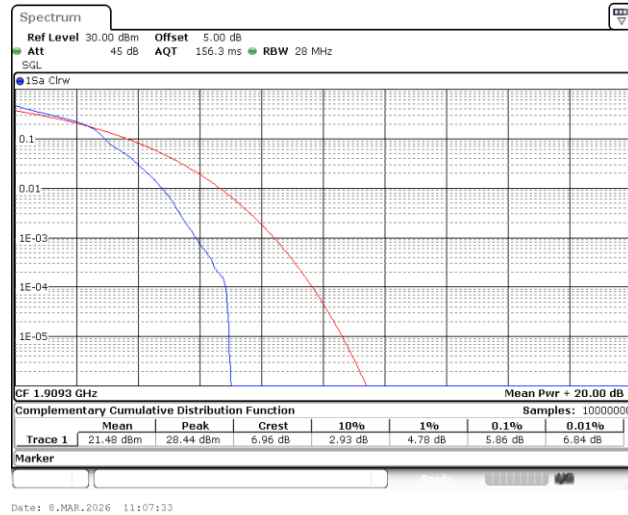


Band2-1.4MHz-16QAM-19193-1RB#0-PASS

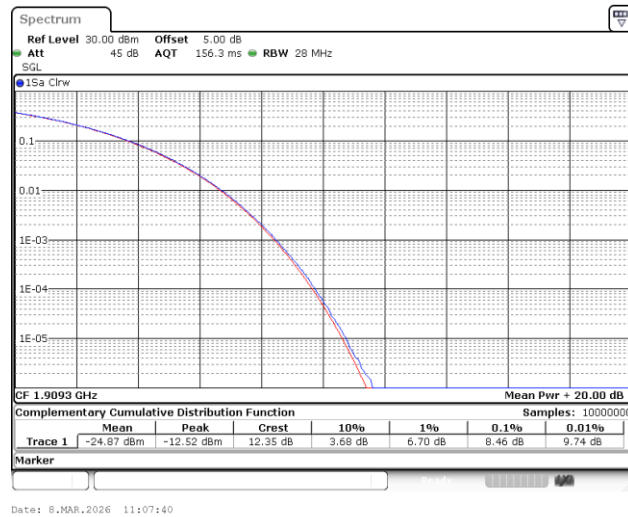


Band2-1.4MHz-QPSK-19193-6RB#0-PASS

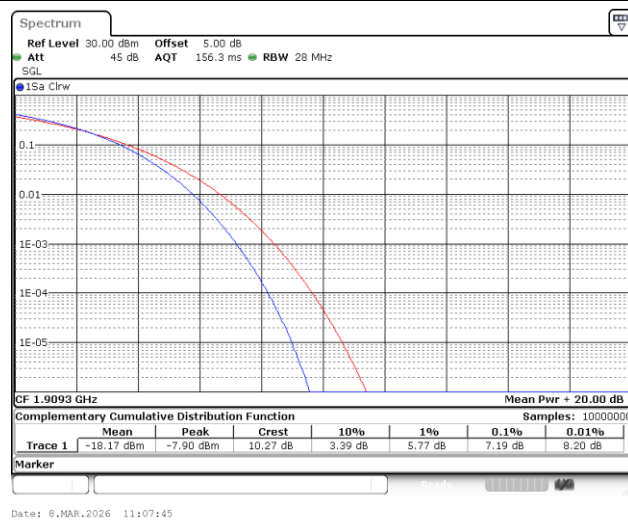


Band2-1.4MHz-16QAM-19193-6RB#0-PASS

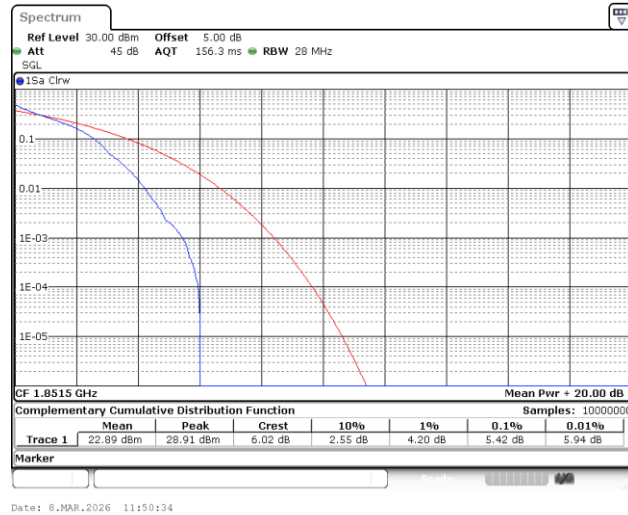


Band2-3MHz-QPSK-18615-1RB#0-PASS

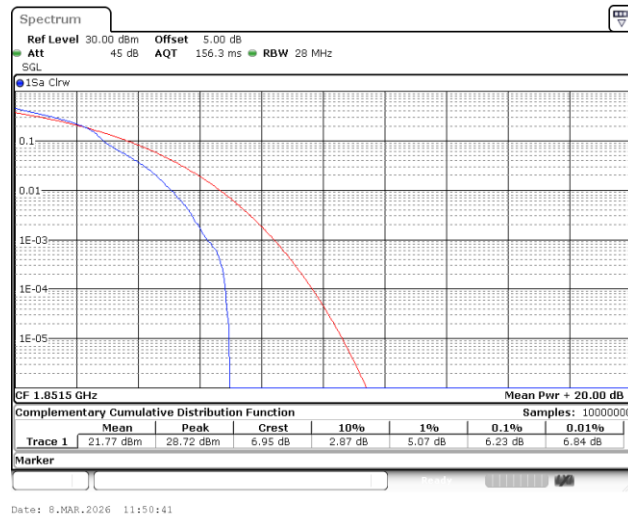


Band2-3MHz-16QAM-18615-1RB#0-PASS

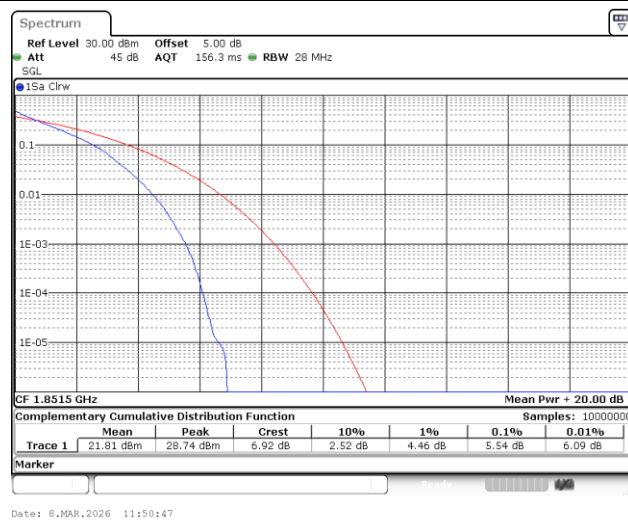


Band2-3MHz-QPSK-18615-15RB#0-PASS

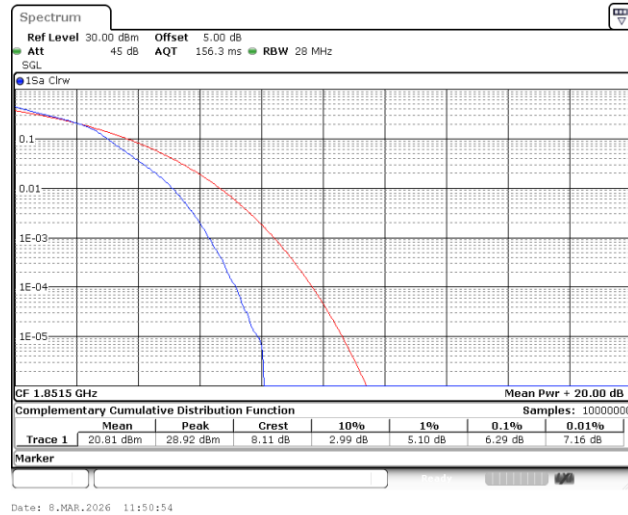


Band2-3MHz-16QAM-18615-15RB#0-PASS

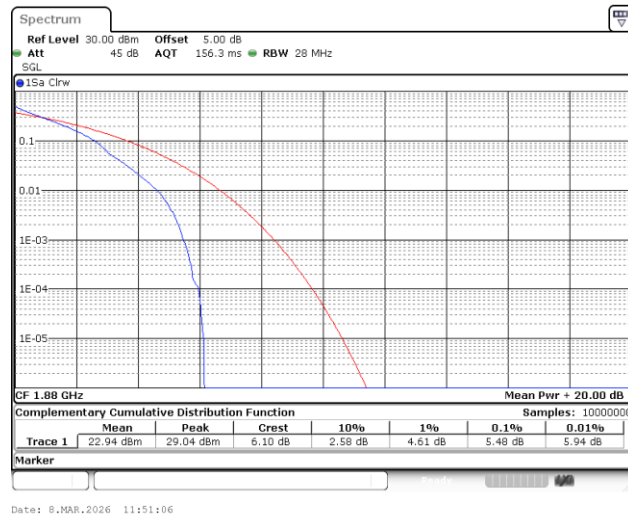


Band2-3MHz-QPSK-18900-1RB#0-PASS

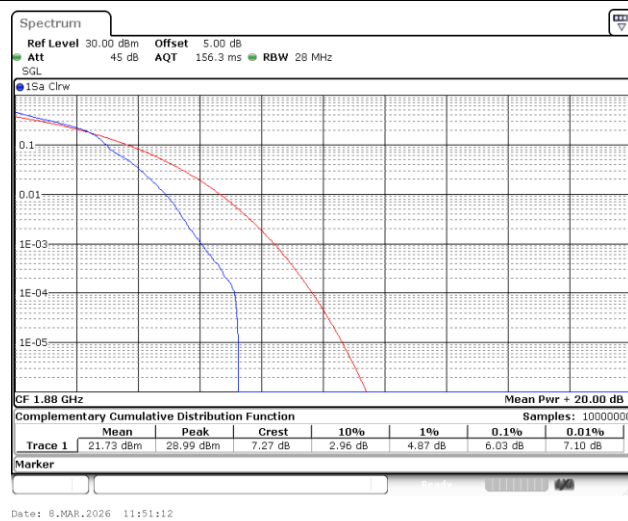


Band2-3MHz-16QAM-18900-1RB#0-PASS

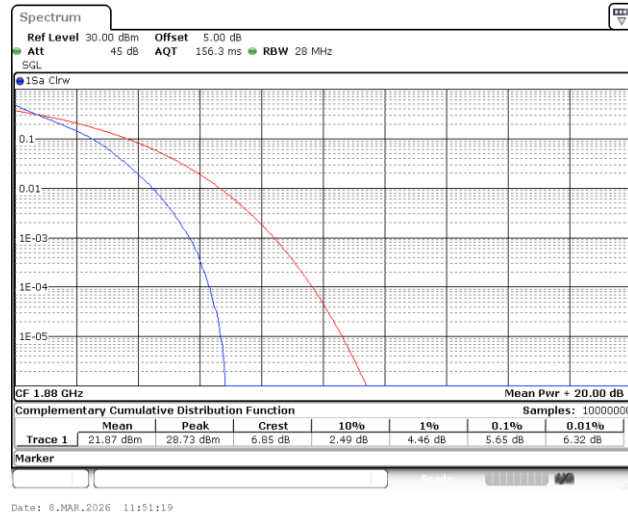


Band2-3MHz-QPSK-18900-15RB#0-PASS

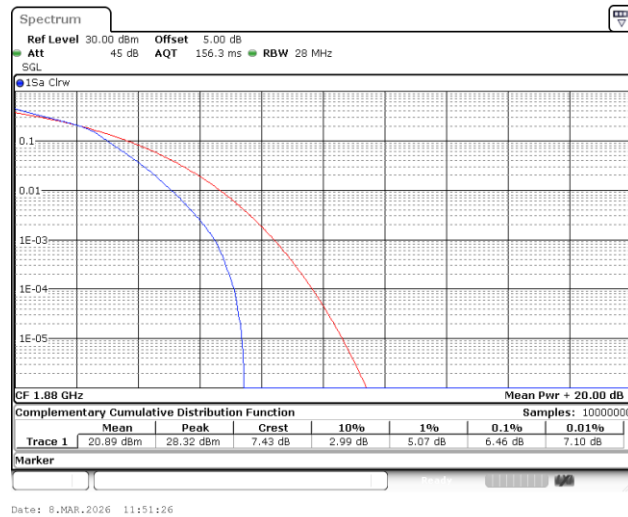


Band2-3MHz-16QAM-18900-15RB#0-PASS

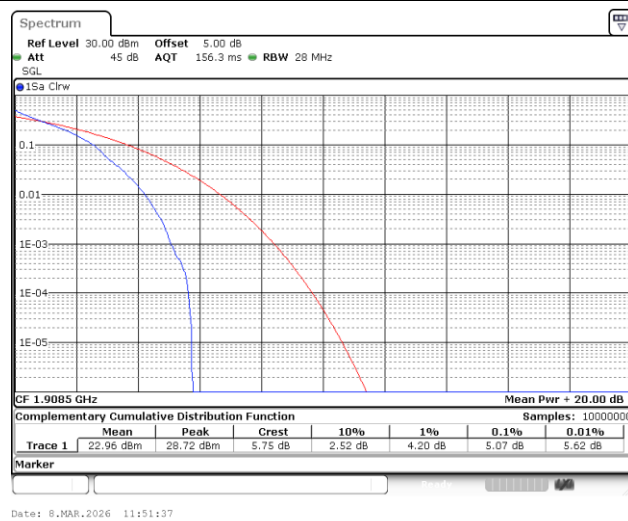


Band2-3MHz-QPSK-19185-1RB#0-PASS

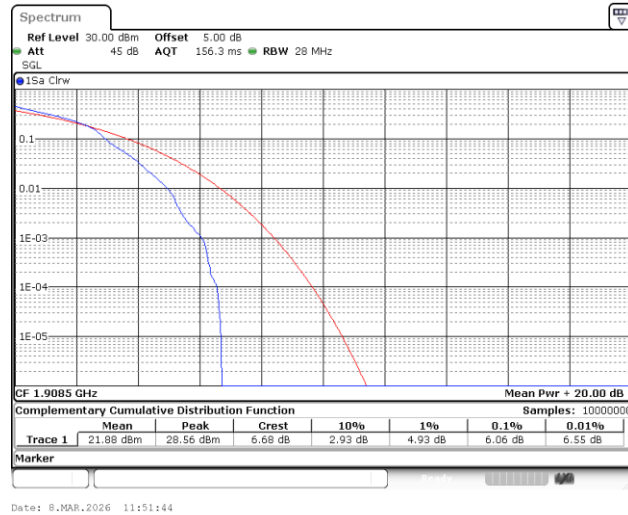


Band2-3MHz-16QAM-19185-1RB#0-PASS

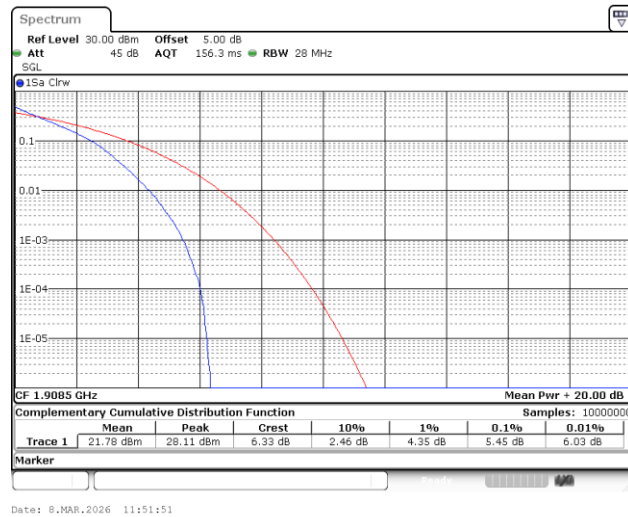


Band2-3MHz-QPSK-19185-15RB#0-PASS

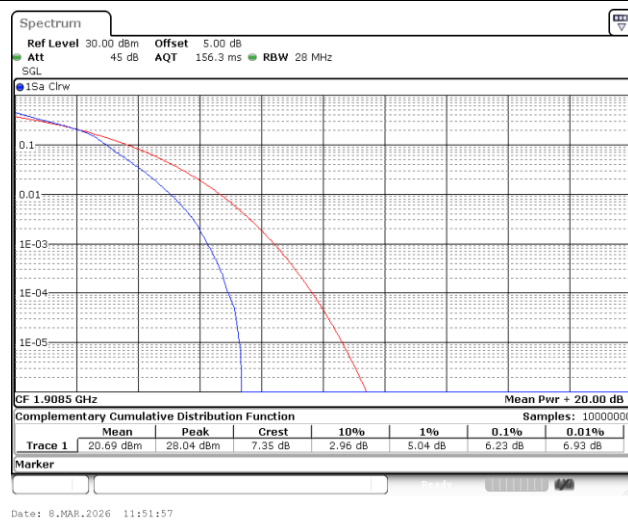


Band2-3MHz-16QAM-19185-15RB#0-PASS

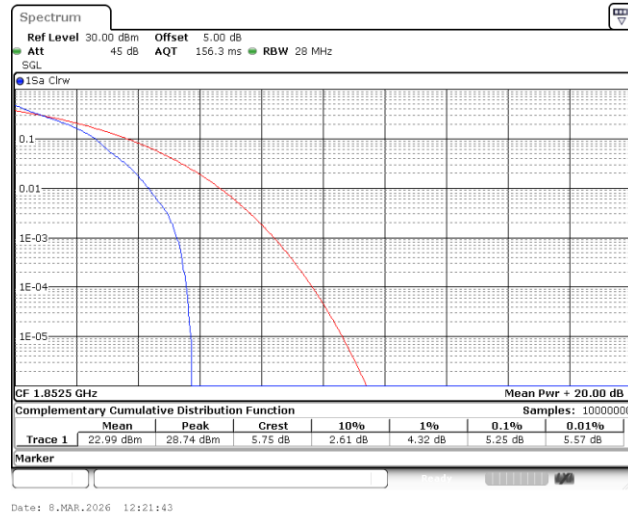


Band2-5MHz-QPSK-18625-1RB#0-PASS

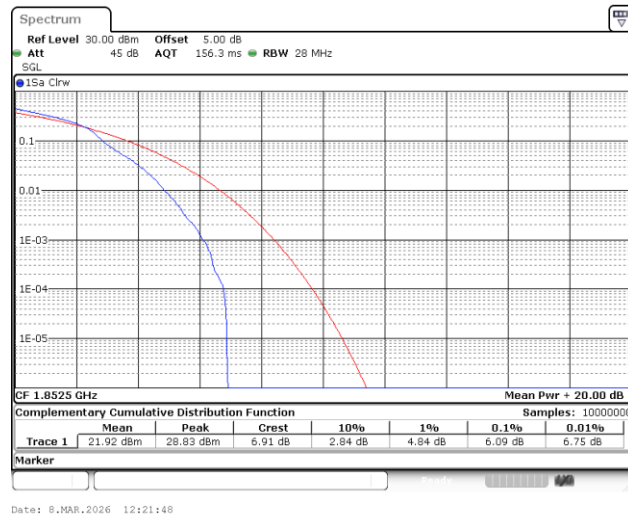


Band2-5MHz-16QAM-18625-1RB#0-PASS

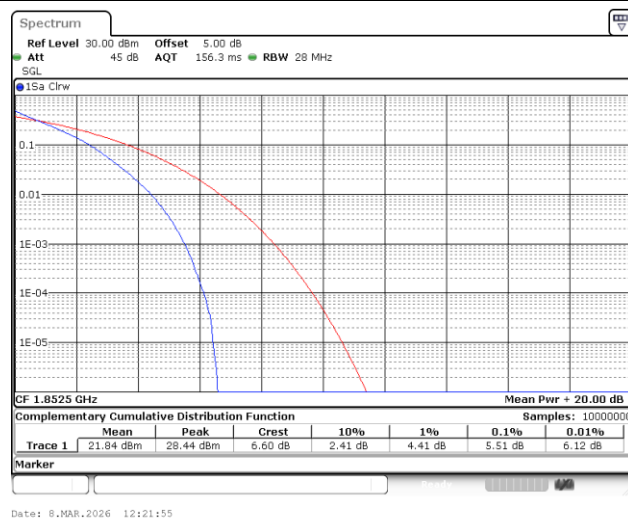


Band2-5MHz-QPSK-18625-25RB#0-PASS

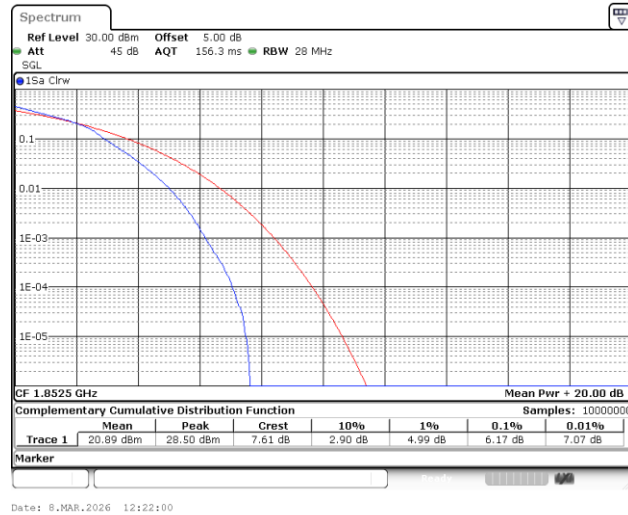


Band2-5MHz-16QAM-18625-25RB#0-PASS

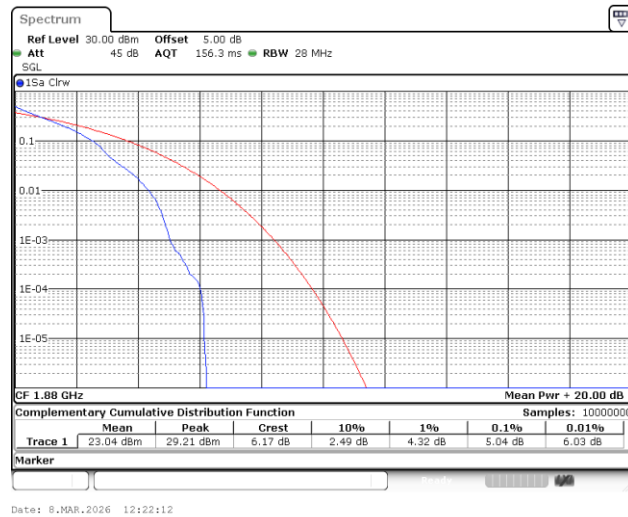


Band2-5MHz-QPSK-18900-1RB#0-PASS

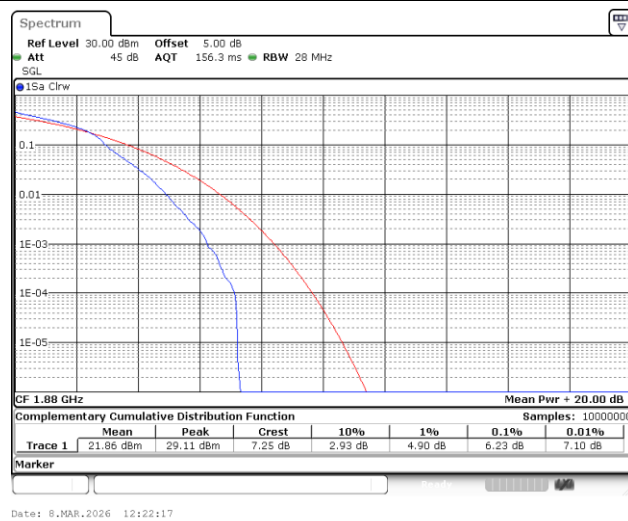


Band2-5MHz-16QAM-18900-1RB#0-PASS

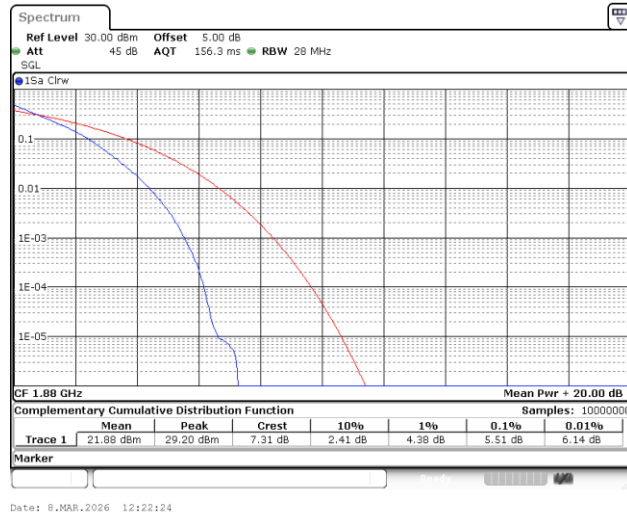


Band2-5MHz-QPSK-18900-25RB#0-PASS

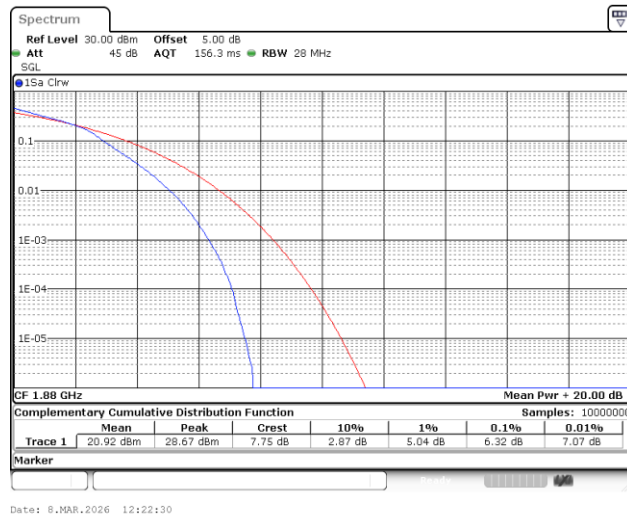


Band2-5MHz-16QAM-18900-25RB#0-PASS

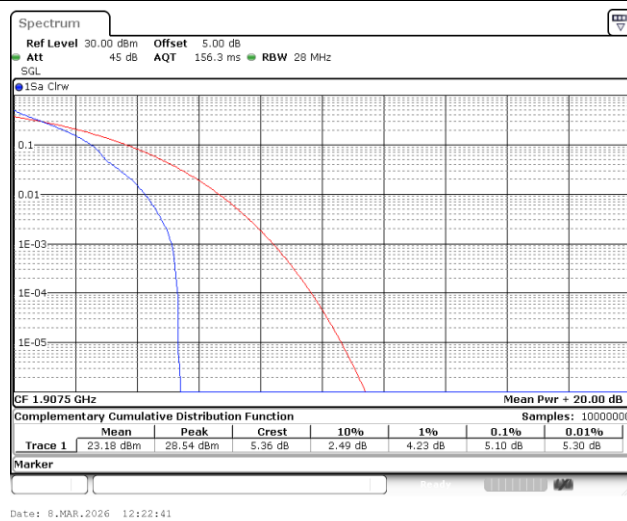


Band2-5MHz-QPSK-19175-1RB#0-PASS

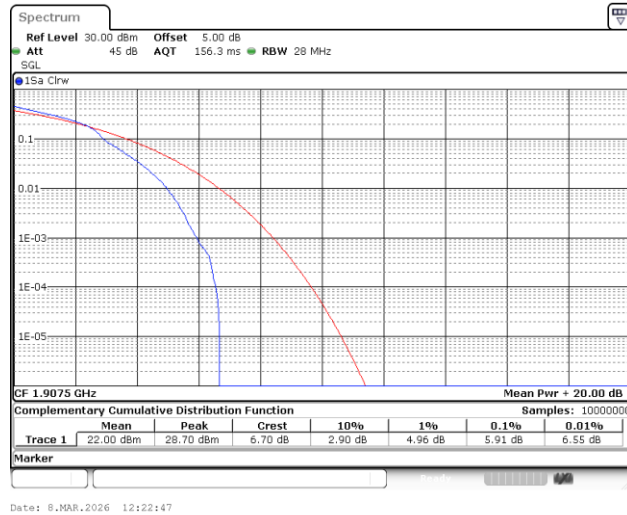


Band2-5MHz-16QAM-19175-1RB#0-PASS

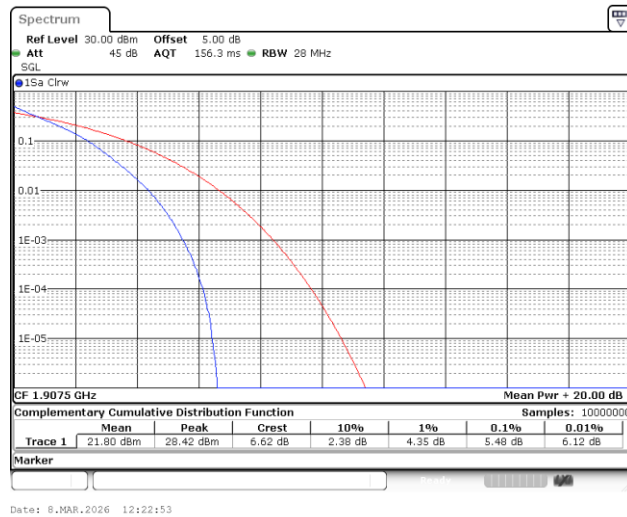


Band2-5MHz-QPSK-19175-25RB#0-PASS

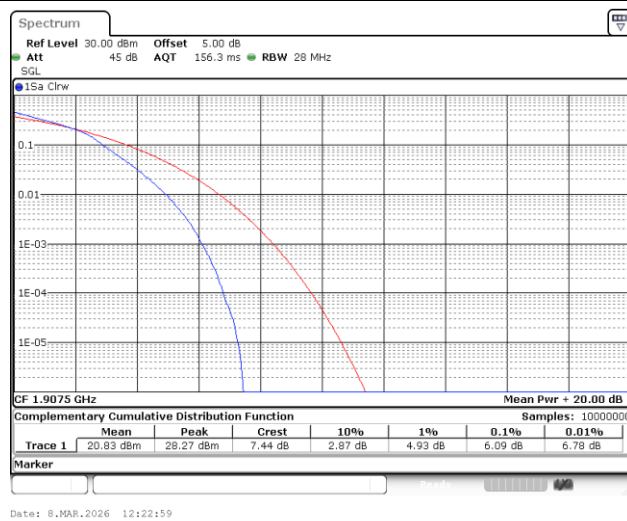


Band2-5MHz-16QAM-19175-25RB#0-PASS

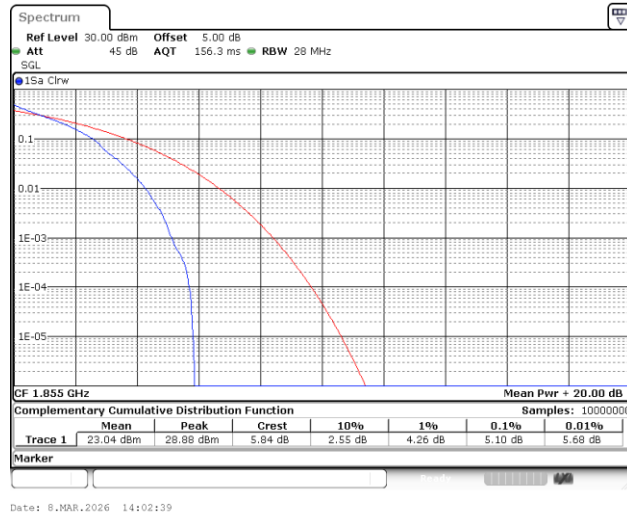


Band2-10MHz-QPSK-18650-1RB#0-PASS

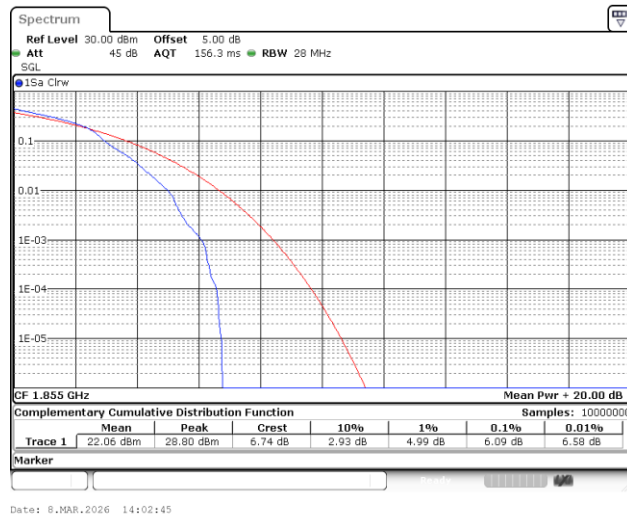


Band2-10MHz-16QAM-18650-1RB#0-PASS

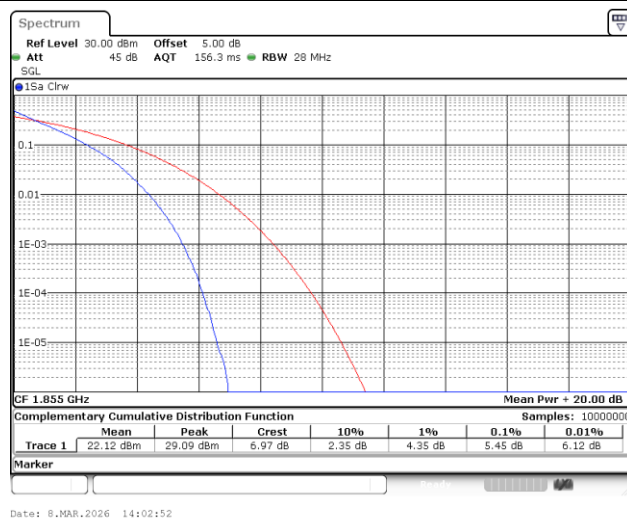


Band2-10MHz-QPSK-18650-50RB#0-PASS

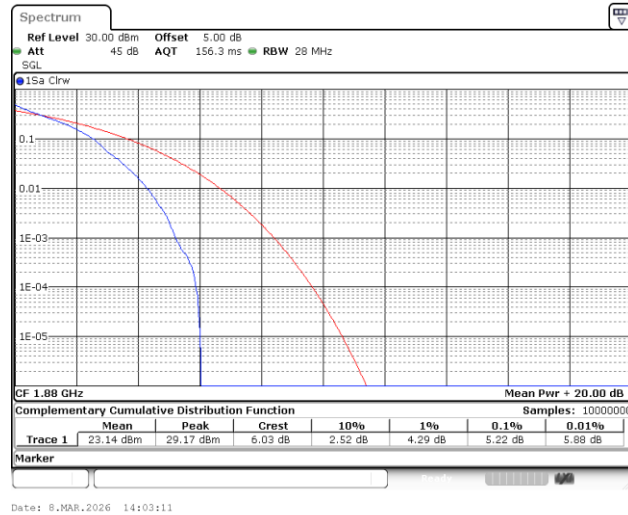


Band2-10MHz-QPSK-18900-1RB#0-PASS

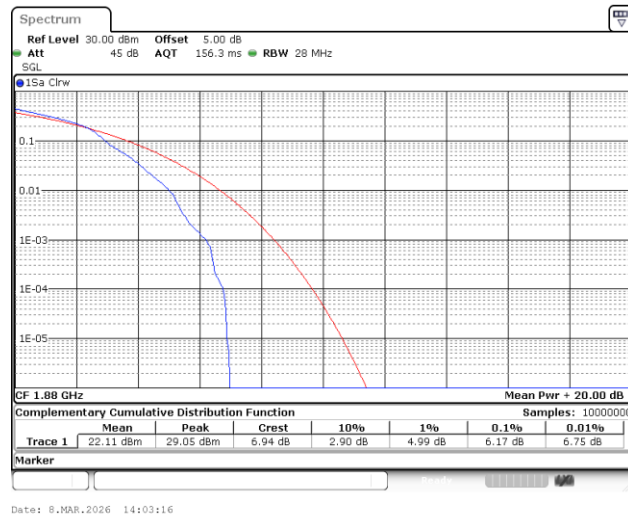


Band2-10MHz-16QAM-18900-1RB#0-PASS

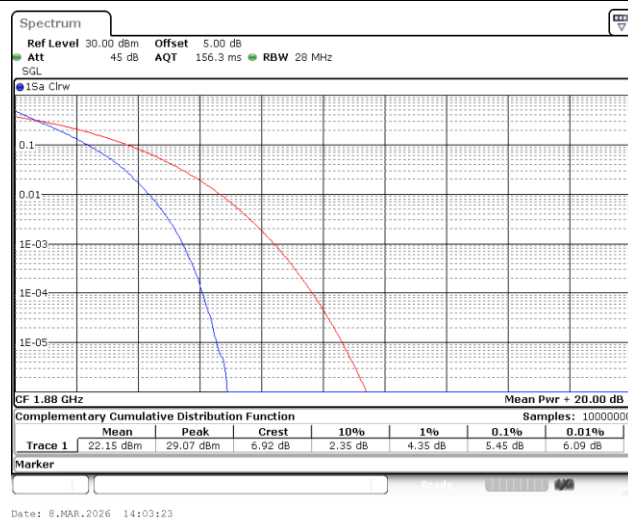


Band2-10MHz-QPSK-18900-50RB#0-PASS

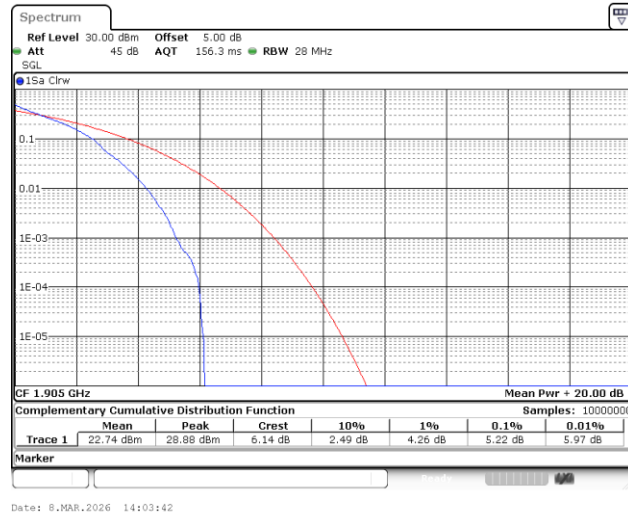


Band2-10MHz-QPSK-19150-1RB#0-PASS

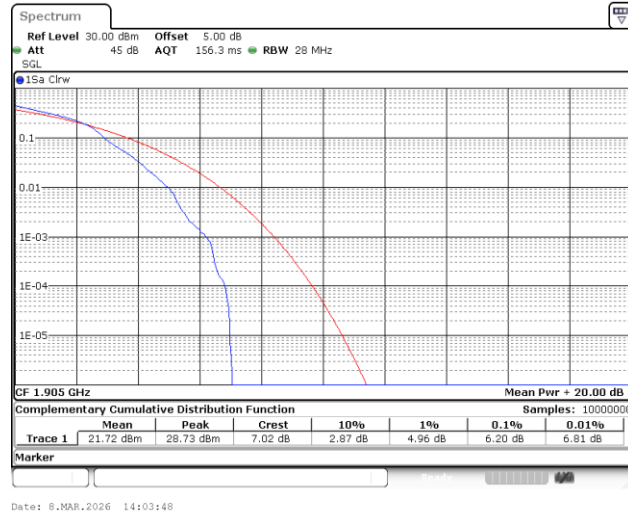


Band2-10MHz-16QAM-19150-1RB#0-PASS

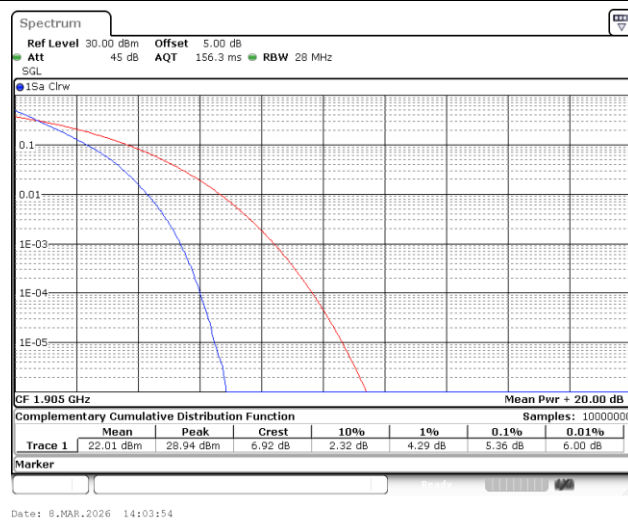


Band2-10MHz-QPSK-19150-50RB#0-PASS

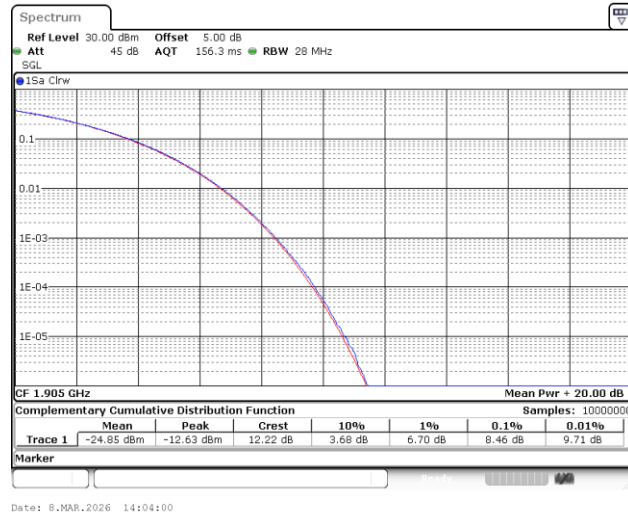

Band2-15MHz-QPSK-18675-1RB#0-PASS

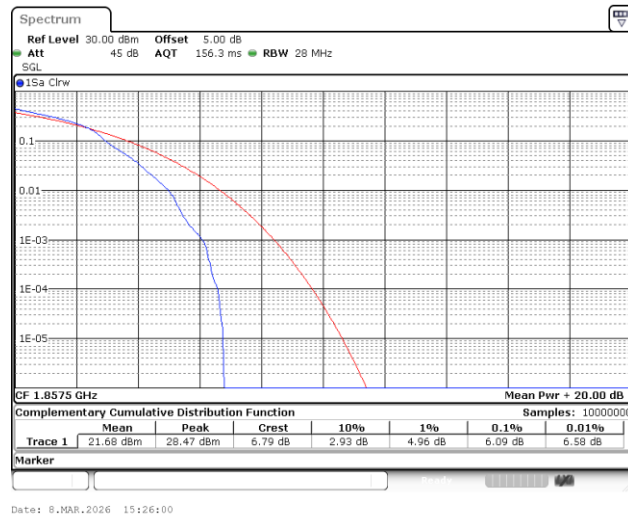

Band2-15MHz-16QAM-18675-1RB#0-PASS

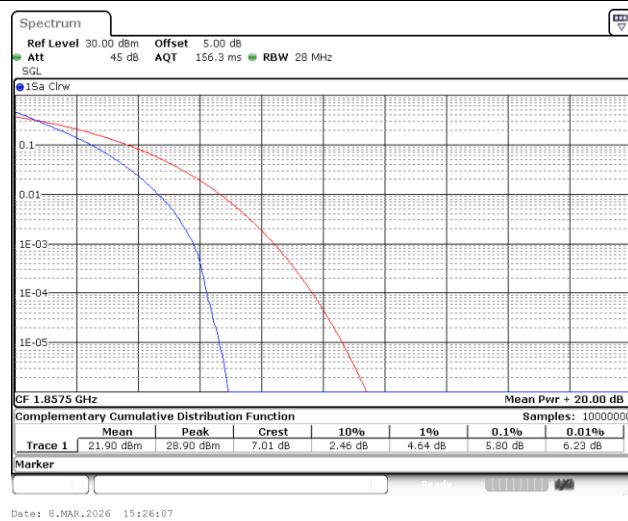

Band2-15MHz-QPSK-18675-75RB#0-PASS