Testing Laboratory 3787

DFS TEST REPORT

FCC ID	:	TX2-RTL8852CE
Equipment	:	11ax RTL8852CE Combo module
Brand Name	:	REALTEK
Model Name	:	RTL8852CE
Applicant	:	Realtek Semiconductor Corp. No. 2,Innovation Road II, Hsinchu Science Park, Hsinchu 300,Taiwan
Manufacturer	:	Realtek Semiconductor Corp. No. 2,Innovation Road II, Hsinchu Science Park, Hsinchu 300,Taiwan
Standard	:	47 CFR FCC Part 15.407

The product was received on Nov. 05, 2021, and testing was started from Dec. 29, 2021 and completed on May 21, 2022. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory
No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan

Table of Contents

History of this test report **3**

Summary of Test Result **4**

1 General Description **5**

1.1 Information 5
1.2 Accessories 14
1.3 Support Equipment 14
1.4 Applicable Standards 14
1.5 Testing Location Information 14

2 Test Configuration of EUT **15**

2.1 Test Channel Frequencies Configuration 15
2.2 The Worst Case Measurement Configuration 15

3 Dynamic Frequency Selection (DFS) Test Result **16**

3.1 General DFS Information 16
3.2 Radar Test Waveform Calibration 19
3.3 In-service Monitoring 28

4 Test Equipment and Calibration Data **37**

5 Measurement Uncertainty **38**

Appendix A. Test Photos

Photographs of EUT v01

History of this test report

Report No.	Version	Description	Issued Date
FZ1N0223	01	Initial issue of report	Jul. 18, 2022
FZ1N0223	02	Revising the Laboratory address.	Sep. 06, 2022
FZ1N0223	03	Revising Antenna Information	Nov. 07, 2022

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.3	FCC KDB 905462 7.8.3	DFS: In-Service Monitoring for Channel Move Time (CMT)	PASS	-
3.3	FCC KDB 905462 7.8.3	DFS: In-Service Monitoring for Channel Closing Transmission Time (CCTT)	PASS	-
3.3	FCC KDB 905462 7.8.3	DFS: In-Service Monitoring for Non-Occupancy Period (NOP)	PASS	-
Note: Since the product is client without radar detection function, only Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period are required to perform.				

Declaration of Conformity:

1. The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to report "Measurement Uncertainty".

Comments and Explanations:

1. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.
2. The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chens

Report Producer: Sandy Chuang

1 General Description

1.1 Information

1.1.1 RF General Information

Specification Items	Description	
Frequency Range	5250 MHz – 5350 MHz 5470 MHz – 5725 MHz	
Power Type	From host system	
Channel Bandwidth	20/40/80/160 MHz operating channel bandwidth	
Operating Mode	☐ Master	
	☐ Client with radar detection	
	☒ Client without radar detection	
Communication Mode	☒ IP Based (Load Based)	☐ Frame Based
TPC Function	☒ With TPC	☐ Without TPC
Weather Band (5600~5650MHz)	☒ With 5600~5650MHz	☐ Without 5600~5650MHz
Power-on cycle	NA (No Channel Availability Check Function)	
Firmware Number	6001.0.16.101	
◆ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation. ◆ VHT20, VHT40, VHT80 and VHT160 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation. ◆ HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation ◆ EUT employ a TPC mechanism and TPC have the capability to operate at least 6 dB below highest RF output power.		

Note: The above information was declared by manufacturer.

TPC Power Result
<Full RU>
Non-Beamforming Mode:
1TX

Mode	Min Power (dBm)	Max Power (dBm)	Min EIRP (dBm)	Max EIRP (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-
5.25-5.35GHz	15.63	21.63	20.63	26.63
5.47-5.725GHz	15.71	21.71	20.71	26.71
802.11ac VHT20_Nss1,(MCS0)_1TX	-	-	-	-
5.25-5.35GHz	15.43	21.43	20.43	26.43
5.47-5.725GHz	15.67	21.67	20.67	26.67
802.11ac VHT40_Nss1,(MCS0)_1TX	-	-	-	-
5.25-5.35GHz	14.14	20.14	19.14	25.14
5.47-5.725GHz	15.28	21.28	20.28	26.28
802.11ac VHT80_Nss1,(MCS0)_1TX	-	-	-	-
5.25-5.35GHz	8.11	14.11	13.11	19.11
5.47-5.725GHz	14.34	20.34	19.34	25.34
802.11ac VHT160_Nss1,(MCS0)_1TX	-	-	-	-
5.25-5.35GHz	2.46	8.46	7.46	13.46
5.47-5.725GHz	6.13	12.13	11.13	17.13
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5.25-5.35GHz	15.47	21.47	20.47	26.47
5.47-5.725GHz	15.75	21.75	20.75	26.75
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-
5.25-5.35GHz	14.17	20.17	19.17	25.17
5.47-5.725GHz	15.45	21.45	20.45	26.45
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-
5.25-5.35GHz	8.16	14.16	13.16	19.16
5.47-5.725GHz	14.35	20.35	19.35	25.35
802.11ax HEW160_Nss1,(MCS0)_1TX	-	-	-	-
5.25-5.35GHz	2.53	8.53	7.53	13.53
5.47-5.725GHz	6.21	12.21	11.21	17.21

2TX

Mode	Min Power (dBm)	Max Power (dBm)	Min EIRP (dBm)	Max EIRP (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-
5.25-5.35GHz	14.13	20.13	19.13	25.13
5.47-5.725GHz	13.96	19.96	18.96	24.96
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-	-	-
5.25-5.35GHz	14.08	20.08	19.08	25.08
5.47-5.725GHz	14.16	20.16	19.16	25.16
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-
5.25-5.35GHz	16.60	22.60	21.60	27.60
5.47-5.725GHz	17.15	23.15	22.15	28.15
802.11ac VHT80_Nss1,(MCS0)_2TX	-	-	-	-
5.25-5.35GHz	8.05	14.05	13.05	19.05
5.47-5.725GHz	14.43	20.43	19.43	25.43
802.11ac VHT160_Nss1,(MCS0)_2TX	-	-	-	-
5.25-5.35GHz	3.39	9.39	8.39	14.39
5.47-5.725GHz	7.12	13.12	12.12	18.12
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-
5.25-5.35GHz	14.42	20.42	19.42	25.42
5.47-5.725GHz	14.27	20.27	19.27	25.27
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-
5.25-5.35GHz	16.76	22.76	21.76	27.76
5.47-5.725GHz	17.18	23.18	22.18	28.18
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-
5.25-5.35GHz	8.23	14.23	13.23	19.23
5.47-5.725GHz	14.73	20.73	19.73	25.73
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-
5.25-5.35GHz	3.81	9.81	8.81	14.81
5.47-5.725GHz	7.29	13.29	12.29	18.29

Beamforming Mode:

2TX

Mode	Min Power (dBm)	Max Power (dBm)	Min EIRP (dBm)	Max EIRP (dBm)
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-
5.25-5.35GHz	14.08	20.08	22.09	28.09
5.47-5.725GHz	14.16	20.16	22.17	28.17
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-
5.25-5.35GHz	15.75	21.75	23.76	29.76
5.47-5.725GHz	15.83	21.83	23.84	29.84
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-
5.25-5.35GHz	8.05	14.05	16.06	22.06
5.47-5.725GHz	14.43	20.43	22.44	28.44
802.11ac VHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-
5.25-5.35GHz	3.39	9.39	11.40	17.40
5.47-5.725GHz	7.12	13.12	15.13	21.13
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-
5.25-5.35GHz	14.42	20.42	22.43	28.43
5.47-5.725GHz	14.27	20.27	22.28	28.28
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-	-	-	-
5.25-5.35GHz	15.79	21.79	23.80	29.80
5.47-5.725GHz	15.90	21.90	23.91	29.91
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	-	-	-	-
5.25-5.35GHz	8.23	14.23	16.24	22.24
5.47-5.725GHz	14.73	20.73	22.74	28.74
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	-	-	-	-
5.25-5.35GHz	3.81	9.81	11.82	17.82
5.47-5.725GHz	7.29	13.29	15.30	21.30

<Partial RU>

RU 26

1TX

Mode	Min Power (dBm)	Max Power (dBm)	Min EIRP (dBm)	Max EIRP (dBm)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5.25-5.35GHz	8.61	14.61	13.61	19.61
5.47-5.725GHz	8.90	14.90	13.90	19.90

2TX

Mode	Min Power (dBm)	Max Power (dBm)	Min EIRP (dBm)	Max EIRP (dBm)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-
5.25-5.35GHz	6.35	12.35	11.35	17.35
5.47-5.725GHz	7.10	13.10	12.10	18.10

RU 52

1TX

Mode	Min Power (dBm)	Max Power (dBm)	Min EIRP (dBm)	Max EIRP (dBm)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5.25-5.35GHz	11.38	17.38	16.38	22.38
5.47-5.725GHz	12.05	18.05	17.05	23.05

2TX

Mode	Min Power (dBm)	Max Power (dBm)	Min EIRP (dBm)	Max EIRP (dBm)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-
5.25-5.35GHz	9.74	15.74	14.74	20.74
5.47-5.725GHz	9.97	15.97	14.97	20.97

RU 106

1TX

Mode	Min Power (dBm)	Max Power (dBm)	Min EIRP (dBm)	Max EIRP (dBm)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5.25-5.35GHz	12.86	18.86	17.86	23.86
5.47-5.725GHz	13.36	19.36	18.36	24.36

2TX

Mode	Min Power (dBm)	Max Power (dBm)	Min EIRP (dBm)	Max EIRP (dBm)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-
5.25-5.35GHz	11.20	17.20	16.20	22.20
5.47-5.725GHz	11.59	17.59	16.59	22.59

1.1.2 Antenna Information

Ant.	Port			Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	WLAN 2.4GHz	WLAN 5GHz / 6GHz	Bluetooth					
1	1/2	1/2	1	ARISTOTLE	RFA-27-JP378-4B-200	Monopole	I-PEX	Note 1
2	1/2	1/2	1	ARISTOTLE	RFA-27-JP326-MHF4300	PIFA	I-PEX	
3	1/2	1/2	1	ARISTOTLE	RFA-27-C38H1-MHF4300	Dipole	I-PEX	
4	-	1/2	-	ARISTOTLE	RFA-57-JP697-4B-300	Monopole	I-PEX	

Note 1

Ant.	Port			Gain (dBi)		
	WLAN 2.4GHz	WLAN 5GHz / 6GHz	Bluetooth	WLAN 2.4GHz	WLAN 5GHz / 6GHz	Bluetooth
1	1/2	1/2	1	3.38	4.86	3.38
2	1/2	1/2	1	3.50	5.00	3.50
3	1/2	1/2	1	3.00	5.00	3.00
4	-	1/2	-	-	-5	-

Note 2: The above information was declared by manufacturer.

<For WLAN 2.4GHz function>
For IEEE 802.11b/g/n/VHT/ax (1TX/2RX):
For Conducted:
The EUT supports the antenna with TX diversity functions.
Both Port 1 and Port 2 support transmit and receive functions, but only one of them will be used at one time.
The Port 1 generated the worst case, so it was selected to test and record in the report.
Port 1 and Port 2 could receive simultaneously
For Radiated:
The EUT supports the antenna with TX diversity functions.
Both Port 1 and Port 2 support transmit and receive functions, but only one of them will be used at one time.
The Port 2 generated the worst case, so it was selected to test and record in the report.
Port 1 and Port 2 could receive simultaneously
For IEEE 802.11b/g/n/VHT/ax (2TX/2RX):
Port 1 and Port 2 can be used as transmitting/receiving antenna.
Port 1 and Port 2 could transmit/receive simultaneously.

<For WLAN 5GHz function>

For IEEE 802.11a/n/ac/ax (1TX/2RX):

The EUT supports the antenna with TX diversity functions.
Both Port 1 and Port 2 support transmit and receive functions, but only one of them will be used at one time.
The Port 1 generated the worst case, so it was selected to test and record in the report.
Port 1 and Port 2 could receive simultaneously

For IEEE 802.11a/n/ac/ax (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.
Port 1 and Port 2 could transmit/receive simultaneously.

<For WLAN 6GHz function>

For IEEE 802.11ax (1TX/2RX):

The EUT supports the antenna with TX diversity functions.
Both Port 1 and Port 2 support transmit and receive functions, but only one of them will be used at one time.
The Port 1 generated the worst case, so it was selected to test and record in the report.
Port 1 and Port 2 could receive simultaneously

For IEEE 802.11ax (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.
Port 1 and Port 2 could transmit/receive simultaneously.

<For Bluetooth function> (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$Directional\ Gain = 10 \cdot \log\left[\frac{\sum_{i=1}^{N_{SS}}\left\{\sum_{k=1}^{N_{ANT}} g_{i,k}\right\}^2}{N_{ANT}}\right]$
BF	$Directional\ Gain = 10 \cdot \log\left[\frac{\sum_{i=1}^{N_{SS}}\left\{\sum_{k=1}^{N_{ANT}} g_{i,k}\right\}^2}{N_{ANT}}\right]$	$Directional\ Gain = 10 \cdot \log\left[\frac{\sum_{i=1}^{N_{SS}}\left\{\sum_{k=1}^{N_{ANT}} g_{i,k}\right\}^2}{N_{ANT}}\right]$

Ex.

Directional Gain (NSS1) formula :

$$Directional\ Gain = 10 \cdot \log\left[\frac{\sum_{i=1}^{N_{SS}}\left\{\sum_{k=1}^{N_{ANT}} g_{i,k}\right\}^2}{N_{ANT}}\right]$$

NSS1(g1,1) = $10^{G1/20}$; NSS1(g1,2)= $10^{G2/20}$

gj,k =$(Nss1(g1,1) + Nss1(g1,2))^2$

DG = 10 log[$(Nss1(g1,1) + Nss1(g1,2)$ / N_{ANT}] => 10 log[$(10^{G1/20} + 10^{G2/20})^2$ / N_{ANT}]

Where ;

Monopole Antenna

2.4G G1 = 3.38 dBi ; G2 = 3.38 dBi ; DG=6.39 dBi

5G G1 = 4.86 dBi ; G2 = 4.86 dBi ; DG=7.87dBi

6G G1 = 4.86 dBi ; G2 = 4.86 dBi ; DG=7.87 dBi

PIFA Antenna

2.4G G1 = 3.5 dBi ; G2 = 3.5 dBi ; DG=6.51 dBi

5G G1 = 5 dBi ; G2 =5 dBi ; DG=8.01dBi

6G G1 = 5 dBi ; G2 =5 dBi ; DG=8.01dBi

Dipole Antenna

2.4G G1 = 3 dBi ; G2 = 3 dBi ; DG=6.01 dBi

5G G1 = 5 dBi ; G2 =5 dBi ; DG=8.01dBi

6G G1 = 5 dBi ; G2 =5 dBi ; DG=8.01dBi

1.1.3 DFS Band Carrier Frequencies

There are four bandwidth systems.

For 20MHz bandwidth systems, use Channel 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 144.

For 40MHz bandwidth systems, use Channel 54, 62, 102, 110, 118, 126, 134, 142.

For 80MHz bandwidth systems, use Channel 58, 106, 122, 138.

For 160MHz bandwidth systems, use Channel 50, 114

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5250~5350 MHz Band 2	50	5250 MHz	58	5290 MHz
	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310 MHz
	56	5280 MHz	64	5320 MHz
5470~5725 MHz Band 3	100	5500 MHz	122	5610 MHz
	102	5510 MHz	124	5620 MHz
	104	5520 MHz	126	5630 MHz
	106	5570 MHz	128	5640 MHz
	108	5540 MHz	132	5660 MHz
	110	5530 MHz	134	5670 MHz
	112	5560 MHz	136	5680 MHz
	114	5570 MHz	138	5690 MHz
	116	5580 MHz	140	5700 MHz
	118	5590 MHz	142	5710 MHz
	120	5600 MHz	144	5720 MHz

1.2 Accessories

N/A

1.3 Support Equipment

Support Equipment				
No.	**Equipment**	**Brand Name**	**Model Name**	**FCC ID**
A	Notebook	DELL	E4300	N/A
B	Notebook	DELL	E4300	N/A
C	WLAN AP	ASUS	RT-AX88U	MSQ-RTAXHP00
D	Fixture	REALTEK	Ameba adapter	N/A

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

1.5 Testing Location Information

Testing Location Information		
Test Lab.：Sporton International Inc. Hsinchu Laboratory		
Hsinchu	ADD: No.8, Ln. 724, Bo’ ai St., Zhubei City, Hsinchu County 302010, Taiwan	
(TAF: 3787)	TEL: 886-3-656-9065	FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.	
	Conformity Assessment Body Identifier (CABID) TW3787 with ISED.	

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
DFS <EUT with 0 dBi receive antenna>	DF01-CB	Justin Lin	20.2-20.9 / 64-66	Dec. 29, 2021
DFS <EUT with -5 dBi receive antenna>	DF01-CB	Bruce Yang	20.4-21.8 / 63-65	May 21, 2022

2 Test Configuration of EUT

2.1 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
IEEE Std.	**Test Channel Freq. (MHz)**
802.11ax (HEW160)	5570 MHz

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	Dynamic Frequency Selection (DFS)
Test Condition	Radiated measurement The EUT shall be configured to operate at the highest transmitter output power setting. If more than one antenna assembly is intended for this power setting, the gain of the antenna assembly with the lowest gain shall be used. The DFS radar test signals have been aligned to the direction corresponding to the EUT's maximum antenna gain.
Modulation Mode	802.11ax (HEW160)
1	EUT with 0 dBi receive antenna
2	EUT with -5 dBi receive antenna

3 Dynamic Frequency Selection (DFS) Test Result

3.1 General DFS Information

3.1.1 DFS Parameters

Table D.1: DFS requirement values	
Parameter	**Value**
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds (Note 1).
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second periods. (Notes 1 and 2).
U-NII Detection Bandwidth	Minimum 100% of the 99% power bandwidth (Note 3).
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.	

Table D.2: Interference threshold values	
Maximum Transmit Power	**Value (see note)**
EIRP ≥ 200 mW	-64 dBm
EIRP < 200 mW and PSD < 10dBm/MHz	-62 dBm
EIRP < 200 mW and PSD >= 10dBm/MHz	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911D01.	

3.1.2 Applicability of DFS Requirements Prior to Use of a Channel

Requirement	DFS Operational mode		
	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

3.1.3 Applicability of DFS Requirements during Normal Operation

Requirement	DFS Operational mode		
	Master	Client without radar detection	Client with radar detection
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

3.1.4 Channel Loading/Data Streaming

☐	The data file (MPEG-4) has been transmitting in a streaming mode.
☒	Software to ping the client is permitted to simulate data transfer with random ping intervals.
☒	Minimum channel loading of approximately 17%.
☐	Unicast protocol has been used.

3.2 Radar Test Waveform Calibration

3.2.1 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	See Note 1	See Note 1
1A	1	15 unique PRI in KDB 905462 D02 Table 5a	$Roundup\left\{\left(\frac{1}{360}\right)\times\left(\frac{19\times10^6}{PRI}\right)\right\}$	60%	15
1B	1	15 unique PRI within 518-3066, Excluding 1A PRI		60%	15
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the short pulse radar types 1 through 4. If more than 30 waveforms are used for short pulse radar types 1 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

3.2.2 Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per *Burst*	Number of *Bursts*	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Each waveform is defined as follows:

- The transmission period for the Long Pulse Radar test signal is 12 seconds.
- There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst Count.
- Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a transmission period will have the same chirp width. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and

ends at 5310 MHz.

- If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst Count. Each interval is of length (12,000,000 / Burst Count) microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and [(12,000,000 / Burst Count) – (Total Burst Length) + (One Random PRI Interval)] microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

3.2.3 Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30

The FCC Type 6 waveform uses a static waveform with 100 bursts in the instruments ARB. In addition, the RF list mode is operated with a list containing 100 frequencies from a randomly generated list and it had be ensured that at least one of the random frequencies falls into the UNII Detection Bandwidth of the DUT. Each burst from the waveform file initiates a trigger pulse at the beginning that switches the RF list from one item to the next one.

3.2.4 DFS Threshold Level

DFS Threshold Level	
DFS Threshold level:	<EUT with 0 dBi receive antenna> -63 dBm <EUT with -5 dBi receive antenna> -68 dBm
☐	at the antenna connector
☒	in front of the antenna
<EUT with 0 dBi receive antenna> The Interference Radar Detection Threshold Level is -64 dBm + 0 [dBi] + 1 dB = -63 dBm. <EUT with -5 dBi receive antenna> The Interference Radar Detection Threshold Level is -64 dBm + (-5 [dBi]) + 1 dB = -68 dBm. That had been taken into account the output power range and antenna gain.	

3.2.5 Calibration Setup

Client Radiated Calibration Setup

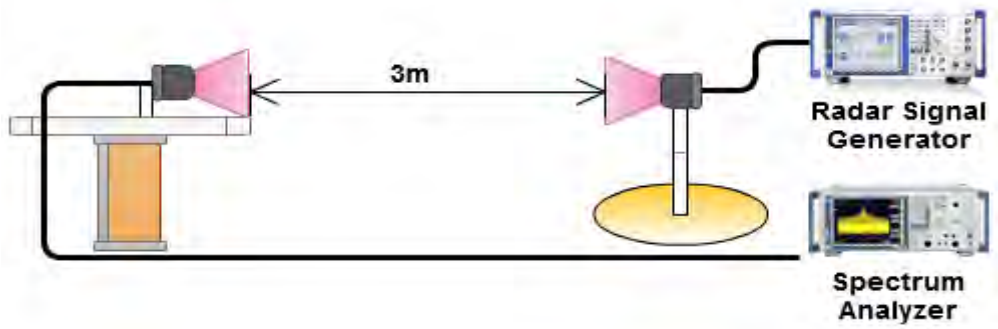

3.2.6 Radar Waveform calibration Plot

<EUT with 0 dBi receive antenna>

Test Frequency: 5570 MHz
Radar #0 DFS detection threshold level

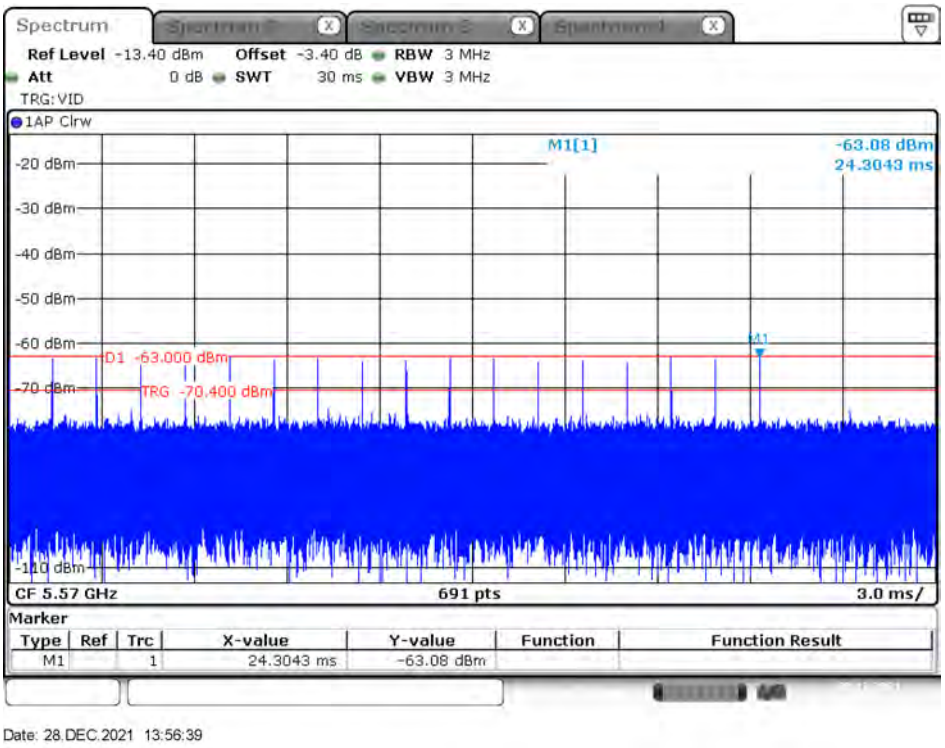

<EUT with -5 dBi receive antenna>

Test Frequency: 5570 MHz

Radar #0 DFS detection threshold level

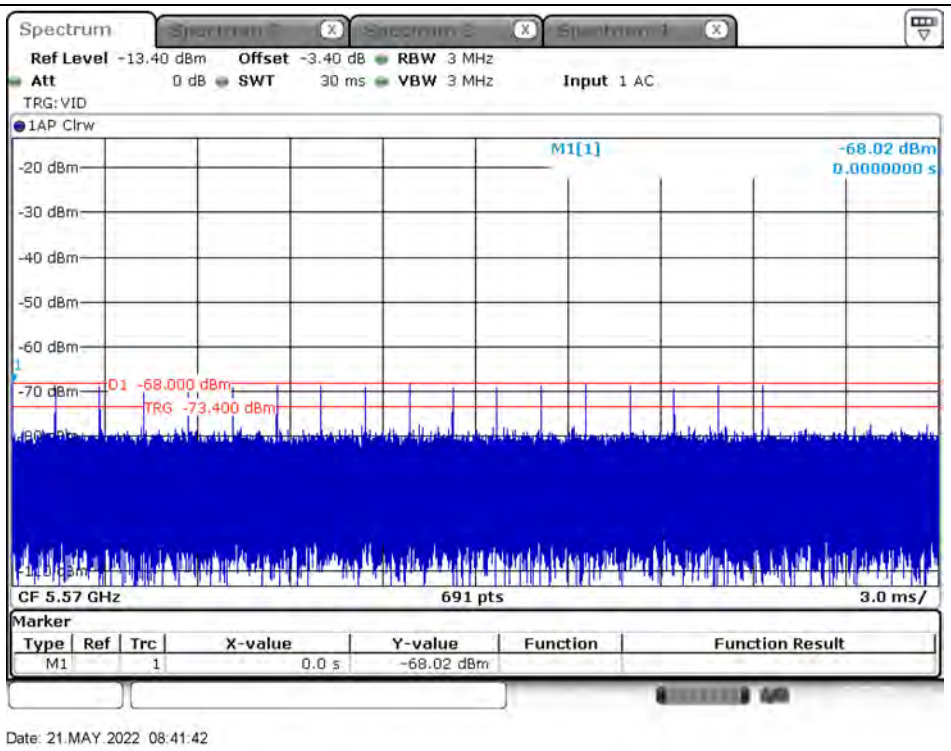

3.2.7 Test Setup

A spectrum analyzer is used as a monitor to verify that the EUT has vacated the Channel within the (Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and Channel move.

Client without Radar Detect Radiated Measurement

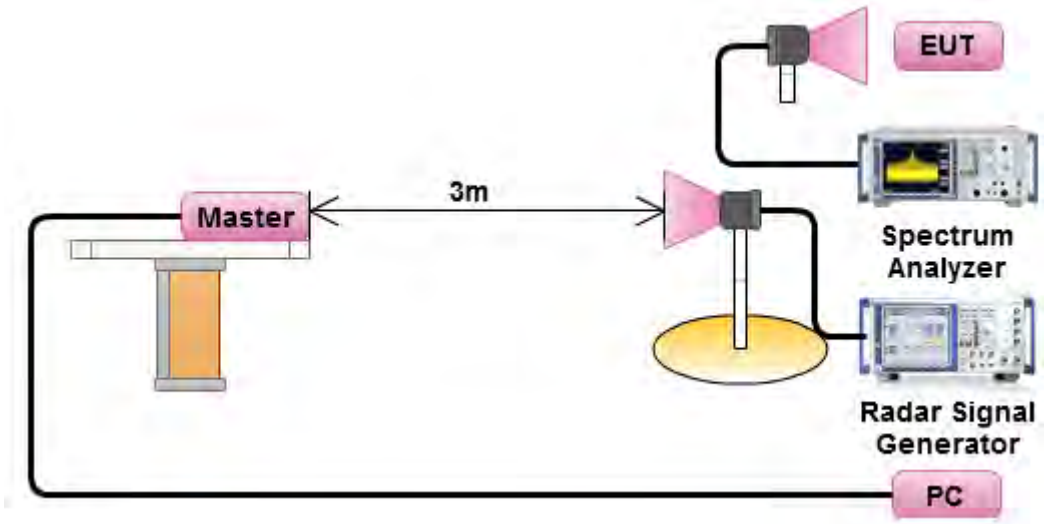

3.2.8 Data traffic Plot

<EUT with 0 dBi receive antenna>

EUT Data traffic Plot	Modulation Mode: 802.11ax (HEW160)	Test Frequency: 5570 MHz

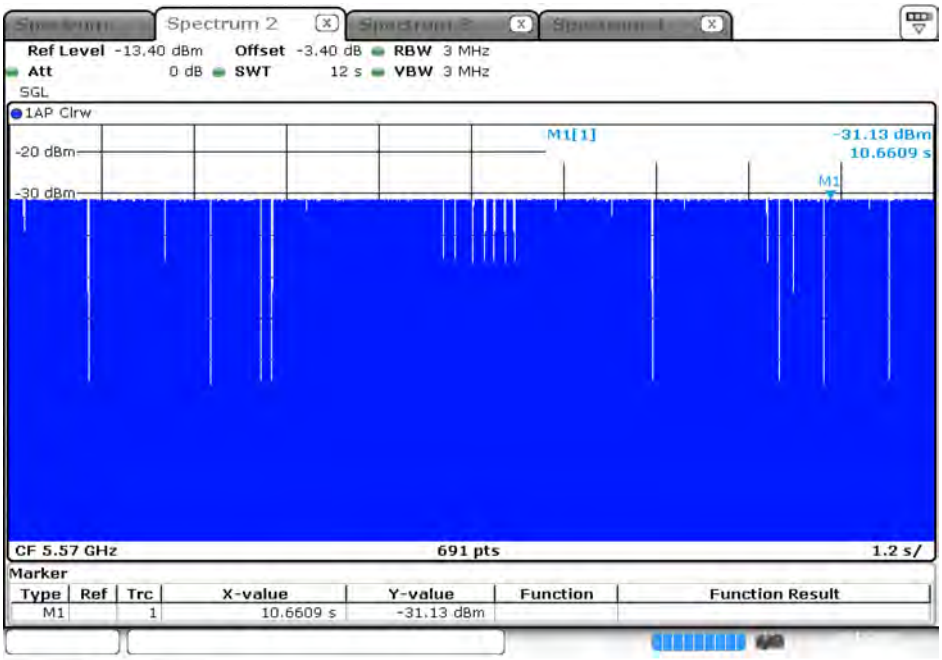

Date: 28.DEC.2021 14:03:04

Master Data Traffic Plot	Modulation Mode: 802.11ax (HEW160)	Test Frequency: 5570 MHz

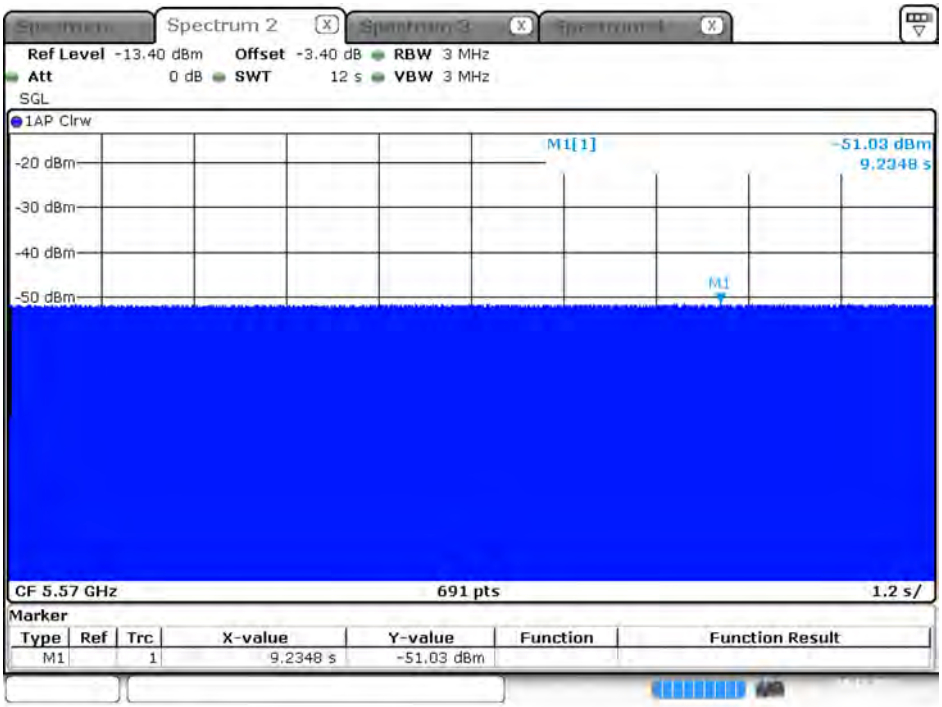

Date: 28.DEC.2021 14:03:50

Without Data Traffic Plot	Modulation Mode: 802.11ax (HEW160)	Test Frequency: 5570 MHz

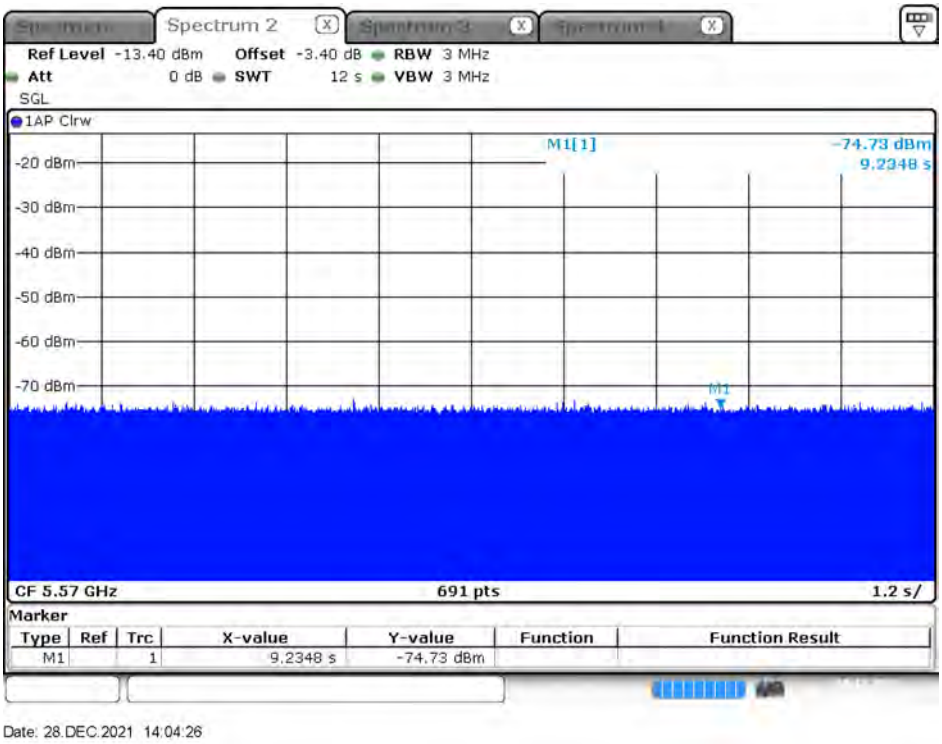

<EUT with -5 dBi receive antenna>

EUT Data traffic Plot	Modulation Mode: 802.11ax (HEW160)	Test Frequency: 5570 MHz

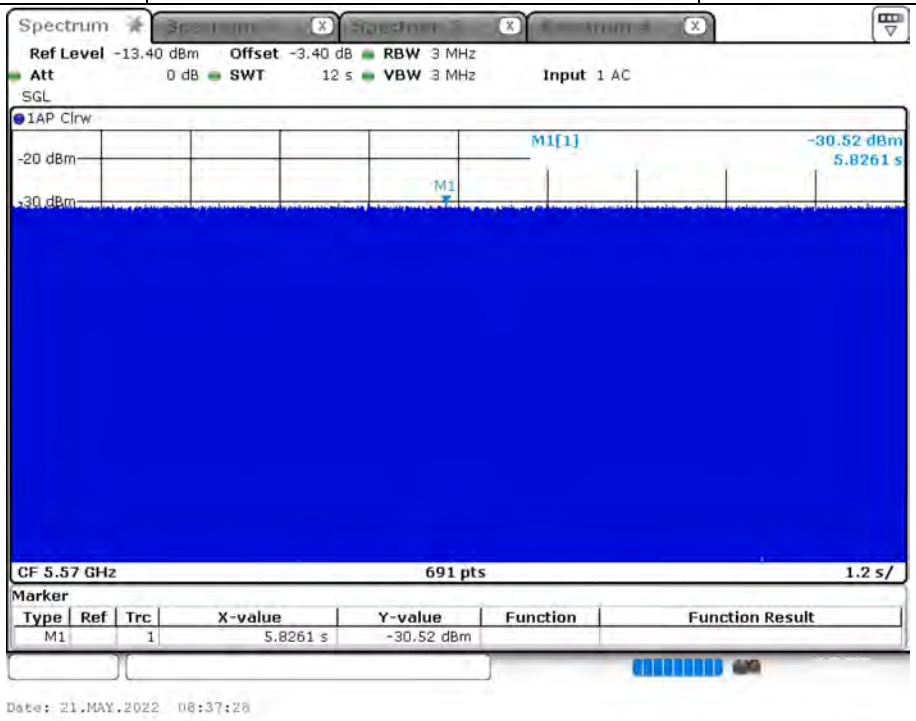

Master Data Traffic Plot	Modulation Mode: 802.11ax (HEW160)	Test Frequency: 5570 MHz

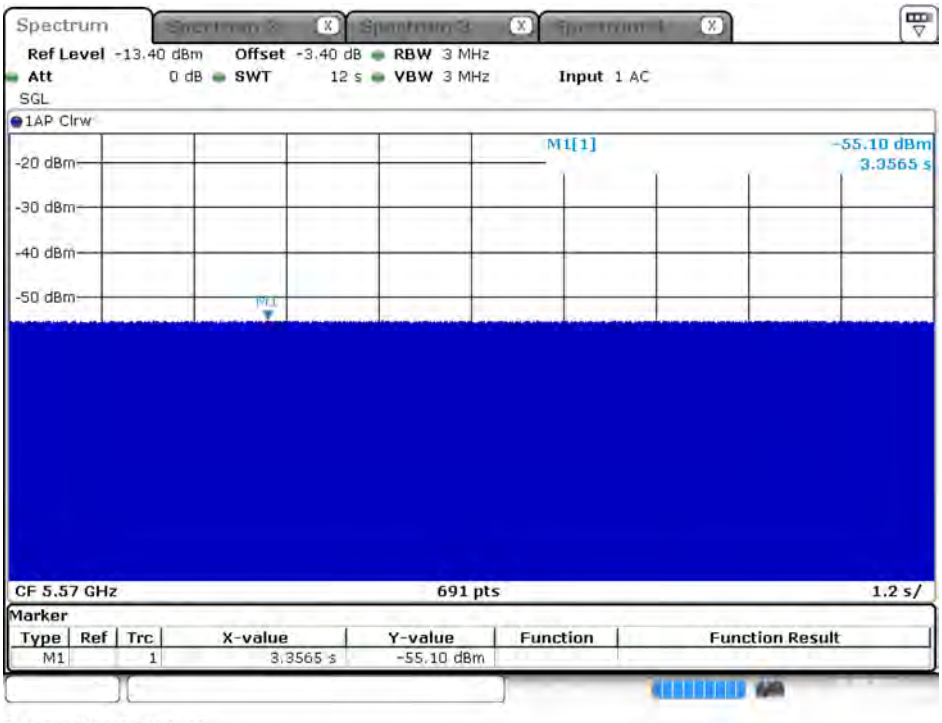

Without Data Traffic Plot	Modulation Mode: 802.11ax (HEW160)	Test Frequency: 5570 MHz

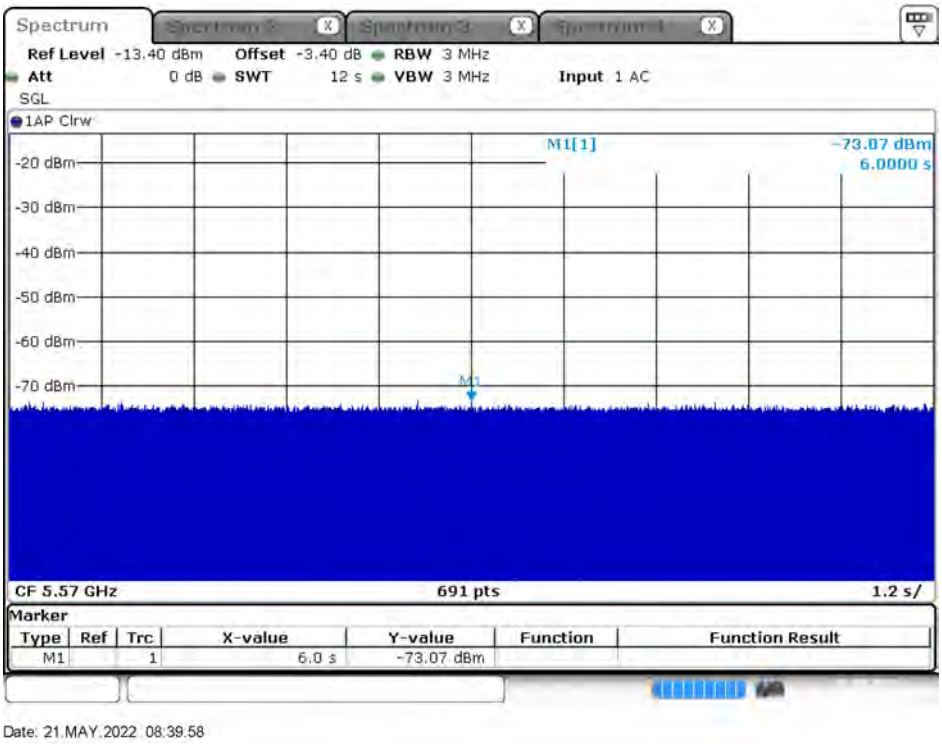

3.3 In-service Monitoring

3.3.1 In-service Monitoring Limit

In-service Monitoring Limit	
Channel Move Time	10 sec
Channel Closing Transmission Time	200 ms + an aggregate of 60 ms over remaining 10 sec periods.
Non-occupancy period	Minimum 30 minutes

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

	Test Method
☒	Verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing Transmission Time limits.
☒	Verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. One 12 sec plot needs to be reported for the Short Pulse Radar Types 0. And zoom-in a 60 ms plot verified channel closing time for the aggregate transmission time starting from 200ms after the end of the radar signal to the completion of the channel move.
☒	Verified during In-Service Monitoring; Non-Occupancy Period. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Non-Occupancy Period). Compare the Non-Occupancy Period limits.

3.3.4 Test Result of Channel Move Time

<EUT with 0 dBi receive antenna>
Modulation Mode: 802.11ax (HEW160)

Parameter	Test Result	Limit
	Type 0	
Test Channel (MHz)	5570 MHz	-
Channel Move Time (sec.)	0.069	< 10s

Modulation Mode	Freq.	Radar Type
802.11ax (HEW160)	5570 MHz	0

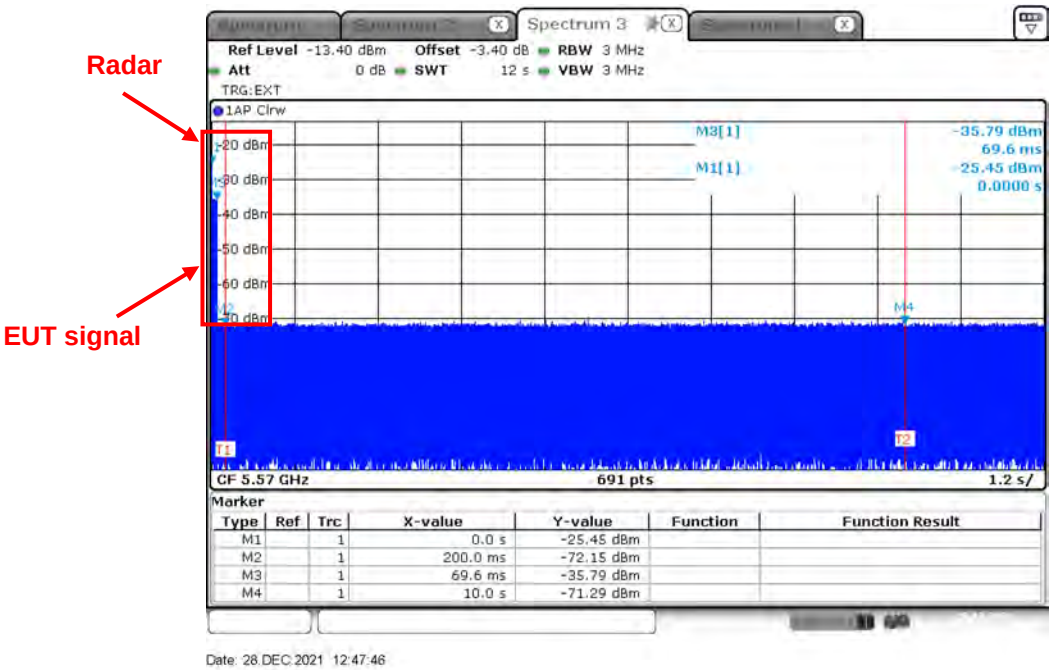

<EUT with -5 dBi receive antenna>
Modulation Mode: 802.11ax (HEW160)

Parameter	Test Result	Limit
	Type 0	
Test Channel (MHz)	5570 MHz	-
Channel Move Time (sec.)	0.052	< 10s

Modulation Mode	Freq.	Radar Type
802.11ax (HEW160)	5570 MHz	0

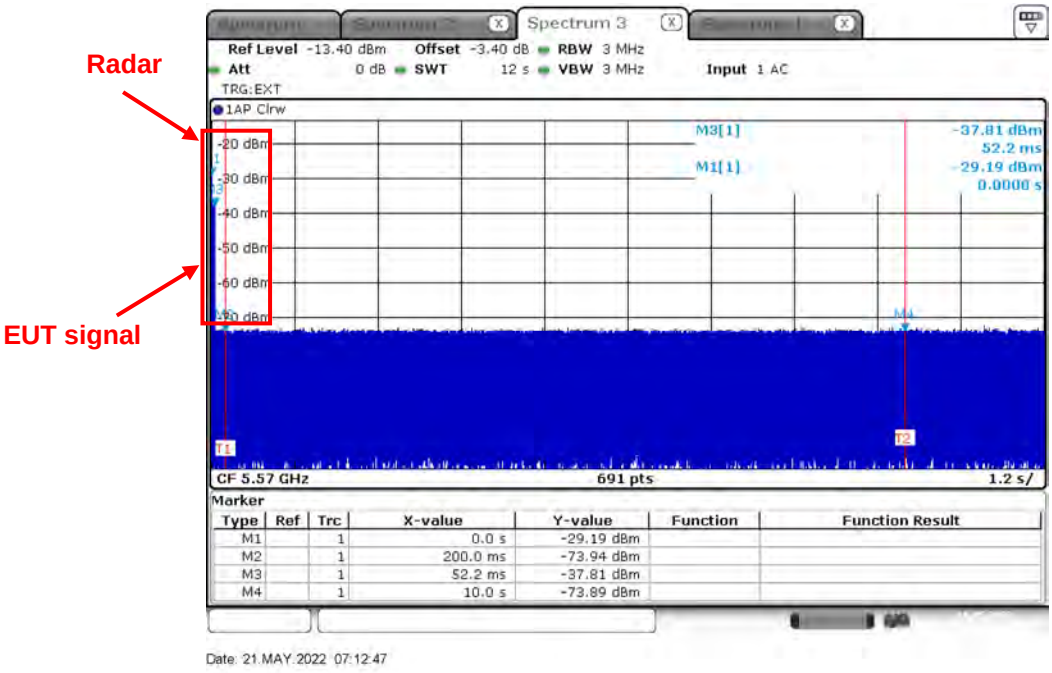

3.3.5 Test Result of Channel Closing Transmission Time

<EUT with 0 dBi receive antenna>
Modulation Mode: 802.11ax (HEW160)

Parameter	Test Result	Limit
	Type 0	
Test Channel (MHz)	5570 MHz	-
Channel Closing Transmission Time (ms) (Note)	0.000	＜ 60ms

Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Modulation Mode	Freq.	Radar Type
802.11ax (HEW160)	5570 MHz	0
Channel Closing Transmission Time is comprised of 200 ms starting at the beginning of the Channel Move Time plus 60ms additional intermittent control signals		

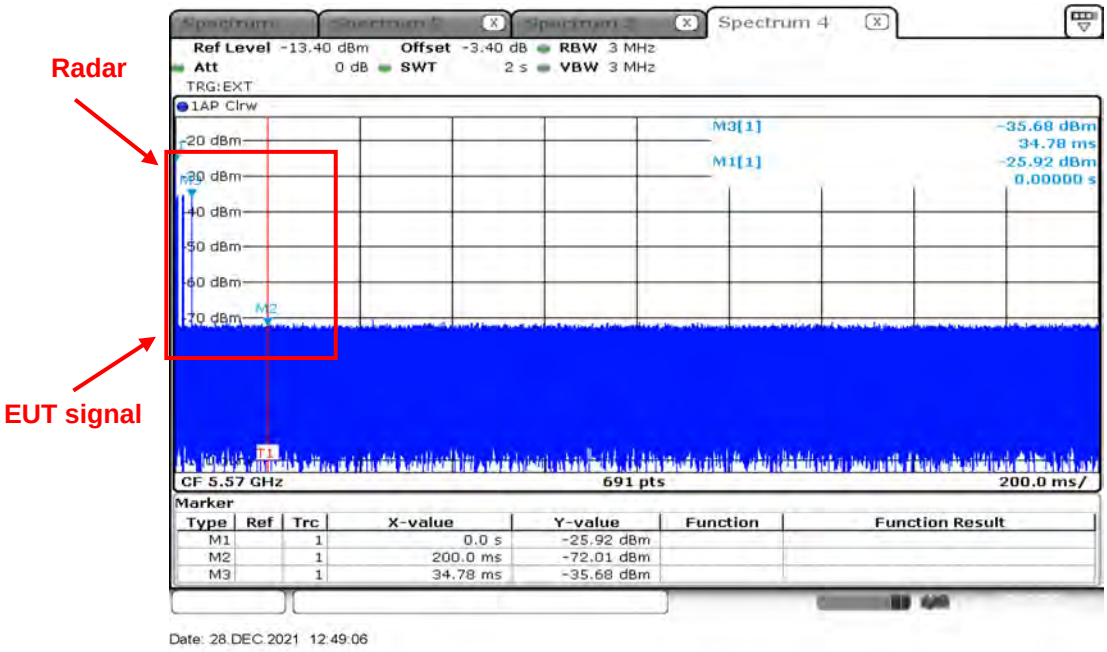

Dwell is the dwell time per spectrum analyzer sampling bin.
S is the sweep time
B is the number of spectrum analyzer sampling bins
C is the intermittent control signals of Channel Closing Transmission Time
N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission
Dwell (2.900ms)= S (2000 ms) / B (690)
C (0 ms) = N (0) X Dwell (2.900 ms)

<EUT with -5 dBi receive antenna>
Modulation Mode: 802.11ax (HEW160)

Parameter	Test Result	Limit
	Type 0	
Test Channel (MHz)	5570 MHz	-
Channel Closing Transmission Time (ms) (Note)	0.000	＜ 60ms

Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Modulation Mode	Freq.	Radar Type
802.11ax (HEW160)	5570 MHz	0
Channel Closing Transmission Time is comprised of 200 ms starting at the beginning of the Channel Move Time plus 60ms additional intermittent control signals		

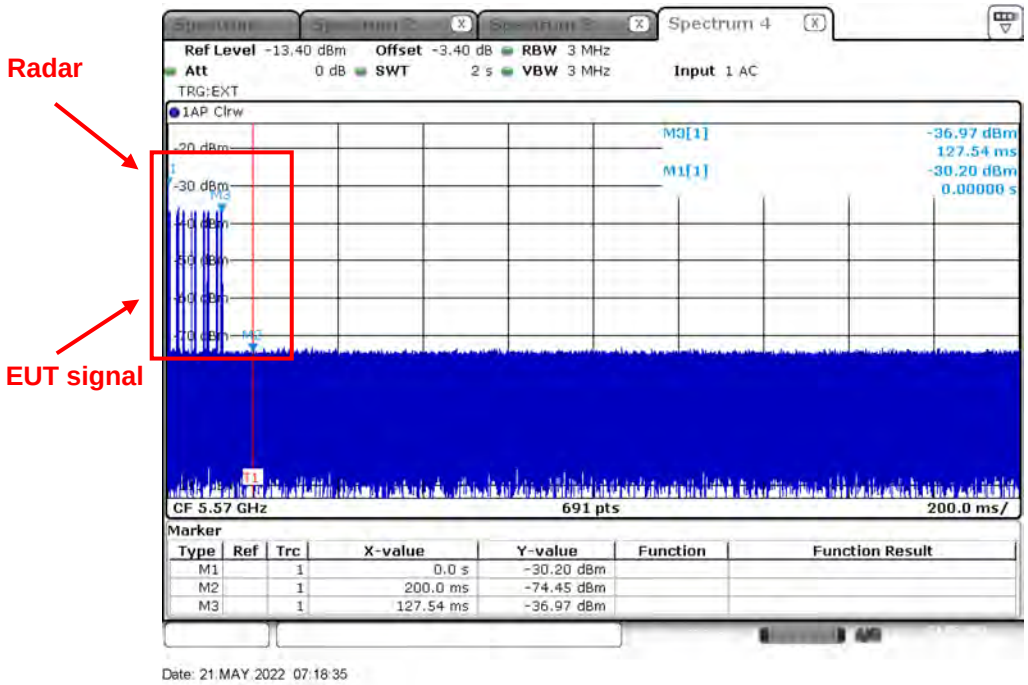

Dwell is the dwell time per spectrum analyzer sampling bin.
S is the sweep time
B is the number of spectrum analyzer sampling bins
C is the intermittent control signals of Channel Closing Transmission Time
N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission
Dwell (2.900ms)= S (2000 ms) / B (690)
C (0 ms) = N (0) X Dwell (2.900 ms)

3.3.6 Test Result of Non-Occupancy Period

<EUT with 0 dBi receive antenna>
Modulation Mode: 802.11ax (HEW160)

Parameter	Test Result	Limit
	Type 0	
Test Channel (MHz)	5570 MHz	-
Non-Occupancy Period (min.)	≧30	≧ 30 min

Modulation Mode	Freq.
802.11ax (HEW160)	5570 MHz

Non-Occupancy Period

During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring.

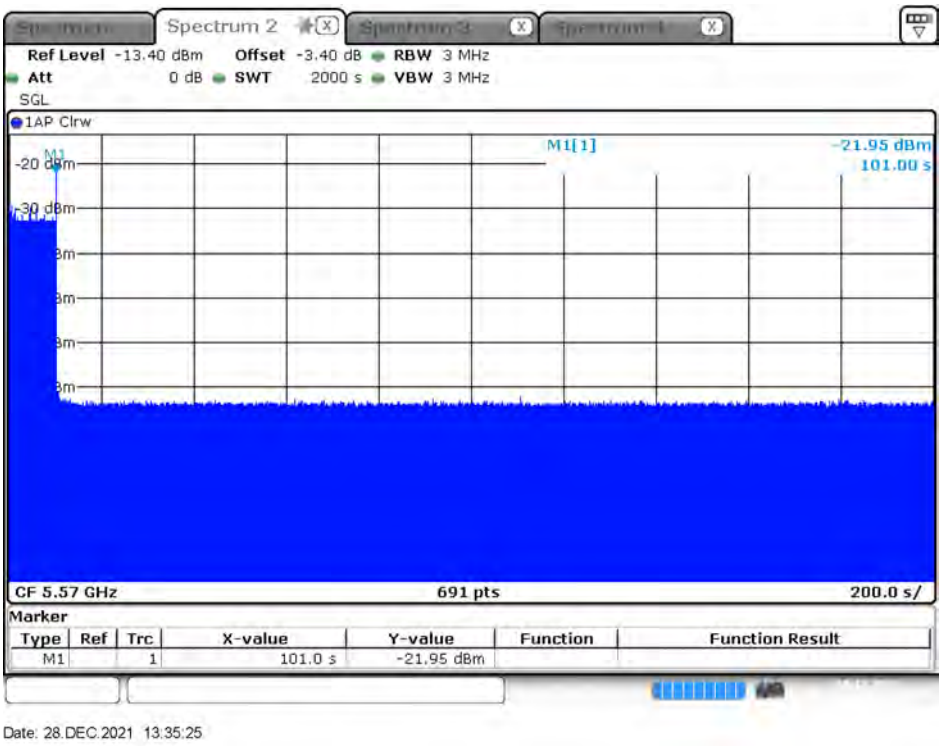

Non-associated test
Master was off.
During the 30 minutes observation time, The UUT did not make any transmissions in the DFS band after UUT power up.

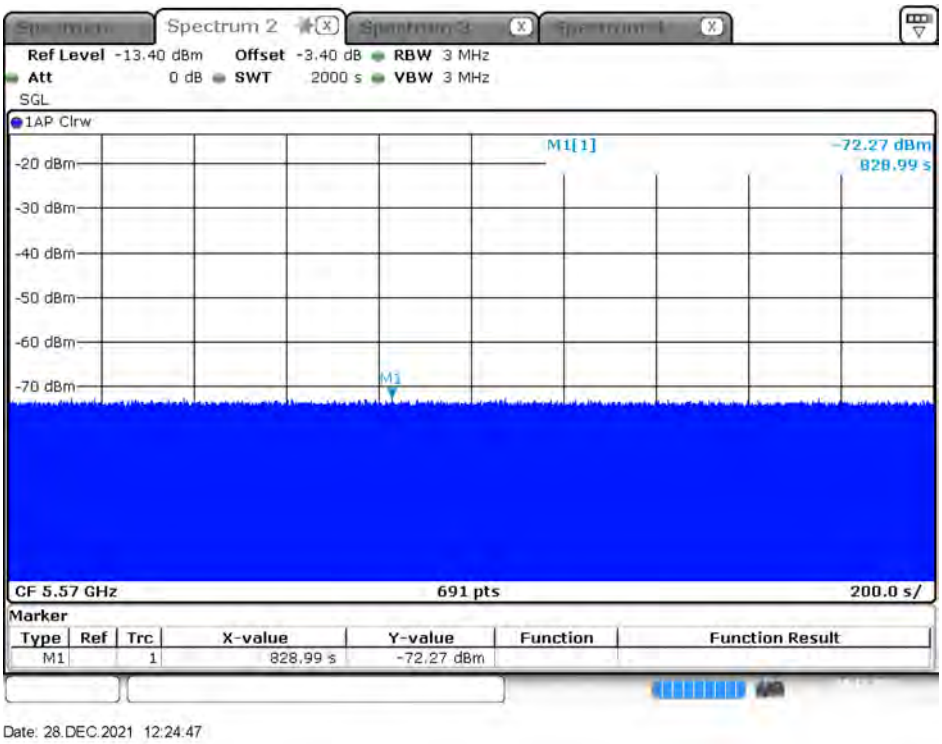

<EUT with -5 dBi receive antenna>
Modulation Mode: 802.11ax (HEW160)

Parameter	Test Result	Limit
	Type 0	
Test Channel (MHz)	5570 MHz	-
Non-Occupancy Period (min.)	≧30	≧ 30 min

Modulation Mode	Freq.
802.11ax (HEW160)	5570 MHz

Non-Occupancy Period

During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring.

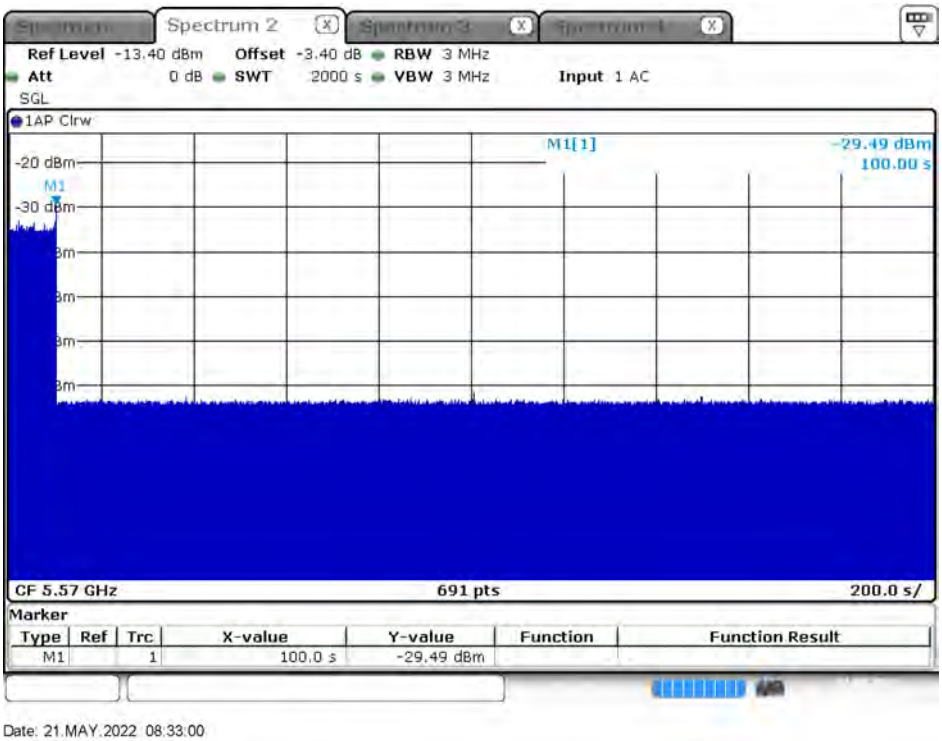

Non-associated test
Master was off.
During the 30 minutes observation time, The UUT did not make any transmissions in the DFS band after UUT power up.

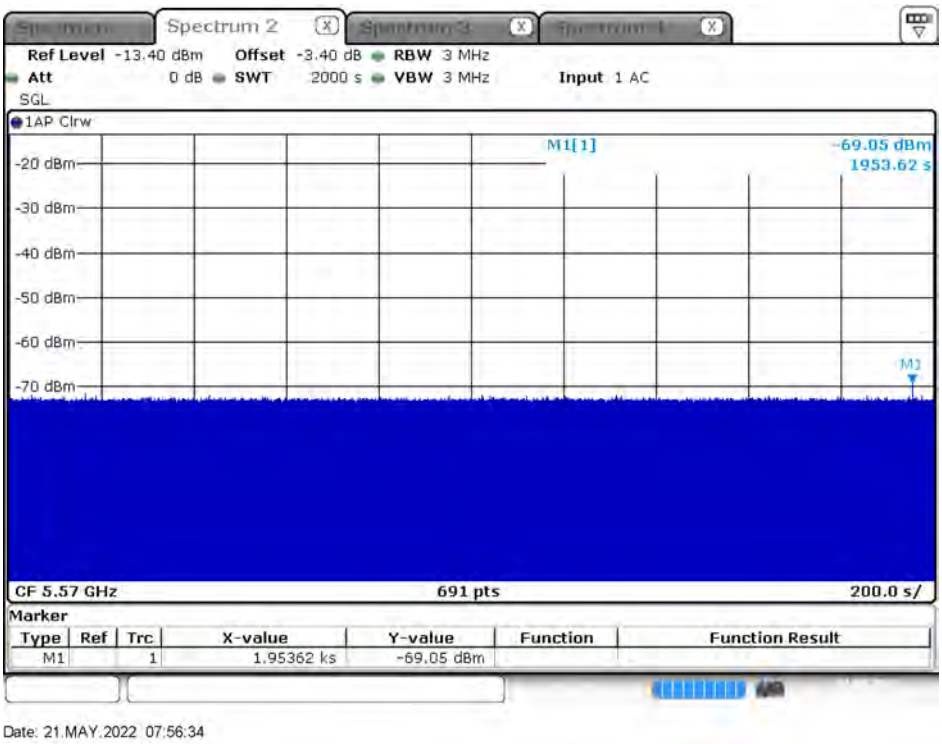

4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101026	9kHz~40GHz	Dec. 07, 2021	Dec. 06, 2022	Radiated (DF01-CB)
Vector Signal generator	R&S	SMU200A	102782	100kHz-6GHz	Jun. 24, 2021	Jun. 23, 2022	Radiated (DF01-CB)
Horn Antenna	COM-POWER	AH-118	071187	1GHz – 18GHz	Jul. 29, 2021	Jul. 28, 2022	Radiated (DF01-CB)
Horn Antenna	COM-POWER	AH-118	071028	1GHz ~ 18GHz	Jun. 23, 2021	Jun. 22, 2022	Radiated (DF01-CB)
RF Power Divider	STI	2 Way	DV-2way -05	1GHz ~ 8GHz	Oct. 04, 2021	Oct. 03, 2022	Radiated (DF01-CB)
RF Power Divider	STI	2 Way	DV-2way -06	1GHz ~ 8GHz	Oct. 04, 2021	Oct. 03, 2022	Radiated (DF01-CB)
RF Power Divider	MTJ	4 Way	DFS-01-DV-01	1GHz ~ 6GHz	Oct. 04, 2021	Oct. 03, 2022	Radiated (DF01-CB)
RF Cable-high	Woken	RG402	High Cable-57	1 GHz –18 GHz	Oct. 04, 2021	Oct. 03, 2022	Radiated (DF01-CB)
RF Cable-high	Woken	RG402	High Cable-58	1 GHz –18 GHz	Oct. 04, 2021	Oct. 03, 2022	Radiated (DF01-CB)
RF Cable-high	Woken	RG402	High Cable-59	1 GHz –18 GHz	Oct. 04, 2021	Oct. 03, 2022	Radiated (DF01-CB)

Note: Calibration Interval of instruments listed above is one year.

5 Measurement Uncertainty

Test Items	Uncertainty	Remark
Radiated Emission	3.5 dB	Confidence levels of 95%

1. Photographs of Dynamic Frequency Selection Test Configuration

FRONT VIEW

CLOSE-UP VIEW

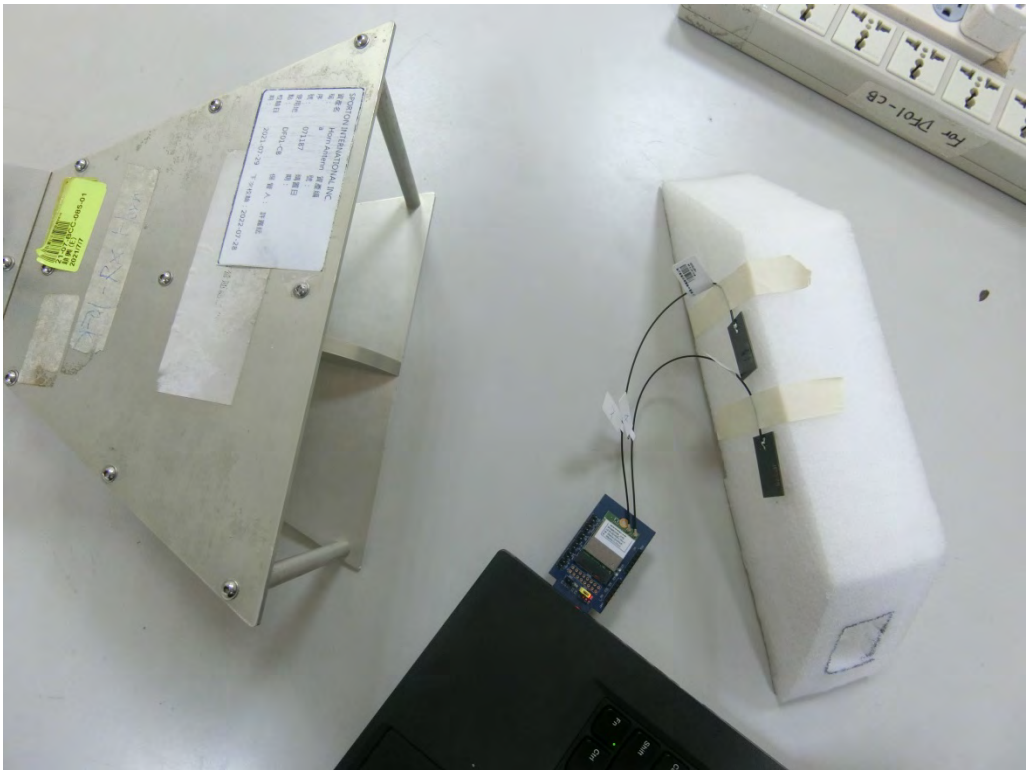

———THE END———