



TEST REPORT

Applicant Name : Shenzhen Srhythm Industry Co., Ltd.
Address : 1602 Zhongan Building, GuangchangRoad, Wenjing Community,
BujiStreet, Longgang District, Shenzhen, Guangdong, China,518000
Report Number : SZNS1220224-05893E-RF
FCC ID: 2A4TBT2005

Test Standard (s)
FCC PART 15.247

Sample Description

Product Type: transmitter
Model No.: T2
Multiple Model: T2 Pro, T3
Date Received: 2022-02-24
Date of Test: 2022-03-08 to 2022-03-22
Report Date: 2022-03-23

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Black Ding

Black Ding
EMC Engineer

Approved By:

Candy Li

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “★”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	10
FCC §15.203 – ANTENNA REQUIREMENT	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP	13
EMI TEST RECEIVER SETUP	13
TEST PROCEDURE	14
FACTOR & MARGIN CALCULATION	14
TEST DATA	14
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS	17
APPLICABLE STANDARD	17
EUT SETUP	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	18
TEST PROCEDURE	18
FACTOR & MARGIN CALCULATION	18
TEST DATA	18
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	27
APPLICABLE STANDARD	27
TEST PROCEDURE	27
TEST DATA	27
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST DATA	31
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45

TEST DATA	45
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	48
APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST DATA	48
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....	62
APPLICABLE STANDARD	62
TEST PROCEDURE	62
TEST DATA	62
FCC §15.247(d) - BAND EDGES TESTING	69
APPLICABLE STANDARD	69
TEST PROCEDURE	69
TEST DATA	69

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	transmitter
Tested Model	T2
Multiple Model:	T2 Pro, T3
Model difference:	Please refer to DOS letter
Frequency Range	2402~2480MHz
Maximum conducted Peak output power	Ant1: 0.66dBm, Ant2: 0.74dBm
Modulation Technique	BDR(GFSK), EDR($\pi/4$ -DQPSK)
Antenna Specification*	Internal Antenna: 0dBi(provided by the applicant)
Voltage Range	DC 3.7V from battery or DC 5V from USB port.
Sample number	SZNS1220224-05893E-RF-S1(Assigned by ATC)
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

Software “FCC Assist 1.1”* was used during testing and the power level was 0*.

Special Accessories

N/A.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
SHENZHEN KEYU POWER SUPPLY TECHNOLOGY CO.,LTD	Adapter	KA1803A-US	2045
Lenovo	Lenovo Mobile Phone	Lenovo A7020a48	0560

External I/O Cable


Cable Description	Length (m)	From/Port	To
Un-shielding Detachable USB Cable	0.5	EUT	Adapter
Un-shielding Detachable AUX IN Cable	0.5	EUT	Phone

Block Diagram of Test Setup

For conducted emission:

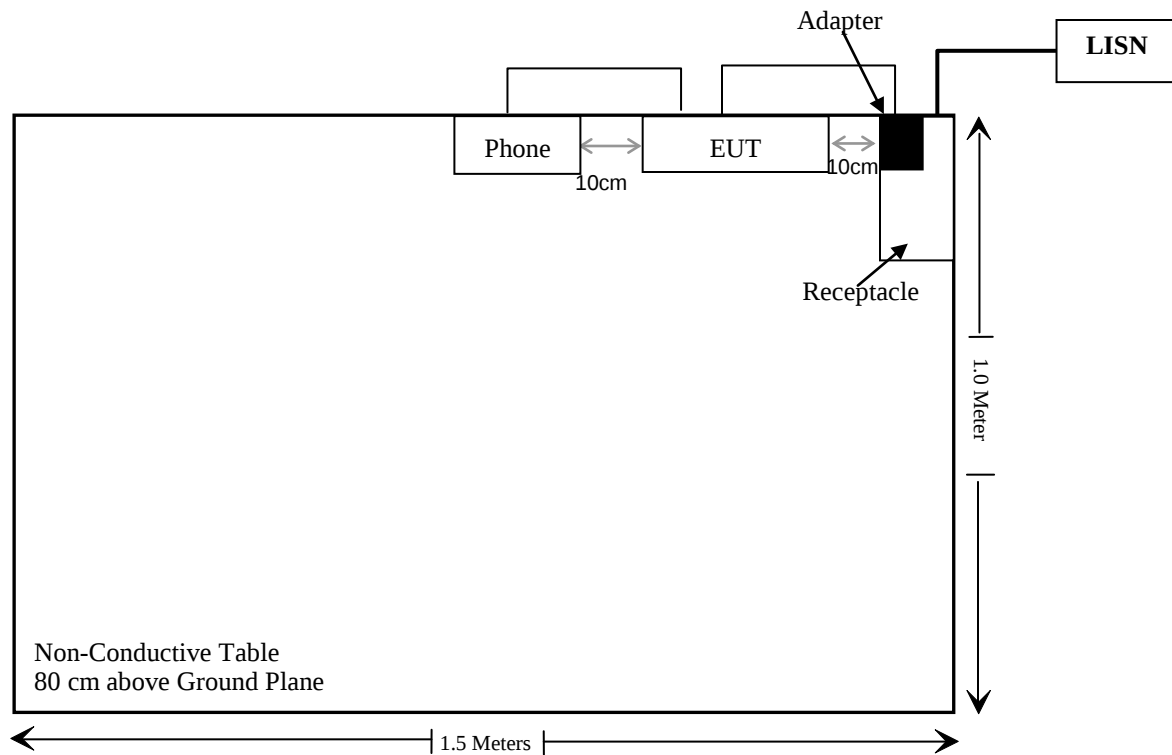

For radiated emission:

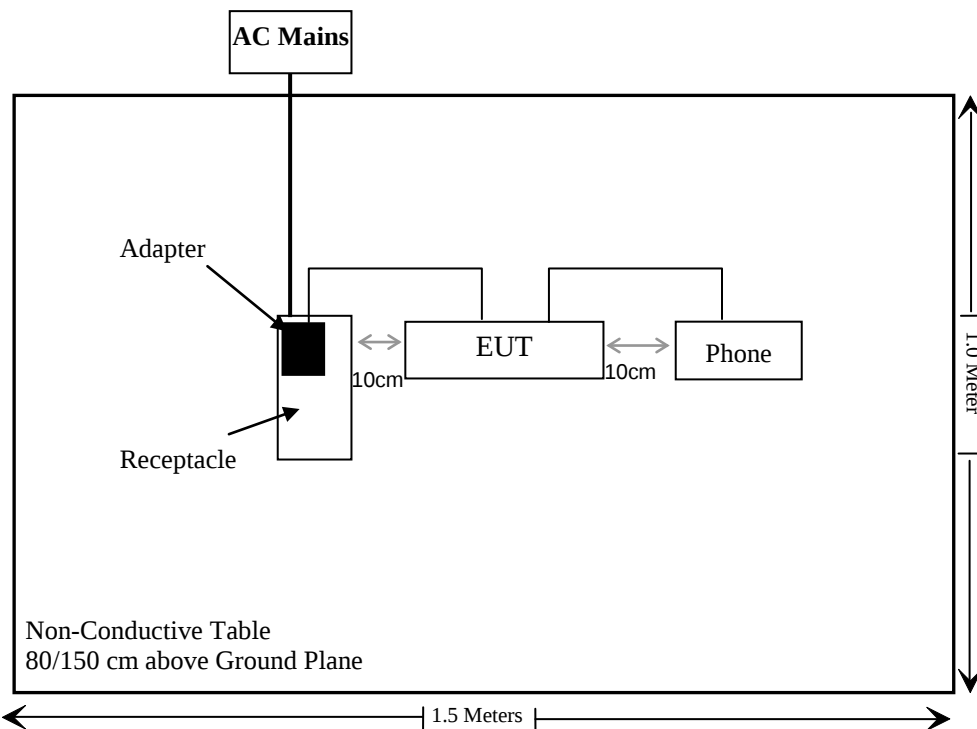

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i), §2.1091	Maximum Permissible Exposure(MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
Unknown	RF Coaxial Cable	No.17	N0350	2021/12/14	2022/12/13
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde & Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Radiated Emission Test Software: e3 19821b (V9)					
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2021/12/13	2022/12/12
Rohde & Schwarz	Open Switch and Control Unit	OSP120 + OSP-B157	101244 + 100866	2021/12/13	2022/12/12
WEINSCHTEL	10dB Attenuator	5324	AU 3842	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.32	RF-02	Each time	

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)**Applicable Standard**

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result**Calculated Formulary:**

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

For worst case:

Frequency (MHz)	Ant	Maximum Antenna Gain		Tune up conducted power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
2402-2480	1	0	1	1	1.26	20	0.0003	1
2402-2480	2	0	1	1	1.26	20	0.0003	1

Note: 1. The tune up conducted power was declared by the applicant.

2. The Bluetooth antenna 1 is transmitted by module 1, Bluetooth antenna 2 is transmitted by module 2, and they can transmit at the same time.

Simultaneous transmitting consideration (worst case):

The ratio= Power Density_{Ant1/limit} + Power Density_{Ant 2/limit} = 0.0003/1 + 0.0003/1 = 0.0006 < 1.0, so simultaneous exposure is compliant.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has two internal PCB Antennas arrangement for two Bluetooth modules, which were permanently attached and both the antenna gains are 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

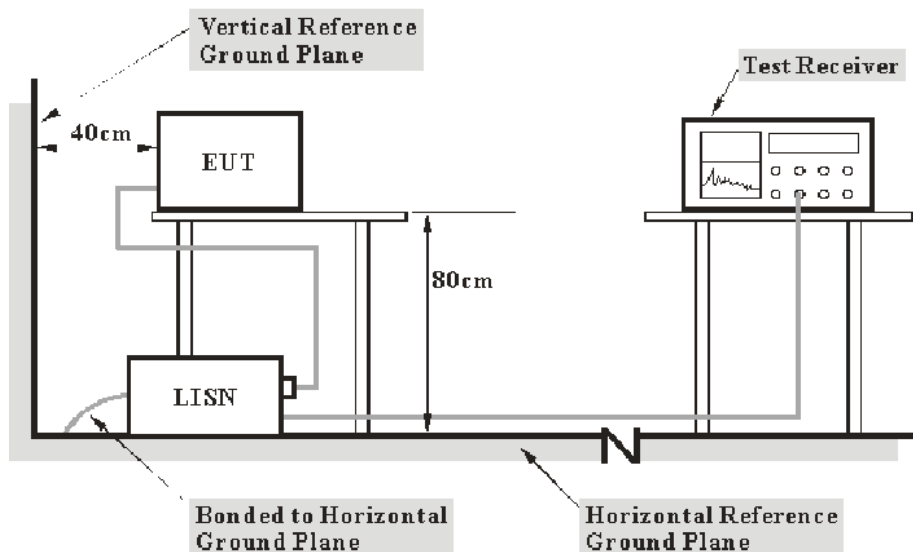

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Margin Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$


Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Caro on 2022-03-10.

EUT operation mode: Charging+BT transmitting(Ant1+Ant2)

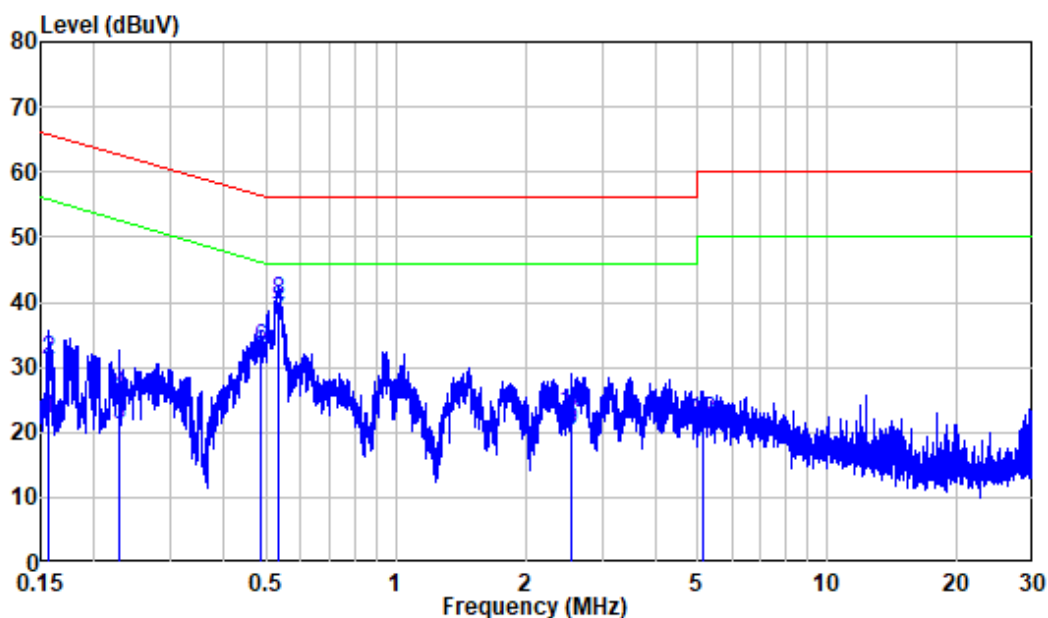AC 120V/60 Hz, Line

Site : Shielding Room
 Condition: Line
 Mode : Charging + TX
 Model : T2
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.156	9.80	12.12	21.92	55.65	-33.73	Average
2	0.156	9.80	21.24	31.04	65.65	-34.61	QP
3	0.229	9.80	11.40	21.20	52.50	-31.30	Average
4	0.229	9.80	15.98	25.78	62.50	-36.72	QP
5	0.487	9.80	21.24	31.04	46.21	-15.17	Average
6	0.487	9.80	23.03	32.83	56.21	-23.38	QP
7	0.533	9.81	27.40	37.21	46.00	-8.79	Average
8	0.533	9.81	30.21	40.02	56.00	-15.98	QP
9	2.552	9.83	10.46	20.29	46.00	-25.71	Average
10	2.552	9.83	13.13	22.96	56.00	-33.04	QP
11	5.122	9.85	8.58	18.43	50.00	-31.57	Average
12	5.122	9.85	11.85	21.70	60.00	-38.30	QP

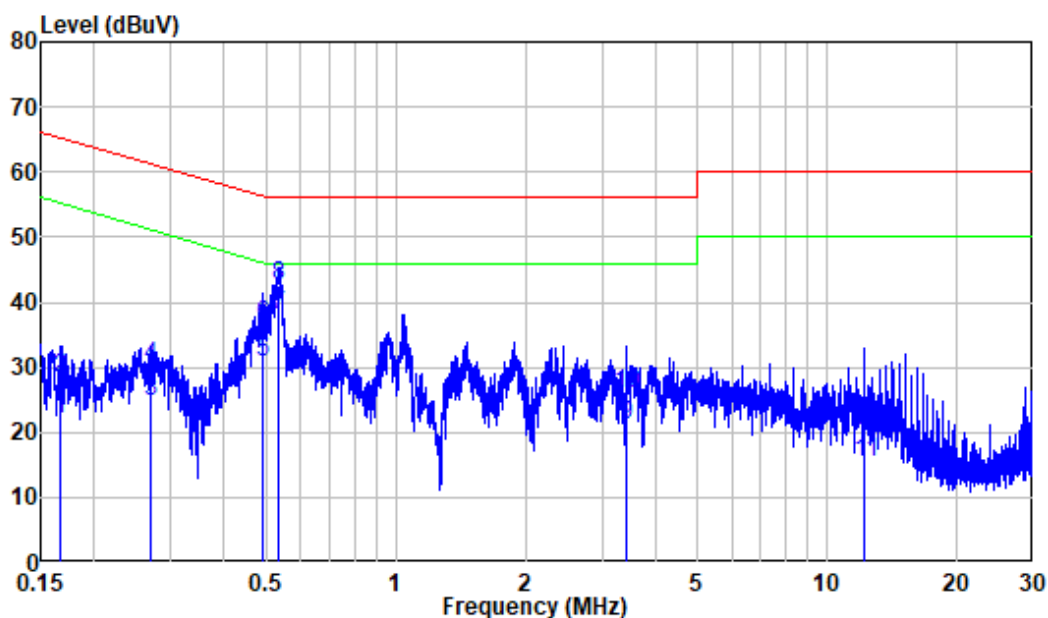AC 120V/60 Hz, Neutral

Site : Shielding Room
 Condition: Neutral
 Mode : Charging + TX
 Model : T2
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBUV	dBUV	dBUV	dB	
1	0.167	9.80	12.18	21.98	55.12	-33.14	Average
2	0.167	9.80	18.66	28.46	65.12	-36.66	QP
3	0.270	9.80	15.02	24.82	51.11	-26.29	Average
4	0.270	9.80	20.29	30.09	61.11	-31.02	QP
5	0.491	9.80	21.02	30.82	46.16	-15.34	Average
6	0.491	9.80	26.82	36.62	56.16	-19.54	QP
7	0.535	9.81	28.20	38.01	46.00	-7.99	Average
8	0.535	9.81	32.82	42.63	56.00	-13.37	QP
9	3.422	9.83	11.34	21.17	46.00	-24.83	Average
10	3.422	9.83	16.27	26.10	56.00	-29.90	QP
11	12.221	10.02	5.33	15.35	50.00	-34.65	Average
12	12.221	10.02	10.16	20.18	60.00	-39.82	QP


FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

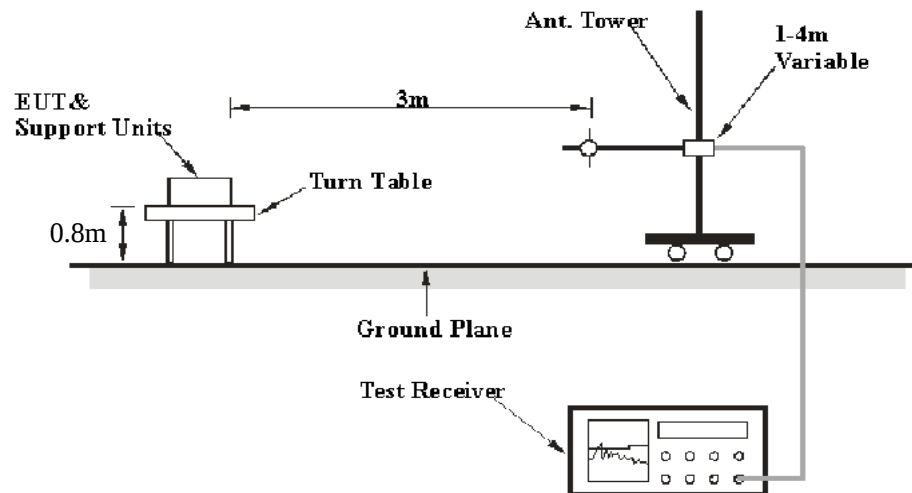

Above 1GHz:

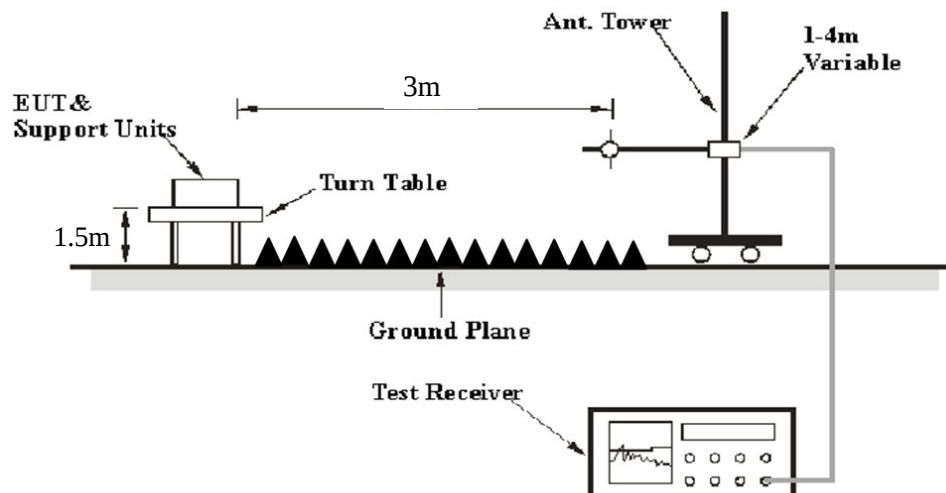

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data


Environmental Conditions

Temperature:	20 °C
Relative Humidity:	58 %
ATM Pressure:	101.0kPa

The testing was performed by Chao Mo on 2022-03-08.

EUT operation mode: Transmitting

(Scan with GFSK, $\pi/4$ -DQPSK mode at X axis, Y axis, Z axis, the worst case are $\pi/4$ -DQPSK Mode at X axis)

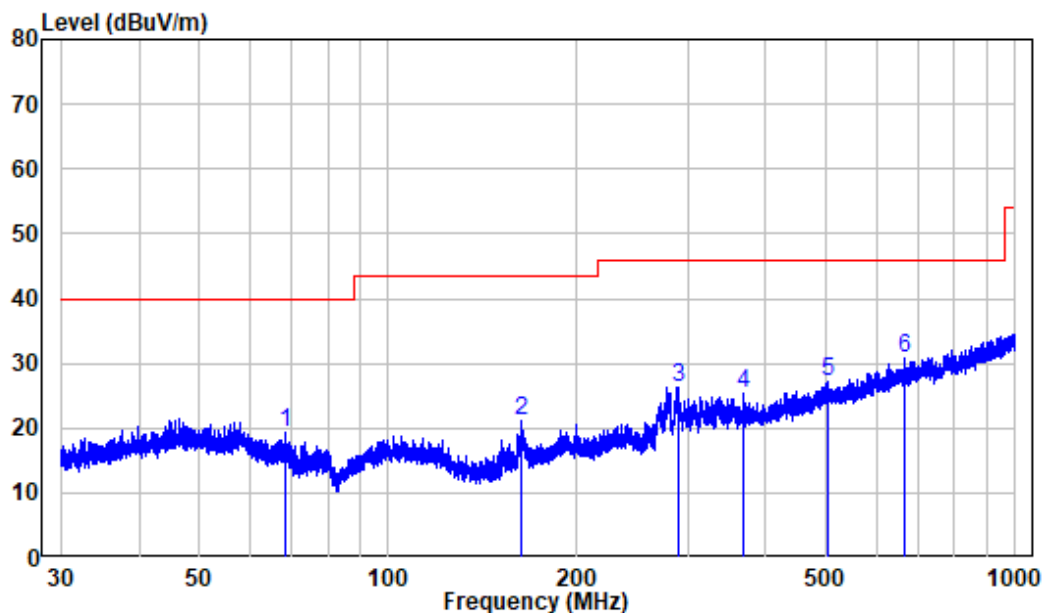Below 1GHz:**Worst case: Transmitting (Ant1 + Ant2)****Horizontal**

Site : chamber


Condition: 3m HORIZONTAL

Job No. : SZNS1220224-05893E-RF

Mode : BT Transmitting(ANT1+ANT2)

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	68.301	-13.98	33.19	19.21	40.00	-20.79	Peak
2	162.896	-14.29	35.27	20.98	43.50	-22.52	Peak
3	290.399	-9.30	35.62	26.32	46.00	-19.68	Peak
4	368.596	-7.38	32.85	25.47	46.00	-20.53	Peak
5	502.279	-4.26	31.28	27.02	46.00	-18.98	Peak
6	666.680	-1.66	32.50	30.84	46.00	-15.16	Peak

Vertical

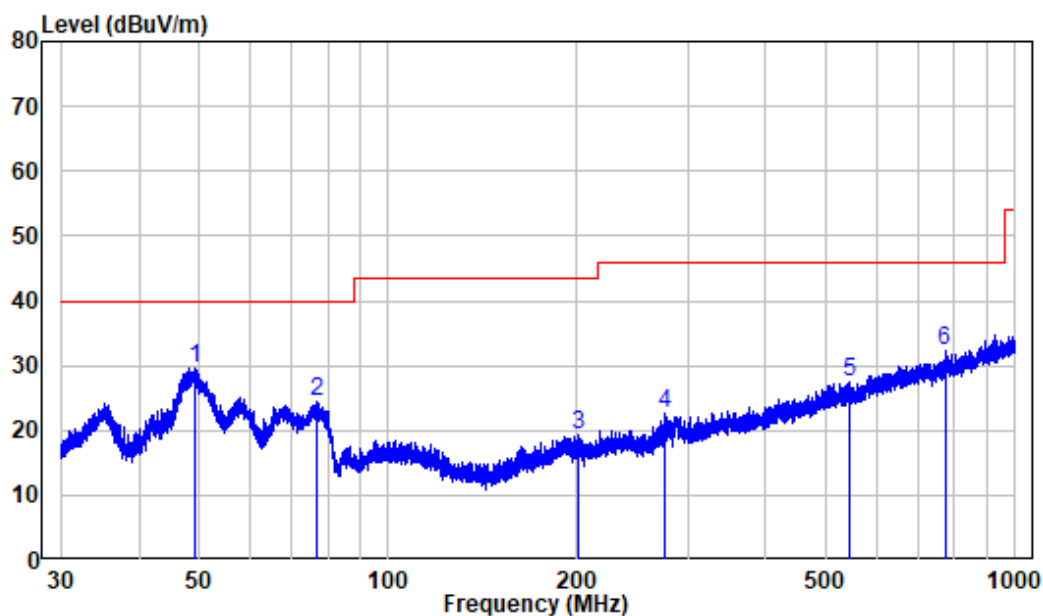

Site : chamber
Condition: 3m VERTICAL
Job No. : SZNS1220224-05893E-RF
Mode : BT Transmitting(ANT1+ANT2)

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	48.993	-9.96	39.59	29.63	40.00	-10.37	Peak
2	76.983	-16.51	40.95	24.44	40.00	-15.56	Peak
3	200.600	-11.45	30.83	19.38	43.50	-24.12	Peak
4	276.608	-9.79	32.36	22.57	46.00	-23.43	Peak
5	543.989	-4.00	31.52	27.52	46.00	-18.48	Peak
6	772.464	-0.07	32.27	32.20	46.00	-13.80	Peak

Above 1GHz**Ant1: worst case for $\pi/4$ -DQPSK**

Frequency (MHz)	Receiver		Turntable Angle	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/AV	Degree	Height	Polar				
				(m)	(H/V)				
Low Channel									
2310	51.7	PK	217	1.7	H	-7.23	44.47	74	-29.53
2310	51.01	PK	38	1.5	V	-7.23	43.78	74	-30.22
2390	53.52	PK	210	1.8	H	-7.21	46.31	74	-27.69
2390	51.9	PK	345	1.7	V	-7.21	44.69	74	-29.31
4804	48.75	PK	36	1.7	H	-3.52	45.23	74	-28.77
4804	47.09	PK	296	2.1	V	-3.52	43.57	74	-30.43
Middle Channel									
4882	47.15	PK	328	1.6	H	-3.37	43.78	74	-30.22
4882	45.99	PK	175	1.5	V	-3.37	42.62	74	-31.38
High Channel									
2483.5	54.05	PK	276	1.7	H	-7.2	46.85	74	-27.15
2483.5	52.84	PK	112	1.1	V	-7.2	45.64	74	-28.36
2500	51.85	PK	166	1.6	H	-7.18	44.67	74	-29.33
2500	50.6	PK	156	2.1	V	-7.18	43.42	74	-30.58
4960	46.6	PK	216	1.8	H	-3.01	43.59	74	-30.41
4960	46.13	PK	55	2.2	V	-3.01	43.12	74	-30.88

Ant2: worst case for $\pi/4$ -DQPSK

Frequency (MHz)	Receiver		Turntable Angle	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/AV	Degree	Height	Polar				
				(m)	(H/V)				
Low Channel									
2310	52.93	PK	247	1.5	H	-7.23	45.7	74	-28.3
2310	51.76	PK	256	2.0	V	-7.23	44.53	74	-29.47
2390	54.87	PK	125	1.3	H	-7.21	47.66	74	-26.34
2390	52.8	PK	164	1.8	V	-7.21	45.59	74	-28.41
4804	48.2	PK	281	1.2	H	-3.52	44.68	74	-29.32
4804	45.67	PK	296	1.9	V	-3.52	42.15	74	-31.85
Middle Channel									
4882	47.63	PK	89	1.5	H	-3.37	44.26	74	-29.74
4882	46.49	PK	202	1.6	V	-3.37	43.12	74	-30.88
High Channel									
2483.5	54.54	PK	149	1.4	H	-7.2	47.34	74	-26.66
2483.5	54.81	PK	340	1.3	V	-7.2	47.61	74	-26.39
2500	51.8	PK	238	1.9	H	-7.18	44.62	74	-29.38
2500	51.44	PK	157	1.5	V	-7.18	44.26	74	-29.74
4960	46.99	PK	90	1.6	H	-3.01	43.98	74	-30.02
4960	45.43	PK	41	2.0	V	-3.01	42.42	74	-31.58

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Absolute Level (Corrected Amplitude) = Factor + Reading

Margin = Absolute Level - Limit

The other spurious emission which is in the noise floor level was not recorded.


For above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.

Ant1:(worst case for $\pi/4$ -DQPSK):


1 GHz - 18 GHz: (Pre-Scan plots)

Low Channel

Horizontal

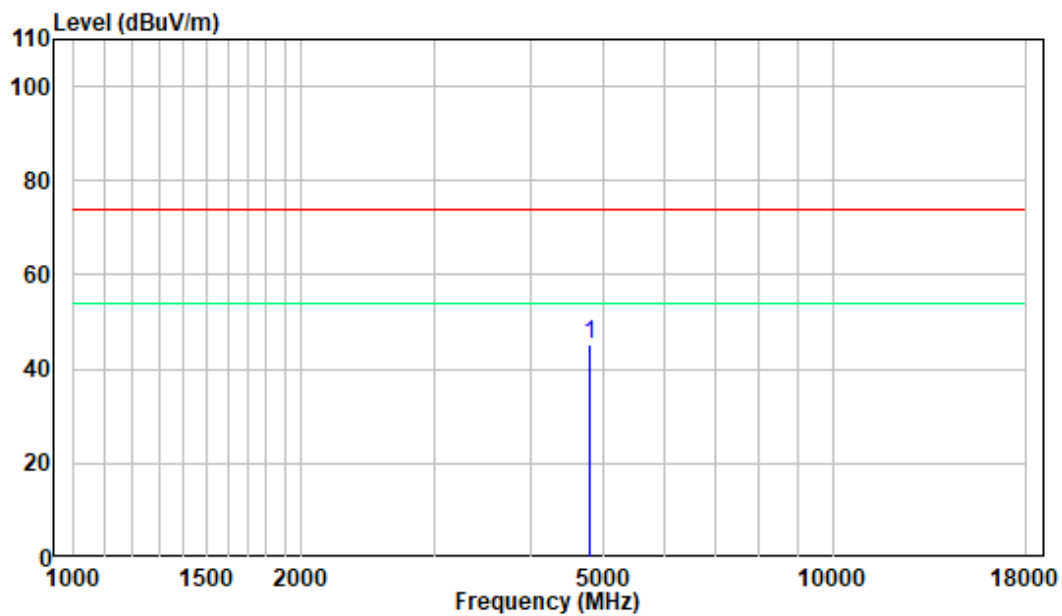


Vertical

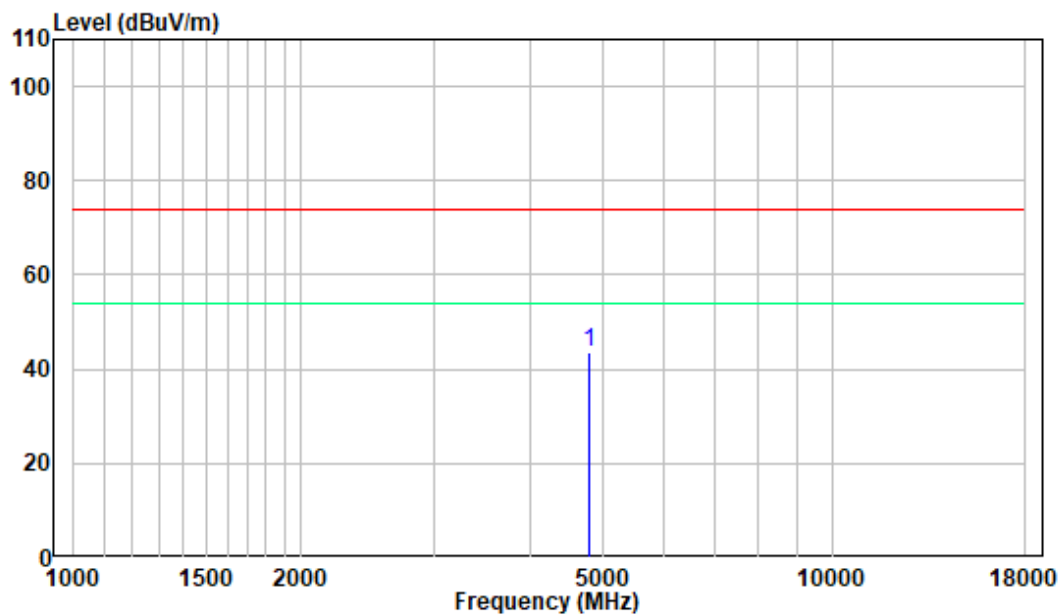


18-25GHz: (Pre-Scan plots)



Low Channel

Horizontal

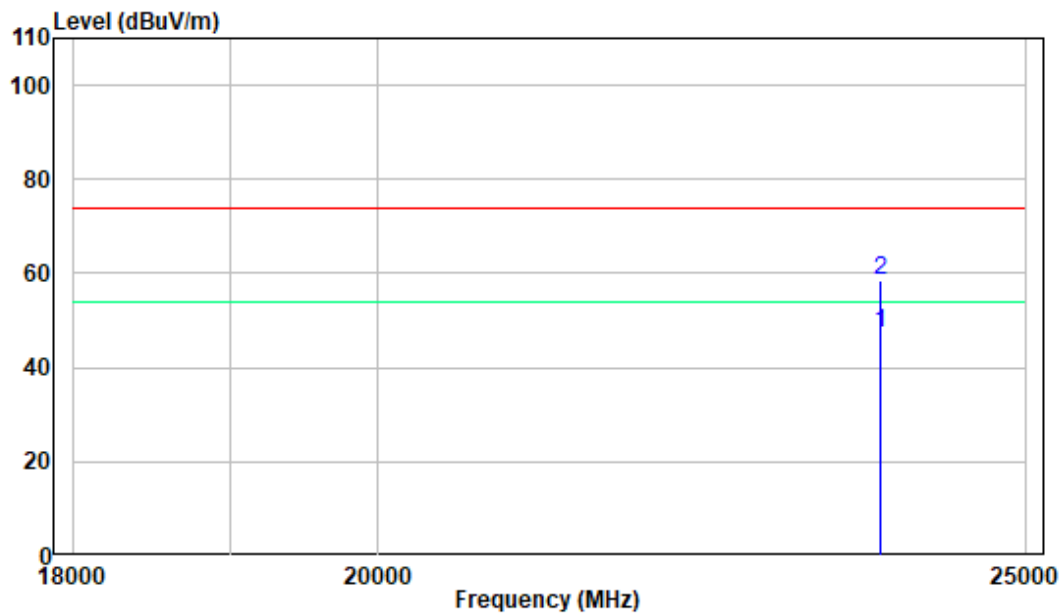

Vertical

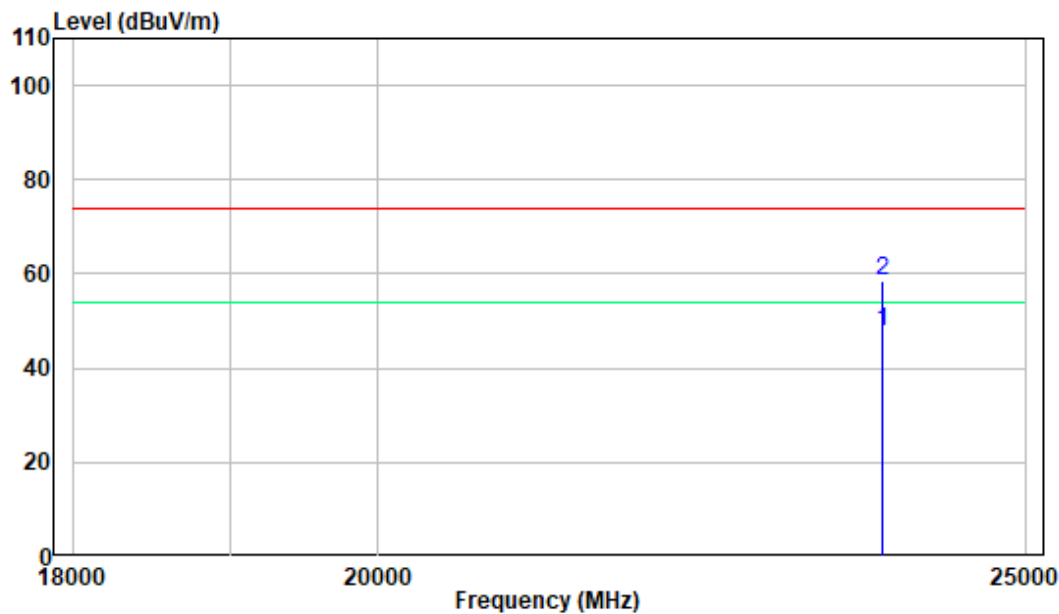


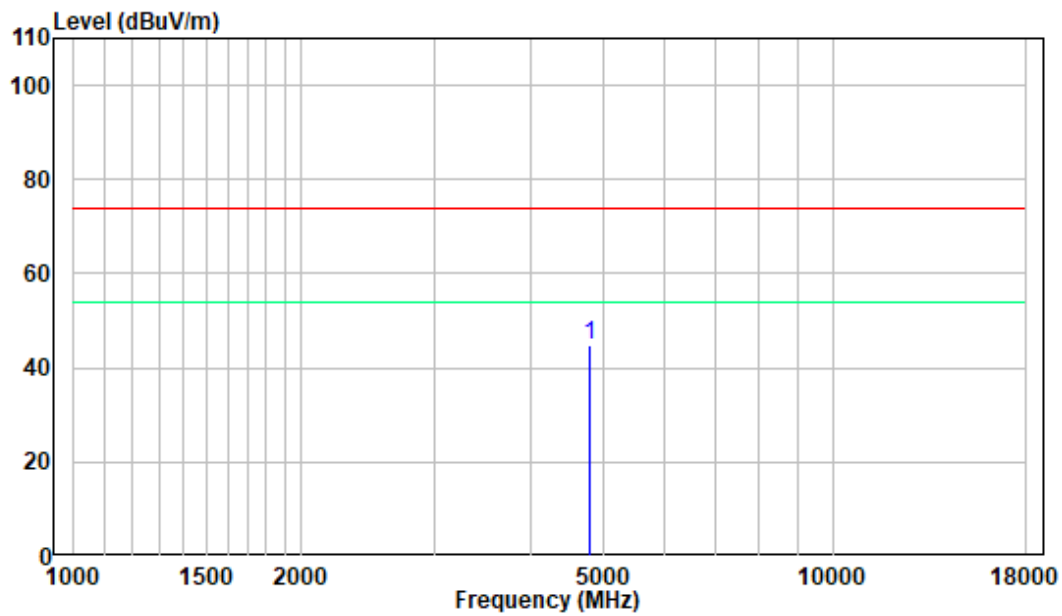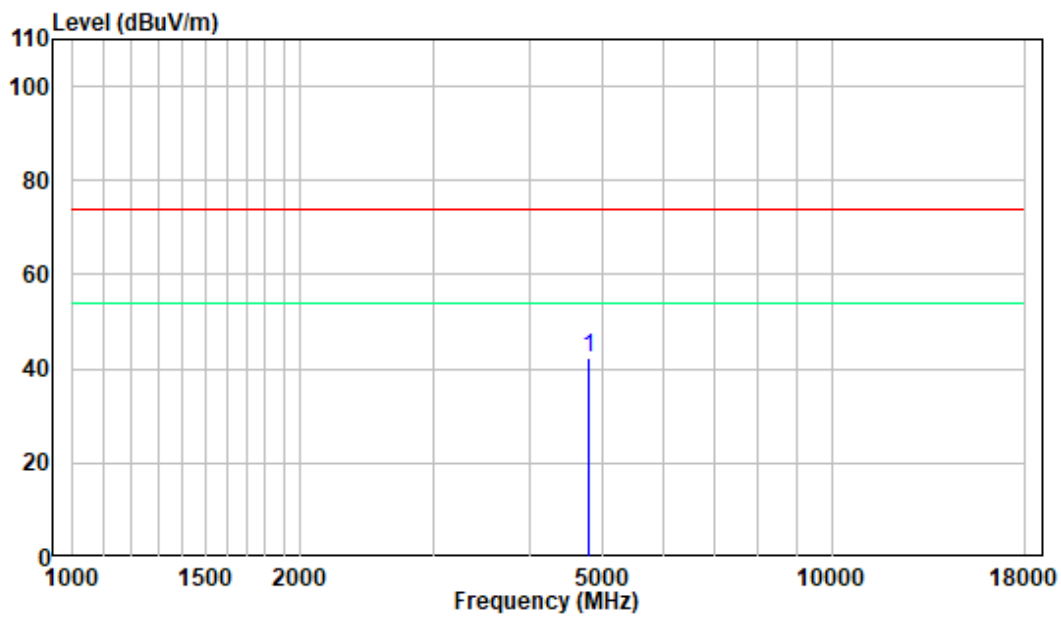Ant2 (worst case for $\pi/4$ -DQPSK):**1 GHz - 18 GHz:** (Pre-Scan plots)**Low Channel****Horizontal****Vertical**


18-25GHz: (Pre-Scan plots)

Low Channel

Horizontal

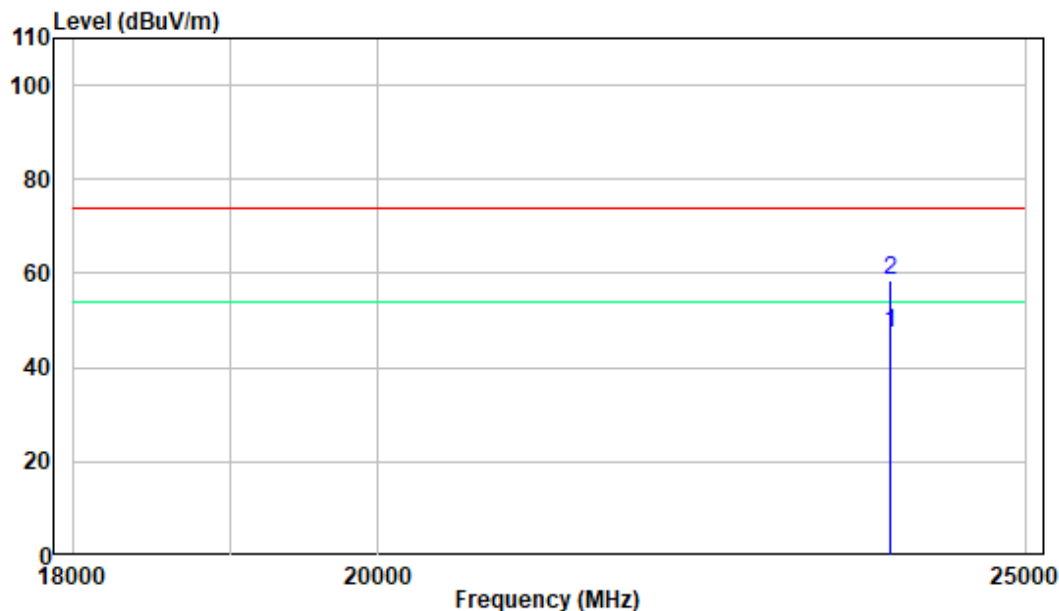

Vertical

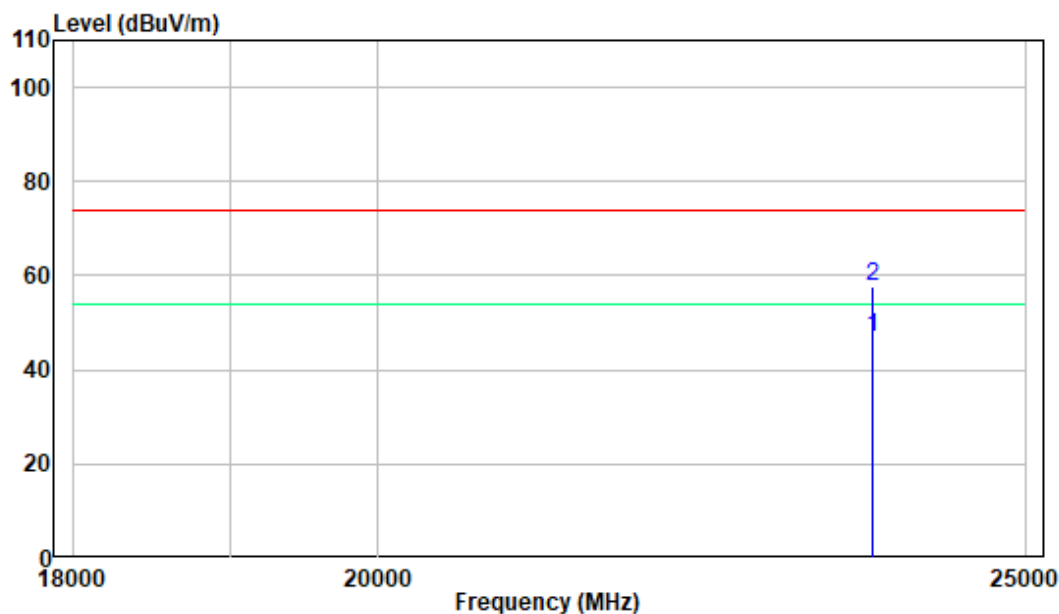


FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.



Test Data

Environmental Conditions

Temperature:	19-21°C
Relative Humidity:	48-52 %
ATM Pressure:	101.0 kPa

The testing was performed by Paul Liu from 2022-03-08 to 2022-03-22.

EUT operation mode: Transmitting

Test Result: Compliant.

Ant1:



TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1	≥ 0.592	PASS
2DH1	Ant1	Hop	1	≥ 0.856	PASS



Ant2:

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant2	Hop	1	≥ 0.592	PASS
2DH1	Ant2	Hop	1	≥ 0.856	PASS

Note: The limit = $(2/3) * 20\text{dB}$ bandwidth

Please refer to the below plots:

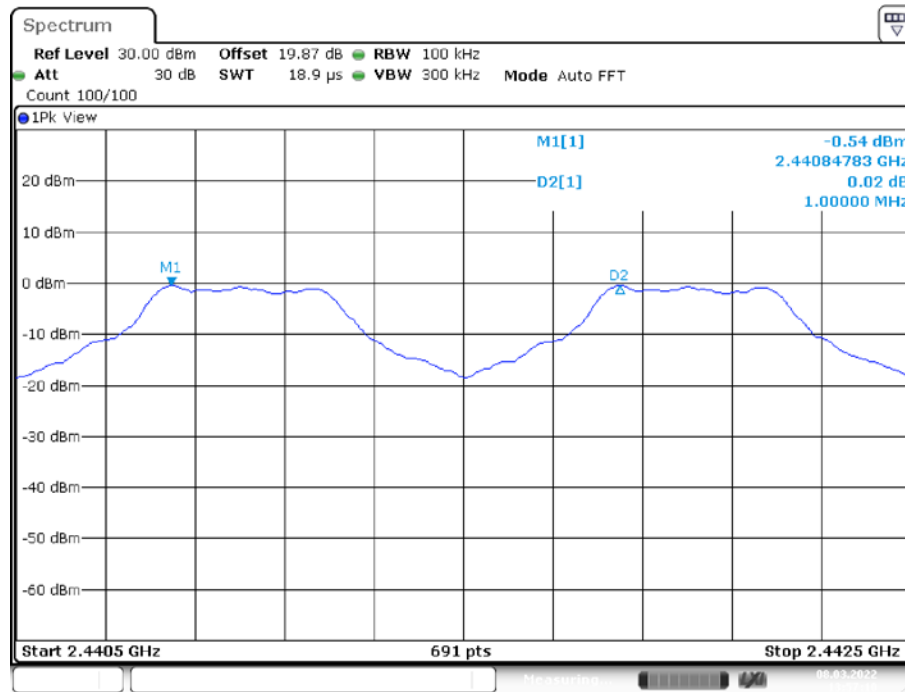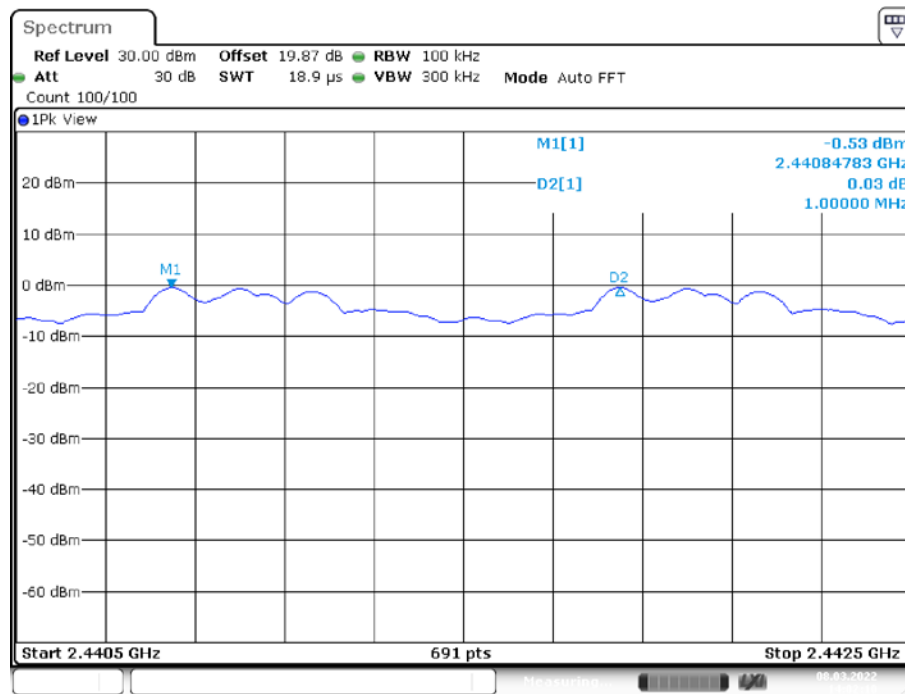Ant1:**DH1_Ant1_Hop****2DH1_Ant1_Hop**

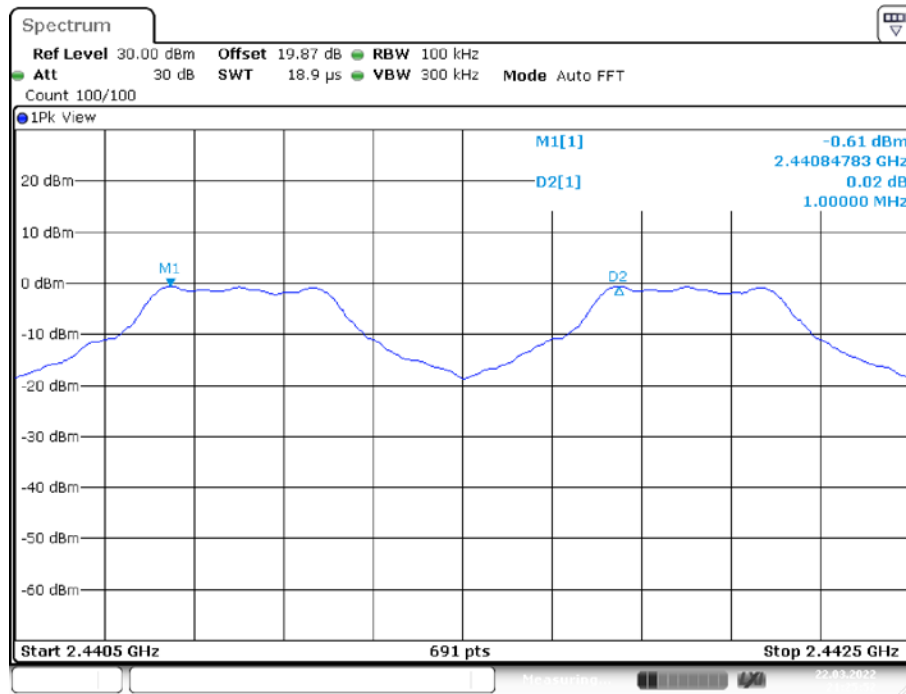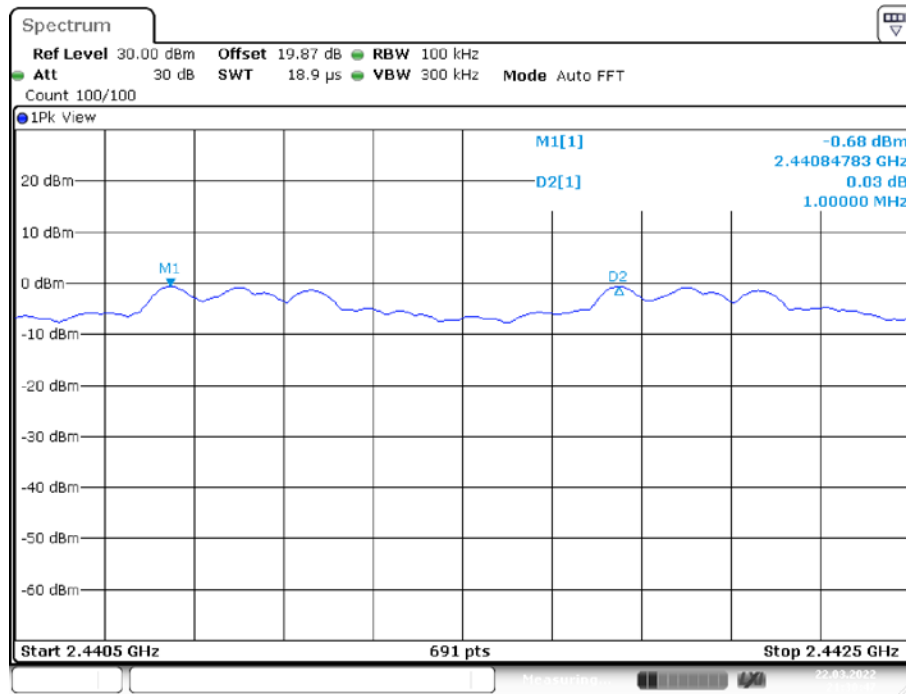Ant2:**DH1_Ant2_Hop****2DH1_Ant2_Hop**

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



Test Data**Environmental Conditions**

Temperature:	19-21°C
Relative Humidity:	48-52 %
ATM Pressure:	101.0 kPa

The testing was performed by Paul Liu from 2022-03-08 to 2022-03-22.

EUT operation mode: Transmitting

Test Result: Compliant.

20 dB EMISSION BANDWIDTH**Ant1:**

TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.885	2401.556	2402.441	---	PASS
		2441	0.888	2440.556	2441.444	---	PASS
		2480	0.888	2479.556	2480.444	---	PASS
2DH1	Ant1	2402	1.284	2401.346	2402.630	---	PASS
		2441	1.284	2440.346	2441.630	---	PASS
		2480	1.284	2479.346	2480.630	---	PASS

Ant2:

TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH1	Ant2	2402	0.888	2401.556	2402.444	---	PASS
		2441	0.888	2440.556	2441.444	---	PASS
		2480	0.888	2479.556	2480.444	---	PASS
2DH1	Ant2	2402	1.284	2401.346	2402.630	---	PASS
		2441	1.284	2440.346	2441.630	---	PASS
		2480	1.284	2479.346	2480.630	---	PASS


99% OCCUPIED BANDWIDTH**Ant1:**

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.836	2401.583	2402.420	---	PASS
		2441	0.839	2440.583	2441.423	---	PASS
		2480	0.842	2479.583	2480.426	---	PASS
2DH1	Ant1	2402	1.181	2401.407	2402.587	---	PASS
		2441	1.181	2440.407	2441.587	---	PASS
		2480	1.181	2479.407	2480.587	---	PASS


Ant2:

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH1	Ant2	2402	0.836	2401.583	2402.420	---	PASS
		2441	0.839	2440.583	2441.423	---	PASS
		2480	0.839	2479.583	2480.423	---	PASS
2DH1	Ant2	2402	1.178	2401.407	2402.584	---	PASS
		2441	1.181	2440.407	2441.587	---	PASS
		2480	1.181	2479.407	2480.587	---	PASS

Please refer to the below plots:

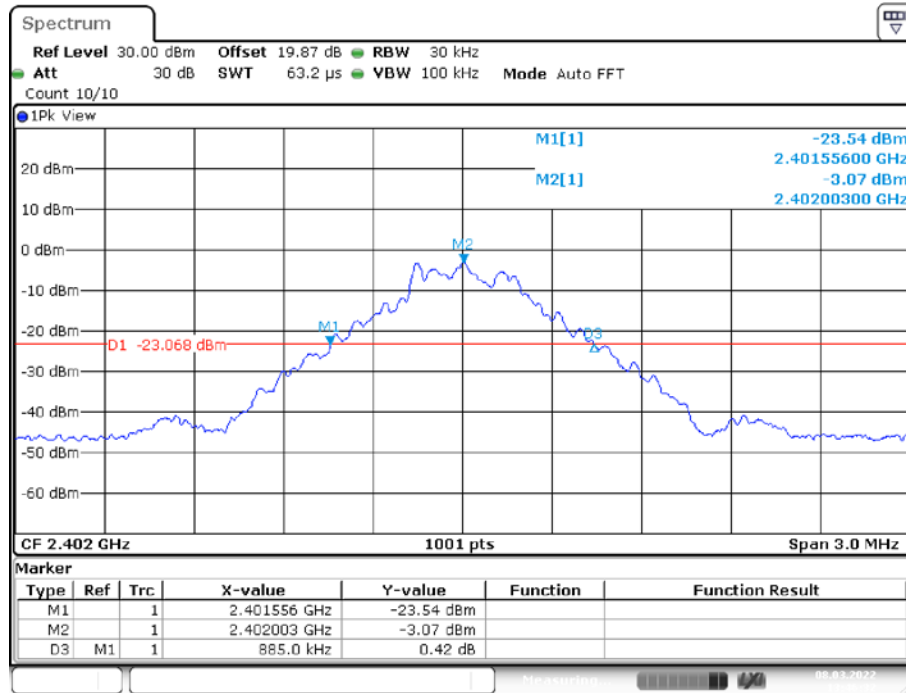
20 dB EMISSION BANDWIDTH**Ant1:****DH1_Ant1_2402**

Date: 8.MAR.2022 13:46:32

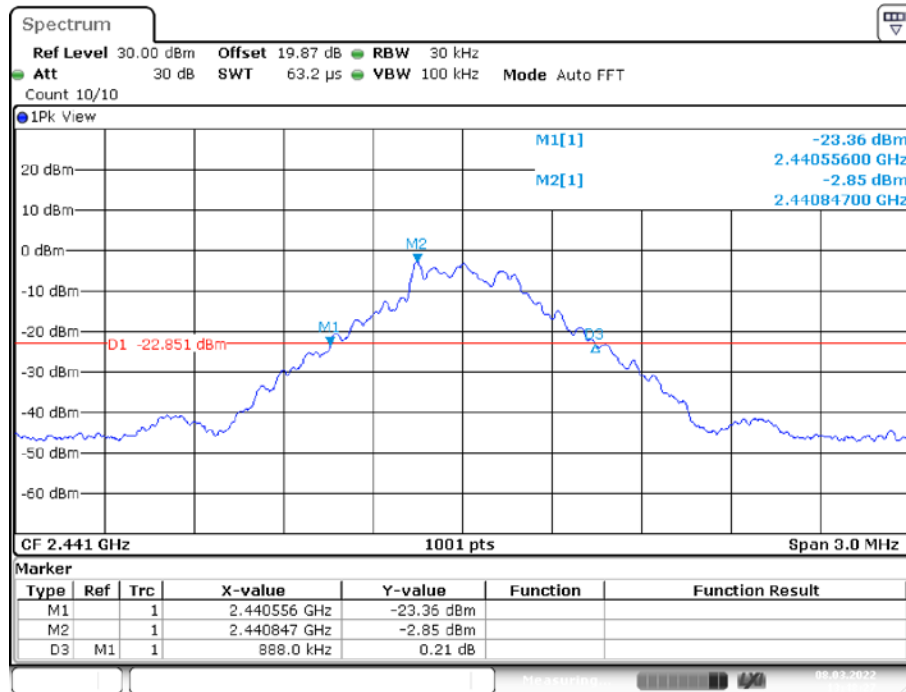DH1_Ant1_2441


Date: 8.MAR.2022 13:48:27

DH1_Ant1_2480

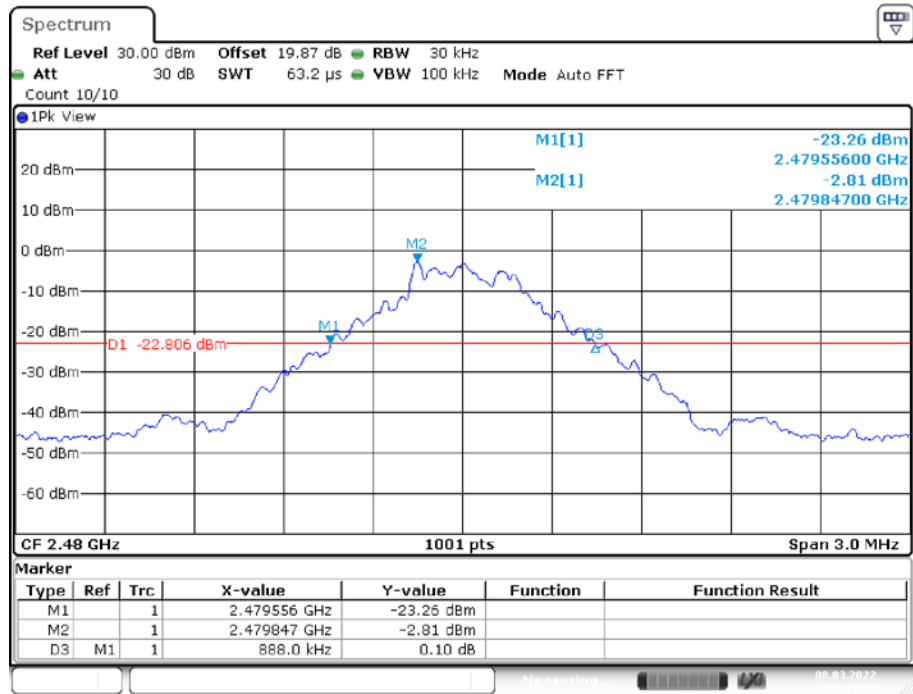


Date: 8.MAR.2022 13:49:24

DH1_Ant1_2402

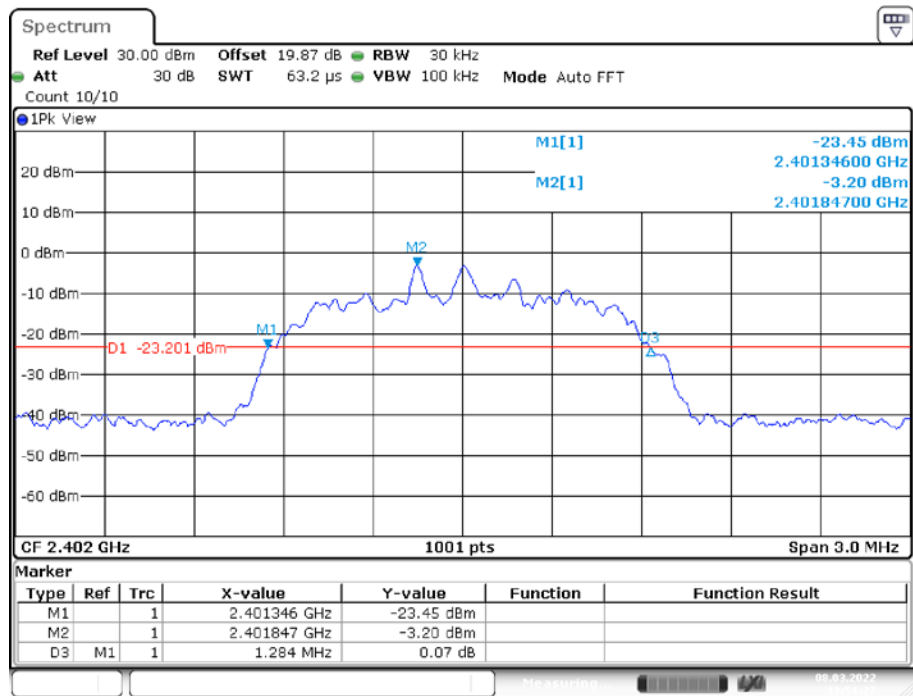


Date: 8.MAR.2022 13:51:27

DH1_Ant1_2441

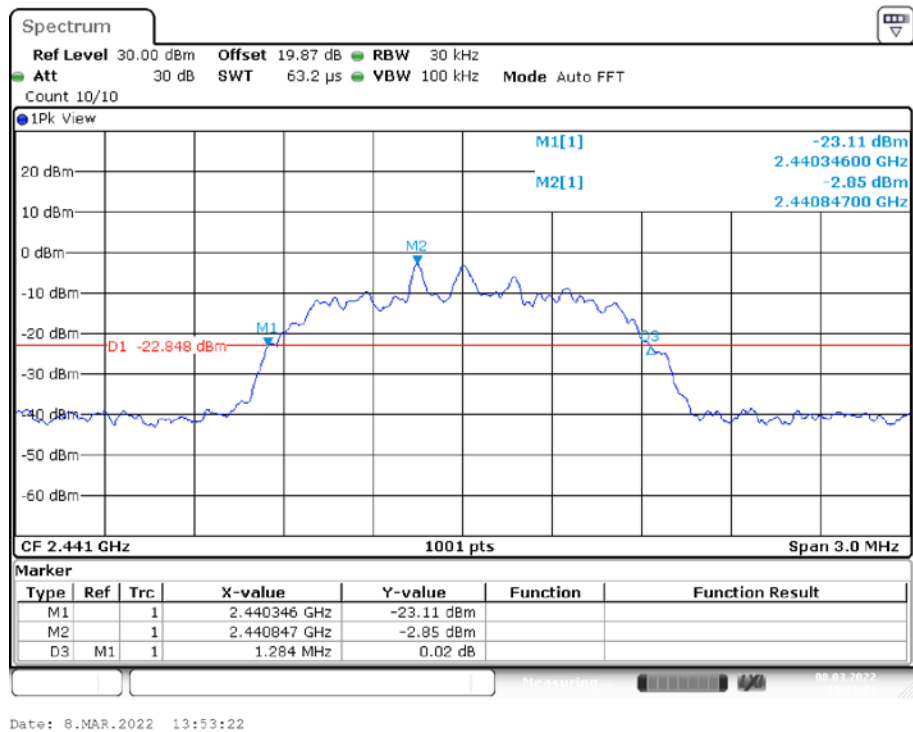


DH1_Ant1_2480

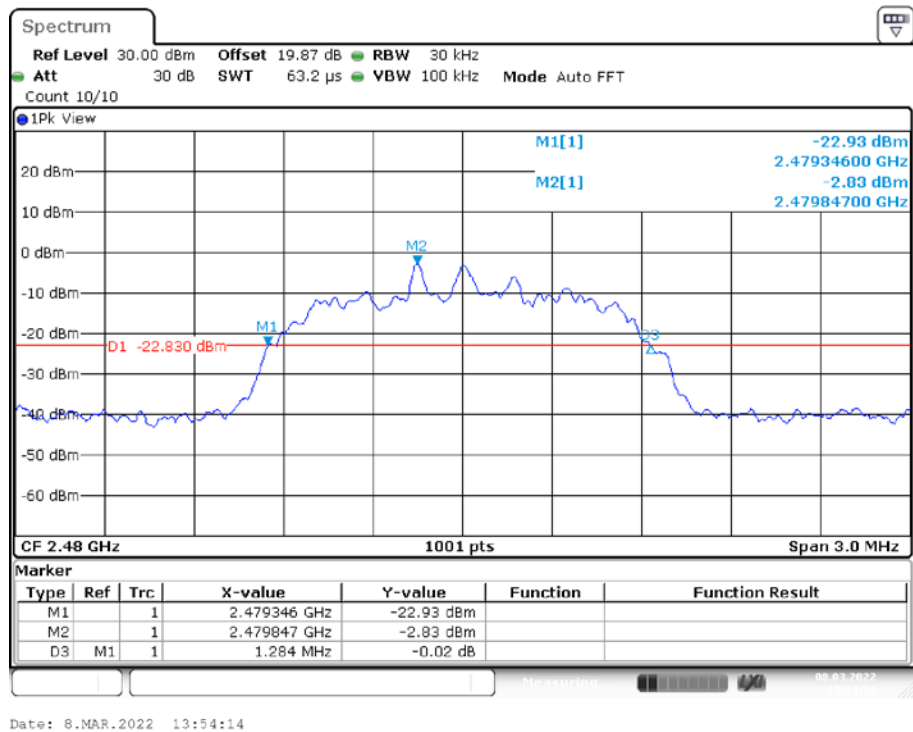


Ant2:

DH1_Ant2_2402

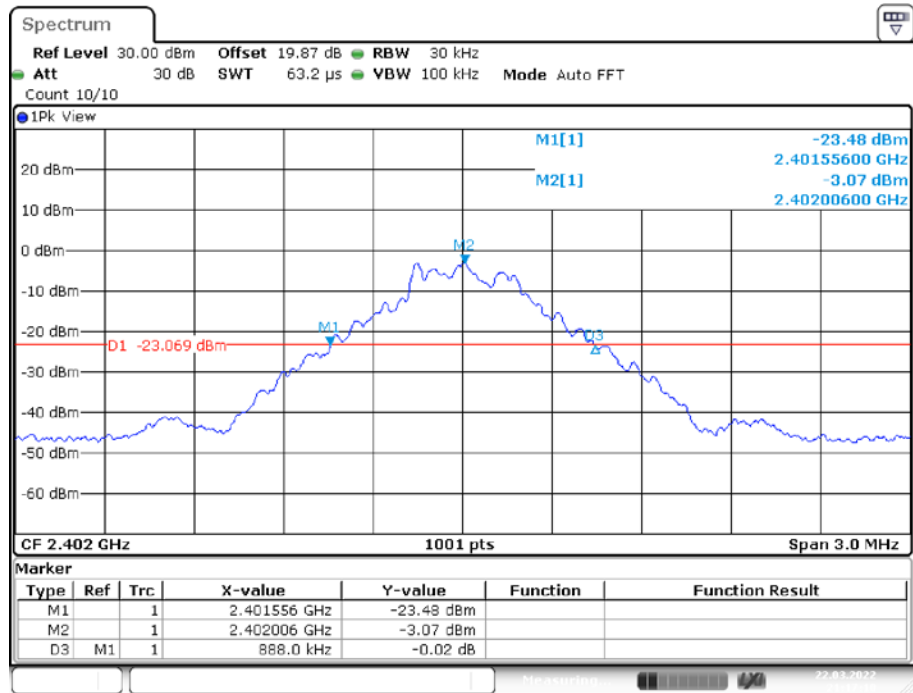


Date: 22.MAR.2022 21:17:10

DH1_Ant2_2441

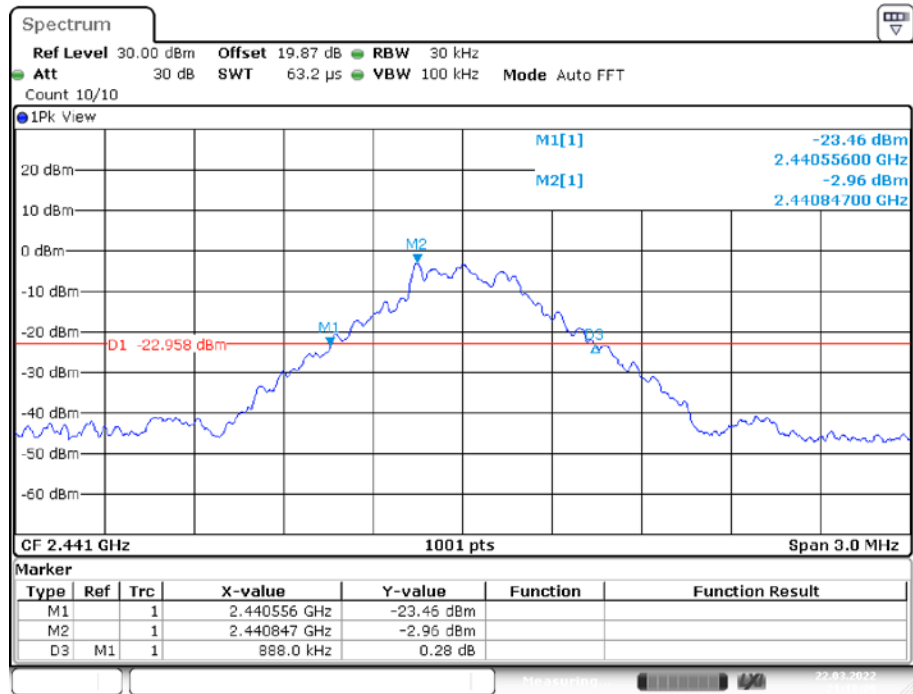


Date: 22.MAR.2022 21:18:29


DH1_Ant2_2480

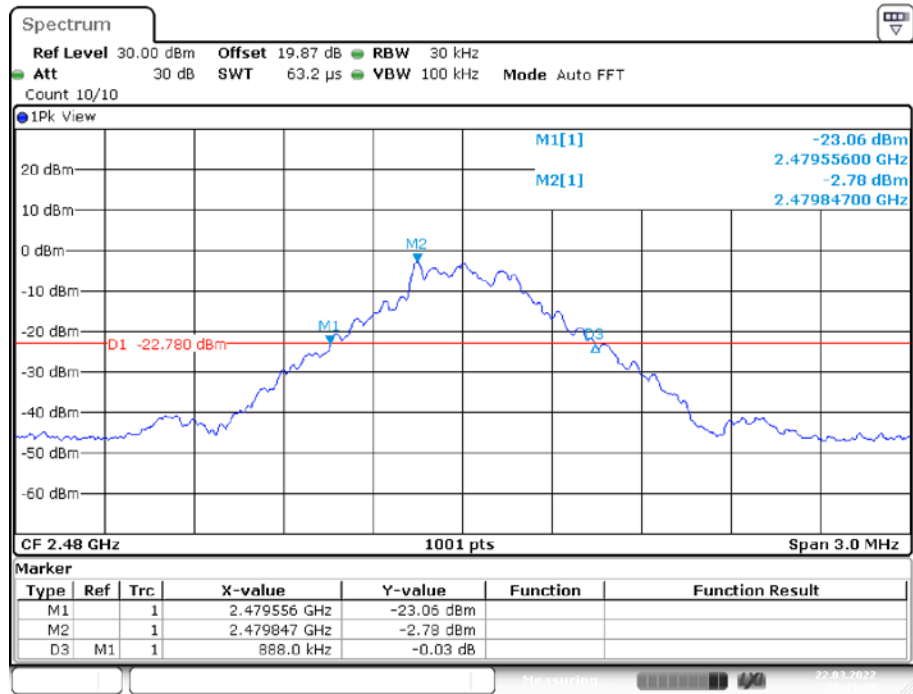


2DH1_Ant2_2402


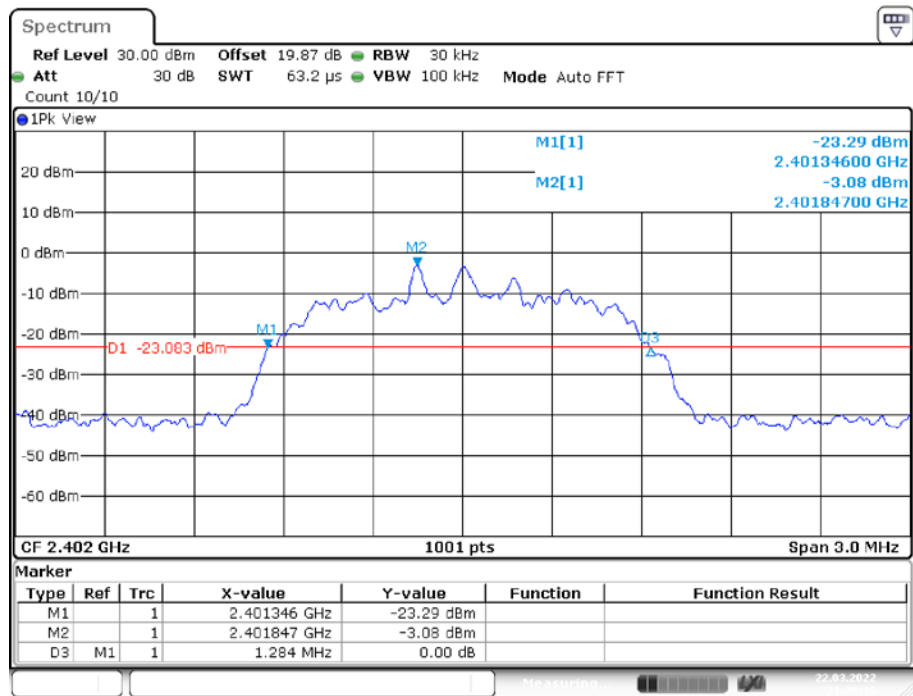


2DH1_Ant2_2441

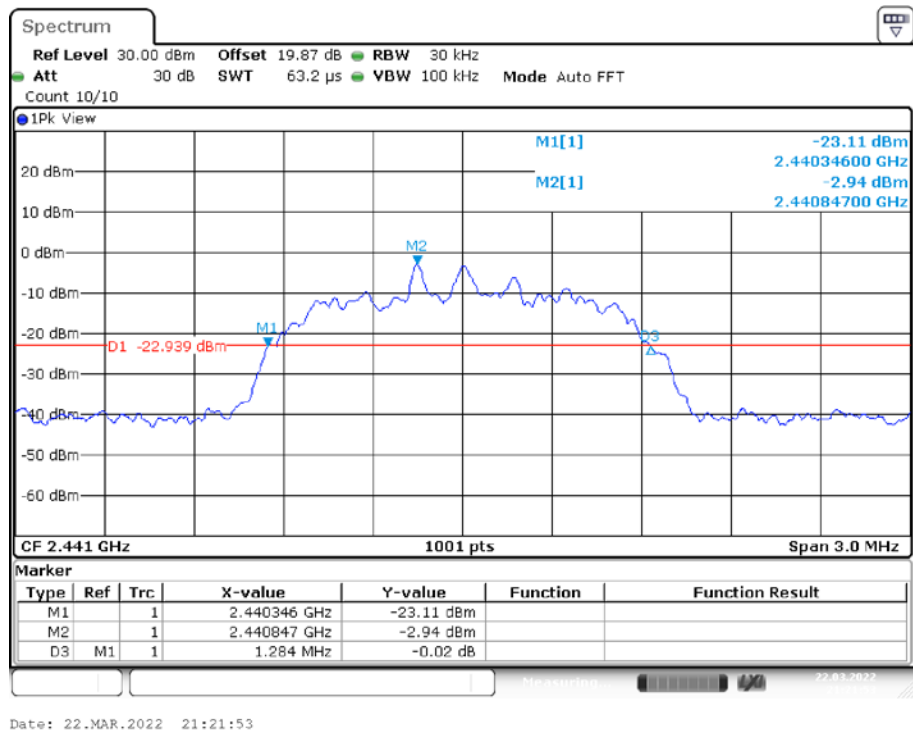


2DH1_Ant2_2480

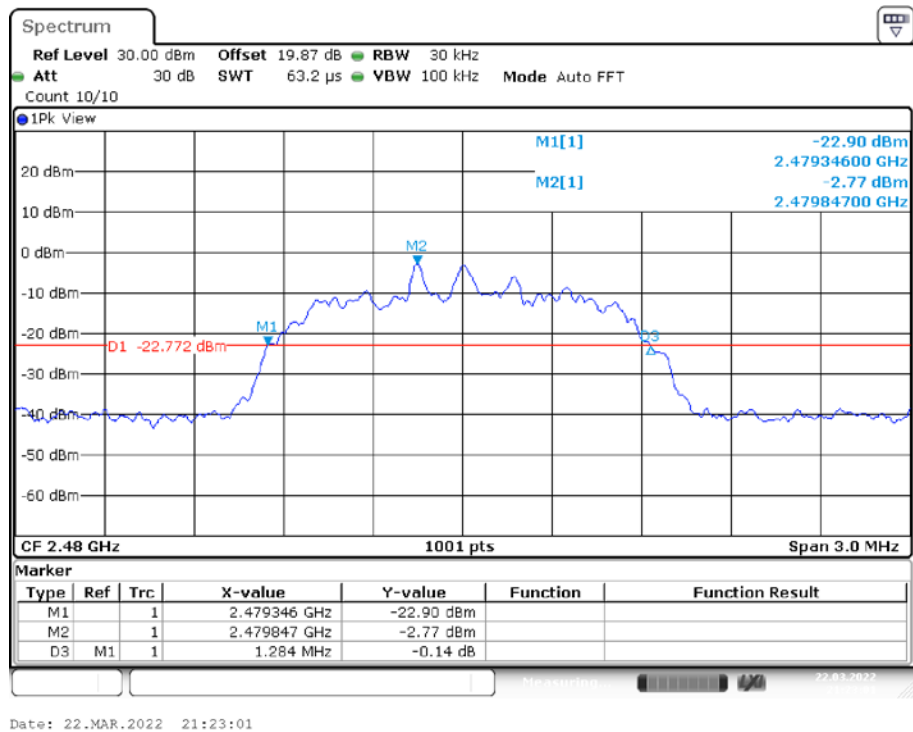

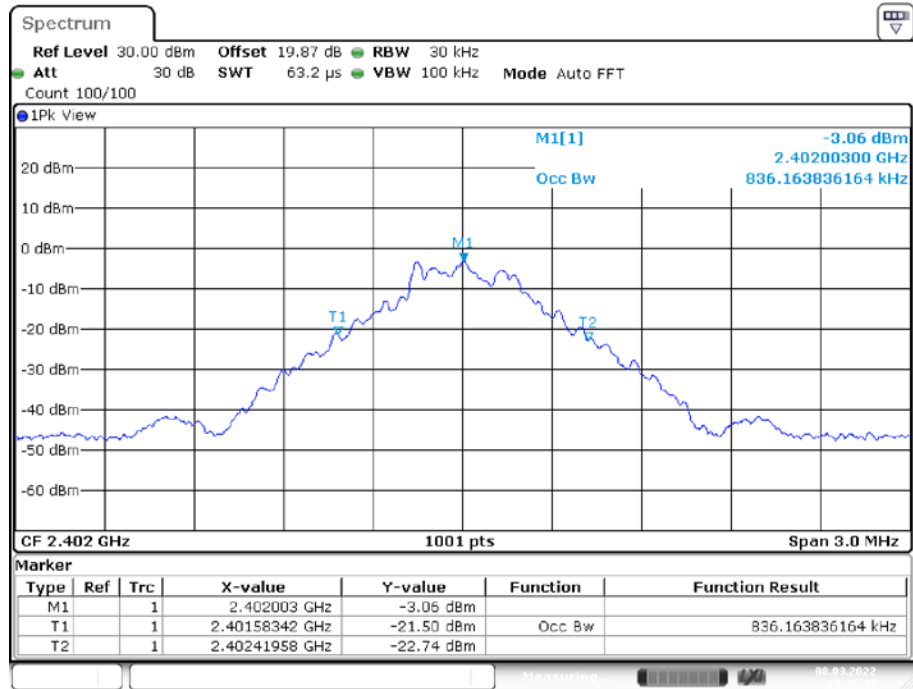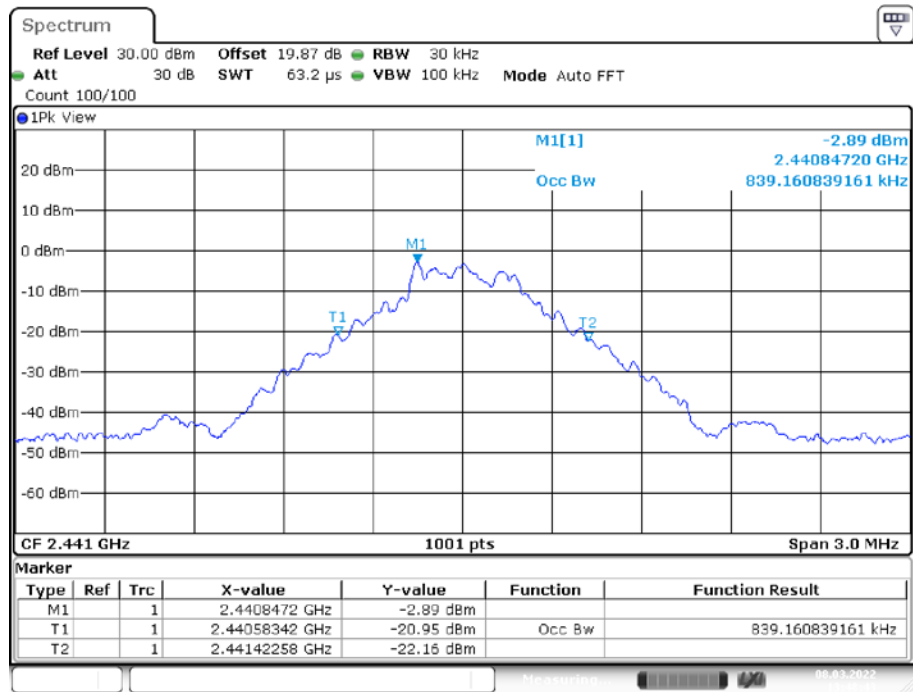
99% OCCUPIED BANDWIDTH**Ant1:****DH1_Ant1_2402****DH1_Ant1_2441**

DH1_Ant1_2480

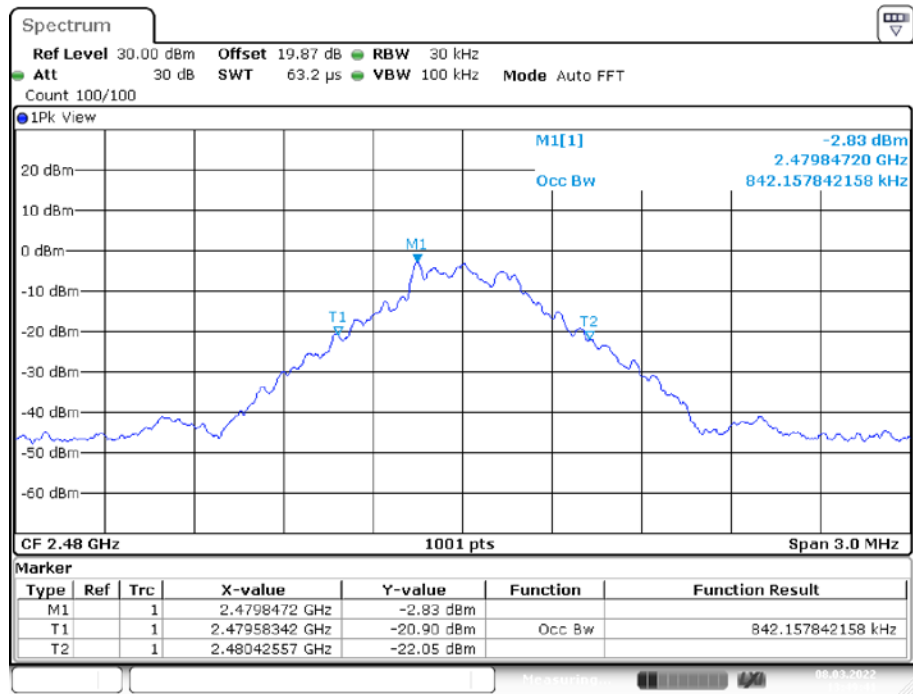


Date: 8.MAR.2022 13:49:41

2DH1_Ant1_2402

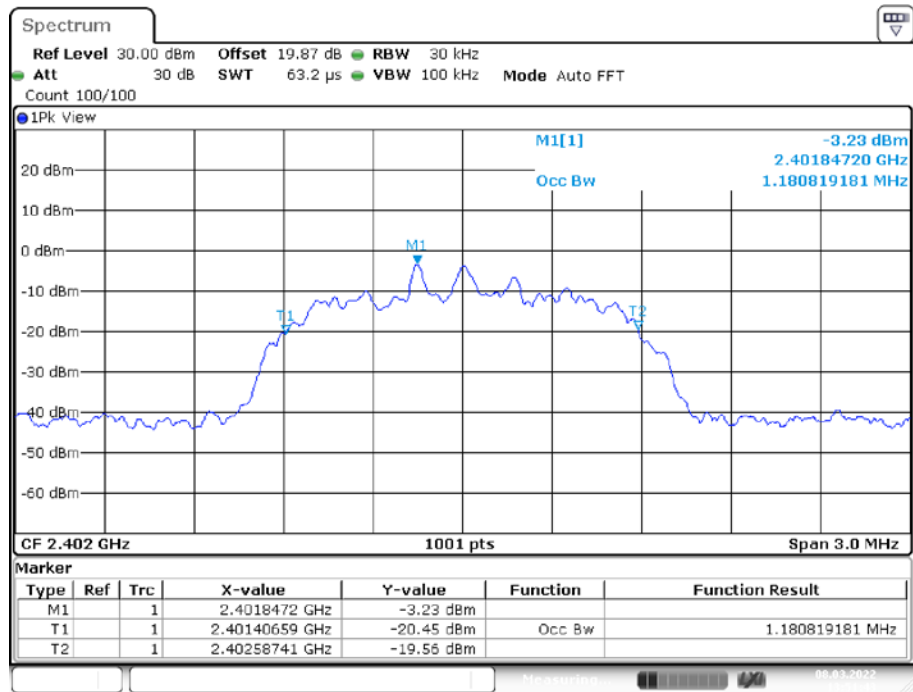


Date: 8.MAR.2022 13:51:44

2DH1_Ant1_2441

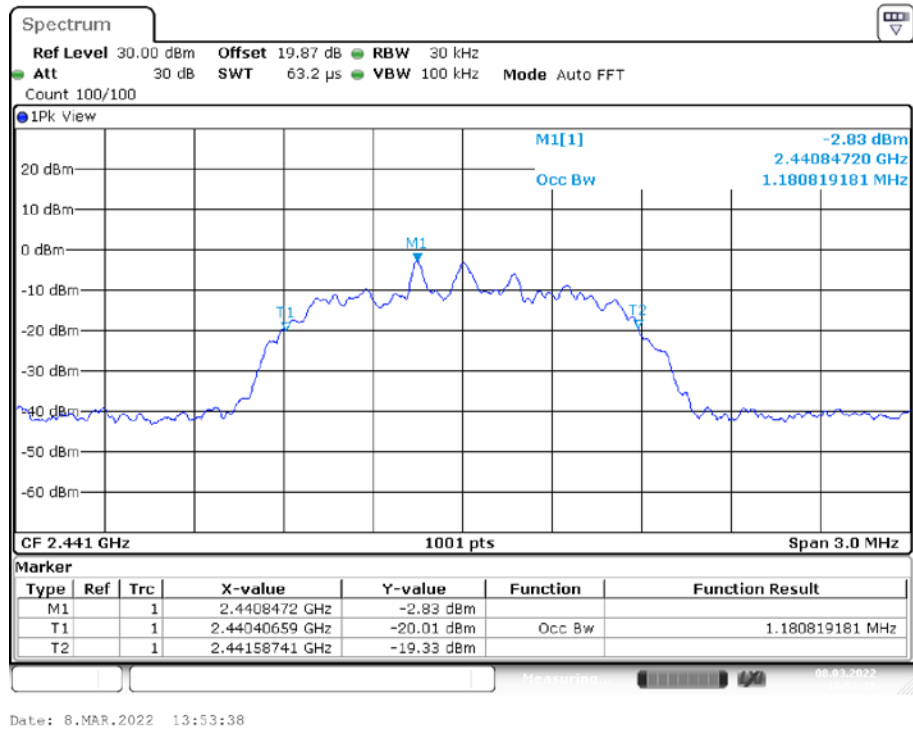


2DH1_Ant1_2480

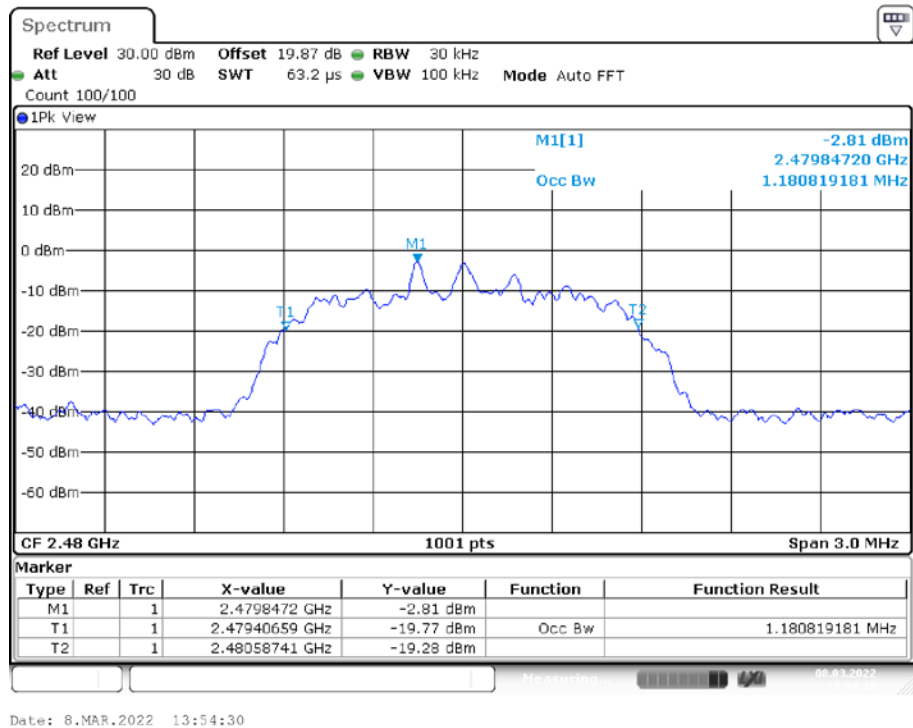


Ant2:

DH1_Ant2_2402

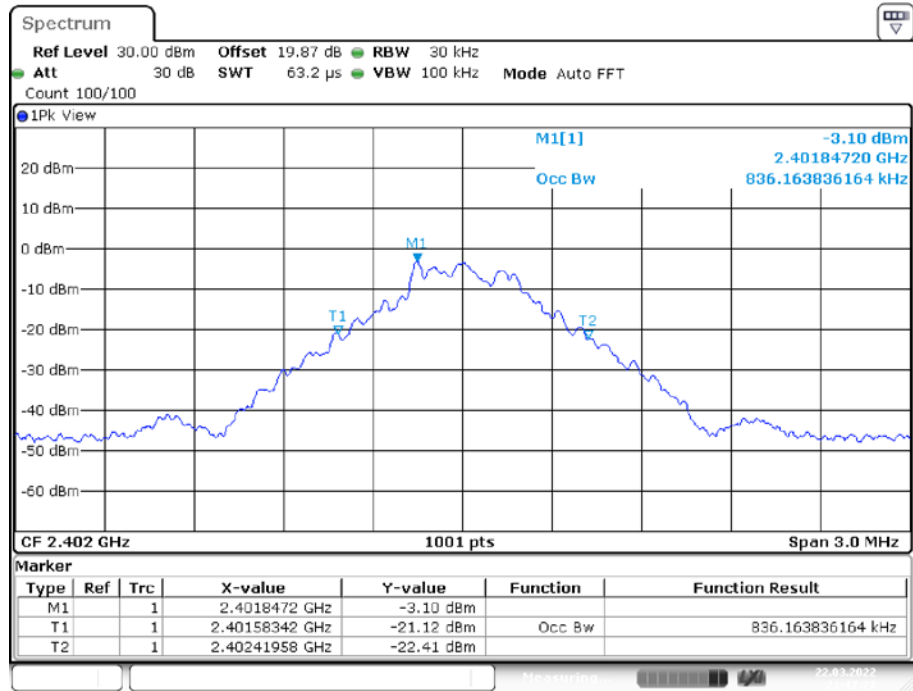


Date: 22.MAR.2022 21:17:27

DH1_Ant2_2441

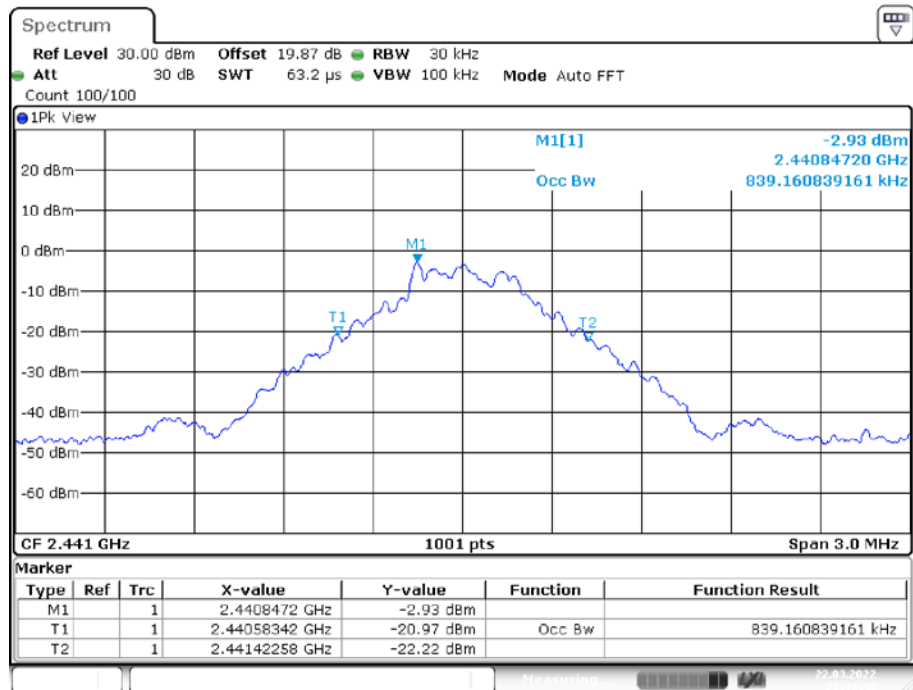


Date: 22.MAR.2022 21:18:46


DH1_Ant2_2480

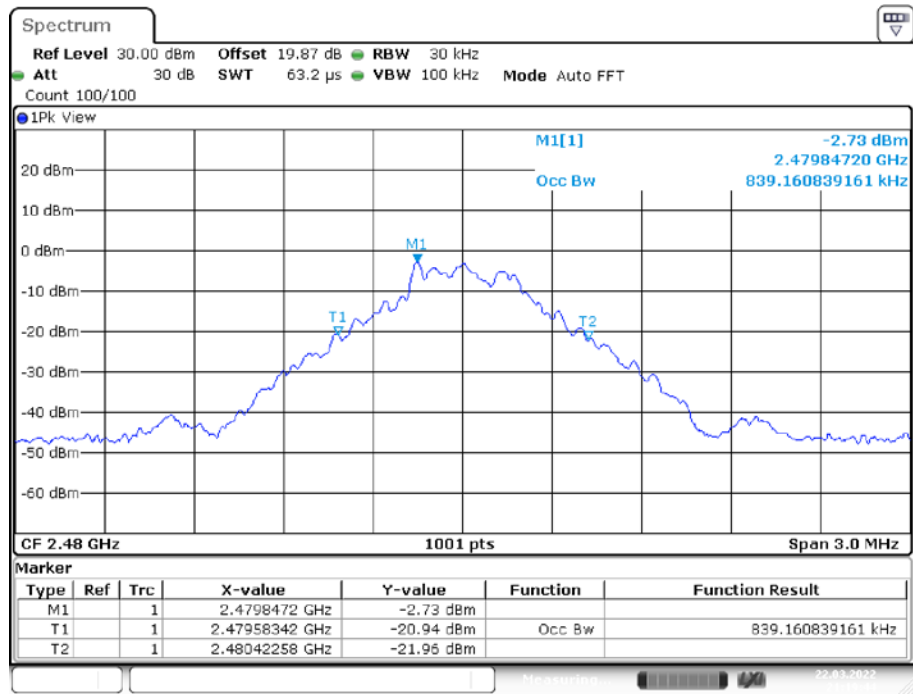

2DH1_Ant2_2402

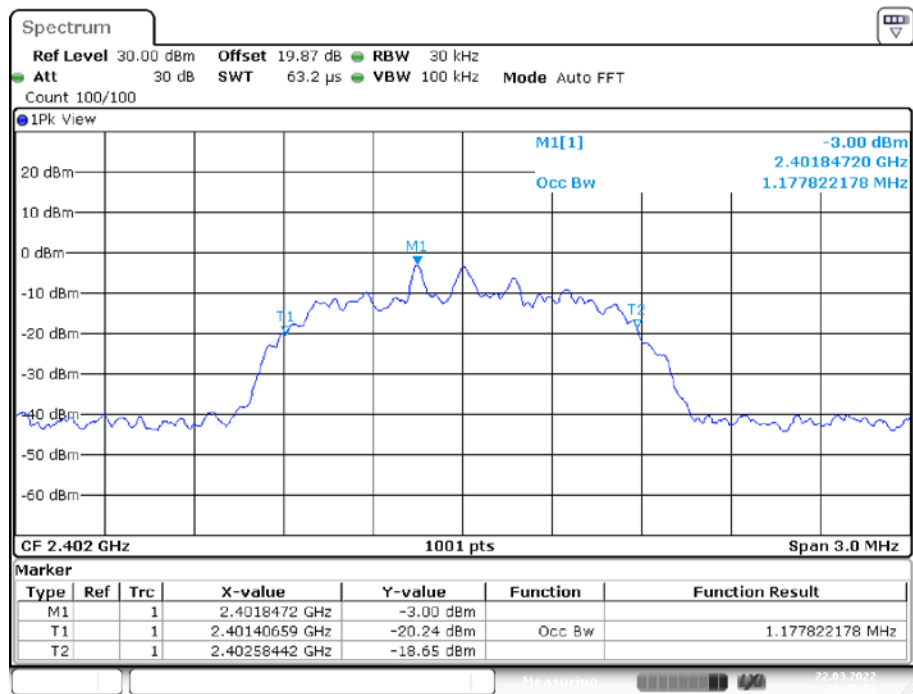


2DH1_Ant2_2441

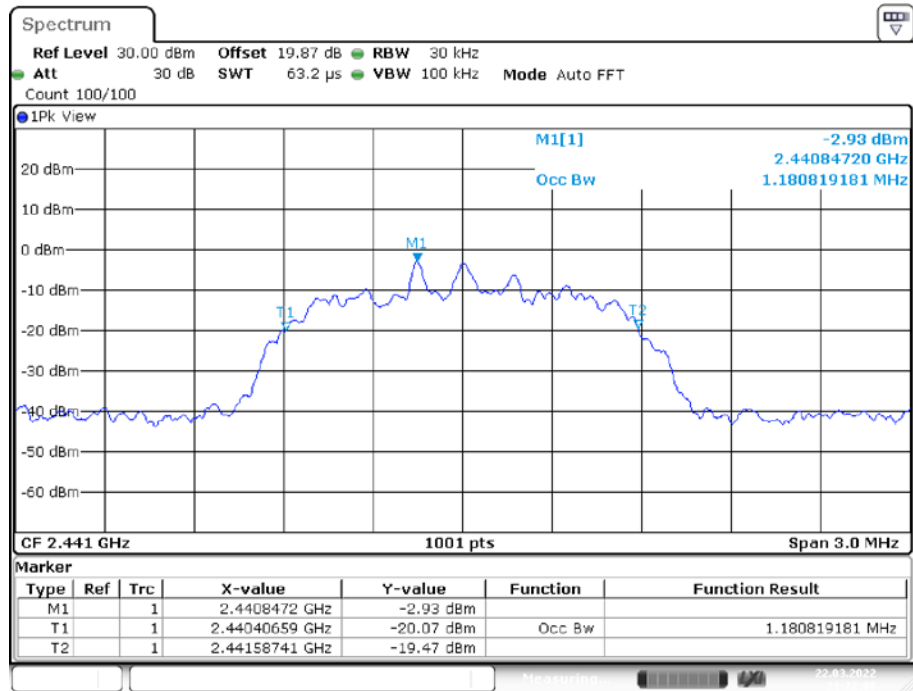

Date: 22.MAR.2022 21:22:09

2DH1_Ant2_2480

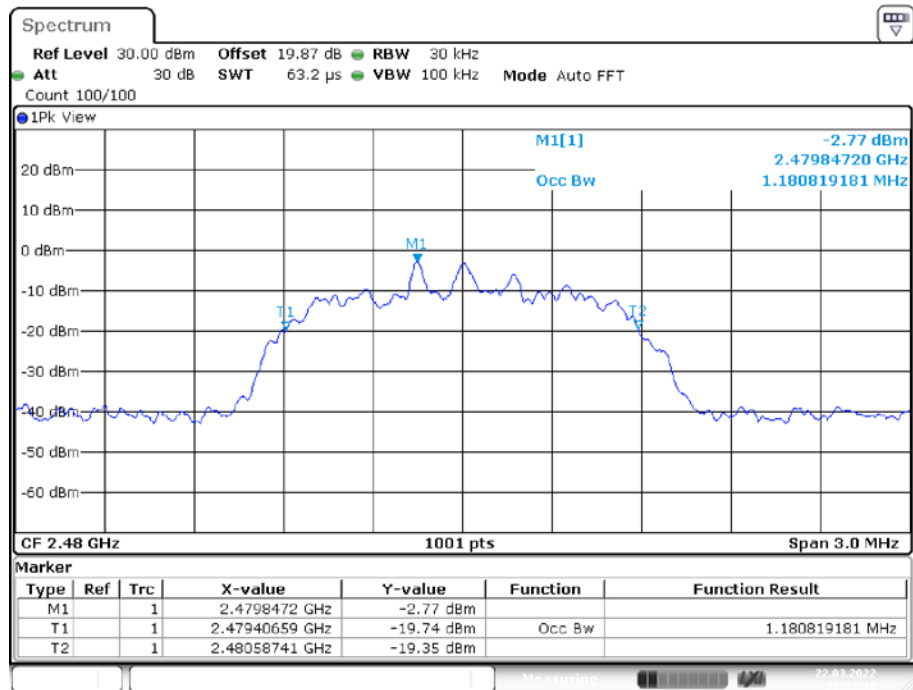

Date: 22.MAR.2022 21:23:18


FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.



Test Data

Environmental Conditions

Temperature:	19-21℃
Relative Humidity:	48-52 %
ATM Pressure:	101.0 kPa

The testing was performed by Paul Liu from 2022-03-08 to 2022-03-22.

EUT operation mode: Transmitting

Test Result: Compliant.


Ant1:

TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH1	Ant1	Hop	79	>=15	PASS
2DH1	Ant1	Hop	79	>=15	PASS


Ant2:

TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH1	Ant2	Hop	79	>=15	PASS
2DH1	Ant2	Hop	79	>=15	PASS


Please refer to the below plots:

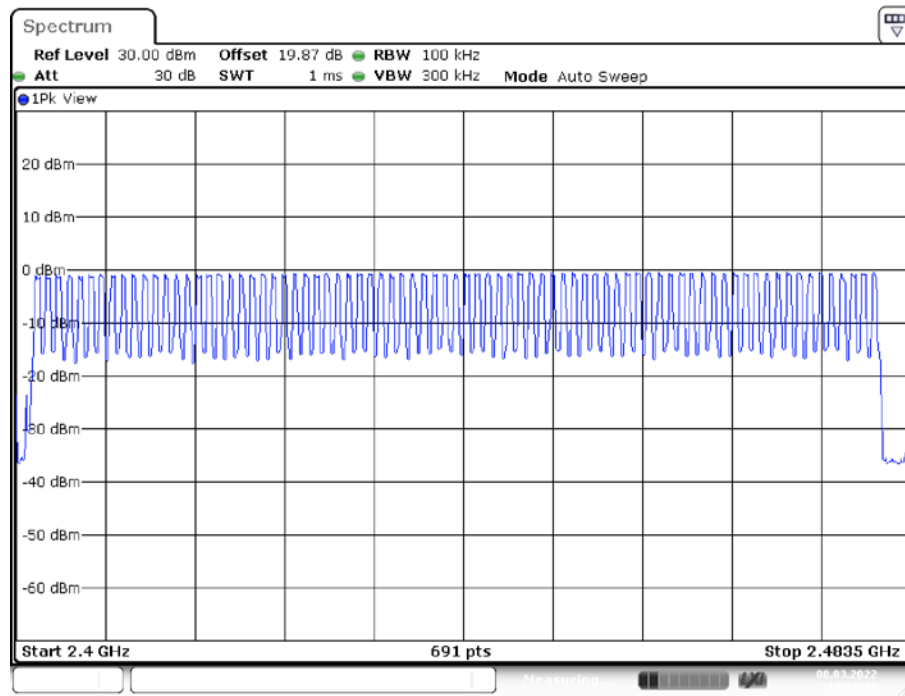Ant1:**DH1_Ant1_Hop**


Date: 8.MAR.2022 13:58:24

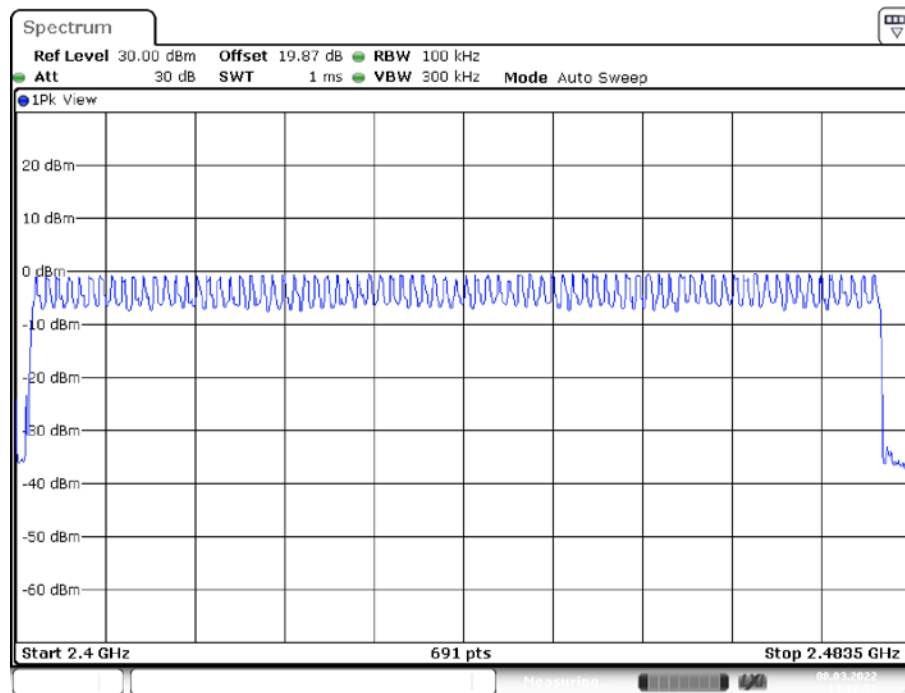2DH1_Ant1_Hop

Date: 8.MAR.2022 14:02:50

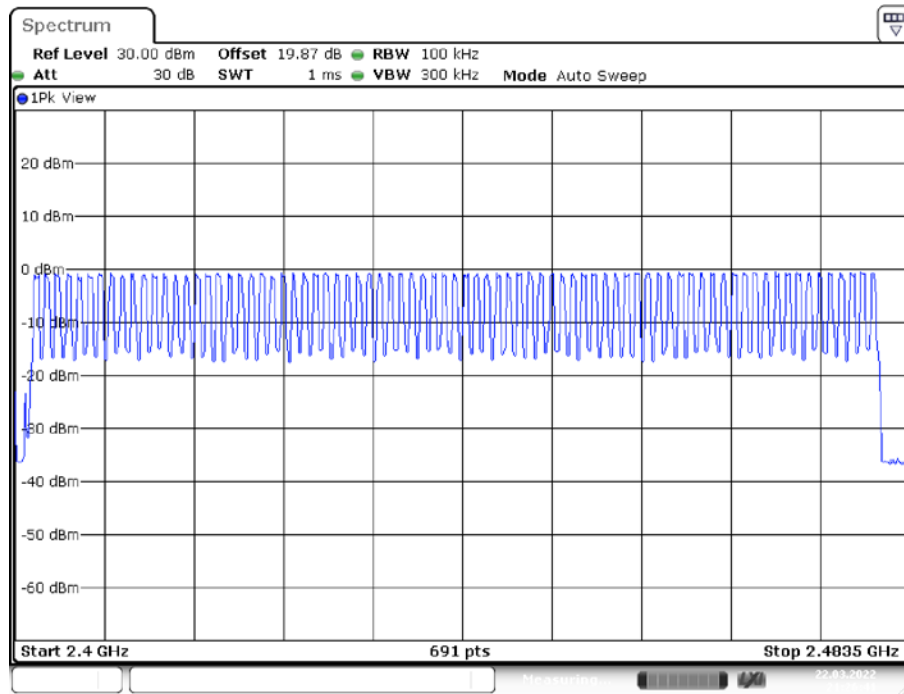Ant2:**DH1_Ant2_Hop**

Date: 22.MAR.2022 21:26:41

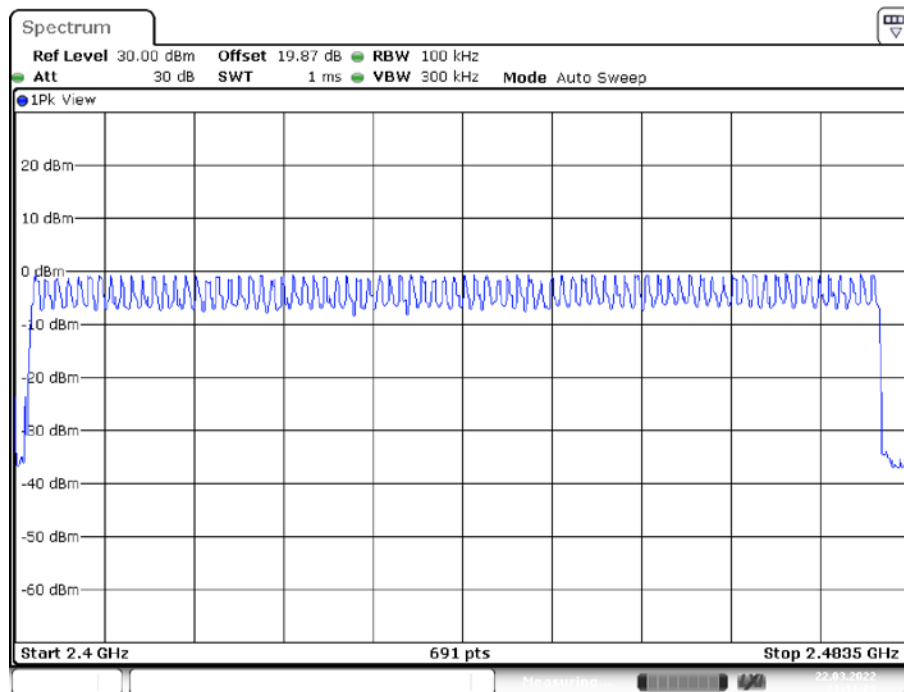2DH1_Ant2_Hop

Date: 22.MAR.2022 21:31:23


FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses



Test Data

Environmental Conditions

Temperature:	19-21℃
Relative Humidity:	48-52 %
ATM Pressure:	101.0 kPa

The testing was performed by Paul Liu from 2022-03-08 to 2022-03-22.

EUT operation mode: Transmitting

Test Result: Compliant.

Ant1:

TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.37	330	0.123	≤ 0.4	PASS
DH3	Ant1	Hop	1.62	180	0.292	≤ 0.4	PASS
DH5	Ant1	Hop	2.86	130	0.372	≤ 0.4	PASS
2DH1	Ant1	Hop	0.38	320	0.123	≤ 0.4	PASS
2DH3	Ant1	Hop	1.63	180	0.293	≤ 0.4	PASS
2DH5	Ant1	Hop	2.87	120	0.344	≤ 0.4	PASS

Ant2:

TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant2	Hop	0.37	320	0.119	<=0.4	PASS
DH3	Ant2	Hop	1.62	120	0.195	<=0.4	PASS
DH5	Ant2	Hop	2.86	100	0.286	<=0.4	PASS
2DH1	Ant2	Hop	0.38	330	0.126	<=0.4	PASS
2DH3	Ant2	Hop	1.63	140	0.228	<=0.4	PASS
2DH5	Ant2	Hop	2.87	100	0.287	<=0.4	PASS


Note 1: A period time= $0.4 \times 79 = 31.6(s)$, Result=Burst Width*Total Hops

Note 2: Total Hops =Hopping Number in $3.16s \times 10$


Note 3: Hoping Number in 3.16s=Total of highest signals in 3.16s (Second high signals were other channel)

Ant1: GFSK

DH1_Ant1_Hop


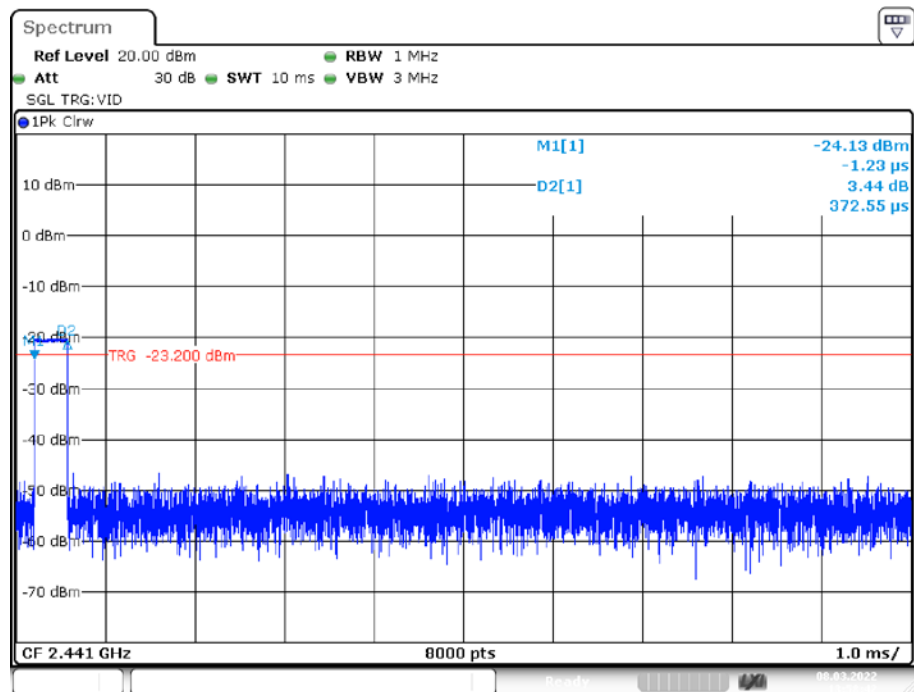


Date: 8.MAR.2022 13:58:42

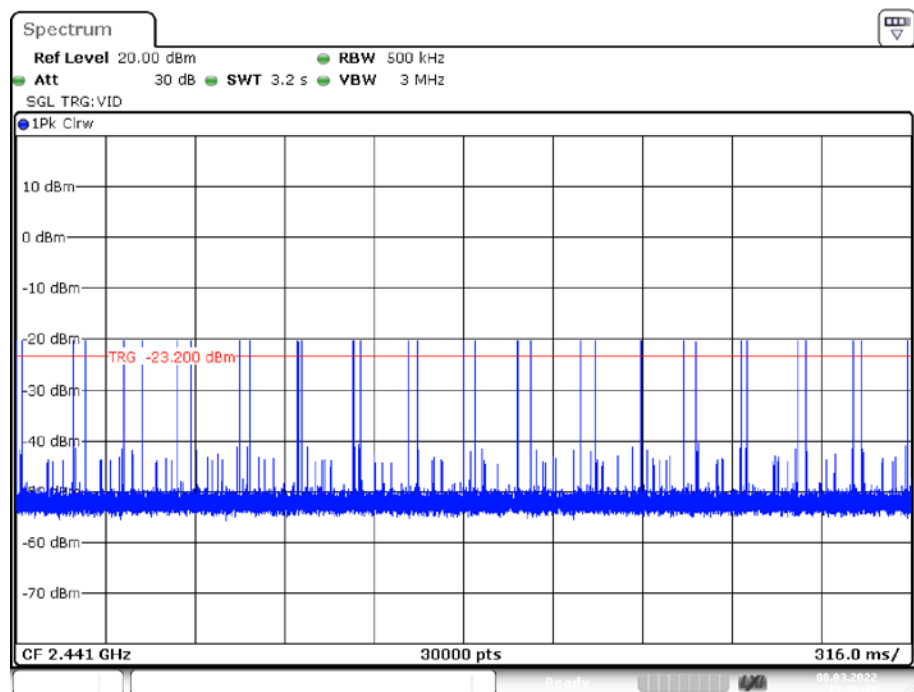


Date: 8.MAR.2022 13:58:47


DH3_Ant1_Hop

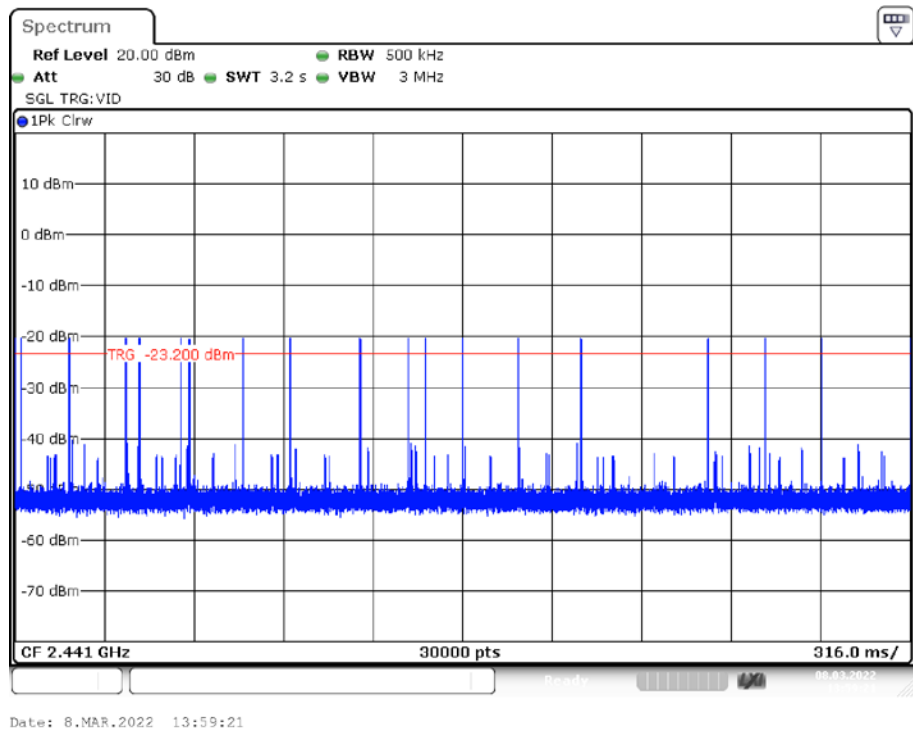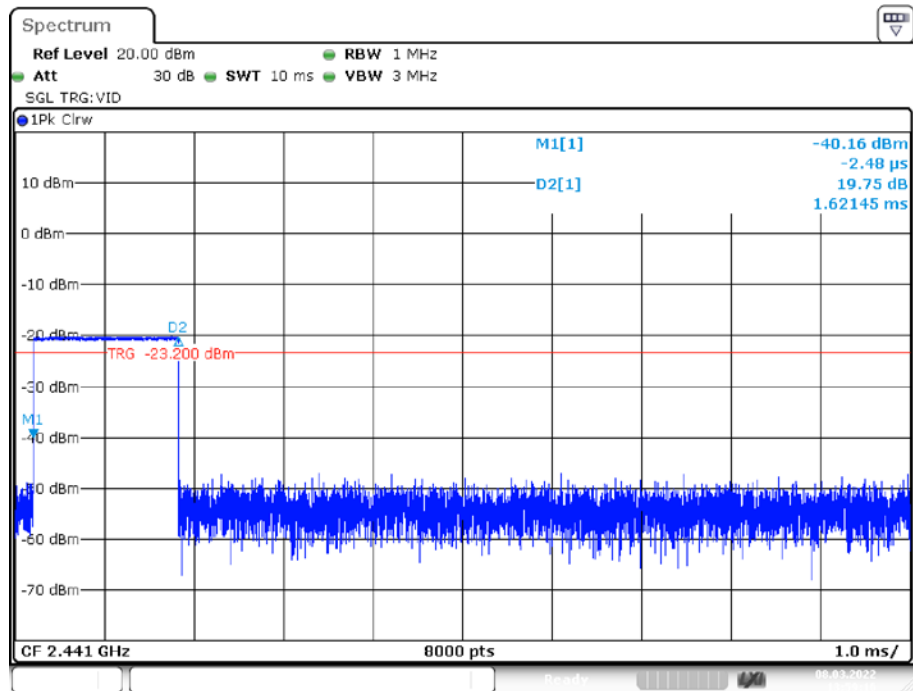

DH5_Ant1_Hop

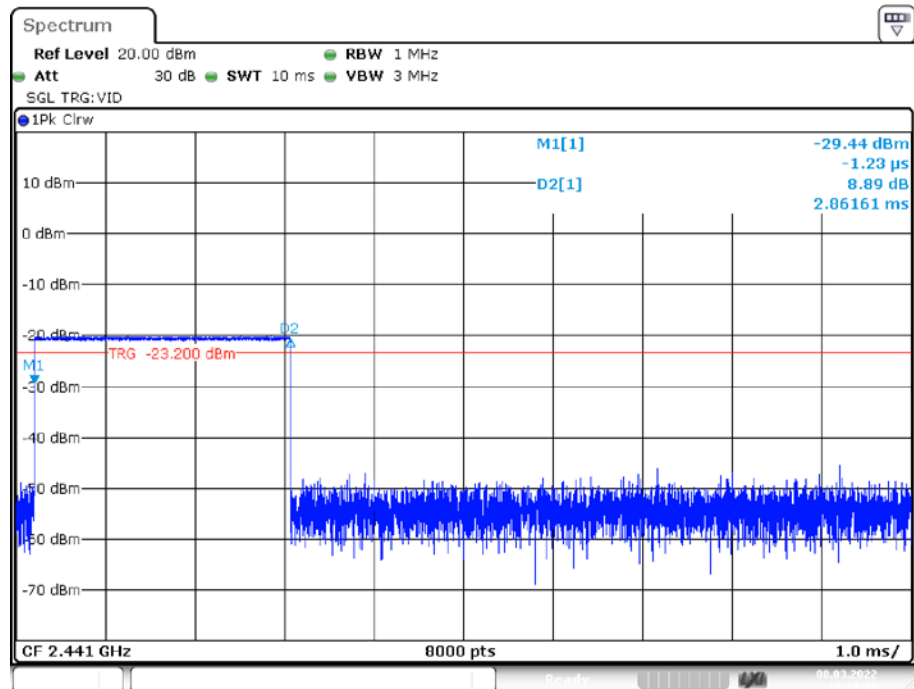



Date: 8.MAR.2022 13:59:49

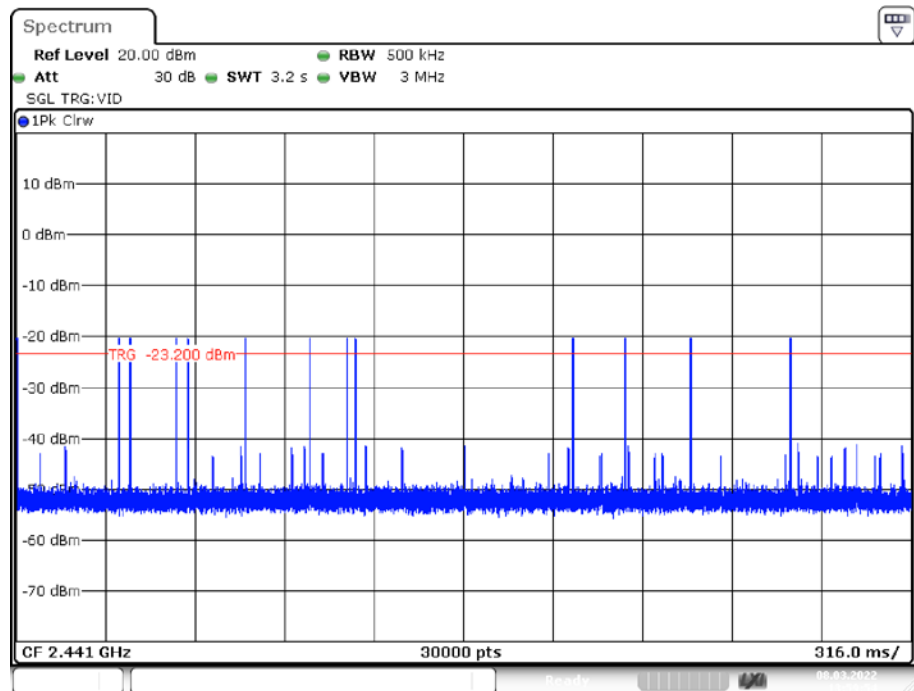



Date: 8.MAR.2022 13:59:55

Ant1: $\pi/4$ -DQPSK


2DH1_Ant1_Hop

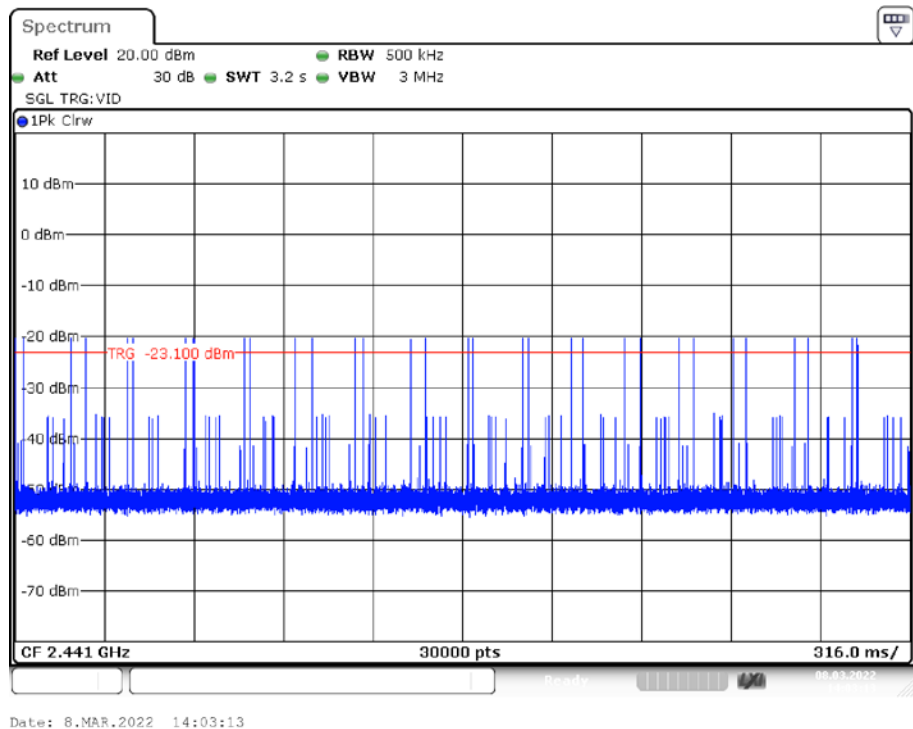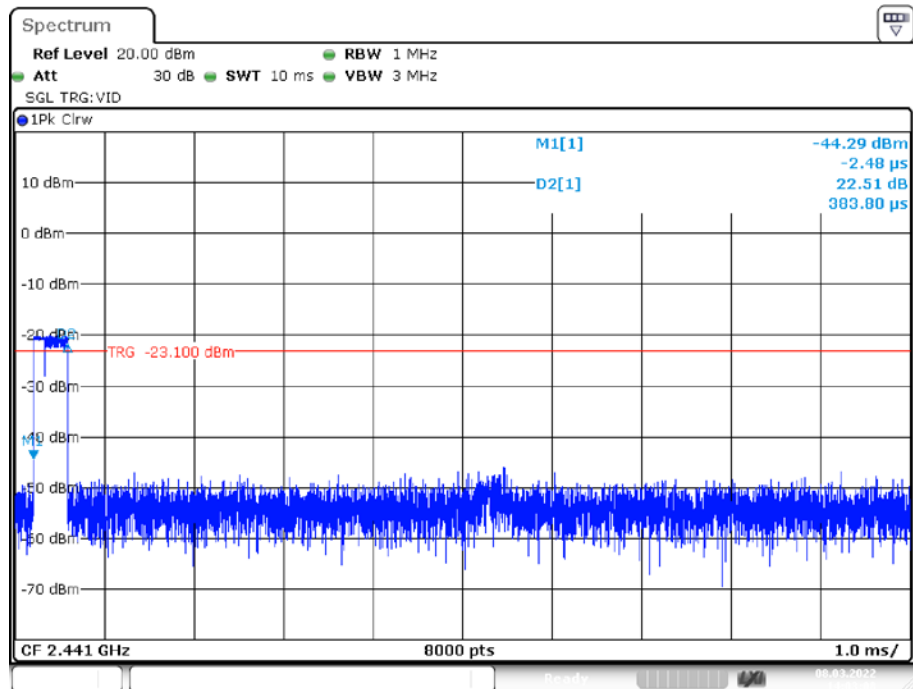


2DH3_Ant1_Hop

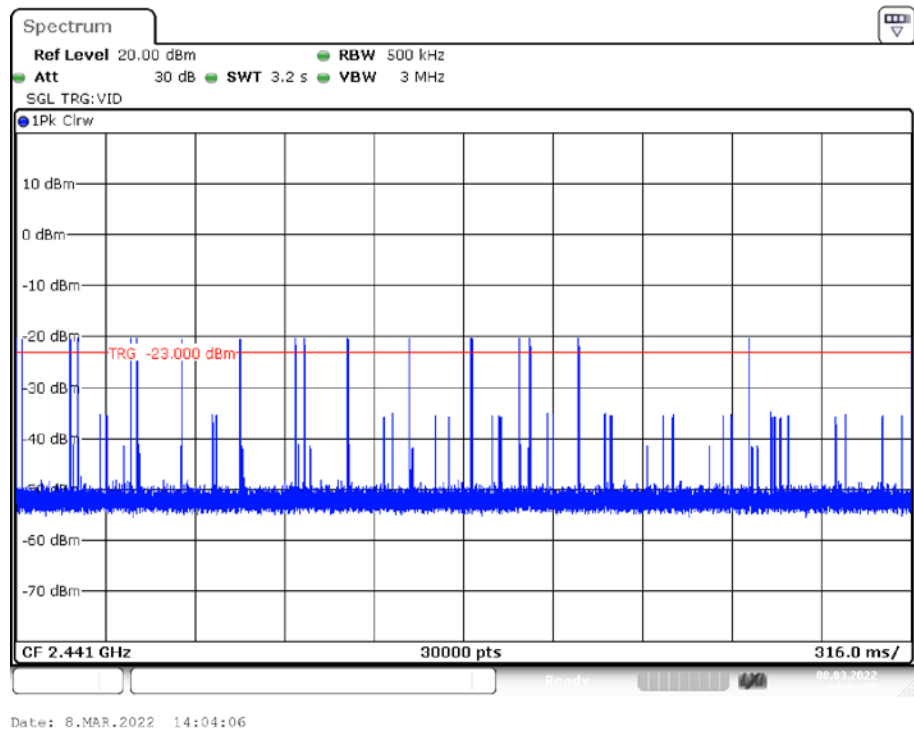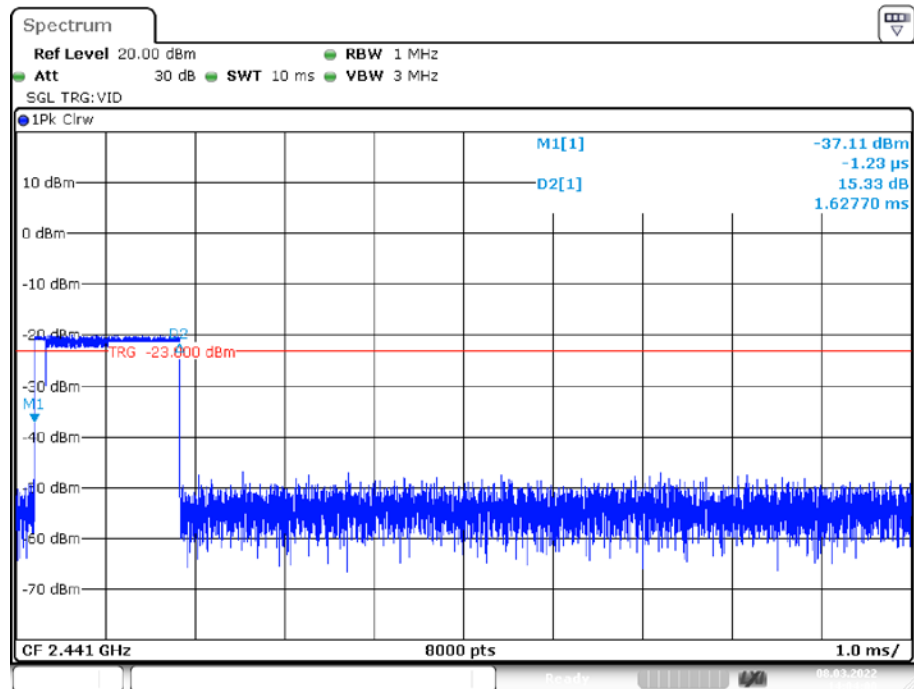

2DH5_Ant1_Hop

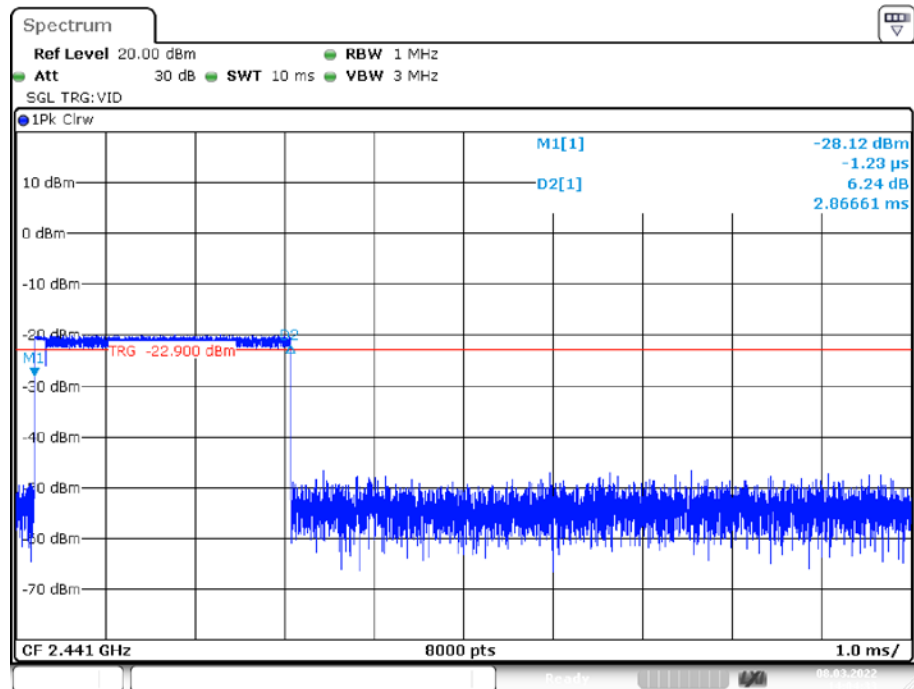


Date: 8.MAR.2022 14:04:33

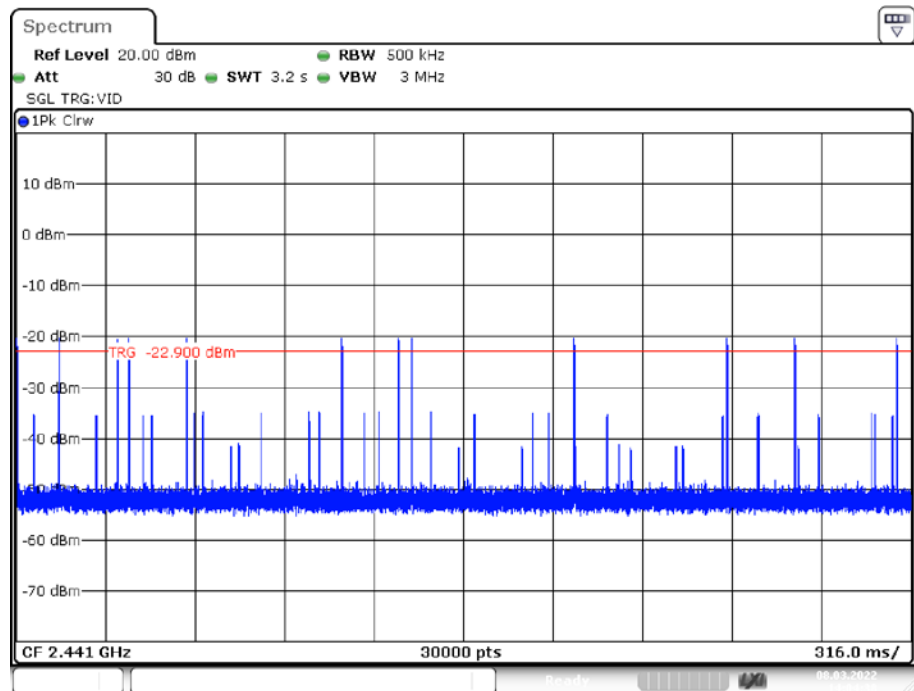


Date: 8.MAR.2022 14:04:38

Ant2: GFSK

DH1_Ant2_Hop


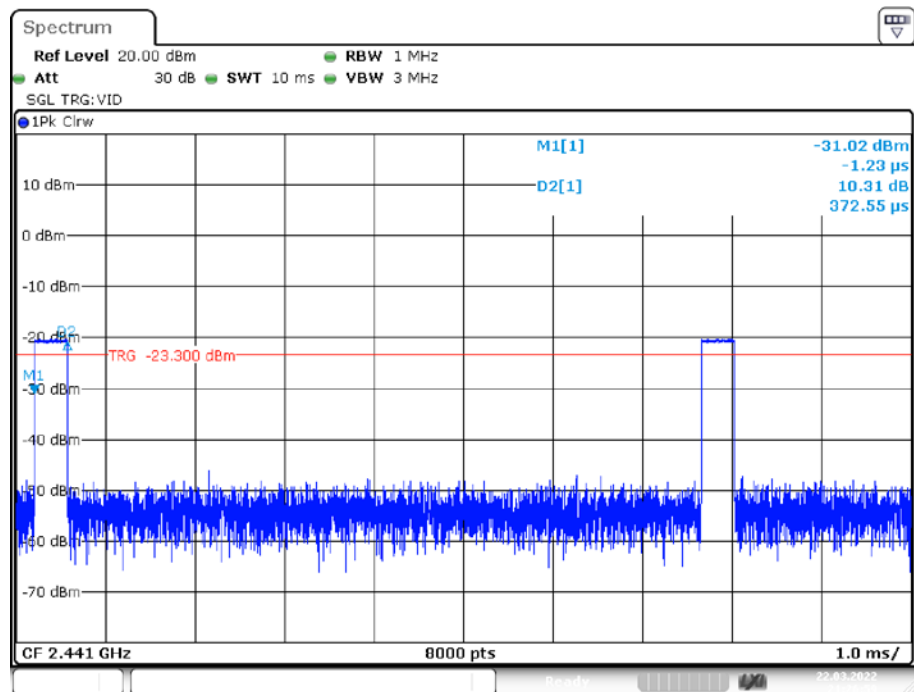


Date: 22.MAR.2022 21:26:59

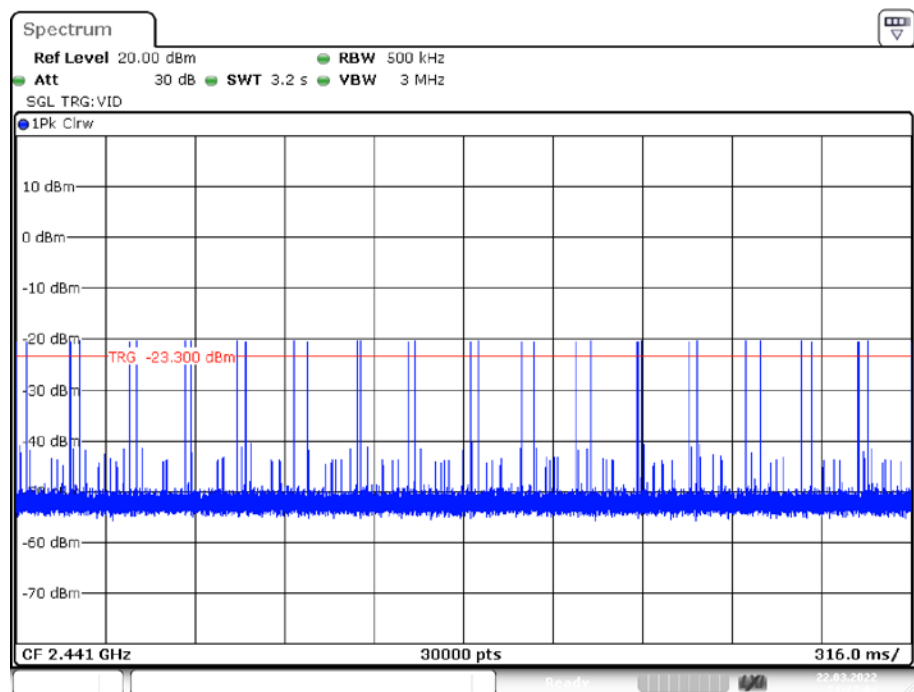


Date: 22.MAR.2022 21:27:04


DH3_Ant2_Hop

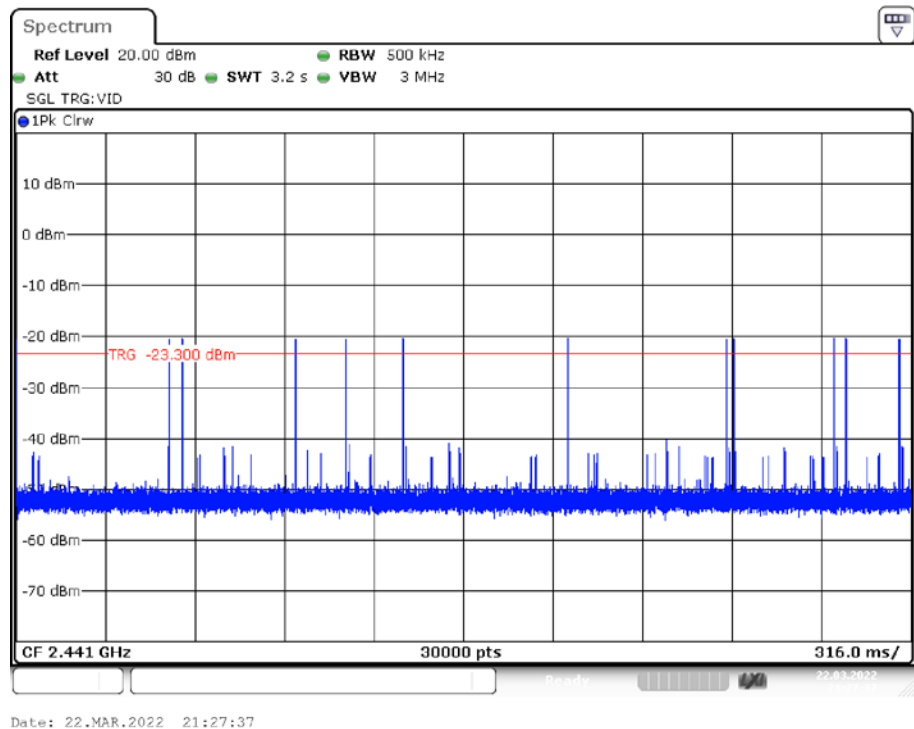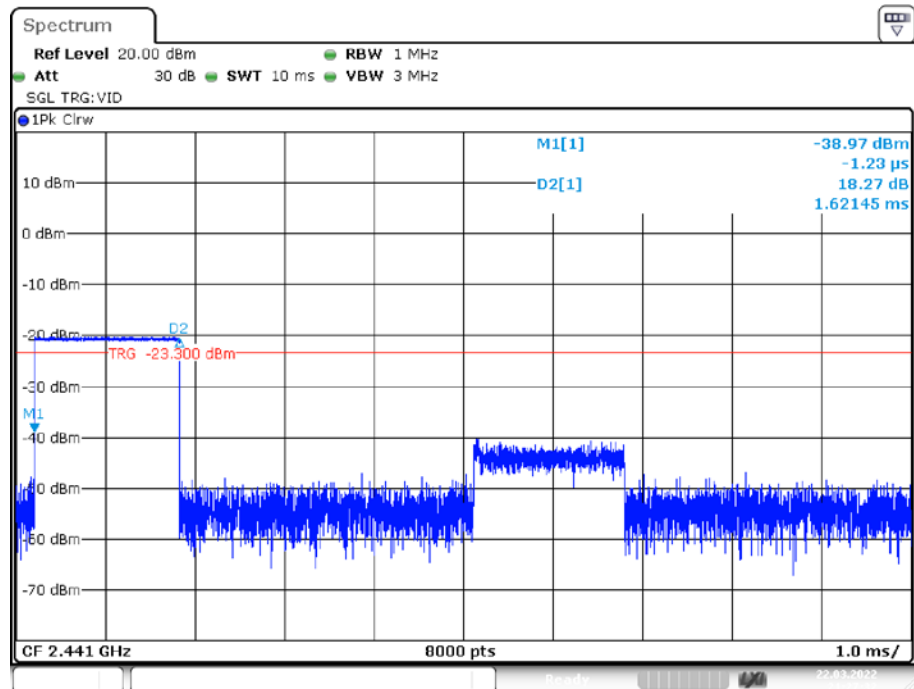

DH5_Ant2_Hop

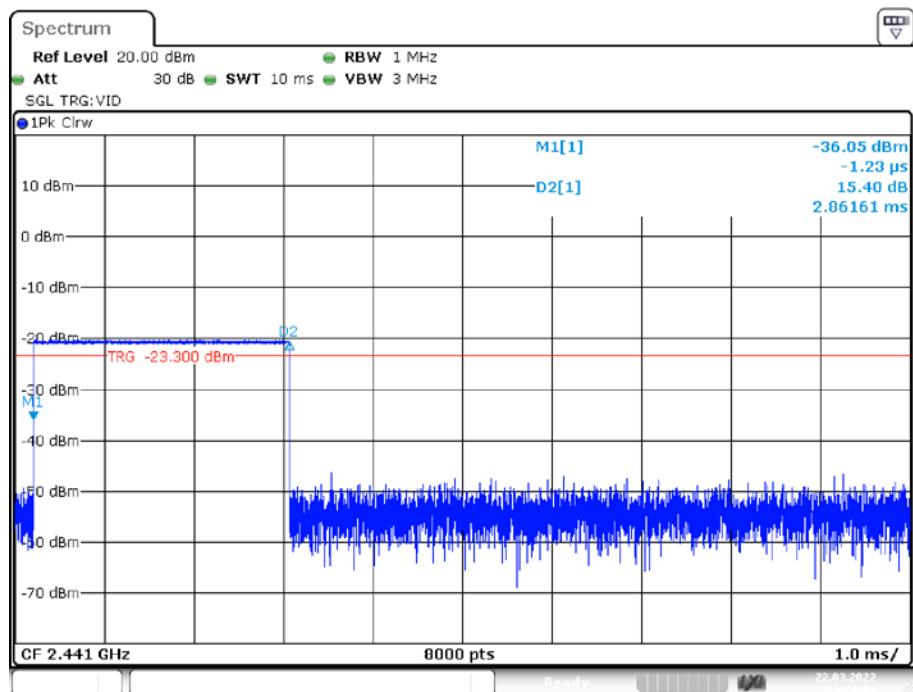


Date: 22.MAR.2022 21:28:04

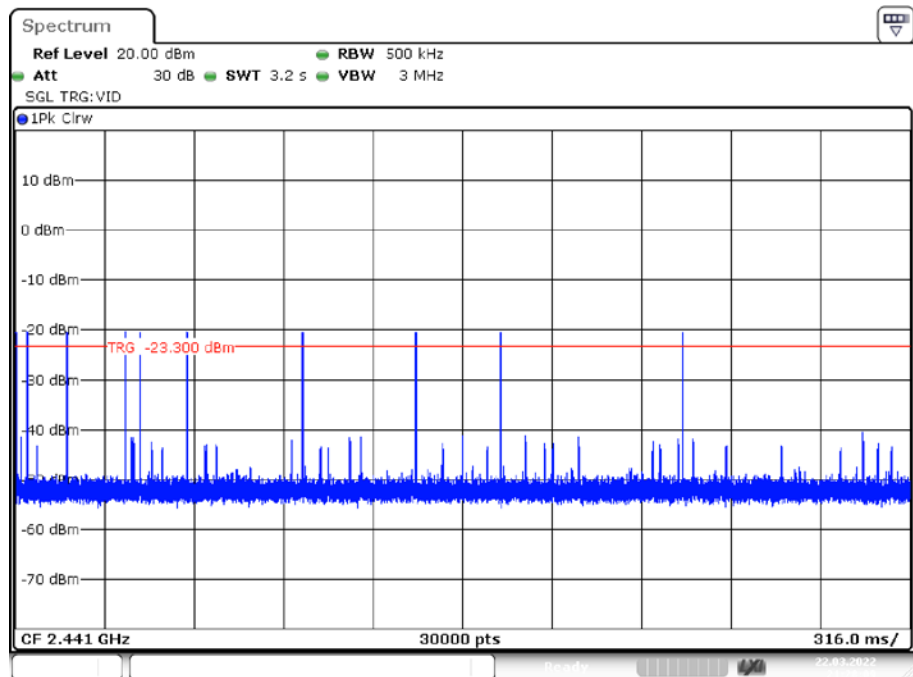


Date: 22.MAR.2022 21:28:09

Ant2: $\pi/4$ -DQPSK

2DH1_Ant2_Hop


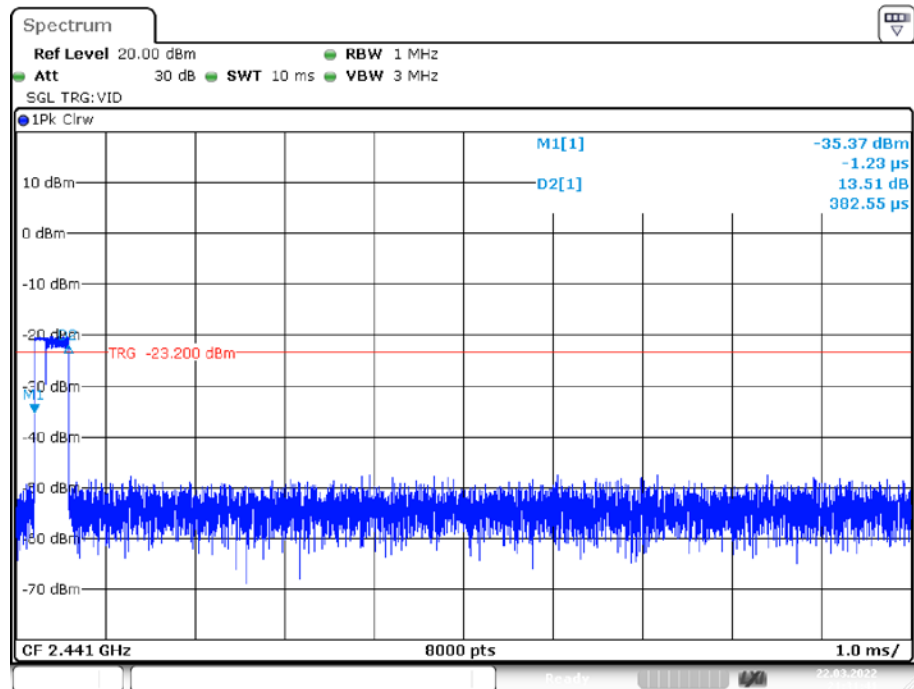


Date: 22.MAR.2022 21:31:41

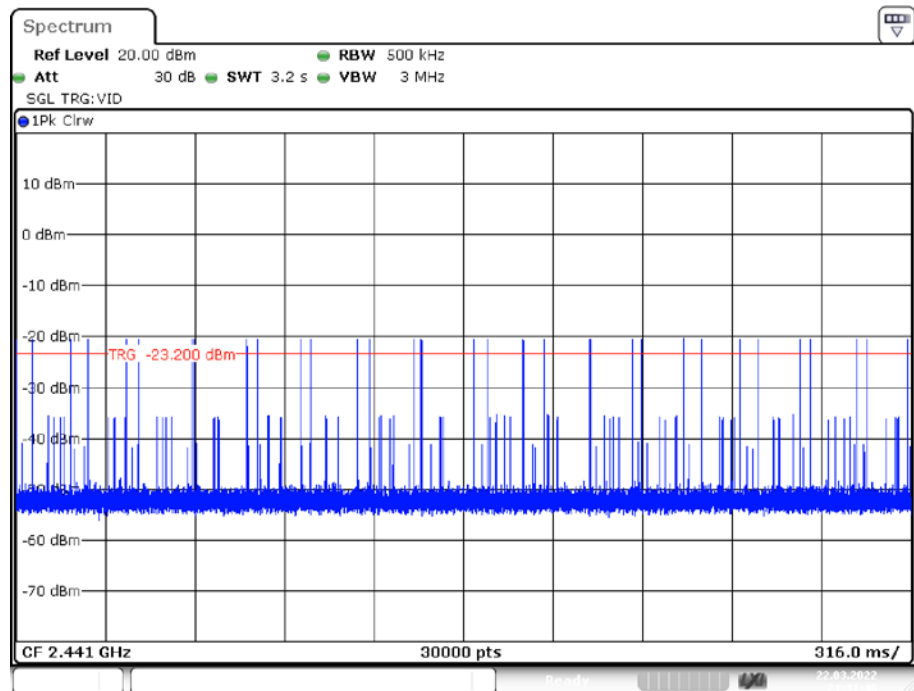


Date: 22.MAR.2022 21:31:46


2DH3_Ant2_Hop

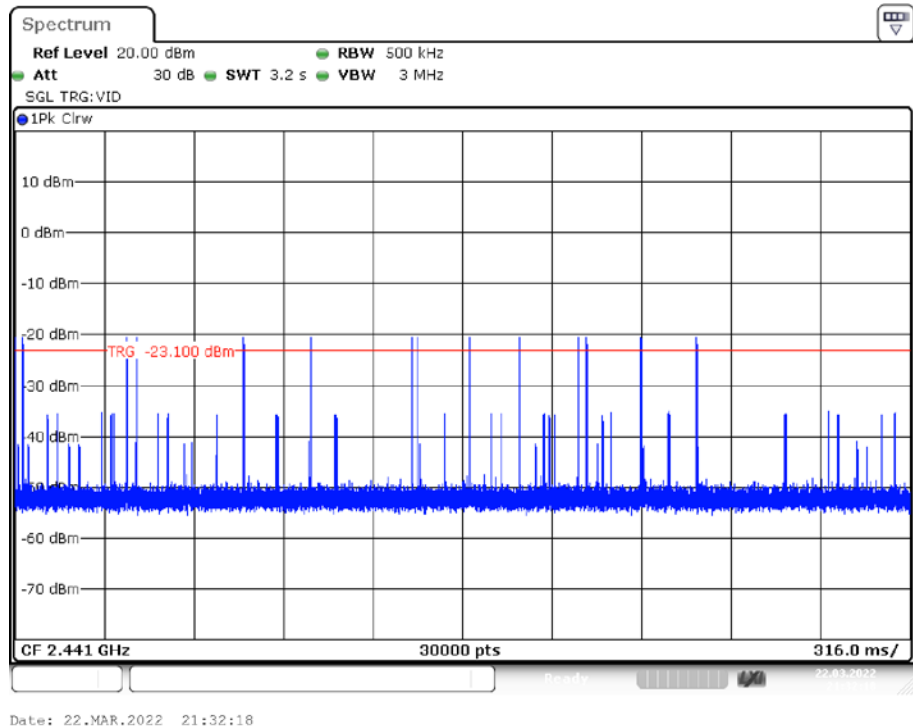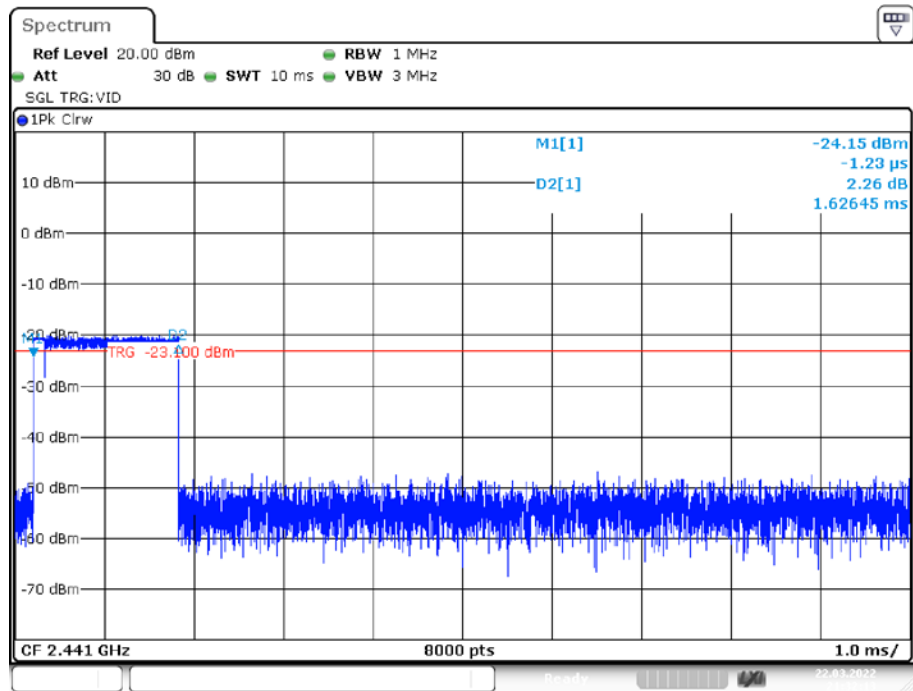

2DH5_Ant2_Hop

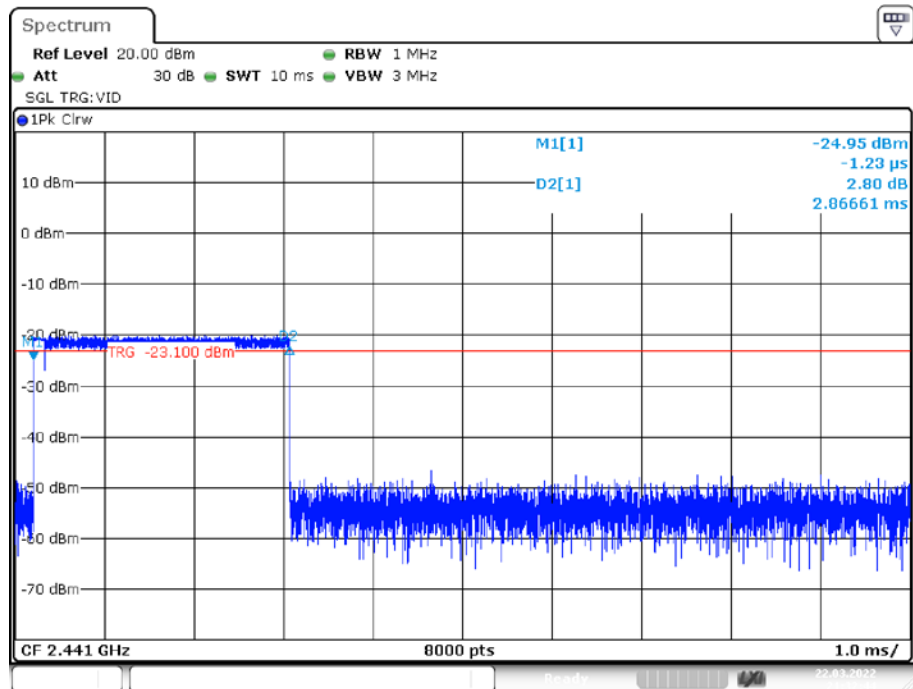

Date: 22.MAR.2022 21:32:44

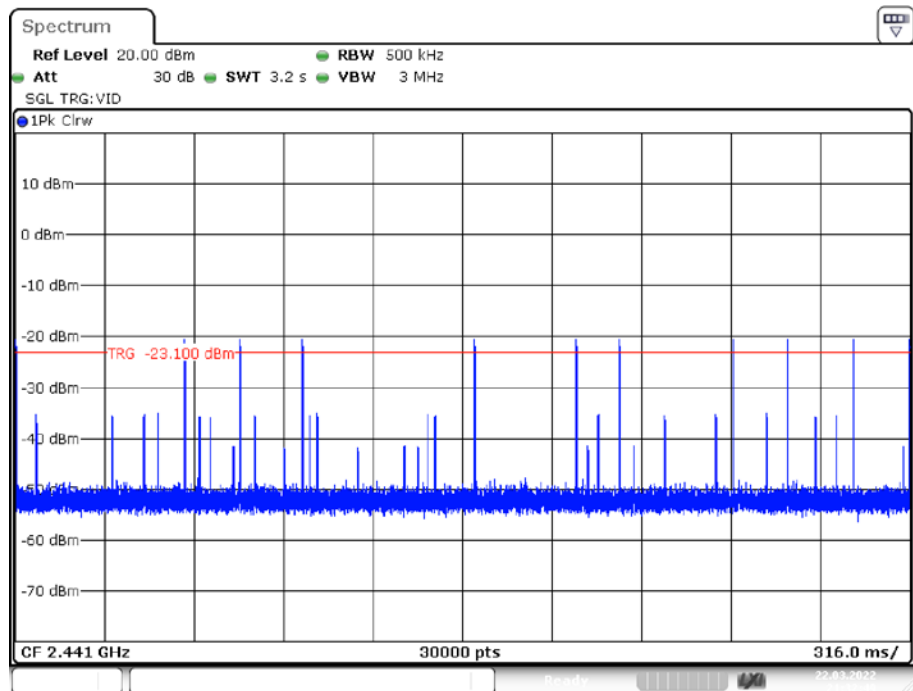

Date: 22.MAR.2022 21:32:50


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	19 -21 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Paul Liu from 2022-03-08 to 2022-03-22.

EUT operation mode: Transmitting

Test Result: Compliant.


Ant1:

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH1	Ant1	2402	0.04	<=20.97	PASS
		2441	0.09	<=20.97	PASS
		2480	0.11	<=20.97	PASS
2DH1	Ant1	2402	0.26	<=20.97	PASS
		2441	0.63	<=20.97	PASS
		2480	0.66	<=20.97	PASS


Ant2:

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH1	Ant2	2402	0.4	<=20.97	PASS
		2441	0.03	<=20.97	PASS
		2480	0.25	<=20.97	PASS
2DH1	Ant2	2402	0.45	<=20.97	PASS
		2441	0.55	<=20.97	PASS
		2480	0.74	<=20.97	PASS

Please refer to the below plots:

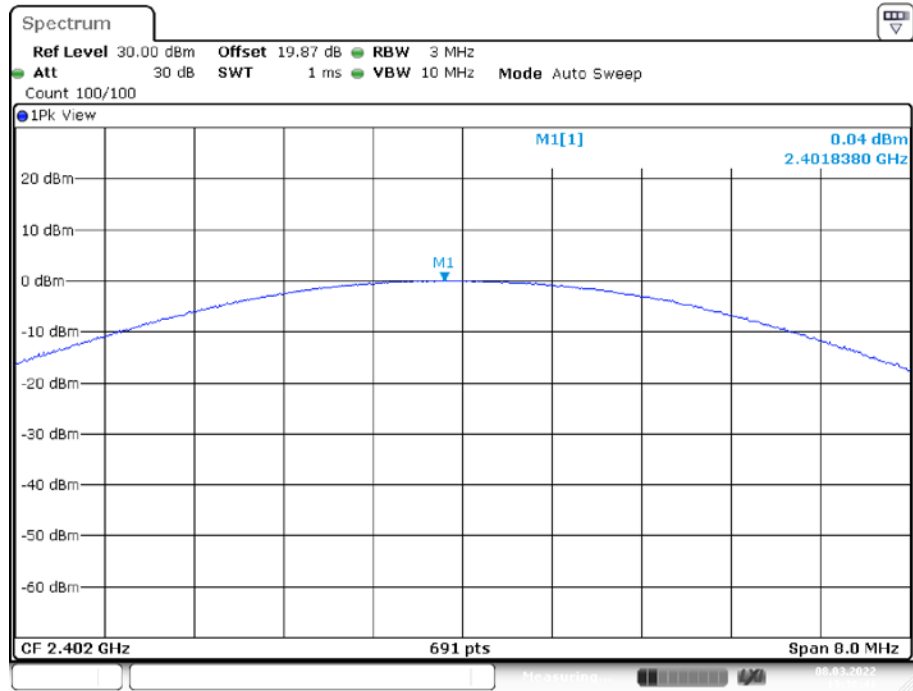
Ant1:**DH1_Ant1_2402**

Date: 8.MAR.2022 13:38:41

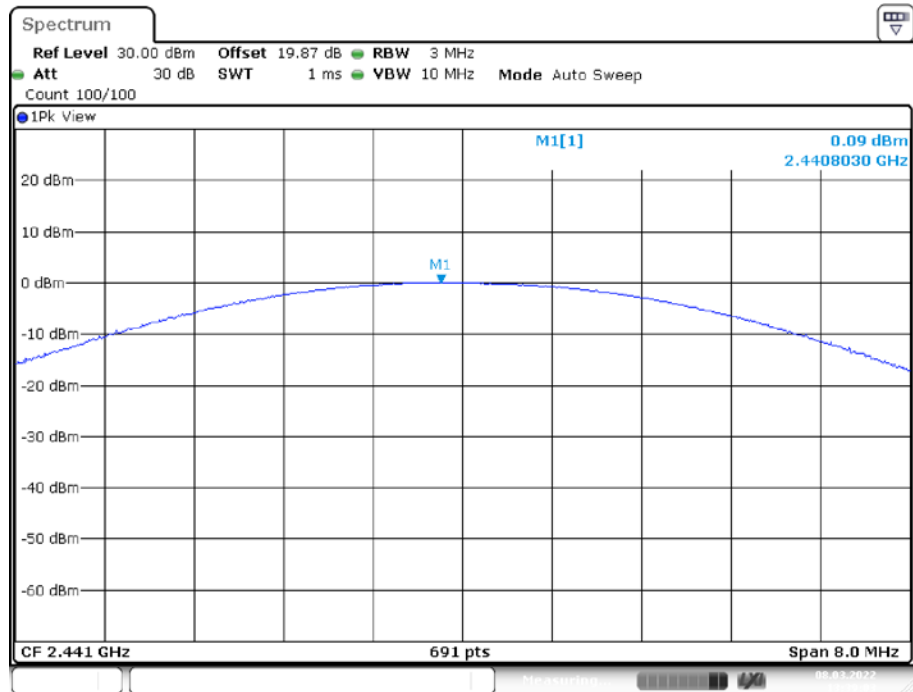DH1_Ant1_2441


Date: 8.MAR.2022 13:39:03

DH1_Ant1_2480

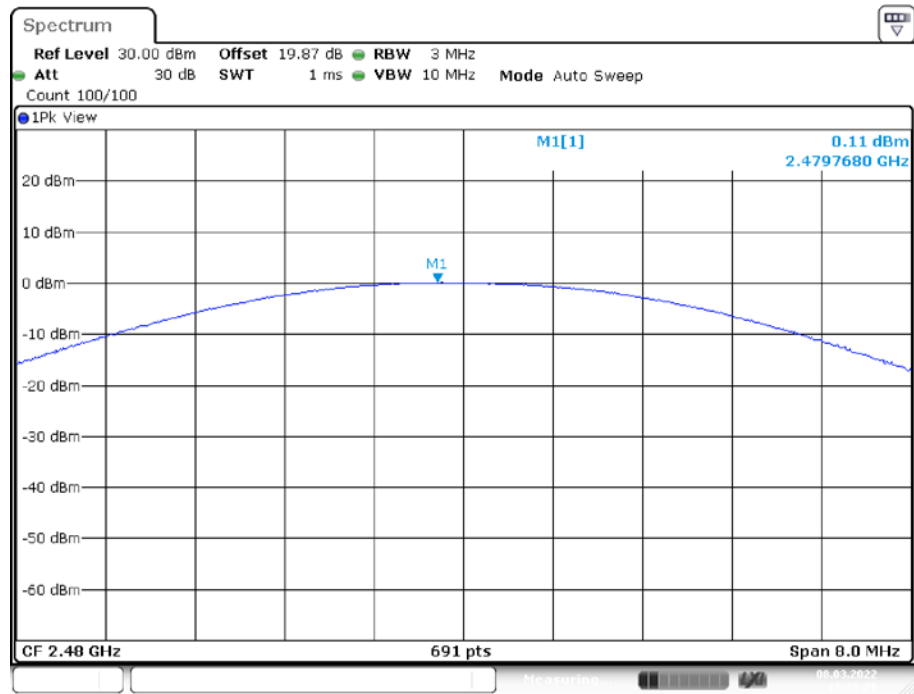


Date: 8.MAR.2022 13:39:27

2DH1_Ant1_2402

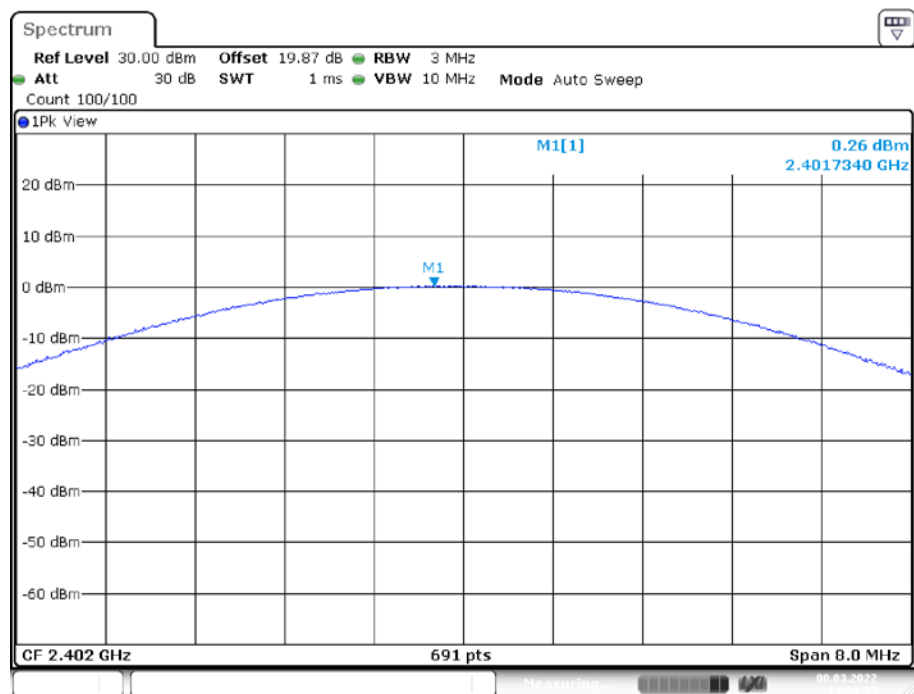


Date: 8.MAR.2022 13:39:55

2DH1_Ant1_2441

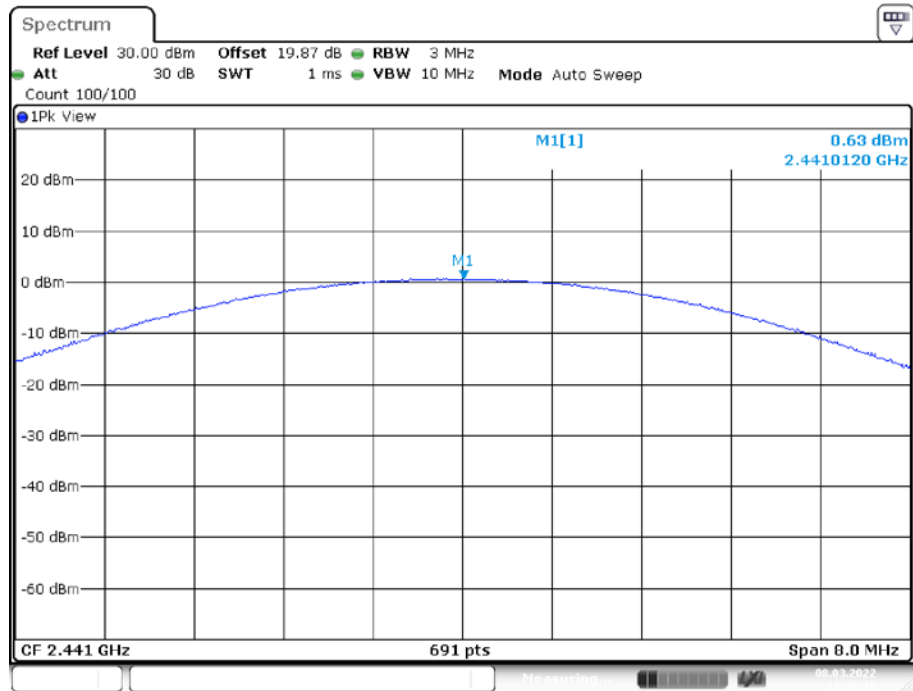


Date: 8.MAR.2022 13:40:15


2DH1_Ant1_2480

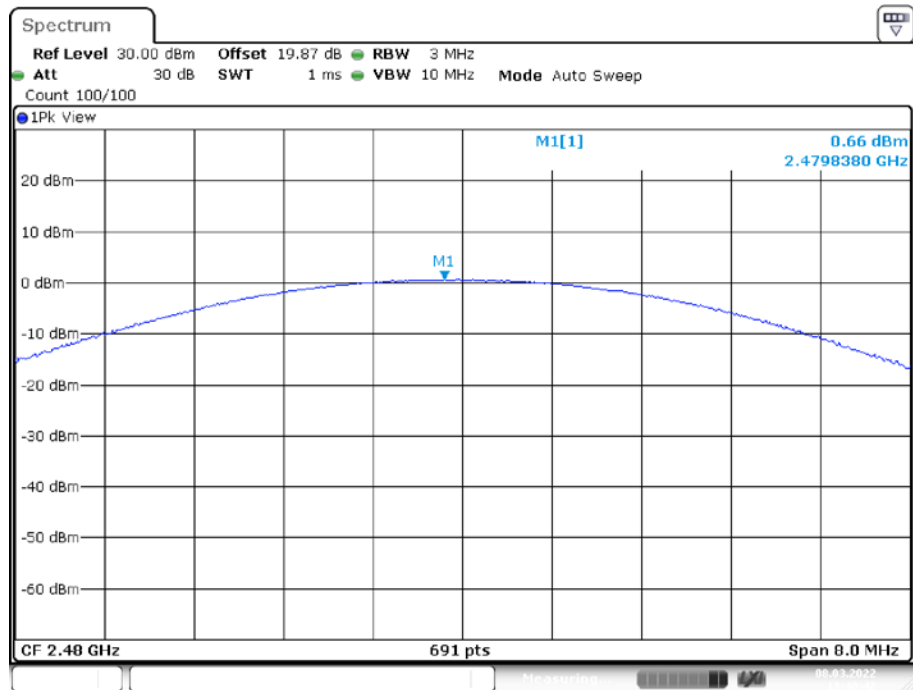

Date: 8.MAR.2022 13:40:42

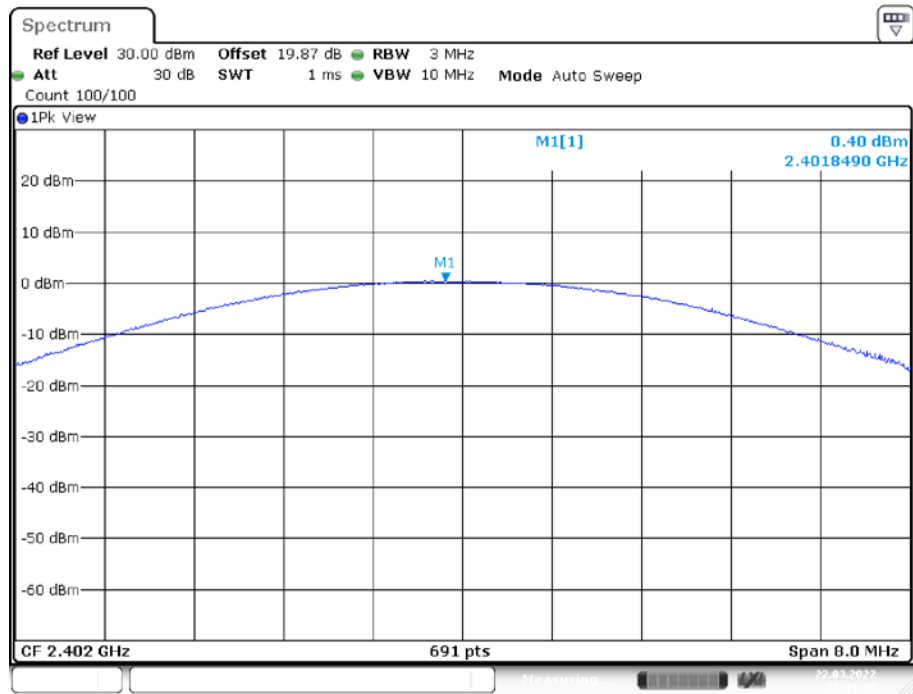
Ant2:**DH1_Ant2_2402**

Date: 22.MAR.2022 21:11:49

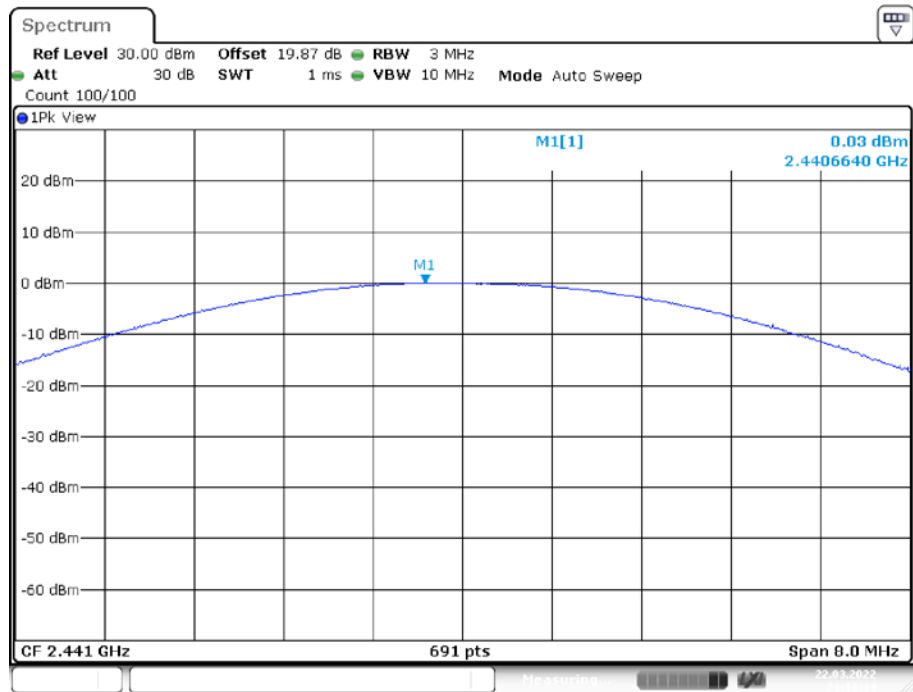DH1_Ant2_2441


Date: 22.MAR.2022 21:12:14

DH1_Ant2_2480

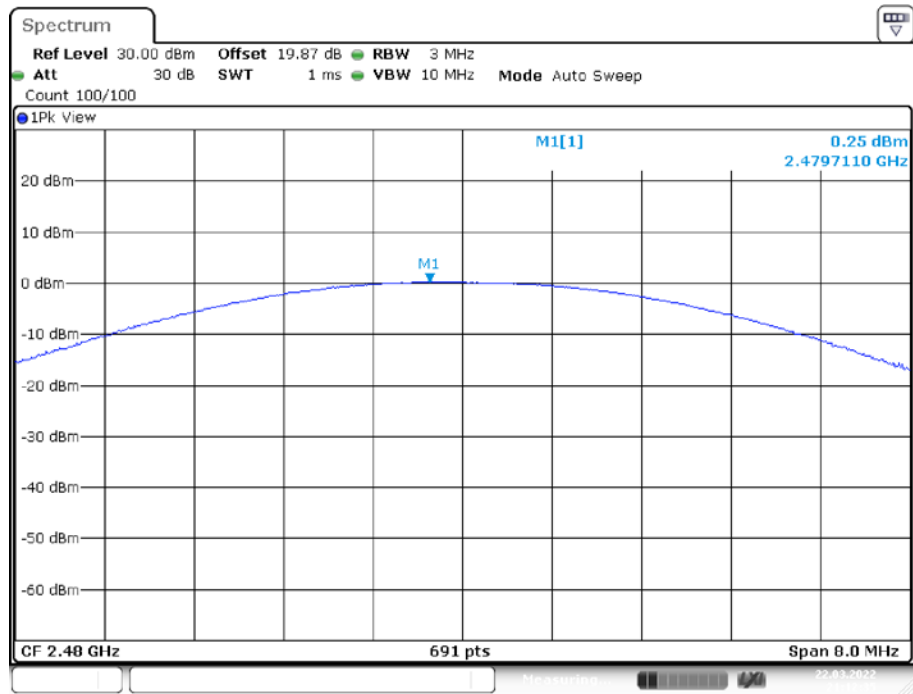


Date: 22.MAR.2022 21:12:35

2DH1_Ant2_2402

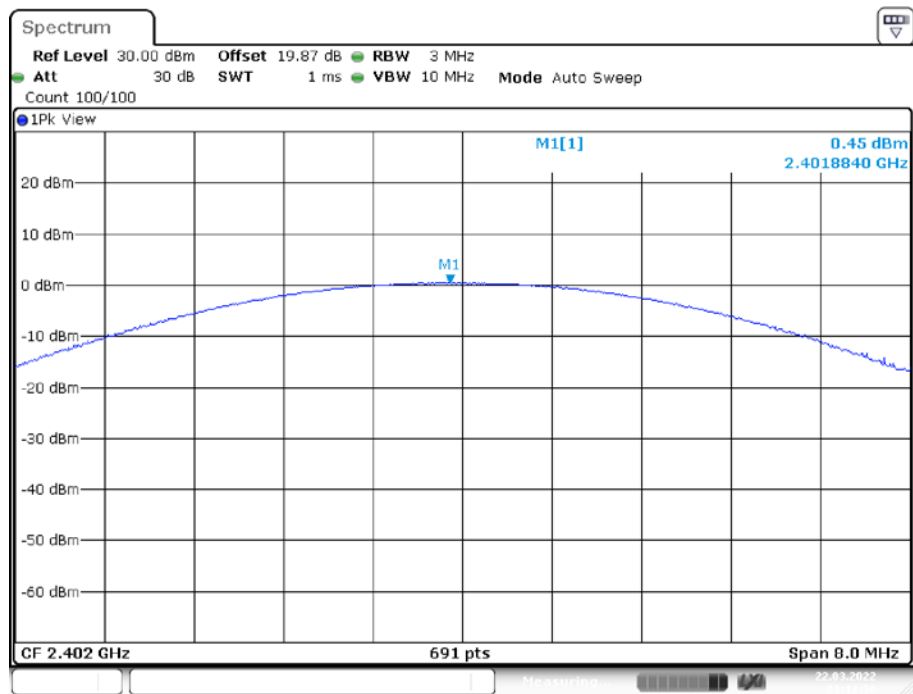


Date: 22.MAR.2022 21:12:58

2DH1_Ant2_2441

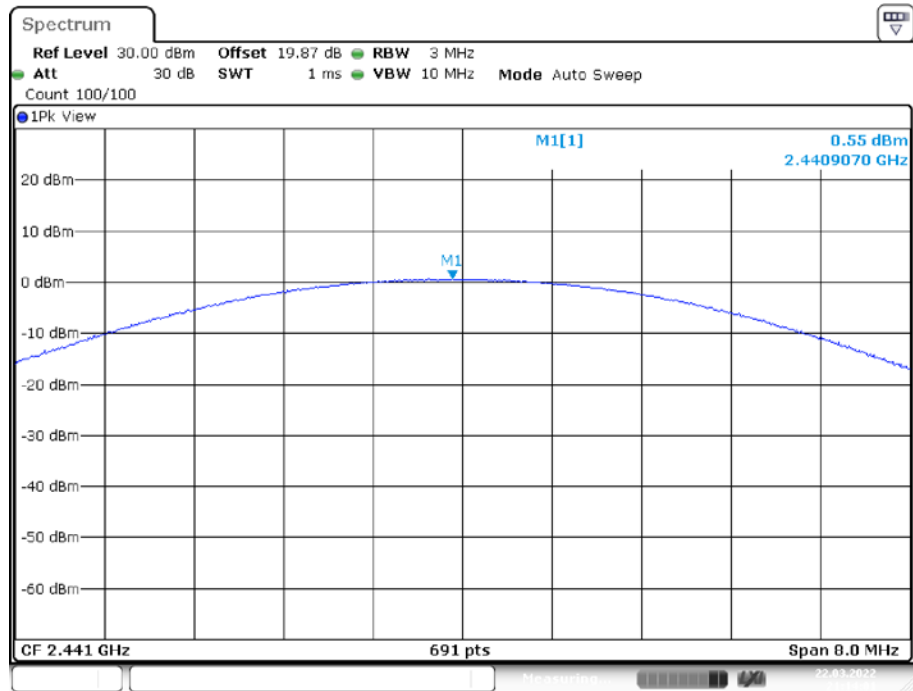

Date: 22.MAR.2022 21:14:01

2DH1_Ant2_2480

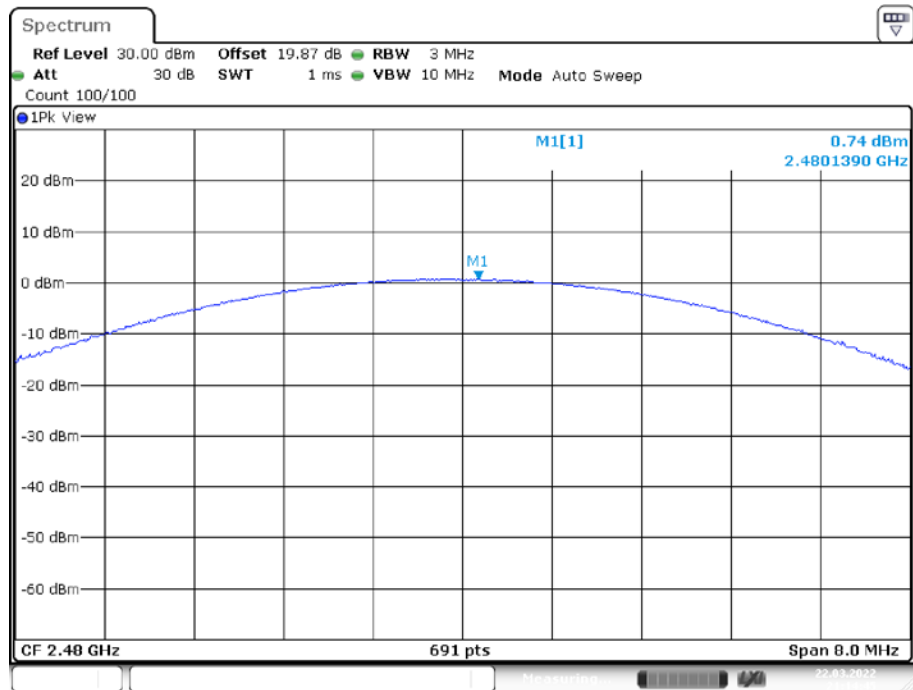

Date: 22.MAR.2022 21:14:45


FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data

Environmental Conditions



Temperature:	19-21℃
Relative Humidity:	48-52 %
ATM Pressure:	101.0 kPa

The testing was performed by Paul Liu from 2022-03-08 to 2022-03-22.


EUT operation mode: Transmitting

Test Result: Compliant.

Please refer to the below plots:

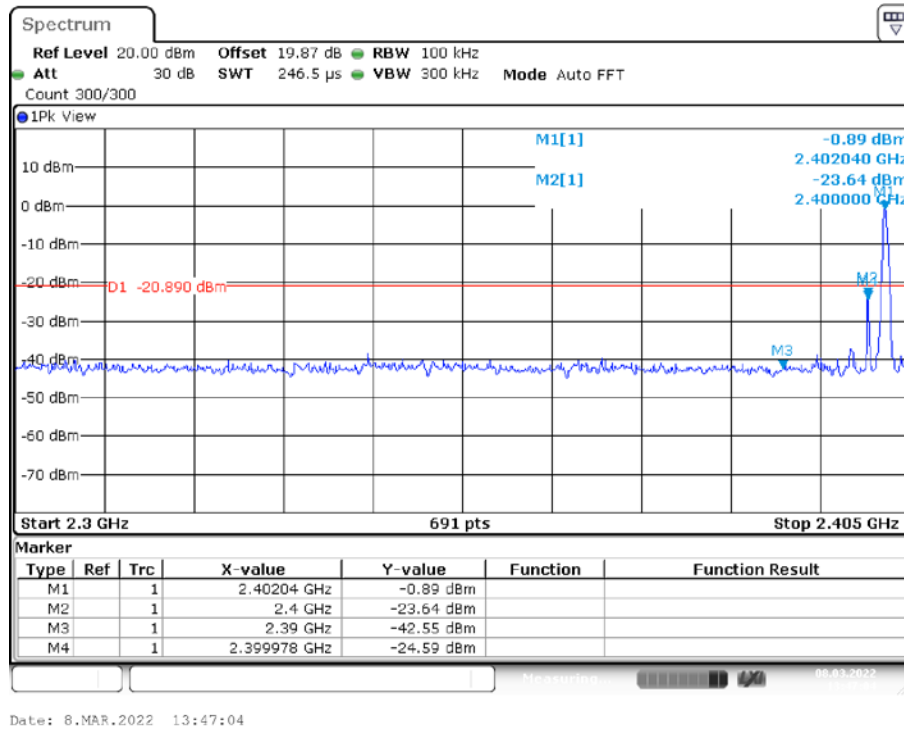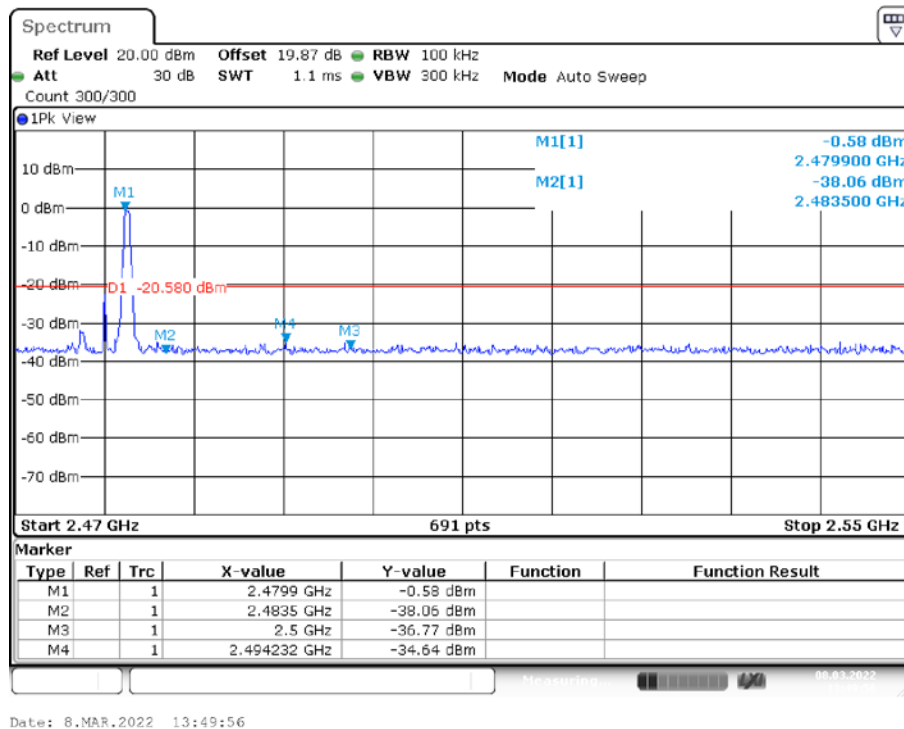
Conducted Band Edge Result:**Ant1:****DH1_Ant1_Low_2402****DH1_Ant1_High_2480**

DH1_Ant1_Low_Hop_2402

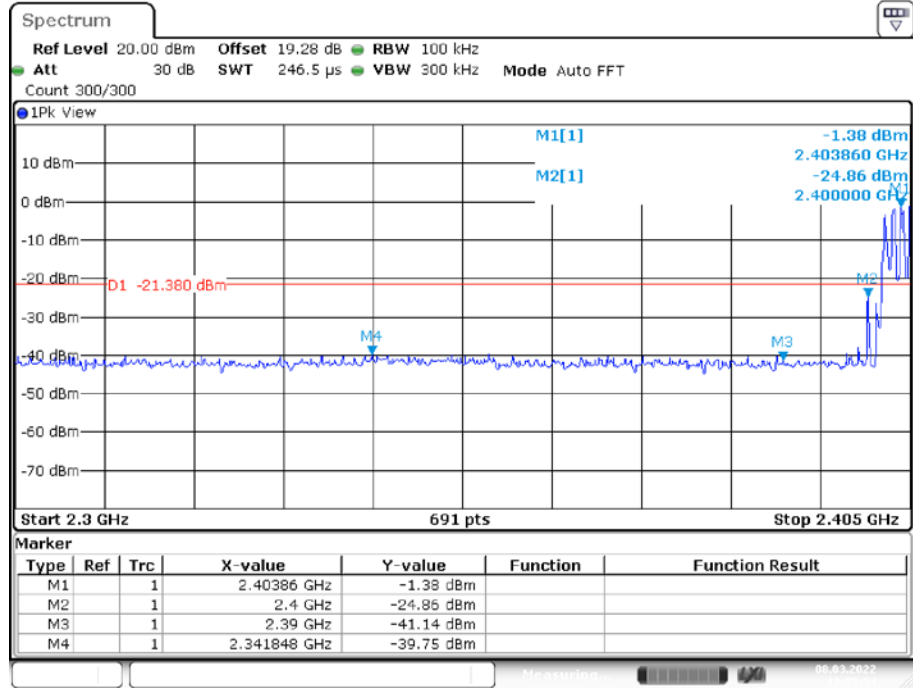


Date: 8.MAR.2022 13:55:54

DH1_Ant1_High_Hop_2480

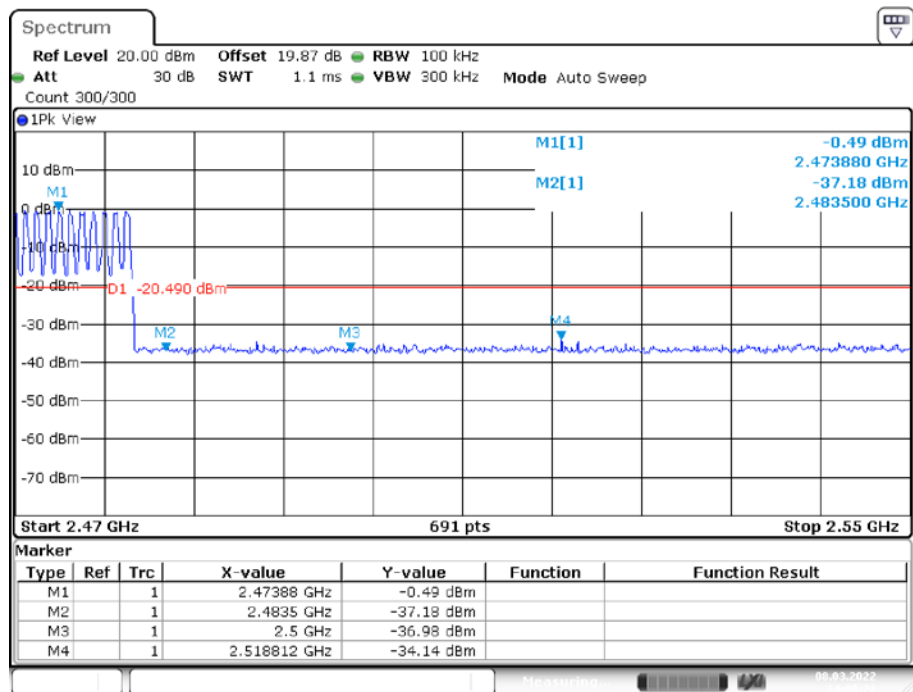


Date: 8.MAR.2022 14:00:23


2DH1_Ant1_Low_2402

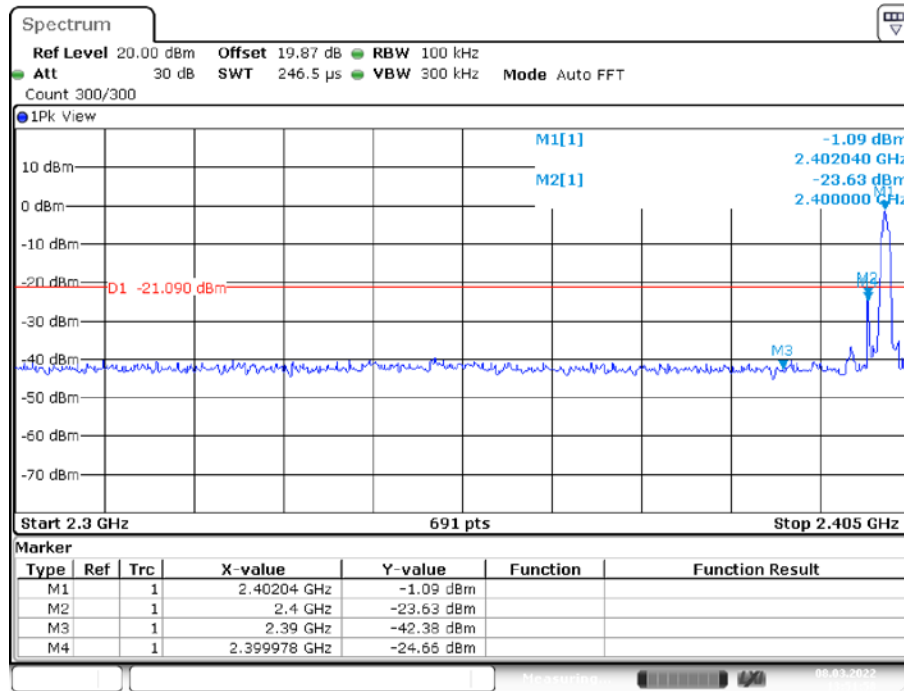


2DH1_Ant1_High_2480

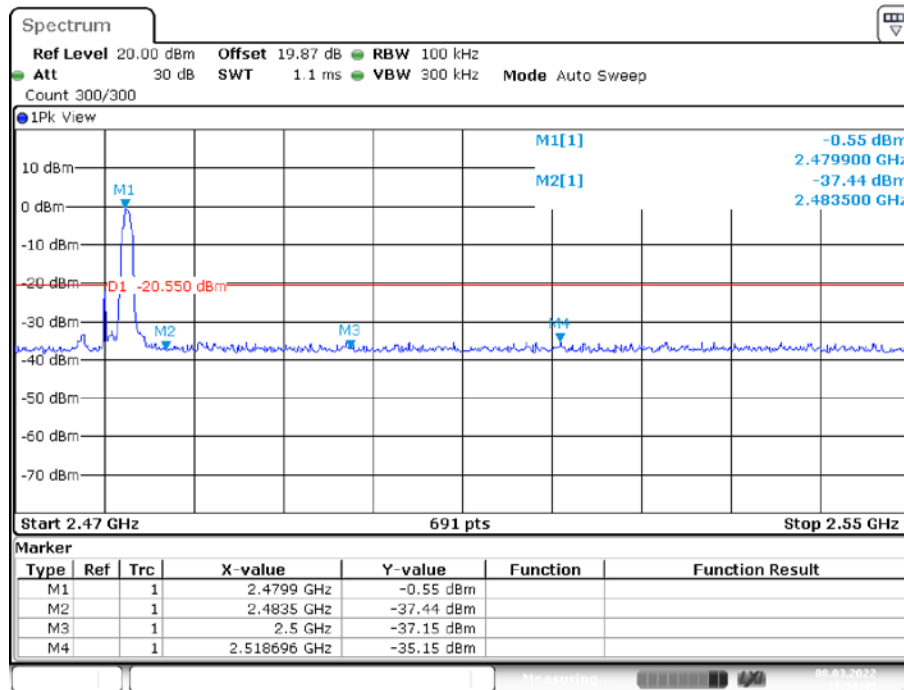

2DH1_Ant1_Low_Hop_2402

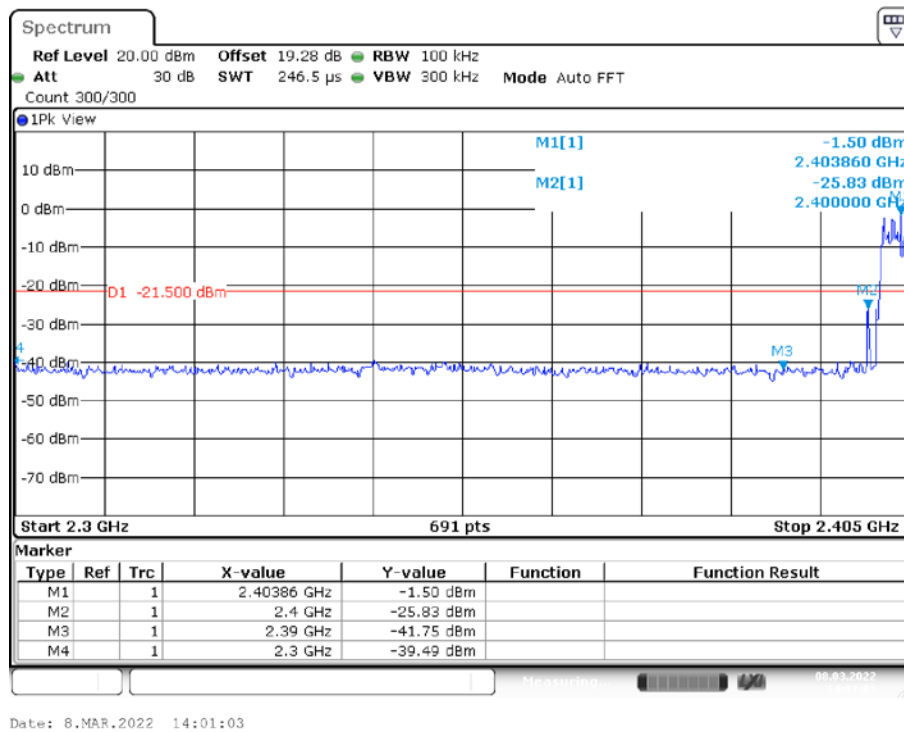


2DH1_Ant1_High_Hop_2480

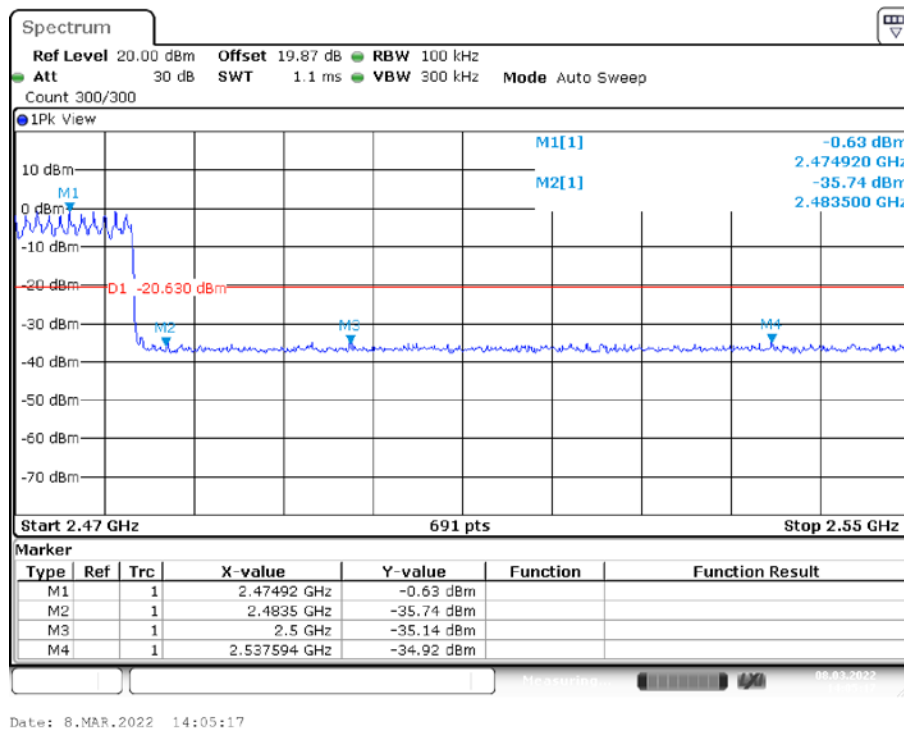


Ant2:

DH1_Ant2_Low_2402

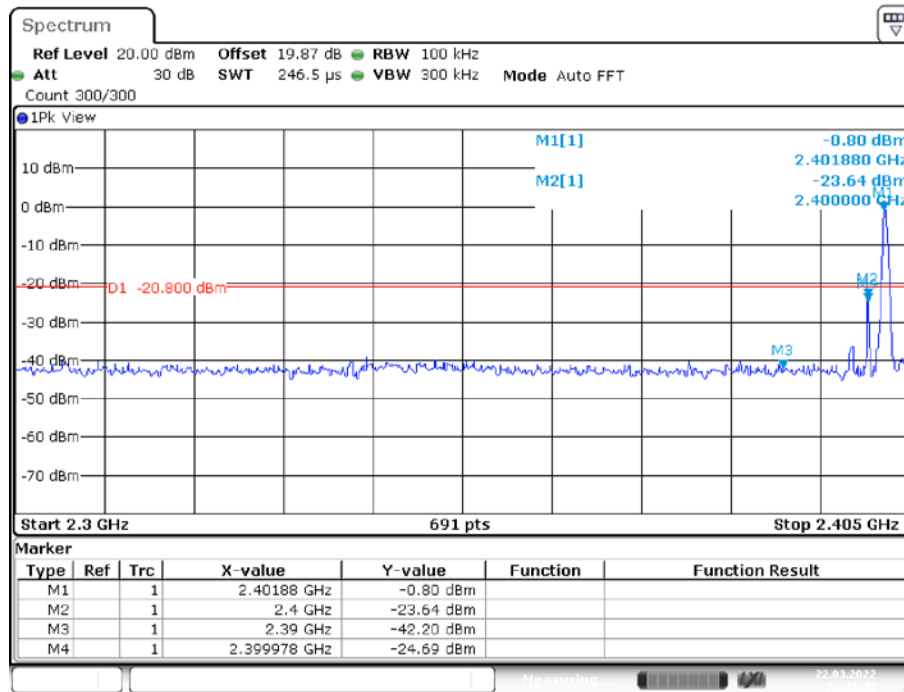


Date: 22.MAR.2022 21:17:42

DH1_Ant2_High_2480

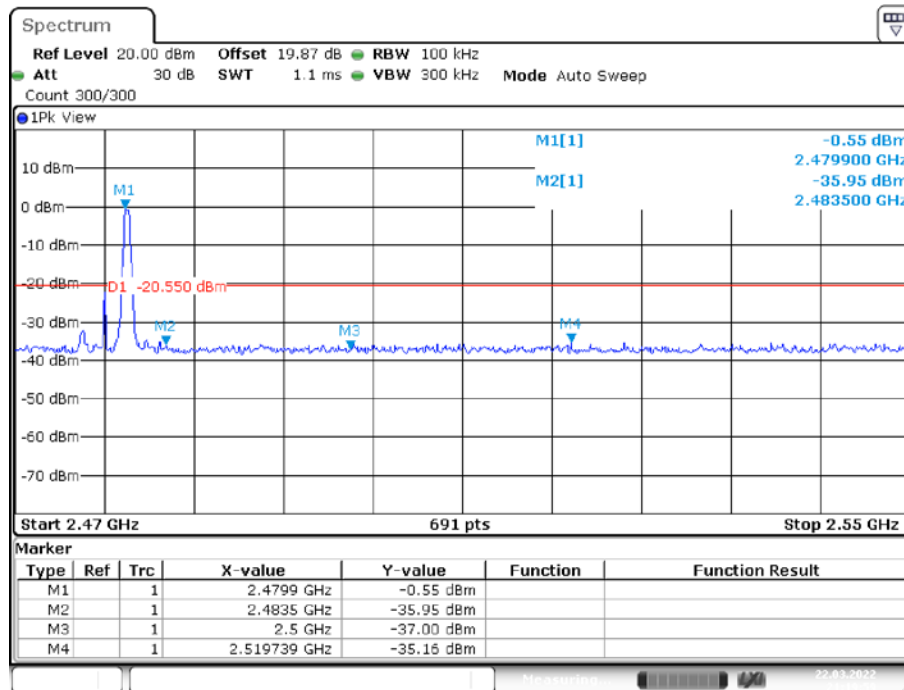


Date: 22.MAR.2022 21:19:59

DH1_Ant2_Low_Hop_2402

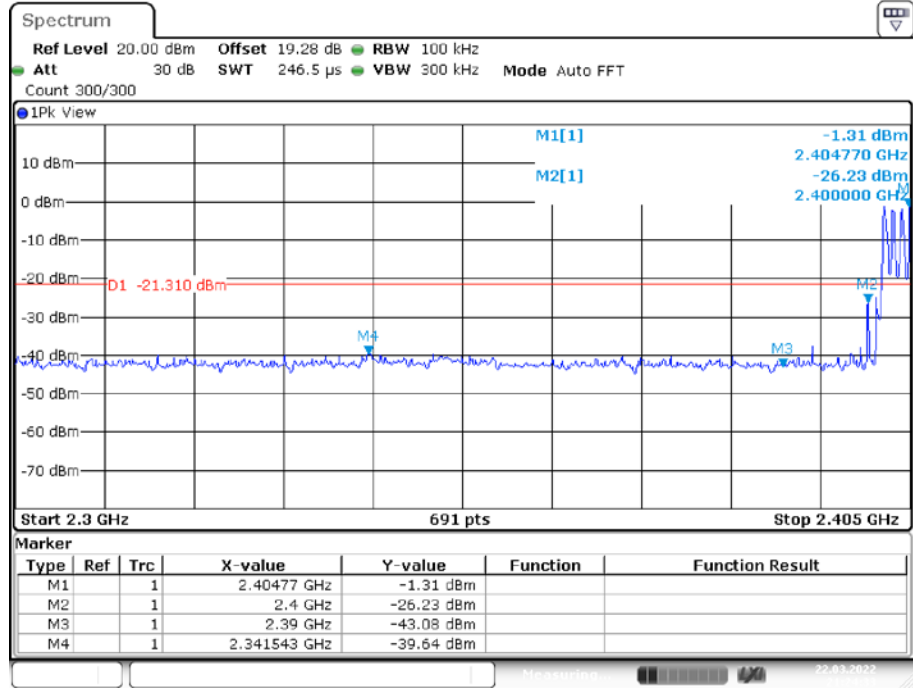


Date: 22.MAR.2022 21:24:33

DH1_Ant2_High_Hop_2480

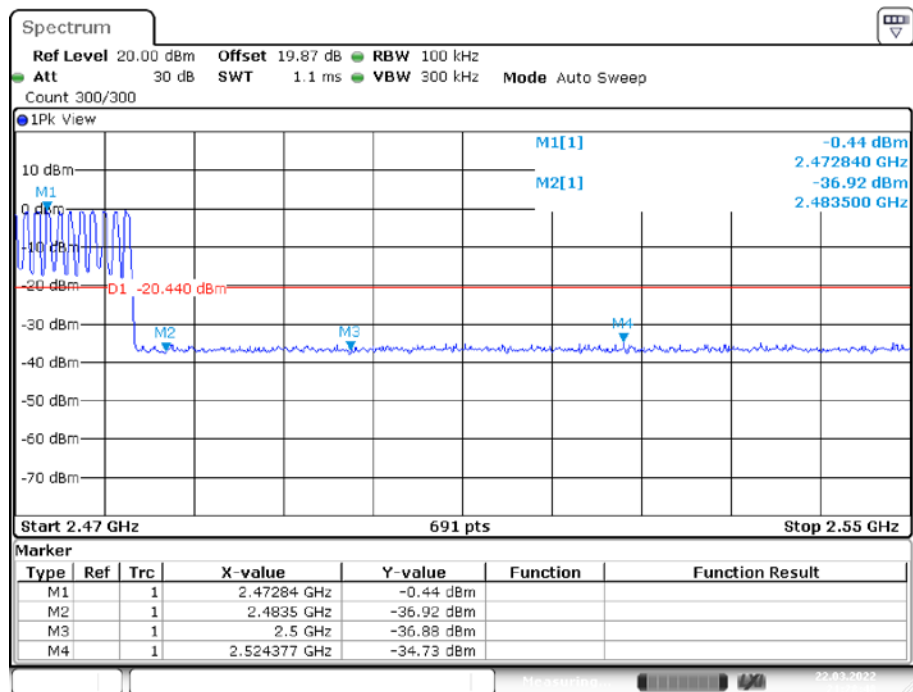


Date: 22.MAR.2022 21:28:48

2DH1_Ant2_Low_2402

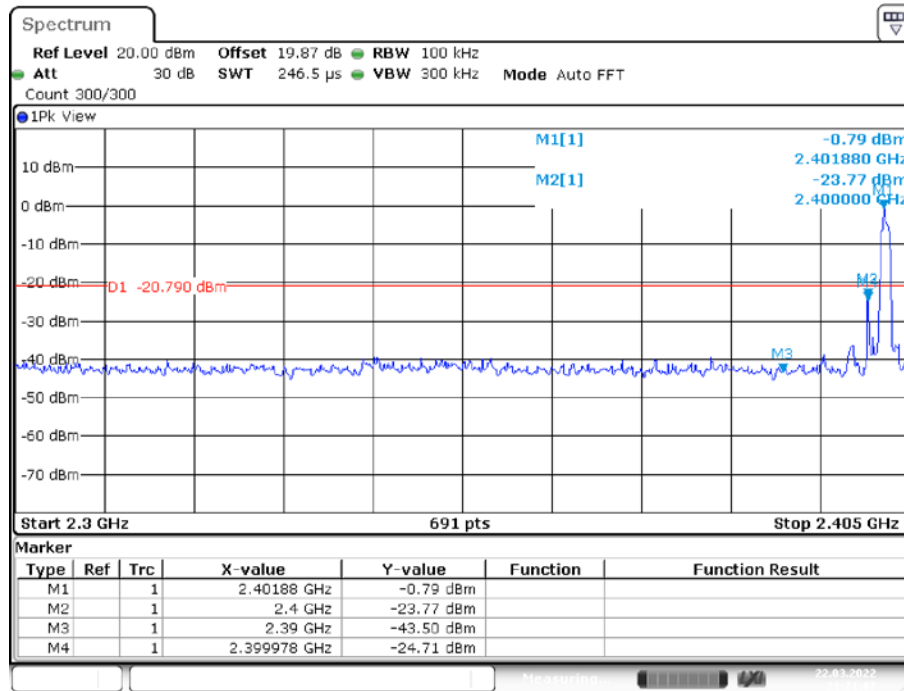


Date: 22.MAR.2022 21:21:08

2DH1_Ant2_High_2480

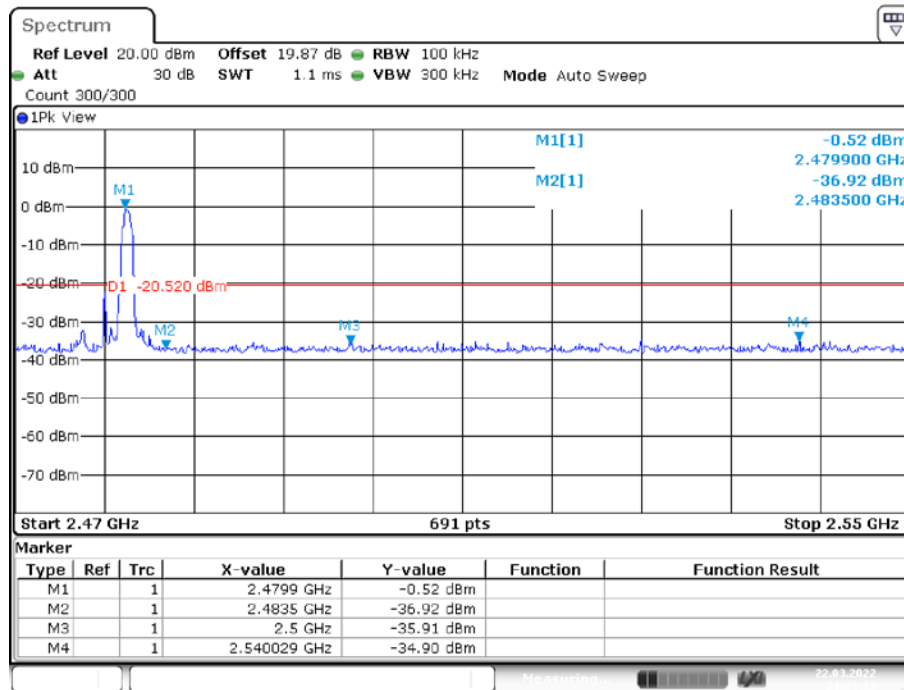


Date: 22.MAR.2022 21:23:33

2DH1_Ant2_Low_Hop_2402

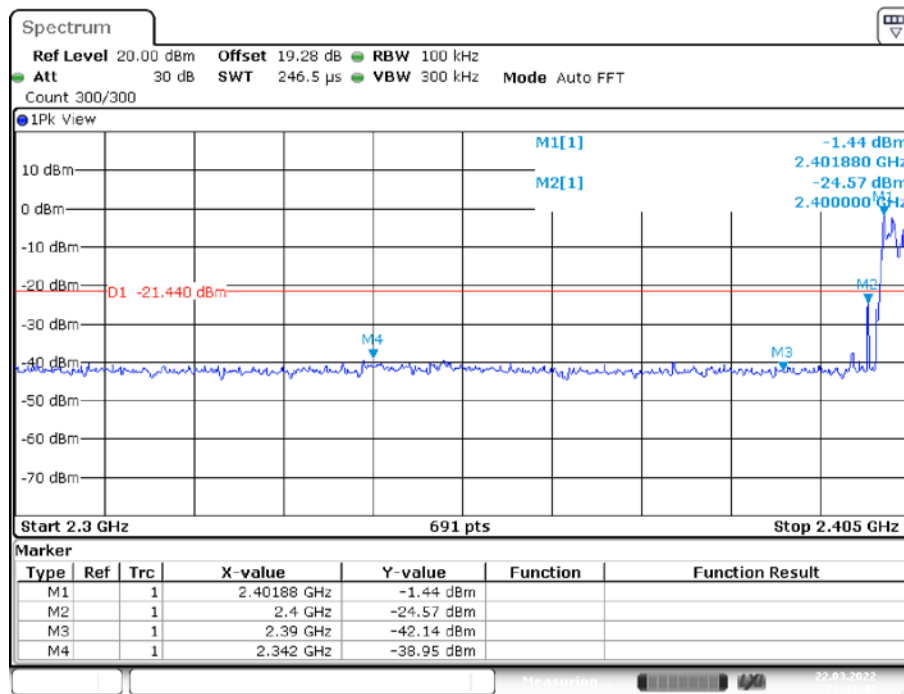

Date: 22.MAR.2022 21:29:42

2DH1_Ant2_High_Hop_2480

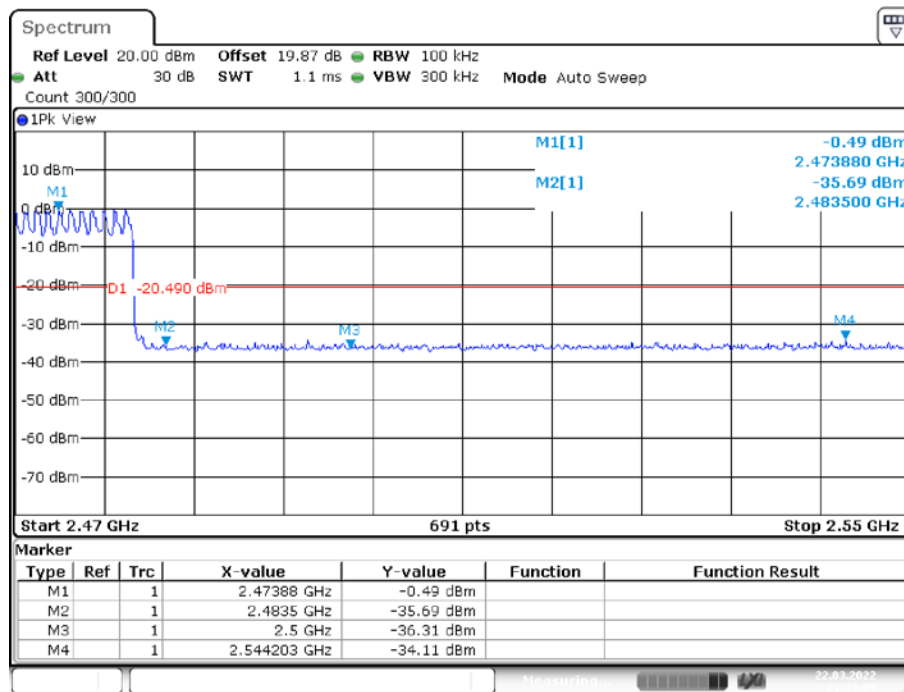

Date: 22.MAR.2022 21:34:06

***** END OF REPORT *****