

FCC Appendix RF Test Data

FCC ID : 2BMDX-A40N-14-WB

Company: : Aixin Green Energy (Zhejiang) Technology Co.,Ltd

EUT : Portable Electric Vehicle Charger

Model Number : PX-US-A40N-14-WB

Report No. : CTA25041600202

Reviewed By : Eric Wang

Appendix A: DTS Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.600	2406.960	2416.560	0.5	PASS
		2437	9.560	2432.000	2441.560	0.5	PASS
		2462	9.560	2456.960	2466.520	0.5	PASS
11G	Ant1	2412	15.760	2404.440	2420.200	0.5	PASS
		2437	15.720	2429.440	2445.160	0.5	PASS
		2462	16.040	2454.120	2470.160	0.5	PASS
11N20SISO	Ant1	2412	16.240	2404.360	2420.600	0.5	PASS
		2437	15.880	2429.480	2445.360	0.5	PASS
		2462	16.800	2453.840	2470.640	0.5	PASS

Test Graphs

11B_Ant1_2412



11B_Ant1_2437




11B_Ant1_2462



11G_Ant1_2412



11G_Ant1_2437

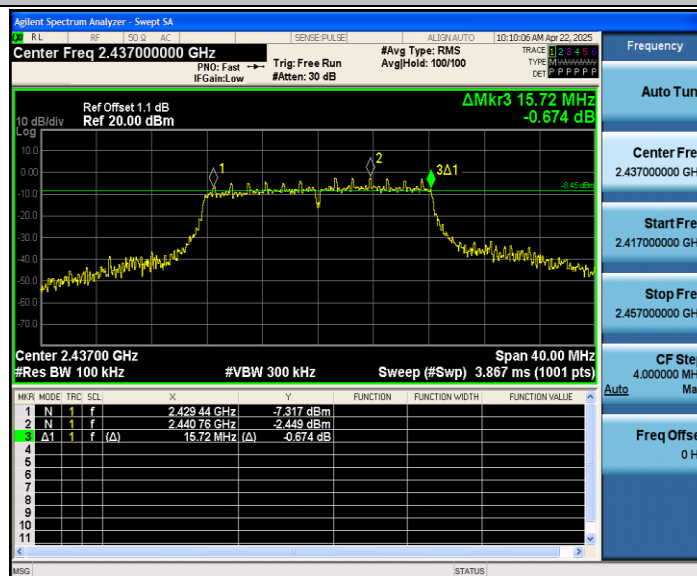

11G_Ant1_2462



11N20SISO_Ant1_2412



11N20SISO_Ant1_2437



11N20SISO_Ant1_2462




Appendix B: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	12.398	2405.7436	2418.1416	---	---
		2437	11.690	2430.9924	2442.6824	---	---
		2462	12.729	2455.4346	2468.1636	---	---
11G	Ant1	2412	16.757	2403.7658	2420.5228	---	---
		2437	16.735	2428.7797	2445.5147	---	---
		2462	16.905	2453.6587	2470.5637	---	---
11N20SISO	Ant1	2412	17.854	2403.2327	2421.0867	---	---
		2437	17.661	2428.3035	2445.9645	---	---
		2462	17.985	2453.1308	2471.1158	---	---

Test Graphs

11B_Ant1_2412

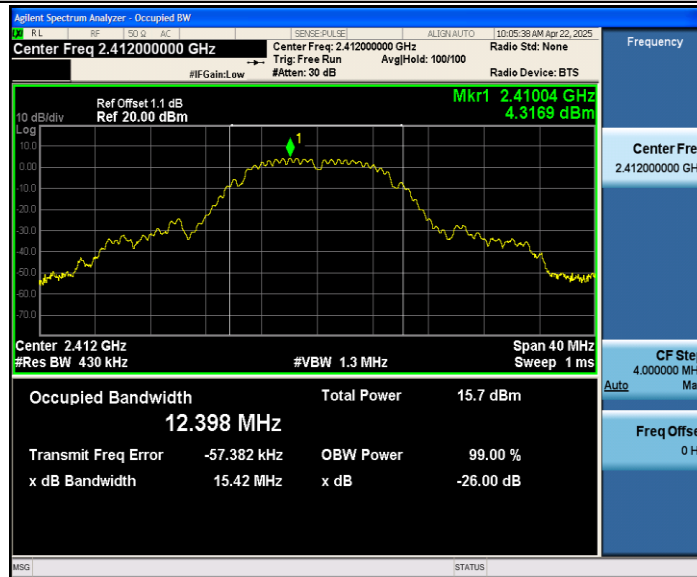


11B_Ant1_2437




11B_Ant1_2462




11G_Ant1_2412

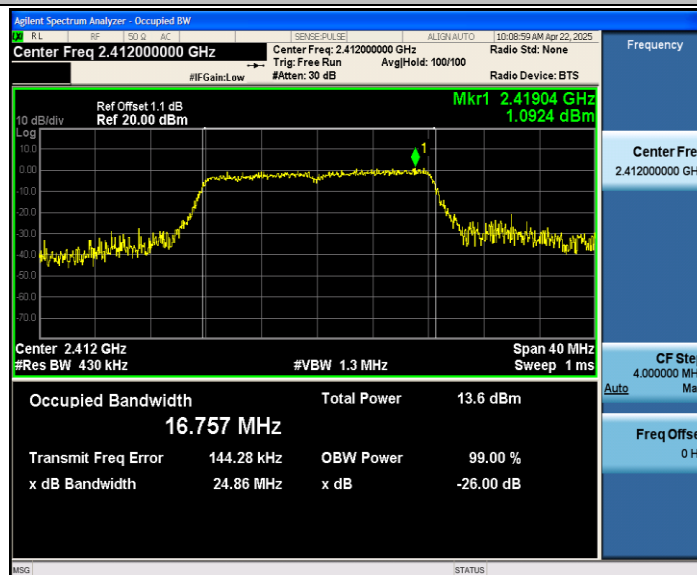


11G_Ant1_2437

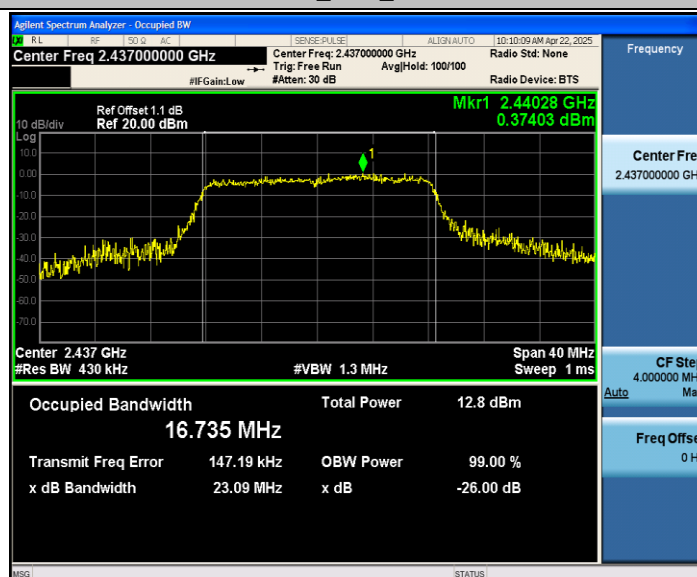

11G_Ant1_2462

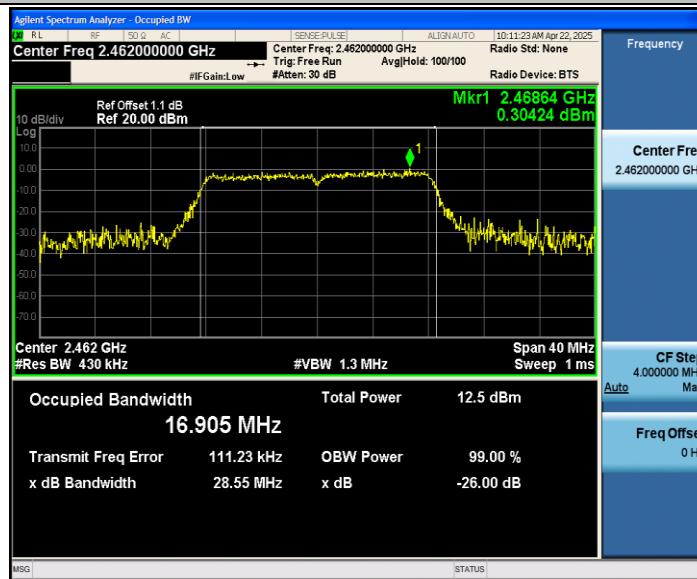


11N20SISO_Ant1_2412

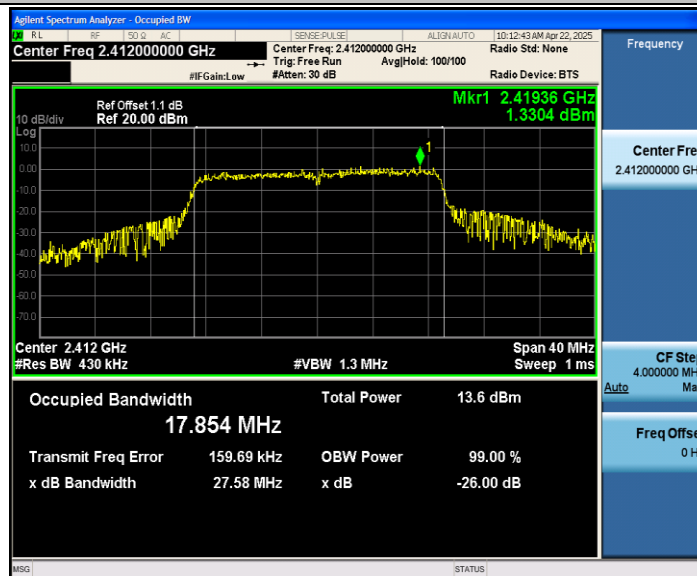

11N20SISO_Ant1_2437



11N20SISO_Ant1_2462

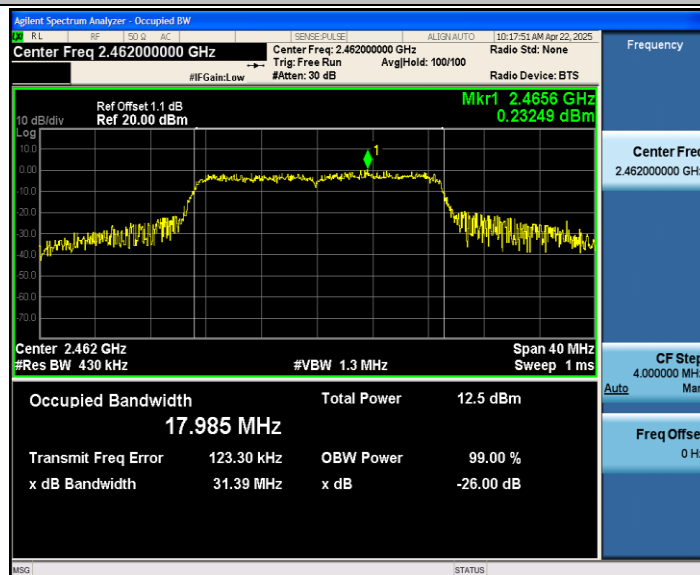

Appendix C: Maximum conducted output power

Test Result Peak

Test Mode	Antenna	Frequency[MHz]	Peak power [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	15.57	≤30.00	PASS
		2437	14.47	≤30.00	PASS
		2462	14.52	≤30.00	PASS
11G	Ant1	2412	14.20	≤30.00	PASS
		2437	13.55	≤30.00	PASS
		2462	13.05	≤30.00	PASS
11N20SISO	Ant1	2412	14.05	≤30.00	PASS
		2437	13.28	≤30.00	PASS
		2462	13.07	≤30.00	PASS

Appendix D: Maximum power spectral density

Test Result

TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-10.47	≤8.00	PASS
		2437	-10.31	≤8.00	PASS
		2462	-10.61	≤8.00	PASS
11G	Ant1	2412	-17.56	≤8.00	PASS
		2437	-18.30	≤8.00	PASS
		2462	-18.28	≤8.00	PASS
11N20SISO	Ant1	2412	-18.04	≤8.00	PASS
		2437	-18.88	≤8.00	PASS
		2462	-18.56	≤8.00	PASS

Test Graphs

11B_Ant1_2412




11B_Ant1_2437




11B_Ant1_2462




11G_Ant1_2412

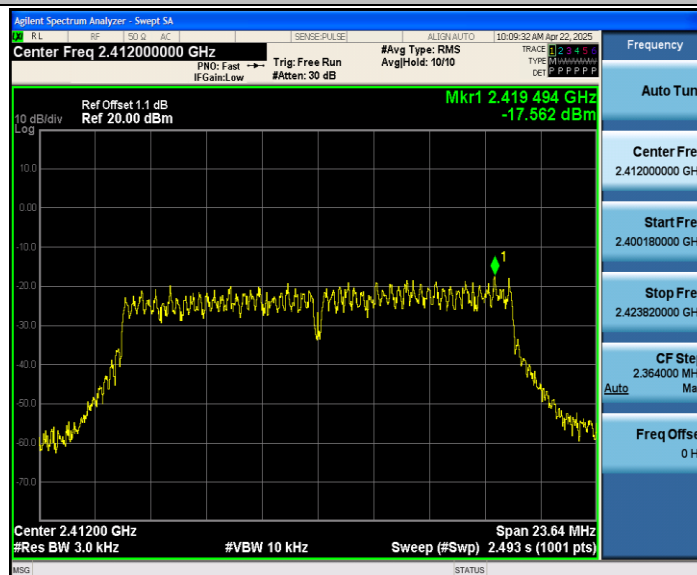


11G_Ant1_2437

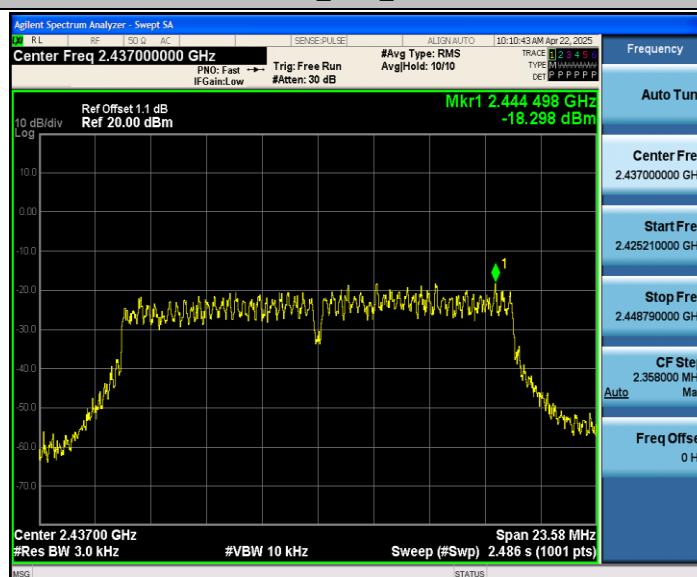

11G_Ant1_2462

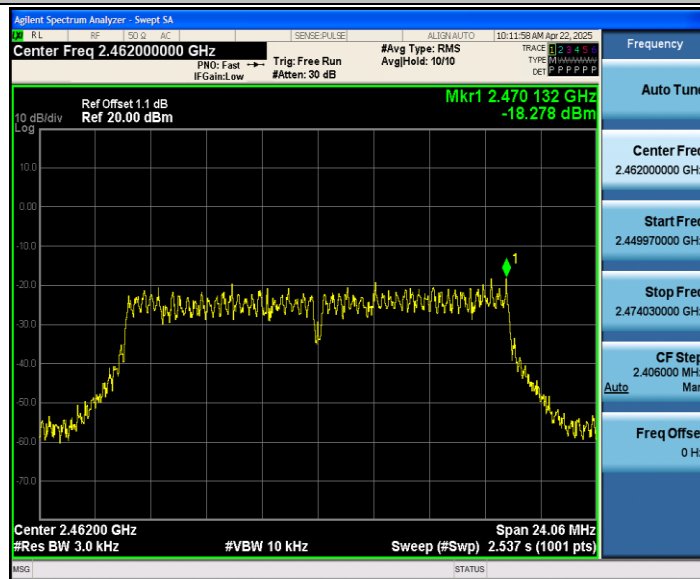


11N20SISO_Ant1_2412

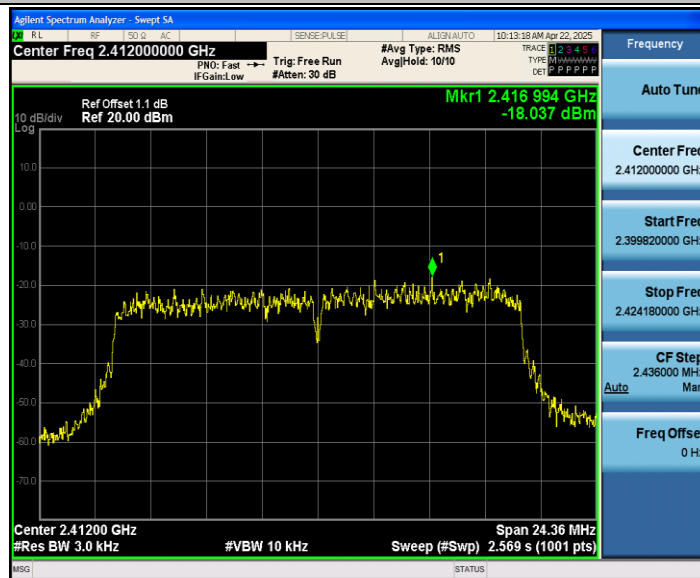

11N20SISO_Ant1_2437



11N20SISO_Ant1_2462

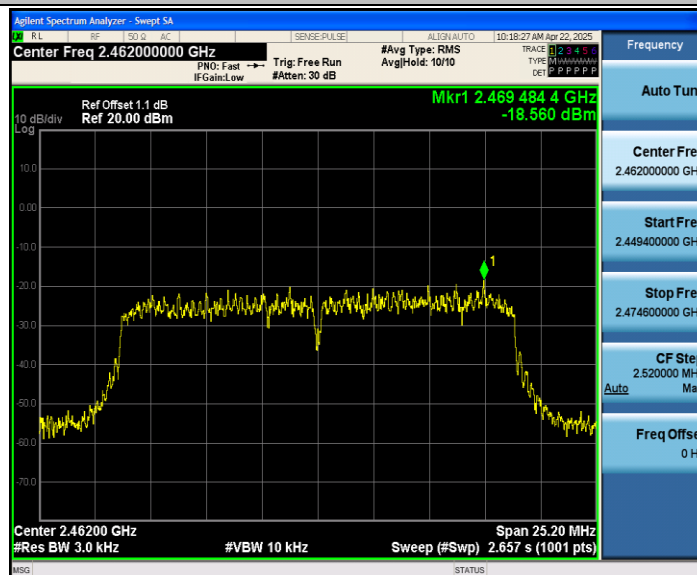


Appendix E: Band edge measurements

Test Result


TestMode	Antenna	Channel Name	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	4.20	-34.1	≤-15.8	PASS
		High	2462	3.00	-49.48	≤-17	PASS
11G	Ant1	Low	2412	-1.56	-35.97	≤-21.56	PASS
		High	2462	-2.88	-38.56	≤-22.88	PASS
11N20SISO	Ant1	Low	2412	-1.55	-35.94	≤-21.55	PASS
		High	2462	-2.89	-40.49	≤-22.89	PASS

Test Graphs

11B_Ant1_Low_2412

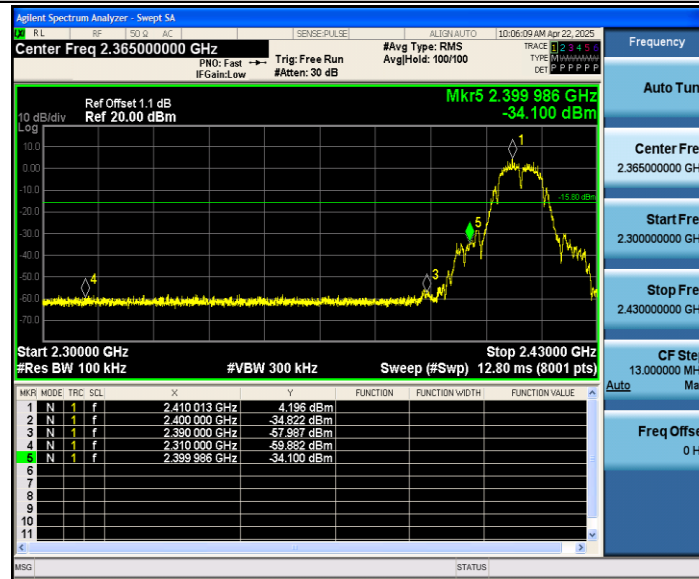


11B_Ant1_High_2462

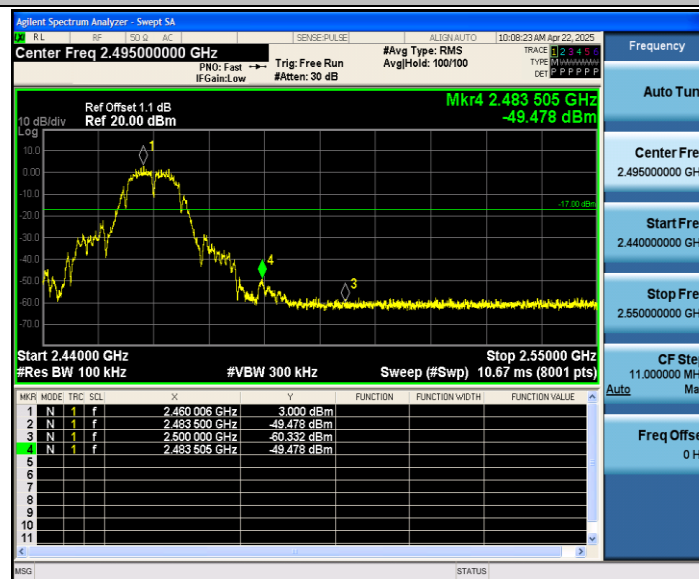


11G_Ant1_Low_2412




11G_Ant1_High_2462

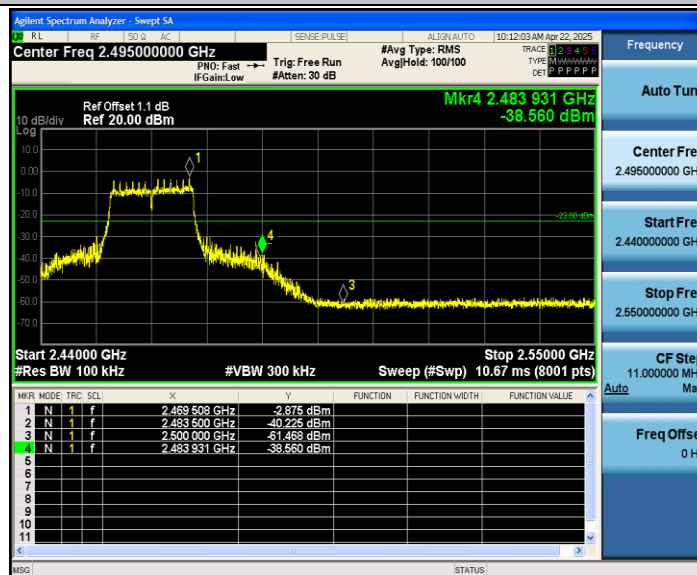

11N20SISO_Ant1_Low_2412

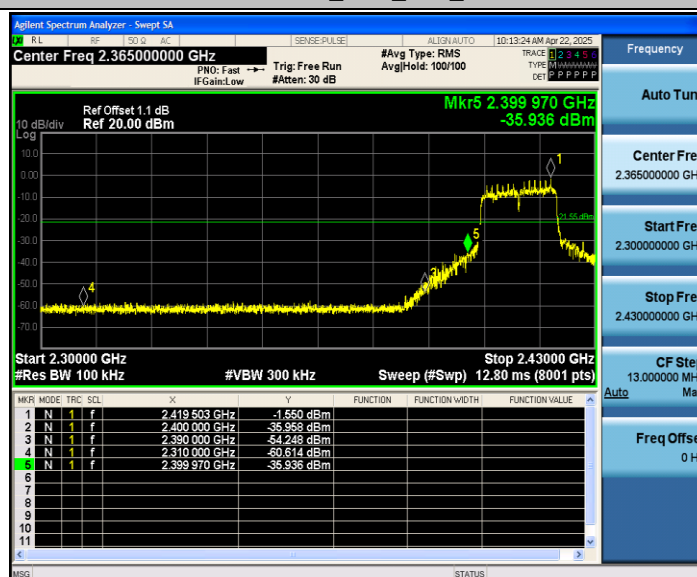

11N20SISO_Ant1_High_2462

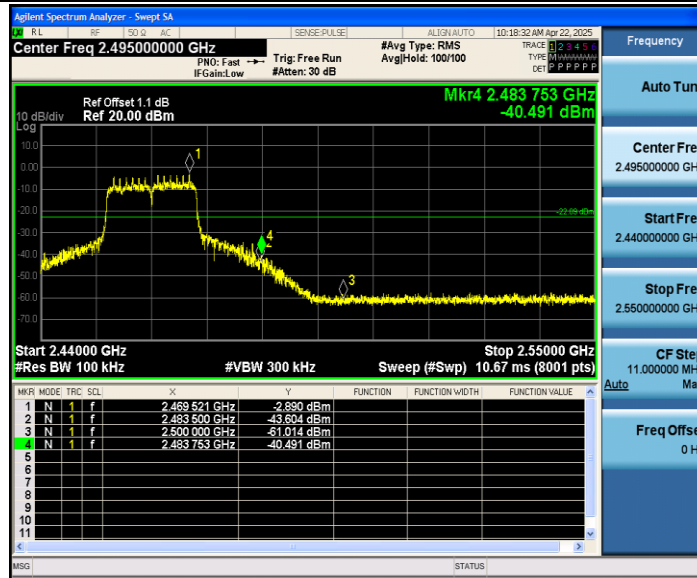

Appendix F: Conducted Spurious Emission

Test Result


TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	3.85	3.85	---	PASS
			30~1000	3.85	-68.22	≤-16.15	PASS
			1000~26500	3.85	-38.53	≤-16.15	PASS
		2437	Reference	2.80	2.80	---	PASS
			30~1000	2.80	-67.44	≤-17.2	PASS
			1000~26500	2.80	-36.99	≤-17.2	PASS
		2462	Reference	3.04	3.04	---	PASS
			30~1000	3.04	-67.48	≤-16.96	PASS
			1000~26500	3.04	-30.78	≤-16.96	PASS
11G	Ant1	2412	Reference	-1.26	-1.26	---	PASS
			30~1000	-1.26	-67.41	≤-21.26	PASS
			1000~26500	-1.26	-53.91	≤-21.26	PASS
		2437	Reference	-1.62	-1.62	---	PASS
			30~1000	-1.62	-67.54	≤-21.62	PASS
			1000~26500	-1.62	-48.73	≤-21.62	PASS
		2462	Reference	-1.66	-1.66	---	PASS
			30~1000	-1.66	-67.79	≤-21.66	PASS
			1000~26500	-1.66	-44.49	≤-21.66	PASS
11N20SISO	Ant1	2412	Reference	-0.15	-0.15	---	PASS
			30~1000	-0.15	-67.36	≤-20.15	PASS
			1000~26500	-0.15	-51.27	≤-20.15	PASS
		2437	Reference	-1.89	-1.89	---	PASS
			30~1000	-1.89	-67.89	≤-21.89	PASS
			1000~26500	-1.89	-45.03	≤-21.89	PASS
		2462	Reference	-1.60	-1.60	---	PASS
			30~1000	-1.60	-66.81	≤-21.6	PASS
			1000~26500	-1.60	-44.48	≤-21.6	PASS

Test Graphs


11B_Ant1_2412_0~Reference



11B_Ant1_2412_30~1000

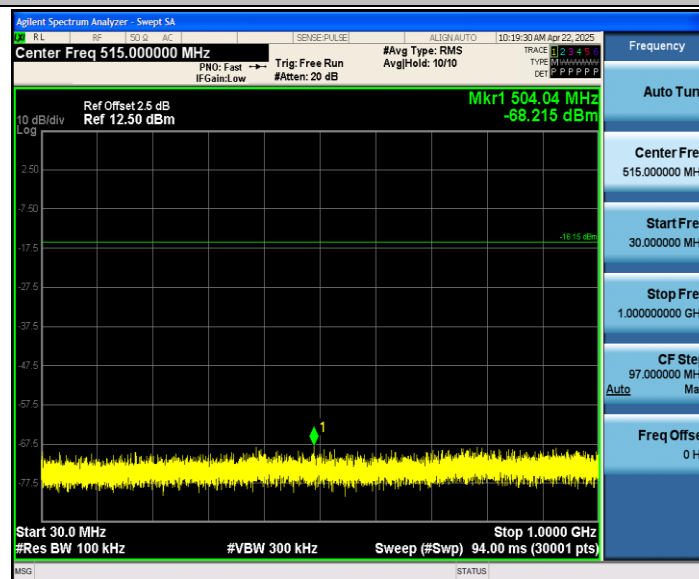


11B_Ant1_2412_1000~26500

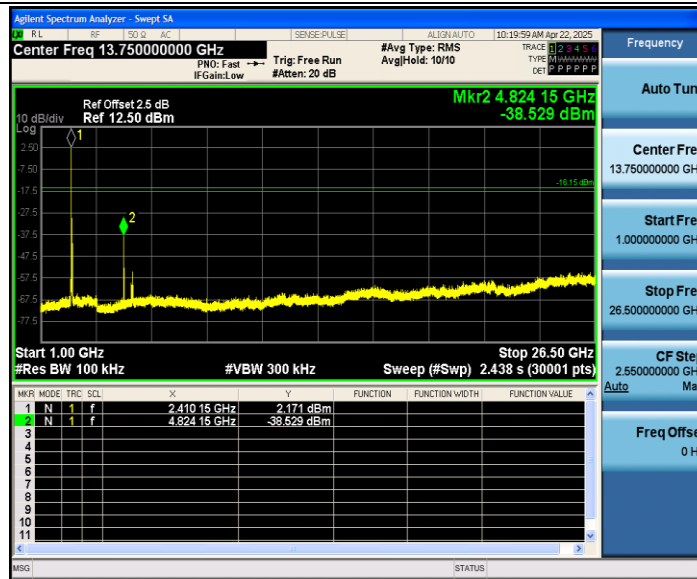


11B_Ant1_2437_0~Reference



11B_Ant1_2437_30~1000

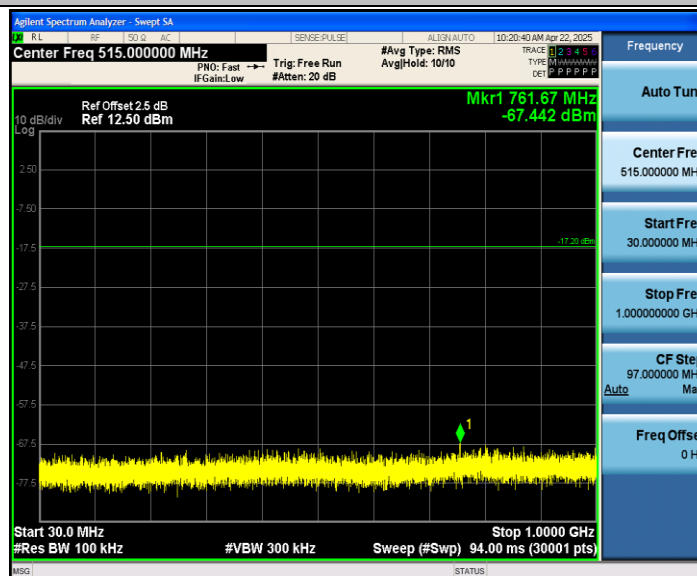


11B_Ant1_2437_1000~26500

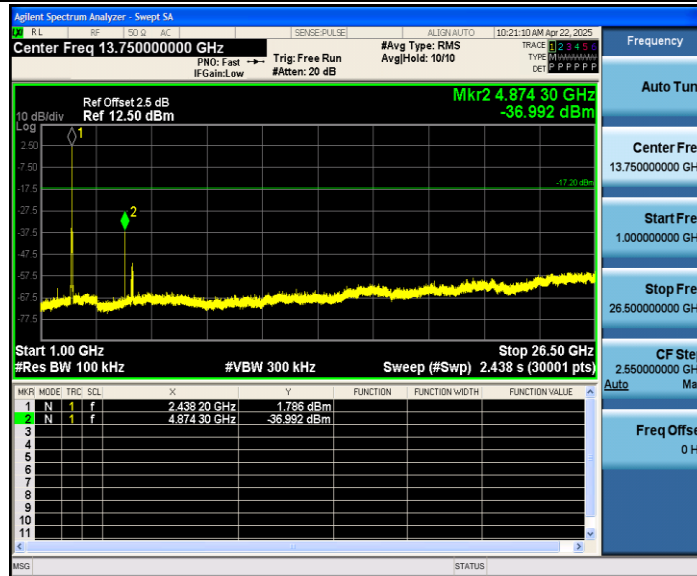


11B_Ant1_2462_0~Reference




11B_Ant1_2462_30~1000

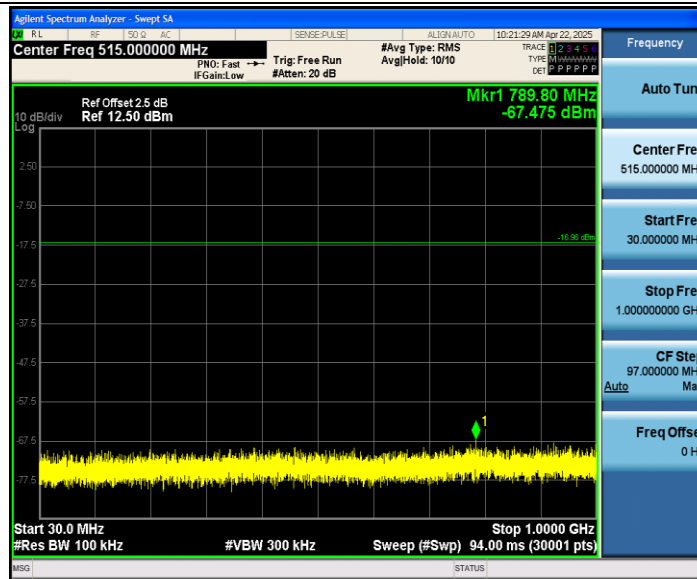


11B_Ant1_2462_1000~26500

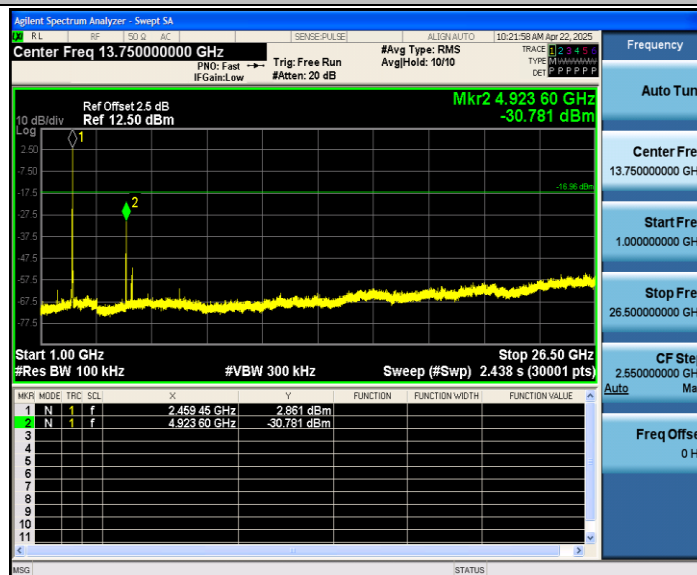


11G_Ant1_2412_0~Reference

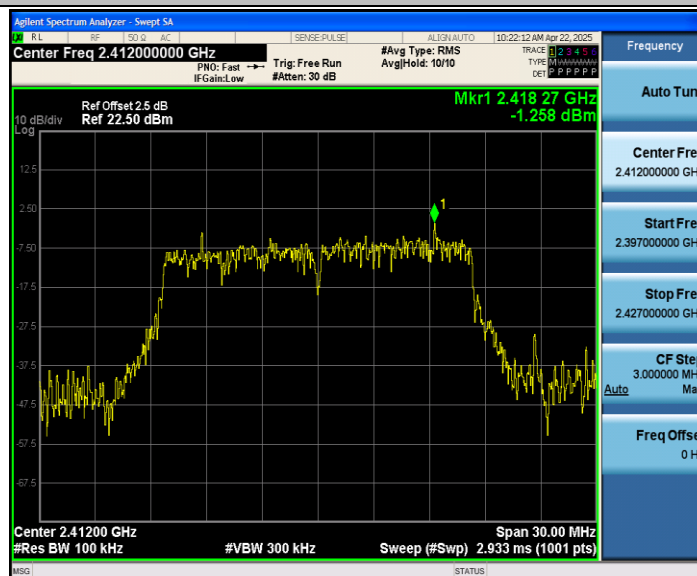

11G_Ant1_2412_30~1000

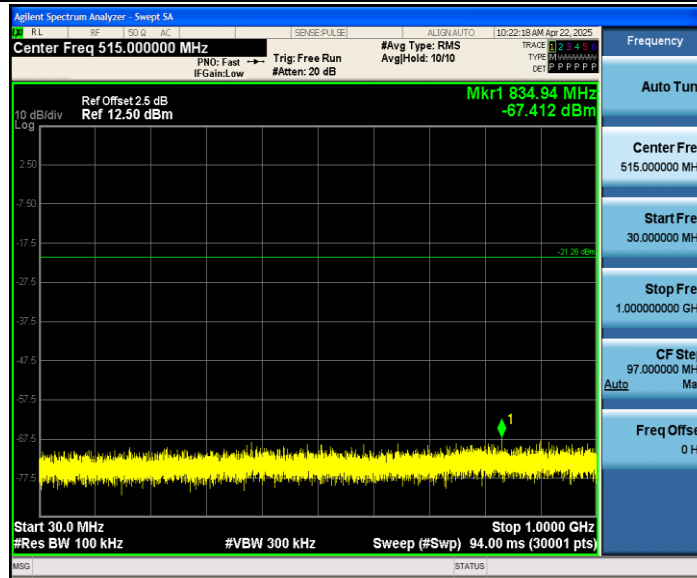


11G_Ant1_2412_1000~26500

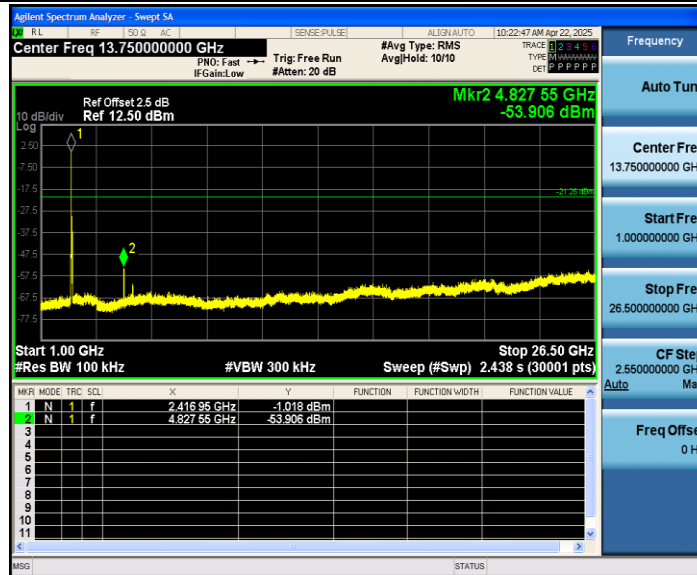


11G_Ant1_2437_0~Reference




11G_Ant1_2437_30~1000

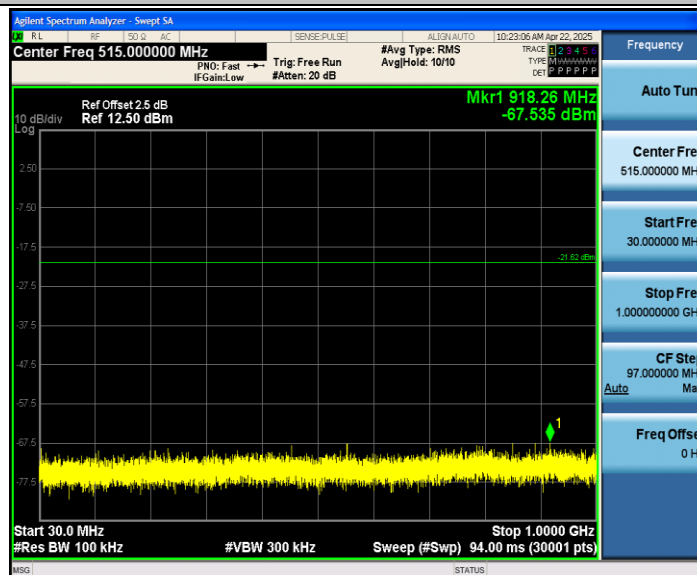


11G_Ant1_2437_1000~26500

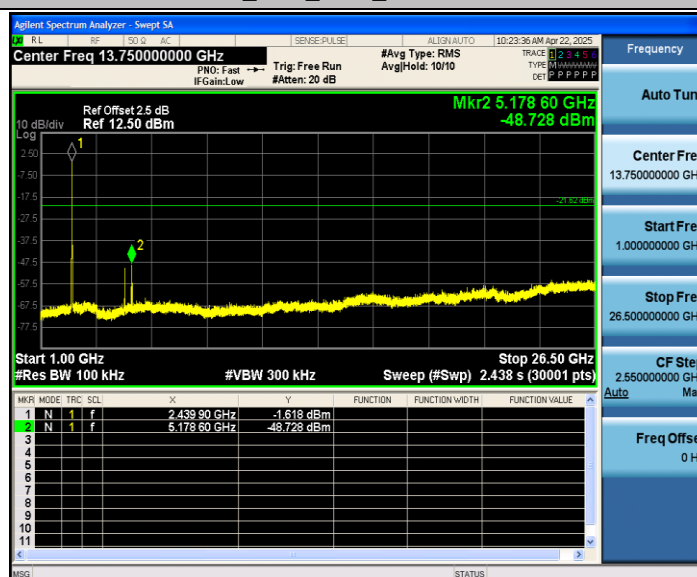


11G_Ant1_2462_0~Reference

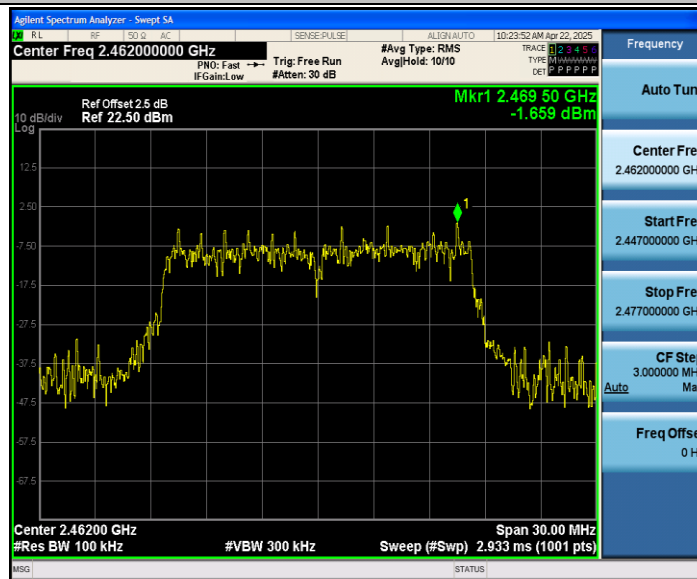


11G_Ant1_2462_30~1000

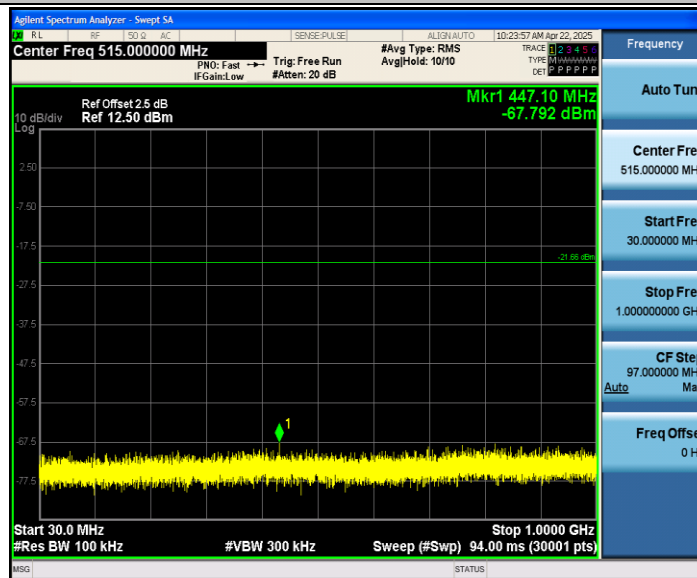

11G_Ant1_2462_1000~26500

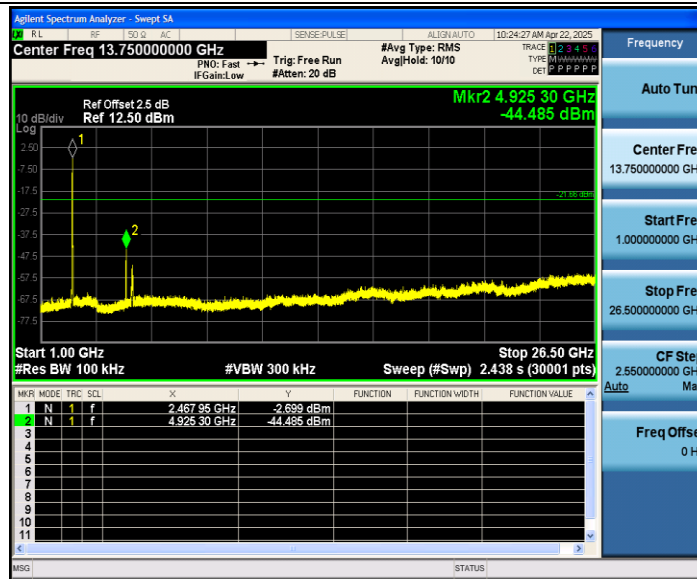

11N20SISO_Ant1_2412_0~Reference

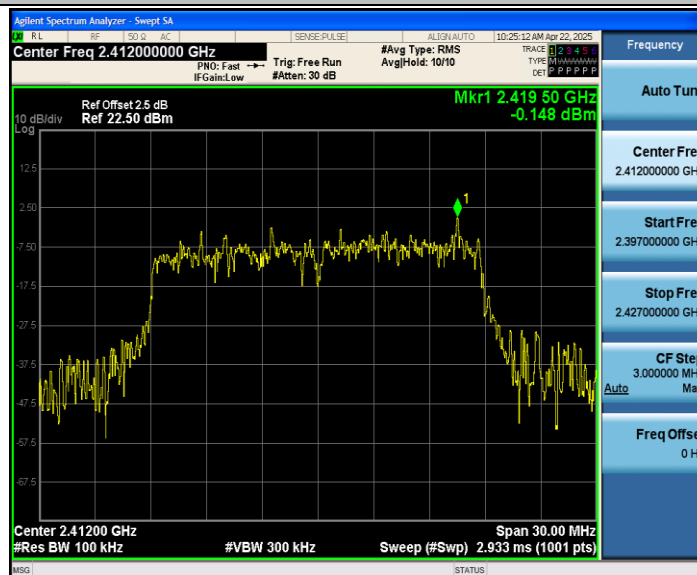

11N20SISO_Ant1_2412_30~1000

