



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

FCC PART 22/24 TEST REPORT

FCC Part 22 /Part 24

Report Reference No.....: CTA25081801101

FCC ID.....: 2BMOX-X1

Compiled by

(position+printed name+signature) : File administrators Zoey Cao

Zoey Cao

Supervised by

(position+printed name+signature) : Project Engineer Ace Chai

Ace Chai

Approved by

(position+printed name+signature) : RF Manager Eric Wang

Eric Wang

Date of issue.....: Sep. 12, 2025

Testing Laboratory Name: Shenzhen CTA Testing Technology Co., Ltd.

Address: Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name.....: Shenzhen Wufang Technology Co., Ltd.

Address: 701-15 Jiangnan Building, No. 21 Yongxiang Road East, Ma'antang Community, Bantian Street, Longgang District Shenzhen Guangdong, China

Test specification

Standard: FCC Part 22: PUBLIC MOBILE SERVICES
FCC Part 24: PERSONAL COMMUNICATIONS SERVICES

Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Tablet

Trade Mark: FUFI

Manufacturer: Shenzhen Wufang Technology Co., Ltd.

Model/Type reference: X1

Listed Models: X1 Pro, X2, X2 Pro, X3, X3 Pro

Ratings: Input: 5V---2A

Battery: 3.85V 5000mAh 19.25Wh

Frequency.....: GSM 850MHz; PCS 1900MHz;

Modulation: GMSK

GPRS: Supported

Result: PASS

TEST REPORT

Equipment under Test : Tablet

Model /Type : X1

Listed Models : X1 Pro, X2, X2 Pro, X3, X3 Pro

Model difference : The PCB board, circuit, structure and internal of these models are the same, Only model number and colour is different for these model.

Applicant : **Shenzhen Wufang Technology Co., Ltd.**

Address : 701-15 Jiangnan Building, No. 21 Yongxiang Road East, Ma'antang Community, Bantian Street, Longgang District Shenzhen Guangdong, China

Manufacturer : **Shenzhen Wufang Technology Co., Ltd.**

Address : 701-15 Jiangnan Building, No. 21 Yongxiang Road East, Ma'antang Community, Bantian Street, Longgang District Shenzhen Guangdong, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1	TEST STANDARDS.....	4
2	SUMMARY	5
2.1	General Remarks	5
2.2	Product Description	5
2.3	Equipment under Test	5
2.4	Short description of the Equipment under Test (EUT)	5
2.5	EUT configuration.....	6
2.6	Related Submittal(s) / Grant (s).....	6
2.7	Modifications.....	6
2.8	General Test Conditions/Configurations	6
2.9	Modifications.....	6
3	TEST ENVIRONMENT	7
3.1	Address of the test laboratory.....	7
3.2	Test Facility	7
3.3	Statement of the measurement uncertainty	7
3.4	Environmental conditions	8
3.5	Test Description.....	8
3.6	Equipments Used during the Test.....	9
4	TEST CONDITIONS AND RESULTS	10
4.1	Output Power.....	10
4.2	Radiated Spurious Emission	15
4.3	Occupied Bandwidth and Emission Bandwidth	18
4.4	Band Edge Complicance	25
4.5	Spurious Emission on Antenna Port	30
4.6	Frequency Stability Test.....	60
4.7	Peak-to-Average Ratio (PAR)	63
5	Test Setup Photos of the EUT	70
6	External and Internal Photos of the EUT	70

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[FCC Part 22 Subpart H](#): PRIVATE LAND MOBILE RADIO SERVICES.

[FCC Part 24 Subpart E](#): PUBLIC MOBILE SERVICES

[ANSI/TIA-603-E-2016](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[ANSI C63.26-2015](#): IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[FCC KDB971168D01](#) Power Meas License Digital Systems

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	Aug. 18, 2025
Testing commenced on	:	Aug. 18, 2025
Testing concluded on	:	Sep. 12, 2025

2.2 Product Description

Product Name:	Tablet
Model/Type reference:	X1
Power supply:	Input: 5V $\overline{\text{---}}$ 2A Battery: 3.85V 5000mAh 19.25Wh
Hardware version:	C30_VS6.2
Software version:	Fuffi_Tablet_20250808
Testing sample ID:	CTA250818011-1# (Engineer sample) CTA250818011-2# (Normal sample)
Modulation Type	GMSK for GSM/GPRS; GMSK/8PSK for EGPRS
Antenna Type	PIFA Antenna
GSM/EDGE/GPRS	Supported GSM/GPRS/ EGPRS
GSM/GPRS Power Class	GSM850:Power Class 4/ PCS1900:Power Class 1
GSM/GPRS Operation Frequency	GSM850 :824.2MHz-848.8MHz/PCS1900:1850.2MHz-1909.8MHz
GPRS Operation Frequency Band	GPRS850/GPRS1900
GPRS Multislot Class	Multi-slot Class 12
Extreme temp. Tolerance	-30°C to +50°C
GPRS operation mode	Class B
Antenna Type:	PIFA Antenna
Antenna Gain:	-0.79dBi (max.) For GSM 850 0.57dBi (max.) For PCS 1900

2.3 Equipment under Test

Power supply system utilised

Power supply voltage	☒ Other (Refer to section 2.2)
----------------------	---

Test frequency list

Test Mode	TX/RX	RF Channel		
		Low(L)	Middle (M)	High (H)
GPRS 850	TX	Channel 128	Channel 190	Channel 251
		824.2 MHz	836.6 MHz	848.8 MHz
	RX	Channel 128	Channel 190	Channel 251
		869.2 MHz	881.6 MHz	893.8 MHz
Test Mode	TX/RX	RF Channel		
		Low(L)	Middle (M)	High (H)
GPRS 1900	TX	Channel 512	Channel 661	Channel 810
		1850.2 MHz	1880.0 MHz	1909.8 MHz
	RX	Channel 512	Channel 661	Channel 810
		1930.2 MHz	1960.0 MHz	1989.8 MHz

2.4 Short description of the Equipment under Test (EUT)

This is a Tablet.

For more details, refer to the user's manual of the EUT.

2.5 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○ Adapter information (Auxiliary test supplied by test Lab)		Model: EP-TA20CBC Input: AC 100-240V 50/60Hz Output: DC 5V 2A
--	--	---

2.6 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is filing to comply with FCC Part 22 and Part 24 Rules

2.7 Modifications

No modifications were implemented to meet testing criteria.

2.8 General Test Conditions/Configurations

2.8.1 Test Modes

NOTE: The test mode(s) are selected according to relevant radio technology specifications.

Test Mode 1	GSM
Test Mode 2	GPRS

2.8.2 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	3.40V
	VN	3.85V
	VH	4.20V

NOTE: VL=lower extreme test voltage VN=nominal voltage
VH=upper extreme test voltage TN=normal temperature

2.9 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 517856 Designation Number: CN1318

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6534.01

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

ISED#: 27890 CAB identifier: CN0127

Shenzhen CTA Testing Technology Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen CTA Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen CTA Testing Technology Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	9KHz~30MHz	3.02 dB	(1)
Radiated Emission	30~1000MHz	4.06 dB	(1)
Radiated Emission	1~18GHz	5.14 dB	(1)
Radiated Emission	18-40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.14 dB	(1)
Output Peak power	30MHz~18GHz	0.55 dB	(1)
Power spectral density	/	0.57 dB	(1)
Spectrum bandwidth	/	1.1%	(1)
Radiated spurious emission (30MHz-1GHz)	30~1000MHz	4.10 dB	(1)
Radiated spurious emission (1GHz-18GHz)	1~18GHz	4.32 dB	(1)
Radiated spurious emission (18GHz-40GHz)	18-40GHz	5.54 dB	(1)
Time	/	±2%	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

3.4 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.5 Test Description

3.5.1 Cellular Band (824-849MHz paired with 869-894MHz)

Test Item	FCC Rule No.	Requirements	Verdict
Effective(Isotropic) Radiated Output Power	§2.1046, §22.913	FCC: ERP $\leq$ 7W.	Pass
Modulation Characteristics	§2.1047	Digital modulation	N/A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §22.917	$\leq$ -13dBm/1%*EBW, in 1MHz bands immediately outside and adjacent to The frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917	FCC: $\leq$ -13dBm/100kHz, from 9kHz to 10th harmonics but outside authorized operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917	FCC: $\leq$ -13dBm/100kHz.	Pass
Frequency Stability	§2.1055, §22.355	$\leq \pm 2.5$ ppm.	Pass

NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" de notes "not tested".

3.5.2 PCS Band (1850-1915MHz paired with 1930-1995MHz)

Test Item	FCC Rule No.	Requirements	Verdict
Effective(Isotropic) Radiated Output Power	§2.1046, §24.232	EIRP $\leq$ 2W	Pass
Peak-Average Ratio	§2.1046, §24.232	FCC: Limits $\leq$ 13dB	Pass
Modulation Characteristics	§2.1047	Digital modulation	N/A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §24.238	$\leq$ -13dBm/1%*EBW, In 1MHz bands immediately outside and adjacent to The frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238	$\leq$ -13dBm/1MHz, from 9kHz to 10th harmonics but outside authorized Operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238	$\leq$ -13dBm/1MHz.	Pass
Frequency Stability	§2.1055, §24.235	FCC: within authorized frequency block.	Pass

NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" de notes "not tested".

Remark:

1. The measurement uncertainty is not included in the test result.

3.6 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Equipment No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	CTA-308	2025/08/04	2026/08/03
LISN	R&S	ENV216	CTA-314	2025/07/30	2026/07/29
EMI Test Receiver	R&S	ESPI	CTA-307	2025/07/30	2026/07/29
EMI Test Receiver	R&S	ESCI	CTA-306	2025/07/30	2026/07/29
Spectrum Analyzer	Agilent	N9020A	CTA-301	2025/07/30	2026/07/29
Vector Signal generator	Agilent	N5182A	CTA-305	2025/07/30	2026/07/29
Analog Signal Generator	R&S	E4421B	CTA-304	2025/07/30	2026/07/29
WIDEBAND RADIO COMMUNICATION TESTER	CMW500	R&S	CTA-302	2025/07/30	2026/07/29
Temperature and humidity meter	Chigo	ZG-7020	CTA-326	2025/07/31	2026/07/30
Ultra-Broadband Antenna	Schwarzbeck	VULB9163	CTA-310	2023/10/17	2026/10/16
Horn Antenna	Schwarzbeck	BBHA 9120D	CTA-309	2023/10/13	2026/10/12
Loop Antenna	Zhinan	ZN30900C	CTA-311	2023/10/17	2026/10/16
Horn Antenna	Schwarzbeck	BBHA 9170	CTA-346	2025/05/18	2028/05/17
Amplifier	Schwarzbeck	BBV9745	CTA-312	2025/07/30	2026/07/29
Amplifier	Tonscend	TAP-011840	CTA-313	2025/07/30	2026/07/29
High-Pass Filter	XingBo	XBLBQ-GTA18	CTA-402	2025/07/30	2026/07/29
High-Pass Filter	XingBo	XBLBQ-GTA27	CTA-403	2025/07/30	2026/07/29
Automatic control unit	Tonscend	JS0806-2	CTA-404	2025/07/30	2026/07/29
Power Sensor	Agilent	U2021XA	CTA-405	2025/07/30	2026/07/29
Amplifier	SKET	LNPA 1840G-50	CTA-345	2025/05/17	2026/05/16
Spectrum analyzer	R&S	FSV40-N	CTA-344	2025/05/17	2026/05/16
Power Meter	R&S	NRVS	CTA-354	2025/07/30	2026/07/29
Attenuator	XINQY	10dB	N/A	N/A	N/A
Programmable Constant Temperature And Humidity Test Chamber	DONGGUAN JINGYU	HT-H-408	CTA-053	2025/07/30	2026/07/29
EMI Test Software	Tonscend	TS@JS32-RE	5.0.0.2	N/A	N/A
EMI Test Software	Tonscend	TS@JS32-CE	5.0.0.1	N/A	N/A
RF Test Software	Tonscend	TS@JS1120-3	3.1.65	N/A	N/A
RF Test Software	Tonscend	TS@JS1120	3.1.46	N/A	N/A

4 TEST CONDITIONS AND RESULTS


4.1 Output Power

TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

4.1.1 Conducted Output Power

TEST CONFIGURATION

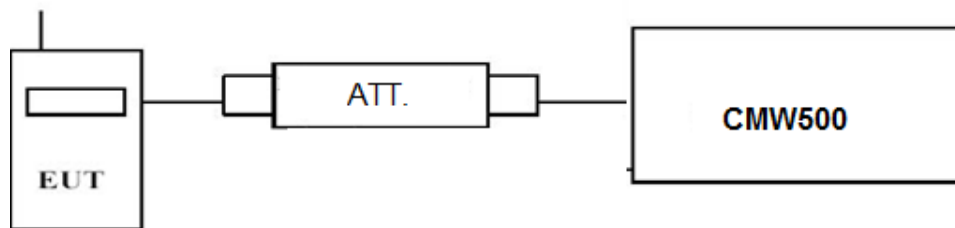

TEST PROCEDURE

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display CMW500, and then test.

GSM850				
Function	Power step	Nominal output power (dBm)	Power & Multislot class	Operation class
GSM	5	33dBm(2W)	4	/
GPRS	3	33dBm(2W)	12	B
EGPRS	8	33dBm(2W)	12	B

PCS1900				
Function	Power step	Nominal output power (dBm)	Power & Multislot class	Operation class
GSM	0	30dBm(1W)	1	/
GPRS	3	30dBm(1W)	12	B
EGPRS	2	30dBm(1W)	12	B

TEST RESULTS

GSM 850		Burst Average Conducted power (dBm)		
		Channel/Frequency(MHz)		
		128/824.2	190/836.6	251/848.8
GSM		32.14	32.22	31.84
GPRS (GMSK)	1TX slot	31.26	32.32	32.27
	2TX slot	31.57	30.41	31.27
	3TX slot	29.66	29.64	29.30
	4TX slot	28.61	28.96	27.12
EDGE (8PSK)	1TX slot	26.77	26.99	26.72
	2TX slot	25.12	24.31	24.38
	3TX slot	22.73	23.86	22.66
	4TX slot	21.47	21.68	21.14

PCS 1900		Burst Average Conducted power (dBm)		
		Channel/Frequency(MHz)		
		512/1850.2	661/1880	810/1909.8
GSM		29.71	29.50	29.58
GPRS (GMSK)	1TX slot	29.11	29.23	29.36
	2TX slot	28.61	27.61	27.95
	3TX slot	26.68	26.04	26.97
	4TX slot	25.55	25.86	25.05
EDGE (8PSK)	1TX slot	25.99	25.96	25.62
	2TX slot	23.39	23.63	24.89
	3TX slot	22.22	22.67	22.32
	4TX slot	21.21	21.50	21.08


4.1.2 Radiated Output Power

TEST DESCRIPTION

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(e) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

TEST CONFIGURATION

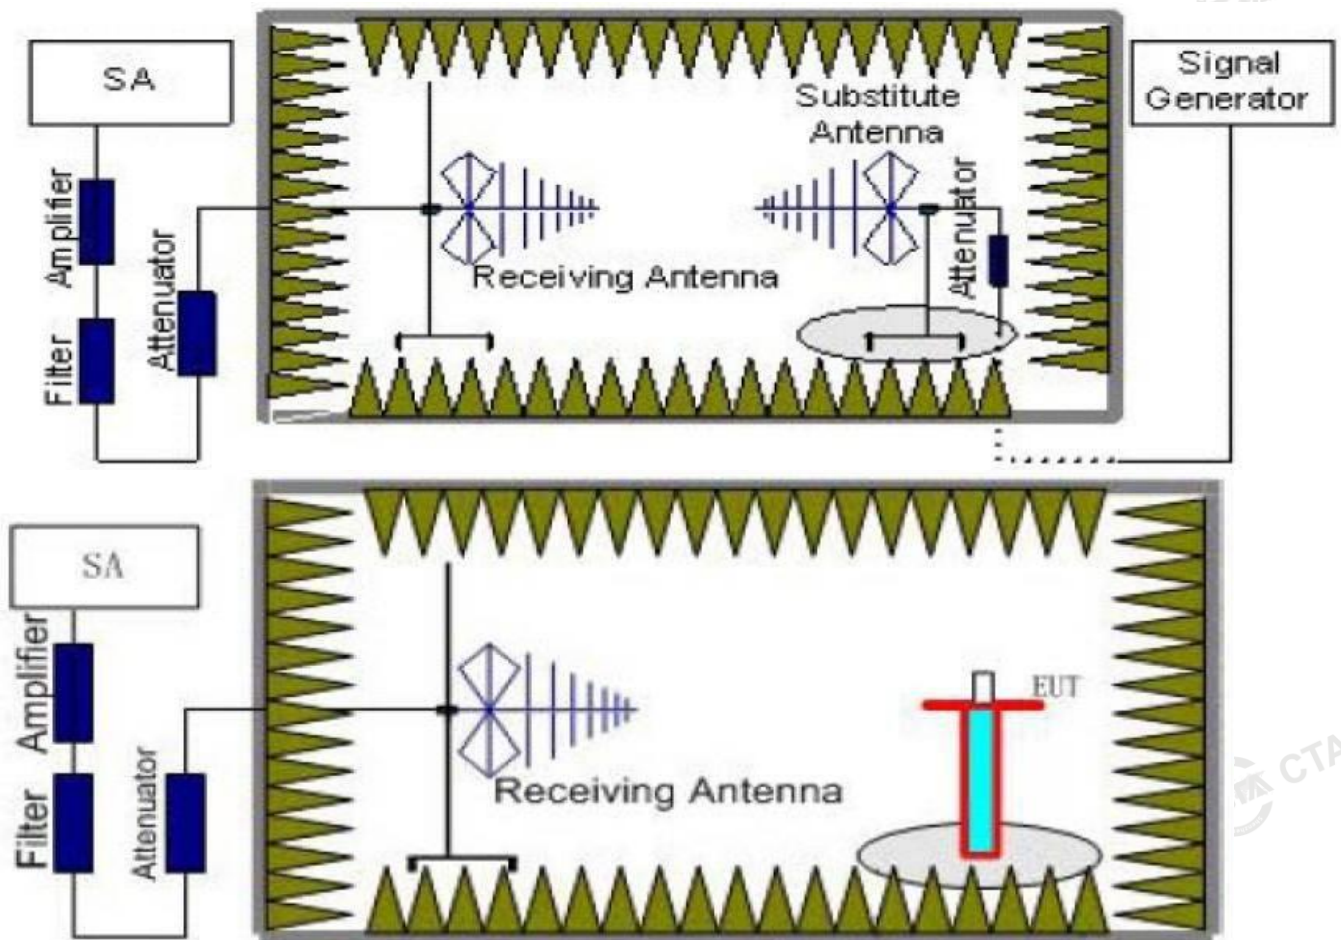

TEST PROCEDURE

1. EUT was placed on a 0.80 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.80m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the

substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$$

We used SMF100A microware signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{cl} + G_a$$

6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

TEST LIMIT

Note: We test the H direction and V direction, V direction is worse.

According to 22.913(a) and 24.232(c), the ERP should be not exceed following table limits:

GSM850(GPRS850,EDGE850)		
Function	Power Step	Burst Peak ERP (dBm)
GSM	5	$\leq 38.45\text{dBm}$ (7W)
GPRS	3	$\leq 38.45\text{dBm}$ (7W)

PCS1900(GPRS1900,EDGE1900)		
Function	Power Step	Burst Peak EIRP (dBm)
GSM	0	$\leq 33\text{dBm}$ (2W)
GPRS	3	$\leq 33\text{dBm}$ (2W)

TEST RESULTS

Remark:

1. We were tested all Configuration refer 3GPP TS151 010.
2. $EIRP = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + P_{Ag}(\text{dB}) + G_a(\text{dBi})$
3. $ERP = EIRP - 2.15\text{dBi}$ as EIRP by subtracting the gain of the dipole.

Note: We tesed Horizontal and Vertical, and Recorded the worst data at the Vertical

GSM 850

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	Correction (dB)	P_{Ag} (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.20	-9.96	2.42	8.45	2.15	36.82	30.74	38.45	-7.71	V
836.60	-9.19	2.46	8.45	2.15	36.82	31.47	38.45	-6.98	V
848.80	-9.97	2.53	8.36	2.15	36.82	30.53	38.45	-7.92	V

GPRS 850

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	Correction (dB)	P_{Ag} (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.20	-8.13	2.42	8.45	2.15	36.82	32.57	38.45	-5.88	V
836.60	-8.13	2.46	8.45	2.15	36.82	32.53	38.45	-5.92	V
848.80	-9.59	2.53	8.36	2.15	36.82	30.91	38.45	-7.54	V

EGPRS 850

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	Correction (dB)	P_{Ag} (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.20	-11.62	3.45	8.45	2.15	36.82	28.05	38.45	-10.40	V
836.60	-15.00	3.49	8.45	2.15	36.82	24.63	38.45	-13.82	V
848.80	-13.83	3.55	8.36	2.15	36.82	25.65	38.45	-12.80	V

GSM 1900

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.20	-11.82	3.41	10.24	33.6	28.61	33.01	-4.40	V
1880.00	-12.47	3.49	10.24	33.6	27.88	33.01	-5.13	V
1909.80	-12.23	3.55	10.23	33.6	28.05	33.01	-4.96	V

GPRS 1900

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.20	-11.12	3.41	10.24	33.6	29.31	33.01	-3.70	V
1880.00	-12.88	3.49	10.24	33.6	27.47	33.01	-5.54	V
1909.80	-11.84	3.55	10.23	33.6	28.44	33.01	-4.57	V

EGPRS 1900


Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.20	-17.38	4.03	10.24	33.6	22.43	33.01	-10.58	V
1880.00	-16.96	4.08	10.24	33.6	22.80	33.01	-10.21	V
1909.80	-16.99	4.14	10.23	33.6	22.70	33.01	-10.31	V

4.2 Radiated Spurious Emission

TEST APPLICABLE

According to the ANSI/TIA-603-E-2016 test method, The Receiver or Spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850.

TEST CONFIGURATION

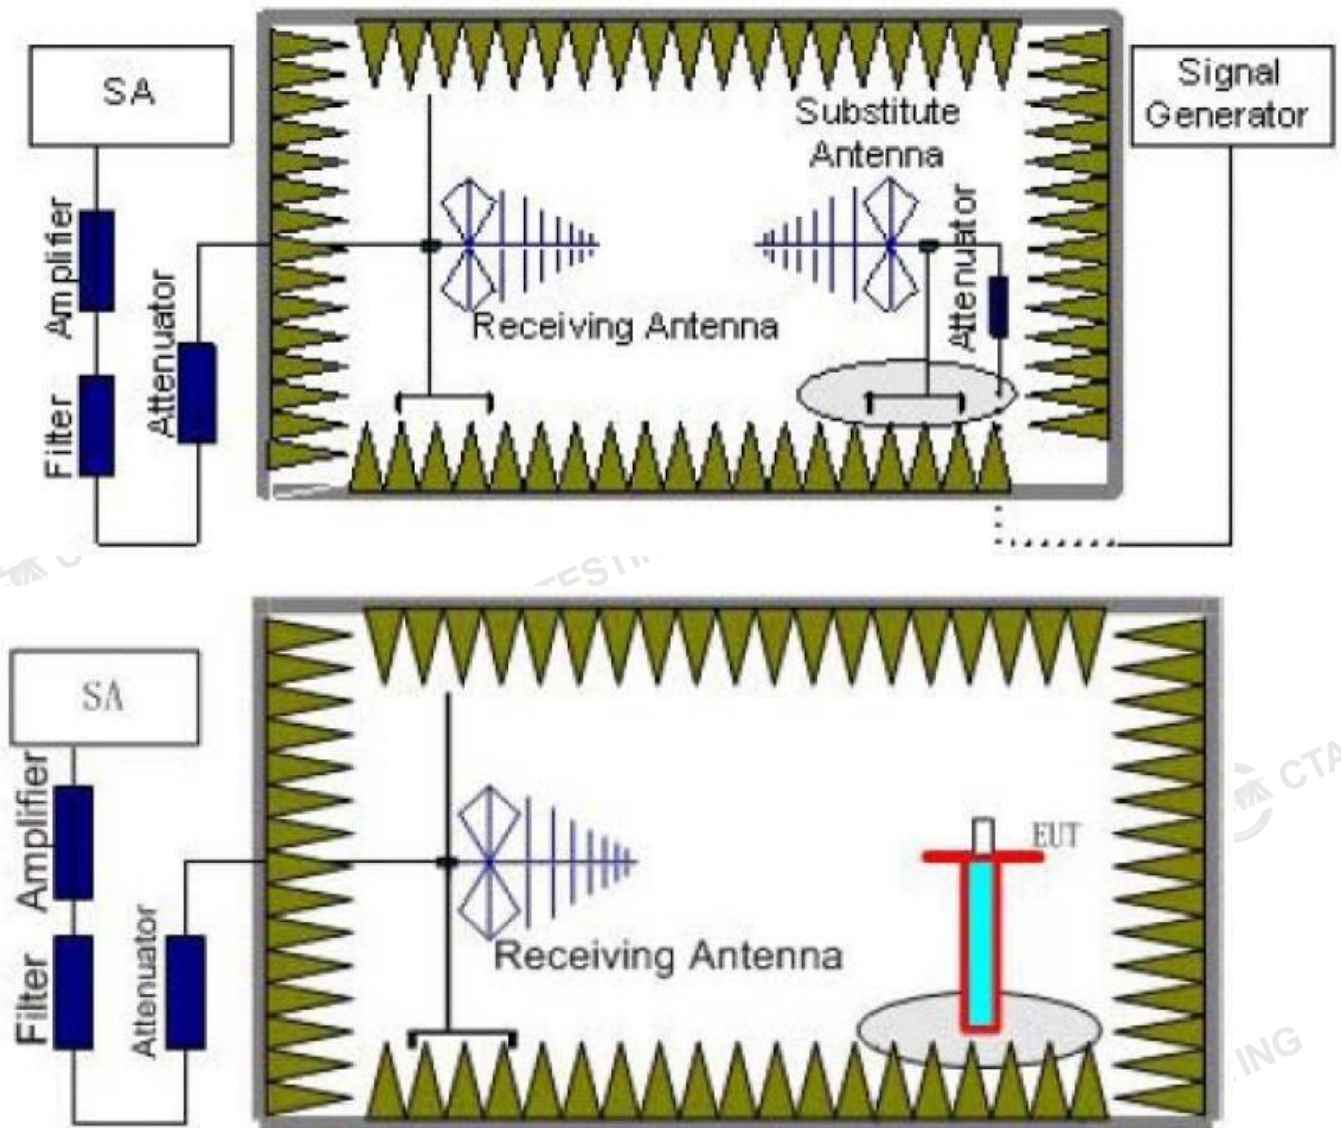

TEST PROCEDURE

1. EUT was placed on a 0.80 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.80m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$$

6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.
8. In order to make sure test results more clearly, we set frequency range and sweep time for difference frequency range as follows table:

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
GSM 850	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
PCS 1900	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

TEST LIMITS

According to 24.238 and 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Frequency	Channel	Frequency Range	Verdict
GSM 850	Low	9KHz-10GHz	PASS
	Middle	9KHz -10GHz	PASS
	High	9KHz -10GHz	PASS
PCS 1900	Low	9KHz -20GHz	PASS
	Middle	9KHz -20GHz	PASS
	High	9KHz -20GHz	PASS

TEST RESULTS

Remark:

1. We were tested all refer 3GPP TS151 010.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
3. We were not recorded other points as values lower than limits.
4. $Margin = Limit - EIRP$

Note :We tested GSM and GPRS Mode,and recorded the worst case at the GSM Mode

GSM850_ Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1648.4	-45.61	3.00	3.00	9.58	-39.03	-13.00	-26.03	H
2472.6	-53.09	3.03	3.00	10.72	-45.40	-13.00	-32.40	H
1648.4	-40.16	3.00	3.00	9.68	-33.48	-13.00	-20.48	V
2472.6	-50.90	3.03	3.00	10.72	-43.21	-13.00	-30.21	V

GSM850_ Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.2	-42.59	3.00	3.00	9.58	-36.01	-13.00	-23.01	H
2509.8	-50.15	3.03	3.00	10.72	-42.46	-13.00	-29.46	H
1673.2	-41.78	3.00	3.00	9.68	-35.10	-13.00	-22.10	V
2509.8	-53.82	3.03	3.00	10.72	-46.13	-13.00	-33.13	V

GSM850_ High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1697.6	-44.69	3.00	3.00	9.58	-38.11	-13.00	-25.11	H
2546.4	-53.67	3.03	3.00	10.72	-45.98	-13.00	-32.98	H
1697.6	-41.01	3.00	3.00	9.68	-34.33	-13.00	-21.33	V
2546.4	-50.02	3.03	3.00	10.72	-42.33	-13.00	-29.33	V

GSM1900_ Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3700.4	-40.86	4.39	3.00	12.34	-32.91	-13.00	-19.91	H
5550.6	-49.63	5.31	3.00	13.52	-41.42	-13.00	-28.42	H
3700.4	-41.74	4.39	3.00	12.34	-33.79	-13.00	-20.79	V
5550.6	-48.65	5.31	3.00	13.52	-40.44	-13.00	-27.44	V

GSM1900_ Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-43.97	4.41	3.00	12.34	-36.04	-13.00	-23.04	H
5640.0	-51.60	5.38	3.00	13.58	-43.40	-13.00	-30.40	H
3760.0	-43.92	4.41	3.00	12.34	-35.99	-13.00	-22.99	V
5640.0	-51.22	5.38	3.00	13.58	-43.02	-13.00	-30.02	V

GSM1900_ High Channel


Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3819.6	-40.22	4.45	3.00	12.45	-32.22	-13.00	-19.22	H
5729.4	-50.90	5.47	3.00	13.66	-42.71	-13.00	-29.71	H
3819.6	-43.84	4.45	3.00	12.45	-35.84	-13.00	-22.84	V
5729.4	-55.94	5.48	3.00	13.66	-47.76	-13.00	-34.76	V

4.3 Occupied Bandwidth and Emission Bandwidth

TEST APPLICABLE

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of PCS1900 band and GSM850 band. The table below lists the measured 99% Bandwidth and -26dBc Bandwidth.

TEST CONFIGURATION

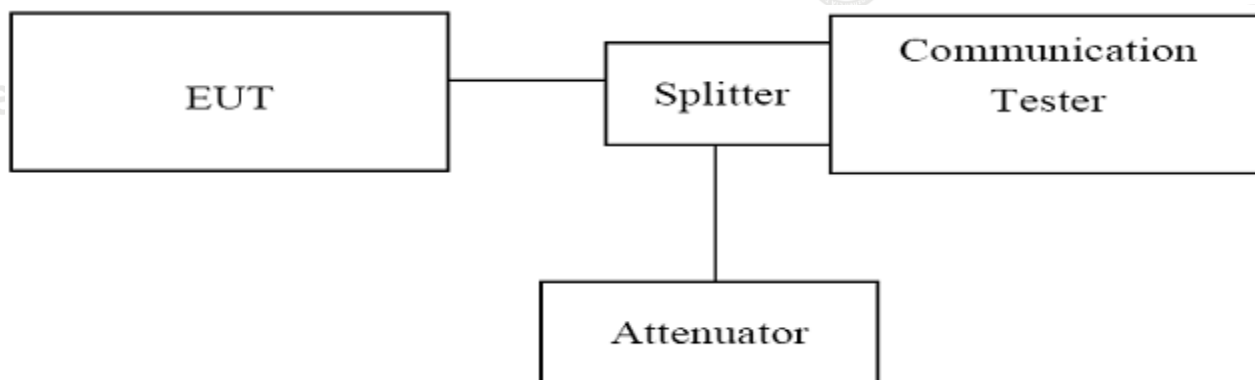



TEST PROCEDURE


1. The EUT was set up for the max output power with pseudo random data modulation;
2. The Occupied bandwidth and Emission Bandwidth were measured with Agilent Spectrum Analyzer N9030A (peak);
3. Set RBW=5.1KHz, VBW=51KHz, Span=1MHz, SWT=500ms;
4. Set SPA Max hold and View, Set 99% Occupied Bandwidth/ Set -26dBc Occupied Bandwidth
5. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1909.80 MHz for PCS1900 band; 824.20MHz, 836.60 MHz and 848.80 MHz for GSM850 band. (Low, middle and high of operational frequency range).




TEST RESULTS


Band	Channel	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	Verdict
GSM850	128	0.24394	0.3081	---	PASS
GSM850	190	0.24576	0.3125	---	PASS
GSM850	251	0.24258	0.3099	---	PASS
GPRS850	128	0.24511	0.3170	---	PASS
GPRS850	190	0.24869	0.3273	---	PASS
GPRS850	251	0.24318	0.3108	---	PASS
EGPRS850	128	0.24590	0.3061	---	PASS
EGPRS850	190	0.24835	0.3114	---	PASS
EGPRS850	251	0.24900	0.3131	---	PASS
GSM1900	512	0.24541	0.3121	---	PASS
GSM1900	661	0.24709	0.3118	---	PASS
GSM1900	810	0.24752	0.3225	---	PASS
GPRS1900	512	0.24319	0.3108	---	PASS
GPRS1900	661	0.24776	0.3093	---	PASS
GPRS1900	810	0.24709	0.3157	---	PASS
EGPRS1900	512	0.25016	0.3170	---	PASS
EGPRS1900	661	0.25420	0.3117	---	PASS
EGPRS1900	810	0.24484	0.3183	---	PASS

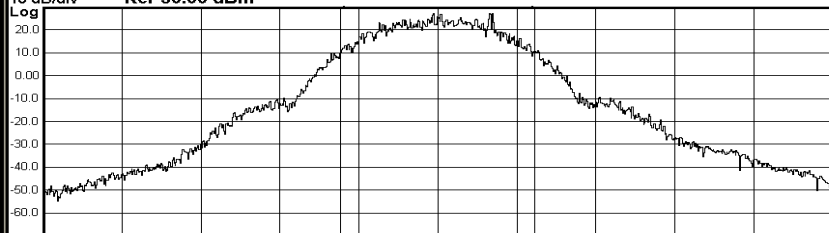
Agilent Spectrum Analyzer - Occupied BW						Frequency	
Center Freq 824.200000 MHz		Center Freq: 824.200000 MHz		Radio Std: None		Center Freq 824.200000 MHz	
#IFGain:Low		#Atten: 40 dB		Avg/Hold: 100/100			
						CF Step 100.000 kHz Man	
Center 824.2 MHz		#VBW 16 kHz		#Sweep 100 ms			
Occupied Bandwidth		Total Power		38.0 dBm		Freq Offset 0 Hz	
243.94 kHz							
Transmit Freq Error		339 Hz		OBW Power			
x dB Bandwidth		308.1 kHz		x dB			
				-26.00 dB			
MSG						STATUS	
GSM850-128-5-PASS							

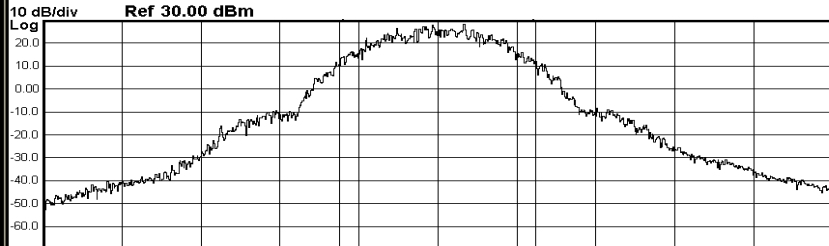
Agilent Spectrum Analyzer - Occupied BW						Frequency	
Center Freq 836.600000 MHz		Center Freq: 836.600000 MHz		Radio Std: None		Center Freq 836.600000 MHz	
#IFGain:Low		#Atten: 40 dB		Avg/Hold: 100/100			
						CF Step 100.000 kHz Man	
Center 836.6 MHz		#VBW 16 kHz		#Sweep 100 ms			
Occupied Bandwidth		Total Power		39.0 dBm		Freq Offset 0 Hz	
245.76 kHz							
Transmit Freq Error		591 Hz		OBW Power			
x dB Bandwidth		312.5 kHz		x dB			
				-26.00 dB			
MSG						STATUS	
GSM850-190-5-PASS							

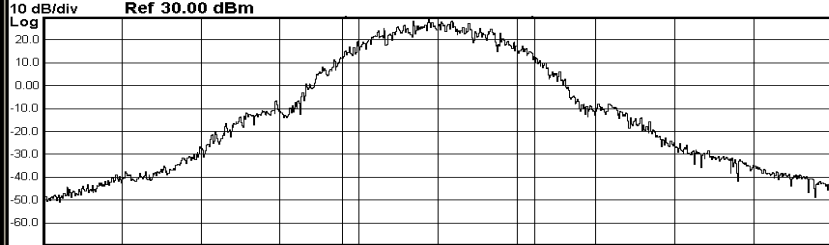
Agilent Spectrum Analyzer - Occupied BW						Frequency	
Center Freq 848.800000 MHz		Center Freq: 848.800000 MHz		Radio Std: None		Center Freq 848.800000 MHz	
#IFGain:Low		#Atten: 40 dB		Avg/Hold: 100/100			
						CF Step 100.000 kHz Man	
Center 848.8 MHz		#VBW 16 kHz		#Sweep 100 ms			
Occupied Bandwidth		Total Power		39.6 dBm		Freq Offset 0 Hz	
242.58 kHz							
Transmit Freq Error		1.014 kHz		OBW Power			
x dB Bandwidth		309.9 kHz		x dB			
				-26.00 dB			
MSG						STATUS	
GSM850-251-5-PASS							

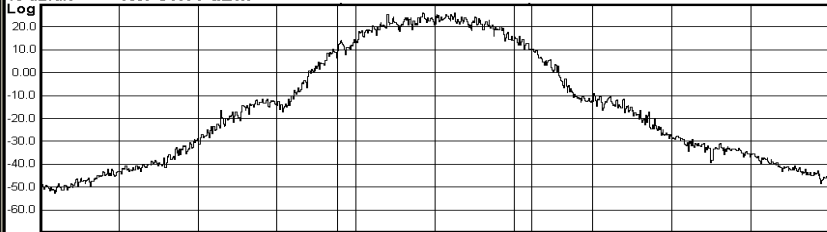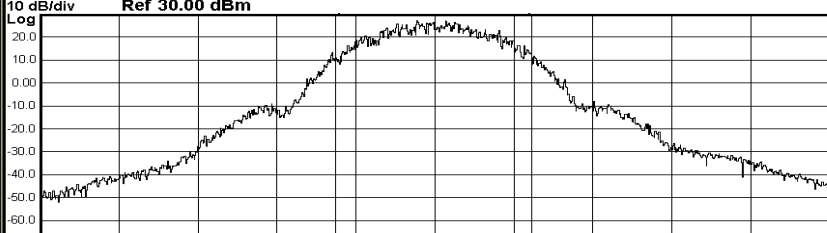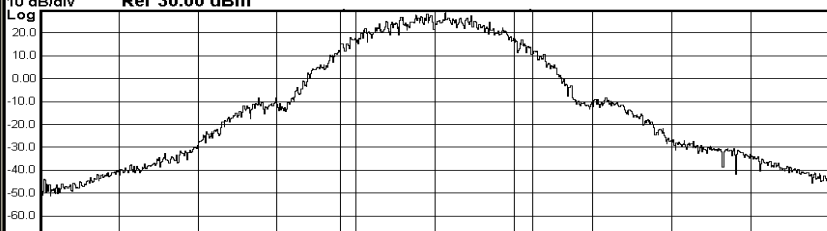Agilent Spectrum Analyzer - Occupied BW RL RF SO Q AC SENSE:PULSE ALIGN:AUTO 03:50:47 PM Sep 03, 2025 Center Freq 824.200000 MHz Center Freq: 824.200000 MHz Trig: Free Run Avg Hold: 100/100 Radio Std: None #IFGain:Low #Atten: 40 dB Radio Device: BTS 10 dB/div Ref 30.00 dBm  Center 824.2 MHz #Res BW 5.1 kHz #VBW 16 kHz Span 1 MHz #Sweep 100 ms Occupied Bandwidth 245.11 kHz Total Power 37.7 dBm Transmit Freq Error 189 Hz OBW Power 99.00 % x dB Bandwidth 317.0 kHz x dB -26.00 dB MSG STATUS				Frequency Center Freq824.200000 MHz CF Step100.000 kHz AutoMan Freq Offset0 Hz
GPRS850-128-5-PASS				
Agilent Spectrum Analyzer - Occupied BW RL RF SO Q AC SENSE:PULSE ALIGN:AUTO 03:51:09 PM Sep 03, 2025 Center Freq 836.600000 MHz Center Freq: 836.600000 MHz Trig: Free Run Avg Hold: 100/100 Radio Std: None #IFGain:Low #Atten: 40 dB Radio Device: BTS 10 dB/div Ref 30.00 dBm  Center 836.6 MHz #Res BW 5.1 kHz #VBW 16 kHz Span 1 MHz #Sweep 100 ms Occupied Bandwidth 248.69 kHz Total Power 38.6 dBm Transmit Freq Error -1.806 kHz OBW Power 99.00 % x dB Bandwidth 327.3 kHz x dB -26.00 dB MSG STATUS				Frequency Center Freq836.600000 MHz CF Step100.000 kHz AutoMan Freq Offset0 Hz
GPRS850-190-5-PASS				
Agilent Spectrum Analyzer - Occupied BW RL RF SO Q AC SENSE:PULSE ALIGN:AUTO 03:51:31 PM Sep 03, 2025 Center Freq 848.800000 MHz Center Freq: 848.800000 MHz Trig: Free Run Avg Hold: 100/100 Radio Std: None #IFGain:Low #Atten: 40 dB Radio Device: BTS 10 dB/div Ref 30.00 dBm  Center 848.8 MHz #Res BW 5.1 kHz #VBW 16 kHz Span 1 MHz #Sweep 100 ms Occupied Bandwidth 243.18 kHz Total Power 39.6 dBm Transmit Freq Error 2.131 kHz OBW Power 99.00 % x dB Bandwidth 310.8 kHz x dB -26.00 dB MSG STATUS				Frequency Center Freq848.800000 MHz CF Step100.000 kHz AutoMan Freq Offset0 Hz
GPRS850-251-5-PASS				

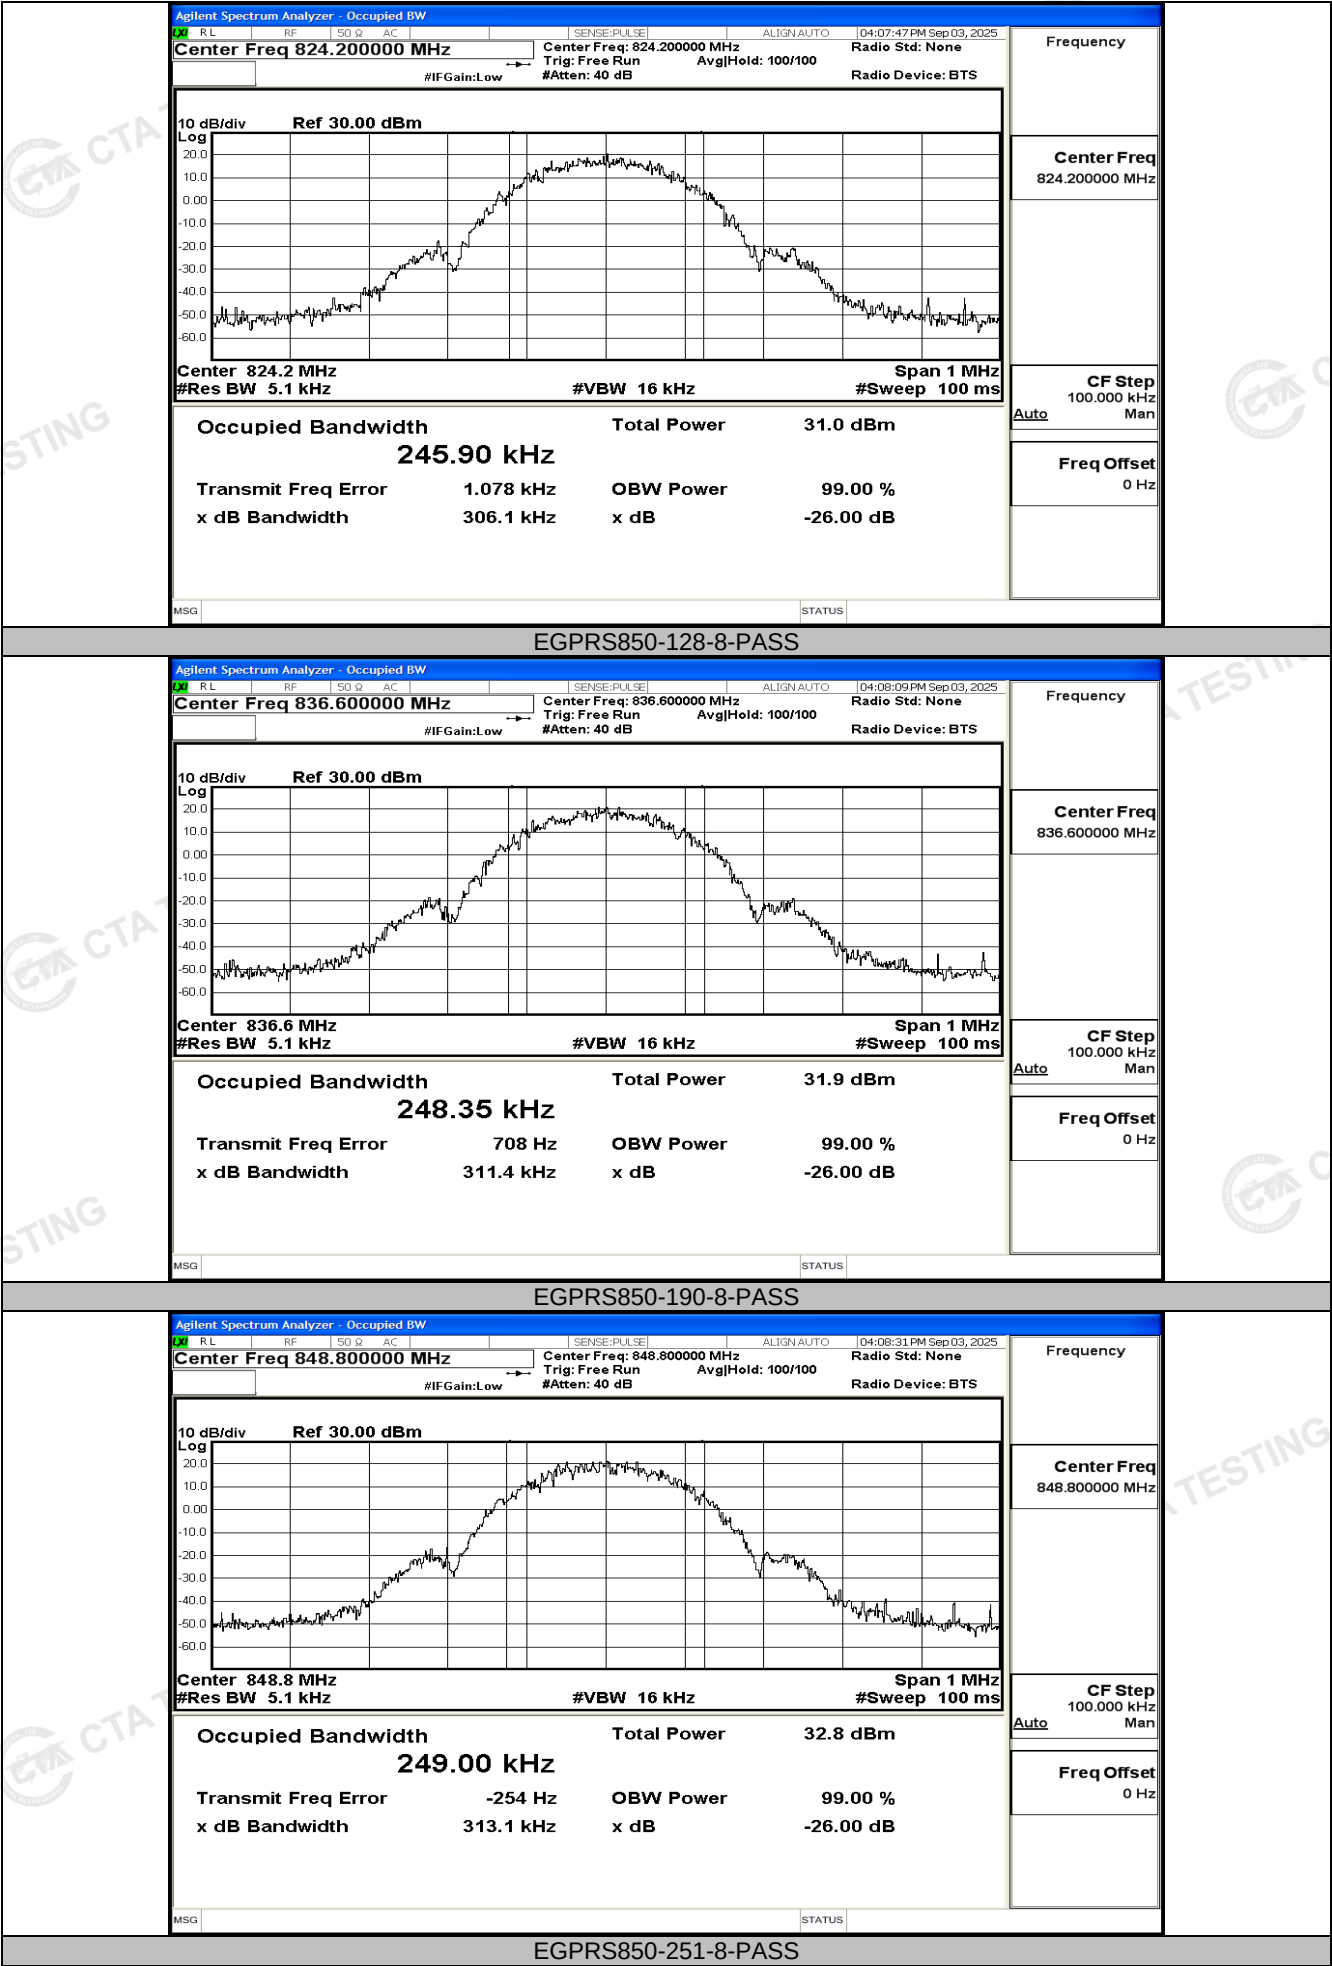

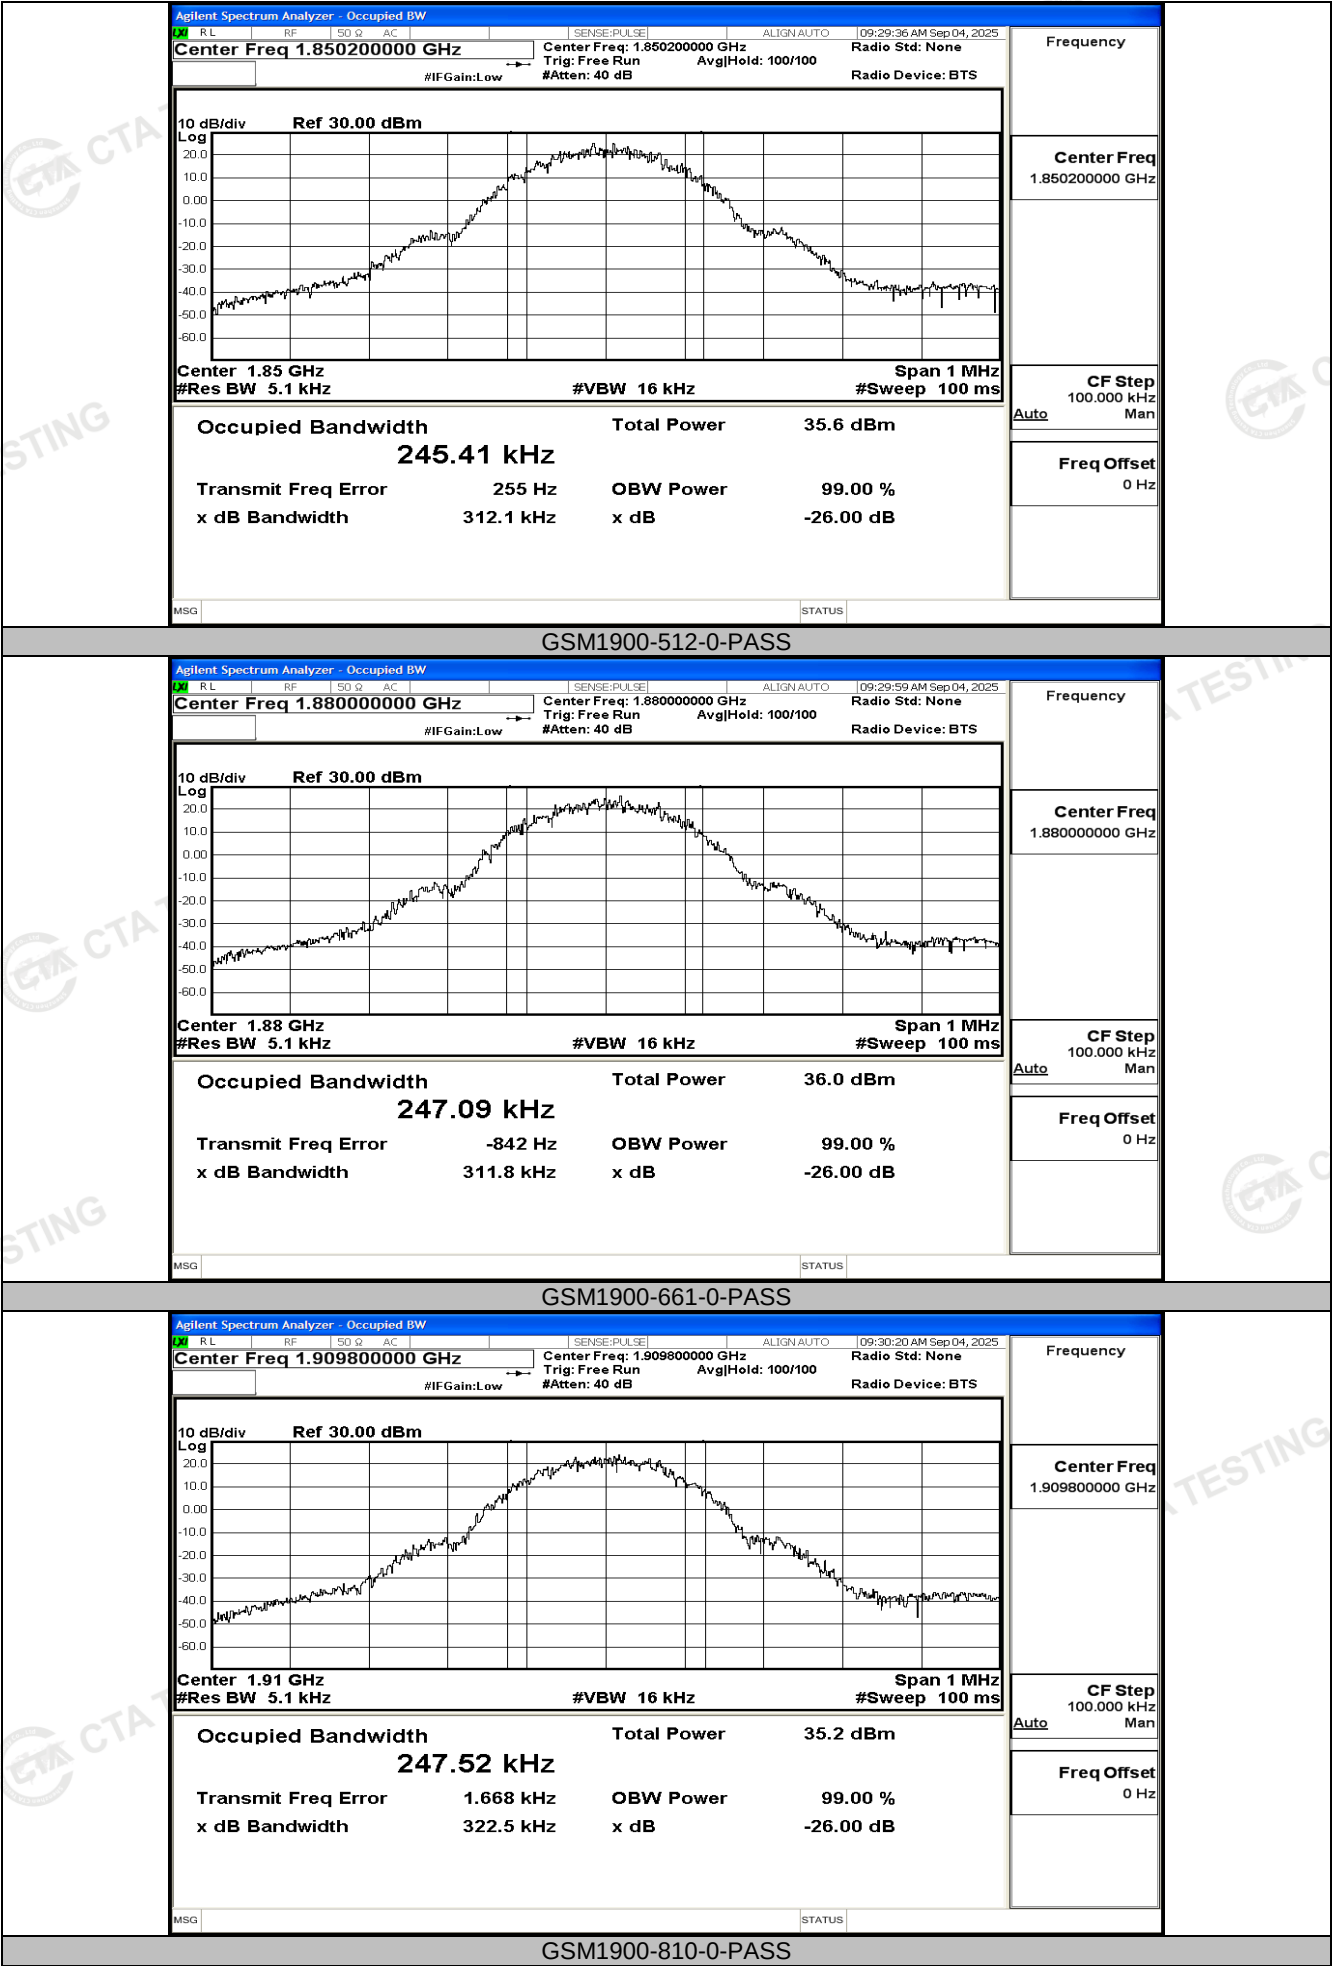

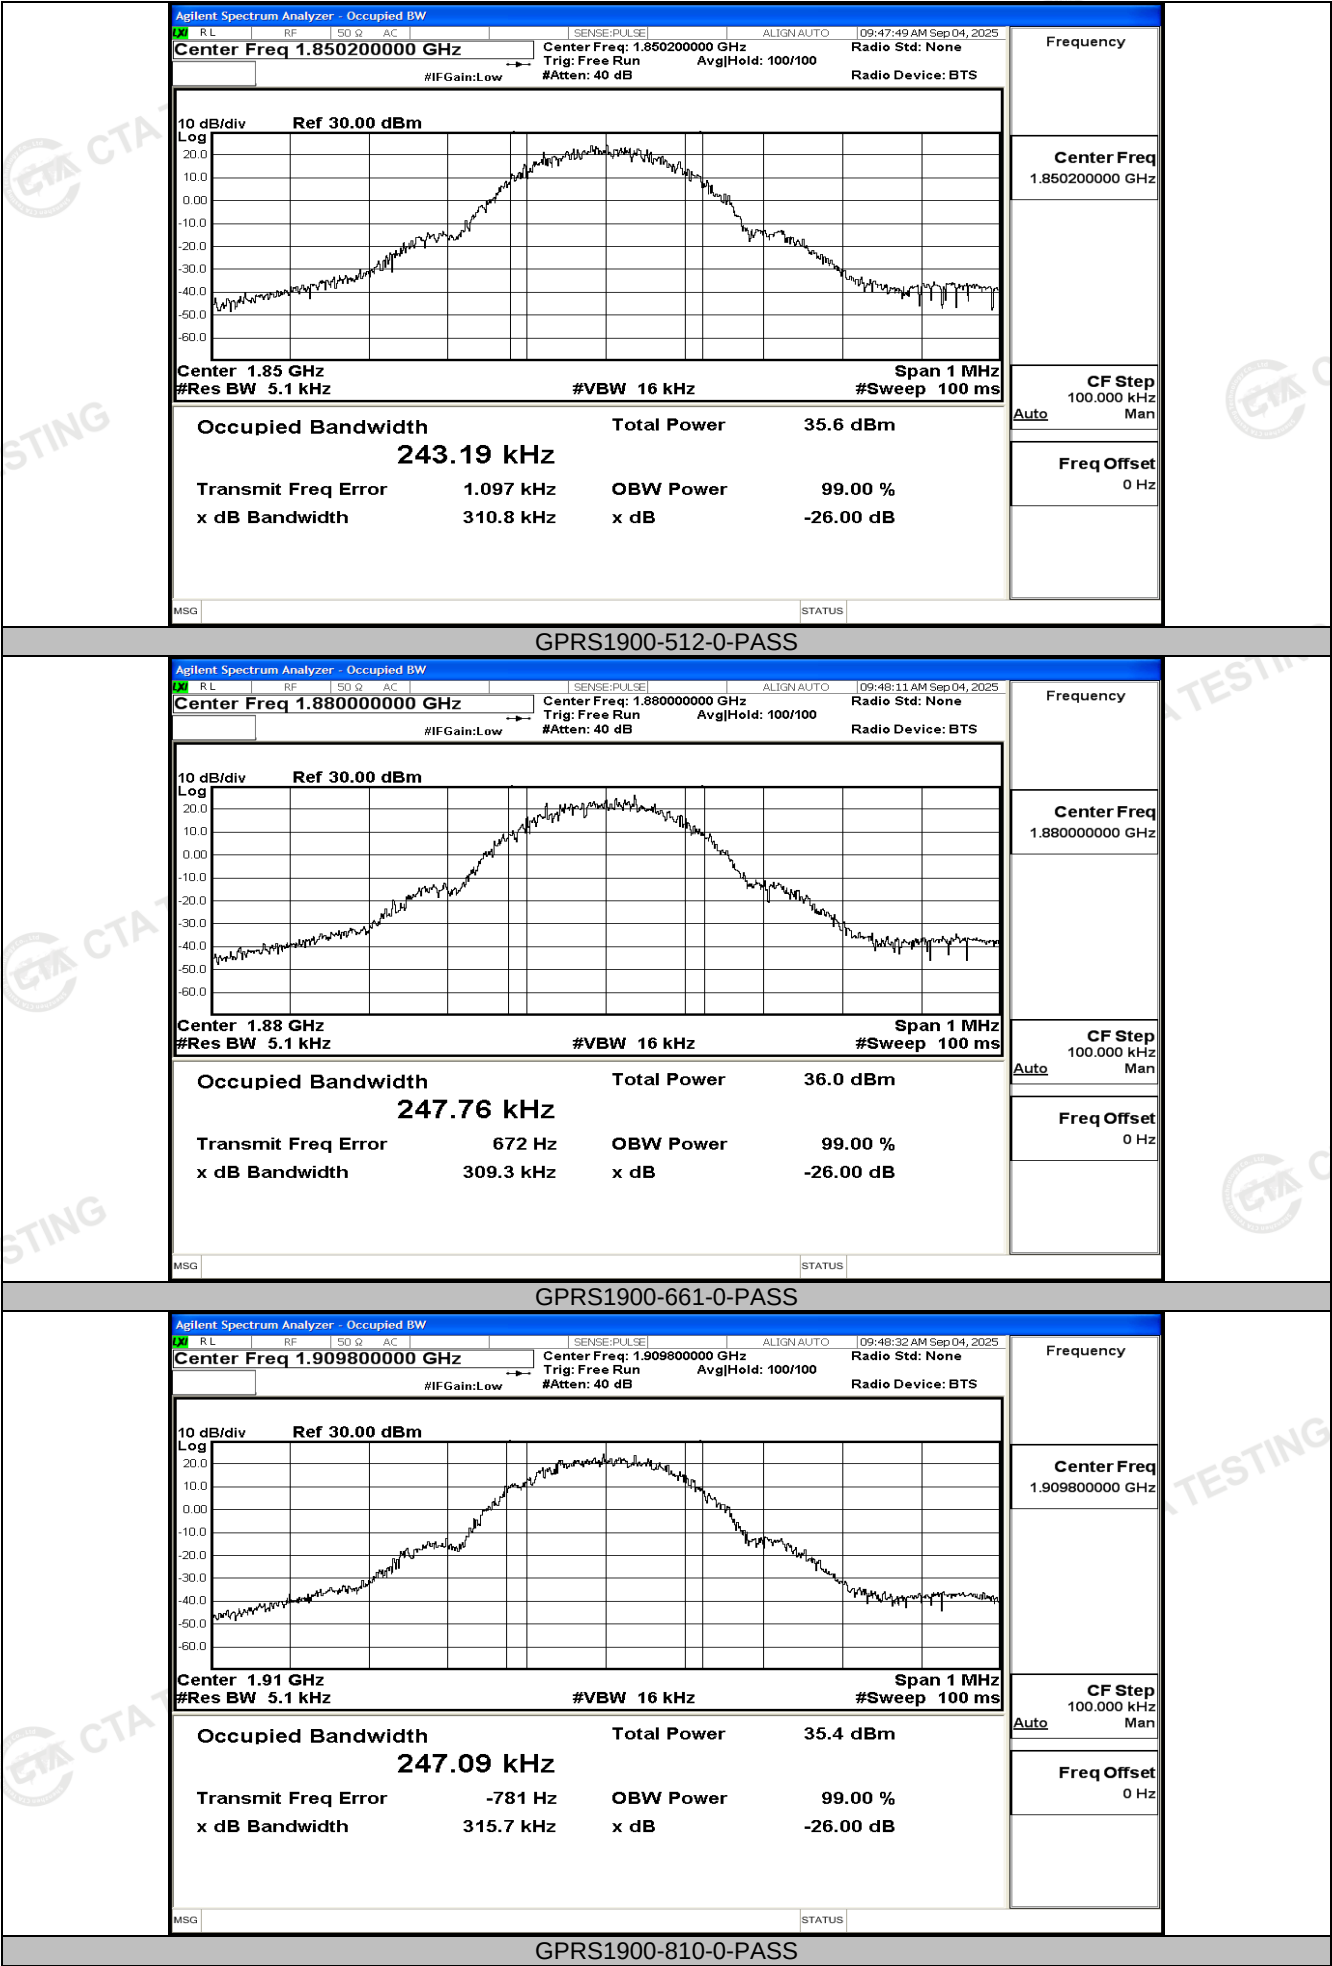

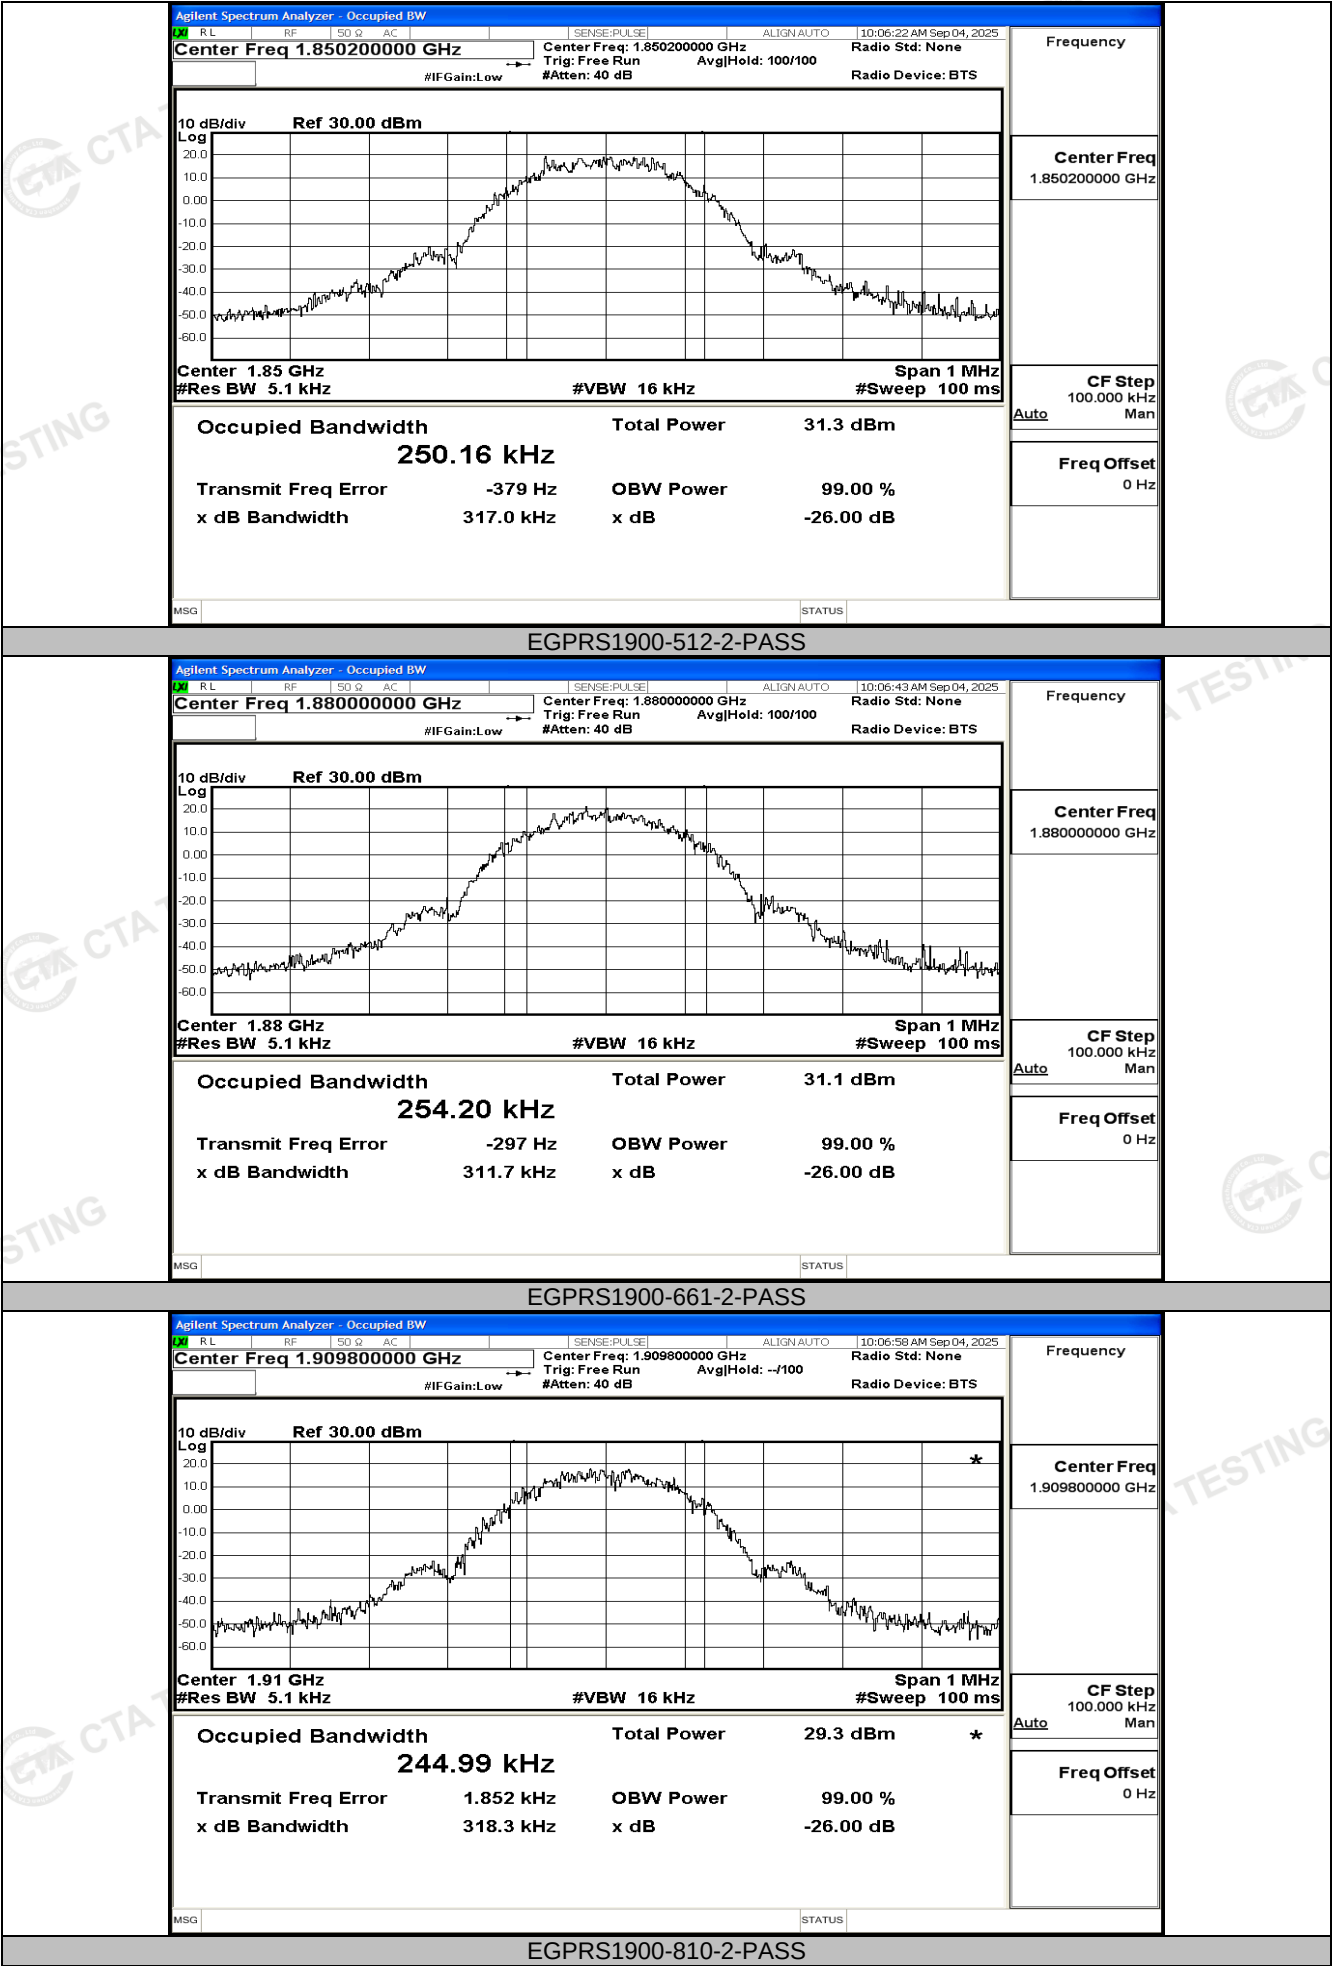

EGPRS1900-661-2-PASS

Agilent Spectrum Analyzer - Occupied BW

RL

RF

SO Q

AC

SENSE:PULSE

ALIGN:AUTO

10:06:58 AM Sep 04, 2025

Center Freq 1.909800000 GHz

Center Freq: 1.909800000 GHz

Trig: Free Run

Avg/Hold: -/100

Radio Std: None


#IFGain:Low

#Atten: 40 dB

Radio Device: BTS

10 dB/div

Ref 30.00 dBm

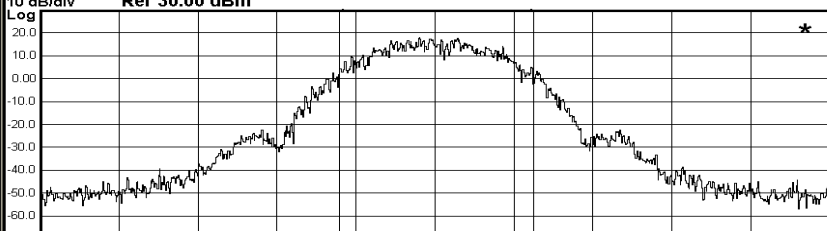

Center 1.91 GHz

#Res BW 5.1 kHz

#VBW 16 kHz

Span 1 MHz

#Sweep 100 ms

Occupied Bandwidth

244.99 kHz

Total Power

29.3 dBm

Transmit Freq Error

1.852 kHz

OBW Power

99.00 %

x dB Bandwidth

318.3 kHz

x dB

-26.00 dB

MSG

STATUS

Frequency

Center Freq

1.909800000 GHz

CF Step

100.000 kHz

Man

Freq Offset

0 Hz


EGPRS1900-810-2-PASS

4.4 Band Edge Compliance

TEST APPLICABLE

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation.

TEST CONFIGURATION

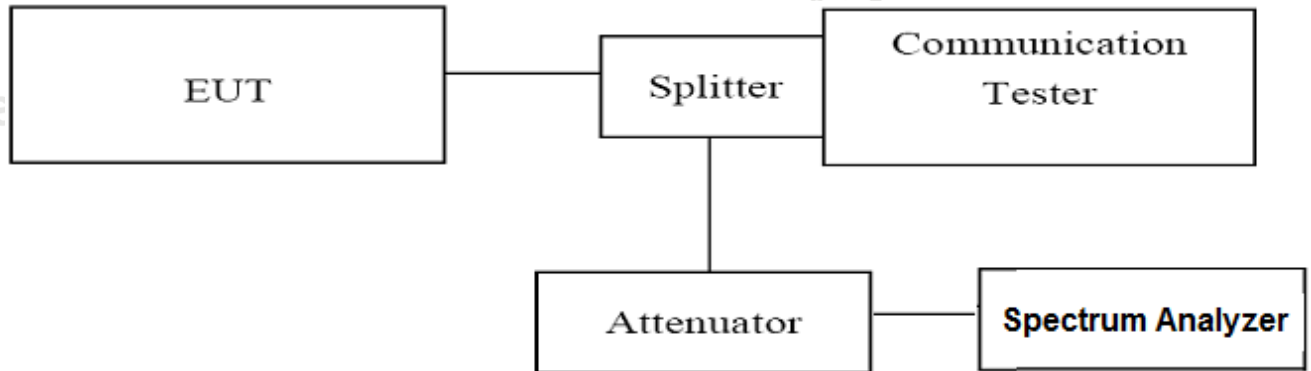


TEST PROCEDURE


1. The EUT was set up for the max output power with pseudo random data modulation;
2. The power was measured with Agilent Spectrum Analyzer N9030A;
3. Set RBW=5.1KHz, VBW=51KHz, Span=3MHz, SWT=300ms, Dector: RMS;
4. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1909.80 MHz for PCS1900 band; 824.20 MHz, 836.60 MHz and 848.80 MHz for GSM850 band. (bottom, middle and top of operational frequency range).

TEST RESULTS


Band	Channel	Freq (MHz)	Result (dBm)	Limit(dBm)	Verdict
GSM850	128	824.00	-25.67	-13	PASS
GSM850	251	849.02	-22.93	-13	PASS
GPRS850	128	823.99	-26.98	-13	PASS
GPRS850	251	849.02	-23.69	-13	PASS
EGPRS850	128	823.98	-36.89	-13	PASS
EGPRS850	251	849.00	-33.80	-13	PASS
GSM1900	512	1850.00	-27.16	-13	PASS
GSM1900	810	1910.02	-27.33	-13	PASS
GPRS1900	512	1849.97	-29.14	-13	PASS
GPRS1900	810	1910.02	-27.49	-13	PASS
EGPRS1900	512	1849.98	-36.81	-13	PASS
EGPRS1900	810	1910.01	-35.60	-13	PASS

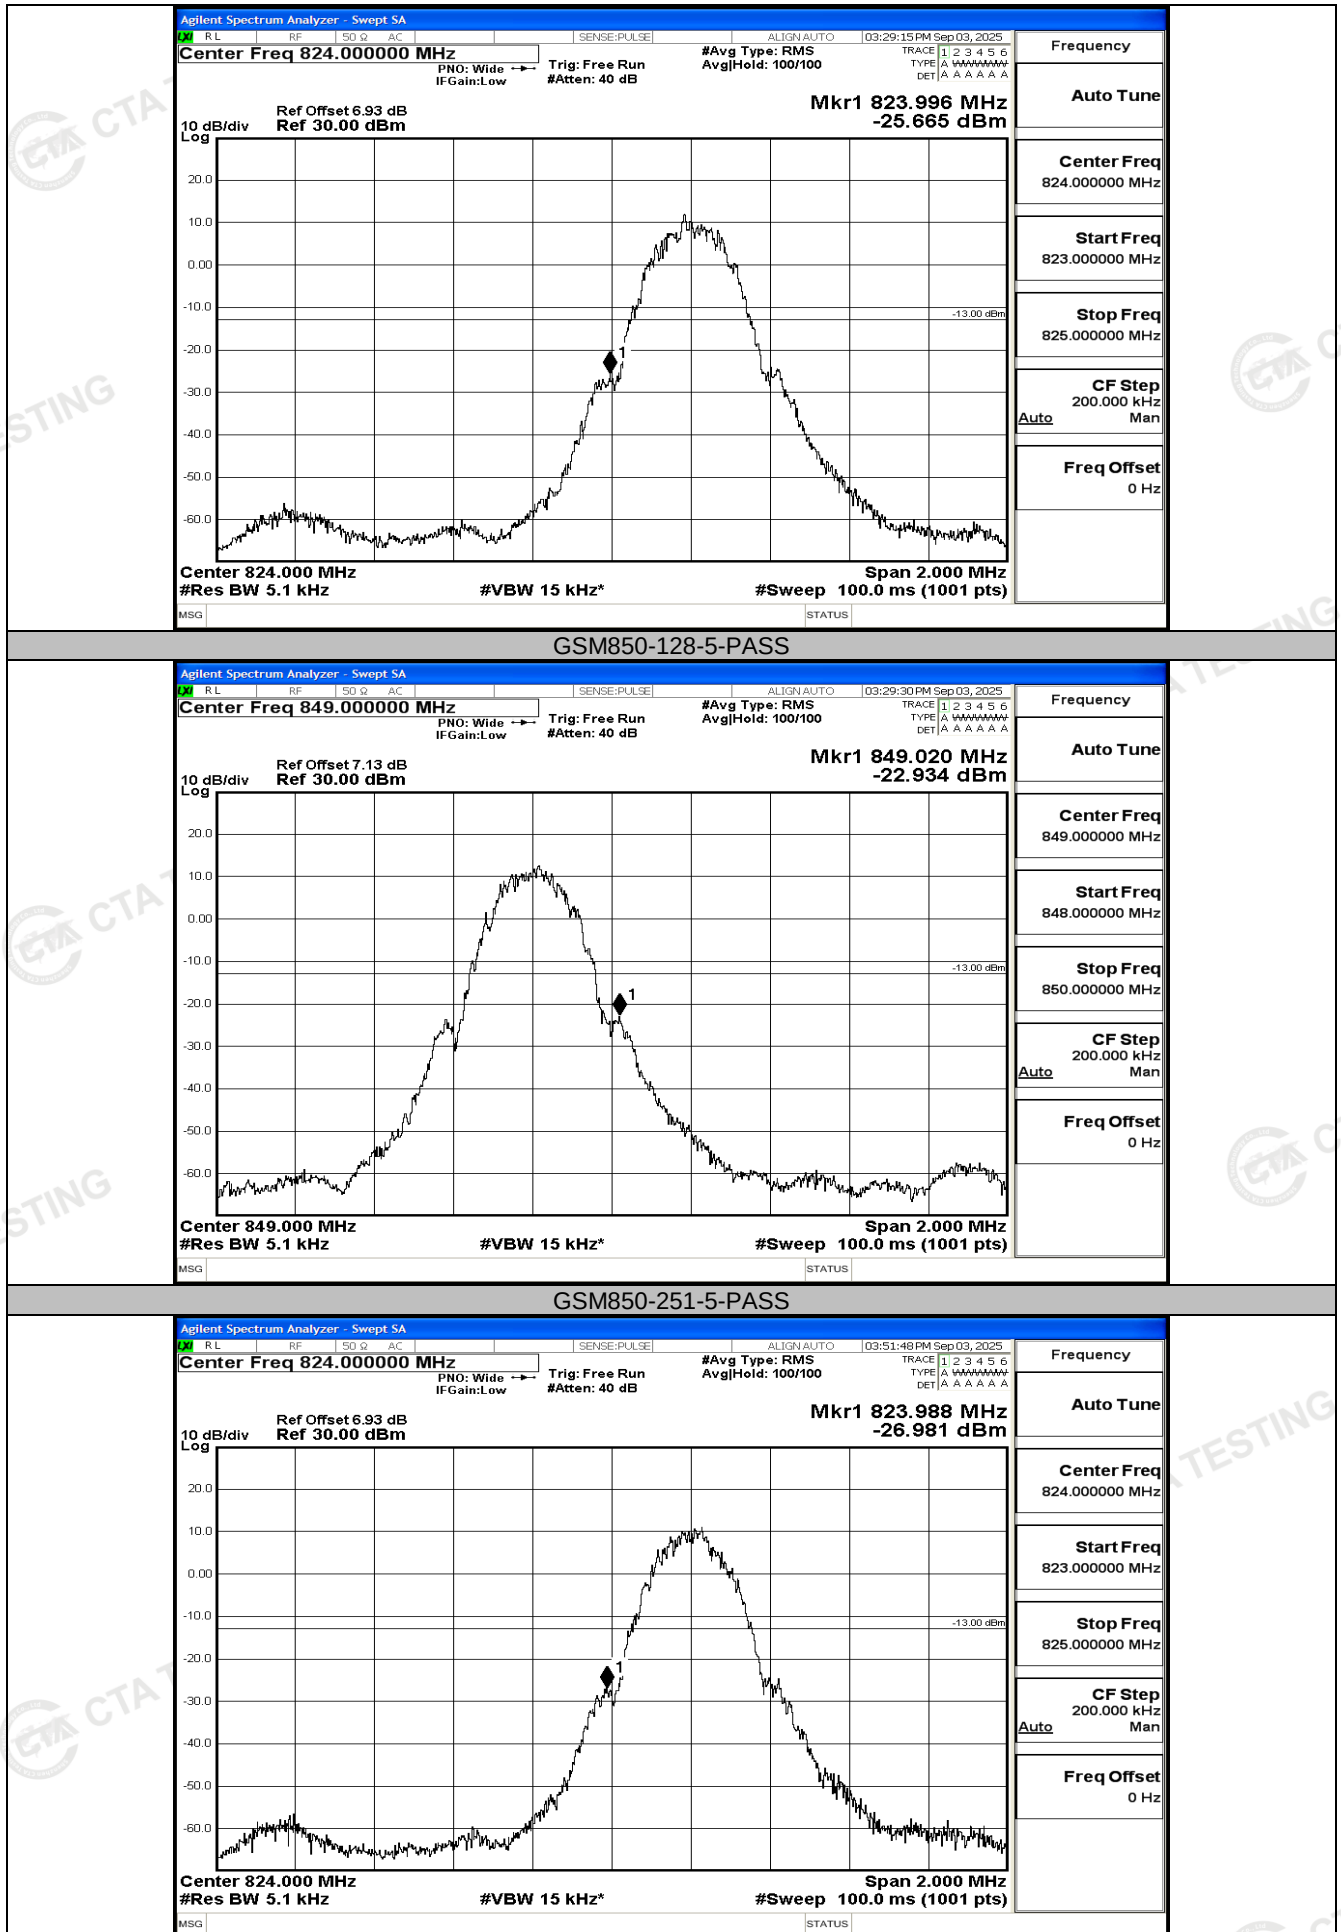


GPRS850-128-5-PASS

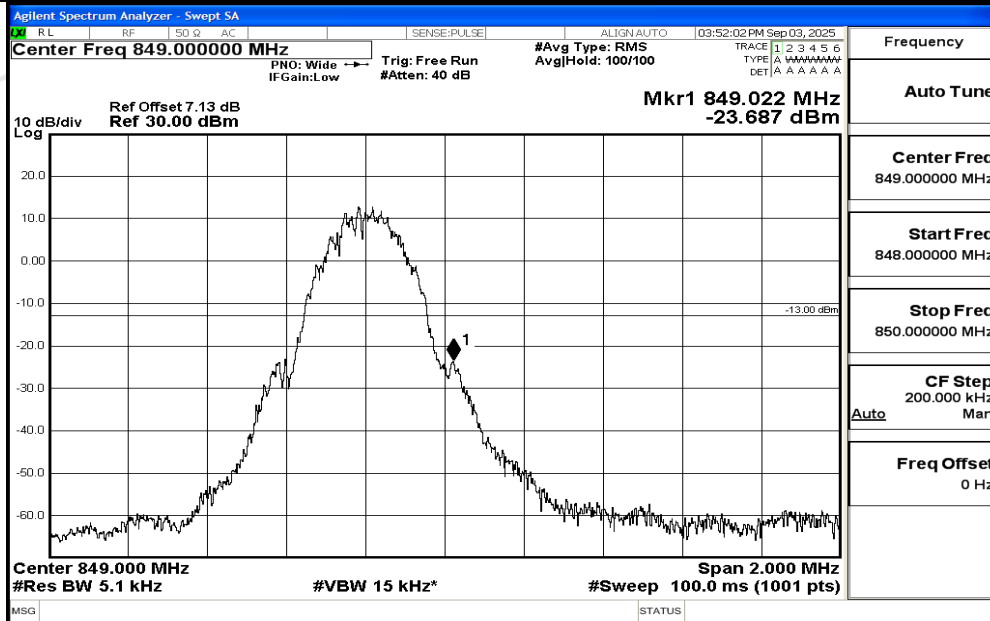


GPRS850-251-5-PASS

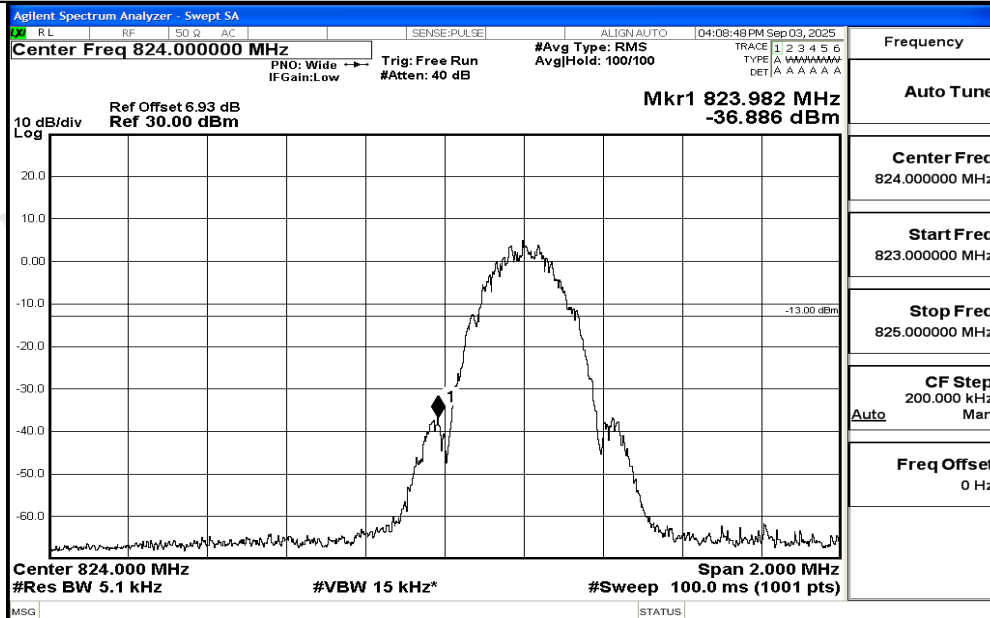


EGPRS850-128-8-PASS

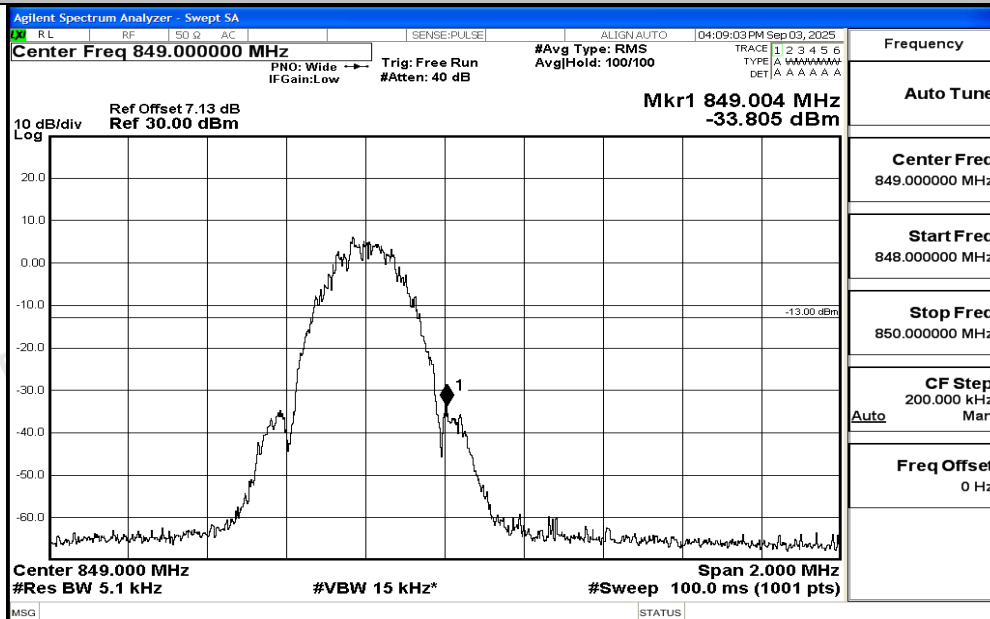

EGPRS850-251-8-PASS

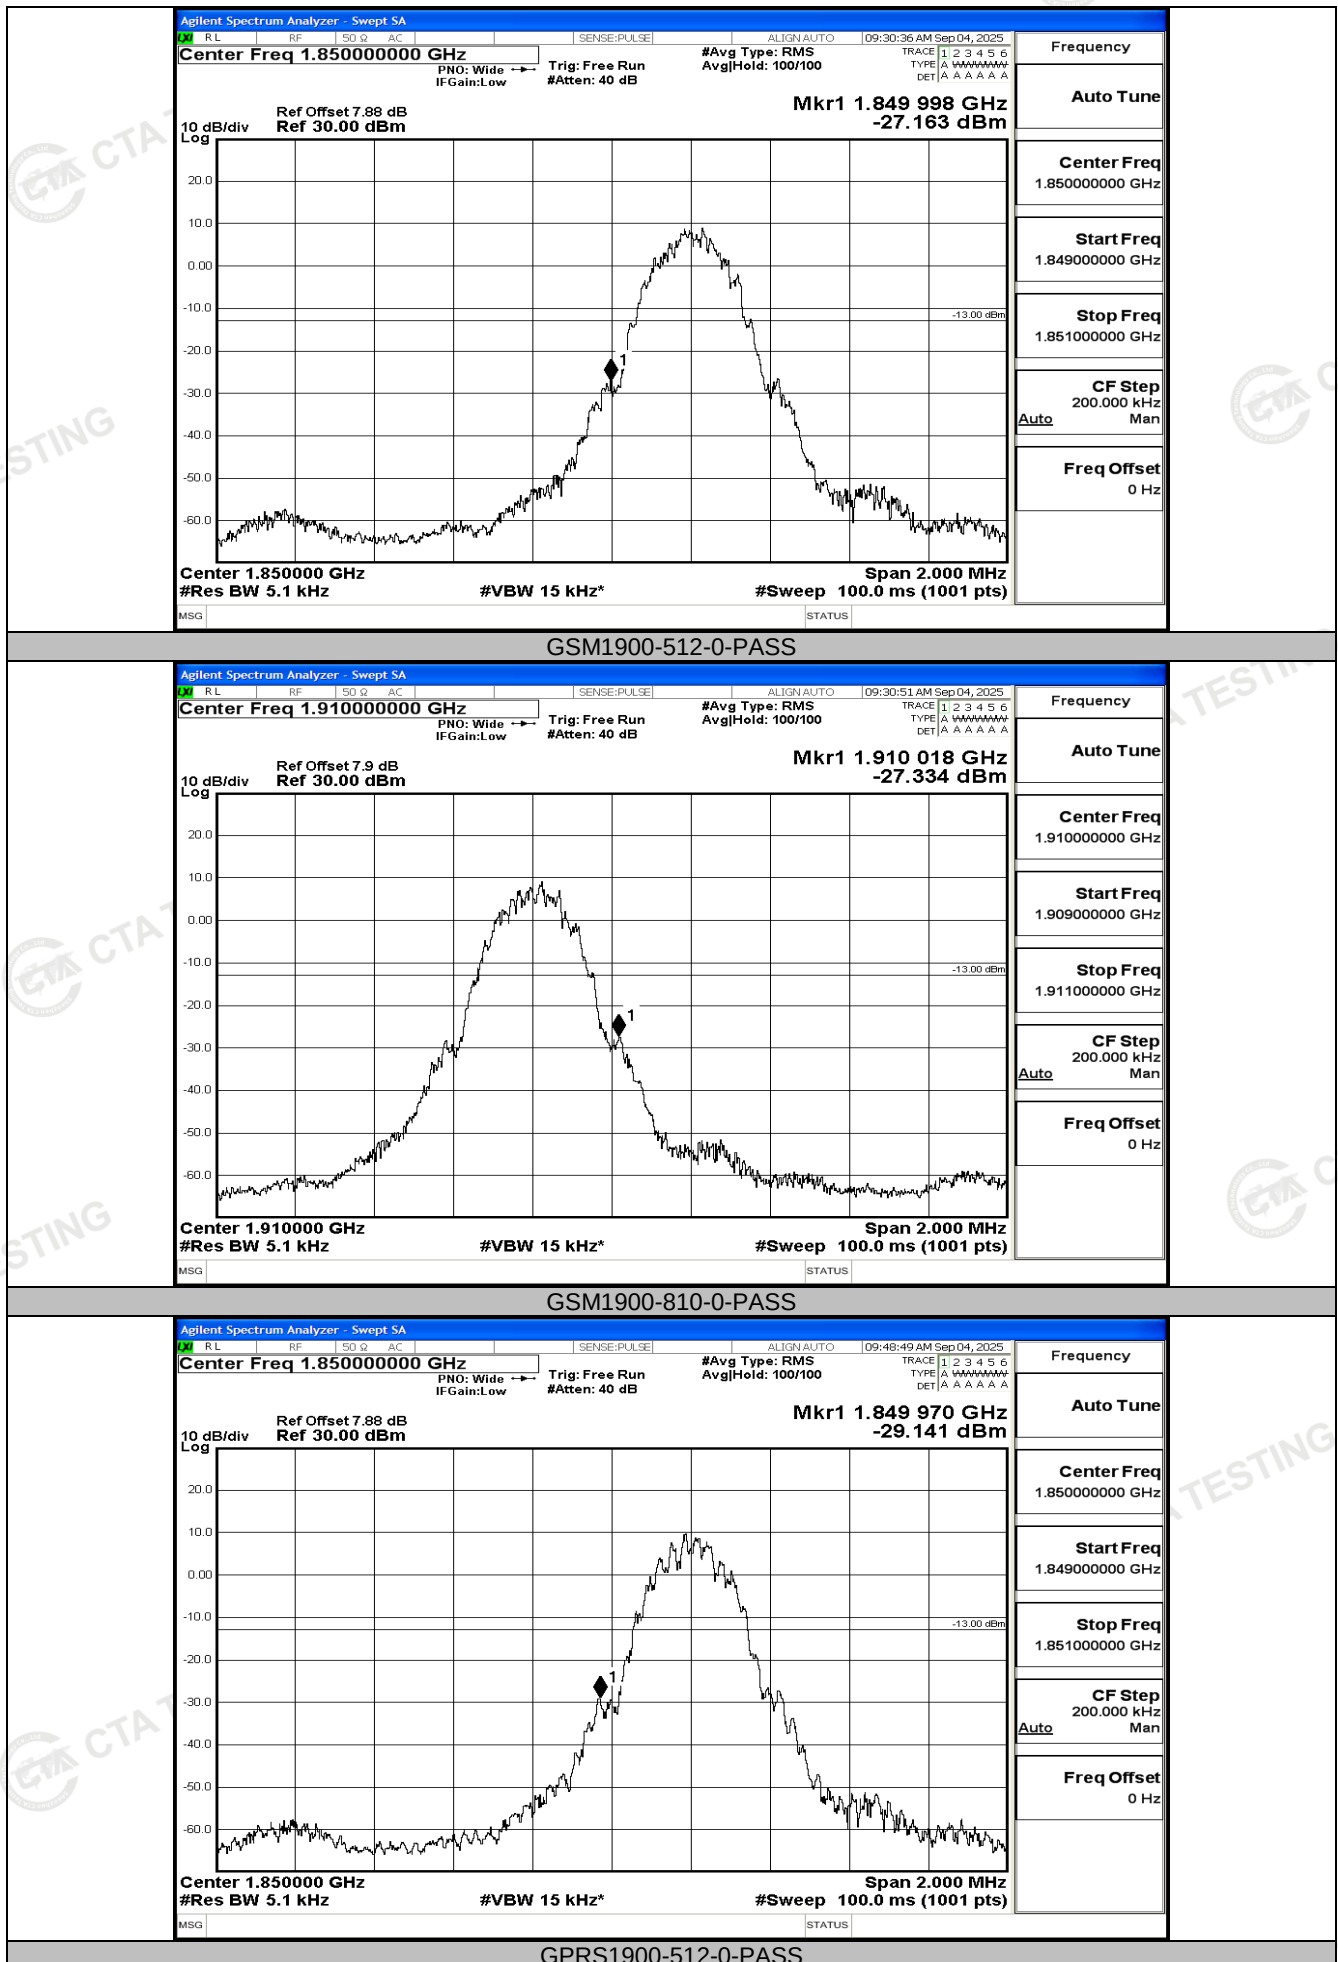

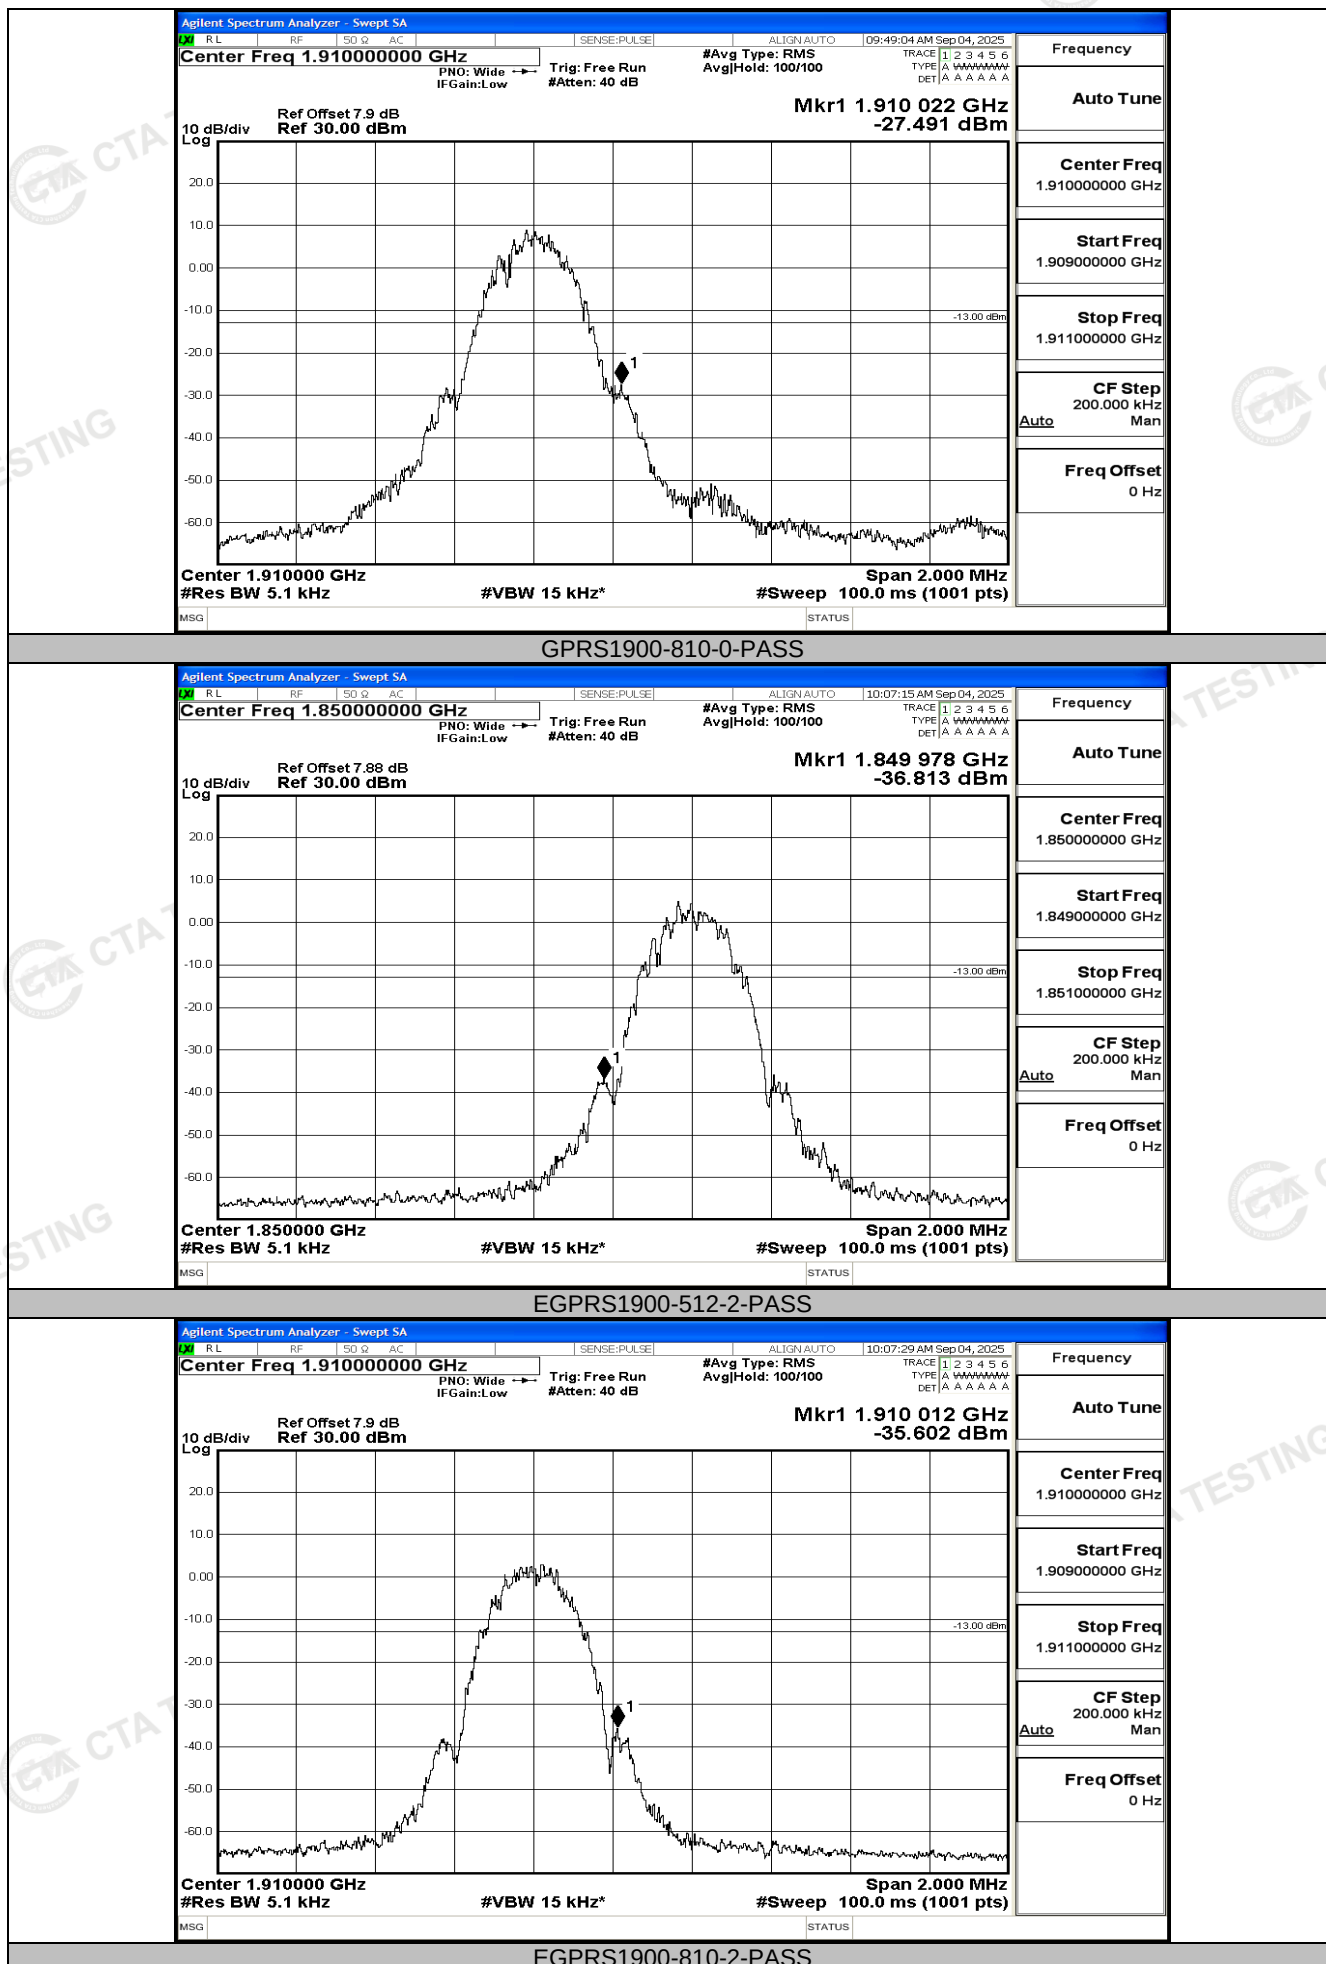


4.5 Spurious Emission on Antenna Port

TEST APPLICABLE

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 9 KHz to 19.1 GHz, data taken from 9 KHz to 25 GHz. For GSM850, data taken from 9 KHz to 9 GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; if the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give an optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:
The trace mode is set to MaxHold to get the highest signal at each frequency;
Wait 25 seconds;
Get the result.
4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

TEST CONFIGURATION

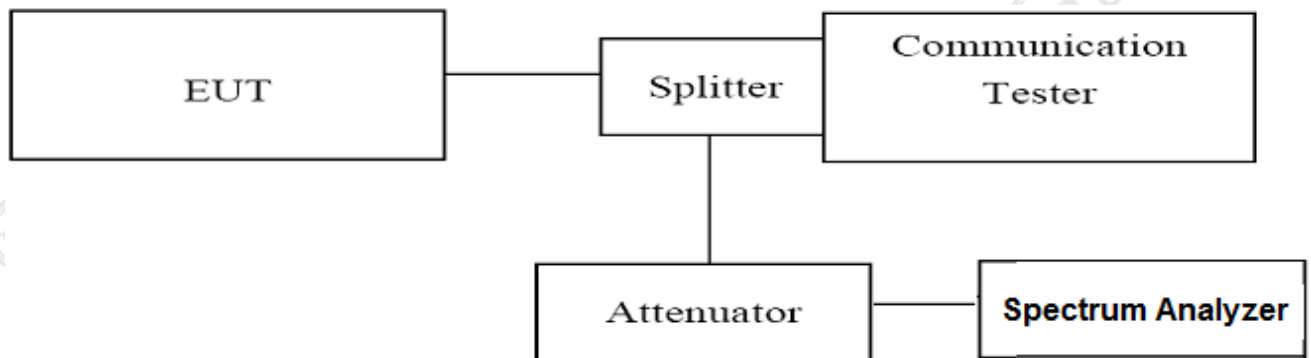

TEST PROCEDURE

1. The EUT was set up for the max output power with pseudo random data modulation;
2. The power was measured with Agilent Spectrum Analyzer N9030A (peak);
3. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1909.80 MHz for PCS1900 band; 824.20 MHz, 836.60 MHz and 848.80 MHz for GSM850 band. (Low, middle and high of operational frequency range).

TEST LIMIT

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

TEST RESULTS

Note: We tested GSM and GPRS mode and recorded the worst case at the GSM mode.

4.5.1 For GSM 850 & GSM1900 Test Results

A. Test Verdict


Band	Channel	Frequency Range(MHz)	Max.Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GSM850	128	0.009~0.15MHz	0.01	-45.78	-33	PASS
GSM850	128	0.15~30MHz	0.15	-33.75	-23	PASS
GSM850	128	30~1000MHz	224.65	-38.24	-13	PASS
GSM850	128	1000~10000MHz	1648.6	-27.22	-13	PASS
GSM850	190	0.009~0.15MHz	0.01	-47.45	-33	PASS
GSM850	190	0.15~30MHz	0.16	-36.13	-23	PASS
GSM850	190	30~1000MHz	402.03	-38.91	-13	PASS
GSM850	190	1000~10000MHz	1673.2	-25.76	-13	PASS
GSM850	251	0.009~0.15MHz	0.01	-45.88	-33	PASS
GSM850	251	0.15~30MHz	0.15	-35.26	-23	PASS
GSM850	251	30~1000MHz	973.45	-38.41	-13	PASS
GSM850	251	1000~10000MHz	1697.5	-25.45	-13	PASS
GPRS850	128	0.009~0.15MHz	0.01	-45.34	-33	PASS
GPRS850	128	0.15~30MHz	0.16	-36.27	-23	PASS
GPRS850	128	30~1000MHz	967.54	-38.44	-13	PASS
GPRS850	128	1000~10000MHz	2652.7	-38.61	-13	PASS
GPRS850	190	0.009~0.15MHz	0.01	-47.58	-33	PASS
GPRS850	190	0.15~30MHz	0.15	-33.4	-23	PASS
GPRS850	190	30~1000MHz	671.36	-37.89	-13	PASS
GPRS850	190	1000~10000MHz	3169.9	-38.54	-13	PASS
GPRS850	251	0.009~0.15MHz	0.01	-45.38	-33	PASS
GPRS850	251	0.15~30MHz	0.15	-36.7	-23	PASS
GPRS850	251	30~1000MHz	993.99	-38.19	-13	PASS
GPRS850	251	1000~10000MHz	1697.8	-25.75	-13	PASS
EGPRS850	128	0.009~0.15MHz	0.01	-43.53	-33	PASS
EGPRS850	128	0.15~30MHz	0.15	-37.2	-23	PASS
EGPRS850	128	30~1000MHz	212.88	-38.42	-13	PASS
EGPRS850	128	1000~10000MHz	2790.4	-38.61	-13	PASS
EGPRS850	190	0.009~0.15MHz	0.01	-44.89	-33	PASS
EGPRS850	190	0.15~30MHz	0.15	-36.22	-23	PASS
EGPRS850	190	30~1000MHz	702.66	-38.56	-13	PASS
EGPRS850	190	1000~10000MHz	1673.2	-34.93	-13	PASS
EGPRS850	251	0.009~0.15MHz	0.01	-45.52	-33	PASS
EGPRS850	251	0.15~30MHz	0.16	-35.86	-23	PASS
EGPRS850	251	30~1000MHz	407.49	-39.1	-13	PASS
EGPRS850	251	1000~10000MHz	1697.5	-33.01	-13	PASS
GSM1900	512	0.009~0.15MHz	0.01	-47.59	-43	PASS
GSM1900	512	0.15~30MHz	0.15	-34.03	-33	PASS
GSM1900	512	30~1000MHz	968.83	-53.9	-13	PASS
GSM1900	512	1000~3000MHz	2561.4	-23.84	-13	PASS
GSM1900	512	3000~18000MHz	17966	-31.15	-13	PASS
GSM1900	661	0.009~0.15MHz	0.01	-48.07	-43	PASS
GSM1900	661	0.15~30MHz	0.17	-36.76	-33	PASS
GSM1900	661	30~1000MHz	826.76	-53.99	-13	PASS
GSM1900	661	3000~18000MHz	16640.5	-31.13	-13	PASS
GSM1900	810	0.009~0.15MHz	0.01	-46.42	-43	PASS
GSM1900	810	0.15~30MHz	0.15	-35.98	-33	PASS
GSM1900	810	30~1000MHz	895.05	-52.83	-13	PASS
GPRS1900	512	0.009~0.15MHz	0.01	-48.21	-43	PASS
GPRS1900	512	0.15~30MHz	0.16	-34.59	-33	PASS
GPRS1900	512	30~1000MHz	34.56	-44.96	-13	PASS
GPRS1900	512	1000~3000MHz	2590.53	-23.76	-13	PASS
GPRS1900	512	3000~18000MHz	17130	-31.22	-13	PASS
GPRS1900	661	0.009~0.15MHz	0.01	-46.74	-43	PASS
GPRS1900	661	0.15~30MHz	0.15	-35.21	-33	PASS
GSM1900	810	1000~3000MHz	2614.67	-24.1	-13	PASS
GSM1900	810	3000~18000MHz	16979.5	-30.7	-13	PASS
GPRS1900	661	30~1000MHz	36.5	-42.95	-13	PASS
GPRS1900	661	1000~3000MHz	2978.13	-23.98	-13	PASS
GPRS1900	661	3000~18000MHz	16941	-31.21	-13	PASS
GPRS1900	810	0.009~0.15MHz	0.01	-47.88	-43	PASS
GPRS1900	810	0.15~30MHz	0.16	-36.09	-33	PASS

GPRS1900	810	30~1000MHz	36.24	-42.35	-13	PASS
GPRS1900	810	1000~3000MHz	2594.6	-23.76	-13	PASS
GPRS1900	810	3000~18000MHz	16946	-30.9	-13	PASS
EGPRS1900	512	0.009~0.15MHz	0.01	-48.74	-43	PASS
EGPRS1900	512	0.15~30MHz	0.16	-35.32	-33	PASS
EGPRS1900	512	30~1000MHz	895.4	-53.21	-13	PASS
EGPRS1900	512	1000~3000MHz	2541	-23.99	-13	PASS
EGPRS1900	512	3000~18000MHz	17528.5	-31.27	-13	PASS
EGPRS1900	661	0.009~0.15MHz	0.01	-47.76	-43	PASS
EGPRS1900	661	0.15~30MHz	0.17	-35.38	-33	PASS
EGPRS1900	661	30~1000MHz	779.94	-53.7	-13	PASS
EGPRS1900	661	1000~3000MHz	2589.53	-23.83	-13	PASS
EGPRS1900	661	3000~18000MHz	17975	-30.5	-13	PASS
EGPRS1900	810	0.009~0.15MHz	0.01	-47.63	-43	PASS
EGPRS1900	810	0.15~30MHz	0.15	-34.87	-33	PASS
EGPRS1900	810	30~1000MHz	828.89	-54.18	-13	PASS
EGPRS1900	810	1000~3000MHz	2641.93	-23.13	-13	PASS
EGPRS1900	810	3000~18000MHz	17004	-31.05	-13	PASS
GSM1900	661	1000~3000MHz	2592.13	-23.09	-13	PASS

Note:

1. In general, the worse case attenuation requirement shown above was applied.
2. "----" means that the emission level is too low to be measured or at least 20 dB down than the limit.

B. Test Plots

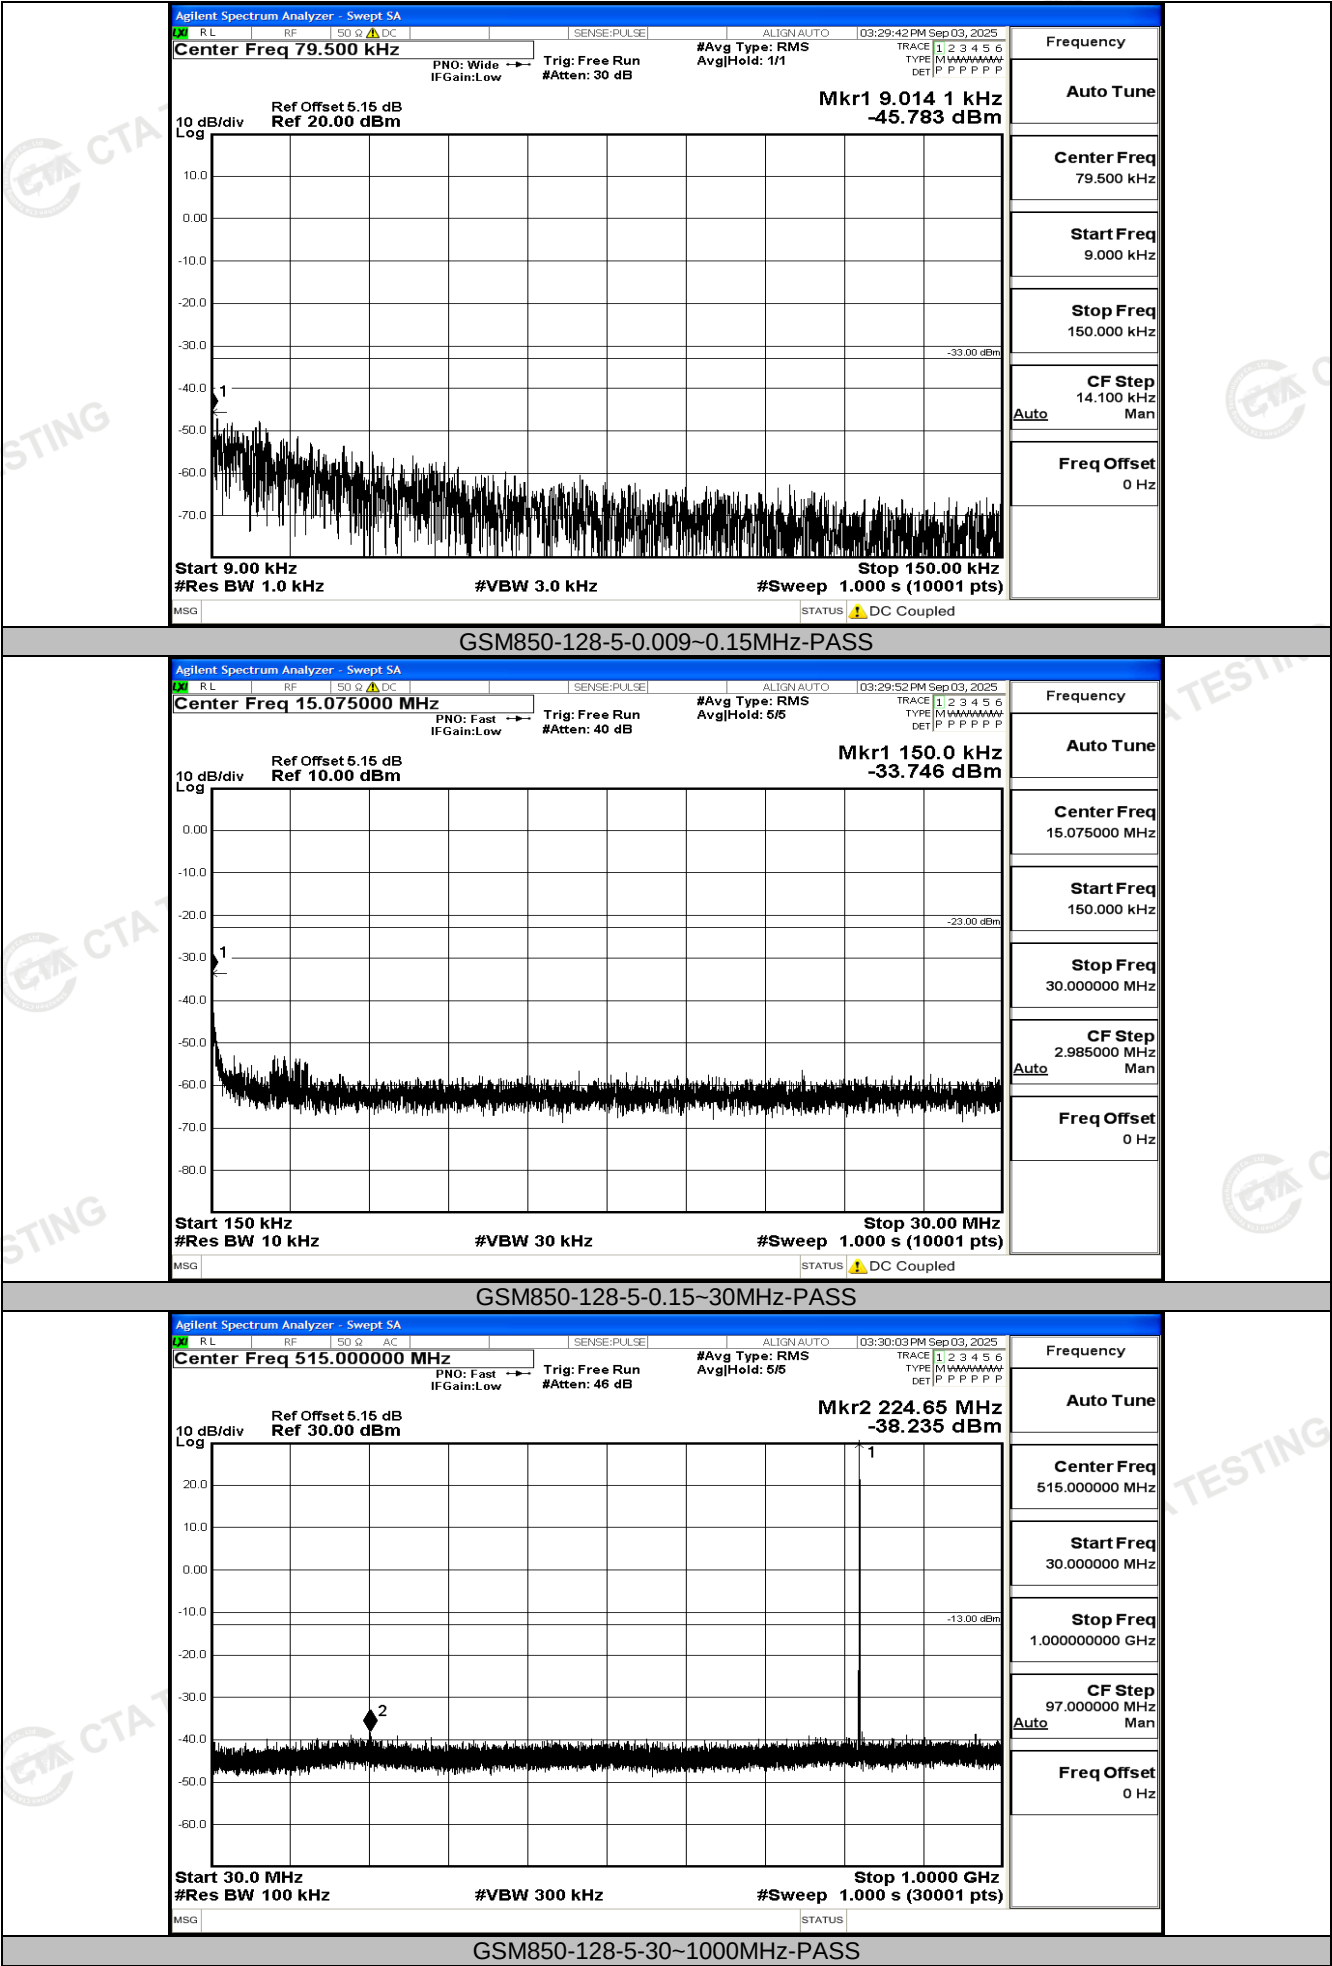

GSM850-128-5-0.009~0.15MHz-PASS

Agilent Spectrum Analyzer - Swept SA

RL

RF

50 Ω

DC

SENSE:PULSE

ALIGN:AUTO

03:29:52 PM Sep 03, 2025

Center Freq 15.075000 MHz

PNO: Fast

IFGain:Low

Trig: Free Run

#Atten: 40 dB

#Avg Type: RMS

AvgHold: 5/5

TRACE 1 2 3 4 5 6

TYPE M W W W W W W W

DET P P P P P P P

10 dB/div

Ref Offset 5.15 dB

Ref 10.00 dBm

Mkr1 150.0 kHz

-33.746 dBm

Start 150 kHz

#Res BW 10 kHz

#VBW 30 kHz

#Sweep 1.000 s (10001 pts)

MSG

STATUS

DC Coupled

Frequency

Auto Tune

Center Freq15.075000 MHz

Start Freq150.000 kHz

Stop Freq30.000000 MHz

CF Step2.985000 MHz

Auto

Man

Freq Offset0 Hz

GSM850-128-5-0.15~30MHz-PASS

Agilent Spectrum Analyzer - Swept SA

RL

RF

50 Ω

AC

SENSE:PULSE

ALIGN:AUTO

03:30:03 PM Sep 03, 2025

Center Freq 515.000000 MHz

PNO: Fast

IFGain:Low

Trig: Free Run

#Atten: 46 dB

#Avg Type: RMS

AvgHold: 5/5

TRACE 1 2 3 4 5 6

TYPE M W W W W W W W

DET P P P P P P P

10 dB/div

Ref Offset 5.15 dB

Ref 30.00 dBm

Mkr2 224.65 MHz

-38.235 dBm

Start 30.0 MHz

#Res BW 100 kHz

#VBW 300 kHz

#Sweep 1.000 s (30001 pts)

MSG

STATUS

Frequency

Auto Tune

Center Freq515.000000 MHz

Start Freq30.000000 MHz

Stop Freq1.000000000 GHz


CF Step97.000000 MHz


Auto


Man


Freq Offset0 Hz


GSM850-128-5-30~1000MHz-PASS

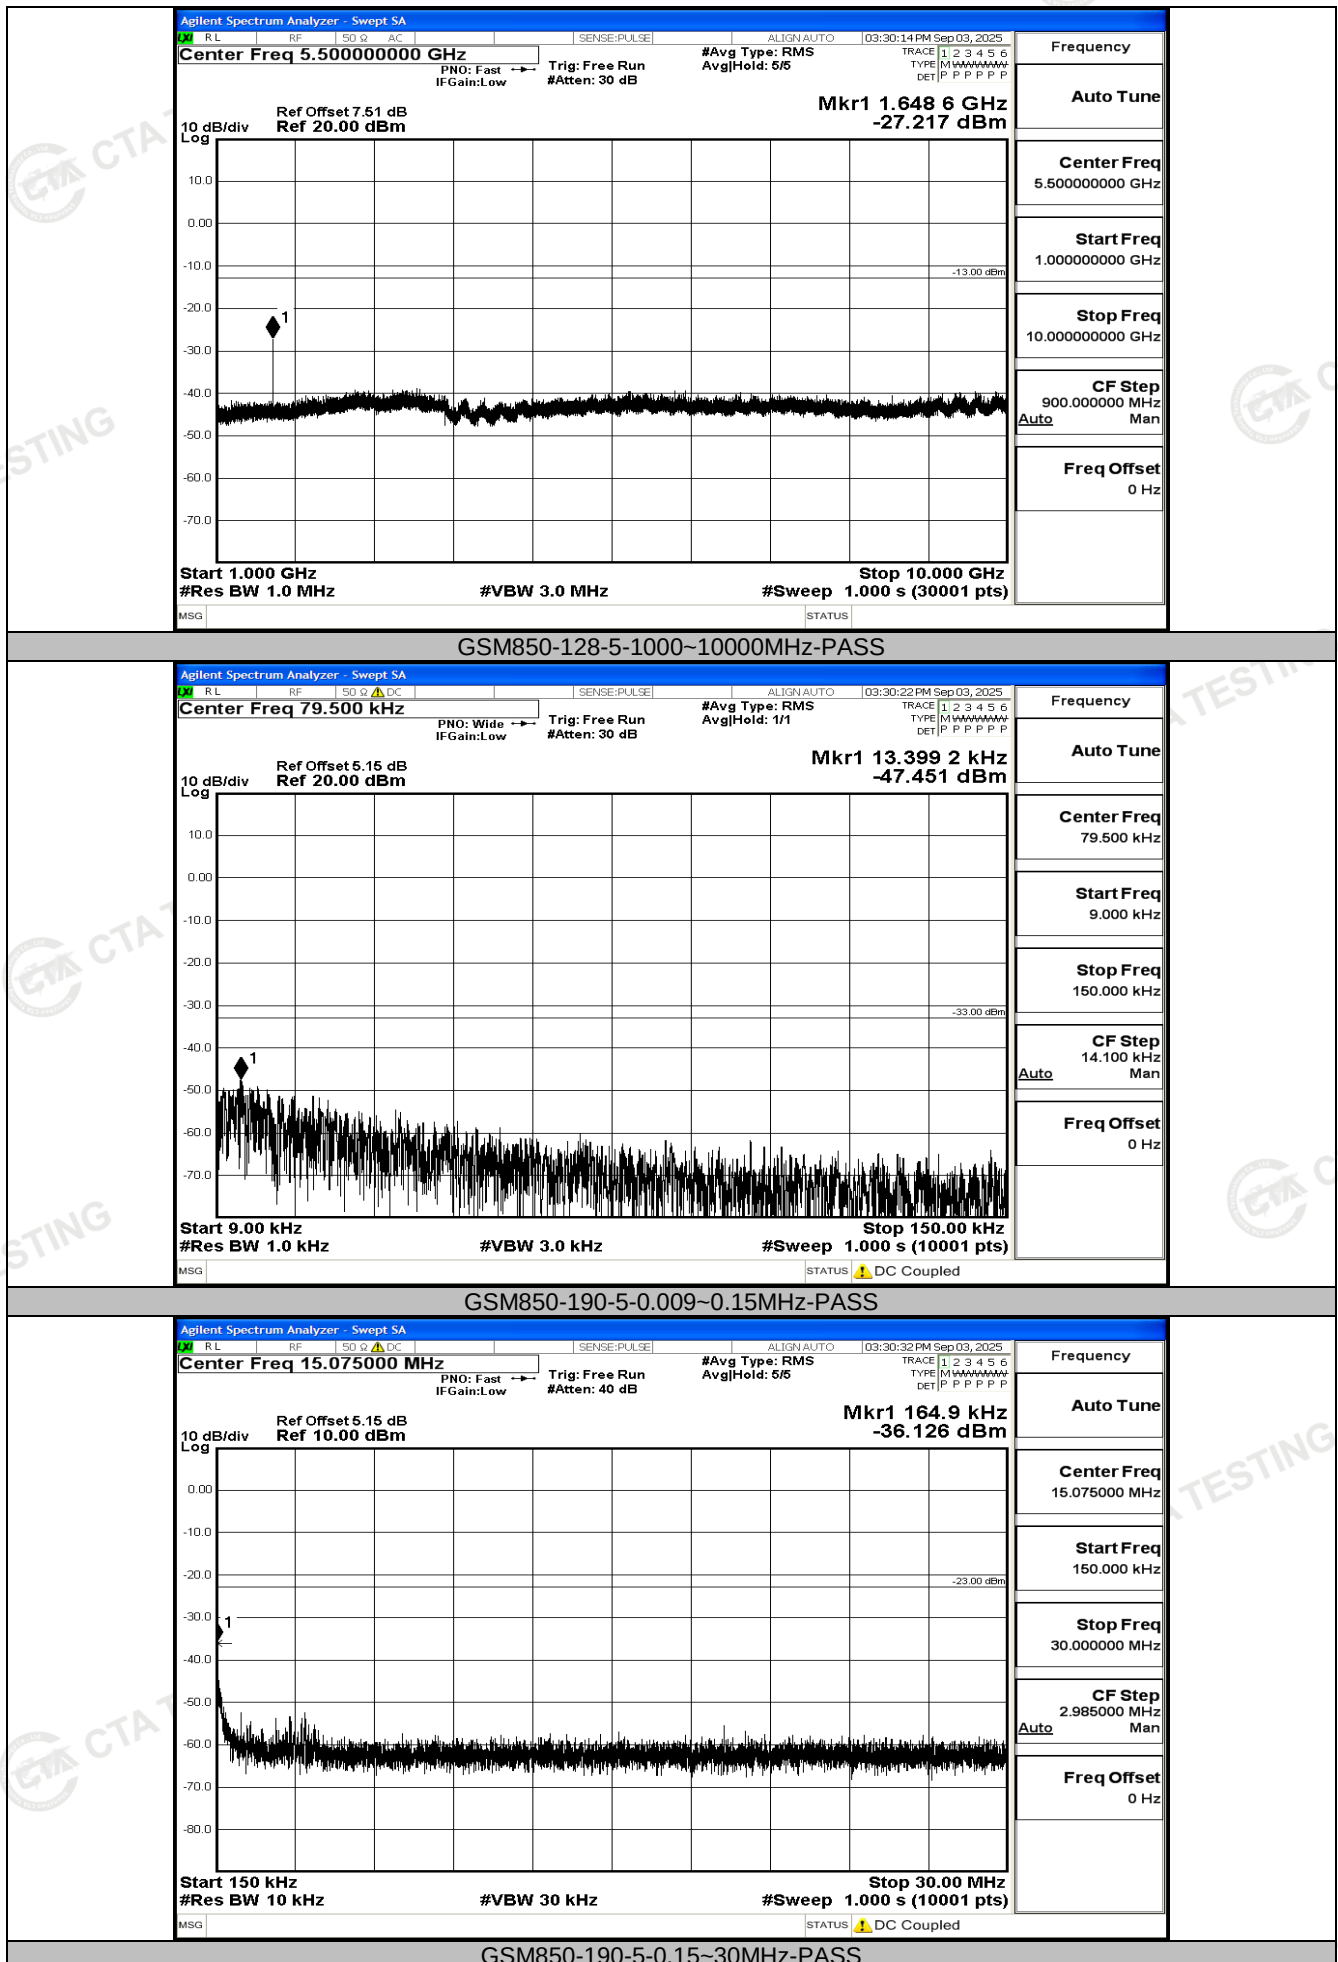


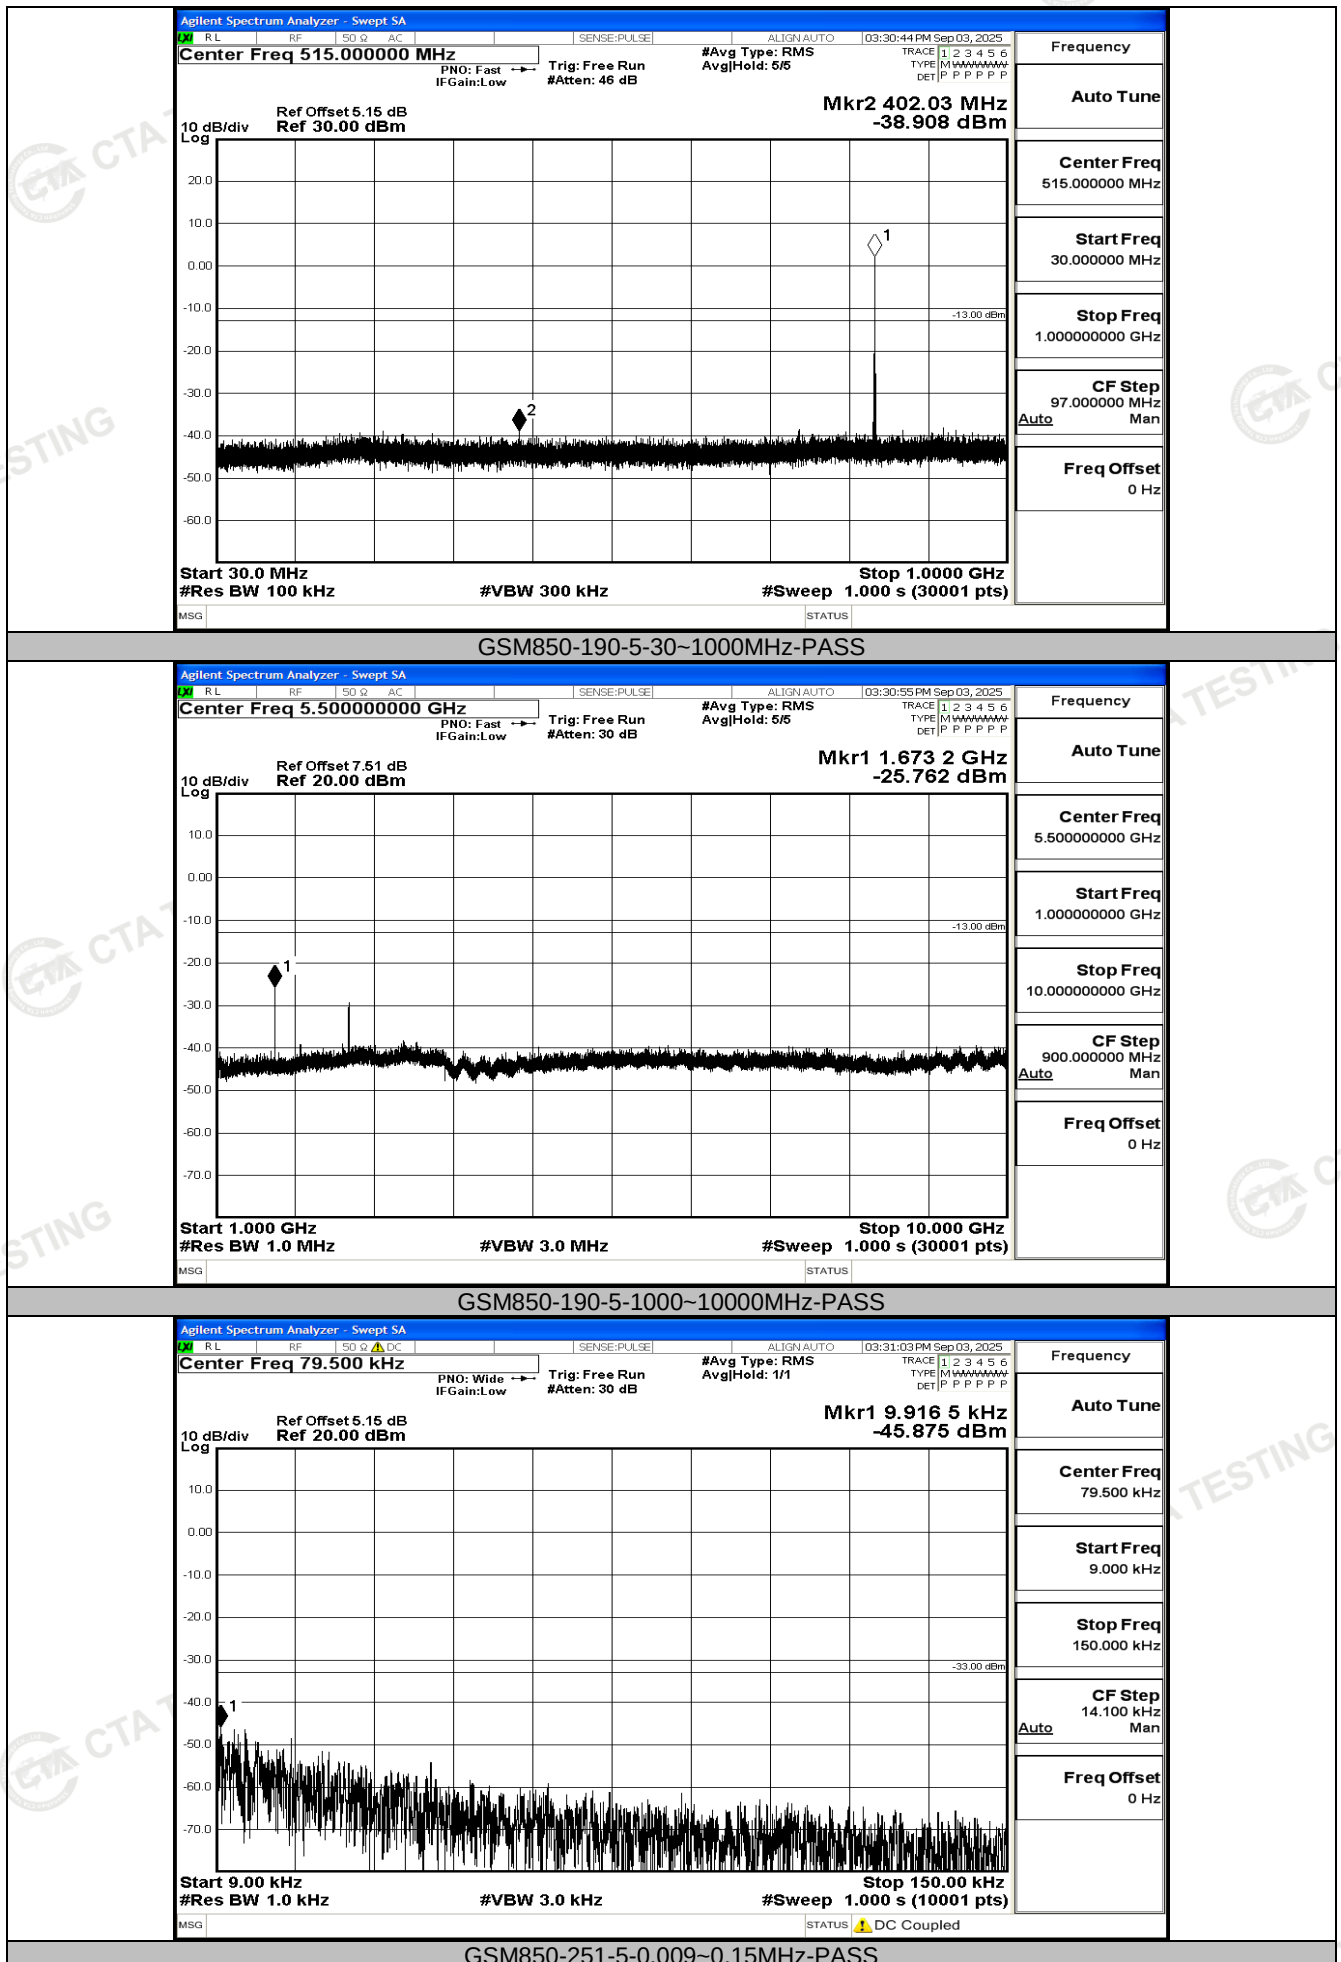


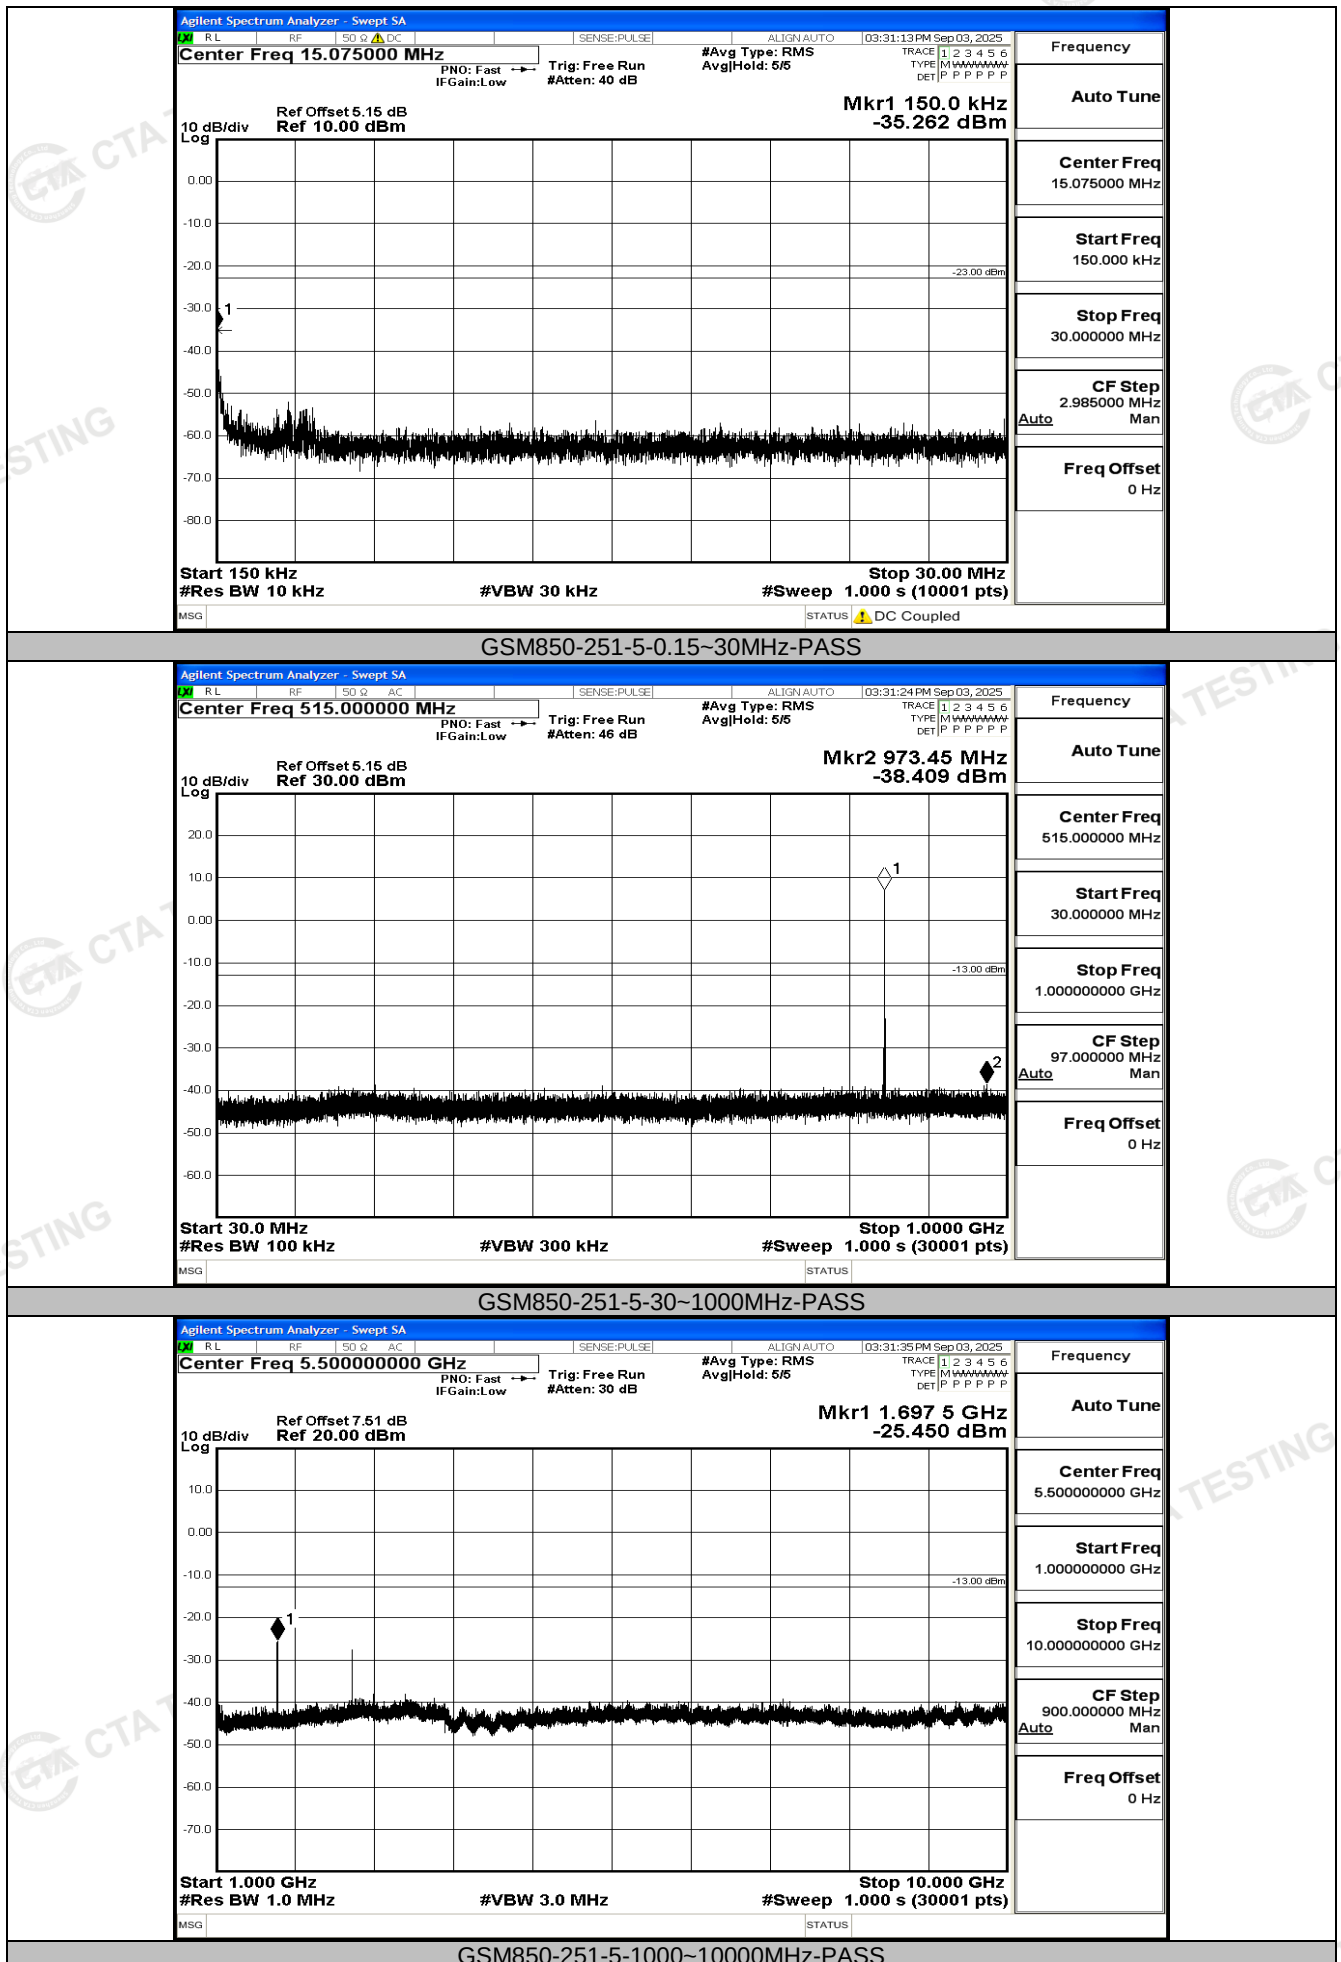


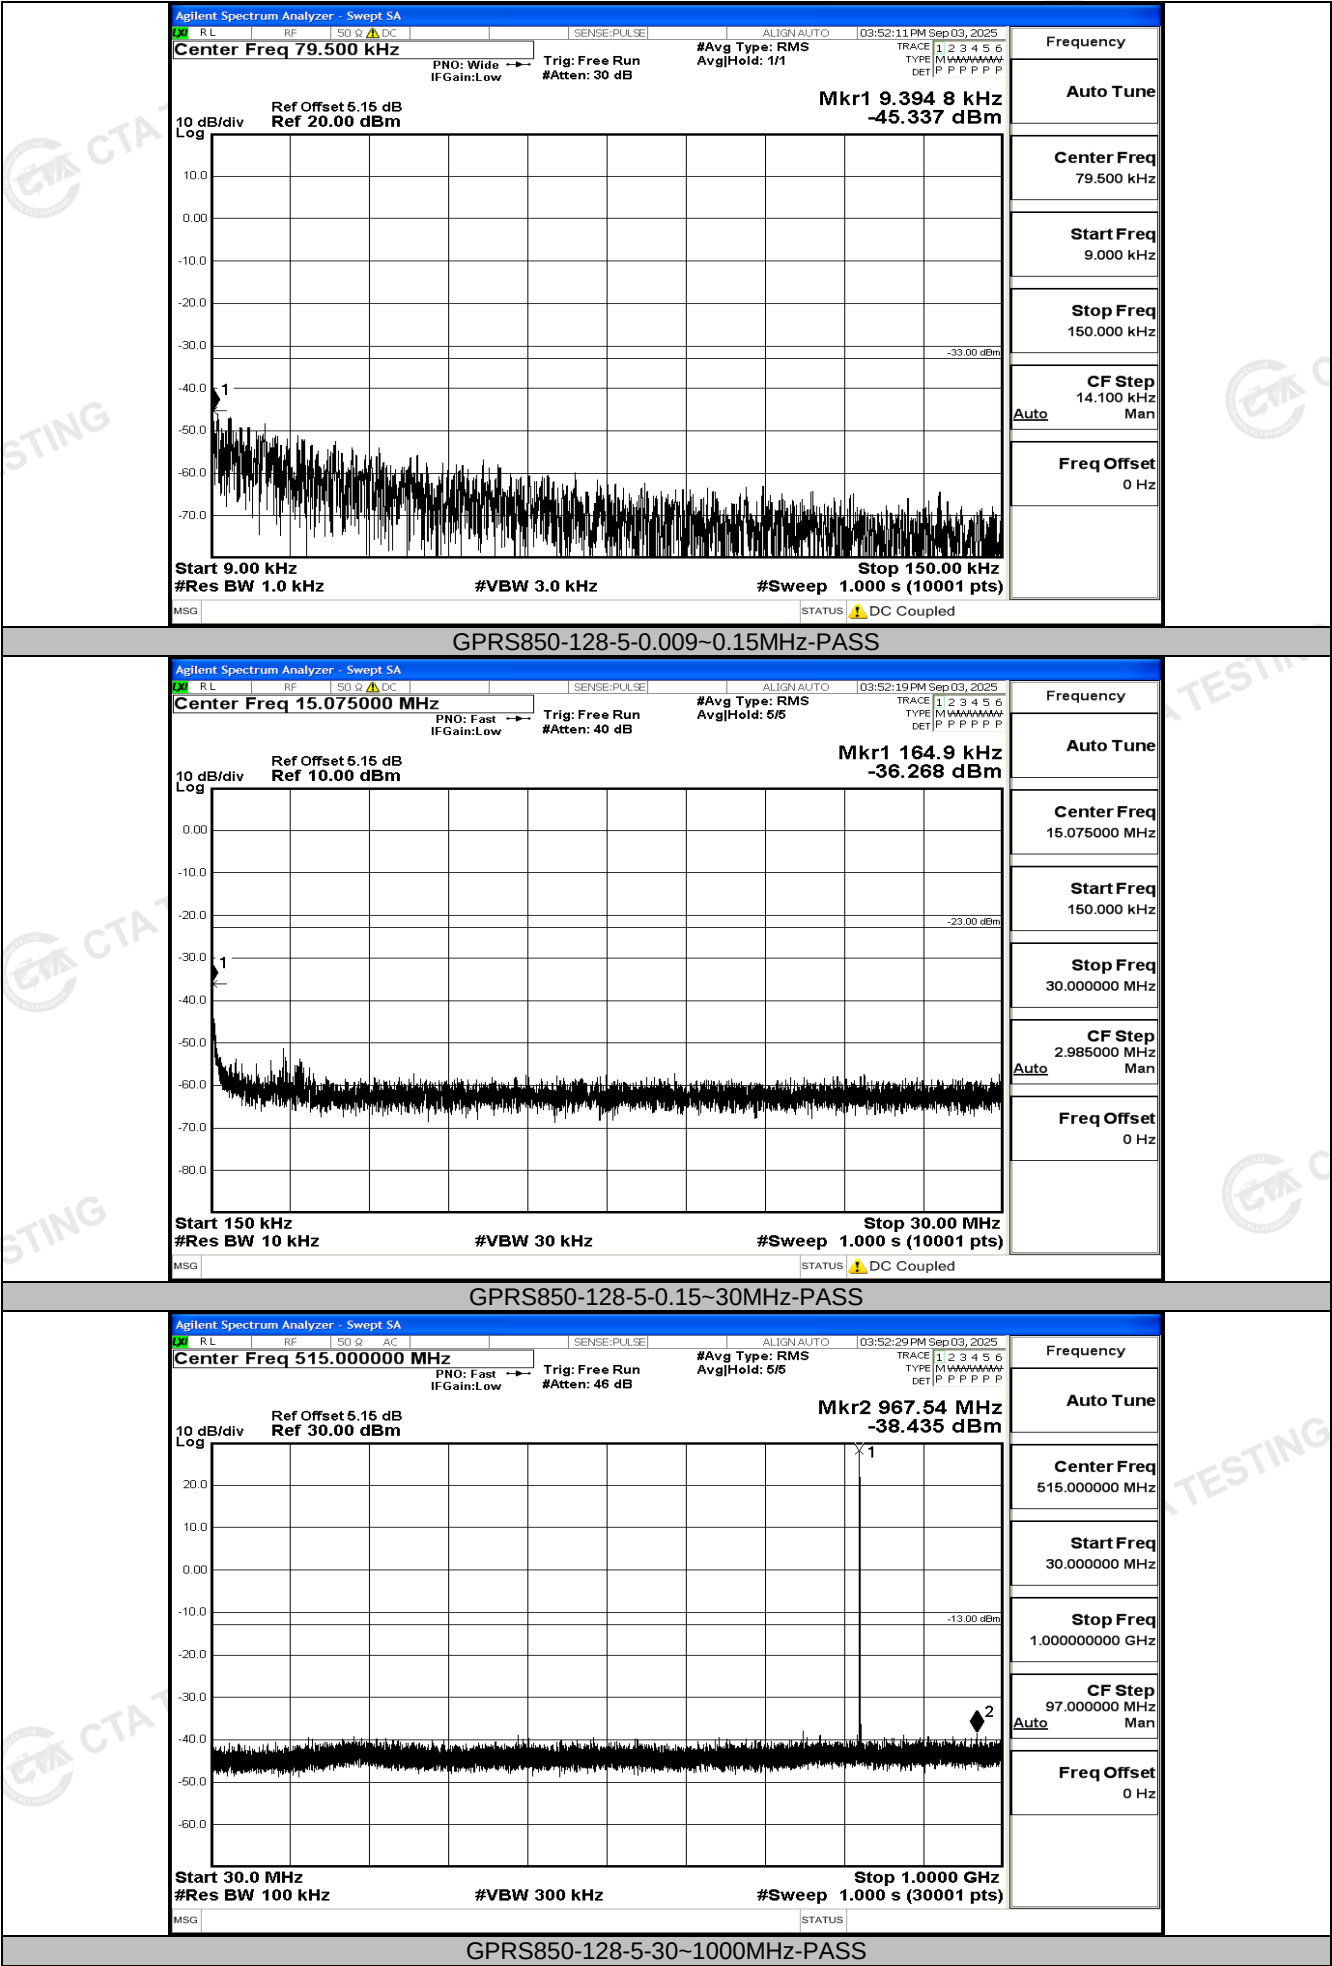


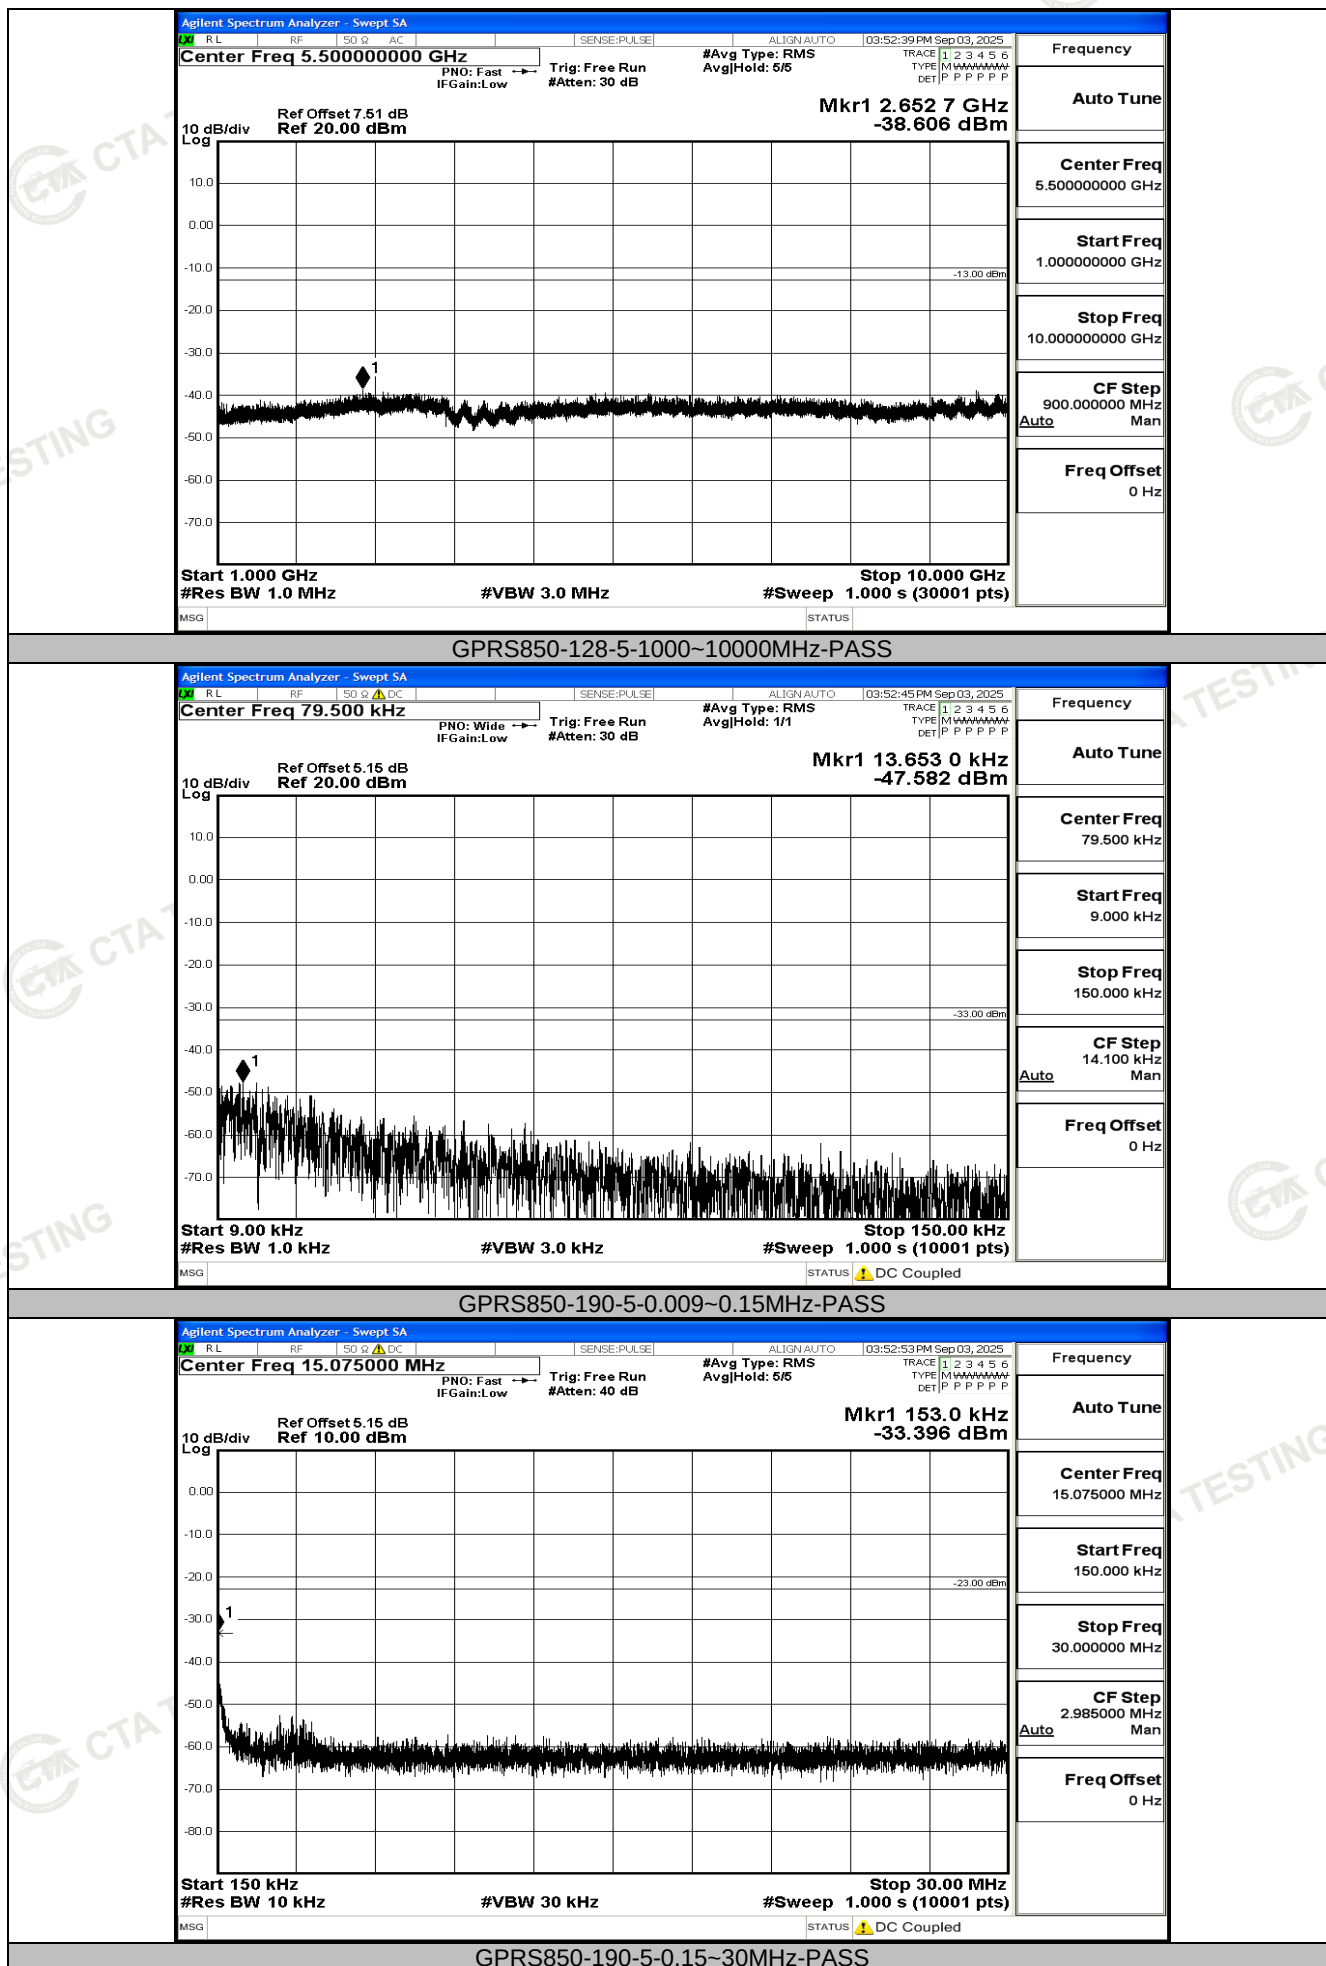


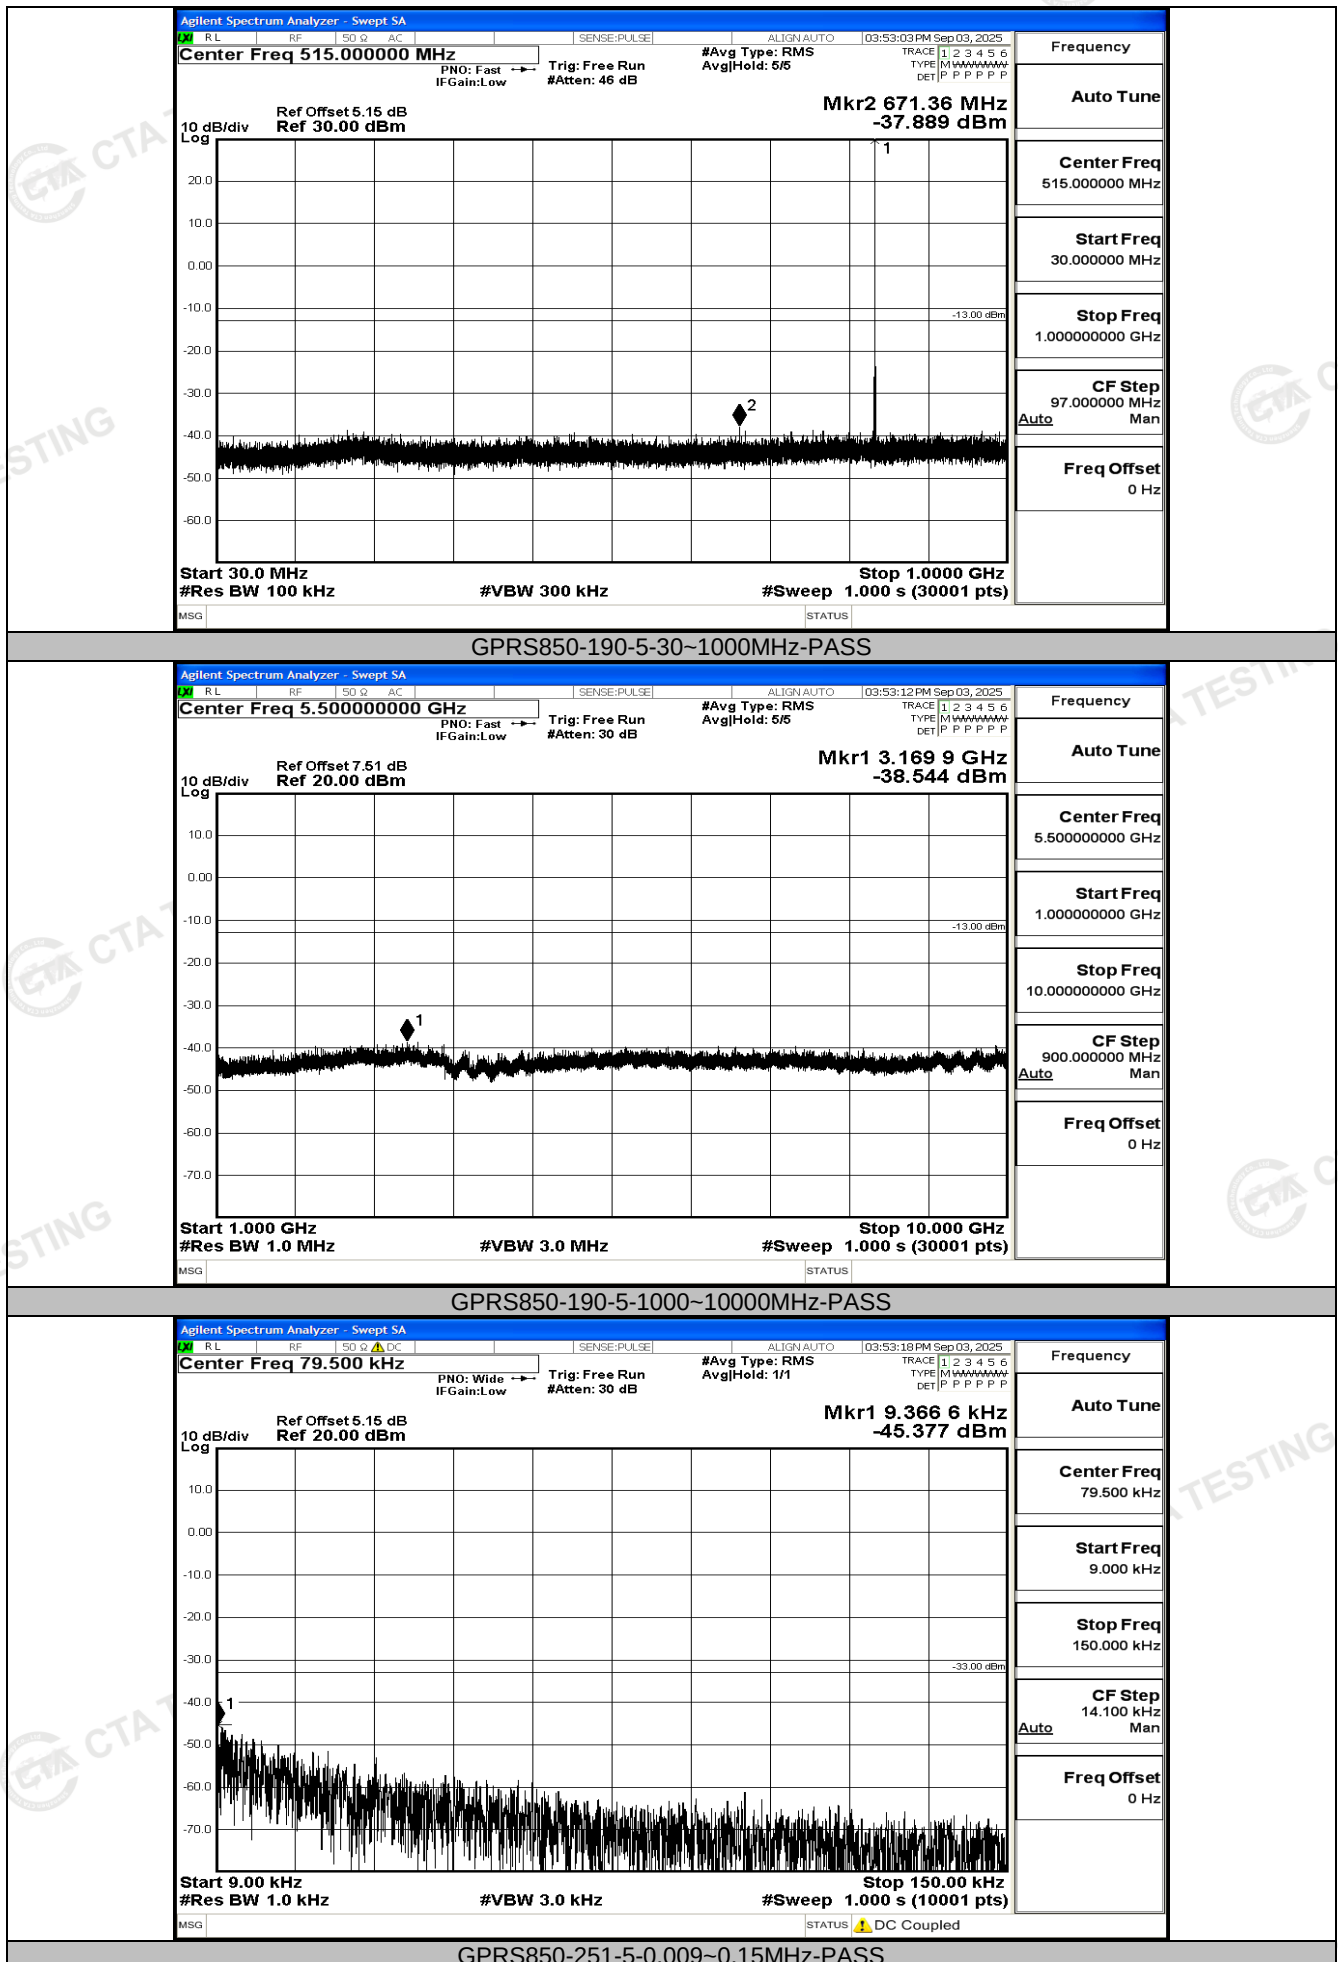


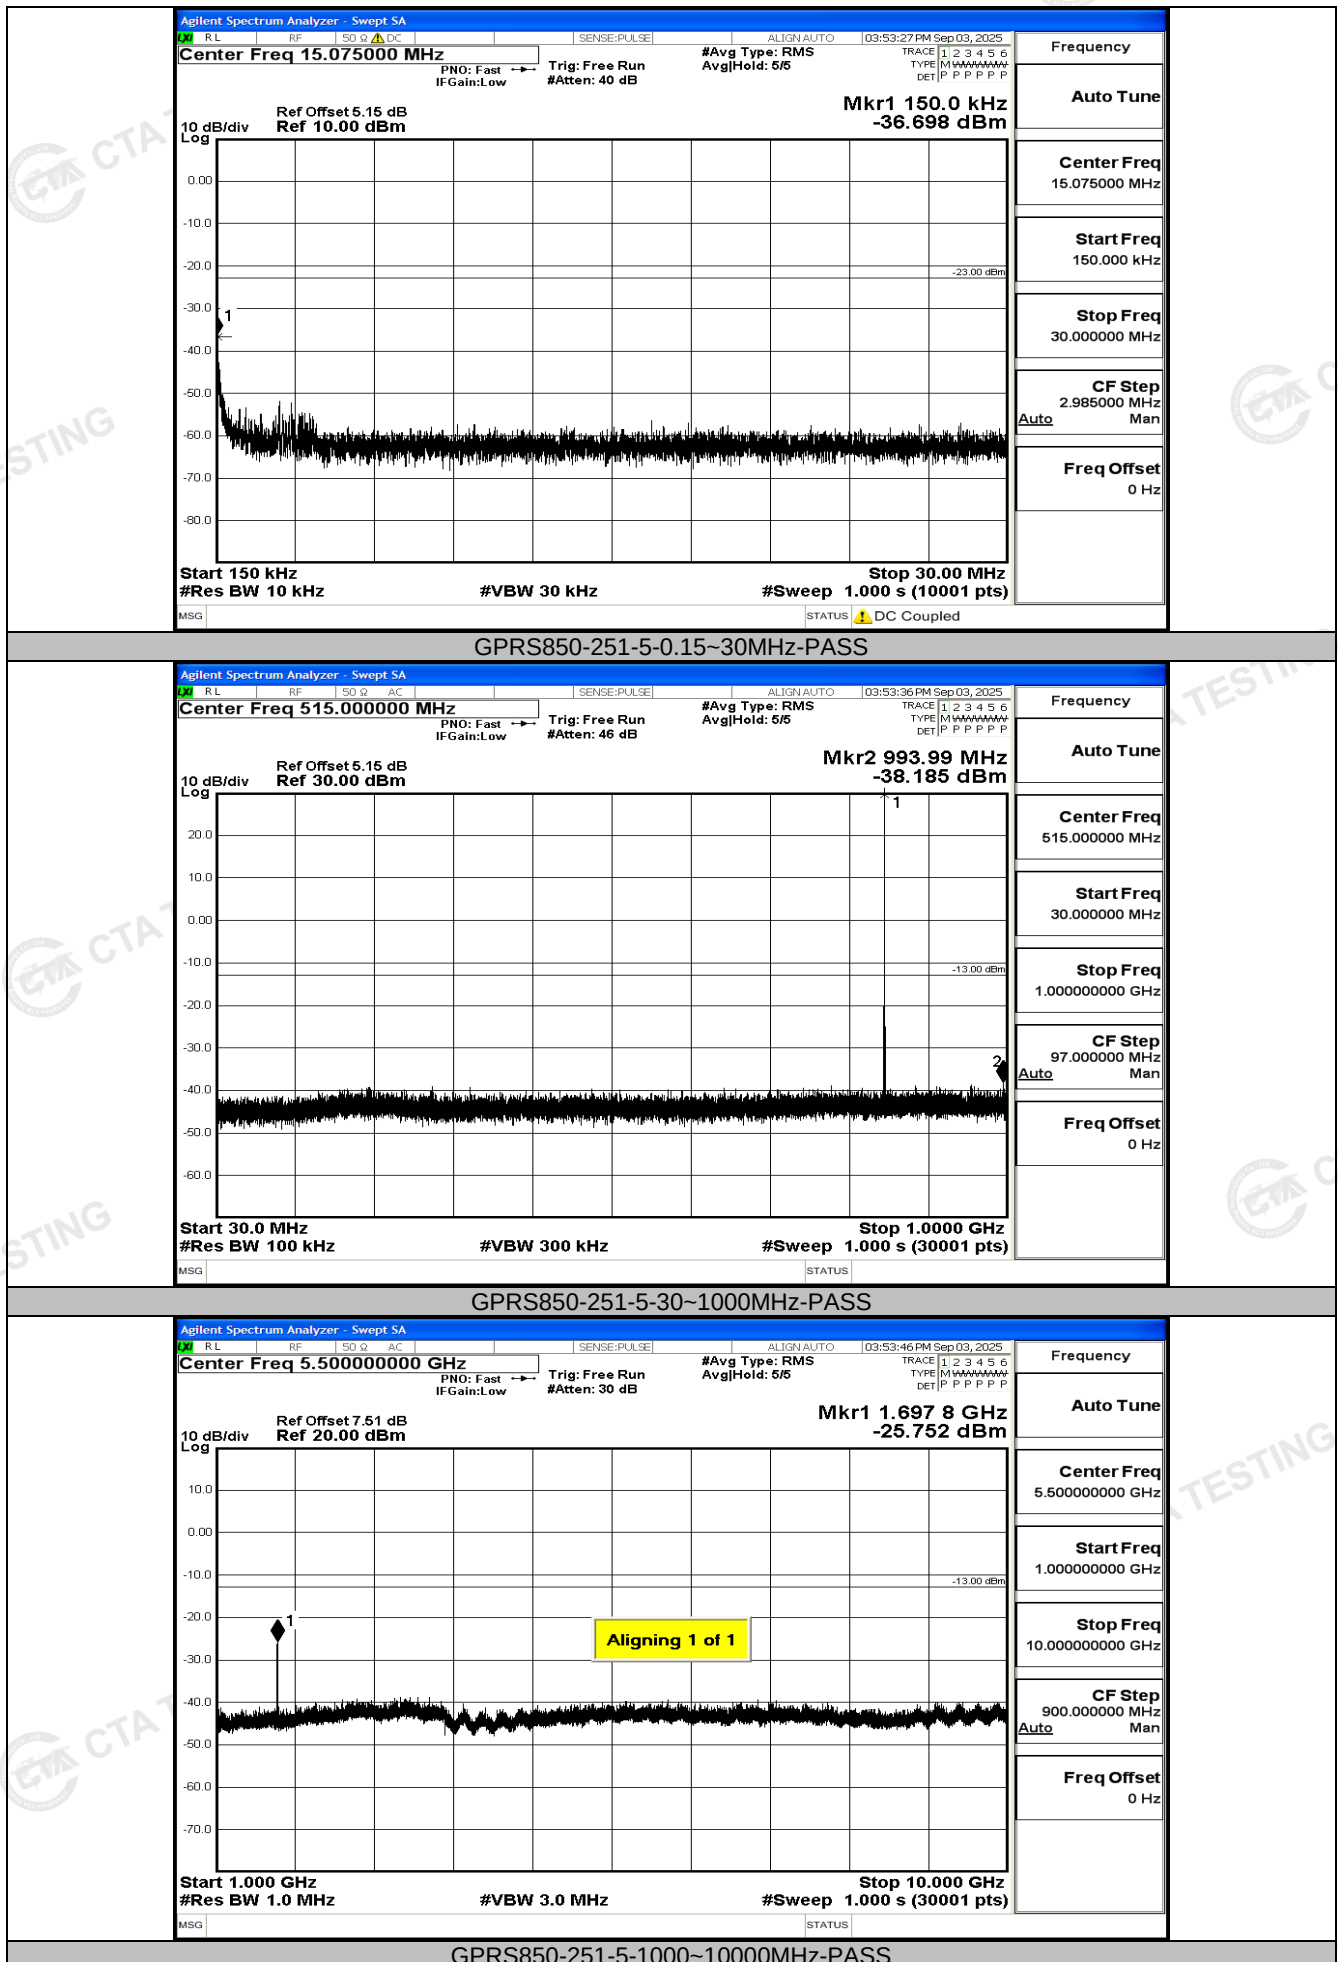

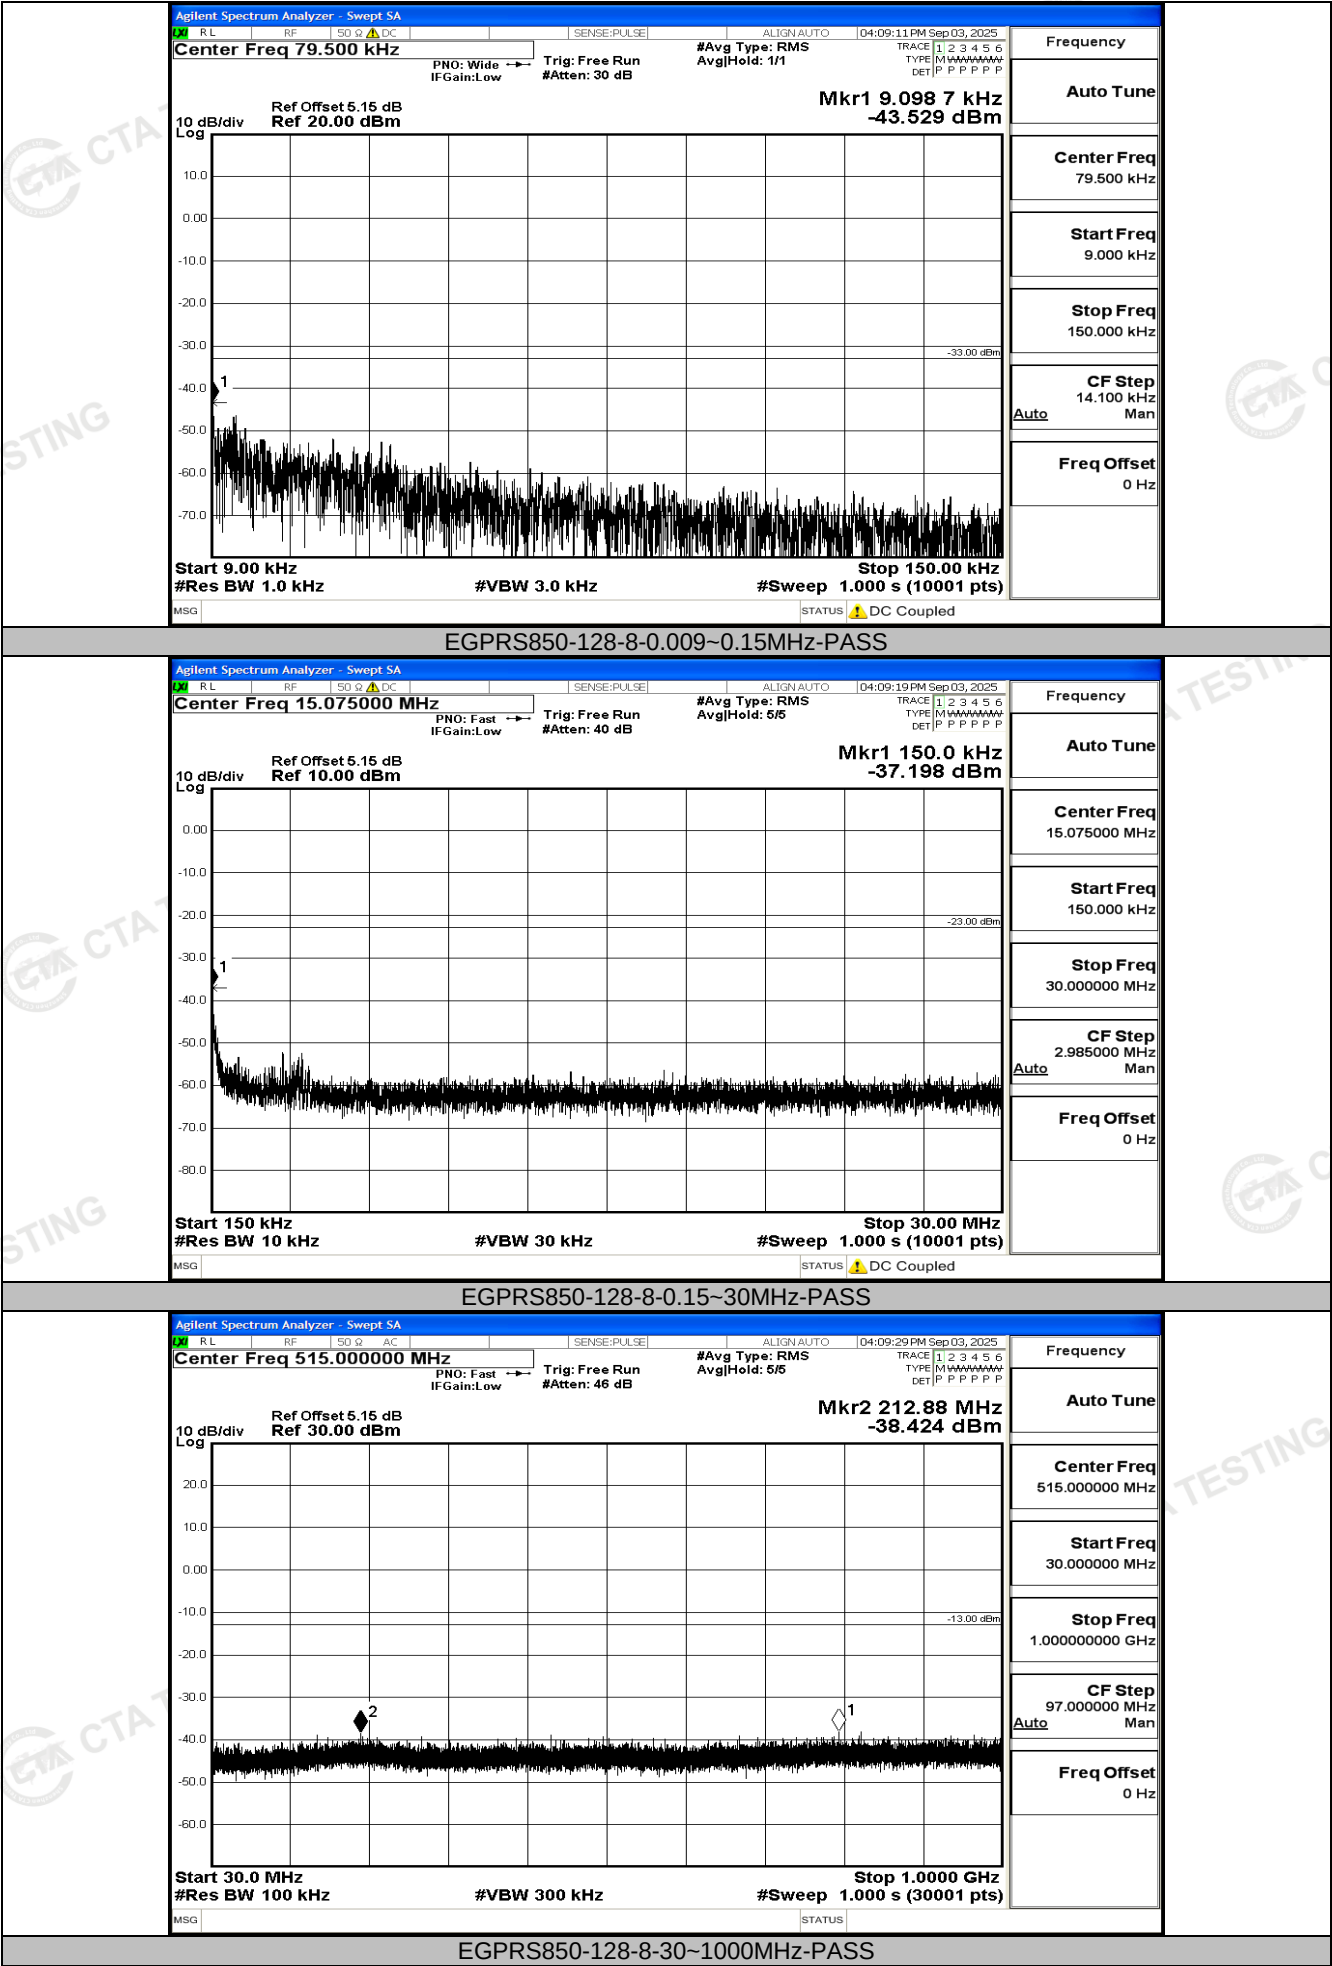

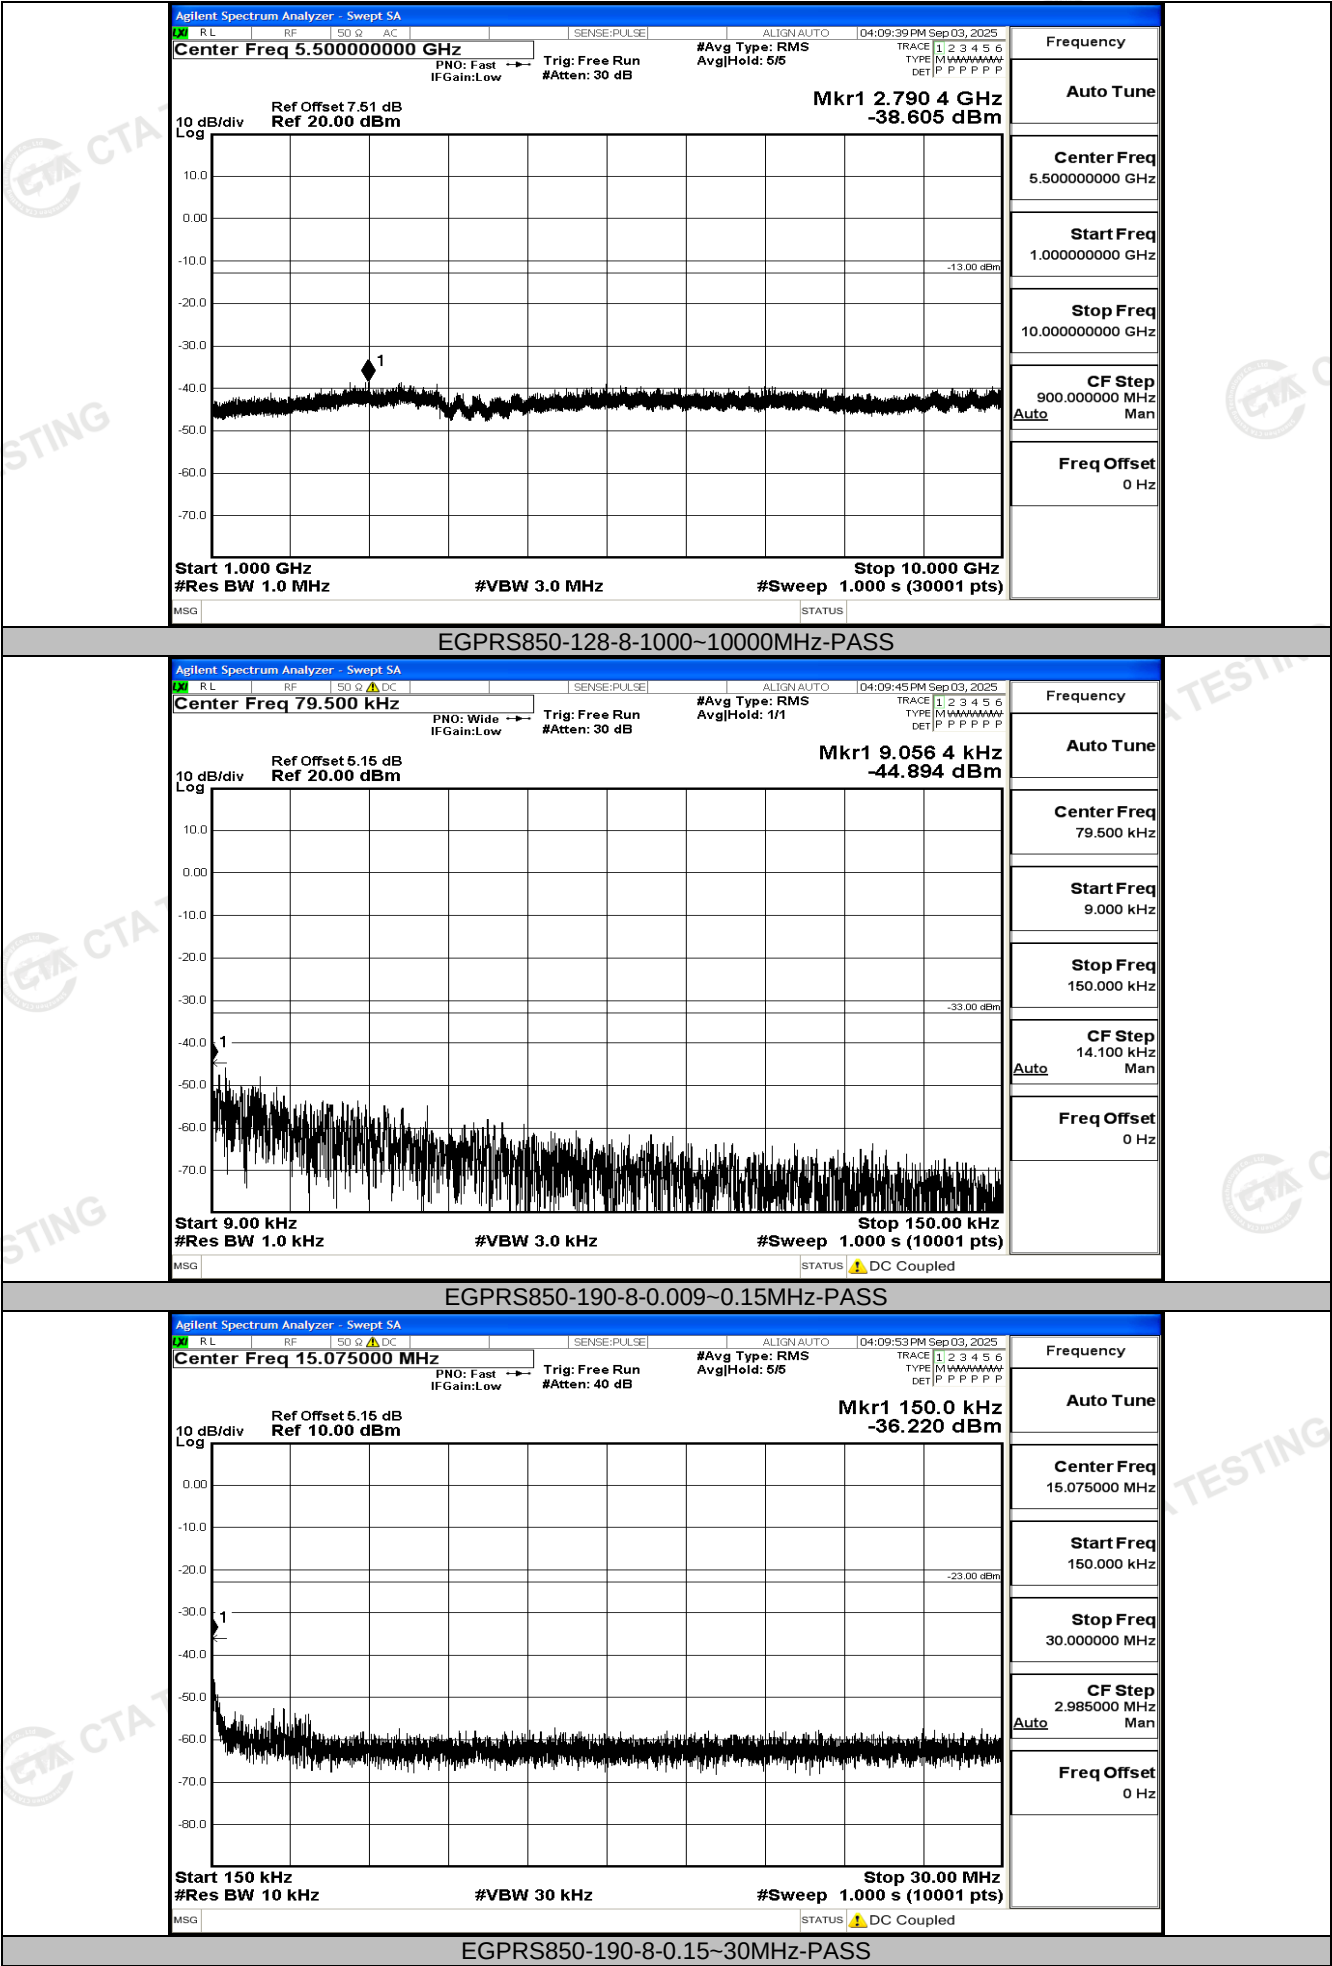

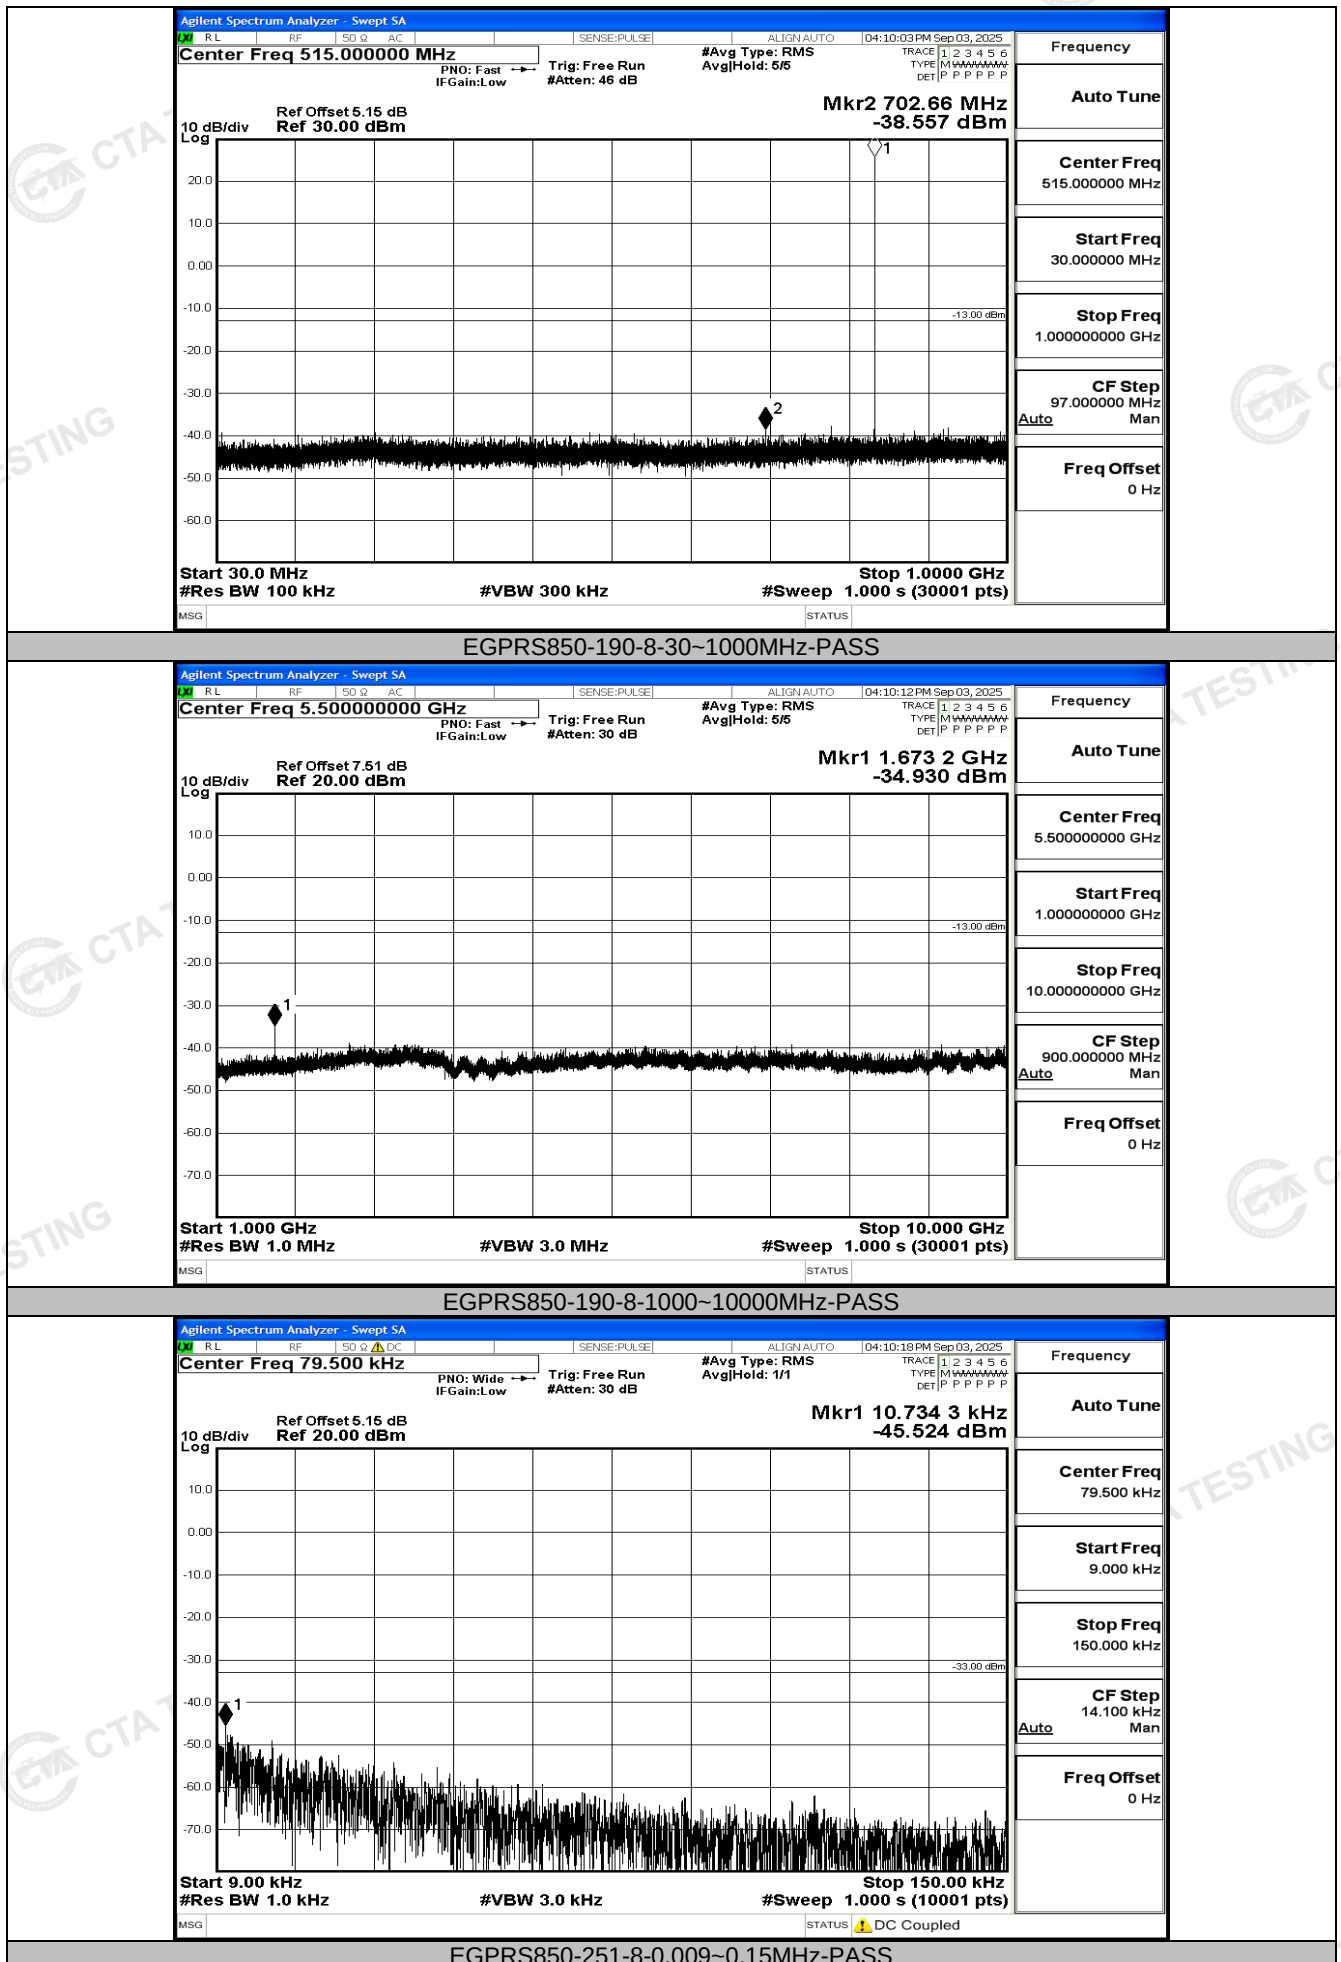

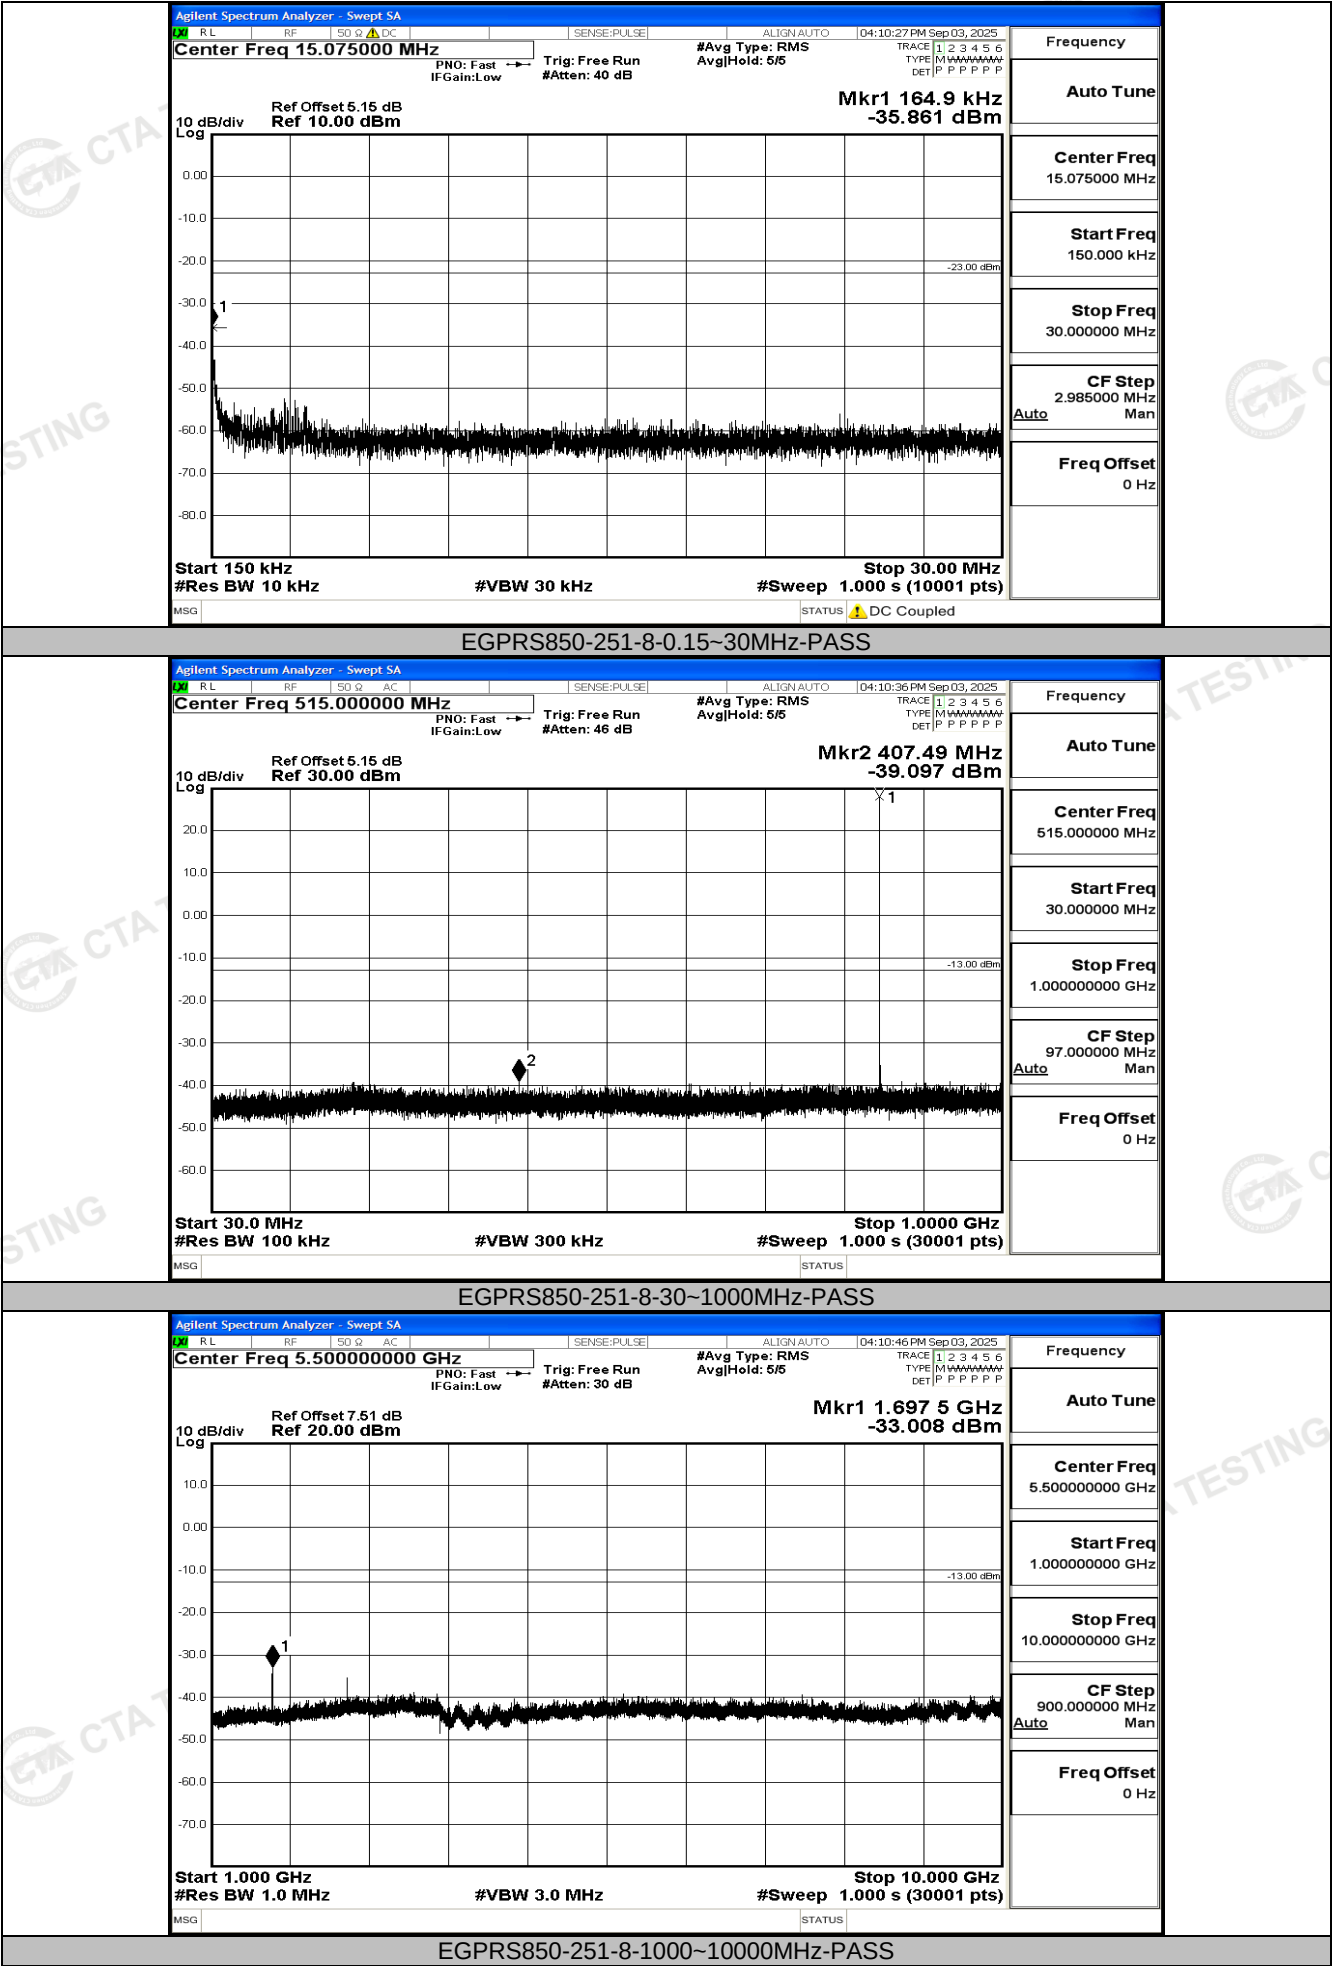

Agilent Spectrum Analyzer - Swept SA

RL

RF

50 Ω

AC

SENSE:PULSE

ALIGN:AUTO

04:10:36 PM Sep 03, 2025

Center Freq 515.000000 MHz

PNO: Fast

IFGain:Low

Trig: Free Run

#Atten: 46 dB

#Avg Type: RMS

AvgHold: 5/5

TRACE 1 2 3 4 5 6

TYPE M W W W W W W W

DET P P P P P P P

Frequency

Auto Tune

Center Freq
515.000000 MHz

Start Freq
30.000000 MHz

Stop Freq
1.00000000 GHz

CF Step
97.000000 MHz
Auto Man

Freq Offset
0 Hz

10 dB/div

Ref Offset 5.15 dB

Ref 30.00 dBm

Mkr2 407.49 MHz

-39.097 dBm

Log

20.0

10.0

0.00

-10.0

-20.0

-30.0

-40.0

-50.0

-60.0

Start 30.0 MHz

#Res BW 100 kHz

#VBW 300 kHz

Stop 1.0000 GHz

#Sweep 1.000 s (30001 pts)

MSG

STATUS

EGPRS850-251-8-30~1000MHz-PASS

Agilent Spectrum Analyzer - Swept SA

RL

RF

50 Ω

AC

SENSE:PULSE

ALIGN:AUTO

04:10:46 PM Sep 03, 2025

Center Freq 5.500000000 GHz

PNO: Fast

IFGain:Low

Trig: Free Run

#Atten: 30 dB

#Avg Type: RMS

AvgHold: 5/5

TRACE 1 2 3 4 5 6

TYPE M W W W W W W W

DET P P P P P P P

Frequency

Auto Tune

Center Freq
5.500000000 GHz

Start Freq
1.000000000 GHz

Stop Freq
10.000000000 GHz

CF Step
900.000000 MHz
Auto Man

Freq Offset
0 Hz

10 dB/div

Ref Offset 7.51 dB

Ref 20.00 dBm

Mkr1 1.697 5 GHz

-33.008 dBm

Log

10.0

0.00

-10.0

-20.0

-30.0

-40.0

-50.0

-60.0

-70.0

Start 1.000 GHz

#Res BW 1.0 MHz

#VBW 3.0 MHz

Stop 10.000 GHz

#Sweep 1.000 s (30001 pts)

MSG

STATUS

EGPRS850-251-8-1000~10000MHz-PASS

