


G206说明书（名称请不要删除）



G206

Instruction Manual

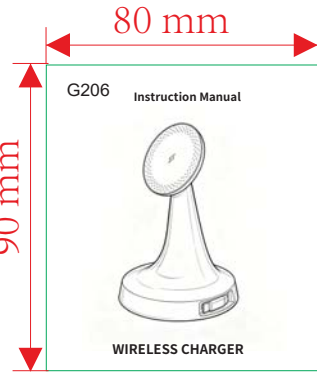

WIRELESS CHARGER



Built-in Magnetic Case



Misaligned Magnetic Ring



Regular Case



Externally Attached Metal Ring

● If your phone cannot charge after using a MagSafe case (due to misalignment of the case's magnetic ring with the phone's charging coil), please replace it with another correct MagSafe case.



User Manual*1



PD 35W Adapter*1



Type C-C Cable*1



Wireless Charging Station

Specifications

Model Number	G206
Input	15V~3A
Phone Wireless Output	15W MAX
Retractable Cable Output	20W MAX (9V~2.22A)
Retractable cable length	1 m

- This product needs to be powered by an adapter with a power of PD 35W and connected to the type-c port. When the indicator is on, it means that the power is connected.
- Operating indicator: The blue indicator stays on when the phone is charging; the indicator goes off when the phone is not charged or when charging; the indicator goes off when the phone is not charged or when charging is fully completed; and the indicator will flash when it has any charging fault.

Introduction:

1. Wireless charging area of mobile phone

2. Retractable USB Type-C Port

2. Operating Indicator

3. Type-C Port



Important Safety Instructions

- Do not store device in high-temperature environment, including heat caused by intense sunlight or other forms of heat.
- Do not place device in fire or other excessively hot environments. Exposure to fire or temperature above 212°F(100°C) may cause explosion.
- Do not use the wireless charger in excess of its output rating. Over loading outputs above rating may result in a risk of fire or injury to persons.
- Do not expose the wireless charger to rain or snow.
- Do not plug or unplug electrical appliances with wet hands. For your safety;
- Do not place in a place easily accessible to infants and young children;
- Do not modify, repair or disassemble the unity, if so, please contact the manufacturer. Switch off the wireless charger when not in use. The wireless charger will automatically switch off when disconnected from its wall charger.

Attention

1. Do not use protective covers thicker than 5mm when charging devices and do not use a protective cover with metal sheet.

2. Do not put metal foreign objects in the charging area.

3. When charging, please aim the device at the center of the charging area.

4. It is recommended that the temperature should not exceed 28°C, which will affect the charging speed.

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more

of the following measures:
-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.

FCC RF exposure statement:
The equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance between 20cm the radiator your body.

