

FCC ID WIFI 2.4

FCC_2.4G_WIFI (Part15.247) Test Data

FCC ID:2BMR6-W30

Product : Window Cam W30

Model Name : W30, W30A, W30B, W30C, W30D, W30F, W30G,
W30M, W30S, W30W

Brand : N/A

Report No. : NCT26037367XE1-2

Prepared for

MEGA MULTIMEDIA AI, INC.

6565 Sunset Blvd Ste 402, Los Angeles, CA 90028 United States

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.

**A101, B2, Fuqiao 6th Area, xintian Community, Fuhai Street, Baoan District, Shenzhen,
China**


TEL: 400-8868-419

Table of Contents


1. -6dB Bandwidth	3
2. 99% Occupied Bandwidth	13
3. Duty Cycle	23
4. MAX. Output Power	33
5. Power Spectral Density	34
6. Bandedge	44
7. Spurious Emission	57

1. -6dB Bandwidth


Condition	Antenna	Modulation	Frequency (MHz)	-6dB BW(MHz)	limit(kHz)	Result
NVNT	ANT1	802.11b	2412.00	9.30	500	Pass
NVNT	ANT1	802.11b	2437.00	9.25	500	Pass
NVNT	ANT1	802.11b	2462.00	9.24	500	Pass
NVNT	ANT1	802.11g	2412.00	16.42	500	Pass
NVNT	ANT1	802.11g	2437.00	16.53	500	Pass
NVNT	ANT1	802.11g	2462.00	16.42	500	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	17.44	500	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	17.72	500	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	17.63	500	Pass
NVNT	ANT1	802.11ax(HE20)	2412.00	18.73	500	Pass
NVNT	ANT1	802.11ax(HE20)	2437.00	18.87	500	Pass
NVNT	ANT1	802.11ax(HE20)	2462.00	18.84	500	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	35.86	500	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	36.37	500	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	36.63	500	Pass
NVNT	ANT1	802.11ax(HE40)	2422.00	37.48	500	Pass
NVNT	ANT1	802.11ax(HE40)	2437.00	37.76	500	Pass
NVNT	ANT1	802.11ax(HE40)	2452.00	37.92	500	Pass

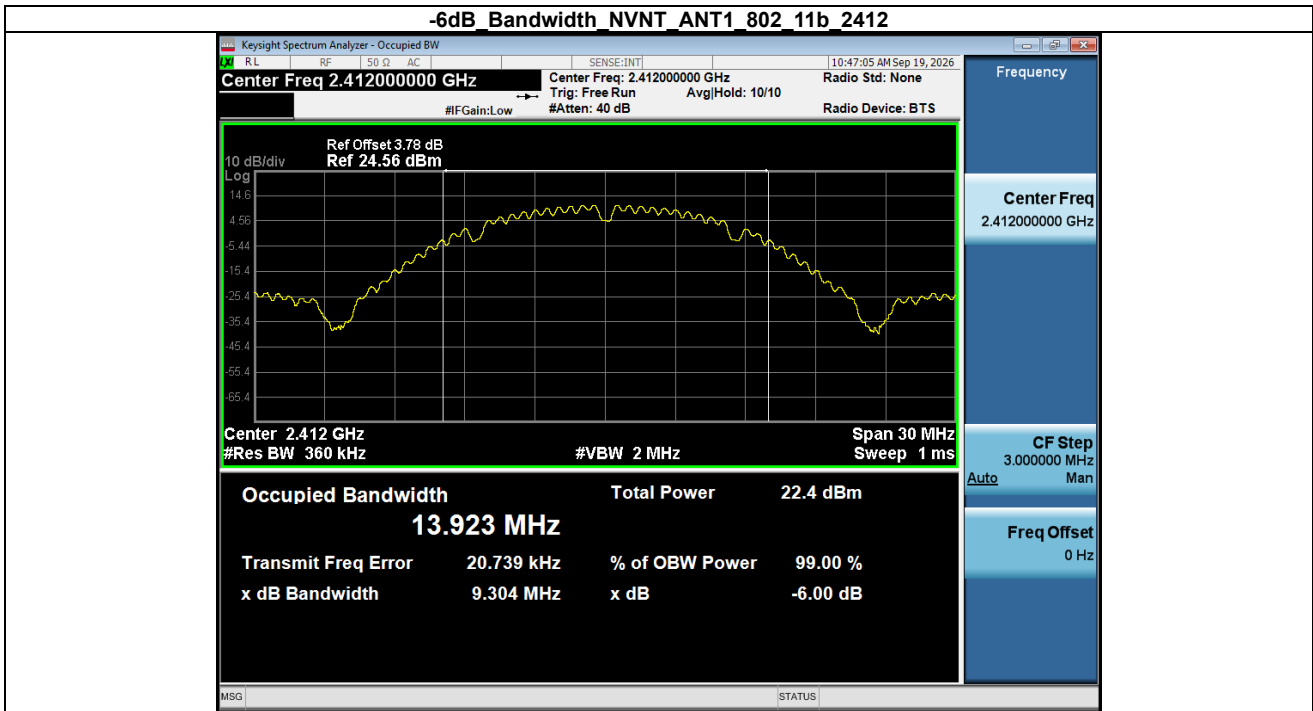


-6dB_Bandwidth_NVNT_ANT1_802_11b_2437

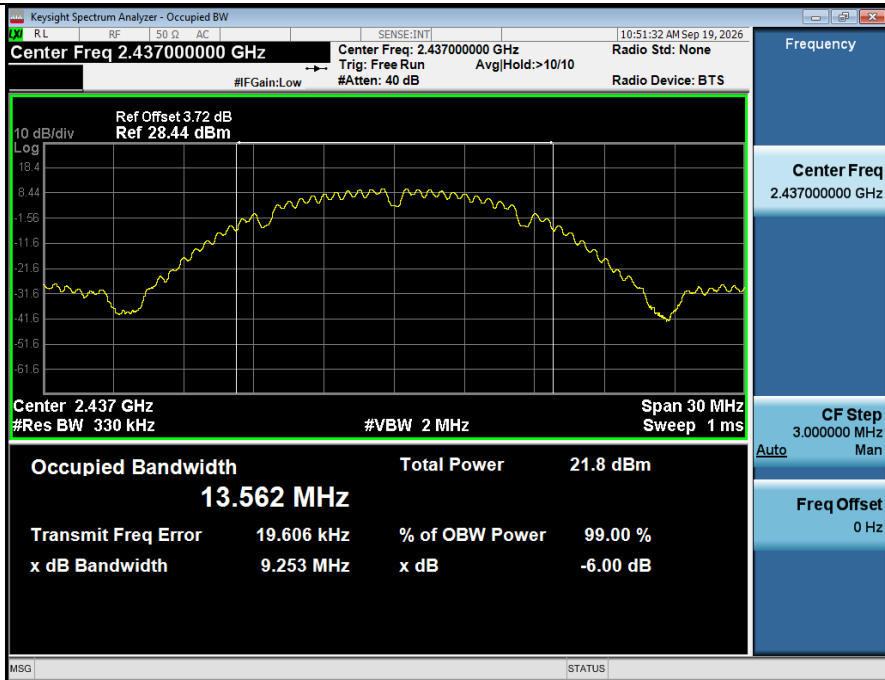

-6dB_Bandwidth_NVNT_ANT1_802_11b_2462

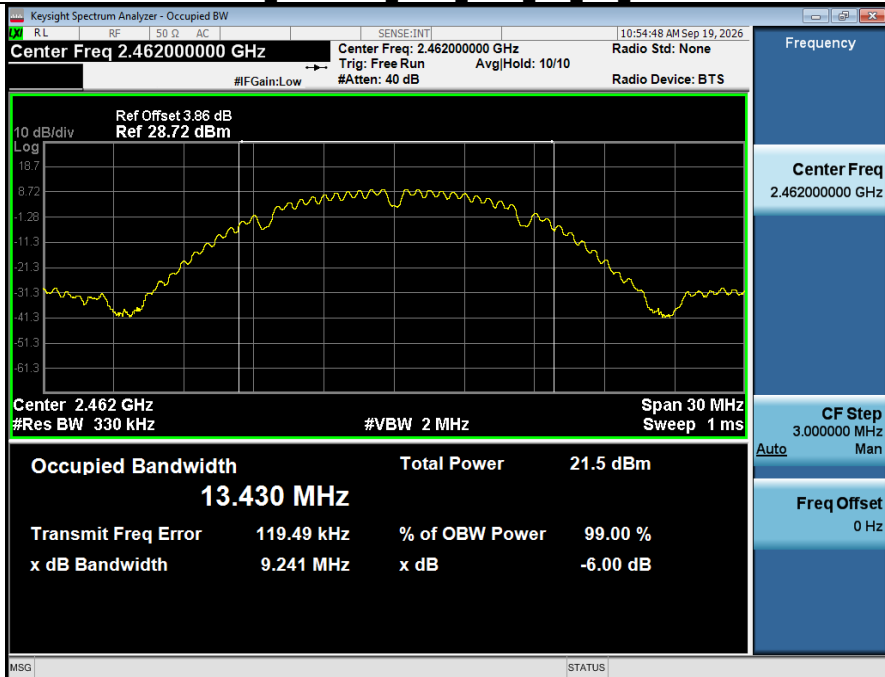


-6dB_Bandwidth_NVNT_ANT1_802_11g_2412

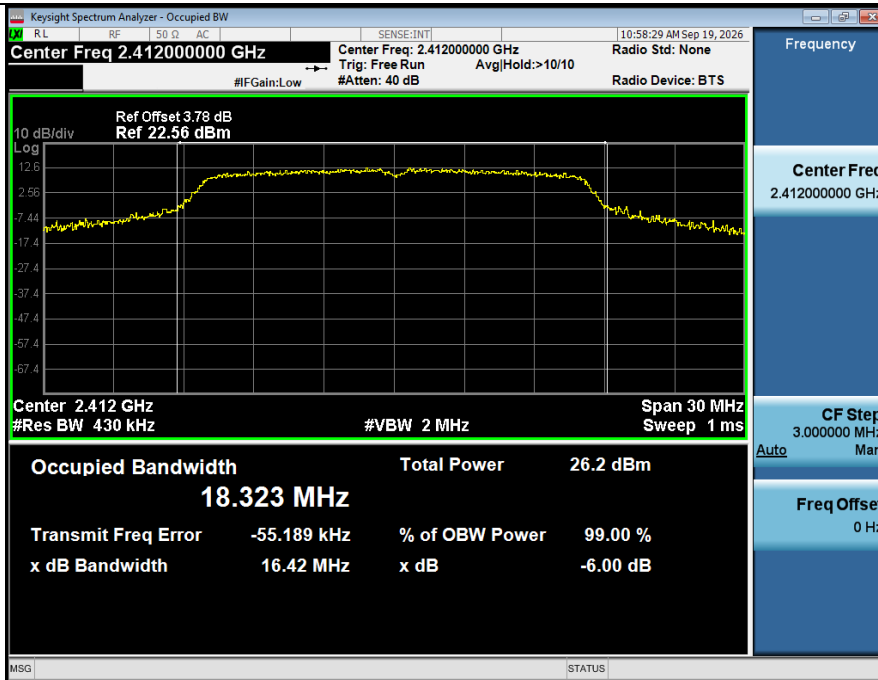


-6dB_Bandwidth_NVNT_ANT1_802_11g_2437




-6dB_Bandwidth_NVNT_ANT1_802_11g_2462

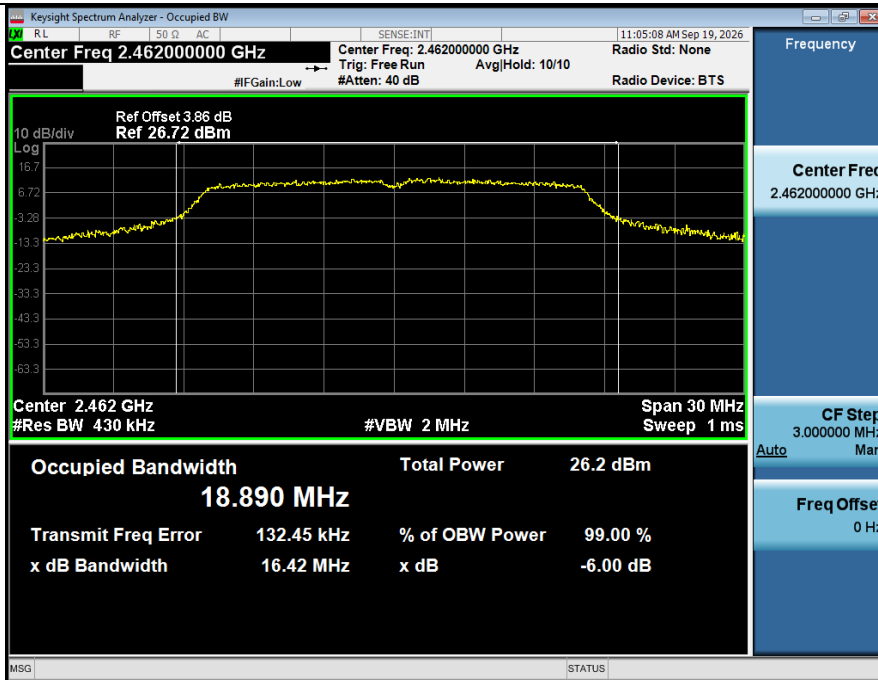


-6dB_Bandwidth_NVNT_ANT1_802_11n(HT20)_2412

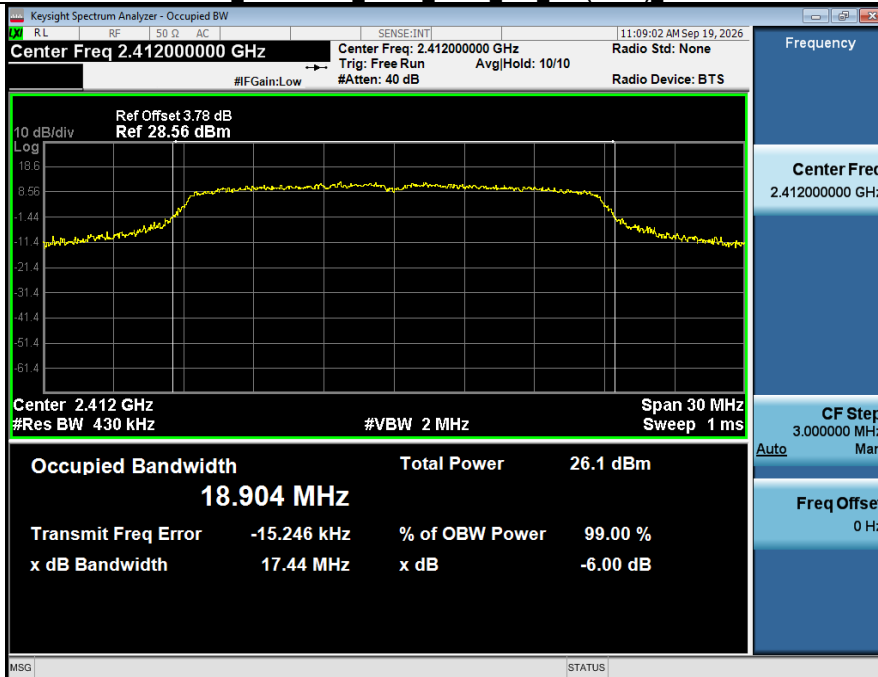


-6dB_Bandwidth_NVNT_ANT1_802_11n(HT20)_2437

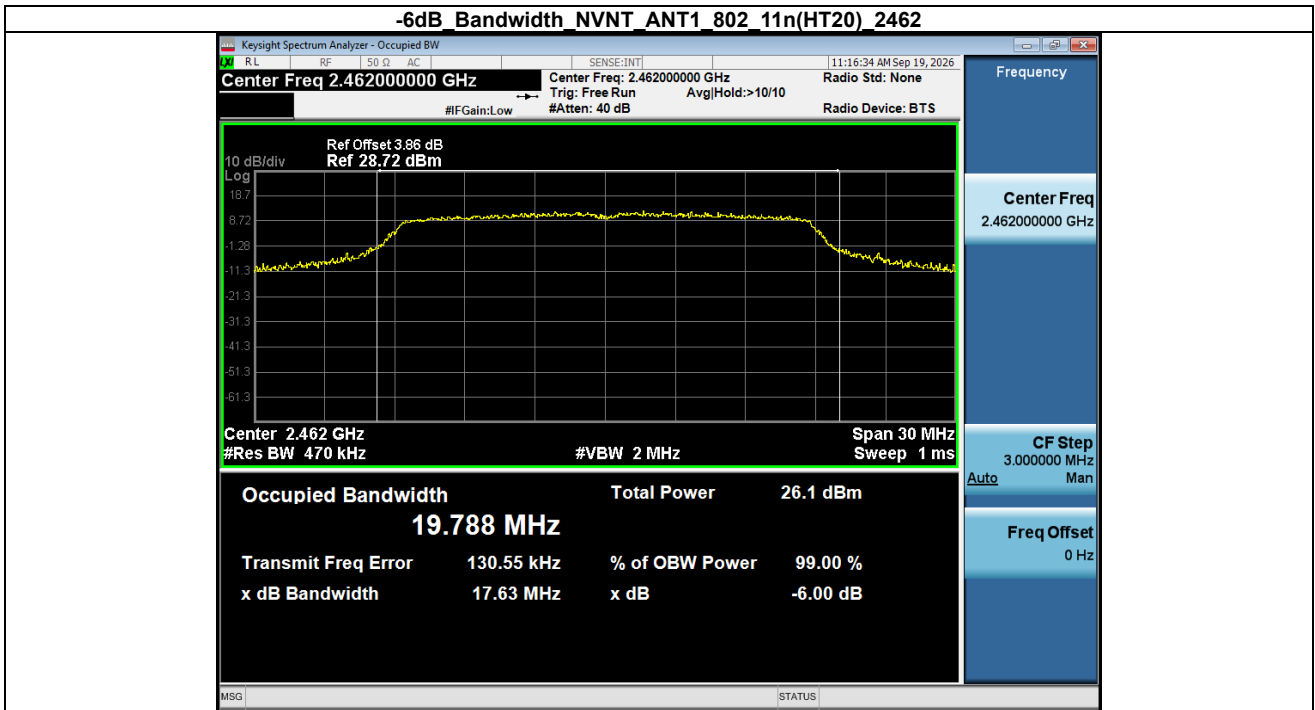


-6dB_Bandwidth_NVNT_ANT1_802_11ax(HE20)_2412

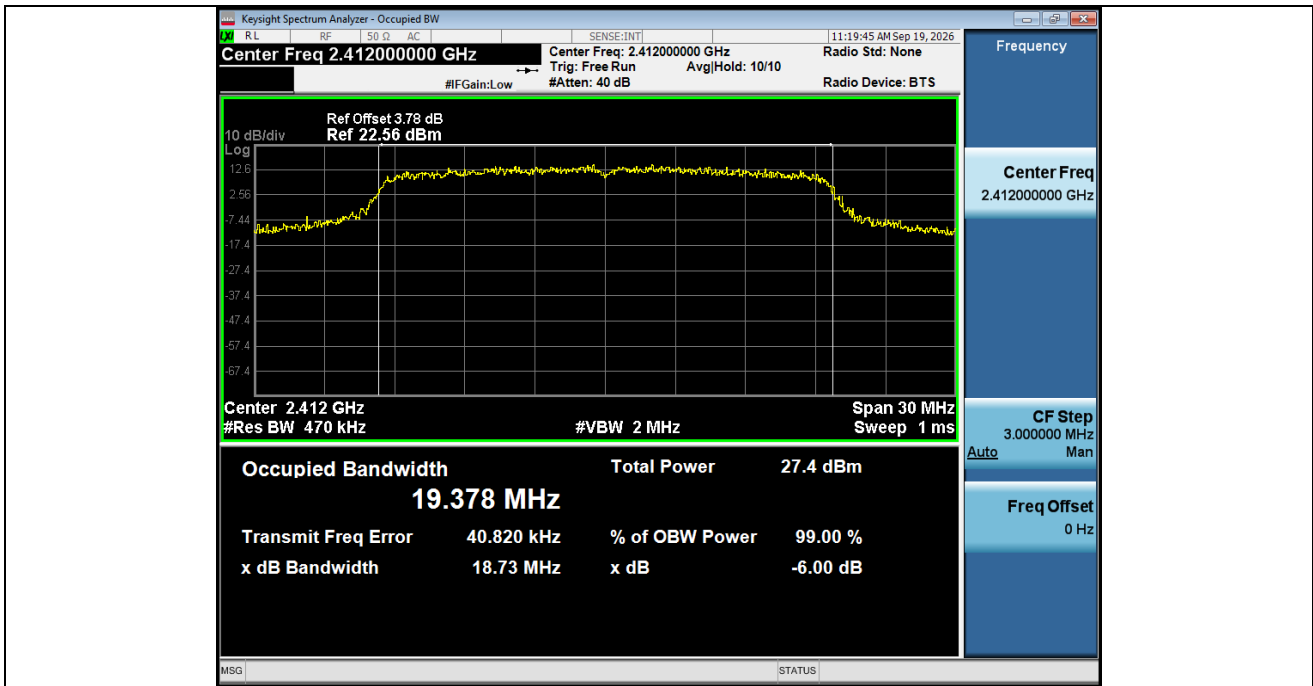


-6dB_Bandwidth_NVNT_ANT1_802_11ax(HE20)_2437

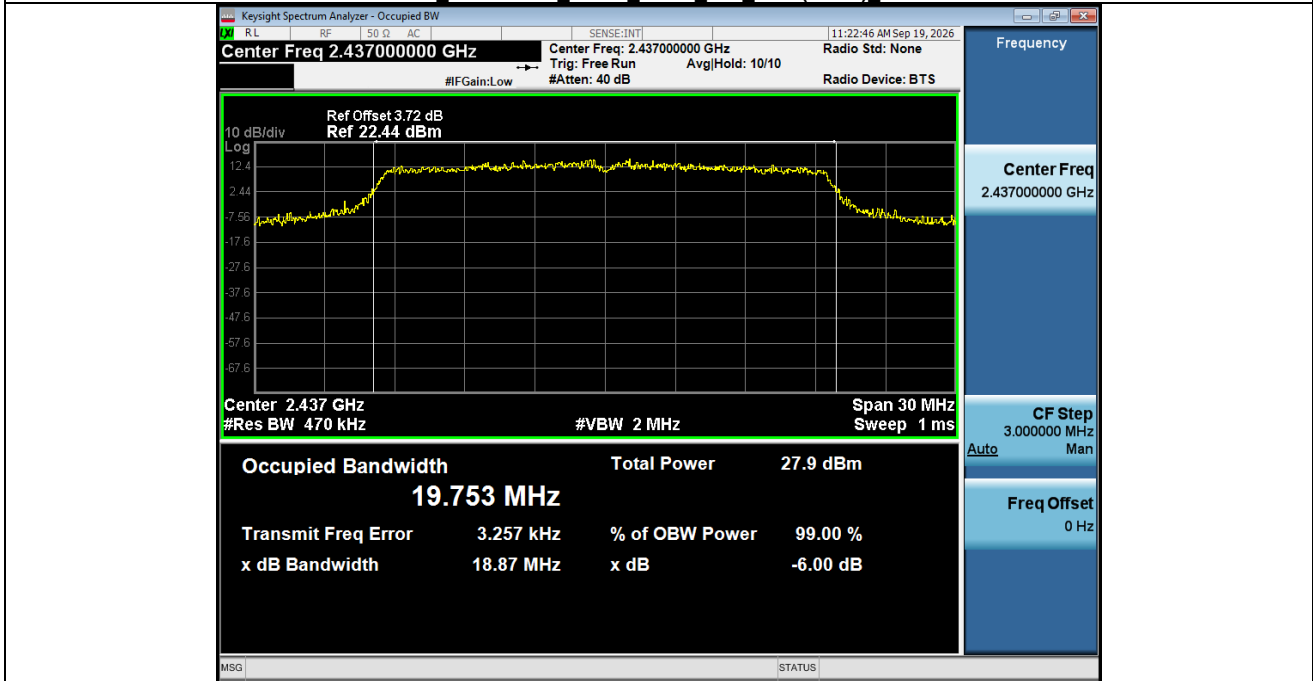


-6dB_Bandwidth_NVNT_ANT1_802_11ax(HE20)_2462

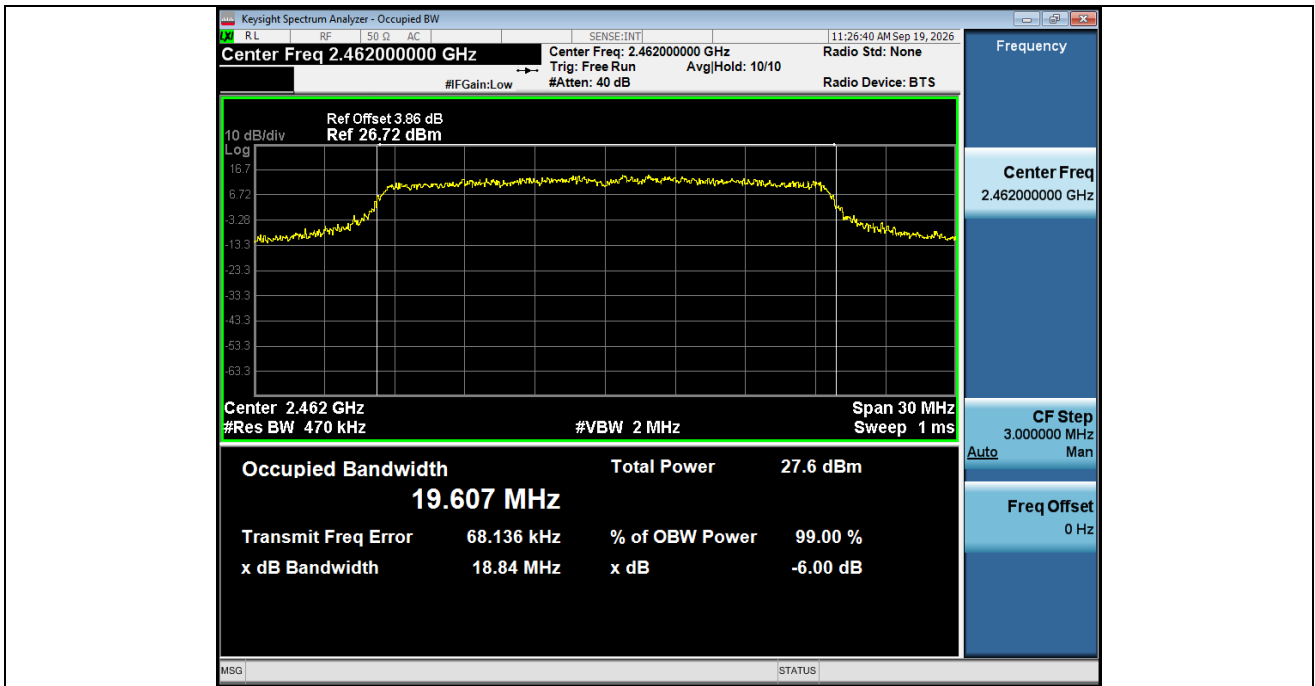


-6dB_Bandwidth_NVNT_ANT1_802_11n(HT40)_2422

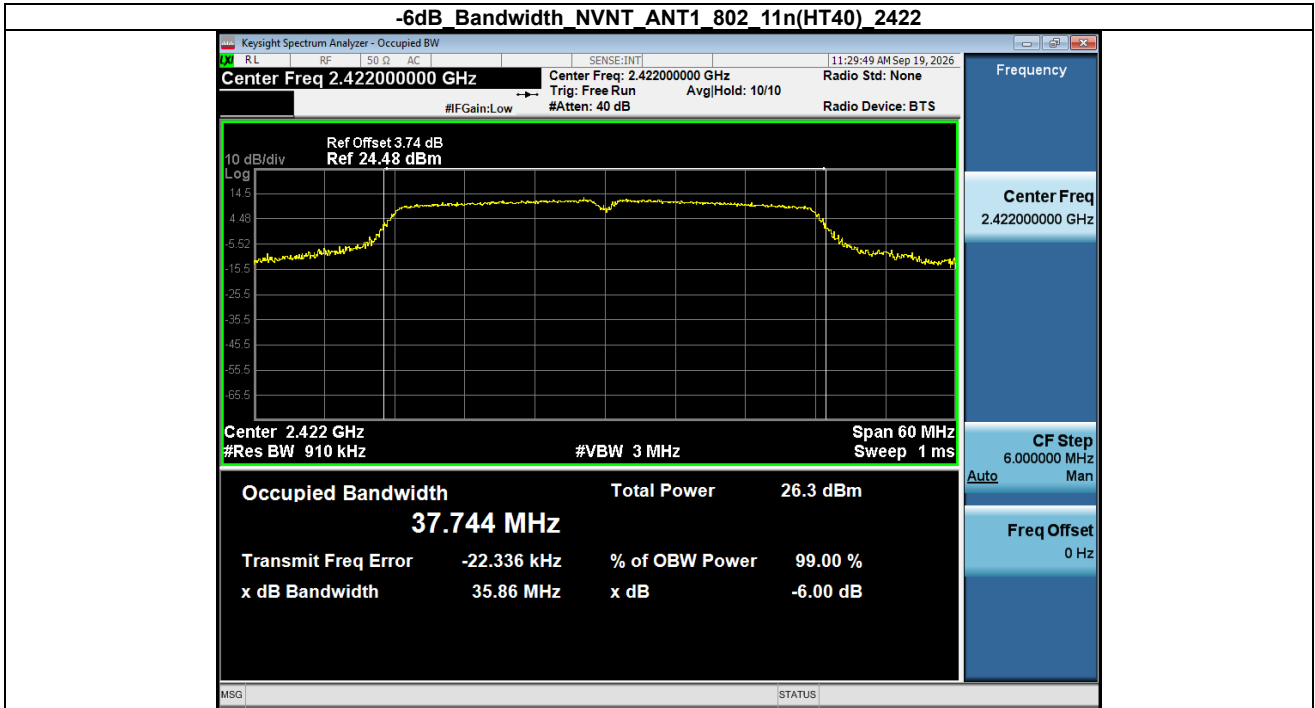


-6dB_Bandwidth_NVNT_ANT1_802_11n(HT40)_2437

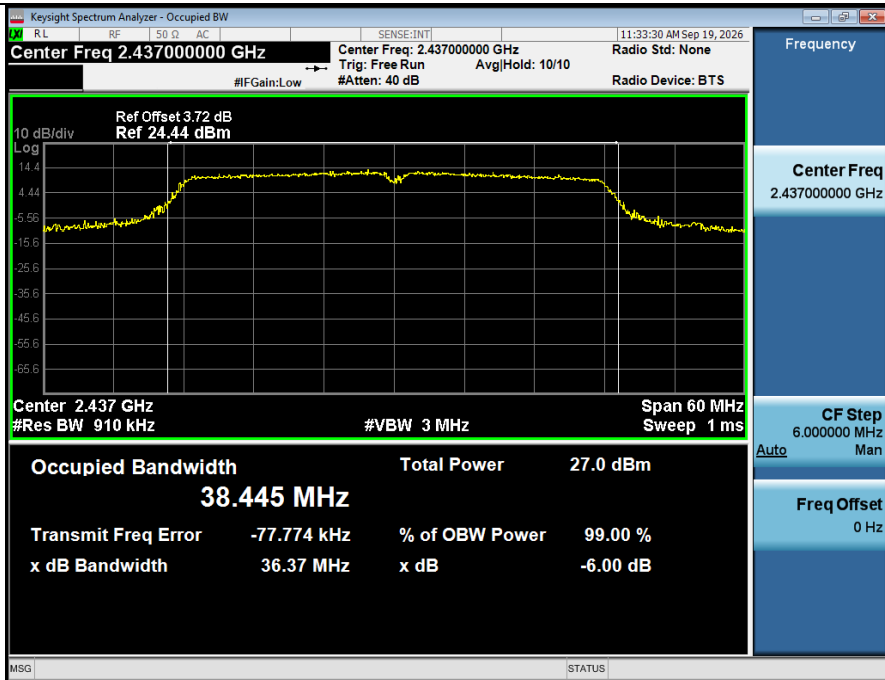


-6dB_Bandwidth_NVNT_ANT1_802_11n(HT40)_2452

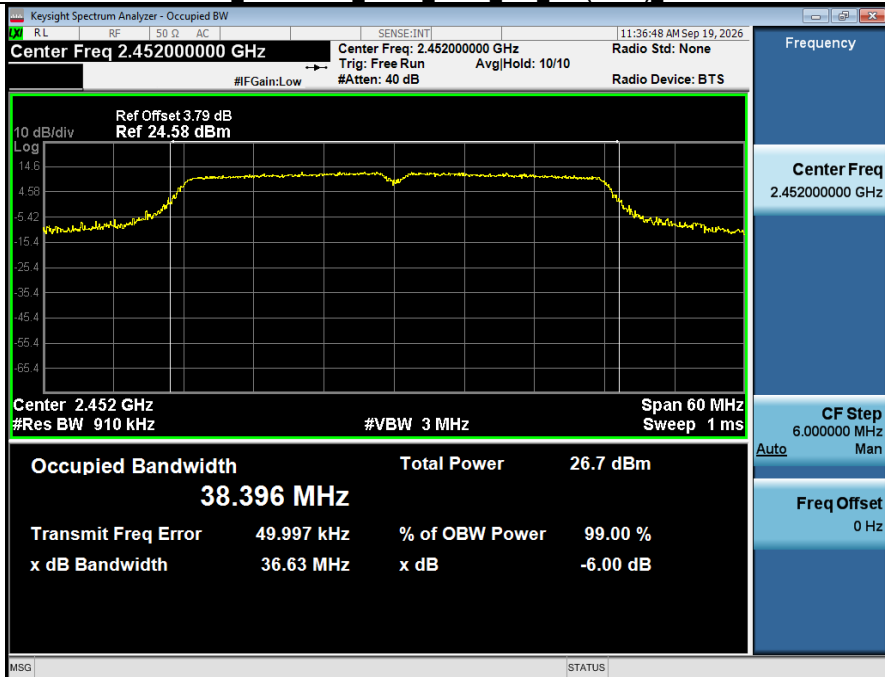


-6dB_Bandwidth_NVNT_ANT1_802_11ax(HE40)_2422

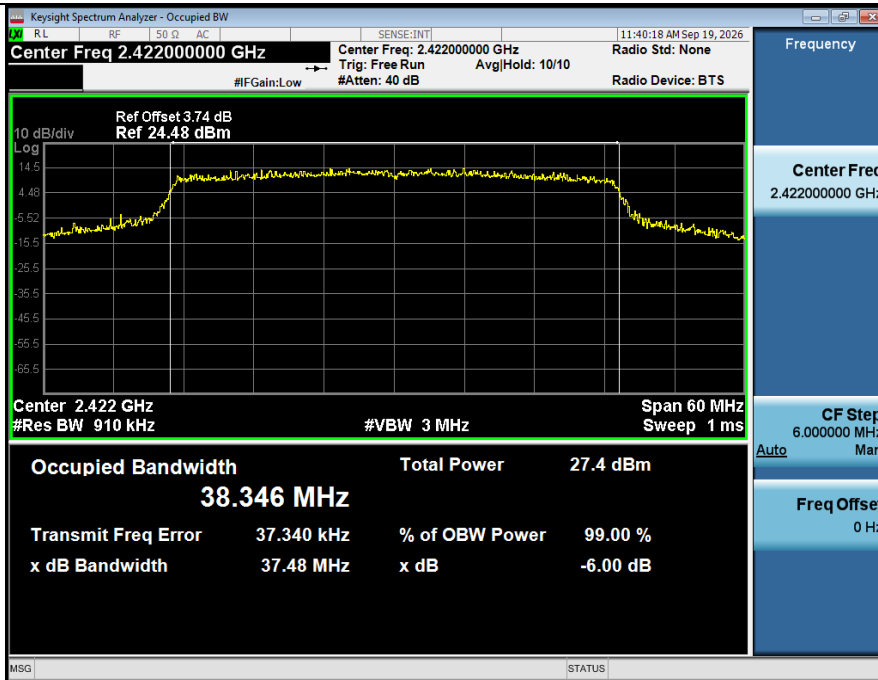

-6dB_Bandwidth_NVNT_ANT1_802_11ax(HE40)_2437

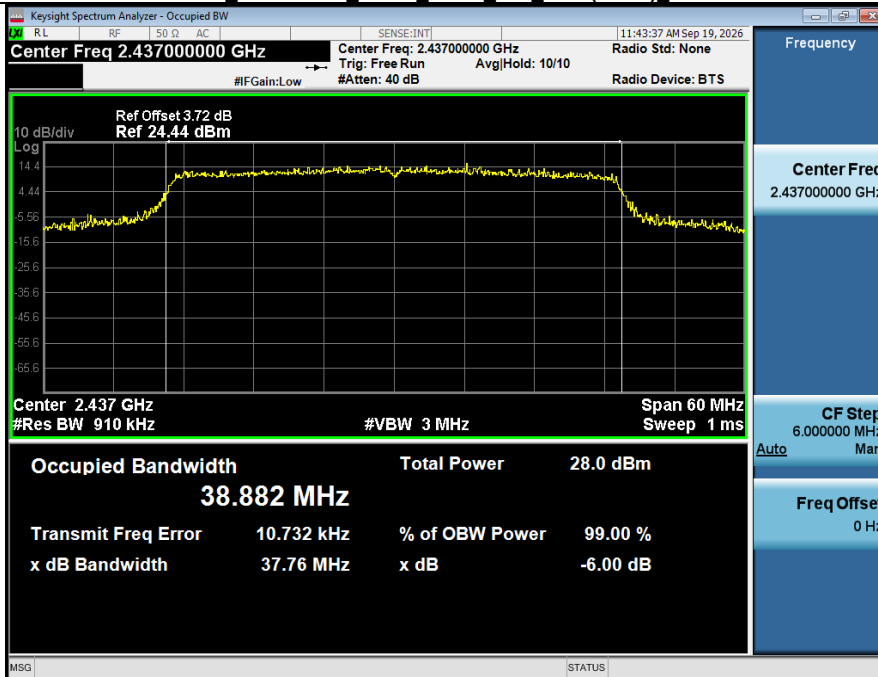


-6dB_Bandwidth_NVNT_ANT1_802_11ax(HE40)_2452

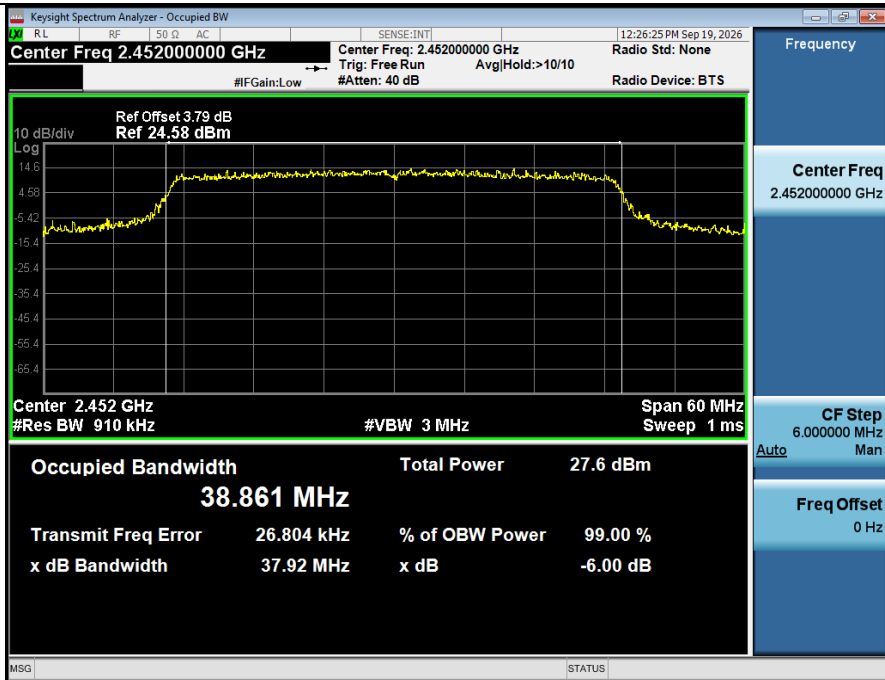


2. 99% Occupied Bandwidth


Condition	Antenna	Modulation	Frequency (MHz)	99% BW (MHz)
NVNT	ANT1	802.11b	2412.00	13.910
NVNT	ANT1	802.11b	2437.00	13.552
NVNT	ANT1	802.11b	2462.00	13.439
NVNT	ANT1	802.11g	2412.00	18.984
NVNT	ANT1	802.11g	2437.00	20.155
NVNT	ANT1	802.11g	2462.00	19.929
NVNT	ANT1	802.11n(HT20)	2412.00	19.582
NVNT	ANT1	802.11n(HT20)	2437.00	20.927
NVNT	ANT1	802.11n(HT20)	2462.00	20.746
NVNT	ANT1	802.11ax(HE20)	2412.00	19.641
NVNT	ANT1	802.11ax(HE20)	2437.00	20.412
NVNT	ANT1	802.11ax(HE20)	2462.00	20.278
NVNT	ANT1	802.11n(HT40)	2422.00	37.963
NVNT	ANT1	802.11n(HT40)	2437.00	39.007
NVNT	ANT1	802.11n(HT40)	2452.00	39.022
NVNT	ANT1	802.11ax(HE40)	2422.00	39.173
NVNT	ANT1	802.11ax(HE40)	2437.00	39.693
NVNT	ANT1	802.11ax(HE40)	2452.00	39.837

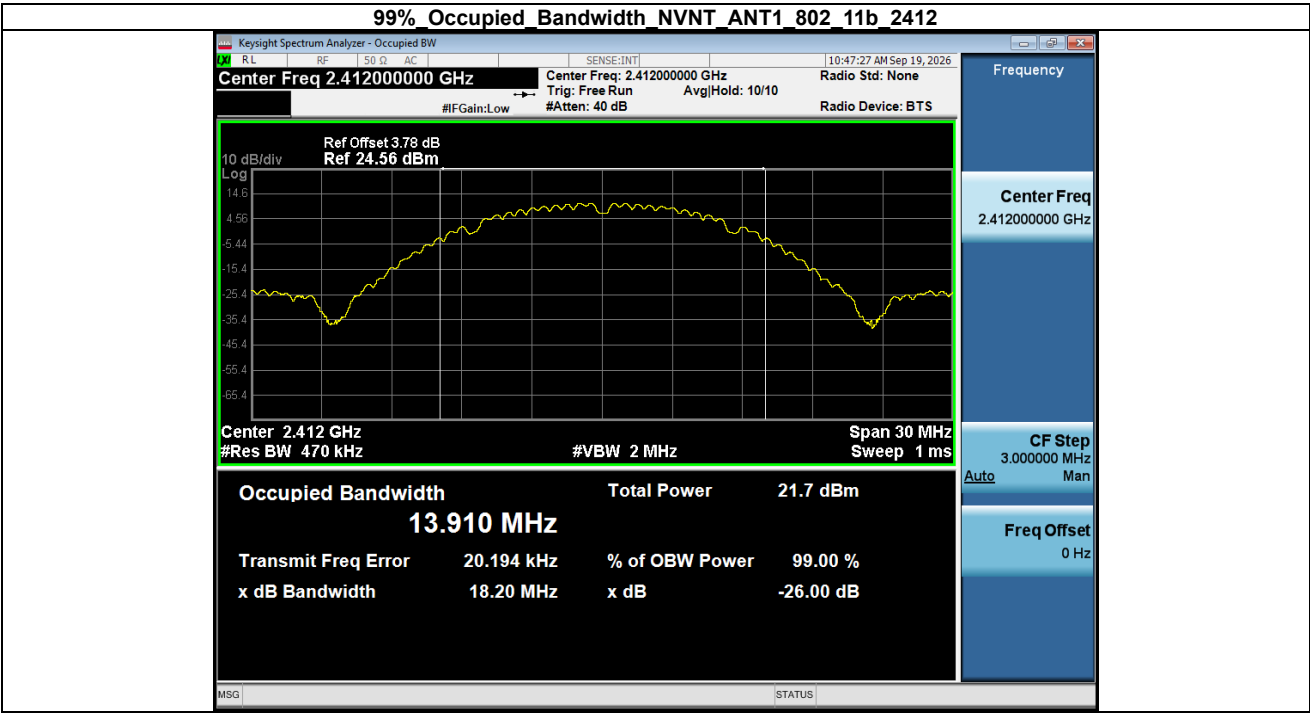


99%_Occupied_Bandwidth_NVNT_ANT1_802_11b_2437

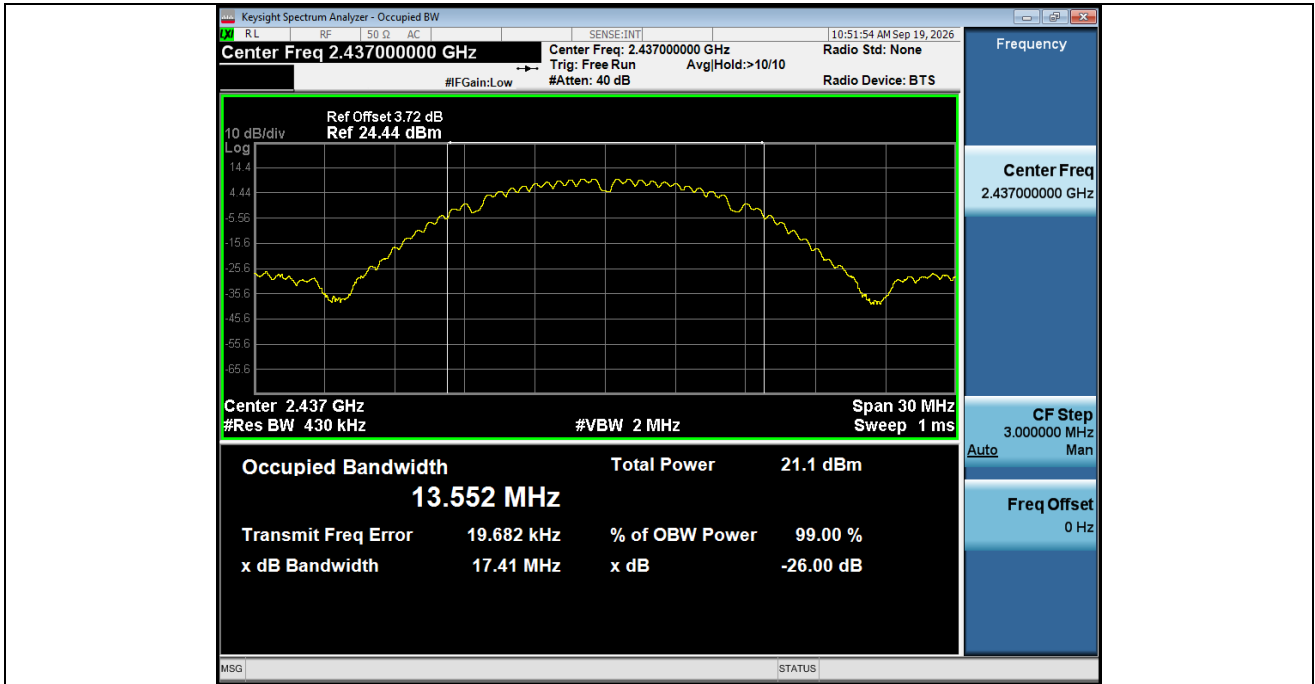


99% Occupied Bandwidth NVNT ANT1 802 11b 2462

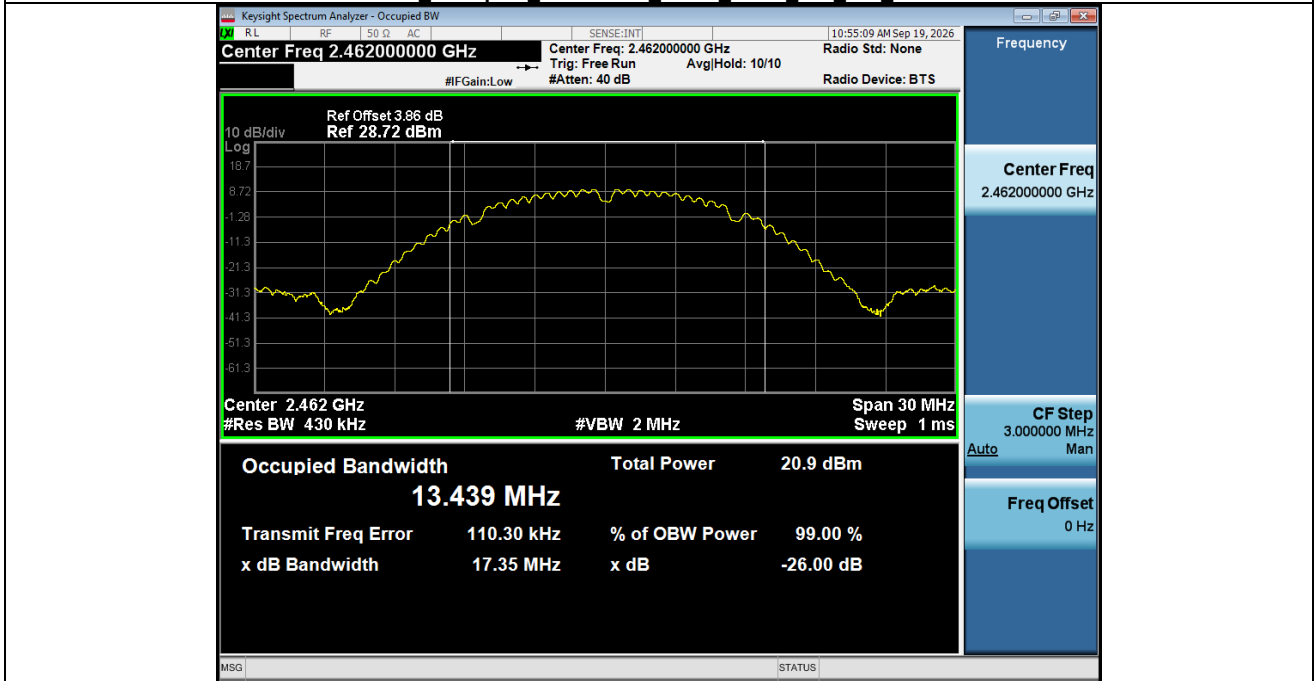



99% Occupied Bandwidth NVNT ANT1 802 11g 2412

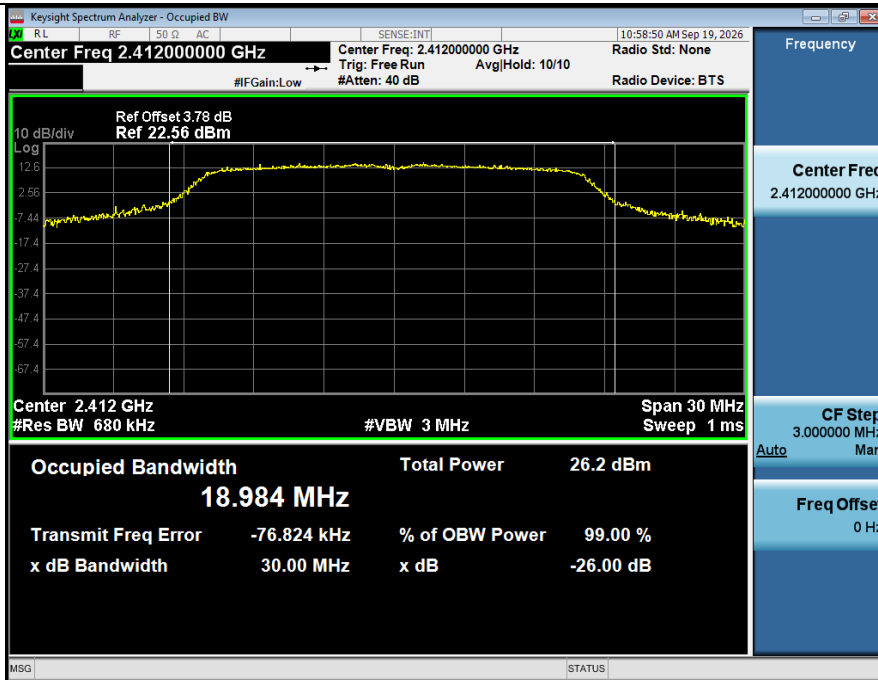



99% Occupied Bandwidth NVNT ANT1 802_11g_2437

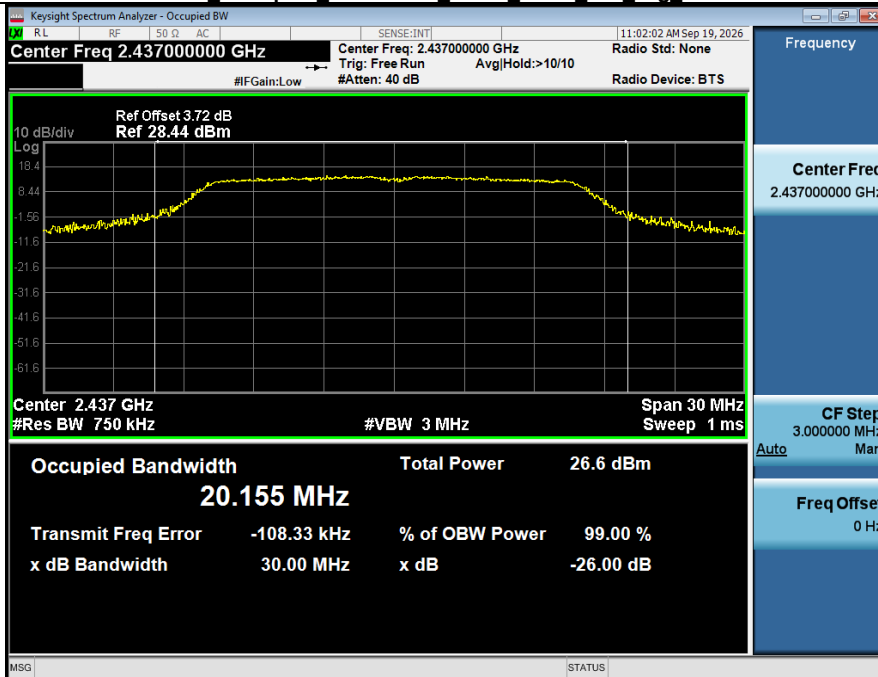


99% Occupied Bandwidth NVNT ANT1 802_11g_2462

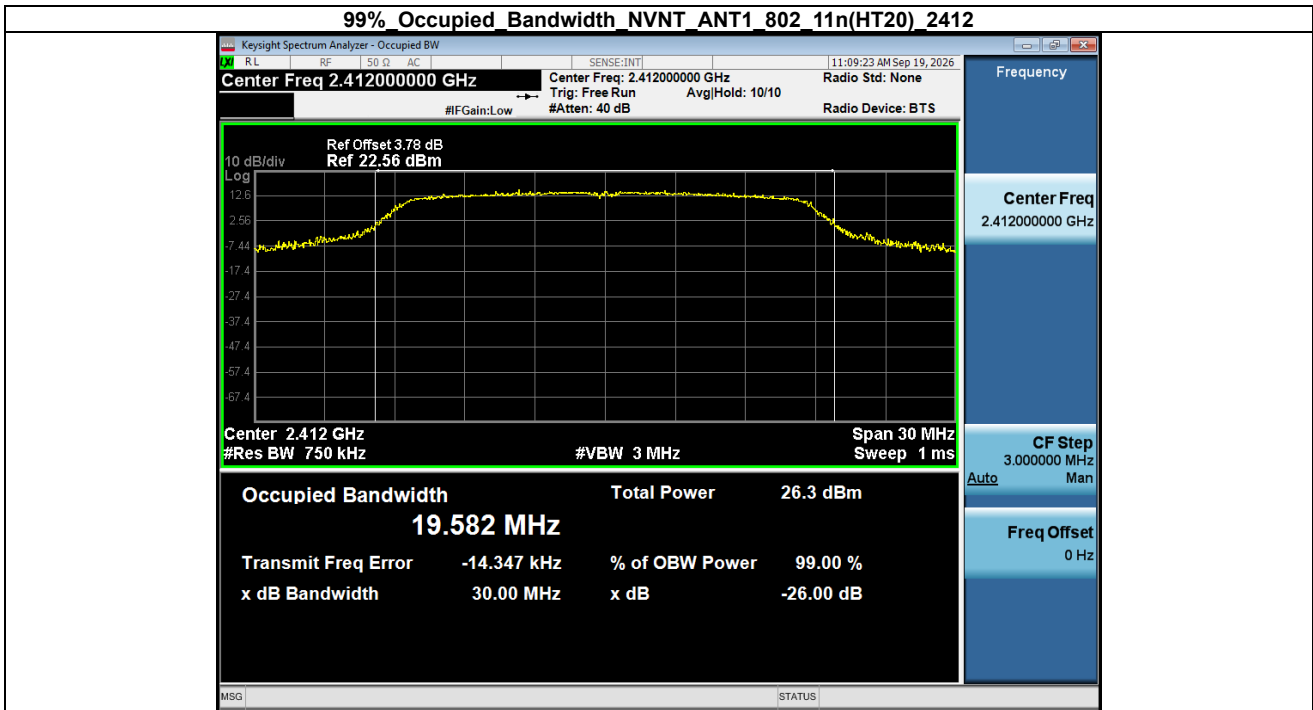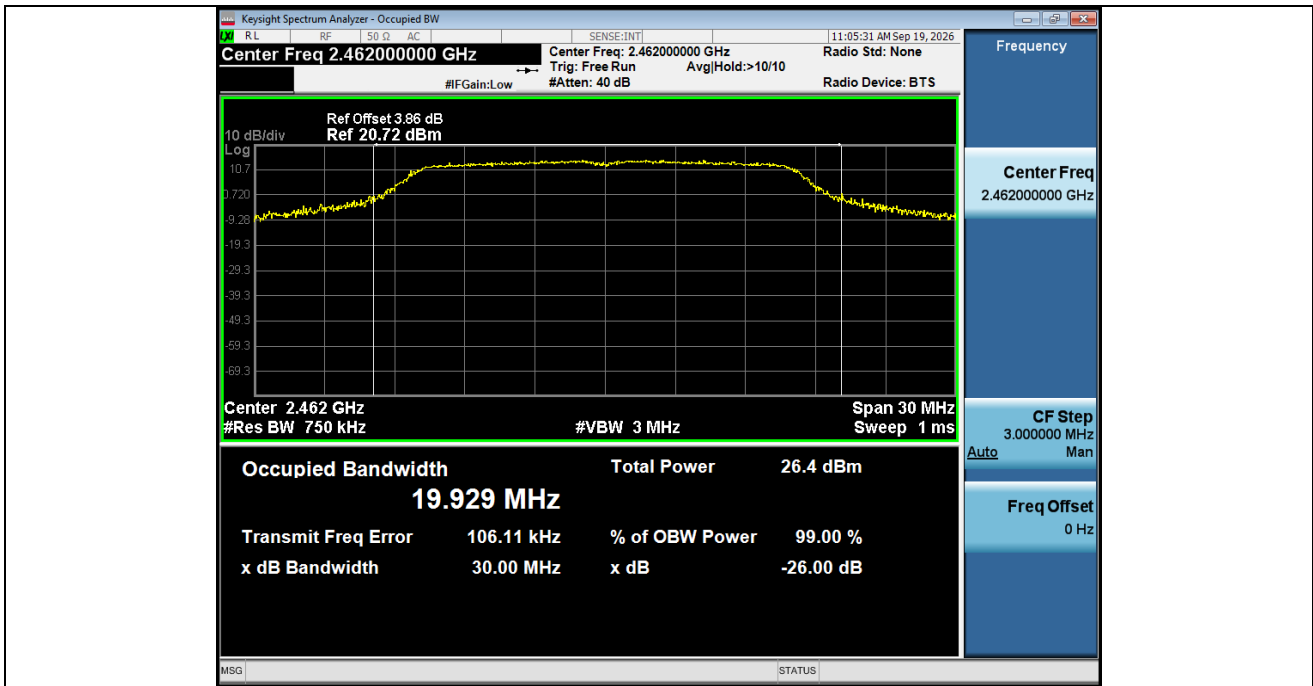


99%_Occupied_Bandwidth_NVNT_ANT1_802_11n(HT20)_2437

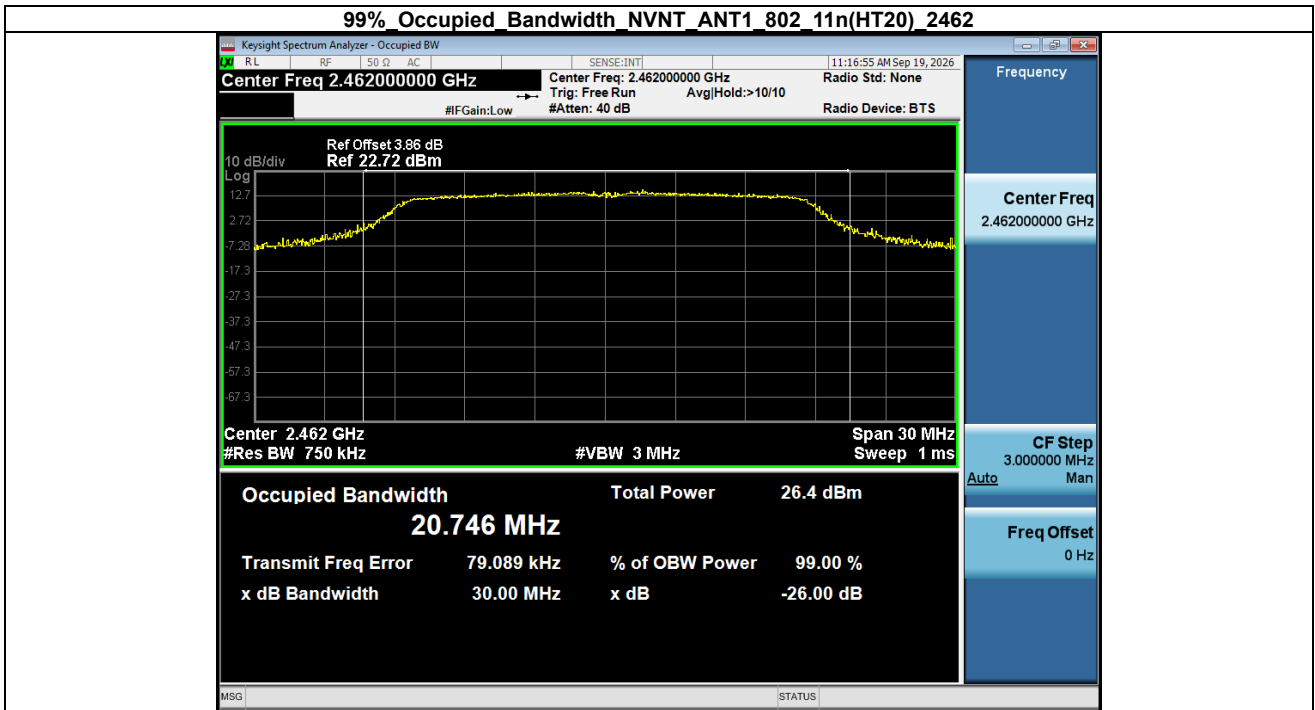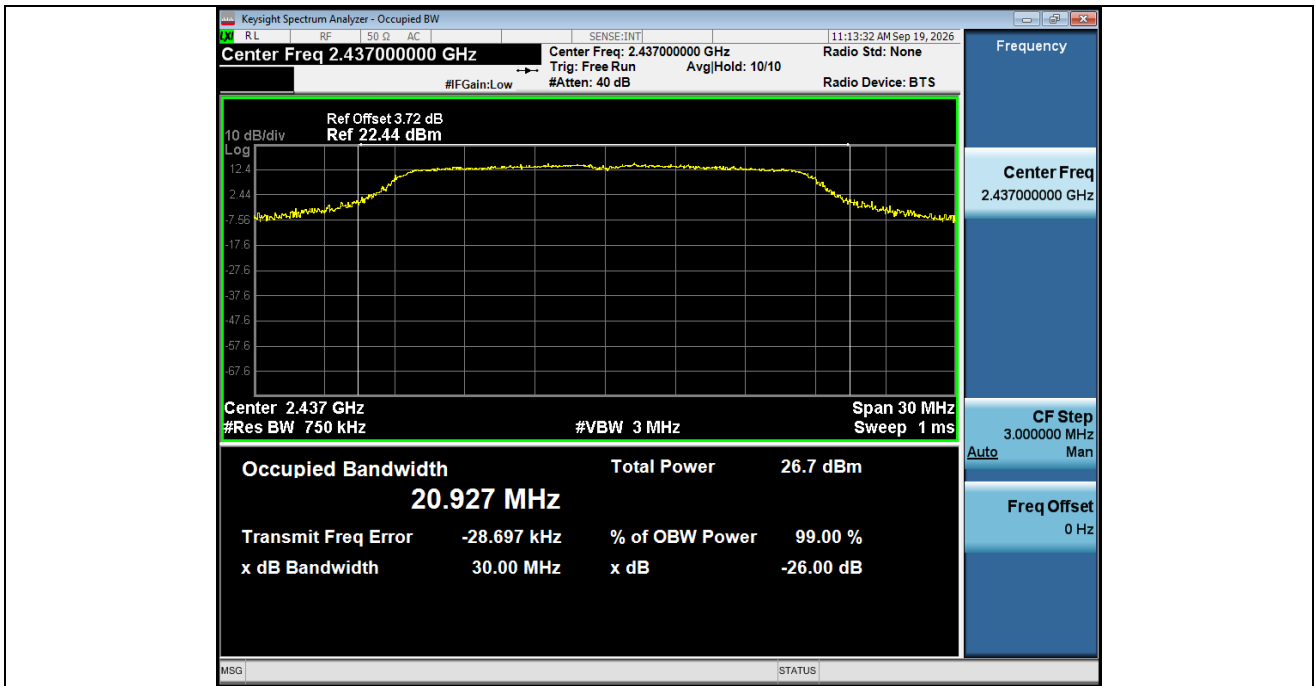


99% Occupied Bandwidth NVNT_ANT1_802_11ax(HE20)_2412

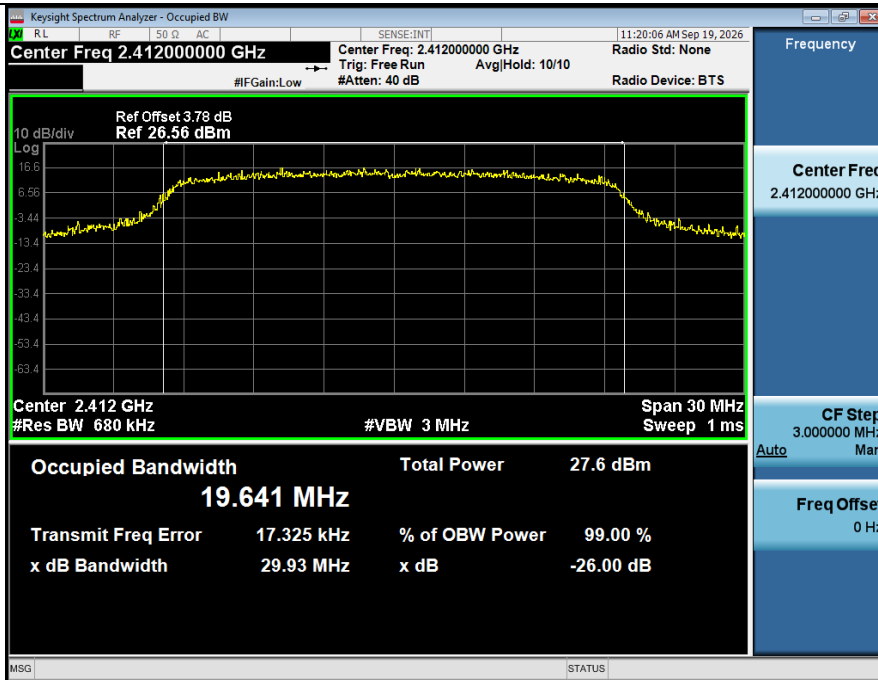


99% Occupied Bandwidth NVNT_ANT1_802_11ax(HE20)_2437

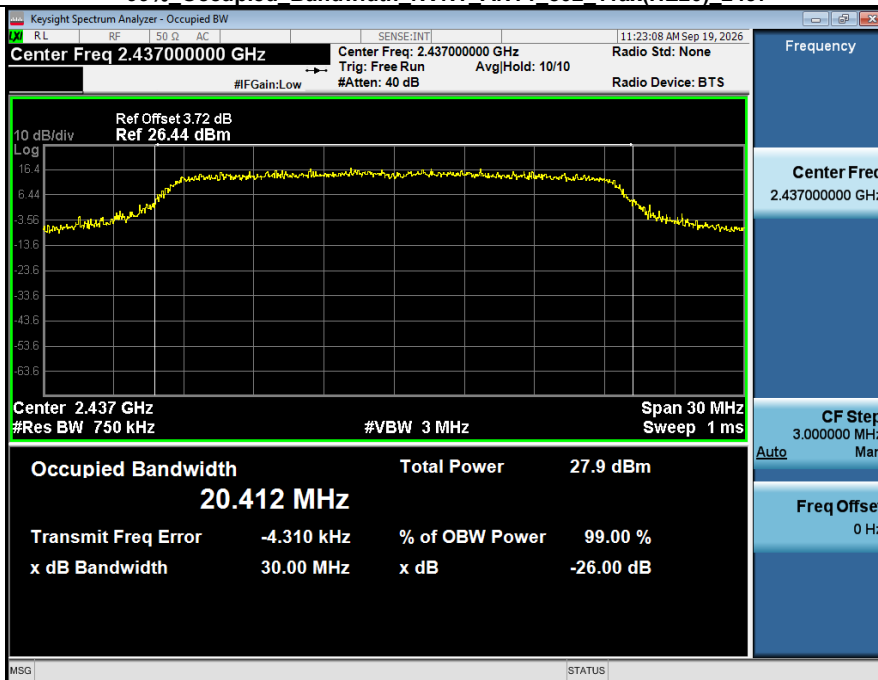



99% Occupied Bandwidth NVNT_ANT1_802_11ax(HE20)_2462

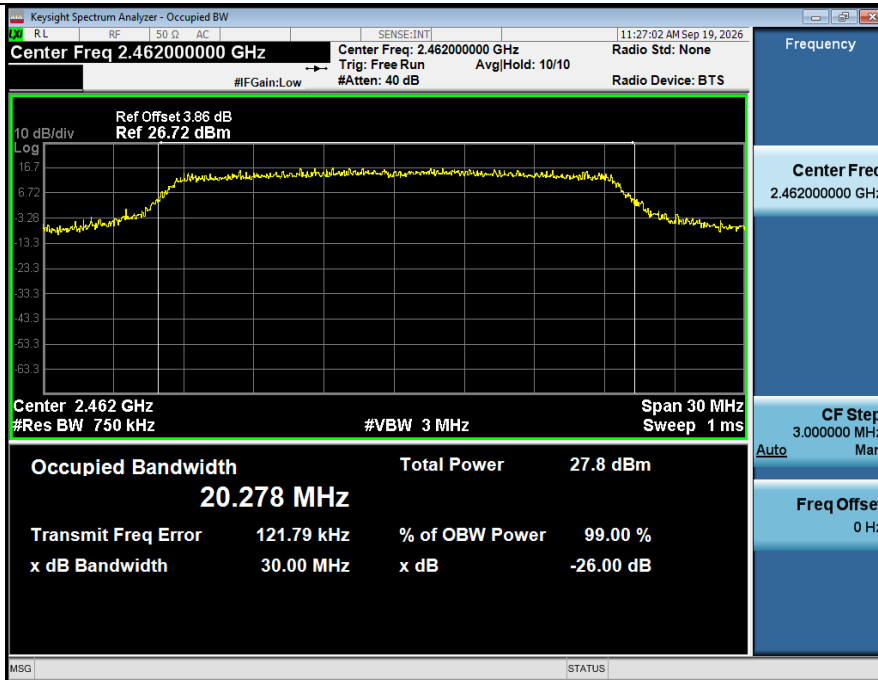


99% Occupied Bandwidth NVNT_ANT1_802_11n(HT40)_2422

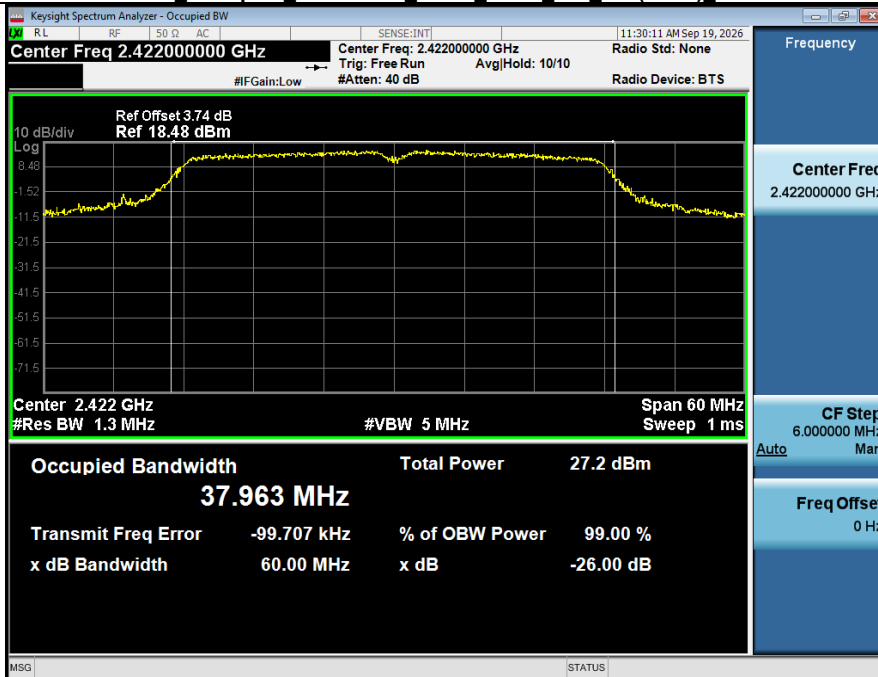


99%_Occupied_Bandwidth_NVNT_ANT1_802_11n(HT40)_2437

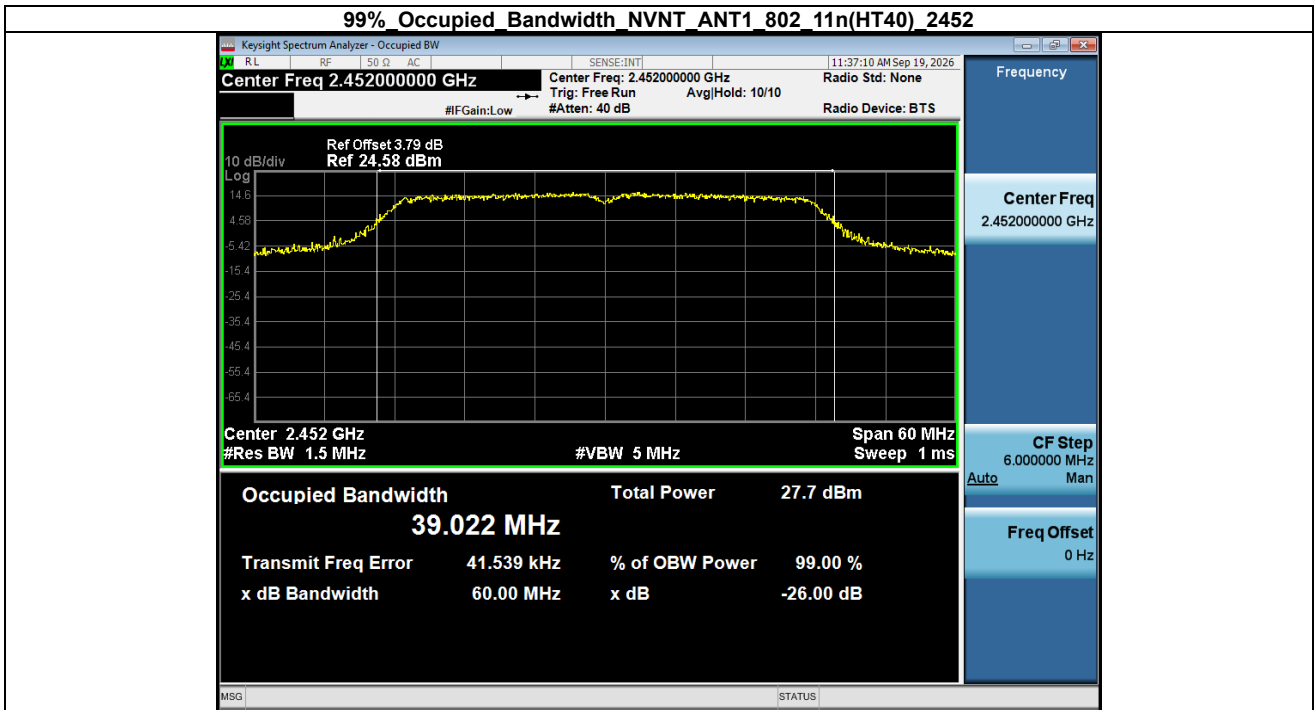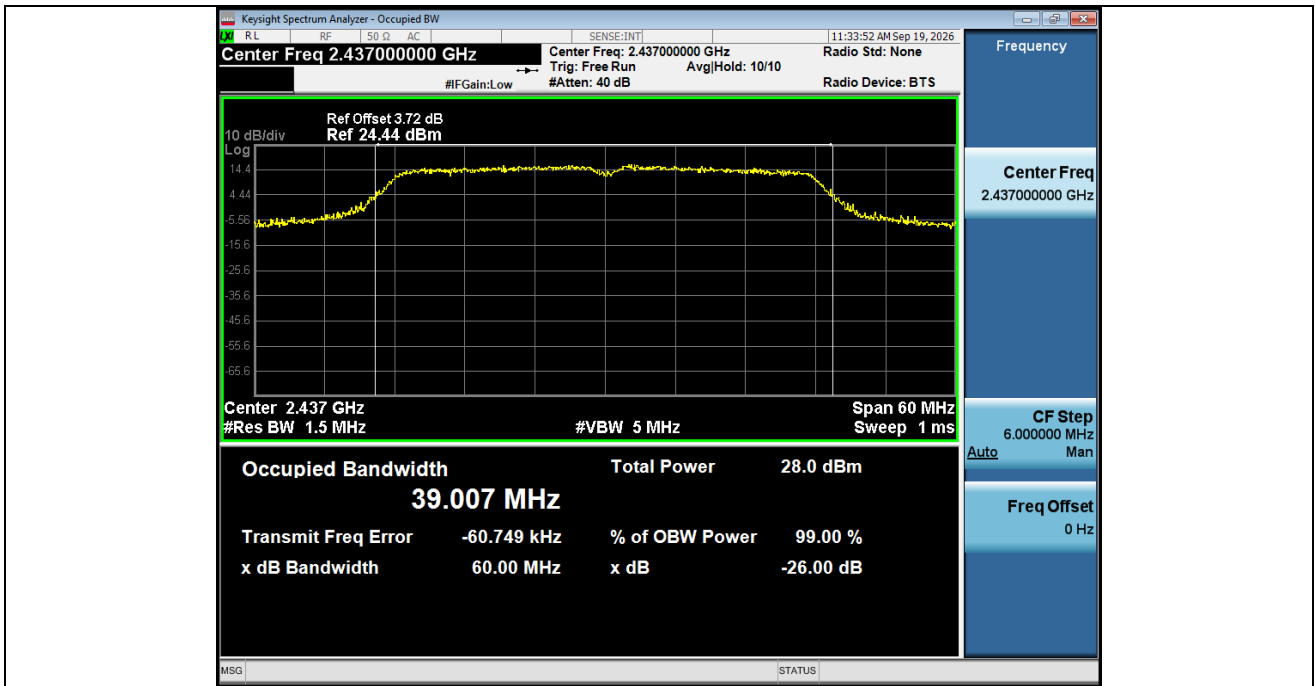


99% Occupied Bandwidth NVNT_ANT1_802_11ax(HE40)_2422

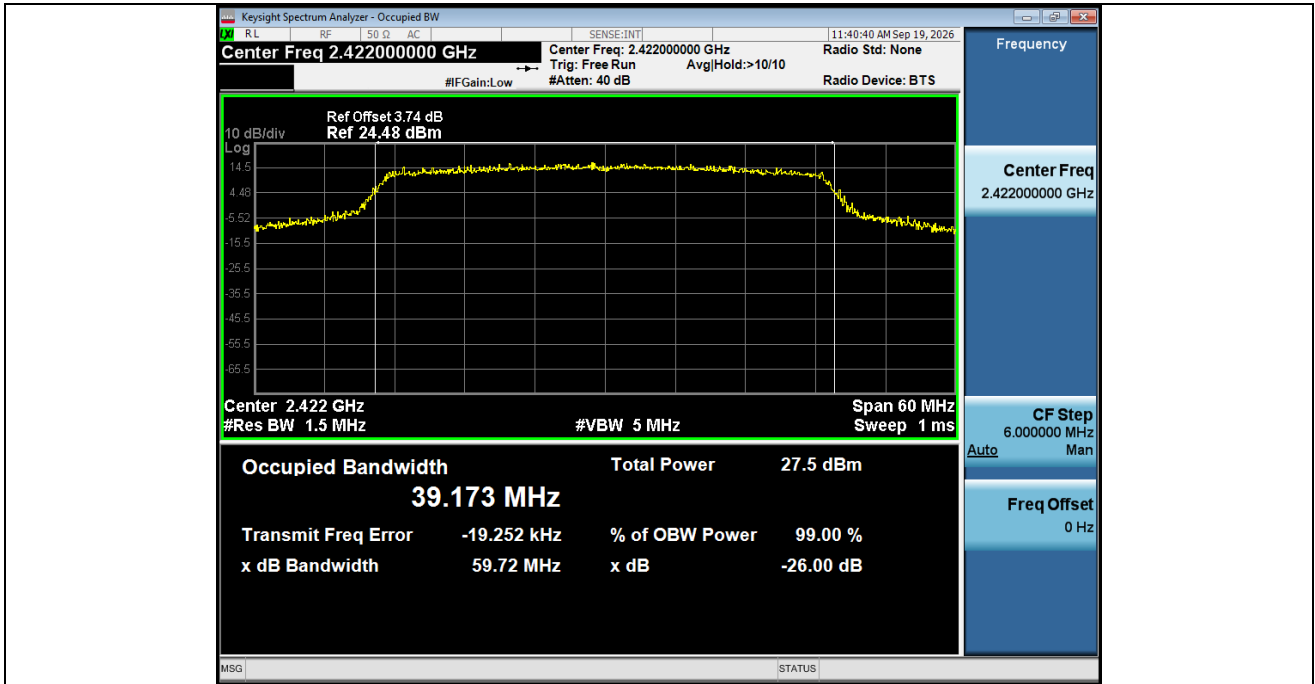

99% Occupied Bandwidth NVNT_ANT1_802_11ax(HE40)_2437

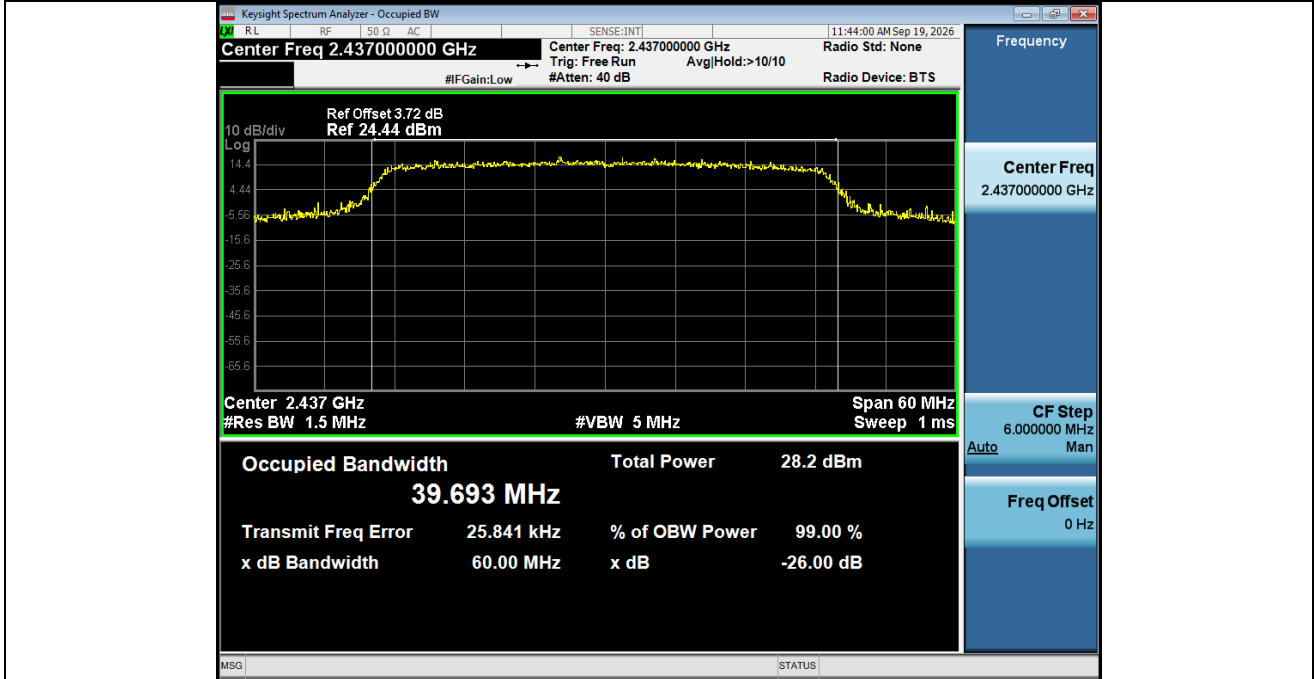


99% Occupied Bandwidth NVNT_ANT1_802_11ax(HE40)_2452

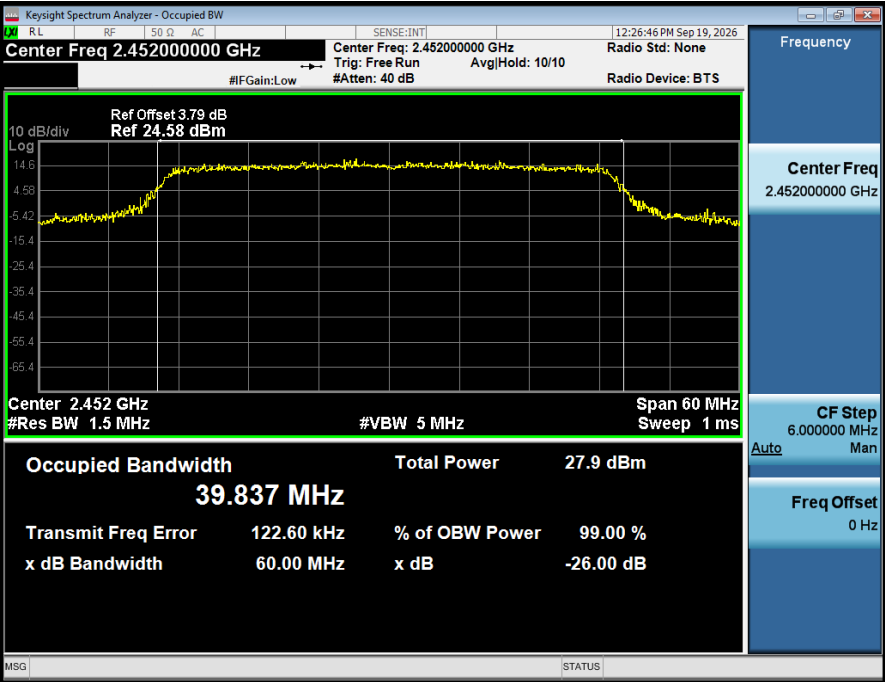


3. Duty Cycle


Condition	Antenna	Modulation	Frequency (MHz)	Duty cycle(%)	Duty factor(dB)
NVNT	ANT1	802.11b	2412.00	92.73	0.33
NVNT	ANT1	802.11b	2437.00	92.76	0.33
NVNT	ANT1	802.11b	2462.00	92.73	0.33
NVNT	ANT1	802.11g	2412.00	68.63	1.64
NVNT	ANT1	802.11g	2437.00	66.67	1.76
NVNT	ANT1	802.11g	2462.00	66.67	1.76
NVNT	ANT1	802.11n(HT20)	2412.00	67.35	1.72
NVNT	ANT1	802.11n(HT20)	2437.00	67.35	1.72
NVNT	ANT1	802.11n(HT20)	2462.00	65.31	1.85
NVNT	ANT1	802.11ax(HE20)	2412.00	57.14	2.43
NVNT	ANT1	802.11ax(HE20)	2437.00	61.90	2.08
NVNT	ANT1	802.11ax(HE20)	2462.00	59.68	2.24
NVNT	ANT1	802.11n(HT40)	2422.00	51.52	2.88
NVNT	ANT1	802.11n(HT40)	2437.00	51.52	2.88
NVNT	ANT1	802.11n(HT40)	2452.00	45.45	3.42
NVNT	ANT1	802.11ax(HE40)	2422.00	46.67	3.31
NVNT	ANT1	802.11ax(HE40)	2437.00	43.33	3.63
NVNT	ANT1	802.11ax(HE40)	2452.00	43.33	3.63

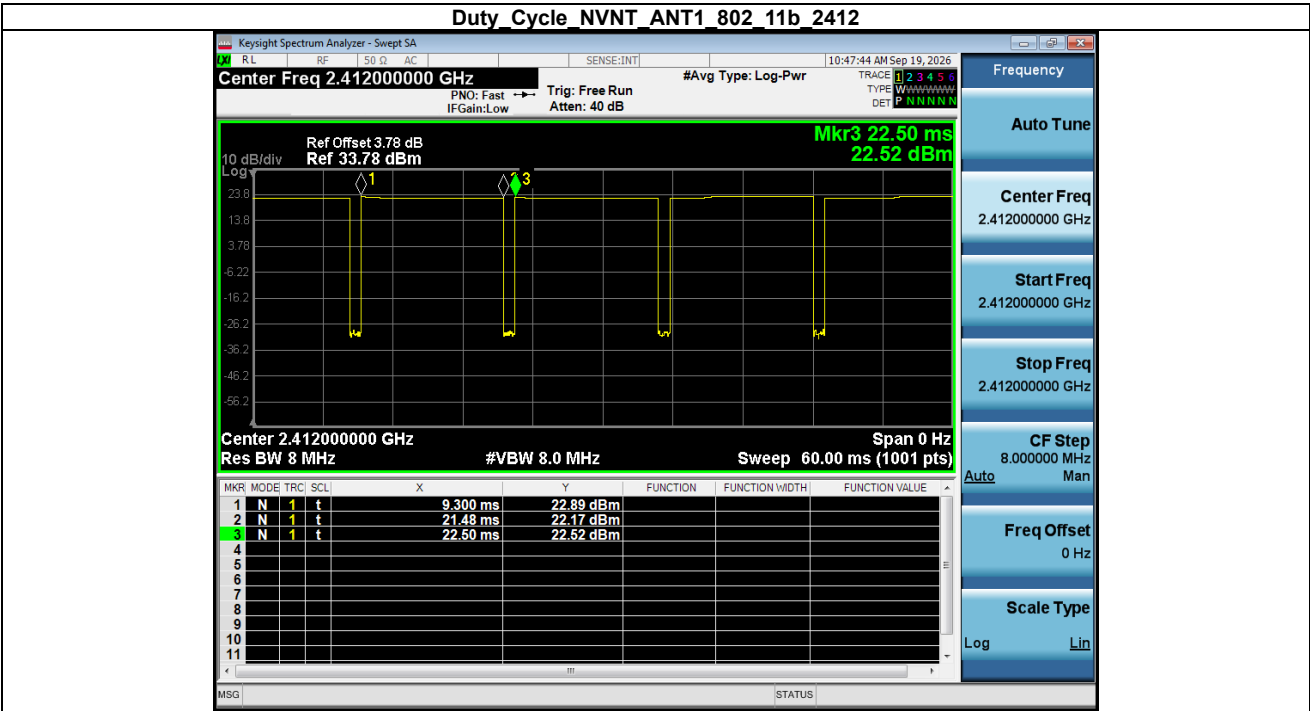


Duty Cycle NVNT ANT1 802_11b 2437

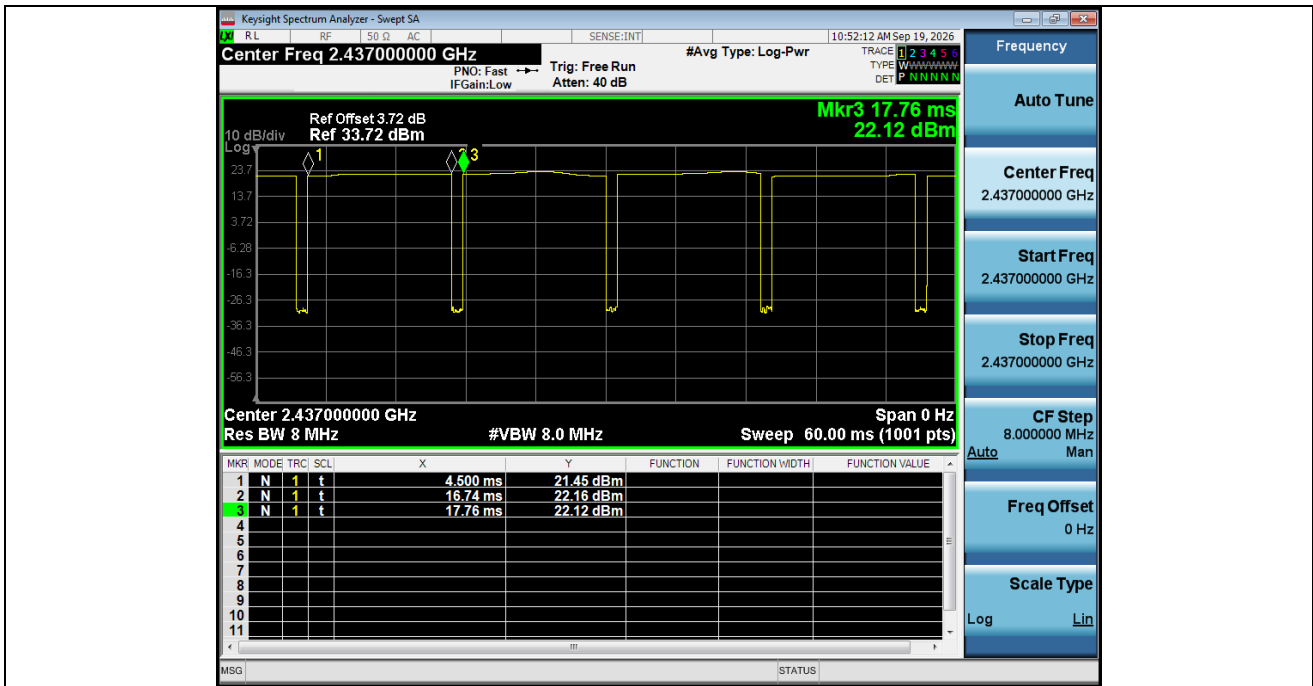


Duty Cycle NVNT ANT1 802_11b_2462

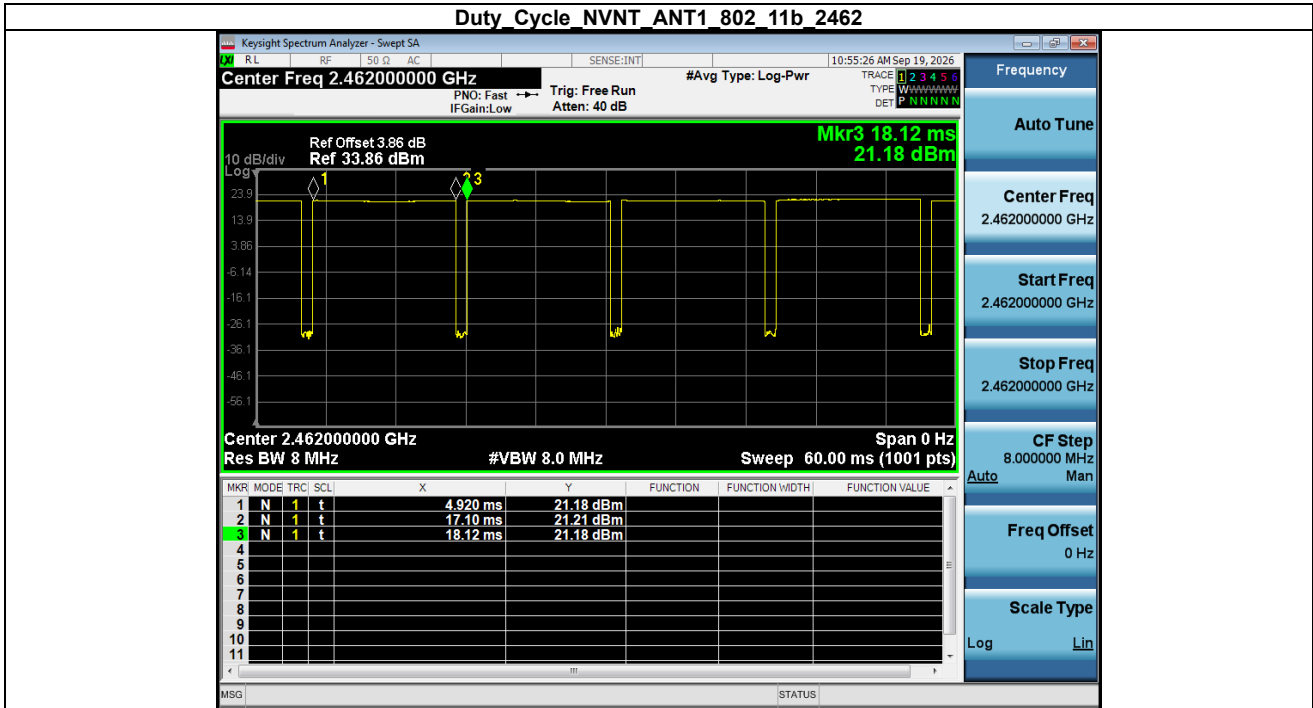


Duty Cycle NVNT ANT1 802_11g_2412

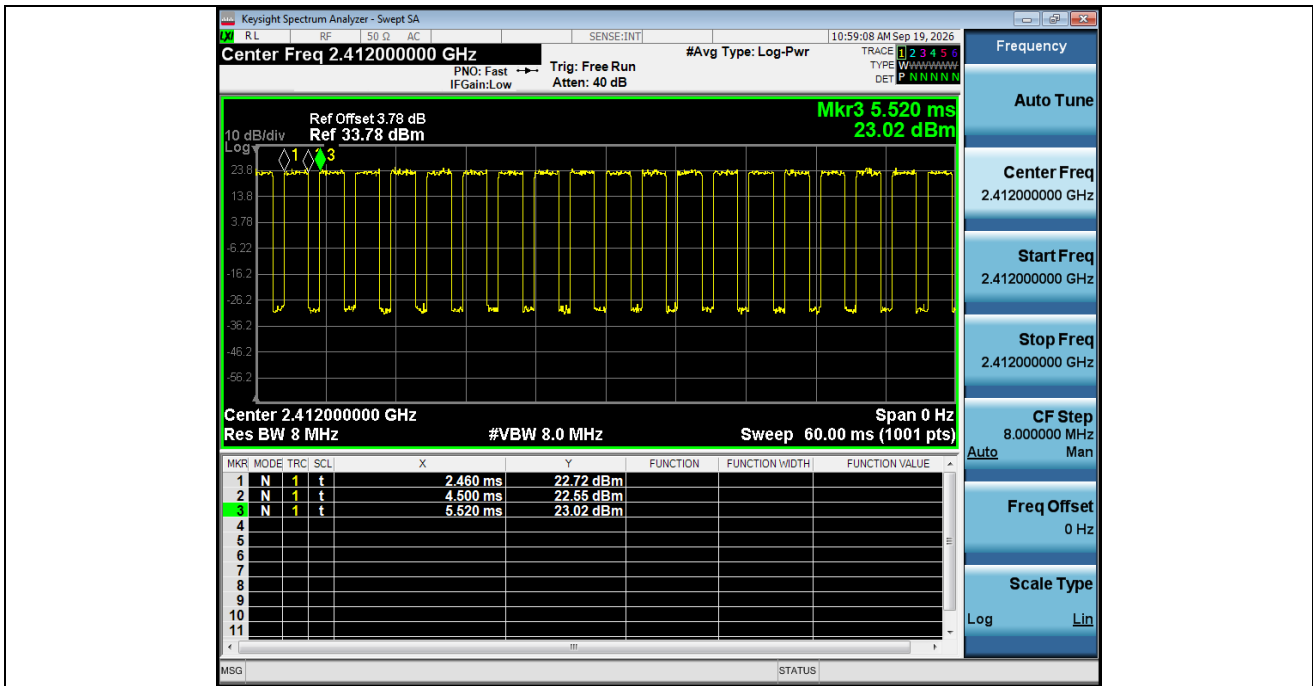


Duty Cycle NVNT ANT1 802_11g_2437

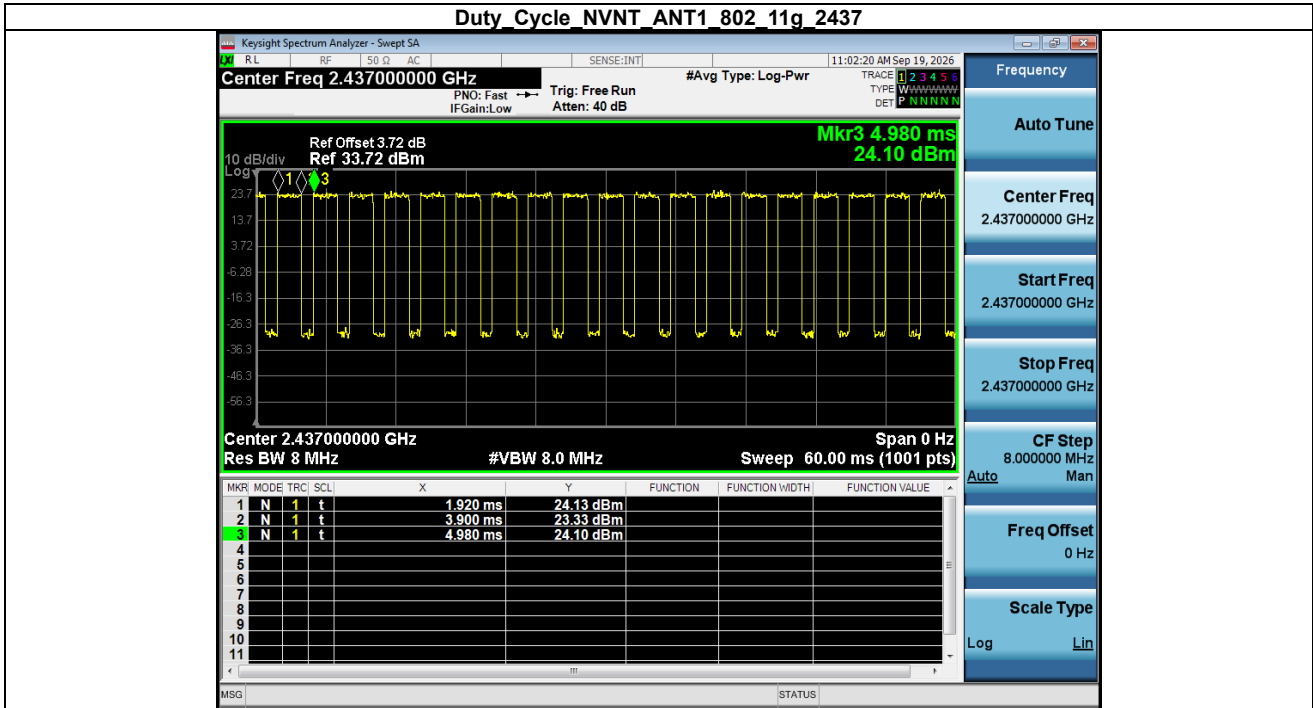


Duty Cycle NVNT ANT1 802_11g_2462

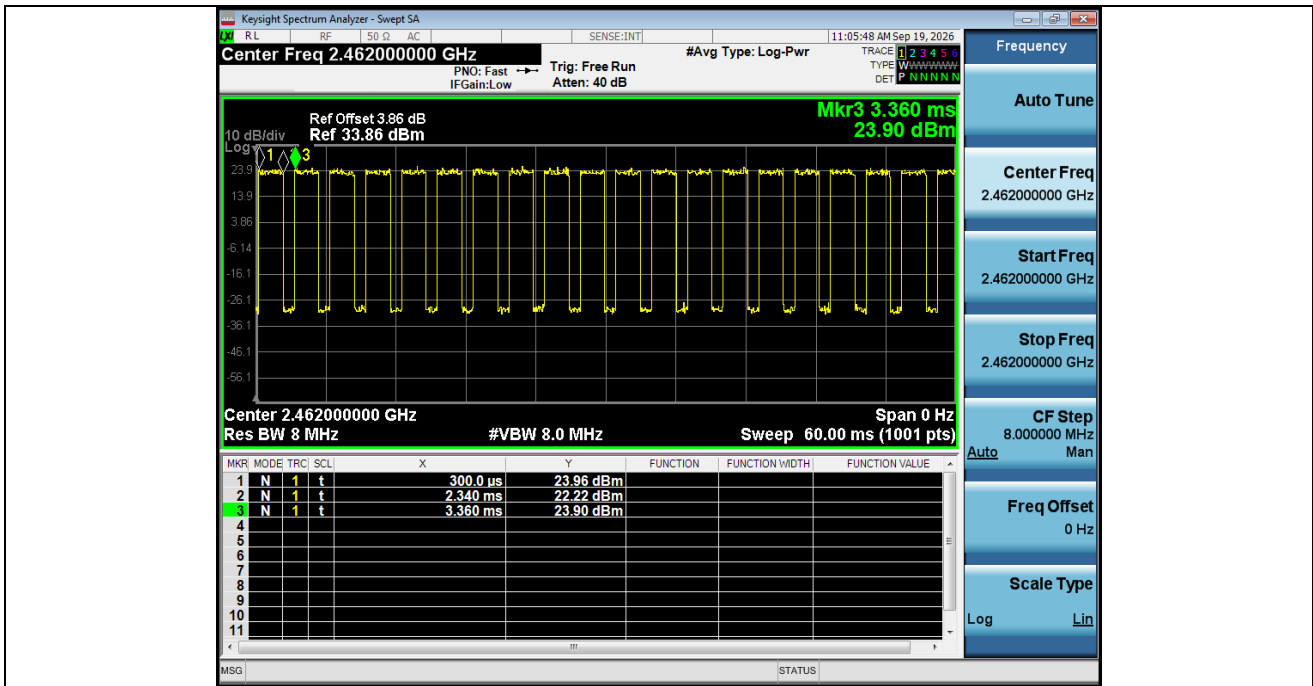


Duty Cycle NVNT ANT1 802 11n(HT20) 2412

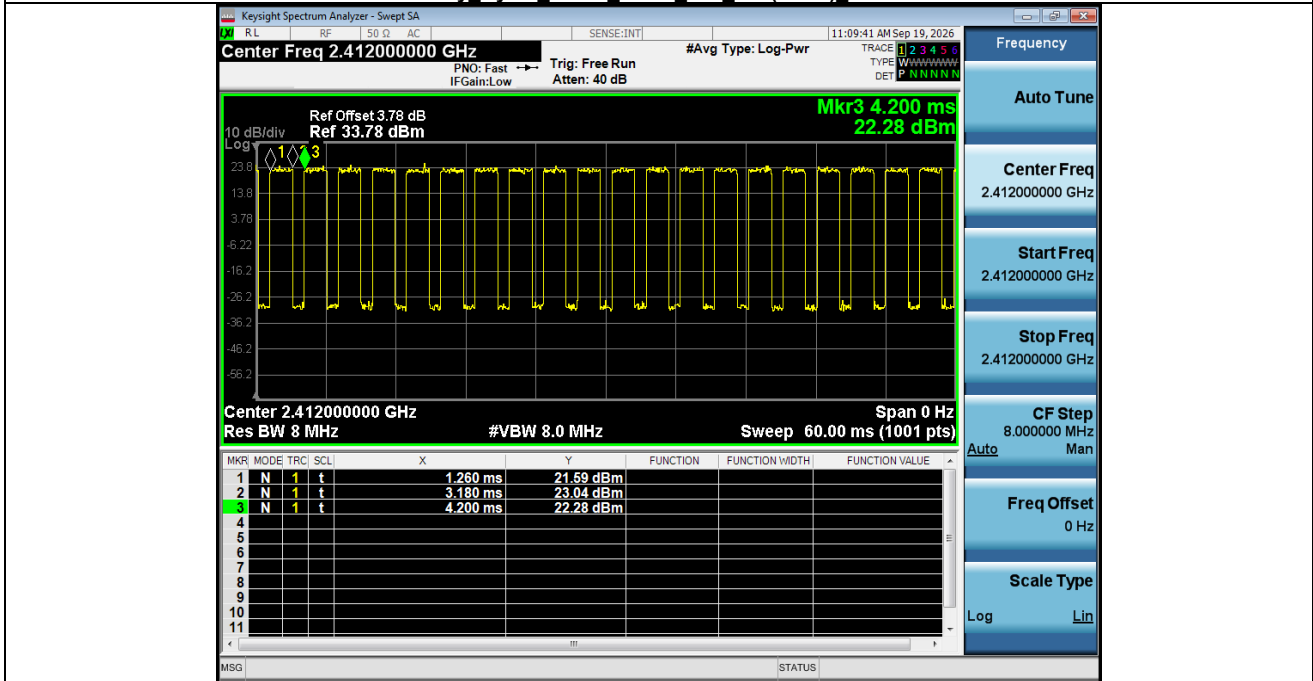



Duty Cycle NVNT ANT1 802 11n(HT20) 2437

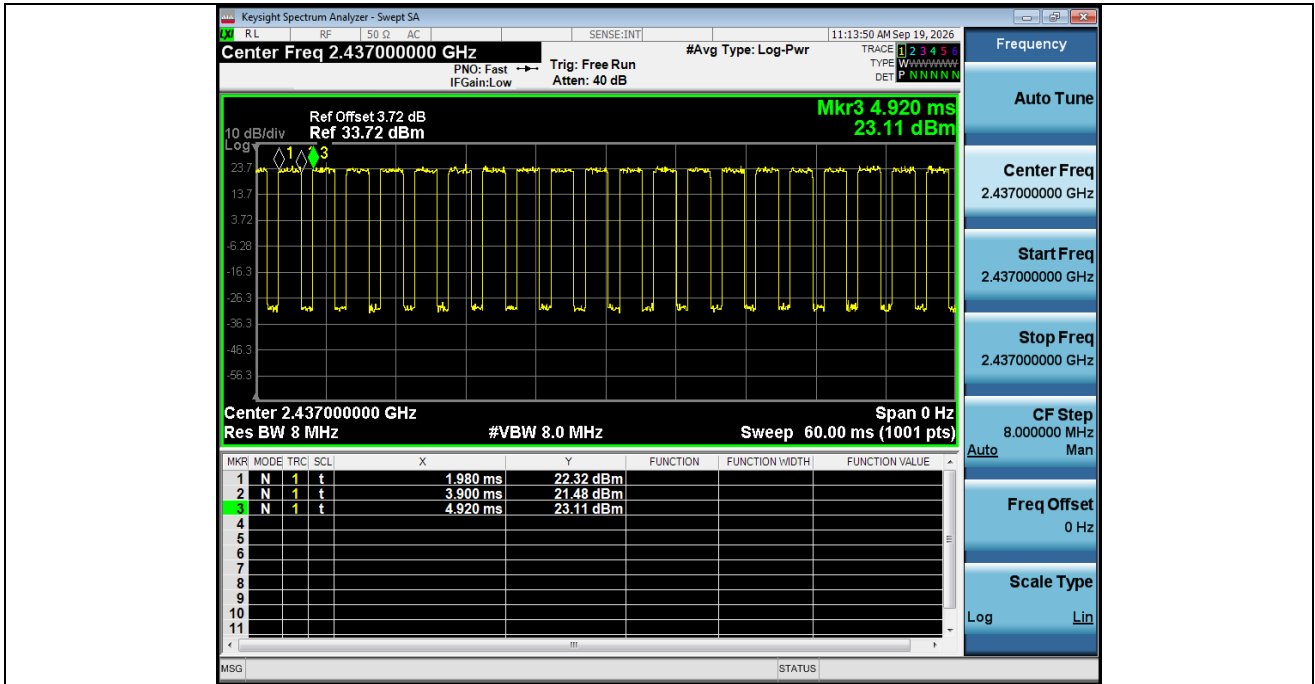


Duty Cycle NVNT ANT1 802 11n(HT20) 2462

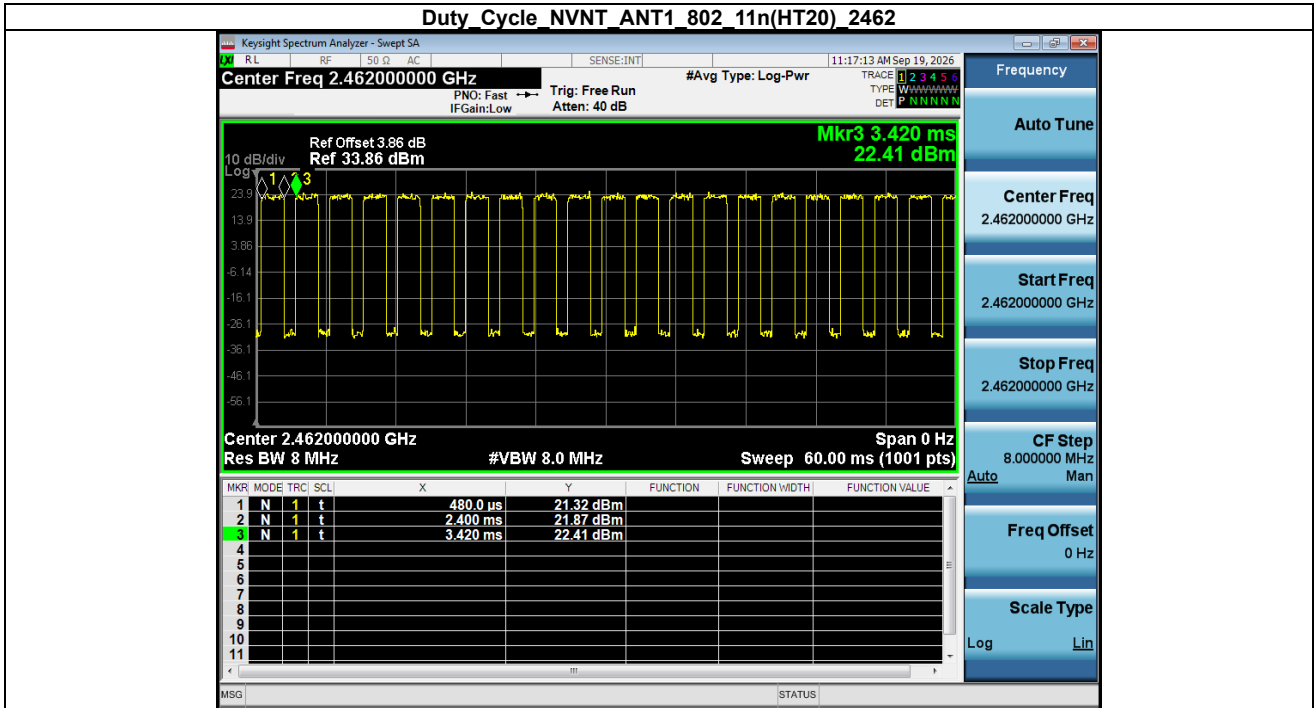


Duty Cycle NVNT ANT1 802 11ax(HE20) 2412

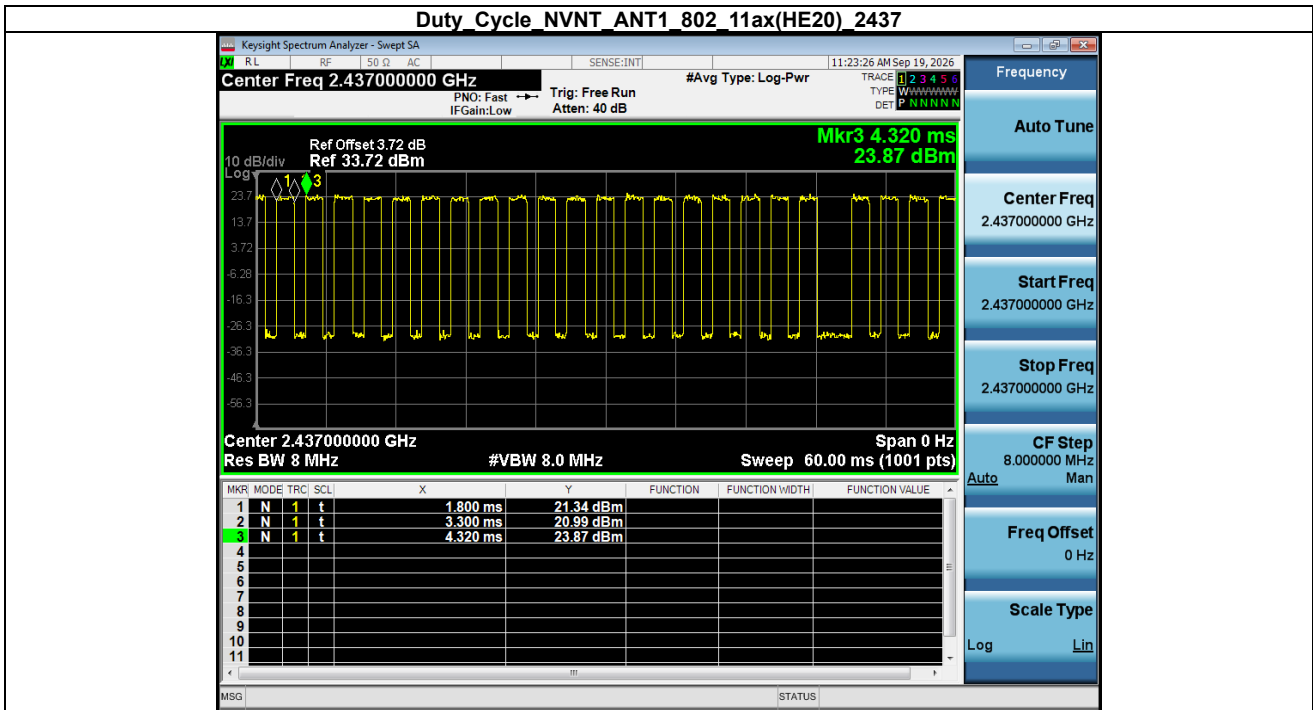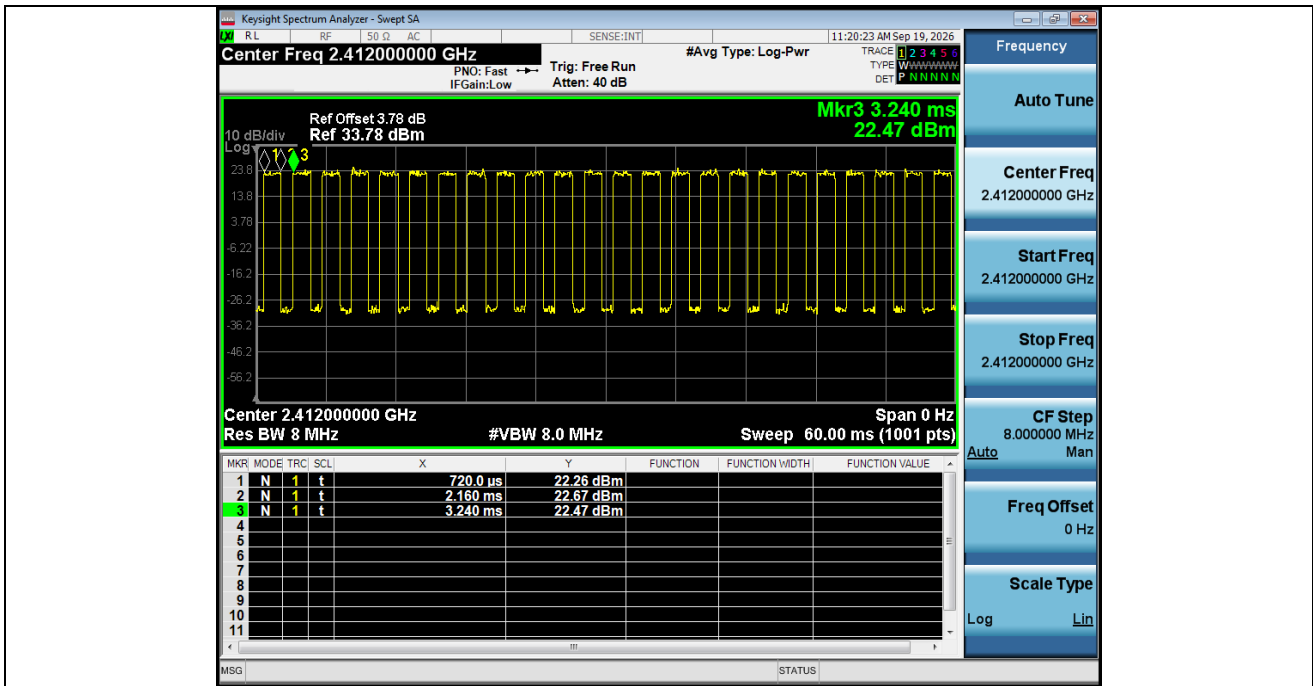


Duty Cycle NVNT ANT1 802 11ax(HE20) 2462

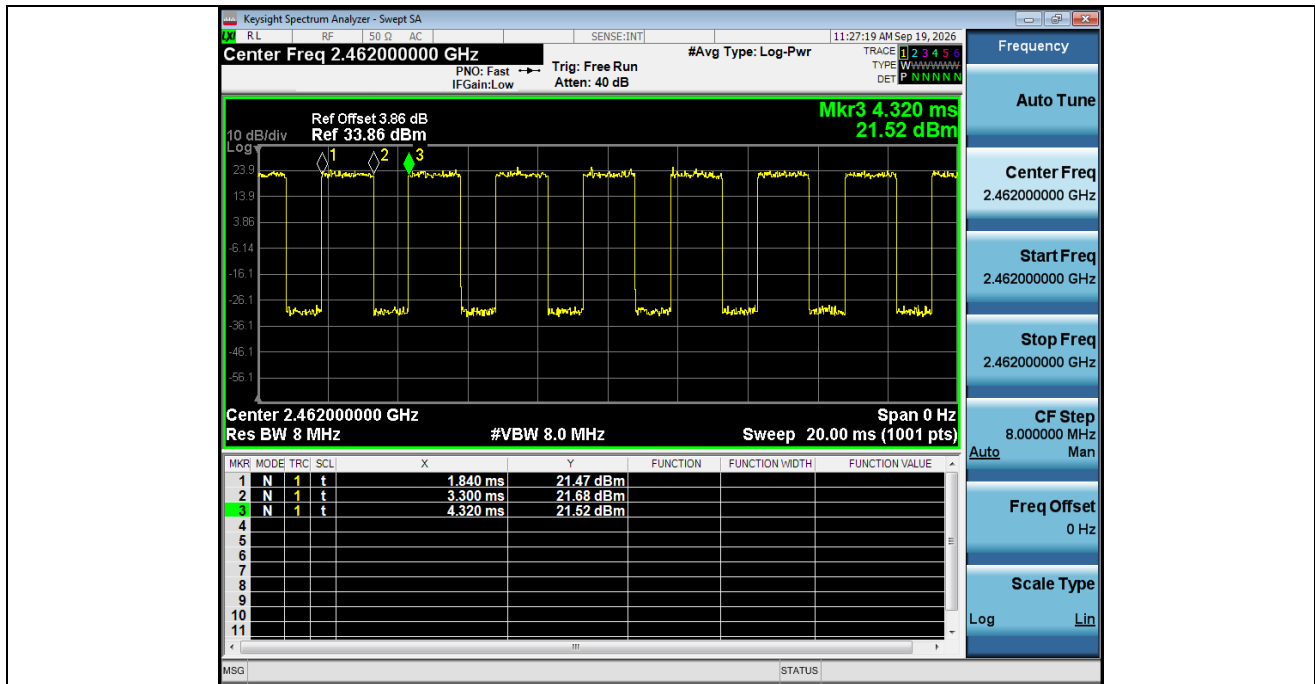


Duty Cycle NVNT ANT1 802 11n(HT40) 2422

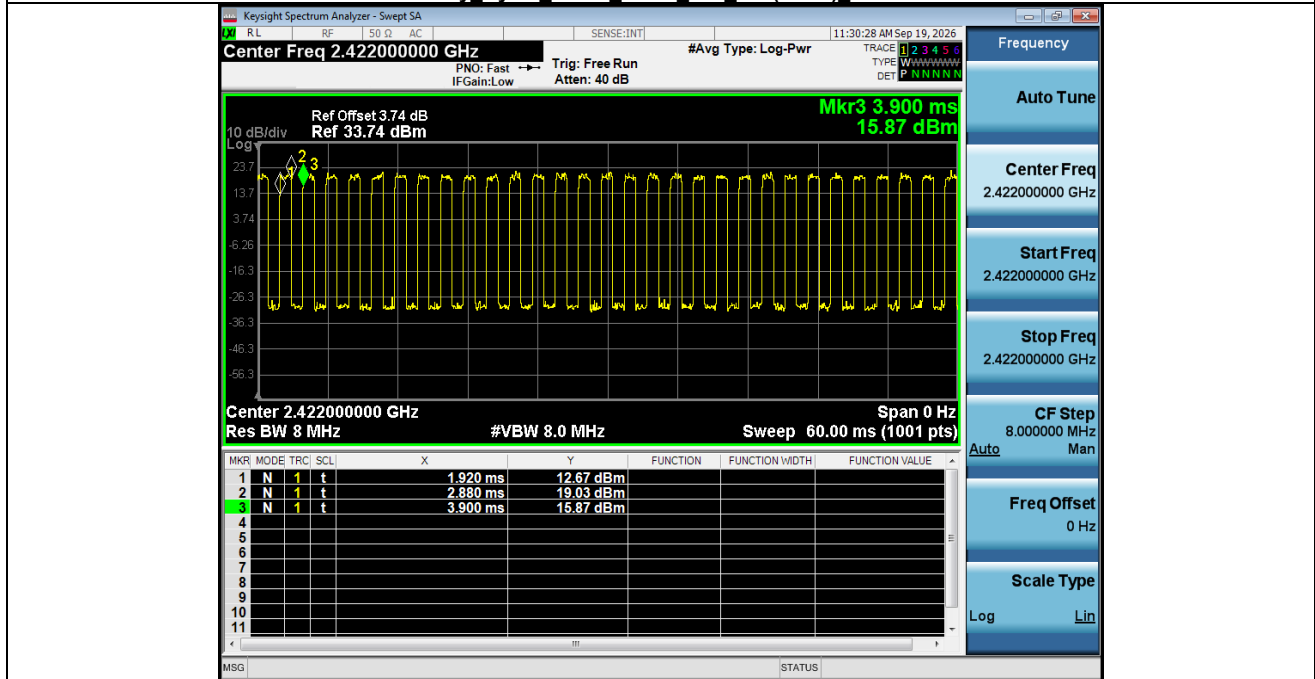



Duty Cycle NVNT ANT1 802 11n(HT40) 2437

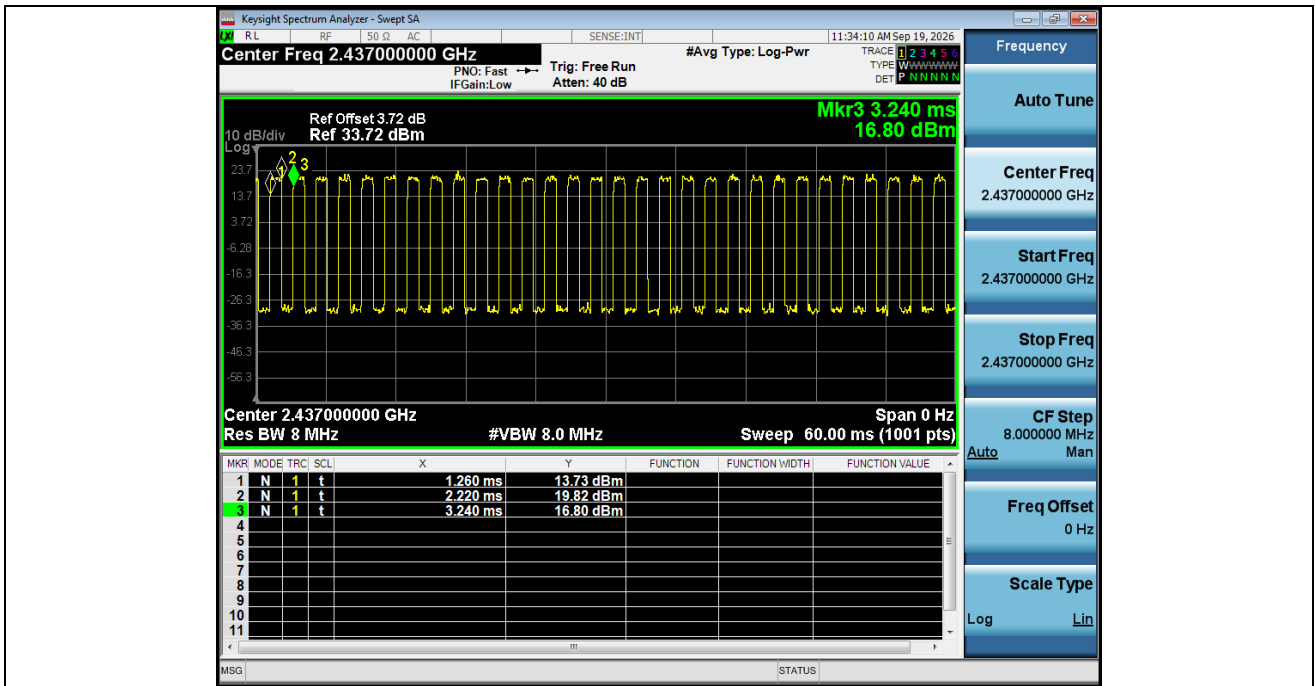


Duty Cycle NVNT ANT1 802 11n(HT40) 2452

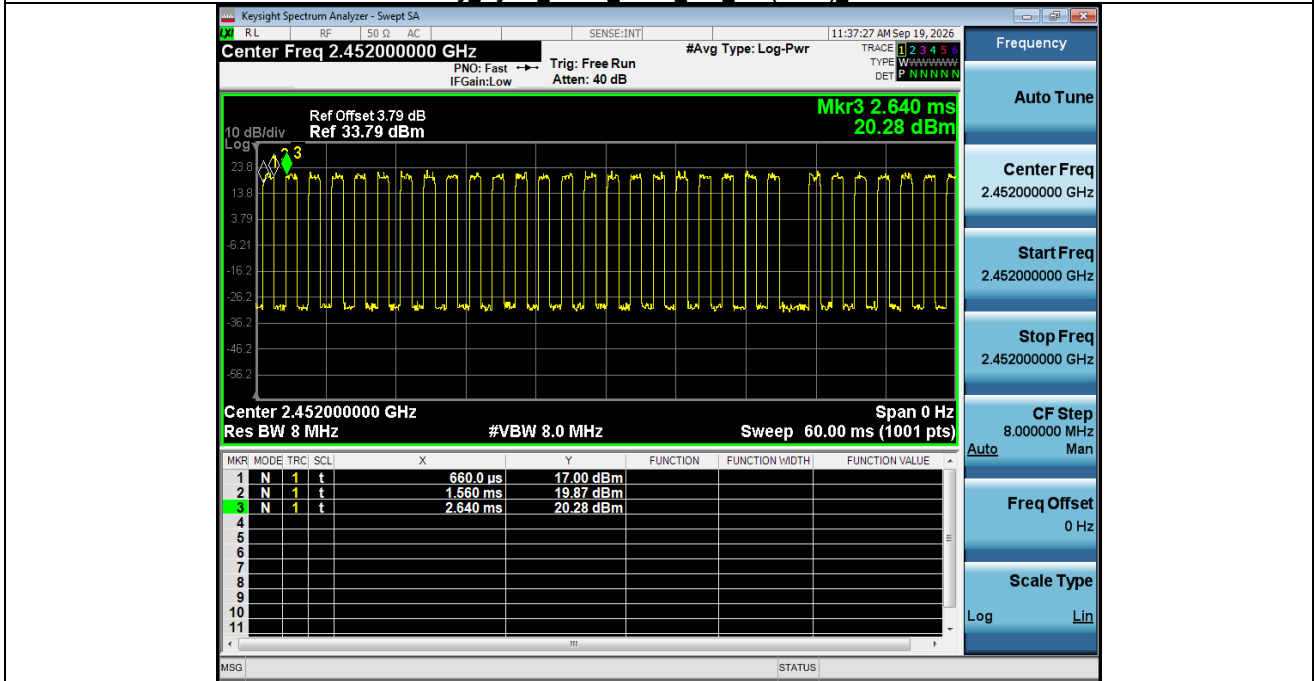

Duty Cycle NVNT ANT1 802 11ax(HE40) 2422

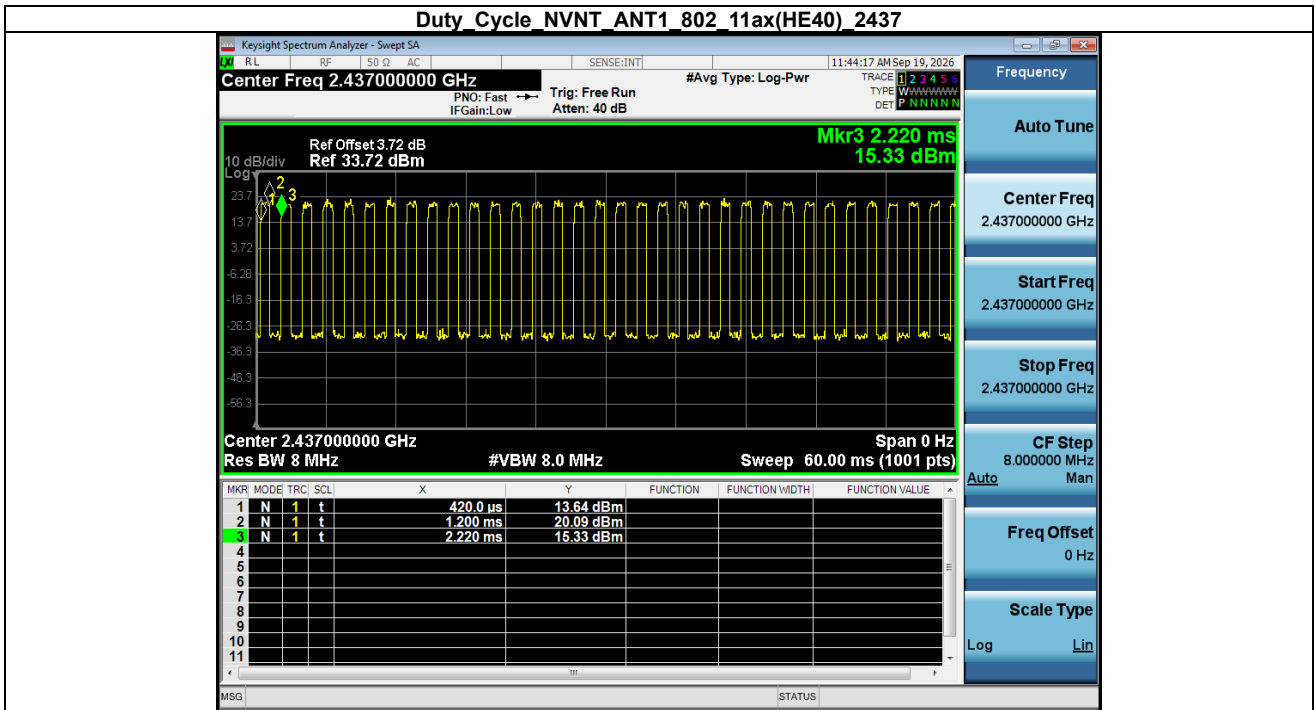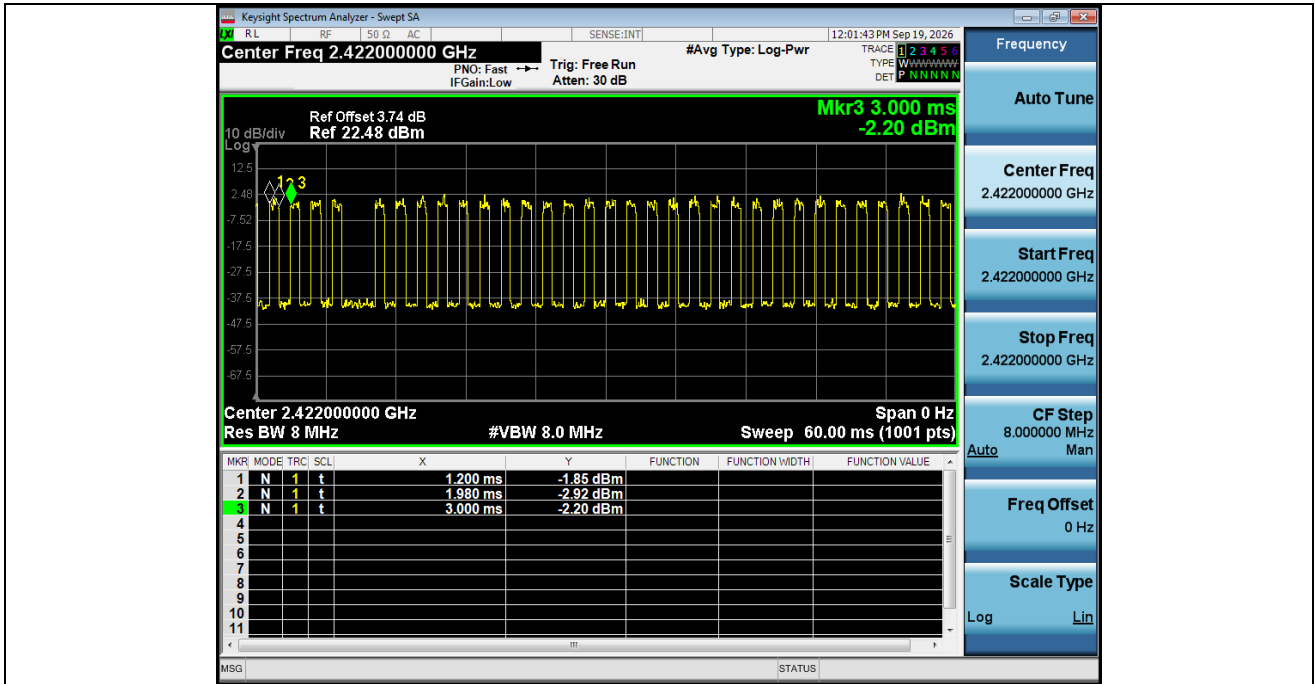

Duty Cycle NVNT ANT1 802 11ax(HE40) 2452

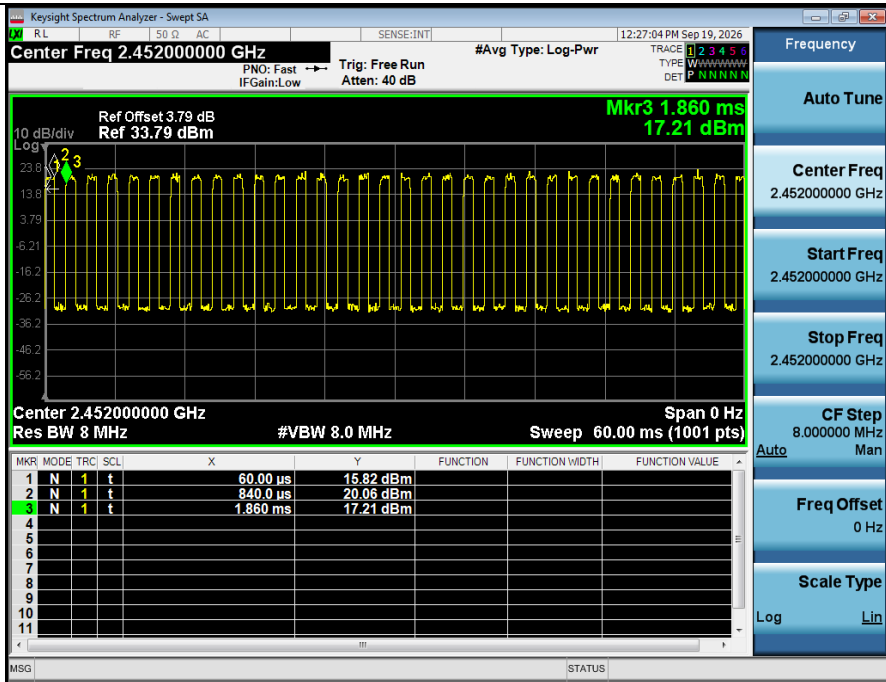


4. MAX. Output Power


Condition	Antenna	Modulation	Frequency (MHz)	Detector	Conducted Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412.00	Peak	21.53	30	Pass
NVNT	ANT1	802.11b	2437.00	Peak	20.72	30	Pass
NVNT	ANT1	802.11b	2462.00	Peak	20.48	30	Pass
NVNT	ANT1	802.11g	2412.00	Peak	25.65	30	Pass
NVNT	ANT1	802.11g	2437.00	Peak	26.02	30	Pass
NVNT	ANT1	802.11g	2462.00	Peak	25.66	30	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	Peak	25.52	30	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	Peak	25.89	30	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	Peak	25.58	30	Pass
NVNT	ANT1	802.11ax(HE20)	2412.00	Peak	26.78	30	Pass
NVNT	ANT1	802.11ax(HE20)	2437.00	Peak	27.17	30	Pass
NVNT	ANT1	802.11ax(HE20)	2462.00	Peak	26.88	30	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	Peak	25.15	30	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	Peak	25.78	30	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	Peak	25.60	30	Pass
NVNT	ANT1	802.11ax(HE40)	2422.00	Peak	26.36	30	Pass
NVNT	ANT1	802.11ax(HE40)	2437.00	Peak	26.99	30	Pass
NVNT	ANT1	802.11ax(HE40)	2452.00	Peak	26.64	30	Pass

5. Power Spectral Density


Condition	Antenna	Modulation	Frequency (MHz)	SA_PSD(dBm/30kHz)	limit(dBm/3kHz)	Result
NVNT	ANT1	802.11b	2412.00	7.89	8	Pass
NVNT	ANT1	802.11b	2437.00	7.62	8	Pass
NVNT	ANT1	802.11b	2462.00	6.29	8	Pass
NVNT	ANT1	802.11g	2412.00	3.69	8	Pass
NVNT	ANT1	802.11g	2437.00	3.51	8	Pass
NVNT	ANT1	802.11g	2462.00	3.78	8	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	3.88	8	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	3.71	8	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	3.00	8	Pass
NVNT	ANT1	802.11ax(HE20)	2412.00	3.39	8	Pass
NVNT	ANT1	802.11ax(HE20)	2437.00	3.96	8	Pass
NVNT	ANT1	802.11ax(HE20)	2462.00	3.50	8	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	-0.09	8	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	0.92	8	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	0.06	8	Pass
NVNT	ANT1	802.11ax(HE40)	2422.00	0.97	8	Pass
NVNT	ANT1	802.11ax(HE40)	2437.00	1.74	8	Pass
NVNT	ANT1	802.11ax(HE40)	2452.00	1.17	8	Pass

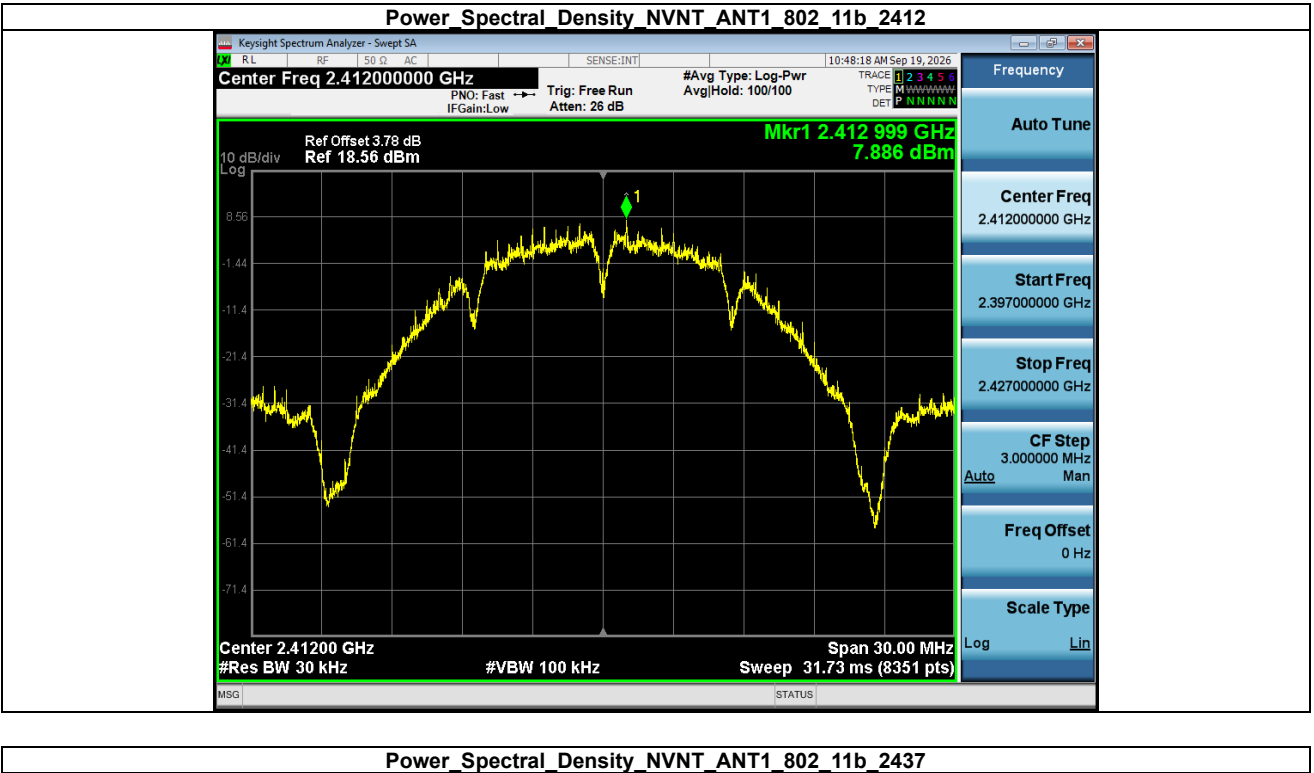


Power Spectral Density NVNT ANT1 802 11b 2437

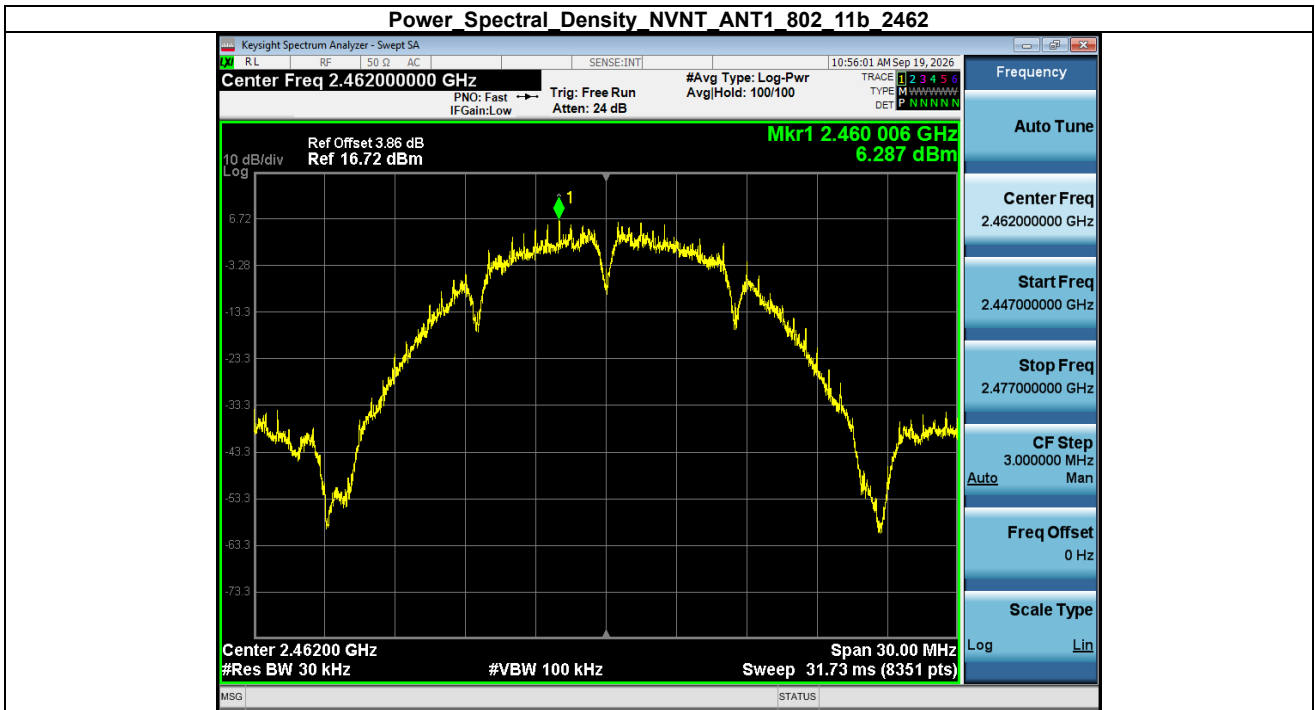


Power_Spectral_Density_NVNT_ANT1_802_11g_2412

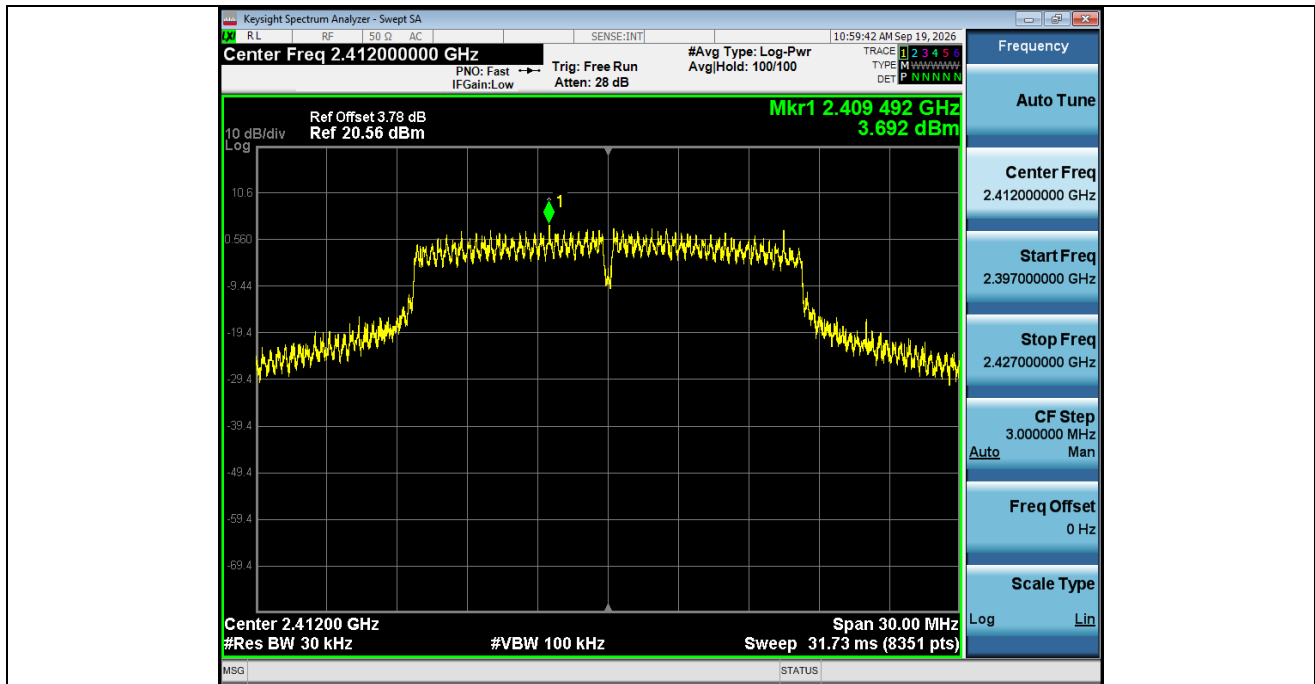


Power Spectral Density NVNT ANT1 802_11g_2437

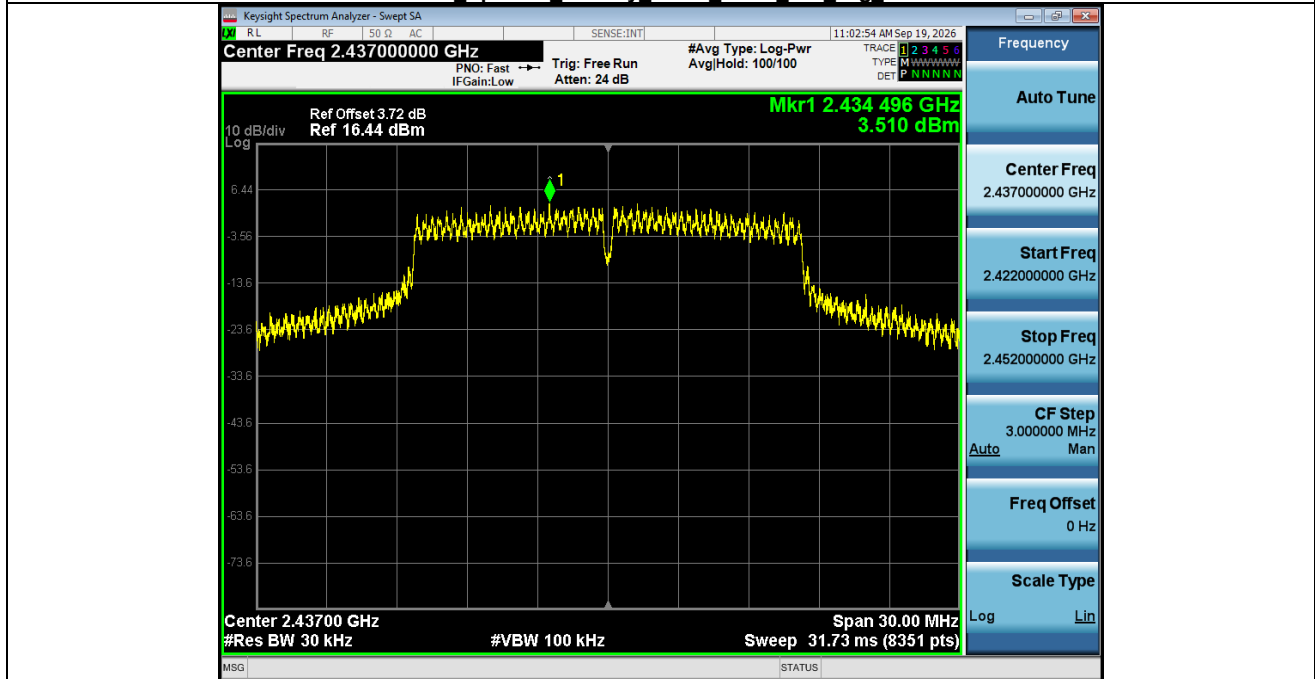


Power_Spectral_Density_NVNT_ANT1_802_11g_2462

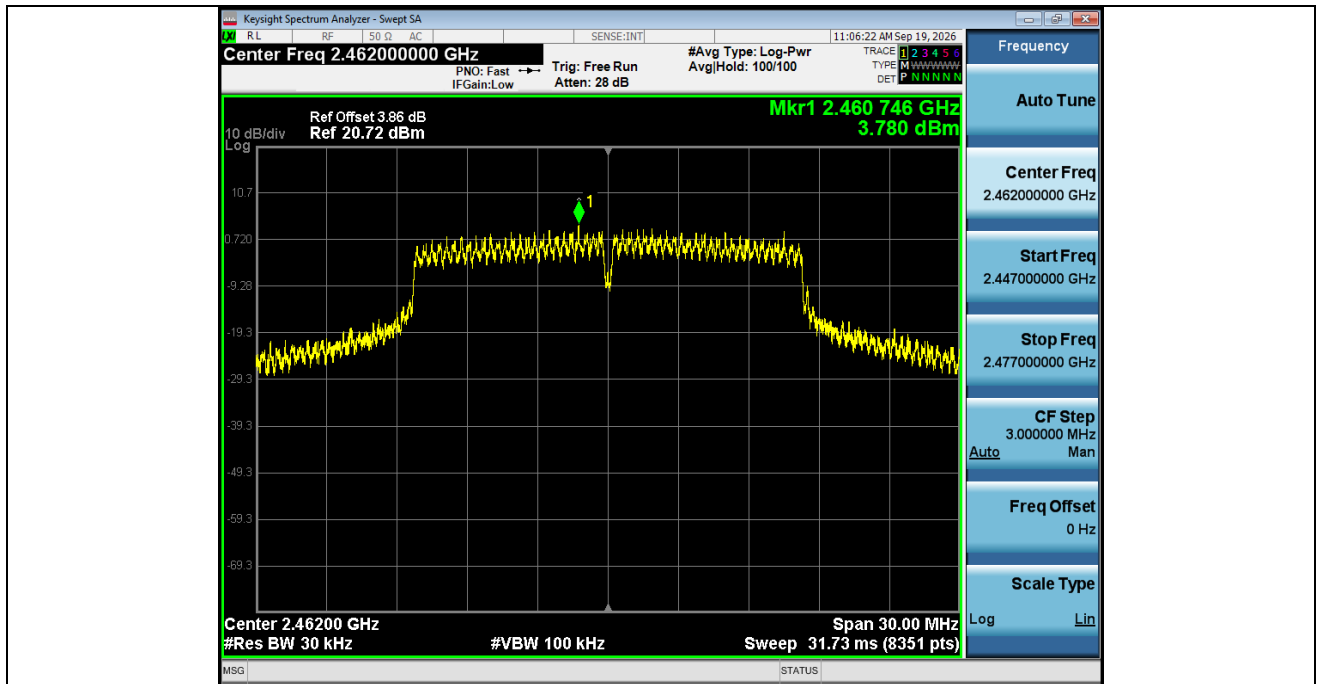


Power Spectral Density NVNT ANT1 802_11n(HT20)_2412

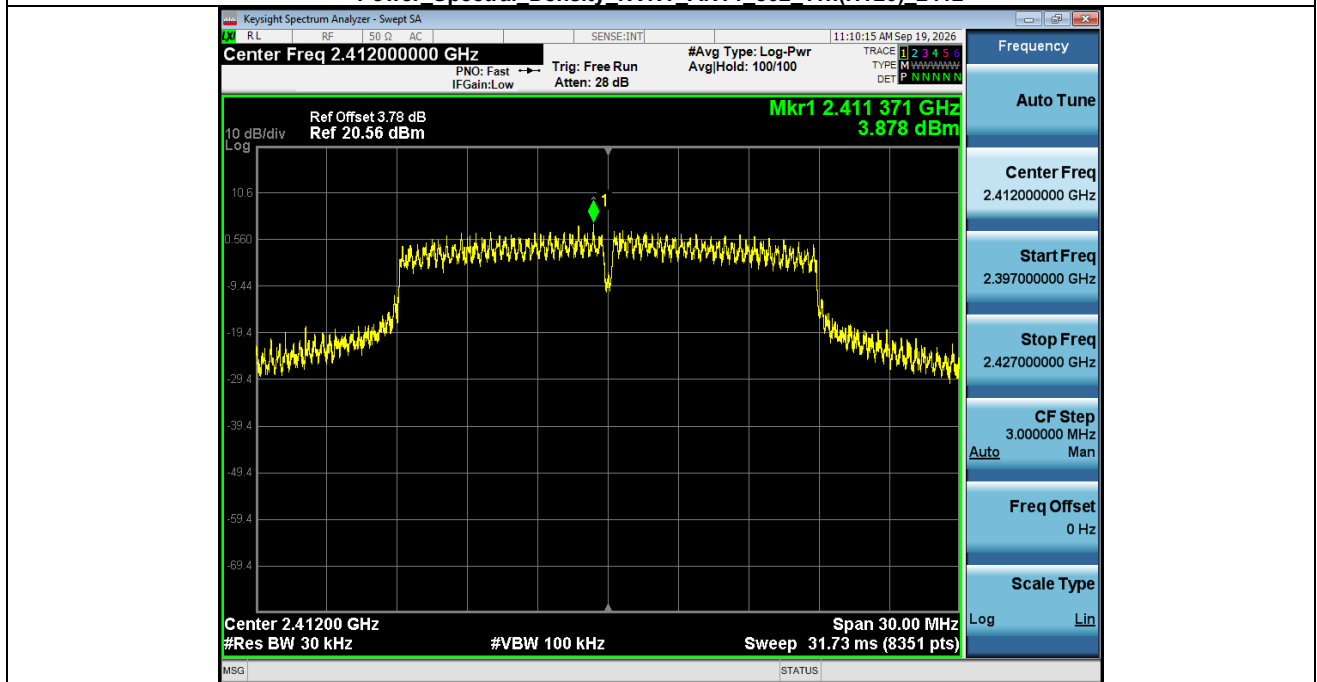


Power Spectral Density NVNT ANT1 802_11n(HT20)_2437

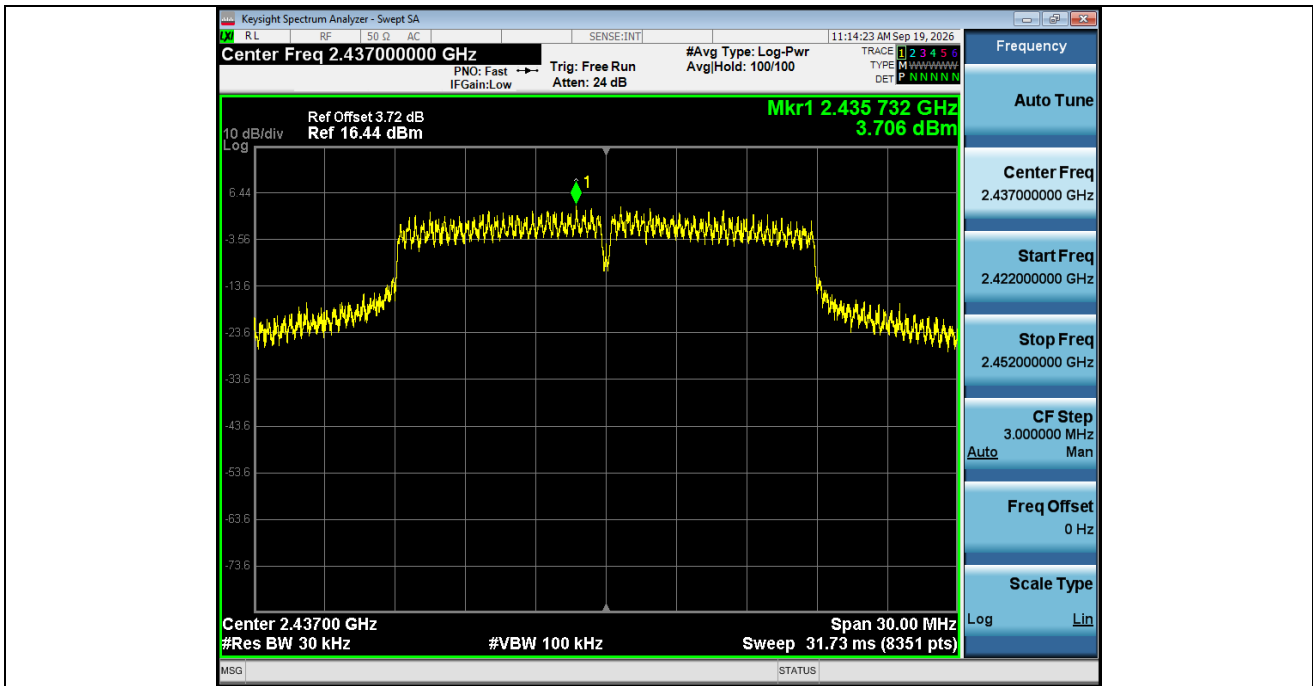


Power Spectral Density NVNT ANT1 802_11n(HT20)_2462

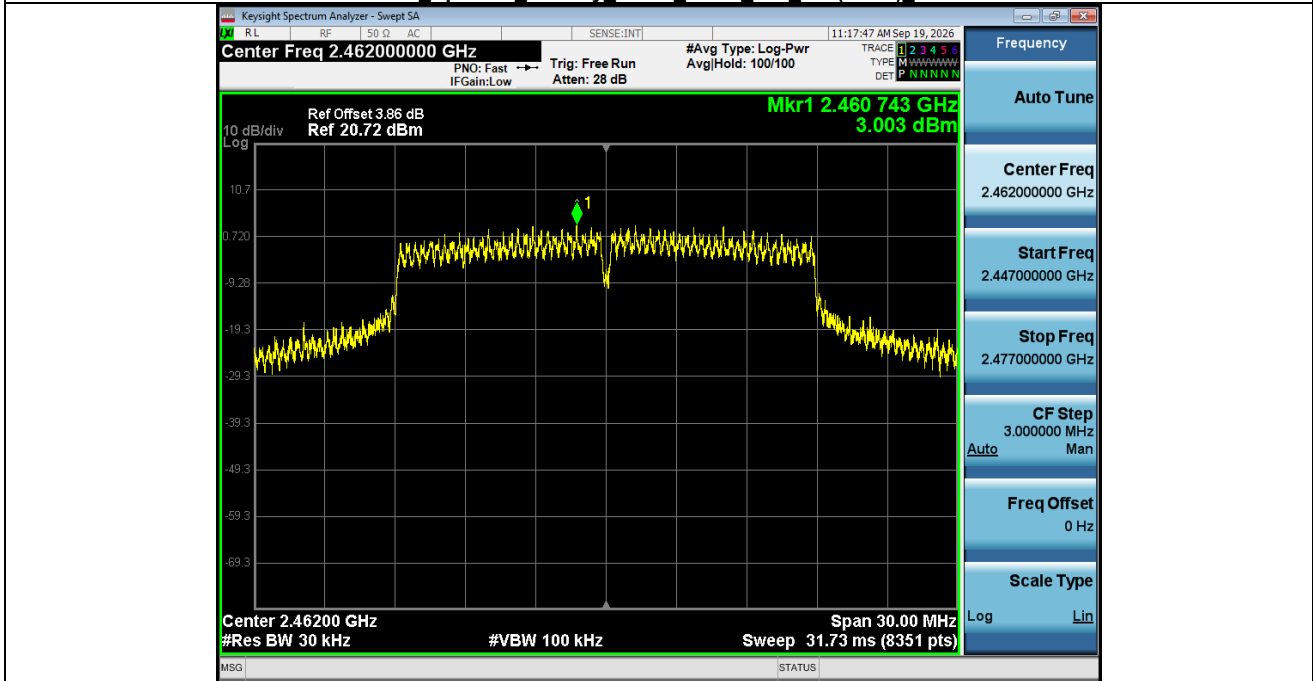


Power Spectral Density NVNT ANT1 802_11ax(HE20)_2412

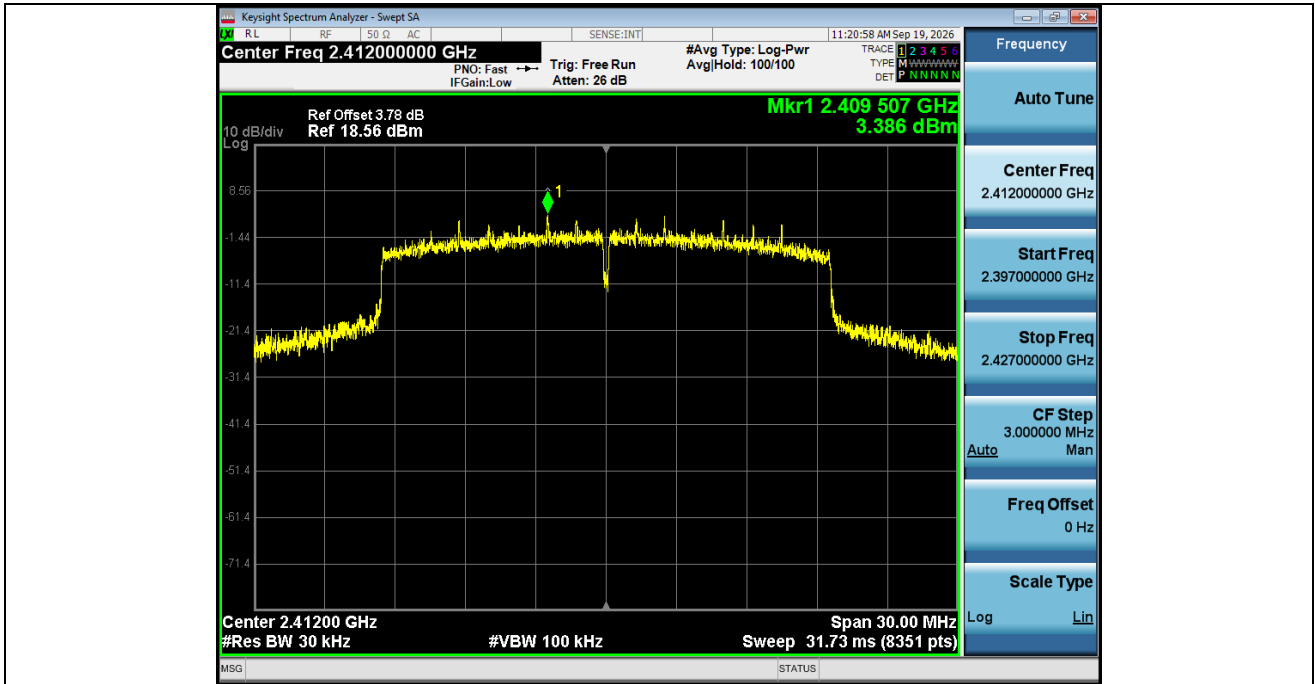


Power Spectral Density NVNT ANT1 802 11ax(HE20) 2437

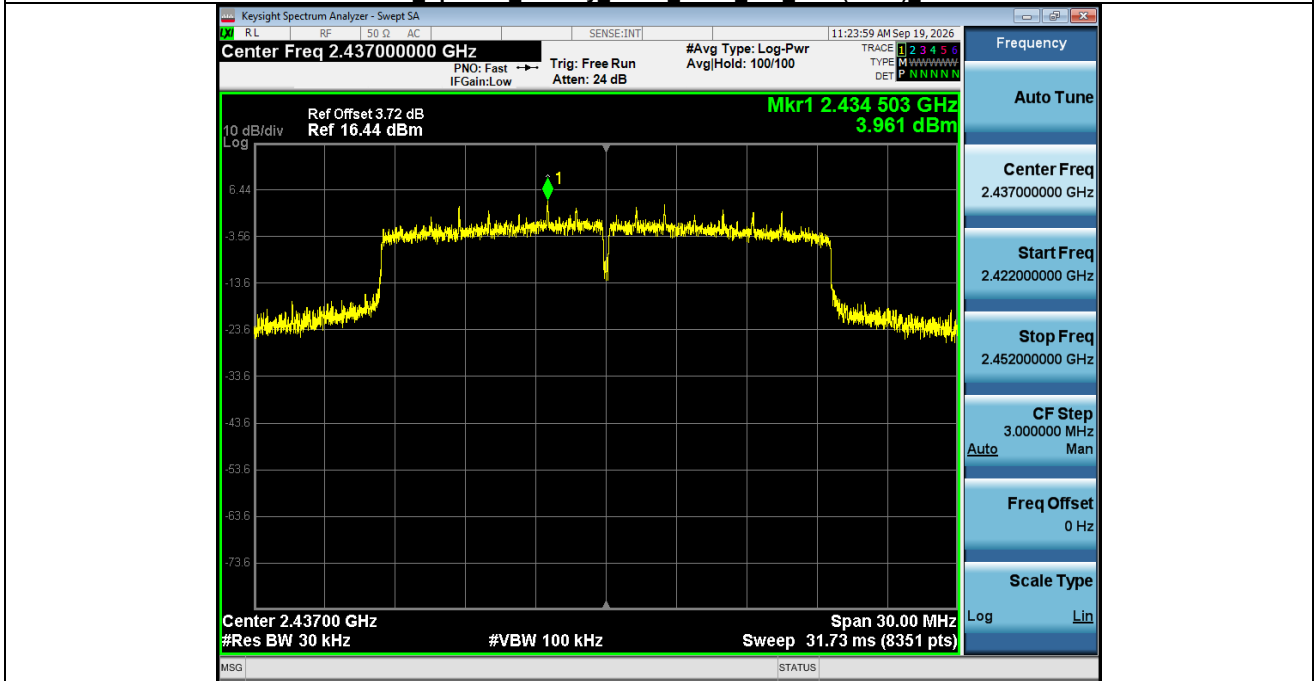


Power Spectral Density NVNT ANT1 802 11ax(HE20) 2462

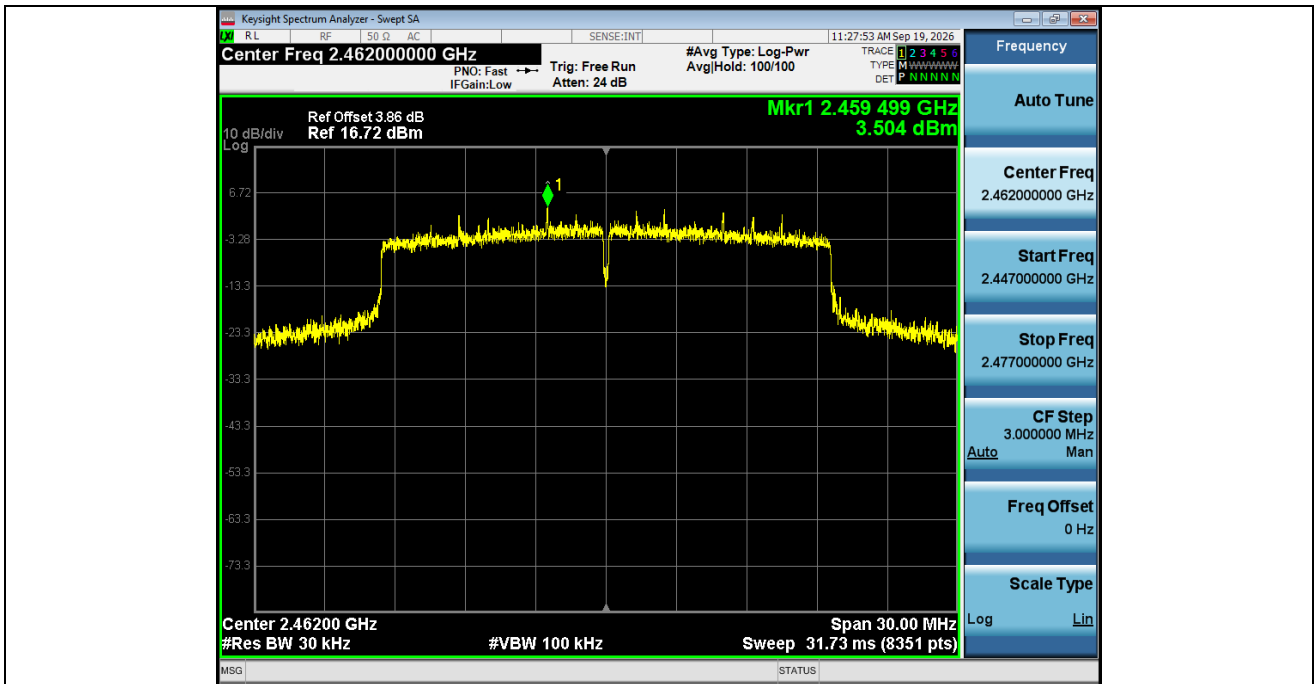


Power Spectral Density NVNT ANT1 802_11n(HT40)_2422

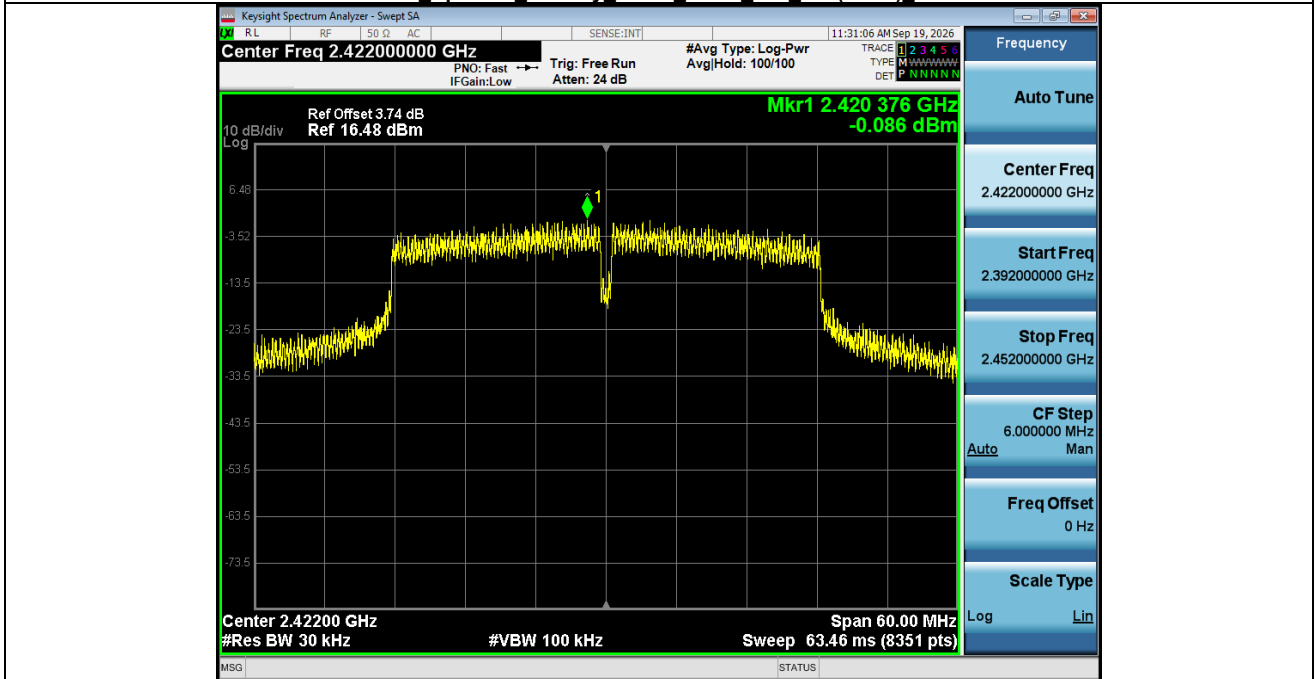


Power Spectral Density NVNT ANT1 802_11n(HT40)_2437

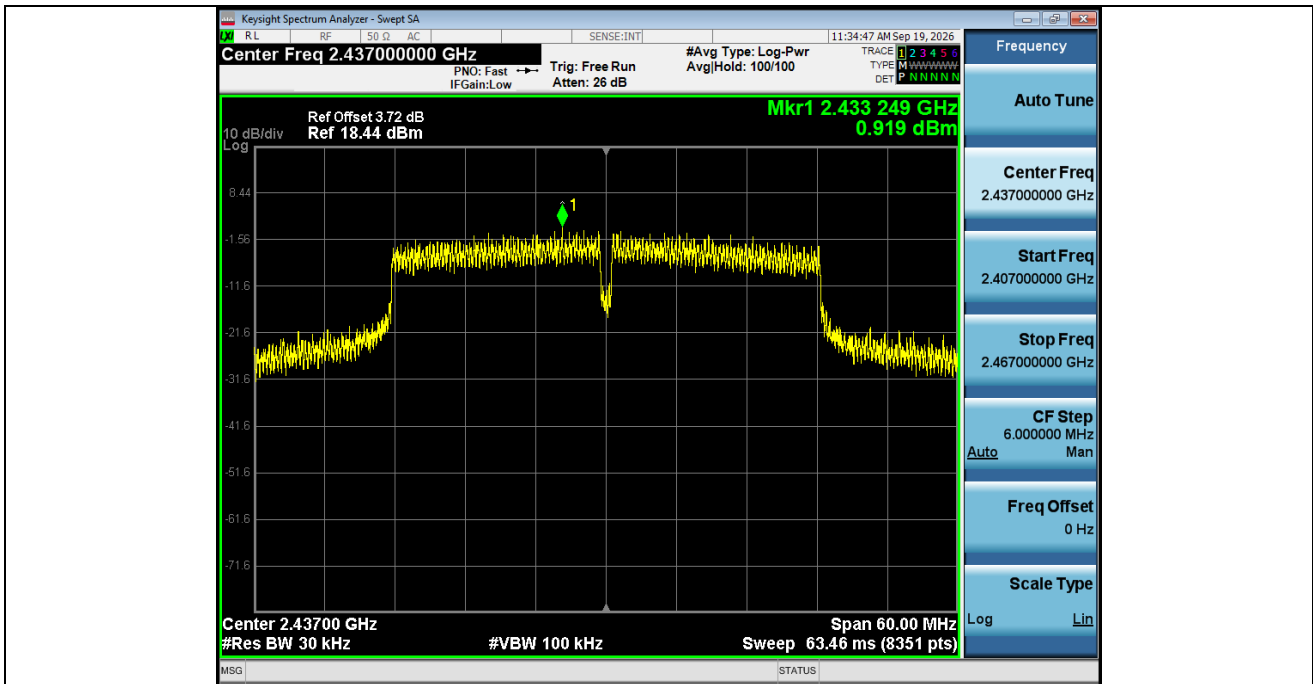


Power Spectral Density NVNT ANT1 802_11n(HT40)_2452

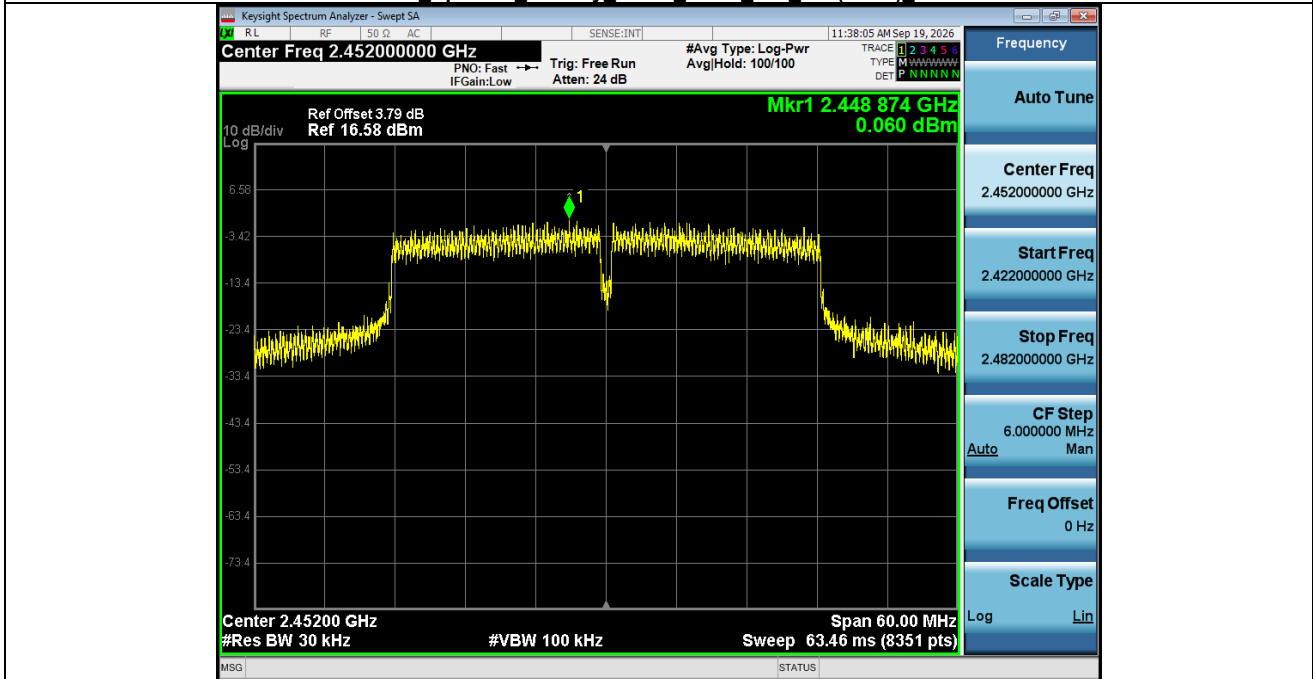

Power Spectral Density NVNT ANT1 802_11ax(HE40)_2422

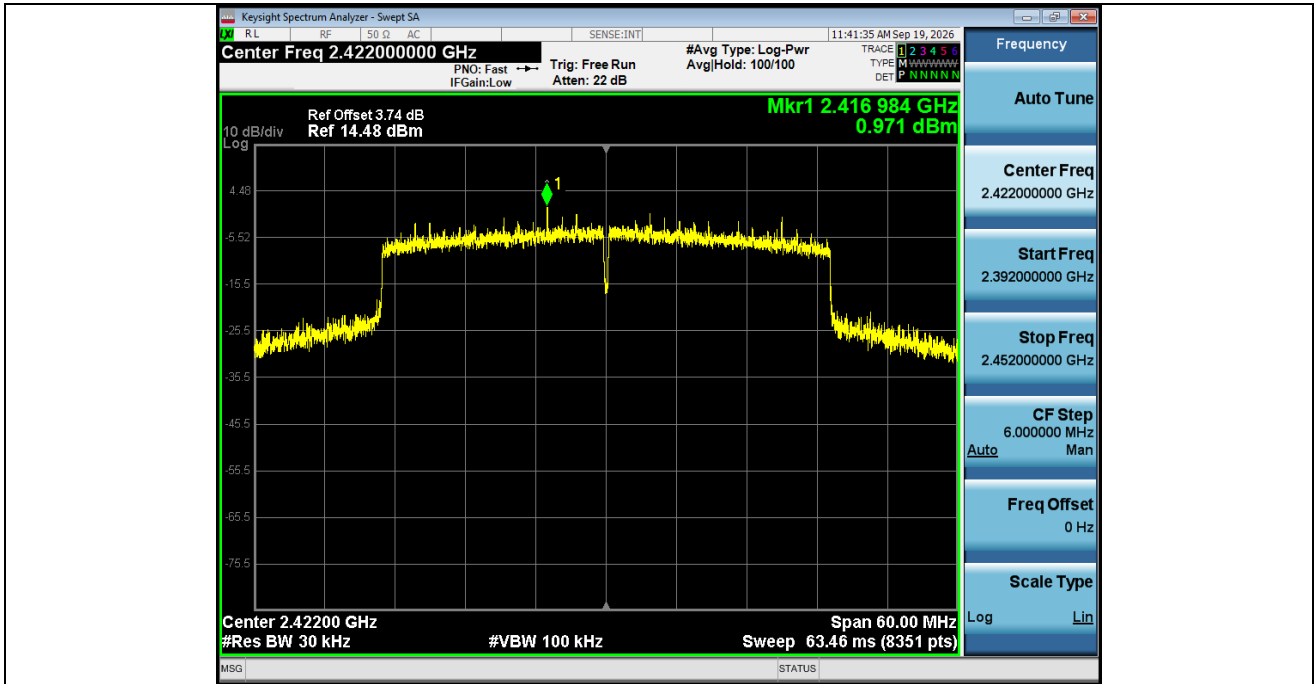


Power Spectral Density NVNT ANT1 802 11ax(HE40) 2437

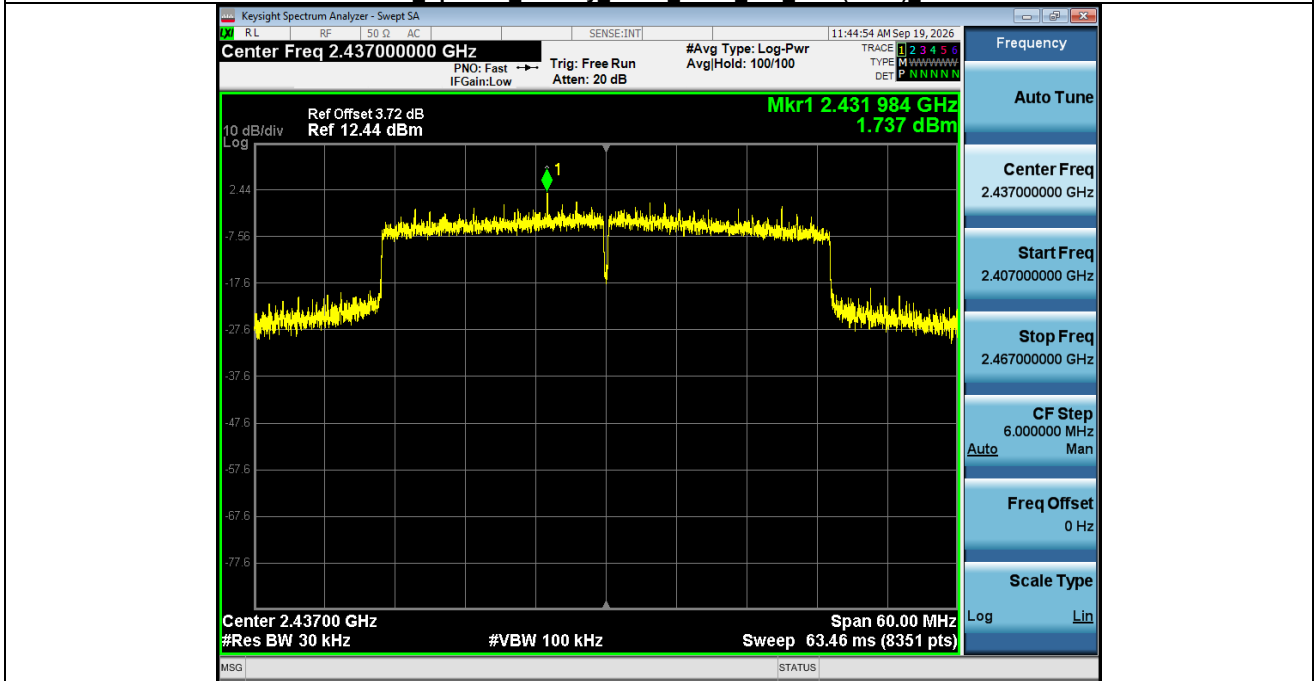


Power Spectral Density NVNT ANT1 802 11ax(HE40) 2452

6. Bandedge

Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark_freq(MHz)	Ref_level(dBm)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412.00	2397.472	10.331	-25.393	-9.669	Pass
NVNT	ANT1	802.11b	2462.00	2488.336	9.694	-47.504	-10.306	Pass
NVNT	ANT1	802.11g	2412.00	2398.928	7.951	-15.374	-12.049	Pass
NVNT	ANT1	802.11g	2462.00	2483.872	7.253	-26.929	-12.747	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	2399.824	7.020	-14.534	-12.980	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	2483.584	7.726	-25.517	-12.274	Pass
NVNT	ANT1	802.11ax(HE20)	2412.00	2399.712	8.168	-15.402	-11.832	Pass
NVNT	ANT1	802.11ax(HE20)	2462.00	2483.536	8.766	-22.978	-11.234	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	2398.572	4.223	-18.366	-15.777	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	2484.496	5.020	-18.914	-14.980	Pass
NVNT	ANT1	802.11ax(HE40)	2422.00	2399.496	5.082	-17.388	-14.918	Pass
NVNT	ANT1	802.11ax(HE40)	2452.00	2484.496	5.068	-19.537	-14.932	Pass

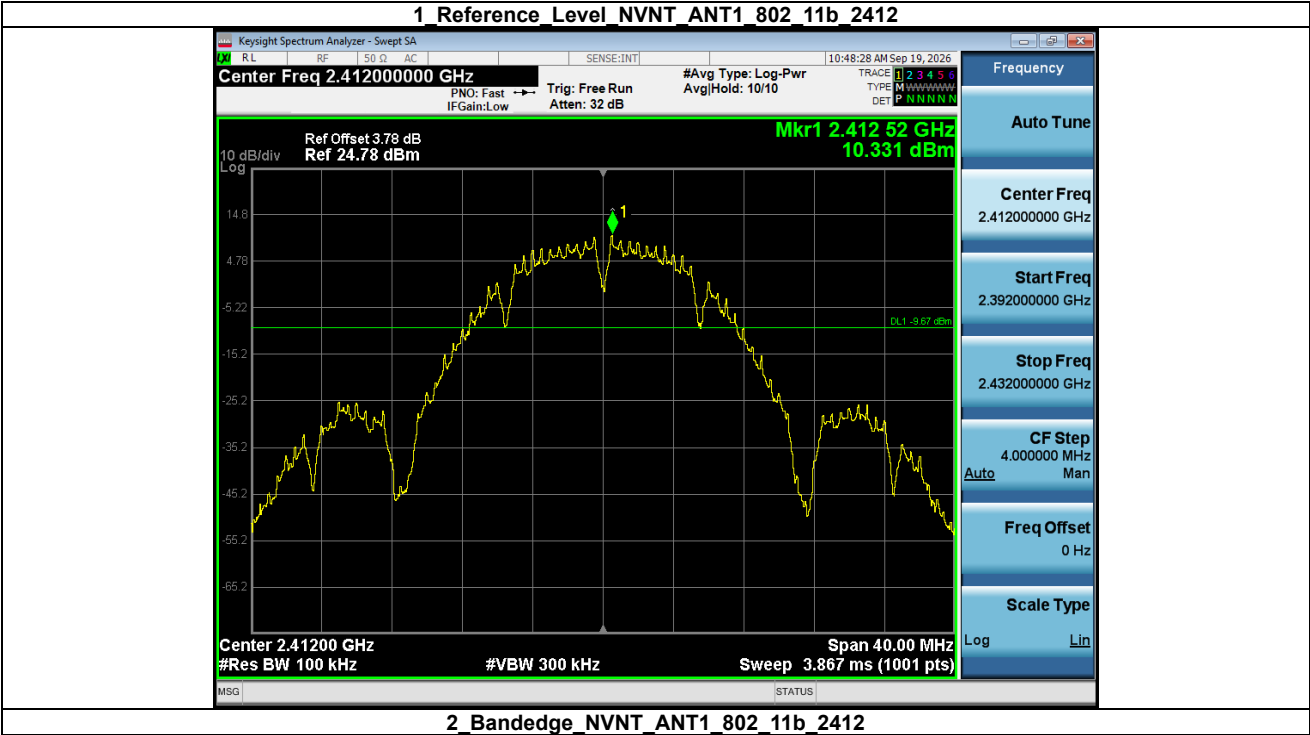

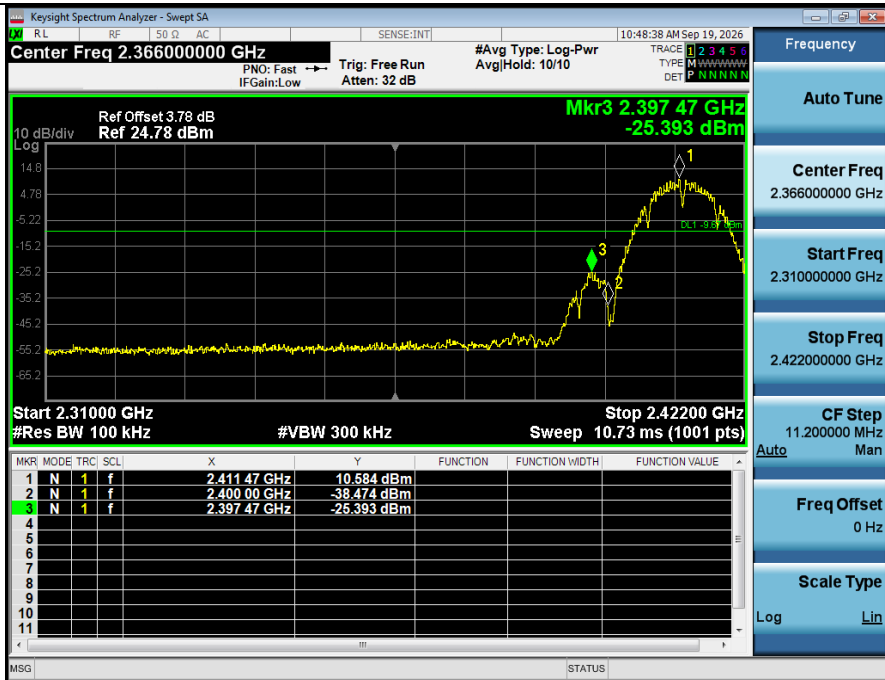


1 Reference Level NVNT ANT1 802 11b 2462




2 Bandedge NVNT ANT1 802 11b 2462




1 Reference Level NVNT ANT1 802 11g 2412

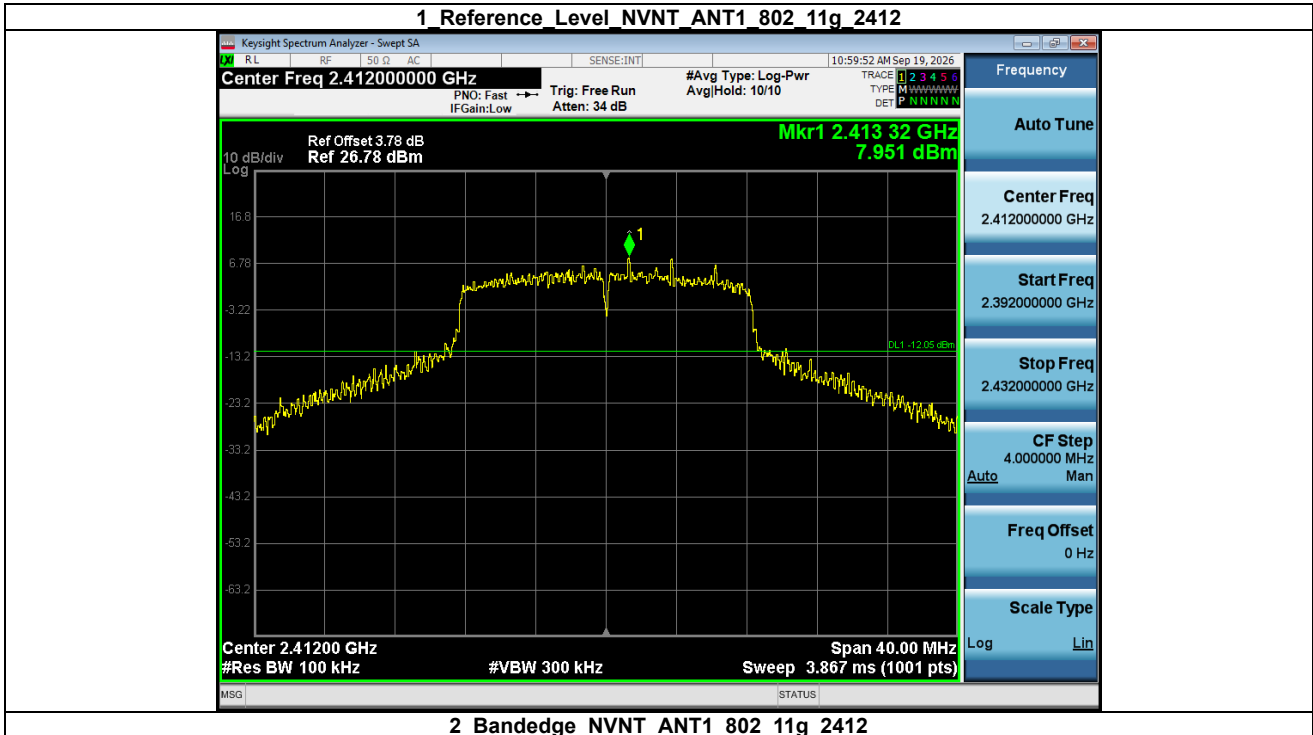

2 Bandedge NVNT ANT1 802 11g 2412

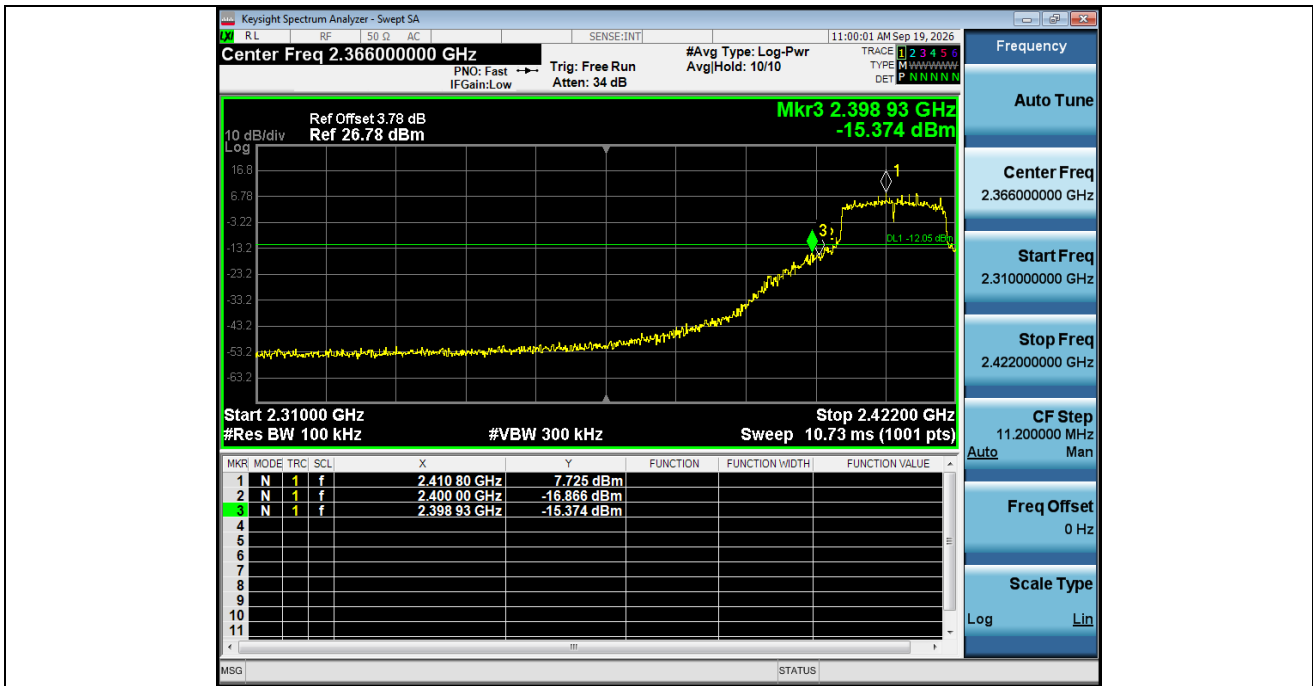


1 Reference Level NVNT ANT1 802 11g 2462

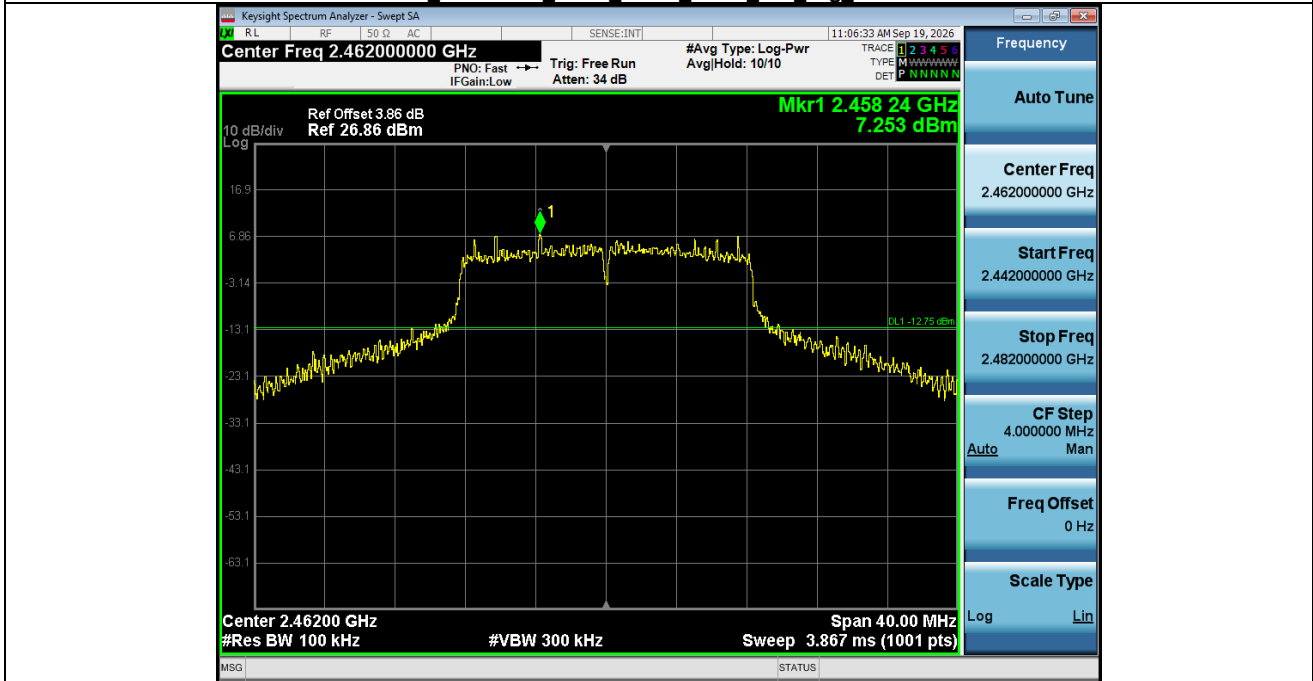


2 Bandedge NVNT ANT1 802 11g 2462




1 Reference Level NVNT ANT1 802 11n(HT20) 2412

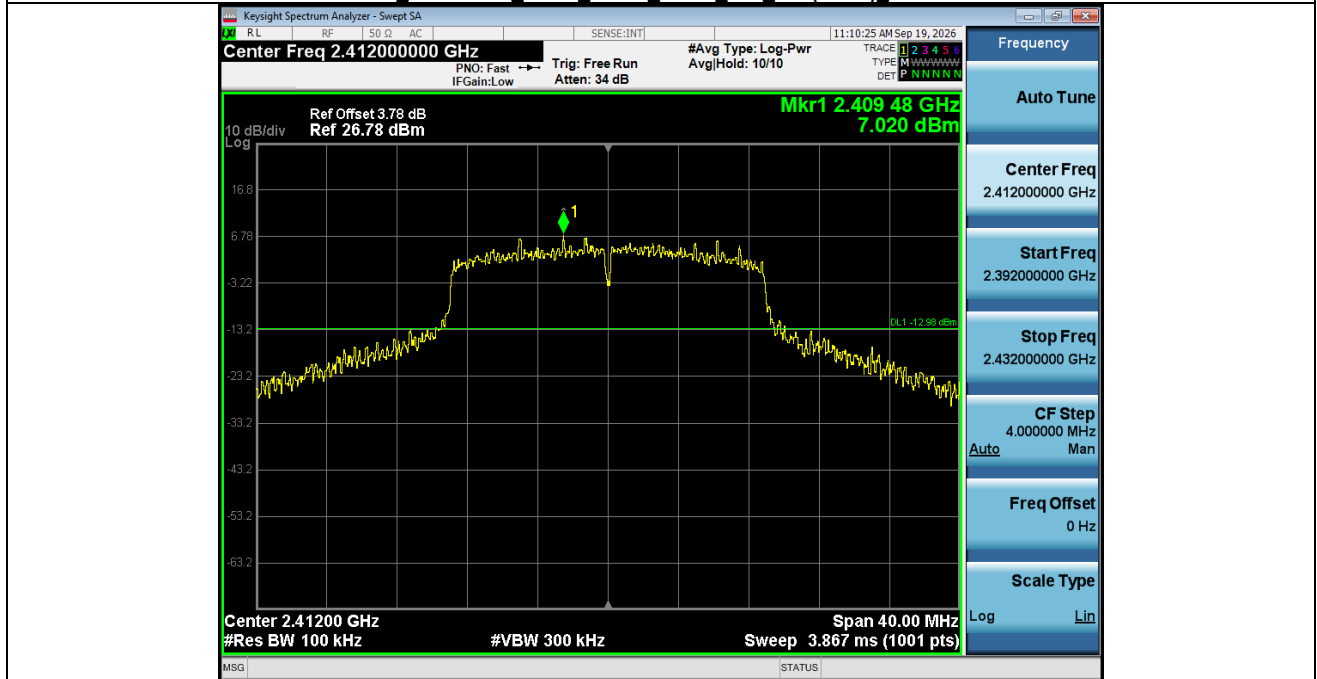

2 Bandedge NVNT ANT1 802 11n(HT20) 2412

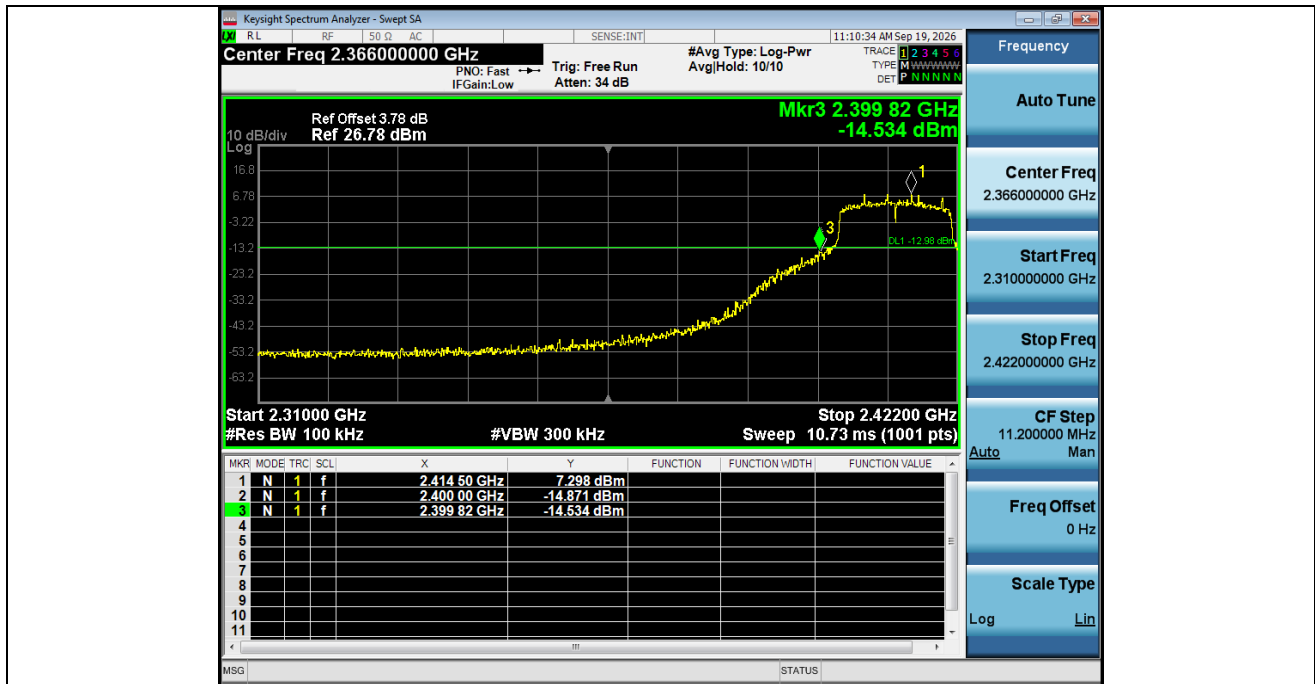


1 Reference Level NVNT ANT1 802 11n(HT20) 2462

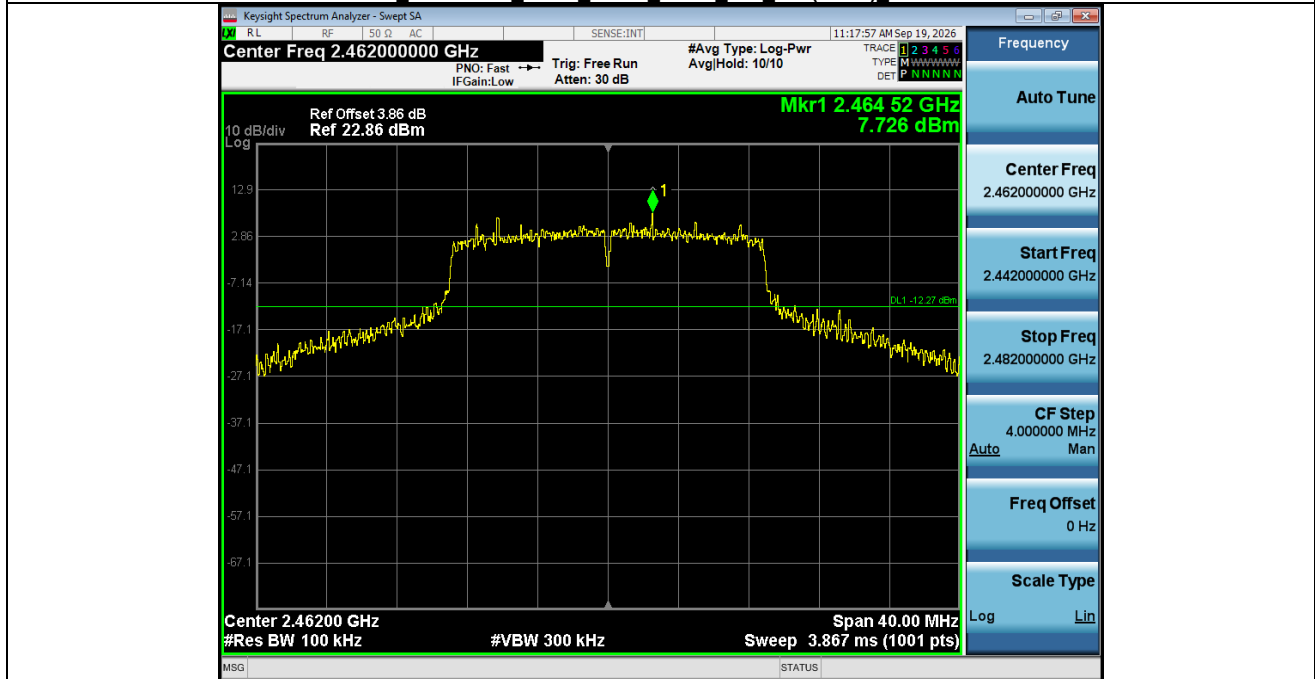


2 Bandedge NVNT ANT1 802 11n(HT20) 2462




1 Reference Level NVNT ANT1 802 11ax(HE20) 2412

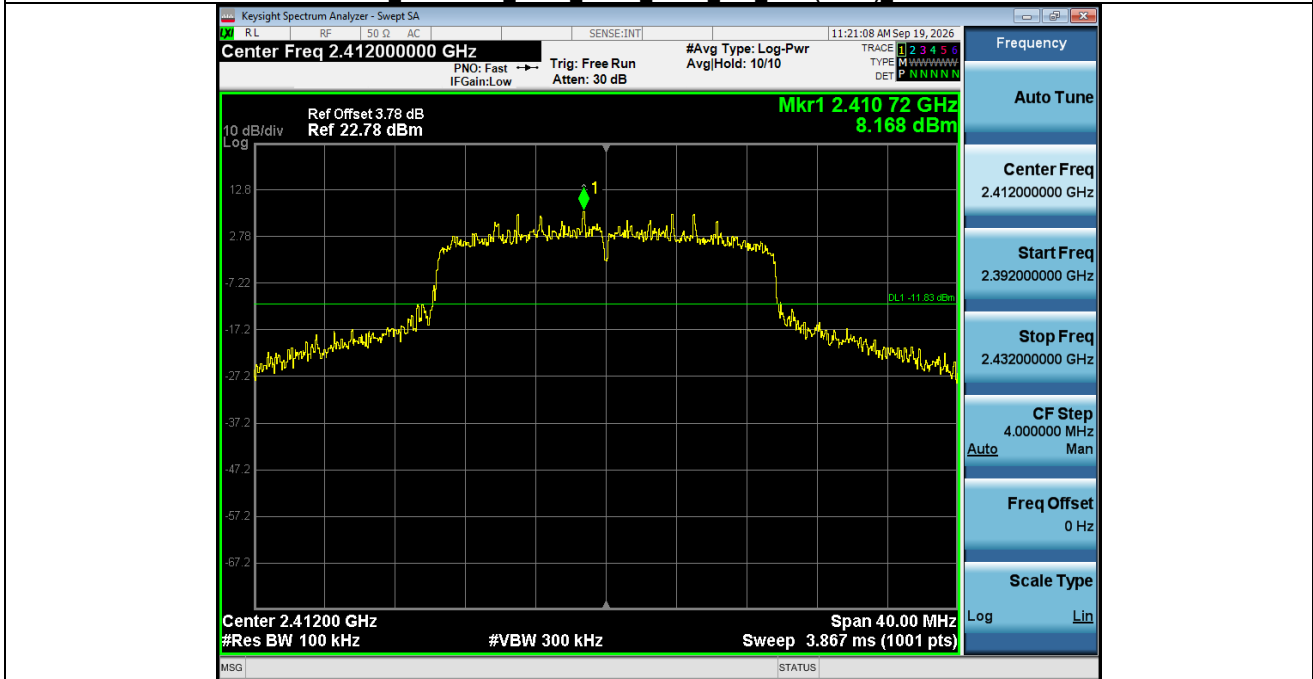

2 Bandedge NVNT ANT1 802 11ax(HE20) 2412

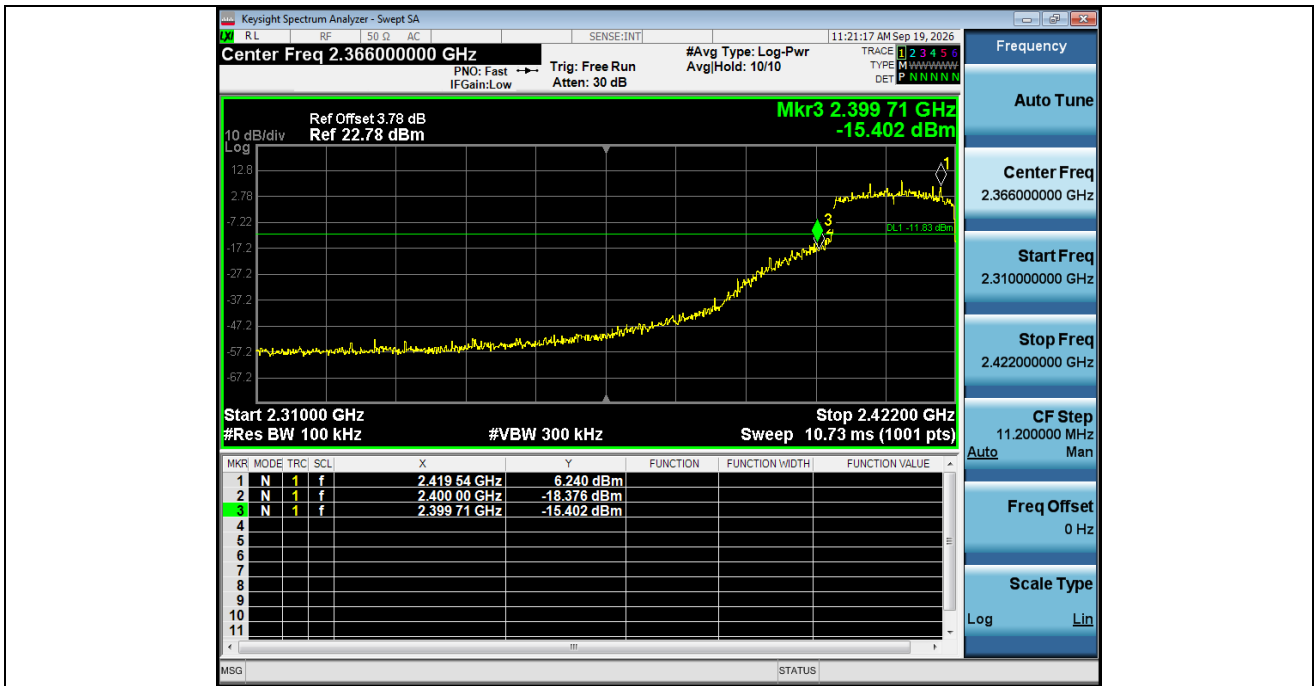


1 Reference Level NVNT ANT1 802 11ax(HE20) 2462

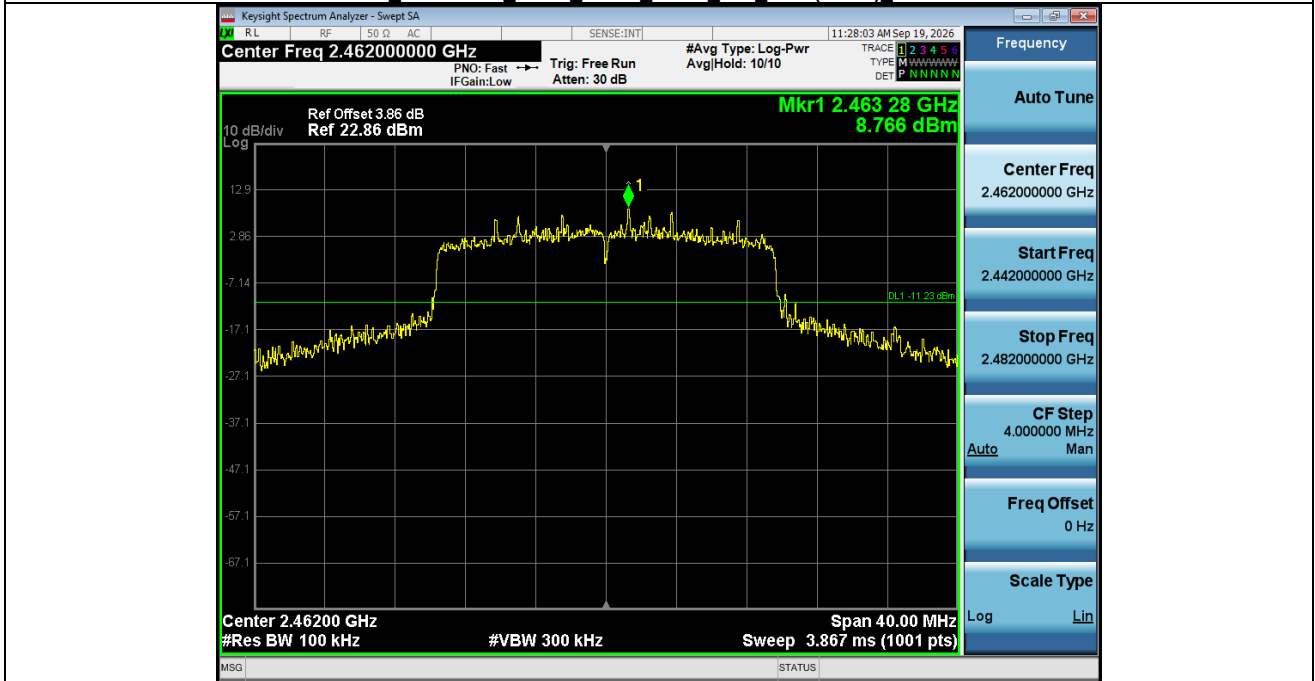

2 Bandedge NVNT ANT1 802 11ax(HE20) 2462




1 Reference Level NVNT ANT1 802 11n(HT40) 2422

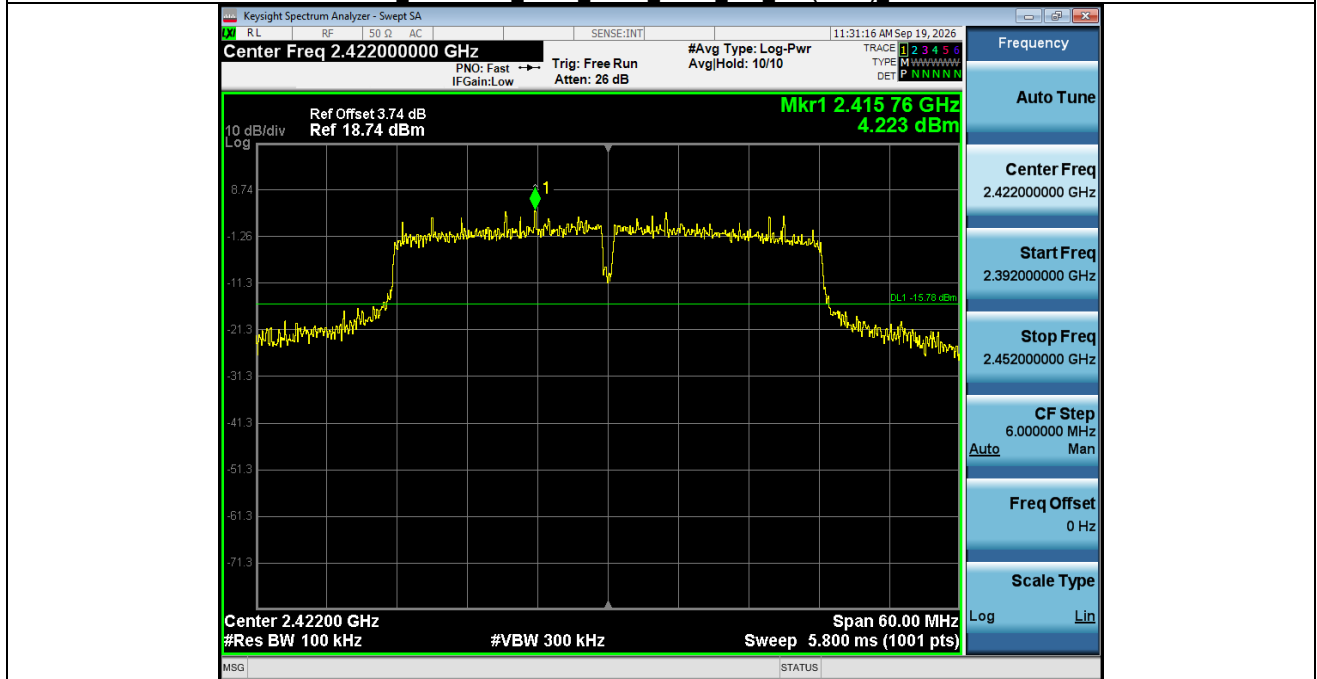


2 Bandedge NVNT ANT1 802 11n(HT40) 2422




1 Reference Level NVNT ANT1 802 11n(HT40) 2452

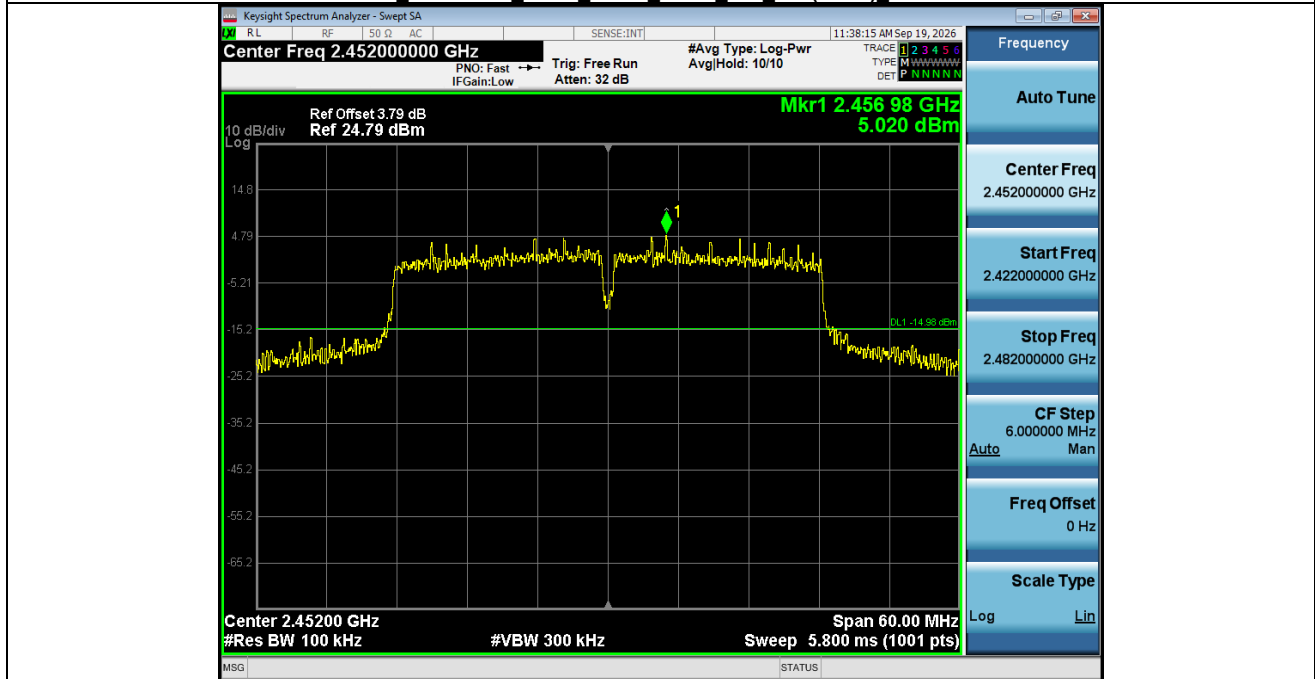


2 Bandedge NVNT ANT1 802 11n(HT40) 2452

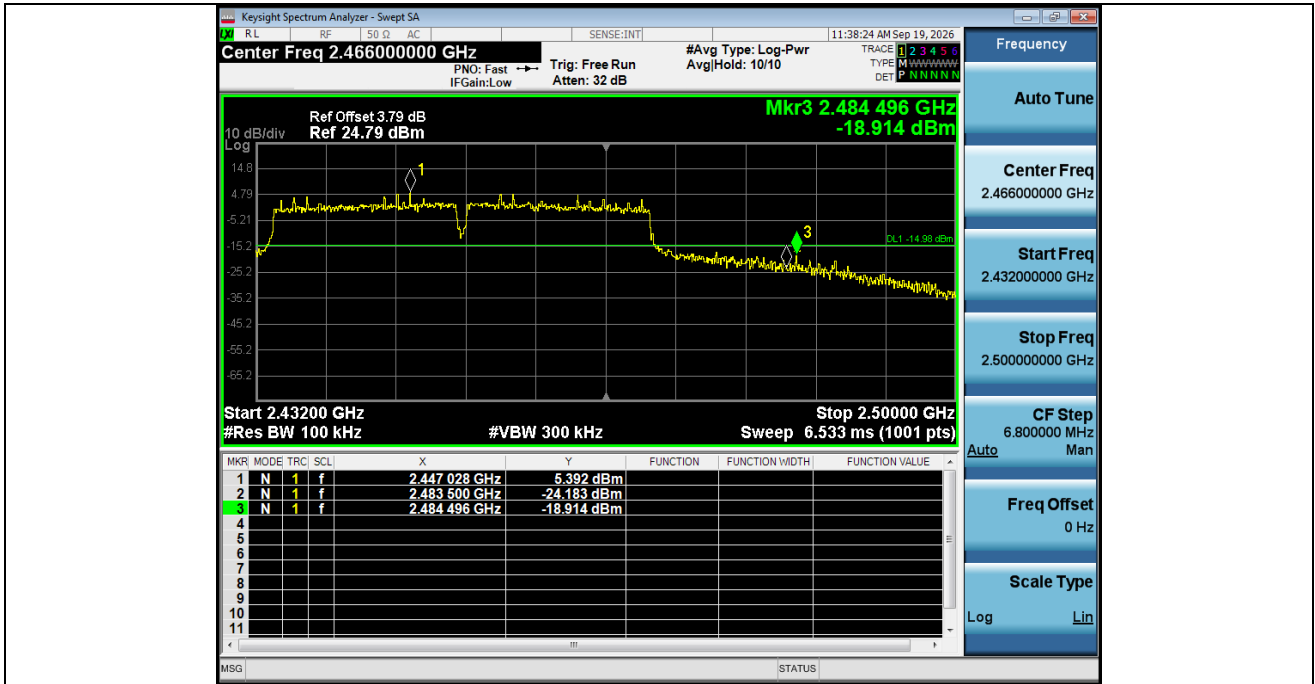

1 Reference Level NVNT ANT1 802 11ax(HE40) 2422

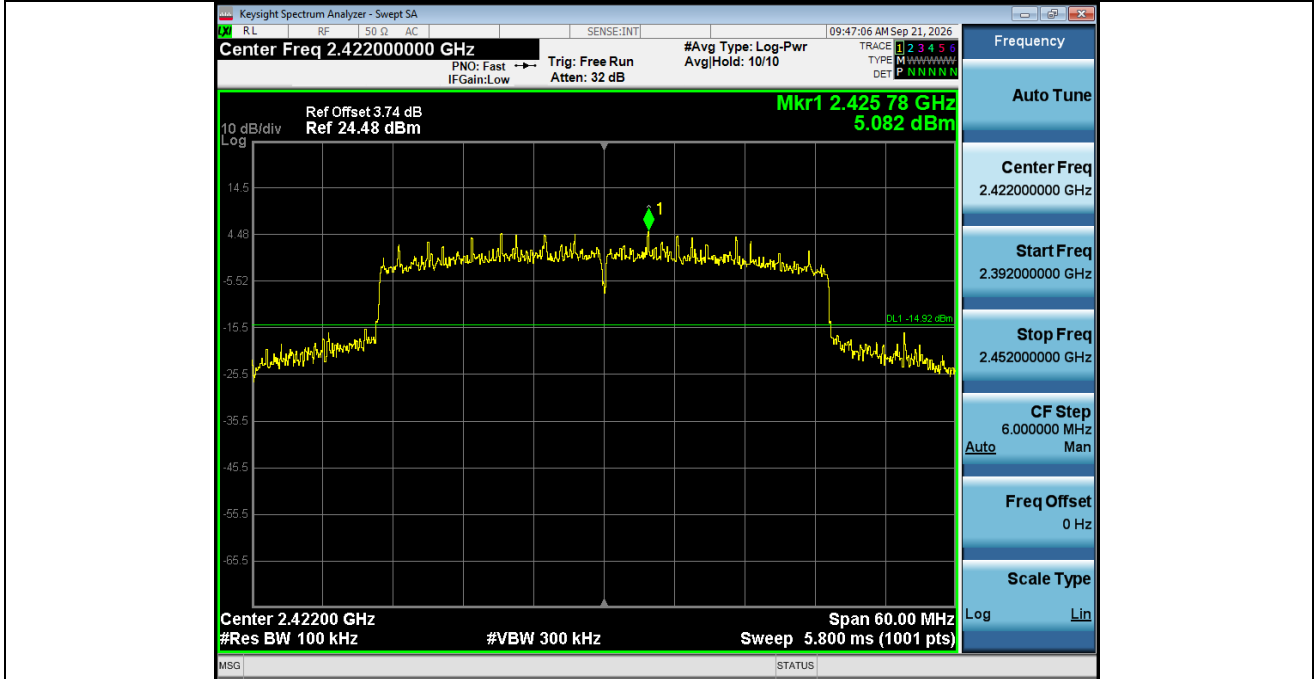


2 Bandedge NVNT ANT1 802 11ax(HE40) 2422

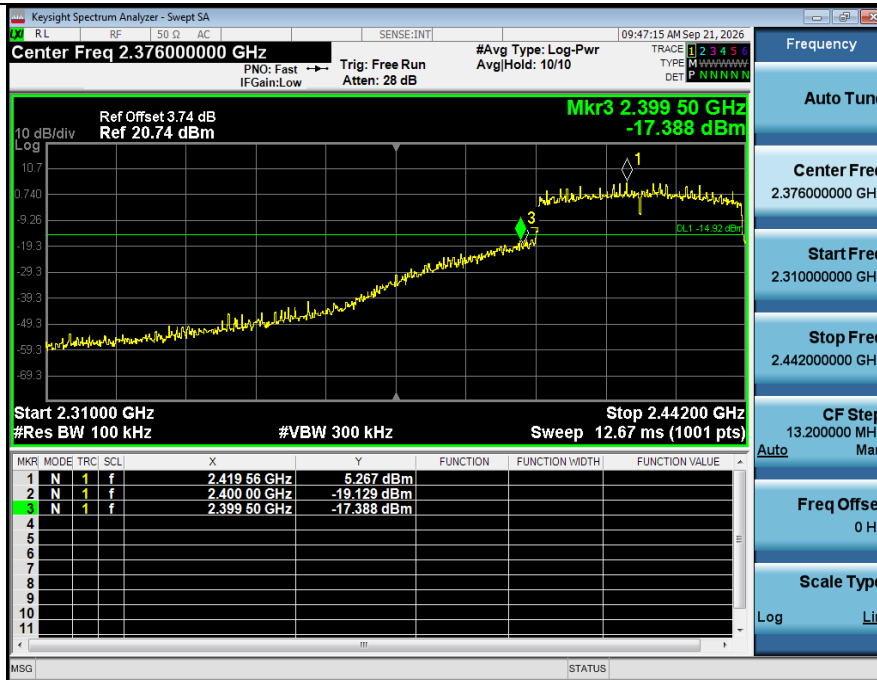

1 Reference Level NVNT ANT1_802_11ax(HE40)_2452



2_Bandedge_NVNT_ANT1_802_11ax(HE40)_2452

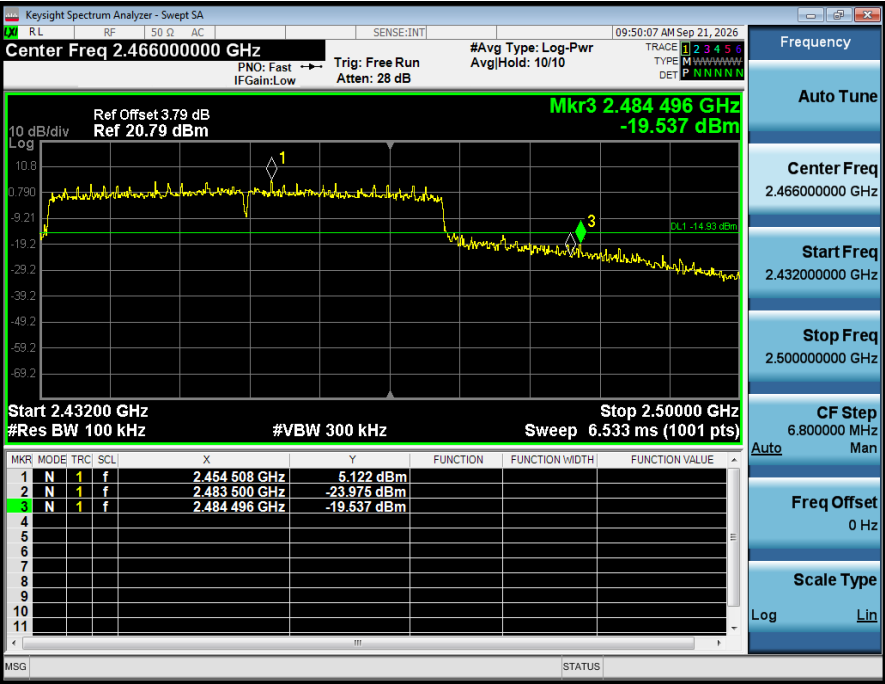


7. Spurious Emission

Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark_freq(MHz)	Ref_level(dBm)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412.00	4824.240	10.331	-33.802	-9.669	Pass
NVNT	ANT1	802.11b	2437.00	4874.180	9.575	-31.363	-10.425	Pass
NVNT	ANT1	802.11b	2462.00	4924.120	9.694	-31.202	-10.306	Pass
NVNT	ANT1	802.11g	2412.00	7238.839	7.951	-38.030	-12.049	Pass
NVNT	ANT1	802.11g	2437.00	7316.246	8.504	-35.514	-11.496	Pass
NVNT	ANT1	802.11g	2462.00	24992.509	7.253	-37.290	-12.747	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	24937.575	7.020	-38.404	-12.980	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	7316.246	8.387	-35.003	-11.613	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	7388.659	7.726	-36.671	-12.274	Pass
NVNT	ANT1	802.11ax(HE20)	2412.00	7228.851	8.168	-39.703	-11.832	Pass
NVNT	ANT1	802.11ax(HE20)	2437.00	7308.755	8.043	-35.759	-11.957	Pass
NVNT	ANT1	802.11ax(HE20)	2462.00	7388.659	8.766	-35.910	-11.234	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	4841.719	4.223	-43.071	-15.777	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	7323.737	5.851	-36.302	-14.149	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	2509.521	5.020	-35.233	-14.980	Pass
NVNT	ANT1	802.11ax(HE40)	2422.00	4841.719	4.991	-42.115	-15.009	Pass
NVNT	ANT1	802.11ax(HE40)	2437.00	7326.234	5.412	-40.515	-14.588	Pass
NVNT	ANT1	802.11ax(HE40)	2452.00	2502.030	5.068	-34.670	-14.932	Pass


1 Reference Level NVNT ANT1 802 11b 2412




2 Spurious Emission NVNT ANT1 802 11b 2412

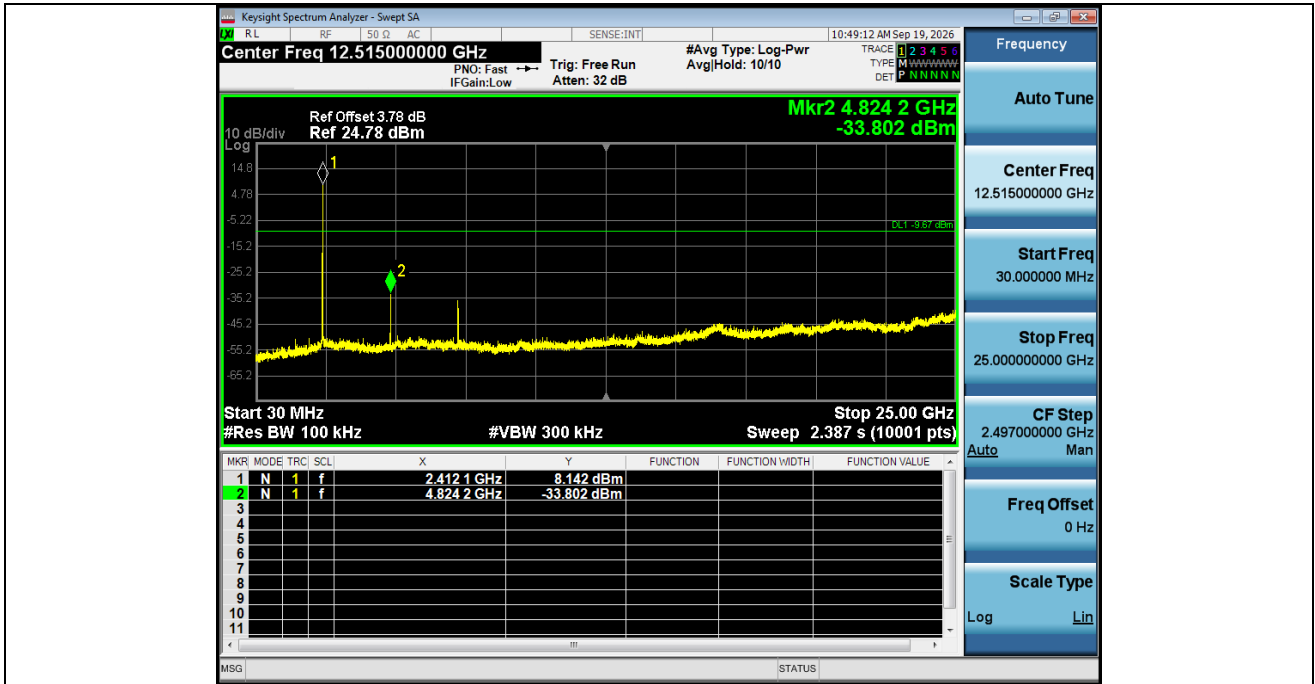


1 Reference Level NVNT ANT1 802 11b 2437

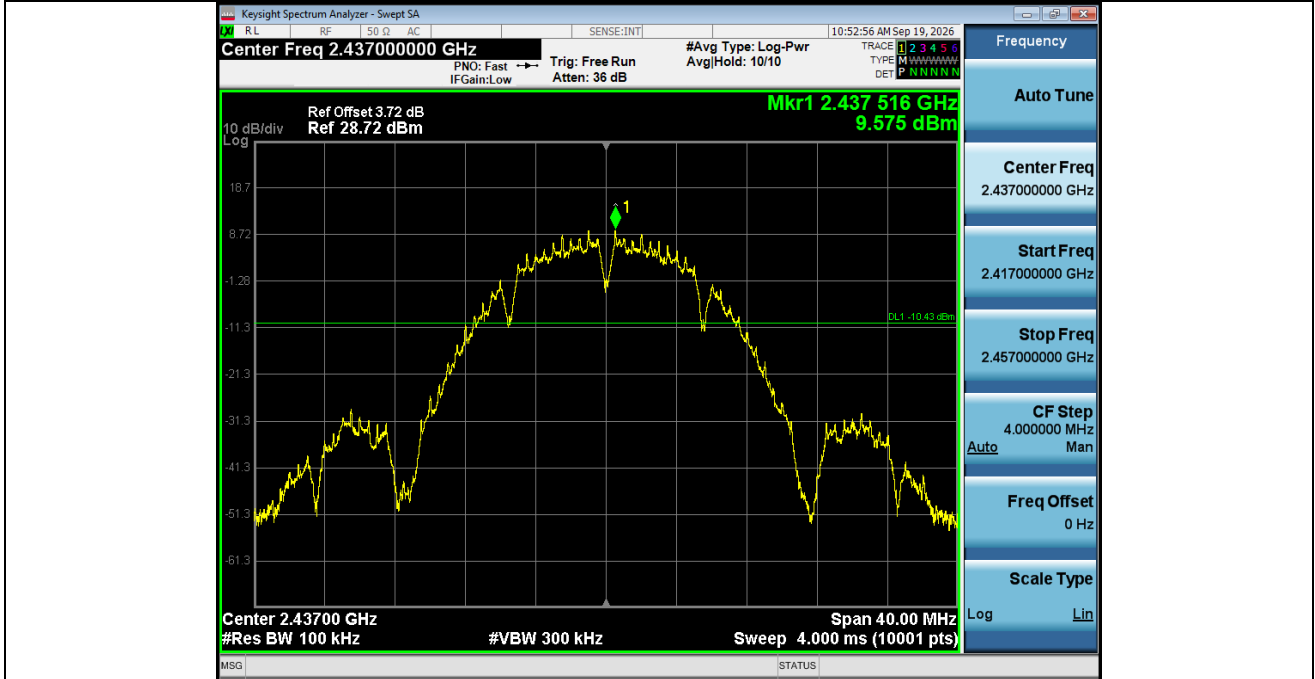


2 Spurious Emission NVNT ANT1 802 11b 2437

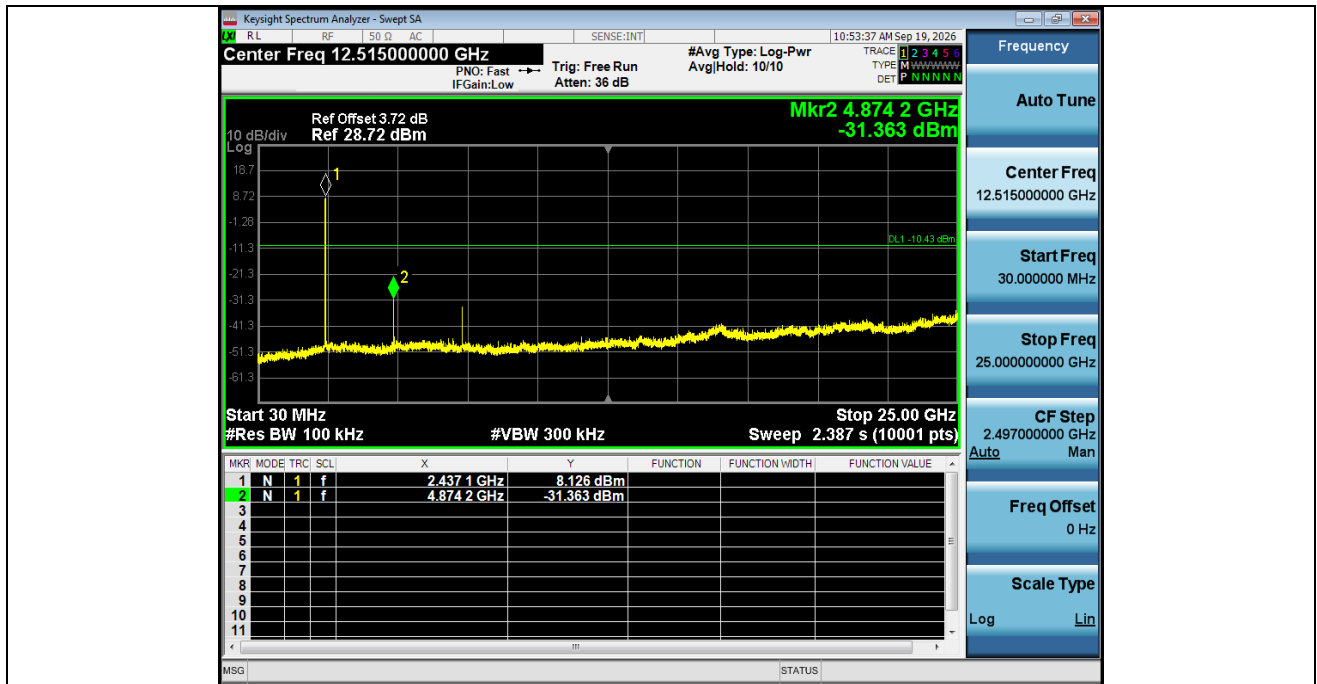


1 Reference Level NVNT ANT1 802 11b 2462

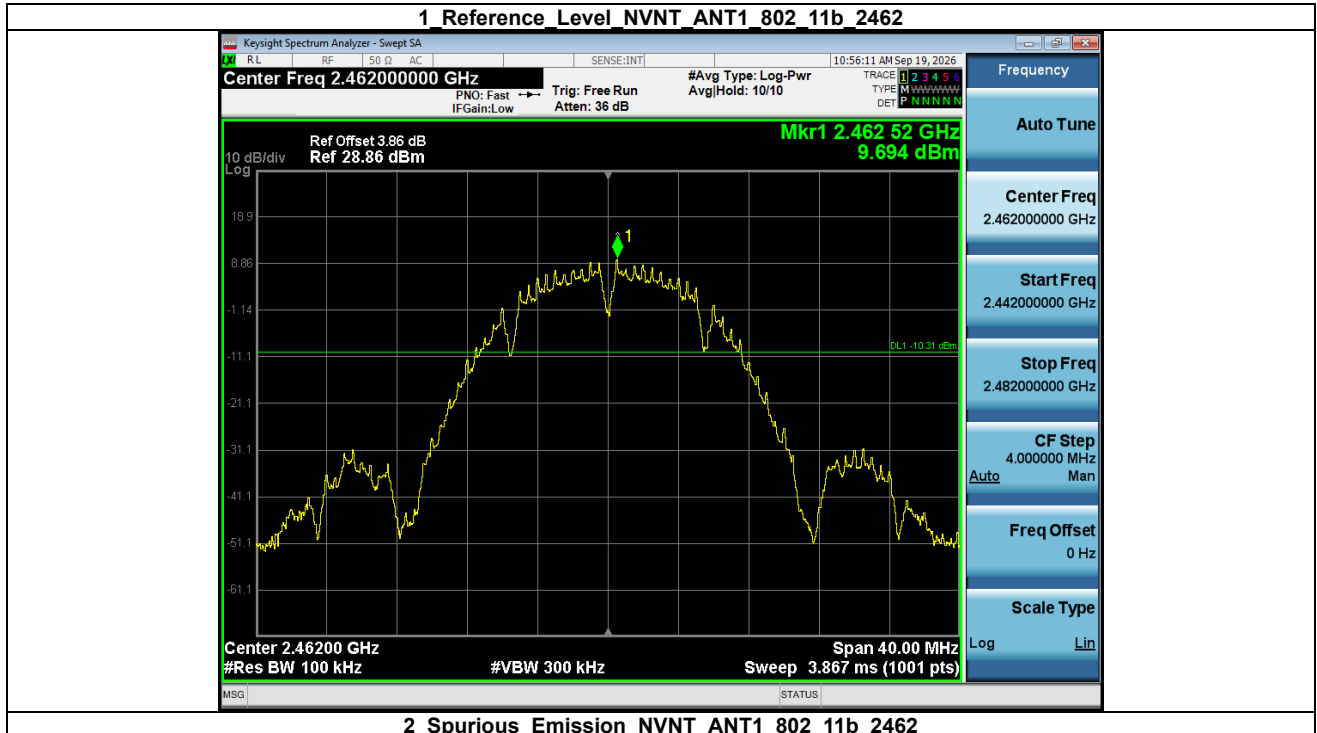


2 Spurious Emission NVNT ANT1 802 11b 2462

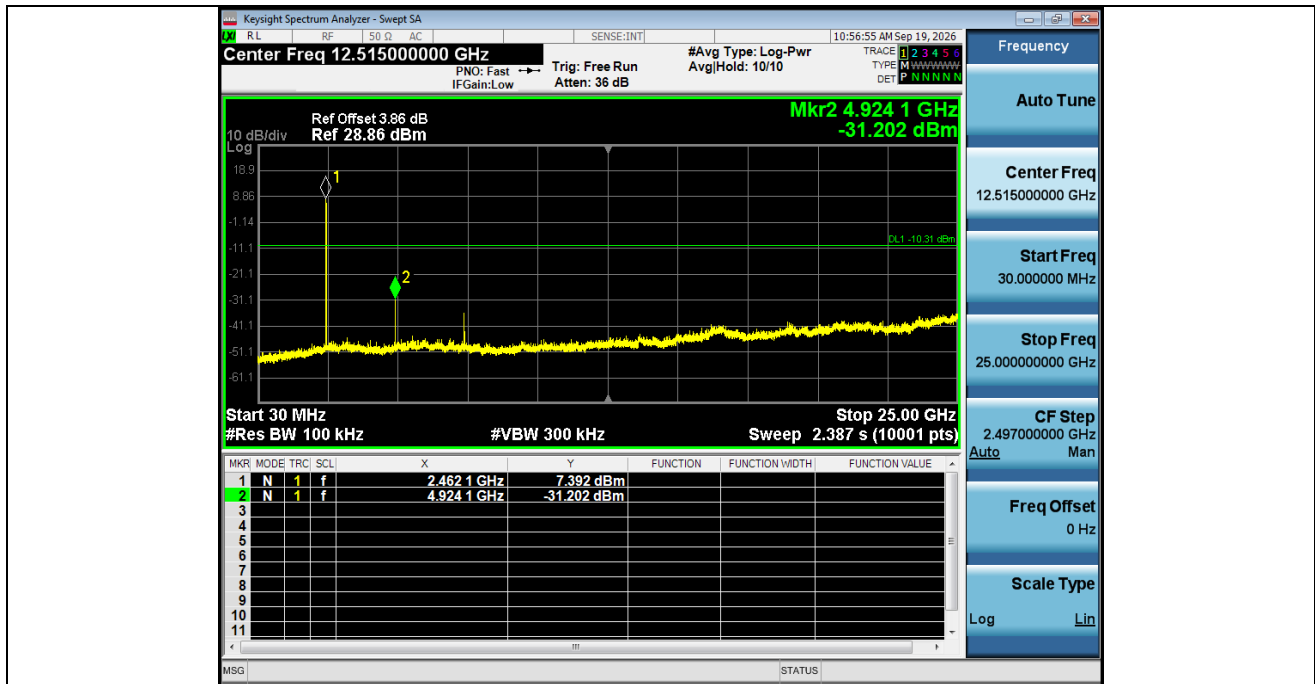


1 Reference Level NVNT ANT1 802 11g 2412

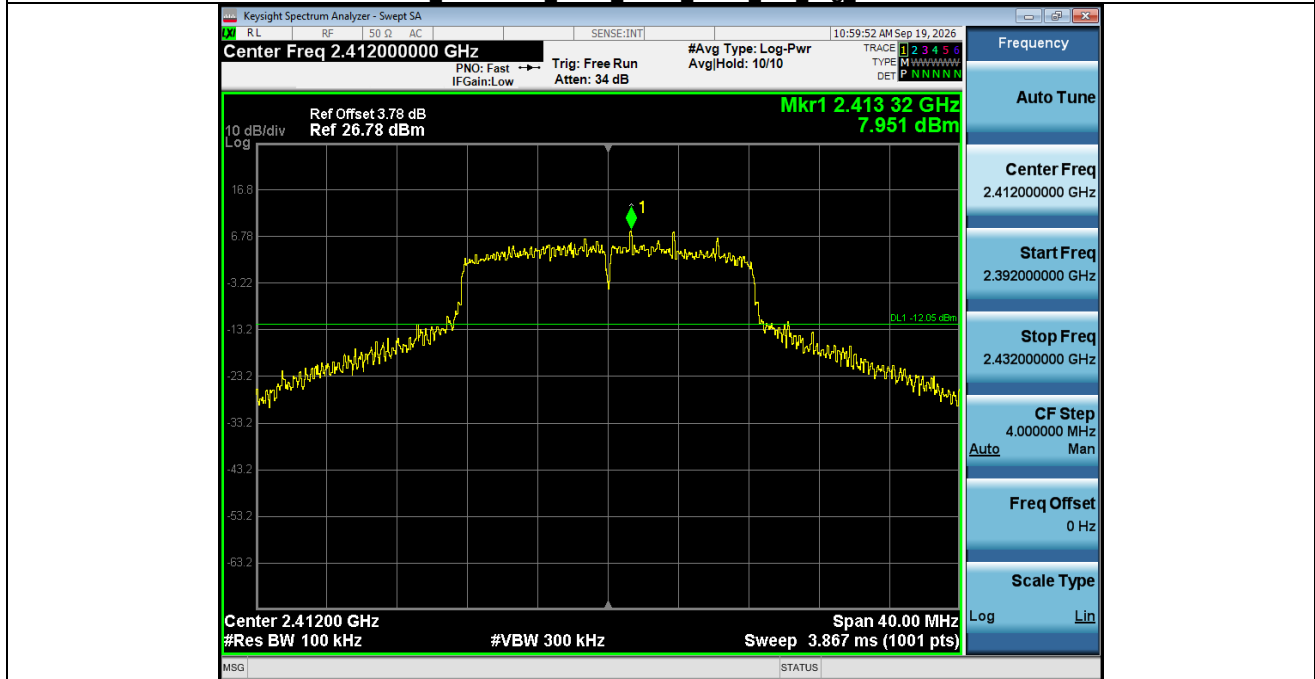


2 Spurious Emission NVNT ANT1 802 11g 2412

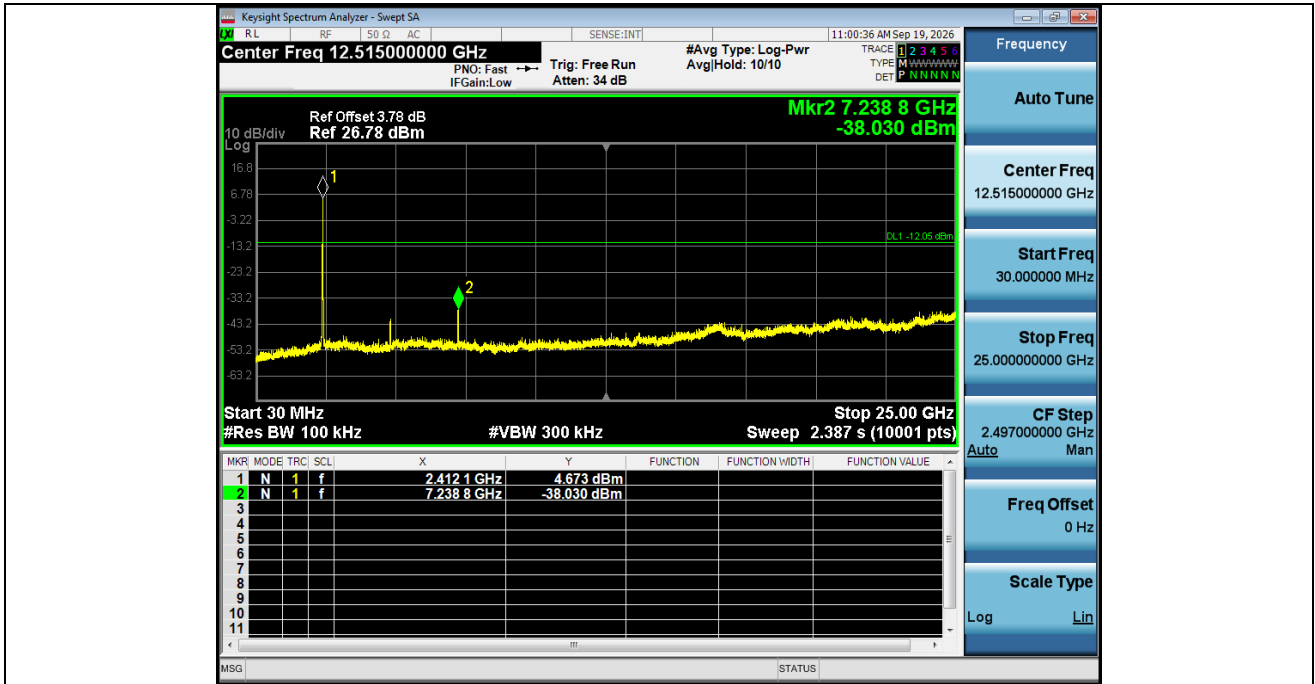


1 Reference Level NVNT ANT1 802 11g 2437

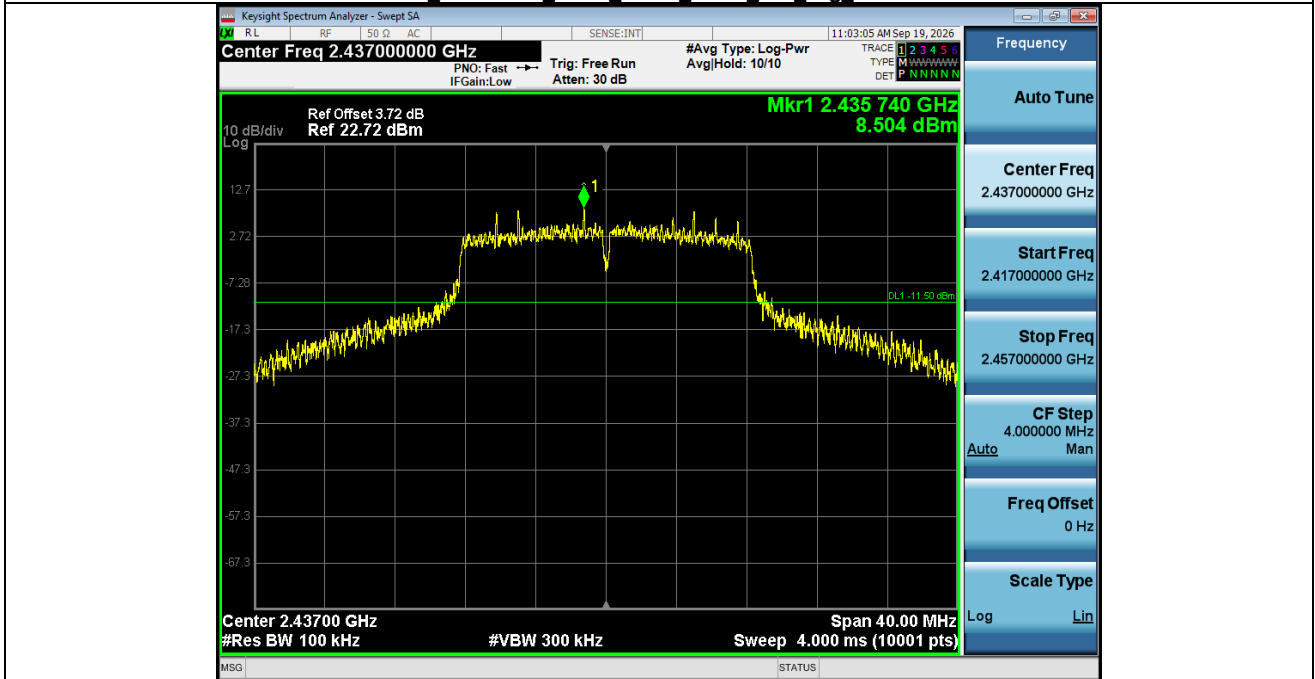


2 Spurious Emission NVNT ANT1 802 11g 2437

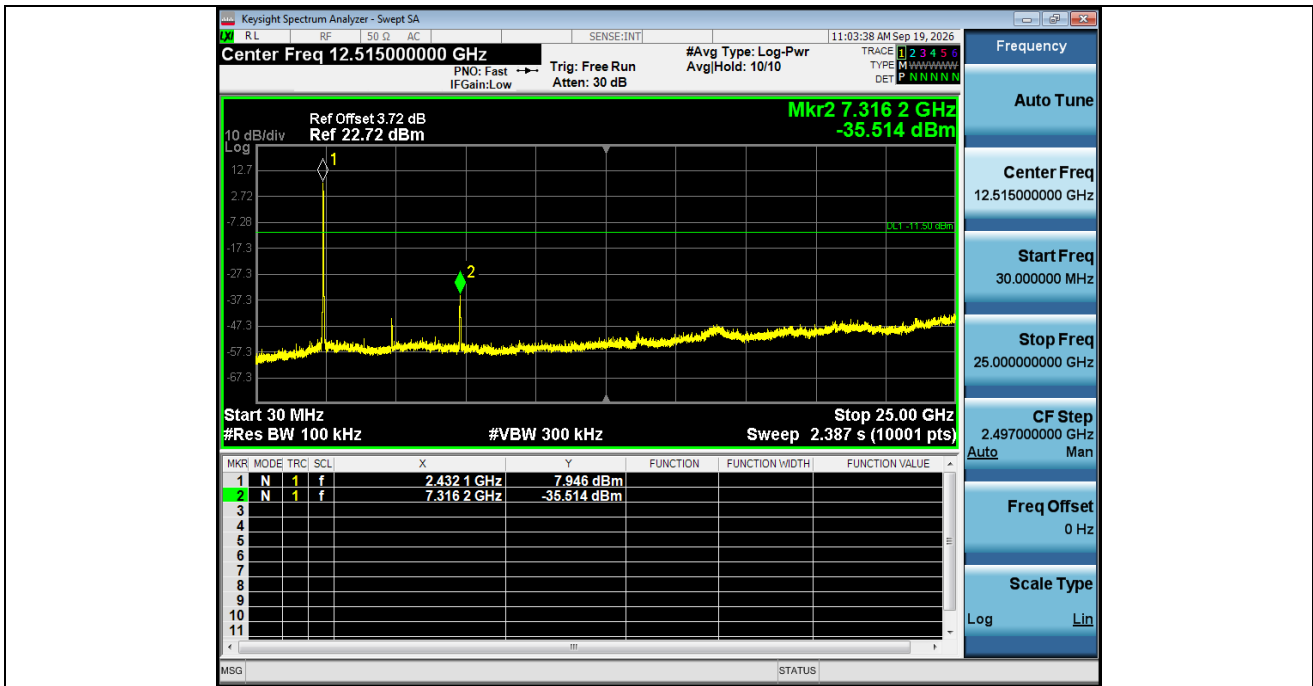


1 Reference Level NVNT ANT1 802 11g 2462

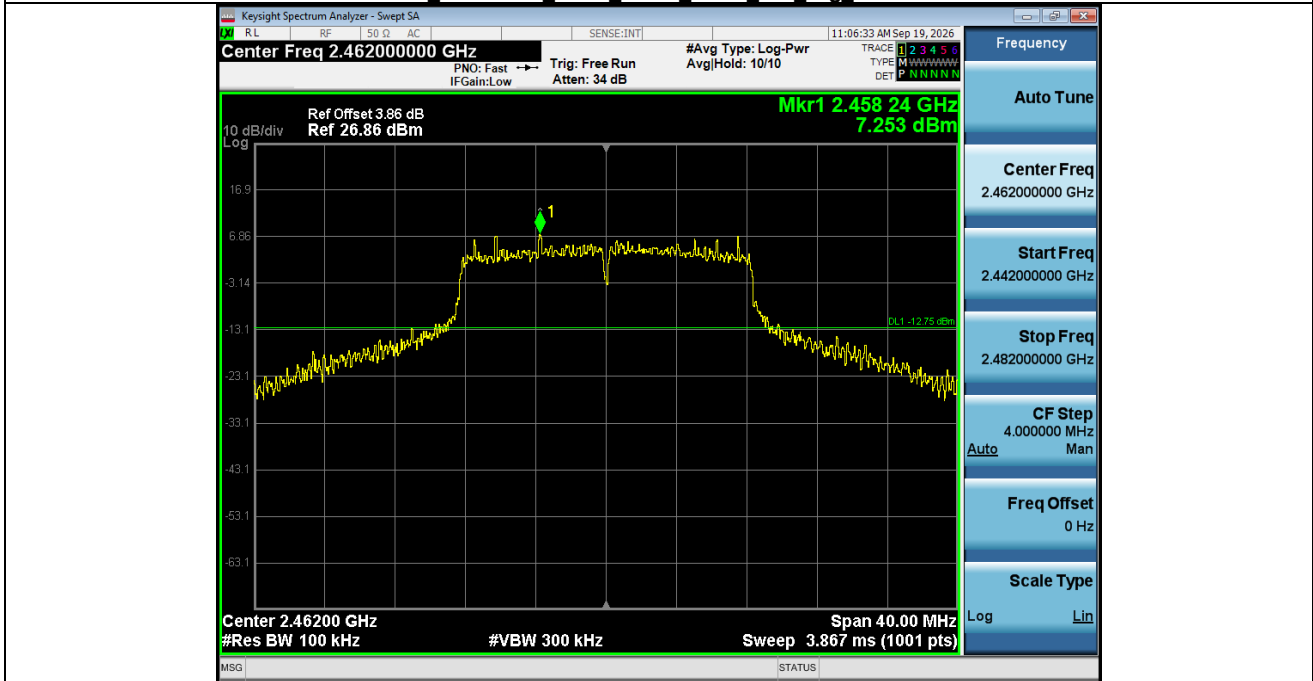


2 Spurious Emission NVNT ANT1 802 11g 2462

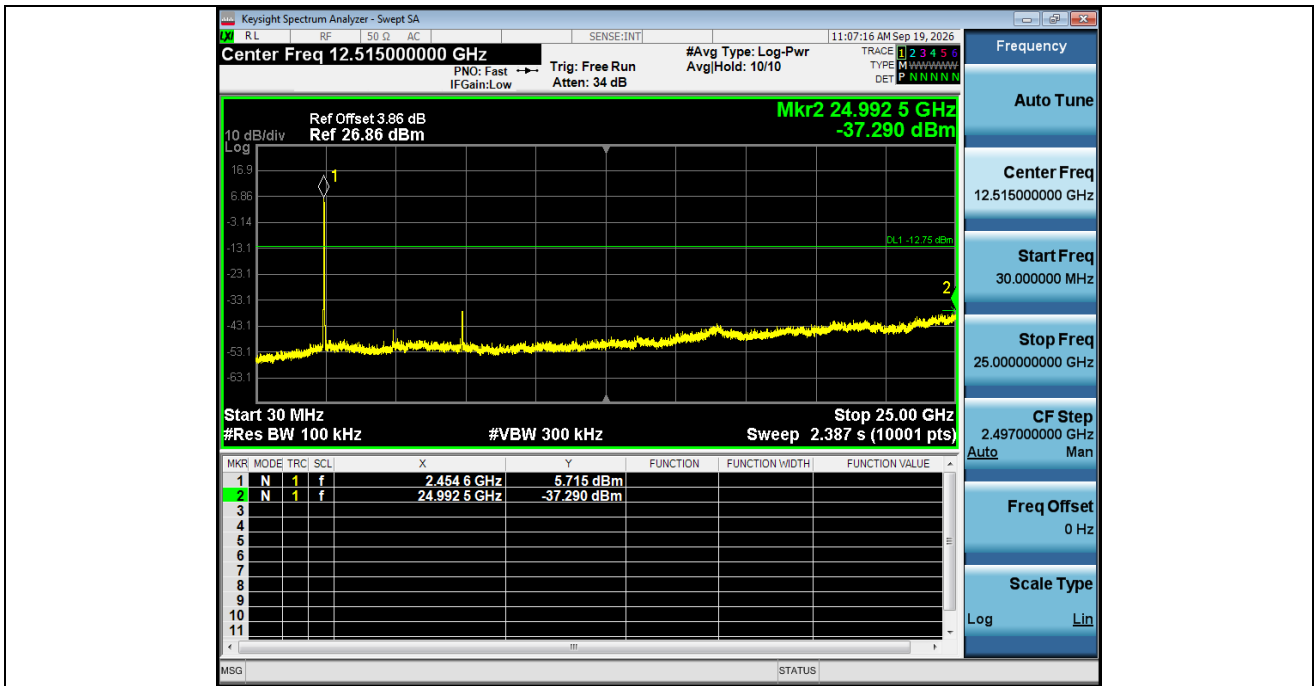


1 Reference Level NVNT ANT1 802 11n(HT20) 2412

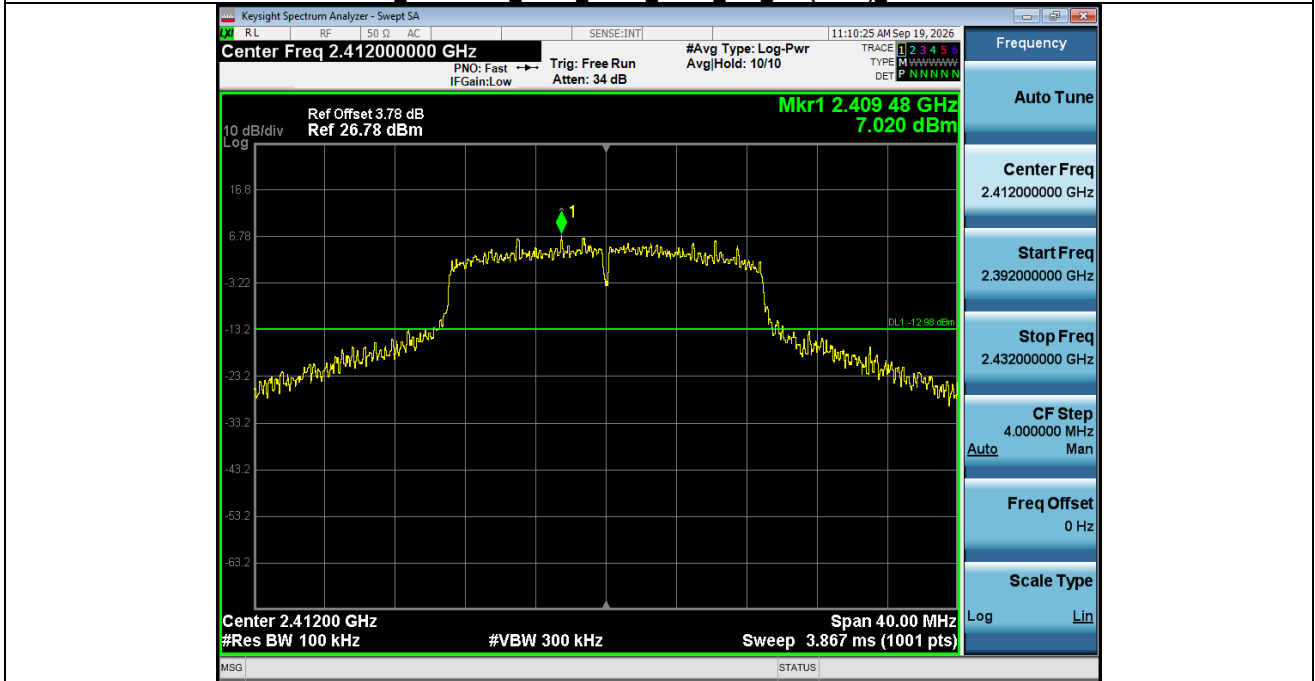


2 Spurious Emission NVNT ANT1 802 11n(HT20) 2412

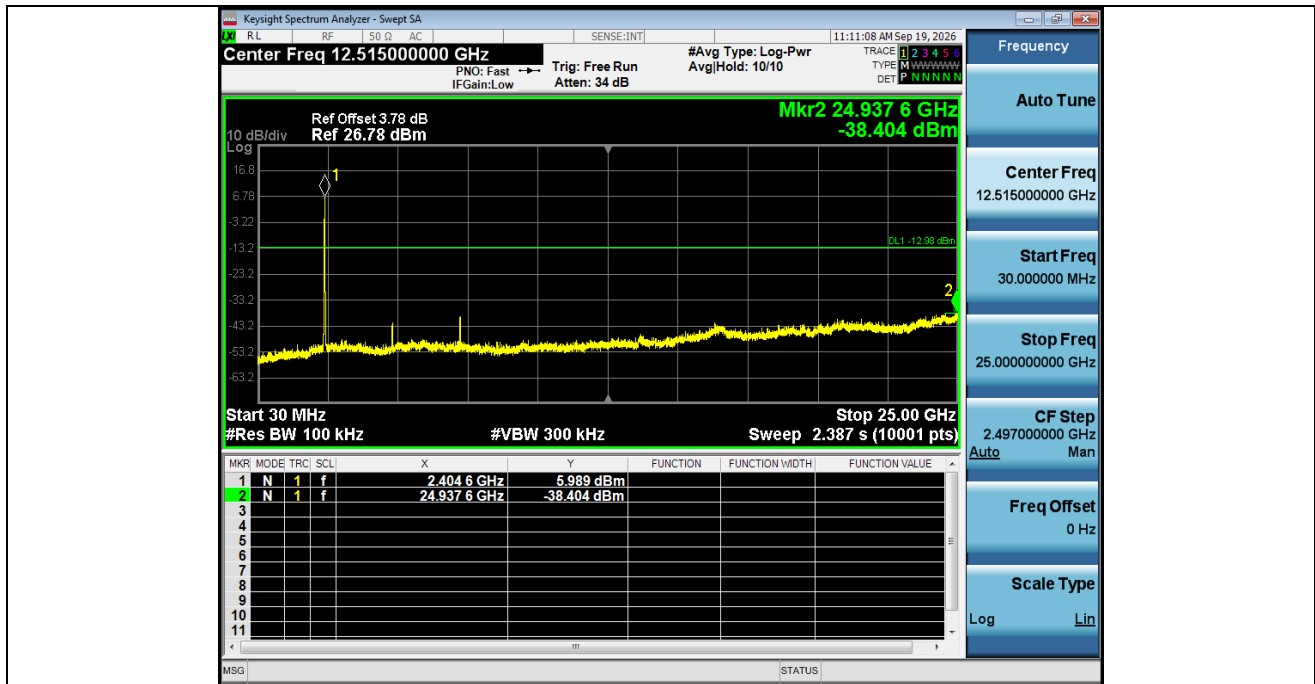

1 Reference Level NVNT ANT1 802 11n(HT20) 2437

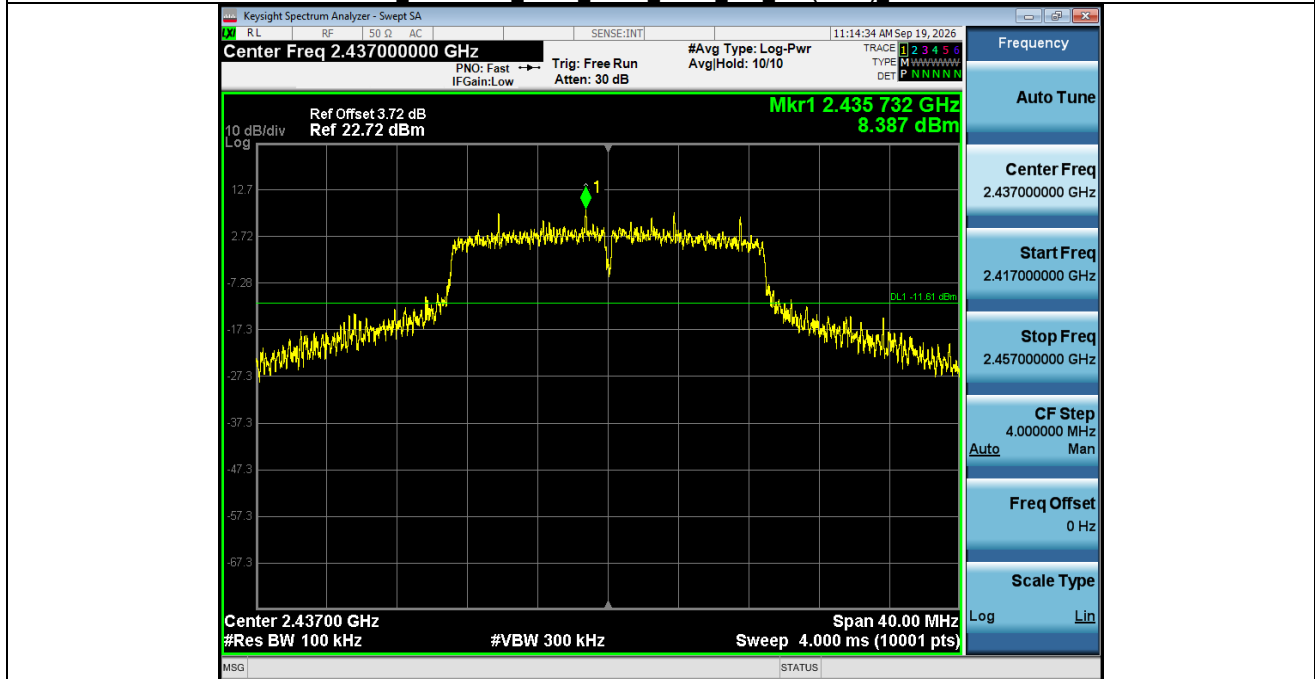


2 Spurious Emission NVNT ANT1 802 11n(HT20) 2437

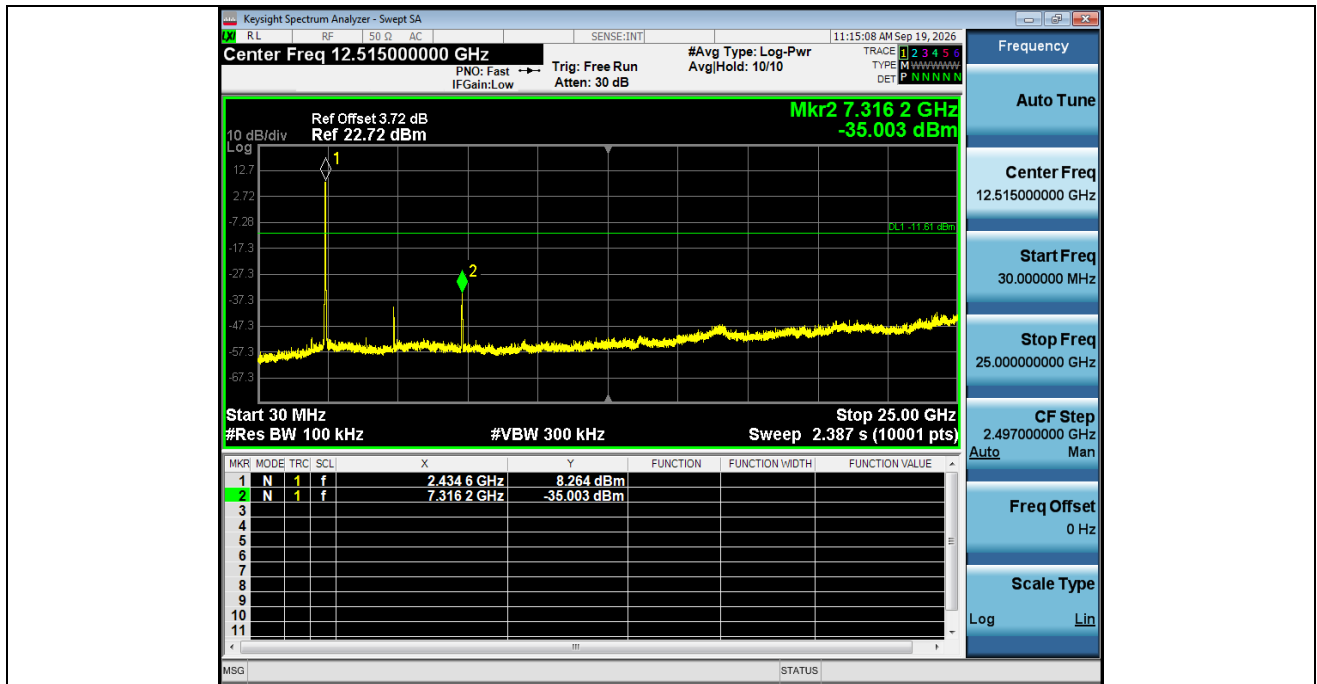


1 Reference Level NVNT ANT1 802 11n(HT20) 2462




2 Spurious Emission NVNT ANT1 802 11n(HT20) 2462

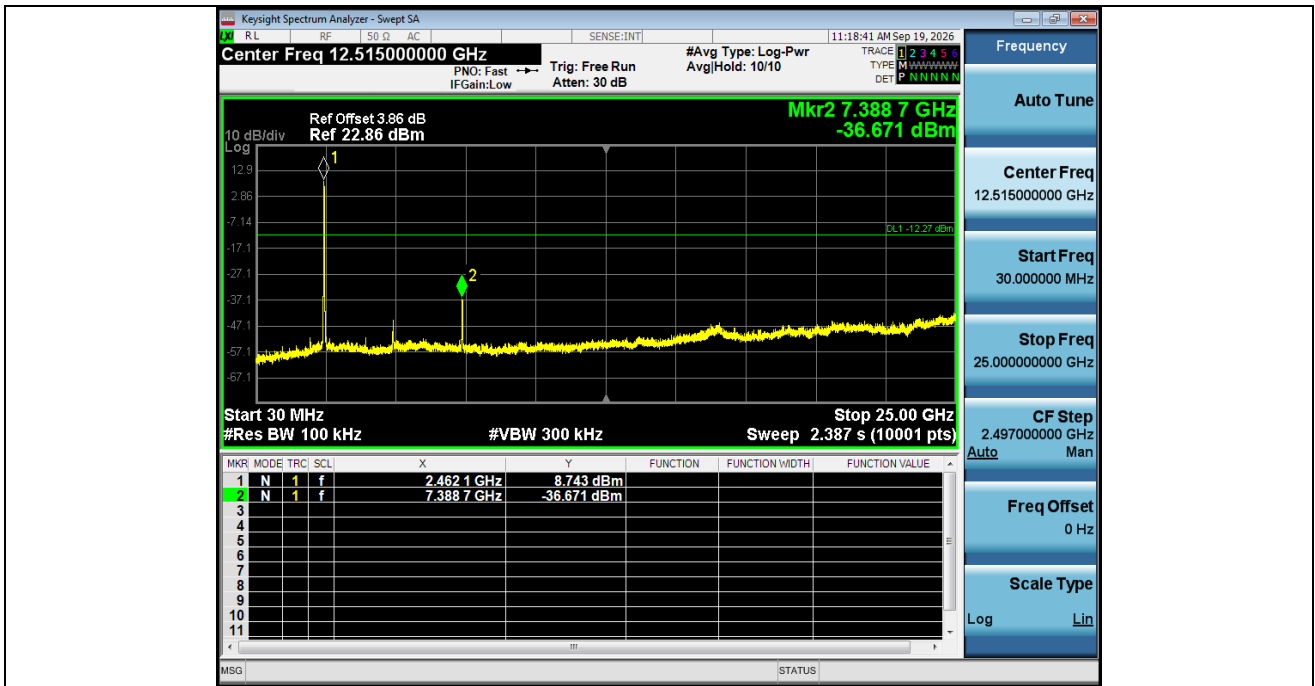


1 Reference Level NVNT ANT1 802 11ax(HE20) 2412

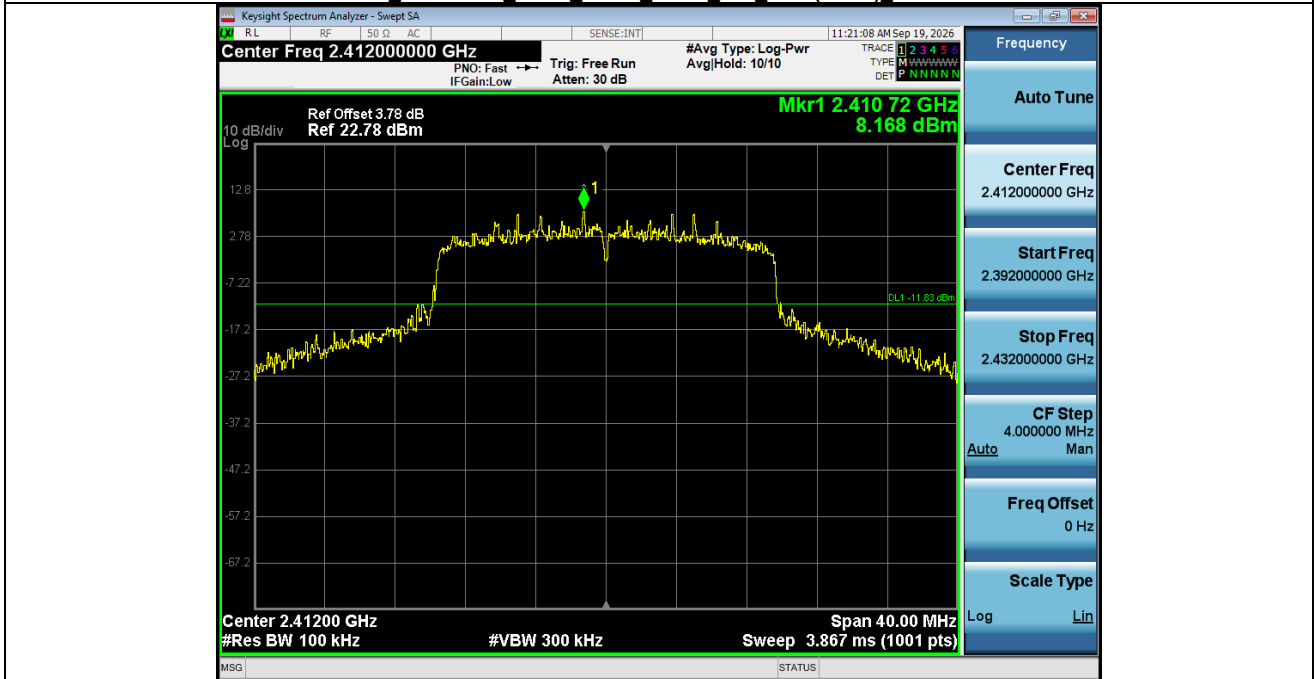


2 Spurious Emission NVNT ANT1 802 11ax(HE20) 2412

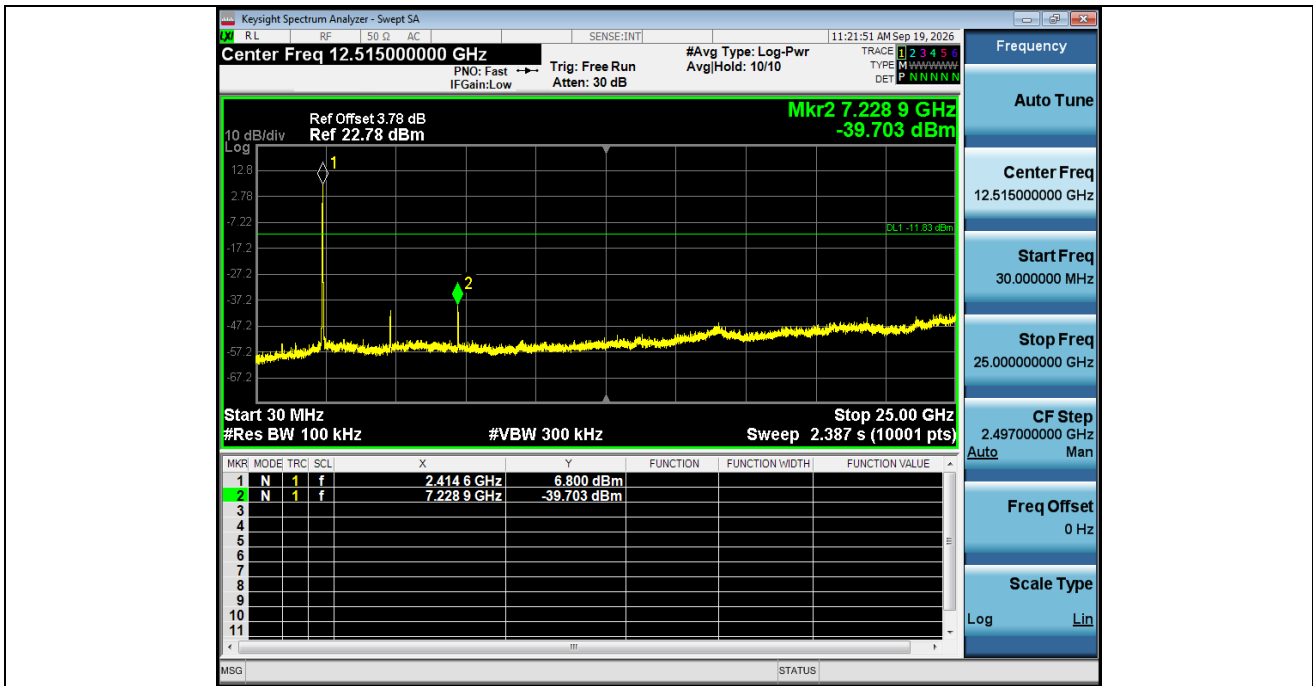


1 Reference Level NVNT ANT1 802 11ax(HE20) 2437

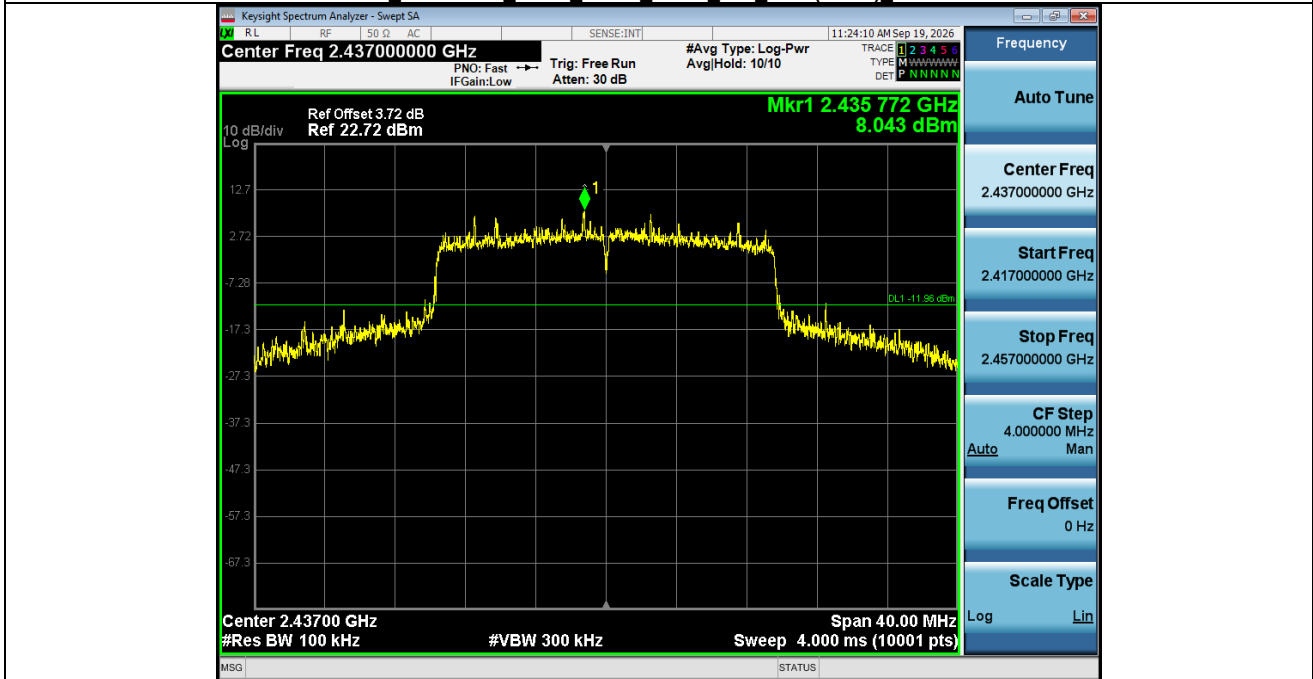


2 Spurious Emission NVNT ANT1 802 11ax(HE20) 2437

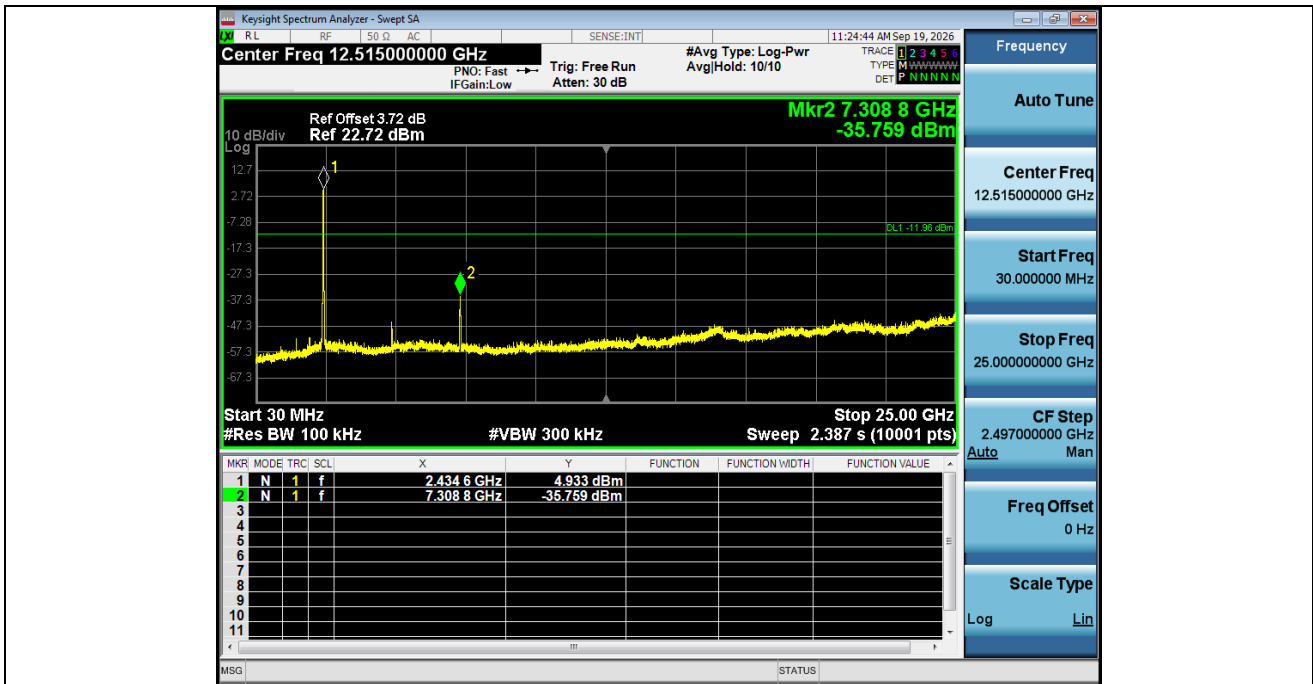


1 Reference Level NVNT ANT1 802 11ax(HE20) 2462

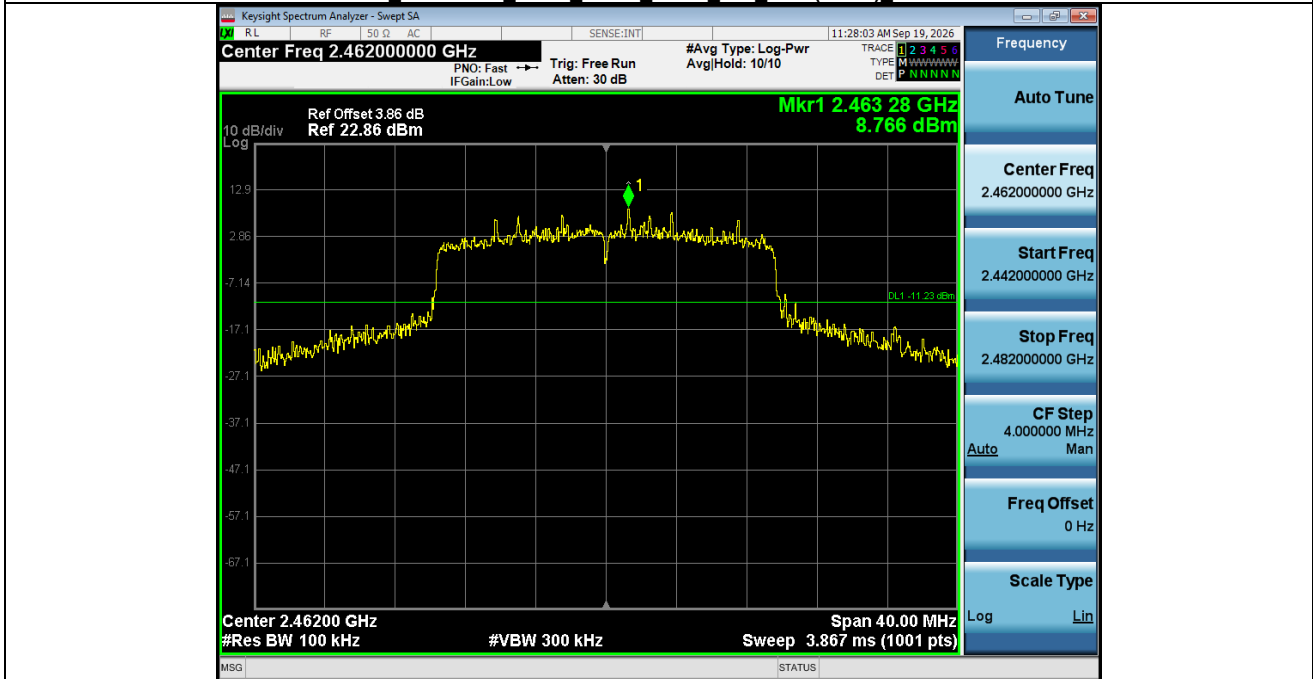


2 Spurious Emission NVNT ANT1 802 11ax(HE20) 2462

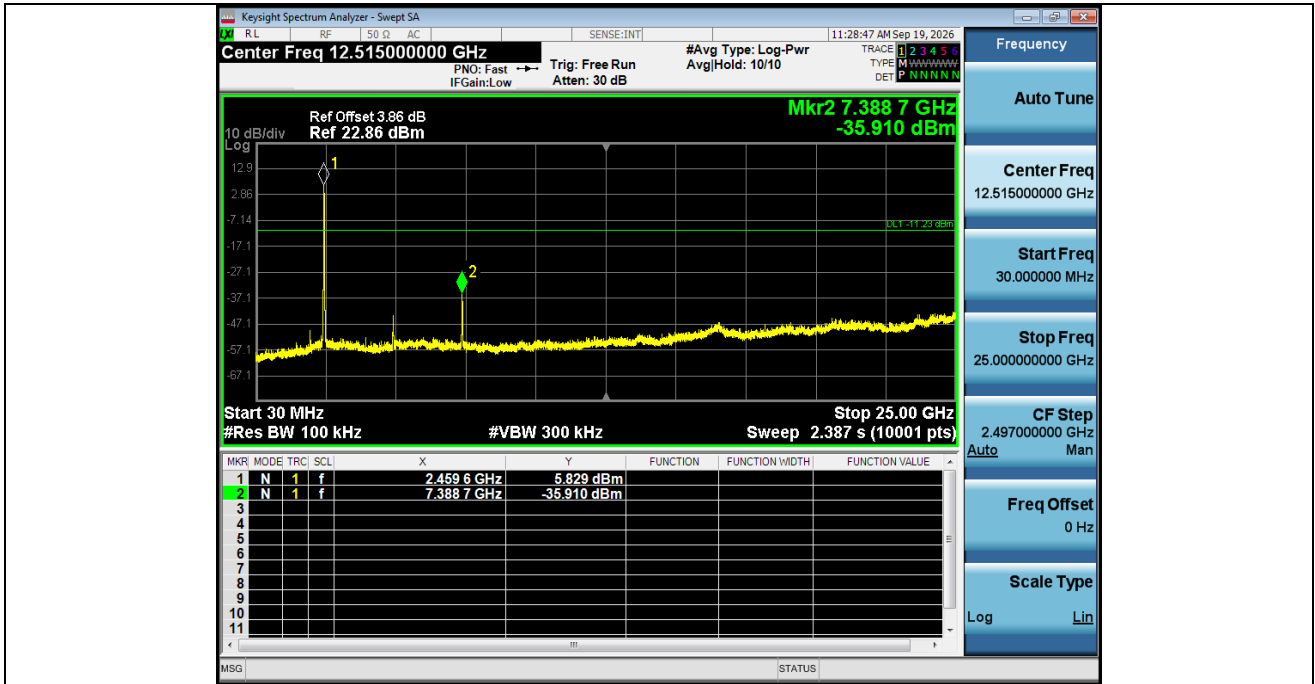


1 Reference Level NVNT ANT1 802 11n(HT40) 2422

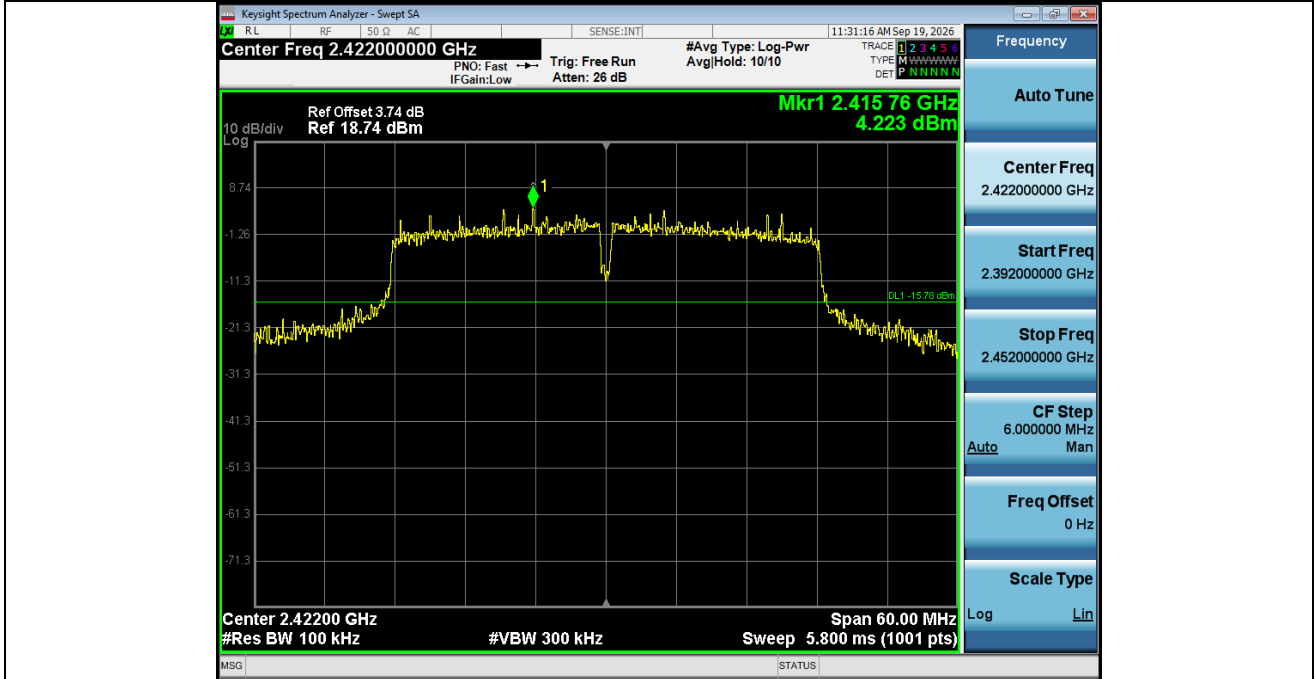


2 Spurious Emission NVNT ANT1 802 11n(HT40) 2422

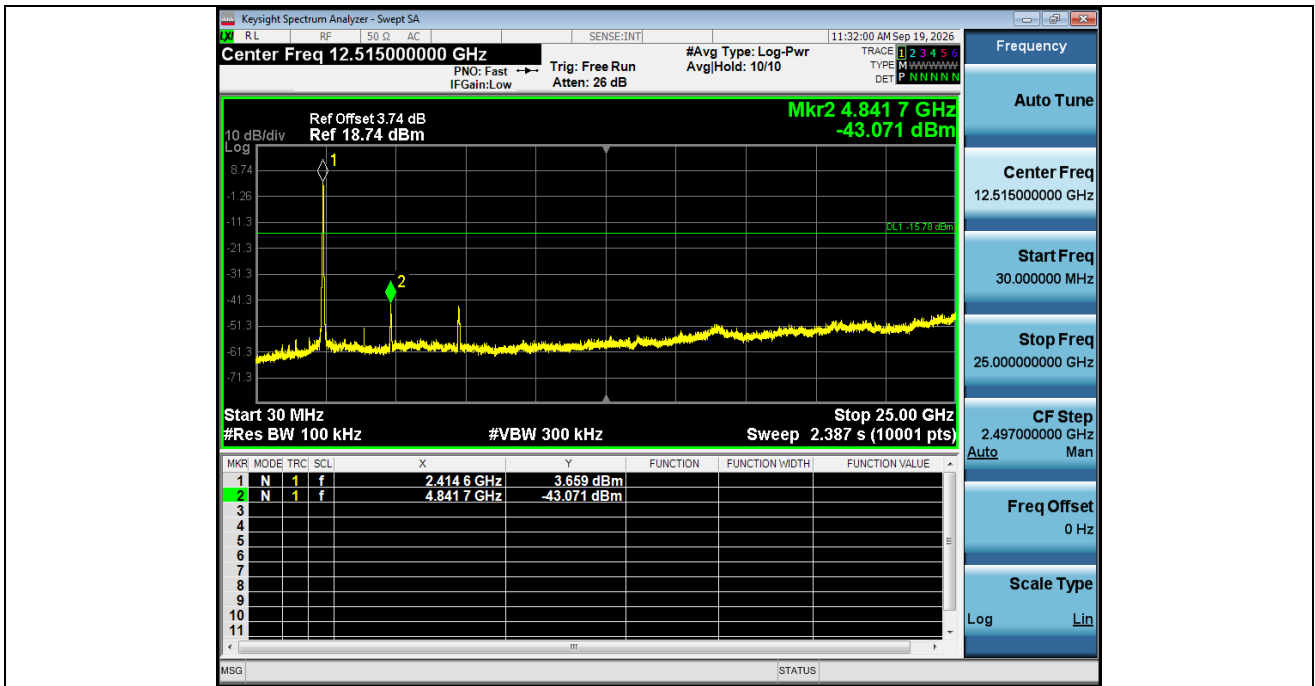


1 Reference Level NVNT ANT1 802 11n(HT40) 2437

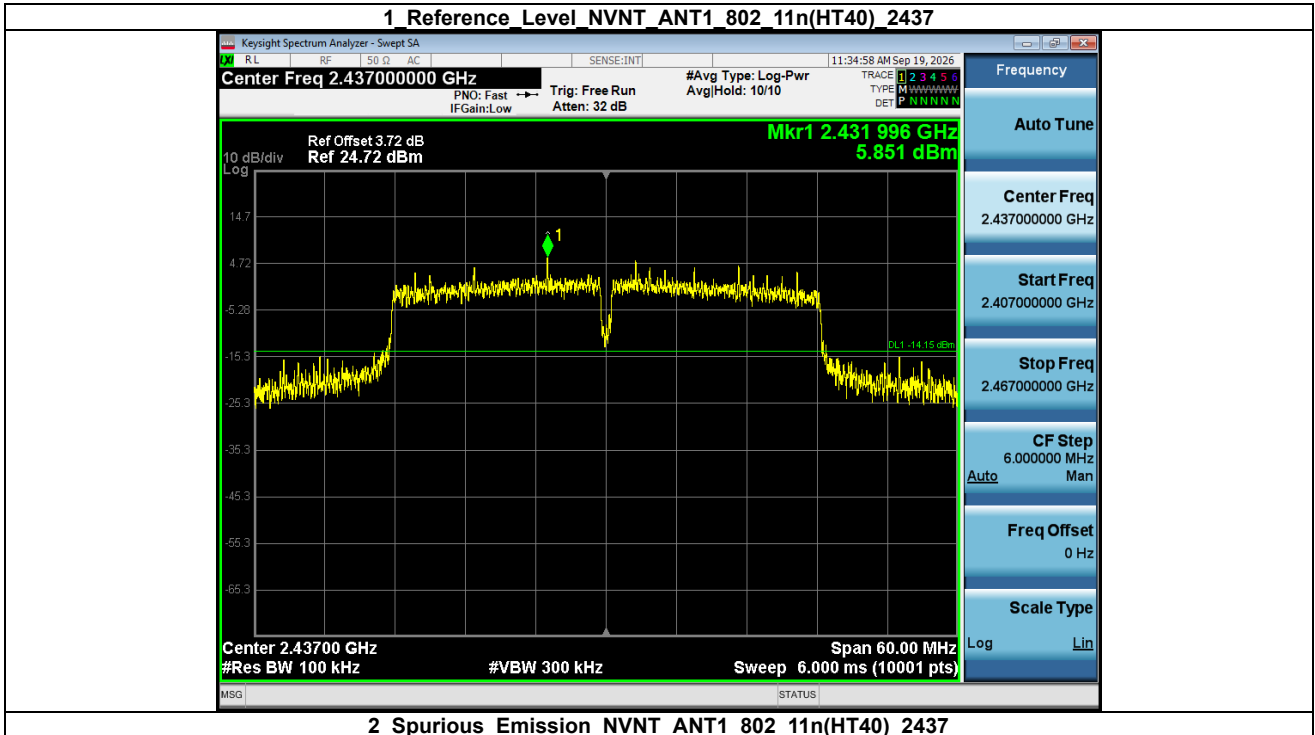


2 Spurious Emission NVNT ANT1 802 11n(HT40) 2437

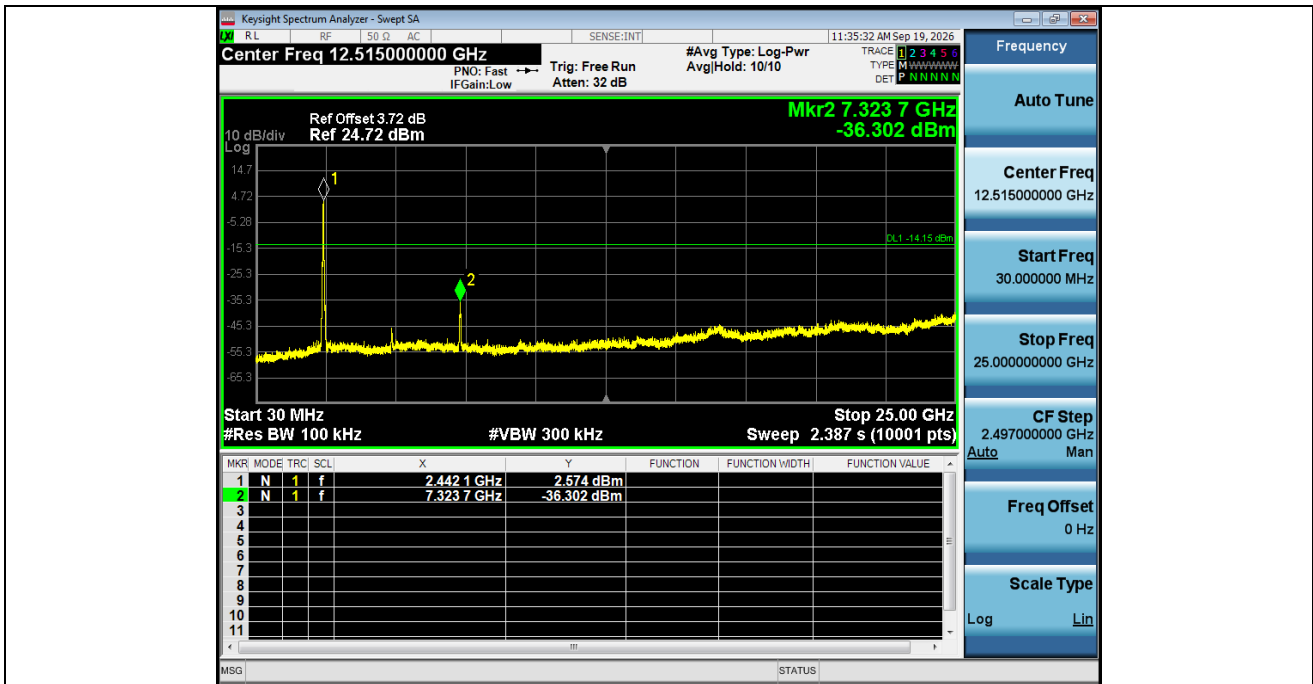


1 Reference Level NVNT ANT1 802 11n(HT40) 2452

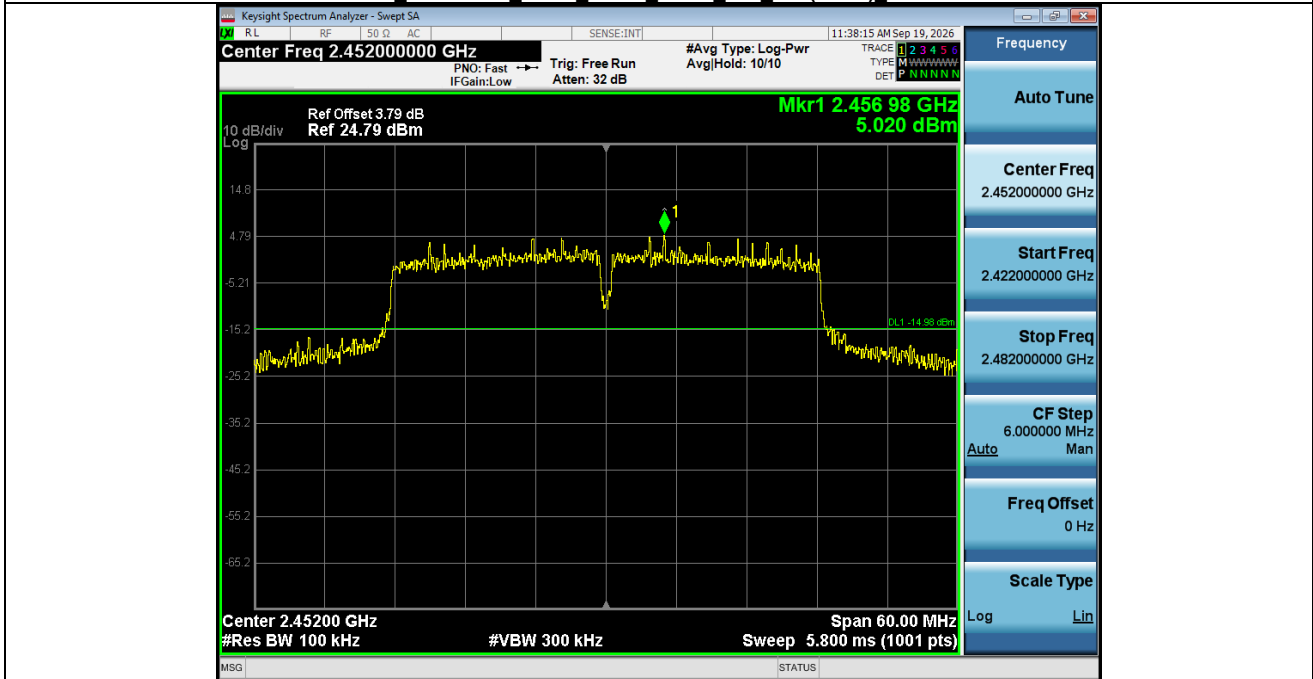


2 Spurious Emission NVNT ANT1 802 11n(HT40) 2452

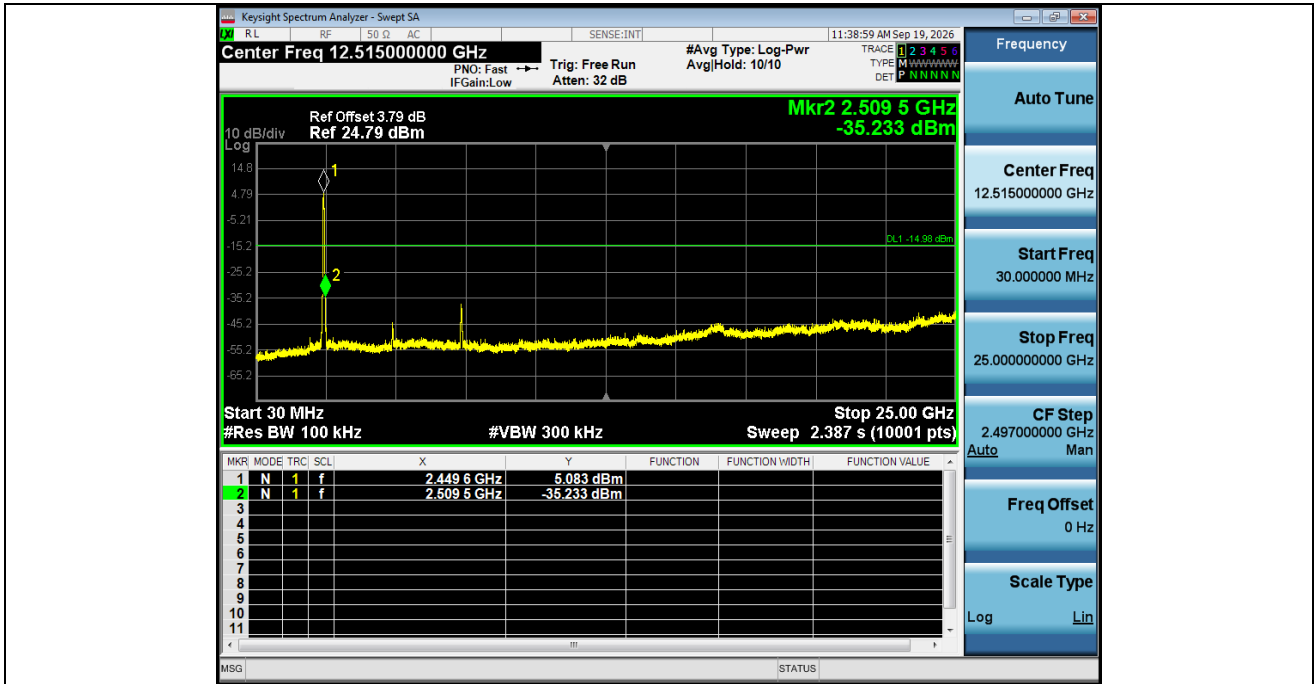


1 Reference Level NVNT ANT1 802 11ax(HE40) 2422

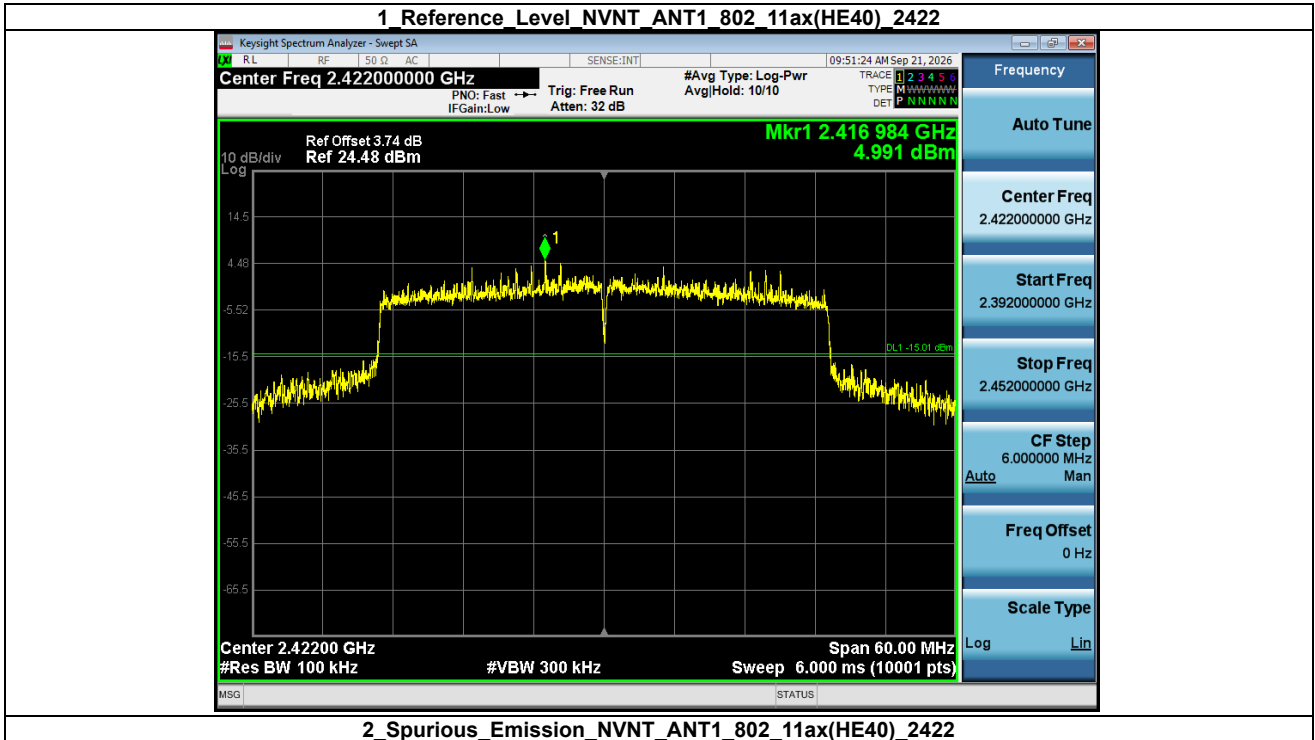


2 Spurious Emission NVNT ANT1 802 11ax(HE40) 2422

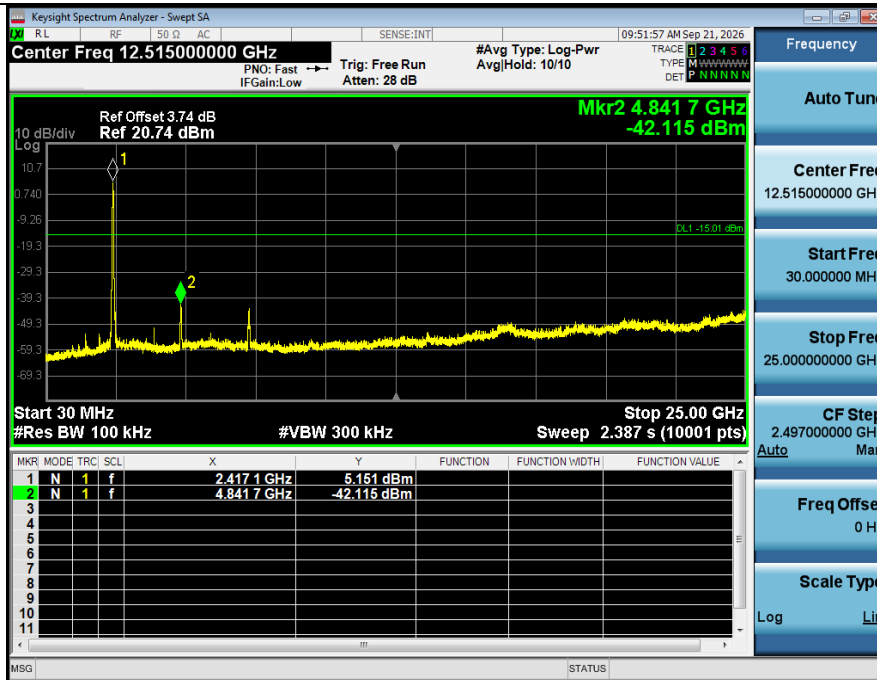

1 Reference Level NVNT ANT1_802_11ax(HE40)_2437

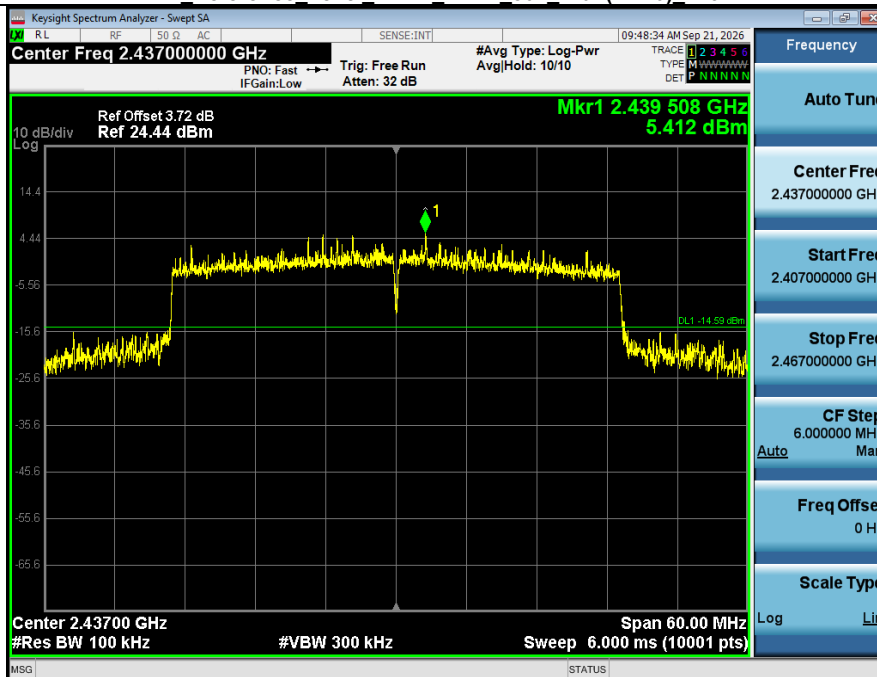

2 Spurious Emission NVNT ANT1_802_11ax(HE40)_2437

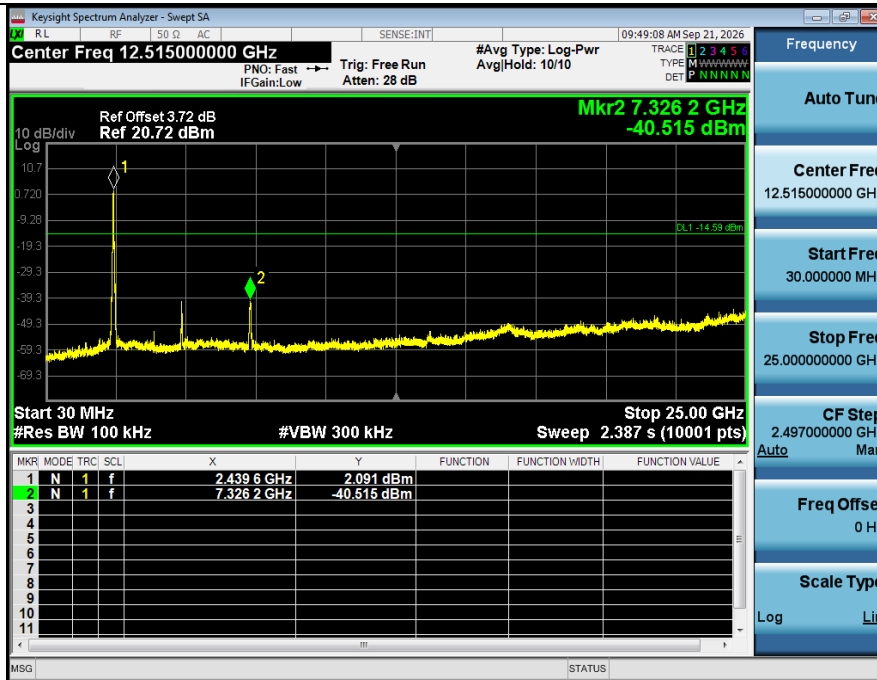

1 Reference Level NVNT ANT1_802_11ax(HE40)_2452



2 Spurious Emission NVNT ANT1_802_11ax(HE40)_2452

