

TEST REPORT

Product Name : WiFi module
Model Number : WXT09R2101
FCC ID : 2BN5S-2508A

Prepared for : REOLINK TECHNOLOGY PTE. LTD.
Address : 31 KAKI BUKIT ROAD 3, #06-02, TECHLINK, SINGAPORE 417818

Prepared by : EMTEK (SHENZHEN) CO., LTD.
Address : Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

Tel: (0755) 26954280
Fax: (0755) 26954282

Report Number : ENS2509120197W00504R
Date(s) of Tests : September 13, 2025 to October 9, 2025
Date of issue : October 12, 2025

1 TEST RESULT CERTIFICATION

Applicant : REOLINK TECHNOLOGY PTE. LTD.
Address : 31 KAKI BUKIT ROAD 3, #06-02, TECHLINK, SINGAPORE 417818
Manufacturer : REOLINK TECHNOLOGY PTE. LTD.
Address : 31 KAKI BUKIT ROAD 3, #06-02, TECHLINK, SINGAPORE 417818
EUT : WiFi module
Model Name : WXT09R2101
Trademark : N/A

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart E	PASS
IC RSS-GEN, Issue 5(04-2018)+A1(03-2019)+A2(02-2021) IC RSS-247 Issue 3(08-2023)	PASS

The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2, Part 15.407, IC RSS-247 Issue 3 and IC RSS-GEN, Issue 5.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : September 13, 2025 to October 9, 2025

Prepared by : 
Una Yu /Editor

Reviewer : 
Joe Xia/Supervisor

Approve & Authorized Signer : 
Lisa Wang/Manager



Modified History

Version	Report No.	Revision Date	Summary
Ver.1.0	ENS2509120197W00504R	/	Original Report



TABLE OF CONTENTS

1 TEST RESULT CERTIFICATION	2
2 EUT TECHNICAL DESCRIPTION	5
3 SUMMARY OF TEST RESULT	7
4 TEST METHODOLOGY	8
4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS	8
4.2 MEASUREMENT EQUIPMENT USED	8
4.3 DESCRIPTION OF TEST MODES.....	9
5 FACILITIES AND ACCREDITATIONS	13
5.1 FACILITIES	13
5.2 EQUIPMENT	13
5.3 LABORATORY ACCREDITATIONS AND LISTINGS	13
6 TEST SYSTEM UNCERTAINTY	14
7 SETUP OF EQUIPMENT UNDER TEST	15
7.1 RADIO FREQUENCY TEST SETUP	15
7.2 RADIO FREQUENCY TEST SETUP	15
7.3 CONDUCTED EMISSION TEST SETUP	17
7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	18
7.5 SUPPORT EQUIPMENT	18
8 TEST REQUIREMENTS	19
8.1 BANDWIDTH MEASUREMENT	19
8.2 MAXIMUM CONDUCTED OUTPUT POWER	219
8.3 MAXIMUM PEAK POWER DENSITY	314
8.4 UNDESIRABLE RADIATED SPURIOUS EMISSION	321
8.5 POWER LINE CONDUCTED EMISSIONS	435
8.6 ANTENNA APPLICATION	438
9 APPENDIX PHOTOGRAPHS OF EUT	439
10 APPENDIX PHOTOGRAPHS OF TEST SETUP	440

2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
Product:	WiFi module
Model Number:	WXT09R2101
Test Sample S/N:	N/A
Variant Number:	N/A
Wifi Type:	Wifi 5G with 5150MHz-5250MHz Band Wifi 5G with 5250MHz-5350MHz Band Wifi 5G with 5470MHz-5725MHz Band Wifi 5G with 5725MHz-5850MHz Band
WLAN Supported:	802.11a/n/ac/ax
Data Rate :	802.11a: 54/48/36/24/12/9/6Mbps 802.11n: MCS0-MCS7 802.11ac: MCS0-MCS9 802.11ax: MCS0-MCS11
Modulation:	☒ OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/n ☒ OFDM with BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM for 802.11ac/ax
Frequency Range:	UNII-1: 5150MHz-5250MHz Band 5180-5240MHz for 802.11a/n(HT20)/ac(VHT20)/ax(HE20) 5190-5230MHz for 802.11n(HT40)/ac(VHT40) /ax(HE40) 5210 MHz for 802.11ac(VHT80) /ax(HE80)
	UNII-2A: 5250MHz-5350MHz Band 5260-5320MHz for 802.11a/n(HT20)/ac(VHT20)/ax(HE20) 5270-5310MHz for 802.11n(HT40)/ac(VHT40)/ax(HE40) 5290 MHz for 802.11ac(VHT80) /ax(HE80)
	UNII-2C: 5470MHz-5725MHz Band 5500-5700MHz for 802.11a/n(HT20)/ac(VHT20)/ax(HE20) 5510-5670MHz for 802.11n(HT40)/ac(VHT40)/ax(HE40) 5530-5610MHz for 802.11ac(VHT80)/ax(HE80)
	UNII-3 with 5725MHz-5850MHz Band 5745-5825MHz for 802.11a/n(HT20)/ac(VHT20) /ax(HE20) 5755-5795MHz for 802.11n(HT40)/ac(VHT40)/ax(HE40) 5775MHz for 802.11ac(VHT80) /ax(HE80)
TPC Function:	Not Applicable
Antenna Port:	☒ Antenna port 1 ☒ Antenna port 2
Antenna Type:	Dipole Antenna
Antenna Gain:	2.55 dBi (Note: The antenna information is provided by the customers, which will have a certain impact on the test results.)

Power supply:	DC 5.0V
Software Version:	N/A
Hardware Version:	N/A
Note: 1.For more details, please refer to the User's manual of the EUT.	



3 SUMMARY OF TEST RESULT

FCC PartClause	IC Part Clause	Test Parameter	Verdict	Remark
15.407 (a) 15.407 (e) 2.1049	RSS-247, 6.2 RSS-Gen 6.7	99% , 6dB and 26dB Bandwidth	PASS	
15.407 (a)	RSS-247, 6.2	Maximum Conducted Output Power	PASS	
15.407 (a)	RSS-247, 6.2	PeakPower Spectral Density	PASS	
15.407 (b) 15.209 15.205	RSS-247, 6.2 RSS-Gen 8.9 RSS-Gen 8.10 RSS-Gen 6.13	RadiatedSpurious Emission	PASS	
15.207	RSS-Gen 8.8	Power Line Conducted Emission	PASS	
15.407(a) 15.203	RSS-Gen 6.8	Antenna Application	PASS	
NOTE1:N/A (Not Applicable) NOTE2:According to FCC OET KDB 789033, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.				

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for **FCC ID:2BN5S-2508A** filing to comply with Section 15.407 of the FCC Part 15, Subpart C Rules.

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart E

IC RSS-GEN, Issue 5(04-2018)+A1(03-2019)+A2(02-2021)

IC RSS-247 Issue 3(08-2023)

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 789033 D2 General UNII Test Procedures New Rules v02r01

4.2 MEASUREMENT EQUIPMENT USED

Conducted Emission Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESCI	101384	2025/5/9	1Year
AMN	Rohde & Schwarz	ENV216	101161	2025/5/9	1Year

For Spurious Emissions Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESU 26	100154	2025/5/9	1Year
Pre-Amplifier	Lunar EM	LNA30M3G-25	J10100000070	2025/5/9	1Year
Bilog Antenna	Schwarzbeck	VULB9163	661	2025/5/18	2 Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1177	2025/5/17	2 Year
Pre-Amplifier	SKET	LNPA_0118G-45	SK2019051801	2025/5/9	1Year
Loop Antenna	Schwarzbeck	FMZB1519	1519-012	2025/5/13	2 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	2025/5/9	1Year
Horn antenna	Schwarzbeck	BBHA9170	9170-399	2025/5/13	2 Year
Coaxial Cable	TIMES	NmNm-7-C15702	N/A	2025/5/9	1Year
Coaxial Cable	TIMES	HF290-NMSM-6.5M	N/A	2025/5/9	1Year
Coaxial Cable	TIMES	LMR-240 N-N	N/A	2025/5/9	1Year

For other test items:

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Signal Analyzer	Agilent	N9010A	MY53470879	2025/5/10	1Year
Vector Signal Generator	Agilent	N5182B	MY53050878	2025/5/10	1Year
Analog Signal Generator	Agilent	N5171B	MY53050553	2025/5/10	1Year
RF Control Unit(Power Meter)	Tonscend	JS0806-2	\	2025/5/10	1Year
Temperature&Humidity Chamber	ESPEC	EL-02KA	12107166	2025/5/10	1Year

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11a: 54 Mbps; 802.11n(HT20): MCS0; 802.11ac(VHT20): MCS0; 802.11n(HT40): MCS0; 802.11ac(VHT40): MCS0; 802.11ac(VHT80): MCS0;) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

☒ Wifi 5G with U-NII - 1

Frequency and Channel list for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220		
40	5200	48	5240		

Frequency and Channel list for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230		

Frequency and Channel list for 802.11ac(VHT80)/ 802.11ax(HE80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	-	-	-	-

Test Frequency and Channel for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5200	48	5240

Test Frequency and channel for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	N/A	N/A	46	5230

Test Frequency and channels for 802.11ac(VHT80)/ 802.11ax(HE80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	-	-	-	-

☒ Wifi 5G with U-NII -2A

Frequency and Channel list 802.11a, 802.11n (HT20), 802.11ac (VHT20) , 802.11ax (HE20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300		
56	5280	64	5320		

Frequency and Channel list for 802.11n (HT40), 802.11ac (VHT40) , 802.11ax (HE40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
54	5270				
62	5310				

Frequency and Channels list for 802.11ac(VHT80)/ 802.11ax(HE80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
58	5290	-	-	-	-

Test Frequency and Channel for 802.11a, 802.11n (HT20), 802.11ac (VHT20) , 802.11ax (HE20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	56	5280	64	5320

Test Frequency and channel for 802.11n (HT40), 802.11ac (VHT40) , 802.11ax (HE40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
54	5270	N/A	N/A	62	5310

Test Frequency and channels for 802.11ac(VHT80)/ 802.11ax(HE80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
58	5290	-	-	-	-

☒ Wifi 5G with U-NII -2C

Frequency and Channel list for 802.11a, 802.11n (HT20), 802.11ac (VHT20) , 802.11ax (HE20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	116	5580	132	5660
104	5520	120	5600	136	5680
108	5540	124	5620	140	5700
112	5560	128	5640		

Frequency and Channel list for 802.11n (HT40), 802.11ac (VHT40) , 802.11ax (HE40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
102	5510	118	5590	134	5670
110	5550	126	5630		

Frequency and Channels list for 802.11ac(VHT80)/ 802.11ax(HE80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
106	5530	122	5610	-	-

Test Frequency and Channel for 802.11a, 802.11n (HT20), 802.11ac (VHT20) , 802.11ax (HE20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	116	5580	140	5700

Test Frequency and channel for 802.11n (HT40), 802.11ac (VHT40) , 802.11ax (HE40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
102	5510	110	5550	134	5670

Test Frequency and channels for 802.11ac(VHT80)/ 802.11ax(HE80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
106	5530	122	5610	-	-

☒ Wifi 5G with U-NII -3

Frequency and Channel list for 802.11a, 802.11n (HT20), 802.11ac (VHT20) , 802.11ax (HE20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825
153	5765	161	5805		

Frequency and Channel list for 802.11n (HT40), 802.11ac (VHT40) , 802.11ax (HE40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
---------	-----------------	---------	-----------------	---------	-----------------

151	5755	159	5795		
-----	------	-----	------	--	--

Frequency and Channels list for 802.11ac(VHT80)/ 802.11ax(HE80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775	-	-	-	-

Test Frequency and Channel for 802.11a, 802.11n (HT20), 802.11ac (VHT20) , 802.11ax (HE20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825

Test Frequency and channel for 802.11n (HT40), 802.11ac (VHT40) , 802.11ax (HE40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	N/A	N/A	159	5795

Test Frequency and channels for 802.11ac(VHT80)/ 802.11ax(HE80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775	-	-	-	-

Multi-antenna correlation:

☐	Transmit Signals are Correlated
	Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi
☐	All Transmit Signals are Completely Uncorrelated
	Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N_{ANT}]$ dBi

Directional gain = $10 \log [(10^{1.68/20} + 10^{1.86/20})^2/2]$ dBi= / dBi

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at:

EMTEK (Shenzhen) Co., Ltd.

Building 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description
EMC Lab.

Accredited by CNAS

The Certificate Registration Number is L2291

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017)

Accredited by FCC

Designation Number: CN1204

Test Firm Registration Number: 882943

Accredited by A2LA

The Certificate Number is 4321.01

Accredited by Industry Canada

The Conformity Assessment Body Identifier is CN0008

Name of Firm

: EMTEK (SHENZHEN) CO., LTD.

Site Location

: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Test Parameter	Measurement Uncertainty
Frequency error	$\pm 20\text{Hz}$
Occupied Bandwidth	$\pm 0.5\text{KHz}$
Transmitter output power	$\pm 0.6\text{dB}$
Conducted spurious emissions	$\pm 3.2\text{dB}$
Radiated spurious emissions	$\pm 4.5\text{dB}$
Temperature	$\pm 1.2^{\circ}\text{C}$
Humidity	$\pm 3\%$
DC voltages	$\pm 0.25\text{V}$
Time	$\pm 1\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:


The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:


(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

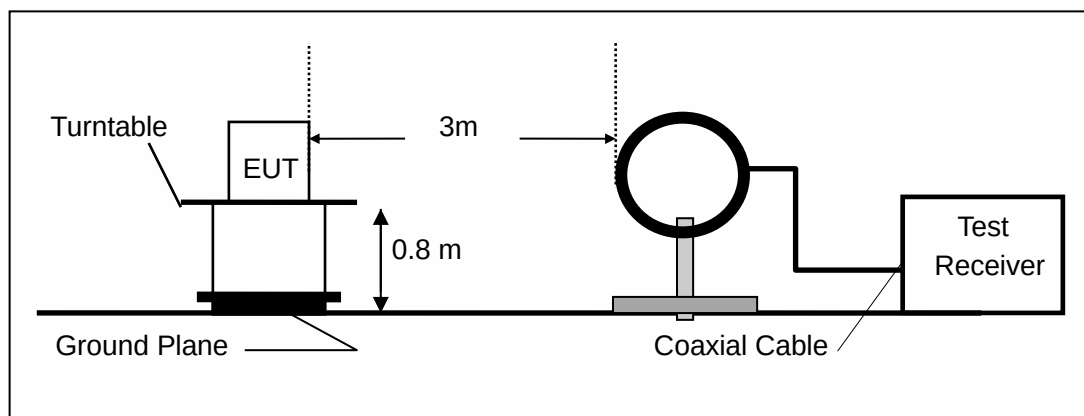

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

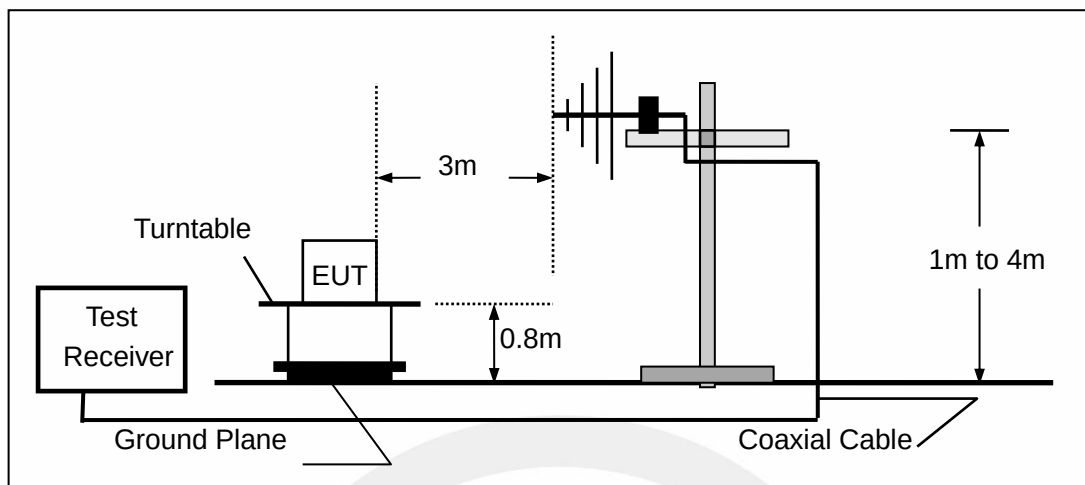

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

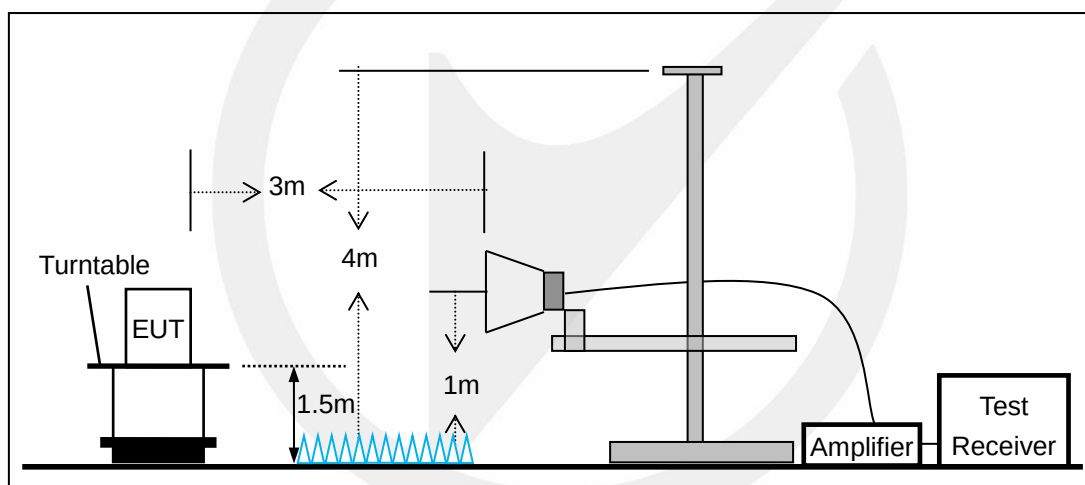


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

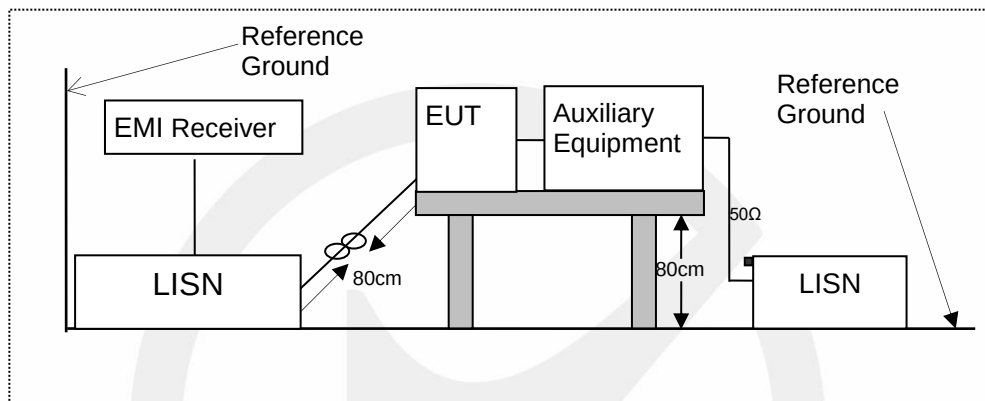

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

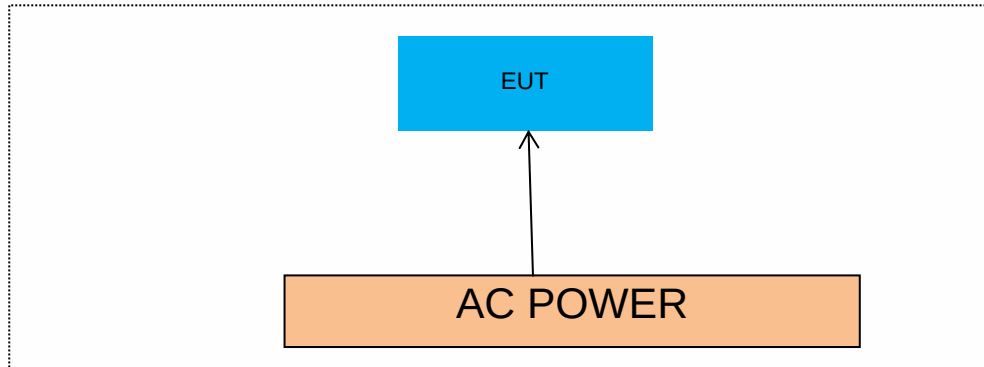

7.5 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 BANDWIDTH MEASUREMENT

8.1.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I
According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C
According to FCC Part 15.407(a)(3) for UNII Band III
According to FCC Part 15.407(e) for UNII Band III
According to 789033 D02 Section II(C)
According to 789033 D02 Section II(D)
According to RSS-Gen6.6, RSS 247, 6.2

8.1.2 Conformance Limit

The 26dB bandwidth is used to determine the conducted power limits.
Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup

8.1.4 Test Procedure

According to 789033 D02 v02r01 section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v01r02 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E.

However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.



8.1.5 Test Results

Temperature:	25°C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A

PASS.


Emission Bandwidth

TestMode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	18.400	5170.800	5189.200	---	---
11A	Ant2	5180	18.640	5170.640	5189.280	---	---
11A	Ant1	5200	18.600	5190.600	5209.200	---	---
11A	Ant2	5200	18.720	5190.600	5209.320	---	---
11A	Ant1	5240	18.640	5230.680	5249.320	---	---
11A	Ant2	5240	18.600	5230.600	5249.200	---	---
11A	Ant1	5260	18.680	5250.720	5269.400	---	---
11A	Ant2	5260	18.680	5250.640	5269.320	---	---
11A	Ant1	5280	18.560	5270.640	5289.200	---	---
11A	Ant2	5280	18.560	5270.760	5289.320	---	---
11A	Ant1	5320	18.600	5310.640	5329.240	---	---
11A	Ant2	5320	18.680	5310.640	5329.320	---	---
11A	Ant1	5500	18.520	5490.760	5509.280	---	---
11A	Ant2	5500	18.760	5490.520	5509.280	---	---
11A	Ant1	5580	18.560	5570.720	5589.280	---	---
11A	Ant2	5580	18.440	5570.840	5589.280	---	---
11A	Ant1	5700	18.440	5690.840	5709.280	---	---
11A	Ant2	5700	18.600	5690.720	5709.320	---	---
11A	Ant1	5745	18.520	5735.800	5754.320	---	---
11A	Ant2	5745	18.520	5735.760	5754.280	---	---
11A	Ant1	5785	18.440	5775.720	5794.160	---	---
11A	Ant2	5785	18.680	5775.520	5794.200	---	---
11A	Ant1	5825	18.600	5815.680	5834.280	---	---
11A	Ant2	5825	18.600	5815.760	5834.360	---	---
11N20MIMO	Ant1	5180	19.480	5170.240	5189.720	---	---
11N20MIMO	Ant2	5180	19.640	5170.080	5189.720	---	---
11N20MIMO	Ant1	5200	19.600	5190.120	5209.720	---	---
11N20MIMO	Ant2	5200	19.560	5190.200	5209.760	---	---
11N20MIMO	Ant1	5240	19.640	5230.120	5249.760	---	---
11N20MIMO	Ant2	5240	19.680	5230.080	5249.760	---	---
11N20MIMO	Ant1	5260	19.480	5250.320	5269.800	---	---
11N20MIMO	Ant2	5260	19.480	5250.280	5269.760	---	---
11N20MIMO	Ant1	5280	19.480	5270.280	5289.760	---	---
11N20MIMO	Ant2	5280	19.520	5270.200	5289.720	---	---
11N20MIMO	Ant1	5320	19.480	5310.280	5329.760	---	---
11N20MIMO	Ant2	5320	19.560	5310.200	5329.760	---	---
11N20MIMO	Ant1	5500	19.600	5490.200	5509.800	---	---
11N20MIMO	Ant2	5500	19.880	5490.040	5509.920	---	---
11N20MIMO	Ant1	5580	19.560	5570.240	5589.800	---	---
11N20MIMO	Ant2	5580	19.440	5570.280	5589.720	---	---


11N20MIMO	Ant1	5700	19.440	5690.280	5709.720	---	---
11N20MIMO	Ant2	5700	19.520	5690.240	5709.760	---	---
11N20MIMO	Ant1	5745	19.600	5735.200	5754.800	---	---
11N20MIMO	Ant2	5745	19.640	5735.120	5754.760	---	---
11N20MIMO	Ant1	5785	19.560	5775.200	5794.760	---	---
11N20MIMO	Ant2	5785	19.440	5775.200	5794.640	---	---
11N20MIMO	Ant1	5825	19.480	5815.280	5834.760	---	---
11N20MIMO	Ant2	5825	19.640	5815.120	5834.760	---	---
11N40MIMO	Ant1	5190	38.960	5170.560	5209.520	---	---
11N40MIMO	Ant2	5190	39.040	5170.400	5209.440	---	---
11N40MIMO	Ant1	5230	39.120	5210.480	5249.600	---	---
11N40MIMO	Ant2	5230	39.040	5210.480	5249.520	---	---
11N40MIMO	Ant1	5270	39.040	5250.400	5289.440	---	---
11N40MIMO	Ant2	5270	39.200	5250.320	5289.520	---	---
11N40MIMO	Ant1	5310	39.040	5290.480	5329.520	---	---
11N40MIMO	Ant2	5310	39.200	5290.320	5329.520	---	---
11N40MIMO	Ant1	5510	38.960	5490.560	5529.520	---	---
11N40MIMO	Ant2	5510	38.880	5490.560	5529.440	---	---
11N40MIMO	Ant1	5550	39.040	5530.560	5569.600	---	---
11N40MIMO	Ant2	5550	39.120	5530.480	5569.600	---	---
11N40MIMO	Ant1	5670	39.040	5650.480	5689.520	---	---
11N40MIMO	Ant2	5670	39.120	5650.320	5689.440	---	---
11N40MIMO	Ant1	5755	39.040	5735.560	5774.600	---	---
11N40MIMO	Ant2	5755	38.960	5735.560	5774.520	---	---
11N40MIMO	Ant1	5795	39.120	5775.480	5814.600	---	---
11N40MIMO	Ant2	5795	38.960	5775.560	5814.520	---	---
11AC20MIMO	Ant1	5180	19.320	5170.320	5189.640	---	---
11AC20MIMO	Ant2	5180	19.600	5170.120	5189.720	---	---
11AC20MIMO	Ant1	5200	19.640	5190.120	5209.760	---	---
11AC20MIMO	Ant2	5200	19.680	5190.120	5209.800	---	---
11AC20MIMO	Ant1	5240	19.600	5230.080	5249.680	---	---
11AC20MIMO	Ant2	5240	19.480	5230.200	5249.680	---	---
11AC20MIMO	Ant1	5260	19.560	5250.160	5269.720	---	---
11AC20MIMO	Ant2	5260	19.560	5250.200	5269.760	---	---
11AC20MIMO	Ant1	5280	19.440	5270.240	5289.680	---	---
11AC20MIMO	Ant2	5280	19.600	5270.160	5289.760	---	---
11AC20MIMO	Ant1	5320	19.520	5310.160	5329.680	---	---
11AC20MIMO	Ant2	5320	19.560	5310.160	5329.720	---	---
11AC20MIMO	Ant1	5500	19.480	5490.320	5509.800	---	---
11AC20MIMO	Ant2	5500	19.520	5490.240	5509.760	---	---
11AC20MIMO	Ant1	5580	19.520	5570.240	5589.760	---	---
11AC20MIMO	Ant2	5580	19.600	5570.160	5589.760	---	---
11AC20MIMO	Ant1	5700	19.360	5690.320	5709.680	---	---
11AC20MIMO	Ant2	5700	19.480	5690.240	5709.720	---	---
11AC20MIMO	Ant1	5745	19.520	5735.200	5754.720	---	---
11AC20MIMO	Ant2	5745	19.640	5735.120	5754.760	---	---
11AC20MIMO	Ant1	5785	19.480	5775.280	5794.760	---	---
11AC20MIMO	Ant2	5785	19.400	5775.360	5794.760	---	---
11AC20MIMO	Ant1	5825	19.520	5815.200	5834.720	---	---
11AC20MIMO	Ant2	5825	19.360	5815.360	5834.720	---	---
11AC40MIMO	Ant1	5190	38.800	5170.560	5209.360	---	---
11AC40MIMO	Ant2	5190	38.960	5170.480	5209.440	---	---
11AC40MIMO	Ant1	5230	39.200	5210.480	5249.680	---	---
11AC40MIMO	Ant2	5230	38.880	5210.560	5249.440	---	---
11AC40MIMO	Ant1	5270	39.200	5250.400	5289.600	---	---

11AC40MIMO	Ant2	5270	39.120	5250.400	5289.520	---	---
11AC40MIMO	Ant1	5310	39.040	5290.480	5329.520	---	---
11AC40MIMO	Ant2	5310	38.960	5290.560	5329.520	---	---
11AC40MIMO	Ant1	5510	39.200	5490.320	5529.520	---	---
11AC40MIMO	Ant2	5510	39.200	5490.560	5529.760	---	---
11AC40MIMO	Ant1	5550	39.040	5530.480	5569.520	---	---
11AC40MIMO	Ant2	5550	39.120	5530.560	5569.680	---	---
11AC40MIMO	Ant1	5670	39.040	5650.480	5689.520	---	---
11AC40MIMO	Ant2	5670	39.120	5650.400	5689.520	---	---
11AC40MIMO	Ant1	5755	38.800	5735.640	5774.440	---	---
11AC40MIMO	Ant2	5755	38.720	5735.640	5774.360	---	---
11AC40MIMO	Ant1	5795	38.960	5775.640	5814.600	---	---
11AC40MIMO	Ant2	5795	38.880	5775.560	5814.440	---	---
11AC80MIMO	Ant1	5210	85.920	5167.280	5253.200	---	---
11AC80MIMO	Ant2	5210	86.560	5166.640	5253.200	---	---
11AC80MIMO	Ant1	5290	86.240	5246.640	5332.880	---	---
11AC80MIMO	Ant2	5290	86.720	5246.320	5333.040	---	---
11AC80MIMO	Ant1	5530	86.400	5486.800	5573.200	---	---
11AC80MIMO	Ant2	5530	86.720	5487.120	5573.840	---	---
11AC80MIMO	Ant1	5610	86.400	5566.960	5653.360	---	---
11AC80MIMO	Ant2	5610	85.440	5567.600	5653.040	---	---
11AC80MIMO	Ant1	5775	86.080	5731.480	5817.560	---	---
11AC80MIMO	Ant2	5775	86.080	5731.800	5817.880	---	---
11AX20MIMO	Ant1	5180	20.400	5169.760	5190.160	---	---
11AX20MIMO	Ant2	5180	20.520	5169.720	5190.240	---	---
11AX20MIMO	Ant1	5200	20.400	5189.880	5210.280	---	---
11AX20MIMO	Ant2	5200	20.320	5189.840	5210.160	---	---
11AX20MIMO	Ant1	5240	20.360	5229.840	5250.200	---	---
11AX20MIMO	Ant2	5240	20.320	5229.840	5250.160	---	---
11AX20MIMO	Ant1	5260	20.200	5250.000	5270.200	---	---
11AX20MIMO	Ant2	5260	20.400	5249.760	5270.160	---	---
11AX20MIMO	Ant1	5280	20.440	5269.760	5290.200	---	---
11AX20MIMO	Ant2	5280	20.400	5269.720	5290.120	---	---
11AX20MIMO	Ant1	5320	20.440	5309.720	5330.160	---	---
11AX20MIMO	Ant2	5320	20.360	5309.840	5330.200	---	---
11AX20MIMO	Ant1	5500	20.320	5489.880	5510.200	---	---
11AX20MIMO	Ant2	5500	20.320	5489.840	5510.160	---	---
11AX20MIMO	Ant1	5580	20.200	5570.000	5590.200	---	---
11AX20MIMO	Ant2	5580	20.440	5569.720	5590.160	---	---
11AX20MIMO	Ant1	5700	20.320	5689.840	5710.160	---	---
11AX20MIMO	Ant2	5700	20.320	5689.880	5710.200	---	---
11AX20MIMO	Ant1	5745	20.360	5734.800	5755.160	---	---
11AX20MIMO	Ant2	5745	20.280	5734.840	5755.120	---	---
11AX20MIMO	Ant1	5785	20.320	5774.840	5795.160	---	---
11AX20MIMO	Ant2	5785	20.440	5774.720	5795.160	---	---
11AX20MIMO	Ant1	5825	21.640	5814.760	5836.400	---	---
11AX20MIMO	Ant2	5825	20.200	5814.920	5835.120	---	---
11AX40MIMO	Ant1	5190	39.920	5170.080	5210.000	---	---
11AX40MIMO	Ant2	5190	39.760	5170.080	5209.840	---	---
11AX40MIMO	Ant1	5230	39.680	5210.080	5249.760	---	---
11AX40MIMO	Ant2	5230	39.600	5210.160	5249.760	---	---
11AX40MIMO	Ant1	5270	39.680	5250.160	5289.840	---	---
11AX40MIMO	Ant2	5270	40.000	5250.000	5290.000	---	---
11AX40MIMO	Ant1	5310	39.760	5290.160	5329.920	---	---
11AX40MIMO	Ant2	5310	39.680	5290.240	5329.920	---	---


11AX40MIMO	Ant1	5510	39.840	5490.160	5530.000	---	---
11AX40MIMO	Ant2	5510	39.760	5490.080	5529.840	---	---
11AX40MIMO	Ant1	5550	39.840	5530.160	5570.000	---	---
11AX40MIMO	Ant2	5550	39.600	5530.240	5569.840	---	---
11AX40MIMO	Ant1	5670	39.600	5650.240	5689.840	---	---
11AX40MIMO	Ant2	5670	39.840	5650.160	5690.000	---	---
11AX40MIMO	Ant1	5755	39.600	5735.160	5774.760	---	---
11AX40MIMO	Ant2	5755	39.840	5735.160	5775.000	---	---
11AX40MIMO	Ant1	5795	39.680	5775.160	5814.840	---	---
11AX40MIMO	Ant2	5795	39.680	5775.240	5814.920	---	---
11AX80MIMO	Ant1	5210	80.480	5169.680	5250.160	---	---
11AX80MIMO	Ant2	5210	80.800	5169.520	5250.320	---	---
11AX80MIMO	Ant1	5290	82.080	5249.040	5331.120	---	---
11AX80MIMO	Ant2	5290	80.800	5249.680	5330.480	---	---
11AX80MIMO	Ant1	5530	81.600	5489.360	5570.960	---	---
11AX80MIMO	Ant2	5530	80.320	5490.000	5570.320	---	---
11AX80MIMO	Ant1	5610	81.760	5569.040	5650.800	---	---
11AX80MIMO	Ant2	5610	80.480	5570.000	5650.480	---	---
11AX80MIMO	Ant1	5775	80.800	5734.360	5815.160	---	---
11AX80MIMO	Ant2	5775	80.640	5734.520	5815.160	---	---

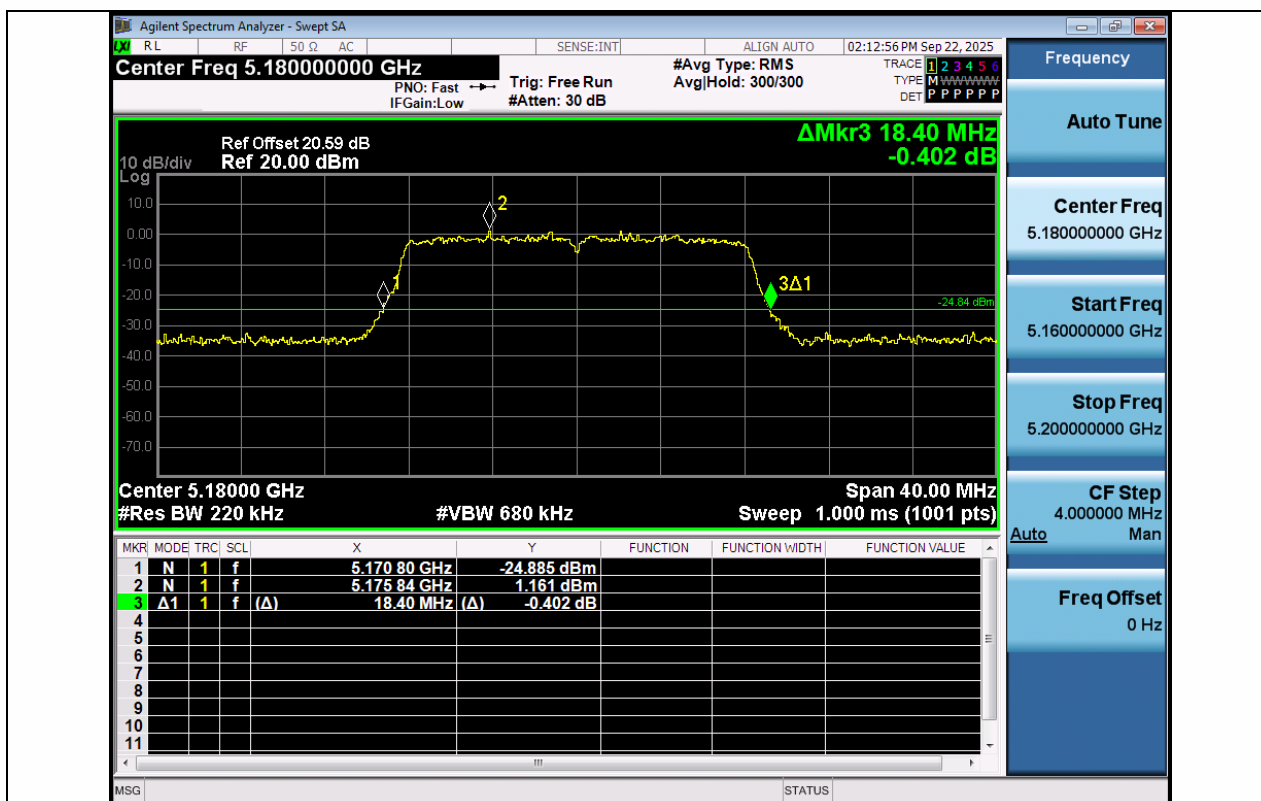


11A-Ant1-5180

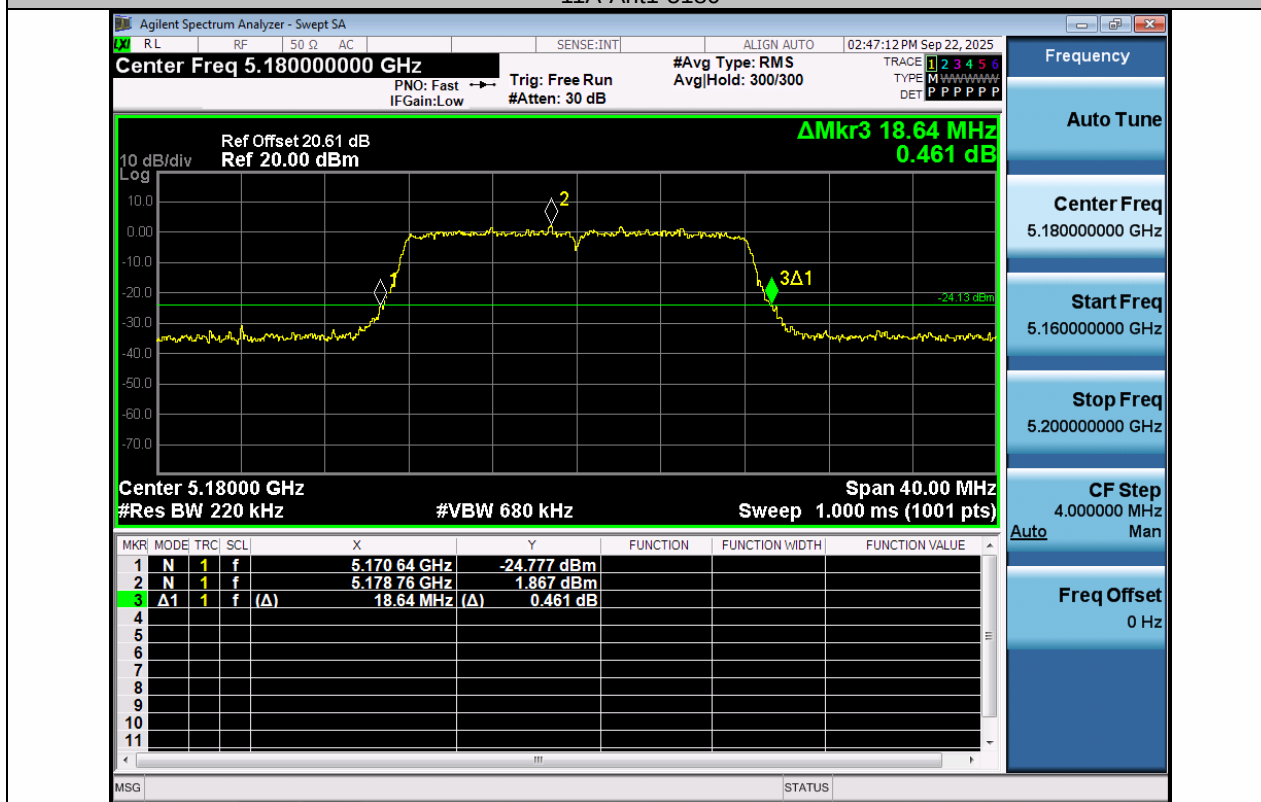


11A-Ant2-5180

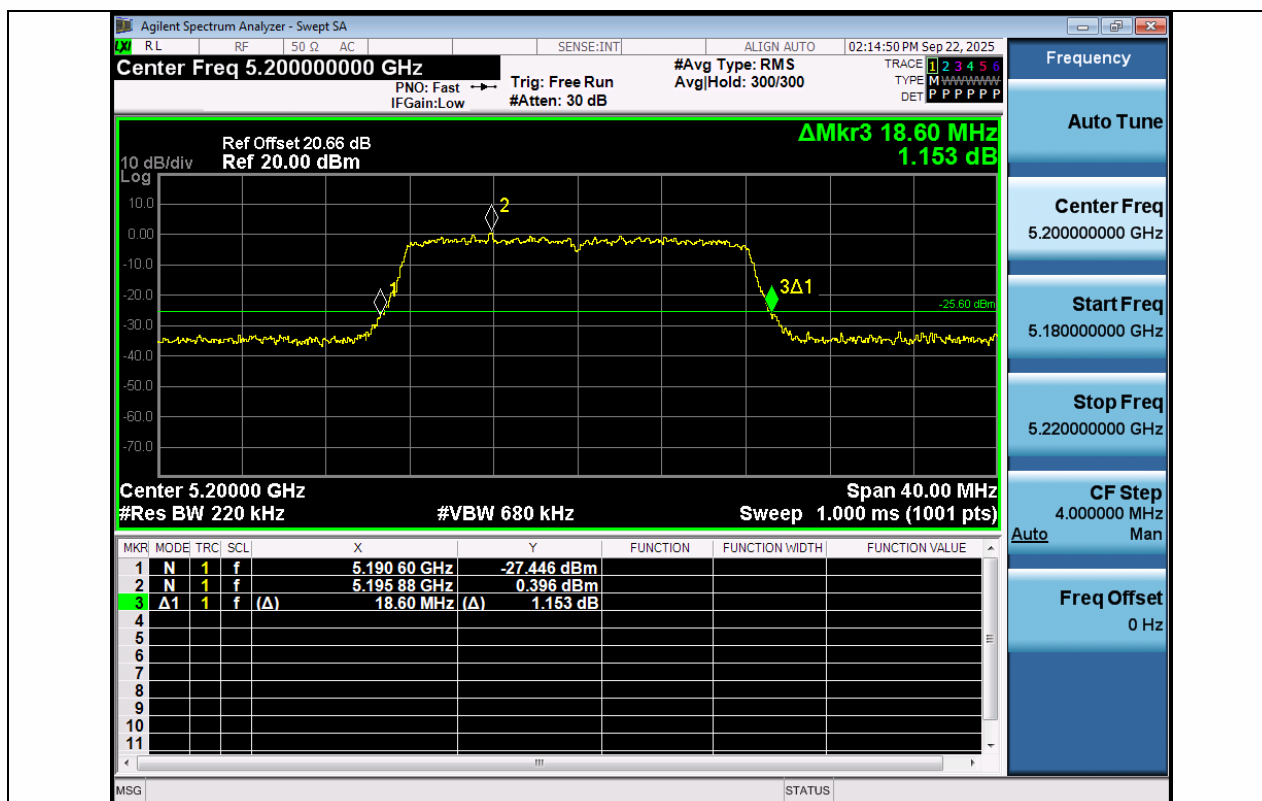


11A-Ant1-5200

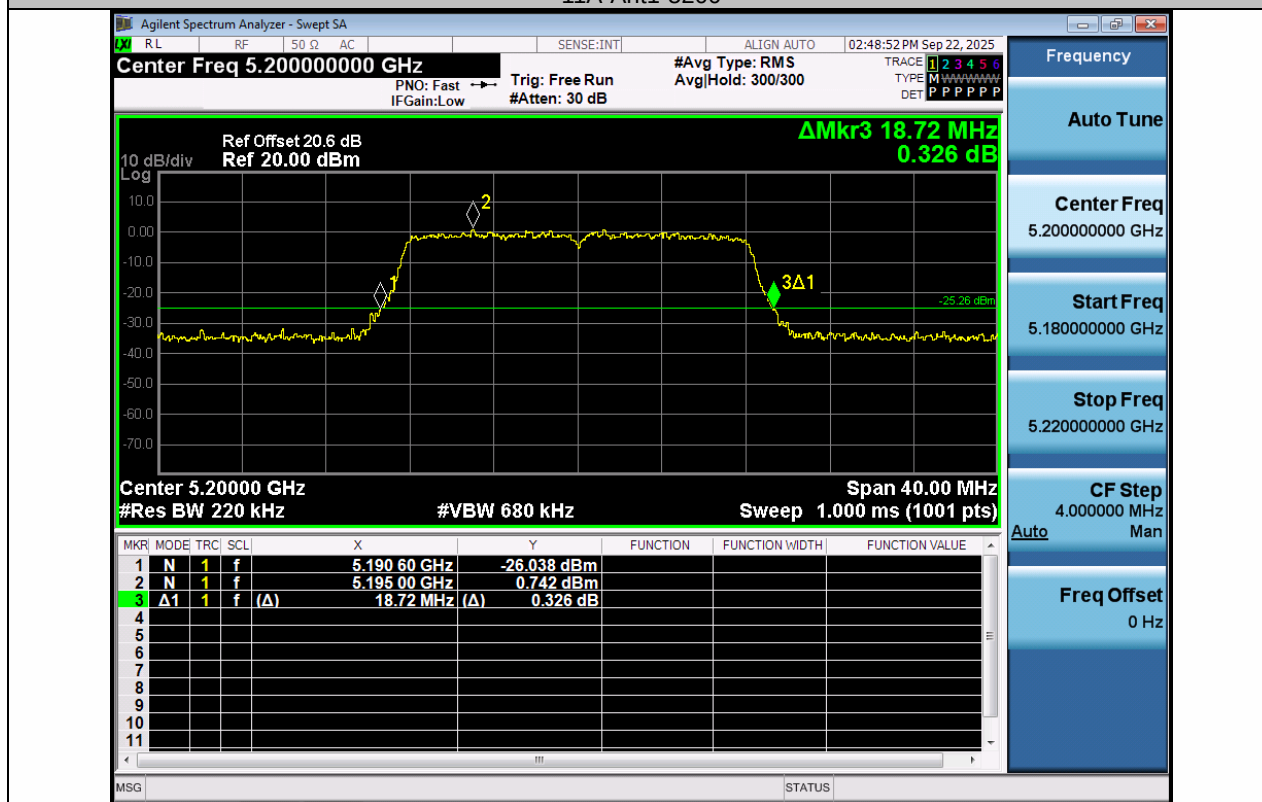


11A-Ant2-5200

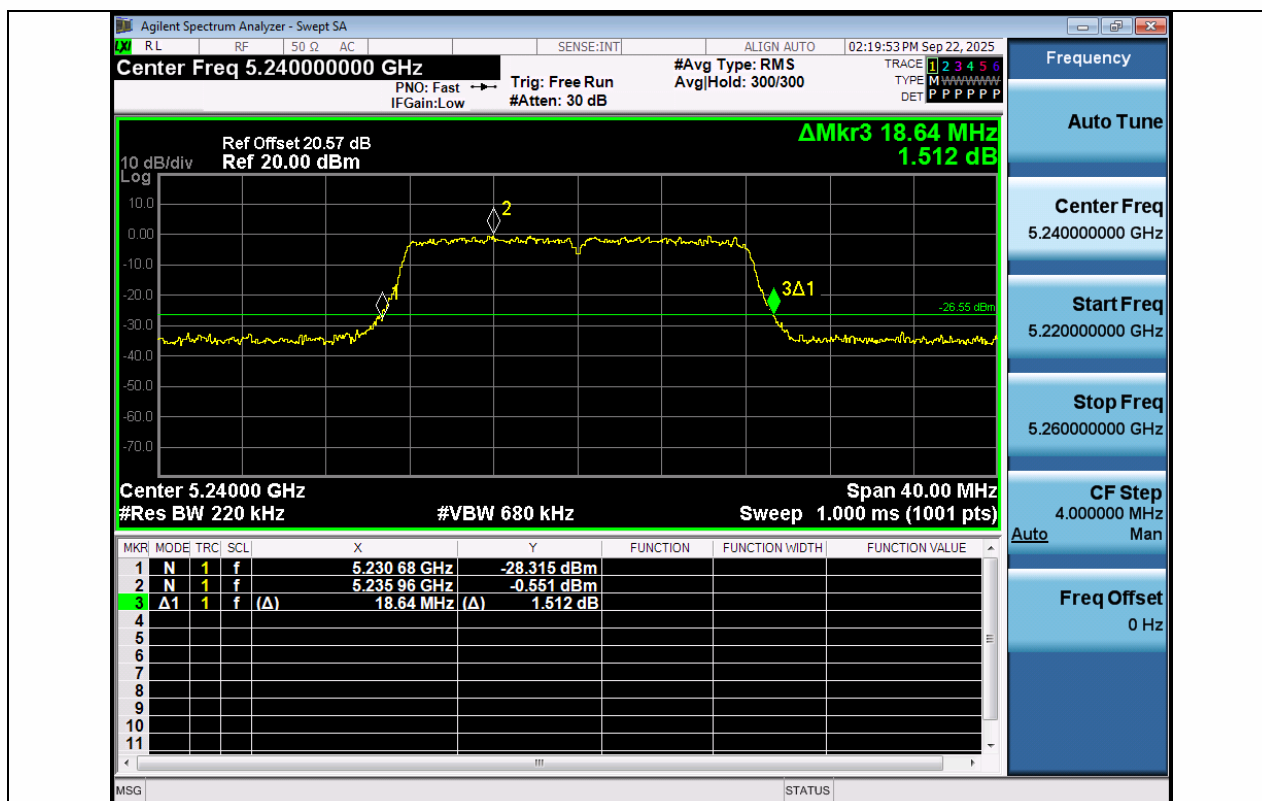


11A-Ant1-5240

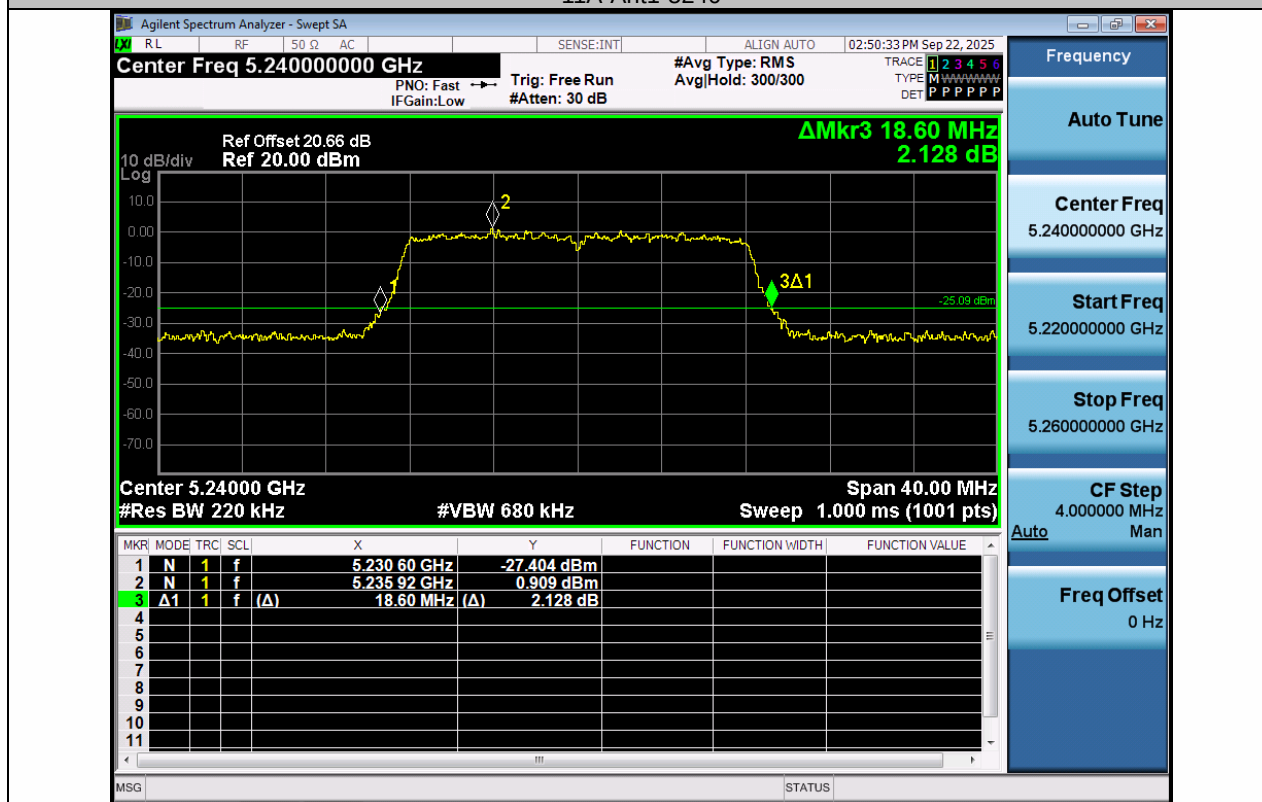


11A-Ant2-5240

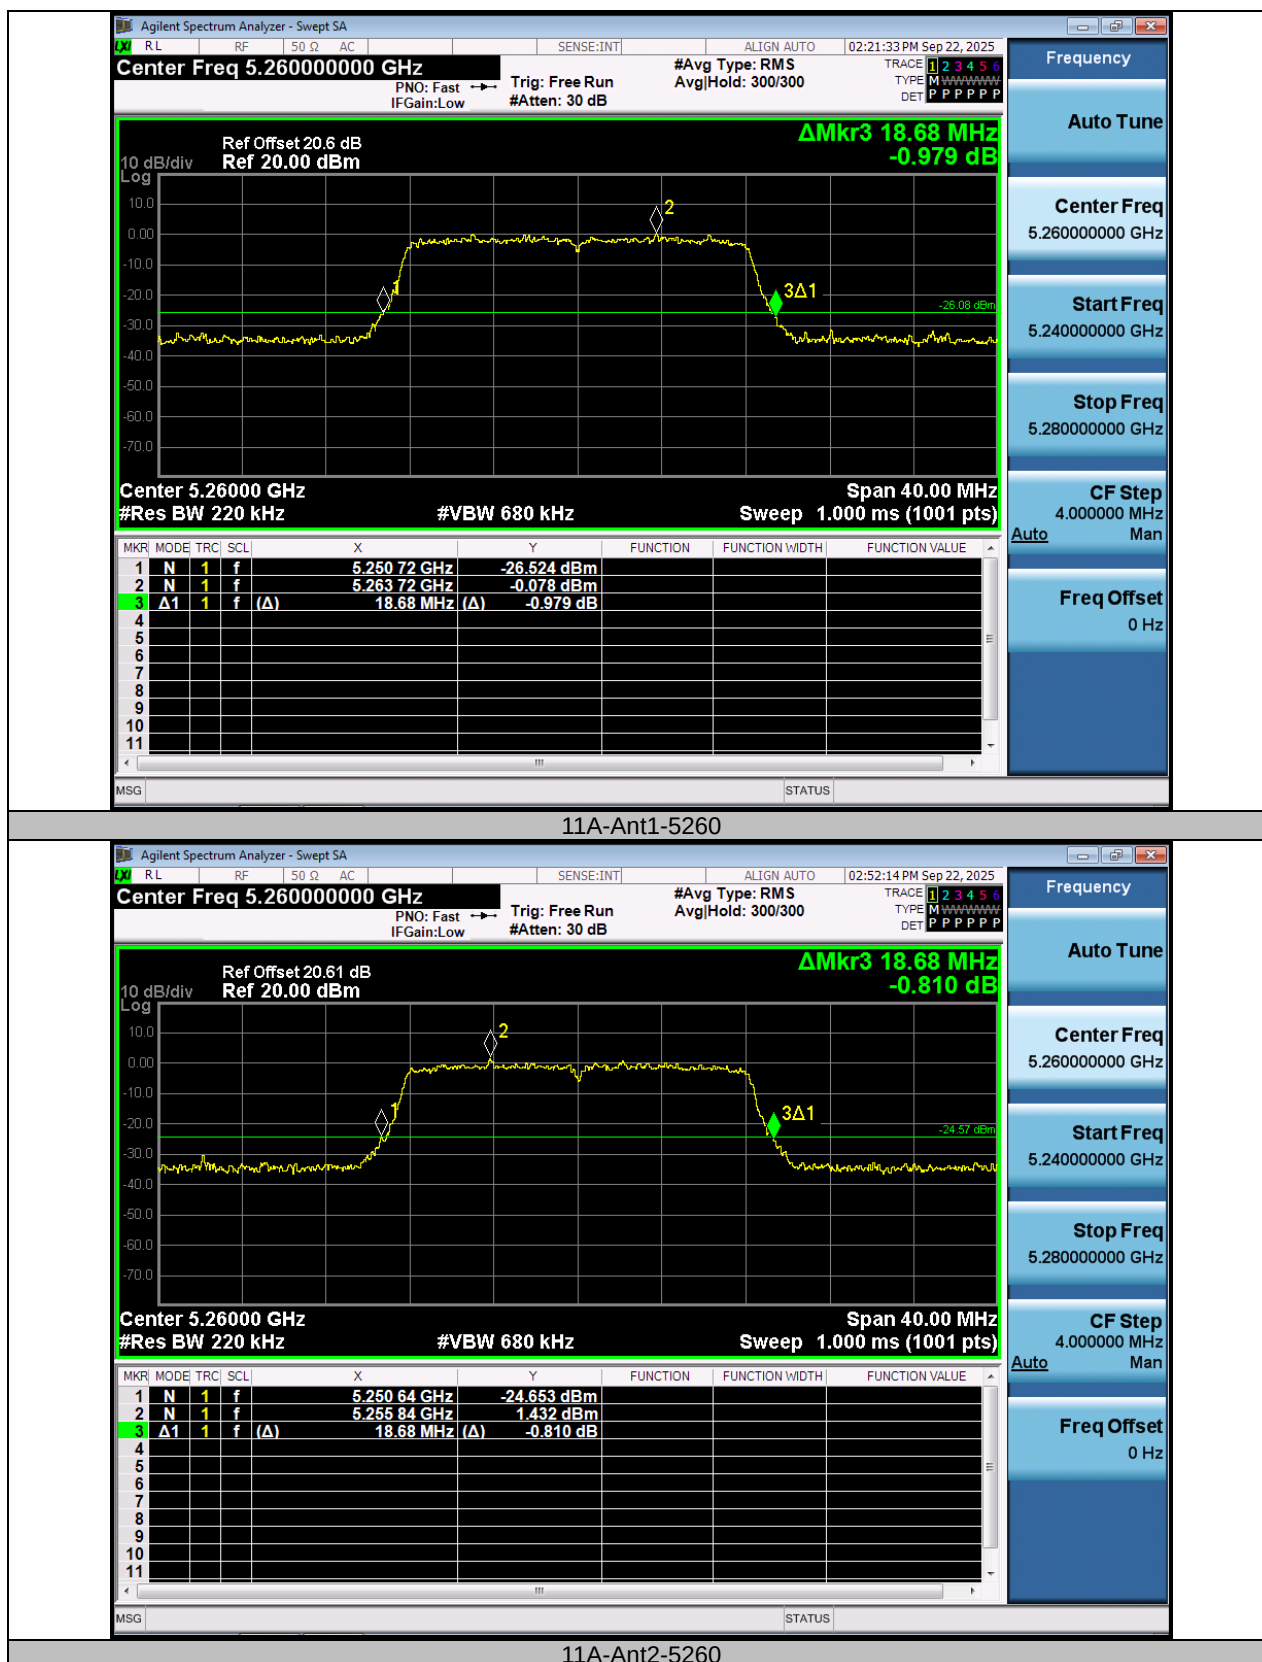


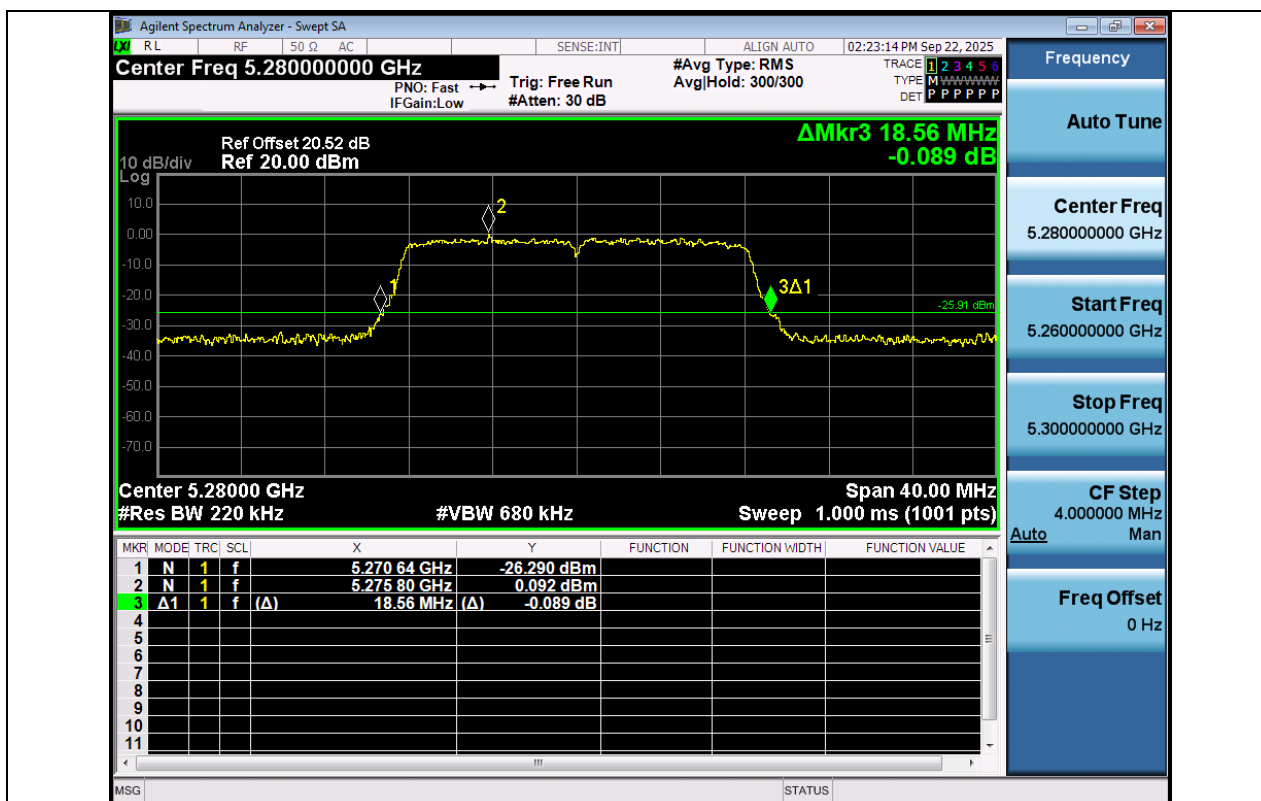


11A-Ant1-5280

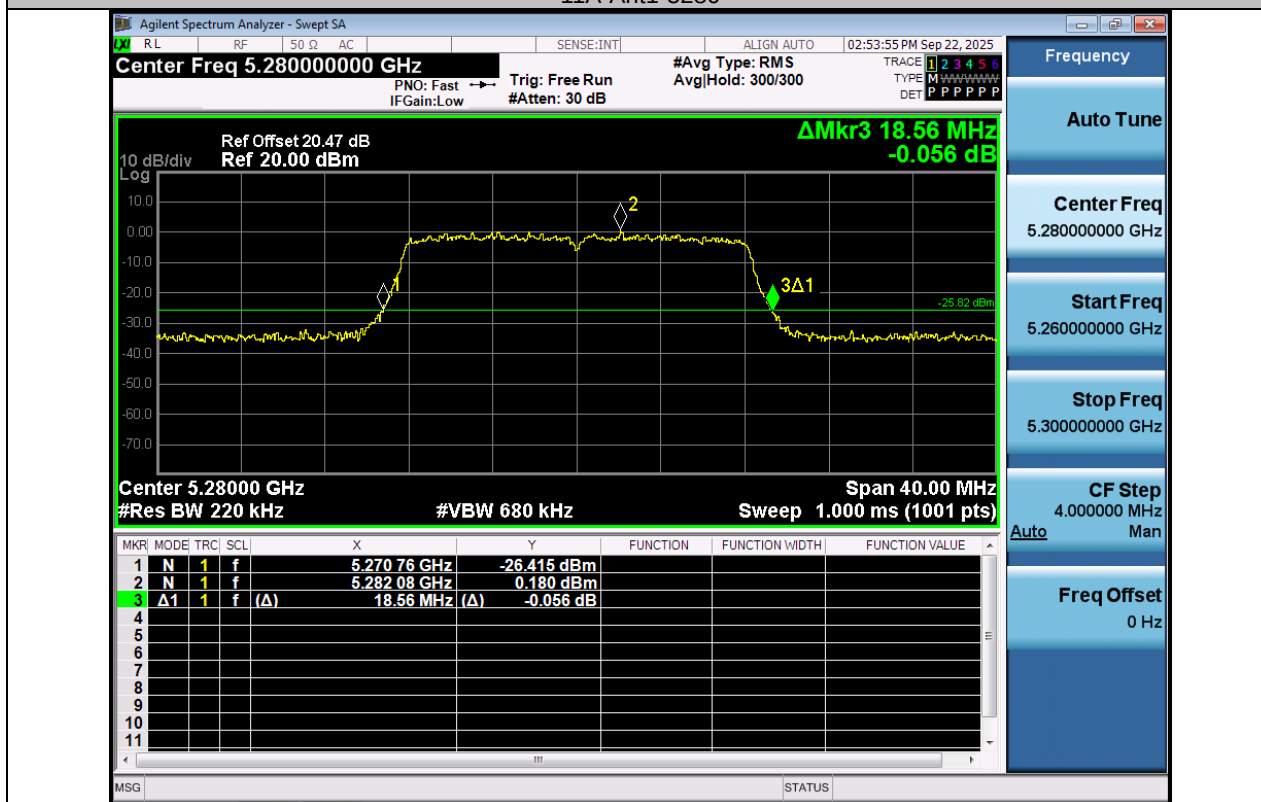


11A-Ant2-5280

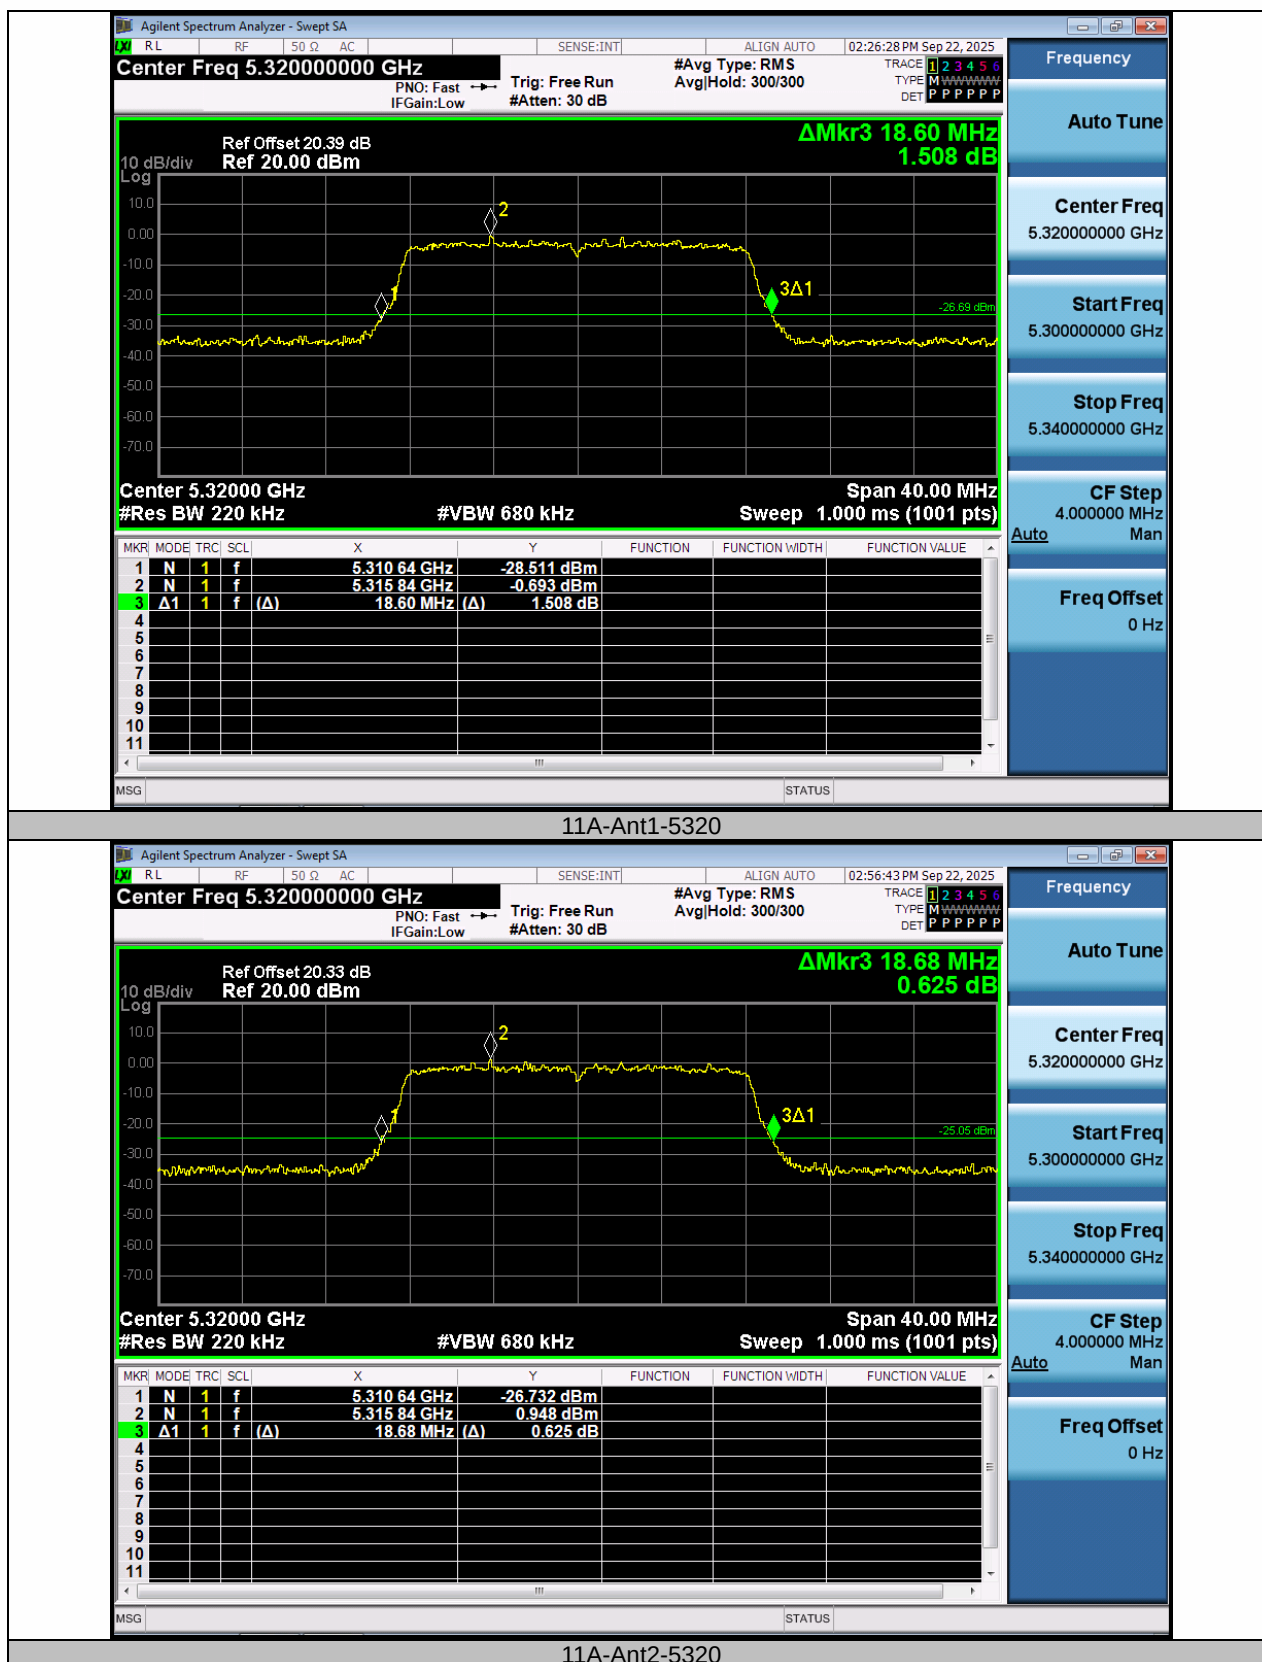


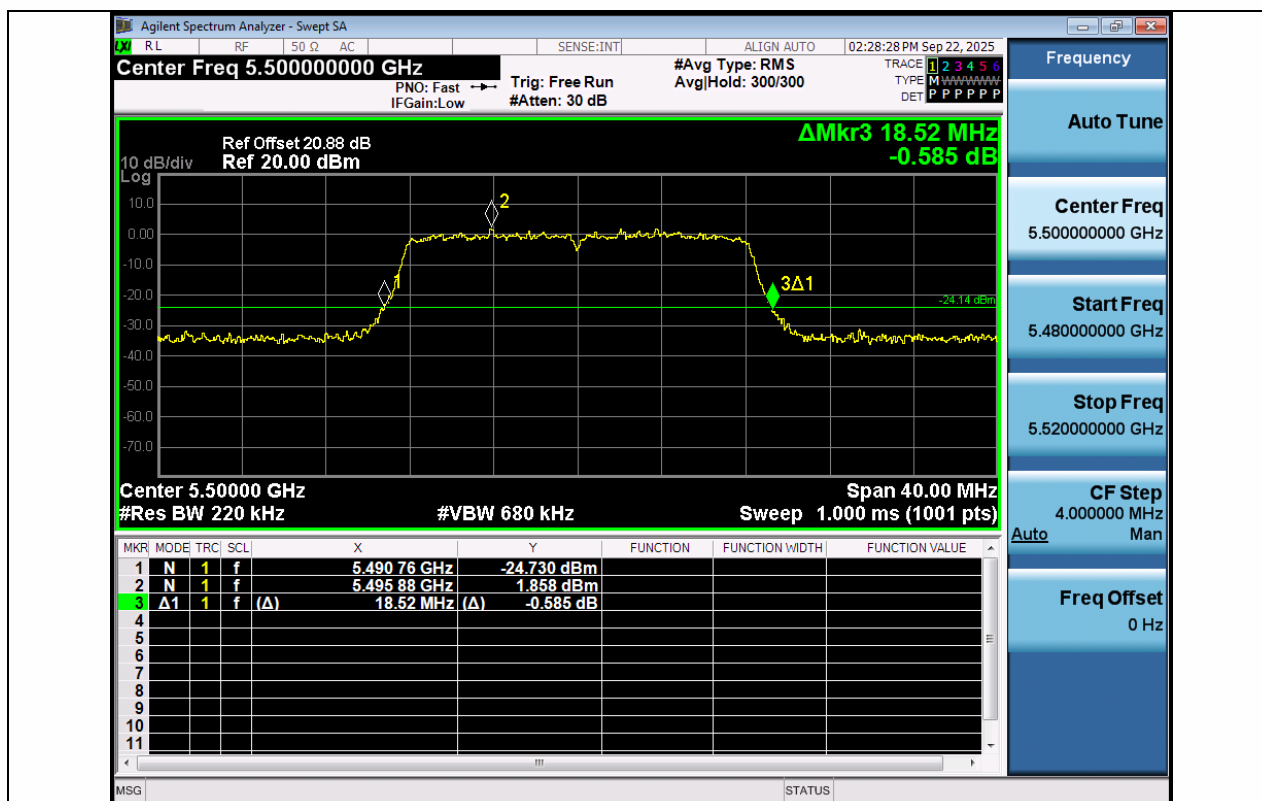


11A-Ant1-5500

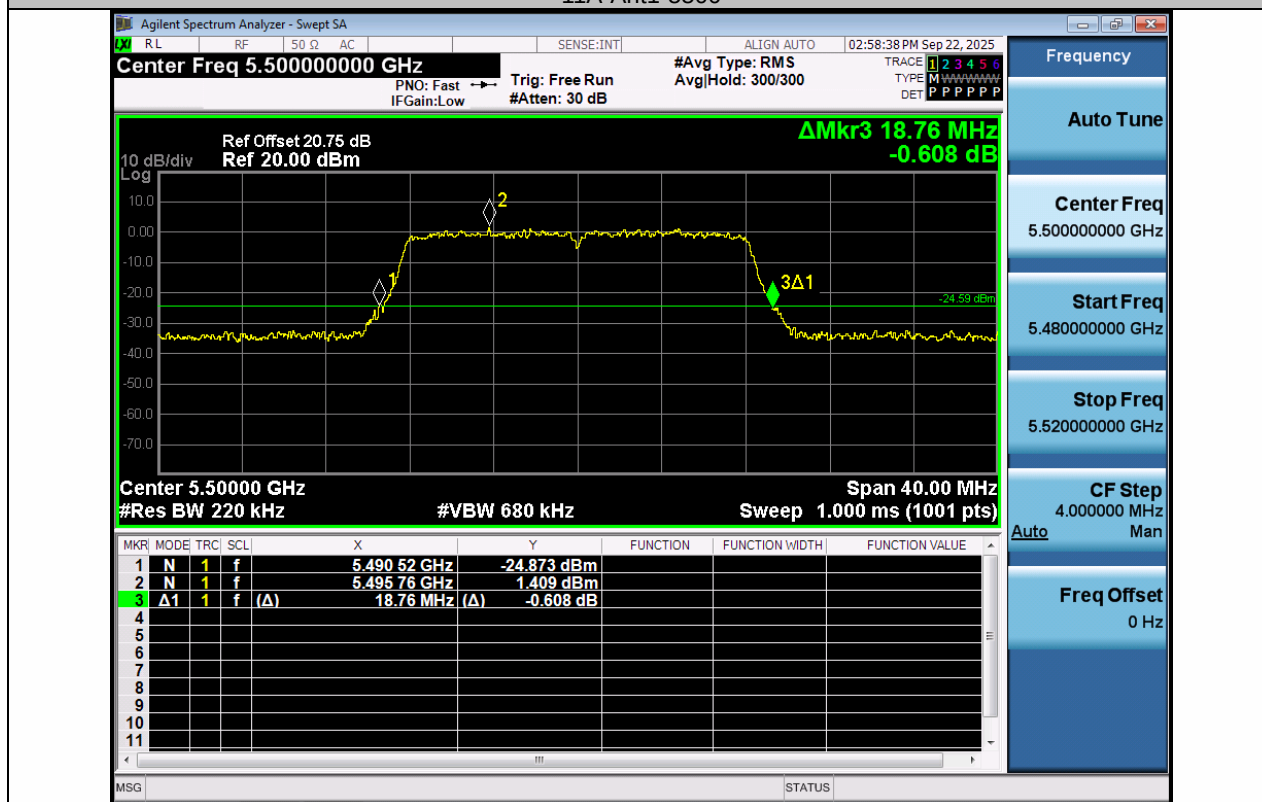


11A-Ant2-5500

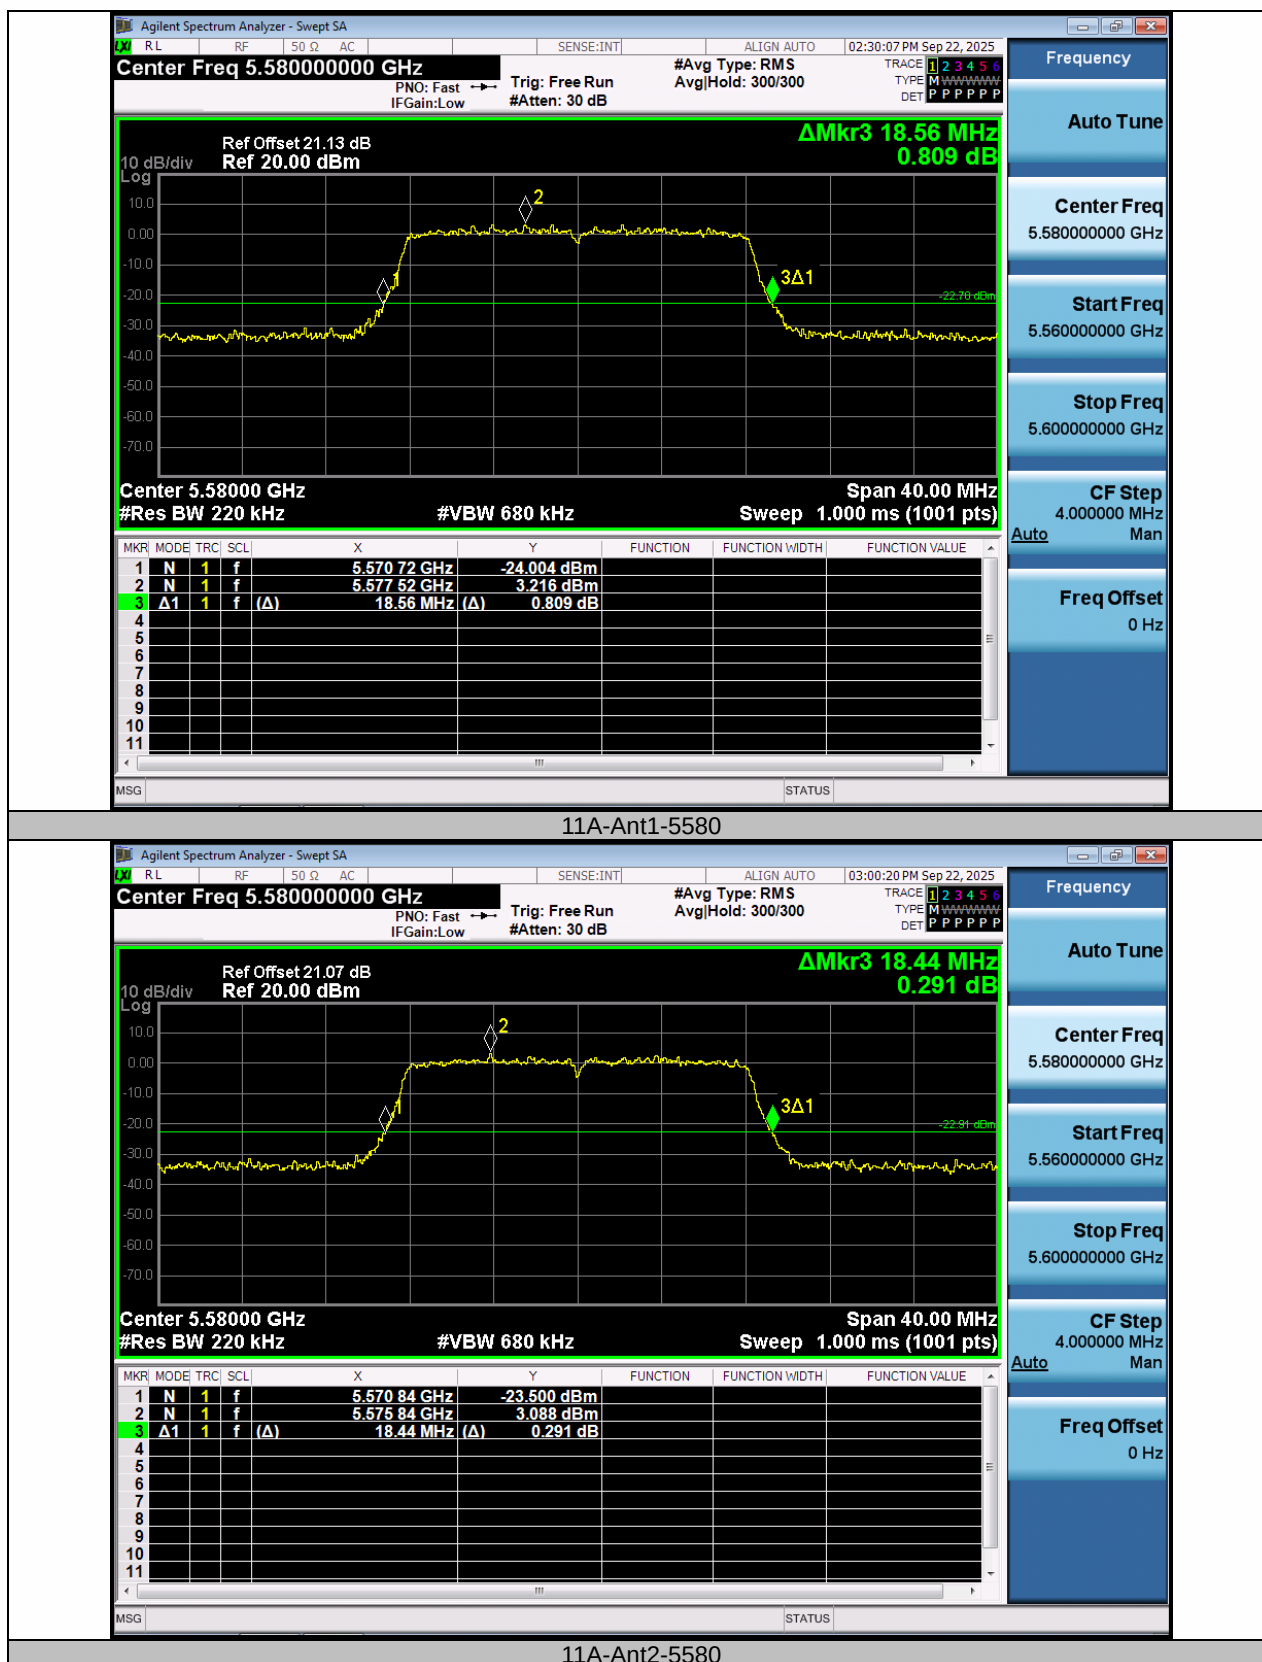


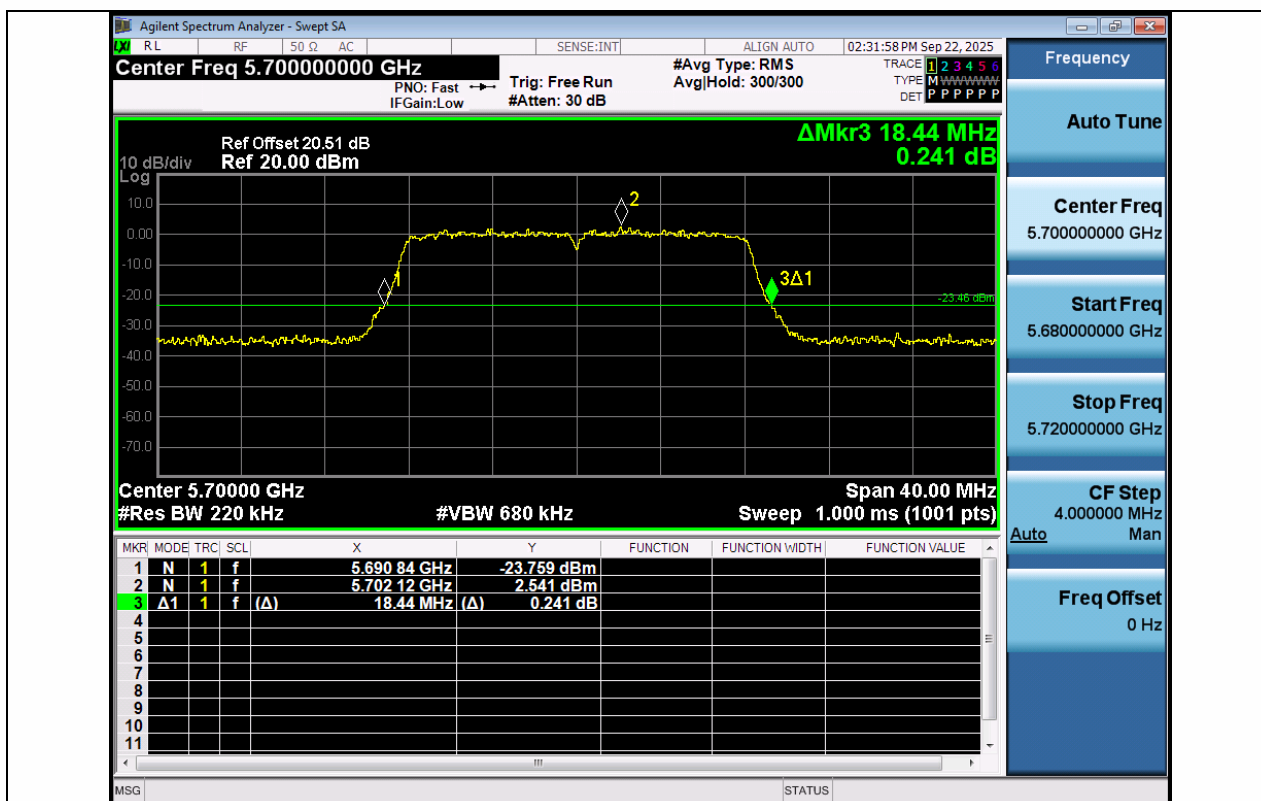


11A-Ant1-5700

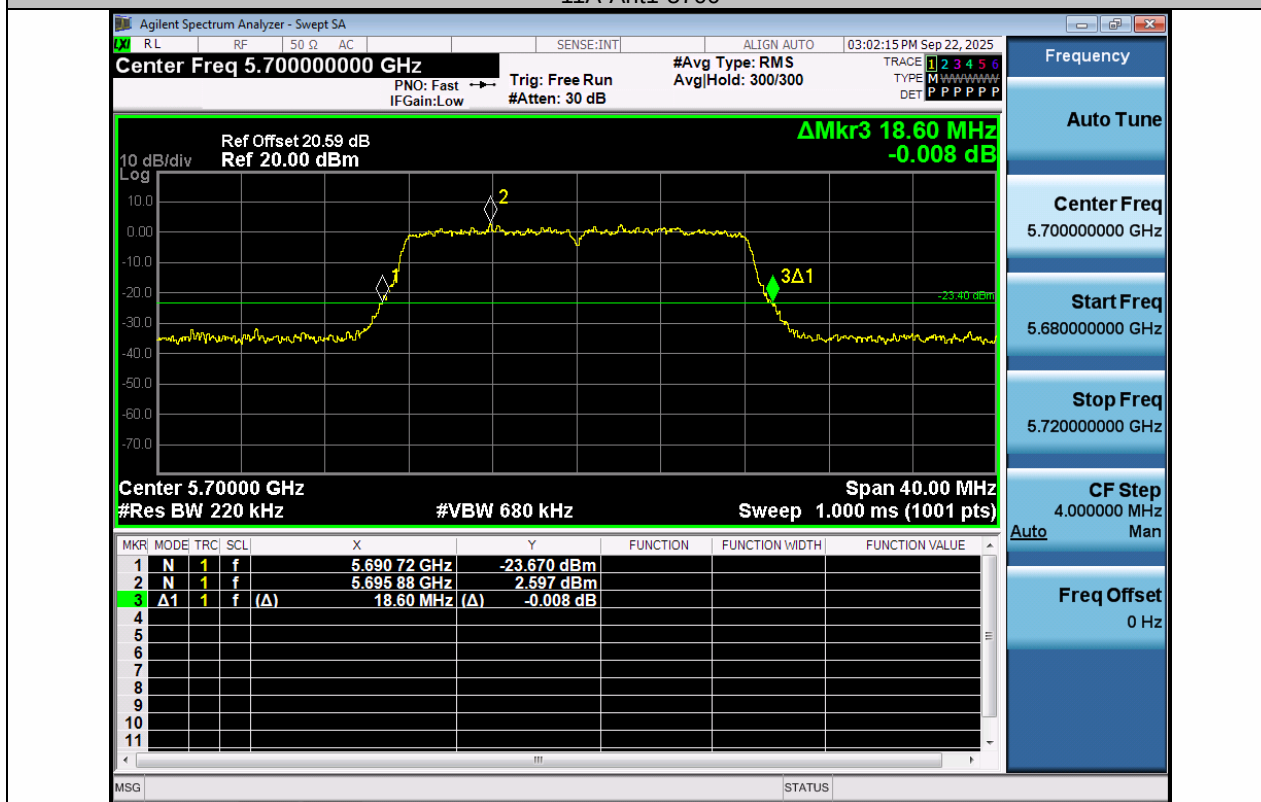


11A-Ant2-5700

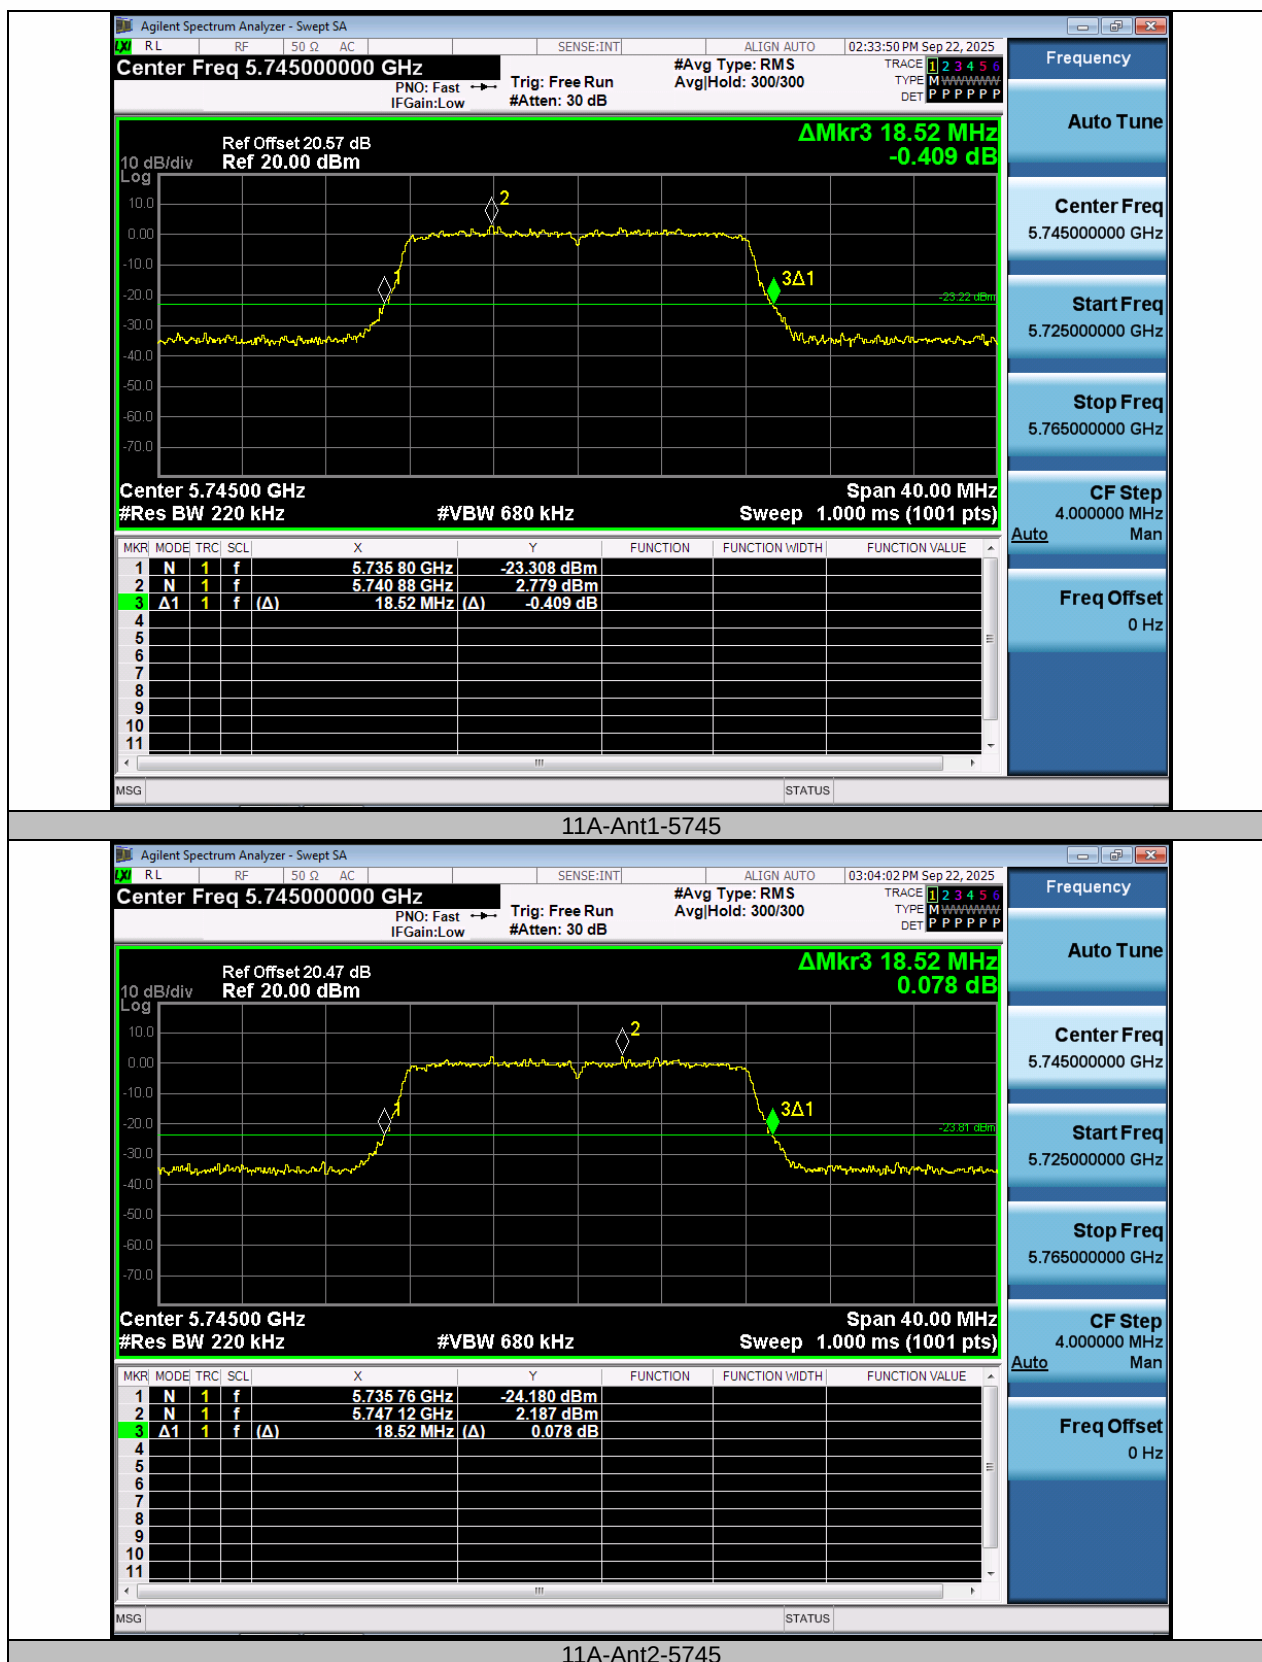


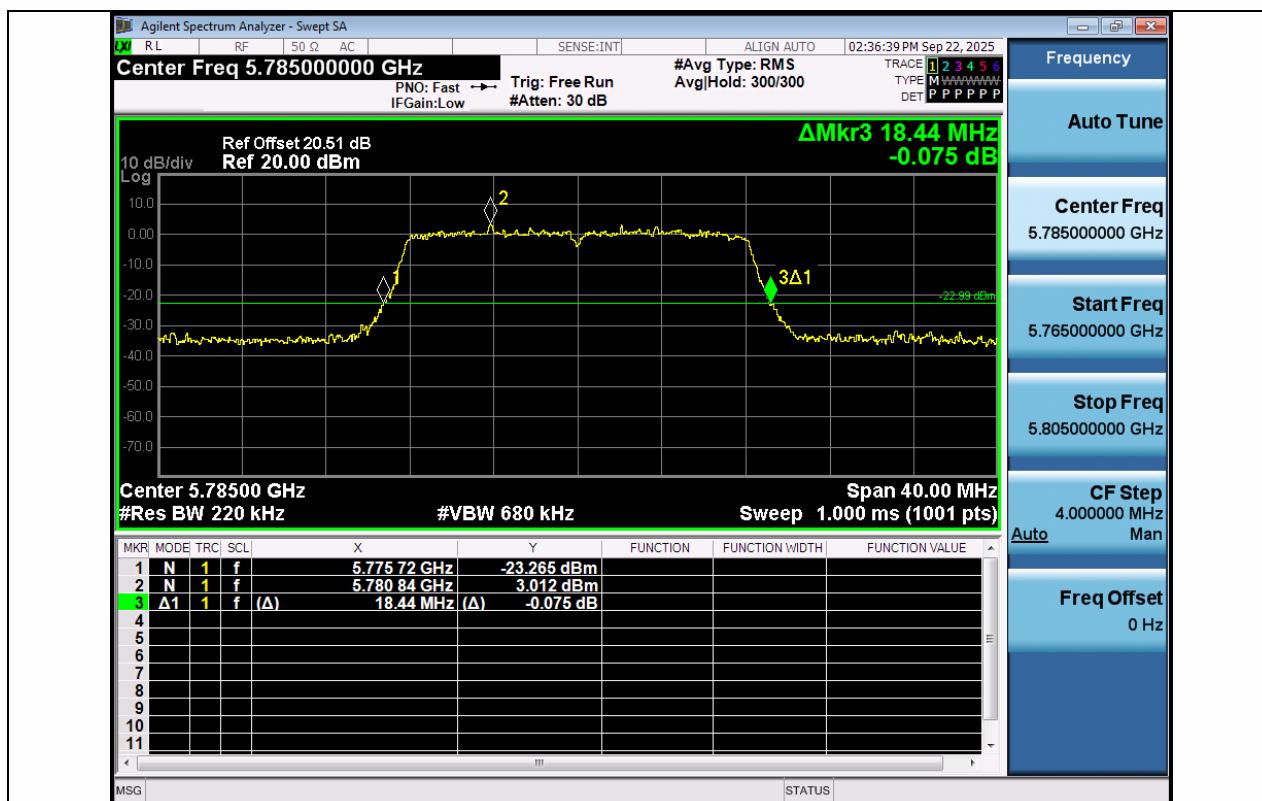


11A-Ant1-5785

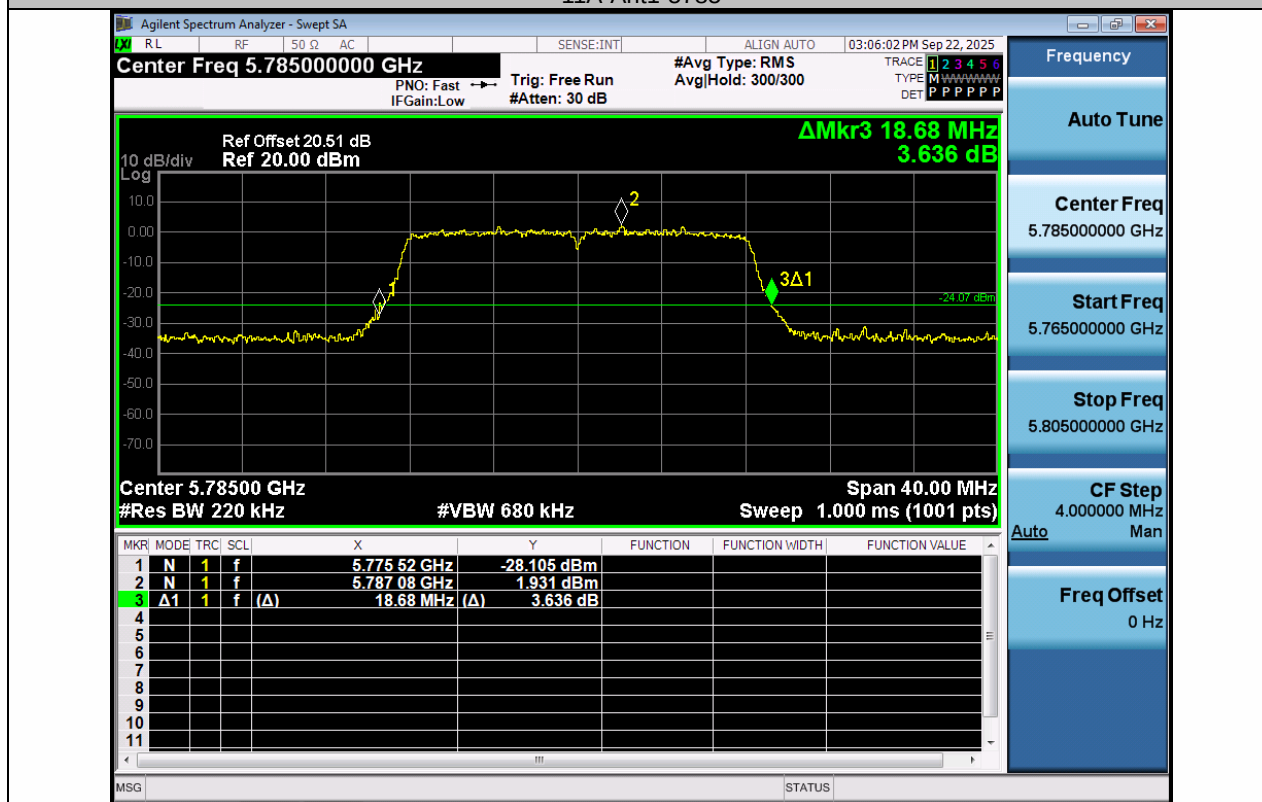


11A-Ant2-5785

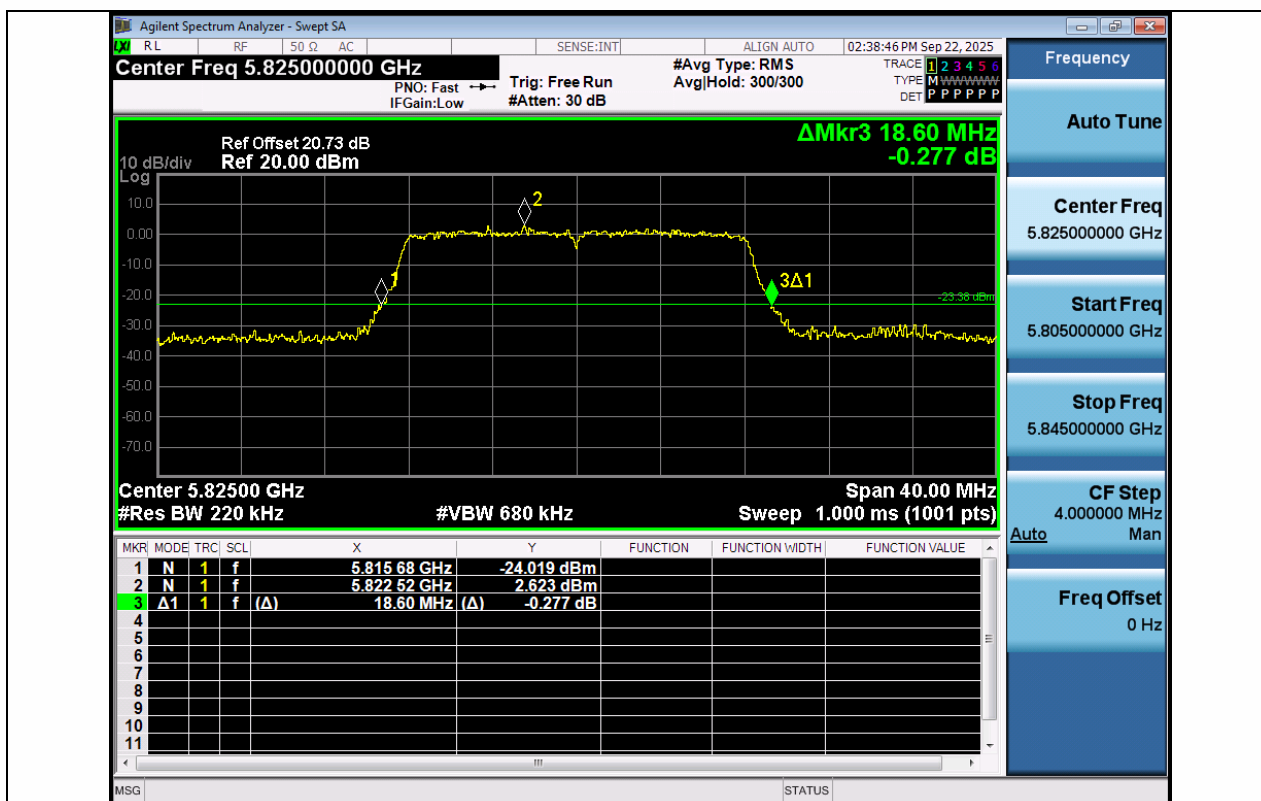



11A-Ant1-5825

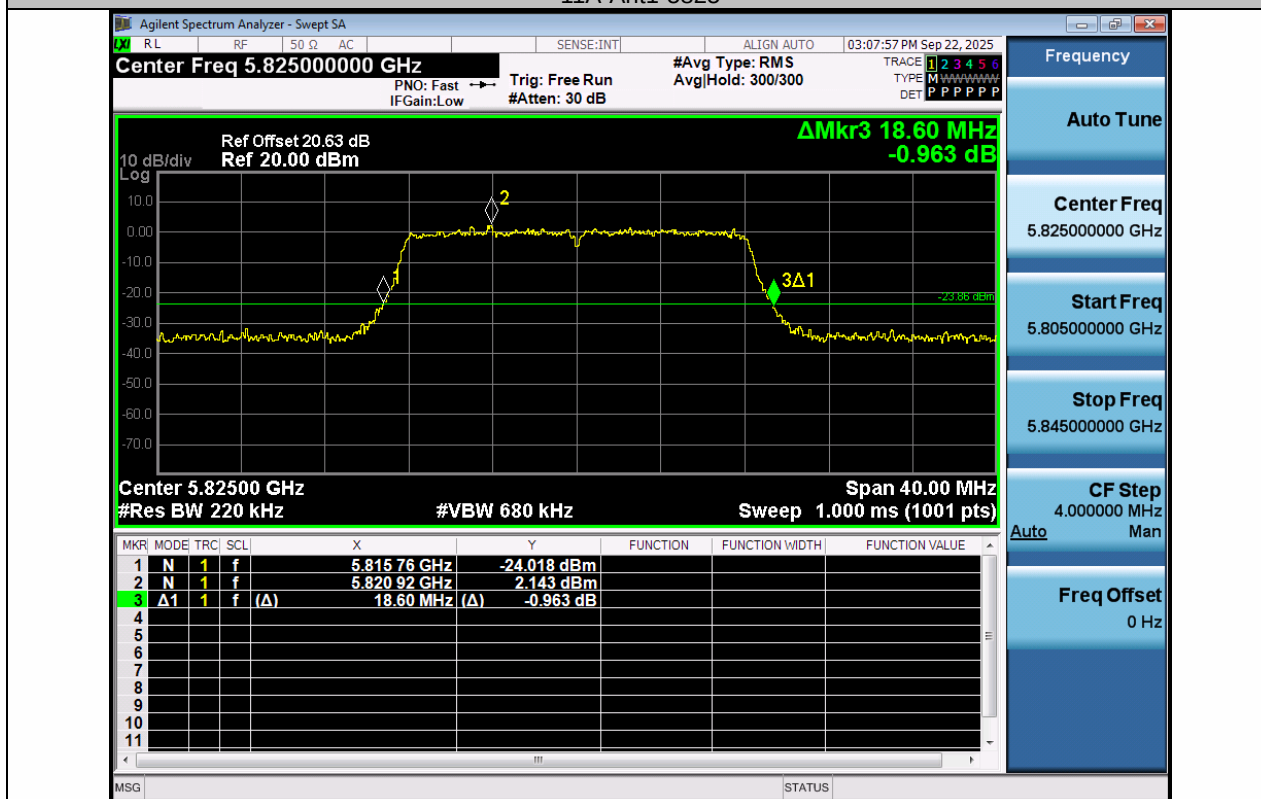


11A-Ant2-5825

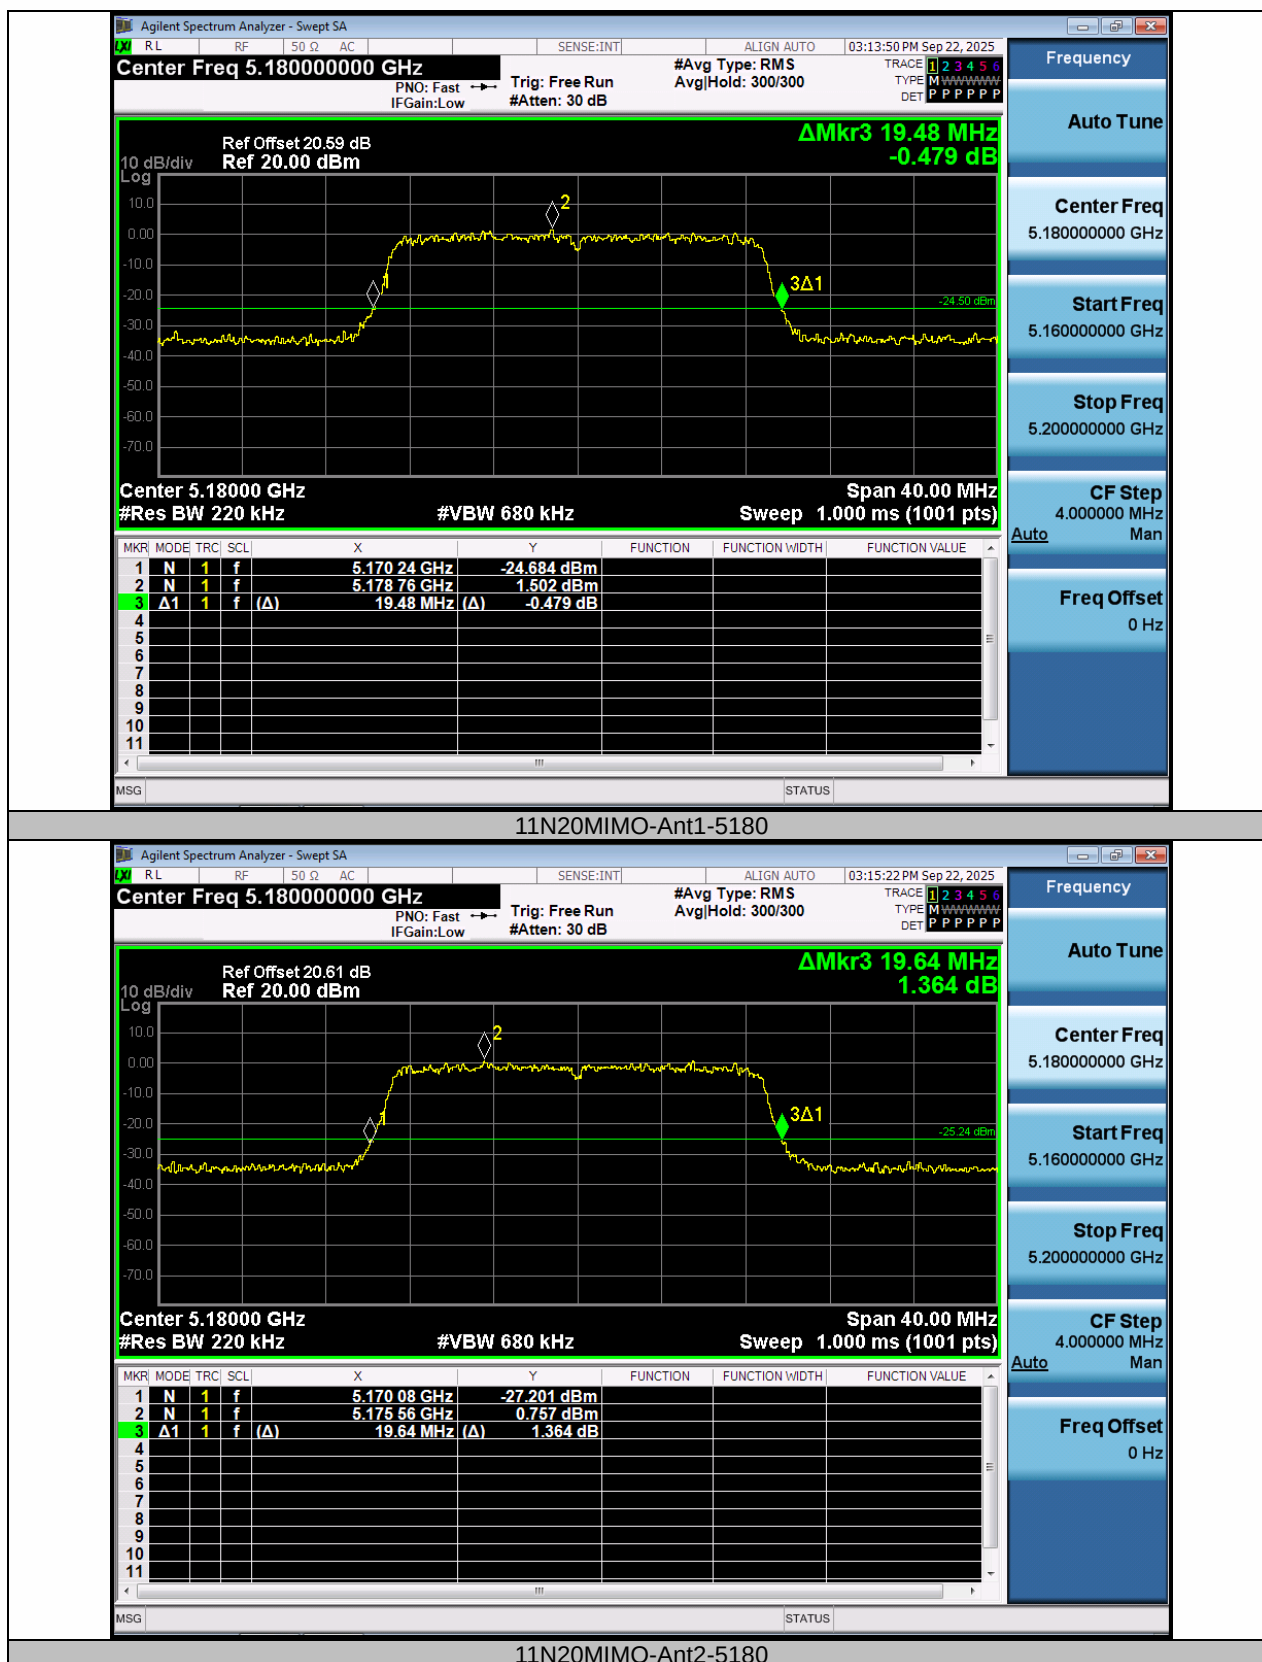


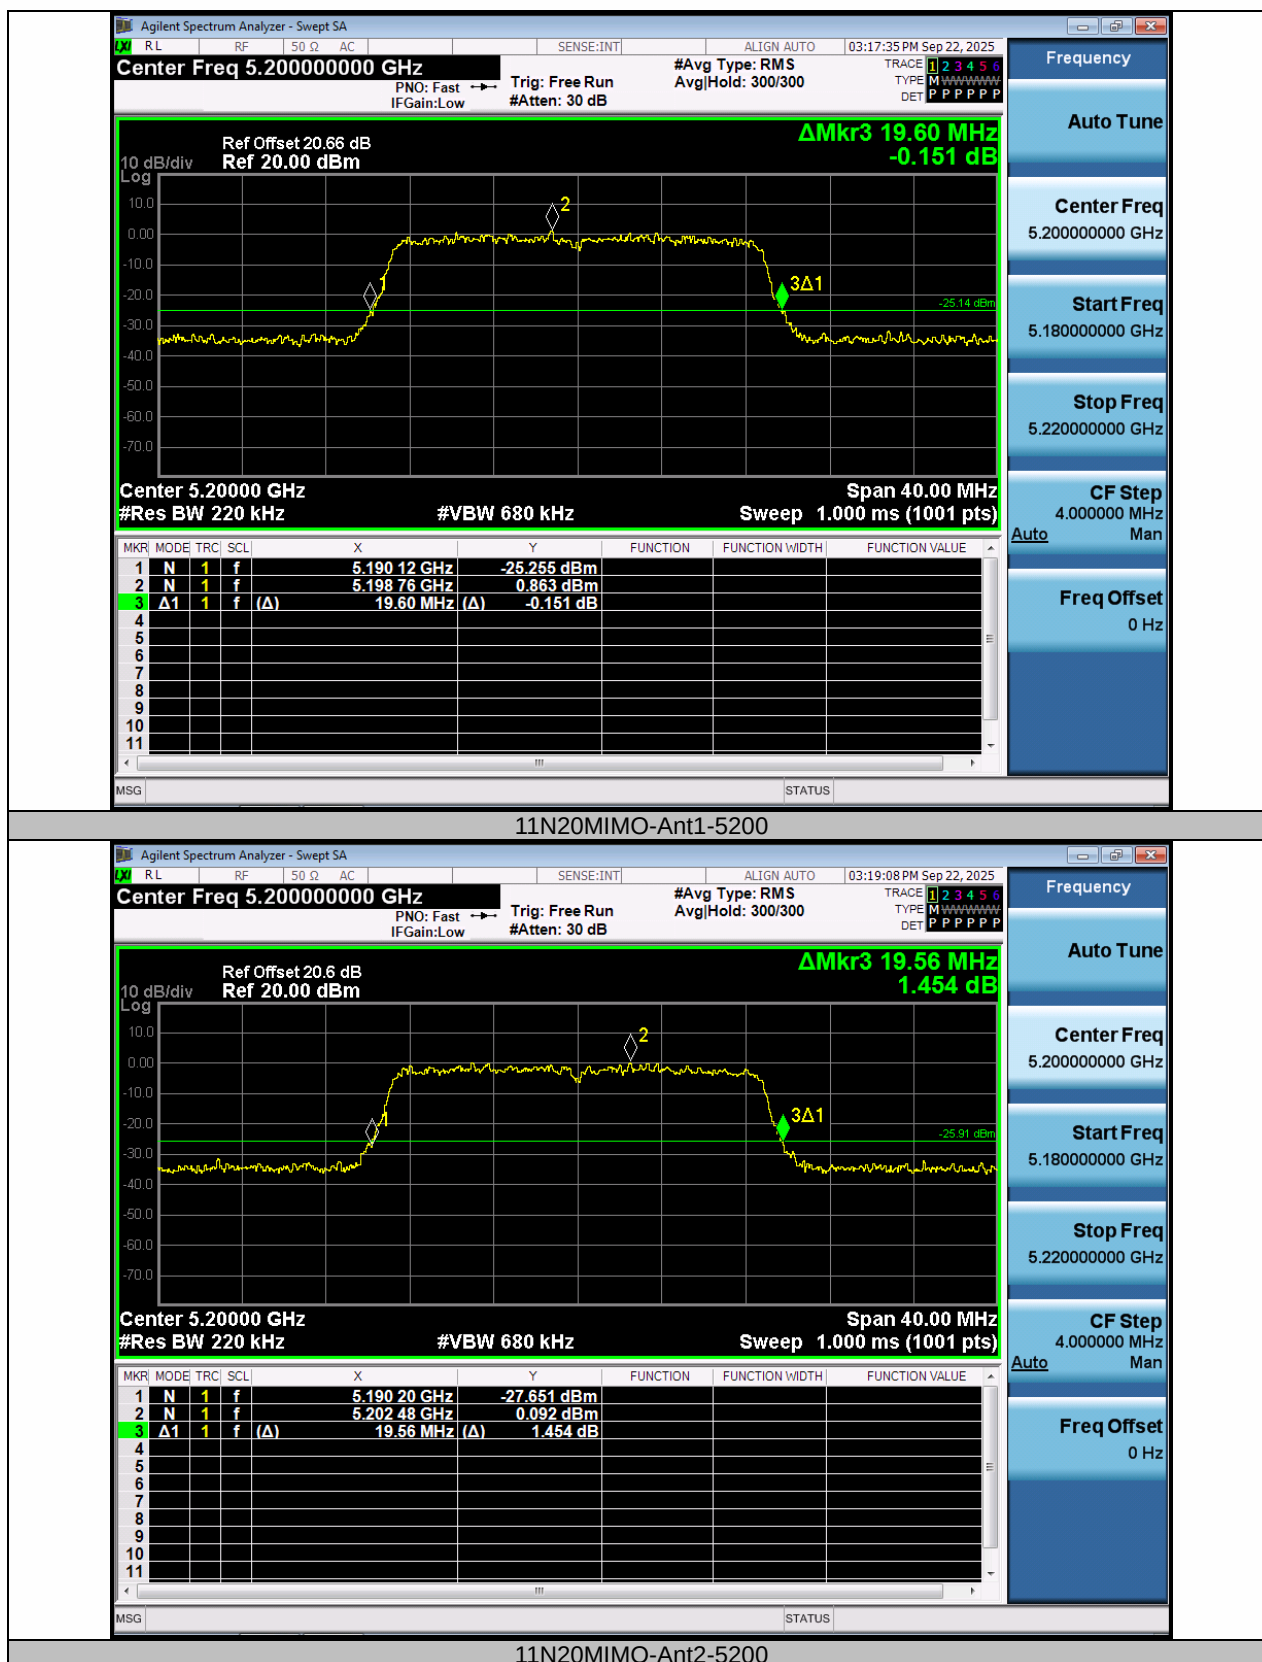

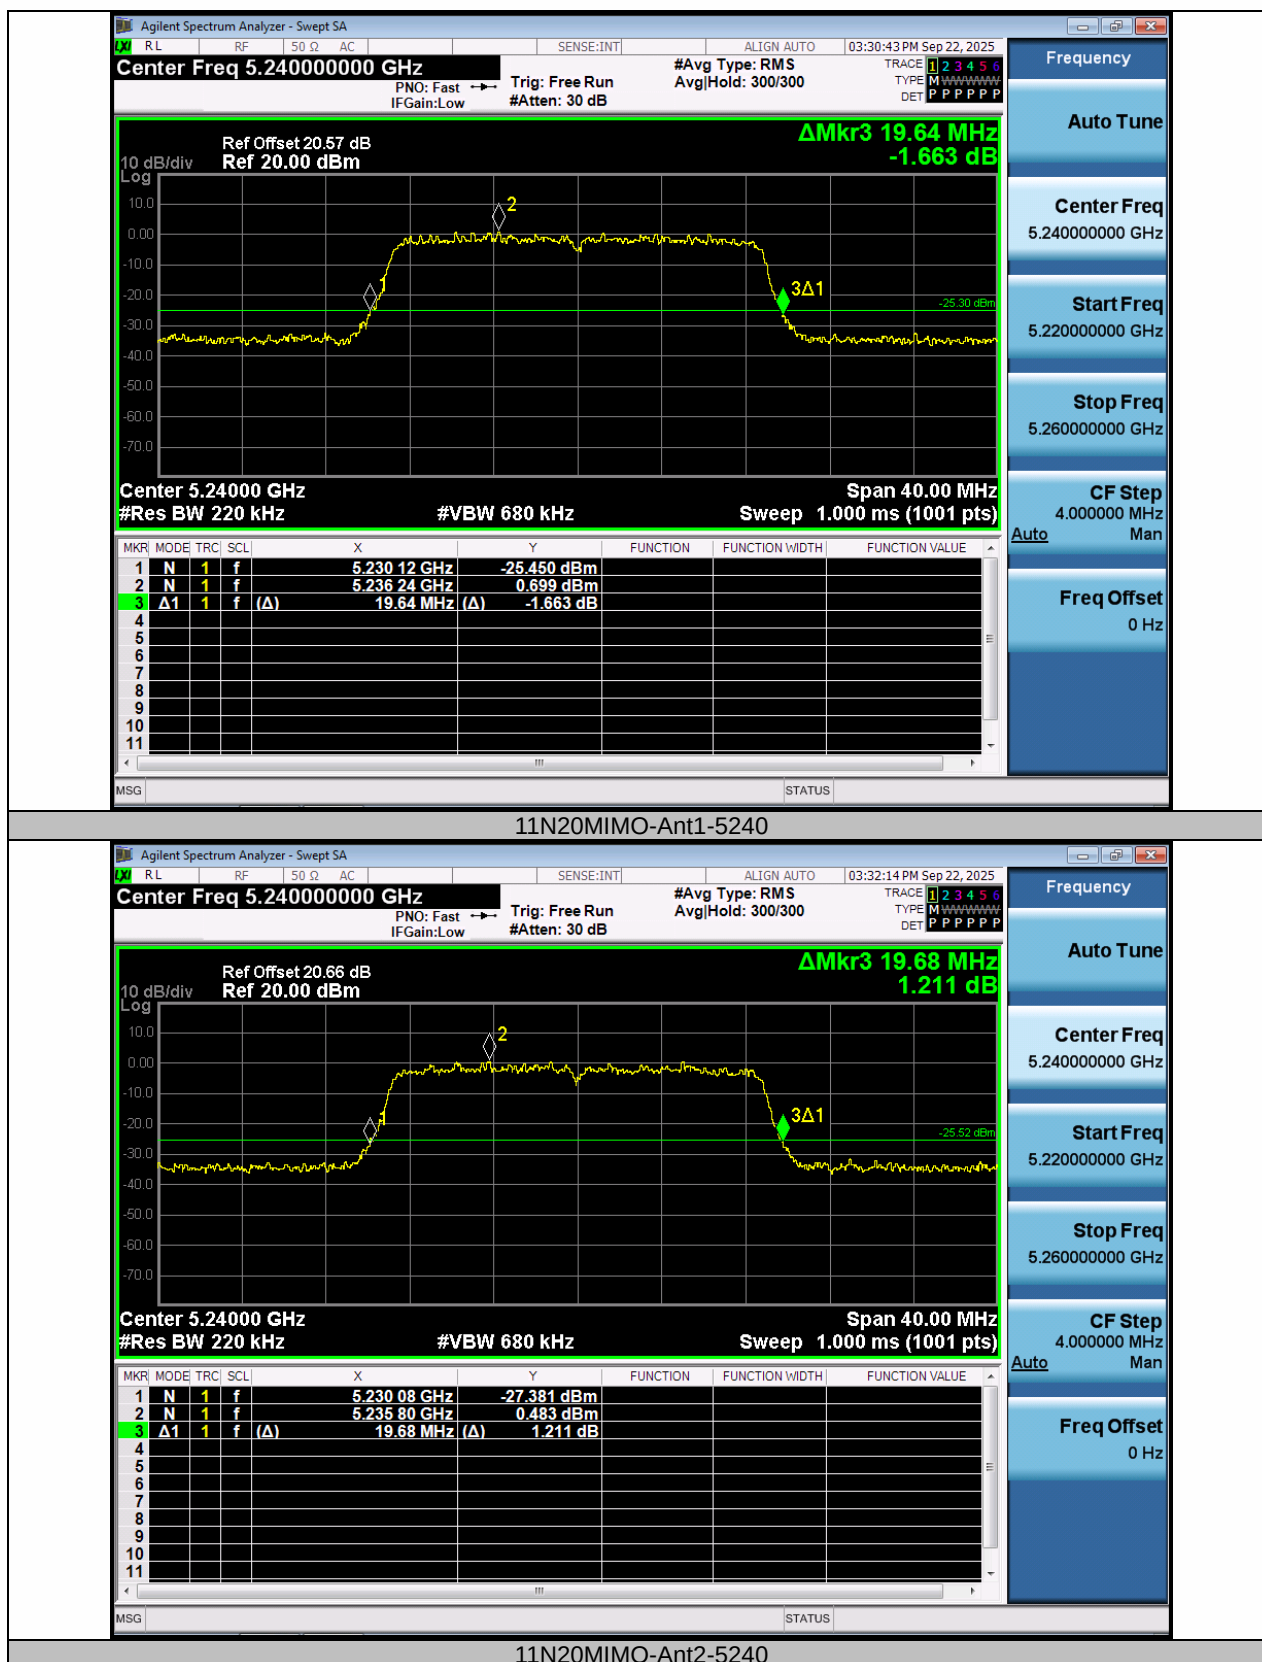

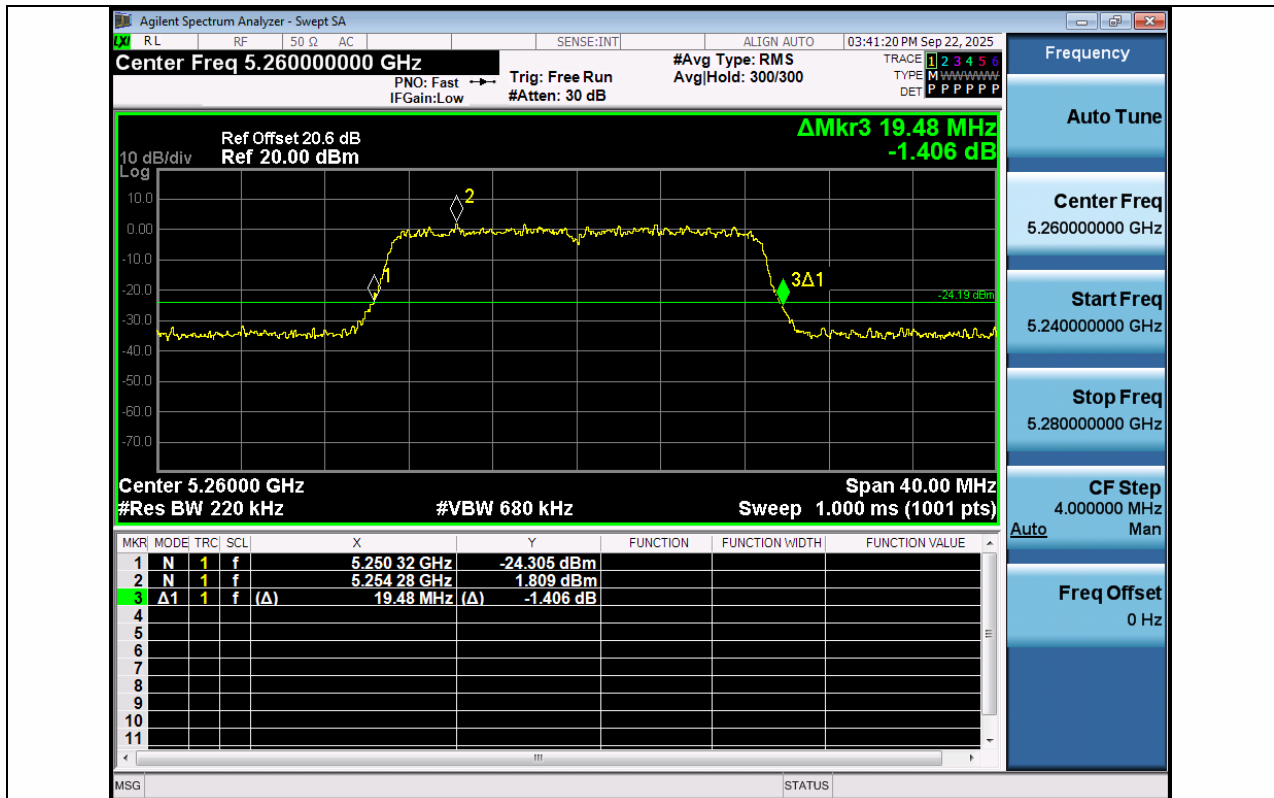

11N20MIMO-Ant1-5260

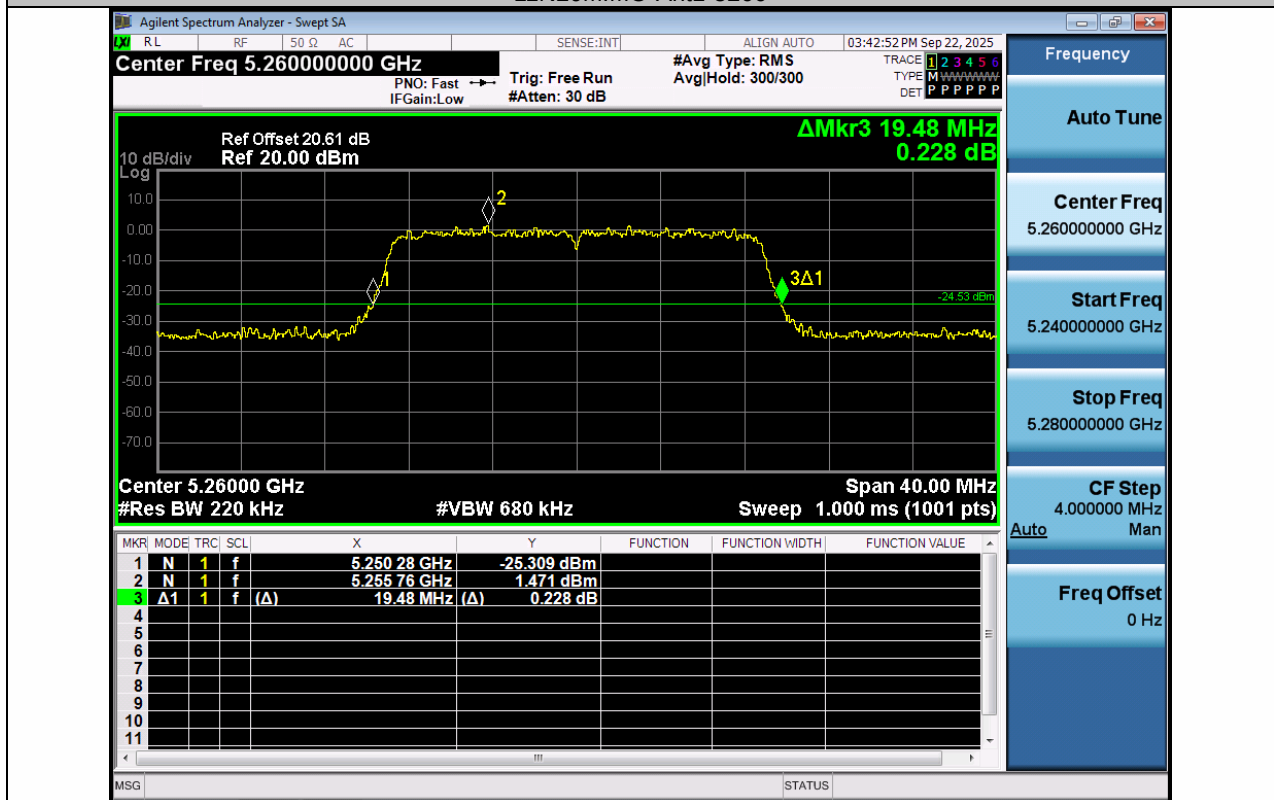

11N20MIMO-Ant2-5260

