

## RF Test Data for 2.4G Wi-Fi (Conducted Measurements)

| General Description of EUT                                                                     |                        |
|------------------------------------------------------------------------------------------------|------------------------|
| EUT Name:                                                                                      | Pan-Tilt Indoor Camera |
| Model:                                                                                         | SF-C2                  |
| Sample ID:                                                                                     | HC-C-202501-0221-01-01 |
| Test Standard:                                                                                 | FCC Part 15.247        |
| Environmental Conditions                                                                       |                        |
| Ambient Temperature:                                                                           | 25°C                   |
| Ambient Humidity:                                                                              | 45%RH                  |
| Test Power Supply:                                                                             | DC 5V                  |
| Test Engineer:                                                                                 | Rick Chen              |
| Note: For a more detailed features description, please refer to the report TBR-C-202501-0021-6 |                        |

## Contents



|                                         |    |
|-----------------------------------------|----|
| 1: DTS Bandwidth.....                   | 3  |
| 1.1 Test Result .....                   | 3  |
| 1.2 Test Graphs .....                   | 4  |
| 2: Occupied Channel Bandwidth .....     | 7  |
| 2.1 Test Result .....                   | 7  |
| 2.2 Test Graphs .....                   | 8  |
| 3: Maximum conducted output power.....  | 11 |
| 3.1 Test Result Average .....           | 11 |
| 4: Maximum power spectral density ..... | 12 |
| 4.1 Test Result .....                   | 12 |
| 4.2 Test Graphs .....                   | 13 |
| 5: Band edge measurements .....         | 16 |
| 5.1 Test Result .....                   | 16 |
| 5.2 Test Graphs .....                   | 17 |
| 6: Conducted Spurious Emission.....     | 19 |
| 6.1 Test Result .....                   | 19 |
| 6.2 Test Graphs .....                   | 21 |
| 7: Duty Cycle .....                     | 30 |
| 7.1 Test Result .....                   | 30 |
| 7.2 Test Graphs .....                   | 31 |
| 8: Emissions in Restricted Bands.....   | 34 |
| 8.1 Test Result .....                   | 34 |
| 8.2 Test Graphs .....                   | 36 |

## 1: DTS Bandwidth

### 1.1 Test Result



| TestMode   | Ant. | Frequency [MHz] | DTS BW [MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|------------|------|-----------------|--------------|---------|---------|------------|---------|
| 11B        | Ant1 | 2412            | 9.08         | 2407.44 | 2416.52 | 0.5        | PASS    |
| 11B        | Ant1 | 2437            | 9.08         | 2432.44 | 2441.52 | 0.5        | PASS    |
| 11B        | Ant1 | 2462            | 9.08         | 2457.44 | 2466.52 | 0.5        | PASS    |
| 11G        | Ant1 | 2412            | 16.40        | 2403.80 | 2420.20 | 0.5        | PASS    |
| 11G        | Ant1 | 2437            | 16.04        | 2429.08 | 2445.12 | 0.5        | PASS    |
| 11G        | Ant1 | 2462            | 16.44        | 2453.72 | 2470.16 | 0.5        | PASS    |
| 11N20SISO  | Ant1 | 2412            | 16.60        | 2403.48 | 2420.08 | 0.5        | PASS    |
| 11N20SISO  | Ant1 | 2437            | 17.68        | 2428.12 | 2445.80 | 0.5        | PASS    |
| 11N20SISO  | Ant1 | 2462            | 17.64        | 2453.20 | 2470.84 | 0.5        | PASS    |
| 11N40SISO  | Ant1 | 2422            | 35.36        | 2404.16 | 2439.52 | 0.5        | PASS    |
| 11N40SISO  | Ant1 | 2437            | 36.48        | 2418.76 | 2455.24 | 0.5        | PASS    |
| 11N40SISO  | Ant1 | 2452            | 36.40        | 2433.76 | 2470.16 | 0.5        | PASS    |
| 11AX20SISO | Ant1 | 2412            | 16.40        | 2403.16 | 2419.56 | 0.5        | PASS    |
| 11AX20SISO | Ant1 | 2437            | 18.84        | 2427.48 | 2446.32 | 0.5        | PASS    |
| 11AX20SISO | Ant1 | 2462            | 18.72        | 2452.48 | 2471.20 | 0.5        | PASS    |
| 11AX40SISO | Ant1 | 2422            | 36.56        | 2404.16 | 2440.72 | 0.5        | PASS    |
| 11AX40SISO | Ant1 | 2437            | 35.44        | 2419.16 | 2454.60 | 0.5        | PASS    |
| 11AX40SISO | Ant1 | 2452            | 33.52        | 2434.48 | 2468.00 | 0.5        | PASS    |

## 1.2 Test Graphs

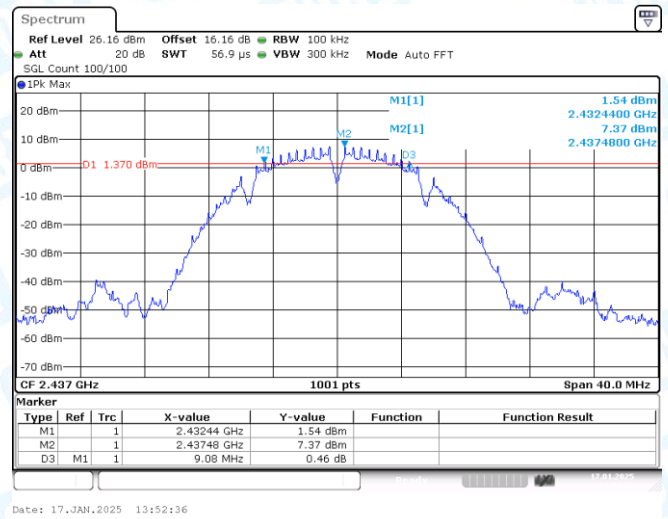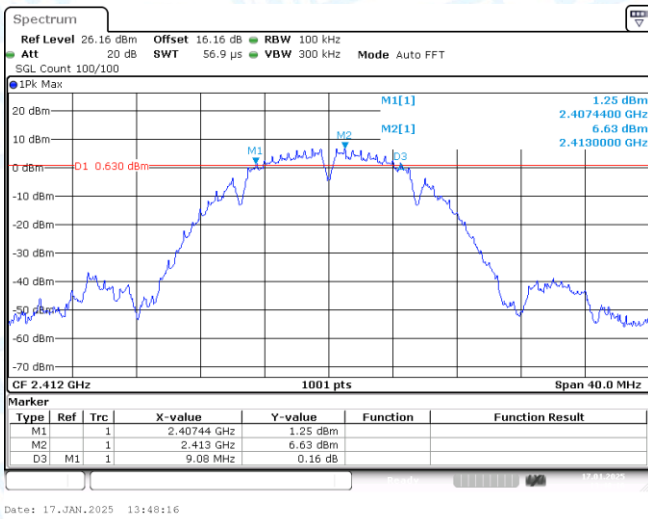



11B-Ant1-2412-PASS

11B-Ant1-2437-PASS

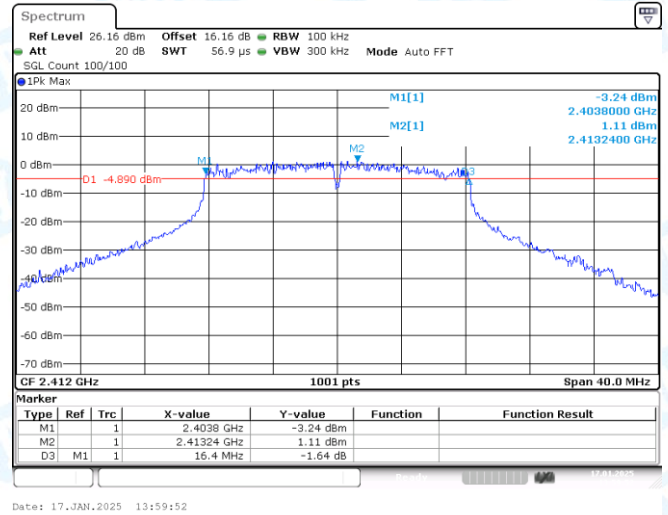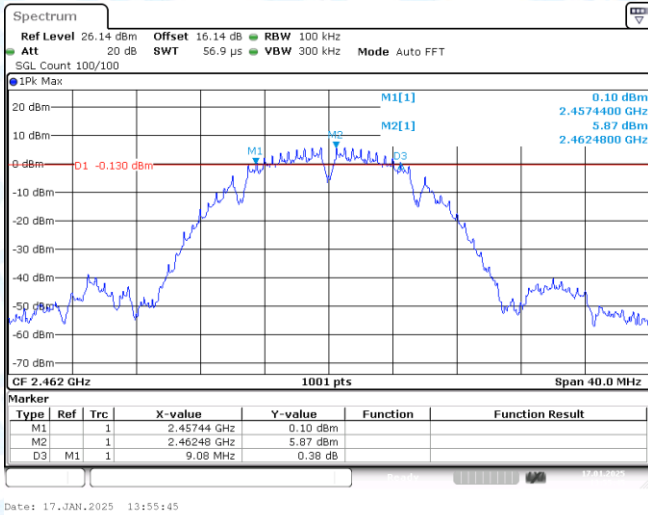


11B-Ant1-2462-PASS

11G-Ant1-2412-PASS

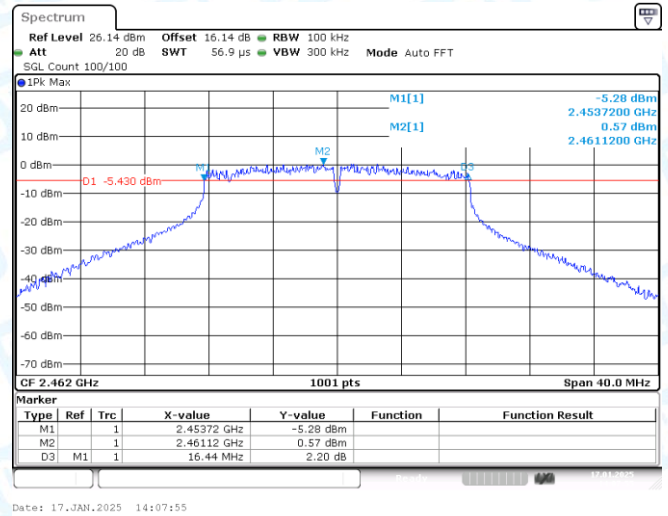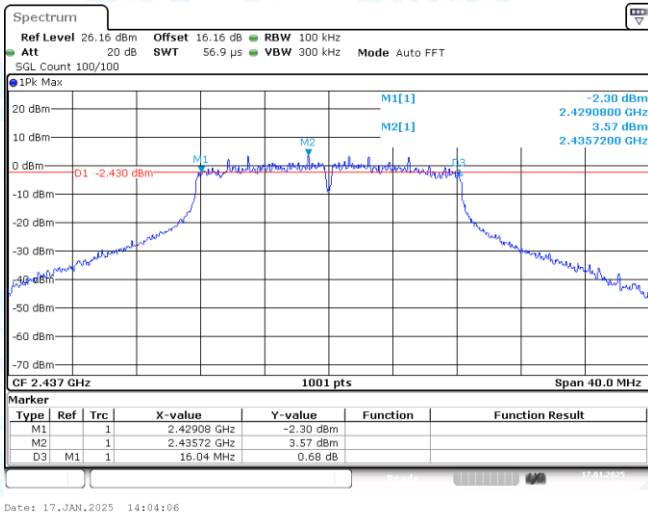


11G-Ant1-2437-PASS


11G-Ant1-2462-PASS

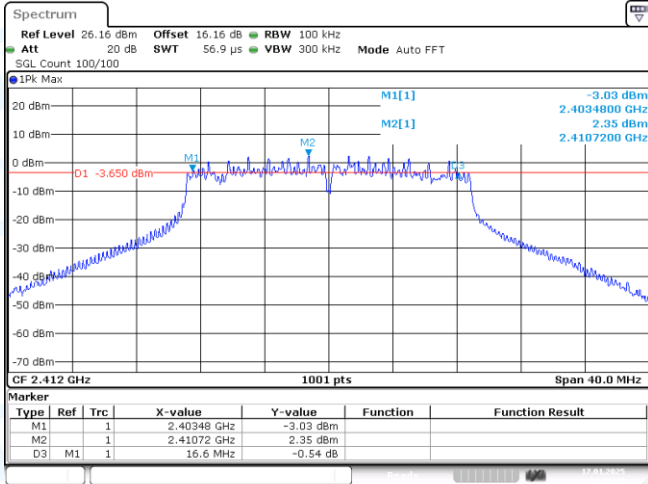


11N20SISO-Ant1-2412-PASS

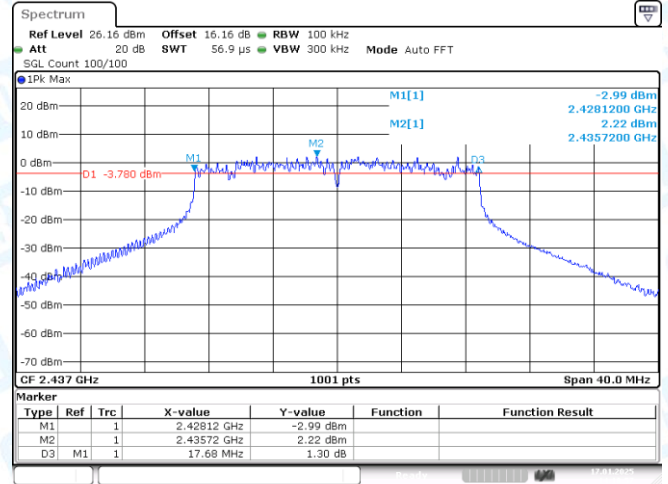


11N20SISO-Ant1-2437-PASS

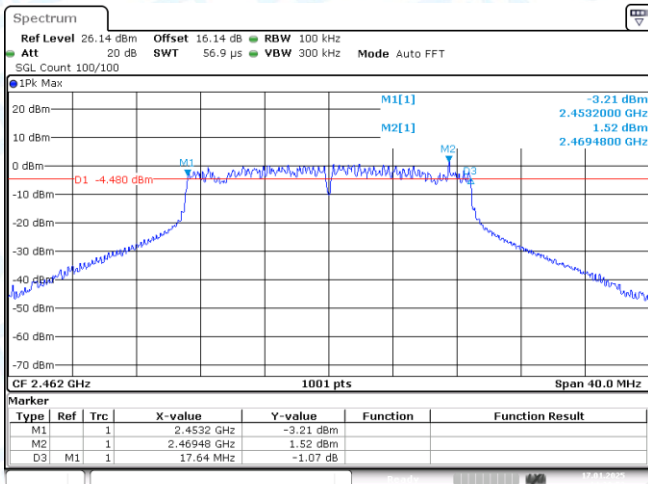


11N20SISO-Ant1-2462-PASS

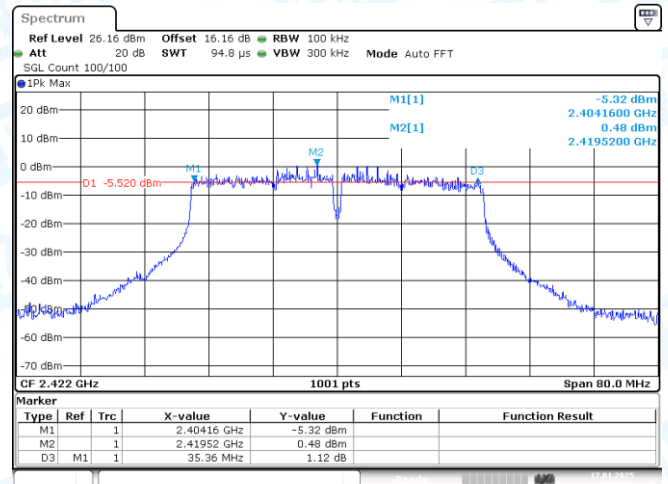


11N40SISO-Ant1-2422-PASS

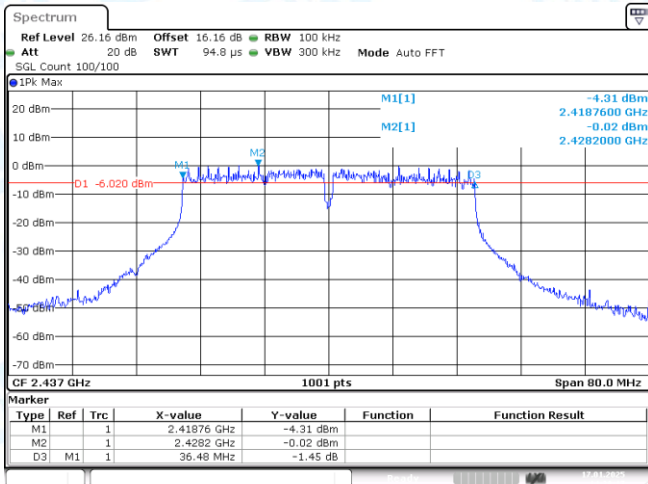


11N40SISO-Ant1-2437-PASS

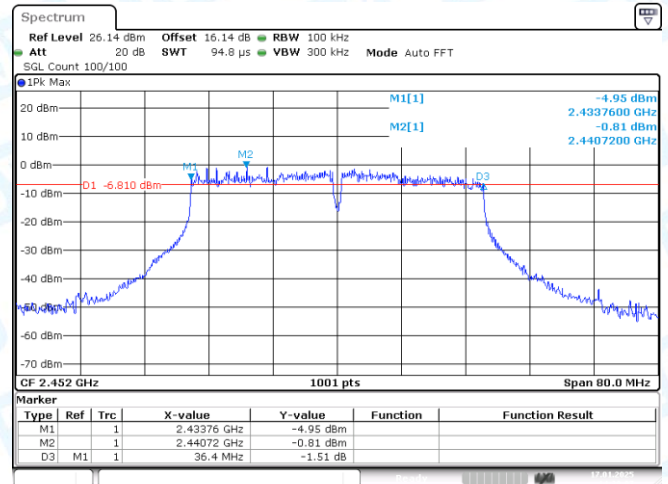


11N40SISO-Ant1-2452-PASS

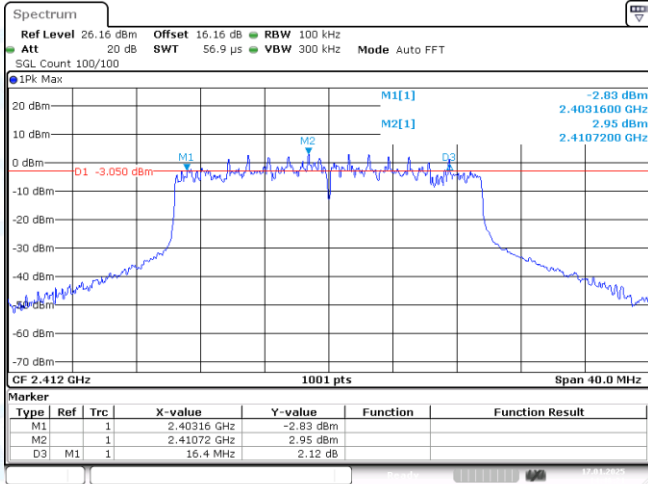


11AX20ISO-Ant1-2412-PASS

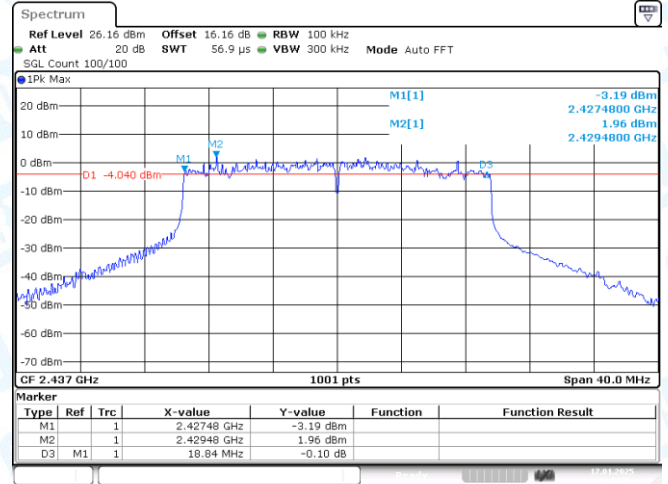


11AX20ISO-Ant1-2437-PASS

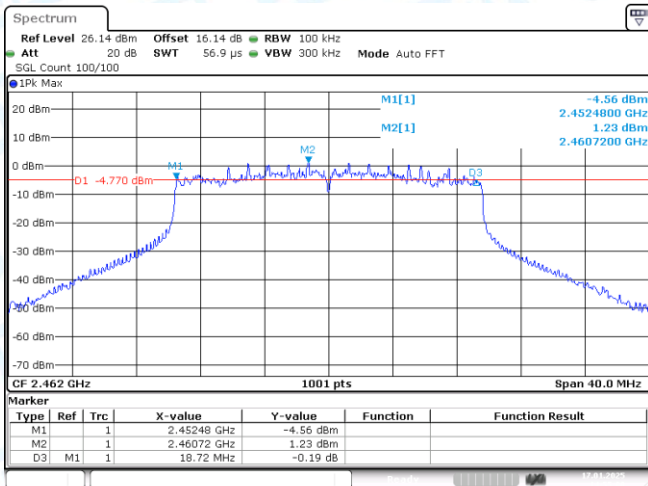


11AX20ISO-Ant1-2462-PASS

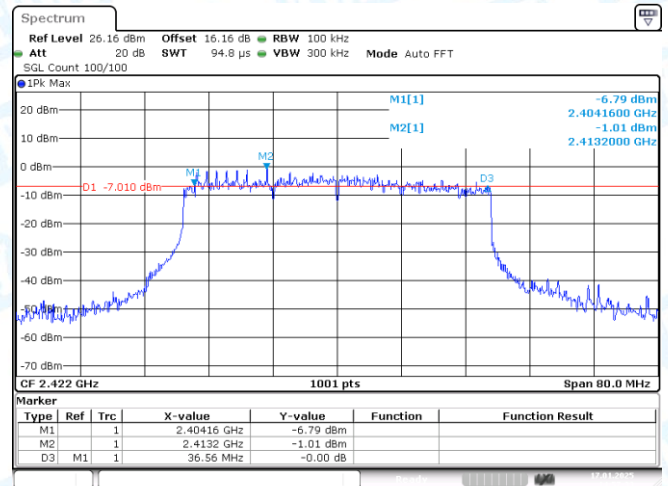

11AX40ISO-Ant1-2422-PASS

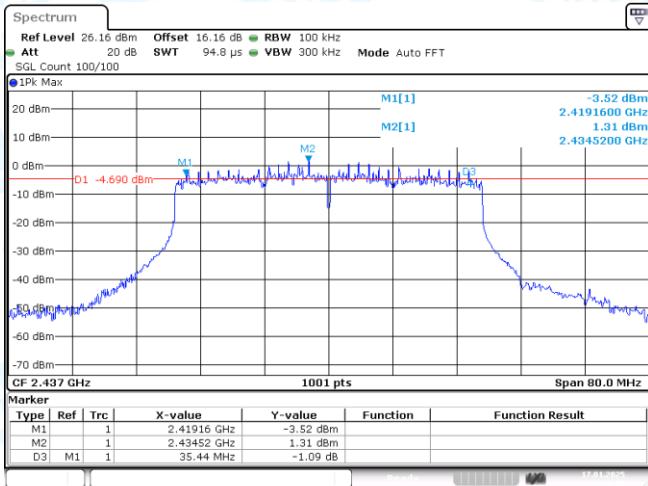

11AX40ISO-Ant1-2437-PASS

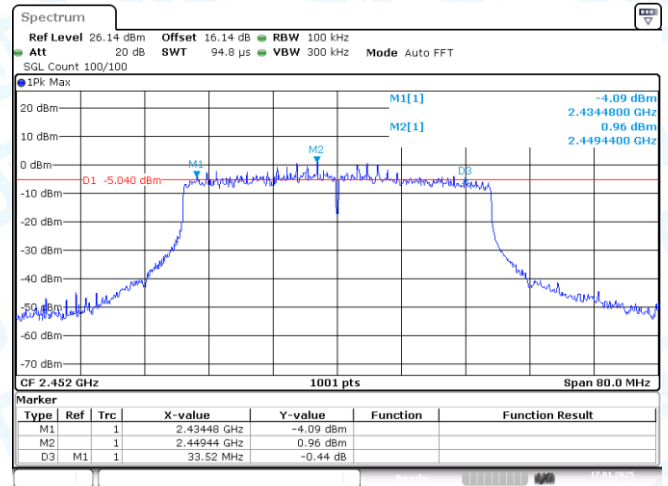


11AX40ISO-Ant1-2452-PASS

## 2: Occupied Channel Bandwidth


### 2.1 Test Result

| TestMode   | Ant. | Channel Frequency[MHz] | OCB [MHz] | FL[MHz]   | FH[MHz]   | Limit[MHz] | Verdict |
|------------|------|------------------------|-----------|-----------|-----------|------------|---------|
| 11B        | Ant1 | 2412                   | 13.187    | 2405.4066 | 2418.5934 | ---        | ---     |
| 11B        | Ant1 | 2437                   | 13.107    | 2430.4466 | 2443.5534 | ---        | ---     |
| 11B        | Ant1 | 2462                   | 13.107    | 2455.4466 | 2468.5534 | ---        | ---     |
| 11G        | Ant1 | 2412                   | 17.662    | 2402.9690 | 2420.6314 | ---        | ---     |
| 11G        | Ant1 | 2437                   | 17.502    | 2428.2088 | 2445.7113 | ---        | ---     |
| 11G        | Ant1 | 2462                   | 16.823    | 2453.4885 | 2470.3117 | ---        | ---     |
| 11N20SISO  | Ant1 | 2412                   | 18.022    | 2402.9291 | 2420.9510 | ---        | ---     |
| 11N20SISO  | Ant1 | 2437                   | 18.062    | 2428.0090 | 2446.0709 | ---        | ---     |
| 11N20SISO  | Ant1 | 2462                   | 17.902    | 2453.0090 | 2470.9111 | ---        | ---     |
| 11N40SISO  | Ant1 | 2422                   | 36.763    | 2403.6983 | 2440.4615 | ---        | ---     |
| 11N40SISO  | Ant1 | 2437                   | 36.923    | 2418.7782 | 2455.7013 | ---        | ---     |
| 11N40SISO  | Ant1 | 2452                   | 36.284    | 2433.7782 | 2470.0619 | ---        | ---     |
| 11AX20SISO | Ant1 | 2412                   | 19.141    | 2402.3696 | 2421.5105 | ---        | ---     |
| 11AX20SISO | Ant1 | 2437                   | 19.061    | 2427.4895 | 2446.5504 | ---        | ---     |
| 11AX20SISO | Ant1 | 2462                   | 19.061    | 2452.3696 | 2471.4306 | ---        | ---     |
| 11AX40SISO | Ant1 | 2422                   | 38.042    | 2402.8991 | 2440.9411 | ---        | ---     |
| 11AX40SISO | Ant1 | 2437                   | 37.802    | 2417.9790 | 2455.7812 | ---        | ---     |
| 11AX40SISO | Ant1 | 2452                   | 37.802    | 2432.9790 | 2470.7812 | ---        | ---     |


## 2.2 Test Graphs

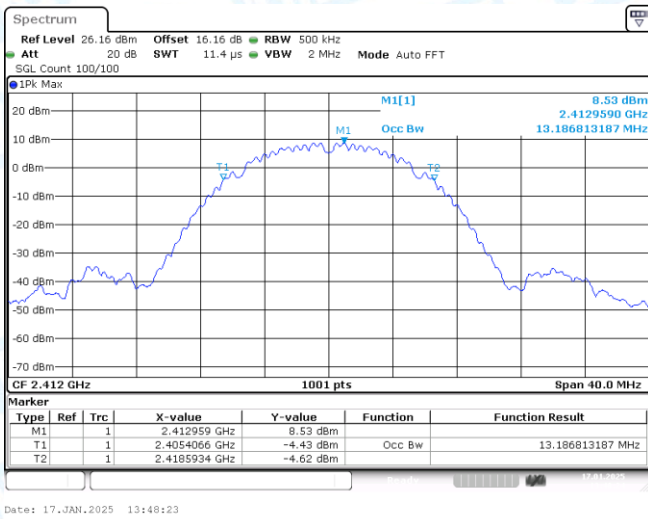


11B-Ant1-2412

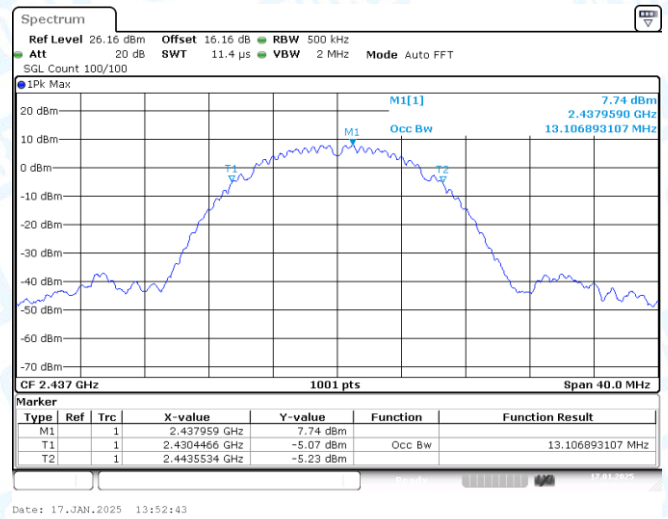


11B-Ant1-2437

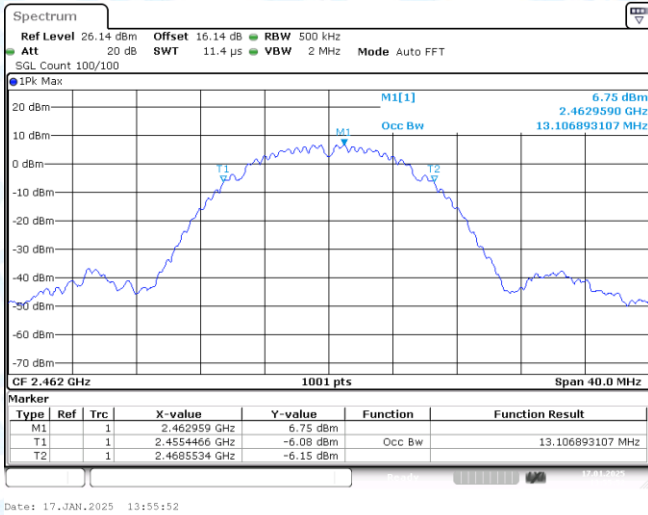


11B-Ant1-2462

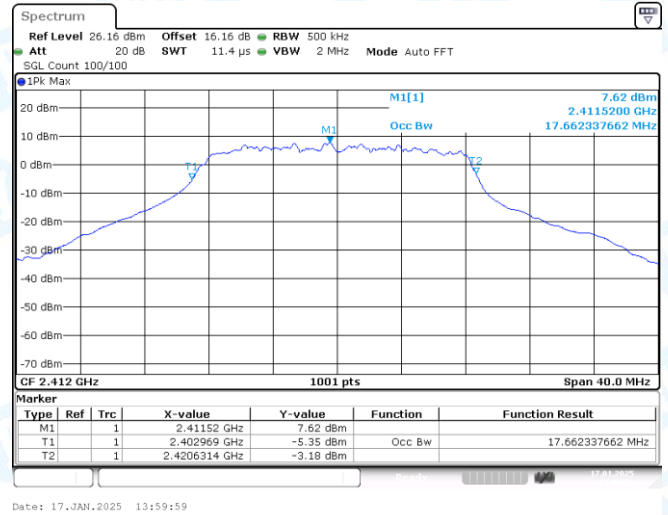


11G-Ant1-2412

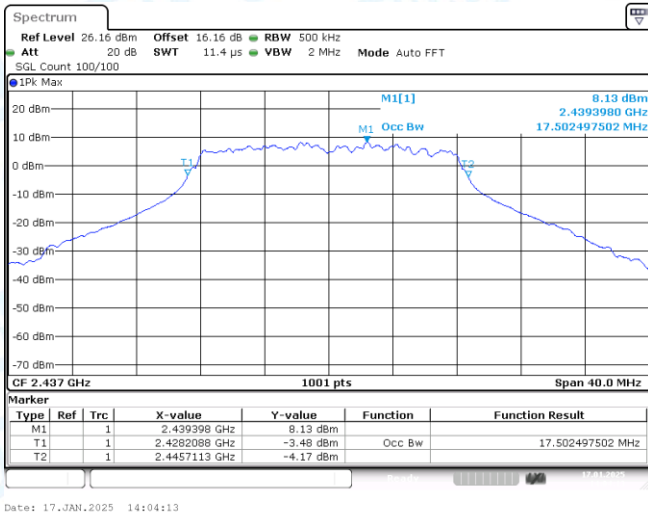


11G-Ant1-2437

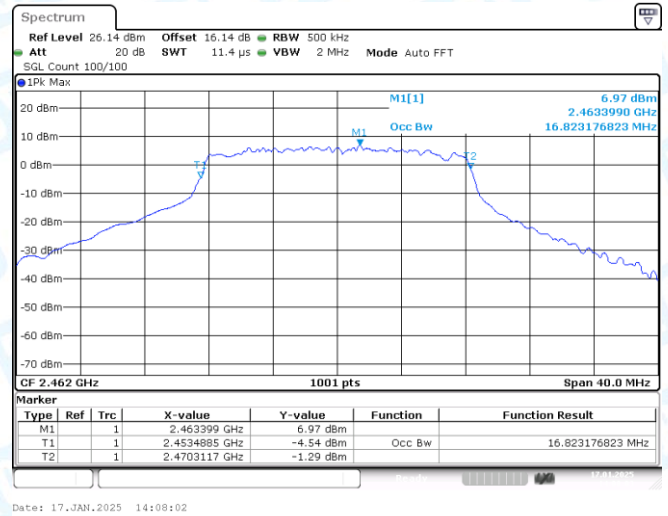


11G-Ant1-2462

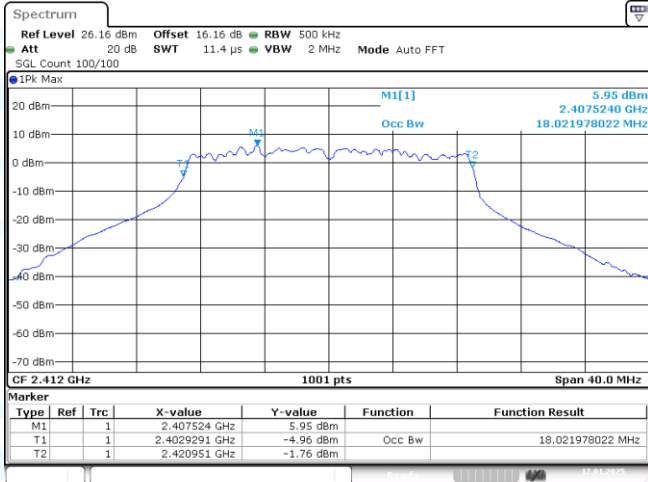


11N20SISO-Ant1-2412

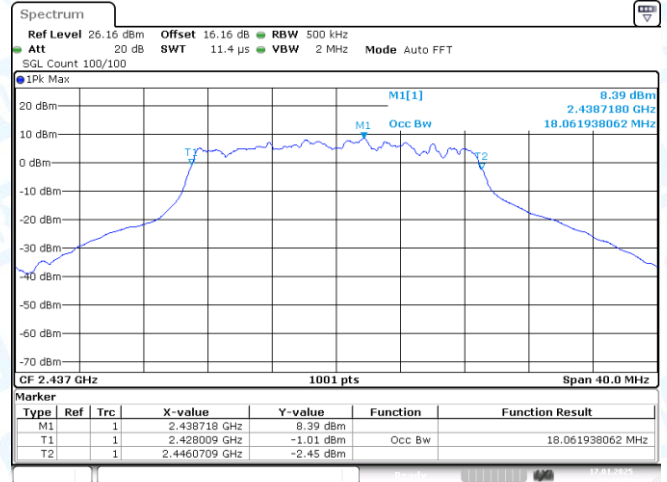


11N20SISO-Ant1-2437

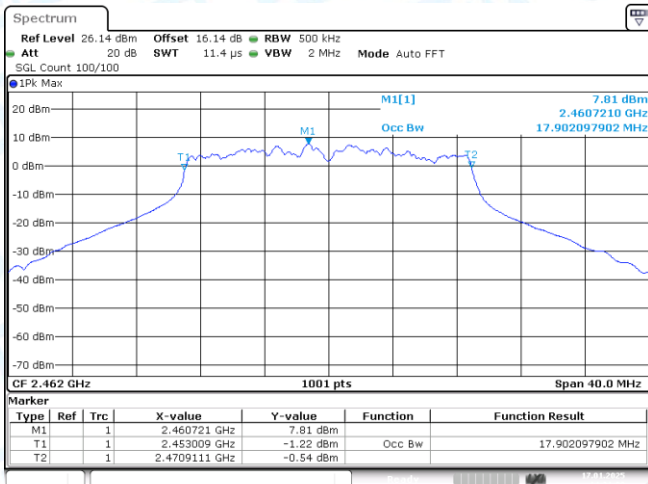


11N20SISO-Ant1-2462

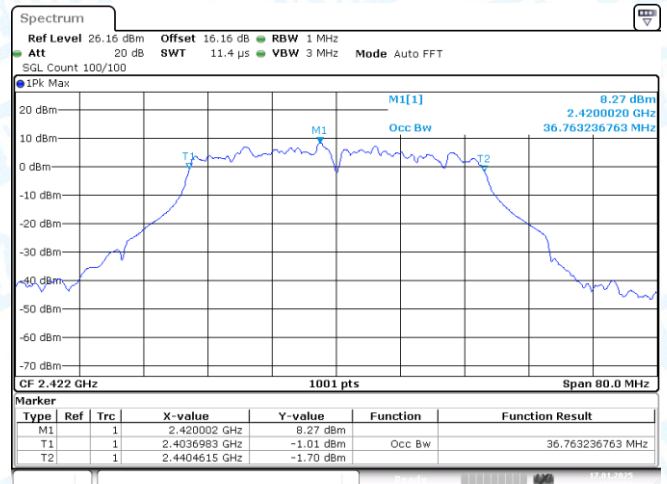


11N40SISO-Ant1-2422

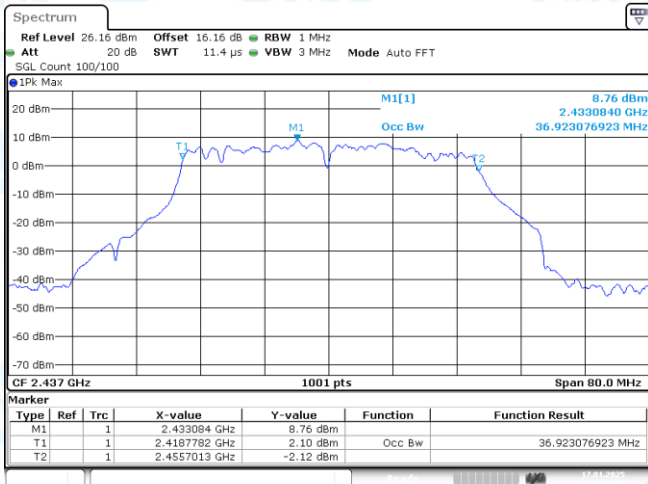


11N40SISO-Ant1-2437

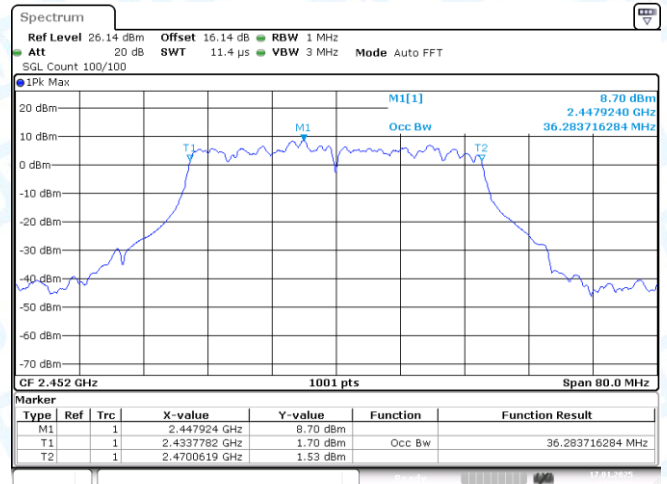


11N40SISO-Ant1-2452

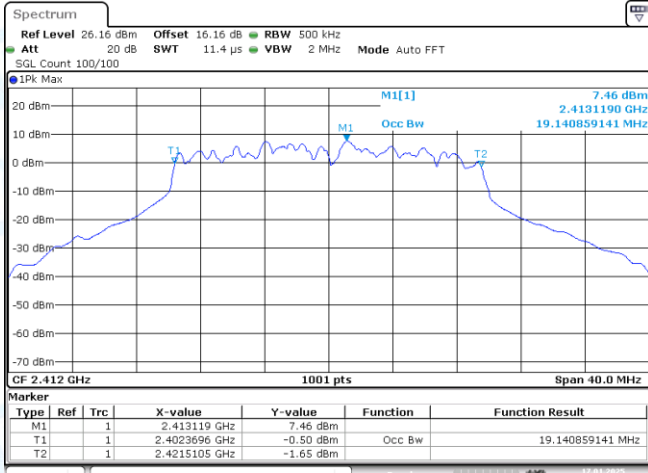


11AX20SISO-Ant1-2412

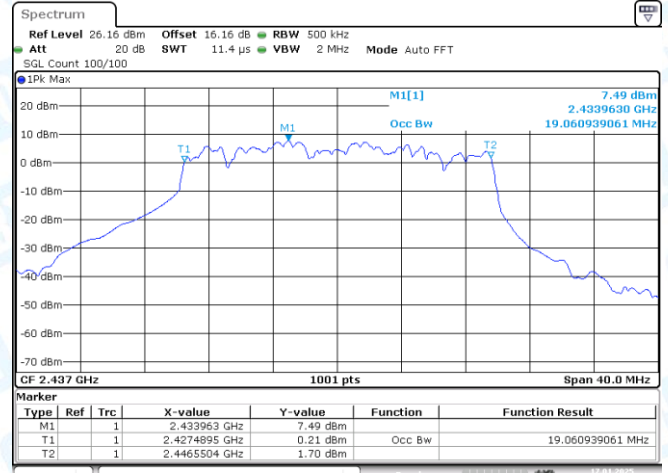


11AX20SISO-Ant1-2437

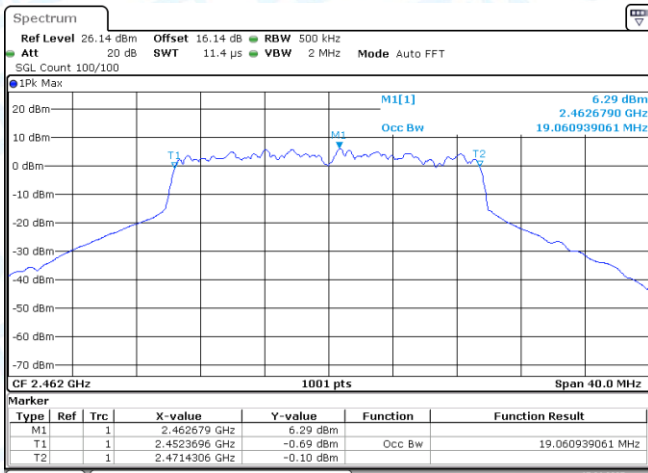


11AX20SISO-Ant1-2462

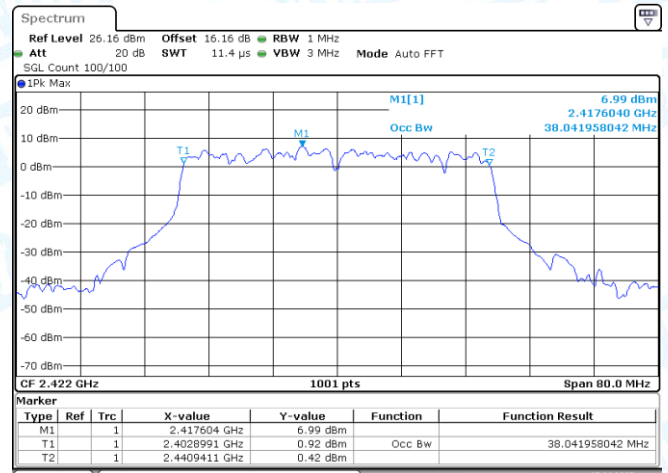

11AX40SISO-Ant1-2422

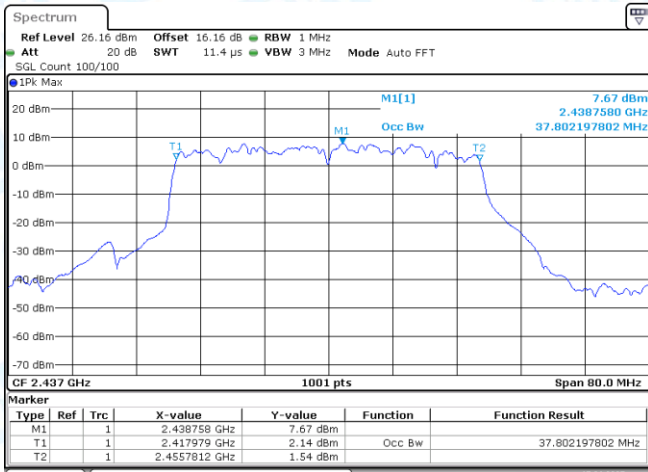

11AX40SISO-Ant1-2437

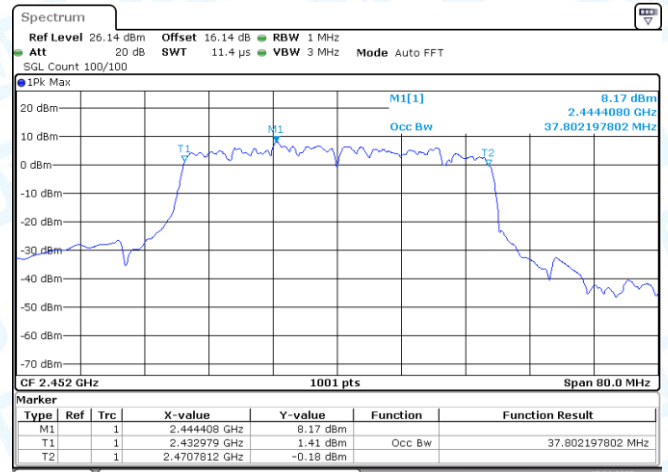

11AX40SISO-Ant1-2452

### 3: Maximum conducted output power

#### 3.1 Test Result Average

| Test Mode  | Ant. | Frequency [MHz] | Result [dBm] | Limit [dBm] | Verdict |
|------------|------|-----------------|--------------|-------------|---------|
| 11B        | Ant1 | 2412            | 16.05        | ≤30.00      | PASS    |
| 11B        | Ant1 | 2437            | 15.21        | ≤30.00      | PASS    |
| 11B        | Ant1 | 2462            | 14.33        | ≤30.00      | PASS    |
| 11G        | Ant1 | 2412            | 14.58        | ≤30.00      | PASS    |
| 11G        | Ant1 | 2437            | 14.78        | ≤30.00      | PASS    |
| 11G        | Ant1 | 2462            | 14.31        | ≤30.00      | PASS    |
| 11N20SISO  | Ant1 | 2412            | 12.28        | ≤30.00      | PASS    |
| 11N20SISO  | Ant1 | 2437            | 14.40        | ≤30.00      | PASS    |
| 11N20SISO  | Ant1 | 2462            | 13.43        | ≤30.00      | PASS    |
| 11N40SISO  | Ant1 | 2422            | 12.90        | ≤30.00      | PASS    |
| 11N40SISO  | Ant1 | 2437            | 14.49        | ≤30.00      | PASS    |
| 11N40SISO  | Ant1 | 2452            | 14.02        | ≤30.00      | PASS    |
| 11AX20SISO | Ant1 | 2412            | 12.16        | ≤30.00      | PASS    |
| 11AX20SISO | Ant1 | 2437            | 12.15        | ≤30.00      | PASS    |
| 11AX20SISO | Ant1 | 2462            | 12.90        | ≤30.00      | PASS    |
| 11AX40SISO | Ant1 | 2422            | 10.99        | ≤30.00      | PASS    |
| 11AX40SISO | Ant1 | 2437            | 14.40        | ≤30.00      | PASS    |
| 11AX40SISO | Ant1 | 2452            | 14.00        | ≤30.00      | PASS    |

Note: The Duty Cycle Factor is compensated in the graph.


## 4: Maximum power spectral density

### 4.1 Test Result

| TestMode   | Ant. | Frequency[MHz] | Result[dBm/3kHz] | Limit[dBm/3kHz] | Verdict |
|------------|------|----------------|------------------|-----------------|---------|
| 11B        | Ant1 | 2412           | -15.08           | ≤8.00           | PASS    |
| 11B        | Ant1 | 2437           | -15.81           | ≤8.00           | PASS    |
| 11B        | Ant1 | 2462           | -16.56           | ≤8.00           | PASS    |
| 11G        | Ant1 | 2412           | -18.79           | ≤8.00           | PASS    |
| 11G        | Ant1 | 2437           | -17.46           | ≤8.00           | PASS    |
| 11G        | Ant1 | 2462           | -18.34           | ≤8.00           | PASS    |
| 11N20SISO  | Ant1 | 2412           | -19.66           | ≤8.00           | PASS    |
| 11N20SISO  | Ant1 | 2437           | -17.64           | ≤8.00           | PASS    |
| 11N20SISO  | Ant1 | 2462           | -17.36           | ≤8.00           | PASS    |
| 11N40SISO  | Ant1 | 2422           | -20.98           | ≤8.00           | PASS    |
| 11N40SISO  | Ant1 | 2437           | -19.05           | ≤8.00           | PASS    |
| 11N40SISO  | Ant1 | 2452           | -20.08           | ≤8.00           | PASS    |
| 11AX20SISO | Ant1 | 2412           | -19.60           | ≤8.00           | PASS    |
| 11AX20SISO | Ant1 | 2437           | -17.45           | ≤8.00           | PASS    |
| 11AX20SISO | Ant1 | 2462           | -16.76           | ≤8.00           | PASS    |
| 11AX40SISO | Ant1 | 2422           | -21.78           | ≤8.00           | PASS    |
| 11AX40SISO | Ant1 | 2437           | -18.66           | ≤8.00           | PASS    |
| 11AX40SISO | Ant1 | 2452           | -18.60           | ≤8.00           | PASS    |


Note: The Duty Cycle Factor is compensated in the graph.

## 4.2 Test Graphs

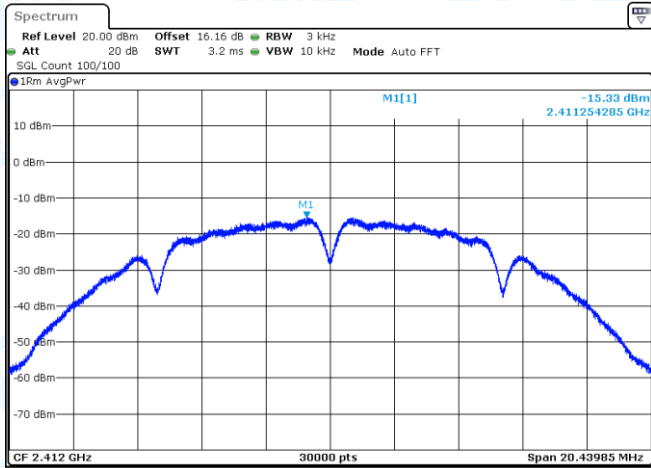


Date: 17, JAN, 2025 13:50:52

11B-Ant1-2412-PASS

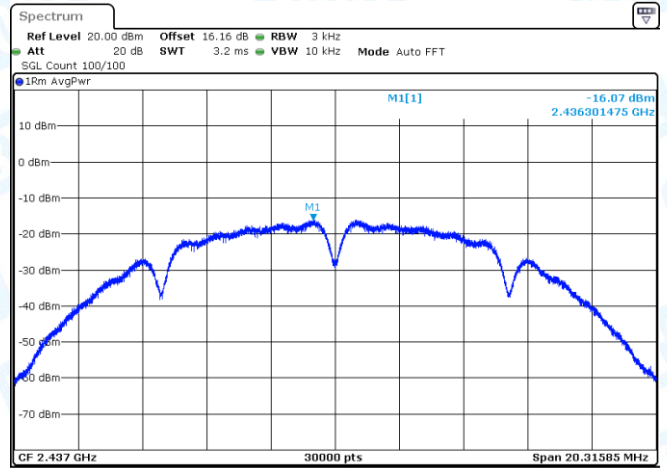


Date: 17, JAN, 2025 13:53:43

11B-Ant1-2437-PASS

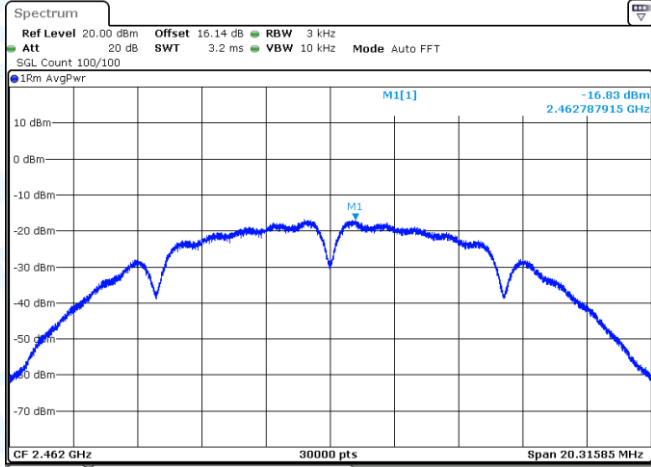


Date: 17, JAN, 2025 13:57:56

11B-Ant1-2462-PASS

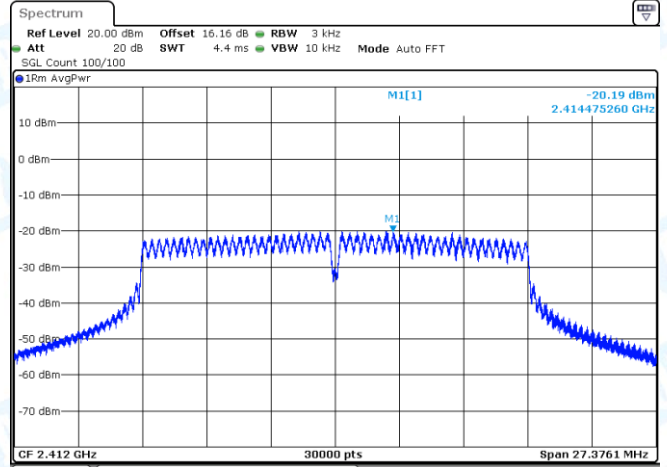


Date: 17, JAN, 2025 14:01:21

11G-Ant1-2412-PASS

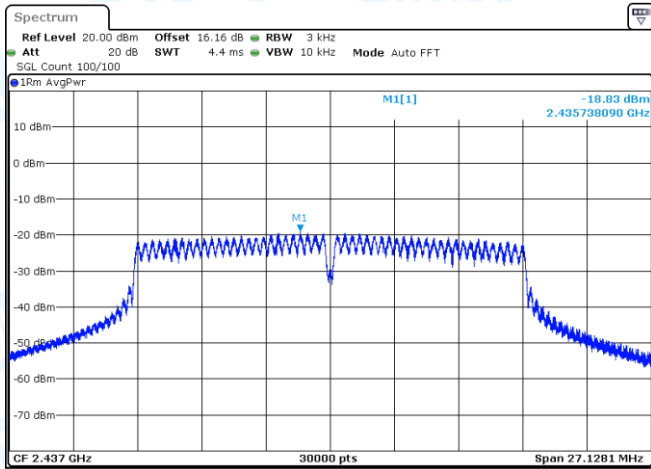


Date: 17, JAN, 2025 14:05:25

11G-Ant1-2437-PASS

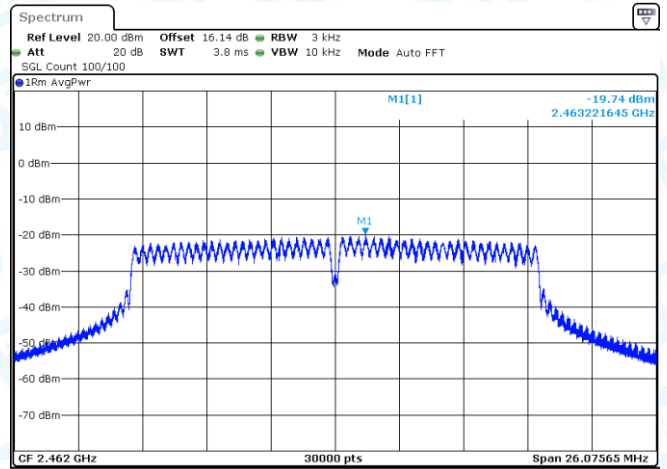


Date: 17, JAN, 2025 14:09:08

11G-Ant1-2462-PASS

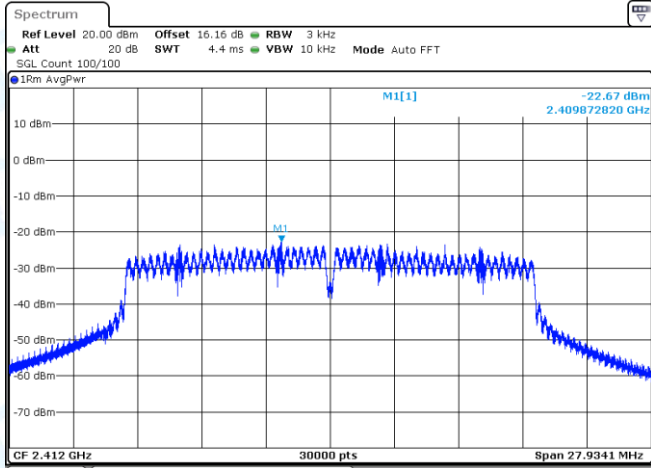


Date: 17.JAN.2025 14:16:53

11N20SISO-Ant1-2412-PASS

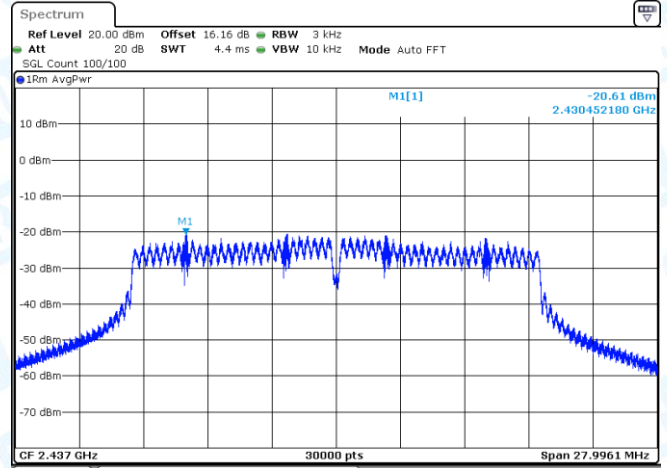


Date: 17.JAN.2025 14:19:40

11N20SISO-Ant1-2437-PASS

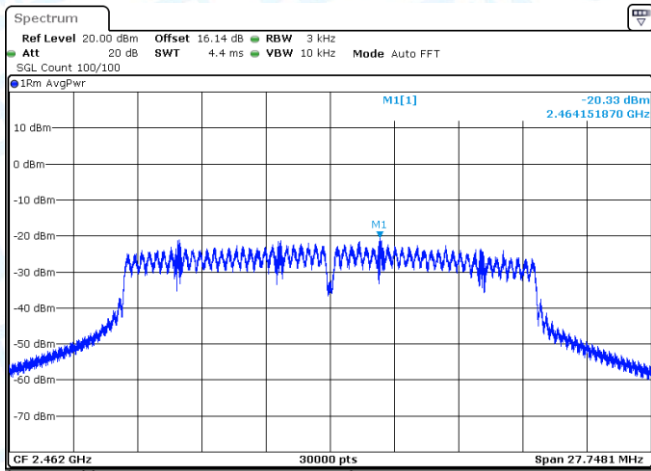


Date: 17.JAN.2025 14:21:37

11N20SISO-Ant1-2462-PASS

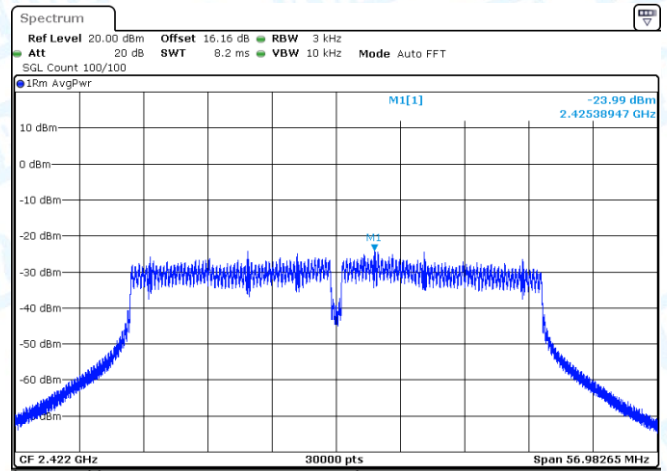


Date: 17.JAN.2025 14:24:26

11N40SISO-Ant1-2422-PASS

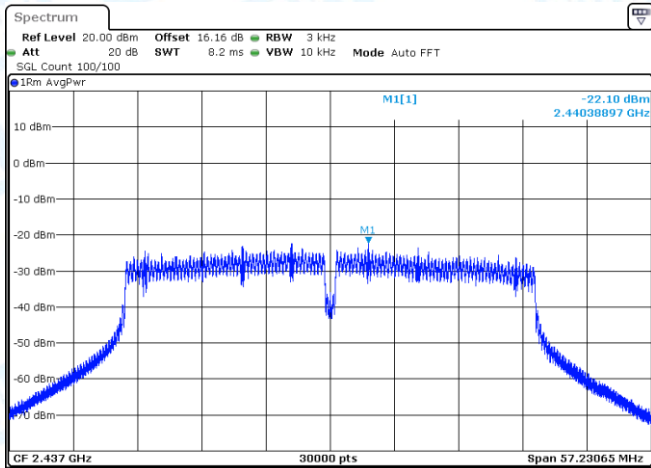


Date: 17.JAN.2025 14:28:59

11N40SISO-Ant1-2437-PASS

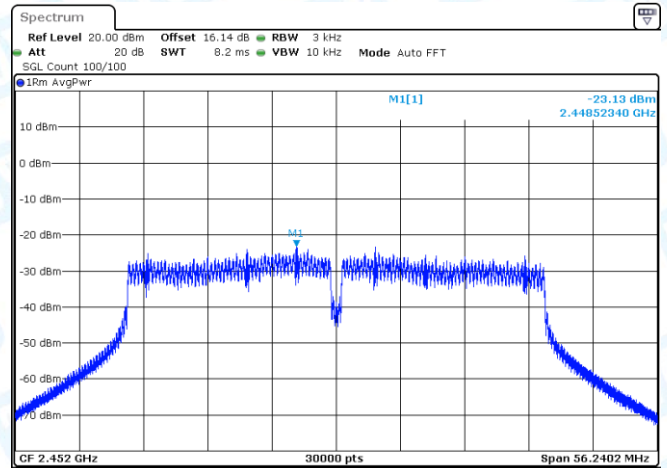


Date: 17.JAN.2025 14:30:48

11N40SISO-Ant1-2452-PASS

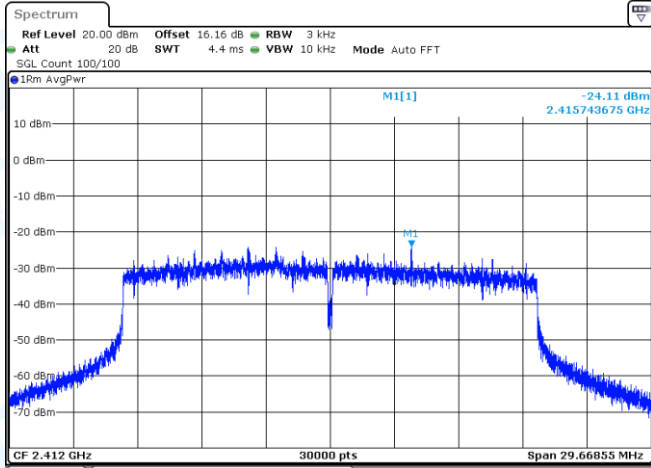


Date: 17, JAN, 2025 14:49:31

11AX20SISO-Ant1-2412-PASS

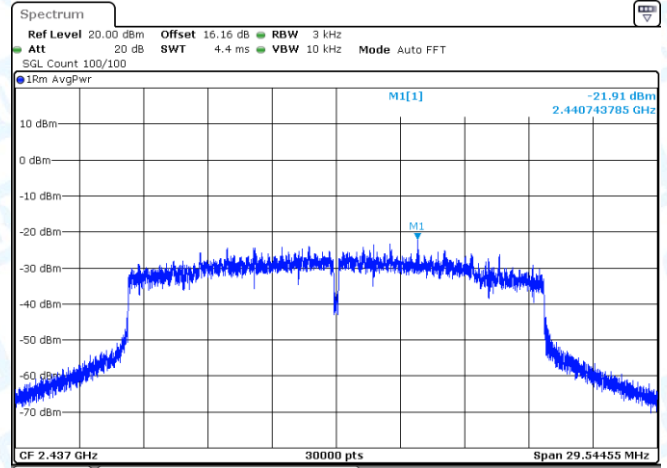


Date: 17, JAN, 2025 14:54:02

11AX20SISO-Ant1-2437-PASS

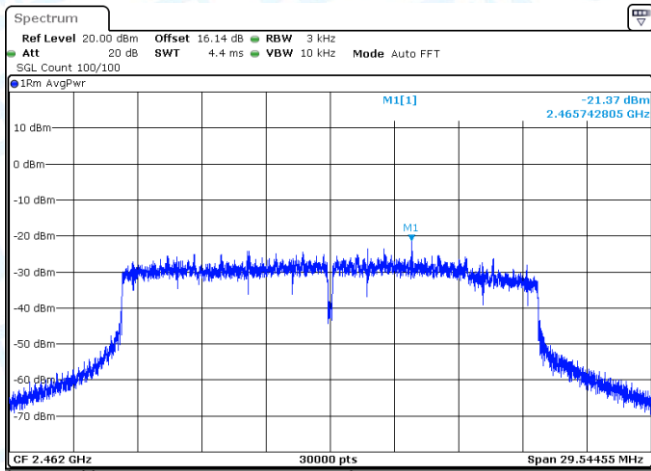


Date: 17, JAN, 2025 14:55:43

11AX20SISO-Ant1-2462-PASS

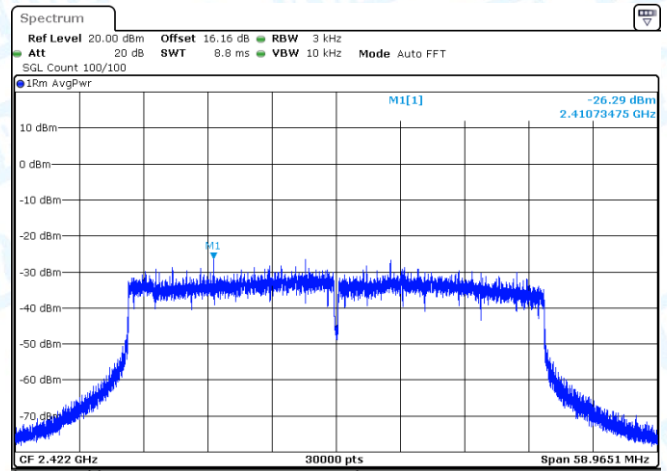


Date: 17, JAN, 2025 14:58:12

11AX40SISO-Ant1-2422-PASS

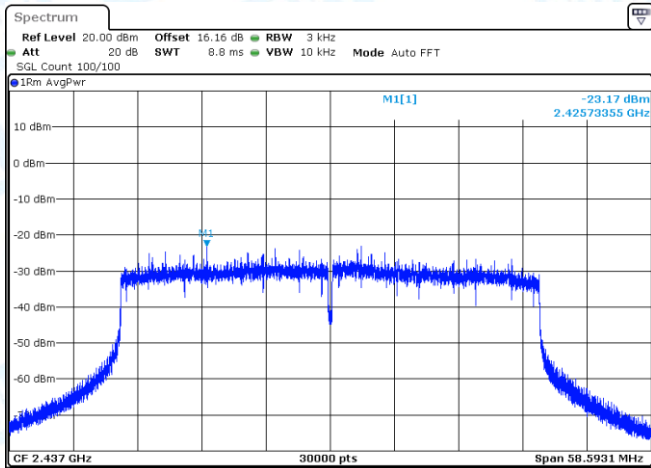

Date: 17, JAN, 2025 15:00:42

11AX40SISO-Ant1-2437-PASS

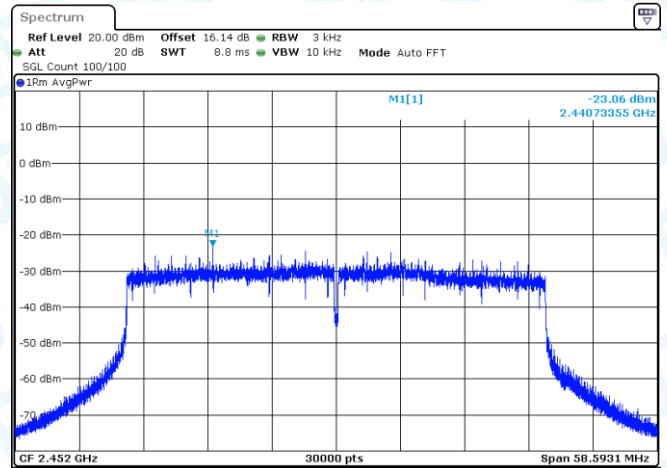

Date: 17, JAN, 2025 15:03:28


11AX40SISO-Ant1-2452-PASS

## 5: Band edge measurements


### 5.1 Test Result

| TestMode   | Ant. | ChName | Frequency[MHz] | RefLevel[dBm] | Result[dBm] | Limit[dBm] | Verdict |
|------------|------|--------|----------------|---------------|-------------|------------|---------|
| 11B        | Ant1 | Low    | 2412           | 6.42          | -39.18      | ≤-23.58    | PASS    |
| 11B        | Ant1 | High   | 2462           | 5.98          | -51.66      | ≤-24.02    | PASS    |
| 11G        | Ant1 | Low    | 2412           | 2.92          | -27.88      | ≤-27.08    | PASS    |
| 11G        | Ant1 | High   | 2462           | 0.45          | -47.37      | ≤-29.55    | PASS    |
| 11N20SISO  | Ant1 | Low    | 2412           | 2.23          | -28.14      | ≤-27.77    | PASS    |
| 11N20SISO  | Ant1 | High   | 2462           | 3.29          | -47.78      | ≤-26.71    | PASS    |
| 11N40SISO  | Ant1 | Low    | 2422           | -1.43         | -33.96      | ≤-31.43    | PASS    |
| 11N40SISO  | Ant1 | High   | 2452           | 0.68          | -44.46      | ≤-29.32    | PASS    |
| 11AX20SISO | Ant1 | Low    | 2412           | 2.83          | -32.52      | ≤-27.17    | PASS    |
| 11AX20SISO | Ant1 | High   | 2462           | 1.24          | -50.79      | ≤-28.76    | PASS    |
| 11AX40SISO | Ant1 | Low    | 2422           | 0.54          | -35.83      | ≤-29.46    | PASS    |
| 11AX40SISO | Ant1 | High   | 2452           | -1.85         | -47.07      | ≤-31.85    | PASS    |


## 5.2 Test Graphs

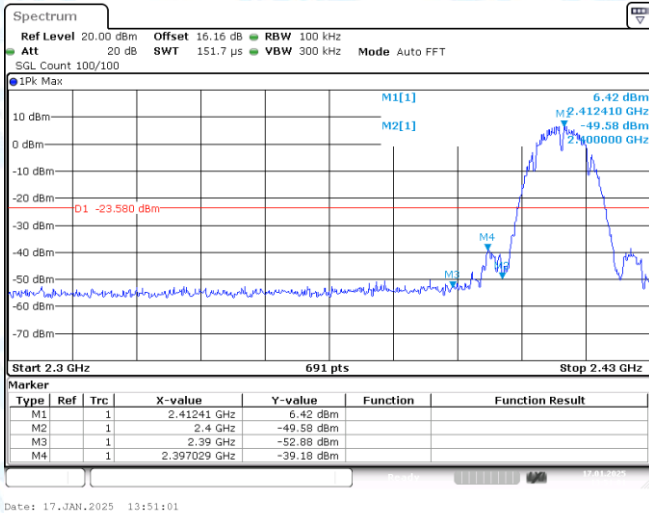


11B-Ant1-2412-PASS

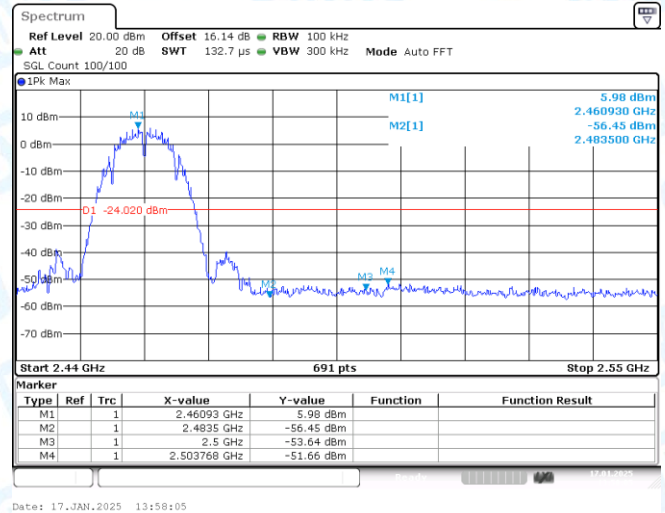


11B-Ant1-2462-PASS

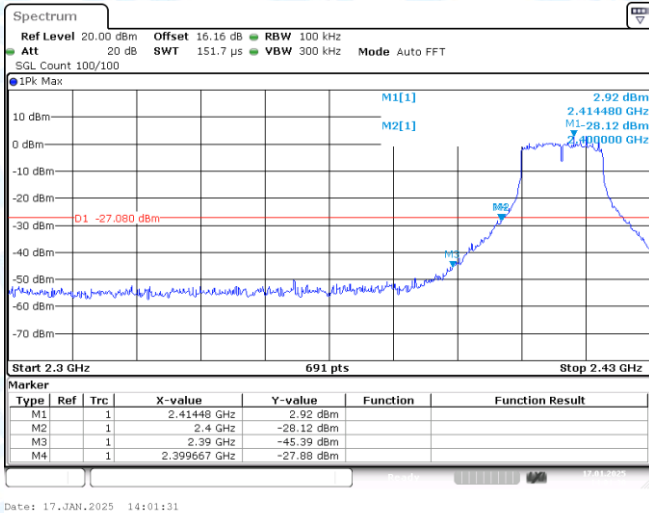


11G-Ant1-2412-PASS

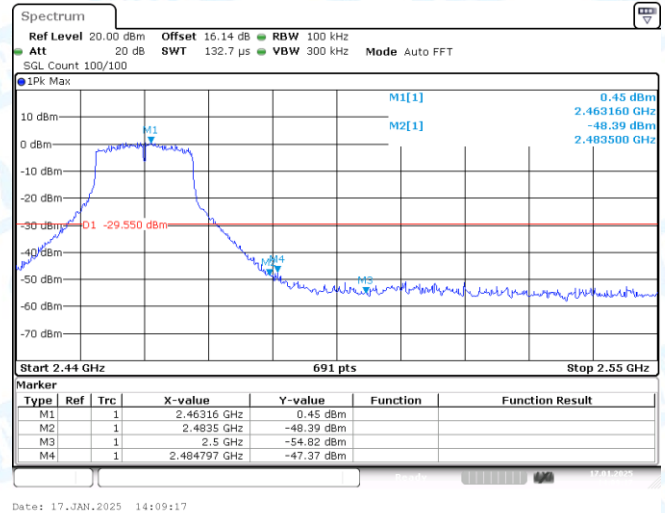


11G-Ant1-2462-PASS

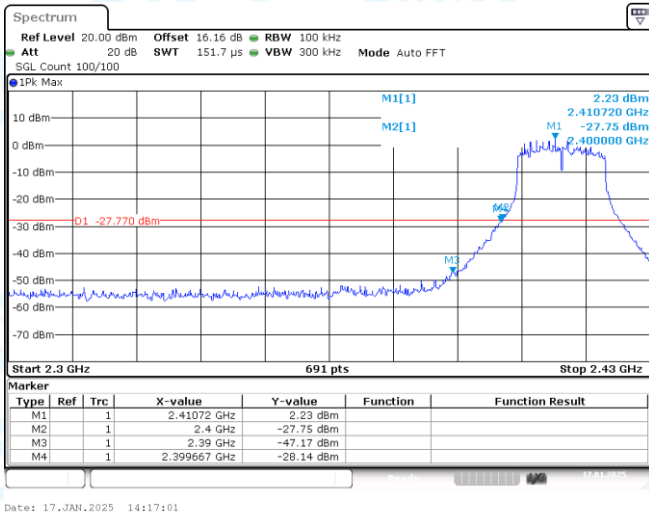


11N20SISO-Ant1-2412-PASS

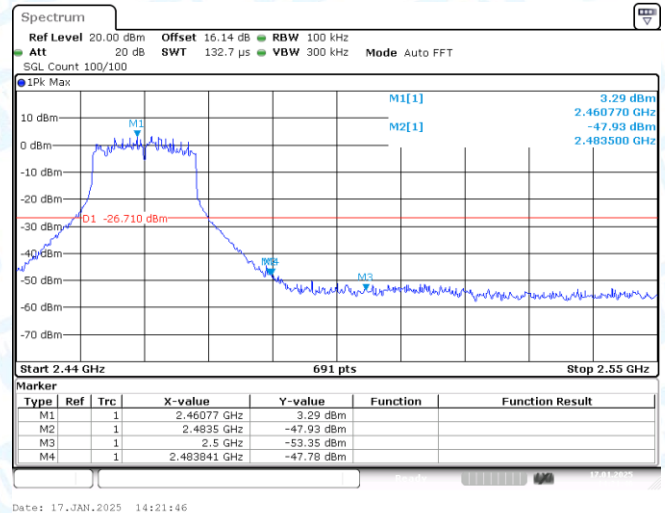

11N20SISO-Ant1-2462-PASS

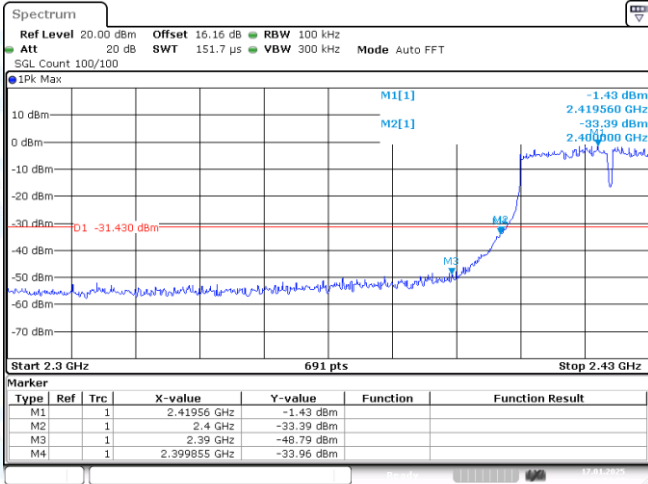


Date: 17.JAN.2025 14:24:35

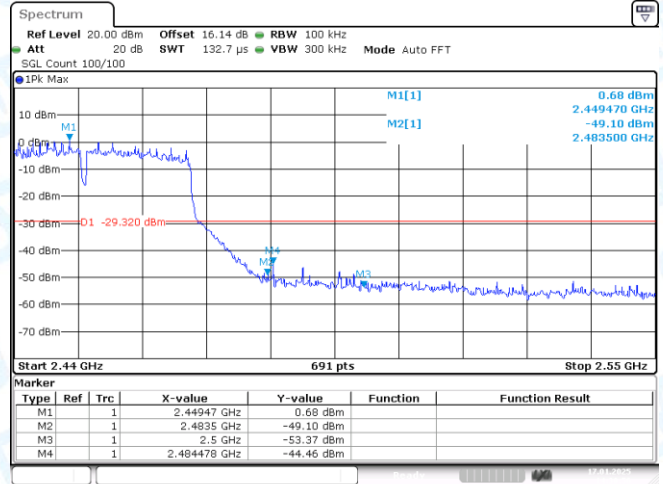


Date: 17.JAN.2025 14:30:56

11N40SISO-Ant1-2422-PASS

11N40SISO-Ant1-2452-PASS

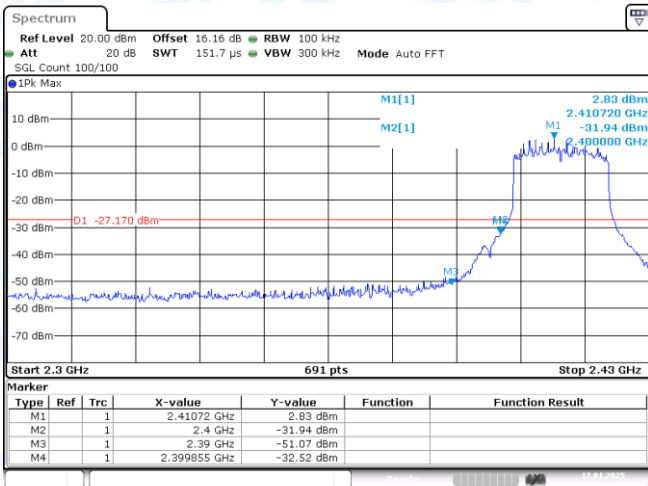


Date: 17.JAN.2025 14:49:40

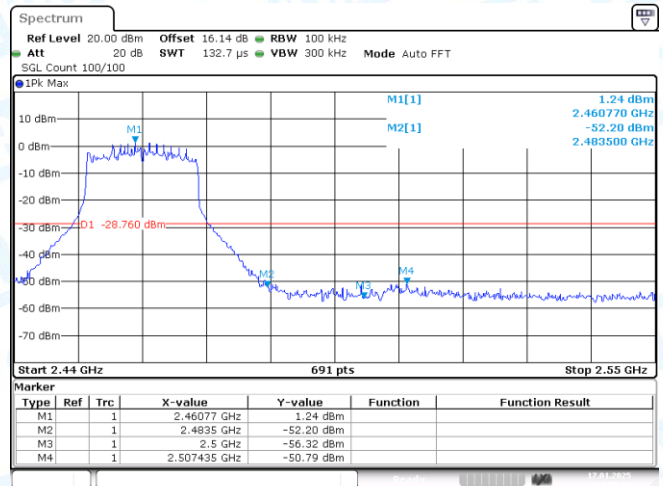


Date: 17.JAN.2025 14:55:52

11AX20SISO-Ant1-2412-PASS

11AX20SISO-Ant1-2462-PASS

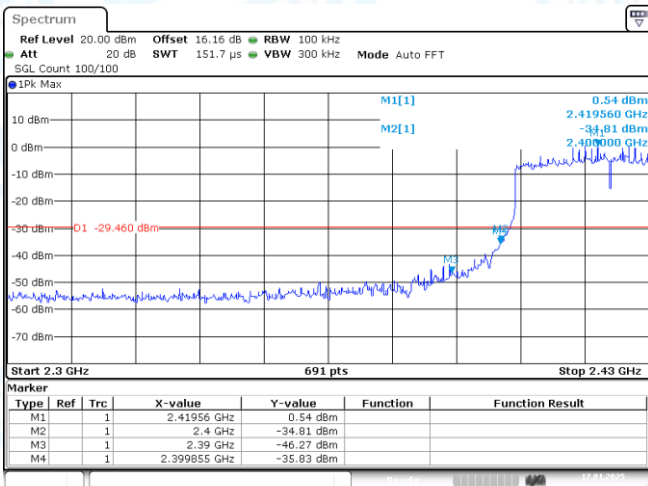

Date: 17.JAN.2025 14:58:21

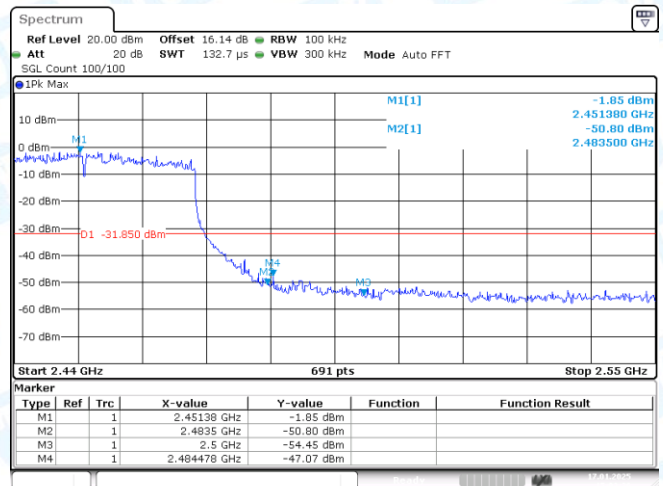

Date: 17.JAN.2025 15:03:36

11AX40SISO-Ant1-2422-PASS

11AX40SISO-Ant1-2452-PASS


## 6: Conducted Spurious Emission

### 6.1 Test Result


| TestMode   | Ant. | Frequency [MHz] | FreqRange [Mhz] | RefLevel [dBm] | Result [dBm] | Limit [dBm] | Verdict |
|------------|------|-----------------|-----------------|----------------|--------------|-------------|---------|
| 11B        | Ant1 | 2412            | 0~Reference     | 6.27           | 6.27         | ---         | PASS    |
| 11B        | Ant1 | 2412            | 30~1000         | 6.27           | -50.7        | ≤-23.73     | PASS    |
| 11B        | Ant1 | 2412            | 1000~26500      | 6.27           | -34.84       | ≤-23.73     | PASS    |
| 11B        | Ant1 | 2437            | 0~Reference     | 4.18           | 4.18         | ---         | PASS    |
| 11B        | Ant1 | 2437            | 30~1000         | 4.18           | -49.99       | ≤-25.82     | PASS    |
| 11B        | Ant1 | 2437            | 1000~26500      | 4.18           | -35.35       | ≤-25.82     | PASS    |
| 11B        | Ant1 | 2462            | 0~Reference     | 5.15           | 5.15         | ---         | PASS    |
| 11B        | Ant1 | 2462            | 30~1000         | 5.15           | -50.44       | ≤-24.85     | PASS    |
| 11B        | Ant1 | 2462            | 1000~26500      | 5.15           | -34.01       | ≤-24.85     | PASS    |
| 11G        | Ant1 | 2412            | 0~Reference     | -0.13          | -0.13        | ---         | PASS    |
| 11G        | Ant1 | 2412            | 30~1000         | -0.13          | -51.72       | ≤-30.13     | PASS    |
| 11G        | Ant1 | 2412            | 1000~26500      | -0.13          | -44.18       | ≤-30.13     | PASS    |
| 11G        | Ant1 | 2437            | 0~Reference     | 0.88           | 0.88         | ---         | PASS    |
| 11G        | Ant1 | 2437            | 30~1000         | 0.88           | -50.43       | ≤-29.12     | PASS    |
| 11G        | Ant1 | 2437            | 1000~26500      | 0.88           | -41.96       | ≤-29.12     | PASS    |
| 11G        | Ant1 | 2462            | 0~Reference     | -0.39          | -0.39        | ---         | PASS    |
| 11G        | Ant1 | 2462            | 30~1000         | -0.39          | -50.57       | ≤-30.39     | PASS    |
| 11G        | Ant1 | 2462            | 1000~26500      | -0.39          | -41.03       | ≤-30.39     | PASS    |
| 11N20SISO  | Ant1 | 2412            | 0~Reference     | -0.53          | -0.53        | ---         | PASS    |
| 11N20SISO  | Ant1 | 2412            | 30~1000         | -0.53          | -50.74       | ≤-30.53     | PASS    |
| 11N20SISO  | Ant1 | 2412            | 1000~26500      | -0.53          | -44.96       | ≤-30.53     | PASS    |
| 11N20SISO  | Ant1 | 2437            | 0~Reference     | 1.52           | 1.52         | ---         | PASS    |
| 11N20SISO  | Ant1 | 2437            | 30~1000         | 1.52           | -50.45       | ≤-28.48     | PASS    |
| 11N20SISO  | Ant1 | 2437            | 1000~26500      | 1.52           | -42.6        | ≤-28.48     | PASS    |
| 11N20SISO  | Ant1 | 2462            | 0~Reference     | 0.62           | 0.62         | ---         | PASS    |
| 11N20SISO  | Ant1 | 2462            | 30~1000         | 0.62           | -50.85       | ≤-29.38     | PASS    |
| 11N20SISO  | Ant1 | 2462            | 1000~26500      | 0.62           | -41.84       | ≤-29.38     | PASS    |
| 11N40SISO  | Ant1 | 2422            | 0~Reference     | -2.85          | -2.85        | ---         | PASS    |
| 11N40SISO  | Ant1 | 2422            | 30~1000         | -2.85          | -50.4        | ≤-32.85     | PASS    |
| 11N40SISO  | Ant1 | 2422            | 1000~26500      | -2.85          | -44.8        | ≤-32.85     | PASS    |
| 11N40SISO  | Ant1 | 2437            | 0~Reference     | -1.50          | -1.50        | ---         | PASS    |
| 11N40SISO  | Ant1 | 2437            | 30~1000         | -1.50          | -51.55       | ≤-31.5      | PASS    |
| 11N40SISO  | Ant1 | 2437            | 1000~26500      | -1.50          | -44.62       | ≤-31.5      | PASS    |
| 11N40SISO  | Ant1 | 2452            | 0~Reference     | -2.38          | -2.38        | ---         | PASS    |
| 11N40SISO  | Ant1 | 2452            | 30~1000         | -2.38          | -48.79       | ≤-32.38     | PASS    |
| 11N40SISO  | Ant1 | 2452            | 1000~26500      | -2.38          | -44.07       | ≤-32.38     | PASS    |
| 11AX20SISO | Ant1 | 2412            | 0~Reference     | 0.33           | 0.33         | ---         | PASS    |
| 11AX20SISO | Ant1 | 2412            | 30~1000         | 0.33           | -51.3        | ≤-29.67     | PASS    |
| 11AX20SISO | Ant1 | 2412            | 1000~26500      | 0.33           | -44.77       | ≤-29.67     | PASS    |
| 11AX20SISO | Ant1 | 2437            | 0~Reference     | -0.81          | -0.81        | ---         | PASS    |

|            |      |      |             |       |        |         |      |
|------------|------|------|-------------|-------|--------|---------|------|
| 11AX20SISO | Ant1 | 2437 | 30~1000     | -0.81 | -50.62 | ≤-30.81 | PASS |
| 11AX20SISO | Ant1 | 2437 | 1000~26500  | -0.81 | -39.24 | ≤-30.81 | PASS |
| 11AX20SISO | Ant1 | 2462 | 0~Reference | -2.53 | -2.53  | ---     | PASS |
| 11AX20SISO | Ant1 | 2462 | 30~1000     | -2.53 | -50.58 | ≤-32.53 | PASS |
| 11AX20SISO | Ant1 | 2462 | 1000~26500  | -2.53 | -45.2  | ≤-32.53 | PASS |
| 11AX40SISO | Ant1 | 2422 | 0~Reference | -4.15 | -4.15  | ---     | PASS |
| 11AX40SISO | Ant1 | 2422 | 30~1000     | -4.15 | -51.23 | ≤-34.15 | PASS |
| 11AX40SISO | Ant1 | 2422 | 1000~26500  | -4.15 | -45.12 | ≤-34.15 | PASS |
| 11AX40SISO | Ant1 | 2437 | 0~Reference | -2.24 | -2.24  | ---     | PASS |
| 11AX40SISO | Ant1 | 2437 | 30~1000     | -2.24 | -50.32 | ≤-32.24 | PASS |
| 11AX40SISO | Ant1 | 2437 | 1000~26500  | -2.24 | -43.69 | ≤-32.24 | PASS |
| 11AX40SISO | Ant1 | 2452 | 0~Reference | -2.85 | -2.85  | ---     | PASS |
| 11AX40SISO | Ant1 | 2452 | 30~1000     | -2.85 | -51.28 | ≤-32.85 | PASS |
| 11AX40SISO | Ant1 | 2452 | 1000~26500  | -2.85 | -44.33 | ≤-32.85 | PASS |


## 6.2 Test Graphs

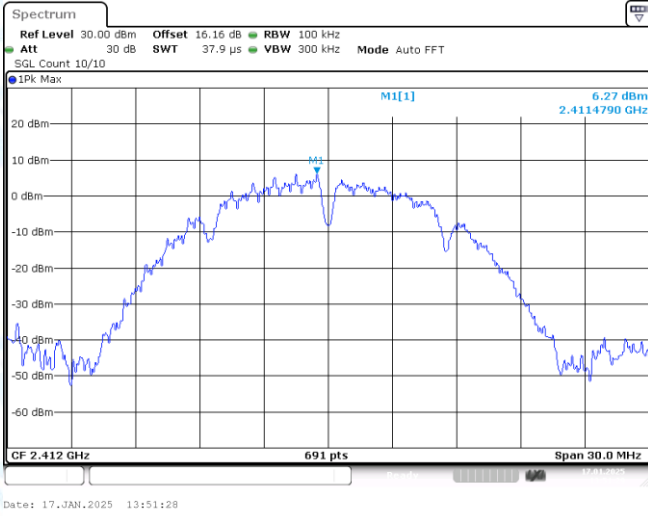


11B-Ant1-2412-0~Reference-PASS

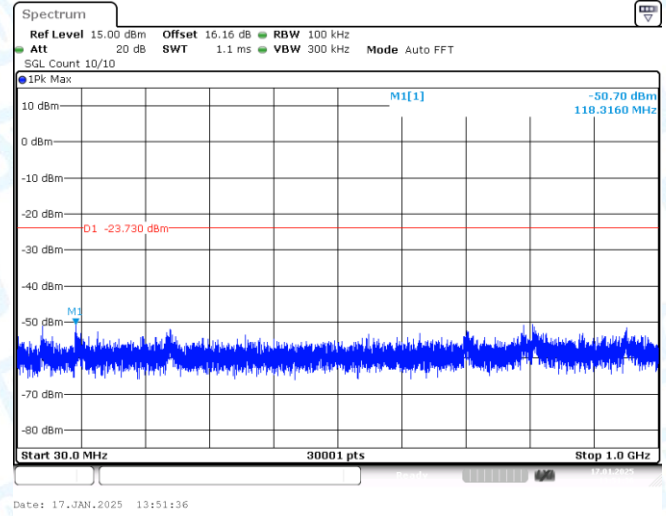


11B-Ant1-2412-30~1000-PASS

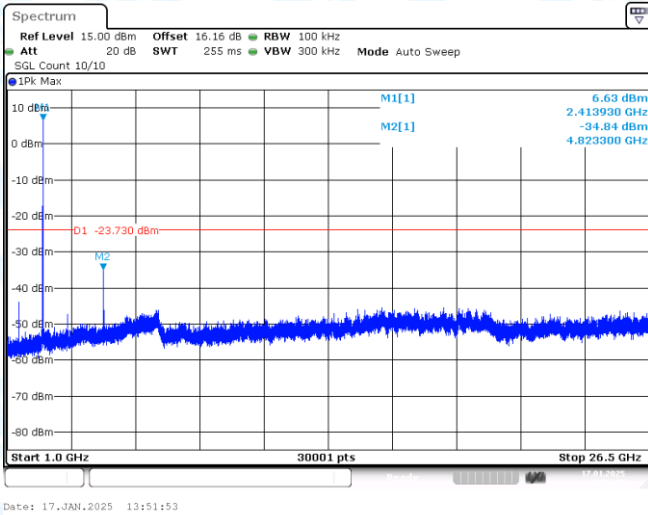


11B-Ant1-2412-1000~26500-PASS

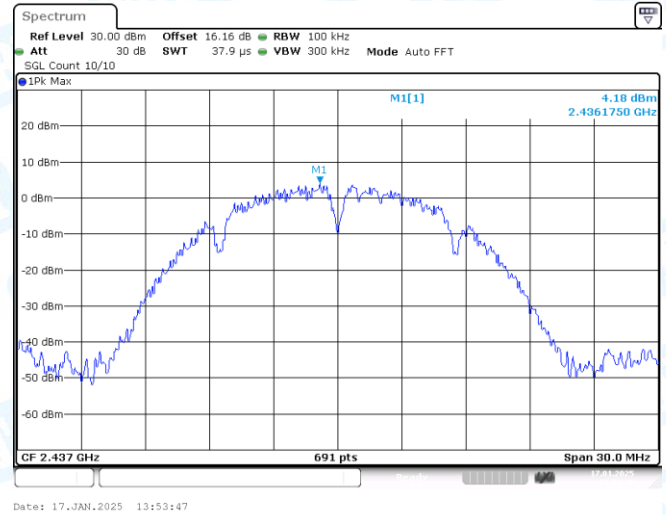



11B-Ant1-2437-0~Reference-PASS

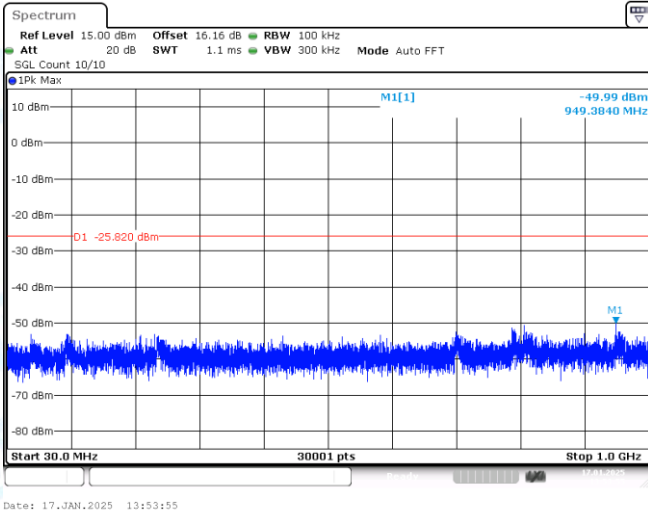

11B-Ant1-2437-30~1000-PASS


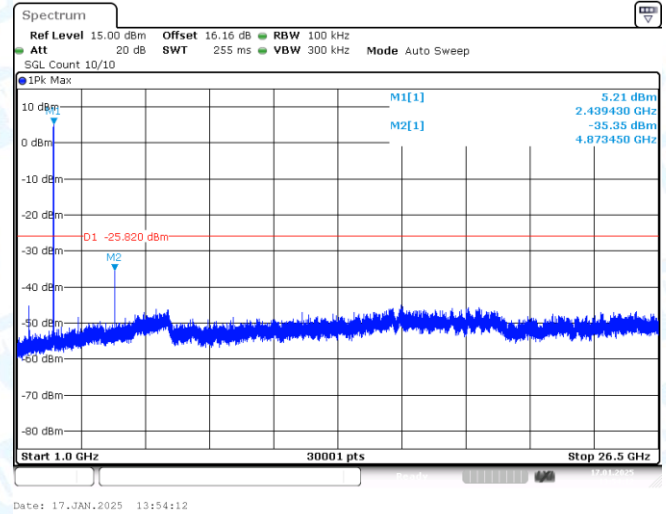


11B-Ant1-2437-1000~26500-PASS

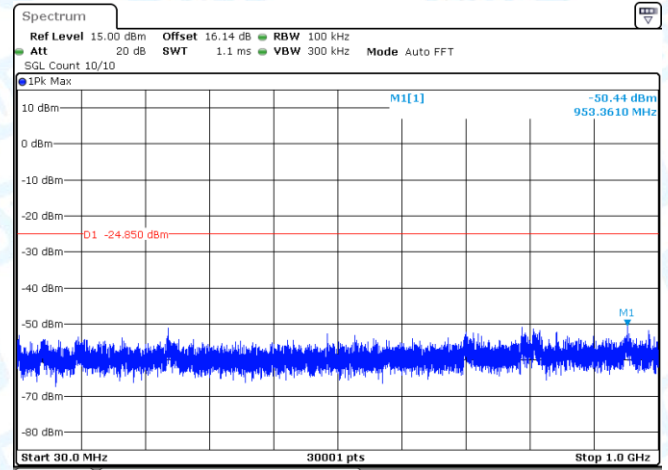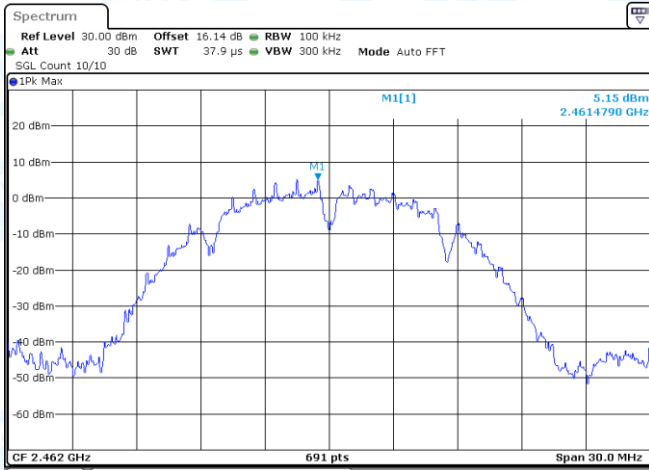



11B-Ant1-2462-0~Reference-PASS

11B-Ant1-2462-30~1000-PASS

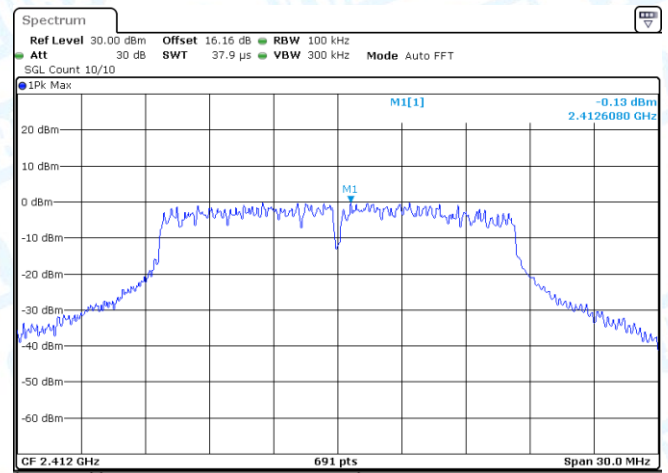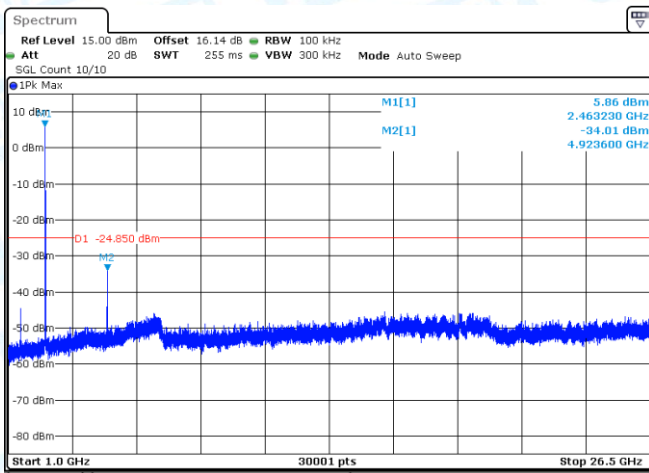



11B-Ant1-2462-1000~26500-PASS

11G-Ant1-2412-0~Reference-PASS

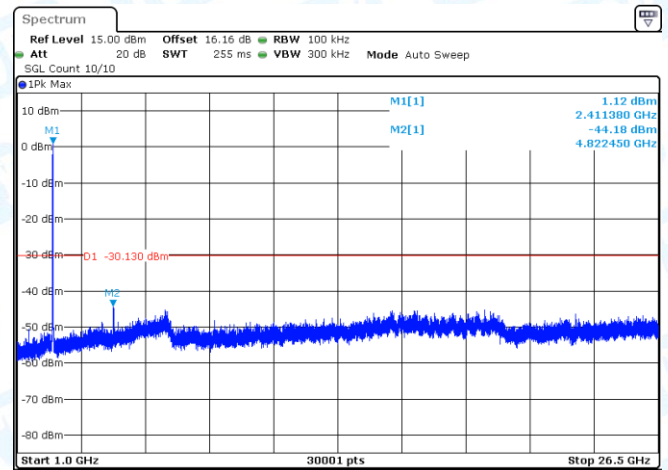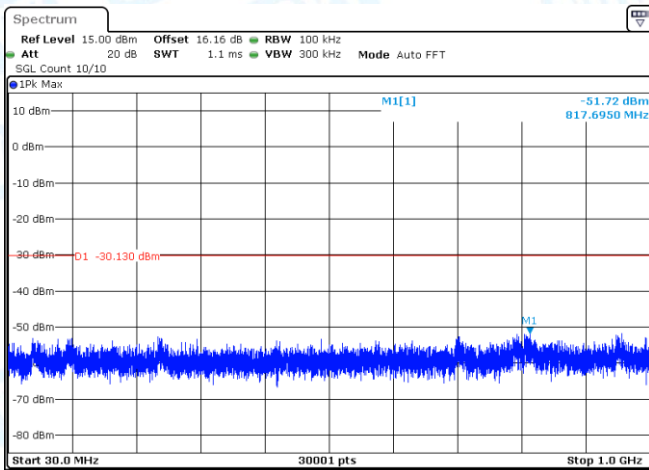



11G-Ant1-2412-30~1000-PASS

11G-Ant1-2412-1000~26500-PASS

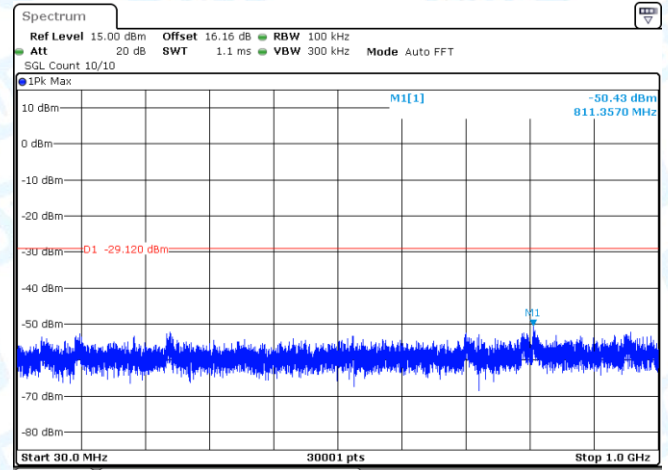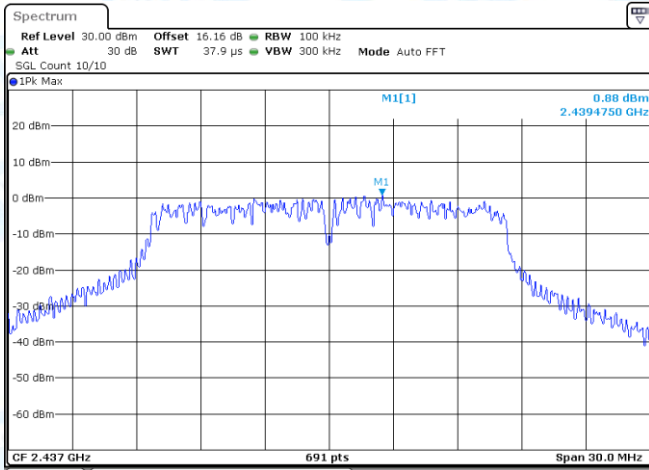



11G-Ant1-2437-0~Reference-PASS

11G-Ant1-2437-30~1000-PASS

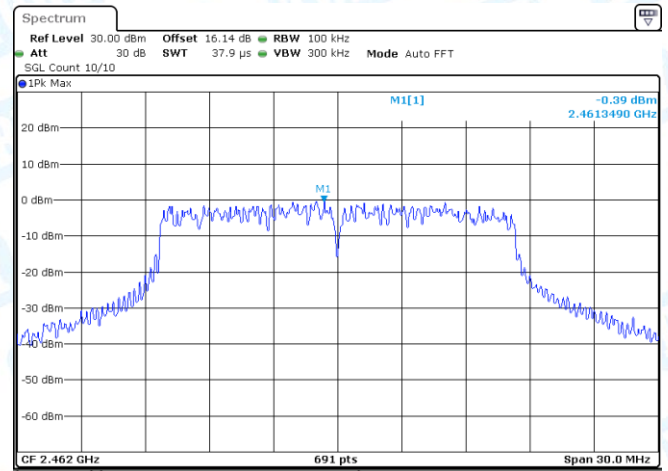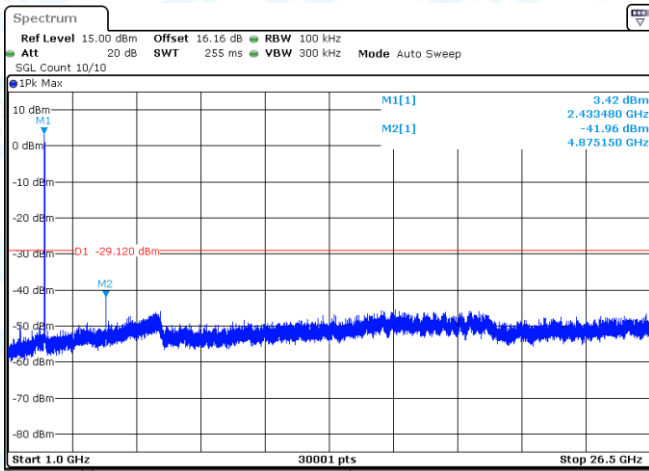



11G-Ant1-2437-1000~26500-PASS

11G-Ant1-2462-0~Reference-PASS

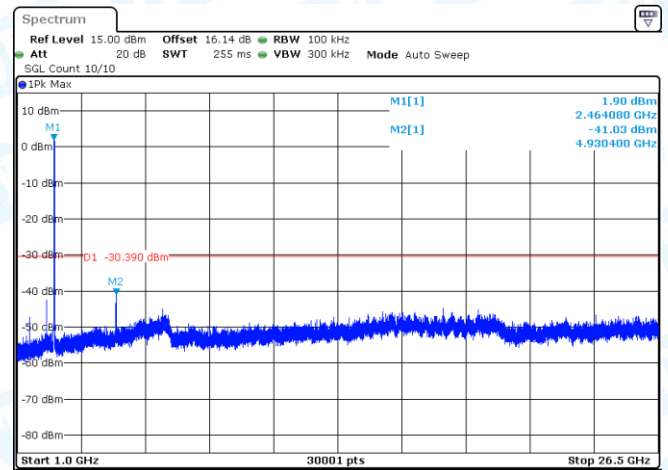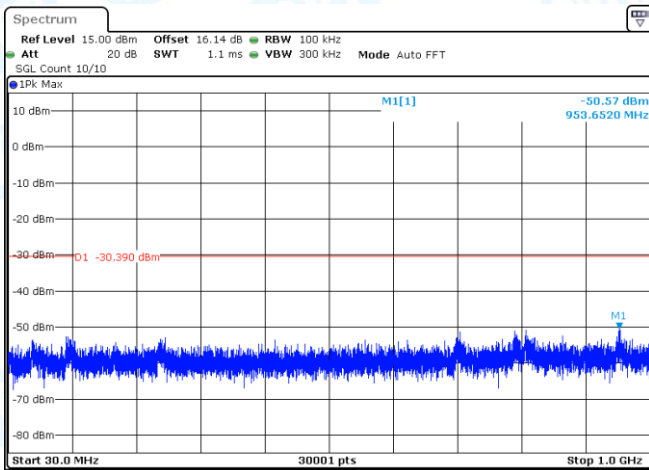



11G-Ant1-2462-30~1000-PASS

11G-Ant1-2462-1000~26500-PASS

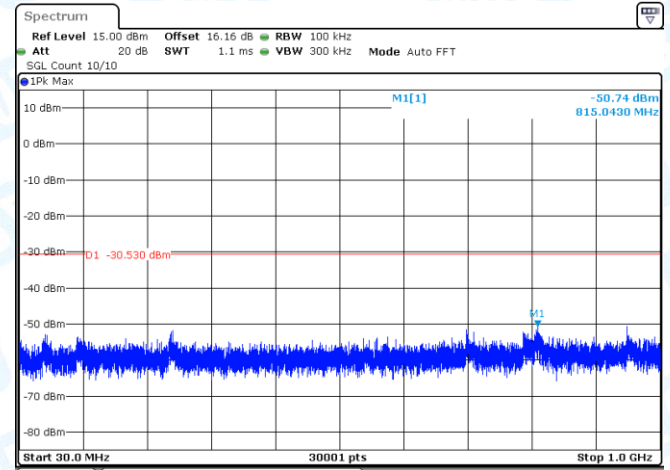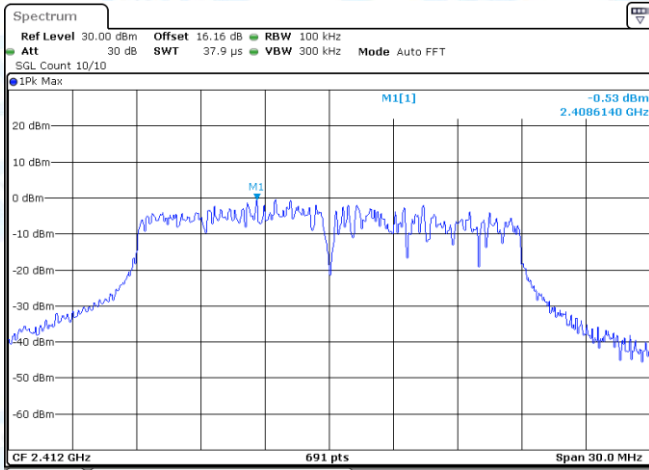



11N20SISO-Ant1-2412-0~Reference-PASS

11N20SISO-Ant1-2412-30~1000-PASS

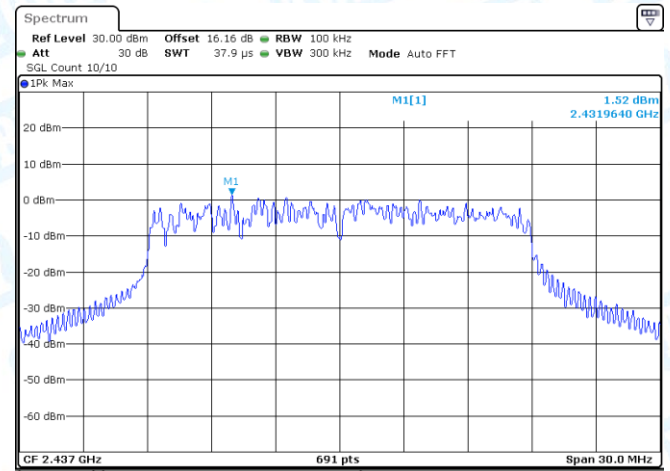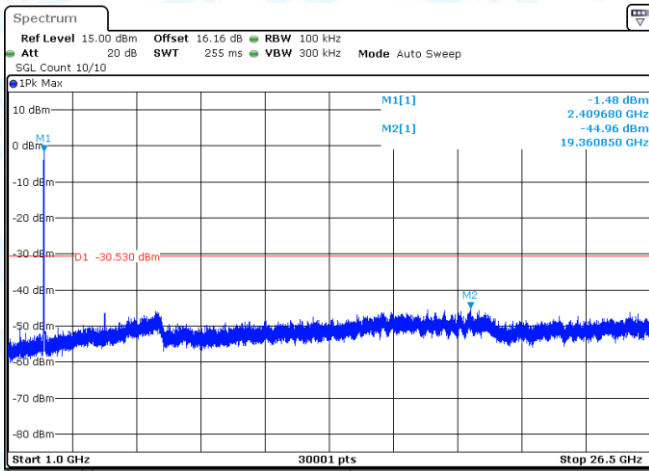

11N20SISO-Ant1-2412-1000~26500-PASS

11N20SISO-Ant1-2437-0~Reference-PASS

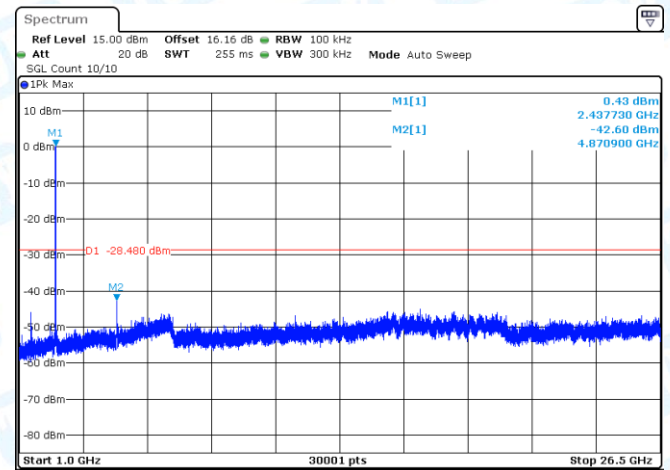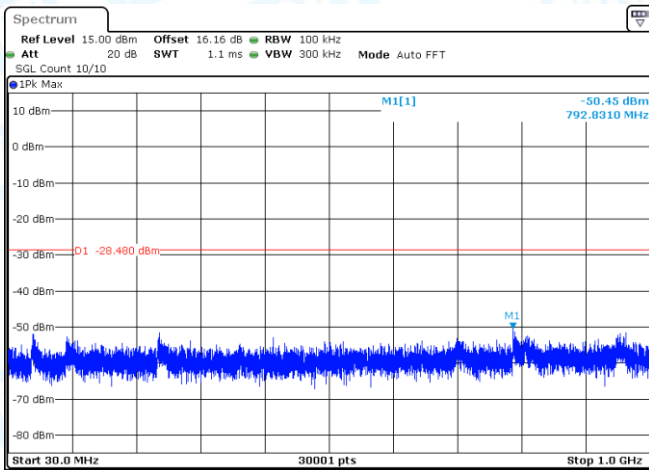

11N20SISO-Ant1-2437-30~1000-PASS

11N20SISO-Ant1-2437-1000~26500-PASS