

**FCC Test Report****Report Reference No.** : HK2502110488-10E**FCC ID** : 2BNQ8-K8ACTIVE

Compiled by

( position+printedname+signature).. : Testing Engineer Len Liao

Supervised by

(position+printedname+signature)... : Technical Manager Sliver Wan

Approved by

(position+printedname+signature)... : Authorized Signatory Jason Zhou

Date of issue : Mar. 25, 2025

**Testing Laboratory Name** : Shenzhen HUAKE Testing Technology Co., Ltd.Address : 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,  
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong,  
China**Applicant's name** : AOZORA WIRELESS INC.Address : 8605 Santa Monica Blvd 30327, West Hollywood California 90069  
United States**Test specification** :

Standard : FCC CFR Title 47 Part 2, Part 22H

TRF Originator : Shenzhen HUAKE Testing Technology Co., Ltd.

**Shenzhen HUAKE Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** : Rugged Tablet

Trade Mark : AOZORA

**Manufacturer** : AOZORA WIRELESS INC.

Model/Type reference : K8 Active

Series Models : K8

Modulation Type : QPSK, 16QAM

Rating : DC 5V from Type-C or DC 3.86V from Battery

Hardware version : V2.0

Software version : V2.0

Result : **PASS**

**TEST REPORT**

|                          |                         |               |
|--------------------------|-------------------------|---------------|
| <b>Test Report No. :</b> | <b>HK2502110488-10E</b> | Mar. 25, 2025 |
|                          |                         | Date of issue |

Equipment under Test : Rugged Tablet

Model /Type : K8 Active

Series Models : K8

**Applicant** : **AOZORA WIRELESS INC.**

Address : 8605 Santa Monica Blvd 30327, West Hollywood  
California 90069 United States

**Manufacturer** : **AOZORA WIRELESS INC.**

Address : 8605 Santa Monica Blvd 30327, West Hollywood  
California 90069 United States

|                     |             |
|---------------------|-------------|
| <b>Test Result:</b> | <b>PASS</b> |
|---------------------|-------------|

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



## Contents

|          |                                                      |           |
|----------|------------------------------------------------------|-----------|
| <b>1</b> | <b>Test Standards .....</b>                          | <b>5</b>  |
| <b>2</b> | <b>Summary .....</b>                                 | <b>6</b>  |
| 2.1      | General Remarks                                      | 6         |
| 2.2      | Product Description                                  | 6         |
| 2.3      | Equipment under Test                                 | 6         |
| 2.4      | Normal Accessory Setting                             | 7         |
| 2.5      | EUT Configuration                                    | 7         |
| 2.6      | Related Submittal(s) / Grant (s)                     | 7         |
| 2.7      | Modifications                                        | 7         |
| 2.8      | General Test Conditions/Configurations               | 7         |
| <b>3</b> | <b>Test Environment .....</b>                        | <b>8</b>  |
| 3.1      | Information of the Test Laboratory                   | 8         |
| 3.2      | Environmental Conditions                             | 8         |
| 3.3      | Test Description                                     | 8         |
| 3.4      | Equipments Used During The Test                      | 9         |
| <b>4</b> | <b>Test Conditions and Results .....</b>             | <b>11</b> |
| 4.1      | Output Power                                         | 11        |
| 4.2      | Peak-to-Average Ratio (PAR)                          | 16        |
| 4.3      | Occupied Bandwidth and Emission Bandwidth            | 21        |
| 4.4      | Band Edge Compliance                                 | 26        |
| 4.5      | Spurious Emissions Antenna Port                      | 31        |
| 4.6      | Radiated Spurious Emission                           | 44        |
| 4.7      | Frequency Stability                                  | 50        |
| <b>5</b> | <b>Test Setup Photos of the EUT .....</b>            | <b>52</b> |
| <b>6</b> | <b>External and Internal photos of the EUT .....</b> | <b>53</b> |



**\*\* Modified History \*\***

| Revision     | Description                 | Issued Data   | Remark     |
|--------------|-----------------------------|---------------|------------|
| Revision 1.0 | Initial Test Report Release | Mar. 25, 2025 | Jason Zhou |
|              |                             |               |            |
|              |                             |               |            |



## **1 Test Standards**

The tests were performed according to following standards:

[FCC Part 2](#): Frequency Allocations And Radio Treaty Matters; General Rules And Regulations.

[FCC Part 22 Subpart H](#): Private Land Mobile Radio Services.

[ANSI/TIA-603-E-2016](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[ANSI C63.26-2015](#): IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services.

[KDB971168 D01:v03r01](#): Measurement Guidance For Certification Of Licensed Digital Transmitters.



## 2 Summary

### 2.1 General Remarks

|                                |   |               |
|--------------------------------|---|---------------|
| Date of receipt of test sample | : | Feb. 11, 2025 |
|                                |   |               |
| Testing commenced on           | : | Feb. 11, 2025 |
|                                |   |               |
| Testing concluded on           | : | Mar. 25, 2025 |

### 2.2 Product Description

|                           |                                                                                                                                     |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Name of EUT:              | Rugged Tablet                                                                                                                       |
| Model/Type reference:     | K8 Active                                                                                                                           |
| Series Models:            | K8                                                                                                                                  |
| Model Difference:         | All model's the function, software and electric circuit are the same, only with model named different. Test sample mode: K8 Active. |
| Power supply:             | DC 5V from Type-C or DC 3.86V from Battery                                                                                          |
| Modulation Type:          | QPSK, 16QAM                                                                                                                         |
| Antenna type:             | FPC Antenna                                                                                                                         |
| Antenna gain:             | 0.81dBi                                                                                                                             |
| Operation Frequency Band: | LTE BAND 5                                                                                                                          |
| Operation frequency:      | LTE BAND 5:824~849 MHz                                                                                                              |
| LTE Release:              | R8                                                                                                                                  |
| Extreme temp. Tolerance:  | -30°C to +50°C                                                                                                                      |
| Extreme vol. Limits:      | 4.25VDC to 5.75VDC (nominal: 5.0VDC)                                                                                                |

### 2.3 Equipment under Test

#### Power supply system utilised

|                      |   |                                                                   |                                 |
|----------------------|---|-------------------------------------------------------------------|---------------------------------|
| Power supply voltage | : | <input type="radio"/> 120V/ 60 Hz                                 | <input type="radio"/> 115V/60Hz |
|                      |   | <input type="radio"/> 12 V DC                                     | <input type="radio"/> 24 V DC   |
|                      |   | <input checked="" type="radio"/> Other (specified in blank below) |                                 |

DC 5V from Type-C or DC 3.86V from Battery



## 2.4 Normal Accessory Setting

Fully charged battery was used during the test.

## 2.5 EUT Configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

|               |                |   |
|---------------|----------------|---|
| ○ Power Cable | Length (m) :   | / |
|               | Shield :       | / |
|               | Detachable :   | / |
| ○ Multimeter  | Manufacturer : | / |
|               | Model No. :    | / |

## 2.6 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended filing to comply with FCC Part 22H, Rules.

## 2.7 Modifications

No modifications were implemented to meet testing criteria.

## 2.8 General Test Conditions/Configurations

### 2.8.1 Test Environment

| Environment Parameter | Selected Values During Tests |         |
|-----------------------|------------------------------|---------|
| Relative Humidity     | Ambient                      |         |
| Temperature           | TN                           | Ambient |
| Voltage               | VL                           | 4.25V   |
|                       | VN                           | 5.0V    |
|                       | VH                           | 5.75V   |

NOTE: VL=lower extreme test voltage VN=nominal voltage  
VH=upper extreme test voltage TN=normal temperature



### 3 Test Environment

#### 3.1 Information of the Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.  
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,  
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.  
FCC Designation Number is CN1229.  
Canada IC CAB identifier is CN0045.  
CNAS Registration Number is L9589.

#### 3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 15-35 ° C    |
|                       |              |
| Humidity:             | 30-60 %      |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

#### 3.3 Test Description

##### Band 5 (824~849MHz)

| Test Item                                     | FCC Rule No.                           | Requirements                                                                                        | Verdict |
|-----------------------------------------------|----------------------------------------|-----------------------------------------------------------------------------------------------------|---------|
| Effective(Isotropic)<br>Radiated Output Power | §2.1046,<br>§22.913(a)(2)              | EIRP ≤ 2W                                                                                           | Pass    |
| Peak-Average Ratio                            | §24.232(d)                             | FCC: Limit ≤ 13dB                                                                                   | Pass    |
| Modulation<br>Characteristics                 | §2.1047                                | Digital modulation                                                                                  | Pass    |
| Bandwidth                                     | §2.1049                                | OBW: No limit.<br>EBW: No limit.                                                                    | Pass    |
| Band Edges<br>Compliance                      | §2.1051,<br>§24.238                    | ≤ -13dBm/1%*EBW,<br>In 1MHz bands immediately outside and adjacent to<br>The frequency block.       | Pass    |
| Spurious Emission at<br>Antenna Terminals     | §2.1051,<br>§24.238                    | ≤ -13dBm/1MHz,<br>from 9kHz to 10th harmonics but outside authorized<br>Operating frequency ranges. | Pass    |
| Field Strength of<br>Spurious Radiation       | Clause 7 of<br>KDB971168<br>D01 v02r02 | ≤ -13dBm/1MHz.                                                                                      | Pass    |
| Frequency Stability                           | §2.1055,<br>§22.355,<br>§24.235        | FCC: within authorized frequency<br>block.                                                          | Pass    |

NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".

Remark:

1. The measurement uncertainty is not included in the test result.



### 3.4 Equipments Used During The Test

| Item | Test Equipment                  | Manufacturer    | Model No.             | Serial No. | Calibration Date | Calibration Due Date |
|------|---------------------------------|-----------------|-----------------------|------------|------------------|----------------------|
| 1    | L.I.S.N.                        | R&S             | ENV216                | HKE-002    | 2024/02/20       | 2025/02/19           |
| 2    | L.I.S.N.                        | R&S             | ENV216                | HKE-059    | 2024/02/20       | 2025/02/19           |
| 3    | EMI Test Receiver               | R&S             | ESR                   | HKE-005    | 2024/02/20       | 2025/02/19           |
| 4    | Spectrum analyzer               | Agilent         | N9020A                | HKE-117    | 2024/02/20       | 2025/02/19           |
| 5    | Spectrum analyzer               | R&S             | FSV3044               | HKE-126    | 2024/02/20       | 2025/02/19           |
| 6    | Preamplifier                    | EMCI            | EMC051845S            | HKE-006    | 2024/02/20       | 2025/02/19           |
| 7    | Preamplifier                    | Schwarzbeck     | BBV 9743              | HKE-016    | 2024/02/20       | 2025/02/19           |
| 8    | Preamplifier                    | A.H. Systems    | SAS-574               | HKE-182    | 2024/02/20       | 2025/02/19           |
| 9    | 6dB Attenuator                  | Pasternack      | 6db                   | HKE-184    | 2024/02/20       | 2025/02/19           |
| 10   | EMI Test Receiver               | Rohde & Schwarz | ESR-7                 | HKE-010    | 2024/02/20       | 2025/02/19           |
| 11   | Broadband Antenna               | Schwarzbeck     | VULB9168              | HKE-167    | 2024/02/21       | 2026/02/20           |
| 12   | Loop Antenna                    | COM-POWER       | AL-130R               | HKE-014    | 2024/02/21       | 2026/02/20           |
| 13   | Horn Antenna                    | Schwarzbeck     | 9120D                 | HKE-013    | 2024/02/21       | 2026/02/20           |
| 14   | EMI Test Software               | Tonscend        | JS32-CE 2.5.0.6       | HKE-081    | /                | /                    |
| 15   | EMI Test Software               | Tonscend        | JS32-RE 5.0.0         | HKE-082    | /                | /                    |
| 16   | RF Automatic control unit       | Tonscend        | JS0806-1              | HKE-096    | 2024/02/20       | 2025/02/19           |
| 17   | High pass filter unit           | Tonscend        | JS0806-F              | HKE-055    | 2024/02/20       | 2025/02/19           |
| 18   | Wireless Communication Test Set | R&S             | CMU200                | HKE-026    | 2024/02/20       | 2025/02/19           |
| 19   | Wireless Communication Test Set | R&S             | CMW500                | HKE-027    | 2024/02/20       | 2025/02/19           |
| 20   | High-low temperature chamber    | Guangke         | HT-80L                | HKE-118    | 2024/06/10       | 2025/06/09           |
| 21   | Temperature and humidity meter  | Boyang          | HTC-1                 | HKE-075    | 2024/06/10       | 2025/06/09           |
| 22   | RF Test Software                | Tonscend        | JS1120 Version 3.1.46 | HKE-183    | /                | /                    |
| 23   | RSE Test Software               | Tonscend        | JS36-RSE 5.0.0        | HKE-184    | /                | /                    |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



| Item | Test Equipment                  | Manufacturer    | Model No.             | Serial No. | Calibration Date | Calibration Due Date |
|------|---------------------------------|-----------------|-----------------------|------------|------------------|----------------------|
| 1    | L.I.S.N.                        | R&S             | ENV216                | HKE-002    | 2025/02/19       | 2026/02/18           |
| 2    | L.I.S.N.                        | R&S             | ENV216                | HKE-059    | 2025/02/19       | 2026/02/18           |
| 3    | EMI Test Receiver               | R&S             | ESR                   | HKE-005    | 2025/02/19       | 2026/02/18           |
| 4    | Spectrum analyzer               | Agilent         | N9020A                | HKE-117    | 2025/02/19       | 2026/02/18           |
| 5    | Spectrum analyzer               | R&S             | FSV3044               | HKE-126    | 2025/02/19       | 2026/02/18           |
| 6    | Preamplifier                    | EMCI            | EMC051845S            | HKE-006    | 2025/02/19       | 2026/02/18           |
| 7    | Preamplifier                    | Schwarzbeck     | BBV 9743              | HKE-016    | 2025/02/19       | 2026/02/18           |
| 8    | Preamplifier                    | A.H. Systems    | SAS-574               | HKE-182    | 2025/02/19       | 2026/02/18           |
| 9    | 6dB Attenuator                  | Pasternack      | 6db                   | HKE-184    | 2025/02/19       | 2026/02/18           |
| 10   | EMI Test Receiver               | Rohde & Schwarz | ESR-7                 | HKE-010    | 2024/02/20       | 2025/02/19           |
| 11   | Broadband Antenna               | Schwarzbeck     | VULB9168              | HKE-167    | 2024/02/21       | 2026/02/20           |
| 12   | Loop Antenna                    | COM-POWER       | AL-130R               | HKE-014    | 2024/02/21       | 2026/02/20           |
| 13   | Horn Antenna                    | Schwarzbeck     | 9120D                 | HKE-013    | 2024/02/21       | 2026/02/20           |
| 14   | EMI Test Software               | Tonscend        | JS32-CE 2.5.0.6       | HKE-081    | /                | /                    |
| 15   | EMI Test Software               | Tonscend        | JS32-RE 5.0.0         | HKE-082    | /                | /                    |
| 16   | RF Automatic control unit       | Tonscend        | JS0806-1              | HKE-096    | 2025/02/19       | 2026/02/18           |
| 17   | High pass filter unit           | Tonscend        | JS0806-F              | HKE-055    | 2025/02/19       | 2026/02/18           |
| 18   | Wireless Communication Test Set | R&S             | CMU200                | HKE-026    | 2025/02/19       | 2026/02/18           |
| 19   | Wireless Communication Test Set | R&S             | CMW500                | HKE-027    | 2025/02/19       | 2026/02/18           |
| 20   | High-low temperature chamber    | Guangke         | HT-80L                | HKE-118    | 2024/06/10       | 2025/06/09           |
| 21   | Temperature and humidity meter  | Boyang          | HTC-1                 | HKE-075    | 2024/06/10       | 2025/06/09           |
| 22   | RF Test Software                | Tonscend        | JS1120 Version 3.1.46 | HKE-183    | /                | /                    |
| 23   | RSE Test Software               | Tonscend        | JS36-RSE 5.0.0        | HKE-184    | /                | /                    |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 4 Test Conditions and Results


### 4.1 Output Power

#### 4.1.1 Conducted Output Power

##### TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

##### TEST CONFIGURATION

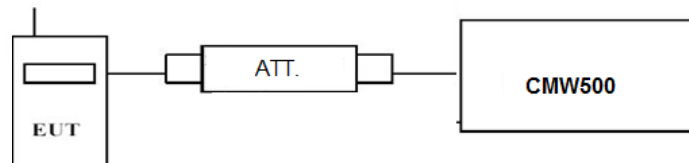

##### TEST PROCEDURE

###### Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display CMW500, and then test.

##### TEST RESULTS

###### compliance \*

Remark:

- We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5;

| LTE FDD Band 5       |                 |                |                           |       |
|----------------------|-----------------|----------------|---------------------------|-------|
| TX Channel Bandwidth | Frequency (MHz) | RB Size/Offset | Burst Average Power [dBm] |       |
|                      |                 |                | QPSK                      | 16QAM |
| 1.4 MHz              | 824.7           | 1 RB low       | 23.83                     | 22.88 |
|                      |                 | 1 RB high      | 23.95                     | 22.79 |
|                      |                 | 50% RB mid     | 23.84                     | 22.74 |
|                      |                 | 100% RB        | 23.96                     | 22.74 |
|                      | 836.5           | 1 RB low       | 24.05                     | 22.80 |
|                      |                 | 1 RB high      | 24.03                     | 22.96 |
|                      |                 | 50% RB mid     | 23.96                     | 22.72 |
|                      |                 | 100% RB        | 24.05                     | 22.85 |
|                      | 848.3           | 1 RB low       | 24.12                     | 23.04 |
|                      |                 | 1 RB high      | 24.24                     | 23.03 |
|                      |                 | 50% RB mid     | 24.09                     | 22.87 |
|                      |                 | 100% RB        | 24.21                     | 22.94 |
| 3 MHz                | 825.5           | 1 RB low       | 23.92                     | 22.76 |
|                      |                 | 1 RB high      | 23.90                     | 22.80 |
|                      |                 | 50% RB mid     | 23.88                     | 22.80 |
|                      |                 | 100% RB        | 22.82                     | 21.79 |
|                      | 836.5           | 1 RB low       | 24.04                     | 22.78 |
|                      |                 | 1 RB high      | 24.07                     | 22.78 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



|        |       |            |       |       |
|--------|-------|------------|-------|-------|
|        | 847.5 | 50% RB mid | 24.01 | 22.77 |
|        |       | 100% RB    | 23.98 | 21.90 |
|        |       | 1 RB low   | 24.35 | 23.01 |
|        |       | 1 RB high  | 24.20 | 23.00 |
|        |       | 50% RB mid | 24.21 | 22.95 |
|        |       | 100% RB    | 23.21 | 22.19 |
| 5 MHz  | 826.5 | 1 RB low   | 24.00 | 22.86 |
|        |       | 1 RB high  | 23.99 | 22.91 |
|        |       | 50% RB mid | 24.08 | 22.95 |
|        |       | 100% RB    | 23.89 | 21.85 |
|        | 836.5 | 1 RB low   | 24.11 | 23.20 |
|        |       | 1 RB high  | 24.08 | 23.15 |
|        |       | 50% RB mid | 23.97 | 23.03 |
|        |       | 100% RB    | 23.00 | 22.01 |
|        | 846.5 | 1 RB low   | 24.34 | 23.23 |
|        |       | 1 RB high  | 24.38 | 23.20 |
|        |       | 50% RB mid | 24.26 | 23.26 |
|        |       | 100% RB    | 23.20 | 22.22 |
| 10 MHz | 829.0 | 1 RB low   | 24.07 | 23.12 |
|        |       | 1 RB high  | 24.04 | 23.02 |
|        |       | 50% RB mid | 24.33 | 23.34 |
|        |       | 100% RB    | 23.92 | 22.88 |
|        | 836.5 | 1 RB low   | 24.13 | 22.95 |
|        |       | 1 RB high  | 24.08 | 22.93 |
|        |       | 50% RB mid | 24.44 | 23.43 |
|        |       | 100% RB    | 23.00 | 22.99 |
|        | 844.0 | 1 RB low   | 24.36 | 23.11 |
|        |       | 1 RB high  | 24.12 | 22.89 |
|        |       | 50% RB mid | 24.61 | 23.25 |
|        |       | 100% RB    | 23.18 | 22.17 |


## 4.1.2. Radiated Output Power

### LIMIT

This is the test for the maximum radiated power from the EUT.

Rule Part 22H.232(b) specifies, "Mobile/portable stations are limited to 7 watts e.i.r.p.

### TEST CONFIGURATION

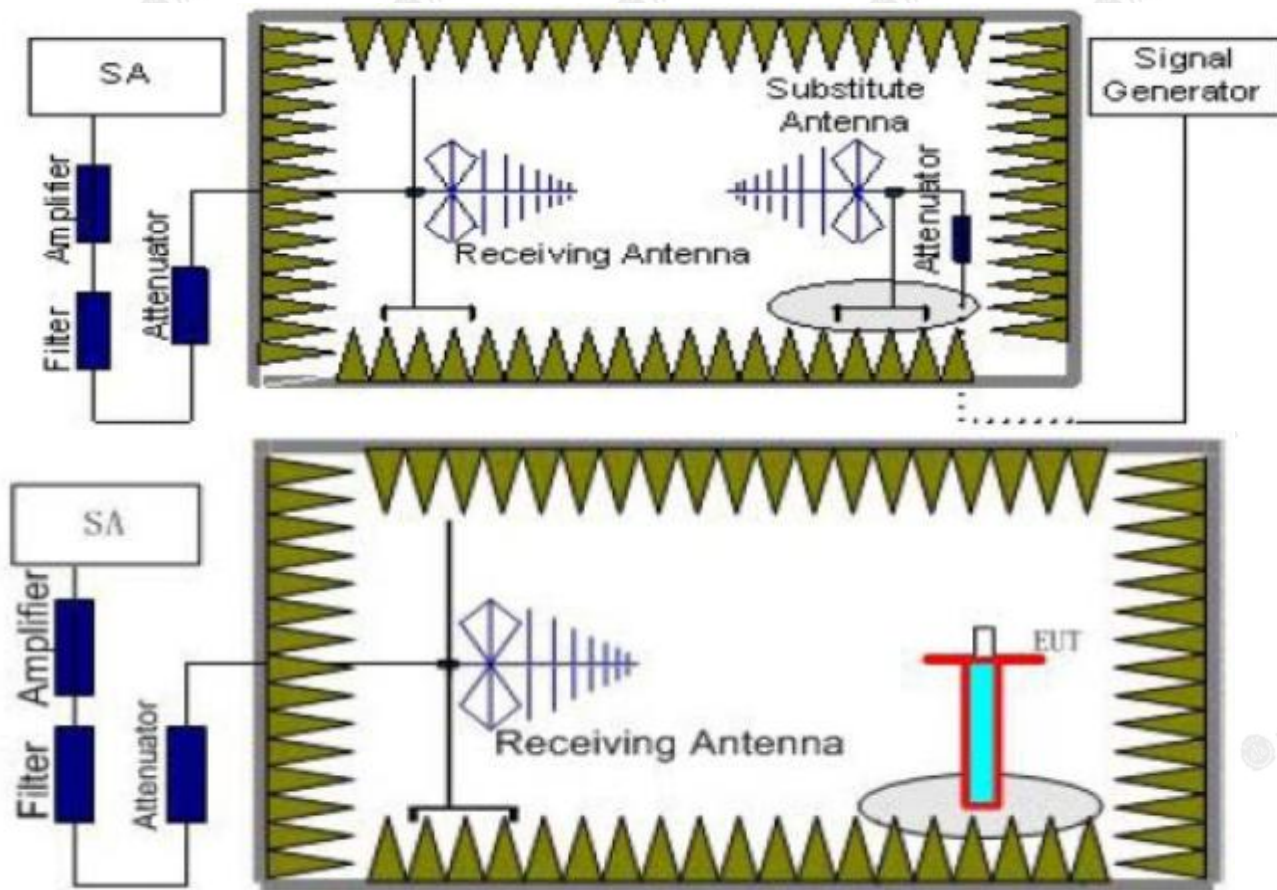

### TEST PROCEDURE

1. EUT was placed on a 0.1 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.1m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as ( $P_r$ ).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is disconnected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver.



- reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:  $\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$

We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:

$\text{Power(EIRP)} = P_{Mea} - P_{cl} + G_a$

- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$ .

## TEST RESULTS

### Radiated Measurement:

Remark:

- We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.
- $\text{EIRP} = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + P_{Ag}(\text{dB}) + G_a(\text{dBi})$
- We measured both Horizontal and Vertical direction, recorded worst case direction.

#### LTE FDD Band 5\_Channel Bandwidth 1.4MHz\_QPSK

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | $P_{Aq}$ (dB) | EIRP (dBm) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|---------------|------------|-----------|-------------|-------------|--------------|
| 824.7           | -17.98          | 2.42          | 8.45                   | 36.82         | 24.87      | 22.72     | 38.45       | 15.73       | V            |
| 836.5           | -17.12          | 3.46          | 8.45                   | 36.82         | 24.69      | 22.54     | 38.45       | 15.91       | V            |
| 848.3           | -18.3           | 2.53          | 8.36                   | 36.82         | 24.35      | 22.2      | 38.45       | 16.25       | V            |

#### LTE FDD Band 5\_Channel Bandwidth 3MHz\_QPSK

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | $P_{Aq}$ (dB) | EIRP (dBm) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|---------------|------------|-----------|-------------|-------------|--------------|
| 825.5           | -17.89          | 2.42          | 8.45                   | 36.82         | 24.96      | 22.81     | 38.45       | 15.64       | V            |
| 836.5           | -17.77          | 3.46          | 8.45                   | 36.82         | 24.04      | 21.89     | 38.45       | 16.56       | V            |
| 847.5           | -18.02          | 2.53          | 8.36                   | 36.82         | 24.63      | 22.48     | 38.45       | 15.97       | V            |

#### LTE FDD Band 5\_Channel Bandwidth 5MHz\_QPSK

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | $P_{Aq}$ (dB) | EIRP (dBm) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|---------------|------------|-----------|-------------|-------------|--------------|
| 826.5           | -18.56          | 2.42          | 8.45                   | 36.82         | 24.29      | 22.14     | 38.45       | 16.31       | V            |
| 836.5           | -16.86          | 3.46          | 8.45                   | 36.82         | 24.95      | 22.8      | 38.45       | 15.65       | V            |
| 846.5           | -17.97          | 2.53          | 8.36                   | 36.82         | 24.68      | 22.53     | 38.45       | 15.92       | V            |

#### LTE FDD Band 5\_Channel Bandwidth 10MHz\_QPSK

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | $P_{Aq}$ (dB) | EIRP (dBm) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|---------------|------------|-----------|-------------|-------------|--------------|
| 829.0           | -18.18          | 2.42          | 8.45                   | 36.82         | 24.67      | 22.52     | 38.45       | 15.93       | V            |
| 836.5           | -16.64          | 3.46          | 8.45                   | 36.82         | 25.17      | 23.02     | 38.45       | 15.43       | V            |
| 844.0           | -18.02          | 2.53          | 8.36                   | 36.82         | 24.63      | 22.48     | 38.45       | 15.97       | V            |

**LTE FDD Band 5\_Channel Bandwidth 1.4MHz\_16QAM**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Aq</sub> (dB) | EIRP (dBm) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-----------|-------------|-------------|--------------|
| 824.7           | -18.63                 | 2.42                 | 8.45                            | 36.82                | 24.22      | 22.07     | 38.45       | 16.38       | V            |
| 836.5           | -18.26                 | 3.46                 | 8.45                            | 36.82                | 23.55      | 21.4      | 38.45       | 17.05       | V            |
| 848.3           | -17.78                 | 2.53                 | 8.36                            | 36.82                | 24.87      | 22.72     | 38.45       | 15.73       | V            |

**LTE FDD Band 5\_Channel Bandwidth 3MHz\_16QAM**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Aq</sub> (dB) | EIRP (dBm) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-----------|-------------|-------------|--------------|
| 825.5           | -18.2                  | 2.42                 | 8.45                            | 36.82                | 24.65      | 22.5      | 38.45       | 15.93       | V            |
| 836.5           | -16.82                 | 3.46                 | 8.45                            | 36.82                | 24.99      | 22.84     | 38.45       | 15.59       | V            |
| 847.5           | -18.25                 | 2.53                 | 8.36                            | 36.82                | 24.4       | 22.25     | 38.45       | 17.35       | V            |

**LTE FDD Band 5\_Channel Bandwidth 5MHz\_16QAM**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Aq</sub> (dB) | EIRP (dBm) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-----------|-------------|-------------|--------------|
| 826.5           | -18                    | 2.42                 | 8.45                            | 36.82                | 24.85      | 22.7      | 38.45       | 15.75       | V            |
| 836.5           | -17.03                 | 3.46                 | 8.45                            | 36.82                | 24.78      | 22.63     | 38.45       | 15.82       | V            |
| 846.5           | -18.51                 | 2.53                 | 8.36                            | 36.82                | 24.14      | 21.99     | 38.45       | 16.46       | V            |

**LTE FDD Band 5\_Channel Bandwidth 10MHz\_16QAM**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Aq</sub> (dB) | EIRP (dBm) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-----------|-------------|-------------|--------------|
| 829.0           | -18.25                 | 2.42                 | 8.45                            | 36.82                | 24.6       | 22.45     | 38.45       | 16          | V            |
| 836.5           | -16.55                 | 3.46                 | 8.45                            | 36.82                | 25.26      | 23.11     | 38.45       | 15.34       | V            |
| 844.0           | -18.59                 | 2.53                 | 8.36                            | 36.82                | 24.06      | 21.91     | 38.45       | 16.54       | V            |




## 4.2 Peak-to-Average Ratio (PAR)

### LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

### TEST CONFIGURATION

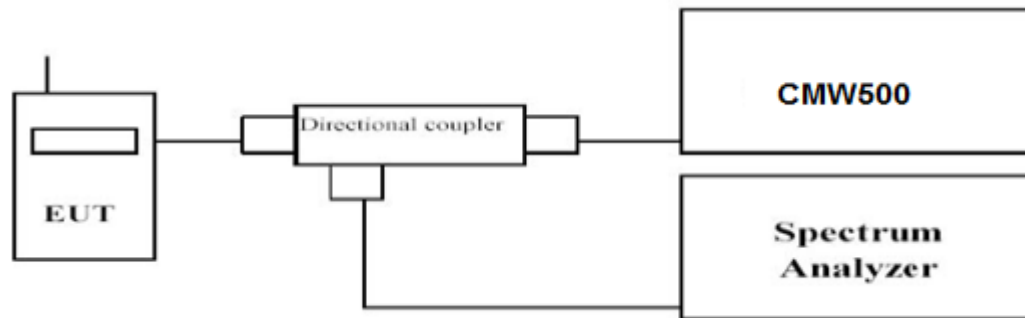

### TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
  - 1). for continuous transmissions, set to 1 ms;
  - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

### TEST RESULTS

Remark:

1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.

| LTE FDD Band 5       |                 |                |          |       |
|----------------------|-----------------|----------------|----------|-------|
| TX Channel Bandwidth | Frequency (MHz) | RB Size/Offset | PAPR(dB) |       |
|                      |                 |                | QPSK     | 16QAM |
| 1.4 MHz              | 824.7           | 1RB#0          | 5.31     | 6.47  |
|                      | 836.5           |                | 5.40     | 6.35  |
|                      | 848.3           |                | 4.70     | 5.50  |
| 3 MHz                | 825.5           | 1RB#0          | 5.32     | 6.54  |
|                      | 836.5           |                | 5.48     | 6.37  |
|                      | 847.5           |                | 4.88     | 5.69  |
| 5 MHz                | 826.5           | 1RB#0          | 5.17     | 5.87  |
|                      | 836.5           |                | 5.45     | 6.05  |
|                      | 846.5           |                | 4.95     | 5.66  |
| 10 MHz               | 829.0           | 1RB#0          | 5.20     | 6.35  |
|                      | 836.5           |                | 5.50     | 6.41  |
|                      | 844.0           |                | 4.96     | 5.80  |




## LTE FDD Band 5- 1.4 MHz Channel BandwidthPAPR


QPSK

16QAM

## Low Channel

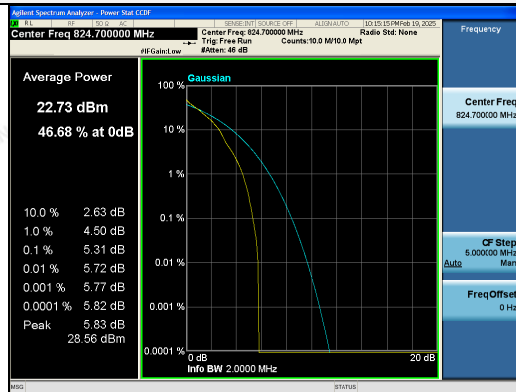


1RB#0

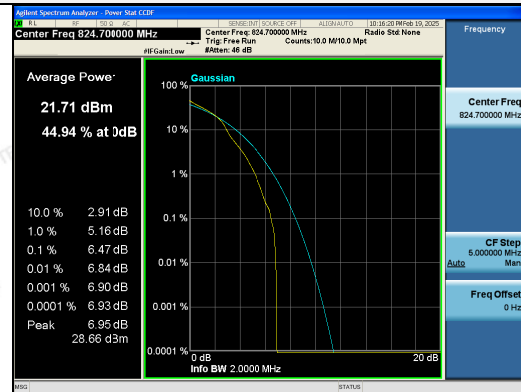


1RB#0

## Middle Channel

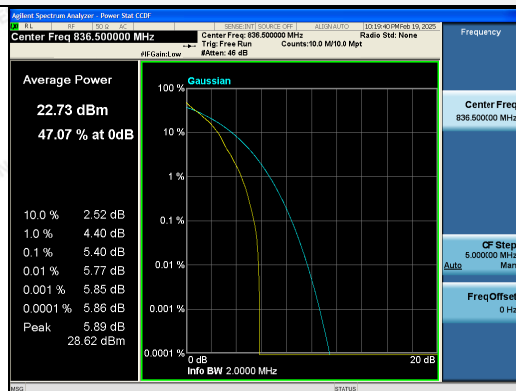

1RB#0

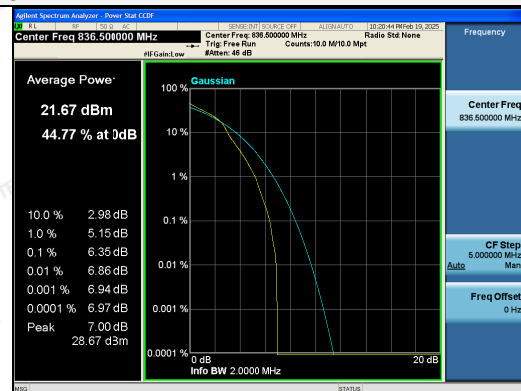


1RB#0


## High Channel





1RB#0

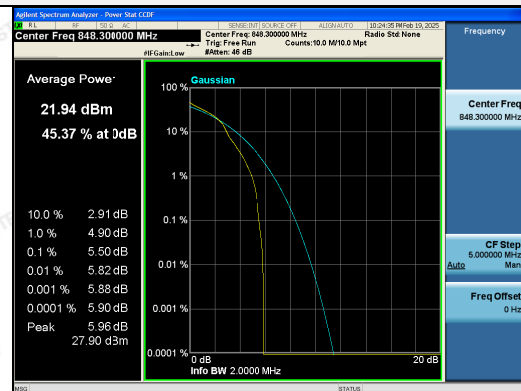

1RB#0

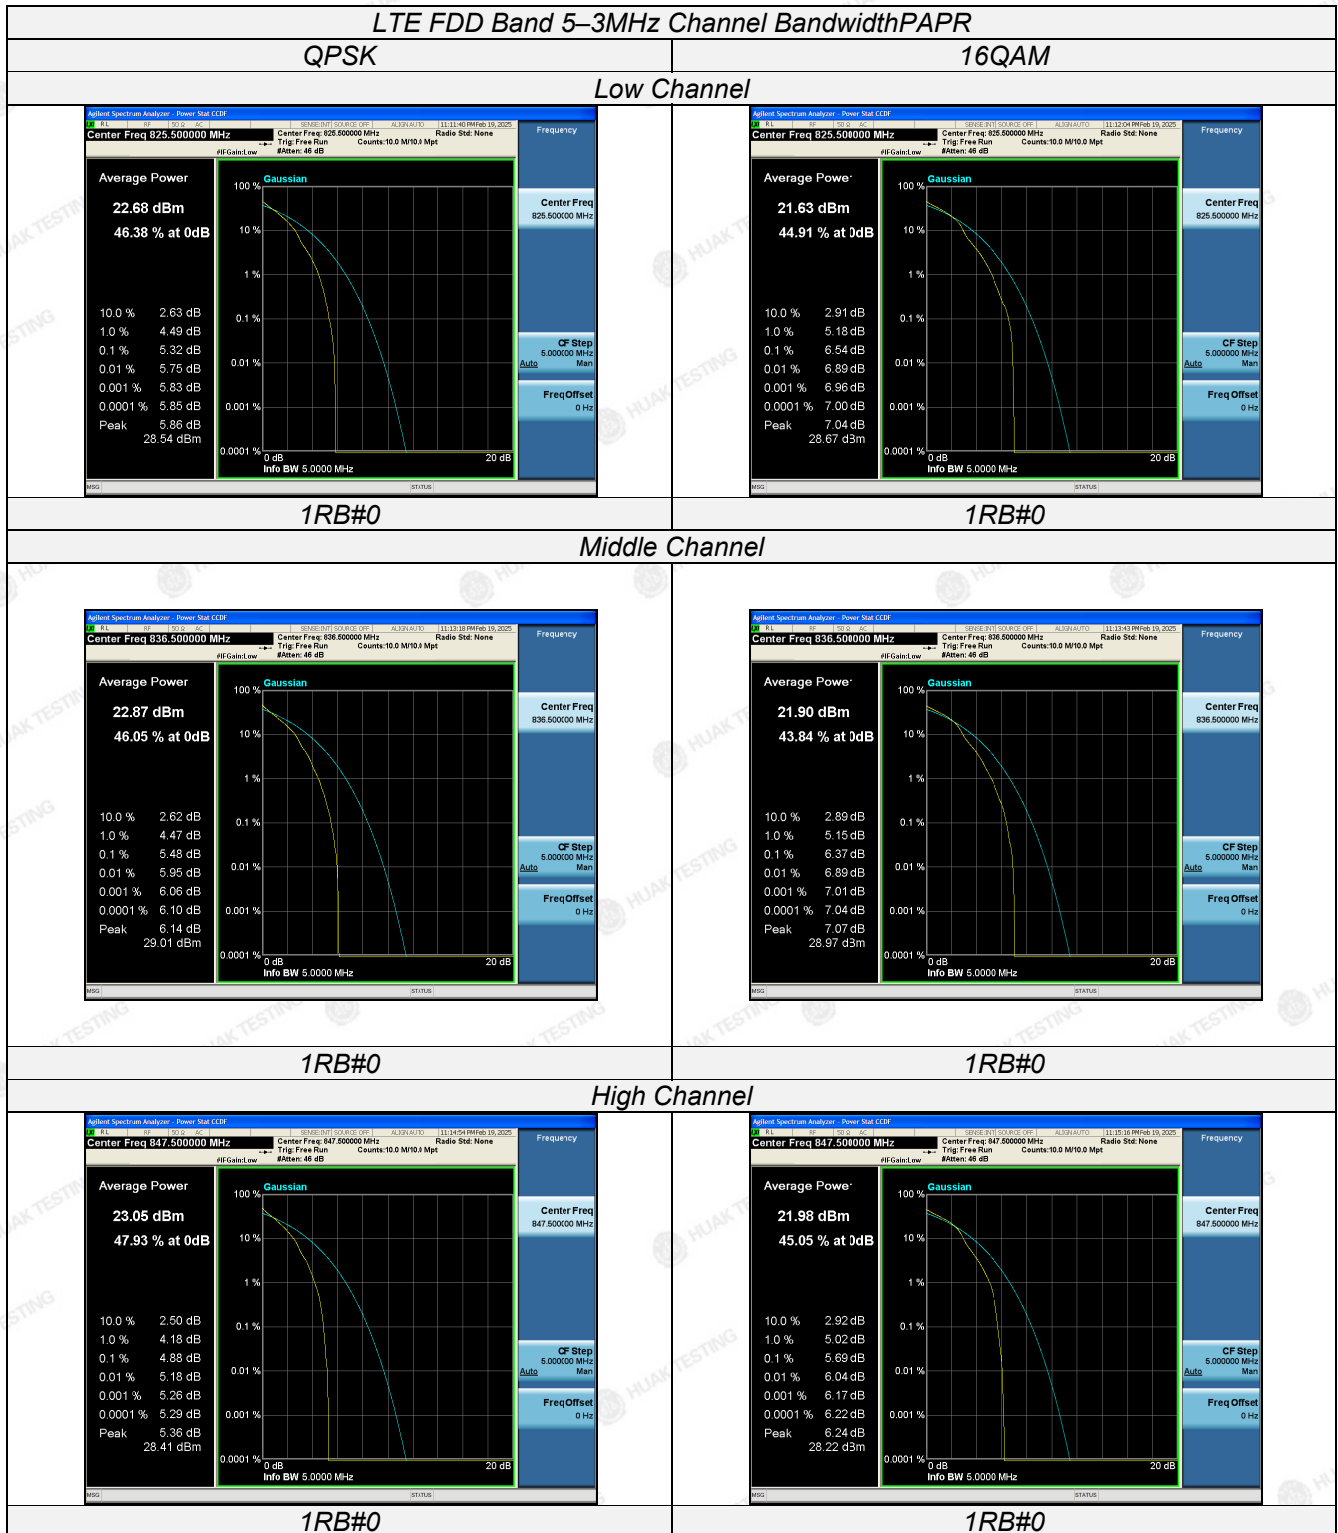

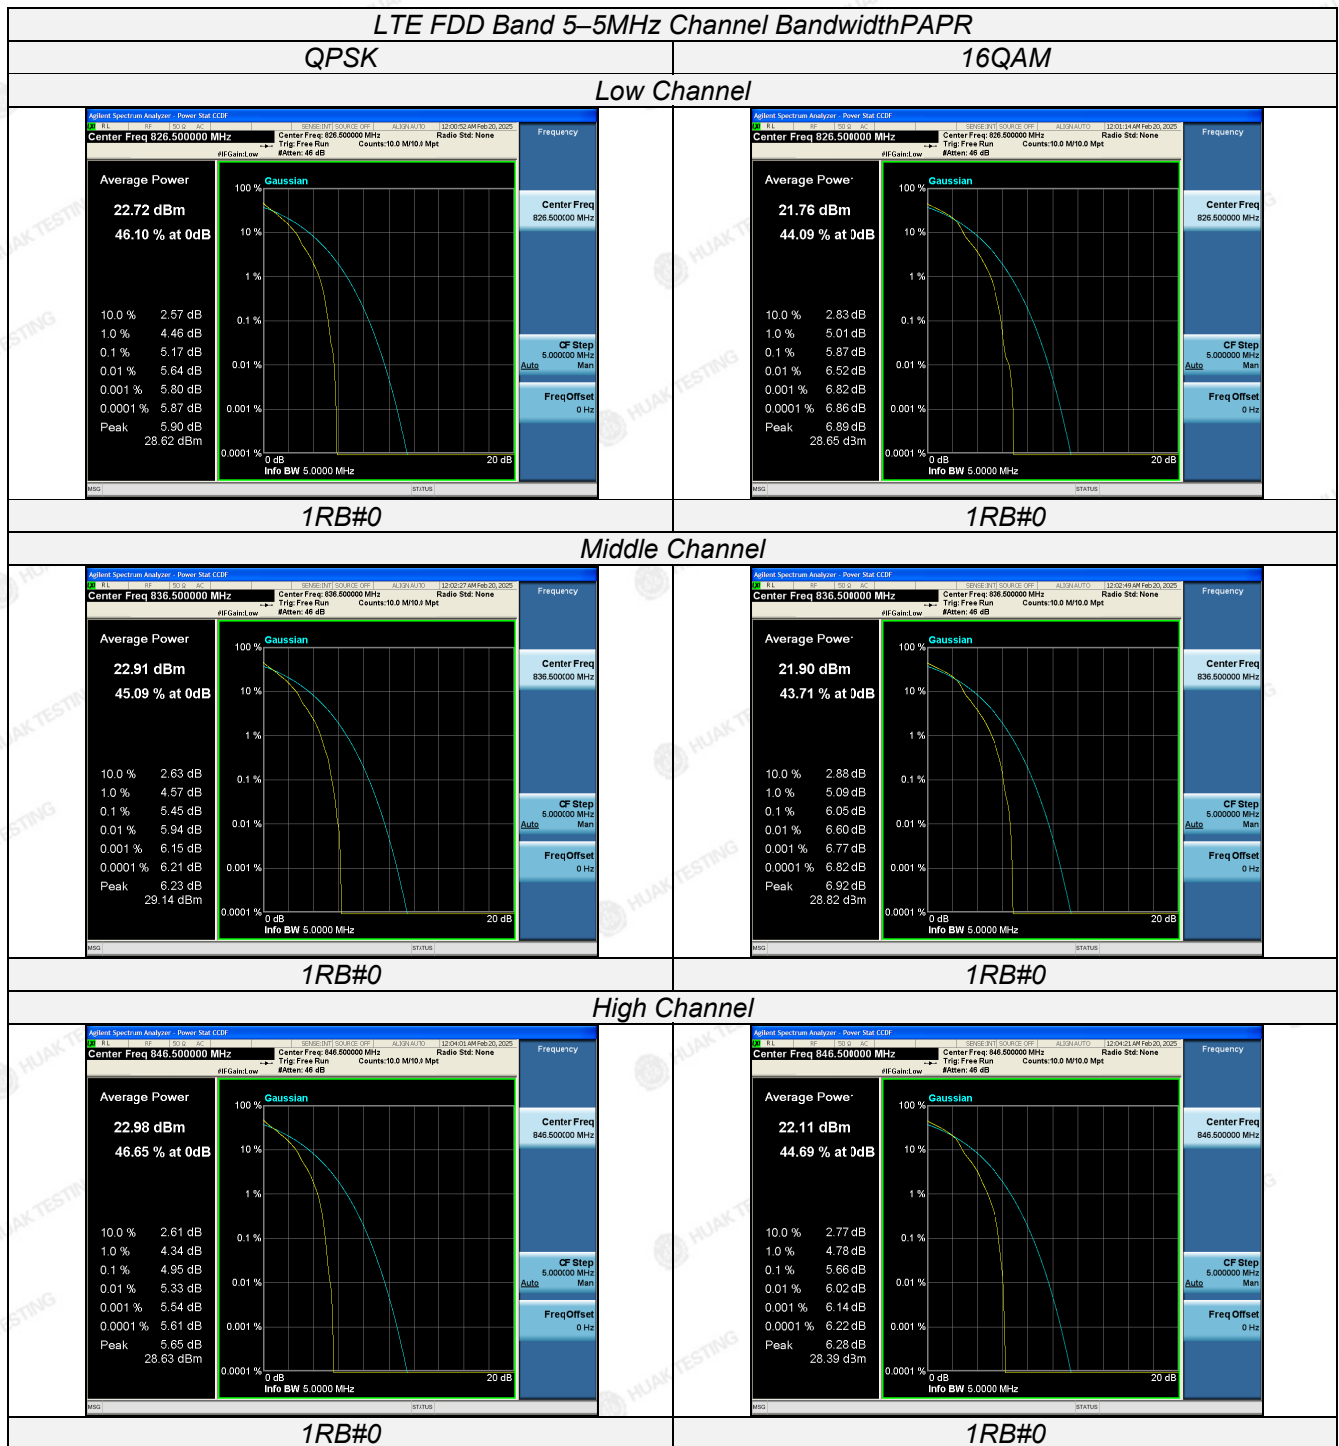

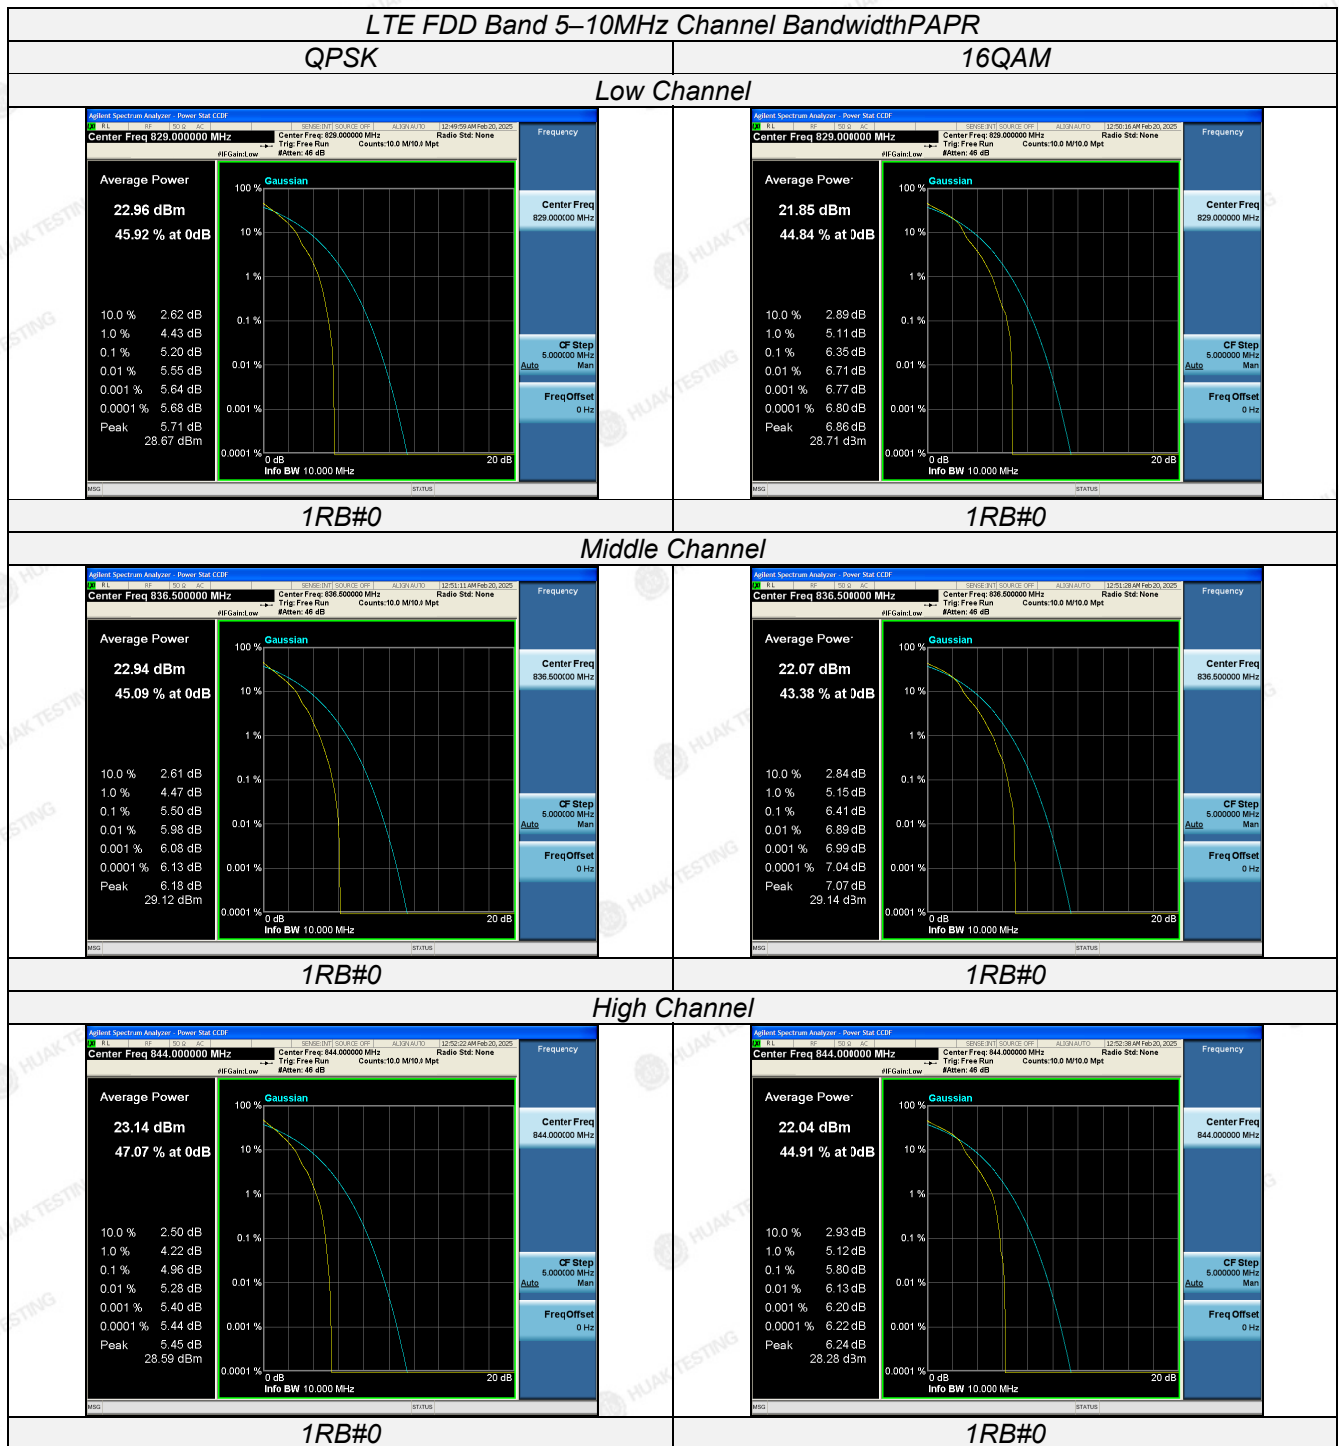




### 4.3 Occupied Bandwidth and Emission Bandwidth

#### LIMIT

N/A

#### TEST CONFIGURATION

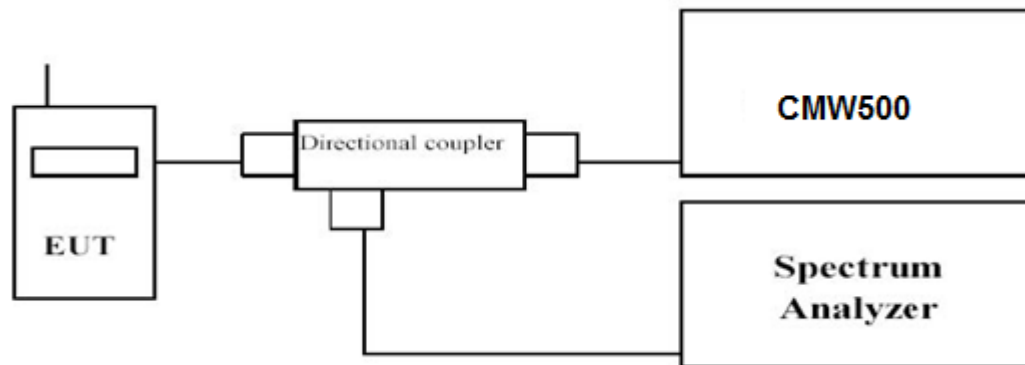

#### TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded.

Set RBW was set to about 1% of emission BW, VBW  $\geq 3$  times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

#### TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.

| LTE FDD Band 5       |                |                 |                                 |       |                              |        |
|----------------------|----------------|-----------------|---------------------------------|-------|------------------------------|--------|
| TX Channel Bandwidth | RB Size/Offset | Frequency (MHz) | -26dBc Emission bandwidth (MHz) |       | 99% Occupied bandwidth (MHz) |        |
|                      |                |                 | QPSK                            | 16QAM | QPSK                         | 16QAM  |
| 1.4 MHz              | 6RB#0          | 824.7           | 1.302                           | 1.295 | 1.0940                       | 1.1012 |
|                      |                | 836.5           | 1.286                           | 1.292 | 1.0936                       | 1.0944 |
|                      |                | 848.3           | 1.302                           | 1.277 | 1.0980                       | 1.0901 |
| 3 MHz                | 15RB#0         | 825.5           | 2.995                           | 2.953 | 2.7049                       | 2.6930 |
|                      |                | 836.5           | 2.982                           | 2.986 | 2.6957                       | 2.6970 |
|                      |                | 847.5           | 2.965                           | 2.968 | 2.7062                       | 2.6983 |
| 5 MHz                | 25RB#0         | 826.5           | 5.037                           | 4.991 | 4.5138                       | 4.5048 |
|                      |                | 836.5           | 5.009                           | 5.044 | 4.4995                       | 4.5118 |
|                      |                | 846.5           | 5.020                           | 5.040 | 4.5099                       | 4.5286 |
| 10 MHz               | 50RB#0         | 829.0           | 9.950                           | 9.878 | 9.0055                       | 8.9906 |
|                      |                | 836.5           | 9.912                           | 9.942 | 8.9904                       | 8.9819 |
|                      |                | 844.0           | 9.902                           | 9.902 | 8.9750                       | 8.9775 |





## LTE FDD Band 5- 1.4 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



## Low Channel

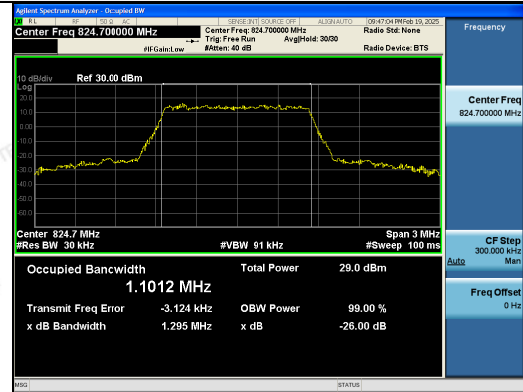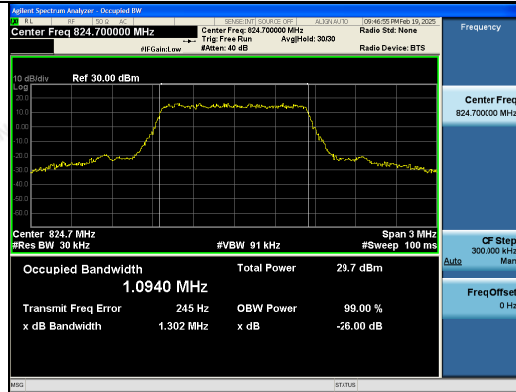

6RB#0

6RB#0



## Middle Channel

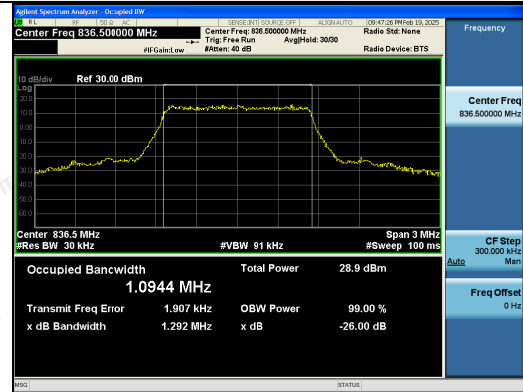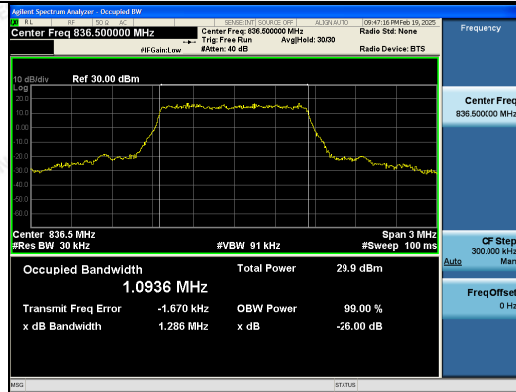

6RB#0

6RB#0

## High Channel

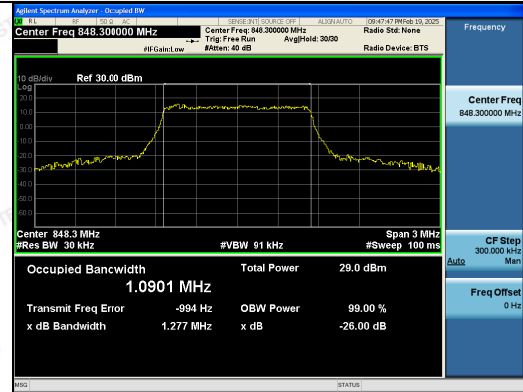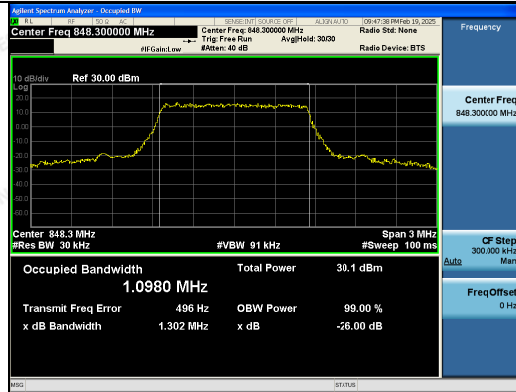

6RB#0

6RB#0





## LTE FDD Band 5-3MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



## Low Channel

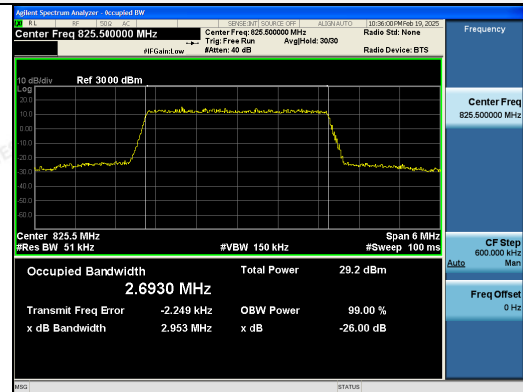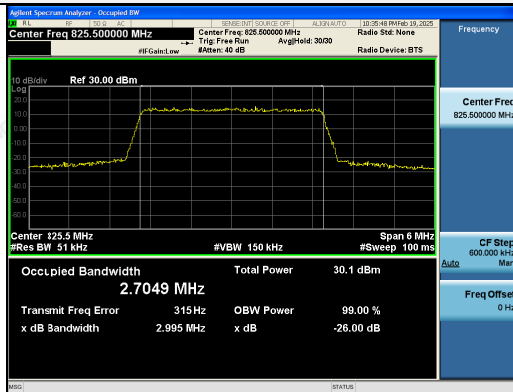

15RB#0

15RB#0



## Middle Channel

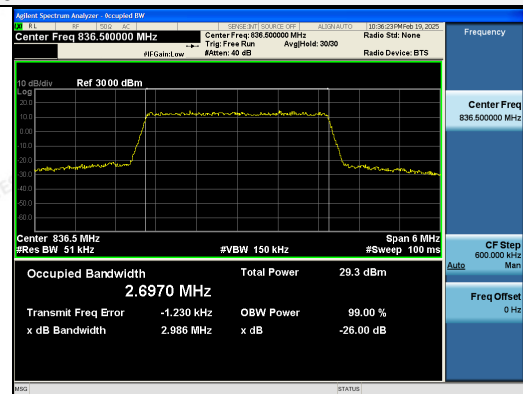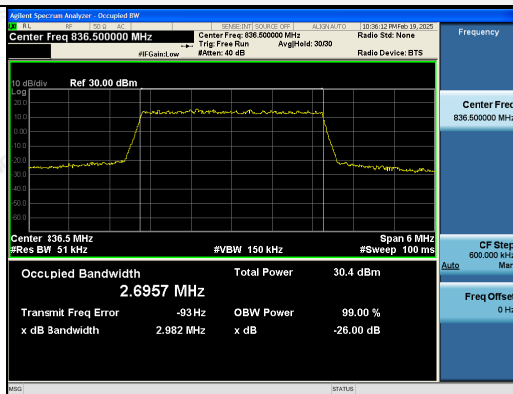

15RB#0


15RB#0

## High Channel

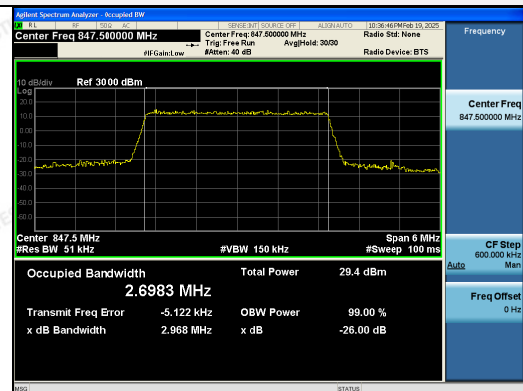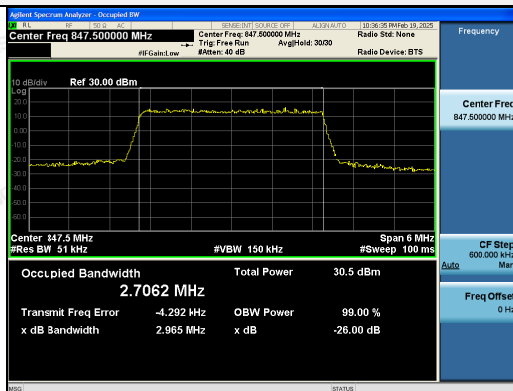

15RB#0

15RB#0

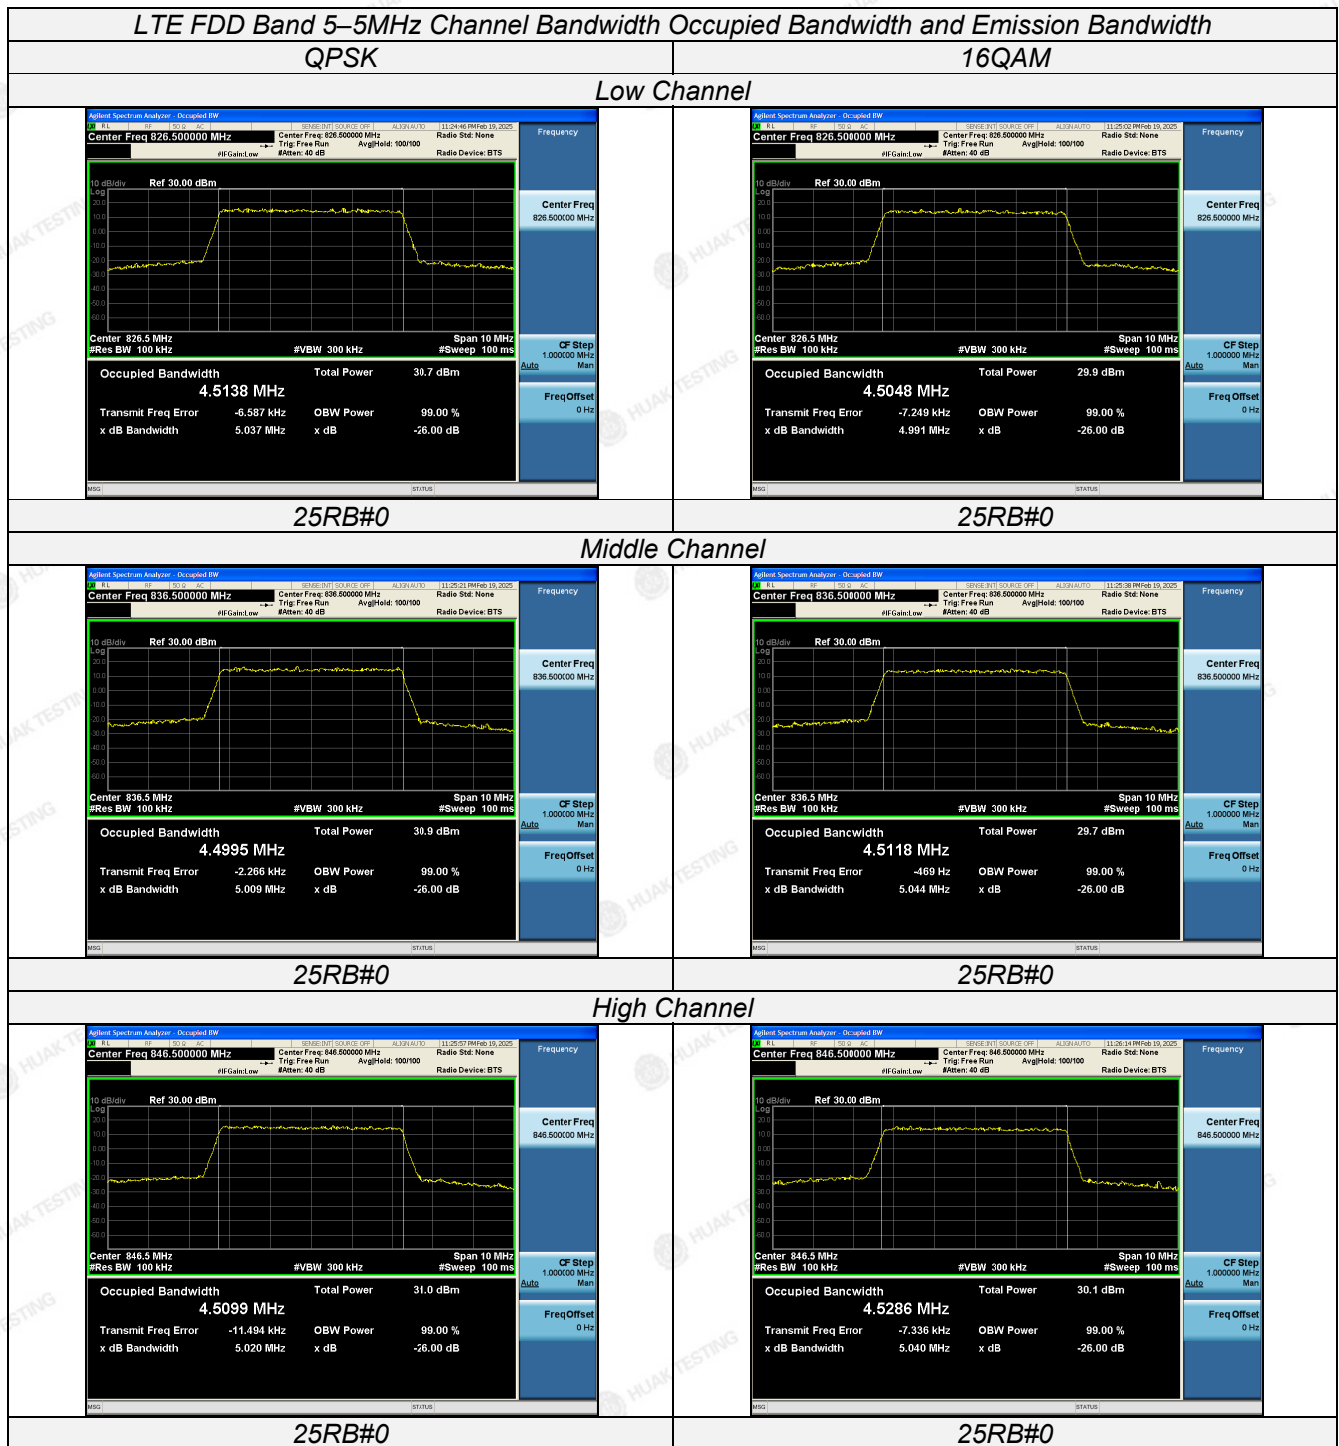




## LTE FDD Band 5-10MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth


## QPSK

## Low Channel

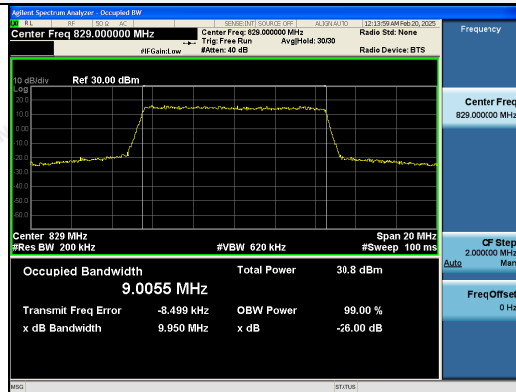


## 16QAM

## Low Channel

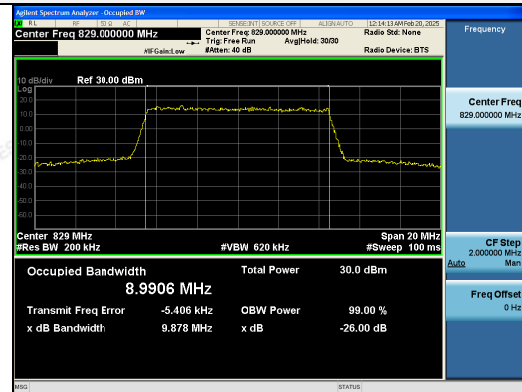


## 50RB#0

## Middle Channel

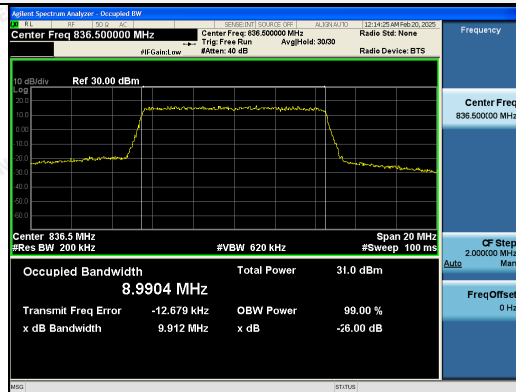


## 50RB#0

## Middle Channel

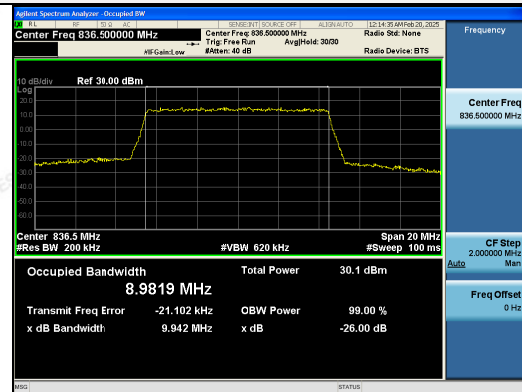

## 50RB#0

## High Channel

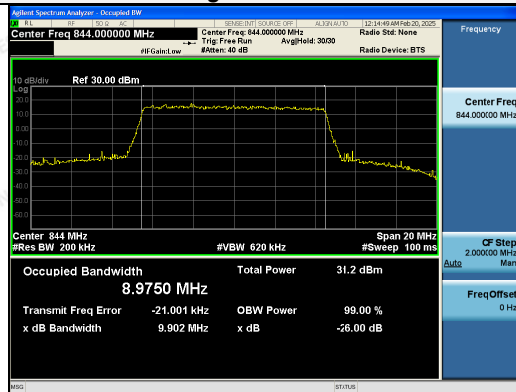

## 50RB#0

## High Channel



## 50RB#0

## 50RB#0




#### 4.4 Band Edge Compliance

##### LIMIT

Per FCC §24.238 the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

##### TEST CONFIGURATION

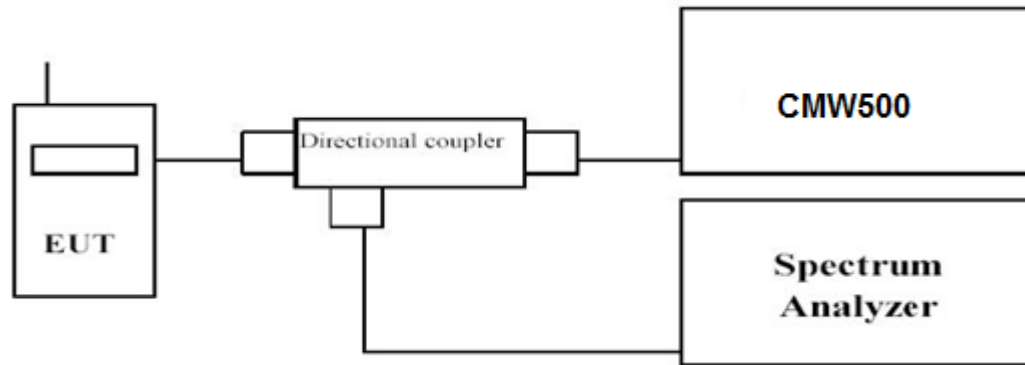

##### TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum.

##### TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.

