


SM 16

USER MANUAL

4IN1 SPEAKER


- Bluetooth Speaker
- Mood Light&Wake Up Light
- Sleeping Machine
- Alarm Clock With Snooze

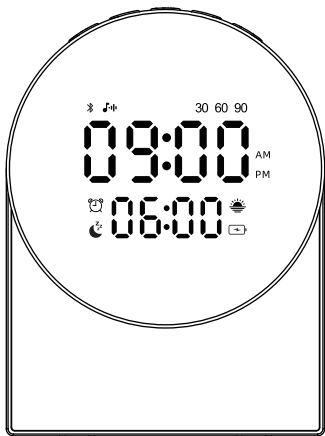

BASIC FEATURES

Item Size: 99*54*124mm	Battery: 2000mAh
Input: 5V/1A	Charging Time: 3-4h
Working Time: 3-4h	
◆Speaker:	
Bluetooth: V5.3	Speaker: 8W
◆Led Night Light:	
Led Qty: 14 PCS	Led Type: Warm

PRODUCT DESCRIPTION

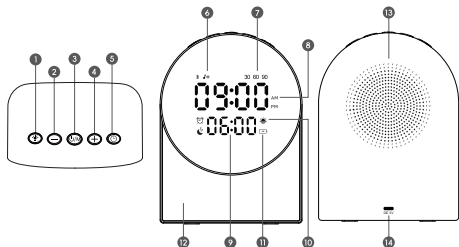

① Led Light Control Button	⑧ Time Display Area
② Previous Track Or Volume Down Button	⑨ Alarm Clock Display Area
③ Power ON/OFF, or Mode/pause Control Button	⑩ Wake Up Light ON/OFF Display Area
④ Next Track Or Volume Up Button	⑪ Charging Indicator Display Area
⑤ Timer/time/alarm Clock Setting Button	⑫ Led Light Area
⑥ Modes Display Area	⑬ Loudspeaker Area
⑦ Timer Display Area	⑭ Type C Power Input Slot

REMOTE CONTROL

Long Press 2 Seconds to Power On/Off

Short Press once to turn down Alarm clock display to 75%/50%/25%/0% in turn

1.Short Press once to Switch to Sleeping Sound from Bluetooth Mode.

2.Short Press Once again for timer 30/60/90 Minutes in turn.
3.Short Press four times to go back to normal no-Timer Mode.

Pause/Play Button in Bluetooth/Sleeping Sound Mode

Previous Track control Button in Bluetooth/Sleeping Sound Mode

1.Long Press 2 Seconds to Go Through Time Setting.
2.Fast Press twice to Set 12/24 time format.

Light Control Button: Long Press 2 Seconds to Turn ON/OFF the Light,Short Press to Adjust the Brightness within Five Levels

Short Press once to go through Bluetooth Mode

1.Volume Up control button Against Bluetooth or Sleeping Sound Mode
2.Adjusting the time/Alarm etc in Time Setting Mode"

Next Track control Button in Bluetooth/Sleeping Sound Mode

1.Volume Down control button Against Bluetooth or Sleeping Sound Mode
2.Adjusting the time/Alarm etc in Time Setting Mode"

1.Long Press 2 Seconds to Go Through Alarm Setting.
2.Under Alarm setting mode, Short Press once to Set Wake up Light/Alarm Song/Alarm Volume/Alarm. Frequency/Alarm On/OFF In turn.
3 Press Once to get Snooze during Alarm Ring.
4.Short Press twice Switch On/Off Alarm Clock.



HOW TO OPERATE LED LIGHT?

Mood light

Long press 2 seconds the light button [] to turn on/off the led light,Short press it to choose the brightness which fit you best,There are total five brightness levels for choice.

Wake up light

It will be activated and lighting on slowly from 0% to 100% within 15 minutes before alarm clock setting, follow the Alarm Clock setting, Choose the "L ON" then Wake up light icon on;

HOW TO CONNECT BLUETOOTH?

Long press 2 seconds button [] to turn on the device, The default is Bluetooth mode, And led light on time area will display " *BLUE* " then go back to time display in 2 seconds,

[] at the mode area will flicker fast at the same time. Start pairing automatically once Bluetooth on, Follow the operating instruction of your Bluetooth device such as phone or pad etc, And allow it to search Bluetooth state, After a few seconds your Bluetooth device will discover the Bluetooth speaker under "SM16", Select this and your device will confirm this pairing. You can start play music through the speaker.

Short press [] to pause the Bluetooth playing;

Press once [] to go previous track, or long press to get volume down.

Press once [] to go next track, or long press to get volume up.

The led icon [] on mode display area will get fast flicker while waiting for pairing;

And will get constant when paired and playing;

HOW TO PLAY SLEEPING SOUNDS?

Short press twice the button [] to switch to the sleeping sound mode, The led light on time area will display " *SLEEP* " then go back to time display in 2 seconds, [] at the mode area will be constant display at the same time.

There are total 20 optional sleeping sounds (refer to appendix)

Long press [] to get volume down, Or press once to go previous sleeping sound.

Long press [] to get volume up, Or press once to go next sleeping sound.

Short press the button [] to pause the playing song;

Timer Settings via Short Press of []

1st Press → 30-minute countdown (display shows "30")

2nd Press → 60-minute countdown (display shows "60")

3rd Press → 90-minute countdown (display shows "90")

4th Press → Turn off the timer.

HOW TO SET CLOCK/ALARM?

Long press 2 seconds the button [Ⓢ] to enter the clock setting mode. At this point the number of hours [00:00] will flicker, Adjust the hour by pressing [⊕] or [⊖].

Short press the button [Ⓢ] again to switch to the minute [00:00] setting area, The minutes will flicker, Adjust the minute by pressing [⊕] or [⊖].

Short press the button [Ⓢ] again to enter the alarm clock setting mode. At this point the number of hours [00:00] will flicker, Adjust the hour by pressing [⊕] or [⊖].

Short press the button [Ⓢ] again to switch to the alarm minute setting area, The minutes

[00:00] will flicker adjust the minute by pressing [⊕] or [⊖].

Short press the button [Ⓢ] again to switch to set wake up light, Then choose ON/OFF by pressing [⊕] or [⊖]. "L ON" means wake up light on, the icon [☀] will display on, The wake up light will be activated and lighting on slowly from 0% to 100% within 15 minutes before alarm clock ringing.

"L OF" means wake up light not be activated, The icon [☀] will not display on.

Short press the button [Ⓢ] again to switch to choose the alarm sound setting, Then choose the alarm song by pressing [⊕] or [⊖]. There are total 6 optional alarms (6 melody songs) you will see the clock LED light display optional numbers: 01/02/03/04/05/06

Short press the button [Ⓢ] again to go through the alarm volume setting, Then choose the alarm song volume by pressing [⊕] or [⊖] from 10/20/30/40/50/60/70/80/90/100%.

Short press the button [Ⓢ] again to switch to the alarm ONE/ALL setting, Choose ONE/ALL by pressing [⊕] or [⊖].

One: the alarm clock will just ring once at the time set.

All: the alarm clock will ring every day at the time set.

Short press the button [Ⓢ] again to go through alarm ON/OFF setting, Choose ON/OFF by pressing [⊕] or [⊖]. Once you choose alarm "ON", The alarm icon [🔔] will display on, The alarm will ring against the alarm setting time.

Snooze function will be activated via pressing button [] once while alarm ringing, the snooze icon [] will display on, The Alarm ringing will last 2 minutes each time, and alarm again in each 5 Minutes, total five times as a snooze cycle each day.

Press any button except [] to end the snooze and ring while alarm ringing, the snooze icon [] will display off.

After above steps are done in sequence, Short press the button [] again or do not press any button for 5 seconds, The device setting will be completed and go back to main screen display.

Remark:

- 1-Fast Press 2 times the button [] to turn down Alarm clock display to 75% Brightness, Fast Press 2 times again the button [] to turn down Alarm clock display to 50% Brightness, Fast Press 2 times again the button [] to turn down Alarm clock display to 25% Brightness, Fast Press 2 times again the button [] to turn on/off Clock/Alarm display;
- 2-Fast press 3 times this button [] to switch the time between 12h and 24h system.
- 3-Long press 10 seconds this button [] to go through factory restart, You will see the default clock display is 12:00 pm, And default alarm clock display is 08:00 and alarm clock off.
- 4-In order to save the battery power and prolong working time, The time screen display will turn down to 25% brightness in 2 Minutes. Moreover, If the LED light is off, but also Bluetooth not paired or Sleeping Machine paused, The time screen display will turn off in 10 minutes automatically and goes to low power consumption mode, press any button to activate the time display again in this mode.
- 5-Press twice [] to turn on/off Wake up light and Alarm Clock directly.
- 6-Press twice [] to turn On/Off Alarm clock directly.

BUILT-IN BATTERY

Battery capacity is 2000mAh, Please charge this device by the type-c charging cable provided. It will last 3-4h for full charge;

Low battery: If the power voltage is lower than 3.2V, The charging icon [

Notice

- Do not let children play the product.
- Do not hit or beat the product.
- Do not use in very humid and high temperature environments
- Do not throw the product into fire.
- Do not block speaker's net above the body
- Please send to repair when the product is broken. Do not disassemble it by yourself.
- It's not covered under warranty when the product has metal of rust, surface spelling and other natural oxidation.

Battery removal/disposal

Your product contains batteries which cannot be disposed with normal household waste. Doing so may harm the environment. Please inform yourself about the local rules on separate collection of batteries because correct disposal helps to prevent negative consequences for the environmental and human health. Should your product develop a fault and your battery needs replacing.

Please do not remove the battery!



MADE IN CHINA

Appendix: Full List of Ambient Sounds

NO.	Sound	NO.	Sound
01	Silent Night	11	Seagulls
02	Kiss the Rain	12	Babbling Brook
03	Ode to Joy	13	Thunder and Rain
04	Castle in the Sky	14	Rainfall
05	Fur Elise	15	Cricket Chirps
06	Music Box	16	Nature's Symphony
07	Brahms' Lullaby	17	Campfire
08	Little Star	18	Bird Songs
09	Nearby Ocean Waves	19	Frog Croaks
10	Faraway Ocean Waves	20	Night Dog Barking

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.