TEST REPORT

Report No. .....:	**CTC2025018011**
FCC ID.....:	**2BNWDCVR-655-128C**
Applicant .....:	**Avantis Education Limited**
Address.....:	Unit 2 & 3 Jessop Court, Waterwells Business Park, Quedgeley, Gloucester, GL2 2AP UK
Manufacturer.....:	SHENZHEN SKYWORTH NEW WORLD TECHNOLOGY CO.,LTD.
Address.....:	508, Block A,SKYWORTH Building, Gaoxin AVE. 1.S Nanshan District, ShenZhen, China.
Product Name .....:	**VR Headset**
Trade Mark .....:	CLASSVR
Model/Type reference.....:	CVR-655-128C
Listed Model(s) .....:	CVR-655-128
Standard .....:	**FCC CFR Title 47 Part 15 Subpart C Section 15.247**
Test Report Form No .....:	CTC-TR-057_A1
Master TRF.....:	Dated 2024-09-20
Date of receipt of test sample.....:	Feb. 24, 2025
Date of testing.....:	Feb. 24, 2025 ~ Mar.21, 2025
Date of issue.....:	Mar. 26, 2025
Result.....:	**PASS**

Compiled by: (Printed name+signature)	Lucy Lan	Lucy Lan
Supervised by: (Printed name+signature)	Eric Zhang	Eric Zhang
Approved by: (Printed name+signature)	Totti Zhao	Totti Zhao

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The Test Result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

Table of Contents Page

1. TEST SUMMARY 3

1.1. TEST STANDARDS 3
1.2. REPORT VERSION 3
1.3. TEST DESCRIPTION 3
1.4. TEST FACILITY 4
1.5. MEASUREMENT UNCERTAINTY 5
1.6. ENVIRONMENTAL CONDITIONS 5

2. GENERAL INFORMATION 6

2.1. CLIENT INFORMATION 6
2.2. GENERAL DESCRIPTION OF EUT 6
2.3. ACCESSORY EQUIPMENT INFORMATION 7
2.4. OPERATION STATE 8
2.5. MEASUREMENT INSTRUMENTS LIST 10

3. TEST ITEM AND RESULTS 11

3.1. CONDUCTED EMISSION 11
3.2. RADIATED EMISSION 14
3.3. BAND EDGE EMISSIONS (RADIATED) 37
3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED) 62
3.5. DTS BANDWIDTH 110
3.6. OUTPUT POWER 136
3.7. POWER SPECTRAL DENSITY 138
3.8. DUTY CYCLE 152
3.9. ANTENNA REQUIREMENT 154

1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Operation within the bands 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz.

ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.2. Report Version

Revised No.	Report No.	Date of issue	Description
01	CTC2025018011	Mar. 26, 2025	Original

1.3. Test Description

FCC Part 15 Subpart C (15.247)			
Test Item	**Standard Section**	**Result**	**Test Engineer**
Antenna Requirement	15.203	Pass	Marrow
Conducted Emission	15.207	Pass	Marrow
Conducted Band Edge and Spurious Emissions	15.247(d)	Pass	Marrow
Radiated Band Edge and Spurious Emissions	15.205&15.209& 15.247(d)	Pass	Marrow
6dB Bandwidth	15.247(a)(2)	Pass	Marrow
Conducted Max Output Power	15.247(b)(3)	Pass	Marrow
Power Spectral Density	15.247(e)	Pass	Marrow
Transmitter Radiated Spurious	15.209&15.247(d)	Pass	Marrow

Note:

1. The measurement uncertainty is not included in the test result.
2. N/A: means this test item is not applicable for this device according to the technology characteristic of device.

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Add: Room 101 of Building B, Room 107, 108, 207, 208 of Building A, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 “Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1” and TR-100028-02 “Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2” and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

Test Items	Measurement Uncertainty	Notes
DTS Bandwidth	±0.0196%	(1)
Maximum Conducted Output Power	±0.686 dB	(1)
Maximum Power Spectral Density Level	±0.743 dB	(1)
Band-edge Compliance	±1.328 dB	(1)
Unwanted Emissions In Non-restricted Freq Bands	9kHz-1GHz: ±0.746dB 1GHz-26GHz: ±1.328dB	(1)
Conducted Emissions 9kHz~30MHz	±3.08 dB	(1)
Radiated Emissions 30~1000MHz	±4.51 dB	(1)
Radiated Emissions 1~18GHz	±5.84 dB	(1)
Radiated Emissions 18~40GHz	±6.12 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15 °C to 35 °C
Relative Humidity:	20 % to 75 %
Air Pressure:	101 kPa

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

2. GENERAL INFORMATION

2.1. Client Information

Applicant:	Avantis Education Limited
Address:	Unit 2 & 3 Jessop Court, Waterwells Business Park, Quedgeley, Gloucester, GL2 2AP UK
Manufacturer:	SHENZHEN SKYWORTH NEW WORLD TECHNOLOGY CO.,LTD.
Address:	508, Block A,SKYWORTH Building, Gaoxin AVE. 1.S Nanshan District, ShenZhen, China.
Factory:	Shenzhen Skyworth Digital Technology Co.,LTD. Baoan Factory
Address:	2-5F,Integration Multi-Storied Building, Skyworth Science and Technology Industrial Park, Tangtou Industrial Zone, Shiyan Street, Baoan District, Shenzhen city, China.

2.2. General Description of EUT

Product Name:	VR Headset
Trade Mark:	CLASSVR
Model/Type reference:	CVR-655-128C
Listed Model(s):	CVR-655-128
Model Difference:	All models are same with electrical parameters, internal circuit structure, product appearance, PCB layout, Bom and Antenna. But only differ in model name.
Sample ID:	CTC250114-016-S002
Power Supply:	DC 5V/3A, 9V/2A from Adapter
Adapter Model	PDT-003 Input: 100-240V~ 50/60Hz 4.5A max USB-C1 Output:3.3V-21V⎓5A or 5V⎓3A or 9V⎓3A or 15V⎓3A or 20V⎓5A (100W Max) USB-C2/C3 Output: 5V⎓3A or 9V⎓3A or 12V⎓2.5A or 15V⎓2A or 20V⎓1.5A (30W Max) USB-C4/C5/C6/C7 Output: 5V⎓ 3A or 9V⎓2.22A or 12V ⎓ 1.67A (20W Max) USB-A Output: 5V⎓3A or 9V⎓2A or 10V⎓2.25A OR 12⎓1.5A (22.5W Max) USB-C1+USB-C2/C3 Output: 100W+30W USB-C1+USB-C4/C5/C6/C7 Output: 100W+20W (USB-C2+USB-C3) + (USB-C4+US-C5) Output:15W USB-C6+USB-C7+USB-A Output:15W USB-C1+USB-C2/C3+USB-C4/C5+USB-C6/C7/USB-A:100W+30W+20W+20W Total Output:170W (Max)
Hardware Version:	5800-2AVQ920
Software Version:	VQ920-AVN-V1.8.0

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

2.4G Wi-Fi	
Modulation:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/ n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Operation Frequency:	802.11b/ g/ n(HT20)/ ax(HE20): 2412MHz~2462MHz 802.11n(HT40)/ ax(HE40): 2422MHz~2452MHz
Channel Number:	802.11b/ g/ n(HT20)/ ax(HE20): 11 channels 802.11n(HT40)/ ax(HE40): 7 channels
Channel Separation:	5MHz
Antenna Type:	FPC Antenna
Antenna Gain:	Ant1: 1.71dBi; Ant2: 5.1dBi

2.3. Accessory Equipment Information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkPad T460s	/	Lenovo
Cable Information			
Name	Shielded Type	Ferrite Core	Length
USB Cable	Unshielded	NO	150cm
Test Software Information			
Name	Version	/	/
QRCT4	/	/	/

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Operation Frequency List:

Channel	Frequency (MHz)
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

Note: CH 01~CH 11 for 802.11b/g/n(HT20)/ax(HE20), CH 03~CH 09 for 802.11n(HT40)/ax(HE40).

Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain(dBi)
1	NA	NA	FPC Antenna	IPEX	1.71
2	NA	NA	FPC Antenna	IPEX	5.10

For 2.4G, this EUT supports MIMO 2X2 with the unequal antenna gain, and any transmit signals are correlated with each other.

According to KDB 662911 D01, Directional Gain = 10 log[$(10^{G1/20} + 10^{G2/20} + \ldots + 10^{GN/20})^2$ /N] dBi, that is Directional Gain = 10 log[((10^(1.71/20)+10^(5.10/20))^2)/2]=6.58dBi. So output power limit is 30-6.58+6=29.42dBm, the power spectral density limit is 8-6.58+6=7.42dBm/3kHz.

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Data Rated:

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is a worst case mode.

Test Mode	Data Rate (worst mode)
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)/ (HT40)	HT-MCS0
802.11ax(HE20)/ (HE40)	HE-MCS0

Test Mode:

For RF test items:
1.The engineering test program was provided and enabled to make EUT continuous transmit.
2.IEEE 802.11ax mode only supports full RU, so only the full RU is evaluated and measured inside report
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

2.5. Measurement Instruments List

Radiated emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9163	01026	Dec. 24, 2025
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Sep. 25, 2025
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 12, 2025
4	Broadband Amplifier	Schwarzbeck	BBV9743B	259	Dec. 12, 2025
5	Mirowave Broadband Amplifier	Schwarzbeck	BBV9718C	111	Dec. 12, 2025
6	3m chamber 3	YIHENG	EE106	/	Aug. 28, 2026
7	Test Software	FARA	EZ-EMC	FA-03A2	/

Conducted emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	101112	Dec. 12, 2025
2	LISN	R&S	ENV216	101113	Dec. 12, 2025
3	EMI Test Receiver	R&S	ESCI	100524	Dec. 12, 2025
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 12, 2025
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 12, 2025
6	Test Software	R&S	EMC32	6.10.10	/

RF Test System - SRD					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Spectrum Analyzer	R&S	FSV40-N	101654	Aug. 06, 2025
2	High and low temperature test chamber	ESPEC	MT3035	/	Mar. 21, 2025
3	RF Control Unit	Tonscend	JS0806-2	/	Aug. 21, 2025
4	Test Software	Tonscend	JS1120-3	V3.3.38	/

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three years of the antenna.

3. The cable loss has been calculated in test result which connection between each test instruments.

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

3. TEST ITEM AND RESULTS

3.1. Conducted Emission

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

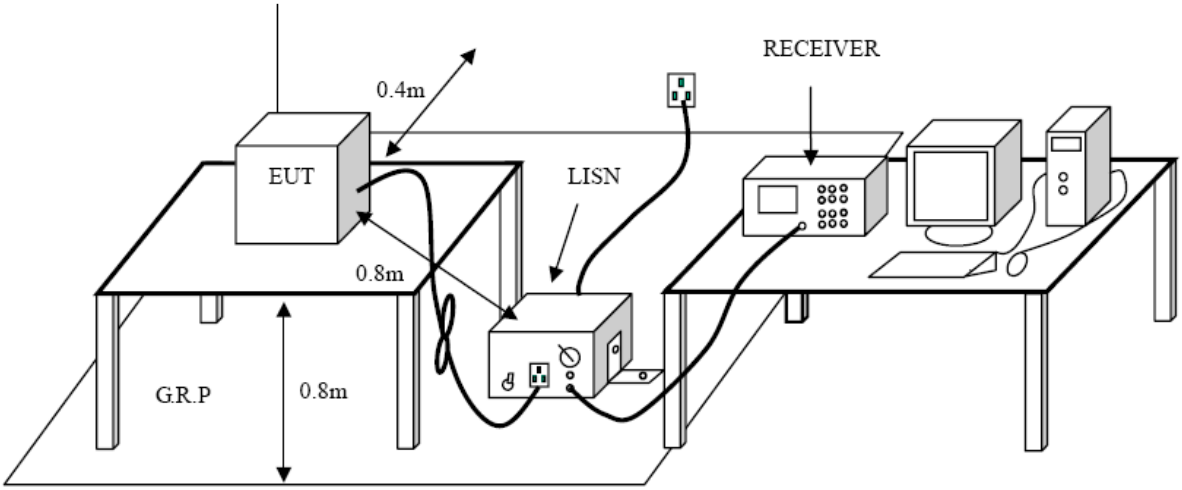

Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50 μH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

Test Mode

Please refer to the clause 2.4.

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Test Result

Test Voltage:	AC 120V/60Hz
Terminal:	Line
Remark:	Only worse case is reported

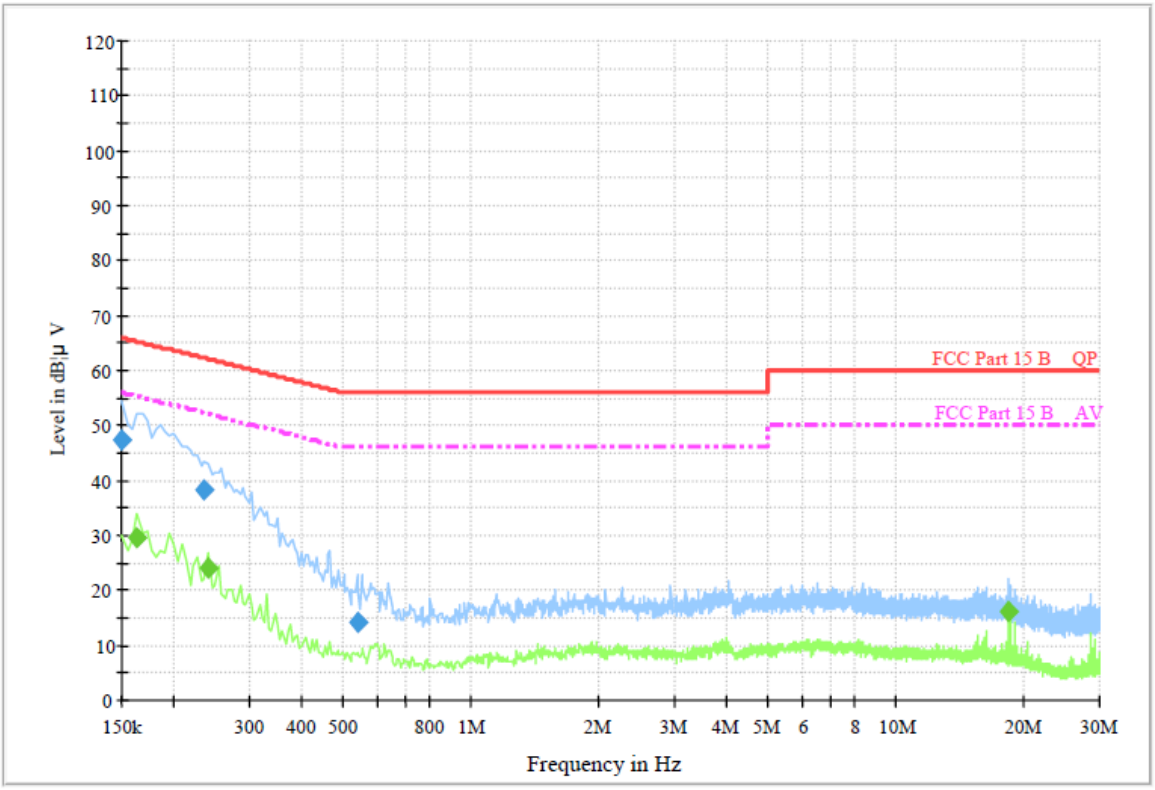

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.150000	47.2	1000.00	9.000	On	L1	9.4	18.8	66.0	
0.235500	38.5	1000.00	9.000	On	L1	9.5	23.8	62.3	
0.537000	14.1	1000.00	9.000	On	L1	9.5	41.9	56.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.163500	29.8	1000.00	9.000	On	L1	9.5	25.5	55.3	
0.240000	24.1	1000.00	9.000	On	L1	9.5	28.0	52.1	
18.244500	16.3	1000.00	9.000	On	L1	9.8	33.7	50.0	

Emission Level = Read Level + Correct Factor

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Test Voltage:	AC 120V/60Hz
Terminal:	Neutral
Remark:	Only worse case is reported

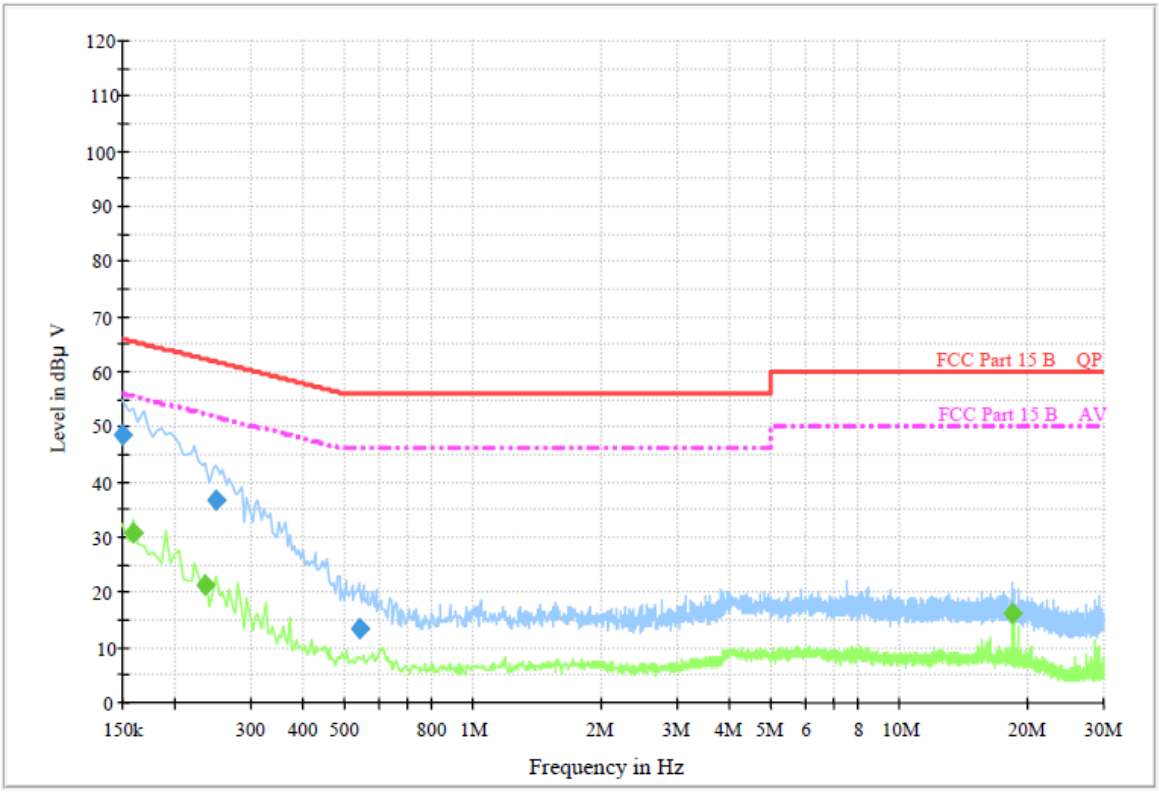

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.150000	48.5	1000.00	9.000	On	N	9.4	17.5	66.0	
0.249000	36.6	1000.00	9.000	On	N	9.4	25.2	61.8	
0.537000	13.6	1000.00	9.000	On	N	9.5	42.4	56.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.159000	30.8	1000.00	9.000	On	N	9.4	24.7	55.5	
0.235500	21.3	1000.00	9.000	On	N	9.4	31.0	52.3	
18.366000	16.3	1000.00	9.000	On	N	9.6	33.7	50.0	

Emission Level = Read Level + Correct Factor

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

3.2. Radiated Emission

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Frequency Range (MHz)	dBμV/m (at 3 meters)	
	Peak	Average
Above 1000	74	54

Note:
(1) The tighter limit applies at the band edges.
(2) Emission Level (dBμV/m)=20log Emission Level (μV/m).

Test Configuration

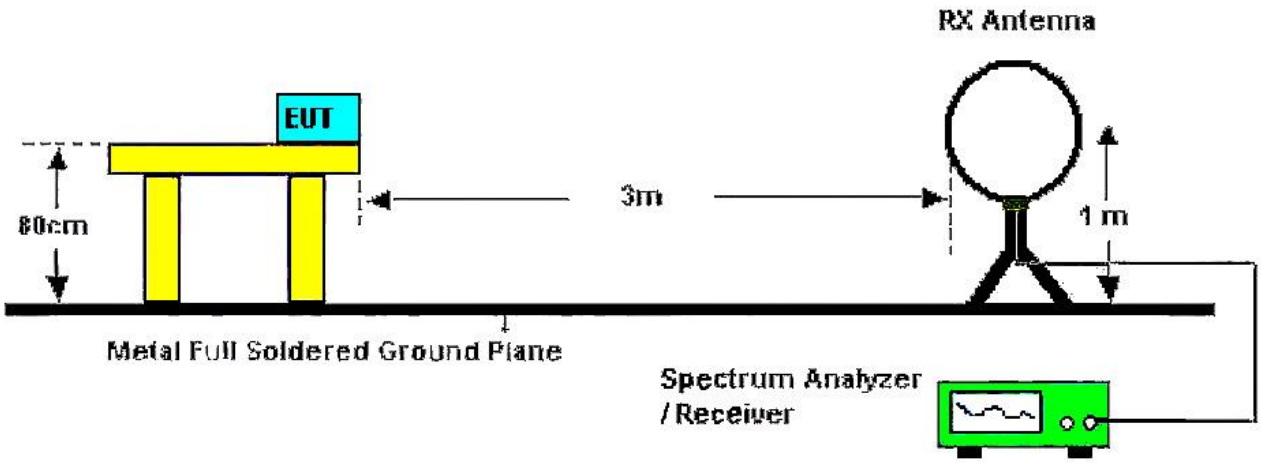

Below 30MHz Test Setup

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

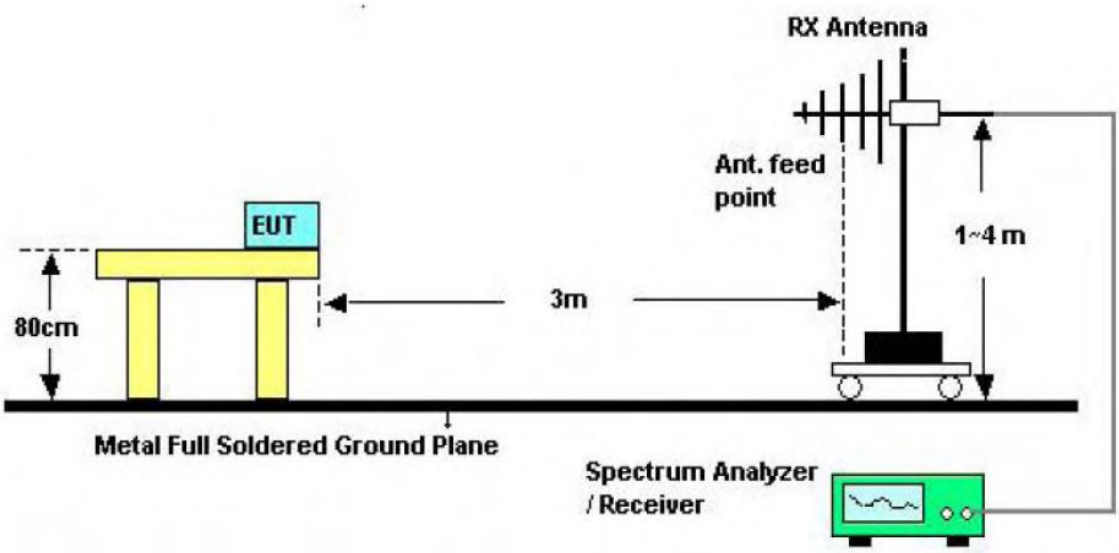

30-1000MHz Test Setup

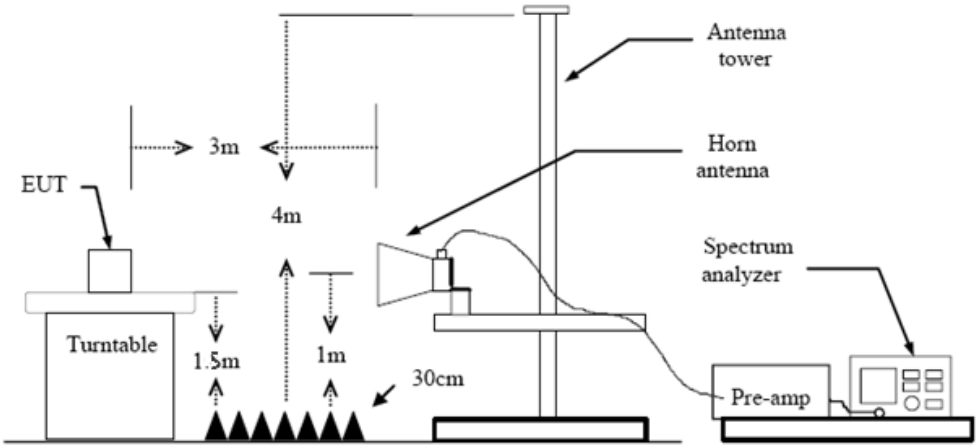

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings

(1) Span shall wide enough to fully capture the emission being measured;
(2) 9k – 150kHz:
RBW=300 Hz, VBW=1 kHz, Sweep=auto, Detector function=peak, Trace=max hold
(3) 0.15M – 30MHz:
RBW=10 kHz, VBW=30 kHz, Sweep=auto, Detector function=peak, Trace=max hold
(4) 30M - 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold

If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(5) From 1 GHz to 10th harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.

Test Mode

Please refer to the clause 2.4.

Test Result

9 kHz~30 MHz

From 9 kHz to 30 MHz: The conclusion is PASS.

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

30MHz-1GHz

Ant. No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	Only worse case is reported.

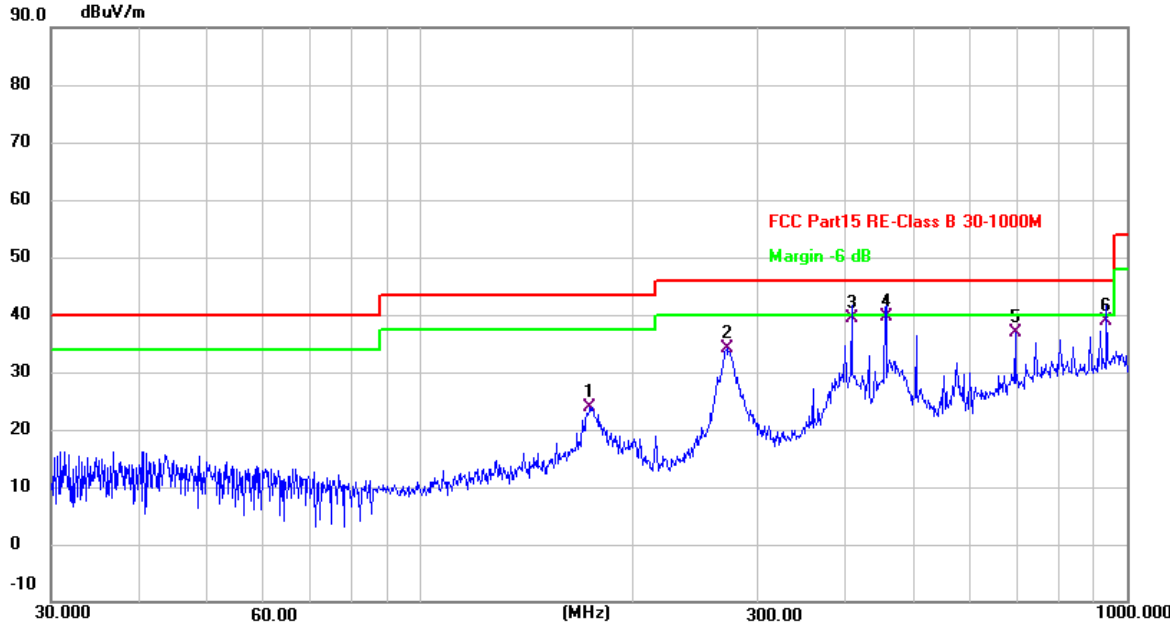

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	173.8135	41.15	-17.32	23.83	43.50	-19.67	QP
2	271.3245	50.71	-16.66	34.05	46.00	-11.95	QP
3	407.5144	51.81	-12.39	39.42	46.00	-6.58	QP
4 *	455.9058	50.68	-10.95	39.73	46.00	-6.27	QP
5	694.4174	42.56	-5.76	36.80	46.00	-9.20	QP
6	935.5463	40.60	-1.66	38.94	46.00	-7.06	QP

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	Only worse case is reported.

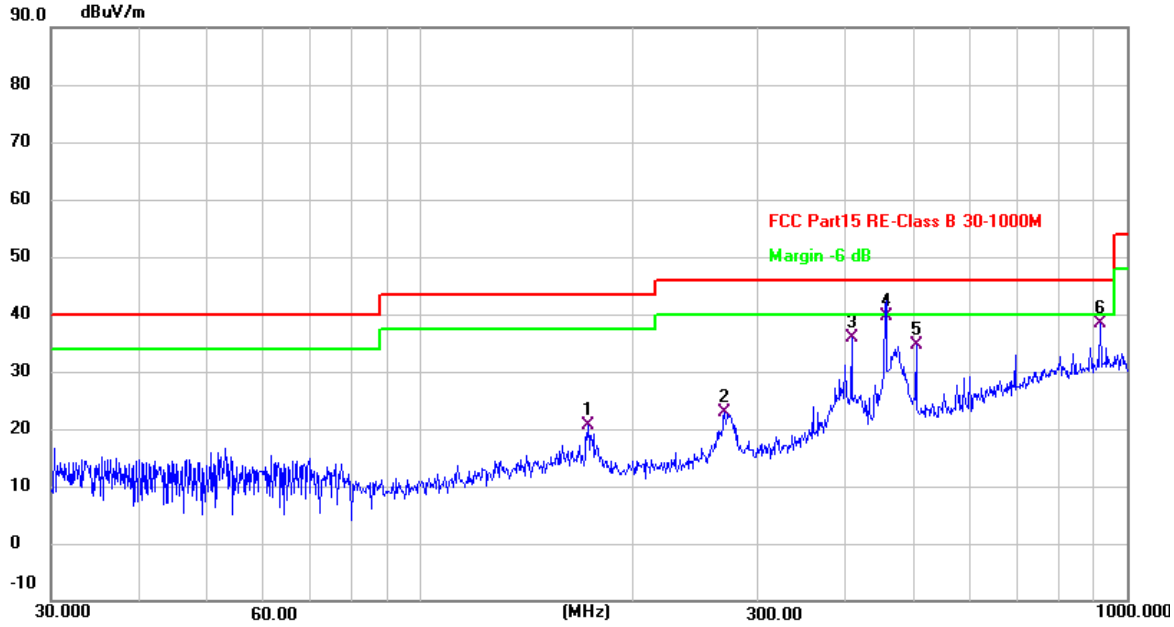

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	172.5988	37.77	-17.14	20.63	43.50	-22.87	QP
2	269.4284	39.70	-16.73	22.97	46.00	-23.03	QP
3	407.5145	48.30	-12.39	35.91	46.00	-10.09	QP
4 *	455.9058	50.53	-10.95	39.58	46.00	-6.42	QP
5	502.9395	44.67	-10.01	34.66	46.00	-11.34	QP
6	916.0687	40.39	-2.04	38.35	46.00	-7.65	QP

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Above 1GHz

Ant. No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4823.686	41.55	1.87	43.42	74.00	-30.58	peak
2 *	4824.375	26.06	1.87	27.93	54.00	-26.07	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4823.414	40.40	1.87	42.27	74.00	-31.73	peak
2 *	4824.260	26.10	1.87	27.97	54.00	-26.03	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.919	40.49	1.95	42.44	74.00	-31.56	peak
2 *	4874.467	25.90	1.95	27.85	54.00	-26.15	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.367	42.28	1.95	44.23	74.00	-29.77	peak
2 *	4874.061	25.87	1.95	27.82	54.00	-26.18	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4923.185	24.84	2.04	26.88	54.00	-27.12	AVG
2	4924.166	40.03	2.04	42.07	74.00	-31.93	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4923.227	25.10	2.04	27.14	54.00	-26.86	AVG
2	4924.579	39.94	2.04	41.98	74.00	-32.02	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11g Mode 2412MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4823.383	25.81	1.87	27.68	54.00	-26.32	AVG
2	4824.486	40.73	1.87	42.60	74.00	-31.40	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11g Mode 2412MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4823.028	25.73	1.87	27.60	54.00	-26.40	AVG
2	4824.591	40.20	1.87	42.07	74.00	-31.93	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11g Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4873.533	25.52	1.95	27.47	54.00	-26.53	AVG
2	4874.615	41.07	1.95	43.02	74.00	-30.98	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11g Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.130	40.02	1.95	41.97	74.00	-32.03	peak
2 *	4873.304	25.55	1.95	27.50	54.00	-26.50	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11g Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4923.777	24.91	2.04	26.95	54.00	-27.05	AVG
2	4924.593	39.89	2.04	41.93	74.00	-32.07	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11g Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4923.961	39.64	2.04	41.68	74.00	-32.32	peak
2 *	4924.073	25.21	2.04	27.25	54.00	-26.75	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 2412MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4823.066	40.08	1.87	41.95	74.00	-32.05	peak
2 *	4824.981	25.90	1.87	27.77	54.00	-26.23	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 2412MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4823.157	41.23	1.87	43.10	74.00	-30.90	peak
2 *	4824.655	26.02	1.87	27.89	54.00	-26.11	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.692	40.46	1.95	42.41	74.00	-31.59	peak
2 *	4873.863	25.69	1.95	27.64	54.00	-26.36	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4873.191	26.09	1.95	28.04	54.00	-25.96	AVG
2	4873.667	40.79	1.95	42.74	74.00	-31.26	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4923.352	40.71	2.04	42.75	74.00	-31.25	peak
2 *	4924.543	24.70	2.04	26.74	54.00	-27.26	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4923.164	39.95	2.04	41.99	74.00	-32.01	peak
2 *	4924.456	25.43	2.04	27.47	54.00	-26.53	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 2422MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4843.755	40.48	1.90	42.38	74.00	-31.62	peak
2 *	4843.904	25.49	1.90	27.39	54.00	-26.61	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 2422MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4844.211	25.90	1.90	27.80	54.00	-26.20	AVG
2	4844.521	40.19	1.90	42.09	74.00	-31.91	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4874.040	41.13	1.95	43.08	74.00	-30.92	peak
2 *	4874.526	25.69	1.95	27.64	54.00	-26.36	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4873.629	25.75	1.95	27.70	54.00	-26.30	AVG
2	4874.319	39.96	1.95	41.91	74.00	-32.09	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 2452MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4904.449	25.24	2.00	27.24	54.00	-26.76	AVG
2	4904.531	40.58	2.00	42.58	74.00	-31.42	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 2452MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4904.171	25.50	2.00	27.50	54.00	-26.50	AVG
2	4904.703	40.61	2.00	42.61	74.00	-31.39	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE20) Mode 2412MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4823.849	25.92	1.87	27.79	54.00	-26.21	AVG
2	4824.760	40.29	1.87	42.16	74.00	-31.84	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE20) Mode 2412MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4824.007	40.45	1.87	42.32	74.00	-31.68	peak
2 *	4824.673	25.75	1.87	27.62	54.00	-26.38	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE20) Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.424	39.67	1.95	41.62	74.00	-32.38	peak
2 *	4874.855	26.24	1.95	28.19	54.00	-25.81	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE20) Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4874.187	40.63	1.95	42.58	74.00	-31.42	peak
2 *	4874.741	25.80	1.95	27.75	54.00	-26.25	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE20) Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4924.323	39.84	2.04	41.88	74.00	-32.12	peak
2 *	4924.467	25.13	2.04	27.17	54.00	-26.83	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE20) Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4923.804	25.15	2.04	27.19	54.00	-26.81	AVG
2	4923.880	40.60	2.04	42.64	74.00	-31.36	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 2422MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4844.023	25.91	1.90	27.81	54.00	-26.19	AVG
2	4844.901	40.09	1.90	41.99	74.00	-32.01	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 2422MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4843.287	25.73	1.90	27.63	54.00	-26.37	AVG
2	4844.331	39.90	1.90	41.80	74.00	-32.20	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.529	40.55	1.95	42.50	74.00	-31.50	peak
2 *	4874.807	25.85	1.95	27.80	54.00	-26.20	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4874.030	25.86	1.95	27.81	54.00	-26.19	AVG
2	4874.804	40.42	1.95	42.37	74.00	-31.63	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 2452MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4903.751	39.81	2.00	41.81	74.00	-32.19	peak
2 *	4904.862	25.45	2.00	27.45	54.00	-26.55	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 2452MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4903.250	25.45	2.00	27.45	54.00	-26.55	AVG
2	4903.875	39.64	2.00	41.64	74.00	-32.36	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

3.3. Band Edge Emissions (Radiated)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d)

Restricted Frequency Band (MHz)	(dBμV/m) (at 3m)	
	Peak	Average
2310 ~ 2390	74	54
2483.5 ~ 2500	74	54

Test Configuration

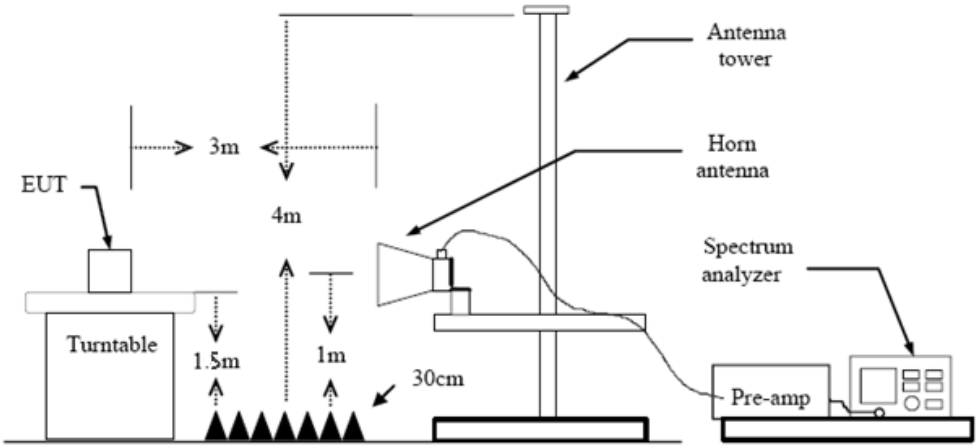

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.

Test Mode

Please refer to the clause 2.4.

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Test Result

Ant. No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2412MHz

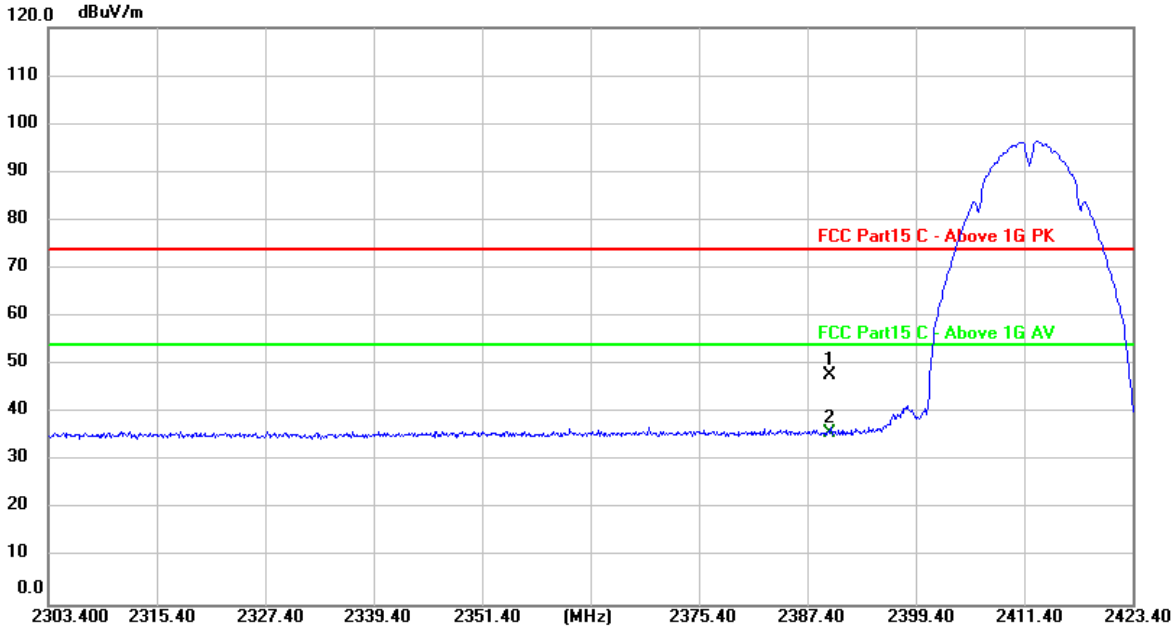

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	16.46	31.31	47.77	74.00	-26.23	peak
2 *	2390.000	4.46	31.31	35.77	54.00	-18.23	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2412MHz

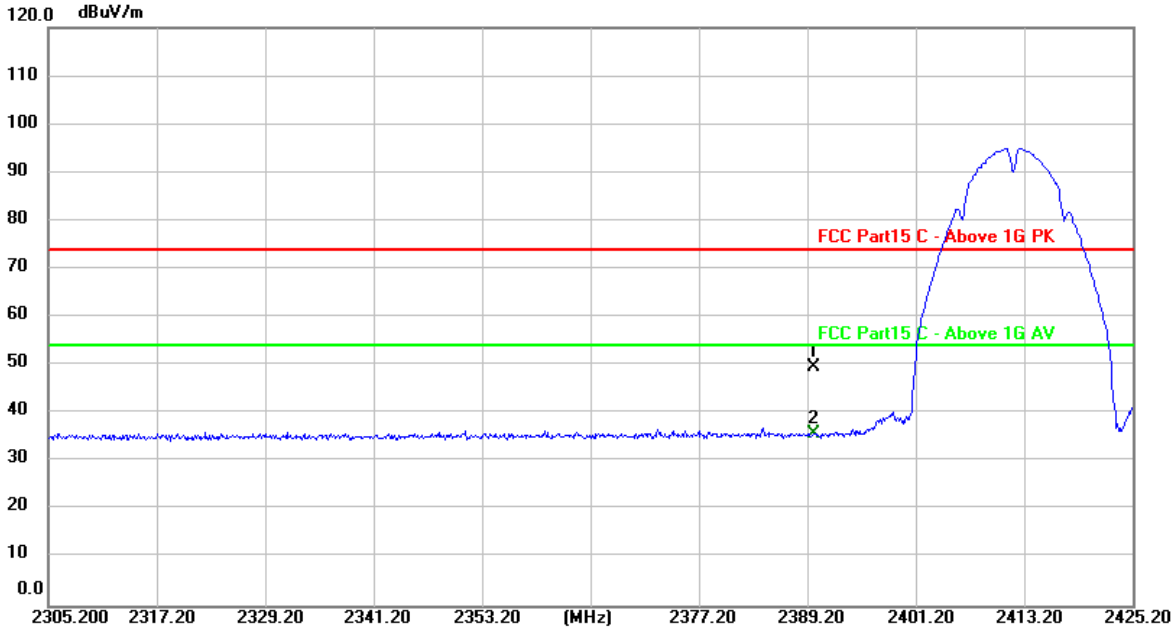

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	18.28	31.31	49.59	74.00	-24.41	peak
2 *	2390.000	4.64	31.31	35.95	54.00	-18.05	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2462MHz

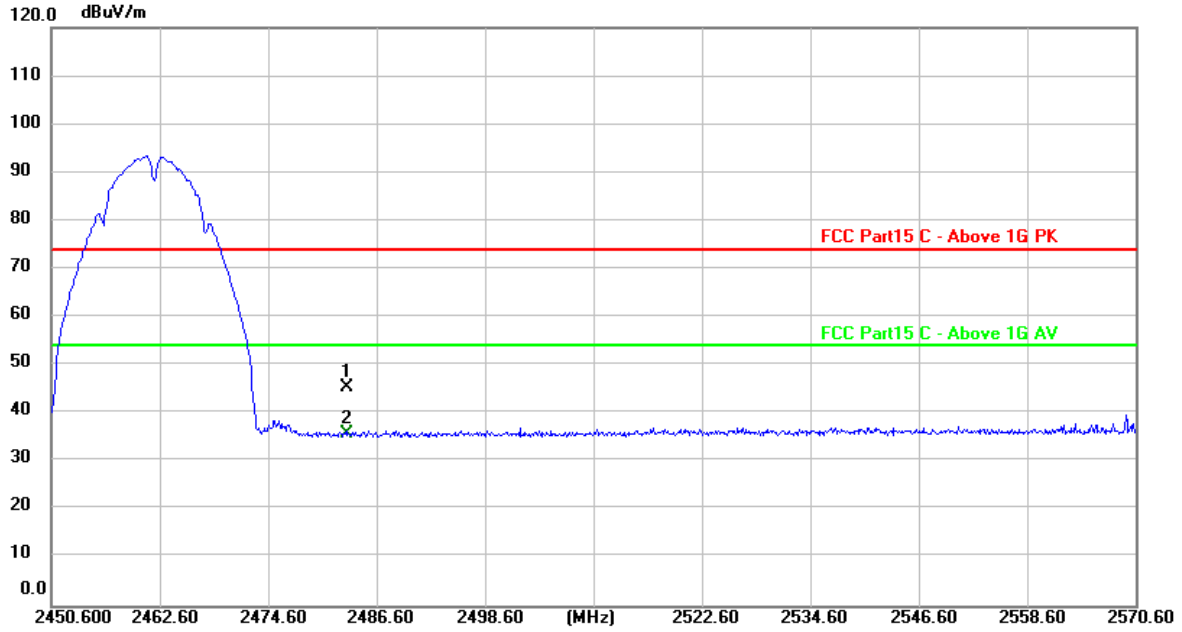

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	13.95	31.50	45.45	74.00	-28.55	peak
2 *	2483.500	4.44	31.50	35.94	54.00	-18.06	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2462MHz

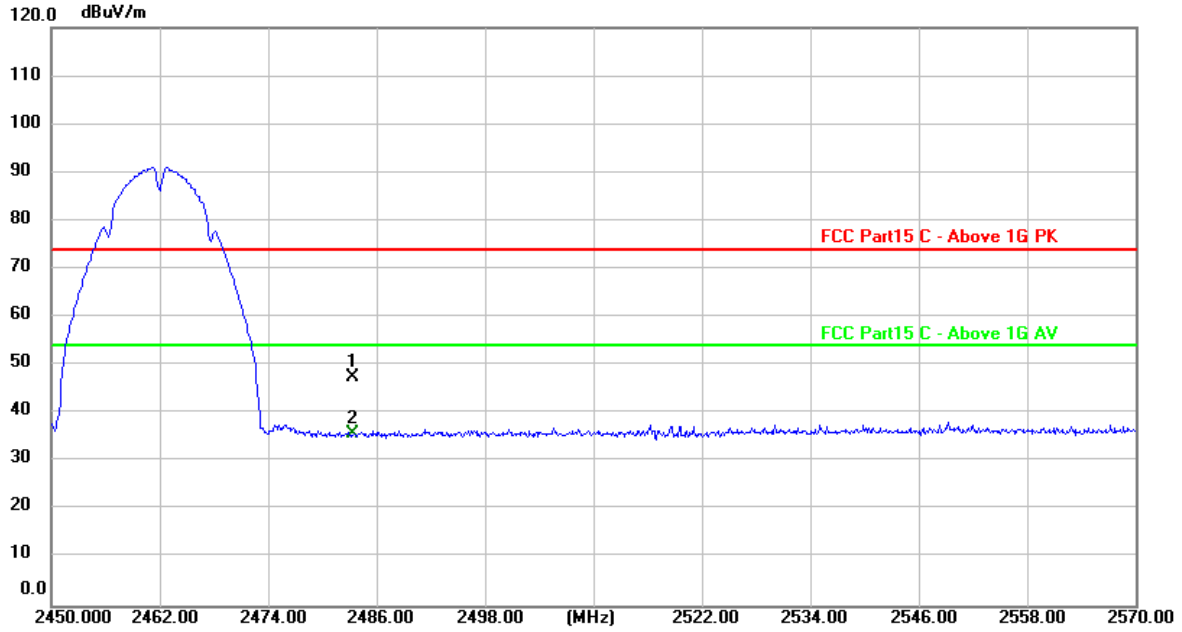

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	15.92	31.50	47.42	74.00	-26.58	peak
2 *	2483.500	4.34	31.50	35.84	54.00	-18.16	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11g Mode 2412MHz

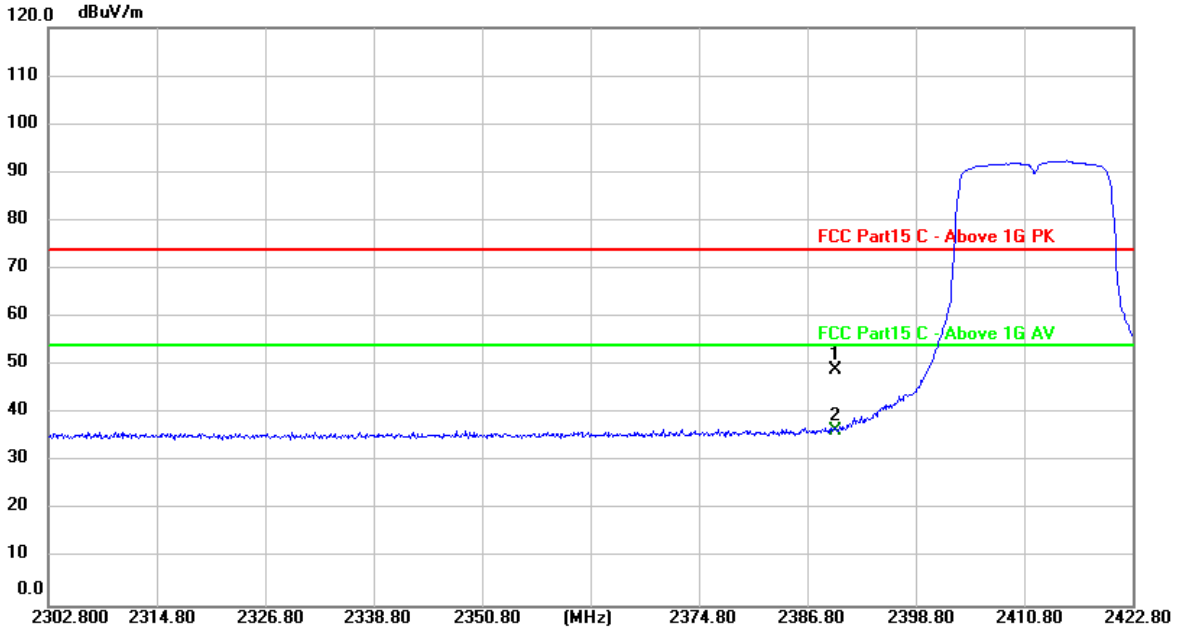

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	17.85	31.31	49.16	74.00	-24.84	peak
2 *	2390.000	5.19	31.31	36.50	54.00	-17.50	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11g Mode 2412MHz

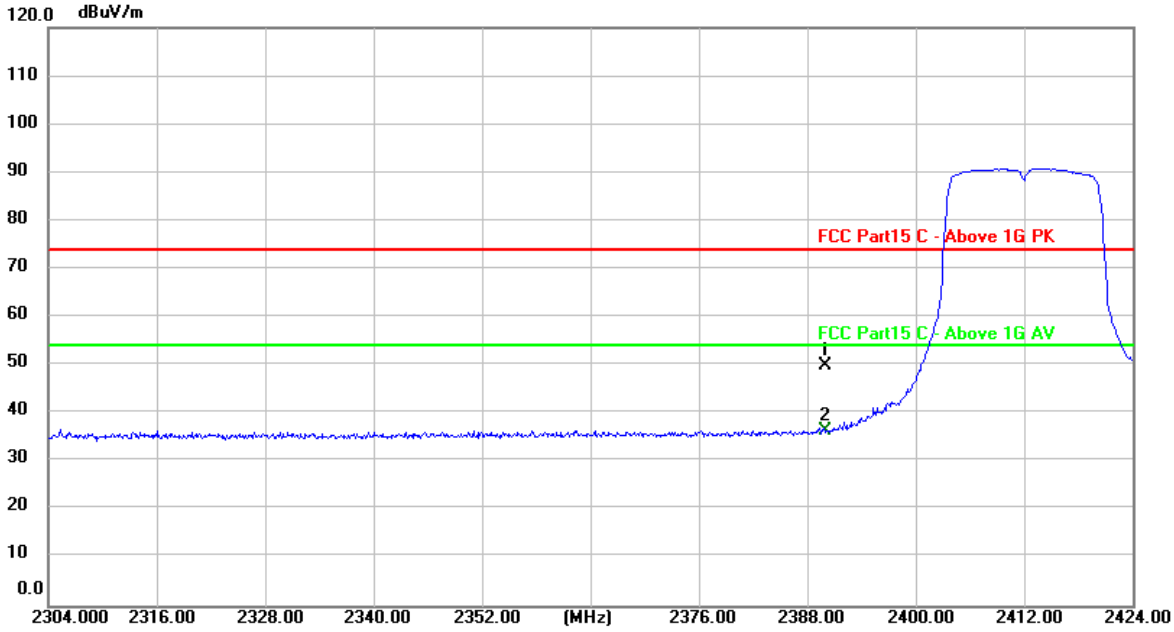

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	18.52	31.31	49.83	74.00	-24.17	peak
2 *	2390.000	5.28	31.31	36.59	54.00	-17.41	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11g Mode 2462MHz

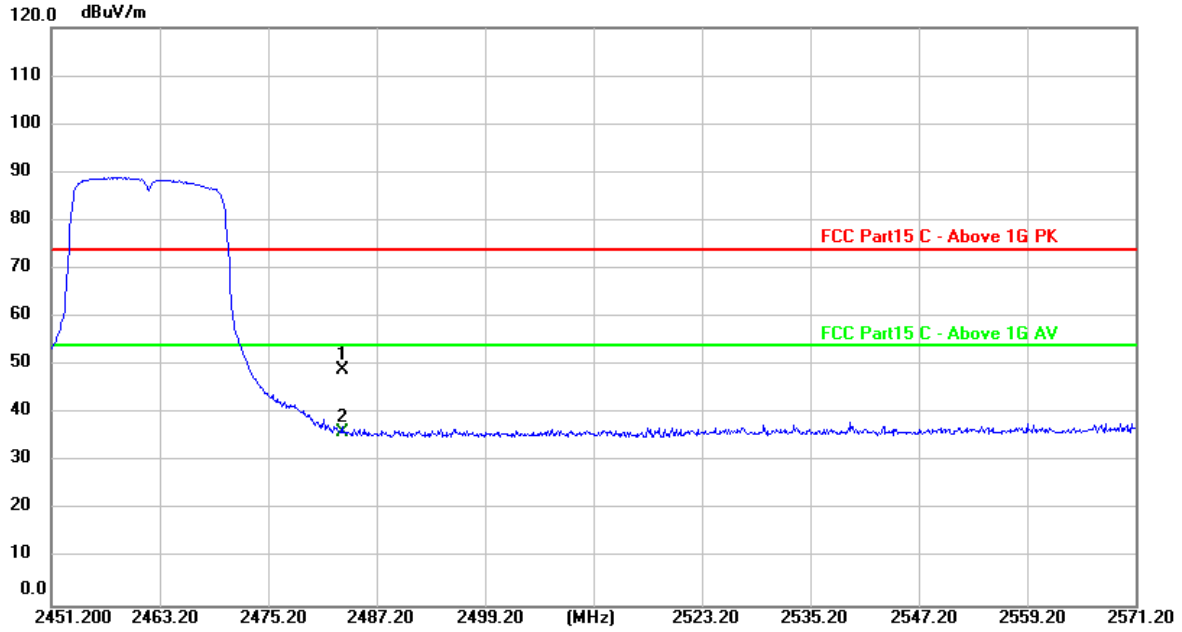

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	17.47	31.50	48.97	74.00	-25.03	peak
2 *	2483.500	4.59	31.50	36.09	54.00	-17.91	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11g Mode 2462MHz

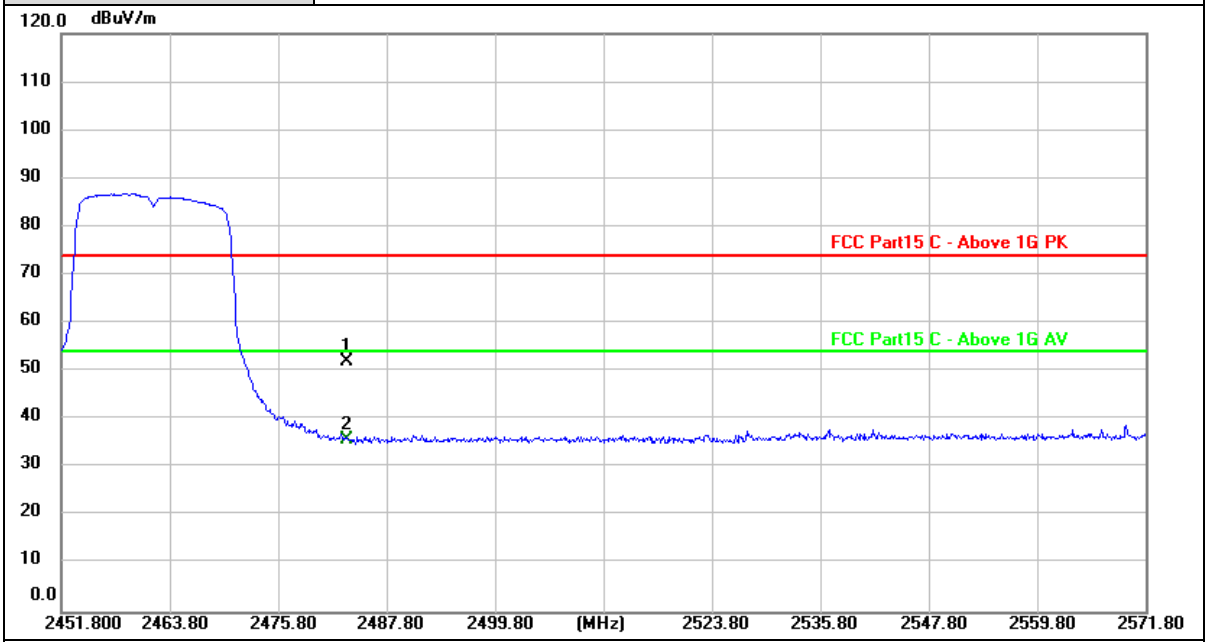

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	20.53	31.50	52.03	74.00	-21.97	peak
2 *	2483.500	4.35	31.50	35.85	54.00	-18.15	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 2412MHz

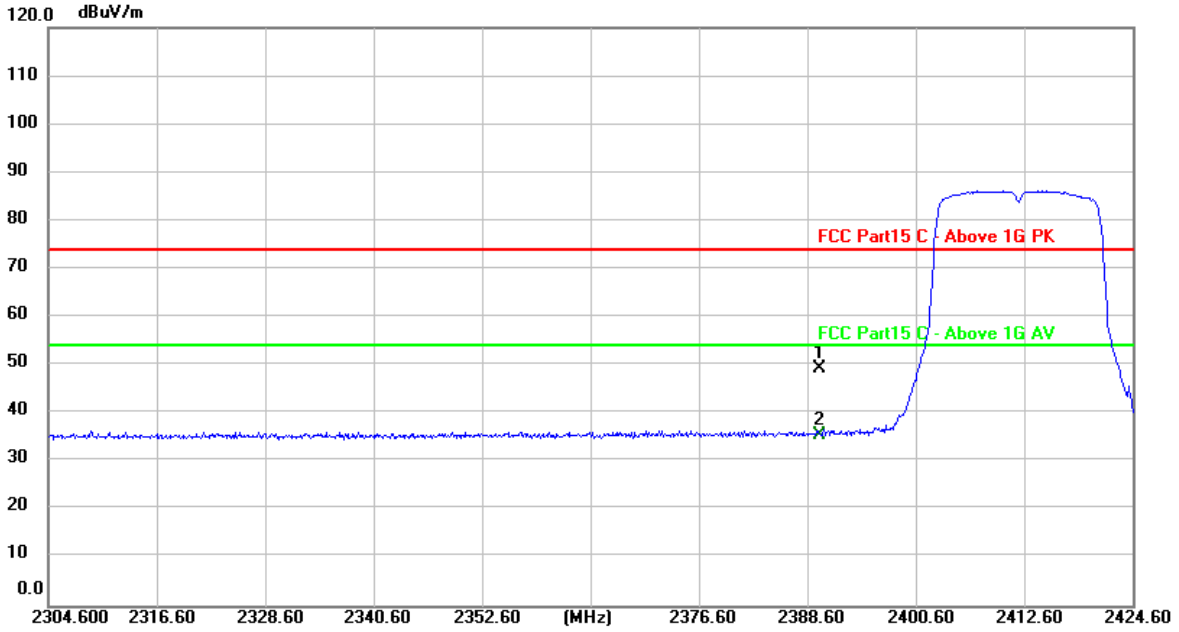

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	18.00	31.31	49.31	74.00	-24.69	peak
2 *	2390.000	4.29	31.31	35.60	54.00	-18.40	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 2412MHz

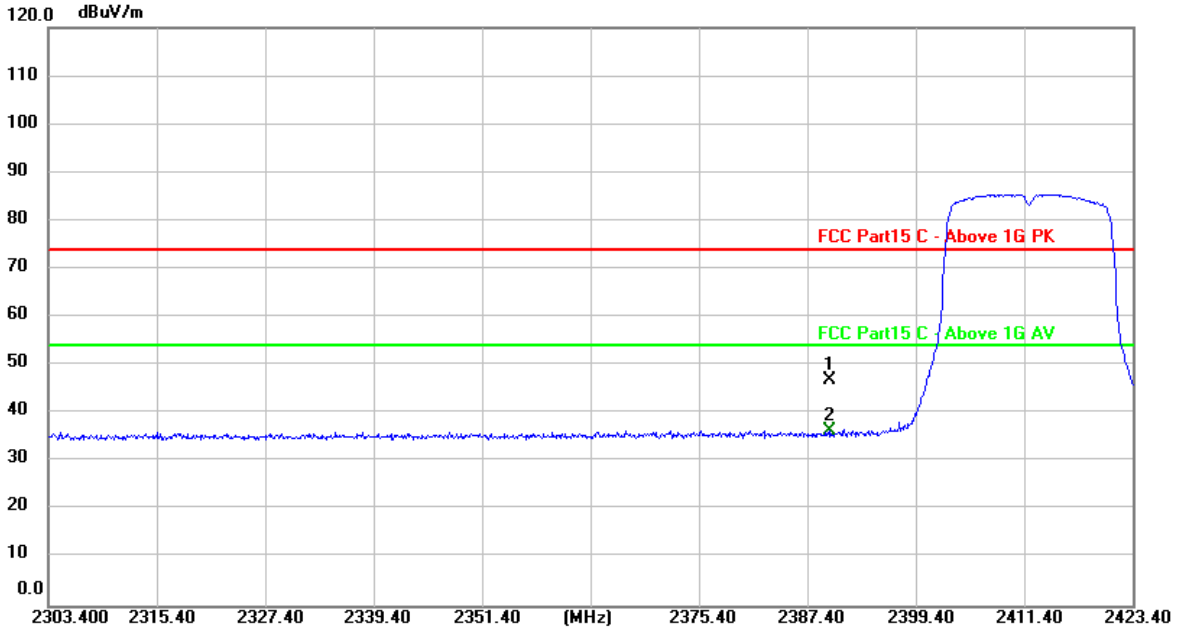

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	15.69	31.31	47.00	74.00	-27.00	peak
2 *	2390.000	5.07	31.31	36.38	54.00	-17.62	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 2462MHz

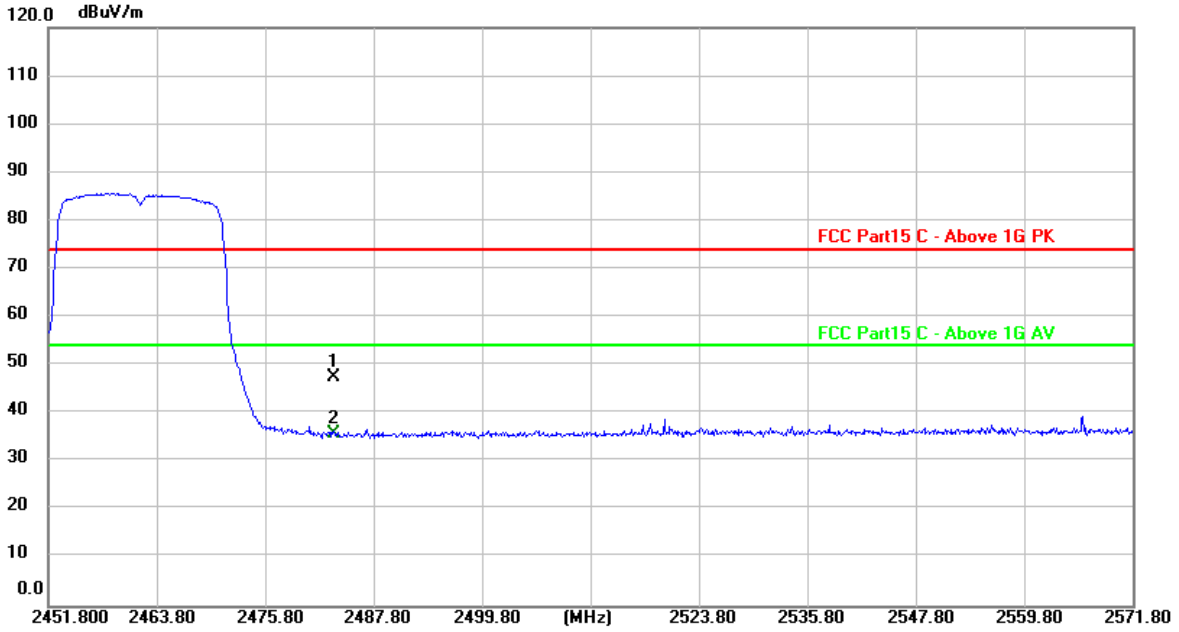

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	15.95	31.50	47.45	74.00	-26.55	peak
2 *	2483.500	4.25	31.50	35.75	54.00	-18.25	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 2462MHz

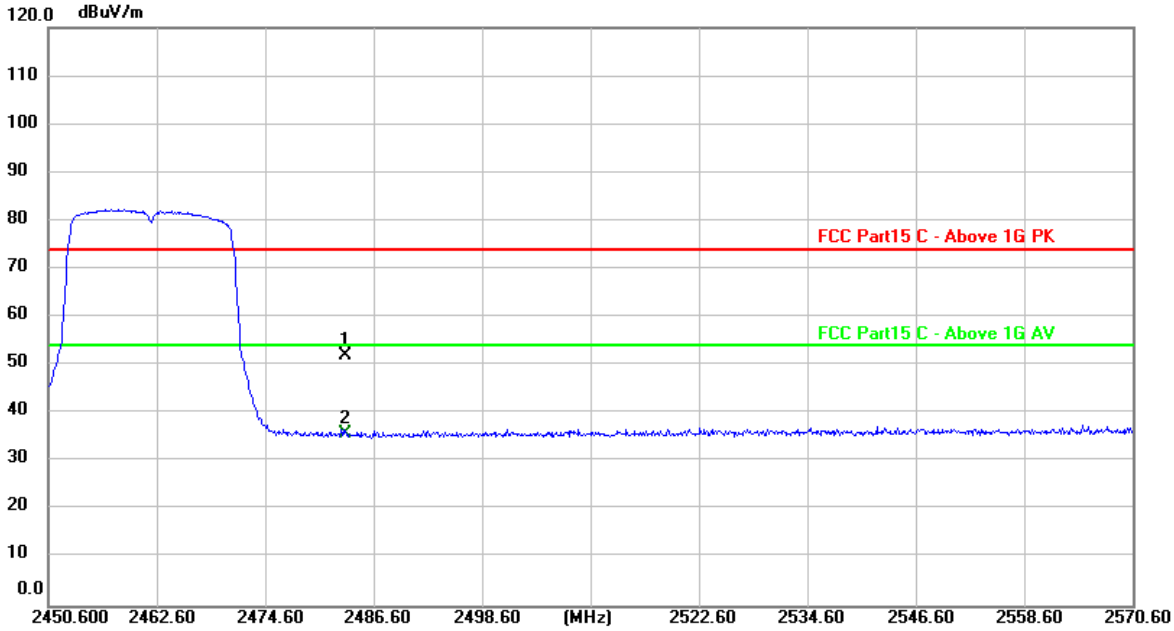

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	20.53	31.50	52.03	74.00	-21.97	peak
2 *	2483.500	4.45	31.50	35.95	54.00	-18.05	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 2422MHz

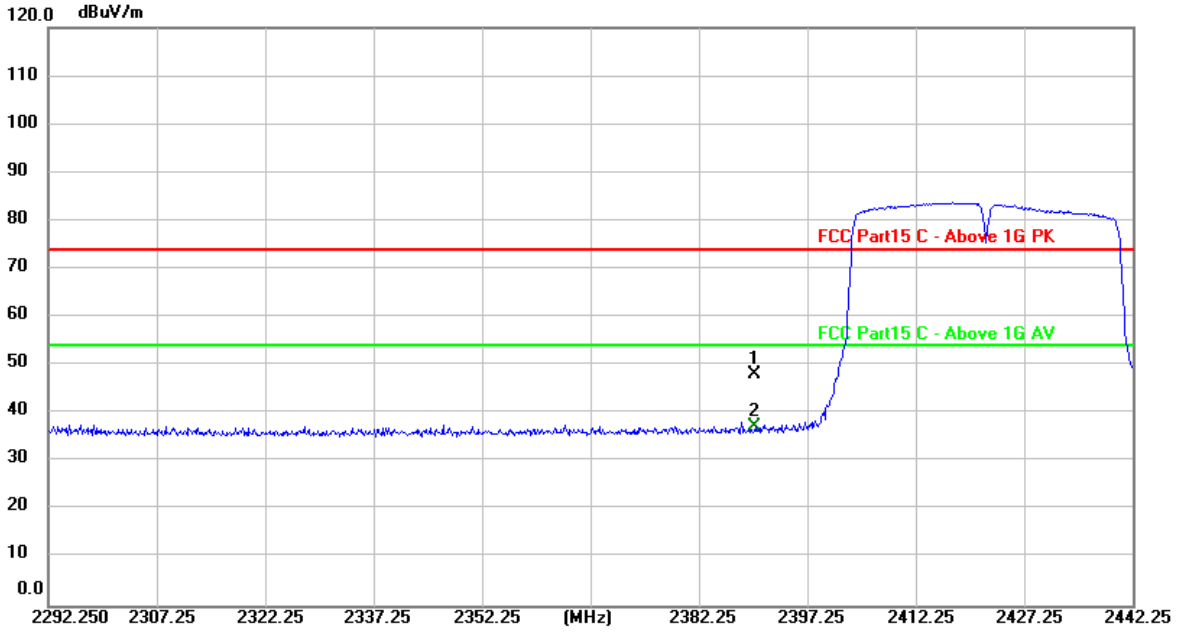

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	16.86	31.31	48.17	74.00	-25.83	peak
2 *	2390.000	6.04	31.31	37.35	54.00	-16.65	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 2422MHz

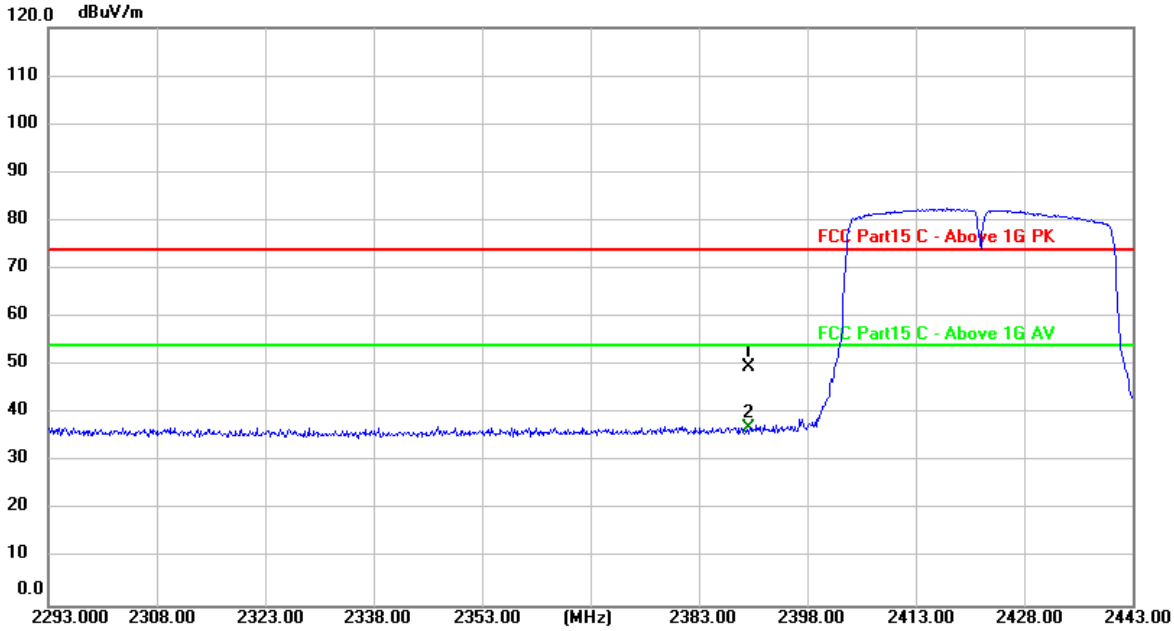

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	18.46	31.31	49.77	74.00	-24.23	peak
2 *	2390.000	5.82	31.31	37.13	54.00	-16.87	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 2452MHz

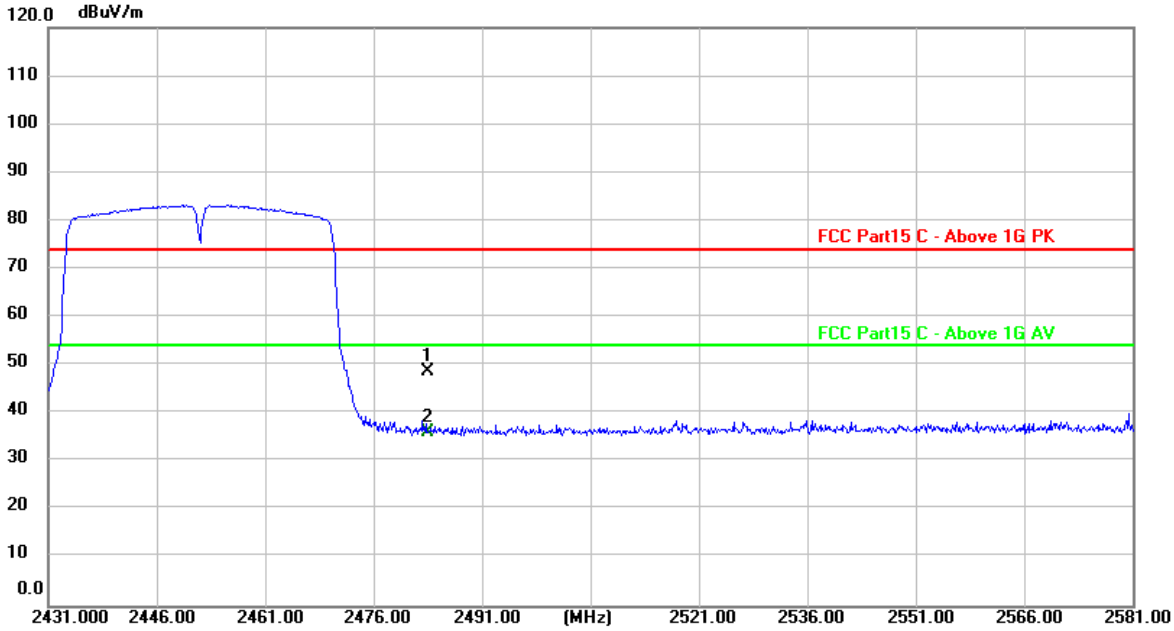

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	17.35	31.50	48.85	74.00	-25.15	peak
2 *	2483.500	4.60	31.50	36.10	54.00	-17.90	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 2452MHz

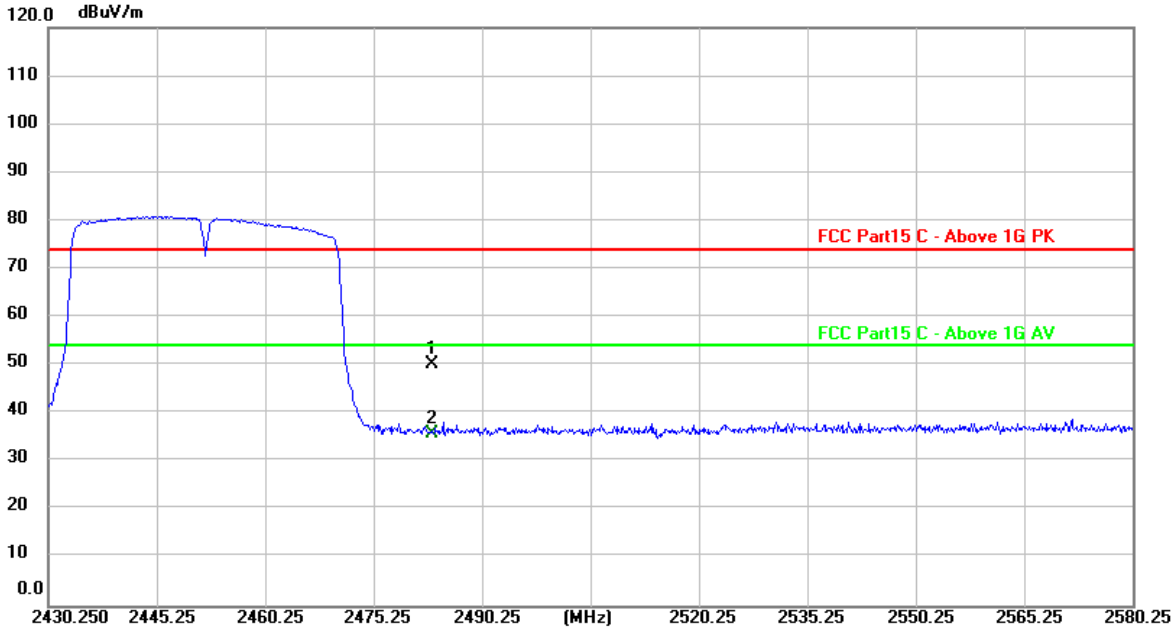

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	18.78	31.50	50.28	74.00	-23.72	peak
2 *	2483.500	4.47	31.50	35.97	54.00	-18.03	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE20) Mode 2412MHz

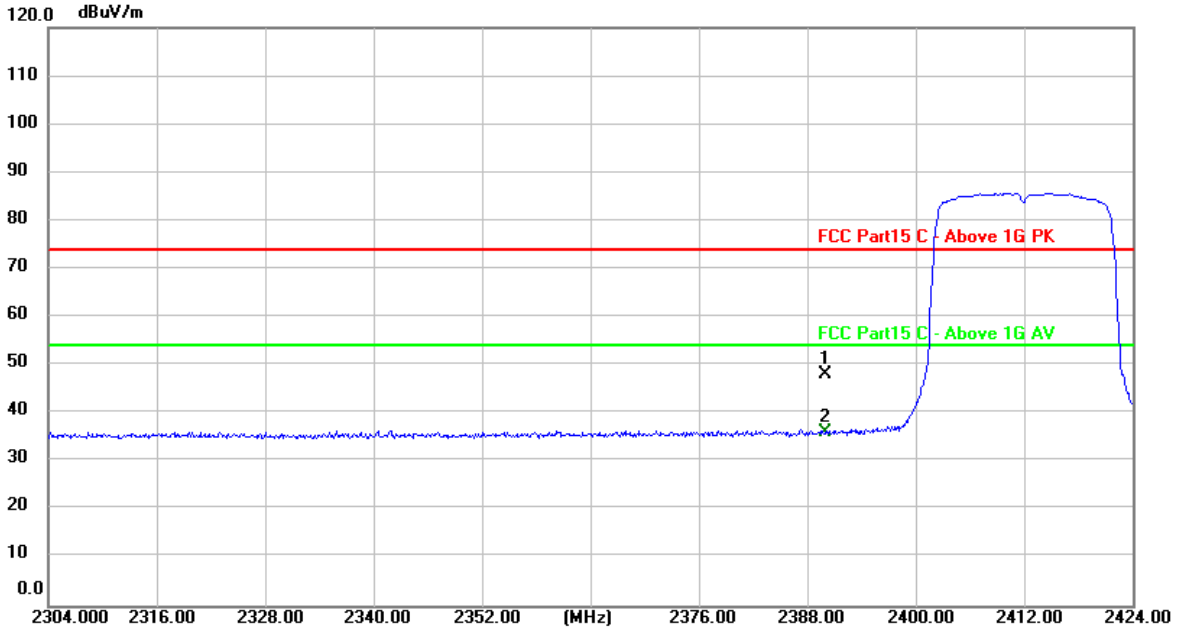

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	16.85	31.31	48.16	74.00	-25.84	peak
2 *	2390.000	4.74	31.31	36.05	54.00	-17.95	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE20) Mode 2412MHz

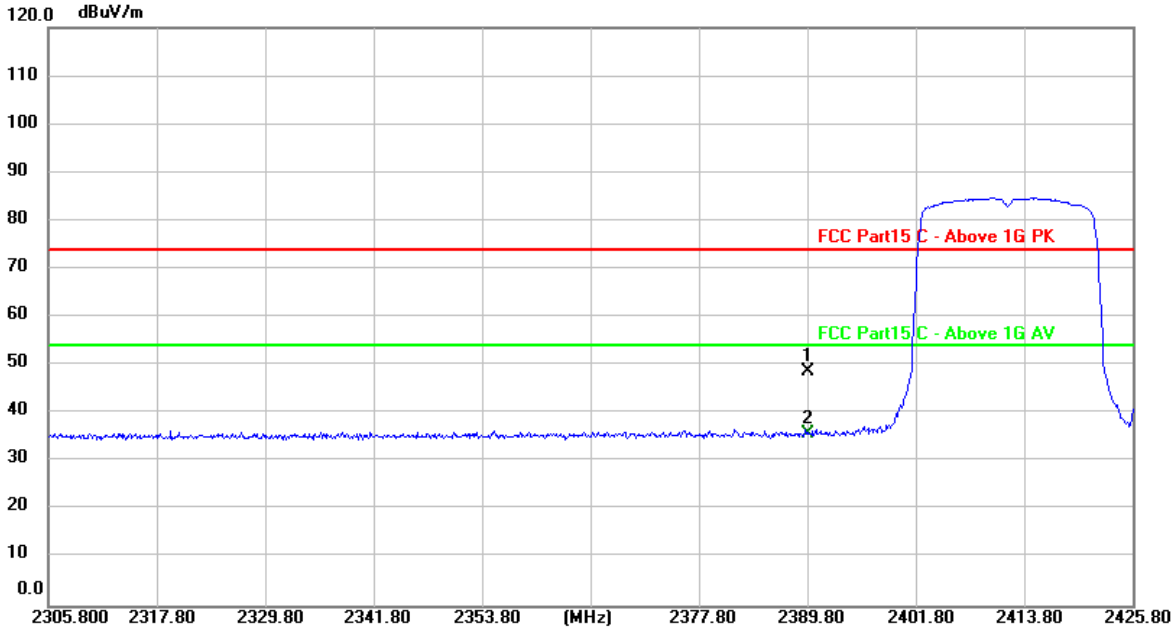

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	17.40	31.31	48.71	74.00	-25.29	peak
2 *	2390.000	4.42	31.31	35.73	54.00	-18.27	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE20) Mode 2462MHz

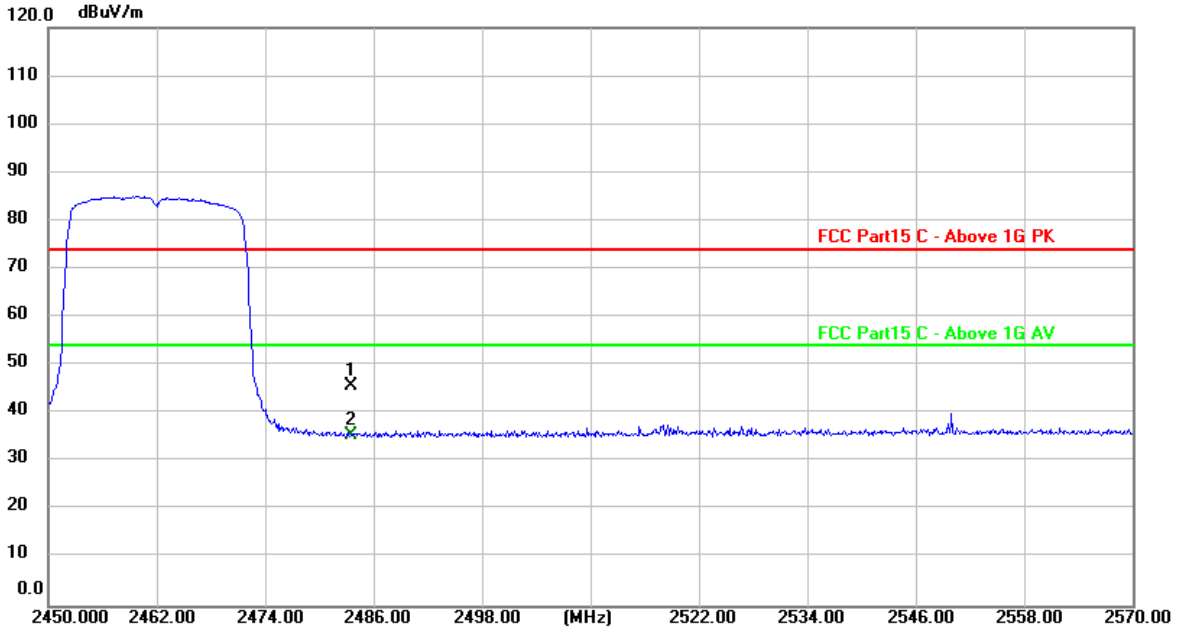

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	14.38	31.50	45.88	74.00	-28.12	peak
2 *	2483.500	3.91	31.50	35.41	54.00	-18.59	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE20) Mode 2462MHz

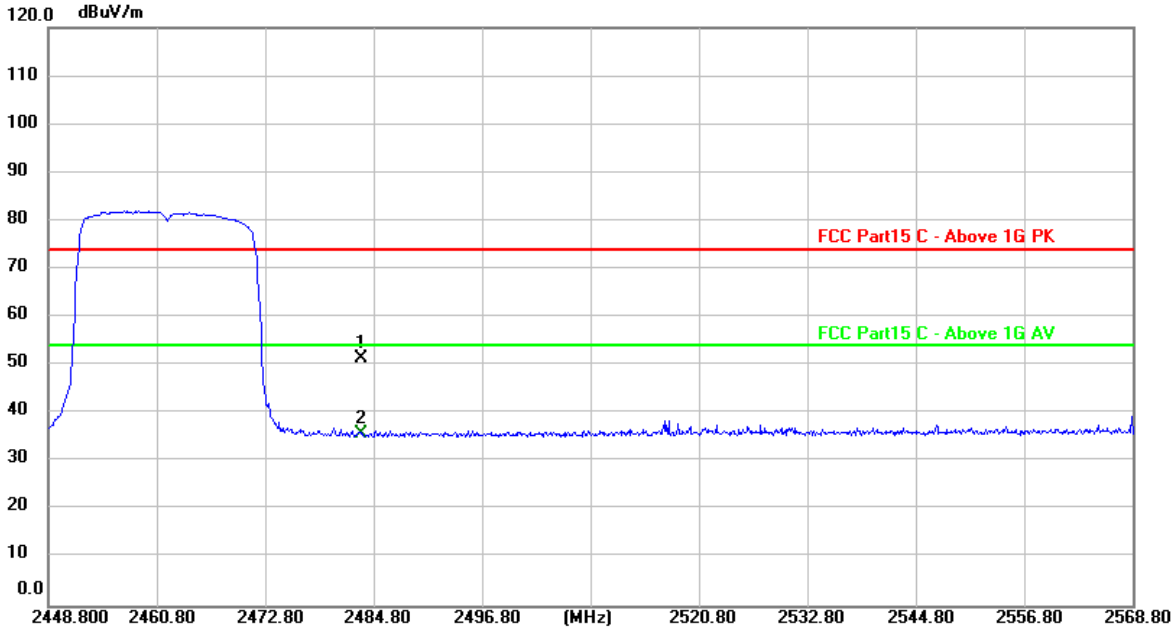

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	20.01	31.50	51.51	74.00	-22.49	peak
2 *	2483.500	4.38	31.50	35.88	54.00	-18.12	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 2422MHz

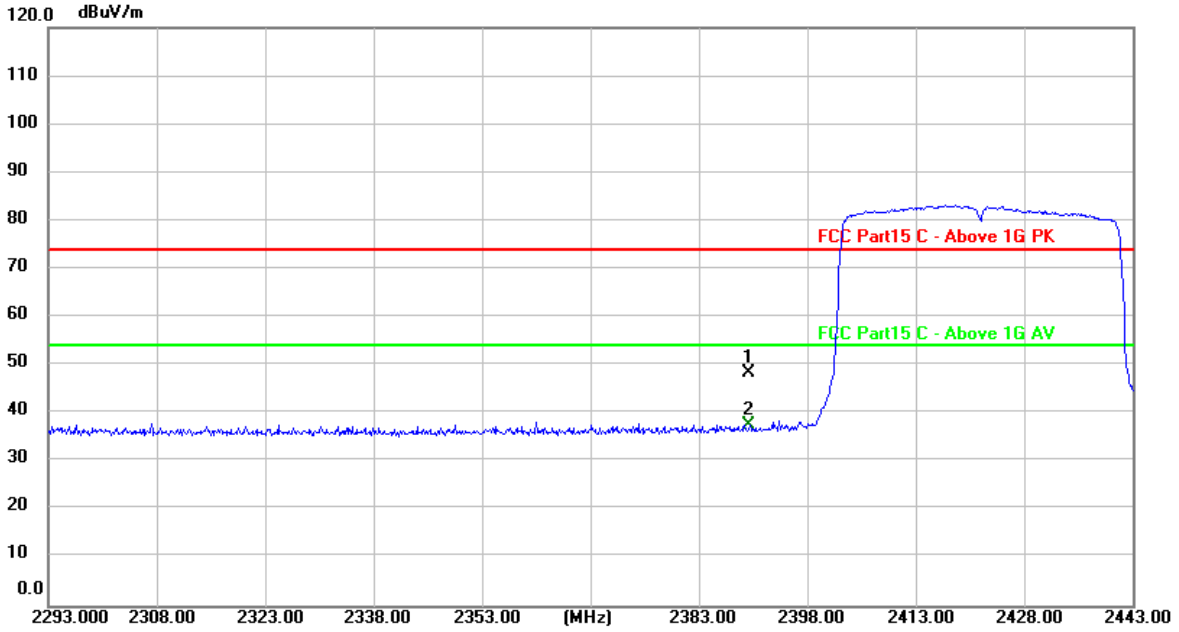

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	17.17	31.31	48.48	74.00	-25.52	peak
2 *	2390.000	6.22	31.31	37.53	54.00	-16.47	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 2422MHz

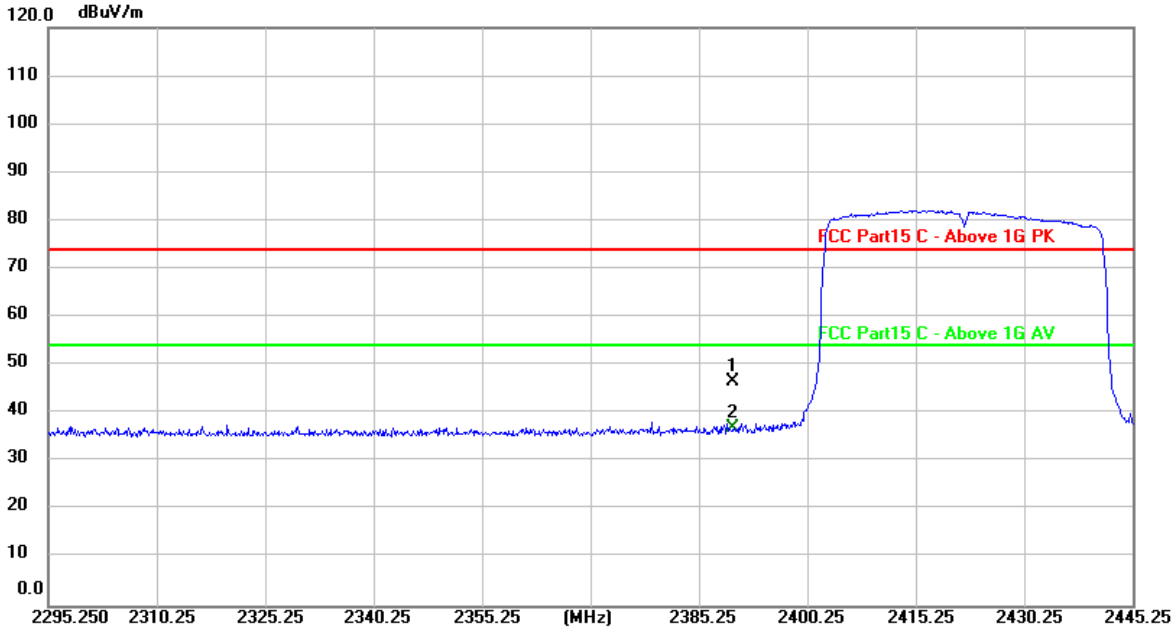

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	15.21	31.31	46.52	74.00	-27.48	peak
2 *	2390.000	5.75	31.31	37.06	54.00	-16.94	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 2452MHz

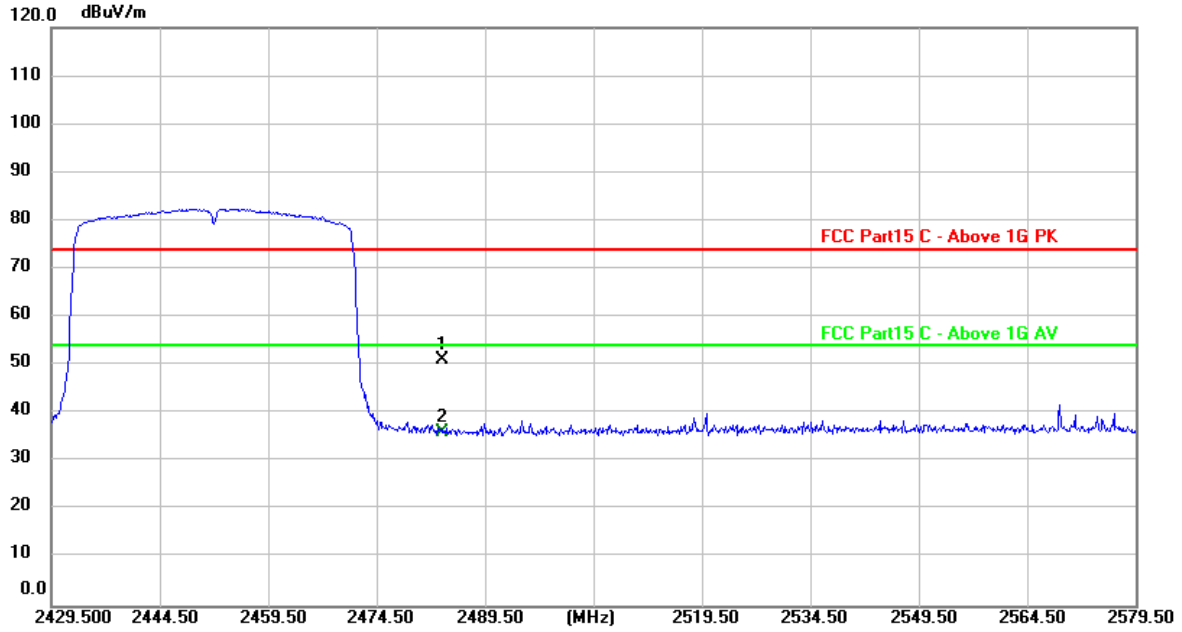

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	19.68	31.50	51.18	74.00	-22.82	peak
2 *	2483.500	4.54	31.50	36.04	54.00	-17.96	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 2452MHz

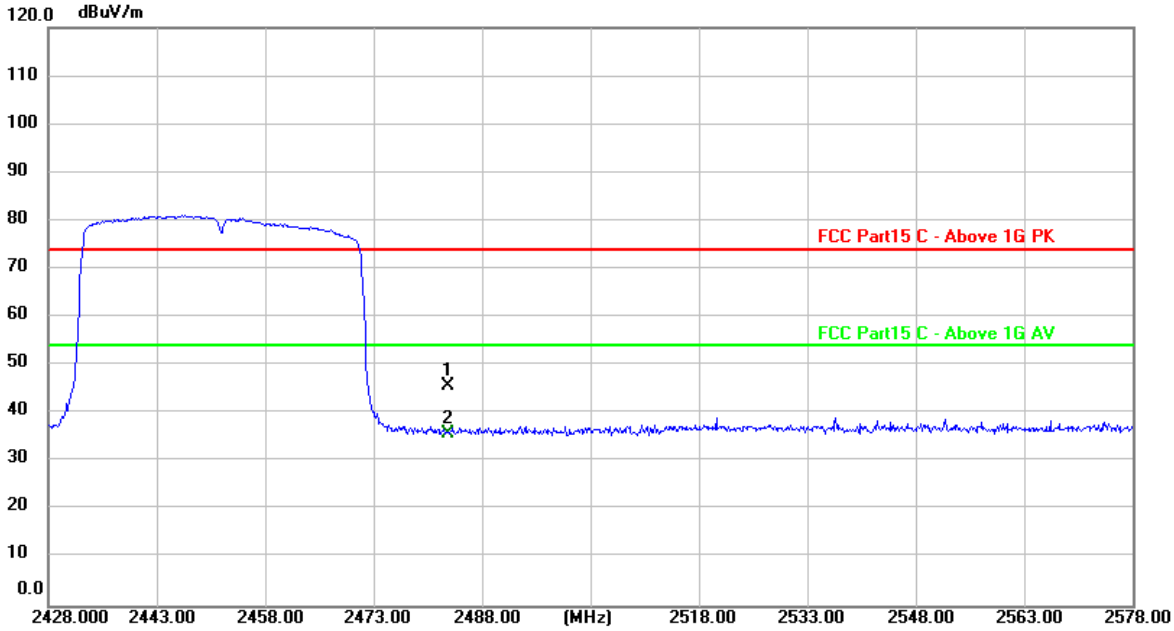

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	14.37	31.50	45.87	74.00	-28.13	peak
2 *	2483.500	4.43	31.50	35.93	54.00	-18.07	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

3.4. Band Edge and Spurious Emissions (Conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d)
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Configuration

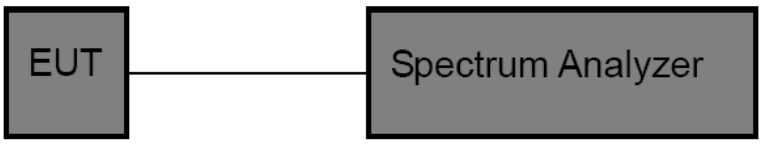

Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
   RBW = 100 kHz, VBW ≥ RBW, scan up through 10th harmonic.
   Sweep = auto, Detector function = peak, Trace = max hold.
4. Measure and record the results in the test report.

Test Mode

Please refer to the clause 2.4.

Test Result

(1) Band Edge Conducted Test

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	3.21	-45.76	≤-26.79	PASS
	Ant2	Low	2412	3.37	-46.12	≤-26.63	PASS
	Ant1	High	2462	3.19	-47.01	≤-26.81	PASS
	Ant2	High	2462	2.77	-45.79	≤-27.23	PASS
11G	Ant1	Low	2412	-2.16	-38.56	≤-32.16	PASS
	Ant2	Low	2412	0.86	-41.06	≤-29.14	PASS
	Ant1	High	2462	-0.14	-46.02	≤-30.14	PASS
	Ant2	High	2462	0.61	-46.24	≤-29.39	PASS
11N20MIMO	Ant1	Low	2412	-7.06	-44.69	≤-37.06	PASS
	Ant2	Low	2412	-6.82	-44.26	≤-36.82	PASS
	Ant1	High	2462	-6.97	-46.68	≤-36.97	PASS
	Ant2	High	2462	-6.82	-46.41	≤-36.82	PASS
11N40MIMO	Ant1	Low	2422	-7.25	-46.14	≤-37.25	PASS
	Ant2	Low	2422	-8.49	-46.85	≤-38.49	PASS
	Ant1	High	2452	-8.26	-45.61	≤-38.26	PASS
	Ant2	High	2452	-9.21	-47	≤-39.21	PASS
11AX20MIMO	Ant1	Low	2412	-3.58	-45.21	≤-33.58	PASS
	Ant2	Low	2412	-5.38	-45.99	≤-35.38	PASS
	Ant1	High	2462	-4.01	-46.69	≤-34.01	PASS
	Ant2	High	2462	-5.69	-47	≤-35.69	PASS
11AX40MIMO	Ant1	Low	2422	-8.62	-47.4	≤-38.62	PASS
	Ant2	Low	2422	-10.38	-46.45	≤-40.38	PASS
	Ant1	High	2452	-6.81	-46.99	≤-36.81	PASS
	Ant2	High	2452	-10.36	-47	≤-40.36	PASS

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

(2) Conducted Spurious Emissions Test

TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	2.94	2.94	---	PASS
			30~1000	2.94	-47.9	≤-27.06	PASS
			1000~26500	2.94	-43.97	≤-27.06	PASS
	Ant2	2412	Reference	3.88	3.88	---	PASS
			30~1000	3.88	-48.25	≤-26.12	PASS
			1000~26500	3.88	-44.71	≤-26.12	PASS
	Ant1	2437	Reference	2.33	2.33	---	PASS
			30~1000	2.33	-48.03	≤-27.67	PASS
			1000~26500	2.33	-44.44	≤-27.67	PASS
	Ant2	2437	Reference	3.29	3.29	---	PASS
			30~1000	3.29	-47.11	≤-26.71	PASS
			1000~26500	3.29	-44.88	≤-26.71	PASS
	Ant1	2462	Reference	3.46	3.46	---	PASS
			30~1000	3.46	-47.82	≤-26.54	PASS
			1000~26500	3.46	-45.28	≤-26.54	PASS
	Ant2	2462	Reference	2.88	2.88	---	PASS
			30~1000	2.88	-48.31	≤-27.12	PASS
			1000~26500	2.88	-45.93	≤-27.12	PASS
11G	Ant1	2412	Reference	0.68	0.68	---	PASS
			30~1000	0.68	-47.87	≤-29.32	PASS
			1000~26500	0.68	-45.76	≤-29.32	PASS
	Ant2	2412	Reference	1.43	1.43	---	PASS
			30~1000	1.43	-47.54	≤-28.57	PASS
			1000~26500	1.43	-45.4	≤-28.57	PASS
	Ant1	2437	Reference	0.50	0.50	---	PASS
			30~1000	0.50	-48	≤-29.5	PASS
			1000~26500	0.50	-46.39	≤-29.5	PASS
	Ant2	2437	Reference	-0.62	-0.62	---	PASS
			30~1000	-0.62	-47.2	≤-30.62	PASS
			1000~26500	-0.62	-45.73	≤-30.62	PASS
	Ant1	2462	Reference	-2.15	-2.15	---	PASS
			30~1000	-2.15	-47.17	≤-32.15	PASS
			1000~26500	-2.15	-45.46	≤-32.15	PASS
	Ant2	2462	Reference	0.70	0.70	---	PASS
			30~1000	0.70	-47.67	≤-29.3	PASS
			1000~26500	0.70	-45.75	≤-29.3	PASS
11N20MIMO	Ant1	2412	Reference	-3.64	-3.64	---	PASS
			30~1000	-3.64	-48	≤-33.64	PASS
			1000~26500	-3.64	-50.88	≤-33.64	PASS
	Ant2	2412	Reference	-4.51	-4.51	---	PASS
			30~1000	-4.51	-47.64	≤-34.51	PASS
			1000~26500	-4.51	-50.49	≤-34.51	PASS
	Ant1	2437	Reference	-4.84	-4.84	---	PASS
			30~1000	-4.84	-47.9	≤-34.84	PASS
			1000~26500	-4.84	-50.45	≤-34.84	PASS
	Ant2	2437	Reference	-6.72	-6.72	---	PASS
			30~1000	-6.72	-47.65	≤-36.72	PASS
			1000~26500	-6.72	-50.94	≤-36.72	PASS
	Ant1	2462	Reference	-4.80	-4.80	---	PASS
			30~1000	-4.80	-48.02	≤-34.8	PASS
			1000~26500	-4.80	-51.27	≤-34.8	PASS
	Ant2	2462	Reference	-5.47	-5.47	---	PASS
			30~1000	-5.47	-47.64	≤-35.47	PASS
			1000~26500	-5.47	-49.19	≤-35.47	PASS
11N40MIMO	Ant1	2422	Reference	-7.91	-7.91	---	PASS
			30~1000	-7.91	-48.56	≤-37.91	PASS
			1000~26500	-7.91	-47.89	≤-37.91	PASS
	Ant2	2422	Reference	-8.94	-8.94	---	PASS
			30~1000	-8.94	-48.14	≤-38.94	PASS

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

			1000~26500	-8.94	-49.54	≤-38.94	PASS
	Ant1	2437	Reference	-9.43	-9.43	---	PASS
			30~1000	-9.43	-48.63	≤-39.43	PASS
			1000~26500	-9.43	-49.49	≤-39.43	PASS
	Ant2	2437	Reference	-7.34	-7.34	---	PASS
			30~1000	-7.34	-48.04	≤-37.34	PASS
			1000~26500	-7.34	-50.79	≤-37.34	PASS
	Ant1	2452	Reference	-7.89	-7.89	---	PASS
			30~1000	-7.89	-48.24	≤-37.89	PASS
			1000~26500	-7.89	-49.56	≤-37.89	PASS
	Ant2	2452	Reference	-7.95	-7.95	---	PASS
			30~1000	-7.95	-48.19	≤-37.95	PASS
			1000~26500	-7.95	-49.71	≤-37.95	PASS
11AX20MIMO	Ant1	2412	Reference	-5.31	-5.31	---	PASS
			30~1000	-5.31	-47.44	≤-35.31	PASS
			1000~26500	-5.31	-49.97	≤-35.31	PASS
	Ant2	2412	Reference	-7.61	-7.61	---	PASS
			30~1000	-7.61	-47.07	≤-37.61	PASS
			1000~26500	-7.61	-50.95	≤-37.61	PASS
	Ant1	2437	Reference	-3.90	-3.90	---	PASS
			30~1000	-3.90	-47.33	≤-33.9	PASS
			1000~26500	-3.90	-50.16	≤-33.9	PASS
	Ant2	2437	Reference	-4.13	-4.13	---	PASS
			30~1000	-4.13	-48.16	≤-34.13	PASS
			1000~26500	-4.13	-50.73	≤-34.13	PASS
	Ant1	2462	Reference	-4.57	-4.57	---	PASS
			30~1000	-4.57	-48.16	≤-34.57	PASS
			1000~26500	-4.57	-50.36	≤-34.57	PASS
	Ant2	2462	Reference	-6.55	-6.55	---	PASS
			30~1000	-6.55	-46.77	≤-36.55	PASS
			1000~26500	-6.55	-51.2	≤-36.55	PASS
11AX40MIMO	Ant1	2422	Reference	-8.34	-8.34	---	PASS
			30~1000	-8.34	-47.64	≤-38.34	PASS
			1000~26500	-8.34	-48.93	≤-38.34	PASS
	Ant2	2422	Reference	-8.49	-8.49	---	PASS
			30~1000	-8.49	-47.63	≤-38.49	PASS
			1000~26500	-8.49	-50.16	≤-38.49	PASS
	Ant1	2437	Reference	-8.31	-8.31	---	PASS
			30~1000	-8.31	-48.26	≤-38.31	PASS
			1000~26500	-8.31	-47.15	≤-38.31	PASS
	Ant2	2437	Reference	-7.55	-7.55	---	PASS
			30~1000	-7.55	-47.8	≤-37.55	PASS
			1000~26500	-7.55	-48.75	≤-37.55	PASS
	Ant1	2452	Reference	-6.76	-6.76	---	PASS
			30~1000	-6.76	-48.1	≤-36.76	PASS
			1000~26500	-6.76	-48.62	≤-36.76	PASS
	Ant2	2452	Reference	-9.96	-9.96	---	PASS
			30~1000	-9.96	-47.99	≤-39.96	PASS
			1000~26500	-9.96	-49.39	≤-39.96	PASS

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Band Edge Conducted Test plot as follows:

11B_Ant1_Low_2412

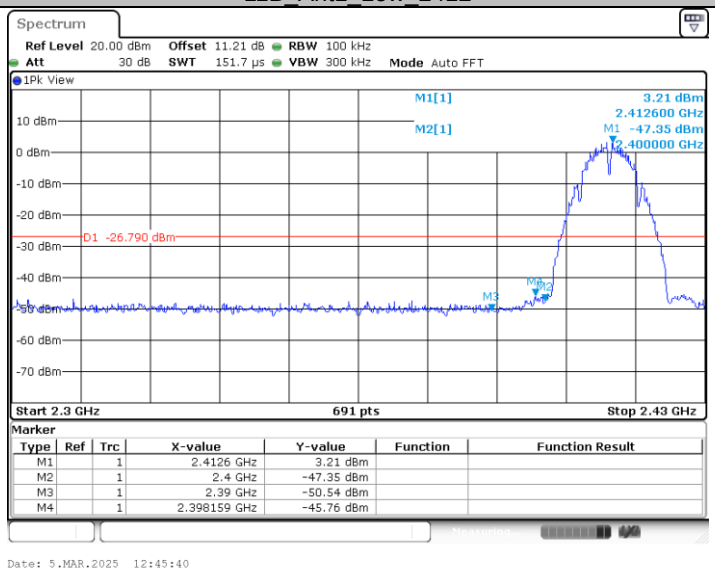

11B_Ant2_Low_2412

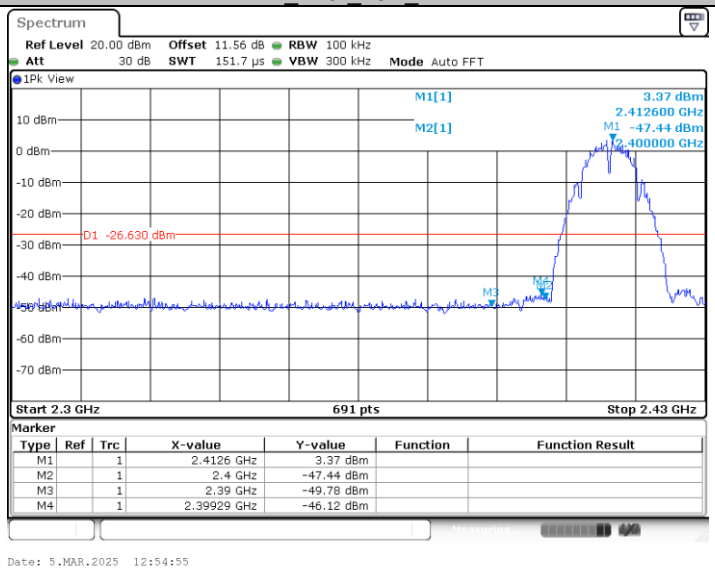

11B_Ant1_High_2462

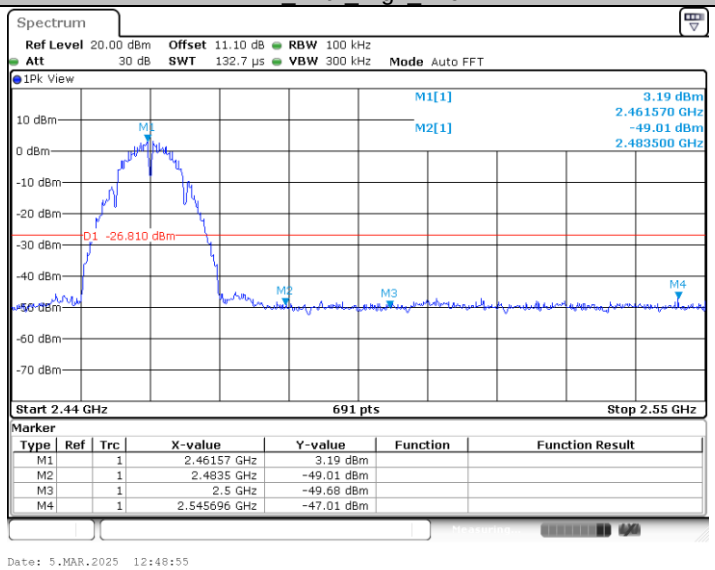

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

11B_Ant2_High_2462

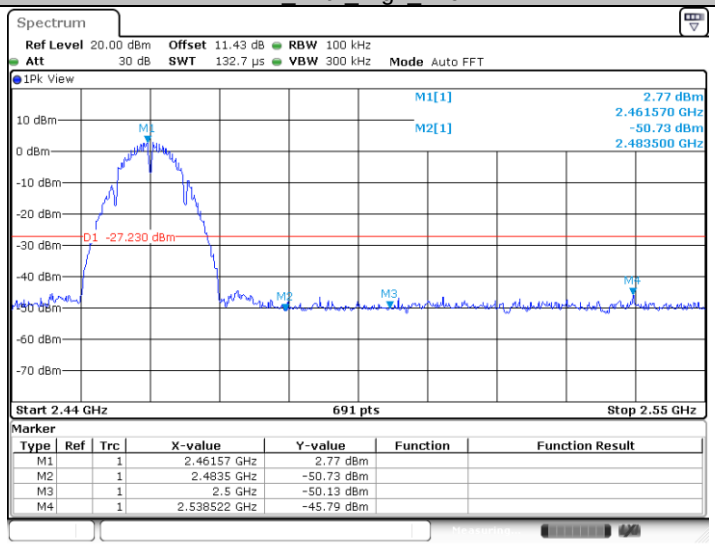

11G_Ant1_Low_2412

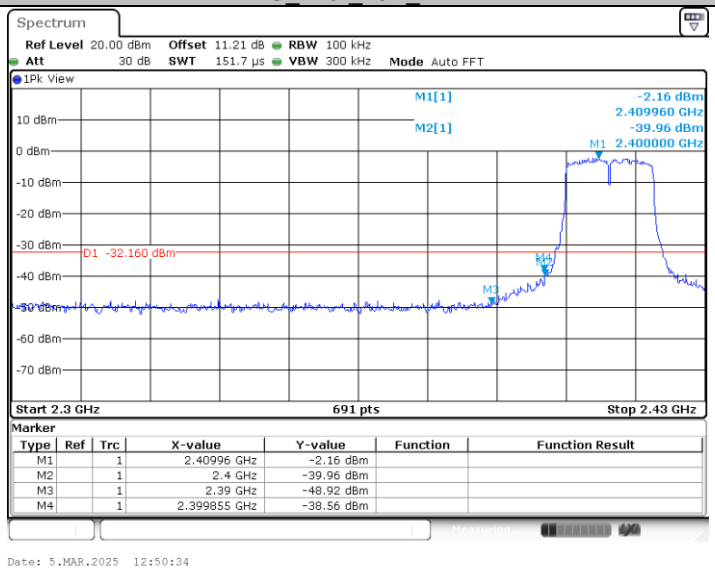

11G_Ant2_Low_2412

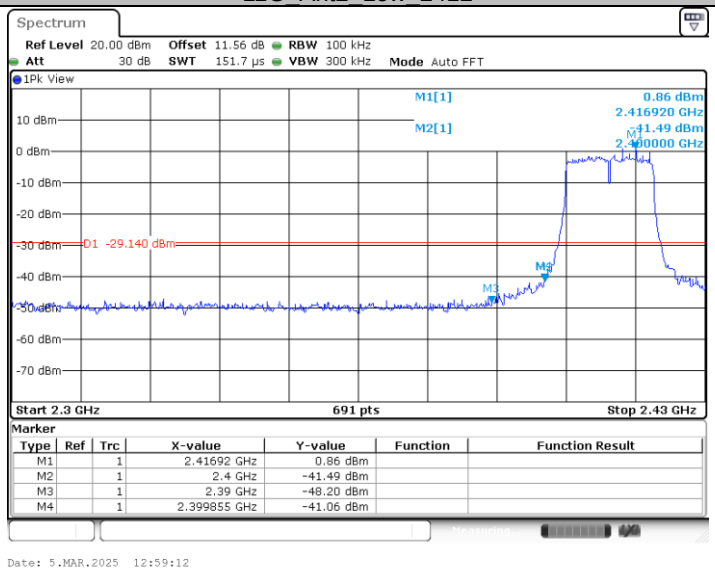

11G_Ant1_High_2462

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

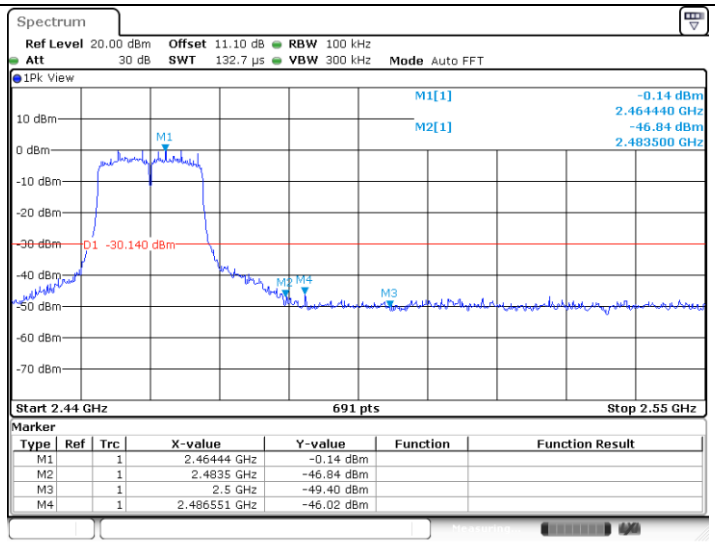

11G_Ant2_High_2462

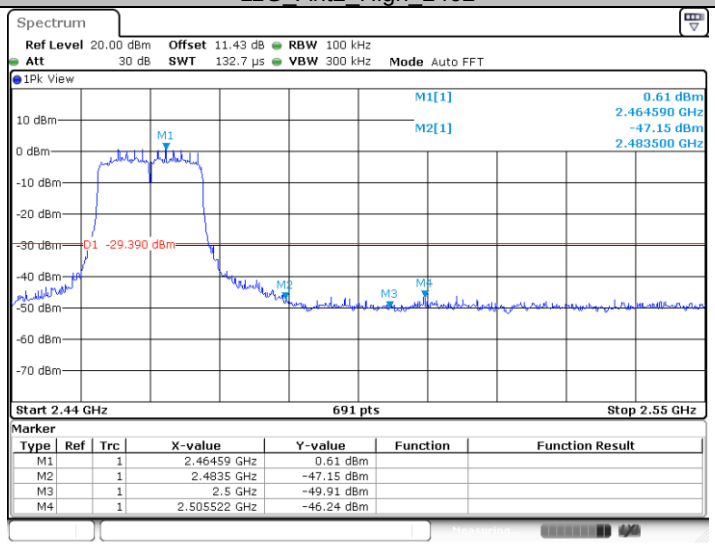

11N20MIMO_Ant1_Low_2412

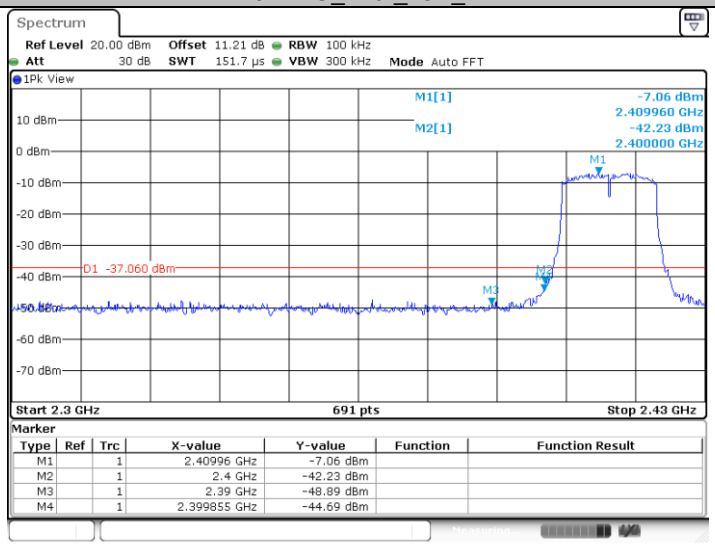

11N20MIMO_Ant2_Low_2412

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

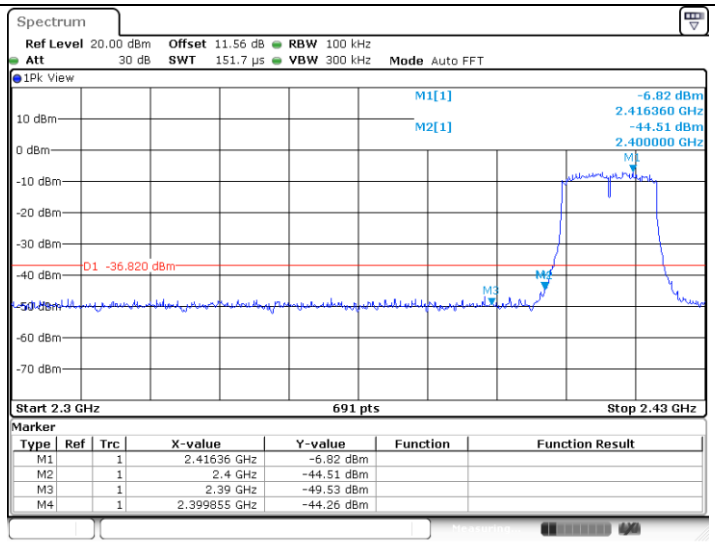

11N20MIMO_Ant1_High_2462

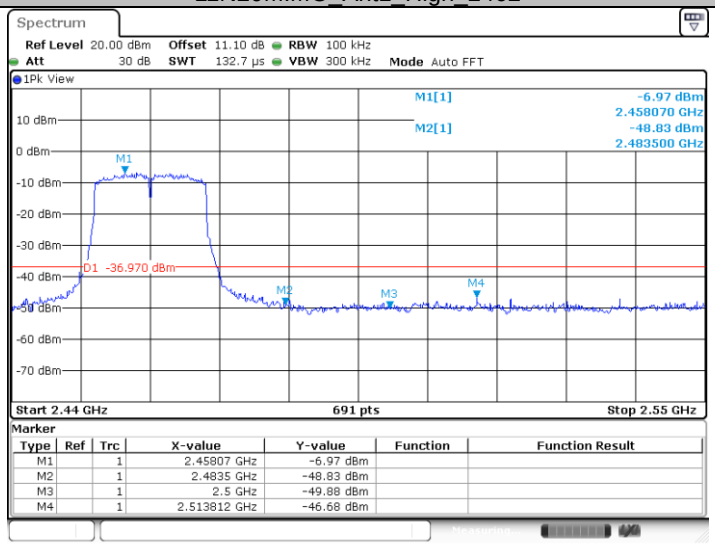

11N20MIMO_Ant2_High_2462

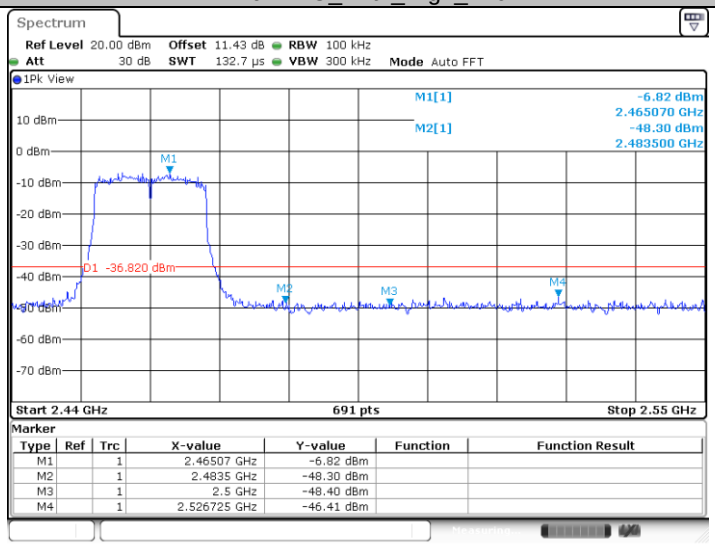

11N40MIMO_Ant1_Low_2422

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

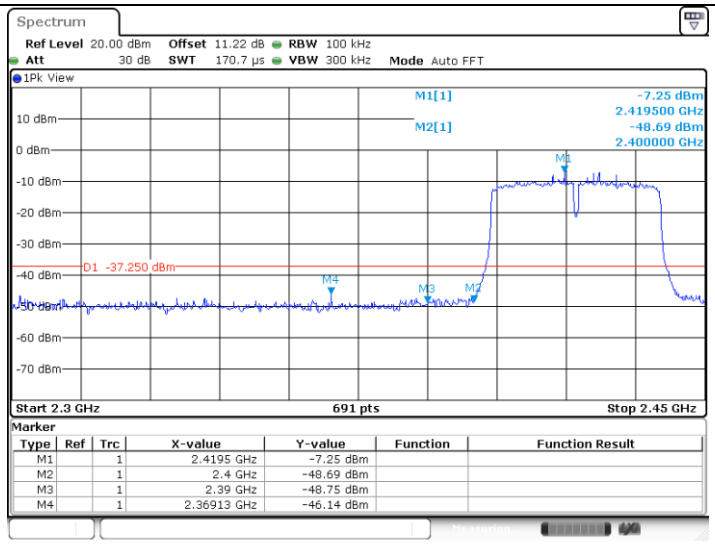

11N40MIMO_Ant2_Low_2422

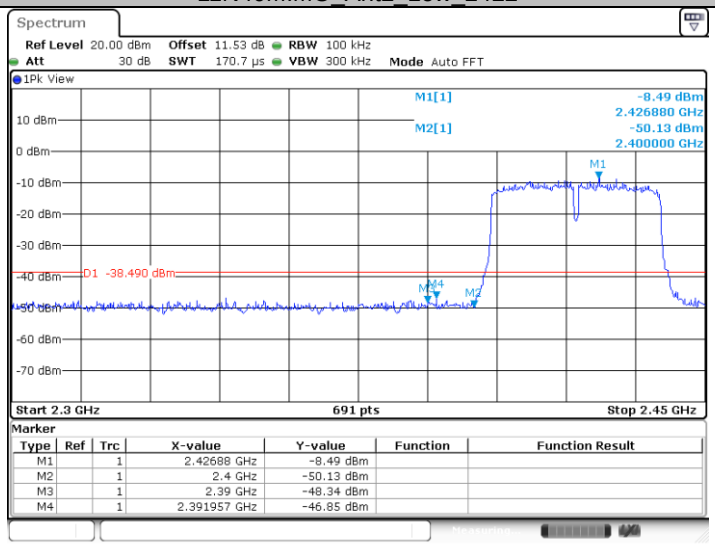

11N40MIMO_Ant1_High_2452

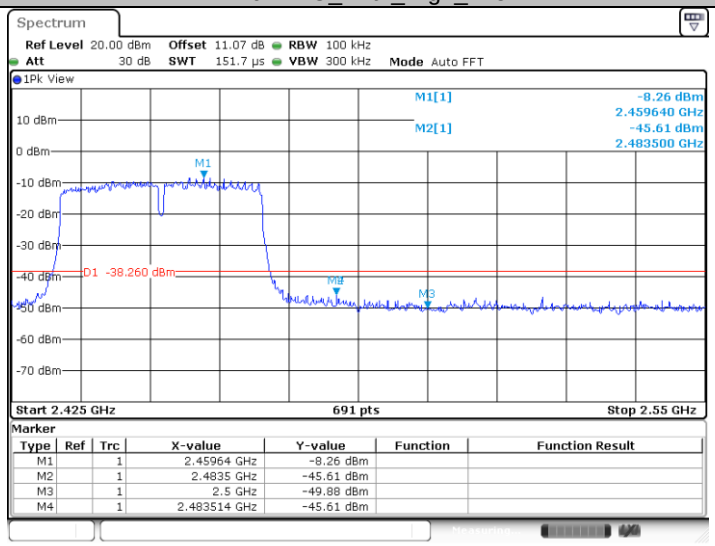

11N40MIMO_Ant2_High_2452

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

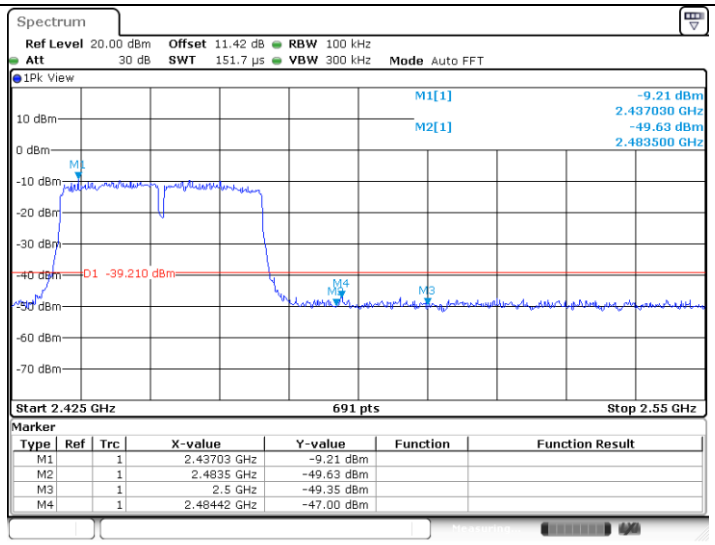

11AX20MIMO_Ant1_Low_2412

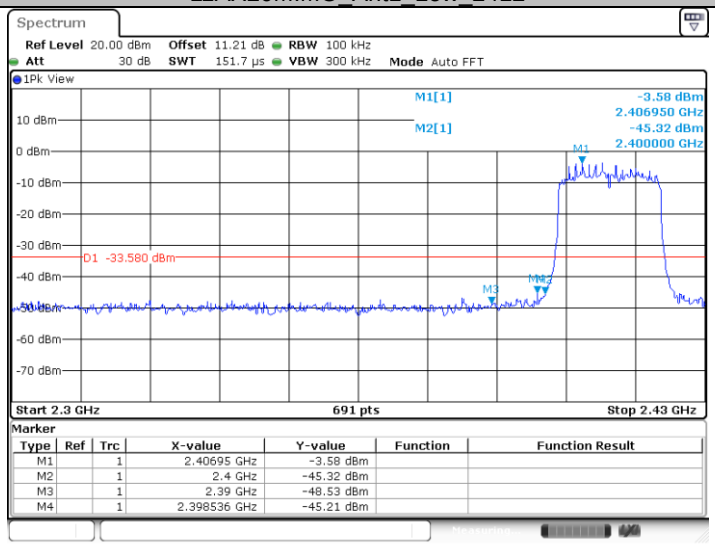

11AX20MIMO_Ant2_Low_2412

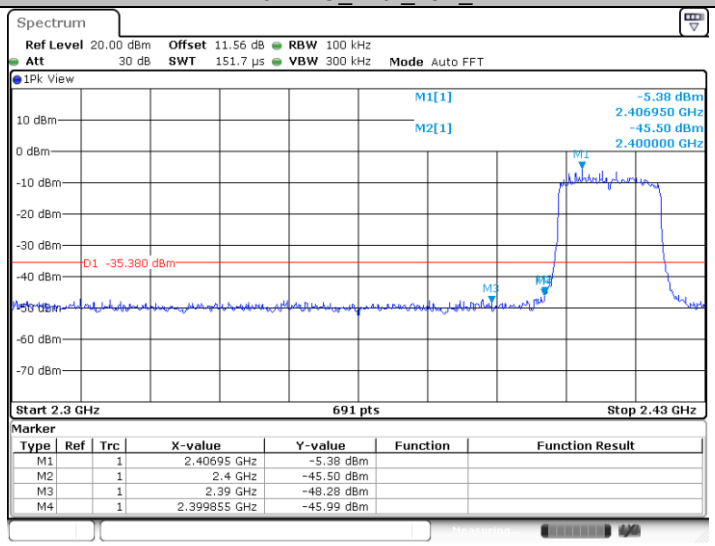

11AX20MIMO_Ant1_High_2462

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

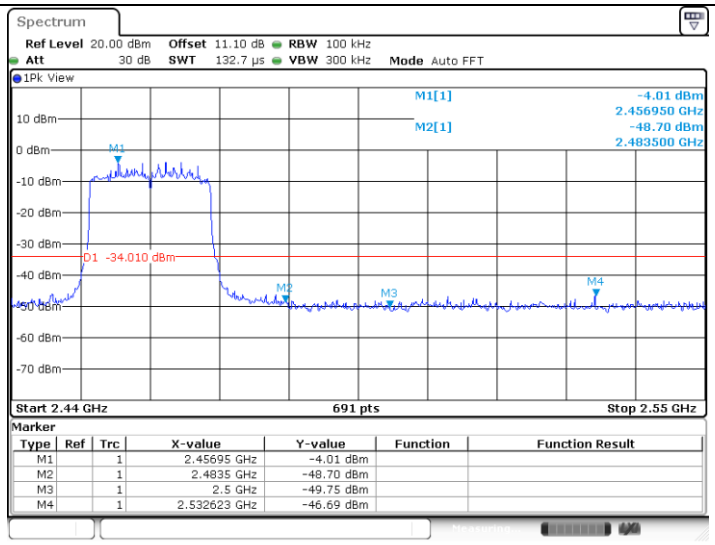

11AX20MIMO_Ant2_High_2462

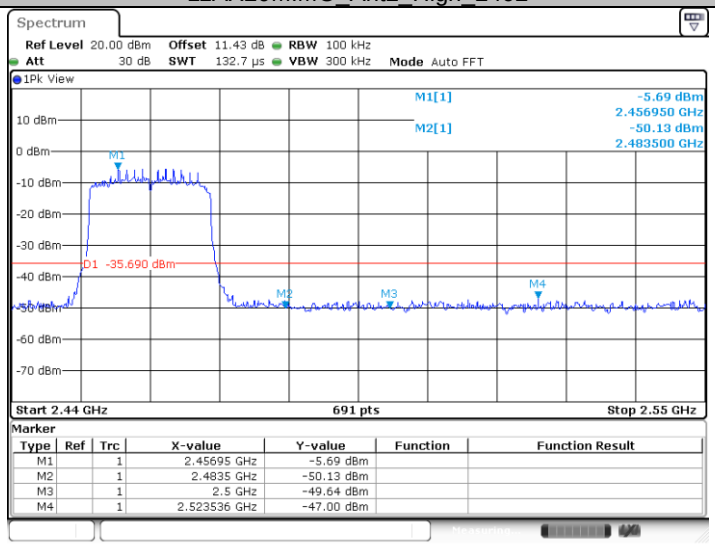

11AX40MIMO_Ant1_Low_2422

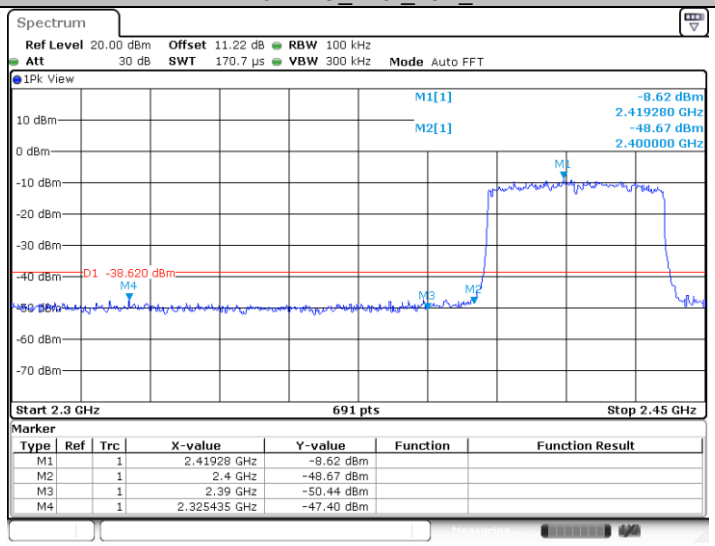

11AX40MIMO_Ant2_Low_2422

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

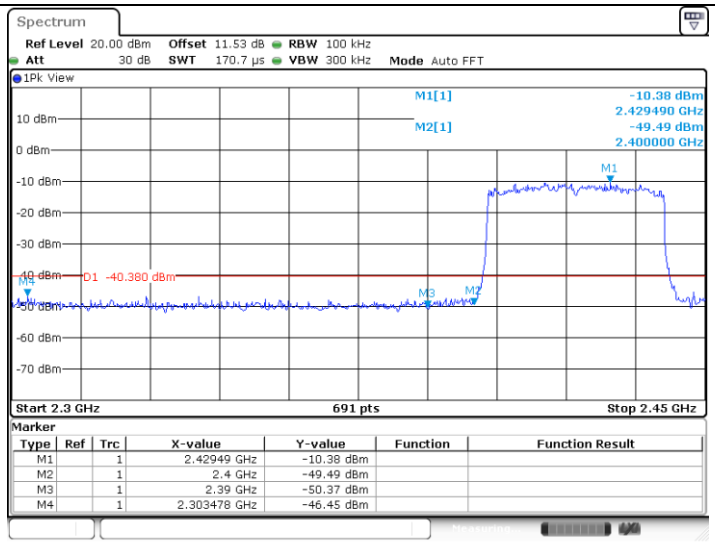

11AX40MIMO_Ant1_High_2452

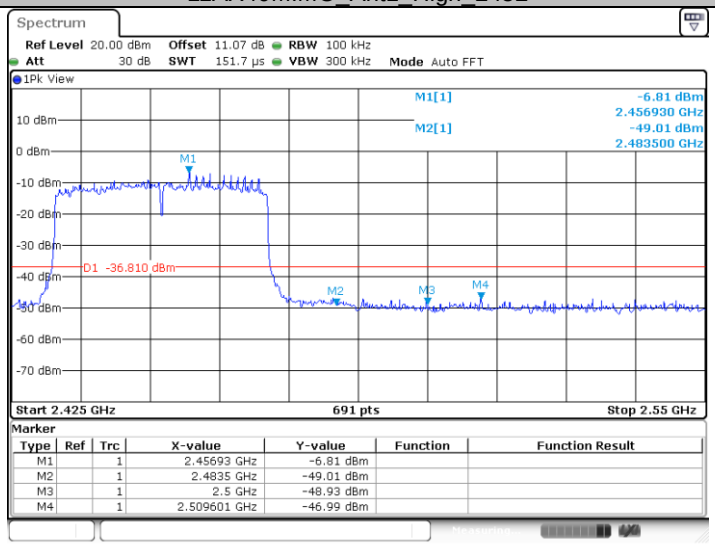

11AX40MIMO_Ant2_High_2452

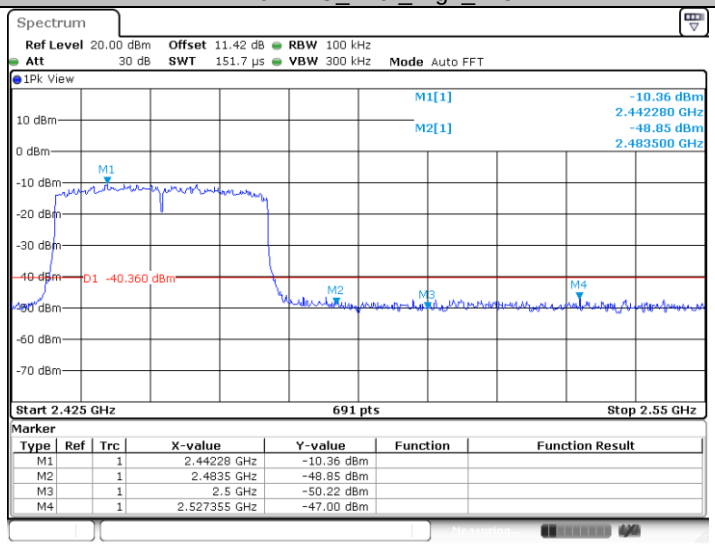

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

Conducted Spurious Emissions plot as follows:

11B_Ant1_2412_0~Reference

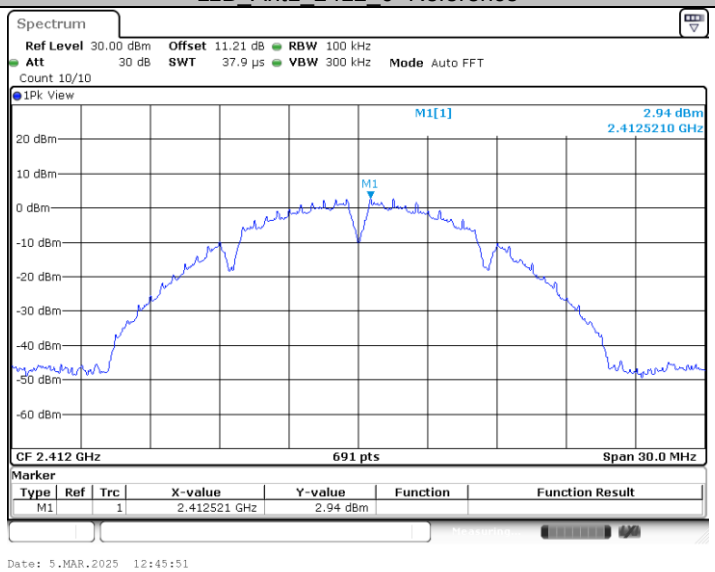

11B_Ant1_2412_30~1000

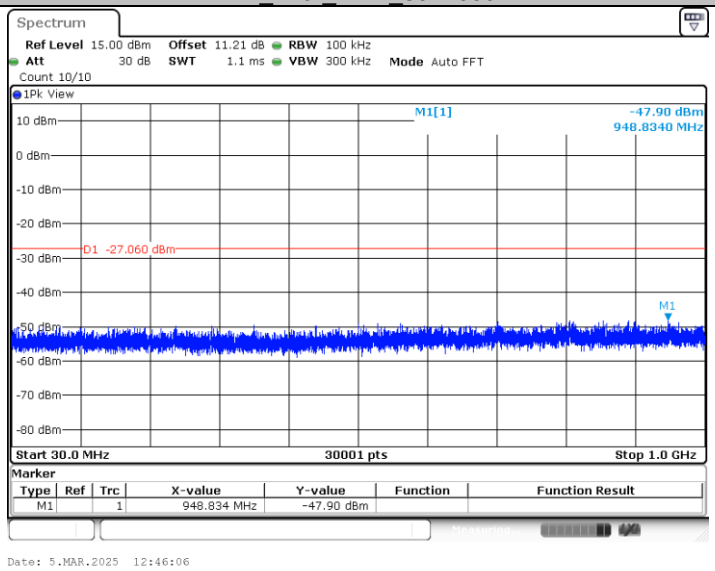

11B_Ant1_2412_1000~26500

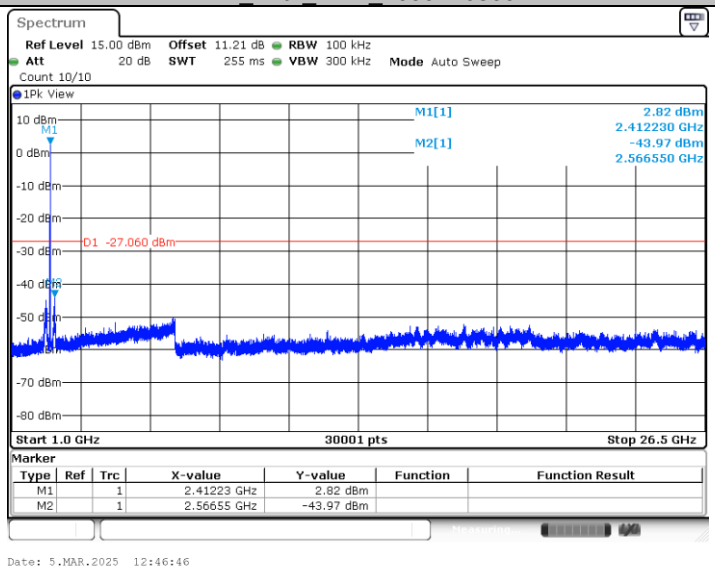

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

11B_Ant2_2412_0~Reference

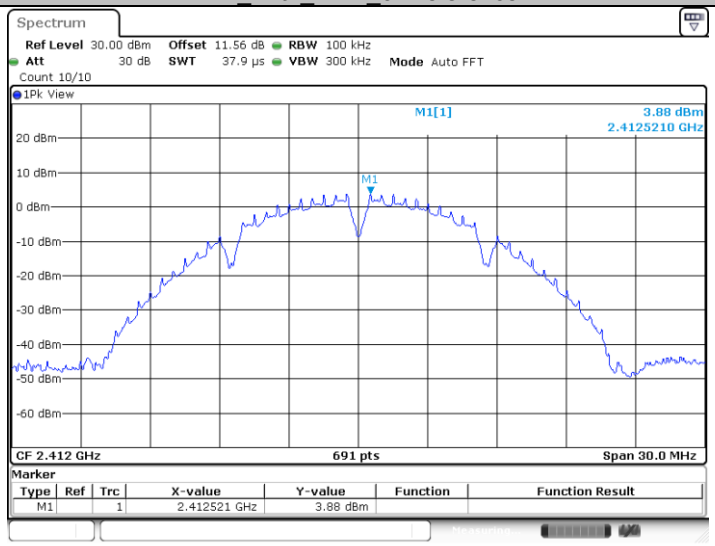

11B_Ant2_2412_30~1000

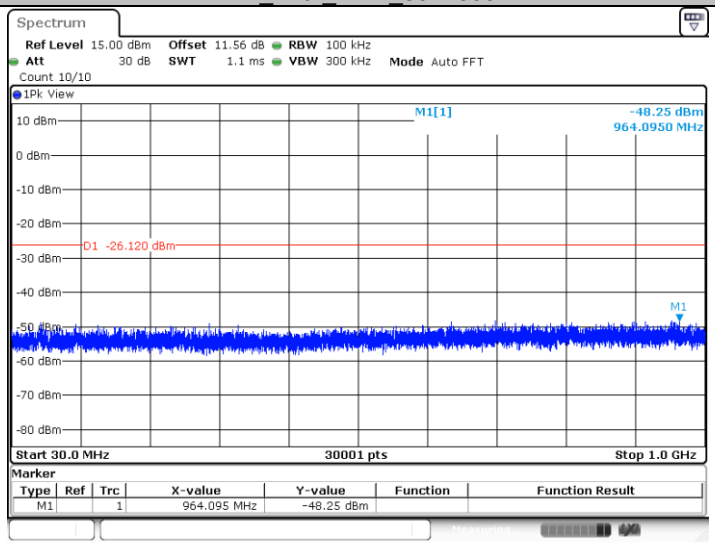

11B_Ant2_2412_1000~26500

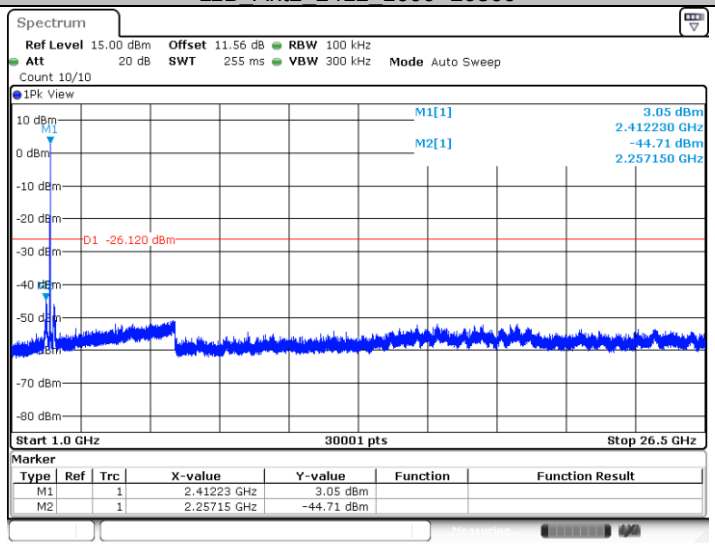

11B_Ant1_2437_0~Reference

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

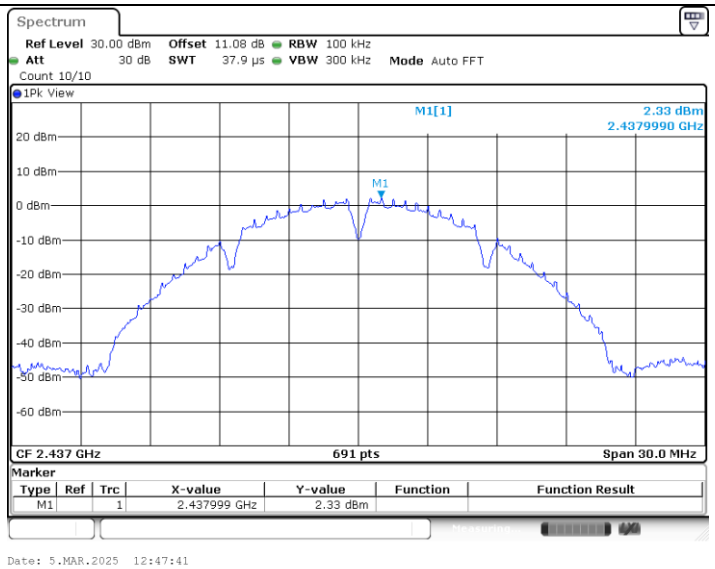

11B_Ant1_2437_30~1000

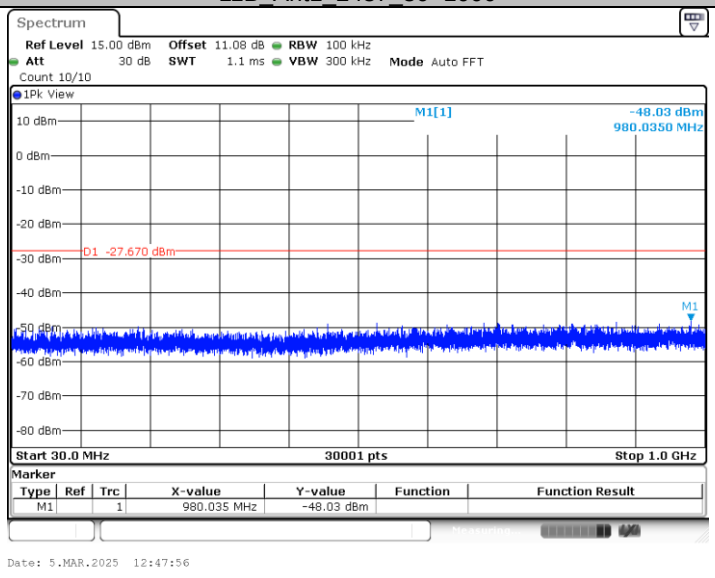

11B_Ant1_2437_1000~26500

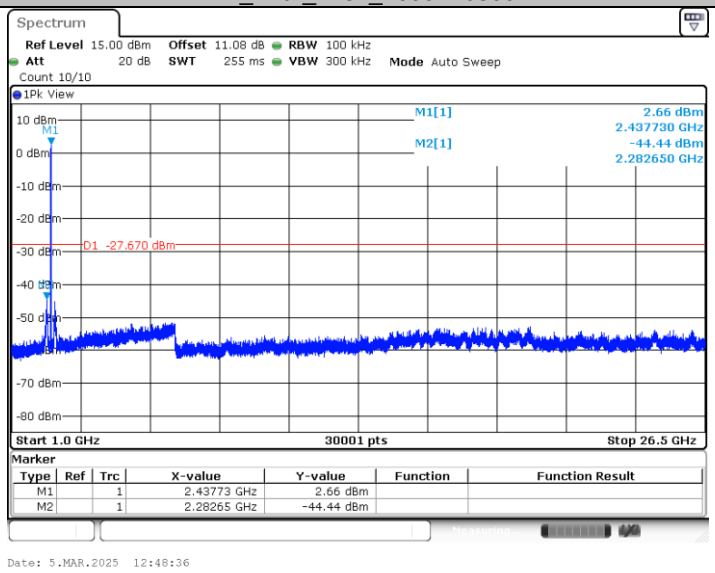

11B_Ant2_2437_0~Reference

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

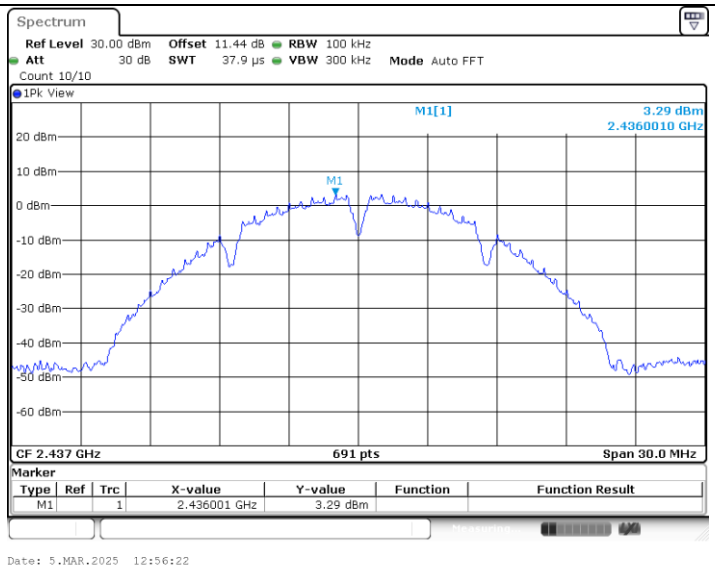

11B_Ant2_2437_30~1000

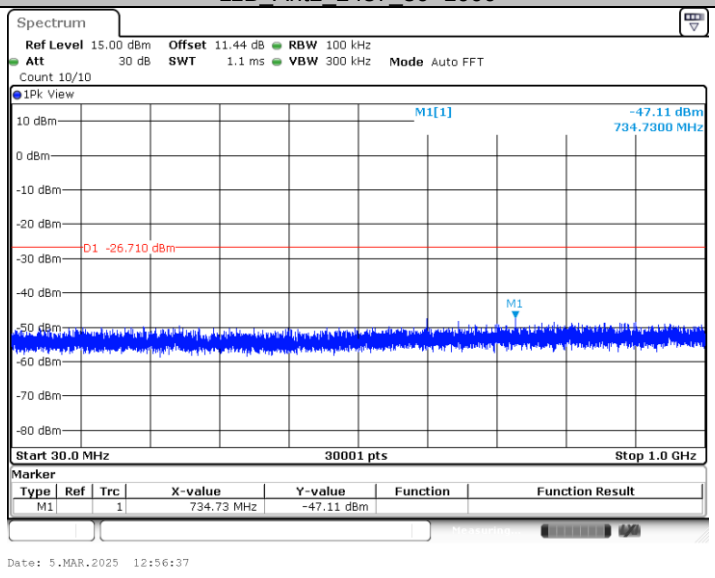

11B_Ant2_2437_1000~26500

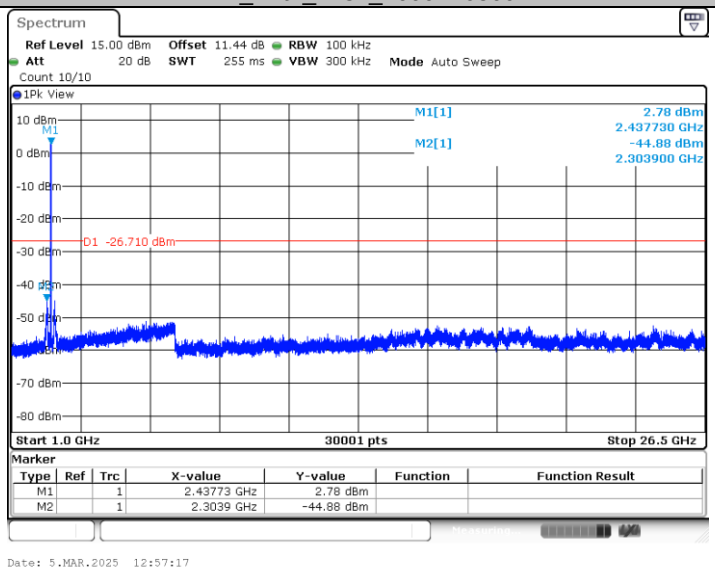

11B_Ant1_2462_0~Reference

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

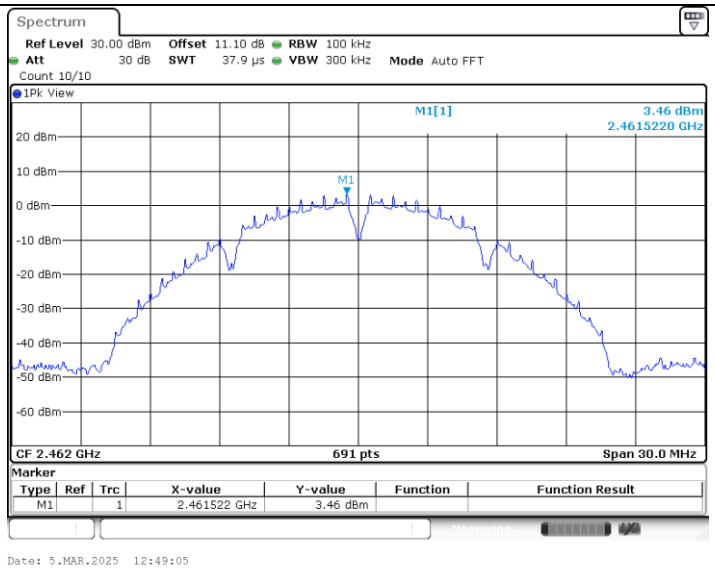

11B_Ant1_2462_30~1000

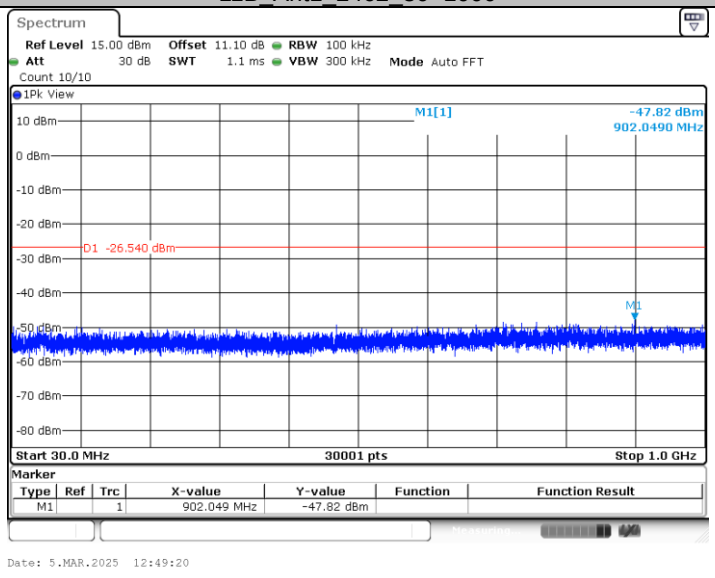

11B_Ant1_2462_1000~26500

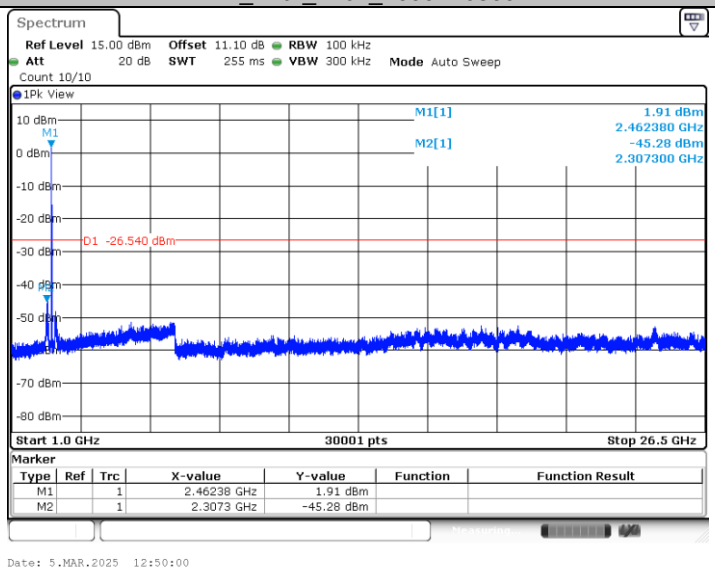

11B_Ant2_2462_0~Reference

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

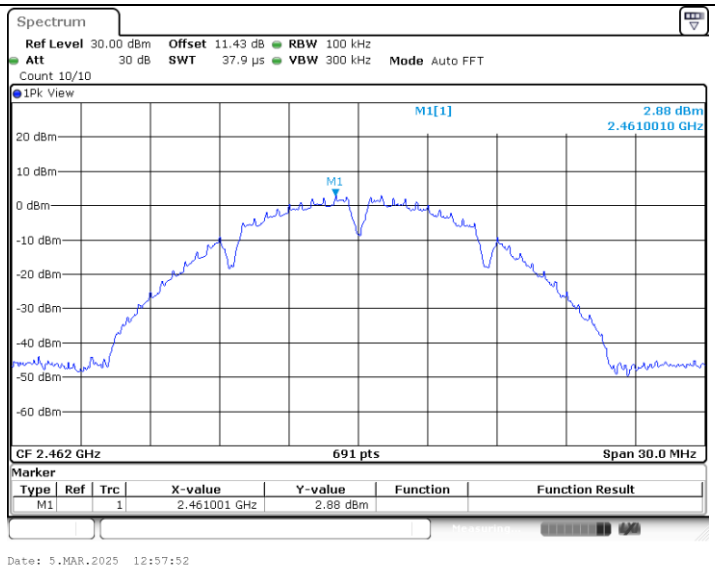

11B_Ant2_2462_30~1000

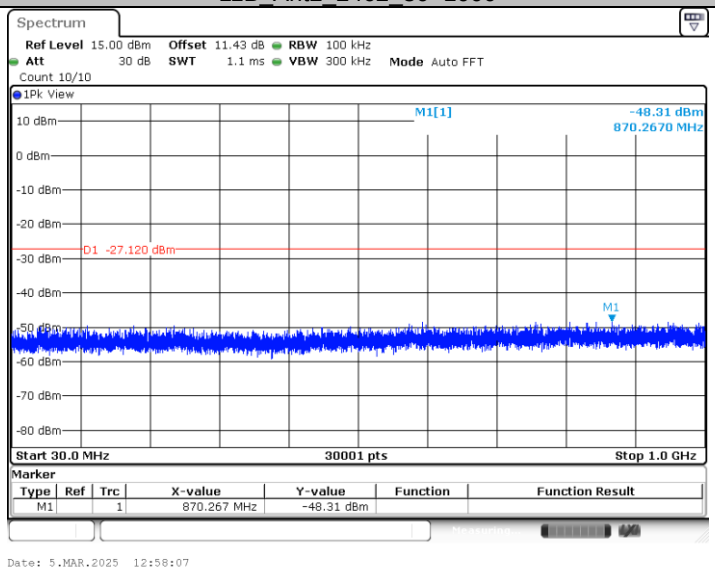

11B_Ant2_2462_1000~26500

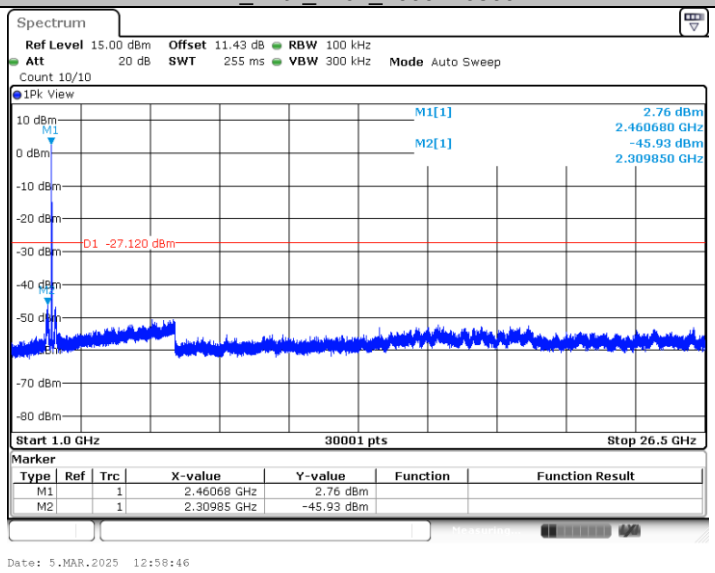

11G_Ant1_2412_0~Reference

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn