

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.4 MAXIMUM PEAK OUTPUT POWER

Test Date	2025/09/04~09	Temp./Hum.	23~25°C/54~61%
Cable Loss	Main: 1.60dB, AUX: 1.75dB	Tested By	Sam Chang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.4.1 Peak Output Power

● Wireless LAN Mode

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max Peak Output Power		Antenna Gain (dBi)		E.I.R.P ^{Note 2}		Limit
		Aux	Main	(dBm)	(W)	Aux	Main	(dBm)	(W)	
802.11b	2412	18.77	22.67	22.67	0.185	5.40	3.10	25.77	0.378	<30dBm (Maximum Peak Output Power)
	2417	19.65	22.18	22.18	0.165	5.40	3.10	25.28	0.337	
	2422	20.14	22.21	22.21	0.166	5.40	3.10	25.54	0.358	
	2442	22.18	22.81	22.81	0.191	5.40	3.10	27.58	0.573	
	2467	22.01	22.16	22.16	0.164	5.40	3.10	27.41	0.551	
	2472	19.23	20.46	20.46	0.111	5.40	3.10	24.63	0.290	
802.11g	2412	23.53	24.33	24.33	0.271	5.40	3.10	28.93	0.782	<36dBm (E.I.R.P)
	2417	24.70	25.32	25.32	0.340	5.40	3.10	30.10	1.023	
	2442	23.99	24.88	24.88	0.308	5.40	3.10	29.39	0.869	
	2462	24.79	25.47	25.47	0.352	5.40	3.10	30.19	1.045	
	2467	19.74	20.79	20.79	0.120	5.40	3.10	25.14	0.327	
	2472	23.83	24.50	24.50	0.282	5.40	3.10	29.23	0.838	

Note: 1. The results have been included cable loss.

2. E.I.R.P.= The Max. of Peak Output Power (AUX or Main)(dBm)+ Antenna Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power ^{Note 2}		Directional Gain ^{Note 3} (dBi)	E.I.R.P ^{Note 4}		Limit
		Aux	Main	(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	22.41	22.34	25.39	0.346	4.40	29.79	0.952	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2417	24.99	25.09	28.05	0.638	4.40	32.45	1.758	
	2442	24.09	24.42	27.27	0.533	4.40	31.67	1.468	
	2462	23.41	23.25	26.34	0.431	4.40	30.74	1.186	
	2467	18.75	18.01	21.41	0.138	4.40	25.81	0.381	
	2472	23.82	23.45	26.65	0.462	4.40	31.05	1.273	
802.11n-HT40	2422	23.20	22.80	26.01	0.399	4.40	30.41	1.100	
	2427	23.90	23.90	26.91	0.491	4.40	31.31	1.352	
	2432	23.98	24.43	27.22	0.527	4.40	31.62	1.452	
	2437	24.40	23.69	27.07	0.509	4.40	31.47	1.403	
	2442	23.63	24.17	26.92	0.492	4.40	31.32	1.355	
	2447	23.01	23.19	26.11	0.408	4.40	30.51	1.125	
	2452	23.15	23.47	26.32	0.429	4.40	30.72	1.181	
	2462	23.34	23.36	26.36	0.433	4.40	30.76	1.191	
802.11ax-HE20	2412	22.50	22.39	25.46	0.351	4.40	29.86	0.967	
	2417	25.26	25.32	28.30	0.676	4.40	32.70	1.862	
	2442	24.46	24.18	27.33	0.541	4.40	31.73	1.490	
	2462	23.48	23.60	26.55	0.452	4.40	30.95	1.245	
	2467	18.63	18.20	21.43	0.139	4.40	25.83	0.383	
	2472	23.08	23.28	26.19	0.416	4.40	30.59	1.146	
802.11ax-HE40	2422	22.75	23.17	25.98	0.396	4.40	30.38	1.090	
	2427	23.95	24.15	27.06	0.508	4.40	31.46	1.400	
	2432	24.27	23.98	27.14	0.517	4.40	31.54	1.425	
	2437	24.20	24.16	27.19	0.524	4.40	31.59	1.442	
	2442	24.25	23.98	27.13	0.516	4.40	31.53	1.421	
	2447	23.56	23.00	26.30	0.427	4.40	30.70	1.175	
	2452	22.88	23.37	26.14	0.411	4.40	30.54	1.133	
	2462	23.14	23.31	26.24	0.420	4.40	30.64	1.158	
802.11be-EHT20	2412	22.59	22.32	25.47	0.352	4.40	29.87	0.970	
	2417	24.76	24.90	27.84	0.608	4.40	32.24	1.675	
	2442	23.71	24.07	26.90	0.490	4.40	31.30	1.350	
	2462	23.85	23.38	26.63	0.460	4.40	31.03	1.268	
	2467	18.80	18.59	21.71	0.148	4.40	26.11	0.408	
	2472	23.07	22.73	25.91	0.390	4.40	30.31	1.075	
802.11be-EHT40	2422	23.22	23.27	26.26	0.422	4.40	30.66	1.163	
	2427	23.73	24.05	26.90	0.490	4.40	31.30	1.350	
	2432	24.43	24.13	27.29	0.536	4.40	31.69	1.477	
	2437	24.31	24.02	27.18	0.522	4.40	31.58	1.438	
	2442	23.96	24.20	27.09	0.512	4.40	31.49	1.410	
	2447	22.81	23.67	26.27	0.424	4.40	30.67	1.167	
	2452	22.84	23.30	26.09	0.406	4.40	30.49	1.119	
	2462	23.40	23.29	26.36	0.432	4.40	30.76	1.190	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{3.1/10} + 10^{5.4/10})/2] = 4.40$ Bi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	RU Configuration	Peak Output Power (dBm)		Total Peak Output Power ^{Note 2}		Directional Gain ^{Note 3} (dBi)	E.I.R.P. ^{Note 4}		Limit
			Aux	Main	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	26/0	23.96	23.92	26.95	0.495	4.40	31.35	1.365	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P.)
		52/37	23.90	23.60	26.76	0.475	4.40	31.16	1.307	
		106/53	23.98	23.62	26.81	0.480	4.40	31.21	1.323	
	2472	26/8	16.32	16.16	19.25	0.084	4.40	23.65	0.232	
		52/40	15.64	15.53	18.60	0.072	4.40	23.00	0.199	
		106/54	19.69	19.86	22.79	0.190	4.40	27.19	0.523	
802.11ax-HE40	2422	242/61	22.70	22.66	25.69	0.371	4.40	30.09	1.021	
	2462	242/62	25.80	25.24	28.54	0.714	4.40	32.94	1.968	
802.11be-EHT20	2412	26/0	24.44	23.96	27.22	0.527	4.40	31.62	1.451	
		52/37	23.55	23.66	26.62	0.459	4.40	31.02	1.263	
		106/53	23.67	23.64	26.67	0.464	4.40	31.07	1.278	
	2472	26/8	16.85	16.89	19.88	0.097	4.40	24.28	0.268	
		52/40	16.24	15.87	19.07	0.081	4.40	23.47	0.222	
		106/54	20.10	19.94	23.03	0.201	4.40	27.43	0.553	
802.11be-EHT40	2422	242/61	22.25	22.65	25.46	0.352	4.40	29.86	0.969	
	2462	242/62	23.75	24.23	27.01	0.502	4.40	31.41	1.383	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{3.1/10} + 10^{5.4/10})/2] = 4.40$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).

● BLE Mode

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power ^{Note 2}		Directional Gain ^{Note 3} (dBi)	E.I.R.P. ^{Note 4}		Limit
		Aux	Main	(dBm)	(W)		(dBm)	(W)	
BLE (1Mbps)	2402	14.81	14.76	17.80	0.060	4.40	22.20	0.166	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P.)
	2440	15.02	15.17	18.11	0.065	4.40	22.51	0.178	
	2480	15.05	15.61	18.35	0.068	4.40	22.75	0.188	
BLE (2Mbps)	2402	14.50	14.82	17.67	0.059	4.40	22.07	0.161	
	2440	14.95	15.25	18.11	0.065	4.40	22.51	0.178	
	2480	15.42	15.57	18.51	0.071	4.40	22.91	0.195	
BLE (PHY Coded S2)	2402	13.11	13.45	16.29	0.043	4.40	20.69	0.117	
	2440	13.20	13.33	16.28	0.042	4.40	20.68	0.117	
	2480	13.31	13.56	16.45	0.044	4.40	20.85	0.122	
BLE (PHY Coded S8)	2402	13.20	13.06	16.14	0.041	4.40	20.54	0.113	
	2440	13.12	13.69	16.42	0.044	4.40	20.82	0.121	
	2480	13.08	13.67	16.40	0.044	4.40	20.80	0.120	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{3.1/10} + 10^{5.4/10})/2] = 4.40$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.4.2 Average Output Power (Reporting only)

● Wireless LAN Mode

Mode	Centre Frequency (MHz)	Average Output Power(dBm)		Duty cycle factor (dB) 10log (1/x)	Max Average Output Power		Antenna Gain (dBi)		E.I.R.P. ^{Note2}		Limit
		Aux	Main		(dBm)	(W)	Aux	Main	(dBm)	(W)	
802.11b	2412	16.70	20.11	N/A	20.11	0.103	5.40	3.10	23.21	0.209	<30dBm (Maximum Peak Output Power)
	2417	17.18	20.38	N/A	20.38	0.109	5.40	3.10	23.48	0.223	
	2422	18.18	20.05	N/A	20.05	0.101	5.40	3.10	23.58	0.228	
	2442	20.37	20.65	N/A	20.65	0.116	5.40	3.10	25.77	0.378	
	2467	19.87	19.94	N/A	19.94	0.099	5.40	3.10	25.27	0.337	
	2472	17.20	18.12	N/A	18.12	0.065	5.40	3.10	22.60	0.182	
802.11g	2412	18.96	19.65	N/A	19.65	0.092	5.40	3.10	24.36	0.273	<36dBm (E.I.R.P.)
	2417	19.91	20.60	N/A	20.60	0.115	5.40	3.10	25.31	0.340	
	2442	19.08	20.39	N/A	20.39	0.109	5.40	3.10	24.48	0.281	
	2462	20.12	20.34	N/A	20.34	0.108	5.40	3.10	25.52	0.356	
	2467	15.26	16.20	N/A	16.20	0.042	5.40	3.10	20.66	0.116	
	2472	13.69	14.59	N/A	14.59	0.029	5.40	3.10	19.09	0.081	

Note: 1. The results have been included cable loss.

2. E.I.R.P.= The Max. of Peak Output Power (AUX or Main)(dBm)+ Antenna Gain (dBi).

3. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Duty cycle factor (dB) 10 log (1/x)	Total Average Output Power ^{Note 2}		Directional Gain ^{Note 3} (dBi)	E.I.R.P. ^{Note 4}		Limit
		Aux	Main		(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	16.98	17.33	N/A	20.17	0.104	4.40	24.57	0.286	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P.)
	2417	20.37	20.07	N/A	23.23	0.211	4.40	27.63	0.580	
	2442	19.04	19.36	N/A	22.21	0.166	4.40	26.61	0.458	
	2462	18.57	18.29	N/A	21.44	0.139	4.40	25.84	0.384	
	2467	13.57	13.12	N/A	16.36	0.043	4.40	20.76	0.119	
	2472	12.55	11.98	N/A	15.28	0.034	4.40	19.68	0.093	
802.11n-HT40	2422	17.31	17.16	N/A	20.25	0.106	4.40	24.65	0.291	
	2427	18.40	18.06	N/A	21.24	0.133	4.40	25.64	0.367	
	2432	18.21	18.56	N/A	21.40	0.138	4.40	25.80	0.380	
	2437	18.52	17.95	N/A	21.25	0.133	4.40	25.65	0.368	
	2442	18.39	17.96	N/A	21.19	0.132	4.40	25.59	0.362	
	2447	17.59	17.42	N/A	20.52	0.113	4.40	24.92	0.310	
	2452	17.16	17.75	N/A	20.48	0.112	4.40	24.88	0.307	
802.11ax-HE20	2462	12.47	12.57	N/A	15.53	0.036	4.40	19.93	0.098	
	2412	16.91	17.12	N/A	20.03	0.101	4.40	24.43	0.277	
	2417	19.93	19.99	N/A	22.97	0.198	4.40	27.37	0.546	
	2442	19.13	19.04	N/A	22.10	0.162	4.40	26.50	0.446	
	2462	18.21	18.18	N/A	21.21	0.132	4.40	25.61	0.364	
	2467	13.04	13.55	N/A	16.31	0.043	4.40	20.71	0.118	
802.11ax-HE40	2472	12.54	12.32	N/A	15.44	0.035	4.40	19.84	0.096	
	2422	17.44	17.42	N/A	20.44	0.111	4.40	24.84	0.305	
	2427	17.98	17.79	N/A	20.90	0.123	4.40	25.30	0.339	
	2432	18.48	18.18	N/A	21.34	0.136	4.40	25.74	0.375	
	2437	18.40	18.37	N/A	21.40	0.138	4.40	25.80	0.380	
	2442	18.03	18.17	N/A	21.11	0.129	4.40	25.51	0.356	
	2447	17.37	17.15	N/A	20.27	0.106	4.40	24.67	0.293	
	2452	17.27	17.57	N/A	20.43	0.110	4.40	24.83	0.304	
802.11be-EHT20	2462	12.65	12.43	N/A	15.55	0.036	4.40	19.95	0.099	
	2412	17.14	17.15	N/A	20.16	0.104	4.40	24.56	0.285	
	2417	19.78	20.28	N/A	23.05	0.202	4.40	27.45	0.556	
	2442	18.56	19.22	N/A	21.91	0.155	4.40	26.31	0.428	
	2462	18.58	18.38	N/A	21.49	0.141	4.40	25.89	0.388	
	2467	13.48	13.25	N/A	16.38	0.043	4.40	20.78	0.120	
802.11be-EHT40	2472	12.43	12.23	N/A	15.34	0.034	4.40	19.74	0.094	
	2422	17.35	17.31	N/A	20.34	0.108	4.40	24.74	0.298	
	2427	18.06	18.21	N/A	21.15	0.130	4.40	25.55	0.359	
	2432	18.05	18.43	N/A	21.25	0.133	4.40	25.65	0.368	
	2437	18.41	17.86	N/A	21.15	0.130	4.40	25.55	0.359	
	2442	18.00	17.88	N/A	20.95	0.124	4.40	25.35	0.343	
	2447	17.43	17.11	N/A	20.28	0.107	4.40	24.68	0.294	
	2452	17.38	17.30	N/A	20.35	0.108	4.40	24.75	0.299	
802.11be-EHT40	2462	12.51	12.48	N/A	15.51	0.036	4.40	19.91	0.098	
	2467	13.51	13.48	N/A	16.31	0.043	4.40	20.71	0.118	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{3.1/10} + 10^{5.4/10})/2] = 4.40 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	RU Configuration	Average Output Power(dBm)		Duty cycle factor (dB) 10log (1/x)	Total Average Output Power ^{Note 2}		Directional Gain ^{Note3} (dBi)	E.I.R.P ^{Note4}		Limit
			Aux	Main		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	26/0	19.81	19.46	0	22.65	0.184	4.40	27.05	0.507	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
		52/37	19.80	19.55	0	22.69	0.186	4.40	27.09	0.511	
		106/53	19.49	19.52	0	22.52	0.178	4.40	26.92	0.492	
	2472	26/8	3.06	2.21	0	5.67	0.004	4.40	10.07	0.010	
		52/40	2.16	1.98	0	5.08	0.003	4.40	9.48	0.009	
		106/54	8.23	8.19	0	11.22	0.013	4.40	15.62	0.036	
802.11ax-HE40	2422	242/61	17.11	17.24	0	20.19	0.104	4.40	24.59	0.287	
	2462	242/62	12.33	12.11	0	15.23	0.033	4.40	19.63	0.092	
802.11be-EHT20	2412	26/0	19.73	19.03	0	22.40	0.174	4.40	26.80	0.479	
		52/37	19.59	19.83	0	22.72	0.187	4.40	27.12	0.515	
		106/53	19.84	19.83	0	22.85	0.193	4.40	27.25	0.530	
	2472	26/8	2.98	2.63	0	5.82	0.004	4.40	10.22	0.011	
		52/40	1.83	1.45	0	4.65	0.003	4.40	9.05	0.008	
		106/54	8.03	7.81	0	10.93	0.012	4.40	15.33	0.034	
802.11be-EHT40	2422	242/61	17.37	17.28	0	20.34	0.108	4.40	24.74	0.298	
	2462	242/62	12.94	12.22	0	15.61	0.036	4.40	20.01	0.100	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{3.1/10} + 10^{5.4/10})/2] = 4.40$ Bi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).

● BLE Mode

Mode	Centre Frequency (MHz)	Average Output Power(dBm)		Duty cycle factor (dB) 10log (1/x)	Total Average Output Power ^{Note 2}		Directional Gain ^{Note3} (dBi)	E.I.R.P ^{Note4}		Limit
		Aux	Main		(dBm)	(W)		(dBm)	(W)	
BLE (1Mbps)	2402	12.53	12.91	2.161	17.90	0.062	4.40	22.30	0.170	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2440	13.02	12.92	2.161	18.14	0.065	4.40	22.54	0.180	
	2480	13.23	13.06	2.161	18.32	0.068	4.40	22.72	0.187	
BLE (2Mbps)	2402	9.90	9.79	5.045	17.90	0.062	4.40	22.30	0.170	
	2440	10.41	10.53	5.045	18.53	0.071	4.40	22.93	0.196	
	2480	10.20	10.50	5.045	18.41	0.069	4.40	22.81	0.191	
BLE (PHY Coded S2)	2402	11.03	10.58	2.487	16.31	0.043	4.40	20.71	0.118	
	2440	10.99	10.92	2.487	16.45	0.044	4.40	20.85	0.122	
	2480	10.50	10.80	2.487	16.15	0.041	4.40	20.55	0.113	
BLE (PHY Coded S8)	2402	12.20	12.07	0.825	15.97	0.040	4.40	20.37	0.109	
	2440	12.44	12.52	0.825	16.32	0.043	4.40	20.72	0.118	
	2480	12.27	12.77	0.825	16.36	0.043	4.40	20.76	0.119	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{3.1/10} + 10^{5.4/10})/2] = 4.40$ Bi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.5 EMISSION LIMITATIONS


Test Date	2025/09/22~23	Temp./Hum.	23~24°C/58~63%
Cable Loss	Main: 1.60dB, AUX: 1.75dB	Tested By	Sean Wang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

● Wireless LAN Mode

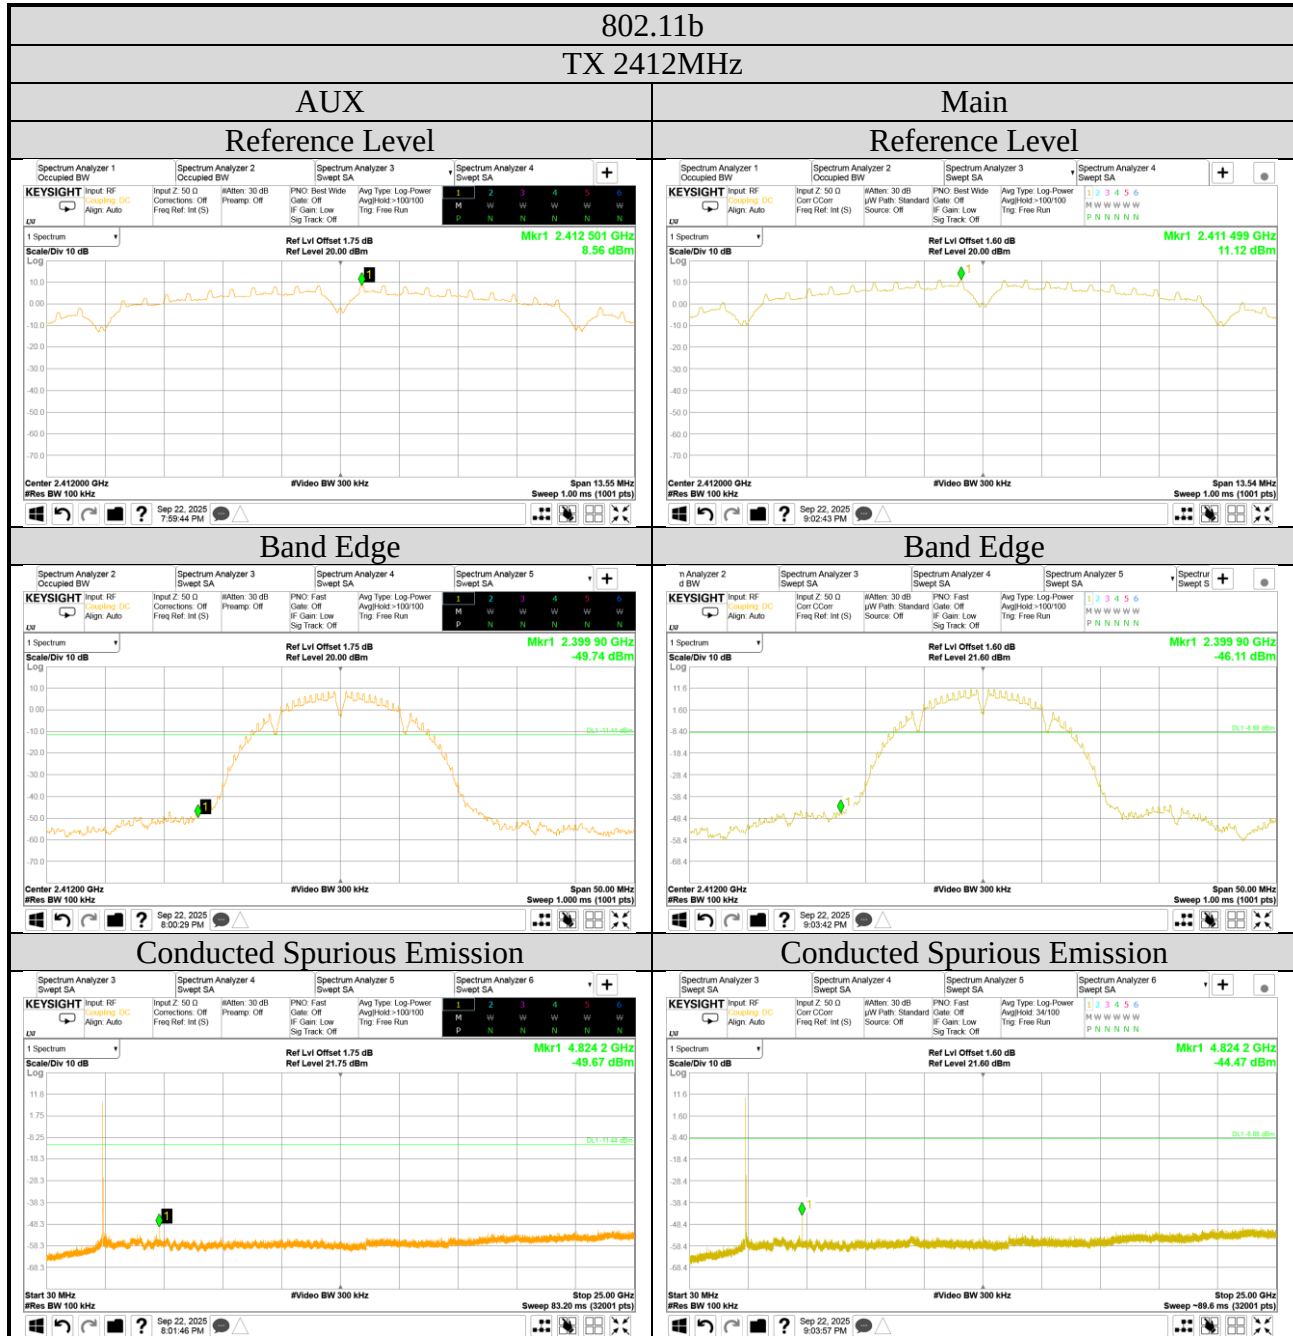


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

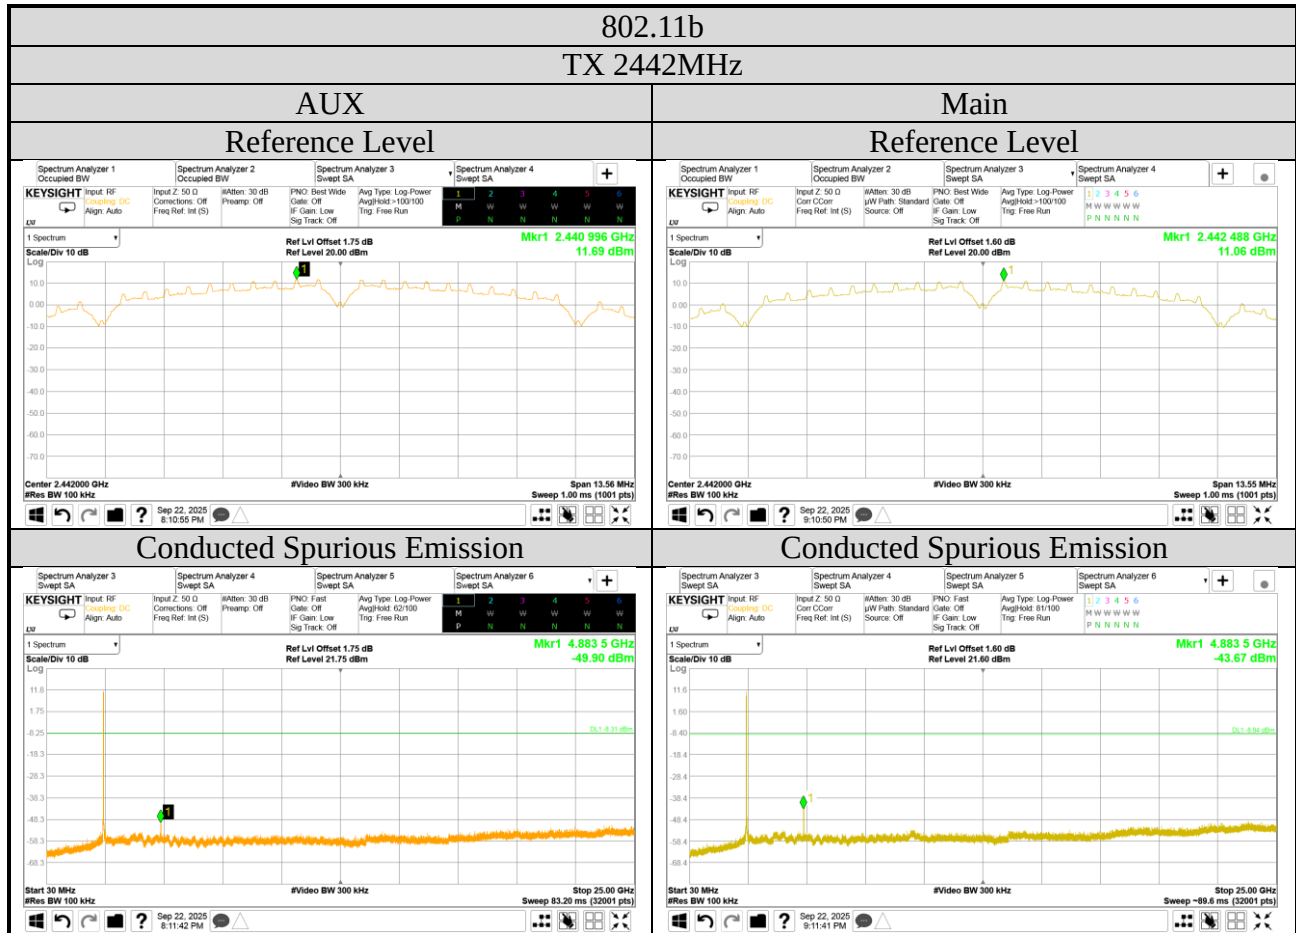


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

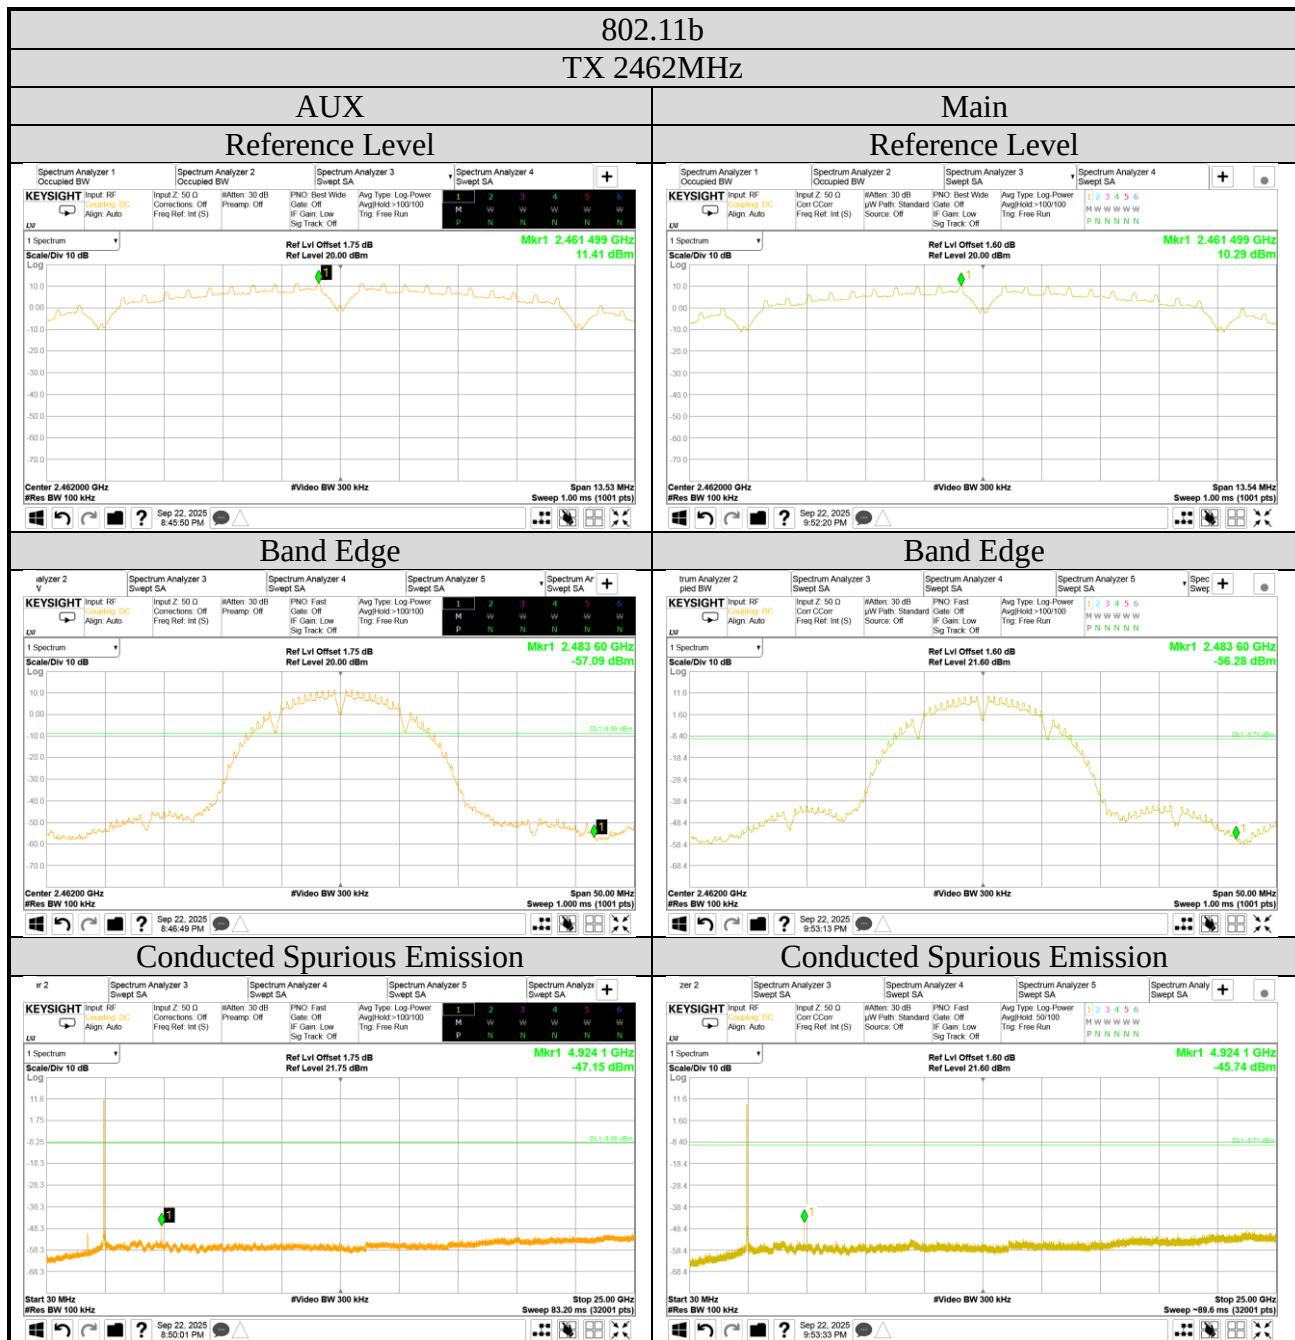


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

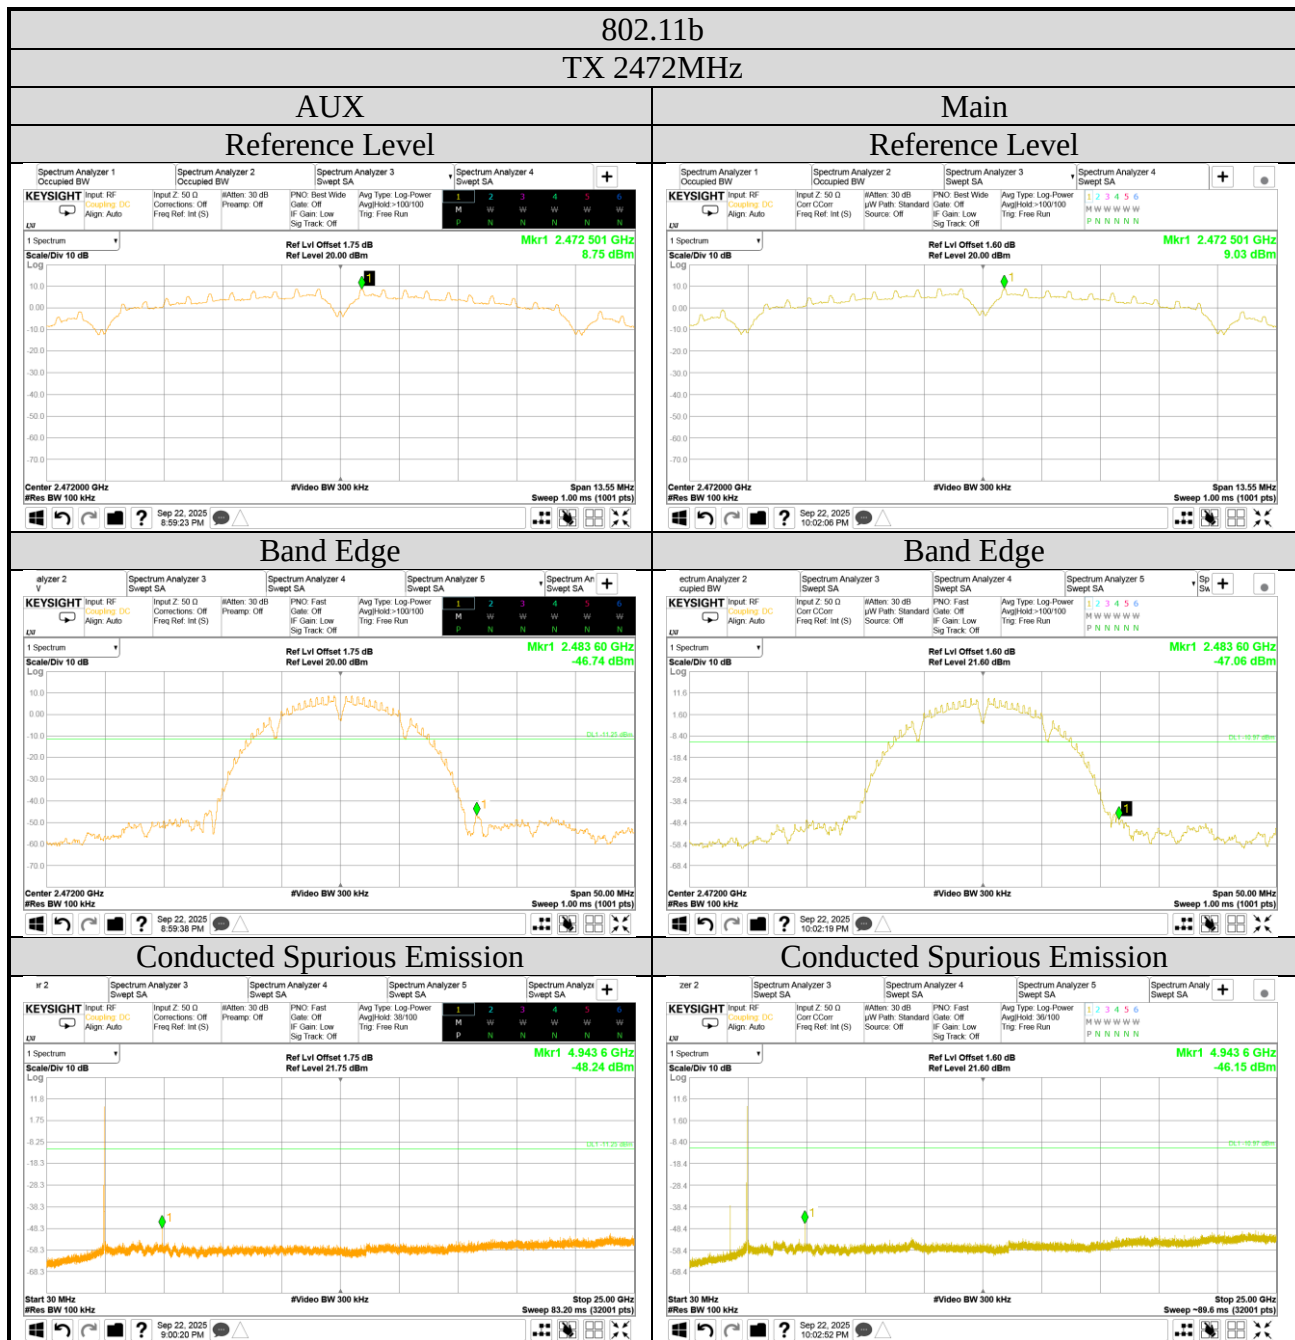


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

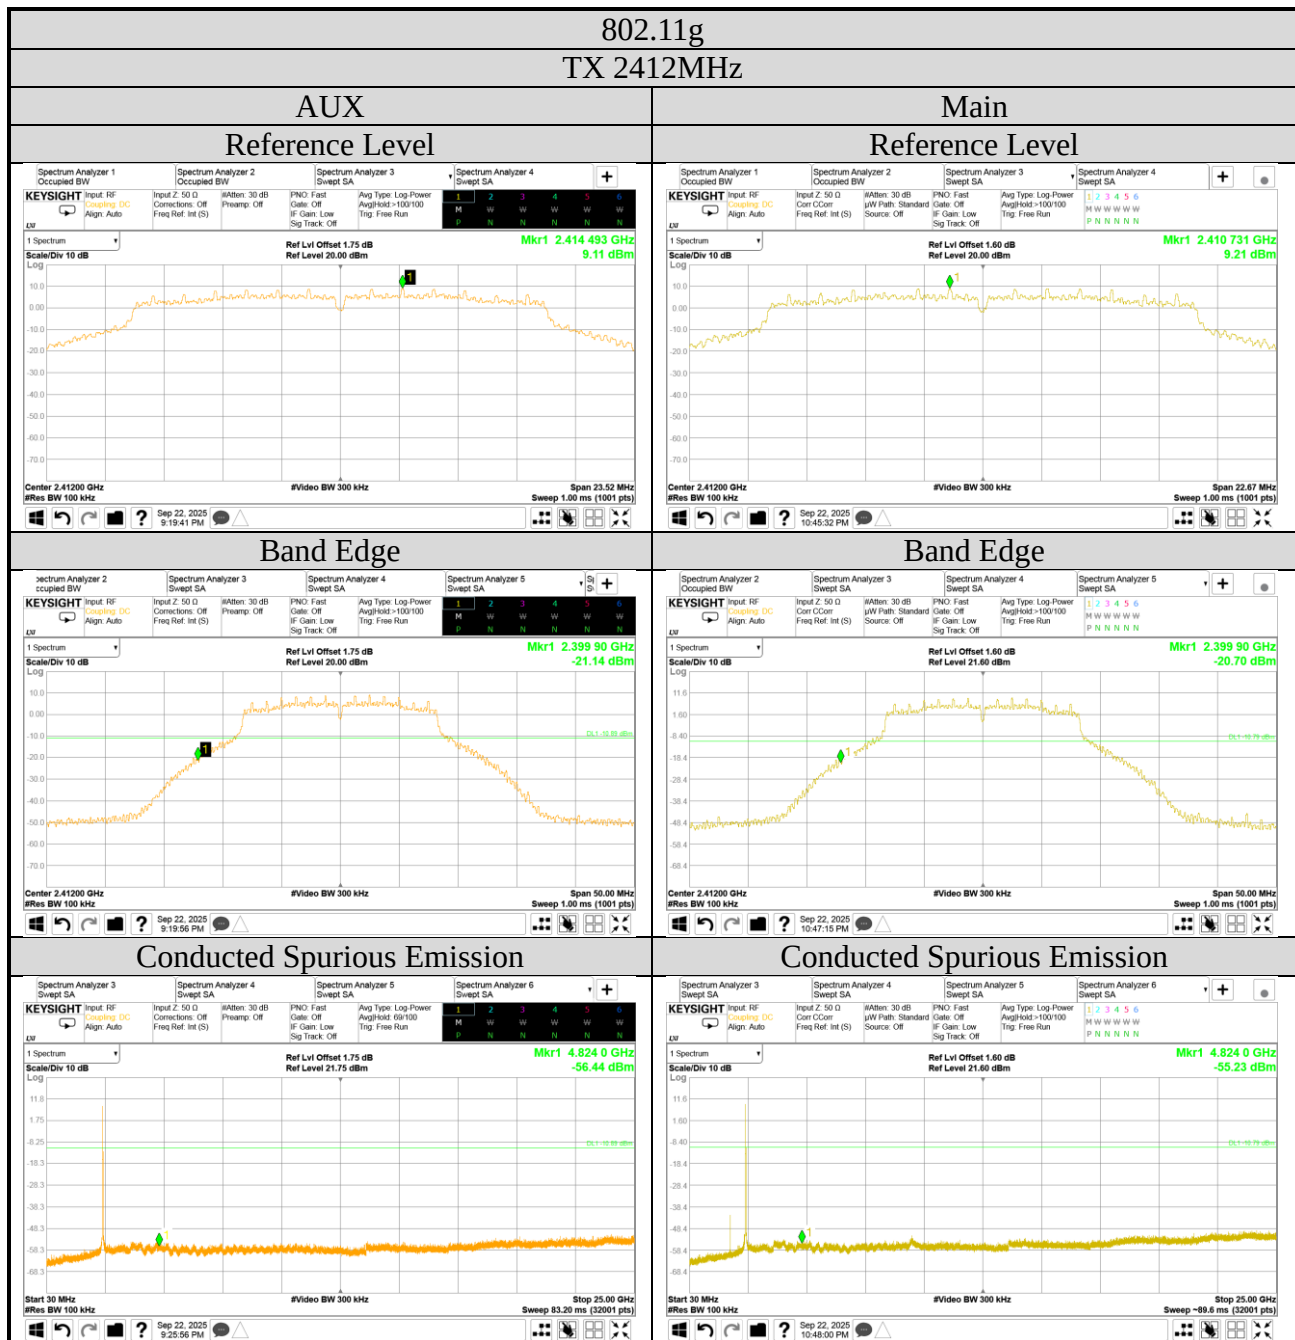


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

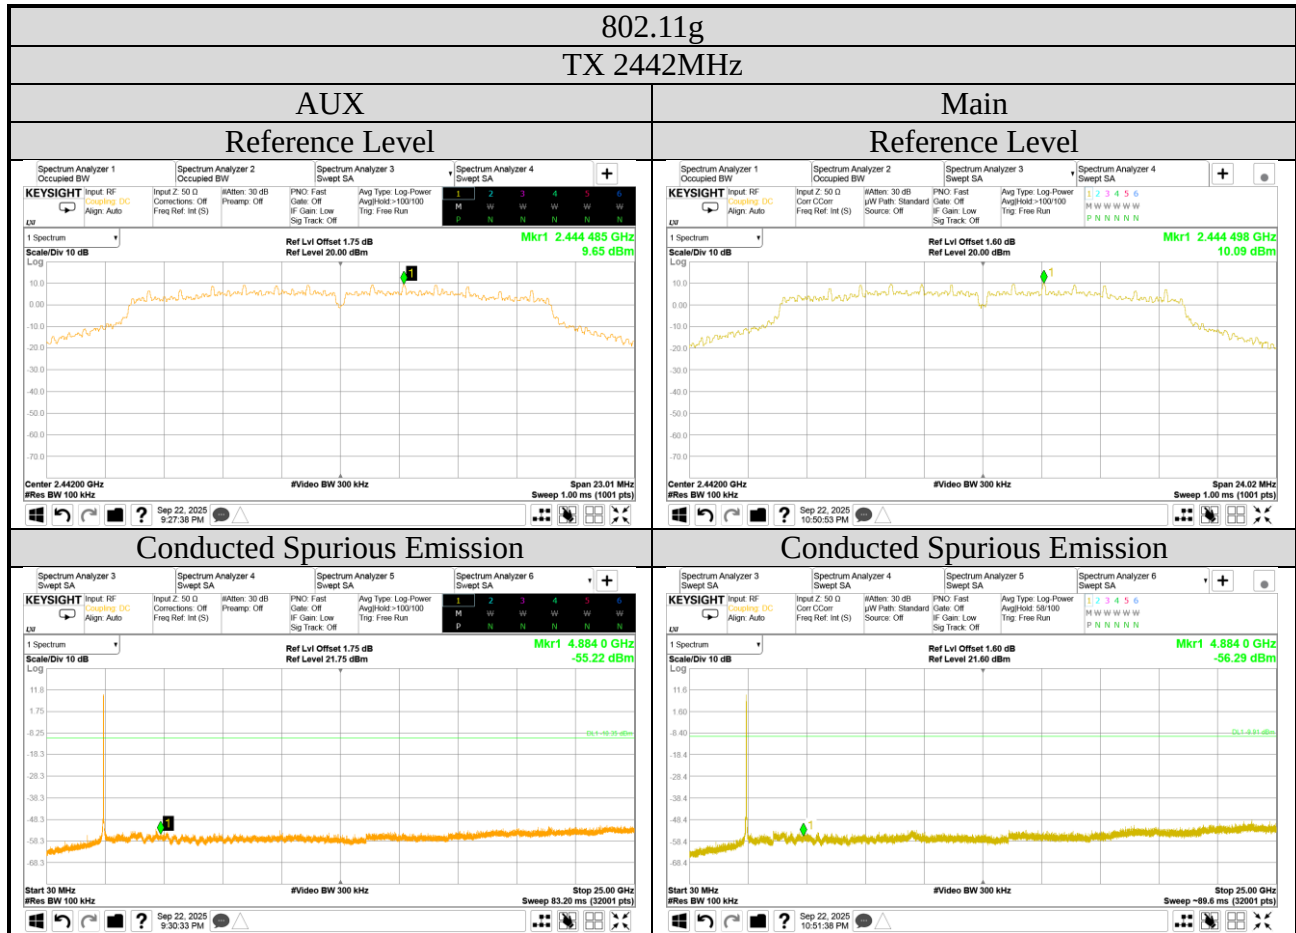


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

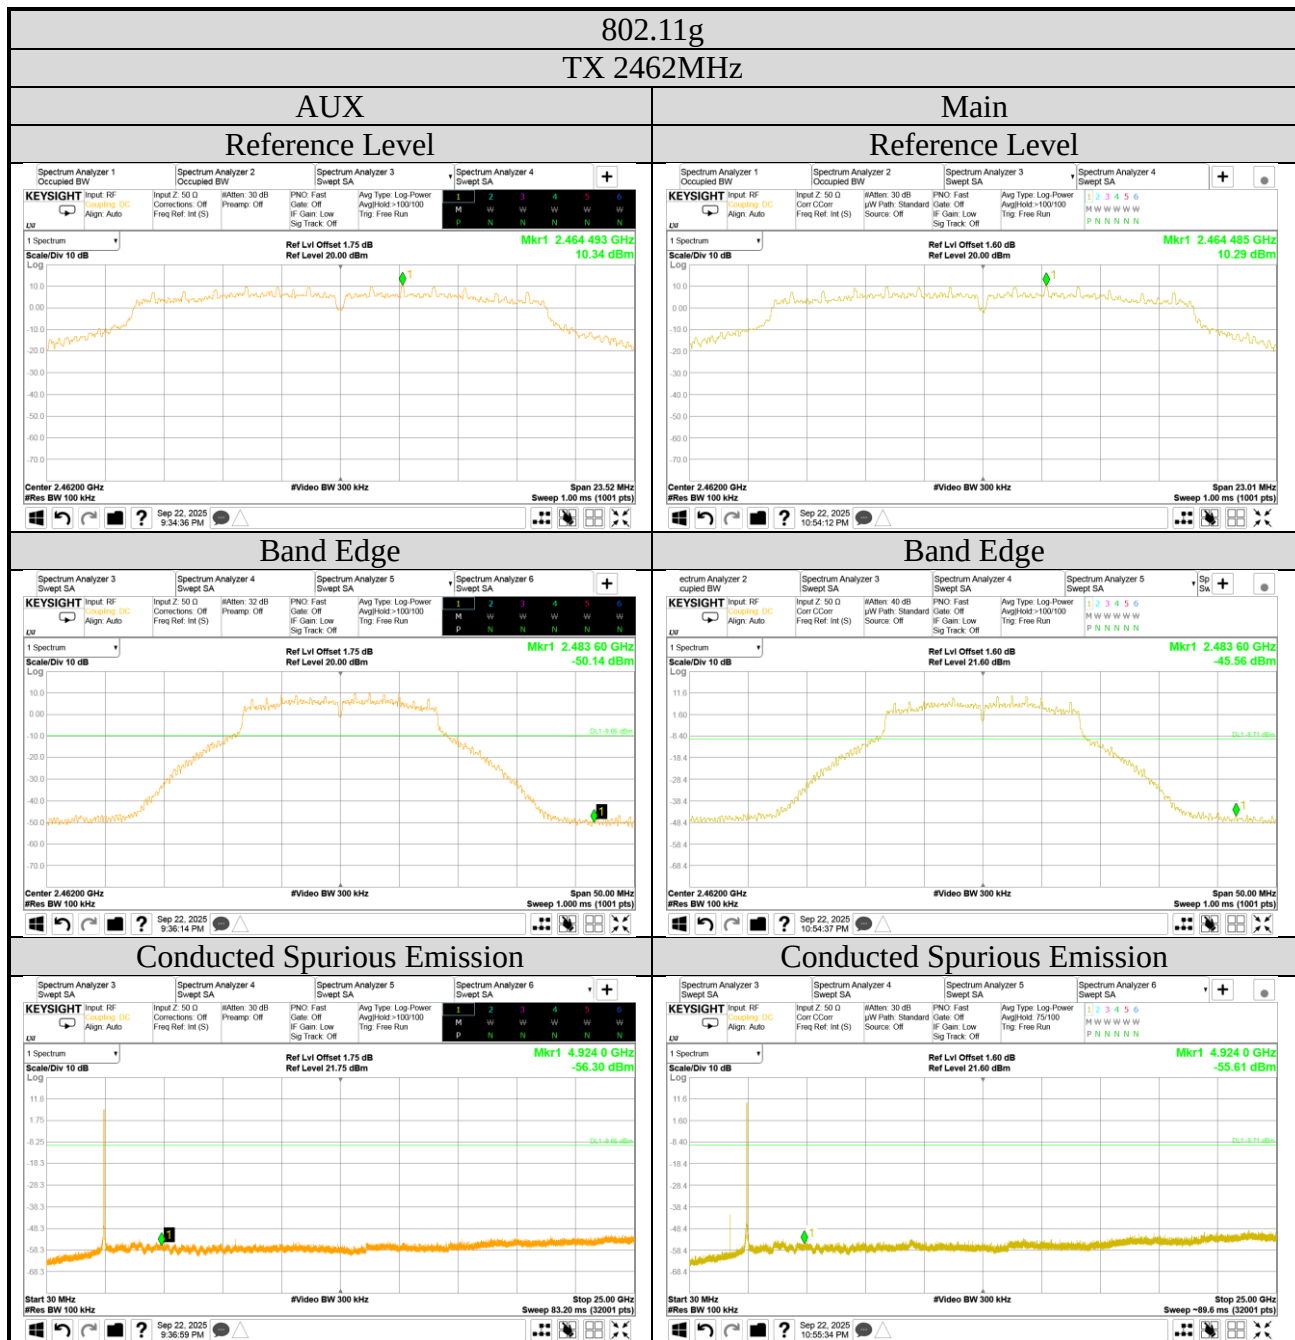


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

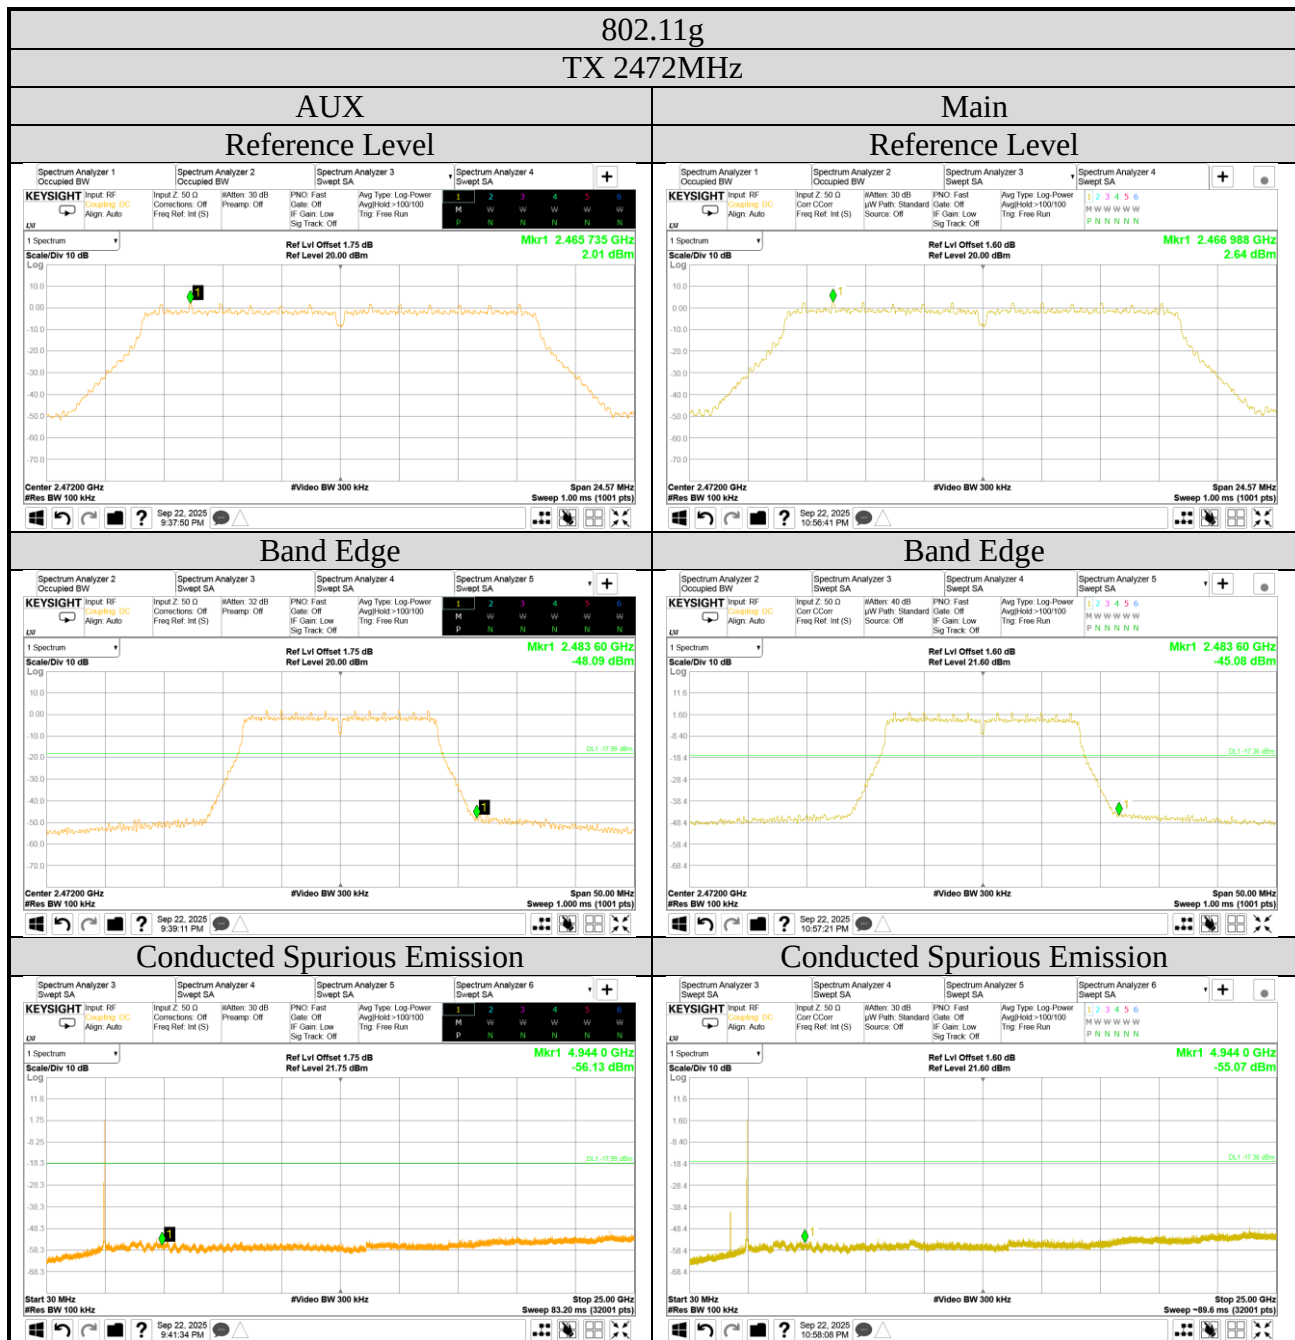


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

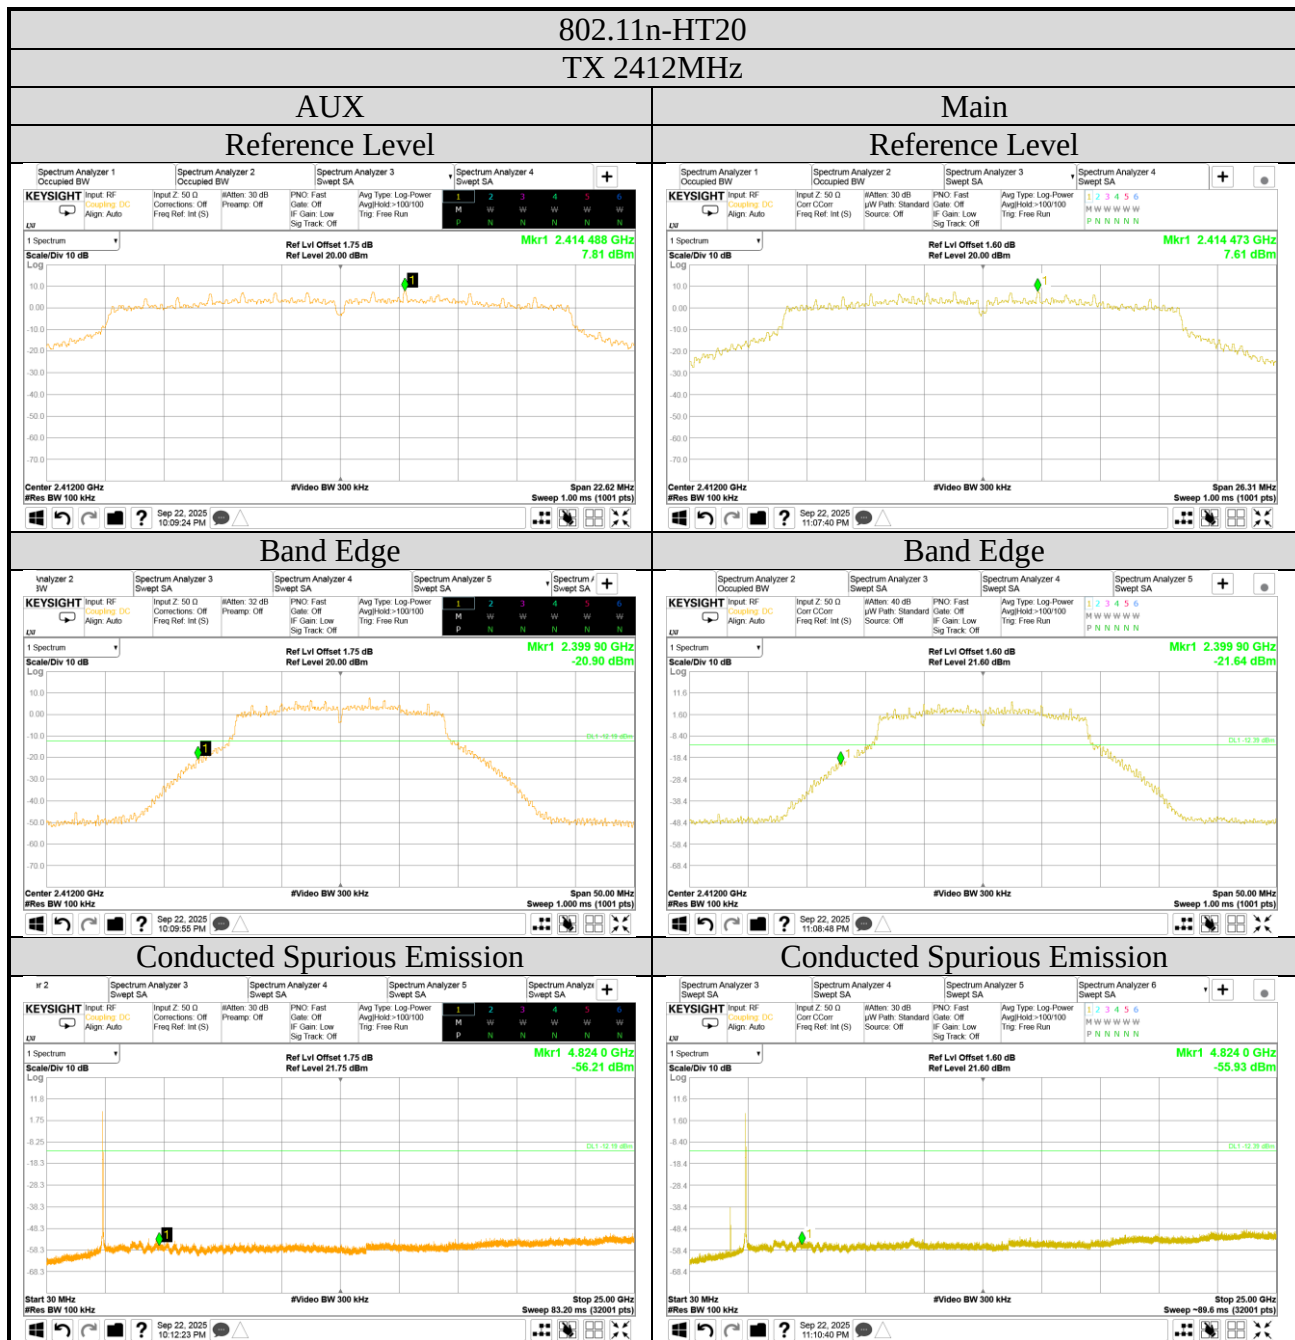


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

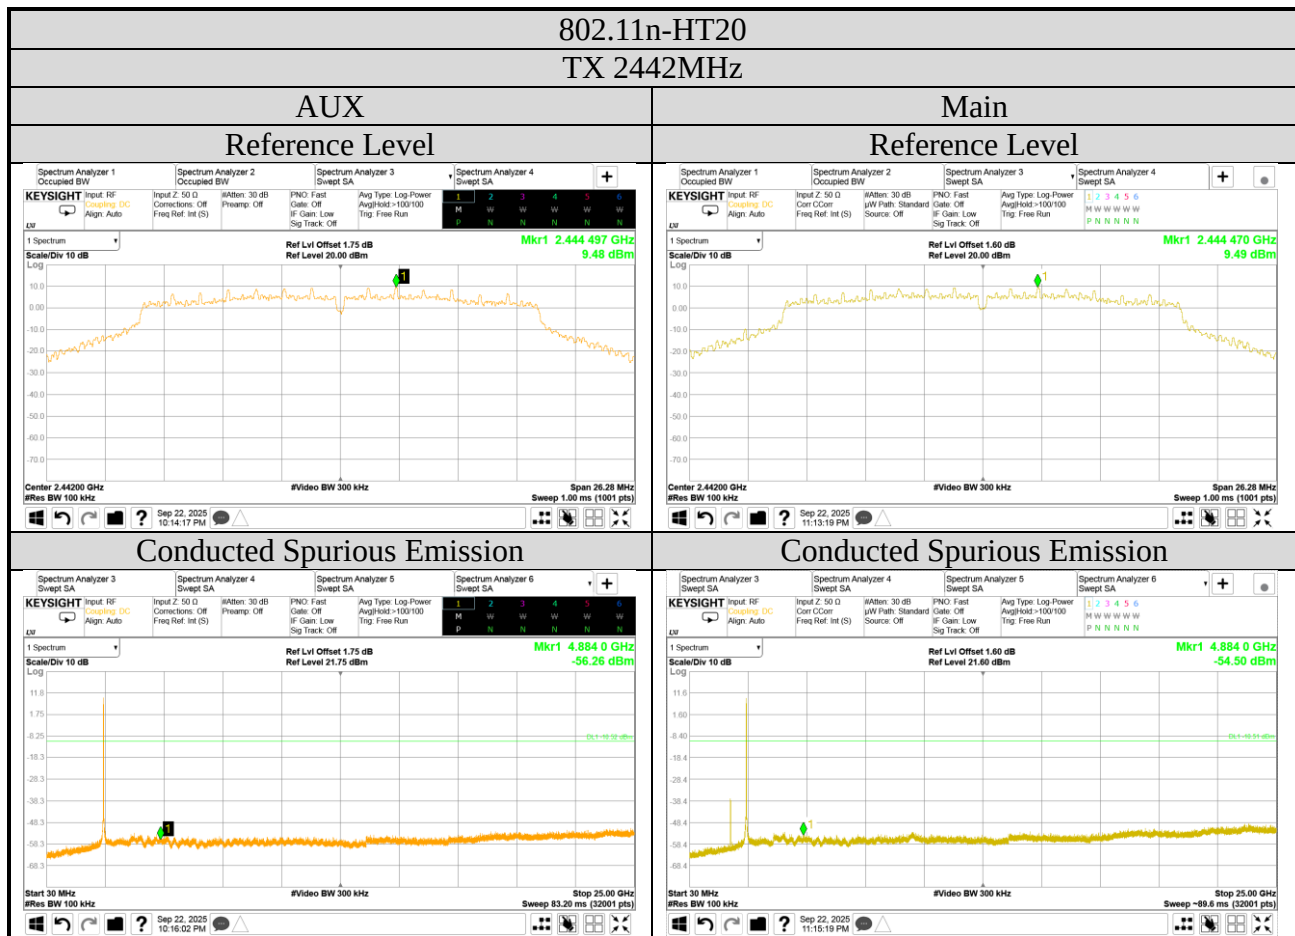


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

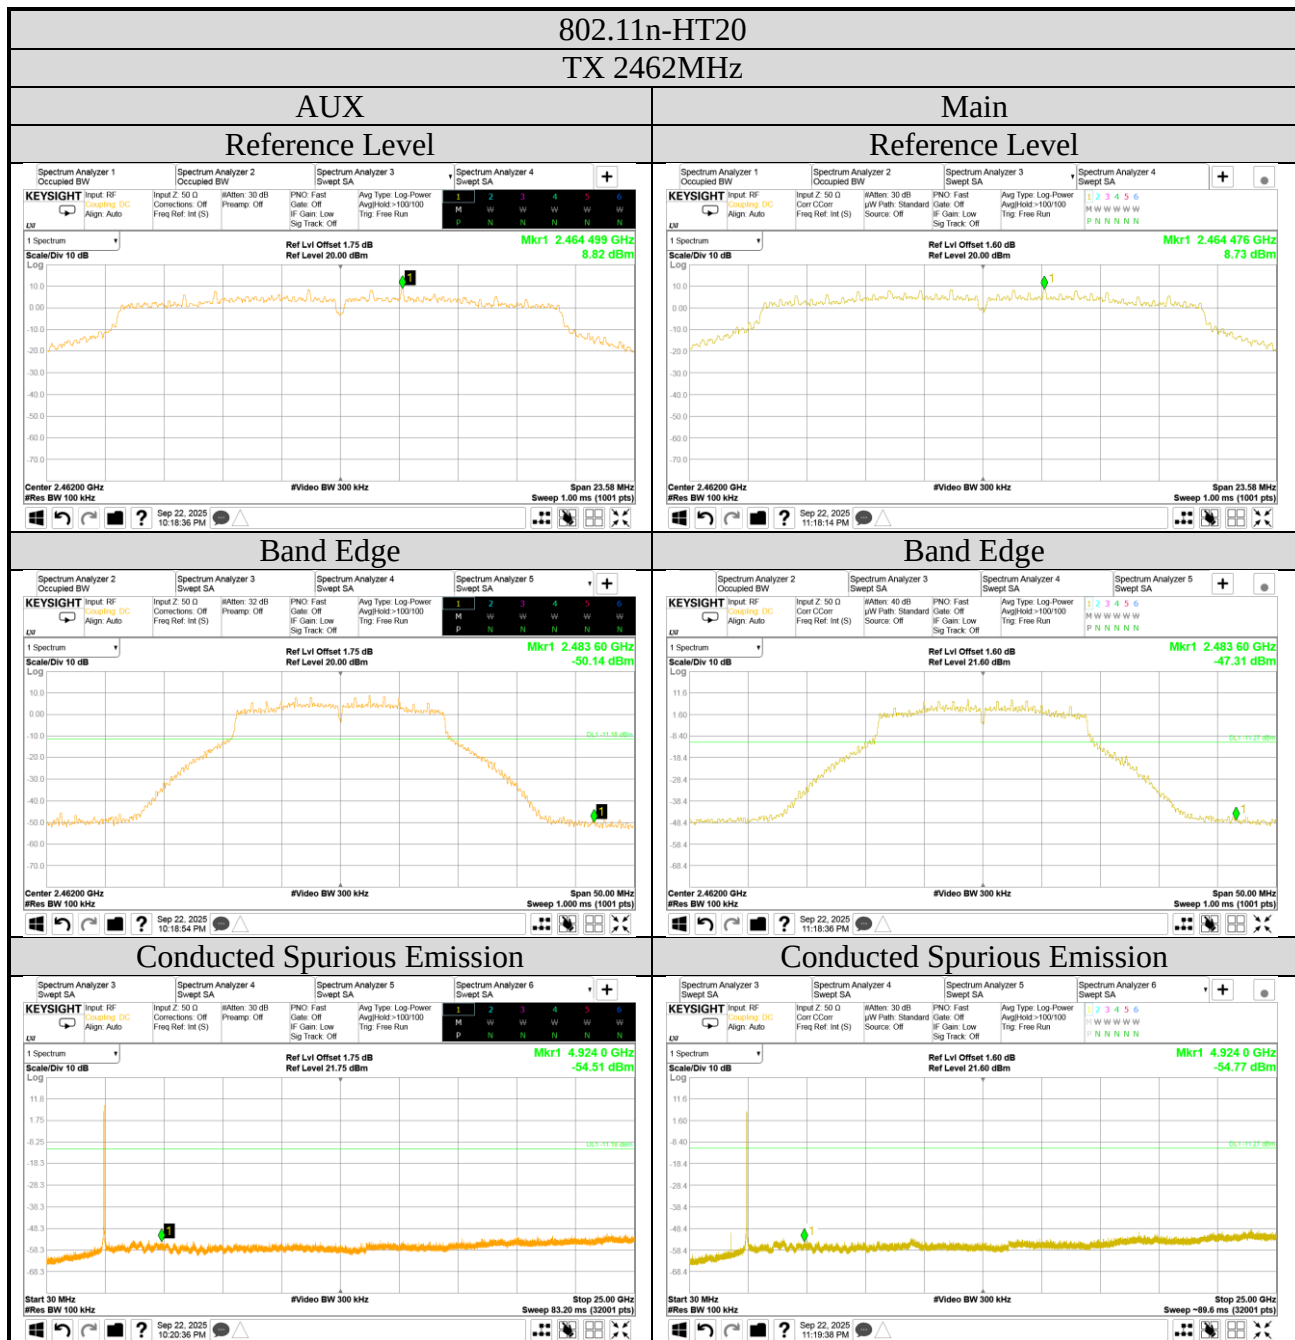


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

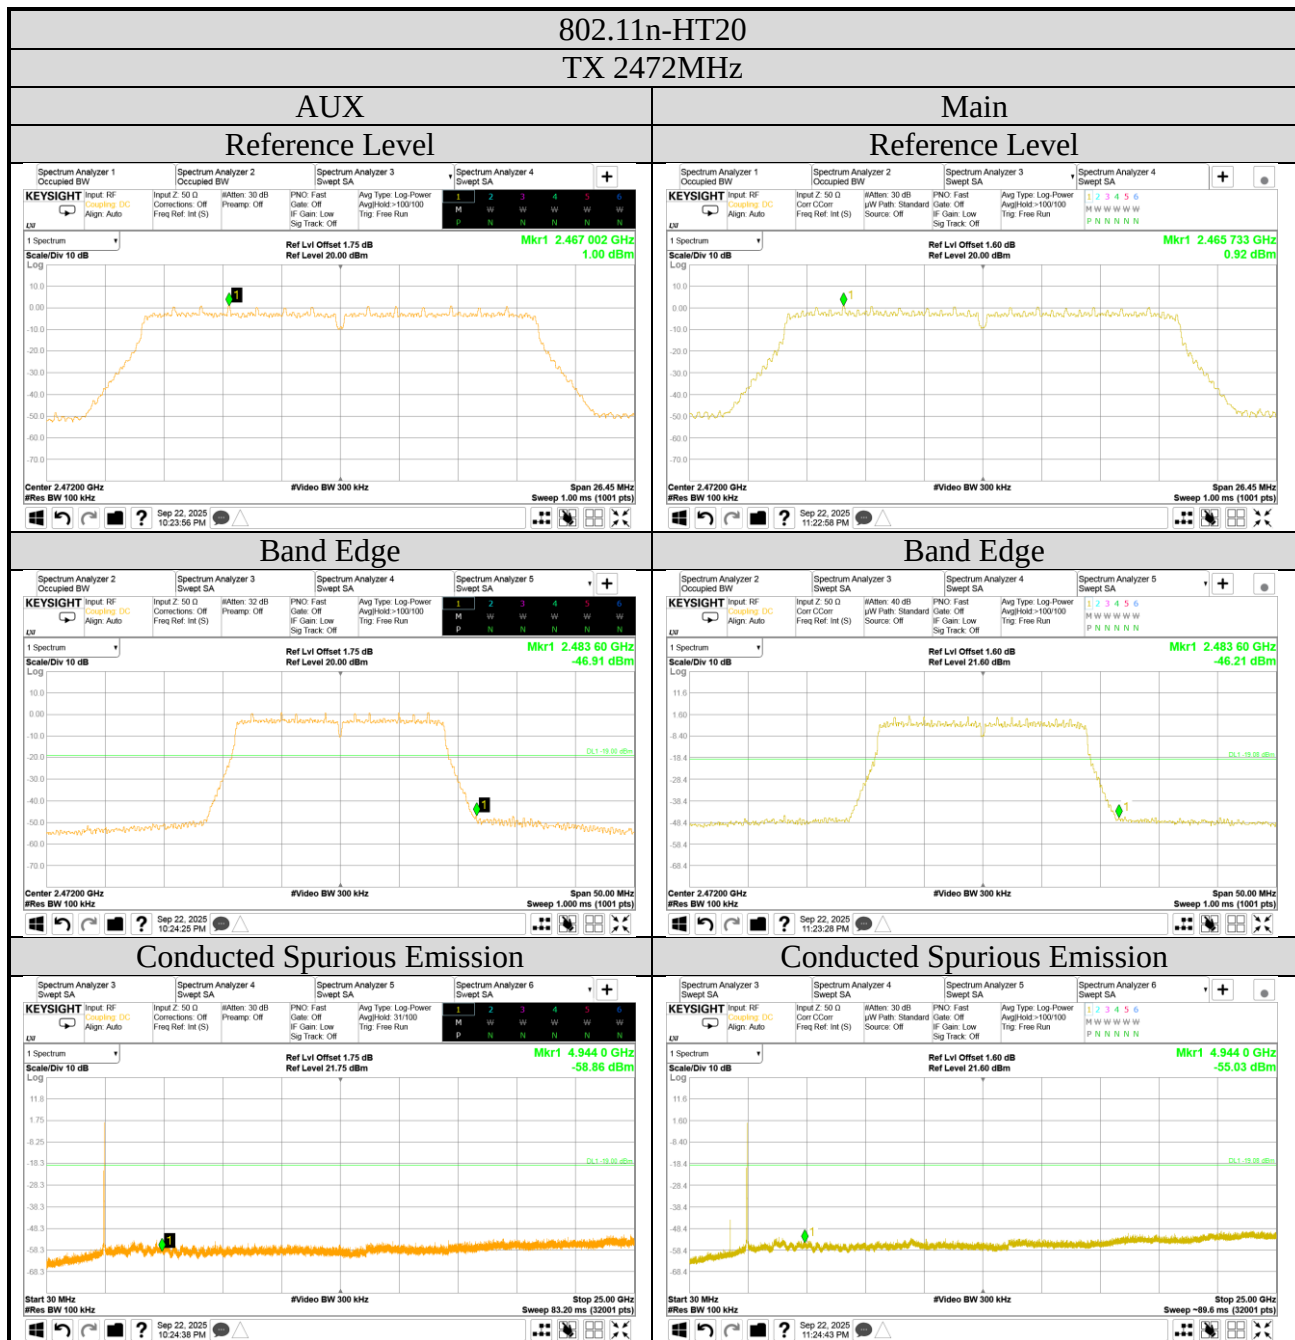


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

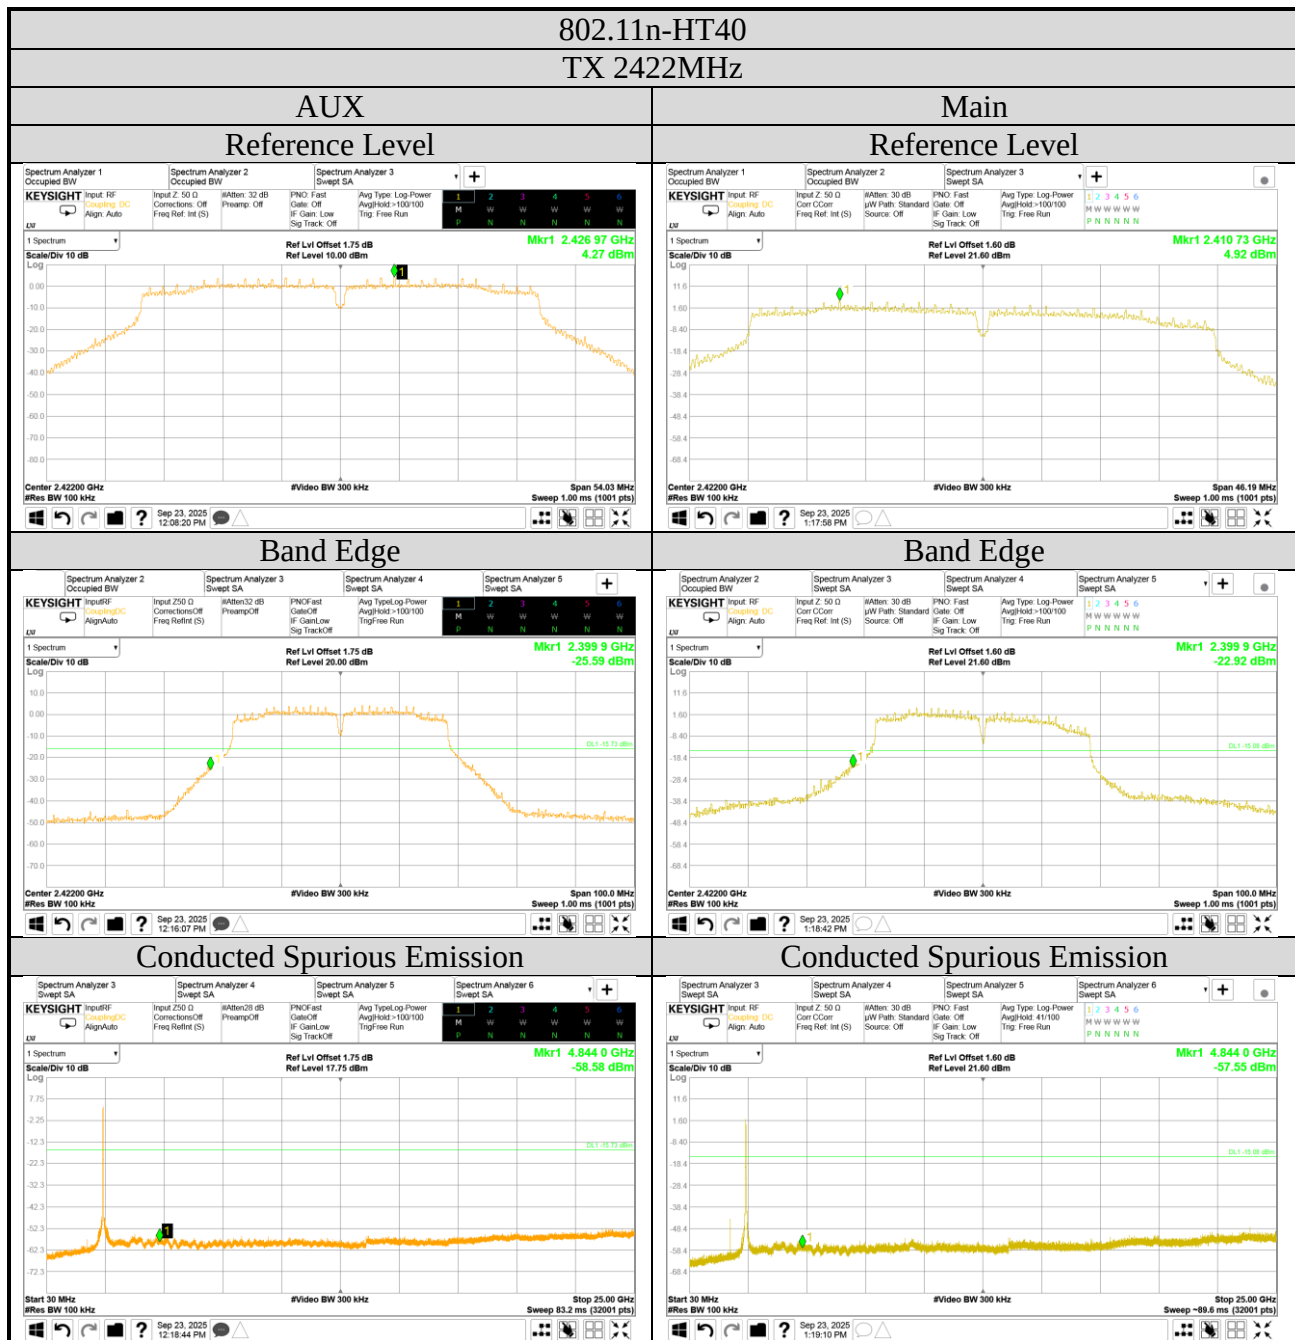


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

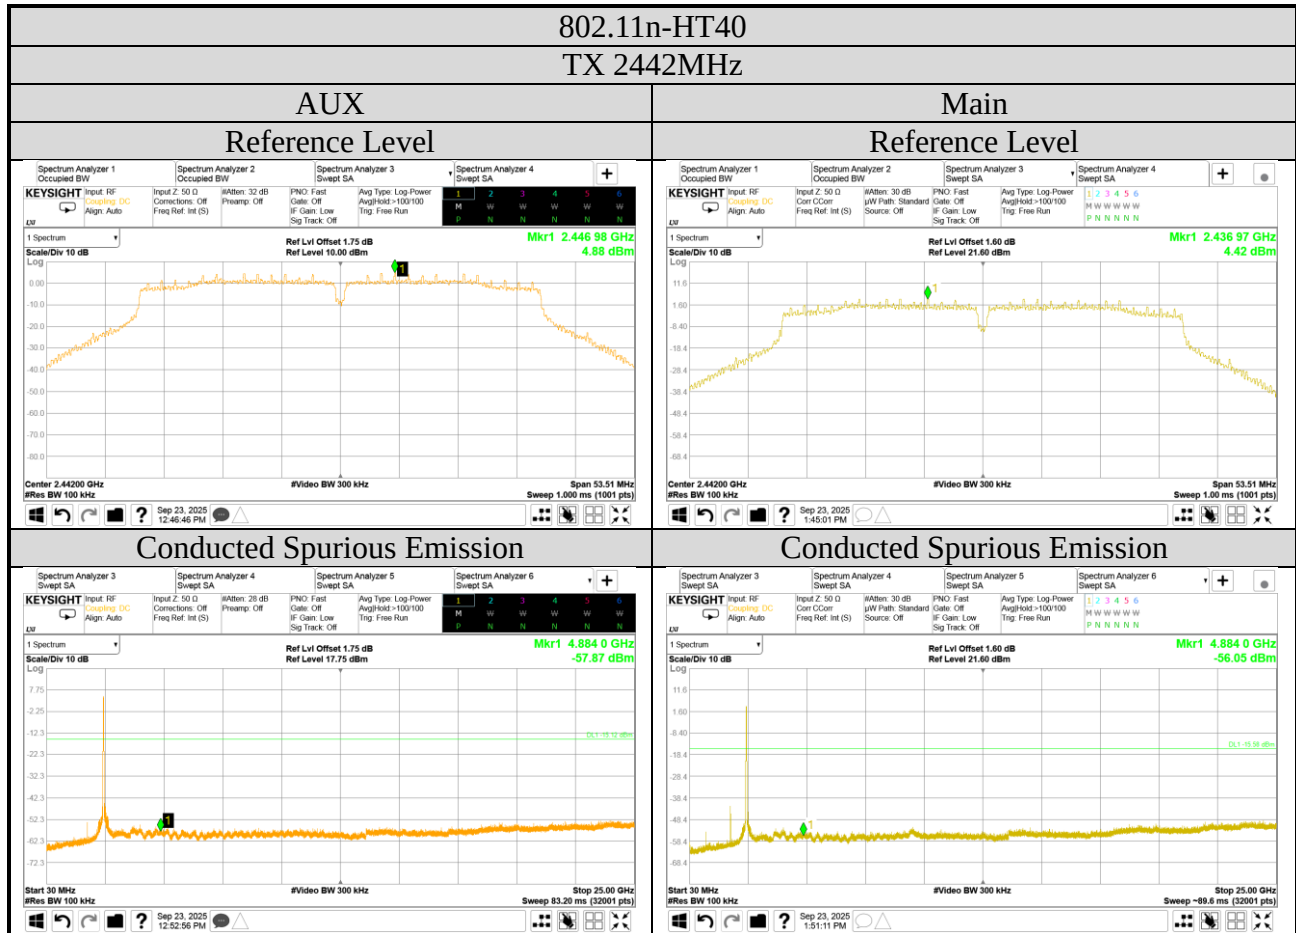

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

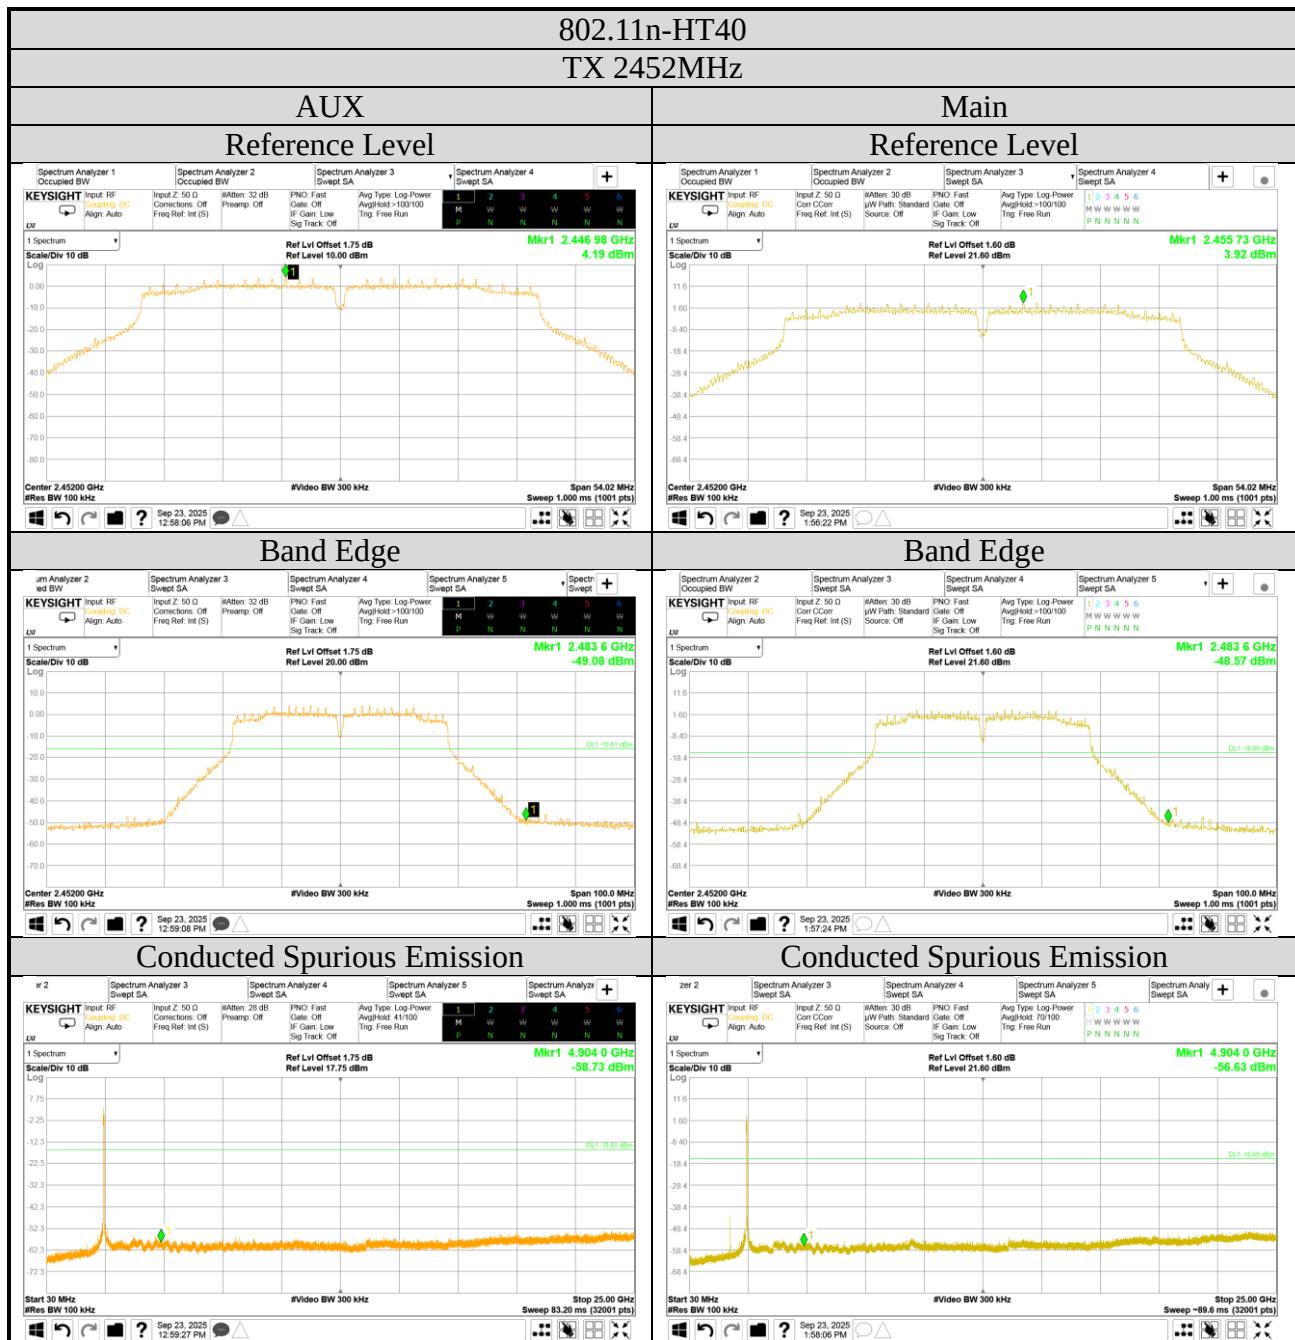

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

