


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

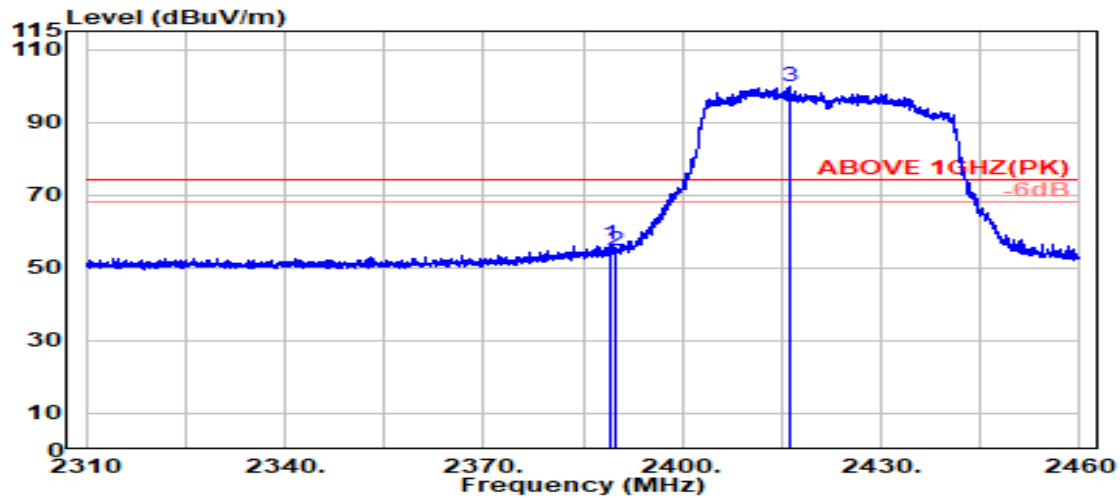

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.20	5.70	39.92	62.53	56.52	74.00	17.48	Peak
2389.800	28.20	5.70	39.92	60.71	54.69	74.00	19.31	Peak
@ 2416.350	28.23	5.74	39.92	105.85	99.90	---	---	Peak

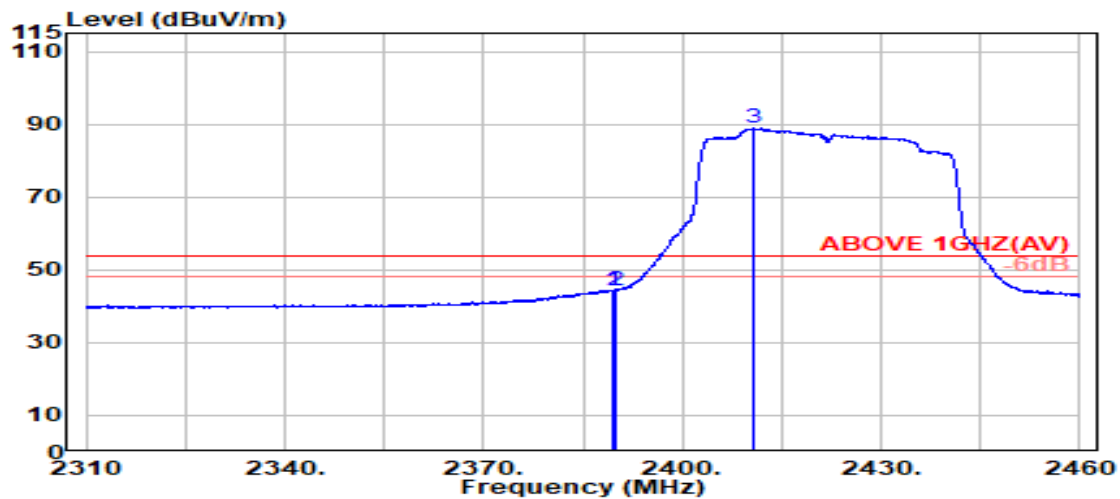

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.20	5.70	39.92	50.41	44.39	54.00	9.61	Average
2389.800	28.20	5.70	39.92	50.44	44.42	54.00	9.58	Average
@ 2410.850	28.22	5.73	39.92	94.88	88.91	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

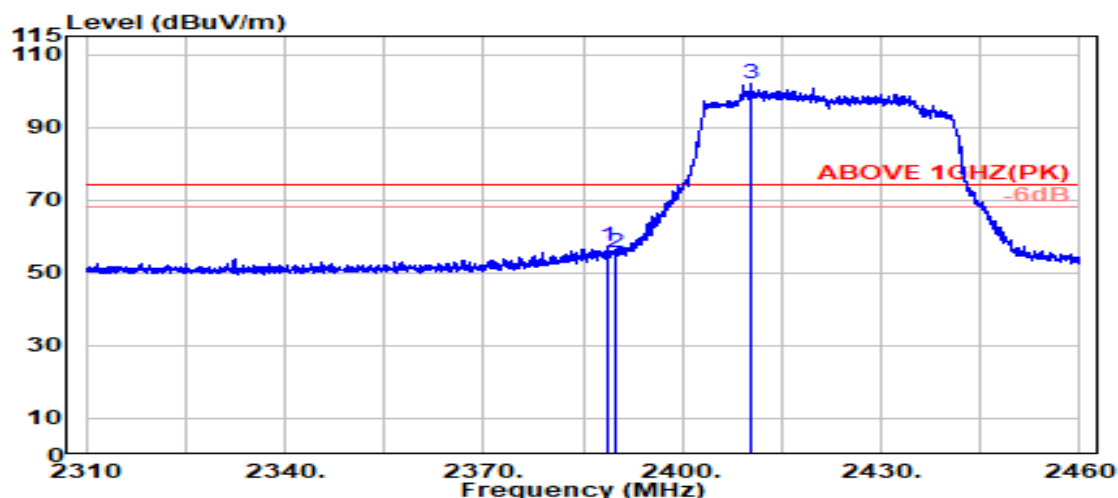

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.700	28.20	5.70	39.92	63.10	57.08	74.00	16.92	Peak
2389.800	28.20	5.70	39.92	61.35	55.33	74.00	18.67	Peak
@ 2410.400	28.22	5.73	39.92	108.01	102.05	---	---	Peak

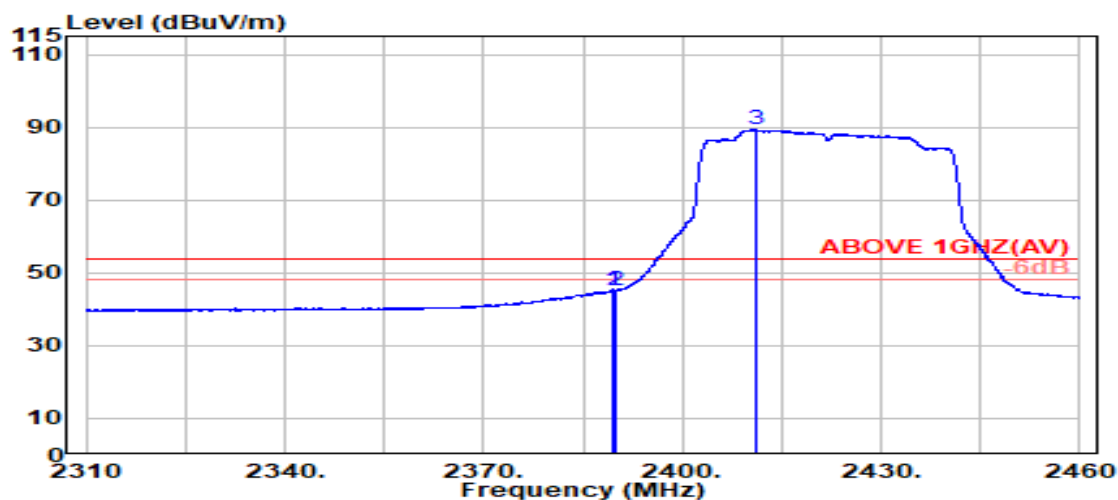

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.92	51.18	45.16	54.00	8.84	Average
2389.800	28.20	5.70	39.92	51.35	45.33	54.00	8.67	Average
@ 2411.200	28.22	5.73	39.92	95.30	89.33	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

File Number: C1M2509090


Report Number: EM-F250634

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

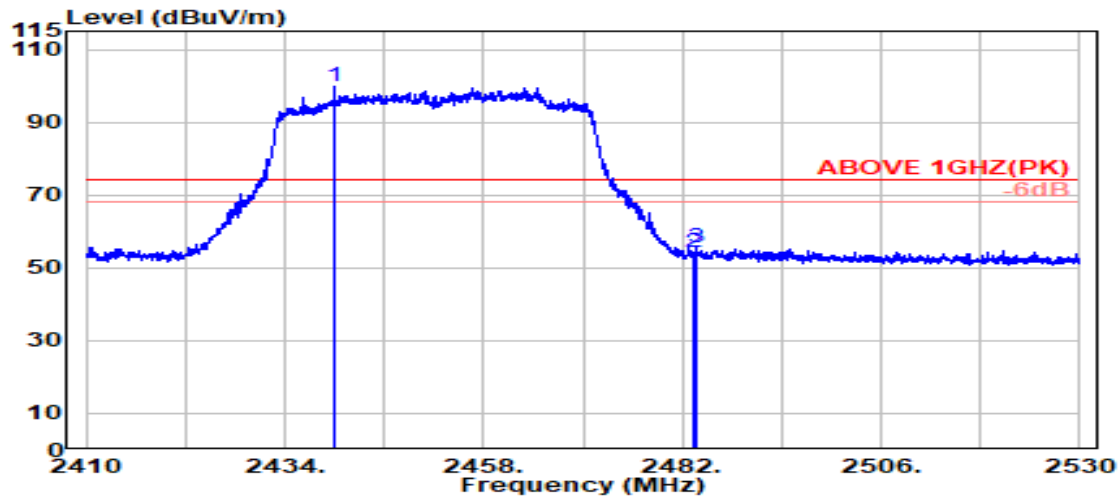

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2440.000	28.28	5.77	39.92	105.47	99.60	---	---	Peak
	2483.500	28.43	5.83	39.92	59.84	54.18	74.00	19.82	Peak
	2483.700	28.44	5.83	39.92	61.20	55.55	74.00	18.45	Peak

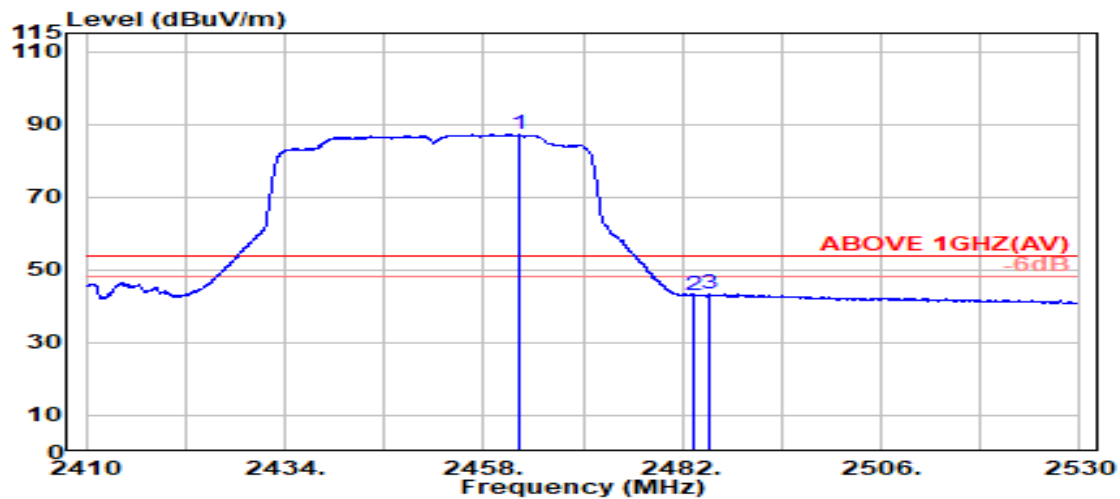

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2462.400	28.35	5.80	39.92	92.93	87.17	---	---	Average
	2483.500	28.43	5.83	39.92	48.55	42.89	54.00	11.11	Average
	2485.250	28.44	5.83	39.92	48.91	43.26	54.00	10.74	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

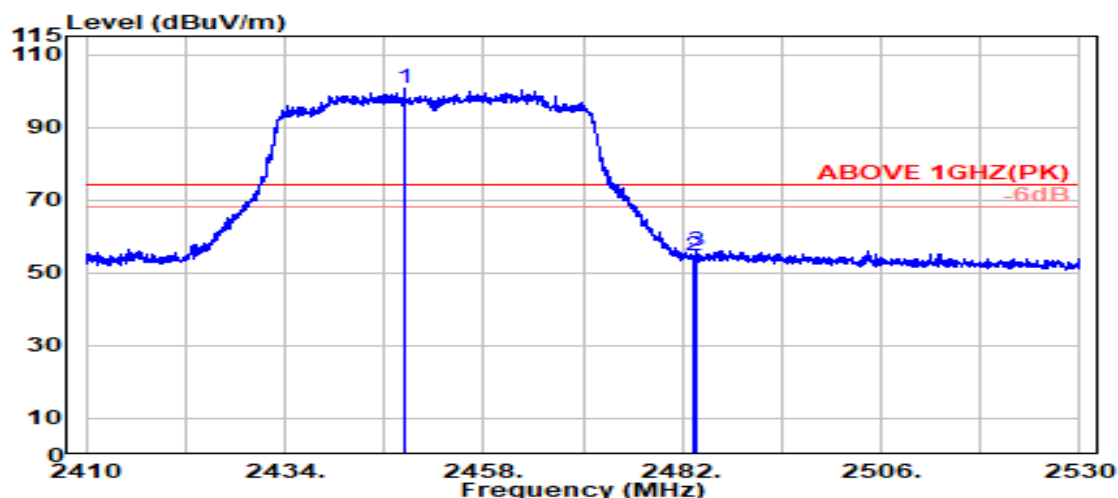

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2448.500	28.30	5.78	39.92	106.55	100.71	---	---	Peak
	2483.500	28.43	5.83	39.92	60.34	54.69	74.00	19.31	Peak
	2483.700	28.44	5.83	39.92	61.81	56.15	74.00	17.85	Peak

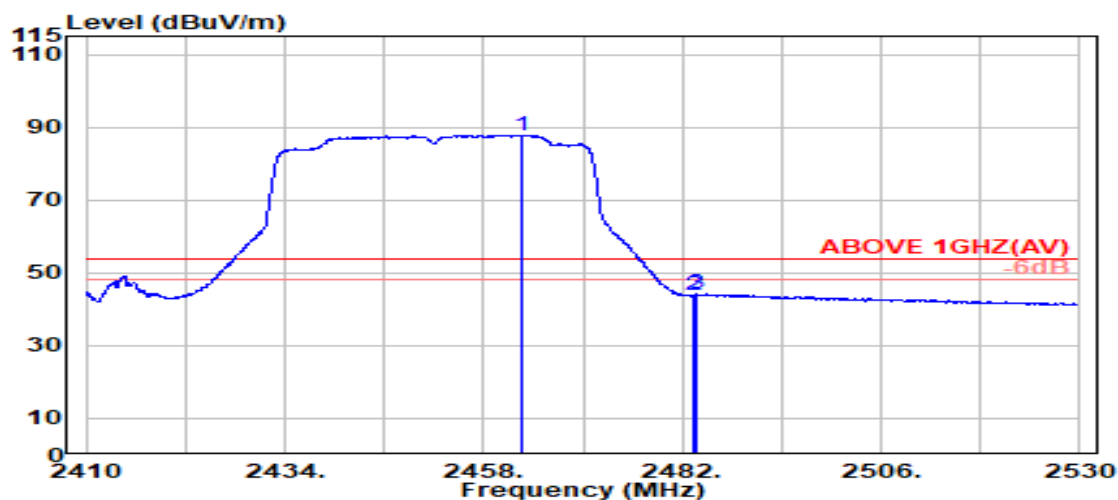

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2462.500	28.35	5.80	39.92	93.64	87.87	---	---	Average
	2483.500	28.43	5.83	39.92	49.61	43.95	54.00	10.05	Average
	2483.700	28.44	5.83	39.92	49.72	44.06	54.00	9.94	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

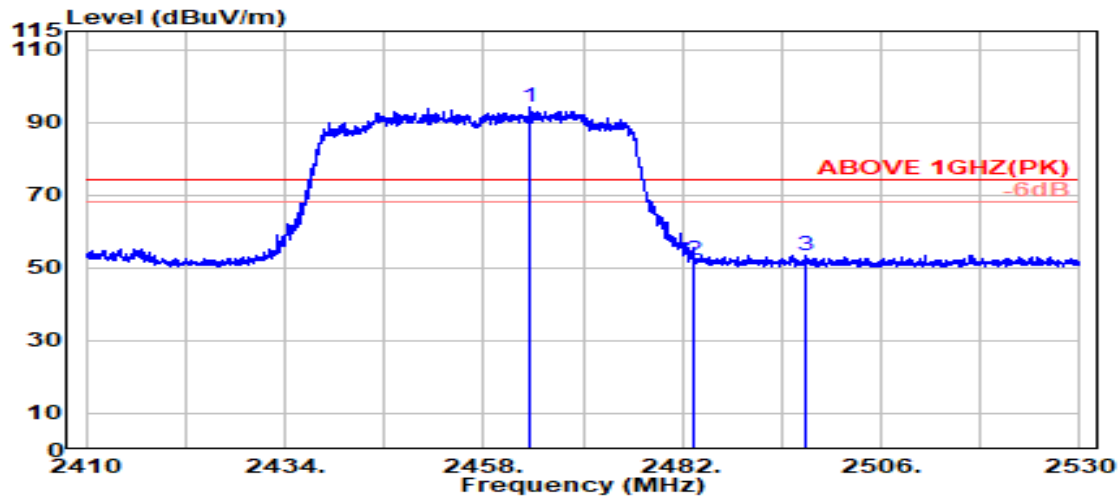

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.650	28.36	5.80	39.92	99.76	94.00	---	---	Peak
2483.500	28.43	5.83	39.92	57.72	52.06	74.00	21.94	Peak
2496.950	28.49	5.85	39.92	59.17	53.58	74.00	20.42	Peak

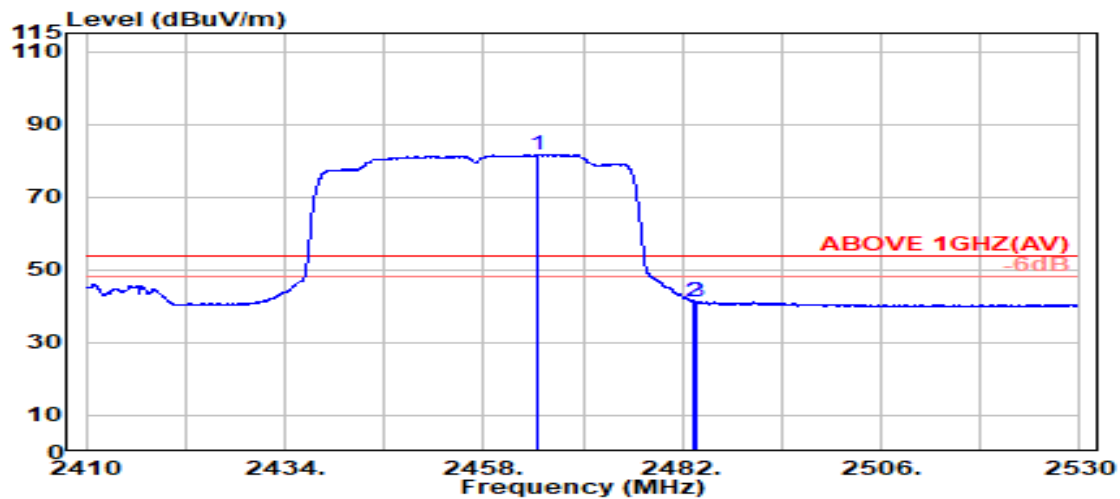

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	28.36	5.80	39.92	87.32	81.57	---	---	Average
2483.500	28.43	5.83	39.92	47.02	41.36	54.00	12.64	Average
2483.800	28.44	5.83	39.92	46.97	41.32	54.00	12.68	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

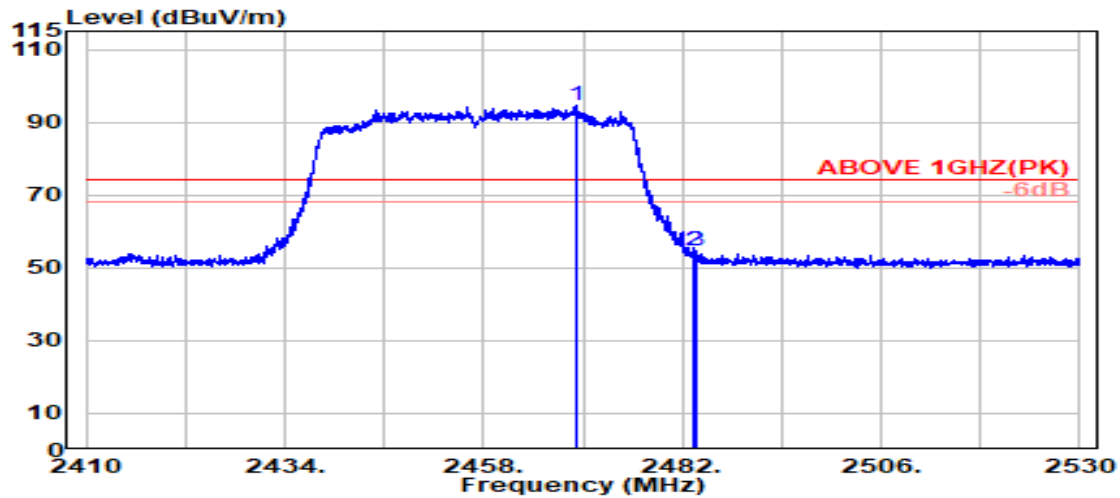

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.300	28.38	5.81	39.92	100.25	94.51	---	---	Peak
2483.500	28.43	5.83	39.92	60.54	54.89	74.00	19.11	Peak
2483.750	28.44	5.83	39.92	60.55	54.89	74.00	19.11	Peak

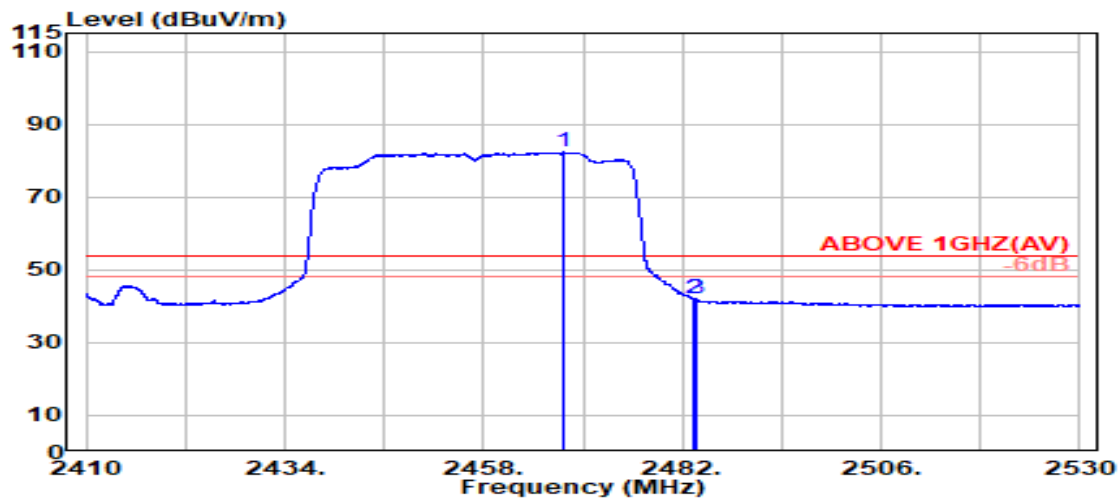

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.600	28.37	5.81	39.92	88.04	82.30	---	---	Average
2483.500	28.43	5.83	39.92	47.55	41.89	54.00	12.11	Average
2483.700	28.44	5.83	39.92	47.56	41.91	54.00	12.09	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

File Number: C1M2509090

Report Number: EM-F250634

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

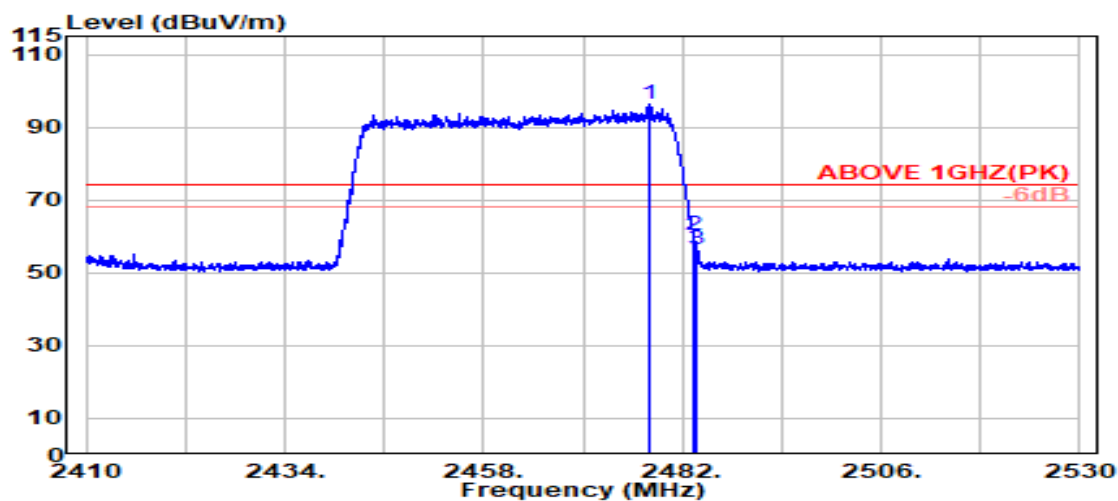

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2478.150	28.41	5.82	39.92	102.06	96.37	---	---	Peak
	2483.500	28.43	5.83	39.92	65.96	60.31	74.00	13.69	Peak
	2483.750	28.44	5.83	39.92	62.29	56.63	74.00	17.37	Peak

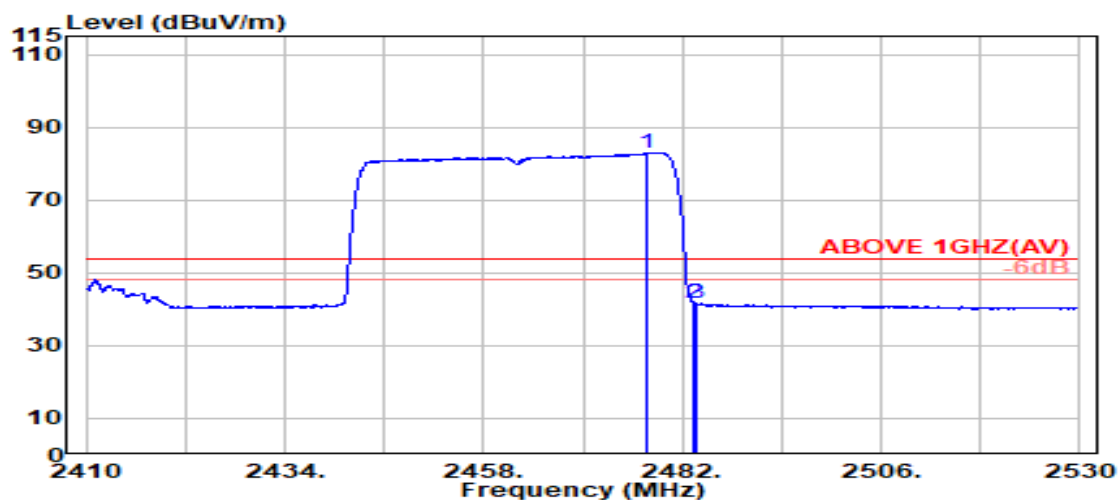

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2477.850	28.41	5.82	39.92	88.69	83.00	---	---	Average
	2483.500	28.43	5.83	39.92	47.21	41.55	54.00	12.45	Average
	2483.700	28.44	5.83	39.92	47.44	41.78	54.00	12.22	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

File Number: C1M2509090

Report Number: EM-F250634

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

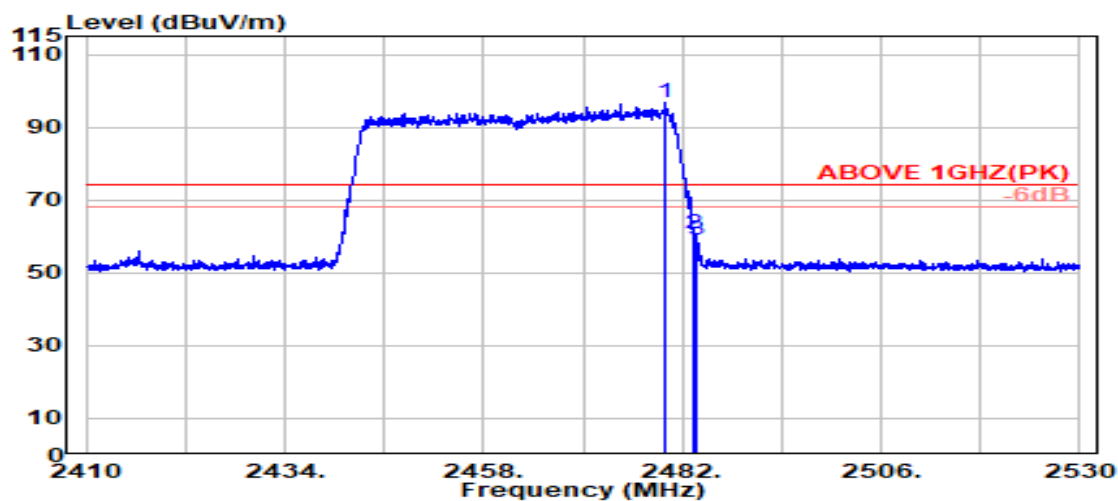

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.850	28.42	5.82	39.92	102.25	96.57	---	---	Peak
	2483.500	28.43	5.83	39.92	66.33	60.67	74.00	13.33	Peak
	2483.800	28.44	5.83	39.92	64.71	59.05	74.00	14.95	Peak

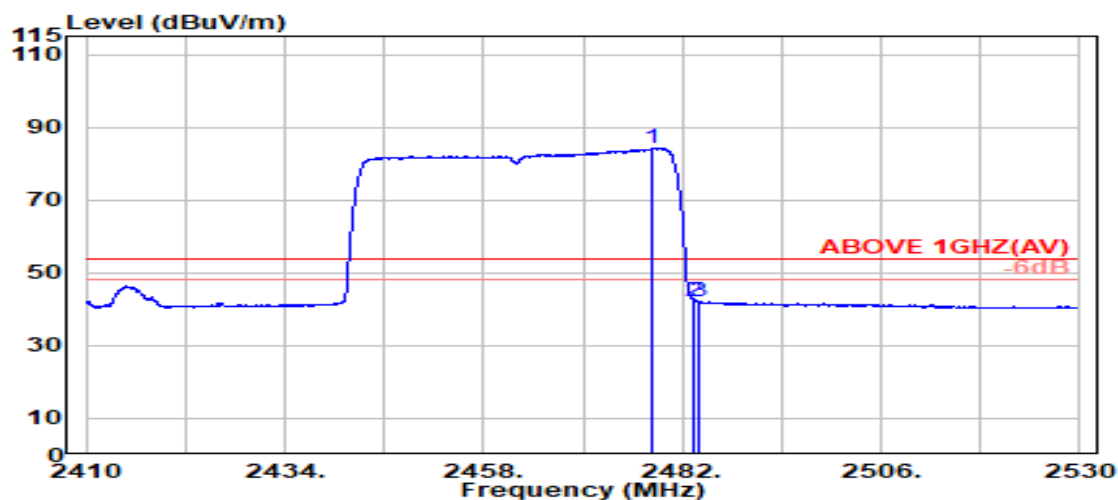

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2478.300	28.41	5.82	39.92	89.91	84.22	---	---	Average
	2483.500	28.43	5.83	39.92	47.85	42.20	54.00	11.80	Average
	2484.100	28.44	5.83	39.92	47.84	42.18	54.00	11.82	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

File Number: C1M2509090

Report Number: EM-F250634

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

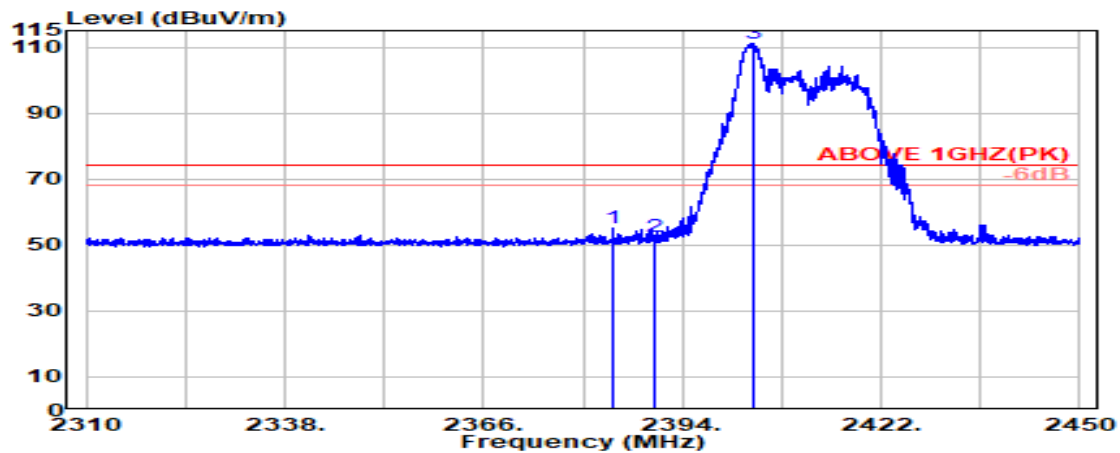

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2384.150	28.20	5.69	39.92	61.23	55.21	74.00	18.79	Peak
2390.000	28.20	5.70	39.92	58.43	52.41	74.00	21.59	Peak
@ 2404.100	28.21	5.72	39.92	117.04	111.05	---	---	Peak

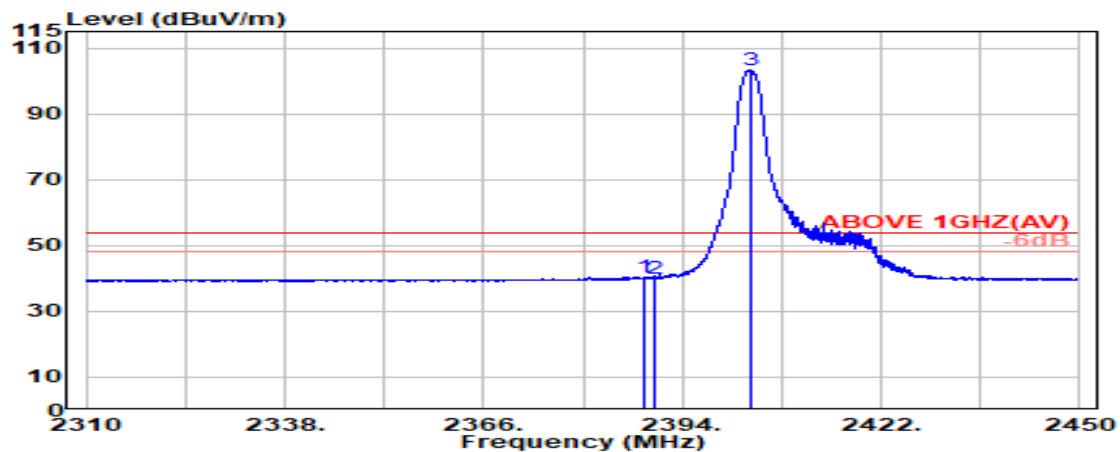

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.800	28.20	5.70	39.92	46.55	40.53	54.00	13.47	Average
2390.000	28.20	5.70	39.92	46.04	40.02	54.00	13.98	Average
@ 2403.500	28.21	5.72	39.92	109.38	103.39	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

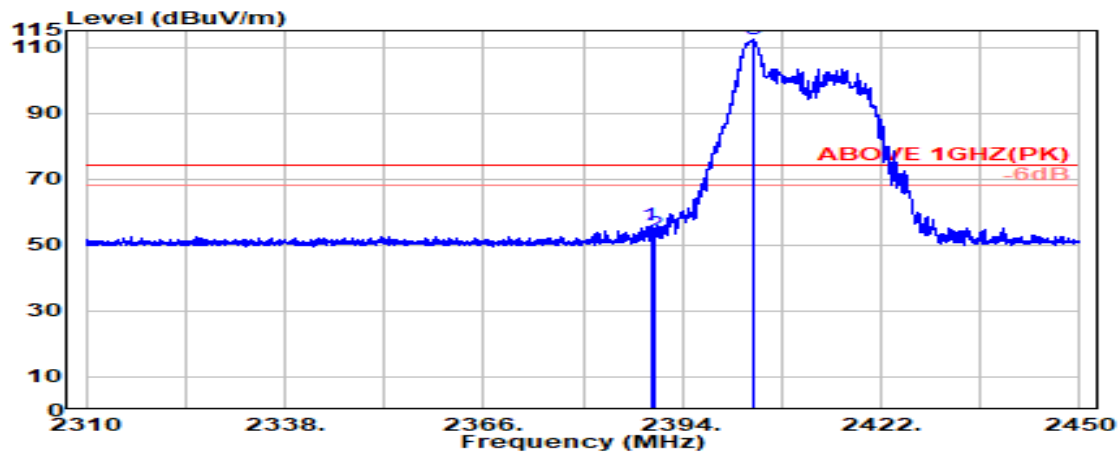

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.20	5.70	39.92	62.20	56.19	74.00	17.81	Peak
2390.000	28.20	5.70	39.92	59.45	53.43	74.00	20.57	Peak
@ 2404.050	28.21	5.72	39.92	118.26	112.27	---	---	Peak

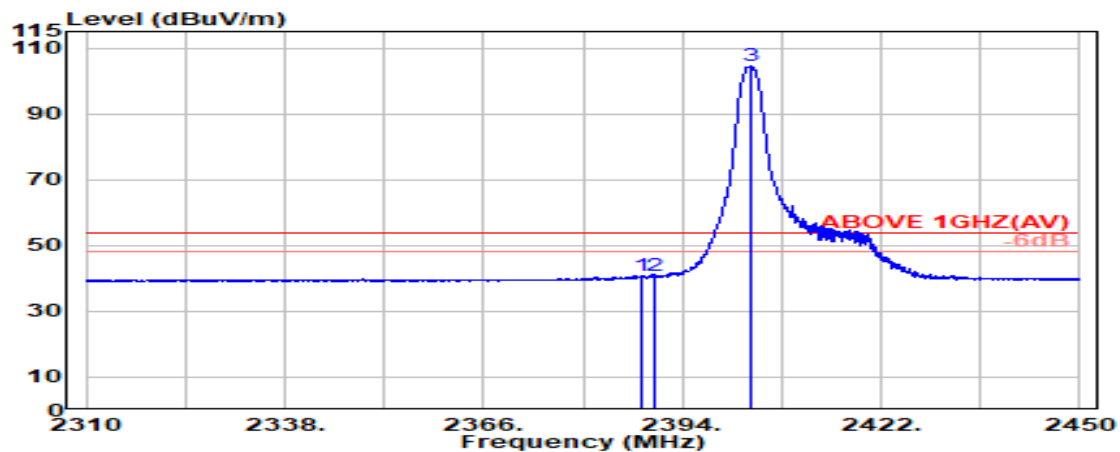

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.400	28.20	5.70	39.92	46.82	40.80	54.00	13.20	Average
2390.000	28.20	5.70	39.92	46.77	40.75	54.00	13.25	Average
@ 2403.600	28.21	5.72	39.92	110.52	104.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	26/8		

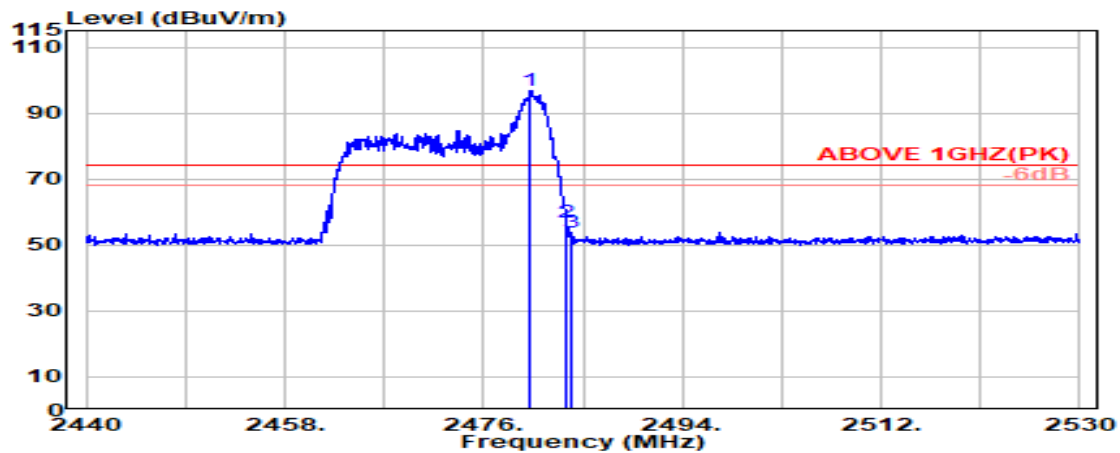

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.250	28.42	5.82	39.92	102.37	96.70	---	---	Peak
2483.500	28.43	5.83	39.92	62.72	57.06	74.00	16.94	Peak
2483.850	28.44	5.83	39.92	59.38	53.72	74.00	20.28	Peak

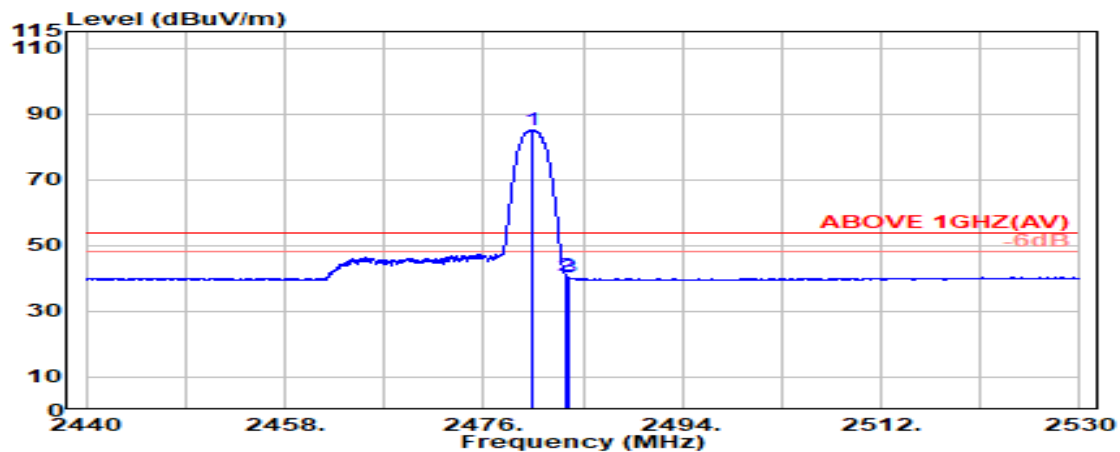

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.450	28.42	5.82	39.92	90.87	85.20	---	---	Average
2483.500	28.43	5.83	39.92	46.33	40.68	54.00	13.32	Average
2483.750	28.44	5.83	39.92	45.96	40.30	54.00	13.70	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	26/8		

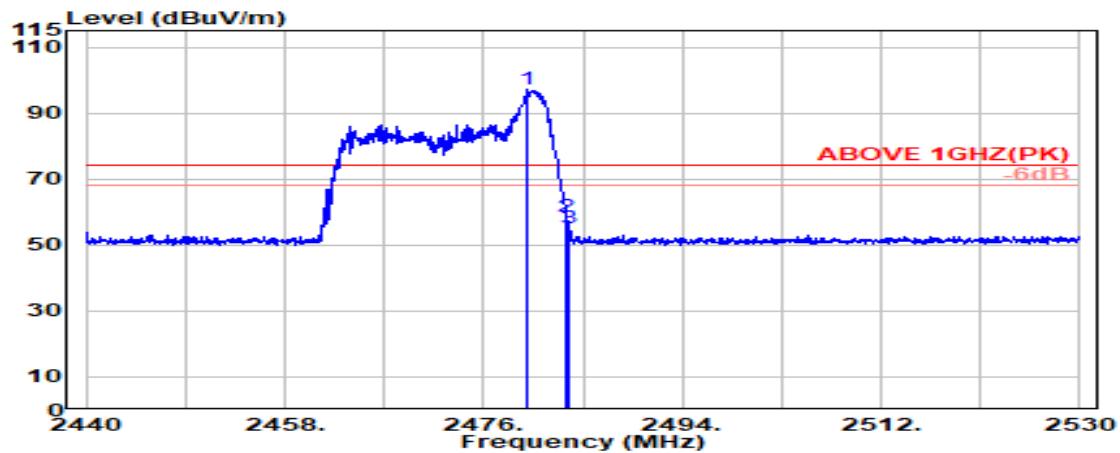

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.950	28.42	5.82	39.92	103.02	97.35	---	---	Peak
2483.500	28.43	5.83	39.92	64.28	58.62	74.00	15.38	Peak
2483.700	28.44	5.83	39.92	60.86	55.20	74.00	18.80	Peak

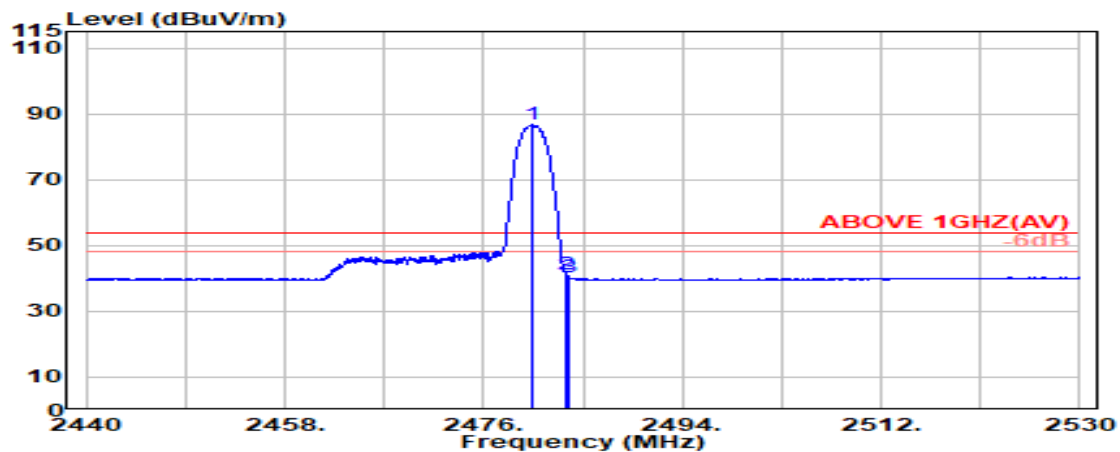

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.450	28.42	5.82	39.92	92.28	86.61	---	---	Average
2483.500	28.43	5.83	39.92	46.68	41.02	54.00	12.98	Average
2483.700	28.44	5.83	39.92	45.94	40.28	54.00	13.72	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

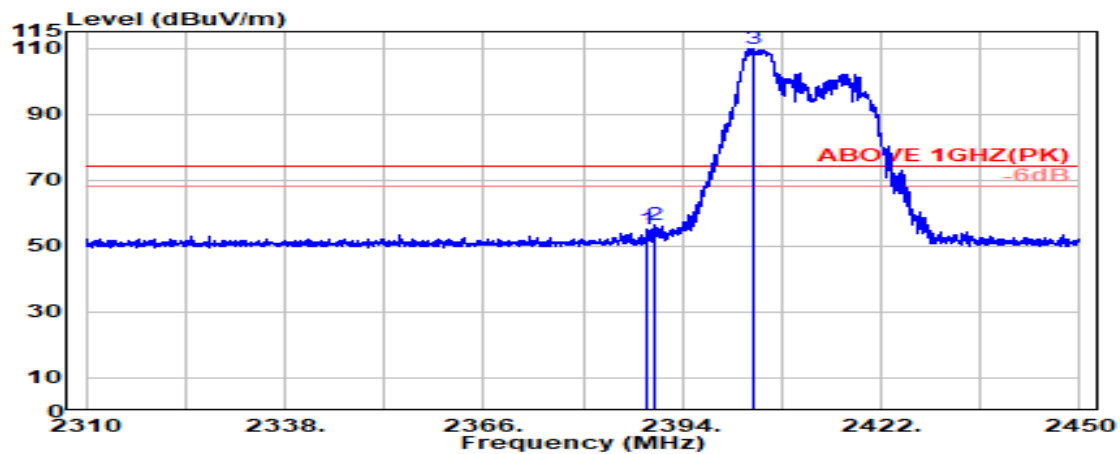

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.150	28.20	5.70	39.92	61.12	55.11	74.00	18.90	Peak
2390.000	28.20	5.70	39.92	62.23	56.21	74.00	17.79	Peak
@ 2404.050	28.21	5.72	39.92	115.70	109.71	---	---	Peak

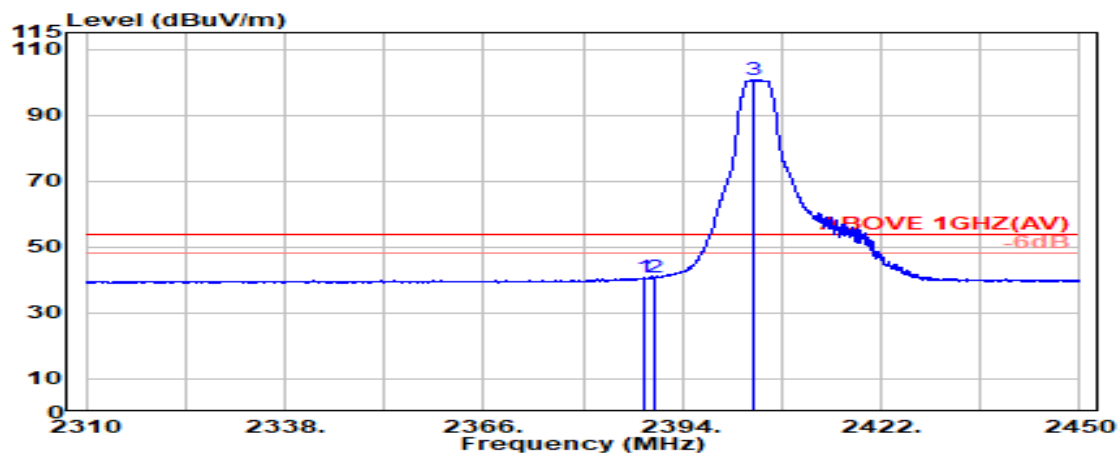

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.500	28.20	5.70	39.92	46.79	40.77	54.00	13.23	Average
2390.000	28.20	5.70	39.92	46.73	40.72	54.00	13.28	Average
@ 2404.200	28.21	5.72	39.92	106.79	100.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

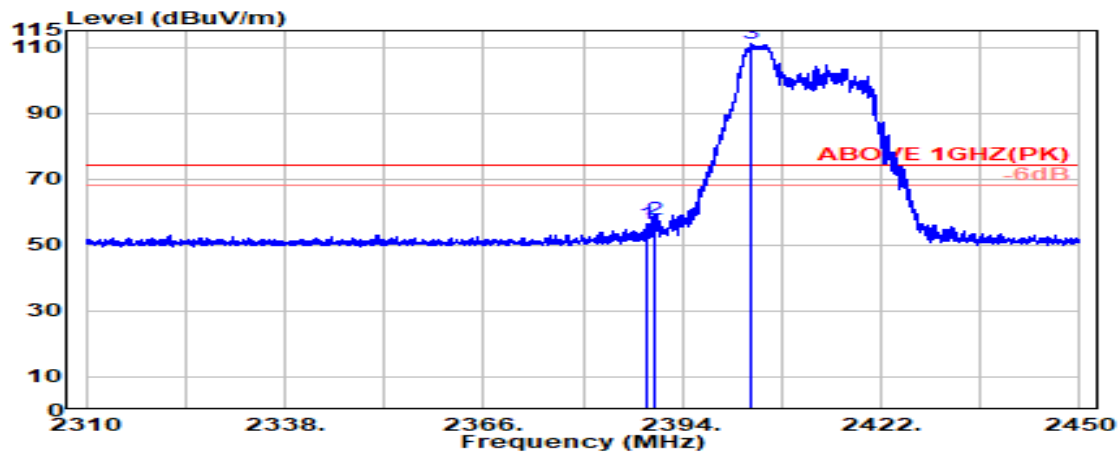

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.000	28.20	5.70	39.92	62.45	56.43	74.00	17.57	Peak
2390.000	28.20	5.70	39.92	63.83	57.82	74.00	16.18	Peak
@ 2403.700	28.21	5.72	39.92	117.01	111.02	---	---	Peak

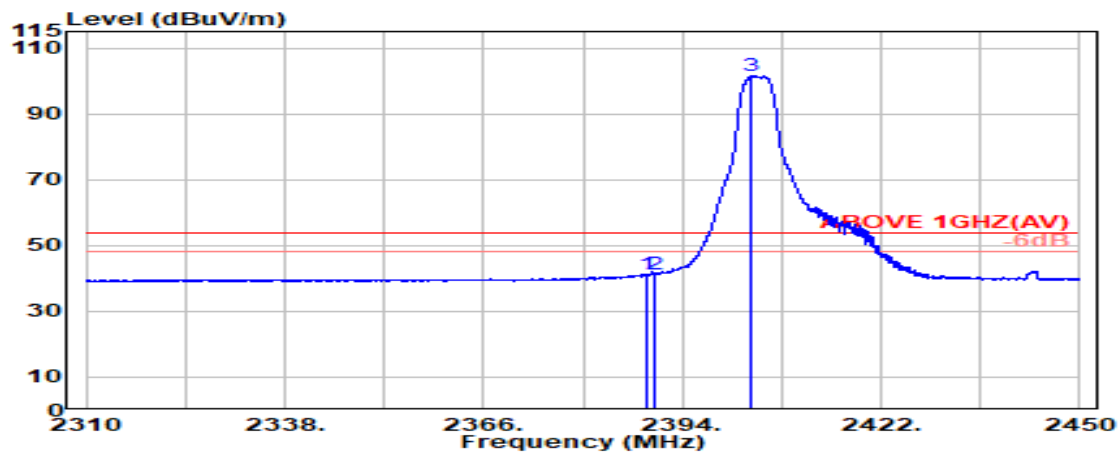

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.050	28.20	5.70	39.92	47.38	41.36	54.00	12.64	Average
2390.000	28.20	5.70	39.92	47.24	41.22	54.00	12.78	Average
@ 2403.700	28.21	5.72	39.92	107.49	101.50	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	52/40		

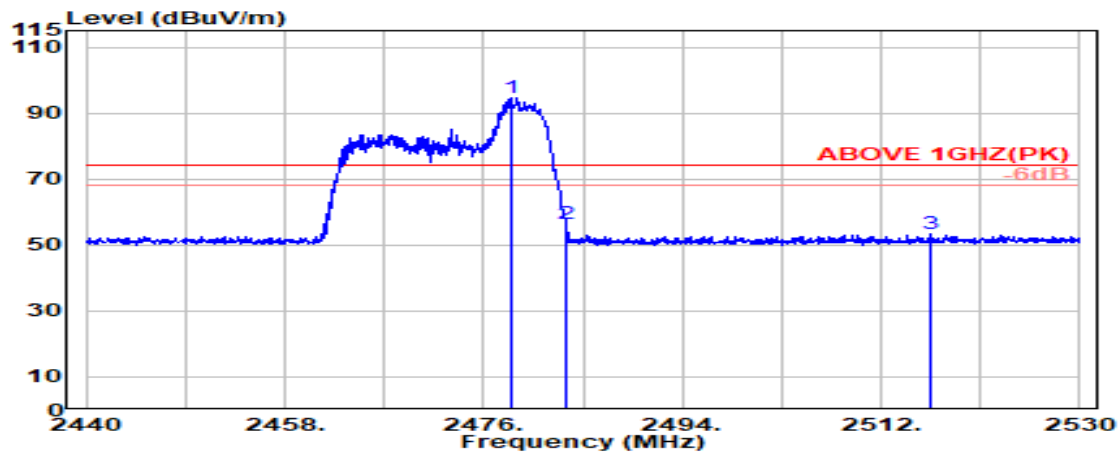

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.450	28.41	5.82	39.92	100.39	94.70	---	---	Peak
2483.500	28.43	5.83	39.92	61.89	56.24	74.00	17.76	Peak
2516.450	28.57	5.87	39.92	58.77	53.28	74.00	20.72	Peak

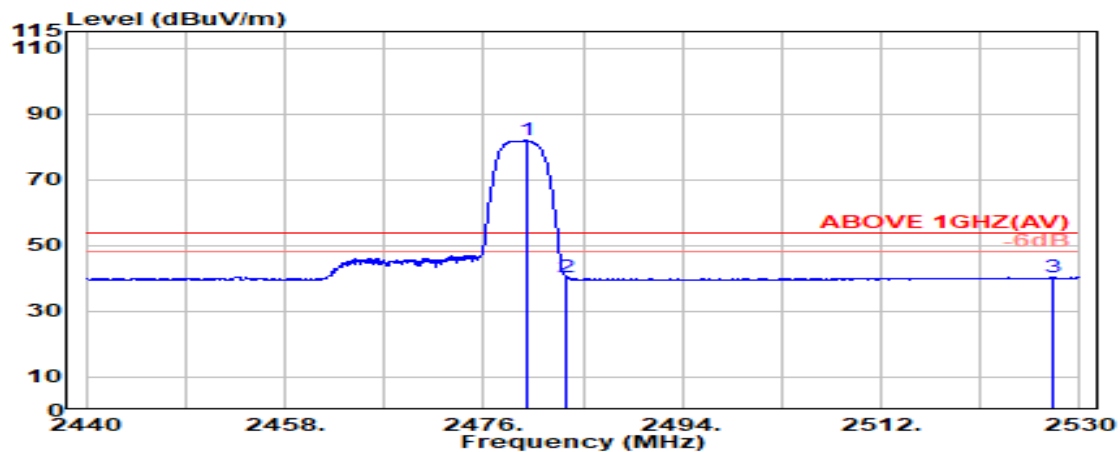

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.850	28.42	5.82	39.92	87.56	81.88	---	---	Average
2483.500	28.43	5.83	39.92	45.95	40.30	54.00	13.70	Average
2527.650	28.61	5.88	39.92	45.75	40.32	54.00	13.68	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	52/40		

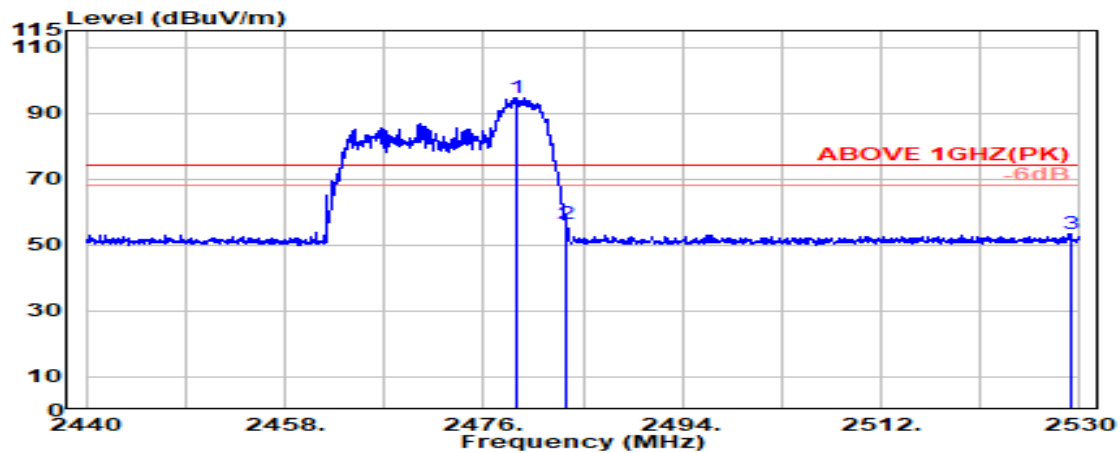

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.100	28.42	5.82	39.92	100.44	94.76	---	---	Peak
2483.500	28.43	5.83	39.92	61.96	56.30	74.00	17.70	Peak
2529.100	28.62	5.88	39.93	58.83	53.41	74.00	20.59	Peak

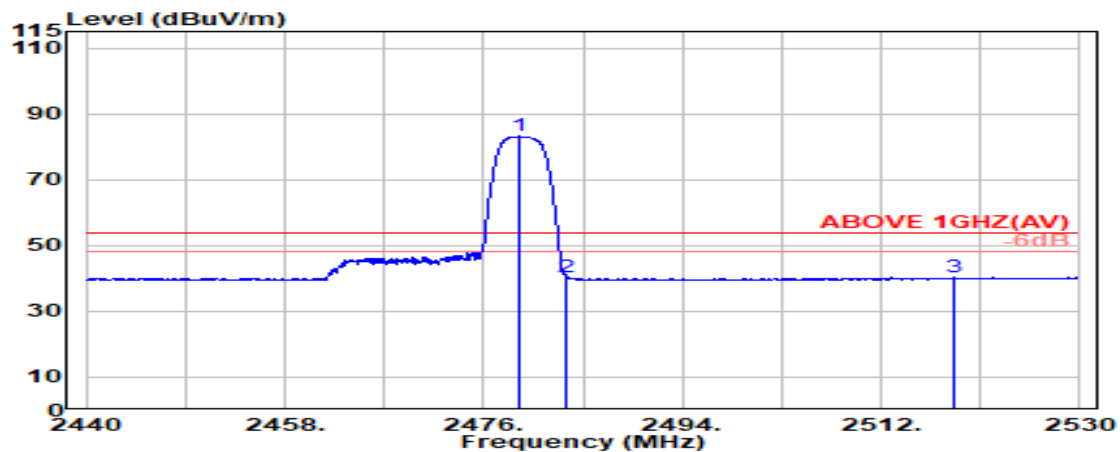

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.200	28.42	5.82	39.92	88.85	83.18	---	---	Average
2483.500	28.43	5.83	39.92	46.21	40.55	54.00	13.45	Average
2518.600	28.57	5.87	39.92	45.71	40.23	54.00	13.77	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
RU Configuration	106/53		

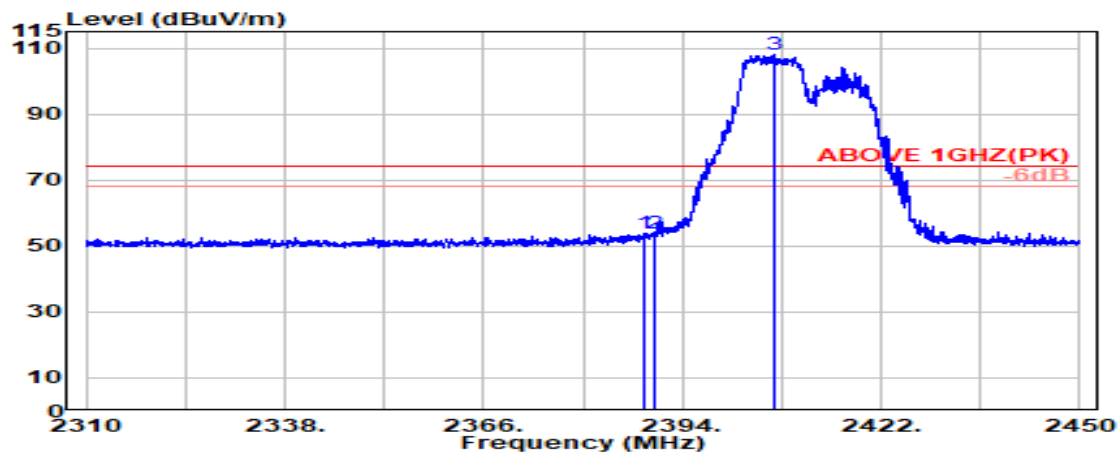

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.650	28.20	5.70	39.92	60.00	53.98	74.00	20.02	Peak
2390.000	28.20	5.70	39.92	59.70	53.69	74.00	20.31	Peak
@ 2406.800	28.21	5.73	39.92	113.86	107.89	---	---	Peak

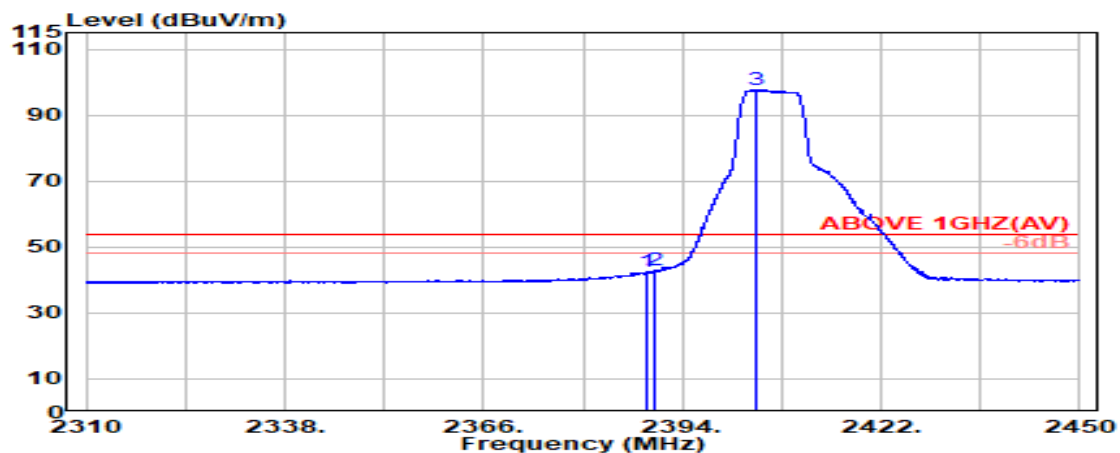

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.20	5.70	39.92	48.63	42.61	54.00	11.39	Average
2390.000	28.20	5.70	39.92	48.98	42.97	54.00	11.03	Average
@ 2404.400	28.21	5.72	39.92	103.78	97.79	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
RU Configuration	106/53		

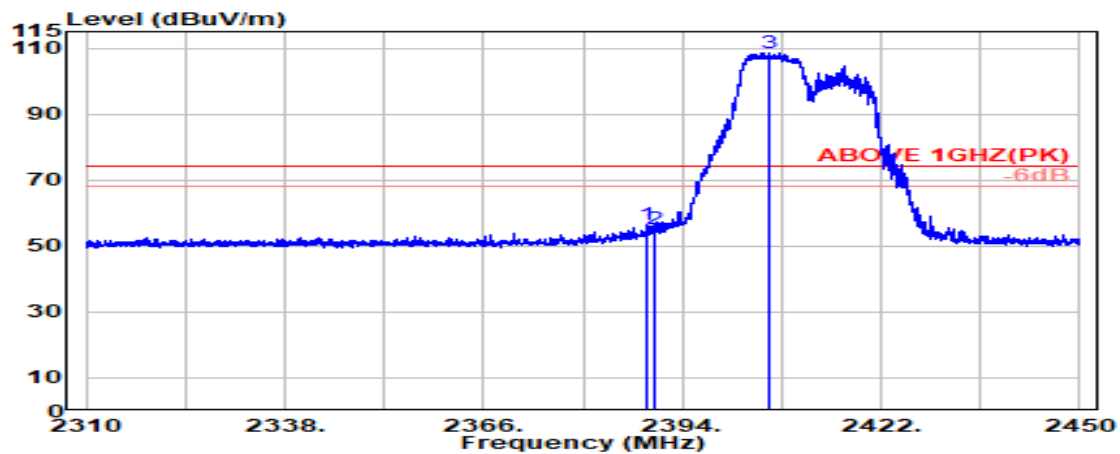

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.150	28.20	5.70	39.92	62.58	56.57	74.00	17.43	Peak
2390.000	28.20	5.70	39.92	61.00	54.99	74.00	19.01	Peak
@ 2406.350	28.21	5.73	39.92	114.54	108.56	---	---	Peak

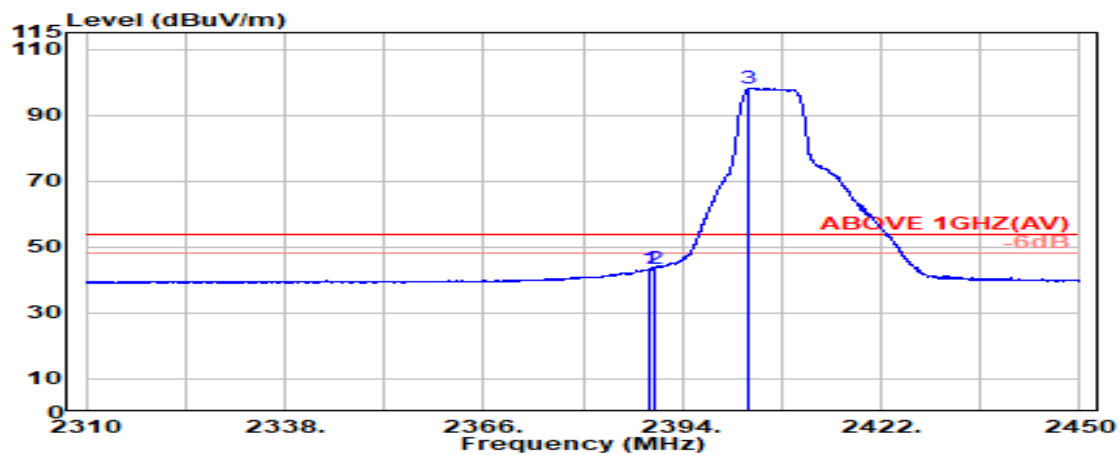

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	5.70	39.92	49.25	43.24	54.00	10.76	Average
2390.000	28.20	5.70	39.92	49.58	43.57	54.00	10.43	Average
@ 2403.450	28.21	5.72	39.92	104.19	98.20	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

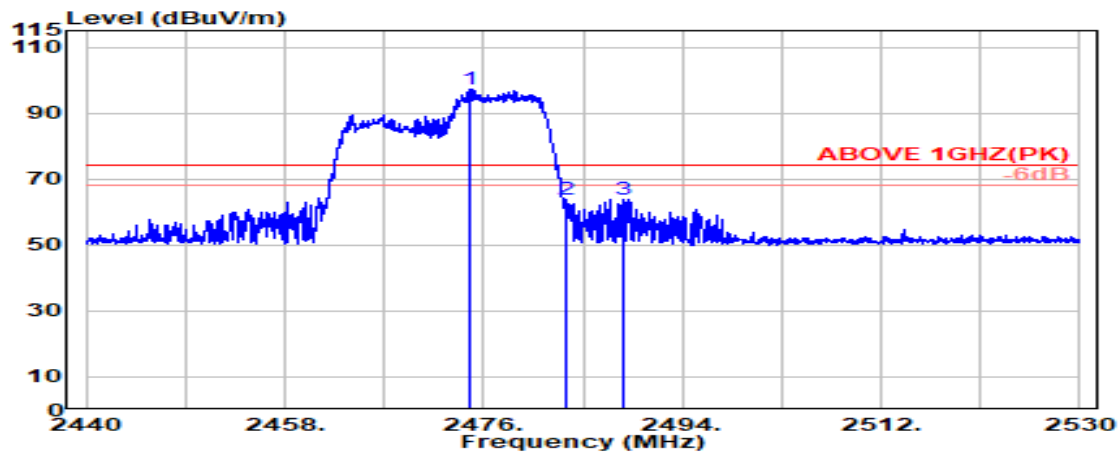

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.850	28.40	5.82	39.92	102.76	97.05	---	---	Peak
2483.500	28.43	5.83	39.92	69.37	63.71	74.00	10.29	Peak
2488.700	28.46	5.84	39.92	69.44	63.81	74.00	10.19	Peak

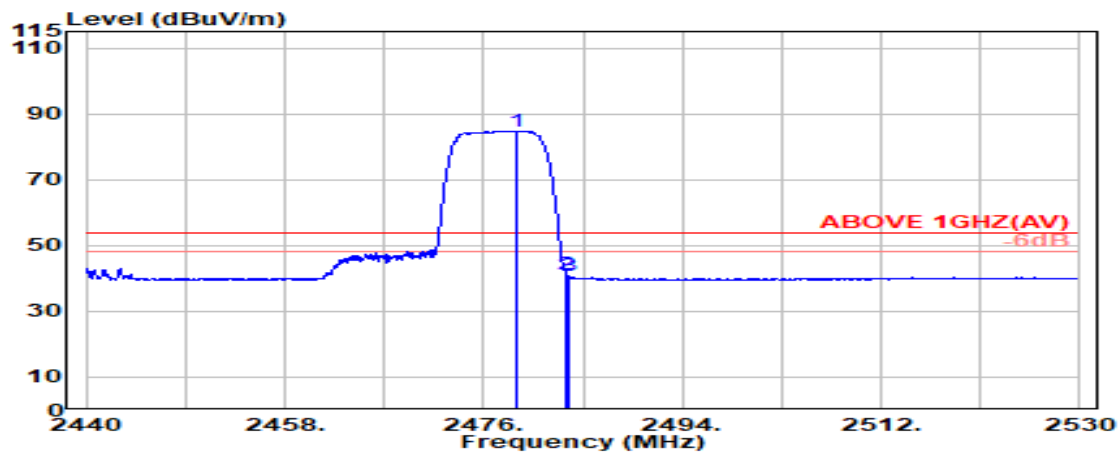

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.950	28.42	5.82	39.92	90.46	84.78	---	---	Average
2483.500	28.43	5.83	39.92	46.81	41.16	54.00	12.84	Average
2483.700	28.44	5.83	39.92	46.44	40.78	54.00	13.22	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

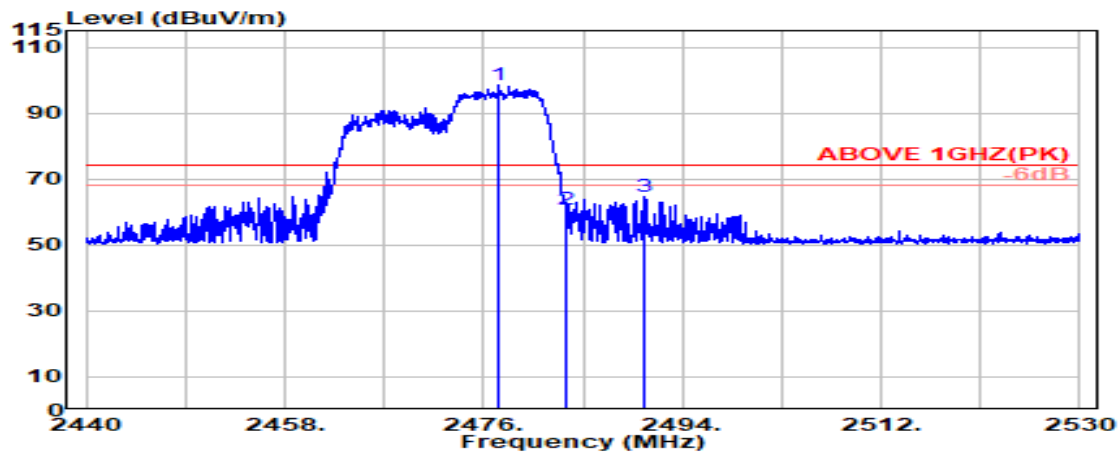

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.400	28.41	5.82	39.92	104.10	98.41	---	---	Peak
2483.500	28.43	5.83	39.92	66.58	60.92	74.00	13.08	Peak
2490.450	28.46	5.84	39.92	70.09	64.47	74.00	9.53	Peak

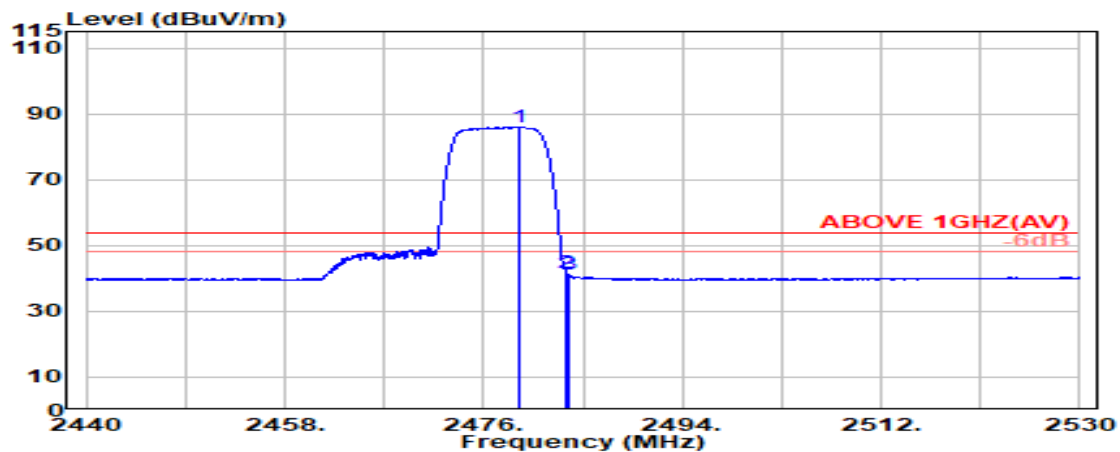

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.200	28.42	5.82	39.92	91.75	86.07	---	---	Average
2483.500	28.43	5.83	39.92	47.25	41.59	54.00	12.41	Average
2483.700	28.44	5.83	39.92	46.78	41.13	54.00	12.87	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

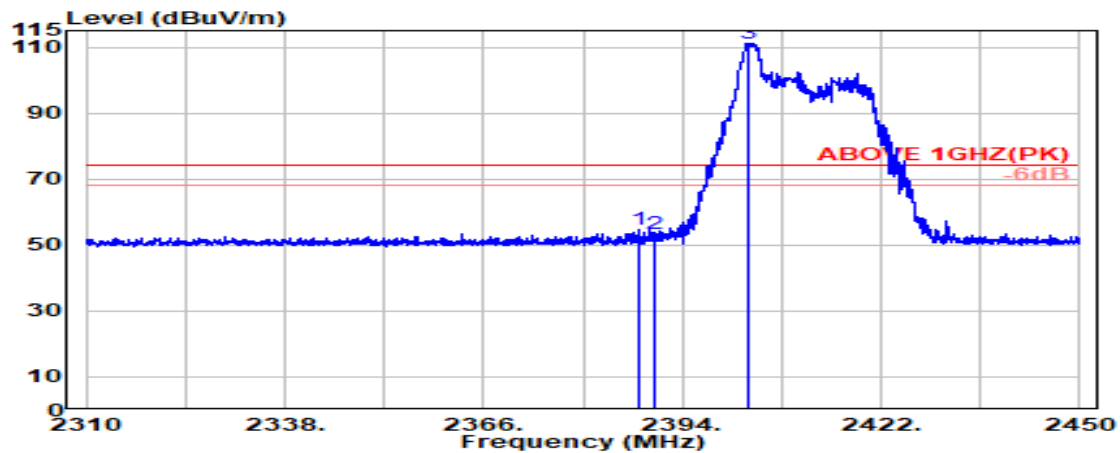

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.850	28.20	5.70	39.92	60.86	54.85	74.00	19.15	Peak
2390.000	28.20	5.70	39.92	59.54	53.52	74.00	20.48	Peak
@ 2403.150	28.21	5.72	39.92	117.25	111.26	---	---	Peak

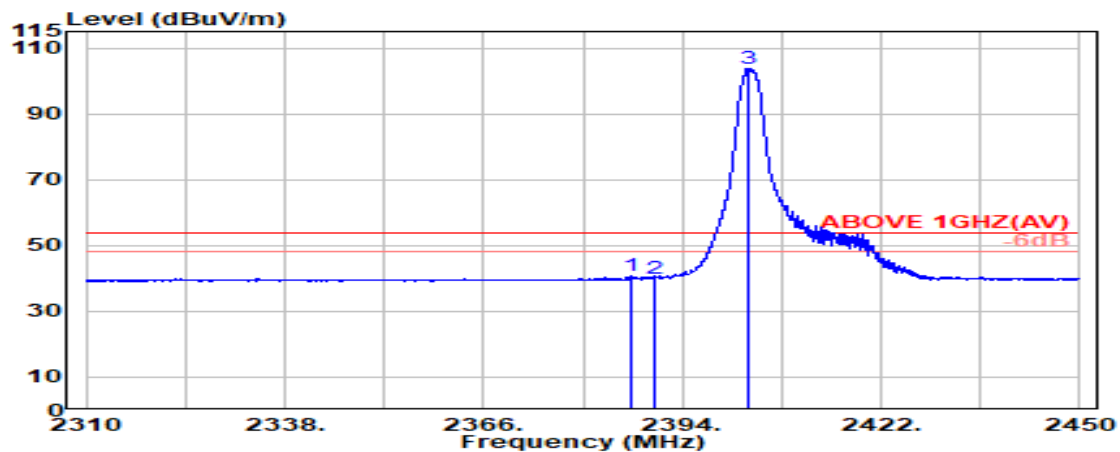

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.750	28.20	5.70	39.92	46.60	40.58	54.00	13.42	Average
2390.000	28.20	5.70	39.92	45.85	39.83	54.00	14.17	Average
@ 2403.350	28.21	5.72	39.92	109.91	103.92	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

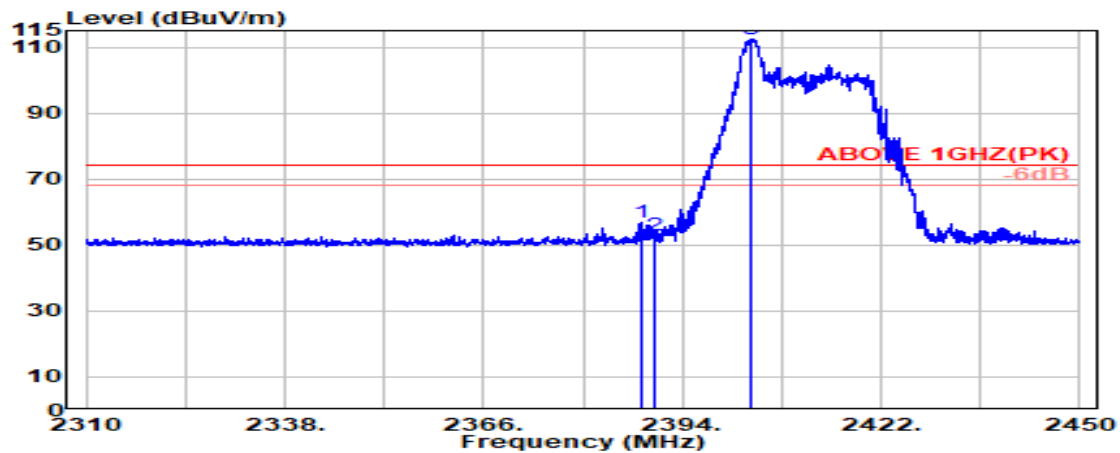

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.350	28.20	5.70	39.92	62.72	56.71	74.00	17.29	Peak
2390.000	28.20	5.70	39.92	59.08	53.06	74.00	20.94	Peak
@ 2403.750	28.21	5.72	39.92	118.56	112.57	---	---	Peak

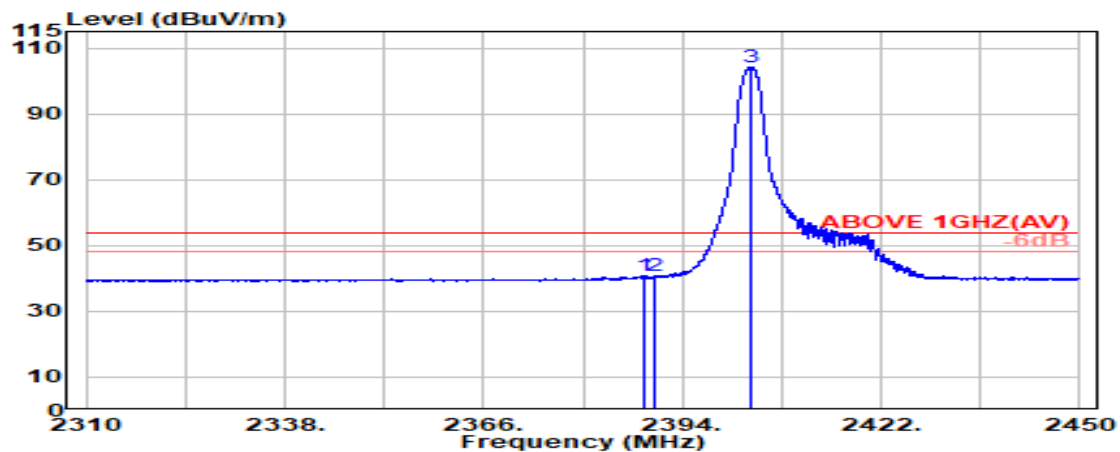

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.550	28.20	5.70	39.92	46.81	40.79	54.00	13.21	Average
2390.000	28.20	5.70	39.92	46.70	40.68	54.00	13.32	Average
@ 2403.800	28.21	5.72	39.92	110.07	104.08	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472 MHz
RU Configuration	26/8		

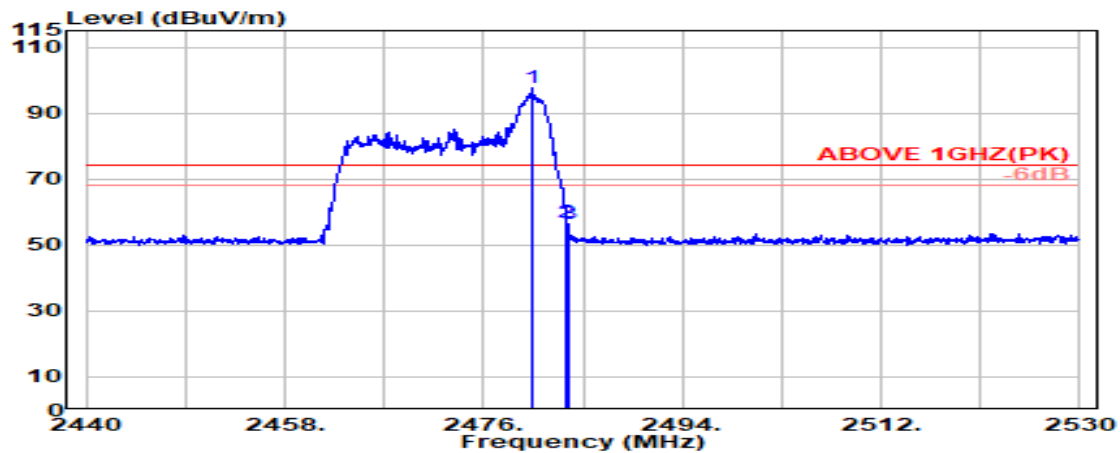

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.450	28.42	5.82	39.92	103.17	97.50	---	---	Peak
2483.500	28.43	5.83	39.92	62.50	56.84	74.00	17.16	Peak
2483.700	28.44	5.83	39.92	61.97	56.31	74.00	17.69	Peak

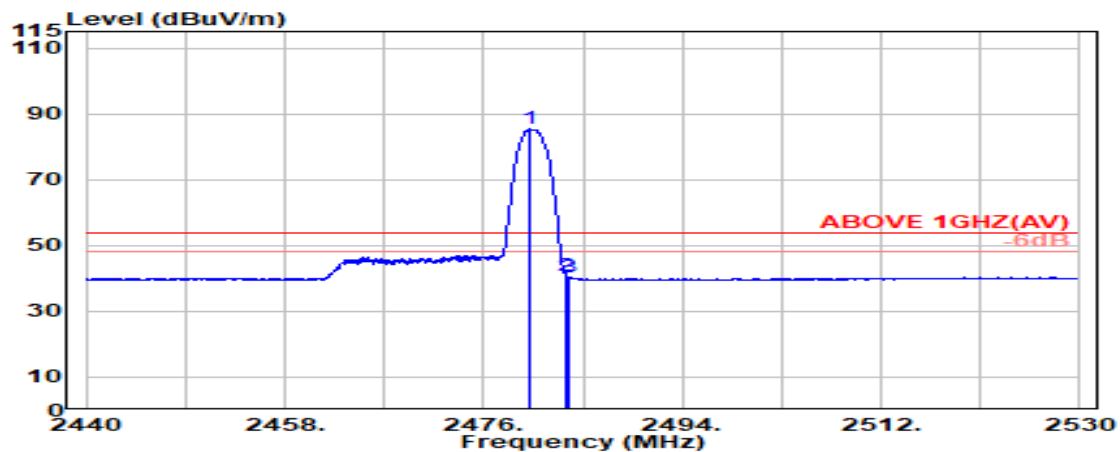

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.250	28.42	5.82	39.92	90.96	85.28	---	---	Average
2483.500	28.43	5.83	39.92	46.39	40.73	54.00	13.27	Average
2483.700	28.44	5.83	39.92	46.01	40.35	54.00	13.65	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472 MHz
RU Configuration	26/8		

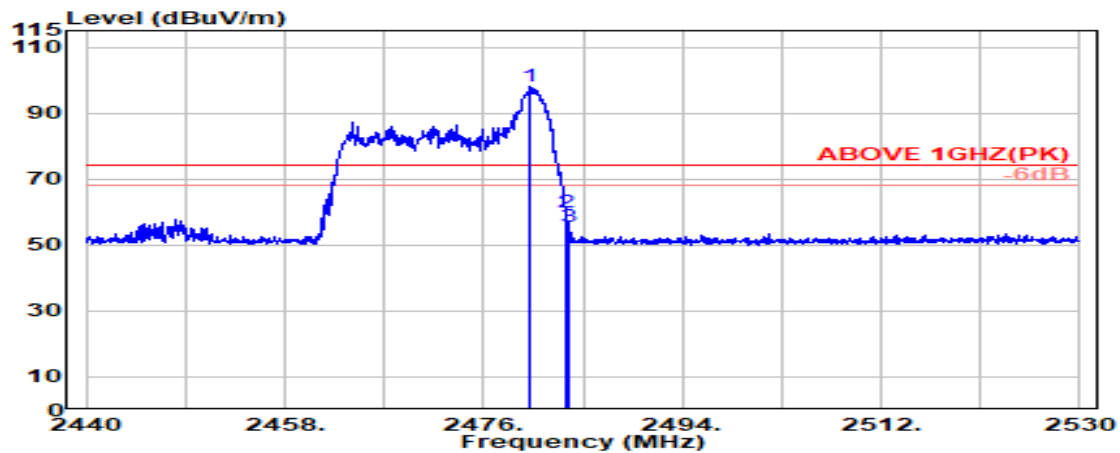

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.42	5.82	39.92	103.56	97.88	---	---	Peak
2483.500	28.43	5.83	39.92	65.36	59.70	74.00	14.30	Peak
2483.800	28.44	5.83	39.92	61.36	55.70	74.00	18.30	Peak

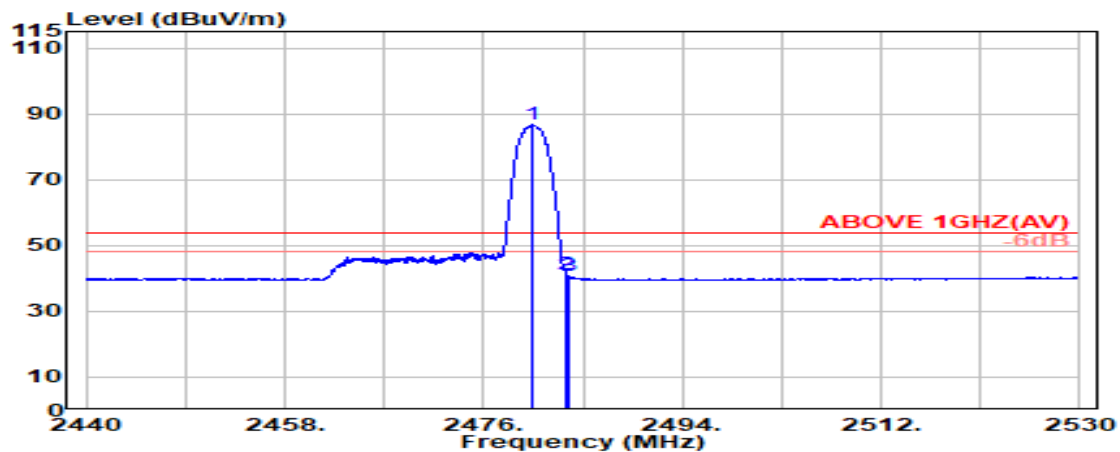

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.42	5.82	39.92	92.31	86.64	---	---	Average
2483.500	28.43	5.83	39.92	46.81	41.15	54.00	12.85	Average
2483.700	28.44	5.83	39.92	46.29	40.64	54.00	13.36	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

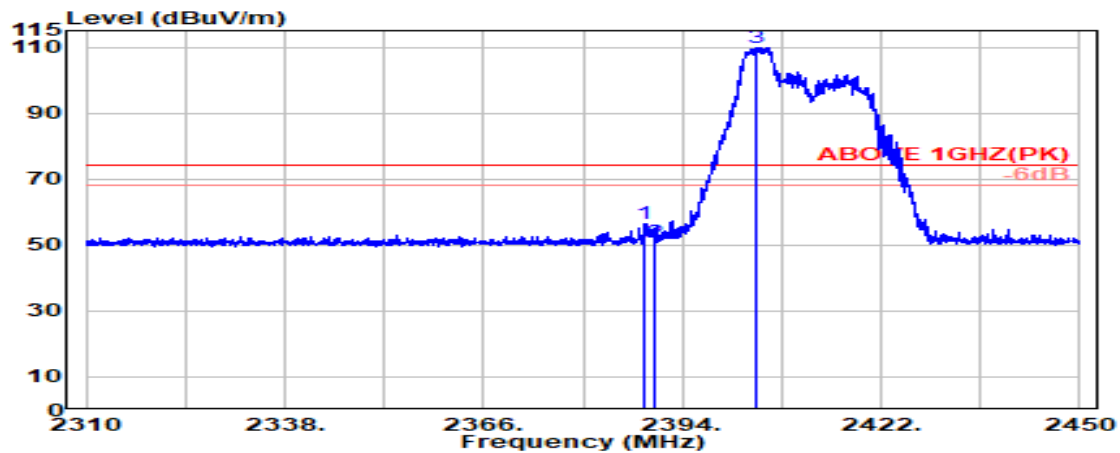

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.700	28.20	5.70	39.92	62.62	56.61	74.00	17.39	Peak
2390.000	28.20	5.70	39.92	56.82	50.80	74.00	23.20	Peak
@ 2404.350	28.21	5.72	39.92	115.94	109.95	---	---	Peak

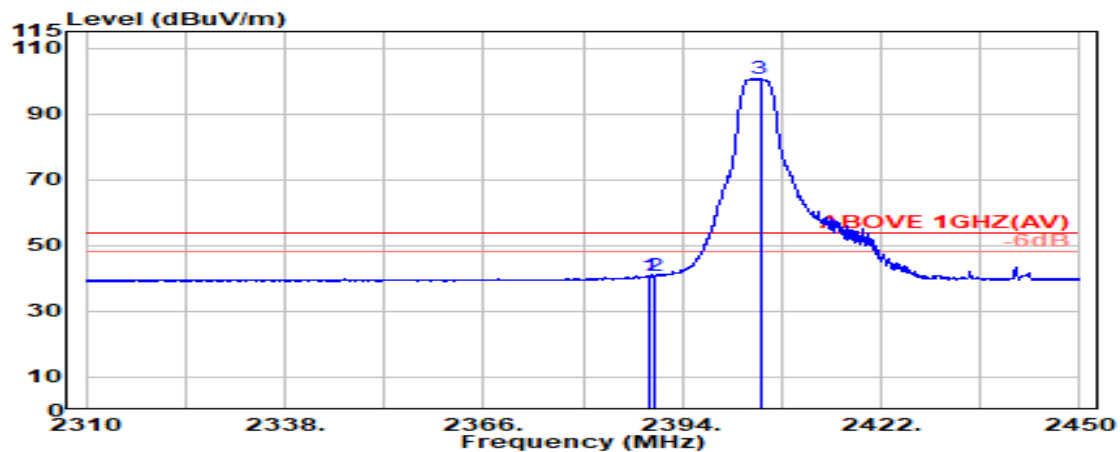

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.20	5.70	39.92	46.92	40.90	54.00	13.10	Average
2390.000	28.20	5.70	39.92	47.00	40.98	54.00	13.02	Average
@ 2404.950	28.21	5.72	39.92	106.61	100.63	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

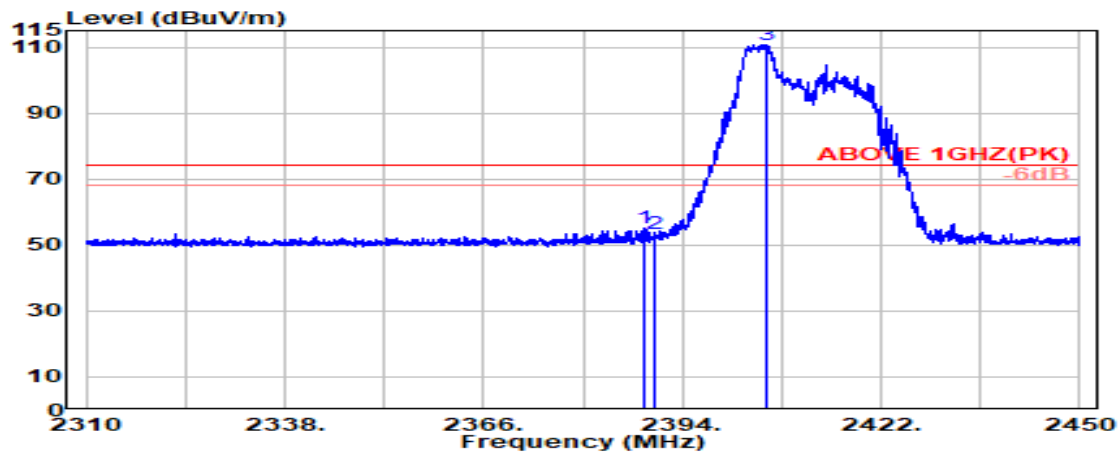

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.700	28.20	5.70	39.92	60.96	54.94	74.00	19.06	Peak
2390.000	28.20	5.70	39.92	59.22	53.21	74.00	20.79	Peak
@ 2405.750	28.21	5.72	39.92	116.83	110.85	---	---	Peak

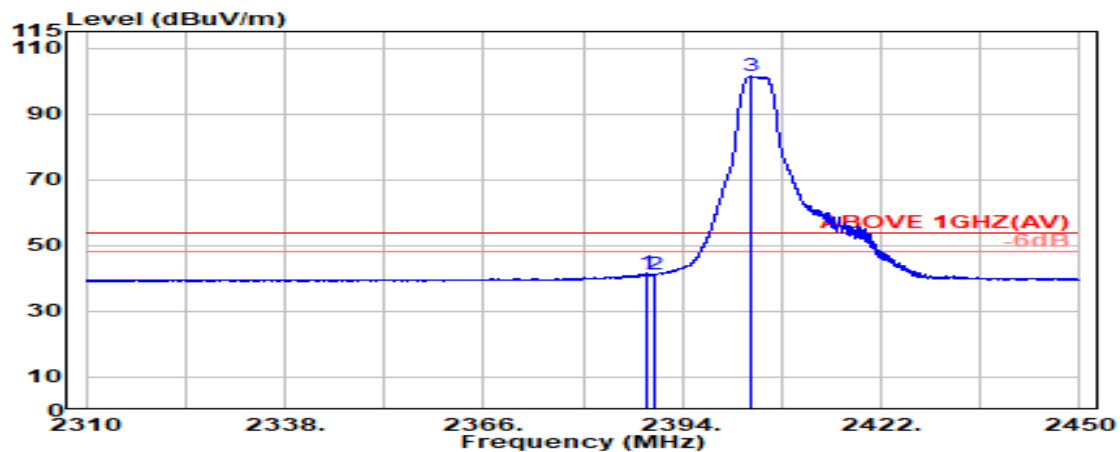

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.150	28.20	5.70	39.92	47.49	41.47	54.00	12.53	Average
2390.000	28.20	5.70	39.92	47.21	41.20	54.00	12.80	Average
@ 2403.650	28.21	5.72	39.92	107.34	101.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

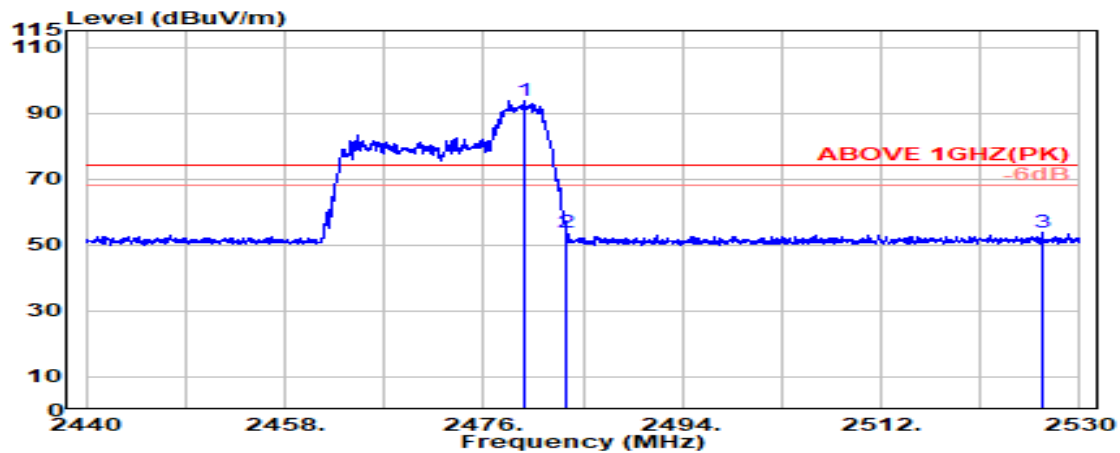

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.650	28.42	5.82	39.92	99.29	93.62	---	---	Peak
2483.500	28.43	5.83	39.92	59.30	53.64	74.00	20.36	Peak
2526.550	28.61	5.88	39.92	59.08	53.64	74.00	20.36	Peak

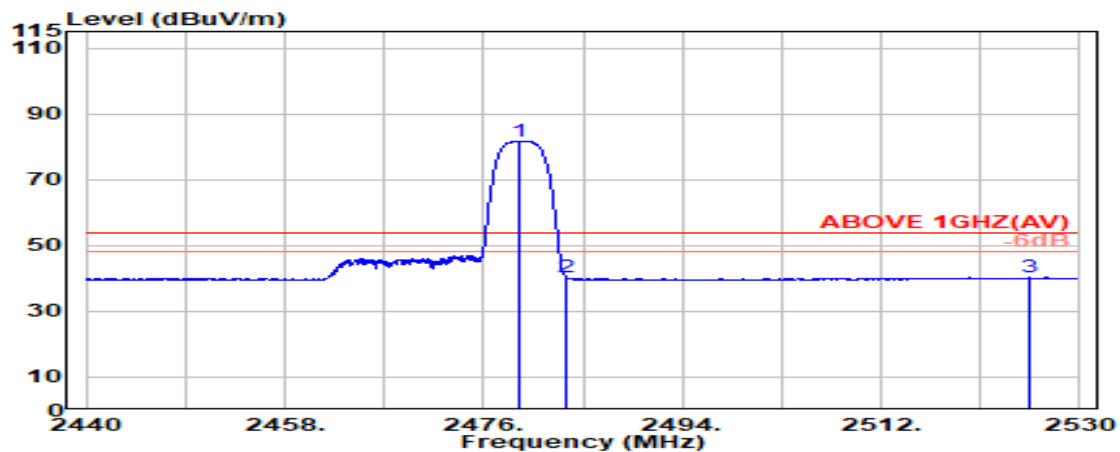

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.200	28.42	5.82	39.92	87.48	81.80	---	---	Average
2483.500	28.43	5.83	39.92	46.03	40.38	54.00	13.62	Average
2525.500	28.60	5.88	39.92	45.78	40.33	54.00	13.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

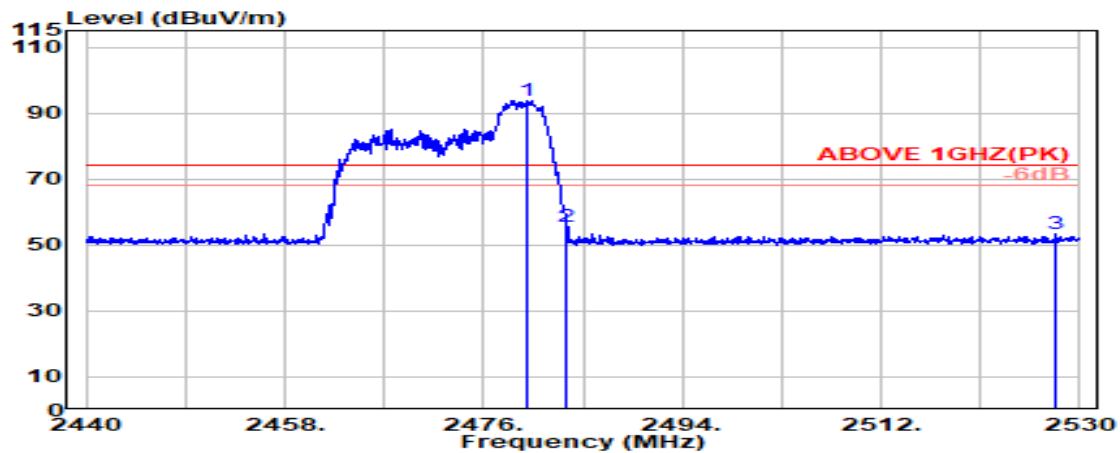

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.950	28.42	5.82	39.92	99.47	93.80	---	---	Peak
2483.500	28.43	5.83	39.92	61.03	55.37	74.00	18.63	Peak
2527.850	28.61	5.88	39.92	59.01	53.58	74.00	20.42	Peak

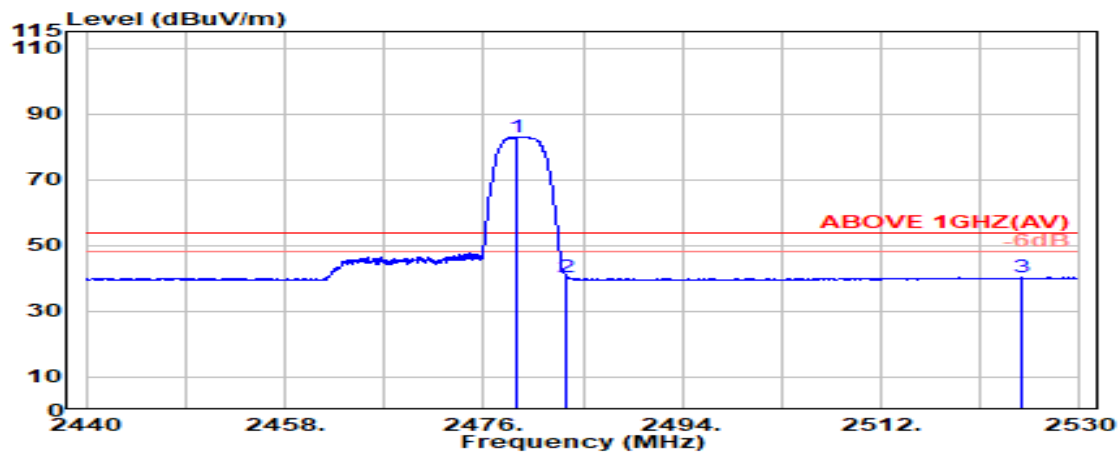

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.100	28.42	5.82	39.92	88.74	83.05	---	---	Average
2483.500	28.43	5.83	39.92	46.11	40.45	54.00	13.55	Average
2524.750	28.60	5.88	39.92	45.71	40.27	54.00	13.73	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
RU Configuration	106/53		

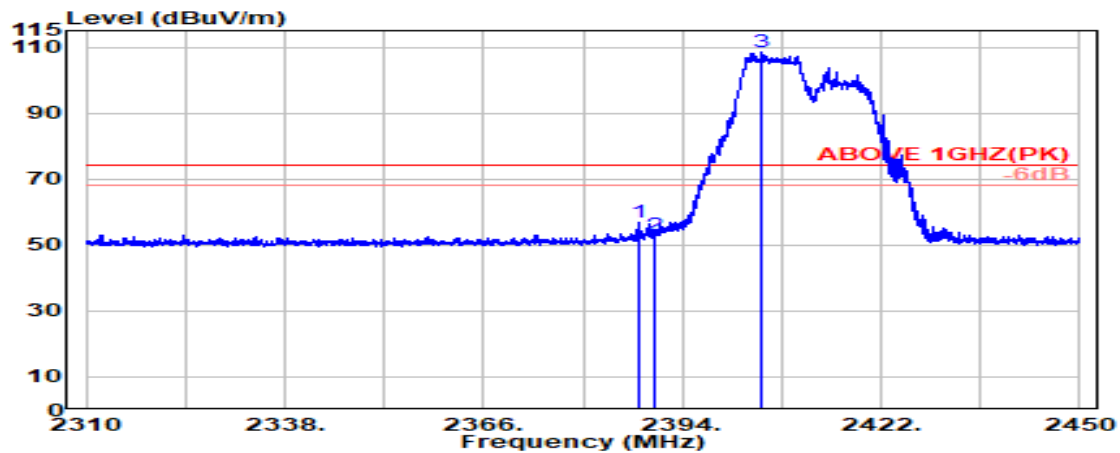

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	28.20	5.70	39.92	62.68	56.67	74.00	17.33	Peak
2390.000	28.20	5.70	39.92	58.91	52.89	74.00	21.11	Peak
@ 2405.250	28.21	5.72	39.92	114.46	108.47	---	---	Peak

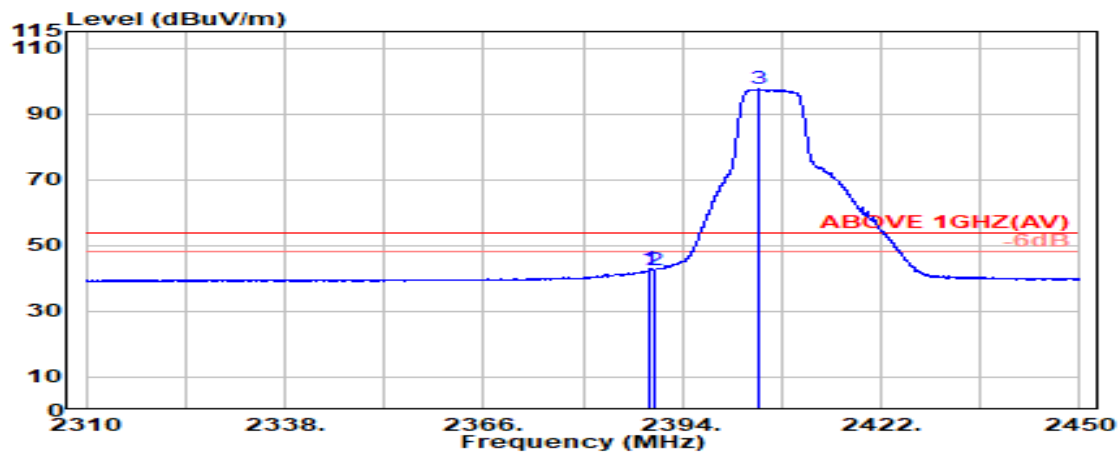

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	5.70	39.92	48.90	42.88	54.00	11.12	Average
2390.000	28.20	5.70	39.92	48.60	42.58	54.00	11.42	Average
@ 2404.650	28.21	5.72	39.92	103.46	97.47	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
RU Configuration	106/53		

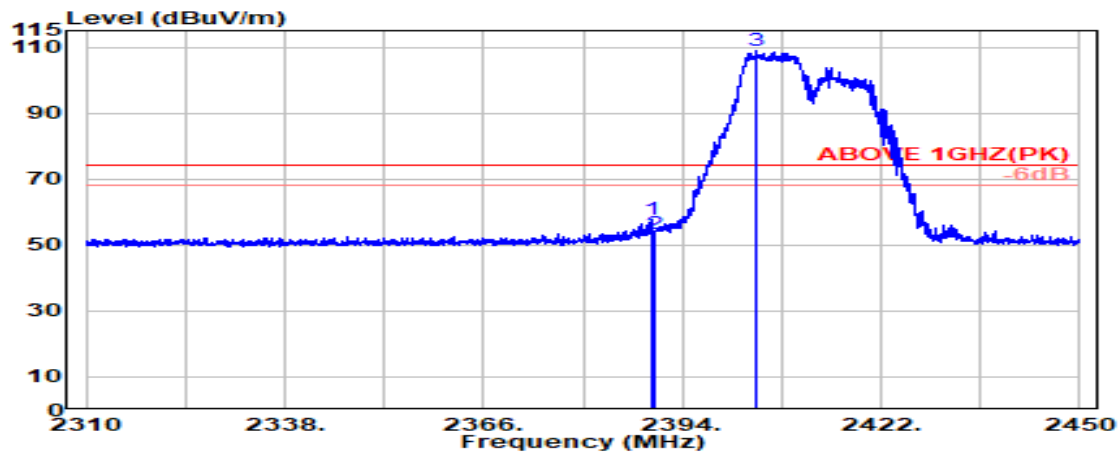

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.92	63.53	57.51	74.00	16.49	Peak
2390.000	28.20	5.70	39.92	59.50	53.48	74.00	20.52	Peak
@ 2404.300	28.21	5.72	39.92	114.74	108.75	---	---	Peak

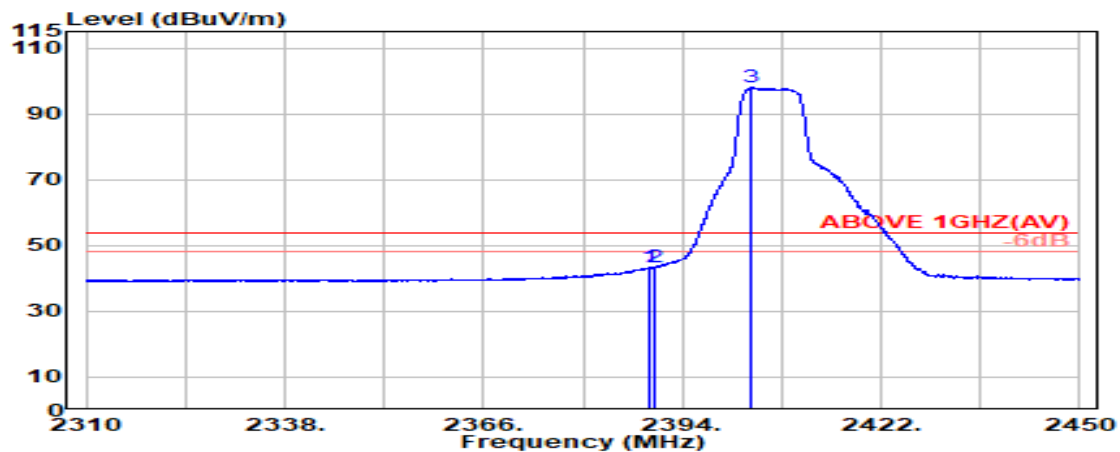

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	28.20	5.70	39.92	49.35	43.33	54.00	10.67	Average
2390.000	28.20	5.70	39.92	49.57	43.56	54.00	10.44	Average
@ 2403.600	28.21	5.72	39.92	103.95	97.96	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

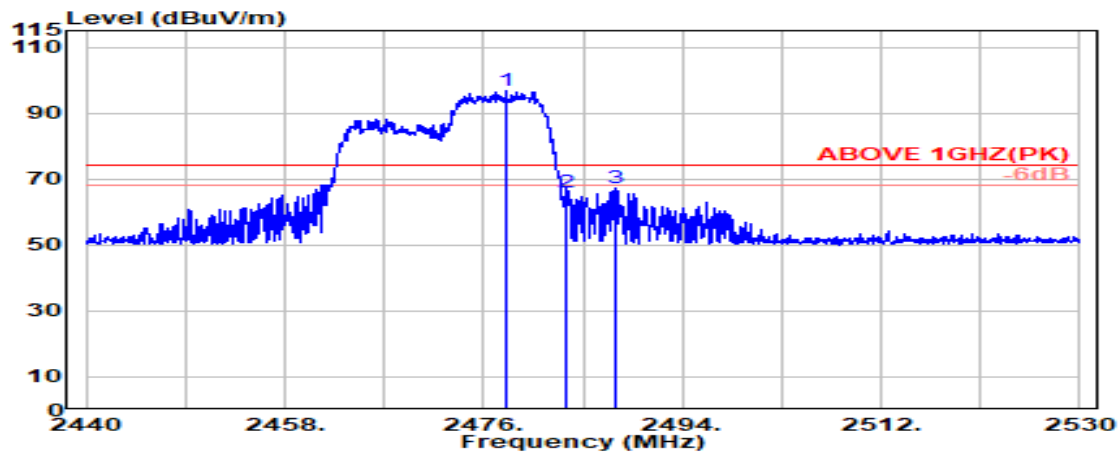

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.100	28.41	5.82	39.92	102.51	96.82	---	---	Peak
2483.500	28.43	5.83	39.92	71.50	65.84	74.00	8.16	Peak
2488.000	28.45	5.83	39.92	72.74	67.11	74.00	6.89	Peak

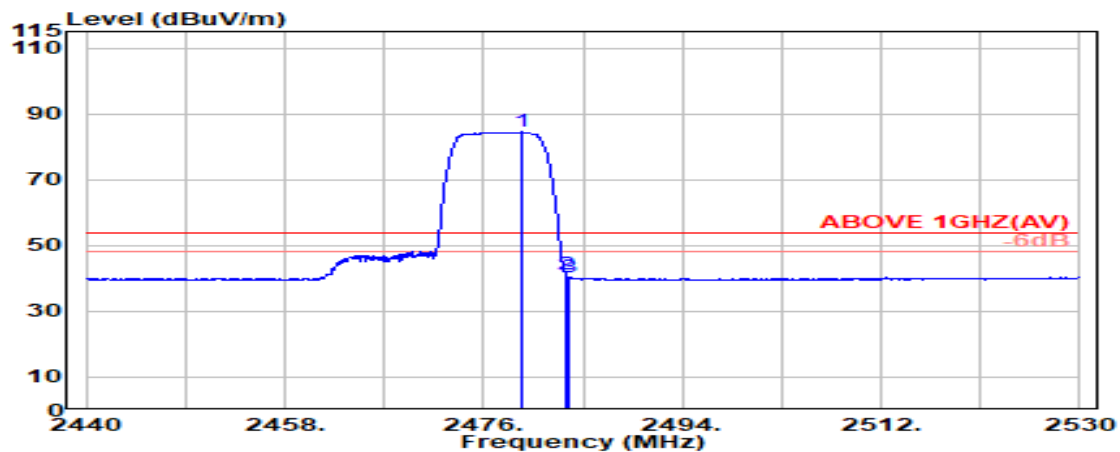

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.550	28.42	5.82	39.92	90.13	84.45	---	---	Average
2483.500	28.43	5.83	39.92	46.78	41.12	54.00	12.88	Average
2483.700	28.44	5.83	39.92	46.15	40.49	54.00	13.51	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

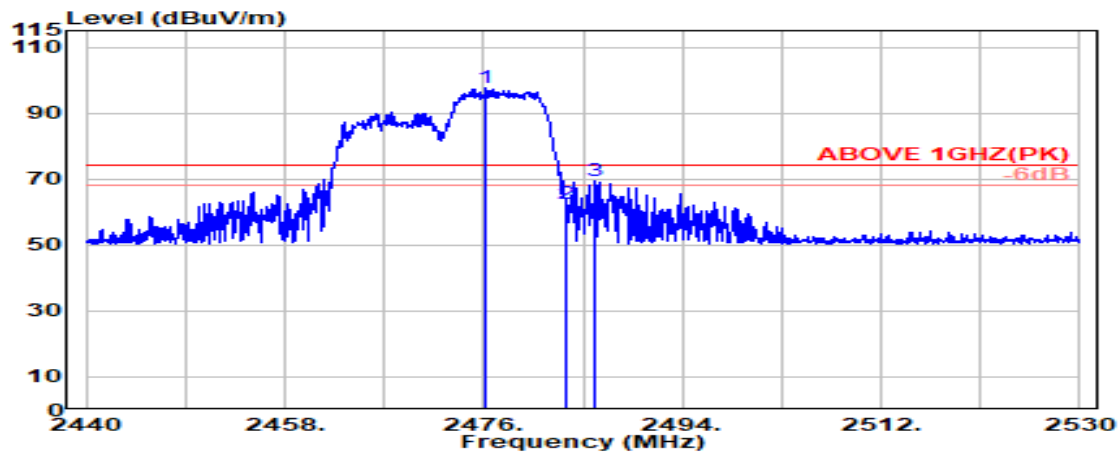

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.150	28.41	5.82	39.92	103.30	97.61	---	---	Peak
2483.500	28.43	5.83	39.92	68.29	62.63	74.00	11.37	Peak
2486.000	28.44	5.83	39.92	75.08	69.43	74.00	4.57	Peak

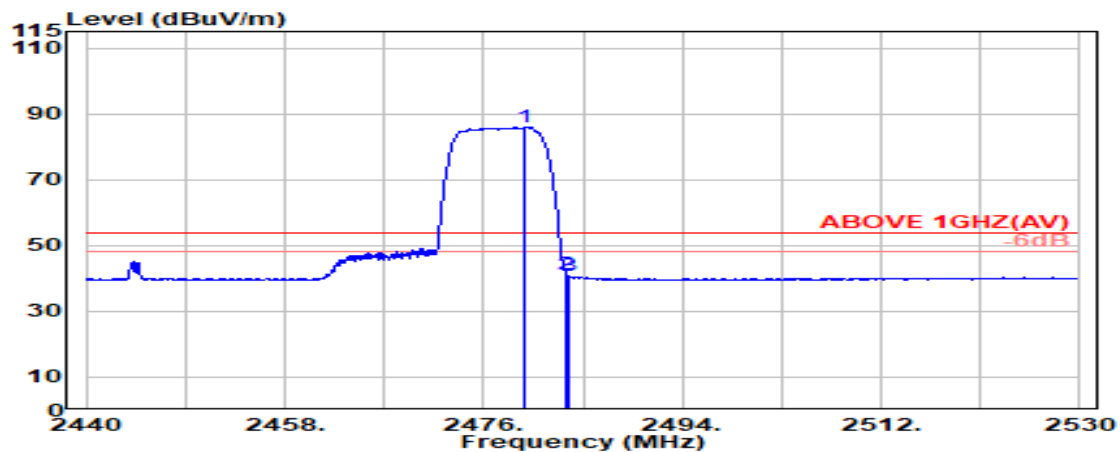

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.800	28.42	5.82	39.92	91.47	85.80	---	---	Average
2483.500	28.43	5.83	39.92	46.95	41.29	54.00	12.71	Average
2483.700	28.44	5.83	39.92	46.35	40.69	54.00	13.31	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


● BLE Mode

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

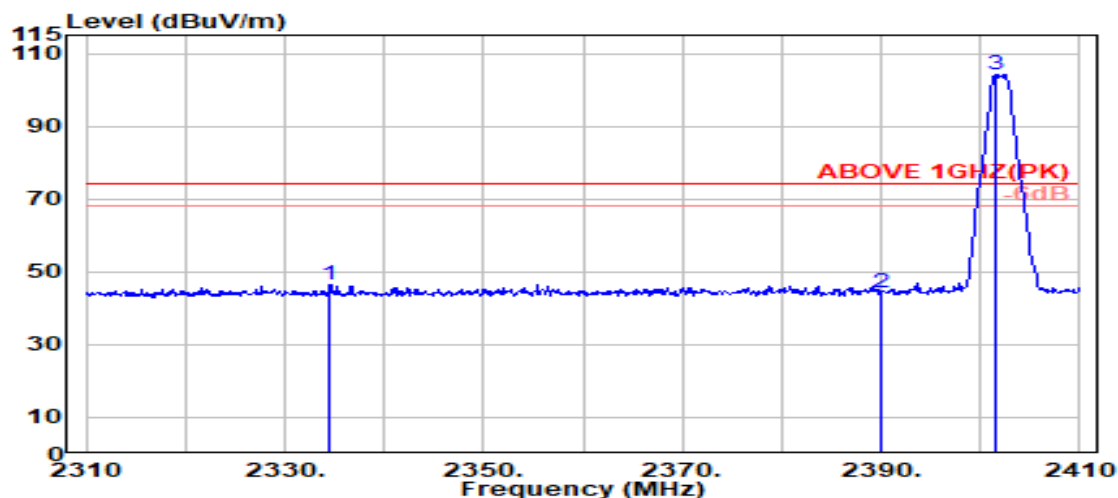

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2334.500	28.14	5.63	39.92	52.62	46.46	74.00	27.54	Peak
2390.000	28.20	5.70	39.92	50.31	44.29	74.00	29.71	Peak
@ 2401.500	28.20	5.72	39.92	110.23	104.23	---	---	Peak

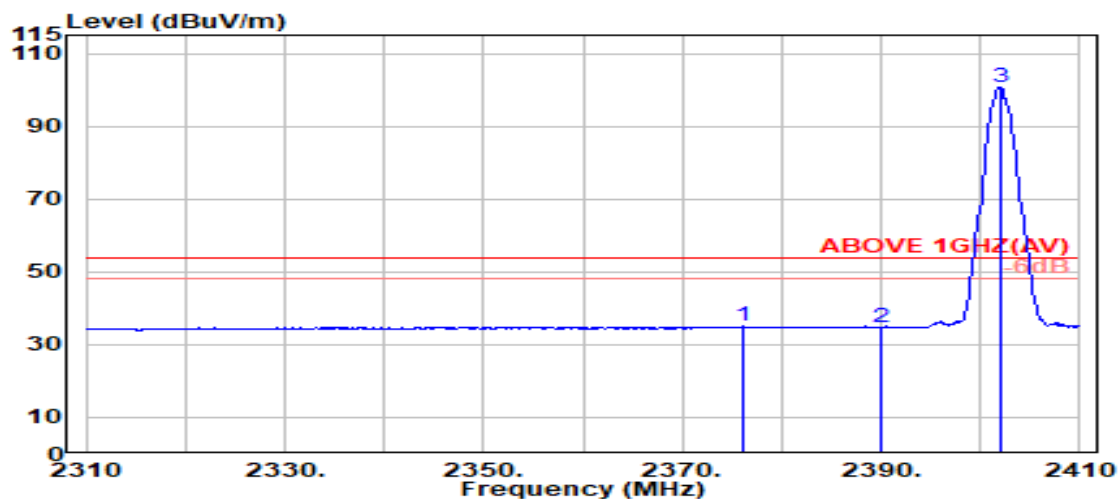

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2376.000	28.20	5.68	39.92	41.16	35.13	54.00	18.87	Average
2390.000	28.20	5.70	39.92	40.78	34.76	54.00	19.24	Average
@ 2402.100	28.20	5.72	39.92	106.77	100.78	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

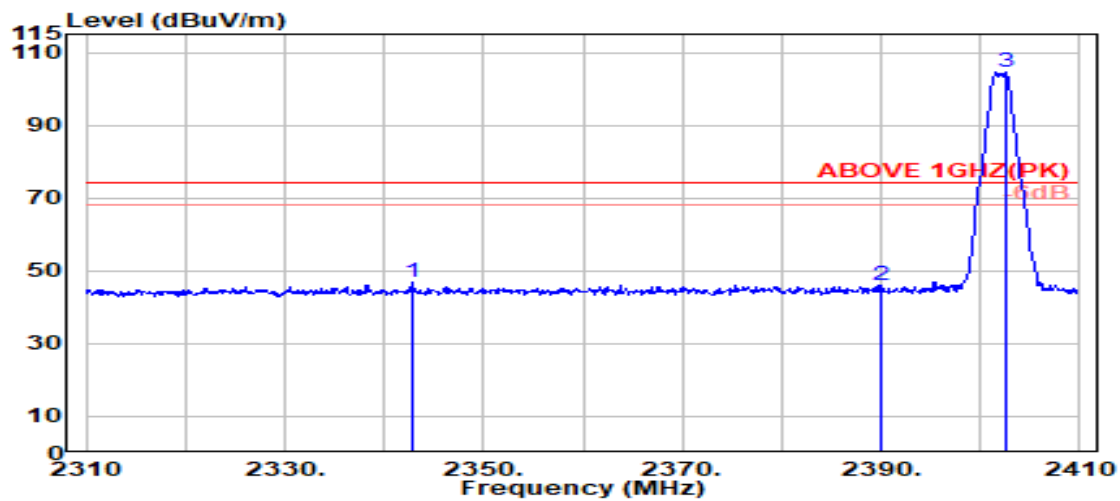

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.800	28.17	5.64	39.92	52.84	46.73	74.00	27.27	Peak
2390.000	28.20	5.70	39.92	52.23	46.21	74.00	27.79	Peak
@ 2402.500	28.21	5.72	39.92	110.61	104.62	---	---	Peak

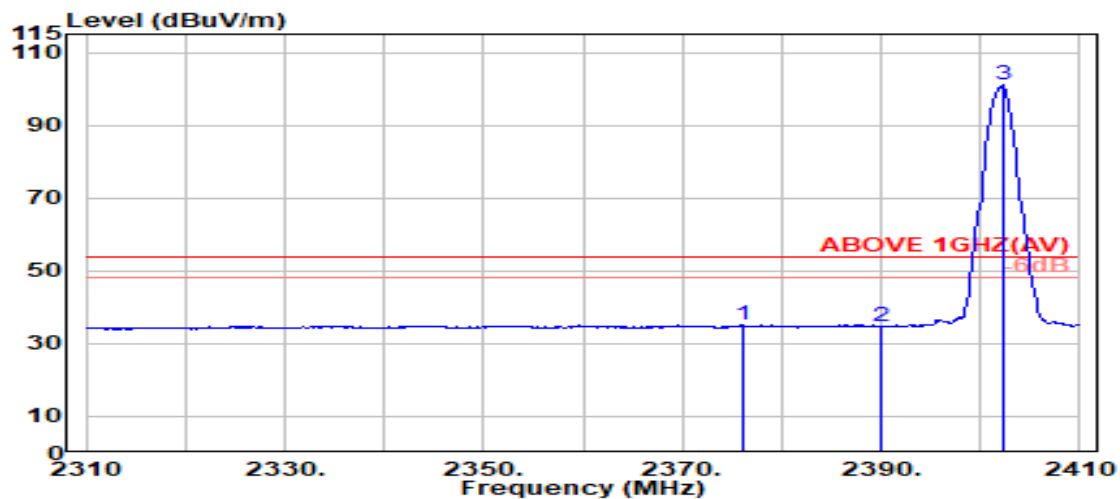

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2376.100	28.20	5.68	39.92	41.20	35.17	54.00	18.83	Average
2390.000	28.20	5.70	39.92	40.72	34.71	54.00	19.29	Average
@ 2402.200	28.20	5.72	39.92	106.99	100.99	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

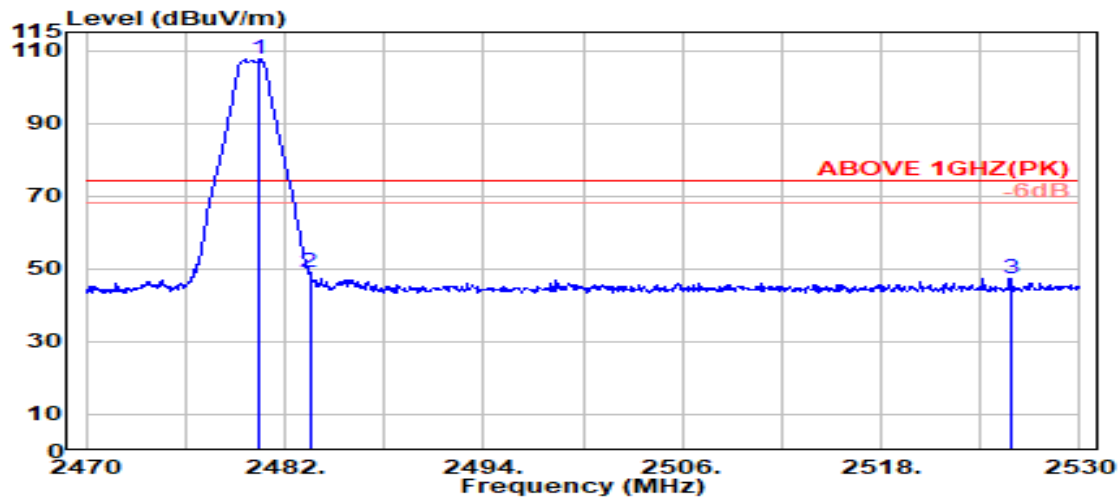

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.473	28.42	5.82	39.92	113.20	107.52	---	---	Peak
2483.500	28.43	5.83	39.92	54.90	49.24	74.00	24.76	Peak
2525.800	28.60	5.88	39.92	52.79	47.35	74.00	26.65	Peak

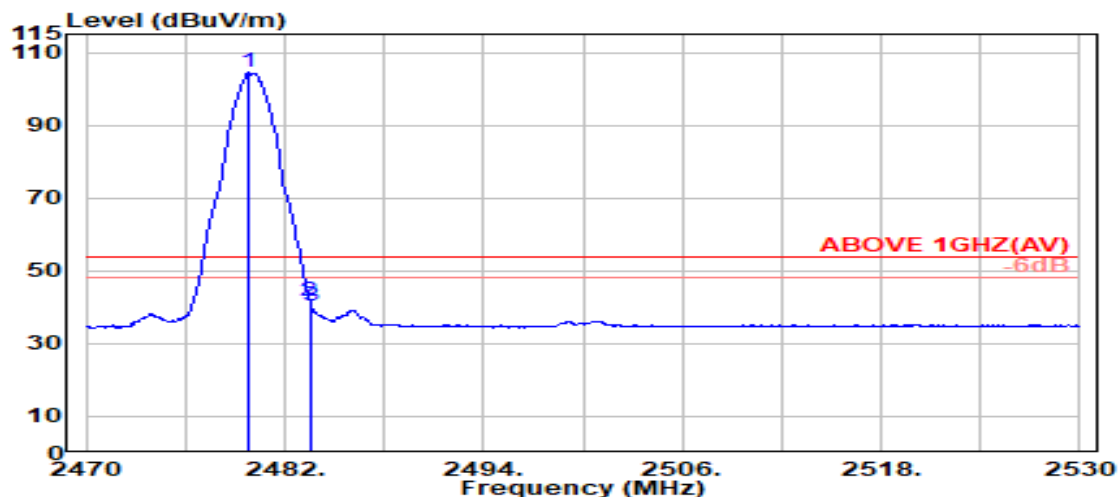

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.818	28.42	5.82	39.92	110.46	104.79	---	---	Average
2483.500	28.43	5.83	39.92	47.33	41.67	54.00	12.33	Average
2483.636	28.43	5.83	39.92	46.08	40.42	54.00	13.58	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

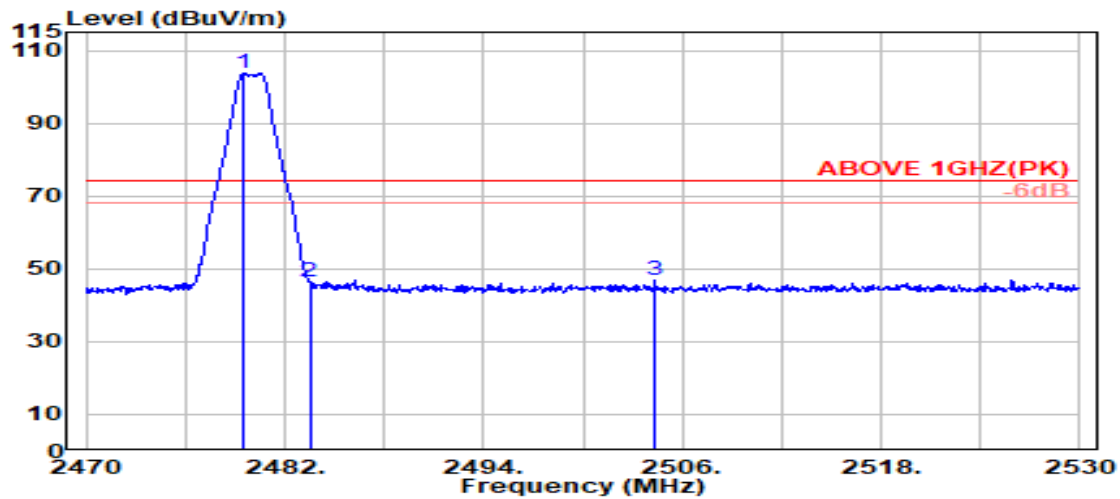

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.491	28.42	5.82	39.92	109.52	103.84	---	---	Peak
2483.500	28.43	5.83	39.92	51.89	46.23	74.00	27.77	Peak
2504.364	28.52	5.85	39.92	52.43	46.88	74.00	27.12	Peak

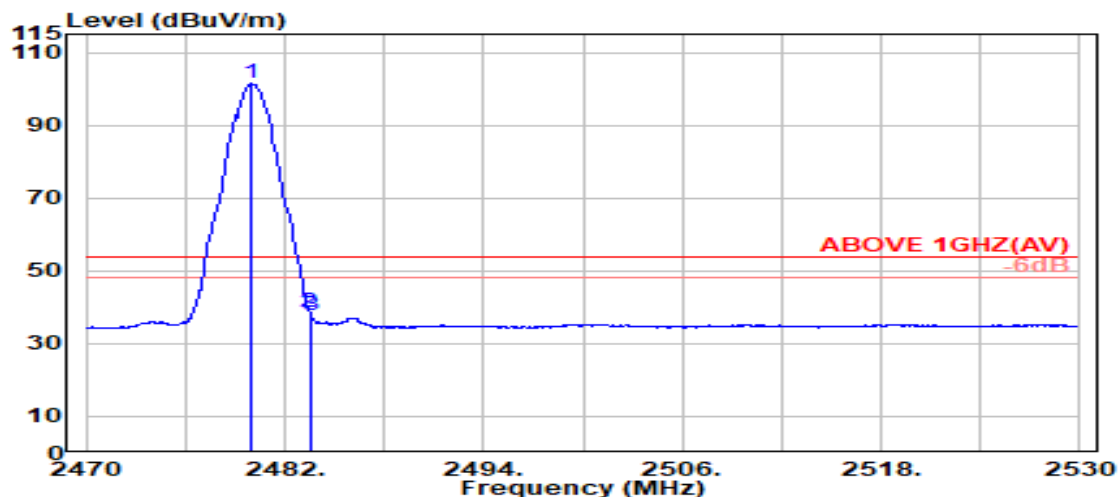

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.982	28.42	5.82	39.92	107.05	101.37	---	---	Average
2483.500	28.43	5.83	39.92	44.43	38.78	54.00	15.22	Average
2483.636	28.43	5.83	39.92	43.41	37.75	54.00	16.25	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

A.2.2 Emissions outside the frequency band

The emissions (up to 25GHz) not reported for there is no emission be found.

The 802.11ax and be were assessed with full RU mode.

● Wireless LAN Mode

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	40.69	42.35	54.00	11.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	46.09	47.75	54.00	6.25	Peak

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	42.28	44.25	54.00	9.75	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	43.05	45.02	54.00	8.98	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax:** +886 2 26099303

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	41.27	43.45	54.00	10.55	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	44.83	47.02	54.00	6.98	Peak

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	39.78	41.45	54.00	12.55	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	40.97	42.63	54.00	11.37	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	39.86	41.82	54.00	12.18	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	40.33	42.30	54.00	11.70	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax:** +886 2 26099303

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	41.58	43.76	54.00	10.24	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	40.18	42.36	54.00	11.64	Peak

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	40.65	42.32	54.00	11.68	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	40.65	42.31	54.00	11.69	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	41.04	43.01	54.00	10.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	41.85	43.82	54.00	10.18	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	41.32	43.50	54.00	10.50	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	40.56	42.75	54.00	11.25	Peak

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.16	39.88	41.65	54.00	12.35	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.16	40.75	42.51	54.00	11.49	Peak

Mode	802.11n-HT40	Frequency	TX 2442 MHz
------	--------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	41.28	43.25	54.00	10.75	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	42.17	44.13	54.00	9.87	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax:** +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.13	42.68	44.81	54.00	9.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.13	40.29	42.41	54.00	11.59	Peak

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	40.12	41.79	54.00	12.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	39.63	41.29	54.00	12.71	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	39.75	41.72	54.00	12.28	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	40.70	42.67	54.00	11.33	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax:** +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	41.52	43.70	54.00	10.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	40.60	42.78	54.00	11.22	Peak

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.16	40.85	42.62	54.00	11.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.16	40.92	42.68	54.00	11.32	Peak

Mode	802.11ax-HE40	Frequency	TX 2442 MHz
------	---------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	40.17	42.14	54.00	11.86	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	42.13	44.10	54.00	9.90	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.13	41.12	43.24	54.00	10.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.13	42.20	44.32	54.00	9.68	Peak

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	40.87	42.54	54.00	11.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	40.17	41.83	54.00	12.17	Peak

Mode	802.11be-EHT20	Frequency	TX 2442MHz
------	----------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	42.14	44.11	54.00	9.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	41.02	42.99	54.00	11.01	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax:** +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	40.57	42.75	54.00	11.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	40.47	42.65	54.00	11.35	Peak

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.16	39.88	41.64	54.00	12.36	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.16	40.58	42.34	54.00	11.66	Peak

Mode	802.11be-EHT40	Frequency	TX 2442 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	39.92	41.89	54.00	12.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	43.34	45.31	54.00	8.69	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.13	42.21	44.34	54.00	9.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.13	40.43	42.55	54.00	11.45	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● **BLE Mode**

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.72	8.02	39.18	39.91	41.47	54.00	12.53	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.72	8.02	39.18	41.20	42.76	54.00	11.24	Peak

Mode	BLE (2Mbps)	Frequency	TX 2440MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.02	8.08	39.15	39.80	41.75	54.00	12.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.02	8.08	39.15	40.71	42.66	54.00	11.34	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.22	8.13	39.12	40.32	42.56	54.00	11.44	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.22	8.13	39.12	42.19	44.43	54.00	9.57	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10-2020 & ANSI C63.10-2020 + COR.1-2023 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

A.3 DTS/OCCUPIED BANDWIDTH

Test Date	2025/10/21 ~ 23	Temp./Hum.	22~23°C/62~68%
Cable Loss	1.80dB	Tested By	Brian Hsieh
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1 DTS/Occupied Bandwidth Result

Mode	Centre Frequency (MHz)	DTS (6dB) Bandwidth (MHz)		Occupied (99%) Bandwidth (MHz)		Limit
		AUX	Main	AUX	Main	
802.11b	2412	9.087	9.006	13.446	13.449	>500kHz
	2442	9.086	9.020	13.489	13.478	
	2462	9.085	8.565	13.473	13.449	
	2472	9.086	9.031	13.451	13.443	
802.11g	2412	15.96	15.11	16.731	16.763	
	2442	16.09	15.12	16.818	16.700	
	2462	15.97	15.32	16.741	16.742	
	2472	16.41	16.37	16.379	16.390	
802.11n-HT20	2412	17.19	16.58	17.804	17.797	
	2442	17.13	16.58	17.795	17.791	
	2462	17.18	16.90	17.794	17.797	
	2472	17.63	17.68	17.560	17.583	
802.11n-HT40	2422	36.10	35.68	36.010	35.950	
	2442	36.01	35.50	35.966	35.969	
	2452	35.92	35.51	36.013	35.936	
	2462	36.46	36.45	36.146	36.093	
802.11ax-HE20	2412	18.66	18.83	18.957	18.941	
	2442	18.80	18.80	18.954	18.941	
	2462	18.69	18.86	18.935	18.974	
	2472	18.78	18.93	18.724	18.761	
802.11ax-HE40	2422	37.56	37.36	37.479	37.532	
	2442	37.52	36.86	37.514	37.521	
	2452	37.36	37.20	37.480	37.507	
	2462	37.86	37.69	37.572	37.528	
802.11be-EHT20	2412	18.86	18.78	18.946	18.964	
	2442	18.70	18.75	18.956	18.937	
	2462	18.55	18.79	18.952	18.987	
	2472	18.83	18.86	18.737	18.774	
802.11be-EHT40	2422	37.60	37.10	37.481	37.531	
	2442	37.46	37.44	37.492	37.499	
	2452	37.46	35.86	37.517	37.487	
	2462	37.89	37.80	37.540	37.612	

Note: We only presented the middle channel plots for each test mode.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	Centre Frequency (MHz)	DTS (6dB) Bandwidth (MHz)		Occupied (99%) Bandwidth (MHz)		Limit
		AUX	Main	AUX	Main	
BLE (1Mbps)	2402	0.6985	0.6995	1.0239	1.0254	>500kHz
	2440	0.7036	0.6914	1.0267	1.0236	
	2480	0.7018	0.7044	1.0285	1.0269	
BLE (2Mbps)	2402	1.170	1.167	2.0622	2.0599	
	2440	1.169	1.167	2.0581	2.0557	
	2480	1.169	1.172	2.0583	2.0594	
BLE (PHY Coded S2)	2402	0.6577	0.6579	1.0170	1.0177	
	2440	0.6586	0.6577	1.0198	1.0145	
	2480	0.6583	0.6574	1.0203	1.0198	
BLE (PHY Coded S8)	2402	0.6765	0.6803	1.0475	1.0472	
	2440	0.6828	0.6852	1.0514	1.0525	
	2480	0.6844	0.6828	1.0514	1.0518	

Note: We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.3.2 Measurement Plots


● DTS (6dB) Bandwidth






Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

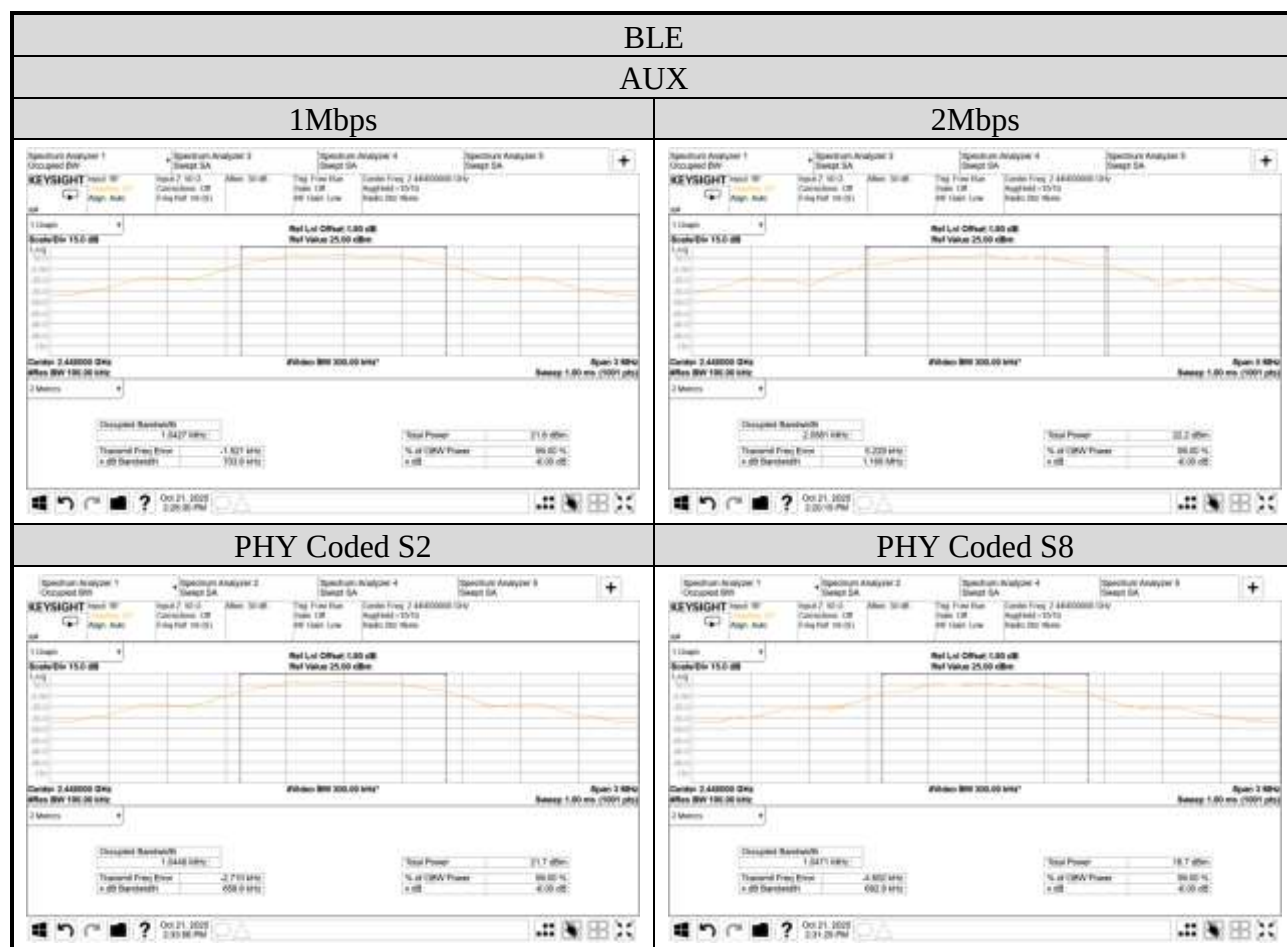

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

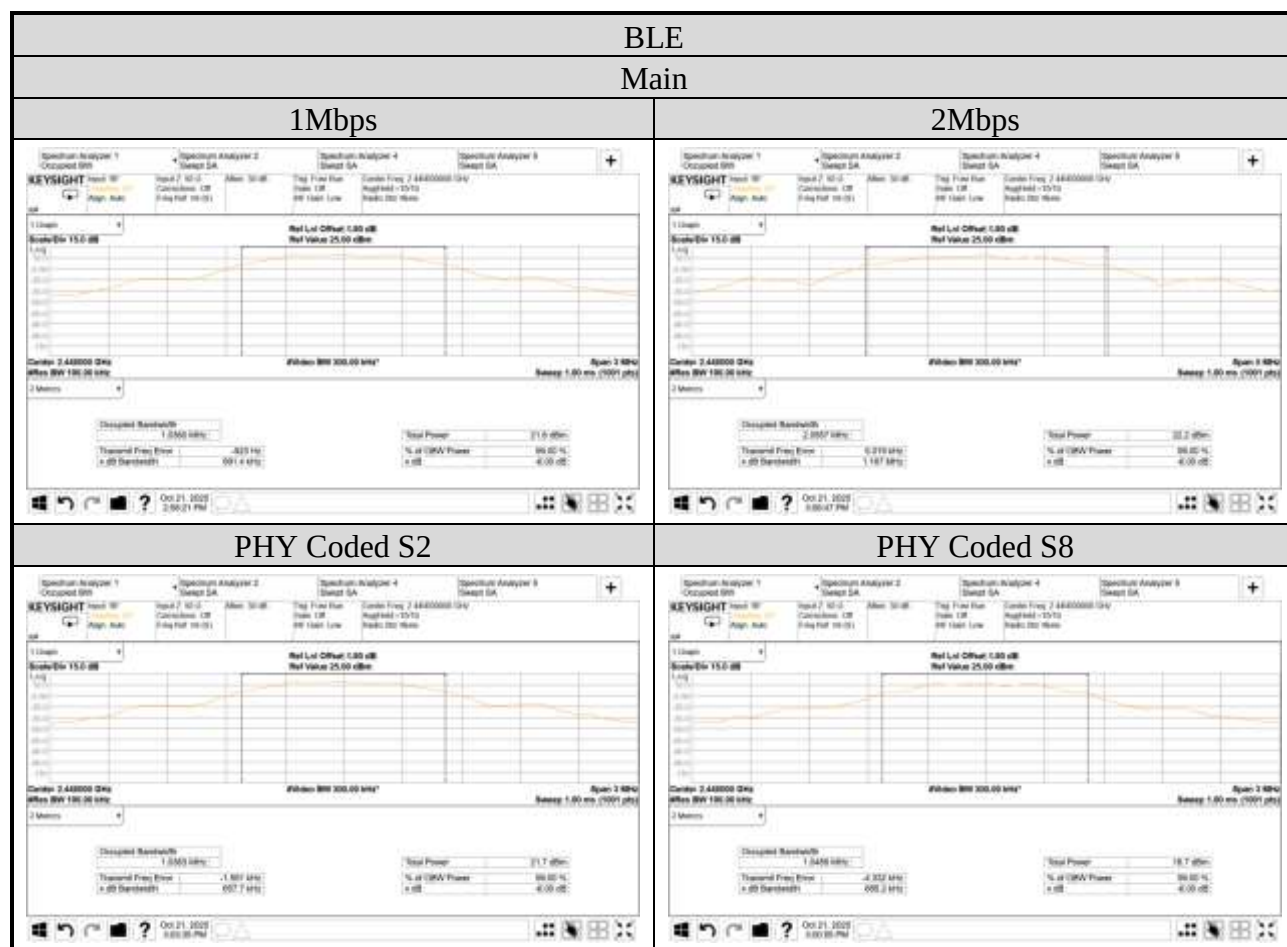

● Occupied (99%) Bandwidth



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303




Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

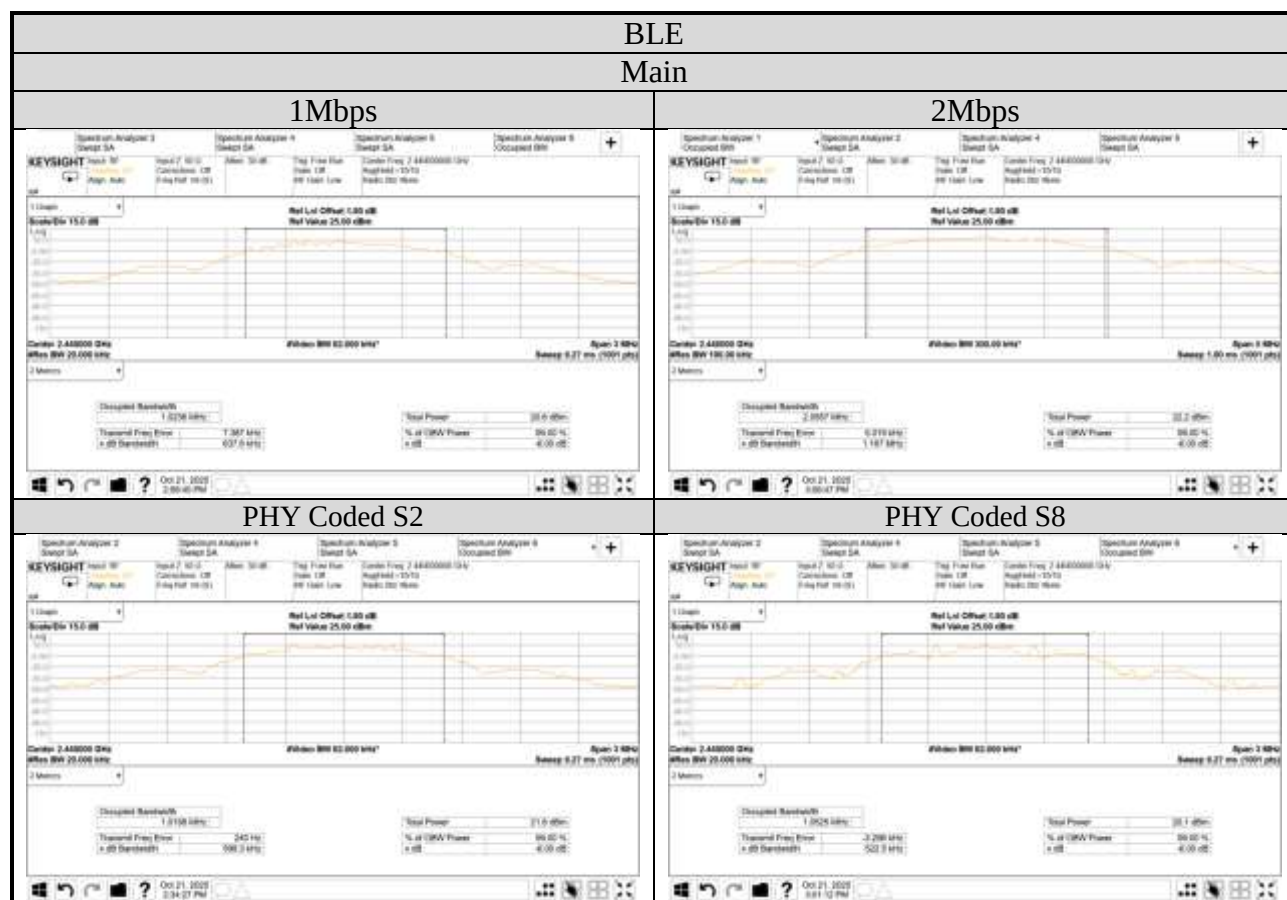

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.4 MAXIMUM PEAK OUTPUT POWER

Test Date	2025/09/18 ~ 10/20	Temp./Hum.	23~24°C/58~63%
Cable Loss	---	Tested By	Brian Hsieh
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.4.1 Peak Output Power

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max Peak Output Power		Antenna Gain (dBi)		E.I.R.P. ^{Note 2}		Limit
		Aux	Main	(dBm)	(W)	Aux	Main	(dBm)	(W)	
802.11b	2412	22.38	22.68	22.68	0.185	2.00	1.46	24.38	0.274	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P.)
	2417	19.79	22.22	22.22	0.167	2.00	1.46	23.68	0.233	
	2422	20.34	22.36	22.36	0.172	2.00	1.46	23.82	0.241	
	2442	22.47	22.70	22.70	0.186	2.00	1.46	24.47	0.280	
	2467	22.08	22.30	22.30	0.170	2.00	1.46	24.08	0.256	
	2472	19.24	20.31	20.31	0.107	2.00	1.46	21.77	0.150	
802.11g	2412	23.29	24.39	24.39	0.275	2.00	1.46	25.85	0.385	
	2417	24.69	25.41	25.41	0.348	2.00	1.46	26.87	0.486	
	2442	24.02	24.77	24.77	0.300	2.00	1.46	26.23	0.420	
	2462	25.02	25.48	25.48	0.353	2.00	1.46	27.02	0.504	
	2467	19.91	20.65	20.65	0.116	2.00	1.46	22.11	0.163	
	2472	24.12	24.45	24.45	0.279	2.00	1.46	26.12	0.409	

Note: 1. The results have been included cable loss.

2. E.I.R.P.= The Max. of Peak Output Power (AUX or Main)(dBm)+ Antenna Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power ^{Note 2}		Directional Gain ^{Note 3} (dBi)	E.I.R.P ^{Note 4}		Limit
		Aux	Main	(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	22.47	22.13	25.31	0.340	1.74	27.05	0.507	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2417	25.11	25.17	28.15	0.653	1.74	29.89	0.975	
	2442	23.79	24.63	27.24	0.530	1.74	28.98	0.791	
	2462	23.66	23.14	26.42	0.438	1.74	28.16	0.654	
	2467	18.64	18.22	21.45	0.139	1.74	23.19	0.208	
	2472	23.70	23.49	26.61	0.458	1.74	28.35	0.683	
802.11n-HT40	2422	22.99	22.89	25.95	0.394	1.74	27.69	0.588	
	2427	24.13	23.78	26.97	0.498	1.74	28.71	0.743	
	2432	23.80	24.36	27.10	0.513	1.74	28.84	0.765	
	2437	24.10	23.77	26.95	0.495	1.74	28.69	0.739	
	2442	23.70	24.20	26.97	0.497	1.74	28.71	0.743	
	2447	22.83	22.99	25.92	0.391	1.74	27.66	0.584	
	2452	23.20	23.63	26.43	0.440	1.74	28.17	0.656	
	2462	23.31	23.57	26.45	0.442	1.74	28.19	0.660	
802.11ax-HE20	2412	22.75	22.57	25.67	0.369	1.74	27.41	0.551	
	2417	25.22	25.46	28.35	0.684	1.74	30.09	1.021	
	2442	24.75	24.20	27.49	0.562	1.74	29.23	0.838	
	2462	23.37	23.51	26.45	0.442	1.74	28.19	0.659	
	2467	18.90	18.45	21.69	0.148	1.74	23.43	0.220	
	2472	23.04	23.30	26.18	0.415	1.74	27.92	0.620	
802.11ax-HE40	2422	22.66	23.37	26.04	0.402	1.74	27.78	0.600	
	2427	24.10	24.09	27.11	0.513	1.74	28.85	0.767	
	2432	24.00	24.15	27.09	0.511	1.74	28.83	0.763	
	2437	24.02	24.38	27.21	0.527	1.74	28.95	0.786	
	2442	24.09	23.98	27.05	0.506	1.74	28.79	0.756	
	2447	23.79	22.86	26.36	0.433	1.74	28.10	0.646	
	2452	23.05	23.59	26.34	0.430	1.74	28.08	0.642	
	2462	23.32	23.35	26.35	0.431	1.74	28.09	0.643	
802.11be-EHT20	2412	22.30	22.37	25.35	0.342	1.74	27.09	0.511	
	2417	24.61	24.87	27.75	0.596	1.74	29.49	0.890	
	2442	23.59	24.18	26.91	0.490	1.74	28.65	0.732	
	2462	23.66	23.08	26.39	0.436	1.74	28.13	0.650	
	2467	18.66	18.55	21.62	0.145	1.74	23.36	0.217	
	2472	23.21	22.48	25.87	0.386	1.74	27.61	0.577	
802.11be-EHT40	2422	23.10	23.37	26.25	0.421	1.74	27.99	0.629	
	2427	23.99	23.77	26.89	0.489	1.74	28.63	0.730	
	2432	24.70	24.24	27.49	0.561	1.74	29.23	0.837	
	2437	24.17	24.19	27.19	0.524	1.74	28.93	0.782	
	2442	23.76	24.46	27.13	0.517	1.74	28.87	0.772	
	2447	22.87	23.96	26.46	0.443	1.74	28.20	0.661	
	2452	23.02	23.51	26.28	0.425	1.74	28.02	0.634	
	2462	23.55	23.31	26.44	0.441	1.74	28.18	0.658	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{1.46/10} + 10^{2.00/10})/2] = 1.74$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	RU Configuration	Peak Output Power (dBm)		Total Peak Output Power ^{Note 2}		Directional Gain ^{Note3} (dBi)	E.I.R.P ^{Note4}		Limit
			Aux	Main	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	26/0	23.86	23.77	26.83	0.481	1.74	28.57	0.719	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
		52/37	23.61	23.39	26.51	0.448	1.74	28.25	0.669	
		106/53	23.69	23.66	26.69	0.466	1.74	28.43	0.696	
	2472	26/8	16.59	15.97	19.30	0.085	1.74	21.04	0.127	
		52/40	15.50	15.70	18.61	0.073	1.74	20.35	0.108	
		106/54	19.77	19.84	22.82	0.191	1.74	24.56	0.285	
802.11be-EHT20	2412	26/0	24.16	23.86	27.02	0.504	1.74	28.76	0.752	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
		52/37	23.39	23.66	26.54	0.451	1.74	28.28	0.673	
		106/53	23.96	23.77	26.88	0.487	1.74	28.62	0.727	
	2472	26/8	16.64	17.13	19.90	0.098	1.74	21.64	0.146	
		52/40	16.53	15.60	19.10	0.081	1.74	20.84	0.121	
		106/54	19.99	20.20	23.11	0.204	1.74	24.85	0.305	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{1.46/10} + 10^{2.00/10})/2] = 1.74$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power ^{Note 2}		Directional Gain ^{Note 3} (dBi)	E.I.R.P ^{Note 2}		Limit
		Aux	Main	(dBm)	(W)		(dBm)	(W)	
BLE (1Mbps)	2402	14.59	14.78	17.70	0.059	1.74	19.44	0.088	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2440	15.20	15.25	18.24	0.067	1.74	19.98	0.099	
	2480	14.79	15.69	18.27	0.067	1.74	20.01	0.100	
BLE (2Mbps)	2402	14.60	14.60	17.61	0.058	1.74	19.35	0.086	
	2440	14.92	15.05	18.00	0.063	1.74	19.74	0.094	
	2480	15.15	15.58	18.38	0.069	1.74	20.12	0.103	
BLE (PHY Coded S2)	2402	13.01	13.38	16.21	0.042	1.74	17.95	0.062	
	2440	13.39	13.46	16.44	0.044	1.74	18.18	0.066	
	2480	13.28	13.82	16.57	0.045	1.74	18.31	0.068	
BLE (PHY Coded S8)	2402	13.04	13.08	16.07	0.040	1.74	17.81	0.060	
	2440	13.08	13.79	16.46	0.044	1.74	18.20	0.066	
	2480	13.23	13.63	16.44	0.044	1.74	18.18	0.066	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{1.46/10} + 10^{2.00/10})/2] = 1.74$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.4.2 Average Output Power (Reporting only)

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Duty cycle factor (dB) $10 \log (1/x)$	Max Average Output Power		Antenna Gain (dBi)		E.I.R.P. ^{Note 2}		Limit
		Aux	Main		(dBm)	(W)	Aux	Main	(dBm)	(W)	
802.11b	2412	16.97	20.31	N/A	20.31	0.107	2.00	1.46	21.77	0.150	<30dBm (Maximum Peak Output Power)
	2417	17.31	20.53	N/A	20.53	0.113	2.00	1.46	21.99	0.158	
	2422	18.28	20.12	N/A	20.12	0.103	2.00	1.46	21.58	0.144	
	2442	20.28	20.64	N/A	20.64	0.116	2.00	1.46	22.28	0.169	
	2467	19.76	19.87	N/A	19.87	0.097	2.00	1.46	21.76	0.150	
	2472	16.92	18.10	N/A	18.10	0.065	2.00	1.46	19.56	0.090	
802.11g	2412	19.07	19.58	N/A	19.58	0.091	2.00	1.46	21.07	0.128	<36dBm (E.I.R.P.)
	2417	19.97	20.52	N/A	20.52	0.113	2.00	1.46	21.98	0.158	
	2442	18.89	20.31	N/A	20.31	0.107	2.00	1.46	21.77	0.150	
	2462	20.02	20.06	N/A	20.06	0.101	2.00	1.46	22.02	0.159	
	2467	15.28	15.97	N/A	15.97	0.040	2.00	1.46	17.43	0.055	
	2472	13.96	14.71	N/A	14.71	0.030	2.00	1.46	16.17	0.041	

Note: 1. The results have been included cable loss.

2. E.I.R.P.= The Max. of Peak Output Power (AUX or Main)(dBm)+ Antenna Gain (dBi).

3. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Duty cycle factor (dB) 10log (1/x)	Total Average Output Power ^{Note 2}		Directional Gain ^{Note 3} (dBi)	E.I.R.P ^{Note 4}		Limit
		Aux	Main		(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	16.94	17.55	N/A	20.27	0.106	1.74	22.01	0.159	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2417	20.19	19.94	N/A	23.08	0.203	1.74	24.82	0.303	
	2442	19.32	19.35	N/A	22.35	0.172	1.74	24.09	0.256	
	2462	18.85	18.43	N/A	21.66	0.146	1.74	23.40	0.219	
	2467	13.77	13.14	N/A	16.48	0.044	1.74	18.22	0.066	
	2472	12.35	11.71	N/A	15.05	0.032	1.74	16.79	0.048	
802.11n-HT40	2422	17.53	17.12	N/A	20.34	0.108	1.74	22.08	0.161	
	2427	18.49	18.35	N/A	21.43	0.139	1.74	23.17	0.208	
	2432	18.33	18.77	N/A	21.57	0.143	1.74	23.31	0.214	
	2437	18.75	18.01	N/A	21.41	0.138	1.74	23.15	0.206	
	2442	18.13	17.72	N/A	20.94	0.124	1.74	22.68	0.185	
	2447	17.41	17.26	N/A	20.35	0.108	1.74	22.09	0.162	
	2452	16.95	17.71	N/A	20.36	0.109	1.74	22.10	0.162	
802.11ax-HE20	2462	12.32	12.52	N/A	15.43	0.035	1.74	17.17	0.052	
	2412	16.69	17.24	N/A	19.98	0.100	1.74	21.72	0.149	
	2417	19.90	20.11	N/A	23.02	0.200	1.74	24.76	0.299	
	2442	18.93	19.01	N/A	21.98	0.158	1.74	23.72	0.236	
	2462	18.06	18.30	N/A	21.19	0.132	1.74	22.93	0.196	
	2467	13.22	13.58	N/A	16.41	0.044	1.74	18.15	0.065	
802.11ax-HE40	2472	12.72	12.23	N/A	15.49	0.035	1.74	17.23	0.053	
	2422	17.40	17.31	N/A	20.37	0.109	1.74	22.11	0.162	
	2427	17.98	17.83	N/A	20.92	0.123	1.74	22.66	0.184	
	2432	18.28	17.98	N/A	21.14	0.130	1.74	22.88	0.194	
	2437	18.62	18.42	N/A	21.53	0.142	1.74	23.27	0.212	
	2442	18.24	18.23	N/A	21.25	0.133	1.74	22.99	0.199	
	2447	17.38	17.07	N/A	20.24	0.106	1.74	21.98	0.158	
	2452	17.13	17.38	N/A	20.27	0.106	1.74	22.01	0.159	
802.11be-EHT20	2462	12.44	12.26	N/A	15.36	0.034	1.74	17.10	0.051	
	2412	17.40	16.98	N/A	20.21	0.105	1.74	21.95	0.157	
	2417	19.79	20.23	N/A	23.03	0.201	1.74	24.77	0.300	
	2442	18.86	18.97	N/A	21.93	0.156	1.74	23.67	0.233	
	2462	18.68	18.64	N/A	21.67	0.147	1.74	23.41	0.219	
	2467	13.70	13.25	N/A	16.49	0.045	1.74	18.23	0.067	
802.11be-EHT40	2472	12.13	12.13	N/A	15.14	0.033	1.74	16.88	0.049	
	2422	17.18	17.11	N/A	20.16	0.104	1.74	21.90	0.155	
	2427	18.69	17.99	N/A	21.36	0.137	1.74	23.10	0.204	
	2432	17.90	18.41	N/A	21.17	0.131	1.74	22.91	0.196	
	2437	18.28	17.91	N/A	21.11	0.129	1.74	22.85	0.193	
	2442	18.17	17.91	N/A	21.05	0.127	1.74	22.79	0.190	
	2447	17.71	16.91	N/A	20.34	0.108	1.74	22.08	0.161	
	2452	17.28	17.06	N/A	20.18	0.104	1.74	21.92	0.156	
	2462	12.52	12.45	N/A	15.50	0.035	1.74	17.24	0.053	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{1.46/10} + 10^{2.00/10})/2] = 1.74 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Average Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	RU Configuration	Average Output Power(dBm)		Duty cycle factor (dB) 10log (1/x)	Total Average Output Power ^{Note 2}		Directional Gain ^{Note3} (dBi)	E.I.R.P ^{Note4}		Limit
			Aux	Main		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	26/0	20.11	19.20	0	22.69	0.186	1.74	24.43	0.277	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
		52/37	19.98	19.43	0	22.72	0.187	1.74	24.46	0.280	
		106/53	19.74	19.75	0	22.76	0.189	1.74	24.50	0.282	
	2472	26/8	3.23	2.20	0	5.76	0.004	1.74	7.50	0.006	
		52/40	2.10	2.11	0	5.12	0.003	1.74	6.86	0.005	
		106/54	8.23	8.15	0	11.20	0.013	1.74	12.94	0.020	
802.11be-EHT20	2412	26/0	19.45	19.01	0	22.25	0.168	1.74	23.99	0.250	<36dBm (E.I.R.P)
		52/37	19.67	19.74	0	22.72	0.187	1.74	24.46	0.279	
		106/53	19.88	19.65	0	22.78	0.190	1.74	24.52	0.283	
	2472	26/8	2.77	2.79	0	5.79	0.004	1.74	7.53	0.006	
		52/40	2.08	1.65	0	4.88	0.003	1.74	6.62	0.005	
		106/54	8.12	8.04	0	11.09	0.013	1.74	12.83	0.019	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{1.46/10} + 10^{2.00/10})/2] = 1.74$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Average Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Average Output Power(dBm)		Duty cycle factor (dB) 10log (1/α)	Total Average Output Power ^{No 1& 2}		Directional Gain ^{No 1& 3} (dBi)	E.I.R.P ^{No 1& 4}		Limit
		Aux	Main		(dBm)	(W)		(dBm)	(W)	
BLE (1Mbps)	2402	12.39	12.57	0.737	16.23	0.042	1.74	17.97	0.063	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2440	13.04	12.59	0.737	16.57	0.045	1.74	18.31	0.068	
	2480	13.11	12.62	0.737	16.62	0.046	1.74	18.36	0.069	
BLE (2Mbps)	2402	9.84	9.86	2.487	15.35	0.034	1.74	17.09	0.051	
	2440	10.56	10.94	2.487	16.25	0.042	1.74	17.99	0.063	
	2480	10.11	10.49	2.487	15.80	0.038	1.74	17.54	0.057	
BLE (PHY Coded S2)	2402	10.78	10.68	0.438	14.18	0.026	1.74	15.92	0.039	
	2440	10.78	10.81	0.438	14.24	0.027	1.74	15.98	0.040	
	2480	10.66	10.84	0.438	14.20	0.026	1.74	15.94	0.039	
BLE (PHY Coded S8)	2402	11.97	12.19	0.132	15.22	0.033	1.74	16.96	0.050	
	2440	12.59	12.70	0.132	15.79	0.038	1.74	17.53	0.057	
	2480	12.28	12.56	0.132	15.56	0.036	1.74	17.30	0.054	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{1.46/10} + 10^{2.00/10})/2] = 1.74 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).


4. E.I.R.P.= The Total Average Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


A.5 EMISSION LIMITATIONS

Test Date	2025/10/21 ~ 23	Temp./Hum.	22~23°C/62~68%
Cable Loss	1.80dB	Tested By	Brian Hsieh
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

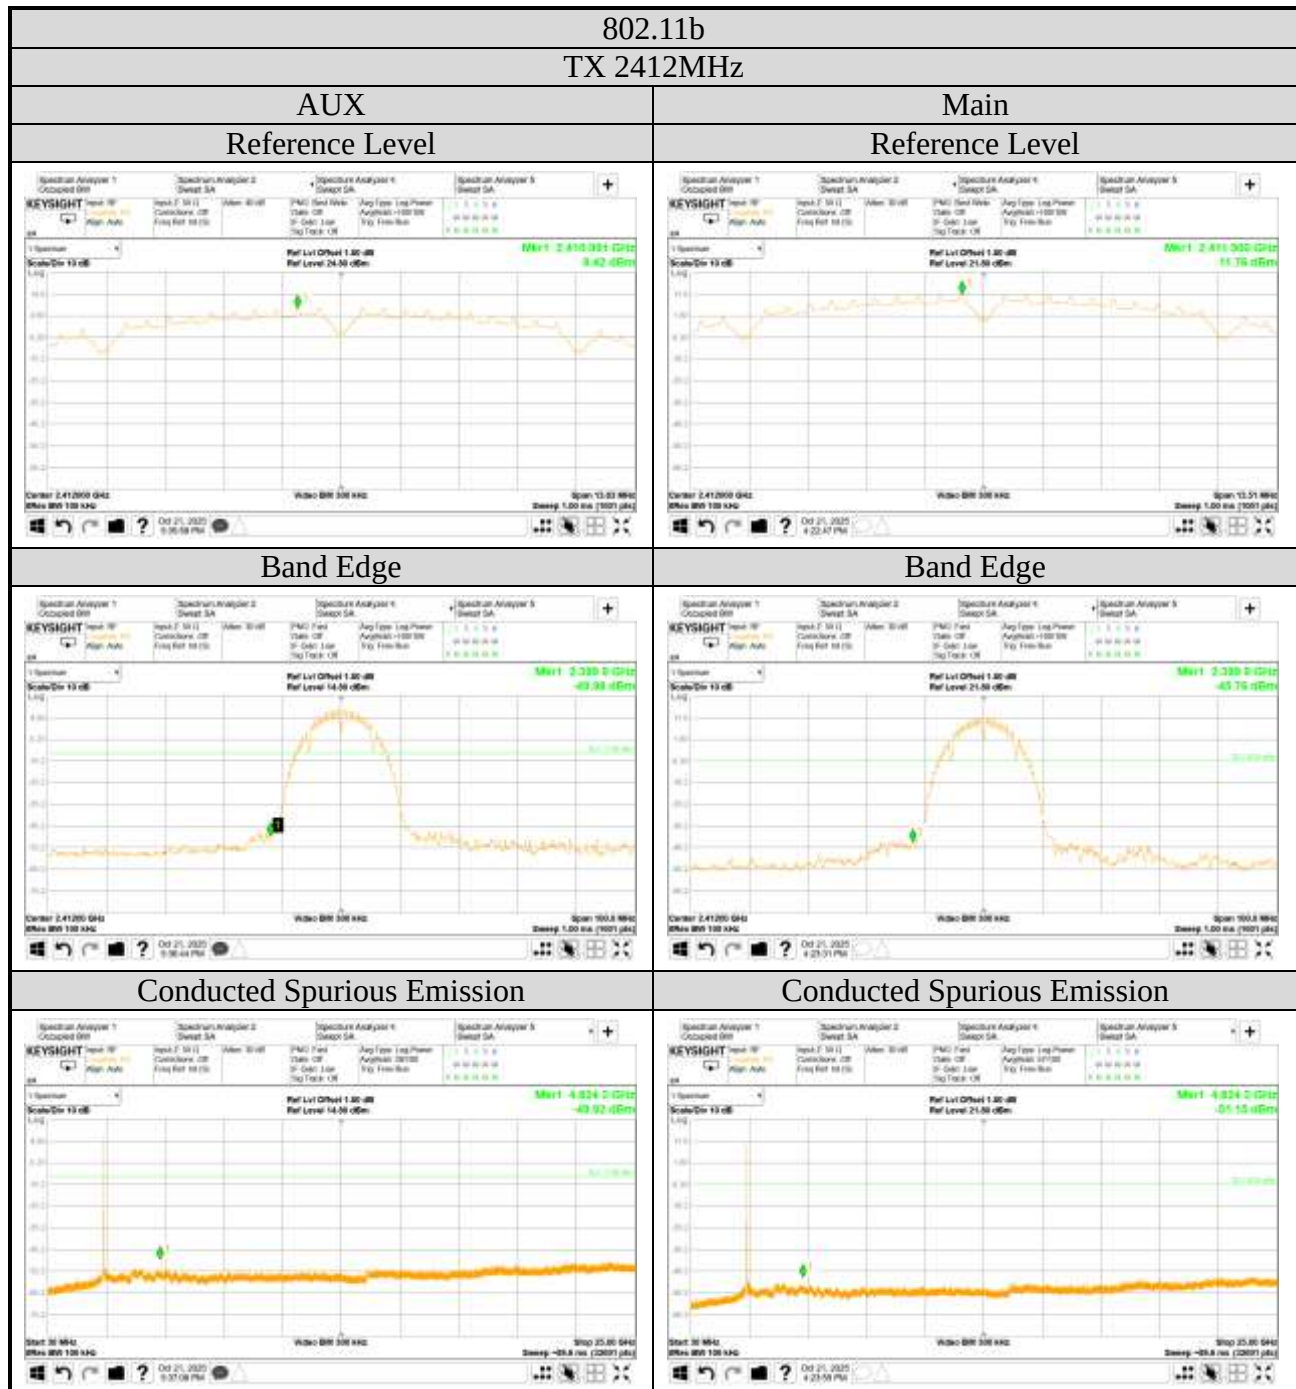


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

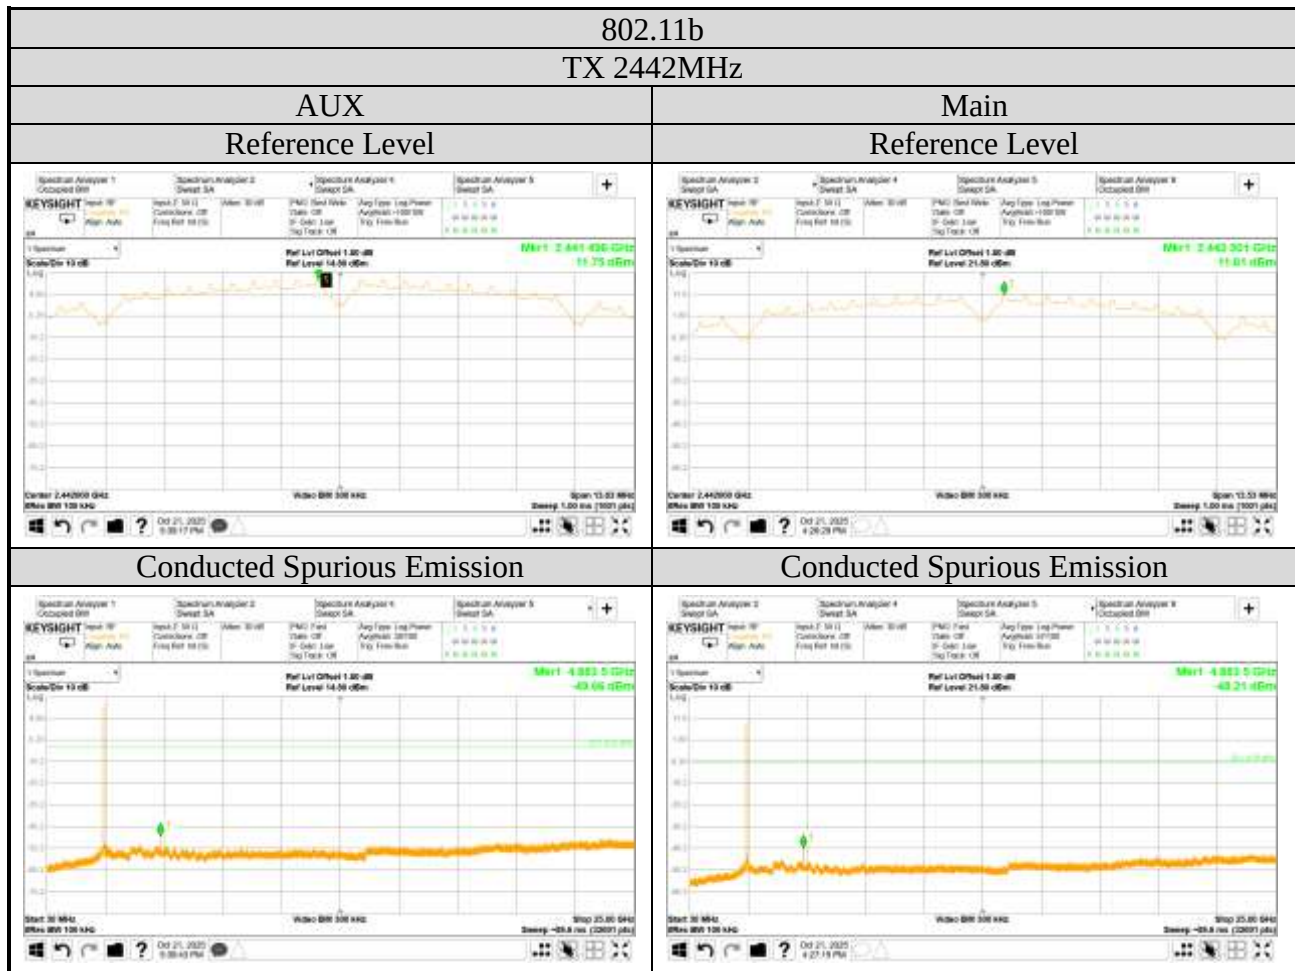


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

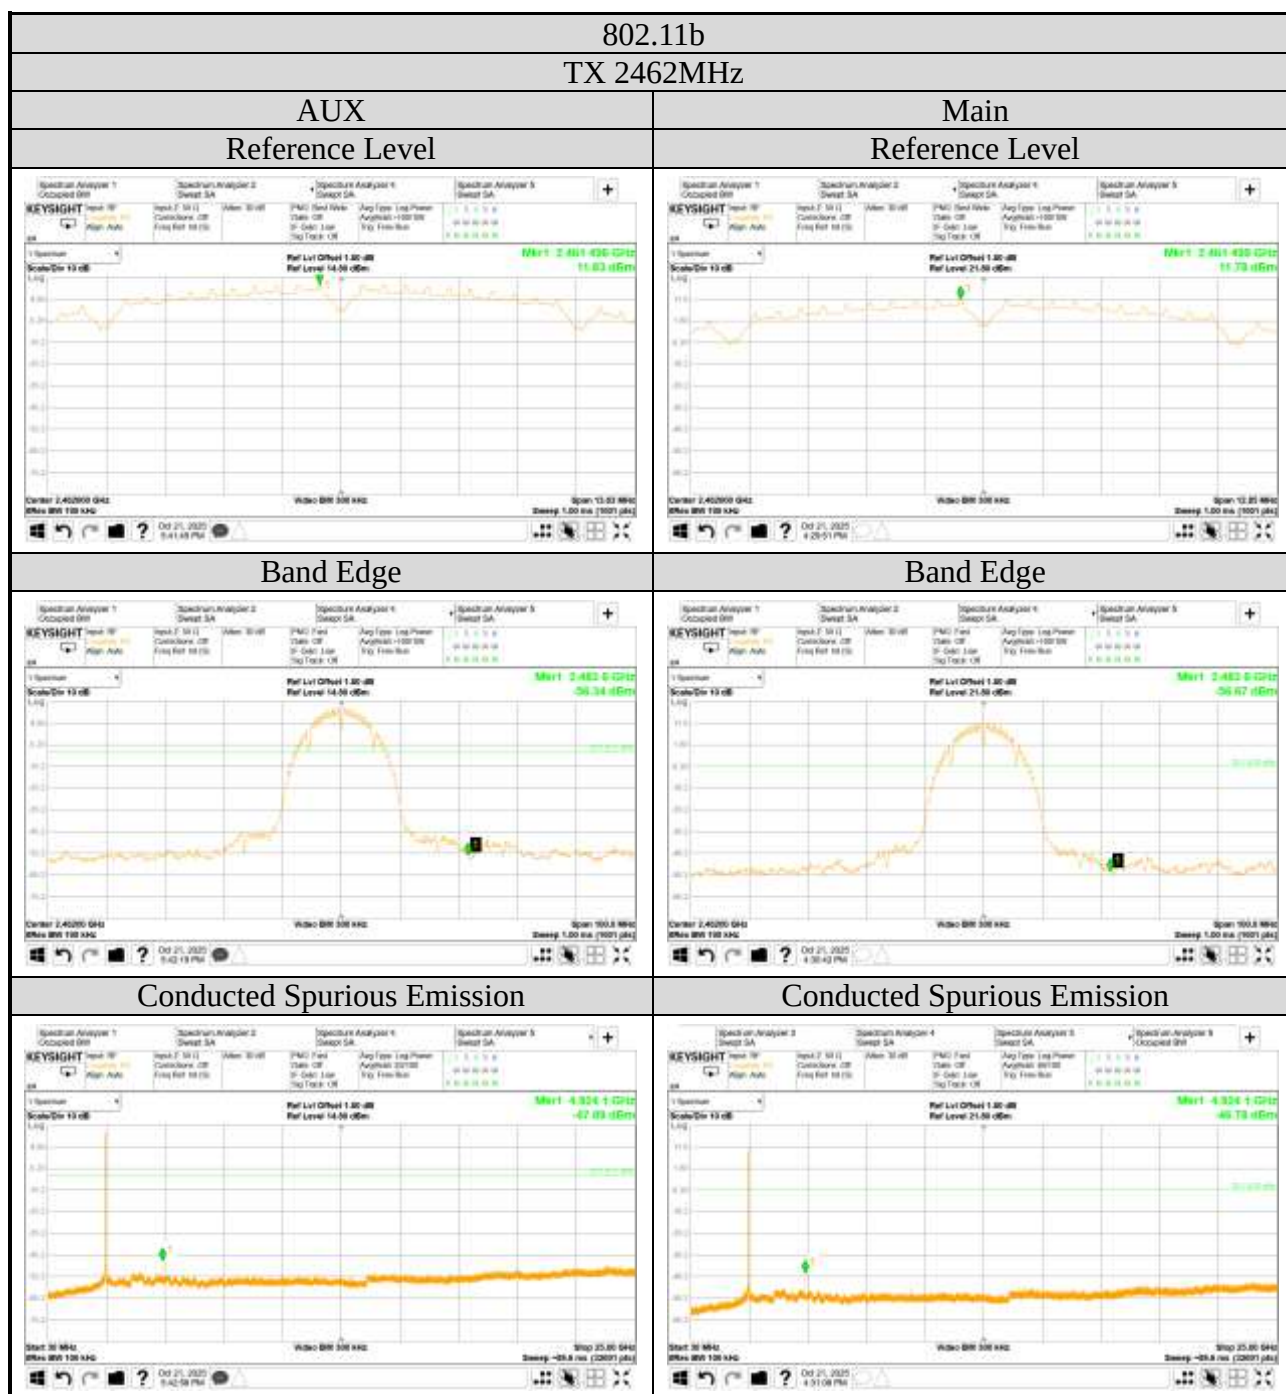


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

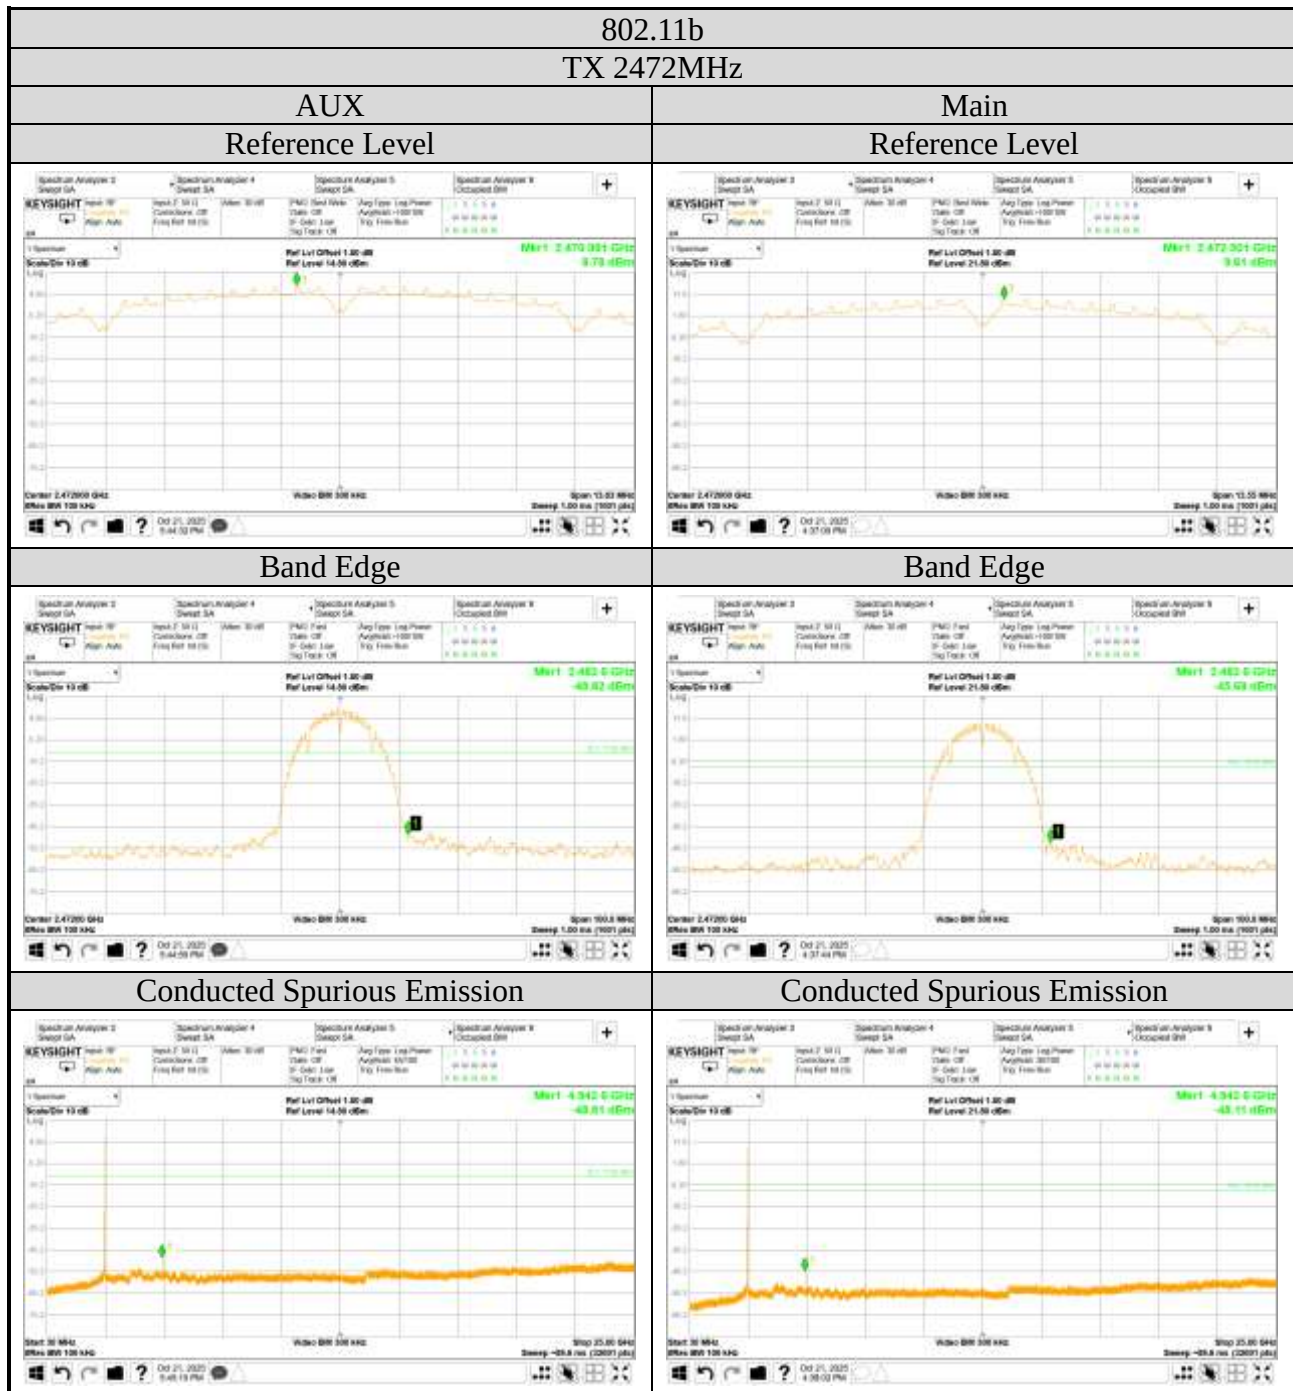


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

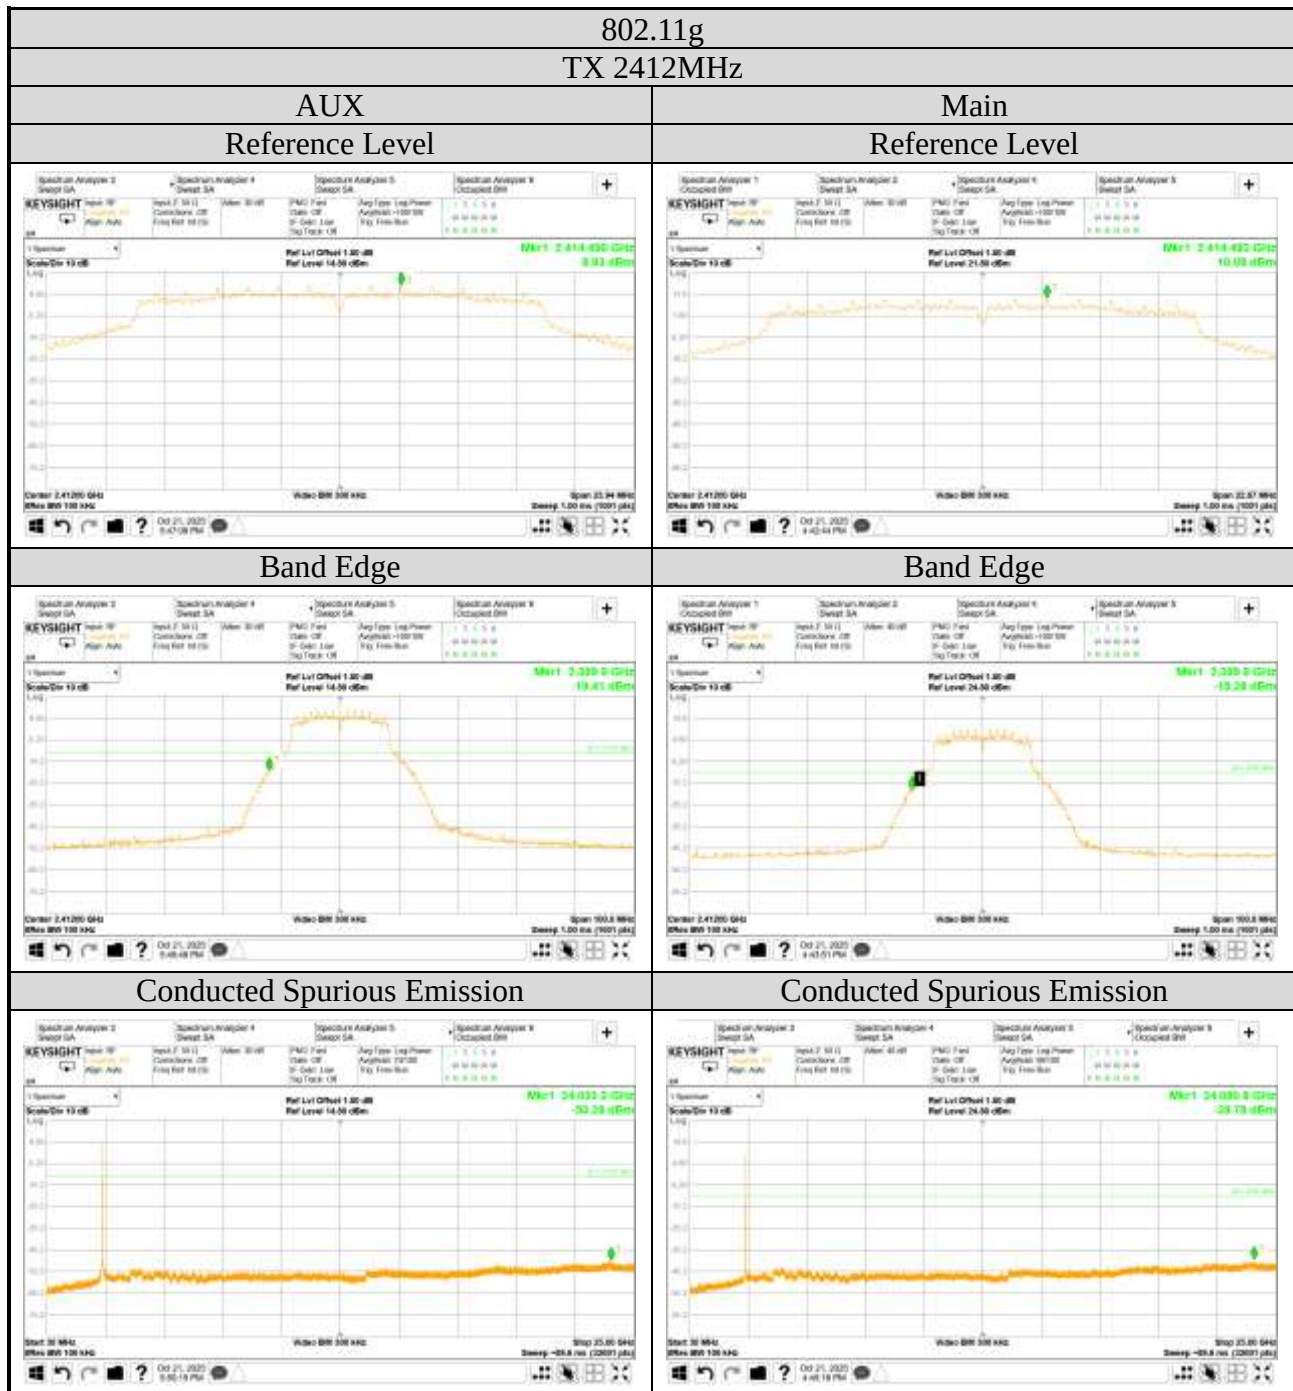


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

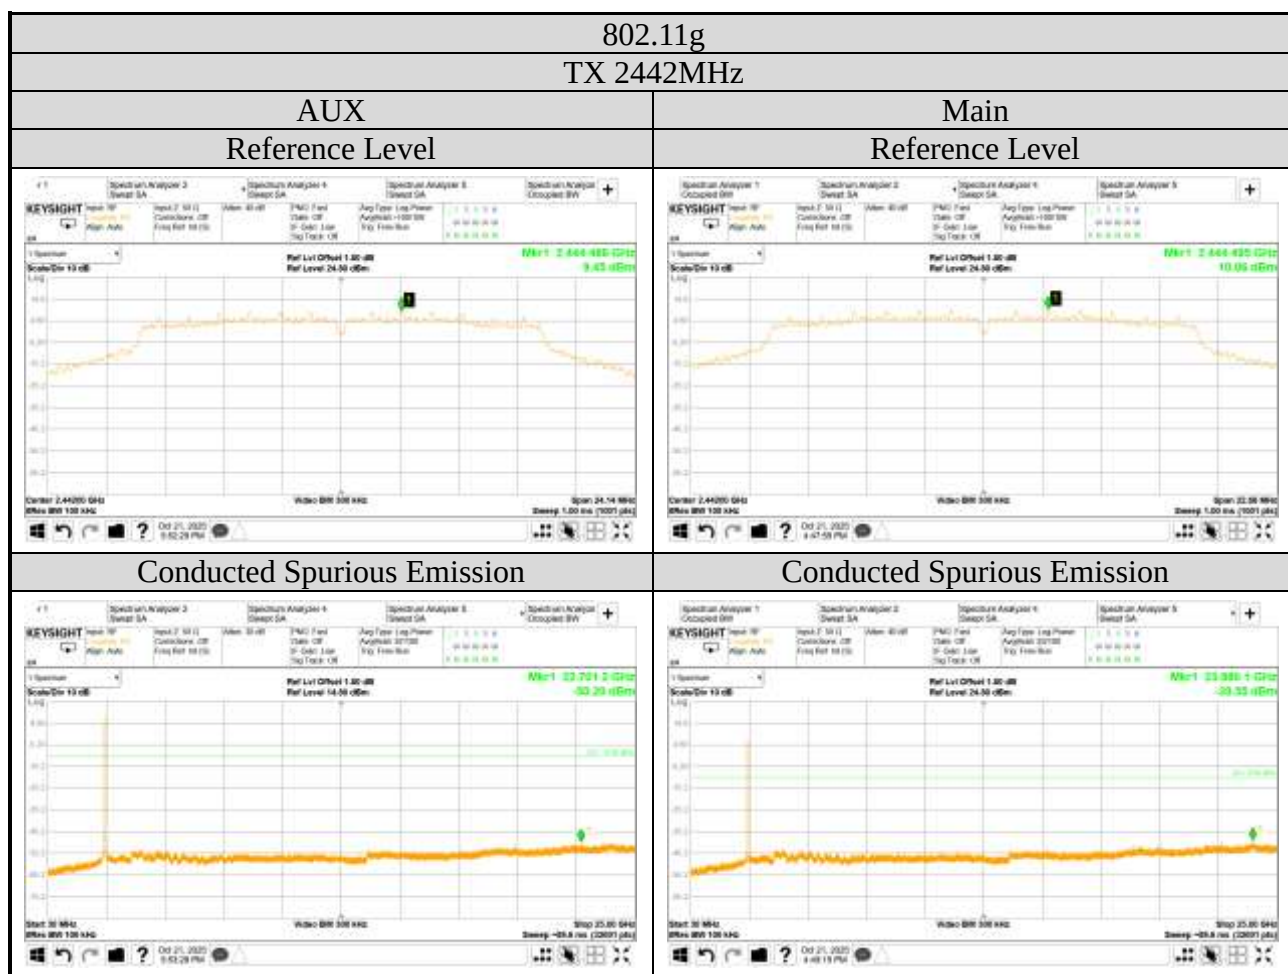

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

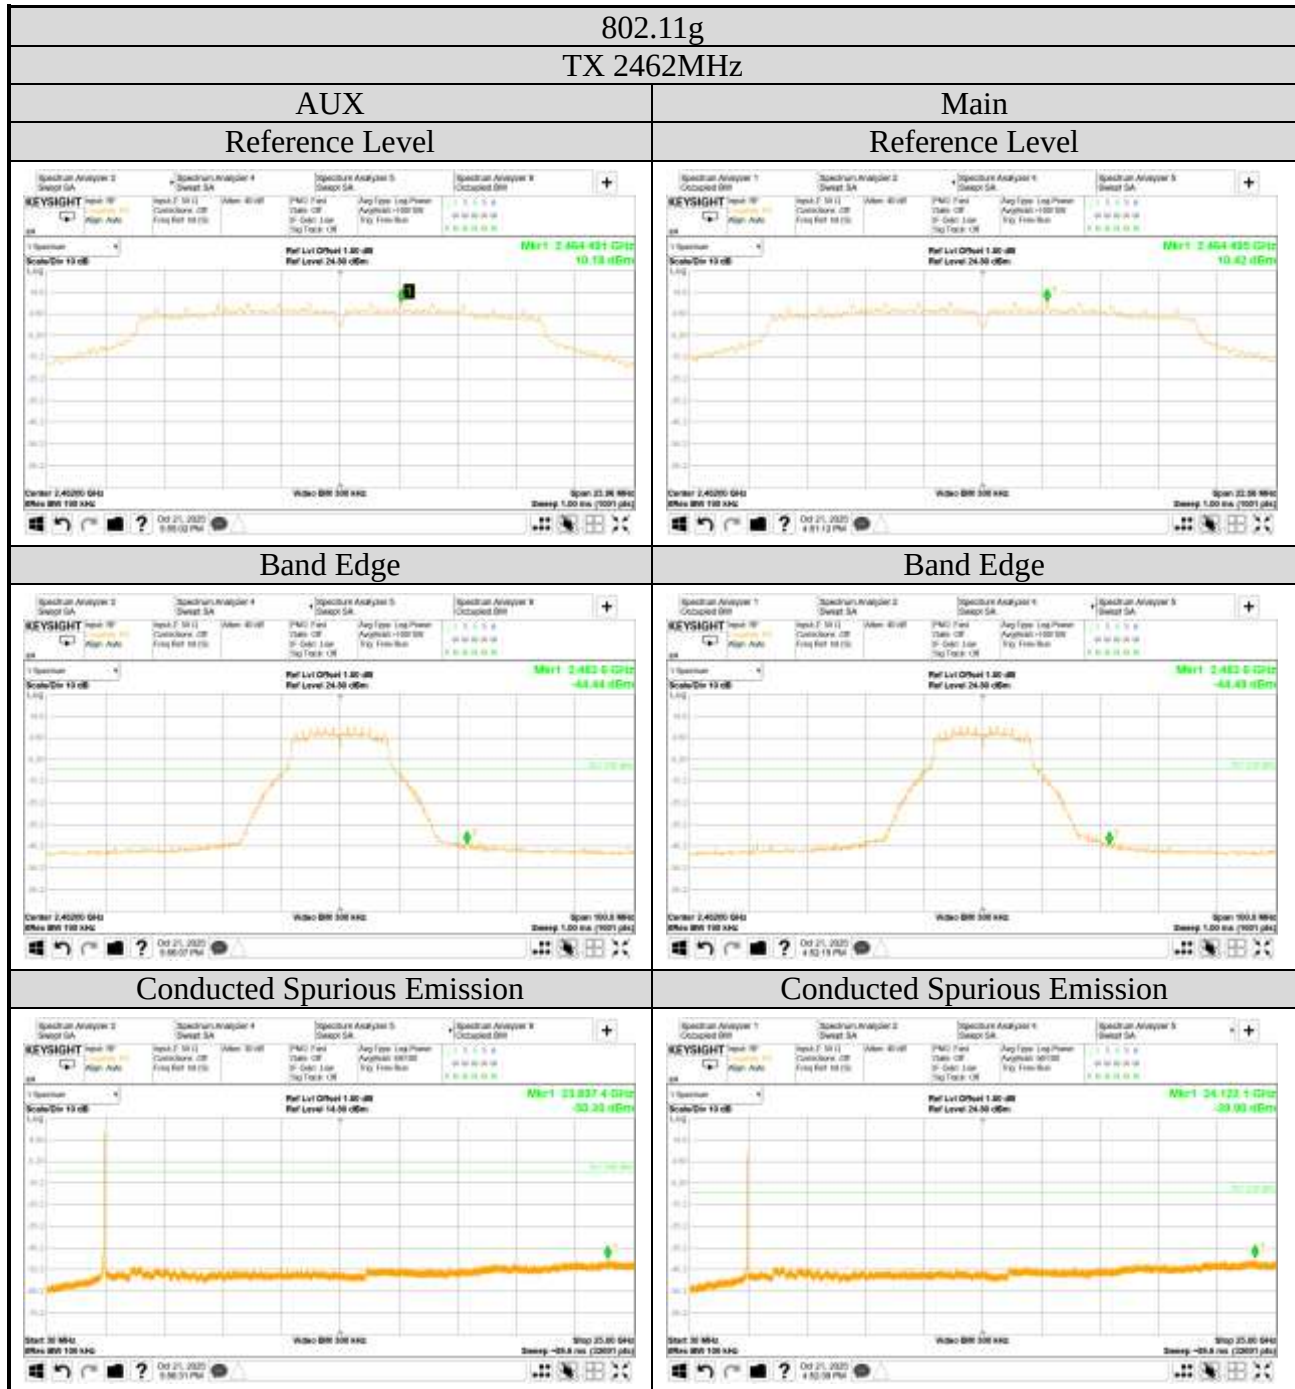

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

