



TEST REPORT

Applicant: DongGuanShi WeizhiChuang Technology Co., Ltd

Address of Applicant: Room 801, Building 5, No.1Fengjing Road, Daping, Tangxia Town,Dongguan City, Guangdong Province, China

Manufacturer/Factory: DongGuanShi WeizhiChuang Technology Co., Ltd

Address of Manufacturer/Factory: Room 801, Building 5, No.1Fengjing Road, Daping, Tangxia Town,Dongguan City, Guangdong Province, China

Equipment Under Test (EUT)

Product Name: Mobile Power Wireless Charging

Model No.: W202

FCC ID: 2A4WMWZC-W202

Applicable standards: FCC CFR Title 47 Part 15 Subpart C

Date of sample receipt: 2022-12-08

Date of Test: 2022-12-09 to 2022-12-13

Date of report issued: 2022-12-14

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Luo

Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	2022-12-14	Original

Prepared By:




Date:

2022-12-14

Project Engineer

Check By:



Date:

2022-12-14

Reviewer

3 Contents

Page

1	COVER PAGE.....	1
2	VERSION.....	2
3	CONTENTS.....	3
4	TEST SUMMARY.....	4
4.1	MEASUREMENT UNCERTAINTY.....	4
5	GENERAL INFORMATION.....	5
5.1	GENERAL DESCRIPTION OF EUT.....	5
5.2	TEST MODE.....	6
5.3	DESCRIPTION OF SUPPORT UNITS.....	6
5.4	TEST FACILITY.....	6
5.5	TEST LOCATION.....	6
5.6	OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	6
6	TEST INSTRUMENTS LIST.....	7
7	TEST RESULTS AND MEASUREMENT DATA.....	8
7.1	ANTENNA REQUIREMENT.....	8
7.2	CONDUCTED EMISSIONS.....	9
7.3	SPURIOUS EMISSION.....	12
7.4	20dB OCCUPY BANDWIDTH.....	18
8	TEST SETUP PHOTO.....	19
9	EUT CONSTRUCTIONAL DETAILS.....	19

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Spurious Emission	15.209(a)(f)	Pass
20dB Bandwidth	15.215	Pass

Pass: The EUT complies with the essential requirements in the standard.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz-30MHz	3.1dB	(1)
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Mobile Power Wireless Charging
Model No.:	W202
Serial No.:	N/A
Hardware version:	V1.0
Software version:	V1.0
Test sample(s) ID:	GTSL202212000078-1
Sample(s) Status	Engineer sample
Operation Frequency:	115kHz ~ 205KHz
Number of Frequency:	1Channels
Modulation type:	MSK
Antenna Type:	Inductive loop coil Antenna
Antenna gain:	0dBi
Power supply:	Input: DC 5V/2.4A Wireless charging: 7.5W

5.2 Test mode

Wireless charging mode	Keep the EUT in wireless charging status.
------------------------	---

5.3 Description of Support Units

Manufacturer	Description	Model	S/N
XIAOMI	USB Charger	MDY-10-EH	N/A
YBZ	Intelligent wireless charging full function test module	001	N/A

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC—Registration No.: 381383**

Designation Number: CN5029

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.

- **IC —Registration No.: 9079A**

CAB identifier: CN0091

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5.6 Other Information Requested by the Customer

None.

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 02, 2020	July 01, 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	April 22, 2022	April 21, 2023
4	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov. 29, 2022	Nov. 28, 2023
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	March 21, 2022	March 20, 2023
6	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	April 22, 2022	April 21, 2023
7	Coaxial Cable	GTS	N/A	GTS213	April 22, 2022	April 21, 2023
8	Coaxial Cable	GTS	N/A	GTS211	April 22, 2022	April 21, 2023
9	Coaxial cable	GTS	N/A	GTS210	April 22, 2022	April 21, 2023

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May 14, 2022	May 13, 2025
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April 24, 2022	April 23, 2023
3	ENV216 2-L-V- NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	April 22, 2022	April 21, 2023
4	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Spectrum Analyzer	Agilent	E4440A	GTS533	April 22, 2022	April 21, 2023

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	April 25, 2022	April 24, 2023
2	Barometer	KUMAO	SF132	GTS647	July 26, 2022	July 25, 2023

7 Test results and Measurement Data

7.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is Inductive loop coil Antenna, reference to the appendix II for details.	


7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207																			
Test Method:	ANSI C63.10:2013																			
Test Frequency Range:	150KHz to 30MHz																			
Class / Severity:	Class B																			
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																			
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> * Decreases with the logarithm of the frequency.						Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																			
	Quasi-peak	Average																		
0.15-0.5	66 to 56*	56 to 46*																		
0.5-5	56	46																		
5-30	60	50																		
Test setup:	Reference Plane Remark: E.U.T.: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m																			
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.																			
Test Instruments:	Refer to section 6.0 for details																			
Test mode:	Refer to section 5.2 for details																			
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar														
Test voltage:	AC 120V, 60Hz																			
Test results:	Pass																			

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.


Measurement data:

Line:

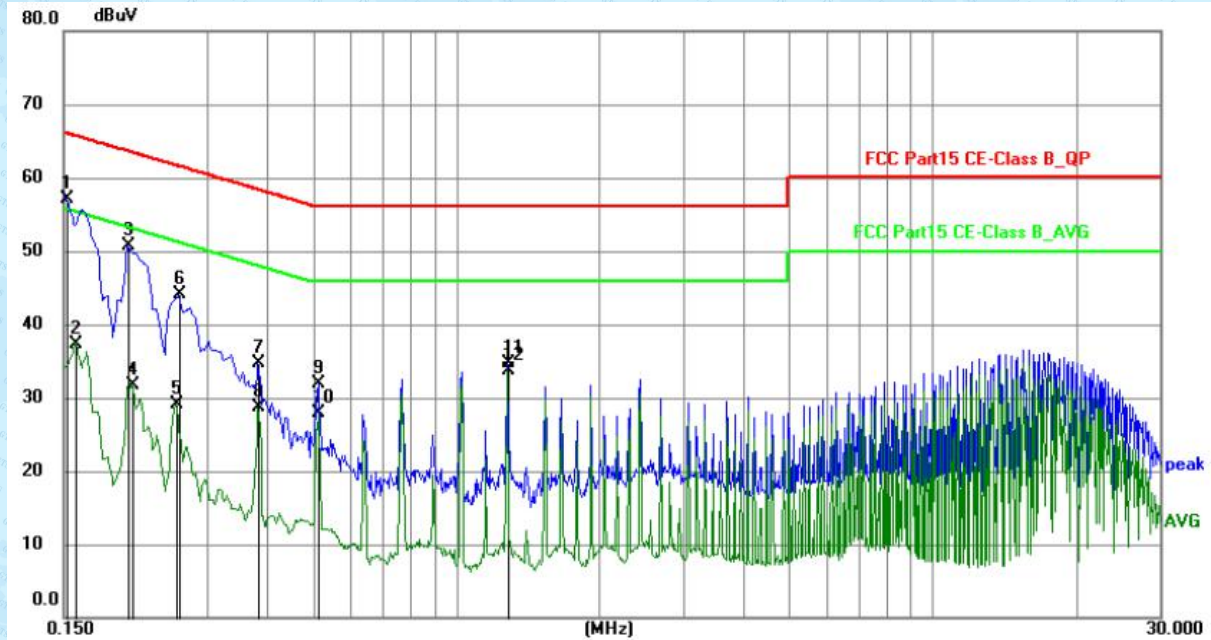

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1516	47.29	9.83	57.12	65.91	-8.79	QP	P
2	0.1590	27.58	9.82	37.40	55.52	-18.12	AVG	P
3	0.2040	40.94	9.76	50.70	63.45	-12.75	QP	P
4	0.2085	22.04	9.76	31.80	53.26	-21.46	AVG	P
5	0.2580	19.37	9.74	29.11	51.50	-22.39	AVG	P
6	0.2625	34.35	9.74	44.09	61.35	-17.26	QP	P
7	0.3840	24.89	9.73	34.62	58.19	-23.57	QP	P
8	0.3840	18.93	9.73	28.66	48.19	-19.53	AVG	P
9	0.5144	22.29	9.71	32.00	56.00	-24.00	QP	P
10	0.5144	18.25	9.71	27.96	46.00	-18.04	AVG	P
11	1.2839	25.10	9.66	34.76	56.00	-21.24	QP	P
12	1.2839	24.02	9.66	33.68	46.00	-12.32	AVG	P

Neutral:

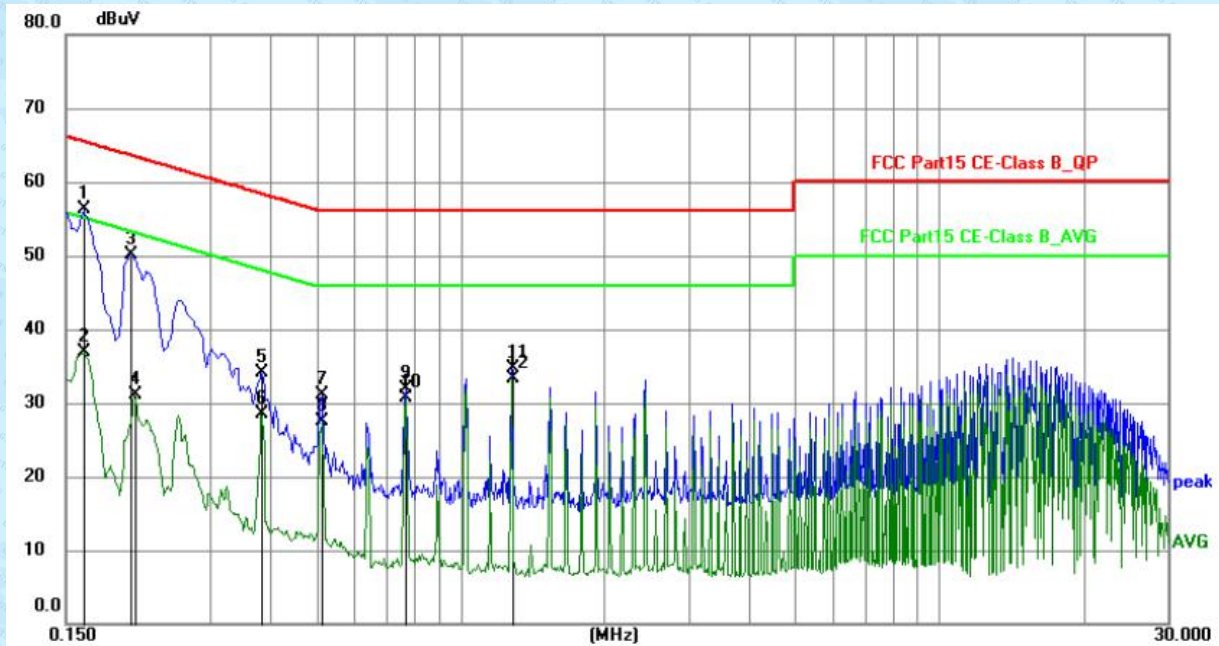



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1635	46.44	9.79	56.23	65.28	-9.05	QP	P
2	0.1635	27.14	9.79	36.93	55.28	-18.35	AVG	P
3	0.2040	40.32	9.75	50.07	63.45	-13.38	QP	P
4	0.2085	21.28	9.75	31.03	53.26	-22.23	AVG	P
5	0.3840	24.44	9.73	34.17	58.19	-24.02	QP	P
6	0.3840	18.78	9.73	28.51	48.19	-19.68	AVG	P
7	0.5144	21.43	9.71	31.14	56.00	-24.86	QP	P
8	0.5144	17.88	9.71	27.59	46.00	-18.41	AVG	P
9	0.7710	22.28	9.69	31.97	56.00	-24.03	QP	P
10	0.7710	21.03	9.69	30.72	46.00	-15.28	AVG	P
11	1.2839	25.01	9.66	34.67	56.00	-21.33	QP	P
12	1.2839	23.57	9.66	33.23	46.00	-12.77	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss

7.3 Spurious Emission

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 1GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	10Hz	Average Value
Remark: For the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission test in these three bands are based on measurements employing an average detector.					
Limit: (Spurious Emissions)	Limits for frequency below 30MHz				
	Frequency	Limit (uV/m)	Measurement Distance(m)	Remark	
	0.009-0.490	2400/F(kHz)	300	Quasi-peak Value	
	0.490-1.705	24000/F(kHz)	30	Quasi-peak Value	
	1.705-30	30	30	Quasi-peak Value	
	Limits for frequency Above 30MHz				
	Frequency	Limit (dBuV/m @3m)	Remark		
	30MHz-88MHz	40.00	Quasi-peak Value		
	88MHz-216MHz	43.50	Quasi-peak Value		
	216MHz-960MHz	46.00	Quasi-peak Value		
960MHz-1GHz	54.00	Quasi-peak Value			
Above 1GHz	54.00	Average Value			
	74.00	Peak Value			
Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.					
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the				

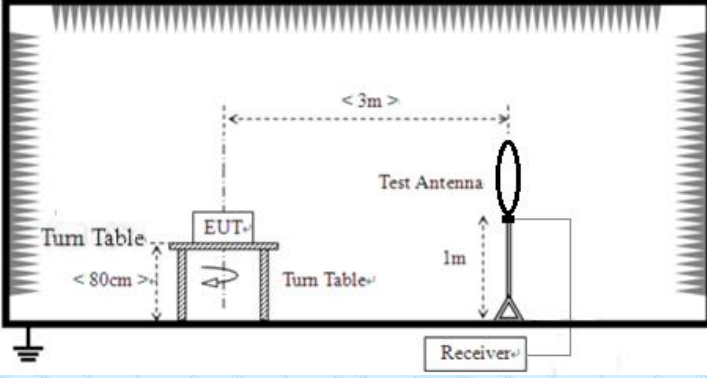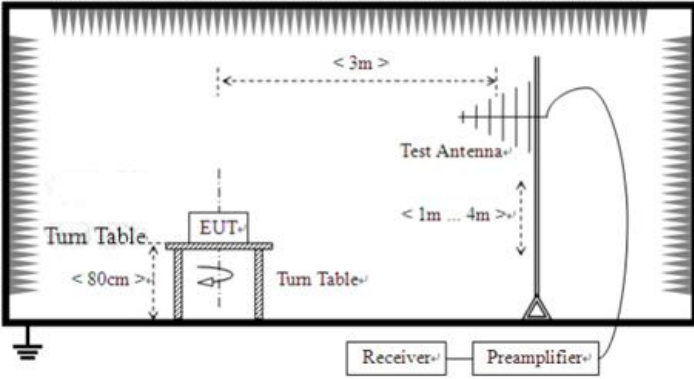
	EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.					
Test setup:	Below 30MHz  30MHz ~ 1000MHz 					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Measurement data:

Note: Limit dBuV/m @3m = Limit dBuV/m @300m+ 80

Limit dBuV/m @3m = Limit dBuV/m @30m + 40

9kHz~150kHz

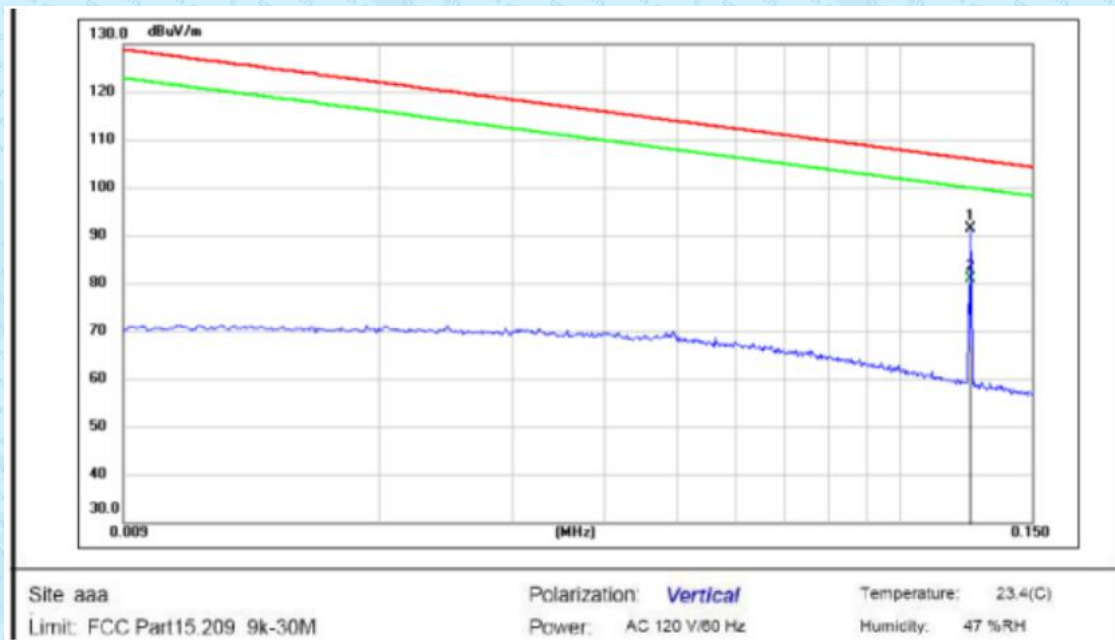


Mode: Mobile Power Wireless Charging

Note:

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.124200	77.64	13.74	91.38	105.95	-14.57	peak
2	0.124200	67.24	13.74	80.98	105.95	-24.97	AVG

150kHz-30MHz:

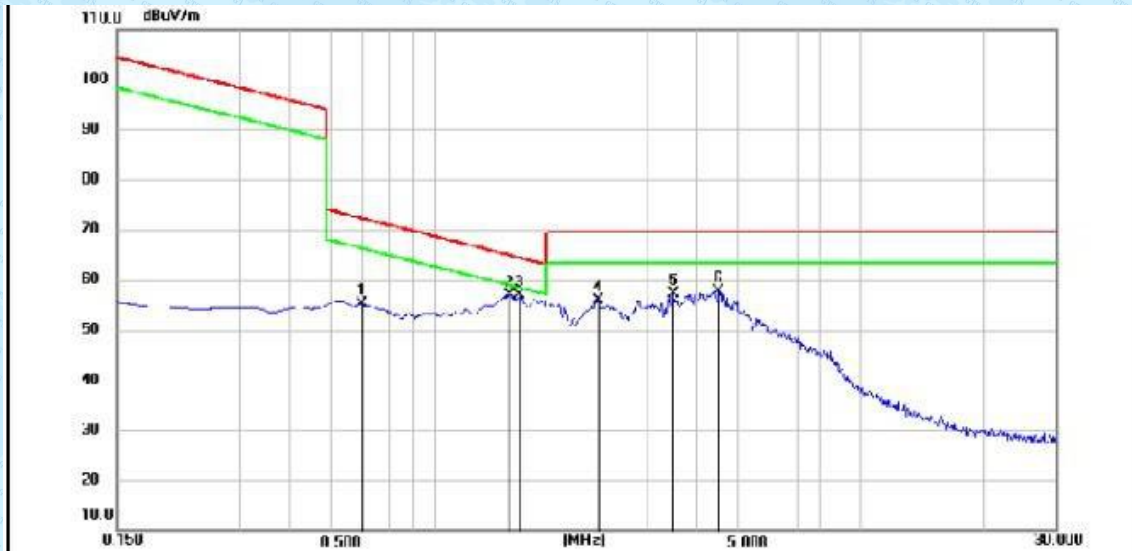

Site: aaa
Limit: FCC Part15.209 9k-30M

Polarization: **Vertical**
Power: AC 120 V/60 Hz

Temperature: 23.4(C)
Humidity: 47 %RH

Mode: Mobile Power Wireless Charging


Notc:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector				
1	0.597700	54.22	0.99	55.21	72.25	-17.04	peak				
2	1.373600	62.89	-5.90	58.99	64.91	-7.92	peak				
3	1.463300	63.19	-6.33	56.86	64.35	-7.49	peak				
4	2.269200	65.46	-9.65	55.81	69.50	-13.69	peak				
5	3.463200	70.20	-12.97	57.23	69.50	-12.27	peak				
6	4.478200	72.75	-15.08	57.69	69.50	-11.81	peak				

*:Maximum data x:Over limit !:over margin

30MHz~1GHz

Horizontal

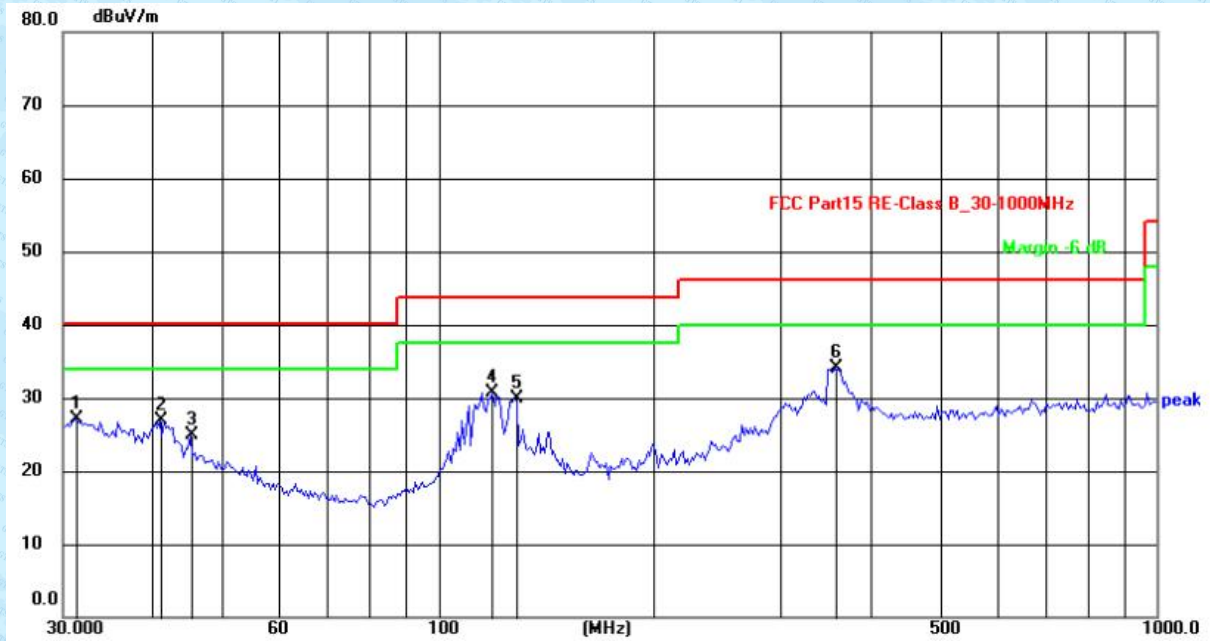


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	31.2919	27.24	-0.20	27.04	40.00	-12.96	QP
2	40.8699	29.37	-2.42	26.95	40.00	-13.05	QP
3	45.0951	29.51	-4.61	24.90	40.00	-15.10	QP
4	118.9285	37.65	-6.87	30.78	43.50	-12.72	QP
5	127.5865	36.53	-6.67	29.86	43.50	-13.64	QP
6	355.9397	38.51	-4.50	34.01	46.00	-11.99	QP

Vertical




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.0157	32.15	-1.44	30.71	40.00	-9.29	QP
2	42.3314	41.07	-3.05	38.02	40.00	-1.98	QP
3	51.8998	33.97	-7.30	26.67	40.00	-13.33	QP
4	61.4343	35.66	-9.78	25.88	40.00	-14.12	QP
5	123.1815	41.54	-6.62	34.92	43.50	-8.58	QP
6	162.0197	37.40	-8.51	28.89	43.50	-14.61	QP

7.4 20dB Occupy Bandwidth

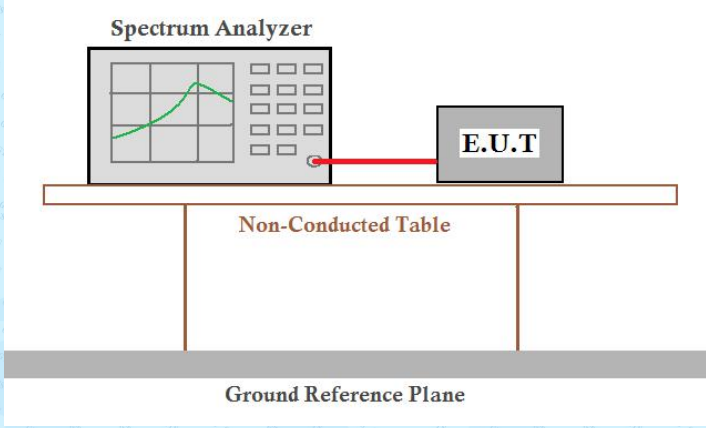Test Requirement:	FCC Part15 C Section 15.215
Test Method:	ANSI C63.10:2013
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

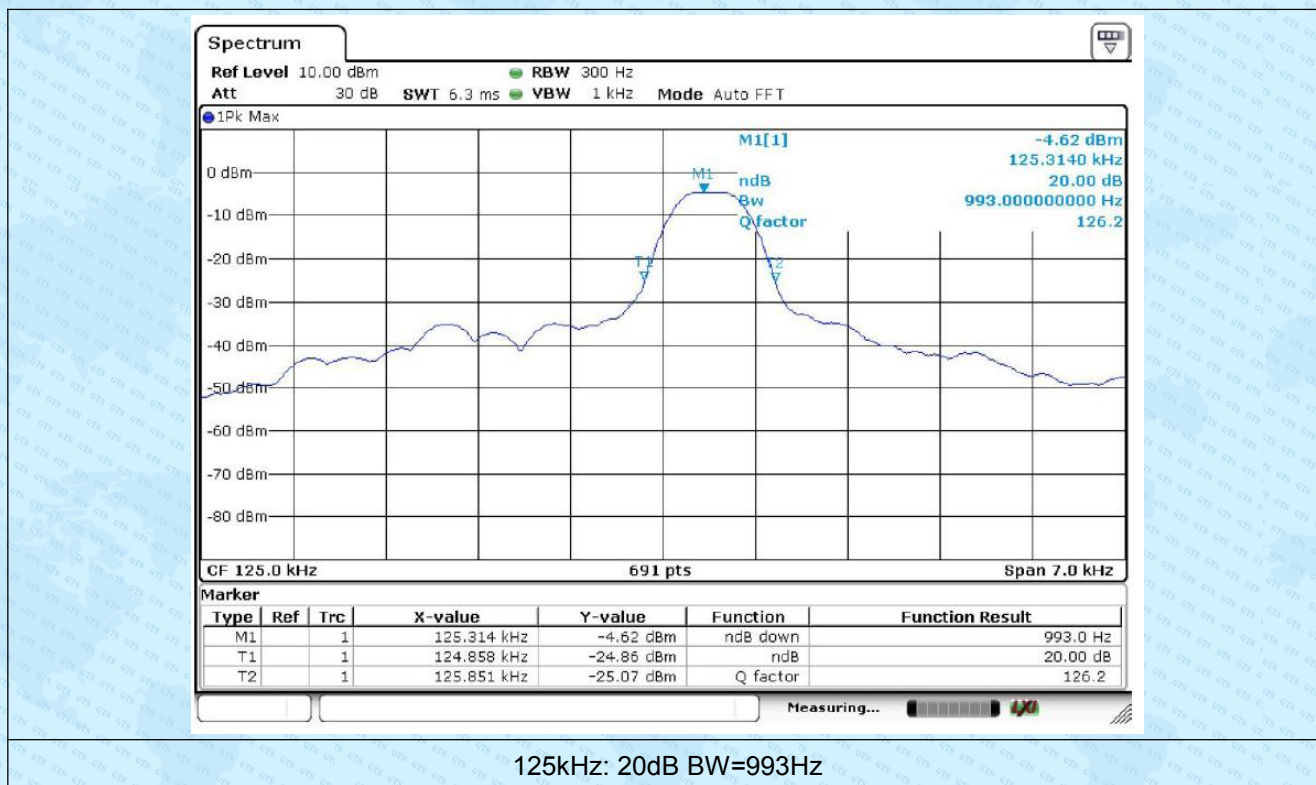

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** and **appendix III** for details.

-----End-----