



Radio Test Report

Report No.: STS2601009W08

Issued for

TRULY ELECTRONICS MFG., LTD

Truly industry city, shanwei Guangdong, P.R.C

Product Name: WIFI/BT Module+5G/6G

Brand Name: N/A

Model Name: TR7R922P2-M

Series Model(s): TR7R922P3-M

FCC ID: 2BOHY-922P2-M

Test Standards: FCC Part15.247

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT**

Applicant's Name: TRULY ELECTRONICS MFG., LTD
Address: Truly industry city, shanwei Guangdong, P.R.C
Manufacturer's Name: TRULY ELECTRONICS MFG., LTD
Address: Truly industry city, shanwei Guangdong, P.R.C

Product Description

Product Name: WIFI/BT Module+5G/6G
Brand Name: N/A
Model Name: TR7R922P2-M
Series Model(s): TR7R922P3-M
Standards: FCC Part 15.247
Test Procedure: ANSI C63.10-2020

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test

Date of receipt of test item: 05 Jan. 2026
Date (s) of performance of tests: 05 Jan. 2026 ~ 12 Feb. 2026
Date of Issue: 12 Feb. 2026
Test Result: **Pass**

Testing Engineer :

(Aaron Bu)

Technical Manager :

(Skylar Li)

Authorized Signatory :

(Bovey Yang)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	11
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	12
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
3. EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 RADIATED EMISSION MEASUREMENT	18
4. DUTY CYCLE	30
4.1 TEST STANDARD	30
4.2 TEST PROCEDURE	30
4.3 DEVIATION FROM STANDARD	30
4.4 TEST SETUP	30
4.6 TEST RESULTS	30
5. CONDUCTED SPURIOUS & BAND EDGE EMISSION	31
5.1 LIMIT	31
5.2 TEST PROCEDURE	31
5.3 DEVIATION FROM STANDARD	31
5.4 TEST SETUP	31
5.5 EUT OPERATION CONDITIONS	31
5.6 TEST RESULTS	31
6. POWER SPECTRAL DENSITY TEST	32
6.1 LIMIT	32
6.2 TEST PROCEDURE	32
6.3 DEVIATION FROM STANDARD	32
6.4 TEST SETUP	32
6.5 EUT OPERATION CONDITIONS	32
6.6 TEST RESULTS	32



Table of Contents	Page
7. BANDWIDTH TEST	33
7.1 LIMIT	33
7.2 TEST PROCEDURE	33
7.3 DEVIATION FROM STANDARD	33
7.4 TEST SETUP	33
7.5 EUT OPERATION CONDITIONS	33
7.6 TEST RESULTS	33
8. PEAK OUTPUT POWER TEST	34
7.1 LIMIT	34
8.2 TEST PROCEDURE	34
8.3 DEVIATION FROM STANDARD	34
8.4 TEST SETUP	34
8.5 EUT OPERATION CONDITIONS	34
8.6 TEST RESULTS	34
9. ANTENNA REQUIREMENT	35
9.1 STANDARD REQUIREMENT	35
9.2 EUT ANTENNA	35
APPENDIX 1-TEST DATA	36
DUTY CYCLE	36
MAXIMUM PEAK CONDUCTED OUTPUT POWER	52
-6DB BANDWIDTH	54
OCCUPIED CHANNEL BANDWIDTH	79
MAXIMUM POWER SPECTRAL DENSITY LEVEL	104
BAND EDGE	130
CONDUCTED RF SPURIOUS EMISSION	163
APPENDIX 2-PHOTOS OF TEST SETUP	212



Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	12 Feb. 2026	STS2601009W08	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247 (a)(2)	6dB Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted Band Edge Emission	PASS	--
Part 15.247(d)/ part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2020.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.751\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.888\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.48\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 2.52\text{dB}$
5	All emissions, radiated 1G-18GHz	$\pm 3.48\text{dB}$
6	All emissions, radiated >18GHz	$\pm 4.18\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.48\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.52\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.6\%$
10	Power Spectral Density, conducted	$\pm 1.214\text{dB}$
11	Duty Cycle	$\pm 3.2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	WIFI/BT Module+5G/6G	
Brand Name	N/A	
Model Name	TR7R922P2-M	
Series Model(s)	TR7R922P3-M	
Model Difference	Only different in model name	
Product Description	The EUT is a WIFI/BT Module+5G/6G	
	Operation Frequency:	802.11b/g/n/ax/be 20: 2412~2462 MHz 802.11n/ax/be40:2422~2452MHz
	Modulation Type:	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11ax(OFDM, OFDMA): BPSK,QPSK,16-QAM,64-QAM,256-QAM, 1024QAM 802.11be(OFDM, OFDMA):BPSK,QPSK, 16-QAM,64-QAM,256-QAM,1024QAM, 4096QAM
	802.11b/g Support SISO 802.11n/ax/be Support MIMO	
	Bit Rate of Transmitter:	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz): 65/58.5/52/39/26/19.5/13/6.5Mbps 802.11n(40MHz): 135/121.5/108/81/54/40.5/37/13.5Mbps 802.11ax(HE20): 135/65/58.5/52/39/26/19.5/13/6.5Mbps 802.11ax(HE40): 270/135/121.5/108/81/54/40.5/37/13.5Mbps 802.11be(HE20): 135/65/58.5/52/39/26/19.5/13/6.5Mbps 802.11be(HE40): 270/135/121.5/108/81/54/40.5/37/13.5Mbps
	Number of Channel:	802.11b/g/n/ax/be20: 11CH 802.11n/ax/be 40: 7CH
	Antenna Type:	Dipole
	Antenna Gain:	ANT 1: 2.5dBi ANT 2: 2.5dBi MIMO: 5.51dBi
Channel List	Please refer to the Note 3.	
Power Rating	Input: DC3.3V	
Adapter	N/A	
Battery	N/A	



Hardware version number	N/A
Software version number	N/A
Connecting I/O Port(s)	Please refer to the Note 1.

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna details in this report are based on the manufacturer provided antenna specification documents and apply only to the tested sample identified herein.
Any discrepancies in the antenna information may affect the accuracy of the test results, and the customer assumes responsibility for any related issues..
3. The 802.11ax mode Only support full RU.

3

Operation Frequency of channel			
802.11b/g/n/ax/be(20MHz)		Channel List for 802.11n/ax/be(40MHz)	
Channel	Frequency	Channel	Frequency
01	2412	03	2422
02	2417	04	2427
03	2422	05	2432
04	2427	06	2437
05	2432	07	2442
06	2437	08	2447
07	2442	09	2452
08	2447		
09	2452		
10	2457		
11	2462		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

2.4GHz Test Frequency:

For 802.11b/g/n/ax/be (HT20)		For 802.11n/ax/be (HT40)	
Channel	Freq.(MHz)	Channel	Freq.(MHz)
01	2412	03	2422
06	2437	06	2437
11	2462	09	2452



3. KDB 662911 D01 Multiple Transmitter Output v02r01

2) Directional Gain Calculations for In-Band Measurements

d) Unequal antenna gains, with equal transmit powers. For antenna gains given by $G_1, G_2, \dots, G_N$ dBi

☒ (i) If transmit signals are correlated, then

Directional gain = $10 \log[(10G_1/20 + 10G_2/20 + \dots + 10G_N/20)^2 / NANT]$ dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

☐ (ii) If all transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10G_1/10 + 10G_2/10 + \dots + 10G_N/10)/NANT]$ dBi

2.2 DESCRIPTION OF THE TEST MODES

Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11b CH01	1 Mbps
Mode 2	TX IEEE 802.11b CH06	1 Mbps
Mode 3	TX IEEE 802.11 b CH11	1 Mbps
Mode 4	TX IEEE 802.11g CH01	6 Mbps
Mode 5	TX IEEE 802.11g CH06	6 Mbps
Mode 6	TX IEEE 802.11g CH11	6 Mbps
Mode 7	TX IEEE 802.11n HT20 CH01	MCS 0
Mode 8	TX IEEE 802.11n HT20 CH06	MCS 0
Mode 9	TX IEEE 802.11n HT20 CH11	MCS 0
Mode 10	TX IEEE 802.11n HT40 CH03	MCS 0
Mode 11	TX IEEE 802.11n HT40 CH06	MCS 0
Mode 12	TX IEEE 802.11n HT40 CH09	MCS 0
Mode 13	TX IEEE 802.11ax HE20 CH01	NSS1 MCS0
Mode 14	TX IEEE 802.11ax HE20 CH06	NSS1 MCS0
Mode 15	TX IEEE 802.11ax HE20 CH11	NSS1 MCS0
Mode 16	TX IEEE 802.11ax HE40 CH03	NSS1 MCS0
Mode 17	TX IEEE 802.11ax HE40 CH06	NSS1 MCS0
Mode 18	TX IEEE 802.11ax HE40 CH09	NSS1 MCS0
Mode 19	TX IEEE 802.11be EHT20 CH01	NSS1 MCS0
Mode 20	TX IEEE 802.11be EHT20 CH06	NSS1 MCS0
Mode 21	TX IEEE 802.11be EHT20 CH11	NSS1 MCS0
Mode 22	TX IEEE 802.11be EHT40 CH03	NSS1 MCS0
Mode 23	TX IEEE 802.11be EHT40 CH06	NSS1 MCS0
Mode 24	TX IEEE 802.11be EHT40 CH09	NSS1 MCS0



Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) We have be tested for all available U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V /60Hz is shown in the report.

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode25: Keeping TX + WLAN Link


2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.


RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	ANT_1 Power Class	ANT_2 Power Class	Software For Testing
WIFI (2.4G)	2.4G WIFI	802.11b	ANT1:2.5 ANT2:2.5 MIMO:5.51	13	13	Bluetooth RF Test Tool V.5.2.4.29
		802.11g		16	16	
		802.11n(HT20)		15	15	
		802.11n(HT40)		15	15	
		802.11ax(HE20)		15	15	
		802.11ax(HE40)		15	15	
		802.11be(EHT20)		15	15	
		802.11be(EHT40)		15	15	

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Radiated Spurious Emission Test

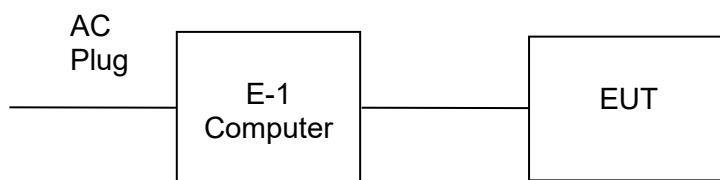

AC Conducted Emission Test

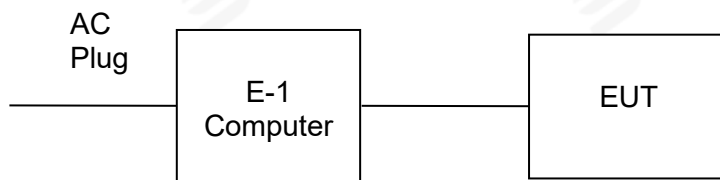

RF Conducted Test

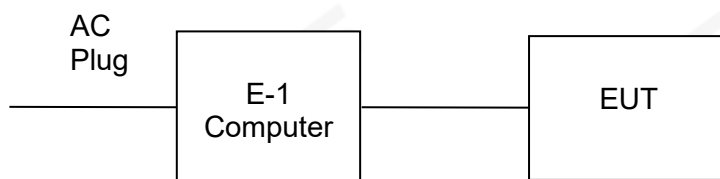



2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Note
E-1	Computer	ASUS	S7RIX8250H	N/A

Item	Equipment	Mfr/Brand	Length	Note
N/A	N/A	N/A	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2025.02.22	2026.02.21
Pre-Amplifier(1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2025.09.25	2026.09.24
Pre-Amplifier(18G-40GHz)	SKET	LNPA_1840-50	SK2018101801	2025.02.22	2026.02.21
Active loop Antenna	ZHINAN	ZN30900C	16035	2025.02.25	2027.02.24
Bilog Antenna	TESEQ	CBL6111D	34678	2025.09.27	2027.09.26
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2025.09.27	2027.09.26
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2025.09.27	2027.09.26
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2025.09.26	2026.09.25
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Band 2.4G-2.5G Filter	HX MICROWAVE	HXLBQ-DZA61	N/A	2025.09.23	2026.09.22
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHENGFENG	DPS-305AF	17064939	2025.09.22	2026.09.21
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
Conduction Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2025.09.25	2026.09.24
Limiter	CYBERTEK	EM5010	N/A	2025.09.25	2026.09.24
LISN	R&S	ENV216	101242	2025.09.25	2026.09.24
LISN	EMCO	3810/2NM	23625	2025.09.25	2026.09.24
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
Test SW	EZ-EMC	Ver.STSLAB-03A1 CE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Agilent	N9020A	MY51510623	2025.02.22	2026.02.21
Pulse Power Sensor	Anritsu	MA2411B	917389	2025.09.23	2026.09.22
Power Meter	Anritsu	ML2480	1005127	2025.09.23	2026.09.22
Switch control box	MW	MW100-RFCB	N/A	N/A	N/A
Temperature& Humidity test chamber	Safety test	AG80L	171200018	2025.02.22	2026.02.21
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
Test SW	MW	MTS 8310_2.0.0.0			



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

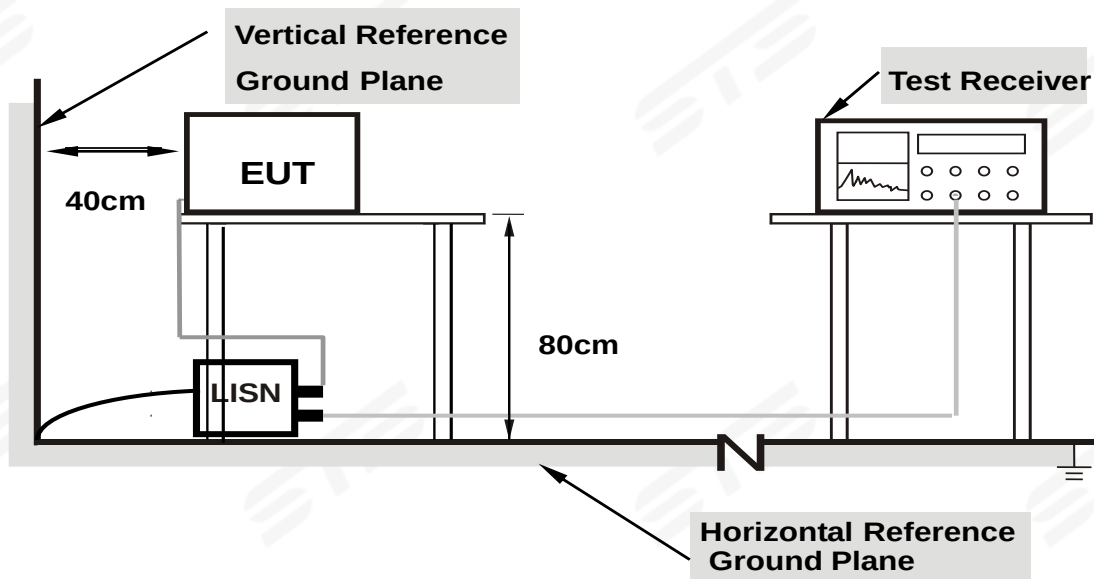

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.1.5 TEST RESULT

Temperature:	25.1°C	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 25		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1620	38.92	19.37	58.29	65.36	-7.07	QP
2	0.1620	26.46	19.37	45.83	55.36	-9.53	AVG
3	0.2340	29.10	19.39	48.49	62.31	-13.82	QP
4	0.2340	11.38	19.39	30.77	52.31	-21.54	AVG
5	3.6940	26.10	19.41	45.51	56.00	-10.49	QP
6	3.6940	12.69	19.41	32.10	46.00	-13.90	AVG
7	4.5420	25.23	19.41	44.64	56.00	-11.36	QP
8	4.5420	13.96	19.41	33.37	46.00	-12.63	AVG
9	5.3420	24.50	19.42	43.92	60.00	-16.08	QP
10	5.3420	14.23	19.42	33.65	50.00	-16.35	AVG
11	6.6020	25.87	19.45	45.32	60.00	-14.68	QP
12	6.6020	14.31	19.45	33.76	50.00	-16.24	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

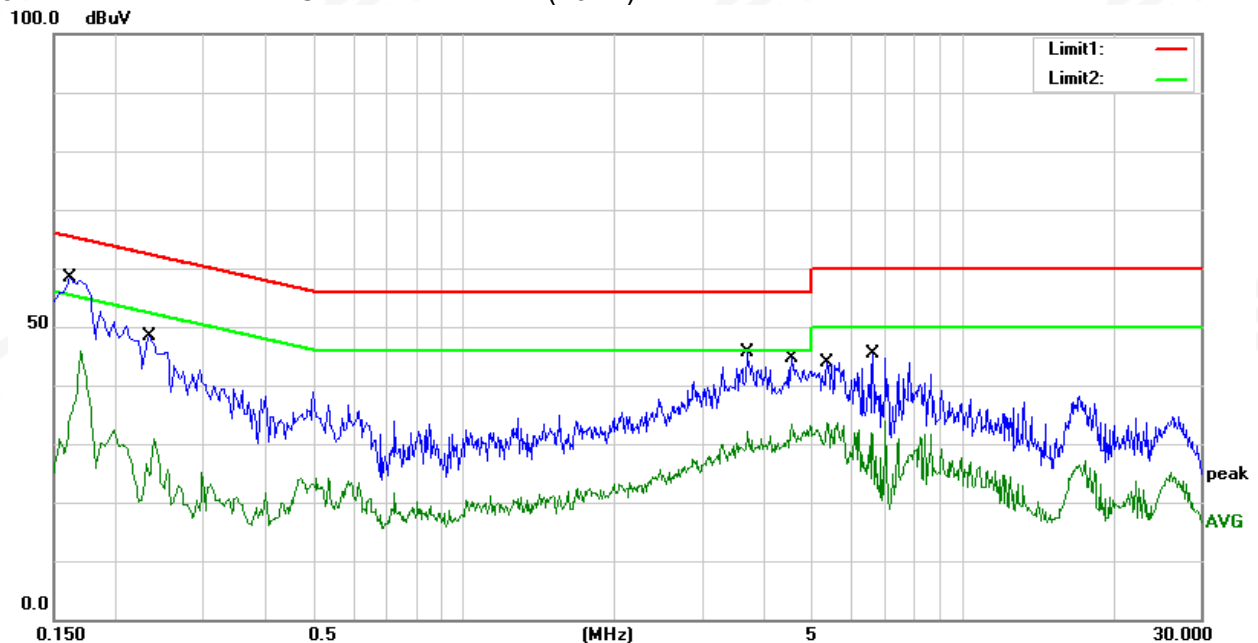




Temperature:	25.1℃	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 25		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	39.18	19.38	58.56	66.00	-7.44	QP
2	0.1500	22.40	19.38	41.78	56.00	-14.22	AVG
3	0.2140	32.04	19.39	51.43	63.05	-11.62	QP
4	0.2140	11.99	19.39	31.38	53.05	-21.67	AVG
5	3.9380	24.94	19.41	44.35	56.00	-11.65	QP
6	3.9380	12.45	19.41	31.86	46.00	-14.14	AVG
7	5.6100	25.31	19.42	44.73	60.00	-15.27	QP
8	5.6100	14.92	19.42	34.34	50.00	-15.66	AVG
9	6.8340	26.10	19.45	45.55	60.00	-14.45	QP
10	6.8340	14.29	19.45	33.74	50.00	-16.26	AVG
11	10.3900	23.55	19.65	43.20	60.00	-16.80	QP
12	10.3900	13.17	19.65	32.82	50.00	-17.18	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) - Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

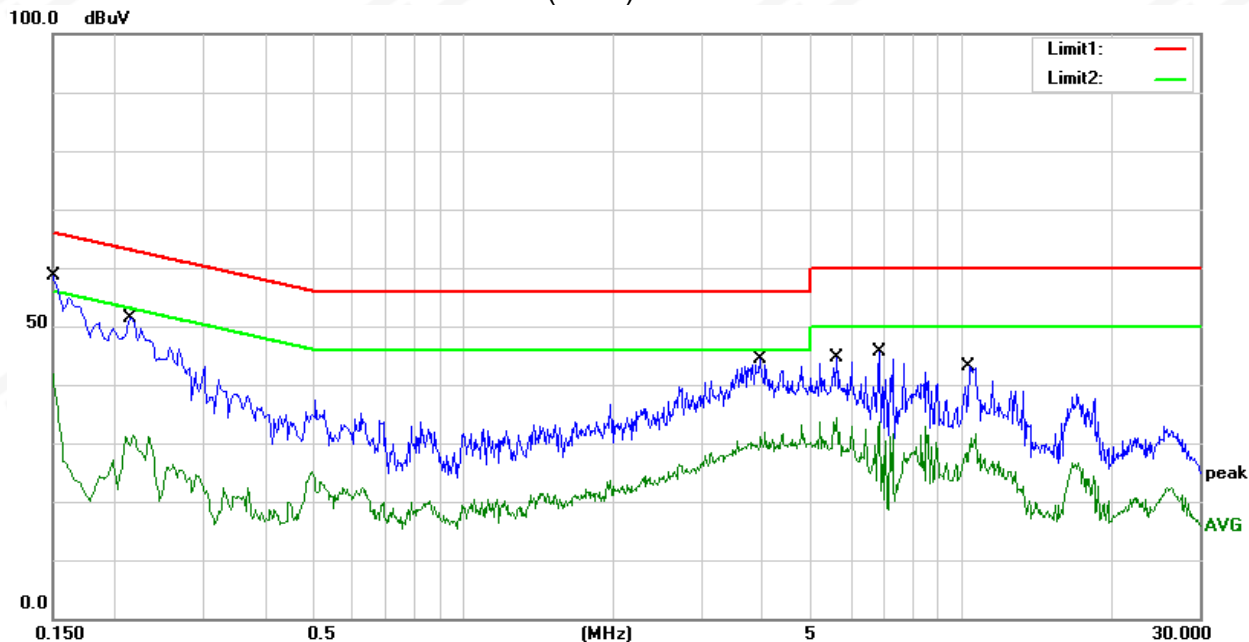



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2020 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2310 to 2430 MHz Upper Band Edge: 2445 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)



Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested with a band-stop filter and performed pretest to three orthogonal axis. The worst-case emissions were reported.

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

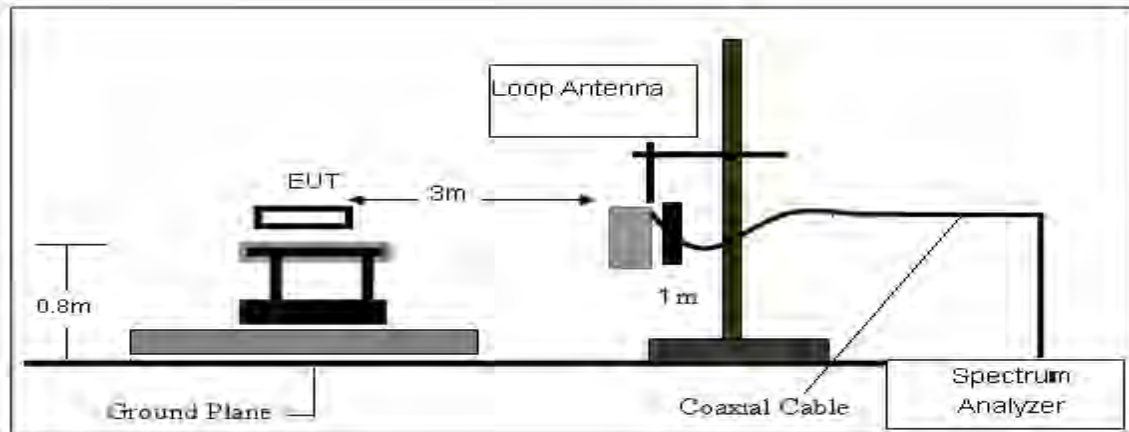

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

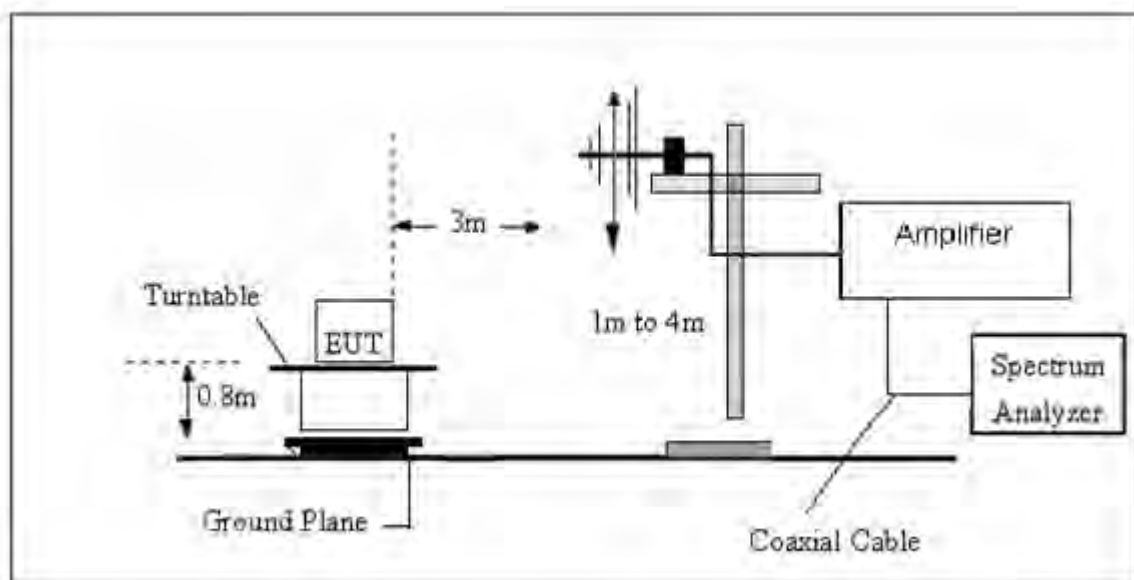

(C) Radiated Emission Test-Up Frequency Above 1GHz

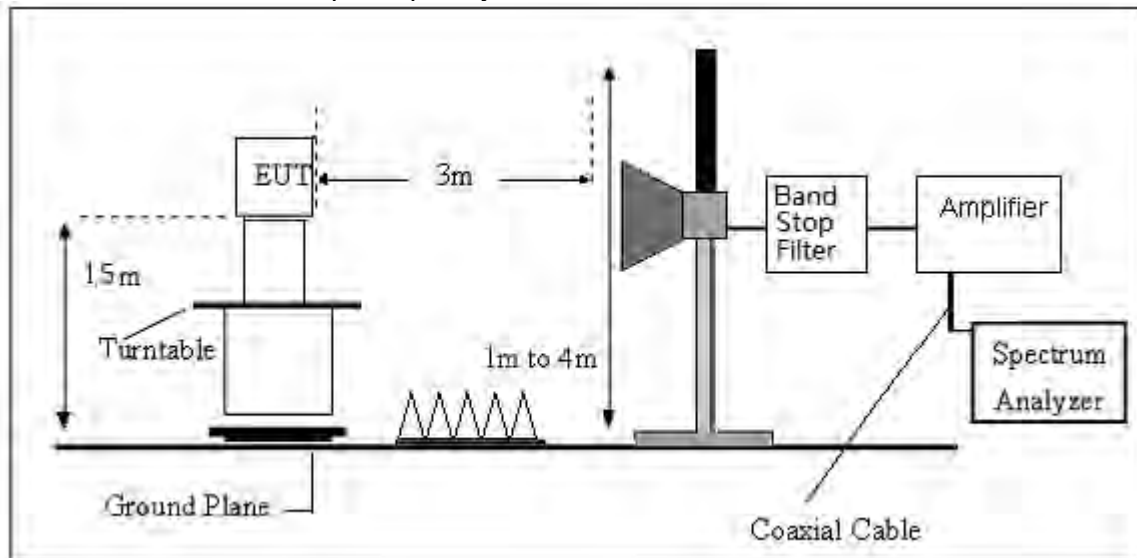

3.2.4 EUT OPERATING CONDITIONS

Please refer to section 3.1.4 of this report.



3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$



3.2.6 TEST RESULT

9KHz-30MHz

Temperature:	23.4°C	Relative Humidity:	60%
Test Voltage:	DC 3.3V	Polarization:	--
Test Mode:	TX Mode		

Freq.	Reading	Limit	Margin	State	Test Result
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F	
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.




(30MHz - 1000MHz)

Temperature:	23.4℃	Relative Humidity:	60%
Test Voltage:	DC 3.3V	Phase:	Horizontal
Test Mode:	802.11n20 (worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	28.33	-13.35	14.98	40.00	-25.02	peak
2	81.4100	38.82	-22.82	16.00	40.00	-24.00	peak
3	223.0300	50.78	-19.42	31.36	46.00	-14.64	peak
4	341.3700	48.54	-13.36	35.18	46.00	-10.82	peak
5	666.3200	40.48	-4.66	35.82	46.00	-10.18	peak
6	869.0500	39.22	-0.52	38.70	46.00	-7.30	peak

Remark:

1. Margin = Result (Result = Reading + Factor) - Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain
3. All modes have been tested, only show the worst case.

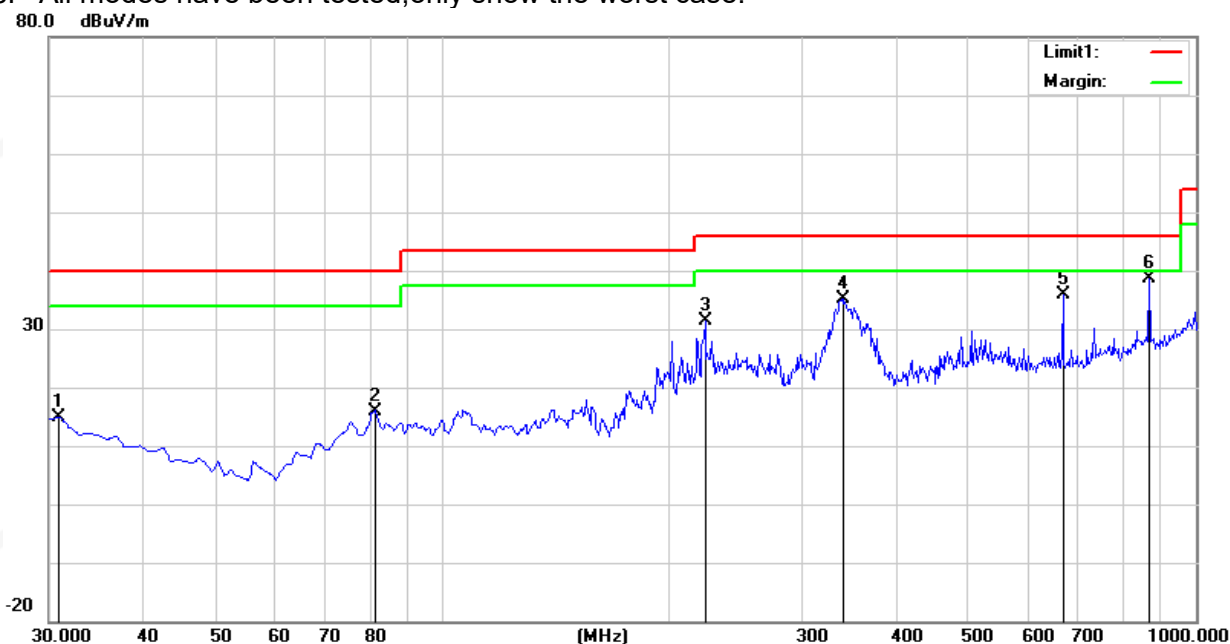




Temperature:	23.4℃	Relative Humidity:	60%
Test Voltage:	DC 3.3V	Phase:	Vertical
Test Mode:	802.11n20 (worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	40.6700	37.97	-18.40	19.57	40.00	-20.43	peak
2	224.0000	44.66	-19.38	25.28	46.00	-20.72	peak
3	340.4000	53.03	-13.39	39.64	46.00	-6.36	peak
4	516.9400	38.65	-7.85	30.80	46.00	-15.20	peak
5	664.3800	36.25	-4.71	31.54	46.00	-14.46	peak
6	869.0500	39.80	-0.52	39.28	46.00	-6.72	peak

Remark:.

1. Margin = Result (Result = Reading + Factor) – Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain
3. All modes have been tested, only show the worst case.

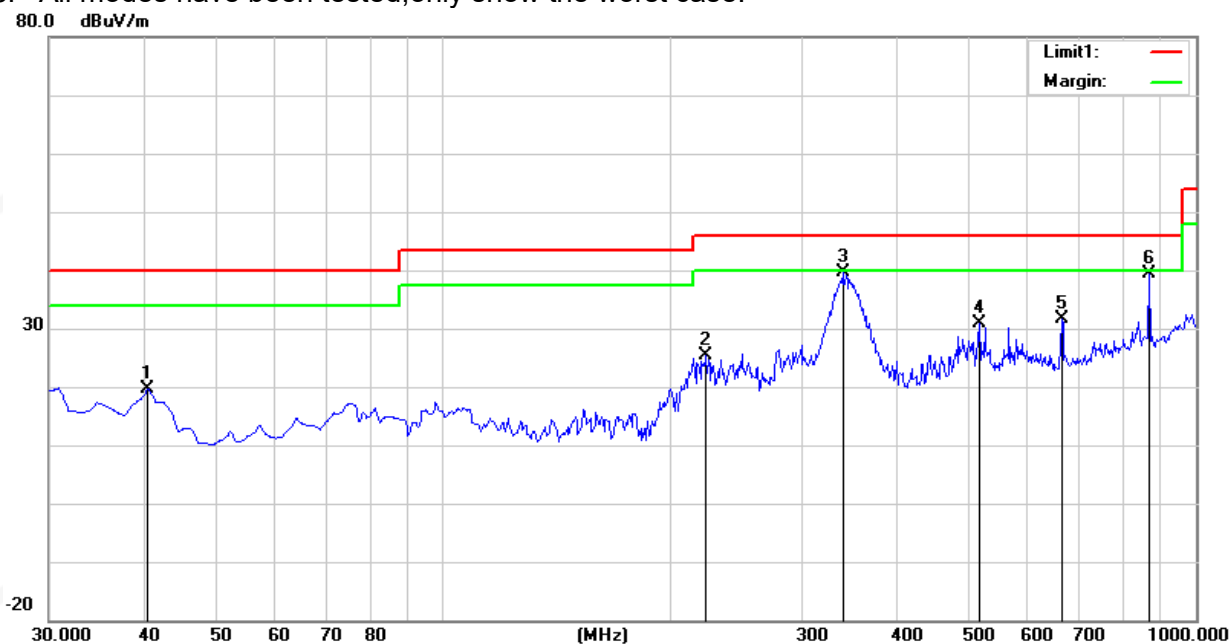



(1000MHz-25GHz) Spurious emission Requirements

Frequency	Meter Reading	Amplifier	Loss	Antenna Factor	Corrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (802.11n20 MIMO)										
3264.66	61.29	44.70	6.70	28.20	-9.80	51.49	74.00	-22.51	PK	Vertical
3264.66	51.01	44.70	6.70	28.20	-9.80	41.21	54.00	-12.79	AV	Vertical
3264.84	61.34	44.70	6.70	28.20	-9.80	51.54	74.00	-22.46	PK	Horizontal
3264.84	50.50	44.70	6.70	28.20	-9.80	40.70	54.00	-13.30	AV	Horizontal
4824.39	58.97	44.20	9.04	31.60	-3.56	55.41	74.00	-18.59	PK	Vertical
4824.39	50.07	44.20	9.04	31.60	-3.56	46.51	54.00	-7.49	AV	Vertical
4824.36	58.79	44.20	9.04	31.60	-3.56	55.23	74.00	-18.77	PK	Horizontal
4824.36	50.20	44.20	9.04	31.60	-3.56	46.64	54.00	-7.36	AV	Horizontal
5359.84	48.15	44.20	9.86	32.00	-2.34	45.81	74.00	-28.19	PK	Vertical
5359.84	38.99	44.20	9.86	32.00	-2.34	36.65	54.00	-17.35	AV	Vertical
5359.71	47.84	44.20	9.86	32.00	-2.34	45.49	74.00	-28.51	PK	Horizontal
5359.71	38.87	44.20	9.86	32.00	-2.34	36.53	54.00	-17.47	AV	Horizontal
7235.87	54.46	43.50	11.40	35.50	3.40	57.86	74.00	-16.14	PK	Vertical
7235.87	43.54	43.50	11.40	35.50	3.40	46.94	54.00	-7.06	AV	Vertical
7235.79	54.45	43.50	11.40	35.50	3.40	57.85	74.00	-16.15	PK	Horizontal
7235.79	44.69	43.50	11.40	35.50	3.40	48.09	54.00	-5.91	AV	Horizontal
Middle Channel										
3264.87	61.27	44.70	6.70	28.20	-9.80	51.47	74.00	-22.53	PK	Vertical
3264.87	51.60	44.70	6.70	28.20	-9.80	41.80	54.00	-12.20	AV	Vertical
3264.77	62.27	44.70	6.70	28.20	-9.80	52.47	74.00	-21.53	PK	Horizontal
3264.77	50.81	44.70	6.70	28.20	-9.80	41.01	54.00	-12.99	AV	Horizontal
4874.45	58.87	44.20	9.04	31.60	-3.56	55.31	74.00	-18.69	PK	Vertical
4874.45	49.32	44.20	9.04	31.60	-3.56	45.76	54.00	-8.24	AV	Vertical
4874.33	58.26	44.20	9.04	31.60	-3.56	54.70	74.00	-19.30	PK	Horizontal
4874.33	50.39	44.20	9.04	31.60	-3.56	46.83	54.00	-7.17	AV	Horizontal
5359.67	48.84	44.20	9.86	32.00	-2.34	46.50	74.00	-27.50	PK	Vertical
5359.67	39.92	44.20	9.86	32.00	-2.34	37.58	54.00	-16.42	AV	Vertical
5359.65	48.39	44.20	9.86	32.00	-2.34	46.05	74.00	-27.95	PK	Horizontal
5359.65	38.11	44.20	9.86	32.00	-2.34	35.77	54.00	-18.23	AV	Horizontal
7310.79	53.98	43.50	11.40	35.50	3.40	57.38	74.00	-16.62	PK	Vertical
7310.79	43.54	43.50	11.40	35.50	3.40	46.94	54.00	-7.06	AV	Vertical
7310.73	54.08	43.50	11.40	35.50	3.40	57.48	74.00	-16.52	PK	Horizontal
7310.73	44.75	43.50	11.40	35.50	3.40	48.15	54.00	-5.85	AV	Horizontal

High Channel										
3264.76	61.41	44.70	6.70	28.20	-9.80	51.61	74.00	-22.39	PK	Vertical
3264.76	50.17	44.70	6.70	28.20	-9.80	40.37	54.00	-13.63	AV	Vertical
3264.82	61.28	44.70	6.70	28.20	-9.80	51.48	74.00	-22.52	PK	Horizontal
3264.82	50.71	44.70	6.70	28.20	-9.80	40.91	54.00	-13.09	AV	Horizontal
4924.56	58.31	44.20	9.04	31.60	-3.56	54.75	74.00	-19.25	PK	Vertical
4924.56	49.66	44.20	9.04	31.60	-3.56	46.10	54.00	-7.90	AV	Vertical
4924.50	59.38	44.20	9.04	31.60	-3.56	55.82	74.00	-18.18	PK	Horizontal
4924.50	50.07	44.20	9.04	31.60	-3.56	46.51	54.00	-7.49	AV	Horizontal
5359.89	48.90	44.20	9.86	32.00	-2.34	46.56	74.00	-27.44	PK	Vertical
5359.89	40.22	44.20	9.86	32.00	-2.34	37.88	54.00	-16.12	AV	Vertical
5359.58	47.45	44.20	9.86	32.00	-2.34	45.10	74.00	-28.90	PK	Horizontal
5359.58	38.20	44.20	9.86	32.00	-2.34	35.85	54.00	-18.15	AV	Horizontal
7385.96	53.88	43.50	11.40	35.50	3.40	57.28	74.00	-16.72	PK	Vertical
7385.96	44.54	43.50	11.40	35.50	3.40	47.94	54.00	-6.06	AV	Vertical
7385.90	54.87	43.50	11.40	35.50	3.40	58.27	74.00	-15.73	PK	Horizontal
7385.90	44.19	43.50	11.40	35.50	3.40	47.59	54.00	-6.41	AV	Horizontal

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- All modes have been measured, only worst mode was reported.
Emission Level = Reading + Factor
Margin = Emission Level-Limit
- The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.




3.2.6 TEST RESULTS(Band edge Requirements)

802.11 n20 MIMO


Low

Horizontal

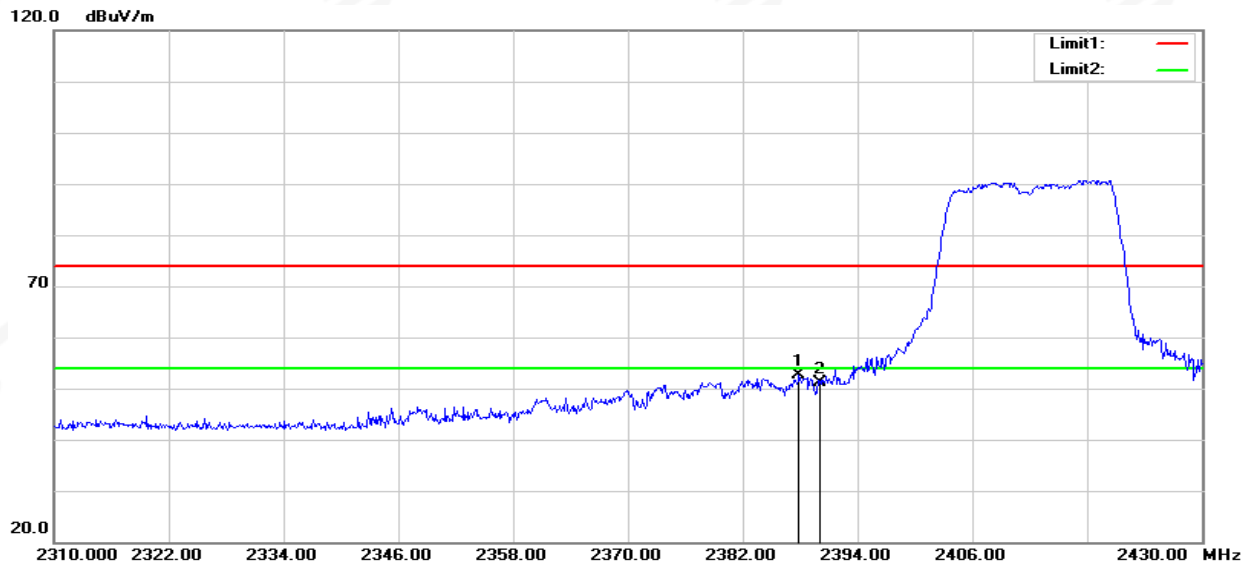

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.880	48.33	4.31	52.64	54.00	-1.36	peak
2	2390.000	46.72	4.34	51.06	54.00	-2.94	peak


Vertical

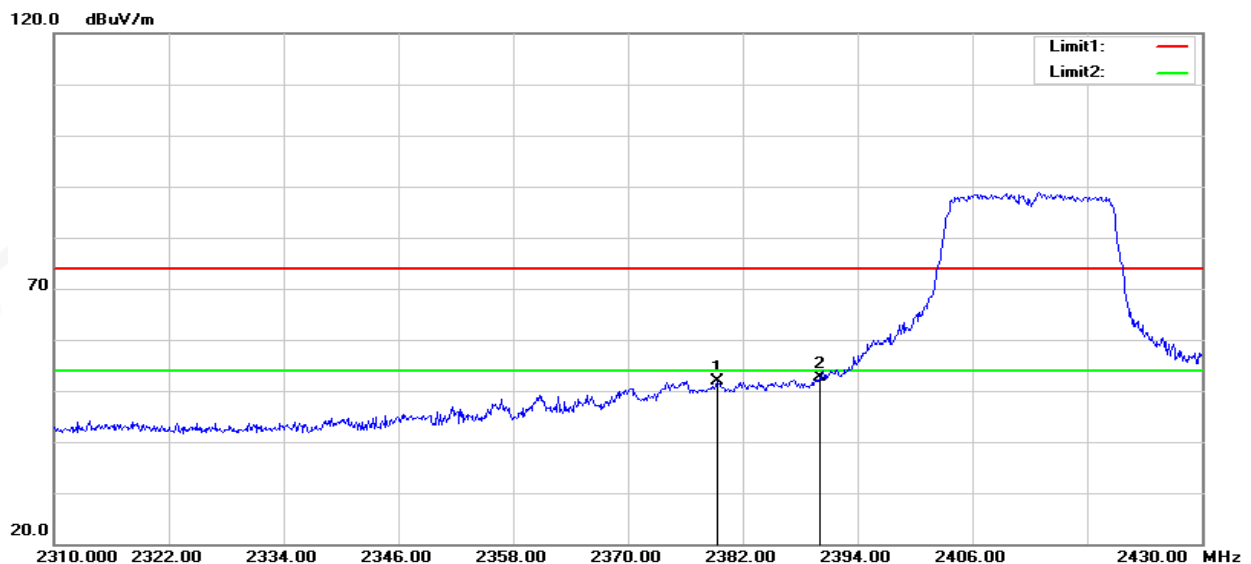

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2379.360	47.75	4.18	51.93	54.00	-2.07	peak
2	2390.000	48.32	4.34	52.66	54.00	-1.34	peak




High
Horizontal

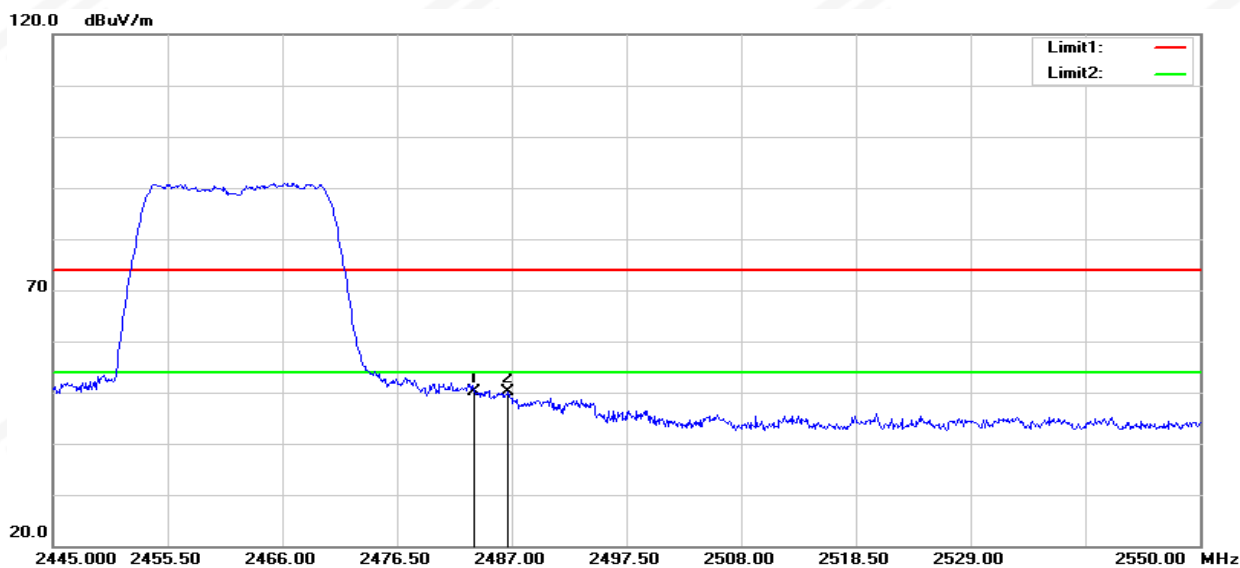

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	45.41	4.60	50.01	54.00	-3.99	peak
2	2486.685	45.51	4.61	50.12	54.00	-3.88	peak

Vertical

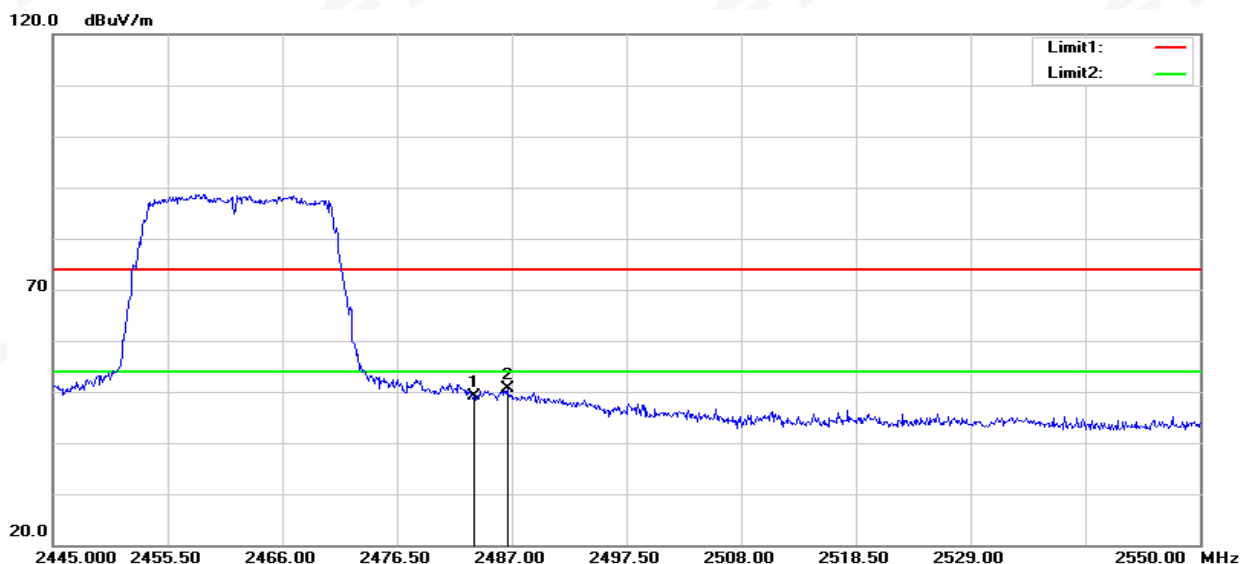

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	44.55	4.60	49.15	54.00	-4.85	peak
2	2486.580	45.99	4.61	50.60	54.00	-3.40	peak

Note: All modes have been measured, only worst mode was reported.

4. DUTY CYCLE

4.1 TEST STANDARD

Please refer to ANSI C63.10-2020 Section 11.6

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Zero
RB	set RBW to the largest available value
VB	$VBW \geq RBW$.
Detector	Peak
Trace	Clear Write
Sweep Time	Auto

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



5. CONDUCTED SPURIOUS & BAND EDGE EMISSION

5.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

5.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

5.6 TEST RESULTS

Note:

1. The test data please refer to APPENDIX 1.
2. For unwanted emission strength measurements of 802.11n, 802.11ax MIMO, 3dB is added to SISO measurements, and the results are passed.



6. POWER SPECTRAL DENSITY TEST

6.1 LIMIT

FCC Part15.247 , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	≤ 8 dBm (RBW ≥ 3 KHz)	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$.
4. Set the $\text{VBW} \geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

6.6 TEST RESULTS

Note: The test data please refer to APPENDIX 1.

7. BANDWIDTH TEST

7.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 1% to 5% of the OBW but not less than 100 kHz., VBW $\geq$ 3RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

7.6 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



8. PEAK OUTPUT POWER TEST

7.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE


PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

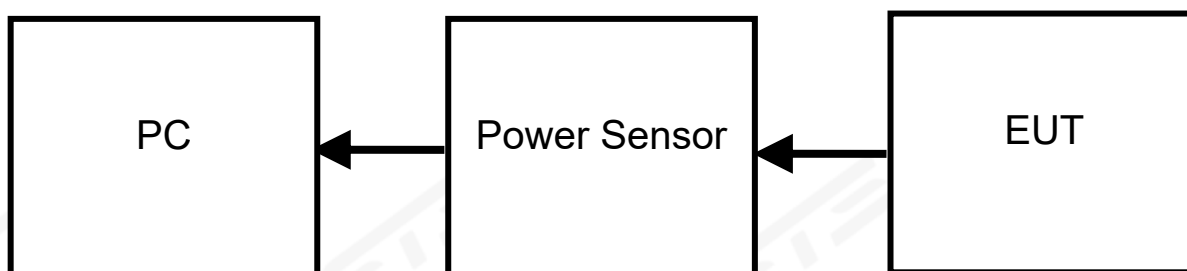

8.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

8.6 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is Dipole Antenna. It comply with the standard requirement.



APPENDIX 1-TEST DATA


Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	8.352	8.44	98.96	0.05	0.12
NVNT	b	2437	Ant1	8.352	8.44	98.96	0.05	0.12
NVNT	b	2462	Ant1	8.352	8.44	98.96	0.05	0.12
NVNT	b	2412	Ant2	8.352	8.44	98.96	0.05	0.12
NVNT	b	2437	Ant2	8.352	8.44	98.96	0.05	0.12
NVNT	b	2462	Ant2	8.352	8.44	98.96	0.05	0.12
NVNT	g	2412	Ant1	2.088	2.176	95.96	0.18	0.48
NVNT	g	2437	Ant1	2.088	2.176	95.96	0.18	0.48
NVNT	g	2462	Ant1	2.088	2.176	95.96	0.18	0.48
NVNT	g	2412	Ant2	2.088	2.176	95.96	0.18	0.48
NVNT	g	2437	Ant2	2.088	2.176	95.96	0.18	0.48
NVNT	g	2462	Ant2	2.088	2.176	95.96	0.18	0.48
NVNT	n20	2412	MIMO	12.03	12.28	97.96	0.09	0.08
NVNT	n20	2437	MIMO	12.03	12.29	97.88	0.09	0.08
NVNT	n20	2462	MIMO	12.03	12.29	97.88	0.09	0.08
NVNT	n40	2422	MIMO	12.02	12.28	97.88	0.09	0.08
NVNT	n40	2437	MIMO	12	12.26	97.88	0.09	0.08
NVNT	n40	2452	MIMO	12.02	12.28	97.88	0.09	0.08
NVNT	ax20	2412	MIMO	6.01	6.27	95.85	0.18	0.17
NVNT	ax20	2437	MIMO	6.02	6.28	95.86	0.18	0.17
NVNT	ax20	2462	MIMO	6.01	6.27	95.85	0.18	0.17
NVNT	ax40	2422	MIMO	11.96	12.22	97.87	0.09	0.08
NVNT	ax40	2437	MIMO	11.96	12.22	97.87	0.09	0.08
NVNT	ax40	2452	MIMO	11.96	12.22	97.87	0.09	0.08
NVNT	be20	2412	MIMO	6.02	6.28	95.86	0.18	0.17
NVNT	be20	2437	MIMO	6.02	6.28	95.86	0.18	0.17
NVNT	be20	2462	MIMO	6.02	6.28	95.86	0.18	0.17
NVNT	be40	2422	MIMO	11.96	12.22	97.87	0.09	0.08
NVNT	be40	2437	MIMO	11.96	12.22	97.87	0.09	0.08
NVNT	be40	2452	MIMO	11.96	12.22	97.87	0.09	0.08




Test Graphs

Duty Cycle NVNT b 2412MHz Ant1

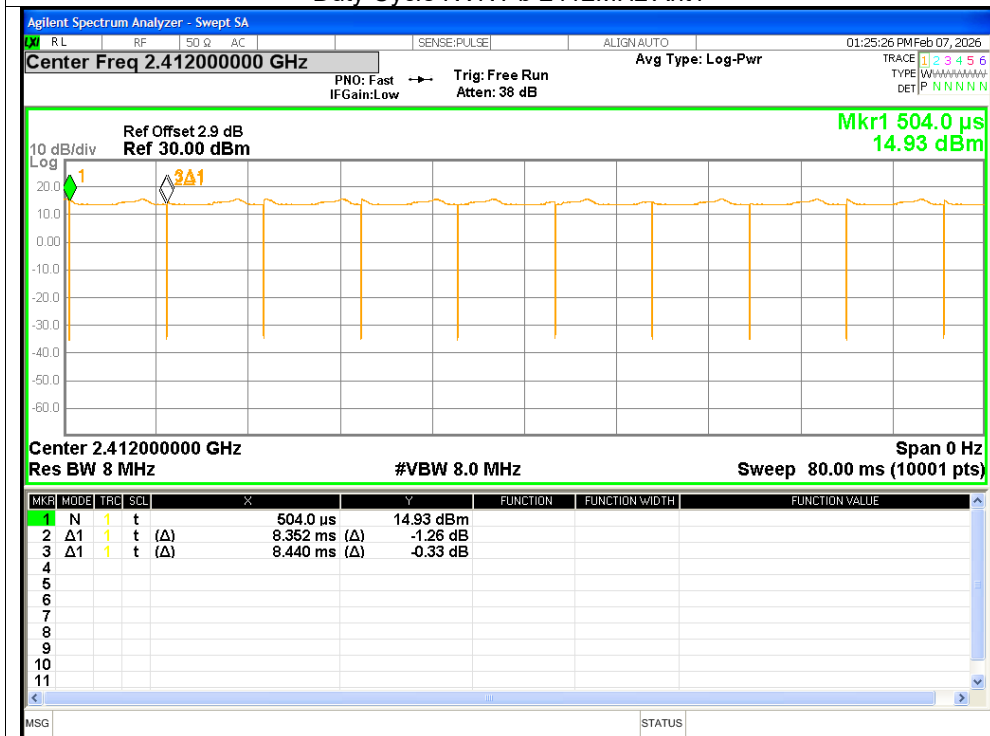


Duty Cycle NVNT b 2437MHz Ant1

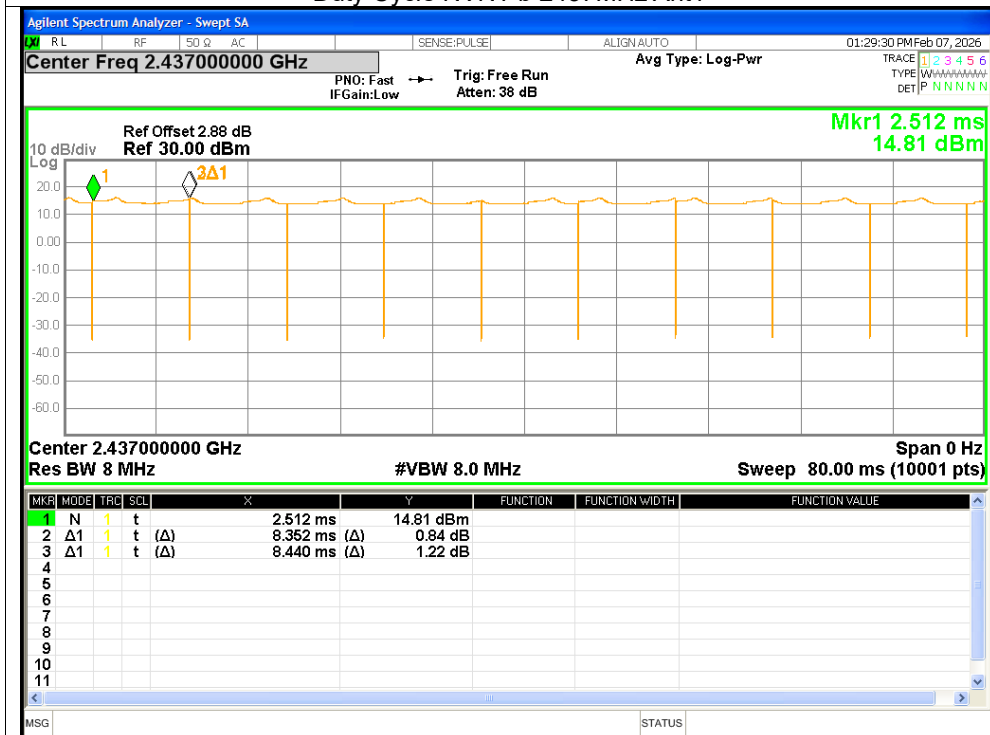




Duty Cycle NVNT b 2462MHz Ant1

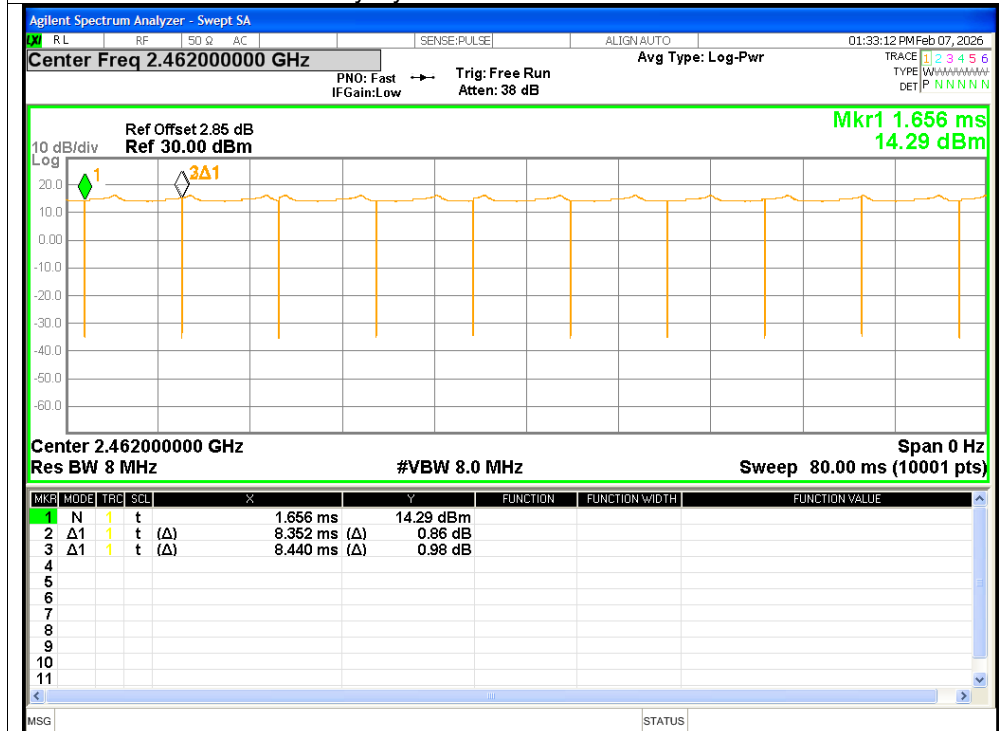


Duty Cycle NVNT b 2412MHz Ant2

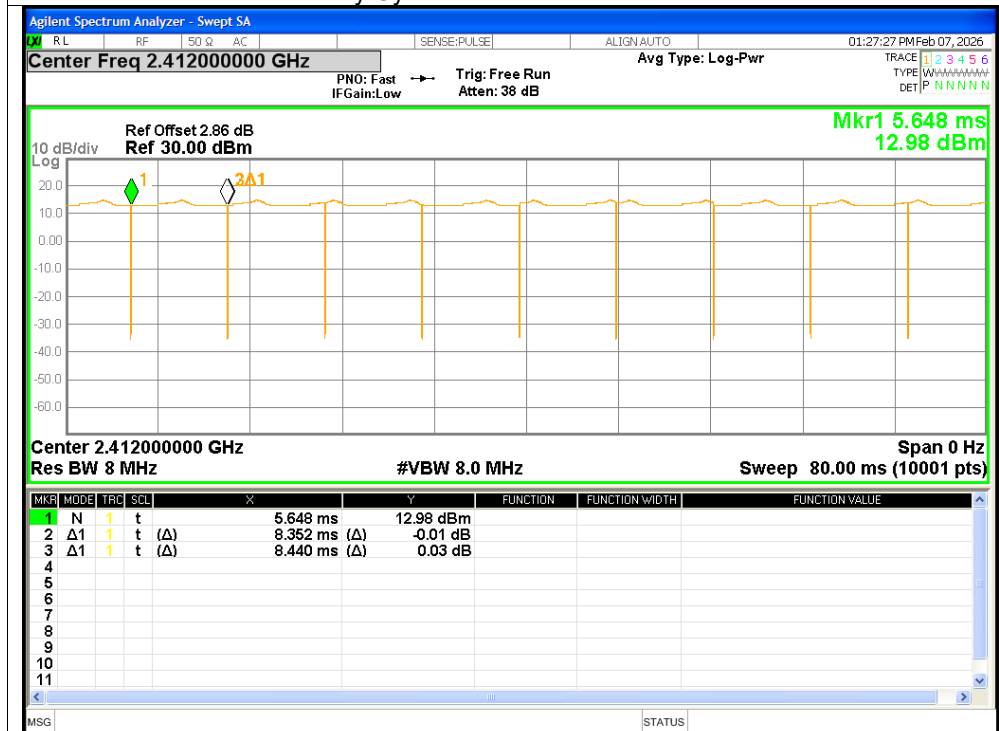




Duty Cycle NVNT b 2437MHz Ant2

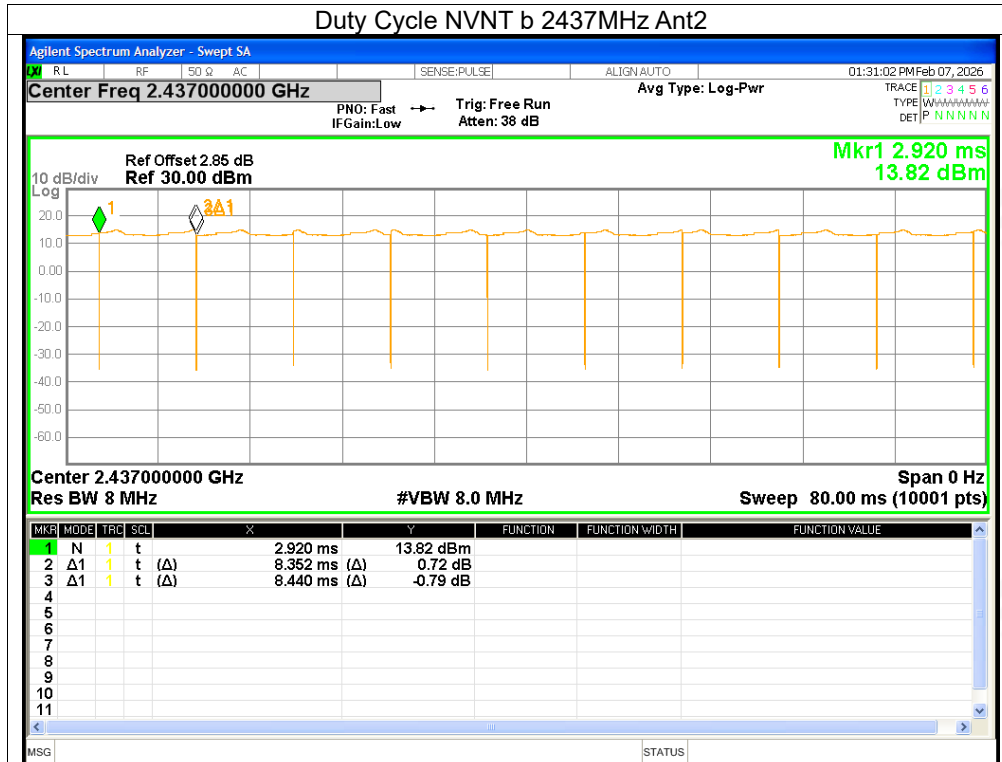


Duty Cycle NVNT b 2462MHz Ant2

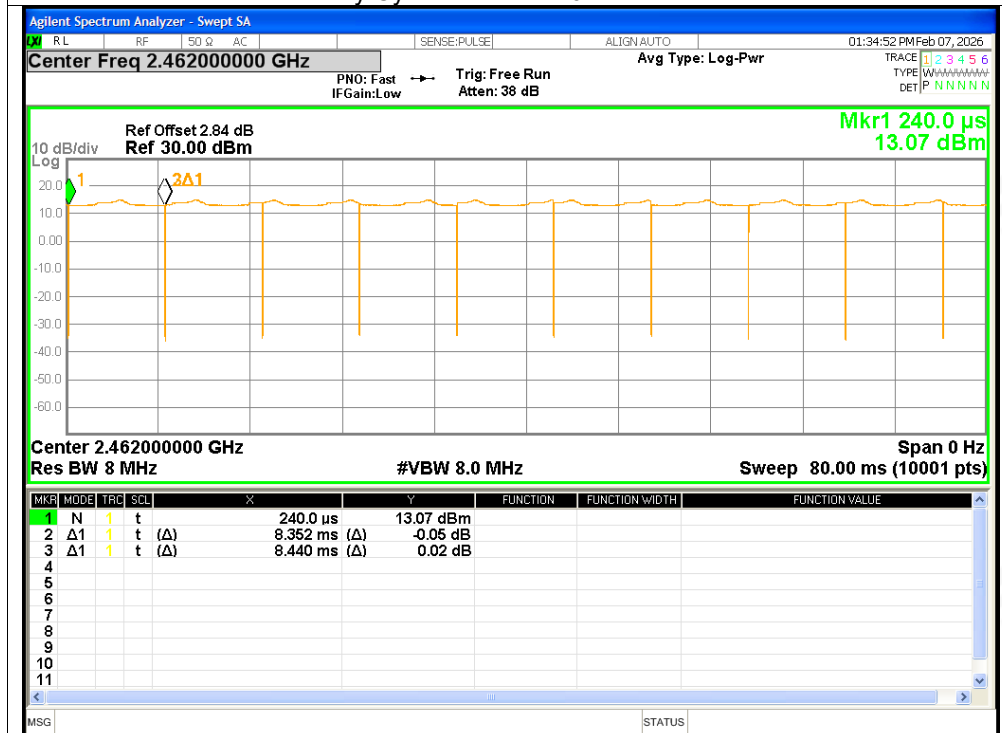




Duty Cycle NVNT g 2412MHz Ant1

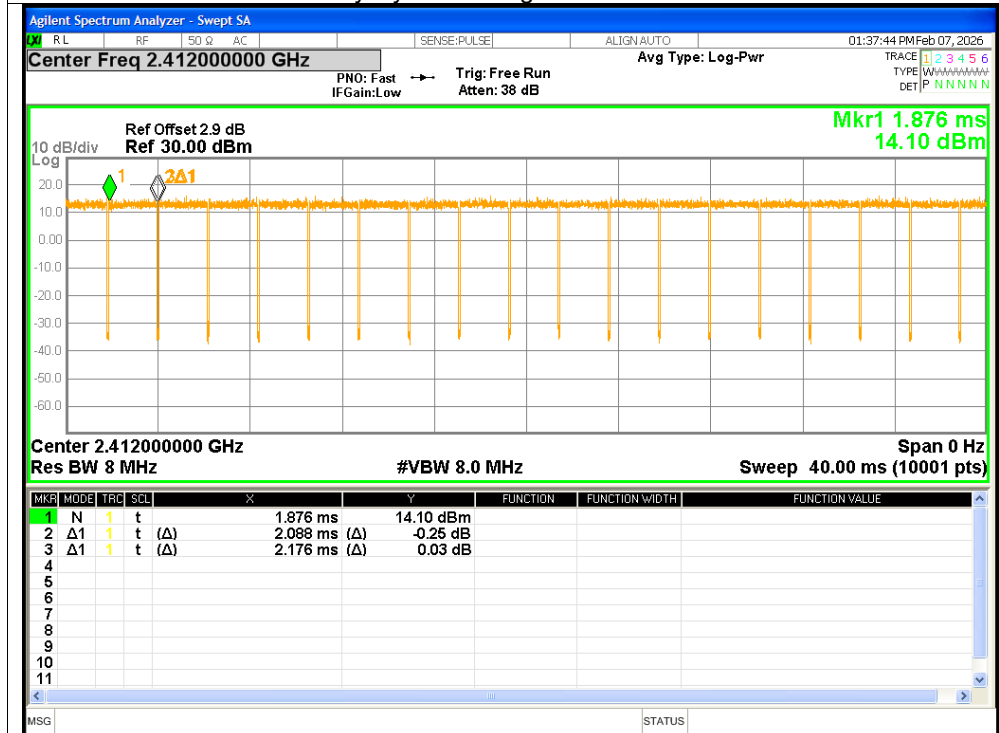


Duty Cycle NVNT g 2437MHz Ant1

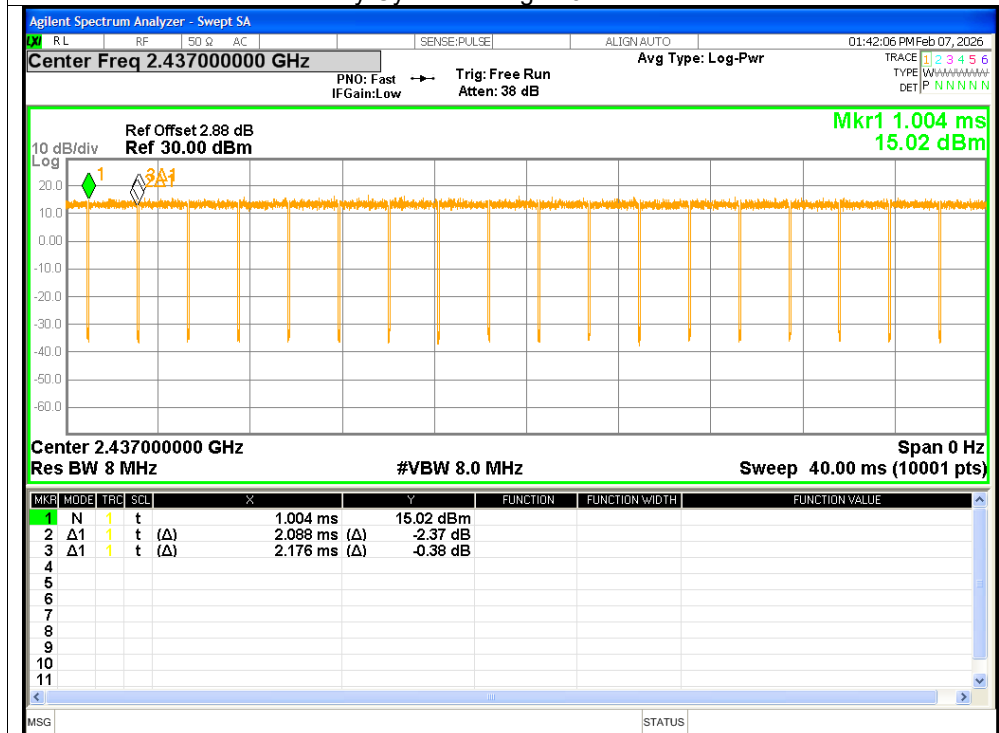




Duty Cycle NVNT g 2462MHz Ant1

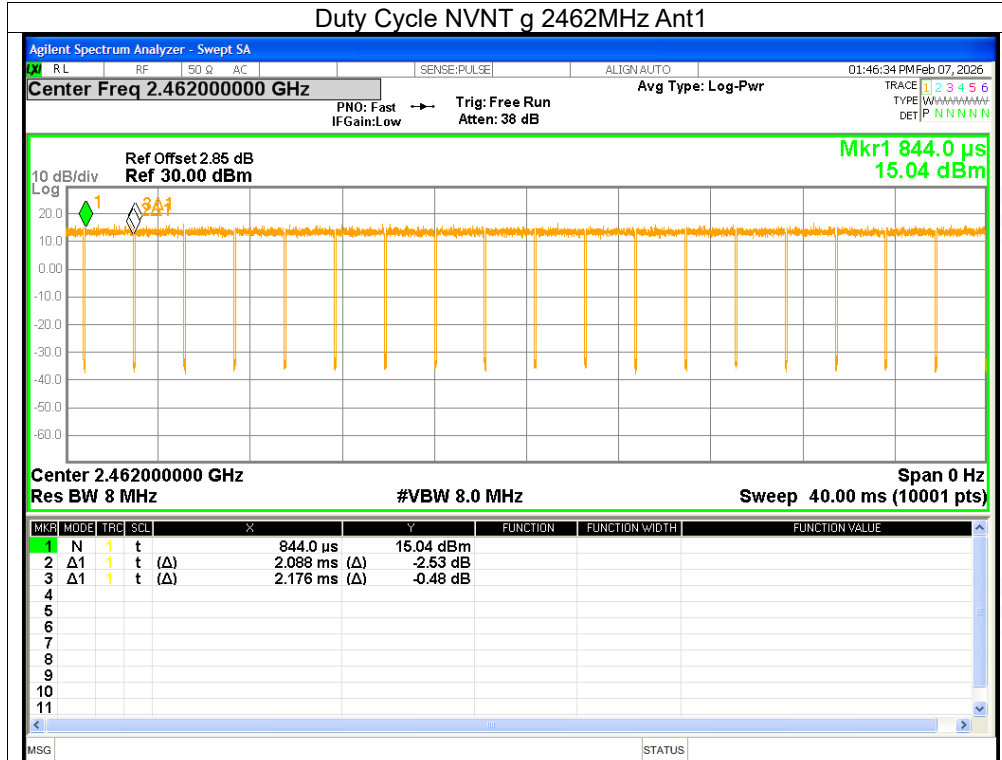


Duty Cycle NVNT g 2412MHz Ant2

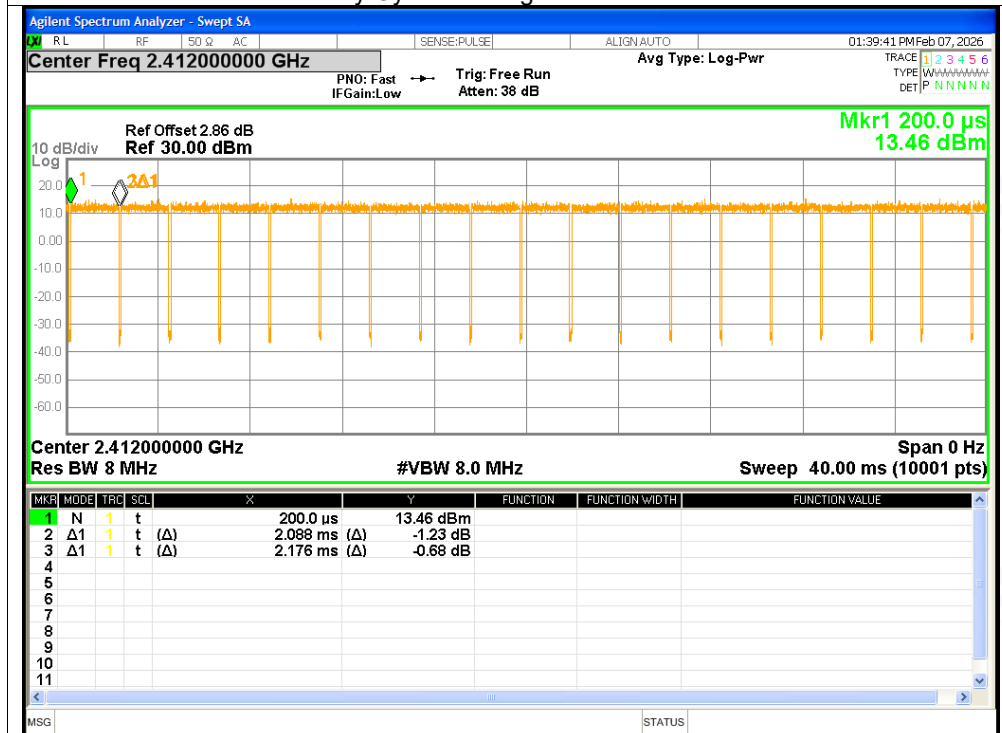




Duty Cycle NVNT g 2437MHz Ant2

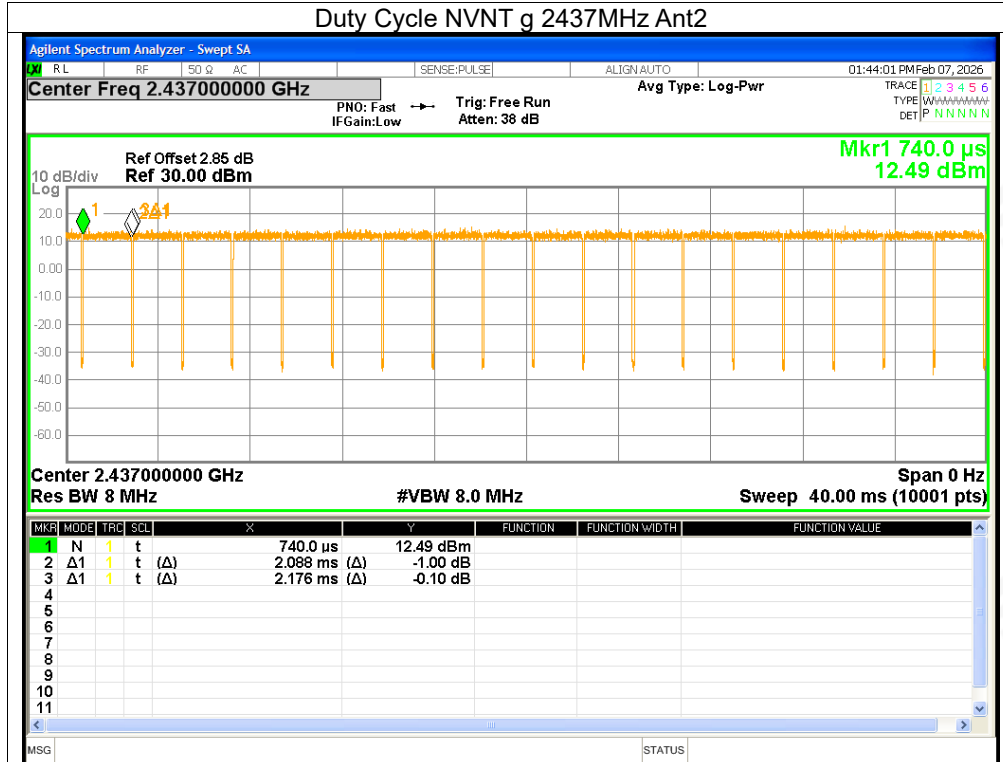


Duty Cycle NVNT g 2462MHz Ant2

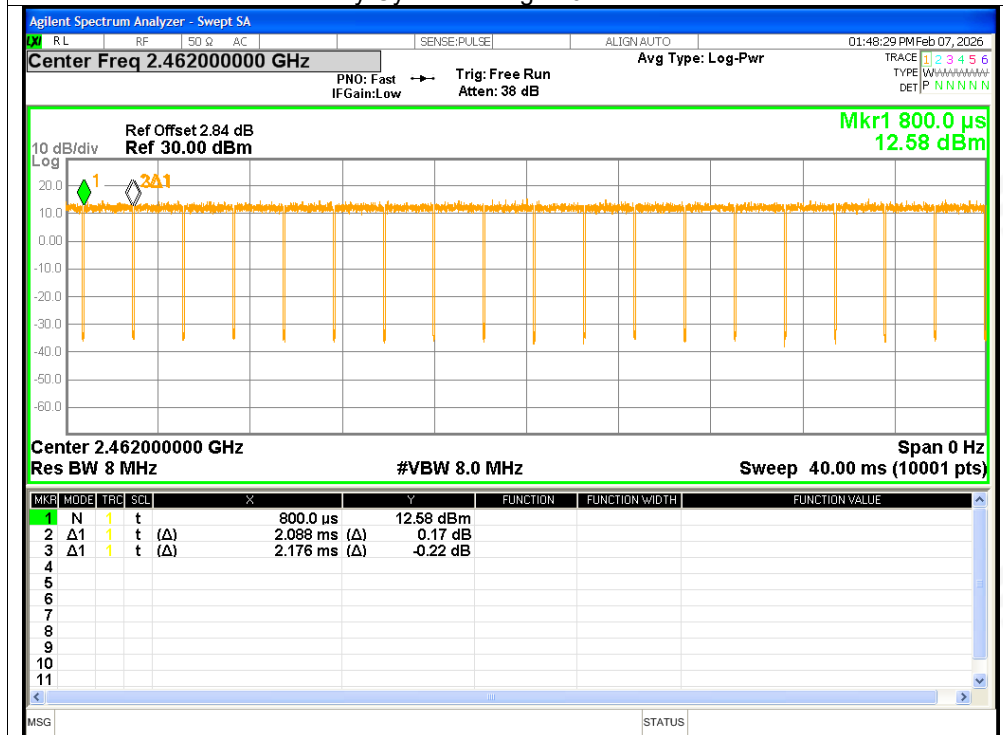




Duty Cycle NVNT n20 2412MHz MIMO

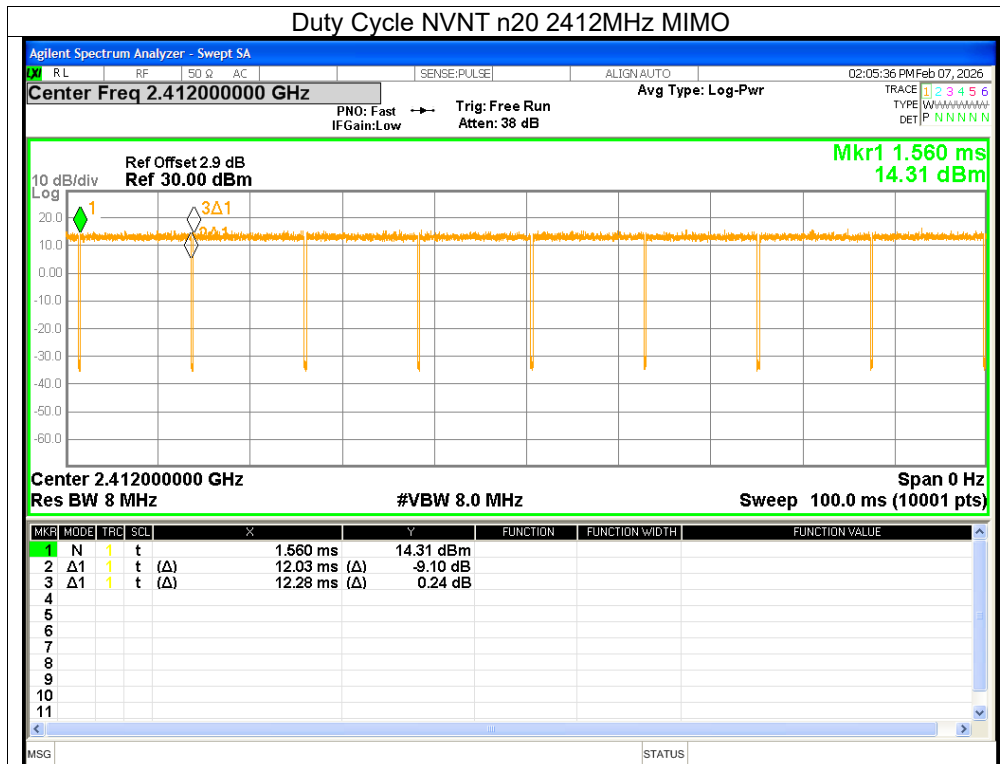


Duty Cycle NVNT n20 2437MHz MIMO

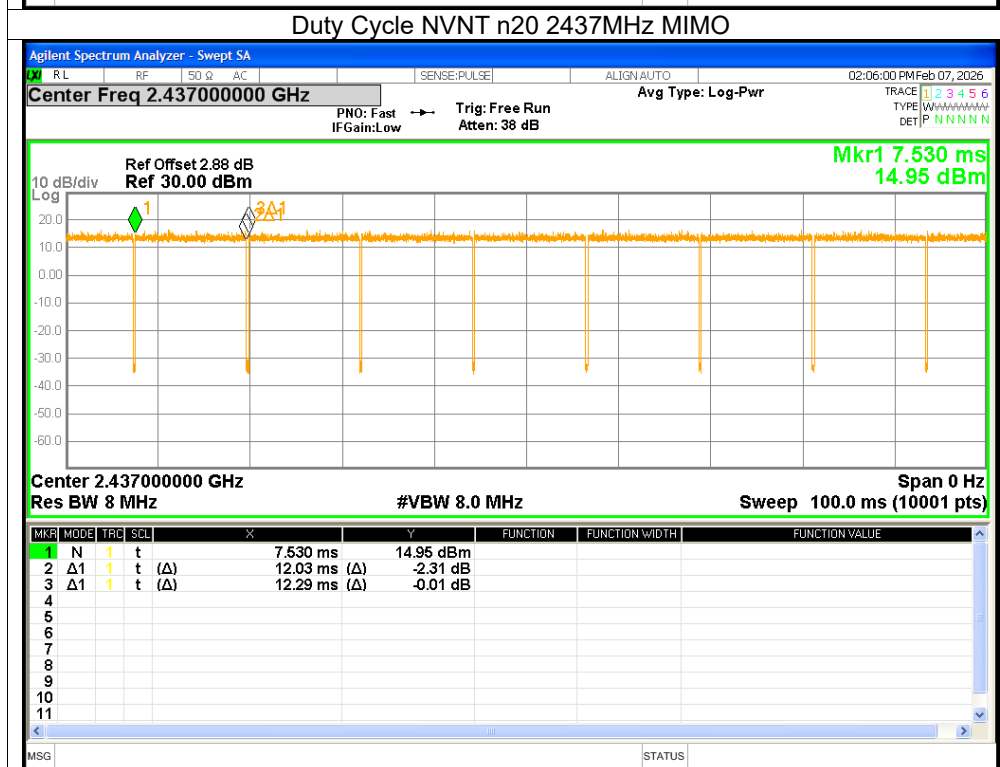




Duty Cycle NVNT n20 2462MHz MIMO

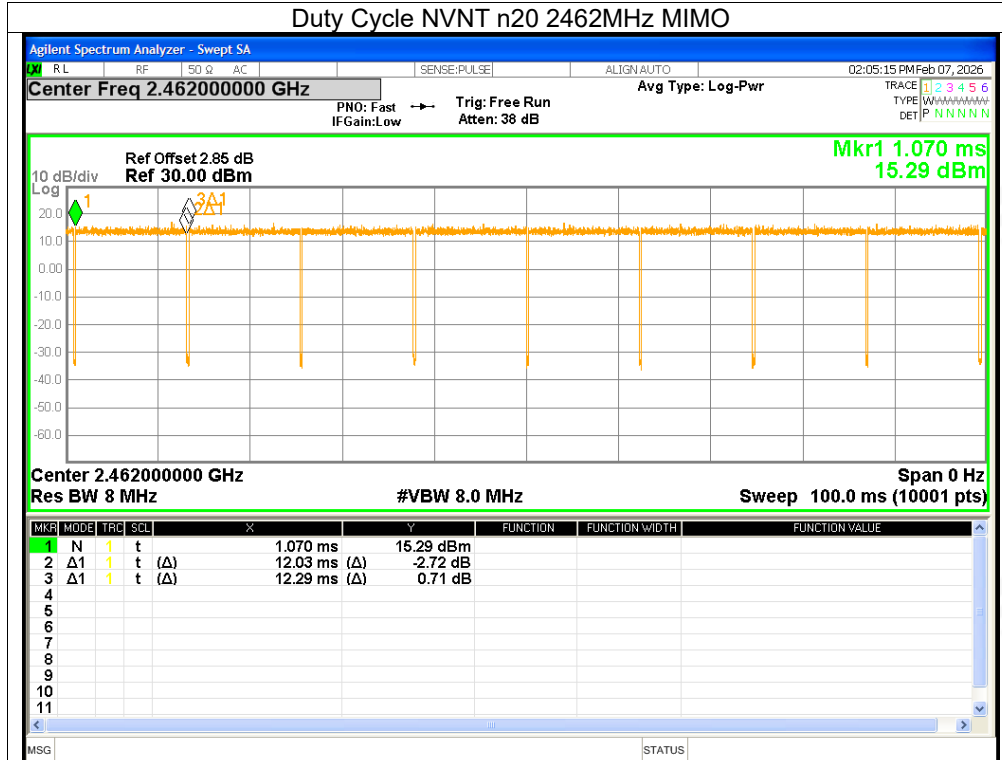


Duty Cycle NVNT n40 2422MHz MIMO

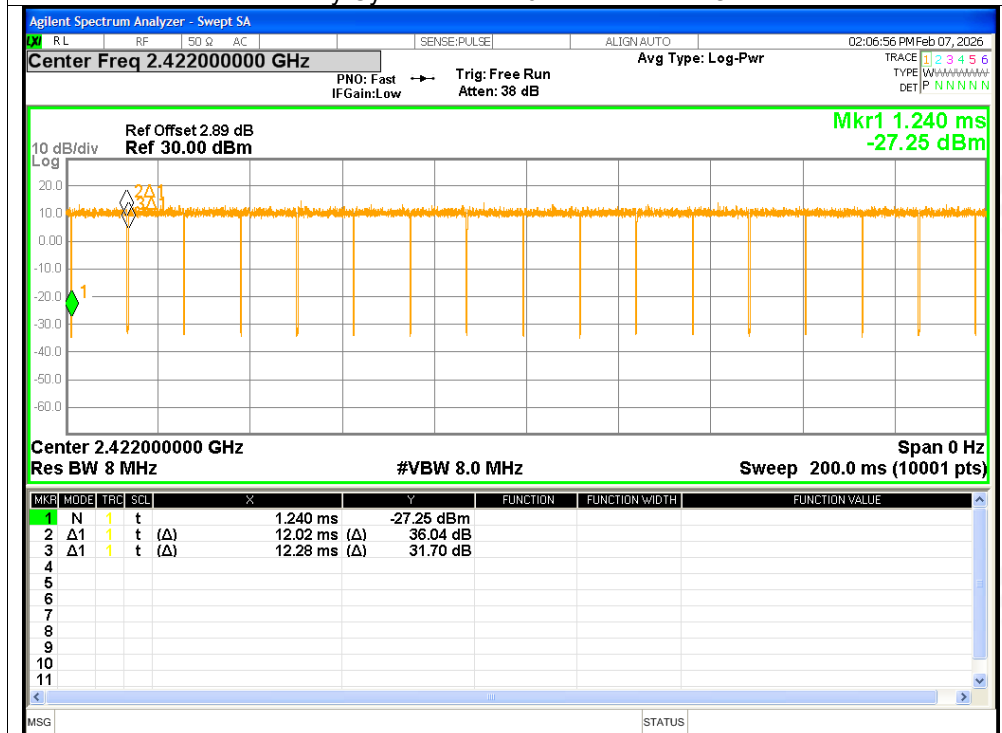




Duty Cycle NVNT n40 2437MHz MIMO

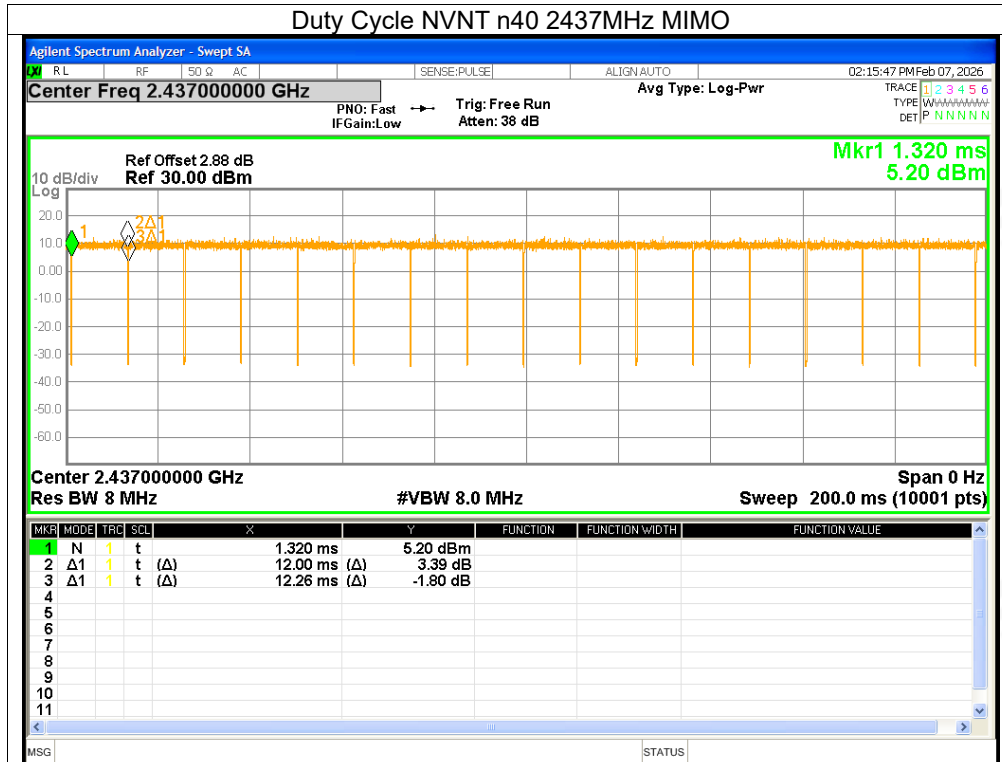


Duty Cycle NVNT n40 2452MHz MIMO

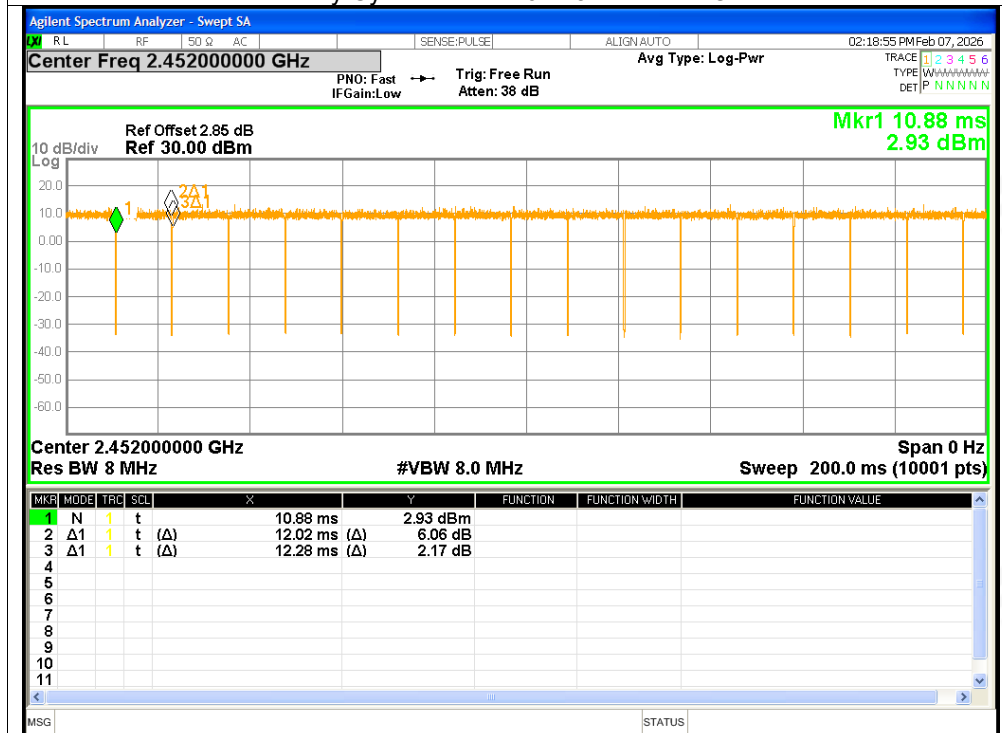




Duty Cycle NVNT ax20 2412MHz MIMO

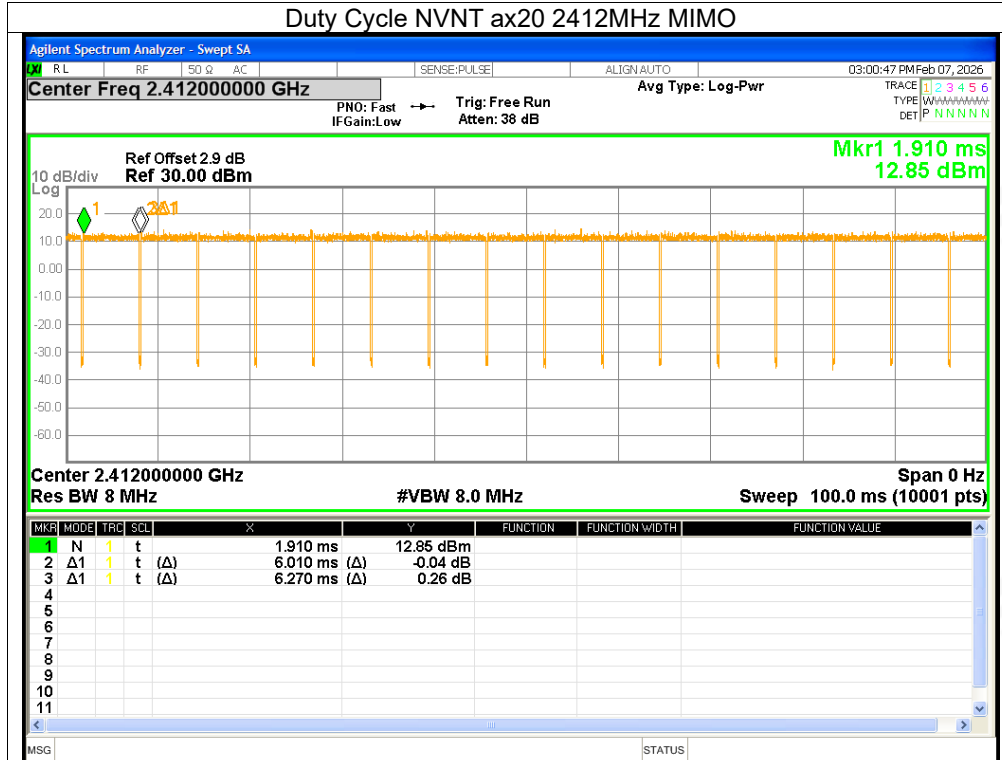


Duty Cycle NVNT ax20 2437MHz MIMO

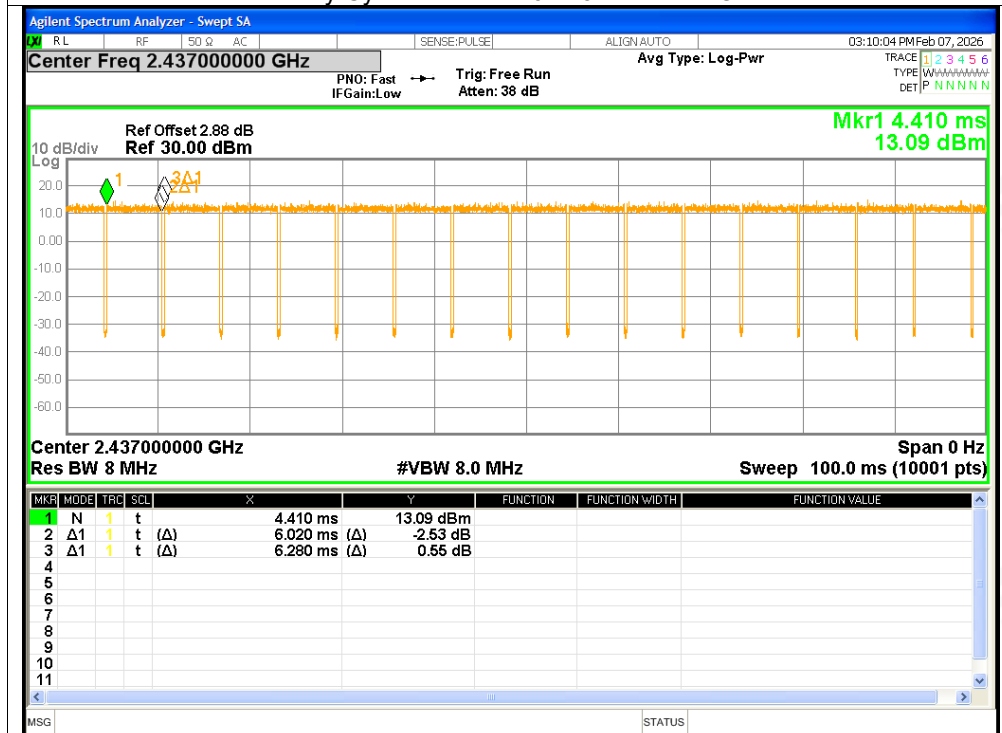




Duty Cycle NVNT ax20 2462MHz MIMO

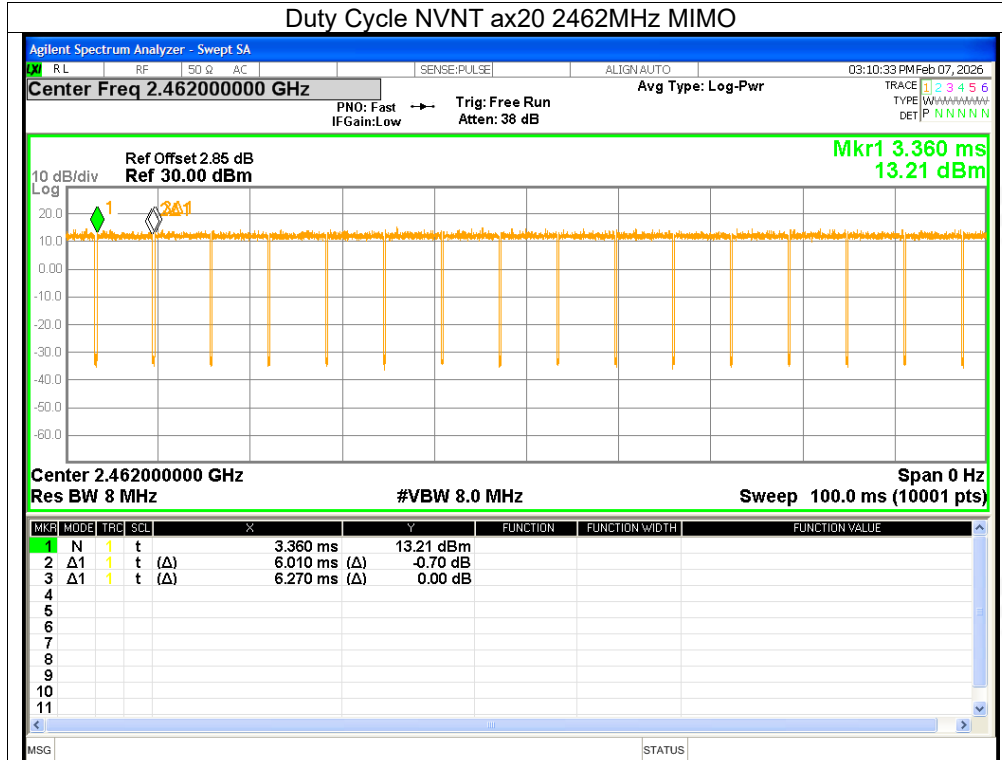


Duty Cycle NVNT ax40 2422MHz MIMO

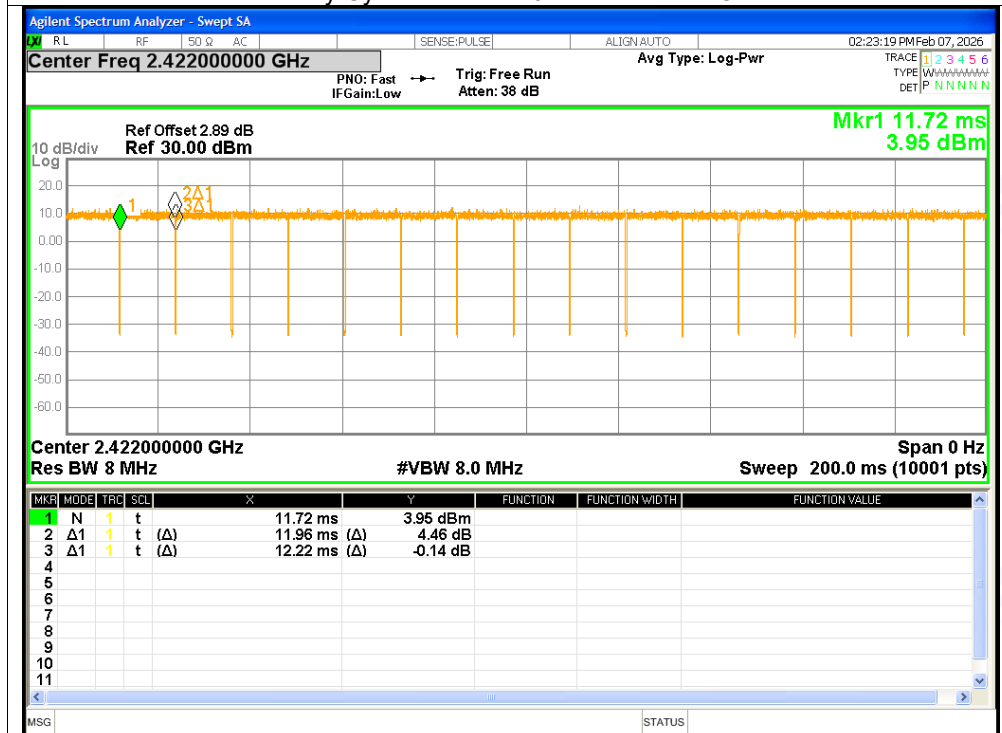




Duty Cycle NVNT ax40 2437MHz MIMO

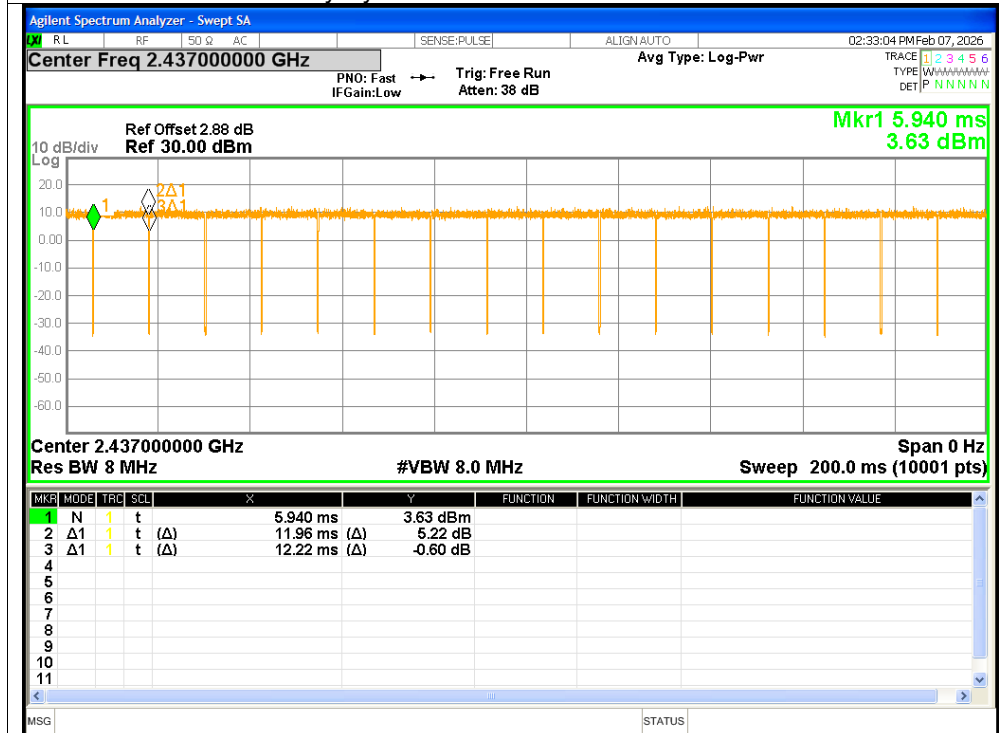


Duty Cycle NVNT ax40 2452MHz MIMO

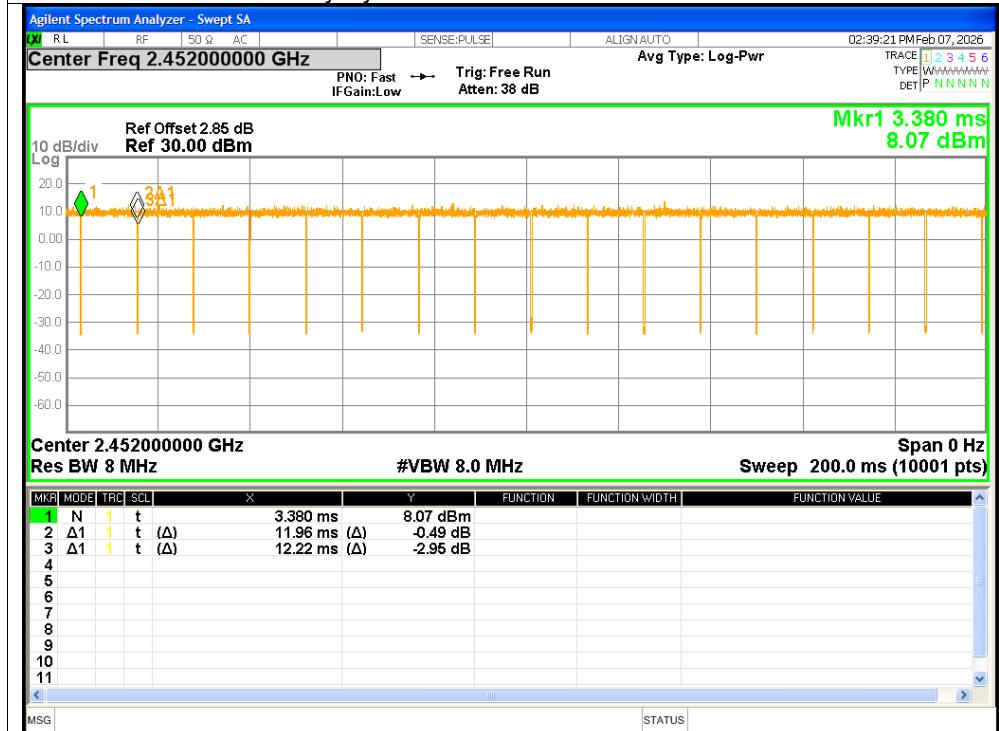




Duty Cycle NVNT be20 2412MHz MIMO

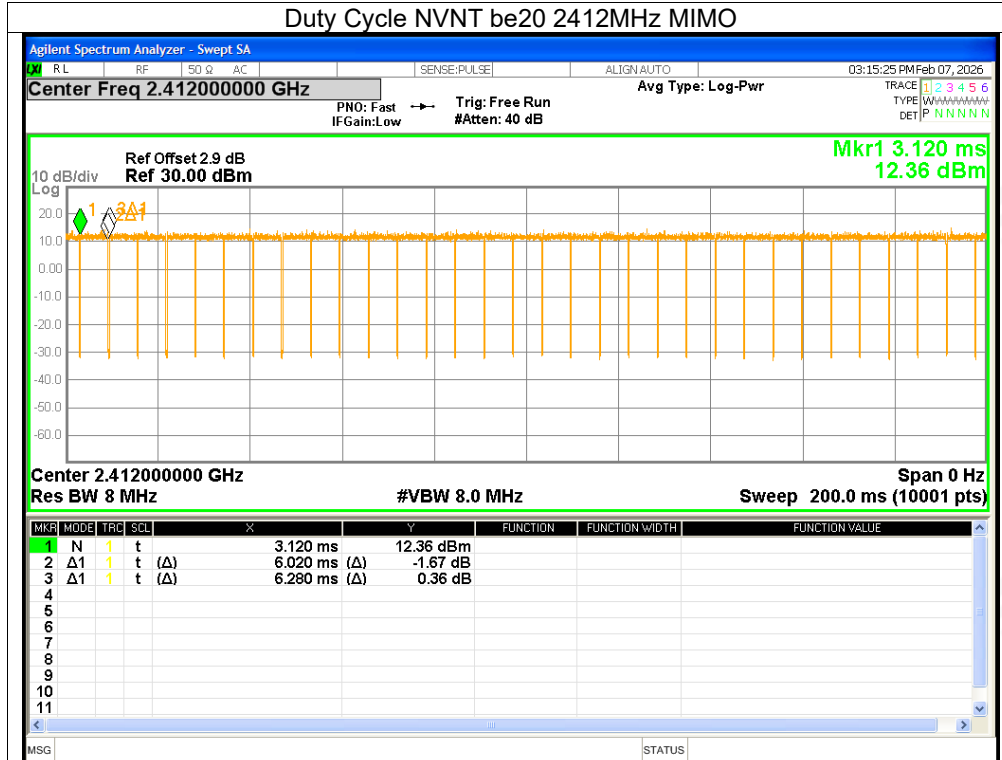


Duty Cycle NVNT be20 2437MHz MIMO

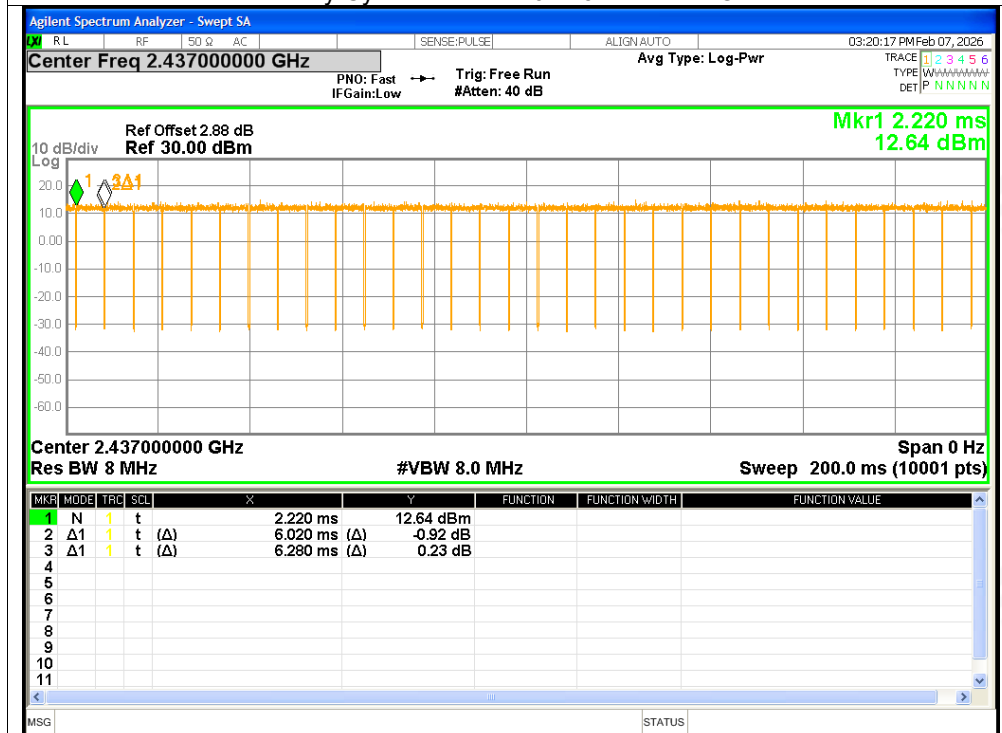




Duty Cycle NVNT be20 2462MHz MIMO

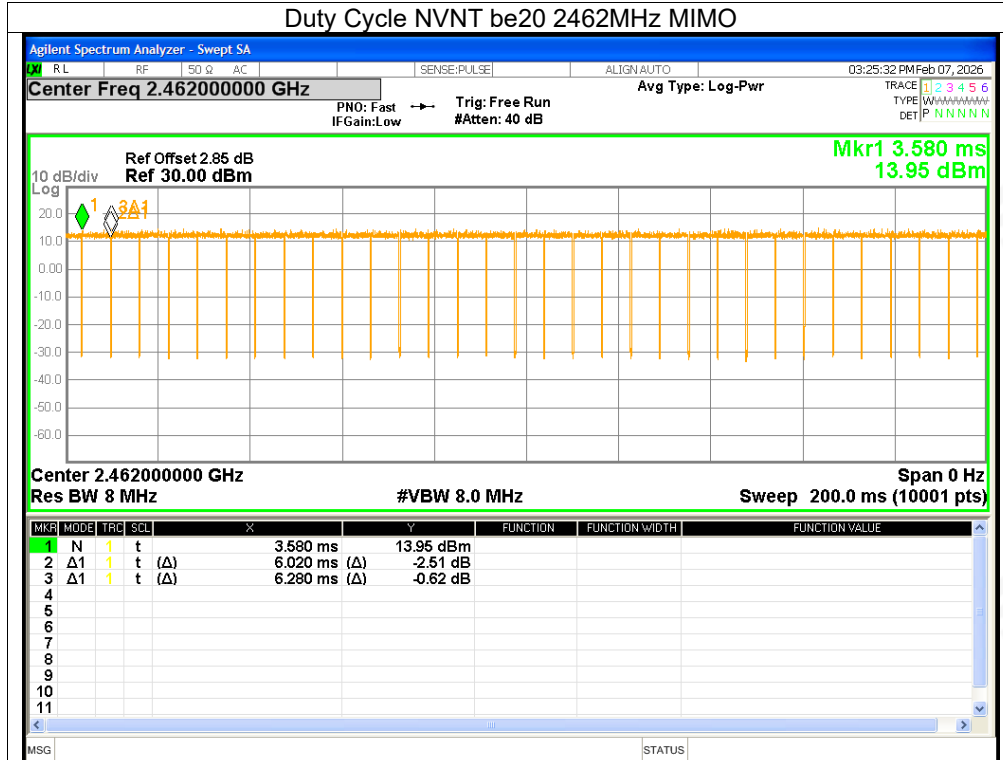


Duty Cycle NVNT be40 2422MHz MIMO

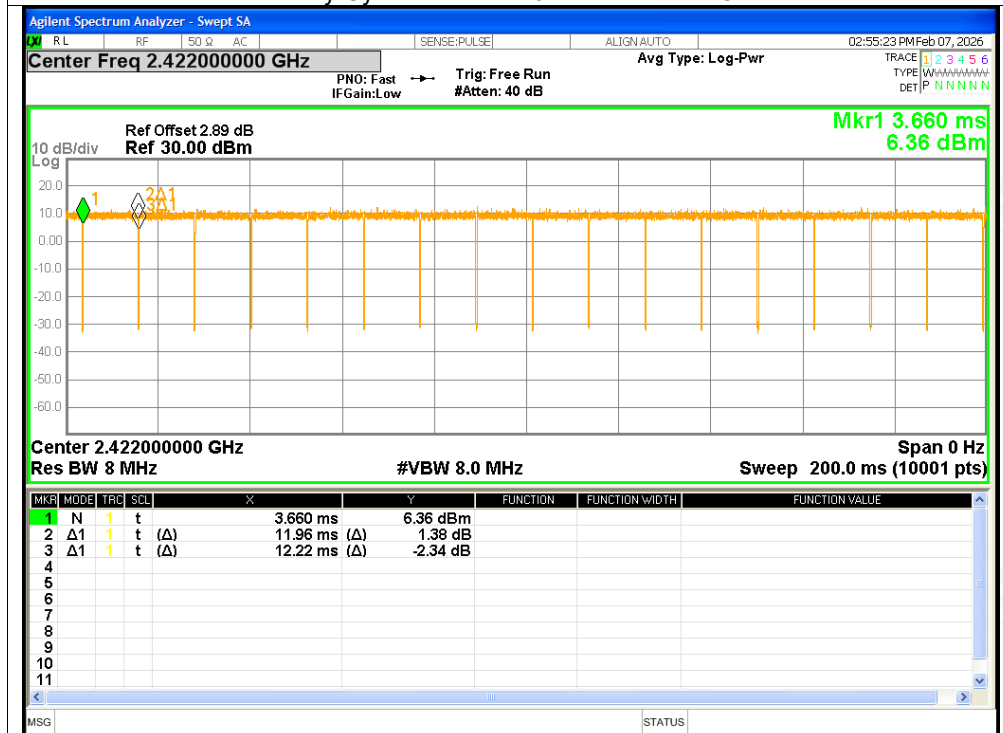




Duty Cycle NVNT be40 2437MHz MIMO

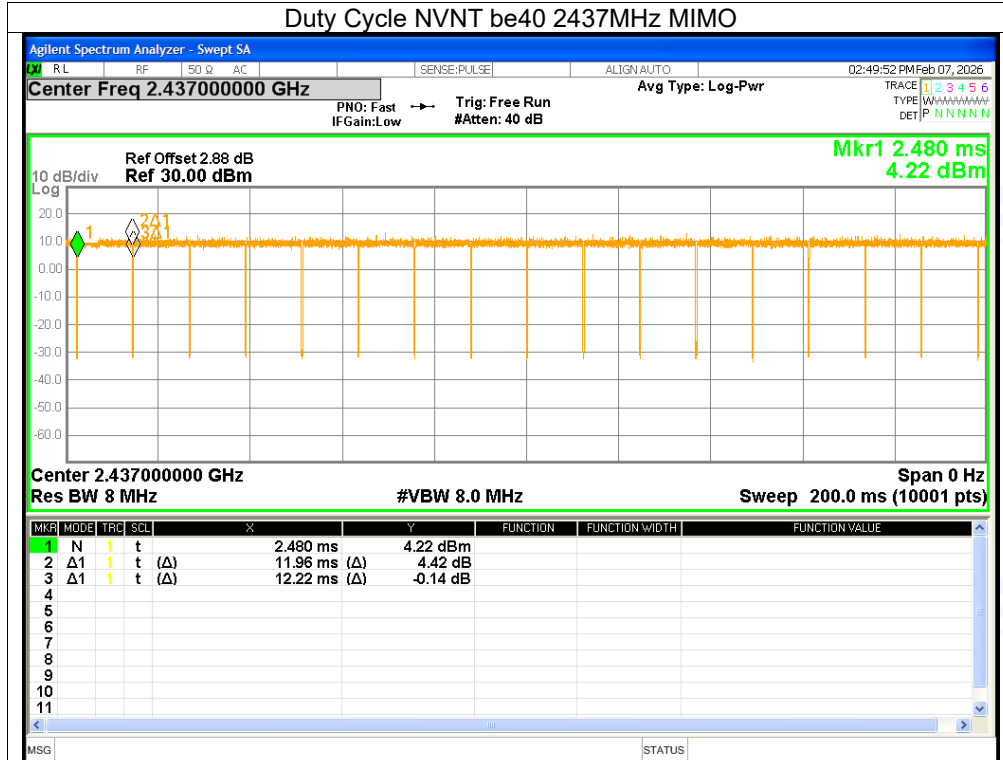

Duty Cycle NVNT be40 2452MHz MIMO

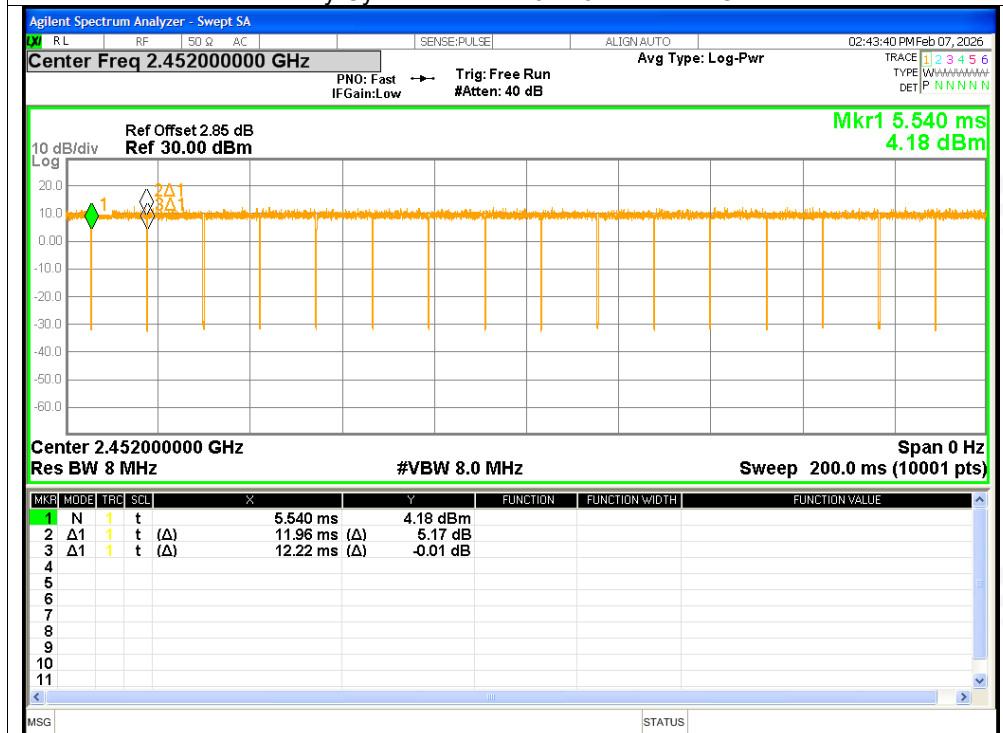



Maximum Peak Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	15.83	<=30	Pass
NVNT	b	2437	Ant1	16.18	<=30	Pass
NVNT	b	2462	Ant1	16.34	<=30	Pass
NVNT	b	2412	Ant2	15.16	<=30	Pass
NVNT	b	2437	Ant2	15.19	<=30	Pass
NVNT	b	2462	Ant2	15.1	<=30	Pass
NVNT	g	2412	Ant1	16.18	<=30	Pass
NVNT	g	2437	Ant1	16.73	<=30	Pass
NVNT	g	2462	Ant1	16.92	<=30	Pass
NVNT	g	2412	Ant2	15.53	<=30	Pass
NVNT	g	2437	Ant2	15.8	<=30	Pass
NVNT	g	2462	Ant2	15.7	<=30	Pass
NVNT	n20	2412	Ant1	16.13	<=30	Pass
NVNT	n20	2412	Ant2	15.76	<=30	Pass
NVNT	n20	2412	MIMO	18.96	<=30	Pass
NVNT	n20	2437	Ant1	16.54	<=30	Pass
NVNT	n20	2437	Ant2	15.77	<=30	Pass
NVNT	n20	2437	MIMO	19.18	<=30	Pass
NVNT	n20	2462	Ant1	16.73	<=30	Pass
NVNT	n20	2462	Ant2	15.6	<=30	Pass
NVNT	n20	2462	MIMO	19.21	<=30	Pass
NVNT	n40	2422	Ant1	16.09	<=30	Pass
NVNT	n40	2422	Ant2	15.63	<=30	Pass
NVNT	n40	2422	MIMO	18.88	<=30	Pass
NVNT	n40	2437	Ant1	14.92	<=30	Pass
NVNT	n40	2437	Ant2	14.3	<=30	Pass
NVNT	n40	2437	MIMO	17.63	<=30	Pass
NVNT	n40	2452	Ant1	14.9	<=30	Pass
NVNT	n40	2452	Ant2	14.44	<=30	Pass
NVNT	n40	2452	MIMO	17.69	<=30	Pass
NVNT	ax20	2412	Ant1	15.15	<=30	Pass
NVNT	ax20	2412	Ant2	14.78	<=30	Pass
NVNT	ax20	2412	MIMO	17.98	<=30	Pass
NVNT	ax20	2437	Ant1	15.59	<=30	Pass
NVNT	ax20	2437	Ant2	14.84	<=30	Pass
NVNT	ax20	2437	MIMO	18.24	<=30	Pass
NVNT	ax20	2462	Ant1	15.75	<=30	Pass
NVNT	ax20	2462	Ant2	14.73	<=30	Pass
NVNT	ax20	2462	MIMO	18.28	<=30	Pass
NVNT	ax40	2422	Ant1	15.56	<=30	Pass
NVNT	ax40	2422	Ant2	15.2	<=30	Pass
NVNT	ax40	2422	MIMO	18.39	<=30	Pass
NVNT	ax40	2437	Ant1	15.64	<=30	Pass
NVNT	ax40	2437	Ant2	14.98	<=30	Pass
NVNT	ax40	2437	MIMO	18.33	<=30	Pass
NVNT	ax40	2452	Ant1	15.84	<=30	Pass
NVNT	ax40	2452	Ant2	15.24	<=30	Pass
NVNT	ax40	2452	MIMO	18.56	<=30	Pass
NVNT	be20	2412	Ant1	15.37	<=30	Pass
NVNT	be20	2412	Ant2	14.67	<=30	Pass
NVNT	be20	2412	MIMO	18.04	<=30	Pass
NVNT	be20	2437	Ant1	15.45	<=30	Pass
NVNT	be20	2437	Ant2	14.77	<=30	Pass
NVNT	be20	2437	MIMO	18.13	<=30	Pass
NVNT	be20	2462	Ant1	15.97	<=30	Pass
NVNT	be20	2462	Ant2	14.89	<=30	Pass
NVNT	be20	2462	MIMO	18.47	<=30	Pass
NVNT	be40	2422	Ant1	15.73	<=30	Pass
NVNT	be40	2422	Ant2	15.12	<=30	Pass
NVNT	be40	2422	MIMO	18.45	<=30	Pass
NVNT	be40	2437	Ant1	15.71	<=30	Pass



NVNT	be40	2437	Ant2	15.19	<=30	Pass
NVNT	be40	2437	MIMO	18.47	<=30	Pass
NVNT	be40	2452	Ant1	15.95	<=30	Pass
NVNT	be40	2452	Ant2	15.21	<=30	Pass
NVNT	be40	2452	MIMO	18.61	<=30	Pass


**-6dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	10.18	≥ 0.5	Pass
NVNT	b	2437	Ant1	10.18	≥ 0.5	Pass
NVNT	b	2462	Ant1	10.18	≥ 0.5	Pass
NVNT	b	2412	Ant2	10.18	≥ 0.5	Pass
NVNT	b	2437	Ant2	10.18	≥ 0.5	Pass
NVNT	b	2462	Ant2	10.18	≥ 0.5	Pass
NVNT	g	2412	Ant1	15.71	≥ 0.5	Pass
NVNT	g	2437	Ant1	16.09	≥ 0.5	Pass
NVNT	g	2462	Ant1	15.89	≥ 0.5	Pass
NVNT	g	2412	Ant2	15.83	≥ 0.5	Pass
NVNT	g	2437	Ant2	15.85	≥ 0.5	Pass
NVNT	g	2462	Ant2	16.02	≥ 0.5	Pass
NVNT	n20	2412	Ant1	17.44	≥ 0.5	Pass
NVNT	n20	2412	Ant2	17.14	≥ 0.5	Pass
NVNT	n20	2437	Ant1	16.49	≥ 0.5	Pass
NVNT	n20	2437	Ant2	17.4	≥ 0.5	Pass
NVNT	n20	2462	Ant1	17	≥ 0.5	Pass
NVNT	n20	2462	Ant2	17.39	≥ 0.5	Pass
NVNT	n40	2422	Ant1	35.53	≥ 0.5	Pass
NVNT	n40	2422	Ant2	35.59	≥ 0.5	Pass
NVNT	n40	2437	Ant1	35.28	≥ 0.5	Pass
NVNT	n40	2437	Ant2	31.27	≥ 0.5	Pass
NVNT	n40	2452	Ant1	35.49	≥ 0.5	Pass
NVNT	n40	2452	Ant2	35.42	≥ 0.5	Pass
NVNT	ax20	2412	Ant1	18.07	≥ 0.5	Pass
NVNT	ax20	2412	Ant2	17.86	≥ 0.5	Pass
NVNT	ax20	2437	Ant1	18.82	≥ 0.5	Pass
NVNT	ax20	2437	Ant2	18.3	≥ 0.5	Pass
NVNT	ax20	2462	Ant1	17.77	≥ 0.5	Pass
NVNT	ax20	2462	Ant2	18.93	≥ 0.5	Pass
NVNT	ax40	2422	Ant1	37.5	≥ 0.5	Pass
NVNT	ax40	2422	Ant2	37.12	≥ 0.5	Pass
NVNT	ax40	2437	Ant1	36.86	≥ 0.5	Pass
NVNT	ax40	2437	Ant2	31.67	≥ 0.5	Pass
NVNT	ax40	2452	Ant1	36.75	≥ 0.5	Pass
NVNT	ax40	2452	Ant2	36.08	≥ 0.5	Pass
NVNT	be20	2412	Ant1	18.48	≥ 0.5	Pass
NVNT	be20	2412	Ant2	17.78	≥ 0.5	Pass
NVNT	be20	2437	Ant1	18.4	≥ 0.5	Pass
NVNT	be20	2437	Ant2	18.79	≥ 0.5	Pass
NVNT	be20	2462	Ant1	16.78	≥ 0.5	Pass
NVNT	be20	2462	Ant2	18.84	≥ 0.5	Pass
NVNT	be40	2422	Ant1	35.14	≥ 0.5	Pass
NVNT	be40	2422	Ant2	36.29	≥ 0.5	Pass
NVNT	be40	2437	Ant1	35.69	≥ 0.5	Pass
NVNT	be40	2437	Ant2	32.14	≥ 0.5	Pass
NVNT	be40	2452	Ant1	36.76	≥ 0.5	Pass
NVNT	be40	2452	Ant2	36.6	≥ 0.5	Pass

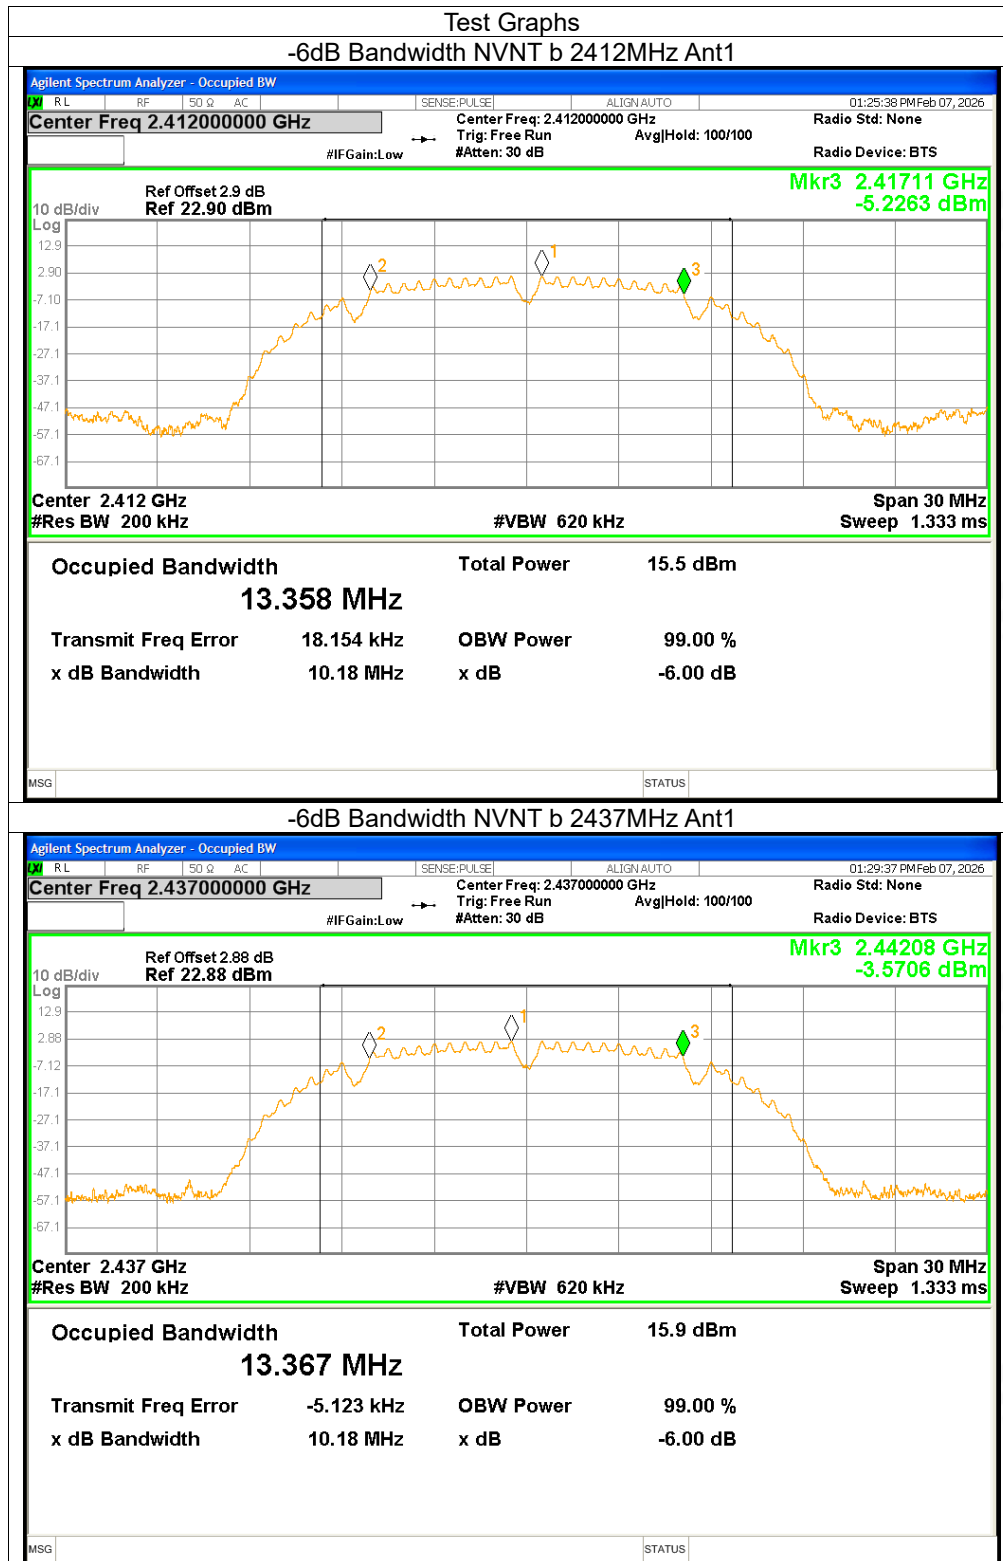






-6dB Bandwidth NVNT b 2462MHz Ant1

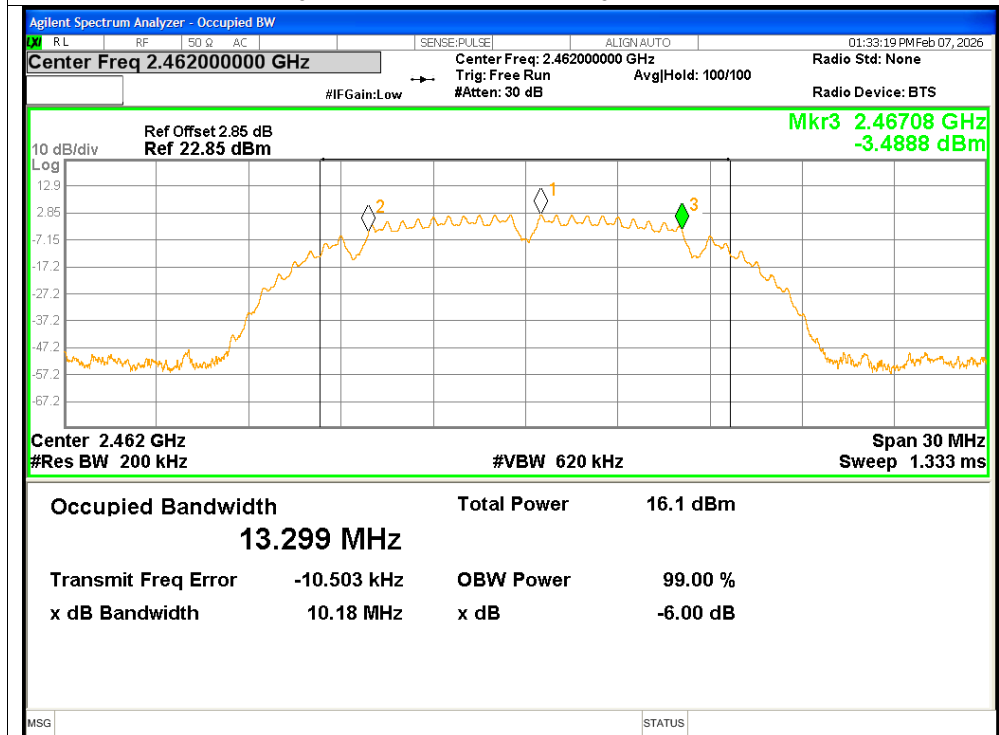

-6dB Bandwidth NVNT b 2412MHz Ant2

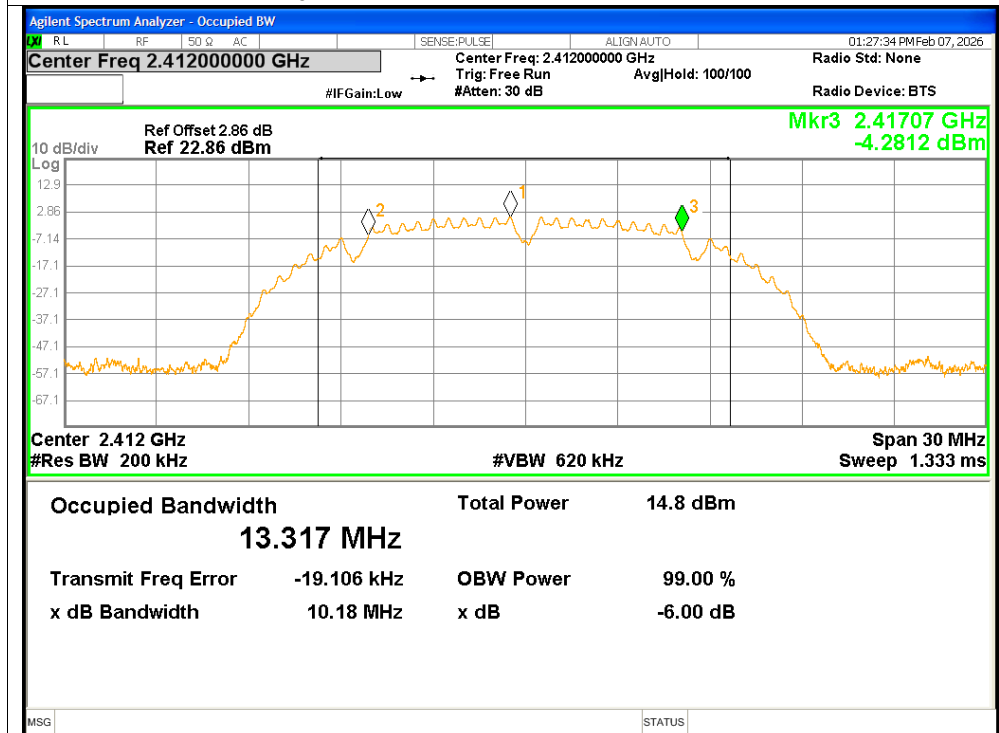


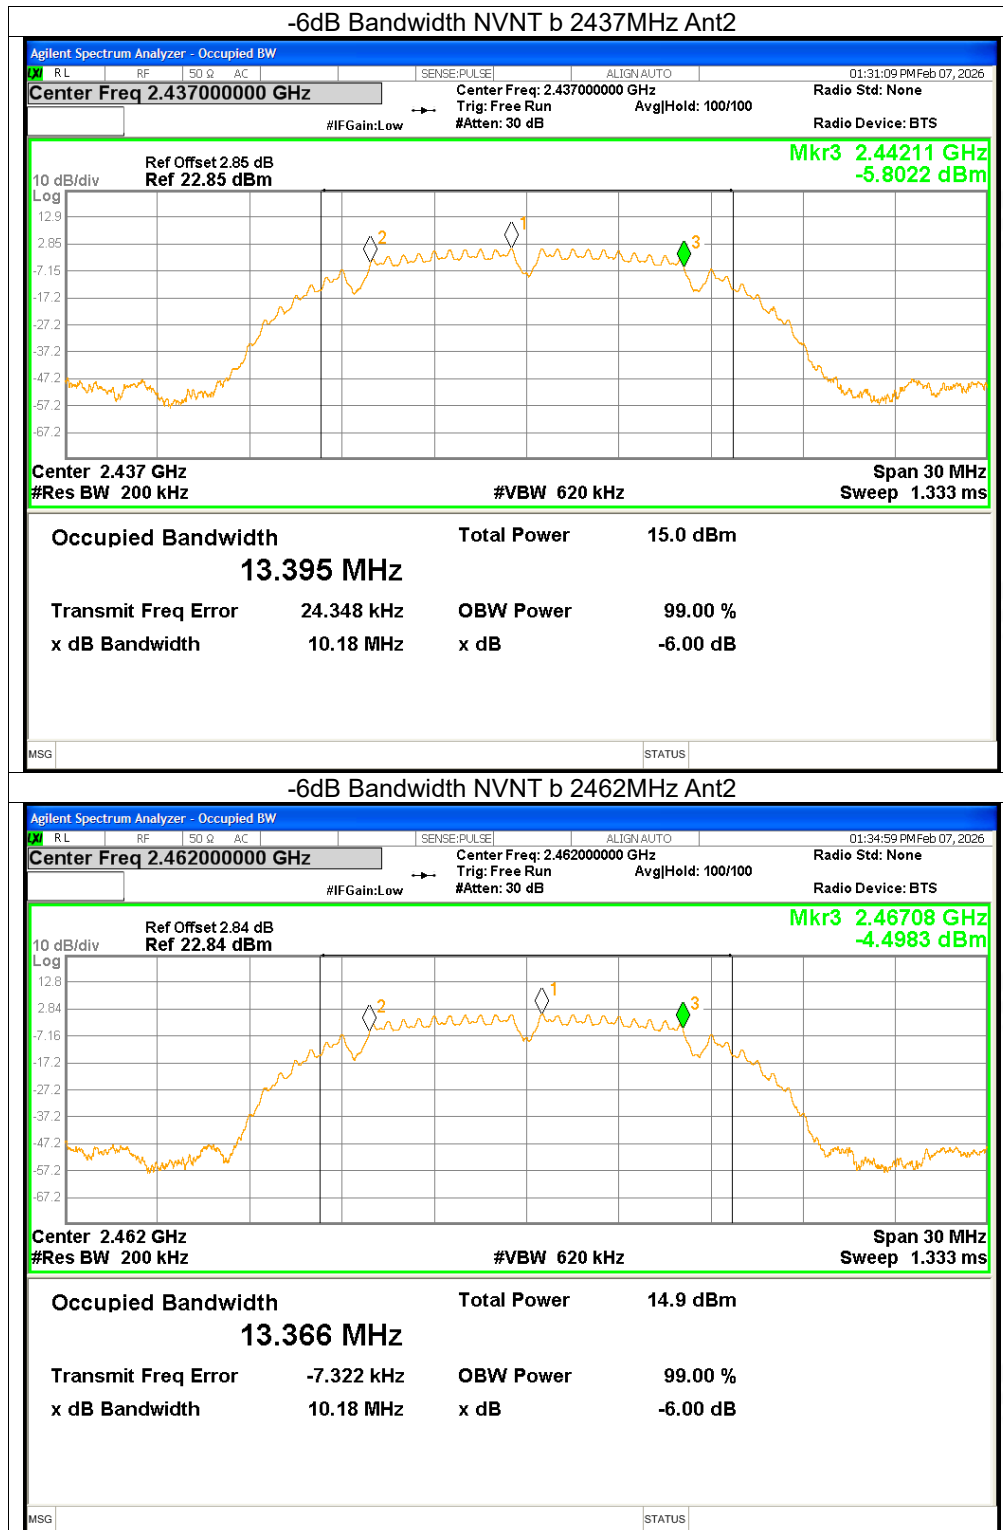

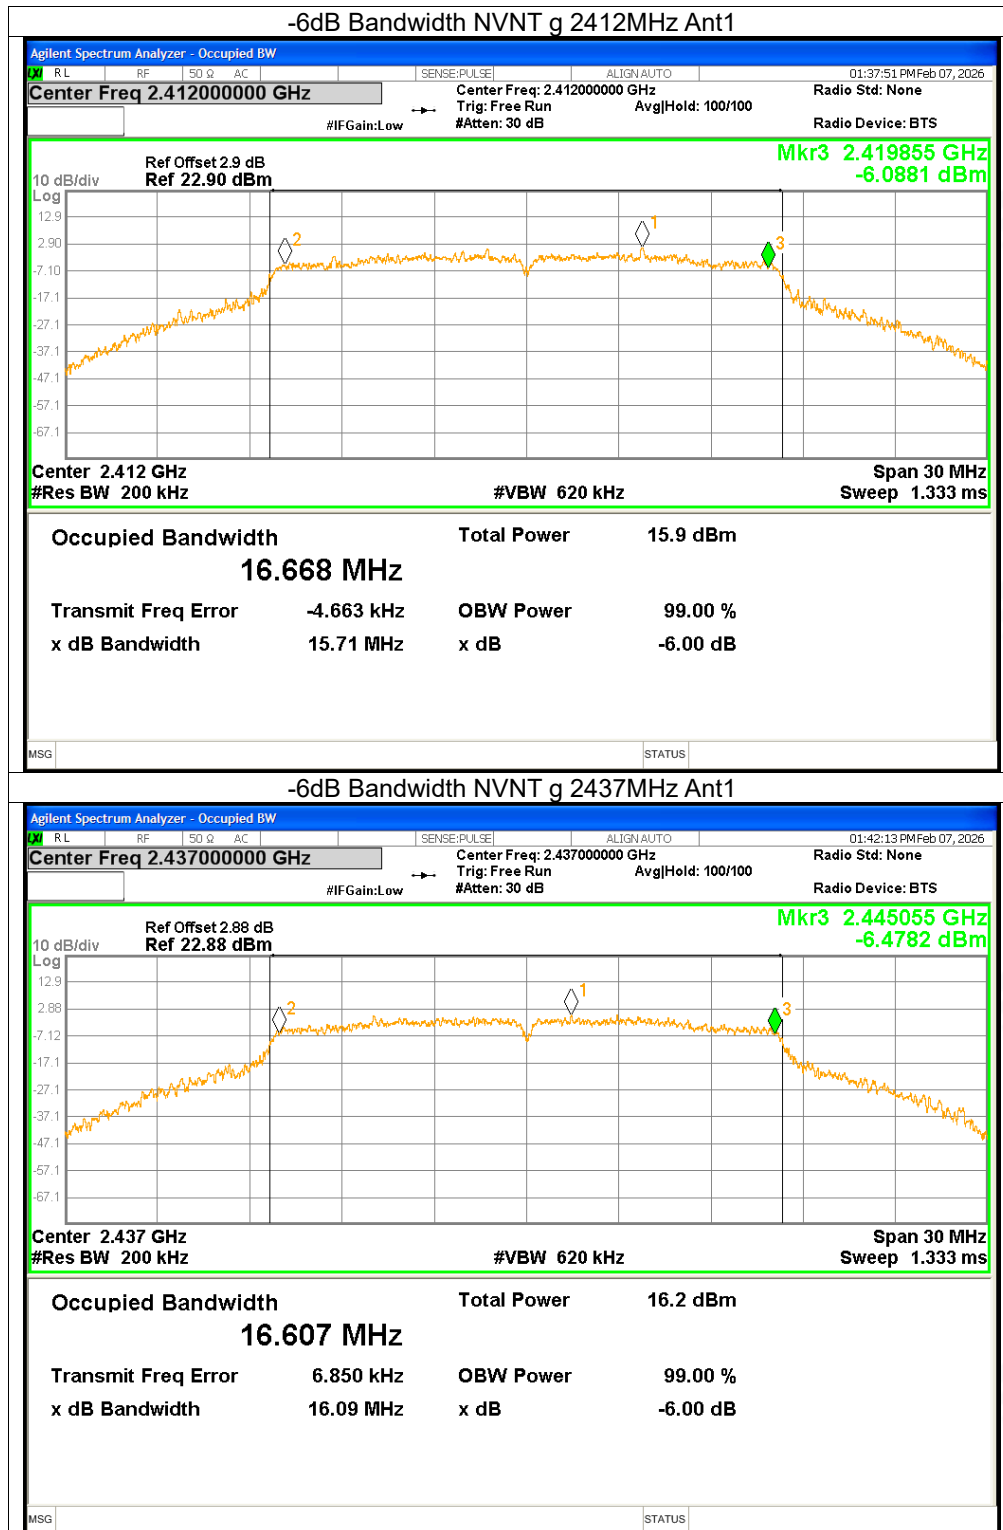




-6dB Bandwidth NVNT g 2462MHz Ant1

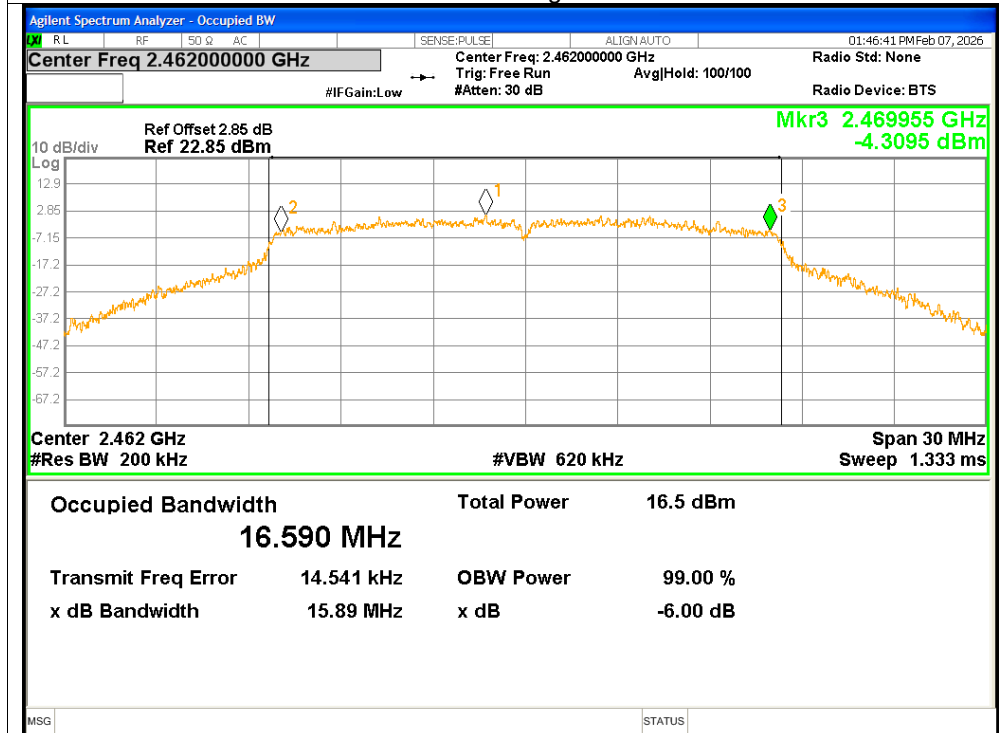


-6dB Bandwidth NVNT g 2412MHz Ant2

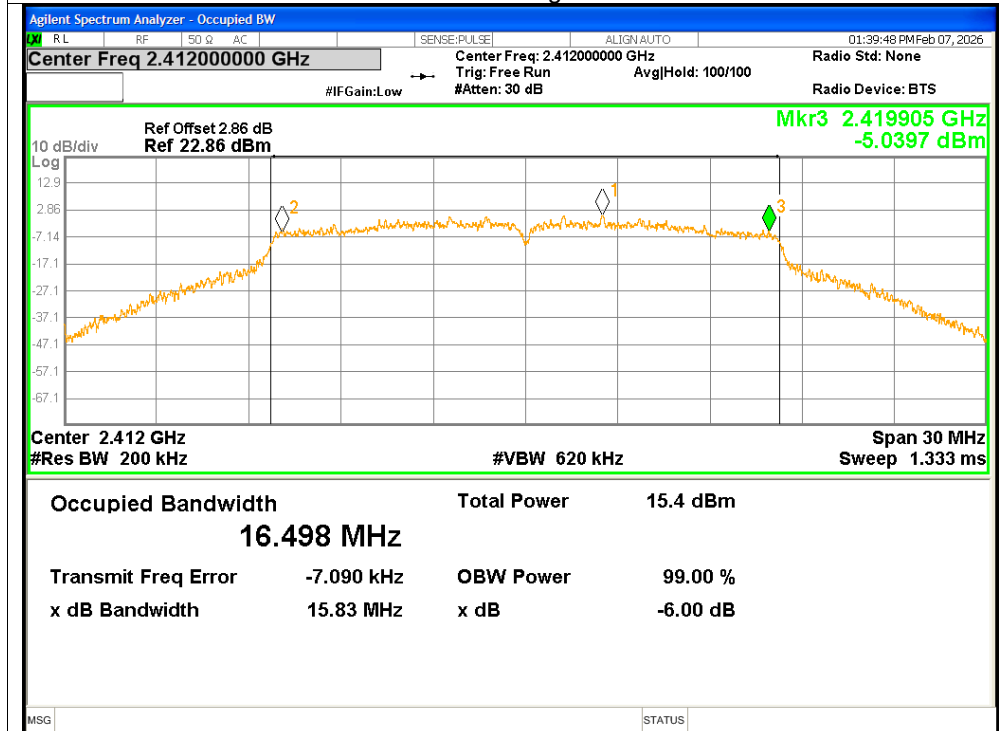




-6dB Bandwidth NVNT g 2437MHz Ant2

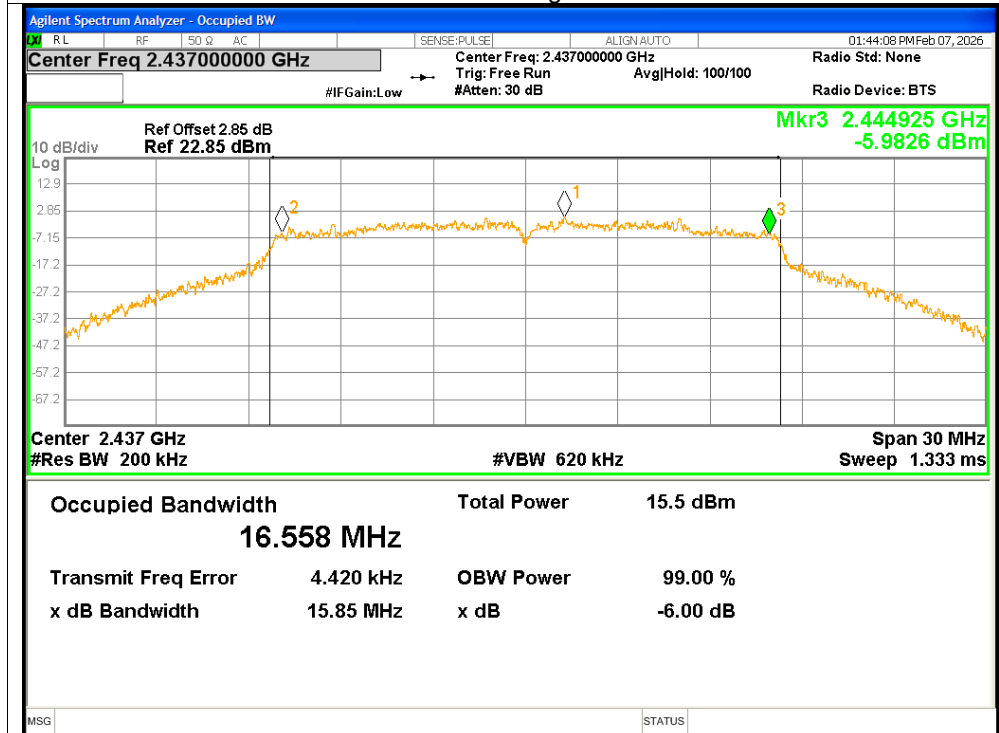


-6dB Bandwidth NVNT g 2462MHz Ant2

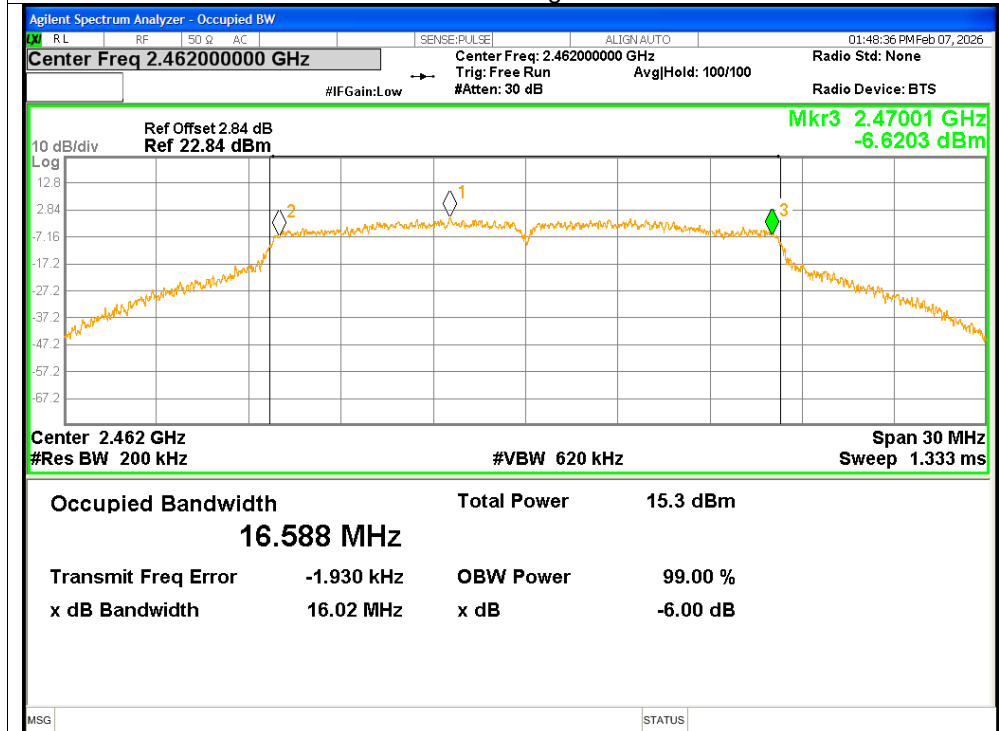




-6dB Bandwidth NVNT n20 2412MHz Ant1

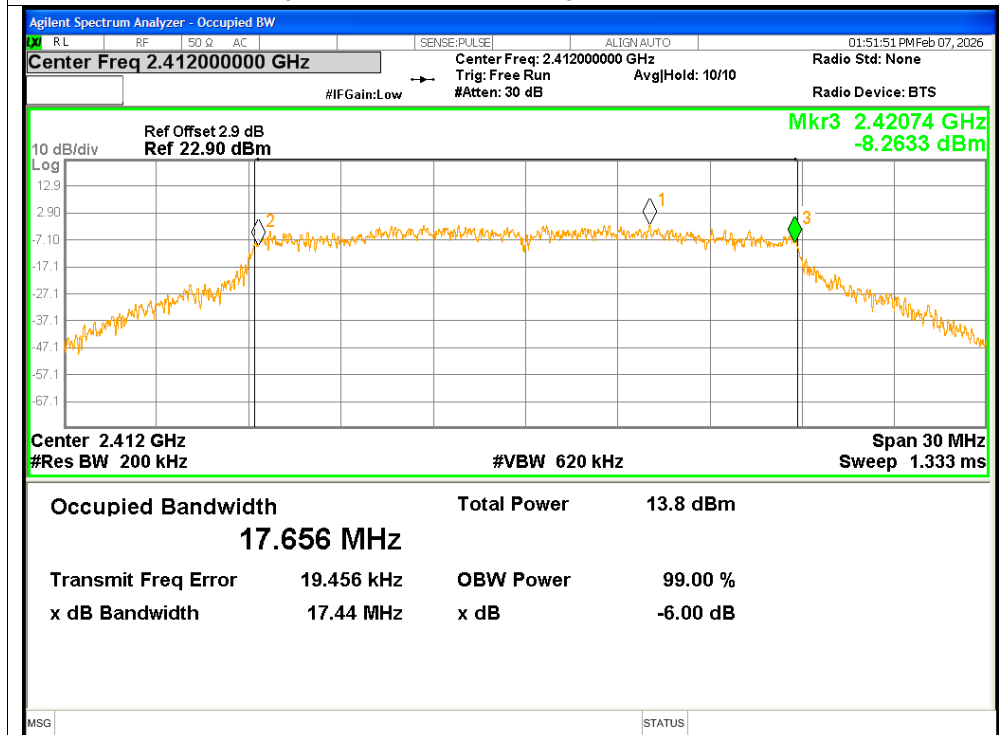


-6dB Bandwidth NVNT n20 2412MHz Ant2

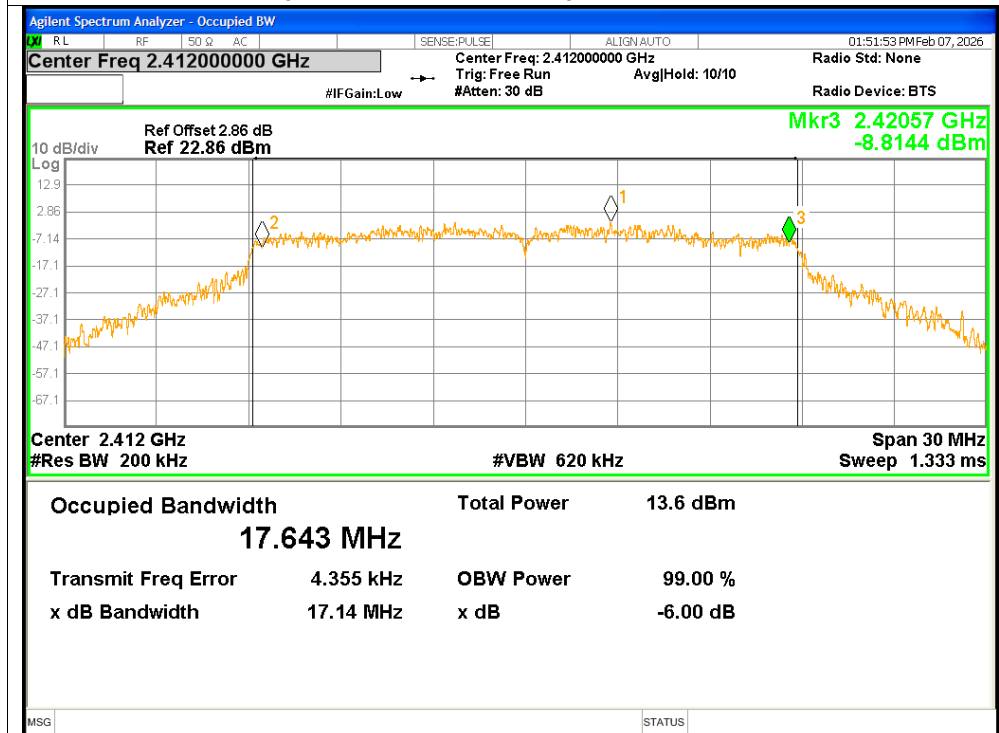




-6dB Bandwidth NVNT n20 2437MHz Ant1

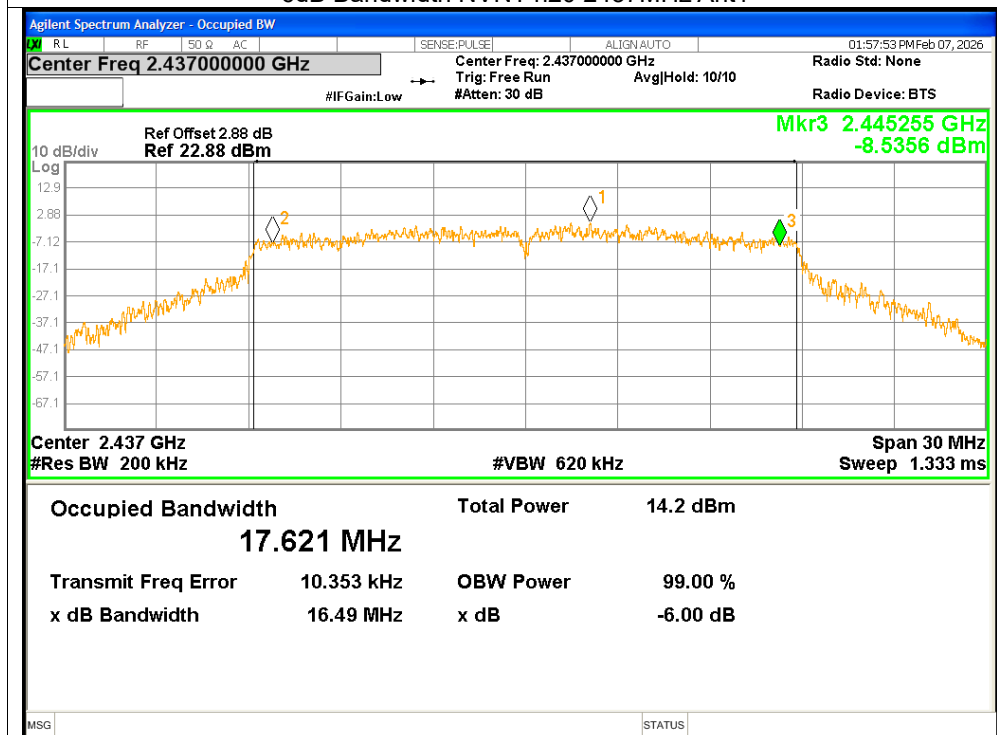


-6dB Bandwidth NVNT n20 2437MHz Ant2

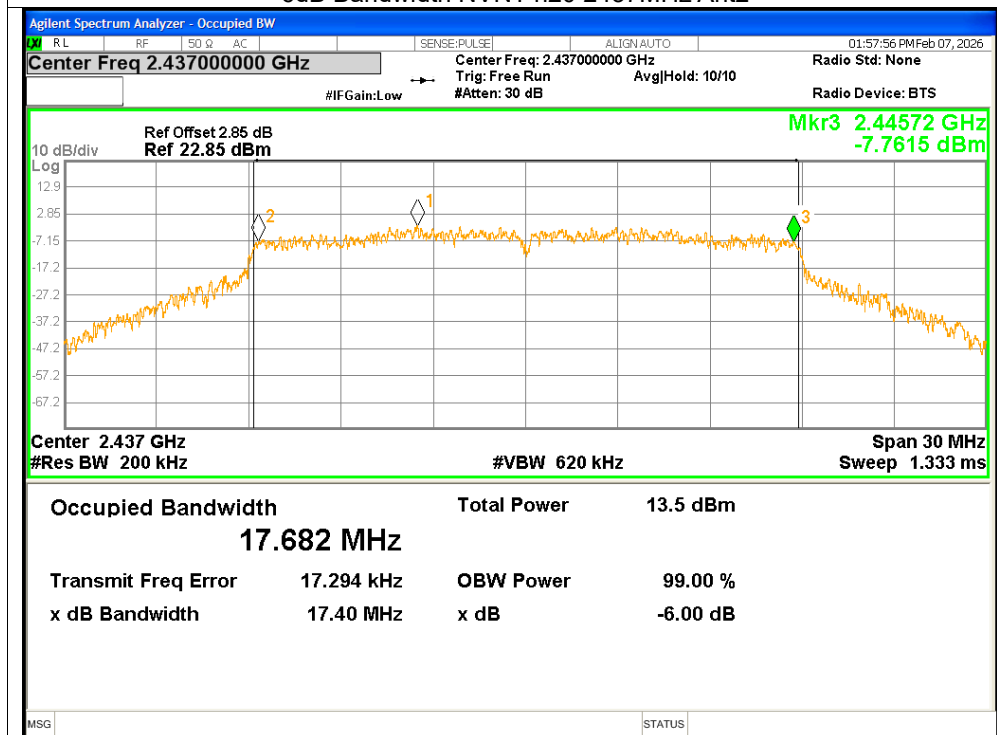




-6dB Bandwidth NVNT n20 2462MHz Ant1

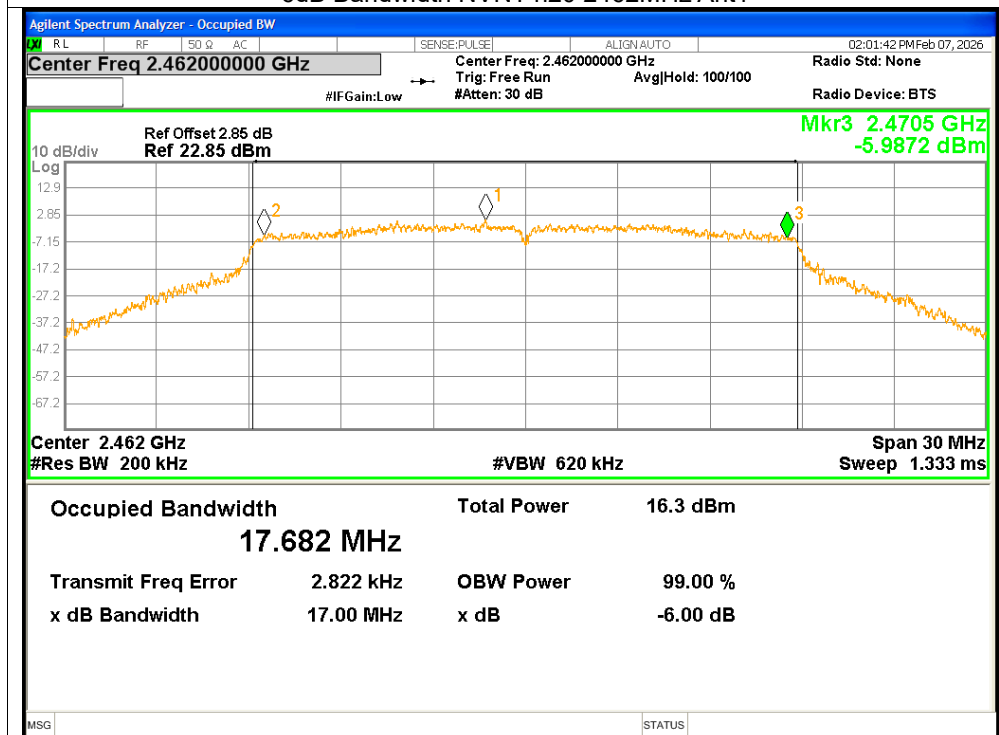


-6dB Bandwidth NVNT n20 2462MHz Ant2

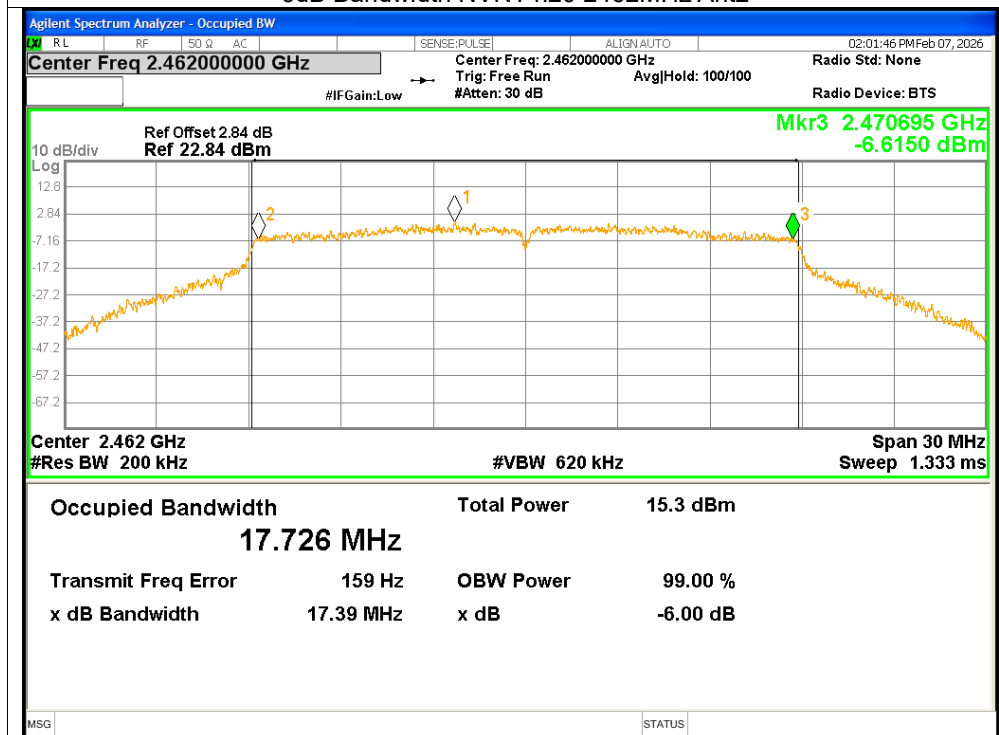








-6dB Bandwidth NVNT n40 2422MHz Ant1

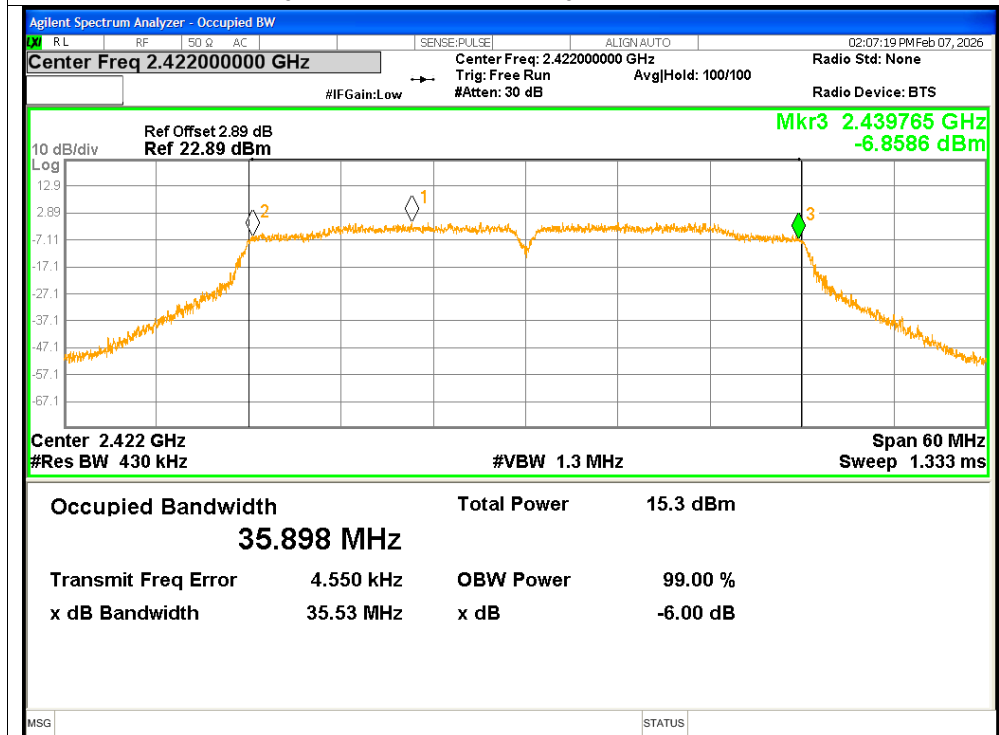

-6dB Bandwidth NVNT n40 2422MHz Ant2

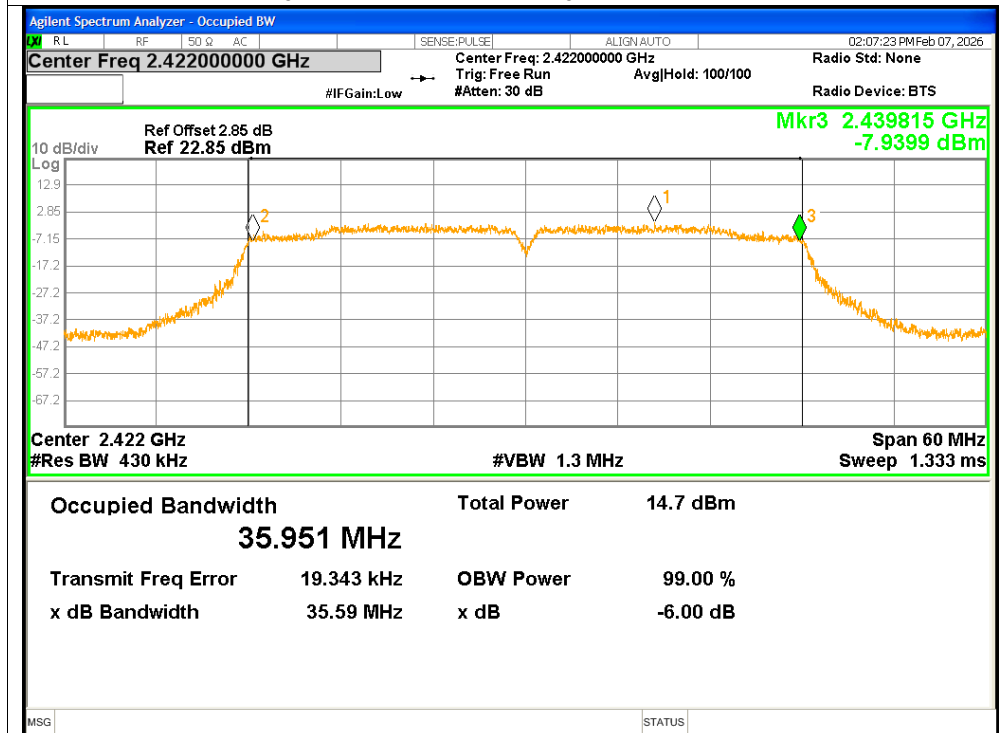


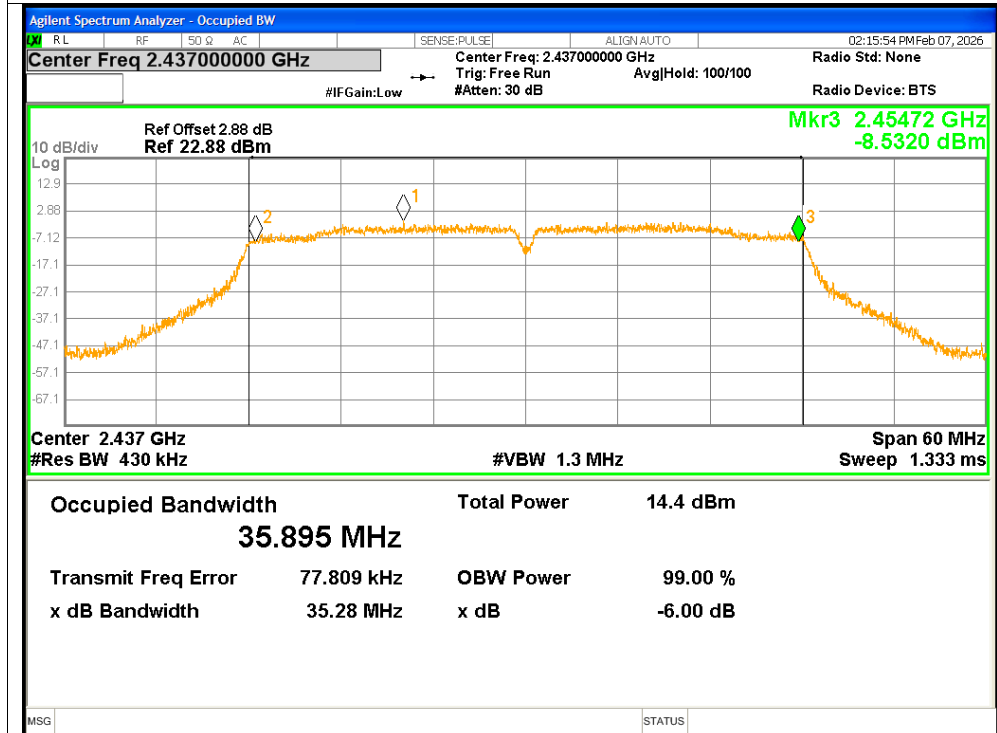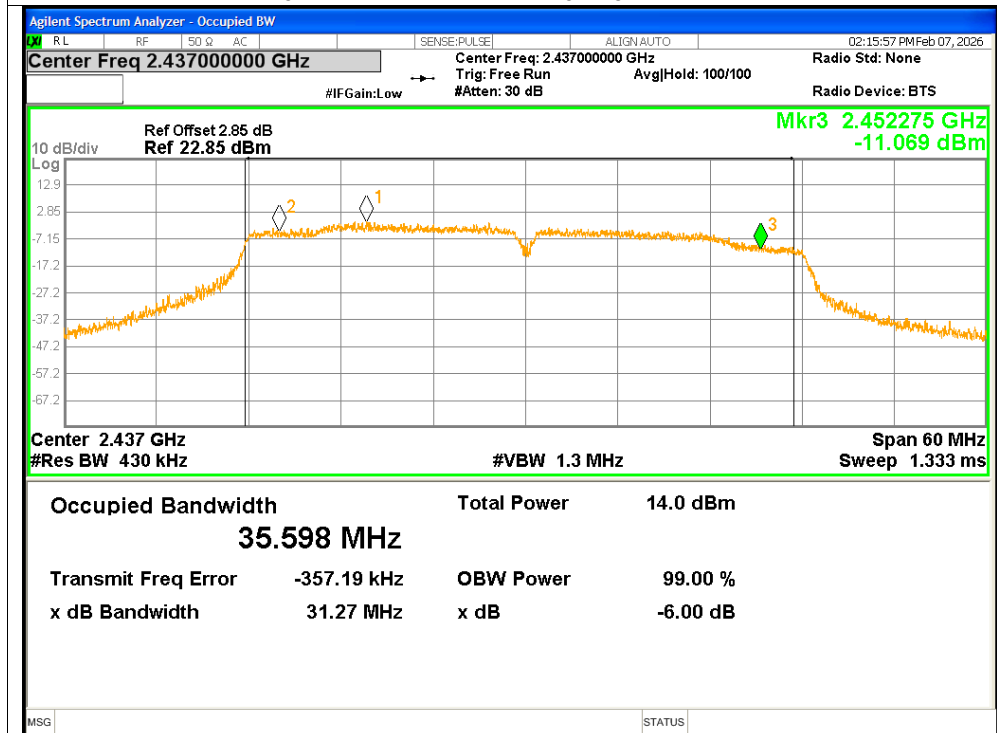**-6dB Bandwidth NVNT n40 2437MHz Ant1****-6dB Bandwidth NVNT n40 2437MHz Ant2**

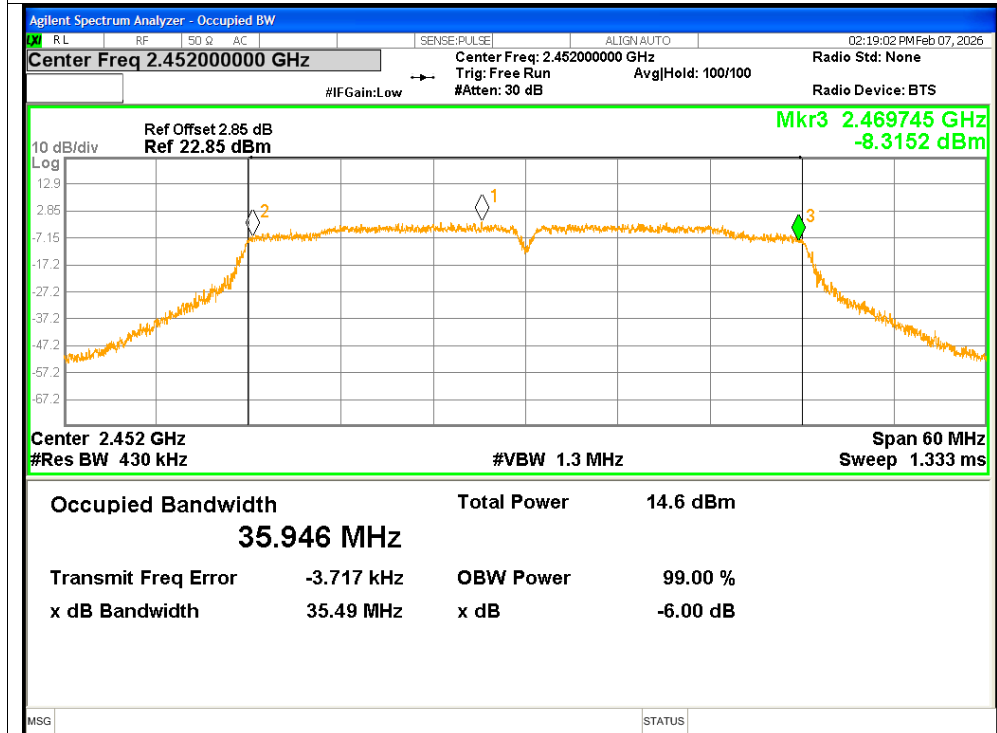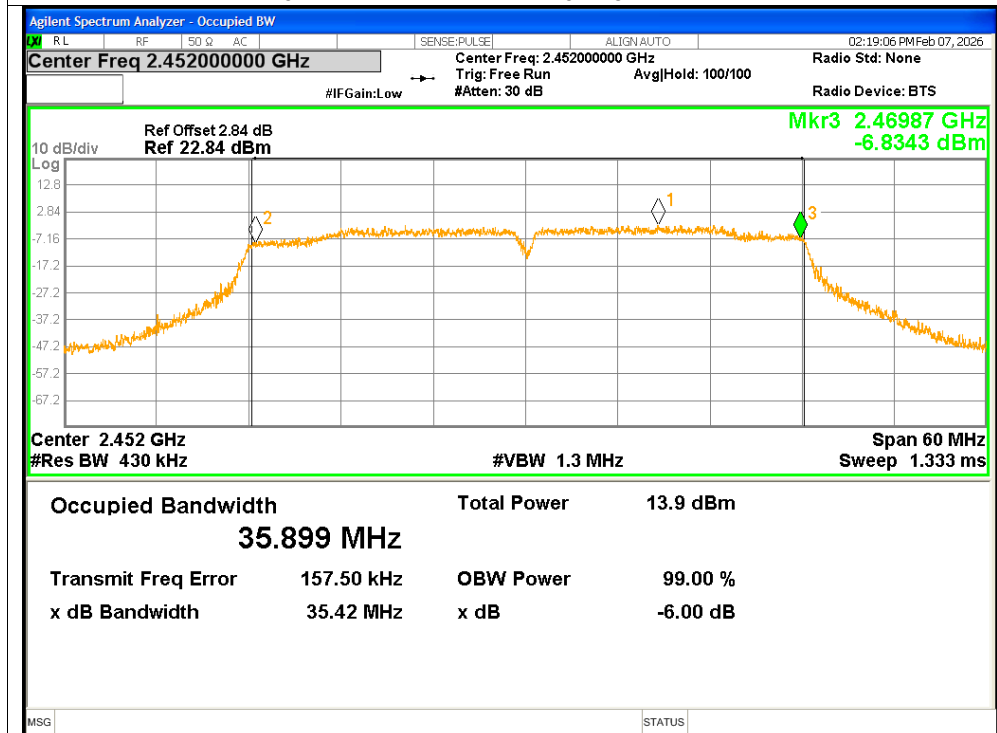
**-6dB Bandwidth NVNT n40 2452MHz Ant1****-6dB Bandwidth NVNT n40 2452MHz Ant2**



-6dB Bandwidth NVNT ax20 2412MHz Ant1

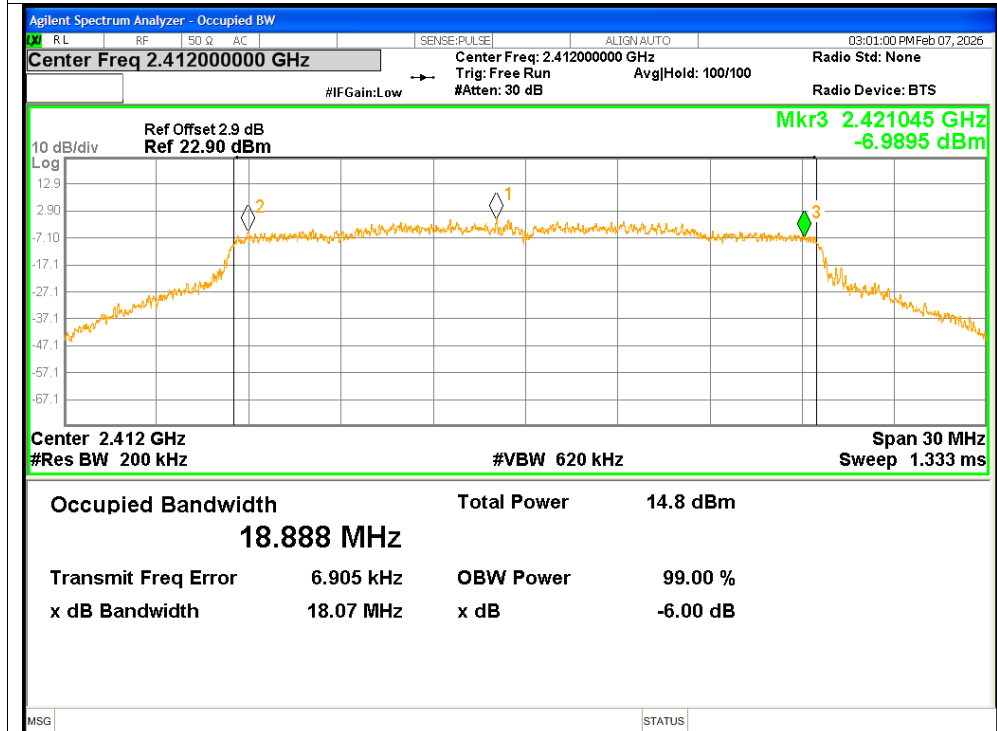


-6dB Bandwidth NVNT ax20 2412MHz Ant2

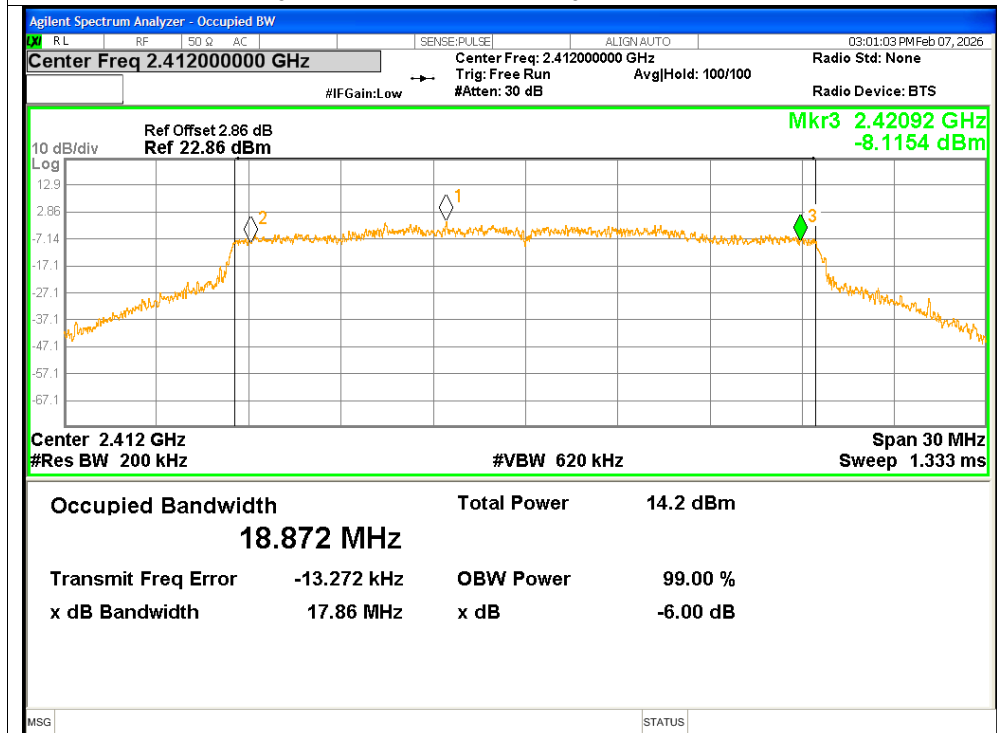




-6dB Bandwidth NVNT ax20 2437MHz Ant1

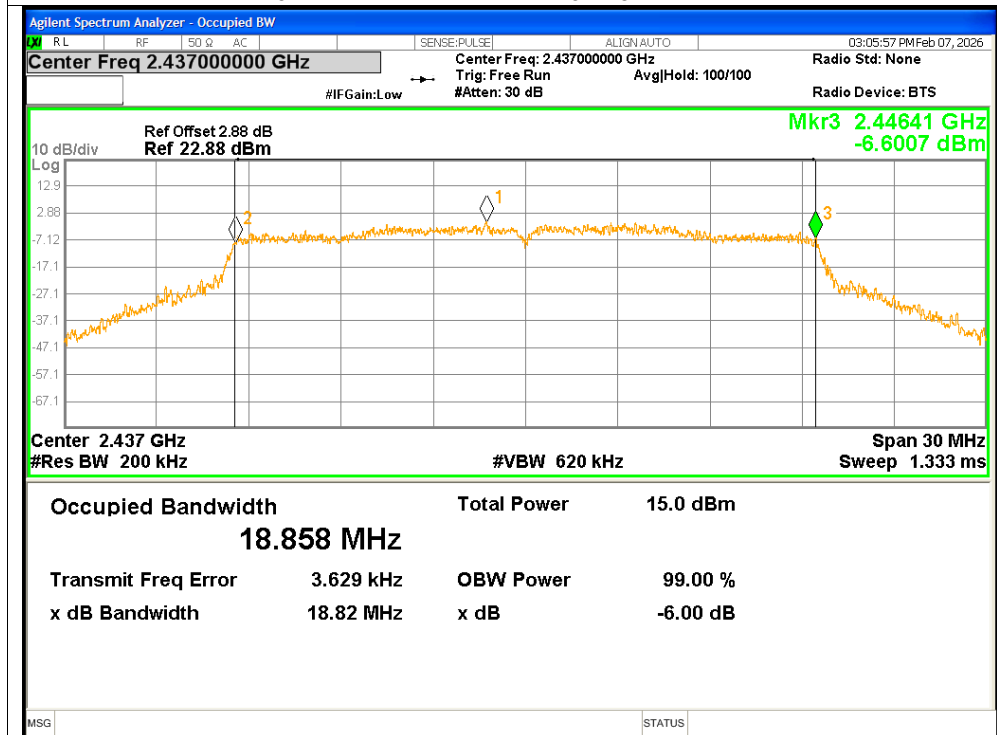


-6dB Bandwidth NVNT ax20 2437MHz Ant2

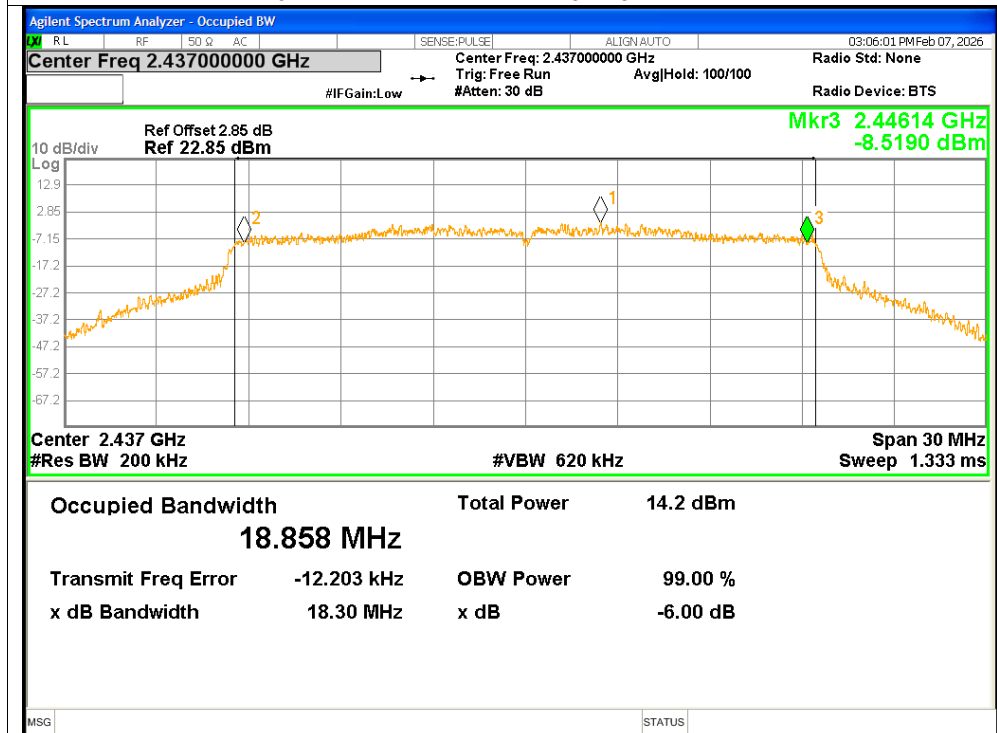




-6dB Bandwidth NVNT ax20 2462MHz Ant1

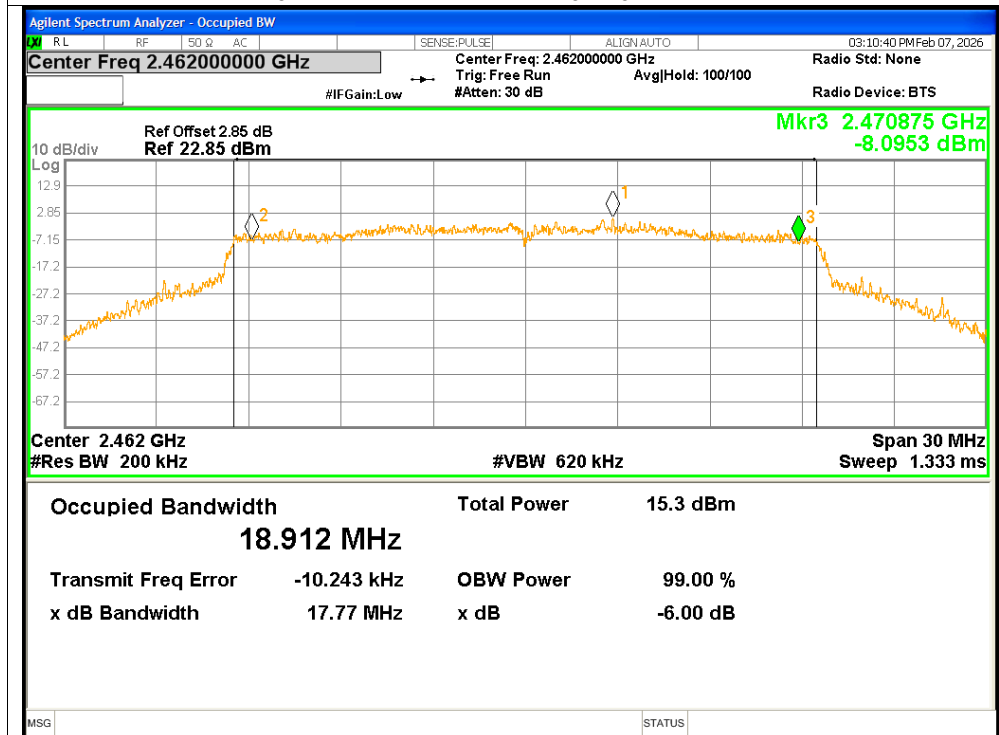


-6dB Bandwidth NVNT ax20 2462MHz Ant2

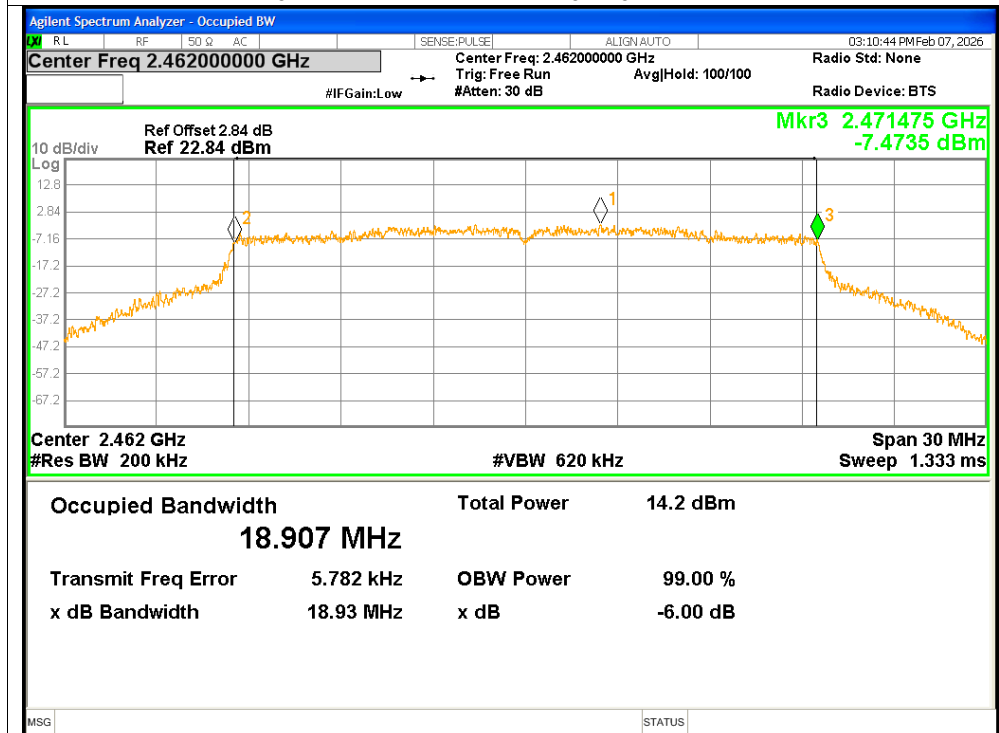




-6dB Bandwidth NVNT ax40 2422MHz Ant1

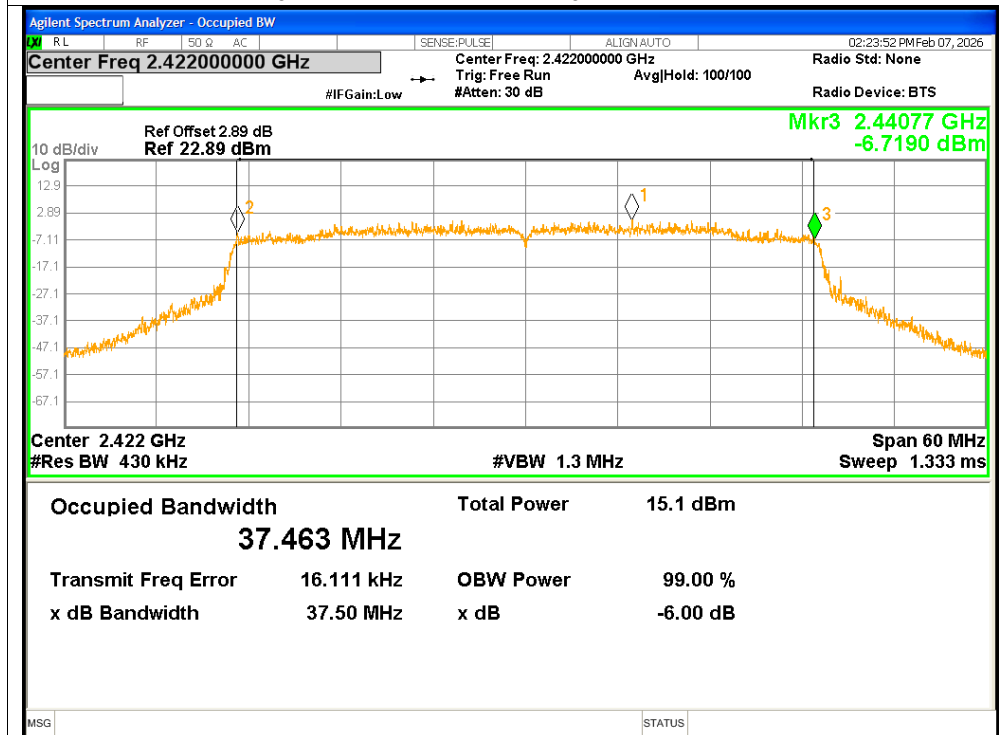


-6dB Bandwidth NVNT ax40 2422MHz Ant2

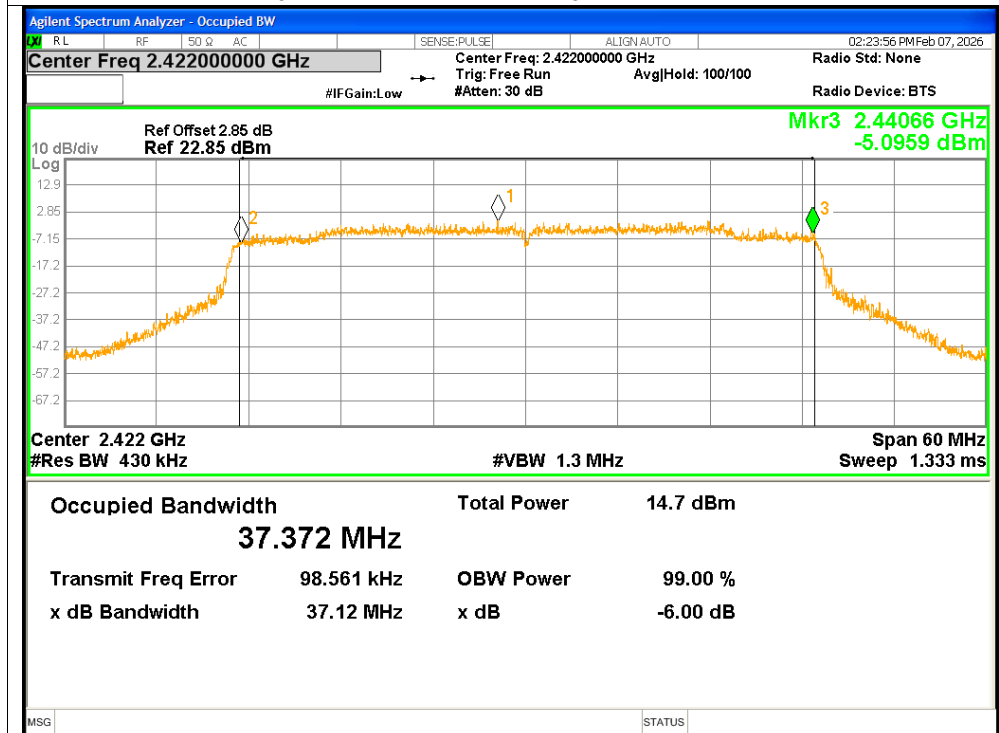




-6dB Bandwidth NVNT ax40 2437MHz Ant1

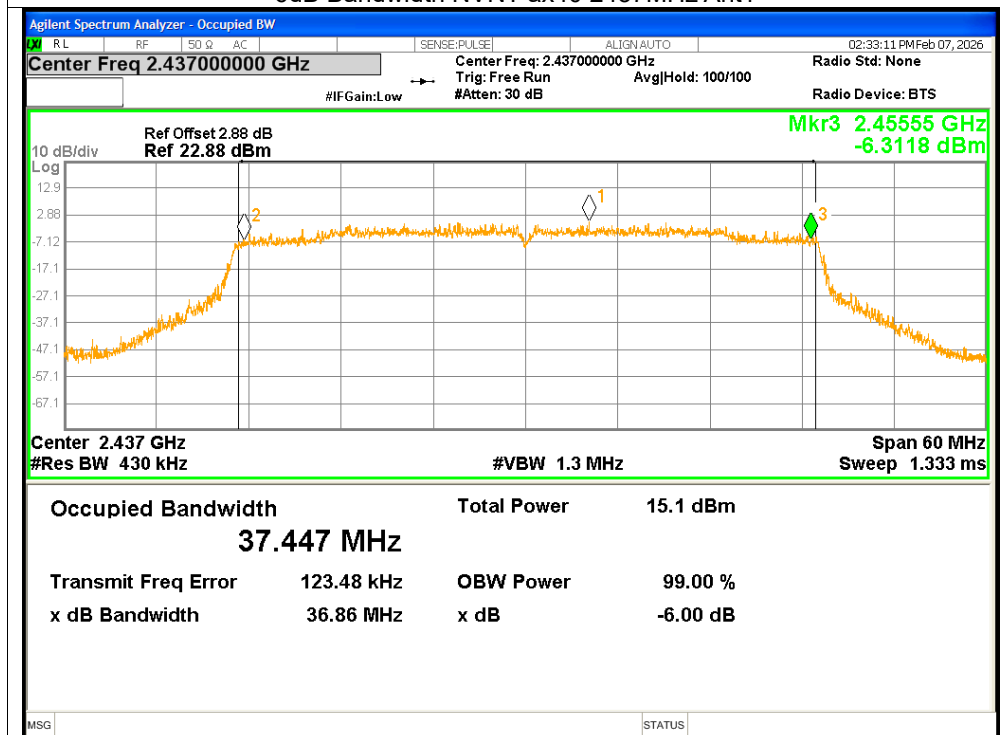


-6dB Bandwidth NVNT ax40 2437MHz Ant2

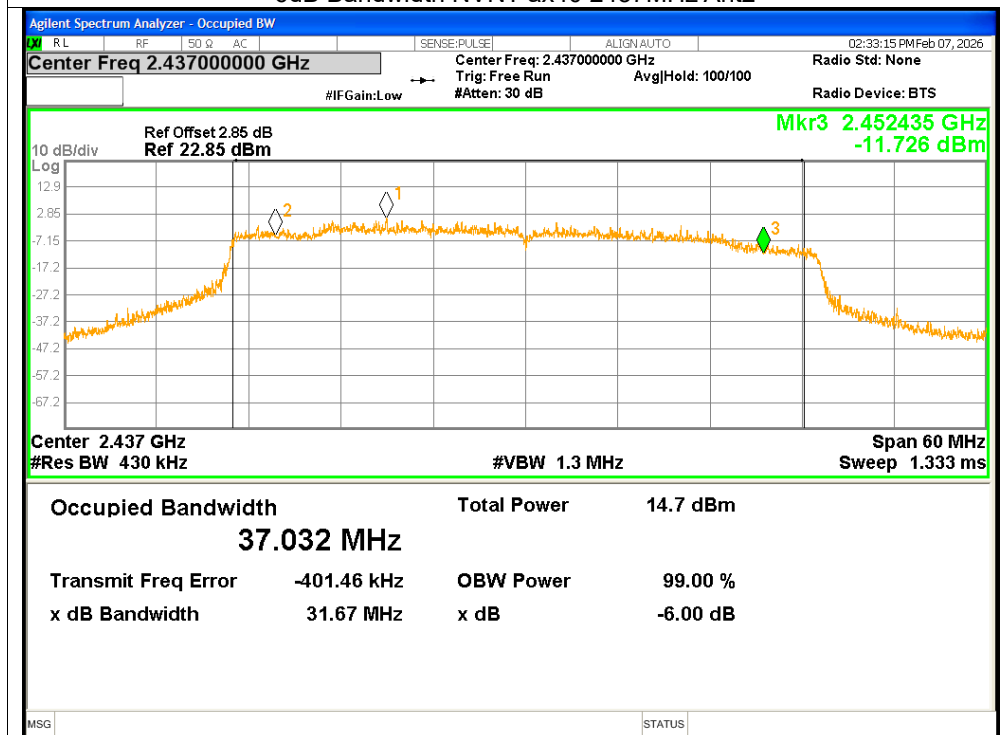




-6dB Bandwidth NVNT ax40 2452MHz Ant1

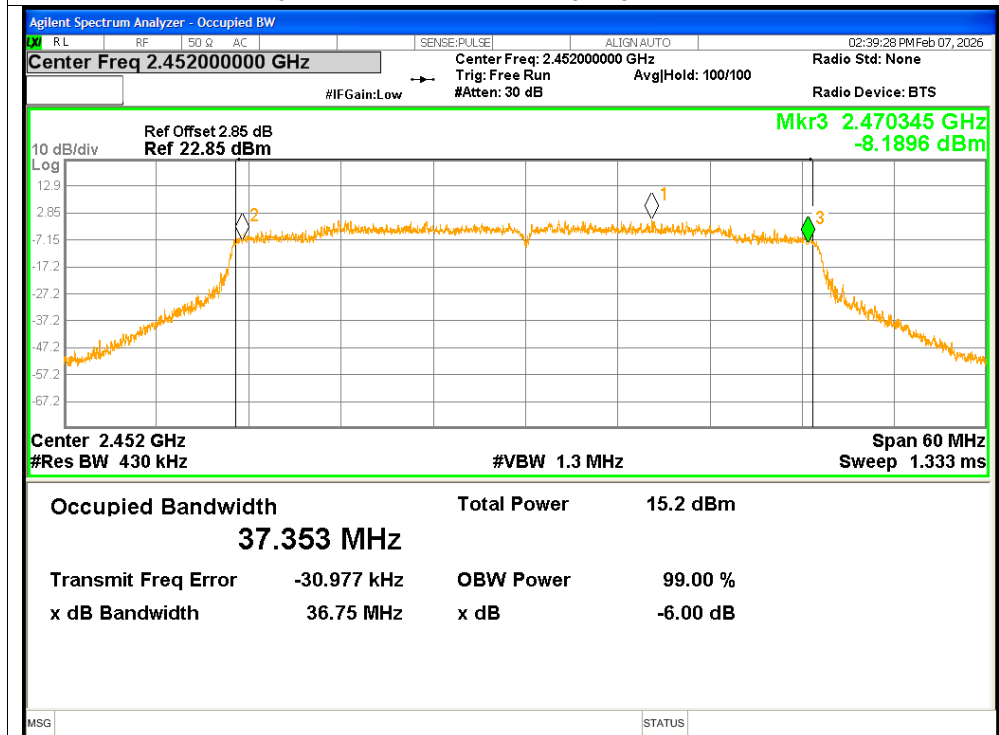


-6dB Bandwidth NVNT ax40 2452MHz Ant2

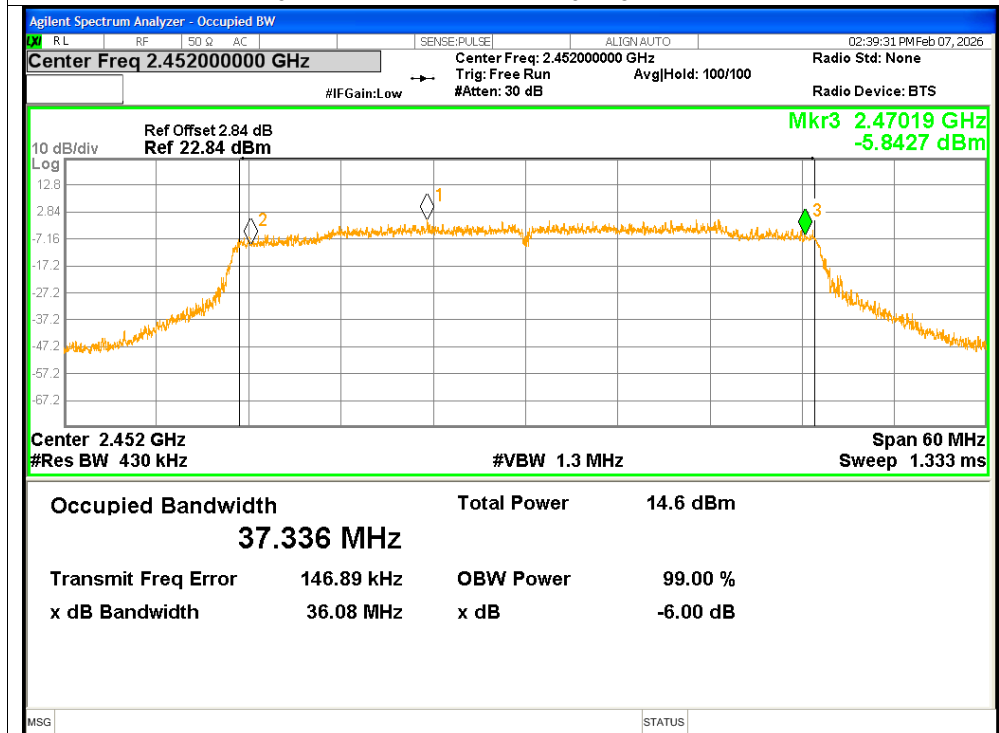




-6dB Bandwidth NVNT be20 2412MHz Ant1

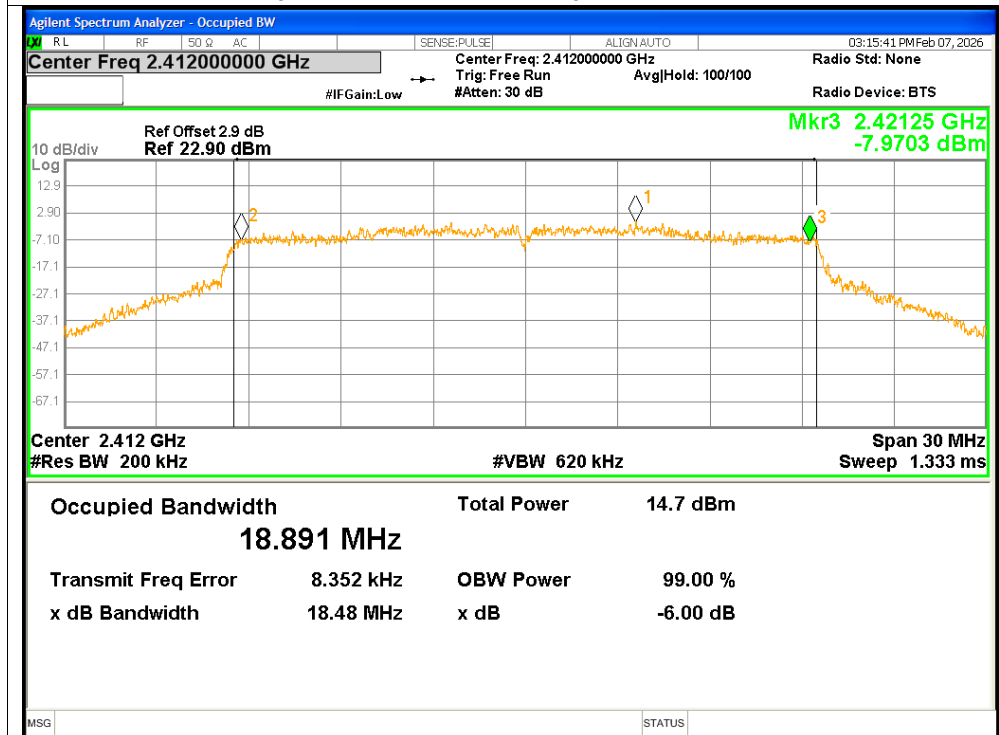


-6dB Bandwidth NVNT be20 2412MHz Ant2

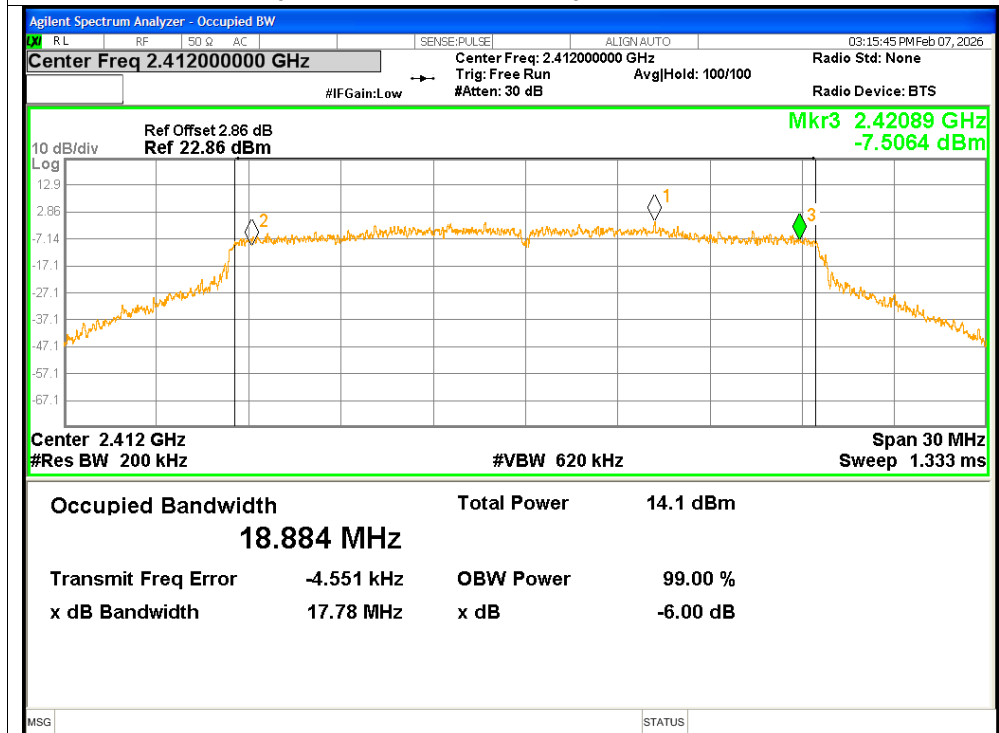




-6dB Bandwidth NVNT be20 2437MHz Ant1

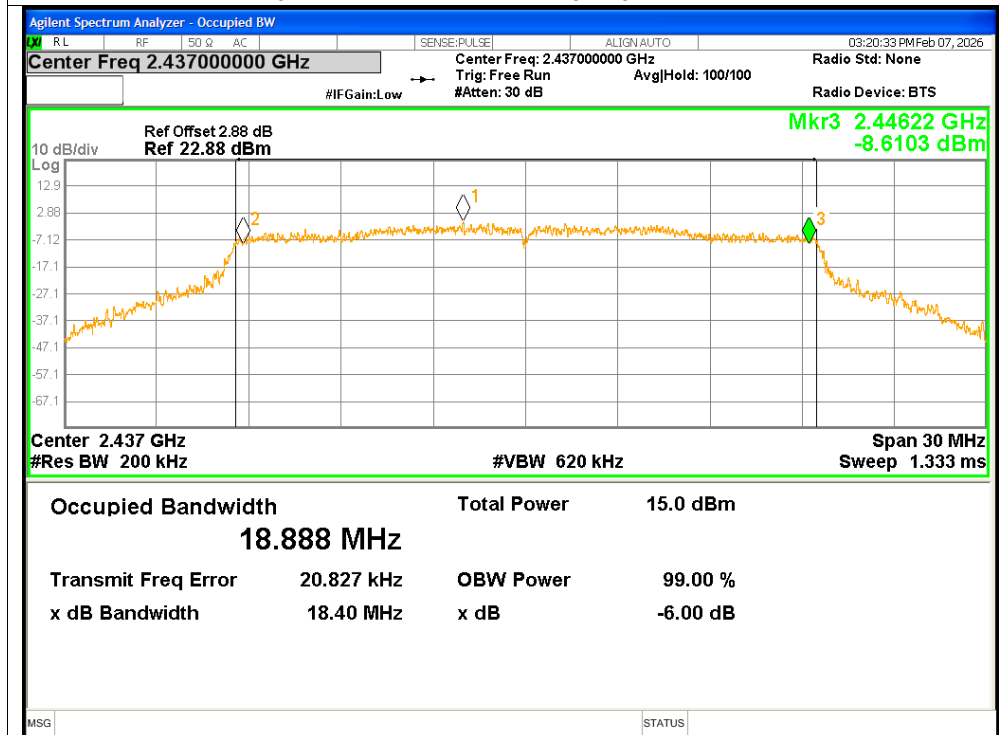


-6dB Bandwidth NVNT be20 2437MHz Ant2

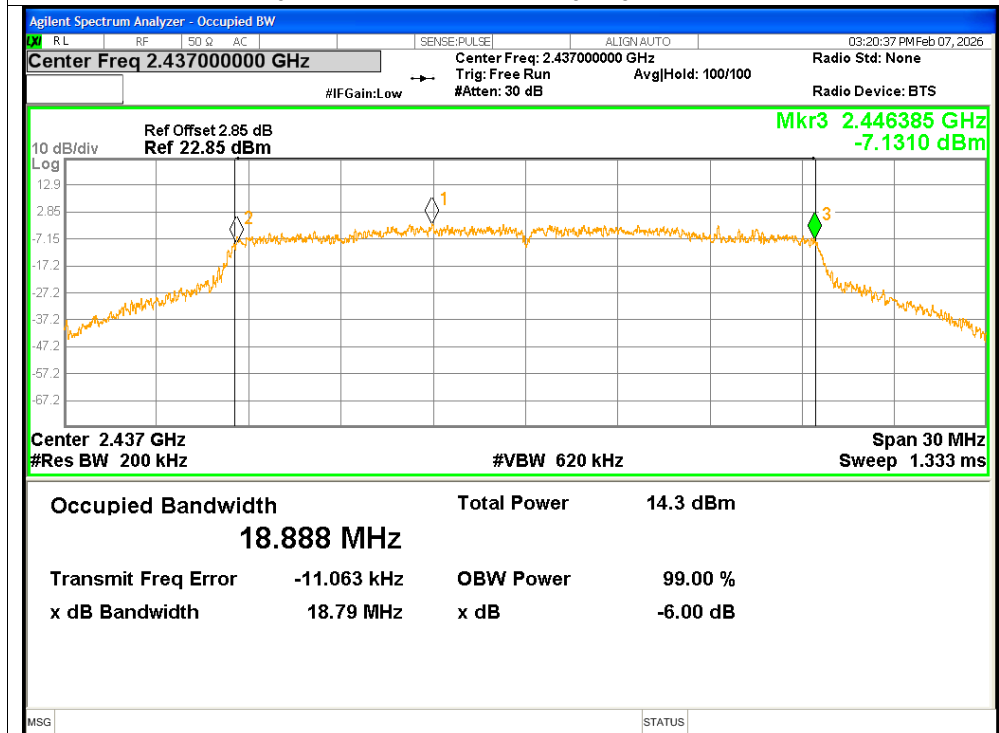




-6dB Bandwidth NVNT be20 2462MHz Ant1

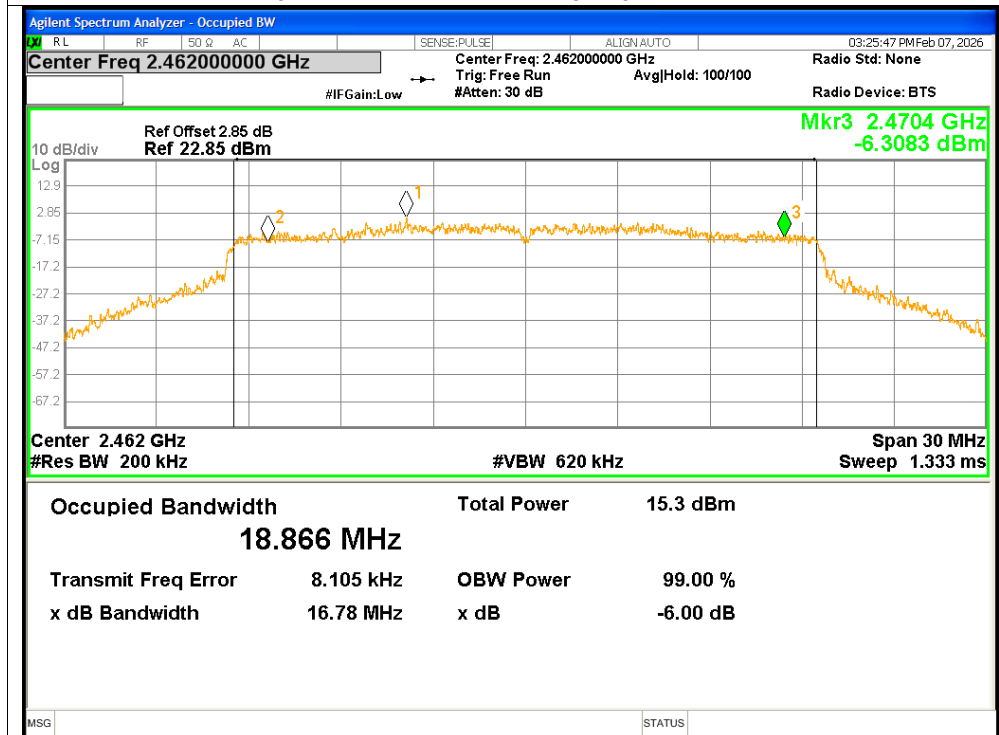


-6dB Bandwidth NVNT be20 2462MHz Ant2

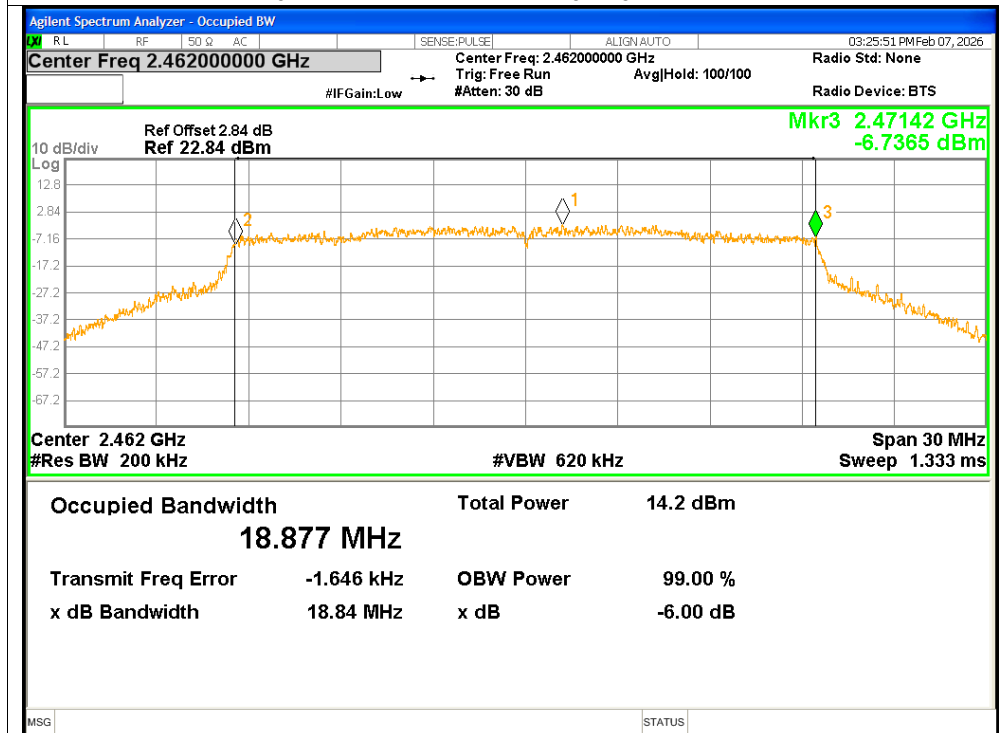




-6dB Bandwidth NVNT be40 2422MHz Ant1

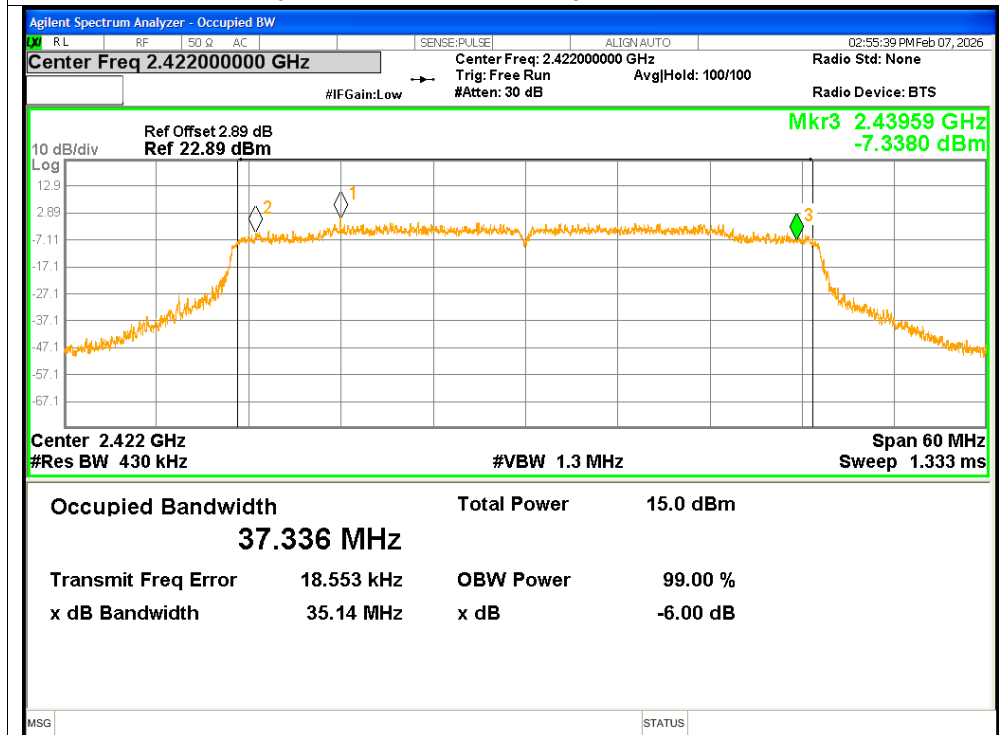


-6dB Bandwidth NVNT be40 2422MHz Ant2

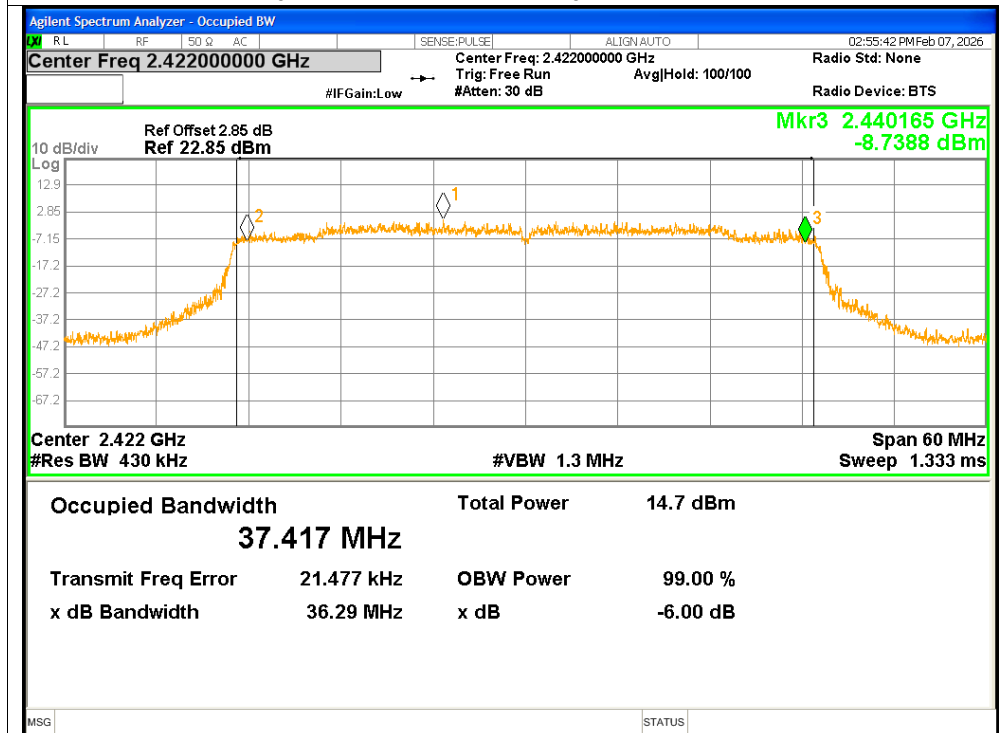




-6dB Bandwidth NVNT be40 2437MHz Ant1

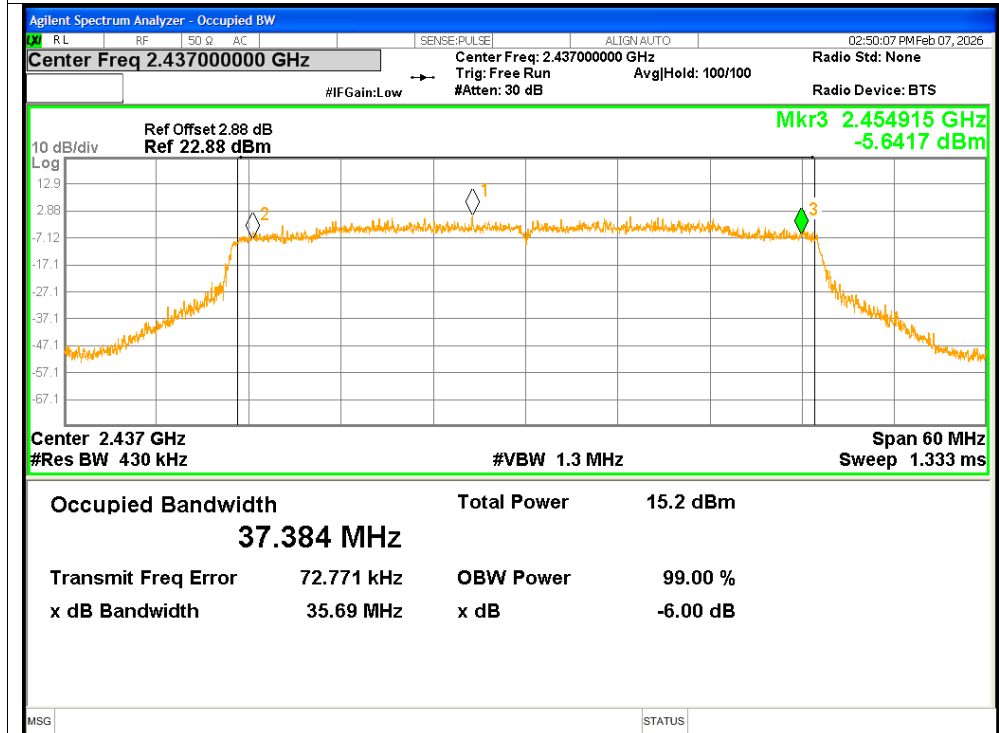


-6dB Bandwidth NVNT be40 2437MHz Ant2

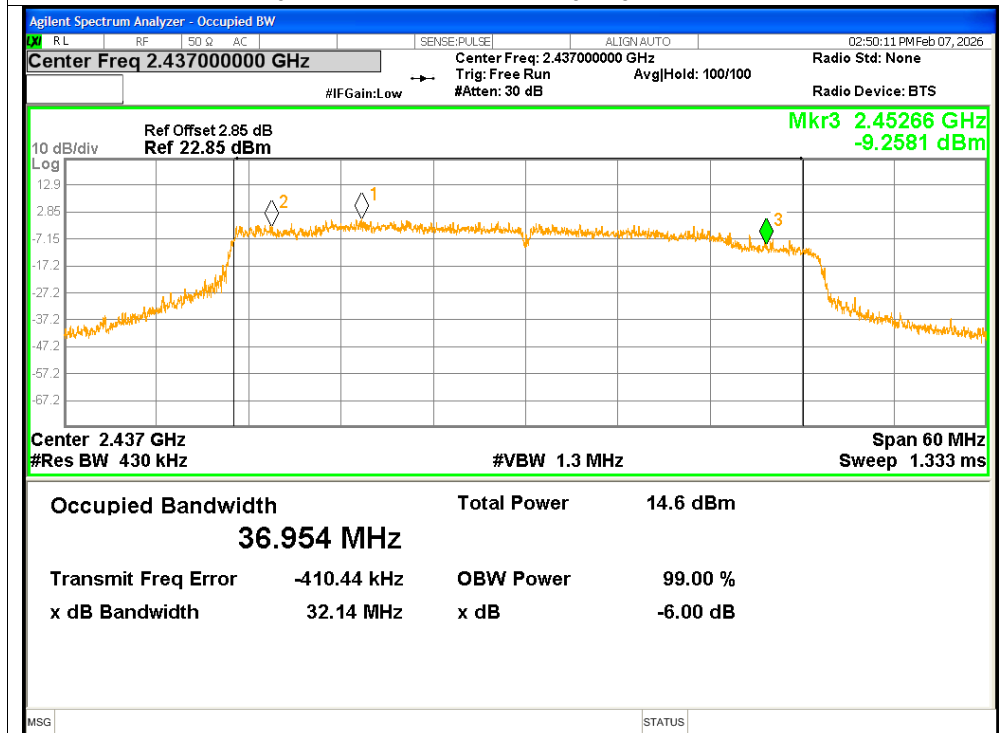




-6dB Bandwidth NVNT be40 2452MHz Ant1

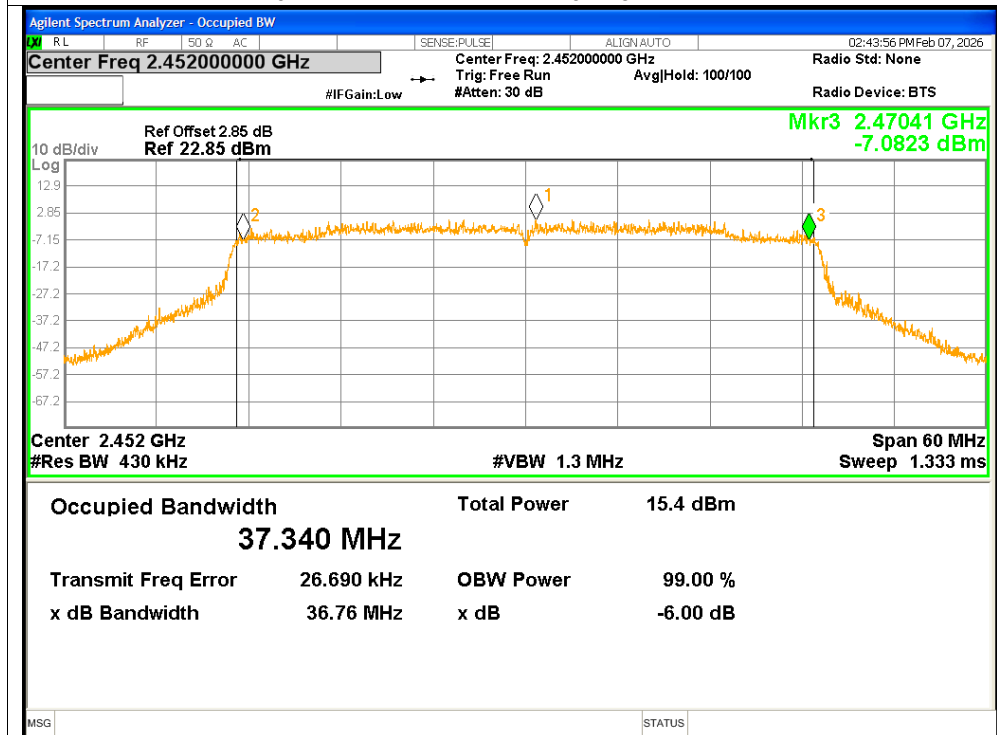

-6dB Bandwidth NVNT be40 2452MHz Ant2

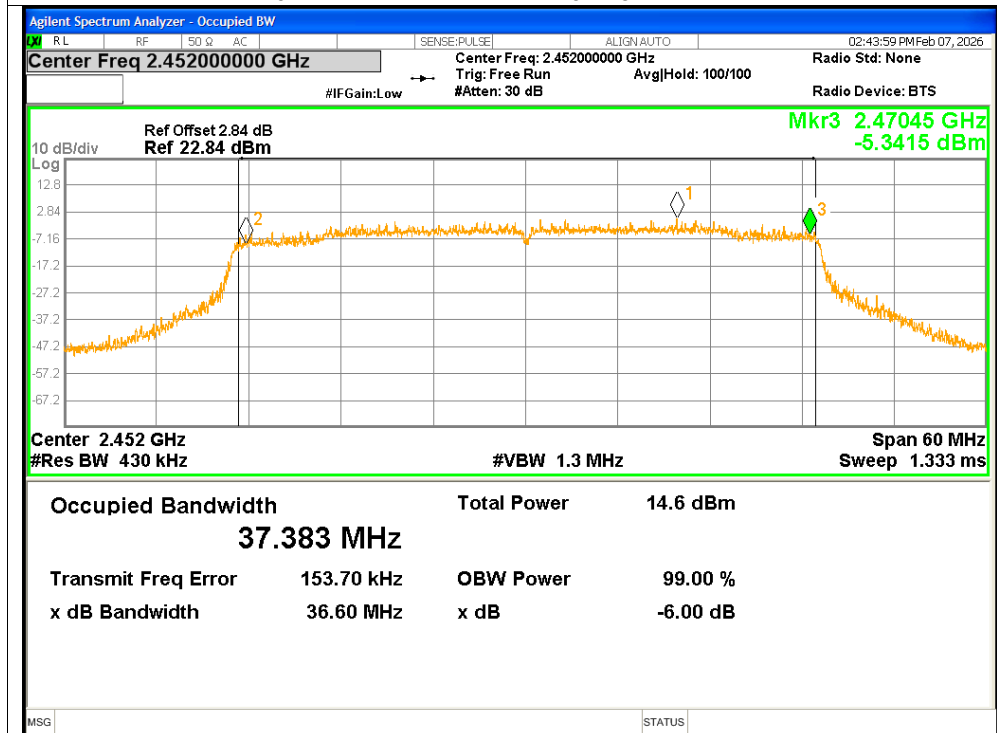



Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	13.34
NVNT	b	2437	Ant1	13.366
NVNT	b	2462	Ant1	13.309
NVNT	b	2412	Ant2	13.329
NVNT	b	2437	Ant2	13.394
NVNT	b	2462	Ant2	13.355
NVNT	g	2412	Ant1	16.609
NVNT	g	2437	Ant1	16.569
NVNT	g	2462	Ant1	16.559
NVNT	g	2412	Ant2	16.497
NVNT	g	2437	Ant2	16.563
NVNT	g	2462	Ant2	16.59
NVNT	n20	2412	Ant1	17.759
NVNT	n20	2412	Ant2	17.709
NVNT	n20	2437	Ant1	17.711
NVNT	n20	2437	Ant2	17.674
NVNT	n20	2462	Ant1	17.703
NVNT	n20	2462	Ant2	17.738
NVNT	n40	2422	Ant1	35.963
NVNT	n40	2422	Ant2	35.942
NVNT	n40	2437	Ant1	35.879
NVNT	n40	2437	Ant2	35.612
NVNT	n40	2452	Ant1	35.905
NVNT	n40	2452	Ant2	35.888
NVNT	ax20	2412	Ant1	18.911
NVNT	ax20	2412	Ant2	18.862
NVNT	ax20	2437	Ant1	18.842
NVNT	ax20	2437	Ant2	18.867
NVNT	ax20	2462	Ant1	18.874
NVNT	ax20	2462	Ant2	18.877
NVNT	ax40	2422	Ant1	37.454
NVNT	ax40	2422	Ant2	37.386
NVNT	ax40	2437	Ant1	37.455
NVNT	ax40	2437	Ant2	37.054
NVNT	ax40	2452	Ant1	37.39
NVNT	ax40	2452	Ant2	37.355
NVNT	be20	2412	Ant1	18.884
NVNT	be20	2412	Ant2	18.834
NVNT	be20	2437	Ant1	18.881
NVNT	be20	2437	Ant2	18.89
NVNT	be20	2462	Ant1	18.903
NVNT	be20	2462	Ant2	18.896
NVNT	be40	2422	Ant1	37.33
NVNT	be40	2422	Ant2	37.502
NVNT	be40	2437	Ant1	37.355
NVNT	be40	2437	Ant2	37.159
NVNT	be40	2452	Ant1	37.367
NVNT	be40	2452	Ant2	37.412