



TEST REPORT

Product Name: Mini PC
FCC ID: 2BOPX-MH01
Trademark: AWOW
Model Number: MH01, HA7, HA8, HA5
Prepared For: Aiwotai Technology (Shenzhen) Co., Ltd.
Address: A602-603, Jinfulai Building, Dabao Road, Xin'an Street, Baoan District
Guangdong Shenzhen
Manufacturer: Aiwotai Technology (Shenzhen) Co., Ltd.
Address: A602-603, Jinfulai Building, Dabao Road, Xin'an Street, Baoan District
Guangdong Shenzhen
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District,
Shenzhen, Guangdong, China
Sample Received Date: Sep. 05, 2025
Sample tested Date: Sep. 05, 2025 to Sep. 09, 2025
Issue Date: Sep. 09, 2025
Report No.: CTB25090510602RF03
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2020
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.
Compiled by: Reviewed by: Approved by:

Zhou kui

Arron Liu

Bin Mei

Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration.....	6
4.3 Support Equipment.....	6
4.4 Channel List	7
4.5 Test Mode	7
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup.....	12
6.2 Limit.....	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup.....	16
7.2 Limit.....	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS.....	50
8.1 Block Diagram Of Test Setup.....	50
8.2 Limit.....	50
8.3 Test procedure	50
8.4 Test Result	51
9. CONDUCTED OUTPUT POWER.....	75
9.1 Block Diagram Of Test Setup.....	75
9.2 Limit.....	75
9.3 Test procedure	75
9.4 Test Result	76
10. 6DB OCCUPIED BANDWIDTH.....	77
10.1 Block Diagram Of Test Setup.....	77
10.2 Limit.....	77
10.3 Test procedure	77
10.4 Test Result	78
11. POWER SPECTRAL DENSITY.....	92
11.1 Block Diagram Of Test Setup.....	92
11.2 Limit.....	92
11.3 Test procedure	92
11.4 Test Result	93
12. ANTENNA REQUIREMENT	106
13. EUT TEST SETUP PHOTOGRAPHS.....	107

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB25090510602RF03	Sep. 09, 2025	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2020	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2020	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2020	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2020	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2020	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2020/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2020.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density, Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9kHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(1GHz-40GHz)	$U=\pm 4.8\text{dB}$
Humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$
Conducted Emission (9kHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	MH01, HA7, HA8, HA5
Model Description:	All the model are the same circuit and RF module, only the model name are different. Test sample model: MH01
Wi-Fi Specification:	IEEE 802.11b/g/n/ax
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi (2.4G): IEEE 802.11b/g/n/ax20: 2412-2462MHz/ 11 channel IEEE 802.11n/ax40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 15.715dBm
Type of Modulation:	WiFi (2.4G): DSSS, OFDM, OFDMA
Antenna installation:	WiFi (2.4G): FPC antenna
Antenna Gain:	WiFi (2.4G): Ant1: 2.47dBi Ant2: 2.47dBi
Ratings:	For Adapter: Input: 100-240V~50/60Hz 1.5A Output: 19.0V=3.42A 64.98W

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	AC/DC ADAPTER	Jihongda	JHD-AP066E-1903 42BA-A	N/A	AE
2	Keyboard	DELL	KB216t	N/A	AE
3	Mouse	DELL	MS116c	N/A	AE
4	Monitor	DELL	SE2218HV	N/A	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	/	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n/ax20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n/ax40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n/ax20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n/ax40)	2422MHz	2437MHz	2452MHz

NOTE: Duty cycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11n20	65M
802.11n40	65M
802.11/ax20	65M
802.11/ax40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated Date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/5/23	2026/5/22
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/5/23	2026/5/22
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/5/23	2026/5/22
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/5/23	2026/5/22
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/5/22	2026/5/21
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/5/22	2026/5/21
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/5/22	2026/5/21
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	/	2025/6/18	2026/6/17
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	/	2025/6/18	2026/6/17
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	/	2025/5/24	2026/5/23
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2024/10/31	2025/10/30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/5/22	2026/5/21
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/	/
16	966 chamber	C.R.T.	966	/	/	2024/6/23	2027/6/22

17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/5/23	2026/5/22
18	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/2	2026/6/1
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/1	2026/5/31
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/2	2026/6/1
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/2	2026/6/1
27	Power Meter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/2	2026/6/1

Continuous disturbance							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2024/6/22	2027/6/21
2	LISN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/5/22	2026/5/21
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/5/22	2026/5/21
4	Coaxial cable	ZDECL	Z302S	18091904	/	2025/5/22	2026/5/21
5	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/18	2026/6/17
6	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2024/10/26	2025/10/25
7	EZ-EMC	Frad	EMC-con3A1.1	/	/	/	/
8	Current Probe	FCC	F-52B	199453	/	2025/5/24	2026/5/23
9	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
10	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22


Radiated emission(No.1 Chamber)							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2024/6/23	2027/6/22
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/6/1	2026/5/31

3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/3	2026/6/2
5	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/5/23	2026/5/22
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
9	Coaxial cable	ETS	RFC-SNS-100-NMS-80	/	/	2025/5/24	2026/5/23
10	Coaxial cable	ETS	RFC-SN-100-NMS-20	/	/	2025/5/24	2026/5/23
11	Coaxial cable	ETS	RFC-SNS-100-SMS-20	/	/	2025/5/24	2026/5/23
12	Coaxial cable	ETS	RFC-NNS-100-NMS-300	/	/	2025/5/24	2026/5/23
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

Radiated emission(No.2 Chamber)							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2024/6/8	2027/6/7
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/6/1	2026/5/31
3	Broadband Antenna	Schwarzbeck	VULB 9168	1471	/	2024/10/26	2025/10/25
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/3	2026/6/2
5	Preamplifier	Schwarzbeck	BBV 9743 B	00500	/	2025/5/30	2026/5/29
6	EMI TEST RECEIVER	R&S	ESCI7	100861	/	2024/10/26	2025/10/25
7	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
8	EMI test software	Farad	EZ-EMC	/	Ver. FARAD-3A1+	/	/
9	Coaxial cable	Rosenberg	8m	/	/	2024/10/26	2025/10/25
10	Coaxial cable	Times	2m	/	/	2024/10/26	2025/10/25
11	Coaxial cable	Times	2m	/	/	2024/10/26	2025/10/25
12	Coaxial cable	Times	1m	/	/	2024/10/26	2025/10/25
13	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

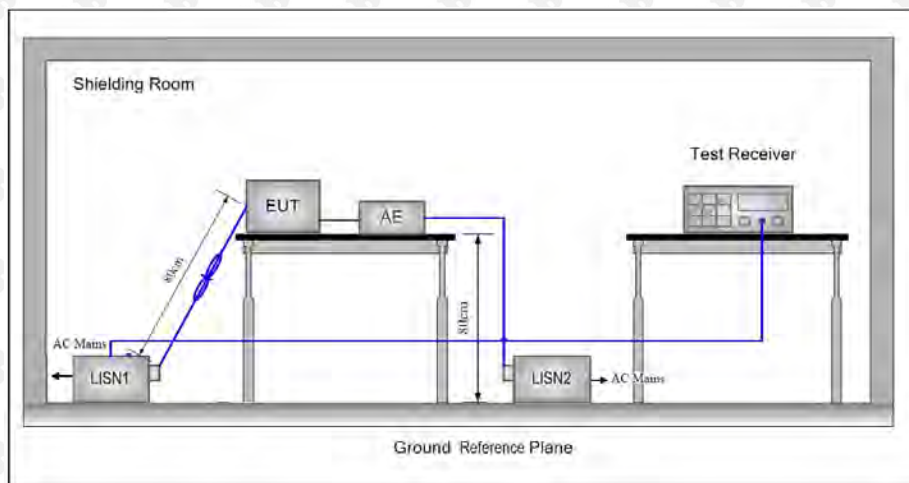

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

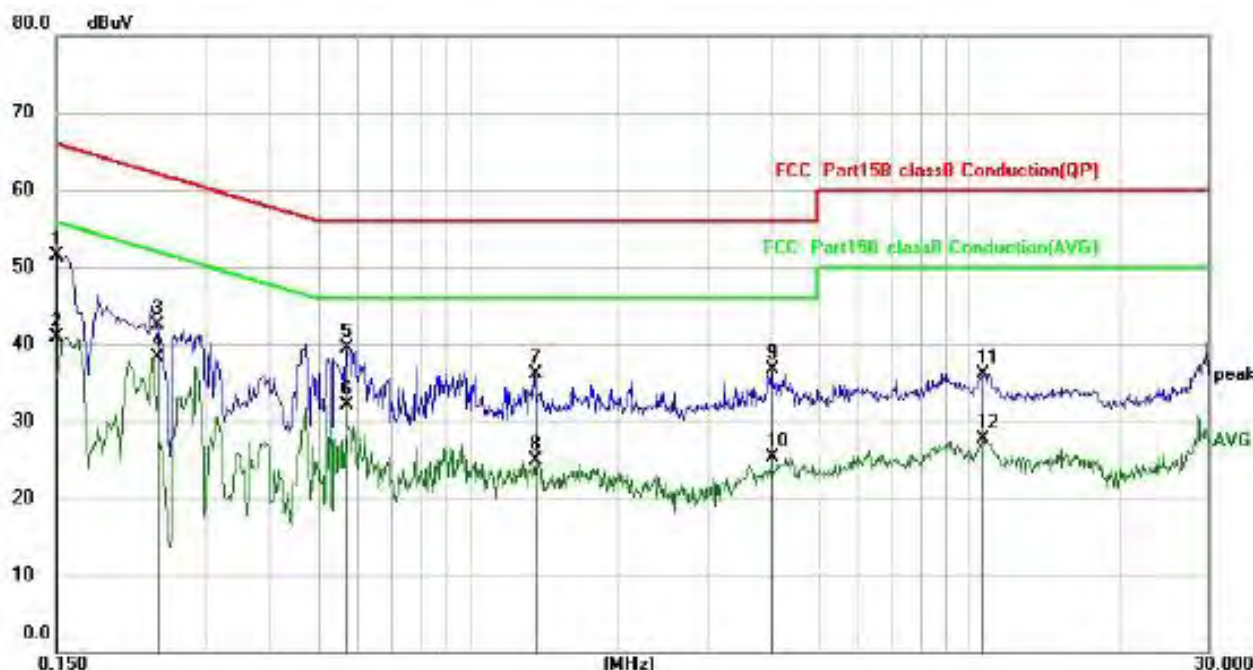

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	41.41	10.17	51.58	66.00	-14.42	QP
2		0.1500	30.81	10.17	40.98	56.00	-15.02	AVG
3		0.2379	32.31	10.18	42.49	62.17	-19.68	QP
4	*	0.2379	28.06	10.18	38.24	52.17	-13.93	AVG
5		0.5700	29.34	10.21	39.55	56.00	-16.45	QP
6		0.5700	21.81	10.21	32.02	46.00	-13.98	AVG
7		1.3580	25.74	10.38	36.12	56.00	-19.88	QP
8		1.3580	14.55	10.38	24.93	46.00	-21.07	AVG
9		4.0419	25.52	11.28	36.80	56.00	-19.20	QP
10		4.0419	13.99	11.28	25.27	46.00	-20.73	AVG
11		10.6737	21.91	14.29	36.20	60.00	-23.80	QP
12		10.6737	13.48	14.29	27.77	50.00	-22.23	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

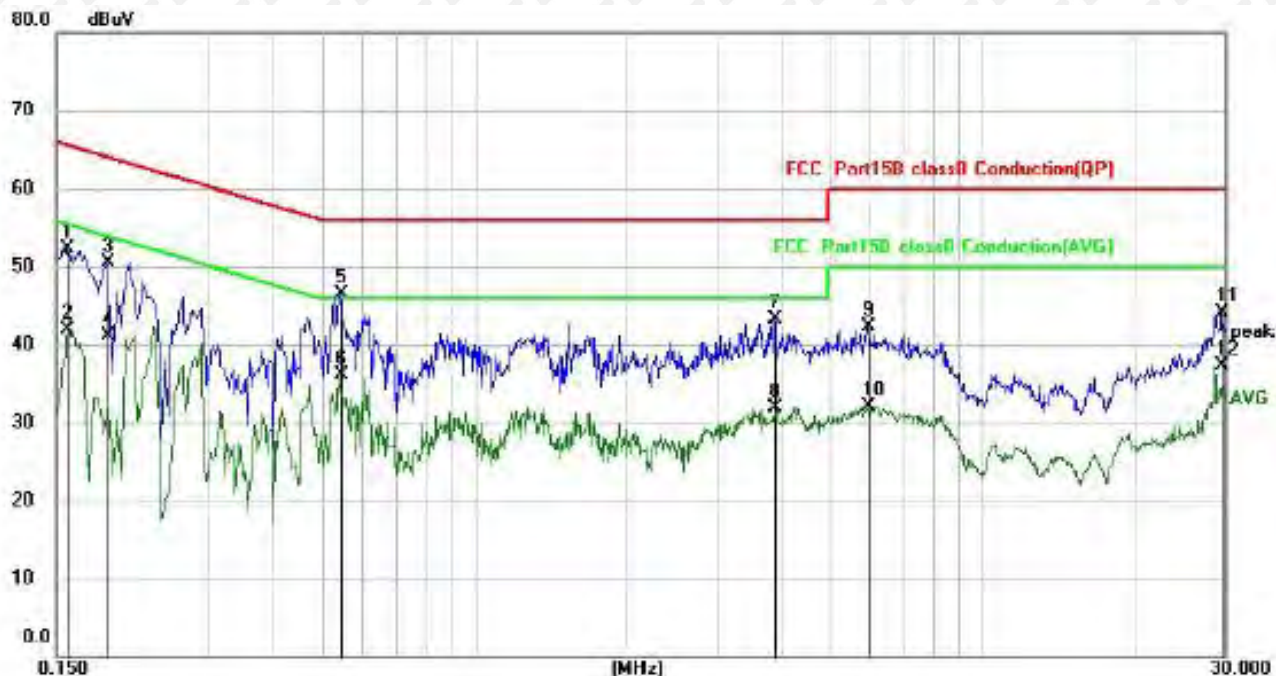

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1580	42.09	10.17	52.26	65.57	-13.31	QP
2		0.1580	31.66	10.17	41.83	55.57	-13.74	AVG
3		0.1900	40.40	10.18	50.58	64.04	-13.46	QP
4		0.1900	30.94	10.18	41.12	54.04	-12.92	AVG
5	*	0.5460	36.24	10.21	46.45	56.00	-9.55	QP
6		0.5460	25.85	10.21	36.06	46.00	-9.94	AVG
7		3.8940	32.06	11.22	43.28	56.00	-12.72	QP
8		3.8940	20.64	11.22	31.86	46.00	-14.14	AVG
9		5.9500	30.24	12.07	42.31	60.00	-17.69	QP
10		5.9500	20.03	12.07	32.10	50.00	-17.90	AVG
11		29.5336	21.29	22.87	44.16	60.00	-15.84	QP
12		29.5336	14.51	22.87	37.38	50.00	-12.62	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

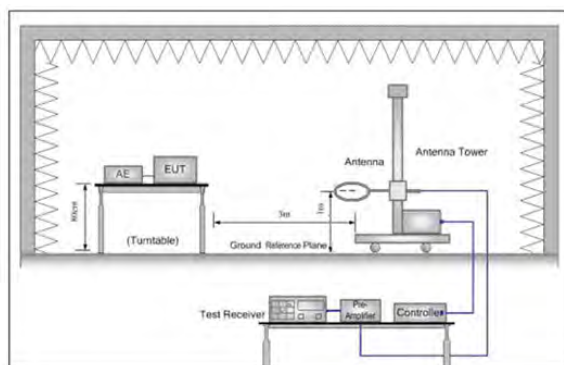


Figure 1. Below 30MHz

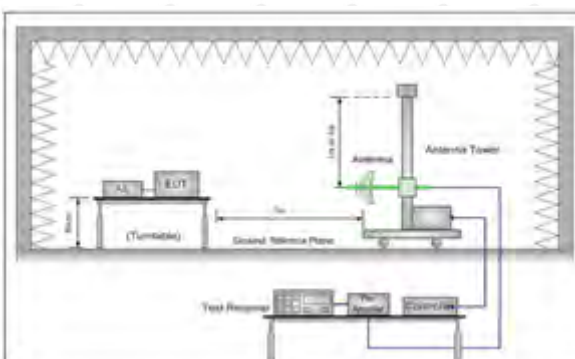


Figure 2. 30MHz to 1GHz

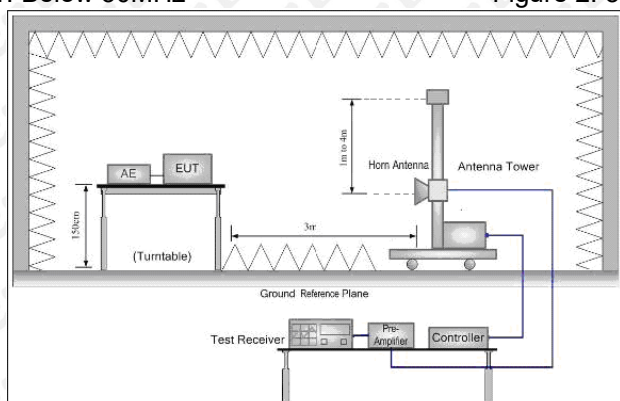


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.


Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H

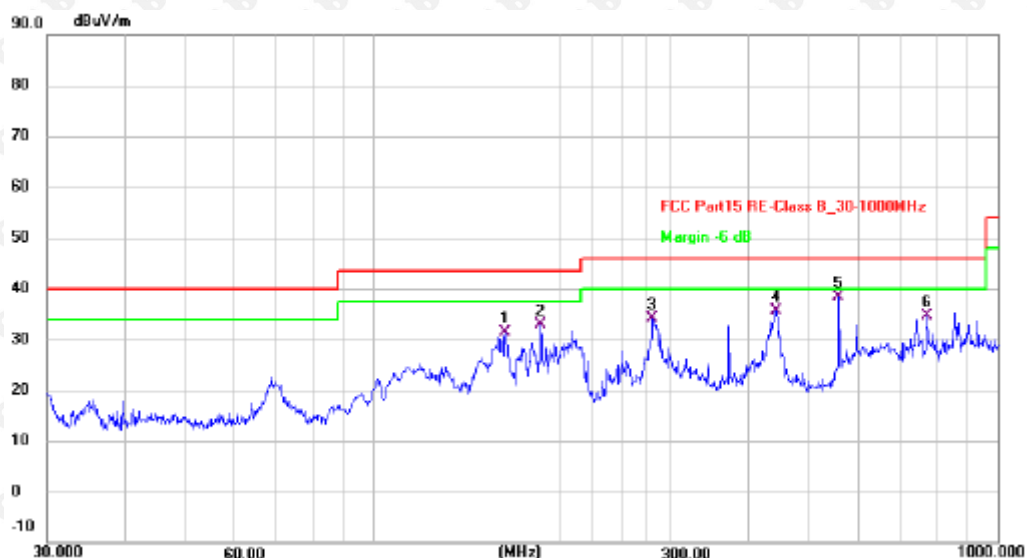

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	162.6105	44.71	-13.45	31.26	43.50	-12.24	QP
2	185.1378	48.46	-15.61	32.85	43.50	-10.65	QP
3	280.0237	48.09	-13.94	34.15	46.00	-11.85	QP
4	441.7425	45.85	-10.23	35.62	46.00	-10.38	QP
5 *	556.7743	45.48	-7.12	38.36	46.00	-7.64	QP
6	771.4485	37.89	-3.23	34.66	46.00	-11.34	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

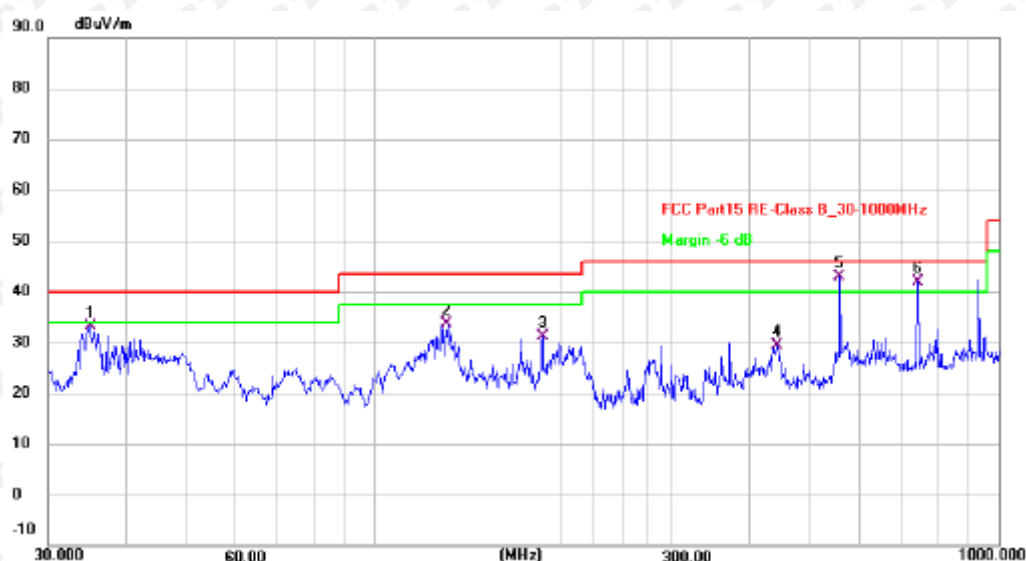

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.0048	47.04	-13.82	33.22	40.00	-6.78	QP
2	130.8369	48.33	-14.59	33.74	43.50	-9.76	QP
3	185.7882	46.78	-15.63	31.15	43.50	-12.35	QP
4	441.7426	39.70	-10.23	29.47	46.00	-16.53	QP
5 *	556.7744	49.98	-7.12	42.86	46.00	-3.14	QP
6 !	742.2587	45.53	-3.69	41.84	46.00	-4.16	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9k-30MHz measurement exceeds 20dB, so the test chart is not included.
2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT1 b-mode test chart is put.

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.82	-3.64	61.18	74	-12.82	peak
4824	51.03	-3.64	47.39	54	-6.61	AVG
7236	58.67	-0.95	57.72	74	-16.28	peak
7236	44.12	-0.95	43.17	54	-10.83	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.70	-3.64	61.06	74	-12.94	peak
4824	49.13	-3.64	45.49	54	-8.51	AVG
7236	59.02	-0.95	58.07	74	-15.93	peak
7236	45.49	-0.95	44.54	54	-9.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.20	-3.51	61.69	74	-12.31	peak
4874	50.64	-3.51	47.13	54	-6.87	AVG
7311	57.74	-0.82	56.92	74	-17.08	peak
7311	44.72	-0.82	43.90	54	-10.10	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.58	-3.51	62.07	74	-11.93	peak
4874	49.10	-3.51	45.59	54	-8.41	AVG
7311	57.79	-0.82	56.97	74	-17.03	peak
7311	42.34	-0.82	41.52	54	-12.48	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detection Type
4924	63.57	-3.43	60.14	74	-13.86	peak
4924	48.12	-3.43	44.69	54	-9.31	AVG
7386	58.19	-0.75	57.44	74	-16.56	peak
7386	43.34	-0.75	42.59	54	-11.41	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detection Type
4924	63.10	-3.43	59.67	74	-14.33	peak
4924	46.99	-3.43	43.56	54	-10.44	AVG
7386	57.16	-0.75	56.41	74	-17.59	peak
7386	43.56	-0.75	42.81	54	-11.19	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.11	-3.64	62.47	74	-11.53	peak
4824	50.01	-3.64	46.37	54	-7.63	AVG
7236	58.75	-0.95	57.80	74	-16.20	peak
7236	45.65	-0.95	44.70	54	-9.30	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.73	-3.64	62.09	74	-11.91	peak
4824	49.69	-3.64	46.05	54	-7.95	AVG
7236	58.40	-0.95	57.45	74	-16.55	peak
7236	44.22	-0.95	43.27	54	-10.73	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detecto Type
4874	63.41	-3.51	59.90	74	-14.10	peak
4874	49.09	-3.51	45.58	54	-8.42	AVG
7311	58.24	-0.82	57.42	74	-16.58	peak
7311	43.57	-0.82	42.75	54	-11.25	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detecto Type
4874	64.23	-3.51	60.72	74	-13.28	peak
4874	47.42	-3.51	43.91	54	-10.09	AVG
7311	58.95	-0.82	58.13	74	-15.87	peak
7311	44.16	-0.82	43.34	54	-10.66	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detection Type
4924	63.53	-3.43	60.10	74	-13.90	peak
4924	47.00	-3.43	43.57	54	-10.43	AVG
7386	59.17	-0.75	58.42	74	-15.58	peak
7386	42.48	-0.75	41.73	54	-12.27	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detection Type
4924	63.14	-3.43	59.71	74	-14.29	peak
4924	46.39	-3.43	42.96	54	-11.04	AVG
7386	58.11	-0.75	57.36	74	-16.64	peak
7386	41.57	-0.75	40.82	54	-13.18	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.83	-3.64	62.19	74	-11.81	peak
4824	48.32	-3.64	44.68	54	-9.32	AVG
7236	59.25	-0.95	58.30	74	-15.70	peak
7236	45.16	-0.95	44.21	54	-9.79	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	67.30	-3.64	63.66	74	-10.34	peak
4824	47.24	-3.64	43.60	54	-10.40	AVG
7236	57.82	-0.95	56.87	74	-17.13	peak
7236	45.39	-0.95	44.44	54	-9.56	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detecto Type
4874	65.61	-3.51	62.10	74	-11.90	peak
4874	49.81	-3.51	46.30	54	-7.70	AVG
7311	60.35	-0.82	59.53	74	-14.47	peak
7311	45.61	-0.82	44.79	54	-9.21	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detecto Type
4874	65.01	-3.51	61.50	74	-12.50	peak
4874	49.24	-3.51	45.73	54	-8.27	AVG
7311	58.87	-0.82	58.05	74	-15.95	peak
7311	44.39	-0.82	43.57	54	-10.43	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	ingFactor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detecto Type
4924	62.40	-3.43	58.97	74	-15.03	peak
4924	47.82	-3.43	44.39	54	-9.61	AVG
7386	57.77	-0.75	57.02	74	-16.98	peak
7386	42.44	-0.75	41.69	54	-12.31	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	ingFactor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detecto Type
4924	64.32	-3.43	60.89	74	-13.11	peak
4924	48.58	-3.43	45.15	54	-8.85	AVG
7386	57.77	-0.75	57.02	74	-16.98	peak
7386	42.26	-0.75	41.51	54	-12.49	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	64.22	-3.63	60.59	74	-13.41	peak
4844	46.90	-3.63	43.27	54	-10.73	AVG
7266	59.15	-0.94	58.21	74	-15.79	peak
7266	44.61	-0.94	43.67	54	-10.33	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	64.22	-3.63	60.59	74	-13.41	peak
4844	48.90	-3.63	45.27	54	-8.73	AVG
7266	58.38	-0.94	57.44	74	-16.56	peak
7266	44.73	-0.94	43.79	54	-10.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector T
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.73	-3.51	59.22	74	-14.78	peak
4874	48.37	-3.51	44.86	54	-9.14	AVG
7311	58.08	-0.82	57.26	74	-16.74	peak
7311	44.45	-0.82	43.63	54	-10.37	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector T
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.29	-3.51	58.78	74	-15.22	peak
4874	46.50	-3.51	42.99	54	-11.01	AVG
7311	56.64	-0.82	55.82	74	-18.18	peak
7311	43.37	-0.82	42.55	54	-11.45	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	ingFactor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	64.94	-3.43	61.51	74	-12.49	peak
4904	47.45	-3.43	44.02	54	-9.98	AVG
7356	56.66	-0.75	55.91	74	-18.09	peak
7356	43.49	-0.75	42.74	54	-11.26	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	ingFactor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	64.43	-3.43	61.00	74	-13.00	peak
4904	46.43	-3.43	43.00	54	-11.00	AVG
7356	57.16	-0.75	56.41	74	-17.59	peak
7356	43.85	-0.75	43.10	54	-10.90	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “--- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH1 (802.11ax/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	64.47	-3.64	60.83	74	-13.17	peak
4824	46.62	-3.64	42.98	54	-11.02	AVG
7236	57.51	-0.95	56.56	74	-17.44	peak
7236	43.05	-0.95	42.10	54	-11.90	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	62.64	-3.64	59.00	74	-15.00	peak
4824	50.28	-3.64	46.64	54	-7.36	AVG
7236	59.19	-0.95	58.24	74	-15.76	peak
7236	44.00	-0.95	43.05	54	-10.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT1+ANT2 MID CH6 (802.11ax/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detected Type
4874.00	63.86	-3.51	60.35	74.00	-13.65	peak
4874.00	49.87	-3.51	46.36	54.00	-7.64	AVG
7311.00	59.72	-0.82	58.90	74.00	-15.10	peak
7311.00	43.33	-0.82	42.51	54.00	-11.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detected Type
4874.00	64.29	-3.51	60.78	74.00	-13.22	peak
4874.00	48.18	-3.51	44.67	54.00	-9.33	AVG
7311.00	57.36	-0.82	56.54	74.00	-17.46	peak
7311.00	43.12	-0.82	42.30	54.00	-11.70	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission
Margin = Emission level - Limits

ANT1+ANT2 HIGH CH11 (802.11ax/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924	62.60	-3.43	59.17	74	-14.83	peak
4924	47.16	-3.43	43.73	54	-10.27	AVG
7386	57.25	-0.75	56.50	74	-17.50	peak
7386	43.12	-0.75	42.37	54	-11.63	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924	64.67	-3.43	61.24	74	-12.76	peak
4924	45.14	-3.43	41.71	54	-12.29	AVG
7386	58.72	-0.75	57.97	74	-16.03	peak
7386	42.41	-0.75	41.66	54	-12.34	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission
Margin = Emission level - Limits

ANT1+ANT2 LOW CH3 (802.11ax/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.63	-3.63	62.00	74	-12.00	peak
4844	47.17	-3.63	43.54	54	-10.46	AVG
7266	58.01	-0.94	57.07	74	-16.93	peak
7266	45.32	-0.94	44.38	54	-9.62	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.66	-3.63	61.03	74	-12.97	peak
4844	47.65	-3.63	44.02	54	-9.98	AVG
7266	58.27	-0.94	57.33	74	-16.67	peak
7266	45.49	-0.94	44.55	54	-9.45	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11ax/H40 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874	63.52	-3.51	60.01	74	-13.99	peak
4874	49.64	-3.51	46.13	54	-7.87	AVG
7311	59.41	-0.82	58.59	74	-15.41	peak
7311	46.53	-0.82	45.71	54	-8.29	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874	62.32	-3.51	58.81	74	-15.19	peak
4874	46.46	-3.51	42.95	54	-11.05	AVG
7311	56.66	-0.82	55.84	74	-18.16	peak
7311	43.31	-0.82	42.49	54	-11.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission
Margin = Emission level - Limits

ANT1+ANT2 HIGH CH9 (802.11ax/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4904	64.33	-3.43	60.90	74	-13.10	peak
4904	47.54	-3.43	44.11	54	-9.89	AVG
7356	57.57	-0.75	56.82	74	-17.18	peak
7356	43.38	-0.75	42.63	54	-11.37	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4904	63.66	-3.43	60.23	74	-13.77	peak
4904	45.72	-3.43	42.29	54	-11.71	AVG
7356	59.02	-0.75	58.27	74	-15.73	peak
7356	42.54	-0.75	41.79	54	-12.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission Margin = Emission level - Limits

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5)Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.28	-5.81	51.47	74	-22.53	peak
2390	/	-5.81	/	54	/	AVG
2399	63.85	-5.84	58.01	74	-15.99	peak
2399	48.33	-5.84	42.49	54	-11.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.41	-5.81	50.60	74	-23.40	peak
2390	/	-5.81	/	54	/	AVG
2399	62.32	-5.84	56.48	74	-17.52	peak
2399	46.45	-5.84	40.61	54	-13.39	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.58	-5.65	51.93	74	-22.07	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.42	-5.65	49.77	74	-24.23	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.21	-5.81	53.40	74	-20.60	peak
2390	/	-5.81	/	54	/	AVG
2399	62.46	-5.84	56.62	74	-17.38	peak
2399	47.35	-5.84	41.51	54	-12.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.41	-5.81	50.60	74	-23.40	peak
2390	/	-5.81	/	54	/	AVG
2399	62.75	-5.84	56.91	74	-17.09	peak
2399	45.53	-5.84	39.69	54	-14.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.34	-5.65	50.69	74	-23.31	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.47	-5.65	51.82	74	-22.18	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.54	-5.81	51.73	74	-22.27	peak
2390	/	-5.81	/	54	/	AVG
2399	62.91	-5.84	57.07	74	-16.93	peak
2399	47.93	-5.84	42.09	54	-11.91	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.30	-5.81	51.49	74	-22.51	peak
2390	/	-5.81	/	54	/	AVG
2399	61.69	-5.84	55.85	74	-18.15	peak
2399	47.75	-5.84	41.91	54	-12.09	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.86	-5.65	50.21	74	-23.79	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.60	-5.65	49.95	74	-24.05	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.68	-5.81	52.87	74	-21.13	peak
2390	/	-5.81	/	54	/	AVG
2399	62.99	-5.84	57.15	74	-16.85	peak
2399	46.51	-5.84	40.67	54	-13.33	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.33	-5.81	52.52	74	-21.48	peak
2390	/	-5.81	/	54	/	AVG
2399	61.71	-5.84	55.87	74	-18.13	peak
2399	45.44	-5.84	39.60	54	-14.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.93	-5.65	52.28	74	-21.72	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.68	-5.65	50.03	74	-23.97	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11ax/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.66	-5.81	50.85	74	-23.15	peak
2390	/	-5.81	/	54	/	AVG
2399	63.57	-5.84	57.73	74	-16.27	peak
2399	48.42	-5.84	42.58	54	-11.42	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.39	-5.81	51.58	74	-22.42	peak
2390	/	-5.81	/	54	/	AVG
2399	61.34	-5.84	55.50	74	-18.50	peak
2399	47.96	-5.84	42.12	54	-11.88	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11ax/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.50	-5.65	50.85	74	-23.15	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.47	-5.65	50.82	74	-23.18	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11ax/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.48	-5.81	52.67	74	-21.33	peak
2390	/	-5.81	/	54	/	AVG
2399	62.86	-5.84	57.02	74	-16.98	peak
2399	46.62	-5.84	40.78	54	-13.22	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.81	-5.81	52.00	74	-22.00	peak
2390	/	-5.81	/	54	/	AVG
2399	62.14	-5.84	56.30	74	-17.70	peak
2399	45.97	-5.84	40.13	54	-13.87	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11ax/H40 Mode TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.58	-5.65	50.93	74	-23.07	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.11	-5.65	52.46	74	-21.54	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

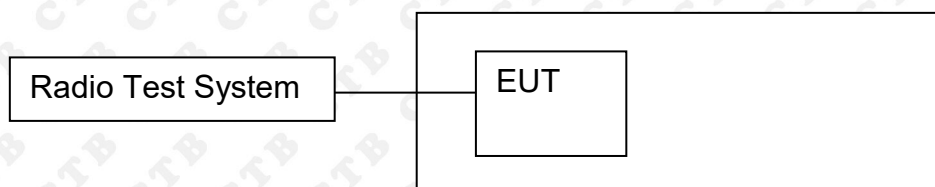

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold


Above 30MHz:

RBW = 100kHz, VBW = 300KHz, Sweep = auto

Detector function = peak, Trace = max hold


8.4 Test Result

ANT1:

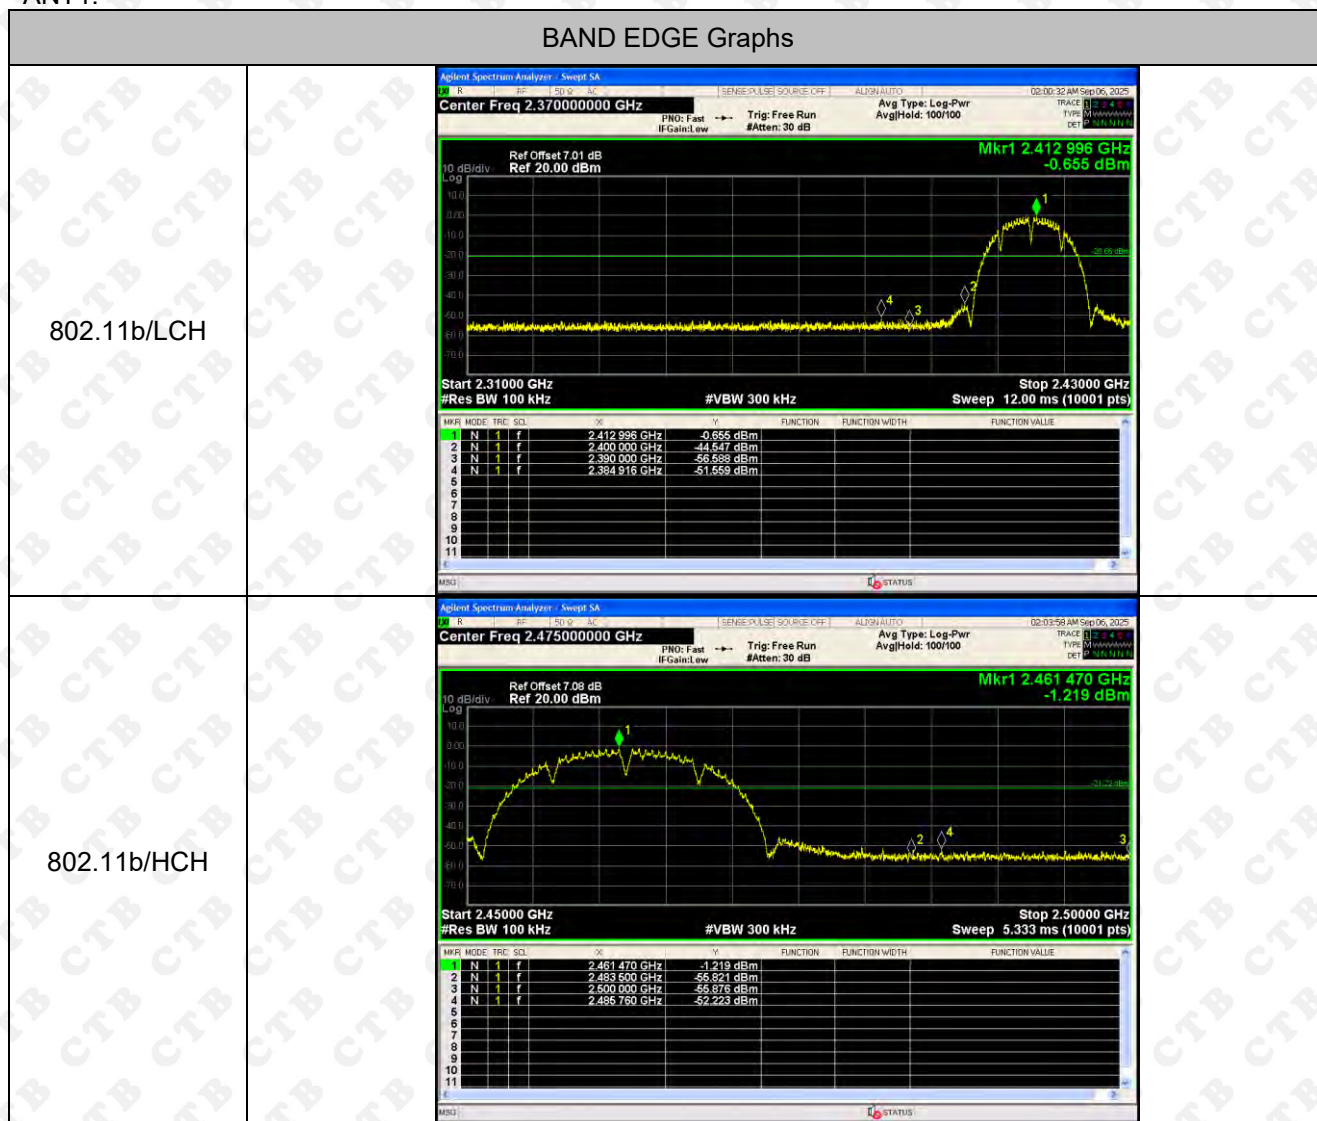


BAND EDGE Graphs

802.11g/LCH

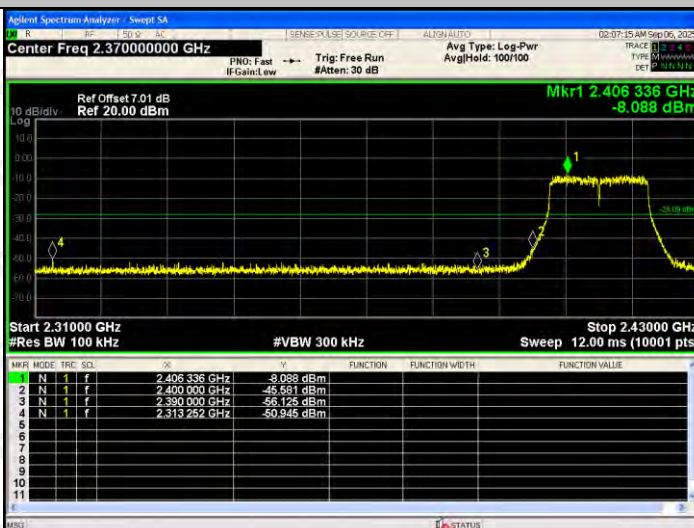


802.11g/HCH

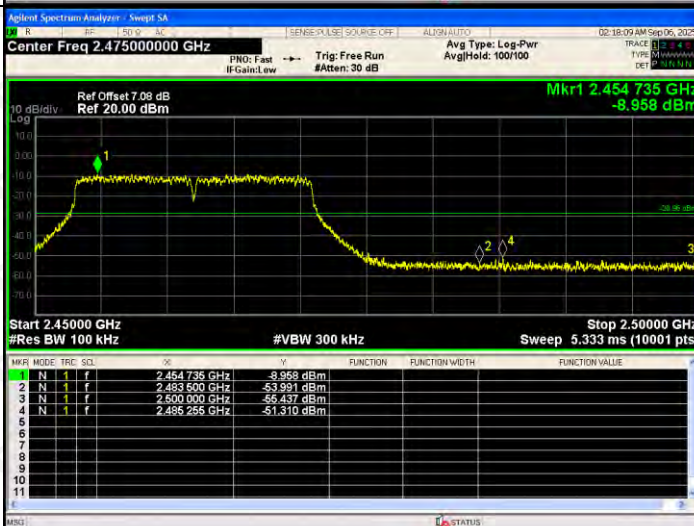


BAND EDGE Graphs

802.11n(HT20)/LCH

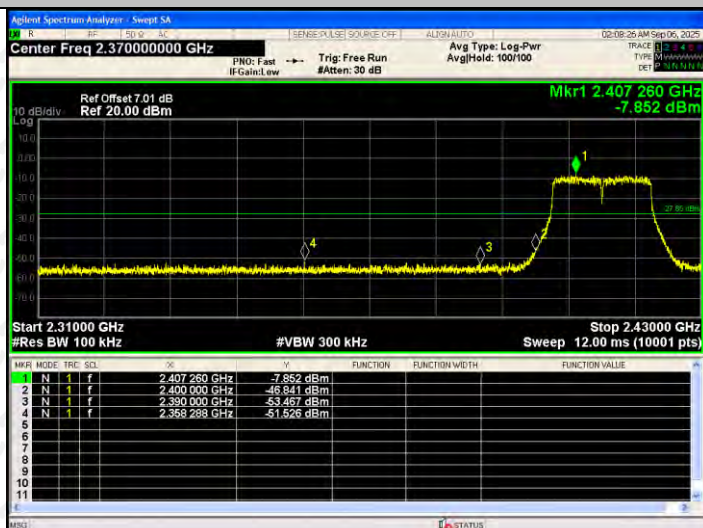


802.11n(HT20)/HCH

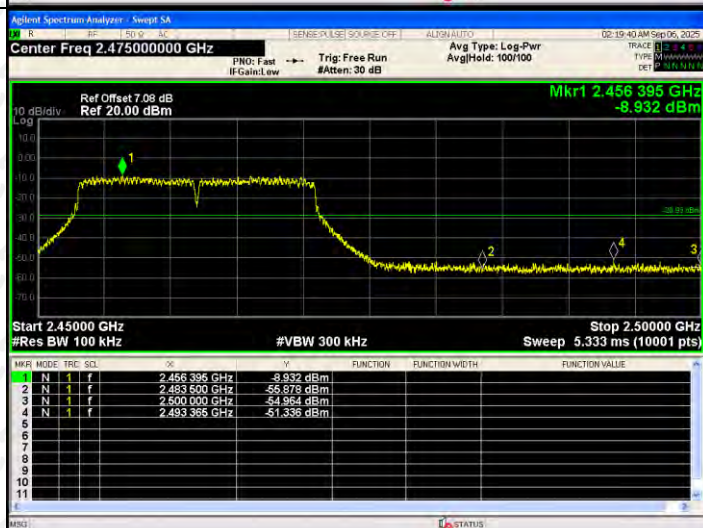

BAND EDGE Graphs

802.11n(HT40)/LCH

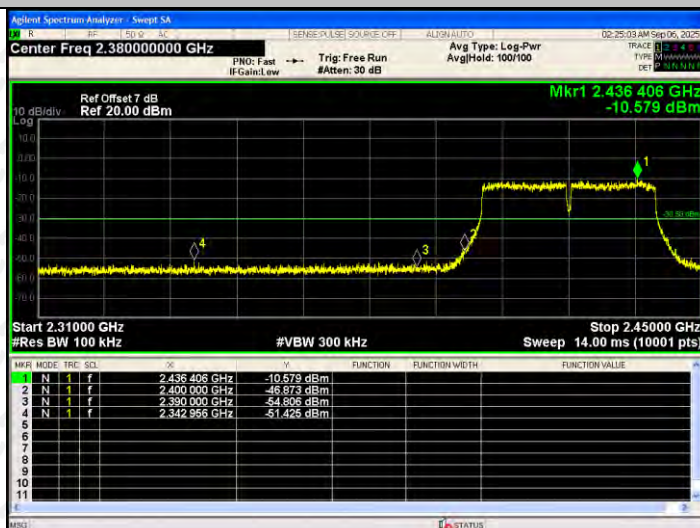


802.11n(HT40)/HCH




BAND EDGE Graphs

802.11ax(HE20)/
LCH

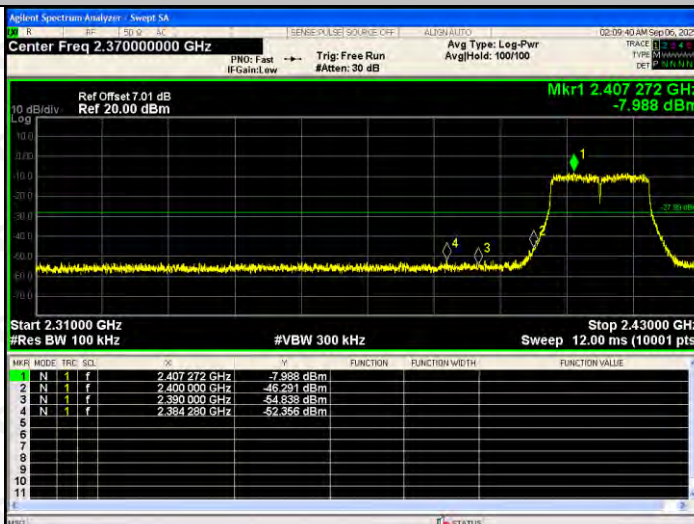


802.11ax(HE20)/
HCH

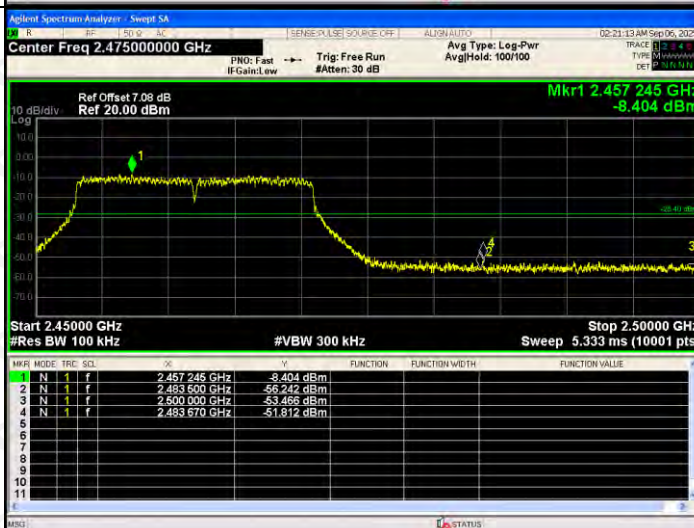

BAND EDGE Graphs

802.11ax(HE40)/
LCH

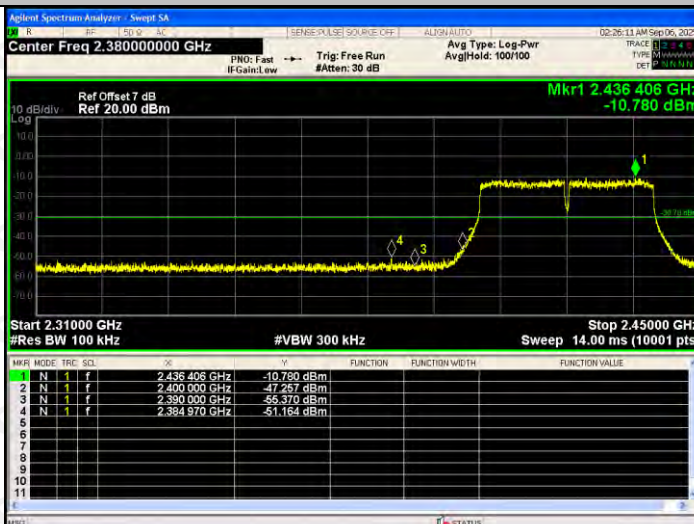


802.11ax(HE40)/
HCH




RF Conducted Spurious Emissions Graphs


802.11b/LCH

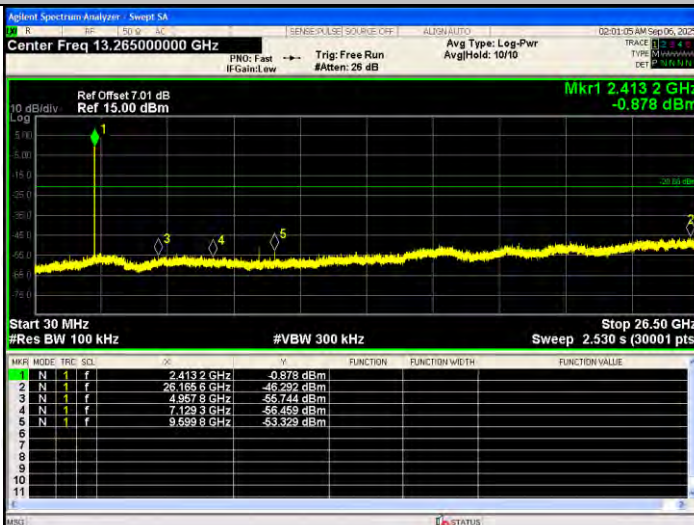

802.11b/MCH

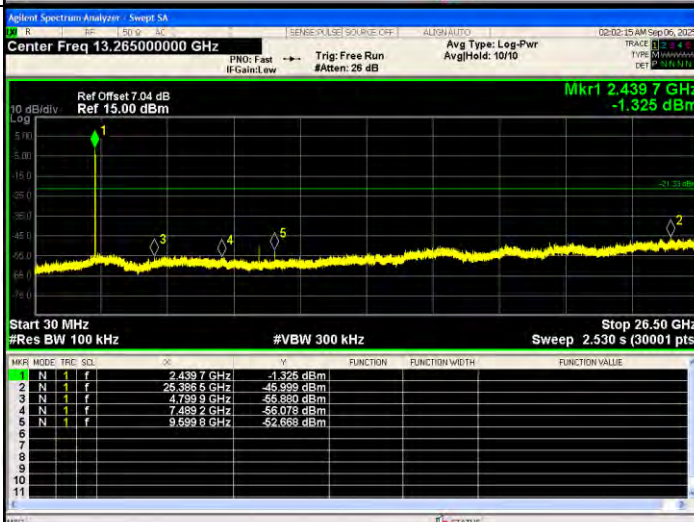


802.11b/HCH

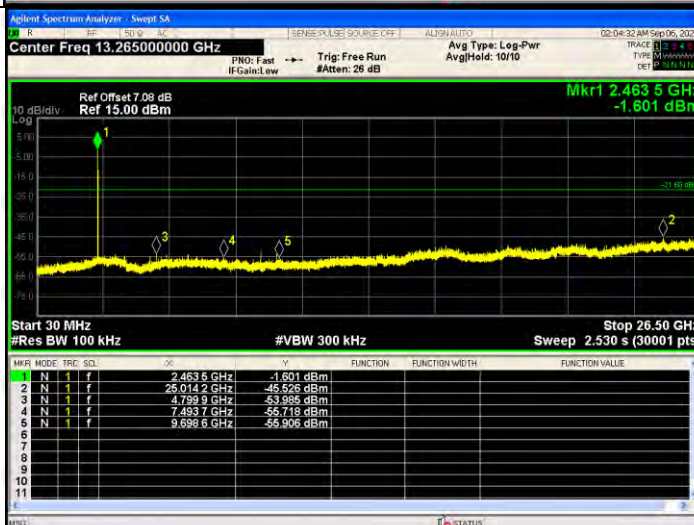


RF Conducted Spurious Emissions Graphs


802.11g/LCH

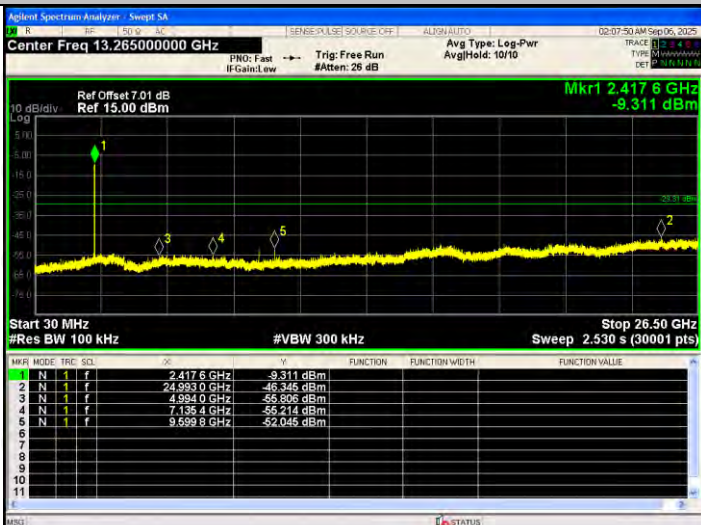

802.11g/MCH

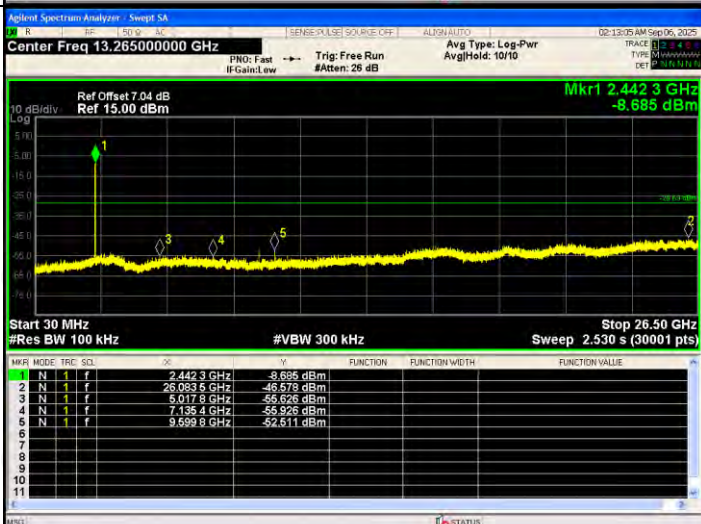


802.11g/HCH

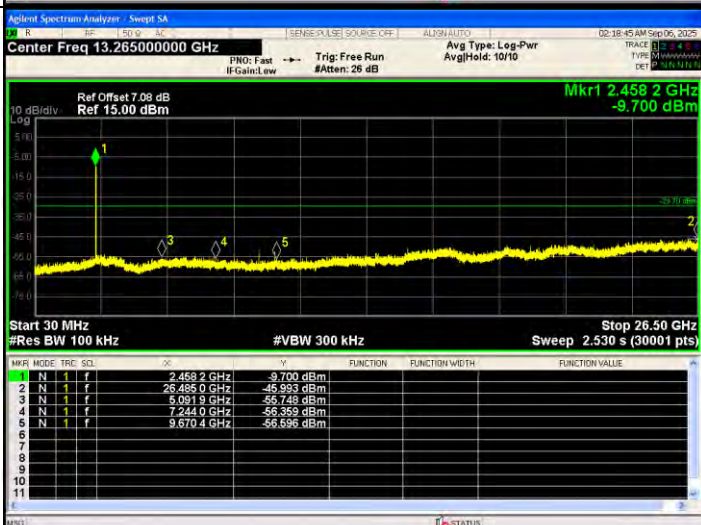


RF Conducted Spurious Emissions Graphs


802.11n(HT20)/
LCH



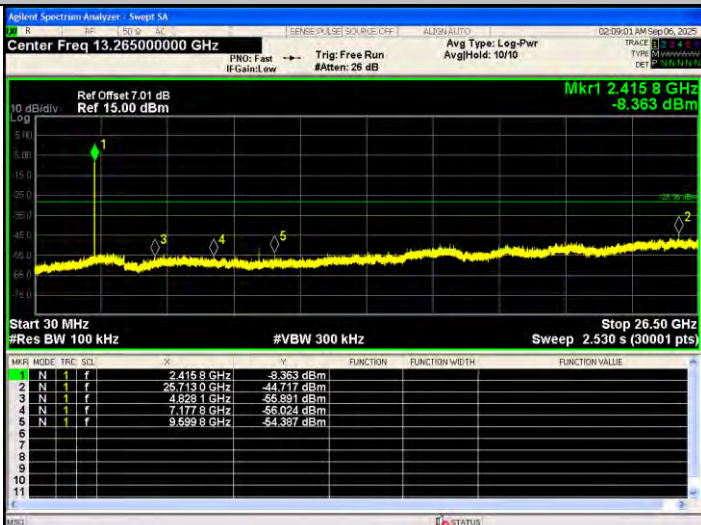


802.11n(HT20)/
MCH

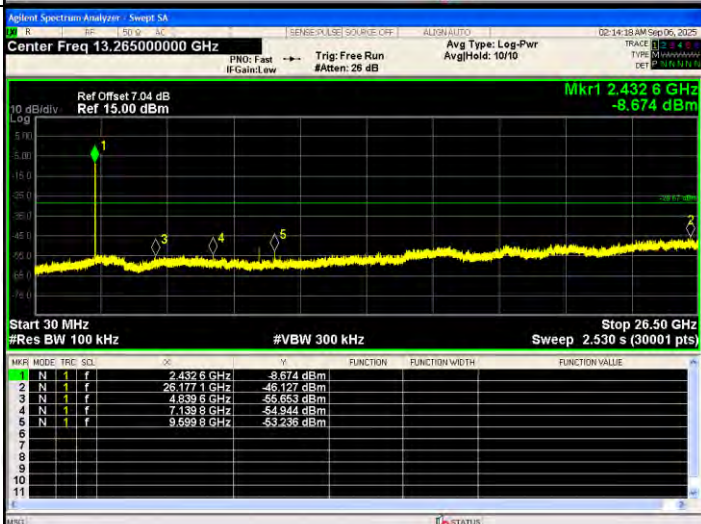


802.11n(HT20)/
HCH

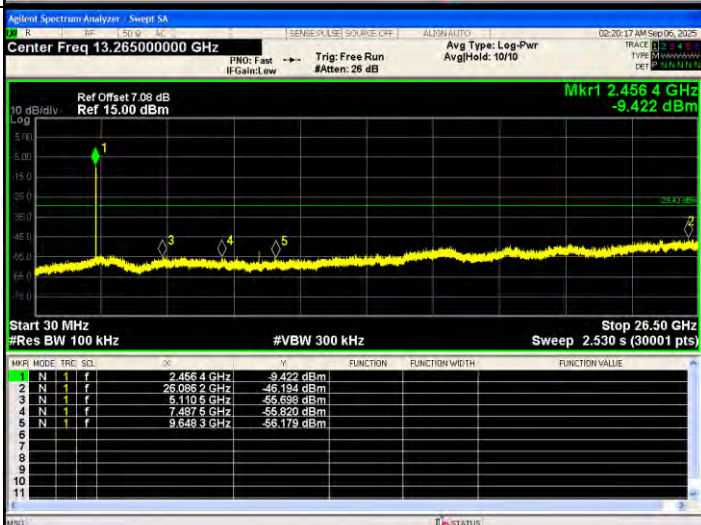

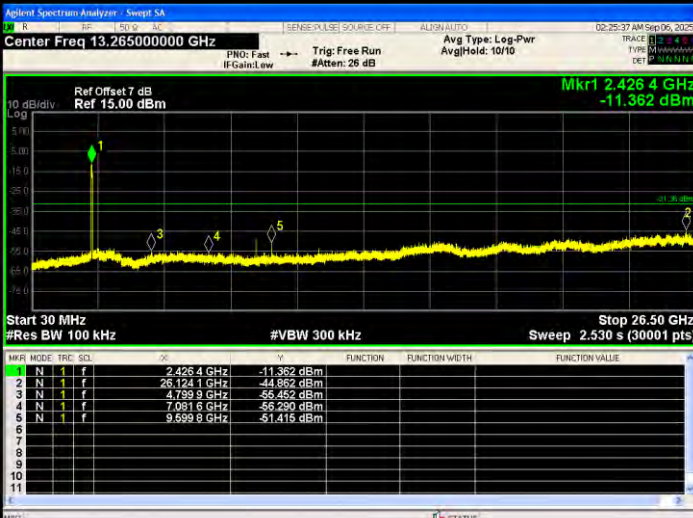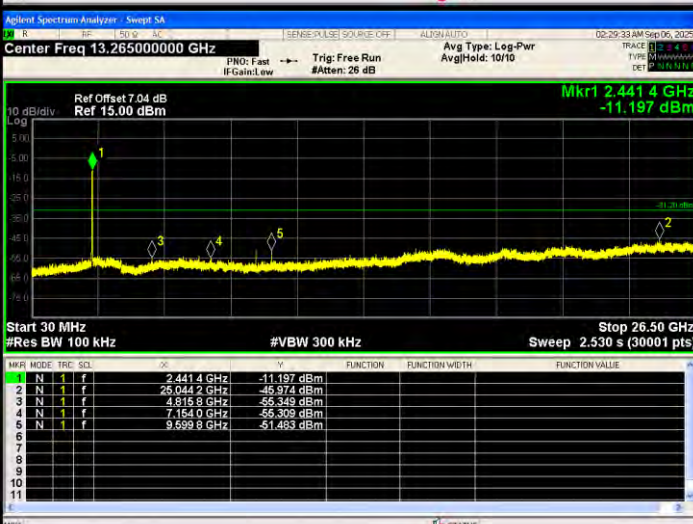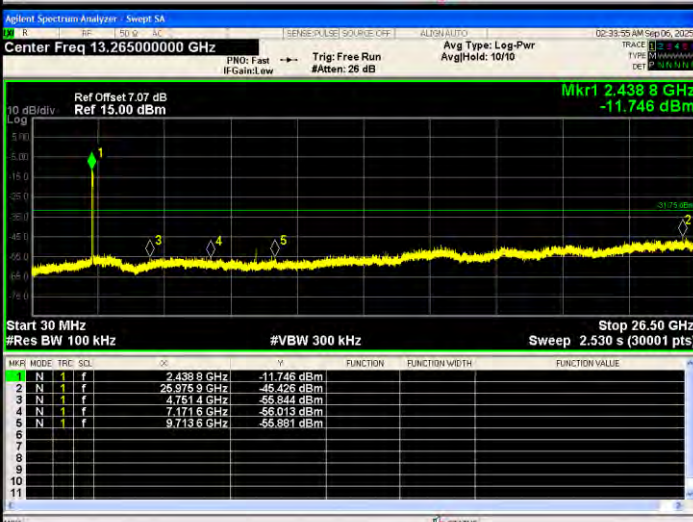
802.11n(HT40)/ LCH	 <table><tr><th>MKR</th><th>MODE</th><th>FREQ</th><th>POWER</th></tr><tr><td>1</td><td>N</td><td>2.4264 GHz</td><td>-11.362 dBm</td></tr><tr><td>2</td><td>N</td><td>26.1241 GHz</td><td>-44.862 dBm</td></tr><tr><td>3</td><td>N</td><td>4.7899 GHz</td><td>-55.452 dBm</td></tr><tr><td>4</td><td>N</td><td>7.0816 GHz</td><td>-55.250 dBm</td></tr><tr><td>5</td><td>N</td><td>9.6998 GHz</td><td>-51.415 dBm</td></tr></table>	MKR	MODE	FREQ	POWER	1	N	2.4264 GHz	-11.362 dBm	2	N	26.1241 GHz	-44.862 dBm	3	N	4.7899 GHz	-55.452 dBm	4	N	7.0816 GHz	-55.250 dBm	5	N	9.6998 GHz	-51.415 dBm	
MKR	MODE	FREQ	POWER																							
1	N	2.4264 GHz	-11.362 dBm																							
2	N	26.1241 GHz	-44.862 dBm																							
3	N	4.7899 GHz	-55.452 dBm																							
4	N	7.0816 GHz	-55.250 dBm																							
5	N	9.6998 GHz	-51.415 dBm																							
802.11n(HT40)/ MCH	 <table><tr><th>MKR</th><th>MODE</th><th>FREQ</th><th>POWER</th></tr><tr><td>1</td><td>N</td><td>2.4414 GHz</td><td>-11.197 dBm</td></tr><tr><td>2</td><td>N</td><td>26.0442 GHz</td><td>-46.974 dBm</td></tr><tr><td>3</td><td>N</td><td>4.8158 GHz</td><td>-55.349 dBm</td></tr><tr><td>4</td><td>N</td><td>7.1150 GHz</td><td>-55.302 dBm</td></tr><tr><td>5</td><td>N</td><td>9.6998 GHz</td><td>-51.483 dBm</td></tr></table>	MKR	MODE	FREQ	POWER	1	N	2.4414 GHz	-11.197 dBm	2	N	26.0442 GHz	-46.974 dBm	3	N	4.8158 GHz	-55.349 dBm	4	N	7.1150 GHz	-55.302 dBm	5	N	9.6998 GHz	-51.483 dBm	
MKR	MODE	FREQ	POWER																							
1	N	2.4414 GHz	-11.197 dBm																							
2	N	26.0442 GHz	-46.974 dBm																							
3	N	4.8158 GHz	-55.349 dBm																							
4	N	7.1150 GHz	-55.302 dBm																							
5	N	9.6998 GHz	-51.483 dBm																							
802.11n(HT40)/ HCH	 <table><tr><th>MKR</th><th>MODE</th><th>FREQ</th><th>POWER</th></tr><tr><td>1</td><td>N</td><td>2.4388 GHz</td><td>-11.746 dBm</td></tr><tr><td>2</td><td>N</td><td>26.9759 GHz</td><td>-46.426 dBm</td></tr><tr><td>3</td><td>N</td><td>4.7514 GHz</td><td>-55.844 dBm</td></tr><tr><td>4</td><td>N</td><td>7.1716 GHz</td><td>-55.013 dBm</td></tr><tr><td>5</td><td>N</td><td>9.7136 GHz</td><td>-55.881 dBm</td></tr></table>	MKR	MODE	FREQ	POWER	1	N	2.4388 GHz	-11.746 dBm	2	N	26.9759 GHz	-46.426 dBm	3	N	4.7514 GHz	-55.844 dBm	4	N	7.1716 GHz	-55.013 dBm	5	N	9.7136 GHz	-55.881 dBm	
MKR	MODE	FREQ	POWER																							
1	N	2.4388 GHz	-11.746 dBm																							
2	N	26.9759 GHz	-46.426 dBm																							
3	N	4.7514 GHz	-55.844 dBm																							
4	N	7.1716 GHz	-55.013 dBm																							
5	N	9.7136 GHz	-55.881 dBm																							

RF Conducted Spurious Emissions Graphs


802.11ax(HE20)/
LCH

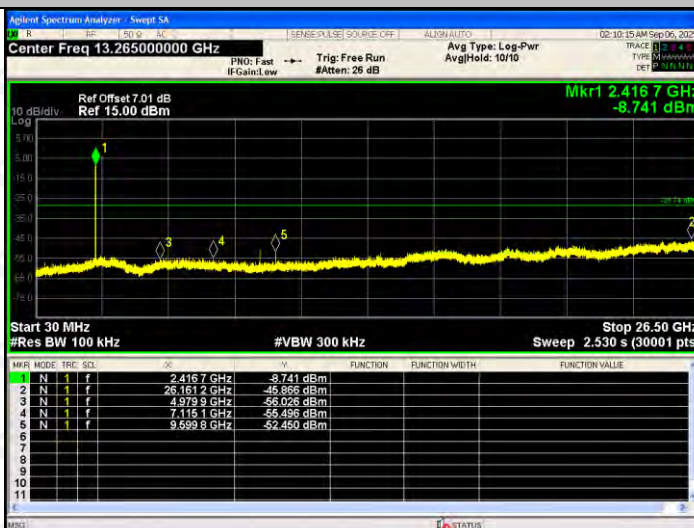




802.11ax(HE20)/
MCH

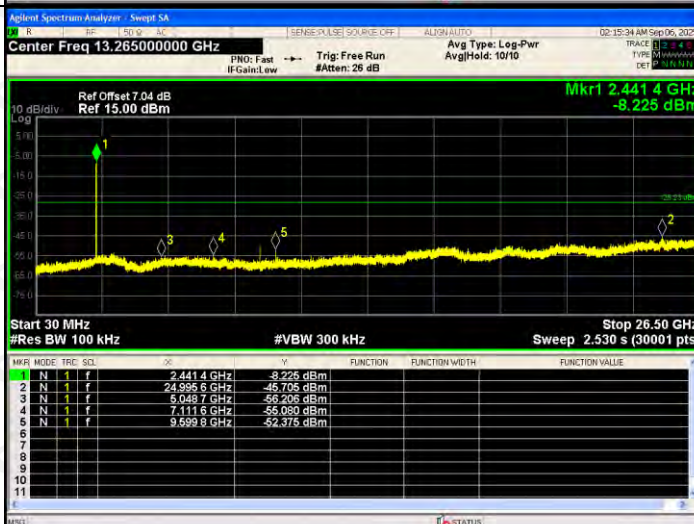

802.11ax(HE20)/
HCH

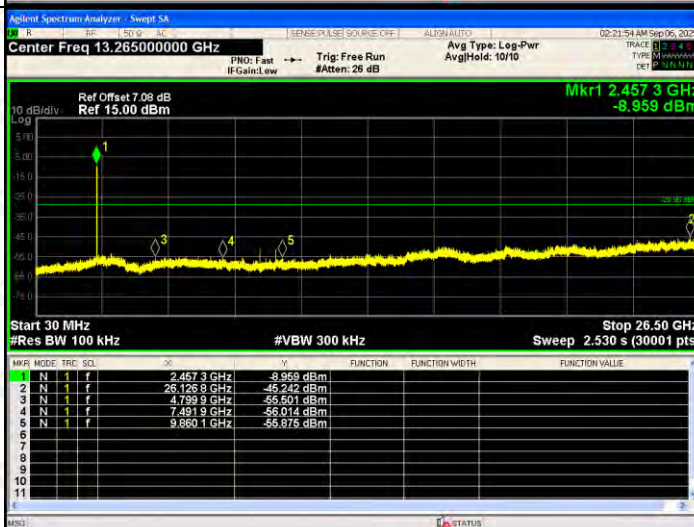


RF Conducted Spurious Emissions Graphs

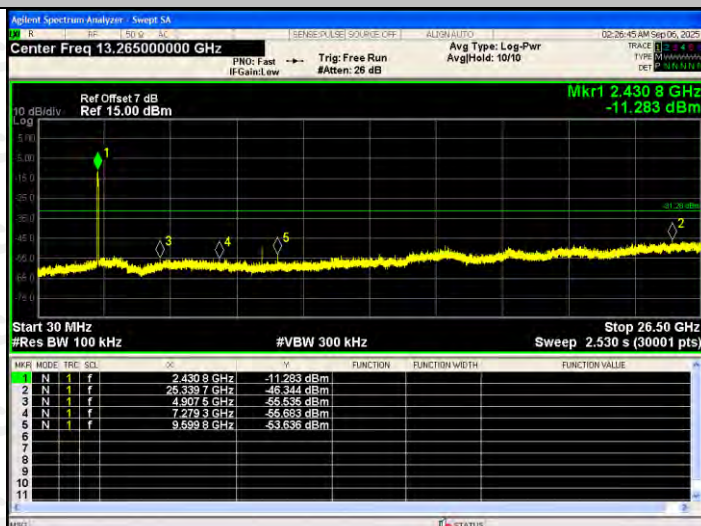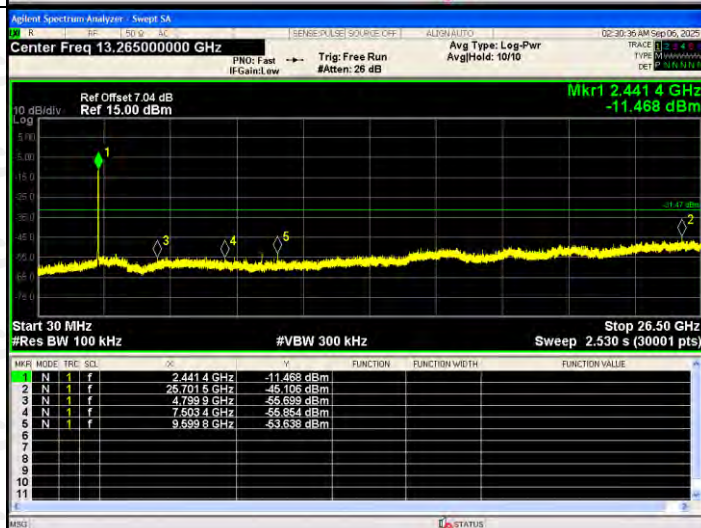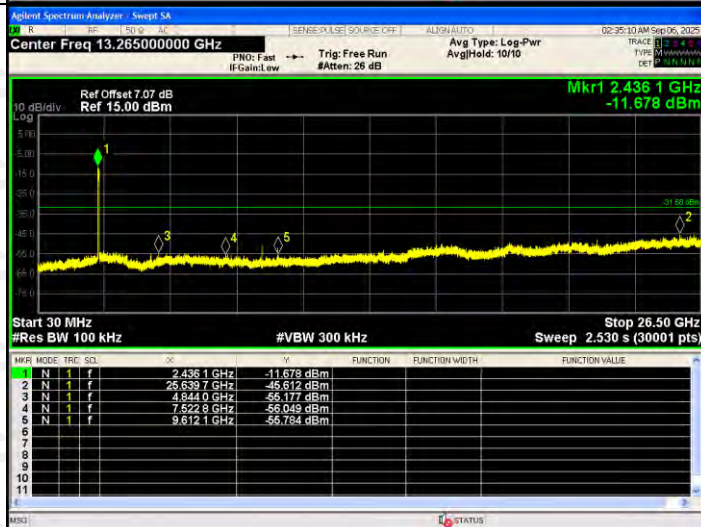802.11ax(HE40)/
LCH

802.11ax(HE40)/
MCH

802.11ax(HE40)/
HCH


ANT2:

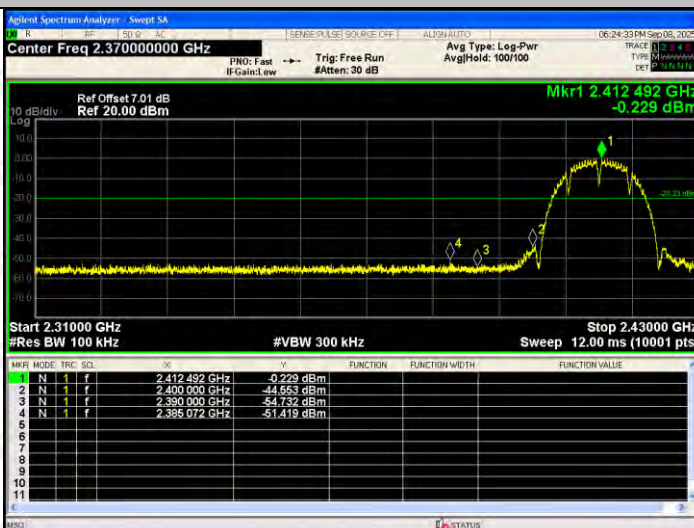BAND EDGE Graphs

802.11b/LCH




802.11b/HCH




BAND EDGE Graphs

802.11g/LCH

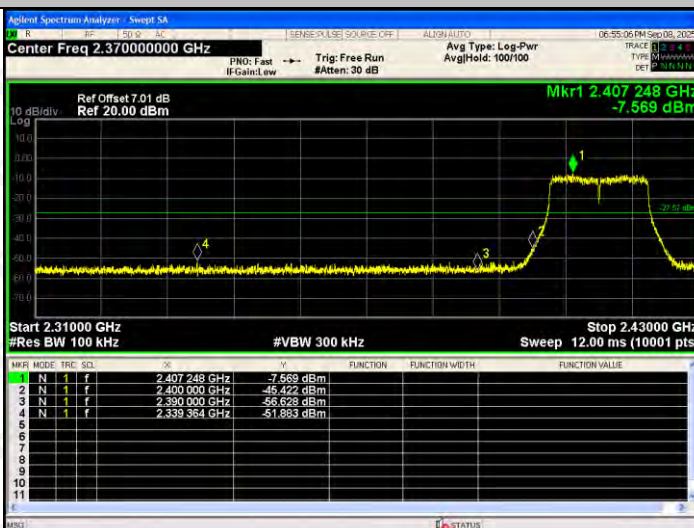


802.11g/HCH

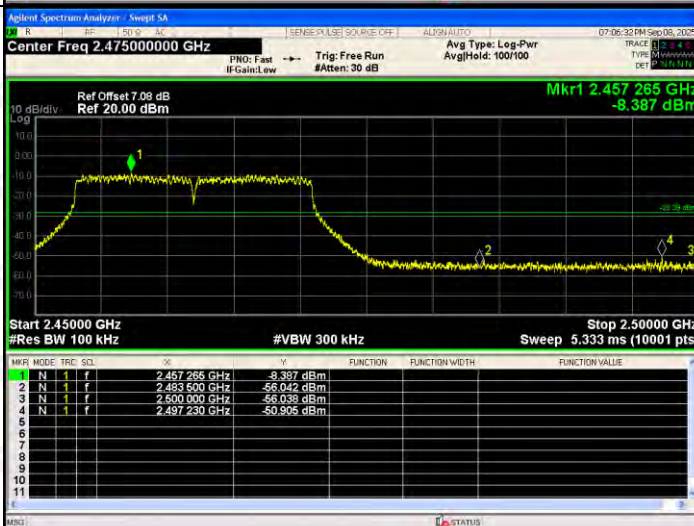


BAND EDGE Graphs

802.11n(HT20)/
LCH

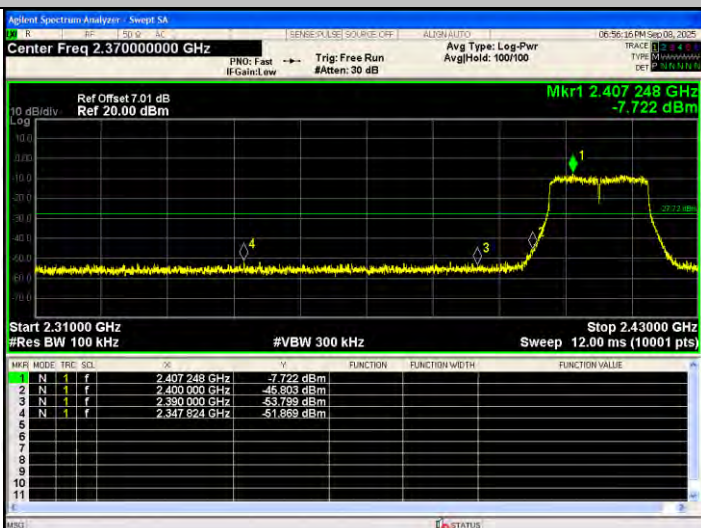


802.11n(HT20)/
HCH

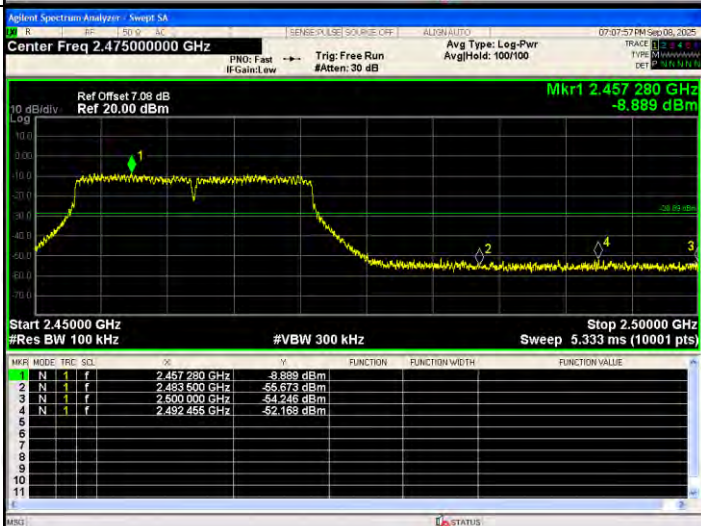


BAND EDGE Graphs

802.11n(HT40)/
LCH

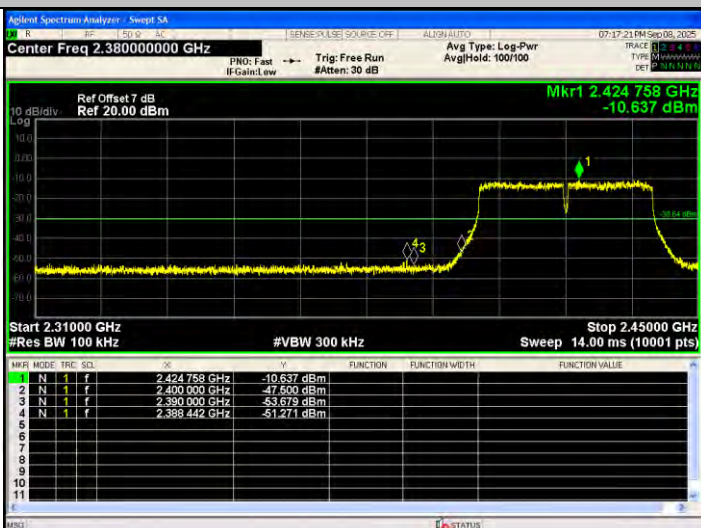


802.11n(HT40)/
HCH

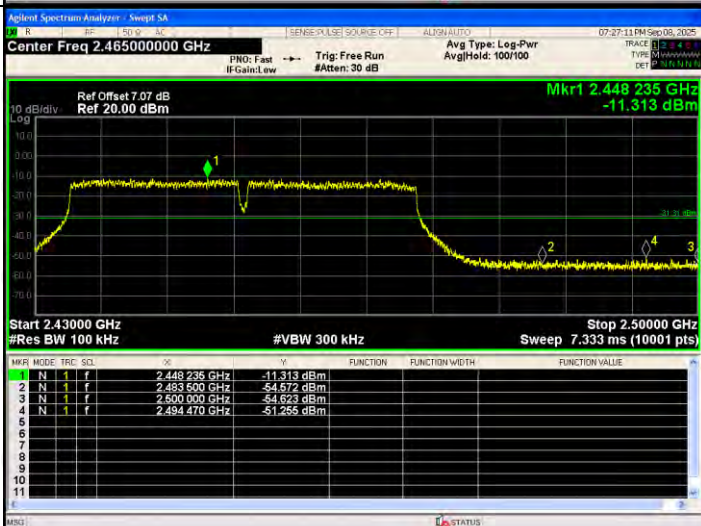


BAND EDGE Graphs

802.11ax(HE20)/
LCH

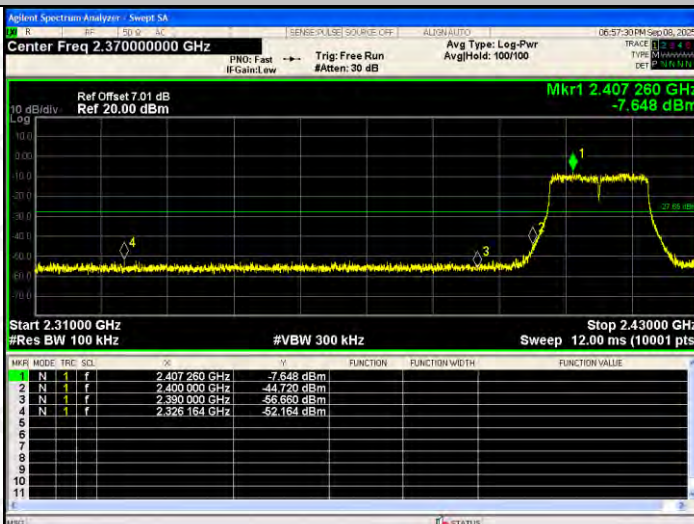


802.11ax(HE20)/
HCH

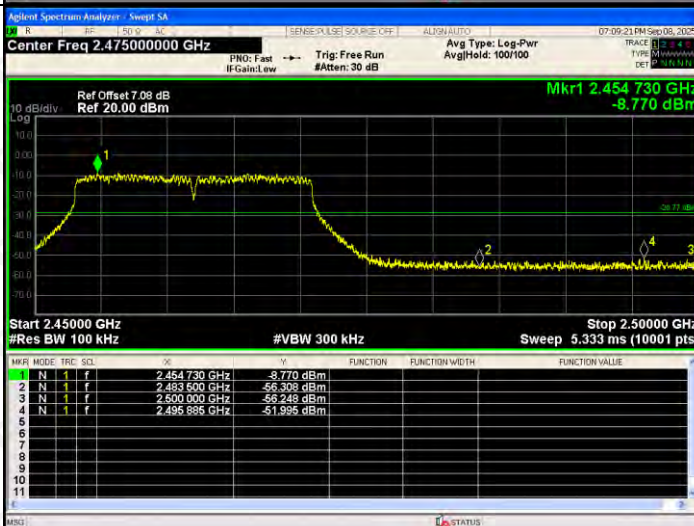

BAND EDGE Graphs

802.11ax(HE40)
/LCH

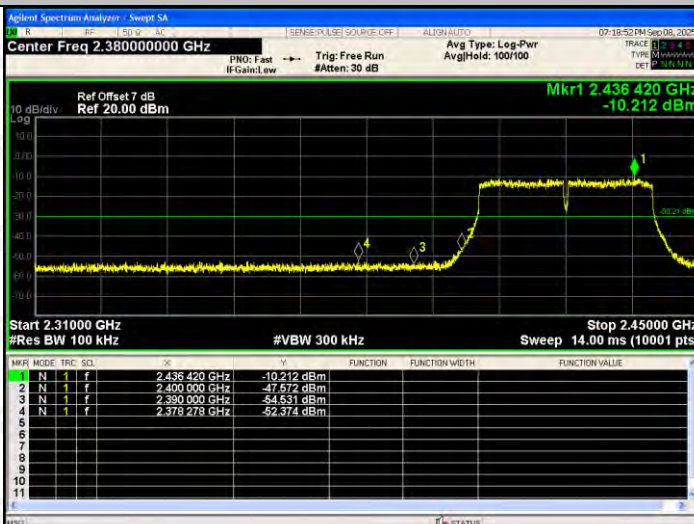


802.11ax(HE40)
/HCH




RF Conducted Spurious Emissions Graphs


802.11b/LCH

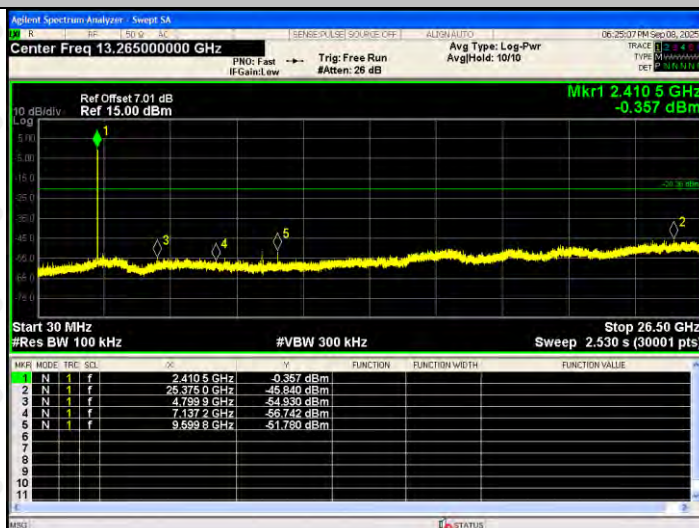

802.11b/MCH

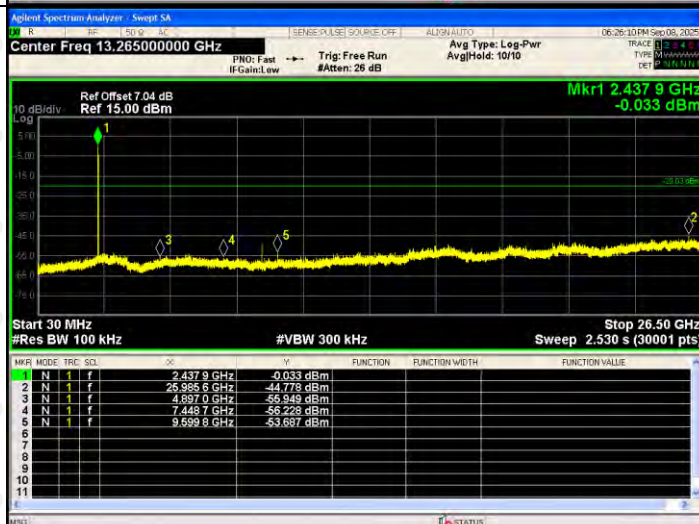


802.11b/HCH

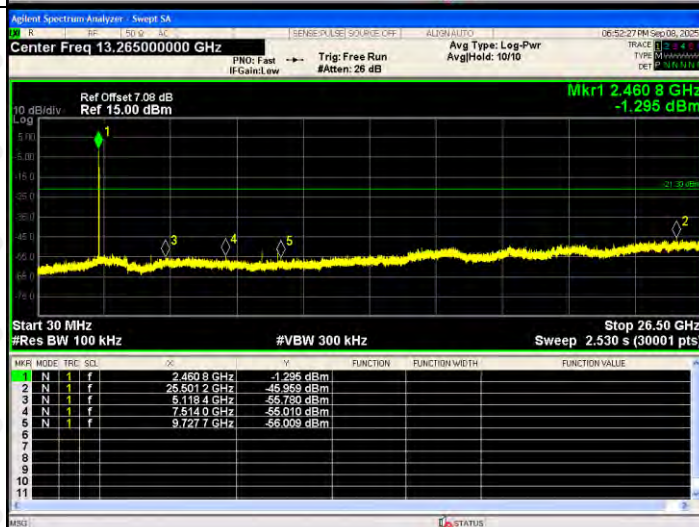


RF Conducted Spurious Emissions Graphs


802.11g/LCH

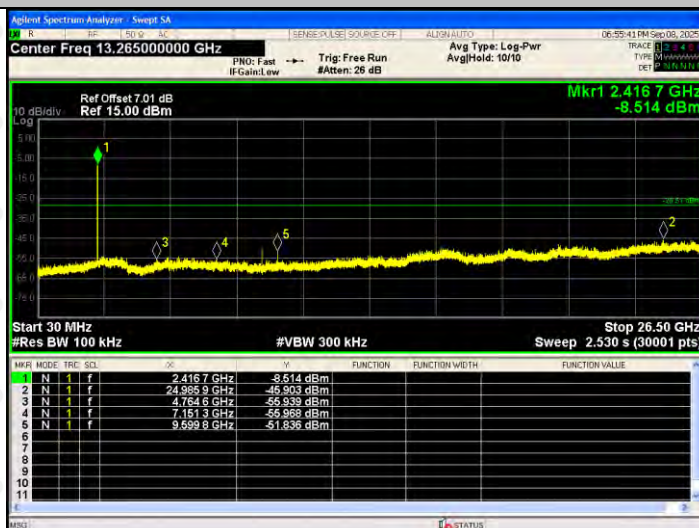

802.11g/MCH

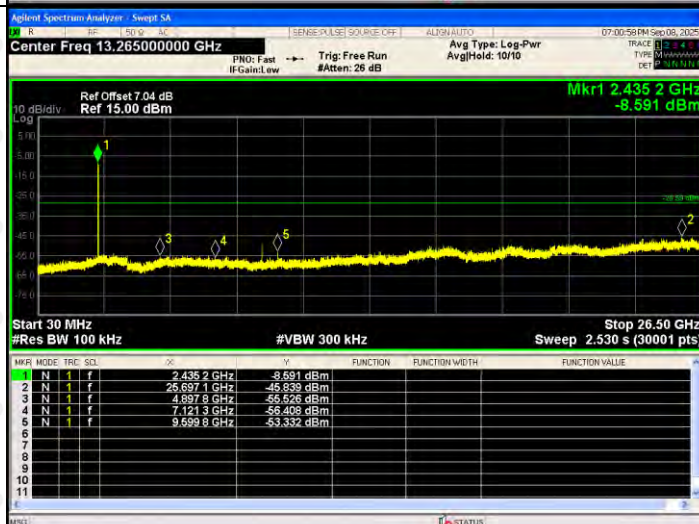


802.11g/HCH

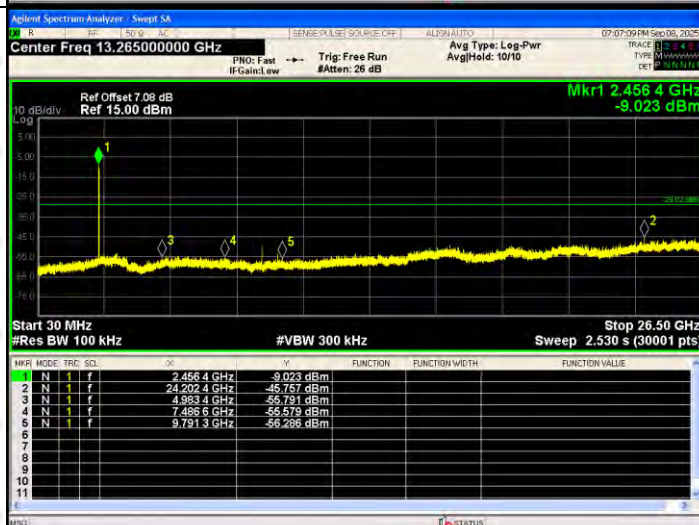


RF Conducted Spurious Emissions Graphs


802.11n(HT20)
/LCH



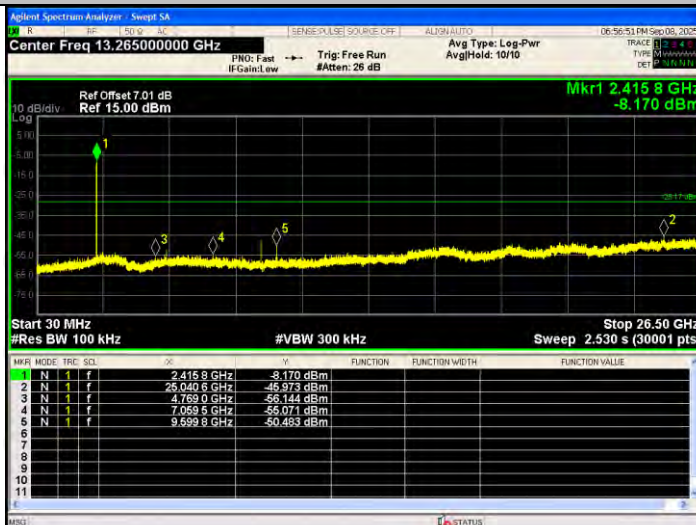


802.11n(HT20)
/MCH

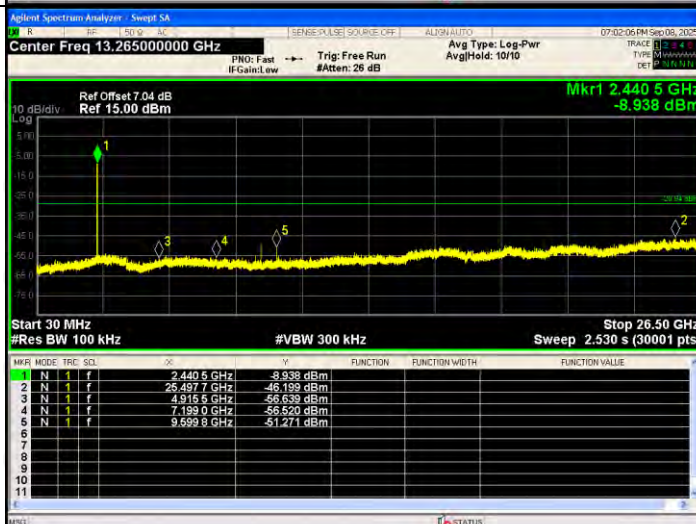


802.11n(HT20)
/HCH

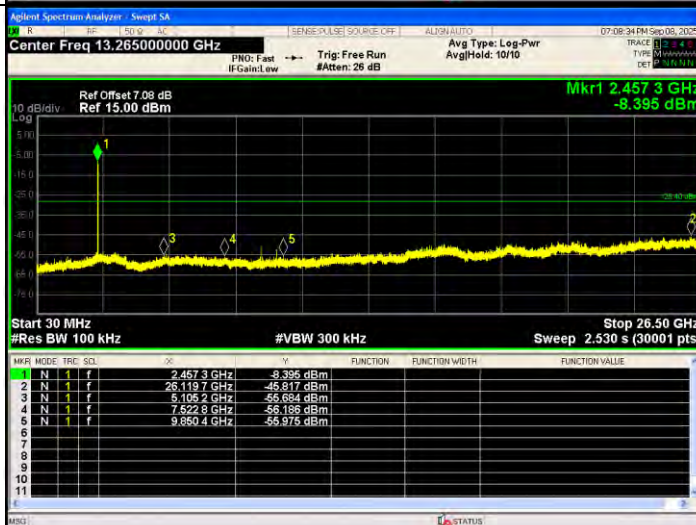

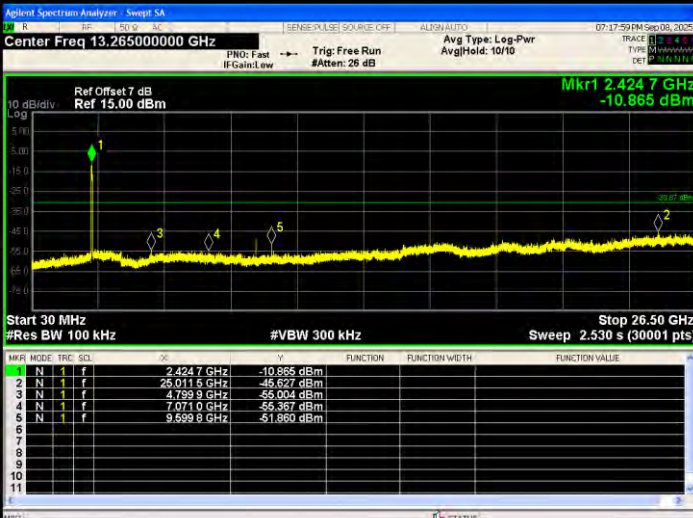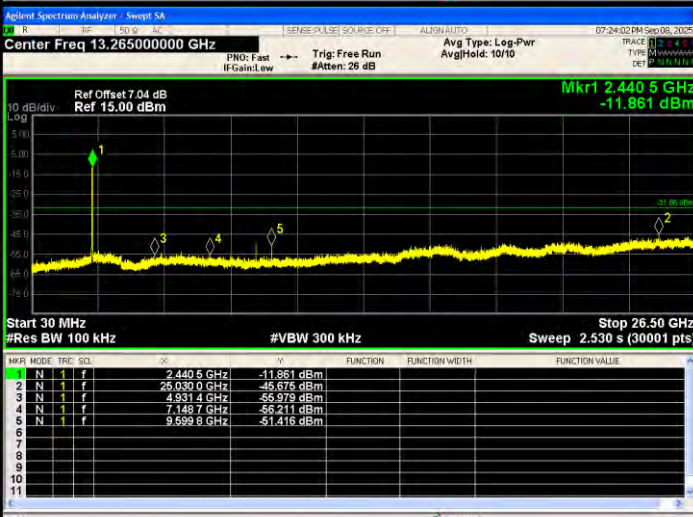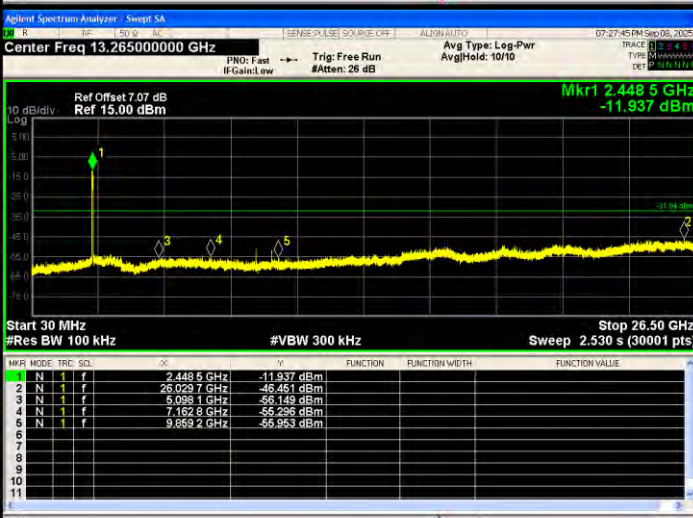
802.11n(HT40) /LCH	 <table><tr><th>MKR</th><th>MODE</th><th>FREQ</th><th>POWER</th></tr><tr><td>1</td><td>N</td><td>2.4247 GHz</td><td>-10.865 dBm</td></tr><tr><td>2</td><td>N</td><td>2.50115 GHz</td><td>-46.627 dBm</td></tr><tr><td>3</td><td>N</td><td>4.7699 GHz</td><td>-56.004 dBm</td></tr><tr><td>4</td><td>N</td><td>7.0710 GHz</td><td>-56.367 dBm</td></tr><tr><td>5</td><td>N</td><td>9.6998 GHz</td><td>-51.860 dBm</td></tr></table>	MKR	MODE	FREQ	POWER	1	N	2.4247 GHz	-10.865 dBm	2	N	2.50115 GHz	-46.627 dBm	3	N	4.7699 GHz	-56.004 dBm	4	N	7.0710 GHz	-56.367 dBm	5	N	9.6998 GHz	-51.860 dBm	
MKR	MODE	FREQ	POWER																							
1	N	2.4247 GHz	-10.865 dBm																							
2	N	2.50115 GHz	-46.627 dBm																							
3	N	4.7699 GHz	-56.004 dBm																							
4	N	7.0710 GHz	-56.367 dBm																							
5	N	9.6998 GHz	-51.860 dBm																							
802.11n(HT40) /MCH	 <table><tr><th>MKR</th><th>MODE</th><th>FREQ</th><th>POWER</th></tr><tr><td>1</td><td>N</td><td>2.4405 GHz</td><td>-11.861 dBm</td></tr><tr><td>2</td><td>N</td><td>2.5030 GHz</td><td>-46.675 dBm</td></tr><tr><td>3</td><td>N</td><td>4.9314 GHz</td><td>-56.979 dBm</td></tr><tr><td>4</td><td>N</td><td>7.1487 GHz</td><td>-56.211 dBm</td></tr><tr><td>5</td><td>N</td><td>9.6998 GHz</td><td>-51.416 dBm</td></tr></table>	MKR	MODE	FREQ	POWER	1	N	2.4405 GHz	-11.861 dBm	2	N	2.5030 GHz	-46.675 dBm	3	N	4.9314 GHz	-56.979 dBm	4	N	7.1487 GHz	-56.211 dBm	5	N	9.6998 GHz	-51.416 dBm	
MKR	MODE	FREQ	POWER																							
1	N	2.4405 GHz	-11.861 dBm																							
2	N	2.5030 GHz	-46.675 dBm																							
3	N	4.9314 GHz	-56.979 dBm																							
4	N	7.1487 GHz	-56.211 dBm																							
5	N	9.6998 GHz	-51.416 dBm																							
802.11n(HT40) /HCH	 <table><tr><th>MKR</th><th>MODE</th><th>FREQ</th><th>POWER</th></tr><tr><td>1</td><td>N</td><td>2.4485 GHz</td><td>-11.937 dBm</td></tr><tr><td>2</td><td>N</td><td>2.6029 GHz</td><td>-46.451 dBm</td></tr><tr><td>3</td><td>N</td><td>5.0991 GHz</td><td>-56.149 dBm</td></tr><tr><td>4</td><td>N</td><td>7.1698 GHz</td><td>-56.226 dBm</td></tr><tr><td>5</td><td>N</td><td>9.6992 GHz</td><td>-56.953 dBm</td></tr></table>	MKR	MODE	FREQ	POWER	1	N	2.4485 GHz	-11.937 dBm	2	N	2.6029 GHz	-46.451 dBm	3	N	5.0991 GHz	-56.149 dBm	4	N	7.1698 GHz	-56.226 dBm	5	N	9.6992 GHz	-56.953 dBm	
MKR	MODE	FREQ	POWER																							
1	N	2.4485 GHz	-11.937 dBm																							
2	N	2.6029 GHz	-46.451 dBm																							
3	N	5.0991 GHz	-56.149 dBm																							
4	N	7.1698 GHz	-56.226 dBm																							
5	N	9.6992 GHz	-56.953 dBm																							

RF Conducted Spurious Emissions Graphs


802.11ax(HE20)
/LCH

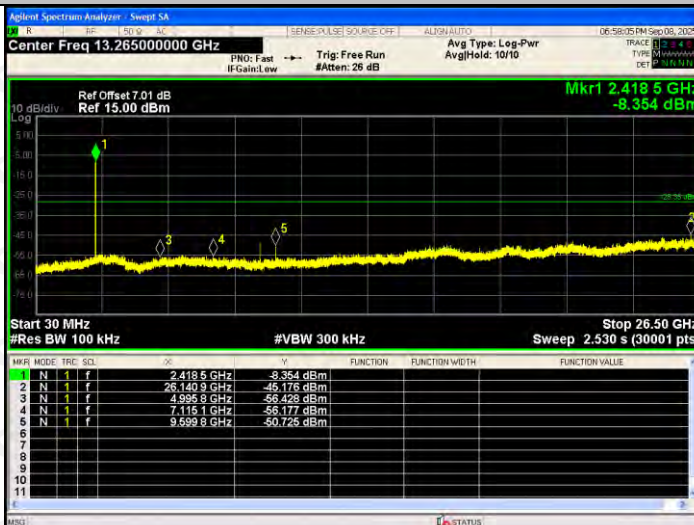

802.11ax(HE20)
/MCH

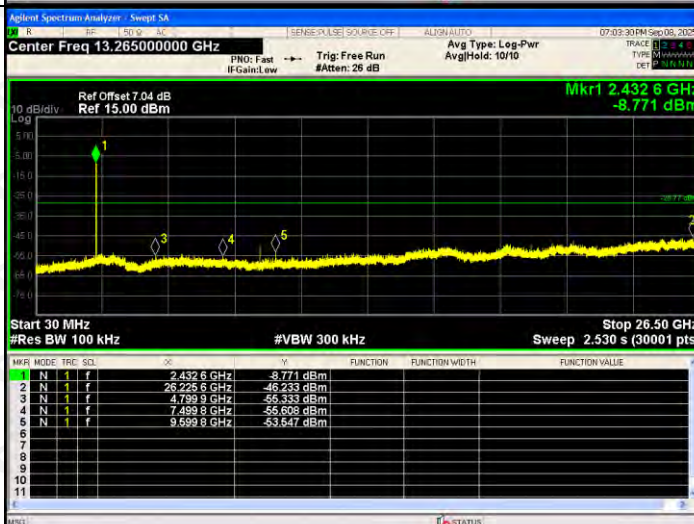


802.11ax(HE20)
/HCH

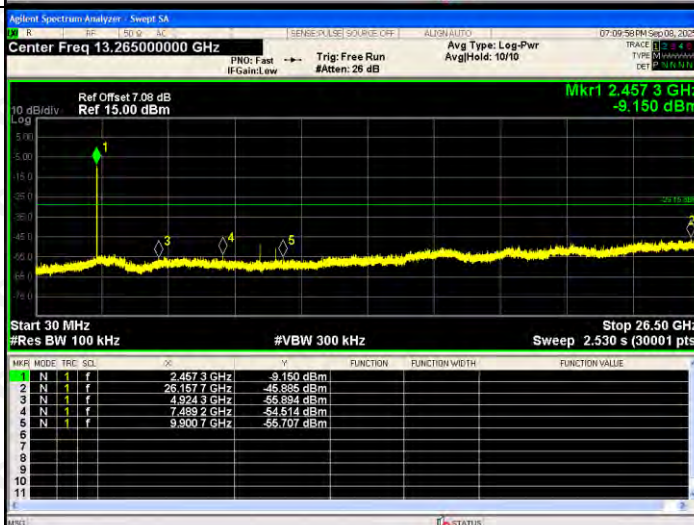


RF Conducted Spurious Emissions Graphs


802.11ax(HE40)
/LCH

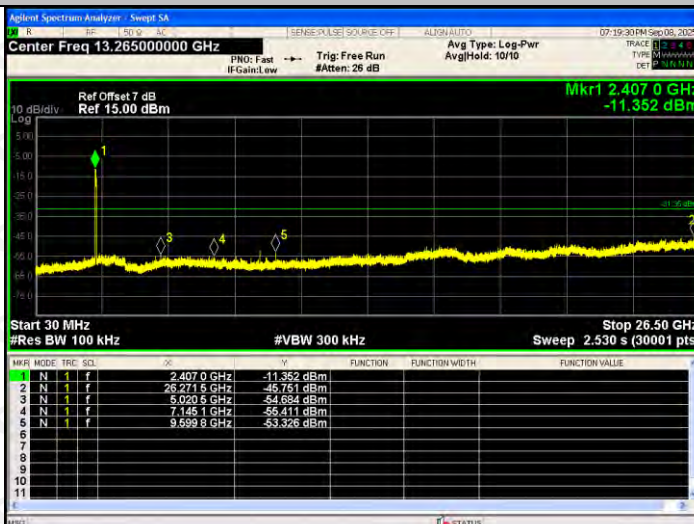

802.11ax(HE40)
/MCH

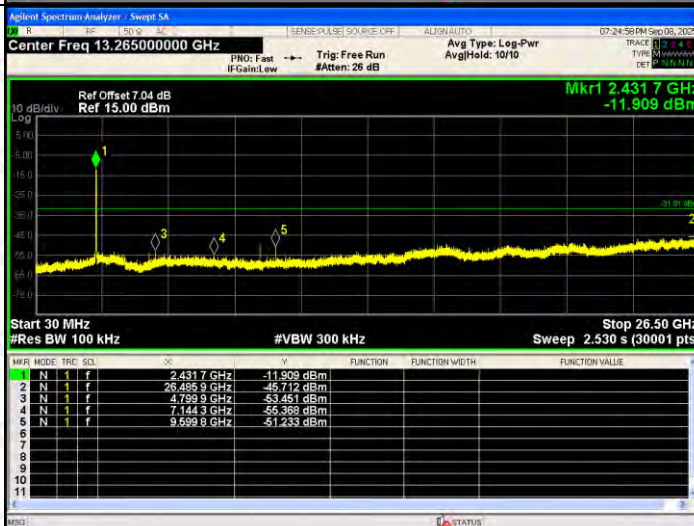


802.11ax(HE40)
/HCH

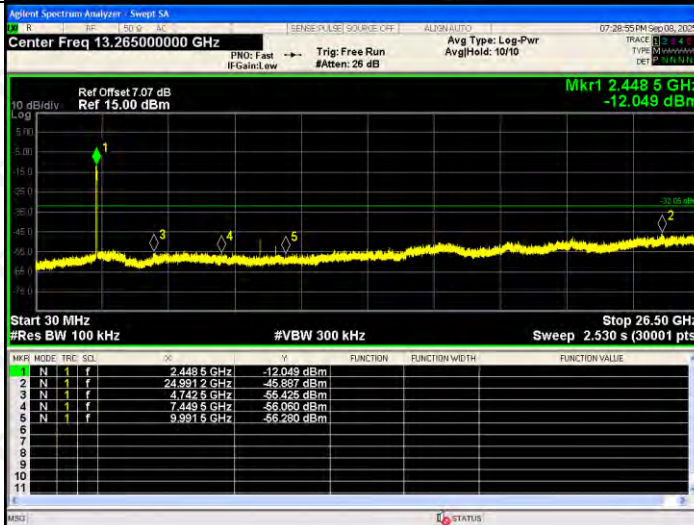

9. CONDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

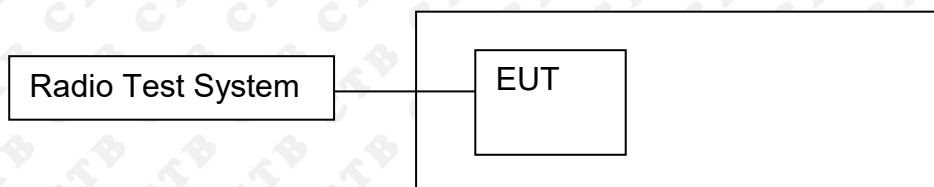

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ant 1	Maximum Peak Power [dBm] ant 2	Total Power Peak Output Power(dBm)	Limit[dBm]
802.11b	LCH	12.704	13.135	/	30
	MCH	12.853	13.301	/	30
	HCH	12.058	12.165	/	30
802.11g	LCH	12.304	12.552	/	30
	MCH	12.421	12.524	/	30
	HCH	11.782	11.724	/	30
802.11n(HT20)	LCH	12.263	12.517	15.402	30
	MCH	12.377	12.485	15.442	30
	HCH	11.787	11.772	14.790	30
802.11n(HT40)	LCH	12.590	12.816	15.715	30
	MCH	12.608	12.699	15.664	30
	HCH	12.426	12.357	15.402	30
802.11ax(HE20)	LCH	12.289	12.475	15.393	30
	MCH	12.446	12.533	15.500	30
	HCH	11.734	11.713	14.734	30
802.11ax(HE40)	LCH	12.596	12.804	15.712	30
	MCH	12.596	12.705	15.661	30
	HCH	12.419	12.369	15.404	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

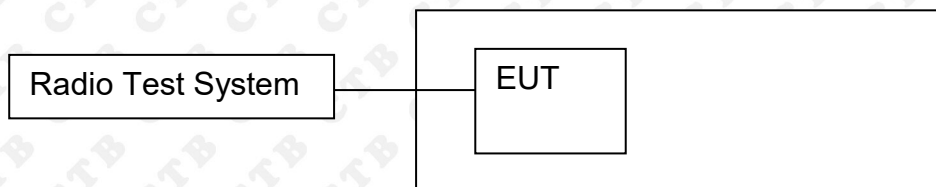

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{kHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:




Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.109	500	PASS
	MCH	10.121	500	PASS
	HCH	10.116	500	PASS
802.11g	LCH	17.762	500	PASS
	MCH	17.767	500	PASS
	HCH	17.779	500	PASS
802.11n(HT20)	LCH	17.767	500	PASS
	MCH	17.780	500	PASS
	HCH	17.748	500	PASS
802.11n(HT40)	LCH	36.501	500	PASS
	MCH	36.493	500	PASS
	HCH	36.479	500	PASS
802.11ax(HE20)	LCH	17.780	500	PASS
	MCH	17.761	500	PASS
	HCH	17.763	500	PASS
802.11ax(HE40)	LCH	36.497	500	PASS
	MCH	36.466	500	PASS
	HCH	36.465	500	PASS




ANT2:




Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.095	500	PASS
	MCH	10.113	500	PASS
	HCH	10.099	500	PASS
802.11g	LCH	17.790	500	PASS
	MCH	17.789	500	PASS
	HCH	17.742	500	PASS
802.11n(HT20)	LCH	17.775	500	PASS
	MCH	17.790	500	PASS
	HCH	17.709	500	PASS
802.11n(HT40)	LCH	36.433	500	PASS
	MCH	36.459	500	PASS
	HCH	36.491	500	PASS
802.11ax(HE20)	LCH	17.762	500	PASS
	MCH	17.758	500	PASS
	HCH	17.771	500	PASS
802.11ax(HE40)	LCH	36.493	500	PASS
	MCH	36.456	500	PASS
	HCH	36.482	500	PASS

ANT1:
Test Graph:

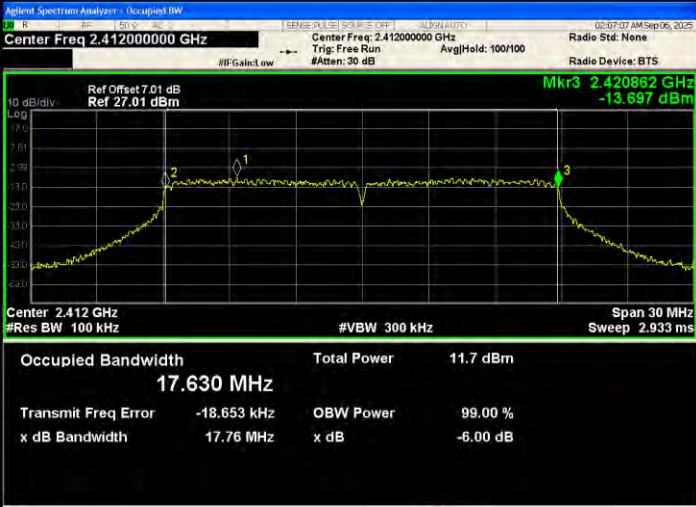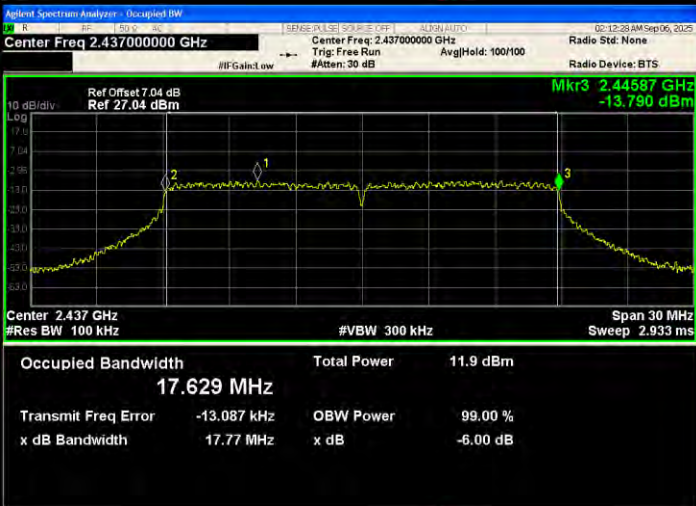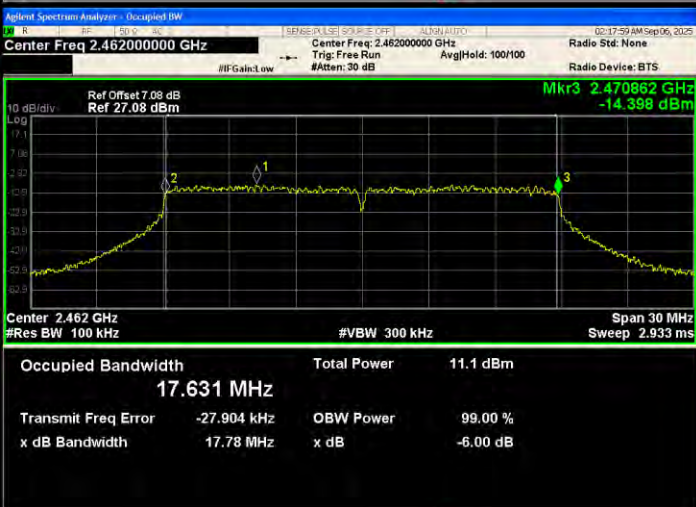

802.11g/LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.420862 GHz -13.697 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.630 MHz Total Power 11.7 dBm Transmit Freq Error -18.653 kHz OBW Power 99.00 % x dB Bandwidth 17.76 MHz x dB -6.00 dB
802.11g/MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.44587 GHz -13.790 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.629 MHz Total Power 11.9 dBm Transmit Freq Error -13.087 kHz OBW Power 99.00 % x dB Bandwidth 17.77 MHz x dB -6.00 dB
802.11g/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 7.08 dB Ref 27.08 dBm Mkr3 2.470862 GHz -14.398 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.631 MHz Total Power 11.1 dBm Transmit Freq Error -27.904 kHz OBW Power 99.00 % x dB Bandwidth 17.78 MHz x dB -6.00 dB

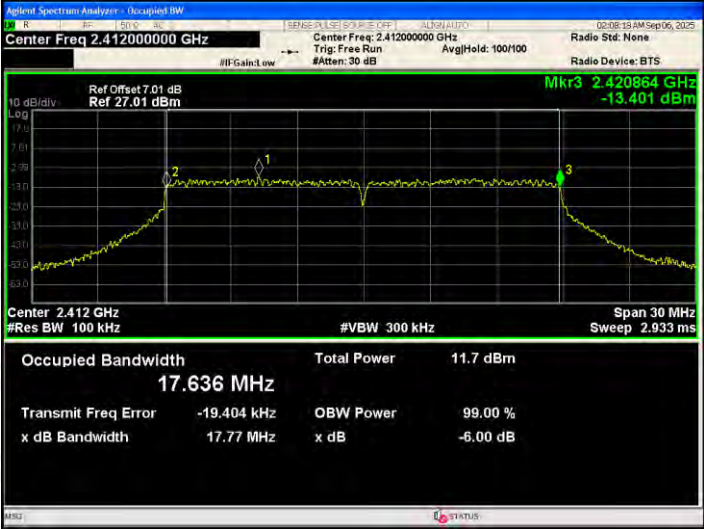
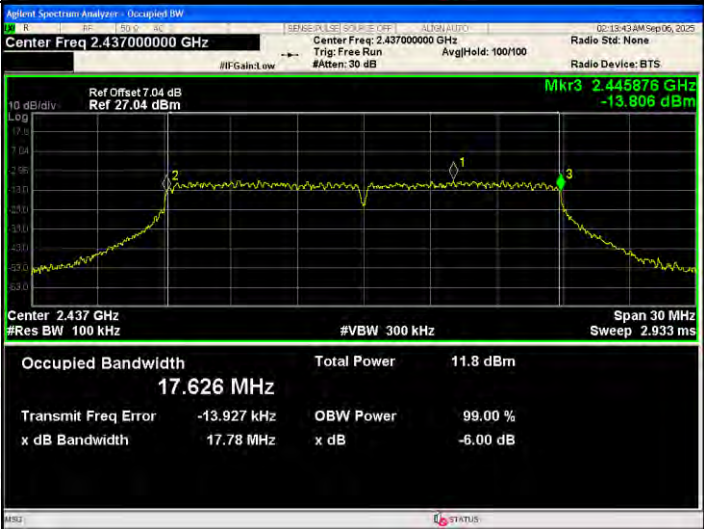
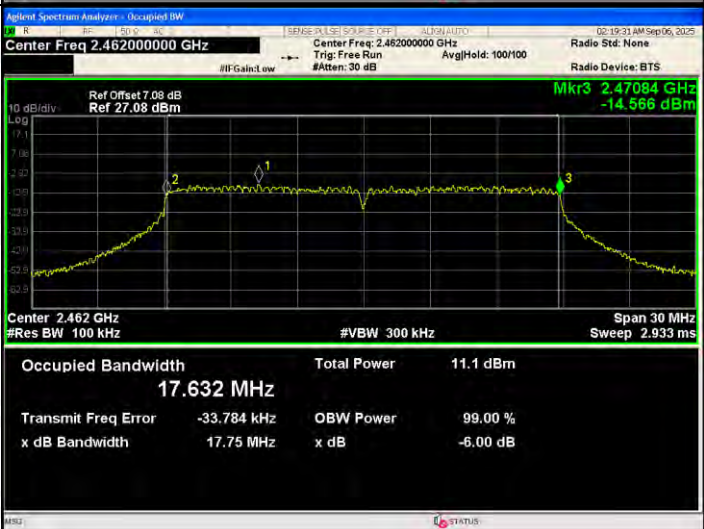
802.11n(HT20) /LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 7.01 dB Ref 27.01 dBm Occupied Bandwidth 17.636 MHz Total Power 11.7 dBm Transmit Freq Error -19.404 kHz x dB Bandwidth 17.77 MHz OBW Power 99.00 % x dB -6.00 dB
802.11n(HT20) /MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Occupied Bandwidth 17.626 MHz Total Power 11.8 dBm Transmit Freq Error -13.927 kHz x dB Bandwidth 17.78 MHz OBW Power 99.00 % x dB -6.00 dB
802.11n(HT20) /HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 7.08 dB Ref 27.08 dBm Occupied Bandwidth 17.632 MHz Total Power 11.1 dBm Transmit Freq Error -33.784 kHz x dB Bandwidth 17.75 MHz OBW Power 99.00 % x dB -6.00 dB

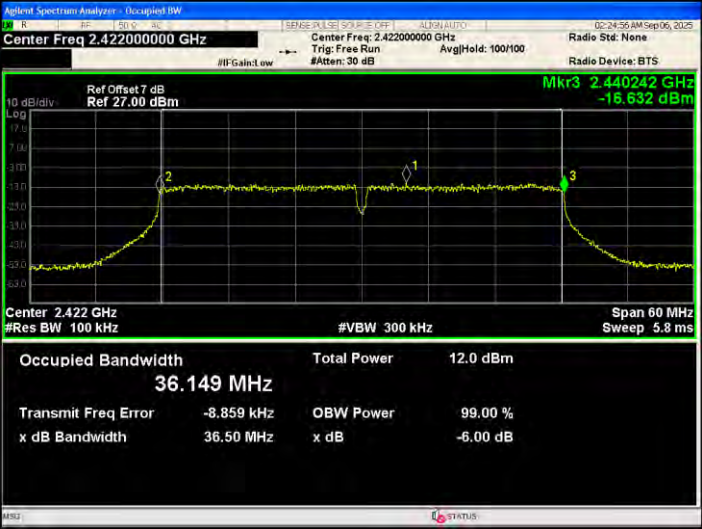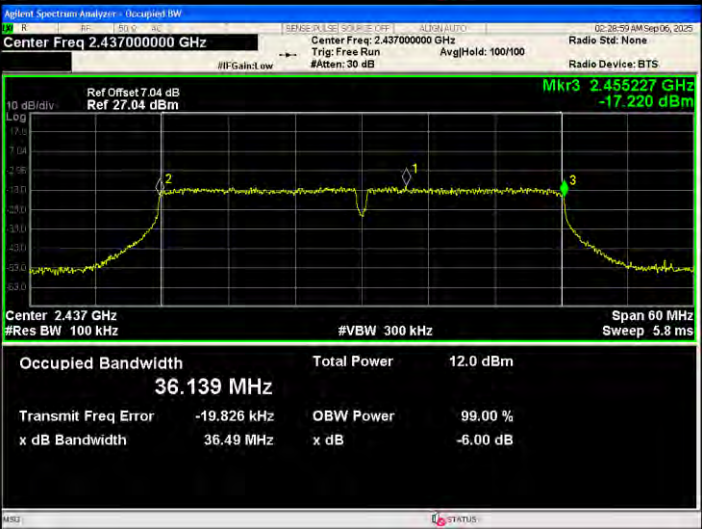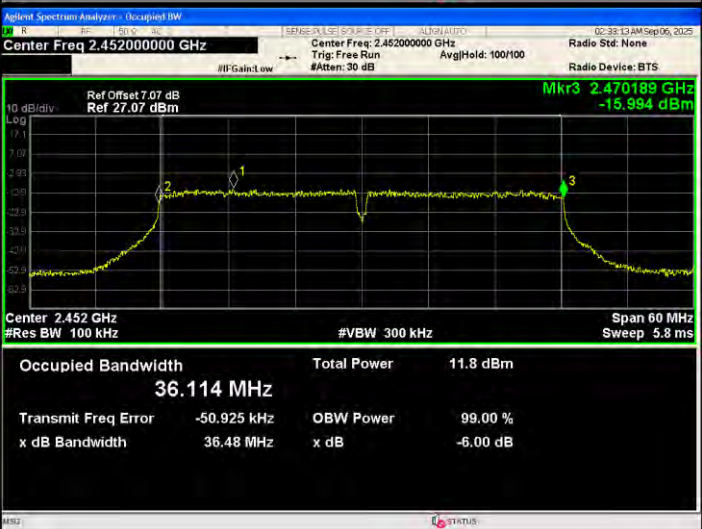802.11n(HT40) /LCH	
802.11n(HT40) /MCH	
802.11n(HT40) /HCH	

802.11ax(HE20)
/LCH

802.11ax(HE20)
/MCH

802.11ax(HE20)
/HCH

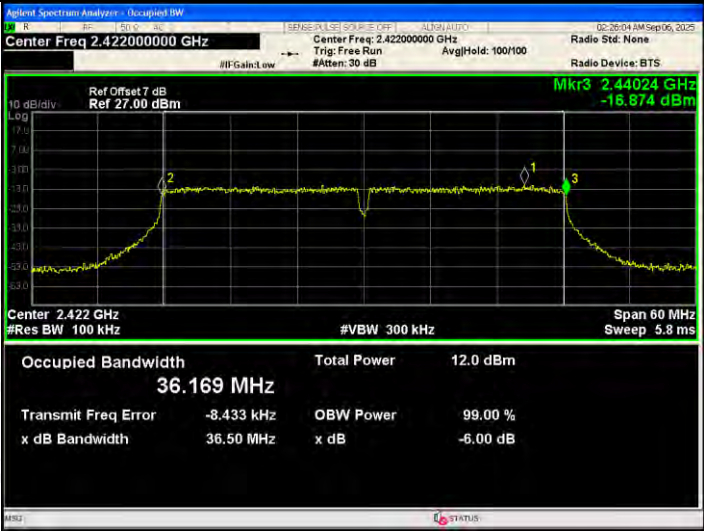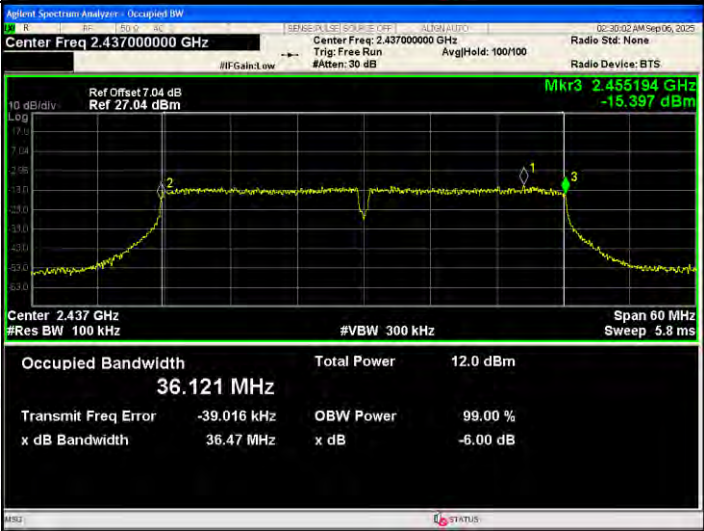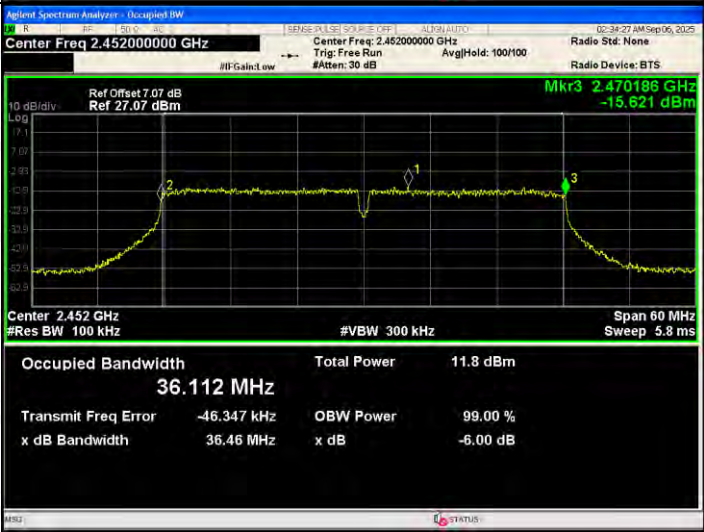
802.11ax(HE40) /LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.422000000 GHz Ref Offset 7 dB Ref 27.00 dBm Mkr3 2.44024 GHz -16.874 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.169 MHz Total Power 12.0 dBm Transmit Freq Error -8.433 kHz OBW Power 99.00 % x dB Bandwidth 36.50 MHz x dB -6.00 dB
802.11ax(HE40) /MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.455194 GHz -15.397 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.121 MHz Total Power 12.0 dBm Transmit Freq Error -39.016 kHz OBW Power 99.00 % x dB Bandwidth 36.47 MHz x dB -6.00 dB
802.11ax(HE40) /HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.452000000 GHz Ref Offset 7.07 dB Ref 27.07 dBm Mkr3 2.470186 GHz -15.621 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.112 MHz Total Power 11.8 dBm Transmit Freq Error -46.347 kHz OBW Power 99.00 % x dB Bandwidth 36.46 MHz x dB -6.00 dB


ANT2:
Test Graph:



802.11g/LCH








802.11g/MCH

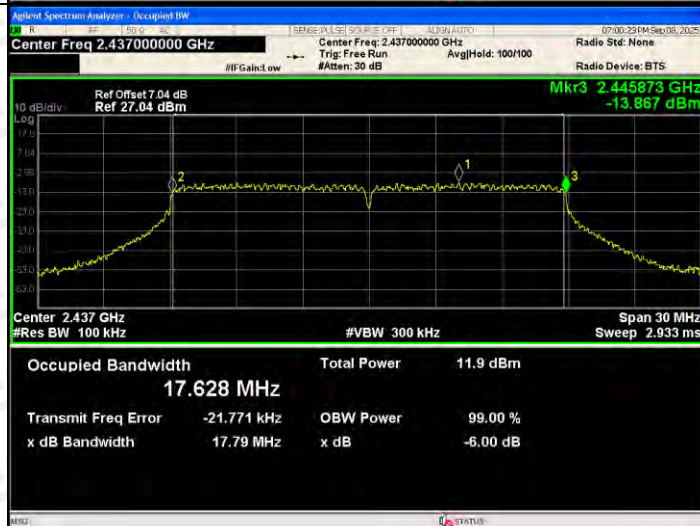

802.11g/HCH

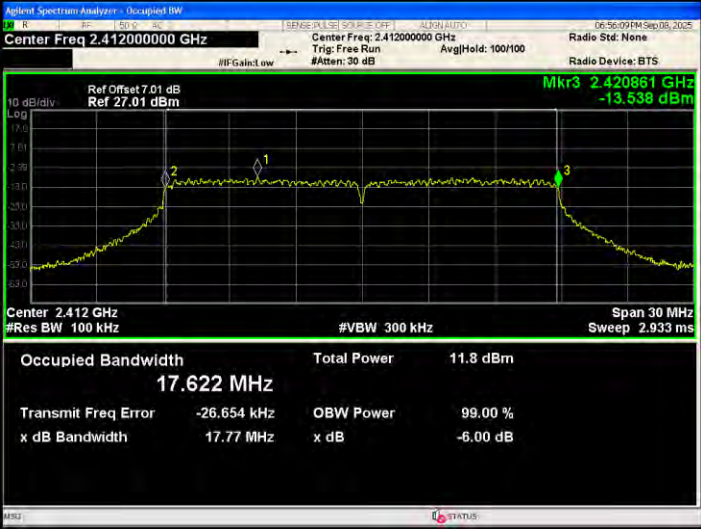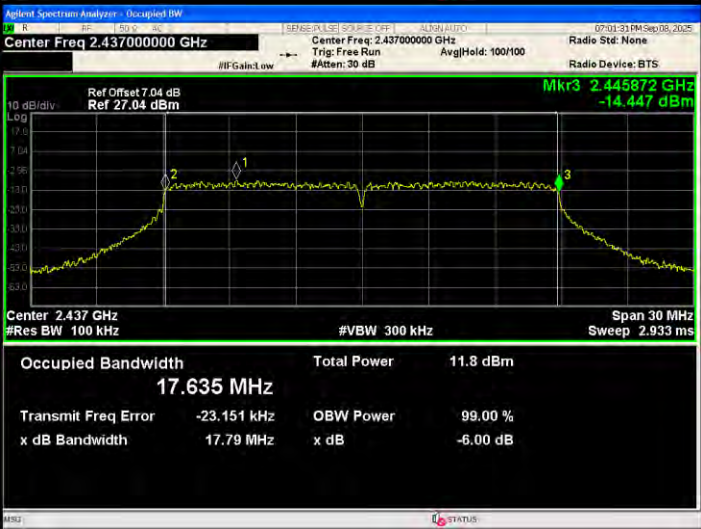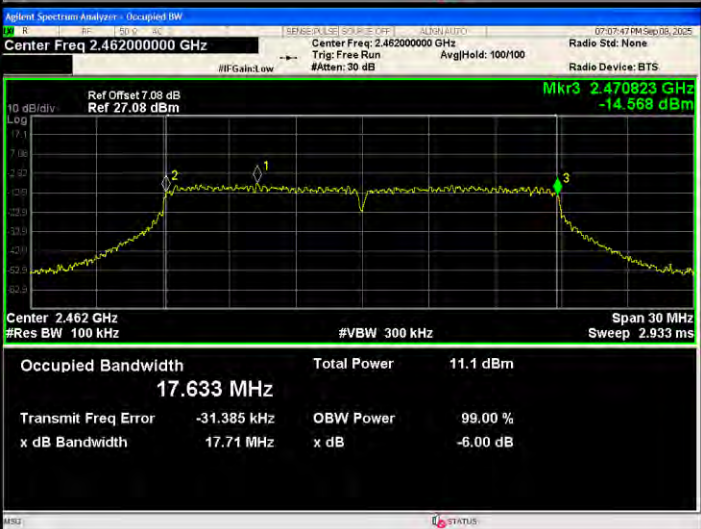



802.11n(HT20) /LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.420861 GHz -13.538 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.622 MHz Total Power 11.8 dBm Transmit Freq Error -26.654 kHz OBW Power 99.00 % x dB Bandwidth 17.77 MHz x dB -6.00 dB
802.11n(HT20) /MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.445872 GHz -14.447 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.635 MHz Total Power 11.8 dBm Transmit Freq Error -23.151 kHz OBW Power 99.00 % x dB Bandwidth 17.79 MHz x dB -6.00 dB
802.11n(HT20) /HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 7.08 dB Ref 27.08 dBm Mkr3 2.470823 GHz -14.568 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.633 MHz Total Power 11.1 dBm Transmit Freq Error -31.385 kHz OBW Power 99.00 % x dB Bandwidth 17.71 MHz x dB -6.00 dB

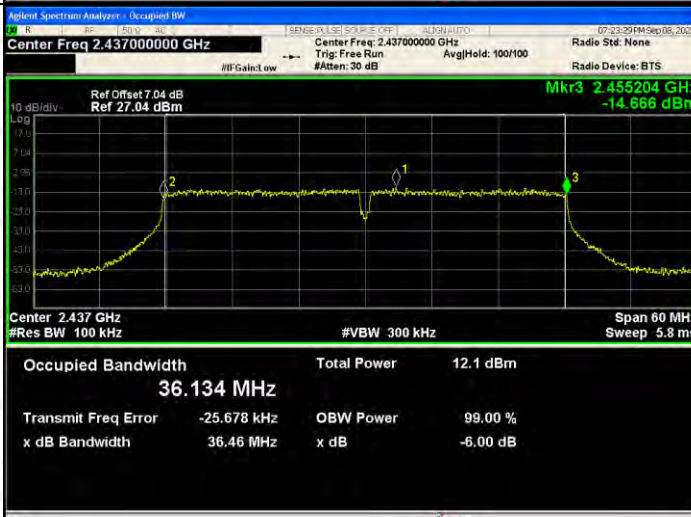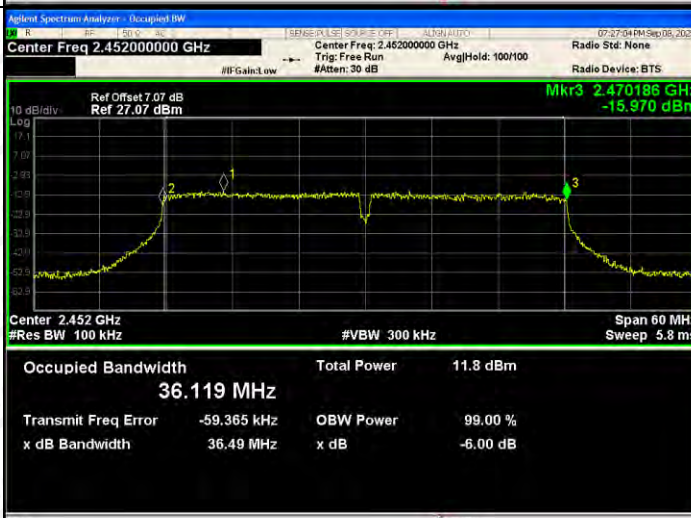802.11n(HT40) /LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.422000000 GHz Ref Offset 7 dB Ref 27.00 dBm Mkr3 2.440183 GHz -16.378 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>12.2 dBm</td></tr><tr><td>36.127 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>-32.784 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>36.43 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	12.2 dBm	36.127 MHz			Transmit Freq Error	OBW Power	99.00 %	-32.784 kHz	x dB	-6.00 dB	x dB Bandwidth			36.43 MHz		
Occupied Bandwidth	Total Power	12.2 dBm																	
36.127 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-32.784 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
36.43 MHz																			
802.11n(HT40) /MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.455204 GHz -14.666 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>12.1 dBm</td></tr><tr><td>36.134 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>-25.678 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>36.46 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	12.1 dBm	36.134 MHz			Transmit Freq Error	OBW Power	99.00 %	-25.678 kHz	x dB	-6.00 dB	x dB Bandwidth			36.46 MHz		
Occupied Bandwidth	Total Power	12.1 dBm																	
36.134 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-25.678 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
36.46 MHz																			
802.11n(HT40) /HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.452000000 GHz Ref Offset 7.07 dB Ref 27.07 dBm Mkr3 2.470186 GHz -15.970 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>11.8 dBm</td></tr><tr><td>36.119 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>-59.365 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>36.49 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	11.8 dBm	36.119 MHz			Transmit Freq Error	OBW Power	99.00 %	-59.365 kHz	x dB	-6.00 dB	x dB Bandwidth			36.49 MHz		
Occupied Bandwidth	Total Power	11.8 dBm																	
36.119 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-59.365 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
36.49 MHz																			

802.11ax(HE20)
/LCH


802.11ax(HE20)
/MCH

802.11ax(HE20)
/HCH

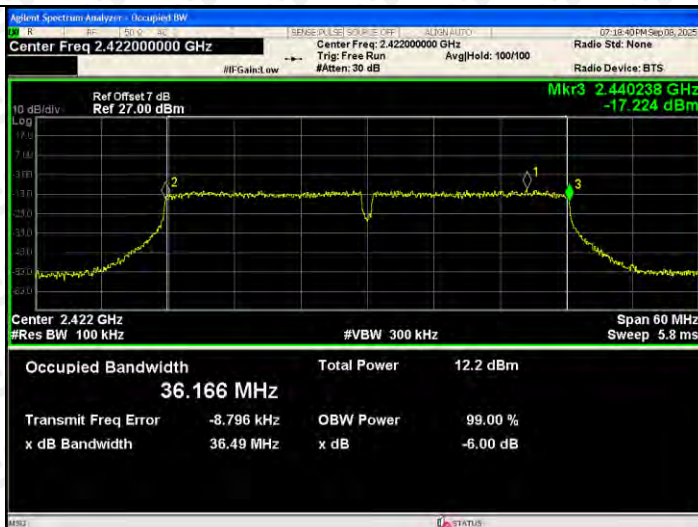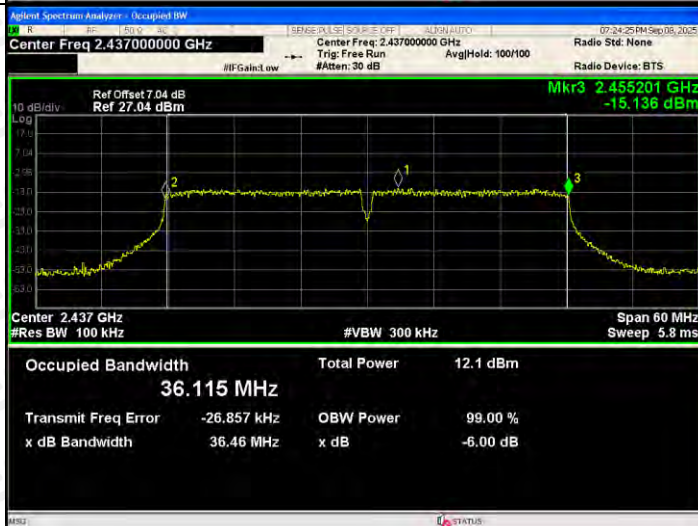
802.11ax(HE40)
/LCH

802.11ax(HE40)
/MCH

802.11ax(HE40)
/HCH

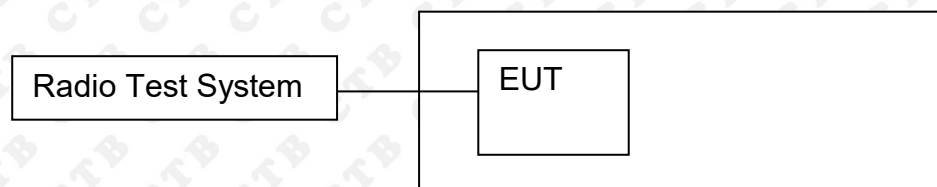
11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup



11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3kHz)	2400-2483.5	PASS


11.3 Test procedure


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3kHz] ANT 1	Power Spectral Density [dBm /3kHz]] ANT 2	Power Spectral Density [dBm /3kHz]Total	Limit(dBm)
802.11b	LCH	-20.547	-20.187	/	8
	MCH	-20.512	-20.081	/	8
	HCH	-21.16	-20.954	/	8
802.11g	LCH	-21.885	-21.813	/	8
	MCH	-21.779	-21.642	/	8
	HCH	-22.381	-22.371	/	8
802.11n (HT20)	LCH	-21.81	-21.852	-18.821	8
	MCH	-21.923	-21.637	-18.767	8
	HCH	-22.439	-22.311	-19.364	8
802.11n (HT40)	LCH	-23.266	-23.307	-20.276	8
	MCH	-23.668	-23.51	-20.578	8
	HCH	-23.681	-23.906	-20.782	8
802.11ax (HE20)	LCH	-21.783	-21.465	-18.611	8
	MCH	-21.634	-21.583	-18.598	8
	HCH	-22.381	-22.43	-19.395	8
802.11ax (HE40)	LCH	-23.817	-23.348	-20.566	8
	MCH	-23.364	-23.149	-20.245	8
	HCH	-23.708	-23.244	-20.460	8

ANT1:
Test Graph

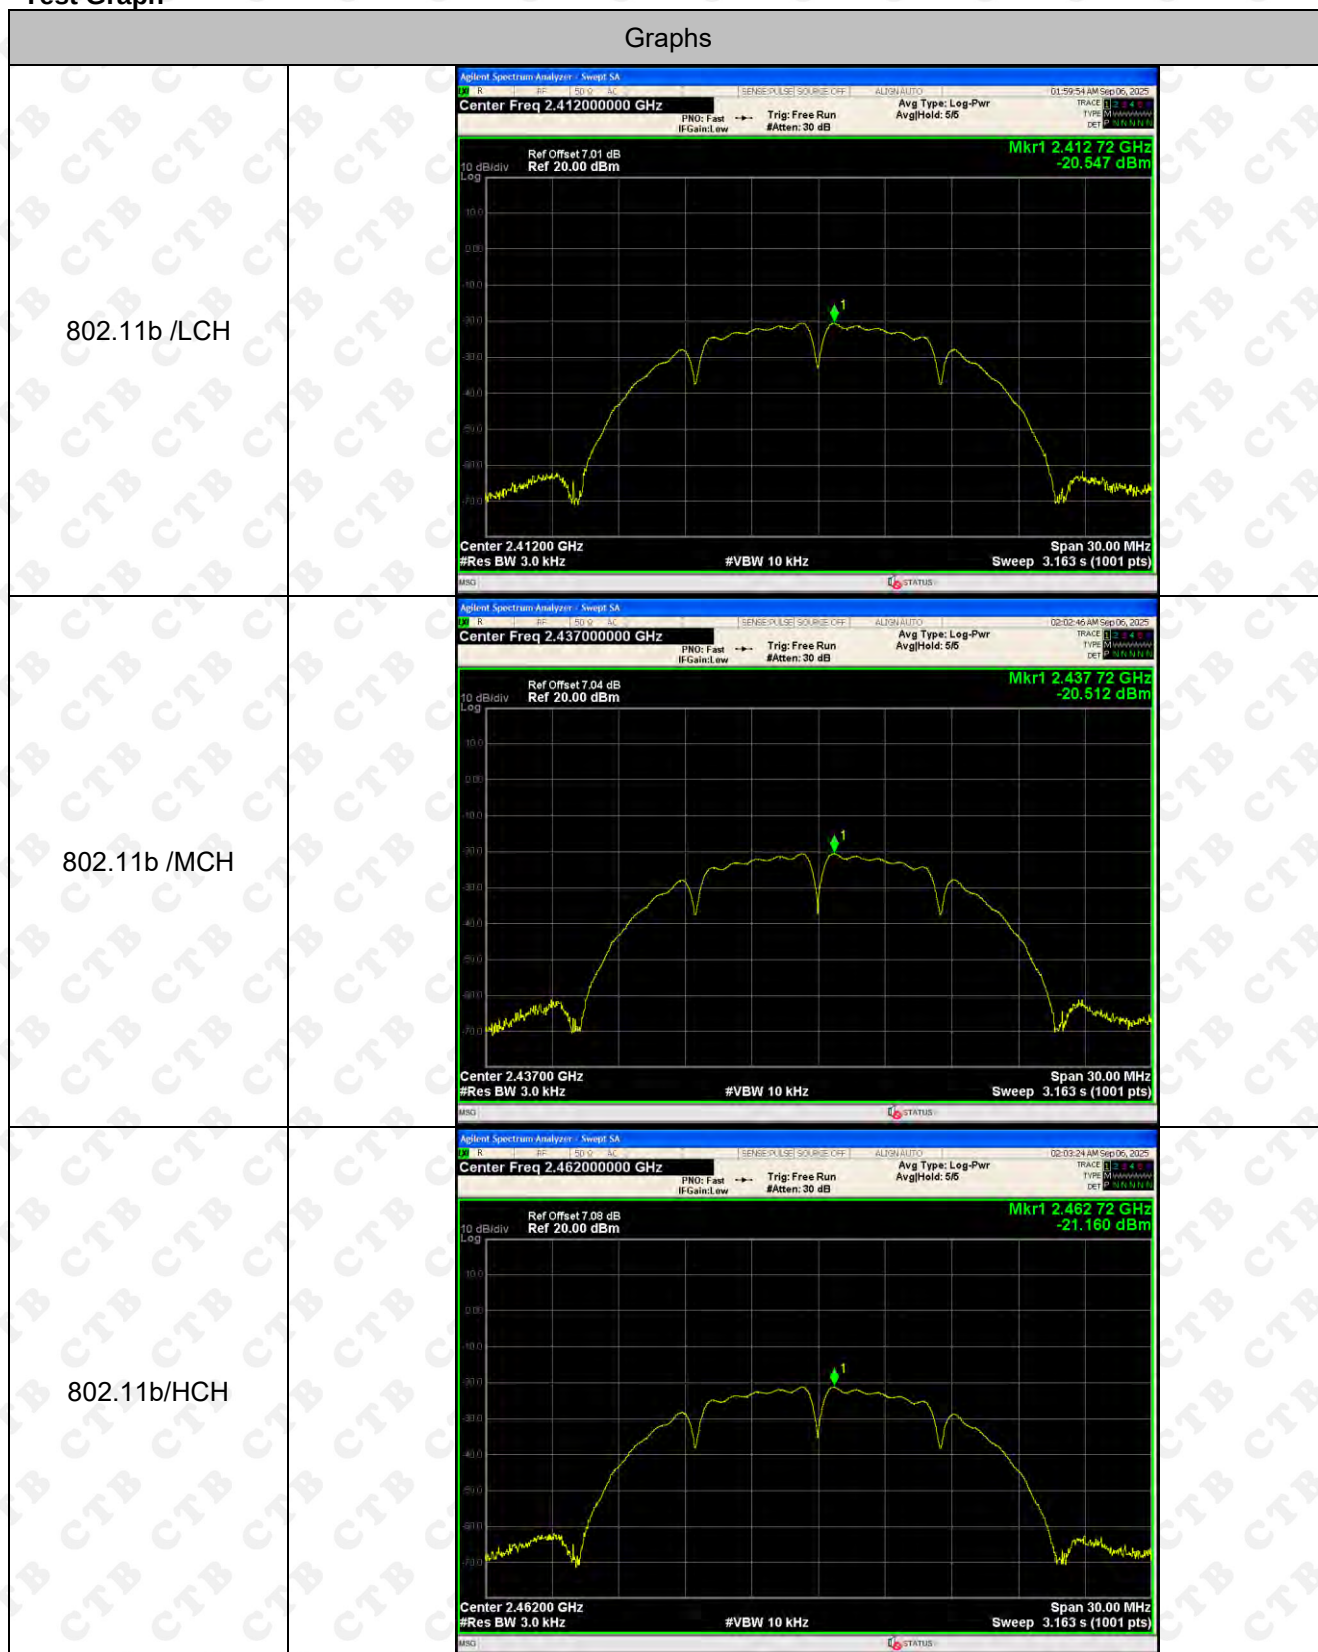

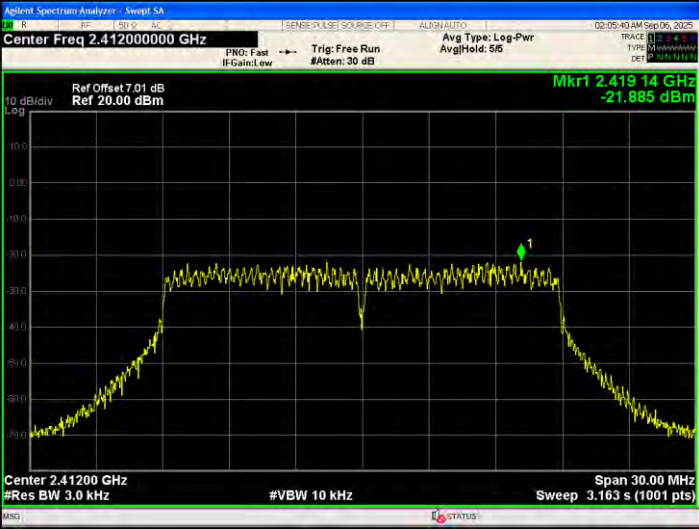802.11g/LCH	
802.11g/MCH	
802.11g/HCH	

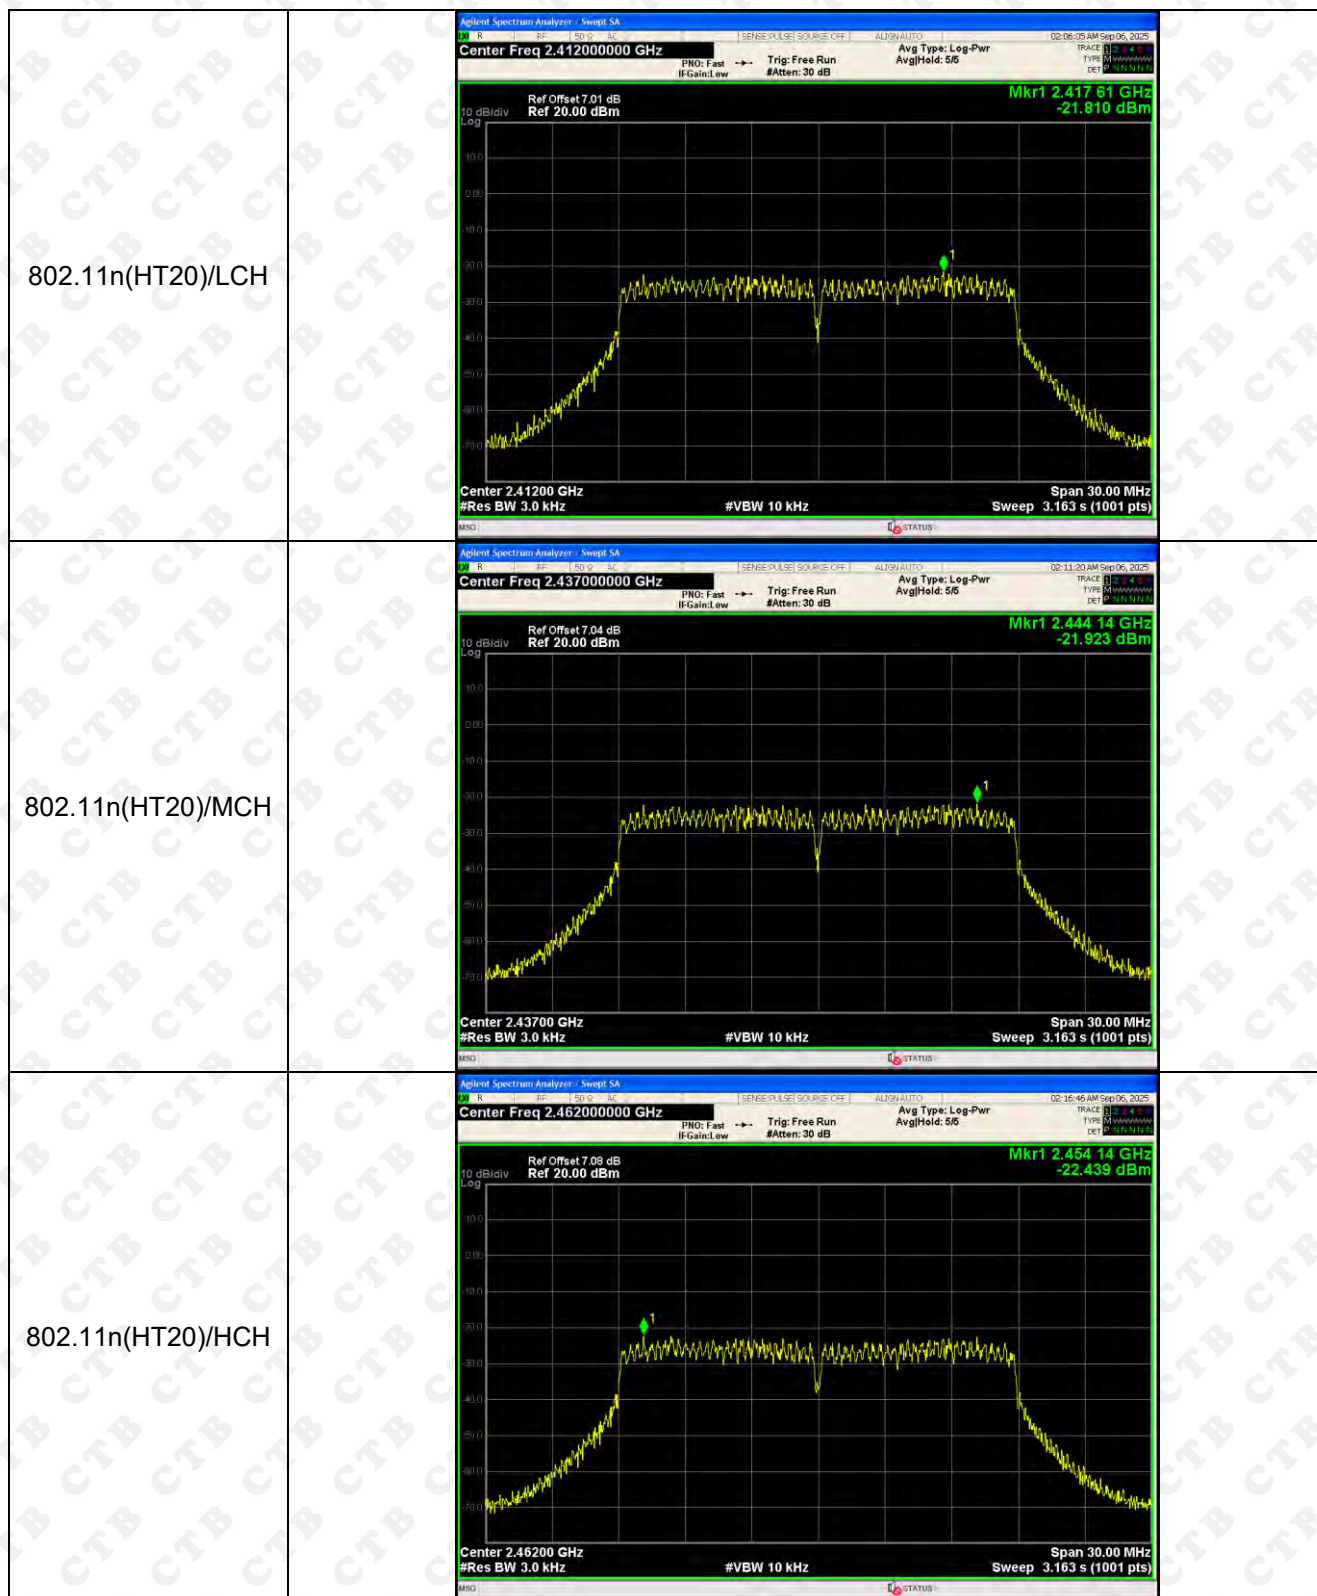

802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.422000000 GHz Ref Offset 7.4 dB Ref 20.00 dBm Mkr1 2.41882 GHz -23.266 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.437000000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.44008 GHz -23.668 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.452000000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.44882 GHz -23.681 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 6.326 s (1001 pts)

802.11ax(HE20)
/LCH



802.11ax(HE20)
/MCH



802.11ax(HE20)
/HCH



802.11ax(HE40)
/LCH




802.11ax(HE40)
/MCH




802.11ax(HE40)
/HCH



ANT 2:
Test Graph

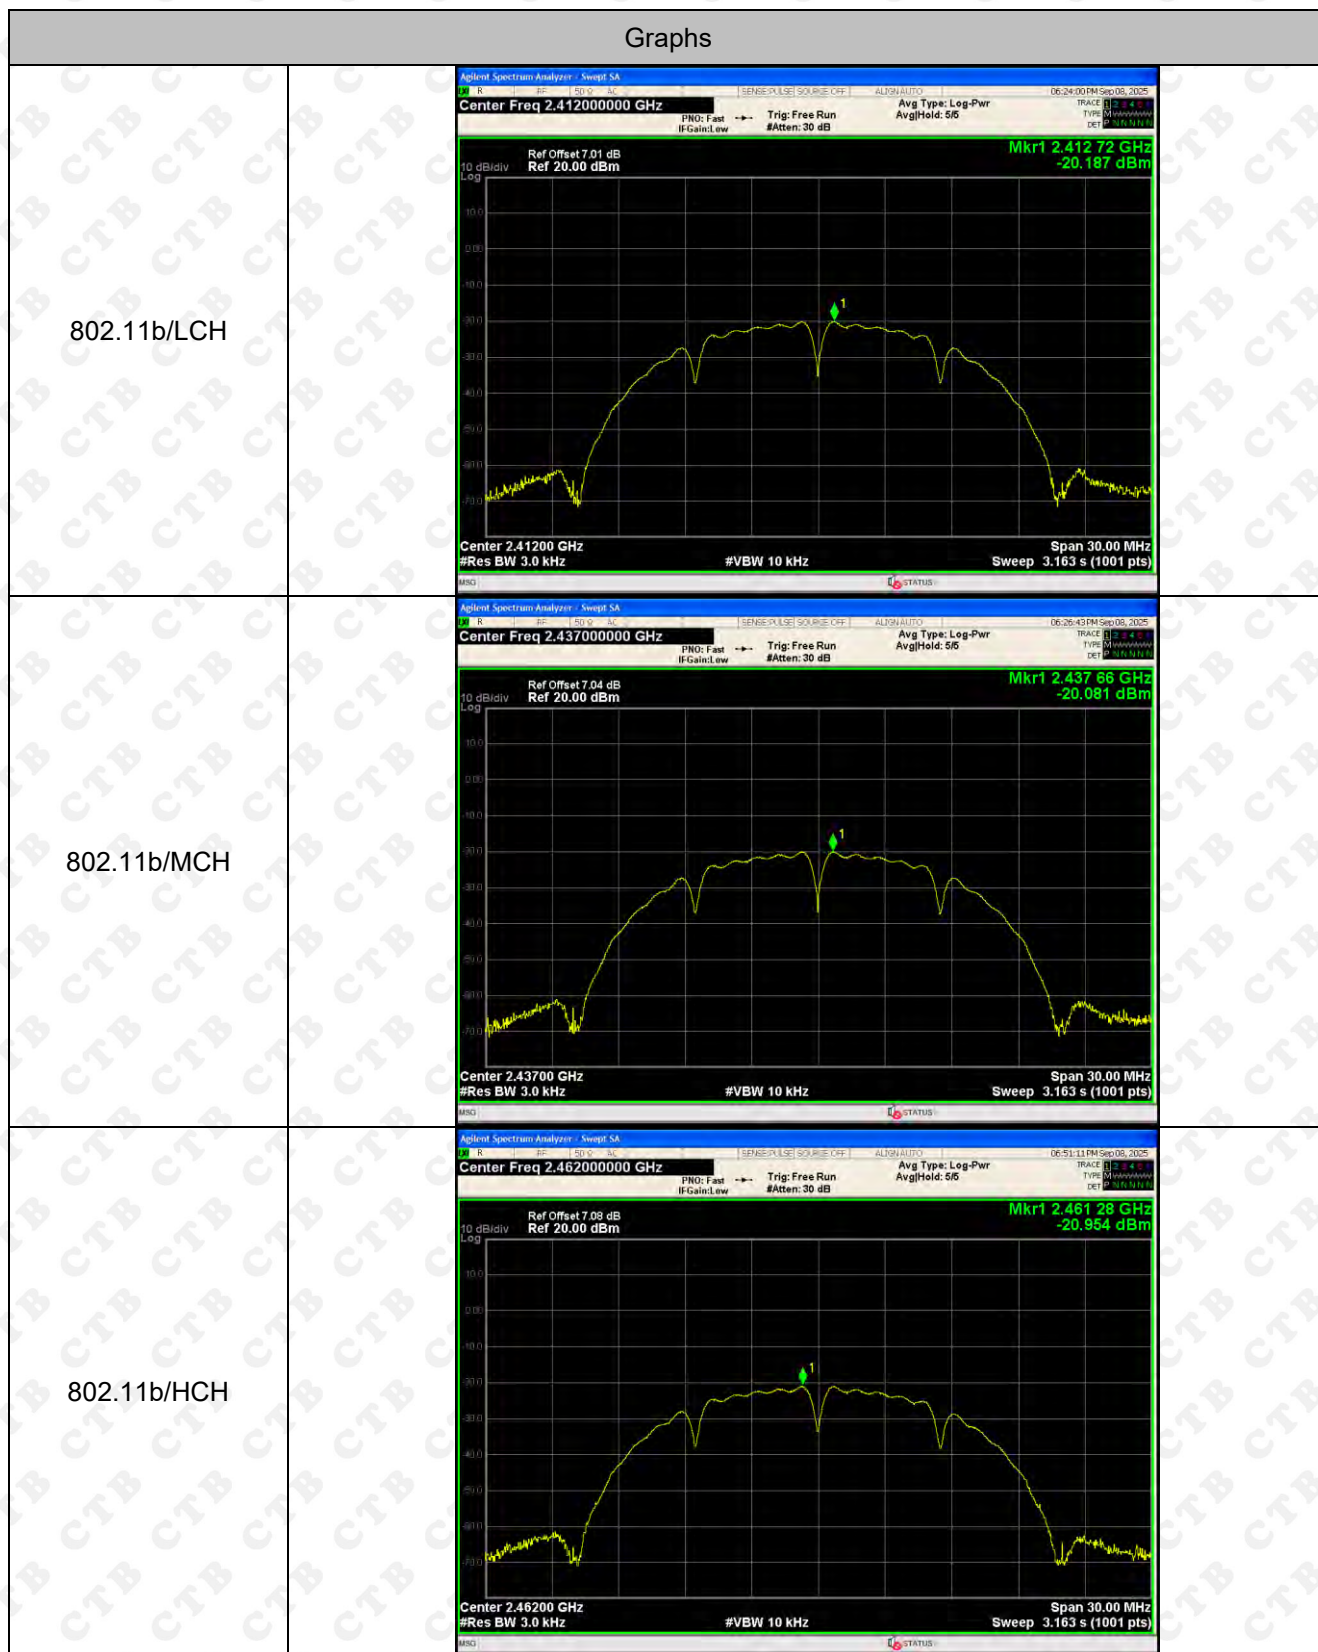


802.11g/LCH	
802.11g/MCH	
802.11g/HCH	

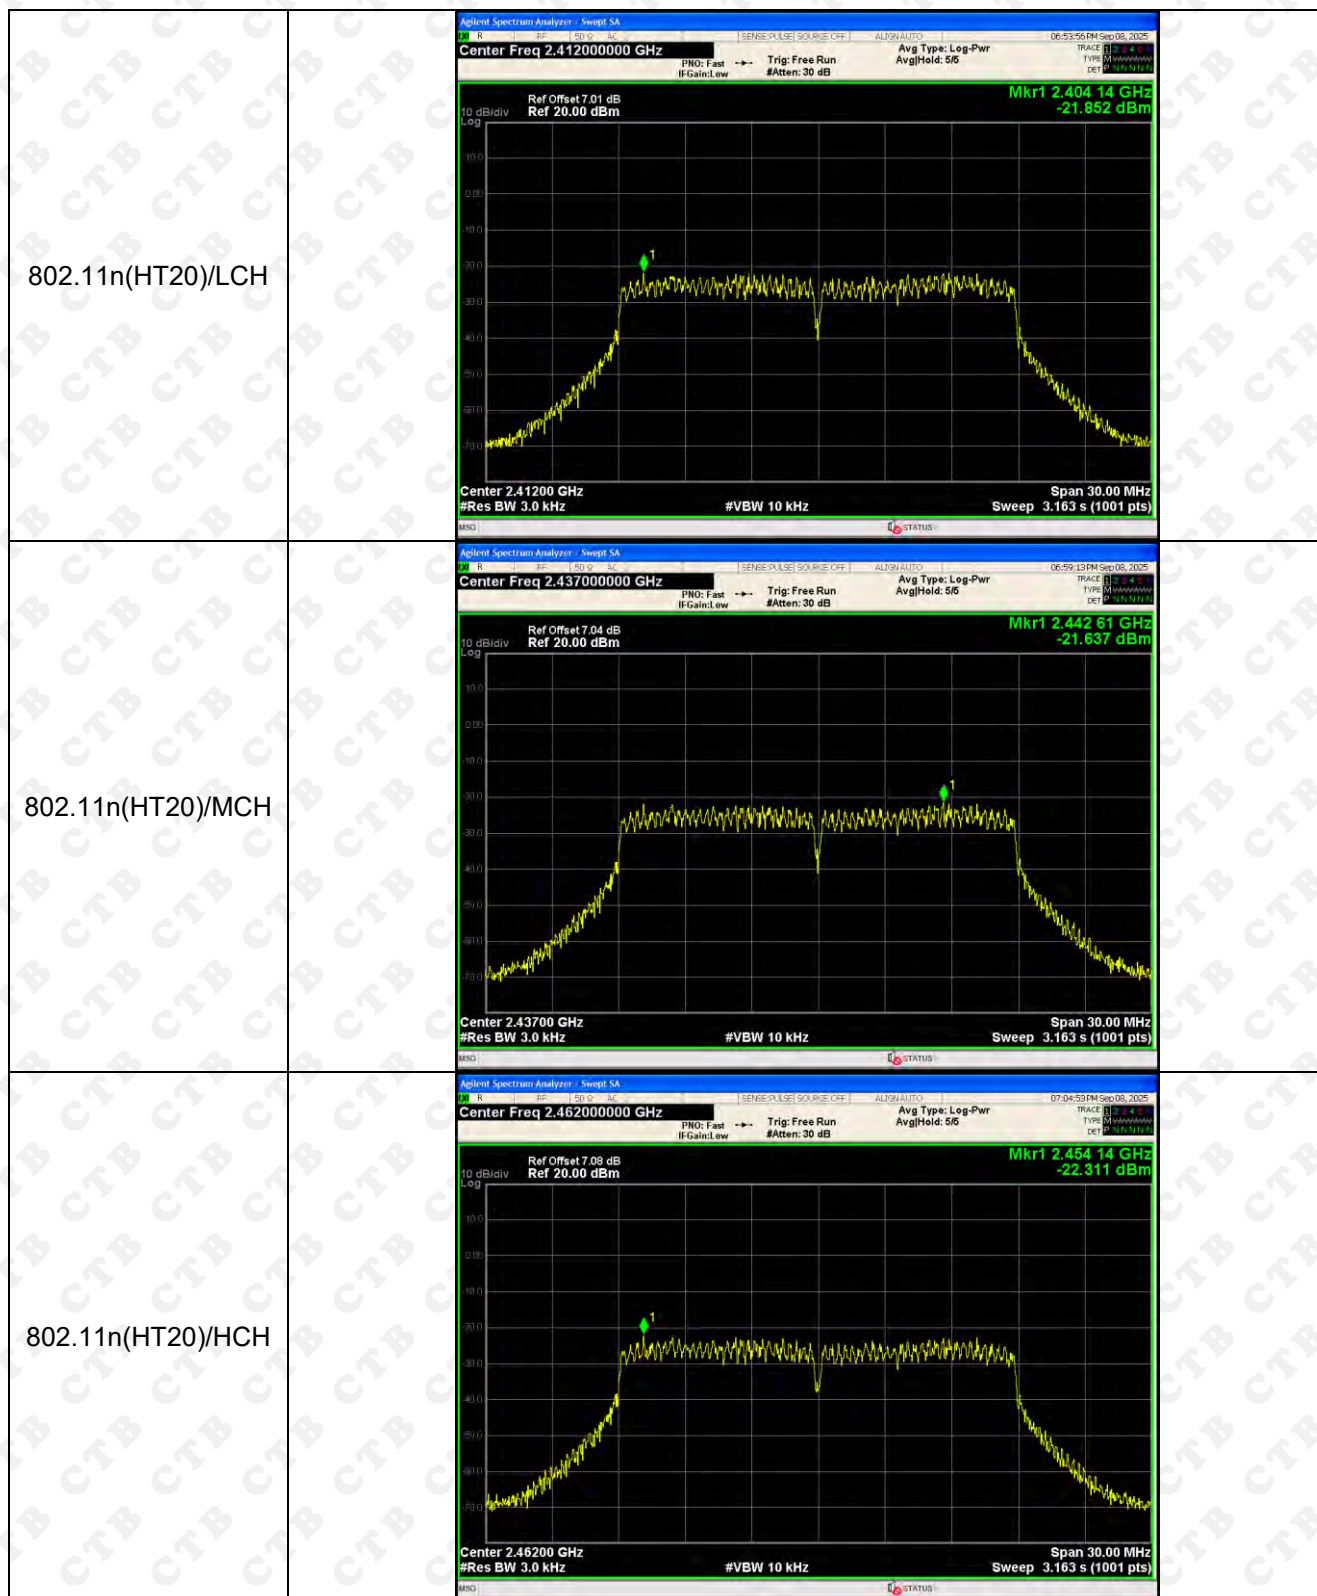

802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.422000000 GHz Ref Offset 7 dB Ref 20.00 dBm Mkr1 2.436 34 GHz -23.307 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.437000000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.433 82 GHz -23.510 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.452000000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.448 82 GHz -23.906 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

802.11ax(HE20) /LCH	
802.11ax(HE20) /MCH	
802.11ax(HE20) /HCH	

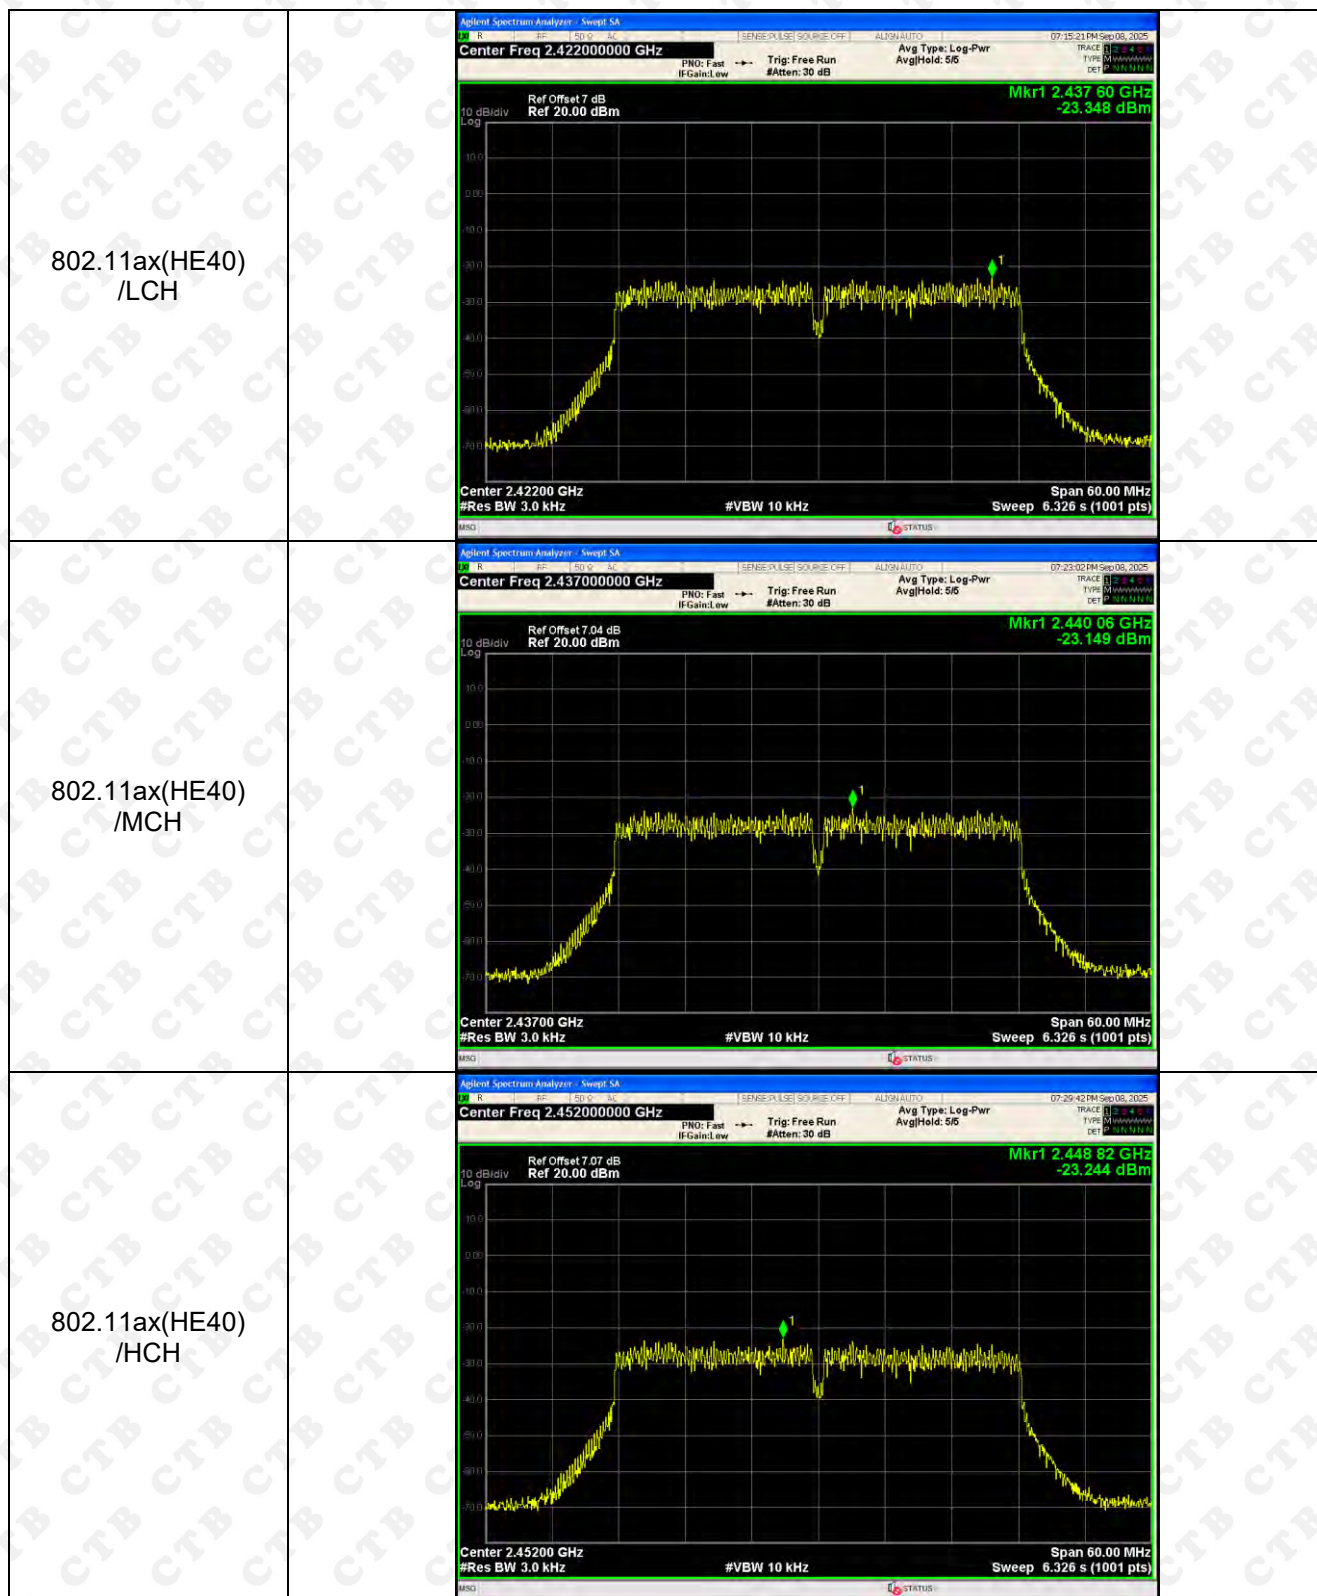

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is Internal antenna and no consideration of replacement. The best case gain of the antenna is

Ant1: 2.47dBi, Ant2: 2.47dBi

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emissions

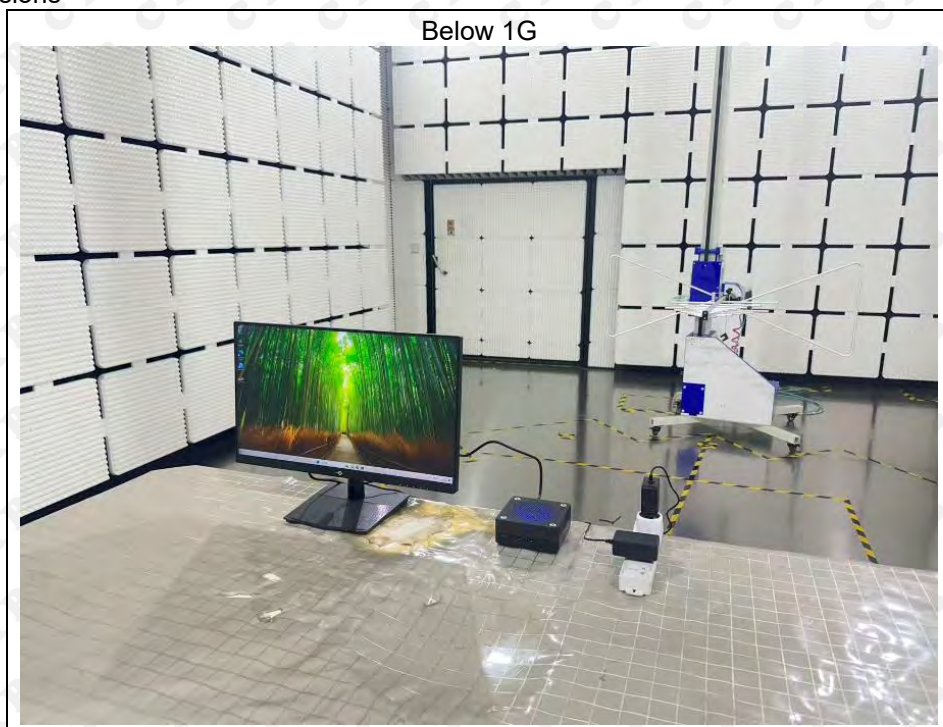

Conducted emission



***** END OF REPORT *****