

Antenna Sample Datasheet

entry name:	NF038
Material category:	BT antenna
Antenna Material	FPC+ coaxial line
Date:	2025.10.10

Contents


1: Antenna test equipment.....	1
2: Passive test report.....	3
3: Matching circuit.....	5
4: Structural drawing.....	6

1: Antenna test equipment

List of meters: Agilent 5071B;



1.1 The principle diagram of the ETS anechoic chamber

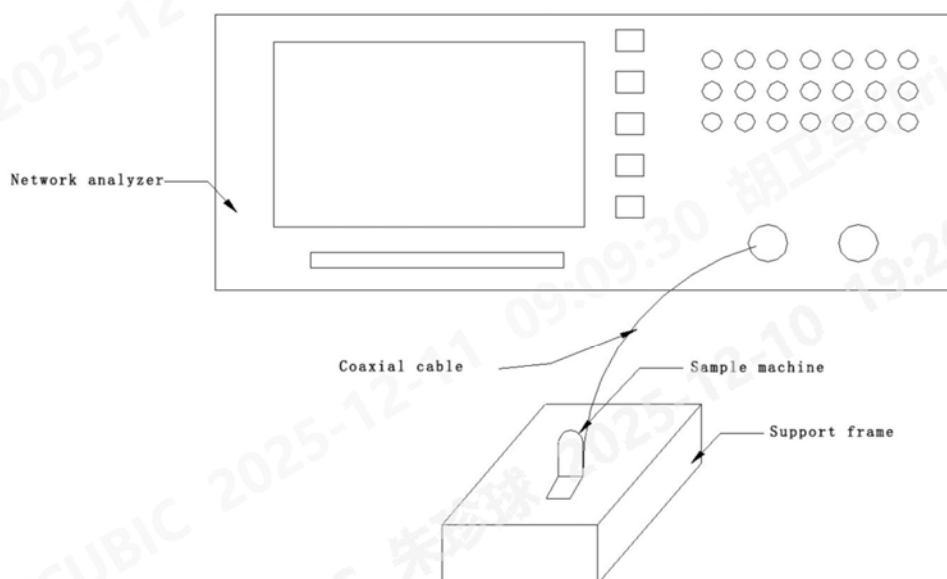

Picture1. Antenna static test connection method

1.2 Pictures of the ETS anechoic chamber



Inside the ETS anechoic chamber



Test Machine


Address: 12th Floor, West Block B, Building 8, Huaqiang Creative Industry Park, Sightseeing Road, Guangming District, Shenzhen

Telephone number: 0755-28700082

www.honant.com.cn

2: Passive test report


2.1: BT antenna S11 parameters

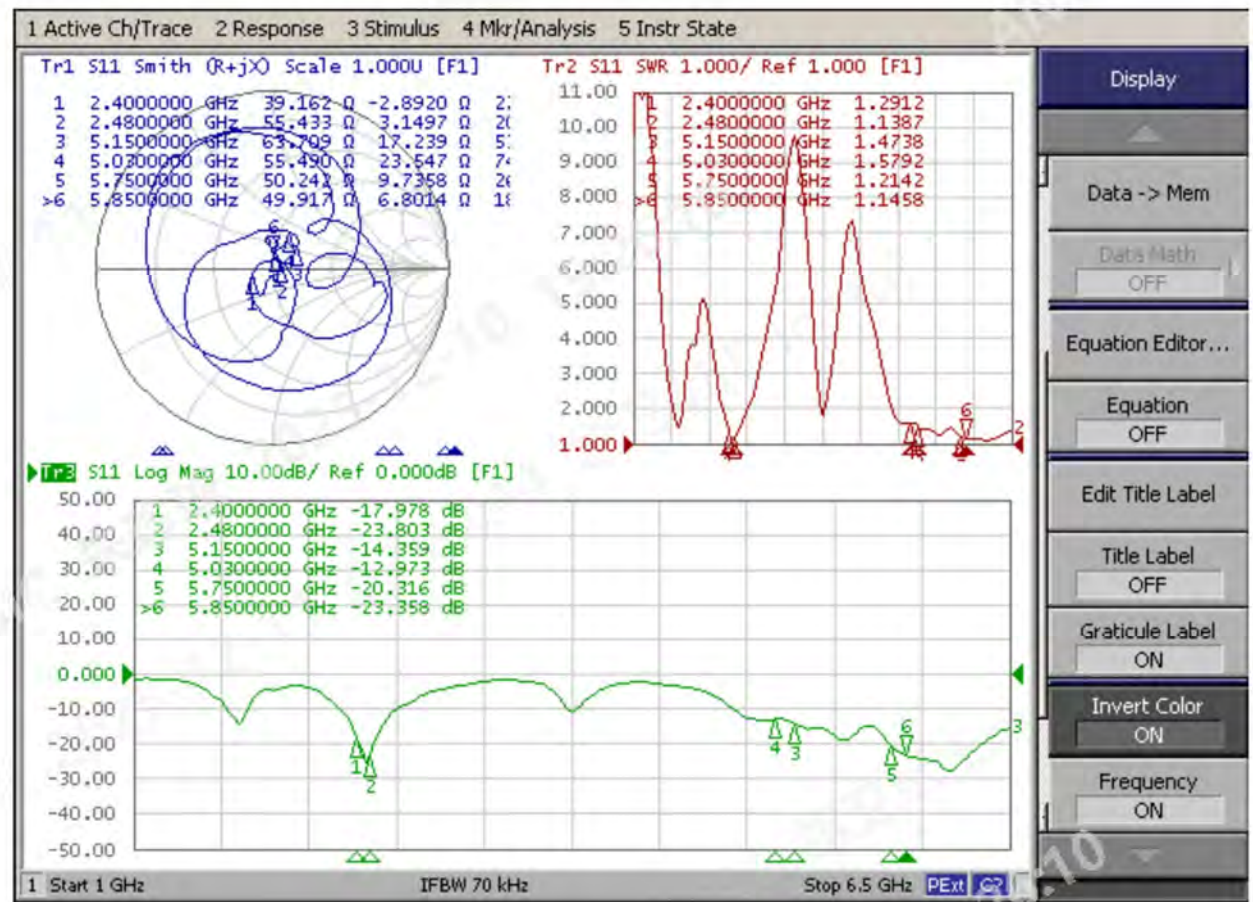

2.2: 2.4G Passive efficiency of antenna

Freq (MHz)	Gain (dBi)	Efficiency (%)
2400	1.92	42.69
2410	2.15	41.71
2420	2.64	42.91
2430	2.83	42.84
2440	3.13	42.21
2450	2.44	42.04
2460	2.97	42.35
2470	3.12	46.07
2480	3.05	46.18
2490	2.77	45.63
2500	2.55	44.95

2.3: 2.4G Passive pattern of BT antenna

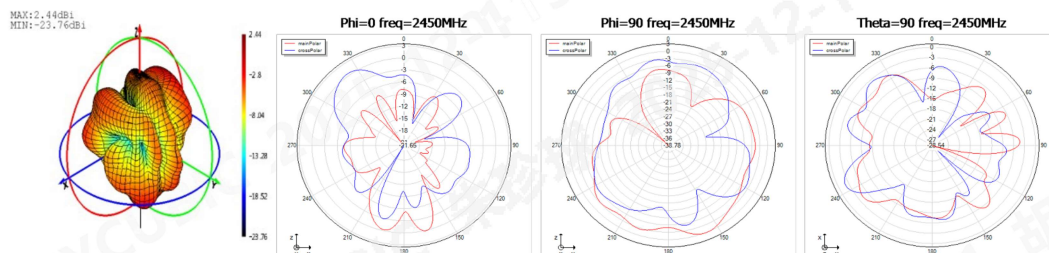

Address: 12th Floor, West Block B, Building 8, Huaqiang Creative Industry Park, Sightseeing Road, Guangming District, Shenzhen


Telephone number: 0755-28700082

www.honant.com.cn

2.4: 5G Passive efficiency of antenna

Freq (MHz)	Gain (dBi)	Efficiency (%)
5150	5.92	55.17
5200	5.17	50.48
5250	6.22	62.17
5300	5.94	55.33
5350	5.87	55.65
5400	6.14	54.01
5450	6.38	57.26
5500	6.80	56.43
5550	7.36	63.03
5600	7.24	60.93
5650	7.01	57.52
5700	6.57	54.44
5750	6.89	56.45
5800	7.18	63.13
5850	6.74	62.75

2.3: 5G Passive pattern of BT antenna

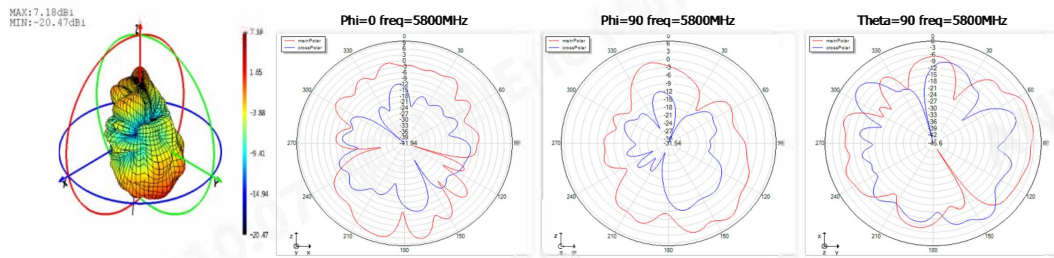

3: Structural drawing

