

DFS Test Report

Applicant : Foxtron Vehicle Technologies Co., Ltd.
Product Name : 5G T-Box
Trade Name : FOXTRON
Model Number : T99A674
Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2020
Received Date : Jun. 23, 2025
Test Period : Jul. 24, 2025 ~ Aug. 25, 2025
Issued Date : Feb. 10, 2026

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Bade test site :

Test Firm Registration Number: 226252

Test Firm Designation Number: TW0010

Wugu test site :

Test Firm Registration Number: 191812

Test Firm Designation Number: TW0034

Note:

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Rev.	Issued Date	Description	Revised By
00	Feb. 10, 2026	Initial Issue	Abby Hsu

Verification of Compliance

Applicant : Foxtron Vehicle Technologies Co., Ltd.

Product Name : 5G T-Box

Trade Name : FOXTRON

Model Number : T99A674

FCC ID : 2BOWH-5GTBOX1

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2020

Test Result : Complied

Issued By : Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By

: Kai Yu Yang

TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result	5
1.2.	Testing Location	6
1.3.	Measurement Uncertainty	6
1.4.	Test Site Environment.....	6
2	EUT Description.....	7
3	Test Methodology	9
3.1.	Mode of Operation.....	9
3.2.	EUT Test Step	9
3.3.	Test Instruments	10
4	Dynamic Frequency Selection	11
4.1.	Limits	11
4.2.	Test and Measurement System	15
5	Test Results	18
5.1.	Radar Waveforms and Traffic	18
5.2.	Channel Loading	31
5.3.	Channel Availability Check Time.....	34
5.4.	Channel Move Time and Channel Closing Transmission Time.....	37
5.5.	Non-Occupancy Period	40
5.6.	U-NII Detection Bandwidth	41
5.7.	Statistical Performance check	44

Appendix A. Test Setup Photographs

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.407(h)(2)	Channel Availability Check Time	PASS	---
15.407(h)(2)	Channel Move Time	PASS	---
15.407(h)(2)	Channel Closing Transmission Time	PASS	---
15.407(h)(2)	Non-Occupancy Period	PASS	---
15.407(h)(2)	U-NII Detection Bandwidth	PASS	---
15.407(h)(2)	Statistical Performance check	PASS	---

Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
Canada RSS-247 Issue 4	RSS-247 — Digital Transmission Systems, Frequency Hopping Systems and Licence-Exempt Local Area Network Devices in 902-928 MHz, 2400-2483.5 MHz, 5150-5350 MHz, and 5470-5895 MHz bands
ANSI C63. 10: 2020	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033: D02 v02r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address: ☐ No. 140-1, Changan Street, Bade District, Taoyuan City, Taiwan (R.O.C.)

Site Address: ☒ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

1.3. Measurement Uncertainty

Test Item	Uncertainty	
	BD	WG
Conducted	1.8 dB	1.8 dB

1.4. Test Site Environment

Items	Required (IEC 60068-1)	Interval(*)
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75

(*)The measurement ambient temperature is within this range.

2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity

Applicant	Foxtron Vehicle Technologies Co., Ltd. 6F, No. 26, Baogao Rd., Xindian Dist., New Taipei City 231029, Taiwan (R.O.C.)				
Product Name	5G T-Box				
Trade Name	FOXTRON				
Model Number	T99A674				
FCC ID	2BOWH-5GTBOX1				
Operate Frequency	Frequency Band			Frequency Range (MHz)	
	802.11a	U-NII Band 2-A		5260 – 5320	
		U-NII Band 2-C		5500 – 5700	
	802.11n HT20/ 802.11ac VHT20/ 802.11ax HE20	U-NII Band 2-A		5260 – 5320	
		U-NII Band 2-C		5500 – 5700	
	802.11n HT40/ 802.11ac VHT40/ 802.11ax HE40	U-NII Band 2-A		5270 – 5310	
		U-NII Band 2-C		5510 – 5670	
	802.11ac VHT80/ 802.11ax HE80/	U-NII Band 2-A		5290	
		U-NII Band 2-C		5530 –5610	
	802.11ac VHT160/ 802.11ax HE160/	U-NII Band 2-A		5250	
U-NII Band 2-C		5570			
Modulation Type	OFDM/OFDMA				
Antenna information	Antenna	Model	Type	Max. Gain (dBi)	
	WIFI 1 (ANT-0)	T99A714	PIFA antenna	U-NII Band 2-A	3.33
				U-NII Band 2-C	3.73
	WIFI 2 (ANT-1)	T99A714	PIFA antenna	U-NII Band 2-A	3.14
				U-NII Band 2-C	3.72
Antenna Delivery	802.11a : 2TX (CDD) 802.11n / ac / ax: 2TX (MIMO)				
Operate Temp. Range	-40 ~ +85 °C				
EUT Power Rating	12 Vdc, 3 A				

Testing Sample No.	
Test Item	Sample Number
Normal	C256330_A010 / A011

Items	Description	
Communication Mode	☒ IP Based (Load Based)	☐ Frame Based
TPC Function	☐ With TPC	☒ Without TPC
Weather Band (5600 ~ 5650 MHz)	☒ With 5600 ~ 5650 MHz	☐ Without 5600 ~ 5650 MHz
Beamforming Function	☐ With Beamforming	☒ Without Beamforming
Equipment Type	☐ Outdoor access point	
	☐ Indoor access point	
	☐ Fixed point-to-point access points	
	☒ Client devices	
Operating mode	☒ Master (Hotspot)	
	☐ Client with radar detection	
	☒ Client without radar detection	
	☐ Ad-Hoc	
	☐ Bridge	
	☐ MESH	

Note : DFS controls (hardware or software) related to radar detection are NOT accessible to the user.
Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

3 Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.10-2020, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

The tests documented in this report were performed in accordance with FCC KDB request:

- FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
- FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
802.11ax HE20
802.11ax HE40
802.11ax HE80

802.11ax HE20:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5300 MHz.

802.11ax HE40:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5310 MHz.

802.11ax HE80:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5290 MHz.

3.2. EUT Test Step

1.	Setup the EUT shown on 3.2.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function link to Access Point.
4.	The EUT is operated in the normal mode to the purposes of measurement.

3.3. Test Instruments

For Conducted
Test Period: Jul. 24, 2025 ~ Aug. 25, 2025
Testing Engineer: Sandy Yang

Test Site		RF02-WG				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY63460164	Mar. 4, 2025	1 year
☒	Spectrum Analyzer (10 Hz~44 GHz)	R&S	FSV3044	101416	Oct. 29, 2024	1 year
☒	Signal Generator	R&S	SMM100A	101740	Jan. 21, 2025	1 year

Note: N.C.R. = No Calibration Request.

4 Dynamic Frequency Selection

4.1. Limits

§15.407 (h) and FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 Compliance measurement procedures for unlicensed-national information infrastructure devcies operating in the 5250-5350 MHZ and 5470-5725 MHZ bands incorporating dynamic frequency selection.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel			
Requirement	Operational Mode		
	Master	Client (without Radar Detection)	Client (with Radar Detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation		
Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client With Radar Detection	Client without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note : Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequencies between the bonded 20 MHz channel blocks		

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	U-NII Band 2-Aalue (See Notes 1,2 and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and Power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to FCC KDB Publication 662911 D01.	

Table 4: DFS Response Requirement U-NII Band 2-Aalues

Parameter	U-NII Band 2-Aalue
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100 % of the U-NII 99 % transmission power bandwidth. See Note 3.
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 5: Short Pulse Radar Test Waveforms					
Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60 %	30
2	1-5	150-230	23-29	60 %	30
3	6-10	200-500	16-18	60 %	30
4	11-20	200-500	12-16	60 %	30
Aggregate (Radar Types 1-4)				80 %	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 5a: Pulse Repetition Intervals U-NII Band 2-Aalues for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Table 6 – Long Pulse Radar Test Signal


Radar Waveform	Bursts	Pulses per Burst	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80 %	30

Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (μsec)	PRI (μsec)	Burst Length (ms)	Pulses per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.333	70 %	30

4.2. Test and Measurement System

4.2.1. Setup for Master with injection at the Master

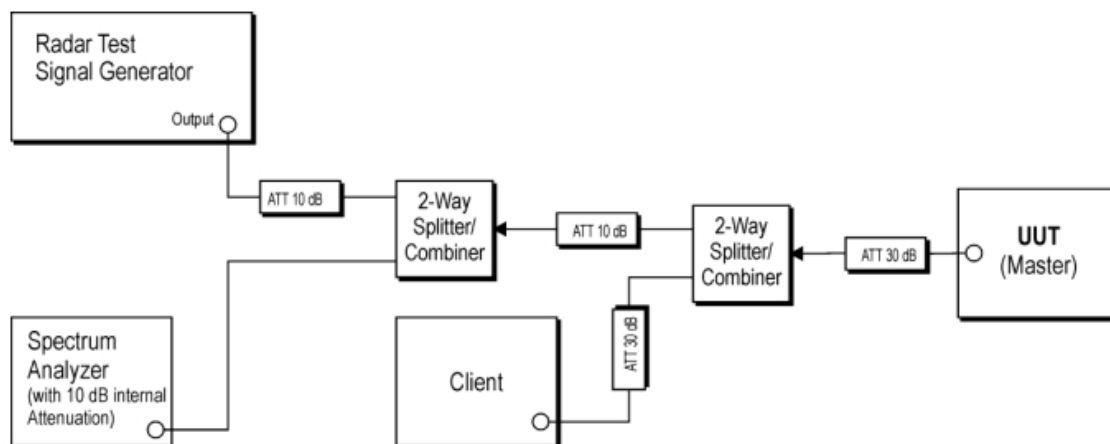


Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	ID
1.	5G T-Box	Cloud Network Technology Singapore Pte. Ltd.	T99A674	FCC : 2BOWH-5GTBOX1

4.2.2. Setup for Client with injection at the Master

Example Radiated Setup where UUT is a Client and Radar Test Waveforms are injected into the Master

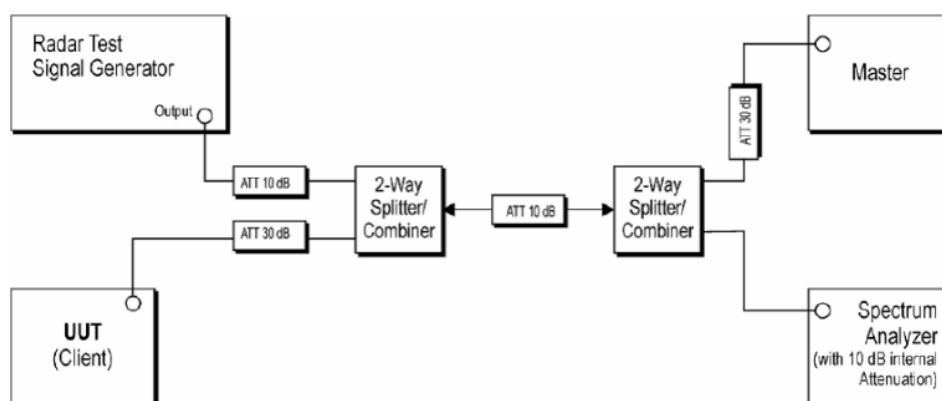

Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	ID
1.	Access Point	ASUS	RT-BE96U	FCC : MSQ-RTBE6G00

4.2.3. System Calibration

The short pulse types 0,1,2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time. The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the May 2014 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

4.2.4. System Calibration

The Interference Radar Detection Threshold Level is (-63 dBm). The above equipment setup was used to calibrate the radiated Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50 ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (U-NII Band 2-ABW) were set to at least 3 MHz.


The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was (-63 dBm). Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.

4.2.5. Adjustment of Displayed Traffic Level

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. Software to ping the client is permitted to simulate data transfer but must have random ping intervals. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.


5 Test Results

5.1. Radar Waveforms and Traffic

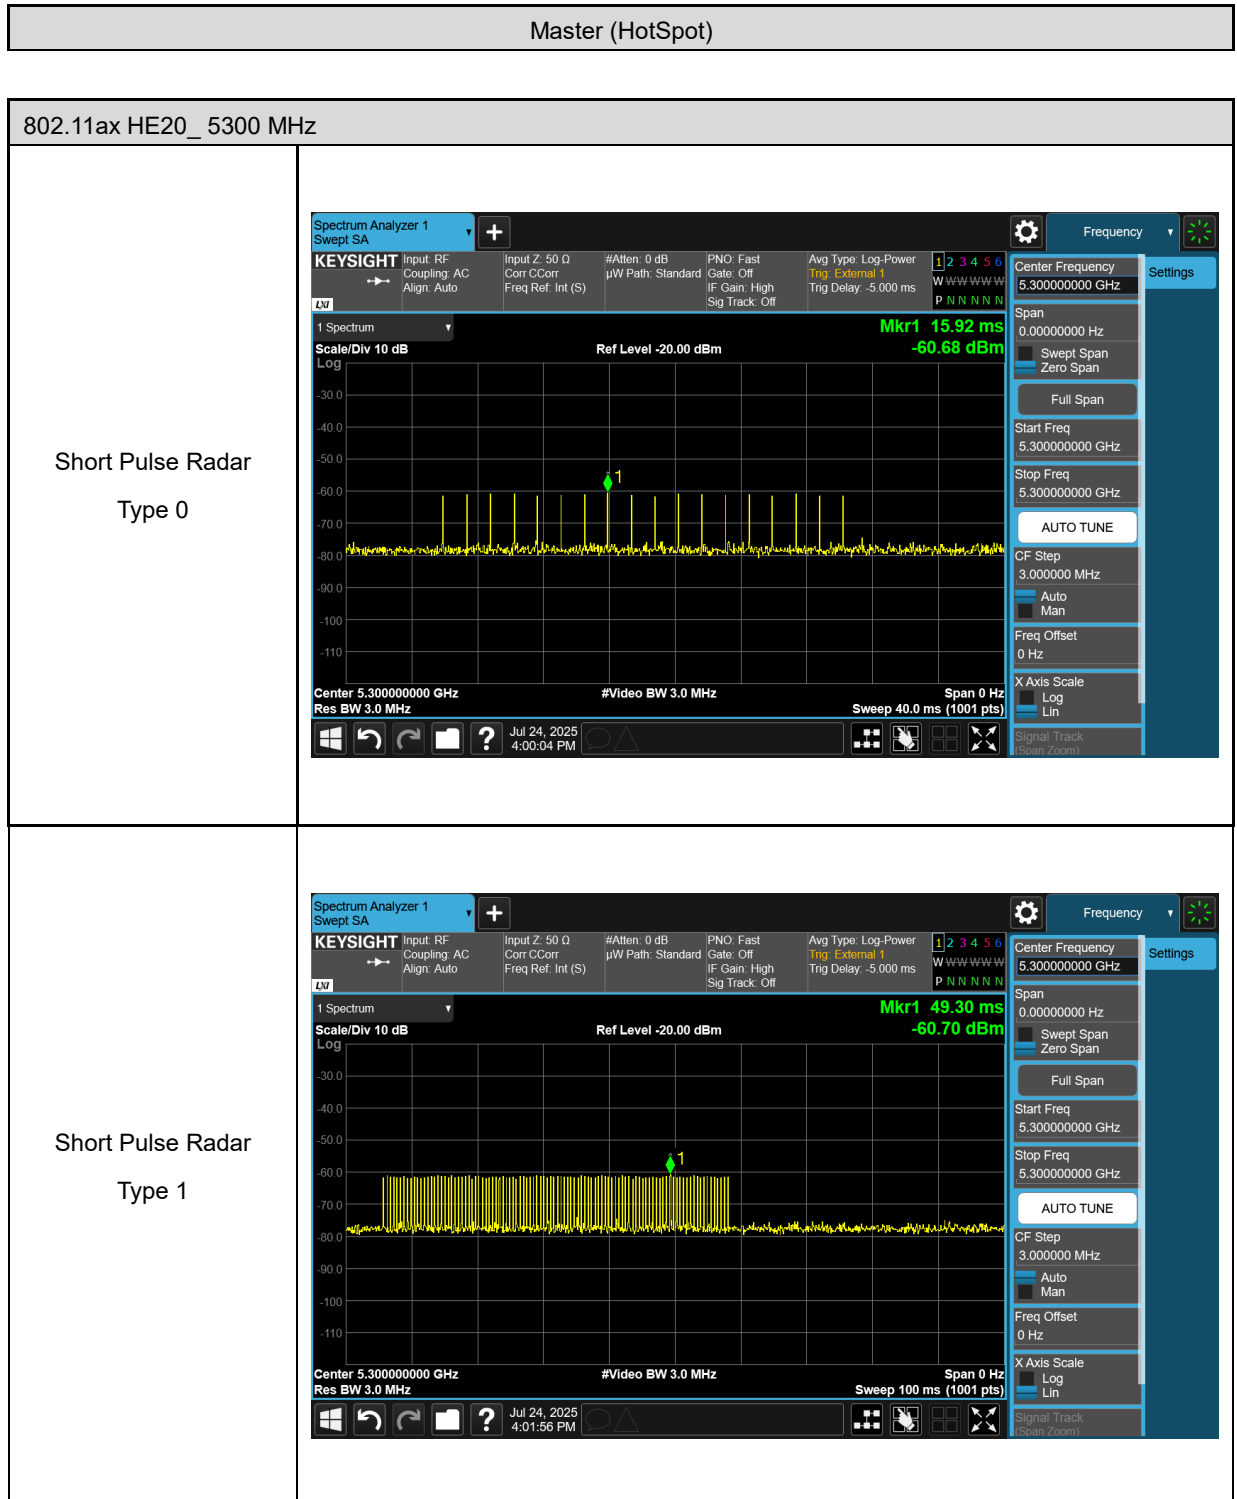


802.11ax HE20_ 5300 MHz

Short Pulse Radar
Type 2

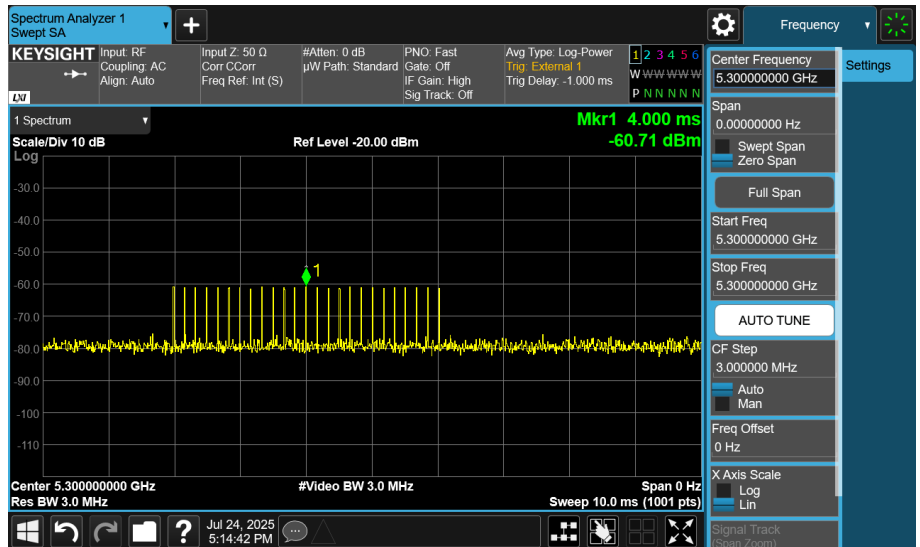


Short Pulse Radar
Type 3

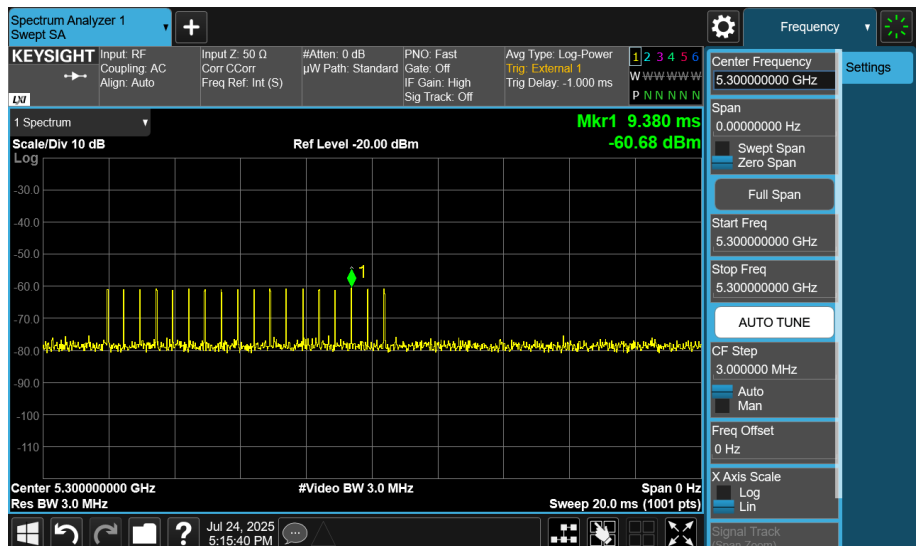



802.11ax HE20_ 5300 MHz

Short Pulse Radar
Type 4

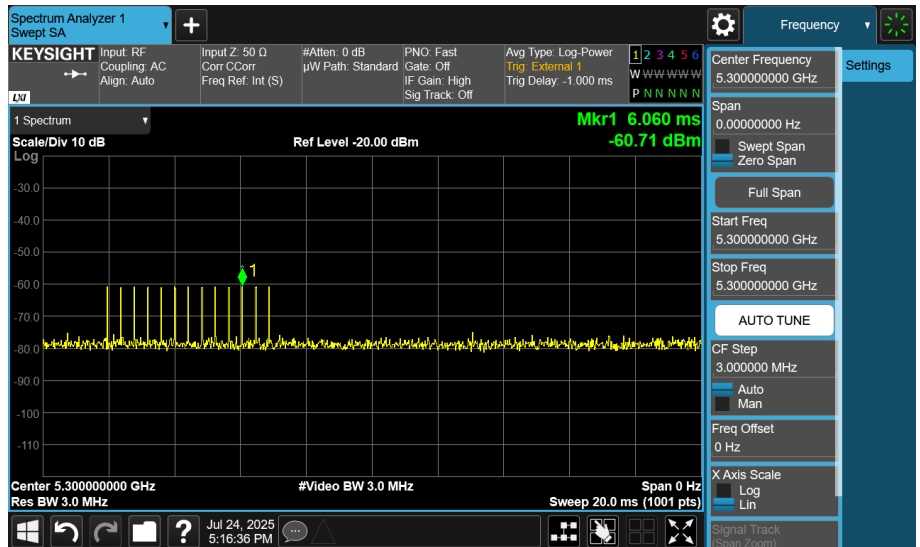


Short Pulse Radar
Type 5

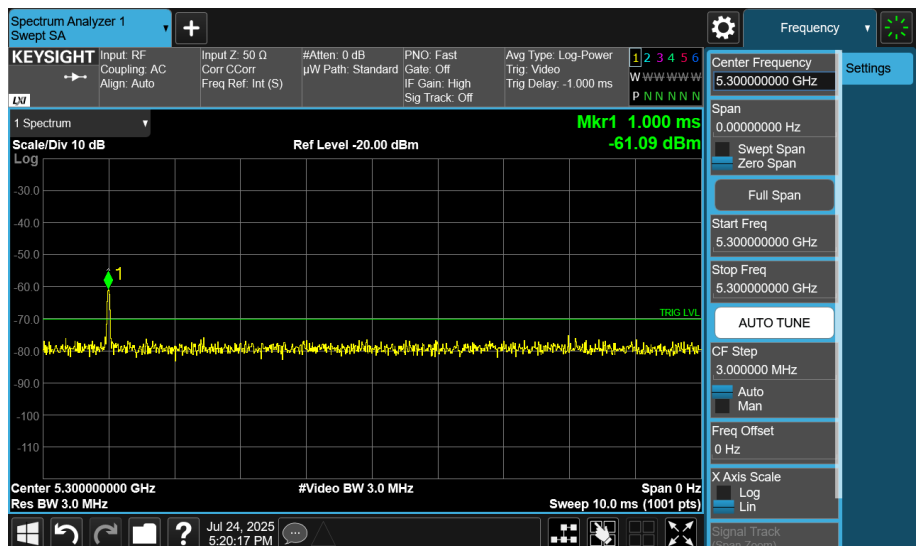

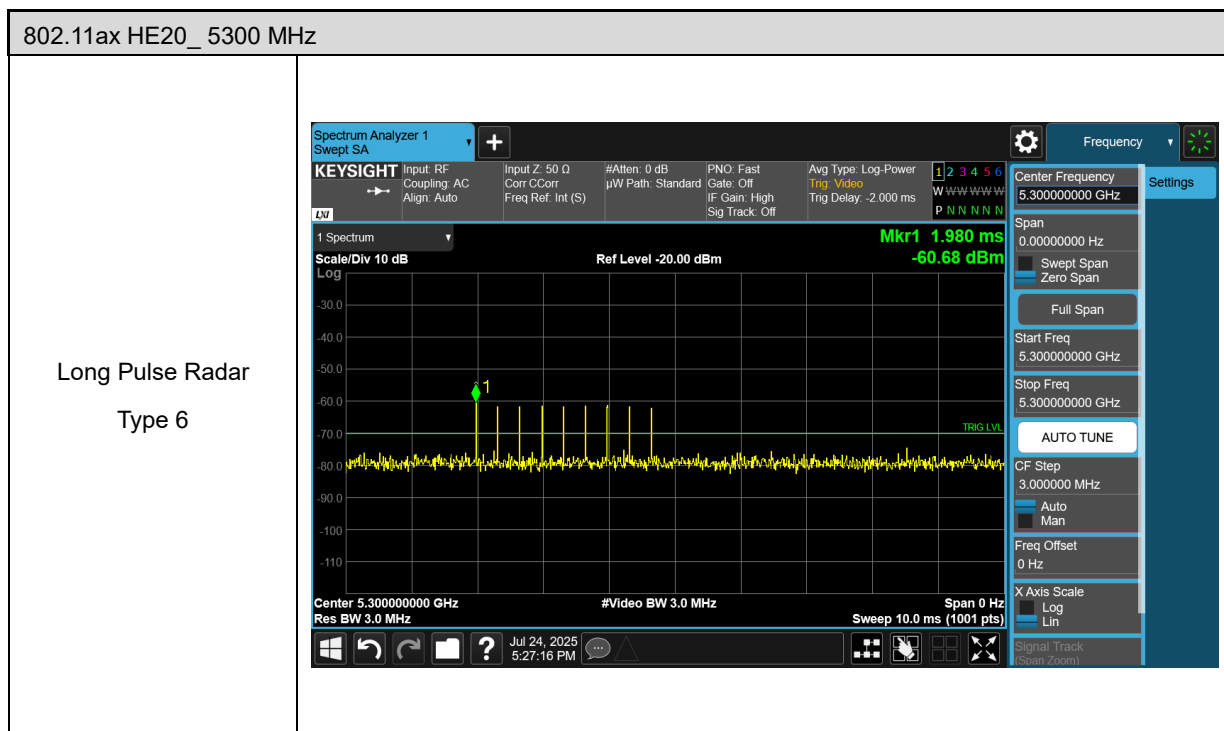


802.11ax HE40_ 5310 MHz

Short Pulse Radar
Type 0

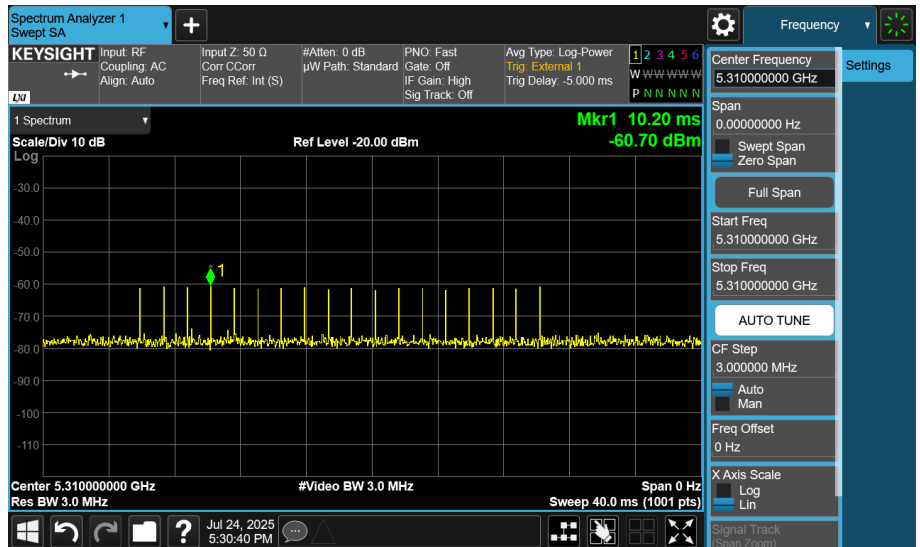


Short Pulse Radar
Type 1

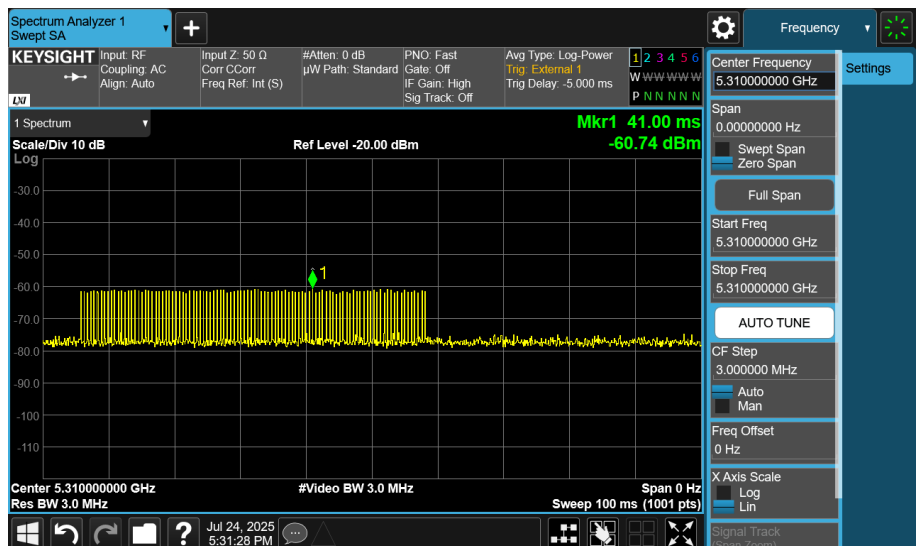


802.11ax HE40_ 5310 MHz

Short Pulse Radar
Type 2

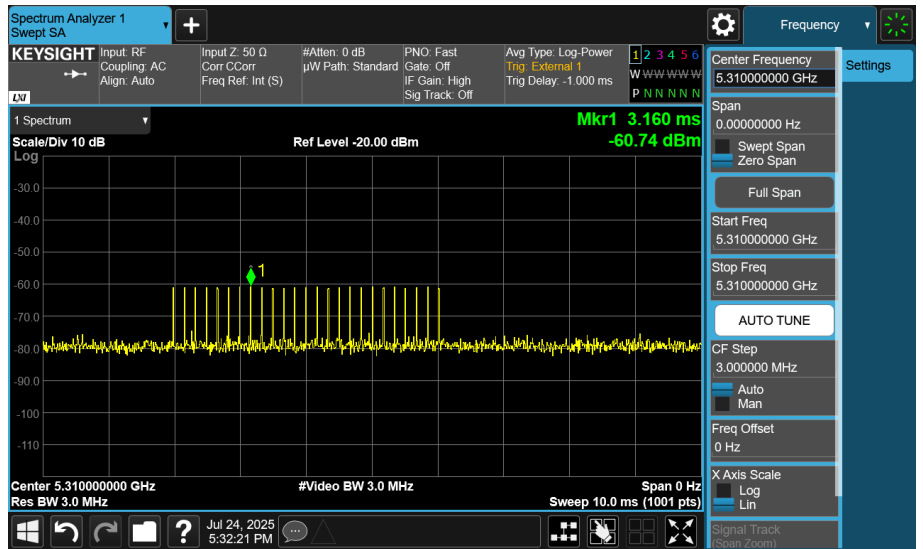


Short Pulse Radar
Type 3

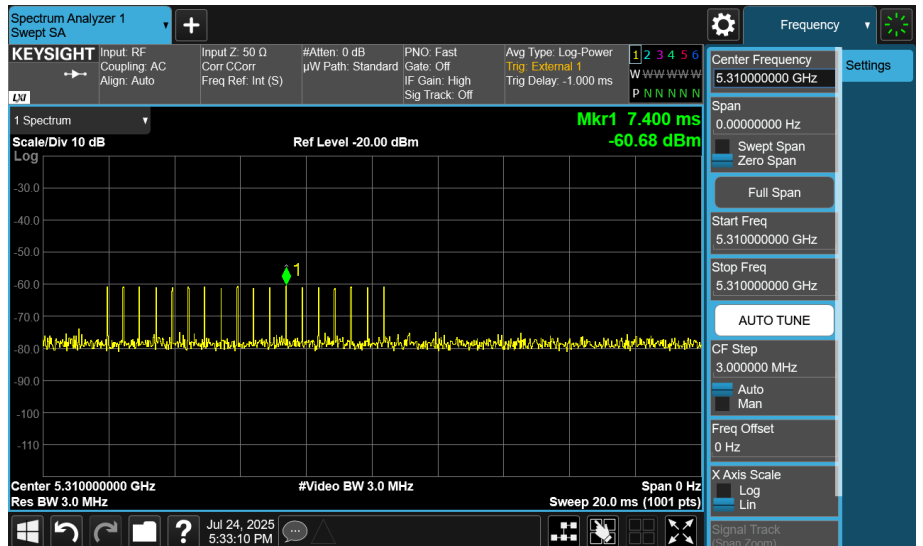



802.11ax HE40_ 5310 MHz

Short Pulse Radar
Type 4

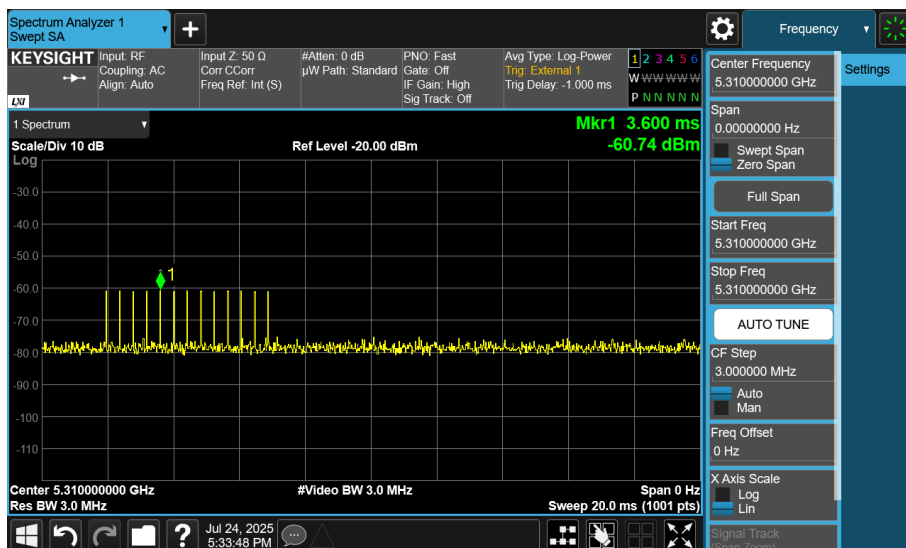


Short Pulse Radar
Type 5

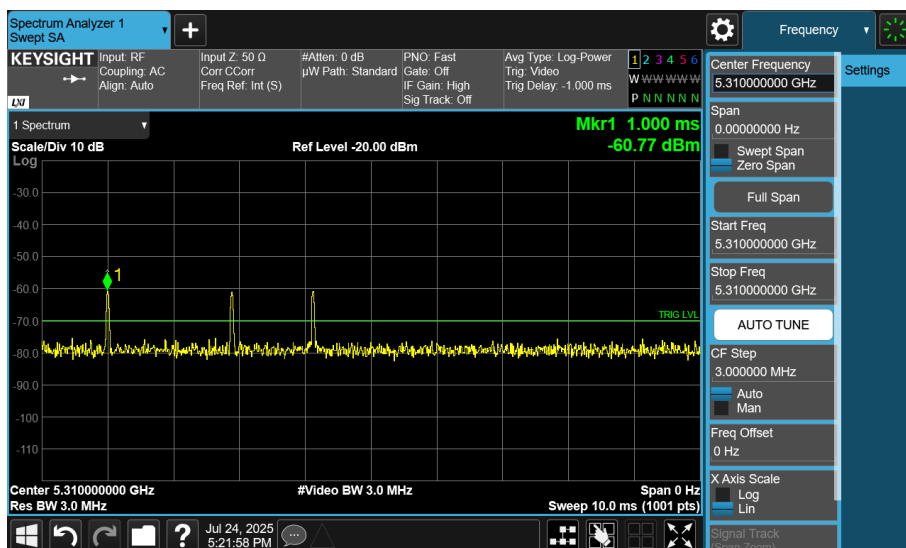

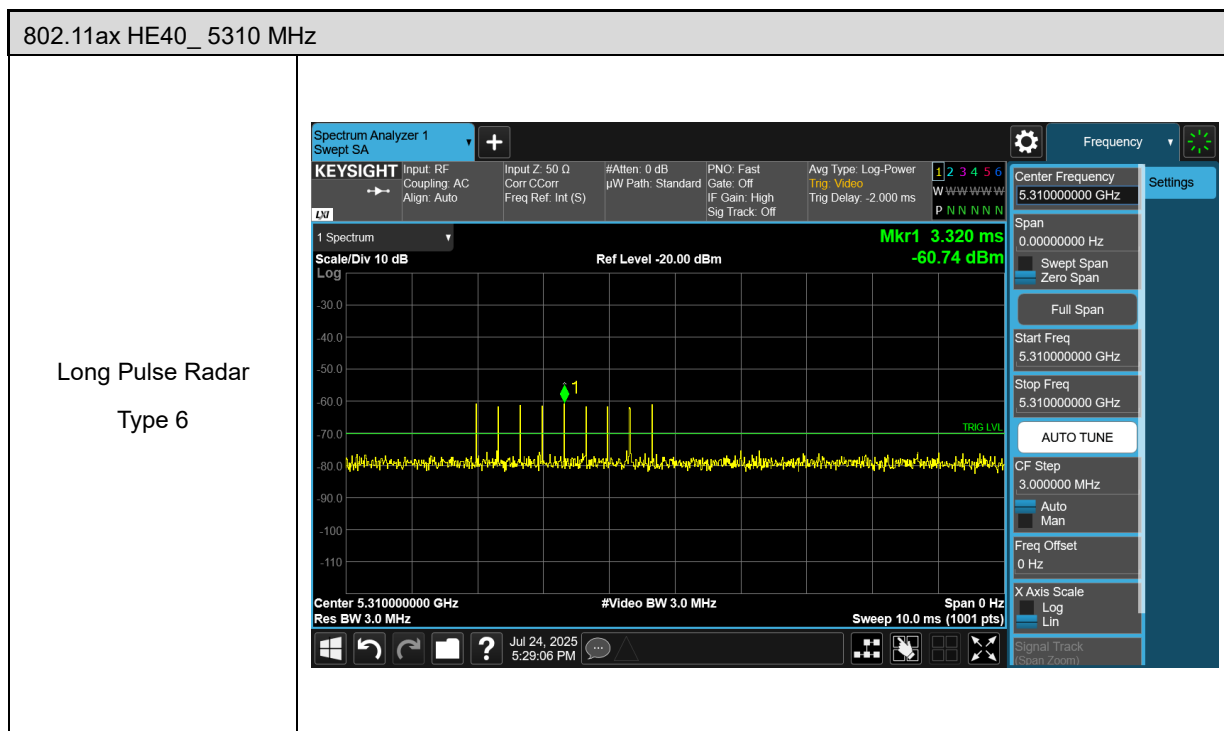


802.11ax HE80_ 5290 MHz

Short Pulse Radar
Type 0

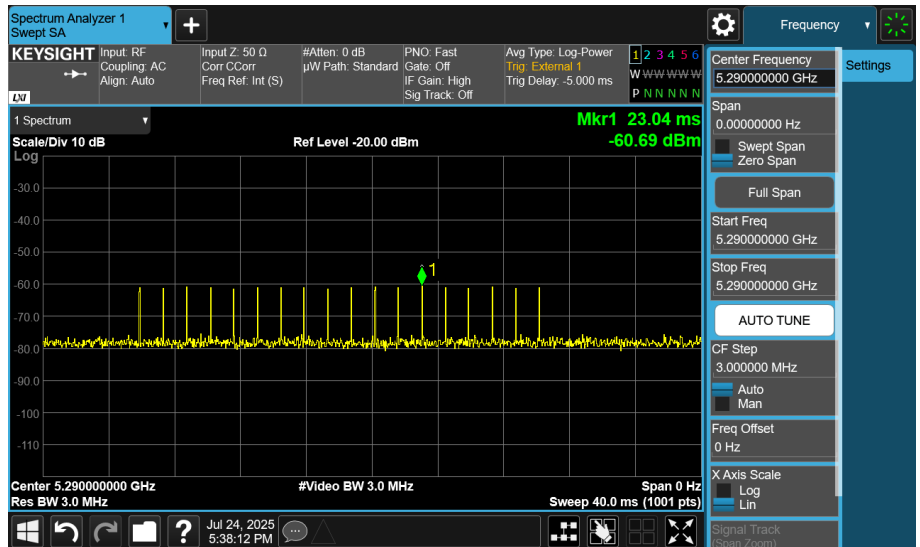


Short Pulse Radar
Type 1

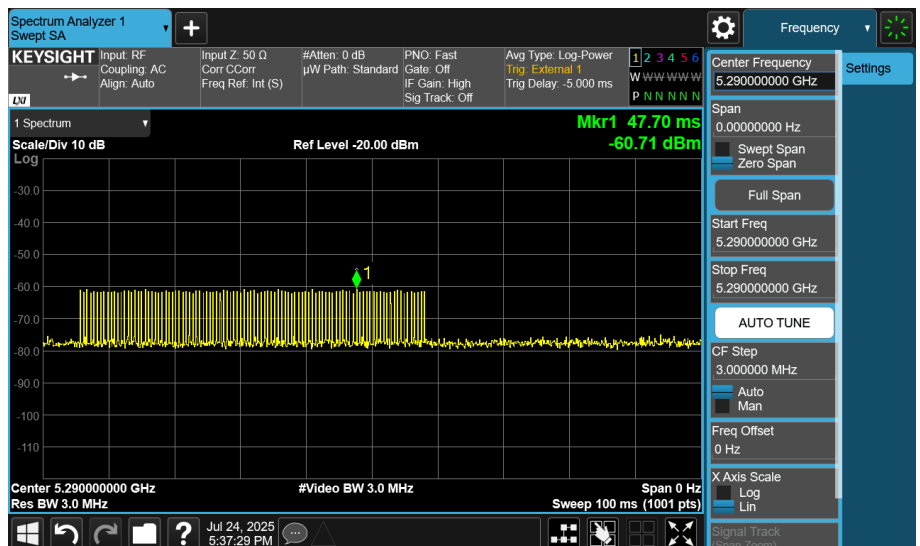


802.11ax HE80_ 5290 MHz

Short Pulse Radar
Type 2

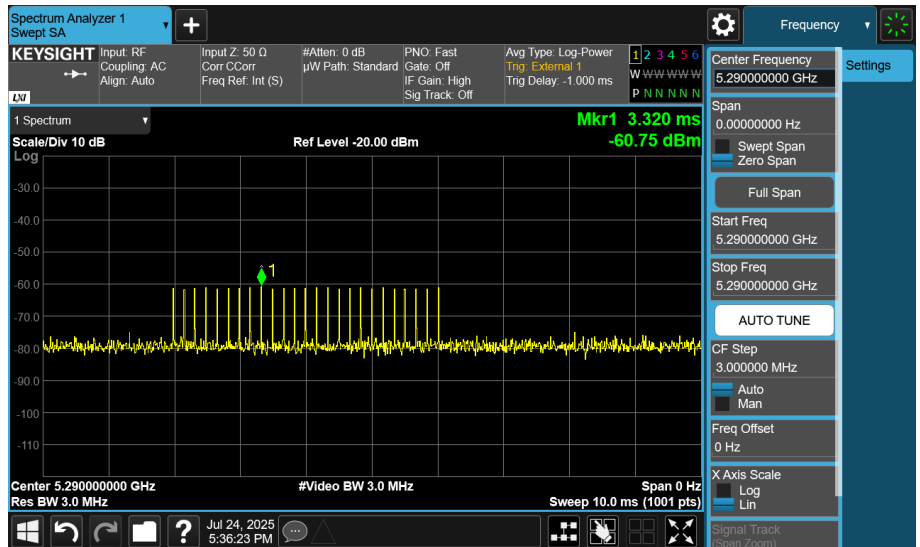


Short Pulse Radar
Type 3

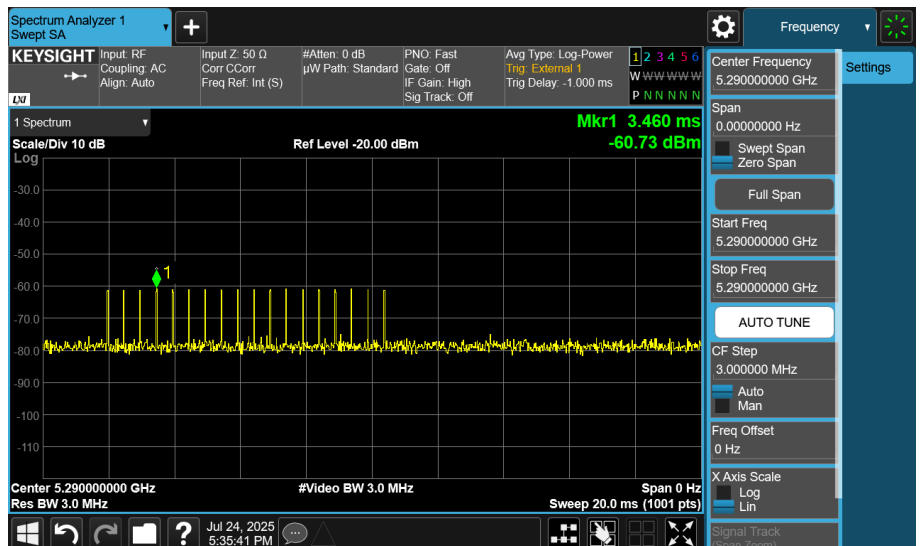



802.11ax HE80_ 5290 MHz

Short Pulse Radar
Type 4

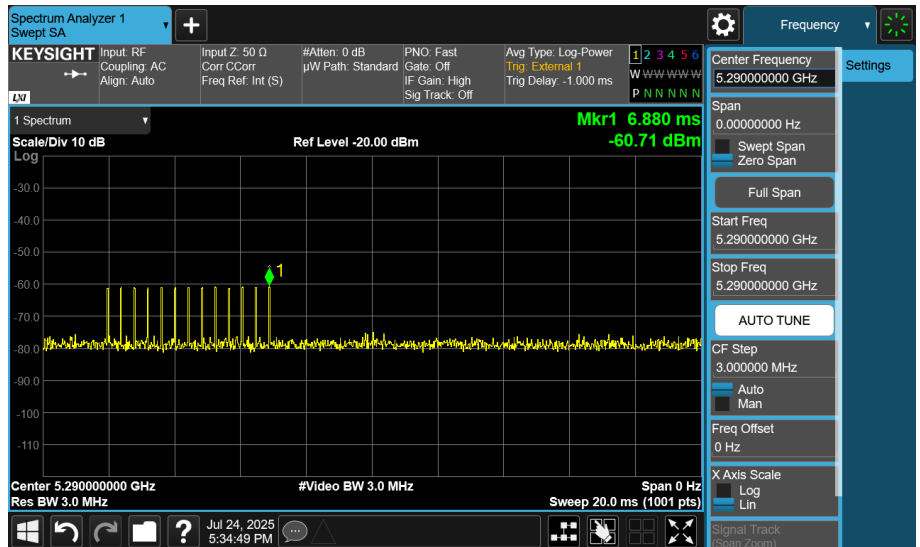


Short Pulse Radar
Type 5

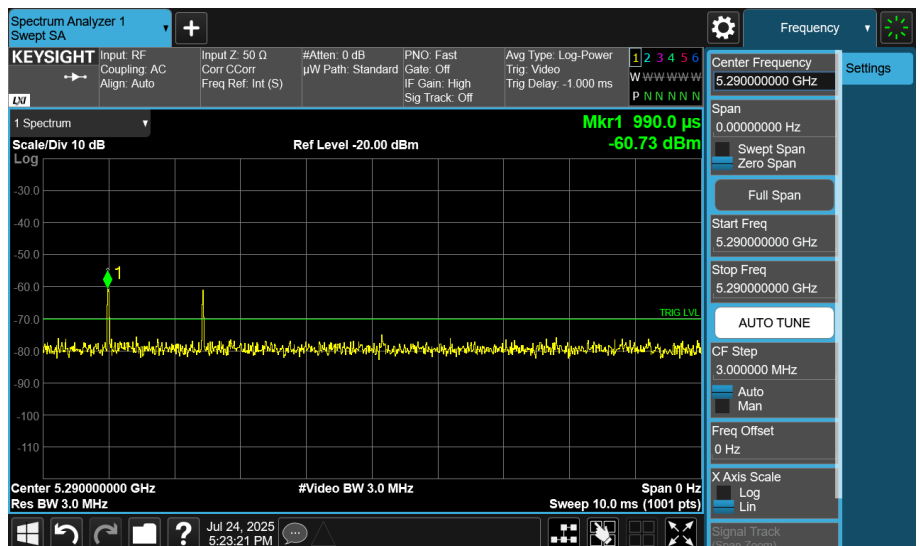

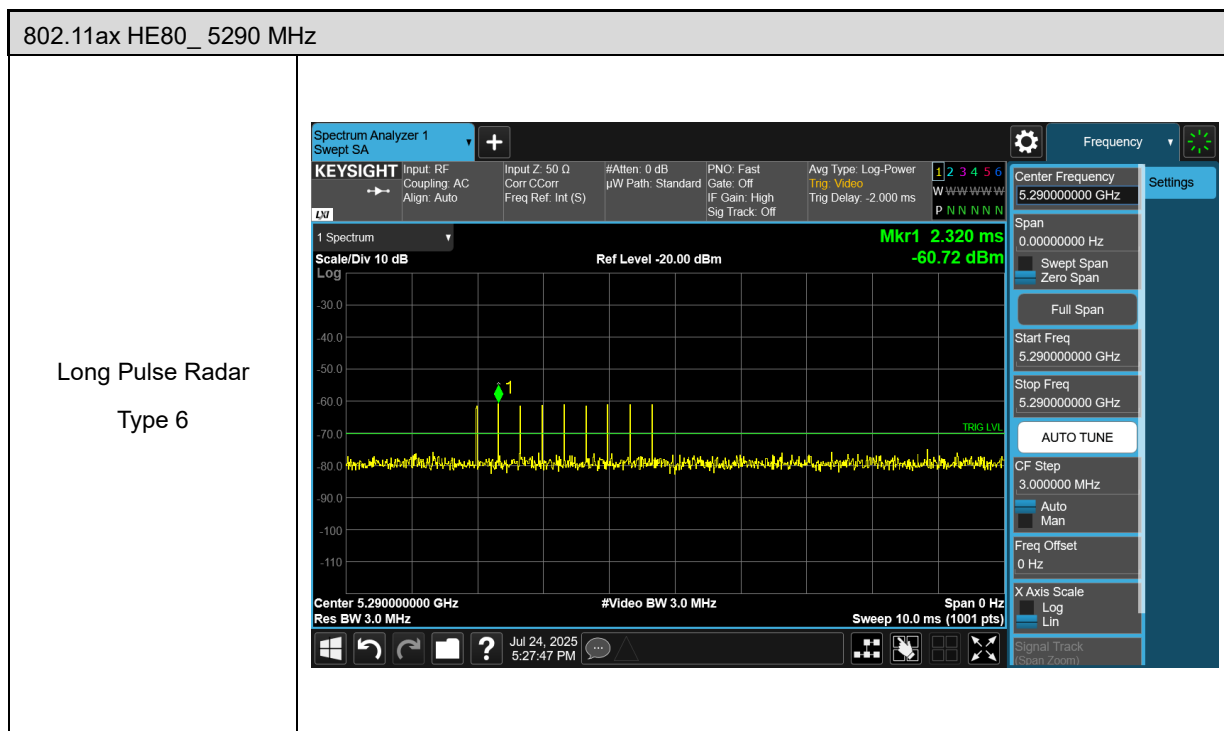


5.2. Channel Loading

■ Duty cycle $\geq 17\%$

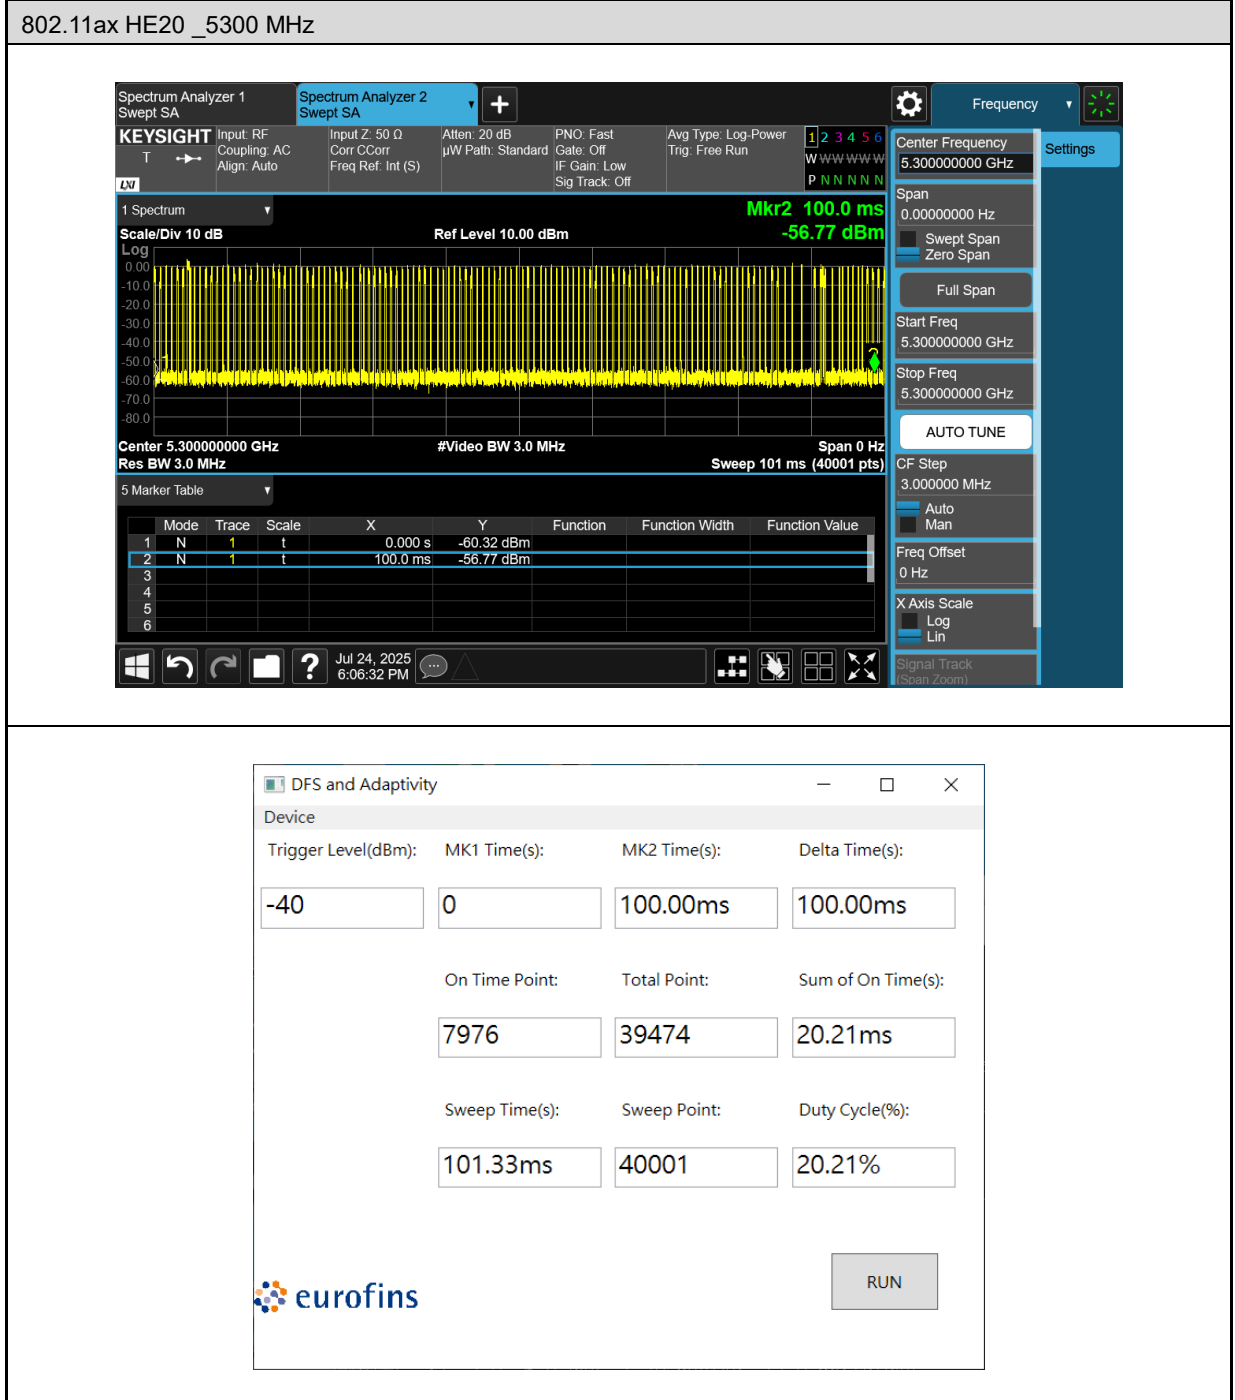

802.11ax HE40_5310 MHz

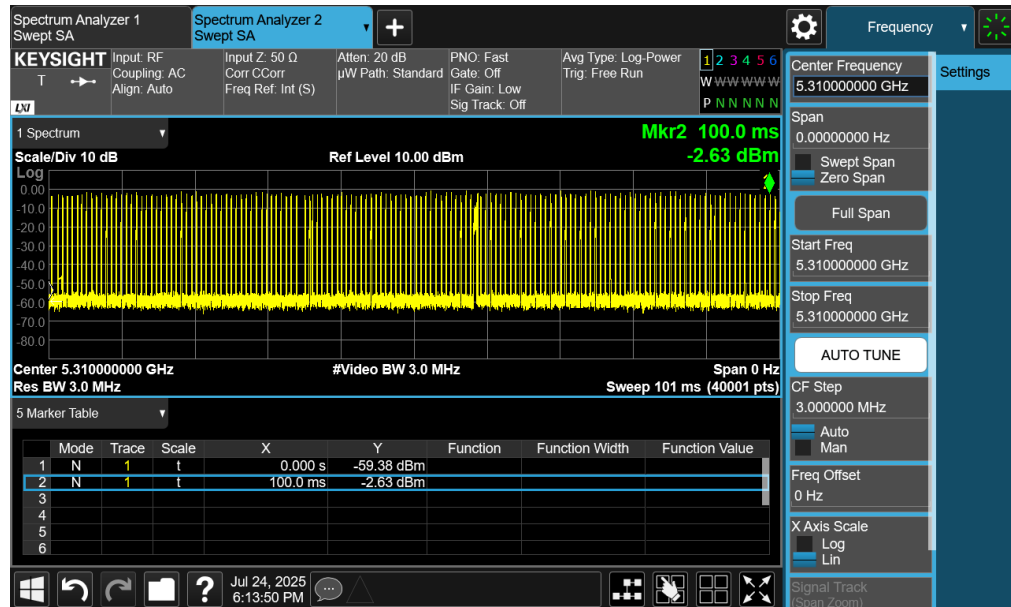

DFS and Adaptivity

Device

Trigger Level(dBm):
MK1 Time(s):
MK2 Time(s):
Delta Time(s):

-40
0
100.00ms
100.00ms

On Time Point:
Total Point:
Sum of On Time(s):

6932
39474
17.56ms


Sweep Time(s):
Sweep Point:
Duty Cycle(%):

101.33ms
40001
17.56%

eurofins

RUN

802.11ax HE80_5290 MHz

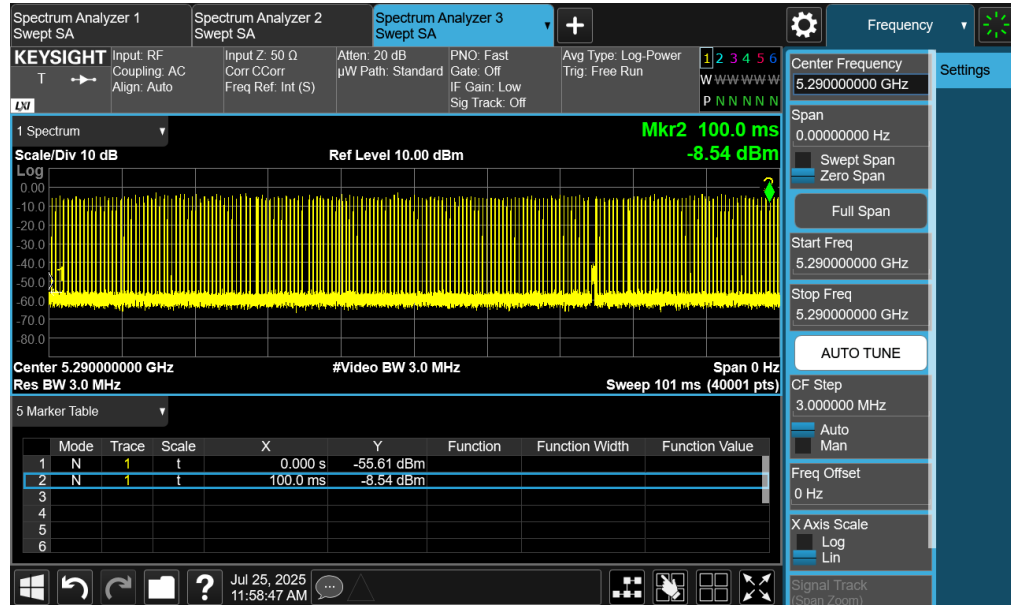

DFS and Adaptivity

Device

Trigger Level(dBm):
MK1 Time(s):
MK2 Time(s):
Delta Time(s):

-50
0
100.00ms
100.00ms

On Time Point:
Total Point:
Sum of On Time(s):

7370
39474
18.67ms

Sweep Time(s):
Sweep Point:
Duty Cycle(%):

101.33ms
40001
18.67%

eurofins

RUN

Eurofins E&E Wireless Taiwan Co., Ltd.

Template : v02.00

Page 33 of 101

5.3. Channel Availability Check Time

5.3.1. Procedure to Determine Initial Power-Up Cycle Time

A link was established on channel then the EUT was rebooted. The time from the cessation of traffic to the re-initialization of traffic was measured as the time required for the EUT to complete the total power-up cycle. The time to complete the initial power-up period is 60 seconds less than this total power-up time.

5.3.2. Procedure for Timing Of Radar Burst

With a link established on channel, the EUT was rebooted. A radar signal was triggered within 0 to 6 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.


The Non-Occupancy list was cleared. With a link established on channel, the EUT was rebooted. A radar signal was triggered within 54 to 60 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

5.3.3. Qualitative Results


Timing of Radar Burst	Display on Control Computer	Spectrum Analyzer Display
No Radar Triggered	EUT marks Channel as active	Transmissions begin on channel after completion of the initial power-up cycle and the CAC
Within 0 to 6 second window	EUT indicates radar detected	No transmissions on channel
Within 54 to 60 second window	EUT indicates radar detected	No transmissions on channel


802.11ax HE80_ 5290 MHz

Initial Channel
Availability Check

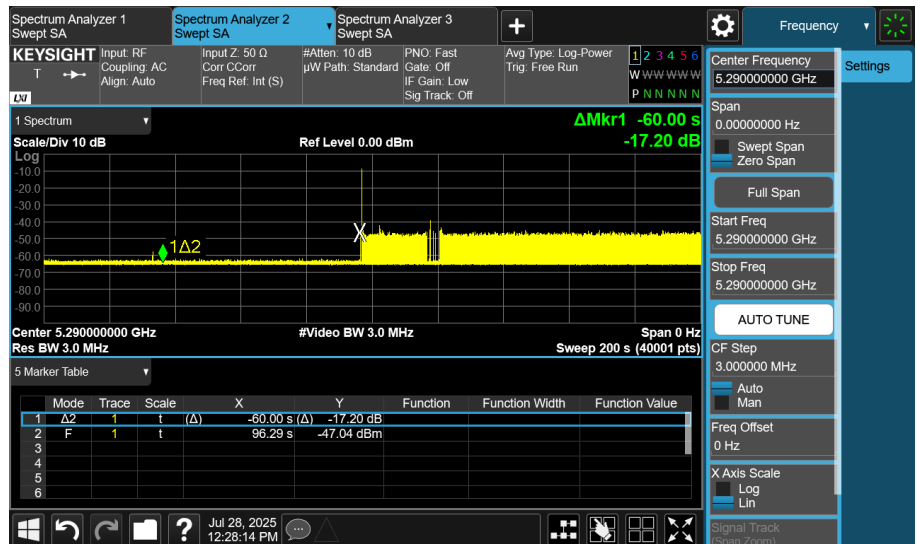

Initial Channel
Availability Check
Begin

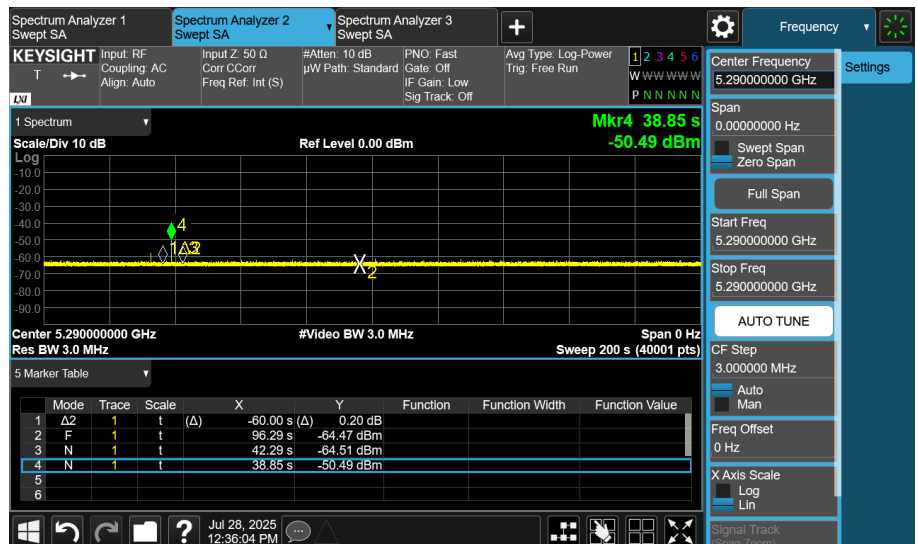

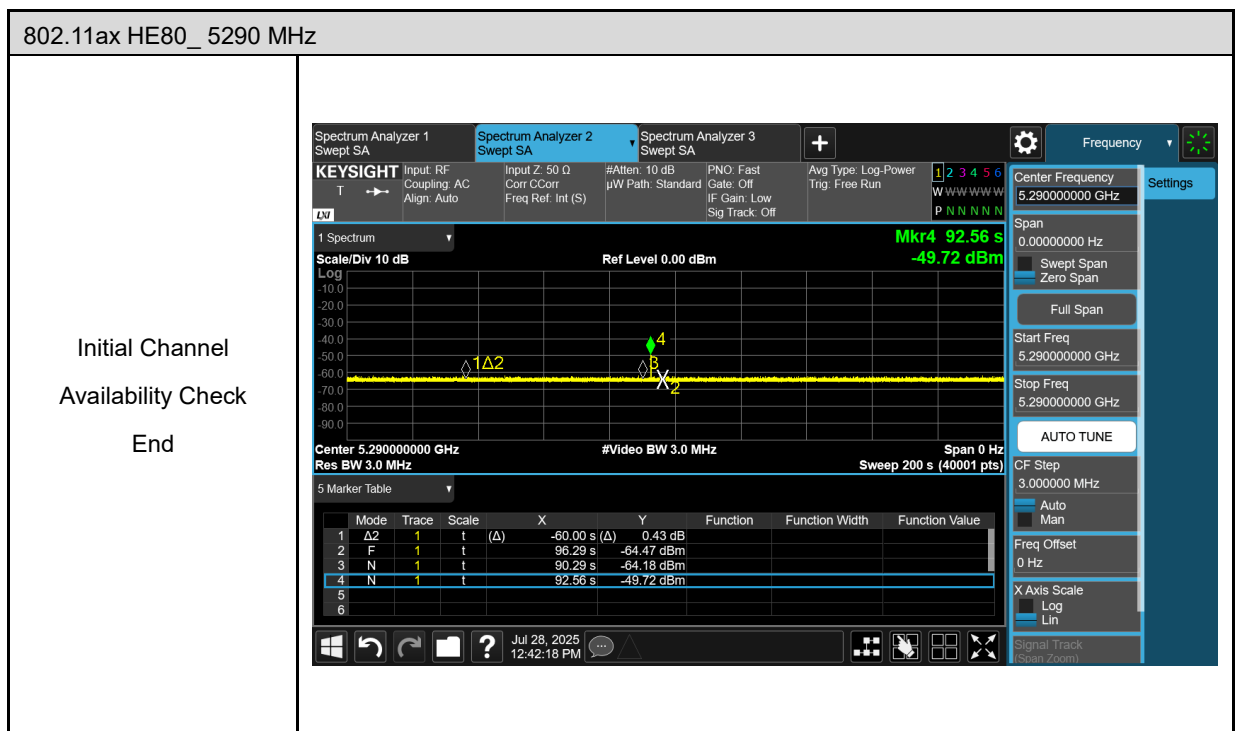

5.4. Channel Move Time and Channel Closing Transmission Time

5.4.1. Reporting Notes

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse.
This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time = (Number of analyzer bins showing transmission) * (dwell time per bin)


The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Results

Frequency (MHz)	Radar Type	Channel Move Time (msec)		Limit (sec)
		Master	Client	
5290	Type 0	624.5	64.5000	10

Frequency (MHz)	Radar Type	Aggregate Channel Closing Transmission Time (msec)		Limit (msec)
		Master	Client	
5290	Type 0	4.5	0.0000	60


Master(Hotspot) :

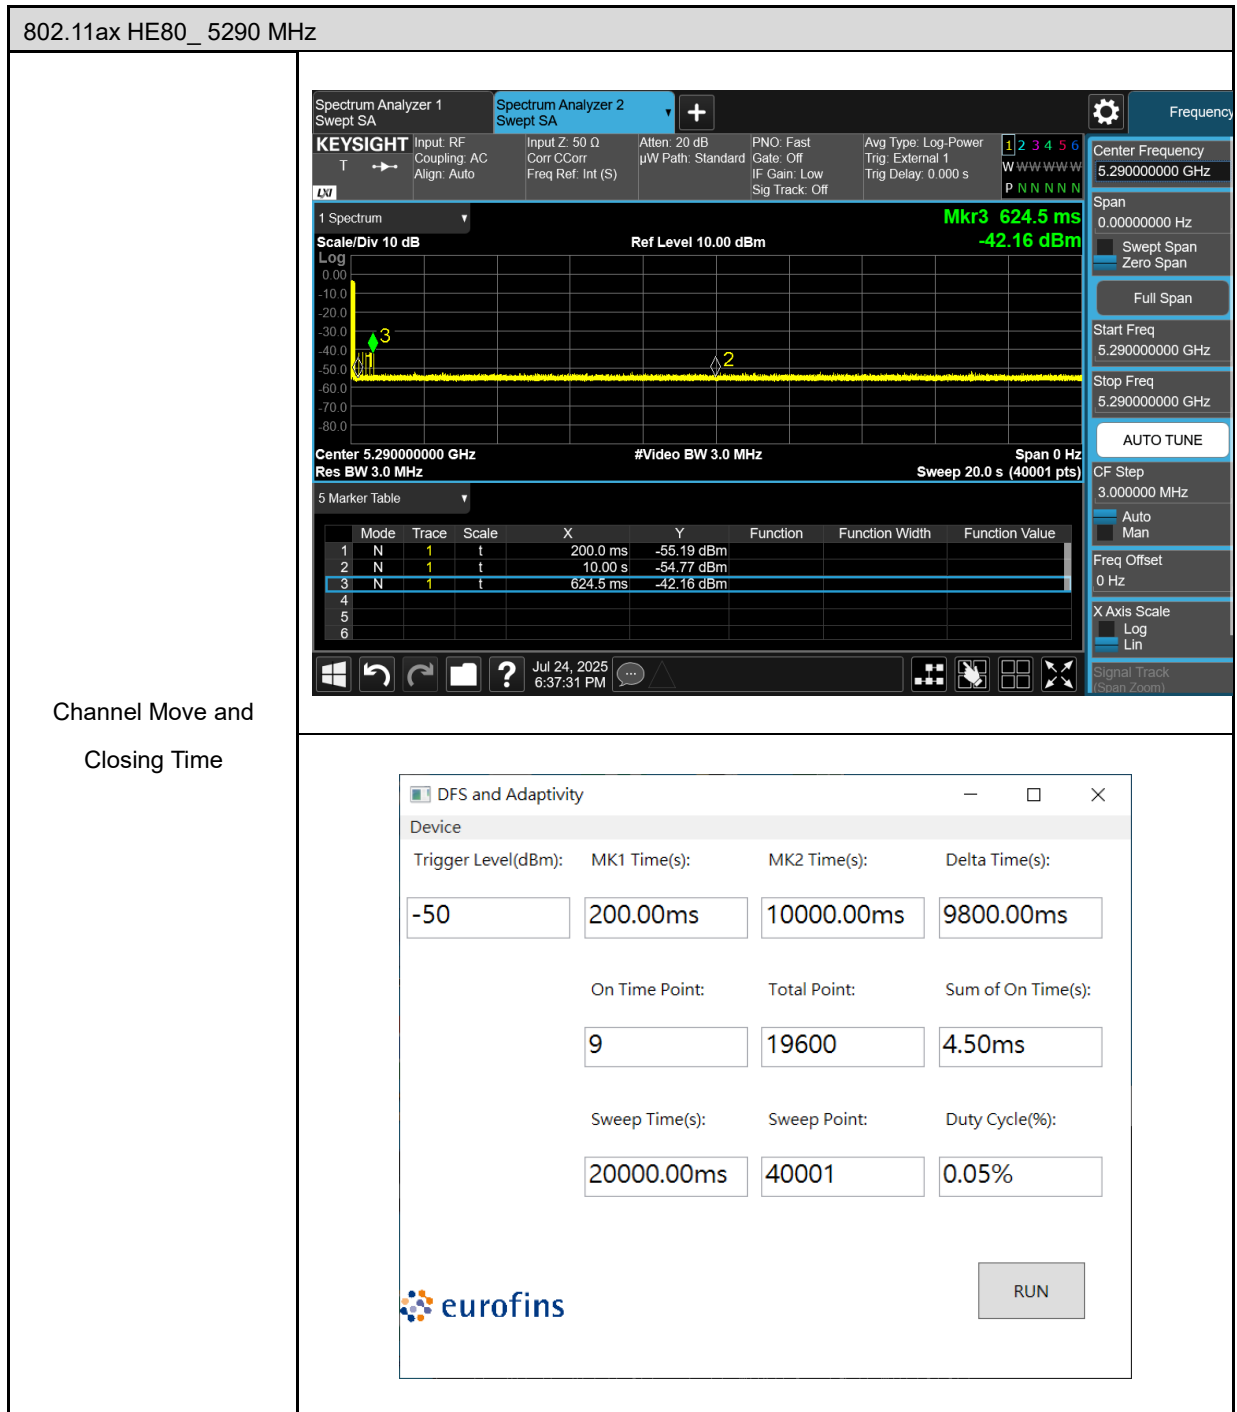

Client :

802.11ax HE80_ 5290 MHz

Channel Move and
Closing Time

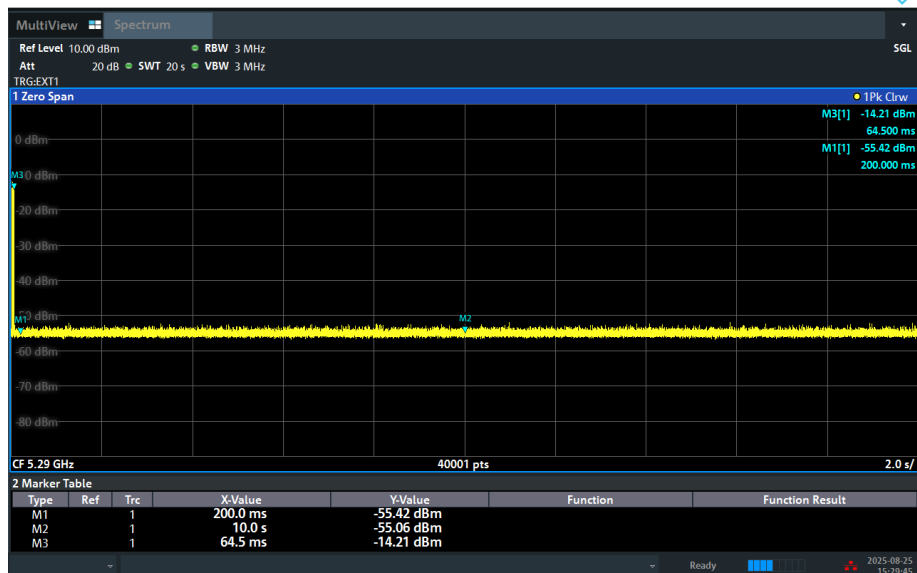

5.5. Non-Occupancy Period



Note: Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

5.6. U-NII Detection Bandwidth

■ Test Results


Test Mode	802.11ax HE20					
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5300	5290	5310	20	18.962	105.47	≥ 100

Test Mode	802.11ax HE40					
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5310	5530	5570	40	37.957	105.38	≥ 100


Test Mode	802.11ax HE80					
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5290	5250	5330	80	76.042	105.21	≥ 100

Test Graphs


802.11ax HE20_ 5300 MHz

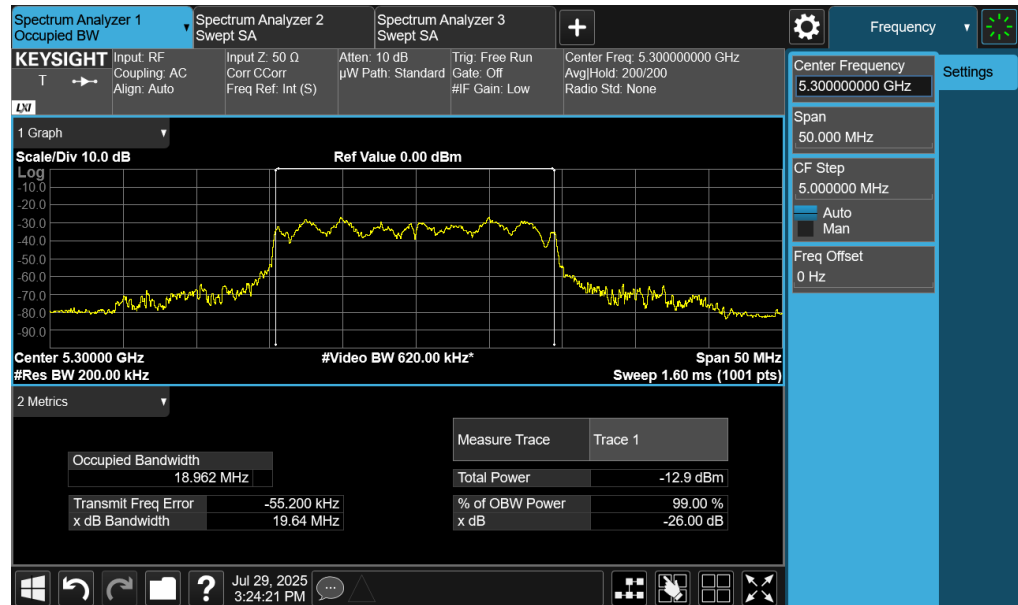

802.11ax HE40_ 5310 MHz

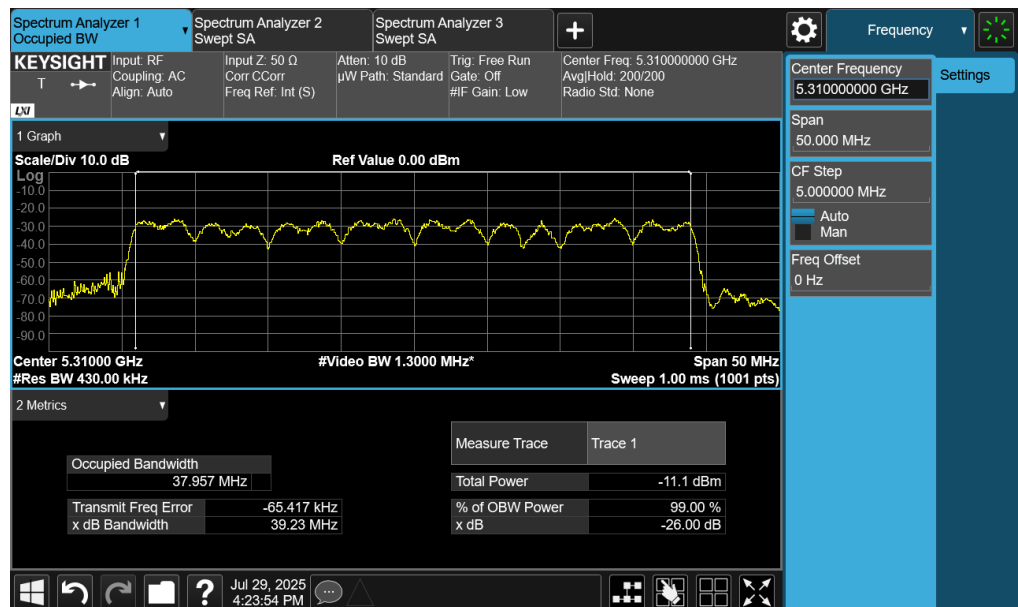

802.11ax HE80_ 5290 MHz

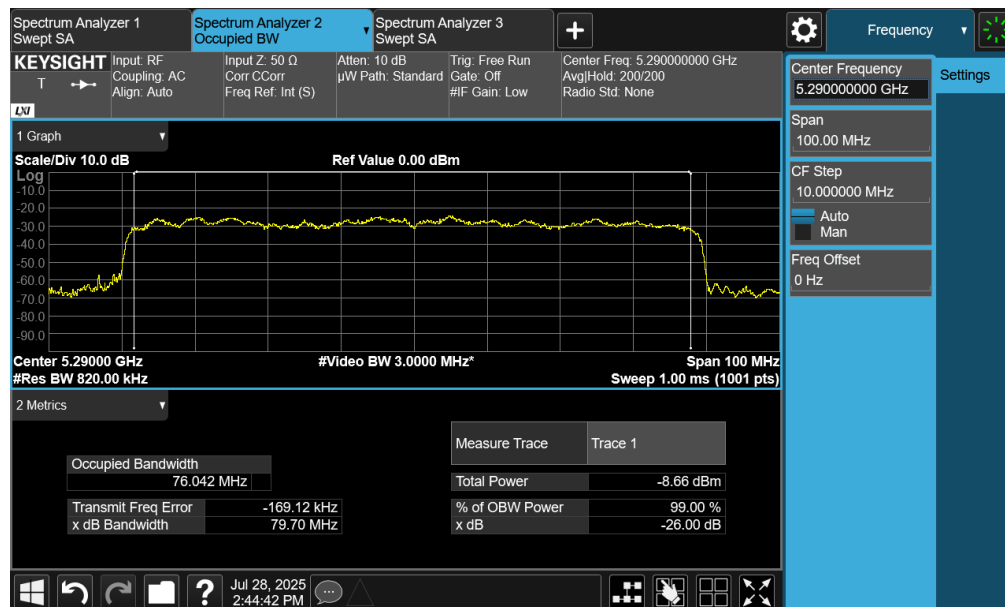

5.7. Statistical Performance check

■ Test Results

Test Mode		802.11ax HE20					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5300	Type1	Table 5a	1	29	1	96.67%	≥ 60 %
	Type2	Random	Random	29	1	96.67%	≥ 60 %
	Type3	Random	Random	28	2	93.33%	≥ 60 %
	Type4	Random	Random	28	2	93.33%	≥ 60 %
	Type1~4					95.00%	≥ 80 %
	Type5	Random	Random	29	1	96.67%	≥ 80 %
	Type6	Hopping	1	30	0	100.00%	≥ 70 %

Test Mode		802.11ax HE40					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5310	Type1	Table 5a	1	28	2	93.33%	≥ 60 %
	Type2	Random	Random	29	1	96.67%	≥ 60 %
	Type3	Random	Random	28	2	93.33%	≥ 60 %
	Type4	Random	Random	30	0	100.00%	≥ 60 %
	Type1~4					95.83%	≥ 80 %
	Type5	Random	Random	27	3	90.00%	≥ 80 %
	Type6	Hopping	1	30	0	100.00%	≥ 70 %

Test Mode		802.11ax HE80					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5290	Type1	Table 5a	1	27	3	90.00%	≥60 %
	Type2	Random	Random	29	1	96.67%	≥60 %
	Type3	Random	Random	27	3	90.00%	≥60 %
	Type4	Random	Random	27	3	90.00%	≥60 %
	Type1~4					86.67 %	≥80 %
	Type5	Random	Random	29	1	96.67%	≥80 %
	Type6	Hopping	1	30	0	100.00%	≥70 %

Test Mode		802.11ax HE20				
Frequency		5300 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	1	818	65	1222	1
2	5300	1	578	92	1730	1
3	5300	1	678	78	1475	1
4	5300	1	718	74	1393	1
5	5300	1	538	99	1859	1
6	5300	1	858	62	1166	1
7	5300	1	538	99	1859	1
8	5300	1	818	65	1222	1
9	5300	1	598	89	1672	1
10	5300	1	798	67	1253	1
11	5300	1	558	95	1792	1
12	5300	1	878	61	1139	1
13	5300	1	598	89	1672	1
14	5300	1	638	83	1567	1
15	5300	1	778	68	1285	1
16	5300	1	2134	25	469	1
17	5300	1	2093	26	478	1
18	5300	1	2090	26	478	1
19	5300	1	2652	20	377	1
20	5300	1	1090	49	917	1
21	5300	1	1510	35	662	1
22	5300	1	1091	49	917	1
23	5300	1	1053	51	950	1
24	5300	1	2505	22	399	0
25	5300	1	560	95	1786	1
26	5300	1	1528	35	654	1
27	5300	1	2607	21	384	1
28	5300	1	2882	19	347	1
29	5300	1	2788	19	359	1
30	5300	1	2447	22	409	1
Detection Percentage (%)						96.67

Test Mode		802.11ax HE20				
Frequency		5300 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	1.70	229.20	26	4363	1
2	5300	2.60	154.00	23	6494	1
3	5300	1.60	205.10	23	4876	1
4	5300	1.20	217.10	27	4606	1
5	5300	1.50	170.80	24	5855	1
6	5300	2.90	194.60	25	5139	1
7	5300	2.60	163.20	28	6127	1
8	5300	2.40	163.50	24	6116	1
9	5300	1.50	176.20	23	5675	1
10	5300	4.80	173.00	24	5780	1
11	5300	1.50	198.80	26	5030	1
12	5300	3.90	225.00	29	4444	1
13	5300	3.50	225.70	23	4431	1
14	5300	3.90	178.90	29	5590	1
15	5300	4.40	204.90	27	4880	1
16	5300	2.80	184.70	26	5414	1
17	5300	4.80	228.70	27	4373	1
18	5300	1.60	152.30	24	6566	0
19	5300	3.50	202.40	27	4941	1
20	5300	2.10	204.00	28	4902	1
21	5300	1.10	176.10	29	5679	1
22	5300	1.20	201.00	25	4975	1
23	5300	3.40	219.20	27	4562	1
24	5300	1.10	164.90	29	6064	1
25	5300	4.20	151.70	23	6592	1
26	5300	2.20	222.80	25	4488	1
27	5300	4.50	209.80	27	4766	1
28	5300	1.40	188.00	25	5319	1
29	5300	4.70	191.60	26	5219	1
30	5300	4.90	156.60	27	6386	1
Detection Percentage (%)						96.67

Test Mode		802.11ax HE20				
Frequency		5300 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	7.00	259.40	18	3855.05	1
2	5300	8.90	289.20	18	3457.81	1
3	5300	6.90	388.40	17	2574.67	1
4	5300	6.30	477.00	17	2096.44	1
5	5300	6.10	390.80	18	2558.85	1
6	5300	8.60	390.90	16	2558.20	1
7	5300	7.10	487.70	18	2050.44	1
8	5300	6.80	474.20	16	2108.81	1
9	5300	8.80	489.30	16	2043.74	1
10	5300	9.50	452.30	18	2210.92	0
11	5300	9.90	346.20	17	2888.50	1
12	5300	8.50	484.90	16	2062.28	1
13	5300	8.50	481.10	18	2078.57	1
14	5300	7.50	336.50	18	2971.77	1
15	5300	7.70	369.20	16	2708.56	1
16	5300	6.60	222.40	18	4496.40	1
17	5300	6.10	299.90	18	3334.44	1
18	5300	7.90	339.50	17	2945.51	1
19	5300	9.80	485.50	16	2059.73	1
20	5300	9.40	272.00	17	3676.47	1
21	5300	10.00	379.30	17	2636.44	0
22	5300	7.00	366.10	16	2731.49	1
23	5300	6.50	401.70	17	2489.42	1
24	5300	9.50	446.40	18	2240.14	1
25	5300	9.80	397.00	17	2518.89	1
26	5300	8.30	291.10	18	3435.25	1
27	5300	8.70	497.50	17	2010.05	1
28	5300	8.50	479.00	17	2087.68	1
29	5300	8.60	388.30	17	2575.33	1
30	5300	7.20	456.00	16	2192.98	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE20				
Frequency		5300 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	12.00	222.30	15	4498	1
2	5300	17.90	448.40	15	2230	1
3	5300	17.40	388.60	16	2573	1
4	5300	15.40	272.30	12	3672	1
5	5300	17.60	379.90	16	2632	1
6	5300	12.00	298.20	12	3353	1
7	5300	14.70	485.30	16	2061	1
8	5300	16.30	478.30	15	2091	1
9	5300	16.20	338.20	12	2957	1
10	5300	14.70	378.40	16	2643	1
11	5300	14.40	328.00	12	3049	1
12	5300	14.90	388.80	14	2572	0
13	5300	12.40	258.90	14	3862	1
14	5300	12.50	443.20	12	2256	0
15	5300	11.90	422.60	15	2366	1
16	5300	11.90	215.30	15	4645	1
17	5300	13.40	349.80	15	2859	1
18	5300	13.60	216.60	13	4617	1
19	5300	13.90	497.60	15	2010	1
20	5300	14.40	216.70	16	4615	1
21	5300	19.10	254.30	12	3932	1
22	5300	15.00	277.80	15	3600	1
23	5300	15.20	486.80	16	2054	1
24	5300	13.50	370.30	12	2701	1
25	5300	12.90	394.70	14	2534	1
26	5300	14.40	244.00	15	4098	1
27	5300	13.30	441.50	16	2265	1
28	5300	14.00	320.50	14	3120	1
29	5300	19.20	394.20	16	2537	1
30	5300	19.30	391.60	13	2554	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5296.5	1	50.0	15	1075.2	2	1
	5293.5	2	92.7	8	1769.6	1	
	5294.5	3	87.8	11	1759.7	3	
	5294.5	4	53.0	10	1166.8	3	
	5294.5	5	99.0	9	1831.5	3	
	5296.5	6	77.3	16	1681.5	3	
	5292.5	7	91.7	6	1635.7	3	
	5293.5	8	93.9	8	1143.0	2	
	5296.5	9	79.9	14	1213.0	3	
	5292.5	10	66.7	5	1905.4	1	
	5294.5	11	54.3	10	1472.0	3	
2	5297.5	1	55.4	17	1913.5	1	1
	5294.5	2	59.2	9	1598.8	2	
	5298.5	3	59.8	19	1436.6	1	
	5297.5	4	99.9	17	1490.9	2	
	5297.5	5	95.1	17	1832.5	3	
	5296.5	6	79.7	14	1650.3	2	
	5292.5	7	57.4	5	1381.3	1	
	5293.5	8	66.5	7	1301.5	2	
	5294.5	9	53.7	11	1762.6	2	
	5294.5	10	83.0	9	1342.8	2	
	5295.5	11	90.8	12	1542.3	1	
	5296.5	12	66.7	15	1367.0	1	
3	5297.5	1	87.7	18	1498.2	2	1
	5293.5	2	69.3	8	1398.5	3	
	5296.5	3	94.1	16	1766.0	2	
	5298.5	4	50.4	20	1906.7	2	
	5294.5	5	56.7	11	1759.4	2	
	5294.5	6	76.1	9	1451.3	1	
	5296.5	7	67.4	14	1851.9	3	
	5295.5	8	75.3	13	1371.7	1	
	5292.5	9	94.6	6	1896.9	2	
	5294.5	10	92.0	11	1333.8	1	
	5296.5	11	94.4	14	1598.7	2	
	5298.5	12	72.3	19	1997.7	1	
	5297.5	13	86.7	18	1204.5	2	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5293.5	1	91.1	7	1775.4	3	1
	5293.5	2	52.8	7	1820.6	1	
	5294.5	3	92.5	10	1567.2	2	
	5297.5	4	71.0	17	1473.2	2	
	5292.5	5	96.6	6	1210.2	2	
	5297.5	6	98.5	18	1733.4	2	
	5293.5	7	99.7	7	1839.0	3	
	5293.5	8	96.7	8	1314.6	1	
	5297.5	9	84.8	17	1130.7	1	
5	5298.5	1	98.7	20	1825.6	1	1
	5298.5	2	55.4	19	1637.0	1	
	5297.5	3	68.3	18	1132.4	1	
	5294.5	4	72.8	11	1806.7	3	
	5294.5	5	81.7	9	1833.1	3	
	5298.5	6	93.6	19	1688.6	3	
	5295.5	7	55.9	12	1764.9	3	
	5295.5	8	83.2	12	1895.8	1	
	5294.5	9	60.6	10	1035.4	2	
	5292.5	10	65.5	6	1570.6	1	
	5293.5	11	73.6	8	1493.5	3	
	5297.5	12	55.7	18	1517.1	3	
	5297.5	13	96.4	18	1589.5	2	
	5296.5	14	88.4	14	1220.5	1	
	5297.5	15	57.6	18	1391.6	1	
6	5294.5	1	96.2	10	1798.7	2	1
	5294.5	2	84.8	11	1902.9	3	
	5292.5	3	59.3	6	1361.7	2	
	5298.5	4	50.2	19	1293.2	1	
	5294.5	5	82.5	10	1387.2	1	
	5297.5	6	85.0	18	1593.3	3	
	5298.5	7	88.3	19	1563.5	1	
	5293.5	8	77.6	7	1941.8	3	
	5296.5	9	54.9	15	1408.0	1	
	5298.5	10	62.9	20	1983.3	3	
	5296.5	11	53.6	14	1620.0	1	
	5296.5	12	96.3	15	1570.5	1	
	5292.5	13	88.9	6	1953.9	1	
	5294.5	14	64.3	11	1929.1	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5292.5	1	92.5	5	1503.7	3	1
	5295.5	2	95.4	12	1978.2	2	
	5297.5	3	82.3	18	1730.8	2	
	5298.5	4	91.4	19	1750.2	1	
	5296.5	5	60.7	16	1113.2	3	
	5298.5	6	93.0	20	1058.2	3	
	5297.5	7	68.5	17	1944.6	2	
	5298.5	8	98.0	20	1582.0	3	
	5292.5	9	63.1	6	1997.6	2	
	5294.5	10	77.1	11	1639.6	1	
	5294.5	11	79.8	9	1833.6	2	
	5295.5	12	78.4	13	1669.8	1	
	5293.5	13	86.2	7	1972.0	1	
	5297.5	14	82.9	18	1730.9	2	
	5292.5	15	78.3	6	1470.9	2	
	5293.5	16	58.2	8	1609.7	2	
	5292.5	17	65.2	6	1634.4	3	
8	5295.5	1	65.7	13	1168.1	3	1
	5293.5	2	94.6	8	1138.1	1	
	5296.5	3	80.3	14	1520.9	3	
	5292.5	4	93.4	6	1054.3	1	
	5294.5	5	50.3	11	1270.1	2	
	5295.5	6	61.7	13	1678.4	2	
	5292.5	7	70.4	5	1509.4	2	
	5297.5	8	81.0	18	1565.2	3	
	5295.5	9	99.0	13	1015.1	3	
	5297.5	10	84.8	17	1936.2	2	
	5294.5	11	57.7	11	1414.4	3	
	5293.5	12	70.8	7	1795.8	2	
	5297.5	13	89.5	17	1086.6	2	
	5292.5	14	61.2	6	1362.2	1	
	5295.5	15	68.3	13	1829.0	2	
	5293.5	16	53.4	8	1735.2	1	
	5295.5	17	59.0	13	1523.8	2	
	5292.5	18	76.6	6	1726.1	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5297.5	1	67.5	18	1676.6	3	1
	5296.5	2	88.6	14	1328.7	2	
	5294.5	3	74.6	11	1420.3	1	
	5294.5	4	59.2	10	1604.2	2	
	5293.5	5	58.0	8	1987.0	1	
	5294.5	6	54.0	10	1806.7	1	
	5292.5	7	90.9	6	1958.6	1	
	5296.5	8	58.0	16	1742.4	3	
	5292.5	9	62.1	6	1616.7	2	
	5297.5	10	76.1	18	1126.3	3	
	5292.5	11	58.3	6	1673.5	2	
	5296.5	12	59.1	15	1036.4	1	
	5295.5	13	63.9	12	1931.3	2	
	5298.5	14	95.5	19	1210.7	3	
	5296.5	15	71.3	16	1997.1	3	
	5296.5	16	66.4	14	1167.8	2	
	5294.5	17	76.1	9	1658.6	1	
	5297.5	18	84.3	17	1269.9	1	
	5293.5	19	80.9	7	1160.7	2	
10	5296.5	1	88.5	14	1835.9	3	1
	5292.5	2	53.9	6	1858.6	3	
	5293.5	3	60.1	8	1749.4	1	
	5295.5	4	64.3	12	1945.5	1	
	5298.5	5	85.6	20	1268.9	1	
	5295.5	6	83.9	12	1142.0	2	
	5296.5	7	61.9	16	1061.8	1	
	5296.5	8	89.1	16	1425.1	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5300	1	95.5	7	1438.8	2	1
	5300	2	83.2	8	1887.9	3	
	5300	3	70.0	18	1651.7	1	
	5300	4	95.8	18	1696.4	3	
	5300	5	95.1	13	1617.7	2	
	5300	6	64.4	12	1540.2	1	
	5300	7	72.5	9	1940.9	3	
	5300	8	58.3	15	1817.9	2	
	5300	9	91.2	8	1079.7	3	
	5300	10	99.8	14	1324.8	3	
	5300	11	81.6	7	1487.9	3	
	5300	12	67.1	11	1807.2	2	
	5300	13	88.6	17	1568.2	1	
	5300	14	76.5	10	1282.1	3	
	5300	15	52.2	11	1888.0	2	
	5300	16	96.5	20	1162.9	2	
12	5300	1	66.9	14	1287.5	2	0
	5300	2	83.8	12	1920.6	3	
	5300	3	99.3	10	1422.4	1	
	5300	4	99.4	16	1919.2	3	
	5300	5	87.6	7	1781.3	3	
	5300	6	91.2	17	1066.3	1	
	5300	7	65.3	7	1758.0	2	
	5300	8	85.6	19	1731.7	3	
	5300	9	73.9	5	1279.3	3	
	5300	10	70.5	9	1956.4	2	
	5300	11	100.0	13	1369.0	2	
	5300	12	73.9	6	1538.7	2	
	5300	13	87.2	13	1406.0	3	
	5300	14	97.3	5	1434.7	1	
	5300	15	99.7	17	1076.9	1	
	5300	16	79.6	12	1403.5	3	
	5300	17	68.9	8	1612.1	1	
	5300	18	93.6	17	1828.9	3	
	5300	19	57.0	17	1256.3	2	
	5300	20	95.3	7	1656.5	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5300	1	71.5	5	1083.1	3	1
	5300	2	71.6	17	1305.5	1	
	5300	3	63.9	15	1774.6	2	
	5300	4	95.8	6	1541.9	1	
	5300	5	66.2	7	1177.6	2	
	5300	6	83.1	12	1026.6	1	
	5300	7	73.7	14	1307.7	2	
	5300	8	60.1	10	1506.8	2	
	5300	9	51.3	5	1443.9	1	
	5300	10	74.3	13	1404.9	3	
14	5300	1	58.3	11	1540.9	2	1
	5300	2	63.0	18	1708.8	2	
	5300	3	91.3	5	1563.7	2	
	5300	4	95.7	16	1898.7	2	
	5300	5	97.6	16	1741.7	2	
	5300	6	70.0	10	1843.7	1	
	5300	7	50.4	7	1548.2	1	
	5300	8	73.5	14	1370.7	3	
	5300	9	77.3	8	1108.7	1	
	5300	10	80.2	10	1063.0	3	
	5300	11	63.8	9	1895.1	3	
	5300	12	54.9	5	1954.4	2	
	5300	13	85.9	18	1345.8	1	
	5300	14	54.6	15	1231.9	3	
	5300	15	88.8	13	1630.8	3	
	5300	16	62.1	19	1264.0	3	
	5300	17	81.6	17	1795.5	3	
	5300	18	83.0	16	1832.6	3	
	5300	19	72.8	14	1864.9	1	
	5300	20	97.5	16	1467.3	2	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5300	1	86.4	15	1217.7	2	1
	5300	2	84.2	7	1695.1	1	
	5300	3	79.2	12	1964.7	3	
	5300	4	53.9	8	1555.9	1	
	5300	5	57.8	19	1763.0	2	
	5300	6	59.1	13	1536.8	2	
	5300	7	55.4	11	1421.1	2	
	5300	8	98.6	6	1390.0	3	
	5300	9	62.2	9	1960.2	2	
	5300	10	96.2	12	1279.3	1	
	5300	11	55.9	19	1753.9	1	
	5300	12	99.4	6	1361.2	3	
	5300	13	75.3	18	1115.6	2	
	5300	14	81.4	15	1711.0	2	
	5300	15	63.8	14	1684.9	2	
	5300	16	67.8	16	1465.7	1	
	5300	17	63.2	12	1622.8	1	
	5300	18	64.2	12	1877.2	2	
	5300	19	99.5	7	1904.6	3	
16	5300	1	99.6	8	1993.2	3	1
	5300	2	97.4	14	1965.5	3	
	5300	3	94.6	15	1749.1	3	
	5300	4	58.7	18	1207.3	1	
	5300	5	83.7	13	1072.5	1	
	5300	6	67.5	5	1512.5	2	
	5300	7	77.3	18	1459.2	1	
	5300	8	97.5	19	1014.7	1	
	5300	9	72.9	11	1724.1	1	
	5300	10	53.6	12	1724.4	2	
	5300	11	86.2	18	1940.9	2	
	5300	12	77.2	16	1071.7	2	
	5300	13	96.3	7	1252.8	2	
	5300	14	93.2	15	1449.6	2	
	5300	15	57.5	15	1715.8	1	
	5300	16	60.1	13	1945.0	2	
	5300	17	53.1	16	1499.0	2	
	5300	18	90.6	19	1638.6	1	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5300	1	72.7	7	1741.6	3	1
	5300	2	52.6	7	1207.8	2	
	5300	3	60.2	19	1027.9	3	
	5300	4	98.1	8	1684.7	1	
	5300	5	78.4	14	1540.3	2	
	5300	6	67.4	19	1682.3	3	
	5300	7	91.0	8	1162.8	1	
	5300	8	52.0	5	1154.7	2	
	5300	9	81.6	13	1217.1	2	
	5300	10	97.4	15	1684.9	3	
	5300	11	52.7	16	1744.8	2	
	5300	12	72.5	12	1520.1	2	
	5300	13	58.4	17	1700.9	1	
	5300	14	89.2	13	1068.1	2	
	5300	15	86.6	14	1704.0	1	
	5300	16	77.1	17	1649.7	3	
	5300	17	97.8	11	1663.1	3	
18	5300	1	85.9	17	1344.2	1	1
	5300	2	90.1	13	1773.7	1	
	5300	3	63.4	19	1059.4	1	
	5300	4	84.3	13	1512.4	3	
	5300	5	74.8	18	1474.1	2	
	5300	6	83.0	10	1815.4	1	
	5300	7	98.7	18	1778.9	1	
	5300	8	54.3	17	1712.6	3	
	5300	9	81.1	7	1811.7	1	
	5300	10	85.4	17	1126.9	3	
	5300	11	57.2	16	1433.9	3	
	5300	12	84.2	19	1873.0	2	
	5300	13	51.3	17	1809.1	2	
	5300	14	80.7	10	1256.4	2	
	5300	15	91.2	15	1561.2	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5300	1	70.3	18	1305.9	1	1
	5300	2	78.7	11	1081.2	1	
	5300	3	52.3	19	1985.3	3	
	5300	4	73.6	14	1055.4	3	
	5300	5	73.9	19	1896.7	3	
	5300	6	74.4	5	1261.0	3	
	5300	7	63.9	14	1126.7	1	
	5300	8	61.8	8	1603.4	1	
	5300	9	65.3	11	1925.6	3	
	5300	10	81.3	19	1461.3	3	
	5300	11	80.7	14	1361.4	2	
	5300	12	85.2	20	1005.0	1	
	5300	13	89.0	19	1812.4	1	
	5300	14	87.8	13	1785.6	1	
20	5300	1	54.7	15	1598.9	1	1
	5300	2	82.5	15	1742.0	2	
	5300	3	81.0	17	1922.9	3	
	5300	4	51.0	15	1660.4	2	
	5300	5	53.5	17	1528.1	1	
	5300	6	97.5	7	1964.8	2	
	5300	7	61.3	10	1563.0	2	
	5300	8	80.1	12	1571.7	3	
	5300	9	62.7	14	1091.2	3	
	5300	10	99.6	9	1113.5	1	
21	5307.5	1	69.5	6	1717.0	2	1
	5304.5	2	80.0	12	1971.6	2	
	5303.5	3	91.6	16	1407.4	3	
	5301.5	4	54.0	19	1925.7	3	
	5305.5	5	84.2	9	1337.6	1	
	5306.5	6	98.0	7	1658.3	1	
	5303.5	7	92.8	16	1431.7	2	
	5303.5	8	99.8	16	1373.7	2	
	5306.5	9	55.3	7	1203.2	1	
	5302.5	10	92.6	18	1047.8	3	
	5305.5	11	74.0	9	1938.1	1	
	5304.5	12	88.8	12	1019.6	2	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5306.5	1	66.9	7	1780.9	1	1
	5302.5	2	52.4	18	1407.4	2	
	5303.5	3	85.1	15	1145.4	1	
	5303.5	4	95.9	15	1269.0	2	
	5301.5	5	97.9	19	1178.1	1	
	5305.5	6	84.1	9	1659.0	3	
	5302.5	7	96.4	17	1347.2	1	
	5305.5	8	95.6	11	1924.3	1	
	5304.5	9	58.3	12	1366.0	1	
23	5303.5	1	64.8	16	1830.1	1	1
	5307.5	2	67.9	6	1812.5	1	
	5303.5	3	53.9	16	1507.1	1	
	5303.5	4	77.6	15	1452.5	3	
	5304.5	5	86.1	12	1862.5	2	
	5306.5	6	75.4	8	1560.0	2	
	5307.5	7	53.0	6	1764.0	3	
	5301.5	8	79.6	19	1554.9	2	
	5305.5	9	82.6	10	1044.4	1	
	5304.5	10	61.8	12	1133.0	3	
	5306.5	11	67.1	7	1601.7	1	
	5306.5	12	60.9	8	1288.5	2	
	5304.5	13	79.5	12	1400.5	3	
	5305.5	14	73.1	10	1334.9	2	
	5303.5	15	66.2	14	1444.6	2	
24	5305.5	1	73.6	11	1734.7	2	1
	5301.5	2	74.5	19	1303.8	1	
	5303.5	3	78.1	15	1374.0	3	
	5302.5	4	85.3	17	1150.4	3	
	5304.5	5	77.0	12	1849.4	3	
	5307.5	6	96.5	6	1260.9	1	
	5303.5	7	71.8	15	1604.5	1	
	5304.5	8	55.4	13	1308.7	1	
	5302.5	9	98.1	18	1868.2	2	
	5302.5	10	64.4	18	1182.6	3	
	5301.5	11	61.0	20	1537.4	2	
	5303.5	12	70.7	15	1886.8	3	
	5302.5	13	81.7	18	1726.0	1	
	5305.5	14	68.3	11	1434.4	1	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5305.5	1	73.3	11	1879.4	2	1
	5303.5	2	84.8	14	1677.0	1	
	5305.5	3	73.5	9	1744.4	1	
	5303.5	4	98.4	16	1312.9	2	
	5301.5	5	54.9	19	1544.2	2	
	5305.5	6	78.2	9	1358.8	1	
	5307.5	7	89.1	6	1149.3	2	
	5301.5	8	70.8	20	1883.7	2	
	5303.5	9	55.1	14	1504.7	3	
	5305.5	10	75.3	10	1920.2	3	
	5306.5	11	70.2	8	1755.7	3	
	5303.5	12	97.3	14	1033.4	1	
	5304.5	13	78.0	13	1591.4	2	
	5302.5	14	69.9	17	1244.0	1	
	5301.5	15	58.1	19	1306.6	3	
	5302.5	16	96.8	17	1027.8	3	
	5303.5	17	54.0	15	1873.3	3	
	5306.5	18	94.6	8	1461.2	3	
26	5304.5	1	52.0	13	1344.3	3	1
	5307.5	2	92.7	6	1672.8	1	
	5303.5	3	59.4	15	1365.8	2	
	5305.5	4	98.4	10	1387.9	3	
	5301.5	5	80.2	19	1343.9	1	
	5307.5	6	57.3	5	1800.3	3	
	5305.5	7	73.1	9	1662.5	2	
	5306.5	8	64.5	8	1674.5	3	
	5301.5	9	63.4	19	1474.0	1	
	5307.5	10	67.2	6	1068.6	1	
	5303.5	11	70.5	15	1481.9	3	
	5304.5	12	51.2	12	1734.0	1	
	5307.5	13	52.0	6	1503.1	1	
	5302.5	14	69.8	18	1654.3	1	
	5303.5	15	87.9	15	1305.5	3	
	5307.5	16	91.8	5	1155.5	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5307.5	1	63.4	6	1929.1	2	1
	5307.5	2	77.0	6	1672.6	3	
	5302.5	3	75.4	17	1341.9	3	
	5306.5	4	54.5	7	1329.7	2	
	5303.5	5	67.1	16	1119.0	1	
	5306.5	6	60.7	8	1145.6	3	
	5305.5	7	92.4	9	1528.1	1	
	5303.5	8	82.3	14	1141.5	2	
	5302.5	9	67.0	18	1844.3	2	
	5305.5	10	50.9	11	1356.1	2	
	5305.5	11	75.8	10	1107.4	3	
	5302.5	12	50.3	17	1068.3	2	
	5301.5	13	76.5	19	1142.7	2	
	5306.5	14	52.4	8	1990.2	2	
	5301.5	15	72.5	20	1864.6	2	
	5301.5	16	77.1	19	1610.8	2	
	5301.5	17	58.2	19	1393.4	1	
	5303.5	18	54.1	15	1821.2	1	
	5305.5	19	84.0	9	1327.9	1	
	5305.5	20	91.1	11	1454.5	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5302.5	1	80.7	18	1413.1	3	1
	5307.5	2	57.4	6	1101.6	3	
	5305.5	3	67.0	10	1585.2	3	
	5307.5	4	98.8	5	1843.6	3	
	5306.5	5	91.8	7	1997.3	1	
	5306.5	6	66.8	8	1098.6	1	
	5302.5	7	58.6	18	1195.0	3	
	5301.5	8	57.6	19	1342.6	3	
	5305.5	9	87.2	11	1412.9	3	
	5303.5	10	68.4	14	1970.5	1	
	5307.5	11	98.3	6	1617.7	3	
	5303.5	12	87.9	16	1251.8	1	
	5306.5	13	93.9	8	1022.5	3	
	5305.5	14	70.6	11	1537.0	2	
	5304.5	15	88.9	13	1007.9	2	
	5305.5	16	84.9	11	1211.9	3	
	5306.5	17	58.6	8	1009.0	3	
	5306.5	18	90.6	7	1086.4	1	
	5302.5	19	93.1	17	1493.9	1	
	5304.5	20	84.7	13	1778.0	1	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5305.5	1	81.7	11	1720.6	2	1
	5302.5	2	52.2	17	1883.8	3	
	5302.5	3	82.4	18	1652.9	3	
	5302.5	4	86.9	18	1402.4	3	
	5303.5	5	86.3	15	1410.8	3	
	5303.5	6	76.3	14	1391.2	2	
	5302.5	7	57.9	17	1504.1	2	
	5305.5	8	75.2	11	1681.2	1	
	5306.5	9	64.6	7	1189.3	3	
	5302.5	10	91.6	18	1573.7	3	
	5305.5	11	60.3	9	1850.9	2	
	5305.5	12	63.2	9	1651.3	2	
	5304.5	13	60.8	13	1029.0	1	
	5302.5	14	78.9	17	1673.1	3	
	5304.5	15	62.8	13	1353.1	3	
	5305.5	16	82.7	11	1297.9	3	
	5302.5	17	66.0	17	1186.3	1	
30	5302.5	1	63.1	18	1157.4	3	1
	5303.5	2	54.5	16	1272.8	2	
	5305.5	3	86.7	11	1921.1	2	
	5304.5	4	61.3	13	1817.1	3	
	5306.5	5	76.9	7	1968.5	2	
	5303.5	6	92.6	14	1996.9	1	
	5305.5	7	71.9	10	1296.5	2	
	5301.5	8	53.6	19	1909.8	3	
	5302.5	9	78.2	18	1617.4	2	
	5306.5	10	81.5	8	1878.6	1	
	5302.5	11	90.7	18	1360.0	2	
	5303.5	12	85.5	14	1776.9	1	
	5303.5	13	64.8	16	1430.4	2	
	5305.5	14	51.9	9	1908.8	1	
Detection Percentage (%)							96.67

Test Mode		802.11ax HE20				
Frequency		5300 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE40				
Frequency		5310 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	1	898	59	1114	1
2	5310	1	918	58	1089	1
3	5310	1	718	74	1393	1
4	5310	1	618	86	1618	1
5	5310	1	718	74	1393	1
6	5310	1	678	78	1475	1
7	5310	1	758	70	1319	1
8	5310	1	778	68	1285	1
9	5310	1	578	92	1730	1
10	5310	1	878	61	1139	1
11	5310	1	778	68	1285	1
12	5310	1	818	65	1222	1
13	5310	1	718	74	1393	1
14	5310	1	578	92	1730	1
15	5310	1	658	81	1520	1
16	5310	1	2470	22	405	0
17	5310	1	546	97	1832	1
18	5310	1	1453	37	688	1
19	5310	1	2605	21	384	0
20	5310	1	2315	23	432	1
21	5310	1	978	54	1022	1
22	5310	1	1052	51	951	1
23	5310	1	2752	20	363	1
24	5310	1	788	67	1269	1
25	5310	1	1511	35	662	1
26	5310	1	2518	21	397	1
27	5310	1	1061	50	943	1
28	5310	1	763	70	1311	1
29	5310	1	3026	18	330	1
30	5310	1	3014	18	332	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE40				
Frequency		5310 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	1.80	211.60	29	4726	1
2	5310	3.00	198.90	29	5028	1
3	5310	3.90	190.30	25	5255	1
4	5310	2.80	210.10	25	4760	1
5	5310	1.80	164.40	29	6083	1
6	5310	1.70	184.30	26	5426	1
7	5310	3.20	161.00	29	6211	0
8	5310	2.50	155.90	26	6414	1
9	5310	2.80	194.40	26	5144	1
10	5310	1.50	208.60	29	4794	1
11	5310	1.80	212.90	24	4697	1
12	5310	2.30	176.40	26	5669	1
13	5310	1.80	169.30	24	5907	1
14	5310	1.30	223.20	29	4480	1
15	5310	3.00	170.90	26	5851	1
16	5310	2.40	170.80	27	5855	1
17	5310	2.10	198.40	26	5040	1
18	5310	3.10	161.20	23	6203	1
19	5310	3.70	168.00	28	5952	1
20	5310	3.70	200.20	29	4995	1
21	5310	2.80	195.50	24	5115	1
22	5310	2.10	220.10	23	4543	1
23	5310	4.70	153.00	26	6536	1
24	5310	2.40	226.90	27	4407	1
25	5310	2.80	212.10	28	4715	1
26	5310	1.80	181.00	27	5525	1
27	5310	2.10	176.70	25	5659	1
28	5310	4.30	181.10	24	5522	1
29	5310	2.50	178.20	23	5612	1
30	5310	2.90	197.30	27	5068	1
Detection Percentage (%)						96.67

Test Mode		802.11ax HE40				
Frequency		5310 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	8.70	271.40	17	3684.60	1
2	5310	6.50	225.60	17	4432.62	1
3	5310	9.20	426.10	18	2346.87	1
4	5310	8.90	231.30	18	4323.39	1
5	5310	7.70	407.20	16	2455.80	1
6	5310	8.00	397.60	18	2515.09	1
7	5310	6.00	276.00	18	3623.19	1
8	5310	9.60	322.60	17	3099.81	1
9	5310	6.10	480.20	18	2082.47	1
10	5310	6.20	492.80	16	2029.22	1
11	5310	7.90	381.20	16	2623.29	1
12	5310	9.30	332.90	16	3003.91	1
13	5310	7.20	459.70	17	2175.33	1
14	5310	7.40	493.60	17	2025.93	1
15	5310	6.80	251.20	16	3980.89	1
16	5310	8.60	363.20	17	2753.30	1
17	5310	7.80	232.00	18	4310.34	1
18	5310	7.80	347.90	17	2874.39	1
19	5310	7.80	247.00	18	4048.58	1
20	5310	9.30	281.90	16	3547.36	1
21	5310	7.20	377.10	17	2651.82	1
22	5310	6.80	356.00	16	2808.99	1
23	5310	7.50	460.50	16	2171.55	0
24	5310	6.90	382.50	17	2614.38	1
25	5310	6.50	303.80	18	3291.64	1
26	5310	6.40	424.30	18	2356.82	0
27	5310	6.20	393.60	17	2540.65	1
28	5310	7.50	475.80	17	2101.72	1
29	5310	8.10	387.40	18	2581.31	1
30	5310	6.60	252.70	18	3957.26	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE40				
Frequency		5310 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	18.90	211.50	13	4728	1
2	5310	17.30	237.10	15	4218	1
3	5310	14.10	312.90	14	3196	1
4	5310	18.60	238.70	14	4189	1
5	5310	13.00	310.60	16	3220	1
6	5310	16.00	339.70	16	2944	1
7	5310	14.40	269.80	12	3706	1
8	5310	16.90	450.00	16	2222	1
9	5310	11.70	430.50	15	2323	1
10	5310	16.70	224.50	16	4454	1
11	5310	13.70	365.10	16	2739	1
12	5310	12.30	377.60	14	2648	1
13	5310	14.30	361.70	12	2765	1
14	5310	15.20	381.70	12	2620	1
15	5310	14.10	461.50	15	2167	1
16	5310	14.90	203.60	16	4912	1
17	5310	19.40	377.10	14	2652	1
18	5310	19.50	409.50	12	2442	1
19	5310	11.10	499.60	15	2002	1
20	5310	19.80	271.10	13	3689	1
21	5310	15.00	290.50	14	3442	1
22	5310	14.20	417.00	14	2398	1
23	5310	18.00	470.80	13	2124	1
24	5310	11.80	289.00	15	3460	1
25	5310	15.10	204.70	14	4885	1
26	5310	12.30	353.70	14	2827	1
27	5310	17.30	261.50	15	3824	1
28	5310	19.30	325.50	12	3072	1
29	5310	15.10	330.20	14	3028	1
30	5310	15.40	349.40	14	2862	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5296	1	72.6	13	1738.4	2	1
	5298	2	85.3	17	1048.1	3	
	5295	3	79.2	11	1212.5	3	
	5294	4	97.6	8	1993.0	2	
	5298	5	77.9	18	1907.2	2	
	5295	6	69.9	10	1292.2	1	
	5297	7	65.8	15	1304.2	1	
	5294	8	64.7	7	1325.5	1	
	5297	9	71.2	16	1637.7	1	
	5295	10	97.5	9	1368.1	2	
	5293	11	91.9	6	1915.2	2	
2	5296	1	64.5	13	1462.2	1	1
	5294	2	61.9	8	1796.0	2	
	5298	3	68.1	18	1003.9	2	
	5293	4	66.0	6	1153.0	2	
	5294	5	98.7	7	1054.0	3	
	5297	6	50.8	16	1965.2	2	
	5296	7	64.4	12	1009.2	1	
	5298	8	76.0	17	1199.1	3	
	5297	9	89.8	16	1204.8	3	
	5298	10	53.3	18	1249.5	2	
	5296	11	52.8	13	1158.6	3	
	5293	12	60.4	5	1335.3	2	
3	5299	1	82.7	19	1988.7	3	1
	5294	2	70.7	8	1481.1	3	
	5294	3	62.3	8	1601.8	3	
	5296	4	61.6	12	1761.8	2	
	5293	5	73.9	6	1236.9	2	
	5298	6	51.9	17	1209.1	2	
	5297	7	72.8	14	1074.9	2	
	5297	8	56.8	15	1067.4	2	
	5296	9	54.5	12	1799.5	1	
	5295	10	74.1	11	1916.8	2	
	5294	11	93.5	8	1187.1	3	
	5295	12	85.8	10	1799.7	1	
	5296	13	54.1	12	1276.6	3	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5293	1	95.0	6	1209.6	3	1
	5296	2	64.9	13	1316.3	2	
	5294	3	96.1	7	1871.9	2	
	5299	4	59.8	20	1995.5	2	
	5297	5	50.4	14	1381.0	3	
	5294	6	60.3	7	1890.8	3	
	5295	7	95.2	9	1796.9	2	
	5298	8	85.8	17	1581.5	3	
	5296	9	92.6	13	1713.8	3	
5	5295	1	58.5	9	1077.1	3	1
	5298	2	51.4	17	1409.2	3	
	5297	3	52.4	15	1174.5	1	
	5299	4	55.2	20	1234.1	2	
	5299	5	64.4	19	1292.4	1	
	5298	6	80.3	17	1246.2	1	
	5297	7	92.1	15	1934.4	1	
	5296	8	63.2	13	1576.8	3	
	5299	9	56.4	19	1047.0	1	
	5295	10	62.0	11	1319.4	1	
	5294	11	64.1	8	1051.2	1	
	5297	12	70.0	16	1566.5	1	
	5299	13	61.8	19	1684.6	1	
	5299	14	51.0	20	1135.1	3	
	5294	15	90.7	7	1711.9	3	
6	5295	1	57.8	11	1250.3	1	1
	5293	2	81.1	6	1560.4	1	
	5298	3	85.3	17	1266.8	3	
	5298	4	68.1	18	1519.3	2	
	5294	5	93.3	8	1170.0	2	
	5299	6	93.2	19	1173.4	2	
	5296	7	55.0	13	1871.5	2	
	5297	8	89.1	15	1838.2	3	
	5297	9	56.2	15	1001.6	2	
	5298	10	66.0	18	1947.0	3	
	5296	11	84.4	13	1086.7	1	
	5296	12	95.7	13	1190.8	3	
	5296	13	77.3	12	1988.1	1	
	5299	14	61.8	20	1379.3	2	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5297	1	77.4	14	1638.2	3	1
	5297	2	52.8	16	1727.8	1	
	5299	3	95.1	20	1448.5	1	
	5293	4	89.3	6	1489.0	1	
	5295	5	67.8	11	1098.6	1	
	5299	6	69.2	19	1157.9	2	
	5296	7	56.6	12	1112.0	2	
	5297	8	93.5	14	1501.0	3	
	5295	9	69.6	11	1891.9	3	
	5298	10	53.9	17	1188.9	3	
	5296	11	62.5	13	1408.8	1	
	5293	12	75.6	6	1571.0	3	
	5295	13	68.3	9	1495.7	1	
	5295	14	60.1	9	1154.9	1	
	5293	15	54.7	6	1087.5	2	
	5295	16	88.2	11	1646.6	3	
	5294	17	69.7	7	1750.7	1	
8	5295	1	58.3	11	1970.6	3	1
	5299	2	80.8	19	1274.8	1	
	5297	3	99.8	16	1997.5	2	
	5296	4	98.7	13	1815.0	1	
	5295	5	75.2	10	1279.9	3	
	5295	6	61.1	10	1218.0	2	
	5295	7	56.1	10	1615.7	1	
	5295	8	93.2	9	1105.1	1	
	5294	9	59.1	8	1584.9	3	
	5293	10	63.9	6	1297.2	1	
	5295	11	97.0	9	1102.6	3	
	5298	12	68.7	18	1065.9	1	
	5298	13	87.0	18	1565.9	2	
	5297	14	82.4	16	1801.7	1	
	5297	15	68.7	14	1442.0	1	
	5293	16	70.9	6	1176.9	1	
	5298	17	69.4	18	1599.4	2	
	5297	18	92.6	15	1822.7	2	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5295	1	91.1	10	1950.1	2	1
	5298	2	76.2	17	1169.1	3	
	5299	3	87.5	19	1383.3	2	
	5293	4	86.8	6	1877.1	2	
	5295	5	96.1	9	1533.9	1	
	5294	6	95.8	7	1573.5	1	
	5297	7	77.7	15	1687.5	1	
	5298	8	91.1	18	1544.9	1	
	5293	9	64.5	5	1803.5	1	
	5295	10	77.2	9	1861.2	3	
	5297	11	99.5	15	1144.6	2	
	5297	12	68.8	14	1976.7	2	
	5298	13	66.7	17	1820.0	1	
	5295	14	68.8	10	1973.7	1	
	5299	15	83.6	20	1667.7	2	
	5295	16	56.3	10	1332.5	2	
	5296	17	69.1	13	1694.1	3	
	5296	18	90.0	13	1695.9	3	
	5295	19	70.7	9	1863.0	3	
10	5298	1	98.1	18	1370.9	2	1
	5297	2	86.5	15	1030.9	3	
	5298	3	67.1	17	1507.3	2	
	5295	4	76.6	11	1009.5	2	
	5295	5	82.7	11	1553.2	2	
	5297	6	91.3	14	1107.3	3	
	5294	7	58.4	7	1745.8	3	
	5295	8	62.6	11	1140.4	1	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5310	1	88.8	19	1145.7	3	1
	5310	2	58.4	7	1599.4	2	
	5310	3	59.4	9	1922.0	2	
	5310	4	62.9	10	1019.9	2	
	5310	5	85.6	9	1441.7	3	
	5310	6	51.1	13	1278.8	1	
	5310	7	89.9	18	1982.6	1	
	5310	8	52.4	9	1859.5	2	
	5310	9	70.4	9	1646.5	1	
	5310	10	56.8	6	1242.1	2	
	5310	11	60.0	10	1905.4	2	
	5310	12	81.6	12	1217.3	1	
	5310	13	57.9	5	1390.5	2	
	5310	14	75.8	14	1365.9	3	
	5310	15	82.1	17	1202.0	2	
	5310	16	95.0	11	1142.6	3	
12	5310	1	93.8	12	1074.4	3	1
	5310	2	87.6	11	1372.7	3	
	5310	3	81.0	13	1098.7	3	
	5310	4	86.5	19	1124.5	3	
	5310	5	80.9	13	1492.1	3	
	5310	6	56.4	18	1111.5	3	
	5310	7	69.3	8	1205.2	3	
	5310	8	79.6	14	1105.0	3	
	5310	9	50.7	11	1371.4	1	
	5310	10	68.7	10	1823.9	3	
	5310	11	92.3	8	1968.0	3	
	5310	12	70.7	17	1644.8	3	
	5310	13	82.2	14	1632.0	2	
	5310	14	79.7	19	1546.6	3	
	5310	15	59.9	20	1666.2	3	
	5310	16	93.2	14	1462.3	2	
	5310	17	76.1	13	1773.2	3	
	5310	18	70.6	5	1960.5	1	
	5310	19	93.7	12	1774.6	3	
	5310	20	98.1	10	1504.4	3	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5310	1	54.2	13	1219.9	1	1
	5310	2	63.9	14	1168.1	2	
	5310	3	58.0	14	1400.2	2	
	5310	4	77.6	11	1461.8	2	
	5310	5	78.8	7	1265.4	3	
	5310	6	50.3	14	1359.5	1	
	5310	7	56.5	9	1190.1	2	
	5310	8	67.9	13	1220.8	1	
	5310	9	72.0	14	1577.6	1	
	5310	10	62.0	20	1144.7	3	
14	5310	1	62.8	13	1906.2	3	0
	5310	2	93.9	20	1547.9	2	
	5310	3	69.1	19	1026.0	3	
	5310	4	81.1	16	1894.8	1	
	5310	5	77.4	20	1962.7	3	
	5310	6	83.1	18	1564.3	2	
	5310	7	93.7	12	1375.6	2	
	5310	8	93.9	16	1534.1	3	
	5310	9	56.8	9	1880.8	1	
	5310	10	77.6	15	1829.0	3	
	5310	11	82.6	10	1838.6	2	
	5310	12	99.0	15	1933.4	1	
	5310	13	67.0	19	1289.7	1	
	5310	14	68.4	11	1626.3	1	
	5310	15	50.8	19	1809.6	2	
	5310	16	56.0	11	1064.6	2	
	5310	17	67.6	13	1326.9	3	
	5310	18	68.2	6	1590.6	1	
	5310	19	80.5	16	1667.0	2	
	5310	20	58.9	14	1318.9	1	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5310	1	83.5	6	1944.2	1	1
	5310	2	73.7	16	1988.7	1	
	5310	3	80.2	16	1737.8	1	
	5310	4	70.6	15	1086.2	1	
	5310	5	63.2	17	1928.5	1	
	5310	6	94.3	9	1417.5	2	
	5310	7	89.3	8	1694.0	2	
	5310	8	78.5	6	1437.4	2	
	5310	9	91.9	13	1203.5	1	
	5310	10	54.5	20	1815.8	2	
	5310	11	89.6	6	1155.5	2	
	5310	12	96.5	20	1370.5	3	
	5310	13	68.1	10	1248.6	1	
	5310	14	97.6	20	1965.0	2	
	5310	15	50.7	19	1785.1	1	
	5310	16	97.6	6	1383.9	1	
	5310	17	76.3	13	1823.8	1	
	5310	18	77.0	18	1597.7	3	
	5310	19	79.6	20	1458.2	3	
16	5310	1	74.2	14	1907.4	3	0
	5310	2	60.2	11	1979.3	2	
	5310	3	57.2	10	1647.5	1	
	5310	4	67.9	8	1284.9	1	
	5310	5	83.8	13	1921.4	2	
	5310	6	52.0	9	1331.5	2	
	5310	7	88.6	15	1297.1	2	
	5310	8	59.9	18	1844.7	3	
	5310	9	82.0	6	1872.3	3	
	5310	10	60.4	7	1015.8	2	
	5310	11	56.9	10	1273.5	2	
	5310	12	84.8	13	1858.2	2	
	5310	13	73.1	6	1677.1	3	
	5310	14	92.1	17	1109.3	2	
	5310	15	52.4	7	1327.3	2	
	5310	16	52.8	10	1081.7	1	
	5310	17	65.7	17	1603.8	1	
	5310	18	80.9	17	1376.6	1	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5310	1	91.1	17	1678.1	2	1
	5310	2	72.1	16	1476.6	1	
	5310	3	55.6	13	1180.2	3	
	5310	4	71.9	8	1876.1	3	
	5310	5	66.8	15	1000.6	3	
	5310	6	55.9	7	1414.2	3	
	5310	7	96.9	17	1843.2	2	
	5310	8	80.6	17	1264.9	1	
	5310	9	50.0	8	1913.8	2	
	5310	10	87.6	18	1716.1	2	
	5310	11	80.4	9	1362.1	1	
	5310	12	57.1	18	1762.0	3	
	5310	13	84.2	5	1909.5	1	
	5310	14	61.2	14	1673.5	2	
	5310	15	79.4	12	1929.2	3	
	5310	16	69.7	20	1818.9	3	
	5310	17	96.4	5	1303.3	2	
18	5310	1	78.4	16	1652.3	2	1
	5310	2	99.6	8	1367.1	3	
	5310	3	83.4	15	1642.6	2	
	5310	4	84.8	6	1731.4	2	
	5310	5	87.4	5	1181.6	3	
	5310	6	73.9	13	1575.8	2	
	5310	7	80.9	15	1541.6	3	
	5310	8	65.0	15	1575.5	1	
	5310	9	91.5	14	1428.0	1	
	5310	10	65.7	11	1260.2	3	
	5310	11	55.5	16	1811.7	1	
	5310	12	94.6	19	1573.0	3	
	5310	13	88.6	16	1855.0	2	
	5310	14	53.4	14	1089.7	3	
	5310	15	76.1	5	1008.4	2	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5310	1	51.0	9	1140.9	3	0
	5310	2	62.0	17	1981.0	1	
	5310	3	80.4	16	1449.4	3	
	5310	4	91.3	11	1732.9	2	
	5310	5	56.4	6	1118.6	3	
	5310	6	77.0	7	1458.4	3	
	5310	7	87.3	9	1750.2	3	
	5310	8	89.3	8	1612.3	2	
	5310	9	89.8	11	1004.1	1	
	5310	10	86.3	13	1517.9	2	
	5310	11	61.2	14	1402.5	2	
	5310	12	53.9	12	1980.4	2	
	5310	13	77.7	7	1792.2	2	
	5310	14	76.7	7	1819.3	3	
20	5310	1	74.5	5	1211.9	1	1
	5310	2	50.8	10	1317.8	1	
	5310	3	53.3	8	1312.7	3	
	5310	4	84.6	15	1283.9	2	
	5310	5	91.1	9	1829.4	2	
	5310	6	69.4	7	1296.7	1	
	5310	7	84.4	10	1186.8	1	
	5310	8	64.2	10	1844.9	1	
	5310	9	84.5	14	1767.7	3	
	5310	10	56.8	6	1590.7	2	
21	5322	1	95.6	17	1367.4	1	1
	5323	2	80.5	15	1918.5	1	
	5323	3	60.1	14	1904.4	2	
	5325	4	51.3	11	1496.7	2	
	5325	5	99.7	10	1672.1	2	
	5327	6	82.9	6	1646.7	2	
	5327	7	91.4	5	1597.3	1	
	5325	8	85.1	11	1454.7	2	
	5321	9	83.6	19	1983.3	1	
	5323	10	95.9	14	1664.9	2	
	5327	11	71.5	6	1977.8	2	
	5324	12	91.7	12	1628.1	2	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5323	1	93.7	16	1324.3	3	1
	5325	2	74.6	10	1719.7	3	
	5326	3	78.6	8	1352.2	2	
	5323	4	63.2	14	1151.1	1	
	5326	5	86.1	8	1977.1	2	
	5323	6	68.5	15	1819.1	2	
	5323	7	86.0	15	1729.7	1	
	5324	8	98.0	12	1374.2	3	
	5323	9	84.7	15	1551.9	1	
23	5322	1	68.1	18	1021.7	3	1
	5325	2	67.9	11	1203.0	3	
	5326	3	51.2	8	1363.8	2	
	5326	4	99.7	7	1373.0	2	
	5324	5	51.9	12	1247.3	1	
	5327	6	65.0	5	1562.2	2	
	5327	7	67.8	6	1285.3	1	
	5323	8	71.3	16	1675.5	1	
	5327	9	59.7	6	1788.4	1	
	5326	10	89.2	8	1766.7	2	
	5322	11	78.2	17	1907.3	2	
	5324	12	84.2	12	1058.8	3	
	5325	13	66.1	9	1212.6	2	
	5321	14	76.6	20	1879.4	3	
	5326	15	62.0	8	1168.5	1	
24	5325	1	77.5	10	1263.4	3	1
	5323	2	53.6	16	1000.7	3	
	5321	3	66.6	19	1576.1	2	
	5327	4	73.8	6	1491.7	1	
	5325	5	57.8	10	1542.9	2	
	5321	6	84.9	20	1754.2	1	
	5322	7	86.8	18	1851.0	2	
	5322	8	80.3	17	1157.4	2	
	5324	9	94.8	13	1028.1	2	
	5322	10	90.8	17	1593.0	1	
	5323	11	82.9	16	1558.3	3	
	5321	12	75.7	19	1337.4	1	
	5326	13	58.1	7	1409.7	1	
	5321	14	76.2	19	1966.8	2	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5324	1	64.7	13	1990.3	3	1
	5325	2	55.9	10	1449.8	1	
	5327	3	64.4	5	1113.5	2	
	5327	4	80.6	6	1399.7	3	
	5327	5	93.0	5	1986.9	1	
	5323	6	84.4	15	1687.3	1	
	5325	7	86.0	9	1509.4	1	
	5322	8	89.6	17	1560.9	1	
	5321	9	94.2	19	1070.4	3	
	5326	10	100.0	8	1636.7	2	
	5324	11	97.5	12	1748.8	1	
	5324	12	63.1	13	1656.5	1	
	5321	13	53.6	19	1532.3	3	
	5326	14	99.4	7	1389.5	3	
	5326	15	80.3	7	1727.0	1	
	5323	16	65.3	16	1678.8	2	
	5326	17	80.5	7	1722.2	2	
	5322	18	76.5	17	1972.8	3	
26	5326	1	88.1	8	1586.0	2	1
	5324	2	60.2	12	1631.2	1	
	5327	3	54.5	6	1559.2	3	
	5322	4	61.0	18	1874.2	3	
	5325	5	50.3	11	1596.0	1	
	5321	6	83.0	19	1496.4	3	
	5322	7	82.0	18	1967.6	1	
	5323	8	61.8	14	1400.1	2	
	5322	9	74.5	17	1219.0	2	
	5327	10	83.5	6	1774.4	1	
	5325	11	81.2	9	1623.7	1	
	5325	12	79.4	10	1828.6	3	
	5325	13	95.3	10	1635.0	1	
	5326	14	57.0	7	1442.3	2	
	5324	15	69.2	13	1412.0	3	
	5325	16	58.6	11	1703.2	1	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5322	1	95.4	18	1367.4	1	1
	5323	2	84.5	16	1700.0	1	
	5326	3	87.4	8	1279.9	1	
	5325	4	86.0	11	1704.4	1	
	5321	5	73.5	20	1306.9	1	
	5325	6	92.9	11	1736.1	3	
	5322	7	53.5	18	1869.1	3	
	5322	8	54.9	17	1137.5	3	
	5324	9	71.3	12	1417.5	1	
	5323	10	69.2	16	1464.3	3	
	5323	11	67.0	14	1832.5	2	
	5322	12	63.7	18	1871.5	2	
	5325	13	93.8	11	1828.8	3	
	5327	14	82.7	6	1188.0	3	
	5325	15	92.7	9	1615.3	1	
	5322	16	62.6	18	1247.4	2	
	5322	17	88.0	18	1168.3	2	
	5326	18	69.9	8	1077.1	2	
	5325	19	52.3	9	1699.9	2	
	5325	20	88.7	10	1170.6	3	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5325	1	81.2	11	1747.8	1	1
	5324	2	92.8	13	1323.6	3	
	5327	3	53.4	5	1909.9	2	
	5324	4	63.5	12	1937.3	3	
	5321	5	50.2	19	1928.0	2	
	5324	6	99.3	13	1490.5	1	
	5325	7	74.4	9	1342.6	1	
	5325	8	84.0	10	1140.0	2	
	5325	9	97.3	11	1151.3	1	
	5325	10	50.7	10	1631.4	3	
	5325	11	69.2	10	1262.1	2	
	5326	12	79.6	7	1776.7	3	
	5327	13	76.3	6	1532.2	1	
	5327	14	90.9	6	1457.9	1	
	5325	15	84.9	10	1622.6	3	
	5321	16	59.7	20	1232.7	3	
	5322	17	77.1	17	1439.4	1	
	5325	18	50.2	10	1427.5	1	
	5325	19	65.7	11	1084.7	2	
	5323	20	84.1	14	1065.4	3	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5327	1	70.3	5	1236.9	1	1
	5324	2	97.7	12	1534.1	1	
	5323	3	50.6	14	1545.7	3	
	5323	4	99.8	15	1617.9	2	
	5324	5	60.6	12	1166.2	1	
	5322	6	79.8	17	1021.4	2	
	5325	7	96.8	10	1133.5	3	
	5327	8	70.9	5	1876.3	2	
	5325	9	55.1	9	1799.4	1	
	5322	10	53.0	17	1536.4	1	
	5327	11	62.2	6	1186.8	2	
	5327	12	57.5	6	1695.5	2	
	5326	13	53.8	8	1164.1	1	
	5326	14	90.8	8	1966.0	1	
	5327	15	58.2	6	1568.0	3	
	5325	16	96.1	9	1750.5	1	
	5323	17	70.4	14	1672.7	2	
30	5325	1	81.8	11	1532.0	1	1
	5324	2	98.9	13	1438.9	3	
	5326	3	71.2	8	1356.9	3	
	5325	4	88.4	10	1687.6	1	
	5327	5	53.1	6	1433.8	3	
	5325	6	71.7	9	1716.5	3	
	5321	7	51.4	19	1472.1	3	
	5327	8	83.9	6	1045.2	1	
	5323	9	61.4	16	1239.2	1	
	5324	10	98.6	12	1659.5	1	
	5327	11	84.2	6	1597.9	1	
	5323	12	58.0	15	1561.6	1	
	5326	13	71.4	7	1369.2	3	
	5321	14	51.7	20	1907.5	2	
Detection Percentage (%)							90.00

Test Mode		802.11ax HE40				
Frequency		5310 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE80				
Frequency		5290 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	1	3066	18	326	1
2	5290	1	818	65	1222	0
3	5290	1	3066	18	326	1
4	5290	1	818	65	1222	1
5	5290	1	898	59	1114	1
6	5290	1	578	92	1730	1
7	5290	1	3066	18	326	1
8	5290	1	578	92	1730	1
9	5290	1	618	86	1618	1
10	5290	1	538	99	1859	1
11	5290	1	818	65	1222	1
12	5290	1	698	76	1433	1
13	5290	1	738	72	1355	1
14	5290	1	578	92	1730	1
15	5290	1	838	63	1193	1
16	5290	1	1990	27	503	1
17	5290	1	1122	48	891	1
18	5290	1	1104	48	906	1
19	5290	1	2489	22	402	1
20	5290	1	1221	44	819	0
21	5290	1	2950	18	339	1
22	5290	1	881	60	1135	1
23	5290	1	2579	21	388	1
24	5290	1	2283	24	438	1
25	5290	1	2925	19	342	1
26	5290	1	846	63	1182	1
27	5290	1	2525	21	396	1
28	5290	1	1530	35	654	1
29	5290	1	2931	19	341	0
30	5290	1	1003	53	997	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE80				
Frequency		5290 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	3.40	159.50	27	6270	1
2	5290	2.90	183.20	24	5459	1
3	5290	3.80	163.20	26	6127	1
4	5290	4.30	218.80	23	4570	1
5	5290	3.80	216.60	24	4617	1
6	5290	3.50	204.20	23	4897	1
7	5290	3.20	151.90	29	6583	1
8	5290	4.70	173.00	27	5780	1
9	5290	2.40	167.60	25	5967	1
10	5290	3.80	179.30	27	5577	1
11	5290	3.50	201.40	26	4965	1
12	5290	3.90	204.40	27	4892	1
13	5290	3.80	208.40	29	4798	1
14	5290	4.00	213.70	27	4679	1
15	5290	2.90	200.00	28	5000	1
16	5290	1.80	161.90	26	6177	1
17	5290	2.40	213.20	28	4690	1
18	5290	4.10	154.50	23	6472	1
19	5290	4.90	228.20	29	4382	1
20	5290	4.50	166.50	23	6006	0
21	5290	2.50	221.50	27	4515	1
22	5290	4.20	228.50	28	4376	1
23	5290	4.30	187.80	29	5325	1
24	5290	4.40	214.80	28	4655	1
25	5290	3.50	171.00	25	5848	1
26	5290	2.80	169.50	27	5900	1
27	5290	3.10	196.70	23	5084	1
28	5290	3.30	179.10	26	5583	1
29	5290	2.50	217.60	24	4596	1
30	5290	1.90	206.90	25	4833	1
Detection Percentage (%)						96.67

Test Mode		802.11ax HE80				
Frequency		5290 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	6.30	282.20	17	3543.59	1
2	5290	7.10	382.00	18	2617.80	0
3	5290	8.40	257.70	18	3880.48	1
4	5290	8.60	264.60	16	3779.29	1
5	5290	6.30	327.40	17	3054.37	1
6	5290	6.80	387.70	17	2579.31	1
7	5290	9.50	404.80	17	2470.36	1
8	5290	8.80	232.80	16	4295.53	1
9	5290	9.00	352.30	18	2838.49	1
10	5290	6.20	405.60	18	2465.48	1
11	5290	7.80	299.60	16	3337.78	1
12	5290	6.80	204.60	18	4887.59	1
13	5290	7.50	442.20	17	2261.42	1
14	5290	8.80	478.10	18	2091.61	1
15	5290	7.10	460.90	18	2169.67	1
16	5290	7.50	459.10	16	2178.17	1
17	5290	6.90	415.00	16	2409.64	0
18	5290	7.20	217.30	16	4601.93	1
19	5290	10.00	304.90	16	3279.76	1
20	5290	9.40	498.10	16	2007.63	1
21	5290	6.50	445.90	16	2242.66	1
22	5290	9.60	394.20	18	2536.78	0
23	5290	9.80	494.10	16	2023.88	1
24	5290	7.60	365.80	17	2733.73	1
25	5290	7.90	209.60	18	4770.99	1
26	5290	9.50	468.70	17	2133.56	1
27	5290	6.10	279.90	17	3572.70	1
28	5290	6.10	430.00	17	2325.58	1
29	5290	6.50	451.90	17	2212.88	1
30	5290	9.50	414.70	17	2411.38	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE80				
Frequency		5290 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	14.80	279.50	13	3578	1
2	5290	18.90	261.60	12	3823	1
3	5290	13.20	235.60	14	4244	1
4	5290	17.70	495.80	12	2017	1
5	5290	18.40	360.80	13	2772	1
6	5290	17.60	464.60	16	2152	1
7	5290	12.40	412.20	16	2426	1
8	5290	13.80	390.80	15	2559	1
9	5290	19.60	451.00	14	2217	1
10	5290	14.00	378.90	13	2639	1
11	5290	12.30	291.80	12	3427	1
12	5290	18.90	324.10	14	3085	1
13	5290	11.50	332.60	14	3007	0
14	5290	13.20	318.20	12	3143	1
15	5290	16.50	371.30	15	2693	1
16	5290	12.20	446.90	12	2238	1
17	5290	13.60	361.20	13	2769	1
18	5290	17.40	361.30	15	2768	1
19	5290	11.80	395.20	12	2530	1
20	5290	11.40	354.30	14	2822	1
21	5290	13.20	216.30	14	4623	1
22	5290	17.00	398.30	13	2511	0
23	5290	17.90	333.00	13	3003	1
24	5290	12.70	309.50	15	3231	1
25	5290	15.50	250.80	15	3987	0
26	5290	12.10	449.60	13	2224	1
27	5290	13.20	268.30	16	3727	1
28	5290	13.40	465.90	13	2146	1
29	5290	11.80	217.90	15	4589	1
30	5290	15.60	352.30	13	2838	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5253.5	1	50.0	6	1114.2	2	1
	5258.5	2	91.1	18	1896.6	3	
	5258.5	3	96.3	18	1978.7	1	
	5256.5	4	88.4	13	1261.4	3	
	5259.5	5	96.9	19	1516.8	2	
	5255.5	6	70.8	9	1340.1	1	
	5257.5	7	79.2	14	1445.4	2	
	5258.5	8	89.6	18	1529.7	1	
	5255.5	9	72.4	9	1087.2	3	
	5256.5	10	59.5	13	1137.5	2	
	5254.5	11	89.5	8	1805.3	3	
2	5257.5	1	99.5	14	1555.9	1	1
	5258.5	2	63.8	18	1789.6	2	
	5257.5	3	92.6	14	1868.4	3	
	5255.5	4	51.4	9	1574.6	1	
	5255.5	5	85.5	11	1307.5	3	
	5257.5	6	88.4	15	1431.2	3	
	5257.5	7	56.6	15	1143.5	1	
	5255.5	8	62.7	9	1762.0	1	
	5257.5	9	91.8	16	1409.9	2	
	5258.5	10	73.3	17	1564.5	2	
	5253.5	11	90.9	6	1205.9	2	
	5255.5	12	96.5	9	1481.2	3	
3	5255.5	1	55.7	9	1285.7	3	1
	5257.5	2	50.7	16	1741.4	1	
	5258.5	3	67.6	17	1020.4	1	
	5258.5	4	54.7	17	1301.3	3	
	5258.5	5	89.6	17	1643.9	1	
	5255.5	6	72.5	9	1677.4	1	
	5256.5	7	99.3	12	1648.4	3	
	5253.5	8	55.0	6	1876.9	1	
	5253.5	9	82.3	6	1244.8	1	
	5258.5	10	69.6	18	1277.5	1	
	5255.5	11	93.6	9	1903.8	2	
	5258.5	12	86.7	17	1692.9	2	
	5254.5	13	70.6	8	1287.5	2	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5253.5	1	77.9	5	1742.2	1	1
	5255.5	2	75.9	11	1935.9	3	
	5254.5	3	77.0	8	1363.9	3	
	5254.5	4	61.1	8	1513.7	2	
	5256.5	5	68.2	12	1713.8	2	
	5254.5	6	62.7	7	1566.5	1	
	5256.5	7	98.6	12	1895.9	2	
	5258.5	8	55.9	18	1395.4	1	
	5253.5	9	87.5	6	1871.4	3	
5	5258.5	1	50.4	17	1920.7	1	1
	5257.5	2	97.1	16	1691.6	2	
	5257.5	3	70.8	14	1082.9	2	
	5253.5	4	79.0	5	1532.3	1	
	5254.5	5	96.5	7	1887.9	1	
	5257.5	6	61.7	16	1298.0	1	
	5255.5	7	56.6	11	1975.6	2	
	5254.5	8	84.6	7	1896.8	2	
	5257.5	9	59.3	14	1447.5	2	
	5259.5	10	98.4	19	1063.5	2	
	5256.5	11	51.6	12	1323.0	2	
	5255.5	12	82.8	11	1599.8	2	
	5256.5	13	53.5	13	1519.4	3	
	5253.5	14	71.9	6	1470.2	2	
	5256.5	15	59.2	12	1996.9	1	
6	5259.5	1	68.5	20	1546.3	1	1
	5259.5	2	96.5	20	1815.1	1	
	5256.5	3	73.0	12	1653.5	3	
	5259.5	4	84.4	19	1267.2	3	
	5256.5	5	65.9	13	1908.9	1	
	5253.5	6	67.5	6	1987.8	2	
	5258.5	7	74.7	18	1934.0	1	
	5257.5	8	67.9	16	1190.1	3	
	5255.5	9	56.6	11	1669.9	2	
	5257.5	10	70.7	15	1153.9	2	
	5255.5	11	88.8	9	1502.6	3	
	5259.5	12	72.5	19	1707.1	1	
	5255.5	13	84.6	10	1049.7	3	
	5259.5	14	78.5	19	1997.4	3	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5255.5	1	71.5	9	1219.5	3	1
	5257.5	2	86.5	15	1698.3	3	
	5257.5	3	91.4	14	1969.0	2	
	5255.5	4	53.6	9	1267.9	1	
	5253.5	5	78.6	6	1946.1	3	
	5256.5	6	94.6	13	1460.0	3	
	5257.5	7	94.2	15	1319.7	3	
	5257.5	8	60.7	14	1091.6	3	
	5253.5	9	61.5	6	1359.6	1	
	5258.5	10	69.2	18	1009.9	3	
	5254.5	11	81.6	8	1158.4	1	
	5259.5	12	86.6	19	1087.2	1	
	5255.5	13	65.5	11	1559.5	1	
	5257.5	14	94.3	14	1879.0	1	
	5257.5	15	59.3	15	1791.8	3	
	5257.5	16	64.2	16	1130.7	2	
	5258.5	17	76.1	17	1229.3	2	
8	5259.5	1	57.4	20	1239.6	3	1
	5257.5	2	77.0	15	1988.0	2	
	5253.5	3	90.1	5	1327.6	2	
	5255.5	4	93.5	11	1089.6	3	
	5256.5	5	71.3	13	1702.6	2	
	5253.5	6	96.8	6	1418.1	2	
	5257.5	7	50.8	16	1176.4	2	
	5255.5	8	57.3	10	1116.7	1	
	5258.5	9	66.6	17	1278.5	1	
	5256.5	10	50.9	12	1298.6	2	
	5255.5	11	91.1	11	1568.1	3	
	5256.5	12	52.0	13	1645.8	3	
	5257.5	13	96.7	14	1202.7	3	
	5255.5	14	52.6	11	1274.5	1	
	5253.5	15	79.8	6	1700.4	1	
	5255.5	16	77.0	9	1296.7	1	
	5259.5	17	56.9	20	1782.9	2	
	5253.5	18	75.1	5	1136.8	3	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5259.5	1	82.0	20	1907.8	1	1
	5257.5	2	94.5	14	1649.7	3	
	5254.5	3	50.7	8	1407.4	3	
	5255.5	4	87.5	11	1522.3	2	
	5254.5	5	82.9	7	1451.2	2	
	5255.5	6	55.5	10	1272.6	3	
	5254.5	7	63.5	8	1445.5	3	
	5253.5	8	64.3	5	1760.9	1	
	5258.5	9	90.0	17	1154.0	3	
	5258.5	10	90.2	18	1257.3	2	
	5254.5	11	72.5	8	1296.2	2	
	5259.5	12	52.2	19	1857.1	2	
	5257.5	13	53.2	16	1066.0	1	
	5257.5	14	59.5	15	1977.6	3	
	5253.5	15	61.8	6	1008.2	2	
	5259.5	16	72.6	20	1362.8	1	
	5256.5	17	70.8	13	1015.0	3	
	5258.5	18	96.6	18	1665.7	2	
	5257.5	19	72.4	16	1975.4	2	
10	5257.5	1	74.5	16	1319.0	2	1
	5257.5	2	93.0	15	1563.2	1	
	5254.5	3	50.6	8	1046.9	1	
	5258.5	4	56.9	17	1104.2	1	
	5257.5	5	72.9	14	1268.3	2	
	5257.5	6	79.1	16	1006.1	3	
	5254.5	7	80.8	7	1314.4	2	
	5258.5	8	90.8	17	1419.1	3	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5290	1	81.9	19	1954.1	2	1
	5290	2	89.7	15	1111.1	1	
	5290	3	98.3	6	1385.1	2	
	5290	4	87.3	17	1844.5	3	
	5290	5	55.1	5	1450.2	1	
	5290	6	93.5	16	1770.0	1	
	5290	7	88.8	13	1729.6	3	
	5290	8	53.8	16	1682.6	2	
	5290	9	93.4	8	1473.6	3	
	5290	10	70.8	14	1547.6	1	
	5290	11	65.6	18	1531.8	1	
	5290	12	60.4	6	1462.3	3	
	5290	13	51.1	11	1820.4	3	
	5290	14	72.1	14	1692.2	1	
	5290	15	99.7	6	1349.7	3	
	5290	16	92.5	16	1493.3	2	
12	5290	1	54.9	7	1956.1	2	0
	5290	2	74.3	9	1415.5	1	
	5290	3	99.5	10	1482.5	2	
	5290	4	51.3	14	1763.4	1	
	5290	5	64.9	16	1904.0	1	
	5290	6	50.6	10	1190.2	3	
	5290	7	66.4	6	1661.0	2	
	5290	8	71.0	15	1013.6	1	
	5290	9	57.7	17	1767.2	2	
	5290	10	55.8	12	1076.6	3	
	5290	11	93.0	6	1292.0	1	
	5290	12	52.3	9	1540.7	1	
	5290	13	89.6	13	1947.8	1	
	5290	14	67.0	18	1882.7	3	
	5290	15	66.9	13	1807.7	1	
	5290	16	92.9	13	1412.1	2	
	5290	17	78.4	14	1207.4	1	
	5290	18	84.1	9	1272.1	1	
	5290	19	77.0	8	1109.0	3	
	5290	20	90.8	19	1966.3	1	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5290	1	57.4	11	1580.9	2	1
	5290	2	92.7	14	1100.4	3	
	5290	3	73.8	9	1957.2	3	
	5290	4	99.4	6	1434.5	2	
	5290	5	57.8	7	1075.4	2	
	5290	6	76.8	10	1727.4	2	
	5290	7	89.8	13	1877.2	3	
	5290	8	68.2	10	1672.1	3	
	5290	9	67.4	14	1628.9	2	
	5290	10	79.2	13	1333.2	1	
14	5290	1	57.8	15	1662.1	1	1
	5290	2	64.5	10	1991.4	2	
	5290	3	73.2	18	1142.1	1	
	5290	4	84.3	13	1198.7	1	
	5290	5	88.0	18	1008.9	1	
	5290	6	87.8	7	1750.5	2	
	5290	7	94.3	13	1661.4	3	
	5290	8	67.8	6	1725.9	2	
	5290	9	51.0	6	1303.9	3	
	5290	10	77.4	16	1416.7	3	
	5290	11	93.6	15	1785.7	3	
	5290	12	60.8	17	1069.7	1	
	5290	13	76.8	13	1675.3	3	
	5290	14	62.6	9	1807.1	2	
	5290	15	62.0	18	1587.0	1	
	5290	16	69.5	15	1672.0	1	
	5290	17	93.3	6	1105.4	2	
	5290	18	96.7	5	1712.1	1	
	5290	19	92.2	20	1449.4	2	
	5290	20	67.2	6	1327.7	2	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5290	1	71.7	8	1641.3	2	1
	5290	2	90.1	10	1248.2	1	
	5290	3	57.7	6	1095.4	2	
	5290	4	60.1	11	1527.1	3	
	5290	5	52.2	6	1856.0	2	
	5290	6	63.2	12	1916.4	2	
	5290	7	50.1	11	1298.1	3	
	5290	8	87.7	16	1028.9	1	
	5290	9	92.6	6	1772.1	1	
	5290	10	64.8	15	1037.4	1	
	5290	11	87.5	7	1347.4	3	
	5290	12	70.8	17	1717.2	2	
	5290	13	73.0	7	1169.4	3	
	5290	14	57.8	13	1003.1	3	
	5290	15	82.1	17	1241.9	3	
	5290	16	94.5	12	1792.2	1	
	5290	17	52.7	15	1364.7	3	
	5290	18	70.2	8	1268.4	1	
	5290	19	53.2	12	1361.7	3	
16	5290	1	88.9	11	1117.6	3	1
	5290	2	89.1	12	1405.3	2	
	5290	3	69.4	20	1222.1	2	
	5290	4	53.4	14	1292.2	1	
	5290	5	98.1	11	1548.9	1	
	5290	6	88.7	9	1612.9	3	
	5290	7	84.5	9	1017.5	1	
	5290	8	55.7	15	1879.7	3	
	5290	9	72.5	5	1055.9	1	
	5290	10	63.0	19	1945.6	3	
	5290	11	76.1	7	1557.4	3	
	5290	12	82.8	7	1768.0	2	
	5290	13	80.4	13	1160.1	2	
	5290	14	58.6	14	1765.5	3	
	5290	15	97.2	14	1567.1	1	
	5290	16	74.0	8	1595.5	3	
	5290	17	86.0	11	1311.4	2	
	5290	18	68.7	19	1858.5	2	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5290	1	73.9	14	1444.1	2	1
	5290	2	70.9	8	1611.1	3	
	5290	3	87.4	8	1130.5	3	
	5290	4	70.2	14	1007.6	3	
	5290	5	76.9	17	1049.4	3	
	5290	6	66.0	8	1222.2	2	
	5290	7	91.4	17	1345.7	2	
	5290	8	90.5	16	1403.3	3	
	5290	9	69.7	6	1327.4	1	
	5290	10	92.2	19	1176.3	2	
	5290	11	75.5	5	1018.6	2	
	5290	12	99.8	13	1381.5	1	
	5290	13	54.5	8	1054.8	1	
	5290	14	55.1	17	1919.7	3	
	5290	15	71.0	7	1822.6	1	
	5290	16	59.8	6	1610.8	3	
	5290	17	72.6	9	1548.5	1	
18	5290	1	69.4	7	1493.6	2	1
	5290	2	83.4	16	1553.8	2	
	5290	3	93.5	6	1647.8	3	
	5290	4	74.5	12	1962.3	2	
	5290	5	64.8	19	1632.7	3	
	5290	6	63.9	9	1177.3	2	
	5290	7	56.7	10	1010.2	3	
	5290	8	76.0	20	1719.4	3	
	5290	9	70.5	6	1764.1	1	
	5290	10	50.0	19	1635.3	1	
	5290	11	55.4	9	1079.1	1	
	5290	12	55.2	6	1796.9	1	
	5290	13	65.6	14	1931.0	1	
	5290	14	95.6	9	1987.6	3	
	5290	15	90.7	9	1110.5	2	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5290	1	76.1	17	1004.3	1	1
	5290	2	63.0	12	1317.7	3	
	5290	3	71.7	17	1627.8	3	
	5290	4	77.1	12	1867.4	2	
	5290	5	83.3	9	1545.2	1	
	5290	6	60.7	20	1995.0	2	
	5290	7	86.4	20	1076.6	1	
	5290	8	76.6	12	1138.7	3	
	5290	9	79.2	18	1765.8	3	
	5290	10	73.4	13	1165.7	3	
	5290	11	51.3	10	1779.5	2	
	5290	12	90.9	18	1121.1	2	
	5290	13	85.3	12	1327.3	1	
	5290	14	99.9	13	1005.3	1	
20	5290	1	99.8	10	1538.8	3	1
	5290	2	69.6	13	1073.0	3	
	5290	3	69.4	8	1781.9	1	
	5290	4	98.3	6	1378.8	2	
	5290	5	90.4	20	1631.6	1	
	5290	6	51.2	13	1655.7	3	
	5290	7	73.7	6	1478.5	2	
	5290	8	92.4	9	1229.4	3	
	5290	9	92.4	14	1339.9	2	
	5290	10	86.4	20	1543.8	3	
21	5324.5	1	83.5	9	1976.0	3	1
	5322.5	2	77.0	14	1425.4	2	
	5325.5	3	50.3	7	1093.7	1	
	5320.5	4	90.1	19	1203.7	3	
	5322.5	5	60.7	16	1517.2	1	
	5320.5	6	75.1	19	1186.3	2	
	5326.5	7	81.9	6	1960.0	1	
	5324.5	8	83.7	11	1348.9	1	
	5320.5	9	89.1	19	1832.5	1	
	5322.5	10	52.6	15	1831.6	2	
	5323.5	11	55.3	12	1203.1	1	
	5321.5	12	60.4	17	1139.2	3	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5324.5	1	55.1	10	1818.9	3	1
	5324.5	2	52.0	11	1056.4	3	
	5324.5	3	81.3	11	1111.2	1	
	5323.5	4	59.7	13	1438.0	2	
	5326.5	5	97.4	5	1071.3	3	
	5322.5	6	83.1	16	1087.3	3	
	5322.5	7	58.5	14	1741.6	2	
	5326.5	8	69.7	6	1510.1	2	
	5321.5	9	94.5	17	1072.0	2	
23	5322.5	1	82.0	15	1497.5	1	1
	5323.5	2	63.8	13	1682.1	2	
	5322.5	3	81.6	15	1305.8	2	
	5325.5	4	77.6	7	1160.5	2	
	5326.5	5	64.5	6	1008.4	1	
	5324.5	6	51.5	11	1096.3	2	
	5324.5	7	50.4	11	1154.3	1	
	5324.5	8	55.1	9	1815.8	1	
	5324.5	9	97.0	10	1977.5	2	
	5324.5	10	67.3	11	1677.4	2	
	5325.5	11	84.7	8	1983.6	2	
	5321.5	12	81.5	18	1767.1	1	
	5323.5	13	79.0	12	1249.6	1	
	5320.5	14	67.5	19	1732.3	2	
	5325.5	15	70.9	8	1558.7	2	
24	5324.5	1	95.6	9	1004.0	1	1
	5321.5	2	51.7	18	1767.7	1	
	5324.5	3	86.6	11	1225.5	1	
	5324.5	4	69.9	11	1571.7	3	
	5325.5	5	89.7	7	1301.8	1	
	5324.5	6	64.4	9	1247.6	1	
	5321.5	7	92.8	17	1837.7	2	
	5325.5	8	72.5	8	1295.5	1	
	5325.5	9	75.6	7	1186.6	3	
	5322.5	10	74.6	15	1932.8	3	
	5324.5	11	90.3	9	1093.1	1	
	5321.5	12	53.5	17	1429.6	1	
	5321.5	13	94.6	17	1279.1	2	
	5325.5	14	58.2	7	1531.6	1	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5323.5	1	94.2	12	1804.9	2	1
	5324.5	2	87.2	11	1572.4	1	
	5326.5	3	50.3	6	1269.2	3	
	5325.5	4	54.5	8	1915.7	3	
	5322.5	5	61.8	15	1758.9	3	
	5323.5	6	91.7	12	1705.1	1	
	5326.5	7	83.0	5	1221.8	3	
	5322.5	8	96.0	16	1744.3	1	
	5320.5	9	53.6	20	1797.1	3	
	5322.5	10	76.4	14	1475.1	3	
	5323.5	11	91.1	12	1064.5	3	
	5324.5	12	83.3	10	1172.9	1	
	5323.5	13	62.7	13	1016.5	2	
	5324.5	14	61.2	11	1778.9	1	
	5323.5	15	80.1	12	1625.6	3	
	5326.5	16	68.9	6	1052.0	2	
	5323.5	17	89.5	12	1415.5	1	
	5321.5	18	62.2	18	1729.3	2	
26	5325.5	1	86.7	8	1449.4	2	1
	5325.5	2	58.7	7	1482.9	3	
	5322.5	3	90.2	14	1987.3	3	
	5322.5	4	95.0	14	1849.0	1	
	5324.5	5	72.7	11	1428.3	3	
	5322.5	6	78.1	15	1314.6	3	
	5325.5	7	80.1	7	1385.1	3	
	5323.5	8	59.0	13	1385.2	2	
	5320.5	9	81.7	20	1948.7	2	
	5322.5	10	73.3	14	1600.7	1	
	5322.5	11	98.9	15	1580.8	2	
	5320.5	12	90.4	19	1466.3	1	
	5326.5	13	88.7	6	1707.3	3	
	5321.5	14	64.9	17	1661.0	3	
	5322.5	15	76.0	15	1886.9	1	
	5320.5	16	57.3	19	1997.3	3	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5321.5	1	86.3	17	1902.0	3	1
	5323.5	2	74.3	12	1111.4	3	
	5320.5	3	87.4	19	1057.8	2	
	5323.5	4	83.6	13	1466.6	1	
	5322.5	5	58.3	16	1397.0	3	
	5320.5	6	97.0	20	1016.2	2	
	5322.5	7	82.3	16	1412.0	3	
	5321.5	8	53.8	17	1259.3	1	
	5324.5	9	60.2	10	1268.5	1	
	5322.5	10	64.0	15	1613.3	2	
	5324.5	11	71.5	11	1808.1	1	
	5321.5	12	86.5	18	1967.7	1	
	5320.5	13	57.8	19	1751.7	2	
	5322.5	14	55.7	16	1610.2	1	
	5324.5	15	97.5	10	1786.7	3	
	5323.5	16	60.7	12	1905.5	3	
	5324.5	17	50.1	10	1023.5	2	
	5325.5	18	89.9	8	1439.1	3	
	5326.5	19	73.0	6	1613.7	3	
	5322.5	20	94.9	16	1103.5	2	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5321.5	1	91.4	17	1870.9	2	1
	5325.5	2	51.7	8	1048.1	3	
	5324.5	3	87.4	10	1506.7	2	
	5321.5	4	82.5	17	1685.2	3	
	5324.5	5	81.0	11	1122.5	3	
	5325.5	6	73.0	7	1858.6	3	
	5322.5	7	97.5	15	1776.0	2	
	5321.5	8	79.2	18	1871.0	2	
	5320.5	9	72.9	19	1006.5	2	
	5320.5	10	50.2	19	1460.0	2	
	5323.5	11	65.4	13	1291.3	2	
	5320.5	12	78.7	19	1893.9	2	
	5322.5	13	99.1	15	1819.5	2	
	5322.5	14	61.2	14	1884.3	3	
	5324.5	15	65.8	9	1659.0	2	
	5325.5	16	93.7	7	1124.0	1	
	5323.5	17	96.1	13	1315.5	3	
	5321.5	18	80.0	17	1939.3	3	
	5325.5	19	91.3	7	1666.0	1	
	5321.5	20	86.7	17	1259.7	3	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5326.5	1	50.5	6	1199.8	2	1
	5320.5	2	79.8	19	1261.8	1	
	5325.5	3	51.0	8	1706.5	3	
	5325.5	4	94.3	7	1616.5	3	
	5321.5	5	72.5	18	1105.8	1	
	5321.5	6	67.1	17	1209.8	1	
	5324.5	7	66.6	10	1320.2	2	
	5324.5	8	96.8	11	1989.1	3	
	5324.5	9	92.4	11	1527.6	2	
	5324.5	10	82.2	11	1074.4	1	
	5321.5	11	82.9	17	1311.9	2	
	5323.5	12	56.2	12	1962.9	1	
	5325.5	13	63.7	7	1599.3	1	
	5321.5	14	80.7	17	1823.0	1	
	5325.5	15	63.1	7	1588.9	2	
	5326.5	16	50.9	5	1474.7	1	
	5324.5	17	51.8	11	1496.2	1	
30	5323.5	1	84.8	13	1095.2	1	1
	5322.5	2	65.1	16	1406.9	3	
	5321.5	3	66.2	18	1294.7	3	
	5322.5	4	53.4	14	1428.3	1	
	5326.5	5	60.3	5	1045.3	1	
	5322.5	6	64.7	14	1568.8	3	
	5320.5	7	81.0	19	1484.0	2	
	5322.5	8	65.6	14	1763.0	2	
	5322.5	9	95.2	14	1838.8	3	
	5323.5	10	74.2	12	1026.3	1	
	5324.5	11	80.8	11	1611.4	2	
	5324.5	12	81.2	11	1108.9	3	
	5325.5	13	91.9	8	1913.2	1	
	5326.5	14	98.6	6	1727.6	3	
Detection Percentage (%)							96.67

Test Mode		802.11ax HE80				
Frequency		5290 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

---END---