


ANBERNIC

产品概况

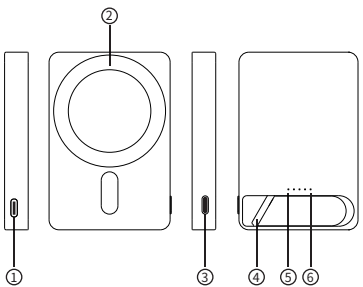

- ① USB-C接口

③ 电源按键

⑤ 无线充指示灯（蓝灯）
- ② 无线充区域

④ 隐藏式支架

⑥ 电量指示灯（白灯）

CX-502LM

为了给您带来更好的使用体验，
在使用产品前请仔细阅读使用说明书，并妥善保管，以便日后参考

自由充电新体验

本产品是一款小巧便携的隐藏式支架无线充移动电源，支持磁吸无线充电(苹果手机)、常规无线充电(其他支持无线充的手机)、有线充电三种充电模式。您不仅可以灵活选择相应充电模式，还可以将其当桌面支架使用，边充边玩，畅享自由充电新体验。

1. 从侧面拨手位抠开支架展开支撑在桌面上，开启支架式充电/使用。
2. 折叠隐藏支架，开启桌面水平充电。

使用移动电源

1. 按键操作
单击电源按键开机，开启无线/有线充电；双击电源按键关机。

2. 磁吸无线充电

(适用于苹果手机支持磁吸无线充功能的手机)开机状态下，将手机磁吸在移动电源的无线充区域，即可开启无线充电。

3. 常规无线充电

(非苹果系列支持无线充的手机)开机状态下，将支持无线充功能的手机正面向上平放在移动电源上，对准移动电源的无线充区域，手机充电符号亮起，即可开始无线充电。

4. 有线充电

连接USB-C充电线，然后单击电源按键开机，即可给手机/平板等设备充电。

给移动电源充电

将充电线插入USB-C接口，即可为移动电源充电。充电时，电量指示灯闪烁；充满电，4颗电量指示灯常亮。

注意：


1. 本产品充电中和充满电时，无线充指示灯不亮。
2. 为保证电池使用寿命，请每三个月至少使用并充电一次。

产品参数

产品名称	磁吸无线充电宝
型号	CX-502LM
USB-C输入	5V3A 9V2.22A MAX 20W
USB-C输出	5V3A 9V2.22A MAX 20W
无线充输出	15W最大
边充边放	USB - C输入：5V=3A 无线充输出：5W
锂电池容量	5000mAh(19.25Wh)
额定容量	3000mAh (5V=2A)
转换效率	≥60%
电池充电限制电压	4.45V
工作温度	0°C-35°C
产品清单	磁吸无线充电宝×1、 充电线×1、安全手册×1

以上参数均来源于振华凌云实验室,实际参数会因产品或其他因素而有差异;图片仅供参考,请以实物为准。

指示灯显示说明



1. 给移动电源充电时

电量	指示灯状态	显示说明
0-25%	☆ ● ● ● ●	第1颗白灯闪烁，第2、3、4颗白灯熄灭，第5颗蓝灯熄灭
25%-50%	○ ☆ ● ● ●	第1颗白灯常亮，第2颗白灯闪烁，第3、4颗白灯熄灭，第5颗蓝灯熄灭
50%-75%	○ ○ ☆ ● ●	第1、2颗白灯常亮，第3颗白灯闪烁，第4颗白灯熄灭，第5颗蓝灯熄灭
75%-99%	○ ○ ○ ☆ ●	第1、2、3颗白灯常亮，第4颗白灯闪烁，第5颗蓝灯熄灭
100%	○ ○ ○ ○ ●	第1、2、3、4颗白灯常亮，第5颗蓝灯熄灭

2. 移动电源给设备充电时(无线状态下)

电量	指示灯状态	显示说明
100%-75%	○ ○ ○ ○ ●	第1、2、3、4颗白灯常亮，第5颗蓝灯常亮
75%-50%	○ ○ ○ ● ●	第1、2、3颗白灯常亮，第4颗白灯熄灭，第5颗蓝灯常亮
50%-25%	○ ○ ● ● ●	第1、2颗白灯常亮，第3、4颗白灯熄灭，第5颗蓝灯常亮
25%-5%	○ ● ● ● ●	第1颗白灯常亮，第2、3、4颗白灯熄灭，第5颗蓝灯常亮
5%-1%	☆ ● ● ● ●	第1颗白灯闪烁，第2、3、4颗白灯熄灭，第5颗蓝灯常亮
0%	● ● ● ● ●	5颗灯全部熄灭

注意：当移动电源给设备充电时，有线状态下无线充指示灯（第5颗灯）蓝灯熄灭。

无线充状态	无线充指示灯状态	显示说明
无线充给手机充电	●	蓝灯常亮
无线充手机移除后	●	蓝灯熄灭
无线充FOD时	☆	蓝灯快闪10s

注意：无线充输出异常或检测到异物(FOD)时，无线充指示灯蓝灯闪烁10s，解除后2s内恢复。

注意事项

01. 请使用原装或者通过认证的数据线。
02. 请勿接触液体。
03. 避免跌落产品。
04. 避免在过高或过低环境温度使用。
05. 请将本产品置于儿童不易接触的地方。
06. 消费者若使用电源适配器充电，则应购买配套使用获得安全认证并满足标准要求的充电器。

重要安全须知

01. 请将本产品存放在阴凉干燥的地方。
02. 请勿将本产品存放在高温或潮湿的环境中。
03. 请勿损坏或刺穿移动电源的外壳。这可能会导致过热、起火或爆炸。
04. 请勿将产品置于高温或火中。勿将移动电源暴露在环境温度超过40°C的环境中，可能导致过热、起火或爆炸。
05. 误用、掉落或过度用力都可能会导致产品损坏。
06. 如果移动电源发出异味、过热或变色或变形，请立即停止使用。
07. 使用非正规制造商生产的电源或充电器可能会导致火灾或人身伤害。
08. 请勿拆卸产品。需要维修或修理时，请将其交给专业的维修人员。重新组装不正确可能导致火灾或人身伤害。
09. 充满电后，请及时将充电器插头拔出，避免长时间充电而损坏电池。
10. 为设备充电时，产品可能会发热。此为正常的操作条件，请勿担心。
11. 正常情况下，电池性能将会在几年内下降。
12. 请勿使用有害化学物质或清洁剂清洁本产品

警告

本产品内置锂电池，请注意以下事项：

01. 浸水后禁止使用。
02. 请在低电量时及时进行充电；如长时间不使用，请每隔3个月将产品开机直至电量耗尽，再将产品电量完全充满，以防电池损坏；建议在适宜的环境温度中使用和储存本产品。
03. 禁止拆解、撞击、挤压或投入火中。若出现严重鼓胀，请勿继续使用。请勿置于高温环境中。若出现续航时间严重缩短，请勿继续使用，交由专业人员维修。
04. 如电池更换不当会有爆炸风险，只能使用相同类型或等效类型的电池，由专业人士进行更换。
05. 电池(电池包或组合电池)不得暴露在诸如日照，火烤或类似过热环境中。
06. 包含锂电池的产品，请与家庭垃圾分开处理。如产品废弃，请投入至指定的回收位置或交环保回收部门处置，切勿随意丢弃。

产品中有害物质的名称及含量

对本产品中有害物质，按部件分类，声明如下。

部件名称	有害物质					
	铅(Pb)	汞(Hg)	镉(Cd)	六价铬(Cr(VI))	多溴联苯(PBB)	多溴二苯醚(PBDE)
印刷电路板及组件*	0	0	0	0	0	0
金属件	0	0	0	0	0	0
其他	0	0	0	0	0	0


本表格依据SJ/T11364的规定编制。某些型号的产品可能不包含表中的部分部件。
0:表示该有害物质在该部件所有均质材料中的含量均在GB/T26572规定的限量要求以下。
X:表示该有害物质至少在该部件的某一均质材料中的含量超出GB/T26572规定的限量要求。标记“X”的部件，皆因全球技术发展水平限制而无法实现有害物质的替代。
*印刷电路板组件包括印刷板及其零部件，电容和连接器等。
在中华人民共和国境内销售的电子信息产品必须标识此标志。圆圈内的数字表示正常使用状态下产品的环保使用期限。

执行标准:GB 4943.1-2022; GB 31241-2022

CE FC RoHS ㉔ ㉚ ㉜ ㉝ Made in China

ANBERNIC

Product Overview

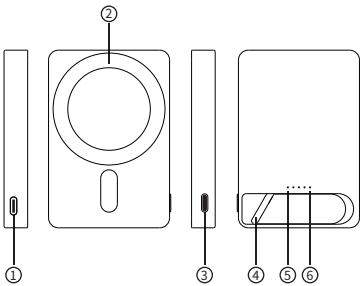

- ① USB-C Port

③ Power Button

⑤ Wireless Charging Indicator (Blue Light)
- ② Wireless Charging

④ Hidden Stand

⑥ Battery Indicator (White Light)

CX-502LM

To provide you with a better user experience,
Please read the instruction manual carefully before use,
and keep it safe for future reference.

A New Experience in Wireless Charging

This product is a compact and portable wireless charging power bank with a hidden stand. It supports three charging modes: magnetic wireless charging (for iPhones), standard wireless charging (for other wireless-compatible phones), and wired charging. You can flexibly choose the appropriate charging mode and also use it as a desktop stand, allowing you to charge while playing, enjoying a new experience in free charging.

1. To use the stand, simply pull the designated area on the side to unfold it and support it on the desktop, enabling stand-style charging and usage.
2. Foldable hidden stand for horizontal desktop charging

Using the Power Bank

1. Button Operation

Press power button once to turn on device and activate wireless/wired charging.Double-click power button to turn off device.

2. Magnetic Wireless Charging

In powered-on state, place the phone magnetically on wireless charging area of the power bank to initiate wireless charging.(Compatible with Apple series phones that support magnetic wireless charging)

3. Standard Wireless Charging

In the powered-on state, lay the phone face up on power bank, aligning it with wireless charging area. Once the phone's charging symbol lights up, wireless charging will begin. (For non-Apple series phones that support wireless charging)

4. Wired Charging

Connect a USB-C charging cable, and press power button to turn on the device, then you can charge your phone, tablet, or other devices.

Charging the Power Bank

Insert charging cable into the USB-C port to charge the power bank. During charging, the power indicator lights will flash; Four power indicator light on when fully charged,

Note：


1. The wireless charging indicator will not light up during charging or when fully charged.
2. To ensure the battery's lifespan, please use and charge the device at least once every three months.

Specifications

Product Name	Magnetic wireless power bank
Model	CX-502LM
USB-C Input	5V3A 9V2.22A MAX 20W
USB-C Output	5V3A 9V2.22A MAX 20W
Wireless Charging Output	15W Max
Charging and Discharging Simultaneously	USB-C Input:5V=3A, Wireless Charging Output:5W
Lithium Battery Capacity	5000mAh(19.25Wh)
Rated Capacity	3000mAh (5V=2A)
Transfer Efficiency	≥60%
Limiting Voltage Of Battery Charging	4.45V
Working Temperature	0°C-35°C
Package List	Lstand Power Bank ×1 Charging Cable ×1 Quick Guide ×1

The parameters above are derived from the laboratory of ZHLU.The actual parameters would be different due to production process and other factors.The image shown here is indicative only.

LED Display Instruction



1. When charging the power bank

Power	Indicator Status	Indication Instruction
0-25%	☆ ● ● ● ●	White light 1st is flashing, white lights 2nd, 3rd, and 4th are off, blue light 5th is on.
25%-50%	○ ☆ ● ● ●	White light 1st is on, white light 2nd is flashing, white lights 3rd and 4th are off, blue light 5th is off.
50%-75%	○ ○ ☆ ● ●	White lights 1st and 2nd are on, white light 3rd is flashing, white light 4th is off, blue light 5th is off.
75%-99%	○ ○ ○ ☆ ●	White lights 1st, 2nd, and 3rd are on, white light 4th is flashing, blue light 5th is off.
100%	○ ○ ○ ○ ●	White lights 1st, 2nd, 3rd, and 4th are on, blue light 5th is off.

2. When the power bank charges the devices
(In wireless status)

Power	Indicator Status	Indication Instruction
100%-75%	○ ○ ○ ○ ●	White lights 1st, 2nd, 3rd, and 4th are on, blue light 5 is on.
75%-50%	○ ○ ○ ● ●	White lights 1st, 2nd, and 3rd are on, white light 4th is off, blue light 5th is on.
50%-25%	○ ○ ● ● ●	White lights 1st and 2nd are on, white lights 3rd and 4th are off, blue light 5th is on.
25%-5%	○ ● ● ● ●	White light 1st is on, white lights 2nd, 3rd, and 4th are off, blue light 5th is on.
5%-1%	☆ ● ● ● ●	White light 1st is flashing, white lights 2nd, 3rd, and 4th are off, blue light 5th is on.
0%	● ● ● ● ●	All 5 lights off.

*Note:When charging the device with a power bank, the wireless charging indicator light (the 5th light) will turn off in wired mode.

Attentions

01. Please use the original or certified charging cable.
02. Do not touch liquid.
03. Avoid dropping the product.
04. Avoid using it in high or low temperature environment.
05. Please keep this product out of reach of children.
06. If consumers use a power adapter for charging,they should purchase a matching power adapter that has obtained CCC certification and meets standard requirements.

Safety Significant Matters

01. Please store this product in a cool and dry place.
02. Do not store this product in a high-temperature or humid environment.
03. Please do not damage or puncture the casing of the power bank.This may cause overheating,fire,or explosion
04. Do not place the product in high temperatures or fire. Avoid exposing the power bank to environments with temperatures exceeding 40°C,as this may result in overheating,fire,or explosion.
05. Misuse,drop or excessive force may cause damage to the product.
06. If the power bank emits any unusual smell,overheats, changes color,or deforms,please stop using it immediately.
07. Using power sources or chargers produced by non-standard manufacturers may result in fire or personal injury
08. Do not disassemble the product.When service or repair is required,please refer it to professional service personnel.Incorrect reassembly could result in fire or personal injury.
09. After fully charging,please unplug the charger plug in a timely manner to avoid damaging the battery due to prolonged charging.
10. When charging the device,the product may heat up. This is normal and should not be cause for concern.
11. Under normal circumstances,battery performance will decline within a few years
12. Do no use harmful chemicals or detergents to clean this product.

Warning

This product is equipped with a built-in lithium battery,and please pay attention to the followings:

- 01.Do not use after being immersed in water.
- 02.Please charge the product in time when the battery is low.To protect the battery when not in use for a long time,please turn on the product every 3 months until the battery power runs out and then fully charge the product.It is recommended to use and store it in a suitable environment.
- 03.It is forbidden to disassemble,hit,squeeze or throw it into fire.If severe swelling occurs,stop using it.Do not place it in a high temperature environment.If the battery life is seriously shortened,stop using it and handle it for professional maintenance.
- 04.There is a risk of explosion if the battery is improperly replaced,and it can only be replaced with a battery of the same or equivalent type by a professional.
- 05.The battery (battery pack or assembled battery)shall not be exposed to overheated environments such as sunlight or fire.
- 06.Products containing lithium batteries should be handled separately from household waste.If the product is disposed of,please put it into the designated recycling locations or hand it over to the environmental protection recycling department for disposal,and cannot discard it at will.

CE FC RoHS ㉔ ㉚ ㉜ ㉝ Made in China

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

—Reorient or relocate the receiving antenna.

—Increase the separation between the equipment and receiver.

—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

—Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device has been evaluated to meet general RF exposure requirement.

The device can be used in portable exposure condition without restriction.