



Please read the manual carefully before using the product

1. Safety Instructions


- 1.Please note that children are at risk of asphyxiation due to entanglement.
- 2.Keep power cables away from the baby at least one meter.
3. Do not allow children to use this product as a toy without supervision.
4. Do not leave the camera in the baby cot or safety fence.
- 5.The baby monitor kit is only a monitoring aid and does not replace the functions and responsibility of guardian supervision.
6. Do not leave your baby unattended or stay lonely at home, babies need constant care and nurturing from adults.
- 7.Do not use this product in an environment where flammable gases may leak, or expose this product to rain or humidity.
- 8.Do not disassemble built-in batteries or expose to fire. Charge in well-ventilated areas.



Danger warning Potential risk of winding lines

- 01 -

2. What's in the Box




Baby Camera x1



Baby Monitor x1




Camera Power Cable x1




Monitor Power Cable x1




Power Adapters x2 (5V/2A)

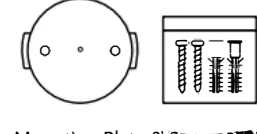

Mounting Plate & Screws x2




Quick Start Guide



Reset pin X 1

- 02 -

3. Product Overview

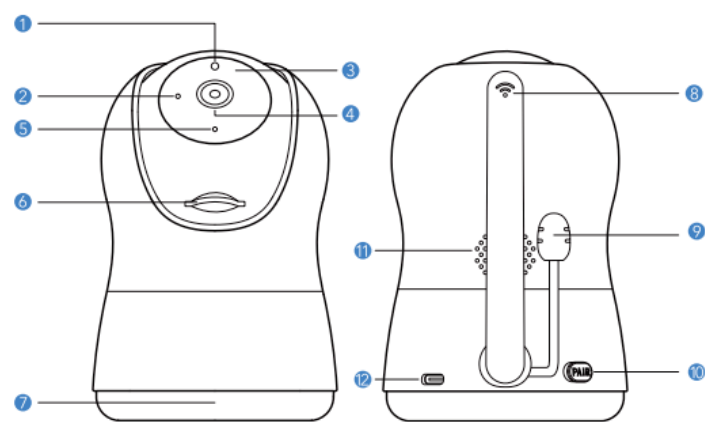


Camera Unit:

- Infrared Sensor
- Status LED
- Infrared Lights
- Camera Lens
- Microphone Array
- TF Card Slot
- Ambient Light
- Antenna
- Temperature Sensor
- Pairing Button
- Speaker
- USB Power Port

Pairing Button (Camera)

- Double-click: Pair with display
- Long press: Pair with app

- 03 -

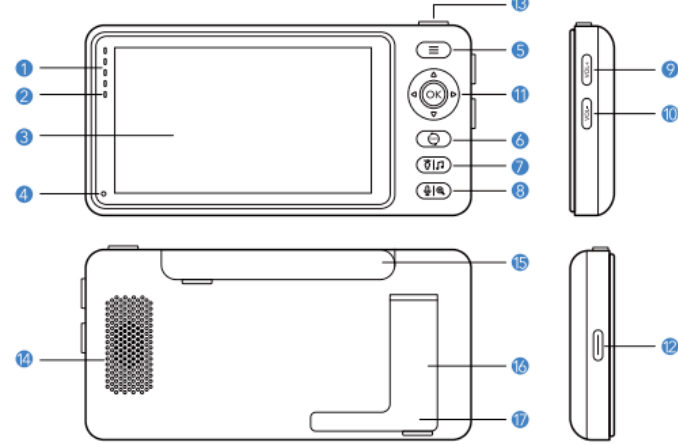

Display Unit:

- Sound Activity Indicator
- Microphone
- Ambient Light/Music Button
- Volume -
- Power Button
- Stand
- Power LED
- Back/Menu Button
- Talk/Zoom Button
- Navigation Buttons
- Speaker
- Reset Port
- Screen
- Camera Switch Button
- Volume +
- USB Power Port
- Antenna

- 04 -

- Power Button**
 - Power On: Long press when off
 - Standby: Short press to toggle screen
 - Power Off: Long press when on

- Menu Button/Back Button**
 - Enter main menu/Short press to return to previous menu.

- Navigation Buttons**
 - In preview mode use this button to control the pan and rotation of the camera.
 - In menu mode use this button to select menu items

- OK Button**
 - Confirm selections/enter submenus.

- Camera Switch**
 - Applying to the situation where multiple cameras are connected
 - Briefly press this key to switch between different cameras. After switching all cameras, it will enter the split-screen preview mode. At this point, press briefly again to return to the first camera image.

- Ambient Light/Music**
 - Short press: Toggle ambient light colors
 - Long press: Activate music player

- Talk/Zoom**
 - Long press: Two-way talk
 - Short press: Zoom (2x→4x→Reset)


- Volume Controls**
 - Adjust volume levels.

- PAIR Pairing Button**
 - Double-click the PAIR button to pair the camera with the monitor
 - Long press the PAIR button to pair the camera with the app


- 05 -

4. Charging and installation method

1. Charging method

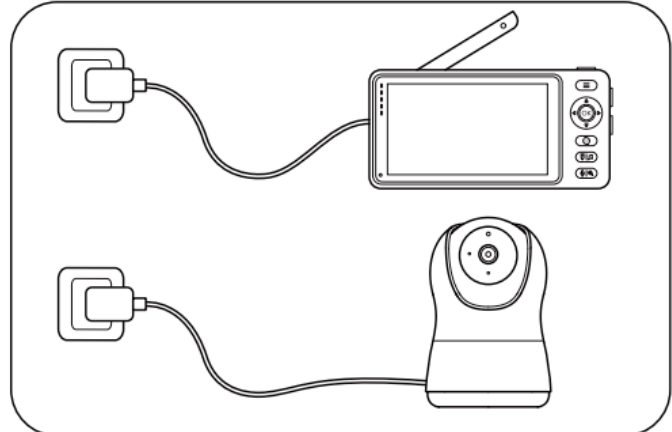


2.1 Installation method

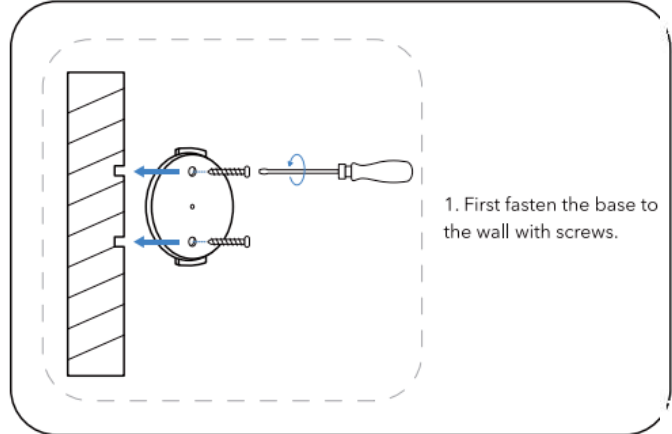

- 06 -

2.2 Installation method

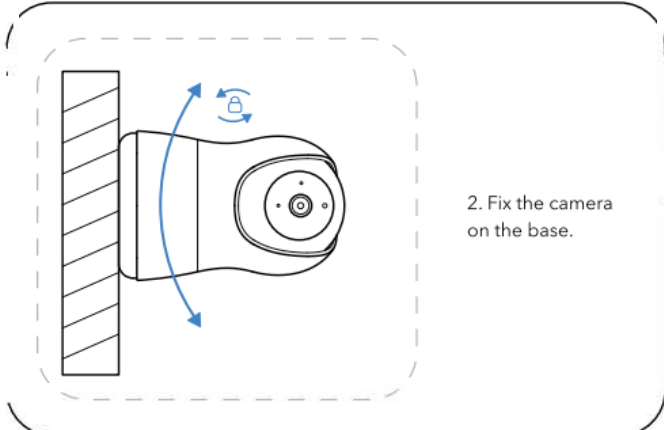

5. APP download




1. Download: Search" Tuya Smart" in the app store or scan the below QR code to download
2. Register: After select the location, you can use email or phone number to register, or use the third party media account to log in.
3. If can not find the App in app store, pls use your phone browser to scan the below QR code to download.

6. Pairing the camera with the app

- 1.Connect your phone with 2.4G WIFI, as the camera doesn't support 5GHz Wi-Fi.
2. Download the App on your phone. Log in with a new account or use an existing account.
3. Open your phone Bluetooth and enable the Bluetooth access permission of the Tuya Smart APP
- 4.Power supply the camera, Long press the Pair Button until hearing a tune "Waiting for W Fi Connection"

- 07 -

- 5.Open Tuya Smart app, it shows "device to be added", then click "Add". (If it does not find the device automatically, you can Press "+" on top right corner, and select "Add Device")
- 6.Confirm your phone used wifi and password, then press"Next".(product only support 2.4G WIFI).
7. After adding successfully press "Done" and app automatically go to monitor status.

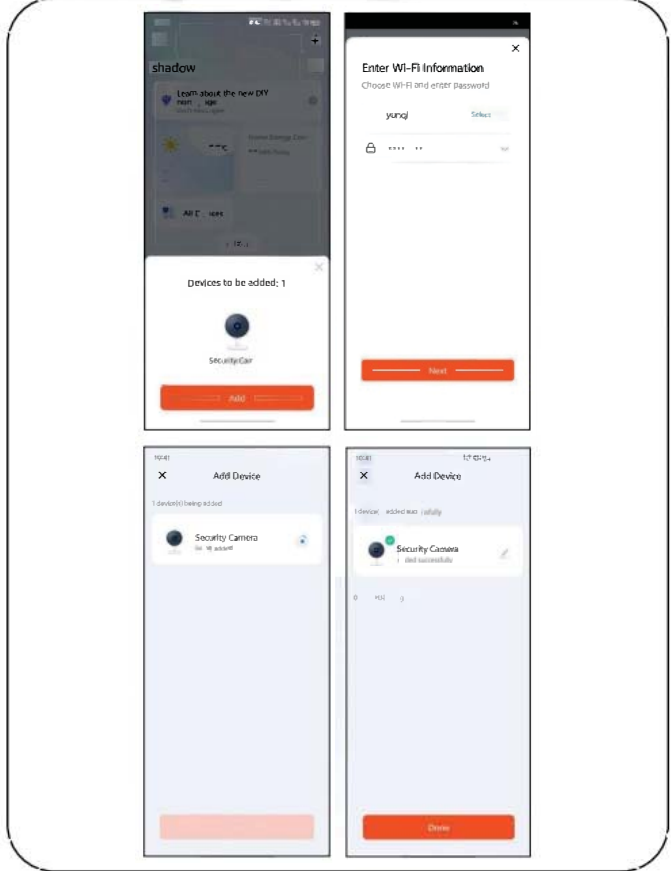


- 08 -

7. Pairing the camera with the monitor


All products have been paired in factory, so need to pair again.
Power on the camera and the monitor, and they will automatically connect. If the connection fails, please follow the steps below to pair. The pairing is distance limited, so make the distance between the camera and the monitor is no more than 100m.

- Unbind the monitor and camera:**
1. Press Menu button on the monitor screen, and select "Camera Management".
2. Select Camera which has been paired.
3. Press OK button to enter the following page, then hold it to unpair the camera.

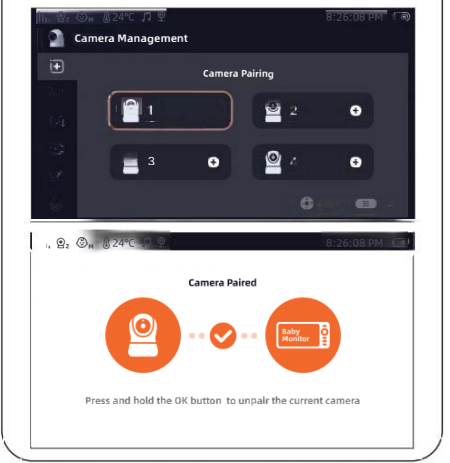



Pair the monitor and camera:

1. Press Menu button on the monitor screen, and select "Camera Management".
2. Select Camera which has been paired.
3. Press OK button to enter the following page, then hold it to unpair the camera.

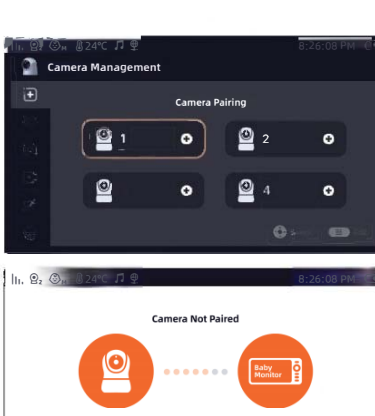


1. Double click the add button on the camera until you hear the pairing tone.
2. Press and hold the add button on the monitor to finish pairing your camera.



8. Monitor Menu Settings

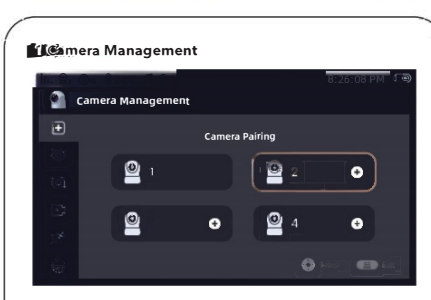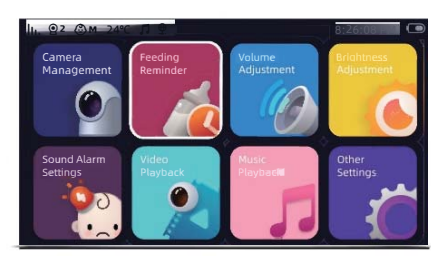


- Pairing: Supports up to 4 cameras
- View Selection: Choose active camera
- Bright: For Adjust Camera brightness
- Recording: Supports 1080P 15FPS
- Motion Alarm: High/Mid/Low/Low sensitivity
- Ambient Light: 7 colors + off

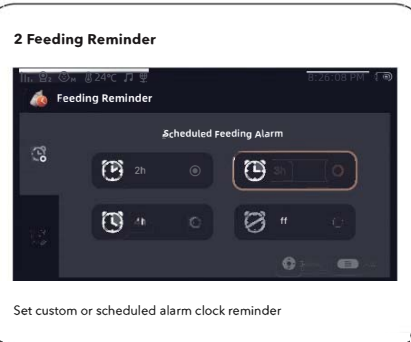



Set custom or scheduled alarm clock reminder

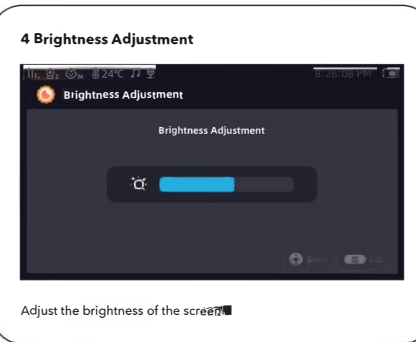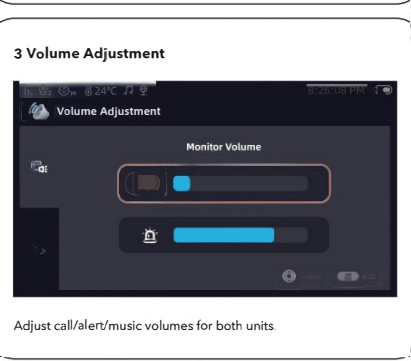


Adjust the brightness of the screen

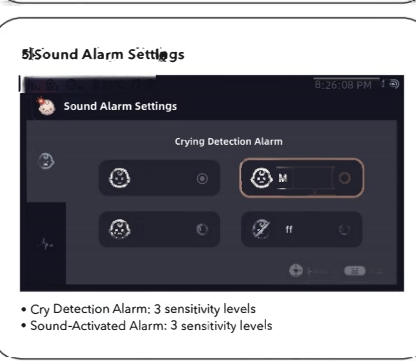

- Crying Detection Alarm: 3 sensitivity levels
- Sleep-Adjusted Alarm: 3 sensitivity levels

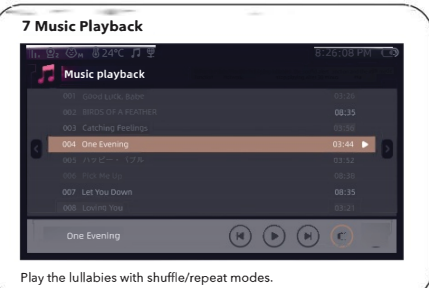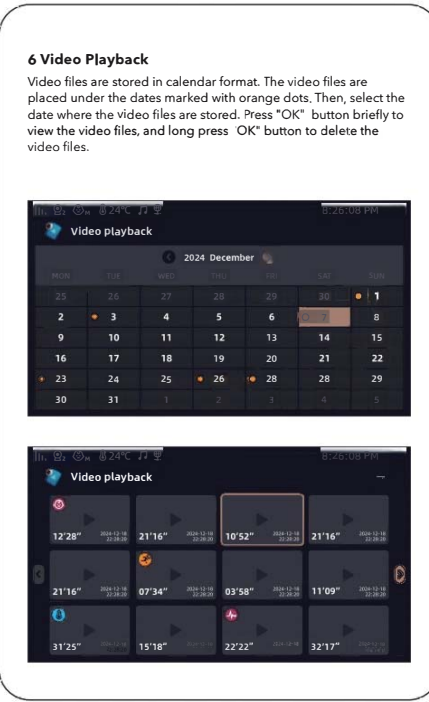

Play the lullabies with shuffle/random modes

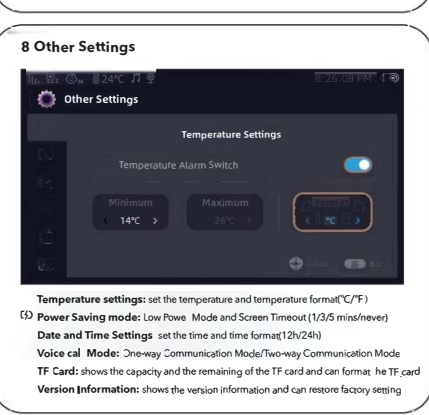

9. Monitor Screen Icons

	Indicates the current signal strength.
	Battery level 1.2.3 represents overcharge protection time (in minutes).
	Indicates camera images will switch alternately on different cameras.
	Displays the ID of the currently previewed camera.
	Indicates a TP card is inserted.
	Shows the ambient temperature of the camera's environment.
	Shows the current temperature of the camera's environment.
	Scheduled feeding alarm.
	Lullabies feeding reminder.
	Real-time connection: Green: Connected successfully.
	Displays the current music player status (left side).
	Shows the current image magnification.
	Indicates low power mode is enabled.
	Shows audio output status (mute/unmute).
	Displays the current date and time.
	Indicates battery level or charging status.
	Indicates motion detection is active.
	A flashing red dot signifies live video recording.

10. FCC Statement

Warning:
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures—reorient or relocate the receiving antenna.
—Increase the separation between the equipment and receiver.
—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
—Consult the dealer or an experienced radio/TV technician for help.

RF Exposure Statement
To maintain compliance with FCC's RF Exposure guidelines, this equipment should be installed and operated with minimum distance of 20cm from your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

名称： Baby Monitor说明书

尺寸： 100x150mm

颜色工艺： 四色印刷