

FCC Appendix RF Test Data for BT

FCC ID : **2BP98-C2**

Company : **Shenzhen Kuge Times Technology Co., Ltd.**

EUT : **4-in-1 Wireless CarPlay Adapter With Auto
Emergency Rescue Device**

Model Number : **C2**

Report No. : **CTA26022400401**

Reviewed By : **Eric Wang**

Appendix A: 20dB Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.939	2401.553	2402.492	---	---
		2441	0.954	2440.547	2441.501	---	---
		2480	0.957	2479.544	2480.501	---	---
2DH5	Ant1	2402	1.287	2401.376	2402.663	---	---
		2441	1.290	2440.376	2441.666	---	---
		2480	1.284	2479.379	2480.663	---	---
3DH5	Ant1	2402	1.302	2401.355	2402.657	---	---
		2441	1.287	2440.373	2441.660	---	---
		2480	1.293	2479.364	2480.657	---	---

Test Graphs

DH5_Ant1_2402



DH5_Ant1_2441



DH5_Ant1_2480



2DH5_Ant1_2402



2DH5_Ant1_2441



2DH5_Ant1_2480



3DH5_Ant1_2402



3DH5_Ant1_2441



3DH5_Ant1_2480




Appendix B: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.85846	2401.5806	2402.4391	---	---
		2441	0.87411	2440.5751	2441.4492	---	---
		2480	0.87094	2479.5730	2480.4440	---	---
2DH5	Ant1	2402	1.1926	2401.4134	2402.6060	---	---
		2441	1.1860	2440.4162	2441.6022	---	---
		2480	1.1871	2479.4155	2480.6026	---	---
3DH5	Ant1	2402	1.1895	2401.4134	2402.6029	---	---
		2441	1.1780	2440.4294	2441.6074	---	---
		2480	1.1799	2479.4195	2480.5994	---	---

Test Graphs

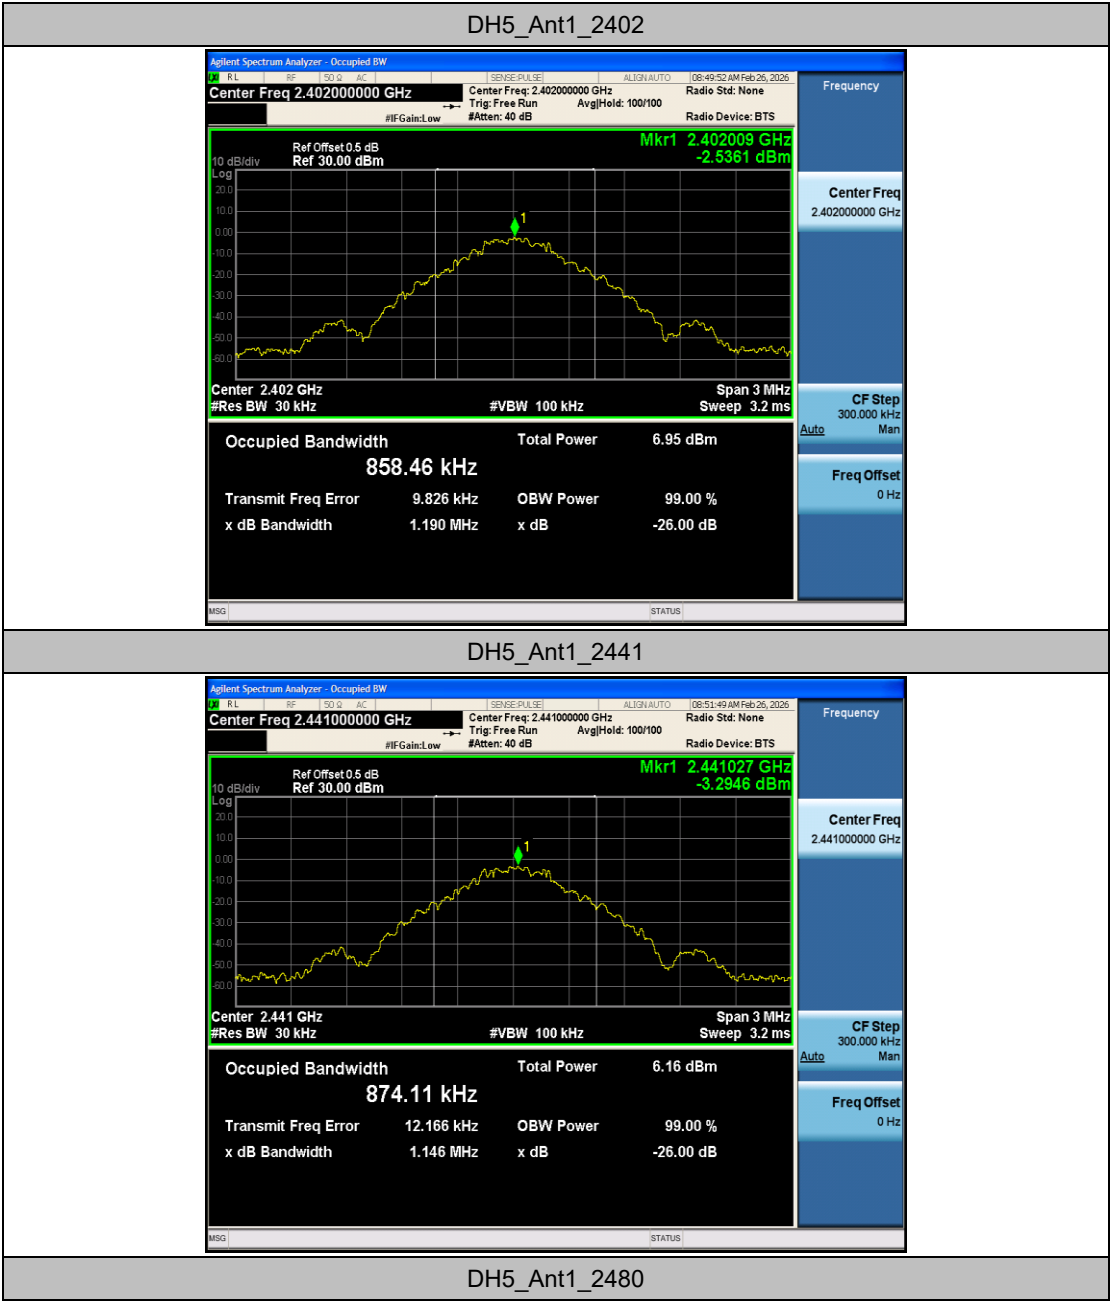




2DH5_Ant1_2402



2DH5_Ant1_2441



2DH5_Ant1_2480

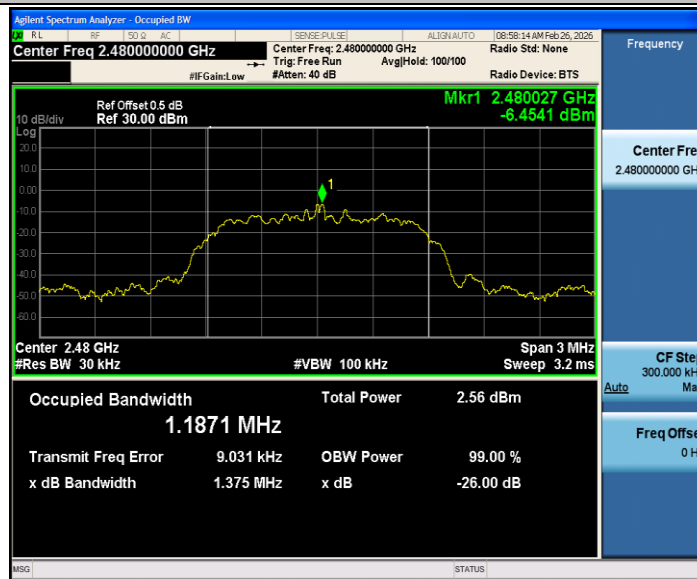

3DH5_Ant1_2402



3DH5_Ant1_2441



3DH5_Ant1_2480



Appendix C: Maximum conducted output power

Test Result Peak


Test Mode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	0.29	≤20.97	PASS
		2441	-0.35	≤20.97	PASS
		2480	-0.61	≤20.97	PASS
2DH5	Ant1	2402	-0.58	≤20.97	PASS
		2441	-1.19	≤20.97	PASS
		2480	-1.52	≤20.97	PASS
3DH5	Ant1	2402	-0.15	≤20.97	PASS
		2441	-0.76	≤20.97	PASS
		2480	-1.06	≤20.97	PASS

Appendix D: Carrier frequency separation

Test Result

TestMode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.012	≥ 0.957	PASS
2DH5	Ant1	Hop	0.976	≥ 0.860	PASS
3DH5	Ant1	Hop	0.992	≥ 0.868	PASS

Test Graphs

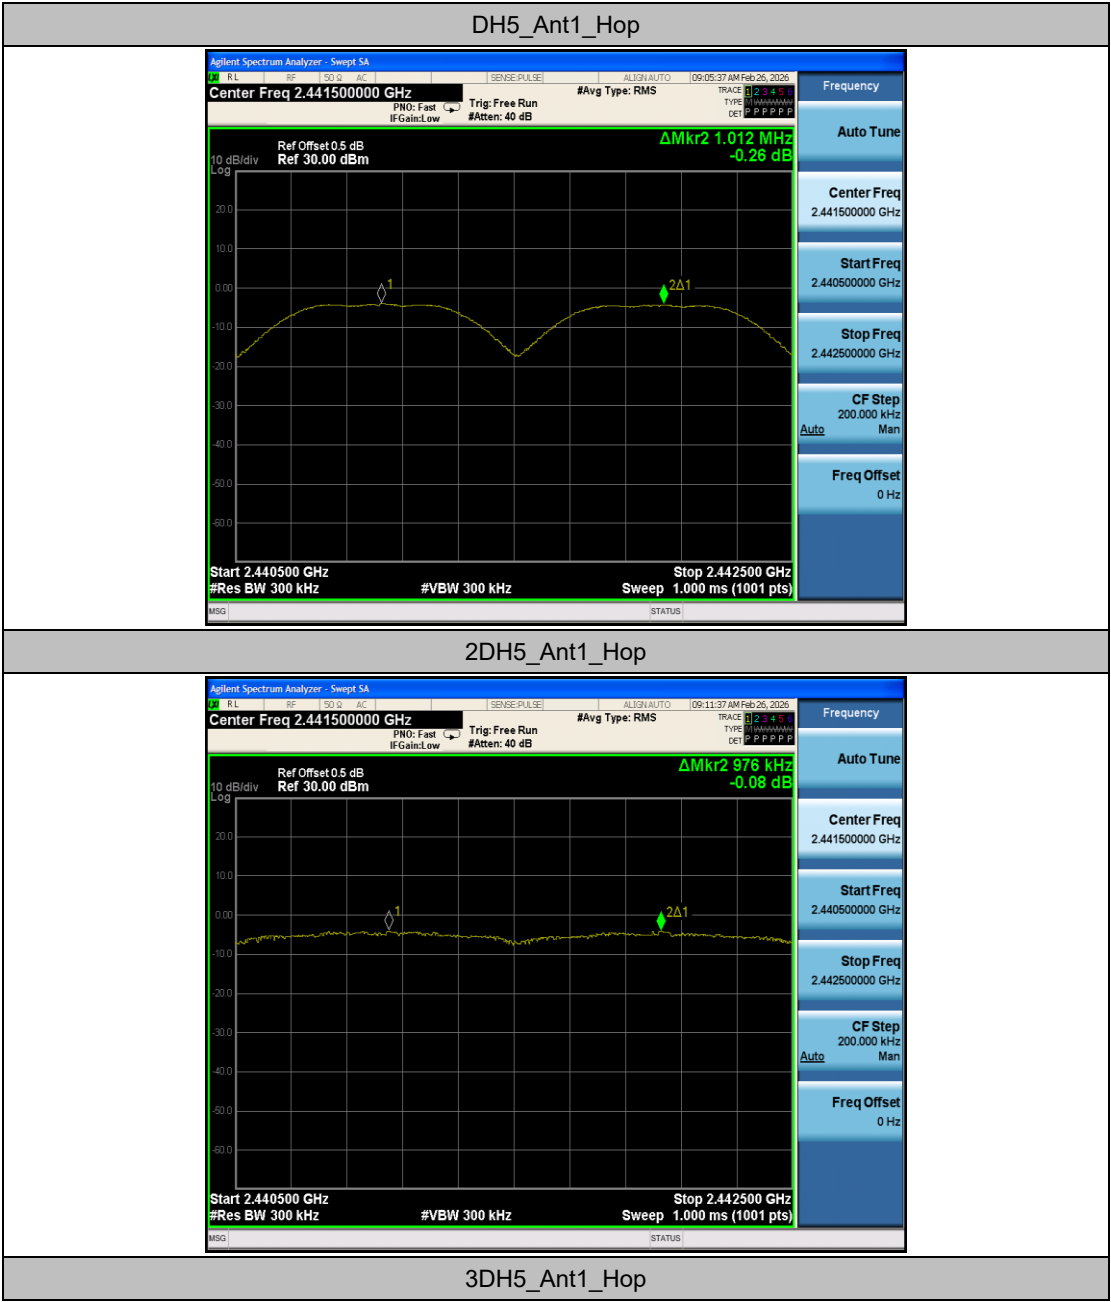




Appendix E: Time of occupancy



Test Result

TestMode	Antenna	Freq(MHz)	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.407	319	0.13	≤0.4	PASS
DH3	Ant1	Hop	1.662	158	0.263	≤0.4	PASS
DH5	Ant1	Hop	2.910	103	0.3	≤0.4	PASS
2DH1	Ant1	Hop	0.415	319	0.132	≤0.4	PASS
2DH3	Ant1	Hop	1.667	162	0.27	≤0.4	PASS
2DH5	Ant1	Hop	2.916	109	0.318	≤0.4	PASS
3DH1	Ant1	Hop	0.415	318	0.132	≤0.4	PASS
3DH3	Ant1	Hop	1.666	153	0.255	≤0.4	PASS
3DH5	Ant1	Hop	2.917	101	0.295	≤0.4	PASS


Test Graphs

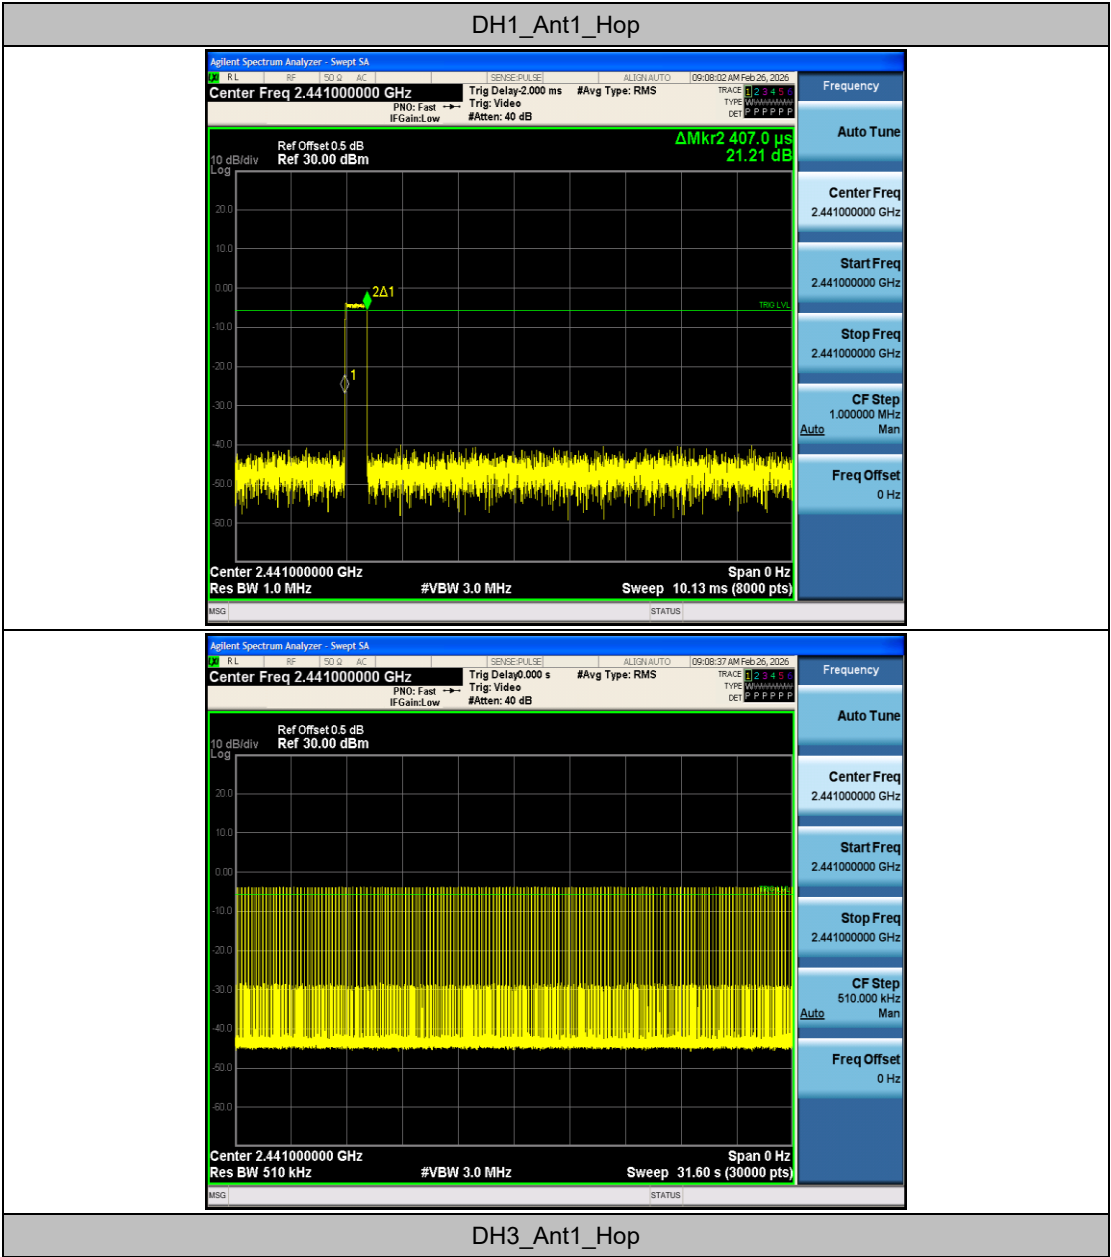


DH3_Ant1_Hop

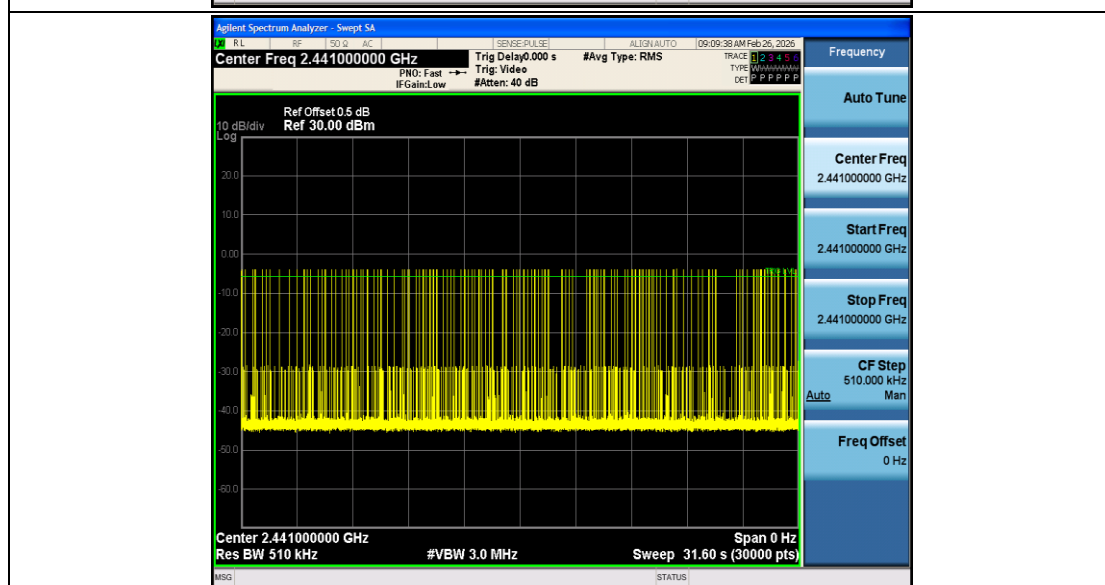
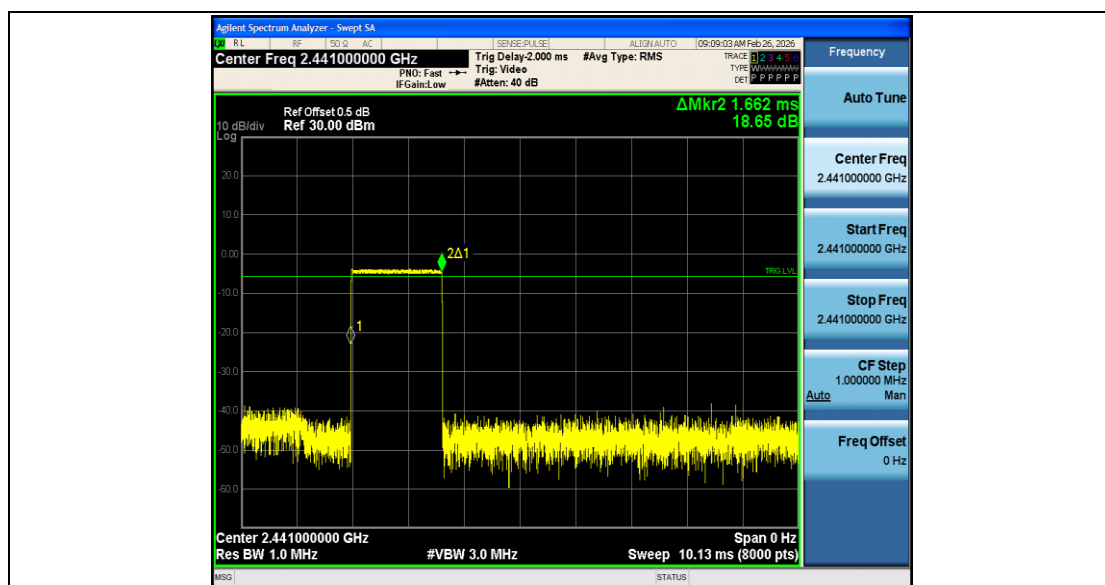


DH5_Ant1_Hop


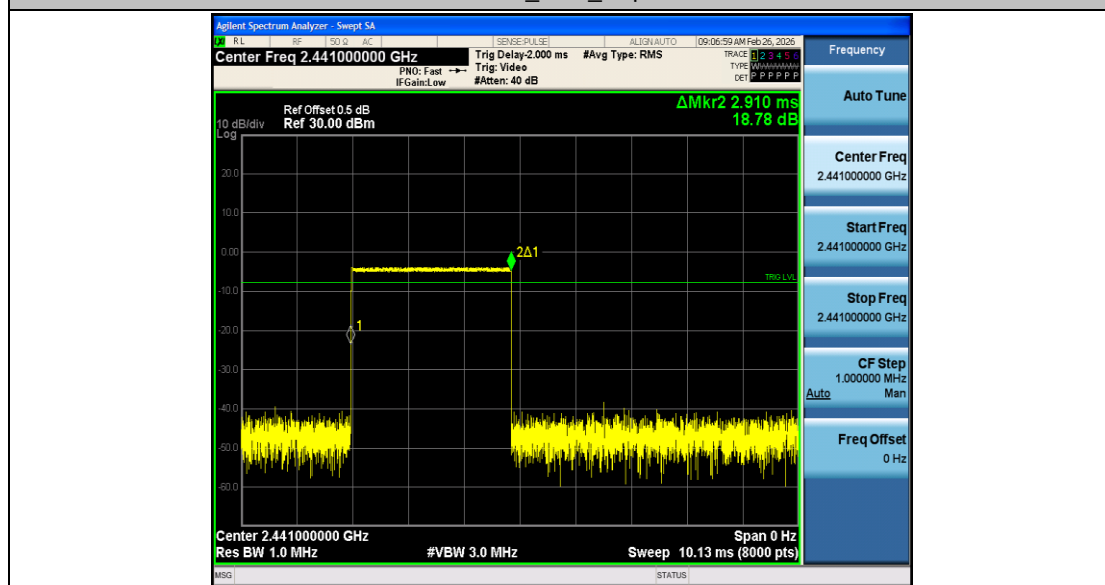


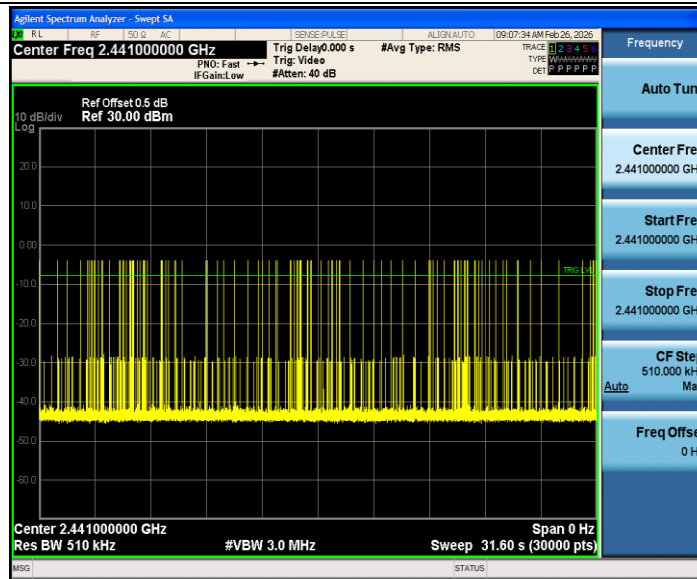


2DH1_Ant1_Hop

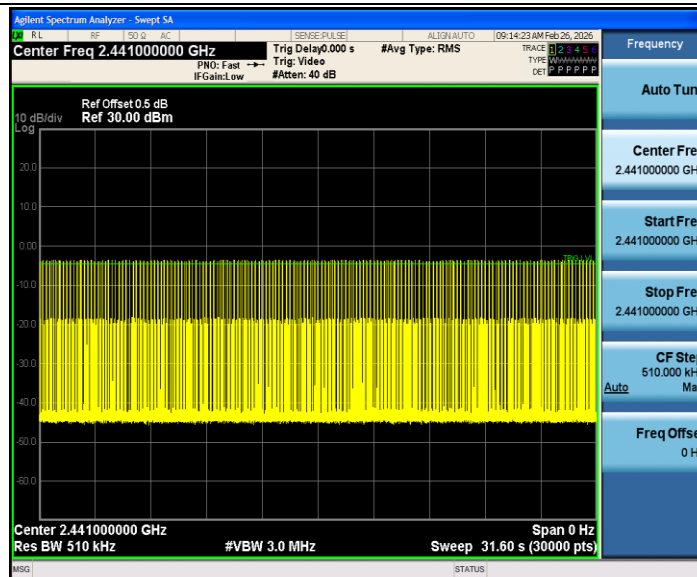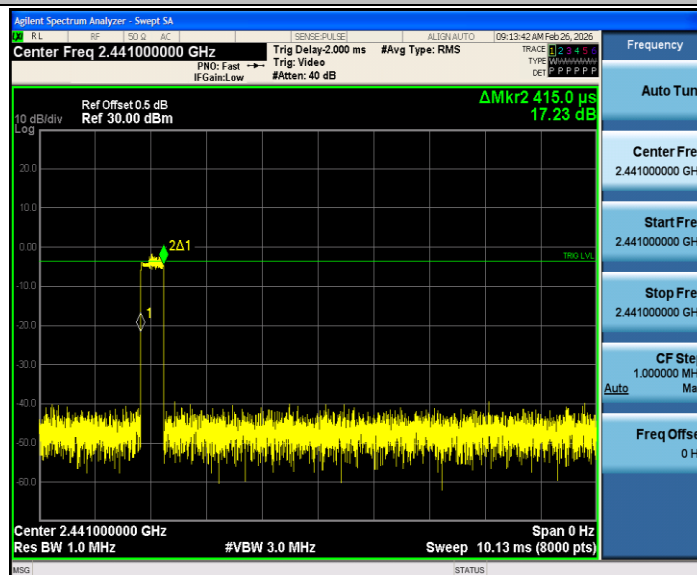

2DH3_Ant1_Hop

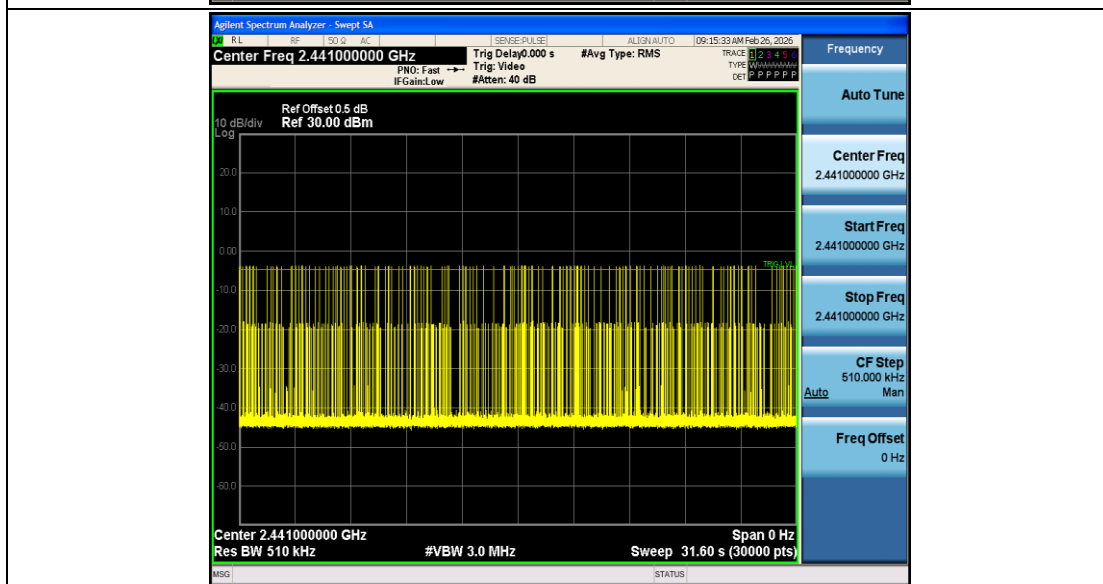
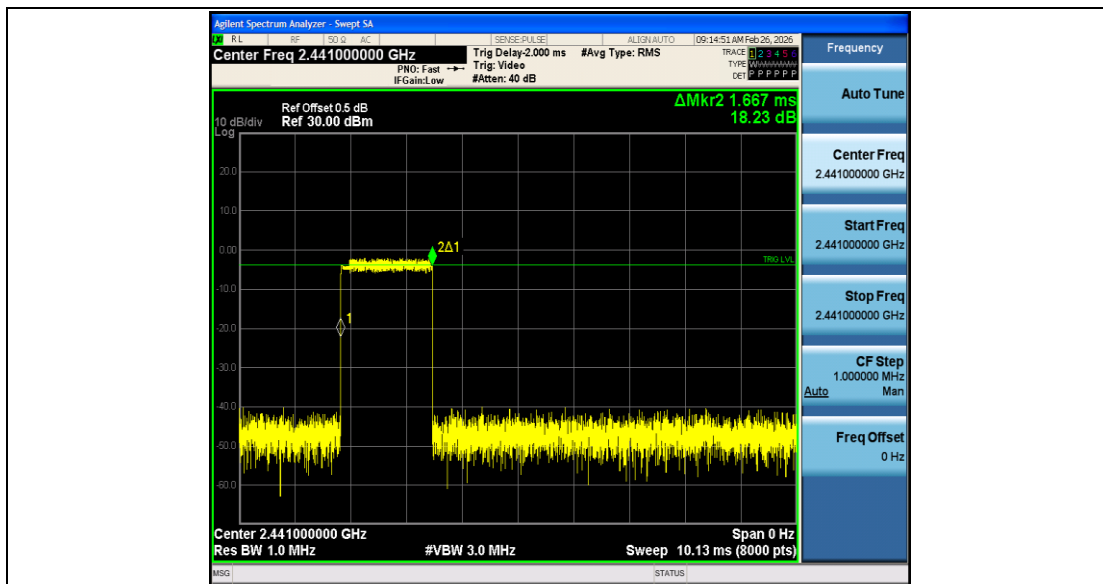


2DH5_Ant1_Hop


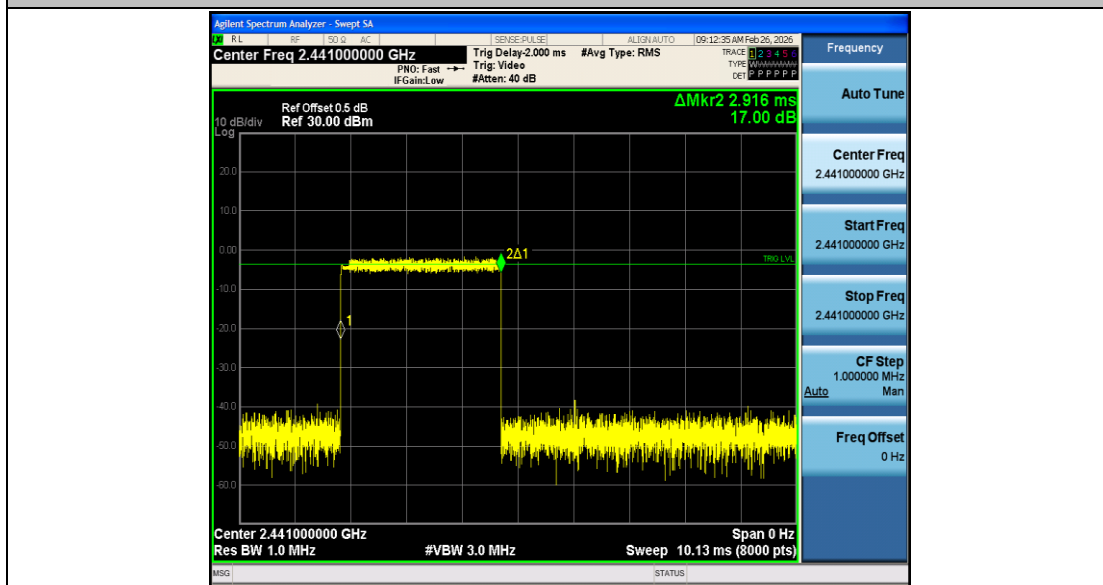





3DH1_Ant1_Hop

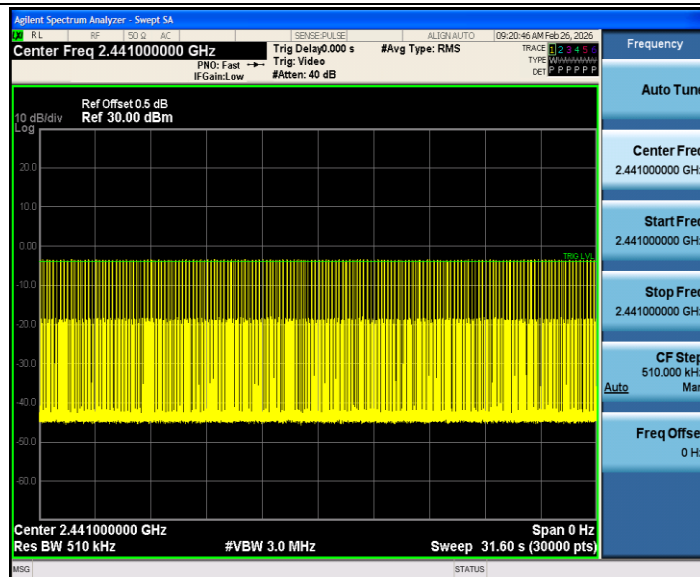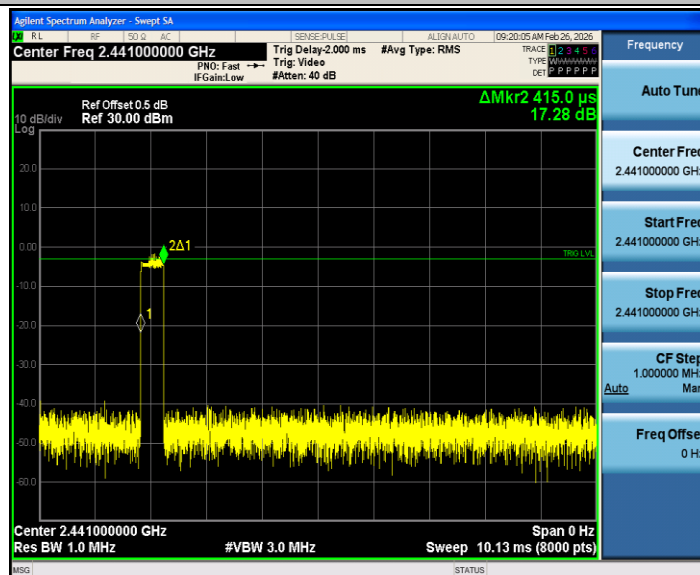


3DH3_Ant1_Hop

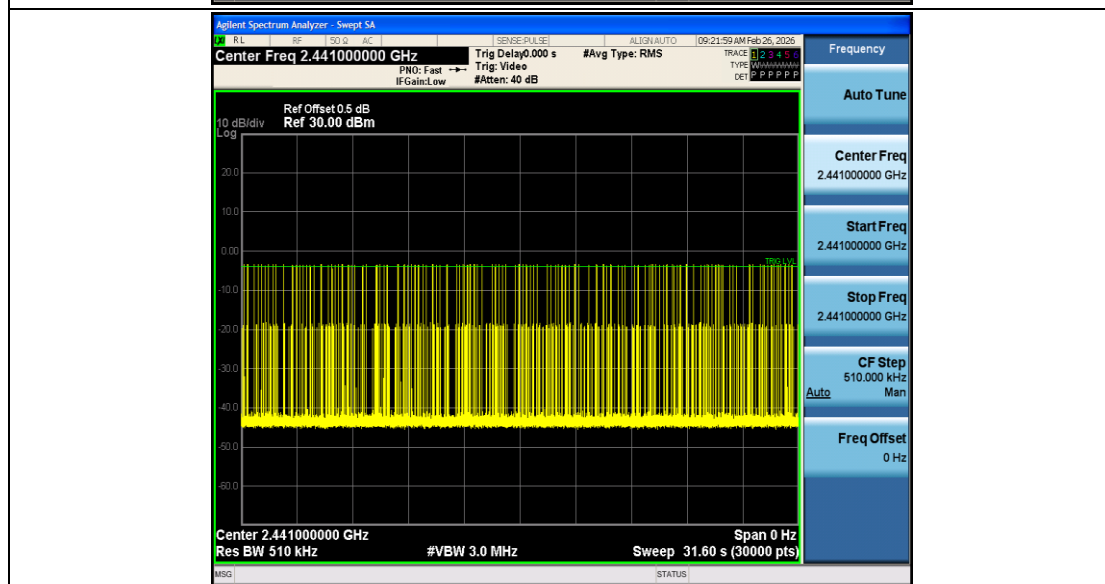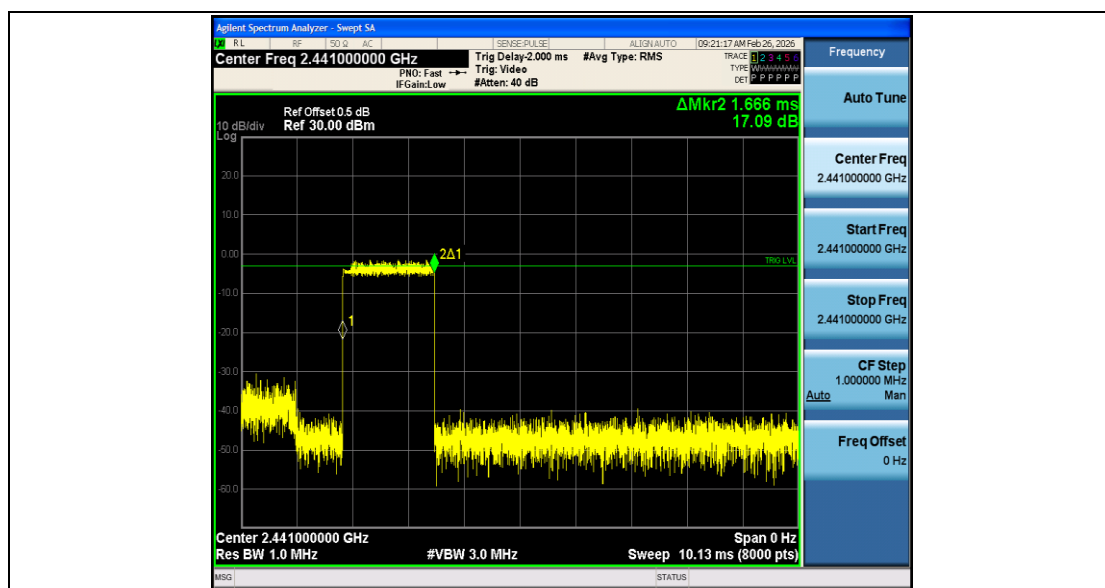

3DH5_Ant1_Hop

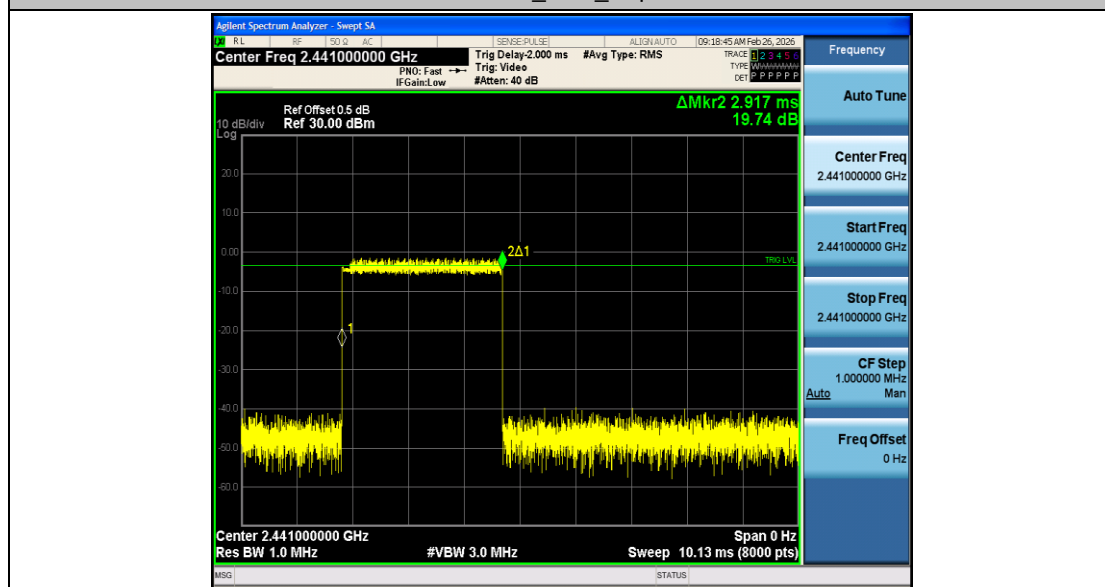

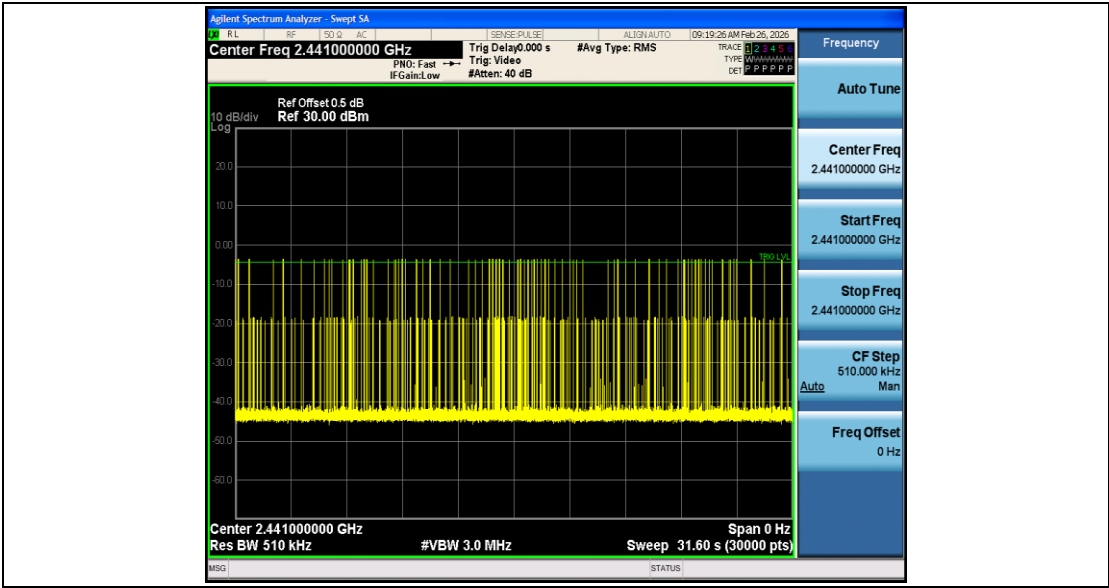



Appendix F: Number of hopping channels

Test Result

TestMode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

Test Graphs

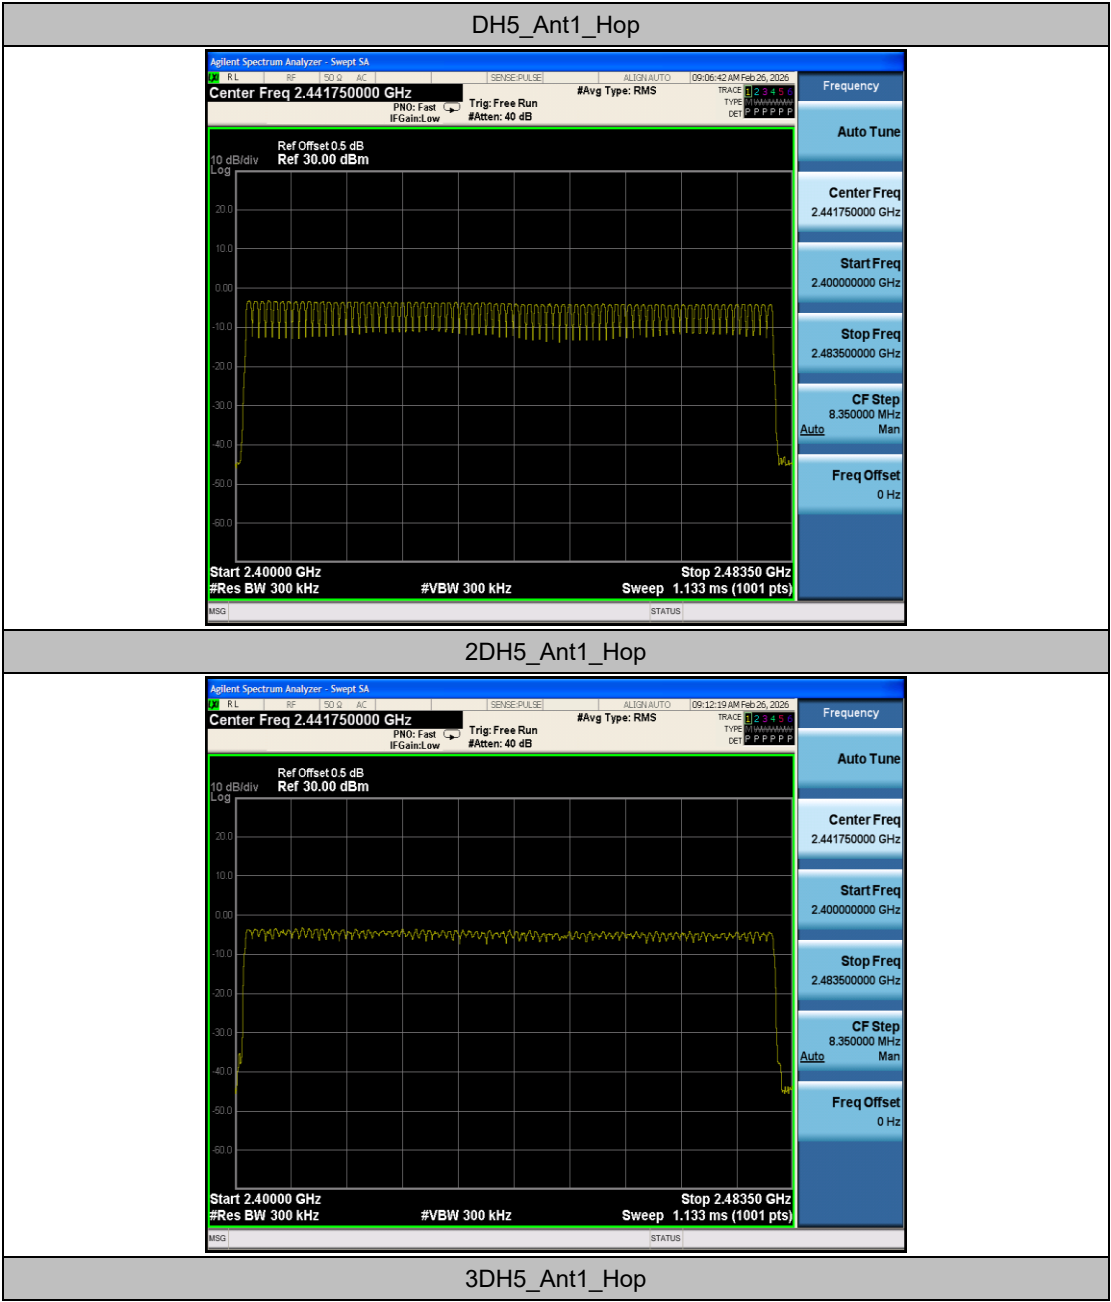

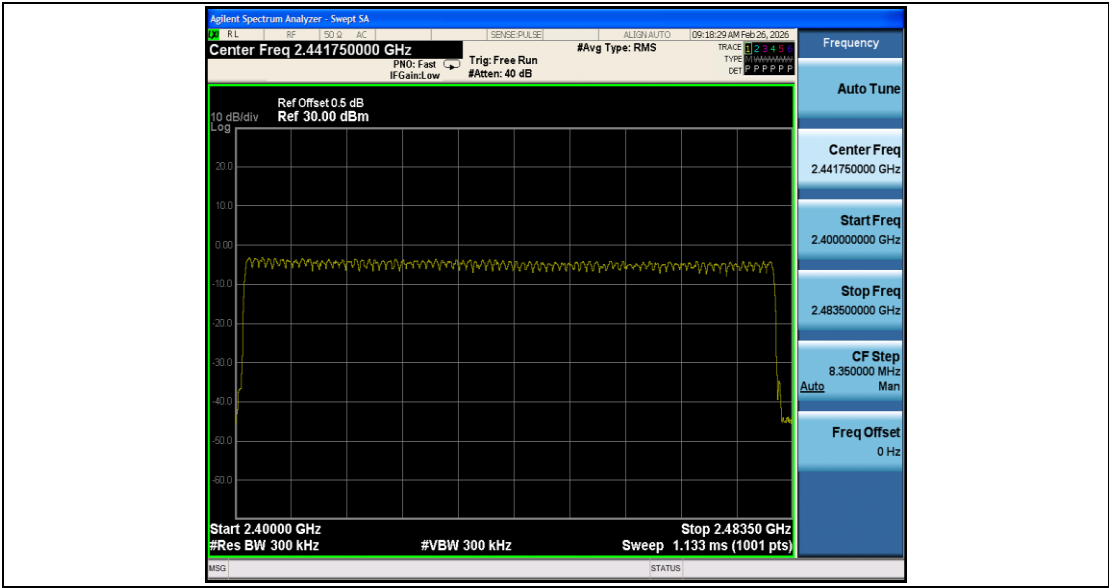



Appendix G: Band edge measurements

Test Result


TestMode	Antenna	ChName	Freq(MHz)	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-0.21	-56.33	≤-20.21	PASS
		High	2480	-1.23	-58.03	≤-21.23	PASS
		Low	Hop_2402	-3.85	-56.78	≤-23.85	PASS
		High	Hop_2480	-4.68	-57.47	≤-24.68	PASS
2DH5	Ant1	Low	2402	-5.29	-56.55	≤-25.29	PASS
		High	2480	-4.27	-56.88	≤-24.27	PASS
		Low	Hop_2402	-6.54	-57.46	≤-26.54	PASS
		High	Hop_2480	-4.37	-57.02	≤-24.37	PASS
3DH5	Ant1	Low	2402	-5.64	-55.19	≤-25.64	PASS
		High	2480	-4.70	-57.79	≤-24.7	PASS
		Low	Hop_2402	-3.38	-57.49	≤-23.38	PASS
		High	Hop_2480	-4.22	-56.51	≤-24.22	PASS

Test Graphs

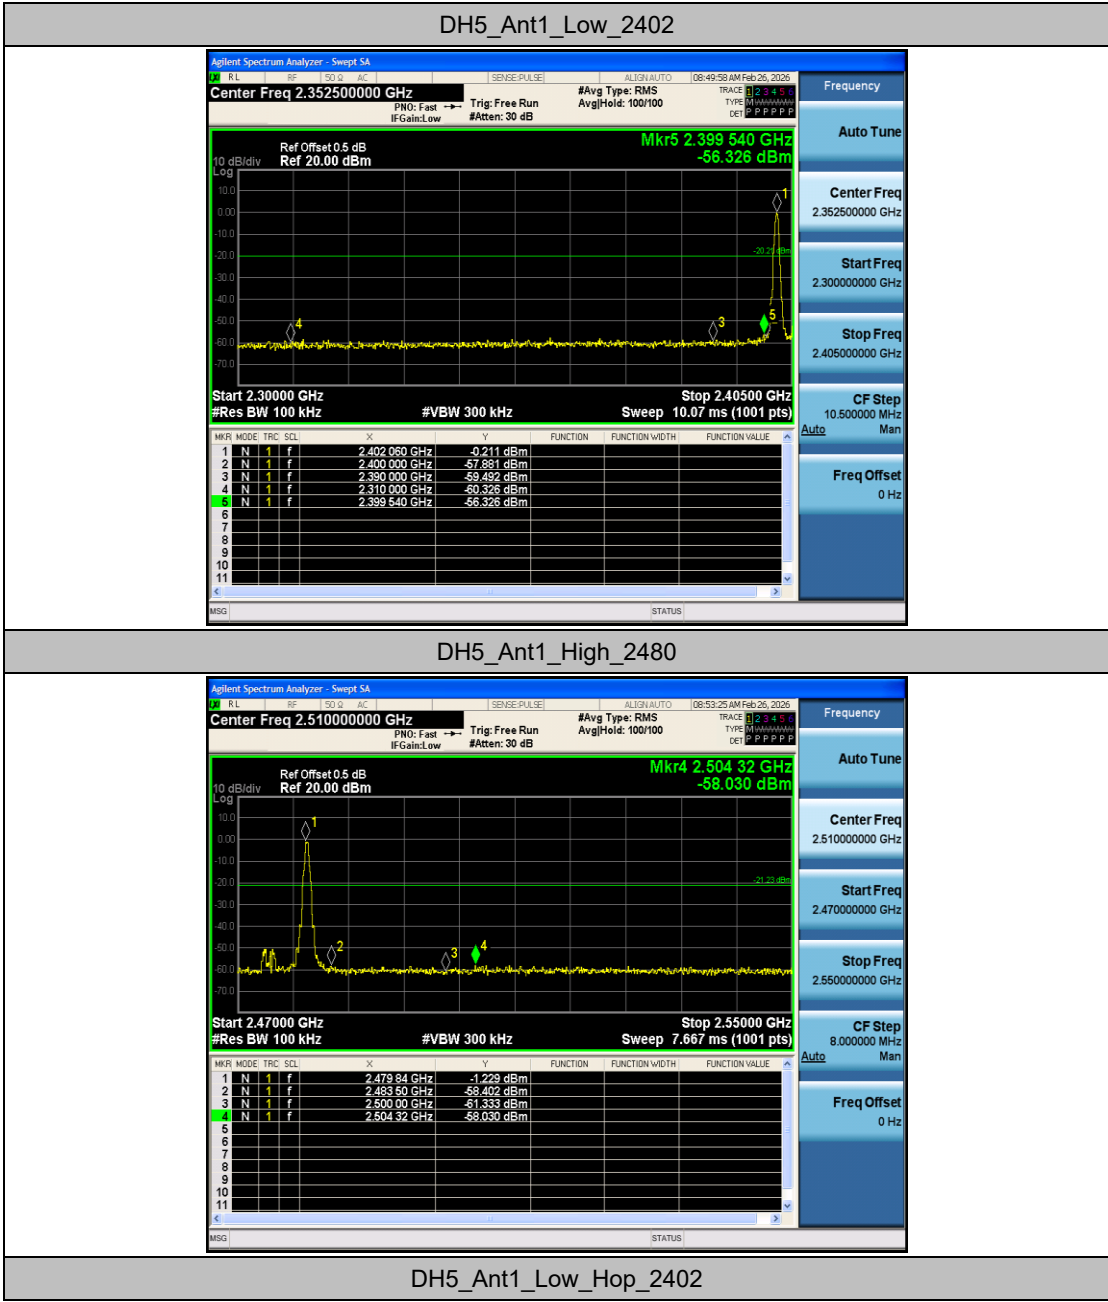


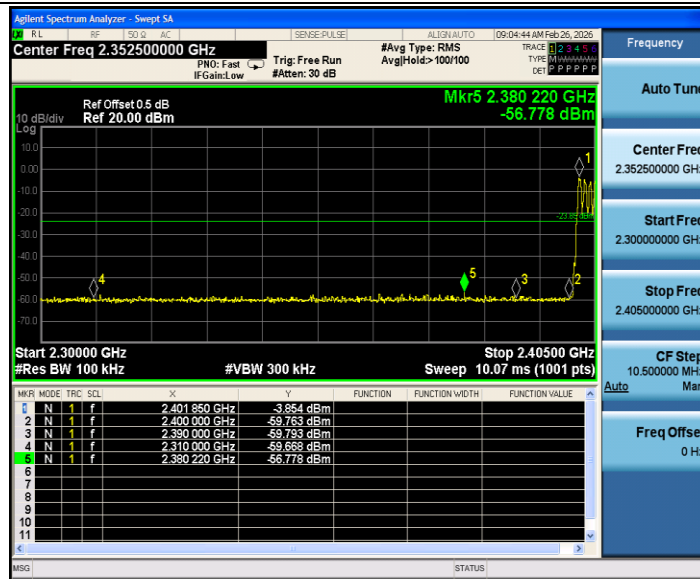


DH5_Ant1_High_Hop_2480

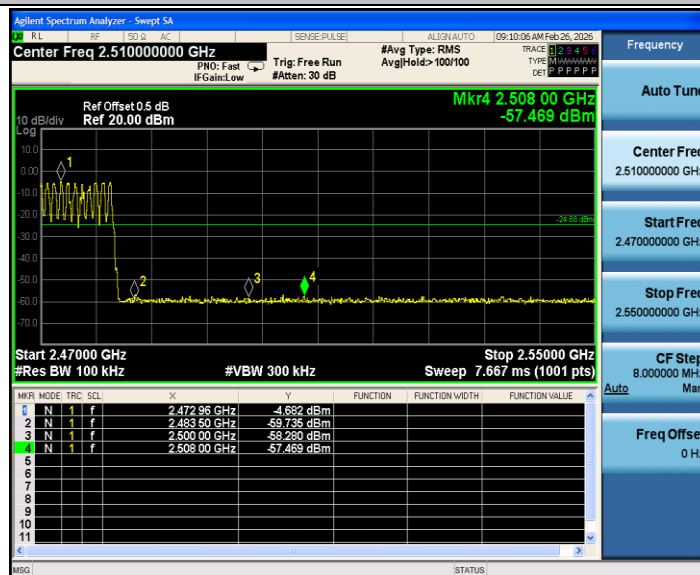


2DH5_Ant1_Low_2402

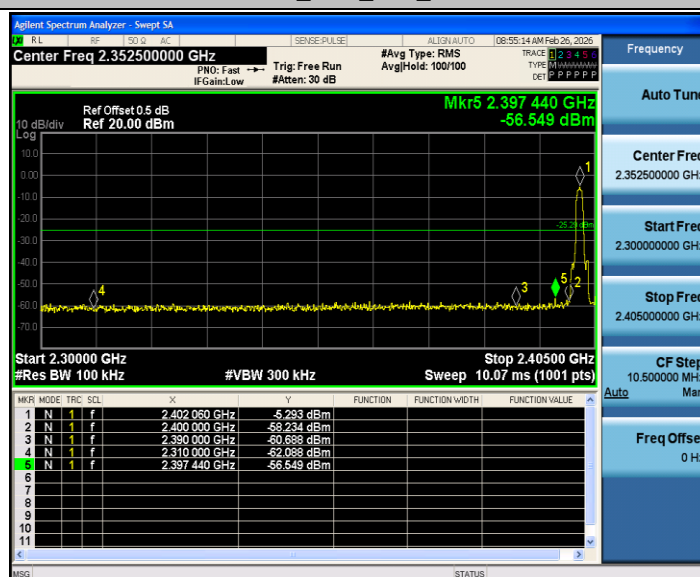


2DH5_Ant1_High_2480

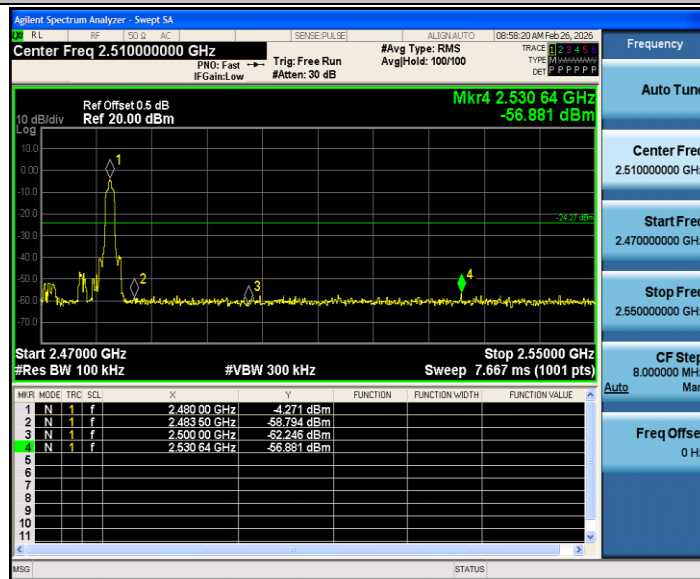


2DH5_Ant1_Low_Hop_2402

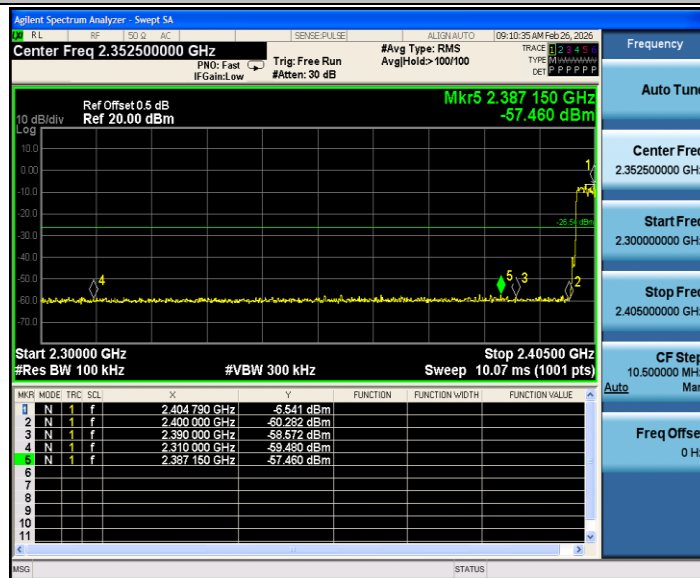


2DH5_Ant1_High_Hop_2480

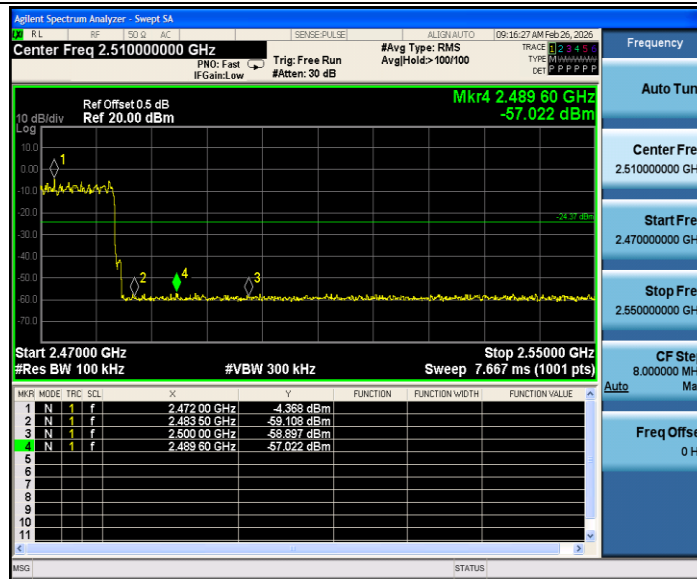


3DH5_Ant1_Low_2402

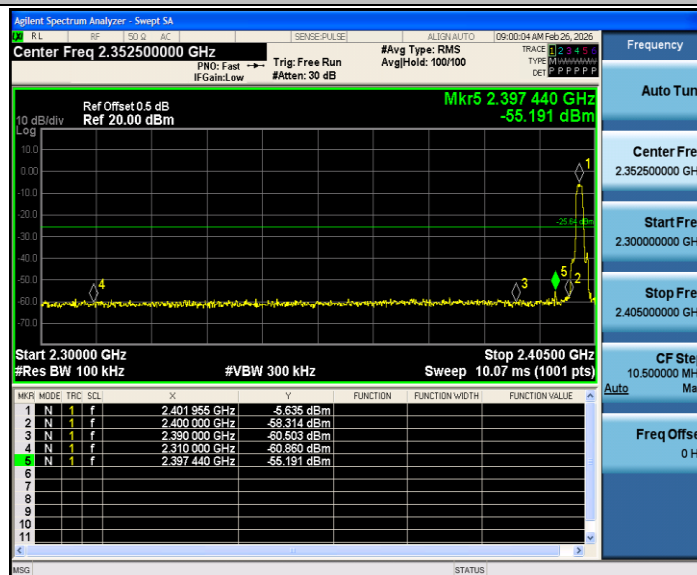


3DH5_Ant1_High_2480

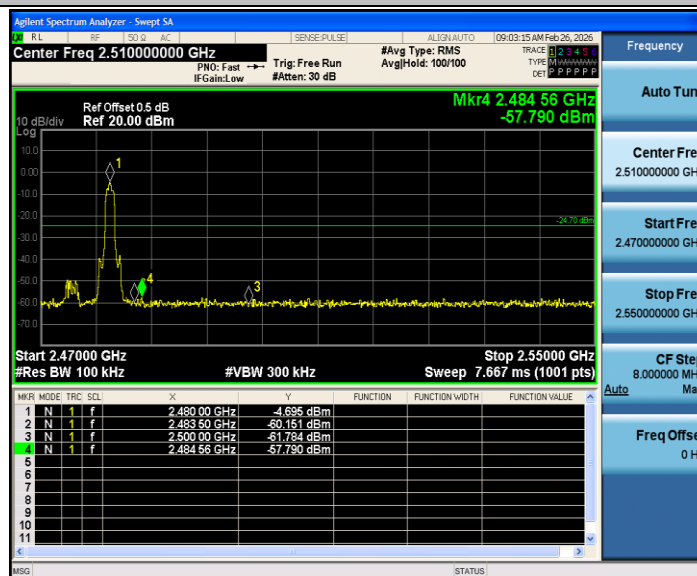

3DH5_Ant1_Low_Hop_2402

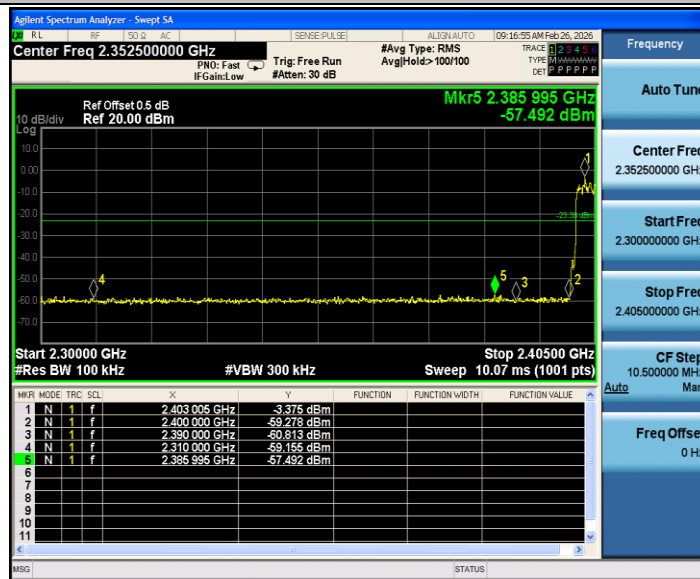

3DH5_Ant1_High_Hop_2480

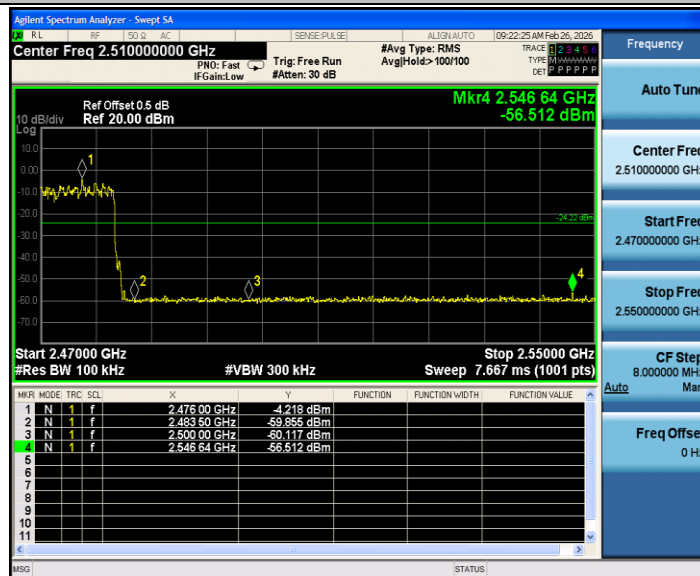



Appendix H: Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	-0.75	-0.75	---	PASS
			30~1000	-0.75	-67.91	≤-20.75	PASS
			1000~26500	-0.75	-44.14	≤-20.75	PASS
		2441	Reference	-1.11	-1.11	---	PASS
			30~1000	-1.11	-67.99	≤-21.11	PASS
			1000~26500	-1.11	-43.88	≤-21.11	PASS
		2480	Reference	-0.73	-0.73	---	PASS
			30~1000	-0.73	-67.49	≤-20.73	PASS
			1000~26500	-0.73	-44.46	≤-20.73	PASS
2DH5	Ant1	2402	Reference	-6.84	-6.84	---	PASS
			30~1000	-6.84	-68.2	≤-26.84	PASS
			1000~26500	-6.84	-49.89	≤-26.84	PASS
		2441	Reference	-4.86	-4.86	---	PASS
			30~1000	-4.86	-68.01	≤-24.86	PASS
			1000~26500	-4.86	-49.5	≤-24.86	PASS
		2480	Reference	-7.36	-7.36	---	PASS
			30~1000	-7.36	-67.52	≤-27.36	PASS
			1000~26500	-7.36	-49.39	≤-27.36	PASS
3DH5	Ant1	2402	Reference	-5.56	-5.56	---	PASS
			30~1000	-5.56	-67.79	≤-25.56	PASS
			1000~26500	-5.56	-47.37	≤-25.56	PASS
		2441	Reference	-6.06	-6.06	---	PASS
			30~1000	-6.06	-68.05	≤-26.06	PASS
			1000~26500	-6.06	-45.97	≤-26.06	PASS
		2480	Reference	-6.84	-6.84	---	PASS
			30~1000	-6.84	-67.31	≤-26.84	PASS
			1000~26500	-6.84	-49.34	≤-26.84	PASS

Test Graphs

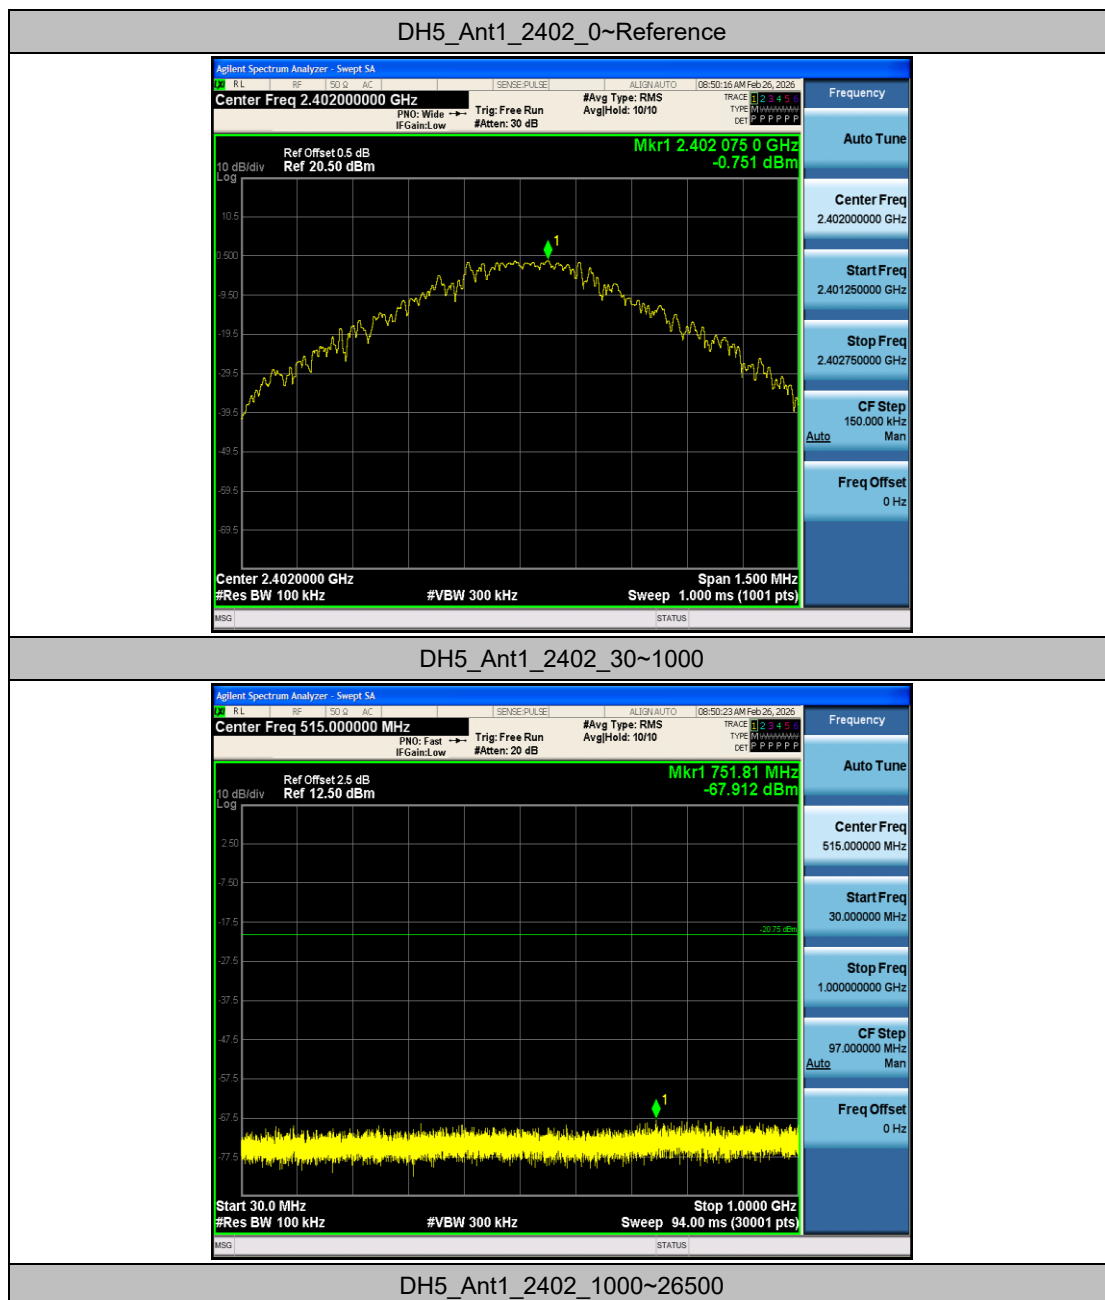


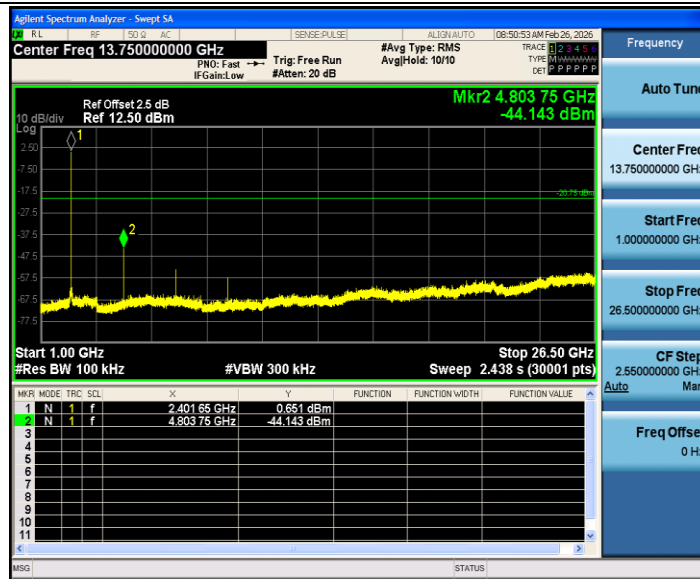


DH5_Ant1_2441_0~Reference



DH5_Ant1_2441_30~1000

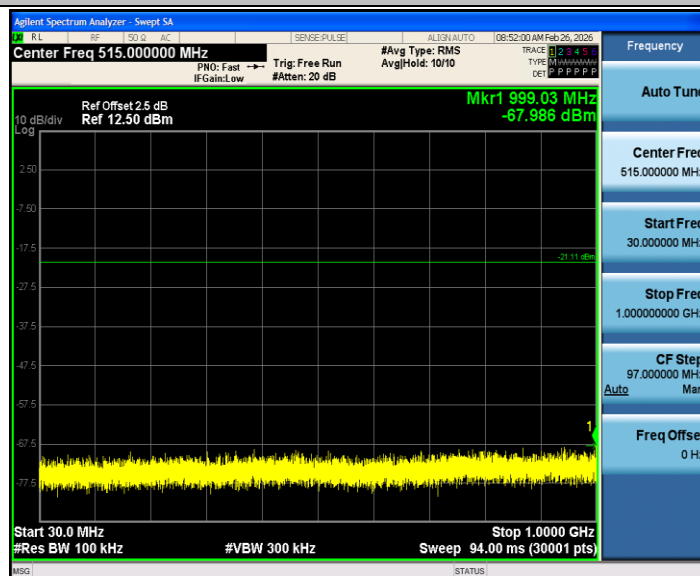


DH5_Ant1_2441_1000~26500

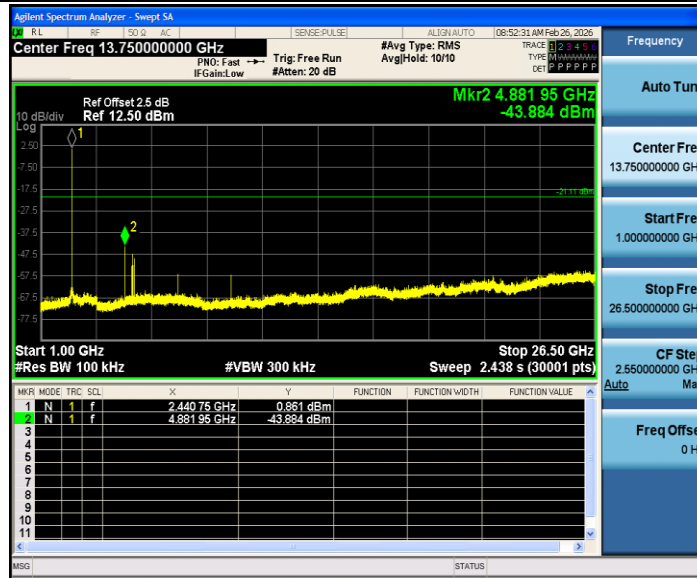


DH5_Ant1_2480_0~Reference




DH5_Ant1_2480_30~1000

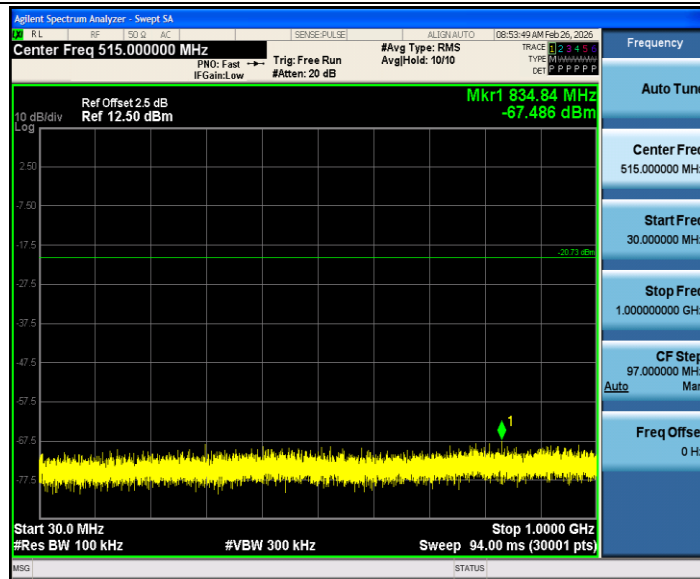


DH5_Ant1_2480_1000~26500

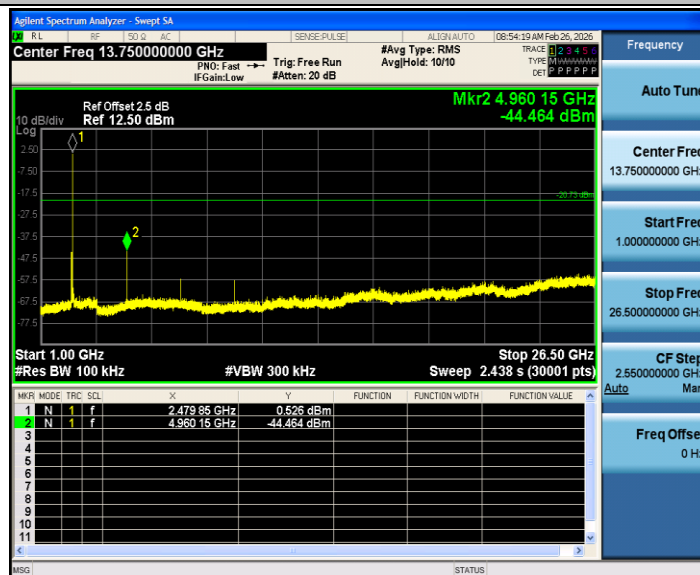


2DH5_Ant1_2402_0~Reference

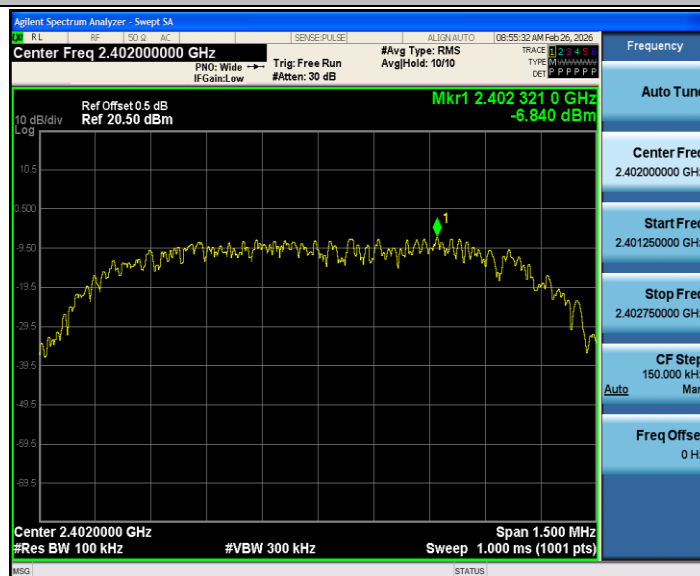

2DH5_Ant1_2402_30~1000

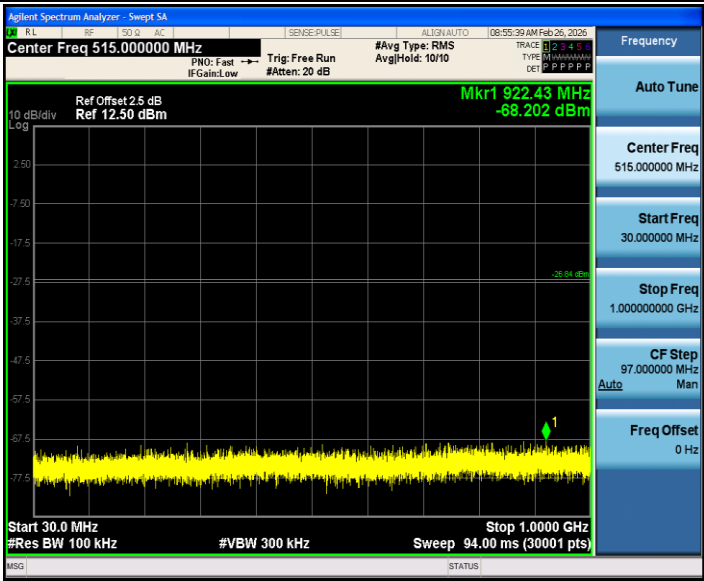

2DH5_Ant1_2402_1000~26500

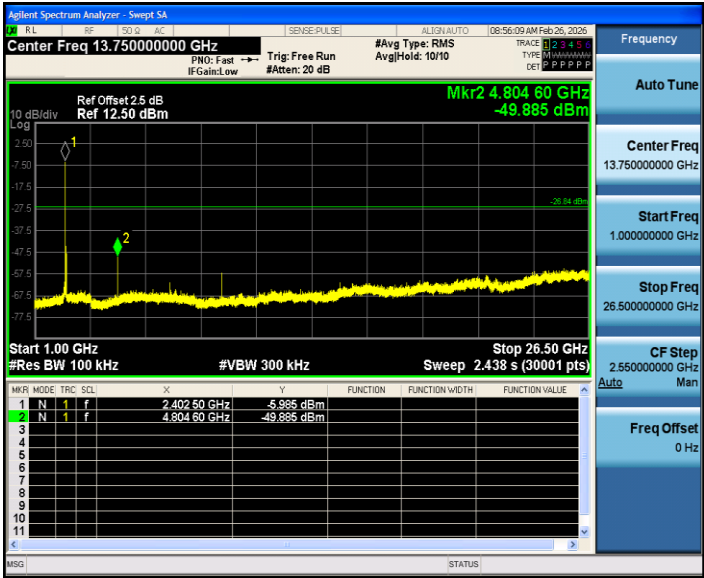

2DH5_Ant1_2441_0~Reference