

FCC Appendix RF Test Data for 2.4GWIFI

FCC ID : 2BPJF-VIPERGEN2650

Company : Nitehog Bulgaria JSC

EUT : Thermal Imaging Camera

Model Number : VIPER GEN2 650LRF

Report No. : CTA26081200703

Reviewed By : Eric Wang

Appendix A: DTS Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.240	2406.920	2417.160	0.5	PASS
		2437	10.240	2431.920	2442.160	0.5	PASS
		2462	10.160	2456.960	2467.120	0.5	PASS
11G	Ant1	2412	15.920	2404.040	2419.960	0.5	PASS
		2437	15.880	2429.080	2444.960	0.5	PASS
		2462	15.800	2454.200	2470.000	0.5	PASS
11N20SISO	Ant1	2412	16.960	2403.560	2420.520	0.5	PASS
		2437	17.040	2428.640	2445.680	0.5	PASS
		2462	16.600	2453.720	2470.320	0.5	PASS
11N40SISO	Ant1	2422	35.680	2404.400	2440.080	0.5	PASS
		2437	35.120	2419.960	2455.080	0.5	PASS
		2452	35.680	2434.480	2470.160	0.5	PASS

Test Graphs


11B_Ant1_2412



11B_Ant1_2437



11B_Ant1_2462

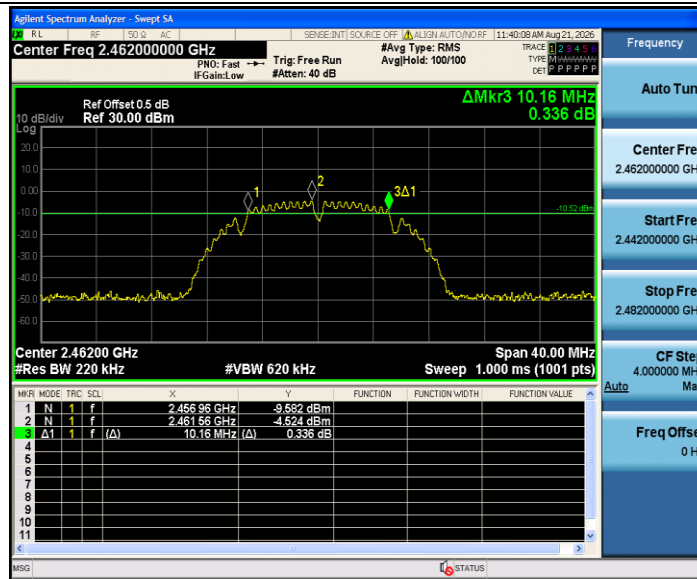

11G_Ant1_2412



11G_Ant1_2437



11G_Ant1_2462



11N20SISO_Ant1_2412




11N20SISO_Ant1_2437



11N20SISO_Ant1_2462



11N40SISO_Ant1_2422

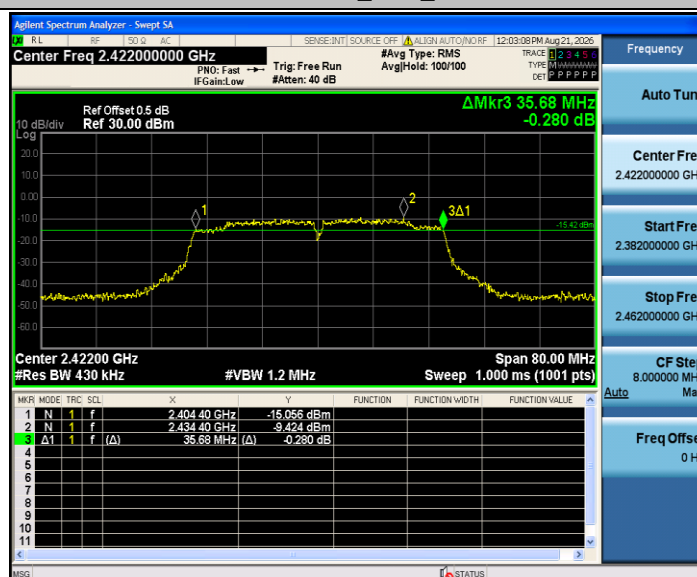

11N40SISO_Ant1_2437



11N40SISO_Ant1_2452




Appendix B: Occupied Channel Bandwidth

Test Result


TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.480	2405.2684	2418.7484	---	---
		2437	13.460	2430.2953	2443.7553	---	---
		2462	13.454	2455.3064	2468.7604	---	---
11G	Ant1	2412	16.867	2403.6005	2420.4675	---	---
		2437	16.798	2428.6427	2445.4407	---	---
		2462	16.844	2453.6441	2470.4881	---	---
11N20SISO	Ant1	2412	17.818	2403.1396	2420.9576	---	---
		2437	17.969	2428.0285	2445.9975	---	---
		2462	17.846	2453.1158	2470.9618	---	---
11N40SISO	Ant1	2422	36.115	2404.0864	2440.2014	---	---
		2437	36.057	2419.1440	2455.2010	---	---
		2452	36.135	2434.1047	2470.2397	---	---

Test Graphs


11B_Ant1_2412

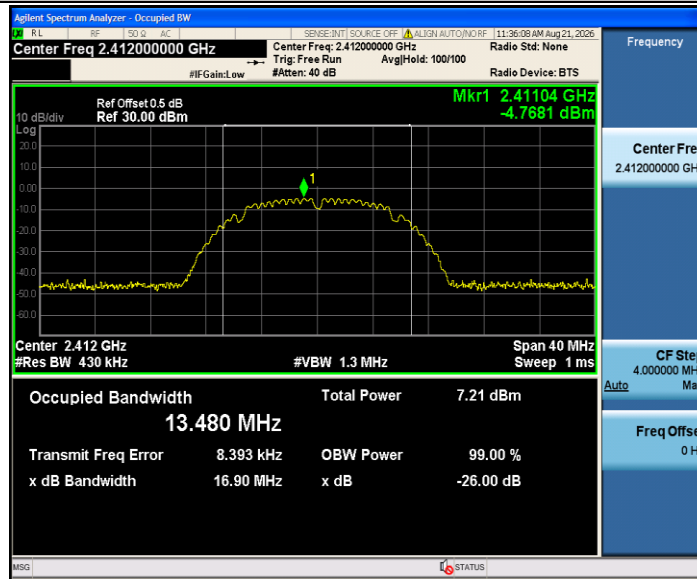


11B_Ant1_2437

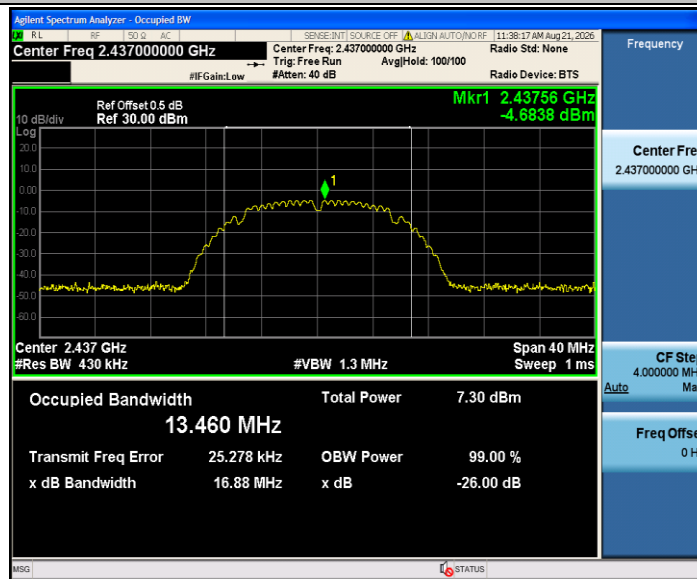


11B_Ant1_2462

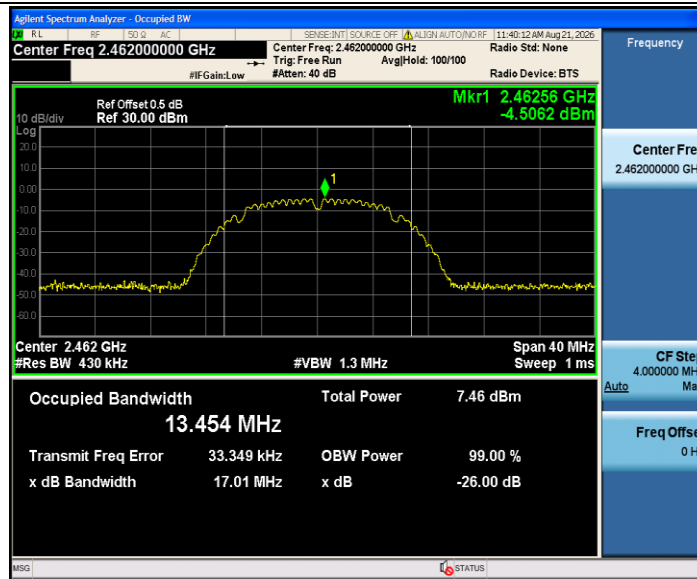

11G_Ant1_2412

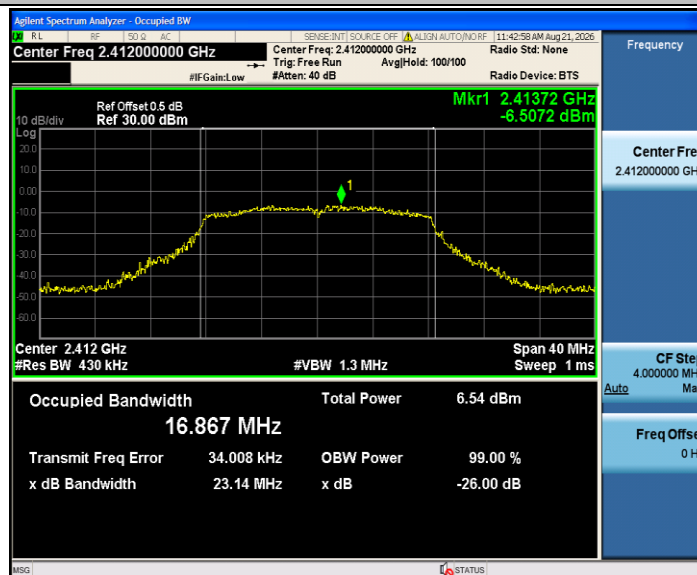

11G_Ant1_2437

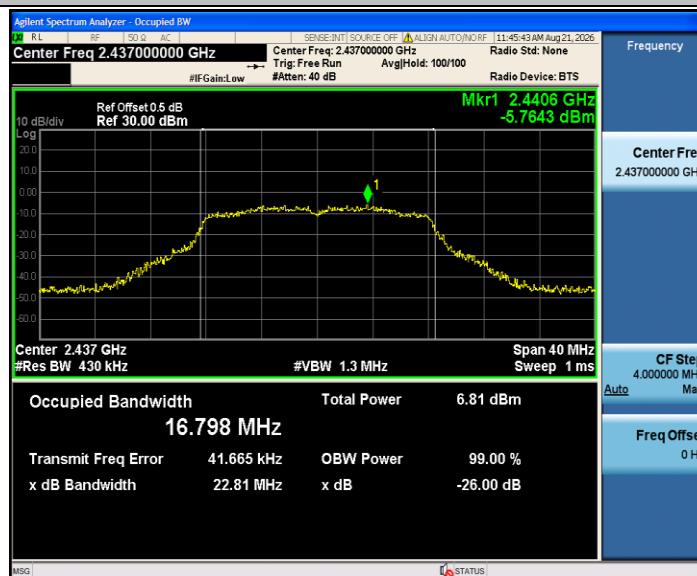

11G_Ant1_2462




11N20SISO_Ant1_2412




11N20SISO_Ant1_2437




11N20SISO_Ant1_2462

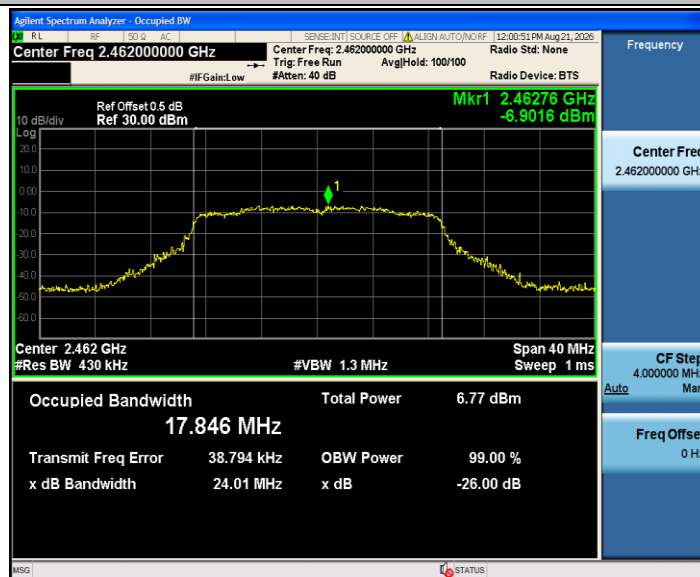


11N40SISO_Ant1_2422

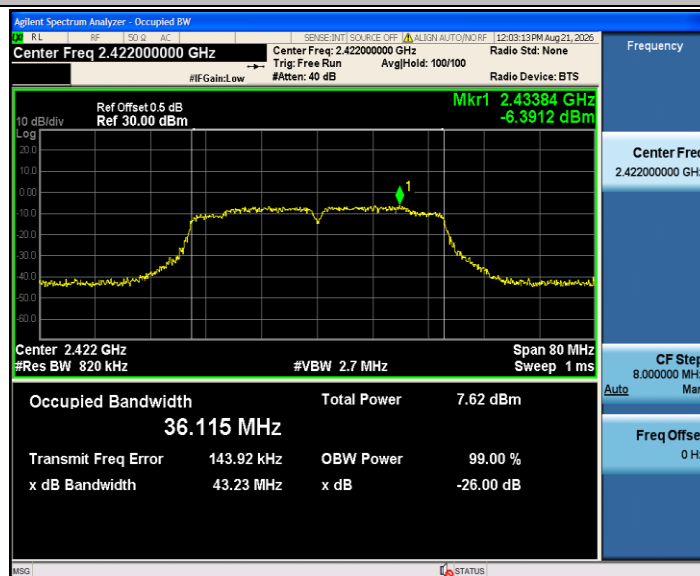

11N40SISO_Ant1_2437

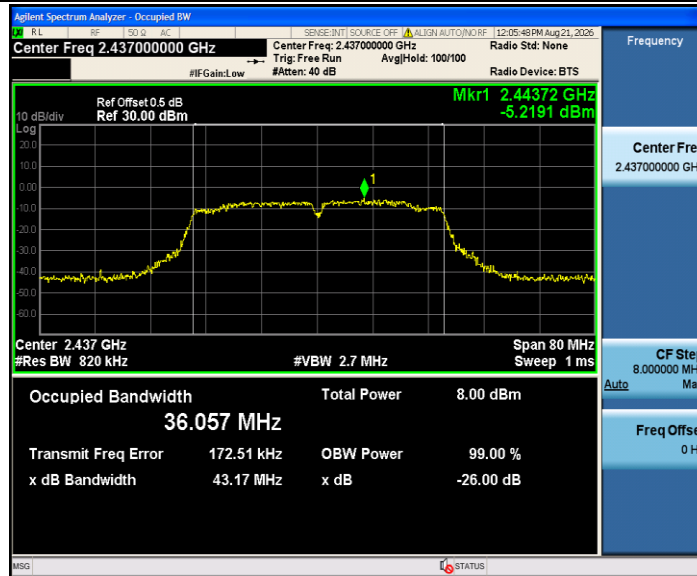

11N40SISO_Ant1_2452

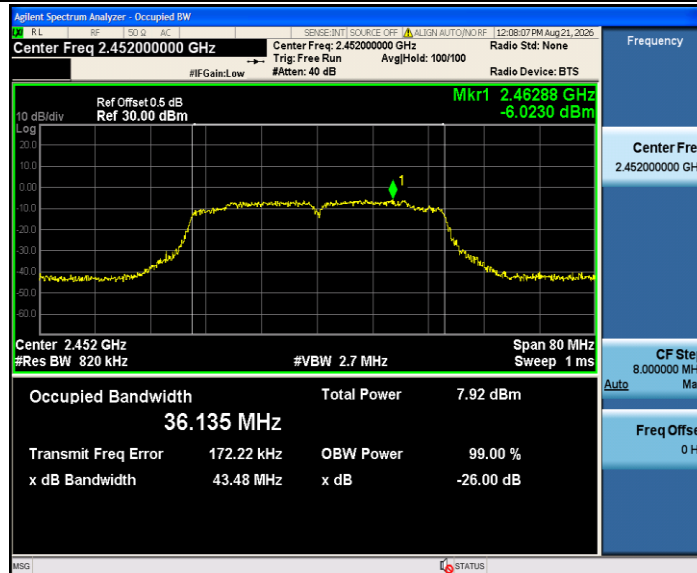

Appendix C: Maximum conducted output power

Test Result Peak

Test Mode	Antenna	Frequency [MHz]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	7.78	≤30.00	PASS
		2437	8.14	≤30.00	PASS
		2462	7.98	≤30.00	PASS
11G	Ant1	2412	7.49	≤30.00	PASS
		2437	7.82	≤30.00	PASS
		2462	7.97	≤30.00	PASS
11N20SISO	Ant1	2412	7.43	≤30.00	PASS
		2437	7.56	≤30.00	PASS
		2462	7.70	≤30.00	PASS
11N40SISO	Ant1	2422	6.83	≤30.00	PASS
		2437	6.98	≤30.00	PASS
		2452	7.12	≤30.00	PASS

Appendix D: Maximum power spectral density

Test Result

TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-19.27	≤8.00	PASS
		2437	-18.20	≤8.00	PASS
		2462	-18.96	≤8.00	PASS
11G	Ant1	2412	-24.16	≤8.00	PASS
		2437	-23.47	≤8.00	PASS
		2462	-24.21	≤8.00	PASS
11N20SISO	Ant1	2412	-23.43	≤8.00	PASS
		2437	-22.98	≤8.00	PASS
		2462	-23.32	≤8.00	PASS
11N40SISO	Ant1	2422	-26.49	≤8.00	PASS
		2437	-25.83	≤8.00	PASS
		2452	-26.32	≤8.00	PASS

Test Graphs

11B_Ant1_2412




11B_Ant1_2437




11B_Ant1_2462




11G_Ant1_2412

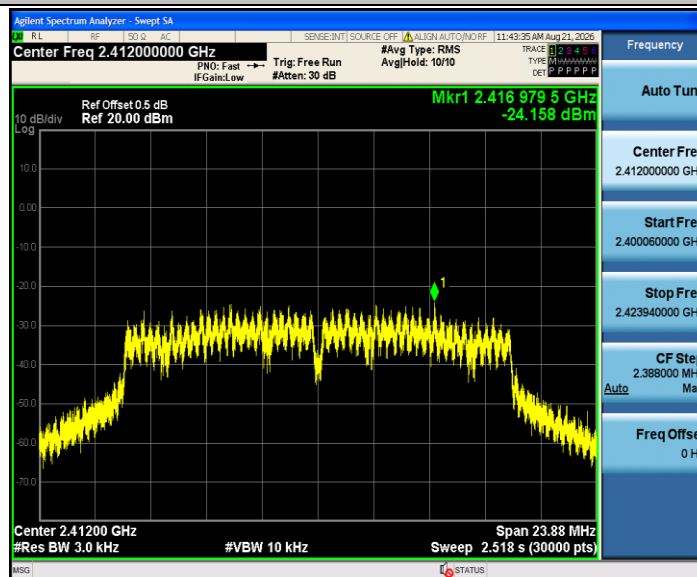


11G_Ant1_2437

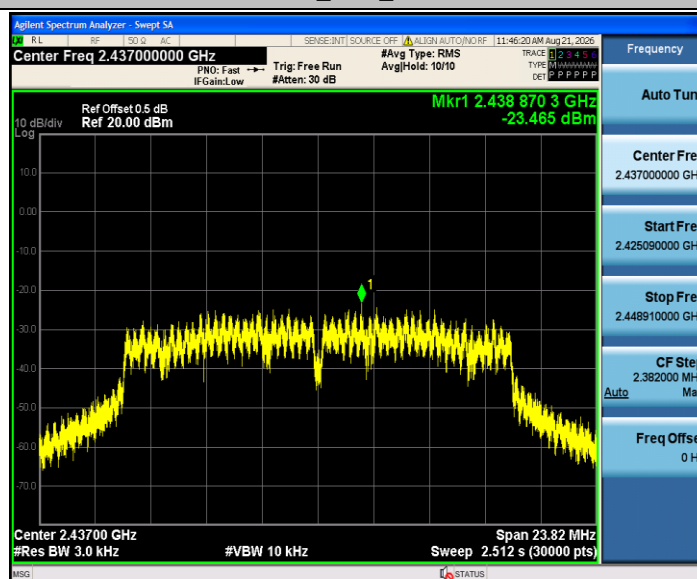


11G_Ant1_2462

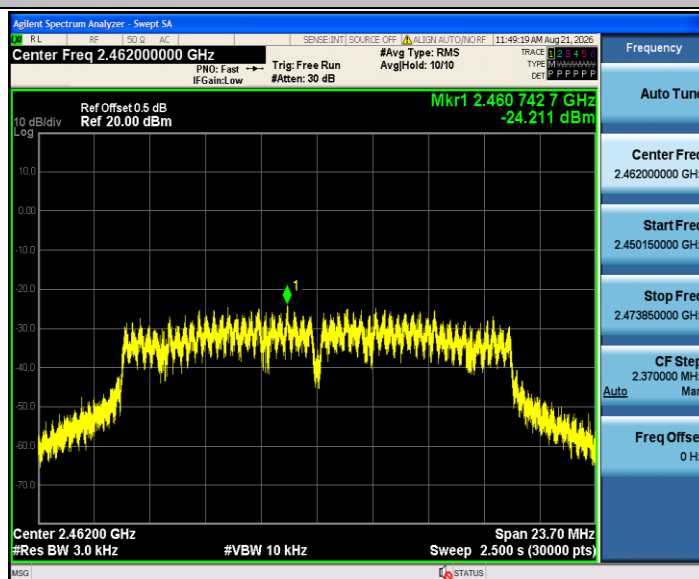


11N20SISO_Ant1_2412

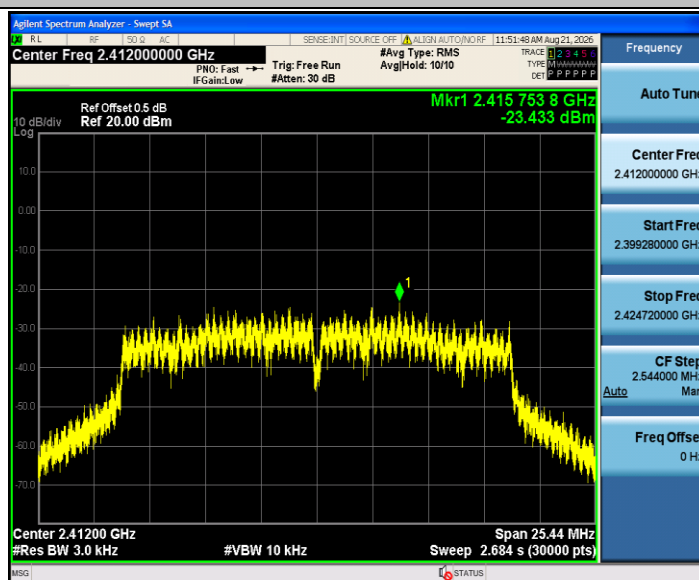


11N20SISO_Ant1_2437

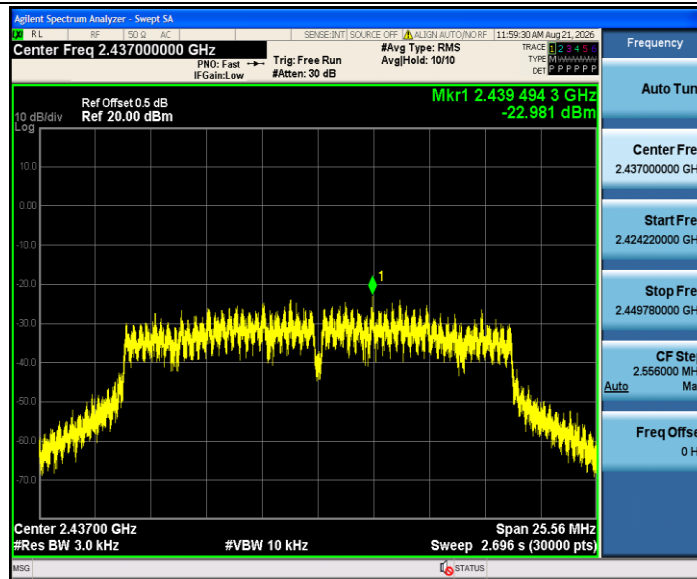


11N20SISO_Ant1_2462

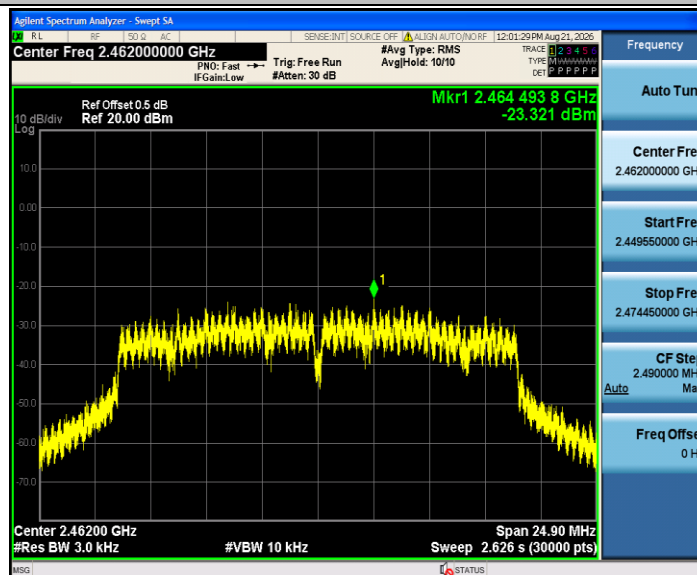


11N40SISO_Ant1_2422

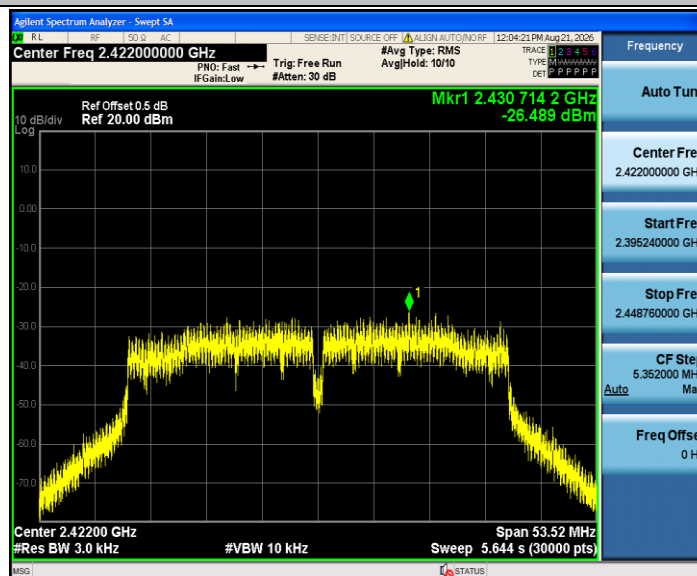

11N40SISO_Ant1_2437

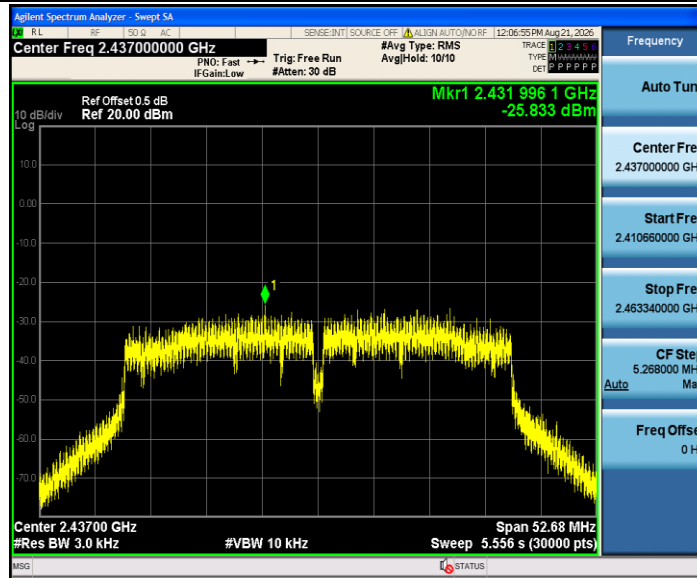

11N40SISO_Ant1_2452

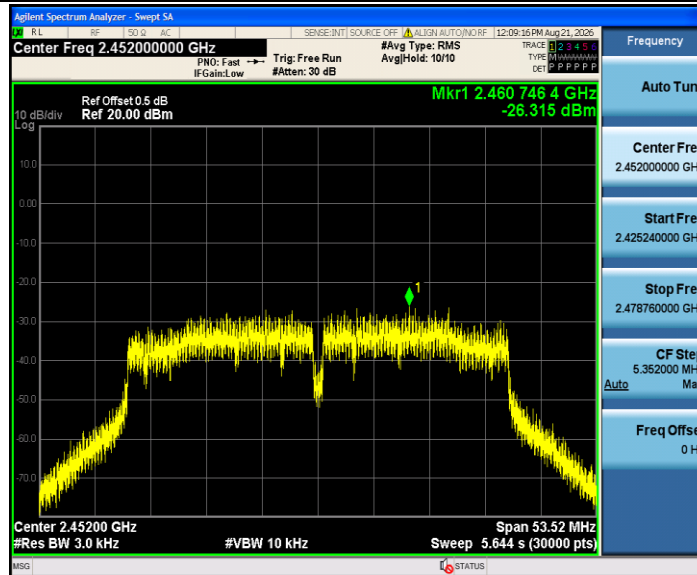


Appendix E: Band edge measurements

Test Result


TestMode	Antenna	Channel Name	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	-5.43	-57.06	≤-25.43	PASS
		High	2462	-4.87	-57.84	≤-24.87	PASS
11G	Ant1	Low	2412	-8.80	-39.62	≤-28.8	PASS
		High	2462	-8.41	-57.76	≤-28.41	PASS
11N20SISO	Ant1	Low	2412	-9.24	-39.51	≤-29.24	PASS
		High	2462	-8.30	-57.93	≤-28.3	PASS
11N40SISO	Ant1	Low	2422	-11.82	-39.74	≤-31.82	PASS
		High	2452	-11.74	-57.85	≤-31.74	PASS

Test Graphs


11B_Ant1_Low_2412

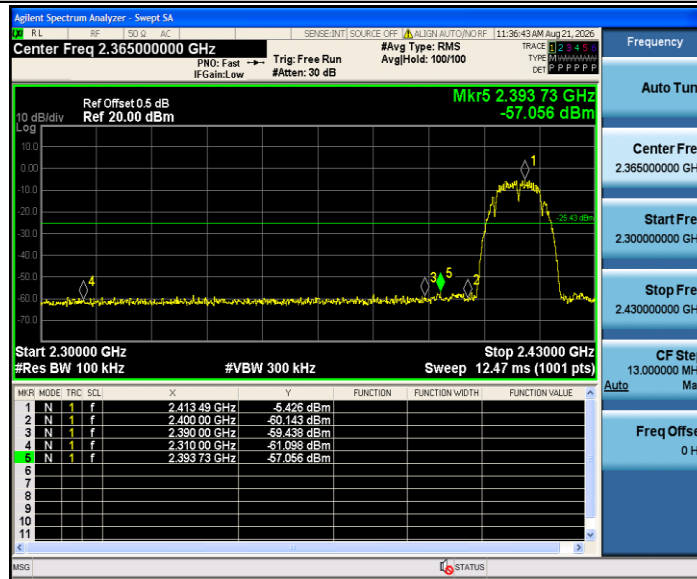


11B_Ant1_High_2462

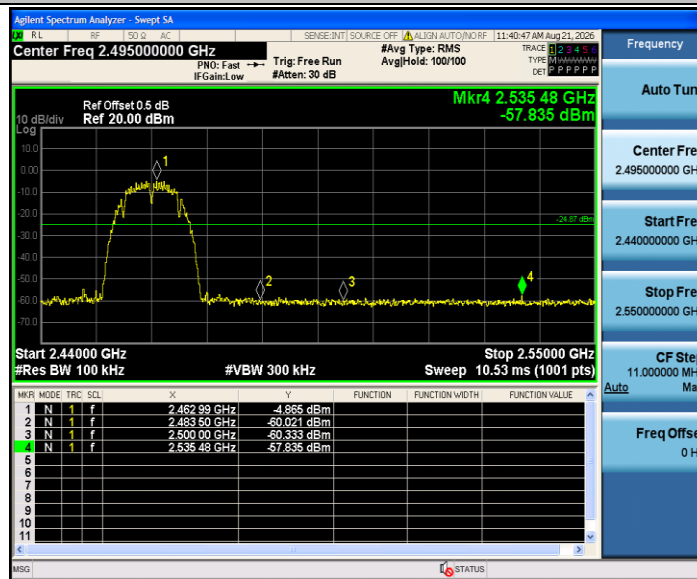


11G_Ant1_Low_2412

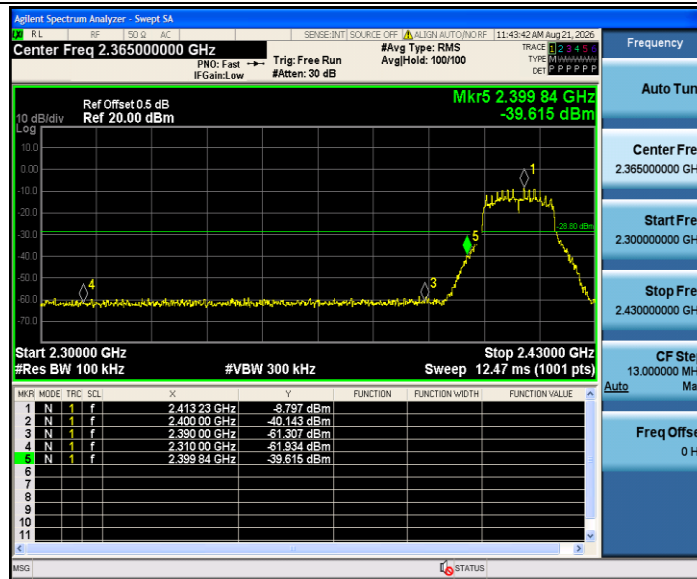


11G_Ant1_High_2462

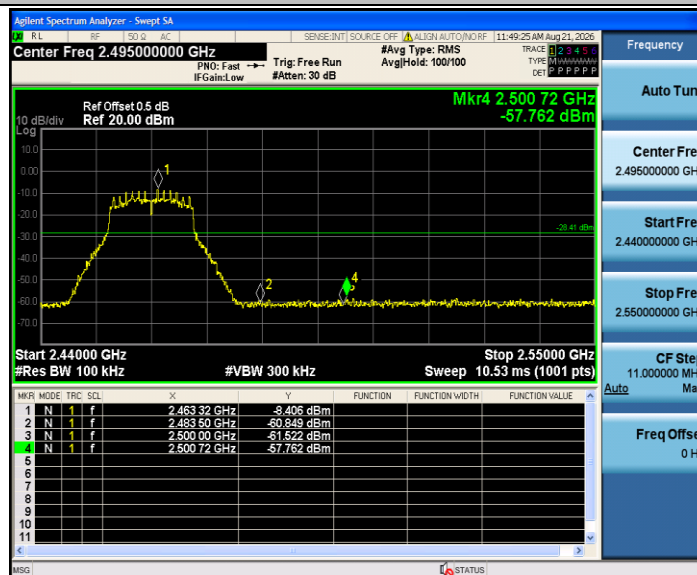


11N20SISO_Ant1_Low_2412

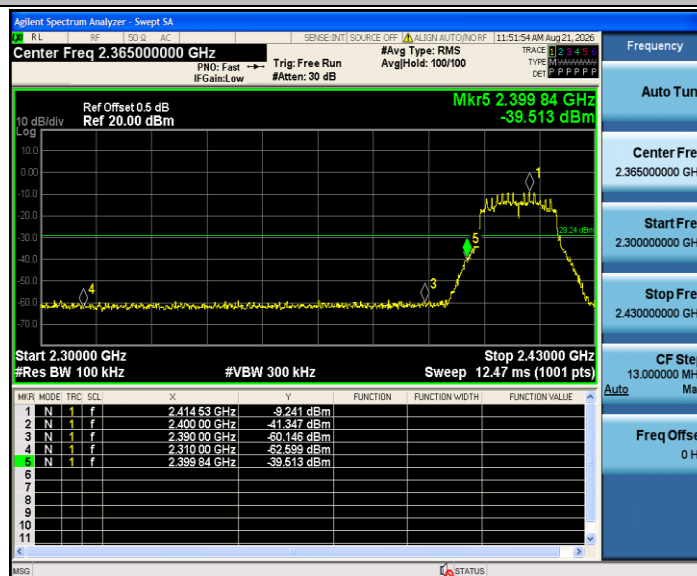


11N20SISO_Ant1_High_2462

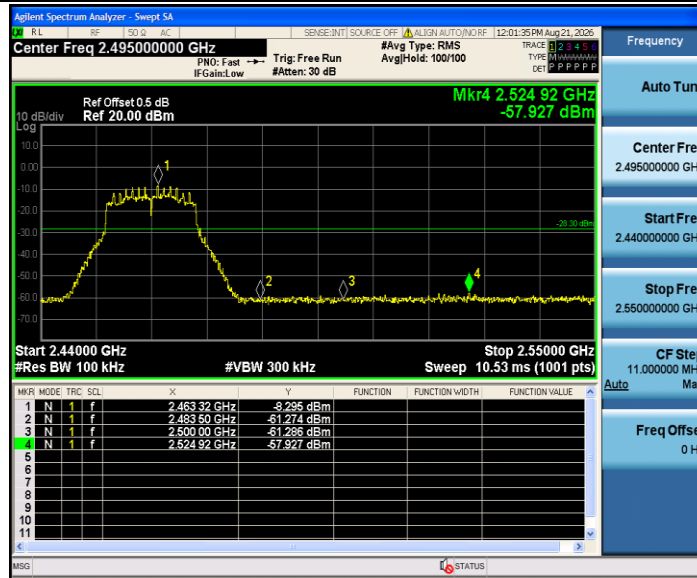

11N40SISO_Ant1_Low_2422

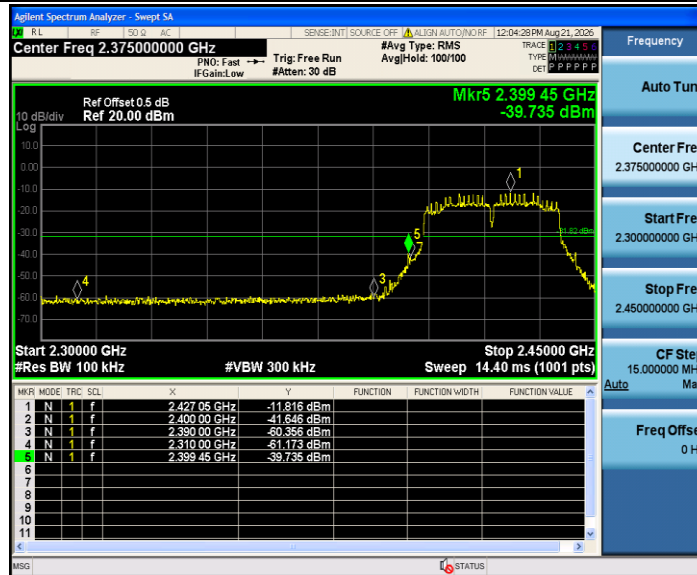

11N40SISO_Ant1_High_2452

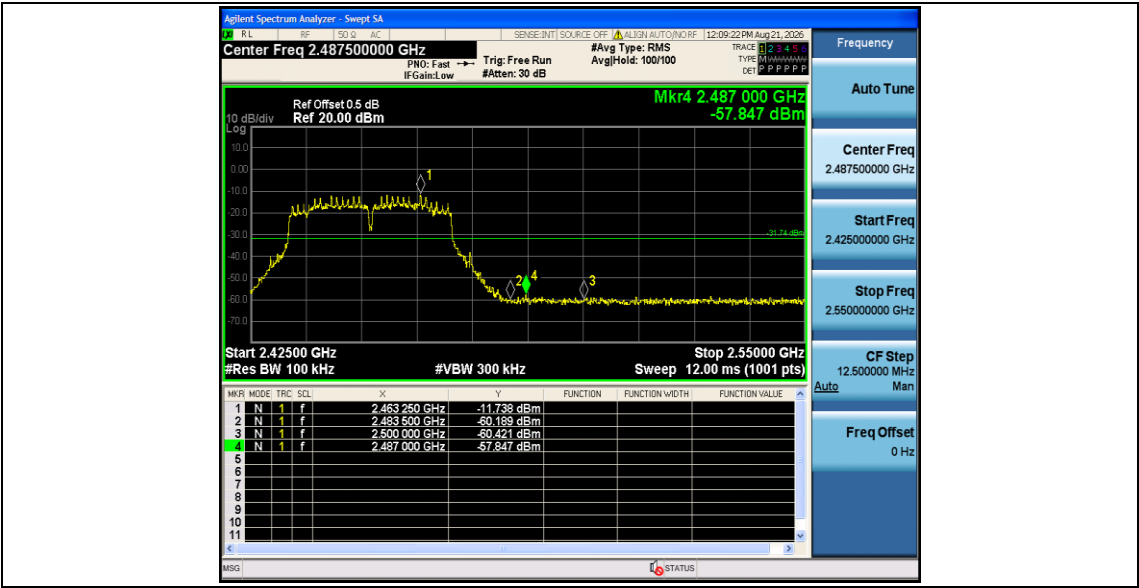


Appendix F: Conducted Spurious Emission

Test Result


TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	-5.47	-5.47	---	PASS
			30~1000	-5.47	-69.07	≤-25.47	PASS
			1000~26500	-5.47	-45.43	≤-25.47	PASS
		2437	Reference	-6.23	-6.23	---	PASS
			30~1000	-6.23	-64.69	≤-26.23	PASS
			1000~26500	-6.23	-46.58	≤-26.23	PASS
		2462	Reference	-5.35	-5.35	---	PASS
			30~1000	-5.35	-60.99	≤-25.35	PASS
			1000~26500	-5.35	-45.97	≤-25.35	PASS
11G	Ant1	2412	Reference	-10.95	-10.95	---	PASS
			30~1000	-10.95	-68.93	≤-30.95	PASS
			1000~26500	-10.95	-46.08	≤-30.95	PASS
		2437	Reference	-8.87	-8.87	---	PASS
			30~1000	-8.87	-69.13	≤-28.87	PASS
			1000~26500	-8.87	-46.11	≤-28.87	PASS
		2462	Reference	-8.97	-8.97	---	PASS
			30~1000	-8.97	-68.81	≤-28.97	PASS
			1000~26500	-8.97	-47.04	≤-28.97	PASS
11N20SISO	Ant1	2412	Reference	-9.24	-9.24	---	PASS
			30~1000	-9.24	-68.85	≤-29.24	PASS
			1000~26500	-9.24	-46.66	≤-29.24	PASS
		2437	Reference	-9.07	-9.07	---	PASS
			30~1000	-9.07	-68.73	≤-29.07	PASS
			1000~26500	-9.07	-46.56	≤-29.07	PASS
		2462	Reference	-8.69	-8.69	---	PASS
			30~1000	-8.69	-68.64	≤-28.69	PASS
			1000~26500	-8.69	-46.39	≤-28.69	PASS
11N40SISO	Ant1	2422	Reference	-12.33	-12.33	---	PASS
			30~1000	-12.33	-68.53	≤-32.33	PASS
			1000~26500	-12.33	-46.26	≤-32.33	PASS
		2437	Reference	-12.28	-12.28	---	PASS
			30~1000	-12.28	-68.31	≤-32.28	PASS
			1000~26500	-12.28	-45.95	≤-32.28	PASS
		2452	Reference	-12.36	-12.36	---	PASS
			30~1000	-12.36	-68.32	≤-32.36	PASS
			1000~26500	-12.36	-46.62	≤-32.36	PASS

Test Graphs


11B_Ant1_2412_0~Reference

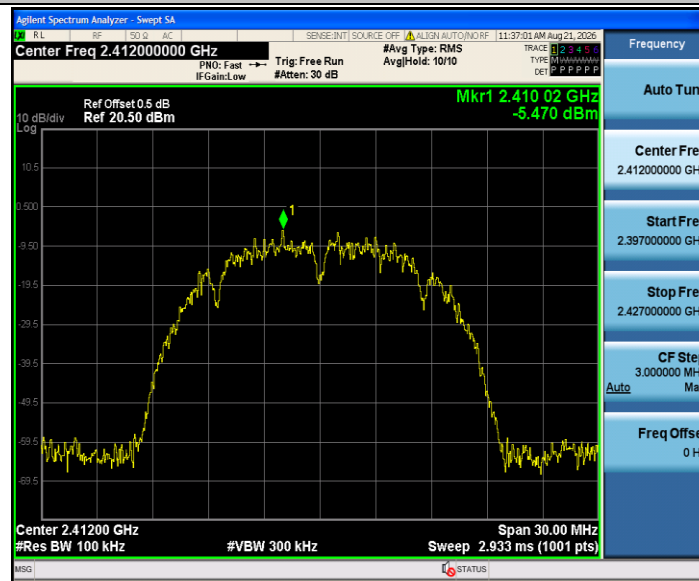


11B_Ant1_2412_30~1000

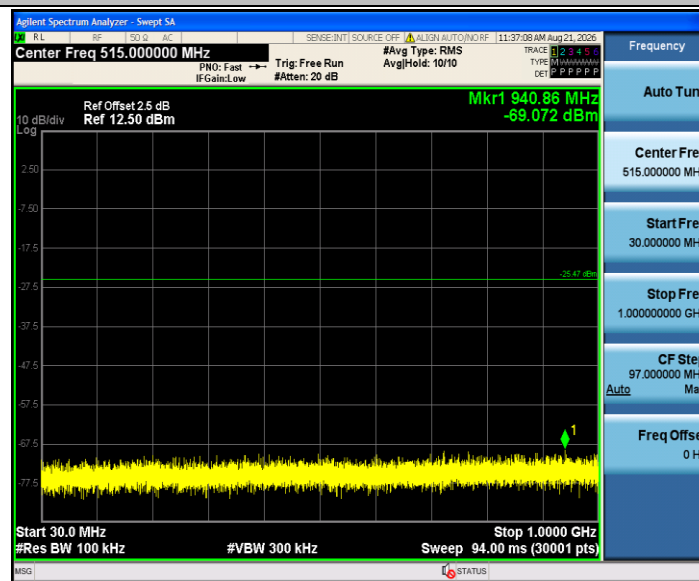


11B_Ant1_2412_1000~26500

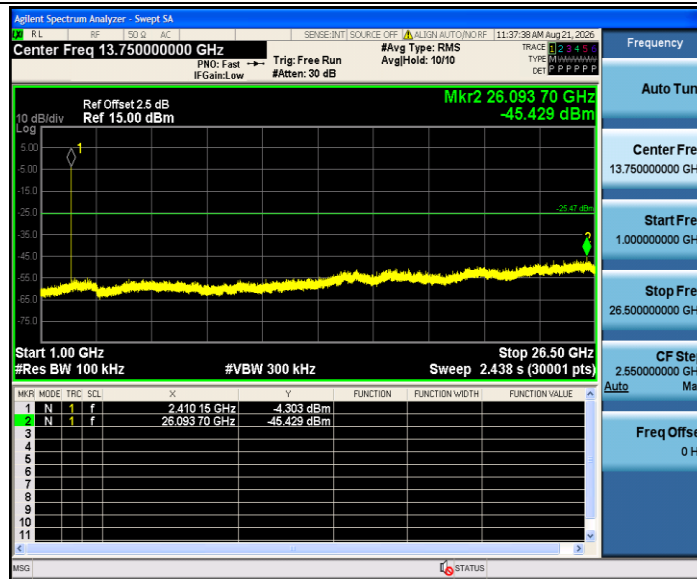


11B_Ant1_2437_0~Reference

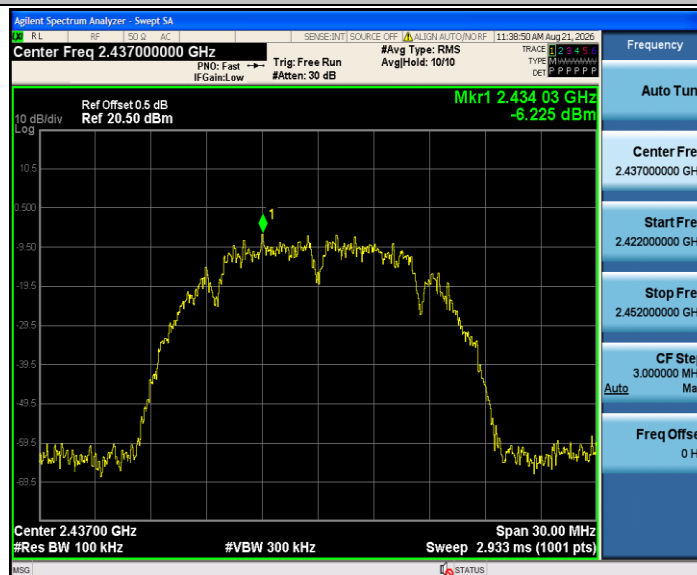

11B_Ant1_2437_30~1000

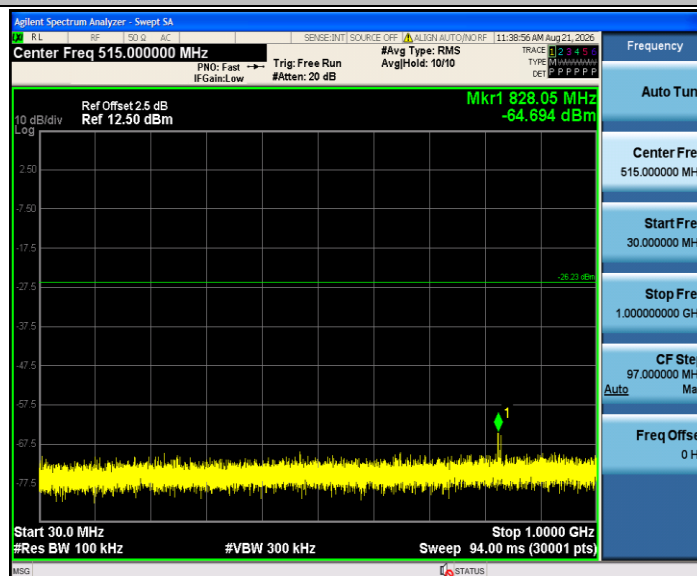


11B_Ant1_2437_1000~26500

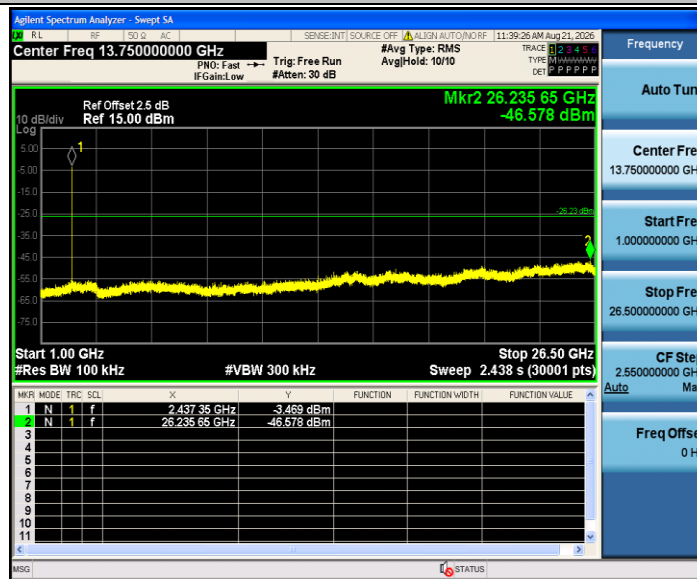


11B_Ant1_2462_0~Reference




11B_Ant1_2462_30~1000

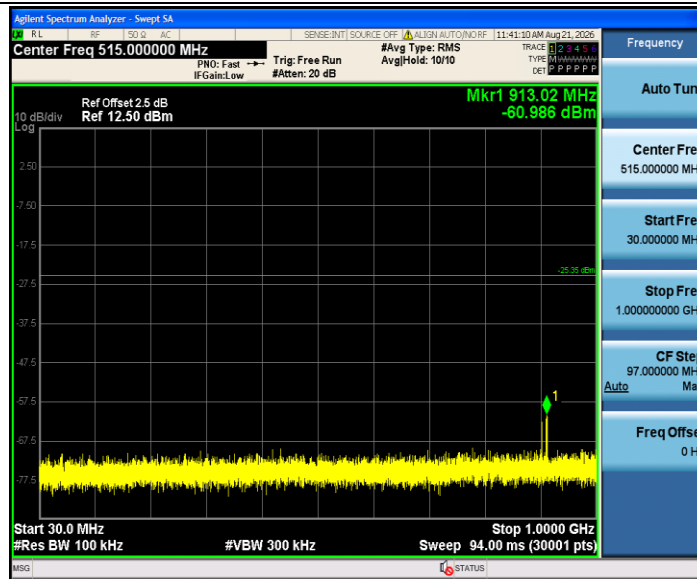


11B_Ant1_2462_1000~26500

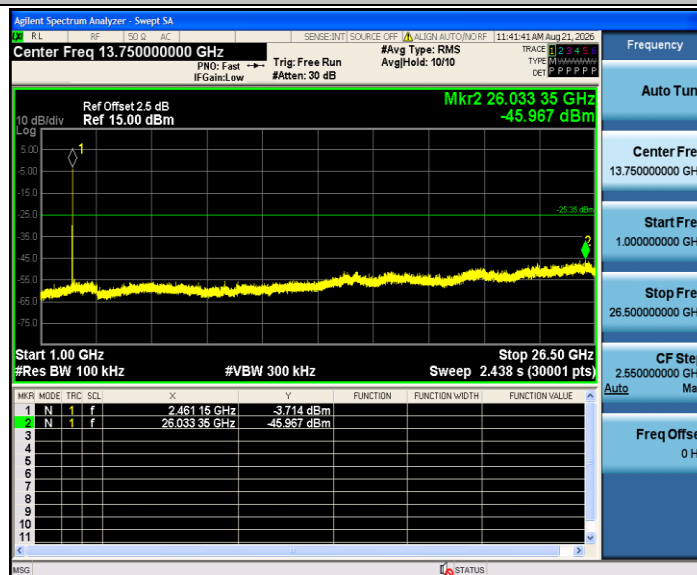


11G_Ant1_2412_0~Reference

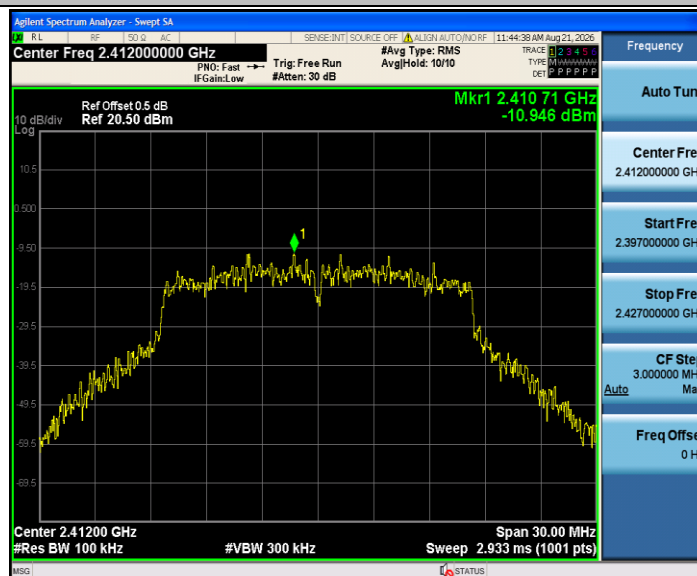


11G_Ant1_2412_30~1000

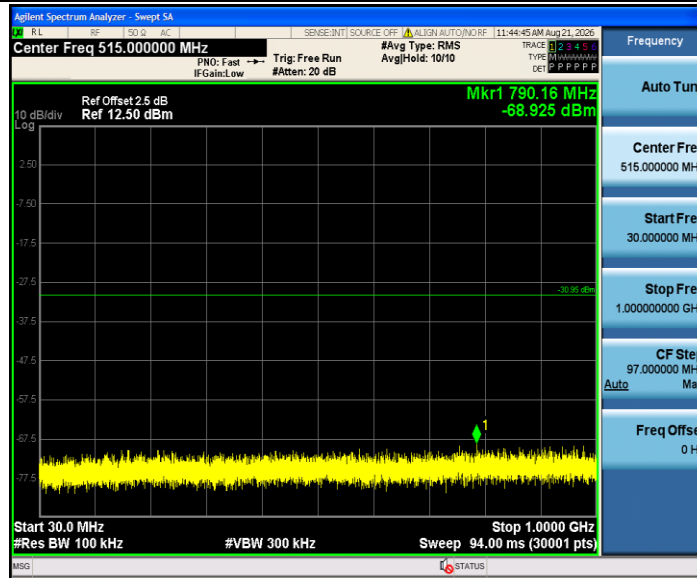


11G_Ant1_2412_1000~26500

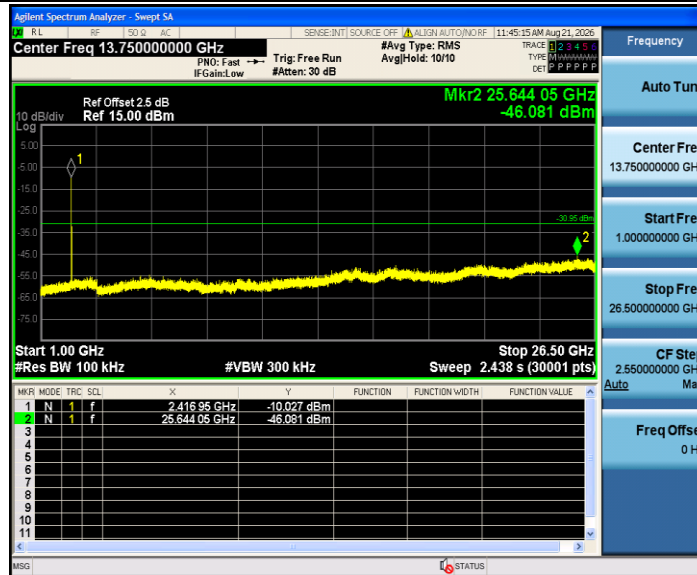


11G_Ant1_2437_0~Reference

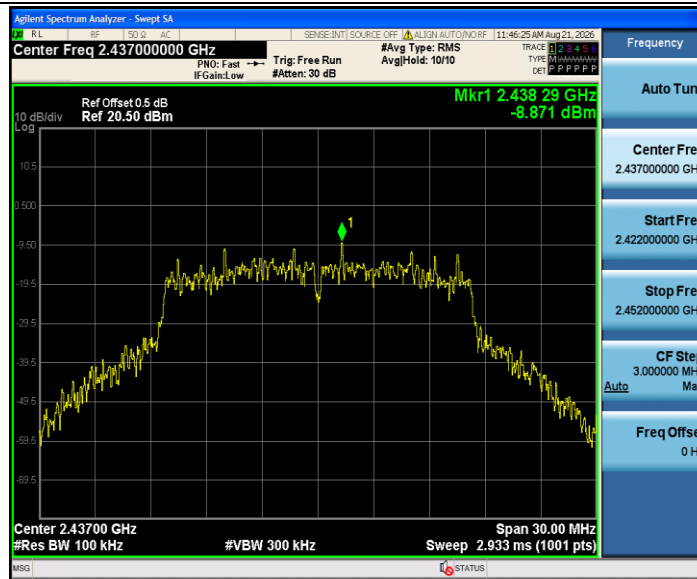

11G_Ant1_2437_30~1000

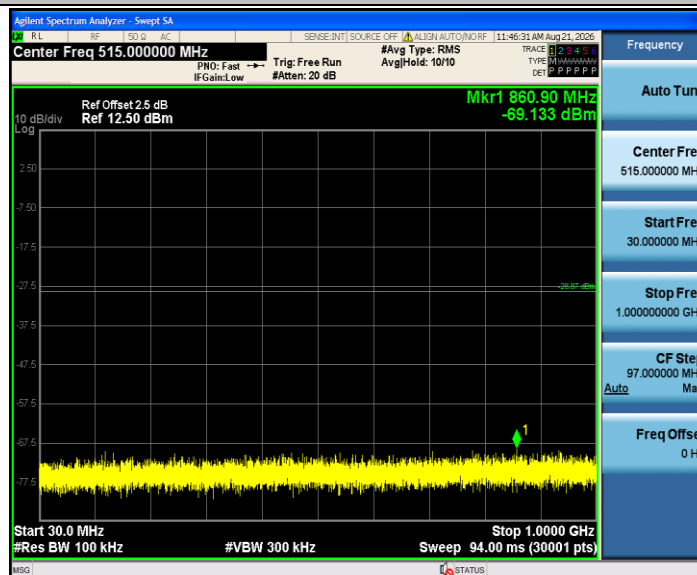


11G_Ant1_2437_1000~26500

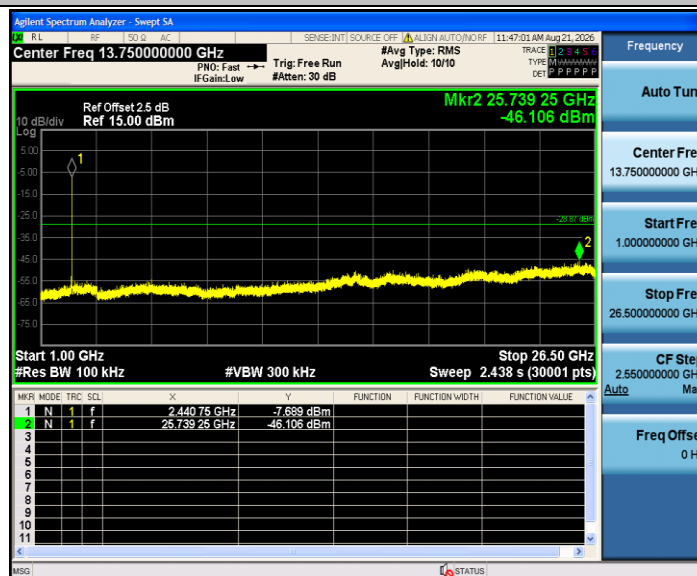


11G_Ant1_2462_0~Reference




11G_Ant1_2462_30~1000

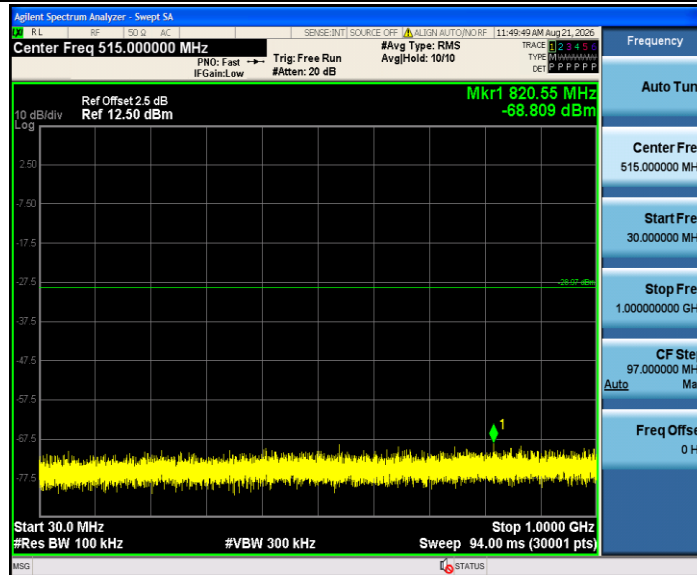

11G_Ant1_2462_1000~26500

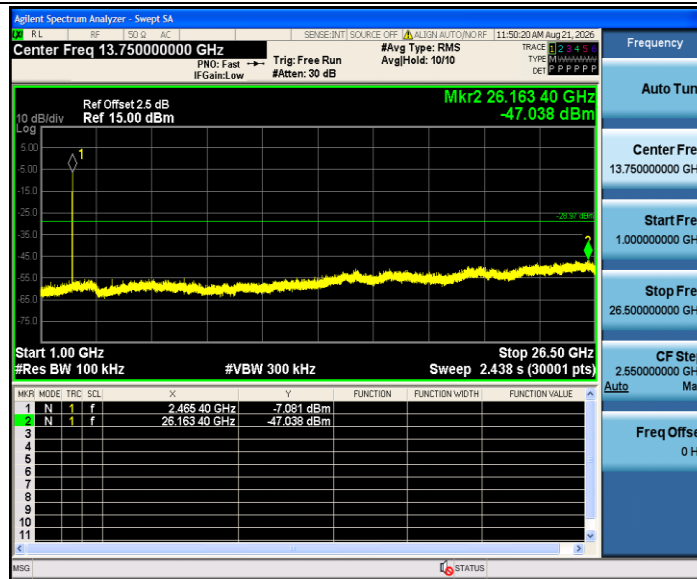

11N20SISO_Ant1_2412_0~Reference

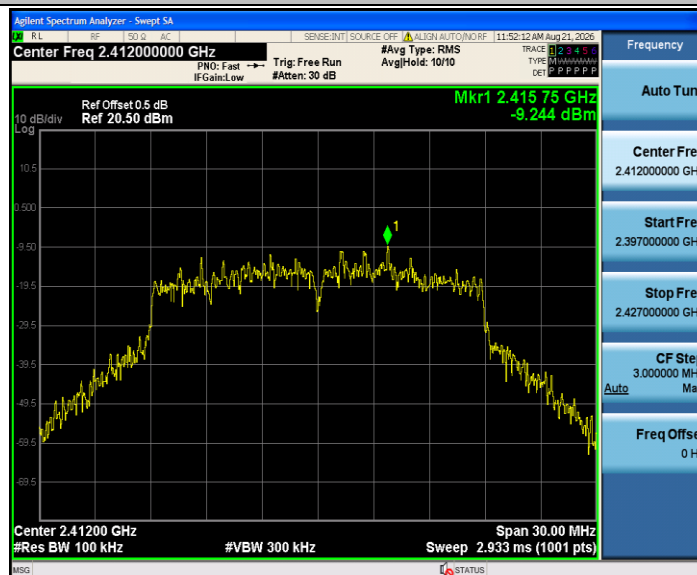

11N20SISO_Ant1_2412_30~1000

