

FCC Appendix RF Test Data for BT

FCC ID : 2BPRF-BP4SL3V3

Company : Shenzhen WestMicro Digital Technology Co., Ltd.

EUT : LinkPower 3

Model Number : BP4SL3V3

Report No. : CTA26042002801

Reviewed By : Eric Wang

Appendix A: 20dB Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.963	2401.544	2402.507	---	---
		2441	0.939	2440.553	2441.492	---	---
		2480	0.954	2479.547	2480.501	---	---
2DH5	Ant1	2402	1.329	2401.343	2402.672	---	---
		2441	1.347	2440.337	2441.684	---	---
		2480	1.362	2479.331	2480.693	---	---
3DH5	Ant1	2402	1.317	2401.358	2402.675	---	---
		2441	1.287	2440.364	2441.651	---	---
		2480	1.305	2479.361	2480.666	---	---

Test Graphs

DH5_Ant1_2402



DH5_Ant1_2441



DH5_Ant1_2480



2DH5_Ant1_2402



2DH5_Ant1_2441



2DH5_Ant1_2480



3DH5_Ant1_2402



3DH5_Ant1_2441



3DH5_Ant1_2480




Appendix B: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.85797	2401.5860	2402.4440	---	---
		2441	0.86181	2440.5803	2441.4421	---	---
		2480	0.86527	2479.5785	2480.4438	---	---
2DH5	Ant1	2402	1.1930	2401.4145	2402.6075	---	---
		2441	1.1845	2440.4184	2441.6029	---	---
		2480	1.1905	2479.4161	2480.6066	---	---
3DH5	Ant1	2402	1.1944	2401.4132	2402.6076	---	---
		2441	1.1917	2440.4158	2441.6075	---	---
		2480	1.1919	2479.4165	2480.6084	---	---

Test Graphs

DH5_Ant1_2402

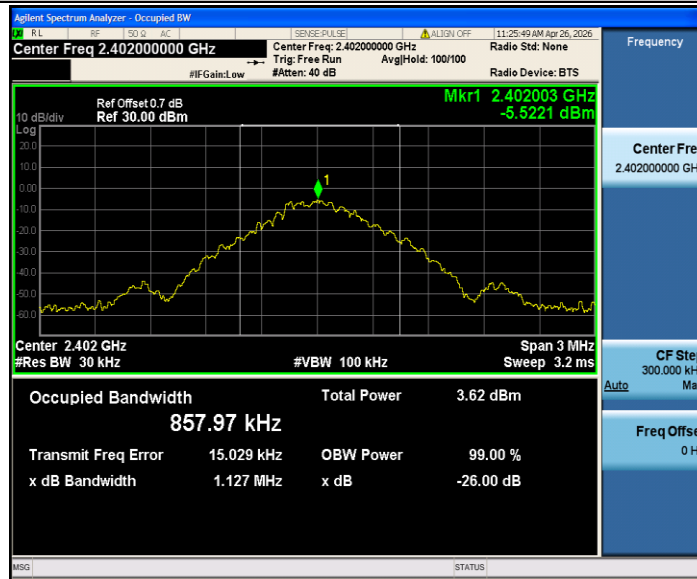

DH5_Ant1_2441



DH5_Ant1_2480



2DH5_Ant1_2402



2DH5_Ant1_2441



2DH5_Ant1_2480



3DH5_Ant1_2402



3DH5_Ant1_2441



3DH5_Ant1_2480



Appendix C: Maximum conducted output power

Test Result Peak


Test Mode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	-2.93	≤20.97	PASS
		2441	-3.54	≤20.97	PASS
		2480	-3.77	≤20.97	PASS
2DH5	Ant1	2402	-0.37	≤20.97	PASS
		2441	-0.91	≤20.97	PASS
		2480	-1.17	≤20.97	PASS
3DH5	Ant1	2402	0.09	≤20.97	PASS
		2441	-0.57	≤20.97	PASS
		2480	-0.79	≤20.97	PASS

Appendix D: Carrier frequency separation

Test Result

TestMode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.998	≥ 0.963	PASS
2DH5	Ant1	Hop	1.026	≥ 0.908	PASS
3DH5	Ant1	Hop	0.984	≥ 0.878	PASS

Test Graphs

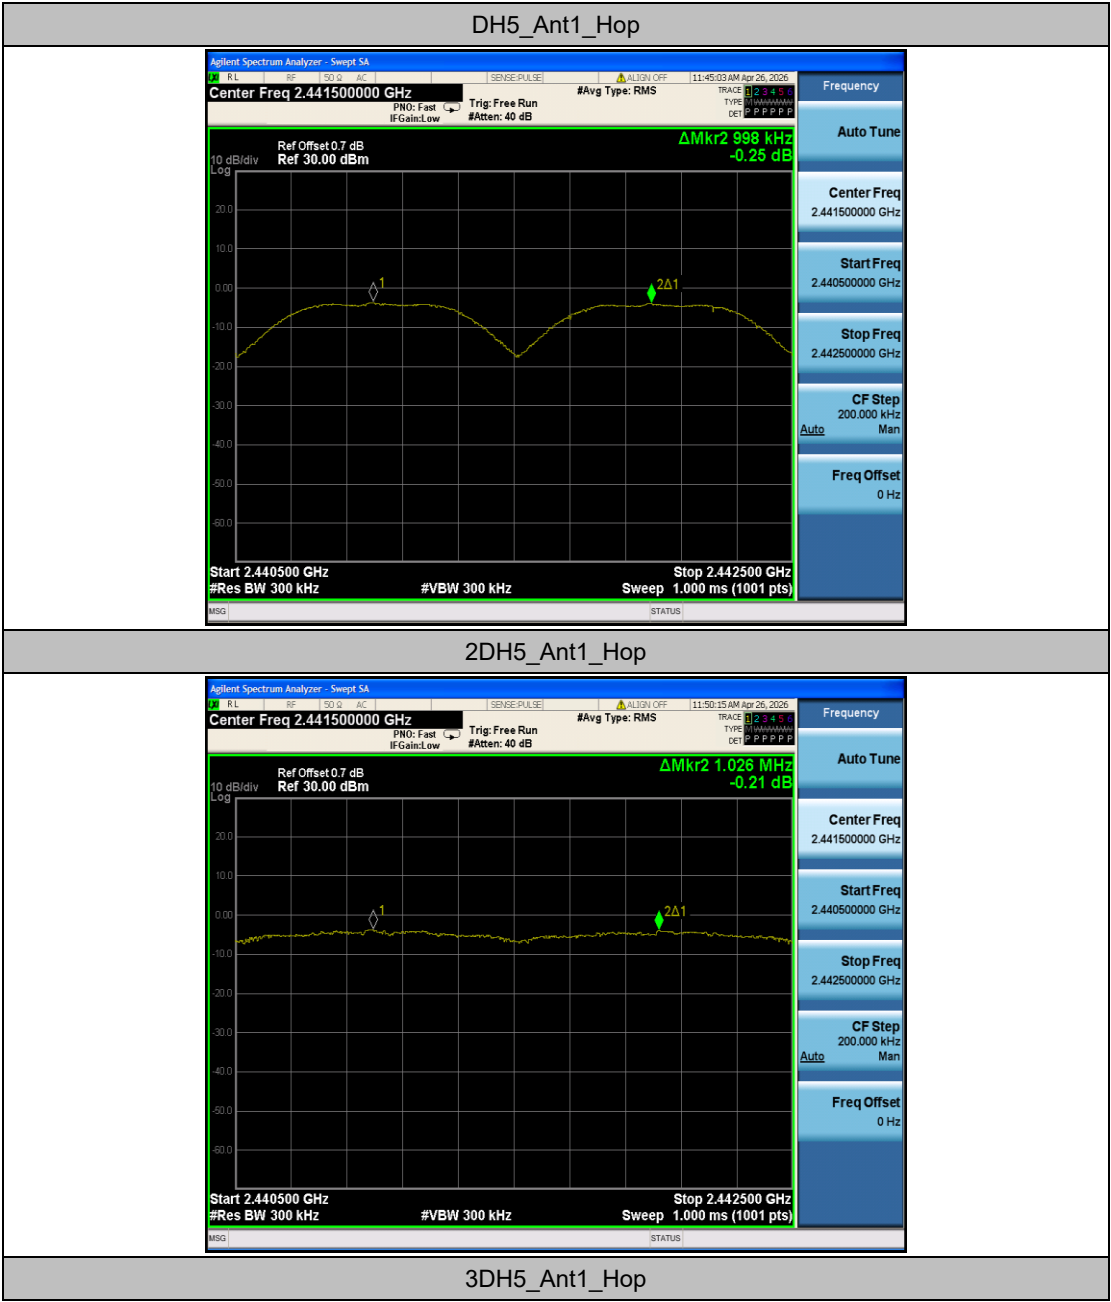




Appendix E: Time of occupancy



Test Result

TestMode	Antenna	Freq(MHz)	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.405	316	0.128	≤0.4	PASS
DH3	Ant1	Hop	1.662	151	0.251	≤0.4	PASS
DH5	Ant1	Hop	2.910	110	0.32	≤0.4	PASS
2DH1	Ant1	Hop	0.415	316	0.131	≤0.4	PASS
2DH3	Ant1	Hop	1.668	157	0.262	≤0.4	PASS
2DH5	Ant1	Hop	2.916	108	0.315	≤0.4	PASS
3DH1	Ant1	Hop	0.415	319	0.132	≤0.4	PASS
3DH3	Ant1	Hop	1.667	156	0.26	≤0.4	PASS
3DH5	Ant1	Hop	2.917	120	0.35	≤0.4	PASS


Test Graphs

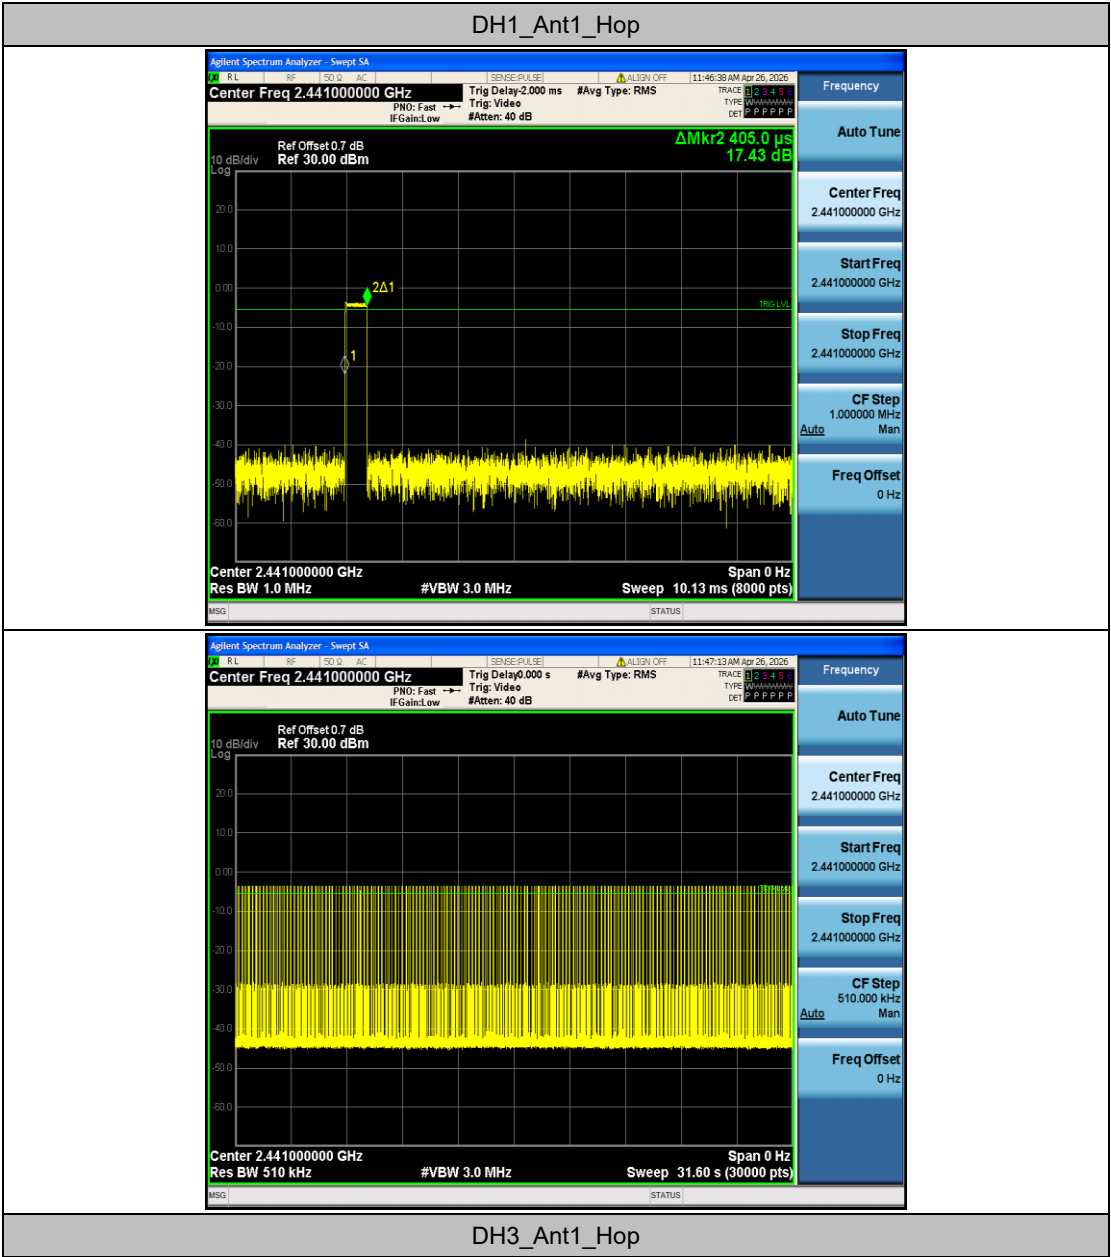


DH3_Ant1_Hop

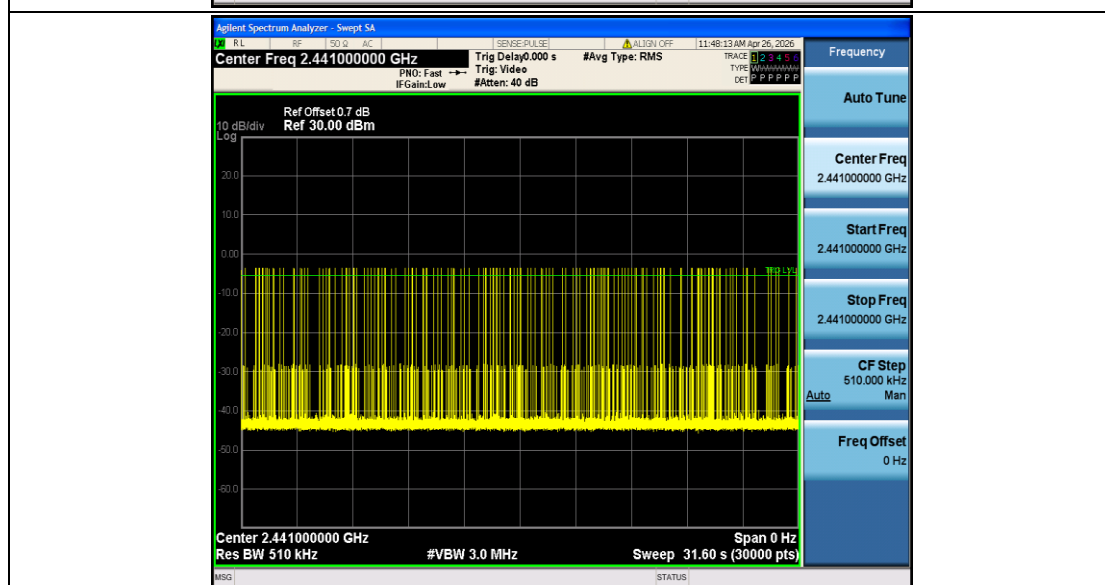
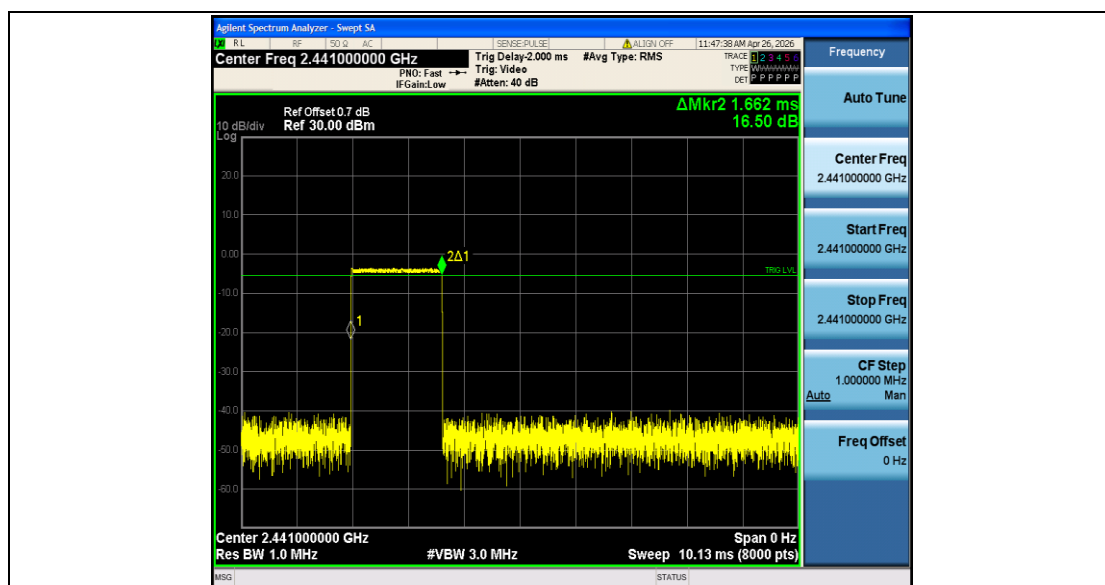


DH5_Ant1_Hop


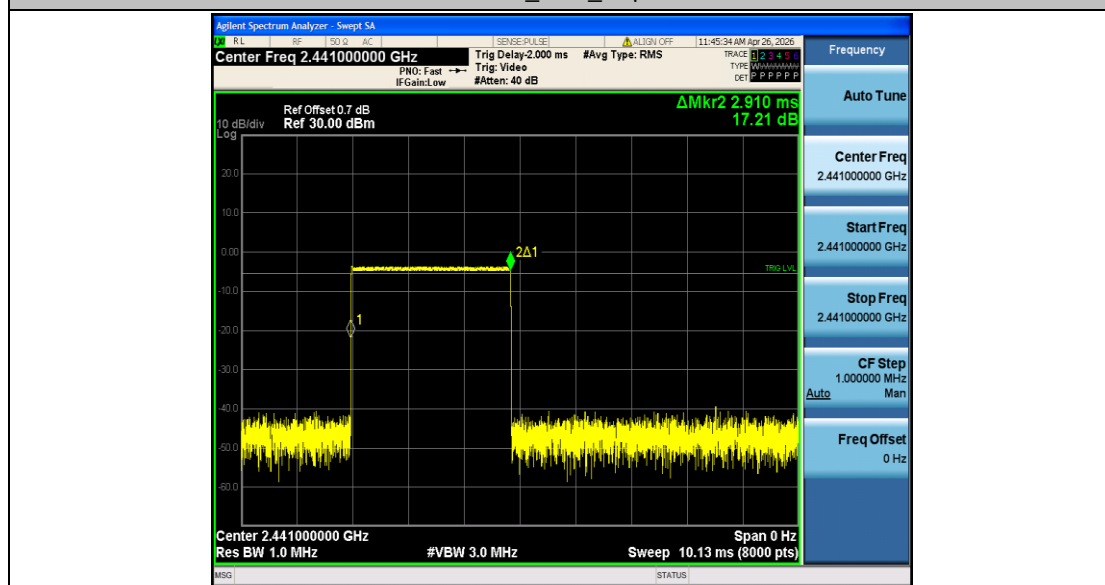


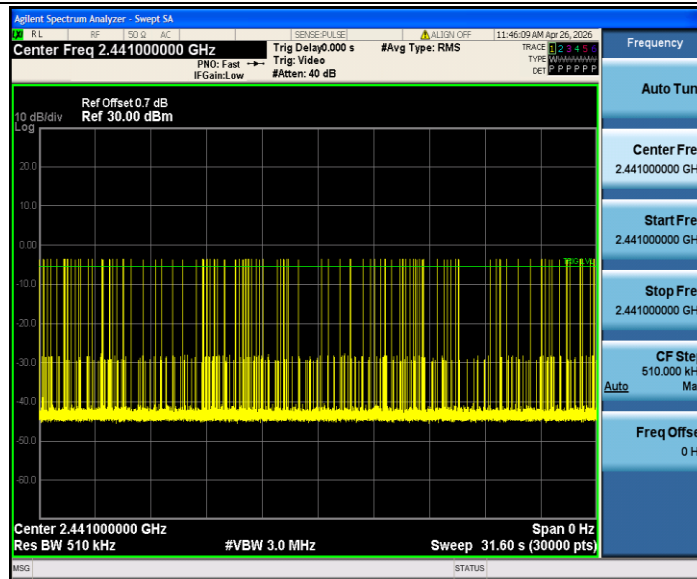


2DH1_Ant1_Hop

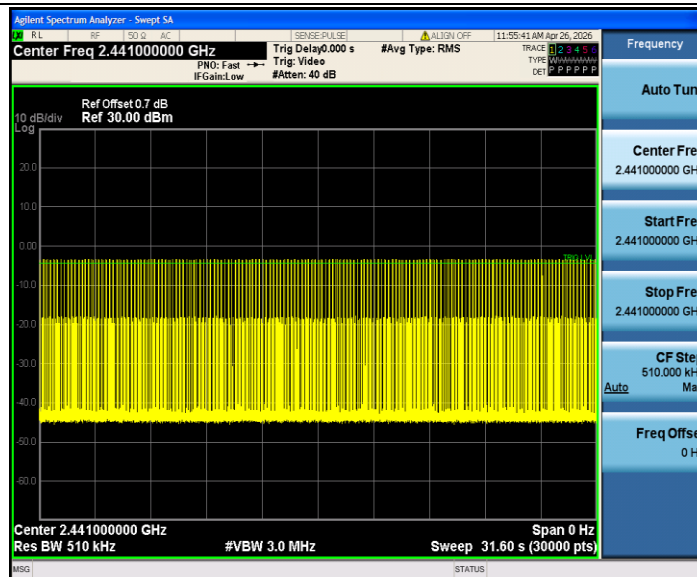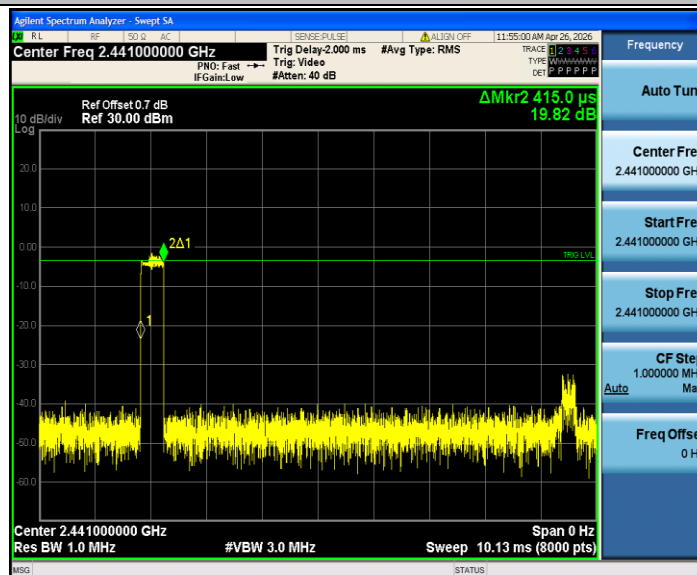


2DH3_Ant1_Hop

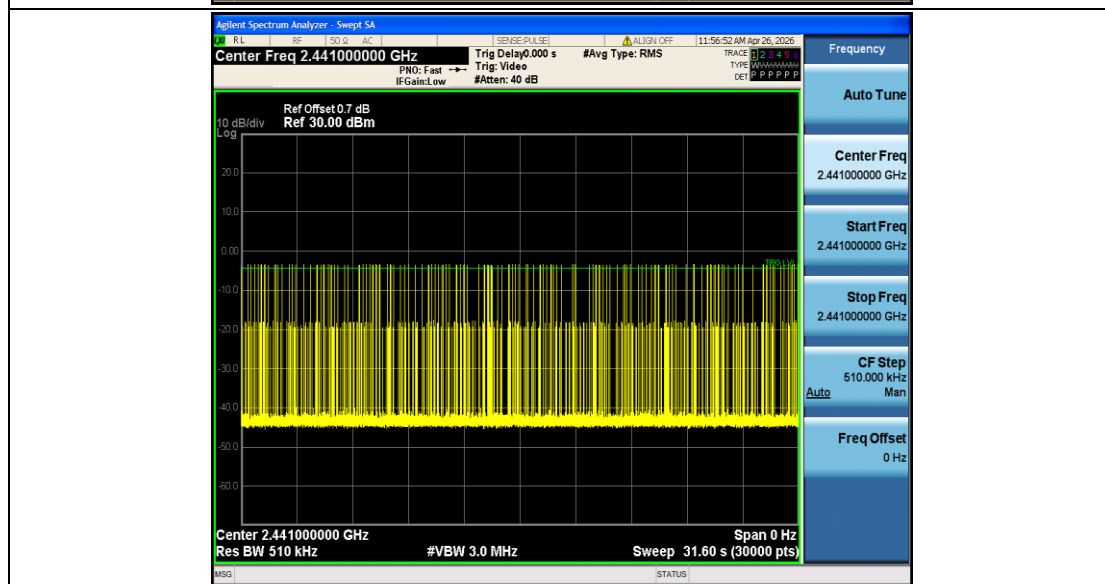
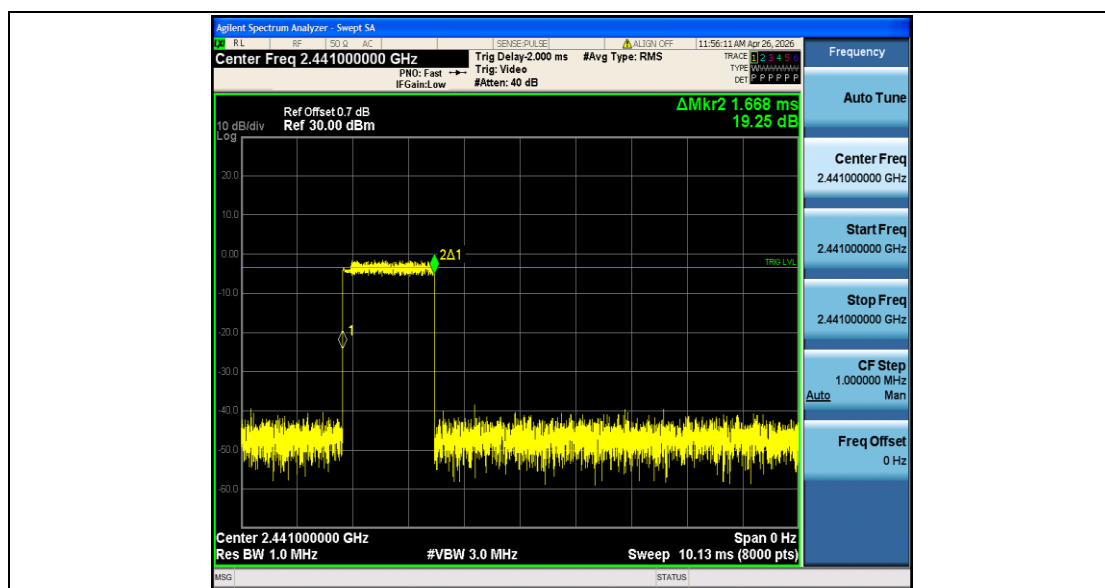


2DH5_Ant1_Hop


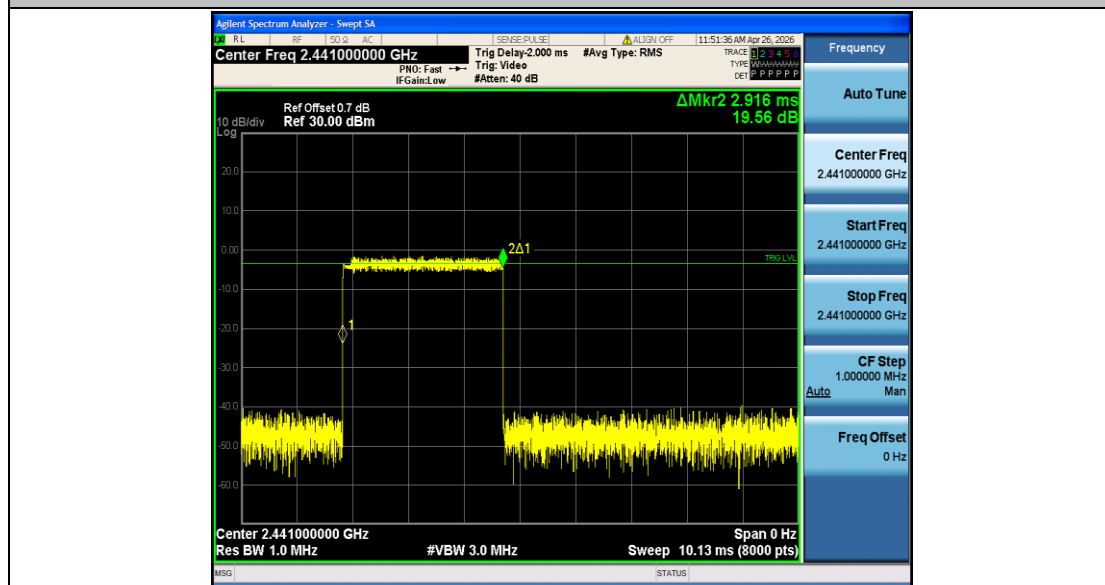


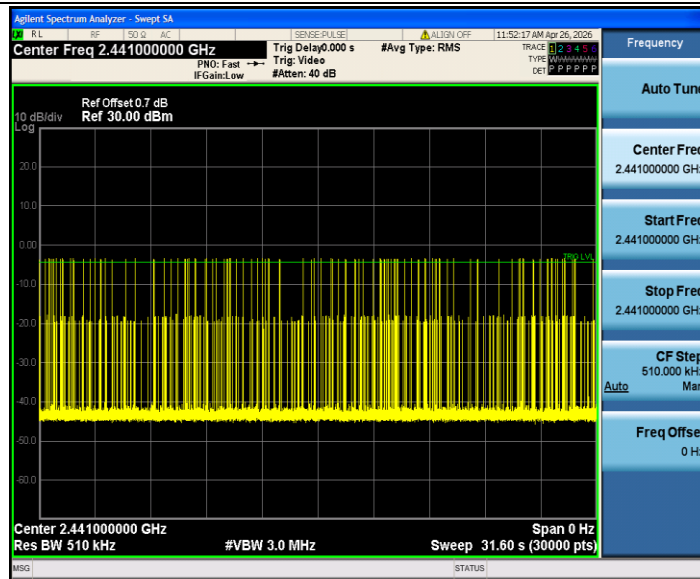


3DH1_Ant1_Hop

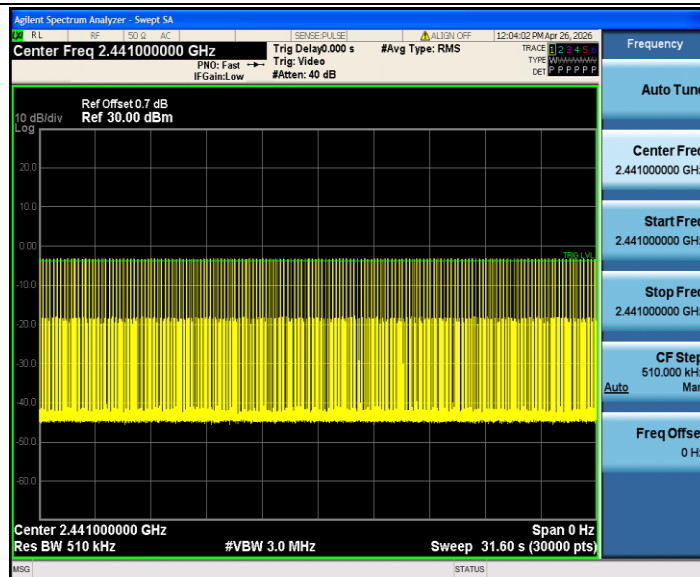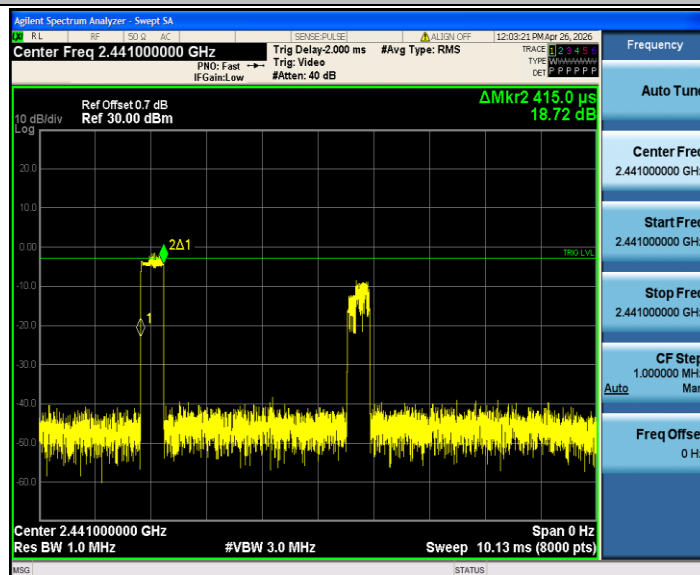


3DH3_Ant1_Hop

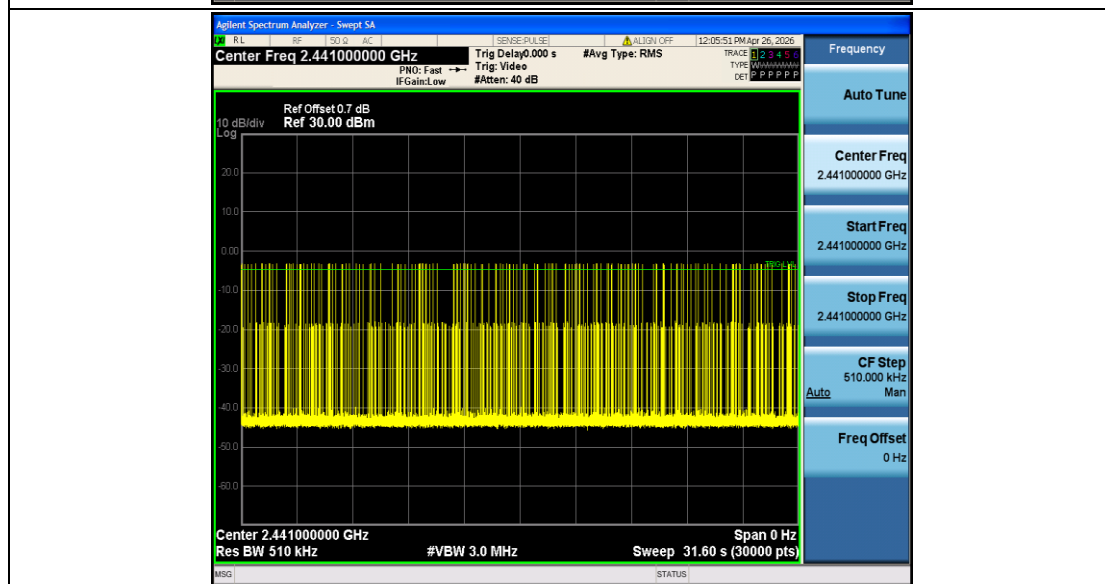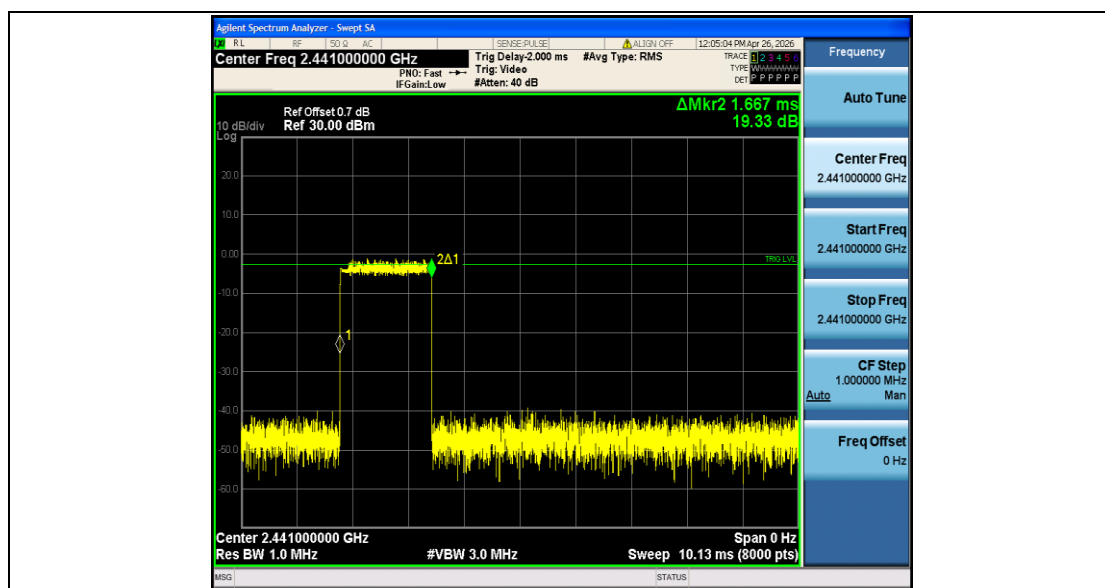

3DH5_Ant1_Hop

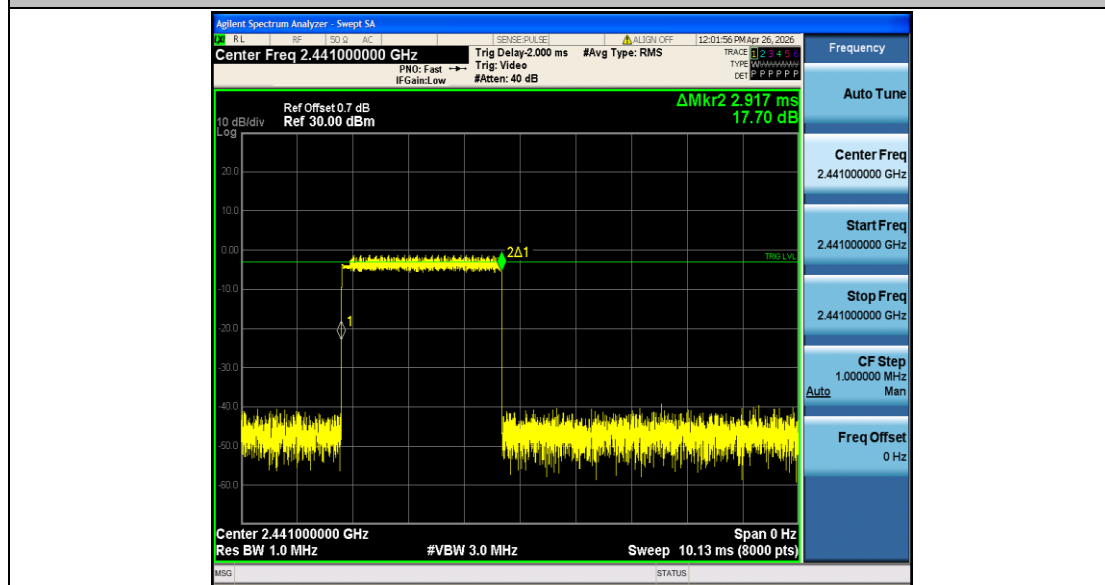

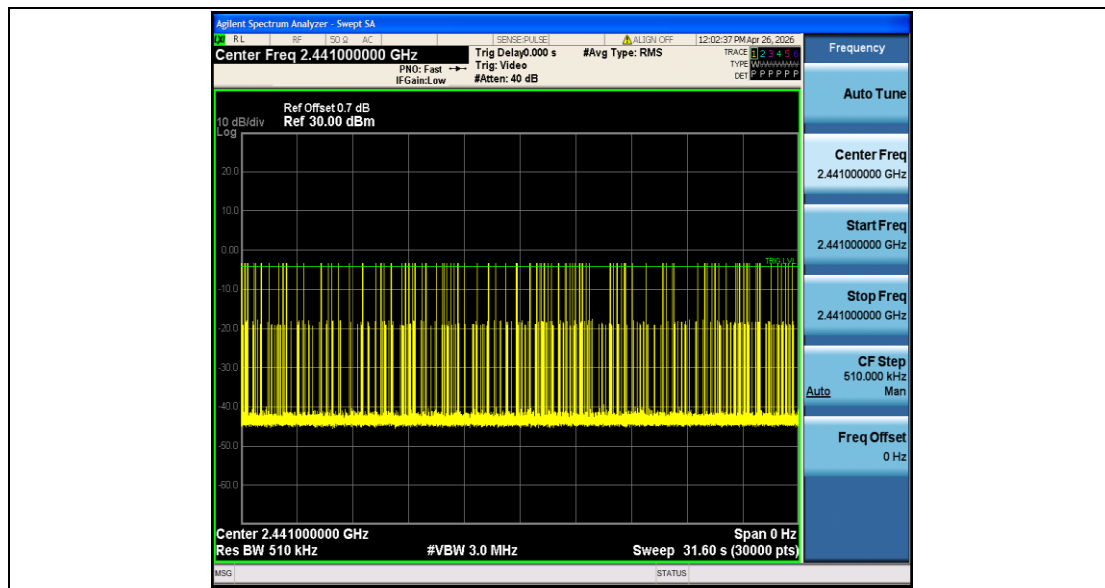



Appendix F: Number of hopping channels

Test Result

TestMode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

Test Graphs

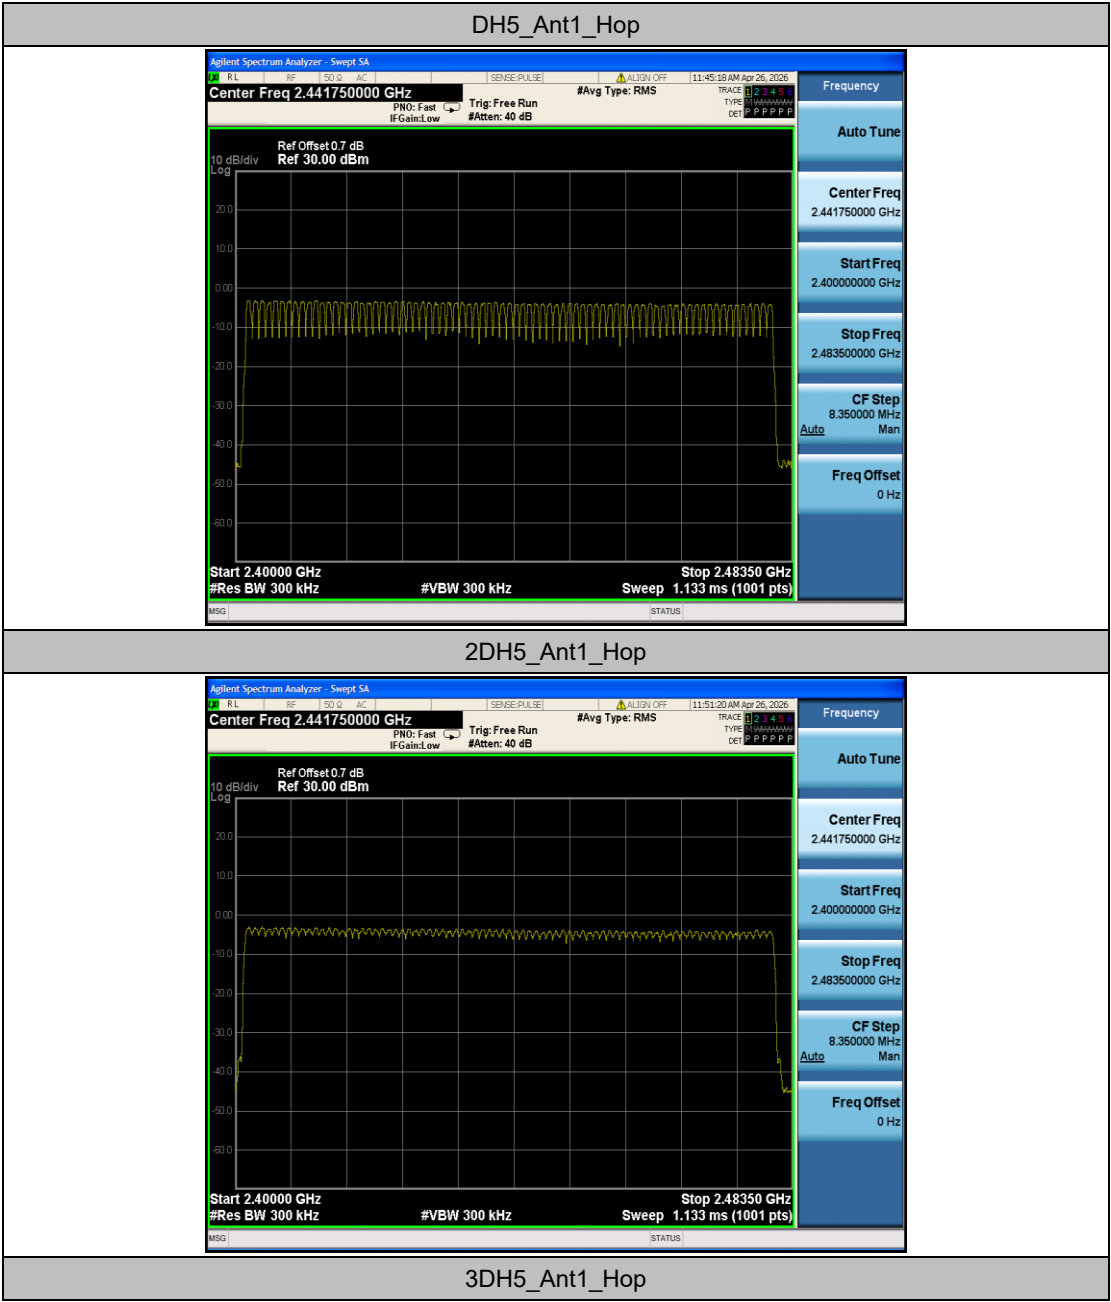

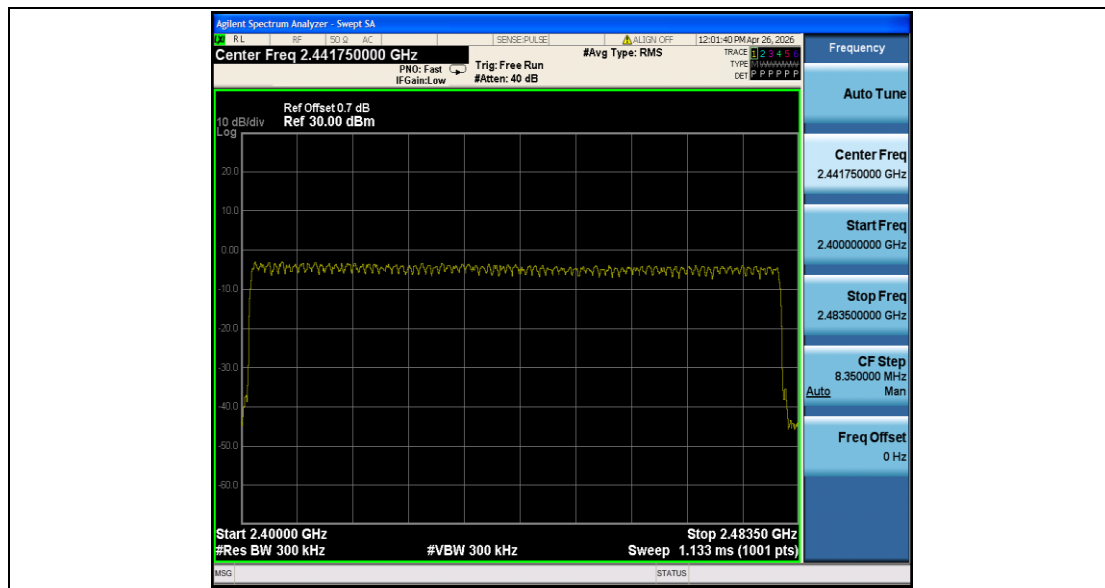



Appendix G: Band edge measurements

Test Result


TestMode	Antenna	ChName	Freq(MHz)	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-3.53	-56.86	≤-23.53	PASS
		High	2480	-4.03	-55.96	≤-24.03	PASS
		Low	Hop_2402	-4.35	-57.19	≤-24.35	PASS
		High	Hop_2480	-4.02	-57.4	≤-24.02	PASS
2DH5	Ant1	Low	2402	-5.57	-56.74	≤-25.57	PASS
		High	2480	-4.14	-57.02	≤-24.14	PASS
		Low	Hop_2402	-3.86	-54.97	≤-23.86	PASS
		High	Hop_2480	-4.02	-57.1	≤-24.02	PASS
3DH5	Ant1	Low	2402	-4.47	-56.92	≤-24.47	PASS
		High	2480	-4.02	-57.99	≤-24.02	PASS
		Low	Hop_2402	-5.80	-57.19	≤-25.8	PASS
		High	Hop_2480	-4.45	-56.48	≤-24.45	PASS

Test Graphs

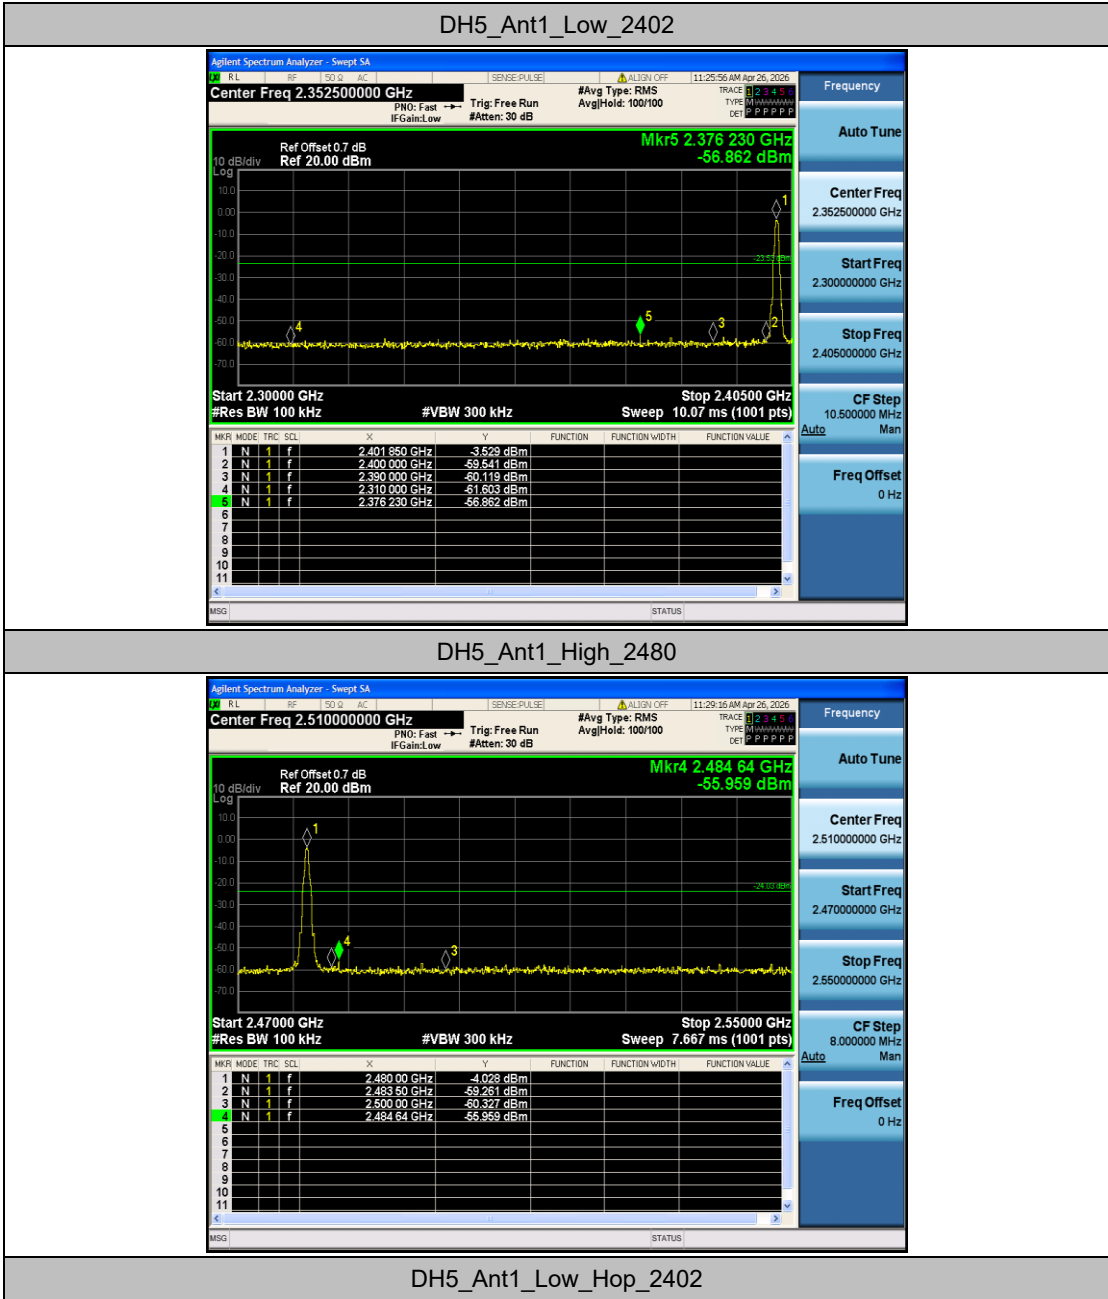


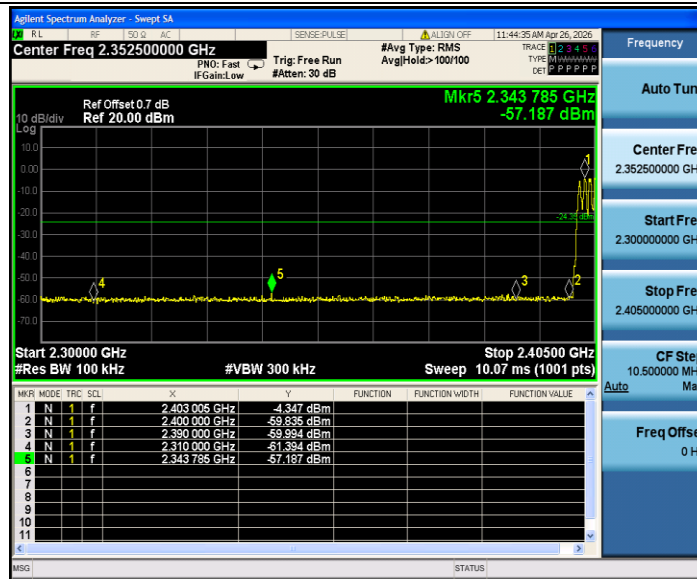


DH5_Ant1_High_Hop_2480

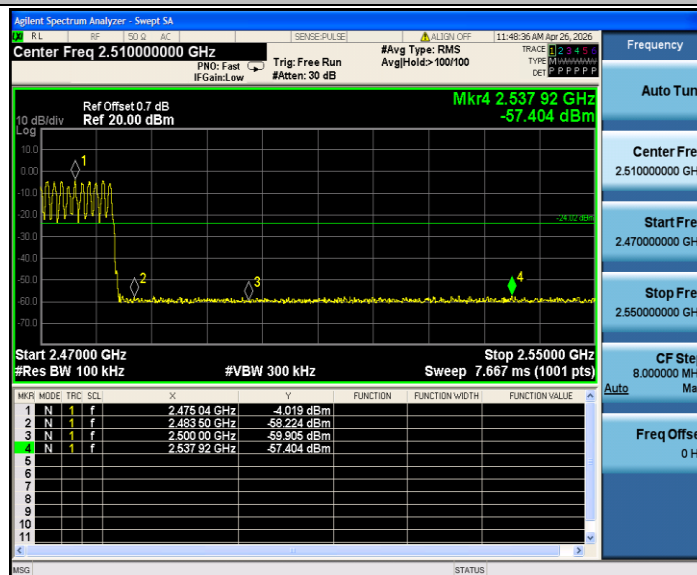


2DH5_Ant1_Low_2402

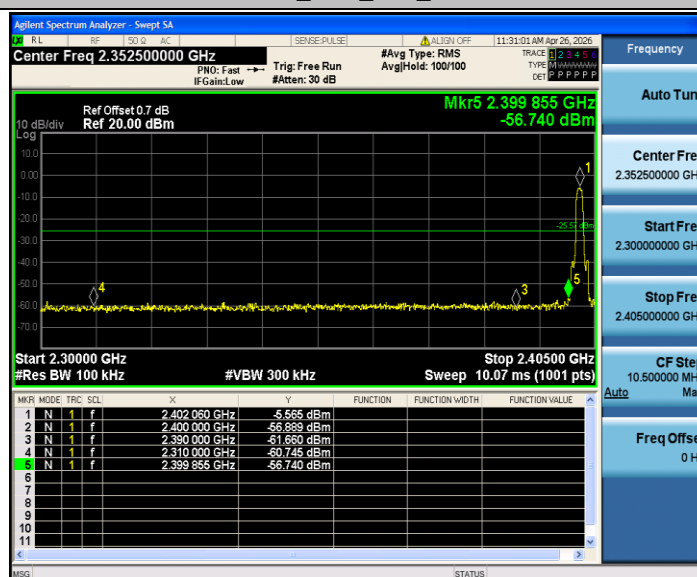


2DH5_Ant1_High_2480

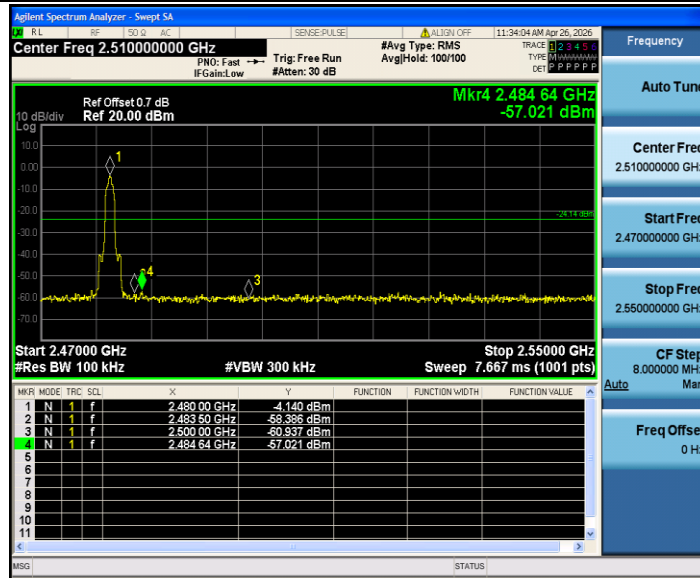


2DH5_Ant1_Low_Hop_2402

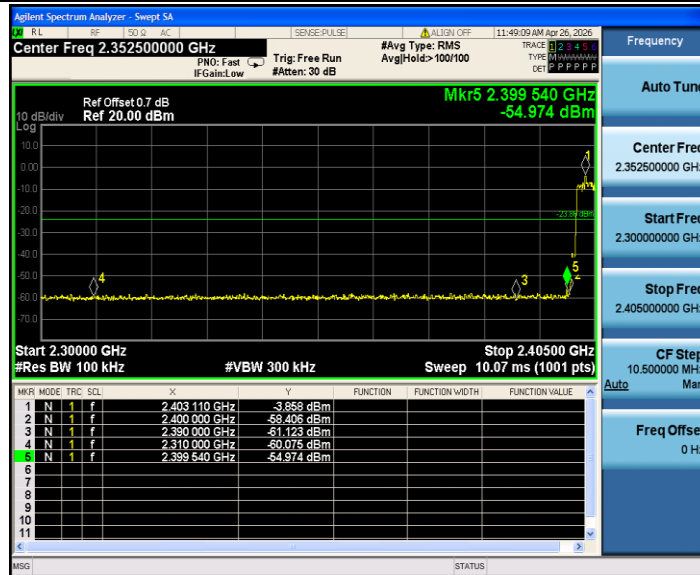


2DH5_Ant1_High_Hop_2480

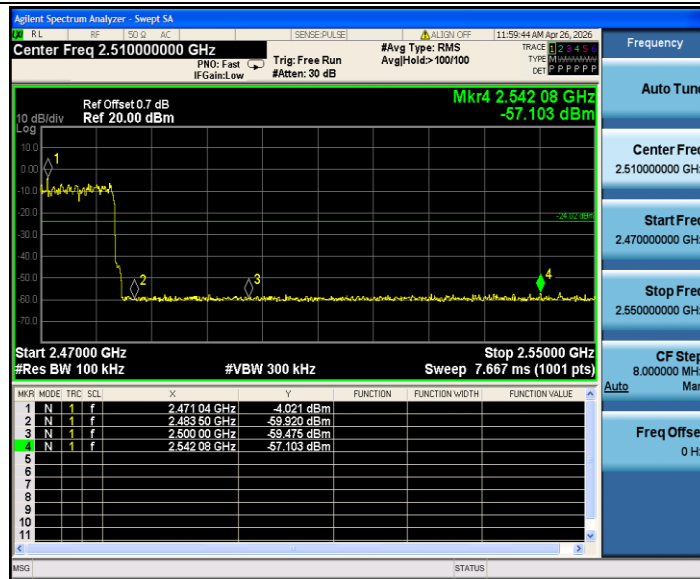


3DH5_Ant1_Low_2402

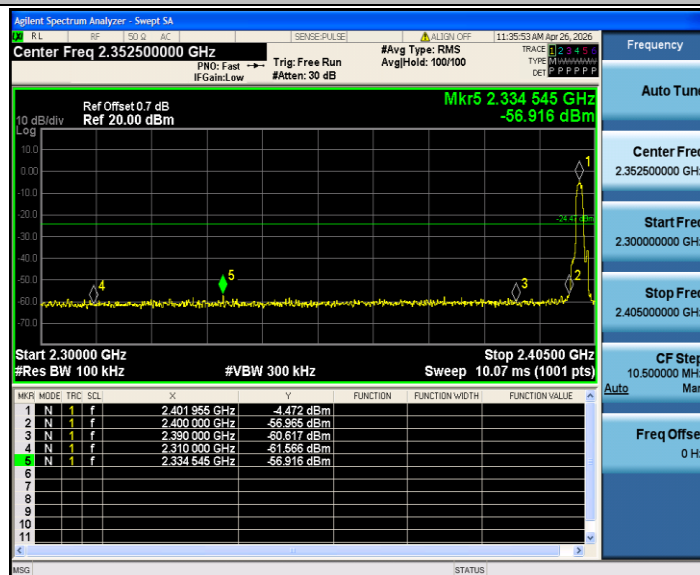


3DH5_Ant1_High_2480

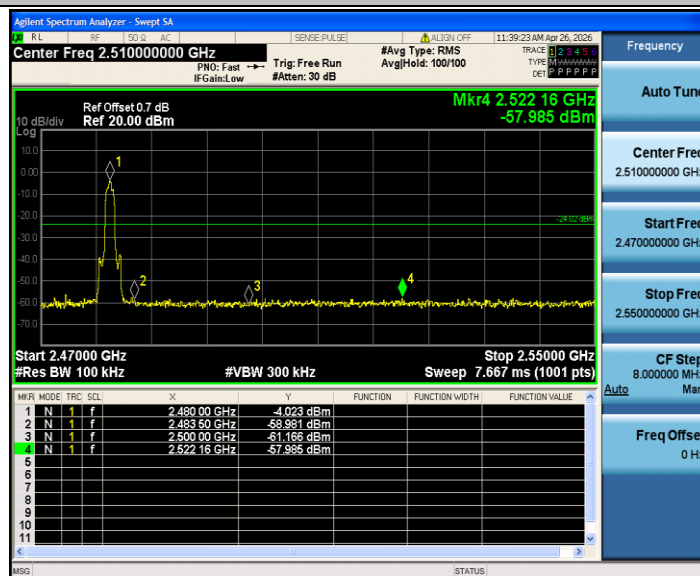

3DH5_Ant1_Low_Hop_2402

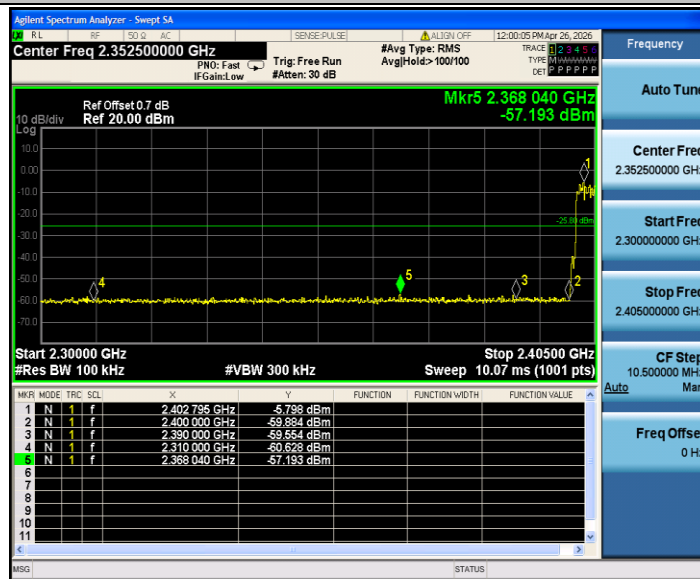

3DH5_Ant1_High_Hop_2480

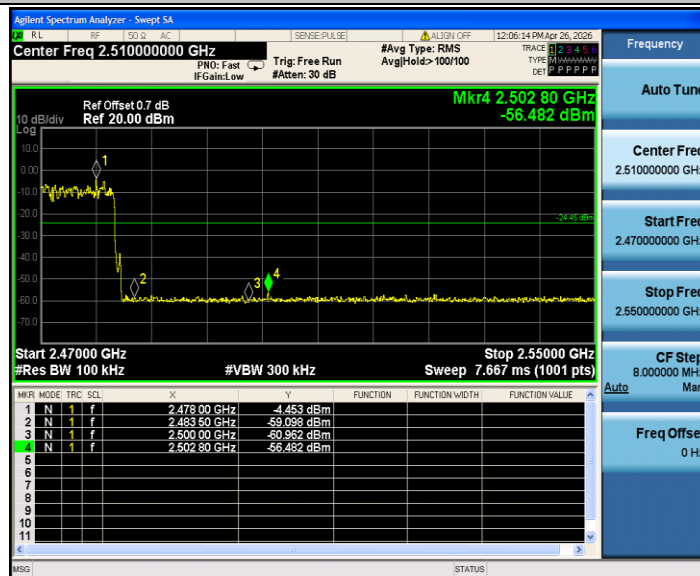



Appendix H: Conducted Spurious Emission

Test Result


TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	-4.40	-4.40	---	PASS
			30~1000	-4.40	-67.03	≤-24.4	PASS
			1000~26500	-4.40	-47.97	≤-24.4	PASS
		2441	Reference	-4.78	-4.78	---	PASS
			30~1000	-4.78	-66.84	≤-24.78	PASS
			1000~26500	-4.78	-49.6	≤-24.78	PASS
		2480	Reference	-4.06	-4.06	---	PASS
			30~1000	-4.06	-68.03	≤-24.06	PASS
			1000~26500	-4.06	-48.68	≤-24.06	PASS
2DH5	Ant1	2402	Reference	-3.85	-3.85	---	PASS
			30~1000	-3.85	-67.68	≤-23.85	PASS
			1000~26500	-3.85	-50.16	≤-23.85	PASS
		2441	Reference	-5.34	-5.34	---	PASS
			30~1000	-5.34	-66.54	≤-25.34	PASS
			1000~26500	-5.34	-51.25	≤-25.34	PASS
		2480	Reference	-4.87	-4.87	---	PASS
			30~1000	-4.87	-67.72	≤-24.87	PASS
			1000~26500	-4.87	-49.23	≤-24.87	PASS
3DH5	Ant1	2402	Reference	-3.61	-3.61	---	PASS
			30~1000	-3.61	-67.11	≤-23.61	PASS
			1000~26500	-3.61	-48.75	≤-23.61	PASS
		2441	Reference	-6.14	-6.14	---	PASS
			30~1000	-6.14	-66.94	≤-26.14	PASS
			1000~26500	-6.14	-50	≤-26.14	PASS
		2480	Reference	-5.52	-5.52	---	PASS
			30~1000	-5.52	-67.16	≤-25.52	PASS
			1000~26500	-5.52	-47.21	≤-25.52	PASS

Test Graphs

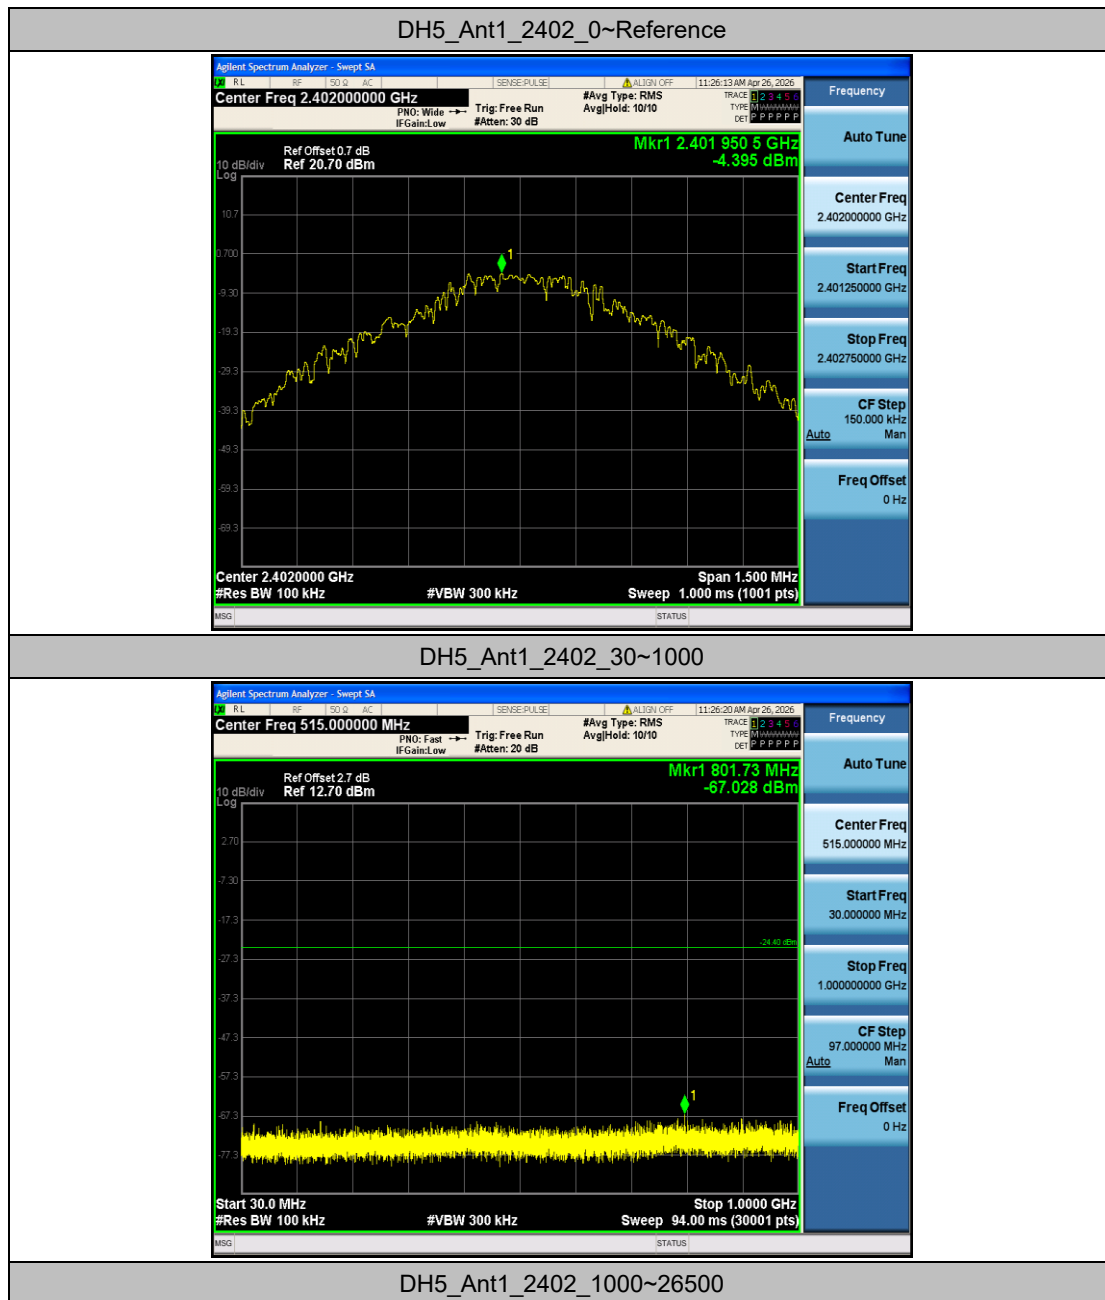


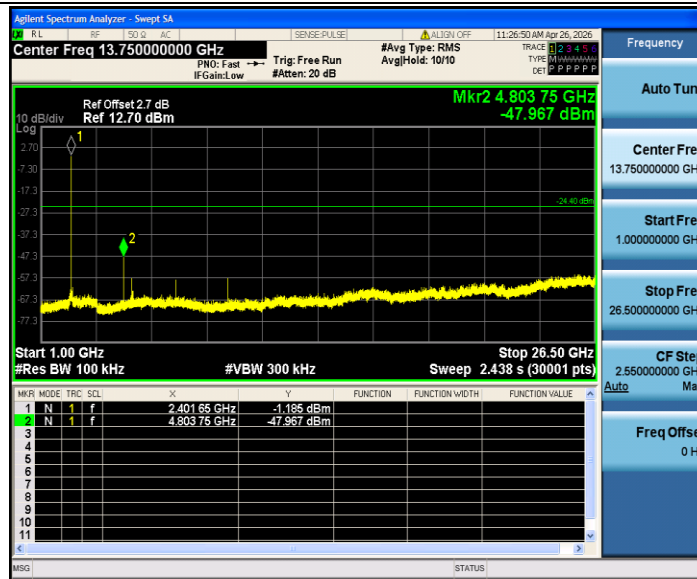


DH5_Ant1_2441_0~Reference

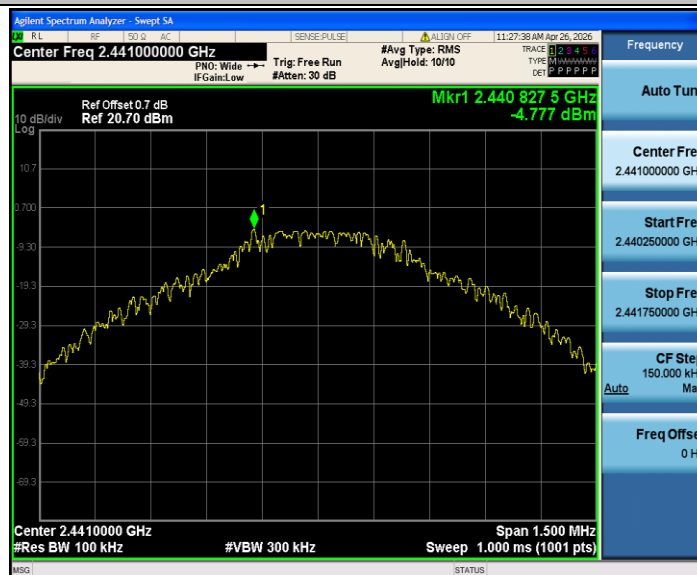

DH5_Ant1_2441_30~1000

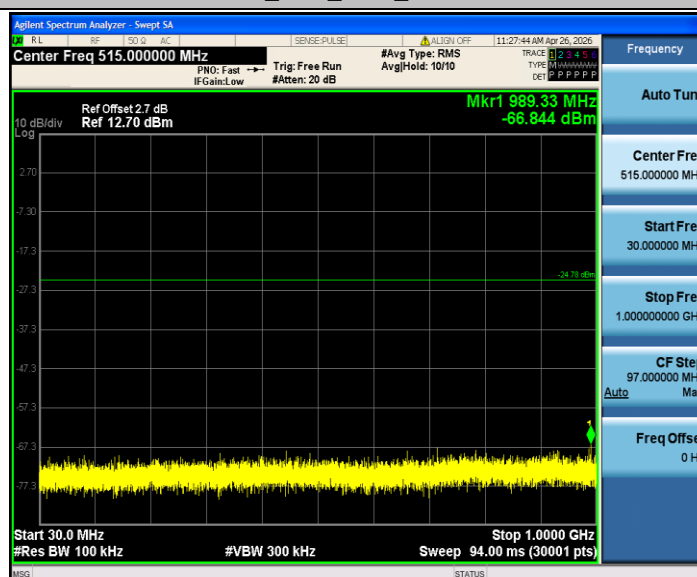


DH5_Ant1_2441_1000~26500

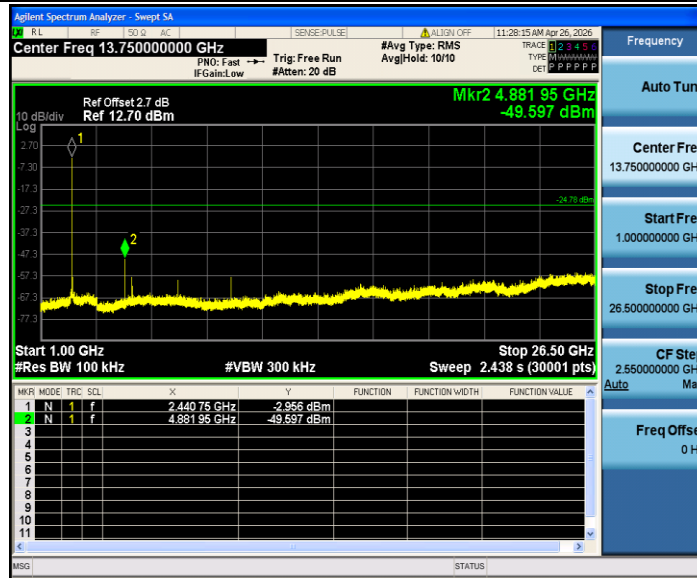


DH5_Ant1_2480_0~Reference




DH5_Ant1_2480_30~1000

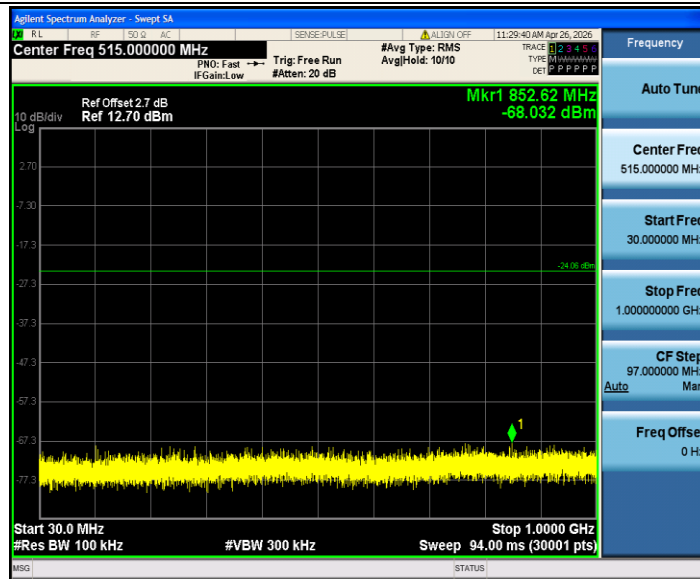


DH5_Ant1_2480_1000~26500

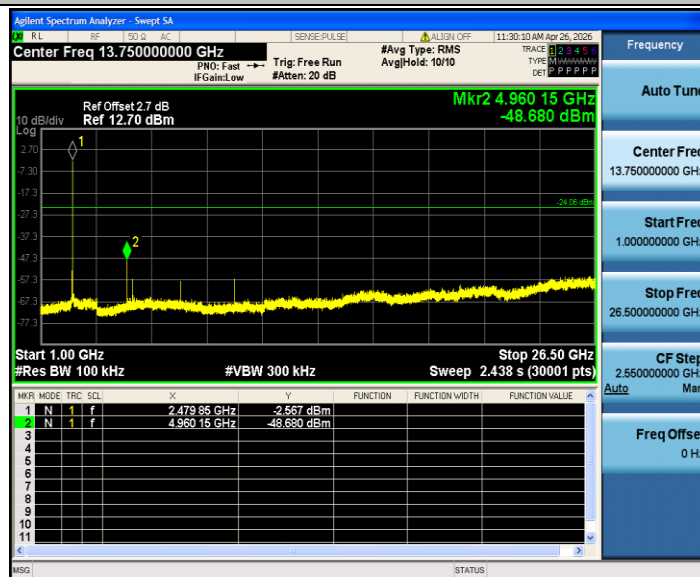


2DH5_Ant1_2402_0~Reference

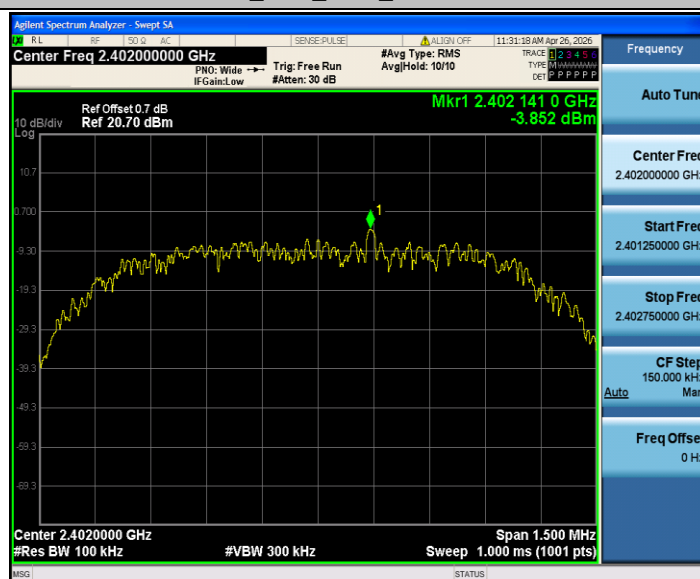

2DH5_Ant1_2402_30~1000

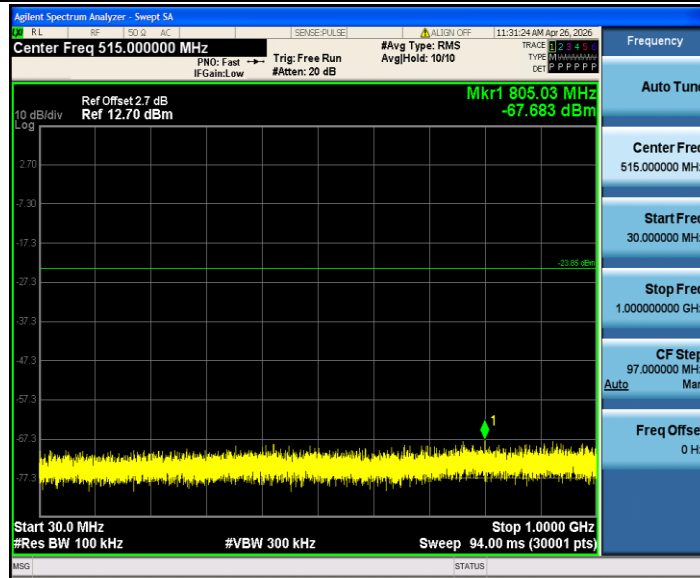

2DH5_Ant1_2402_1000~26500

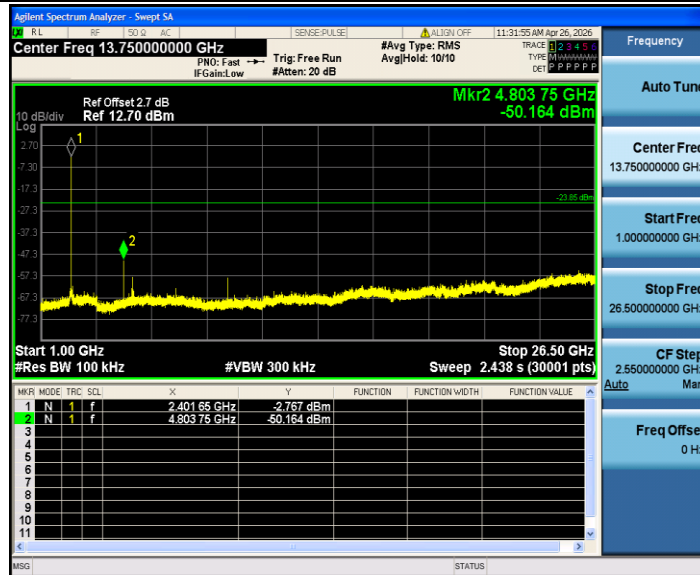

2DH5_Ant1_2441_0~Reference