



RADIO TEST REPORT

Applicant	:	LYSORA TECHNOLOGY INC.
Address of Applicant	:	8 THE GREEN, STE A, DOVER, KENT COUNTY, DELAWARE 19901, USA
Manufacturer	:	LYSORA TECHNOLOGY INC.
Address of Manufacturer	:	8 THE GREEN, STE A, DOVER, KENT COUNTY, DELAWARE 19901, USA
Equipment under Test	:	Wireless Bridge
Model No.	:	L2526
FCC ID	:	2BPSN-L2526
IC	:	34118-L2526
Test Standard(s)	:	47 CFR Part 15 Subpart E, ANSI C63.10-2020, 789033 D02 General U-NII Test Procedures New Rules v02r01, 662911 D01 Multiple Transmitter Output v02r01
Report No.	:	DDT-RE25092317-2E02
Issue Date	:	2026/01/08
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information.....	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT	9
2.3.	Block diagram of EUT configuration for test.....	9
2.4.	Decision of final test mode	9
2.5.	Deviations of test standard	11
2.6.	Test environment conditions	11
2.7.	Test laboratory	12
2.8.	Measurement uncertainty	12
3.	Equipment Used During Conductive Test	13
4.	26dB Bandwidth	14
4.1.	Block diagram of test setup	14
4.2.	Limits	14
4.3.	Test procedure	14
4.4.	Test result.....	15
4.5.	Test graphs	17
5.	6dB Bandwidth	57
5.1.	Block diagram of test setup	57
5.2.	Limits	57
5.3.	Test procedure	57
5.4.	Test result B4	58
5.5.	Test graphs B4	59
6.	99% Bandwidth	69
6.1.	Block diagram of test setup	69
6.2.	Limits	69
6.3.	Test procedure	69
6.4.	Test result.....	70
6.5.	Test graphs	72
7.	Duty Cycle	112
7.1.	Block diagram of test setup	112
7.2.	Limit.....	112
7.3.	Test procedure	112
7.4.	Test result.....	113
7.5.	Test graphs	116
8.	Maximum Output Power	156

8.1.	Block diagram of test setup	156
8.2.	Limits	156
8.3.	Test procedure	156
8.4.	Test result channel power	157
9.	Power Spectral Density	163
9.1.	Block diagram of test setup	163
9.2.	Limits	163
9.3.	Test procedure	163
9.4.	Test result.....	165
9.5.	Test graphs	168
10.	Frequency Stability Measurement.....	208
10.1.	Limit of Frequency Stability	208
10.2.	Measuring Instruments.....	208
10.3.	Test procedures	208
10.4.	Test setup.....	208
10.5.	Test result.....	209
11.	Antenna Requirements.....	237
11.1.	Limit.....	237
11.2.	Result	237
12.	Radiated Emission	238
12.1.	Test equipment.....	238
12.2.	Block diagram of test setup	239
12.3.	Limits	240
12.4.	Assistant equipment used for test	241
12.5.	Test procedure	241
12.6.	Test result.....	243
12.7.	Test data	244
13.	Band Edge Compliance.....	270
13.1.	Test equipment.....	270
13.2.	Block diagram of test setup	271
13.3.	Limits	271
13.4.	Assistant equipment used for test	271
13.5.	Test procedure	271
13.6.	Test result.....	272
13.7.	Test data	273
14.	Power Line Conducted Emissions.....	363
14.1.	Test equipment.....	363
14.2.	Block diagram of test setup	363

14.3.	Limits	363
14.4.	Assistant equipment used for test	363
14.5.	Test procedure	363
14.6.	Test result.....	364
14.7.	Test data	365
15.	Test Setup Photograph	367
16.	Photos of the EUT	370

Test Report Declare

Applicant	:	LYSORA TECHNOLOGY INC.
Address of Applicant	:	8 THE GREEN, STE A, DOVER, KENT COUNTY, DELAWARE 19901, USA
Equipment under Test	:	Wireless Bridge
Model No.	:	L2526
Manufacturer	:	LYSORA TECHNOLOGY INC.
Address of Manufacturer	:	8 THE GREEN, STE A, DOVER, KENT COUNTY, DELAWARE 19901, USA

Test Standard Used:

47 CFR Part 15 Subpart E,
ANSI C63.10-2020,
789033 D02 General U-NII Test Procedures New Rules v02r01,
662911 D01 Multiple Transmitter Output v02r01

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE25092317-2E02		
Date of Receipt:	2025/10/16	Date of Test:	2025/10/16 – 2026/01/05

Created: Tiger Mo	Reviewed: Johnson Huang	Approved: Ella Gong
		
2026/01/05	2026/01/08	2026/01/08

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2026/01/08	Ella Gong

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	6/26db Bandwidth and 99% Bandwidth	47 CFR Part 15 15.407 (e)	/	Pass
2	Output Power	47 CFR Part 15 15.407 (a)	/	Pass
3	Power Spectral Density	47 CFR Part 15 15.407 (a)	/	Pass
4	Frequency Stability Measurement	47 CFR Part 15 15.407 (g)	/	Pass
5	Radiated Emission	47 CFR Part 15 15.407 (b), 47 CFR Part 15 15.209, 47 CFR Part 15 15.205	/	Pass
6	Band Edge Compliance	47 CFR Part 15 15.407 (b), 47 CFR Part 15 15.209, 47 CFR Part 15 15.205	/	Pass
7	Antenna Requirement	47 CFR Part 15.203	/	Pass
8	Power Line Conducted Emissions	47 CFR Part 15 15.207(a)	/	Pass
9	Dynamic Frequency Selection	47 CFR Part 15 15.407 (h)	/	Pass
Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.				

2. General Test Information

2.1. Description of EUT

EUT Name	: Wireless Bridge
Model Number	: L2526
Difference of model number	: /
EUT Function Description	: Please reference user manual of this device
Power Supply	: PoE Input 24V, 0.5A
Antenna Type	: Directional Antenna
Max Antenna Gain(dBi)	: Ant1:19.26 dBi, Ant2:18.66dBi

Radio Technology	: IEEE 802.11a/n/ac
Operation frequency	: U-NII-1: 5180 MHz to 5240 MHz U-NII-2A: 5260 MHz to 5320 MHz U-NII-2C: 5500 MHz to 5700 MHz U-NII-3: 5745 MHz to 5825 MHz
Modulation	: IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)

Channel information							
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE802.11ac (VHT40)		IEEE 802.11ac (VHT80)		/	
UNII-1							
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	/	/
36	5180	38	5190	42	5210	/	/
40	5200	46	5230	/	/	/	/
44	5220	/	/	/	/	/	/
48	5240	/	/	/	/	/	/
UNII-2A							
52	5260	54	5270	58	5290	/	/
56	5280	62	5310	/	/	/	/
60	5300	/	/	/	/	/	/
64	5320	/	/	/	/	/	/
UNII-2C							
100	5500	102	5510	106	5530	/	/
104	5520	110	5550	122	5610	/	/
108	5540	118	5590	138	/	/	/
112	5560	126	5630	/	/	/	/
116	5580	134	5670	/	/	/	/
120	5600	142	/	/	/	/	/
124	5620	/	/	/	/	/	/

128	5640	/	/	/	/	/	/
132	5660	/	/	/	/	/	/
136	5680	/	/	/	/	/	/
140	5700	/	/	/	/	/	/
UNII-3							
149	5745	151	5755	155	5775	/	/
153	5765	159	5795	/	/	/	/
157	5785	/	/	/	/	/	/
161	5805	/	/	/	/	/	/
165	5825	/	/	/	/	/	/

Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
POE Switching Power Supply	RISUNIC Technology (ShenZhen) Co., Ltd.	RP023-2400500ZG	Input: AC 100-240V, 50/60Hz 0.5A Max. output: DC 24.0V/0.5A 12.0W +(4,5) pins, -(7,8) pins
Power cable	/	/	/

2.3. Block diagram of EUT configuration for test



2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: QATool Dbg.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 2 dB (According to the manufacturer's claims)

Tested mode, Tx Power Setting, Data rate, Channel, and Frequency					
Tested mode	Tx Power Setting		Data rate (Mbps) (see Note)	Test Channel	Frequency (MHz)
	ANT1	ANT2			
IEEE 802.11a	08	08	6	LCH: CH36	5180
	08	08	6	MCH: CH40	5200
	08	08	6	HCH: CH48	5240
	08	08	6	LCH: CH52	5260
	08	08	6	MCH: CH56	5280
	08	08	6	HCH: CH64	5320
	08	08	6	LCH: CH100	5500
	08	08	6	MCH: CH116	5580
	08	08	6	HCH: CH140	5700
	0E	0D	6	LCH: CH149	5745
	0E	0D	6	MCH: CH157	5785
	0E	0D	6	HCH: CH165	5825
IEEE 802.11n HT20	00	00	MCS 8	LCH: CH36	5180
	00	00	MCS 8	MCH: CH40	5200
	00	00	MCS 8	HCH: CH48	5240
	00	00	MCS 8	LCH: CH52	5260
	00	00	MCS 8	MCH: CH56	5280
	00	00	MCS 8	HCH: CH64	5320
	00	00	MCS 8	LCH: CH100	5500
	00	00	MCS 8	MCH: CH116	5580
	00	00	MCS 8	HCH: CH140	5700
	08	08	MCS 8	LCH: CH149	5745
	08	08	MCS 8	MCH: CH157	5785
	07	07	MCS 8	HCH: CH165	5825
IEEE 802.11n HT40	00	00	MCS 8	LCH: CH38	5190
	00	00	MCS 8	HCH: CH46	5230
	-4	-4	MCS 8	LCH: CH54	5270
	-4	-4	MCS 8	HCH: CH62	5310
	-4	-4	MCS 8	LCH: CH102	5510
	-4	-4	MCS 8	MCH: CH110	5550
	-4	-4	MCS 8	HCH: CH134	5670
	06	06	MCS 8	LCH: CH151	5755
	06	06	MCS 8	HCH: CH159	5795
IEEE 802.11ac VHT20	00	00	MCS 0	LCH: CH36	5180
	00	00	MCS 0	MCH: CH40	5200

	00	00	MCS 0	HCH: CH48	5240
	00	00	MCS 0	LCH: CH52	5260
	00	00	MCS 0	MCH: CH56	5280
	00	00	MCS 0	HCH: CH64	5320
	00	00	MCS 0	LCH: CH100	5500
	00	00	MCS 0	MCH: CH116	5580
	00	00	MCS 0	HCH: CH140	5700
	07	07	MCS 0	LCH: CH149	5745
	07	07	MCS 0	MCH: CH157	5785
	07	07	MCS 0	HCH: CH165	5825
IEEE 802.11 ac VHT40	00	00	MCS 0	LCH: CH38	5190
	00	00	MCS 0	HCH: CH46	5230
	-4	-4	MCS 0	LCH: CH54	5270
	-4	-4	MCS 0	HCH: CH62	5310
	-4	-4	MCS 0	LCH: CH102	5510
	-4	-4	MCS 0	MCH: CH110	5550
	-4	-4	MCS 0	HCH: CH134	5670
	07	07	MCS 0	LCH: CH159	5755
	07	07	MCS 0	HCH: CH36	5795
IEEE 802.11ac VHT80	00	00	MCS 0	CH42	5210
	-4	-4	MCS 0	CH58	5290
	-4	-4	MCS 0	LCH: CH106	5530
	-4	-4	MCS 0	HCH: CH122	5610
	09	09	MCS 0	CH155	5775
Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.					

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method)
	5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
	1.66 dB ($8 \text{ GHz} \leq f < 26.5 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test	3.44 dB
(9 kHz – 30 MHz)	
Uncertainty for Radiation Emission test	4.70 dB (Antenna Polarize: V)
(30 MHz - 1 GHz)	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
	3.34dB (150KHz-30MHz)
Uncertainty for Power line conduction emission test	3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☒ RF Connected Test (RF Measurement System 1#)				
SIGNAL ANALYZER	R&S	FSQ26	101272	2026/03/28
Wideband Radio Communication Tester	R&S	CMW500	120259	2026/03/28
MXG Vector Signal Generator	KEYSIGHT	N5182B	MY59100192	2026/03/28
MXG Vector Signal Generator	Agilent	N5182A	MY19060405	2026/03/28
RF Control Unit	Tonscend	JS0806-2	158060010	2026/03/28
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2026/03/28
Test Software	Tonscend	JS1120-3	V3.6.21	N/A

4. 26dB Bandwidth

4.1. Block diagram of test setup

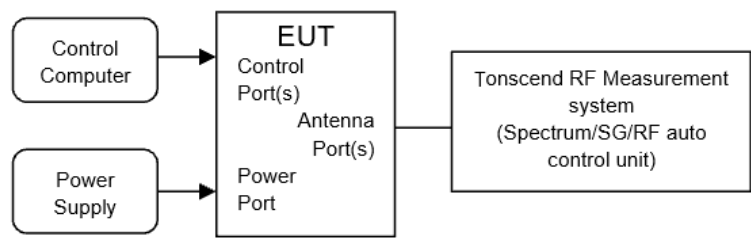

4.2. Limits

FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
26 dB Bandwidth	---	5150 - 5250
	---	5250 - 5350
	---	5470 - 5725
	Just for report	5725-5850

4.3. Test procedure

Connect EUT's antenna output to spectrum analyzer by RF cable.

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	approximately 1% of the emission bandwidth.
VBW	> RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.


4.4. Test result


Test Engineer:	Wayne Huang	Test Site:	RF Measurement System 1#
Ambient Condition:	24.9℃,46.1%RH	Test Date:	2025.12.01-2025.12.17
Test Power Supply:	PoE Input 24V,0.5A	Sample Number:	S25092317-001


Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	20.16	5169.84	5190.00	---	---
	Ant2	5180	19.92	5170.04	5189.96	---	---
	Ant1	5200	20.20	5189.96	5210.16	---	---
	Ant2	5200	20.04	5189.96	5210.00	---	---
	Ant1	5240	20.20	5229.92	5250.12	---	---
	Ant2	5240	20.04	5229.96	5250.00	---	---
	Ant1	5260	20.28	5249.88	5270.16	---	---
	Ant2	5260	20.12	5249.96	5270.08	---	---
	Ant1	5280	20.16	5269.88	5290.04	---	---
	Ant2	5280	19.96	5270.00	5289.96	---	---
	Ant1	5320	20.40	5309.76	5330.16	---	---
	Ant2	5320	20.00	5309.92	5329.92	---	---
	Ant1	5500	20.28	5489.84	5510.12	---	---
	Ant2	5500	20.16	5489.96	5510.12	---	---
	Ant1	5580	20.40	5569.88	5590.28	---	---
	Ant2	5580	20.04	5569.96	5590.00	---	---
	Ant1	5700	20.60	5689.56	5710.16	---	---
	Ant2	5700	19.96	5689.96	5709.92	---	---
	Ant1	5745	20.16	5734.92	5755.08	---	---
	Ant2	5745	20.00	5735.00	5755.00	---	---
	Ant1	5785	20.16	5774.88	5795.04	---	---
	Ant2	5785	20.08	5774.92	5795.00	---	---
	Ant1	5825	20.08	5814.96	5835.04	---	---
	Ant2	5825	20.08	5815.00	5835.08	---	---
11N20MIMO	Ant1	5180	22.68	5167.64	5190.32	---	---
	Ant2	5180	20.32	5169.80	5190.12	---	---
	Ant1	5200	21.40	5189.64	5211.04	---	---
	Ant2	5200	20.28	5189.80	5210.08	---	---
	Ant1	5240	20.32	5229.76	5250.08	---	---
	Ant2	5240	20.40	5229.76	5250.16	---	---
	Ant1	5260	20.40	5249.76	5270.16	---	---
	Ant2	5260	20.08	5249.92	5270.00	---	---
	Ant1	5280	20.40	5269.76	5290.16	---	---
	Ant2	5280	20.16	5269.96	5290.12	---	---
	Ant1	5320	20.36	5309.80	5330.16	---	---
	Ant2	5320	20.08	5309.96	5330.04	---	---
	Ant1	5500	20.36	5489.80	5510.16	---	---
	Ant2	5500	20.16	5489.88	5510.04	---	---
	Ant1	5580	20.48	5569.76	5590.24	---	---
	Ant2	5580	20.12	5569.88	5590.00	---	---
	Ant1	5700	20.44	5689.72	5710.16	---	---
	Ant2	5700	20.24	5689.80	5710.04	---	---
	Ant1	5745	20.28	5734.84	5755.12	---	---
	Ant2	5745	20.24	5734.84	5755.08	---	---
	Ant1	5785	20.36	5774.76	5795.12	---	---
	Ant2	5785	20.24	5774.84	5795.08	---	---
	Ant1	5825	20.40	5814.76	5835.16	---	---
	Ant2	5825	20.16	5814.88	5835.04	---	---
11N40MIMO	Ant1	5190	40.40	5169.84	5210.24	---	---
	Ant2	5190	40.40	5169.92	5210.32	---	---
	Ant1	5230	40.72	5209.52	5250.24	---	---
	Ant2	5230	40.48	5209.84	5250.32	---	---
	Ant1	5270	40.72	5249.68	5290.40	---	---
	Ant2	5270	40.48	5249.84	5290.32	---	---
	Ant1	5310	41.04	5289.36	5330.40	---	---

11AC20MIM O	Ant2	5310	40.48	5289.76	5330.24	---	---
	Ant1	5510	41.12	5489.36	5530.48	---	---
	Ant2	5510	40.72	5489.68	5530.40	---	---
	Ant1	5550	40.72	5529.60	5570.32	---	---
	Ant2	5550	40.24	5529.92	5570.16	---	---
	Ant1	5670	40.80	5649.52	5690.32	---	---
	Ant2	5670	40.48	5649.68	5690.16	---	---
	Ant1	5755	41.20	5734.44	5775.64	---	---
	Ant2	5755	40.40	5734.84	5775.24	---	---
	Ant1	5795	40.72	5774.60	5815.32	---	---
	Ant2	5795	40.40	5774.76	5815.16	---	---
	Ant1	5180	20.04	5169.92	5189.96	---	---
	Ant2	5180	20.20	5169.88	5190.08	---	---
	Ant1	5200	20.40	5189.76	5210.16	---	---
	Ant2	5200	20.32	5189.84	5210.16	---	---
	Ant1	5240	20.48	5229.72	5250.20	---	---
	Ant2	5240	20.24	5229.88	5250.12	---	---
	Ant1	5260	20.48	5249.76	5270.24	---	---
	Ant2	5260	20.12	5249.92	5270.04	---	---
	Ant1	5280	20.44	5269.76	5290.20	---	---
11AC40MIM O	Ant2	5280	20.24	5269.88	5290.12	---	---
	Ant1	5320	20.32	5309.80	5330.12	---	---
	Ant2	5320	20.24	5309.84	5330.08	---	---
	Ant1	5500	20.40	5489.76	5510.16	---	---
	Ant2	5500	20.20	5489.88	5510.08	---	---
	Ant1	5580	20.32	5569.80	5590.12	---	---
	Ant2	5580	20.20	5569.84	5590.04	---	---
	Ant1	5700	20.36	5689.84	5710.20	---	---
	Ant2	5700	20.16	5689.84	5710.00	---	---
	Ant1	5745	20.32	5734.84	5755.16	---	---
	Ant2	5745	20.28	5734.84	5755.12	---	---
	Ant1	5785	20.32	5774.80	5795.12	---	---
	Ant2	5785	20.28	5774.88	5795.16	---	---
	Ant1	5825	20.52	5814.68	5835.20	---	---
	Ant2	5825	20.32	5814.76	5835.08	---	---
	Ant1	5190	40.88	5169.60	5210.48	---	---
	Ant2	5190	40.72	5169.68	5210.40	---	---
	Ant1	5230	40.96	5209.44	5250.40	---	---
	Ant2	5230	40.72	5209.76	5250.48	---	---
	Ant1	5270	40.88	5249.44	5290.32	---	---
11AC80MIM O	Ant2	5270	40.32	5249.84	5290.16	---	---
	Ant1	5310	40.56	5289.60	5330.16	---	---
	Ant2	5310	40.32	5289.84	5330.16	---	---
	Ant1	5510	41.04	5489.36	5530.40	---	---
	Ant2	5510	40.40	5489.76	5530.16	---	---
	Ant1	5550	41.04	5529.52	5570.56	---	---
	Ant2	5550	40.00	5530.08	5570.08	---	---
	Ant1	5670	40.80	5649.44	5690.24	---	---
	Ant2	5670	40.40	5649.68	5690.08	---	---
	Ant1	5755	40.72	5734.84	5775.56	---	---
	Ant2	5755	40.16	5734.92	5775.08	---	---
	Ant1	5795	40.80	5774.68	5815.48	---	---
	Ant2	5795	40.40	5774.76	5815.16	---	---
	Ant1	5210	81.28	5169.36	5250.64	---	---
	Ant2	5210	80.80	5169.52	5250.32	---	---
	Ant1	5290	80.96	5249.68	5330.64	---	---
	Ant2	5290	81.12	5249.52	5330.64	---	---
	Ant1	5530	81.44	5489.36	5570.80	---	---
	Ant2	5530	80.96	5489.52	5570.48	---	---
	Ant1	5610	81.44	5569.20	5650.64	---	---
	Ant2	5610	81.12	5569.36	5650.48	---	---
	Ant1	5775	81.44	5734.20	5815.64	---	---
	Ant2	5775	80.48	5734.84	5815.32	---	---


4.5. Test graphs

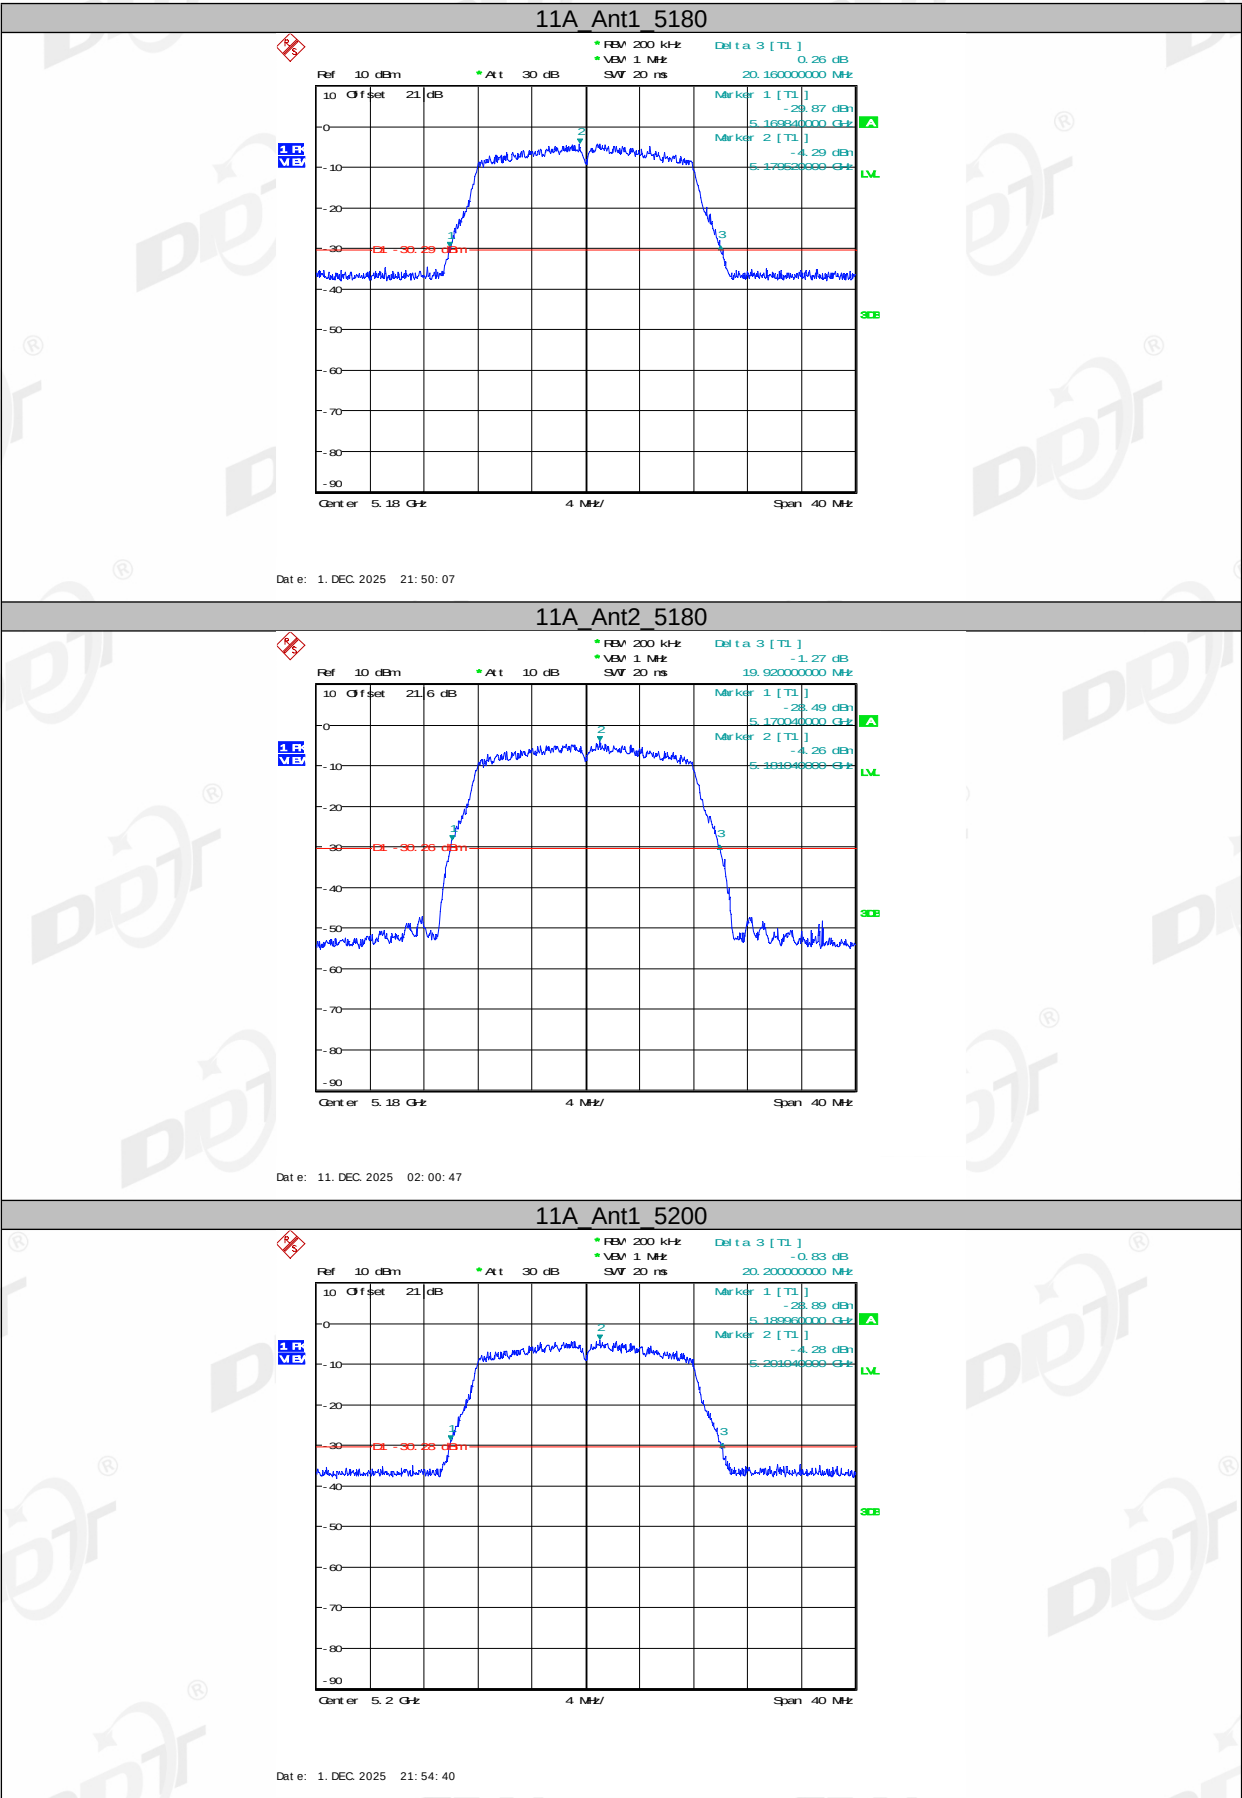

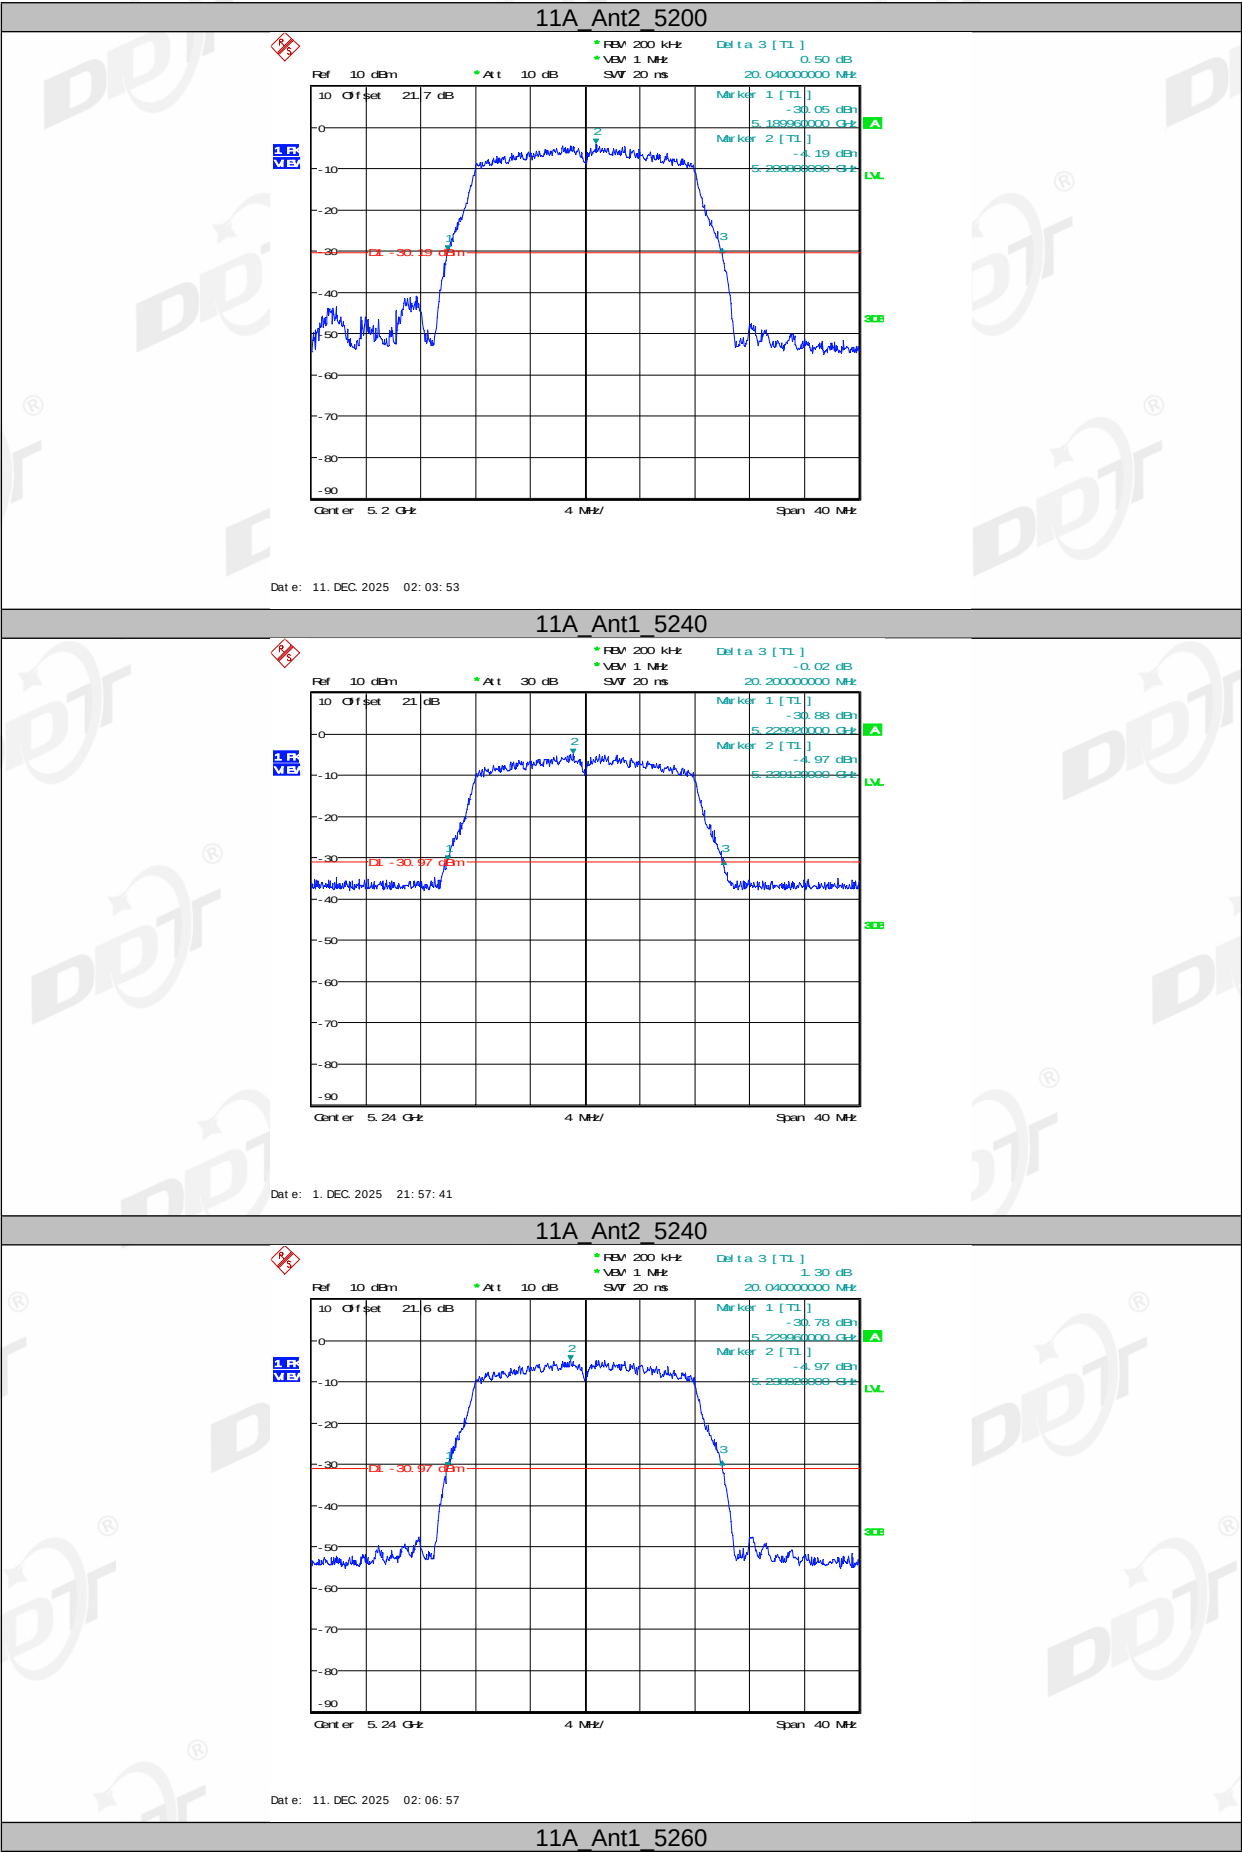


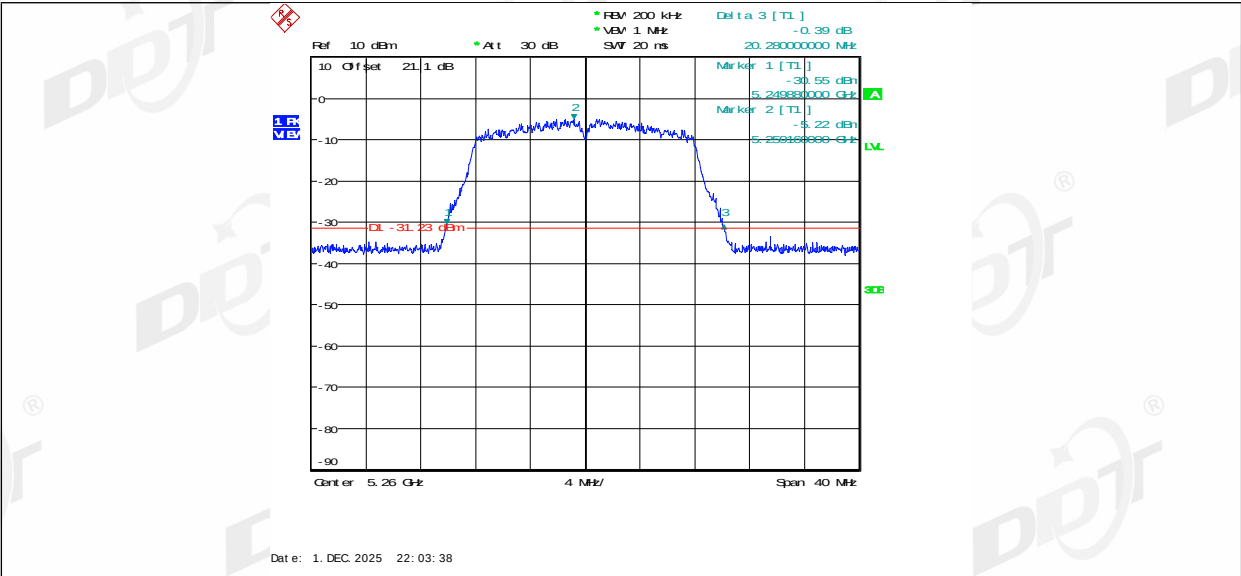


11A_Ant2_5260

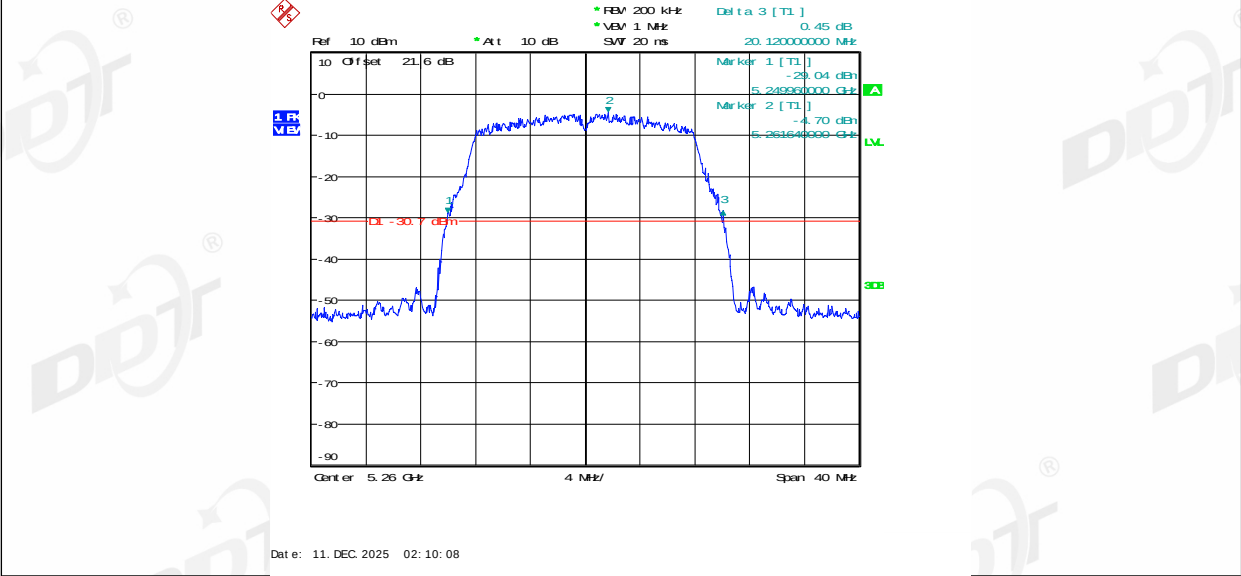


11A_Ant1_5280

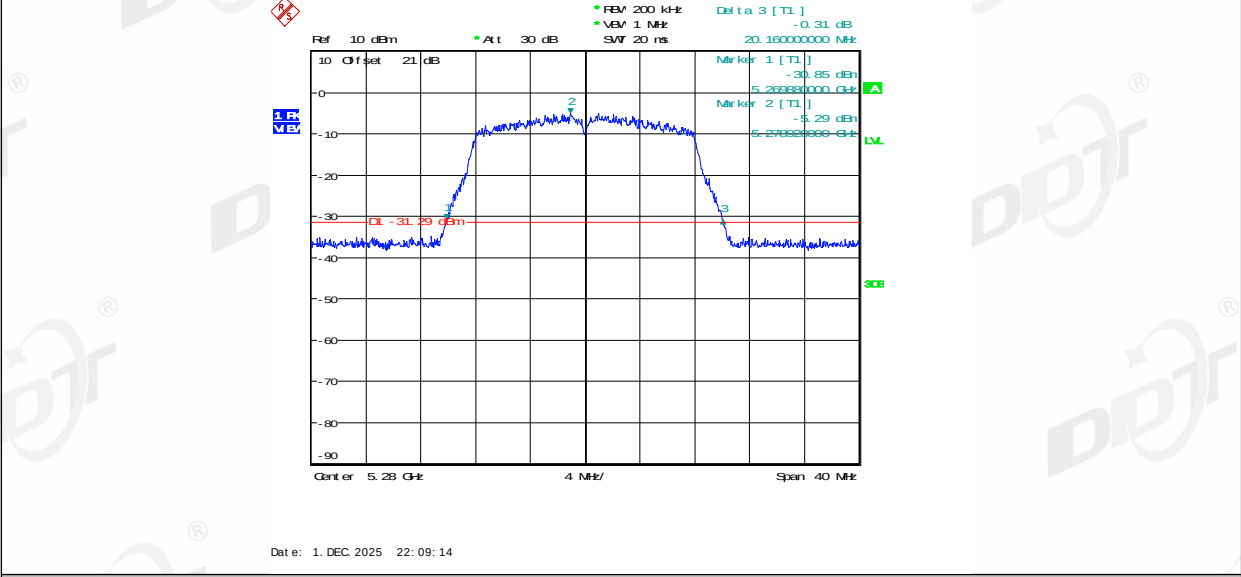


11A_Ant2_5280

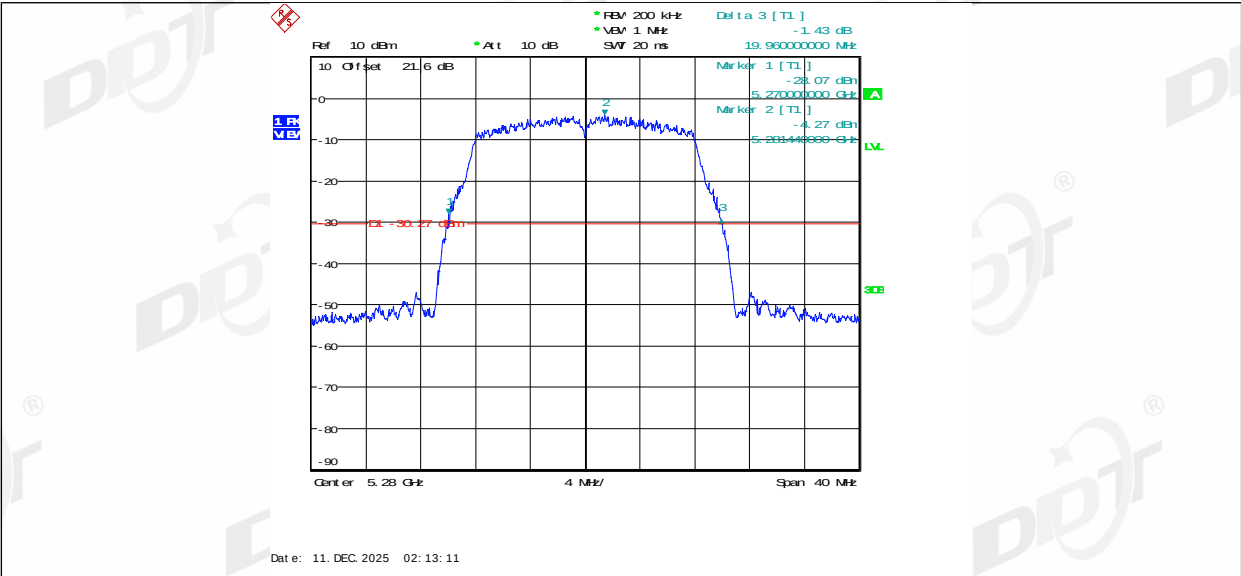


11A_Ant1_5320

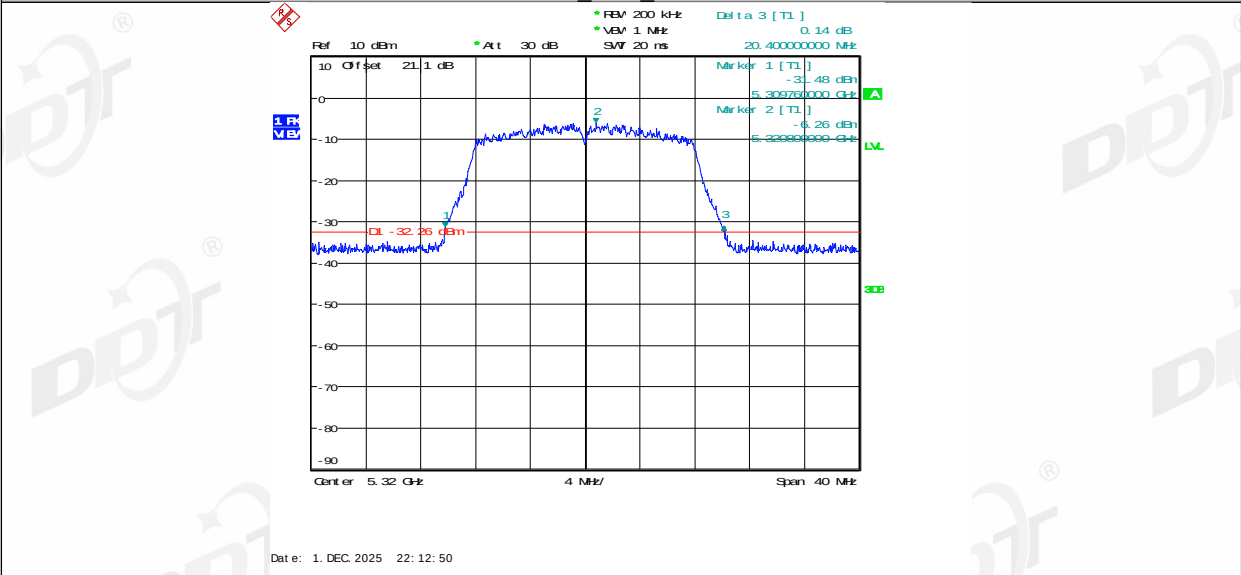


11A_Ant2_5320

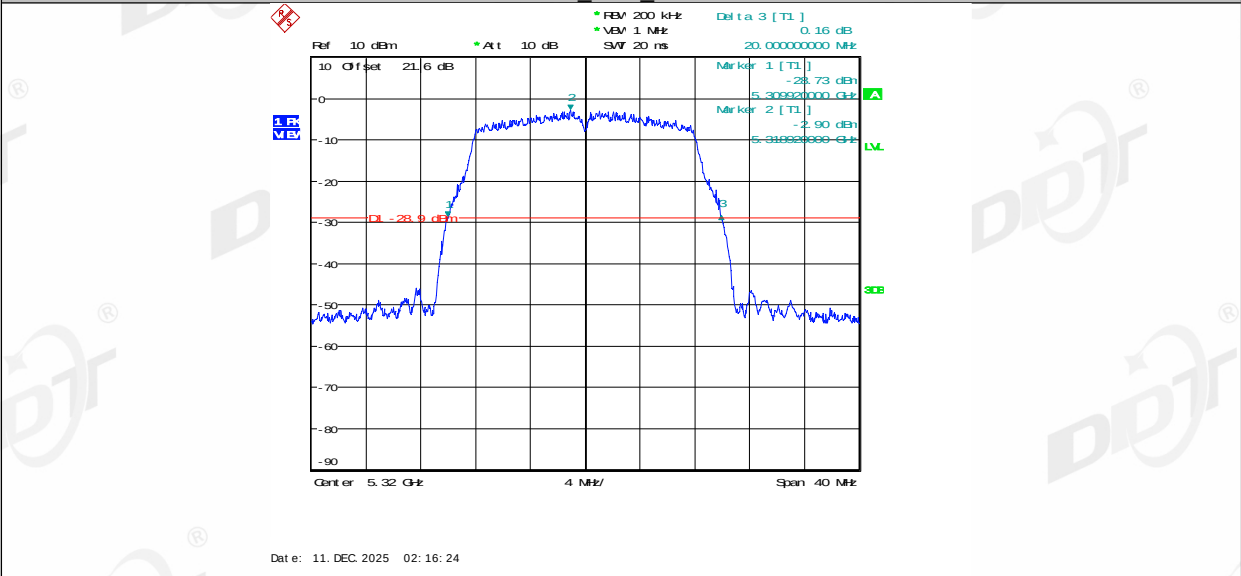


11A_Ant1_5500

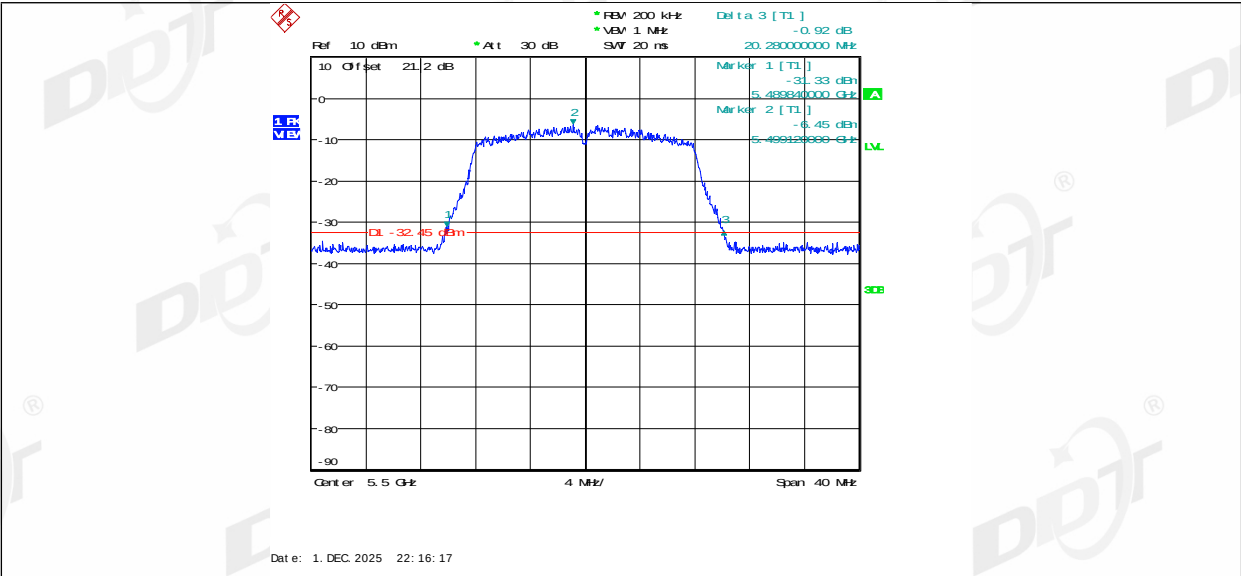


11A_Ant2_5500

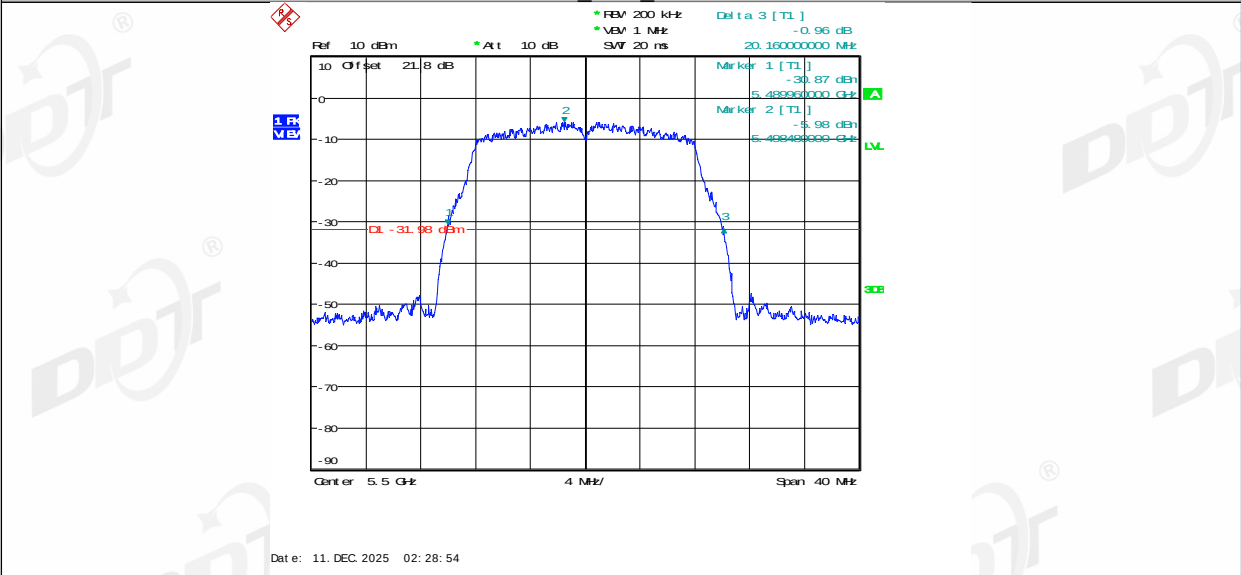


11A_Ant1_5580

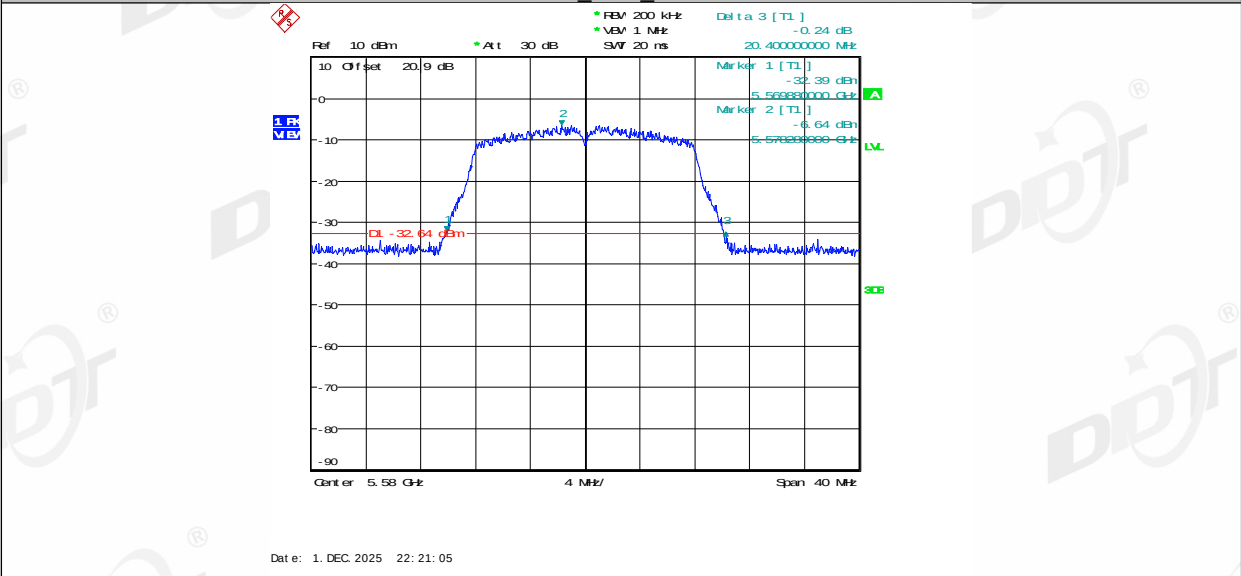


11A_Ant2_5580

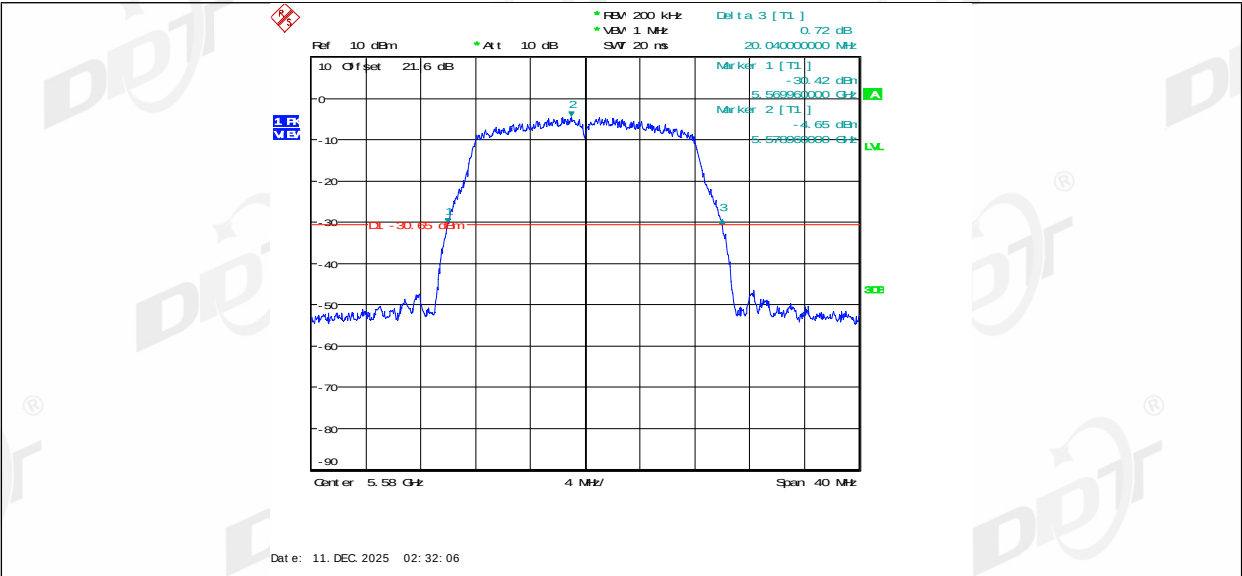


11A_Ant1_5700

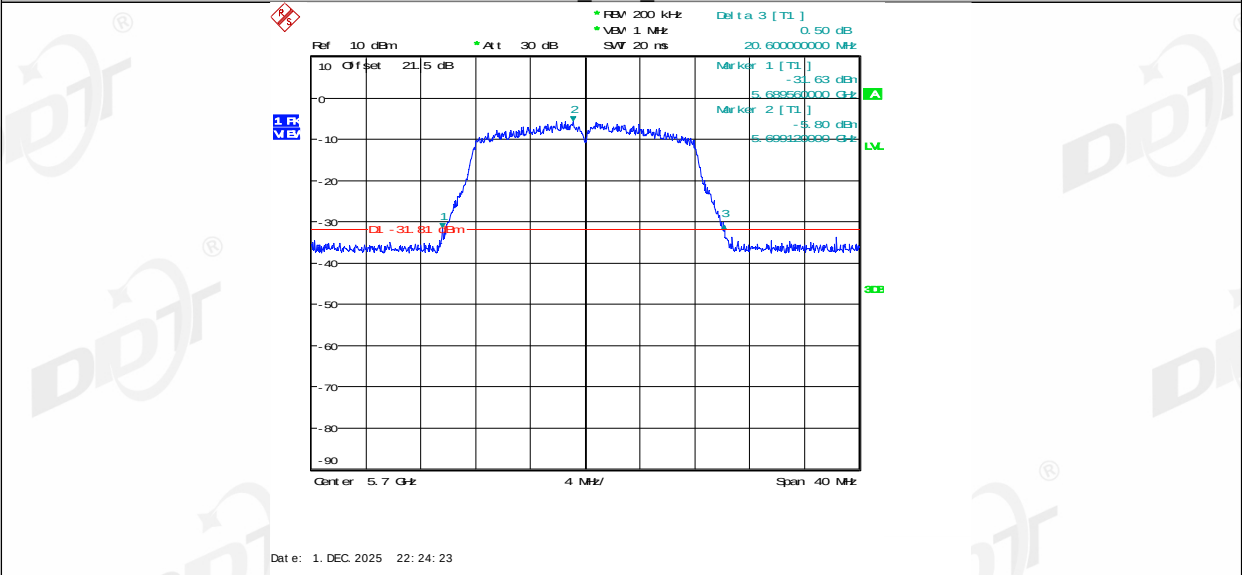


11A_Ant2_5700

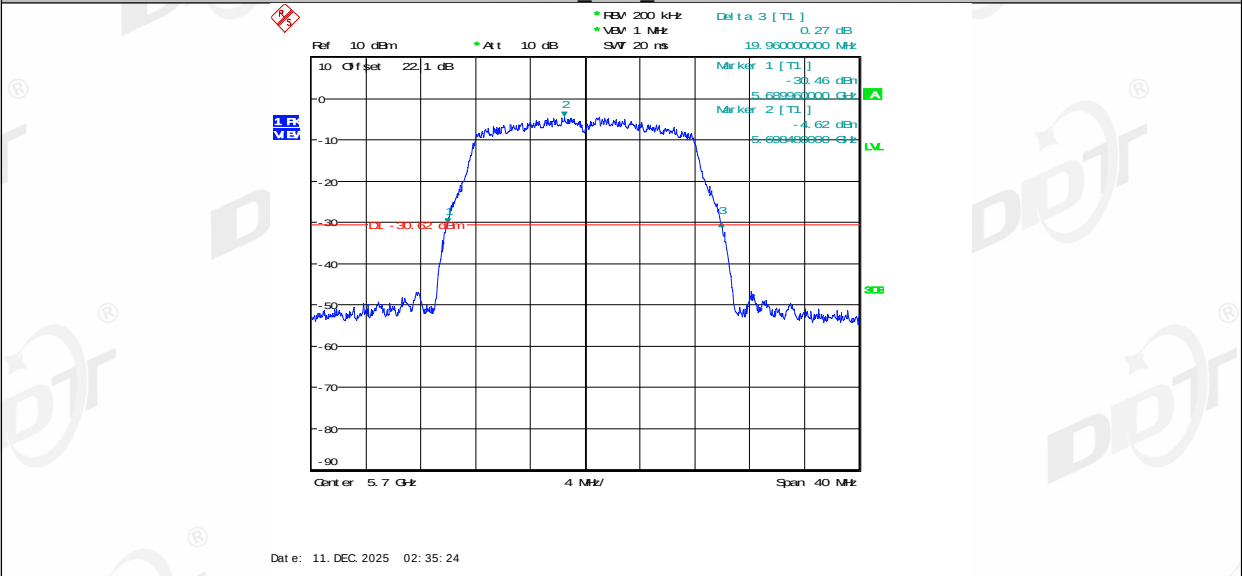


11A_Ant1_5745

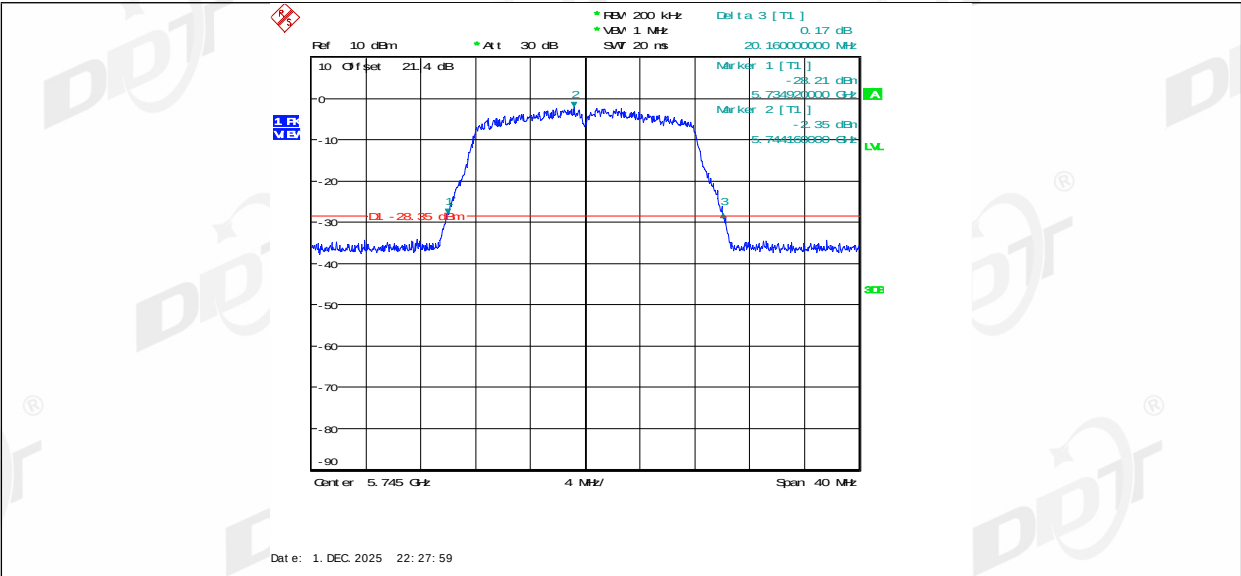


11A_Ant2_5745

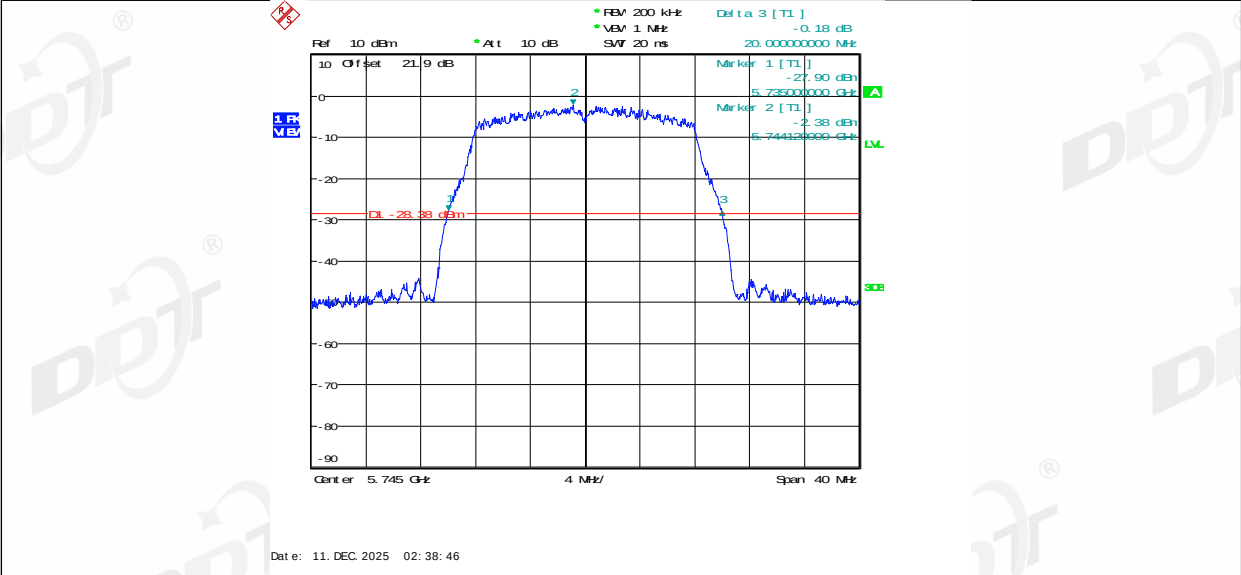


11A_Ant1_5785

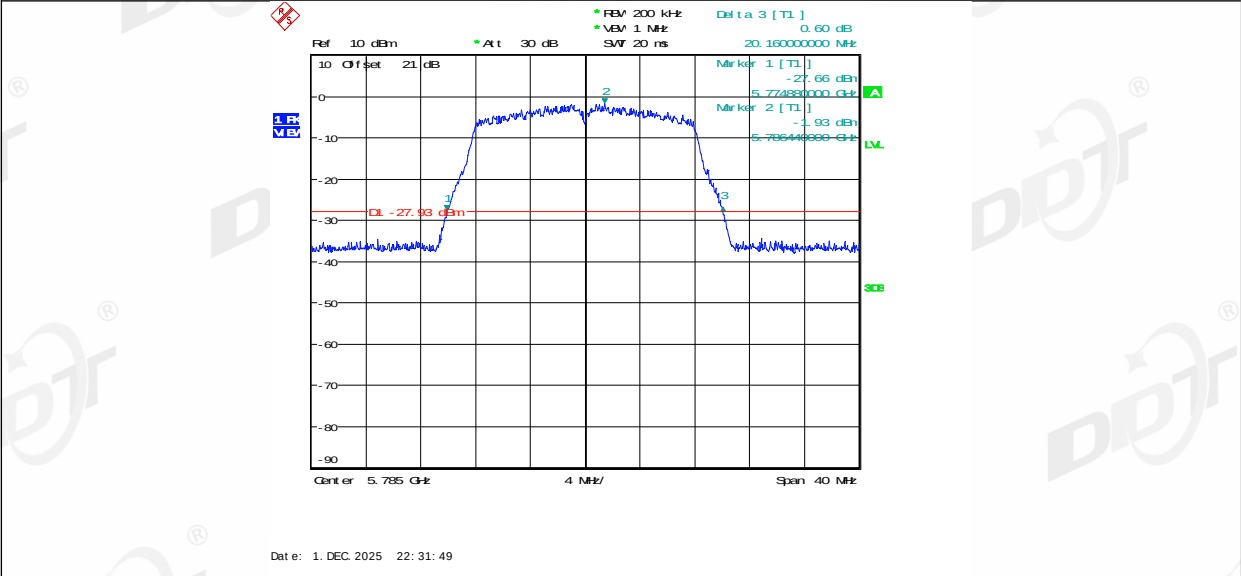


11A_Ant2_5785

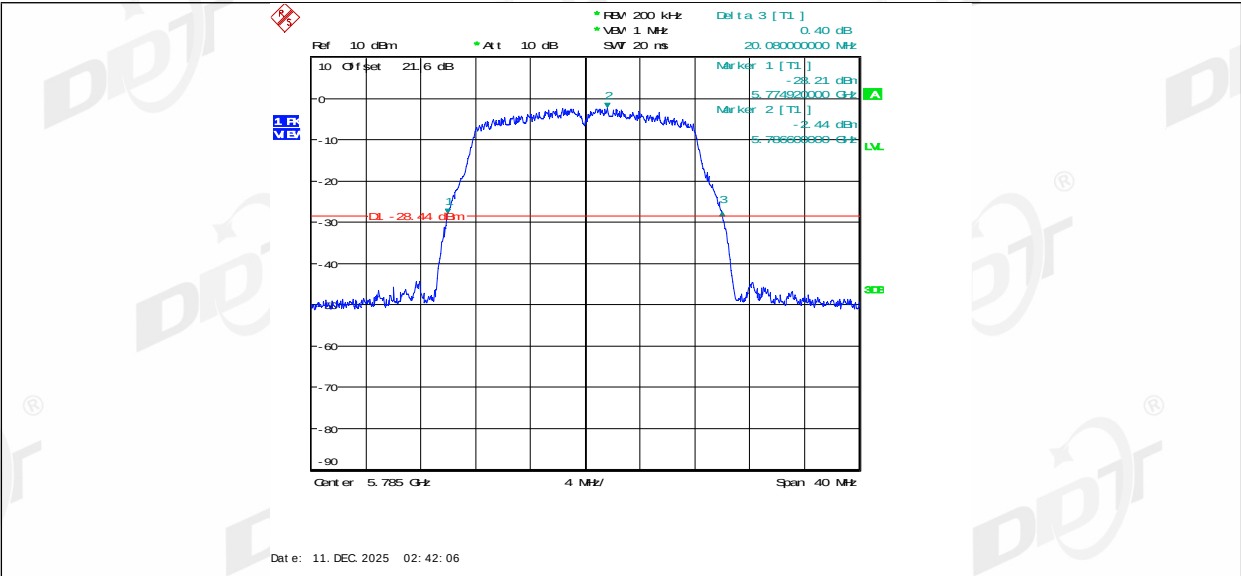


11A_Ant1_5825

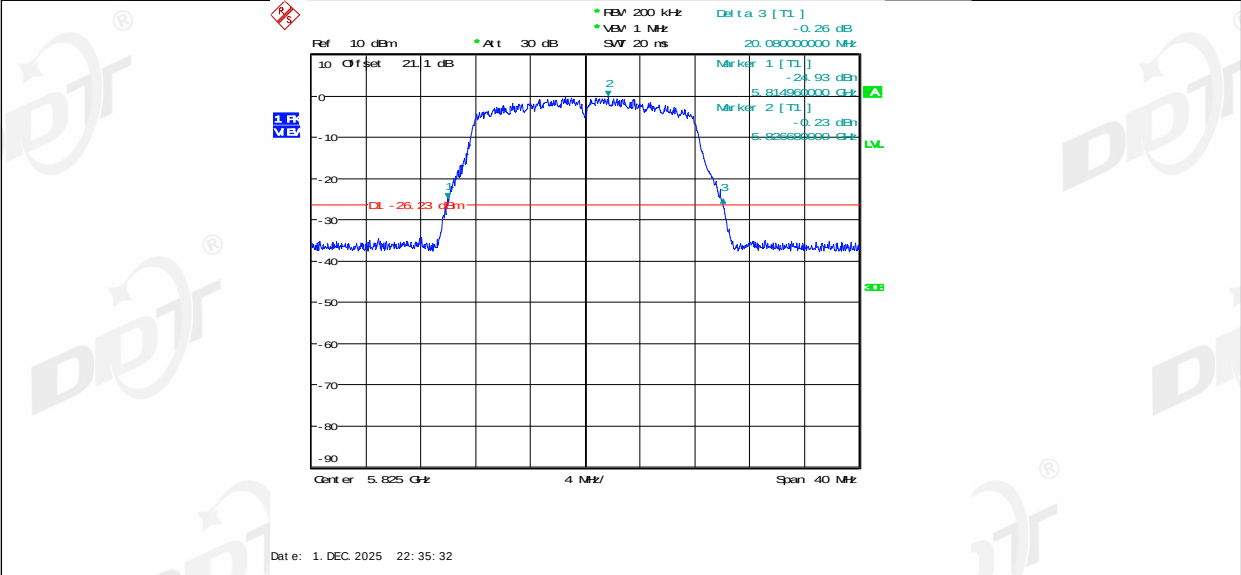


11A_Ant2_5825

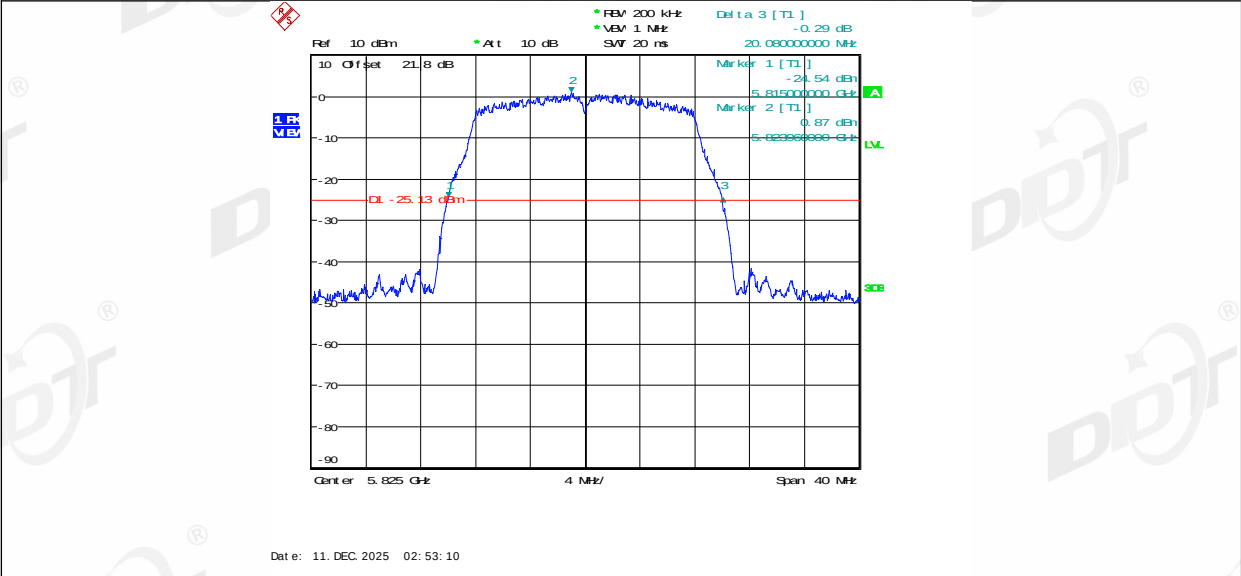


11N20MIMO_Ant1_5180

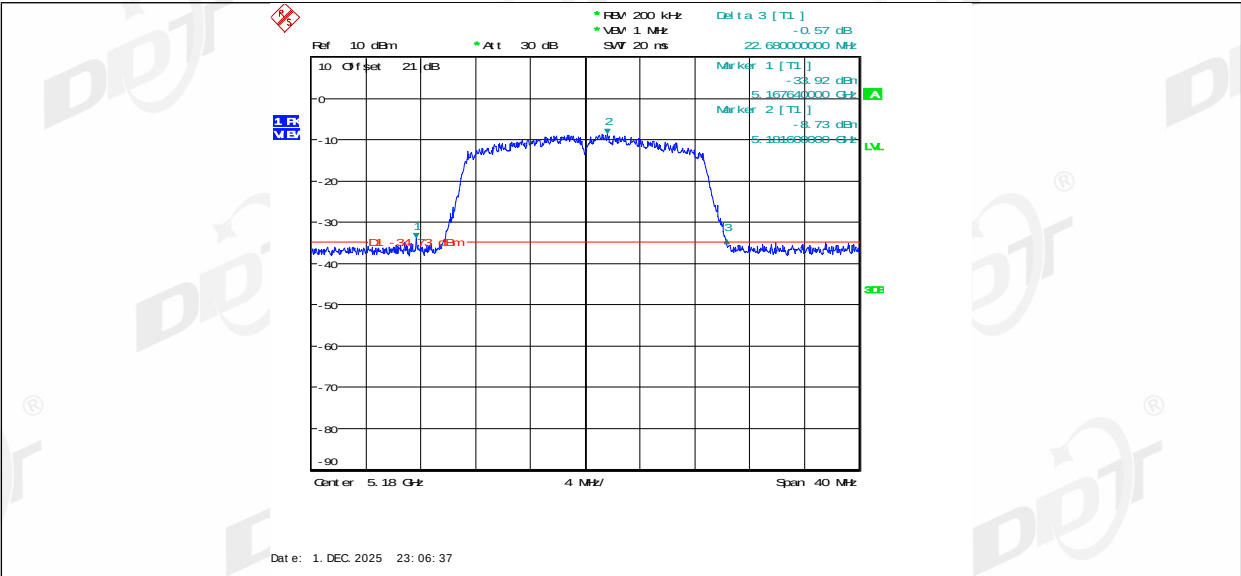


11N20MIMO_Ant2_5180

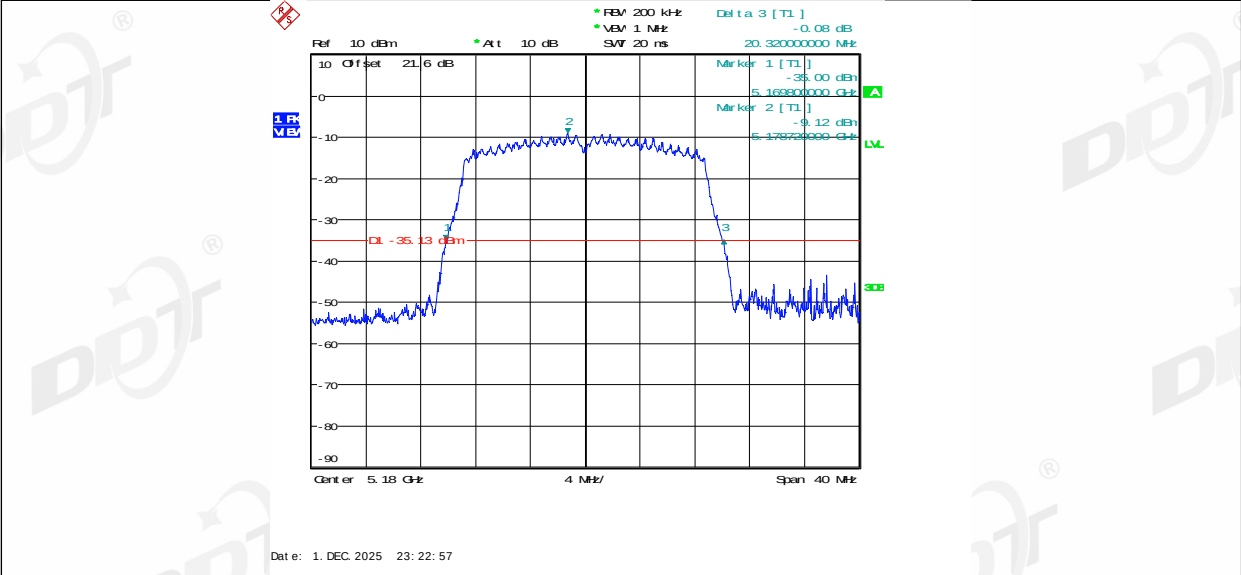


11N20MIMO_Ant1_5200

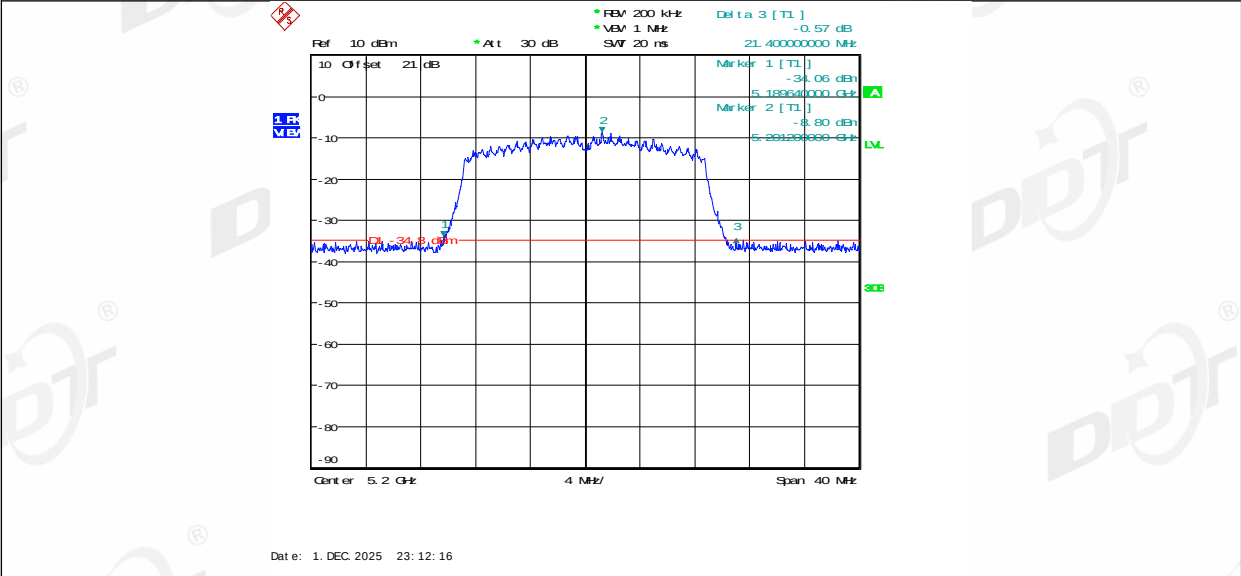


11N20MIMO_Ant2_5200

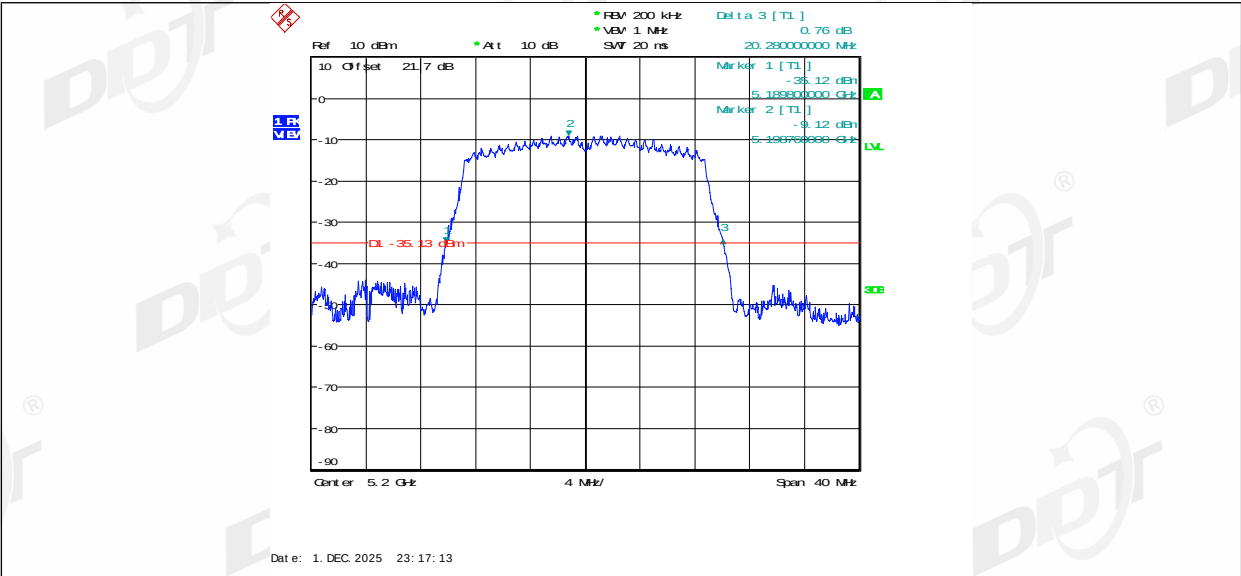


11N20MIMO_Ant1_5240

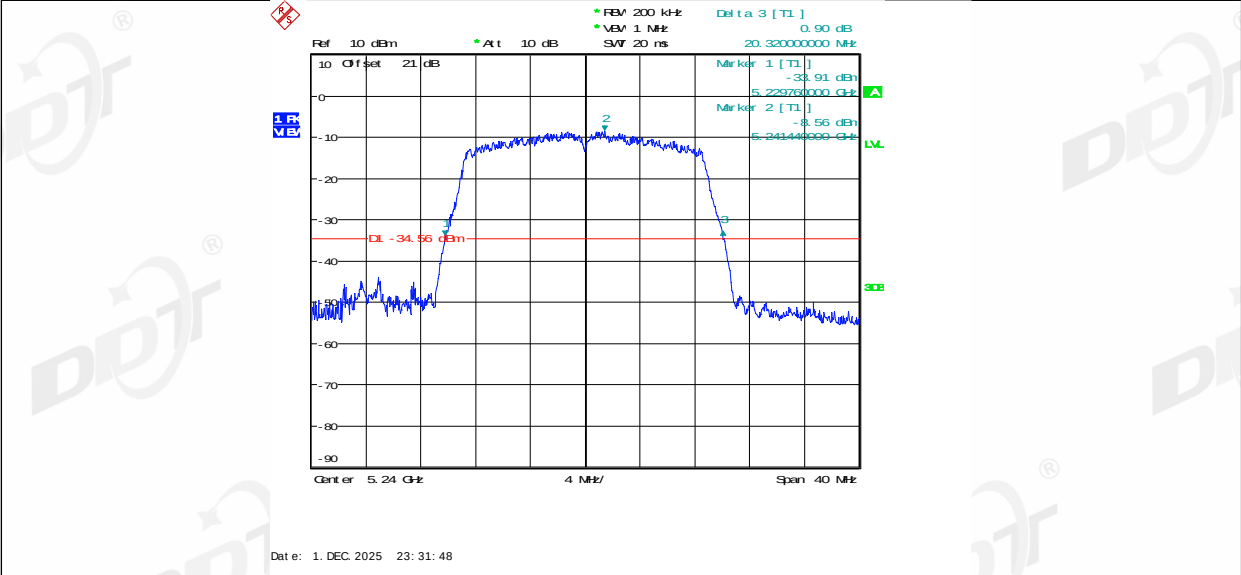


11N20MIMO_Ant2_5240

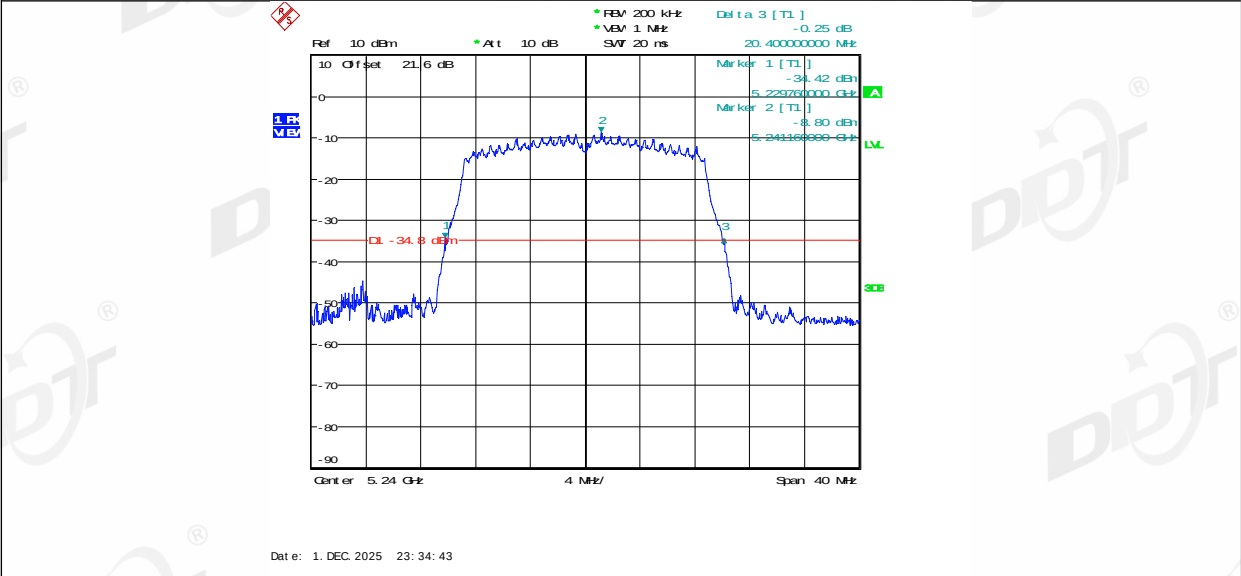


11N20MIMO_Ant1_5260

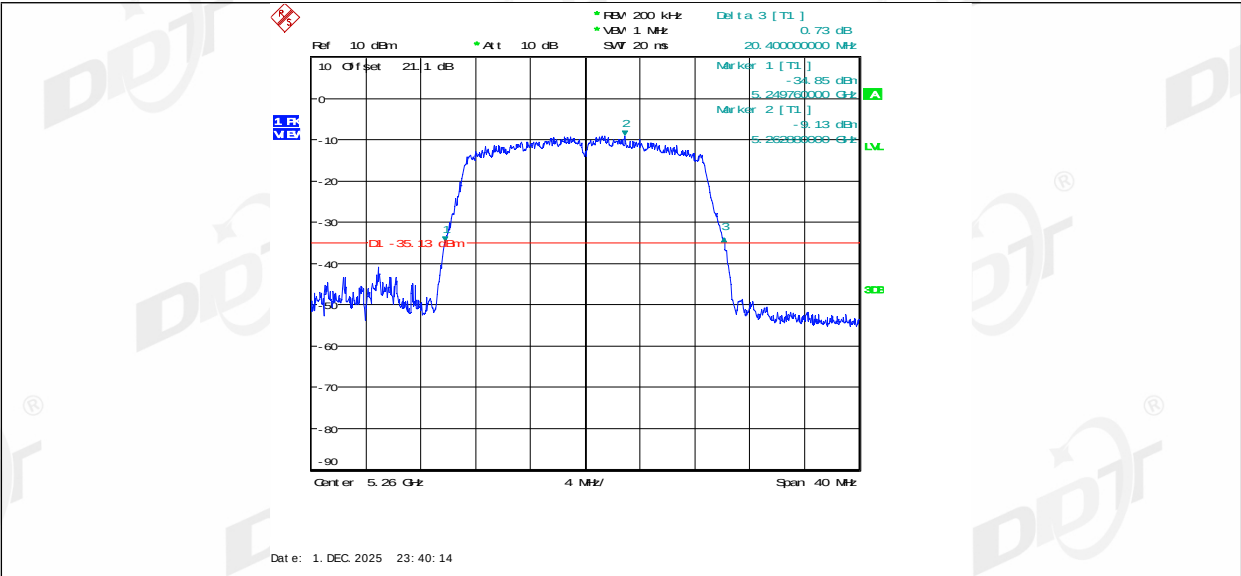


11N20MIMO_Ant2_5260

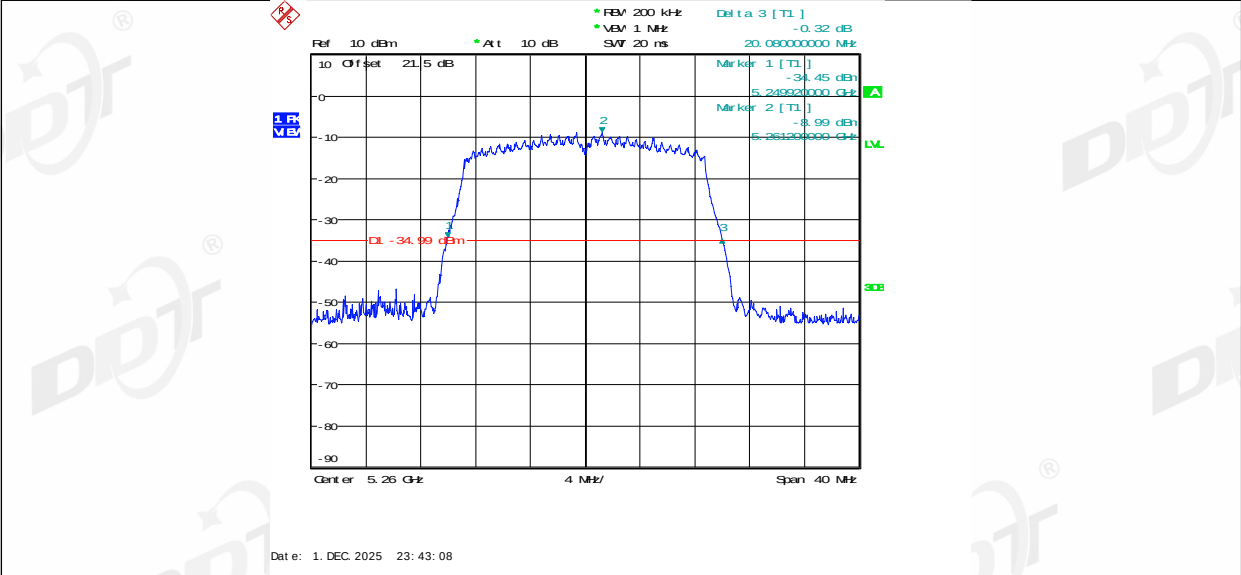


11N20MIMO_Ant1_5280

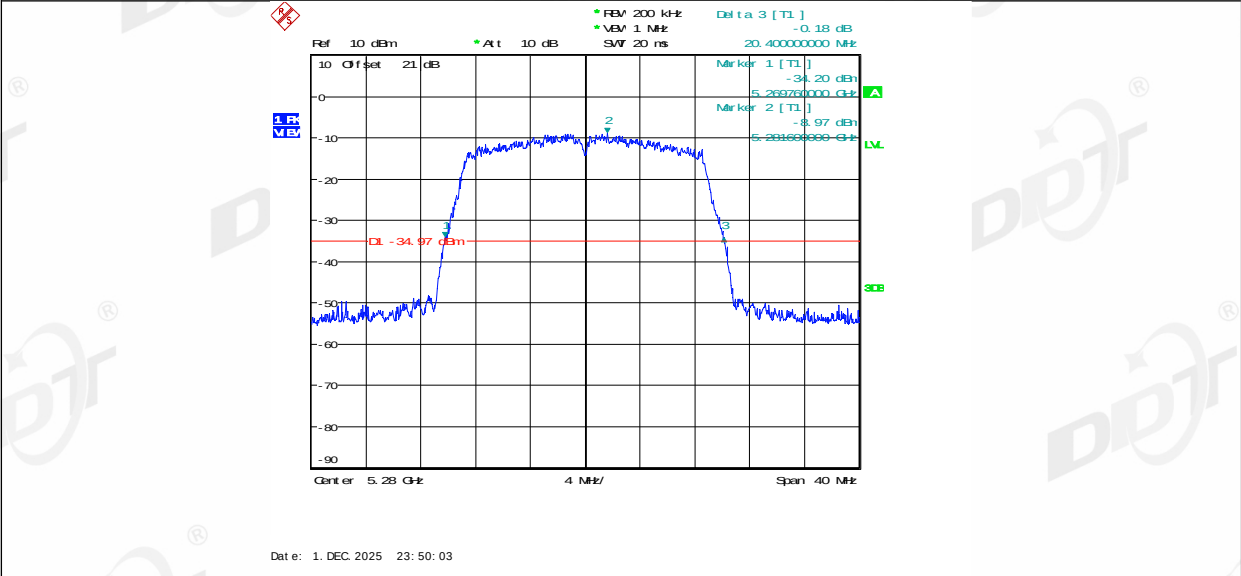


11N20MIMO_Ant2_5280

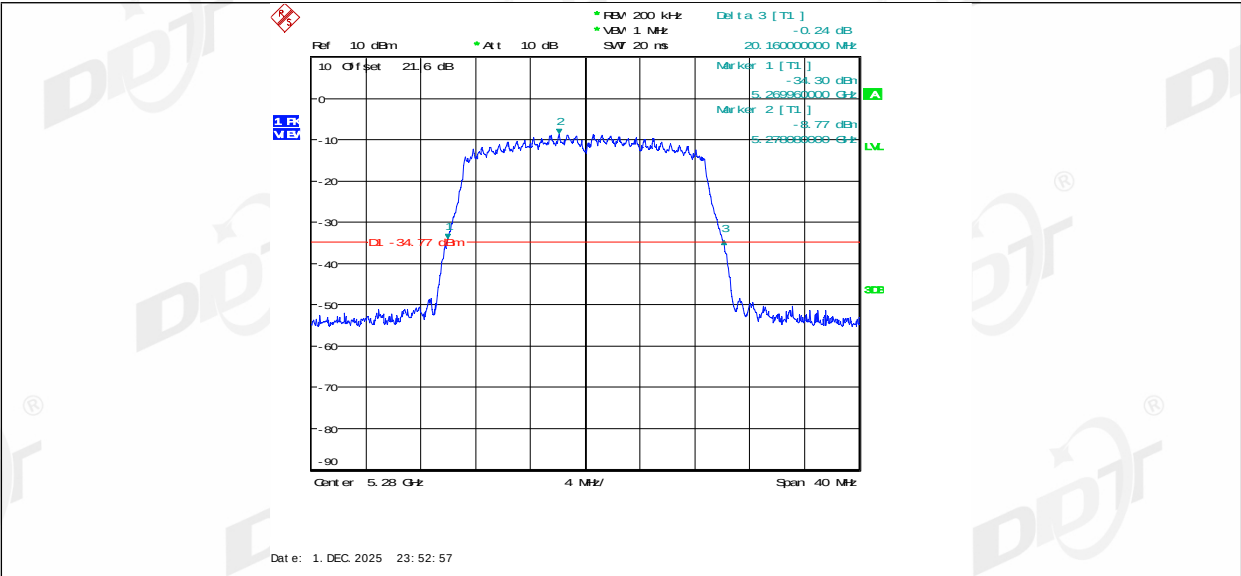




11N20MIMO_Ant1_5320

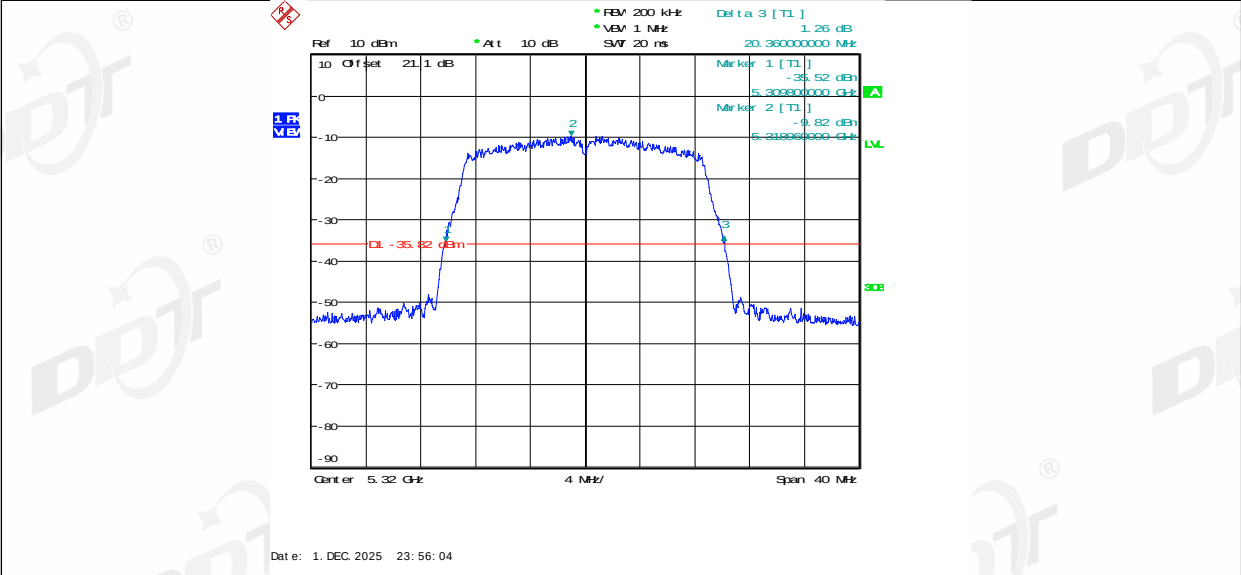


11N20MIMO_Ant2_5320

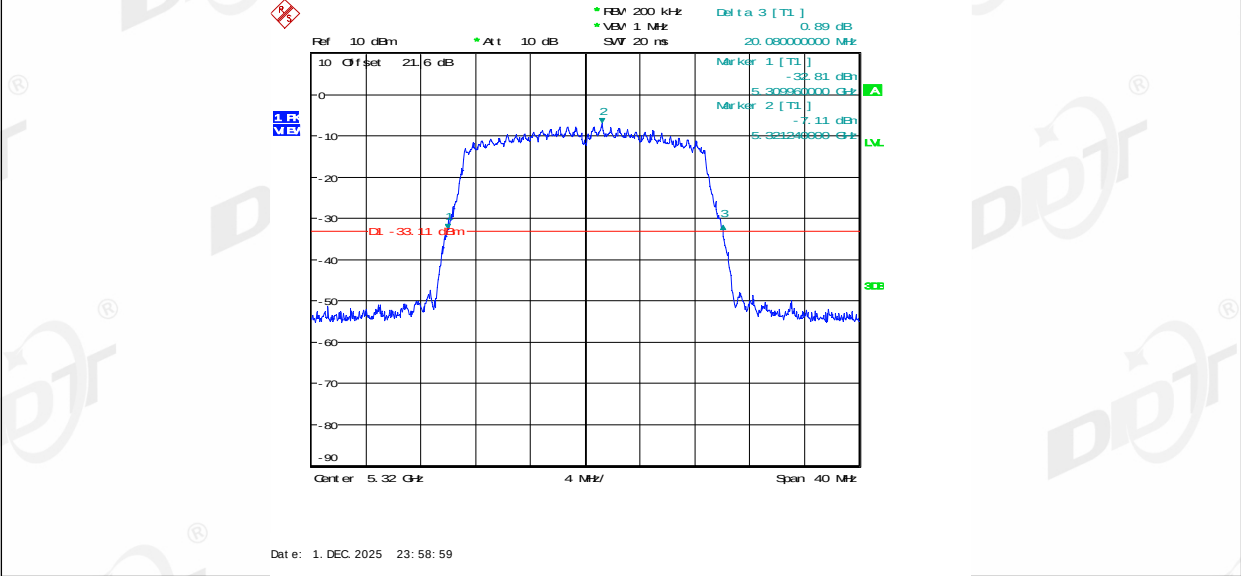


11N20MIMO_Ant1_5500

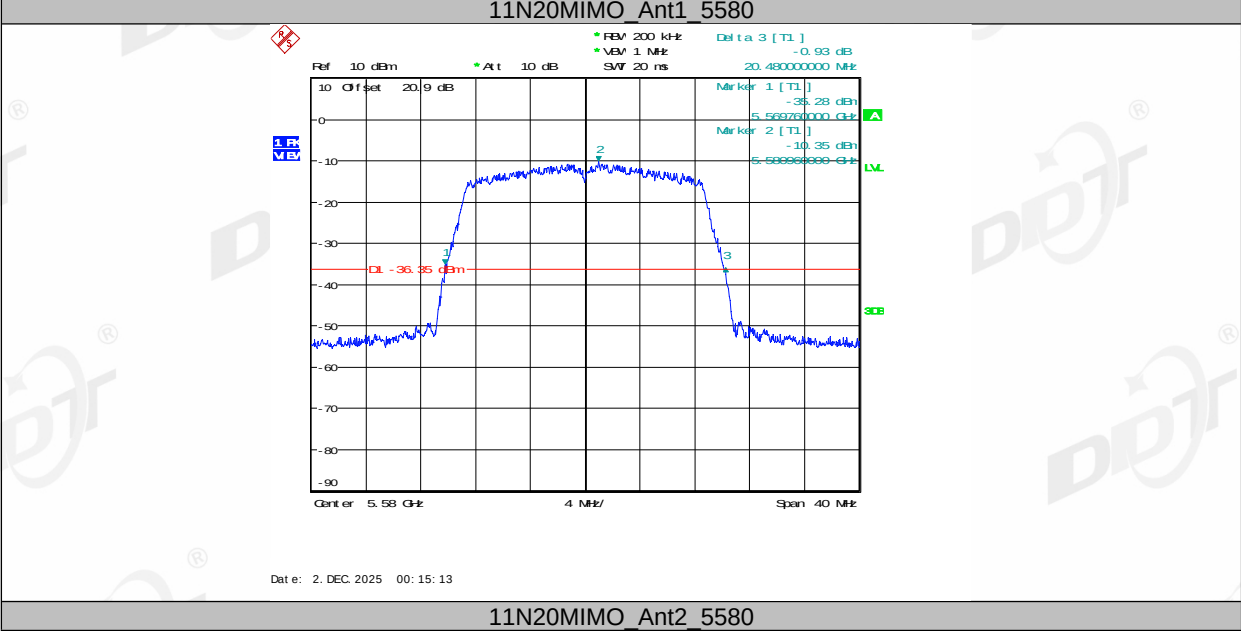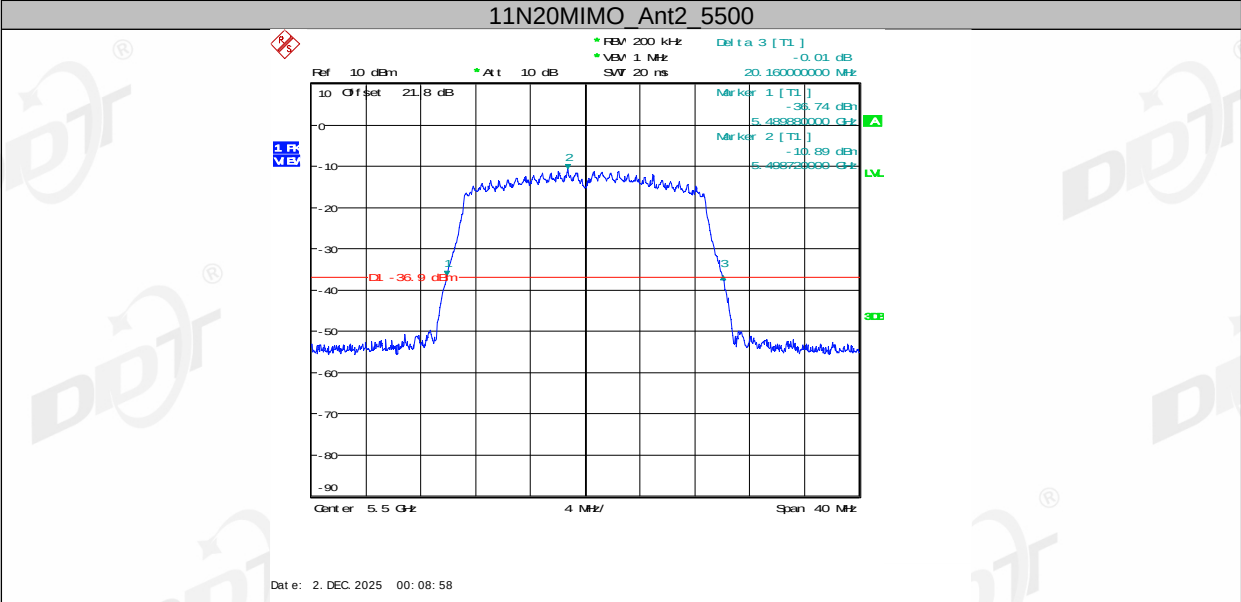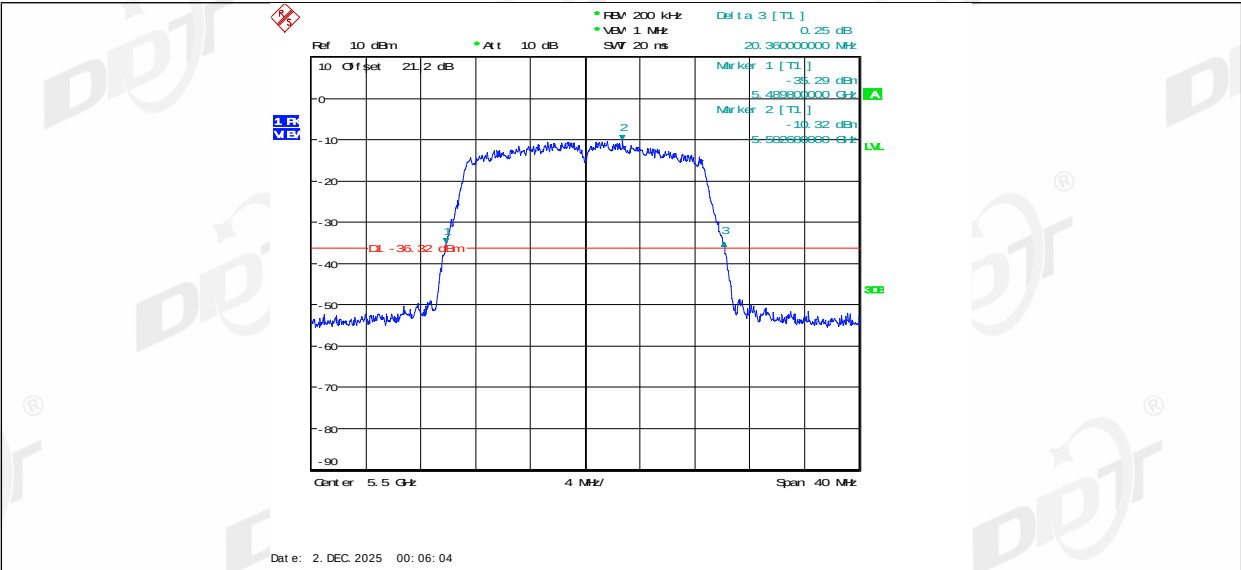


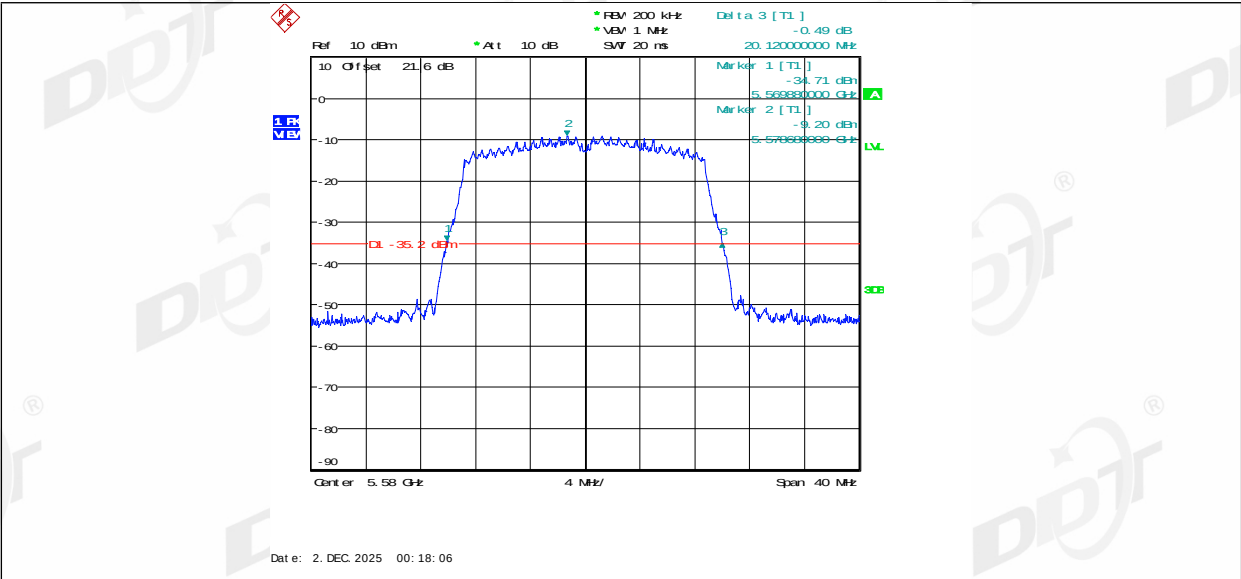


11N20MIMO_Ant1_5700

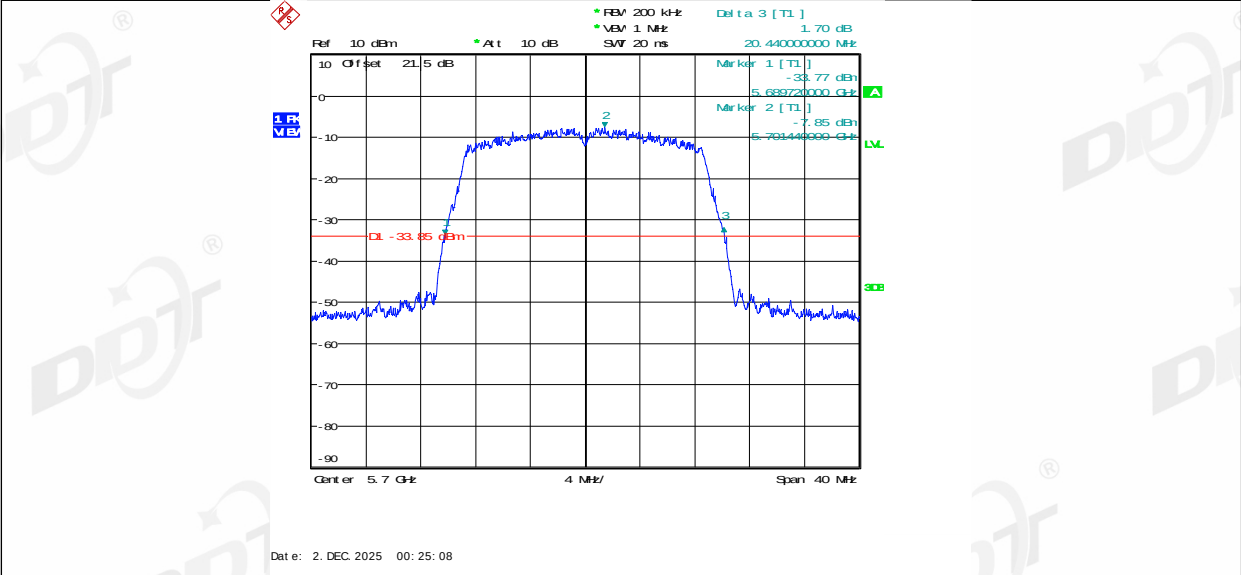


11N20MIMO_Ant2_5700

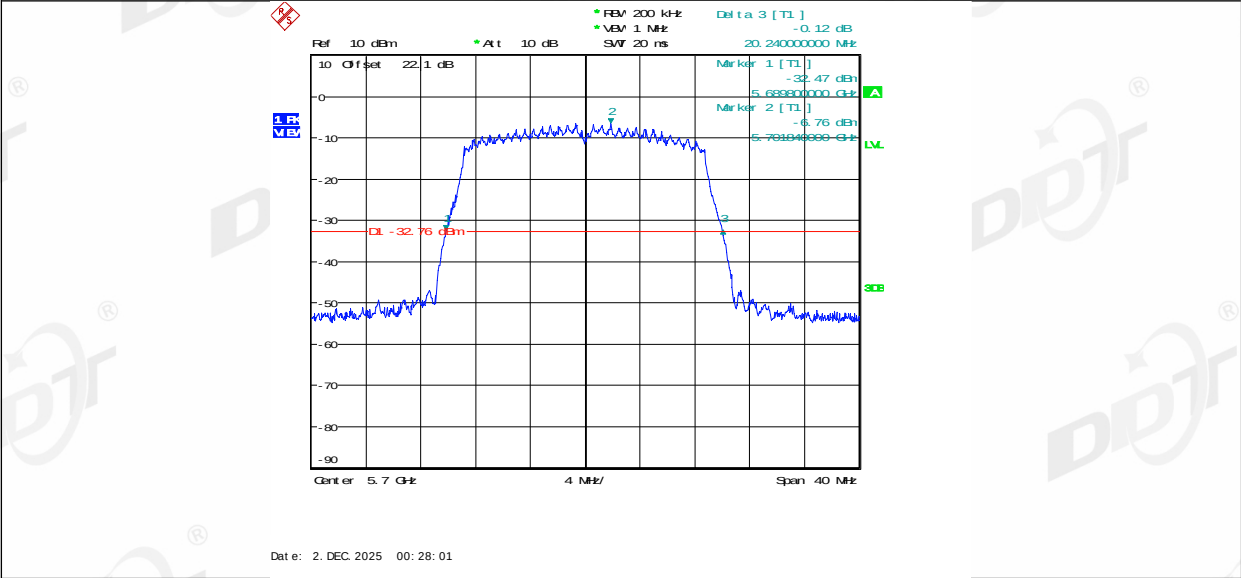


11N20MIMO_Ant1_5745

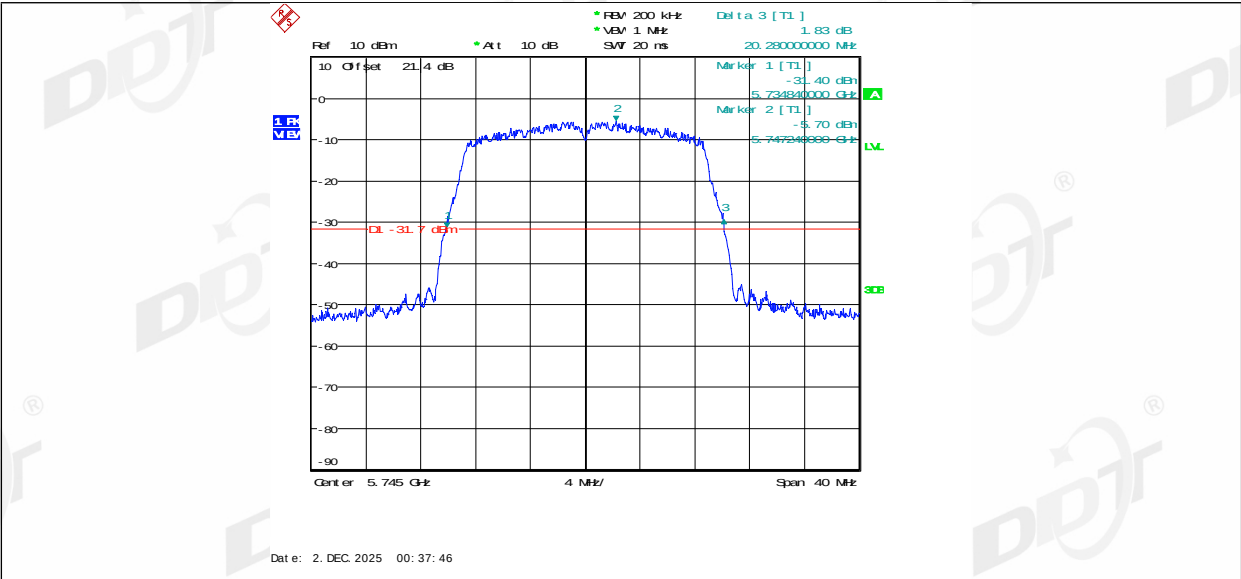


11N20MIMO_Ant2_5745

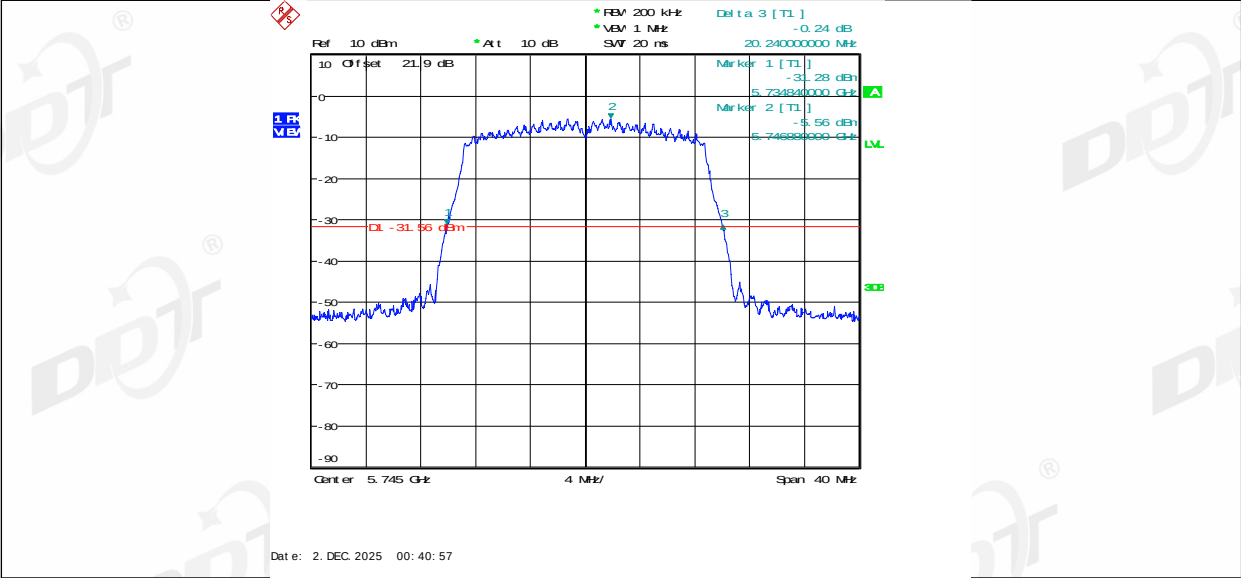


11N20MIMO_Ant1_5785

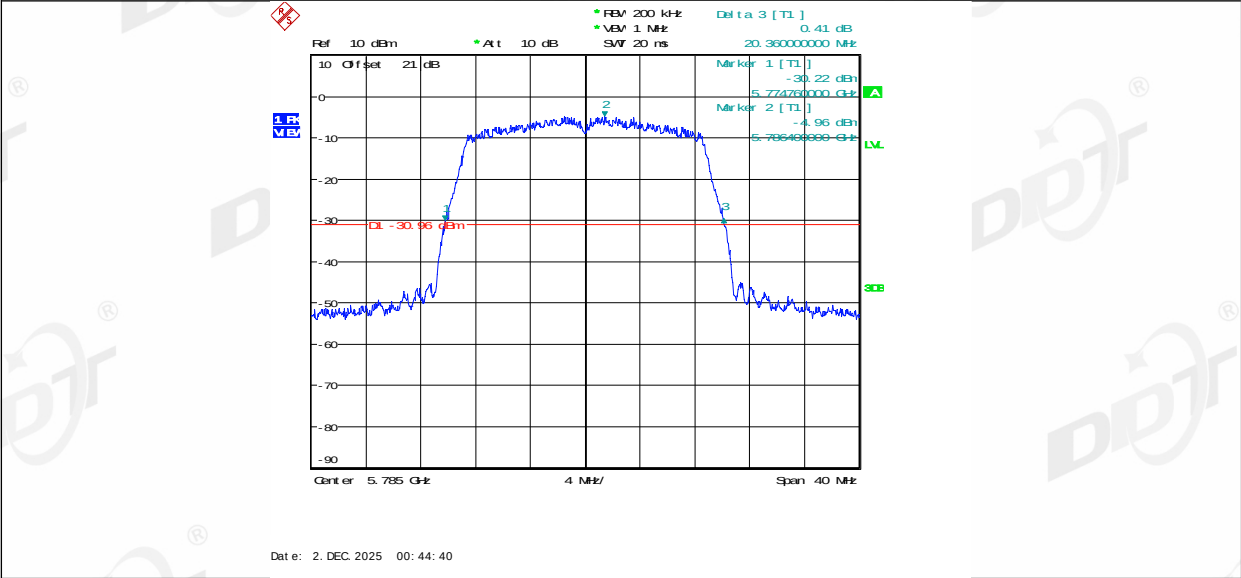


11N20MIMO_Ant2_5785

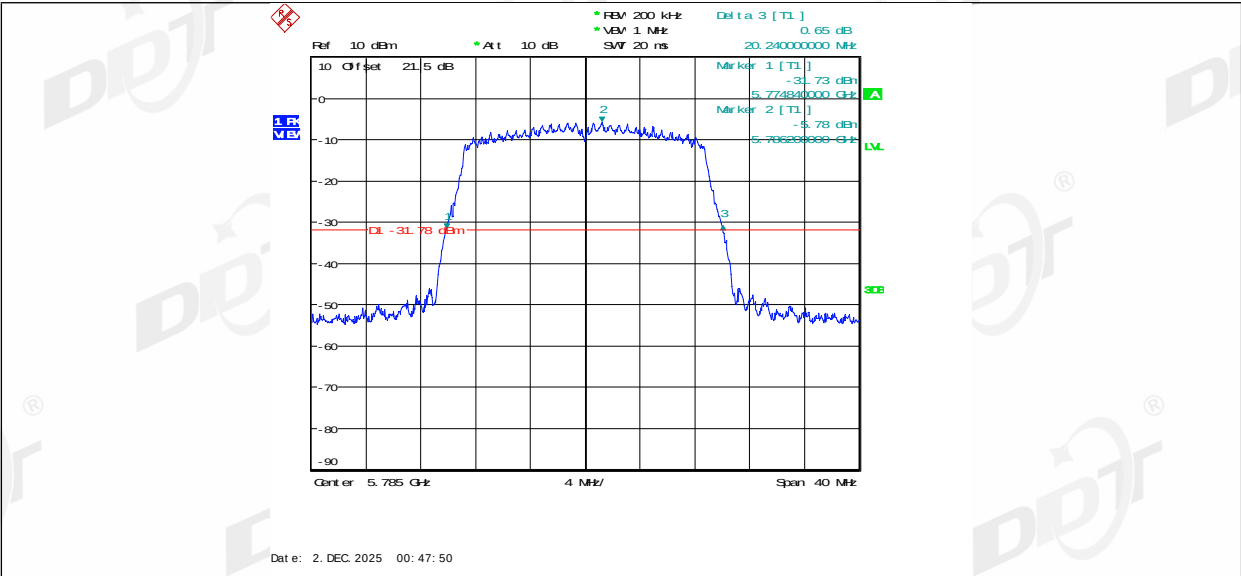


11N20MIMO_Ant1_5825

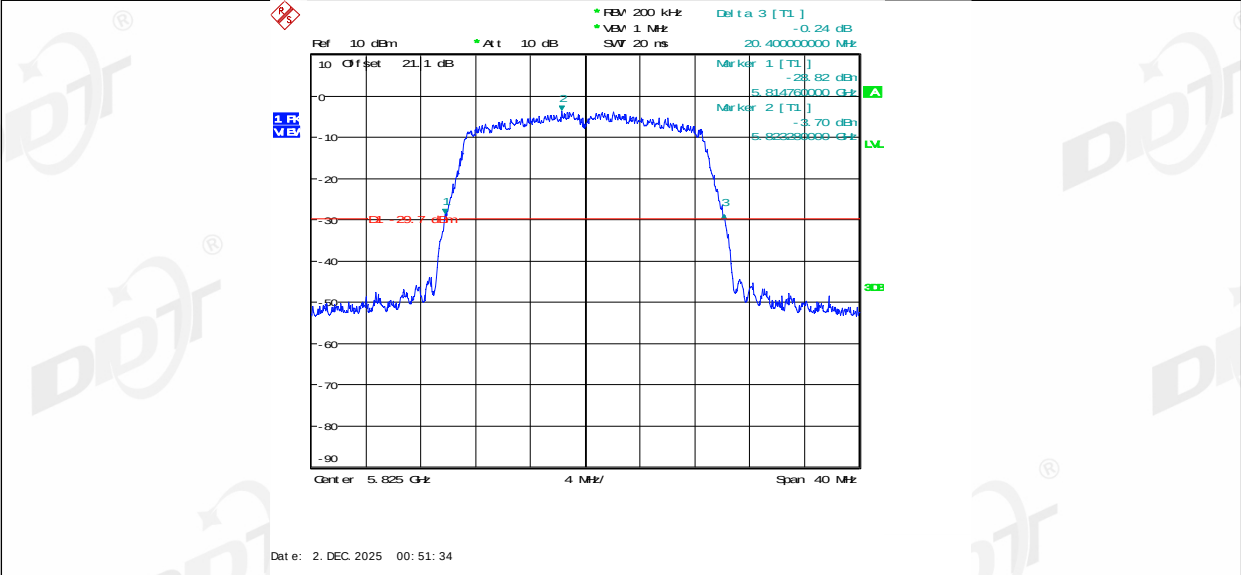


11N20MIMO_Ant2_5825

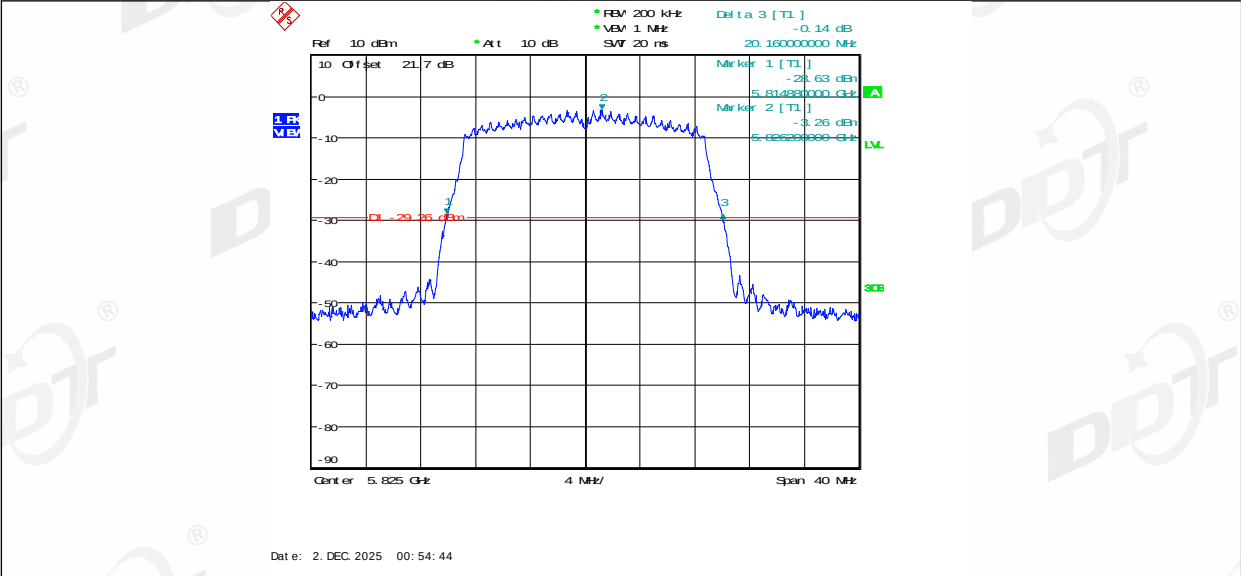


11N40MIMO_Ant1_5190

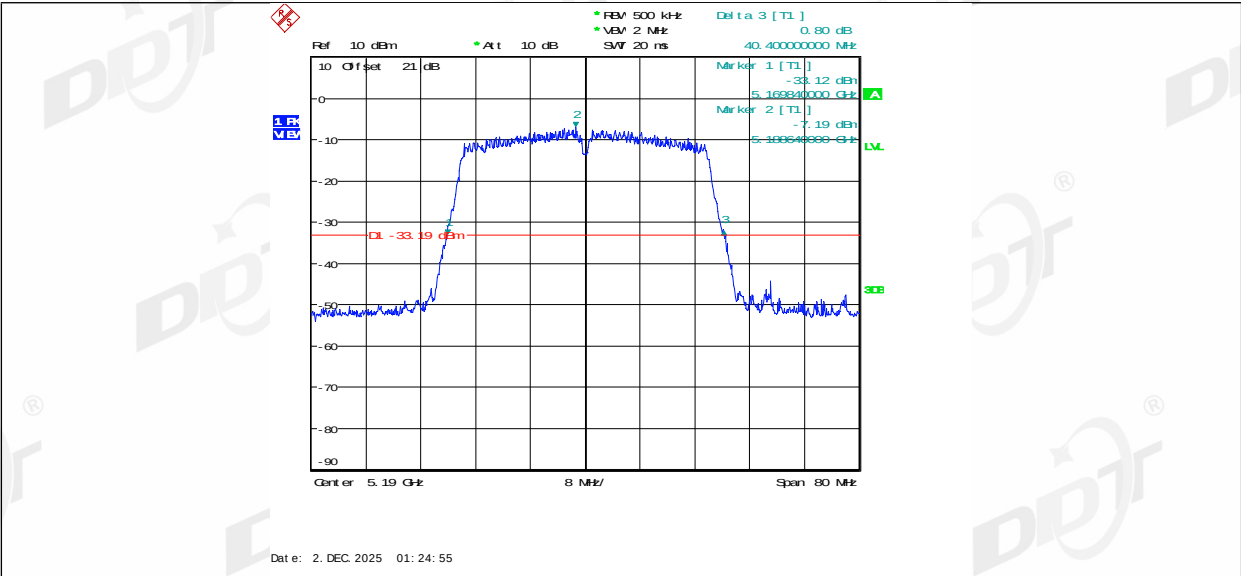


11N40MIMO_Ant2_5190

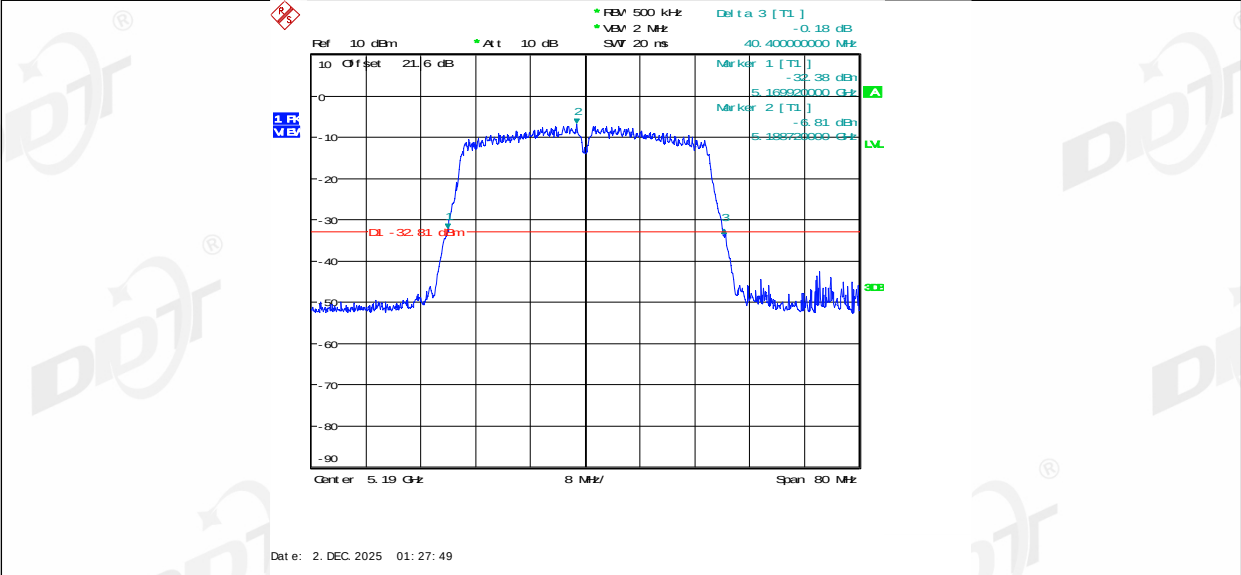


11N40MIMO_Ant1_5230

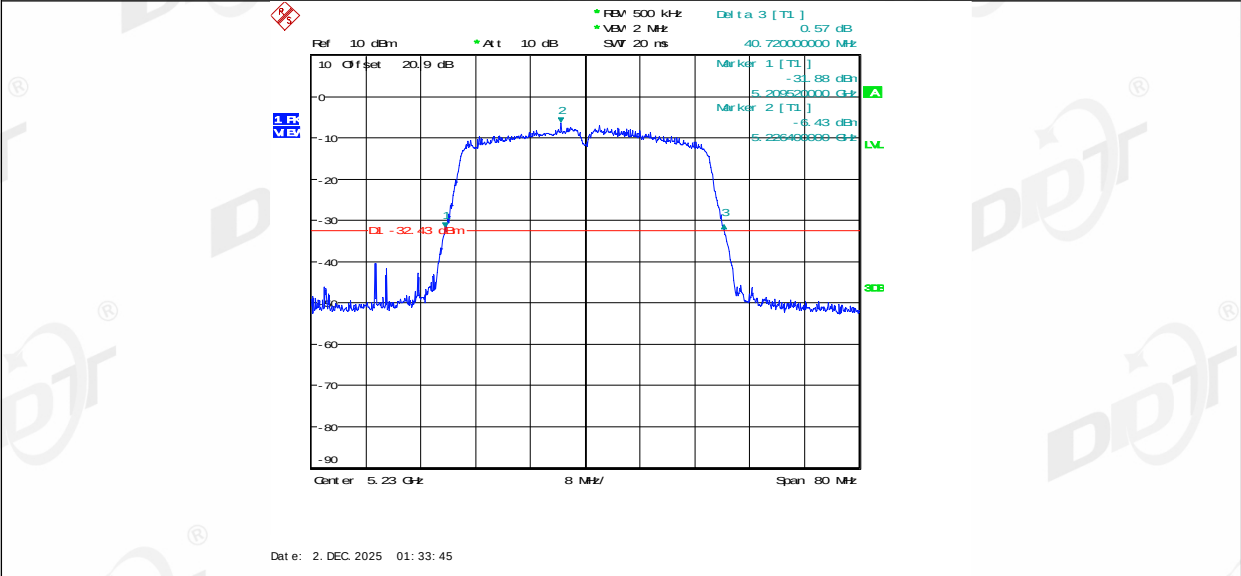


11N40MIMO_Ant2_5230

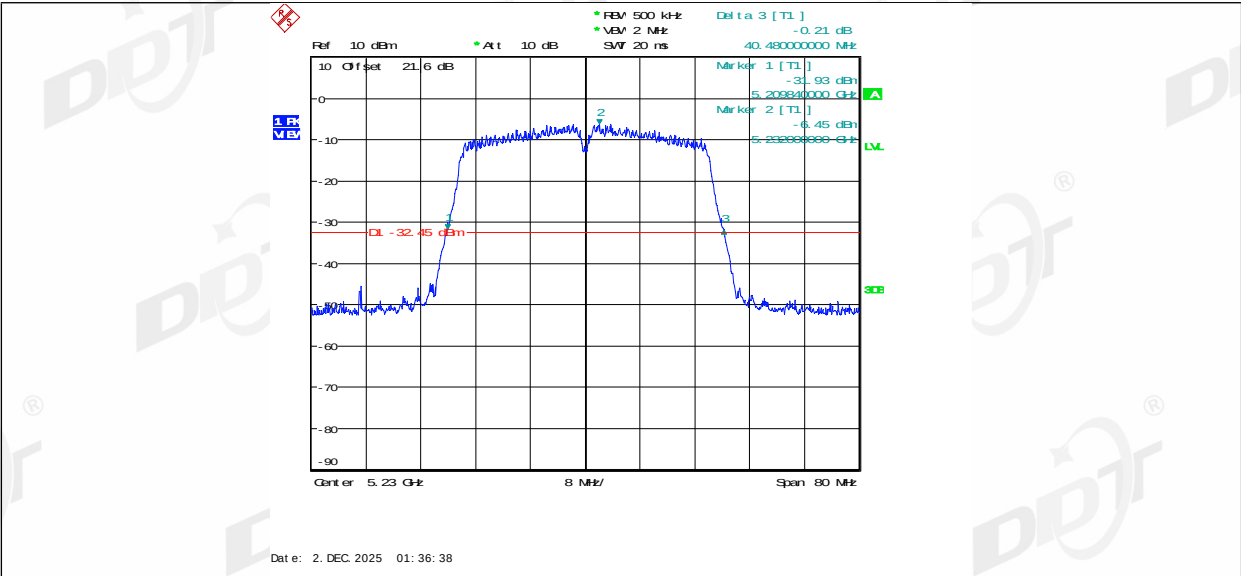


11N40MIMO_Ant1_5270

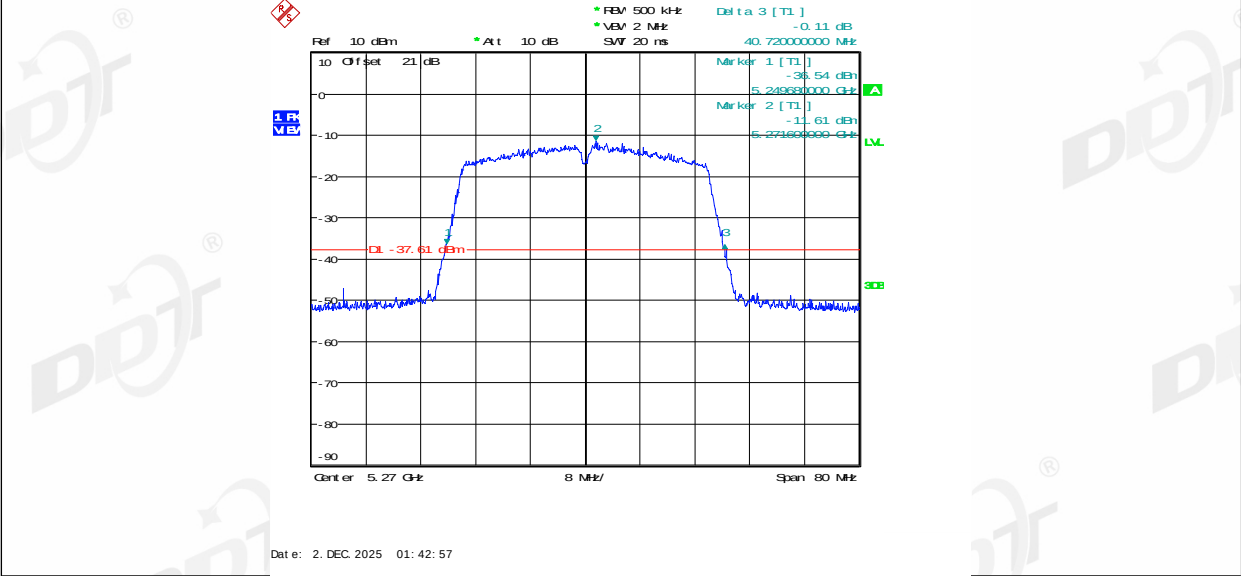


11N40MIMO_Ant2_5270

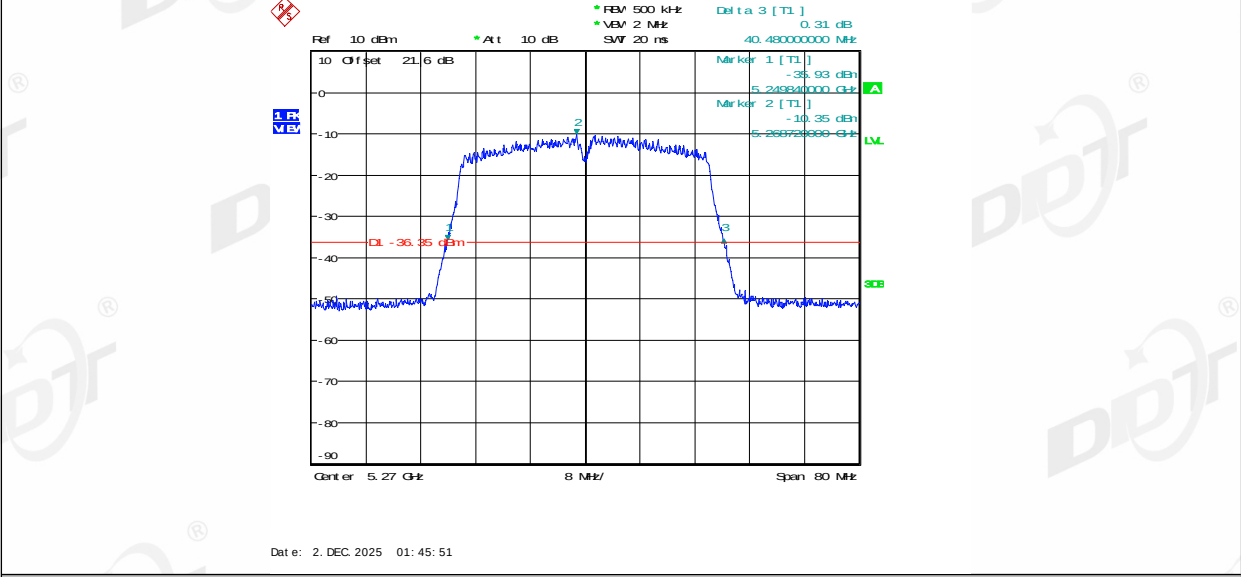


11N40MIMO_Ant1_5310

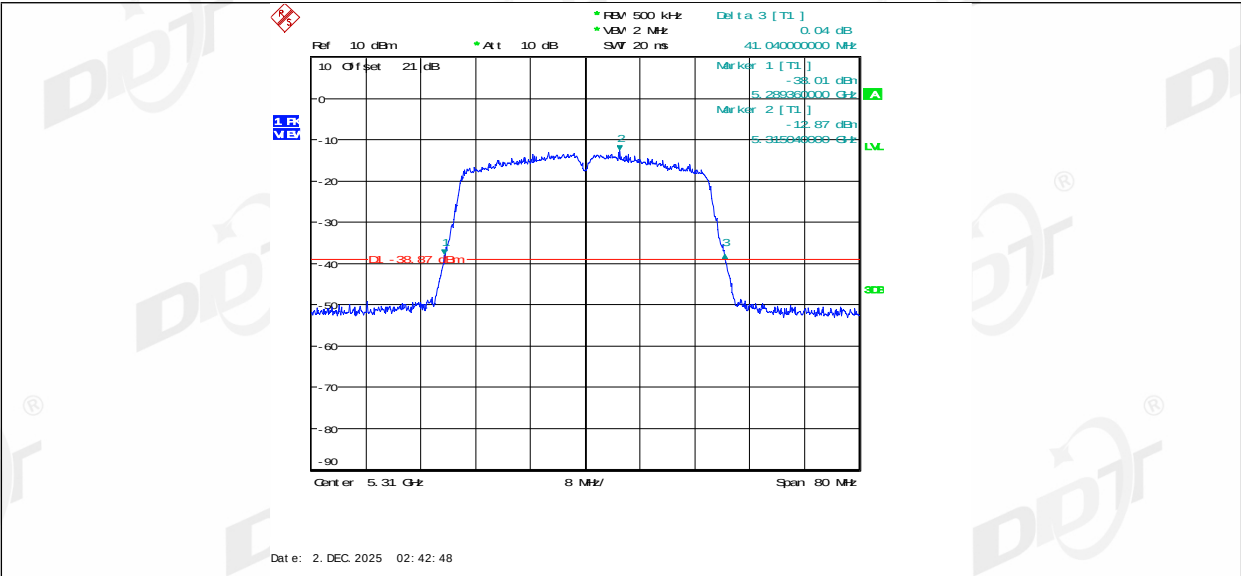


11N40MIMO_Ant2_5310

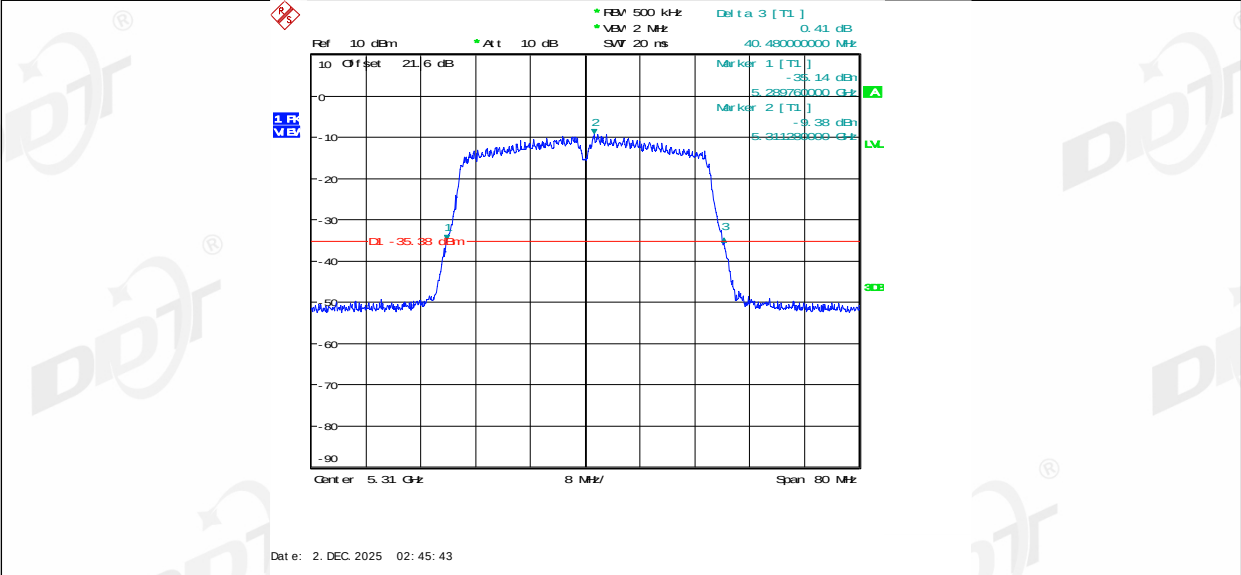


11N40MIMO_Ant1_5510

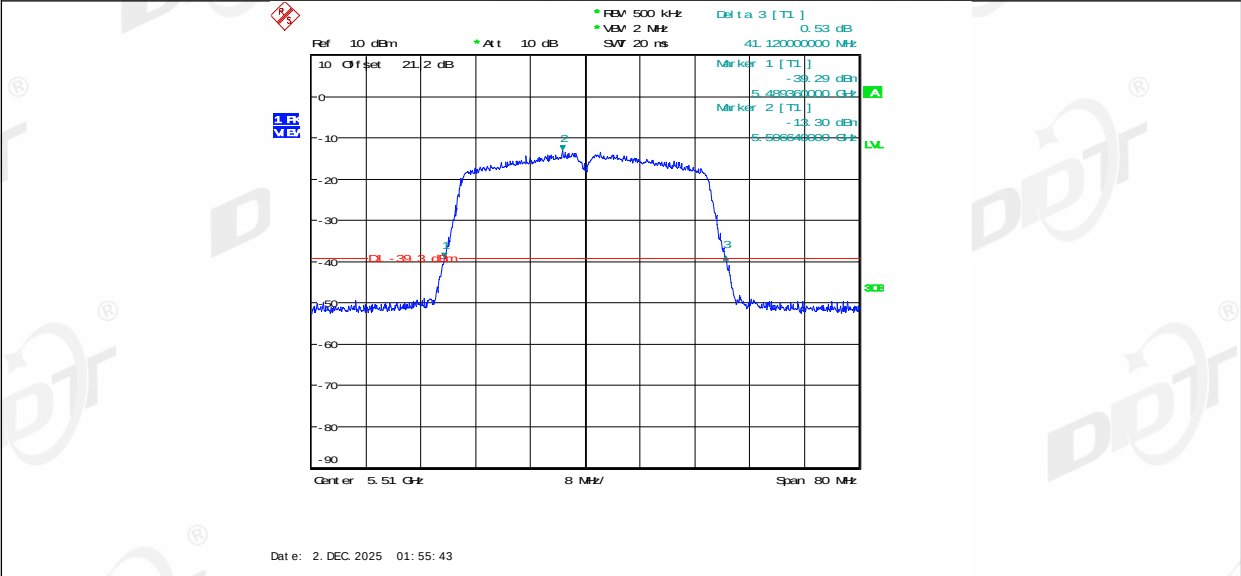


11N40MIMO_Ant2_5510

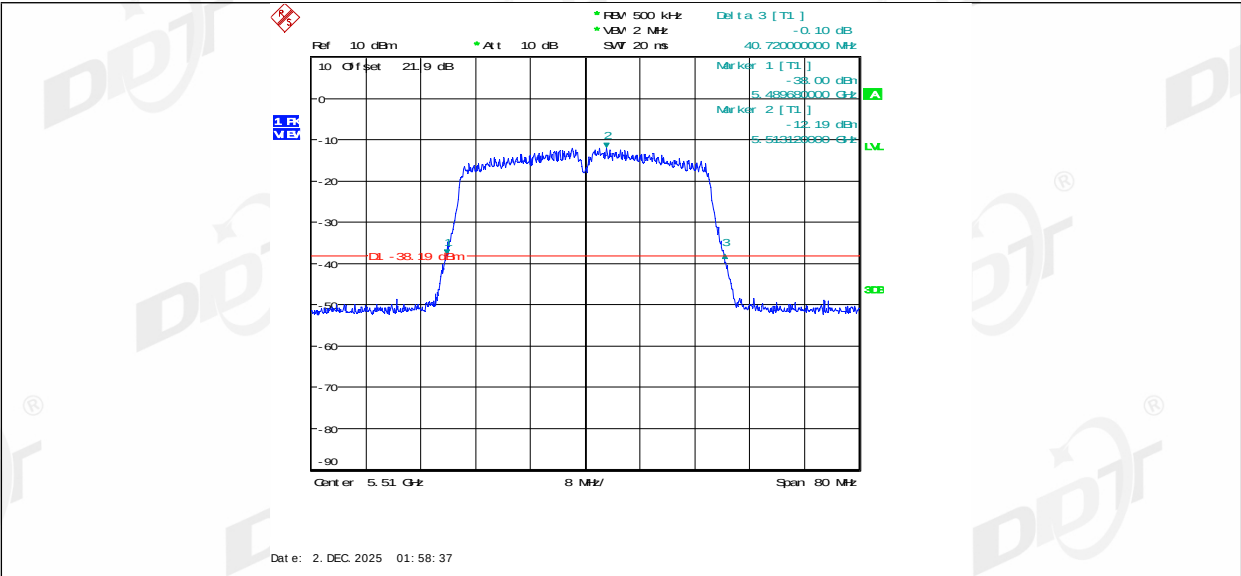


11N40MIMO_Ant1_5550

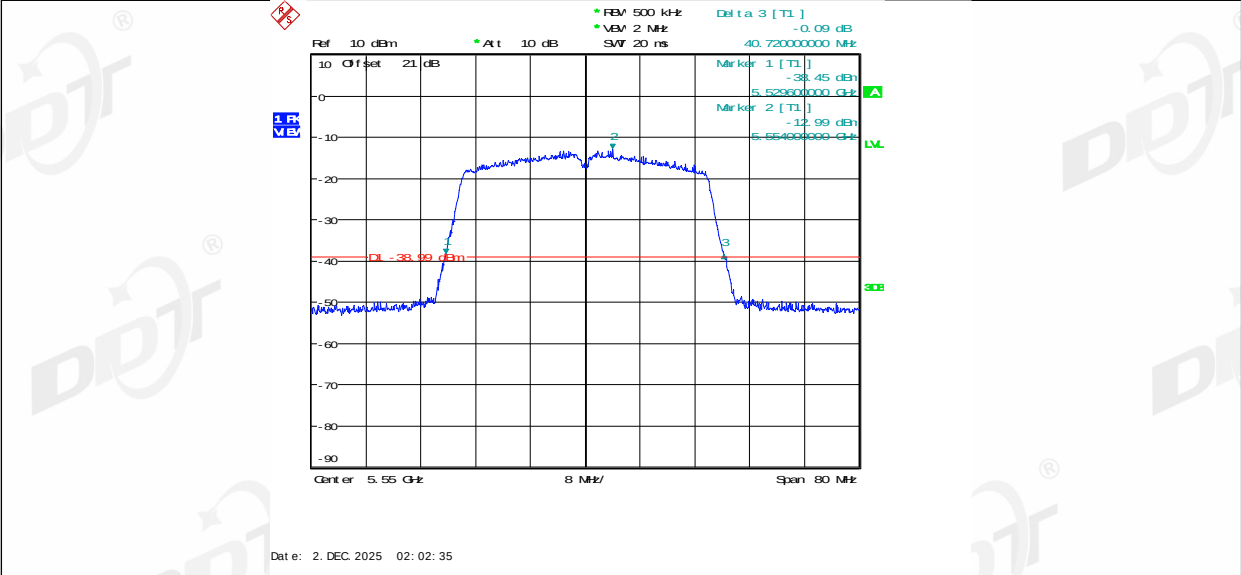


11N40MIMO_Ant2_5550

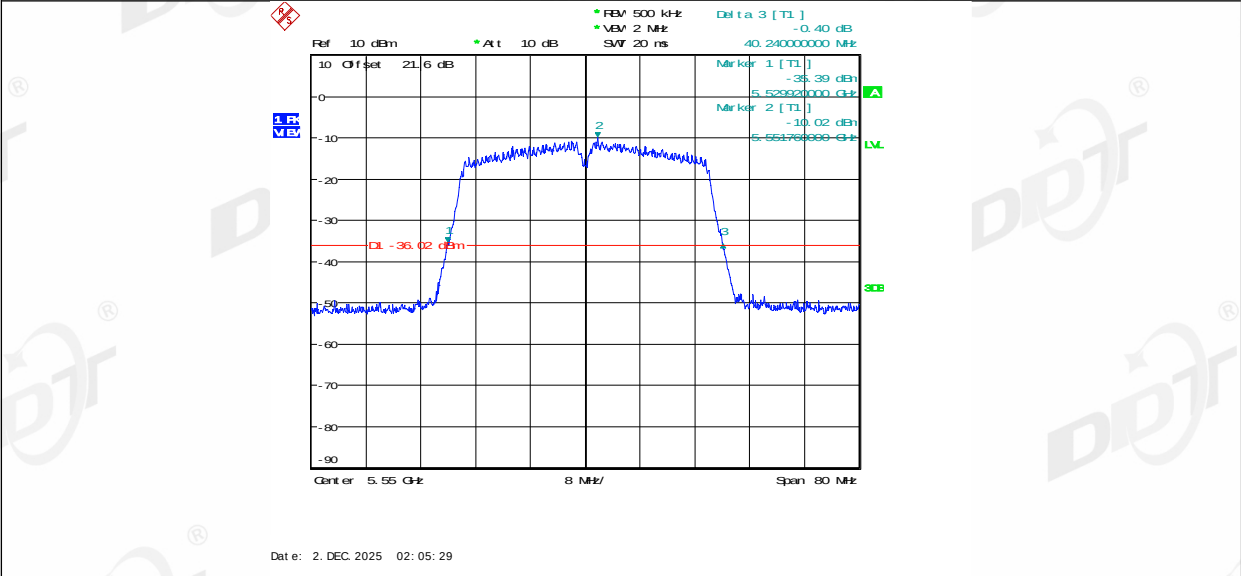


11N40MIMO_Ant1_5670

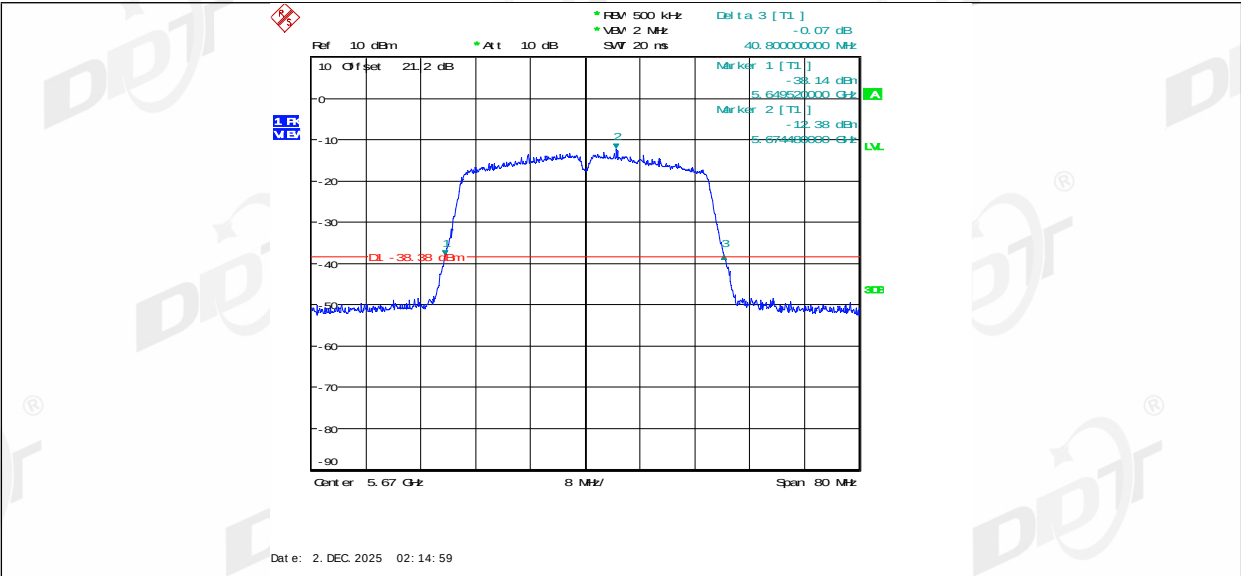


11N40MIMO_Ant2_5670

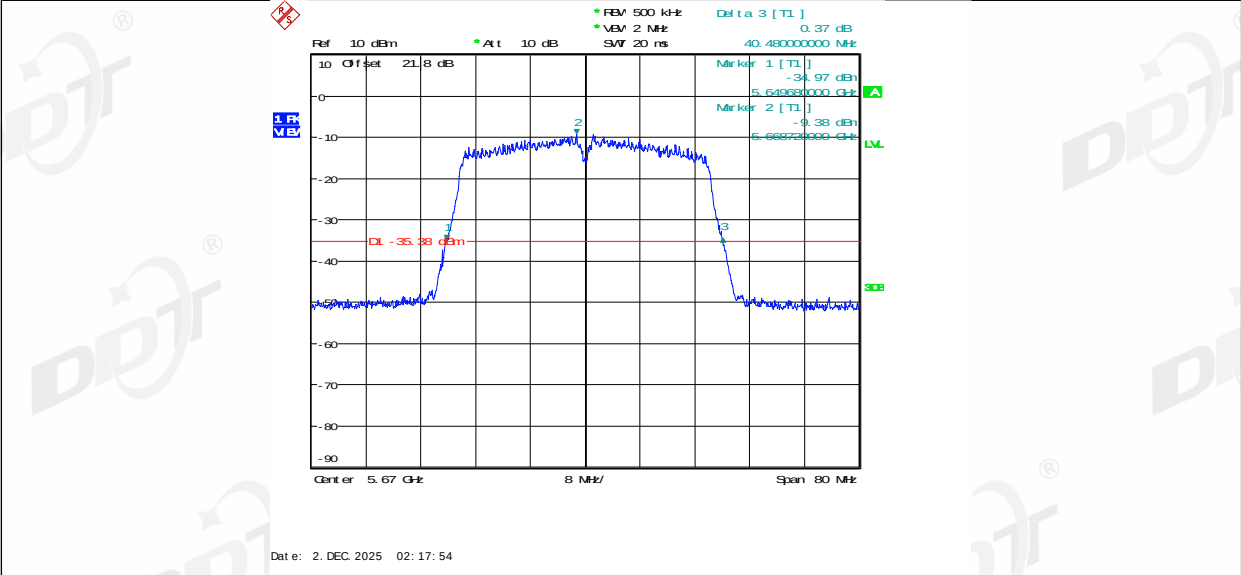


11N40MIMO_Ant1_5755

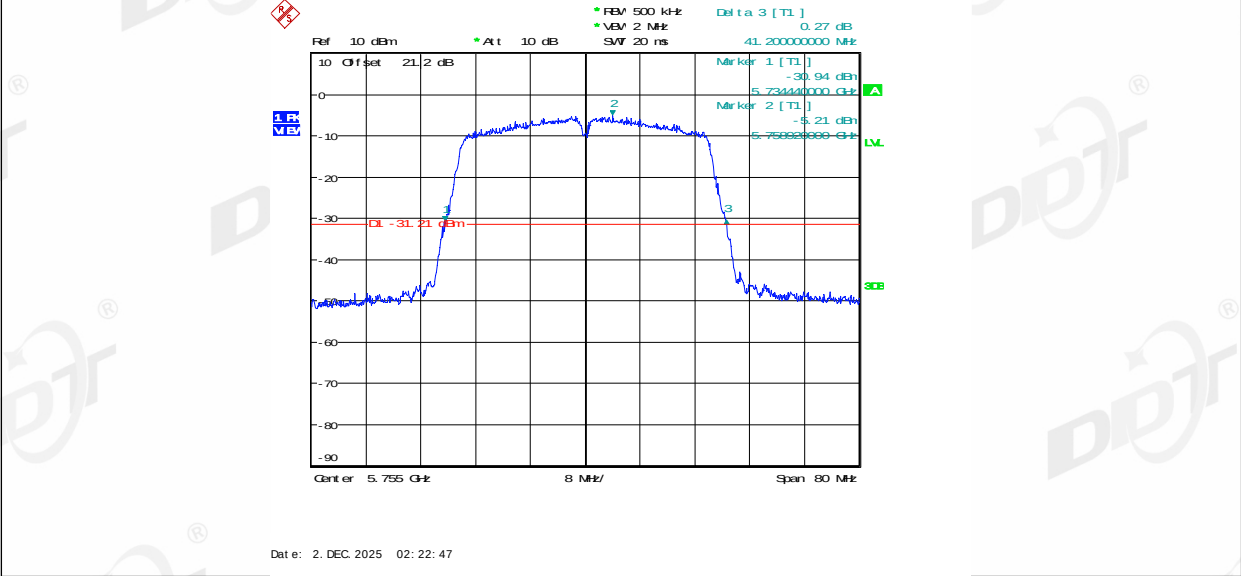


11N40MIMO_Ant2_5755

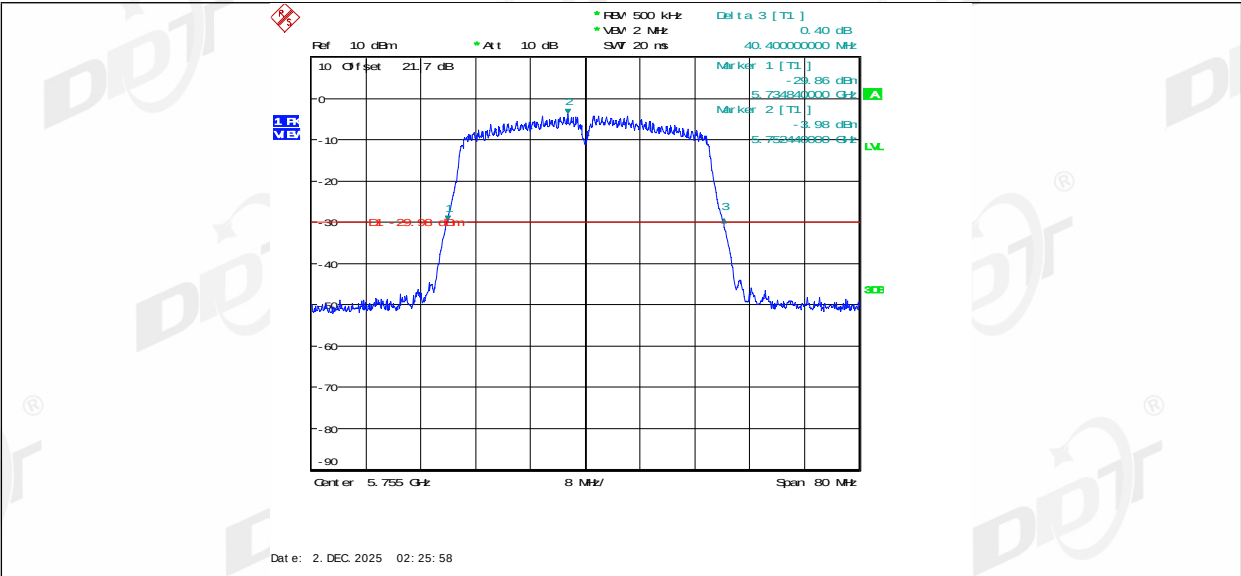


11N40MIMO_Ant1_5795

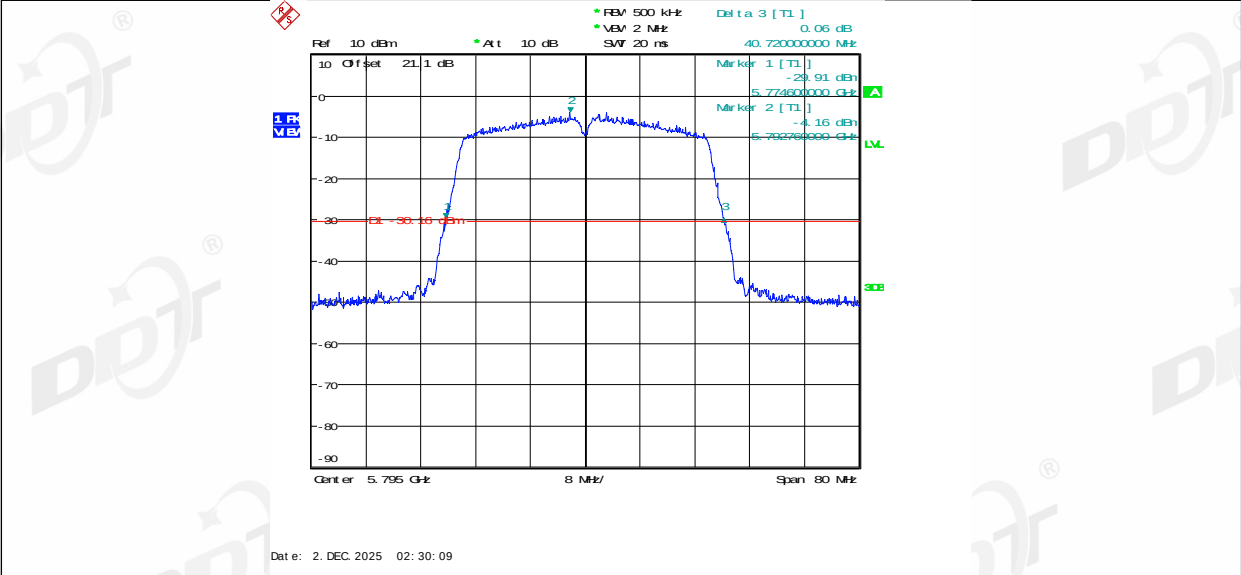


11N40MIMO_Ant2_5795

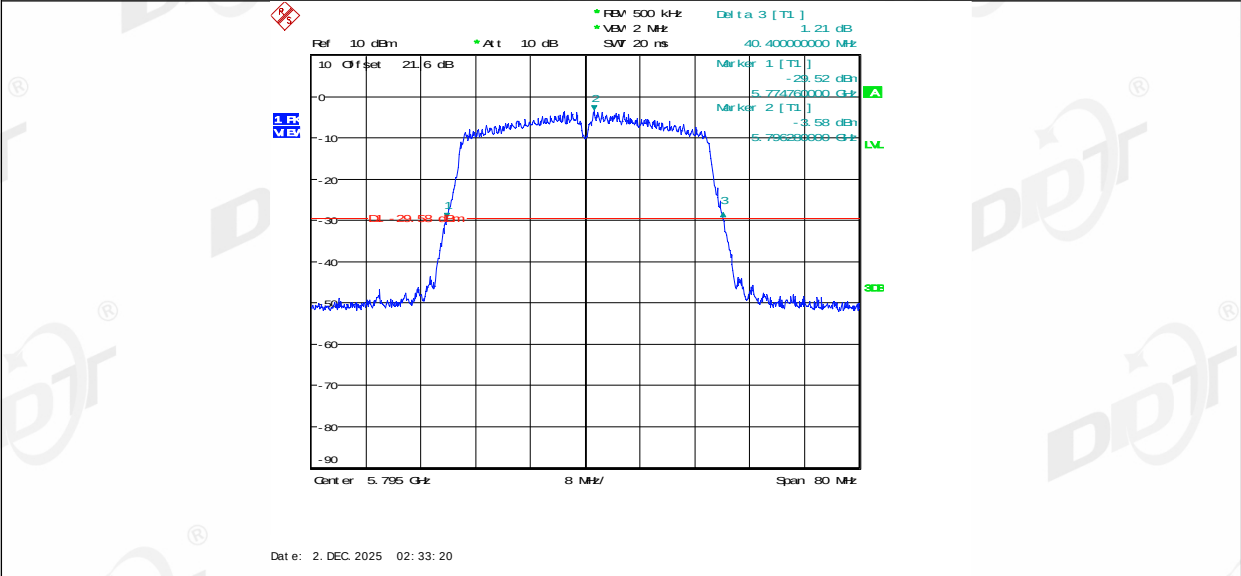


11AC20MIMO_Ant1_5180

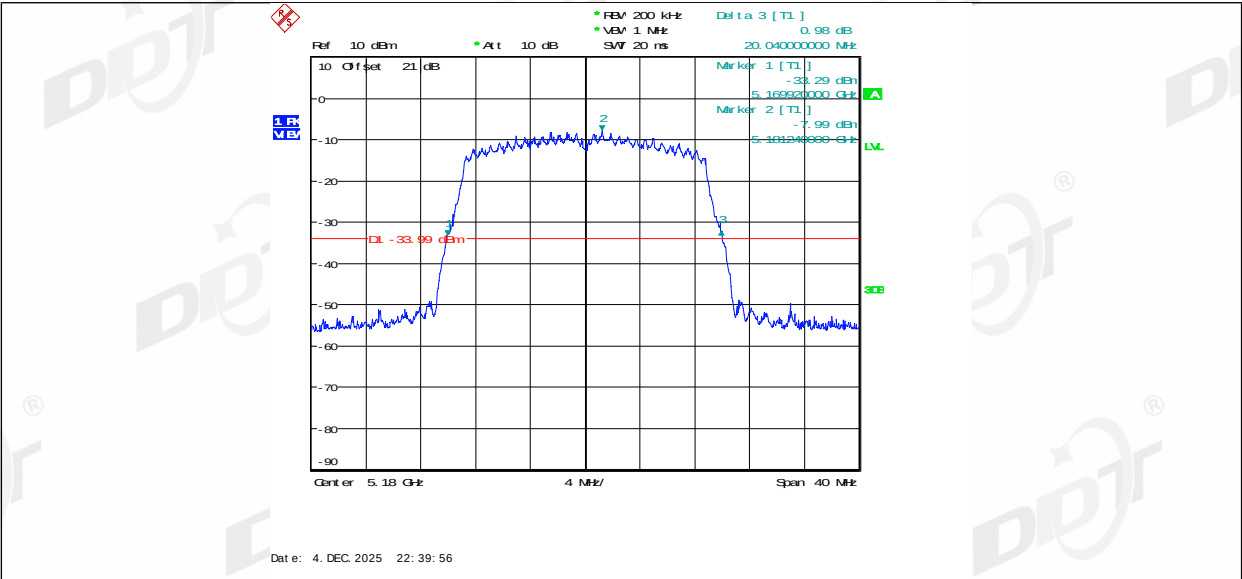




11AC20MIMO_Ant2_5180

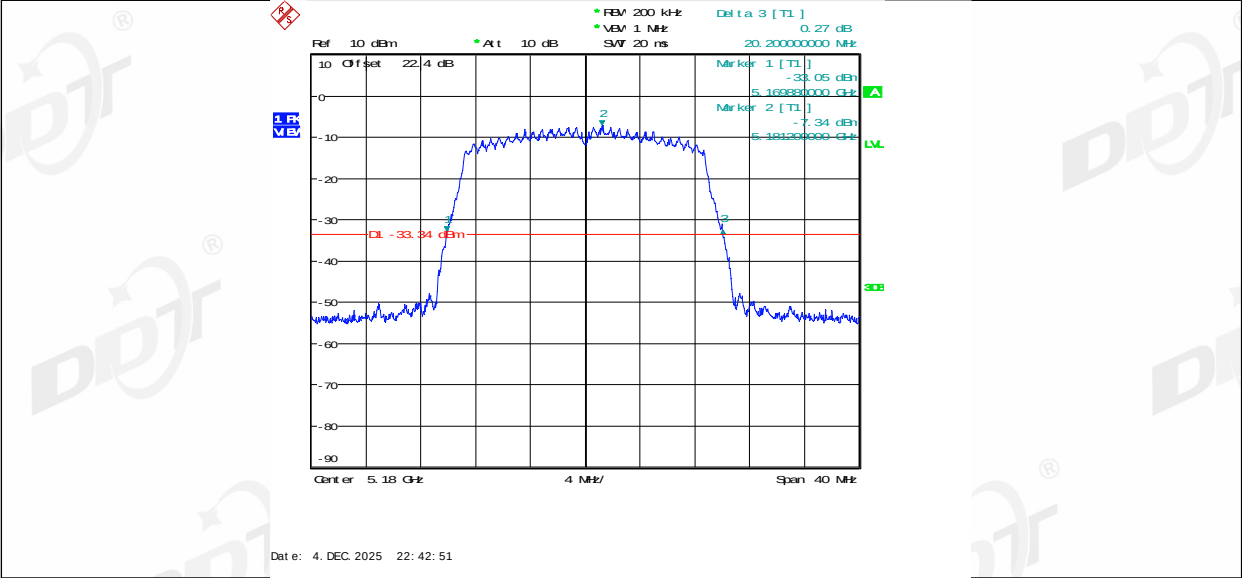


11AC20MIMO_Ant1_5200

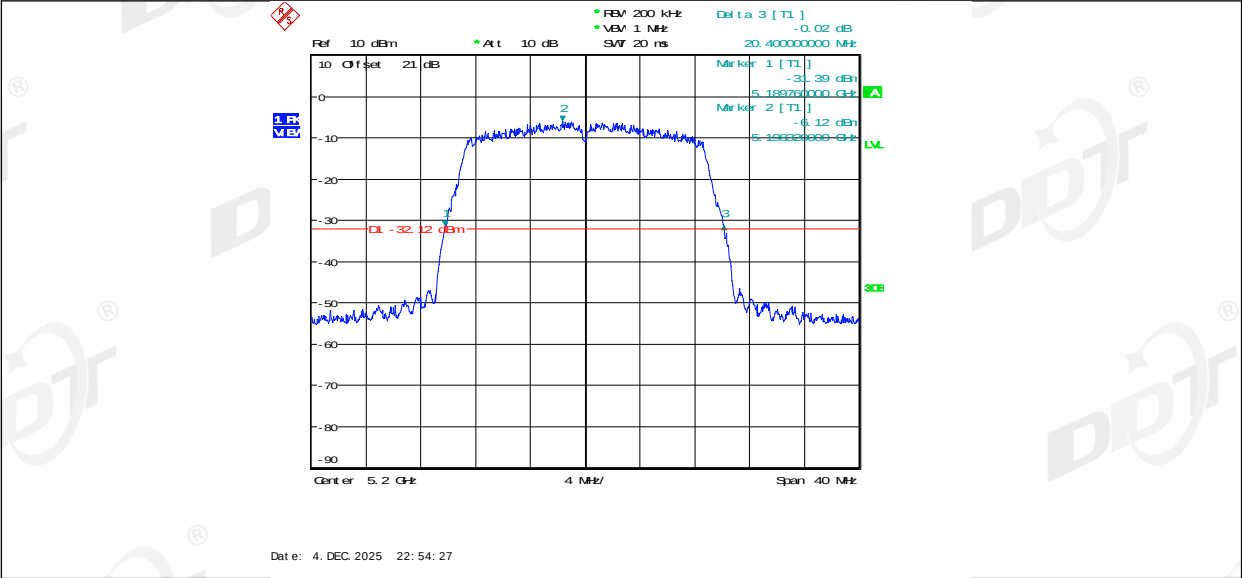


11AC20MIMO_Ant2_5200

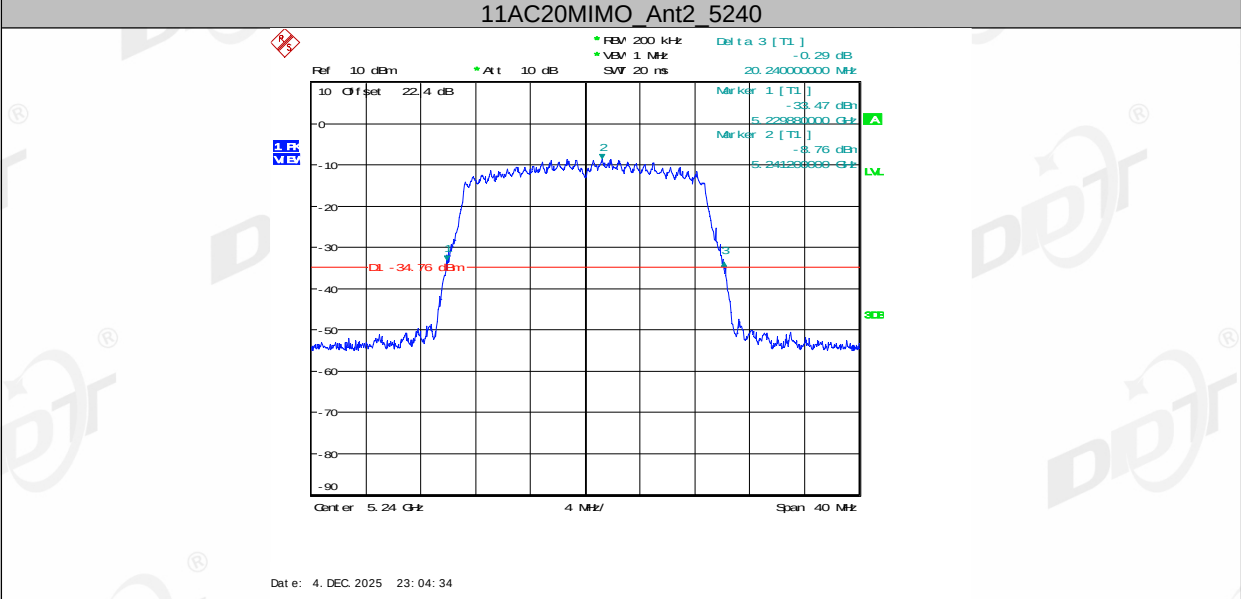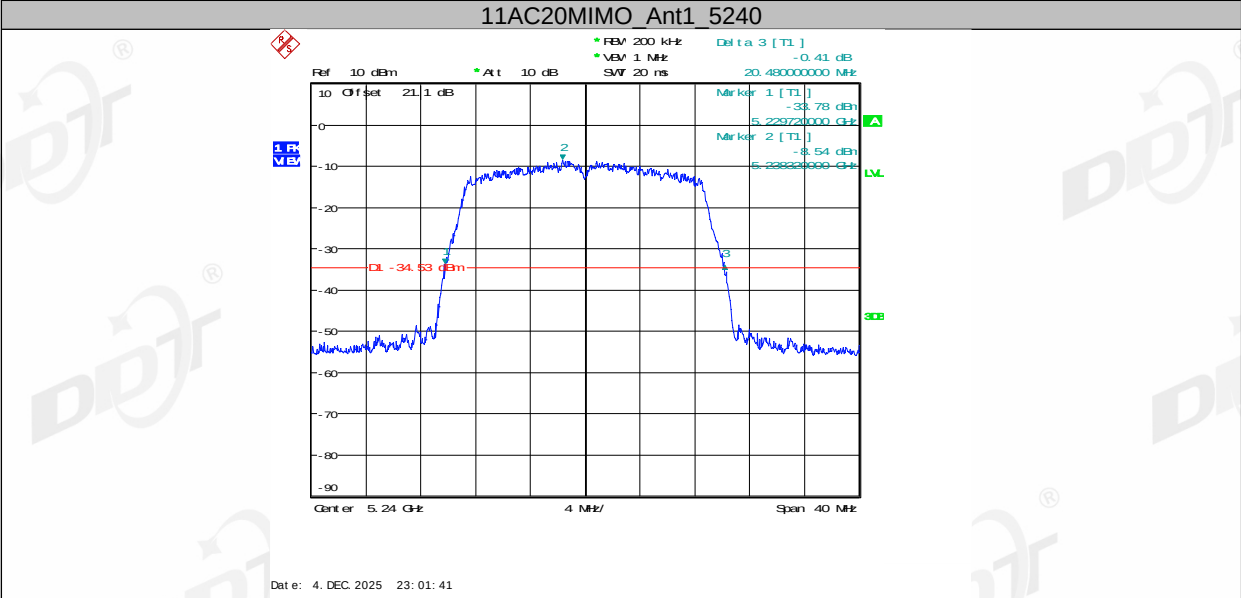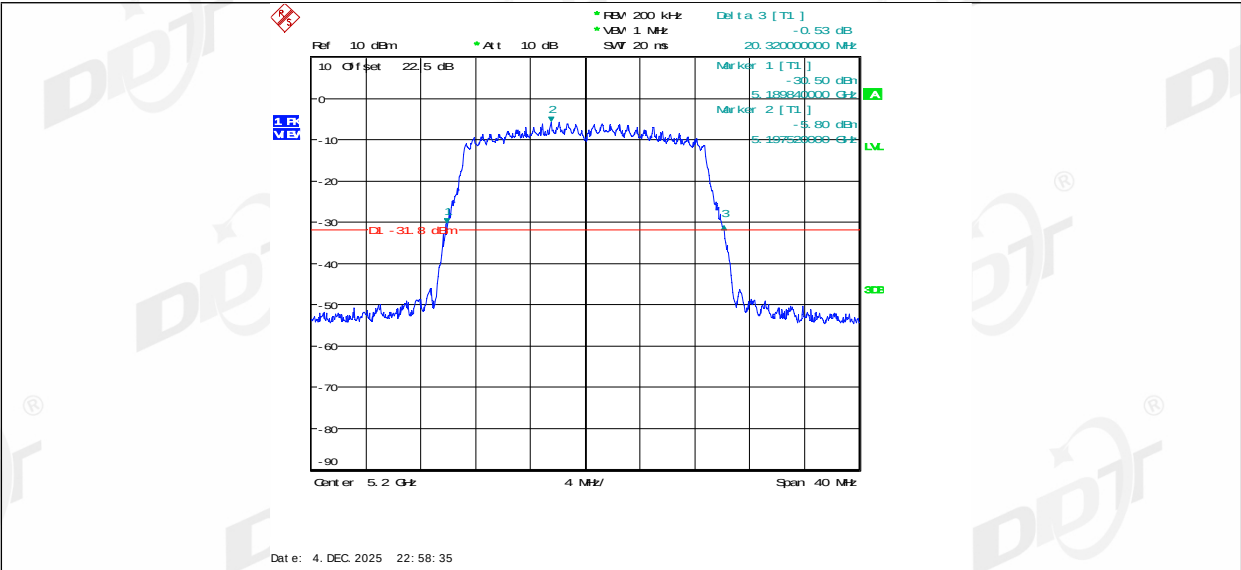


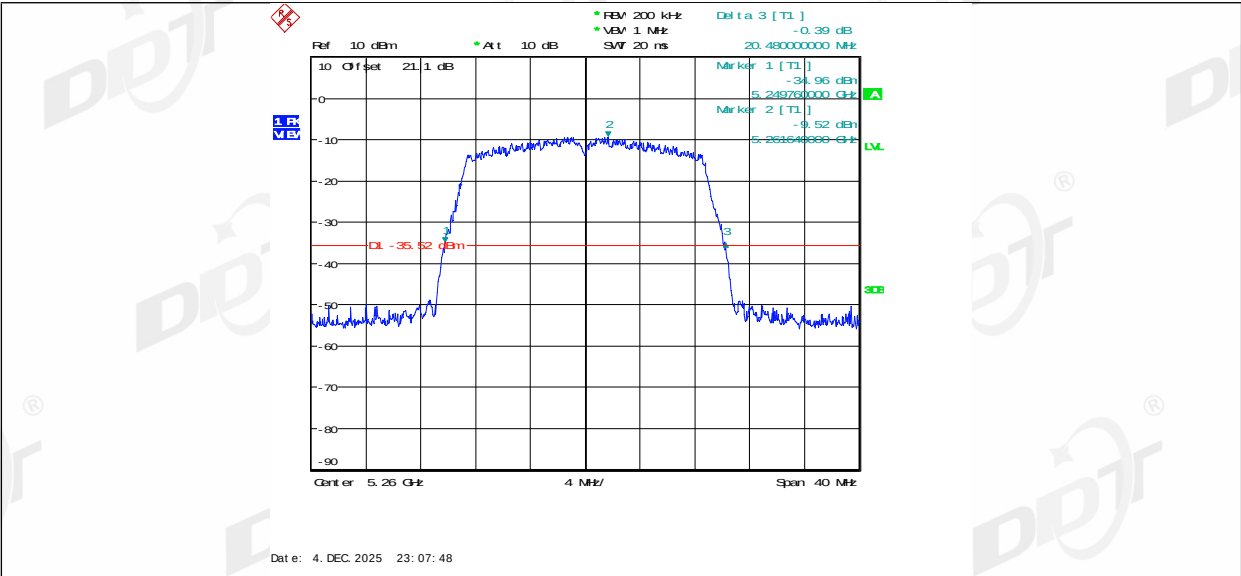





11AC20MIMO_Ant2_5260

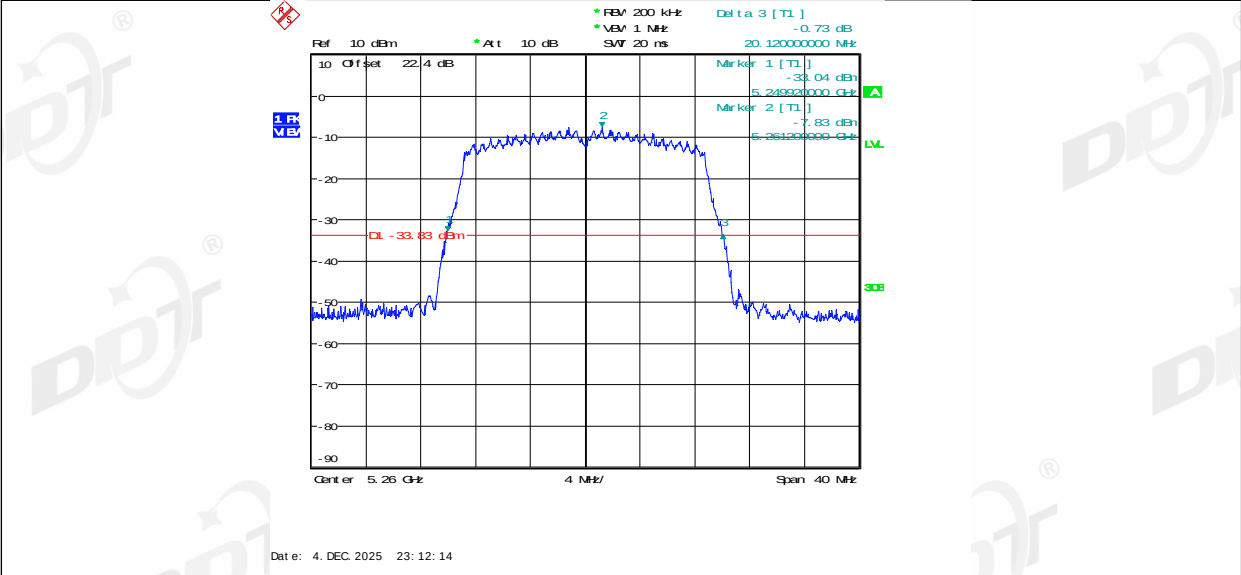


11AC20MIMO_Ant1_5280

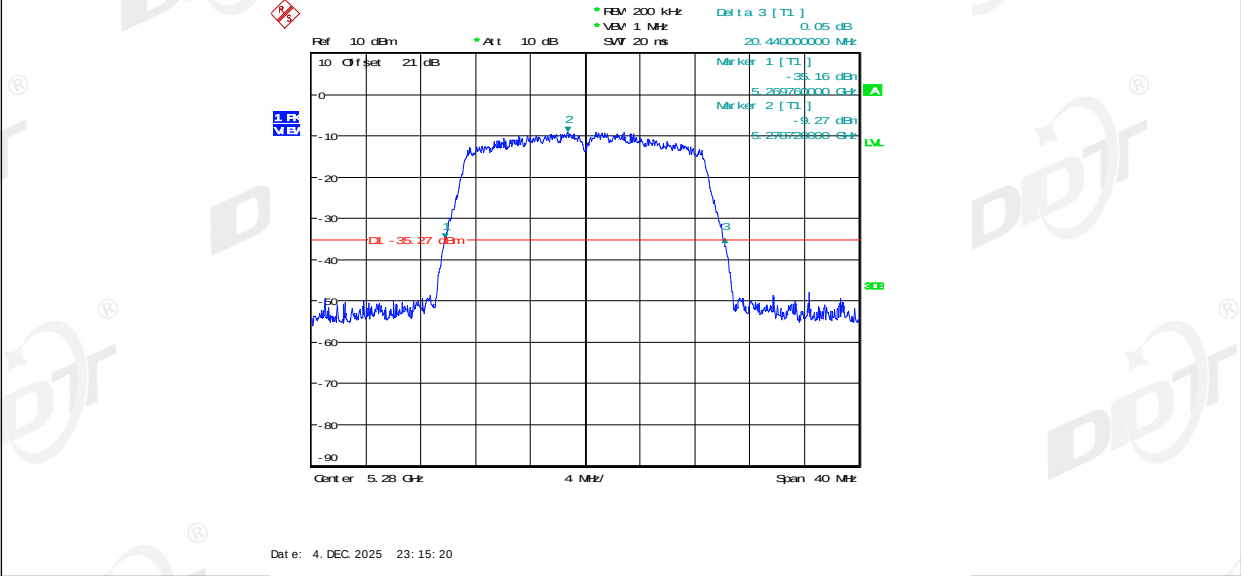


11AC20MIMO_Ant2_5280

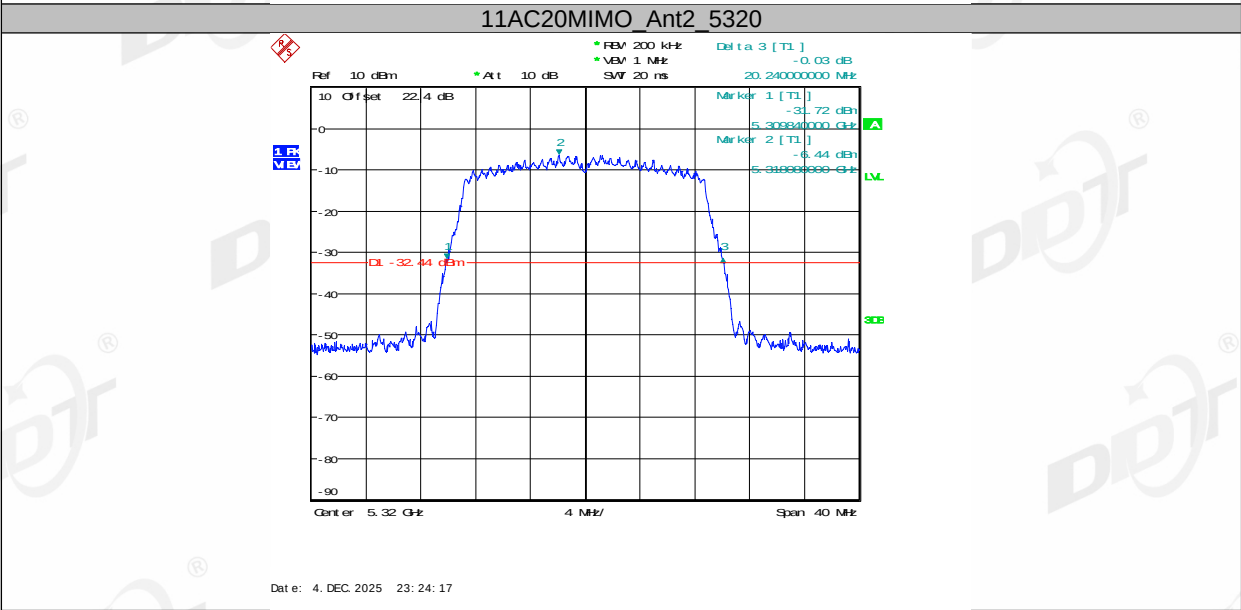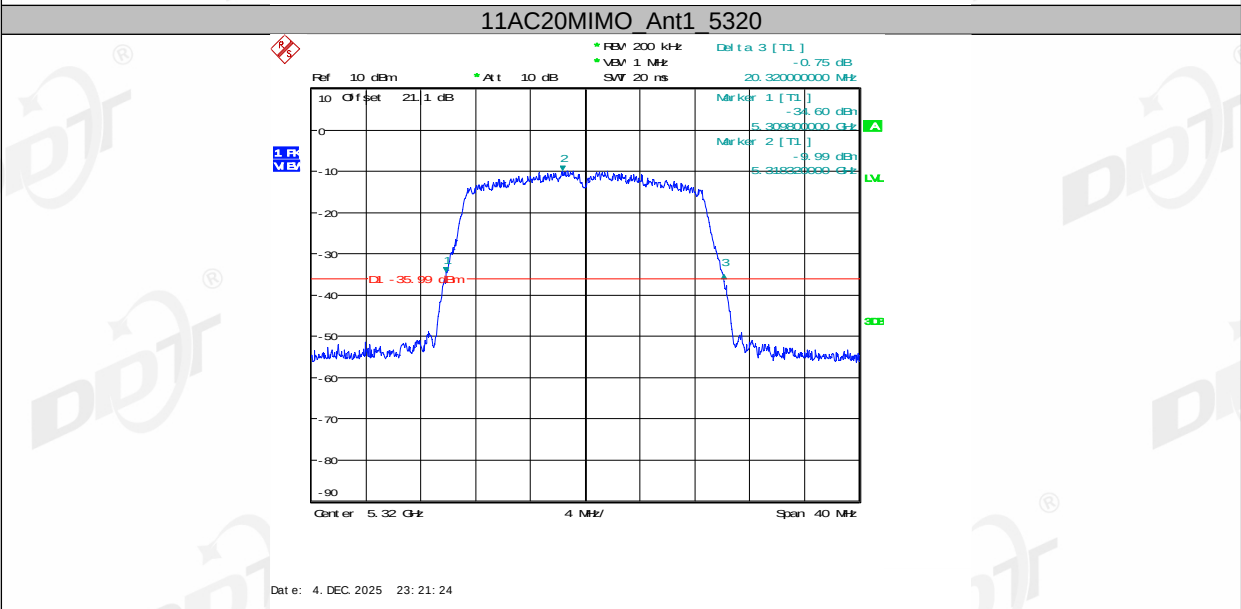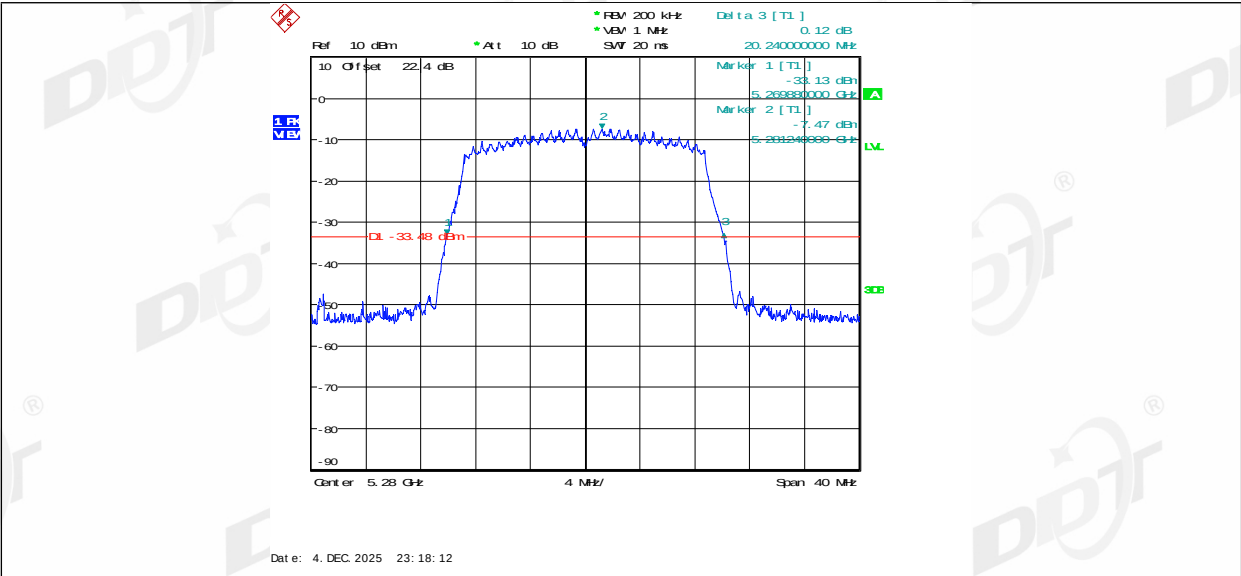


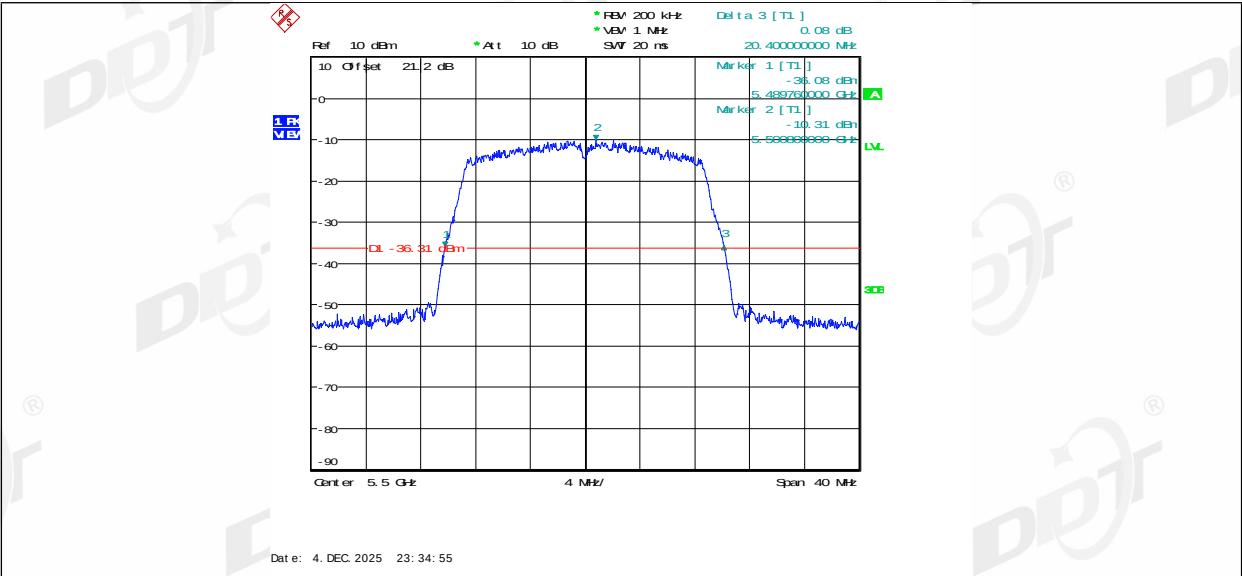




11AC20MIMO_Ant2_5500

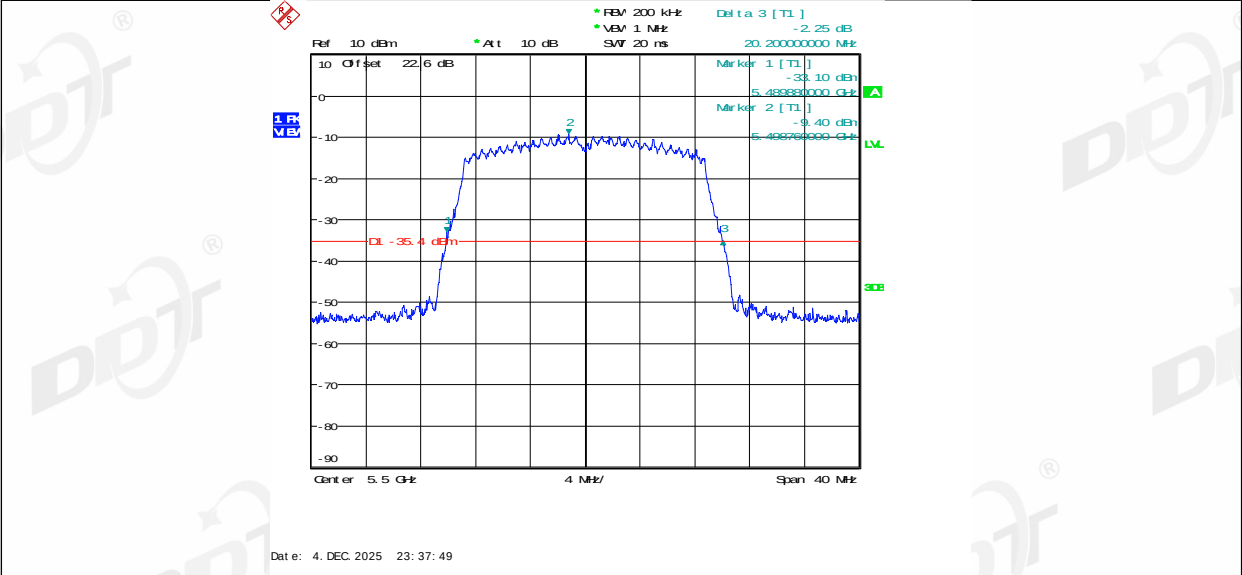


11AC20MIMO_Ant1_5580

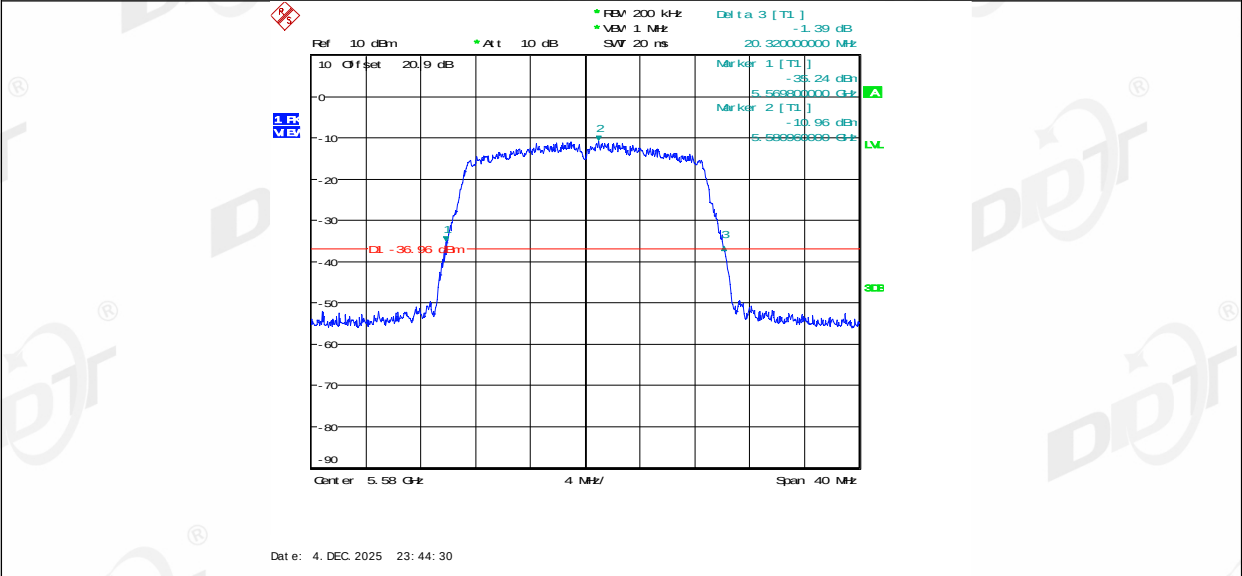


11AC20MIMO_Ant2_5580

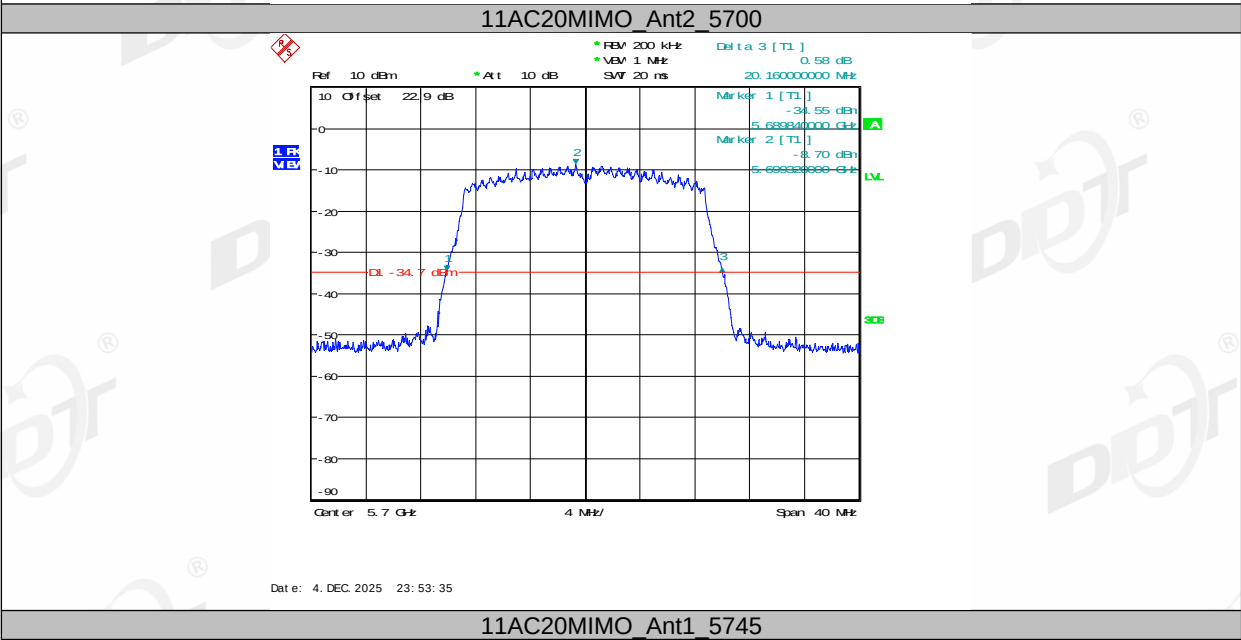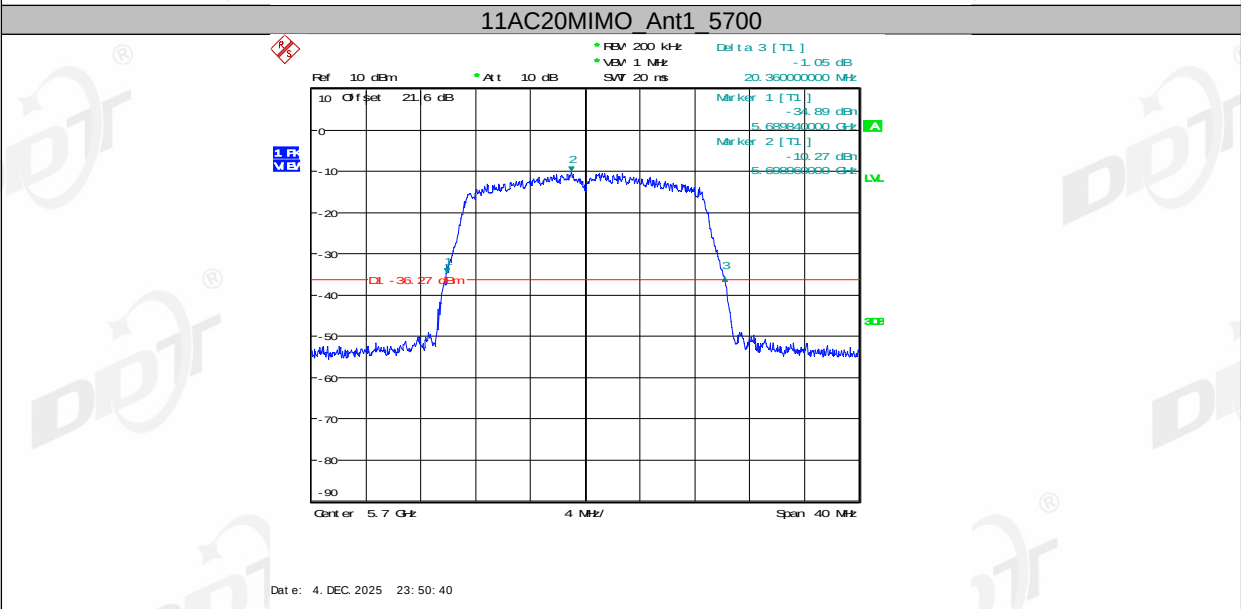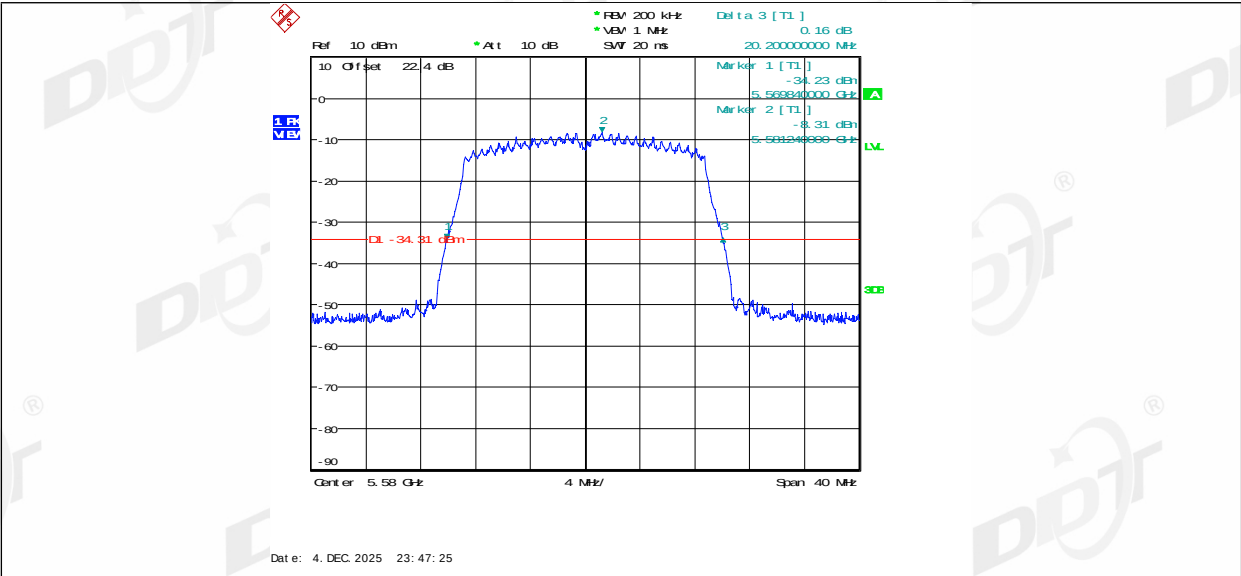


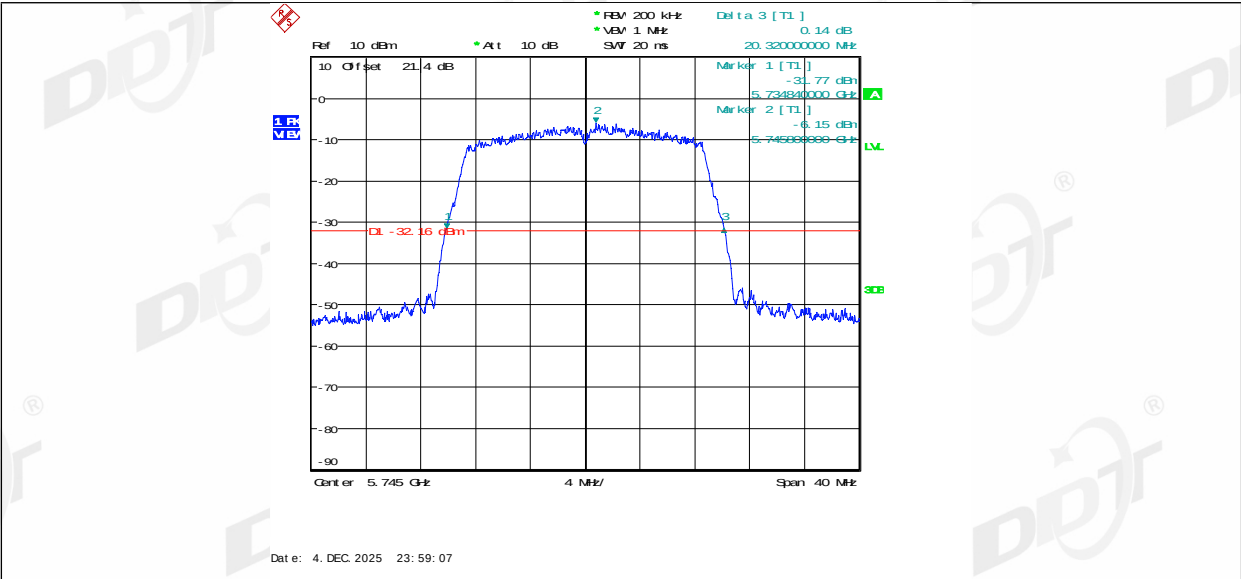


11AC20MIMO_Ant2_5745

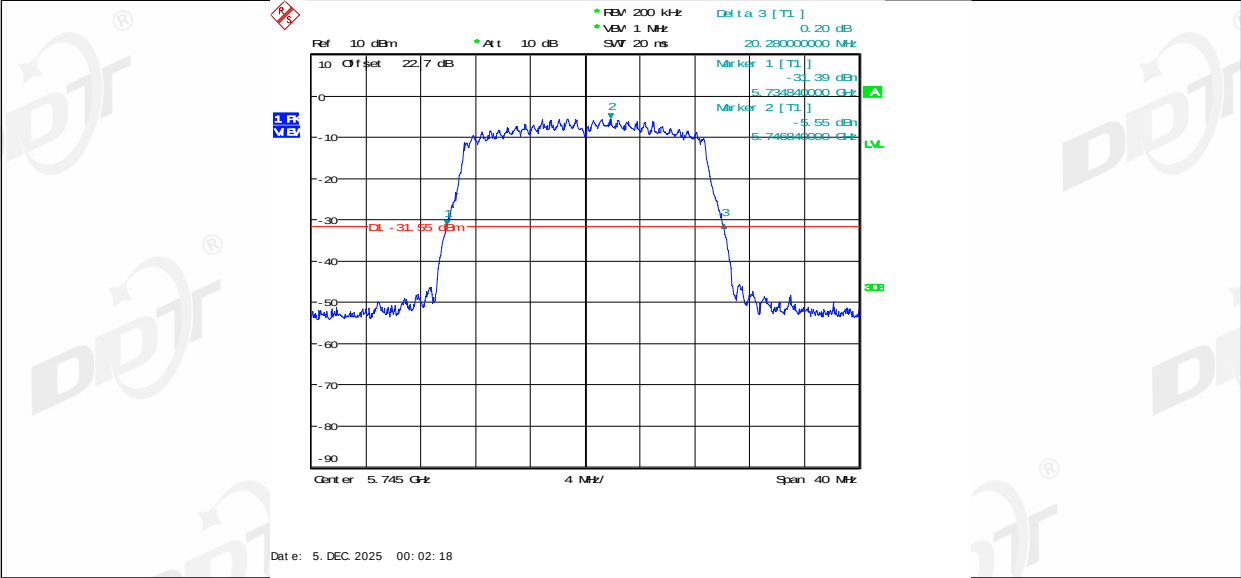


11AC20MIMO_Ant1_5785

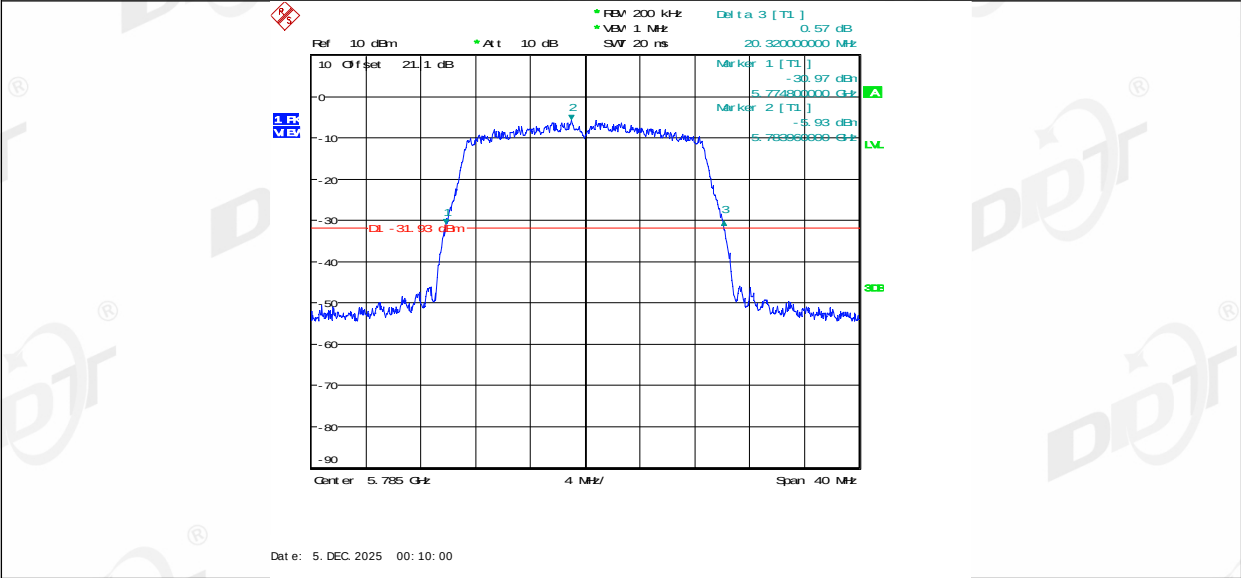


11AC20MIMO_Ant2_5785

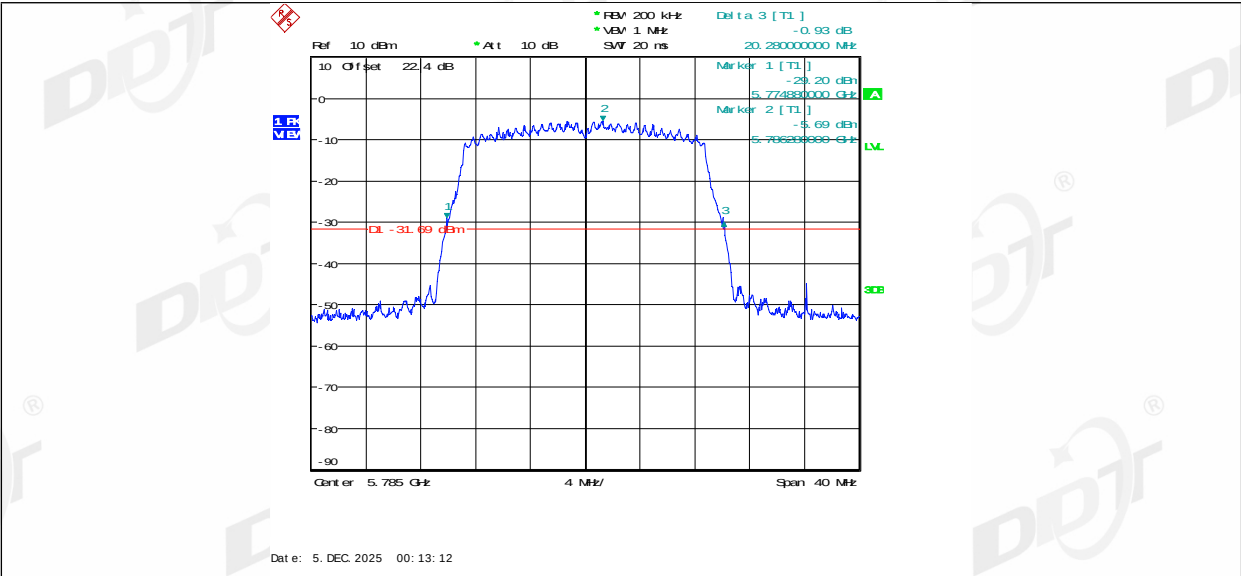


11AC20MIMO_Ant1_5825

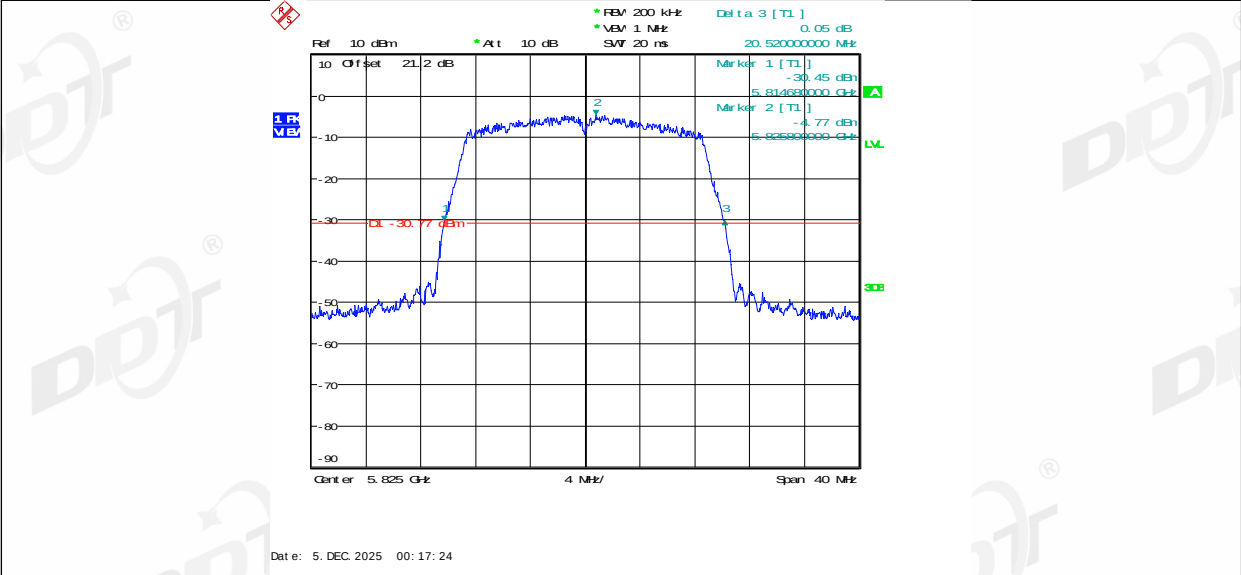


11AC20MIMO_Ant2_5825

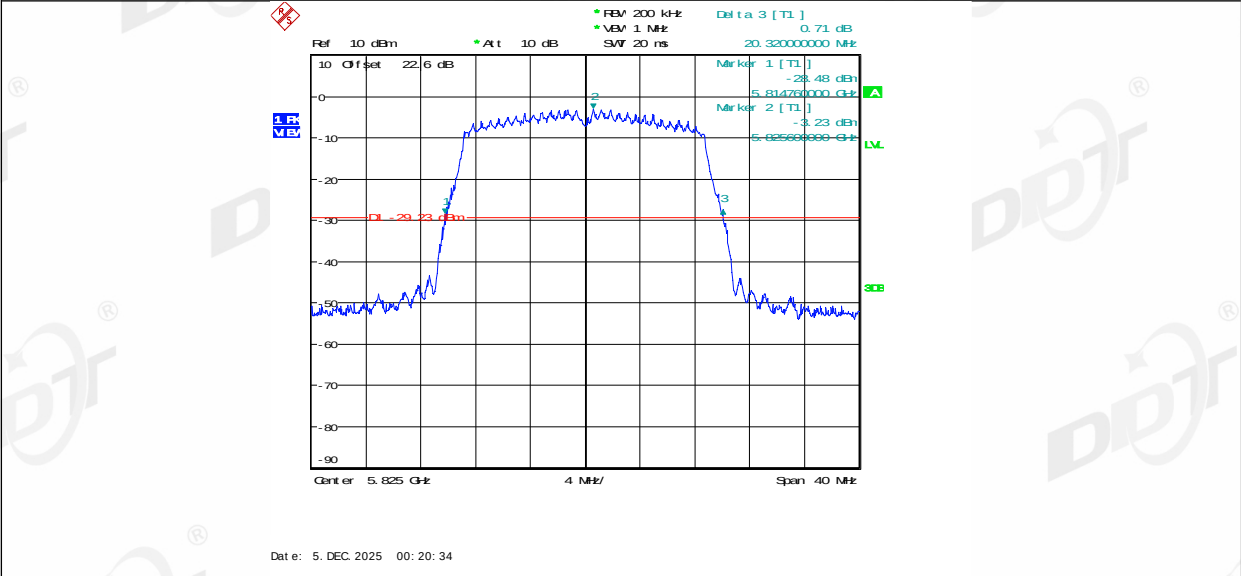


11AC40MIMO_Ant1_5190

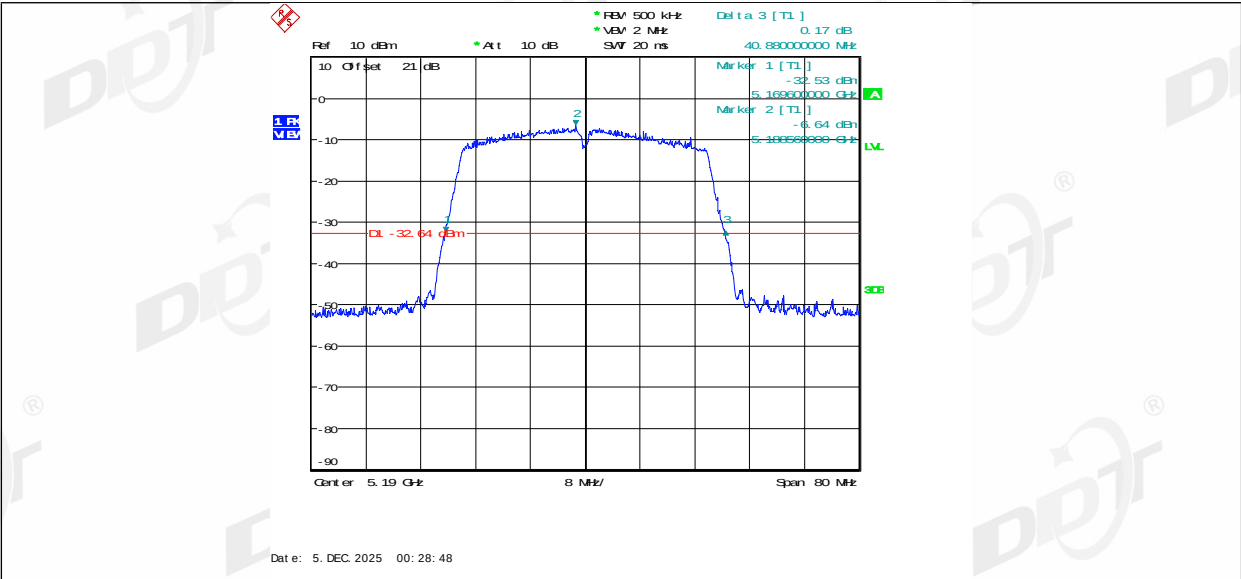




11AC40MIMO_Ant2_5190

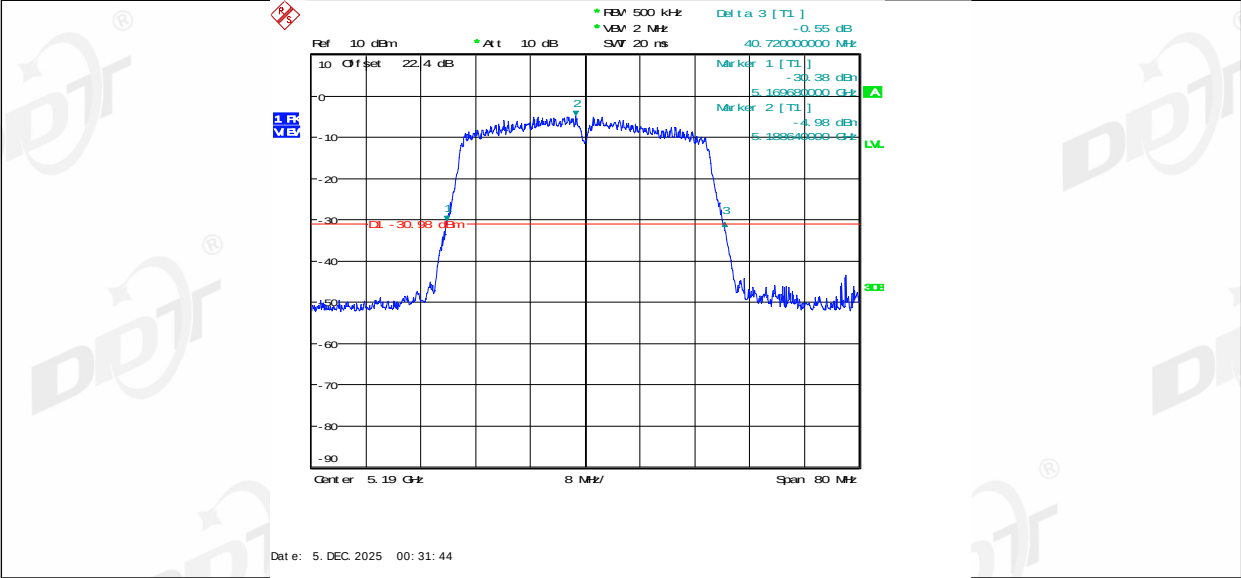


11AC40MIMO_Ant1_5230

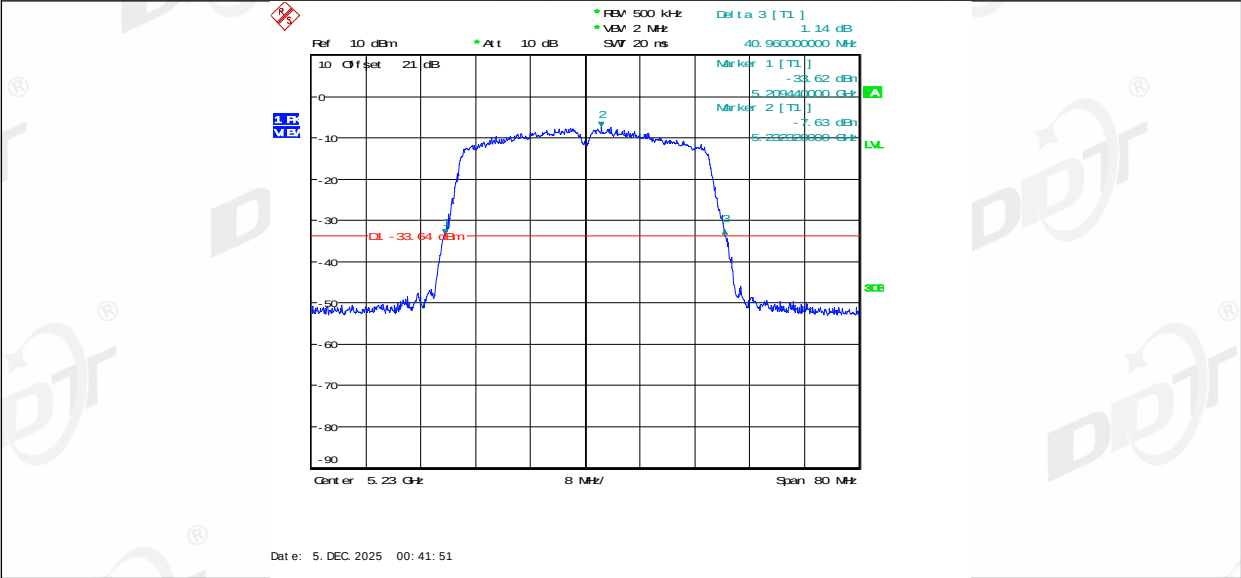


11AC40MIMO_Ant2_5230

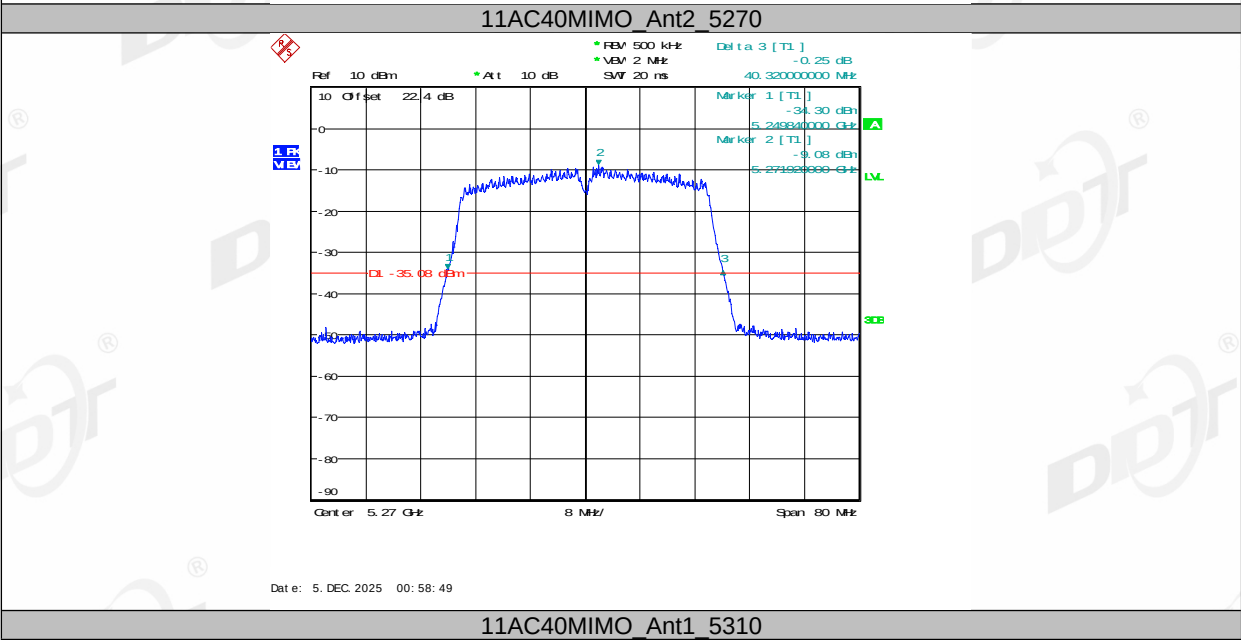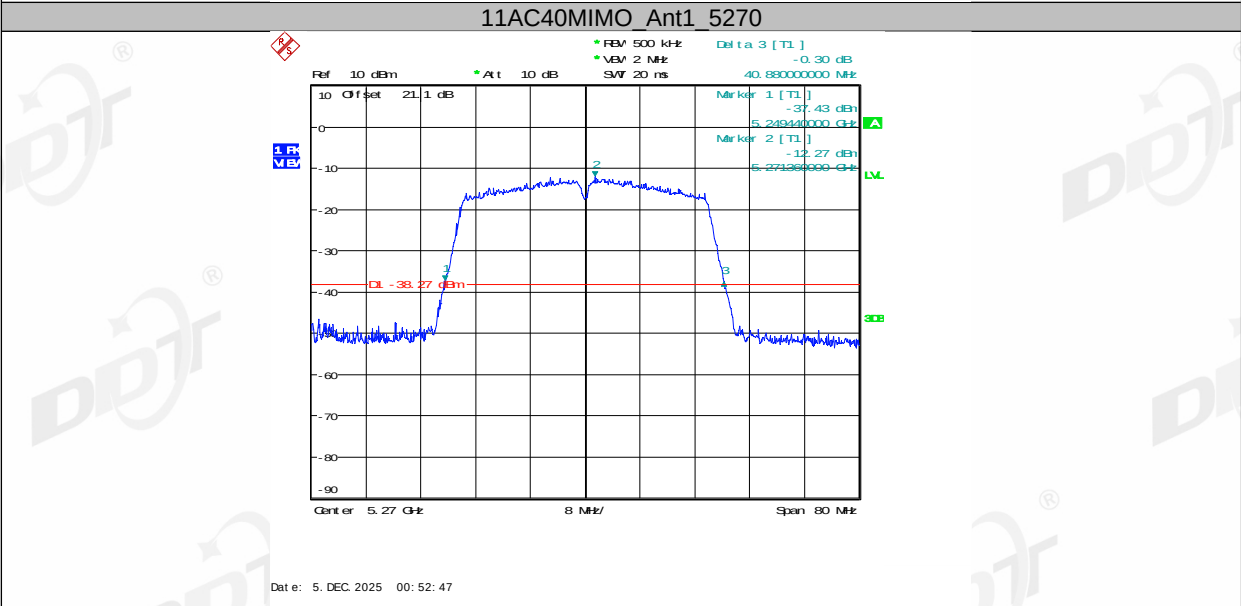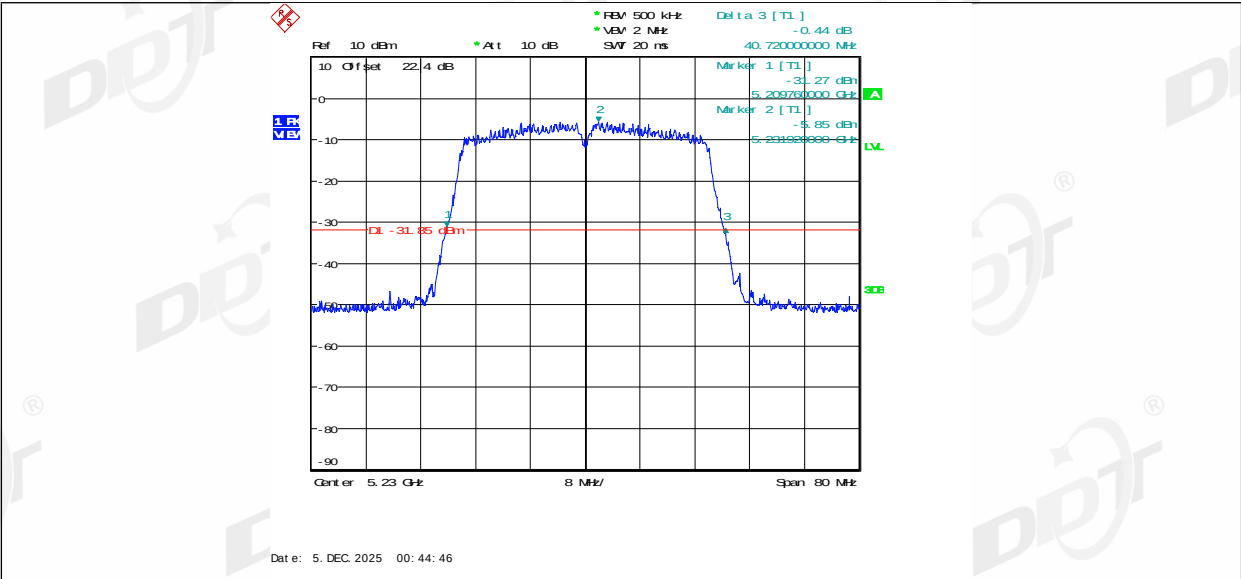


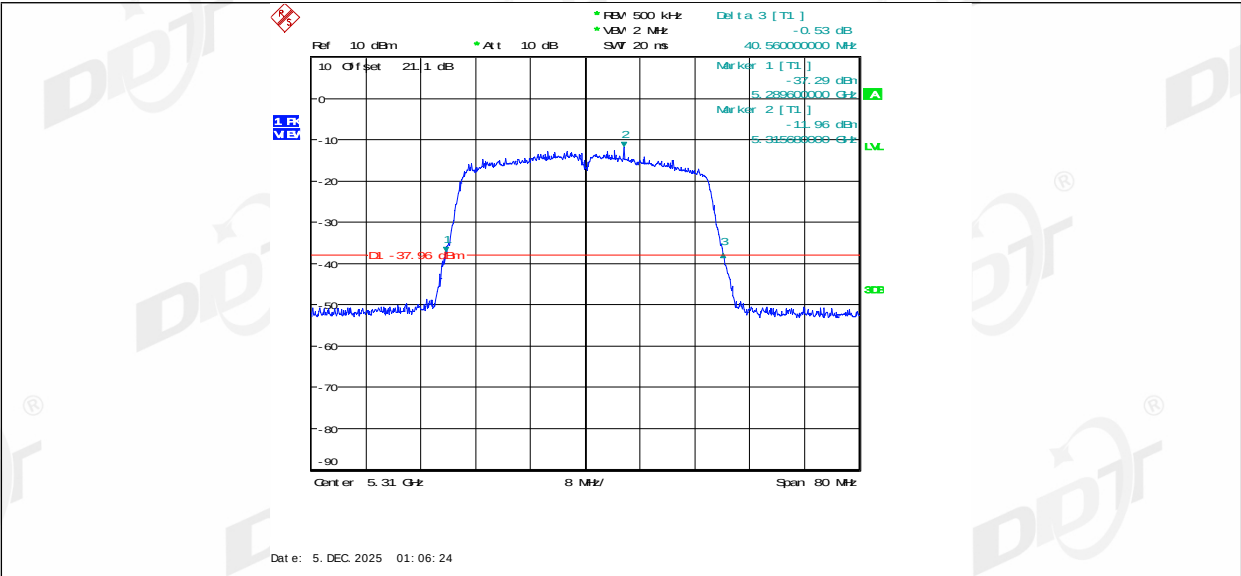


11AC40MIMO_Ant2_5310

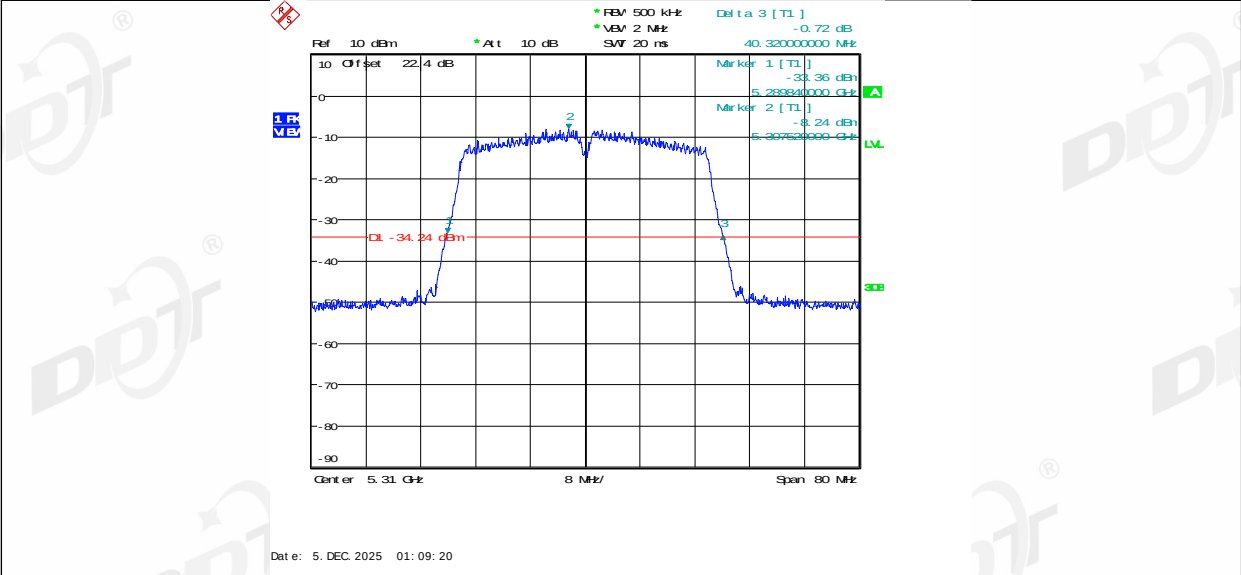


11AC40MIMO_Ant1_5510

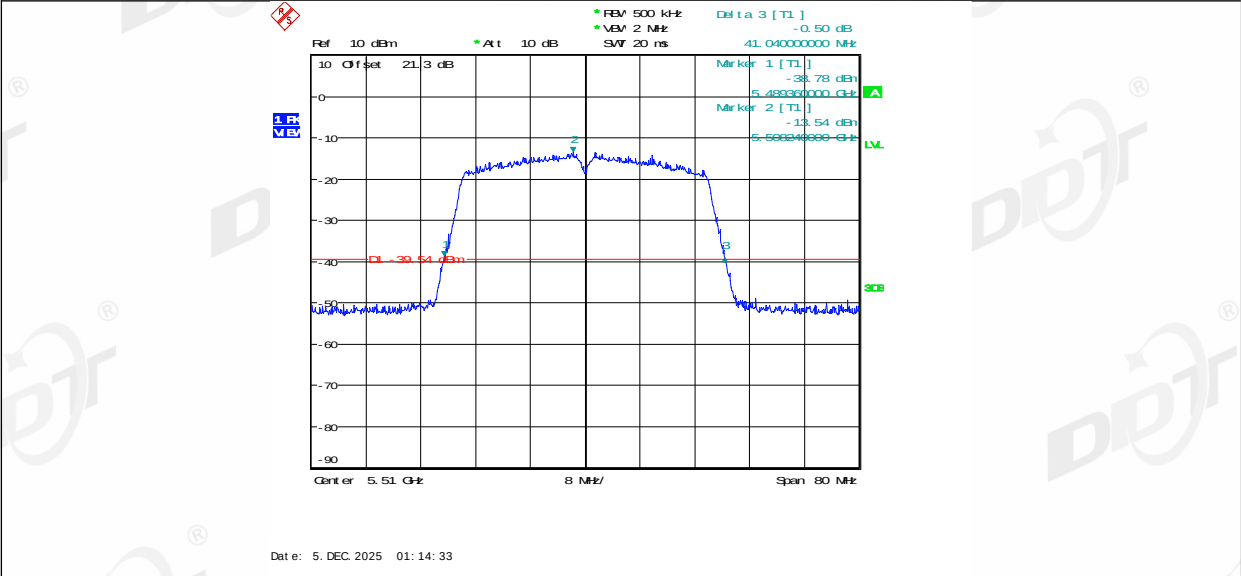


11AC40MIMO_Ant2_5510

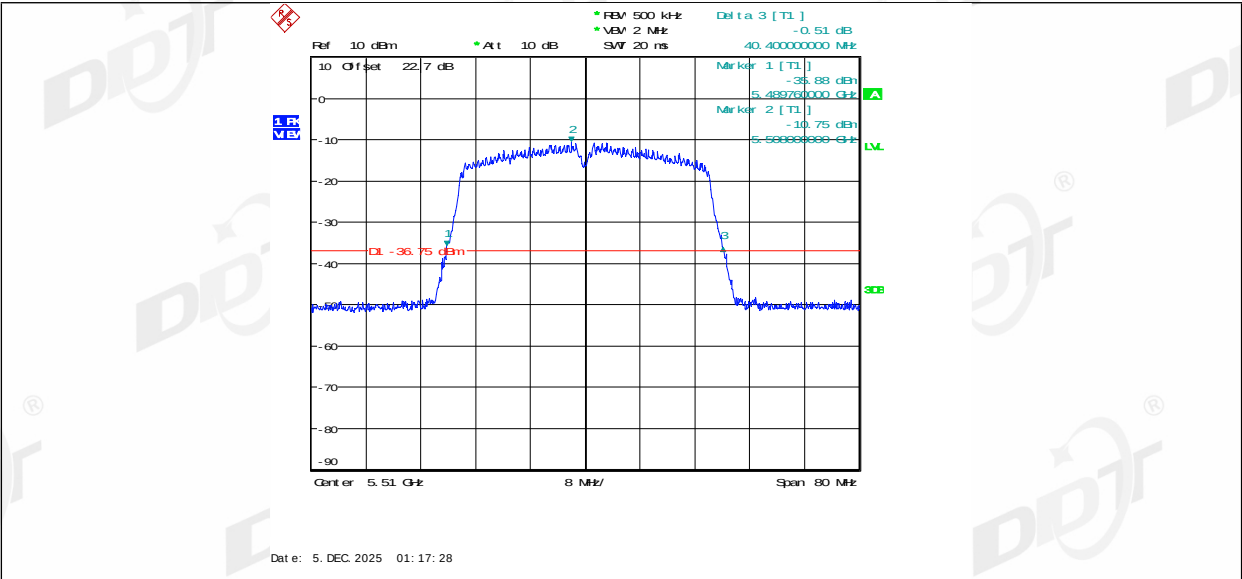


11AC40MIMO_Ant1_5550

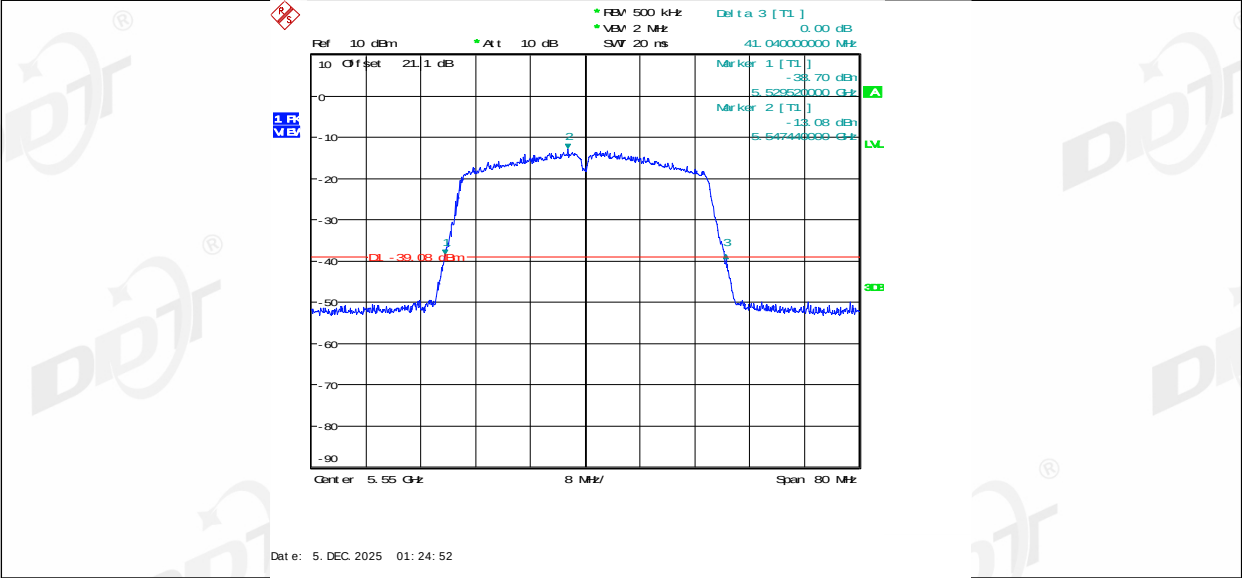


11AC40MIMO_Ant2_5550

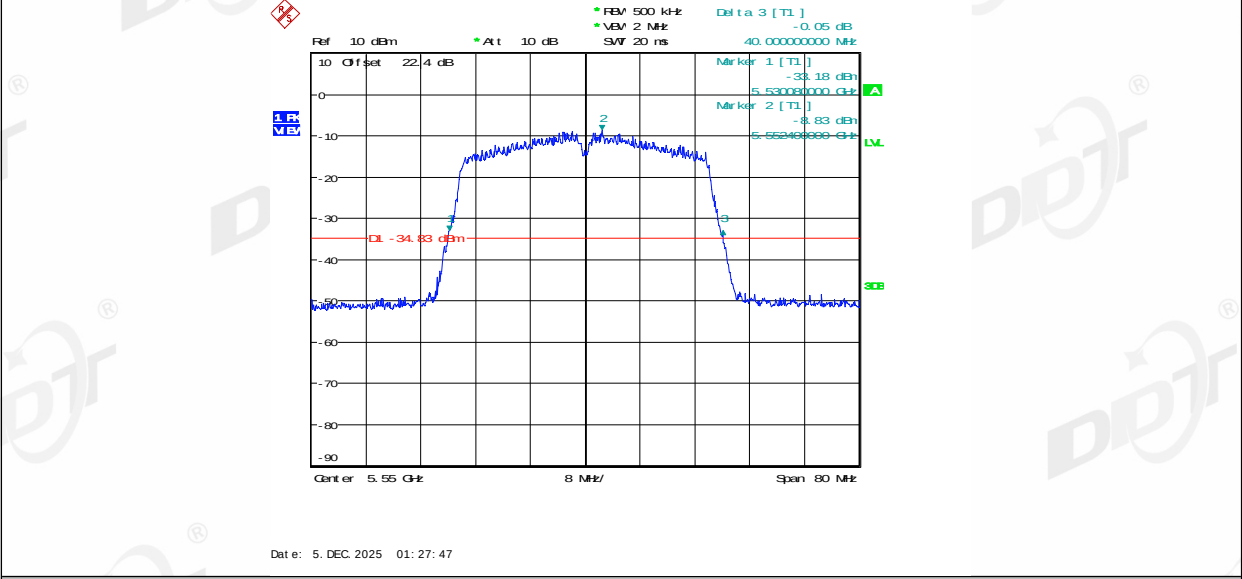


11AC40MIMO_Ant1_5670

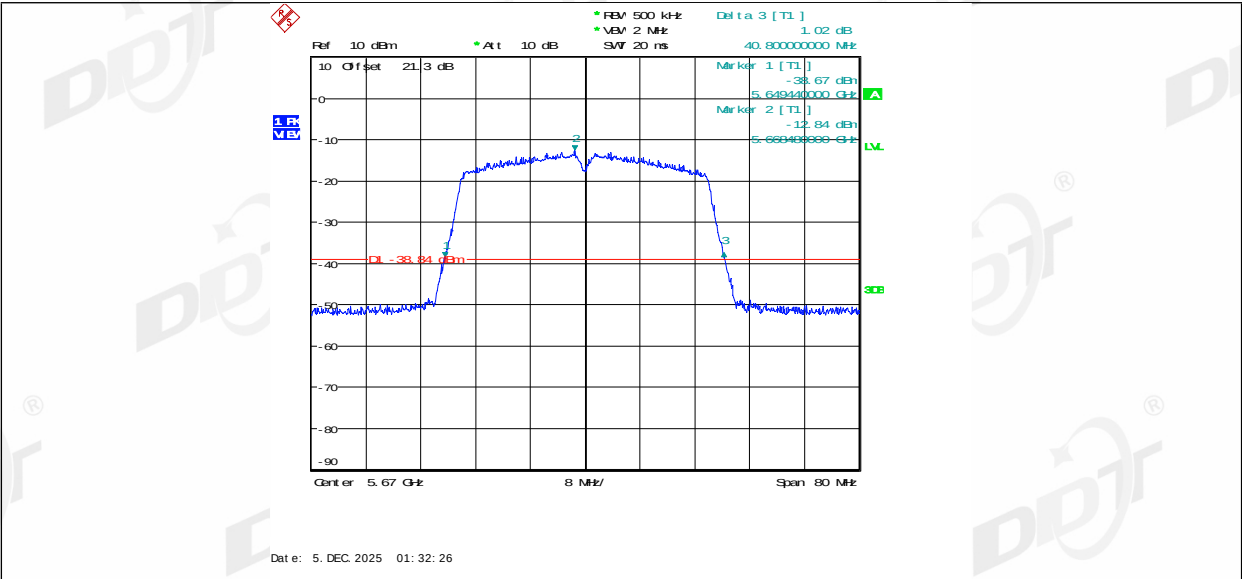


11AC40MIMO_Ant2_5670

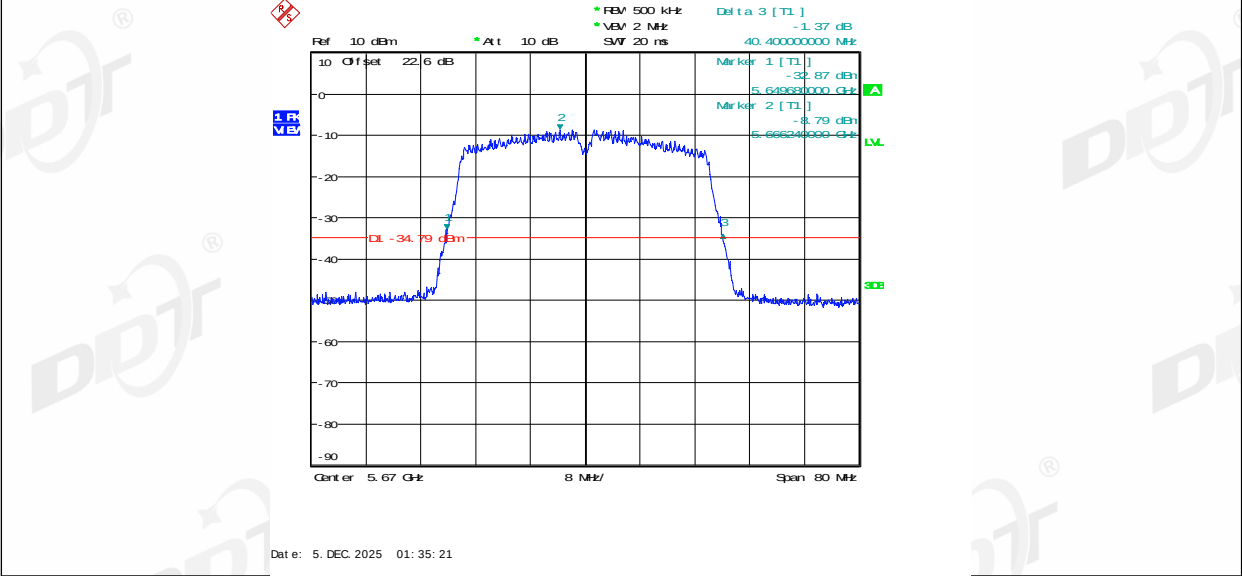


11AC40MIMO_Ant1_5755

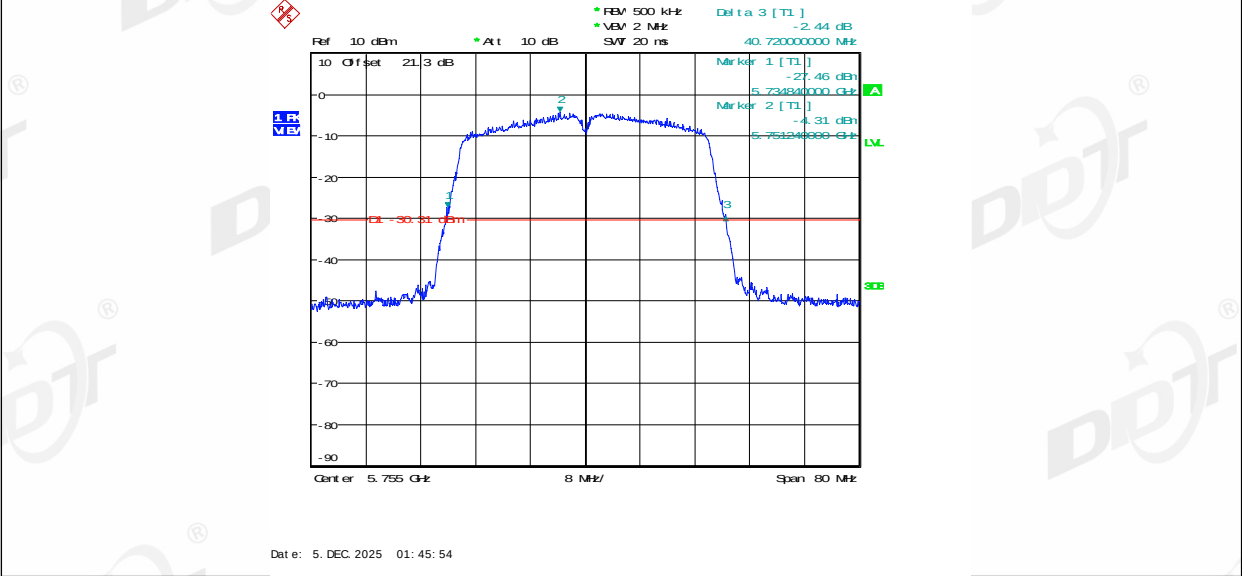


11AC40MIMO_Ant2_5755

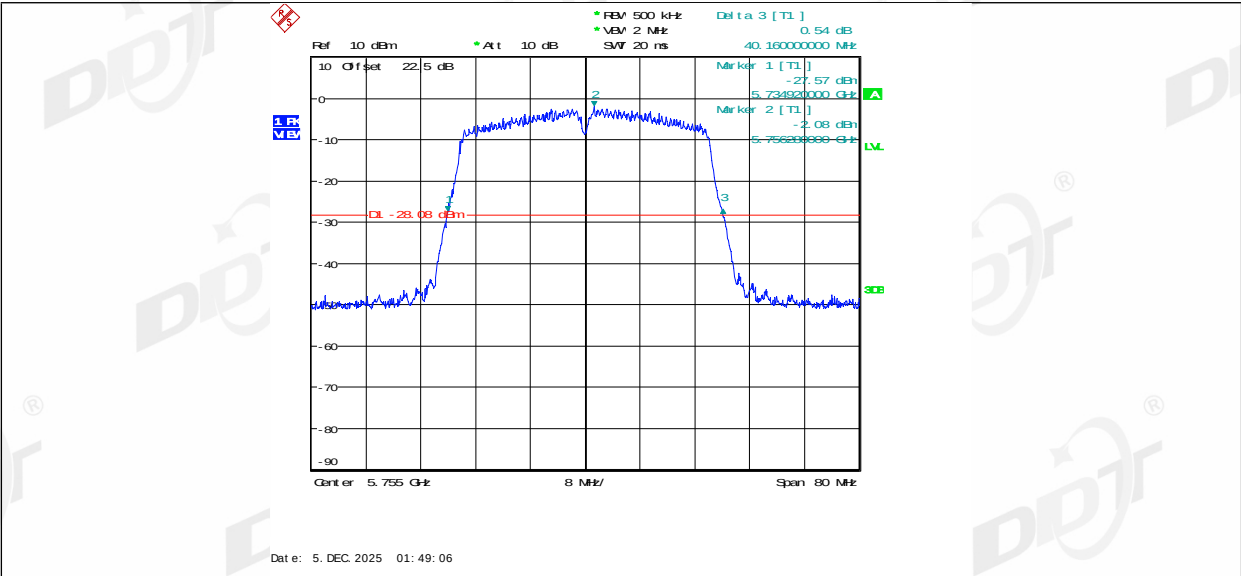


11AC40MIMO Ant1 5795

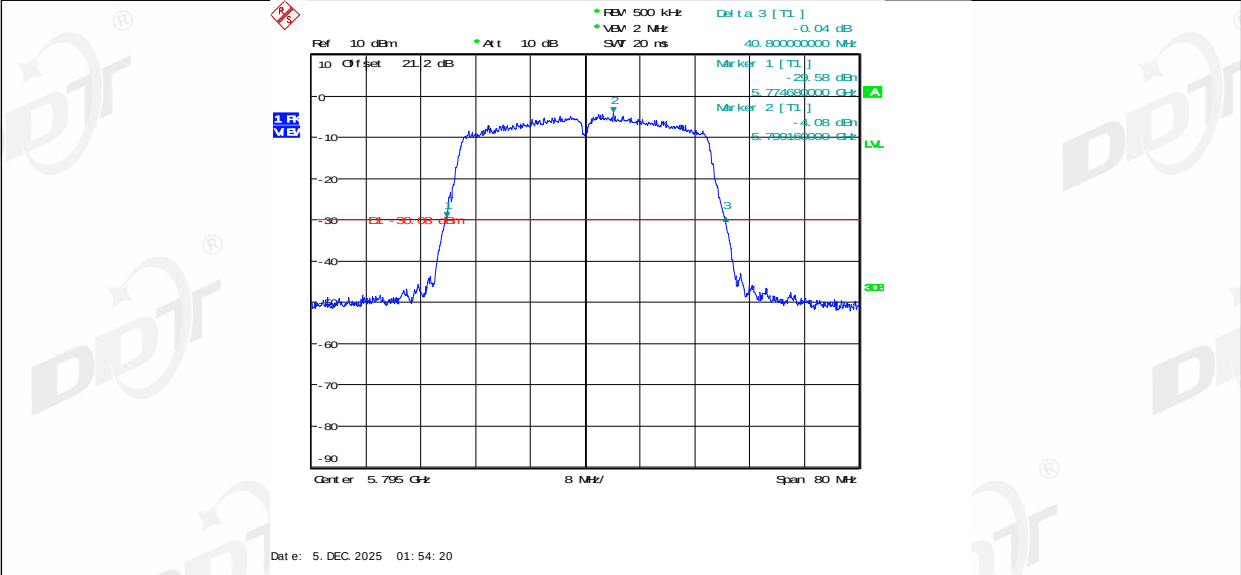


11AC40MIMO Ant2 5795

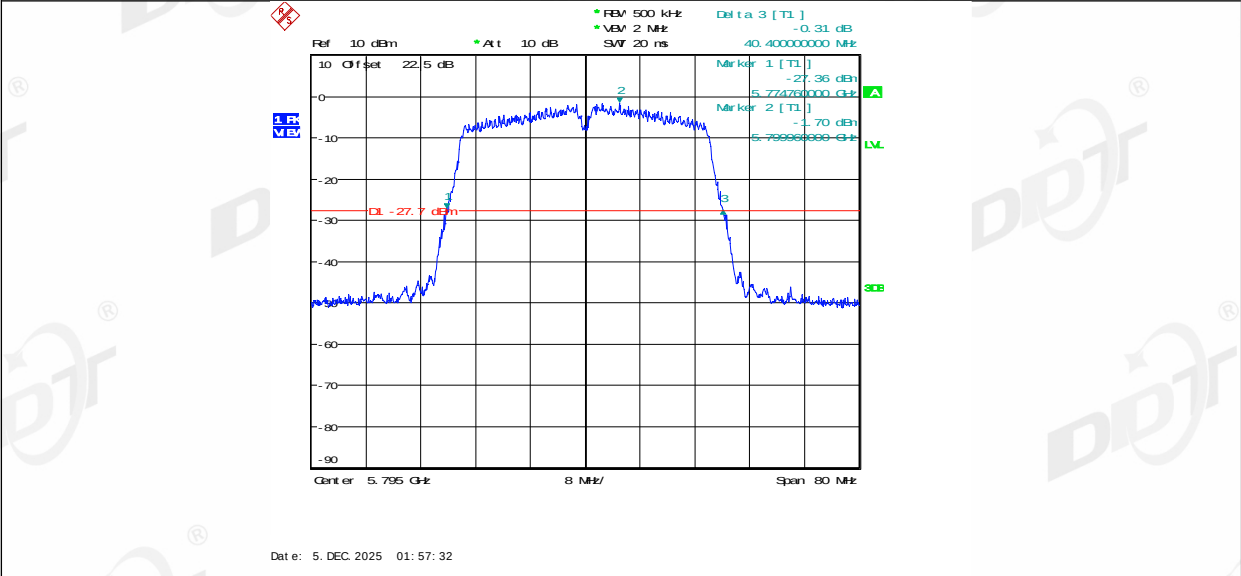


11AC80MIMO Ant1 5210

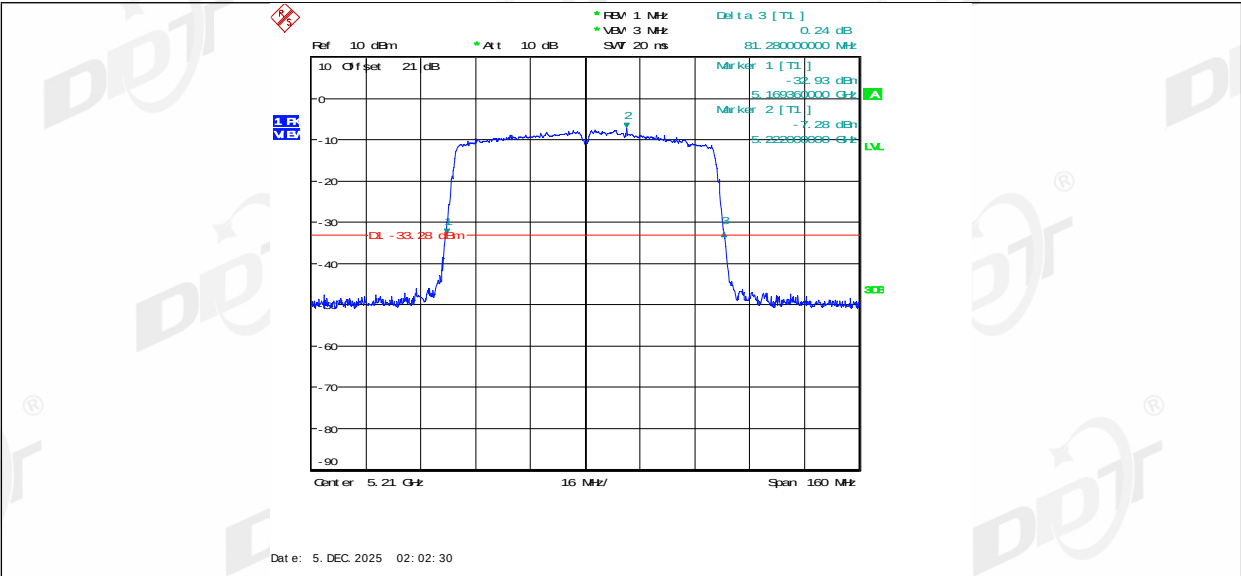


11AC80MIMO_Ant2_5210

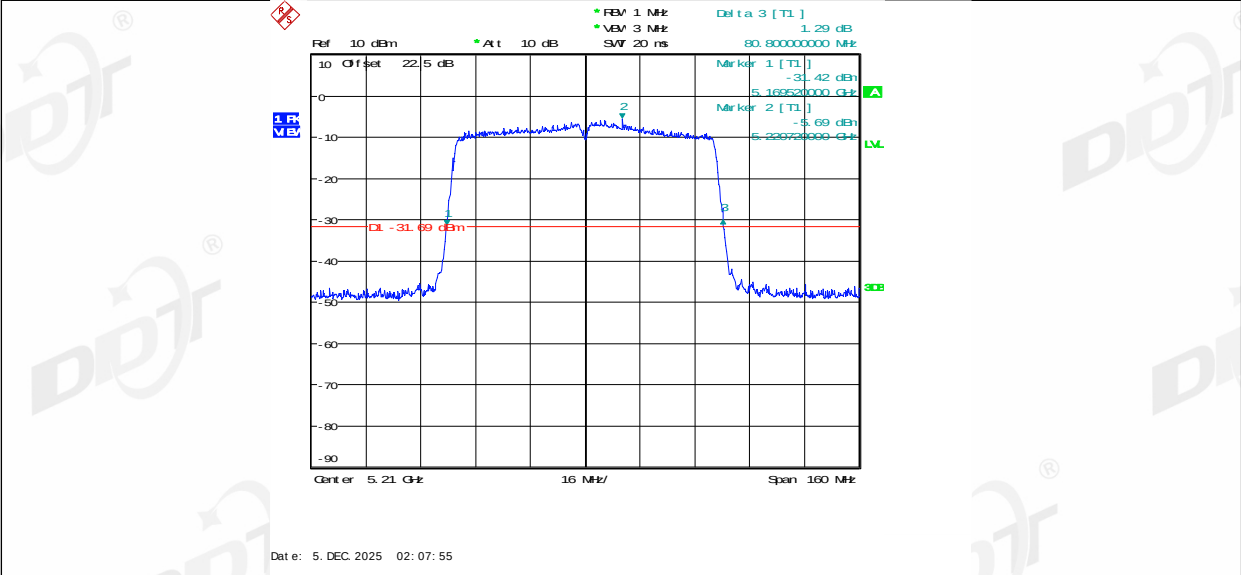


11AC80MIMO_Ant1_5290

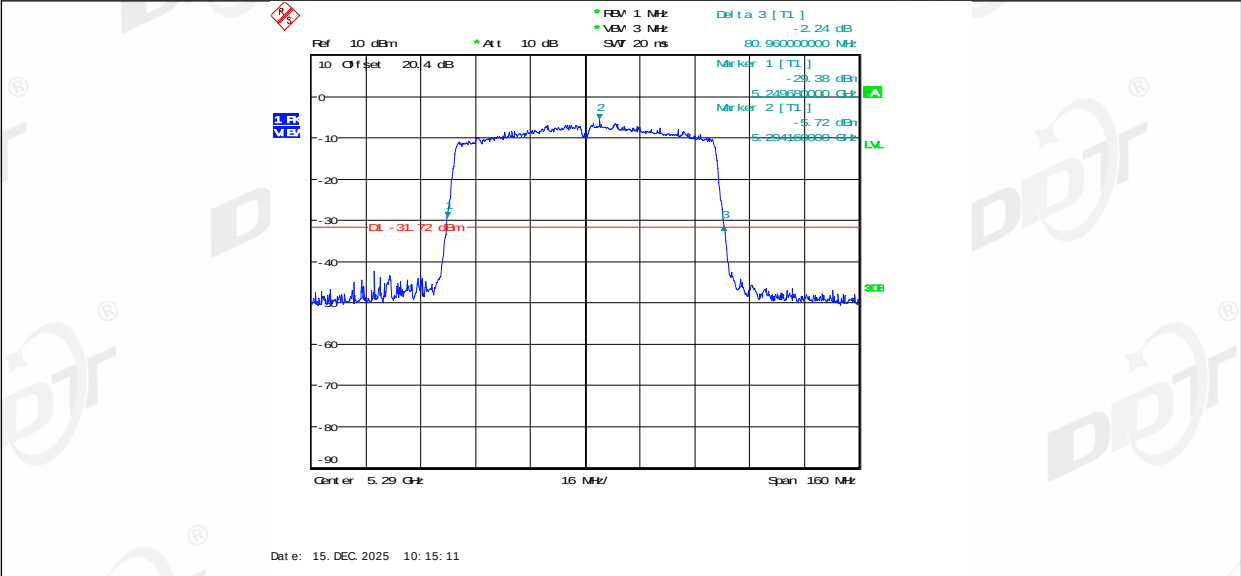


11AC80MIMO_Ant2_5290

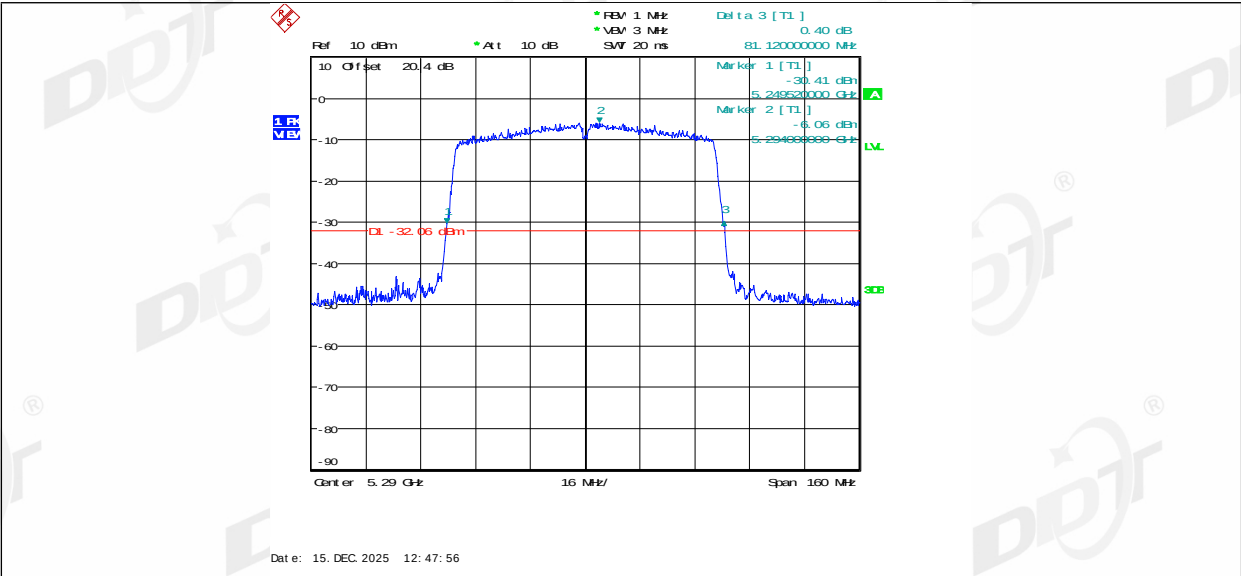


11AC80MIMO_Ant1_5530

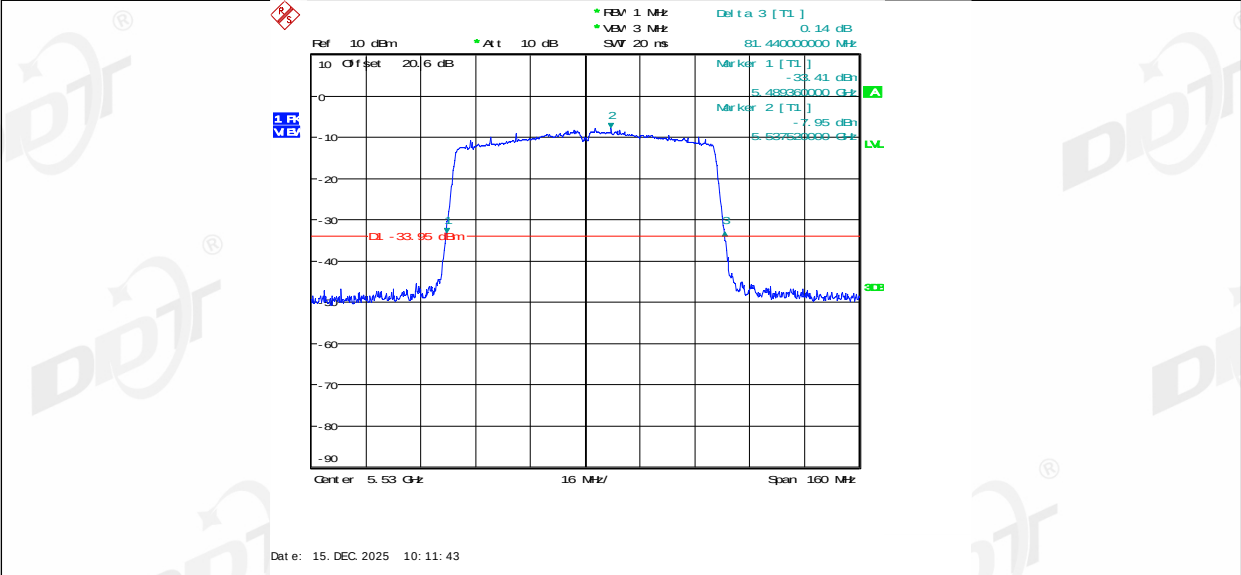


11AC80MIMO_Ant2_5530

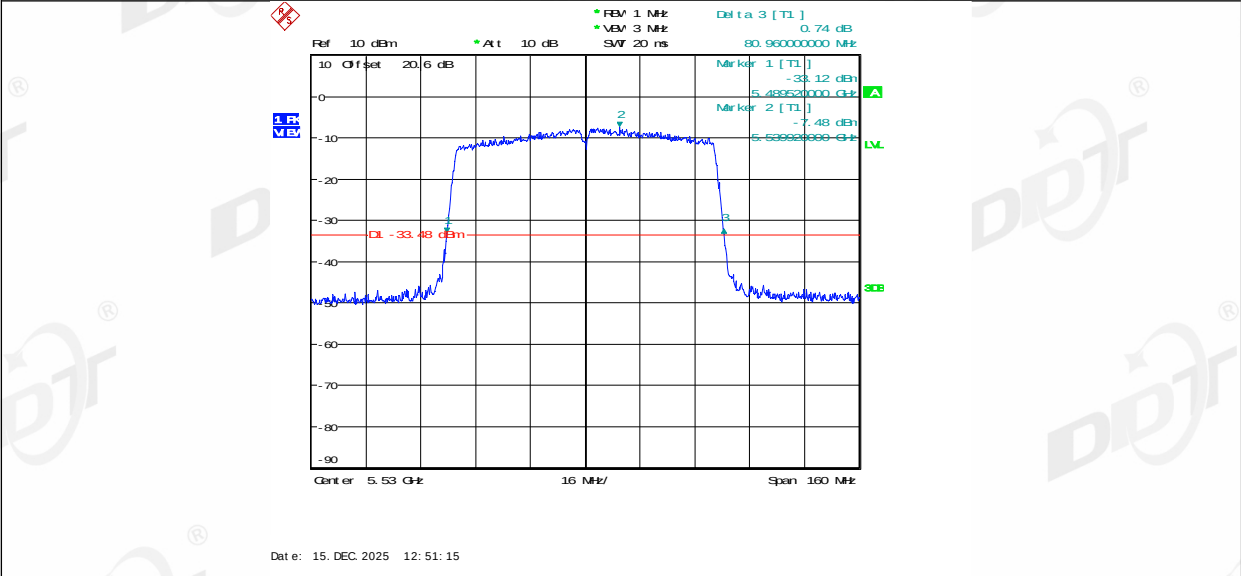


11AC80MIMO_Ant1_5610

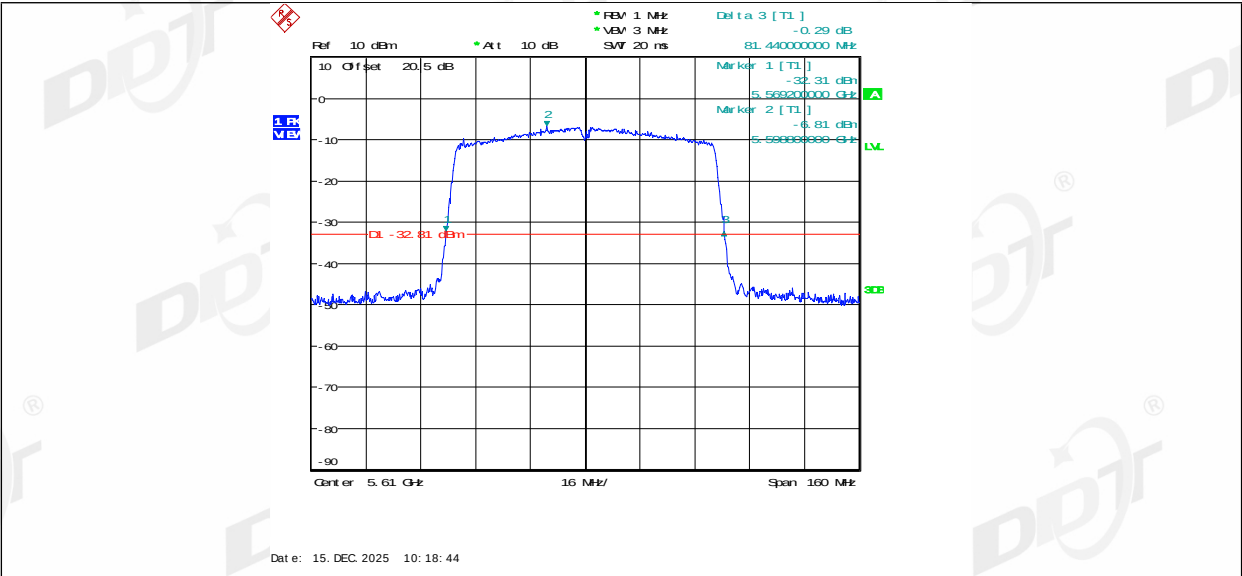


11AC80MIMO_Ant2_5610

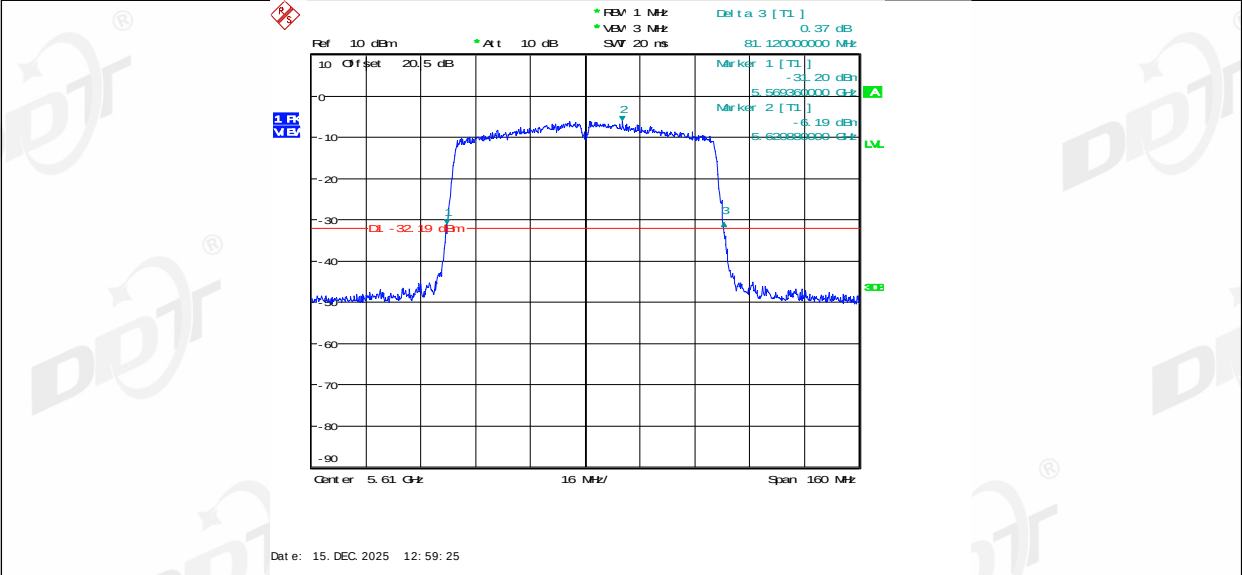

11AC80MIMO_Ant1_5775

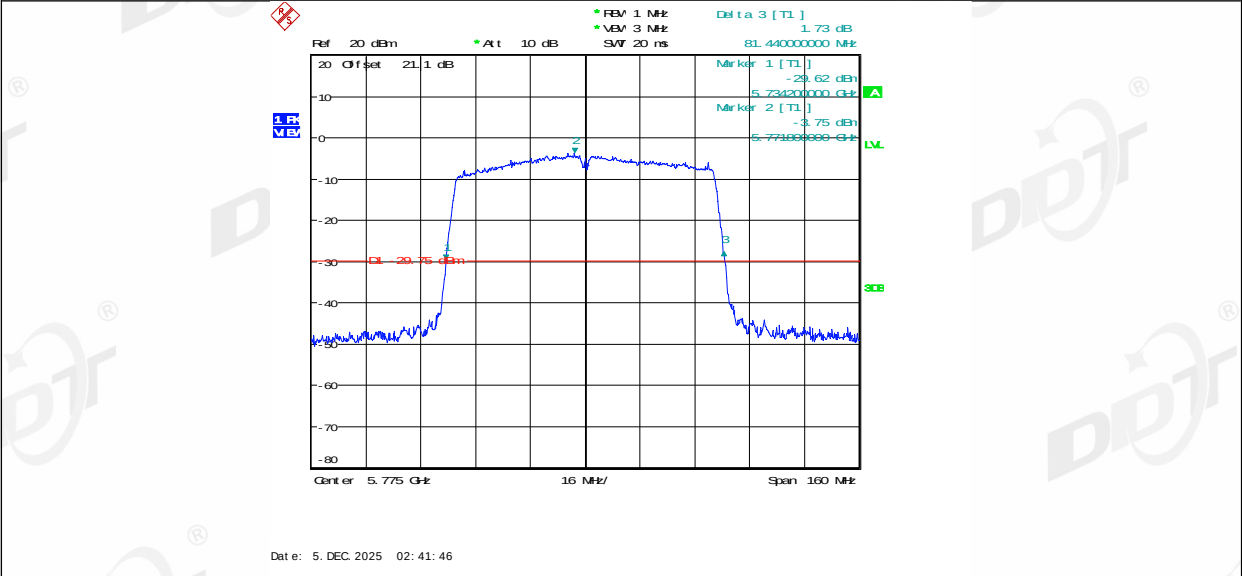


11AC80MIMO_Ant2_5775

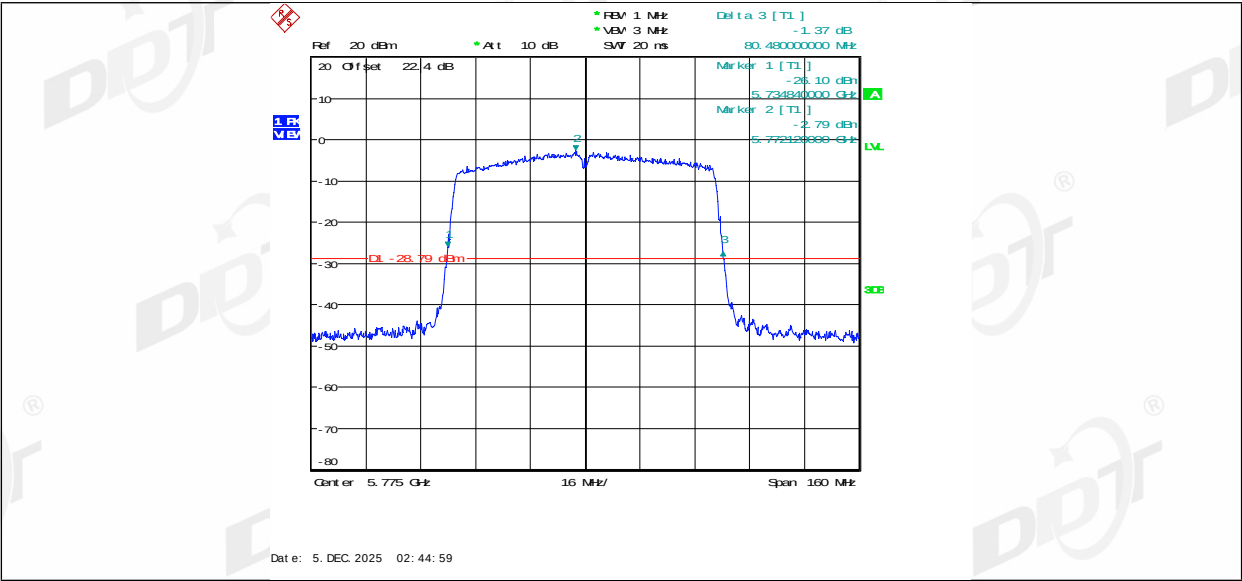

5. 6dB Bandwidth

5.1. Block diagram of test setup

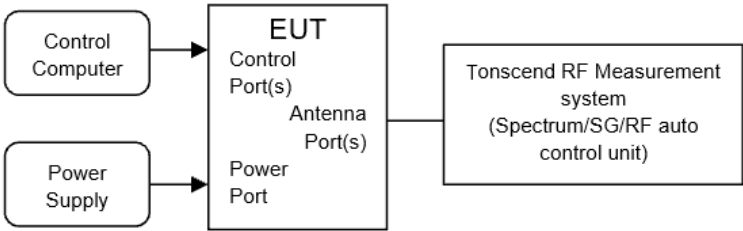

5.2. Limits

FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
6 dB Bandwidth	Minimum 500 kHz	5725 - 5850

5.3. Test procedure

Connect EUT's antenna output to spectrum analyzer by RF cable.

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth: RBW=100 kHz For 26 dB Bandwidth: approximately 1% of the emission bandwidth.
VBW	For 6 dB Bandwidth: VBW=300 kHz For 26 dB Bandwidth: >3 RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.




5.4. Test result B4


Test Engineer:	Wayne Huang	Test Site:	RF Measurement System 1#
Ambient Condition:	24.9℃,46.1%RH	Test Date:	2025.12.01-2025.12.17
Test Power Supply:	PoE Input 24V,0.5A	Sample Number:	S25092317-001

Test Mode	Antenna	Frequency[MHz]	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	15.12	5737.40	5752.52	0.5	PASS
	Ant2	5745	15.12	5737.40	5752.52	0.5	PASS
	Ant1	5785	15.08	5777.44	5792.52	0.5	PASS
	Ant2	5785	15.12	5777.40	5792.52	0.5	PASS
	Ant1	5825	15.52	5817.20	5832.72	0.5	PASS
	Ant2	5825	15.08	5817.44	5832.52	0.5	PASS
11N20MIMO	Ant1	5745	15.12	5737.40	5752.52	0.5	PASS
	Ant2	5745	15.72	5737.40	5753.12	0.5	PASS
	Ant1	5785	15.12	5777.40	5792.52	0.5	PASS
	Ant2	5785	16.28	5776.84	5793.12	0.5	PASS
	Ant1	5825	15.12	5817.40	5832.52	0.5	PASS
	Ant2	5825	16.28	5816.80	5833.08	0.5	PASS
11N40MIMO	Ant1	5755	35.12	5737.40	5772.52	0.5	PASS
	Ant2	5755	35.12	5737.40	5772.52	0.5	PASS
	Ant1	5795	35.12	5777.40	5812.52	0.5	PASS
	Ant2	5795	35.12	5777.40	5812.52	0.5	PASS
11AC20MIMO	Ant1	5745	15.32	5737.40	5752.72	0.5	PASS
	Ant2	5745	16.84	5736.84	5753.68	0.5	PASS
	Ant1	5785	15.32	5777.20	5792.52	0.5	PASS
	Ant2	5785	16.88	5776.84	5793.72	0.5	PASS
	Ant1	5825	15.12	5817.40	5832.52	0.5	PASS
	Ant2	5825	16.32	5816.20	5832.52	0.5	PASS
11AC40MIMO	Ant1	5755	35.12	5737.40	5772.52	0.5	PASS
	Ant2	5755	35.12	5737.40	5772.52	0.5	PASS
	Ant1	5795	35.12	5777.40	5812.52	0.5	PASS
	Ant2	5795	35.12	5777.40	5812.52	0.5	PASS
11AC80MIMO	Ant1	5775	75.20	5737.40	5812.60	0.5	PASS
	Ant2	5775	75.20	5737.40	5812.60	0.5	PASS


5.5. Test graphs B4






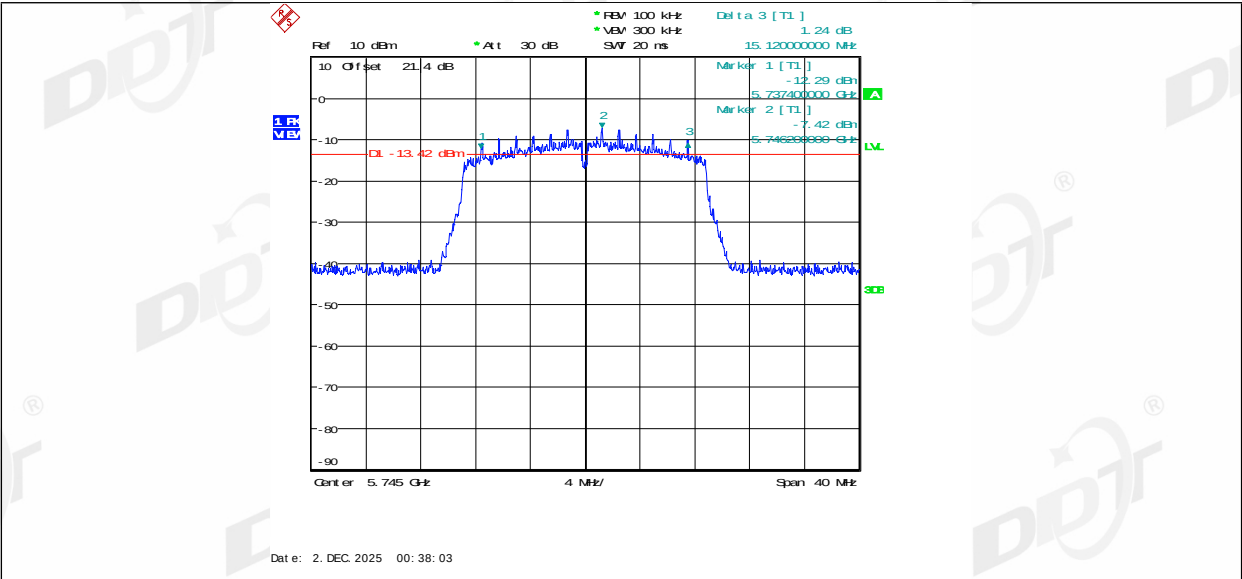


11N20MIMO_Ant2_5745

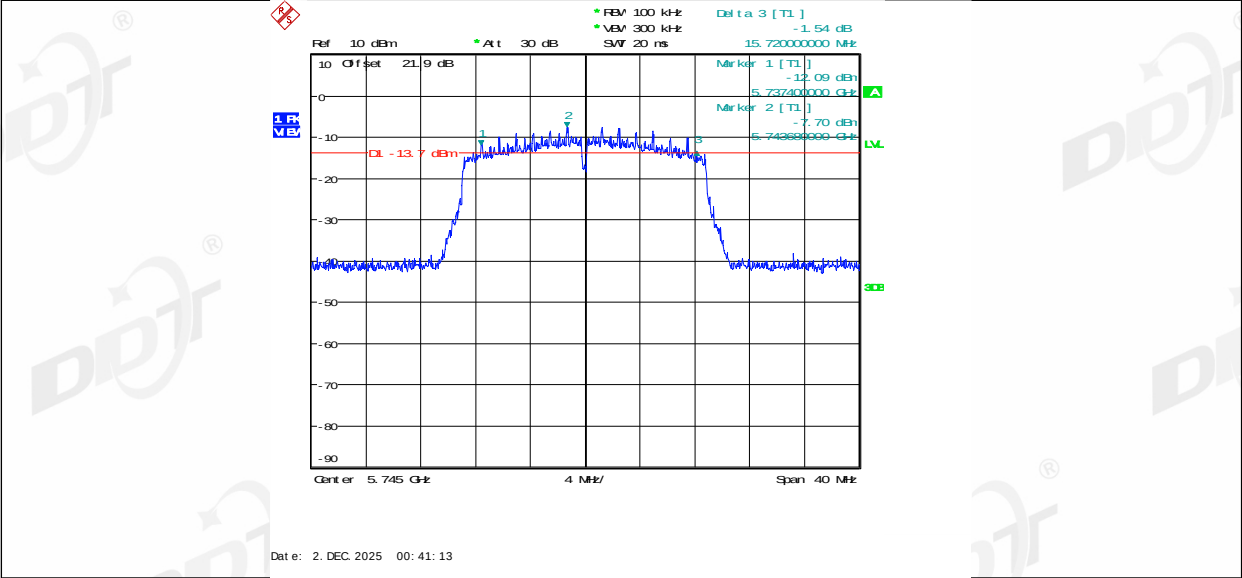


11N20MIMO_Ant1_5785

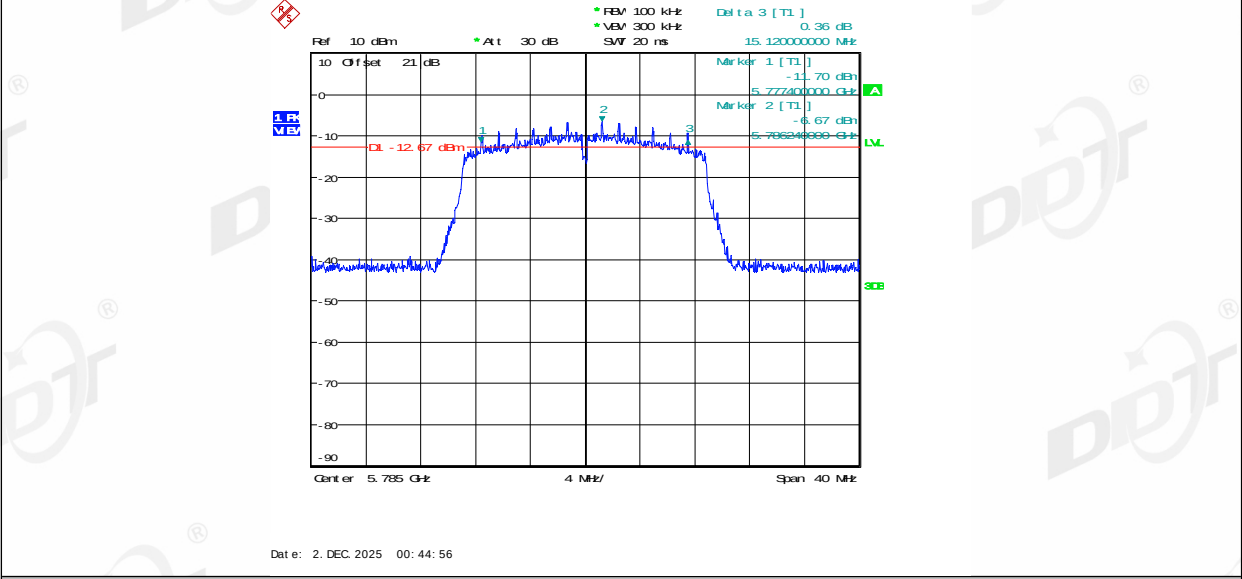


11N20MIMO_Ant2_5785

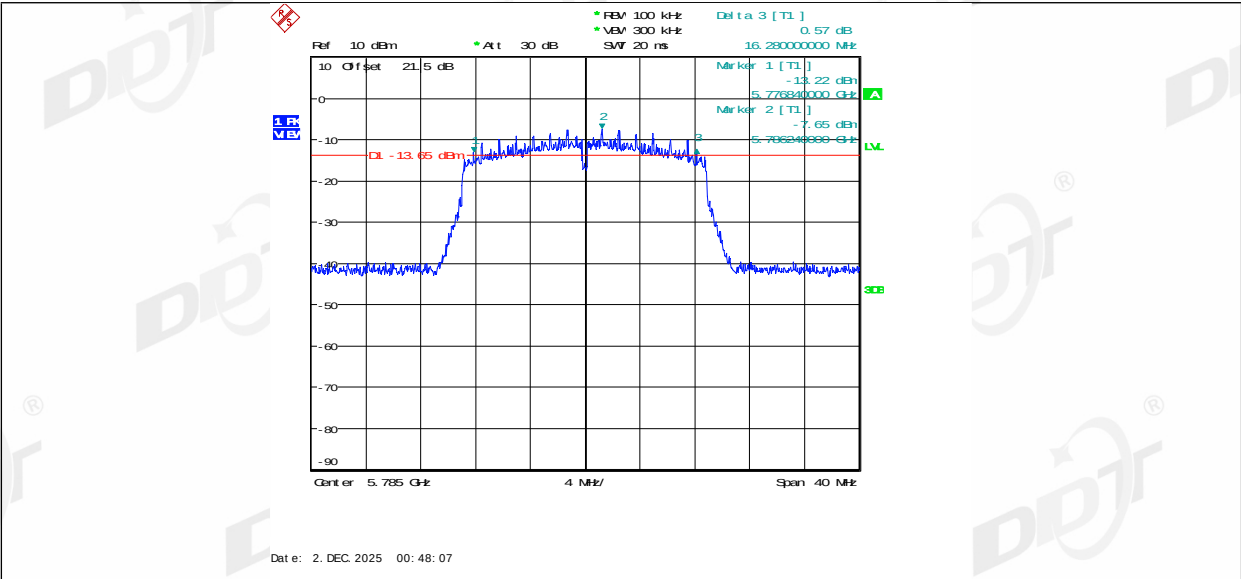


11N20MIMO_Ant1_5825

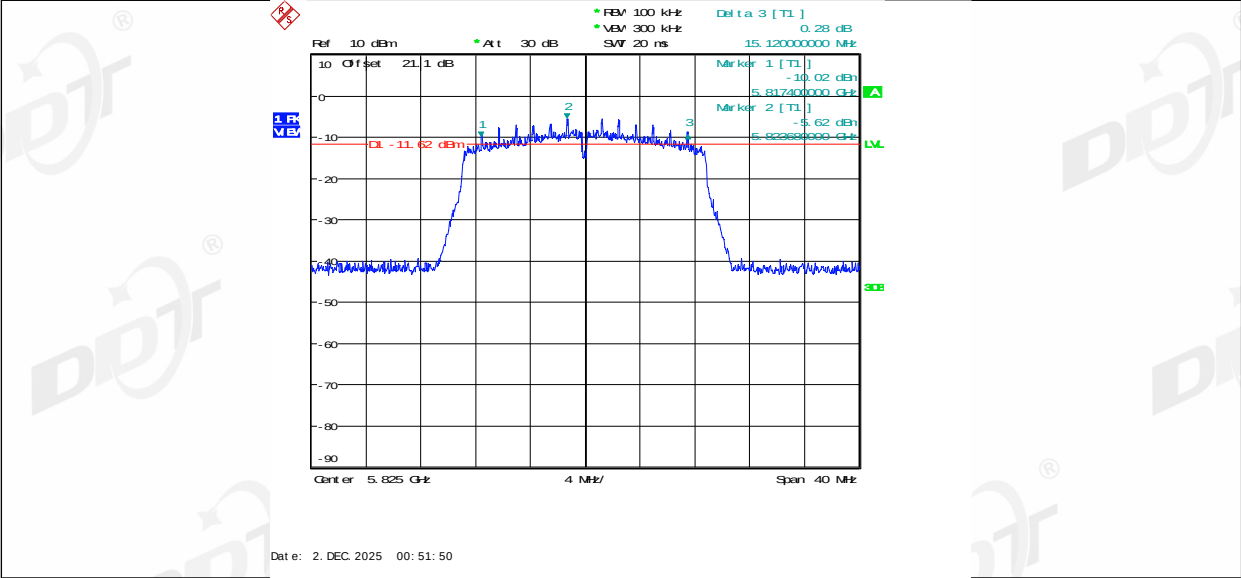


11N20MIMO_Ant2_5825

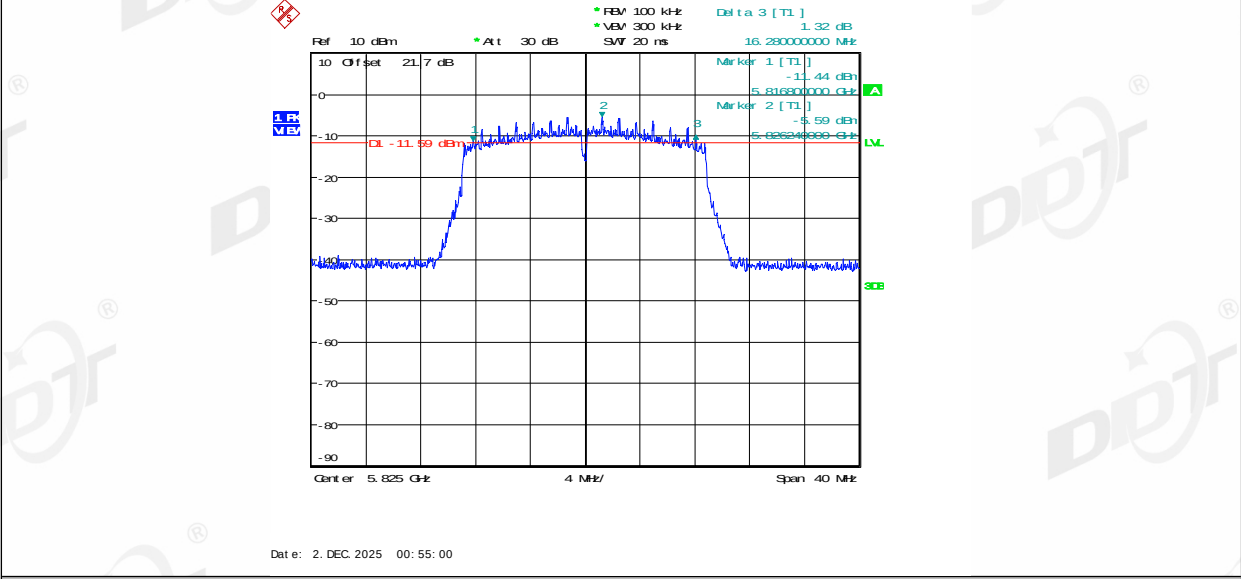


11N40MIMO_Ant1_5755

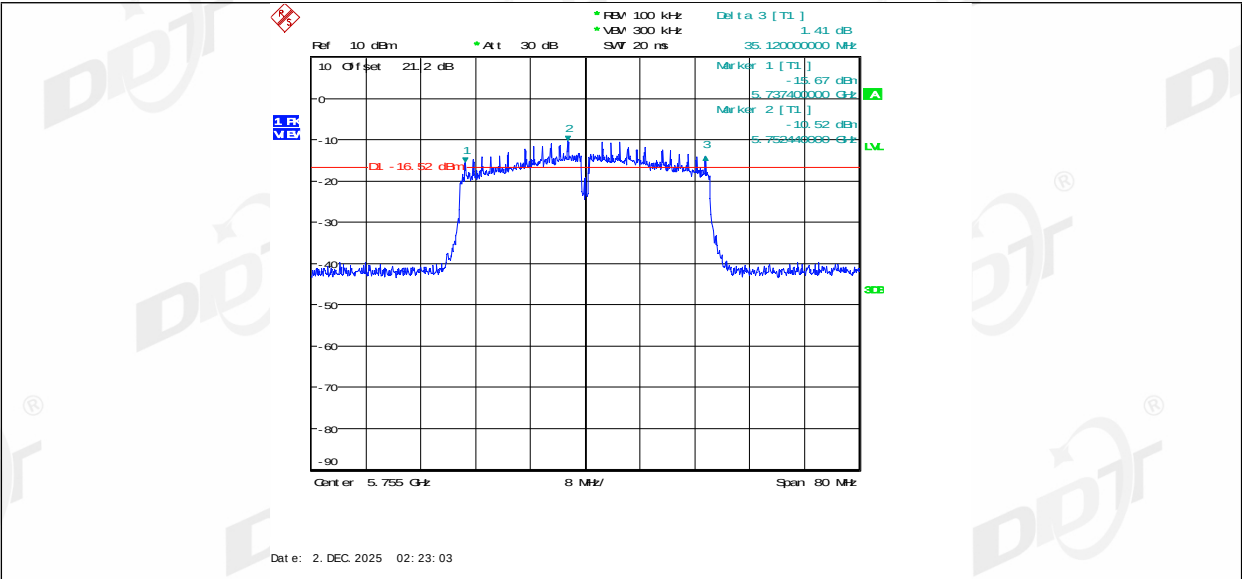


11N40MIMO_Ant2_5755

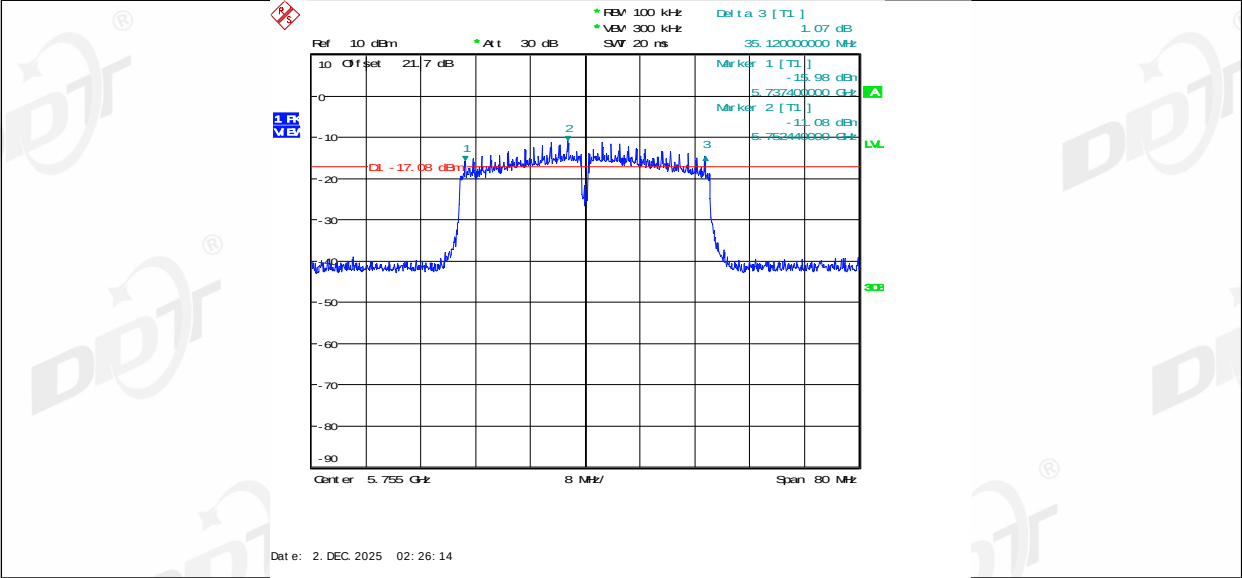


11N40MIMO_Ant1_5795

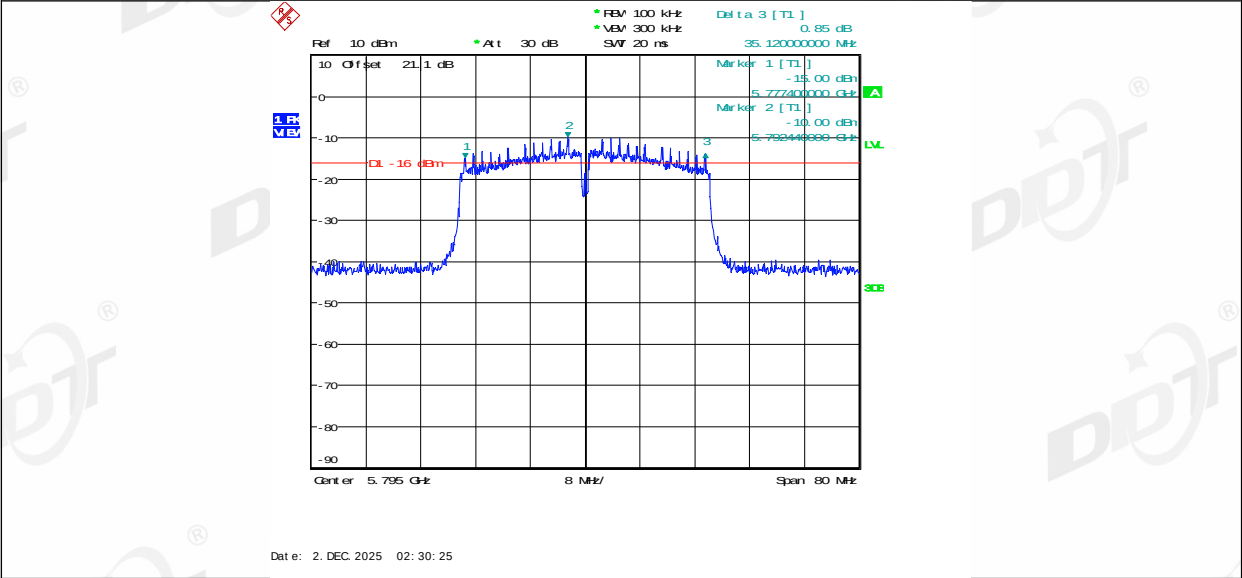


11N40MIMO_Ant2_5795

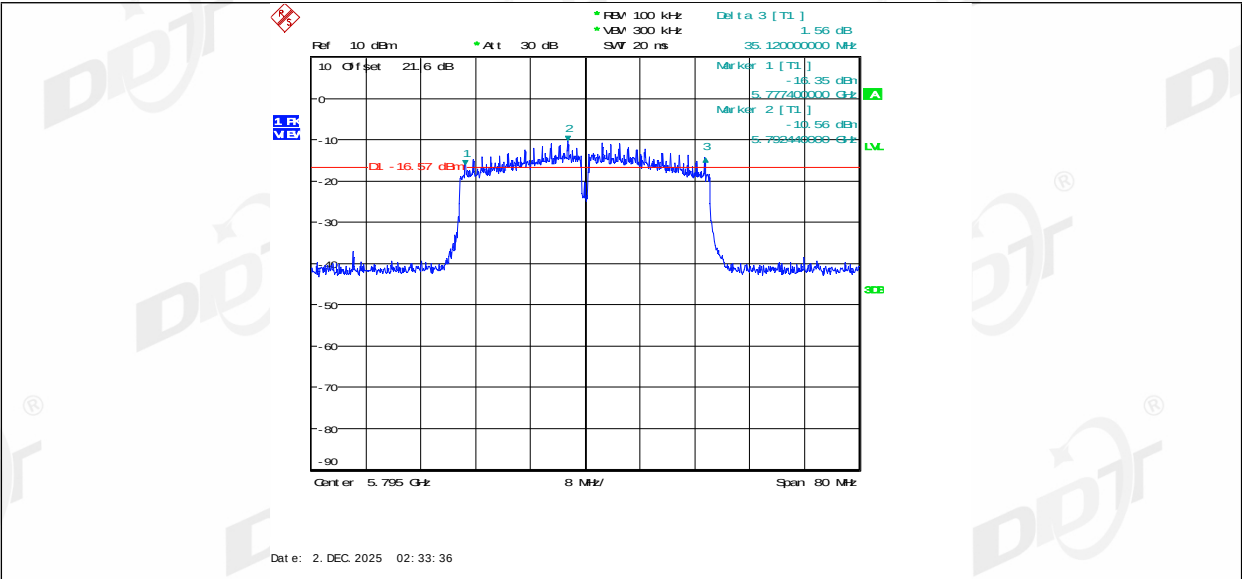


11AC20MIMO_Ant1_5745

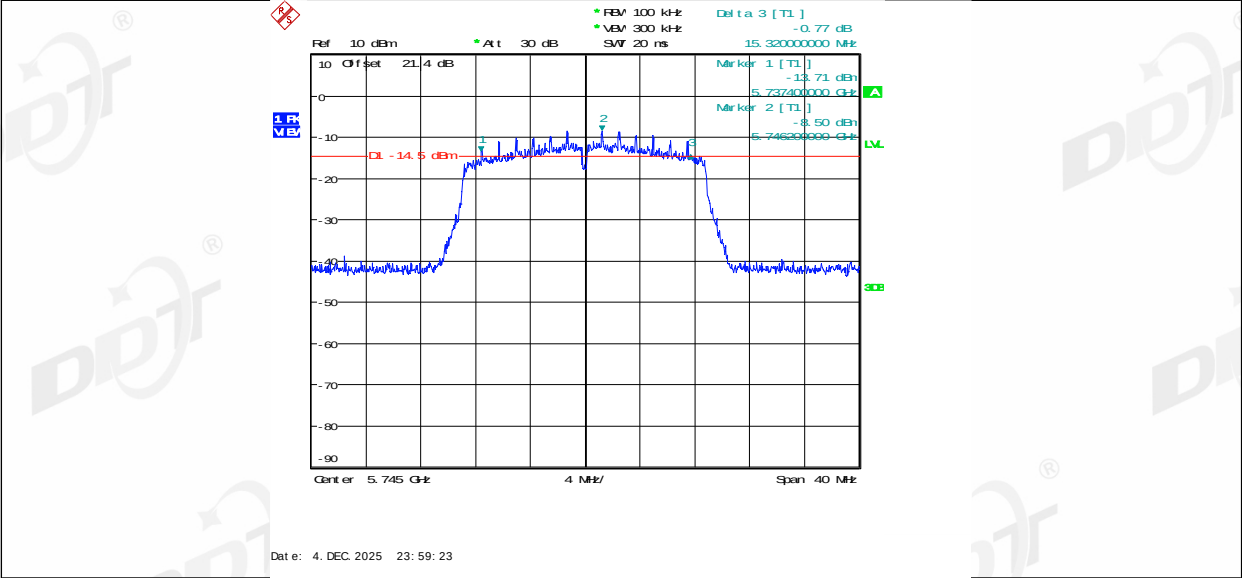


11AC20MIMO_Ant2_5745

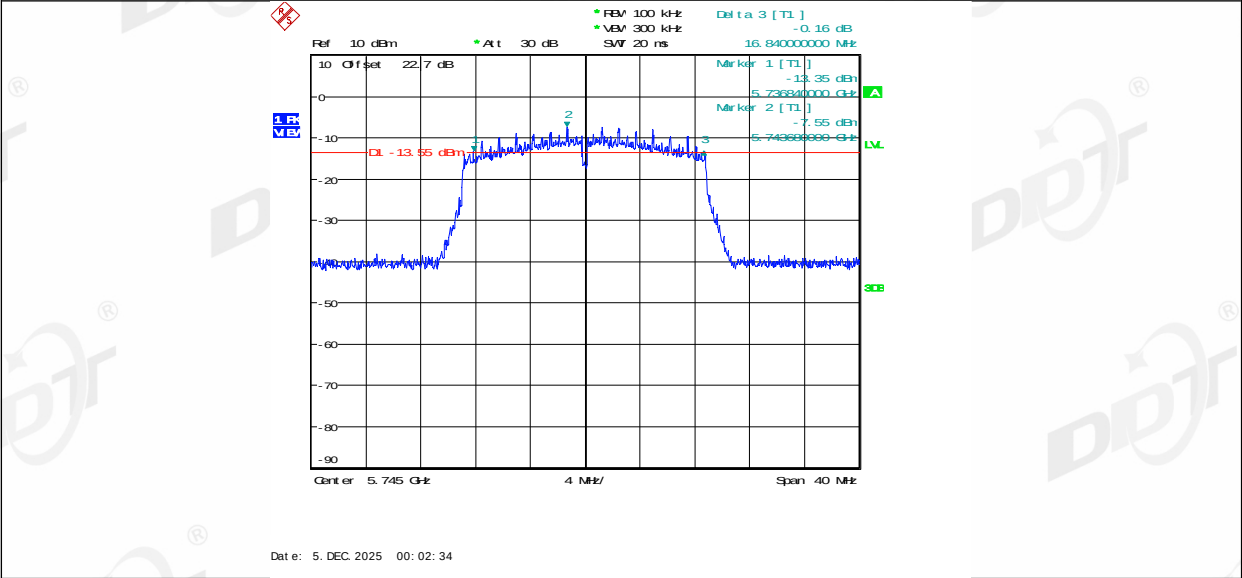


11AC20MIMO_Ant1_5785

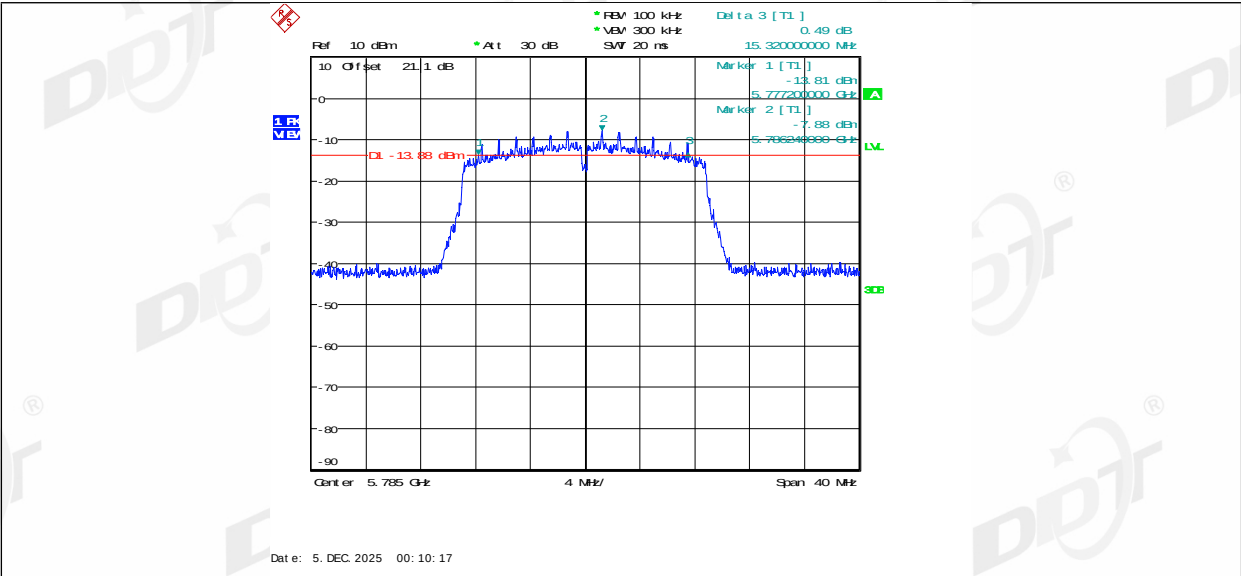


11AC20MIMO_Ant2_5785

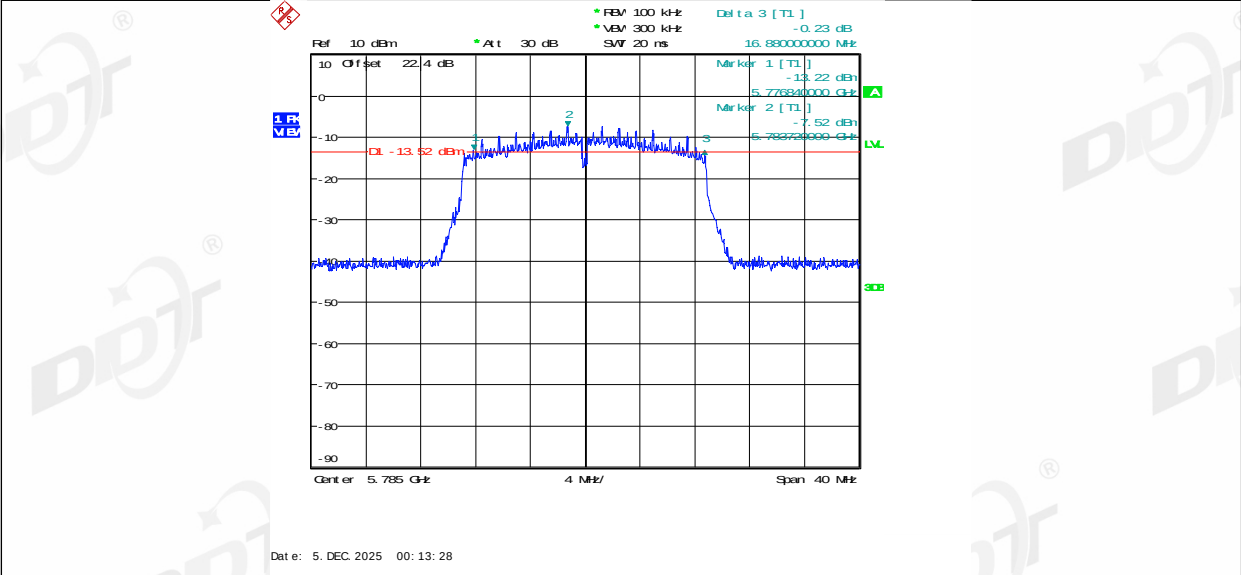


11AC20MIMO_Ant1_5825

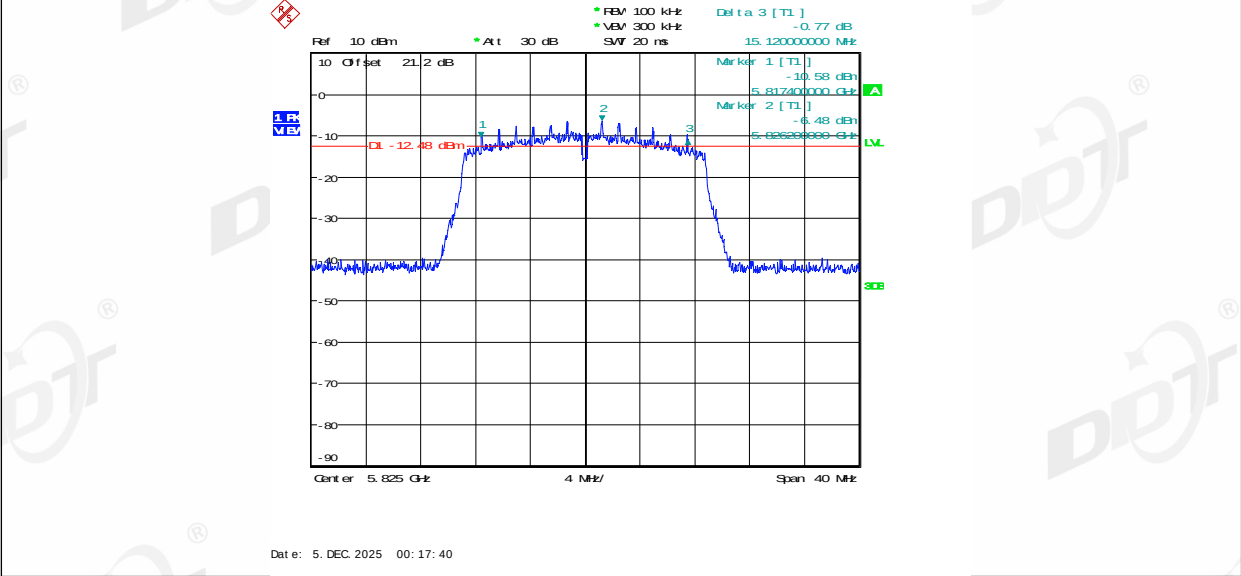


11AC20MIMO_Ant2_5825

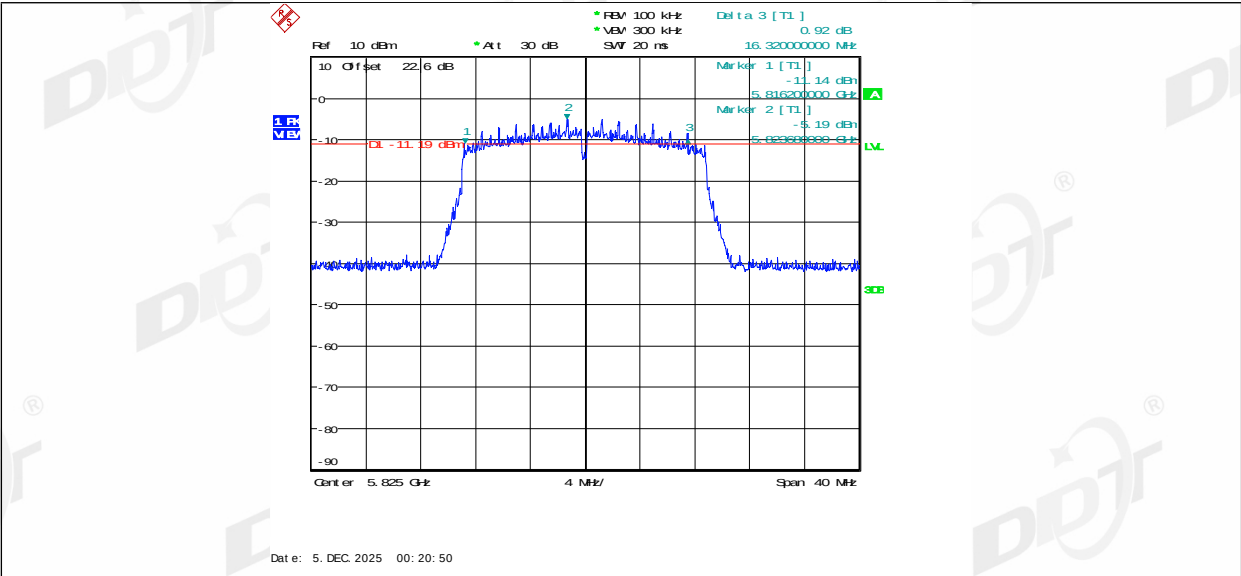


11AC40MIMO_Ant1_5755

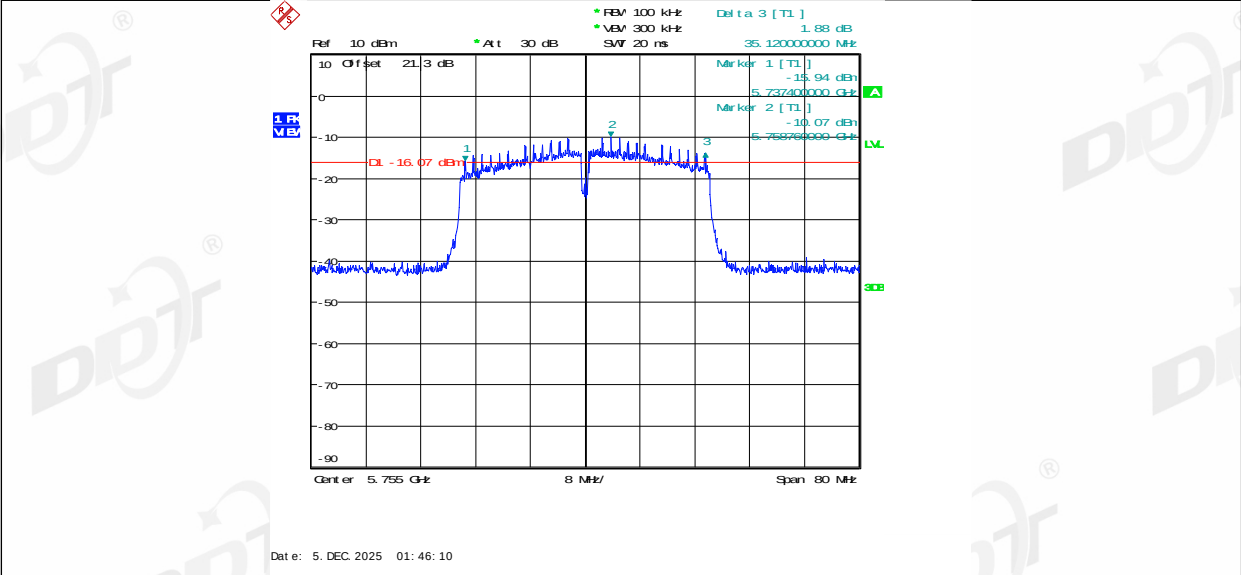


11AC40MIMO_Ant2_5755

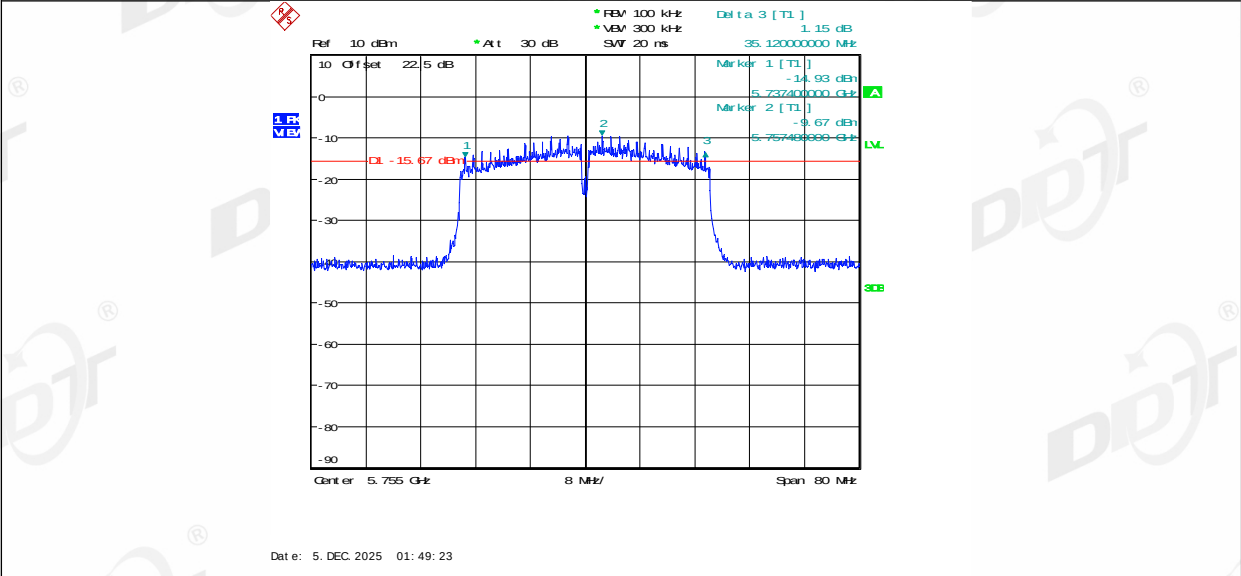


11AC40MIMO_Ant1_5795

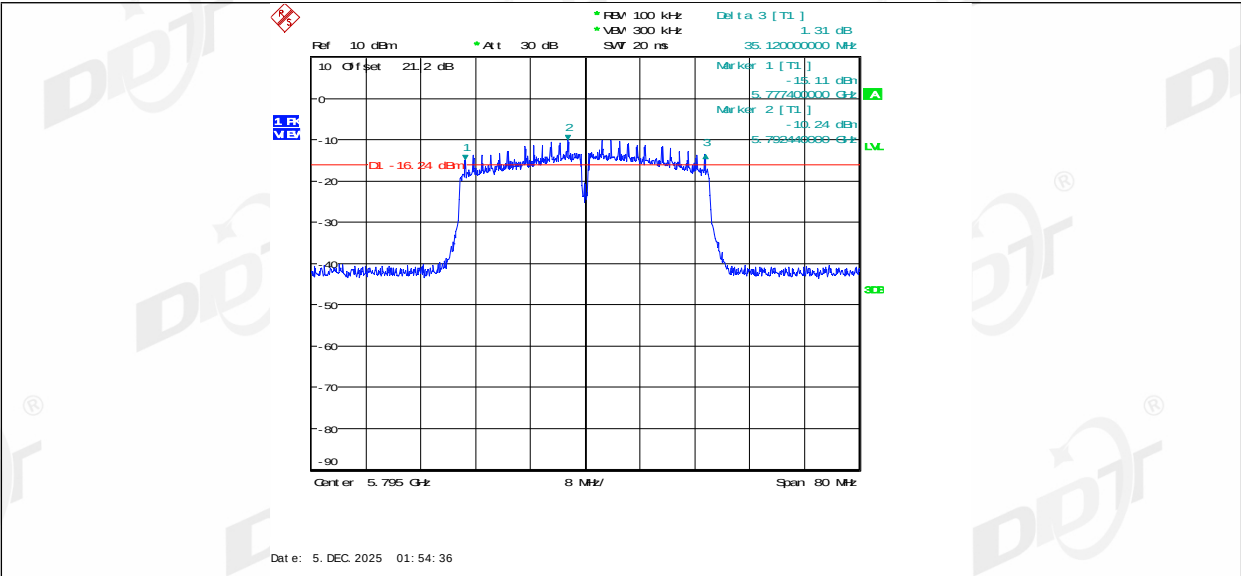


11AC40MIMO_Ant2_5795

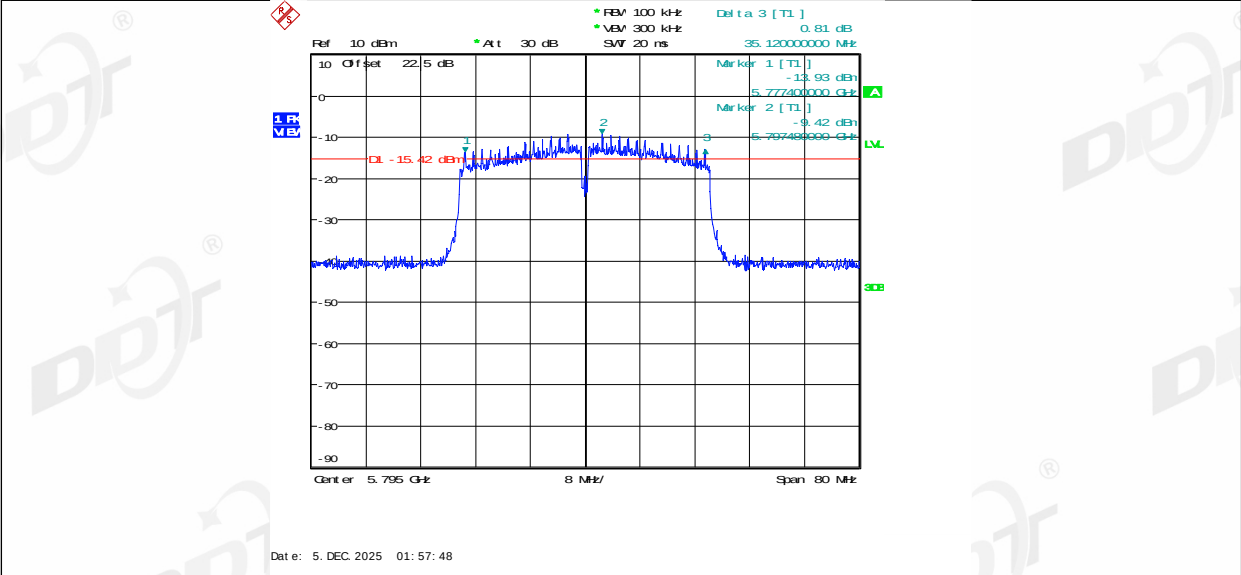

11AC80MIMO_Ant1_5775

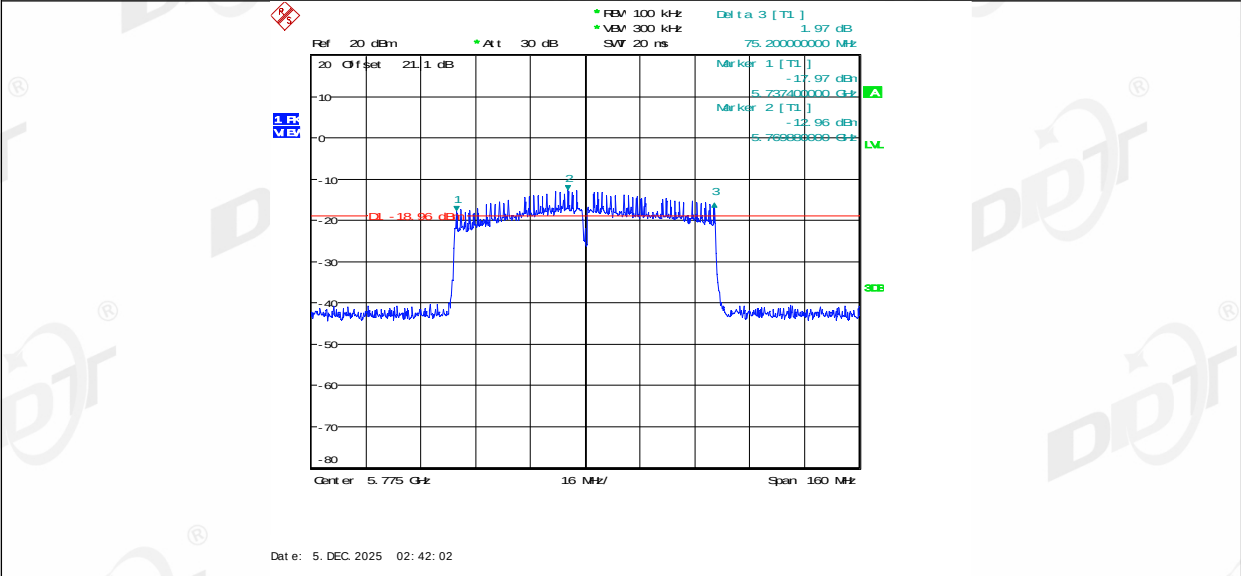


11AC80MIMO_Ant2_5775

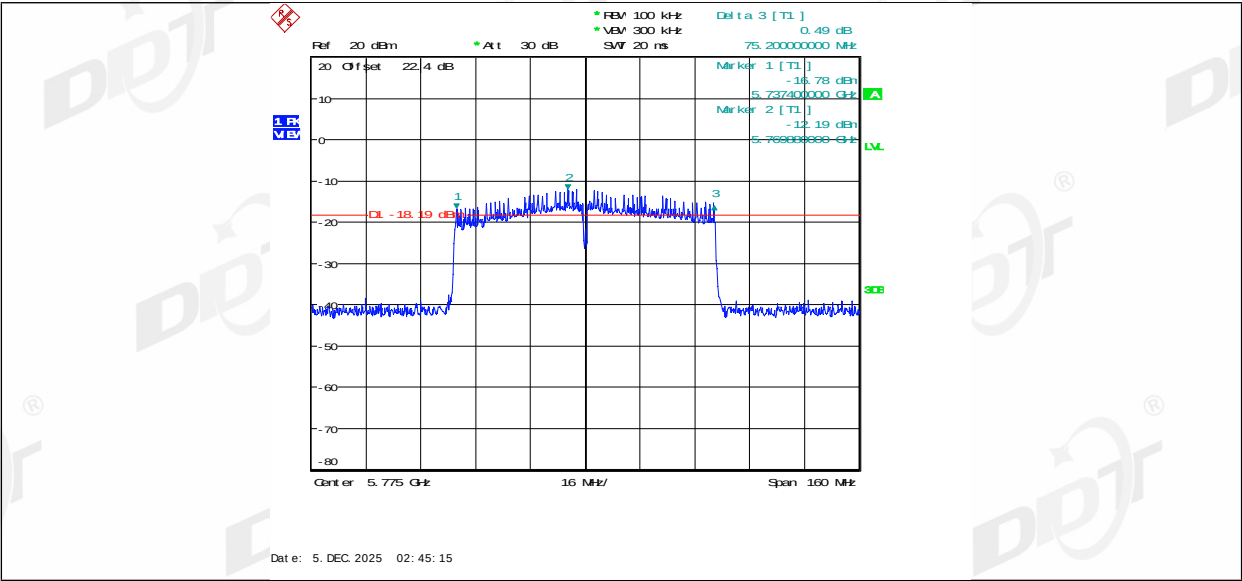

6. 99% Bandwidth

6.1. Block diagram of test setup

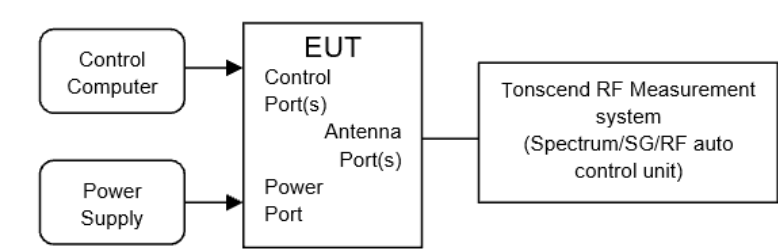

6.2. Limits

Just for Report.

6.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1% to 5% of the OBW
VBW	approximately three times the RBW
Trace	Max hold

Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.


6.4. Test result


Test Engineer:	Wayne Huang	Test Site:	RF Measurement System 1#
Ambient Condition:	24.9℃,46.1%RH	Test Date:	2025.12.01-2025.12.17
Test Power Supply:	PoE Input 24V,0.5A	Sample Number:	S25092317-001


Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	16.960	5171.4800	5188.4400	---	---
	Ant2	5180	16.920	5171.4800	5188.4000	---	---
	Ant1	5200	17.120	5191.3600	5208.4800	---	---
	Ant2	5200	17.000	5191.4400	5208.4400	---	---
	Ant1	5240	17.000	5231.4800	5248.4800	---	---
	Ant2	5240	16.920	5231.4800	5248.4000	---	---
	Ant1	5260	17.080	5251.4000	5268.4800	---	---
	Ant2	5260	16.880	5251.5200	5268.4000	---	---
	Ant1	5280	17.080	5271.4000	5288.4800	---	---
	Ant2	5280	16.960	5271.4800	5288.4400	---	---
	Ant1	5320	17.040	5311.4000	5328.4400	---	---
	Ant2	5320	16.880	5311.4800	5328.3600	---	---
	Ant1	5500	17.080	5491.4000	5508.4800	---	---
	Ant2	5500	16.960	5491.4800	5508.4400	---	---
	Ant1	5580	17.120	5571.4000	5588.5200	---	---
	Ant2	5580	16.960	5571.5200	5588.4800	---	---
	Ant1	5700	17.040	5691.4000	5708.4400	---	---
	Ant2	5700	16.880	5691.4800	5708.3600	---	---
	Ant1	5745	17.040	5736.4800	5753.5200	---	---
	Ant2	5745	16.880	5736.5600	5753.4400	---	---
	Ant1	5785	16.960	5776.4800	5793.4400	---	---
	Ant2	5785	16.840	5776.5600	5793.4000	---	---
	Ant1	5825	16.920	5816.4800	5833.4000	---	---
	Ant2	5825	17.000	5816.4400	5833.4400	---	---
11N20MIMO	Ant1	5180	18.040	5170.9200	5188.9600	---	---
	Ant2	5180	17.720	5171.0800	5188.8000	---	---
	Ant1	5200	18.040	5190.9200	5208.9600	---	---
	Ant2	5200	17.920	5191.0000	5208.9200	---	---
	Ant1	5240	17.840	5231.0000	5248.8400	---	---
	Ant2	5240	17.800	5231.0400	5248.8400	---	---
	Ant1	5260	17.880	5251.0000	5268.8800	---	---
	Ant2	5260	17.800	5251.0400	5268.8400	---	---
	Ant1	5280	17.840	5271.0000	5288.8400	---	---
	Ant2	5280	17.760	5271.0800	5288.8400	---	---
	Ant1	5320	17.840	5311.0400	5328.8800	---	---
	Ant2	5320	17.800	5311.0800	5328.8800	---	---
	Ant1	5500	17.880	5491.0000	5508.8800	---	---
	Ant2	5500	17.800	5491.0400	5508.8400	---	---
	Ant1	5580	17.880	5571.0000	5588.8800	---	---
	Ant2	5580	17.800	5571.0400	5588.8400	---	---
	Ant1	5700	17.840	5691.0400	5708.8800	---	---
	Ant2	5700	17.760	5691.0400	5708.8000	---	---
	Ant1	5745	17.840	5736.0400	5753.8800	---	---
	Ant2	5745	17.760	5736.0800	5753.8400	---	---
	Ant1	5785	17.840	5776.0400	5793.8800	---	---
	Ant2	5785	17.800	5776.0400	5793.8400	---	---
	Ant1	5825	17.800	5816.0400	5833.8400	---	---
	Ant2	5825	17.840	5816.0000	5833.8400	---	---
11N40MIMO	Ant1	5190	36.080	5171.9200	5208.0000	---	---
	Ant2	5190	36.240	5171.8400	5208.0800	---	---
	Ant1	5230	36.240	5211.8400	5248.0800	---	---
	Ant2	5230	36.160	5211.9200	5248.0800	---	---
	Ant1	5270	36.160	5251.8400	5288.0000	---	---
	Ant2	5270	36.240	5251.9200	5288.1600	---	---
	Ant1	5310	36.160	5291.8400	5328.0000	---	---

	Ant2	5310	36.240	5291.8400	5328.0800	---	---
	Ant1	5510	36.240	5491.8400	5528.0800	---	---
	Ant2	5510	36.160	5491.9200	5528.0800	---	---
	Ant1	5550	36.240	5531.8400	5568.0800	---	---
	Ant2	5550	36.160	5531.9200	5568.0800	---	---
	Ant1	5670	36.160	5651.8400	5688.0000	---	---
	Ant2	5670	36.240	5651.7600	5688.0000	---	---
	Ant1	5755	36.080	5736.9200	5773.0000	---	---
	Ant2	5755	36.240	5736.8400	5773.0800	---	---
	Ant1	5795	36.080	5776.9200	5813.0000	---	---
	Ant2	5795	36.160	5776.9200	5813.0800	---	---
	Ant1	5180	17.760	5171.0800	5188.8400	---	---
	Ant2	5180	17.720	5171.0800	5188.8000	---	---
	Ant1	5200	17.920	5191.0000	5208.9200	---	---
	Ant2	5200	17.880	5191.0000	5208.8800	---	---
	Ant1	5240	17.920	5230.9600	5248.8800	---	---
	Ant2	5240	17.800	5231.0800	5248.8800	---	---
	Ant1	5260	17.920	5251.0000	5268.9200	---	---
	Ant2	5260	17.720	5251.0800	5268.8000	---	---
	Ant1	5280	17.840	5271.0000	5288.8400	---	---
11AC20MIM O	Ant2	5280	17.800	5271.0800	5288.8800	---	---
	Ant1	5320	17.800	5311.0000	5328.8000	---	---
	Ant2	5320	17.800	5311.0400	5328.8400	---	---
	Ant1	5500	17.880	5491.0000	5508.8800	---	---
	Ant2	5500	17.760	5491.0800	5508.8400	---	---
	Ant1	5580	17.920	5571.0400	5588.9600	---	---
	Ant2	5580	17.720	5571.0800	5588.8000	---	---
	Ant1	5700	17.840	5691.0400	5708.8800	---	---
	Ant2	5700	17.800	5691.0400	5708.8400	---	---
	Ant1	5745	17.880	5736.0400	5753.9200	---	---
	Ant2	5745	17.760	5736.0800	5753.8400	---	---
	Ant1	5785	17.880	5776.0000	5793.8800	---	---
	Ant2	5785	17.840	5776.0400	5793.8800	---	---
	Ant1	5825	17.840	5816.0000	5833.8400	---	---
	Ant2	5825	17.840	5816.0000	5833.8400	---	---
	Ant1	5190	36.160	5171.8400	5208.0000	---	---
	Ant2	5190	36.240	5171.7600	5208.0000	---	---
	Ant1	5230	36.160	5211.8400	5248.0000	---	---
	Ant2	5230	36.240	5211.8400	5248.0800	---	---
	Ant1	5270	36.240	5251.8400	5288.0800	---	---
11AC40MIM O	Ant2	5270	36.320	5251.8400	5288.1600	---	---
	Ant1	5310	36.080	5291.8400	5327.9200	---	---
	Ant2	5310	36.320	5291.7600	5328.0800	---	---
	Ant1	5510	36.160	5491.8400	5528.0000	---	---
	Ant2	5510	36.160	5491.8400	5528.0000	---	---
	Ant1	5550	36.160	5531.8400	5568.0000	---	---
	Ant2	5550	36.000	5531.9200	5567.9200	---	---
	Ant1	5670	36.240	5651.7600	5688.0000	---	---
	Ant2	5670	36.240	5651.7600	5688.0000	---	---
	Ant1	5755	36.160	5737.0000	5773.1600	---	---
	Ant2	5755	36.160	5736.9200	5773.0800	---	---
	Ant1	5795	36.240	5776.8400	5813.0800	---	---
	Ant2	5795	36.240	5776.8400	5813.0800	---	---
	Ant1	5210	75.840	5171.9200	5247.7600	---	---
	Ant2	5210	76.000	5171.9200	5247.9200	---	---
	Ant1	5290	75.680	5252.2400	5327.9200	---	---
	Ant2	5290	75.680	5252.2400	5327.9200	---	---
	Ant1	5530	75.680	5492.0800	5567.7600	---	---
	Ant2	5530	75.840	5492.2400	5568.0800	---	---
	Ant1	5610	75.520	5572.2400	5647.7600	---	---
11AC80MIM O	Ant2	5610	75.520	5572.2400	5647.7600	---	---
	Ant1	5775	75.840	5737.0800	5812.9200	---	---
	Ant2	5775	75.680	5737.2400	5812.9200	---	---


6.5. Test graphs

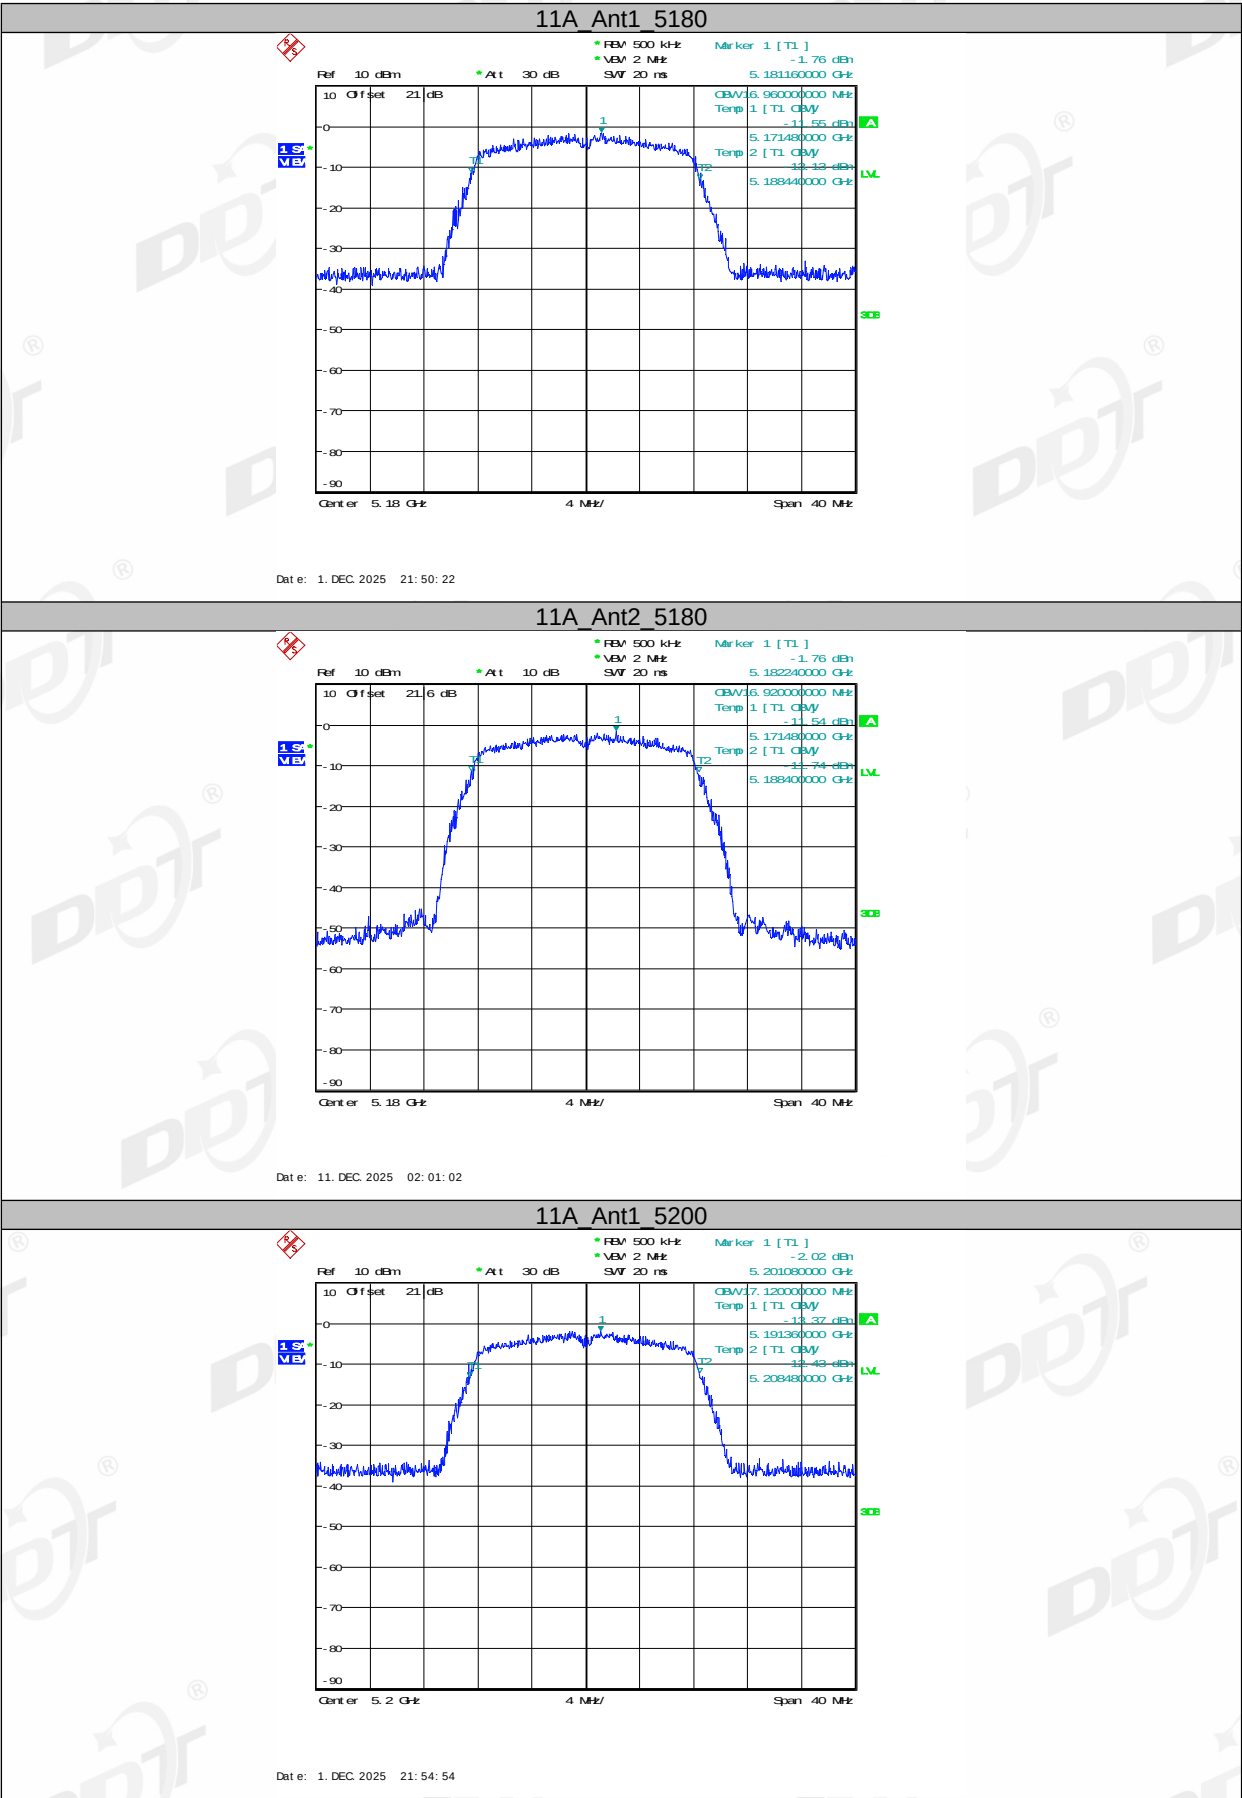

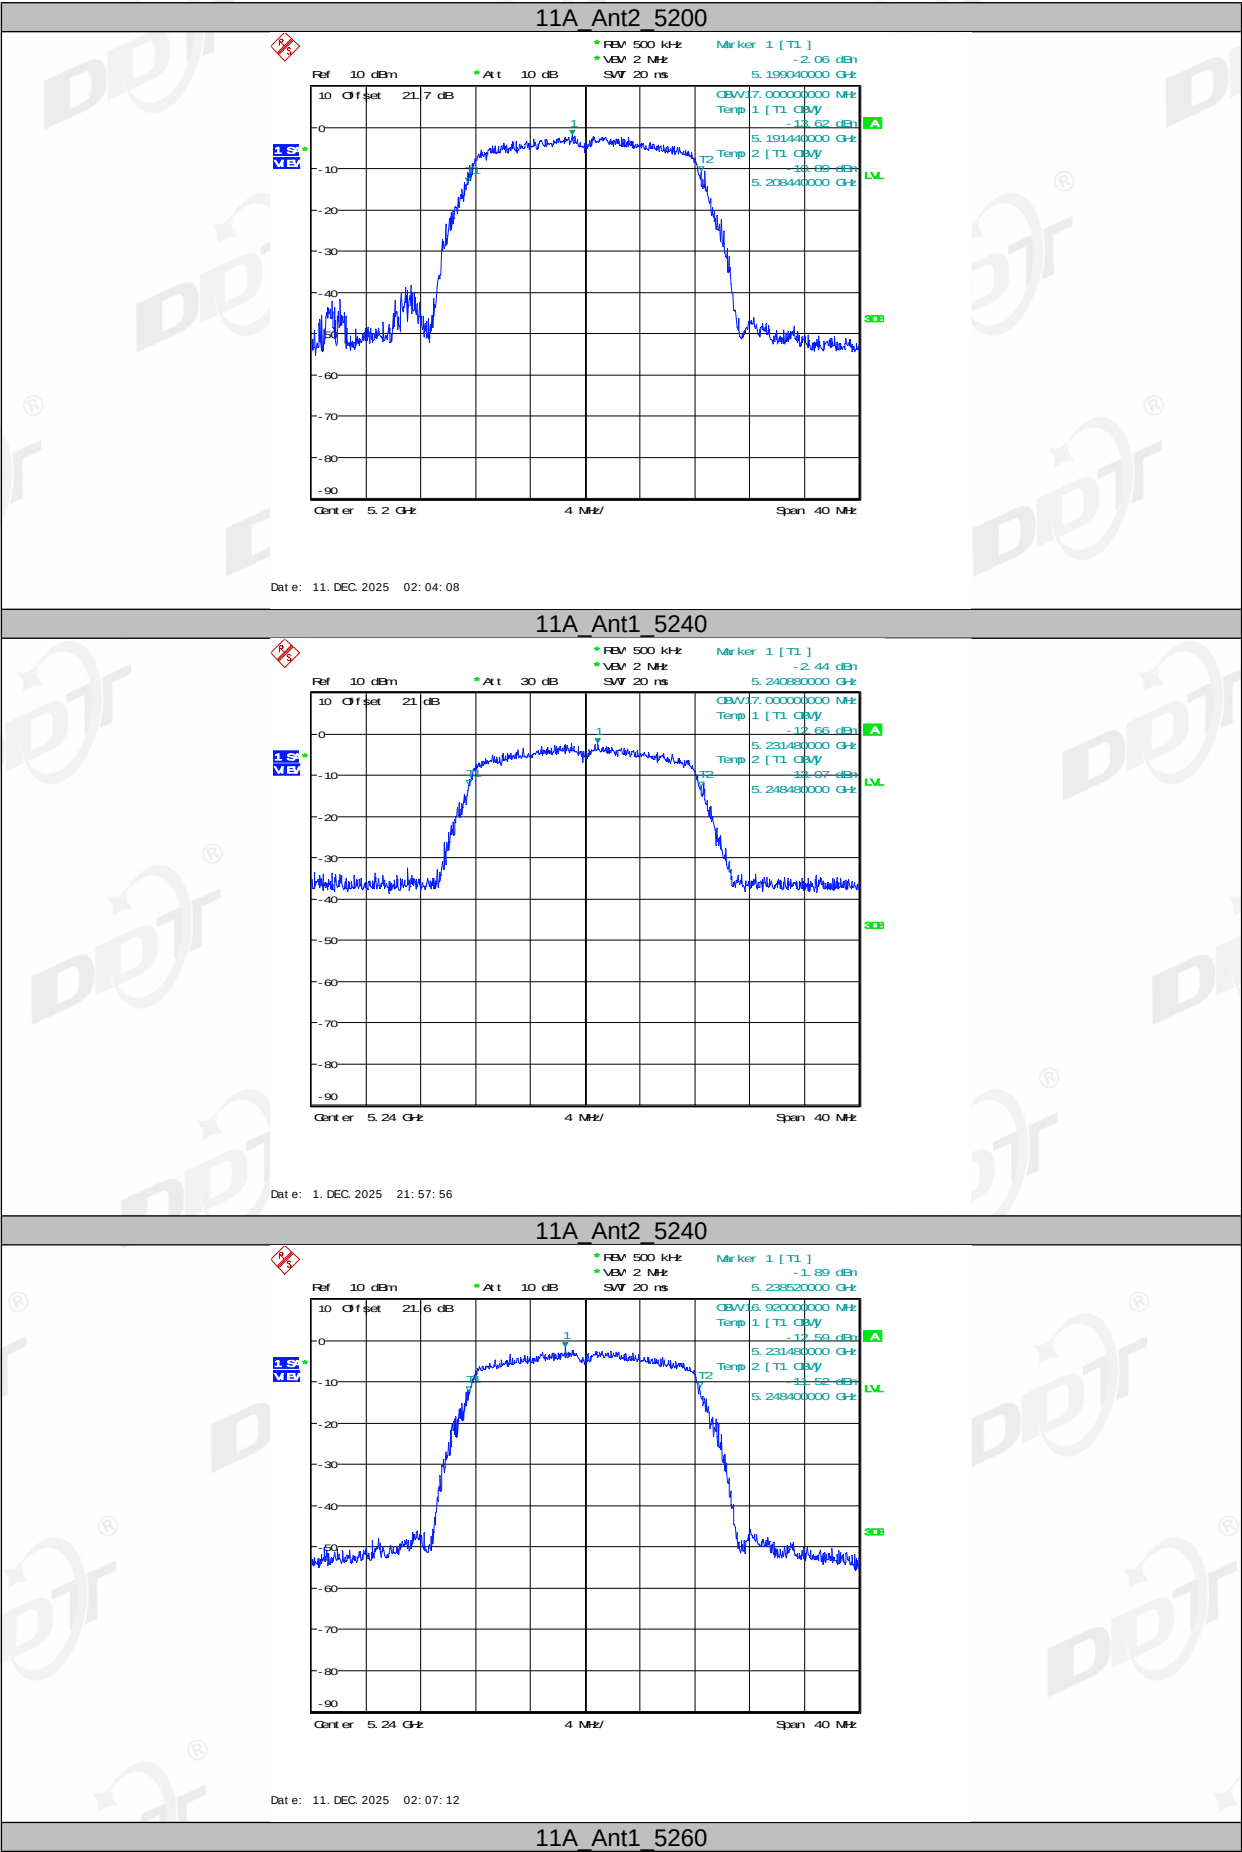


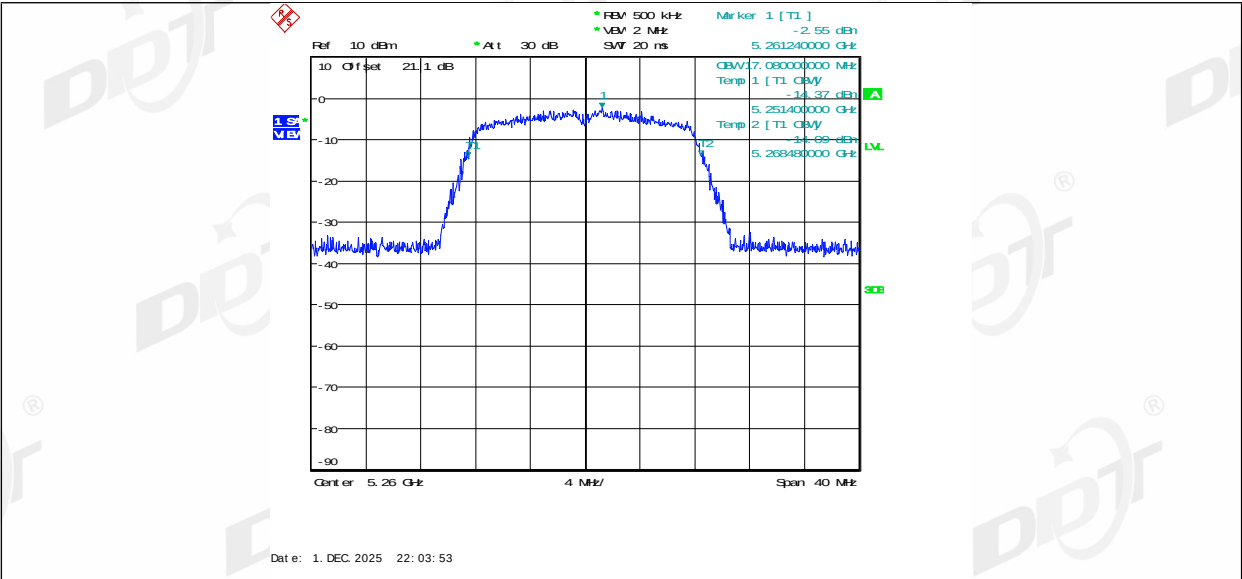


11A_Ant2_5260

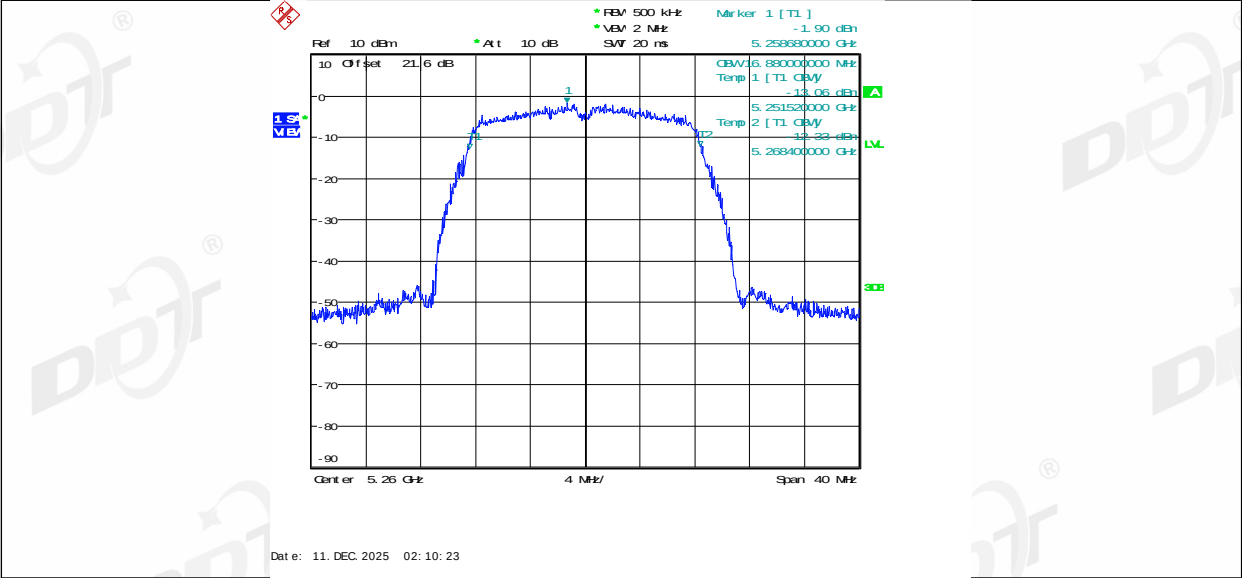


11A_Ant1_5280

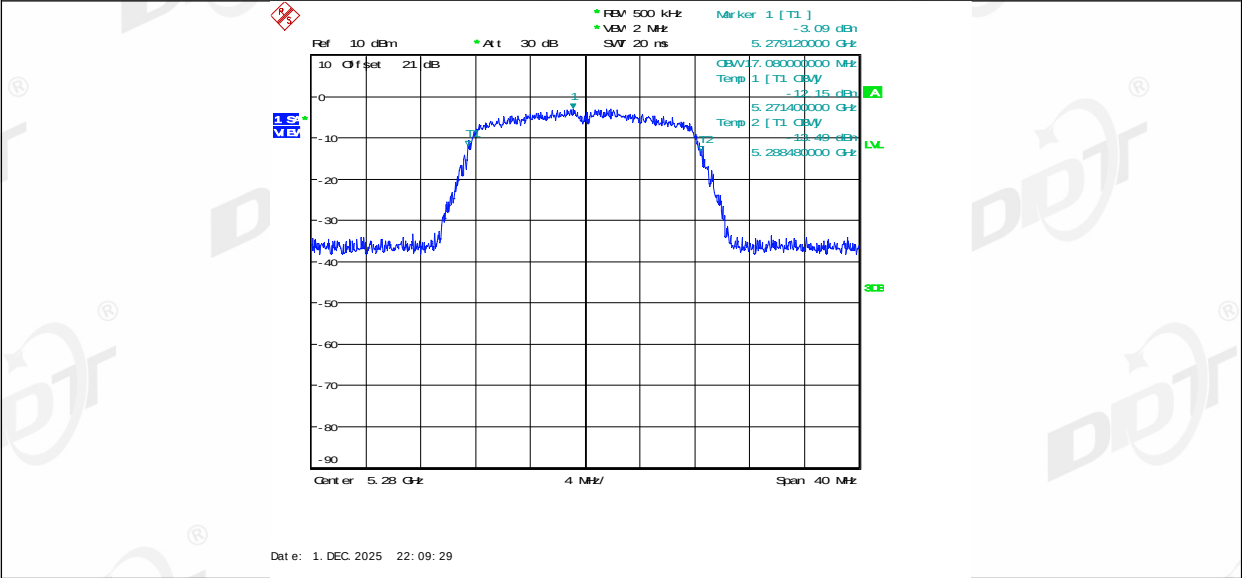


11A_Ant2_5280

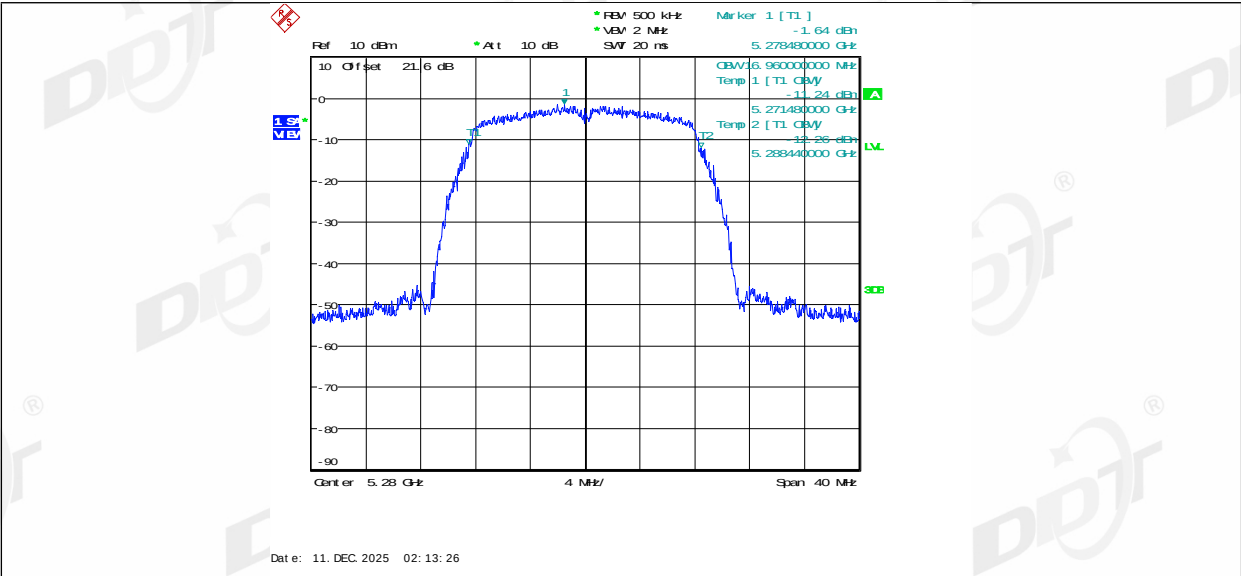


11A_Ant1_5320

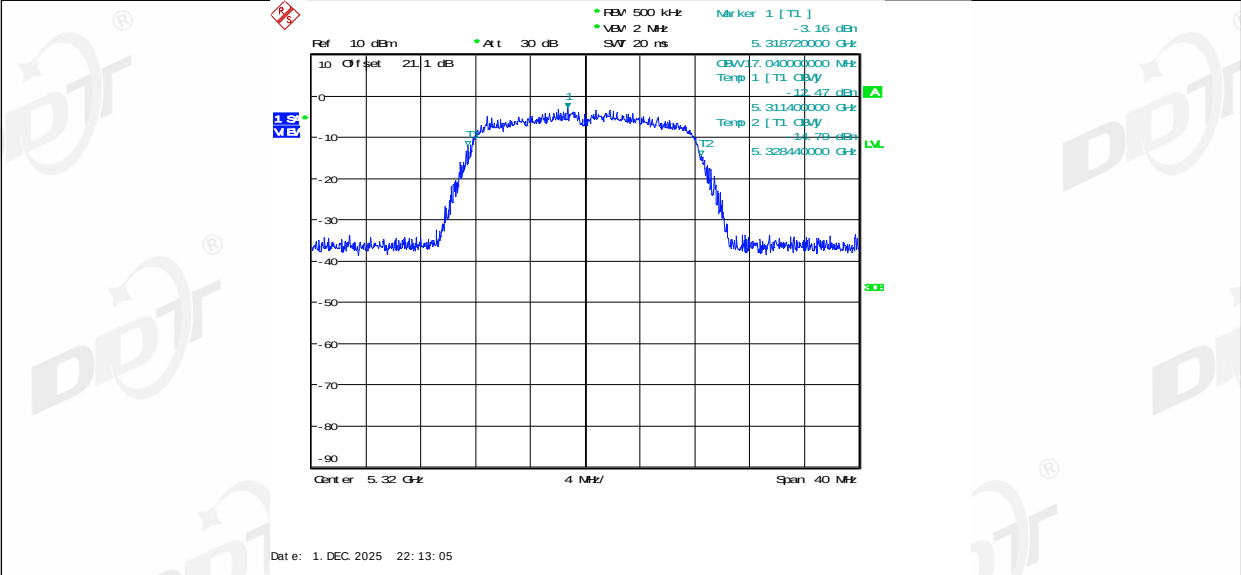


11A_Ant2_5320

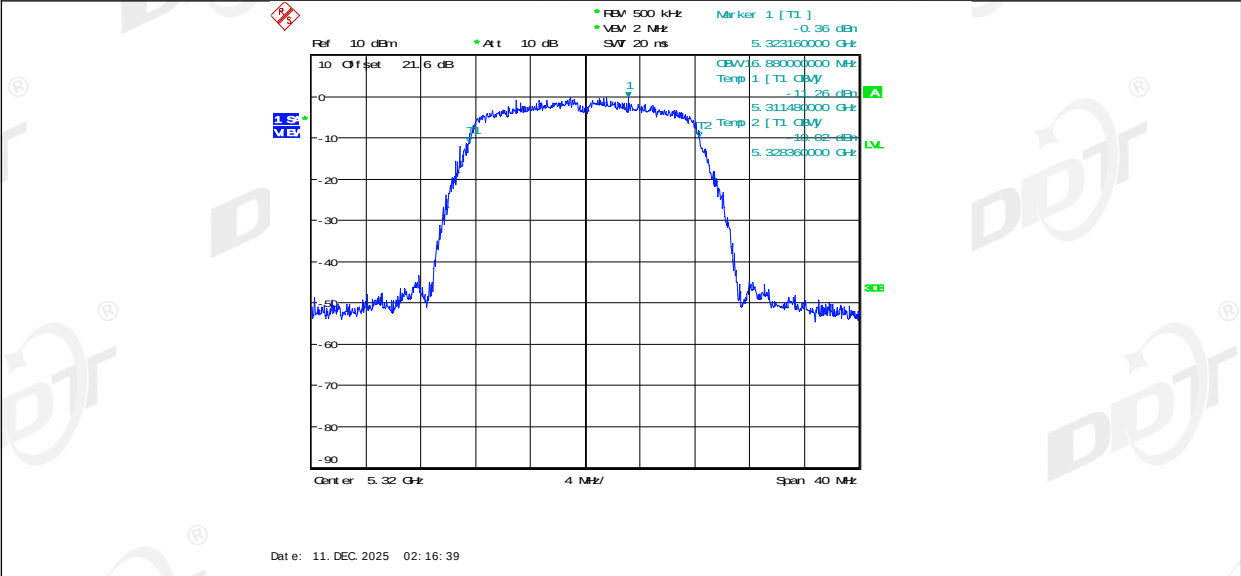


11A_Ant1_5500

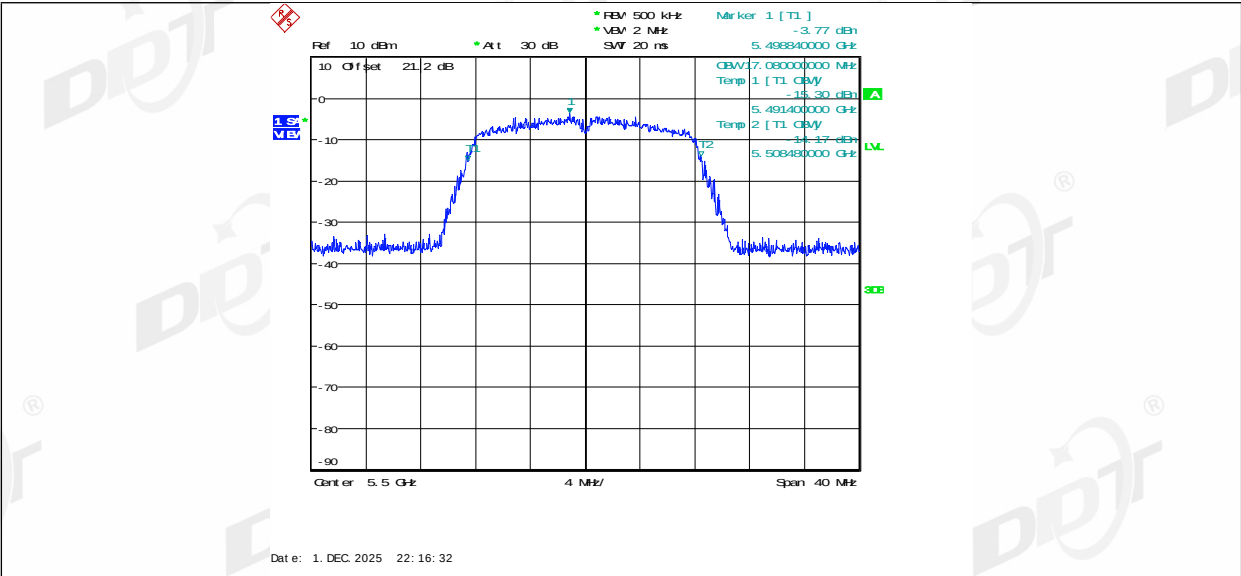




11A_Ant2_5500

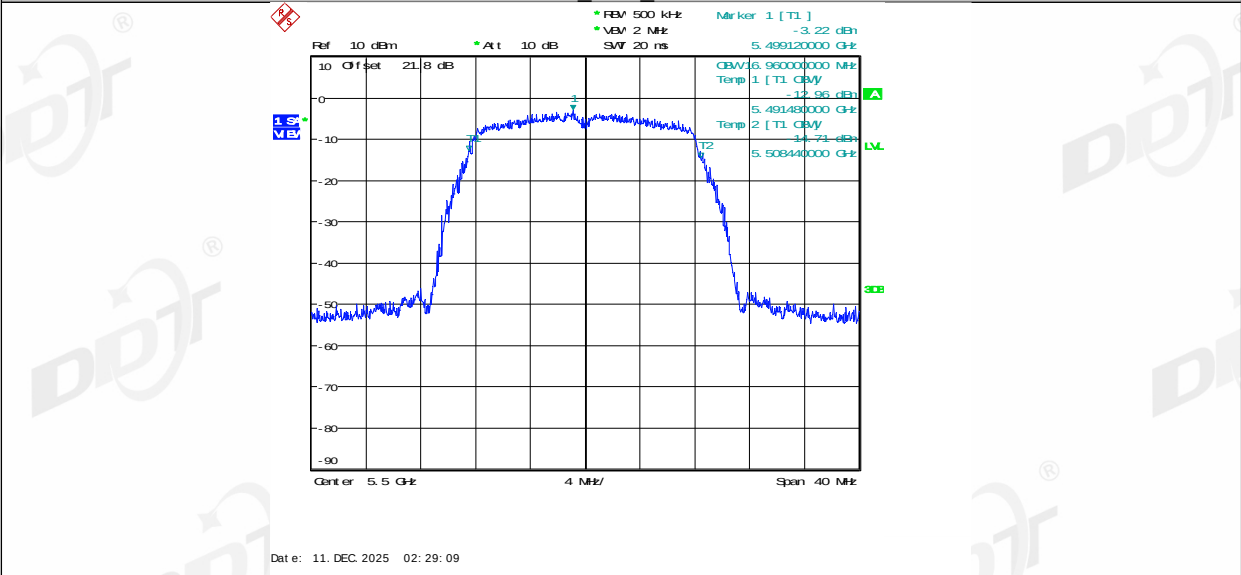


11A_Ant1_5580

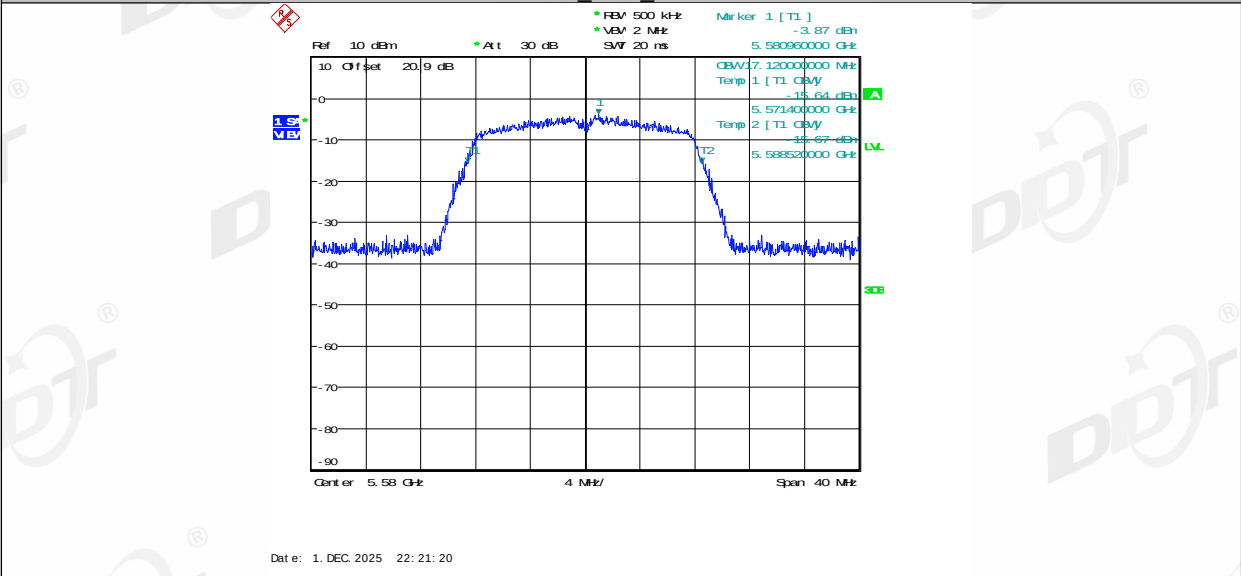


11A_Ant2_5580

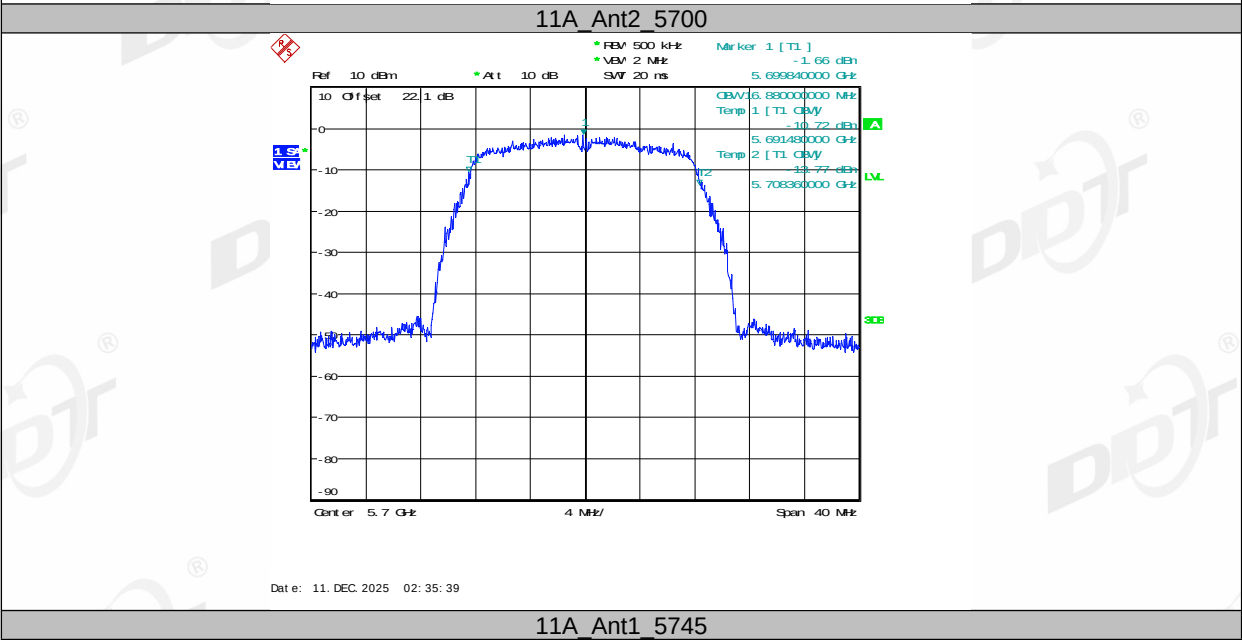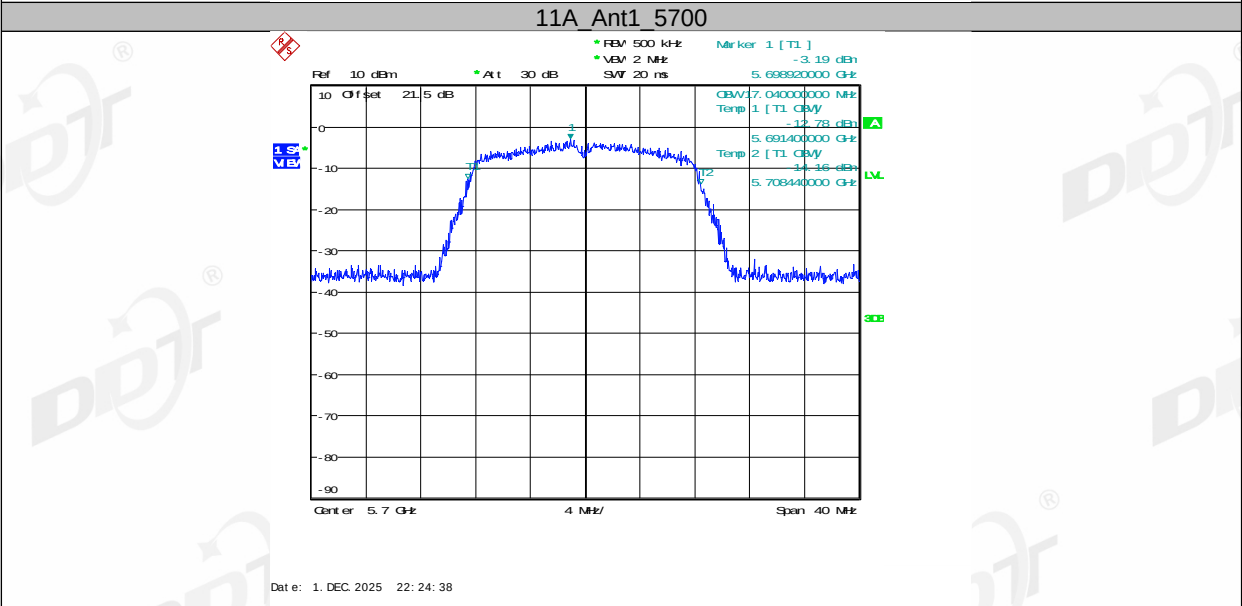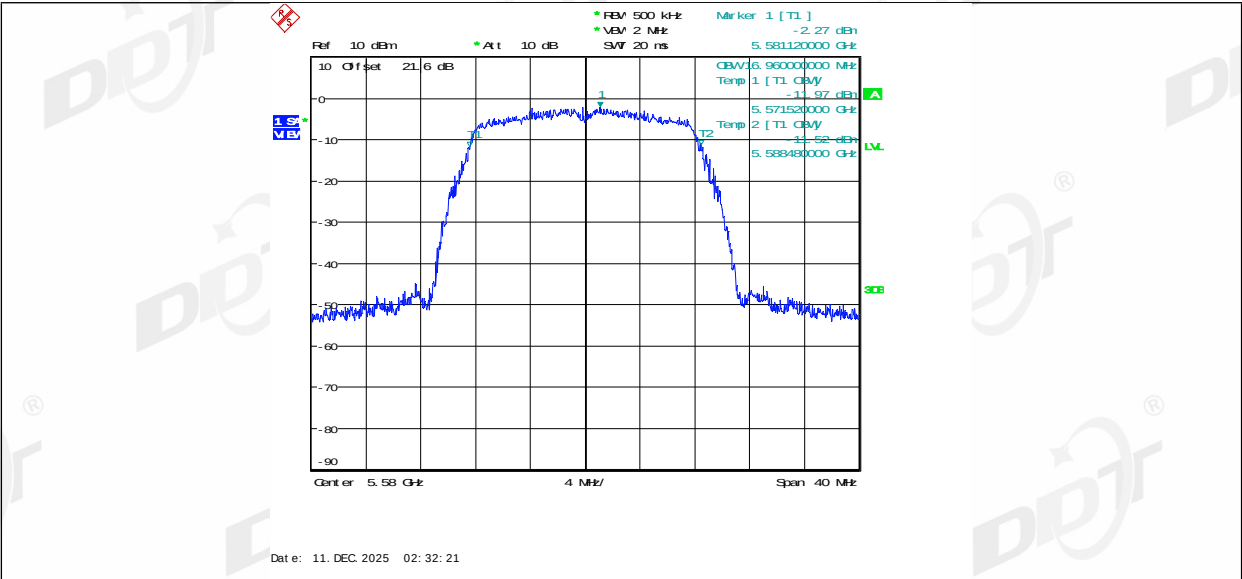


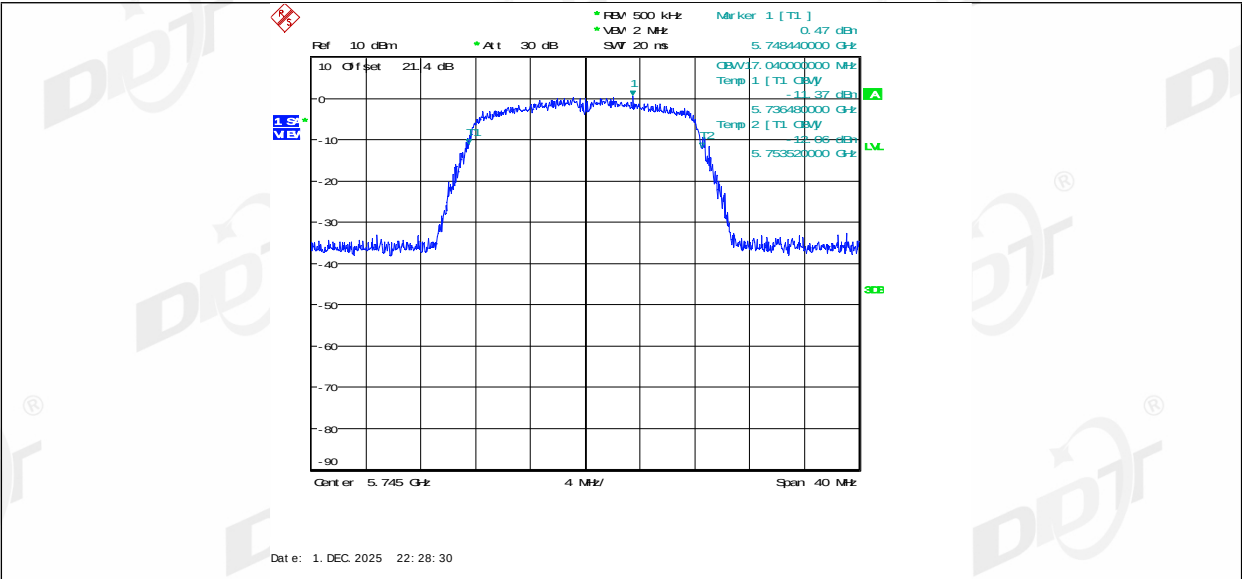


11A_Ant2_5745

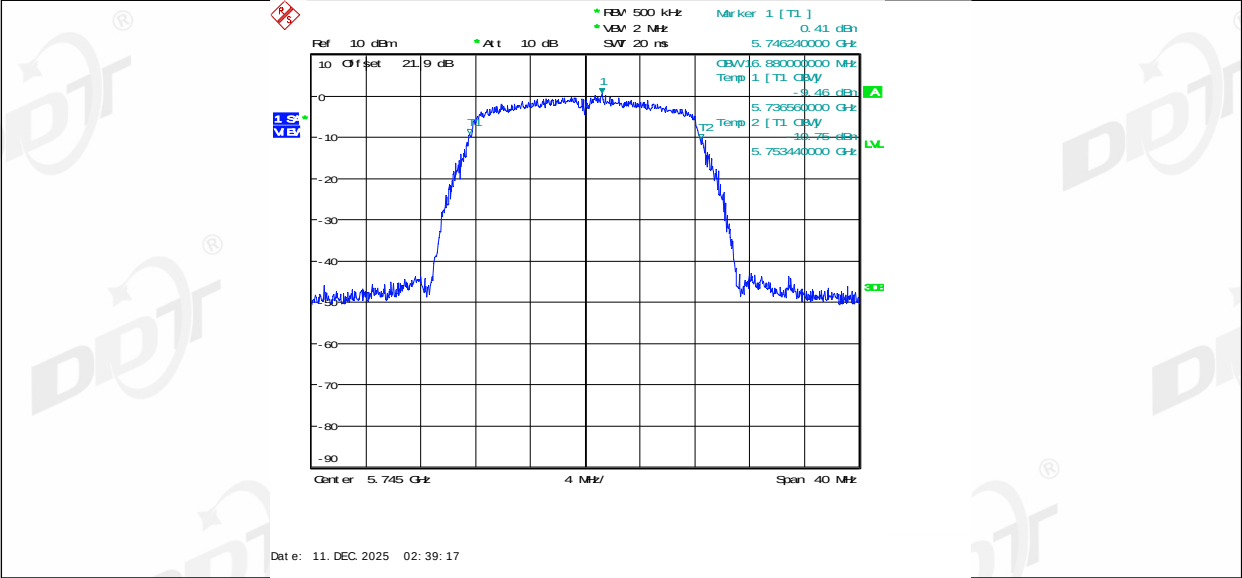


11A_Ant1_5785

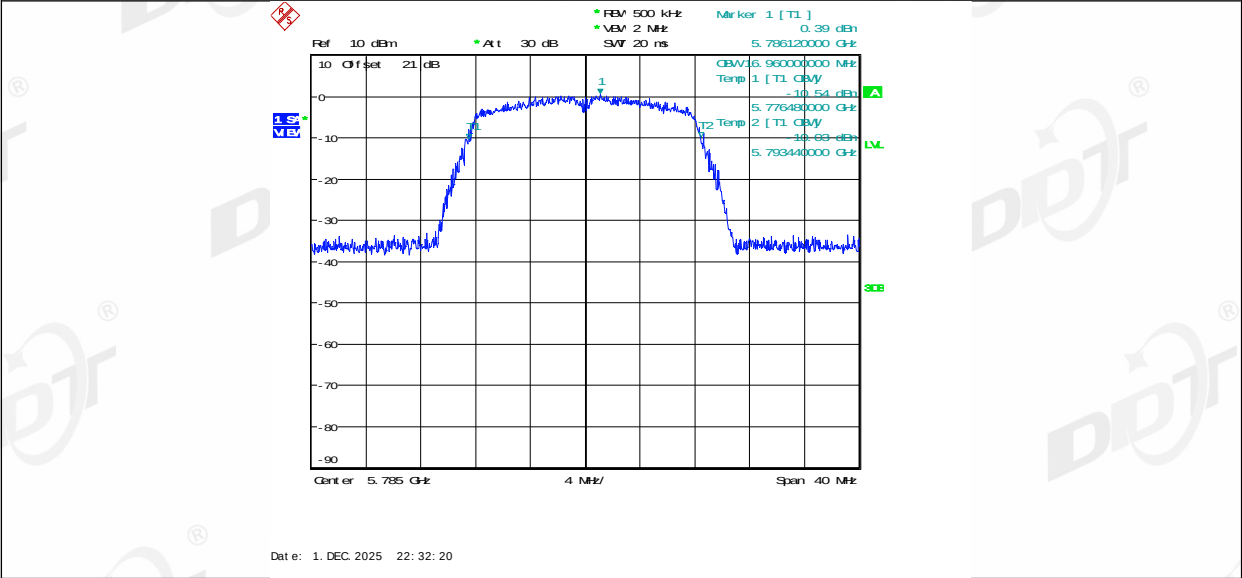


11A_Ant2_5785

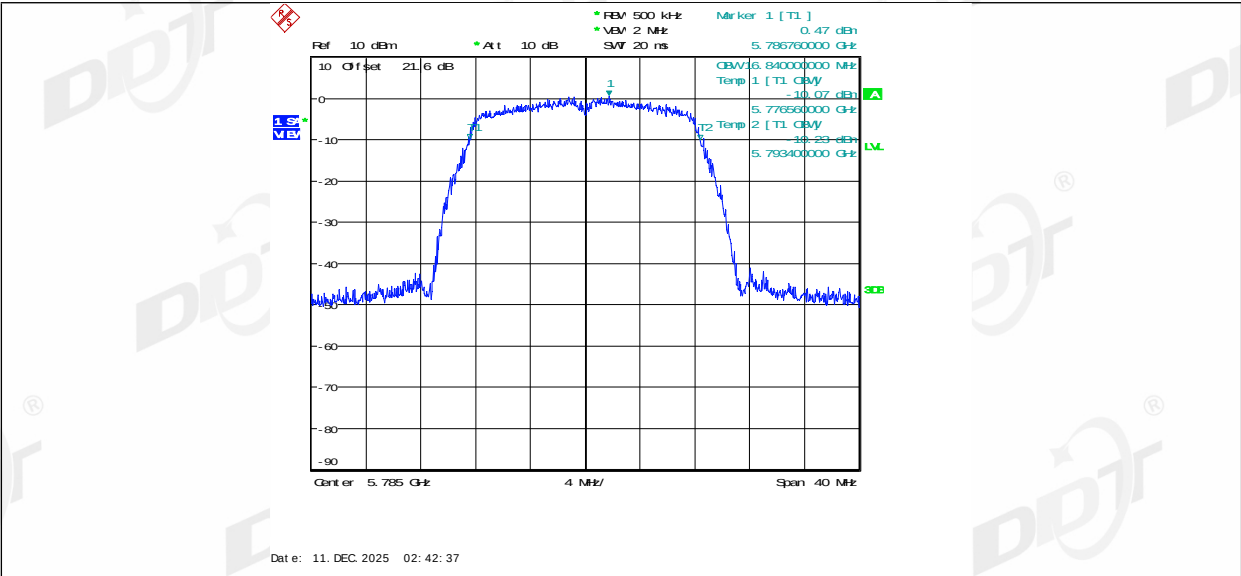


11A_Ant1_5825

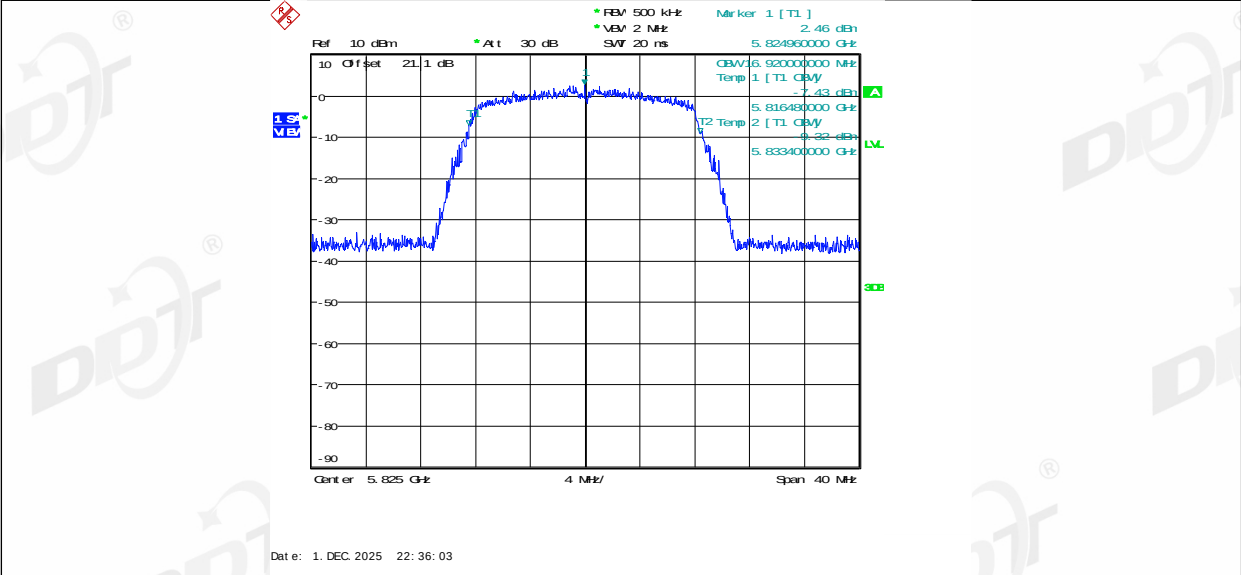


11A_Ant2_5825

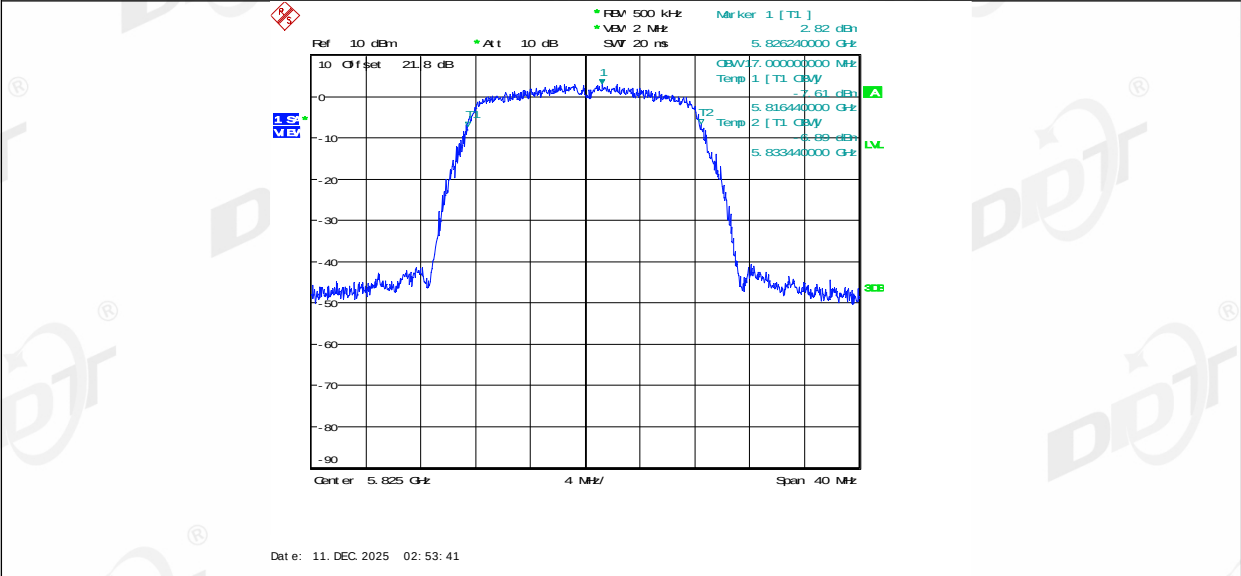


11N20MIMO_Ant1_5180

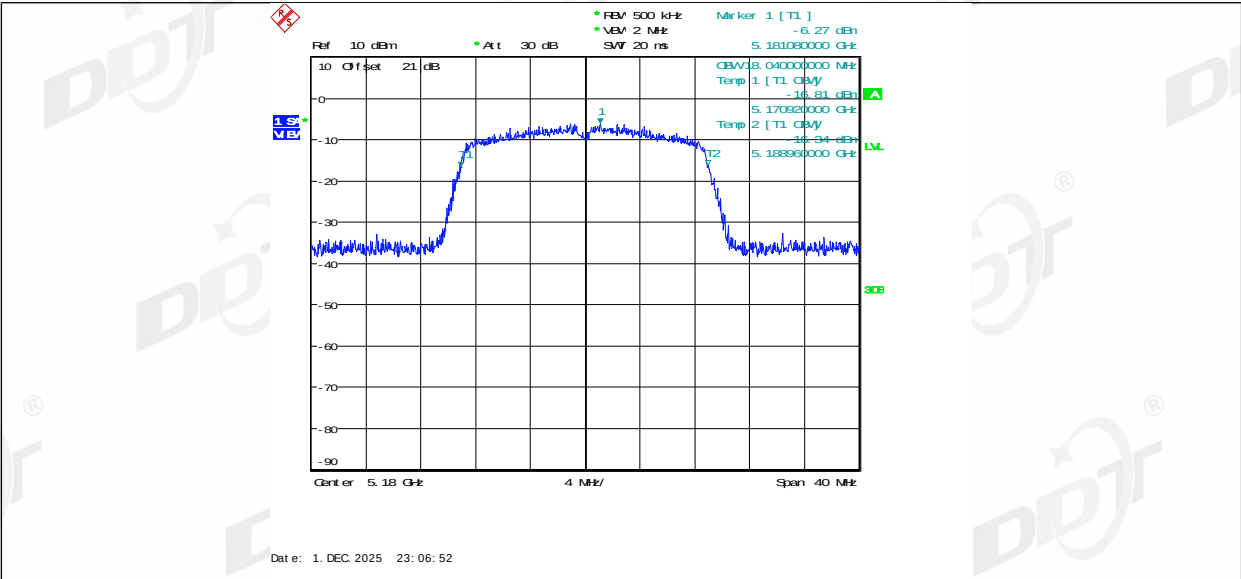


11N20MIMO_Ant2_5180

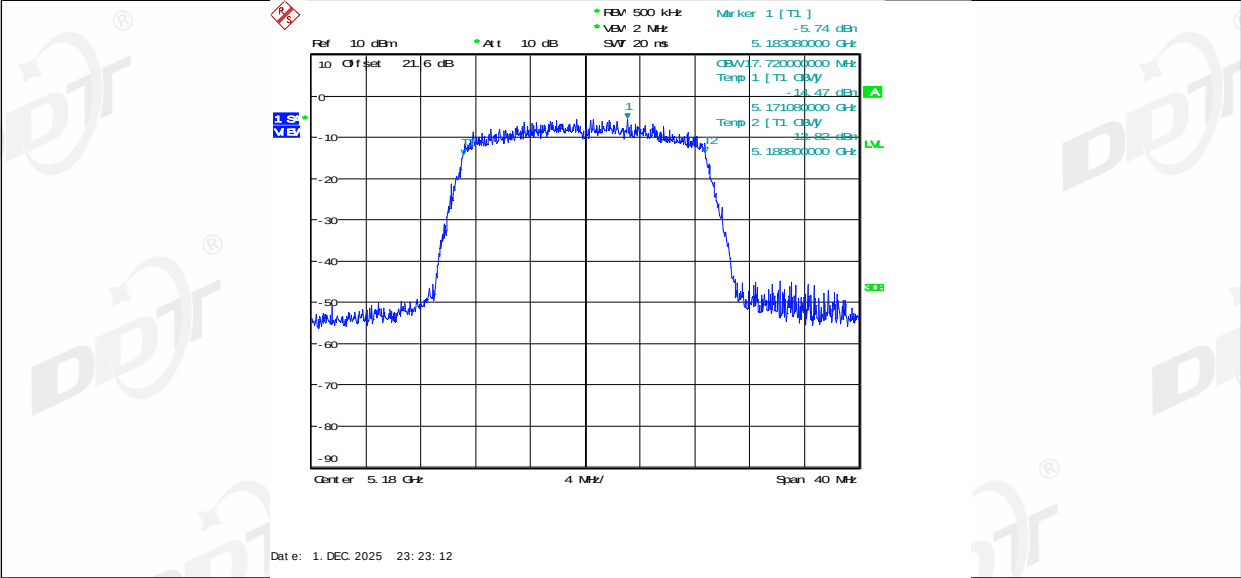


11N20MIMO_Ant1_5200

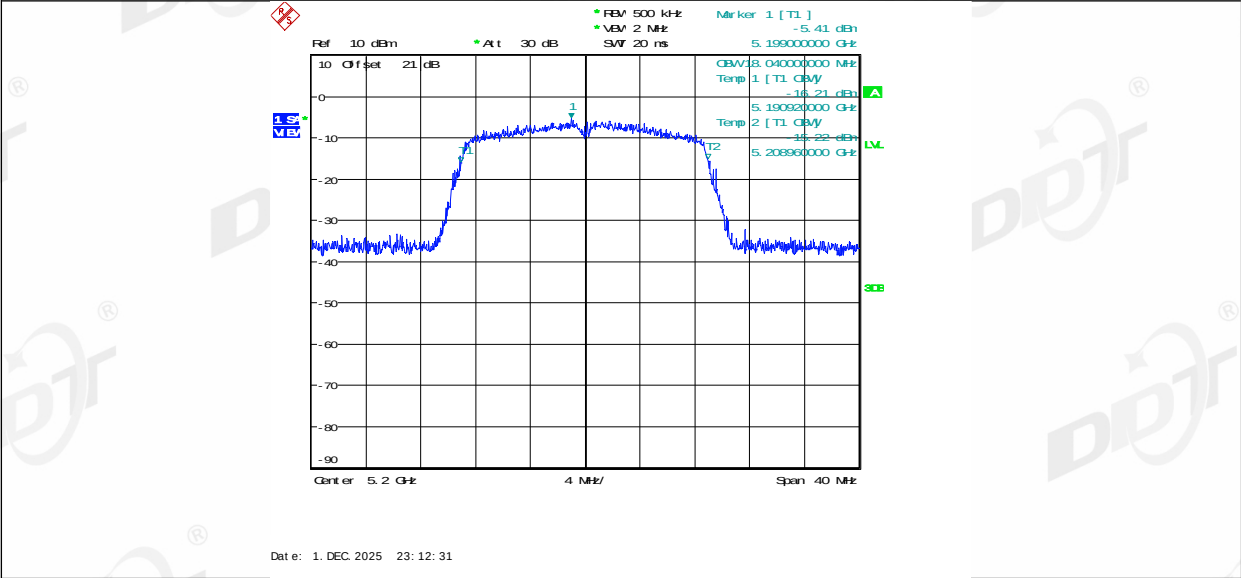


11N20MIMO_Ant2_5200

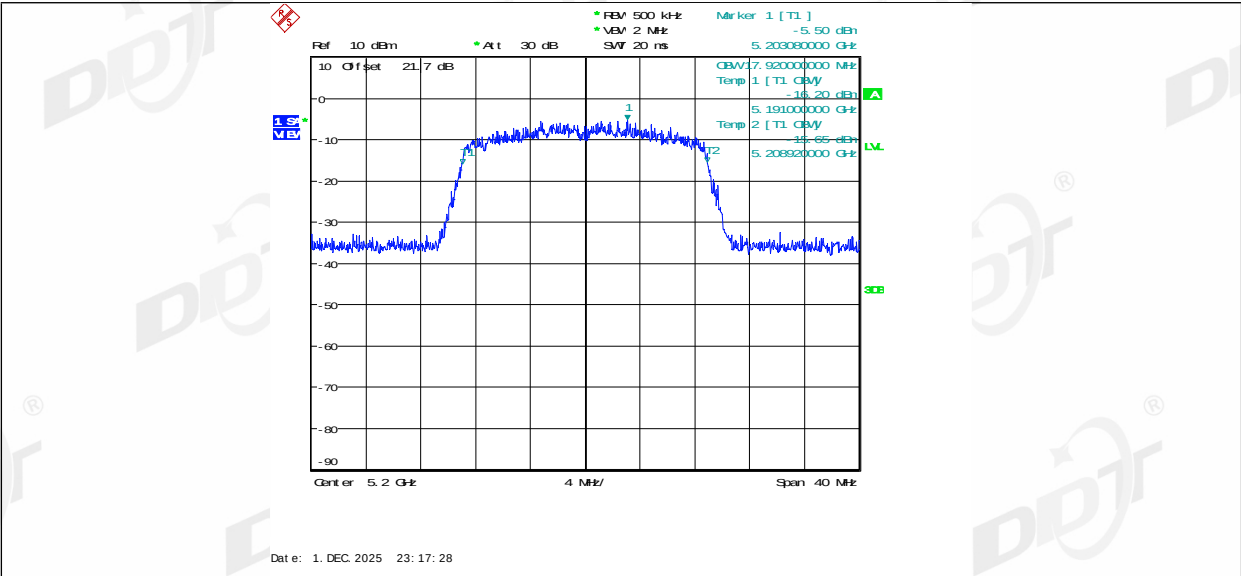


11N20MIMO_Ant1_5240

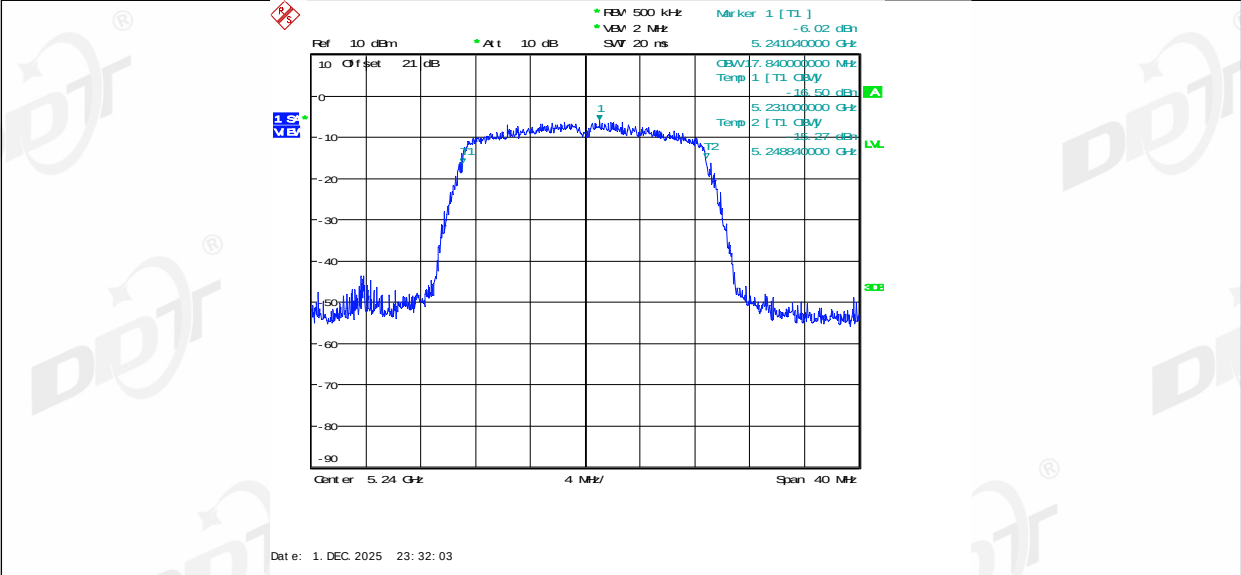


11N20MIMO_Ant2_5240

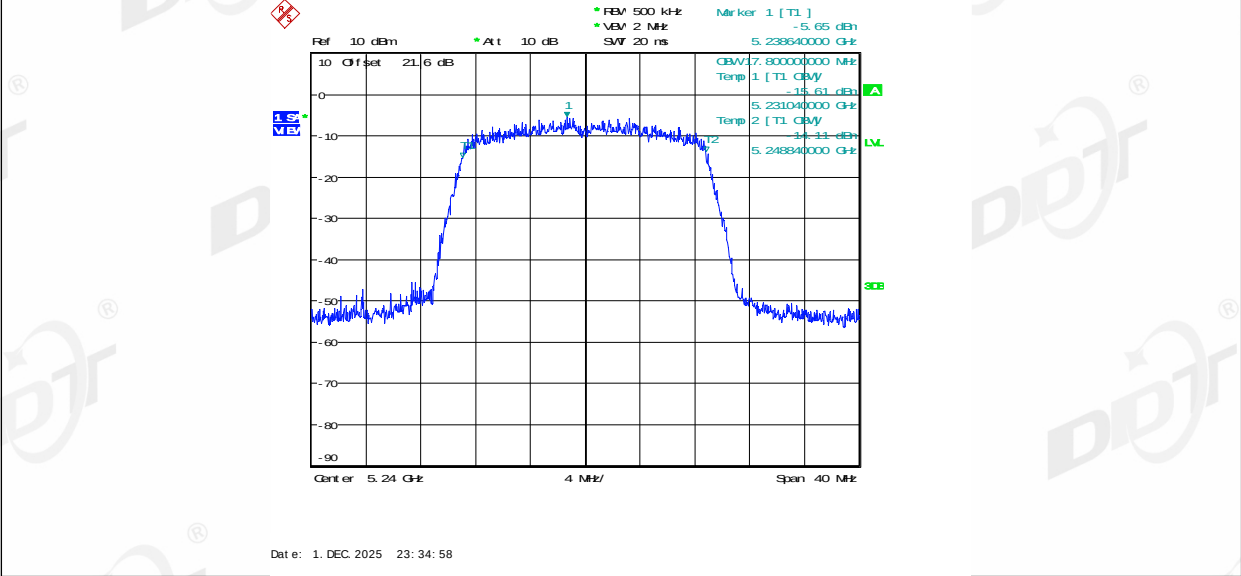


11N20MIMO_Ant1_5260

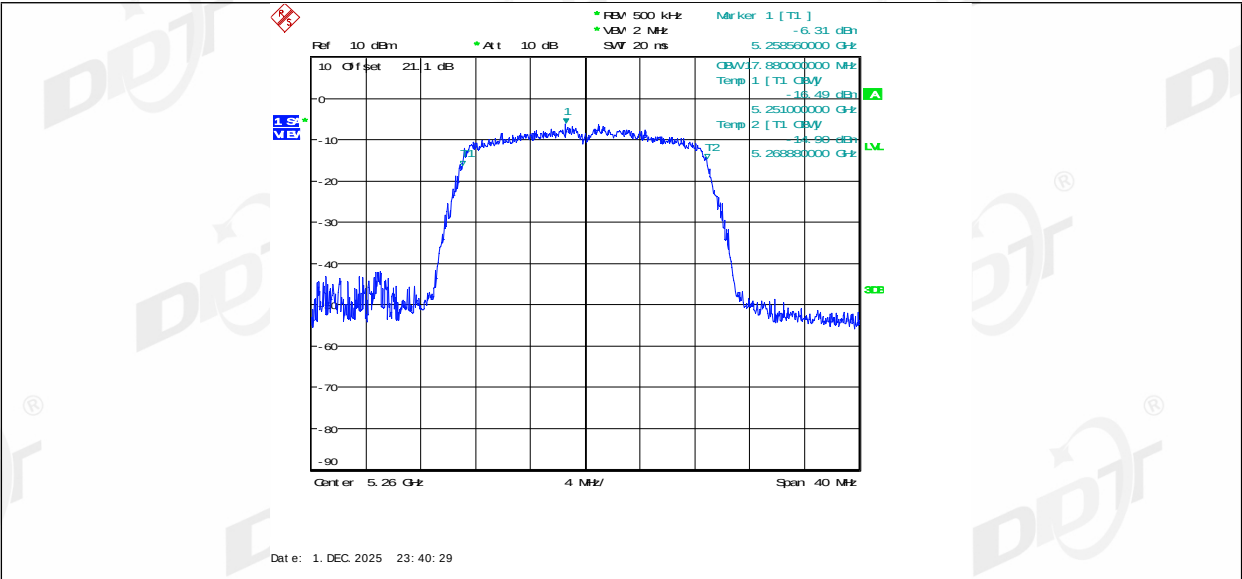


11N20MIMO_Ant2_5260

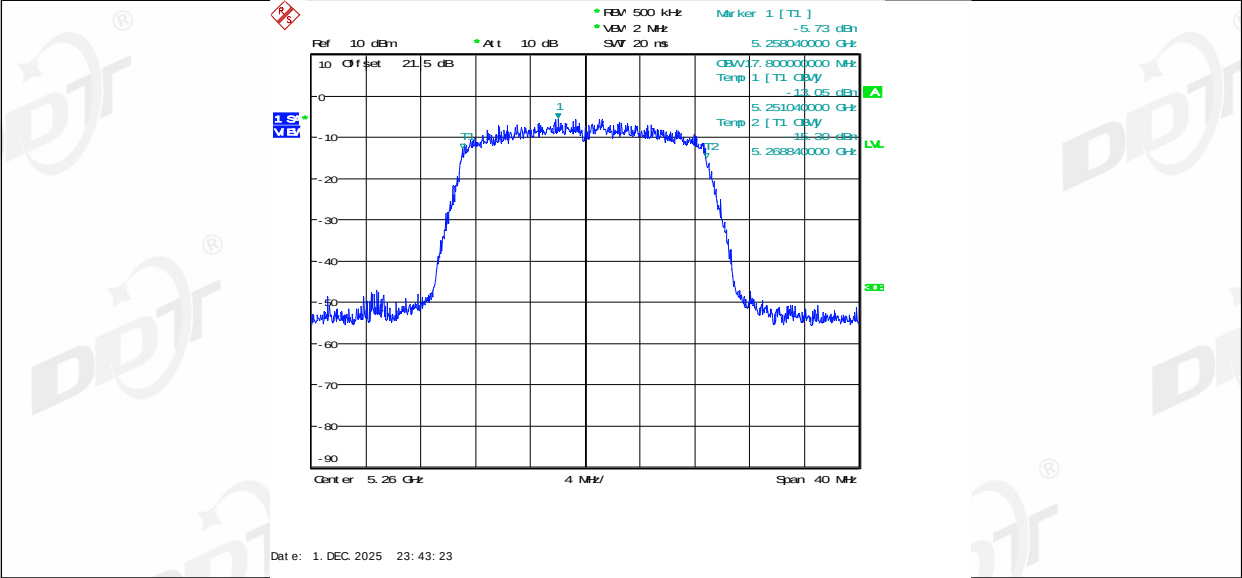


11N20MIMO_Ant1_5280

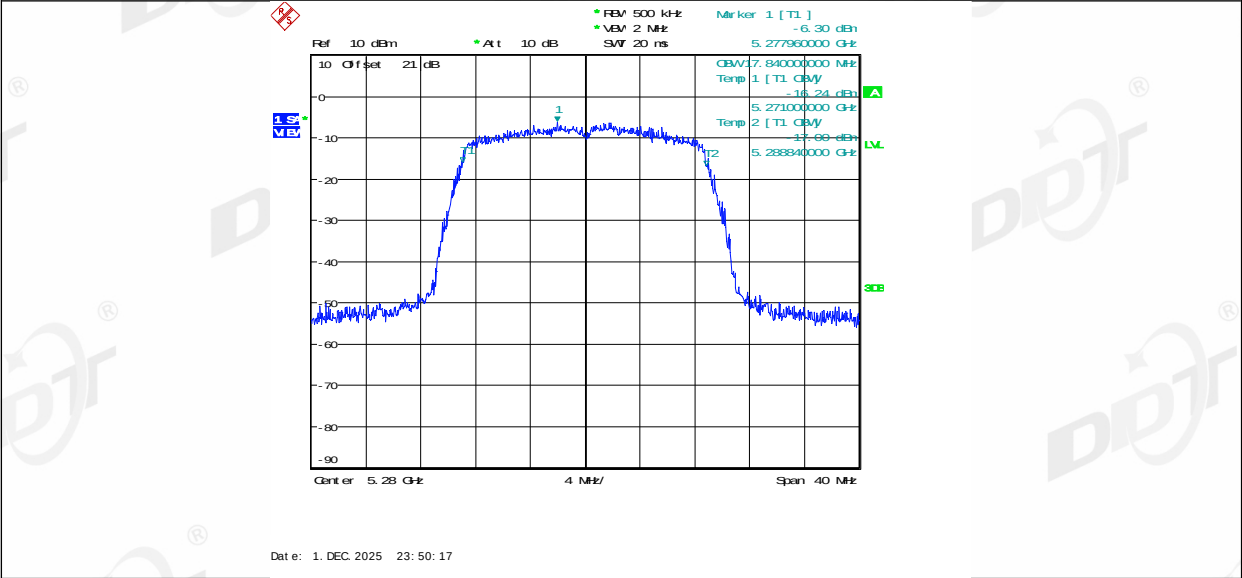


11N20MIMO_Ant2_5280

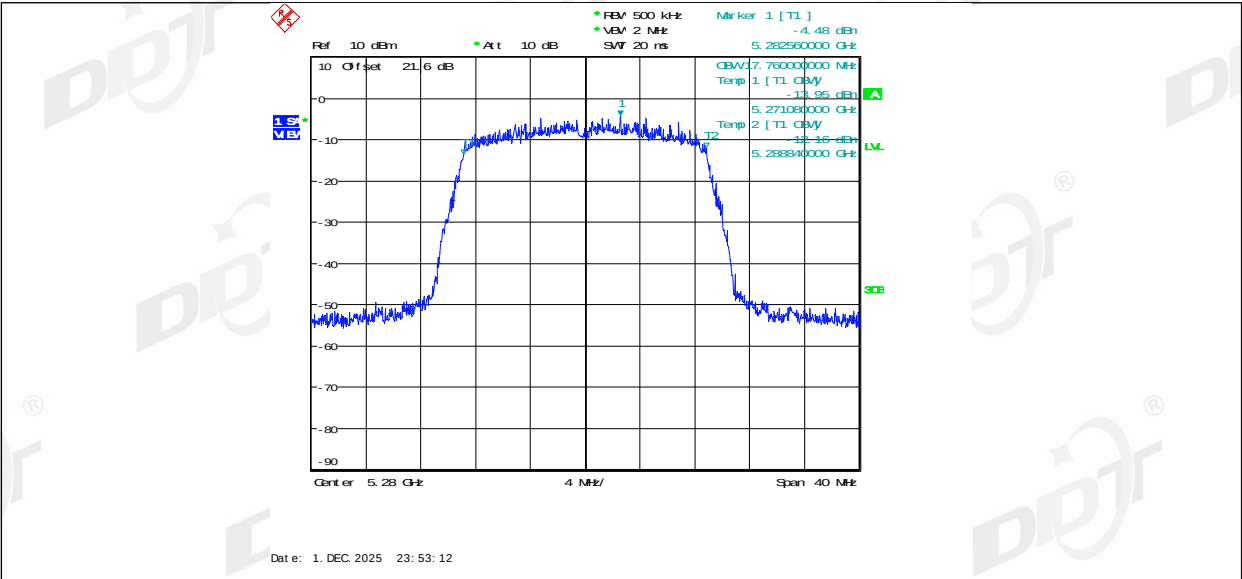


11N20MIMO_Ant1_5320

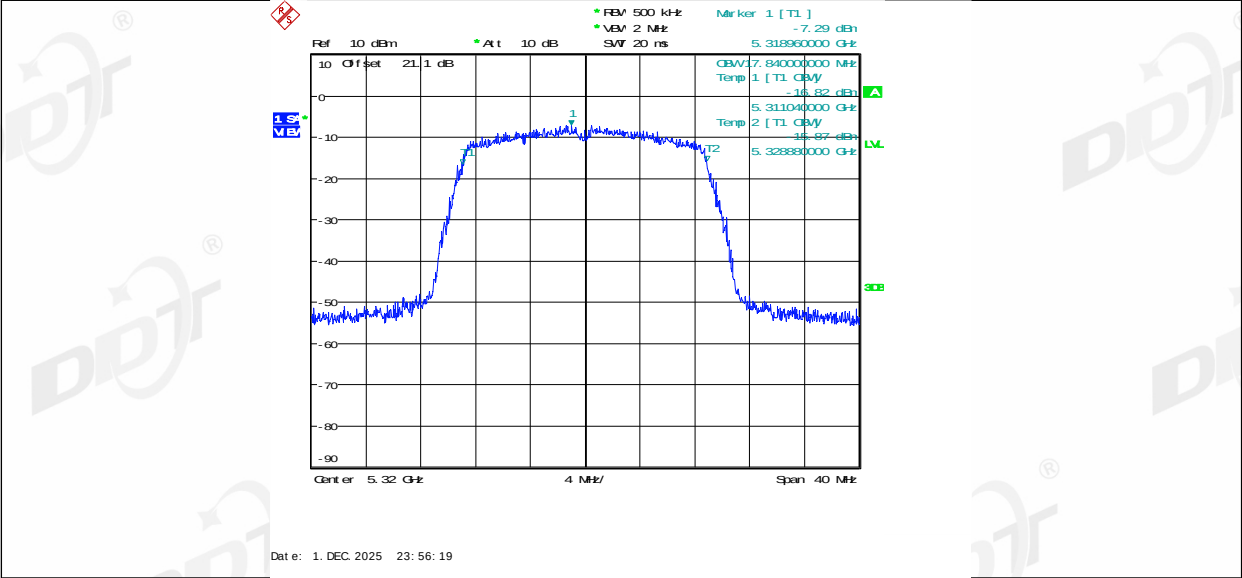


11N20MIMO_Ant2_5320

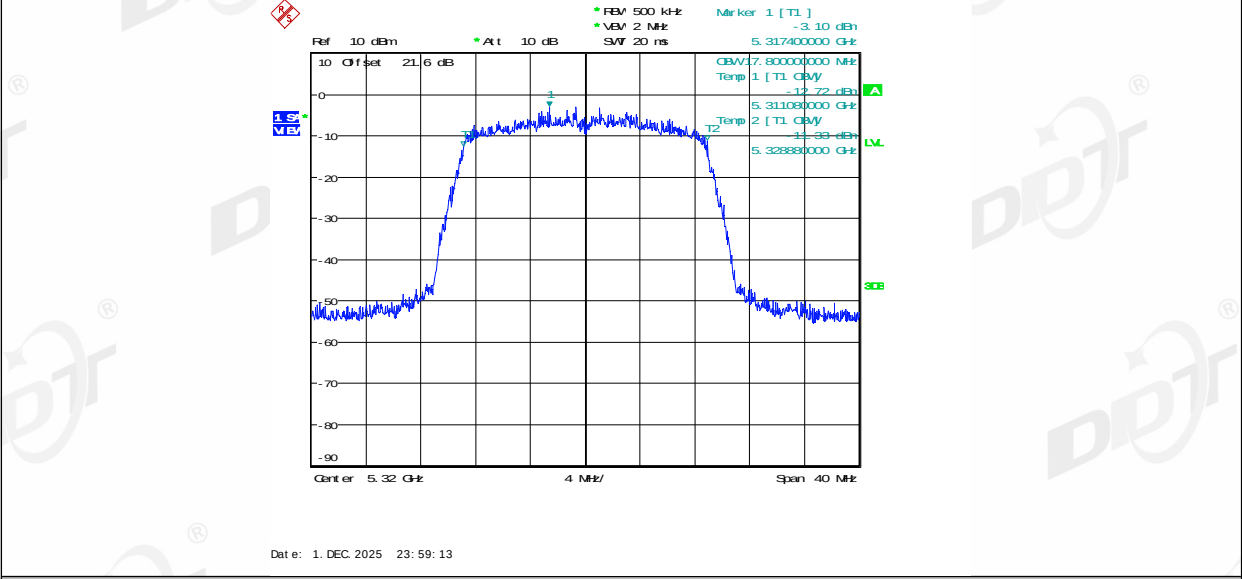


11N20MIMO_Ant1_5500

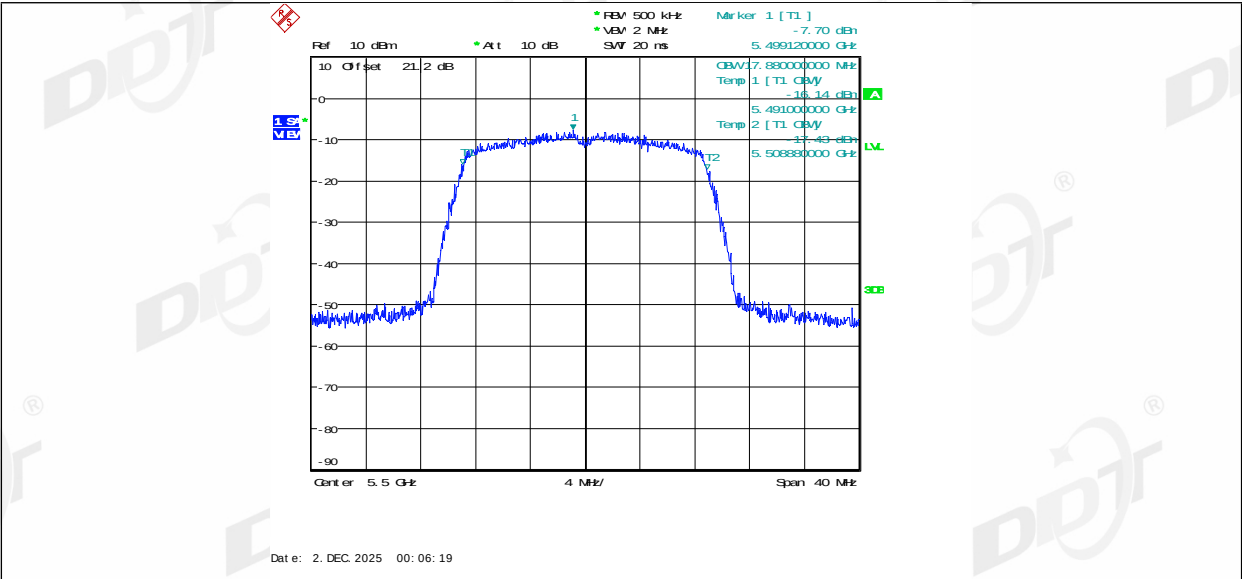




11N20MIMO_Ant2_5500

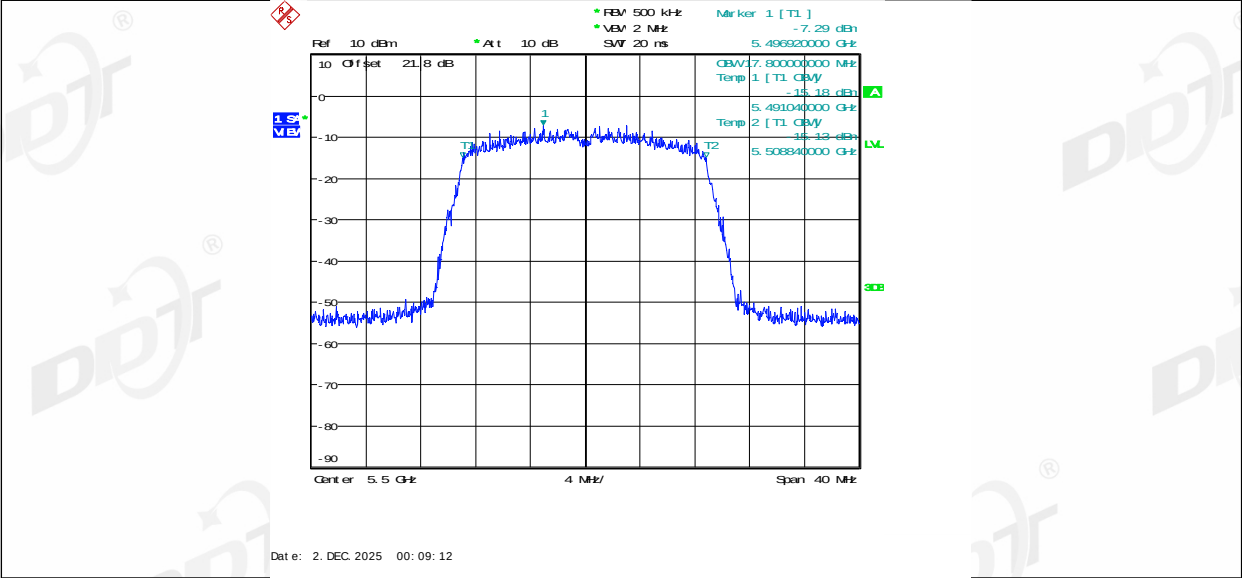


11N20MIMO_Ant1_5580

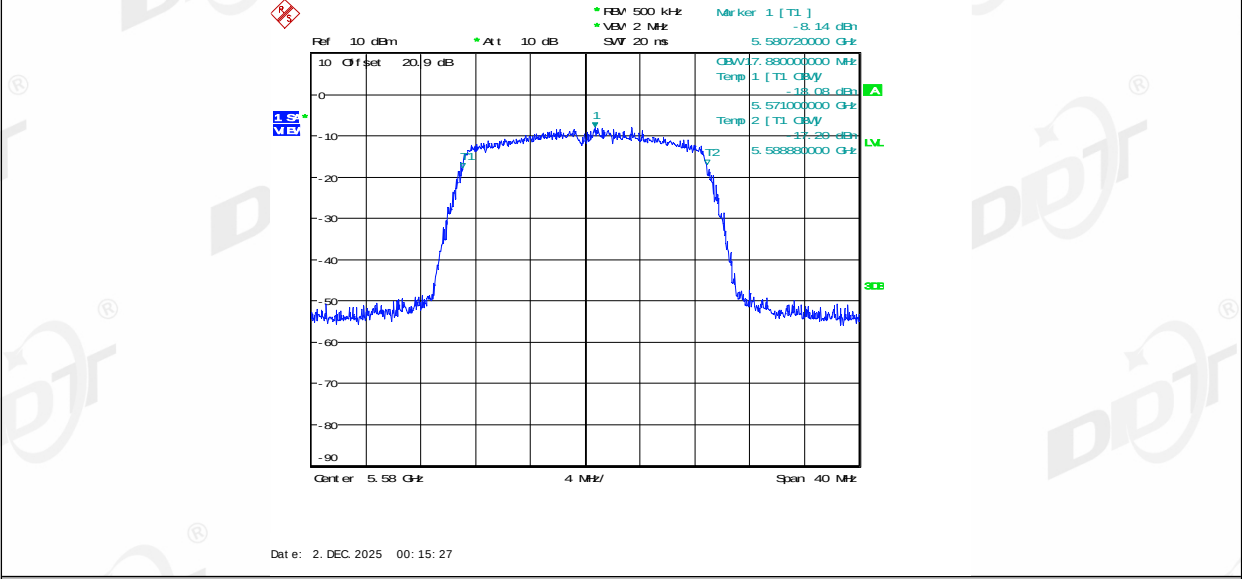


11N20MIMO_Ant2_5580

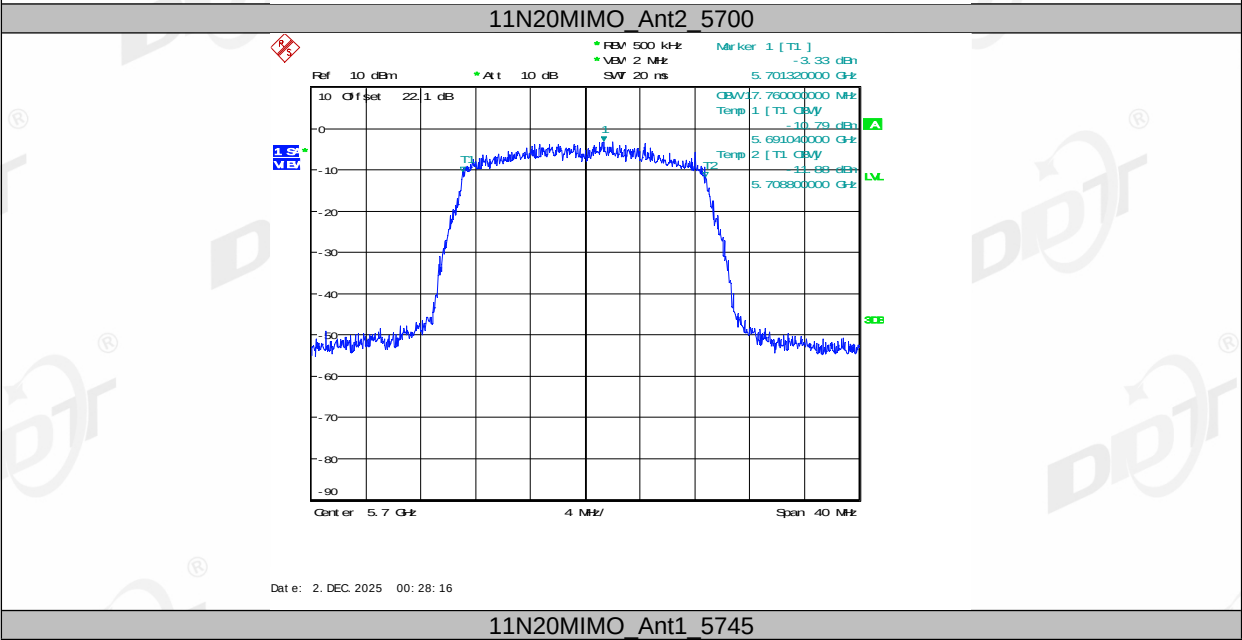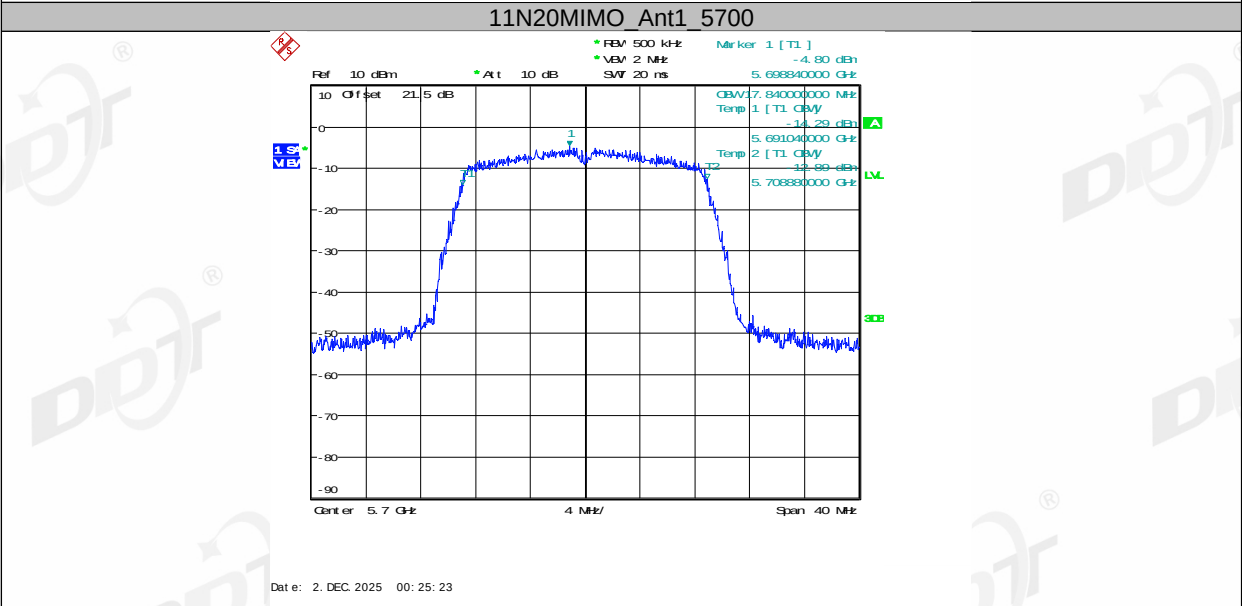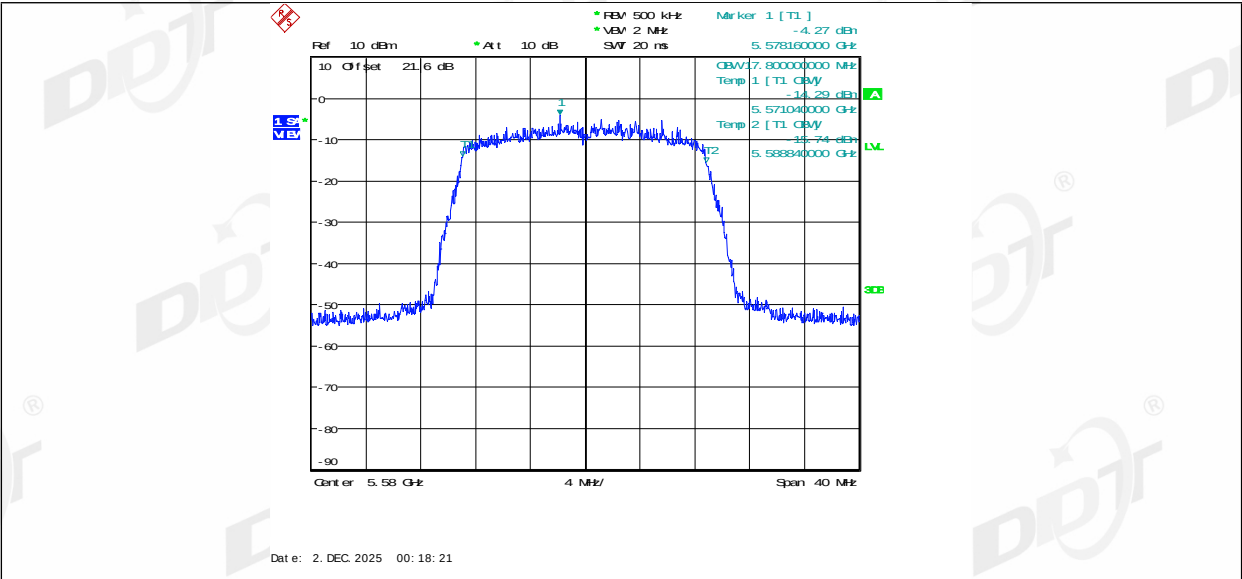


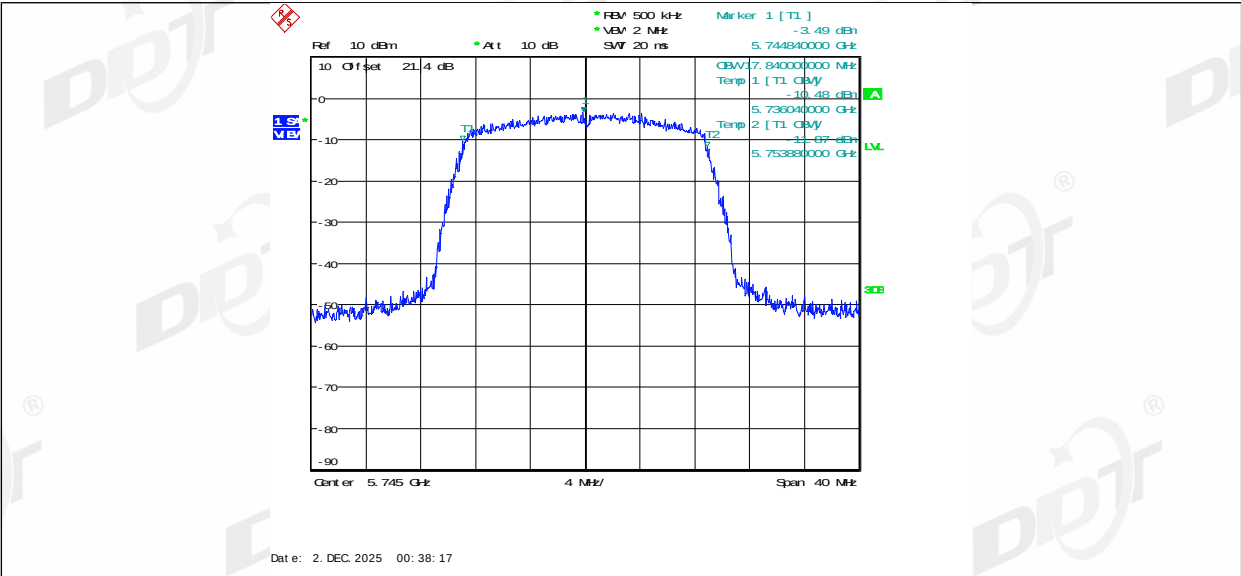




11N20MIMO_Ant2_5745

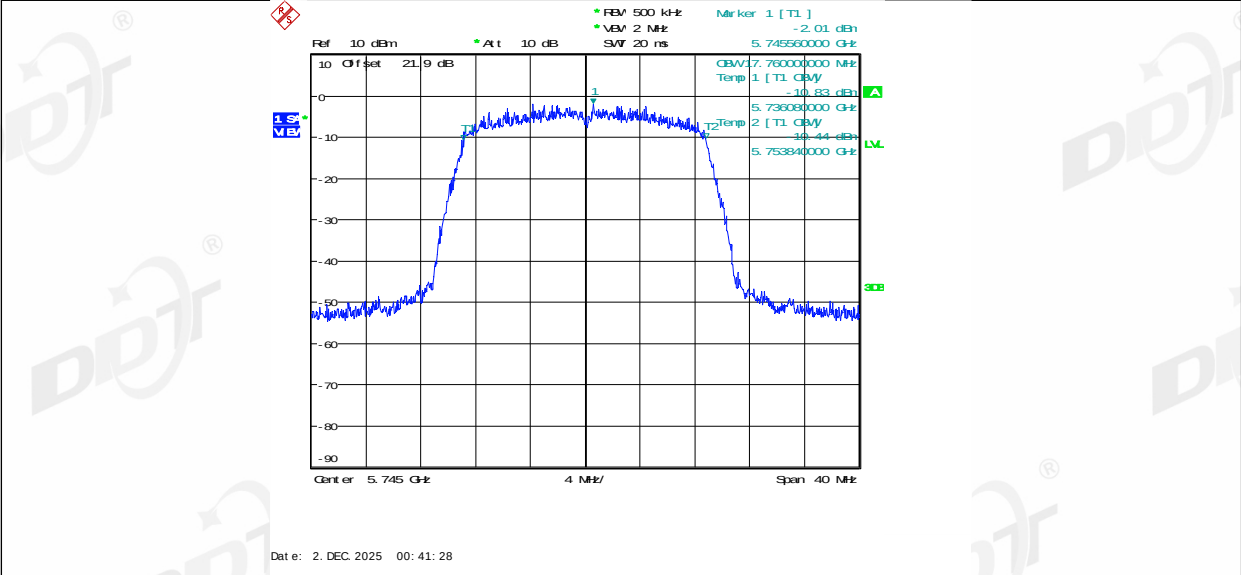


11N20MIMO_Ant1_5785

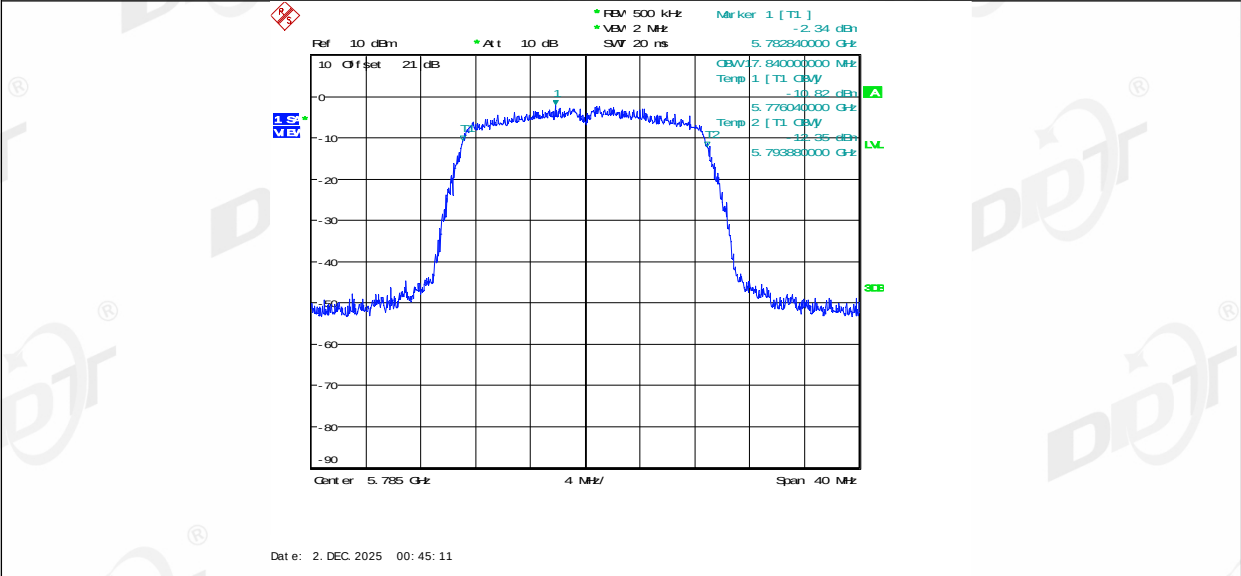


11N20MIMO_Ant2_5785

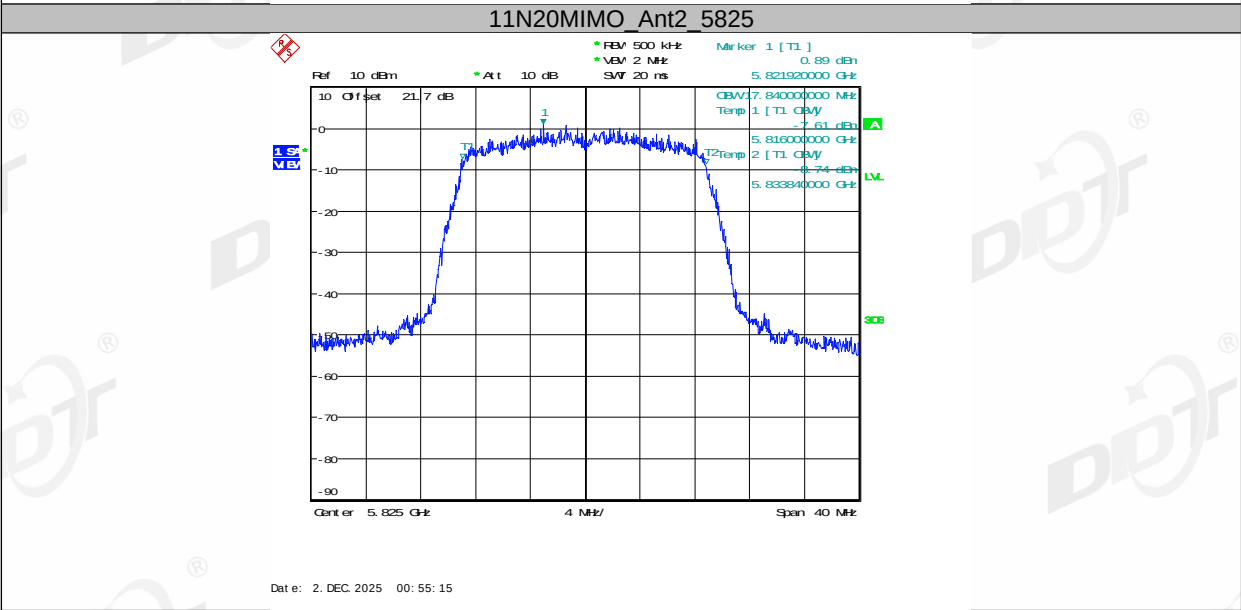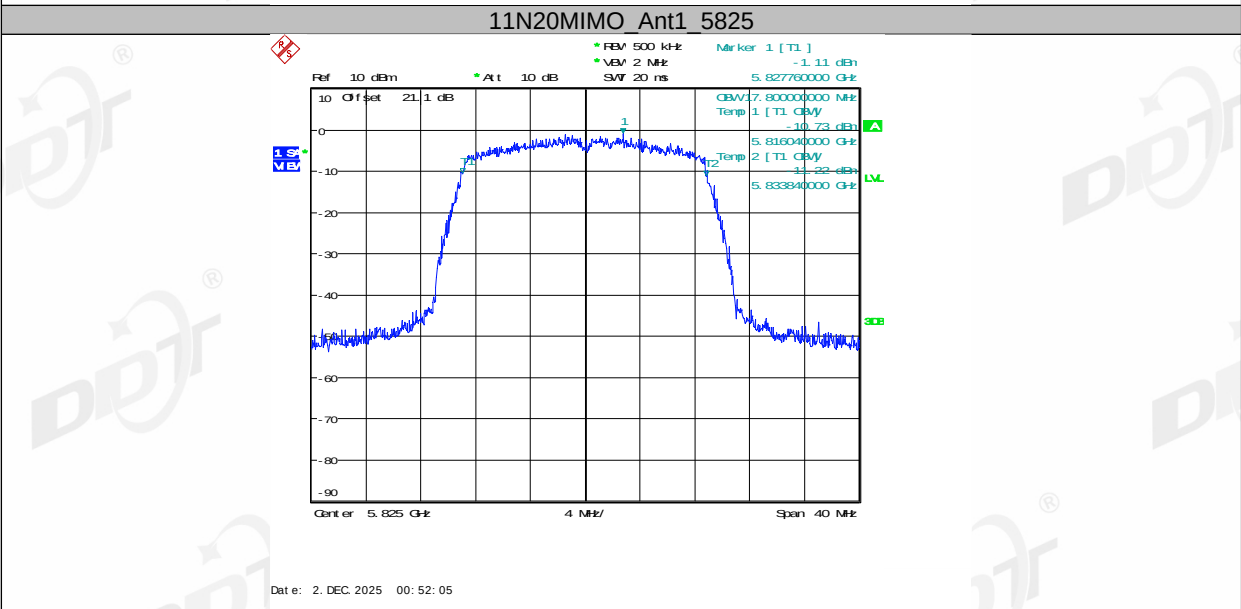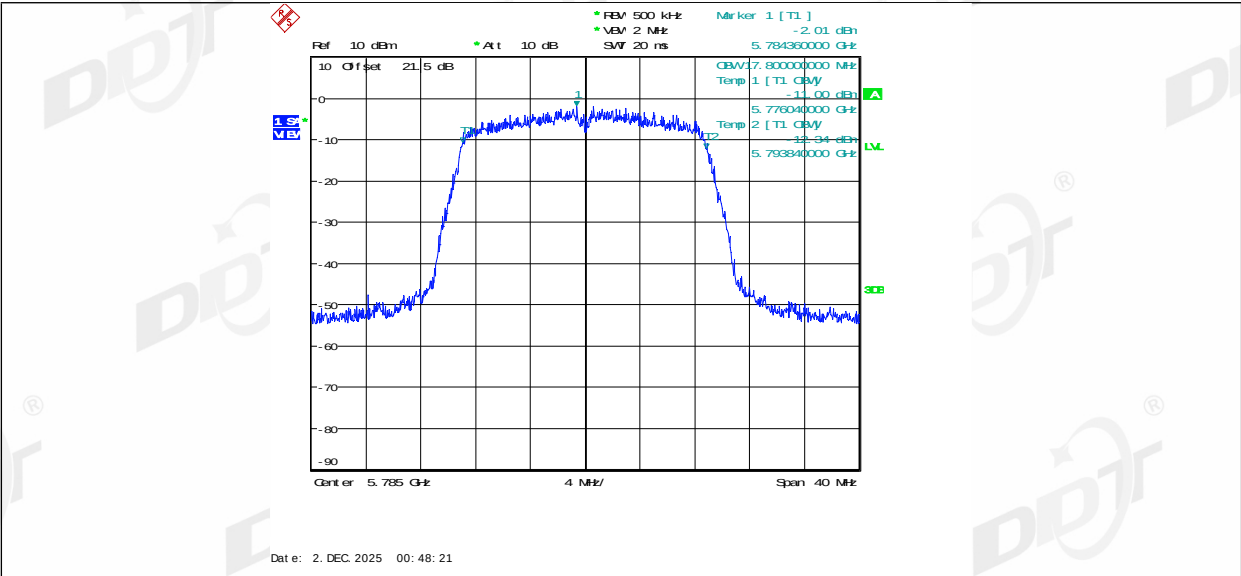


11N40MIMO_Ant1_5190

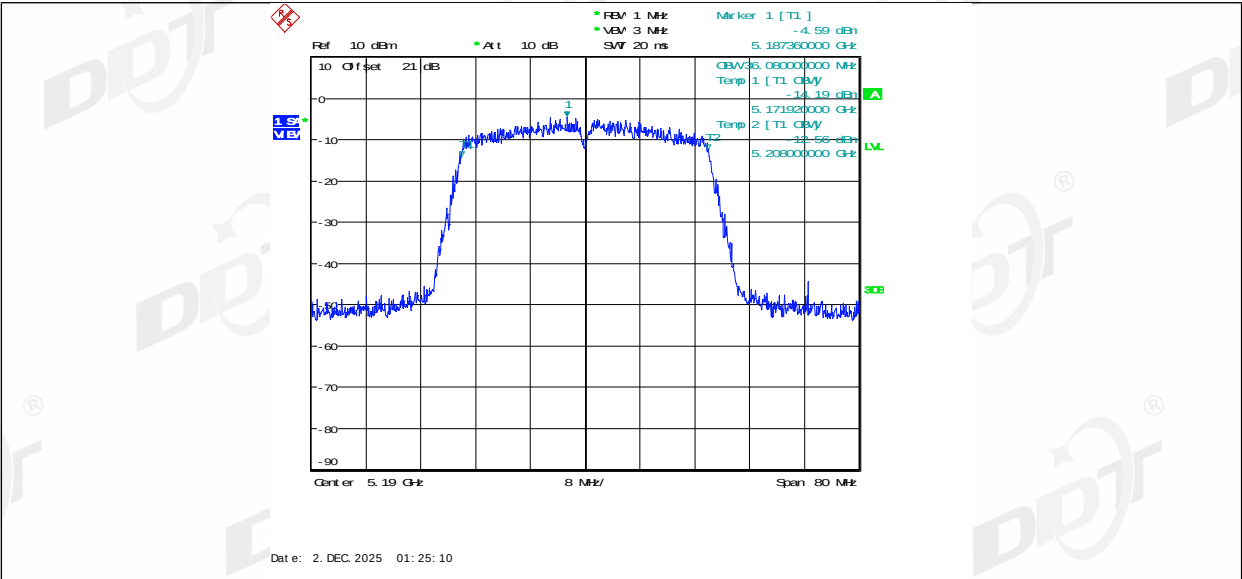


11N40MIMO_Ant2_5190

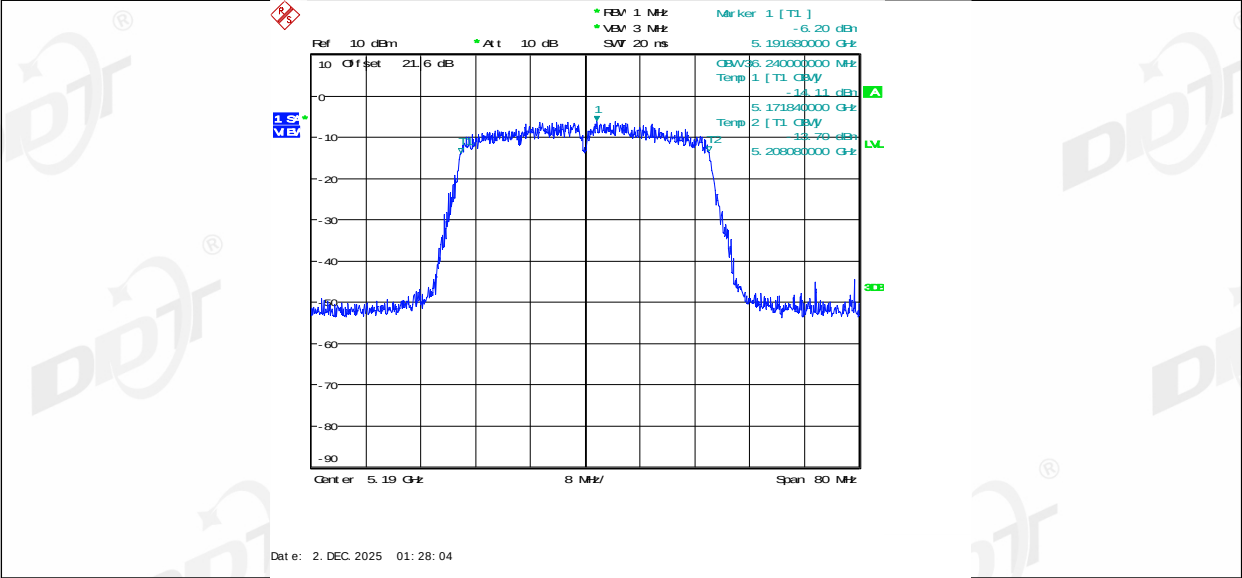

11N40MIMO_Ant1_5230

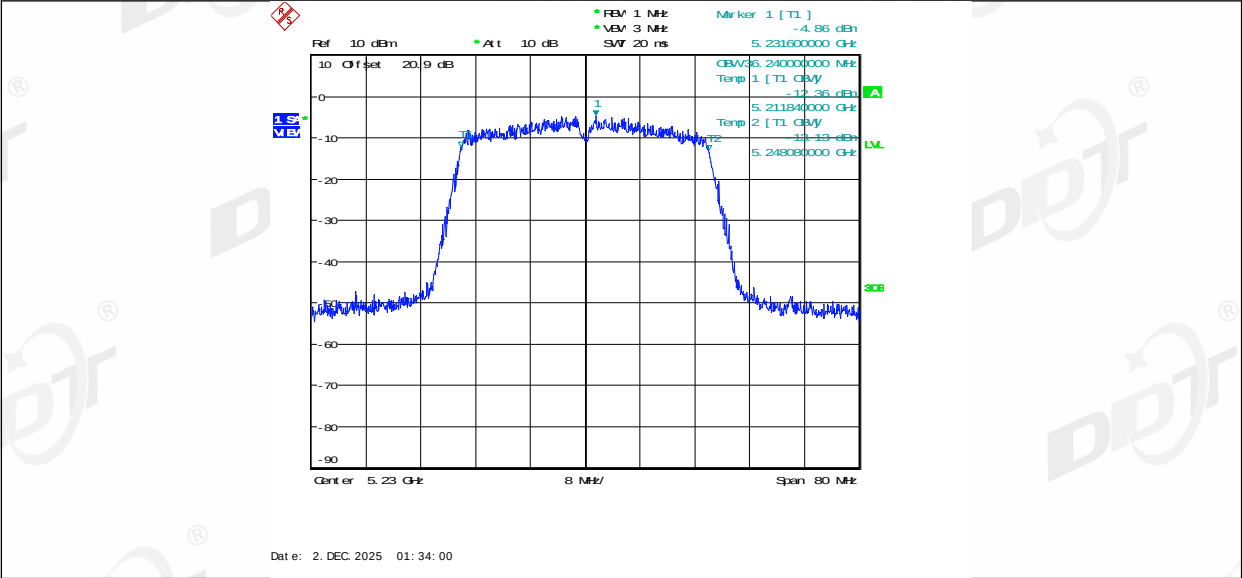


11N40MIMO_Ant2_5230

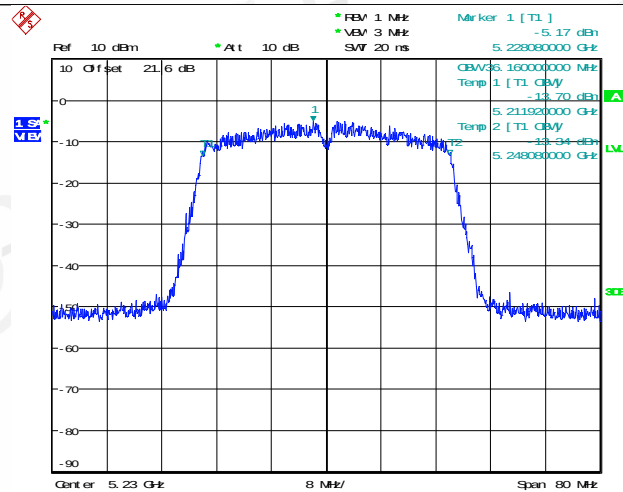


Date: 2. DEC. 2025 01:36:53

11N40MIMO_Ant1_5270

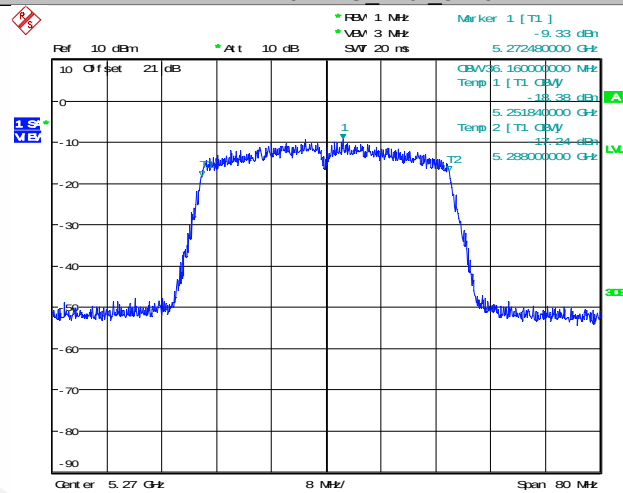


Date: 2. DEC. 2025 01:43:12

11N40MIMO_Ant2_5270

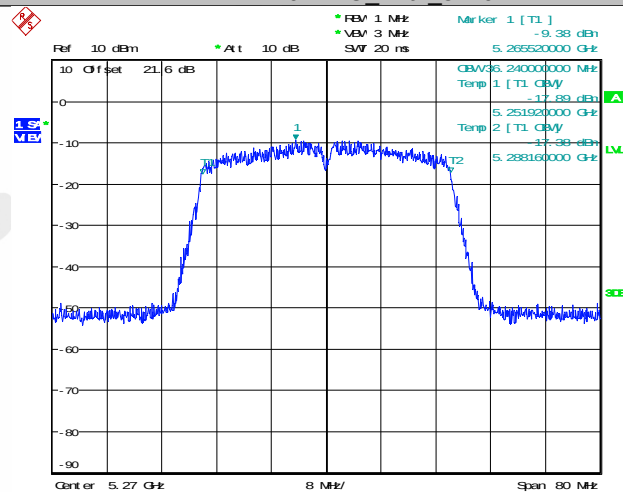


Dat e: 2. DEC. 2025 01:46:06


11N40MIMO Ant1 5310

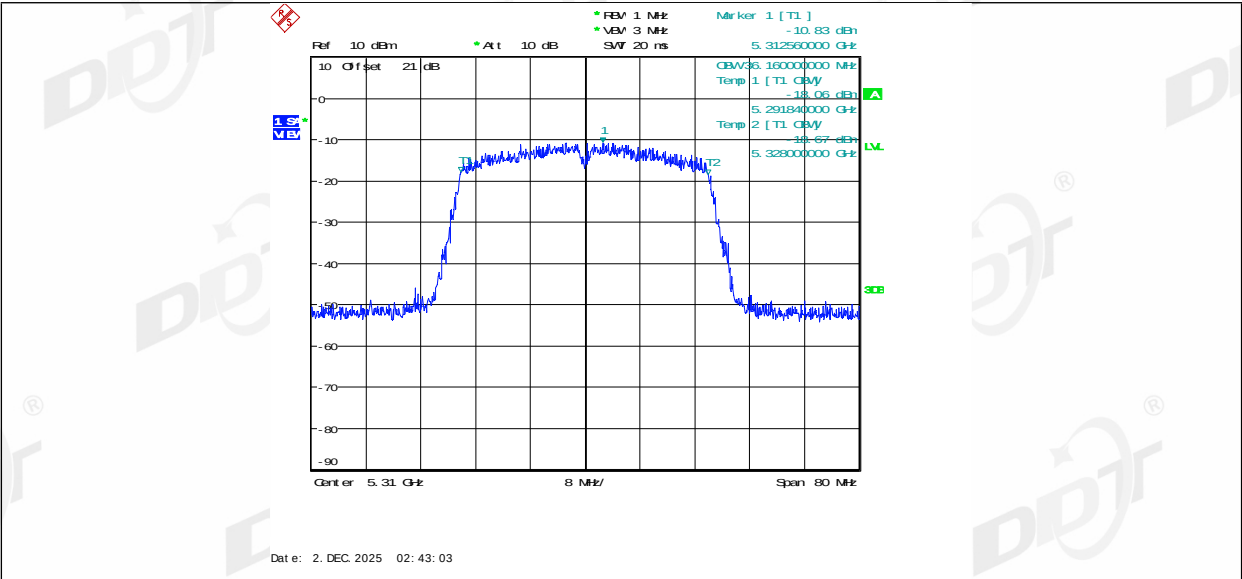

11N40MIMO_Ant2_5310

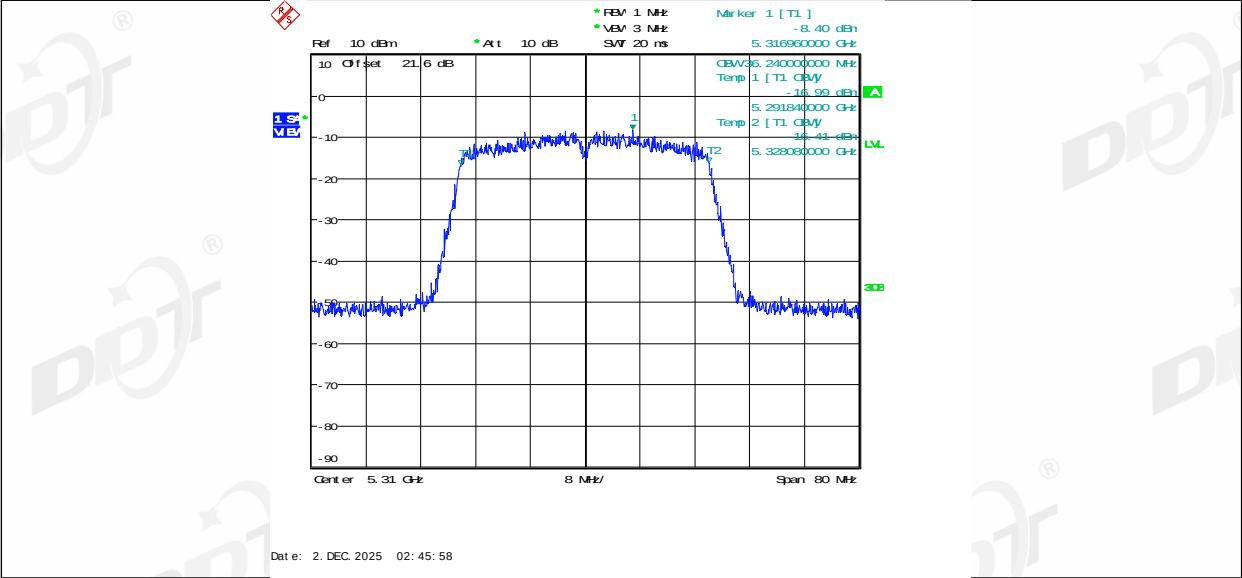

11N40MIMO_Ant1_5510

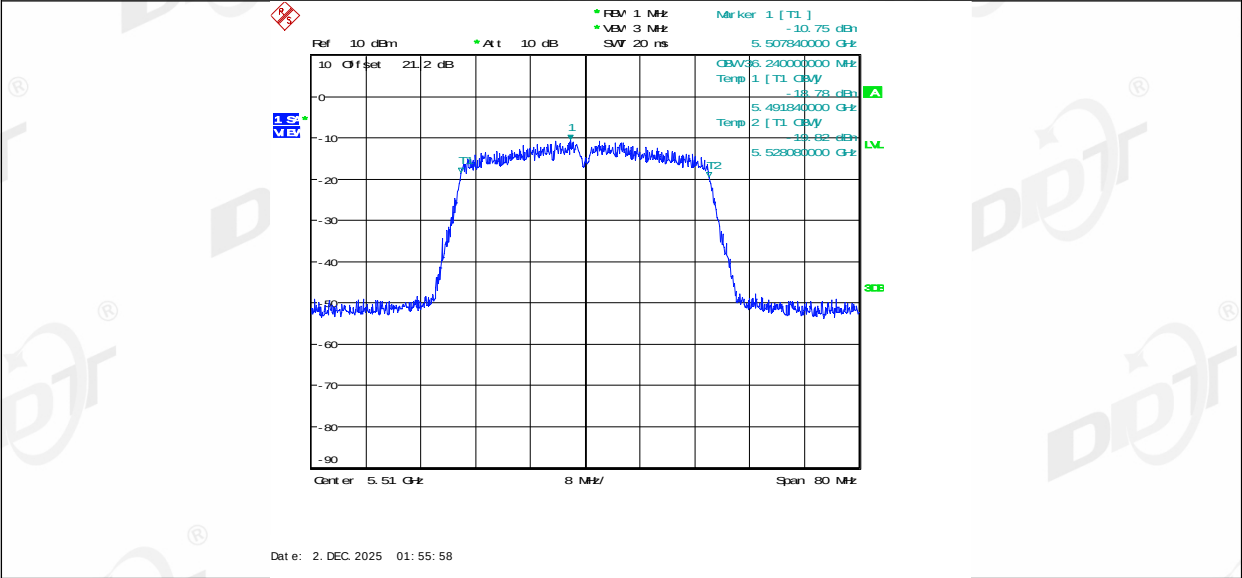

11N40MIMO_Ant2_5510